

Custom Band: CW, BACK
Room Ambient Temperature: 23.0°C

Exposure Conditions

Band	Custom Band	Phantom Section / TSL	5G / Air
Frequency [MHz] / Channel Number	25200.0 / 25200000	Test Distance [mm]	2.00
Group / UID	CW / 0--	Conversion Factor	1.0

DASY Configuration


Probe Calibration Date	EUmmWV4 - SN9536_F1-55GHz 2026-02-16	Phantom	mmWave
DAE Calibration Date	DAE4ip Sn1667 2025-09-16	TSL Type	Air
Software Version	3.2.2.2358		

Scan Setup

	Area Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.17158298424721127 x 0.17158298424721127
Sensor Surface [mm]	2.0

Measurement Results

	5G Scan
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	4.31
psPDtot+ [W/m²]	5.39
psPDmod+ [W/m²]	5.78
E _{max} [V/m]	83.6
Power Drift [dB]	-0.03

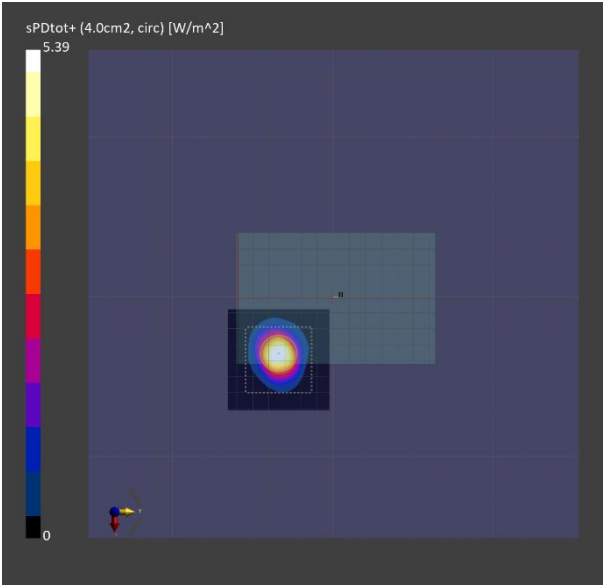

Custom Band: CW, BACK
Room Ambient Temperature: 23.0°C

Exposure Conditions

Band	Custom Band	Phantom Section / TSL	5G / Air
Frequency [MHz] / Channel Number	24350.0 / 24350000	Test Distance [mm]	2.00
Group / UID	CW / 0--	Conversion Factor	1.0

DASY Configuration


Probe Calibration Date	EUmmWV4 - SN9536_F1-55GHz 2026-02-16	Phantom	mmWave
DAE Calibration Date	DAE4ip Sn1667 2025-09-16	TSL Type	Air
Software Version	3.2.2.2358		

Scan Setup

	Area Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.1657954629531585 x 0.1657954629531585
Sensor Surface [mm]	2.0

Measurement Results

	5G Scan
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	4.77
psPDtot+ [W/m²]	5.79
psPDmod+ [W/m²]	6.16
E _{max} [V/m]	88.8
Power Drift [dB]	0.02

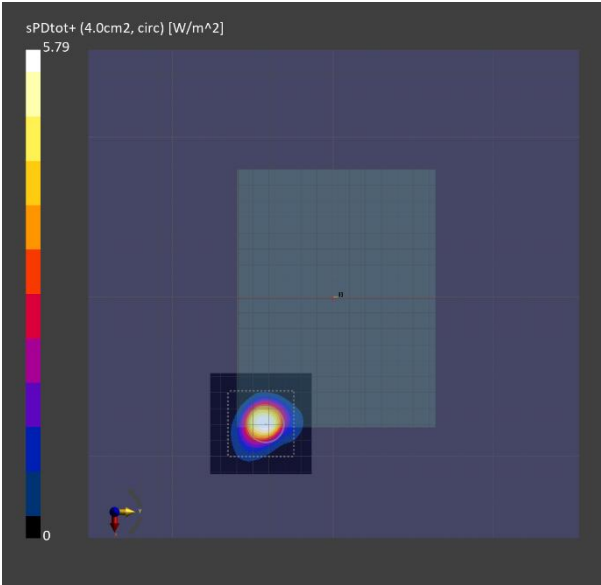

Custom Band: CW, BACK
Room Ambient Temperature: 23.0°C

Exposure Conditions

Band	Custom Band	Phantom Section / TSL	5G / Air
Frequency [MHz] / Channel Number	27550.1 / 27550100	Test Distance [mm]	2.00
Group / UID	CW / 0--	Conversion Factor	1.0

DASY Configuration


Probe Calibration Date	EUmmWV4 - SN9536_F1-55GHz 2026-02-16	Phantom	mmWave
DAE Calibration Date	DAE4ip Sn1667 2025-09-16	TSL Type	Air
Software Version	3.2.2.2358		

Scan Setup

	Area Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.18758445929797996 x 0.18758445929797996
Sensor Surface [mm]	2.0

Measurement Results

	5G Scan
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	4.65
psPDtot+ [W/m²]	6.63
psPDmod+ [W/m²]	6.99
E _{max} [V/m]	91.0
Power Drift [dB]	-0.11

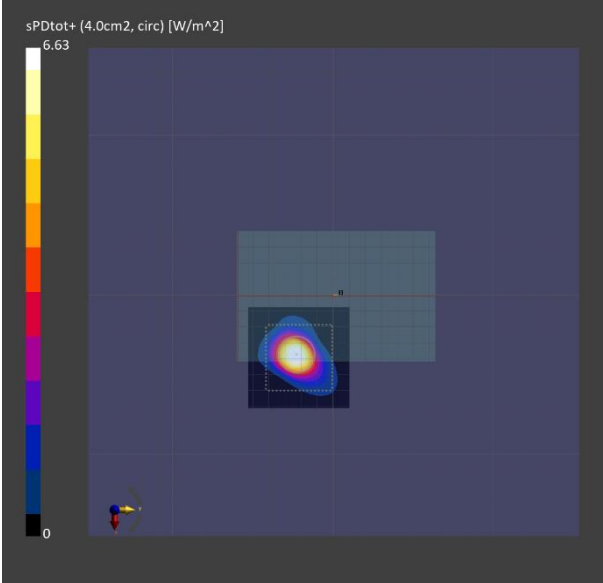

Custom Band: CW, BACK
Room Ambient Temperature: 23.0°C

Exposure Conditions

Band	Custom Band	Phantom Section / TSL	5G / Air
Frequency [MHz] / Channel Number	27925.0 / 27925000	Test Distance [mm]	2.00
Group / UID	CW / 0--	Conversion Factor	1.0

DASY Configuration


Probe Calibration Date	EUmmWV4 - SN9536_F1-55GHz 2026-02-16	Phantom	mmWave
DAE Calibration Date	DAE4ip Sn1667 2025-09-16	TSL Type	Air
Software Version	3.2.2.2358		

Scan Setup

	Area Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.1901370966310863 x 0.1901370966310863
Sensor Surface [mm]	2.0

Measurement Results

	5G Scan
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	5.02
psPDtot+ [W/m²]	6.38
psPDmod+ [W/m²]	6.62
E _{max} [V/m]	84.2
Power Drift [dB]	0.04

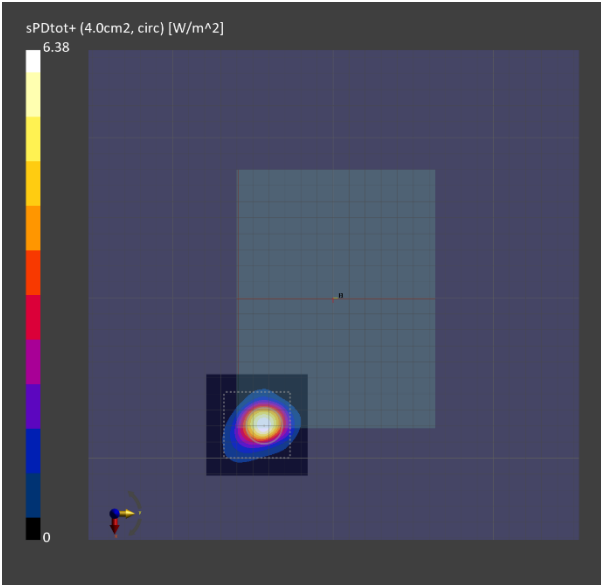

Custom Band: CW, BACK
Room Ambient Temperature: 23.0°C

Exposure Conditions

Band	Custom Band	Phantom Section / TSL	5G / Air
Frequency [MHz] / Channel Number	37050.0 / 37050000	Test Distance [mm]	2.00
Group / UID	CW / 0--	Conversion Factor	1.0

DASY Configuration


Probe Calibration Date	EUmmWV4 - SN9536_F1-55GHz 2026-02-16	Phantom	mmWave
DAE Calibration Date	DAE4ip Sn1667 2025-09-16	TSL Type	Air
Software Version	3.2.2.2358		

Scan Setup

	Area Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0

Measurement Results

	5G Scan
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	5.39
psPDtot+ [W/m²]	6.69
psPDmod+ [W/m²]	7.11
E _{max} [V/m]	106
Power Drift [dB]	0.24

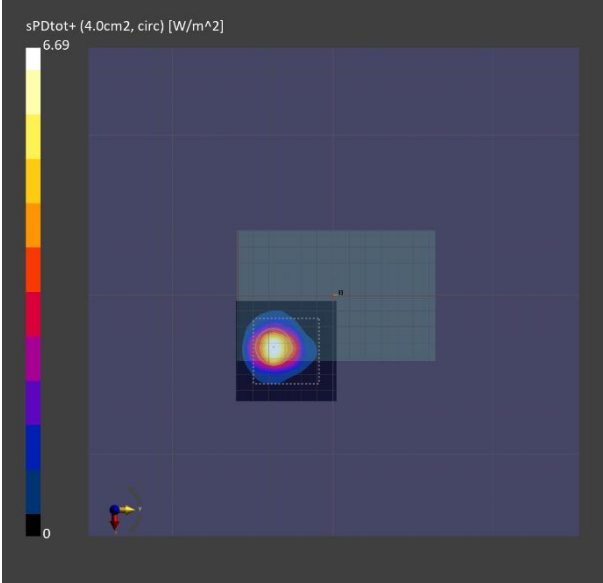

Custom Band: CW, BACK
Room Ambient Temperature: 23.0°C

Exposure Conditions

Band	Custom Band	Phantom Section / TSL	5G / Air
Frequency [MHz] / Channel Number	37050.0 / 37050000	Test Distance [mm]	2.00
Group / UID	CW / 0--	Conversion Factor	1.0

DASY Configuration

Probe Calibration Date	EUmmWV4 - SN9536_F1-55GHz 2026-02-16	Phantom	mmWave
DAE Calibration Date	DAE4ip Sn1667 2025-09-16	TSL Type	Air
Software Version	3.2.2.2358		

Scan Setup

	Area Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0

Measurement Results

	5G Scan
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	5.82
psPDtot+ [W/m²]	6.80
psPDmod+ [W/m²]	7.15
E _{max} [V/m]	98.0
Power Drift [dB]	0.02

