



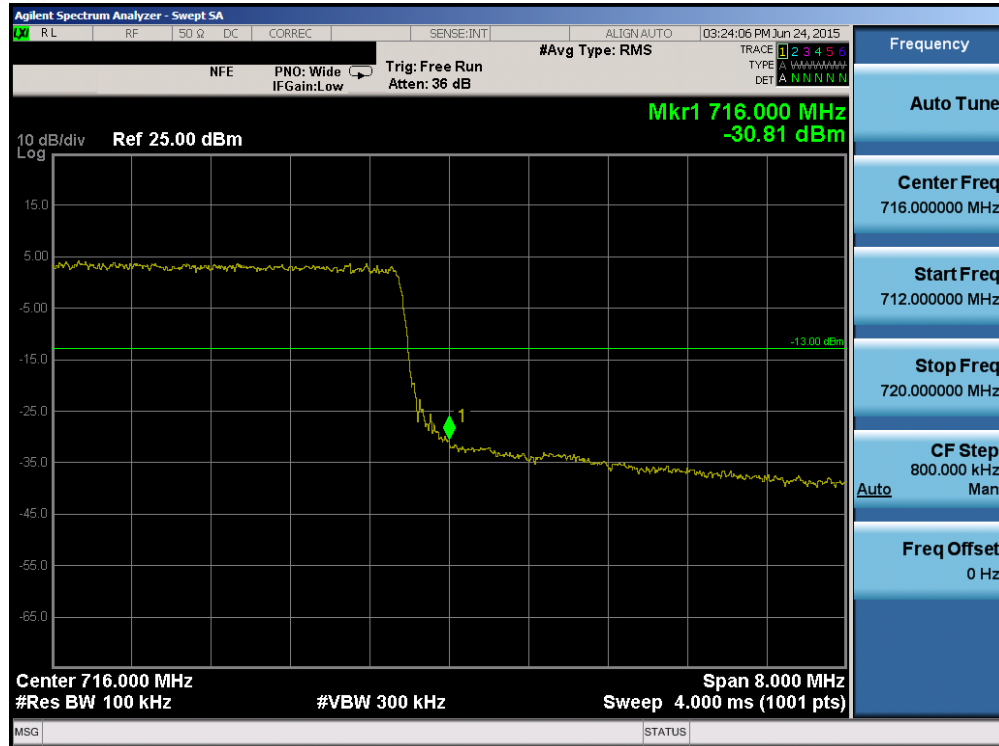


Plot 6-109. Upper Band Edge Plot (Band 12 – 10.0MHz QPSK – RB Size 50)

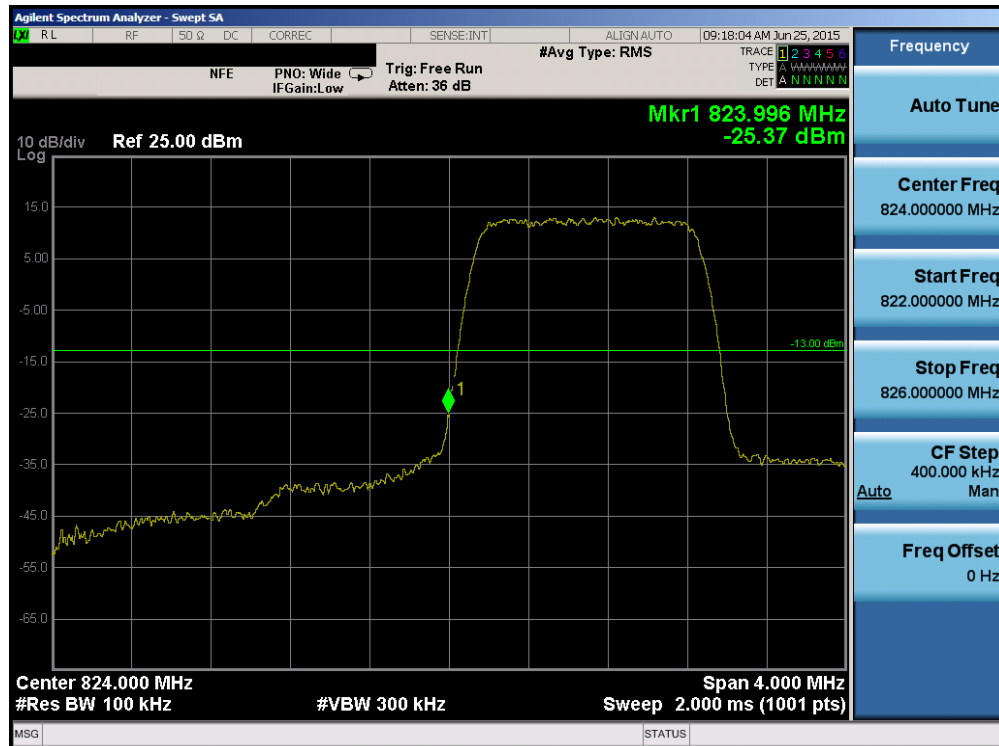


Plot 6-110. Lower Band Edge Plot (Band 5/26 – 1.4MHz QPSK – RB Size 6)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 71 of 142

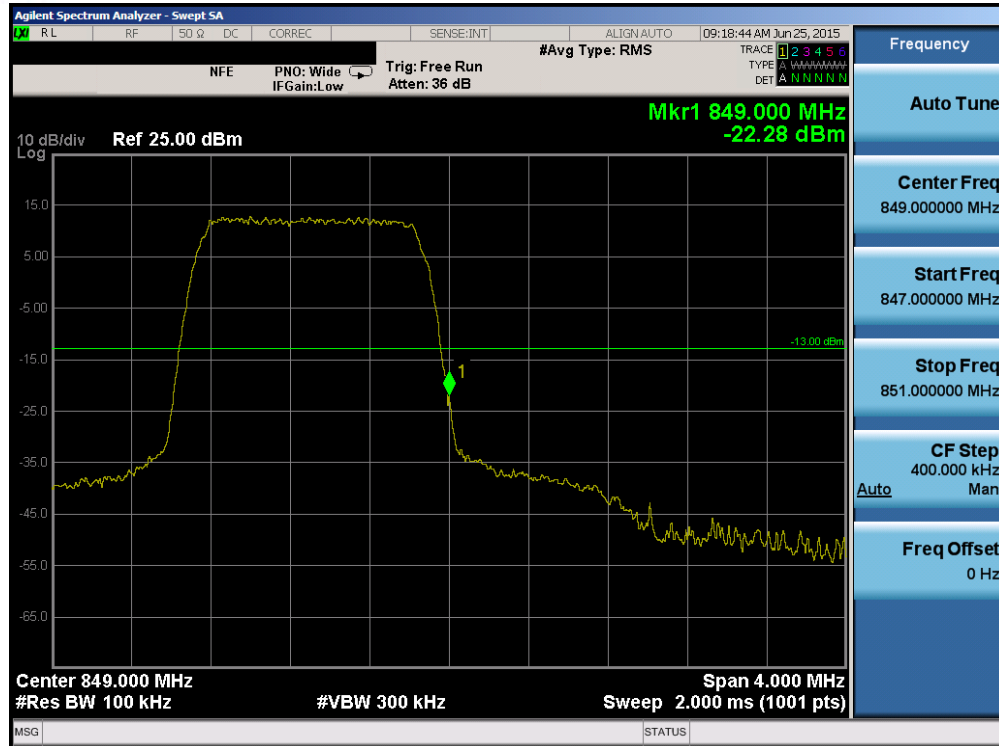


Plot 6-111. Upper Band Edge Plot (Band 5/26 – 1.4MHz QPSK – RB Size 6)

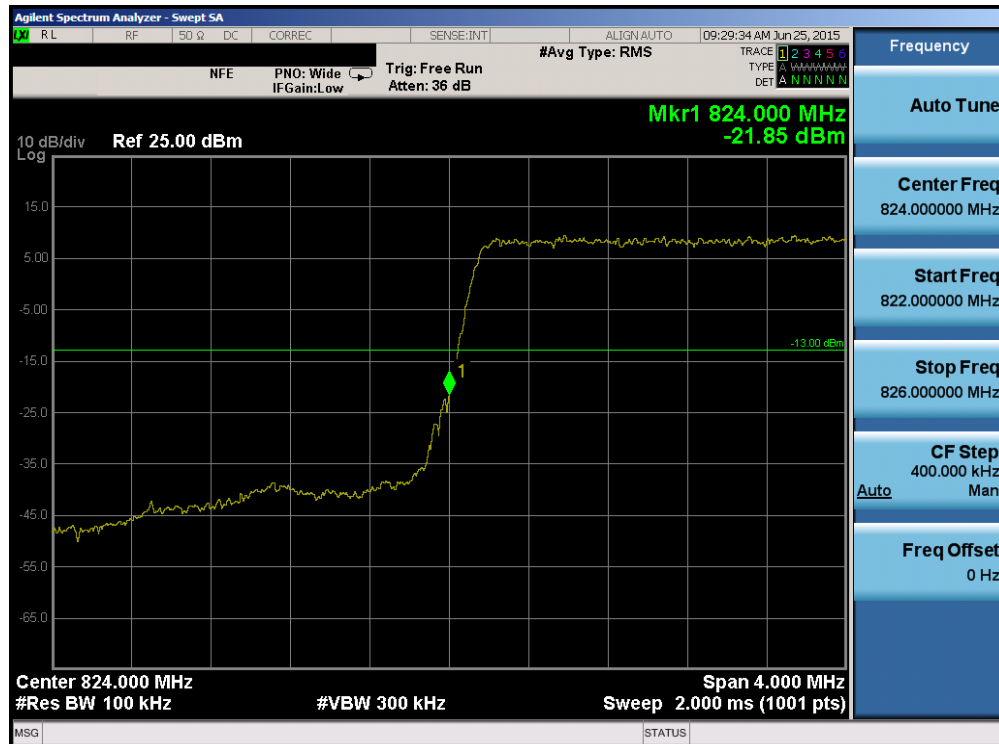


Plot 6-112. Lower Band Edge Plot (Band 5/26 – 3.0MHz QPSK – RB Size 15)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 72 of 142

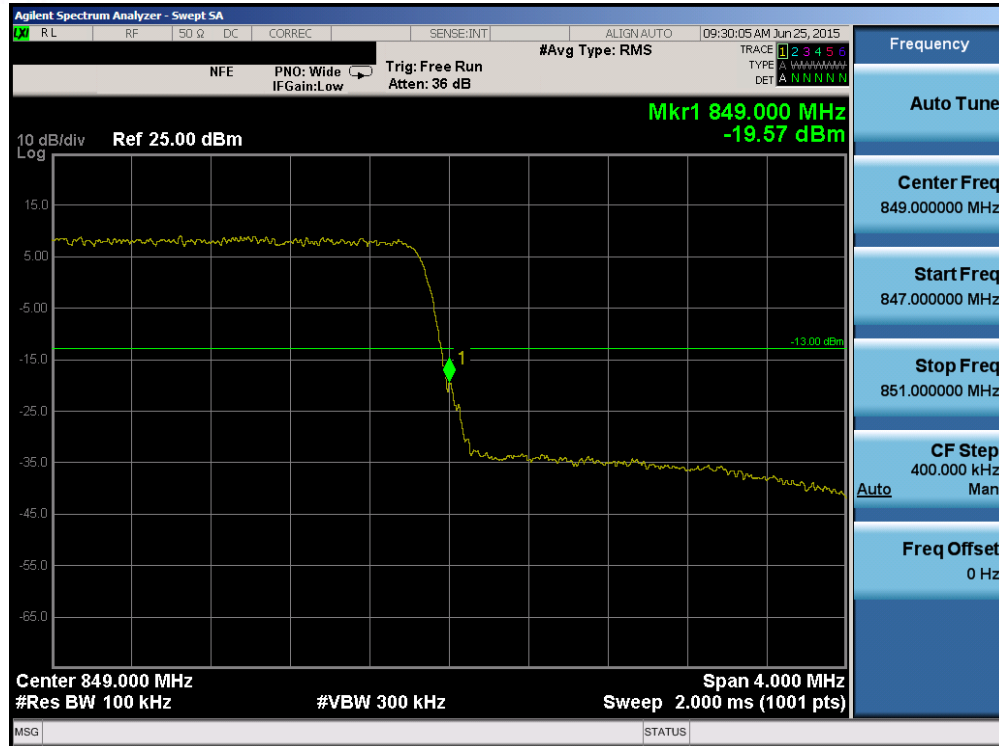


Plot 6-113. Upper Band Edge Plot (Band 5/26 – 3.0MHz QPSK – RB Size 15)

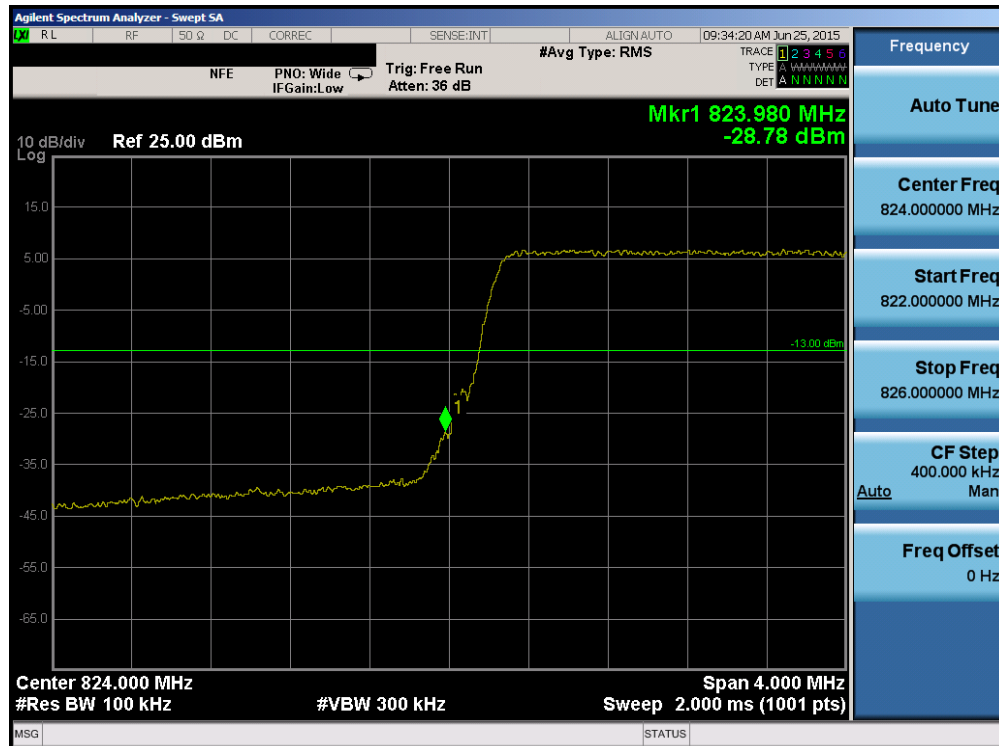


Plot 6-114. Lower Band Edge Plot (Band 5/26 – 5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 73 of 142

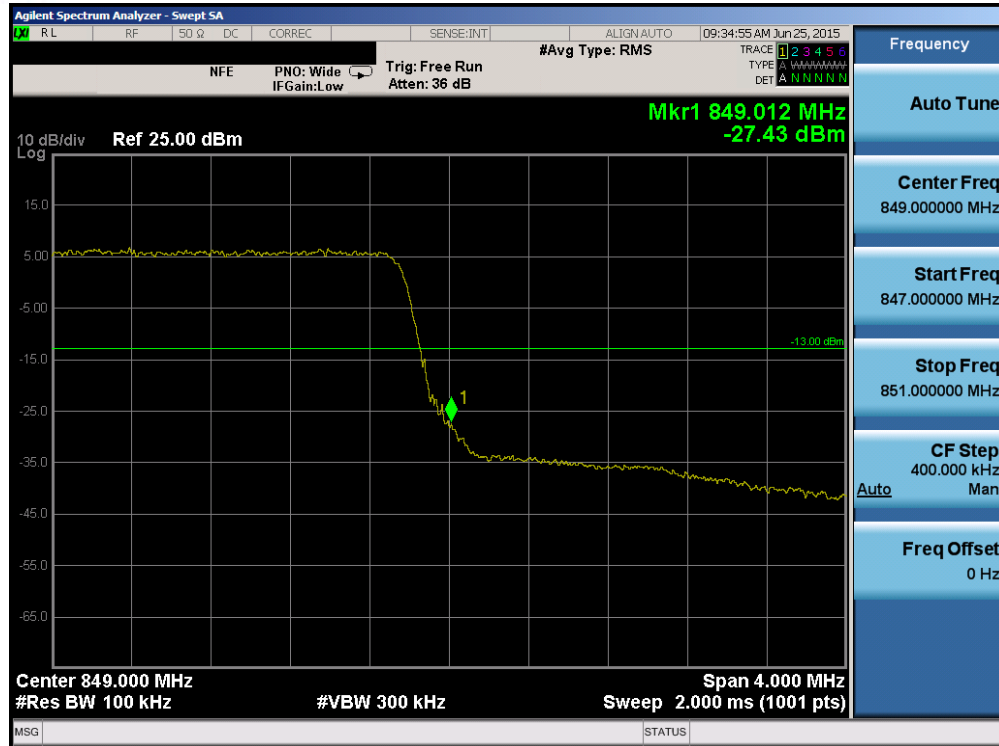


Plot 6-115. Upper Band Edge Plot (Band 5/26 – 5.0MHz QPSK – RB Size 25)

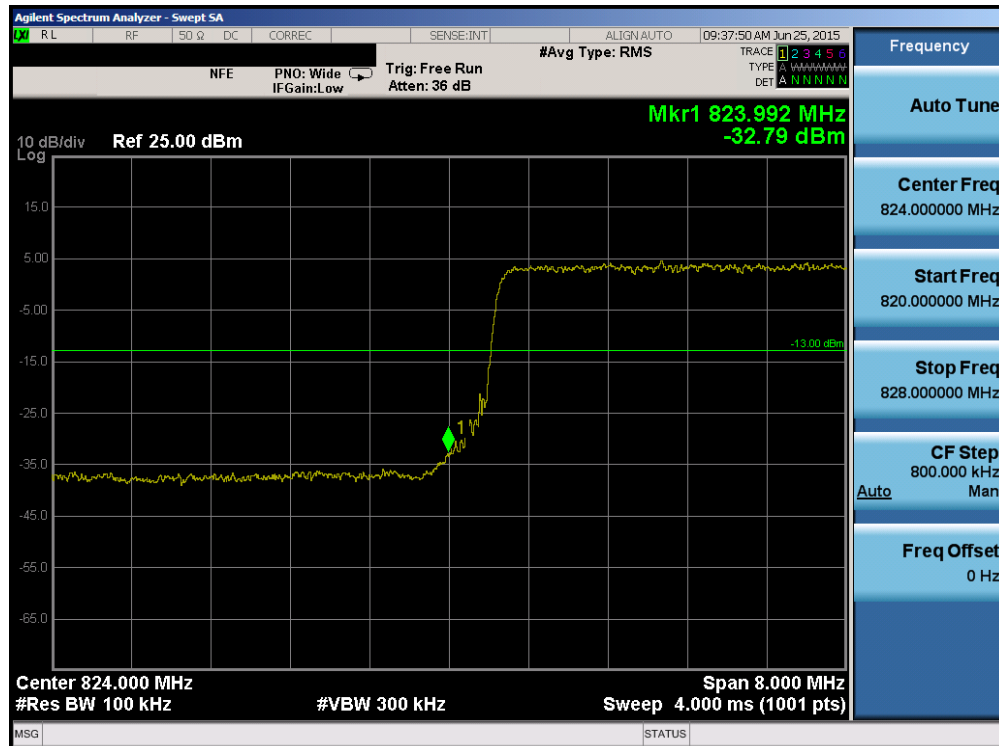


Plot 6-116. Lower Band Edge Plot (Band 5/26 – 10.0MHz QPSK – RB Size 50)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 74 of 142

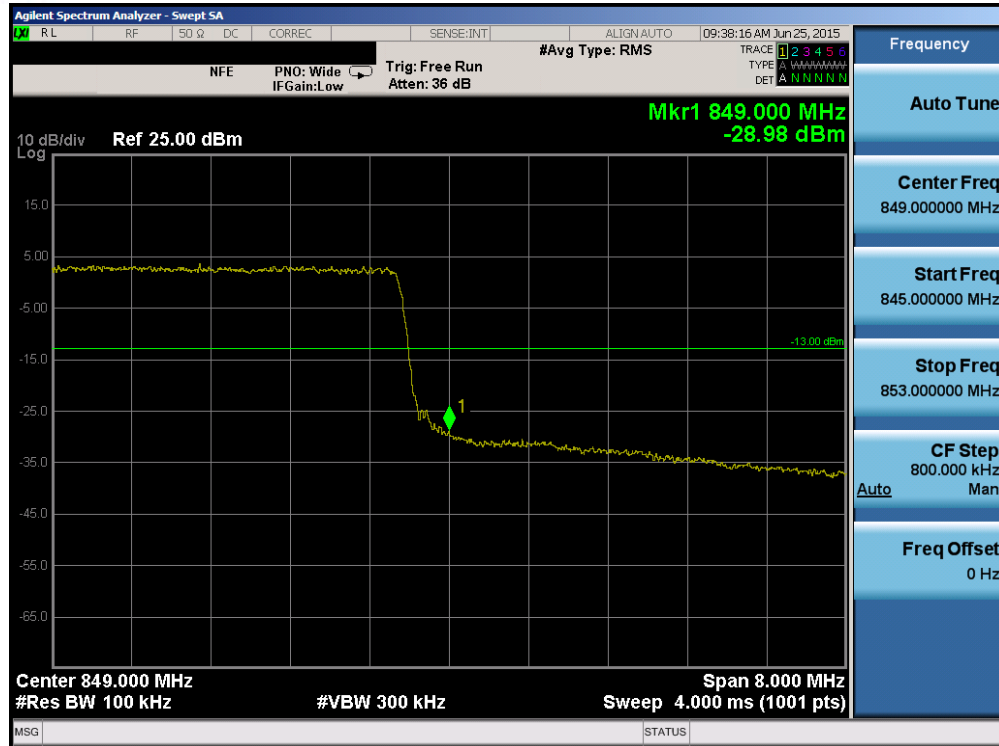


Plot 6-117. Upper Band Edge Plot (Band 5/26 – 10.0MHz QPSK – RB Size 50)

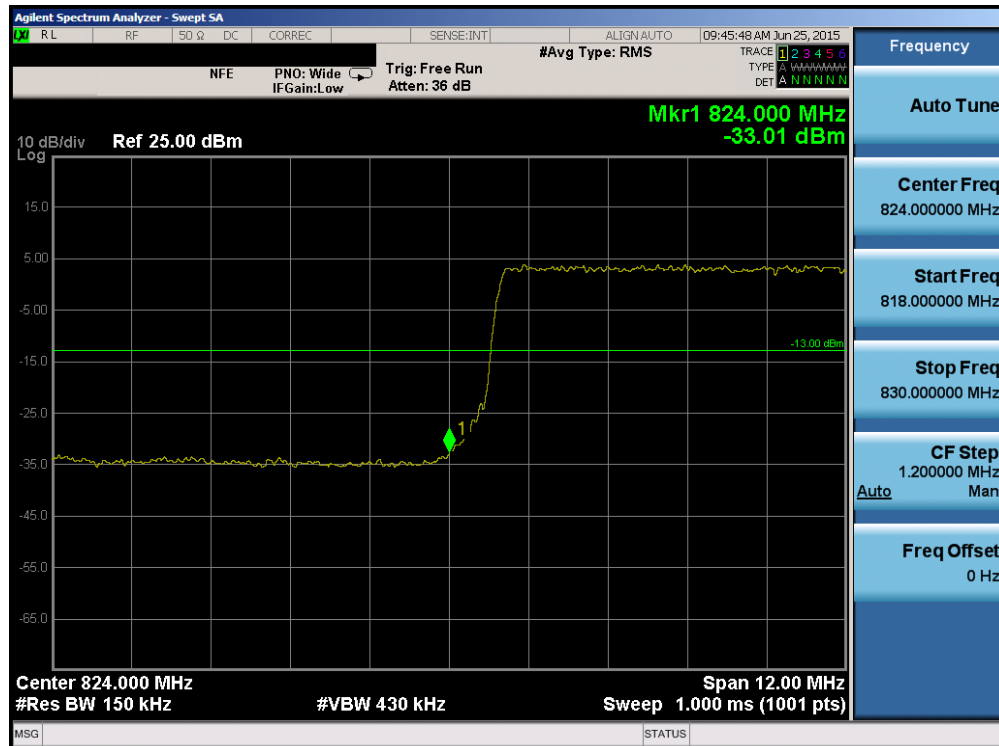


Plot 6-118. Lower Band Edge Plot (Band 5/26 – 15.0MHz QPSK – RB Size 75)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 75 of 142

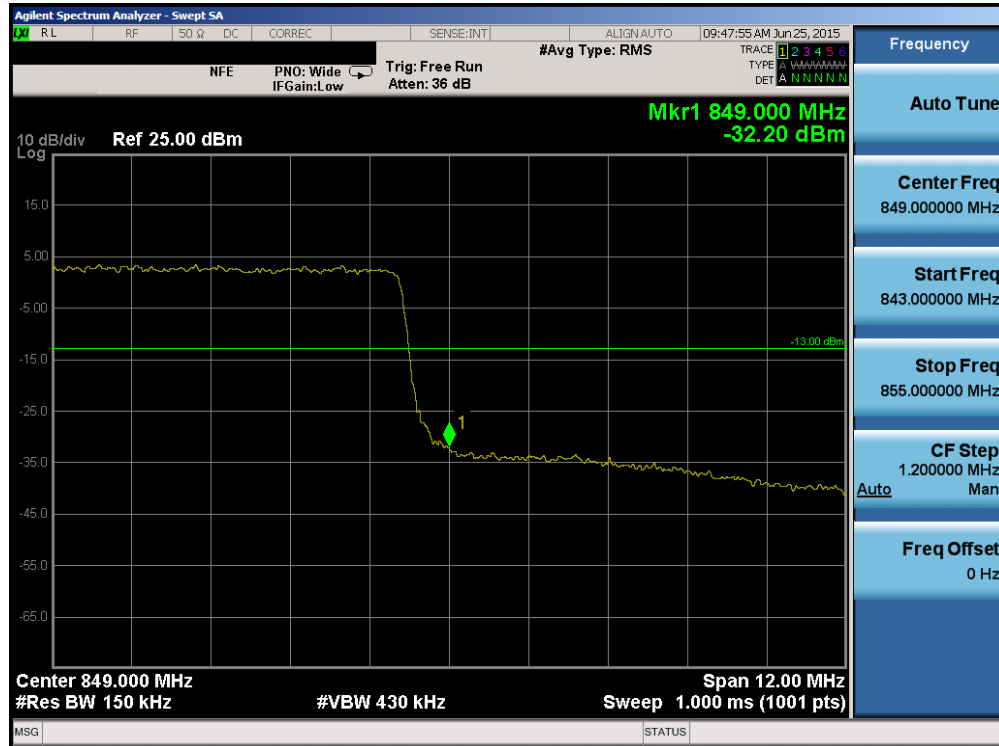


Plot 6-119. Upper Band Edge Plot (Band 5/26 – 15.0MHz QPSK – RB Size 75)

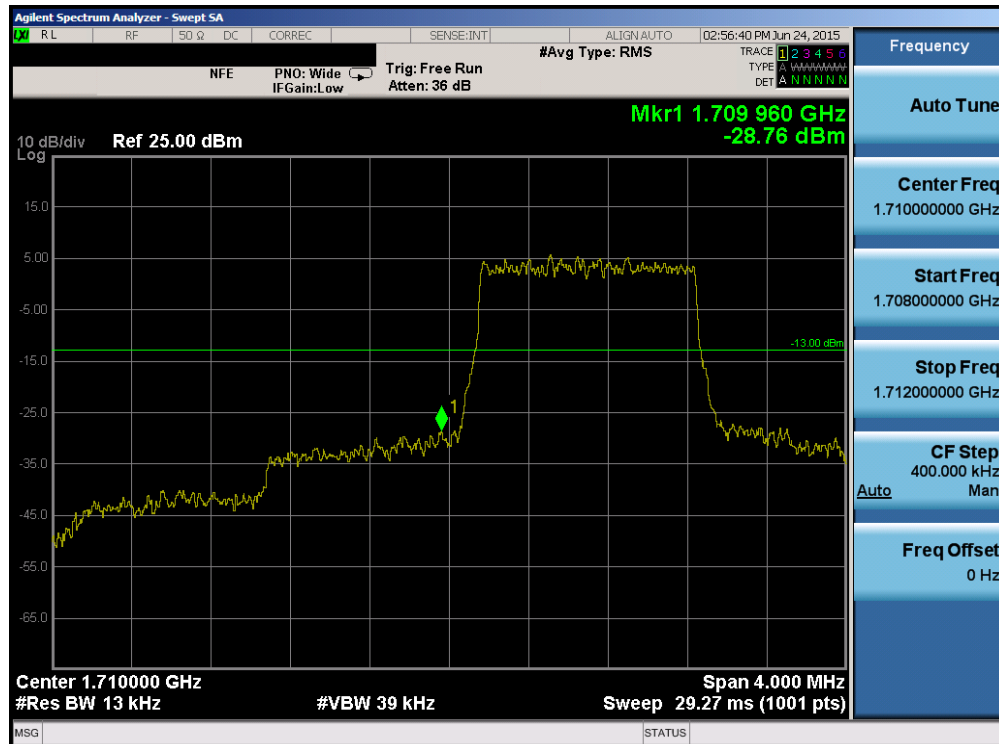

Plot 6-120. Lower Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 76 of 142

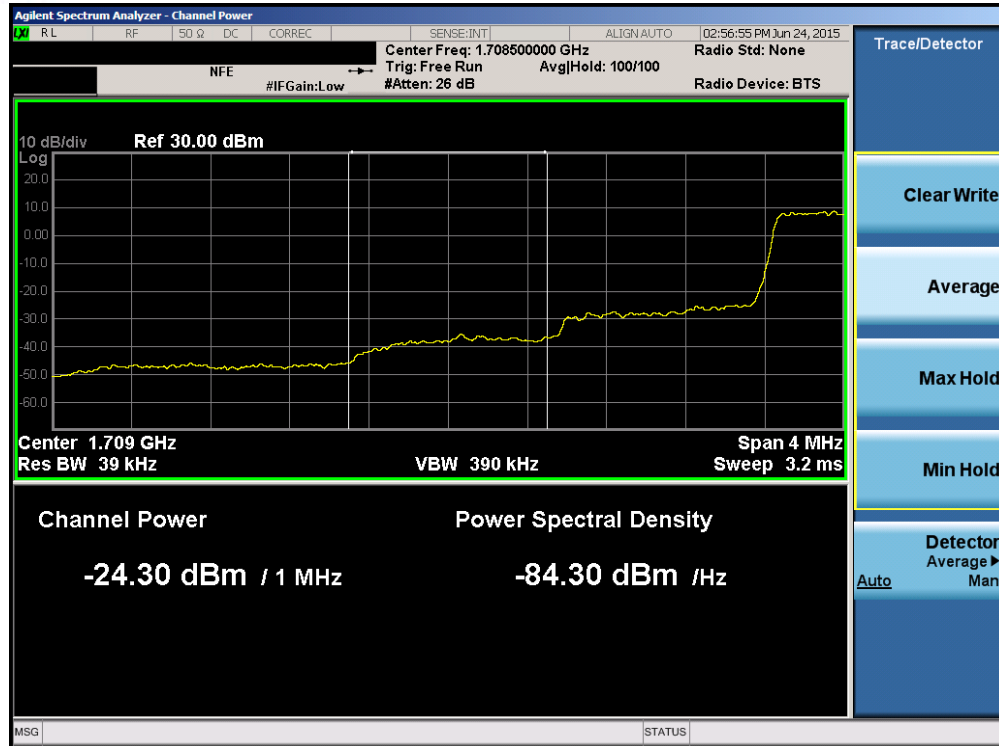


Plot 6-121. Lower Extended Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)




Plot 6-122. Upper Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 77 of 142

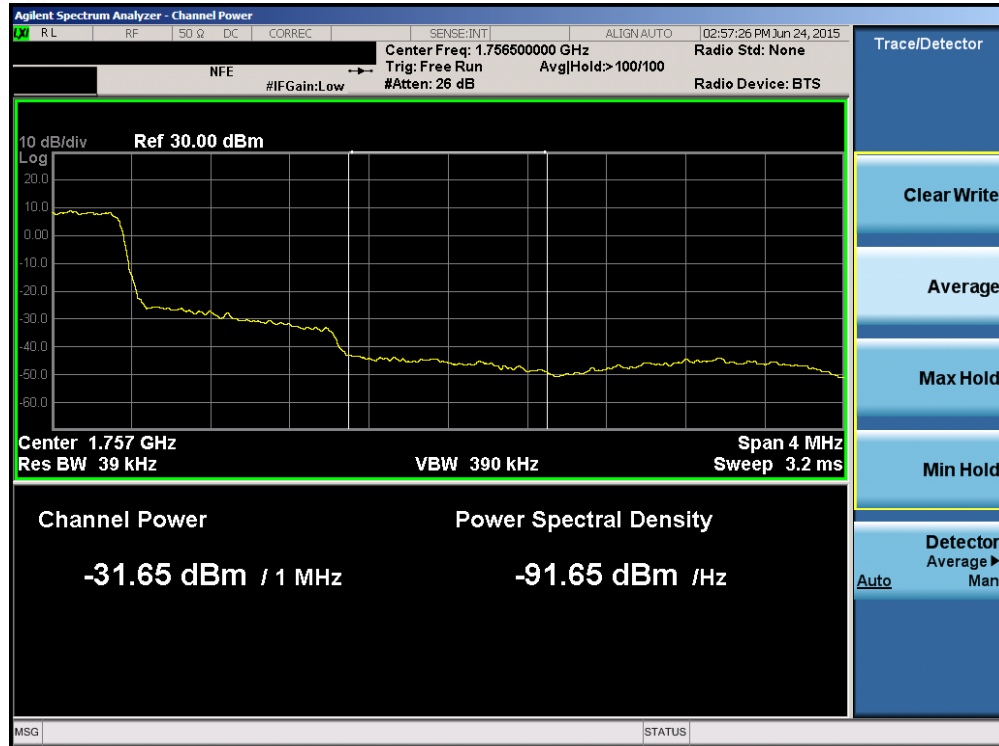


Plot 6-123. Upper Extended Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

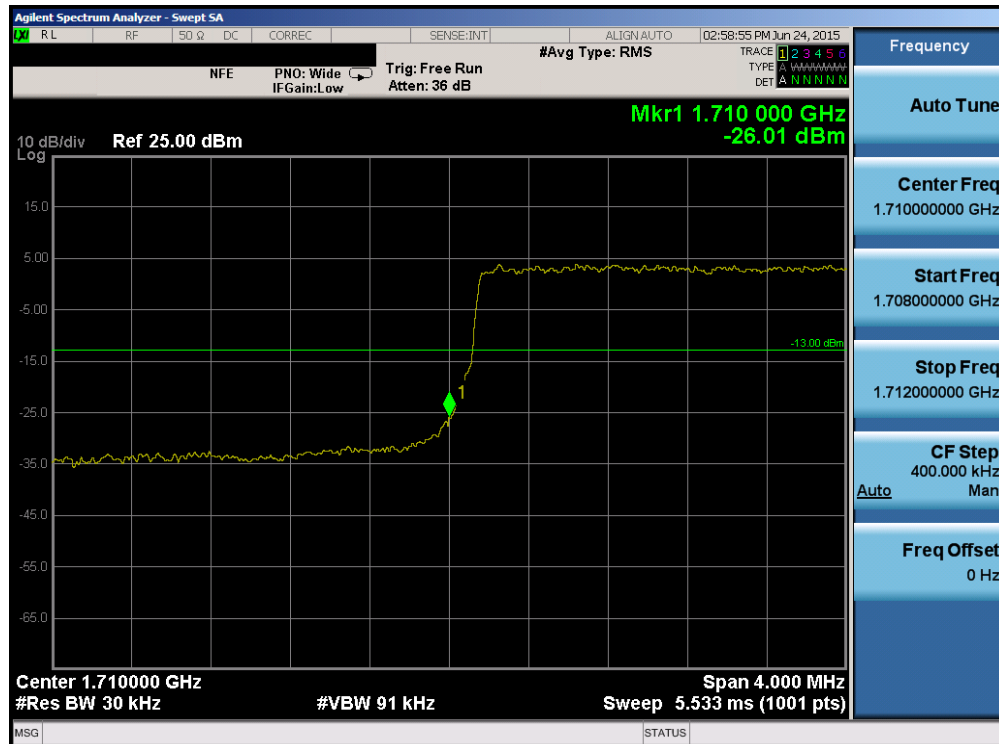


Plot 6-124. Lower Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 78 of 142

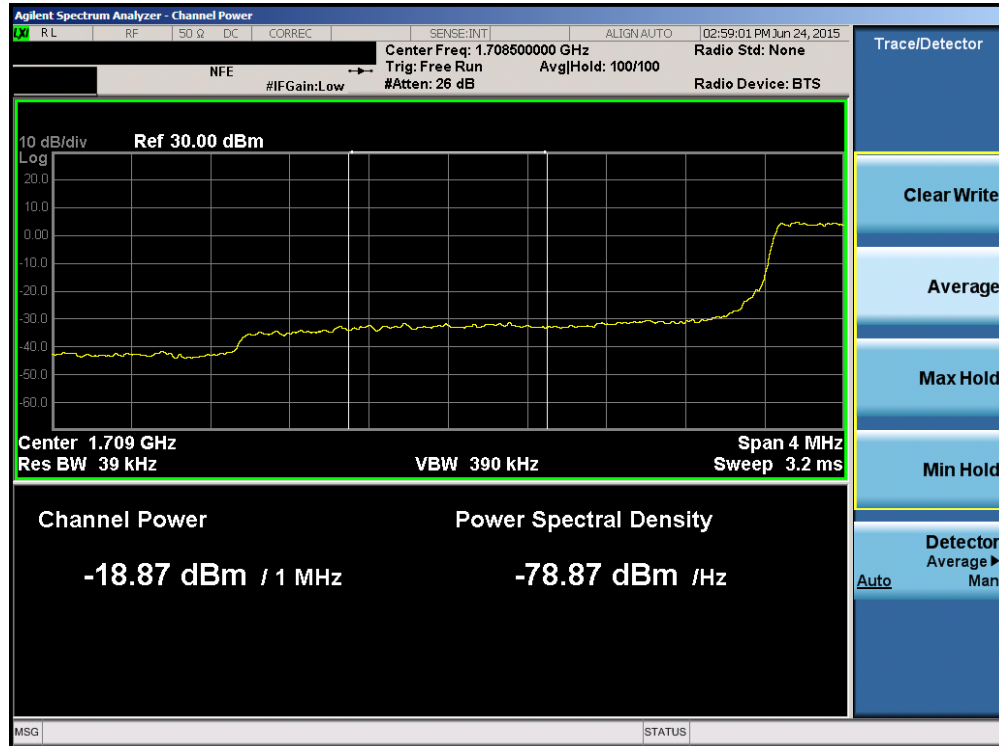


Plot 6-125. Lower Extended Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

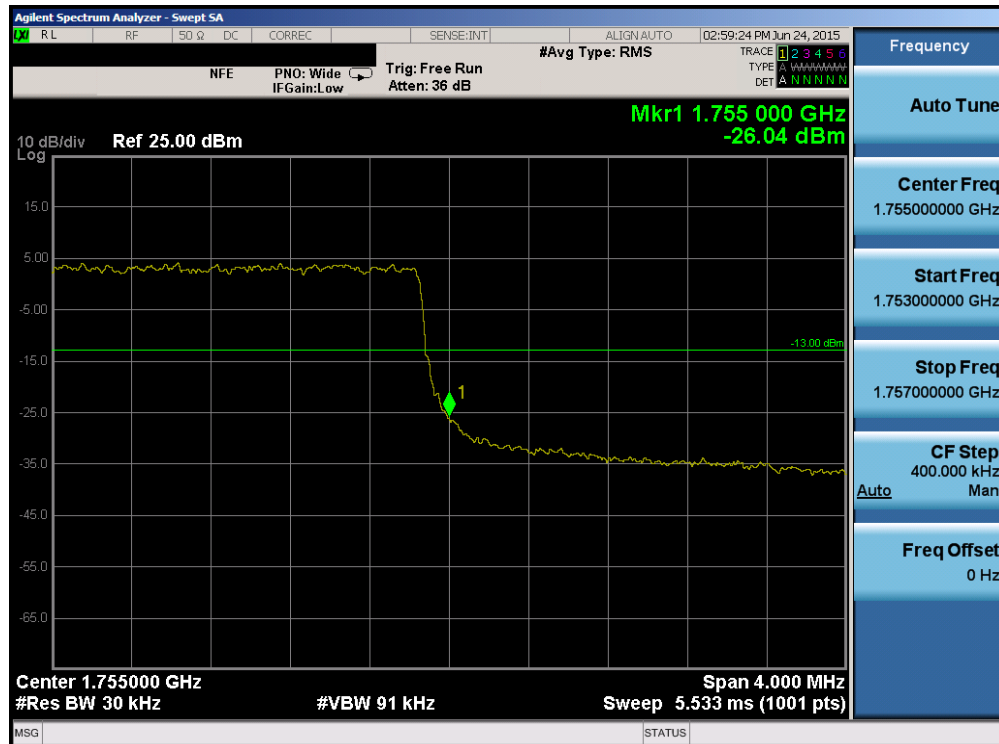


Plot 6-126. Upper Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 79 of 142

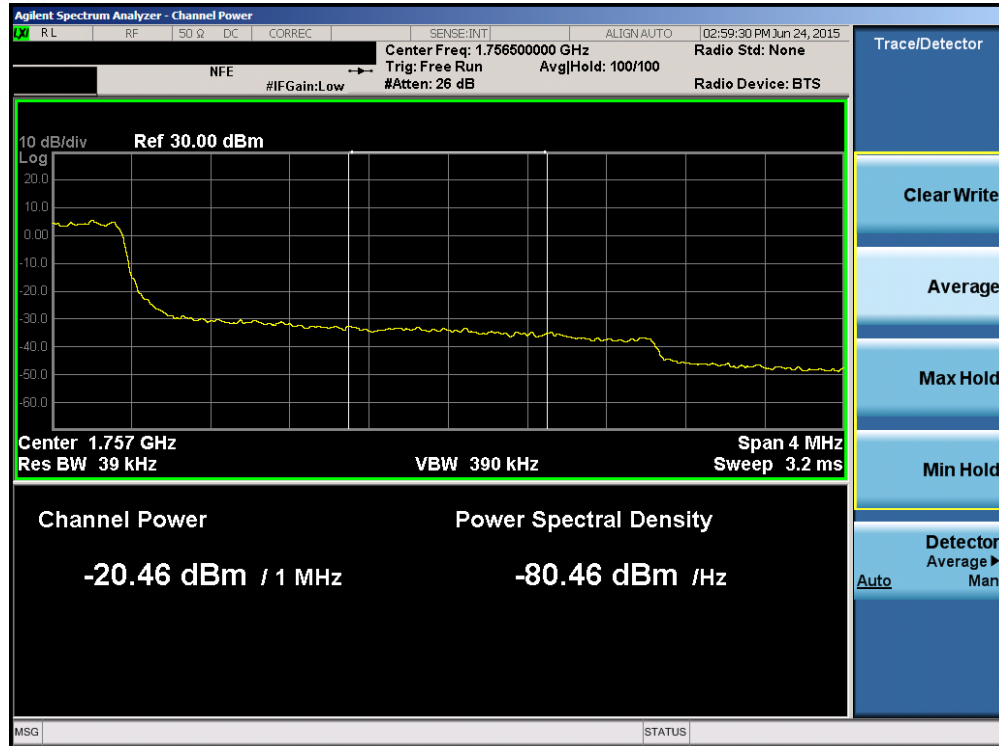


Plot 6-127. Upper Extended Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

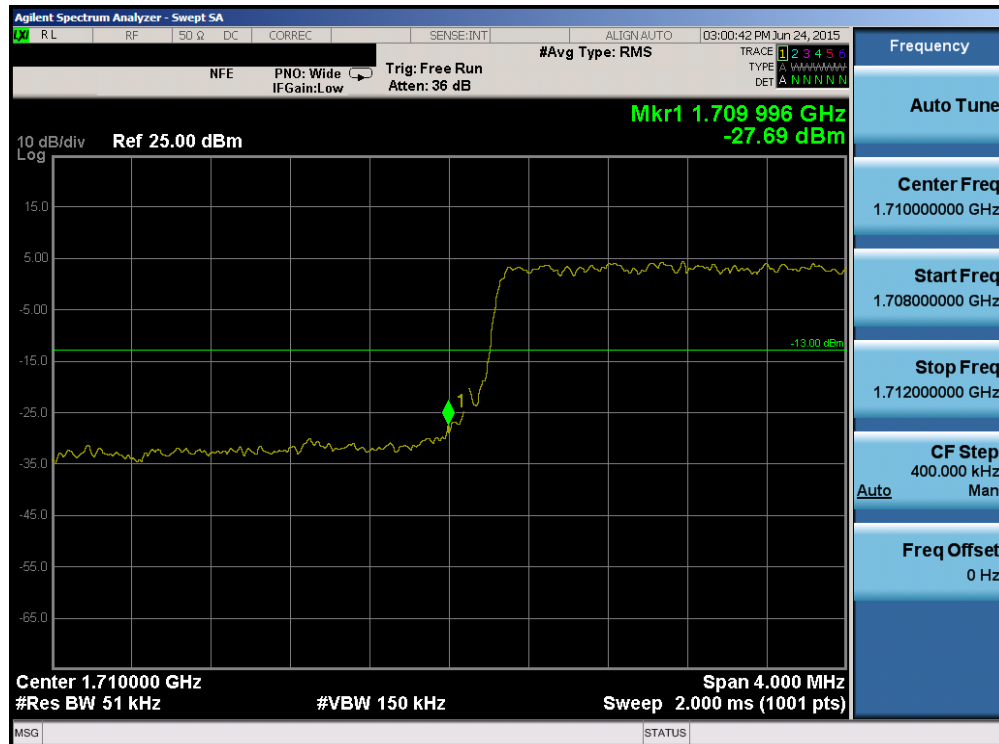


Plot 6-128. Lower Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 80 of 142

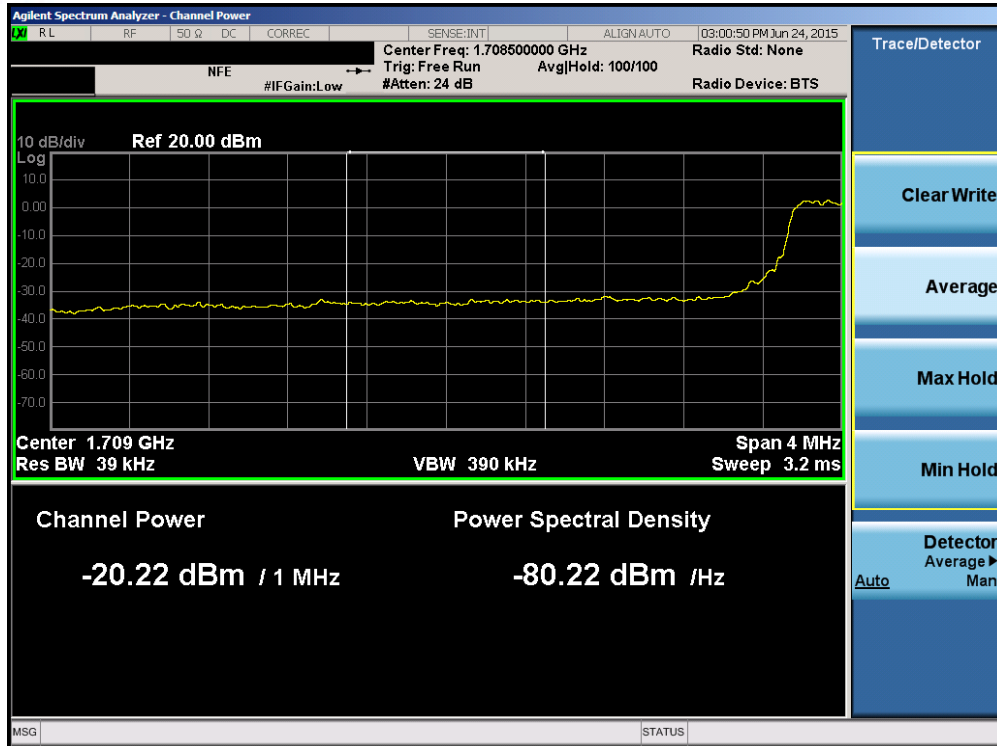


Plot 6-129. Lower Extended Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

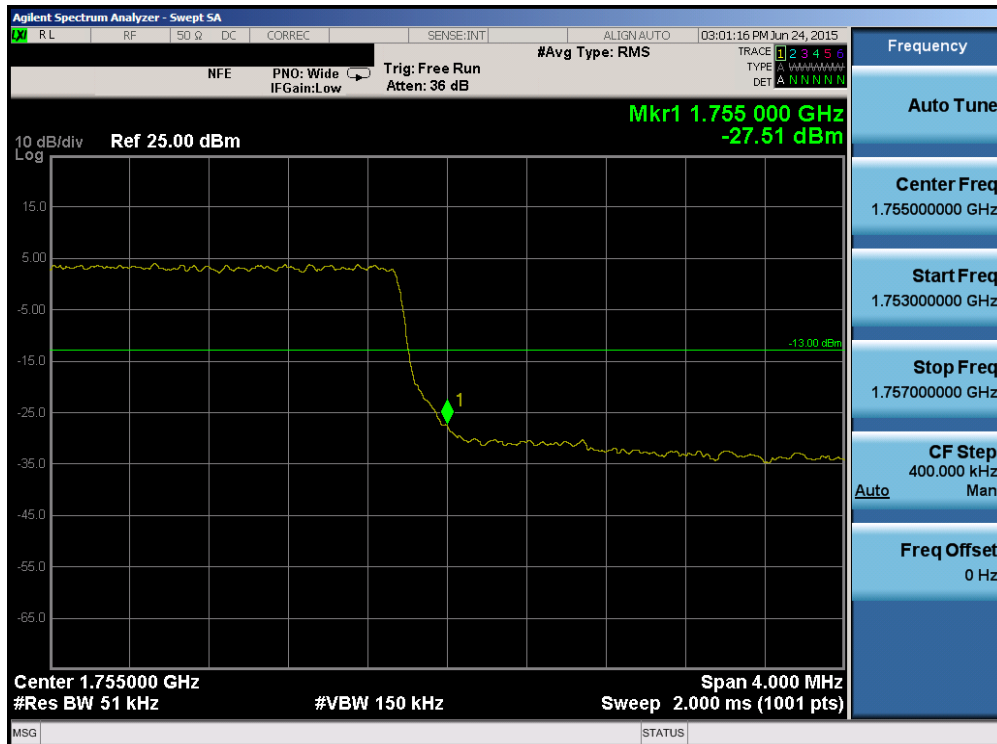


Plot 6-130. Upper Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 81 of 142

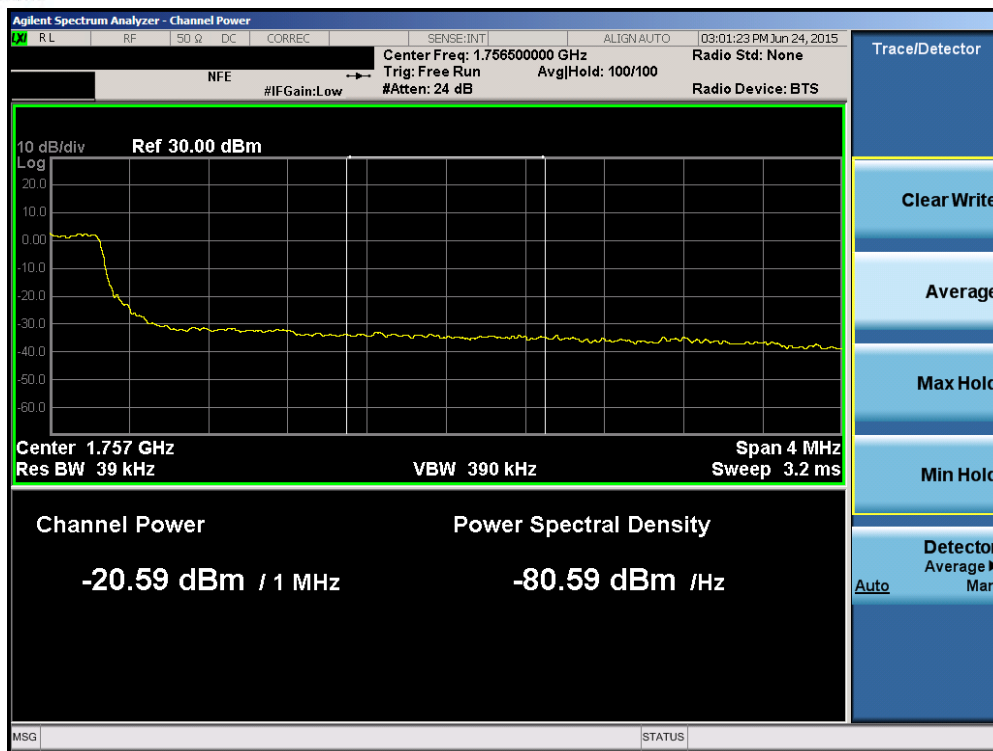


Plot 6-131. Upper Extended Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

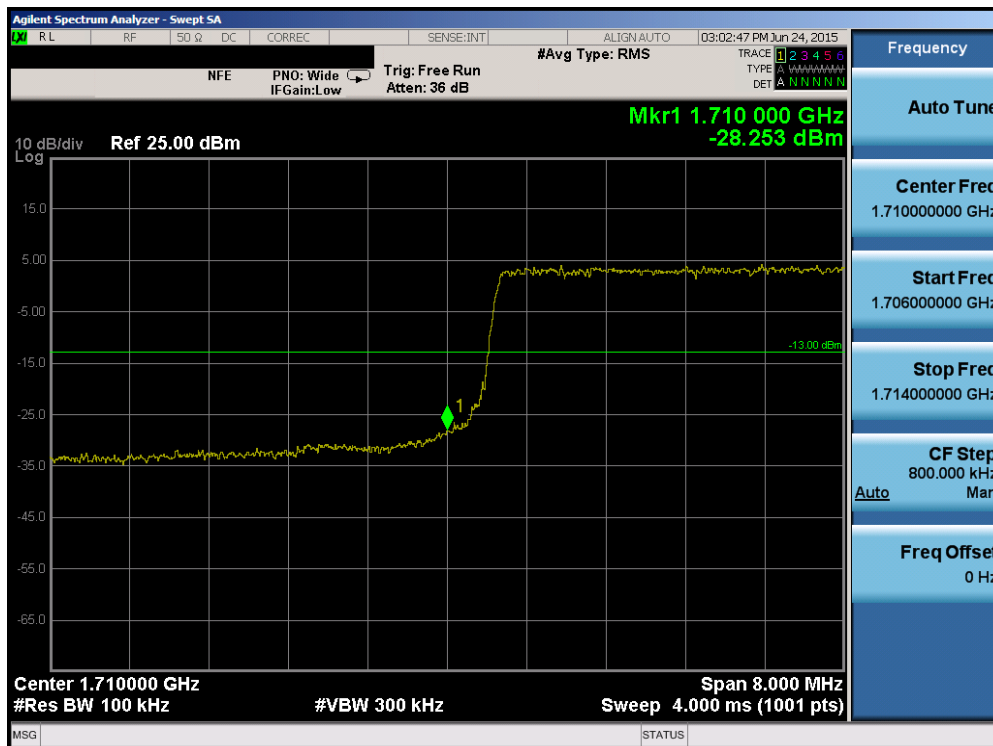


Plot 6-132. Lower Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 82 of 142

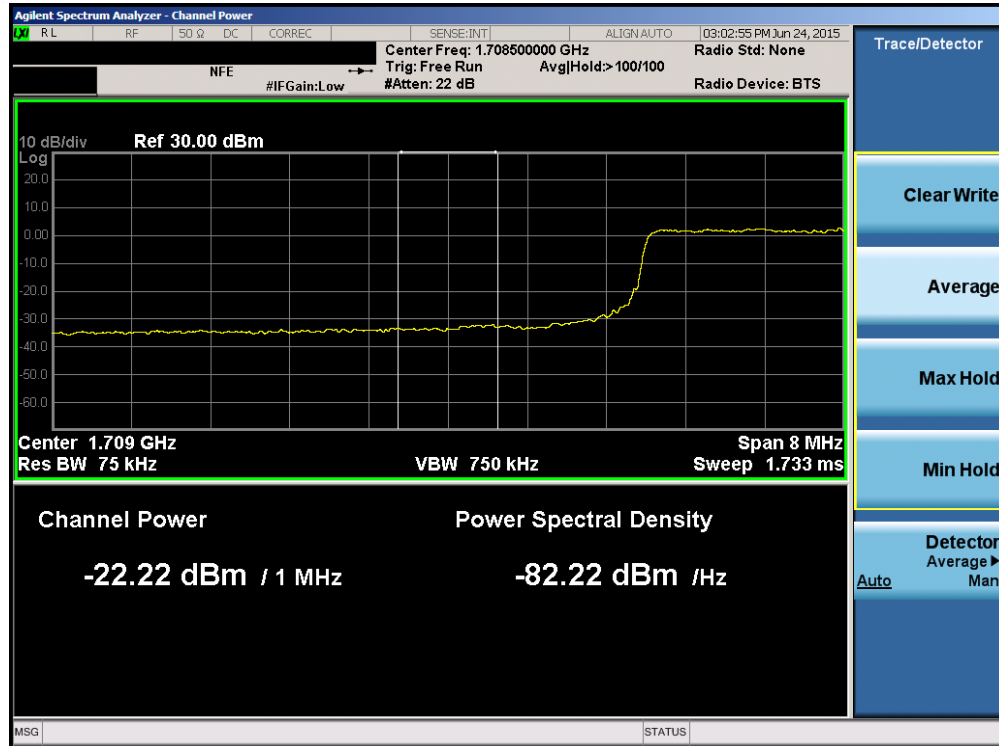


Plot 6-133. Lower Extended Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

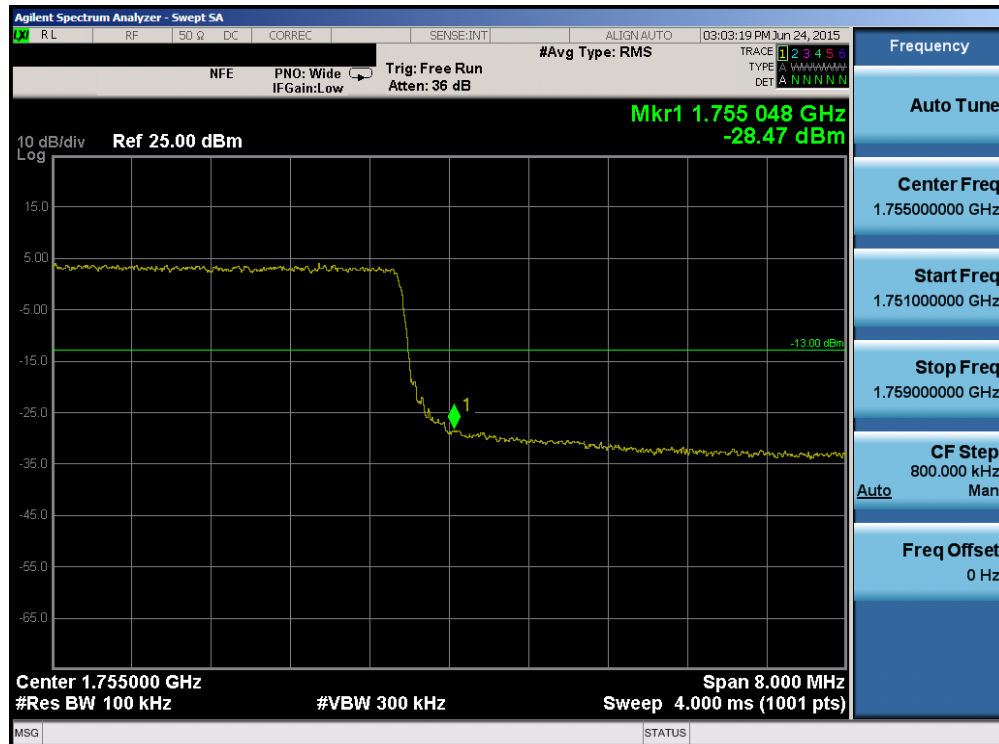


Plot 6-134. Upper Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 83 of 142

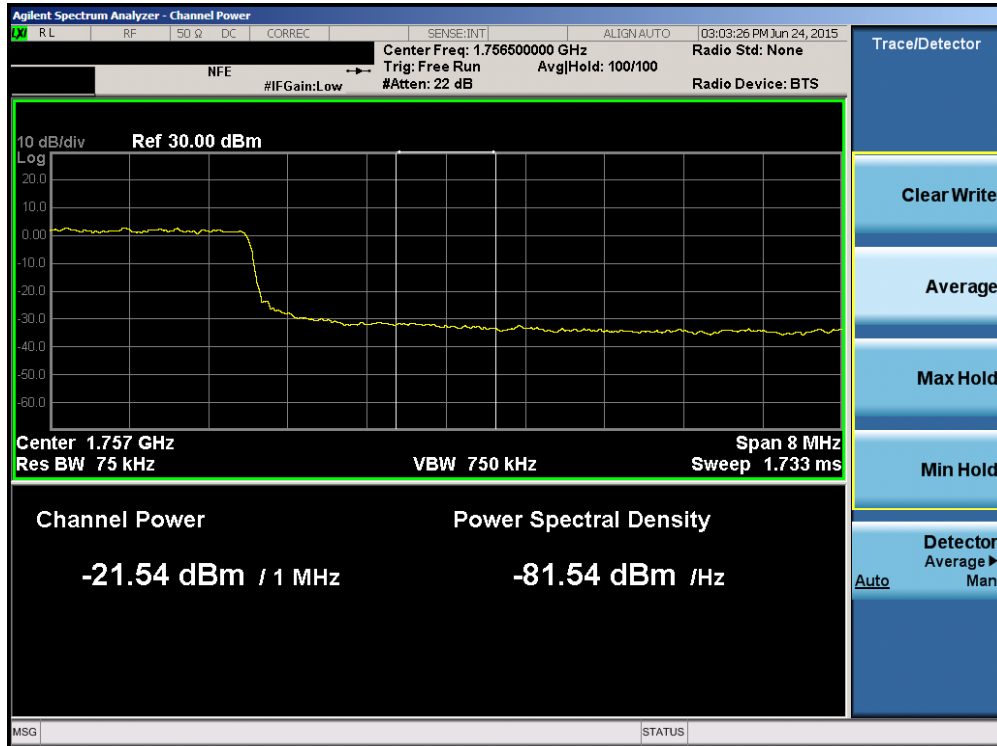


Plot 6-135. Upper Extended Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

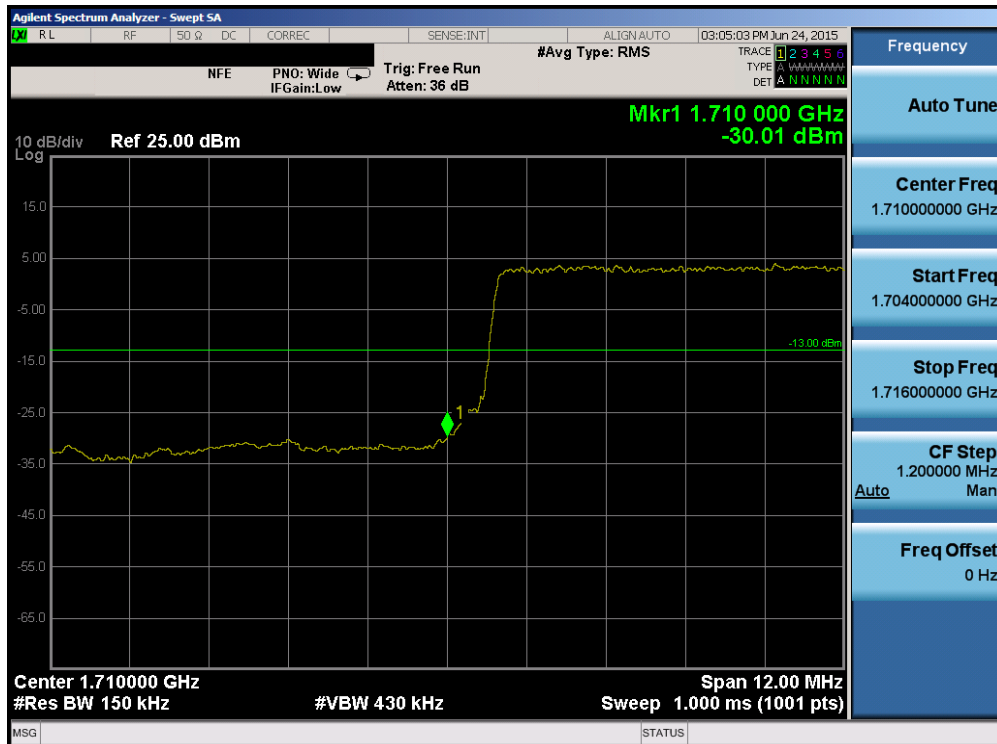


Plot 6-136. Lower Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 84 of 142

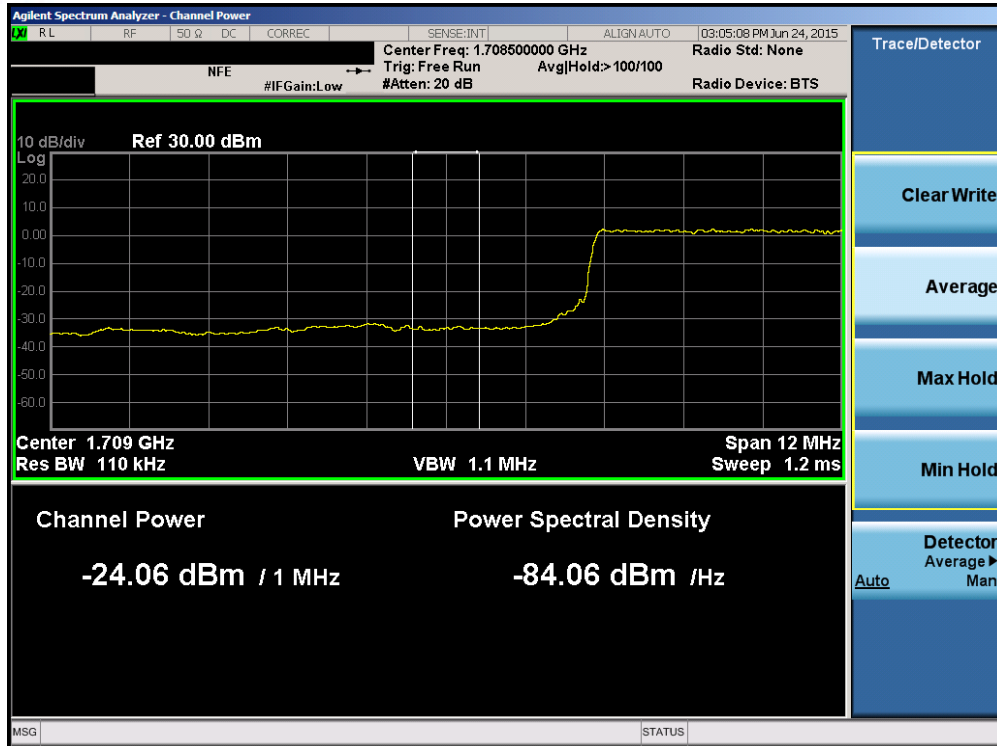


Plot 6-137. Lower Extended Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

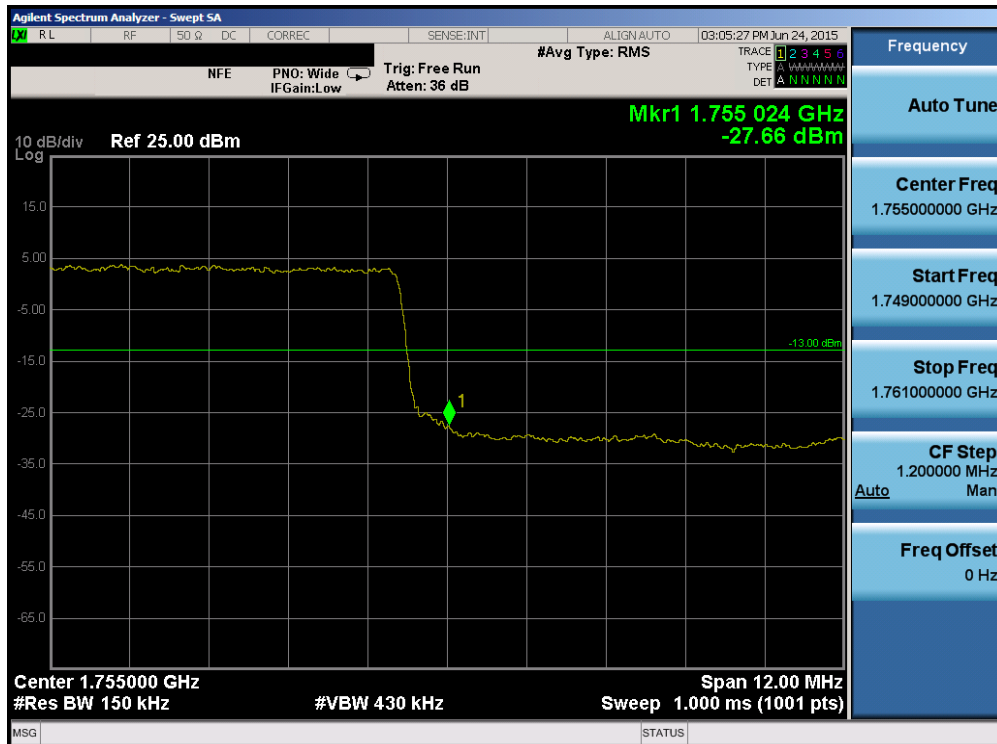


Plot 6-138. Upper Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 85 of 142

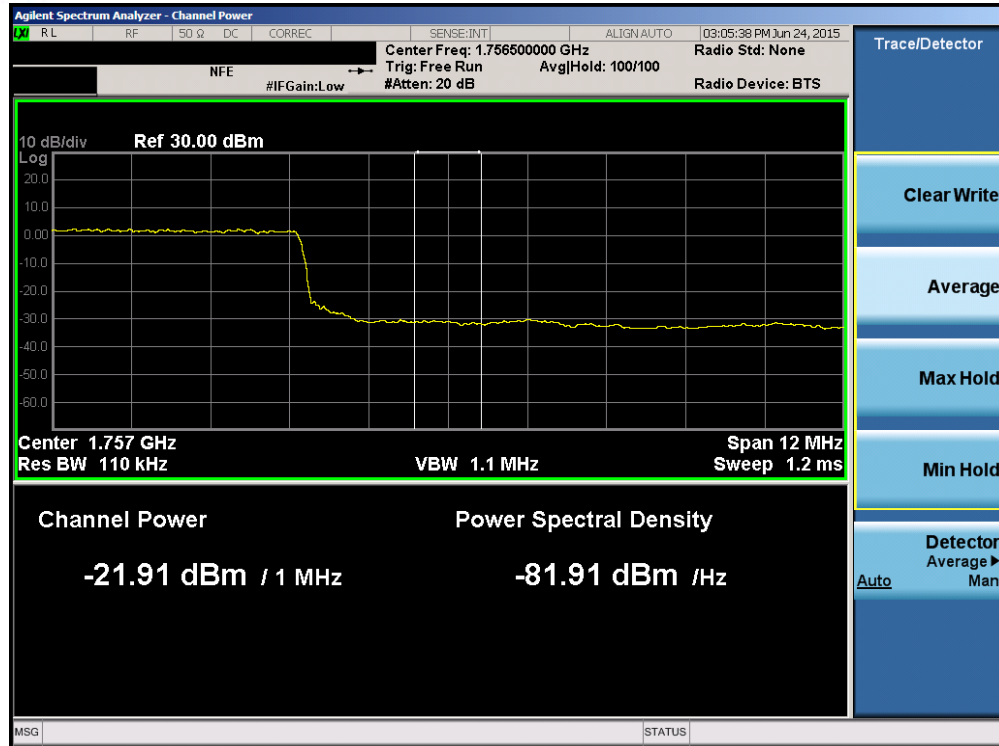


Plot 6-139. Upper Extended Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

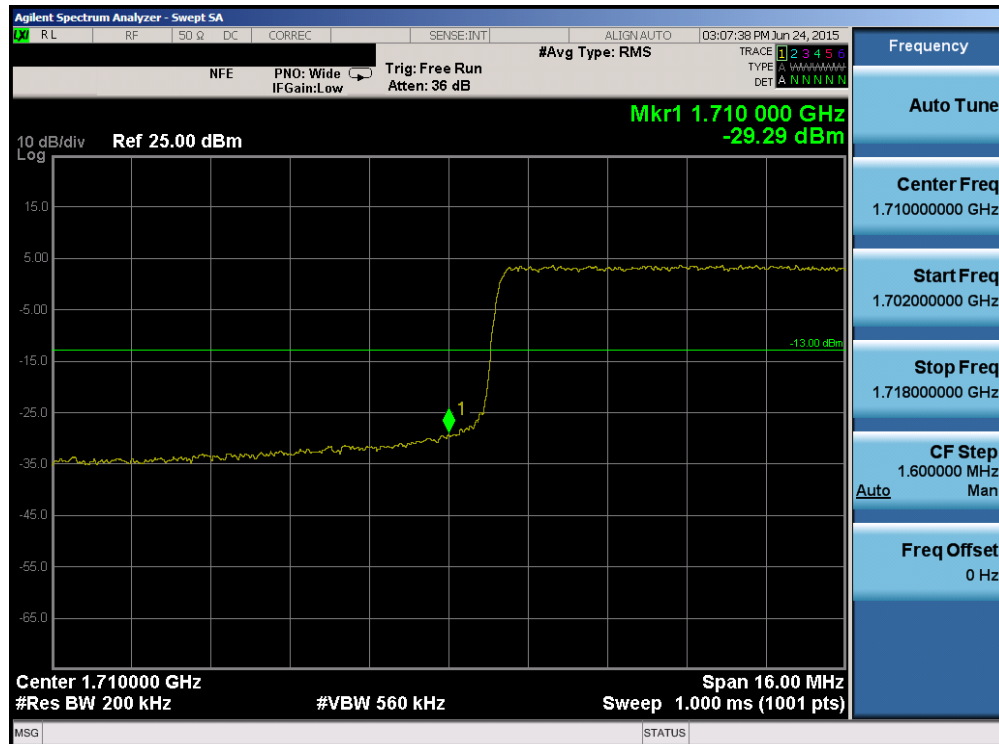


Plot 6-140. Lower Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 86 of 142

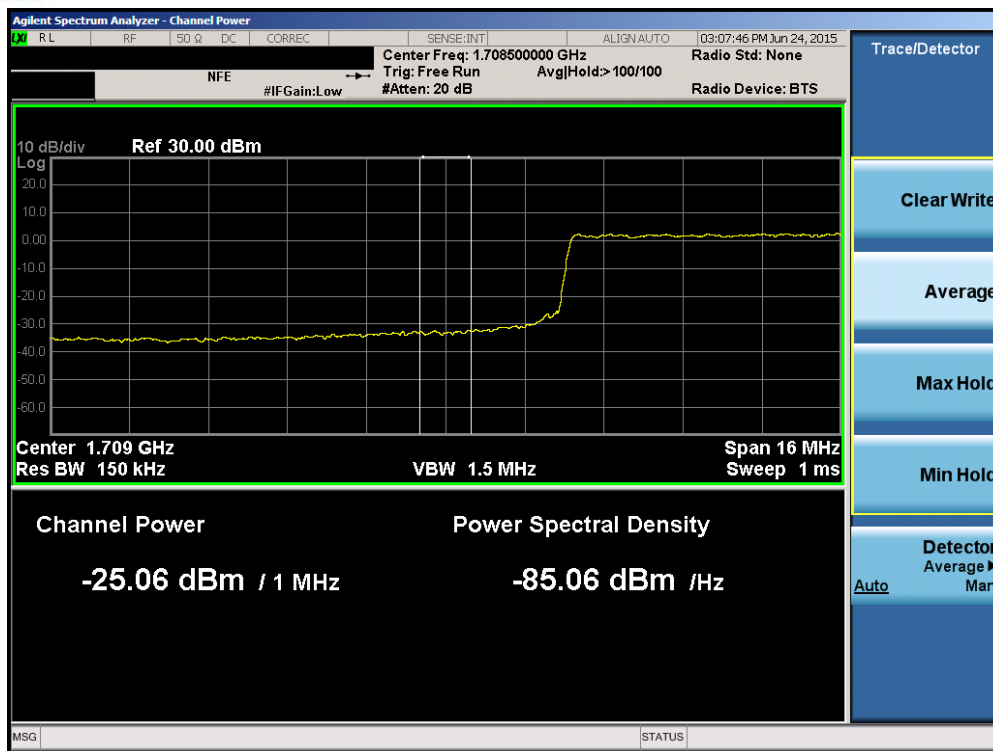


Plot 6-141. Lower Extended Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

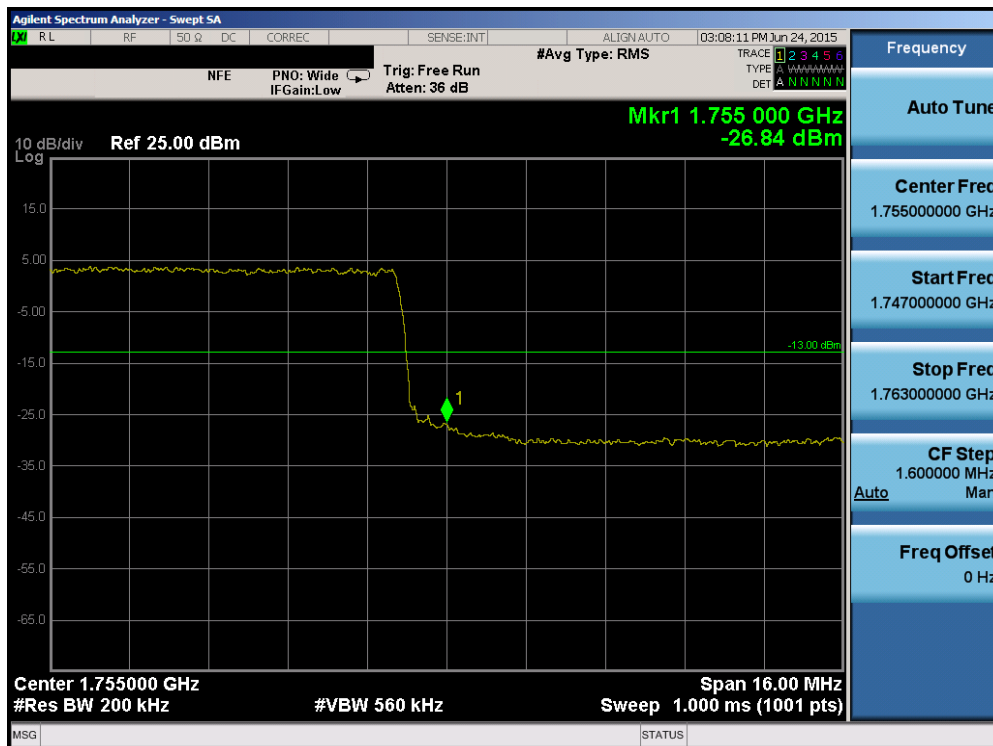


Plot 6-142. Upper Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 87 of 142

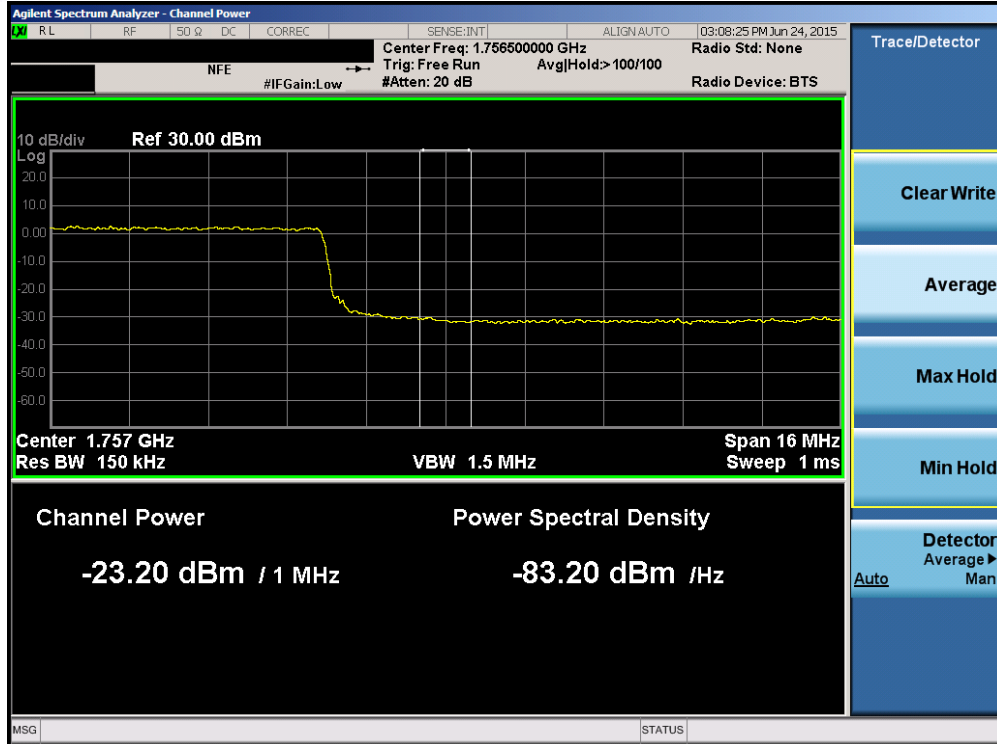


Plot 6-143. Upper Extended Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

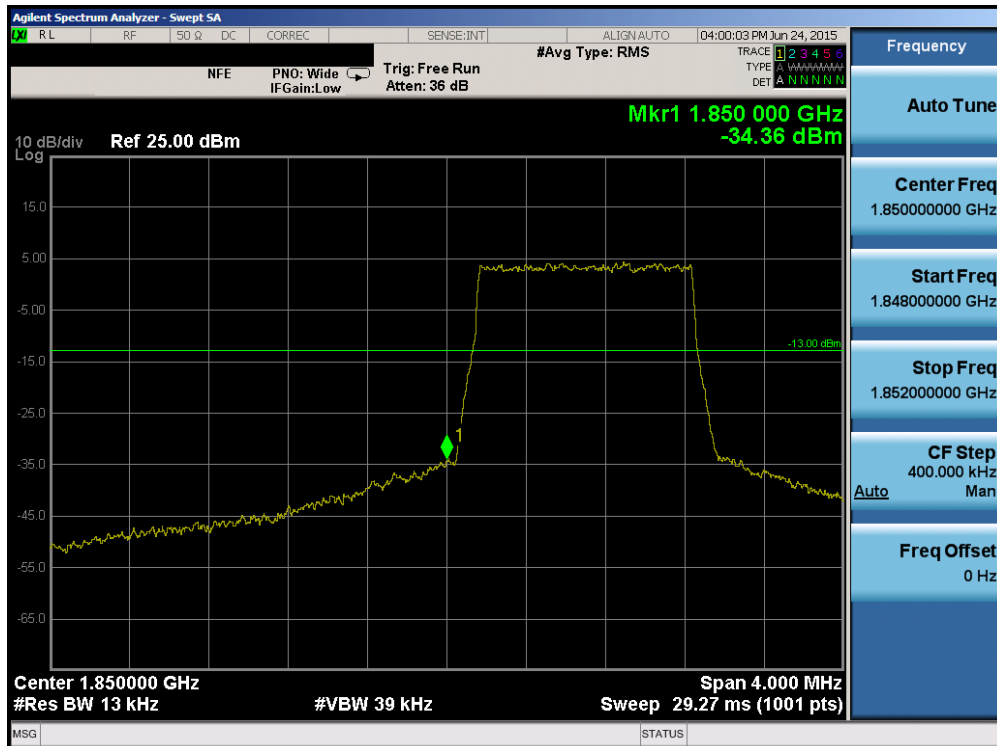

Plot 6-144. Lower Band Edge Plot (Band 25/2 – 1.4MHz QPSK – RB Size 6)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 88 of 142

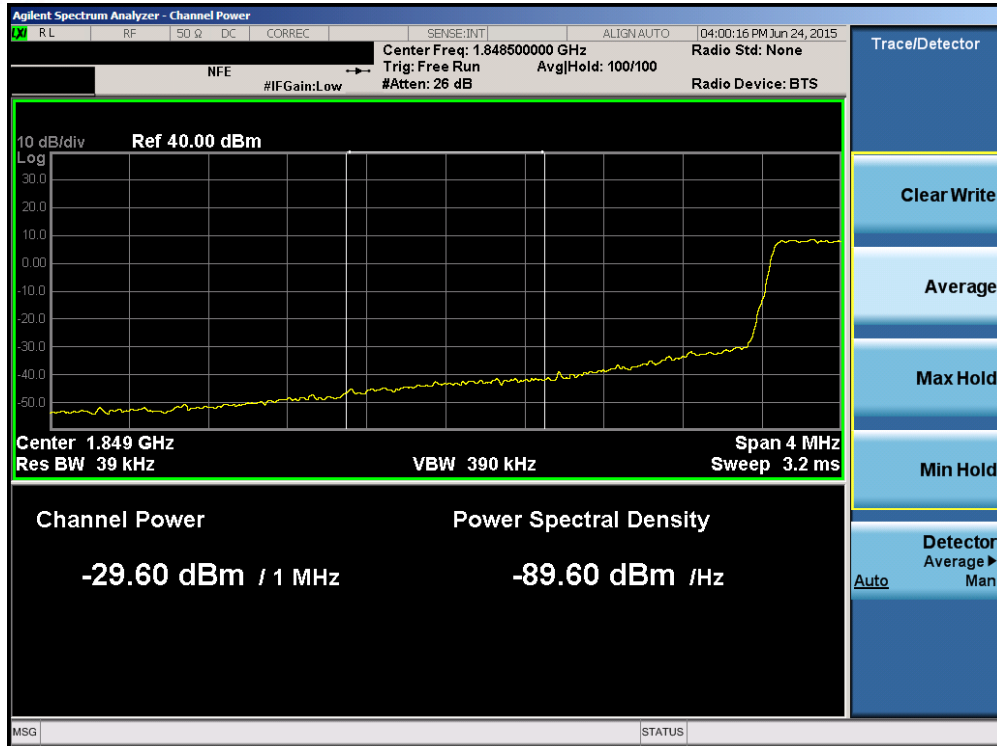


Plot 6-145. Lower Extended Band Edge Plot (Band 25/2 – 1.4MHz QPSK – RB Size 6)




Plot 6-146. Upper Band Edge Plot (Band 25/2 – 1.4MHz QPSK – RB Size 6)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 89 of 142

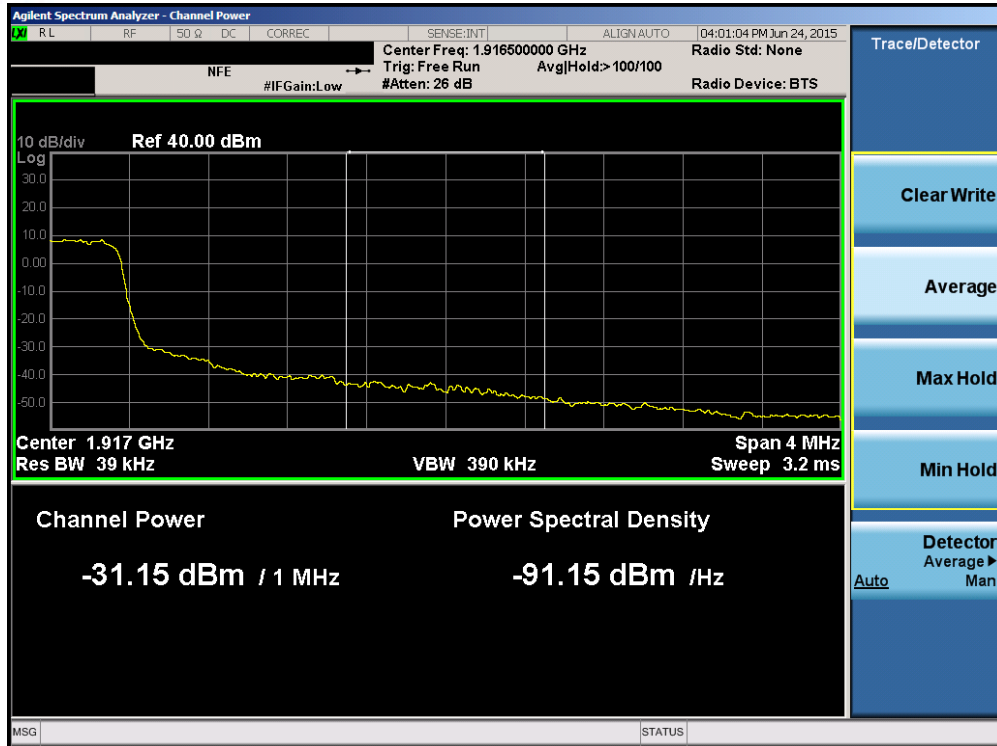


Plot 6-147. Upper Extended Band Edge Plot (Band 25/2 – 1.4MHz QPSK – RB Size 6)

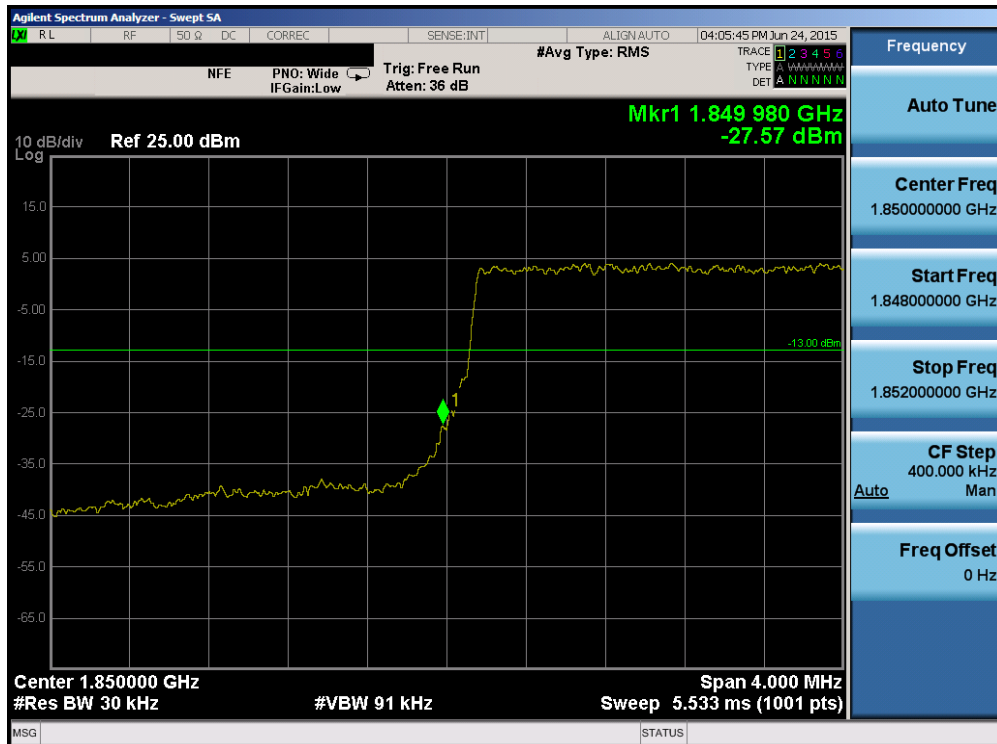


Plot 6-148. Lower Band Edge Plot (Band 25/2 – 3.0MHz QPSK – RB Size 15)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 90 of 142

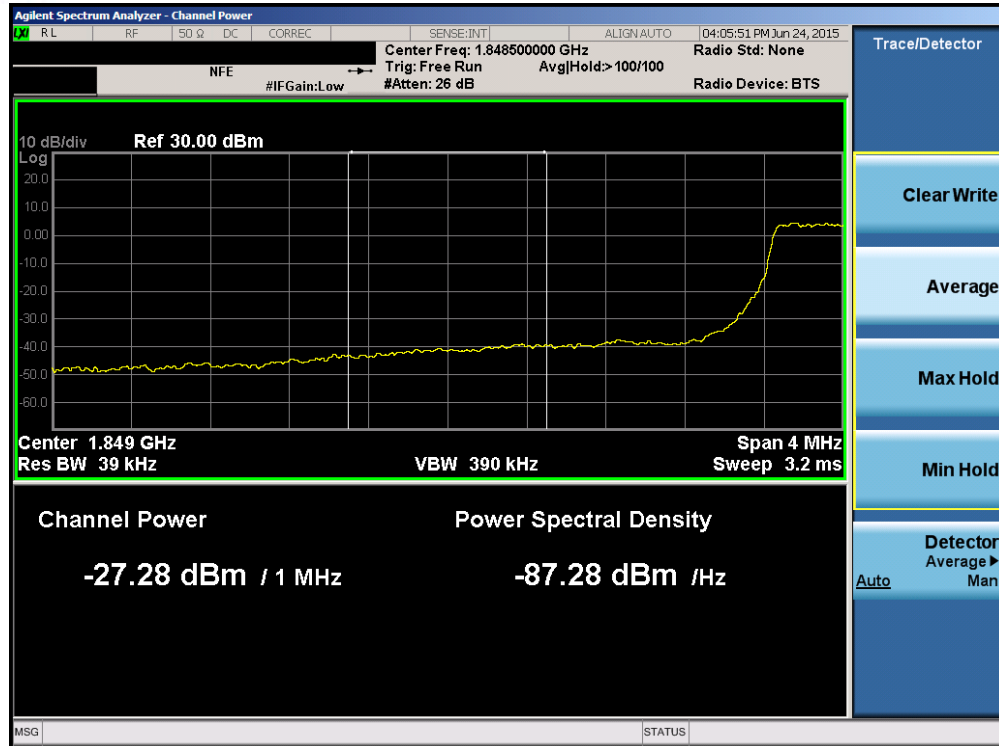


Plot 6-149. Lower Extended Band Edge Plot (Band 25/2 – 3.0MHz QPSK – RB Size 15)

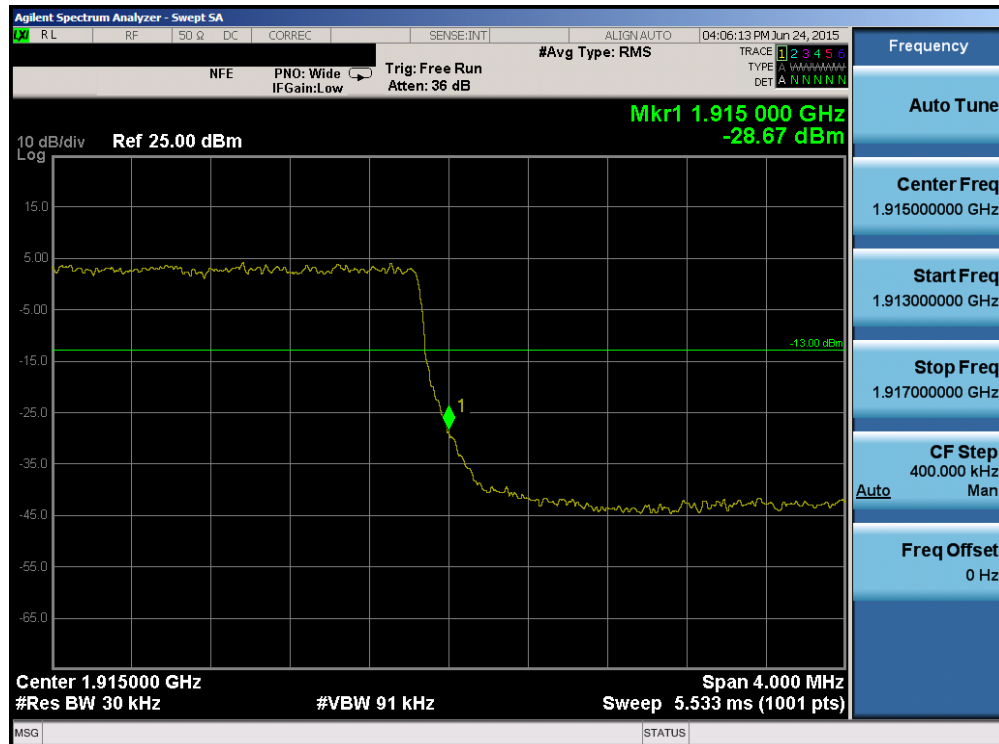


Plot 6-150. Upper Band Edge Plot (Band 25/2 – 3.0MHz QPSK – RB Size 15)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 91 of 142

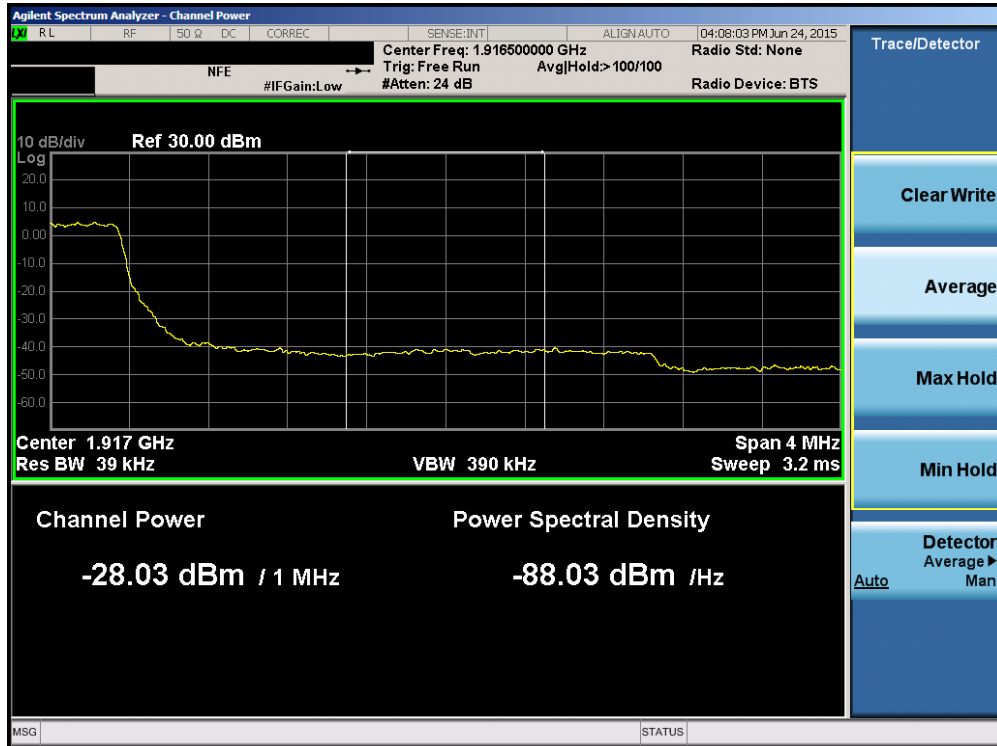


Plot 6-151. Upper Extended Band Edge Plot (Band 25/2 – 3.0MHz QPSK – RB Size 15)

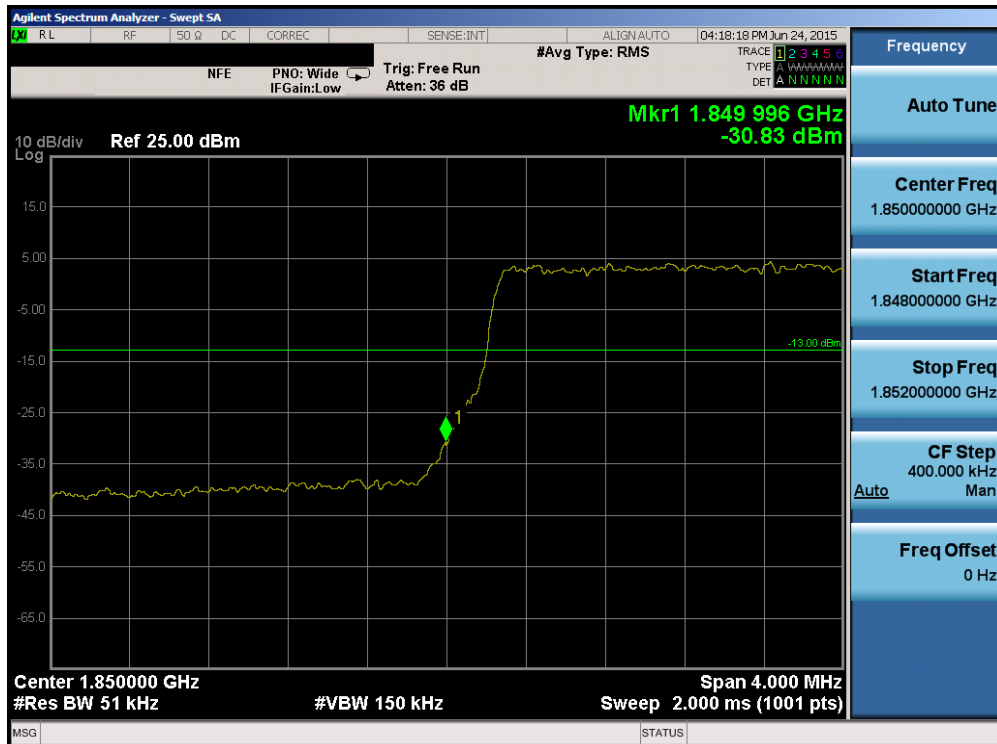


Plot 6-152. Lower Band Edge Plot (Band 25/2 – 5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 92 of 142

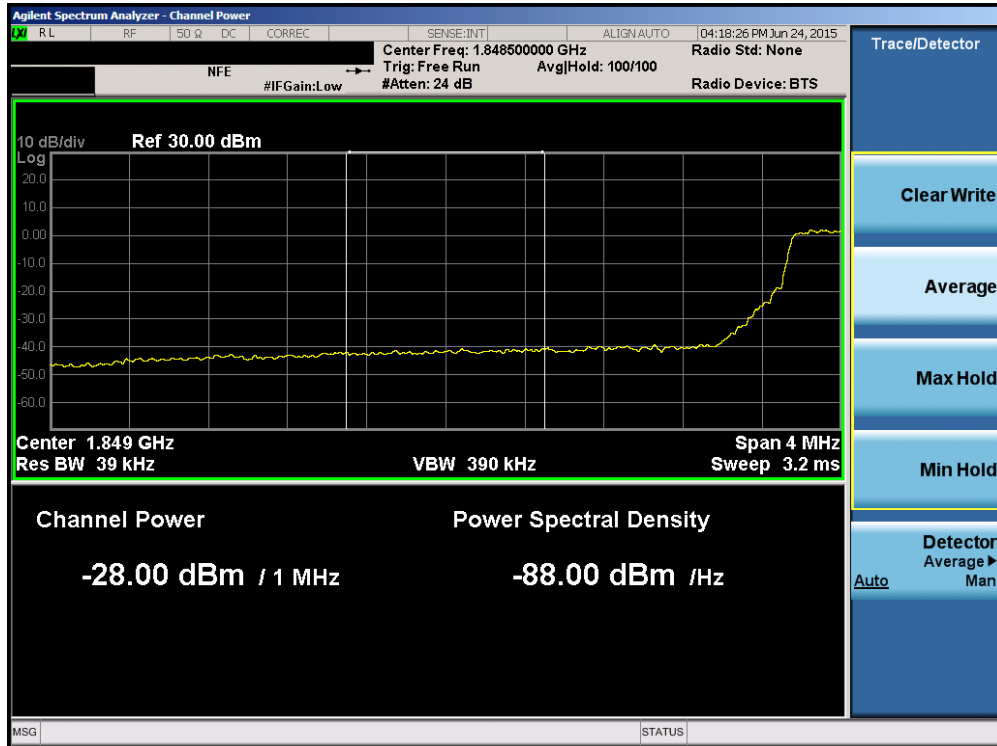


Plot 6-153. Lower Extended Band Edge Plot (Band 25/2 – 5.0MHz QPSK – RB Size 25)

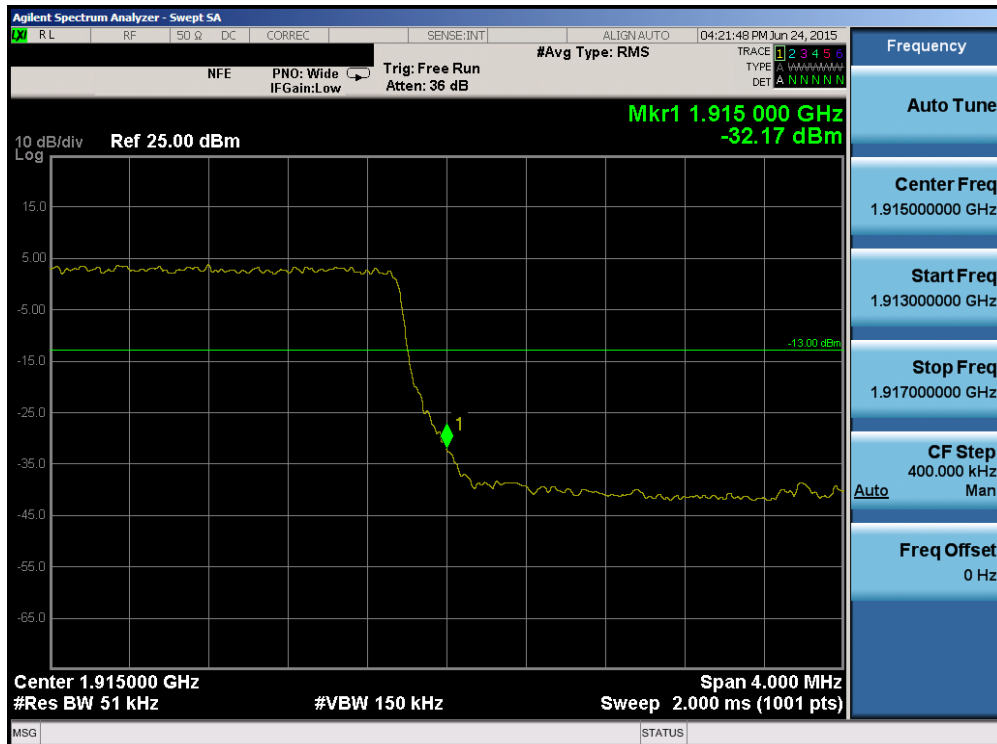


Plot 6-154. Upper Band Edge Plot (Band 25/2 – 5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 93 of 142

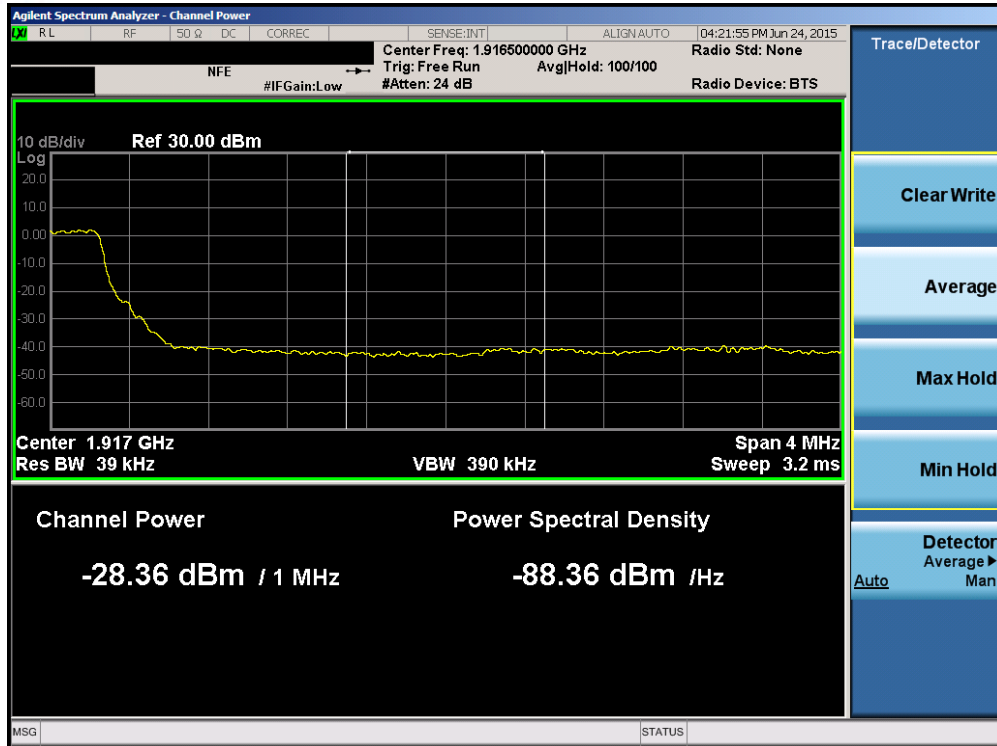


Plot 6-155. Upper Extended Band Edge Plot (Band 25/2 – 5.0MHz QPSK – RB Size 25)

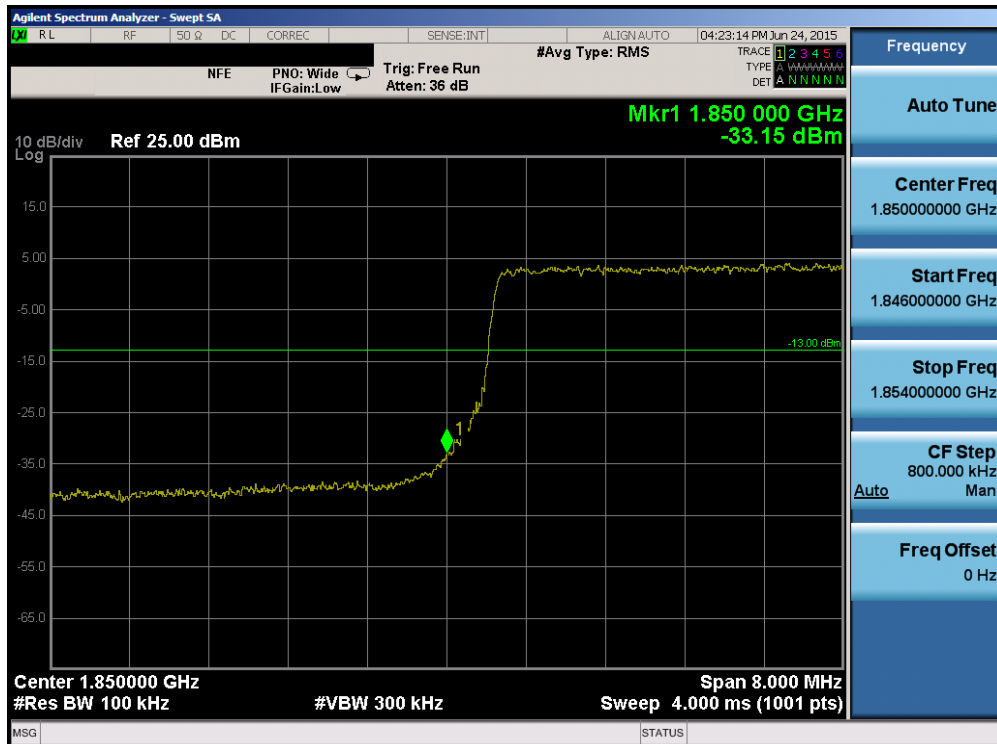


Plot 6-156. Lower Band Edge Plot (Band 25/2 – 10.0MHz QPSK – RB Size 50)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 94 of 142

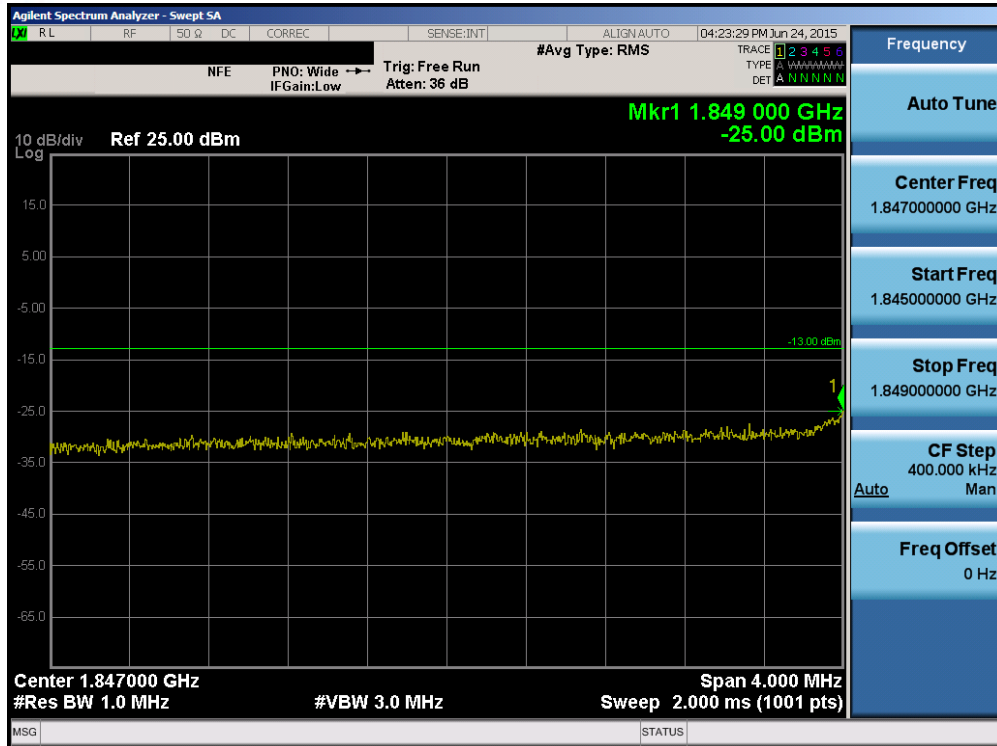


Plot 6-157. Lower Extended Band Edge Plot (Band 25/2 – 10.0MHz QPSK – RB Size 50)

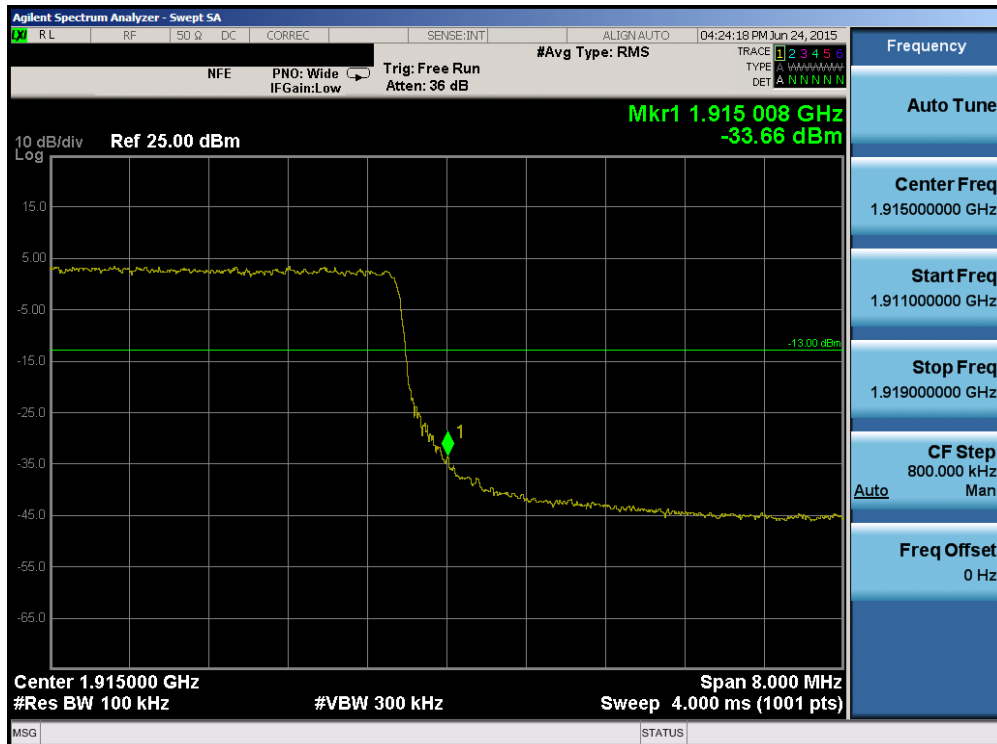


Plot 6-158. Upper Band Edge Plot (Band 25/2 – 10.0MHz QPSK – RB Size 50)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 95 of 142

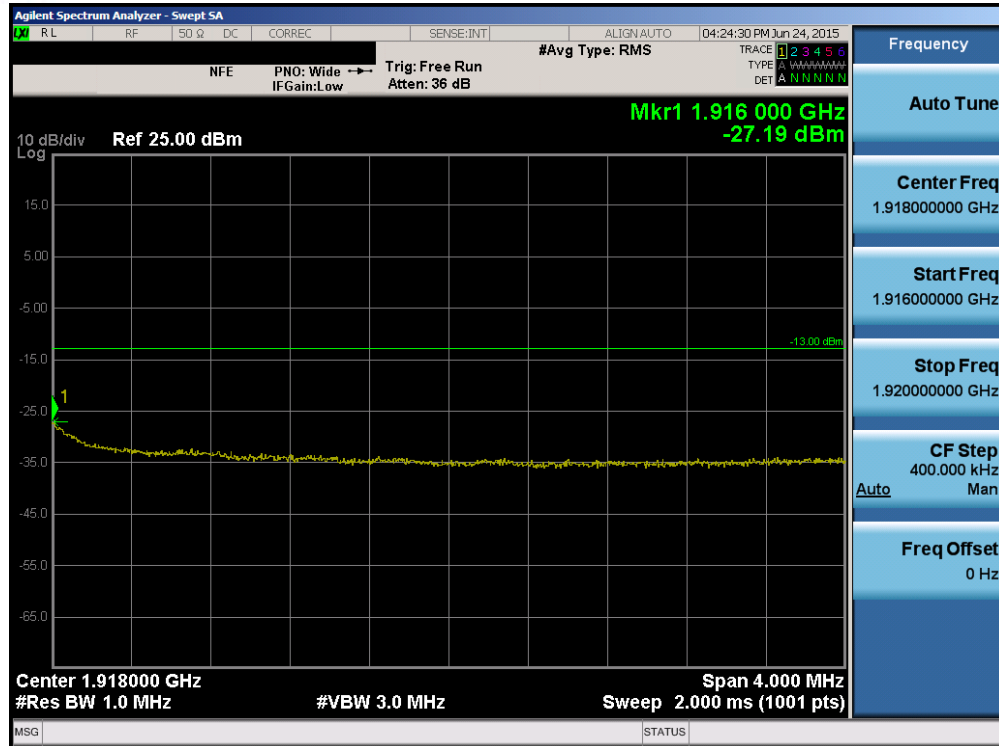


Plot 6-159. Upper Extended Band Edge Plot (Band 25/2 – 10.0MHz QPSK – RB Size 50)

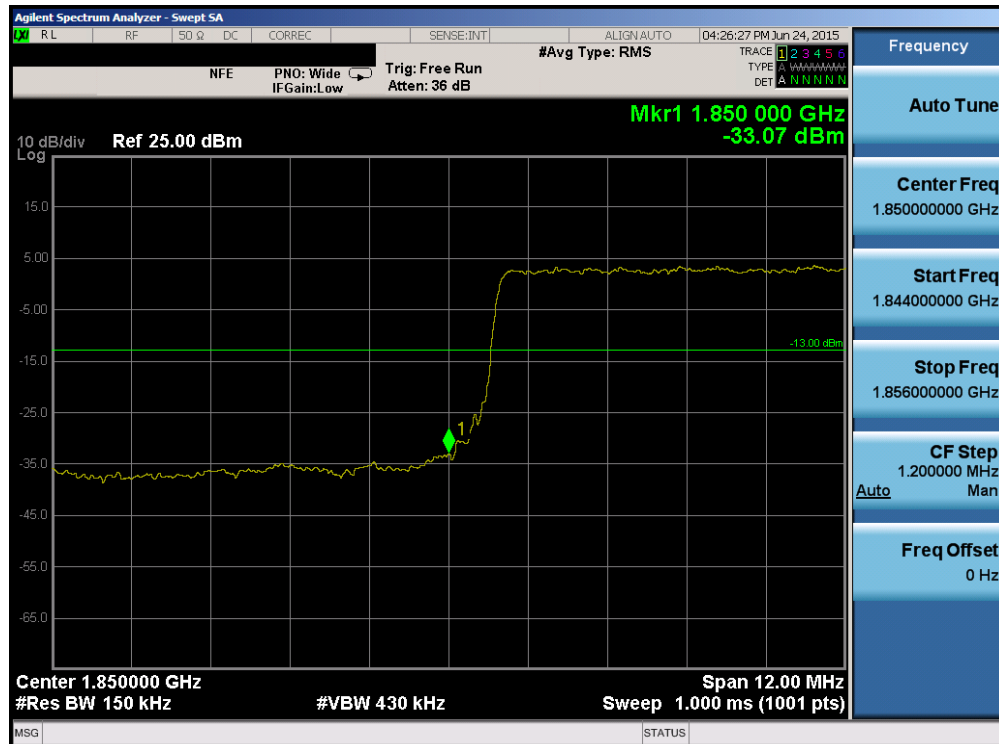


Plot 6-160. Lower Band Edge Plot (Band 25/2 – 15.0MHz QPSK – RB Size 75)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 96 of 142

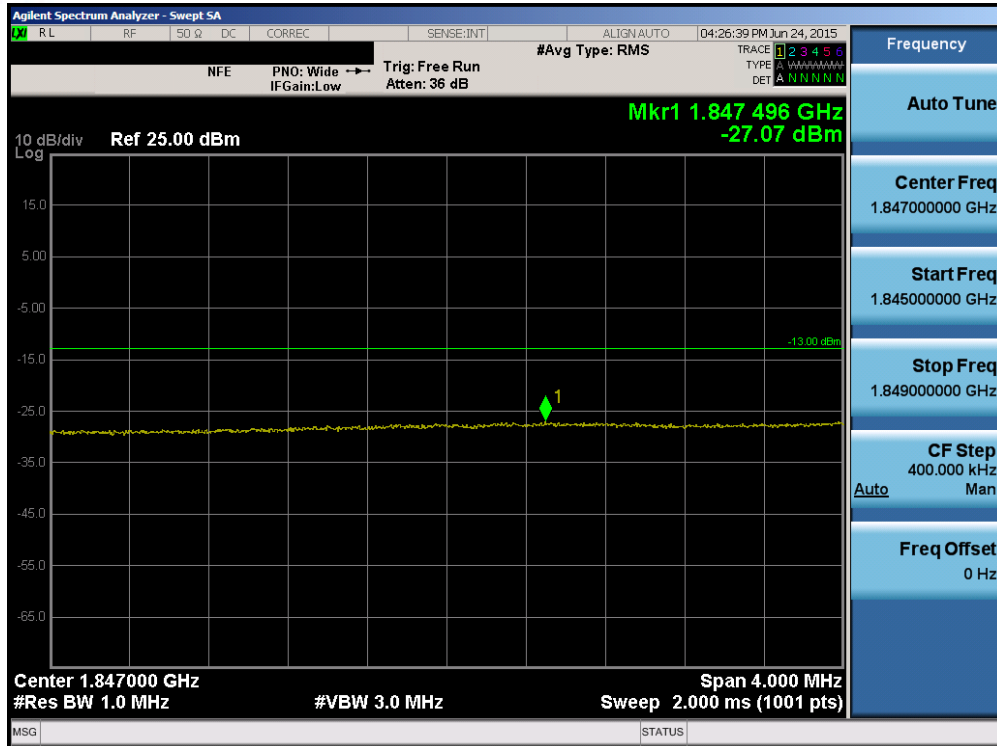

Plot 6-161. Lower Extended Band Edge Plot (Band 25/2 – 15.0MHz QPSK – RB Size 75)

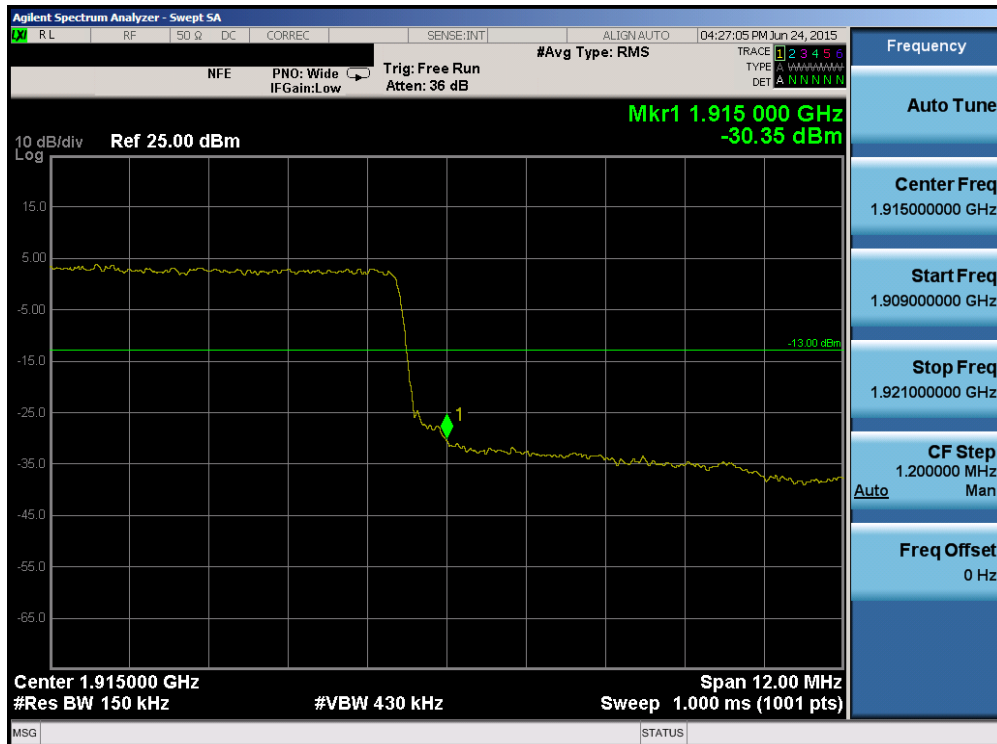


Plot 6-162. Upper Band Edge Plot (Band 25/2 – 15.0MHz QPSK – RB Size 75)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 97 of 142




Plot 6-163. Upper Extended Band Edge Plot (Band 25/2 – 15.0MHz QPSK – RB Size 75)

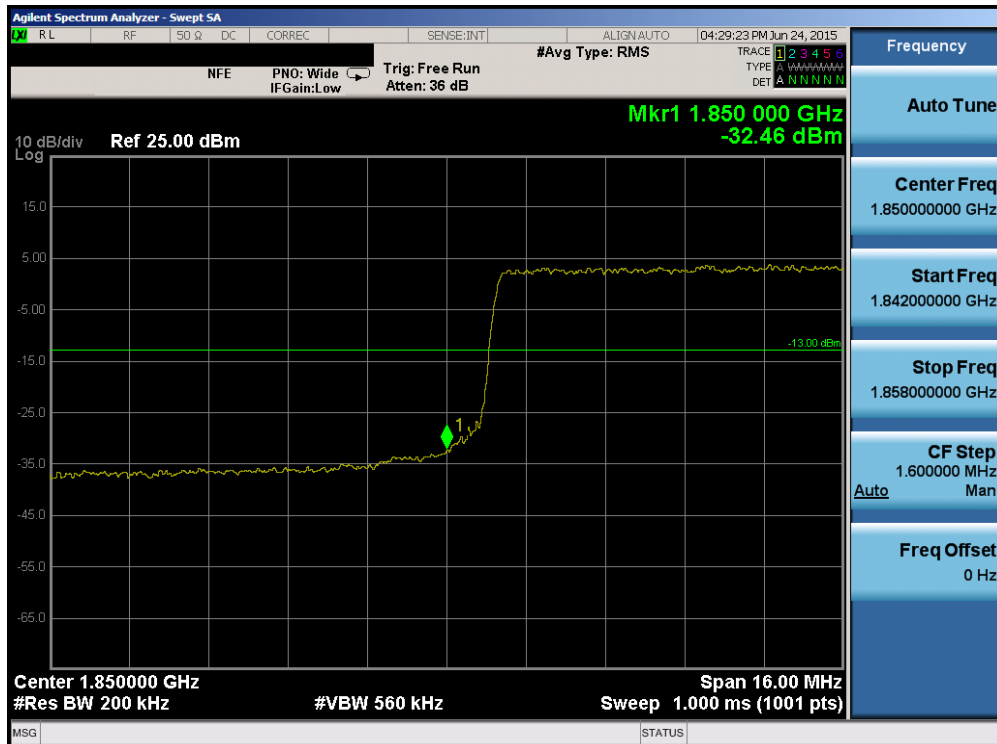


Plot 6-164. Lower Band Edge Plot (Band 25/2 – 20.0MHz QPSK – RB Size 100)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 98 of 142

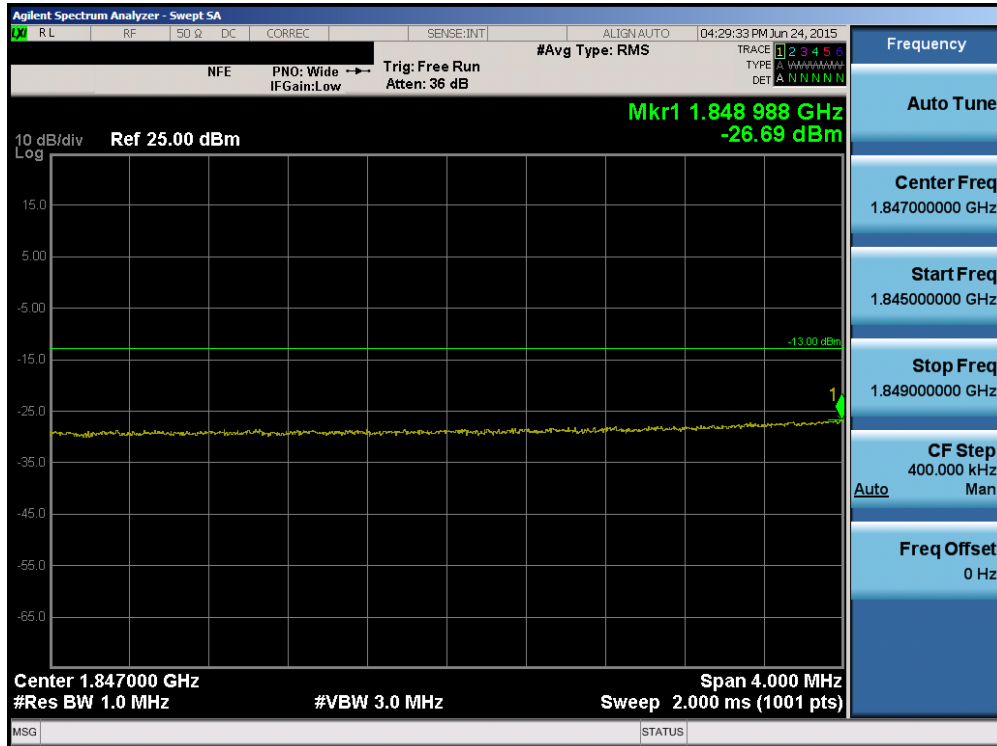


Plot 6-165. Lower Extended Band Edge Plot (Band 25/2 – 20.0MHz QPSK – RB Size 100)

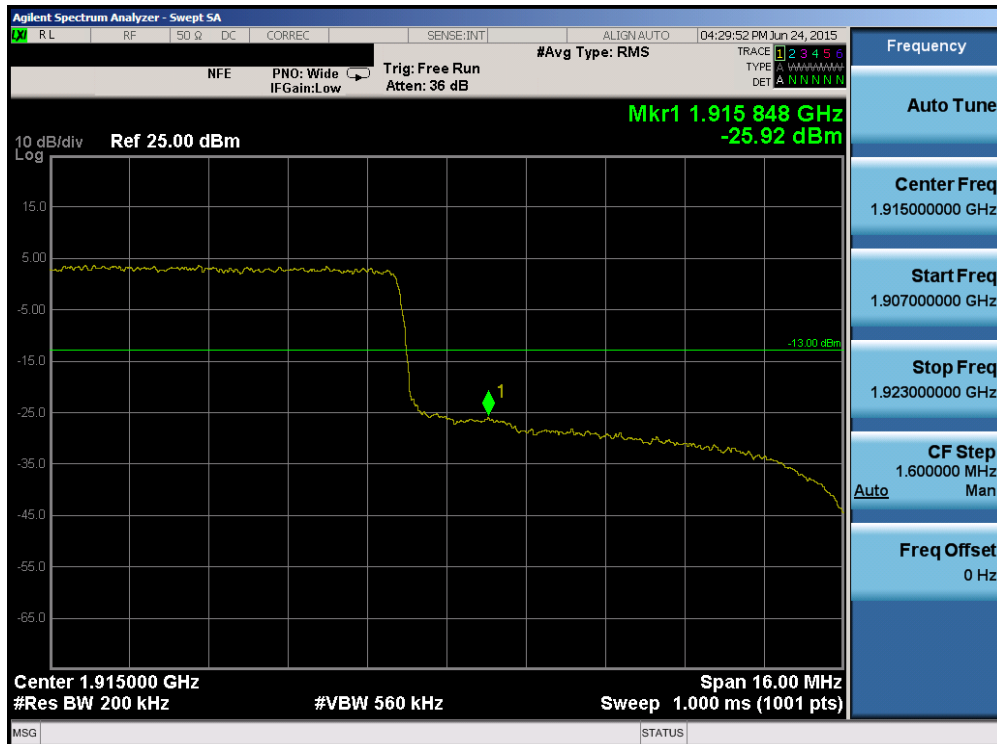


Plot 6-166. Upper Band Edge Plot (Band 25/2 – 20.0MHz QPSK – RB Size 100)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 99 of 142

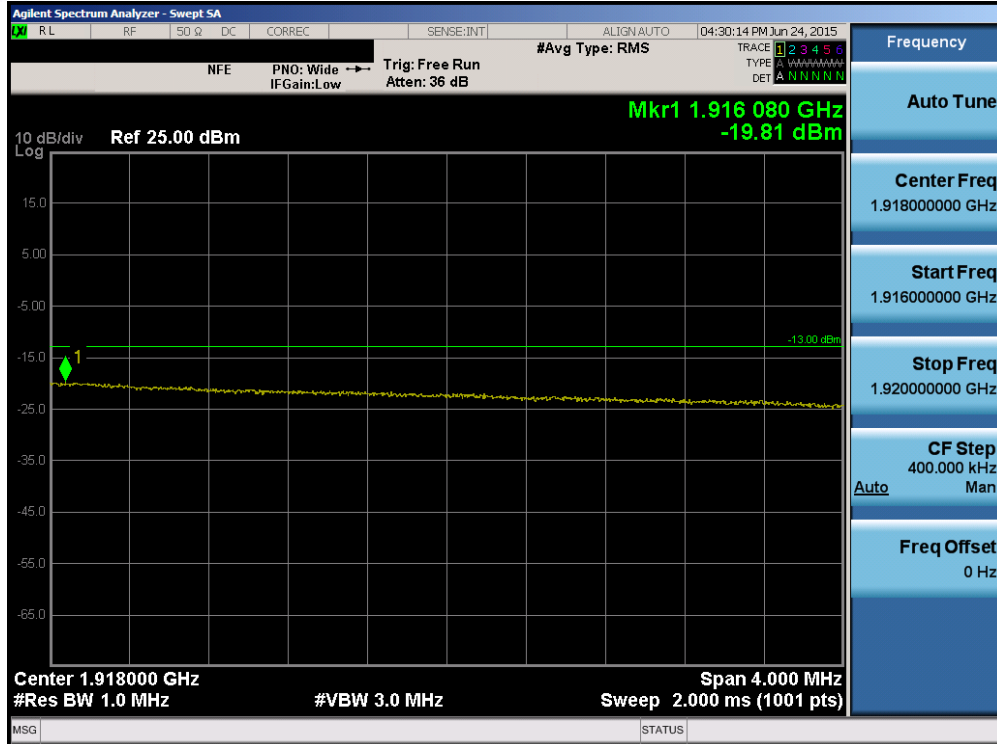


Plot 6-167. Upper Extended Band Edge Plot (Band 25/2 – 20.0MHz QPSK – RB Size 100)

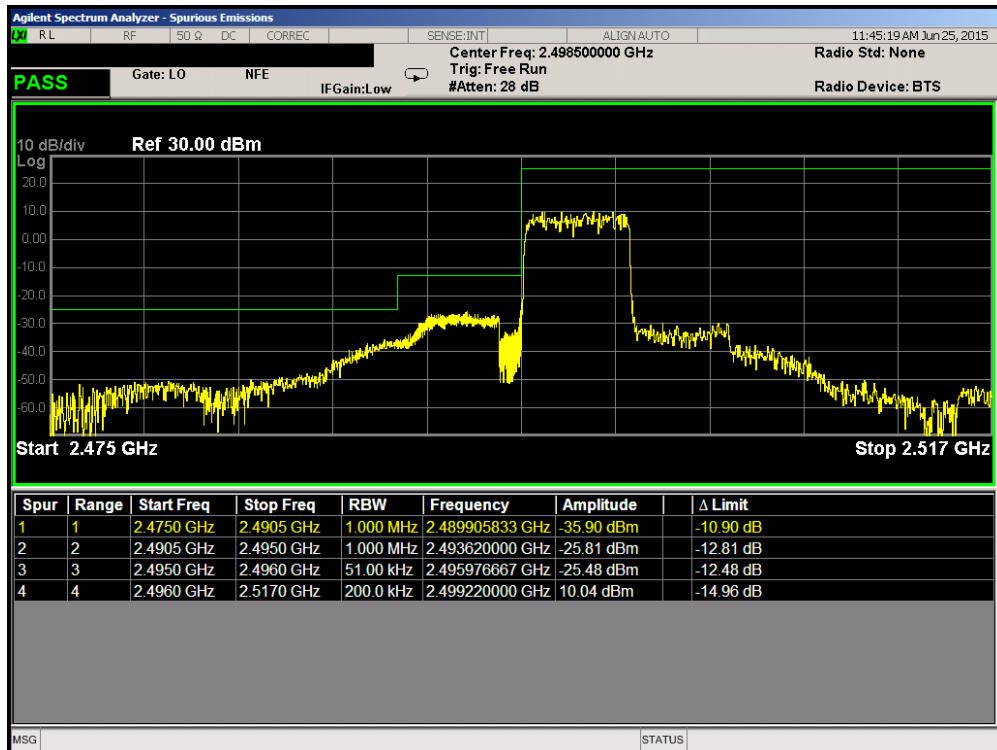


Plot 6-168. Lower ACP Plot (Band 41 – 5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 100 of 142

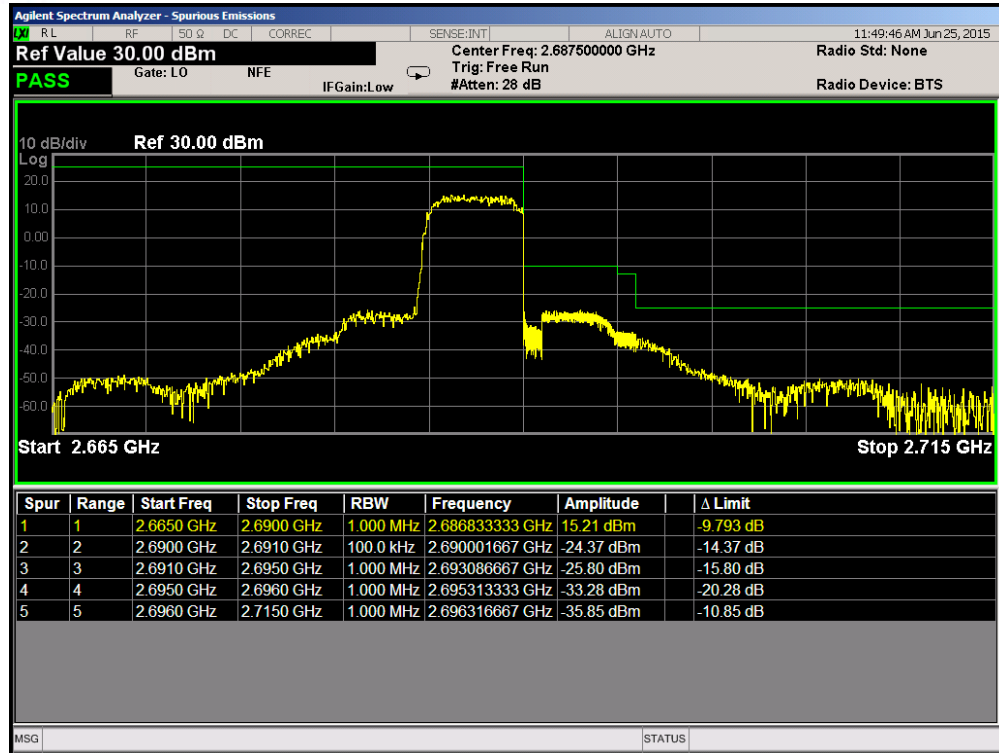


Plot 6-169. Upper ACP Plot (Band 41 – 5.0MHz QPSK – RB Size 25)

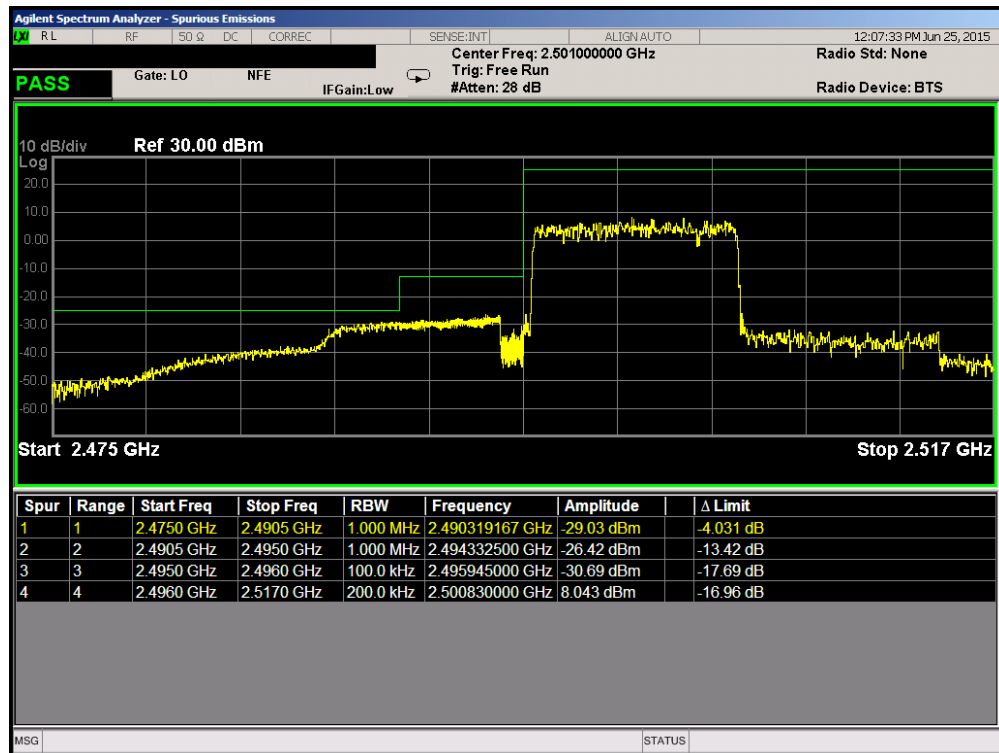


Plot 6-170. Lower ACP Plot (Band 41 – 10.0MHz QPSK – RB Size 50)

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 101 of 142

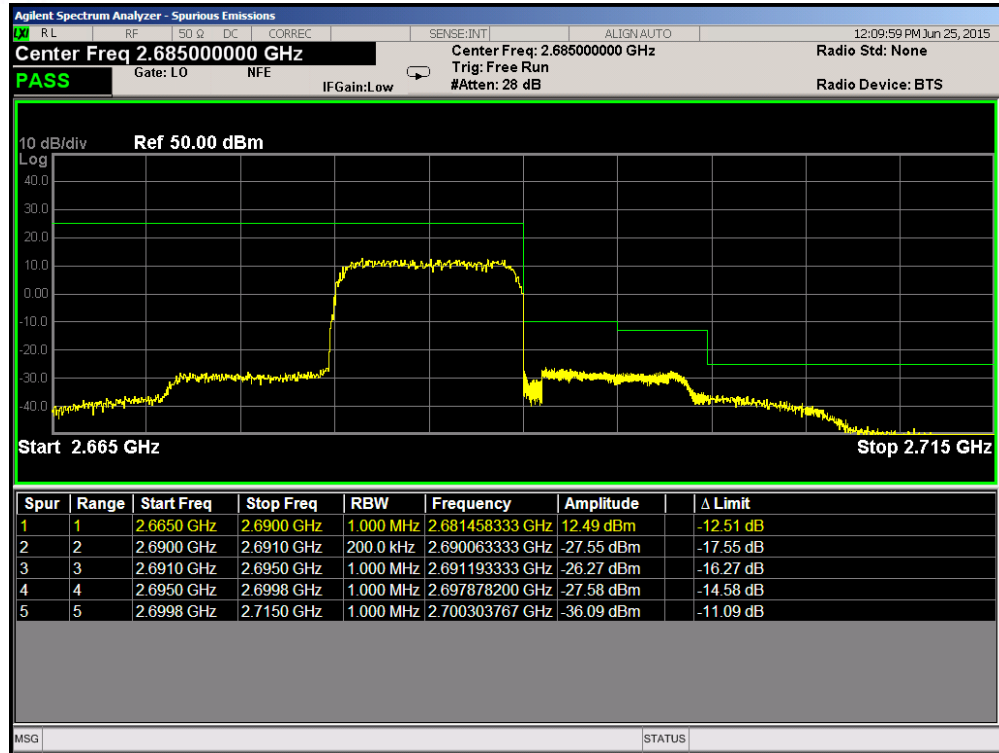


Plot 6-171. Upper ACP Plot (Band 41 – 10.0MHz QPSK – RB Size 50)

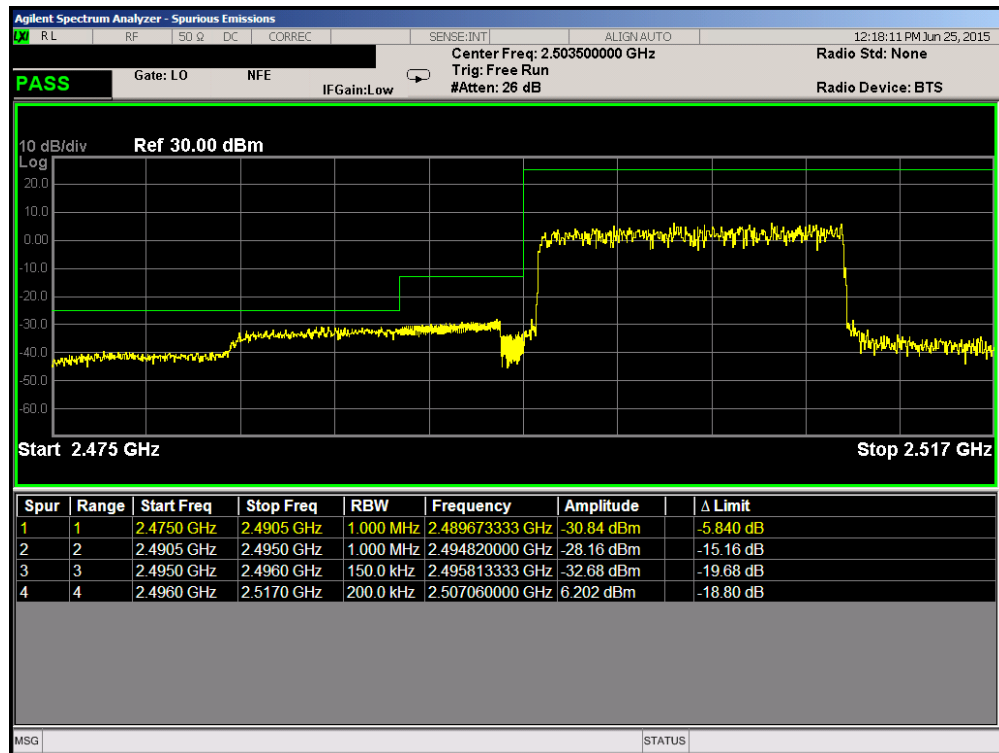


Plot 6-172. Lower ACP Plot (Band 41 – 15.0MHz QPSK – RB Size 75)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 102 of 142

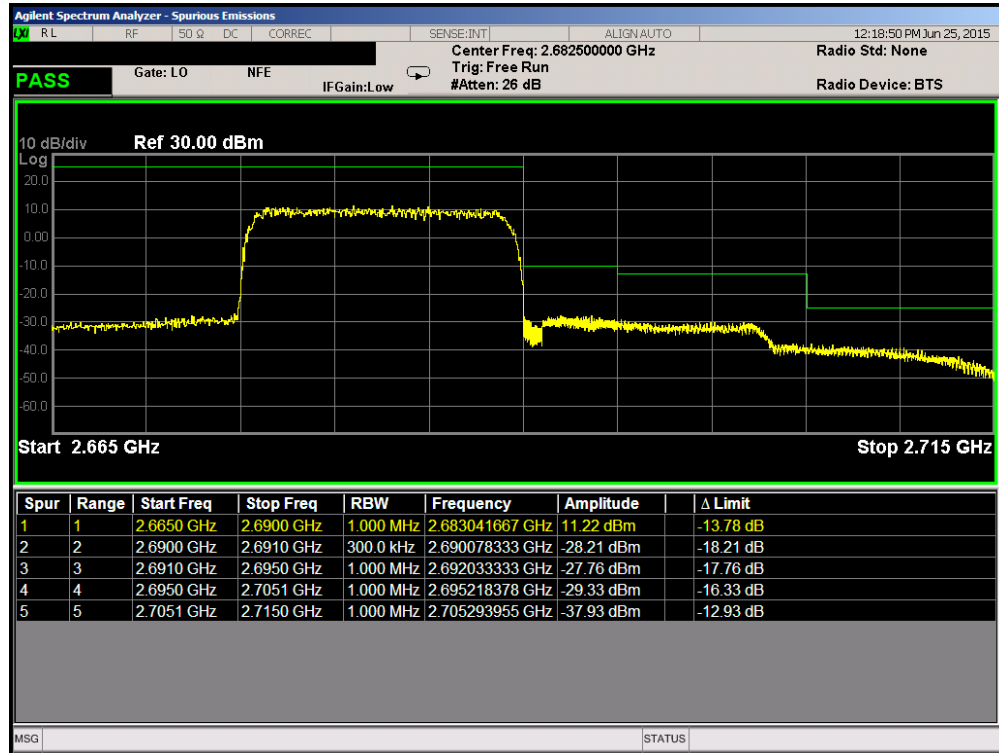


Plot 6-173. Upper ACP Plot (Band 41 – 15.0MHz QPSK – RB Size 75)

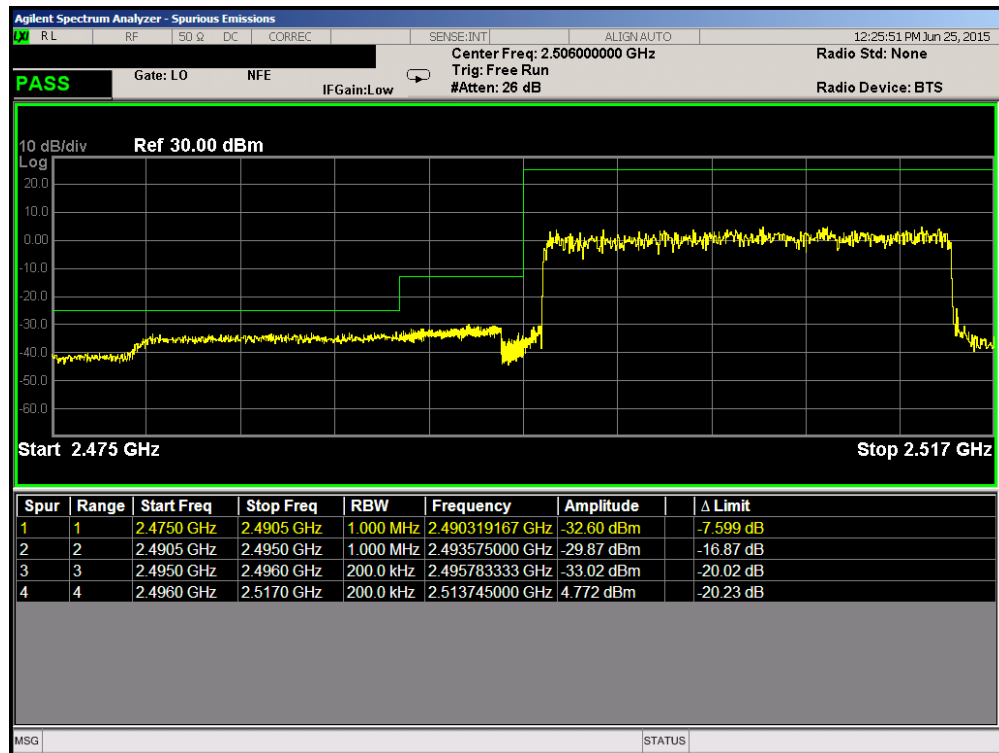

Plot 6-174. Lower ACP Plot (Band 41 – 20.0MHz QPSK – RB Size 100)

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 103 of 142

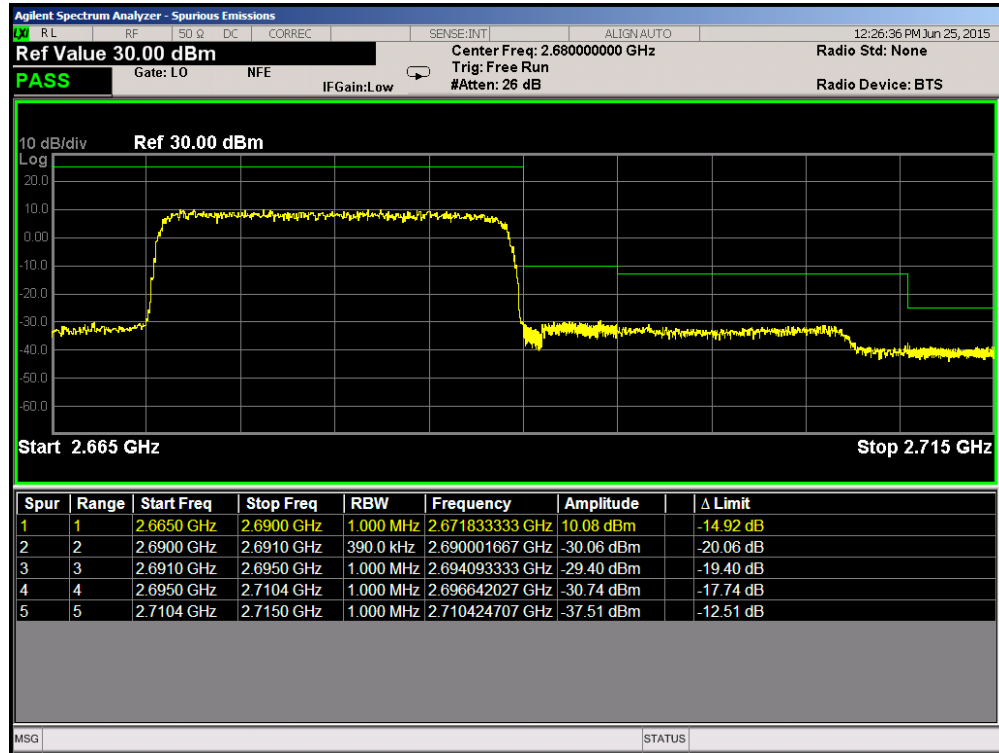

Plot 6-175. Upper ACP Plot (Band 41 – 20.0MHz QPSK – RB Size 100)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 104 of 142

6.5 Peak-Average Ratio

§24.232(d)

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 v02r02 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


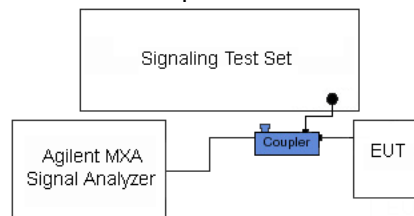


Figure 6-4. Test Instrument & Measurement Setup


Test Notes

None.

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 105 of 142

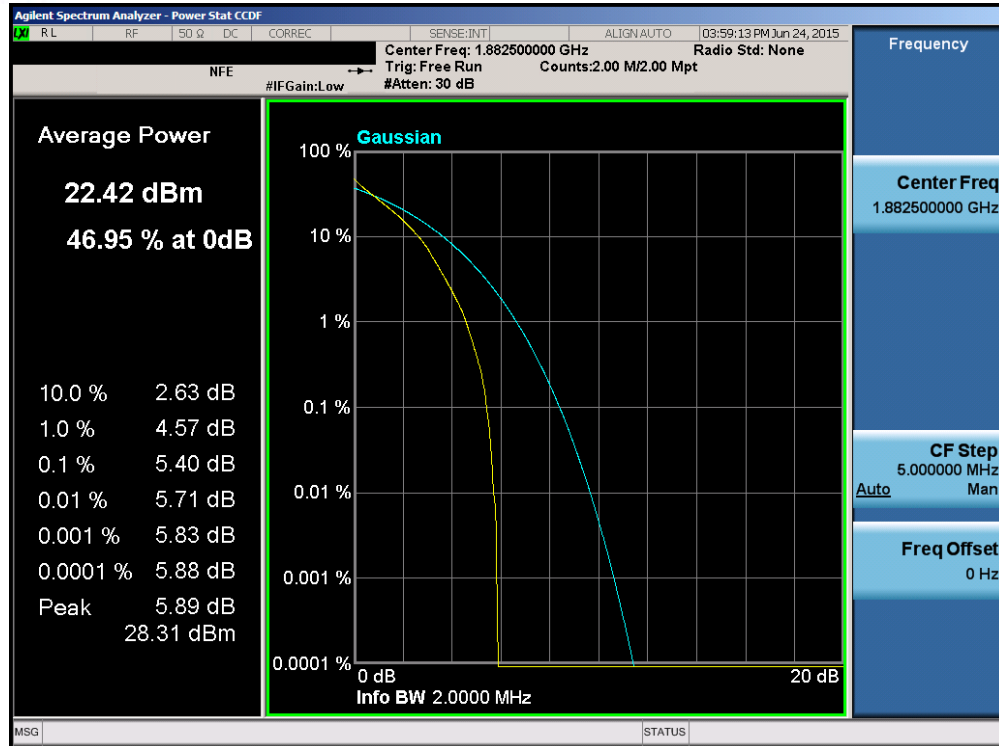


Plot 6-176. PAR Plot (Band 25/2 – 1.4MHz QPSK – RB Size 6)

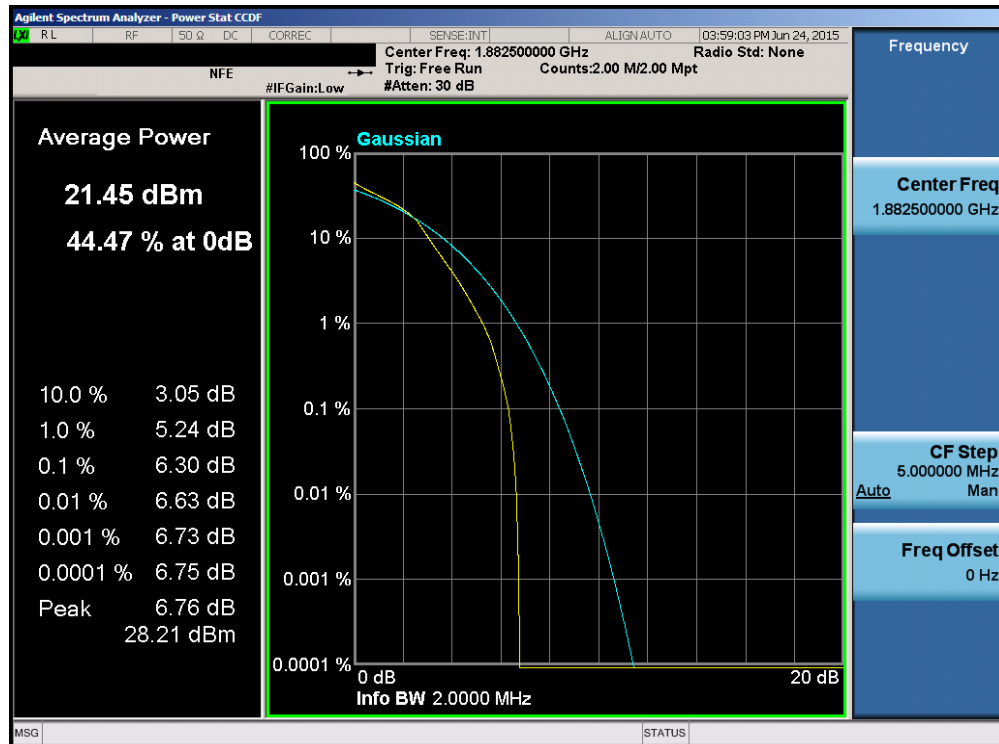


Plot 6-177. PAR Plot (Band 25/2 – 1.4MHz 16-QAM – RB Size 6)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 106 of 142

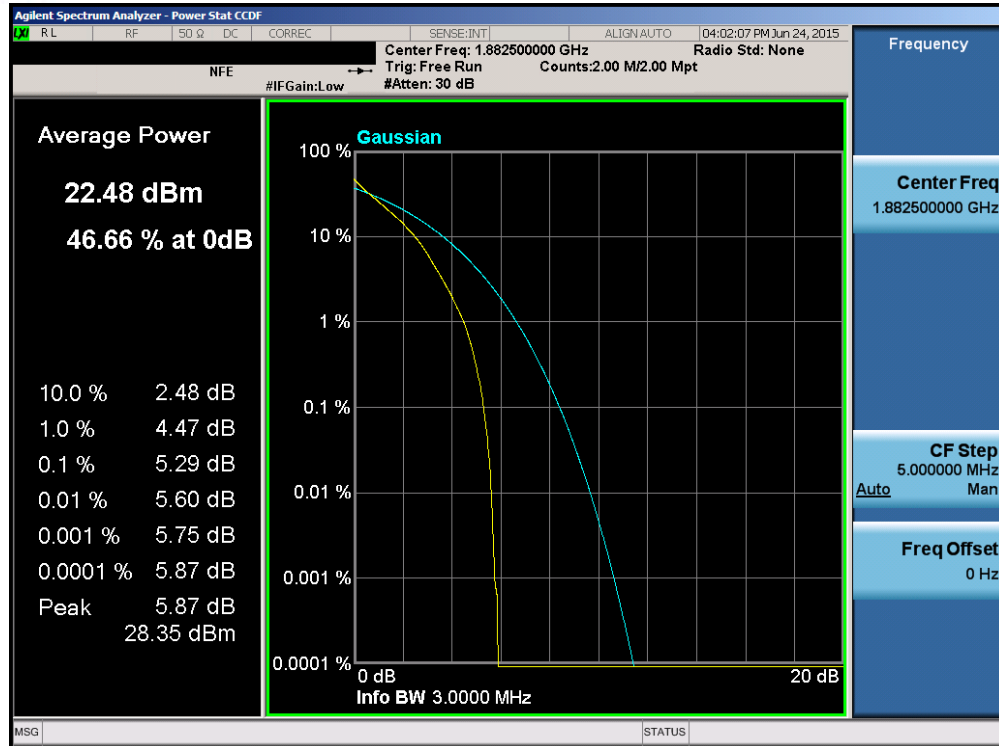


Plot 6-178. PAR Plot (Band 25/2 – 3.0MHz QPSK – RB Size 15)

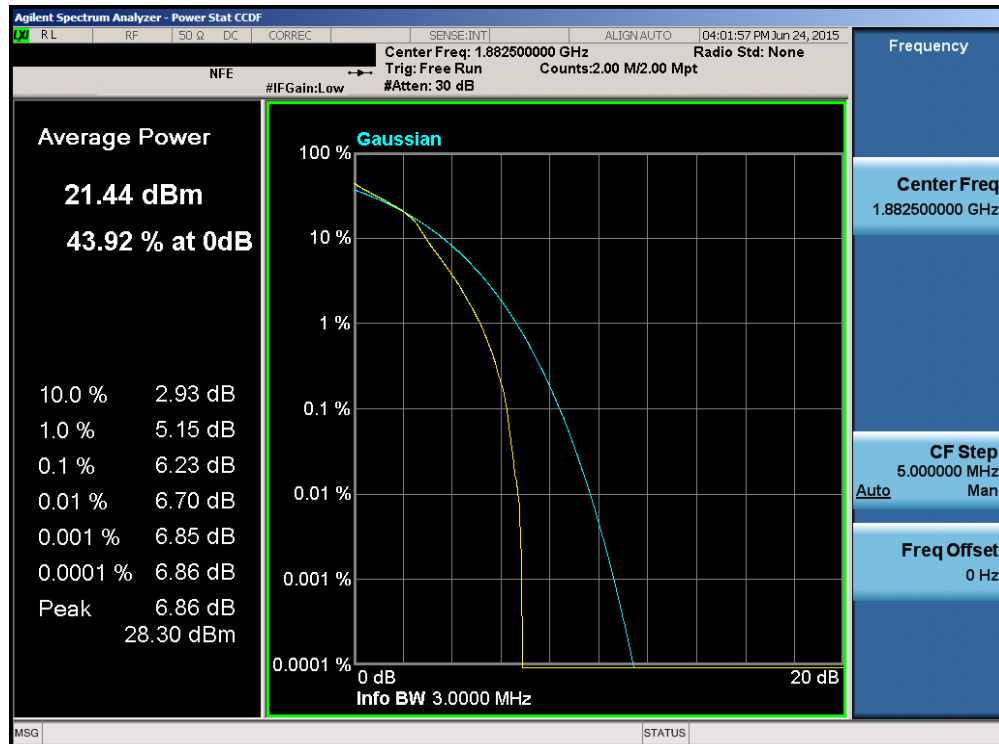


Plot 6-179. PAR Plot (Band 25/2 – 3.0MHz 16-QAM – RB Size 15)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 107 of 142

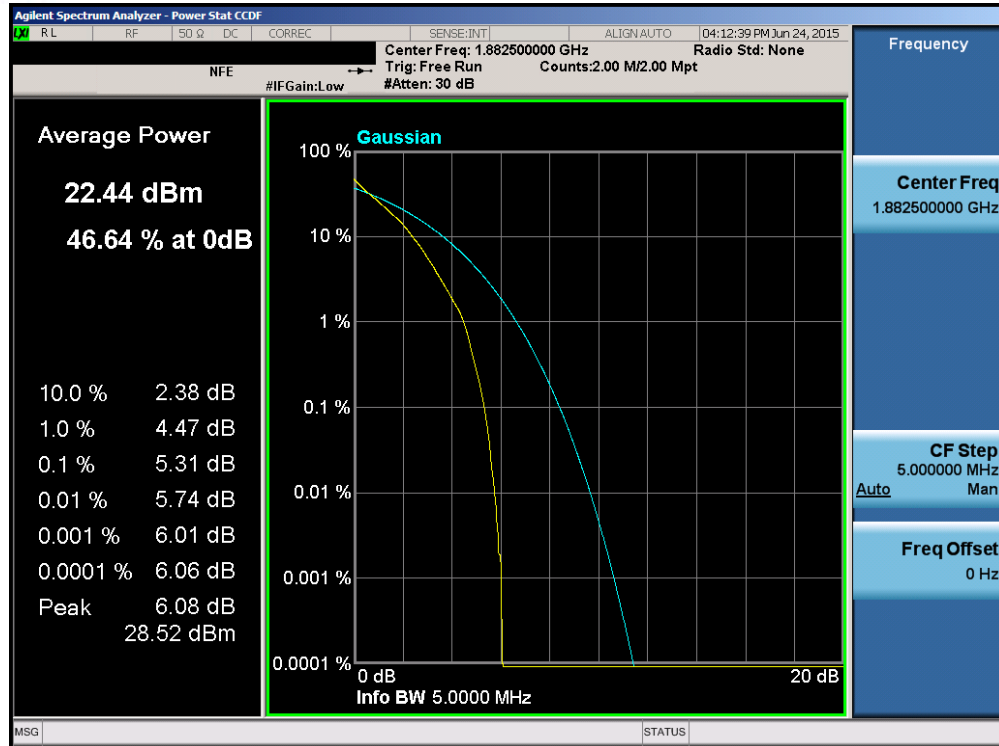


Plot 6-180. PAR Plot (Band 25/2 – 5.0MHz QPSK – RB Size 25)

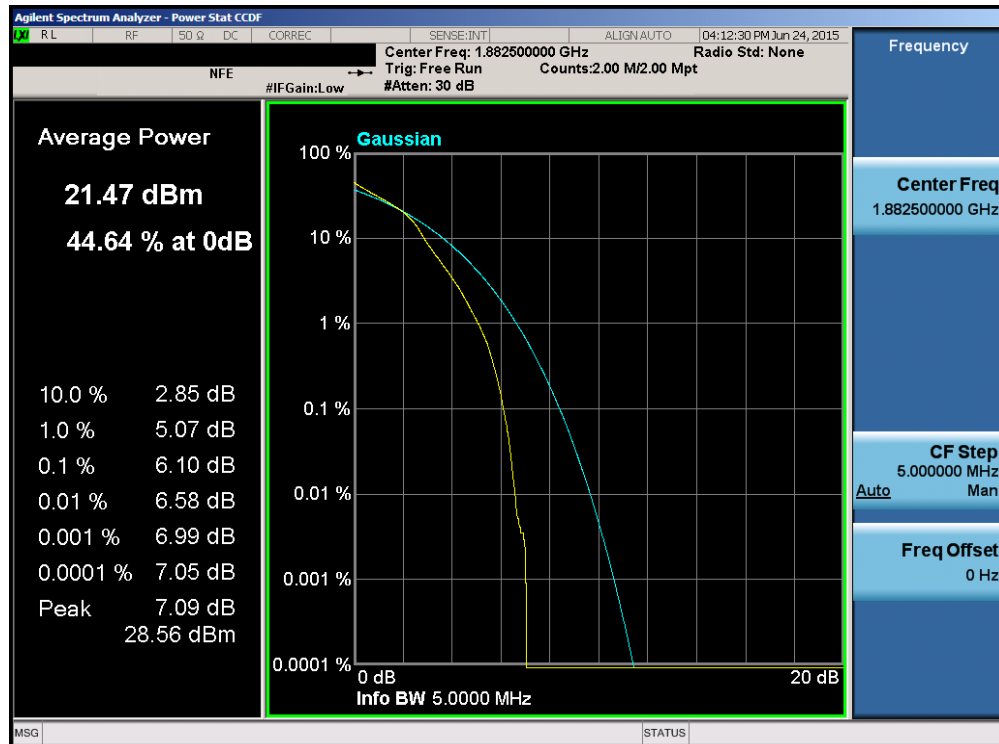


Plot 6-181. PAR Plot (Band 25/2 – 5.0MHz 16-QAM – RB Size 25)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 108 of 142

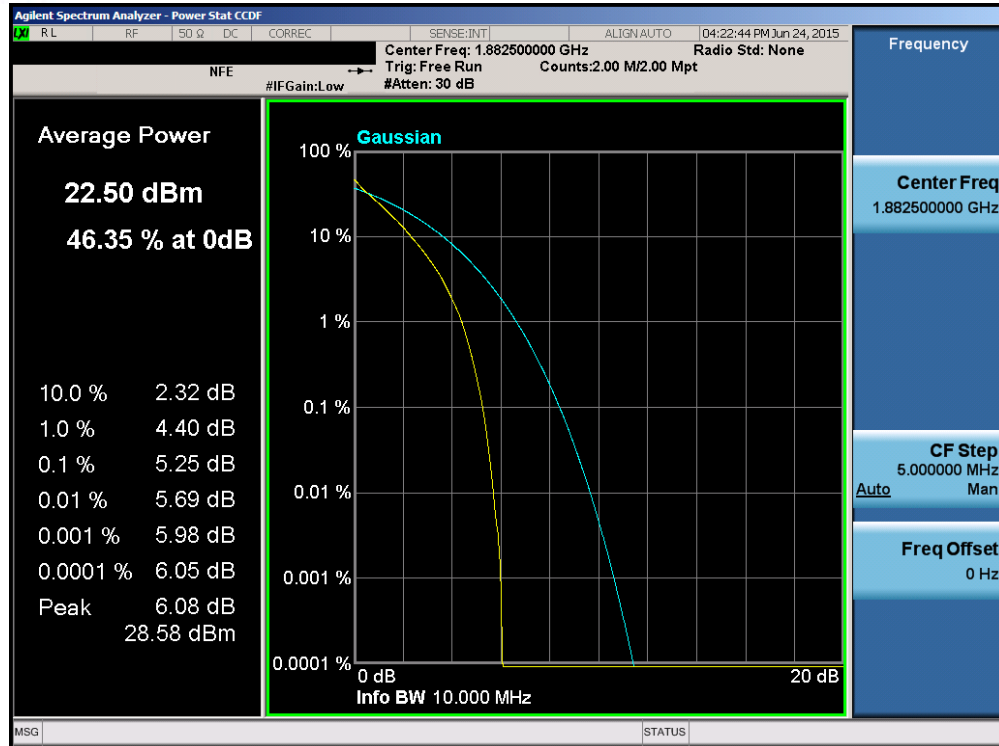


Plot 6-182. PAR Plot (Band 25/2 – 10.0MHz QPSK – RB Size 50)

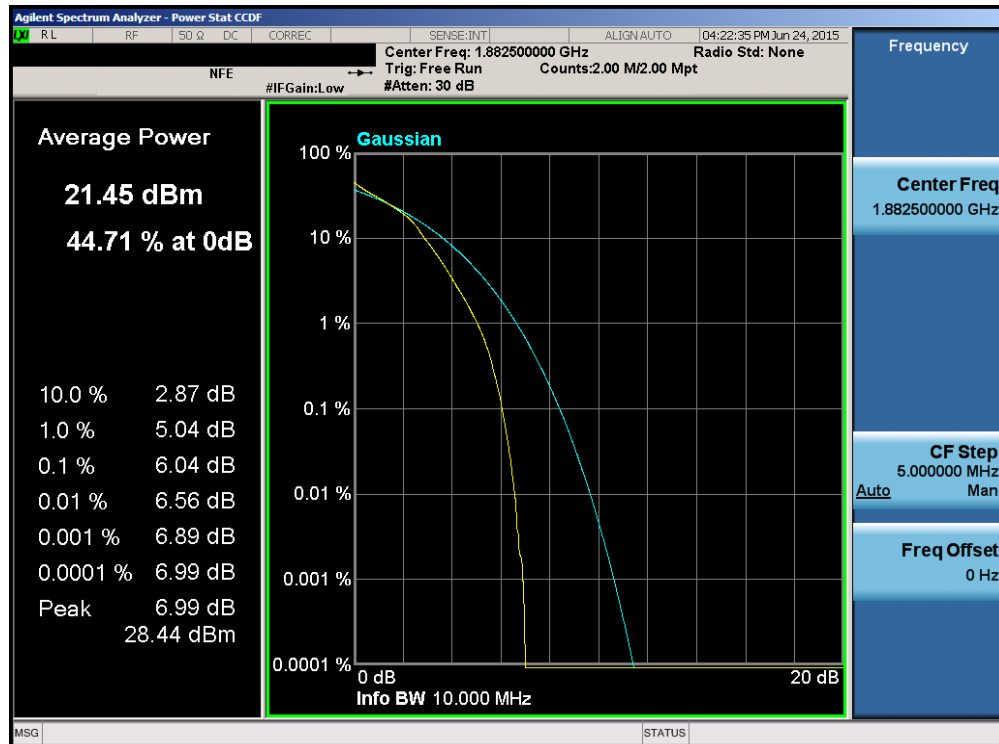


Plot 6-183. PAR Plot (Band 25/2 – 10.0MHz 16-QAM – RB Size 50)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 109 of 142

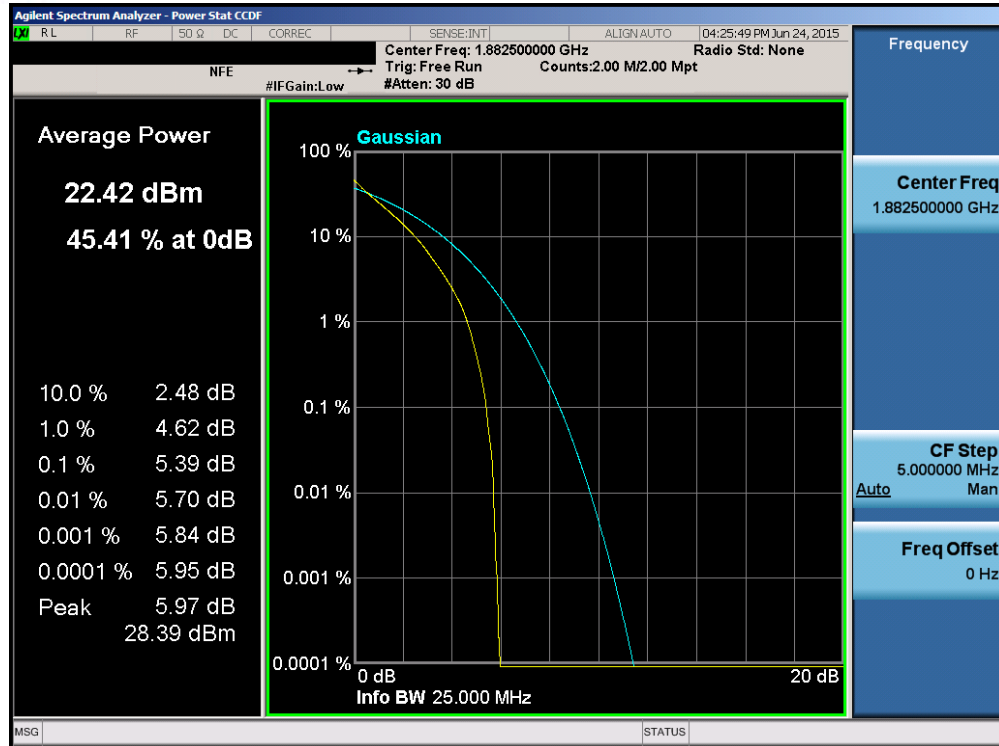


Plot 6-184. PAR Plot (Band 25/2 – 15.0MHz QPSK – RB Size 75)

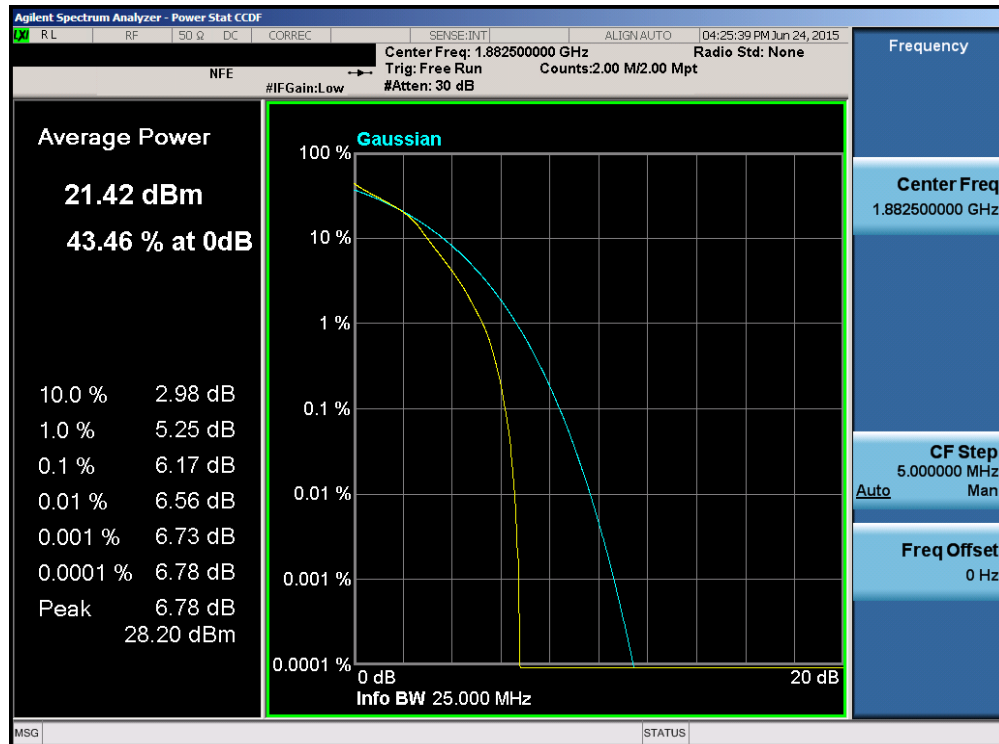


Plot 6-185. PAR Plot (Band 25/2 – 15.0MHz 16-QAM – RB Size 75)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 110 of 142

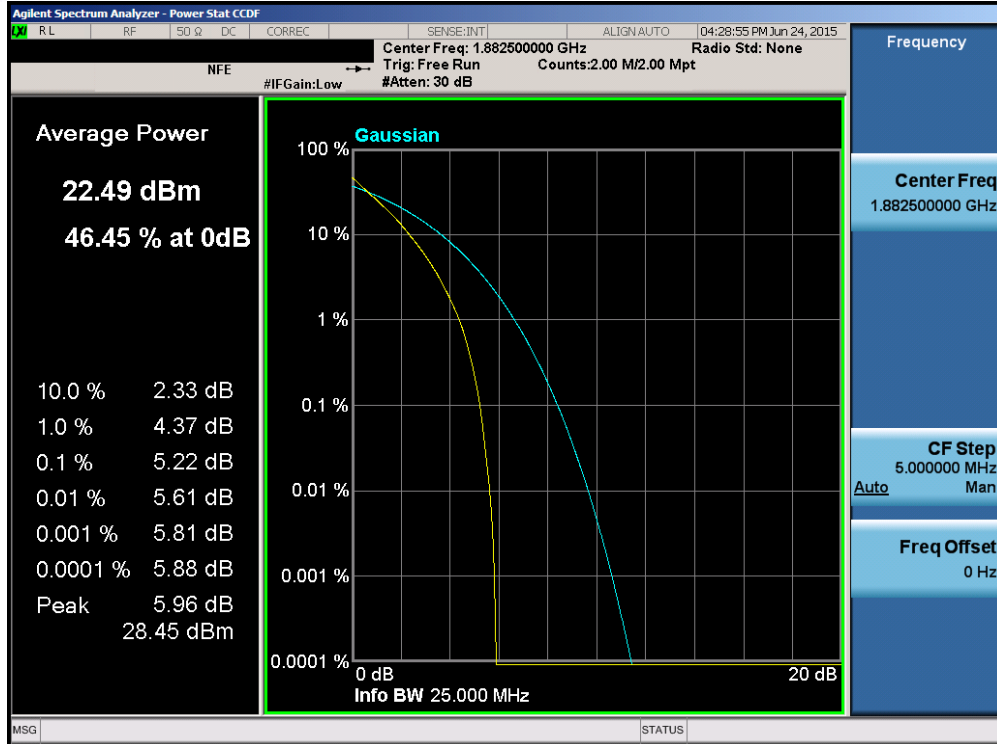

Plot 6-186. PAR Plot (Band 25/2 – 20.0MHz QPSK – RB Size 100)

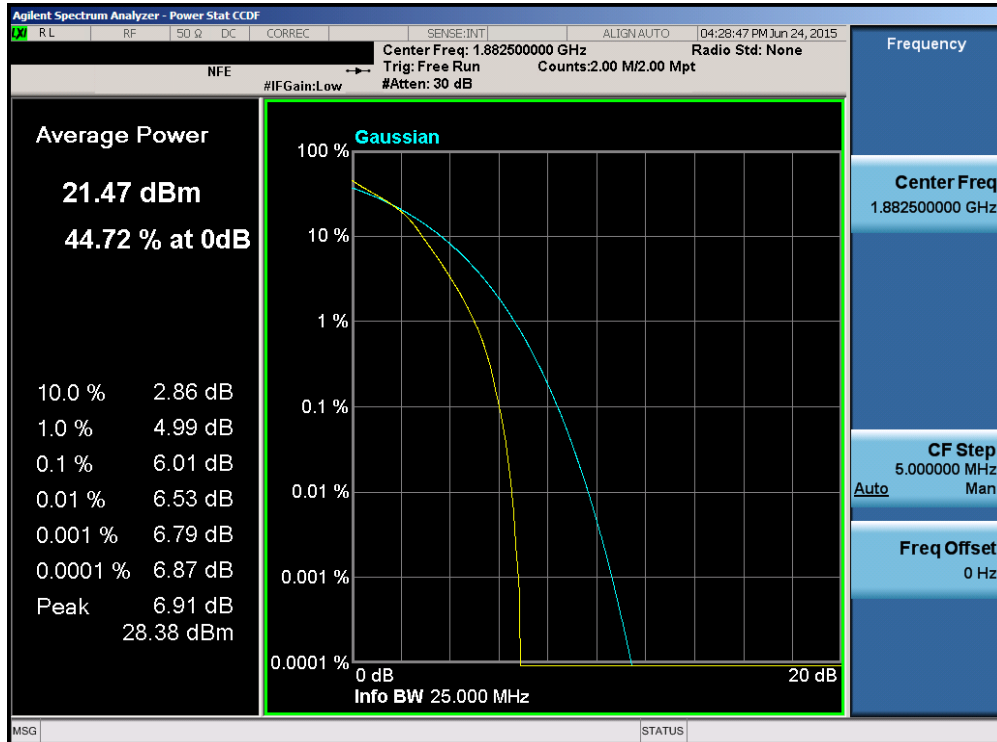

Plot 6-187. PAR Plot (Band 25/2 – 20.0MHz 16-QAM – RB Size 100)

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 111 of 142

6.6 Radiated Power (ERP/EIRP)

§22.913(a.2) §24.232(c.2) §27.50(h.2) §27.50(c.10) §27.50(d.4)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 v02r02 – Section 5.2.1

ANSI/TIA-603-C-2004 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 112 of 142

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

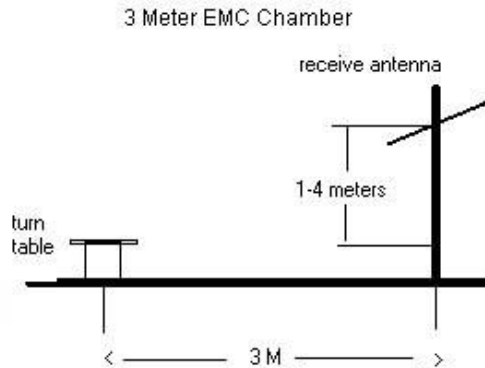


Figure 6-5. Test Instrument & Measurement Setup

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 113 of 142

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery Cover	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	Ant. Pol. [H/V]	ERP [dBm]	ERP Limit [dBm]	Margin [dB]
699.70	1.4	QPSK	Standard	1 / 0	20.95	0.91	V	21.86	34.77	-12.91
707.50	1.4	QPSK	Standard	1 / 0	20.25	1.07	V	21.32	34.77	-13.45
715.30	1.4	QPSK	Standard	1 / 0	19.24	1.23	V	20.47	34.77	-14.31
699.70	1.4	16-QAM	Standard	1 / 0	19.89	0.91	V	20.80	34.77	-13.97
707.50	1.4	16-QAM	Standard	1 / 0	19.45	1.07	V	20.52	34.77	-14.25
715.30	1.4	16-QAM	Standard	1 / 0	18.73	1.23	V	19.96	34.77	-14.82
700.50	3	QPSK	Standard	1 / 0	20.52	0.92	V	21.44	34.77	-13.33
707.50	3	QPSK	Standard	1 / 0	20.52	1.07	V	21.59	34.77	-13.18
714.50	3	QPSK	Standard	1 / 0	19.59	1.21	V	20.80	34.77	-13.97
700.50	3	16-QAM	Standard	1 / 0	19.89	0.92	V	20.81	34.77	-13.96
707.50	3	16-QAM	Standard	1 / 0	19.67	1.07	V	20.74	34.77	-14.03
714.50	3	16-QAM	Standard	1 / 0	19.59	1.21	V	20.80	34.77	-13.97
701.50	5	QPSK	Standard	1 / 0	20.69	0.94	V	21.63	34.77	-13.14
707.50	5	QPSK	Standard	1 / 0	20.80	1.07	V	21.87	34.77	-12.90
713.50	5	QPSK	Standard	1 / 0	19.71	1.19	V	20.90	34.77	-13.87
701.50	5	16-QAM	Standard	1 / 0	19.99	0.94	V	20.93	34.77	-13.84
707.50	5	16-QAM	Standard	1 / 0	20.08	1.07	V	21.15	34.77	-13.62
713.50	5	16-QAM	Standard	1 / 0	18.76	1.19	V	19.95	34.77	-14.82
704.00	10	QPSK	Standard	1 / 0	20.63	1.00	V	21.63	34.77	-13.14
707.50	10	QPSK	Standard	1 / 0	20.45	1.07	V	21.52	34.77	-13.25
711.00	10	QPSK	Standard	1 / 0	20.61	1.14	V	21.75	34.77	-13.02
704.00	10	16-QAM	Standard	1 / 0	19.73	1.00	V	20.73	34.77	-14.04
707.50	10	16-QAM	Standard	1 / 0	19.89	1.07	V	20.96	34.77	-13.81
711.00	10	16-QAM	Standard	1 / 0	19.25	1.14	V	20.39	34.77	-14.38

Table 6-2. ERP Data (Band 12)

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 114 of 142

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery Cover	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	Ant. Pol. [H/V]	ERP [dBm]	EIRP Limit [dBm]	Margin [dB]
824.70	1.4	QPSK	Standard	1 / 0	19.50	2.98	V	22.48	38.45	-15.97
836.50	1.4	QPSK	Standard	1 / 5	18.78	3.04	V	21.82	38.45	-16.63
848.30	1.4	QPSK	Standard	1 / 0	18.87	3.10	V	21.97	38.45	-16.48
824.70	1.4	16-QAM	Standard	1 / 0	18.25	2.98	V	21.23	38.45	-17.22
836.50	1.4	16-QAM	Standard	1 / 5	17.89	3.04	V	20.93	38.45	-17.52
848.30	1.4	16-QAM	Standard	1 / 0	18.33	3.10	V	21.43	38.45	-17.02
825.50	3	QPSK	Standard	1 / 0	18.40	2.98	V	21.38	38.45	-17.07
836.50	3	QPSK	Standard	1 / 14	18.94	3.04	V	21.98	38.45	-16.47
847.50	3	QPSK	Standard	1 / 0	18.33	3.10	V	21.43	38.45	-17.02
825.50	3	16-QAM	Standard	1 / 0	17.70	2.98	V	20.68	38.45	-17.77
836.50	3	16-QAM	Standard	1 / 14	18.20	3.04	V	21.24	38.45	-17.21
847.50	3	16-QAM	Standard	1 / 0	17.60	3.10	V	20.70	38.45	-17.75
826.50	5	QPSK	Standard	1 / 0	18.89	2.99	V	21.88	38.45	-16.57
836.50	5	QPSK	Standard	1 / 24	19.20	3.04	V	22.24	38.45	-16.21
846.50	5	QPSK	Standard	1 / 0	19.12	3.09	V	22.21	38.45	-16.24
826.50	5	16-QAM	Standard	1 / 0	18.05	2.99	V	21.04	38.45	-17.41
836.50	5	16-QAM	Standard	1 / 24	18.32	3.04	V	21.36	38.45	-17.09
846.50	5	16-QAM	Standard	1 / 0	18.27	3.09	V	21.36	38.45	-17.09
829.00	10	QPSK	Standard	1 / 0	18.66	3.00	V	21.66	38.45	-16.79
836.50	10	QPSK	Standard	1 / 49	19.24	3.04	V	22.28	38.45	-16.17
844.00	10	QPSK	Standard	1 / 0	18.42	3.08	V	21.50	38.45	-16.95
829.00	10	16-QAM	Standard	1 / 0	17.79	3.00	V	20.79	38.45	-17.66
836.50	10	16-QAM	Standard	1 / 49	18.54	3.04	V	21.58	38.45	-16.87
844.00	10	16-QAM	Standard	1 / 0	17.94	3.08	V	21.02	38.45	-17.43
831.50	15	QPSK	Standard	1 / 74	18.35	3.01	V	21.36	38.45	-17.09
836.50	15	QPSK	Standard	1 / 74	19.21	3.04	V	22.25	38.45	-16.20
841.50	15	QPSK	Standard	1 / 74	18.89	3.07	V	21.96	38.45	-16.49
831.50	15	16-QAM	Standard	1 / 74	17.60	3.01	V	20.61	38.45	-17.84
836.50	15	16-QAM	Standard	1 / 74	18.30	3.04	V	21.34	38.45	-17.11
841.50	15	16-QAM	Standard	1 / 74	18.14	3.07	V	21.21	38.45	-17.24

Table 6-3. ERP Data (Band 5/26)

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)					Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset				Page 115 of 142	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery Cover	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1710.70	1.4	QPSK	Standard	1 / 5	12.94	9.28	V	22.22	30.00	-7.78
1732.50	1.4	QPSK	Standard	3 / 2	12.44	9.00	V	21.44	30.00	-8.56
1754.30	1.4	QPSK	Standard	1 / 0	11.73	8.72	V	20.45	30.00	-9.55
1710.70	1.4	16-QAM	Standard	1 / 5	12.37	9.28	V	21.65	30.00	-8.35
1732.50	1.4	16-QAM	Standard	1 / 0	11.62	9.00	V	20.62	30.00	-9.38
1754.30	1.4	16-QAM	Standard	1 / 0	10.96	8.72	V	19.68	30.00	-10.32
1711.50	3	QPSK	Standard	1 / 0	12.35	9.27	V	21.62	30.00	-8.38
1732.50	3	QPSK	Standard	1 / 0	12.07	9.00	V	21.07	30.00	-8.93
1753.50	3	QPSK	Standard	1 / 0	11.86	8.73	V	20.59	30.00	-9.41
1711.50	3	16-QAM	Standard	1 / 0	11.55	9.27	V	20.82	30.00	-9.18
1732.50	3	16-QAM	Standard	1 / 0	11.28	9.00	V	20.28	30.00	-9.72
1753.50	3	16-QAM	Standard	1 / 0	11.14	8.73	V	19.87	30.00	-10.13
1712.50	5	QPSK	Standard	1 / 0	13.13	9.26	V	22.39	30.00	-7.61
1732.50	5	QPSK	Standard	1 / 24	13.19	9.00	V	22.19	30.00	-7.81
1752.50	5	QPSK	Standard	1 / 0	12.78	8.74	V	21.52	30.00	-8.48
1712.50	5	16-QAM	Standard	1 / 0	12.32	9.26	V	21.58	30.00	-8.42
1732.50	5	16-QAM	Standard	1 / 24	12.44	9.00	V	21.44	30.00	-8.56
1752.50	5	16-QAM	Standard	1 / 0	12.03	8.74	V	20.77	30.00	-9.23
1715.00	10	QPSK	Standard	1 / 0	12.73	9.22	V	21.95	30.00	-8.05
1732.50	10	QPSK	Standard	1 / 0	12.34	9.00	V	21.34	30.00	-8.66
1750.00	10	QPSK	Standard	1 / 0	12.37	8.77	V	21.14	30.00	-8.86
1715.00	10	16-QAM	Standard	1 / 0	11.98	9.22	V	21.20	30.00	-8.80
1732.50	10	16-QAM	Standard	1 / 0	11.53	9.00	V	20.53	30.00	-9.47
1750.00	10	16-QAM	Standard	1 / 0	11.62	8.77	V	20.39	30.00	-9.61
1717.50	15	QPSK	Standard	1 / 74	11.86	9.19	V	21.05	30.00	-8.95
1732.50	15	QPSK	Standard	1 / 0	12.78	9.00	V	21.78	30.00	-8.22
1747.50	15	QPSK	Standard	1 / 0	12.84	8.80	V	21.64	30.00	-8.36
1717.50	15	16-QAM	Standard	1 / 74	11.13	9.19	V	20.32	30.00	-9.68
1732.50	15	16-QAM	Standard	1 / 0	11.86	9.00	V	20.86	30.00	-9.14
1747.50	15	16-QAM	Standard	1 / 0	12.05	8.80	V	20.85	30.00	-9.15
1720.00	20	QPSK	Standard	1 / 99	12.85	9.16	V	22.01	30.00	-7.99
1732.50	20	QPSK	Standard	1 / 99	12.49	9.00	V	21.49	30.00	-8.51
1745.00	20	QPSK	Standard	1 / 0	13.44	8.83	V	22.27	30.00	-7.73
1720.00	20	16-QAM	Standard	1 / 99	12.11	9.16	V	21.27	30.00	-8.73
1732.50	20	16-QAM	Standard	1 / 0	11.64	9.00	V	20.64	30.00	-9.36
1745.00	20	16-QAM	Standard	1 / 0	12.43	8.83	V	21.26	30.00	-8.74

Table 6-4. EIRP Data (Band 4)

FCC ID: A3LSMG928P	 FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION) 			Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 116 of 142

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery Cover	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1850.70	1.4	QPSK	Standard	1 / 0	13.34	8.34	V	21.68	33.01	-11.33
1882.50	1.4	QPSK	Standard	1 / 0	12.85	8.47	V	21.32	33.01	-11.69
1914.30	1.4	QPSK	Standard	1 / 5	11.14	8.70	V	19.84	33.01	-13.17
1850.70	1.4	16-QAM	Standard	1 / 0	12.03	8.34	V	20.37	33.01	-12.64
1882.50	1.4	16-QAM	Standard	1 / 0	11.85	8.47	V	20.32	33.01	-12.69
1914.30	1.4	16-QAM	Standard	1 / 5	10.38	8.70	V	19.08	33.01	-13.93
1851.50	3	QPSK	Standard	1 / 14	13.27	8.35	V	21.62	33.01	-11.39
1882.50	3	QPSK	Standard	1 / 0	11.74	8.47	V	20.21	33.01	-12.80
1913.50	3	QPSK	Standard	1 / 14	12.00	8.69	V	20.69	33.01	-12.32
1851.50	3	16-QAM	Standard	1 / 14	12.48	8.35	V	20.83	33.01	-12.18
1882.50	3	16-QAM	Standard	1 / 0	11.01	8.47	V	19.48	33.01	-13.53
1913.50	3	16-QAM	Standard	1 / 0	10.74	8.69	V	19.43	33.01	-13.58
1852.50	5	QPSK	Standard	1 / 0	13.21	8.35	V	21.56	33.01	-11.45
1882.50	5	QPSK	Standard	1 / 0	14.17	8.47	V	22.64	33.01	-10.37
1912.50	5	QPSK	Standard	1 / 0	12.08	8.68	V	20.76	33.01	-12.25
1852.50	5	16-QAM	Standard	1 / 0	12.55	8.35	V	20.90	33.01	-12.11
1882.50	5	16-QAM	Standard	1 / 0	13.45	8.47	V	21.92	33.01	-11.09
1912.50	5	16-QAM	Standard	1 / 0	11.42	8.68	V	20.10	33.01	-12.91
1855.00	10	QPSK	Standard	1 / 0	12.12	8.36	V	20.48	33.01	-12.53
1882.50	10	QPSK	Standard	1 / 0	13.91	8.47	V	22.38	33.01	-10.63
1910.00	10	QPSK	Standard	1 / 0	10.58	8.65	V	19.23	33.01	-13.78
1855.00	10	16-QAM	Standard	1 / 0	11.63	8.36	V	19.99	33.01	-13.02
1882.50	10	16-QAM	Standard	1 / 0	13.10	8.47	V	21.57	33.01	-11.44
1910.00	10	16-QAM	Standard	1 / 0	10.13	8.65	V	18.78	33.01	-14.23
1857.50	15	QPSK	Standard	1 / 74	12.75	8.37	V	21.12	33.01	-11.89
1882.50	15	QPSK	Standard	1 / 0	14.02	8.47	V	22.49	33.01	-10.52
1907.50	15	QPSK	Standard	1 / 0	10.90	8.62	V	19.52	33.01	-13.49
1857.50	15	16-QAM	Standard	1 / 74	11.72	8.37	V	20.09	33.01	-12.92
1882.50	15	16-QAM	Standard	1 / 0	13.04	8.47	V	21.51	33.01	-11.50
1907.50	15	16-QAM	Standard	1 / 0	10.08	8.62	V	18.70	33.01	-14.31
1860.00	20	QPSK	Standard	1 / 99	12.98	8.38	V	21.36	33.01	-11.65
1882.50	20	QPSK	Standard	1 / 0	14.56	8.47	V	23.03	33.01	-9.98
1905.00	20	QPSK	Standard	1 / 0	11.65	8.59	V	20.24	33.01	-12.77
1860.00	20	16-QAM	Standard	1 / 99	12.31	8.38	V	20.69	33.01	-12.32
1882.50	20	16-QAM	Standard	1 / 0	13.56	8.47	V	22.03	33.01	-10.98
1905.00	20	16-QAM	Standard	1 / 0	10.91	8.59	V	19.50	33.01	-13.51

Table 6-5. EIRP Data (Band 25/2)

FCC ID: A3LSMG928P	 FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION) 			Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 117 of 142

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery Cover	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
2498.50	5	QPSK	Standard	1 / 0	11.45	7.09	V	18.54	33.01	-14.47
2593.00	5	QPSK	Standard	1 / 0	11.76	7.55	V	19.31	33.01	-13.70
2687.50	5	QPSK	Standard	1 / 0	10.31	7.82	V	18.13	33.01	-14.88
2498.50	5	16-QAM	Standard	1 / 0	10.71	7.09	V	17.80	33.01	-15.21
2593.00	5	16-QAM	Standard	1 / 0	10.76	7.55	V	18.31	33.01	-14.70
2687.50	5	16-QAM	Standard	1 / 0	9.46	7.82	V	17.28	33.01	-15.73
2501.00	10	QPSK	Standard	1 / 0	11.82	7.08	V	18.90	33.01	-14.11
2593.00	10	QPSK	Standard	1 / 49	10.77	7.55	V	18.32	33.01	-14.69
2685.00	10	QPSK	Standard	1 / 0	9.85	7.81	V	17.66	33.01	-15.35
2501.00	10	16-QAM	Standard	1 / 0	11.30	7.08	V	18.38	33.01	-14.63
2593.00	10	16-QAM	Standard	1 / 49	10.45	7.55	V	18.00	33.01	-15.01
2685.00	10	16-QAM	Standard	1 / 0	8.98	7.81	V	16.79	33.01	-16.22
2503.50	15	QPSK	Standard	1 / 0	11.41	7.10	V	18.51	33.01	-14.50
2593.00	15	QPSK	Standard	1 / 0	11.00	7.55	V	18.55	33.01	-14.46
2682.50	15	QPSK	Standard	1 / 0	10.45	7.81	V	18.26	33.01	-14.75
2503.50	15	16-QAM	Standard	1 / 0	10.72	7.10	V	17.82	33.01	-15.19
2593.00	15	16-QAM	Standard	1 / 0	10.39	7.55	V	17.94	33.01	-15.07
2682.50	15	16-QAM	Standard	1 / 0	9.55	7.81	V	17.36	33.01	-15.65
2506.00	20	QPSK	Standard	1 / 0	11.66	7.11	V	18.77	33.01	-14.24
2593.00	20	QPSK	Standard	1 / 0	11.01	7.55	V	18.56	33.01	-14.45
2680.00	20	QPSK	Standard	1 / 0	10.46	7.80	V	18.26	33.01	-14.75
2506.00	20	16-QAM	Standard	1 / 0	10.61	7.11	V	17.72	33.01	-15.29
2593.00	20	16-QAM	Standard	1 / 0	10.73	7.55	V	18.28	33.01	-14.73
2680.00	20	16-QAM	Standard	1 / 0	9.76	7.80	V	17.56	33.01	-15.45

Table 6-6. EIRP Data (Band 41)

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 118 of 142

6.7 Radiated Spurious Emissions Measurements

§2.1053 §22.917(a) §24.238(a) §27.53(g) §27.53(h) §27.53(m)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 v02r02 – Section 5.8

ANSI/TIA-603-C-2004 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

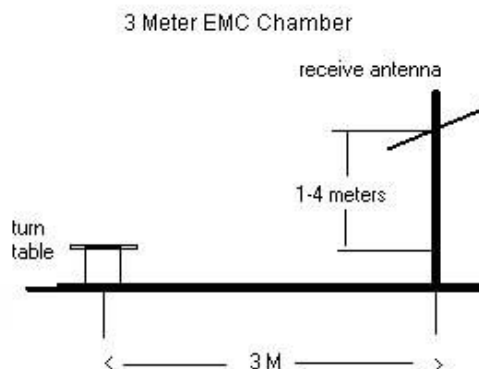


Figure 6-6. Test Instrument & Measurement Setup

FCC ID: A3LSMG928P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 119 of 142

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset	Page 120 of 142	

OPERATING FREQUENCY: 701.50 MHz
 CHANNEL: 23035
 MEASURED OUTPUT POWER: 21.63 dBm = 0.146 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.63 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1403.00	-66.39	5.66	-60.73	H	82.4
2104.50	-61.65	6.63	-55.02	H	76.7
2806.00	-61.39	7.84	-53.55	H	75.2
3507.50	-59.29	7.58	-51.71	H	73.3
4209.00	-59.12	8.28	-50.84	H	72.5

Table 6-7. Radiated Spurious Data (Band 12 – Low Channel)

OPERATING FREQUENCY: 707.50 MHz
 CHANNEL: 23095
 MEASURED OUTPUT POWER: 21.87 dBm = 0.154 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.87 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1415.00	-61.13	5.73	-55.40	H	77.3
2122.50	-64.41	6.73	-57.68	H	79.6
2830.00	-59.35	7.80	-51.55	H	73.4
3537.50	-60.28	7.59	-52.69	H	74.6
4245.00	-58.88	8.41	-50.47	H	72.3

Table 6-8. Radiated Spurious Data (Band 12 – Mid Channel)

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 121 of 142

OPERATING FREQUENCY: 713.50 MHz
 CHANNEL: 23155
 MEASURED OUTPUT POWER: 20.90 dBm = 0.123 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 33.90 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1427.00	-62.57	5.80	-56.77	H	77.7
2140.50	-60.37	6.83	-53.54	H	74.4
2854.00	-62.02	7.76	-54.26	H	75.2
3567.50	-60.28	7.60	-52.68	H	73.6
4281.00	-59.84	8.53	-51.32	H	72.2

Table 6-9. Radiated Spurious Data (Band 12 – High Channel)

OPERATING FREQUENCY: 707.50 MHz
 CHANNEL: 23095
 MEASURED OUTPUT POWER: 21.87 dBm = 0.154 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.87 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1415.00	-59.28	5.73	-53.55	H	75.4
2122.50	-64.58	6.73	-57.85	H	79.7
2830.00	-63.84	7.80	-56.04	H	77.9
3537.50	-62.49	7.59	-54.90	H	76.8

Table 6-10. Radiated Spurious Data with WCP (Band 12 – Mid Channel)

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 122 of 142

OPERATING FREQUENCY: 824.70 MHz
 CHANNEL: 26797
 MEASURED OUTPUT POWER: 22.48 dBm = 0.177 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 35.48 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1649.40	-65.76	6.56	-59.21	H	81.7
2474.10	-60.57	7.30	-53.27	H	75.8
3298.80	-59.27	7.37	-51.91	H	74.4
4123.50	-59.49	8.02	-51.47	H	73.9
4948.20	-59.35	8.74	-50.61	H	73.1

Table 6-11. Radiated Spurious Data (Band 5/26 – Low Channel)

OPERATING FREQUENCY: 836.50 MHz
 CHANNEL: 26915
 MEASURED OUTPUT POWER: 21.82 dBm = 0.152 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.82 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1673.00	-65.07	6.55	-58.51	H	80.3
2509.50	-58.93	7.34	-51.59	H	73.4
3346.00	-57.50	7.44	-50.06	H	71.9
4182.50	-60.36	8.20	-52.16	H	74.0
5019.00	-59.13	8.74	-50.39	H	72.2

Table 6-12. Radiated Spurious Data (Band 5/26 – Mid Channel)

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 123 of 142

OPERATING FREQUENCY: 848.30 MHz
 CHANNEL: 27033
 MEASURED OUTPUT POWER: 21.97 dBm = 0.158 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 34.97 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1696.60	-63.10	6.55	-56.56	H	78.5
2544.90	-58.06	7.36	-50.70	H	72.7
3393.20	-55.69	7.51	-48.18	H	70.2
4241.50	-57.80	8.39	-49.40	H	71.4
5089.80	-60.27	8.61	-51.66	H	73.6
5938.10	-59.66	9.26	-50.40	H	72.4

Table 6-13. Radiated Spurious Data (Band 5/26 – High Channel)

OPERATING FREQUENCY: 824.70 MHz
 CHANNEL: 26797
 MEASURED OUTPUT POWER: 22.48 dBm = 0.177 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 35.48 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1649.40	-67.18	6.56	-60.63	H	83.1
2474.10	-64.79	7.30	-57.49	H	80.0
3298.80	-62.90	7.37	-55.54	H	78.0
4123.50	-60.19	8.02	-52.17	H	74.6

Table 6-14. Radiated Spurious Data with WCP (Band 5/26 – Low Channel)

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 124 of 142

OPERATING FREQUENCY: 1712.50 MHz
 CHANNEL: 19975
 MEASURED OUTPUT POWER: 22.39 dBm = 0.173 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 35.39 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3425.00	-59.62	9.68	-49.93	H	72.3
5137.50	-59.80	10.68	-49.12	H	71.5
6850.00	-58.68	11.74	-46.94	H	69.3
8562.50	-53.74	11.05	-42.69	H	65.1

Table 6-15. Radiated Spurious Data (Band 4 – Low Channel)

OPERATING FREQUENCY: 1732.50 MHz
 CHANNEL: 20175
 MEASURED OUTPUT POWER: 22.19 dBm = 0.165 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 35.19 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3465.00	-60.26	9.71	-50.55	H	72.7
5197.50	-59.80	10.59	-49.21	H	71.4
6930.00	-58.64	11.75	-46.89	H	69.1
8662.50	-54.20	11.06	-43.13	H	65.3

Table 6-16. Radiated Spurious Data (Band 4 – Mid Channel)

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 125 of 142

OPERATING FREQUENCY: 1752.50 MHz
 CHANNEL: 20375
 MEASURED OUTPUT POWER: 21.52 dBm = 0.142 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.52 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3505.00	-57.22	9.73	-47.49	H	69.0
5257.50	-59.29	10.64	-48.65	H	70.2
7010.00	-58.96	11.75	-47.21	H	68.7

Table 6-17. Radiated Spurious Data (Band 4 – High Channel)

OPERATING FREQUENCY: 1712.50 MHz
 CHANNEL: 19975
 MEASURED OUTPUT POWER: 22.39 dBm = 0.173 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 35.39 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3425.00	-65.96	9.68	-56.27	H	78.7
5137.50	-62.68	10.68	-52.00	H	74.4
6850.00	-61.58	11.74	-49.84	H	72.2

Table 6-18. Radiated Spurious Data with WCP (Band 4 – Low Channel)

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 126 of 142

OPERATING FREQUENCY: 1860.00 MHz
 CHANNEL: 26140
 MEASURED OUTPUT POWER: 21.36 dBm = 0.137 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.36 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3720.00	-58.97	9.39	-49.59	H	70.9
5580.00	-58.43	10.85	-47.57	H	68.9
7440.00	-53.67	10.79	-42.88	H	64.2
9300.00	-53.72	11.60	-42.12	H	63.5

Table 6-19. Radiated Spurious Data (Band 25/2 – Low Channel)

OPERATING FREQUENCY: 1882.50 MHz
 CHANNEL: 26365
 MEASURED OUTPUT POWER: 23.03 dBm = 0.201 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 36.03 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3765.00	-61.66	9.27	-52.39	H	75.4
5647.50	-58.15	11.06	-47.09	H	70.1
7530.00	-55.89	10.99	-44.90	H	67.9
9412.50	-54.10	11.55	-42.55	H	65.6

Table 6-20. Radiated Spurious Data (Band 25/2 – Mid Channel)

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 127 of 142

OPERATING FREQUENCY: 1905.00 MHz
 CHANNEL: 26590
 MEASURED OUTPUT POWER: 20.24 dBm = 0.106 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 33.24 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3810.00	-56.20	9.19	-47.02	H	67.3
5715.00	-58.19	11.26	-46.93	H	67.2
7620.00	-56.39	11.16	-45.23	H	65.5
9525.00	-52.66	11.76	-40.90	H	61.1

Table 6-21. Radiated Spurious Data (Band 25/2 – High Channel)

OPERATING FREQUENCY: 1882.50 MHz
 CHANNEL: 26365
 MEASURED OUTPUT POWER: 23.03 dBm = 0.201 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 36.03 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3765.00	-63.28	9.27	-54.01	H	77.0
5647.50	-62.35	11.06	-51.29	H	74.3
7530.00	-59.78	10.99	-48.79	H	71.8

Table 6-22. Radiated Spurious Data with WCP (Band 25/2 – Mid Channel)

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 128 of 142

OPERATING FREQUENCY: 2498.50 MHz
 CHANNEL: 39675
 MEASURED OUTPUT POWER: 18.54 dBm = 0.071 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10} (W) =$ 43.54 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
4997.00	-47.66	10.93	-36.73	V	55.3
7495.50	-57.39	10.92	-46.47	V	65.0

Table 6-23. Radiated Spurious Data (Band 41 – Low Channel)

OPERATING FREQUENCY: 2593.00 MHz
 CHANNEL: 40620
 MEASURED OUTPUT POWER: 19.31 dBm = 0.085 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10} (W) =$ 44.31 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
5186.00	-44.32	10.60	-33.72	V	53.0
7779.00	-53.34	11.22	-42.12	V	61.4
10372.00	-54.07	12.36	-41.71	V	61.0
12965.00	-52.75	13.16	-39.59	V	58.9

Table 6-24. Radiated Spurious Data (Band 41 – Mid Channel)

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 129 of 142

OPERATING FREQUENCY: 2687.50 MHz
 CHANNEL: 41565
 MEASURED OUTPUT POWER: 18.13 dBm = 0.065 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ 43.13 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
5375.00	-49.58	10.58	-39.00	V	57.1
8062.50	-56.08	11.10	-44.98	V	63.1
10750.00	-55.64	12.60	-43.05	V	61.2
13437.50	-51.88	12.38	-39.50	V	57.6

Table 6-25. Radiated Spurious Data (Band 41 – High Channel)

OPERATING FREQUENCY: 2593.00 MHz
 CHANNEL: 40620
 MEASURED OUTPUT POWER: 19.31 dBm = 0.085 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ 44.31 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
5186.00	-50.52	10.60	-39.92	H	59.2
7779.00	-56.98	11.22	-45.76	H	65.1
10372.00	-56.68	12.36	-44.32	H	63.6

Table 6-26. Radiated Spurious Data with WCP (Band 41 – Mid Channel)

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 130 of 142

6.8 Frequency Stability / Temperature Variation

\$2.1055 \$22.355 \$24.235 \$27.54

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-C-2004

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 131 of 142

Band 12 Frequency Stability Measurements

§2.1055 §27.54

OPERATING FREQUENCY: 707,500,000 Hz
 CHANNEL: 23790
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	707,499,888	-112	-0.0000158
100 %		- 30	707,499,775	-225	-0.0000318
100 %		- 20	707,499,700	-300	-0.0000424
100 %		- 10	707,499,705	-295	-0.0000417
100 %		0	707,500,162	162	0.0000229
100 %		+ 10	707,499,849	-151	-0.0000213
100 %		+ 20	707,500,014	14	0.0000020
100 %		+ 30	707,499,834	-166	-0.0000235
100 %		+ 40	707,500,252	252	0.0000356
100 %		+ 50	707,500,111	111	0.0000157
BATT. ENDPOINT	3.45	+ 20	707,499,807	-193	-0.0000273

Table 6-27. Frequency Stability Data (Band 12)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 132 of 142

Band 12 Frequency Stability Measurements

§2.1055 §27.54

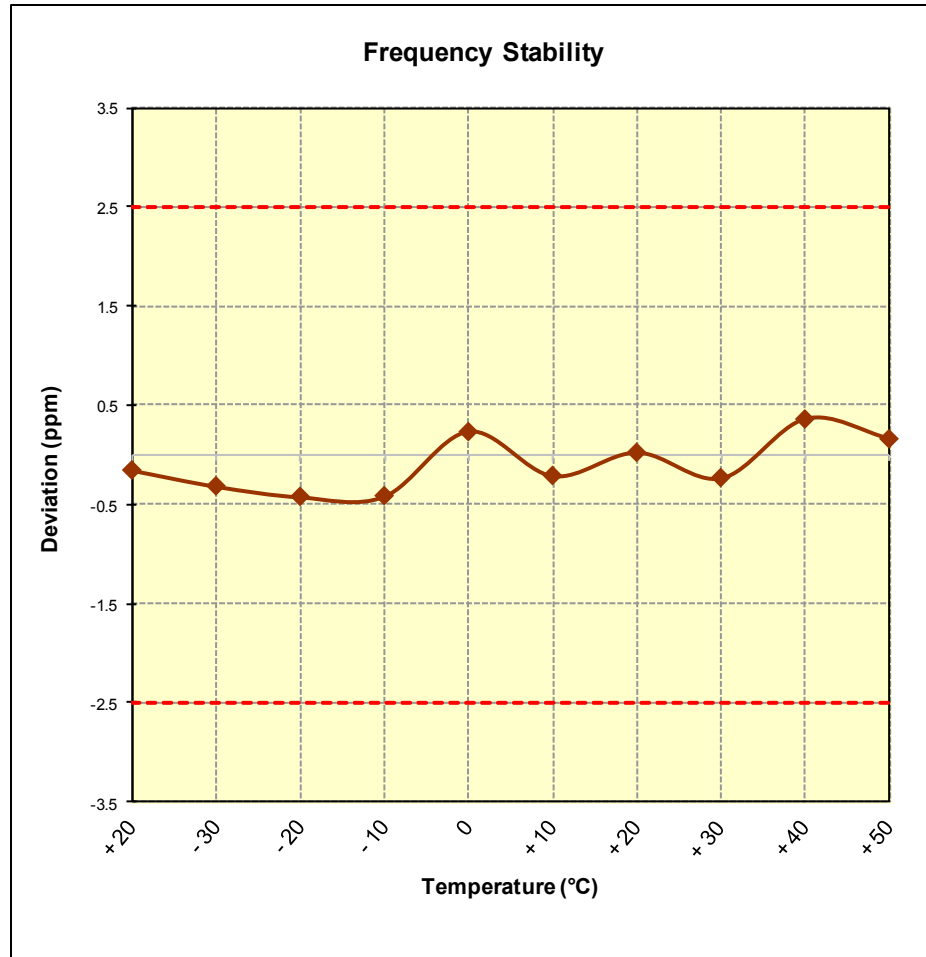


Figure 6-7. Frequency Stability Graph (Band 12)

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset	Page 133 of 142	

Band 26 Frequency Stability Measurements

\$2.1055 \$22.355

OPERATING FREQUENCY: 831,500,000 Hz
 CHANNEL: 26865
 REFERENCE VOLTAGE: 3.85 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	831,499,788	-212	-0.0000255
100 %		- 30	831,499,531	-469	-0.0000564
100 %		- 20	831,499,602	-398	-0.0000479
100 %		- 10	831,499,711	-289	-0.0000348
100 %		0	831,499,805	-195	-0.0000235
100 %		+ 10	831,500,112	112	0.0000135
100 %		+ 20	831,500,000	0	0.0000000
100 %		+ 30	831,500,052	52	0.0000063
100 %		+ 40	831,500,032	32	0.0000038
100 %		+ 50	831,499,992	-8	-0.0000010
BATT. ENDPOINT	3.45	+ 20	831,499,837	-163	-0.0000196

Table 6-28. Frequency Stability Data (Band 5/26)

Band 26 Frequency Stability Measurements

§2.1055 §22.355

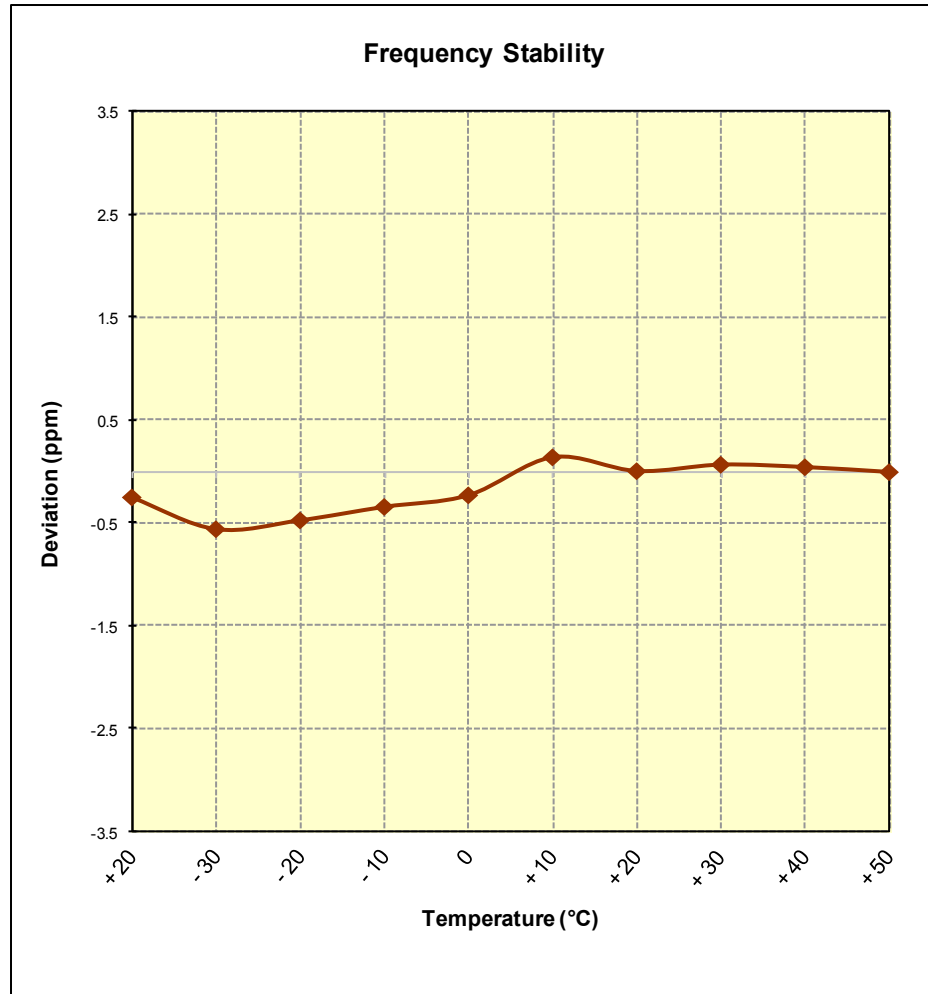


Figure 6-8. Frequency Stability Graph (Band 26)

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 135 of 142

Band 4 Frequency Stability Measurements

§2.1055 §§27.54

OPERATING FREQUENCY: 1,732,500,000 Hz
 CHANNEL: 20175
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,732,500,104	104	0.0000060
100 %		- 30	1,732,500,279	279	0.0000161
100 %		- 20	1,732,500,128	128	0.0000074
100 %		- 10	1,732,500,196	196	0.0000113
100 %		0	1,732,500,047	47	0.0000027
100 %		+ 10	1,732,500,251	251	0.0000145
100 %		+ 20	1,732,500,085	85	0.0000049
100 %		+ 30	1,732,500,368	368	0.0000212
100 %		+ 40	1,732,500,467	467	0.0000270
100 %		+ 50	1,732,500,093	93	0.0000054
BATT. ENDPOINT	3.45	+ 20	1,732,500,128	128	0.0000074

Table 6-29. Frequency Stability Data (Band 4)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset	Page 136 of 142	

Band 4 Frequency Stability Measurements

§2.1055 §§27.54

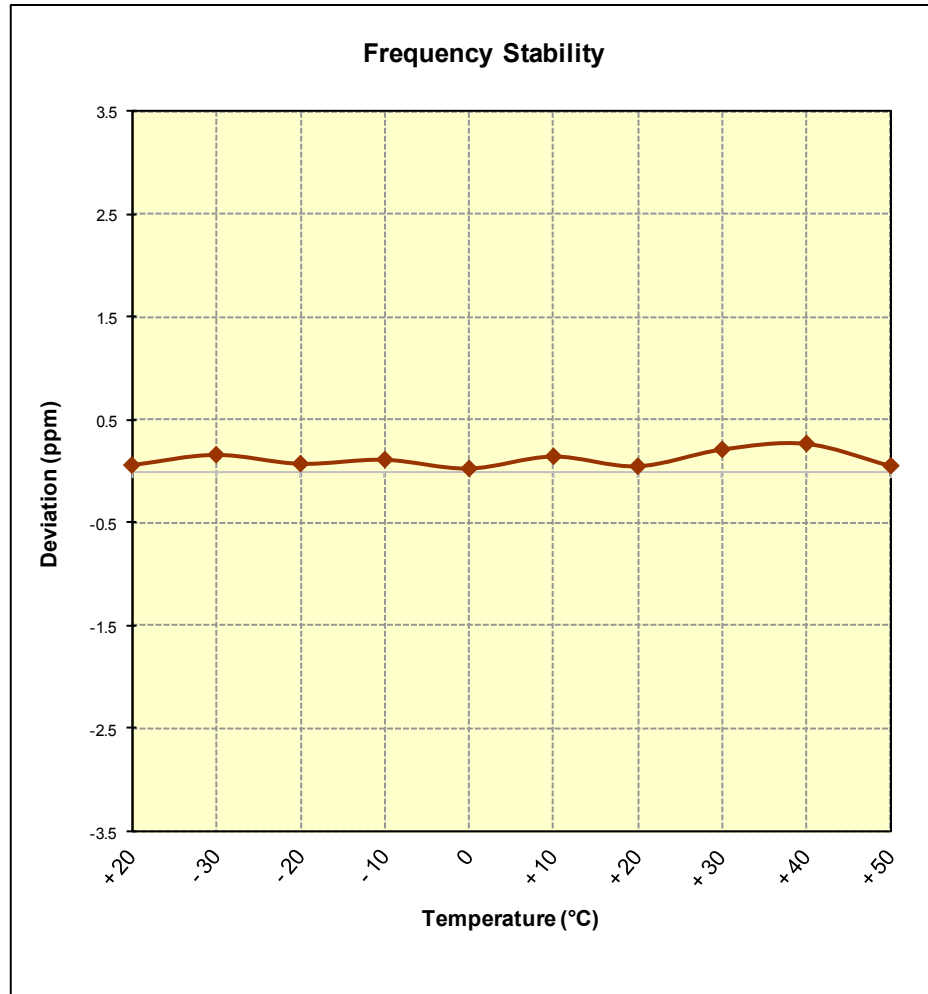


Figure 6-9. Frequency Stability Graph (Band 4)

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 137 of 142

Band 25/2 Frequency Stability Measurements

§2.1055 §24.235

OPERATING FREQUENCY: 1,882,500,000 Hz
 CHANNEL: 26365
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,882,499,864	-136	-0.0000072
100 %		- 30	1,882,499,851	-149	-0.0000079
100 %		- 20	1,882,499,963	-37	-0.0000020
100 %		- 10	1,882,500,003	3	0.0000002
100 %		0	1,882,500,244	244	0.0000130
100 %		+ 10	1,882,500,356	356	0.0000189
100 %		+ 20	1,882,500,031	31	0.0000016
100 %		+ 30	1,882,499,919	-81	-0.0000043
100 %		+ 40	1,882,500,139	139	0.0000074
100 %		+ 50	1,882,499,817	-183	-0.0000097
BATT. ENDPOINT	3.45	+ 20	1,882,500,027	27	0.0000014

Table 6-30. Frequency Stability Data (Band 25/2)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset	Page 138 of 142	

Band 25/2 Frequency Stability Measurements
§2.1055 §24.235

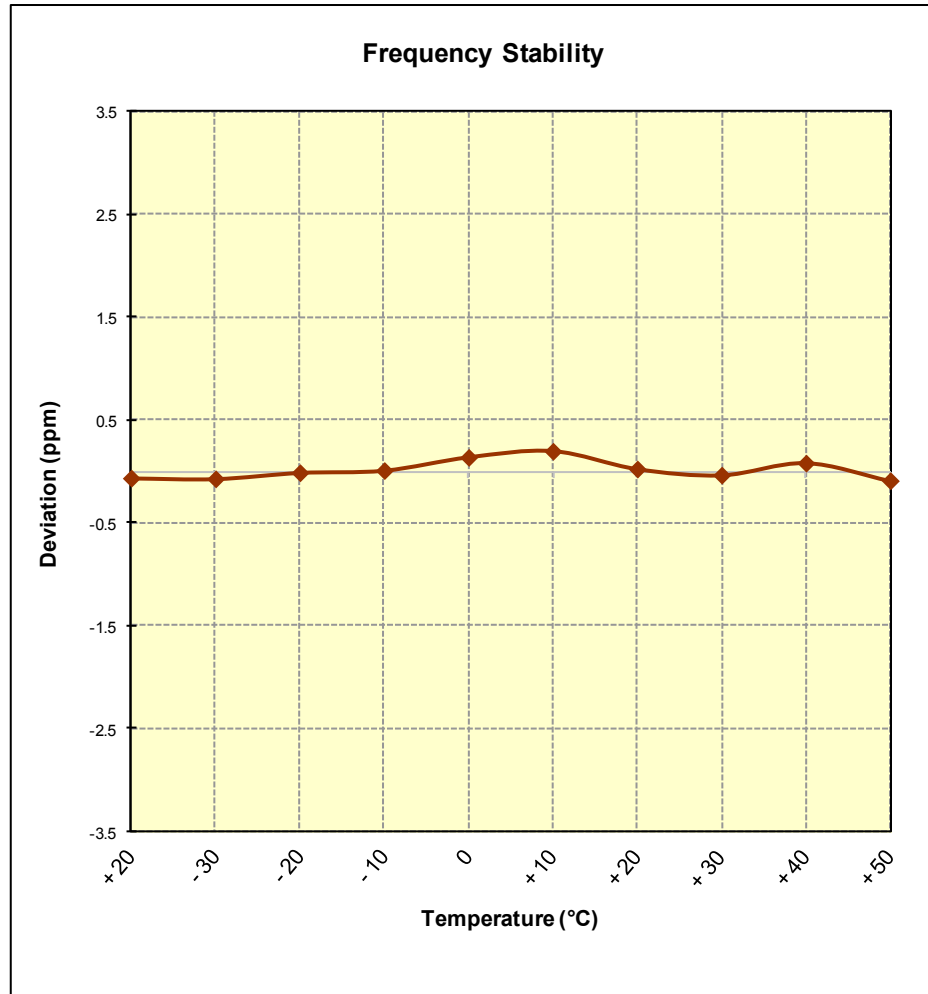


Figure 6-10. Frequency Stability Graph (Band 25/2)

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 139 of 142

Band 41 Frequency Stability Measurements

§2.1055 §27.54

OPERATING FREQUENCY: 2,593,000,000 Hz
 CHANNEL: 40620
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	2,593,000,389	389	0.0000150
100 %		- 30	2,593,000,124	124	0.0000048
100 %		- 20	2,592,999,879	-121	-0.0000047
100 %		- 10	2,592,999,851	-149	-0.0000057
100 %		0	2,592,999,873	-127	-0.0000049
100 %		+ 10	2,592,999,987	-13	-0.0000005
100 %		+ 20	2,592,999,926	-74	-0.0000029
100 %		+ 30	2,592,999,925	-75	-0.0000029
100 %		+ 40	2,593,000,171	171	0.0000066
100 %		+ 50	2,593,000,375	375	0.0000145
BATT. ENDPOINT	3.45	+ 20	2,592,999,963	-37	-0.0000014

Table 6-31. Frequency Stability Data (Band 41)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 140 of 142

Band 41 Frequency Stability Measurements
§2.1055 §27.54

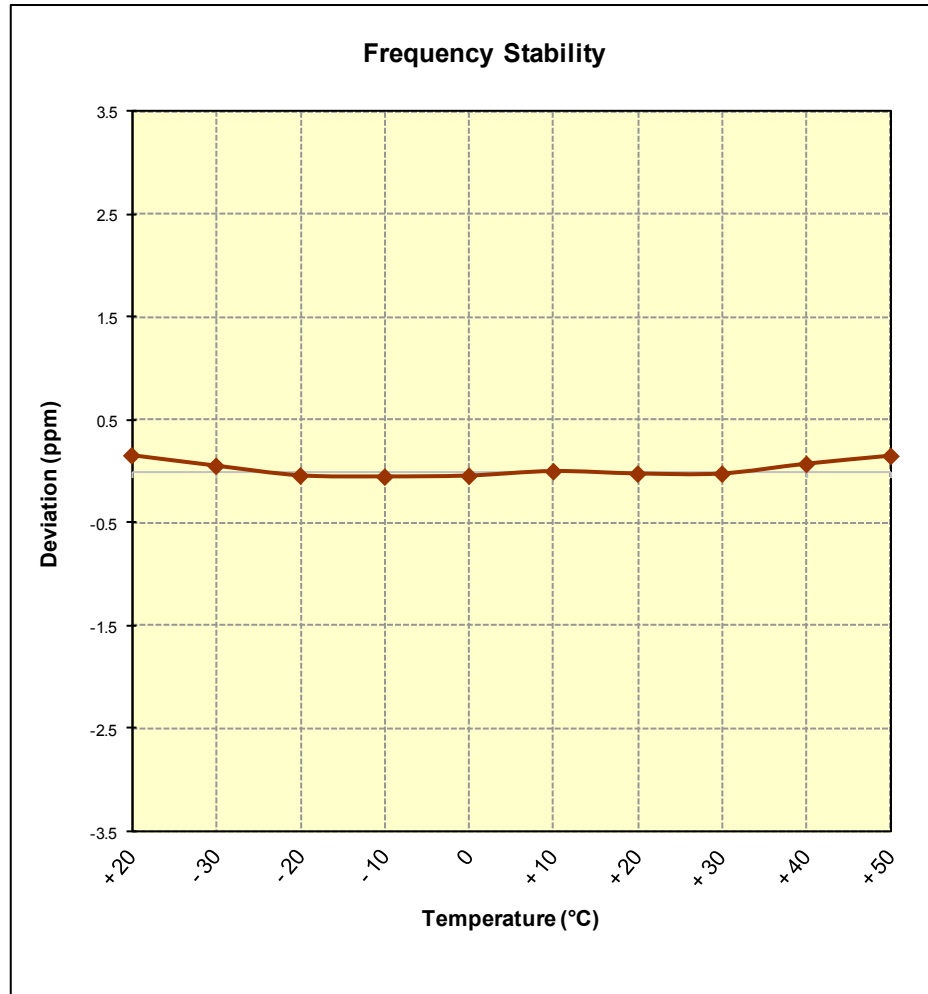


Figure 6-11. Frequency Stability Graph (Band 41)

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 141 of 142

7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMG928P** complies with all the requirements of Parts 22, 24, & 27 of the FCC rules for LTE operation only.

FCC ID: A3LSMG928P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506151232.A3L	Test Dates: 6/19 - 7/1/15	EUT Type: Portable Handset		Page 142 of 142