

7.4 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as noted in the Test Notes on the following page.

Test Procedure Used

KDB 971168 D01 v03 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW $\geq$ 1% of the emission bandwidth
4. VBW $\geq$ 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq$ 2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

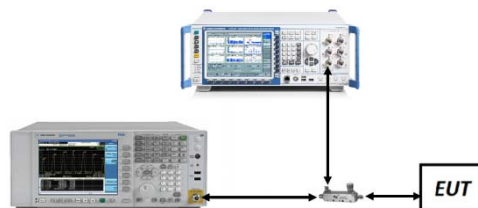


Figure 7-3. Test Instrument & Measurement Setup

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 76 of 167

Test Notes


Per 22.917(b) 24.238(a) 27.53(h) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.


Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz.

FCC ID: A3LSMJ737T		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 77 of 167

Band 71

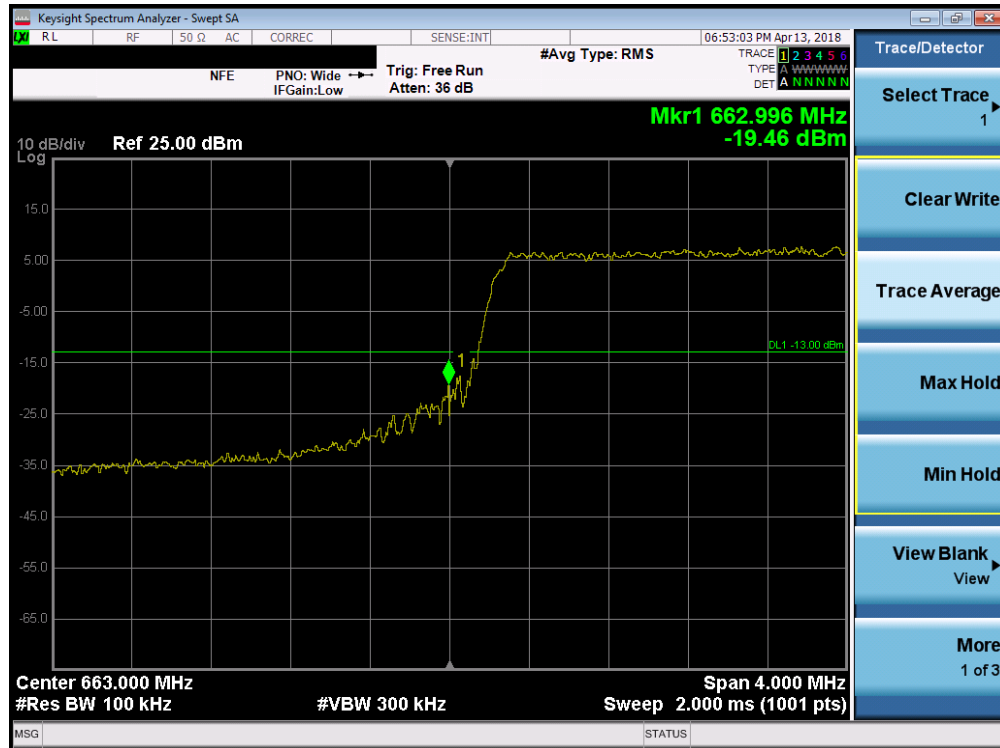


Plot 7-111. Lower Band Edge Plot (Band 71 - 5.0MHz QPSK - Full RB Configuration)

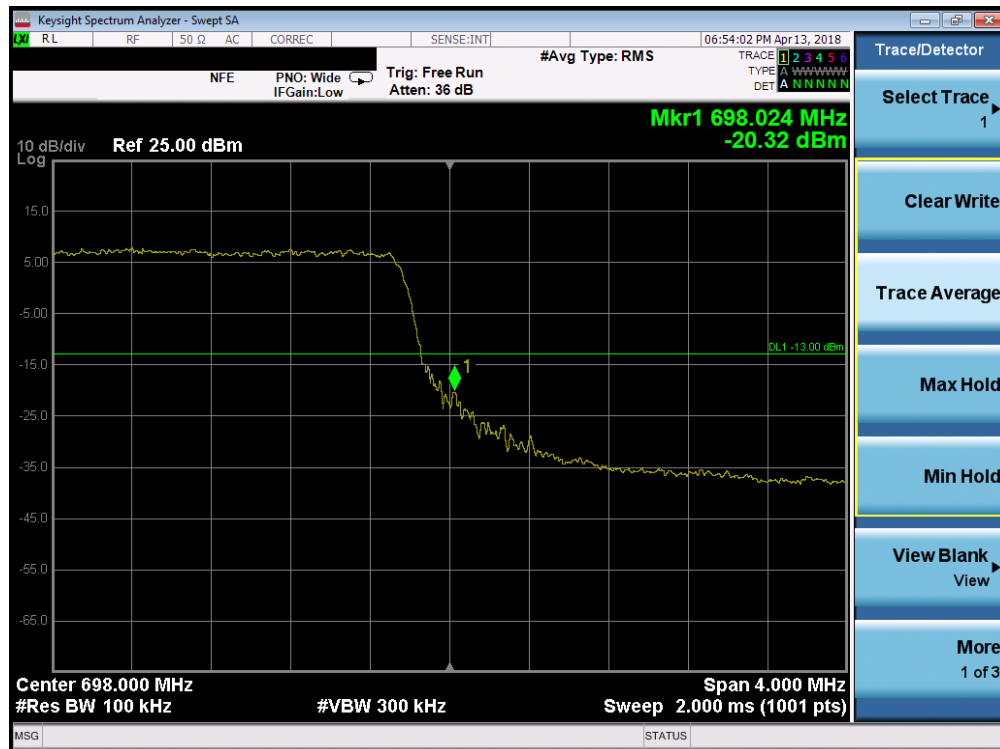

Plot 7-112. Upper Band Edge Plot (Band 71 - 5.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 78 of 167

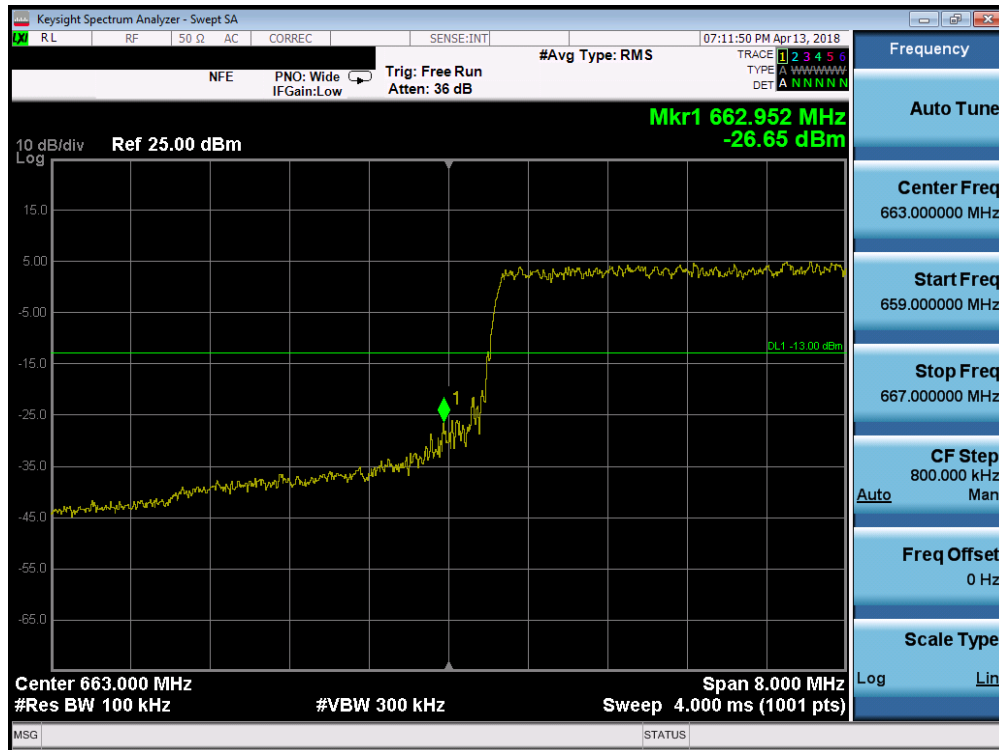


Plot 7-113. Lower Band Edge Plot (Band 71 - 10.0MHz QPSK - Full RB Configuration)



Plot 7-114. Upper Band Edge Plot (Band 71 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 79 of 167

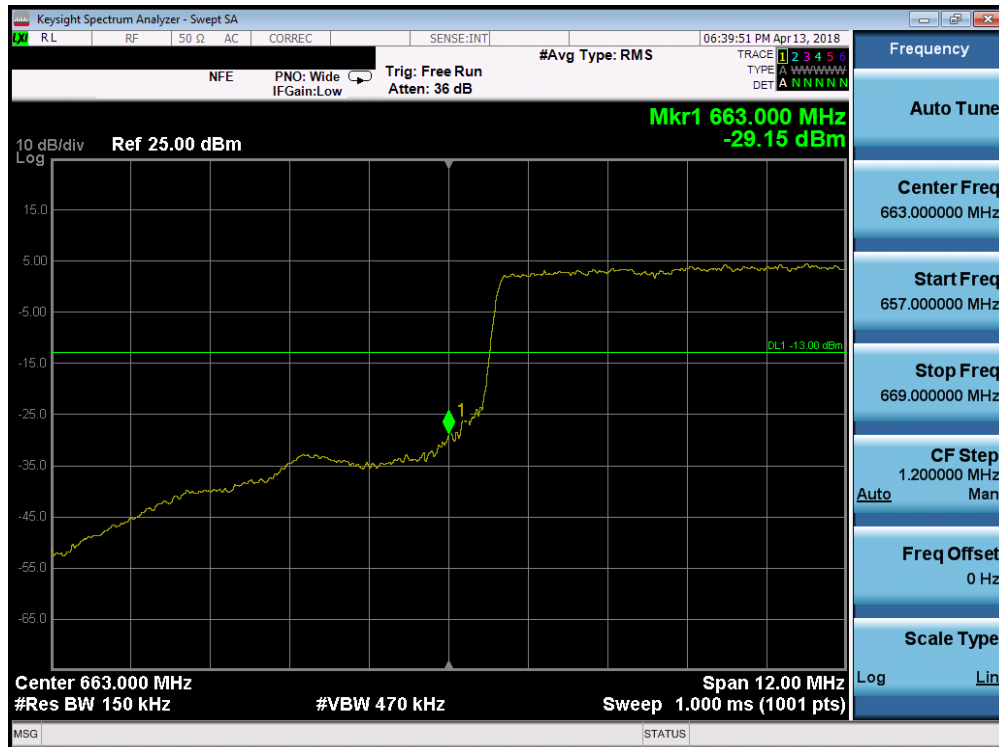


Plot 7-115. Lower Band Edge Plot (Band 71 - 15.0MHz QPSK - Full RB Configuration)




Plot 7-116. Upper Band Edge Plot (Band 71 - 15.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 80 of 167

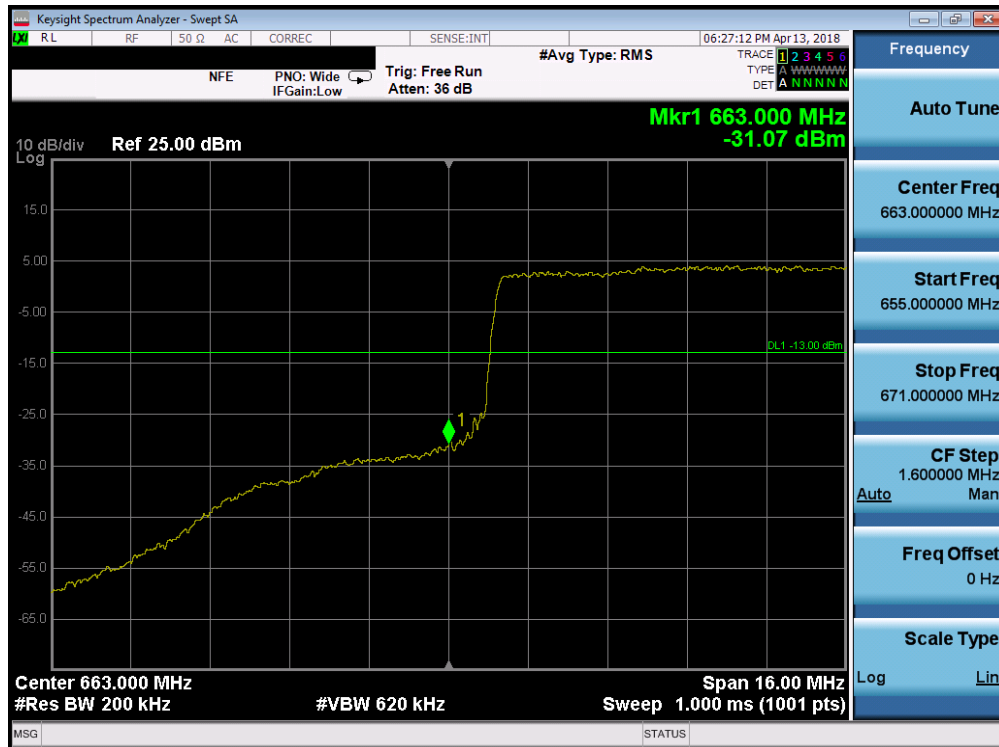

Plot 7-117. Lower Band Edge Plot (Band 71 - 20.0MHz QPSK - Full RB Configuration)

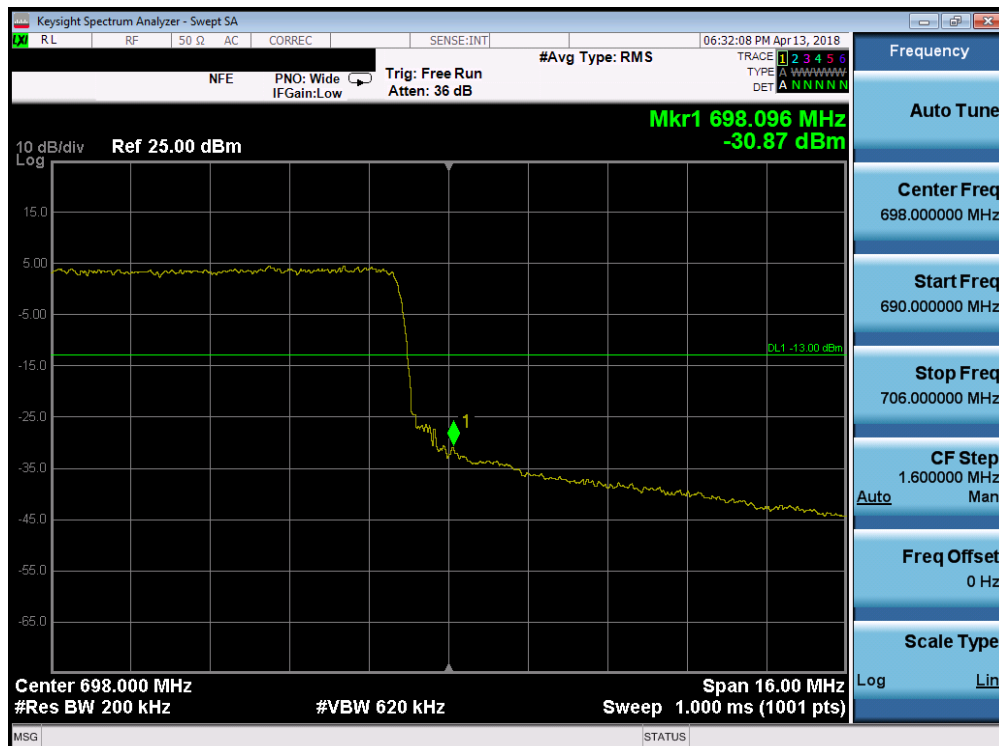

Plot 7-118. Upper Band Edge Plot (Band 71 - 20.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 81 of 167

Band 12




Plot 7-119. Lower Band Edge Plot (Band 12 - 1.4MHz QPSK - Full RB Configuration)



Plot 7-120. Upper Band Edge Plot (Band 12 - 1.4MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 82 of 167

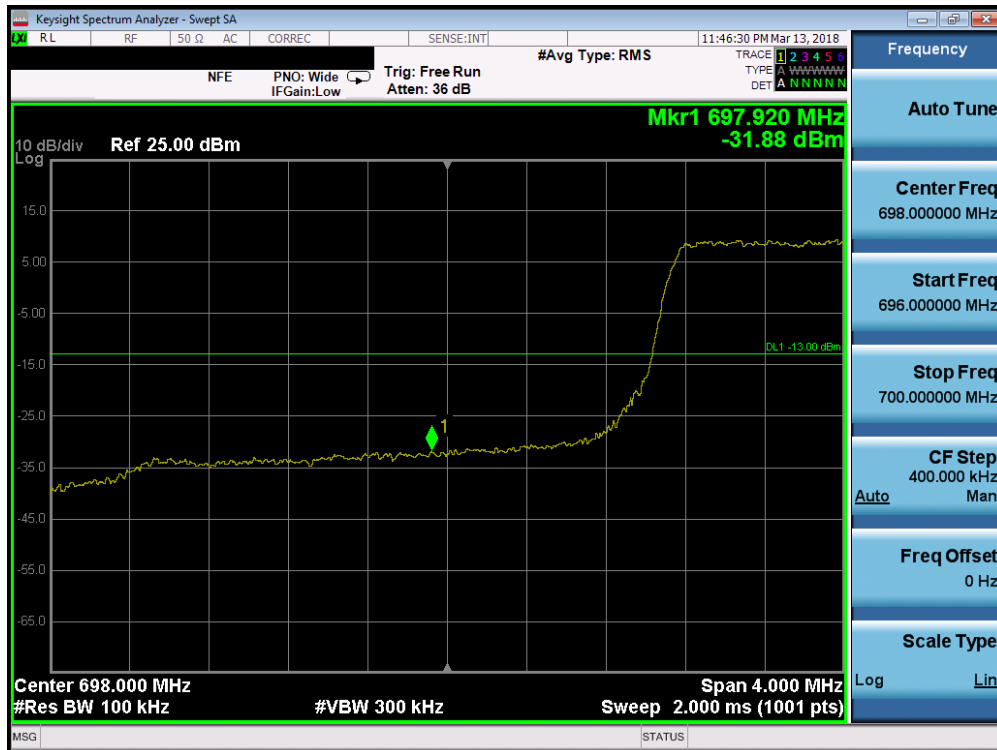


Plot 7-121. Lower Band Edge Plot (Band 12 - 3.0MHz QPSK - Full RB Configuration)



Plot 7-122. Upper Band Edge Plot (Band 12 - 3.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 83 of 167

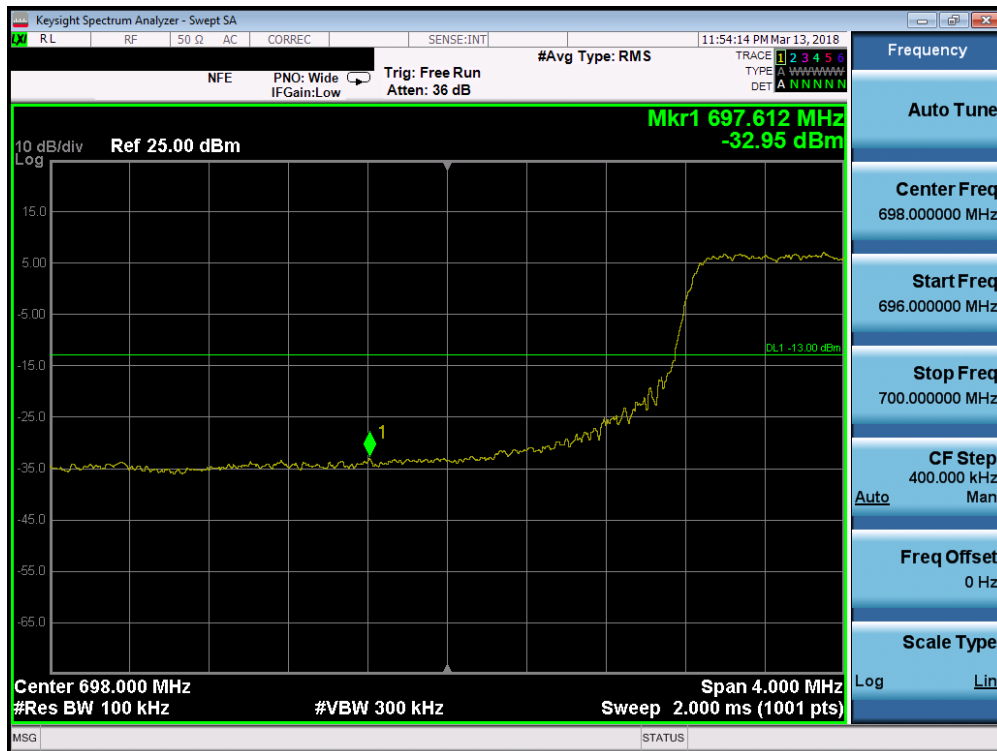


Plot 7-123. Lower Band Edge Plot (Band 12 - 5.0MHz QPSK - Full RB Configuration)



Plot 7-124. Upper Band Edge Plot (Band 12 - 5.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 84 of 167

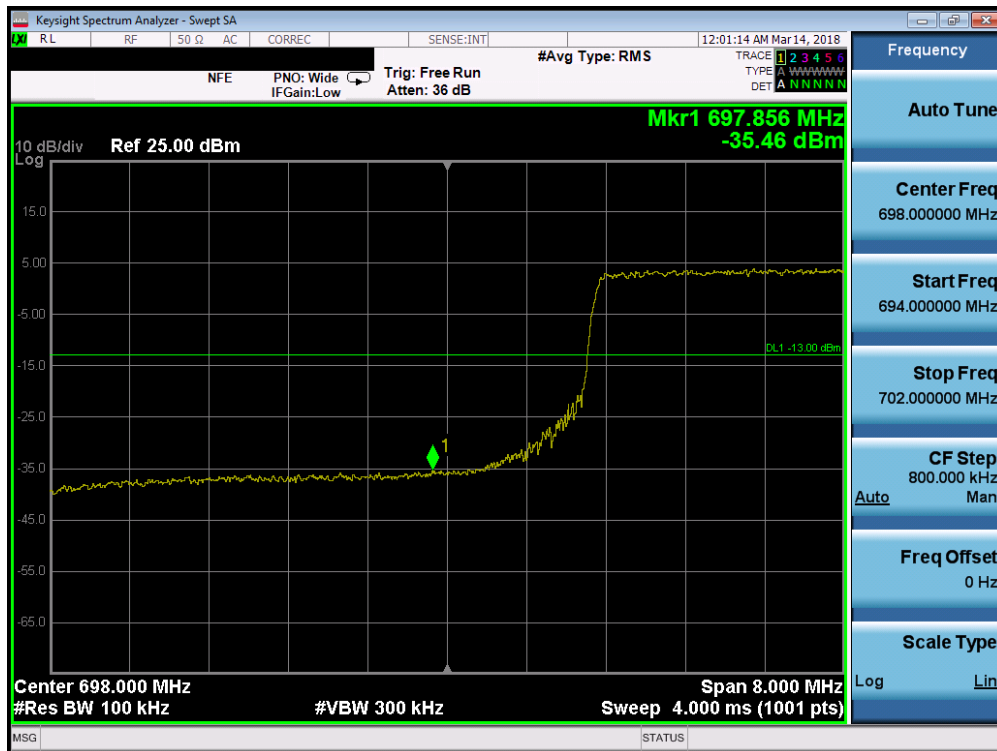

Plot 7-125. Lower Band Edge Plot (Band 12 - 10.0MHz QPSK - Full RB Configuration)




Plot 7-126. Upper Band Edge Plot (Band 12 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 85 of 167

Band 5



Plot 7-127. Lower Band Edge Plot (Band 5 - 1.4MHz QPSK - Full RB Configuration)

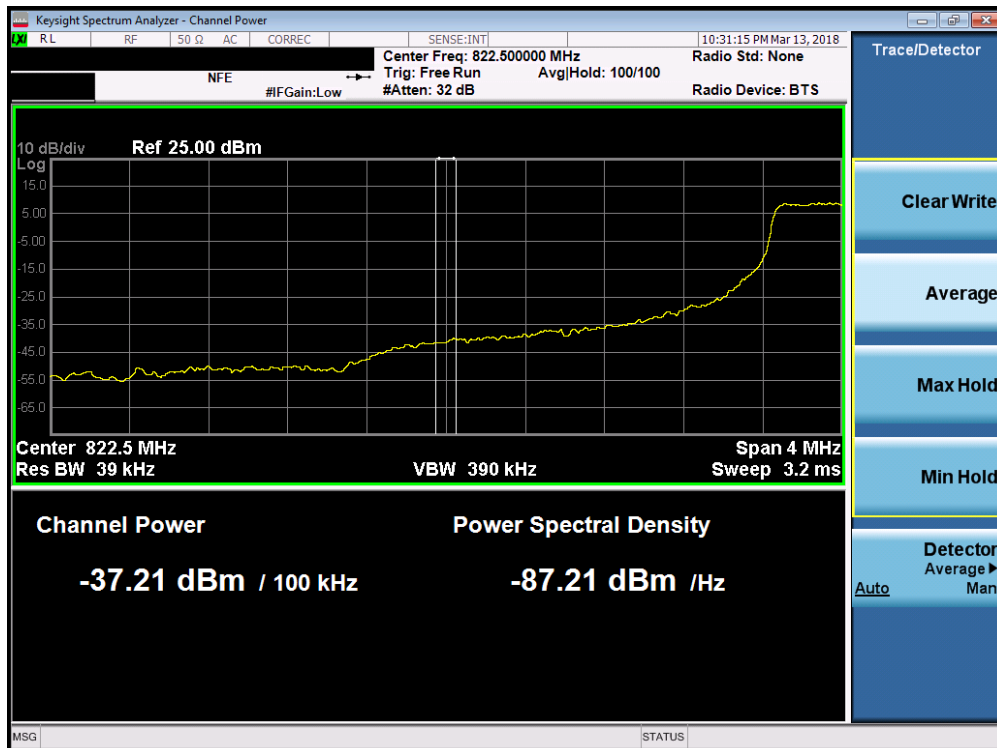


Plot 7-128. Lower Extended Band Edge Plot (Band 5 - 1.4MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 86 of 167




Plot 7-129. Upper Band Edge Plot (Band 5 - 1.4MHz QPSK - Full RB Configuration)

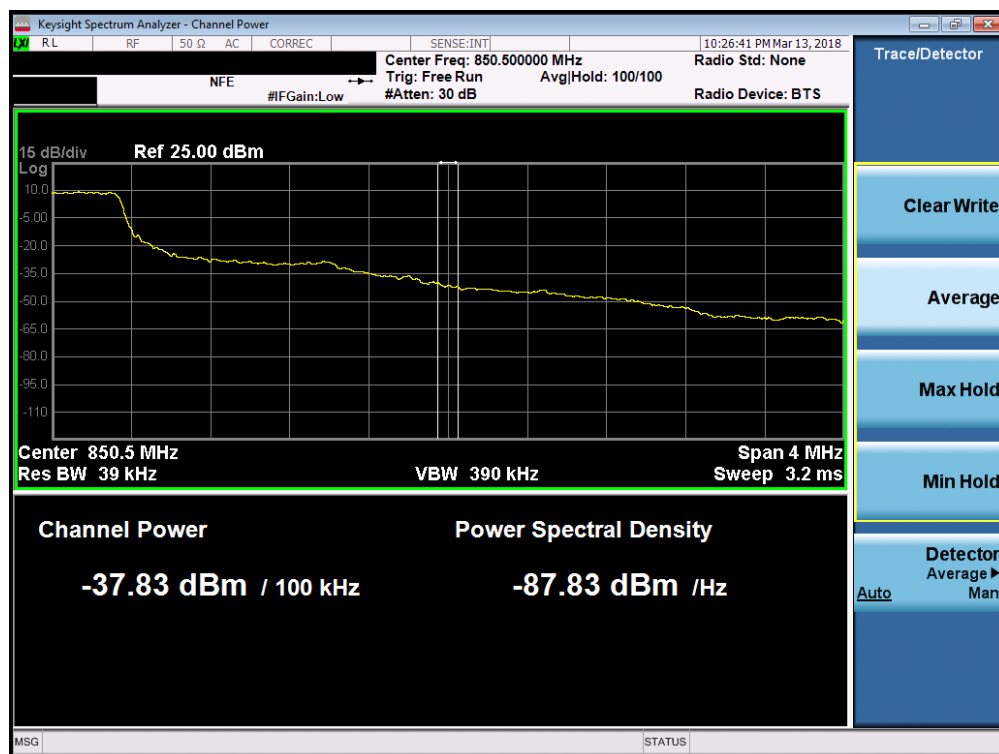

Plot 7-130. Upper Extended Band Edge Plot (Band 5 - 1.4MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 87 of 167

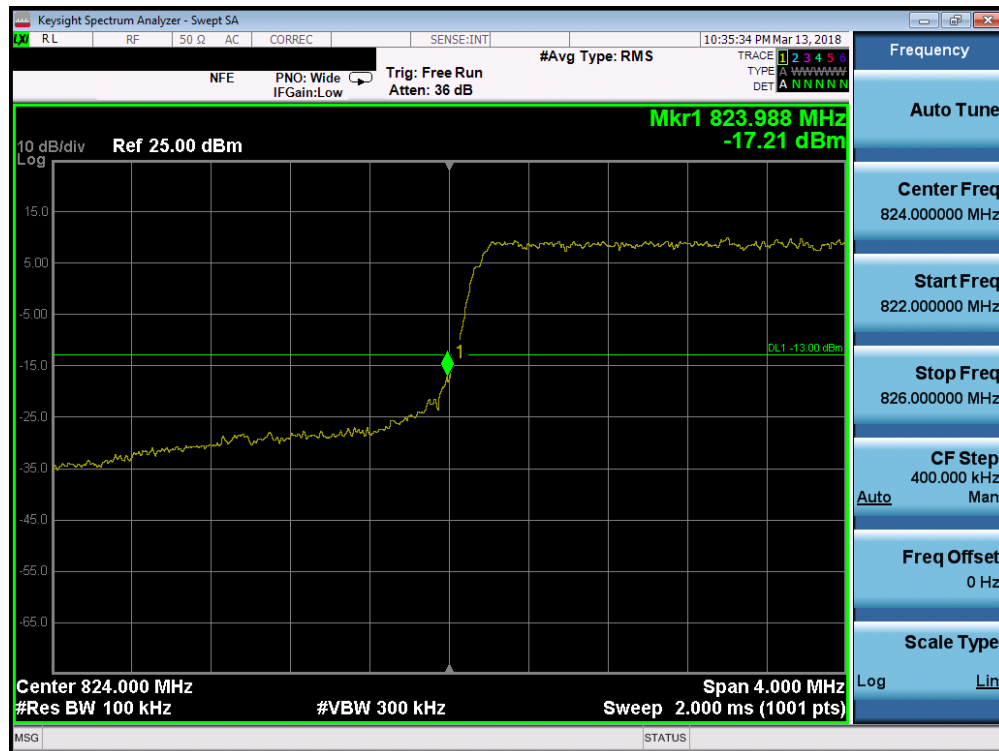


Plot 7-131. Lower Band Edge Plot (Band 5 - 3.0MHz QPSK - Full RB Configuration)



Plot 7-132. Upper Band Edge Plot (Band 5 - 3.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 88 of 167

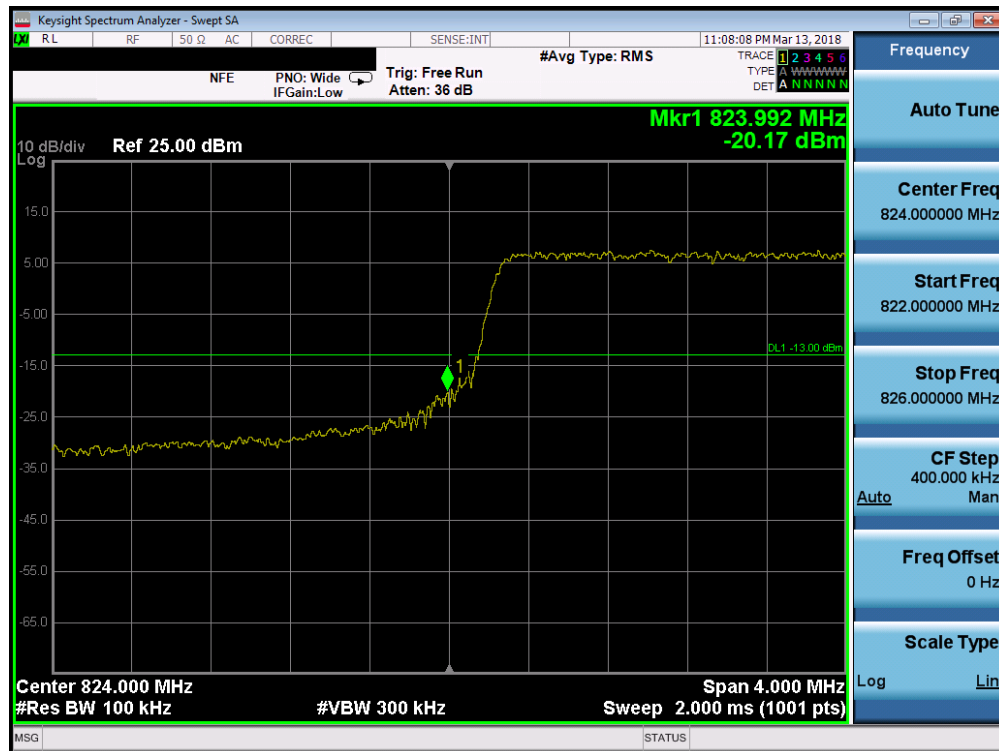


Plot 7-133. Lower Band Edge Plot (Band 5 - 5.0MHz QPSK - Full RB Configuration)



Plot 7-134. Upper Band Edge Plot (Band 5 - 5.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 89 of 167

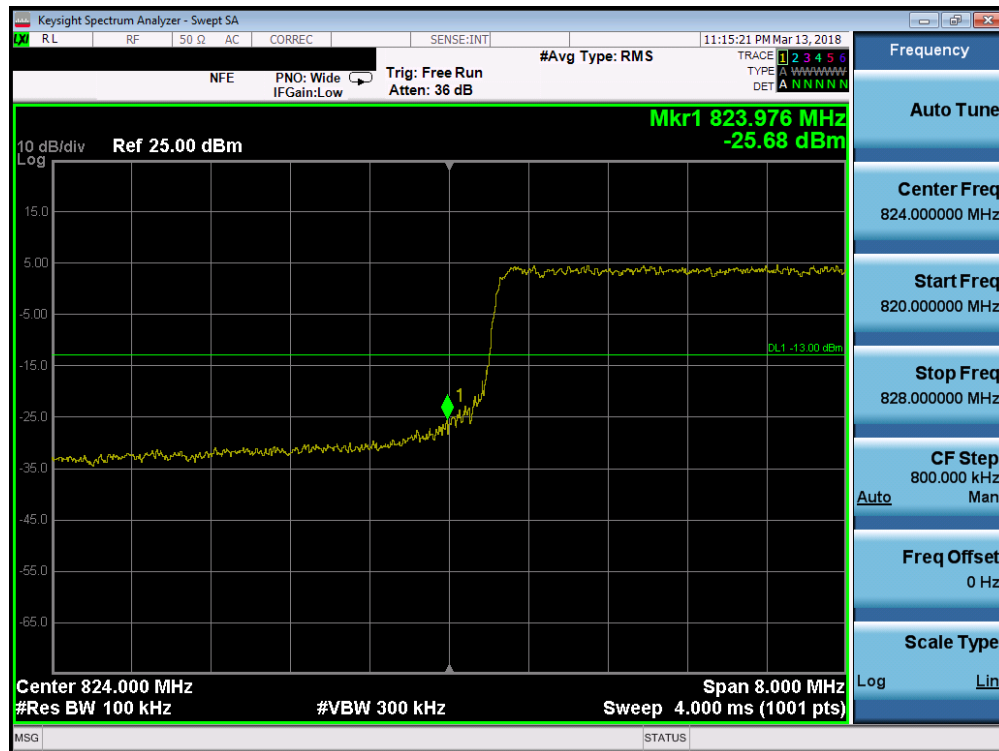


Plot 7-135. Lower Band Edge Plot (Band 5 - 10.0MHz QPSK - Full RB Configuration)



Plot 7-136. Upper Band Edge Plot (Band 5 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 90 of 167	

V 8.0 03/13/2018



Plot 7-139. Upper Band Edge Plot (Band 4 - 1.4MHz QPSK - Full RB Configuration)




Plot 7-140. Upper Extended Band Edge Plot (Band 4 - 1.4MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 92 of 167




Plot 7-141. Upper Band Edge Plot (Band 66 - 1.4MHz QPSK - Full RB Configuration)

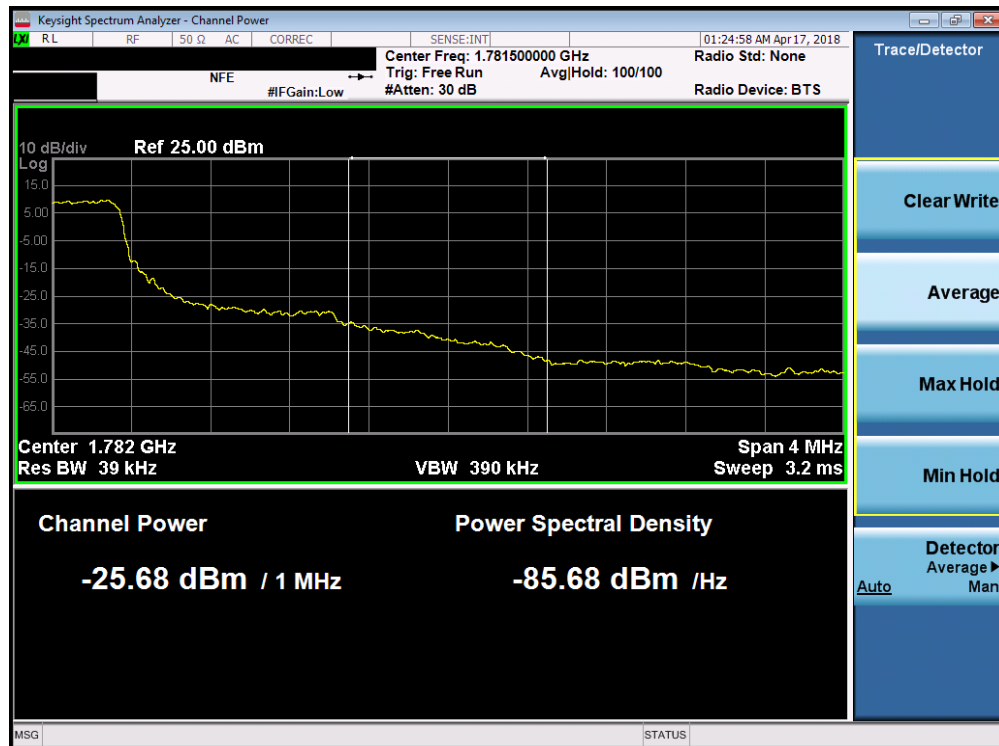


Plot 7-142. Upper Extended Band Edge Plot (Band 66 - 1.4MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 93 of 167

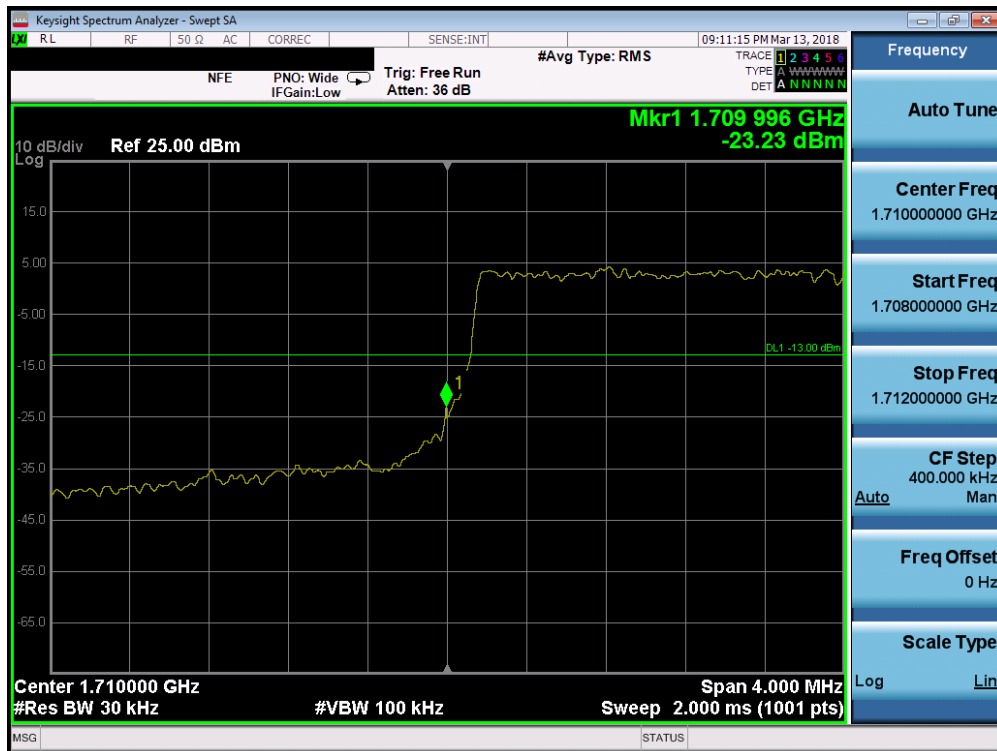

Plot 7-143. Lower Band Edge Plot (Band 66/4 - 3.0MHz QPSK - Full RB Configuration)

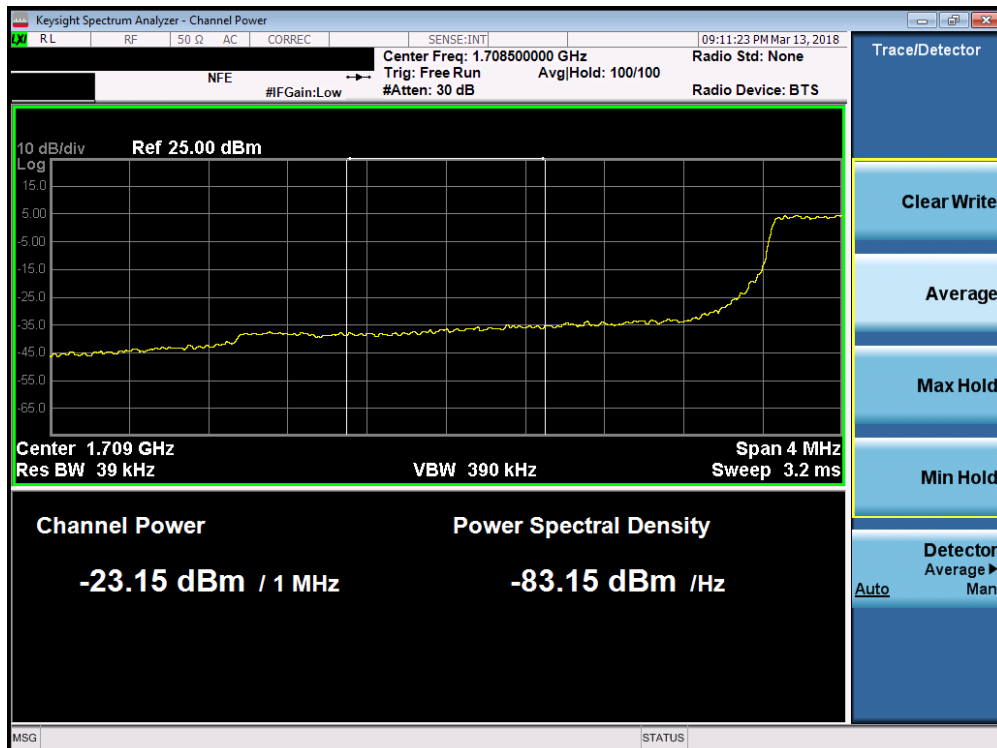


Plot 7-144. Lower Extended Band Edge Plot (Band 66/4 - 3.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 94 of 167




Plot 7-145. Upper Band Edge Plot (Band 4 - 3.0MHz QPSK - Full RB Configuration)

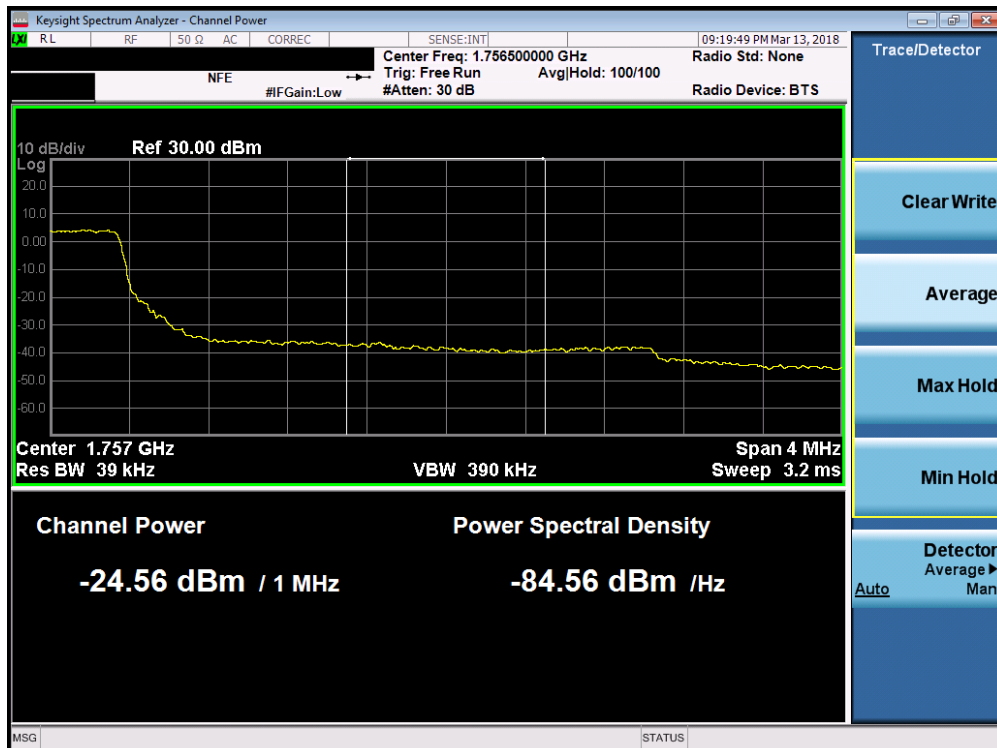


Plot 7-146. Upper Extended Band Edge Plot (Band 4 - 3.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 95 of 167

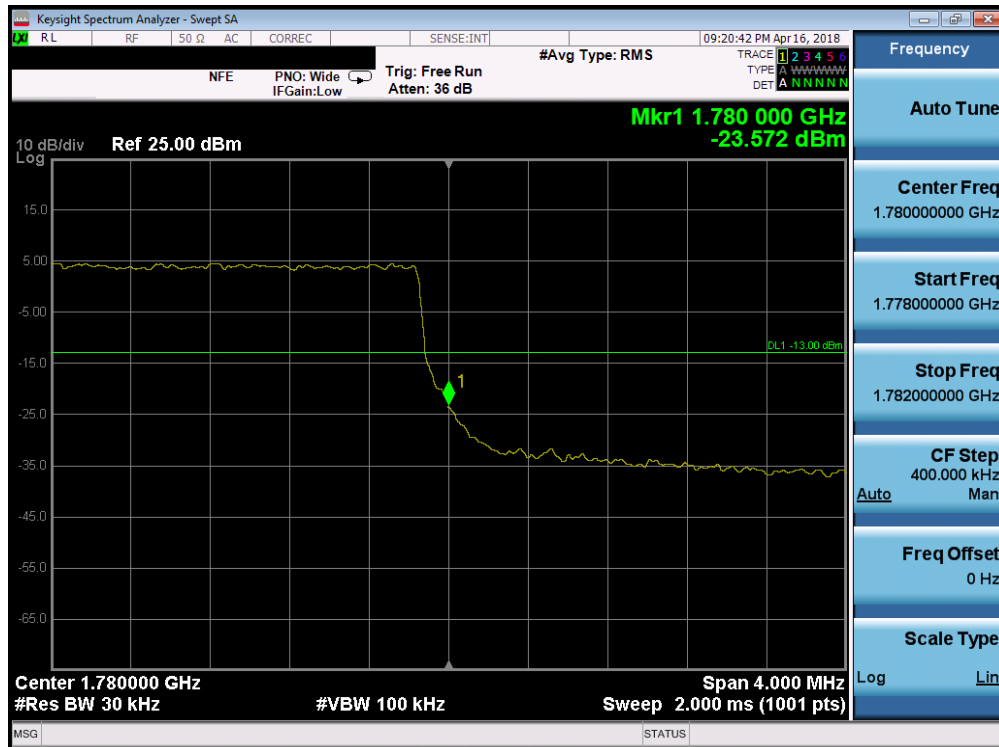


Plot 7-147. Upper Band Edge Plot (Band 66 - 3.0MHz QPSK - Full RB Configuration)

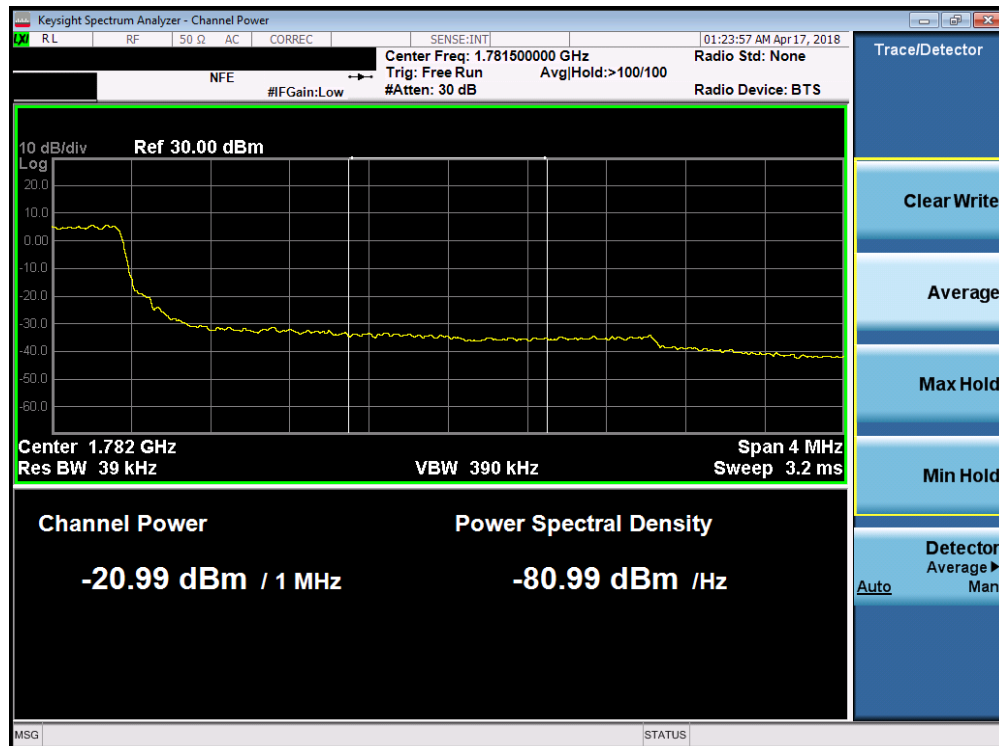


Plot 7-148. Upper Extended Band Edge Plot (Band 66 - 3.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 96 of 167

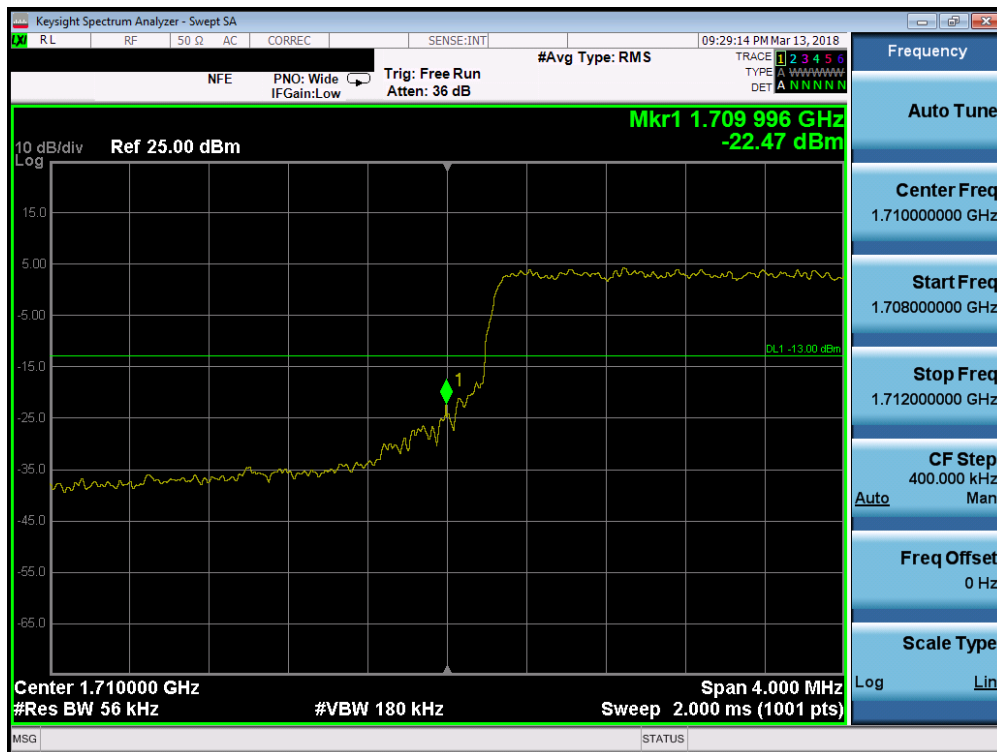

Plot 7-149. Lower Band Edge Plot (Band 66/4 - 5.0MHz QPSK - Full RB Configuration)

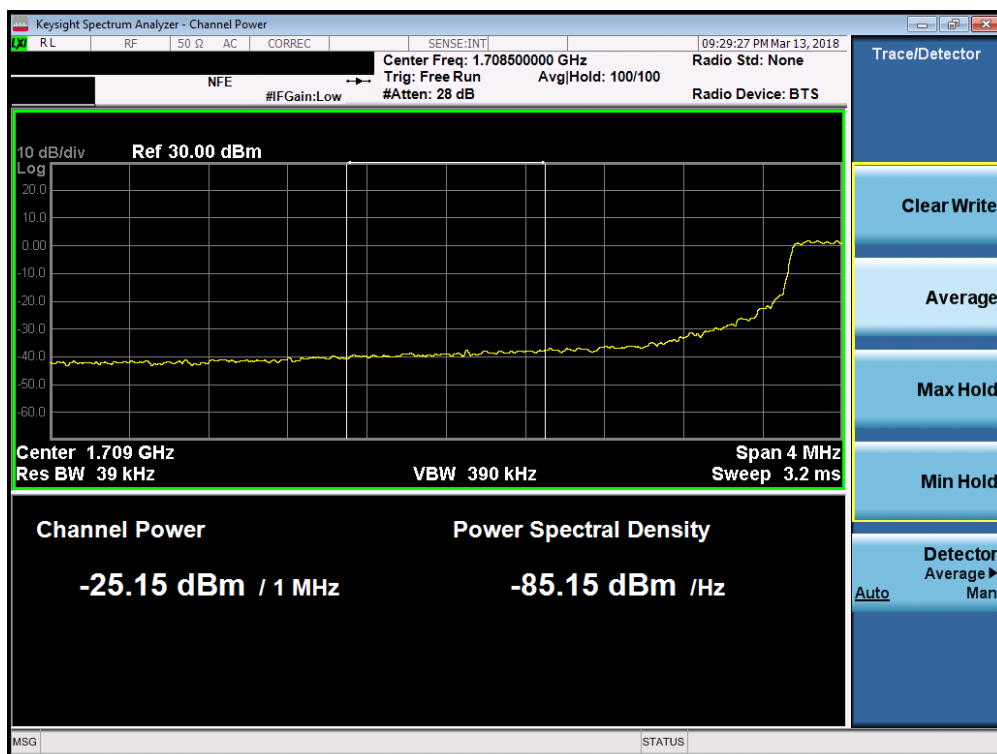


Plot 7-150. Lower Extended Band Edge Plot (Band 66/4 - 5.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 97 of 167




Plot 7-151. Upper Band Edge Plot (Band 4 - 5.0MHz QPSK - Full RB Configuration)

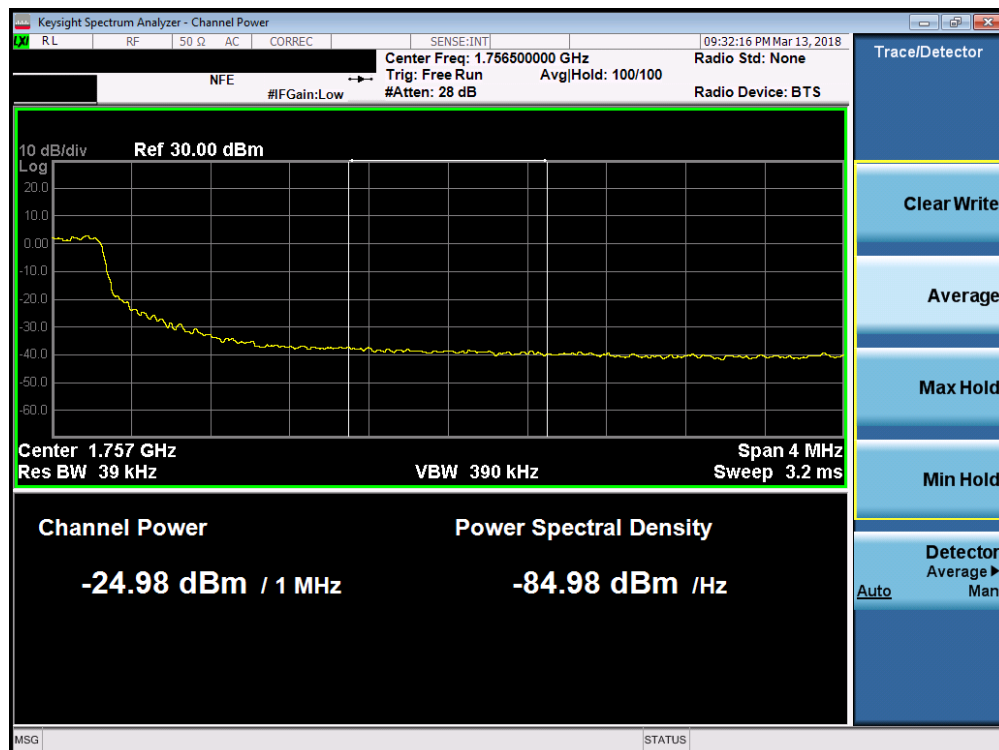


Plot 7-152. Upper Extended Band Edge Plot (Band 4 - 5.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 98 of 167

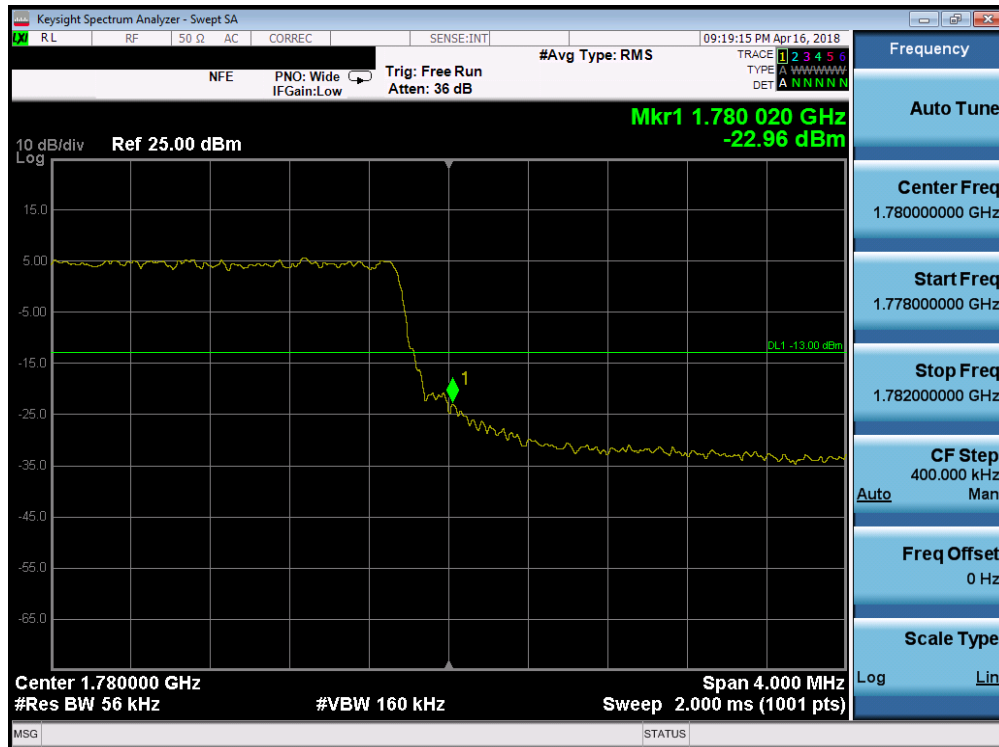


Plot 7-153. Upper Band Edge Plot (Band 66 - 5.0MHz QPSK - Full RB Configuration)

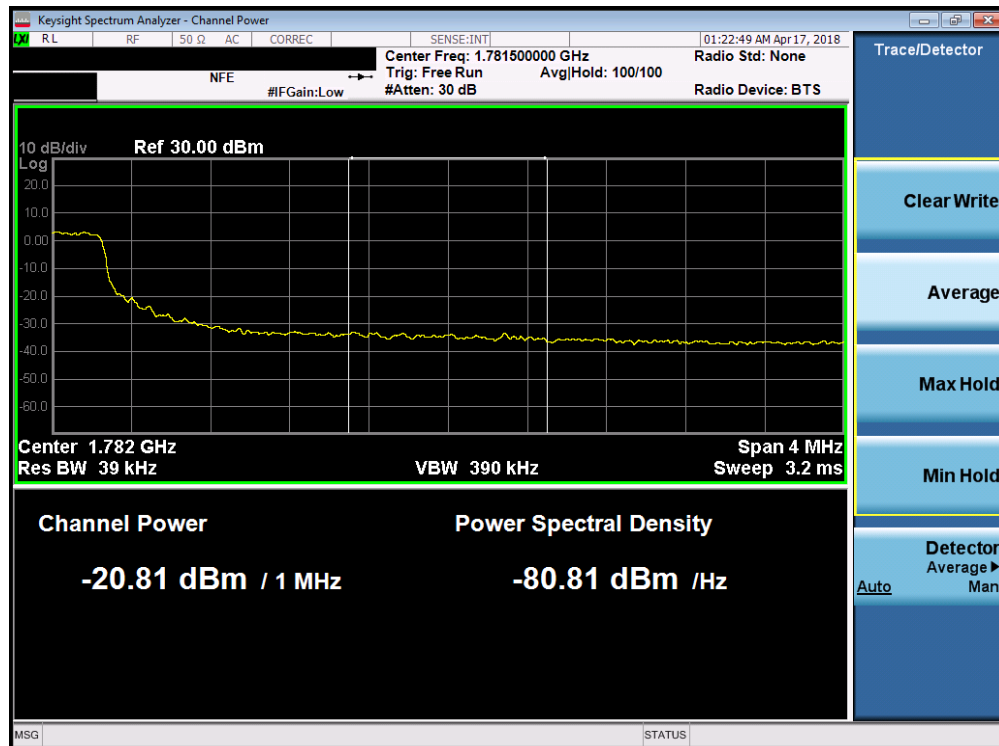


Plot 7-154. Upper Extended Band Edge Plot (Band 66 - 5.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 99 of 167

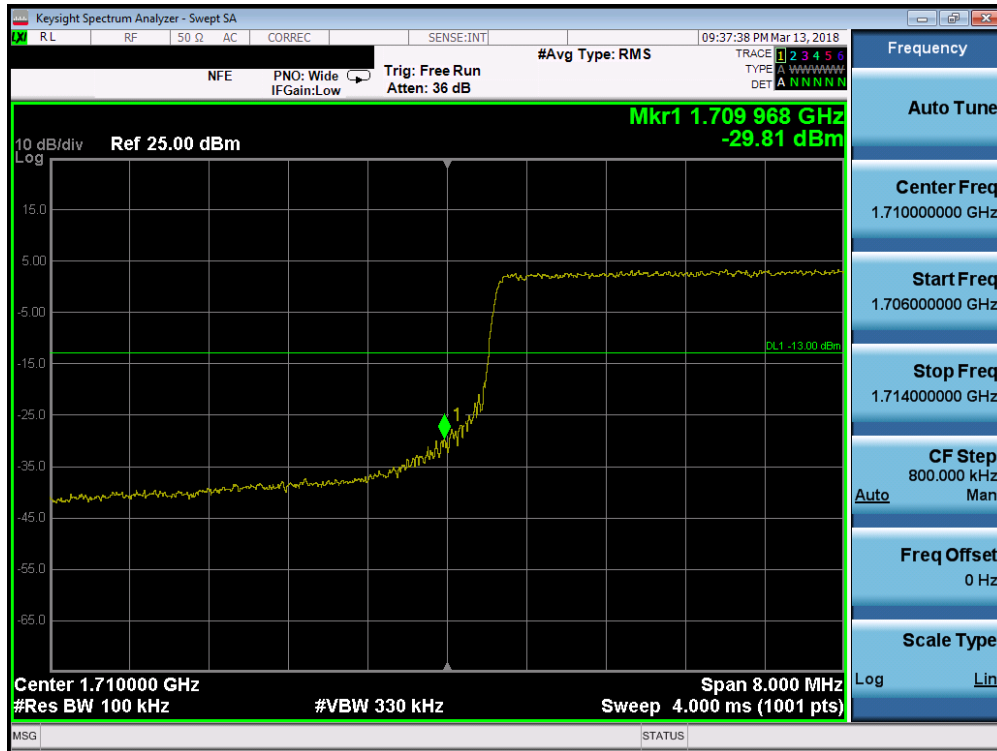

Plot 7-155. Lower Band Edge Plot (Band 66/4 - 10.0MHz QPSK - Full RB Configuration)

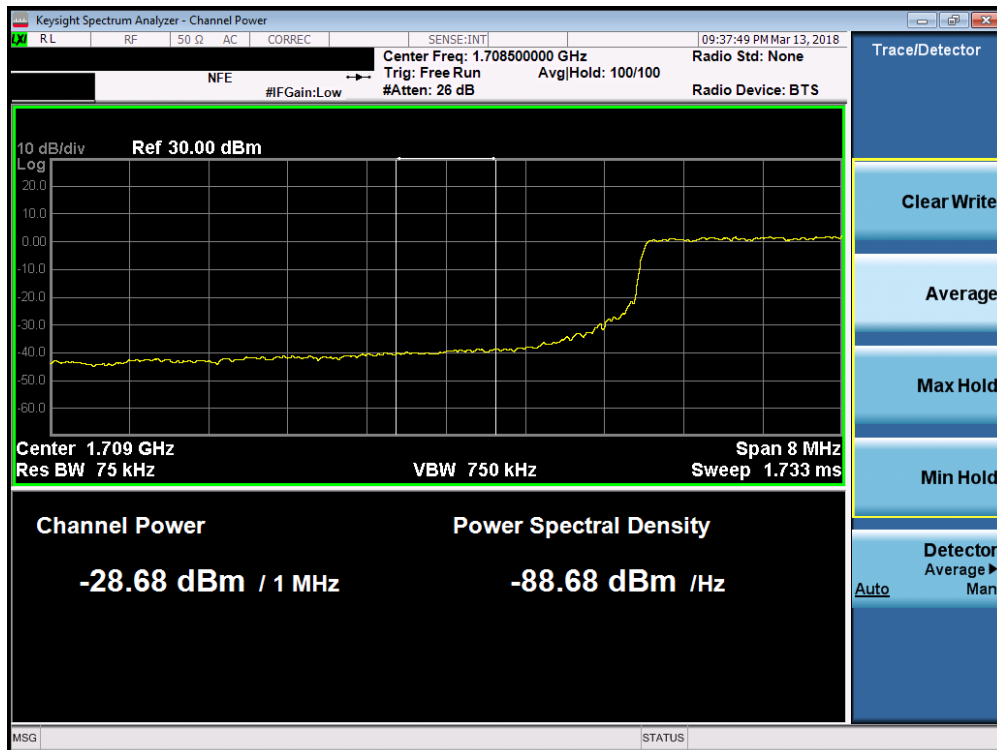


Plot 7-156. Lower Extended Band Edge Plot (Band 66/4 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 100 of 167




Plot 7-157. Upper Band Edge Plot (Band 4 - 10.0MHz QPSK - Full RB Configuration)

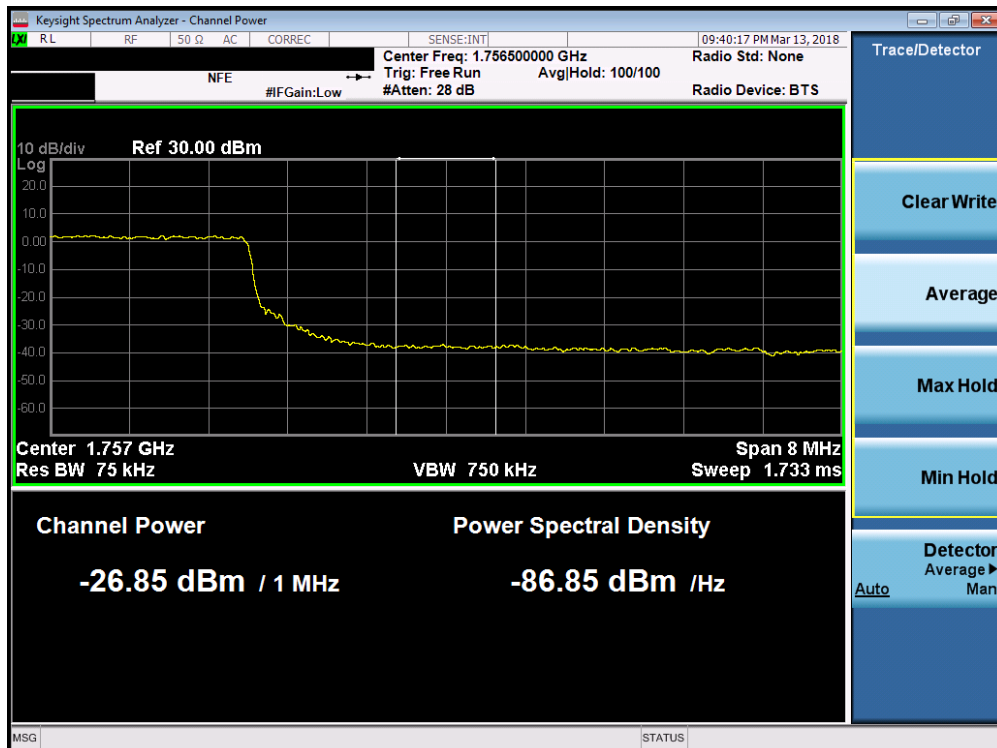


Plot 7-158. Upper Extended Band Edge Plot (Band 4 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 101 of 167

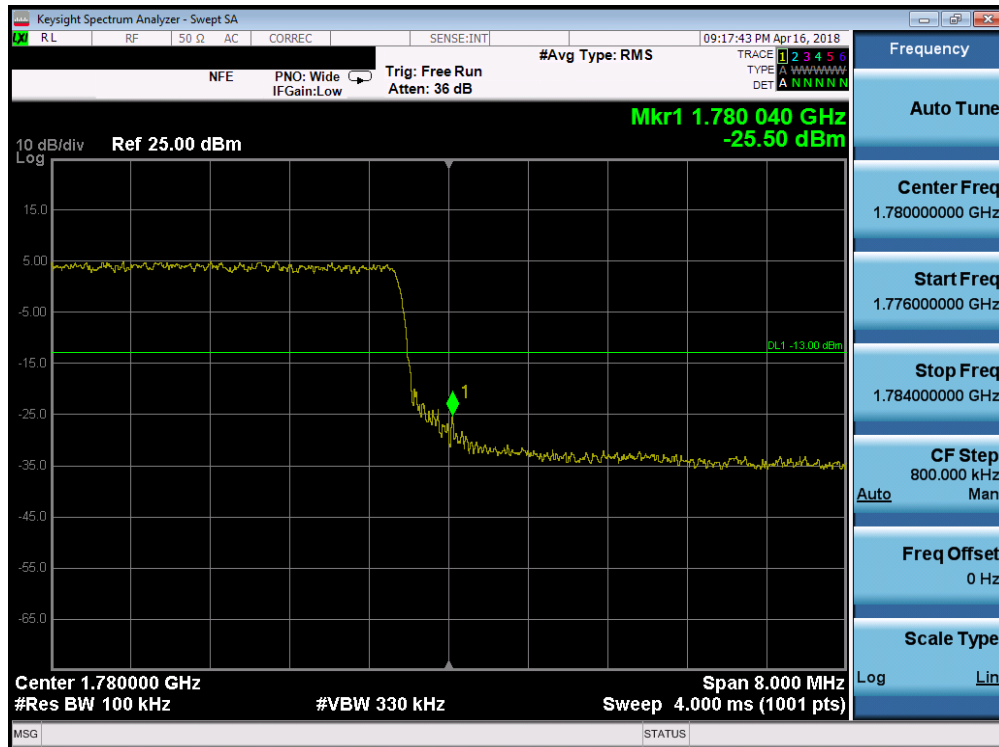


Plot 7-159. Upper Band Edge Plot (Band 66 - 10.0MHz QPSK - Full RB Configuration)

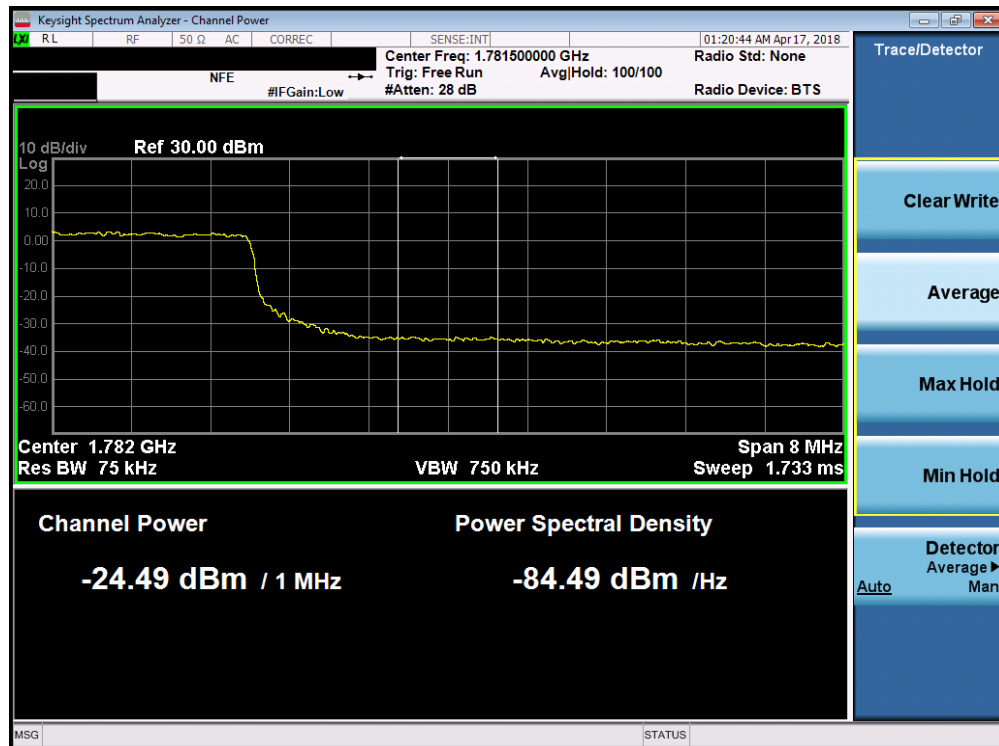


Plot 7-160. Upper Extended Band Edge Plot (Band 66 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 102 of 167

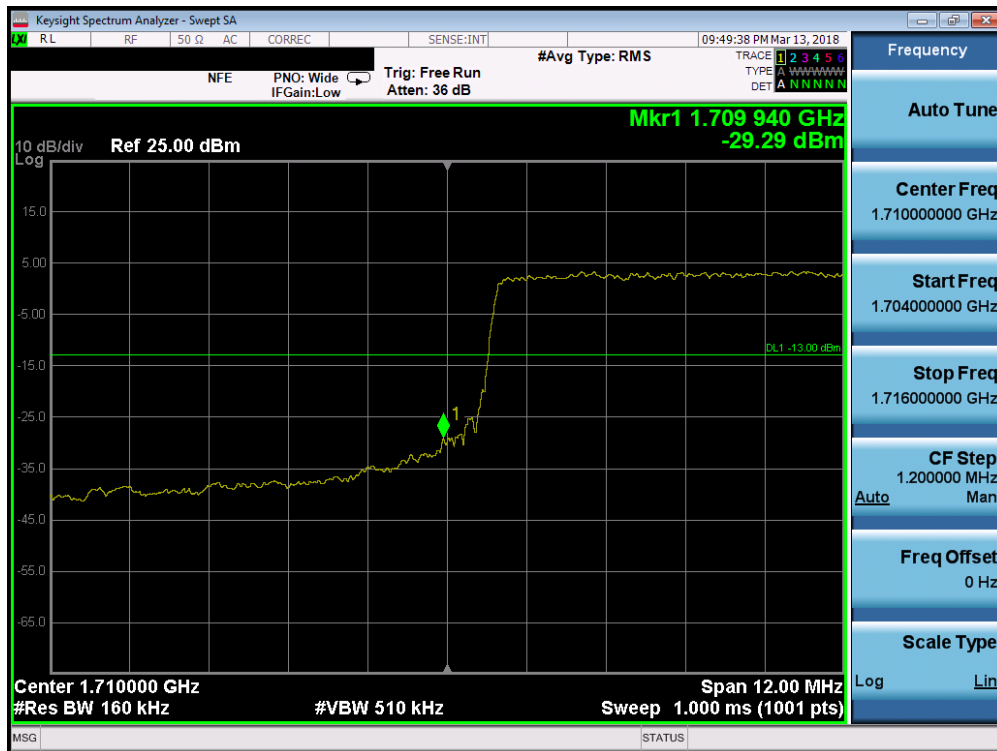

Plot 7-161. Lower Band Edge Plot (Band 66/4 - 15.0MHz QPSK - Full RB Configuration)

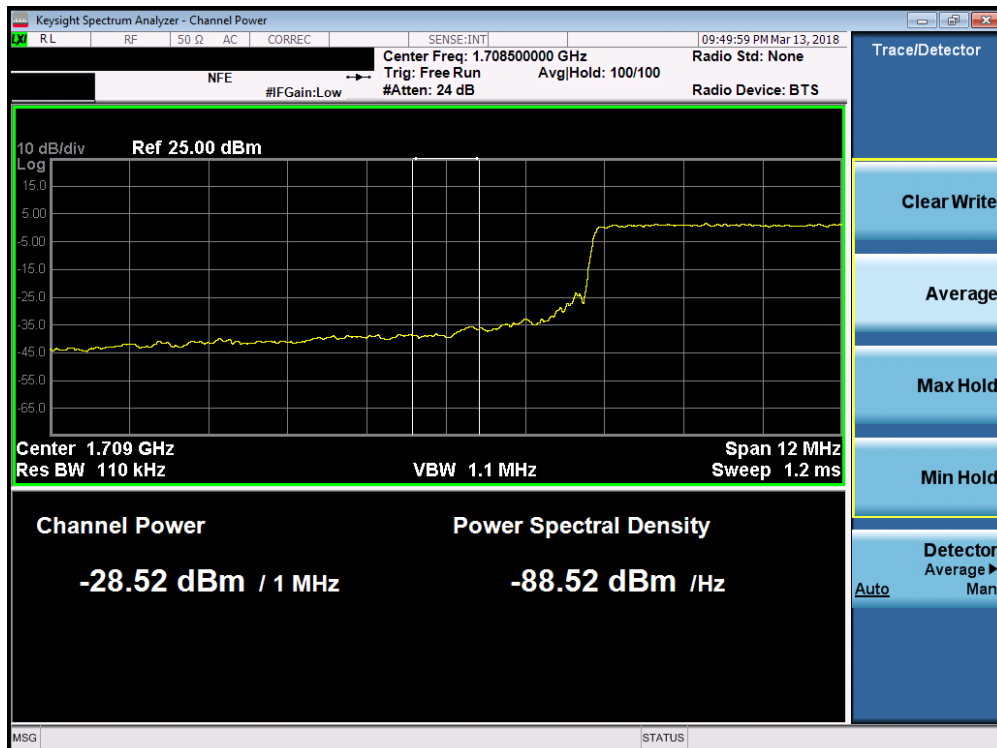


Plot 7-162. Lower Extended Band Edge Plot (Band 66/4 - 15.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 103 of 167




Plot 7-163. Upper Band Edge Plot (Band 4 - 15.0MHz QPSK - Full RB Configuration)

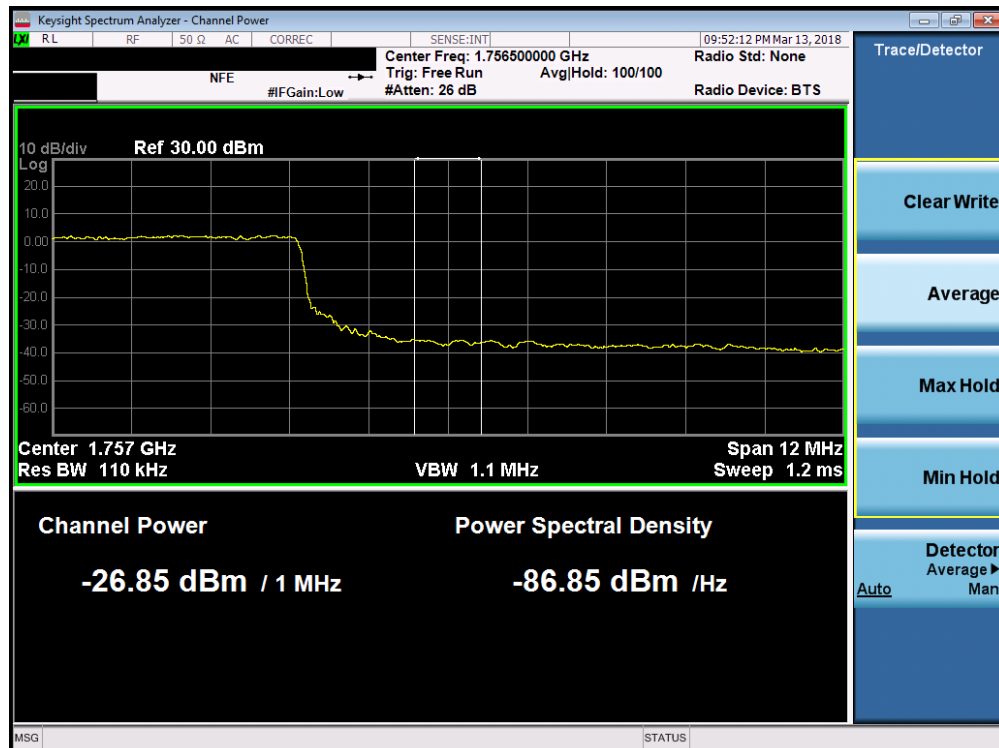


Plot 7-164. Upper Extended Band Edge Plot (Band 4 - 15.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 104 of 167

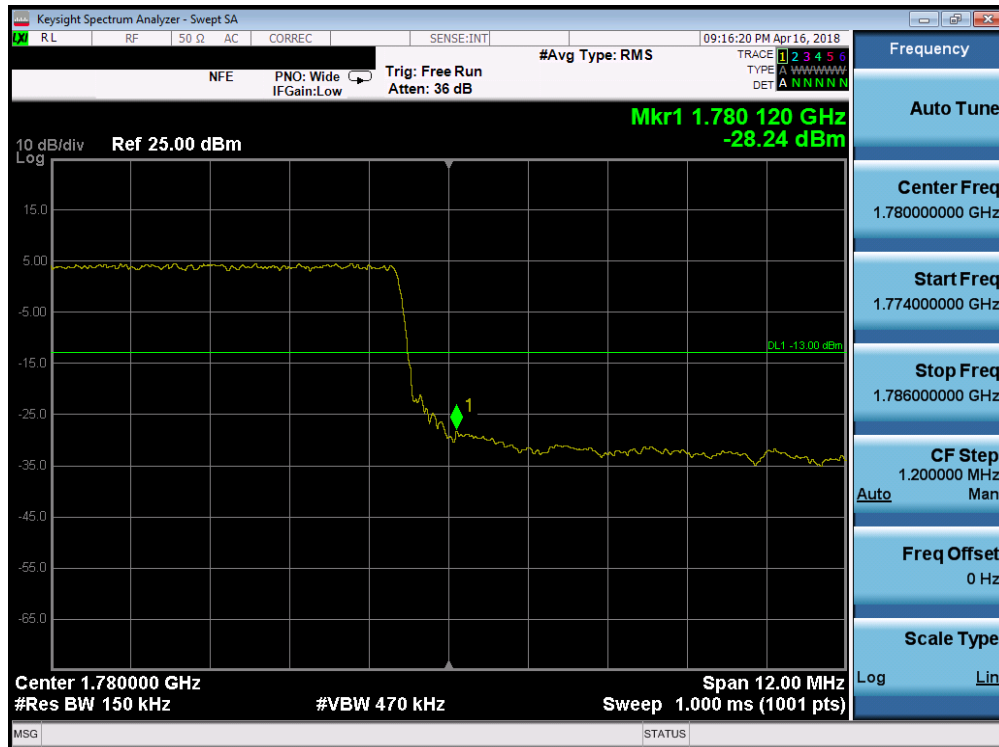

Plot 7-165. Upper Band Edge Plot (Band 66 - 15.0MHz QPSK - Full RB Configuration)

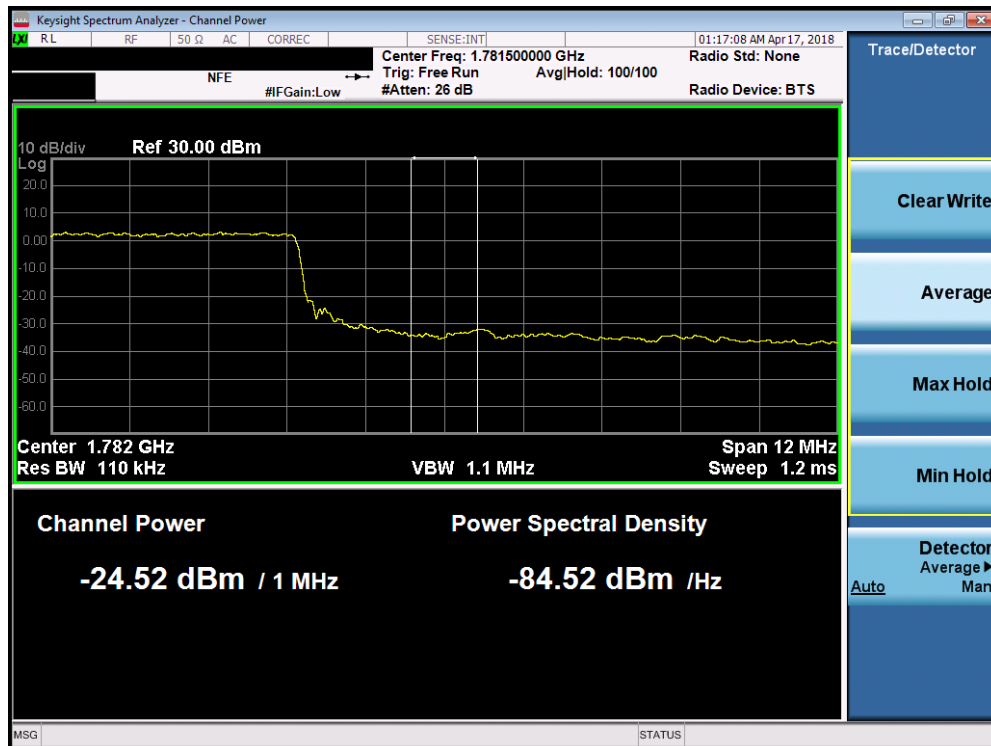


Plot 7-166. Upper Extended Band Edge Plot (Band 66 - 15.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 105 of 167



Plot 7-167. Lower Band Edge Plot (Band 66/4 - 20.0MHz QPSK - Full RB Configuration)

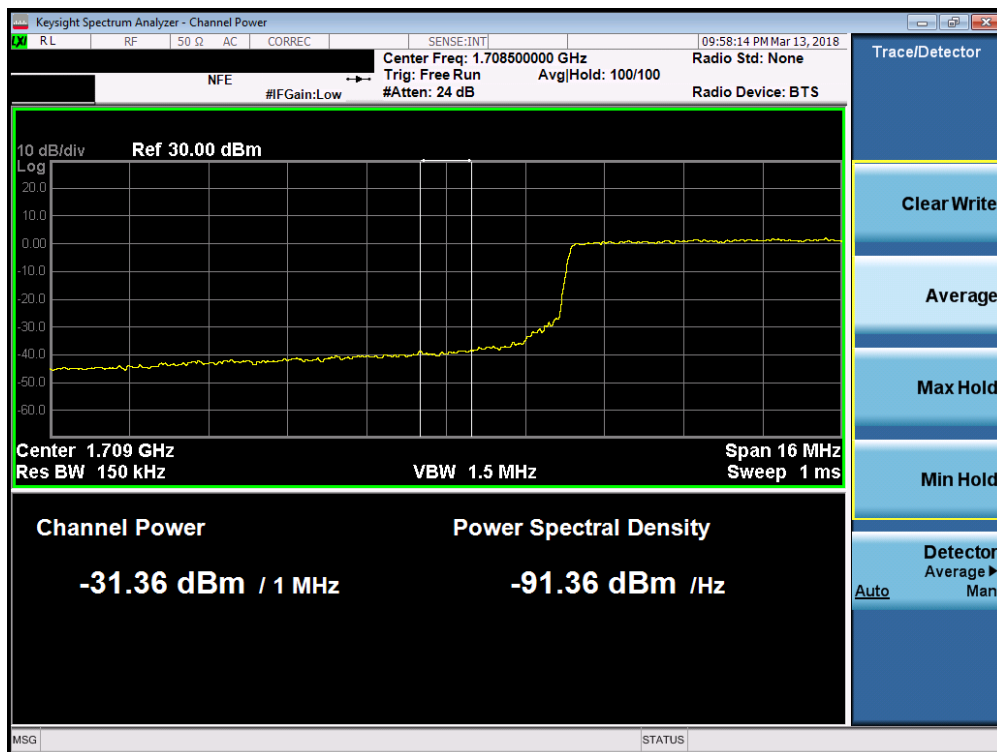


Plot 7-168. Lower Extended Band Edge Plot (Band 66/4 - 20.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 106 of 167



Plot 7-169. Upper Band Edge Plot (Band 4 - 20.0MHz QPSK - Full RB Configuration)

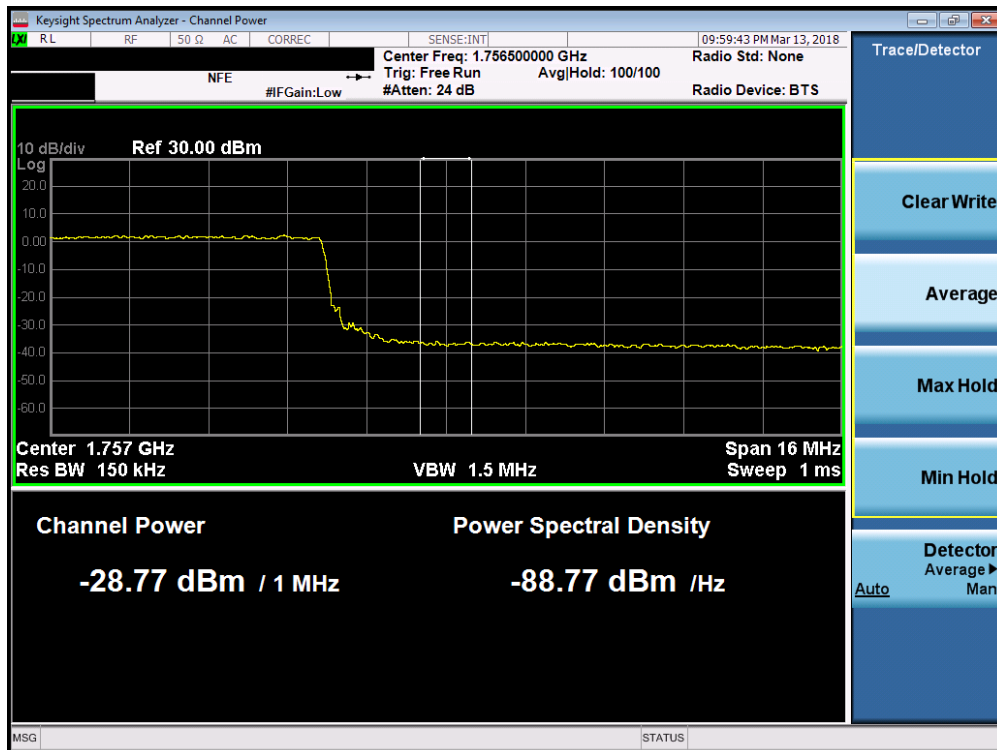


Plot 7-170. Upper Extended Band Edge Plot (Band 4 - 20.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 107 of 167



Plot 7-171. Upper Band Edge Plot (Band 66 - 20.0MHz QPSK - Full RB Configuration)

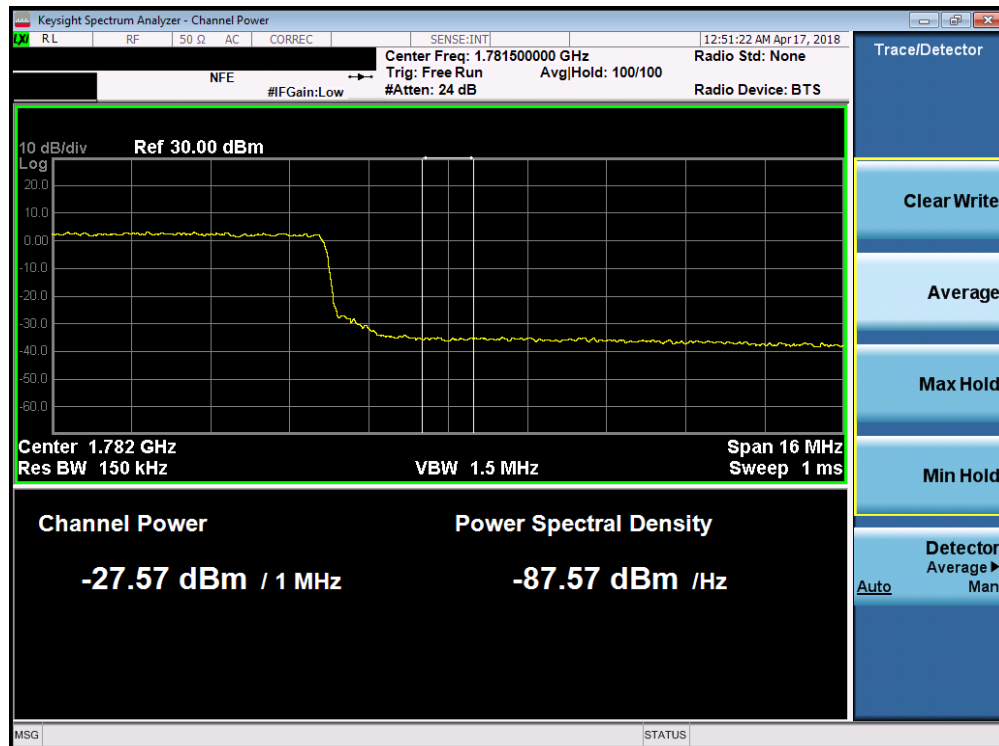


Plot 7-172. Upper Extended Band Edge Plot (Band 66 - 20.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 108 of 167

Band 2



Plot 7-173. Lower Band Edge Plot (Band 2 - 1.4MHz QPSK - Full RB Configuration)

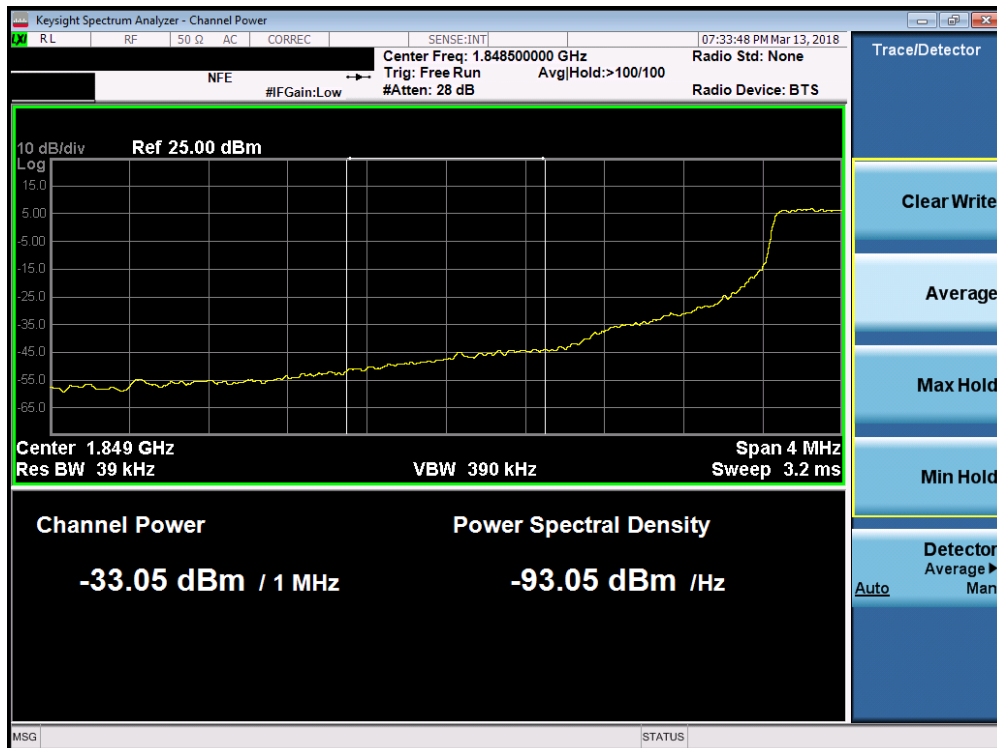


Plot 7-174. Lower Extended Band Edge Plot (Band 2 - 1.4MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 109 of 167



Plot 7-175. Upper Band Edge Plot (Band 2 - 1.4MHz QPSK - Full RB Configuration)

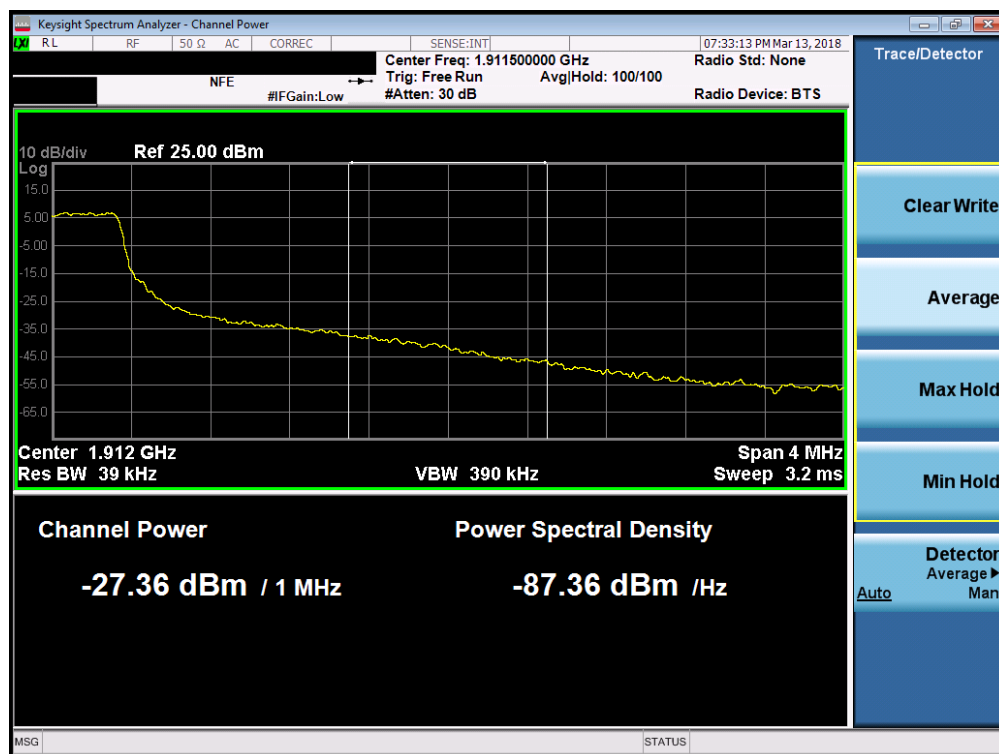


Plot 7-176. Upper Extended Band Edge Plot (Band 2 - 1.4MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 110 of 167



Plot 7-177. Lower Band Edge Plot (Band 2 - 3.0MHz QPSK - Full RB Configuration)

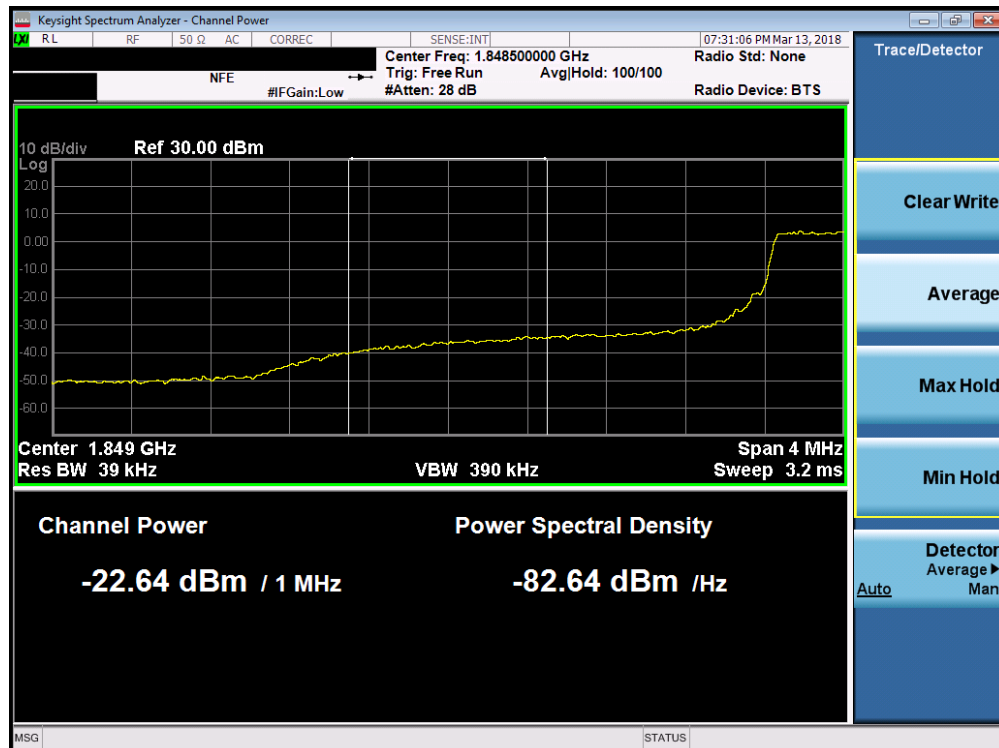


Plot 7-178. Lower Extended Band Edge Plot (Band 2 - 3.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 111 of 167




Plot 7-179. Upper Band Edge Plot (Band 2 - 3.0MHz QPSK - Full RB Configuration)

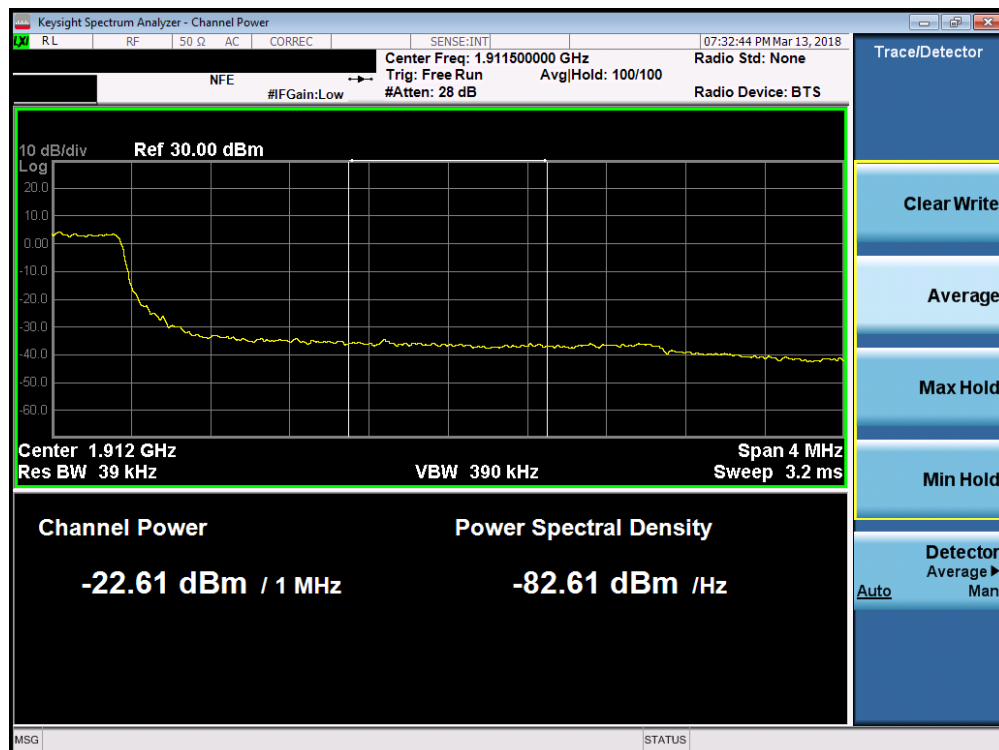


Plot 7-180. Upper Extended Band Edge Plot (Band 2 - 3.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 112 of 167

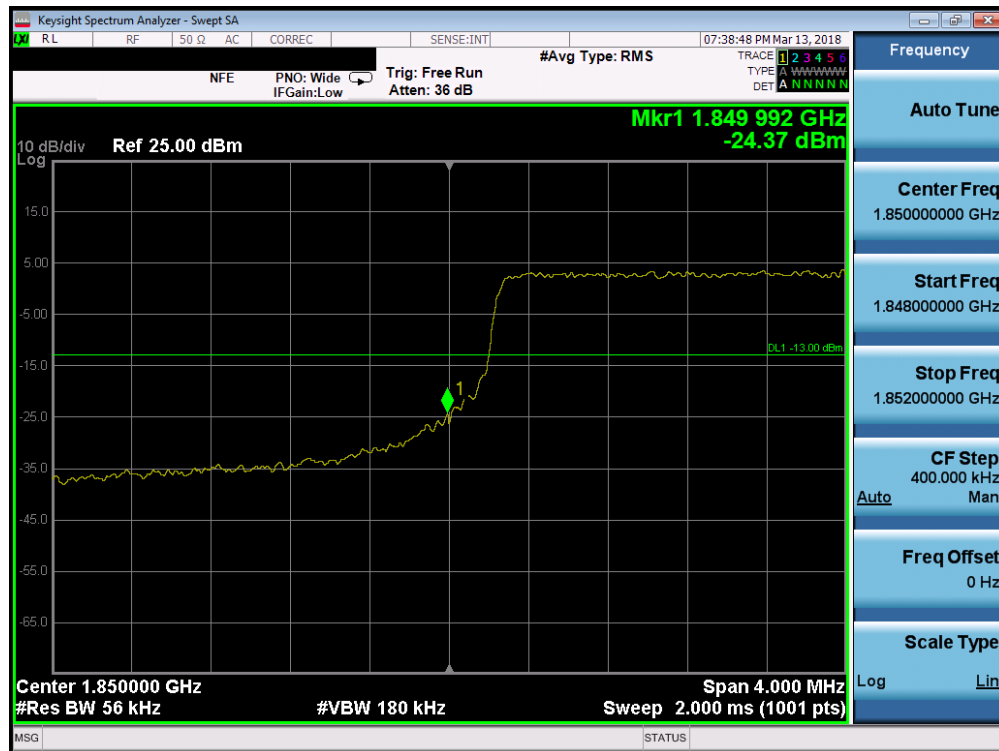

Plot 7-181. Lower Band Edge Plot (Band 2 - 5.0MHz QPSK - Full RB Configuration)

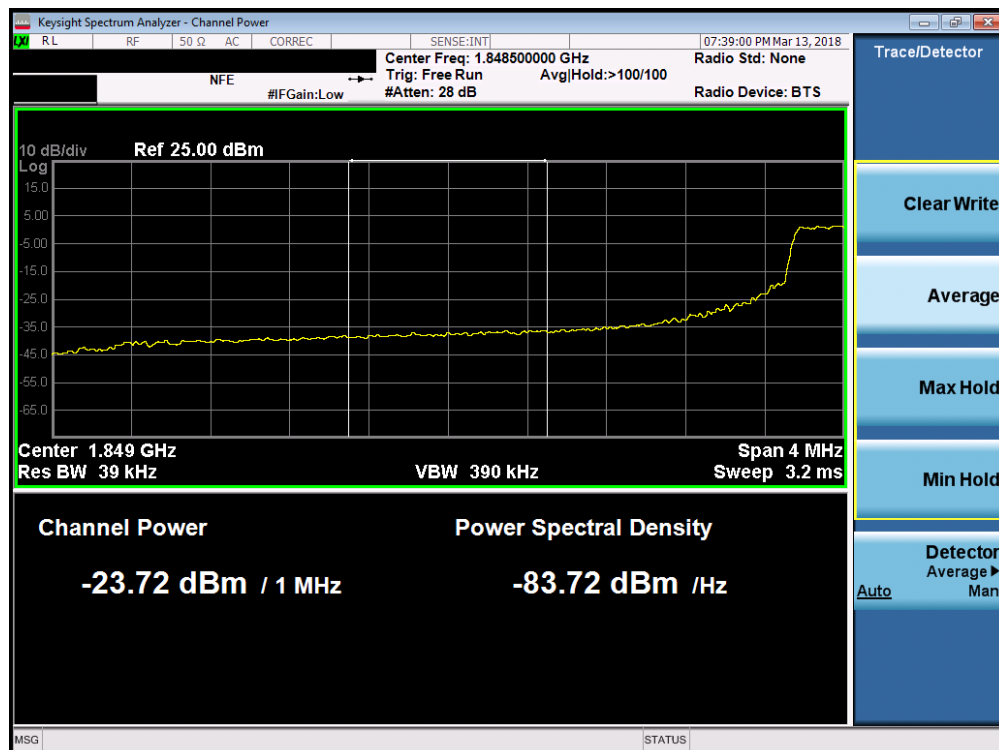


Plot 7-182. Lower Extended Band Edge Plot (Band 2 - 5.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 113 of 167




Plot 7-183. Upper Band Edge Plot (Band 2 - 5.0MHz QPSK - Full RB Configuration)

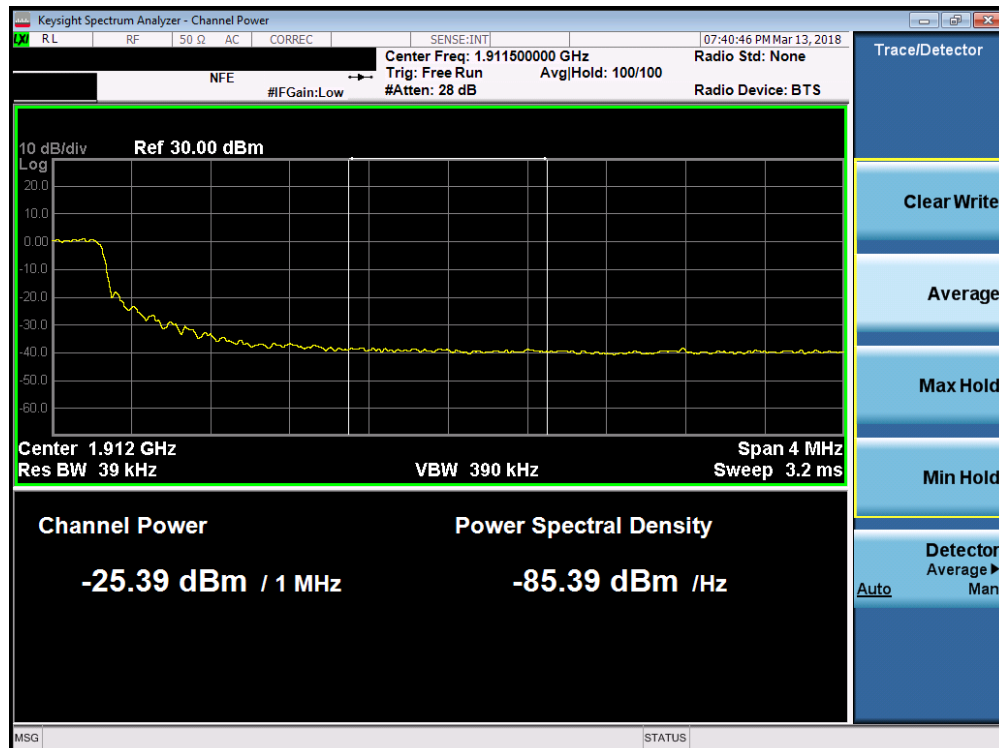


Plot 7-184. Upper Extended Band Edge Plot (Band 2 - 5.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 114 of 167

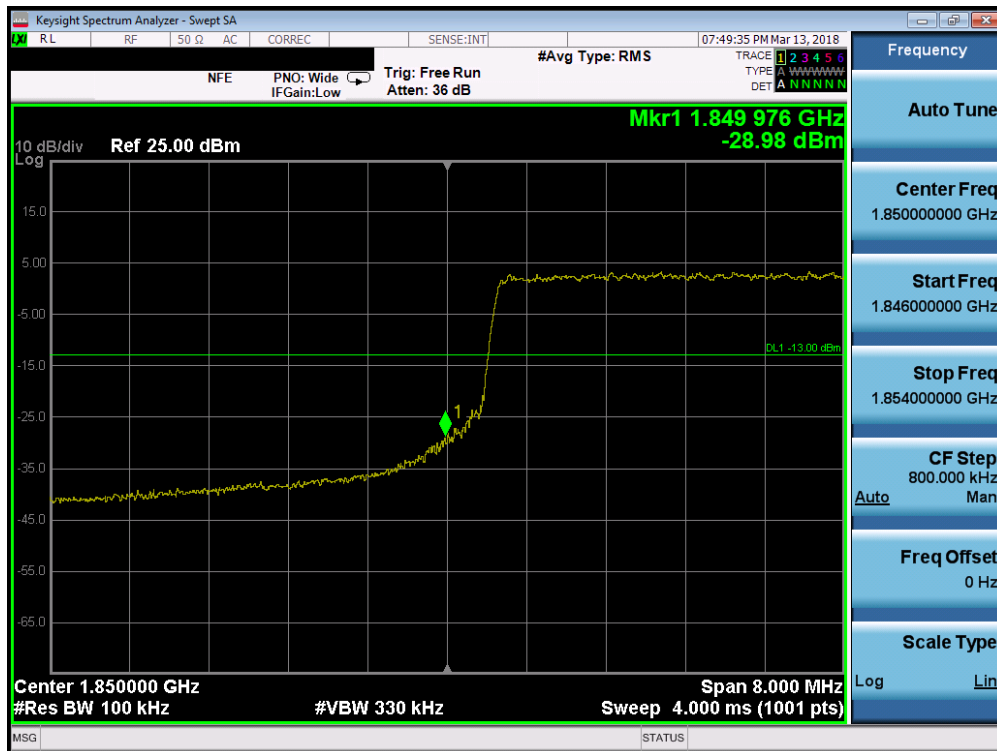

Plot 7-185. Lower Band Edge Plot (Band 2 - 10.0MHz QPSK - Full RB Configuration)

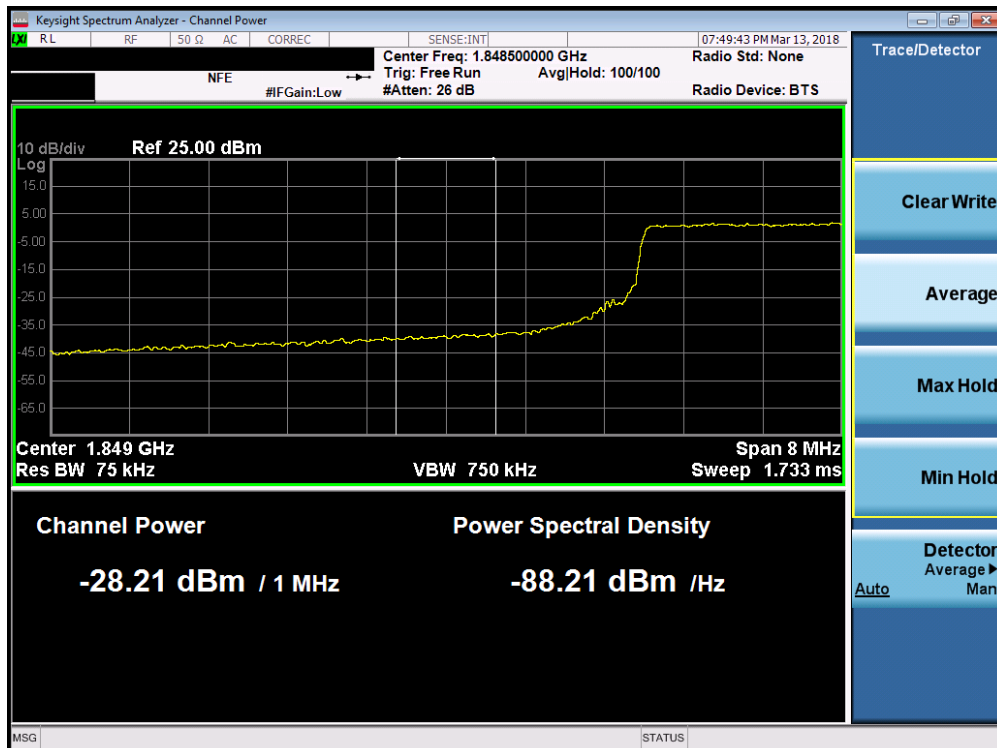


Plot 7-186. Lower Extended Band Edge Plot (Band 2 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 115 of 167




Plot 7-187. Upper Band Edge Plot (Band 2 - 10.0MHz QPSK - Full RB Configuration)

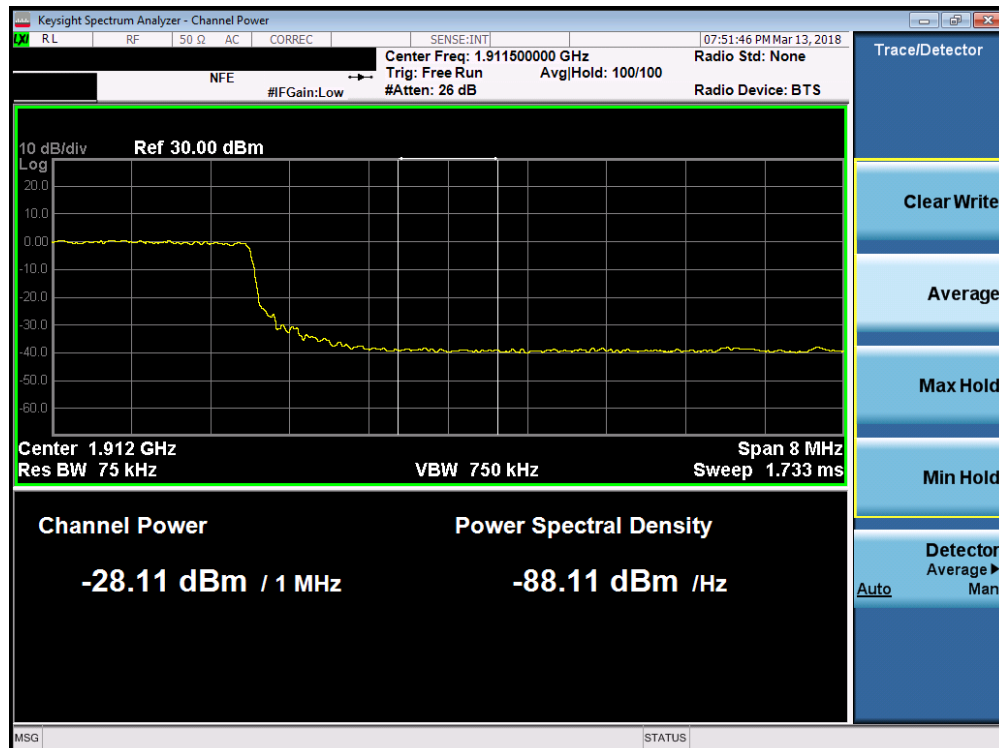


Plot 7-188. Upper Extended Band Edge Plot (Band 2 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 116 of 167

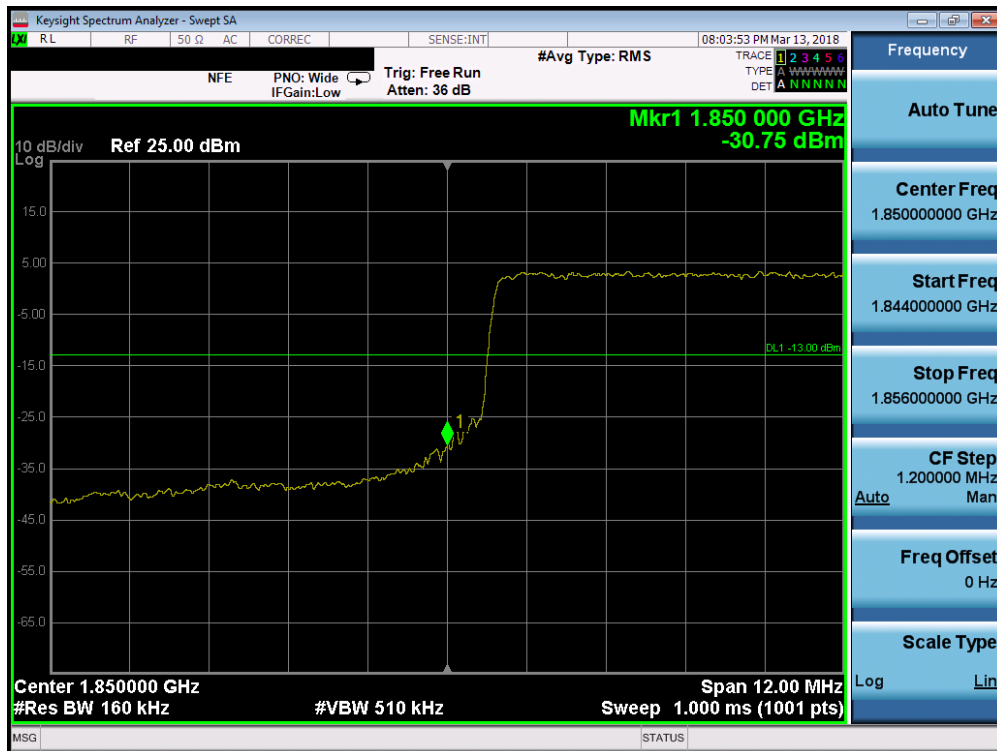

Plot 7-189. Lower Band Edge Plot (Band 2 - 15.0MHz QPSK - Full RB Configuration)

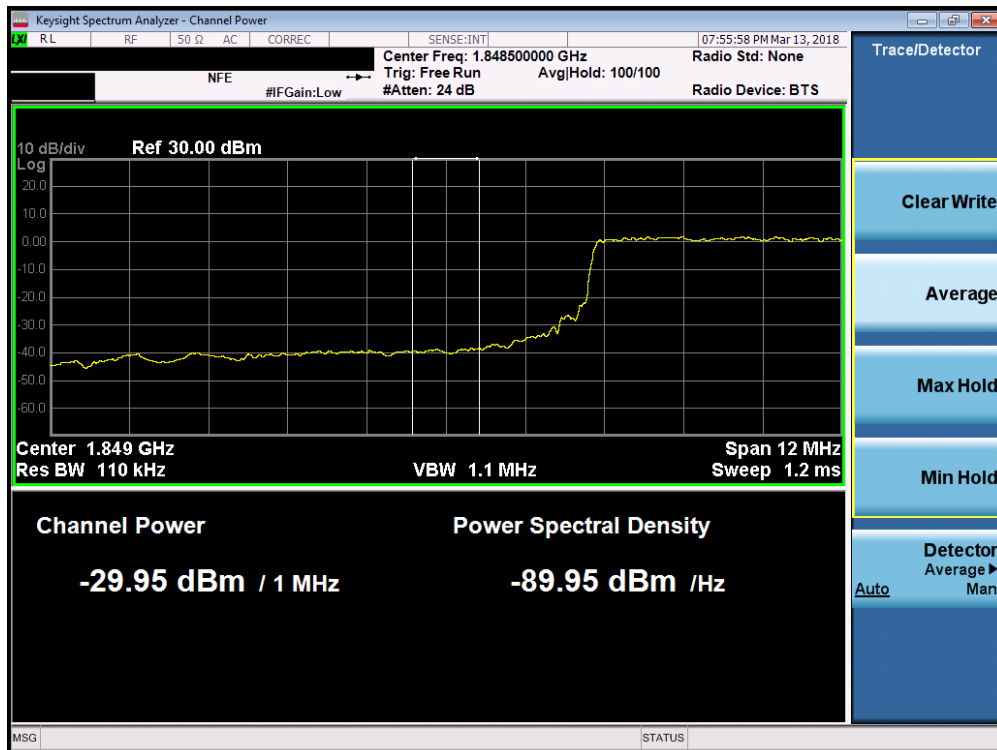


Plot 7-190. Lower Extended Band Edge Plot (Band 2 - 15.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 117 of 167




Plot 7-191. Upper Band Edge Plot (Band 2 - 15.0MHz QPSK - Full RB Configuration)

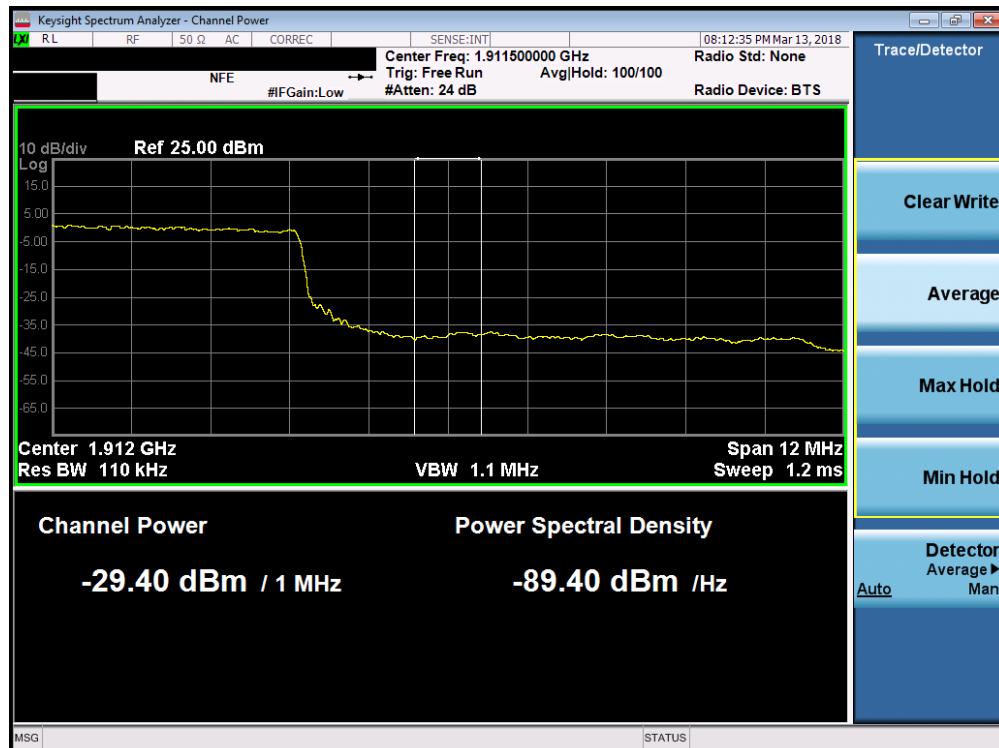


Plot 7-192. Upper Extended Band Edge Plot (Band 2 - 15.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 118 of 167

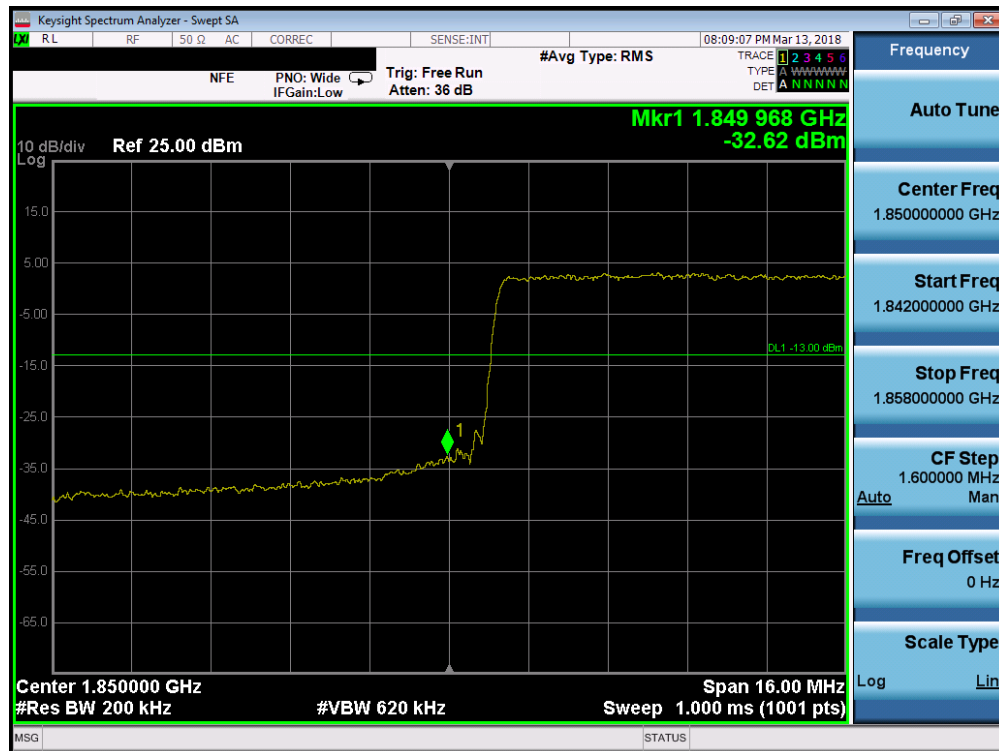

Plot 7-193. Lower Band Edge Plot (Band 2 - 20.0MHz QPSK - Full RB Configuration)

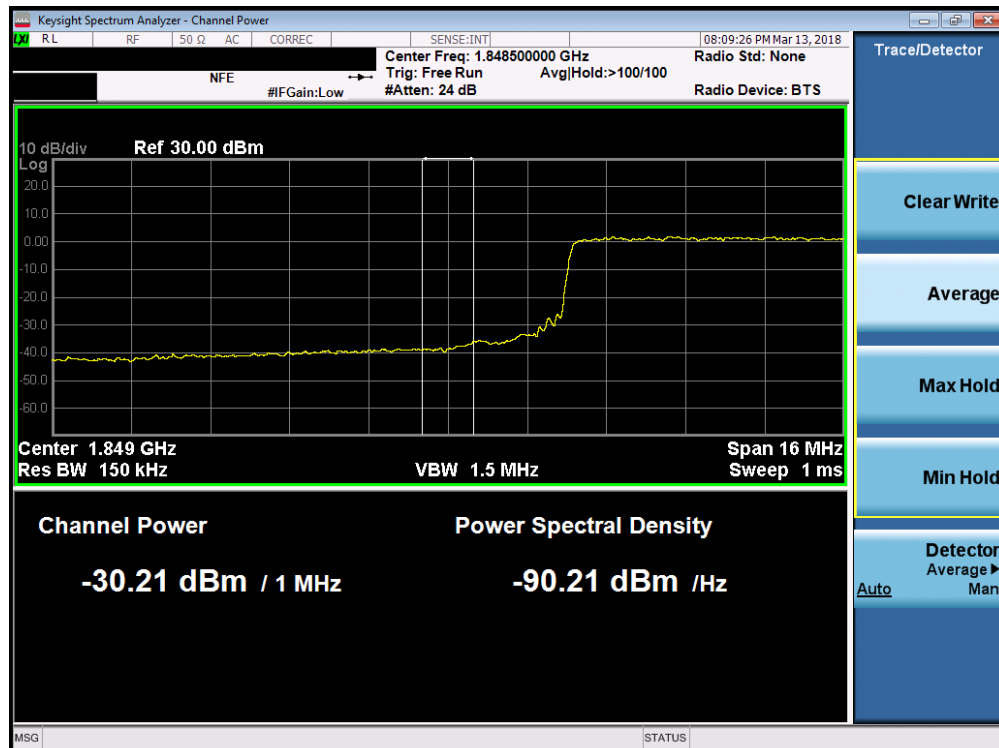


Plot 7-194. Lower Extended Band Edge Plot (Band 2 - 20.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 119 of 167




Plot 7-195. Upper Band Edge Plot (Band 2 - 20.0MHz QPSK - Full RB Configuration)

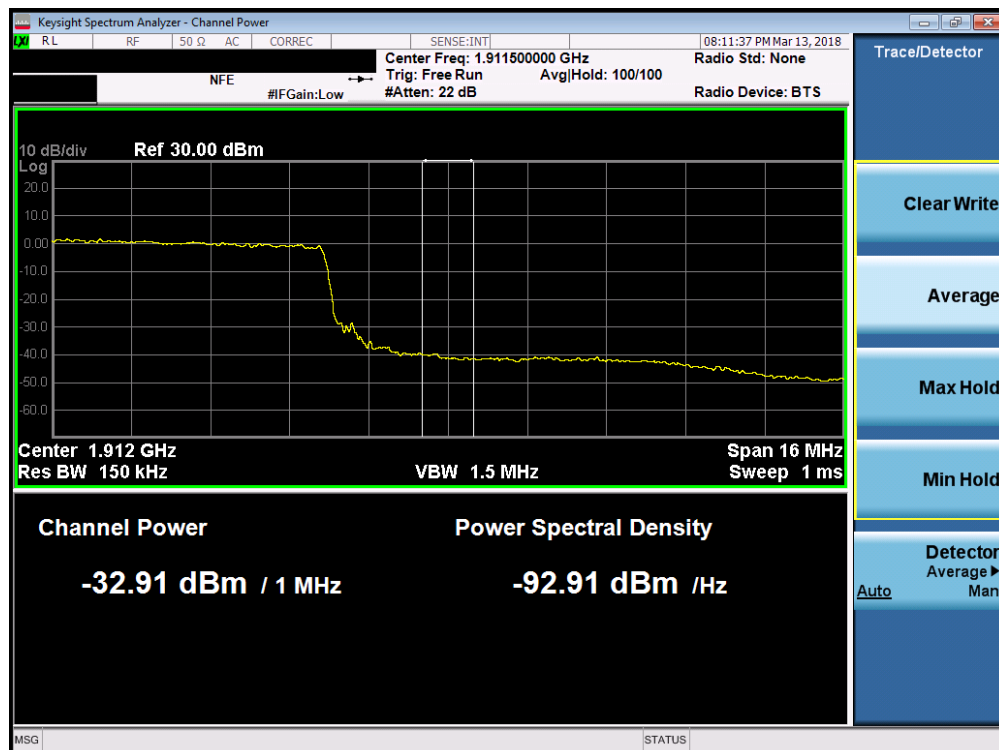


Plot 7-196. Upper Extended Band Edge Plot (Band 2 - 20.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 120 of 167

Band 7

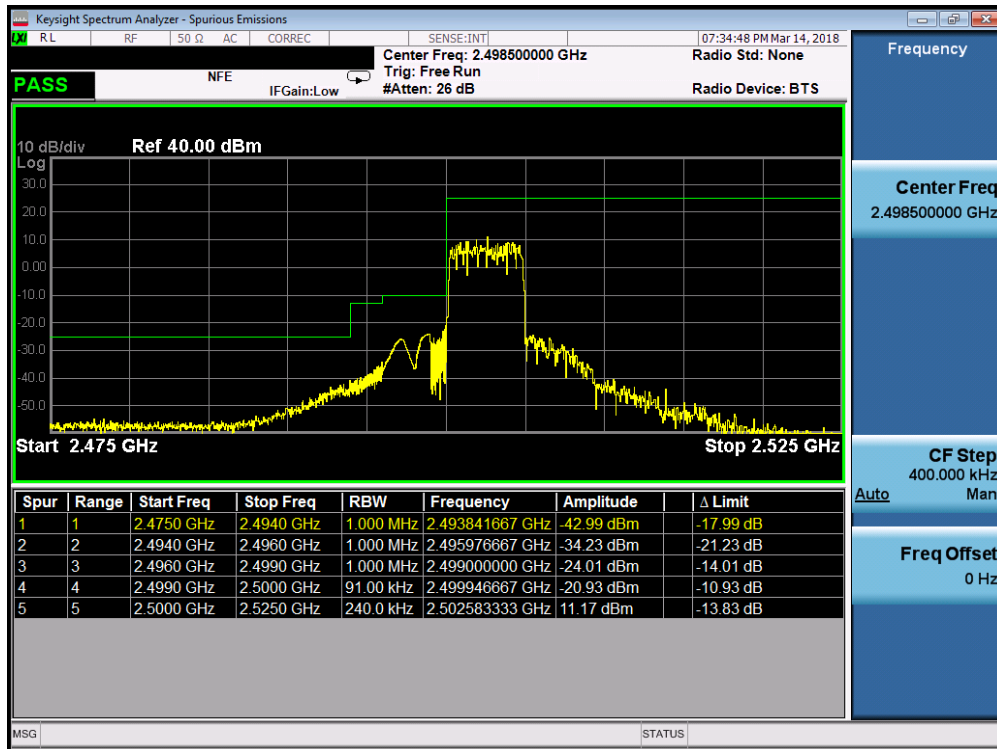


Plot 7-197. Lower ACP Plot (Band 7 – 5.0MHz QPSK – RB Size 25)

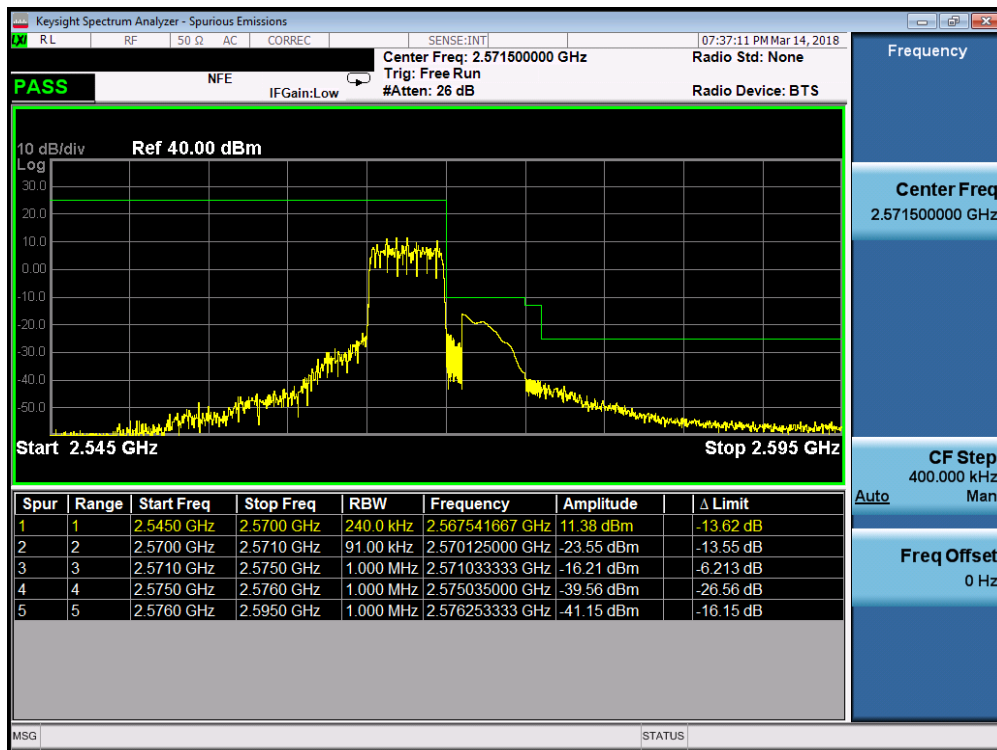


Plot 7-198. Upper ACP Plot (Band 7 – 5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMJ737T			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 121 of 167		

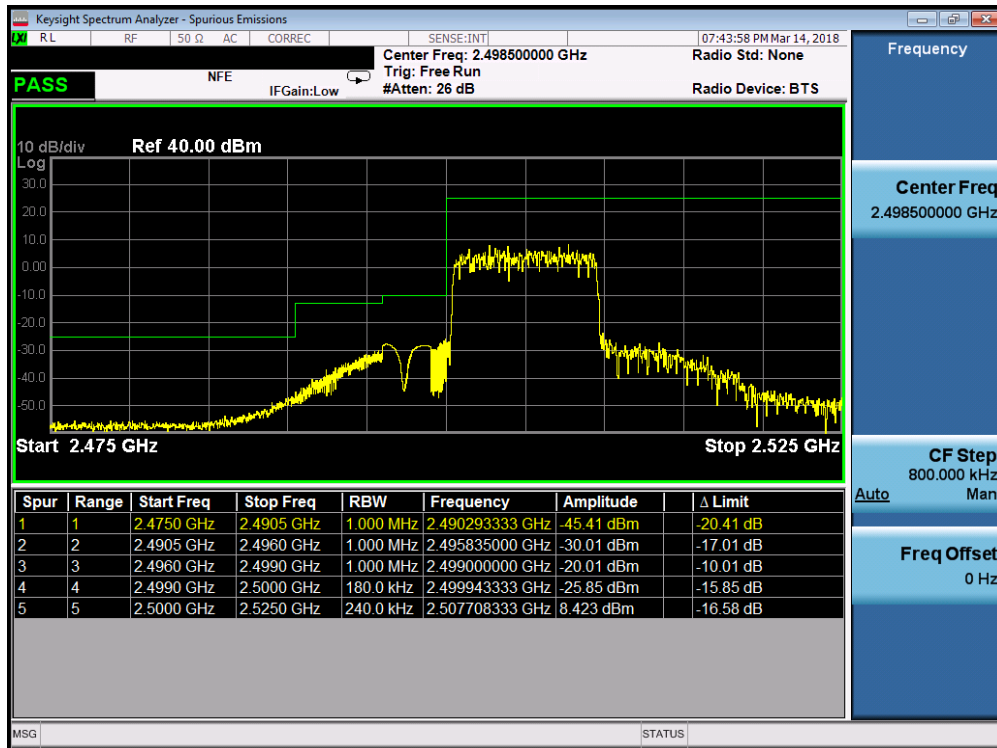


Plot 7-199. Lower ACP Plot (Band 7 – 10.0MHz QPSK – RB Size 50)

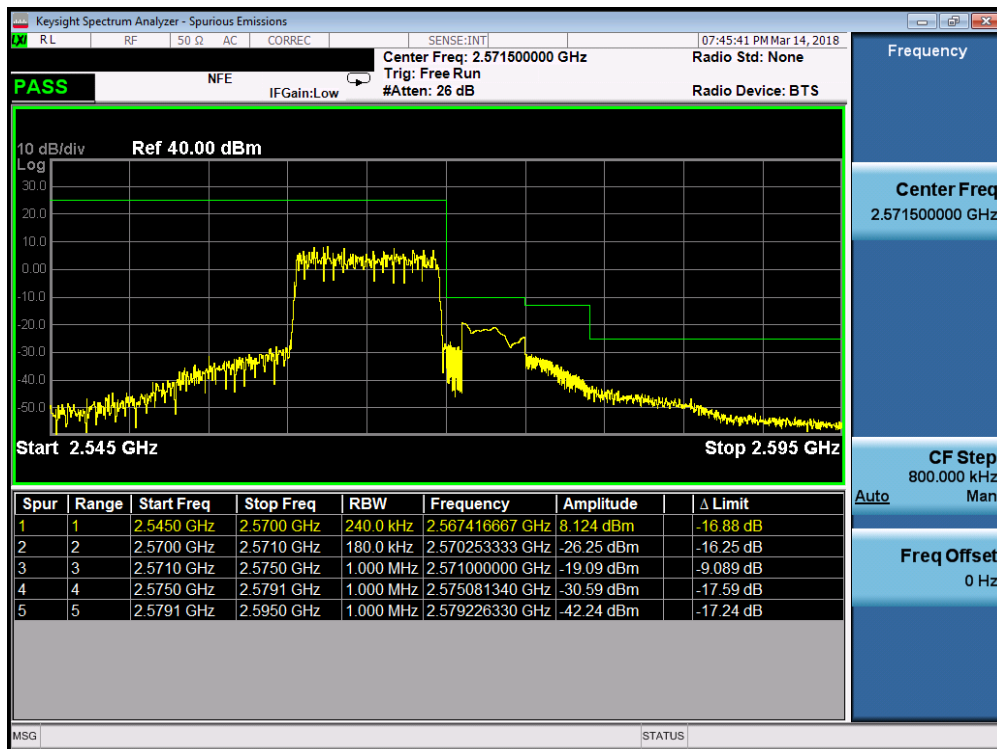


Plot 7-200. Upper ACP Plot (Band 7 – 10.0MHz QPSK – RB Size 50)

FCC ID: A3LSMJ737T	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 122 of 167

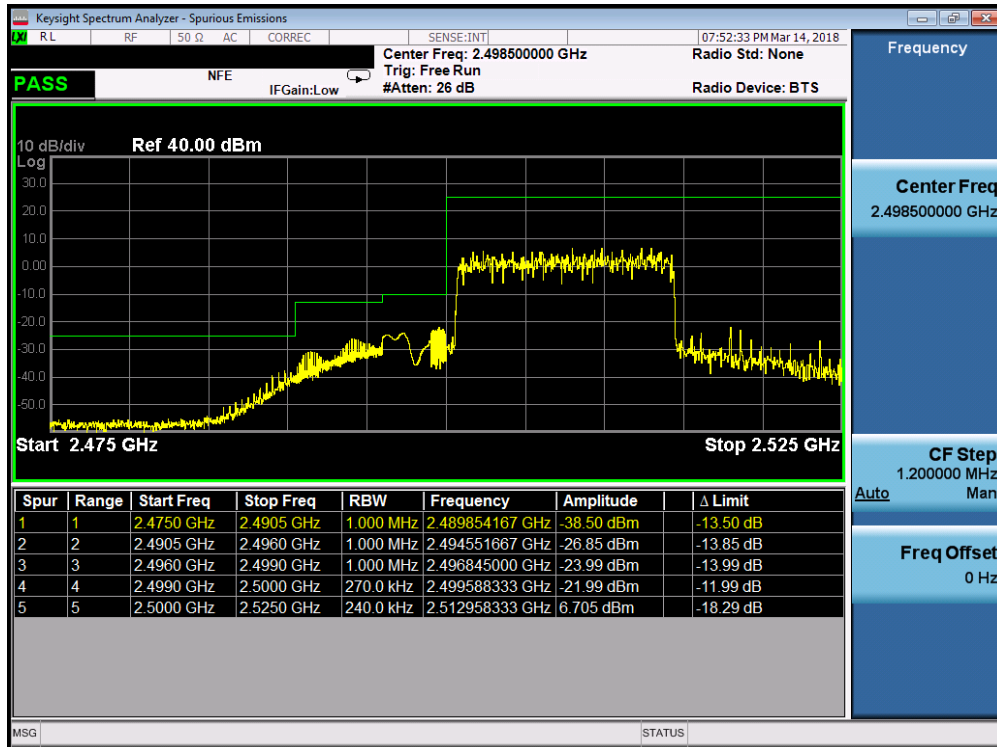


Plot 7-201. Lower ACP Plot (Band 7 – 15.0MHz QPSK – RB Size 75)

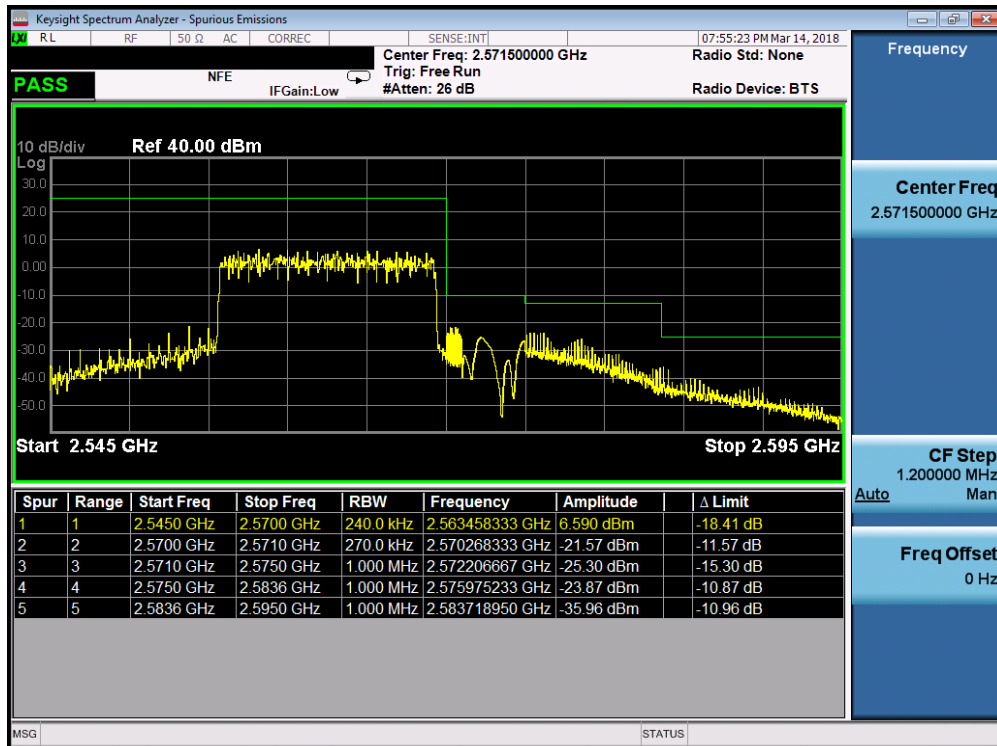


Plot 7-202. Upper ACP Plot (Band 7 – 15.0MHz QPSK – RB Size 75)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 123 of 167

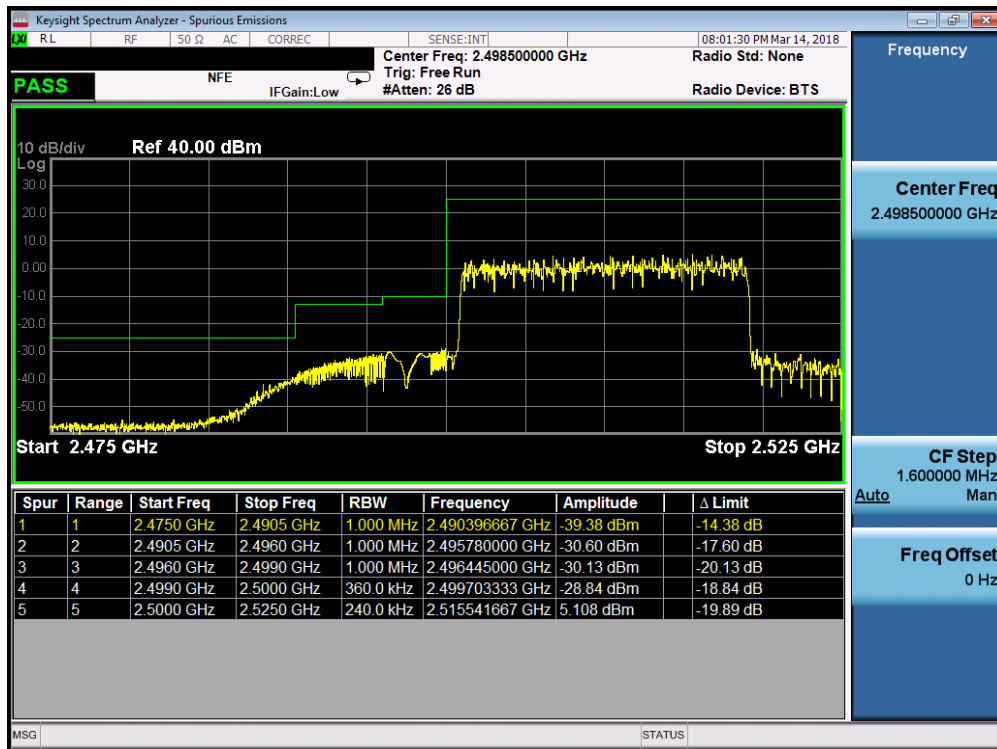

Plot 7-203. Lower ACP Plot (Band 7 – 20.0MHz QPSK – RB Size 100)

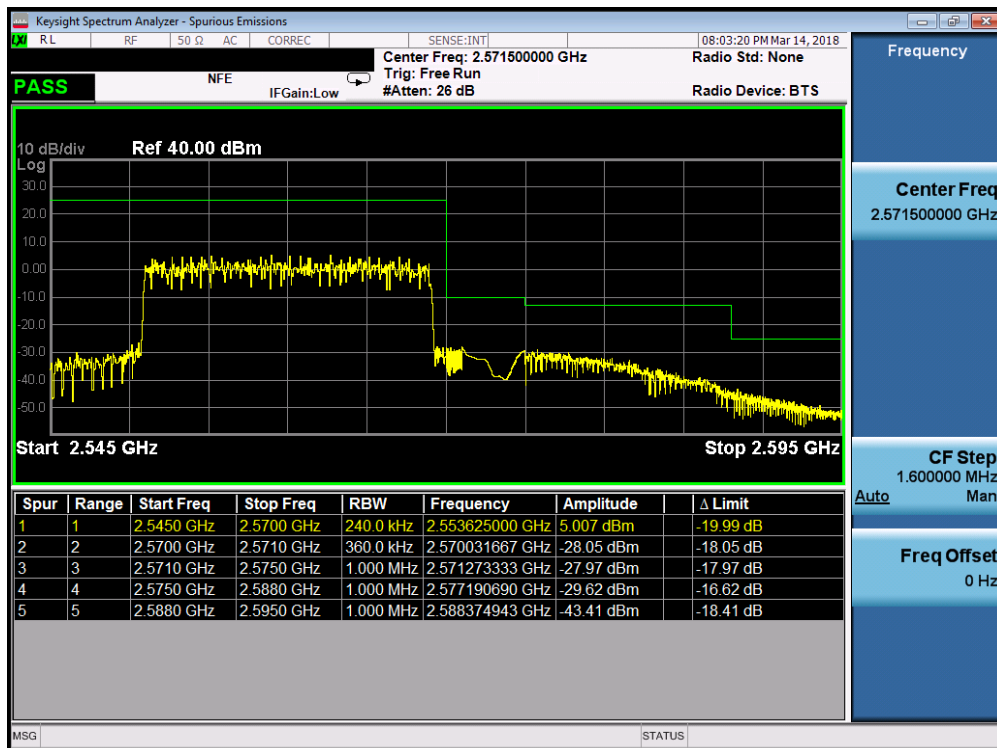

Plot 7-204. Upper ACP Plot (Band 7 – 20.0MHz QPSK – RB Size 100)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 124 of 167

7.5 Peak-Average Ratio

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 D01 v03 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

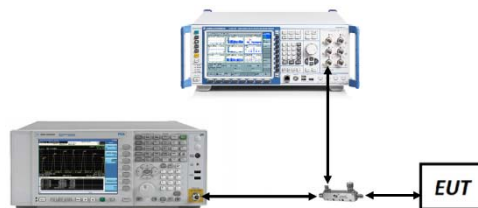



Figure 7-4. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 125 of 167

Band 2

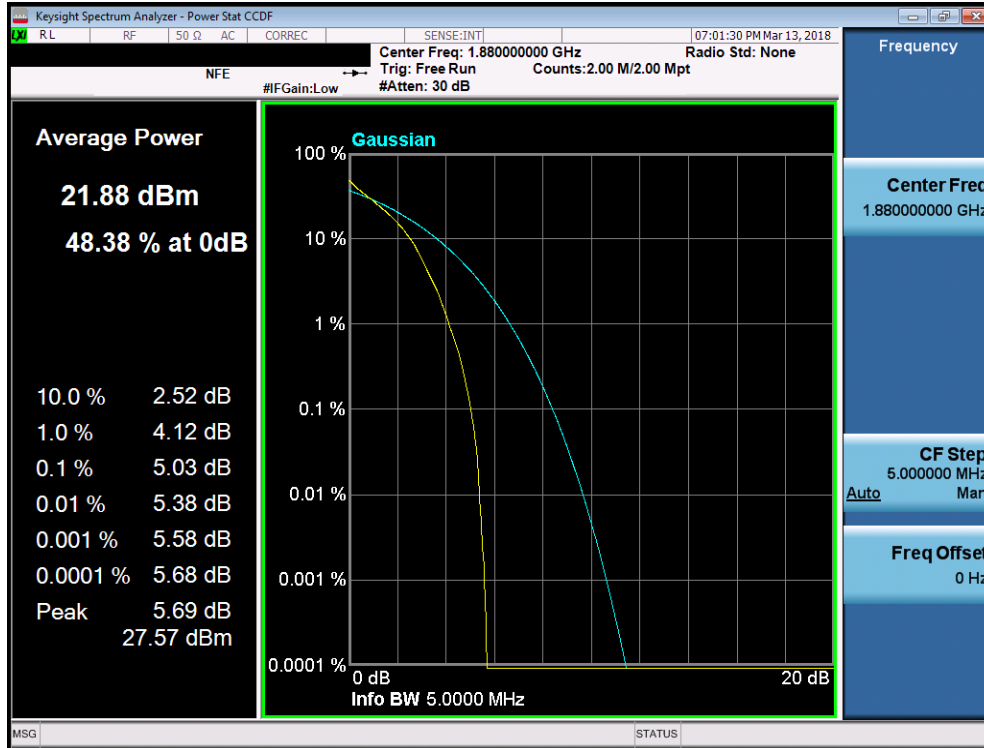


Plot 7-205. PAR Plot (Band 2 - 1.4MHz QPSK - Full RB Configuration)

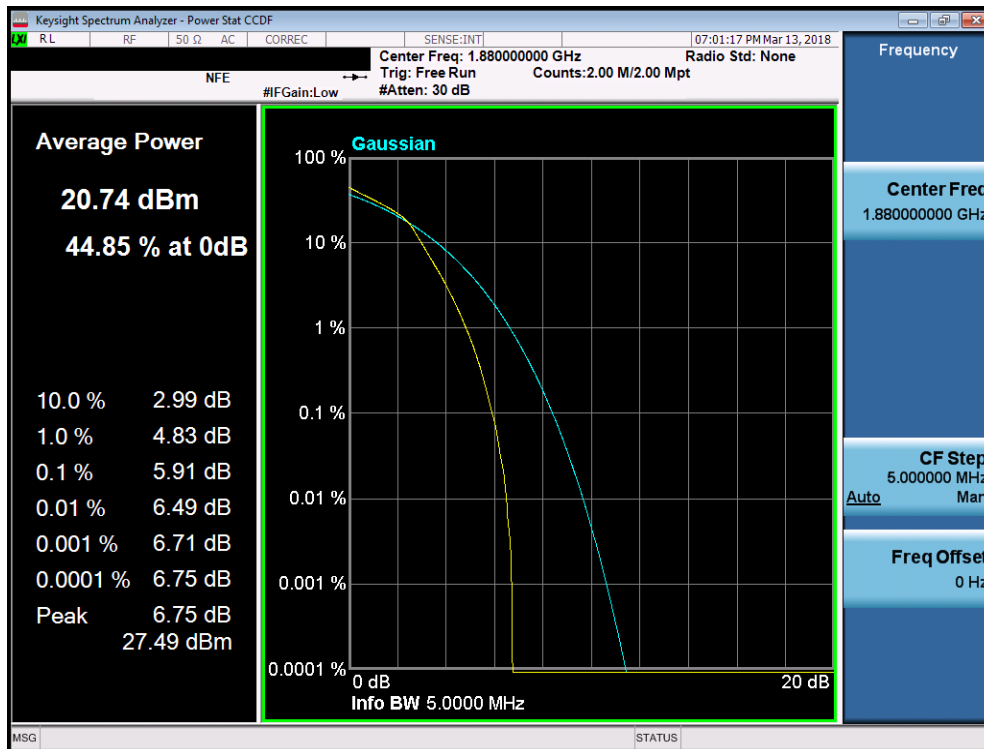


Plot 7-206. PAR Plot (Band 2 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMJ737T	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 126 of 167

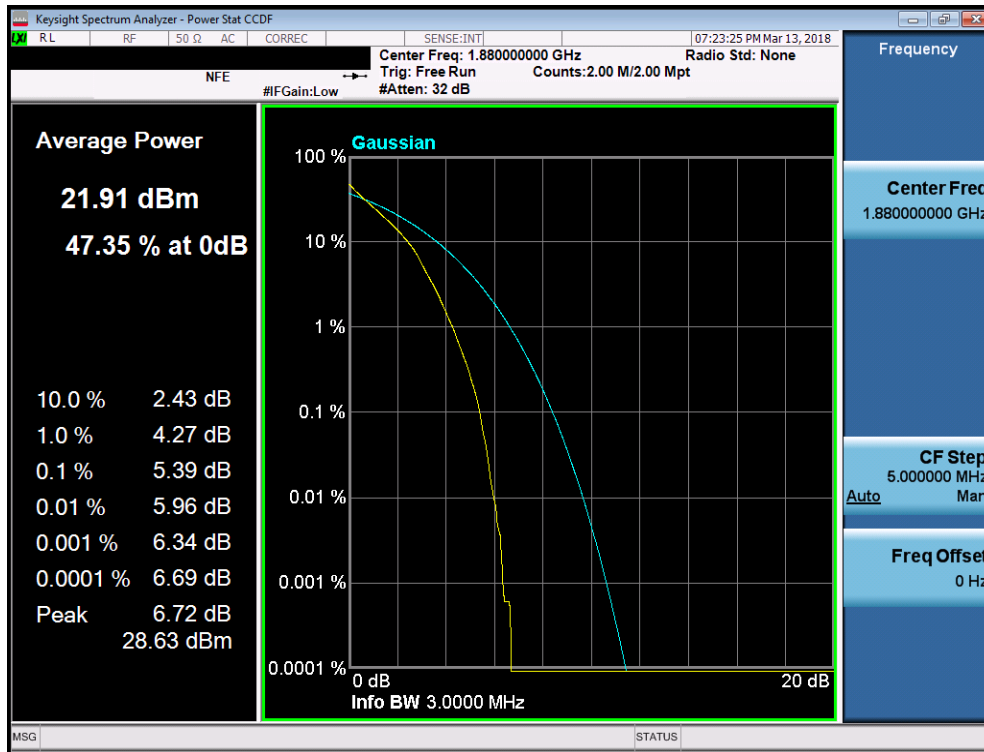


Plot 7-207. PAR Plot (Band 2 - 3.0MHz QPSK - Full RB Configuration)

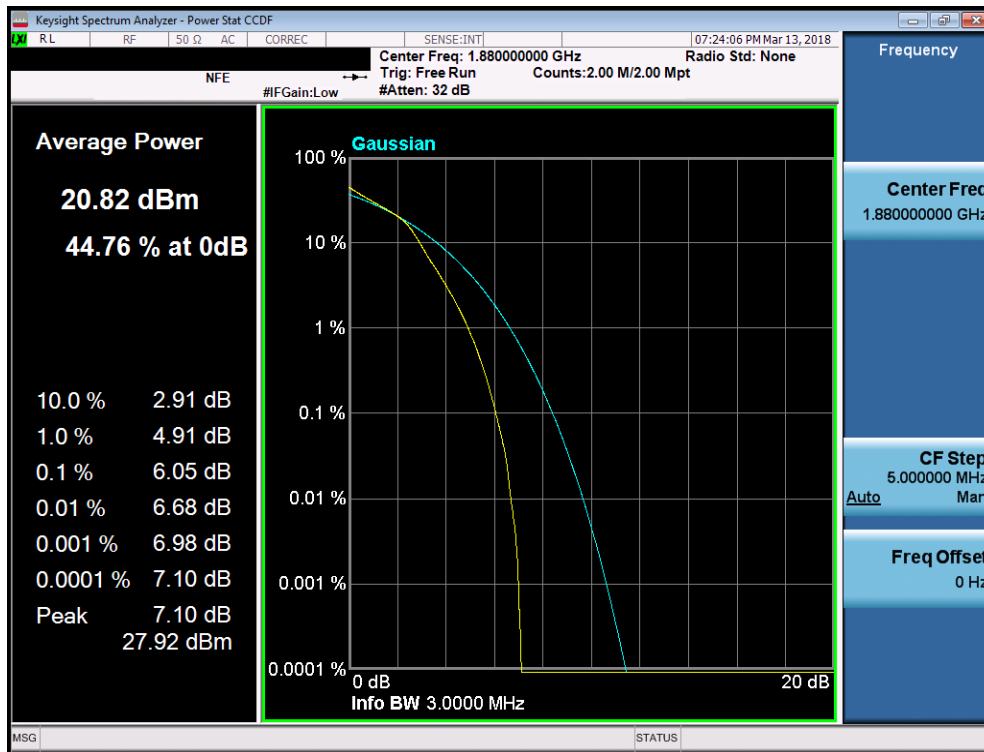


Plot 7-208. PAR Plot (Band 2 - 3.0MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMJ737T	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 127 of 167

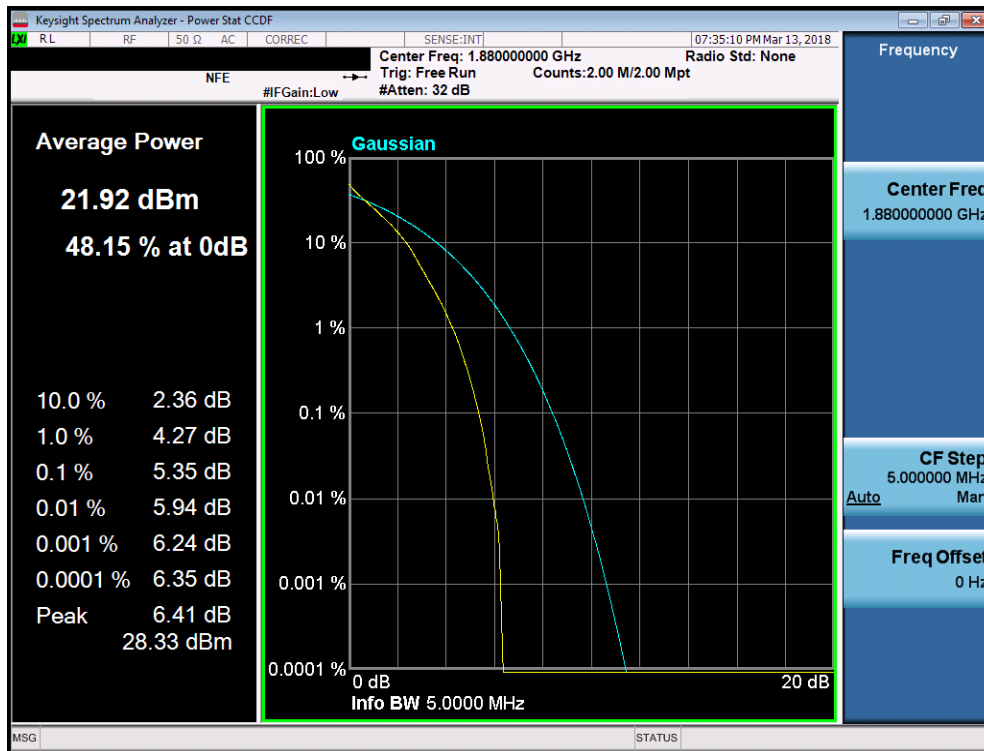


Plot 7-209. PAR Plot (Band 2 - 5.0MHz QPSK - Full RB Configuration)

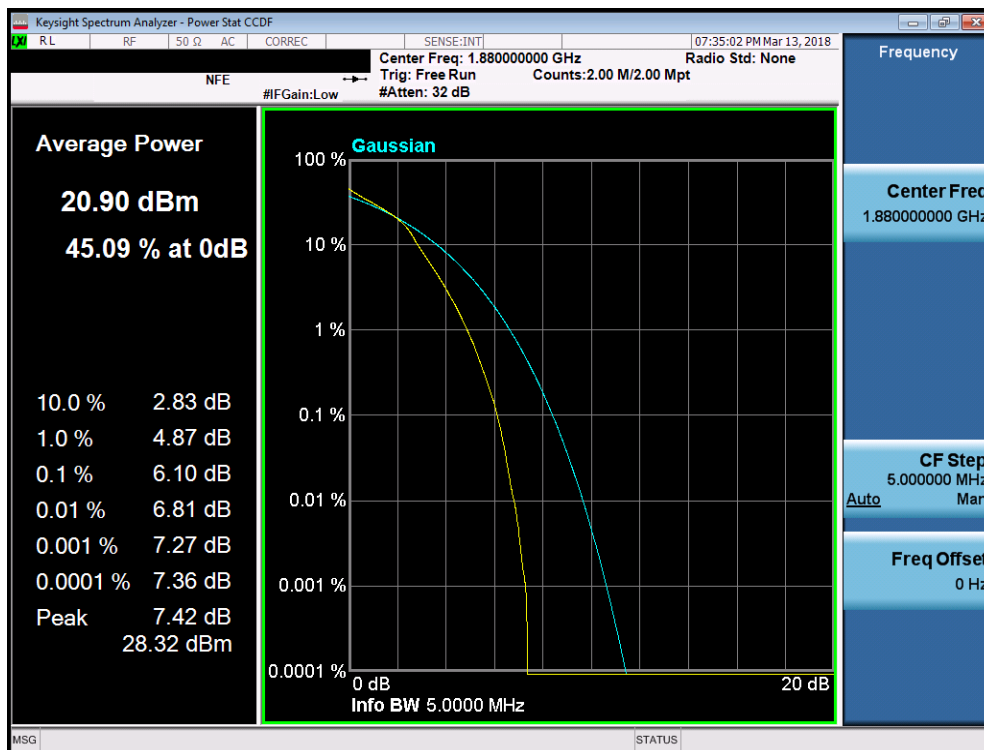


Plot 7-210. PAR Plot (Band 2 - 5.0MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMJ737T	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 128 of 167

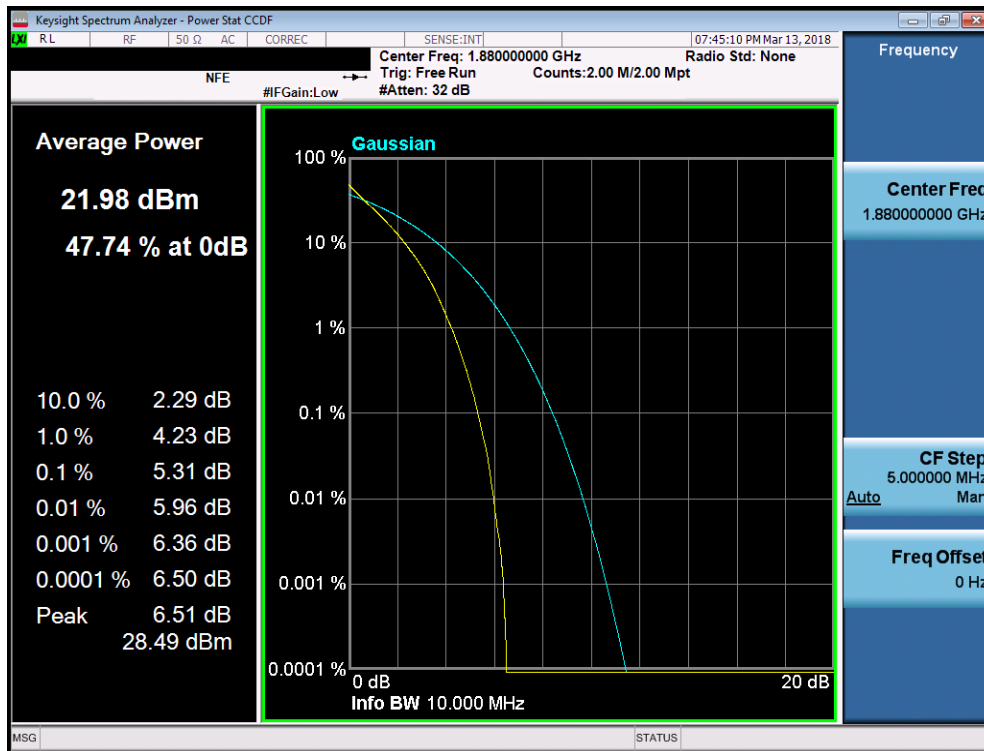


Plot 7-211. PAR Plot (Band 2 - 10.0MHz QPSK - Full RB Configuration)

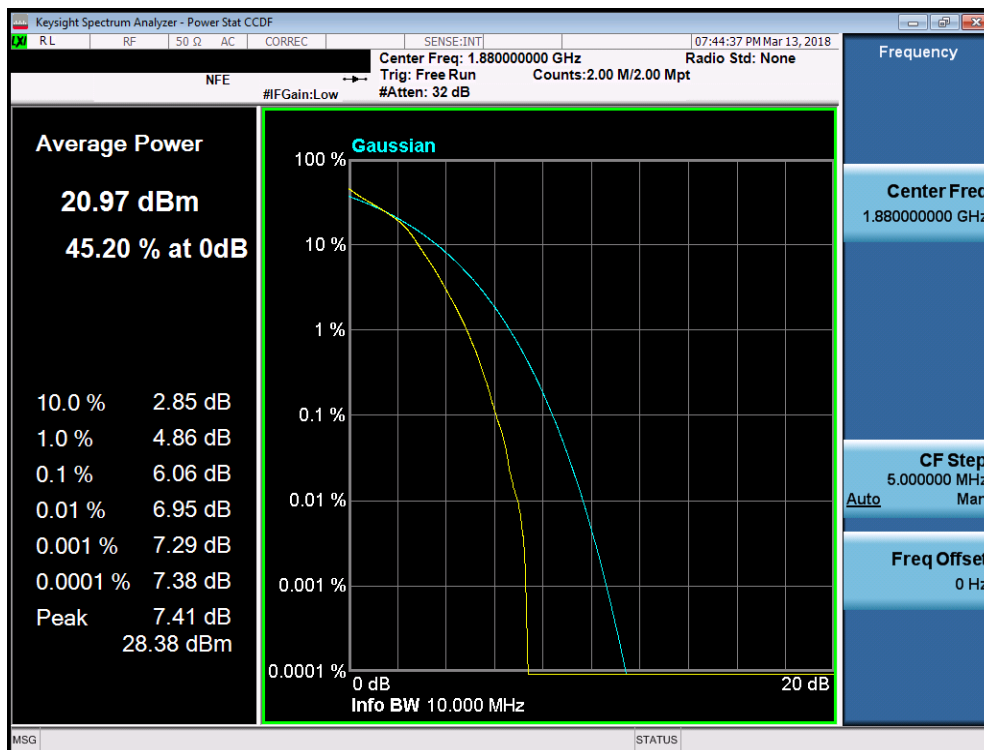


Plot 7-212. PAR Plot (Band 2 - 10.0MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMJ737T	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 129 of 167

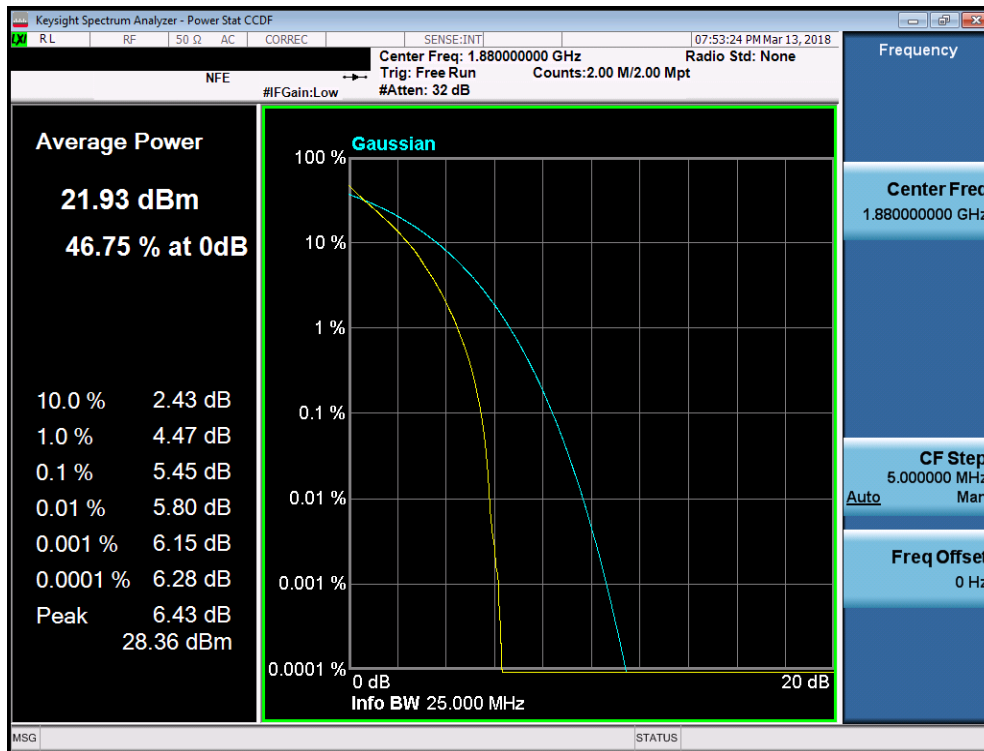


Plot 7-213. PAR Plot (Band 2 - 15.0MHz QPSK - Full RB Configuration)

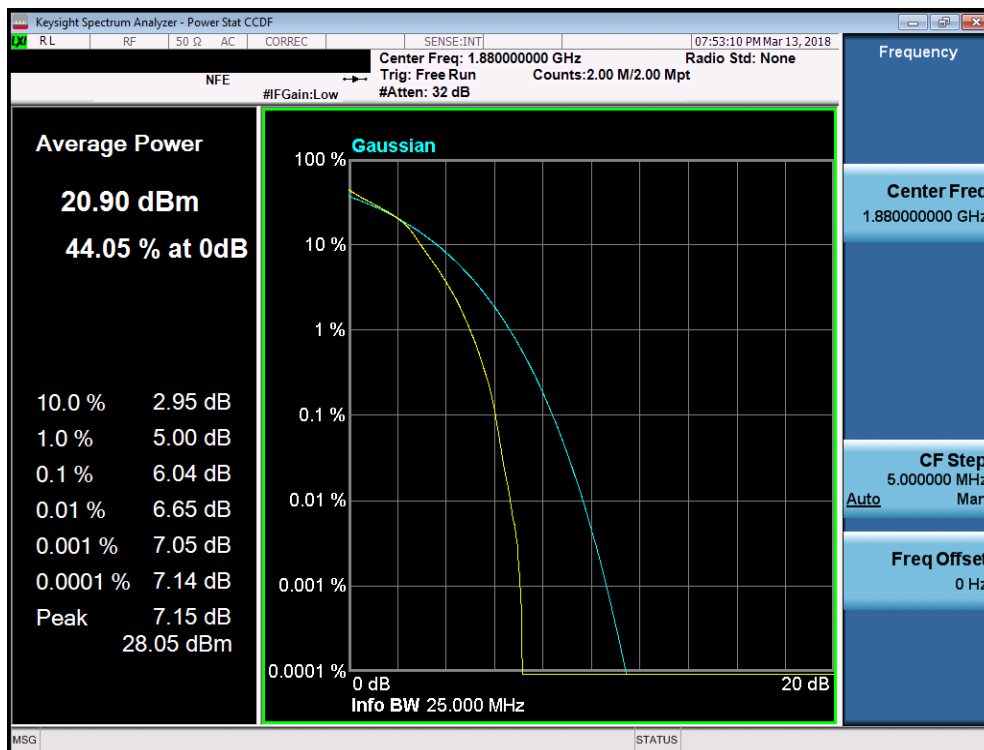


Plot 7-214. PAR Plot (Band 2 - 15.0MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMJ737T	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 130 of 167

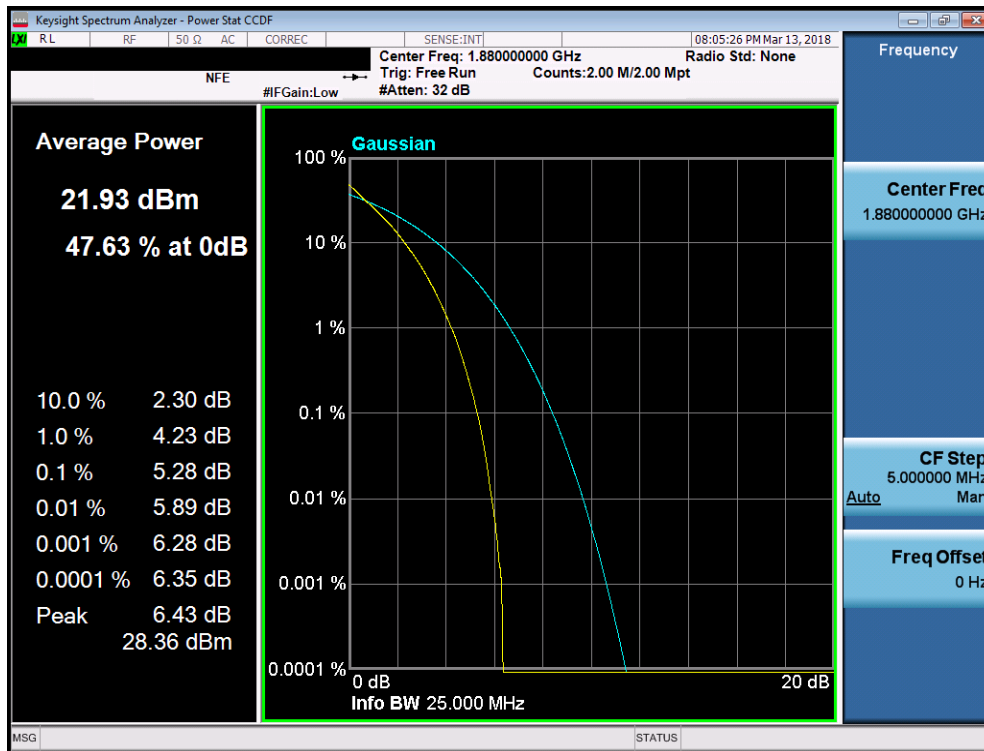

Plot 7-215. PAR Plot (Band 2 - 20.0MHz QPSK - Full RB Configuration)

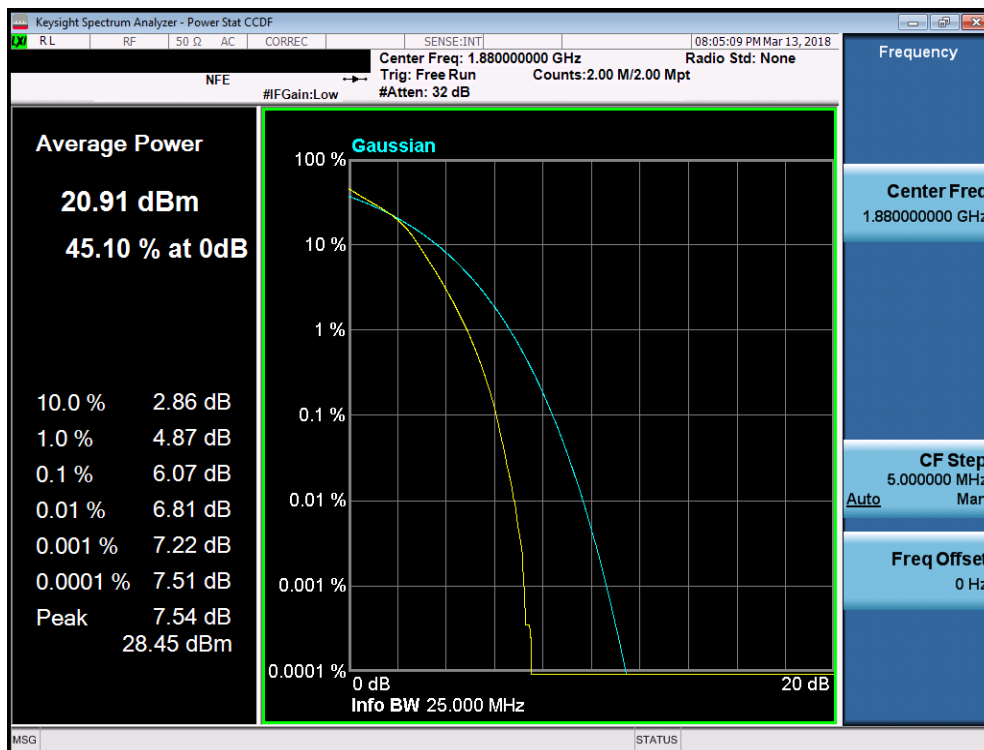

Plot 7-216. PAR Plot (Band 2 - 20.0MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 131 of 167

7.6 Radiated Power (ERP/EIRP)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMJ737T		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 132 of 167

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

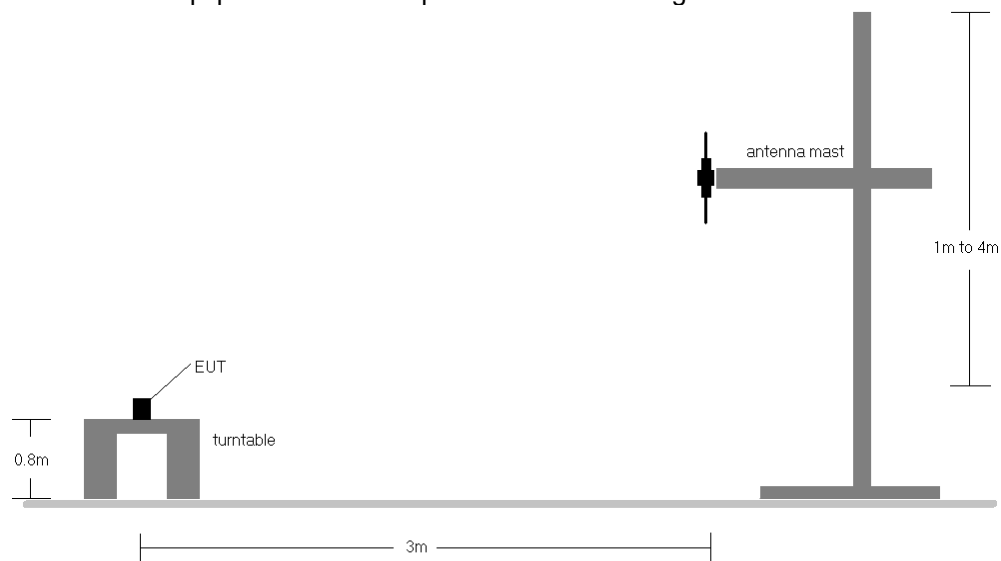


Figure 7-5. Radiated Test Setup <1GHz

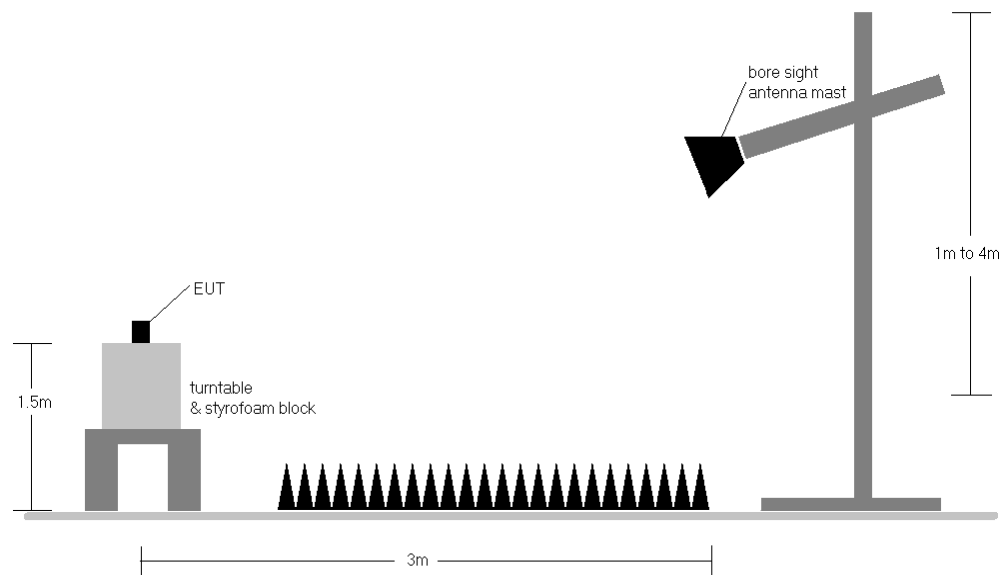


Figure 7-6. Radiated Test Setup >1GHz

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

FCC ID: A3LSMJ737T		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 133 of 167

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
665.50	5	QPSK	H	150	200	1 / 24	17.00	1.10	15.95	0.039	34.77	-18.82
680.50	5	QPSK	H	150	200	1 / 24	18.51	1.10	17.46	0.056	34.77	-17.31
695.50	5	QPSK	H	150	200	1 / 24	18.73	1.10	17.68	0.059	34.77	-17.09
695.50	5	16-QAM	H	150	200	1 / 24	17.56	1.10	16.51	0.045	34.77	-18.26
668.00	10	QPSK	H	150	196	1 / 49	18.08	1.10	17.03	0.050	34.77	-17.74
680.50	10	QPSK	H	150	196	1 / 49	18.50	1.10	17.45	0.056	34.77	-17.32
693.00	10	QPSK	H	150	196	1 / 49	18.97	1.10	17.92	0.062	34.77	-16.85
693.00	10	16-QAM	H	150	196	1 / 49	17.77	1.10	16.72	0.047	34.77	-18.05
670.50	15	QPSK	H	150	195	1 / 74	18.40	1.10	17.35	0.054	34.77	-17.42
680.50	15	QPSK	H	150	195	1 / 74	18.42	1.10	17.37	0.055	34.77	-17.40
690.50	15	QPSK	H	150	195	1 / 74	18.79	1.10	17.74	0.059	34.77	-17.03
690.50	15	16-QAM	H	150	195	1 / 74	17.62	1.10	16.57	0.045	34.77	-18.20
673.00	20	QPSK	H	150	191	1 / 99	18.73	1.10	17.68	0.059	34.77	-17.09
680.50	20	QPSK	H	150	191	1 / 99	18.02	1.10	16.97	0.050	34.77	-17.80
688.00	20	QPSK	H	150	191	1 / 99	18.81	1.10	17.76	0.060	34.77	-17.01
688.00	20	16-QAM	H	150	191	1 / 99	17.72	1.10	16.67	0.046	34.77	-18.10
693.00	10	QPSK	V	150	341	1 / 99	18.59	1.10	17.54	0.057	34.77	-17.23

Table 7-3. ERP Data (Band 71)

FCC ID: A3LSMJ737T	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 134 of 167

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
699.70	1.4	QPSK	V	150	13	3 / 2	20.32	1.10	19.27	0.085	34.77	-15.50	21.42	0.139	36.99	-15.57
707.50	1.4	QPSK	V	150	13	3 / 2	20.64	1.13	19.62	0.092	34.77	-15.15	21.77	0.150	36.99	-15.22
715.30	1.4	QPSK	V	150	13	3 / 2	20.78	1.16	19.79	0.095	34.77	-14.98	21.94	0.156	36.99	-15.05
715.30	1.4	16-QAM	V	150	13	3 / 2	20.07	1.16	19.08	0.081	34.77	-15.69	21.23	0.133	36.99	-15.76
700.50	3	QPSK	V	150	345	1 / 14	20.39	1.10	19.34	0.086	34.77	-15.43	21.49	0.141	36.99	-15.50
707.50	3	QPSK	V	150	345	1 / 14	20.75	1.13	19.73	0.094	34.77	-15.04	21.88	0.154	36.99	-15.11
714.50	3	QPSK	V	150	345	1 / 14	20.88	1.16	19.89	0.097	34.77	-14.88	22.04	0.160	36.99	-14.95
714.50	3	16-QAM	V	150	345	1 / 14	19.86	1.16	18.87	0.077	34.77	-15.90	21.02	0.126	36.99	-15.97
701.50	5	QPSK	V	150	357	1 / 24	20.42	1.11	19.38	0.087	34.77	-15.40	21.53	0.142	36.99	-15.46
707.50	5	QPSK	V	150	357	1 / 24	20.87	1.13	19.85	0.097	34.77	-14.92	22.00	0.159	36.99	-14.99
713.50	5	QPSK	V	150	357	1 / 24	20.85	1.15	19.85	0.097	34.77	-14.92	22.00	0.159	36.99	-14.99
713.50	5	16-QAM	V	150	357	1 / 24	19.94	1.15	18.94	0.078	34.77	-15.83	21.09	0.129	36.99	-15.90
704.00	10	QPSK	V	150	17	1 / 49	20.83	1.12	19.80	0.095	34.77	-14.97	21.95	0.157	36.99	-15.04
707.50	10	QPSK	V	150	17	1 / 49	20.97	1.13	19.95	0.099	34.77	-14.82	22.10	0.162	36.99	-14.89
711.00	10	QPSK	V	150	17	1 / 49	20.75	1.14	19.74	0.094	34.77	-15.03	21.89	0.155	36.99	-15.10
711.00	10	16-QAM	V	150	17	1 / 49	19.89	1.14	18.88	0.077	34.77	-15.89	21.03	0.127	36.99	-15.96
707.50	10	QPSK	H	150	341	1 / 49	19.14	1.13	18.12	0.065	34.77	-16.65	20.27	0.106	36.99	-16.72

Table 7-4. ERP Data (Band 12)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
824.70	1.4	QPSK	H	150	11	1 / 0	20.11	1.50	19.46	0.088	38.45	-18.99	21.61	0.145	40.61	-19.00
836.50	1.4	QPSK	H	150	10	1 / 0	22.06	1.50	21.41	0.138	38.45	-17.04	23.56	0.227	40.61	-17.05
848.30	1.4	QPSK	H	150	10	1 / 0	22.93	1.50	22.28	0.169	38.45	-16.17	24.43	0.277	40.61	-16.18
848.30	1.4	16-QAM	H	150	10	1 / 0	21.72	1.50	21.07	0.128	38.45	-17.38	23.22	0.210	40.61	-17.39
825.50	3	QPSK	H	150	5	1 / 0	20.26	1.50	19.61	0.091	38.45	-18.84	21.76	0.150	40.61	-18.85
836.50	3	QPSK	H	150	5	1 / 0	21.96	1.50	21.31	0.135	38.45	-17.14	23.46	0.222	40.61	-17.15
847.50	3	QPSK	H	150	5	1 / 0	22.92	1.50	22.27	0.169	38.45	-16.18	24.42	0.277	40.61	-16.19
847.50	3	16-QAM	H	150	5	1 / 0	21.59	1.50	20.94	0.124	38.45	-17.51	23.09	0.204	40.61	-17.52
826.50	5	QPSK	H	150	3	1 / 0	19.99	1.50	19.34	0.086	38.45	-19.11	21.49	0.141	40.61	-19.12
836.50	5	QPSK	H	150	3	1 / 0	21.76	1.50	21.11	0.129	38.45	-17.34	23.26	0.212	40.61	-17.35
846.50	5	QPSK	H	15	3	1 / 0	22.45	1.50	21.80	0.151	38.45	-16.65	23.95	0.248	40.61	-16.66
846.50	5	16-QAM	H	15	3	1 / 0	21.09	1.50	20.44	0.111	38.45	-18.01	22.59	0.182	40.61	-18.02
829.00	10	QPSK	H	150	3	1 / 49	21.26	1.50	20.61	0.115	38.45	-17.84	22.76	0.189	40.61	-17.85
836.50	10	QPSK	H	150	3	1 / 49	21.84	1.50	21.19	0.132	38.45	-17.26	23.34	0.216	40.61	-17.27
844.00	10	QPSK	H	150	3	1 / 49	22.44	1.50	21.79	0.151	38.45	-16.66	23.94	0.248	40.61	-16.67
844.00	10	16-QAM	H	150	3	1 / 49	21.69	1.50	21.04	0.127	38.45	-17.41	23.19	0.208	40.61	-17.42
848.30	1.4	QPSK	V	150	359	1 / 0	19.87	1.50	19.22	0.084	38.45	-19.23	21.37	0.137	40.61	-19.24

Table 7-5. ERP Data (Band 5)

FCC ID: A3LSMJ737T	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1-A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 135 of 167

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1710.70	1.4	QPSK	V	150	92	1 / 0	19.28	5.56	24.84	0.305	30.00	-5.16
1745.00	1.4	QPSK	V	150	92	6 / 0	19.84	5.32	25.16	0.328	30.00	-4.84
1779.30	1.4	QPSK	V	150	89	1 / 0	20.56	5.09	25.65	0.367	30.00	-4.35
1779.30	1.4	16-QAM	V	150	89	1 / 0	20.40	5.09	25.49	0.354	30.00	-4.51
1711.50	3	QPSK	V	150	94	1 / 0	19.33	5.55	24.88	0.308	30.00	-5.12
1745.00	3	QPSK	V	150	94	1 / 0	20.05	5.32	25.37	0.345	30.00	-4.63
1778.50	3	QPSK	V	150	94	1 / 0	20.49	5.10	25.59	0.362	30.00	-4.41
1778.50	3	16-QAM	V	150	94	1 / 0	20.24	5.10	25.34	0.342	30.00	-4.66
1712.50	5	QPSK	V	150	85	1 / 0	18.75	5.55	24.30	0.269	30.00	-5.70
1745.00	5	QPSK	V	150	85	1 / 0	19.55	5.32	24.87	0.307	30.00	-5.13
1777.50	5	QPSK	V	150	85	1 / 0	20.38	5.10	25.48	0.354	30.00	-4.52
1777.50	5	16-QAM	V	150	85	1 / 0	20.01	5.10	25.11	0.325	30.00	-4.89
1715.00	10	QPSK	V	150	93	1 / 0	19.51	5.53	25.04	0.319	30.00	-4.96
1745.00	10	QPSK	V	150	93	1 / 0	20.10	5.32	25.42	0.349	30.00	-4.58
1775.00	10	QPSK	V	150	93	1 / 0	20.26	5.12	25.38	0.345	30.00	-4.62
1745.00	10	16-QAM	V	150	93	1 / 0	19.89	5.32	25.21	0.332	30.00	-4.79
1717.50	15	QPSK	V	150	91	1 / 0	19.37	5.51	24.88	0.308	30.00	-5.12
1745.00	15	QPSK	V	150	91	1 / 0	19.77	5.32	25.09	0.323	30.00	-4.91
1772.50	15	QPSK	V	150	91	1 / 0	20.19	5.14	25.33	0.341	30.00	-4.67
1772.50	15	16-QAM	V	150	91	1 / 0	19.98	5.14	25.12	0.325	30.00	-4.88
1720.00	20	QPSK	V	150	92	1 / 99	19.51	5.49	25.00	0.316	30.00	-5.00
1745.00	20	QPSK	V	150	92	1 / 99	19.93	5.32	25.25	0.335	30.00	-4.75
1770.00	20	QPSK	V	150	92	1 / 99	20.71	5.15	25.86	0.386	30.00	-4.14
1770.00	20	16-QAM	V	150	92	1 / 99	20.20	5.15	25.35	0.343	30.00	-4.65
1770.00	20	QPSK	H	150	100	100 / 0	20.69	5.15	25.84	0.384	30.00	-4.16

Table 7-6. EIRP Data (Band 66/4)

FCC ID: A3LSMJ737T	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 136 of 167

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.70	1.4	QPSK	V	150	360	1 / 0	18.03	4.82	22.85	0.193	33.01	-10.16
1880.00	1.4	QPSK	V	150	360	1 / 0	18.00	4.74	22.74	0.188	33.01	-10.27
1909.30	1.4	QPSK	V	150	360	1 / 0	17.95	4.68	22.63	0.183	33.01	-10.38
1850.70	1.4	16-QAM	V	150	360	1 / 0	17.17	4.82	21.99	0.158	33.01	-11.02
1851.50	3	QPSK	V	150	359	1 / 0	18.17	4.82	22.99	0.199	33.01	-10.02
1880.00	3	QPSK	V	150	359	1 / 0	18.02	4.74	22.76	0.189	33.01	-10.25
1908.50	3	QPSK	V	150	359	1 / 0	18.12	4.68	22.80	0.191	33.01	-10.21
1851.50	3	16-QAM	V	150	359	1 / 0	17.28	4.82	22.10	0.162	33.01	-10.91
1852.50	5	QPSK	V	150	1	1 / 0	18.16	4.81	22.97	0.198	33.01	-10.04
1880.00	5	QPSK	V	150	1	1 / 0	18.08	4.74	22.82	0.191	33.01	-10.19
1907.50	5	QPSK	V	150	1	1 / 0	17.95	4.68	22.63	0.183	33.01	-10.38
1907.50	5	16-QAM	V	150	1	1 / 0	16.87	4.68	21.55	0.143	33.01	-11.46
1855.00	10	QPSK	V	150	352	1 / 0	18.28	4.81	23.09	0.204	33.01	-9.92
1880.00	10	QPSK	V	150	352	1 / 0	18.15	4.74	22.89	0.195	33.01	-10.12
1905.00	10	QPSK	V	150	352	1 / 0	17.98	4.68	22.66	0.185	33.01	-10.35
1855.00	10	16-QAM	V	150	352	1 / 0	17.00	4.81	21.81	0.152	33.01	-11.20
1857.50	15	QPSK	V	150	360	1 / 0	18.97	4.80	23.77	0.238	33.01	-9.24
1880.00	15	QPSK	V	150	360	1 / 0	18.52	4.74	23.26	0.212	33.01	-9.75
1902.50	15	QPSK	V	150	360	1 / 0	18.20	4.69	22.89	0.194	33.01	-10.12
1857.50	15	16-QAM	V	150	360	1 / 0	17.70	4.80	22.50	0.178	33.01	-10.51
1860.00	20	QPSK	V	150	355	1 / 0	18.48	4.79	23.27	0.212	33.01	-9.74
1880.00	20	QPSK	V	150	355	1 / 0	18.25	4.74	22.99	0.199	33.01	-10.02
1900.00	20	QPSK	V	150	355	1 / 0	17.83	4.69	22.52	0.179	33.01	-10.49
1860.00	20	16-QAM	V	150	355	1 / 0	17.32	4.79	22.11	0.163	33.01	-10.90
1857.50	15	QPSK	H	150	247	1 / 0	18.16	4.80	22.96	0.198	33.01	-10.05

Table 7-7. EIRP Data (Band 2)

FCC ID: A3LSMJ737T	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 137 of 167

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
2502.50	5	QPSK	H	150	341	1 / 24	17.40	5.74	23.14	0.206	33.01	-9.87
2535.00	5	QPSK	H	150	341	1 / 24	18.27	5.86	24.13	0.259	33.01	-8.88
2567.50	5	QPSK	H	150	341	1 / 24	18.42	5.98	24.40	0.275	33.01	-8.61
2567.50	5	16-QAM	H	150	341	1 / 24	17.37	5.98	23.35	0.216	33.01	-9.66
2505.00	10	QPSK	H	150	343	1 / 49	17.77	5.75	23.52	0.225	33.01	-9.49
2535.00	10	QPSK	H	150	343	1 / 0	18.34	5.86	24.20	0.263	33.01	-8.81
2565.00	10	QPSK	H	150	343	1 / 49	18.35	5.97	24.32	0.270	33.01	-8.69
2565.00	10	16-QAM	H	150	343	1 / 49	17.18	5.97	23.15	0.207	33.01	-9.86
2507.50	15	QPSK	H	150	341	1 / 74	17.78	5.76	23.54	0.226	33.01	-9.47
2535.00	15	QPSK	H	150	341	1 / 74	18.47	5.86	24.33	0.271	33.01	-8.68
2562.50	15	QPSK	H	150	341	1 / 74	18.61	5.96	24.57	0.287	33.01	-8.44
2562.50	15	16-QAM	H	150	341	1 / 74	17.16	5.96	23.12	0.205	33.01	-9.89
2510.00	20	QPSK	H	150	343	1 / 99	18.16	5.77	23.93	0.247	33.01	-9.08
2535.00	20	QPSK	H	150	343	1 / 99	18.63	5.86	24.49	0.281	33.01	-8.52
2560.00	20	QPSK	H	150	343	1 / 99	18.69	5.95	24.64	0.291	33.01	-8.37
2560.00	20	16-QAM	H	150	343	1 / 99	17.34	5.95	23.29	0.213	33.01	-9.72
2560.00	20	QPSK	V	150	58	1 / 0	13.92	5.95	19.87	0.097	33.01	-13.14

Table 7-8. EIRP Data (Band 7)

FCC ID: A3LSMJ737T	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 138 of 167

7.7 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas.

Test Procedures Used

KDB 971168 D01 v03 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: A3LSMJ737T		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 139 of 167	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

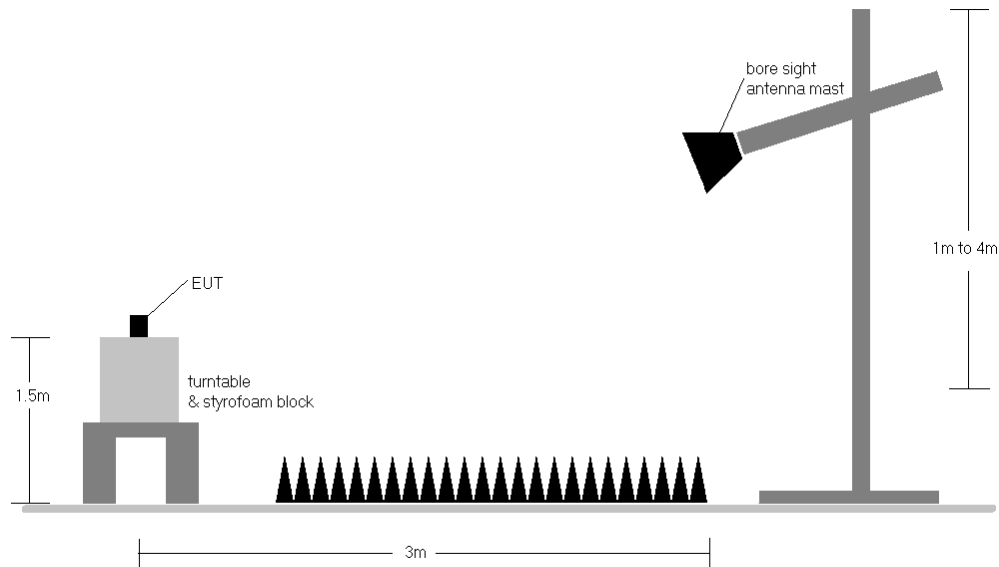



Figure 7-7. Test Instrument & Measurement Setup

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 5) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: A3LSMJ737T		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 140 of 167

Band 71

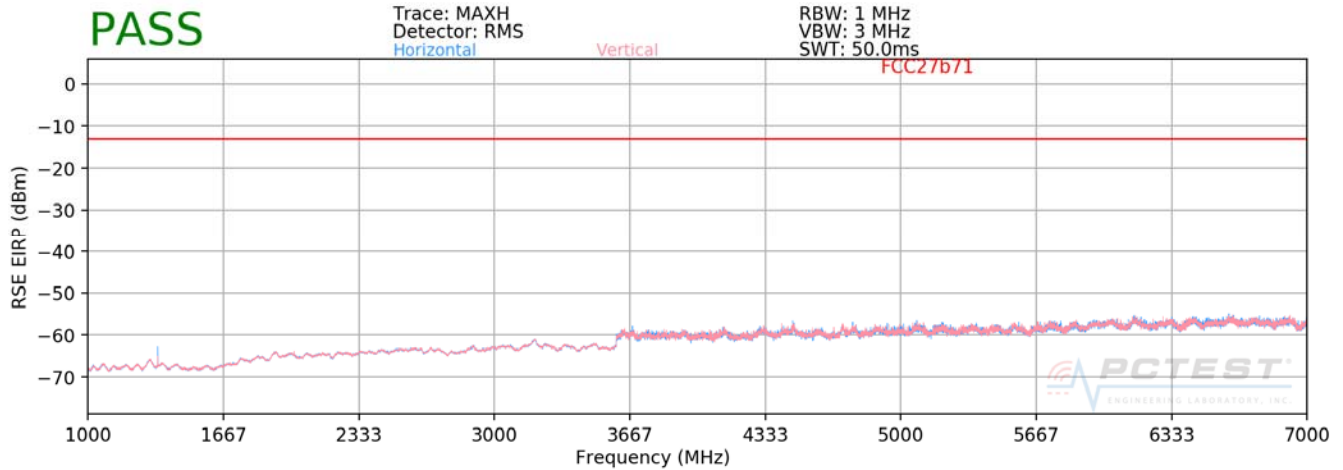

Plot 7-217. Radiated Spurious Plot above 1GHz (Band 71)

OPERATING FREQUENCY: 673.00 MHz

CHANNEL: 133222

MODULATION SIGNAL: QPSK

BANDWIDTH: 20.0 MHz

DISTANCE: 3 meters

LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1346.00	H	206	50	-63.70	3.87	-59.83	-46.8
2019.00	H	395	157	-69.17	4.74	-64.43	-51.4
2692.00	H	181	22	-69.63	6.50	-63.12	-50.1
3365.00	H	-	-	-71.54	7.93	-63.61	-50.6
4038.00	H	-	-	-71.95	9.07	-62.88	-49.9

Table 7-9. Radiated Spurious Data (Band 71 – Low Channel)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 141 of 167

OPERATING FREQUENCY: 680.50 MHz
CHANNEL: 133297
MODULATION SIGNAL: QPSK
BANDWIDTH: 20.0 MHz
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1361.00	H	125	44	-64.76	4.00	-60.76	-47.8
2041.50	H	11	2	-68.95	4.89	-64.06	-51.1
2722.00	H	112	17	-70.42	6.64	-63.79	-50.8
3402.50	H	-	-	-71.06	7.99	-63.07	-50.1
4083.00	H	-	-	-72.03	9.05	-62.98	-50.0

Table 7-10. Radiated Spurious Data (Band 71 – Mid Channel)


OPERATING FREQUENCY: 688.00 MHz
CHANNEL: 133372
MODULATION SIGNAL: QPSK
BANDWIDTH: 20.0 MHz
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1376.00	H	172	47	-67.99	8.00	-59.99	-47.0
2064.00	H	158	16	-69.69	8.75	-60.94	-47.9
2752.00	H	104	39	-75.83	9.73	-66.10	-53.1
3440.00	H	-	-	-74.06	9.48	-64.58	-51.6

Table 7-11. Radiated Spurious Data (Band 71 – High Channel)

FCC ID: A3LSMJ737T		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 142 of 167

Band 12

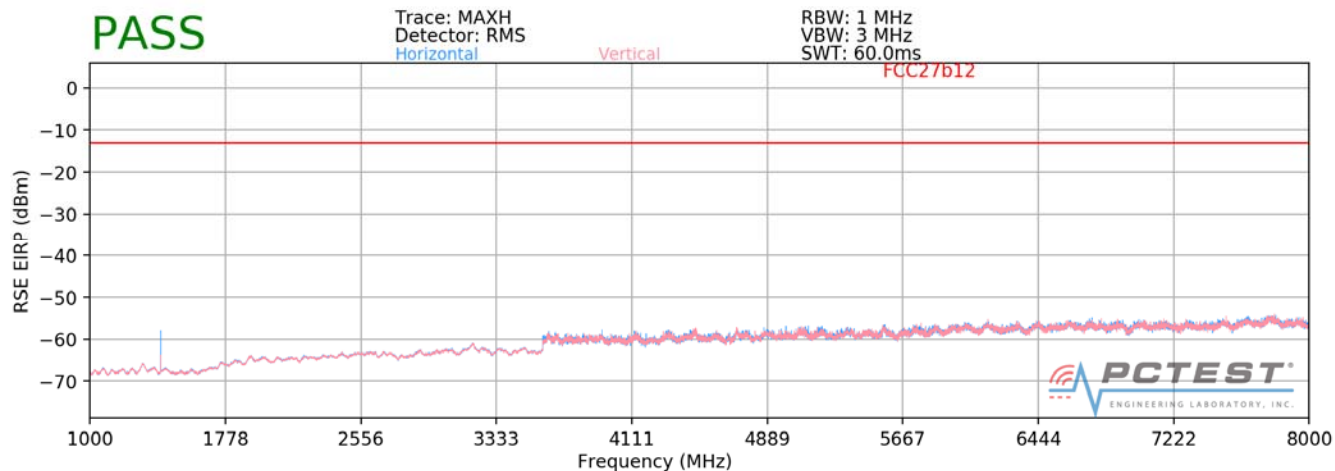

Plot 7-218. Radiated Spurious Plot above 1GHz (Band 12)

OPERATING FREQUENCY: 704.00 MHz

CHANNEL: 23060

MODULATION SIGNAL: QPSK

BANDWIDTH: 10.0 MHz

DISTANCE: 3 meters

LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1408.00	H	149	135	-62.30	8.00	-54.29	-41.3
2112.00	H	200	186	-73.96	8.89	-65.06	-52.1
2816.00	H	-	-	-77.82	10.10	-67.72	-54.7

Table 7-12. Radiated Spurious Data (Band 12 – Low Channel)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 143 of 167

OPERATING FREQUENCY: 707.50 MHz
 CHANNEL: 23095
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1415.00	H	153	132	-62.11	8.09	-54.02	-41.0
2122.50	H	104	221	-74.24	8.88	-65.36	-52.4
2830.00	H	173	211	-76.25	10.13	-66.12	-53.1
3537.50	H	-	-	-74.41	9.69	-64.71	-51.7

Table 7-13. Radiated Spurious Data (Band 12 – Mid Channel)


OPERATING FREQUENCY: 711.00 MHz
 CHANNEL: 23130
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1422.00	H	100	129	-60.87	8.17	-52.70	-39.7
2133.00	H	188	188	-72.73	8.87	-63.86	-50.9
2844.00	H	140	203	-75.97	10.16	-65.80	-52.8
3555.00	H	-	-	-74.62	9.71	-64.91	-51.9

Table 7-14. Radiated Spurious Data (Band 12 – High Channel)

FCC ID: A3LSMJ737T		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 144 of 167

Band 5

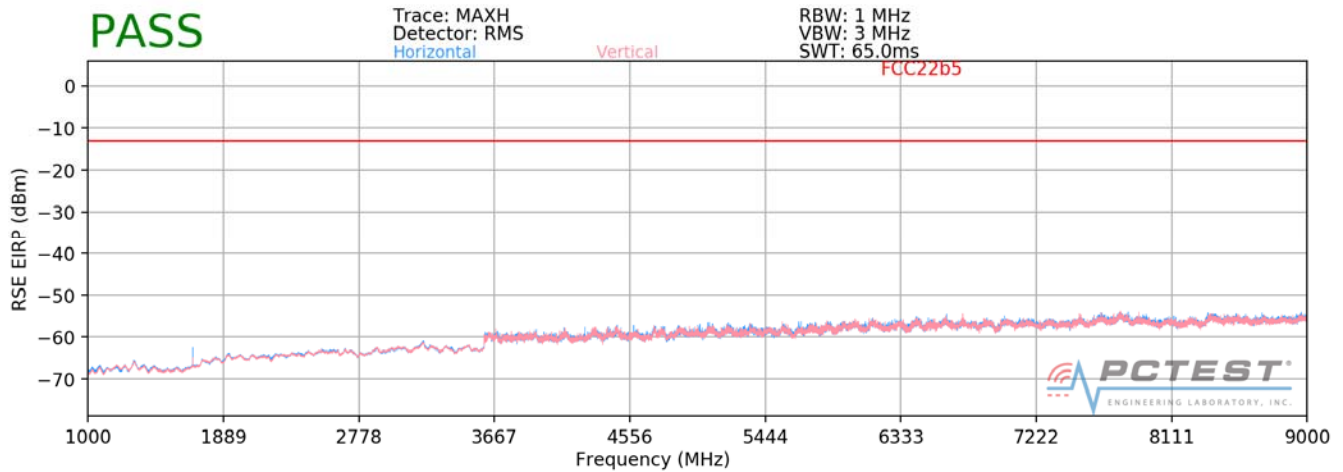

Plot 7-219. Radiated Spurious Plot above 1GHz (Band 5)

OPERATING FREQUENCY: 824.70 MHz

CHANNEL: 20407

MODULATION SIGNAL: QPSK

BANDWIDTH: 1.4 MHz

DISTANCE: 3 meters

LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1649.40	H	120	41	-73.39	9.01	-64.38	-51.4
2474.10	H	113	50	-74.19	9.12	-65.07	-52.1
3298.80	H	-	-	-74.93	9.37	-65.56	-52.6

Table 7-15. Radiated Spurious Data (Band 5 – Low Channel)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 145 of 167

OPERATING FREQUENCY: 836.50 MHz
CHANNEL: 20525
MODULATION SIGNAL: QPSK
BANDWIDTH: 1.4 MHz
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.00	H	144	144	-73.57	8.85	-64.72	-51.7
2509.50	H	139	52	-75.98	9.17	-66.81	-53.8
3346.00	H	-	-	-75.24	9.36	-65.88	-52.9

Table 7-16. Radiated Spurious Data (Band 5 – Mid Channel)

OPERATING FREQUENCY: 848.30 MHz
CHANNEL: 20643
MODULATION SIGNAL: QPSK
BANDWIDTH: 1.4 MHz
DISTANCE: 3 meters
LIMIT: -13 dBm


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1696.60	H	177	147	-70.48	8.68	-61.80	-48.8
2544.90	H	149	49	-76.32	9.27	-67.05	-54.0
3393.20	H	-	-	-73.87	9.46	-64.41	-51.4

Table 7-17. Radiated Spurious Data (Band 5 – High Channel)

FCC ID: A3LSMJ737T		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 146 of 167

Band 66/4

FCC27b66

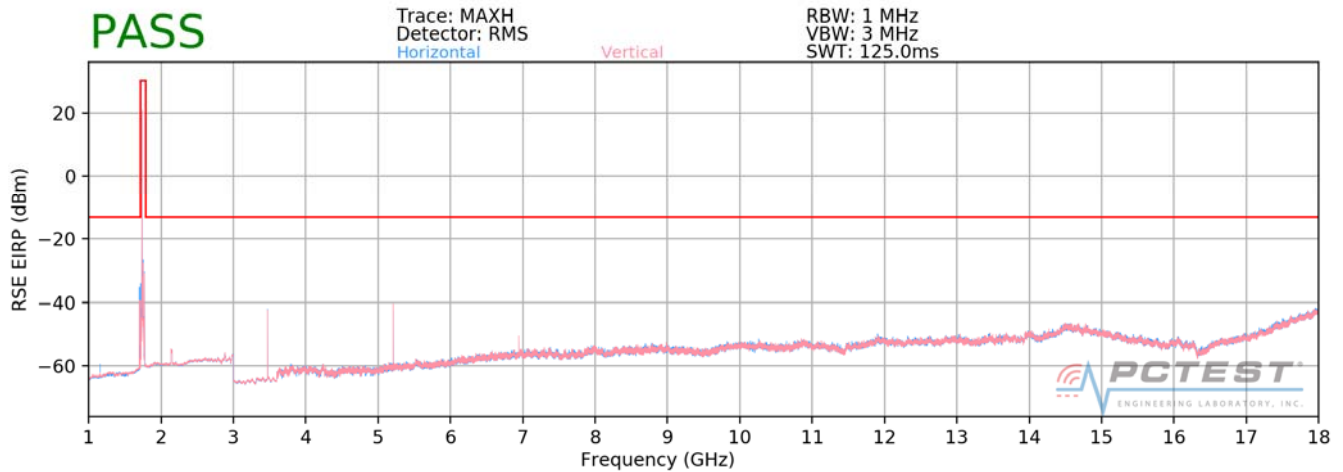

Plot 7-220. Radiated Spurious Plot above 1GHz (Band 66/4)

OPERATING FREQUENCY: 1720.00 MHz

CHANNEL: 132072

MODULATION SIGNAL: QPSK

BANDWIDTH: 20.0 MHz

DISTANCE: 3 meters

LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3440.00	H	104	172	-45.52	9.54	-35.98	-23.0
5160.00	H	113	38	-55.41	10.79	-44.61	-31.6
6880.00	H	130	24	-57.45	10.86	-46.60	-33.6
8600.00	H	104	185	-68.99	11.69	-57.30	-44.3
10320.00	H	-	-	-68.38	12.49	-55.88	-42.9

Table 7-18. Radiated Spurious Data (Band 66/4 – Low Channel)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 147 of 167

OPERATING FREQUENCY: 1745.00 MHz
CHANNEL: 132322
MODULATION SIGNAL: QPSK
BANDWIDTH: 20.0 MHz
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3490.00	H	131	172	-47.63	9.65	-37.98	-25.0
5235.00	H	100	188	-49.26	10.93	-38.33	-25.3
6980.00	H	100	22	-59.09	10.96	-48.13	-35.1
8725.00	H	-	-	-69.01	11.83	-57.18	-44.2

Table 7-19. Radiated Spurious Data (Band 66/4 – Mid Channel)

OPERATING FREQUENCY: 1770.00 MHz
CHANNEL: 132572
MODULATION SIGNAL: QPSK
BANDWIDTH: 20.0 MHz
DISTANCE: 3 meters
LIMIT: -13 dBm


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3540.00	H	130	173	-50.54	9.69	-40.84	-27.8
5310.00	H	100	182	-44.92	10.97	-33.96	-21.0
7080.00	H	104	312	-58.07	11.01	-47.06	-34.1
8850.00	H	-	-	-68.95	11.95	-57.00	-44.0

Table 7-20. Radiated Spurious Data (Band 66/4 – High Channel)

FCC ID: A3LSMJ737T		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 148 of 167

Band 2

FCC24b2

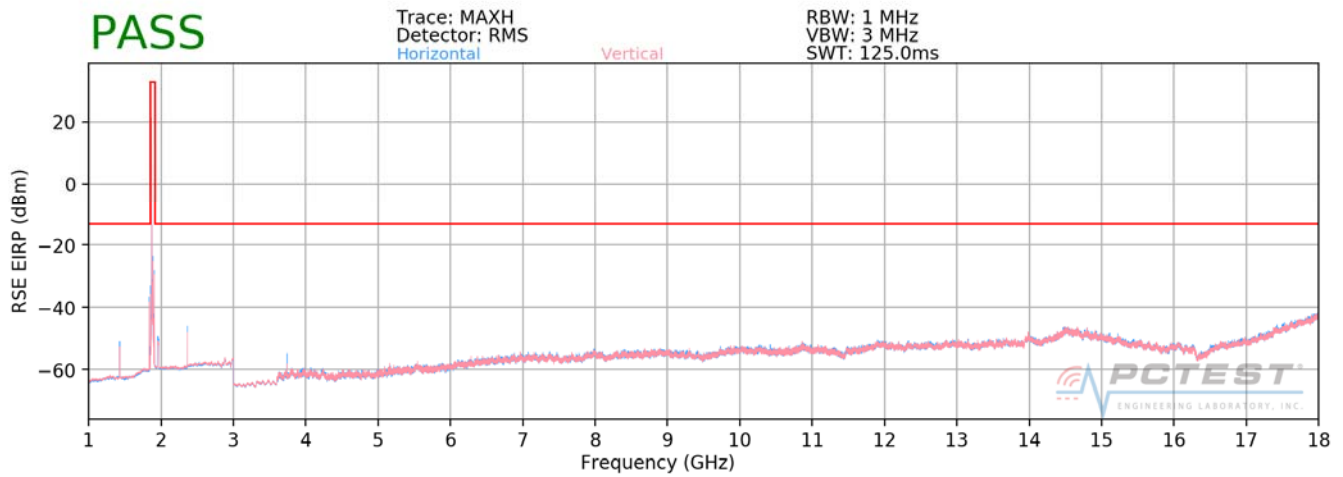

Plot 7-221. Radiated Spurious Plot above 1GHz (Band 2)

OPERATING FREQUENCY: 1857.50 MHz

CHANNEL: 18675

MODULATION SIGNAL: QPSK

BANDWIDTH: 15.0 MHz

DISTANCE: 3 meters

LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3715.00	H	120	38	-56.77	9.68	-47.09	-34.1
5572.50	H	100	111	-66.68	11.02	-55.66	-42.7
7430.00	H	107	141	-67.38	10.84	-56.55	-43.5
9287.50	H	-	-	-69.76	12.29	-57.48	-44.5
11145.00	H	-	-	-68.58	12.97	-55.61	-42.6

Table 7-21. Radiated Spurious Data (Band 2 – Low Channel)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset			Page 149 of 167

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 18900
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	104	38	-63.42	9.50	-53.92	-40.9
5640.00	H	104	106	-69.47	11.16	-58.31	-45.3
7520.00	H	256	155	-69.55	11.03	-58.52	-45.5
9400.00	H	-	-	-70.44	12.19	-58.25	-45.3
11280.00	H	-	-	-70.01	13.15	-56.86	-43.9

Table 7-22. Radiated Spurious Data (Band 2 – Mid Channel)

OPERATING FREQUENCY: 1902.50 MHz
 CHANNEL: 19125
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3805.00	H	100	38	-59.94	9.33	-50.60	-37.6
5707.50	H	103	108	-72.00	11.31	-60.69	-47.7
7610.00	H	-	-	-69.68	11.23	-58.45	-45.5
9512.50	H	-	-	-69.64	12.21	-57.43	-44.4

Table 7-23. Radiated Spurious Data (Band 2 – High Channel)


FCC ID: A3LSMJ737T		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 150 of 167

Band 7

FCC27b7

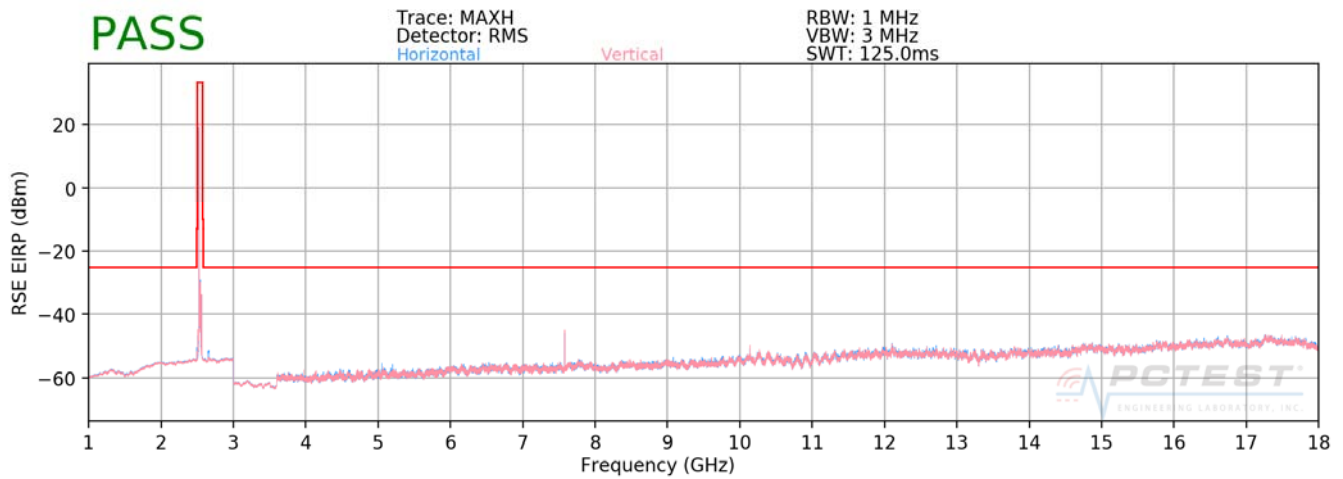


Plot 7-222. Radiated Spurious Plot 1GHz - 18GHz (Band 7)

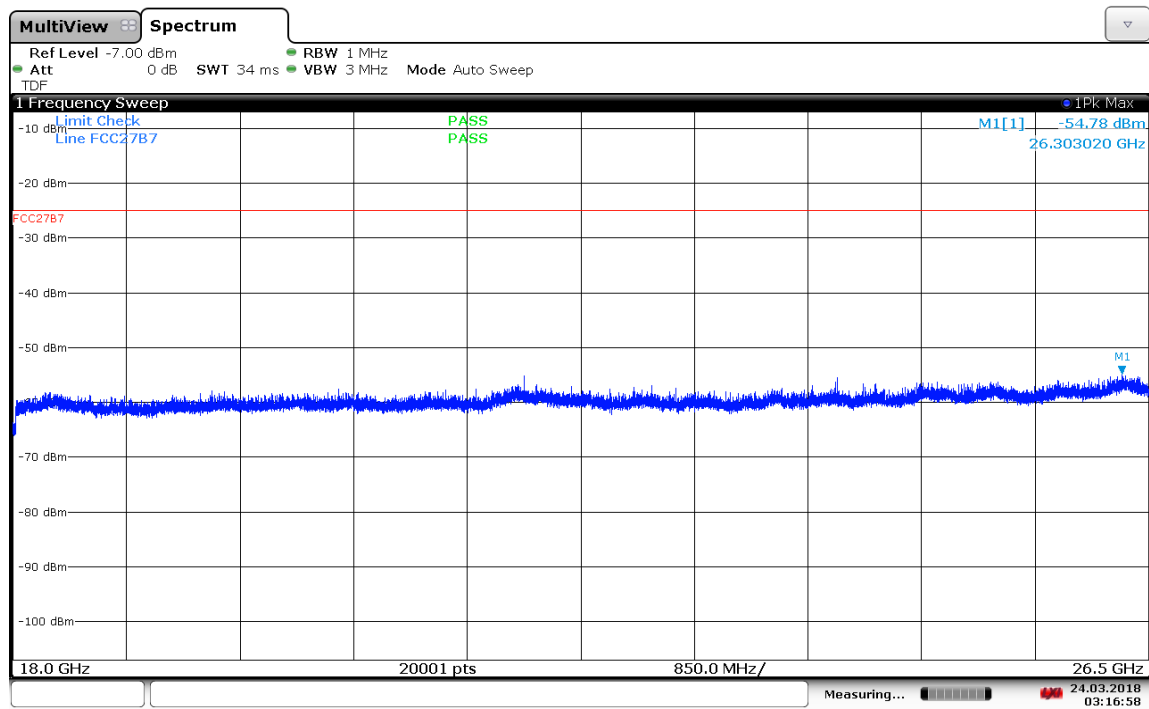

03:16:59 24.03.2018

Plot 7-223. Radiated Spurious Plot 18GHz – 26.5GHz (Band 7) – Horizontal

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 151 of 167

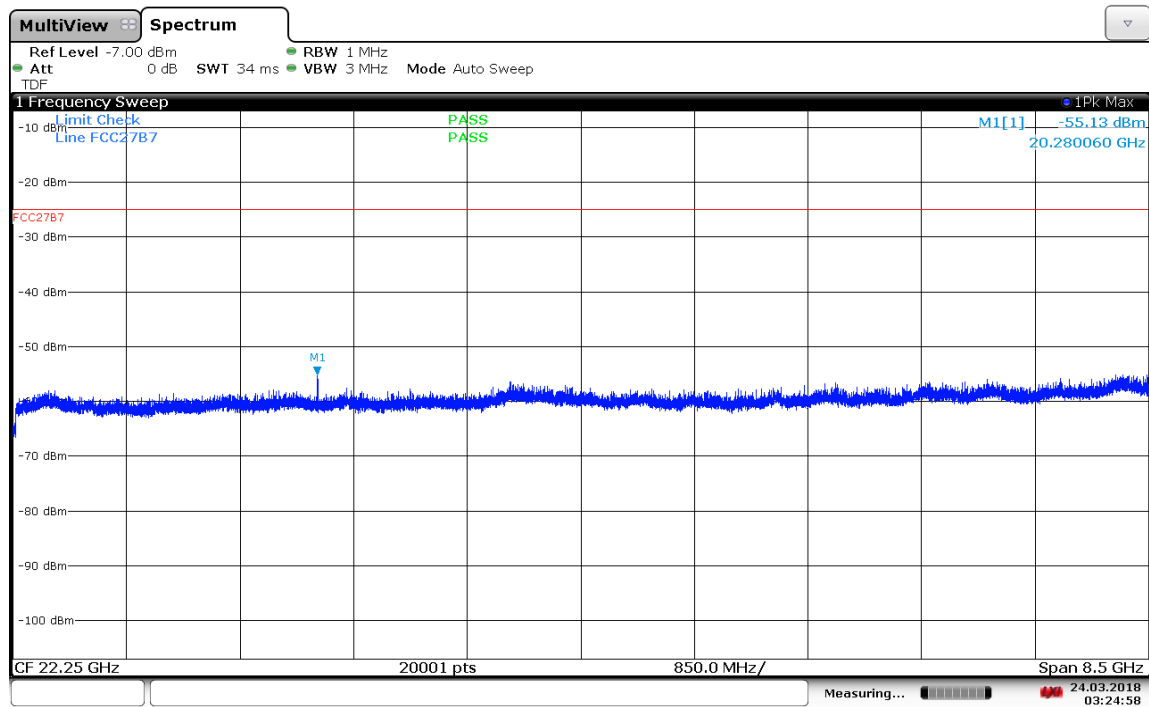

03:24:59 24.03.2018

Plot 7-224. Radiated Spurious Plot 18GHz – 26.5GHz (Band 7) – Vertical

OPERATING FREQUENCY: 2510.00 MHz
CHANNEL: 20850
MODULATION SIGNAL: QPSK
BANDWIDTH: 20.0 MHz
DISTANCE: 3 meters
LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5020.00	V	115	355	-66.51	11.09	-55.42	-30.4
7530.00	V	100	318	-49.04	11.05	-37.99	-13.0
10040.00	V	394	7	-65.49	12.18	-53.31	-28.3
12550.00	V	-	-	-67.41	12.80	-54.61	-29.6

Table 7-24. Radiated Spurious Data (Band 7 – Low Channel)

FCC ID: A3LSMJ737T	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 152 of 167

OPERATING FREQUENCY: 2535.00 MHz
 CHANNEL: 21100
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5070.00	V	117	173	-68.58	10.91	-57.67	-32.7
7605.00	V	100	319	-50.11	11.22	-38.89	-13.9
10140.00	V	261	52	-67.51	12.28	-55.23	-30.2
12675.00	V	-	-	-66.61	12.91	-53.70	-28.7

Table 7-25. Radiated Spurious Data (Band 7 – Mid Channel)

OPERATING FREQUENCY: 2560.00 MHz
 CHANNEL: 21350
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5120.00	V	100	348	-71.32	10.84	-60.48	-35.5
7680.00	V	100	316	-53.11	11.34	-41.77	-16.8
10240.00	V	325	12	-65.78	12.42	-53.37	-28.4
12800.00	V	-	-	-66.90	12.91	-53.99	-29.0

Table 7-26. Radiated Spurious Data (Band 7 – High Channel)

FCC ID: A3LSMJ737T		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 153 of 167

7.8 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24, Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: A3LSMJ737T		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 154 of 167

Band 71 Frequency Stability Measurements

OPERATING FREQUENCY: 680,500,000 Hz
CHANNEL: 133297
REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	680,499,804	-196	-0.0000288
100 %		- 30	680,500,079	79	0.0000116
100 %		- 20	680,500,444	444	0.0000652
100 %		- 10	680,500,045	45	0.0000066
100 %		0	680,499,859	-141	-0.0000207
100 %		+ 10	680,499,892	-108	-0.0000159
100 %		+ 20	680,499,756	-244	-0.0000359
100 %		+ 30	680,500,165	165	0.0000242
100 %		+ 40	680,499,926	-74	-0.0000109
100 %		+ 50	680,499,898	-102	-0.0000150
BATT. ENDPOINT	3.45	+ 20	680,499,926	-74	-0.0000109

Table 7-27. Frequency Stability Data (Band 71)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMJ737T	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 155 of 167

Band 71 Frequency Stability Measurements

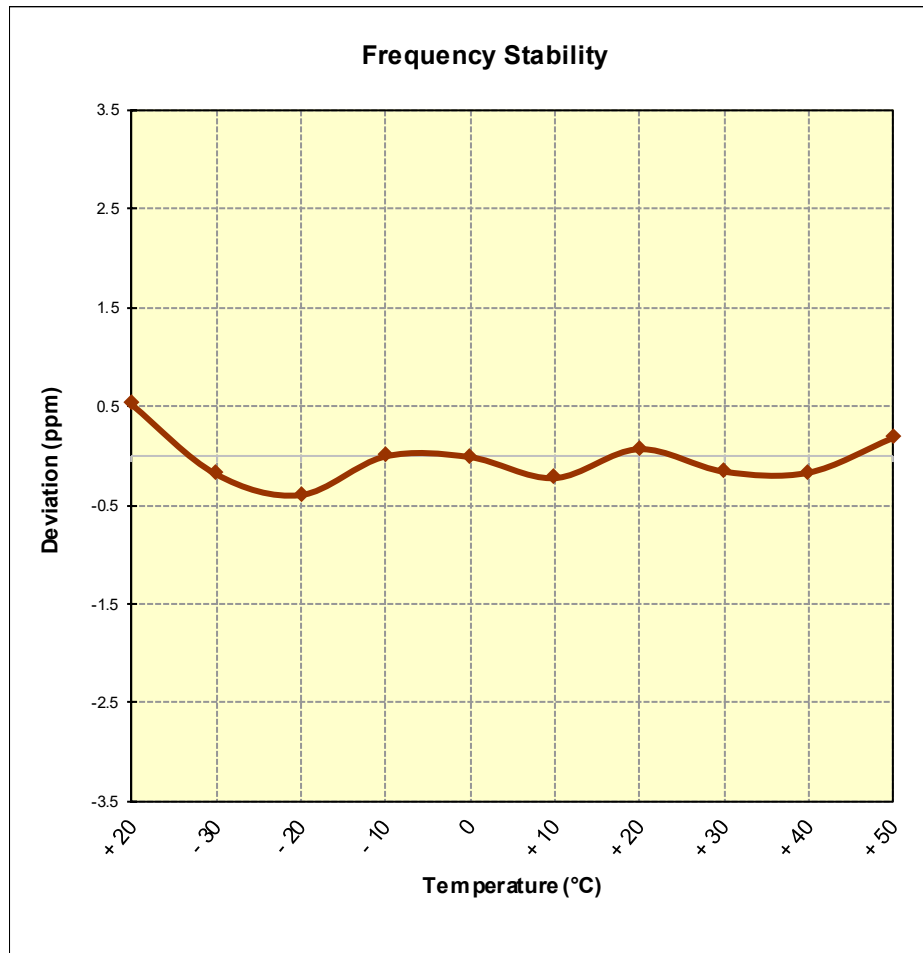


Figure 7-8. Frequency Stability Graph (Band 71)

FCC ID: A3LSMJ737T		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 156 of 167	

Band 12 Frequency Stability Measurements

OPERATING FREQUENCY: 707,500,000 Hz
 CHANNEL: 23790
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	707,500,373	373	0.0000527
100 %		- 30	707,499,873	-127	-0.0000180
100 %		- 20	707,499,723	-277	-0.0000392
100 %		- 10	707,499,998	-2	-0.0000003
100 %		0	707,499,994	-6	-0.0000008
100 %		+ 10	707,499,844	-156	-0.0000220
100 %		+ 20	707,500,051	51	0.0000072
100 %		+ 30	707,499,891	-109	-0.0000154
100 %		+ 40	707,499,883	-117	-0.0000165
100 %		+ 50	707,500,130	130	0.0000184
BATT. ENDPOINT	3.45	+ 20	707,500,080	80	0.0000113

Table 7-28. Frequency Stability Data (Band 12)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMJ737T	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 157 of 167

Band 12 Frequency Stability Measurements

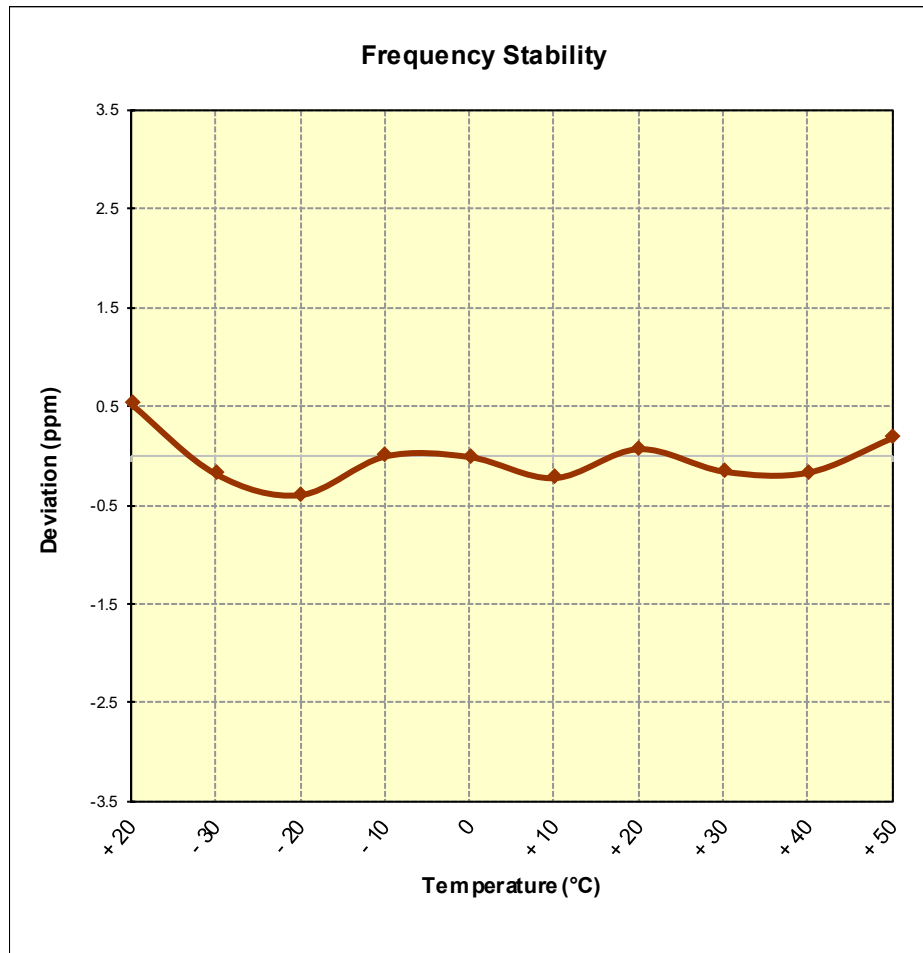


Figure 7-9. Frequency Stability Graph (Band 12)

FCC ID: A3LSMJ737T		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 158 of 167	

Band 5 Frequency Stability Measurements

OPERATING FREQUENCY: 836,500,000 Hz

CHANNEL: 20525

REFERENCE VOLTAGE: 3.85 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	836,499,733	-267	-0.0000319
100 %		- 30	836,499,871	-129	-0.0000154
100 %		- 20	836,500,316	316	0.0000378
100 %		- 10	836,500,164	164	0.0000196
100 %		0	836,499,898	-102	-0.0000122
100 %		+ 10	836,499,940	-60	-0.0000072
100 %		+ 20	836,499,957	-43	-0.0000051
100 %		+ 30	836,500,044	44	0.0000053
100 %		+ 40	836,500,371	371	0.0000444
100 %		+ 50	836,499,948	-52	-0.0000062
BATT. ENDPOINT	3.45	+ 20	836,500,177	177	0.0000212

Table 7-29. Frequency Stability Data (Band 5)

FCC ID: A3LSMJ737T		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 159 of 167	

Band 5 Frequency Stability Measurements

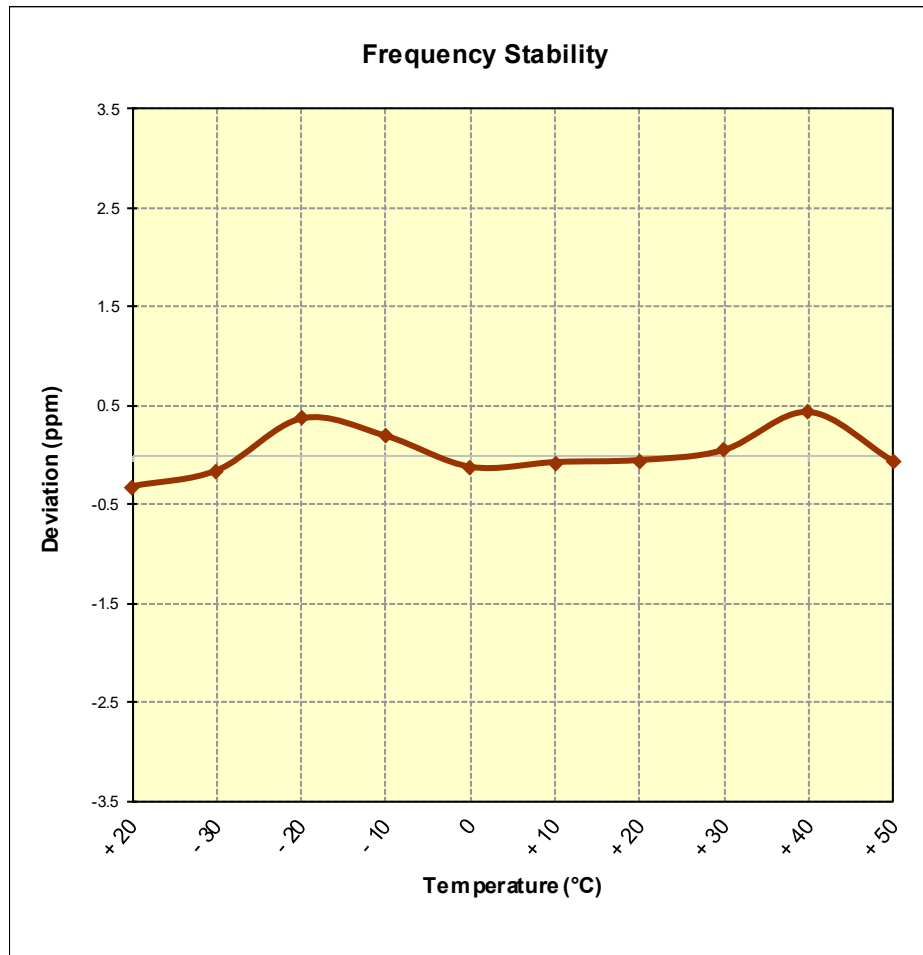


Figure 7-10. Frequency Stability Graph (Band 5)

FCC ID: A3LSMJ737T		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 160 of 167	

Band 66/4 Frequency Stability Measurements

OPERATING FREQUENCY: 1,745,000,000 Hz
 CHANNEL: 132322
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,745,000,025	25	0.0000014
100 %		- 30	1,745,000,408	408	0.0000234
100 %		- 20	1,745,000,105	105	0.0000060
100 %		- 10	1,744,999,798	-202	-0.0000116
100 %		0	1,745,000,089	89	0.0000051
100 %		+ 10	1,745,000,407	407	0.0000233
100 %		+ 20	1,744,999,894	-106	-0.0000061
100 %		+ 30	1,744,999,867	-133	-0.0000076
100 %		+ 40	1,744,999,701	-299	-0.0000171
100 %		+ 50	1,744,999,711	-289	-0.0000166
BATT. ENDPOINT	3.45	+ 20	1,745,000,106	106	0.0000061

Table 7-30. Frequency Stability Data (Band 66/4)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMJ737T	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 161 of 167

Band 66/4 Frequency Stability Measurements

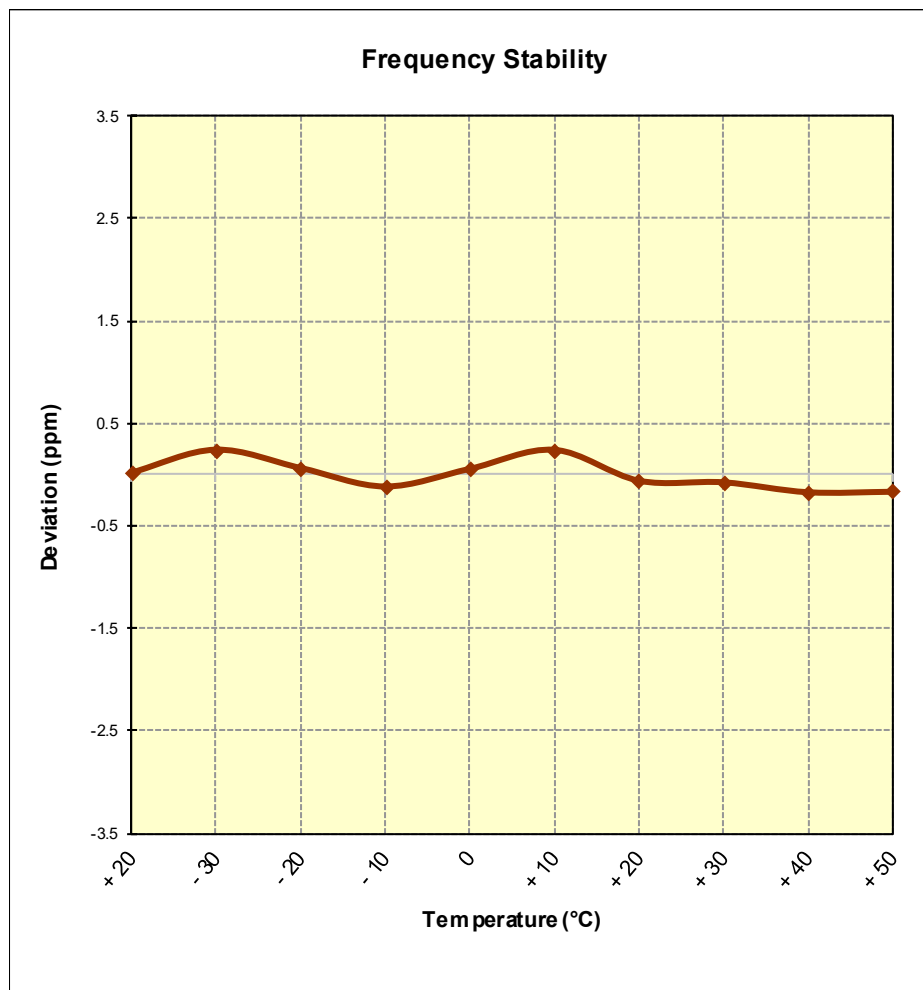


Figure 7-11. Frequency Stability Graph (Band 66/4)

FCC ID: A3LSMJ737T		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 162 of 167	

Band 2 Frequency Stability Measurements

OPERATING FREQUENCY: 1,880,000,000 Hz
CHANNEL: 18900
REFERENCE VOLTAGE: 3.85 VDC
DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,879,999,921	-79	-0.0000042
100 %		- 30	1,879,999,934	-66	-0.0000035
100 %		- 20	1,879,999,949	-51	-0.0000027
100 %		- 10	1,879,999,972	-28	-0.0000015
100 %		0	1,879,999,999	-1	-0.0000001
100 %		+ 10	1,879,999,752	-248	-0.0000132
100 %		+ 20	1,880,000,409	409	0.0000218
100 %		+ 30	1,880,000,019	19	0.0000010
100 %		+ 40	1,880,000,310	310	0.0000165
100 %		+ 50	1,879,999,969	-31	-0.0000016
BATT. ENDPOINT	3.45	+ 20	1,880,000,076	76	0.0000040

Table 7-31. Frequency Stability Data (Band 2)

FCC ID: A3LSMJ737T		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 163 of 167	

Band 2 Frequency Stability Measurements

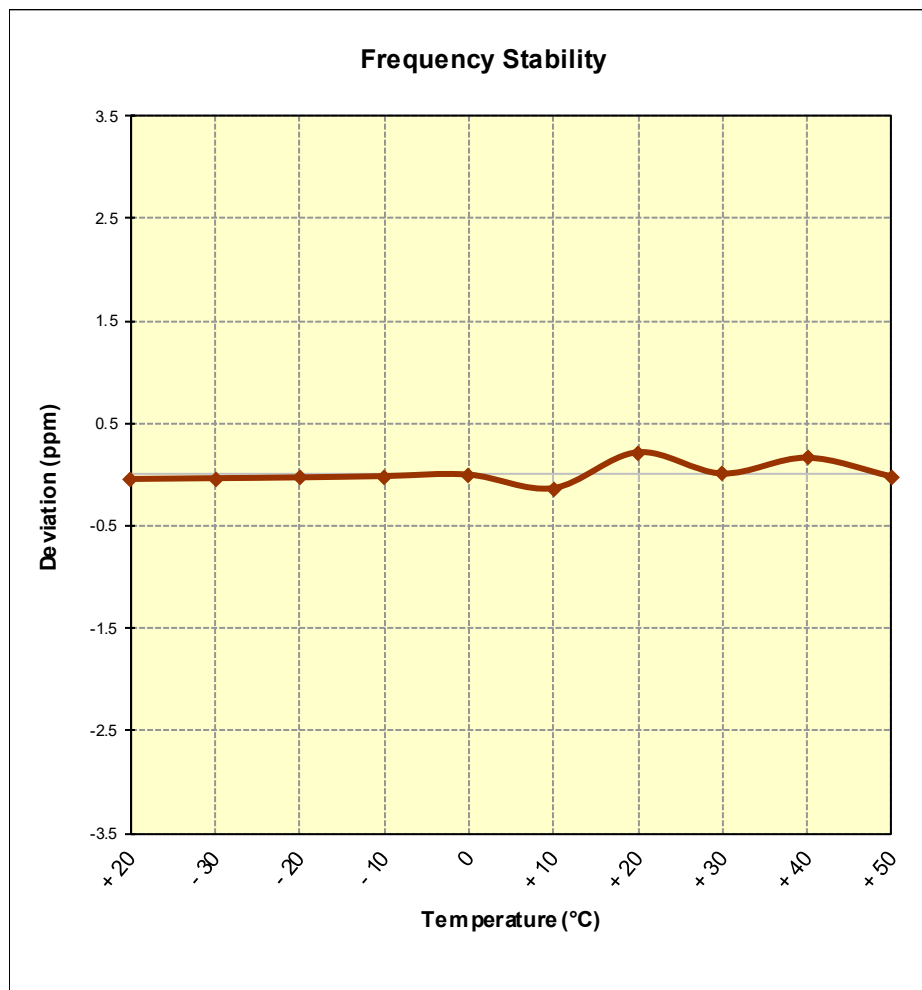


Figure 7-12. Frequency Stability Graph (Band 2)

FCC ID: A3LSMJ737T		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 164 of 167	

Band 7 Frequency Stability Measurements

OPERATING FREQUENCY: 2,535,000,000 Hz
 CHANNEL: 21100
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	2,535,000,059	59	0.0000023
100 %		- 30	2,534,999,895	-105	-0.0000041
100 %		- 20	2,534,999,975	-25	-0.0000010
100 %		- 10	2,535,000,069	69	0.0000027
100 %		0	2,534,999,812	-188	-0.0000074
100 %		+ 10	2,534,999,822	-178	-0.0000070
100 %		+ 20	2,534,999,624	-376	-0.0000148
100 %		+ 30	2,534,999,953	-47	-0.0000019
100 %		+ 40	2,534,999,900	-100	-0.0000039
100 %		+ 50	2,535,000,041	41	0.0000016
BATT. ENDPOINT	3.45	+ 20	2,535,000,049	49	0.0000019

Table 7-32. Frequency Stability Data (Band 7)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMJ737T		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 165 of 167	

Band 7 Frequency Stability Measurements

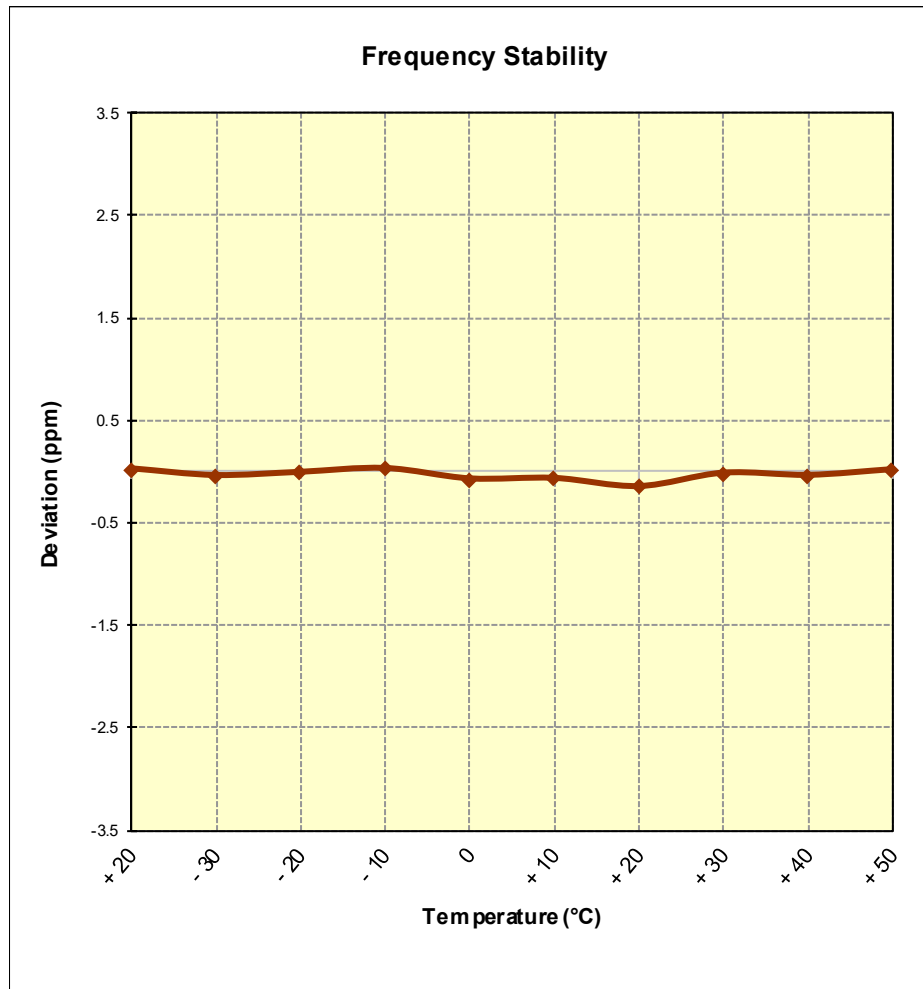


Figure 7-13. Frequency Stability Graph (Band 7)

FCC ID: A3LSMJ737T		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset	Page 166 of 167	

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMJ737T** complies with all the requirements of Part 22, 24, & 27 of the FCC Rules for LTE operation only.

FCC ID: A3LSMJ737T		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803150042-03-R1.A3L	Test Dates: 3/8 - 4/17/2018	EUT Type: Portable Handset		Page 167 of 167