



Channel 5 ANTENNA 1:

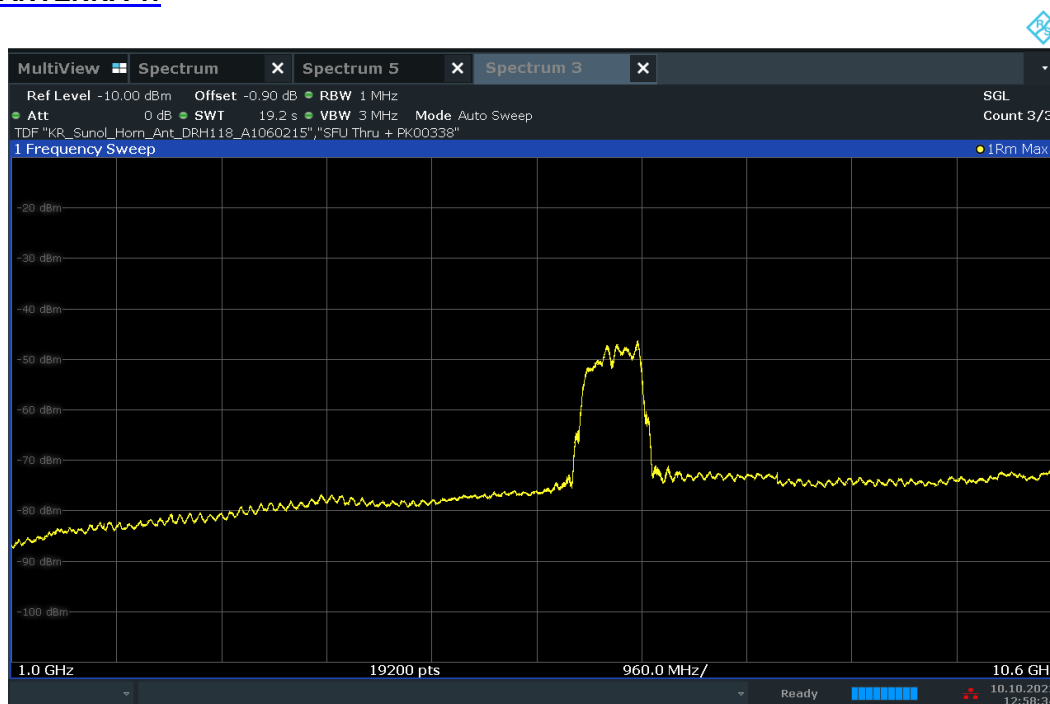


Plot 7-78. Radiated Spurious Pre-Scan 1000 - 10600 MHz - CH.5 - ANT 1

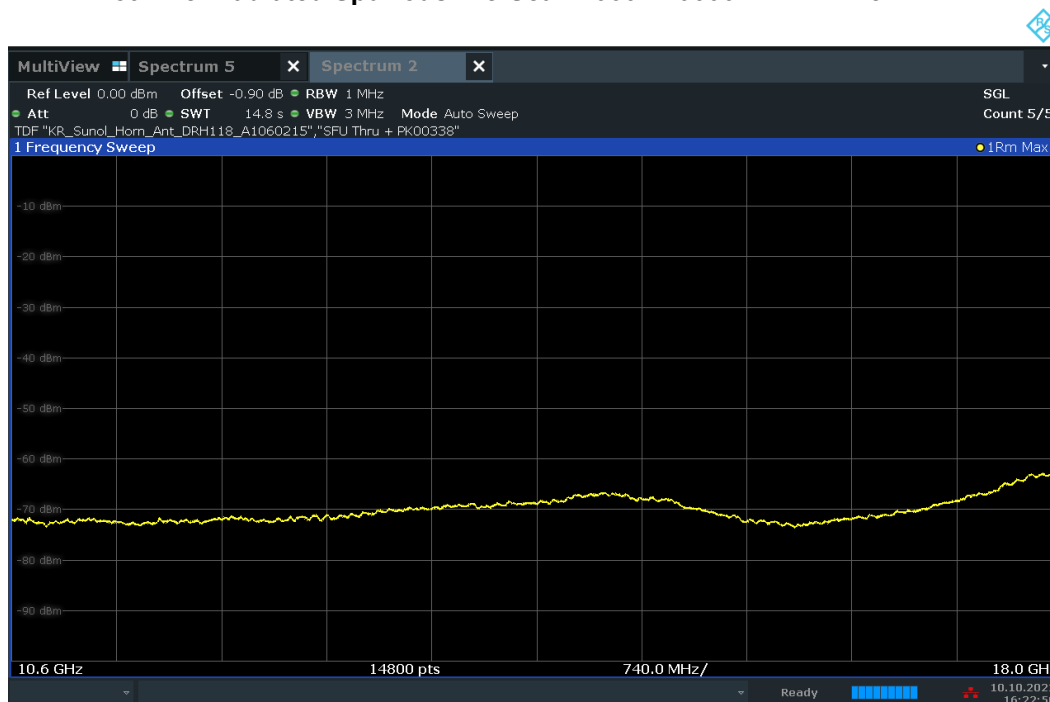


Plot 7-79. Radiated Spurious Pre-Scan 10600 - 18000 MHz - CH.5 - ANT 1

FCC ID: A3LSMS916U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010097-18.A3L	Test Dates: 10/4 – 10/24/2022	EUT Type: Portable Handset	Page 59 of 82

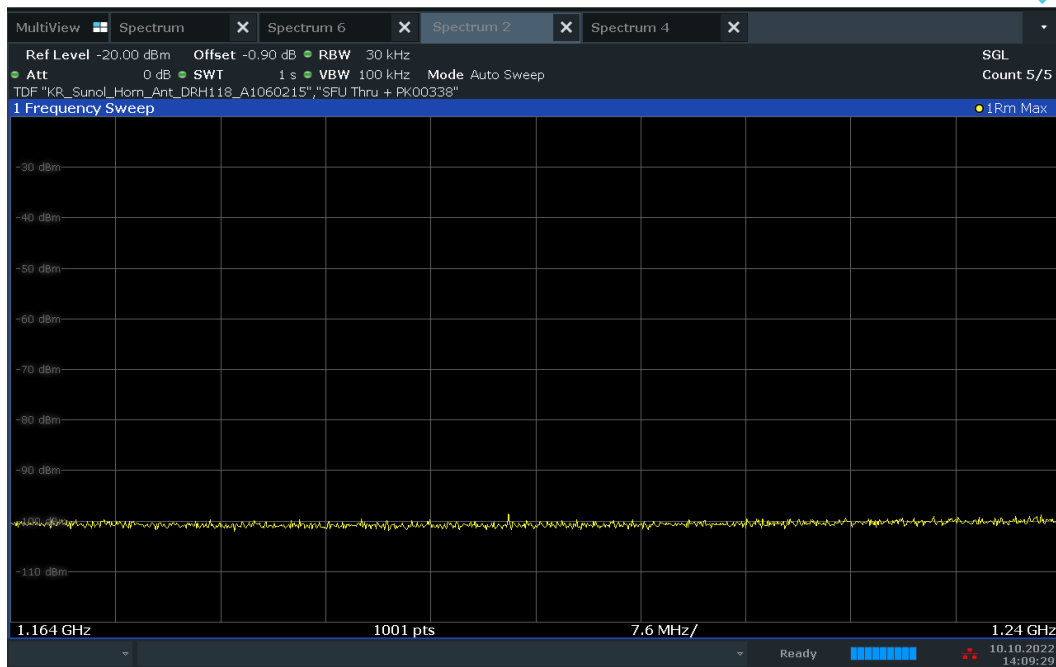


Plot 7-80. Radiated Spurious Pre-Scan 1164 - 1240 MHz - CH.5 - ANT 1 – GPS band

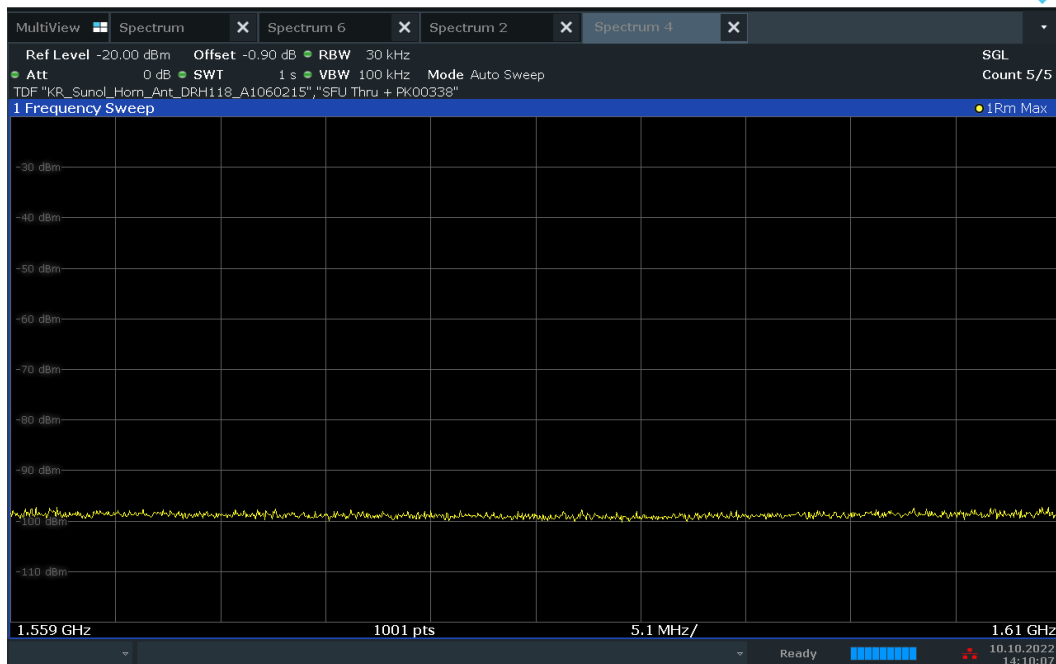

Plot 7-81. Radiated Spurious Pre-Scan 1559 - 1610 MHz - CH.5 - ANT 1 – GPS band

FCC ID: A3LSMS916U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010097-18.A3L	Test Dates: 10/4 – 10/24/2022	EUT Type: Portable Handset	Page 60 of 82

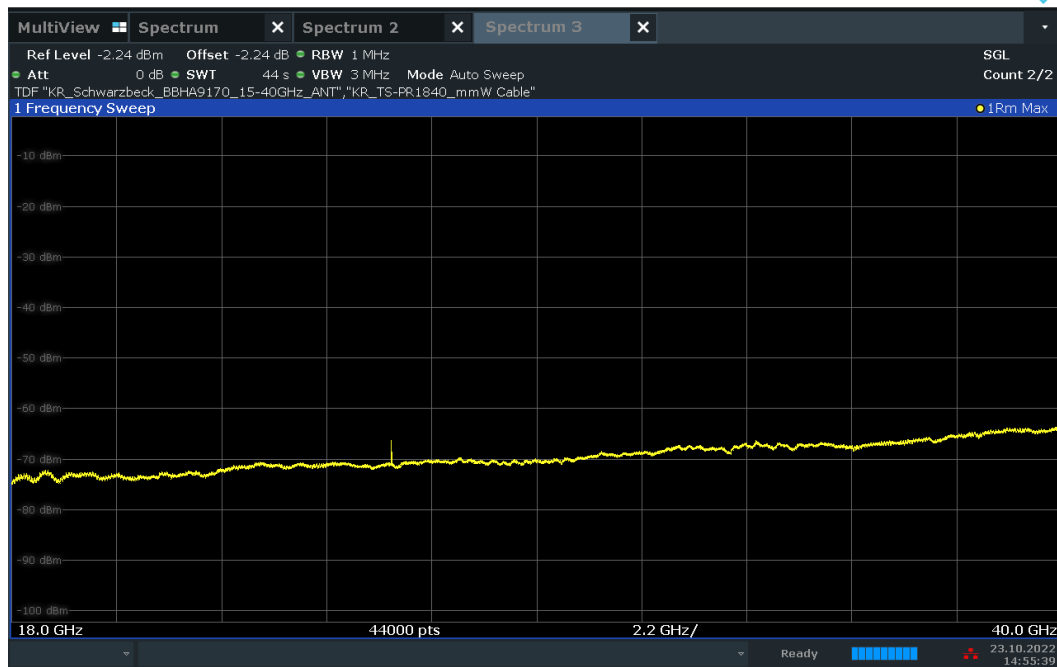

Plot 7-82. Radiated Spurious Pre-Scan 18 – 40 GHz - CH.5 - ANT 1

Channel:	5
Frequency (MHz):	6489.6
Preamble ID	12
Config	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Spurious Emission Level[dBm]	Limit [dBm]	Margin [dB]
1535	RMS	V	-	-	-83.35	-75.30	-8.05
1807	RMS	V	-	-	-82.19	-63.30	-18.89
3097	RMS	V	-	-	-79.21	-61.30	-17.91
10517	RMS	V	-	-	-71.42	-41.30	-30.12
12979	RMS	V	-	-	-71.09	-61.30	-9.79
25958	RMS	H	150	347	-66.10	-61.30	-4.80

Table 7-11. Radiated Spurious Emissions CH. 5 – ANT1


Channel:	5
Frequency (MHz):	6489.6
Preamble ID	12
Config	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Spurious Emission Level[dBm]	Limit [dBm]	Margin [dB]
1200	RMS	V	150	339	-98.62	-85.30	-13.32
1230	RMS	V	150	339	-99.06	-85.30	-13.76
1239	RMS	V	150	339	-98.72	-85.30	-13.42
1560	RMS	V	-	-	-97.53	-85.30	-12.23
1572	RMS	V	-	-	-97.58	-85.30	-12.28
1609	RMS	V	-	-	-97.30	-85.30	-12.00


Table 7-12. Radiated Spurious Emissions CH. 5 – ANT1 – GPS BANDS

FCC ID: A3LSMS916U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010097-18.A3L	Test Dates: 10/4 – 10/24/2022	EUT Type: Portable Handset	Page 61 of 82

Channel 5 ANTENNA 2:

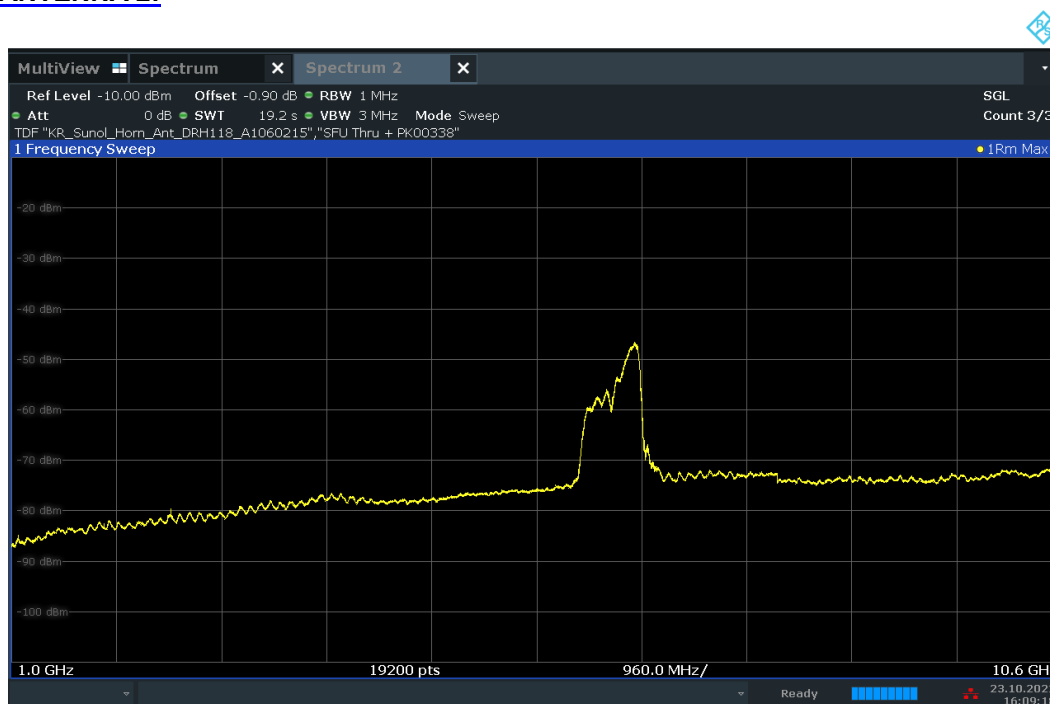


Plot 7-83. Radiated Spurious Pre-Scan 1000 - 10600 MHz - CH.5 - ANT 2

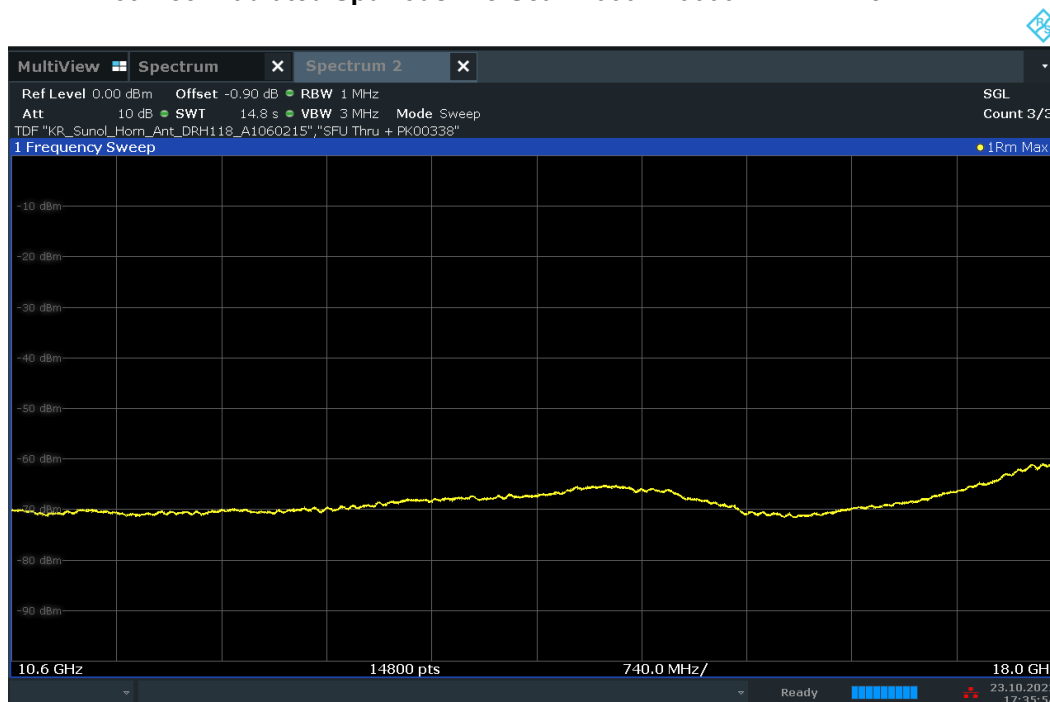


Plot 7-84. Radiated Spurious Pre-Scan 10600 - 18000 MHz - CH.5 - ANT 2

FCC ID: A3LSMS916U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010097-18.A3L	Test Dates: 10/4 – 10/24/2022	EUT Type: Portable Handset	Page 62 of 82

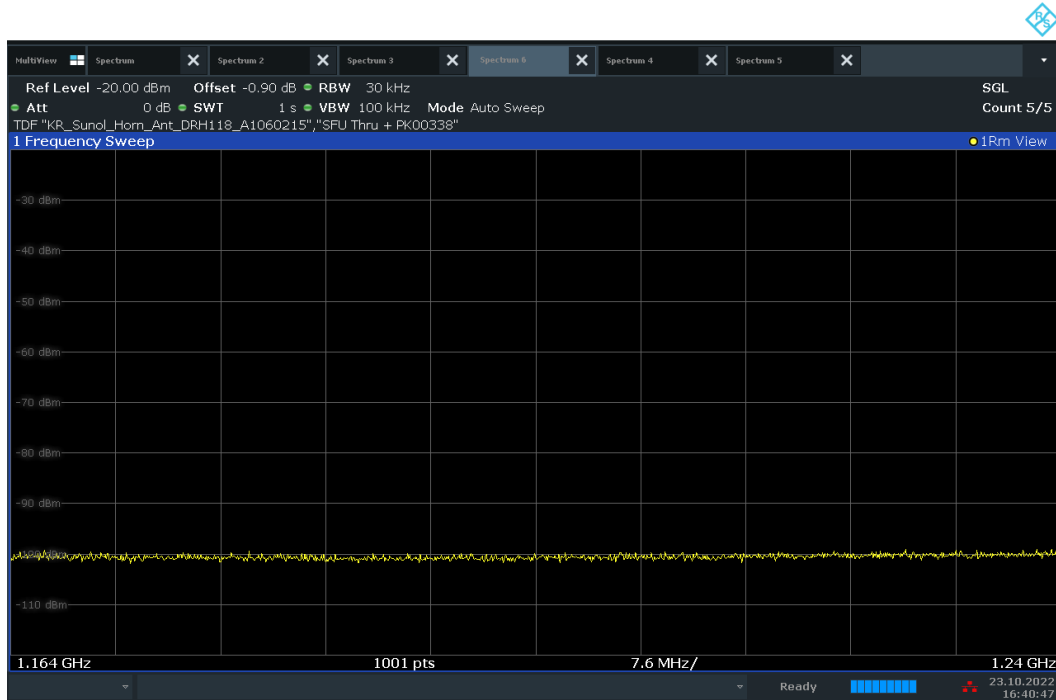


Plot 7-85. Radiated Spurious Pre-Scan 1164 - 1240 MHz - CH.5 - ANT 2 – GPS band

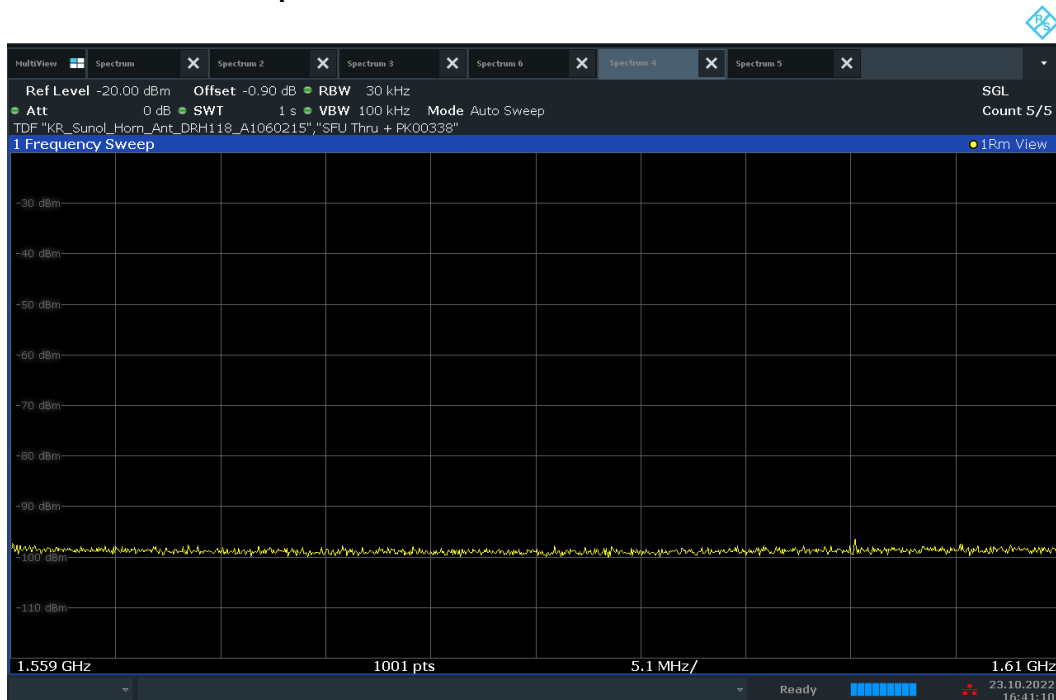

Plot 7-86. Radiated Spurious Pre-Scan 1559 - 1610 MHz - CH.5 - ANT 2 – GPS band

FCC ID: A3LSMS916U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010097-18.A3L	Test Dates: 10/4 – 10/24/2022	EUT Type: Portable Handset	Page 63 of 82

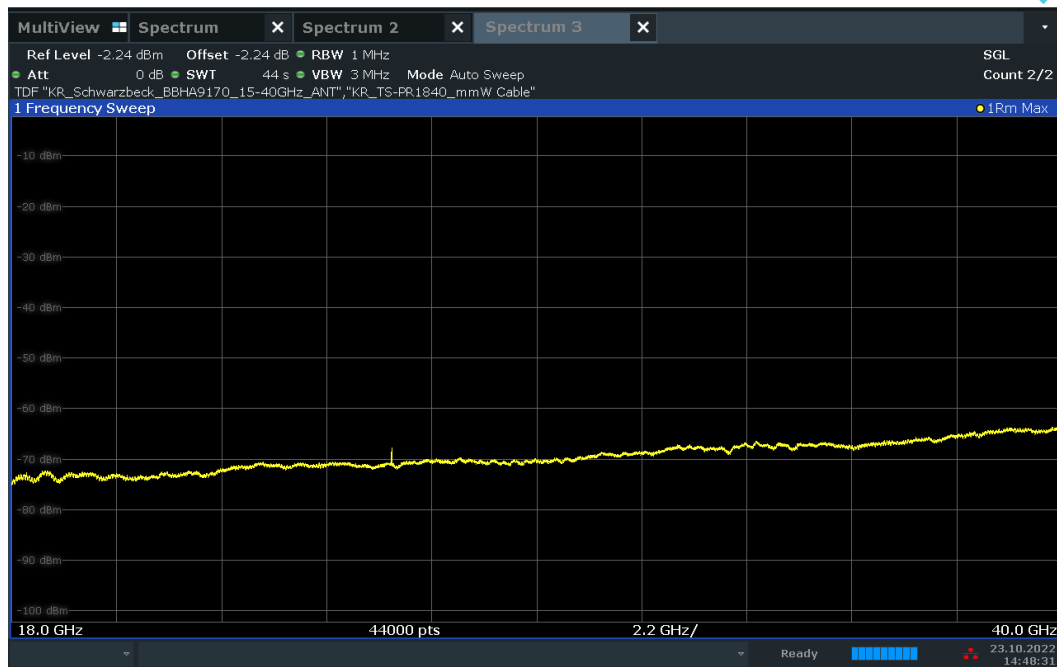

Plot 7-87. Radiated Spurious Pre-Scan 18 – 40 GHz - CH.5 - ANT 2

Channel:	5
Frequency (MHz):	6489.6
Preamble ID	12
Config	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Spurious Emission Level[dBm]	Limit [dBm]	Margin [dB]
1423	RMS	H	-	-	-83.37	-75.30	-8.07
1891	RMS	H	-	-	-81.91	-63.30	-18.61
3089	RMS	H	-	-	-79.20	-61.30	-17.90
10598	RMS	H	-	-	-71.71	-41.30	-30.41
12979	RMS	H	-	-	-70.98	-61.30	-9.68
25958	RMS	H	150	63	-66.80	-61.30	-5.50

Table 7-13. Radiated Spurious Emissions CH. 5 – ANT2


Channel:	5
Frequency (MHz):	6489.6
Preamble ID	12
Config	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Spurious Emission Level[dBm]	Limit [dBm]	Margin [dB]
1166	RMS	H	-	-	-99.23	-85.30	-13.93
1226	RMS	H	-	-	-99.27	-85.30	-13.97
1239	RMS	H	-	-	-99.04	-85.30	-13.74
1559	RMS	H	150	262	-97.55	-85.30	-12.25
1600	RMS	H	150	262	-96.41	-85.30	-11.11
1609	RMS	H	150	262	-97.58	-85.30	-12.28


Table 7-14. Radiated Spurious Emissions CH. 5 – ANT2 – GPS BANDs

FCC ID: A3LSMS916U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010097-18.A3L	Test Dates: 10/4 – 10/24/2022	EUT Type: Portable Handset	Page 64 of 82

Channel 9 ANTENNA 1:

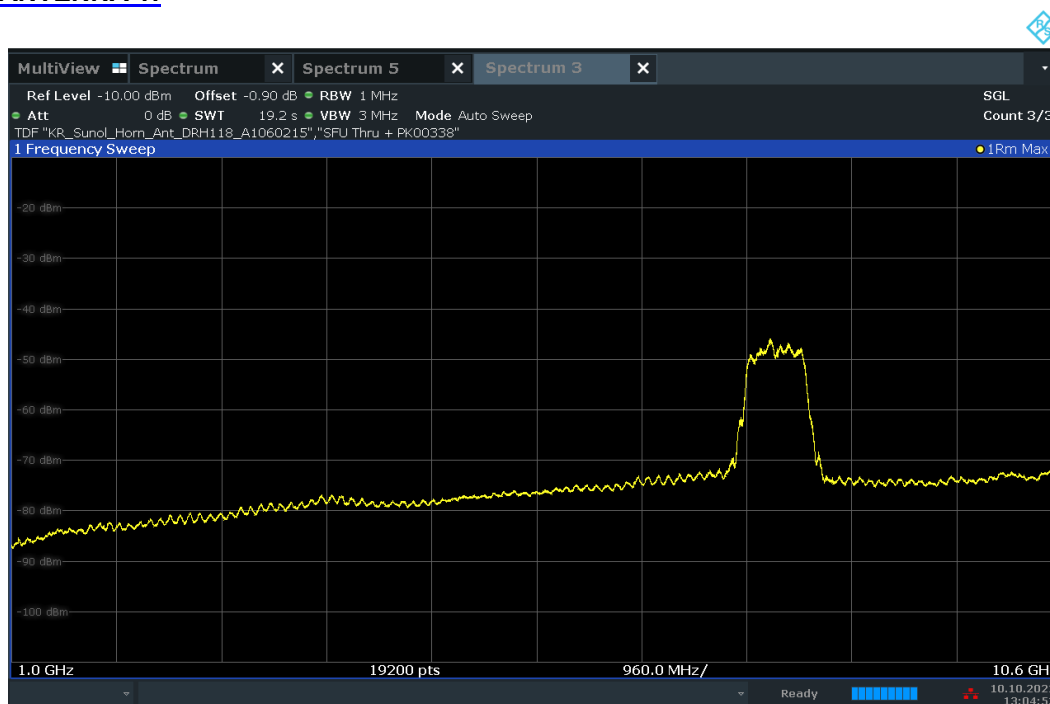


Plot 7-88. Radiated Spurious Pre-Scan 1000 - 10600 MHz - CH.9 - ANT 1

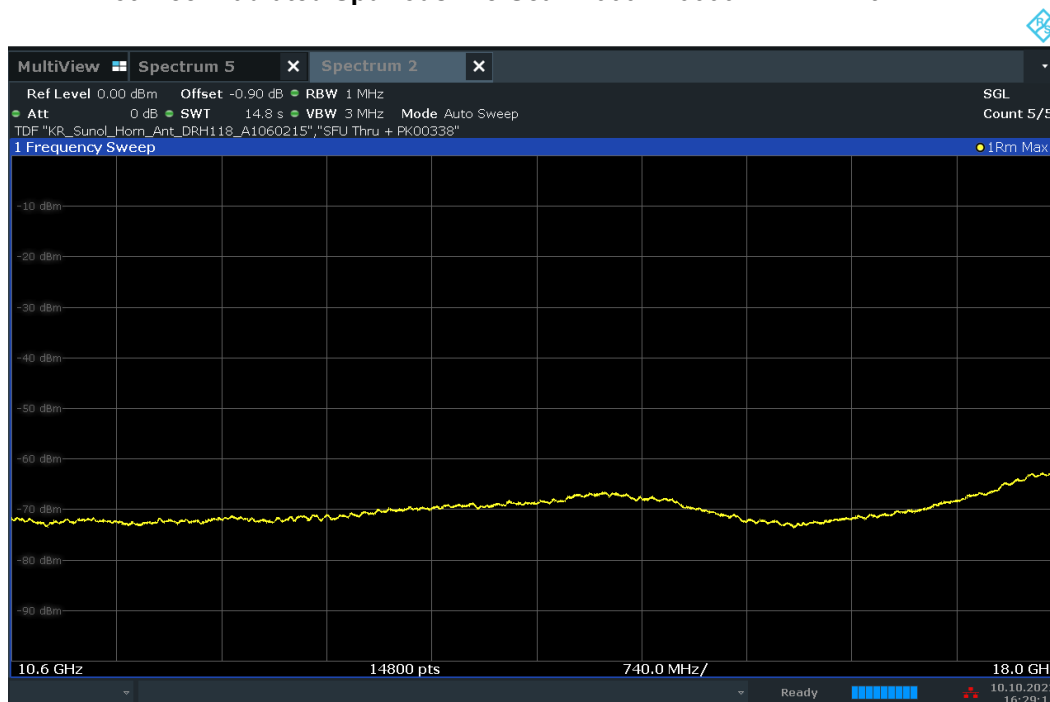


Plot 7-89. Radiated Spurious Pre-Scan 10600 - 18000 MHz - CH.9 - ANT 1

FCC ID: A3LSMS916U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010097-18.A3L	Test Dates: 10/4 – 10/24/2022	EUT Type: Portable Handset	Page 65 of 82

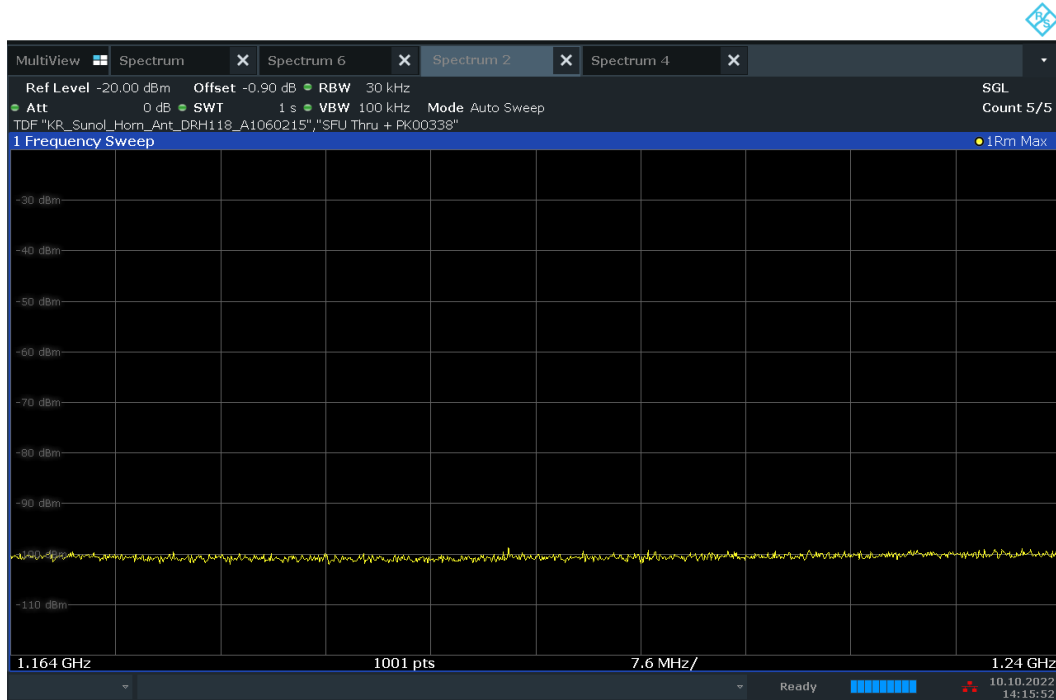


Plot 7-90. Radiated Spurious Pre-Scan 1164 - 1240 MHz - CH.9 - ANT 1 – GPS band

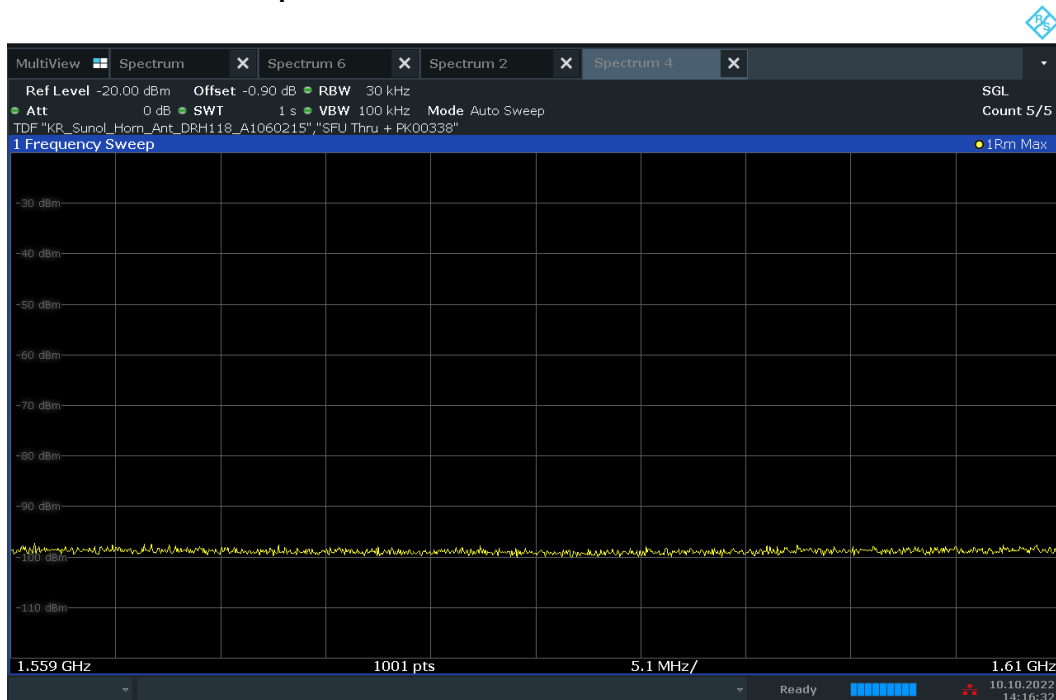

Plot 7-91. Radiated Spurious Pre-Scan 1559 - 1610 MHz - CH.9 - ANT 1 – GPS band

FCC ID: A3LSMS916U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010097-18.A3L	Test Dates: 10/4 – 10/24/2022	EUT Type: Portable Handset	Page 66 of 82

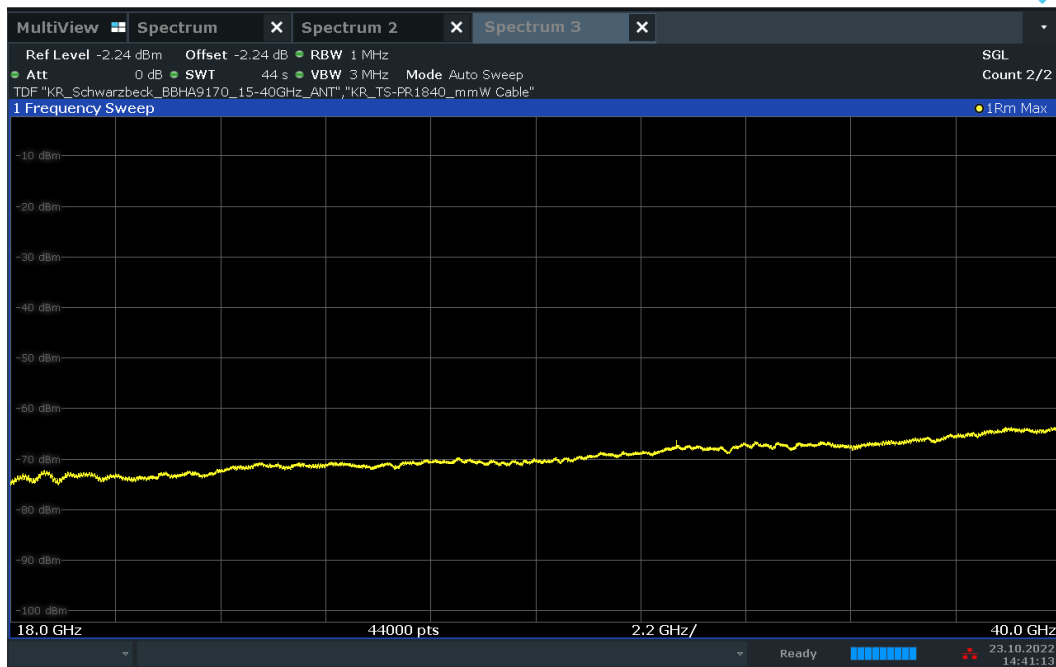

Plot 7-92. Radiated Spurious Pre-Scan 18 – 40 GHz - CH.9 - ANT 1

Channel:	9
Frequency (MHz):	7987.2
Preamble ID	9
Config	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Spurious Emission Level[dBm]	Limit [dBm]	Margin [dB]
1531	RMS	V	-	-	-83.36	-75.30	-8.06
1897	RMS	V	-	-	-82.31	-63.30	-19.01
3097	RMS	V	-	-	-79.29	-61.30	-17.99
10597	RMS	V	-	-	-72.25	-41.30	-30.95
15974	RMS	V	-	-	-72.09	-61.30	-10.79
31949	RMS	V	150	337	-66.73	-61.30	-5.43

Table 7-15. Radiated Spurious Emissions CH. 9 – ANT1


Channel:	9
Frequency (MHz):	7987.2
Preamble ID	9
Config	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Spurious Emission Level[dBm]	Limit [dBm]	Margin [dB]
1200	RMS	V	150	54	-98.76	-85.30	-13.46
1234	RMS	V	150	54	-99.10	-85.30	-13.80
1239	RMS	V	150	54	-99.08	-85.30	-13.78
1560	RMS	V	-	-	-97.34	-85.30	-12.04
1572	RMS	V	-	-	-97.56	-85.30	-12.26
1609	RMS	V	-	-	-97.59	-85.30	-12.29


Table 7-16. Radiated Spurious Emissions CH. 9 – ANT1 – GPS BANDs

FCC ID: A3LSMS916U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010097-18.A3L	Test Dates: 10/4 – 10/24/2022	EUT Type: Portable Handset	Page 67 of 82

Channel 9 ANTENNA 2:

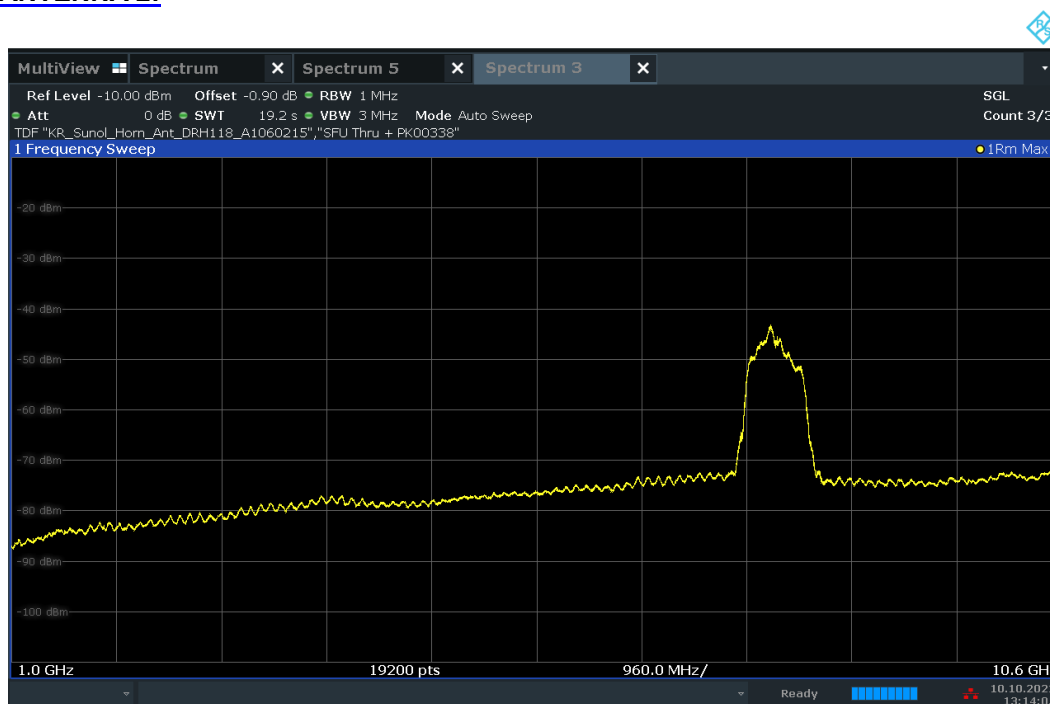


Plot 7-93. Radiated Spurious Pre-Scan 1000 - 10600 MHz - CH.9 - ANT 2

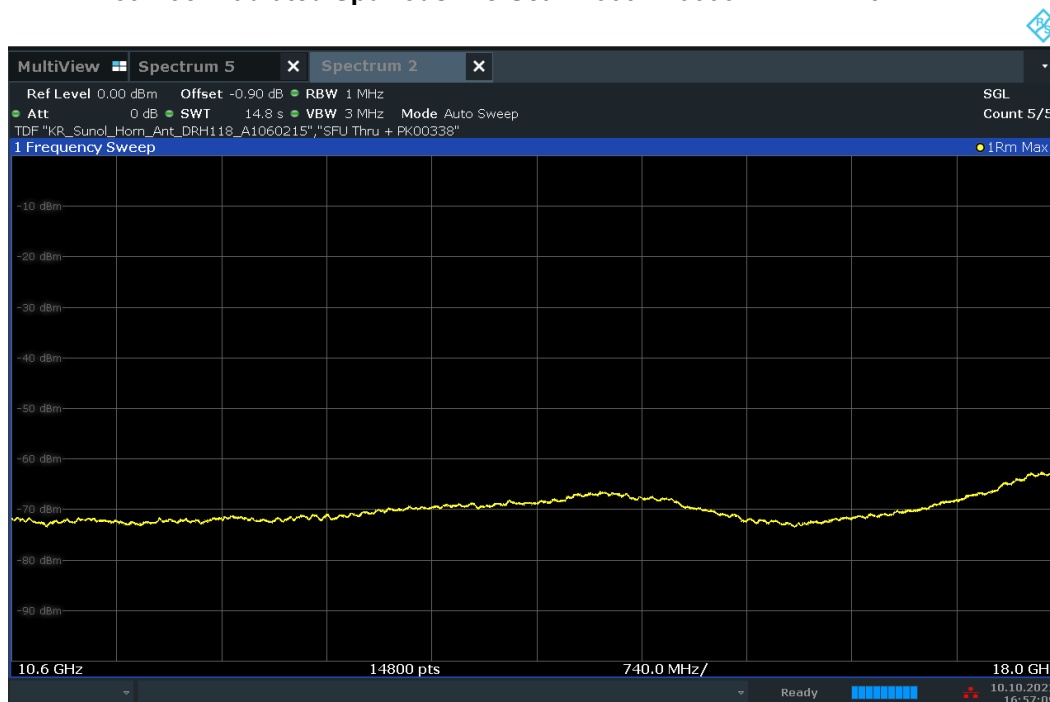


Plot 7-94. Radiated Spurious Pre-Scan 10600 - 18000 MHz - CH.9 - ANT 2

FCC ID: A3LSMS916U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010097-18.A3L	Test Dates: 10/4 – 10/24/2022	EUT Type: Portable Handset	Page 68 of 82

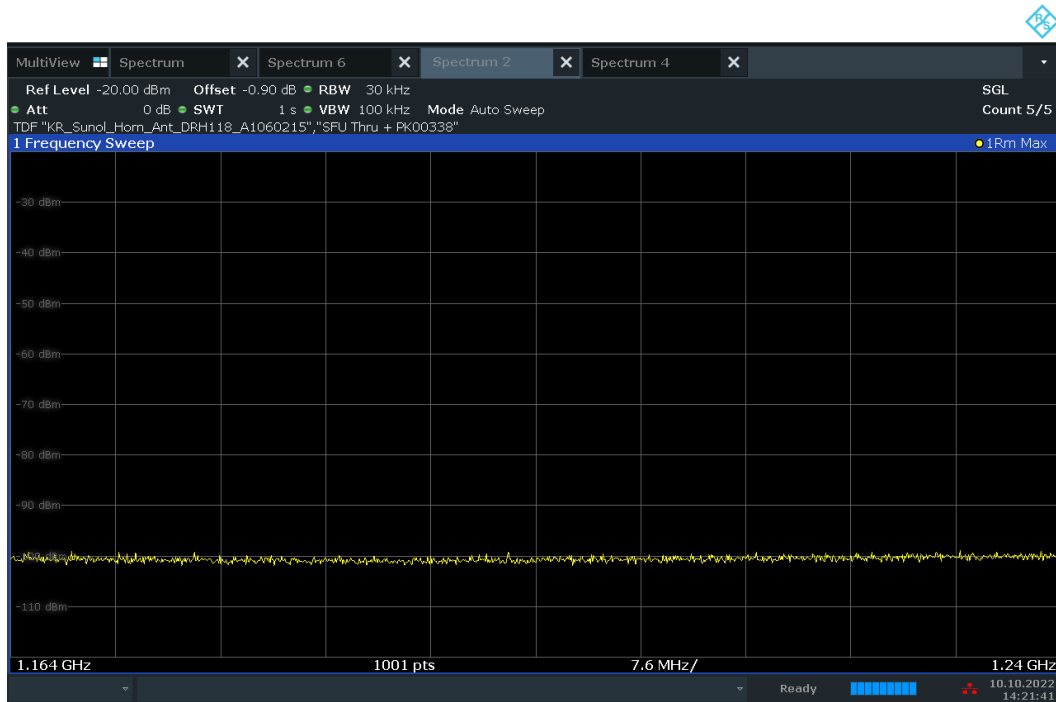


Plot 7-95. Radiated Spurious Pre-Scan 1164 - 1240 MHz - CH.9 - ANT 2 – GPS band

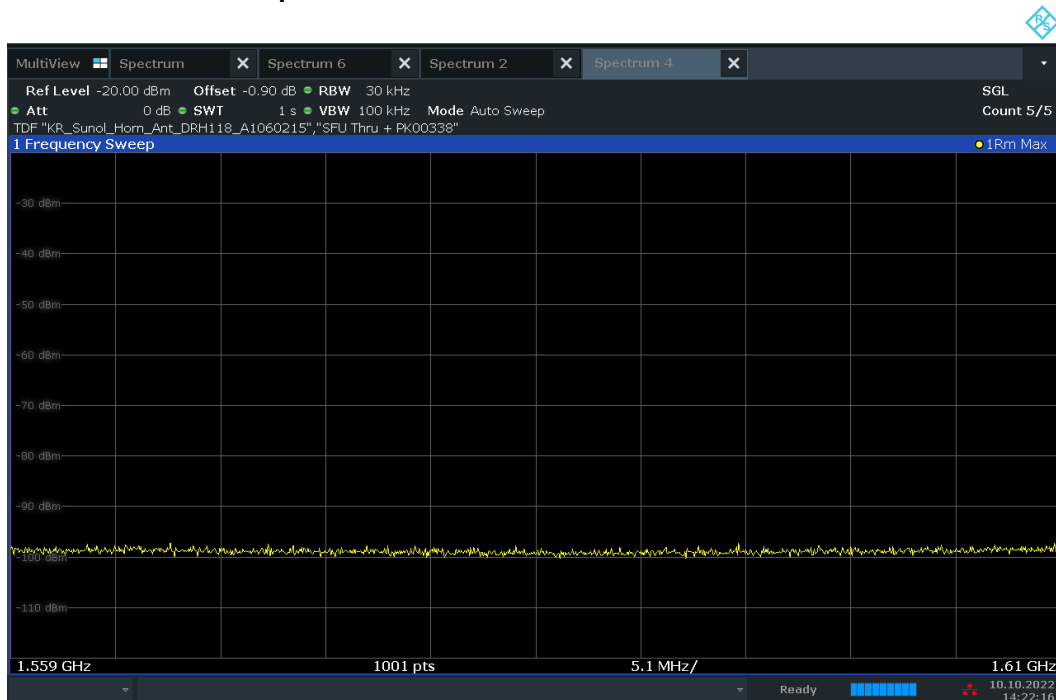

Plot 7-96. Radiated Spurious Pre-Scan 1559 - 1610 MHz – CH 9 - ANT 2 – GPS band

FCC ID: A3LSMS916U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010097-18.A3L	Test Dates: 10/4 – 10/24/2022	EUT Type: Portable Handset	Page 69 of 82

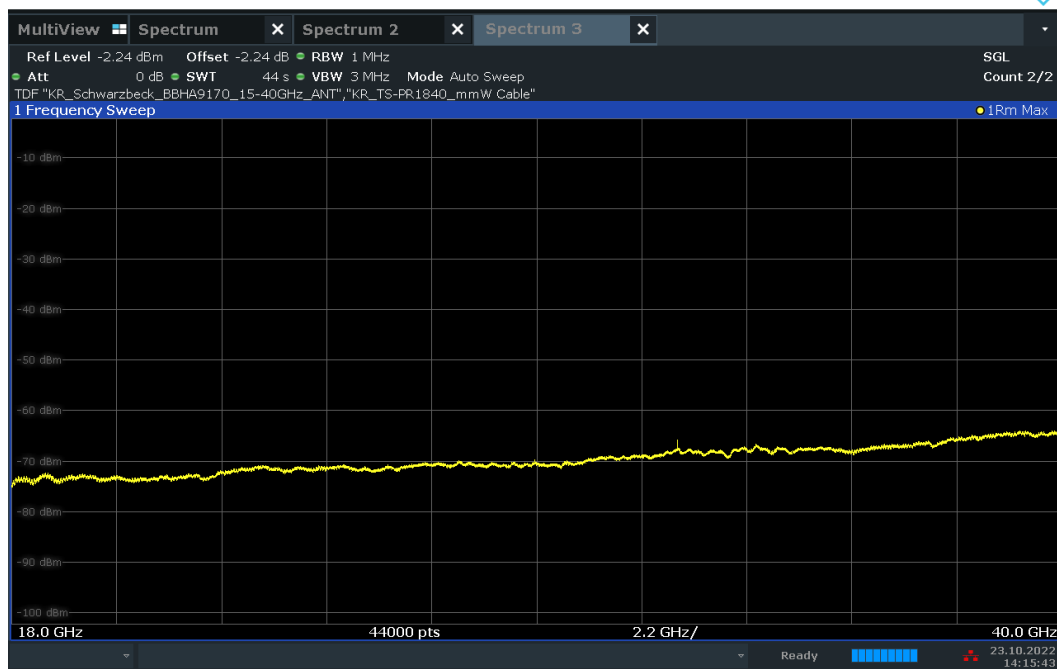

Plot 7-97. Radiated Spurious Pre-Scan 18 – 40 GHz - CH.9 - ANT 2

Channel:	9
Frequency (MHz):	7987.2
Preamble ID	12
Config	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Spurious Emission Level[dBm]	Limit [dBm]	Margin [dB]
1528	RMS	V	-	-	-83.41	-75.30	-8.11
1901	RMS	V	-	-	-82.32	-63.30	-19.02
3097	RMS	V	-	-	-79.36	-61.30	-18.06
10527	RMS	V	-	-	-71.67	-41.30	-30.37
15974	RMS	V	-	-	-72.27	-61.30	-10.97
31949	RMS	V	150	327	-65.16	-61.30	-3.86

Table 7-17. Radiated Spurious Emissions CH. 9 – ANT2

Channel:	9
Frequency (MHz):	7987.2
Preamble ID	12
Config	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Spurious Emission Level[dBm]	Limit [dBm]	Margin [dB]
1165	RMS	V	150	230	-99.28	-85.30	-13.98
1177	RMS	V	150	230	-99.20	-85.30	-13.90
1233	RMS	V	150	230	-98.92	-85.30	-13.62
1563	RMS	V	-	-	-97.41	-85.30	-12.11
1594	RMS	V	-	-	-97.23	-85.30	-11.93
1609	RMS	V	-	-	-97.34	-85.30	-12.04

Table 7-18. Radiated Spurious Emissions CH. 9 – ANT2 – GPS BANDs

FCC ID: A3LSMS916U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010097-18.A3L	Test Dates: 10/4 – 10/24/2022	EUT Type: Portable Handset	Page 70 of 82

7.6 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209(a), §15.519(c); RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-19 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-19. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMS916U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010097-18.A3L	Test Dates: 10/4 – 10/24/2022	EUT Type: Portable Handset	Page 71 of 82

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

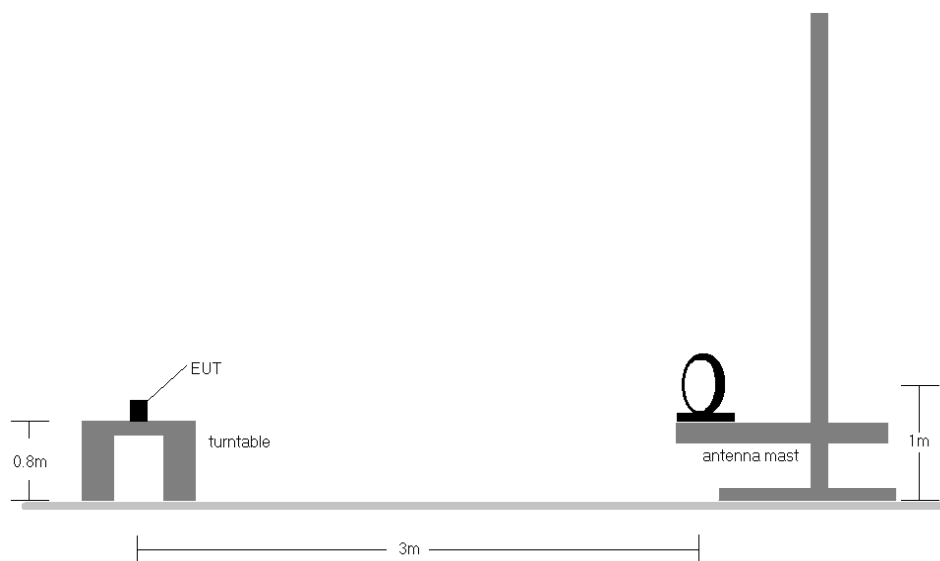


Figure 7-4. Radiated Test Setup < 30Mhz

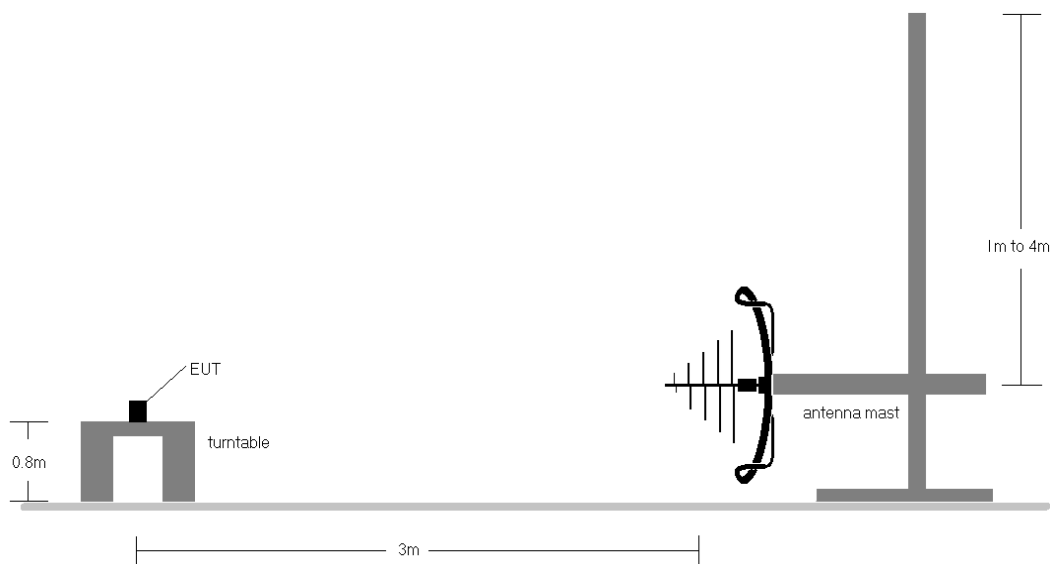



Figure 7-5. Radiated Test Setup < 1GHz

FCC ID: A3LSMS916U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010097-18.A3L	Test Dates: 10/4 – 10/24/2022	EUT Type: Portable Handset	Page 72 of 82

Test Notes

1. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
2. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
3. Emissions were measured at a 3 meter test distance.
4. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
5. No spurious emissions were detected within 20dB of the limit below 30MHz.
6. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.


FCC ID: A3LSMS916U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010097-18.A3L	Test Dates: 10/4 – 10/24/2022	EUT Type: Portable Handset	Page 73 of 82

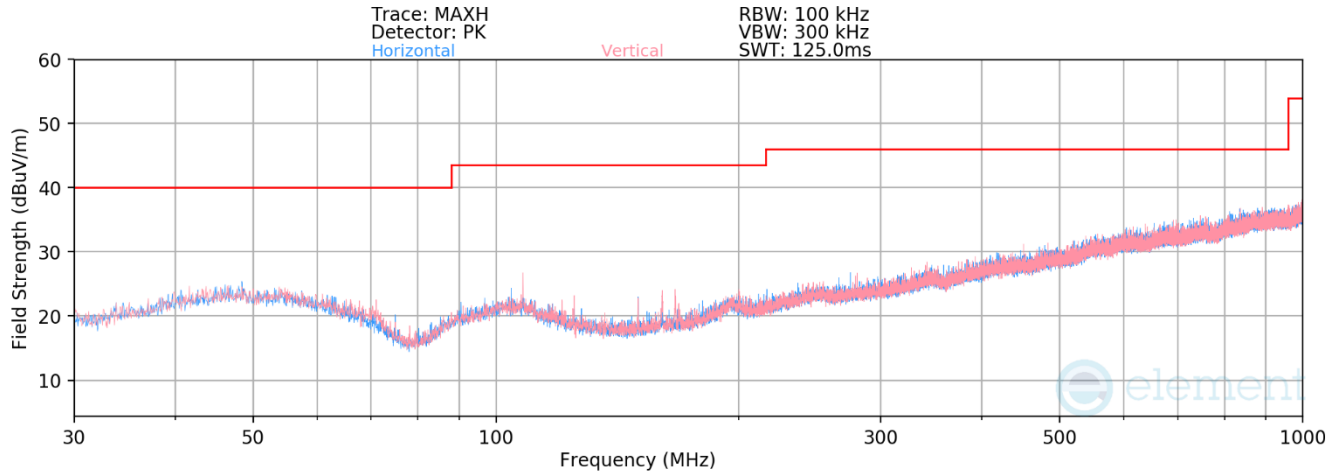

Plot 7-98. 30MHz - 1 GHz Pre-Scan Plots ANT1 – CH 5

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
108.00	Quasi-Peak	V	103	269	-95.78	12.65	23.87	43.52	-19.66
124.99	Quasi-Peak	V	103	246	-96.77	9.91	20.14	43.52	-23.38
167.00	Quasi-Peak	V	132	274	-96.37	9.86	20.49	43.52	-23.03

Table 7-20. Radiated Spurious Emissions Below 1GHz ANT1 – CH5

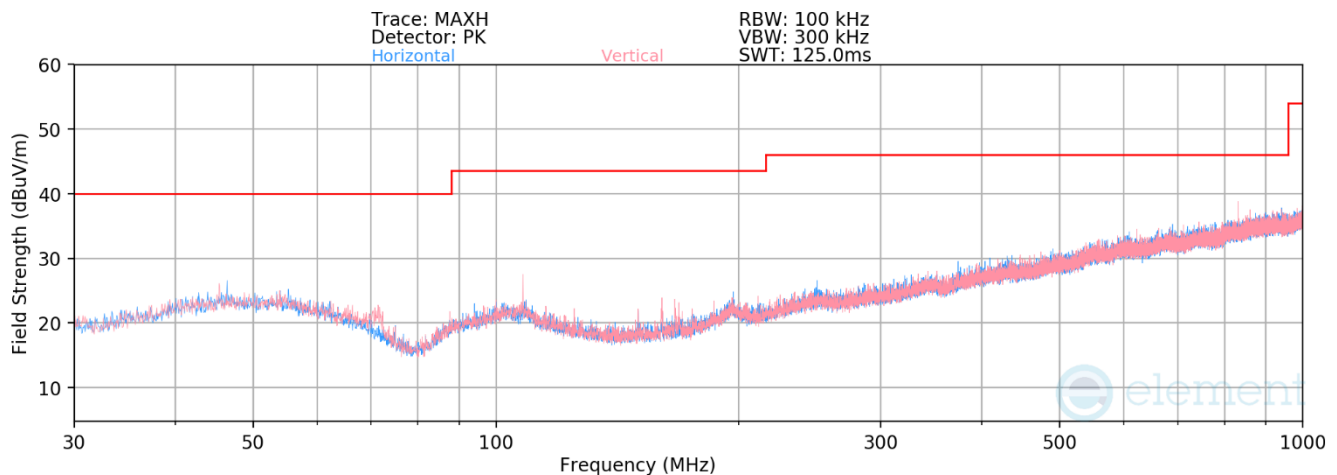


Plot 7-99. 30MHz - 1 GHz Pre-Scan Plots ANT1 – CH 9

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
125.00	Quasi-Peak	V	110	188	-96.34	9.91	20.57	43.52	-22.95
166.88	Quasi-Peak	V	128	159	-94.70	9.85	22.15	43.52	-21.37
832.50	Quasi-Peak	V	-	-	-97.89	24.13	33.24	46.02	-12.78

Table 7-21. Radiated Spurious Emissions Below 1GHz ANT1 – CH9


FCC ID: A3LSMS916U	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1M2209010097-18.A3L	Test Dates: 10/4 – 10/24/2022	EUT Type: Portable Handset		Page 74 of 82

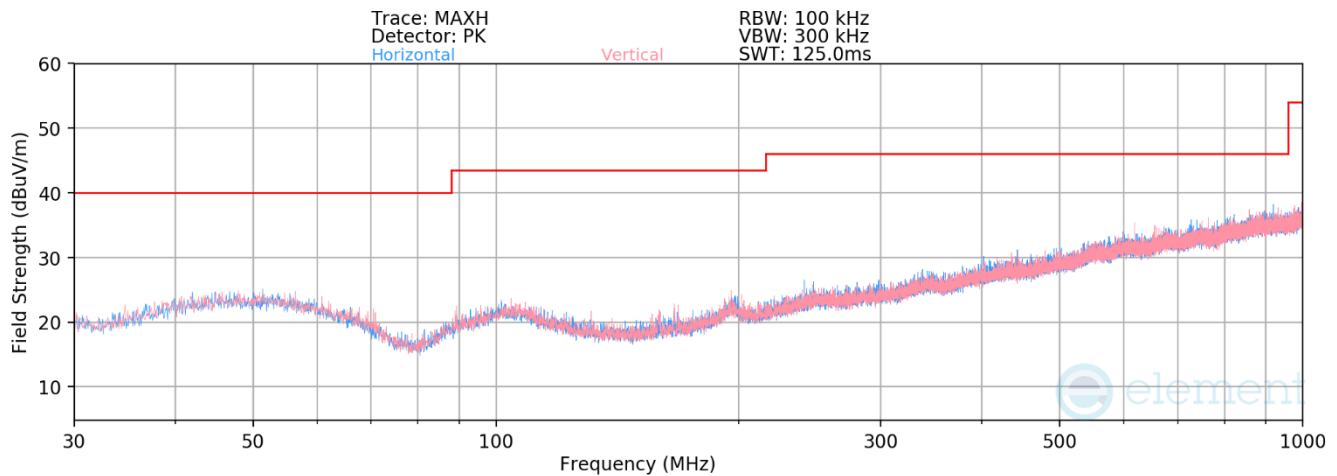

Plot 7-100. 30MHz - 1 GHz Pre-Scan Plots ANT2 – CH 5

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
51.95	Quasi-Peak	V	-	-	-99.68	14.60	21.92	40.00	-18.08
159.63	Quasi-Peak	V	180	22	-94.12	9.60	22.48	43.52	-21.04
898.11	Quasi-Peak	V	-	-	-93.62	25.02	38.40	46.02	-7.62

Table 7-22. Radiated Spurious Emissions Below 1GHz ANT2 – CH5

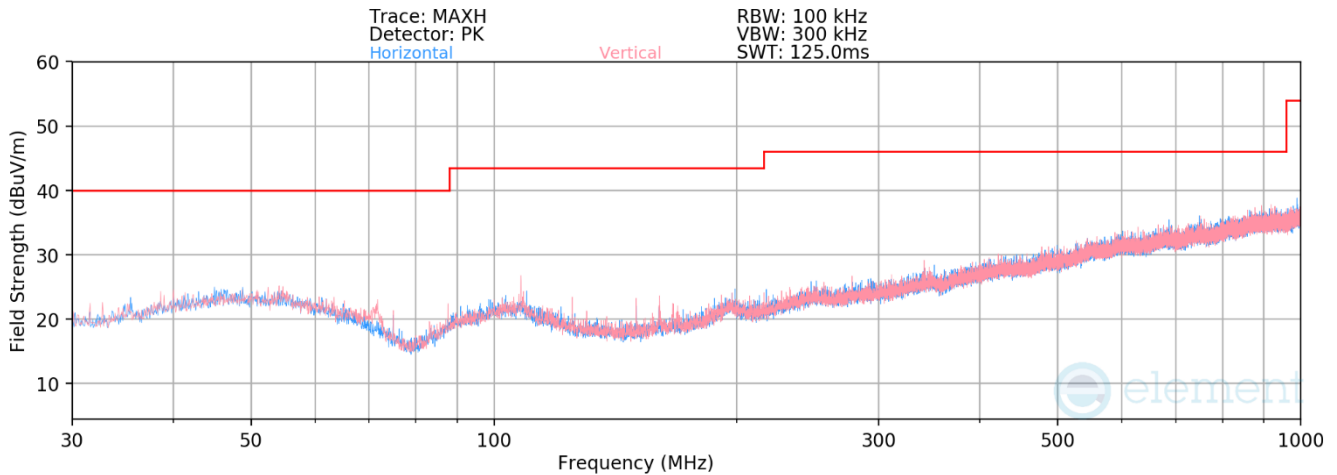

Plot 7-101. 30MHz - 1 GHz Pre-Scan Plots ANT2 – CH 9

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
124.98	Quasi-Peak	V	115	190	-95.51	9.92	21.41	43.52	-22.12
149.98	Quasi-Peak	V	108	172	-94.92	9.09	21.17	43.52	-22.35
160.81	Quasi-Peak	V	125	158	-94.24	9.64	22.40	43.52	-21.12

Table 7-23. Radiated Spurious Emissions Below 1GHz ANT2 – CH9

FCC ID: A3LSMS916U	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1M2209010097-18.A3L	Test Dates: 10/4 – 10/24/2022	EUT Type: Portable Handset		Page 75 of 82

7.7 Line Conducted Measurement Data

§15.207

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All emissions must not exceed the limits shown in Table 7-24 per FCC 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-24. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.4-2014

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMS916U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010097-18.A3L	Test Dates: 10/4 – 10/24/2022	EUT Type: Portable Handset	Page 76 of 82

Test Setup

The EUT and measurement equipment were set up as shown in the test setup photos provided.


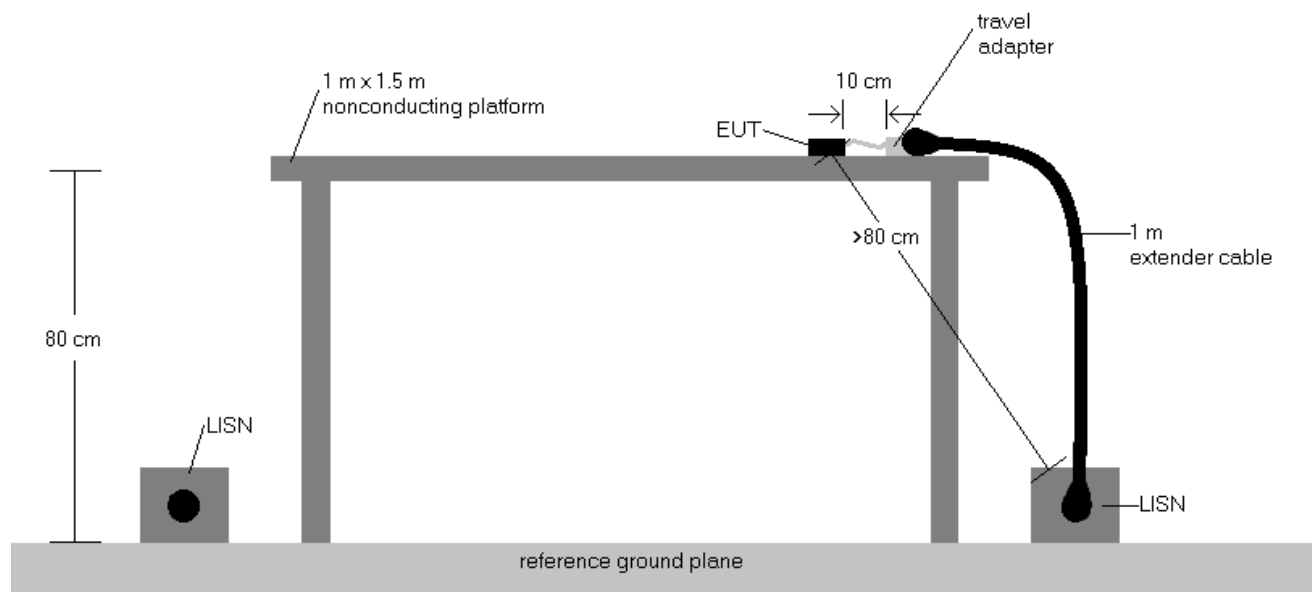


Figure 7-6. Test Instrument & Measurement Setup

Test Notes

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 and RSS-Gen.
3. L1 = Phase; N = Neutral
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Reading (dB}\mu\text{V)} + \text{Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: A3LSMS916U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010097-18.A3L	Test Dates: 10/4 – 10/24/2022	EUT Type: Portable Handset	Page 77 of 82

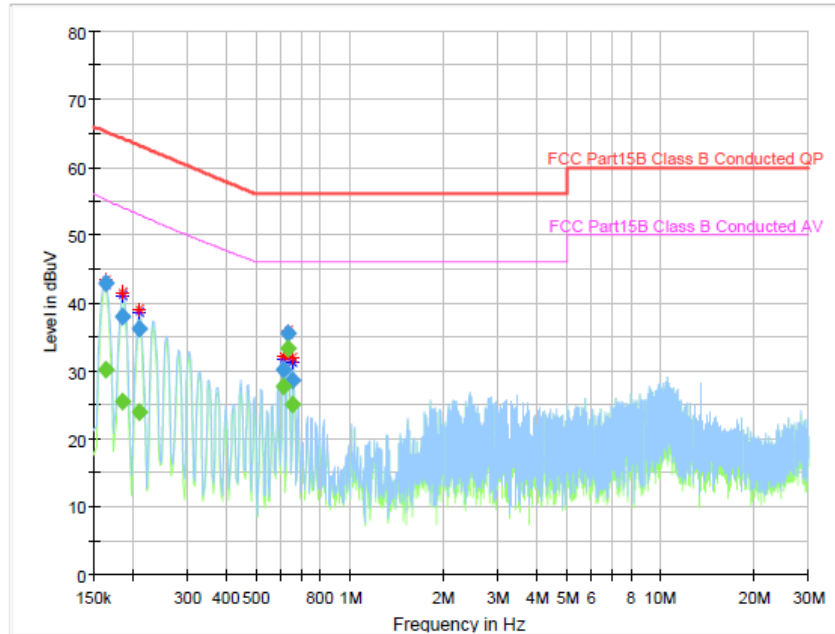


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.164925	---	30.10	55.14	25.04	1000.0	9.000	L1	9.9
0.164925	42.82	---	65.21	22.40	1000.0	9.000	L1	9.9
0.185820	---	25.45	54.08	28.62	1000.0	9.000	L1	9.9
0.185820	37.91	---	64.22	26.31	1000.0	9.000	L1	9.9
0.209700	---	23.83	53.02	29.19	1000.0	9.000	L1	9.8
0.209700	36.27	---	63.22	26.94	1000.0	9.000	L1	9.8
0.612675	---	27.68	46.00	18.32	1000.0	9.000	L1	9.9
0.612675	30.17	---	56.00	25.83	1000.0	9.000	L1	9.9
0.636555	---	33.32	46.00	12.68	1000.0	9.000	L1	9.9
0.636555	35.47	---	56.00	20.53	1000.0	9.000	L1	9.9
0.657450	---	25.07	46.00	20.93	1000.0	9.000	L1	9.9
0.657450	28.55	---	56.00	27.45	1000.0	9.000	L1	9.9

Plot 7-102. Line Conducted Plot (L1) ANT 1 – CH 9

FCC ID: A3LSMS916U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010097-18.A3L	Test Dates: 10/4 – 10/24/2022	EUT Type: Portable Handset	Page 78 of 82

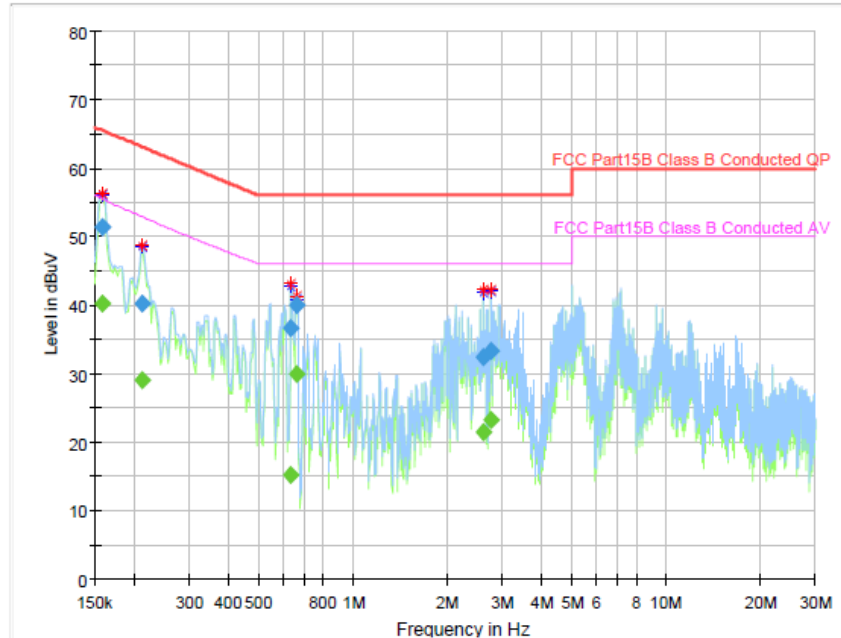


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.158955	---	40.19	55.47	15.28	1000.0	9.000	N	9.9
0.158955	51.30	---	65.52	14.22	1000.0	9.000	N	9.9
0.212685	---	29.02	52.90	23.88	1000.0	9.000	N	9.8
0.212685	40.33	---	63.10	22.77	1000.0	9.000	N	9.8
0.636555	---	15.09	46.00	30.91	1000.0	9.000	N	9.9
0.636555	36.67	---	56.00	19.33	1000.0	9.000	N	9.9
0.663420	---	29.84	46.00	16.16	1000.0	9.000	N	9.9
0.663420	39.92	---	56.00	16.08	1000.0	9.000	N	9.9
2.615610	---	21.41	46.00	24.59	1000.0	9.000	N	9.8
2.615610	32.41	---	56.00	23.59	1000.0	9.000	N	9.8
2.755905	---	23.15	46.00	22.85	1000.0	9.000	N	9.8
2.755905	33.29	---	56.00	22.71	1000.0	9.000	N	9.8

Plot 7-103. Line Conducted Plot (N) ANT 1 – CH 9

FCC ID: A3LSMS916U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010097-18.A3L	Test Dates: 10/4 – 10/24/2022	EUT Type: Portable Handset	Page 79 of 82

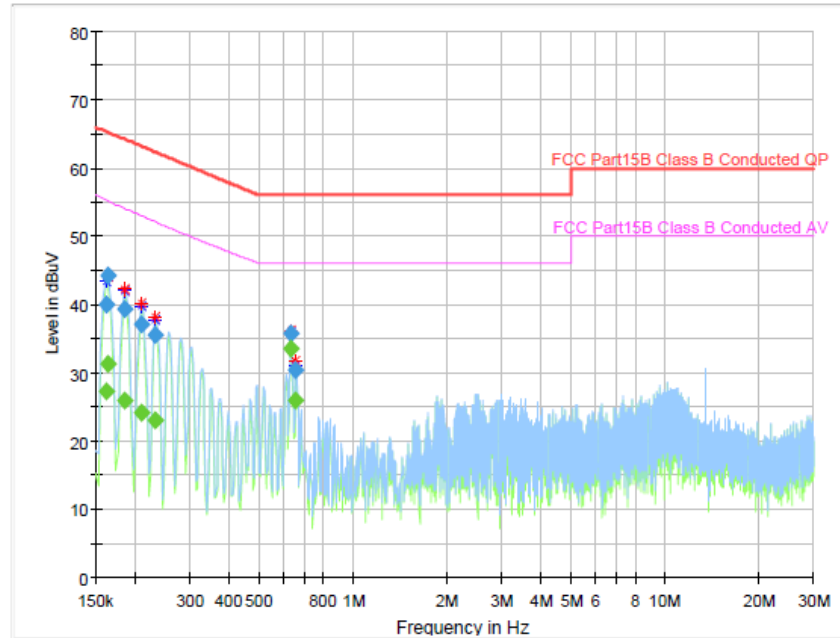


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.161940	---	27.36	55.30	27.95	1000.0	9.000	L1	9.9
0.161940	40.09	---	65.36	25.27	1000.0	9.000	L1	9.9
0.164925	---	31.22	55.14	23.92	1000.0	9.000	L1	9.9
0.164925	44.27	---	65.21	20.95	1000.0	9.000	L1	9.9
0.185820	---	25.90	54.08	28.17	1000.0	9.000	L1	9.9
0.185820	39.34	---	64.22	24.88	1000.0	9.000	L1	9.9
0.209700	---	24.16	53.02	28.86	1000.0	9.000	L1	9.8
0.209700	37.01	---	63.22	26.21	1000.0	9.000	L1	9.8
0.233580	---	23.02	52.09	29.07	1000.0	9.000	L1	9.7
0.233580	35.51	---	62.32	26.81	1000.0	9.000	L1	9.7
0.636555	---	33.44	46.00	12.57	1000.0	9.000	L1	9.9
0.636555	35.72	---	56.00	20.28	1000.0	9.000	L1	9.9
0.657450	---	25.94	46.00	20.06	1000.0	9.000	L1	9.9
0.657450	30.42	---	56.00	25.58	1000.0	9.000	L1	9.9

Plot 7-104. Line Conducted Plot (L1) ANT 2 – CH 9

FCC ID: A3LSMS916U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010097-18.A3L	Test Dates: 10/4 – 10/24/2022	EUT Type: Portable Handset	Page 80 of 82

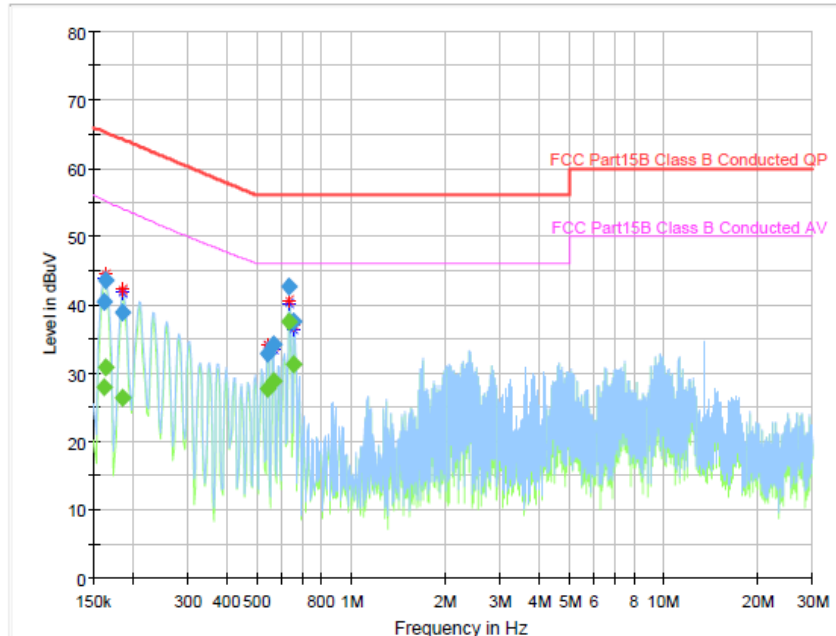

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.161940	---	27.92	55.30	27.38	1000.0	9.000	N	9.9
0.161940	40.53	---	65.36	24.84	1000.0	9.000	N	9.9
0.164925	---	30.92	55.14	24.22	1000.0	9.000	N	9.9
0.164925	43.66	---	65.21	21.55	1000.0	9.000	N	9.9
0.185820	---	26.45	54.08	27.62	1000.0	9.000	N	9.9
0.185820	38.93	---	64.22	25.30	1000.0	9.000	N	9.9
0.541035	---	27.78	46.00	18.22	1000.0	9.000	N	9.9
0.541035	32.85	---	56.00	23.15	1000.0	9.000	N	9.9
0.564915	---	28.81	46.00	17.19	1000.0	9.000	N	9.9
0.564915	34.19	---	56.00	21.81	1000.0	9.000	N	9.9
0.636555	---	37.49	46.00	8.51	1000.0	9.000	N	9.9
0.636555	42.68	---	56.00	13.32	1000.0	9.000	N	9.9
0.657450	---	31.28	46.00	14.72	1000.0	9.000	N	9.9
0.657450	37.54	---	56.00	18.46	1000.0	9.000	N	9.9

Plot 7-105. Line Conducted Plot (N) ANT 2 – CH 9

FCC ID: A3LSMS916U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010097-18.A3L	Test Dates: 10/4 – 10/24/2022	EUT Type: Portable Handset	Page 81 of 82

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMS916U** has been tested to comply with the requirements specified in §15.519 and §15.521 of the FCC rules.

FCC ID: A3LSMS916U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010097-18.A3L	Test Dates: 10/4 – 10/24/2022	EUT Type: Portable Handset	Page 82 of 82