


SAMSUNG FCC ID: A3LSPHA760 -- 835MHz AMPS Head SAR

SAM(900MHz) Phantom; Right Hand Section; Probe:ET3DV6 - SN1735; ConvF(7.00,7.00,7.00)
Head 835 MHz: $\sigma = 0.89$ mho/m $\epsilon_r = 41.3$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0
SAR (1g): 1.40 mW/g


SAMSUNG Tri-Mode Dual-Band Analog/PCS Phone(AMPS/CDMA) Model: SPH-A760
AMPS Mode, Ch.991 [824.04MHz]; Extended Battery; Meas. Ambient Temp. (°C) - 22.5
Conducted Power=26dBm; Right Head Phantom, Cheek/Touch Position; Meas. Tissue Temp. (°C) - 21.7
Test Date--05/21/2004 [FCC/OET Bulletin 65-Supplement C, July 2001]

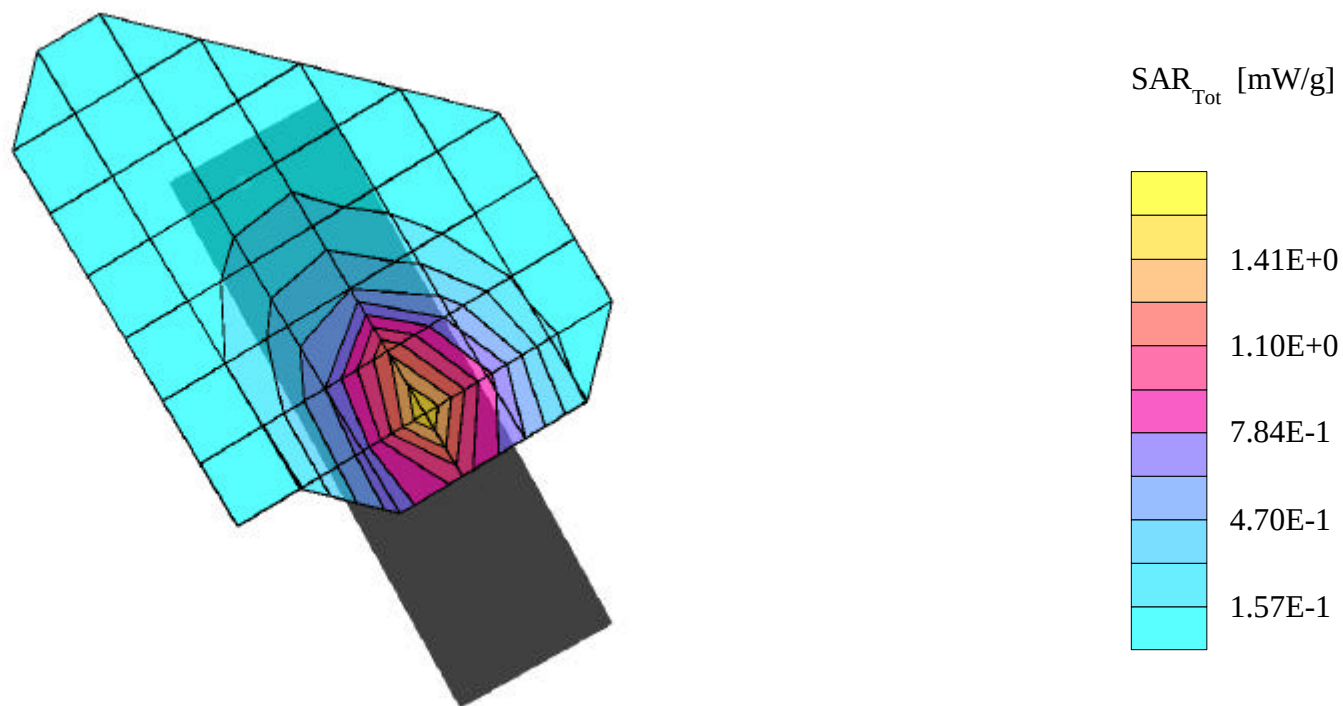

SAMSUNG FCC ID: A3LSPHA760 -- 835MHz AMPS Head SAR

SAM(900MHz) Phantom; Right Hand Section; Probe:ET3DV6 - SN1735; ConvF(7.00,7.00,7.00)
Head 835 MHz: $\sigma = 0.89$ mho/m $\epsilon_r = 41.3$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0
SAR (1g): 0.373 mW/g


SAMSUNG Tri-Mode Dual-Band Analog/PCS Phone(AMPS/CDMA) Model: SPH-A760
AMPS Mode, Ch.383 [836.49MHz]; Extended Battery; Meas. Ambient Temp. (°C) - 22.5
Conducted Power=26dBm; Right Head Phantom, Ear/Tilt 15 deg Position; Meas. Tissue Temp. (°C) - 21.7
Test Date--05/21/2004 [FCC/OET Bulletin 65-Supplement C, July 2001]

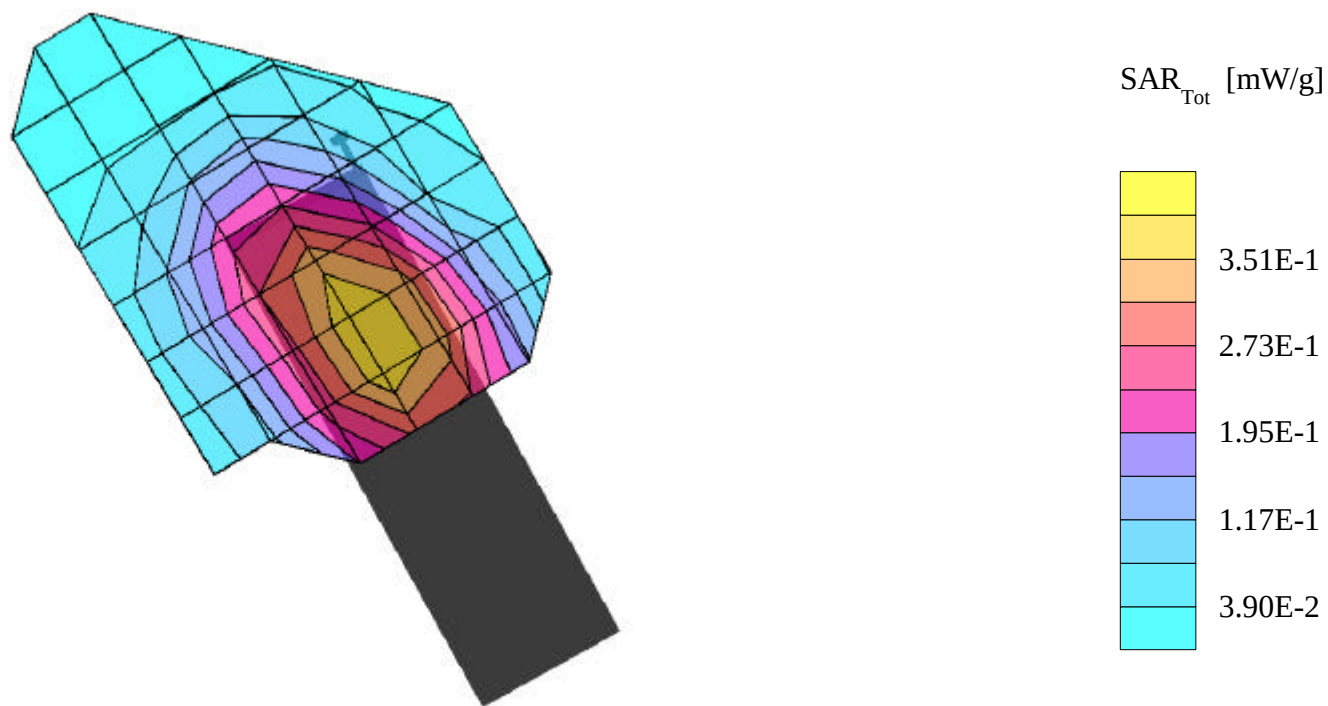

SAMSUNG FCC ID: A3LSPHA760 -- 835MHz AMPS Head SAR

SAM(900MHz) Phantom; Left Hand Section; Probe:ET3DV6 - SN1735; ConvF(7.00,7.00,7.00)
Head 835 MHz: $\sigma = 0.89$ mho/m $\epsilon_r = 41.3$ $\rho = 1.00$ g/cm³ ; Antenna Position -- In; Crest Factor 1.0
SAR (1g): 1.36 mW/g


SAMSUNG Tri-Mode Dual-Band Analog/PCS Phone(AMPS/CDMA) Model: SPH-A760
AMPS Mode, Ch.991 [824.04MHz]; Extended Battery; Meas. Ambient Temp. (°C) - 22.5
Conducted Power=26dBm; Left Head Phantom, Cheek/Touch Position; Meas. Tissue Temp. (°C) - 21.7
Test Date--05/21/2004 [FCC/OET Bulletin 65-Supplement C, July 2001]

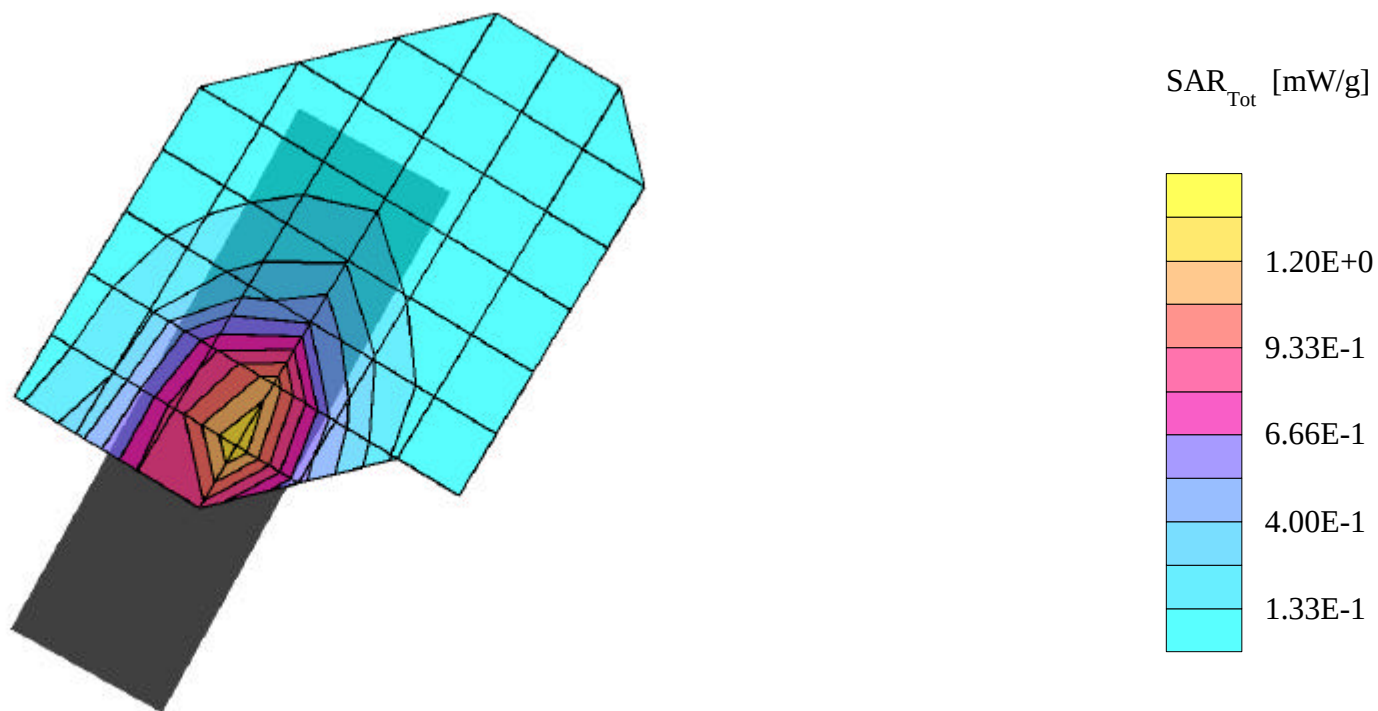

SAMSUNG FCC ID: A3LSPHA760 -- 835MHz AMPS Head SAR

SAM(900MHz) Phantom; Left Hand Section; Probe:ET3DV6 - SN1735; ConvF(7.00,7.00,7.00)
Head 835 MHz: $\sigma = 0.89$ mho/m $\epsilon_r = 41.3$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0
SAR (1g): 0.331 mW/g

SAMSUNG Tri-Mode Dual-Band Analog/PCS Phone(AMPS/CDMA) Model: SPH-A760
AMPS Mode, Ch.991 [824.04MHz]; Extended Battery; Meas. Ambient Temp. (°C) - 22.5
Conducted Power=26dBm; Left Head Phantom, Ear/Tilt 15 deg Position; Meas. Tissue Temp. (°C) - 21.7
Test Date--05/21/2004 [FCC/OET Bulletin 65-Supplement C, July 2001]

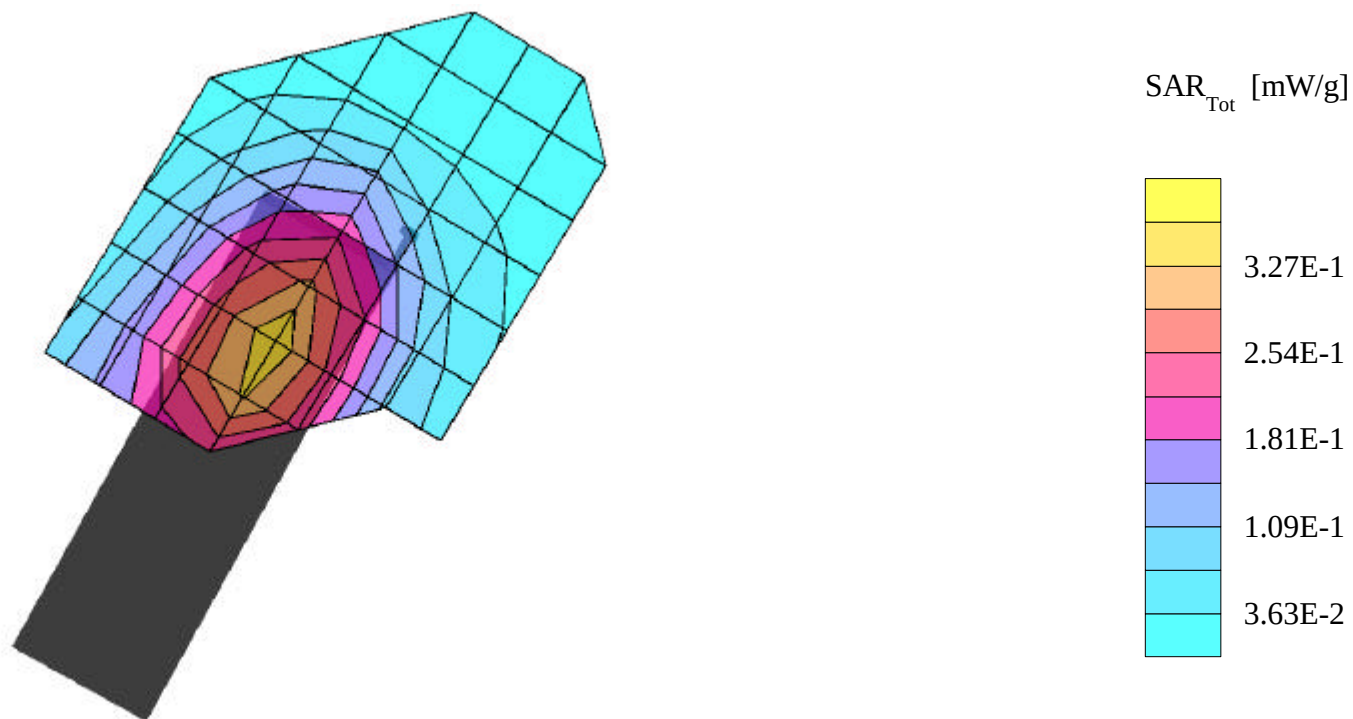

SAMSUNG FCC ID: A3LSPHA760 -- 835MHz CDMA Head SAR

SAM(900MHz) Phantom; Right Hand Section; Probe:ET3DV6 - SN1735; ConvF(7.00,7.00,7.00)

Head 835 MHz: $\sigma = 0.89$ mho/m $\epsilon_r = 41.3$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 1.13 mW/g

SAMSUNG Tri-Mode Dual-Band Analog/PCS Phone(AMPS/CDMA) Model: SPH-A760

CDMA Mode, Ch.1013 [824.7MHz]; Extended Battery; Meas. Ambient Temp. (°C) - 22.5

Conducted Power=25dBm; Right Head Phantom, Cheek/Touch Position; Meas. Tissue Temp. (°C) - 21.8

Test Date--05/21/2004 [FCC/OET Bulletin 65-Supplement C, July 2001]

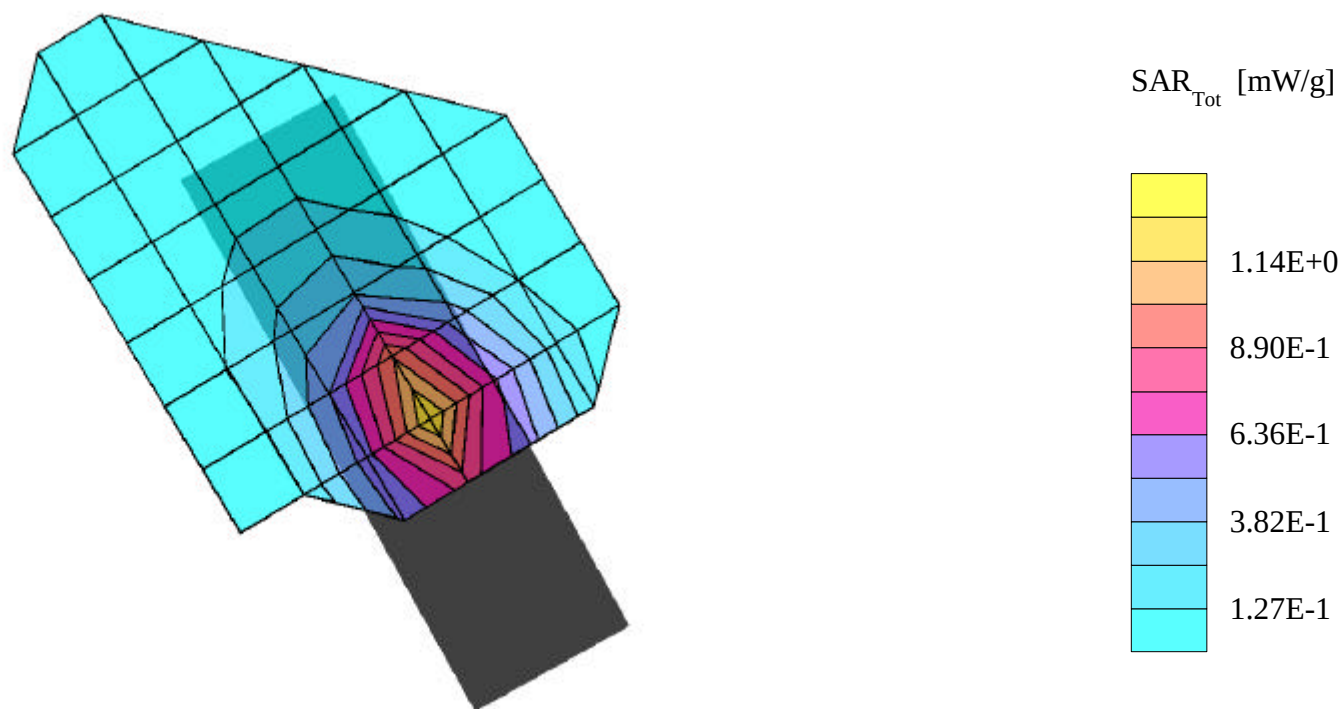

SAMSUNG FCC ID: A3LSPHA760 -- 835MHz CDMA Head SAR

SAM(900MHz) Phantom; Right Hand Section; Probe:ET3DV6 - SN1735; ConvF(7.00,7.00,7.00)

Head 835 MHz: $\sigma = 0.89$ mho/m $\epsilon_r = 41.3$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.283 mW/g

SAMSUNG Tri-Mode Dual-Band Analog/PCS Phone(AMPS/CDMA) Model: SPH-A760

CDMA Mode, Ch.1013 [824.7MHz]; Extended Battery; Meas. Ambient Temp. (°C) - 22.5

Conducted Power=25dBm; Right Head Phantom, Ear/Tilt 15 deg Position; Meas. Tissue Temp. (°C) - 21.8


Test Date--05/21/2004 [FCC/OET Bulletin 65-Supplement C, July 2001]

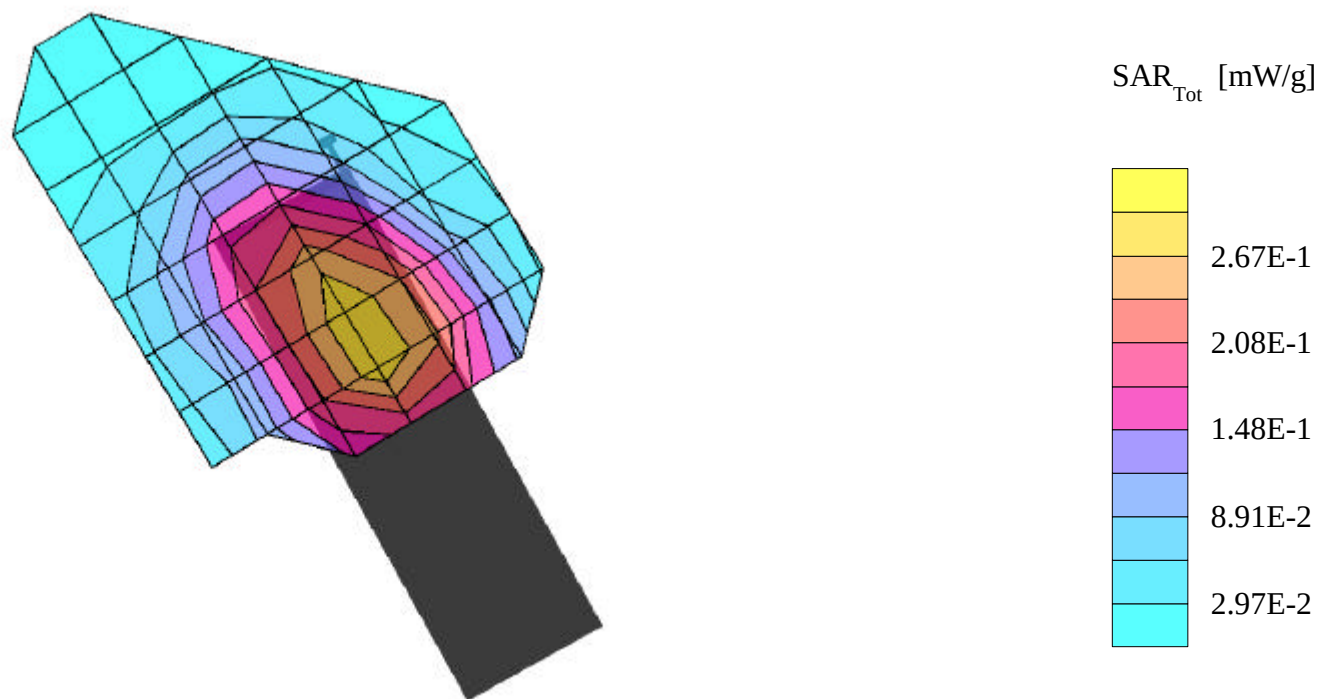

SAMSUNG FCC ID: A3LSPHA760 -- 835MHz CDMA Head SAR

SAM(900MHz) Phantom; Left Hand Section; Probe:ET3DV6 - SN1735; ConvF(7.00,7.00,7.00)
Head 835 MHz: $\sigma = 0.89$ mho/m $\epsilon_r = 41.3$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0
SAR (1g): 1.10 mW/g


SAMSUNG Tri-Mode Dual-Band Analog/PCS Phone(AMPS/CDMA) Model: SPH-A760
CDMA Mode, Ch.1013 [824.7MHz]; Extended Battery; Meas. Ambient Temp. (°C) - 22.5
Conducted Power=25dBm; Left Head Phantom, Cheek/Touch Position; Meas. Tissue Temp. (°C) - 21.8
Test Date--05/21/2004 [FCC/OET Bulletin 65-Supplement C, July 2001]

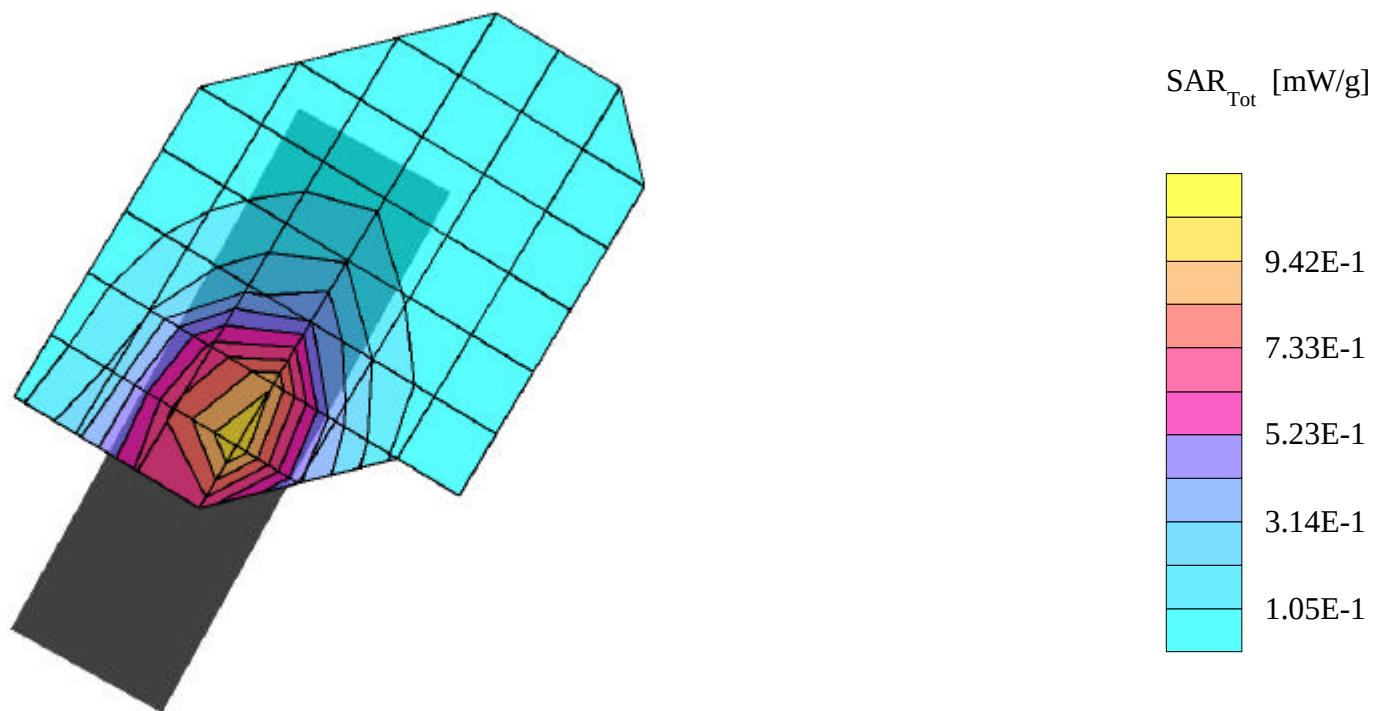

SAMSUNG FCC ID: A3LSPHA760 -- 835MHz CDMA Head SAR

SAM(900MHz) Phantom; Left Hand Section; Probe:ET3DV6 - SN1735; ConvF(7.00,7.00,7.00)
Head 835 MHz: $\sigma = 0.89$ mho/m $\epsilon_r = 41.3$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0
SAR (1g): 0.279 mW/g

SAMSUNG Tri-Mode Dual-Band Analog/PCS Phone(AMPS/CDMA) Model: SPH-A760
CDMA Mode, Ch.363 [835.89MHz]; Extended Battery; Meas. Ambient Temp. (°C) - 22.5
Conducted Power=25dBm; Left Head Phantom, Ear/Tilt 15 deg Position; Meas. Tissue Temp. (°C) - 21.8
Test Date--05/21/2004 [FCC/OET Bulletin 65-Supplement C, July 2001]

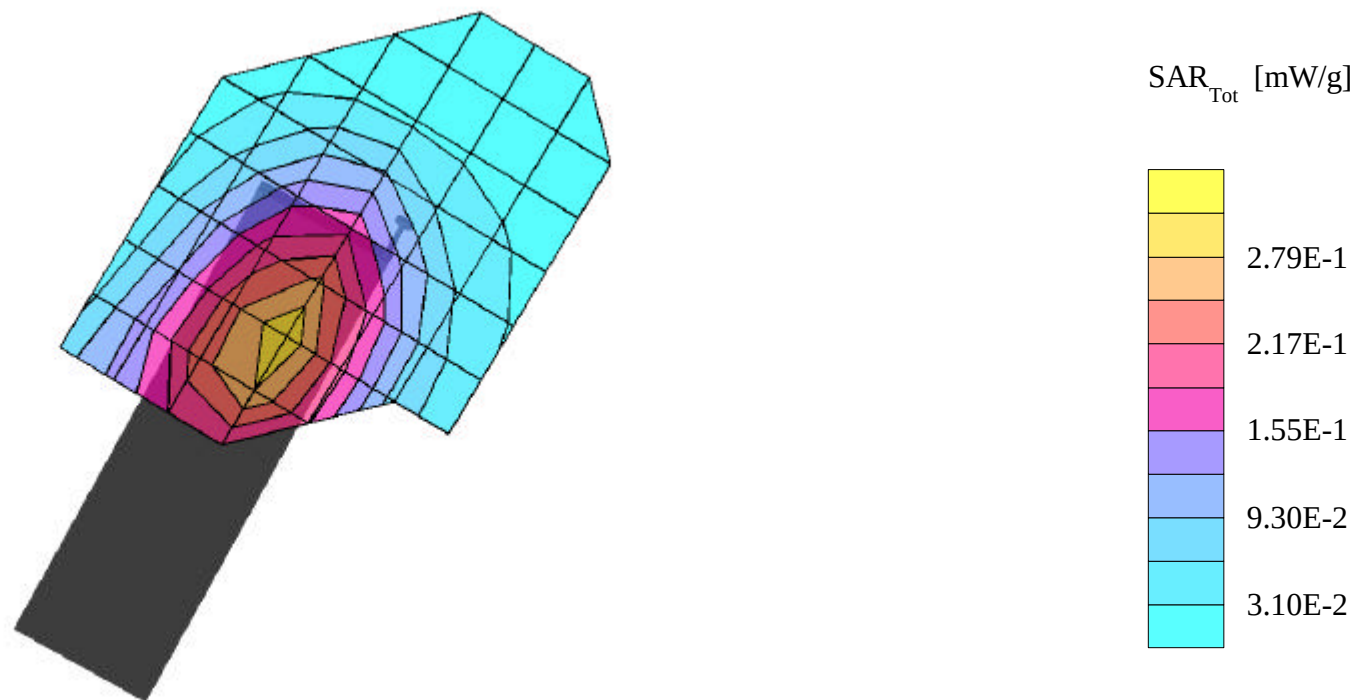

SAMSUNG FCC ID: A3LSPHA760 -- 1900MHz PCS CDMA Head SAR

SAM(1800MHz) Phantom; Right Hand Section; Probe:ET3DV6 - SN1735; ConvF(5.60,5.60,5.60)

Head 1900 MHz: $\sigma = 1.38$ mho/m $\epsilon_r = 38.5$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 1.27 mW/g

SAMSUNG Tri-Mode Dual-Band Analog/PCS Phone(AMPS/CDMA) Model: SPH-A760

PCS Mode, Ch.25 [1851.25MHz]; Extended Battery; Meas. Ambient Temp. (°C) - 22.3

Conducted Power=25dBm; Right Head Phantom, Cheek/Touch Position; Meas. Tissue Temp. (°C) - 21.5


Test Date--05/19/2004 [FCC/OET Bulletin 65-Supplement C, July 2001]

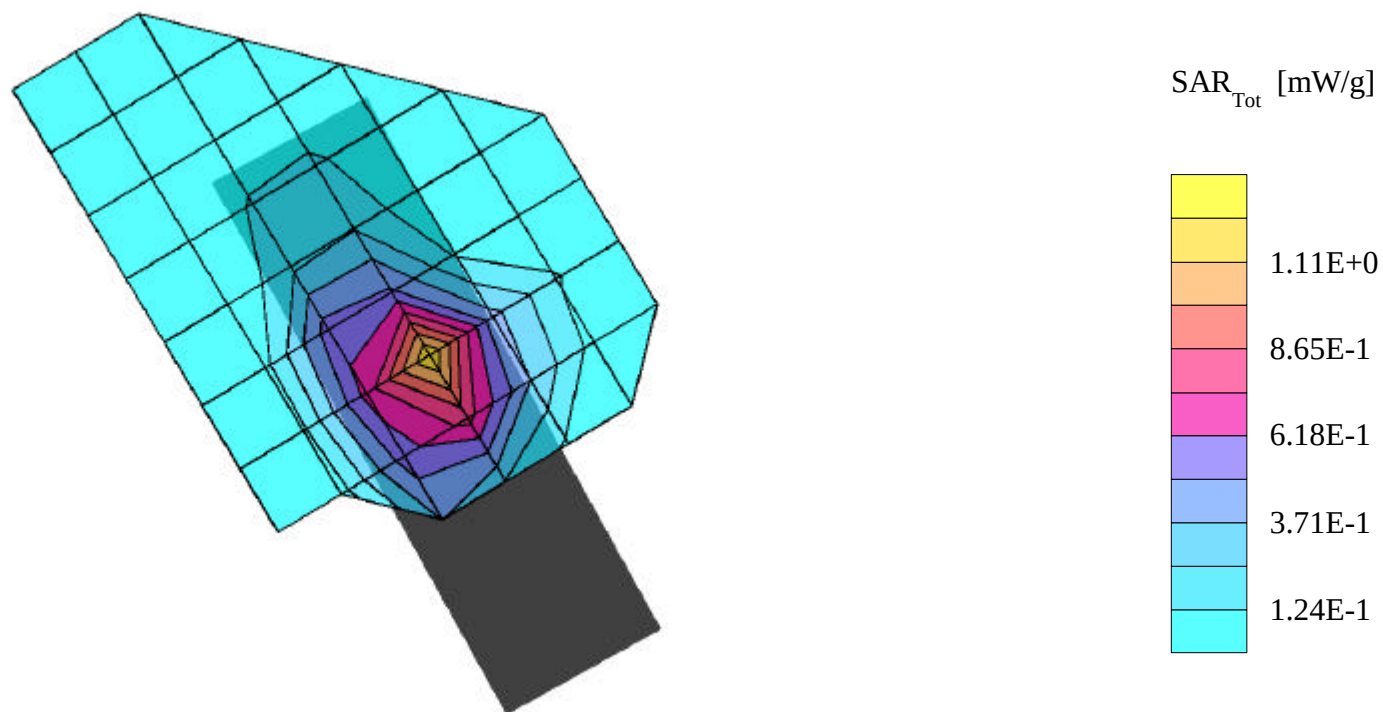

SAMSUNG FCC ID: A3LSPHA760 -- 1900MHz PCS CDMA Head SAR

SAM(1800MHz) Phantom; Right Hand Section; Probe:ET3DV6 - SN1735; ConvF(5.60,5.60,5.60)
Head 1900 MHz: $\sigma = 1.38$ mho/m $\epsilon_r = 38.5$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0
SAR (1g): 0.269 mW/g

SAMSUNG Tri-Mode Dual-Band Analog/PCS Phone(AMPS/CDMA) Model: SPH-A760
PCS Mode, Ch.600 [1880MHz]; Extended Battery; Meas. Ambient Temp. (°C) - 22.3
Conducted Power=25dBm; Right Head Phantom, Ear/Tilt 15 deg Position; Meas. Tissue Temp. (°C) - 21.5
Test Date--05/19/2004 [FCC/OET Bulletin 65-Supplement C, July 2001]

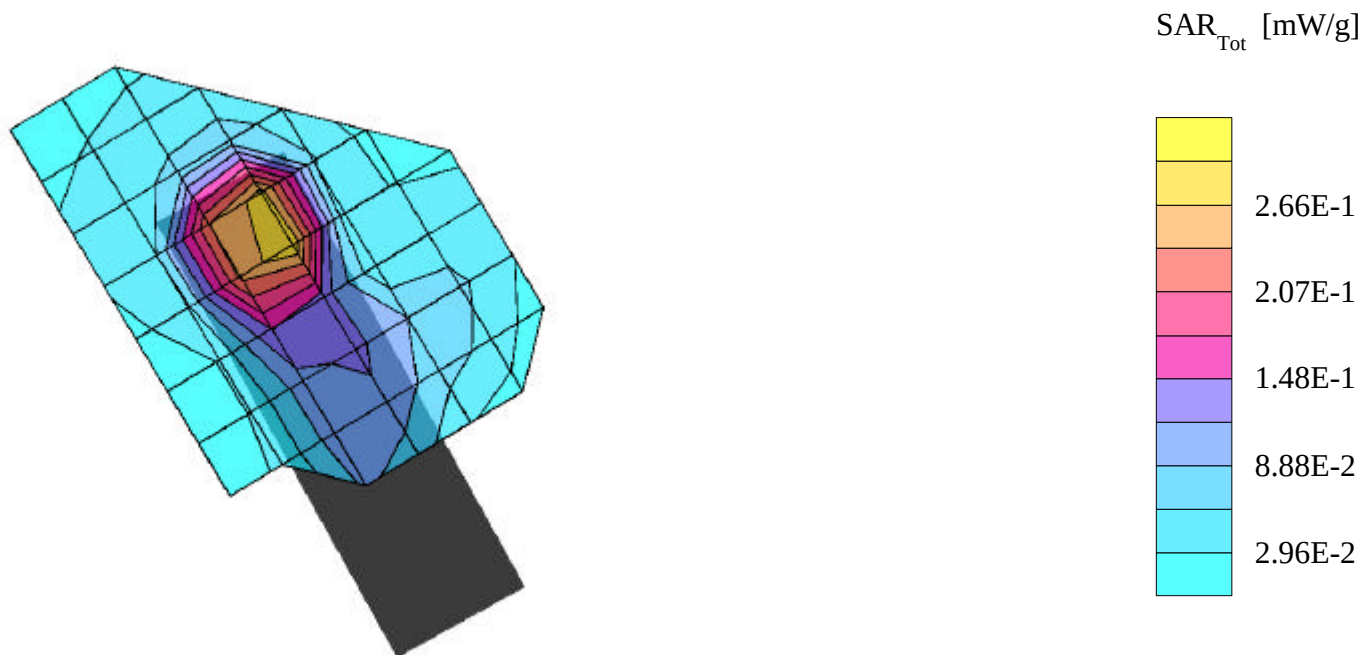

SAMSUNG FCC ID: A3LSPHA760 -- 1900MHz PCS CDMA Head SAR

SAM(1800MHz) Phantom; Left Hand Section; Probe:ET3DV6 - SN1735; ConvF(5.60,5.60,5.60)

Head 1900 MHz: $\sigma = 1.38$ mho/m $\epsilon_r = 38.5$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 1.35 mW/g

SAMSUNG Tri-Mode Dual-Band Analog/PCS Phone(AMPS/CDMA) Model: SPH-A760

PCS Mode, Ch.600 [1880MHz]; Extended Battery; Meas. Ambient Temp. (°C) - 22.3

Conducted Power=25dBm; Left Head Phantom, Cheek/Touch Position; Meas. Tissue Temp. (°C) - 21.5


Test Date--05/19/2004 [FCC/OET Bulletin 65-Supplement C, July 2001]

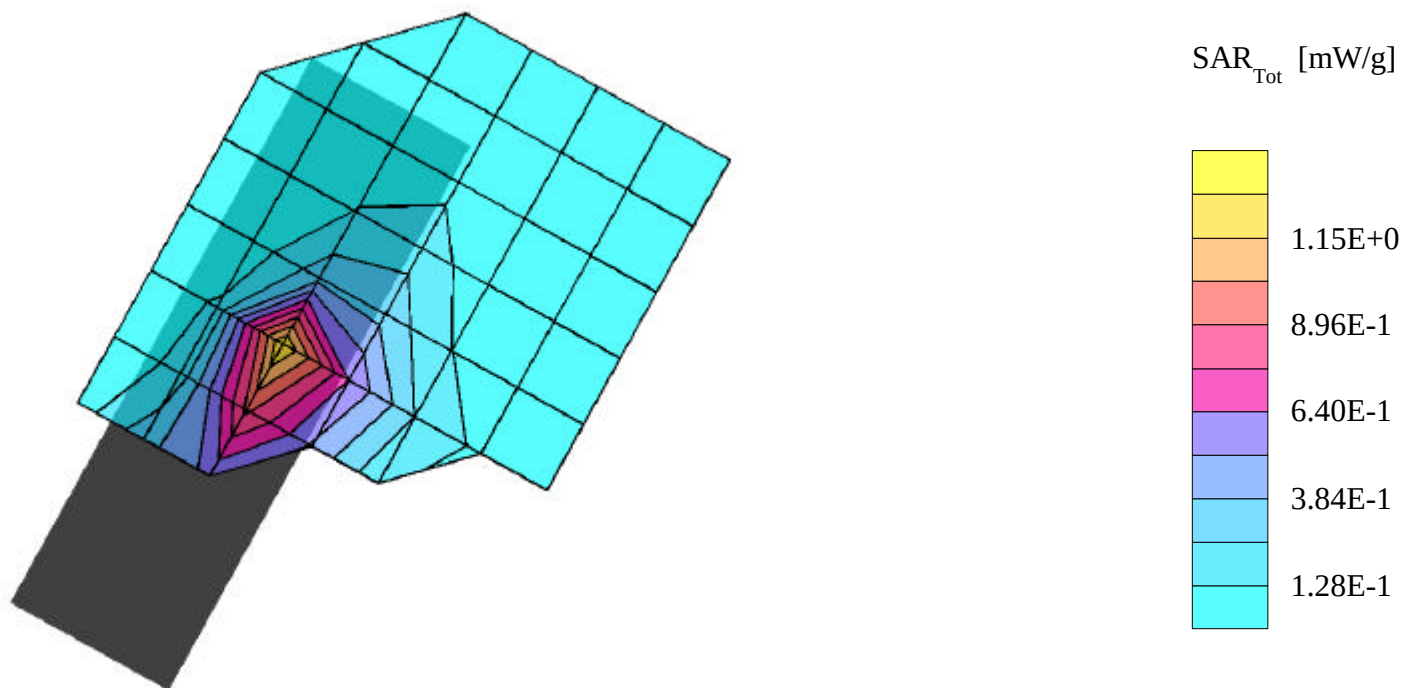

SAMSUNG FCC ID: A3LSPHA760 -- 1900MHz PCS CDMA Head SAR

SAM(1800MHz) Phantom; Left Hand Section; Probe:ET3DV6 - SN1735; ConvF(5.60,5.60,5.60)
Head 1900 MHz: $\sigma = 1.38 \text{ mho/m}$ $\epsilon_r = 38.5$ $\rho = 1.00 \text{ g/cm}^3$; Antenna Position -- In; Crest Factor 1.0
SAR (1g): 0.258 mW/g

SAMSUNG Tri-Mode Dual-Band Analog/PCS Phone(AMPS/CDMA) Model: SPH-A760
PCS Mode, Ch.600 [1880MHz]; Extended Battery; Meas. Ambient Temp. (°C) - 22.3
Conducted Power=25dBm; Left Head Phantom, Ear/Tilt 15 deg Position; Meas. Tissue Temp. (°C) - 21.5
Test Date--05/19/2004 [FCC/OET Bulletin 65-Supplement C, July 2001]

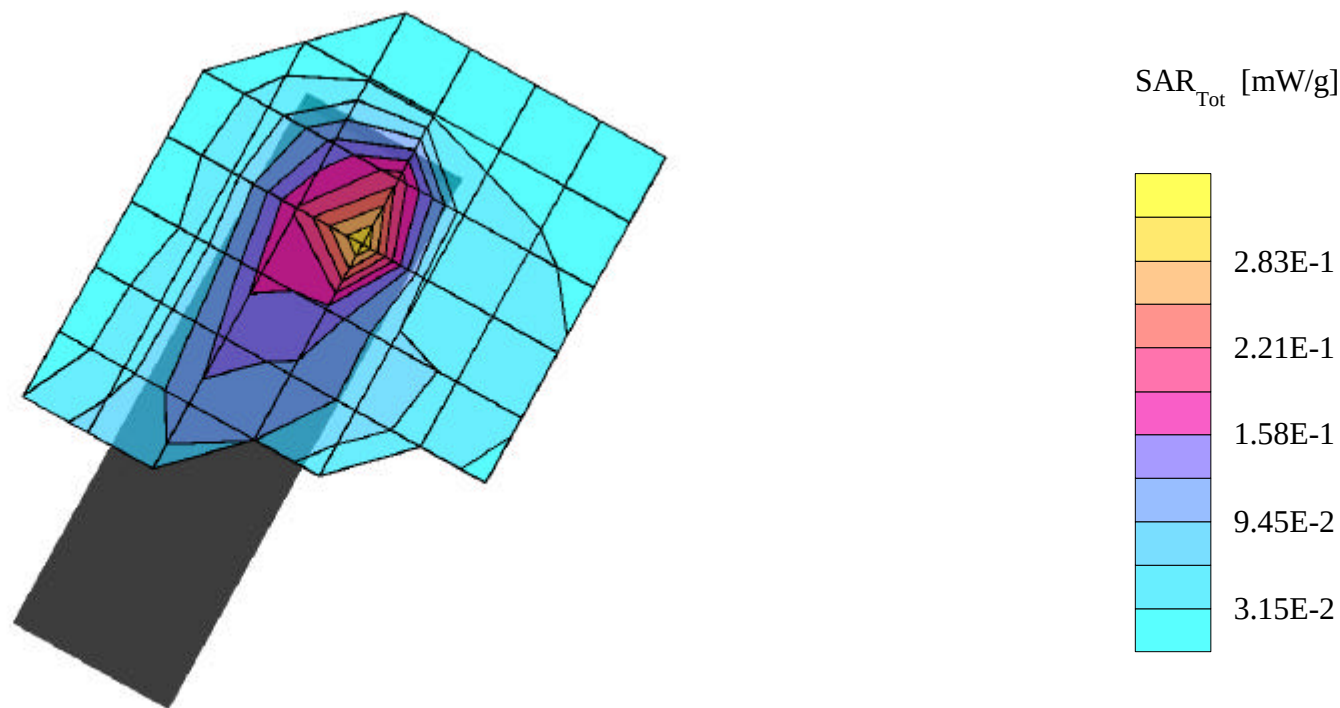

SAMSUNG FCC ID: A3LSPHA760 -- 835MHz AMPS Body SAR

SAM(900MHz) Phantom; Flat Section; Probe:ET3DV6 - SN1735; ConvF(6.90,6.90,6.90)

Body 835 MHz: $\sigma = 0.95$ mho/m $\epsilon_r = 54.5$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 1.08 mW/g

SAMSUNG Tri-Mode Dual-Band Analog/PCS Phone(AMPS/CDMA) Model: SCH-A760

AMPS Mode, Ch.991 [824.04MHz]; Extended Battery; Meas. Ambient Temp. (°C) - 22.5

Conducted Power=26dBm; with holster, Tissue Temp. (°C) - 21.8

Test Date--05/20/2004 [FCC/OET Bulletin 65-Supplement C, July 2001]

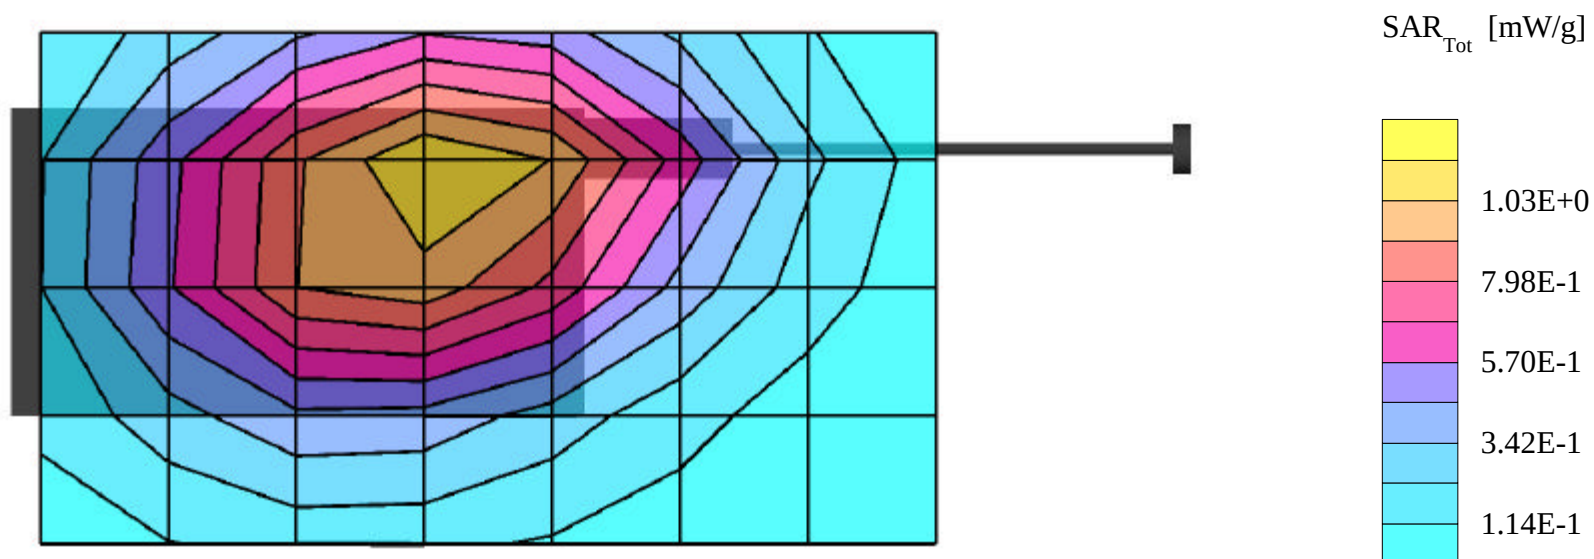

SAMSUNG FCC ID: A3LSPHA760 -- 835MHz CDMA Body SAR

SAM(900MHz) Phantom; Flat Section; Probe:ET3DV6 - SN1735; ConvF(6.90,6.90,6.90)

Body 835 MHz: $\sigma = 0.95$ mho/m $\epsilon_r = 54.5$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.900 mW/g

SAMSUNG Tri-Mode Dual-Band Analog/PCS Phone(AMPS/CDMA) Model: SCH-A760

CDMA Mode, Ch.1013 [824.7MHz]; Extended Battery; Meas. Ambient Temp. (°C) - 22.5

Conducted Power=25dBm; with holster, Tissue Temp. (°C) - 21.8

Test Date--05/20/2004 [FCC/OET Bulletin 65-Supplement C, July 2001]

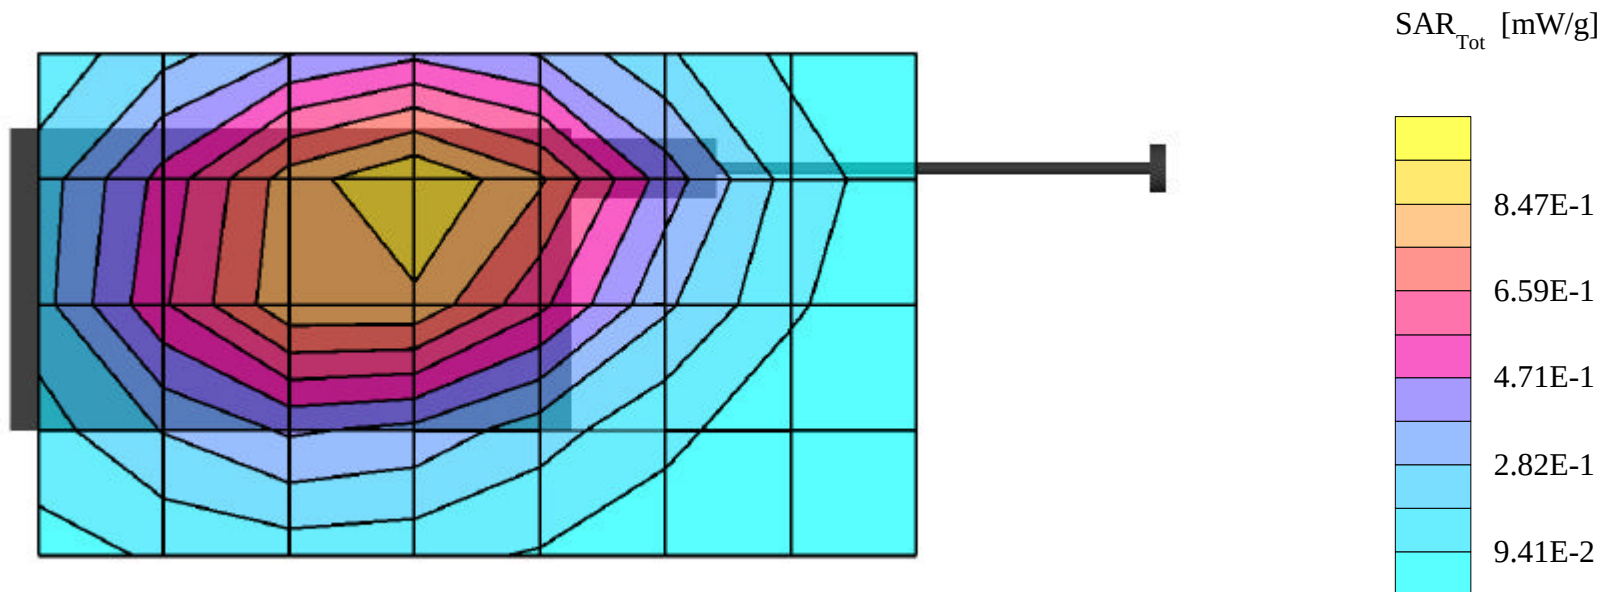

SAMSUNG FCC ID: A3LSPHA760 -- 1900MHz PCS CDMA Body SAR

SAM(1800MHz) Phantom; Flat Section; Probe:ET3DV6 - SN1735; ConvF(4.70,4.70,4.70)

Body 1900 MHz: $\sigma = 1.51$ mho/m $\epsilon_r = 51.5$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 1.06 mW/g

SAMSUNG Tri-Mode Dual-Band Analog/PCS Phone(AMPS/CDMA) Model: SCH-A760

PCS Mode, Ch.600 [1880MHz]; Extended Battery; Meas. Ambient Temp. (°C) - 22.6

Conducted Power=25dBm; with holster, Tissue Temp. (°C) - 21.6

Test Date--05/20/2004 [FCC/OET Bulletin 65-Supplement C, July 2001]

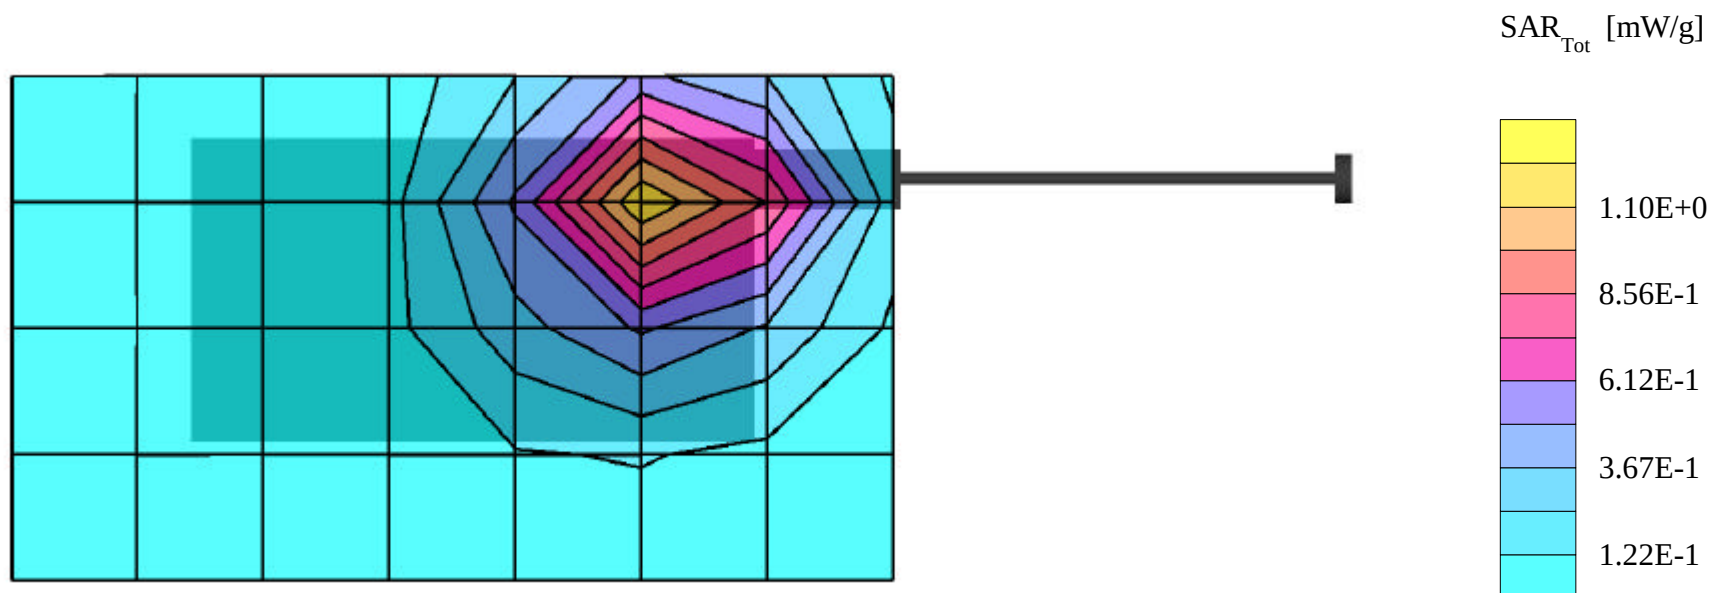

SAMSUNG FCC ID: A3LSPHA760 -- 1900MHz PCS CDMA Face SAR

SAM(1800MHz) Phantom; Flat Section; Probe:ET3DV6 - SN1735; ConvF(5.60,5.60,5.60)

Head 1900 MHz: $\sigma = 1.38$ mho/m $\epsilon_r = 38.5$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.231 mW/g

SAMSUNG Tri-Mode Dual-Band Analog/PCS Phone(AMPS/CDMA) Model: SCH-A760

PCS Mode, Ch.600 [1880MHz]; Extended Battery; Meas. Ambient Temp. (°C) - 22.3

Conducted Power=25dBm; Spacing=2.5cm from flat phantom to phone, w/o beltclip or holster, Tissue Temp. (°C) - 21.5


Test Date--05/19/2004 [FCC/OET Bulletin 65-Supplement C, July 2001]

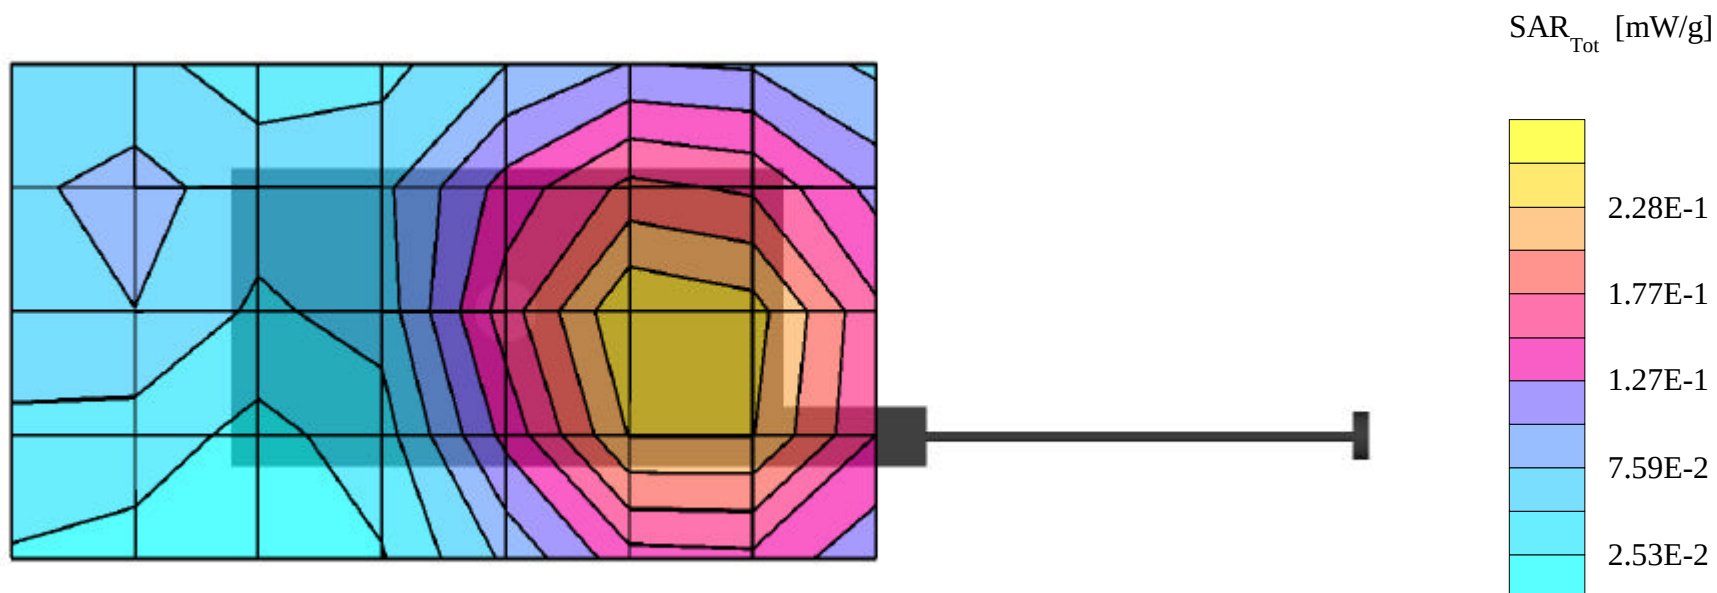

SAMSUNG FCC ID: A3LSPHA760 -- 835MHz AMPS Head SAR

SAM(900MHz) Phantom; Right Hand Section; Probe:ET3DV6 - SN1735; ConvF(7.00,7.00,7.00)
Head 835 MHz: $\sigma = 0.89$ mho/m $\epsilon_r = 41.3$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0
SAR (1g): 1.40 mW/g

SAMSUNG Tri-Mode Dual-Band Analog/PCS Phone(AMPS/CDMA) Model: SPH-A760
AMPS Mode, Ch.991 [824.04MHz]; Extended Battery; Meas. Ambient Temp. (°C) - 22.5
Conducted Power=26dBm; Right Head Phantom, Cheek/Touch Position; Meas. Tissue Temp. (°C) - 21.7
Test Date--05/21/2004 [FCC/OET Bulletin 65-Supplement C, July 2001]

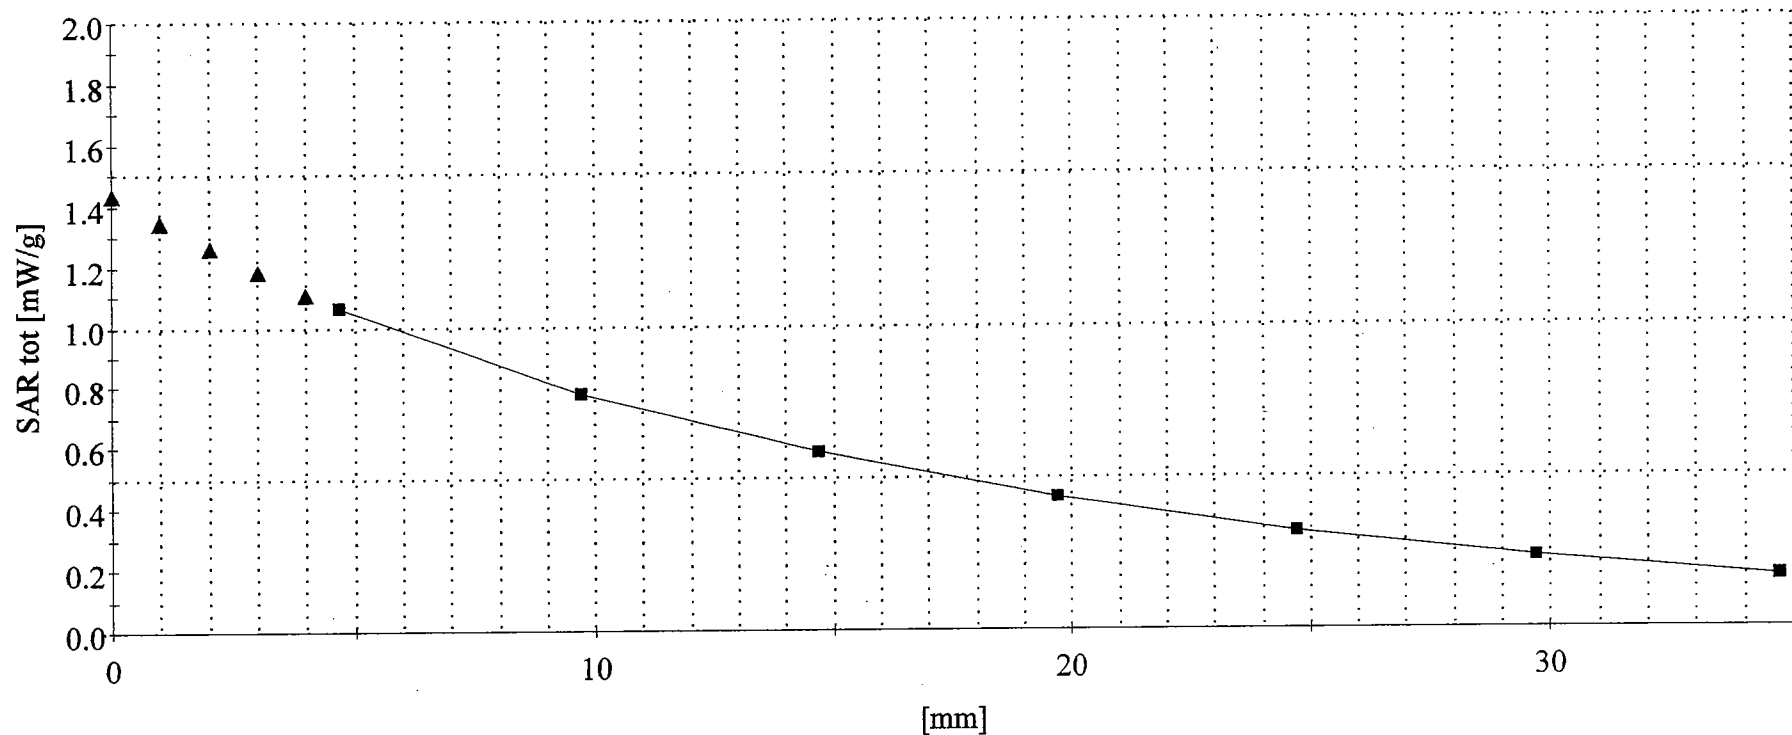

SAMSUNG FCC ID: A3LSPHA760 -- 835MHz CDMA Head SAR

SAM(900MHz) Phantom; Right Hand Section; Probe:ET3DV6 - SN1735; ConvF(7.00,7.00,7.00)

Head 835 MHz: $\sigma = 0.89$ mho/m $\epsilon_r = 41.3$ $\rho = 1.00$ g/cm³ ; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 1.13 mW/g

SAMSUNG Tri-Mode Dual-Band Analog/PCS Phone(AMPS/CDMA) Model: SPH-A760

CDMA Mode, Ch.1013 [824.7MHz]; Extended Battery; Meas. Ambient Temp. (°C) - 22.5

Conducted Power=25dBm; Right Head Phantom, Cheek/Touch Position; Meas. Tissue Temp. (°C) - 21.8

Test Date--05/21/2004 [FCC/OET Bulletin 65-Supplement C, July 2001]

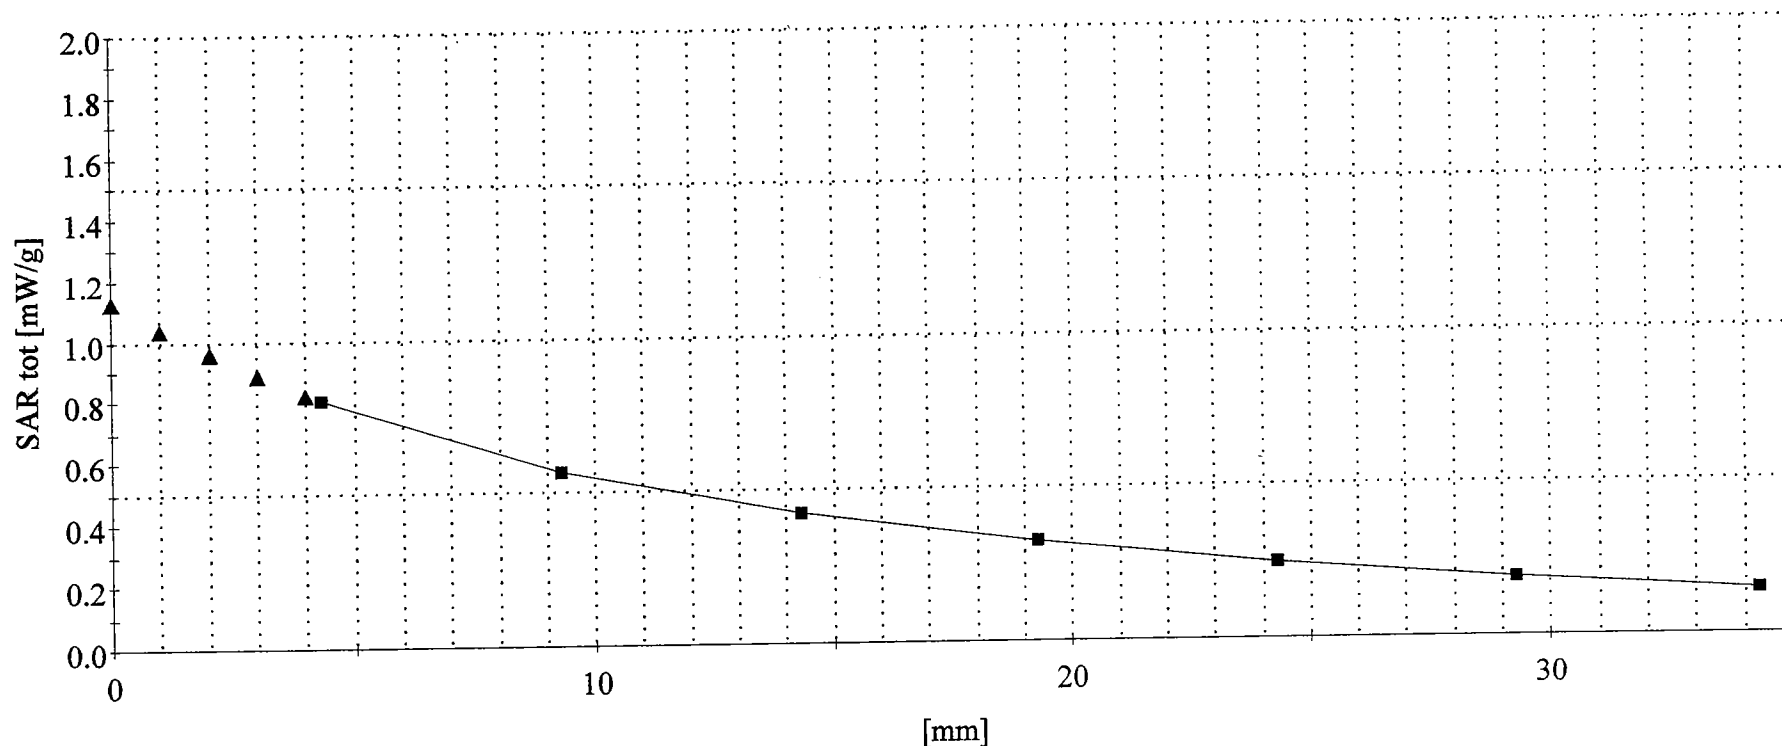

SAMSUNG FCC ID: A3LSPHA760 -- 1900MHz PCS CDMA Head SAR

SAM(1800MHz) Phantom; Left Hand Section; Probe:ET3DV6 - SN1735; ConvF(5.60,5.60,5.60)

Head 1900 MHz: $\sigma = 1.38$ mho/m $\epsilon_r = 38.5$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 1.35 mW/g

SAMSUNG Tri-Mode Dual-Band Analog/PCS Phone(AMPS/CDMA) Model: SPH-A760

PCS Mode, Ch.600 [1880MHz]; Extended Battery; Meas. Ambient Temp. (°C) - 22.3

Conducted Power=25dBm; Left Head Phantom, Cheek/Touch Position; Meas. Tissue Temp. (°C) - 21.5

Test Date--05/19/2004 [FCC/OET Bulletin 65-Supplement C, July 2001]

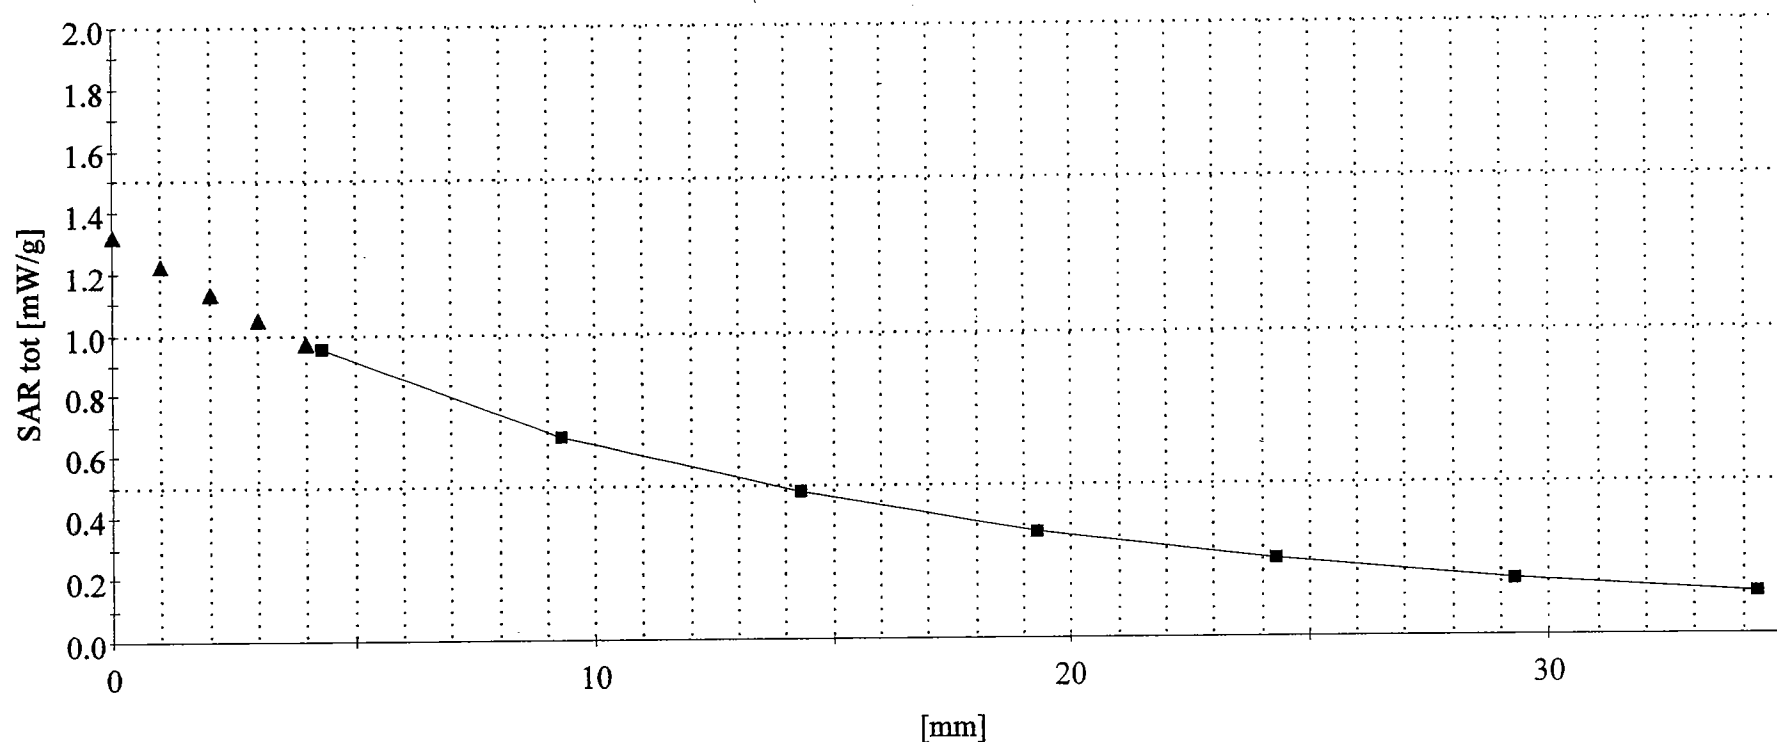

SAMSUNG FCC ID: A3LSPHA760 -- 835MHz AMPS Body SAR

SAM(900MHz) Phantom; Flat Section; Probe:ET3DV6 - SN1735; ConvF(6.90,6.90,6.90)

Body 835 MHz: $\sigma = 0.95$ mho/m $\epsilon_r = 54.5$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 1.08 mW/g

SAMSUNG Tri-Mode Dual-Band Analog/PCS Phone(AMPS/CDMA) Model: SCH-A760

AMPS Mode, Ch.991 [824.04MHz]; Extended Battery; Meas. Ambient Temp. (°C) - 22.5

Conducted Power=26dBm; with holster, Tissue Temp. (°C) - 21.8

Test Date--05/20/2004 [FCC/OET Bulletin 65-Supplement C, July 2001]

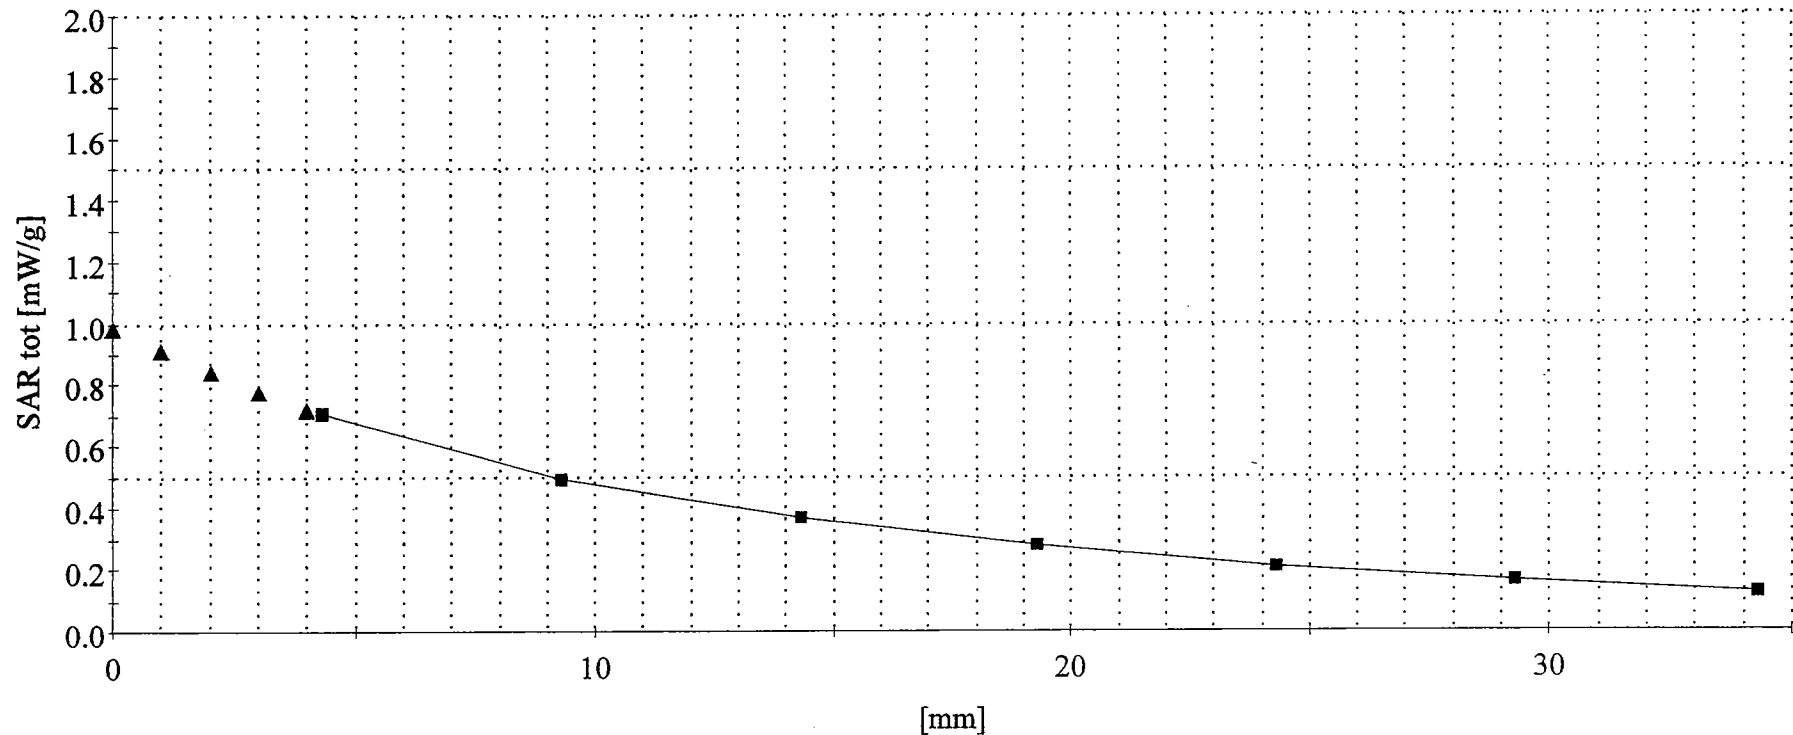

SAMSUNG FCC ID: A3LSPHA760 -- 835MHz CDMA Body SAR

SAM(900MHz) Phantom; Flat Section; Probe:ET3DV6 - SN1735; ConvF(6.90,6.90,6.90)

Body 835 MHz: $\sigma = 0.95$ mho/m $\epsilon_r = 54.5$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.900 mW/g

SAMSUNG Tri-Mode Dual-Band Analog/PCS Phone(AMPS/CDMA) Model: SCH-A760

CDMA Mode, Ch.1013 [824.7MHz]; Extended Battery; Meas. Ambient Temp. (°C) - 22.5

Conducted Power=25dBm; with holster, Tissue Temp. (°C) - 21.8

Test Date--05/20/2004 [FCC/OET Bulletin 65-Supplement C, July 2001]

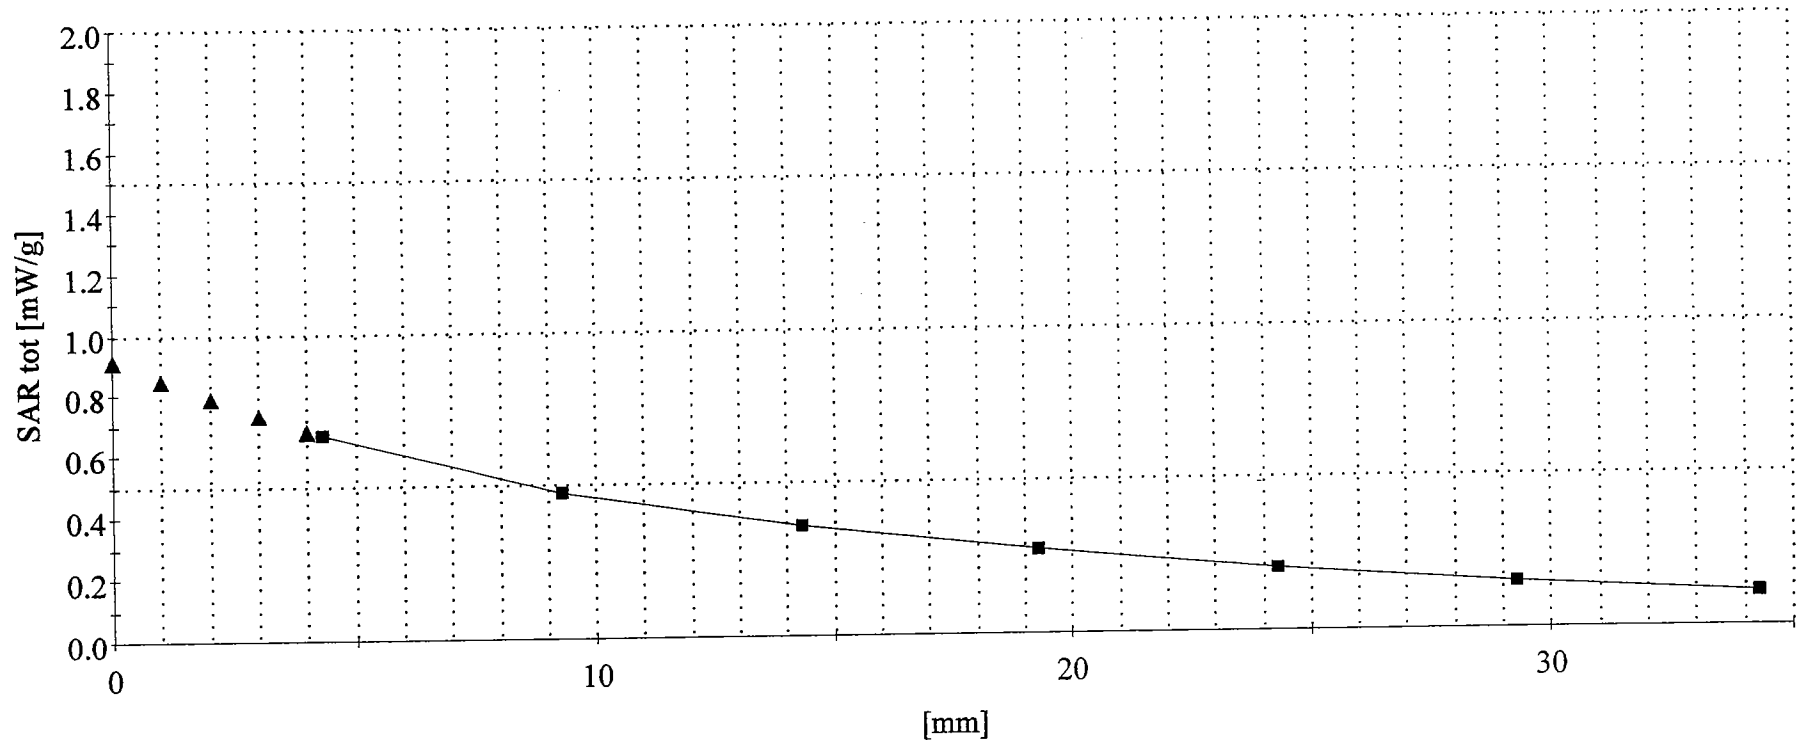

SAMSUNG FCC ID: A3LSPHA760 -- 1900MHz PCS CDMA Body SAR

SAM(1800MHz) Phantom; Flat Section; Probe:ET3DV6 - SN1735; ConvF(4.70,4.70,4.70)

Body 1900 MHz: $\sigma = 1.51$ mho/m $\epsilon_r = 51.5$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0

SAR (1g): 1.06 mW/g

SAMSUNG Tri-Mode Dual-Band Analog/PCS Phone(AMPS/CDMA) Model: SCH-A760

PCS Mode, Ch.600 [1880MHz]; Extended Battery; Meas. Ambient Temp. (°C) - 22.6

Conducted Power=25dBm; with holster, Tissue Temp. (°C) - 21.6

Test Date--05/20/2004 [FCC/OET Bulletin 65-Supplement C, July 2001]

