

RADIO PERFORMANCE TEST REPORT

Test Report No. : OT-215-RWD-101
Reception No. : 2104002159
Applicant : Samsung Electronics Co Ltd
Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey, 07058, United States
Manufacturer : Samsung Electronics Co Ltd
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do 16677, Korea
Type of Equipment : Wi-Fi/BT Transceiver
FCC ID. : A3LWCA736M
Model Name : WCA736M
Serial number : N/A
Total page of Report : 290 pages (including this page)
Date of Incoming : May 10, 2021
Date of issue : May 28, 2021


SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART E Section 15.407**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.





Tested by
 Ju Yun Park / Manager
 ONETECH Corp.

Reviewed by
 Ha-Ram Lee / Manager
 ONETECH Corp.

Approved by
 Ki-Hong, Nam / General Manager
 ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	9
2. TEST SUMMARY.....	10
2.1 TEST ITEMS AND RESULTS	10
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	10
2.3 RELATED SUBMITTAL(S) / GRANT(S)	10
2.4 PURPOSE OF THE TEST	10
2.5 TEST METHODOLOGY.....	10
2.6 TEST FACILITY.....	10
3. GENERAL INFORMATION.....	11
3.1 PRODUCT DESCRIPTION.....	11
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	16
4. EUT MODIFICATIONS.....	16
5. SYSTEM TEST CONFIGURATION	17
5.1 JUSTIFICATION.....	17
5.2 PERIPHERAL EQUIPMENT	17
5.3 MODE OF OPERATION DURING THE TEST	18
5.4 CONFIGURATION OF TEST SYSTEM.....	49
5.5 ANTENNA REQUIREMENT	49
6. PRELIMINARY TEST	49
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	49
6.2 GENERAL RADIATED EMISSIONS TESTS	49
7. MINIMUM 26 DB BANDWIDTH.....	50
7.1 OPERATING ENVIRONMENT	50
7.2 TEST SET-UP	50
7.3 TEST DATE	50
7.4 TEST DATA FOR 802.11A RLAN MODE.....	51
7.4.1 Test data for Antenna 0	51
7.4.2 Test data for Antenna 1	60
7.4.3 Test data for Staddle Channel_Antenna 0	69
7.4.4 Test data for Staddle Channel_Antenna 1	70
7.5 TEST DATA FOR 802.11N_HT20 RLAN MODE.....	71
7.5.1 Test data for Antenna 0	71

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

7.5.2 Test data for Antenna 1	80
7.4.3 Test data for Staddle Channel_Antenna 0	89
7.4.4 Test data for Staddle Channel_Antenna 1	90
7.6 TEST DATA FOR 802.11N_HT40 RLAN MODE	91
7.6.1 Test data for Antenna 0	91
7.6.2 Test data for Antenna 1	97
7.6.3 Test data for Staddle Channel_Antenna 0	103
7.6.4 Test data for Staddle Channel_Antenna 1	104
7.7 TEST DATA FOR 802.11AC_VHT80 RLAN MODE	105
7.7.1 Test data for Antenna 0	105
7.7.2 Test data for Antenna 1	108
7.7.3 Test data for Staddle Channel_Antenna 0	111
7.7.4 Test data for Staddle Channel_Antenna 1	112
8. 6 DB BANDWIDTH	113
8.1 OPERATING ENVIRONMENT	113
8.2 TEST SET-UP	113
8.3 TEST DATE	113
8.4 TEST DATA FOR 802.11A RLAN MODE	114
8.4.1 Test data for Antenna 0	114
8.4.2 Test data for Antenna 1	116
8.4.3 Test data for Staddle Channel_Antenna 0	118
8.4.4 Test data for Staddle Channel_Antenna 1	119
8.5 TEST DATA FOR 802.11N_HT20 RLAN MODE	120
8.5.1 Test data for Antenna 0	120
8.5.2 Test data for Antenna 1	122
8.5.3 Test data for Staddle Channel_Antenna 0	124
8.5.4 Test data for Staddle Channel_Antenna 1	125
8.6 TEST DATA FOR 802.11N_HT40 RLAN MODE	126
8.6.1 Test data for Antenna 0	126
8.6.2 Test data for Antenna 1	128
8.6.3 Test data for Staddle Channel_Antenna 0	130
8.6.4 Test data for Staddle Channel_Antenna 1	131
8.7 TEST DATA FOR 802.11AC_VHT80 RLAN MODE	132
8.7.1 Test data for Antenna 0	132
8.7.2 Test data for Antenna 1	133
8.7.3 Test data for Staddle Channel_Antenna 0	134
8.7.4 Test data for Staddle Channel_Antenna 1	135

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

9. MAXIMUM CONDUCTED OUTPUT POWER.....	136
9.1 OPERATING ENVIRONMENT	136
9.2 TEST SET-UP	136
9.3 TEST DATE	136
9.4 TEST DATA FOR 802.11A RLAN MODE.....	137
9.4.1 Test data for Antenna 0	137
9.4.2 Test data for Antenna 1	138
9.4.3 Test data for Multiple Transmit	139
9.4.4 Test data for Staddle Channel_Antenna 0	140
9.4.5 Test data for Staddle Channel_Antenna 1	140
9.4.6 Test data for Staddle Channel_Multiple Transmit	140
9.5 TEST DATA FOR 802.11N_HT20 RLAN MODE	141
9.5.1 Test data for Antenna 0	141
9.5.2 Test data for Antenna 1	142
9.5.3 Test data for Multiple Transmit	143
9.5.4 Test data for Staddle Channel_Antenna 0	144
9.5.5 Test data for Staddle Channel_Antenna 1	144
9.5.6 Test data for Staddle Channel_Multiple Transmit	144
9.6 TEST DATA FOR 802.11N_HT40 RLAN MODE	145
9.6.1 Test data for Antenna 0	145
9.6.2 Test data for Antenna 1	145
9.6.3 Test data for Multiple Transmit	146
9.6.4 Test data for Staddle Channel_Antenna 0	147
9.6.5 Test data for Staddle Channel_Antenna 1	147
9.6.6 Test data for Staddle Channel_Multiple Transmit	147
9.7 TEST DATA FOR 802.11AC_HT80 RLAN MODE.....	148
9.7.1 Test data for Antenna 0	148
9.7.2 Test data for Antenna 1	148
9.7.3 Test data for Multiple Transmit	148
9.7.4 Test data for Staddle Channel_Antenna 0	149
9.7.5 Test data for Staddle Channel_Antenna 1	149
9.7.6 Test data for Staddle Channel_Multiple Transmit	149
10. PEAK POWER SPECTRUL DENSITY	150
10.1 OPERATING ENVIRONMENT	150
10.2 TEST SET-UP	150
10.3 TEST DATE	150
10.4 TEST DATA FOR 802.11A RLAN MODE.....	151

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

10.4.1 Test data for Antenna 0	151
10.4.2 Test data for Antenna 1	160
10.4.3 Test data for Multiple Transmit	169
10.4.4 Test data for Staddle Channel_Antenna 0	170
10.4.5 Test data for Staddle Channel_Antenna 1	172
10.4.6 Test data for Staddle Channel_Multiple Transmit	174
10.5 TEST DATA FOR 802.11N_HT20 RLAN MODE	175
10.5.1 Test data for Antenna 0	175
10.5.2 Test data for Antenna 1	184
10.5.3 Test data for Multiple Transmit	193
10.5.4 Test data for Staddle Channel_Antenna 0	194
10.5.5 Test data for Staddle Channel_Antenna 1	196
10.5.6 Test data for Staddle Channel_Multiple Transmit	198
10.6 TEST DATA FOR 802.11N_HT40 RLAN MODE	199
10.6.1 Test data for Antenna 0	199
10.6.2 Test data for Antenna 1	205
10.6.3 Test data for Multiple Transmit	211
10.6.4 Test data for Staddle Channel_Antenna 0	212
10.6.5 Test data for Staddle Channel_Antenna 1	214
10.6.6 Test data for Staddle Channel_Multiple Transmit	216
10.7 TEST DATA FOR 802.11AC_HT80 RLAN MODE	217
10.7.1 Test data for Antenna 0	217
10.7.2 Test data for Antenna 1	220
10.7.3 Test data for Multiple Transmit	223
10.7.4 Test data for Staddle Channel_Antenna 0	224
10.7.5 Test data for Staddle Channel_Antenna 1	226
10.7.6 Test data for Staddle Channel_Multiple Transmit	228
11. FREQUENCY STABILITY WITH TEMPERATURE VARIATION	229
11.1 OPERATING ENVIRONMENT	229
11.2 TEST SET-UP	229
11.3 TEST DATE	229
11.4 TEST DATA FOR U-NII-1	230
11.5 TEST DATA FOR U-NII-2A	231
11.6 TEST DATA FOR U-NII-2C	232
11.7 TEST DATA FOR U-NII-3	233
12. FREQUENCY STABILITY WITH VOLTAGE VARIATION	234
12.1 OPERATING ENVIRONMENT	234

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

12.2 TEST SET-UP	234
12.3 TEST DATE	234
12.4 TEST DATA FOR U-NII-1	235
12.5 TEST DATA FOR U-NII-2A.....	235
12.6 TEST DATA FOR U-NII-2C.....	236
12.7 TEST DATA FOR U-NII-3	236
13. RADIATED SPURIOUS EMISSIONS.....	237
13.1 OPERATING ENVIRONMENT	237
13.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	237
13.3 TEST DATE	237
13.4 TEST DATA FOR BELOW 30 MHz	238
13.5 TEST DATA FOR 30 MHz ~ 1 000 MHz	239
13.5.1 Test data for WLAN 5 GHz	239
13.5.2 Test data for Intermodulation Mode(Bluetooth LE + WLAN 2.4 GHz + WLAN 5 GHz)	240
13.5.3 Test data for Intermodulation Mode(Bluetooth + WLAN 2.4 GHz + WLAN 5 GHz)	241
13.6 Test data for Above 1 GHz.....	242
13.6.1 Test data for Frequency UNII I	242
13.6.2 Test data for Frequency UNII 2A	246
13.6.3 Test data for Frequency UNII 2C	250
13.6.4 Test data for Frequency UNII 3.....	254
14. RADIATED RESTRICTED BAND EDGE MEASUREMENTS.....	258
14.1 OPERATING ENVIRONMENT	258
14.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	258
14.3 TEST DATE	258
14.4 TEST DATA FOR FREQUENCY UNII I.....	259
14.4.1 Test data for 802.11a RLAN Mode	259
14.4.2 Test data for 802.11n_HT20 RLAN Mode.....	259
14.4.3 Test data for 802.11n_HT40 RLAN Mode.....	260
14.4.4 Test data for 802.11ac_HT80 RLAN Mode	260
14.5 TEST DATA FOR FREQUENCY UNII 2A.....	261
14.5.1 Test data for 802.11a RLAN Mode	261
14.5.2 Test data for 802.11n_HT20 RLAN Mode.....	261
14.5.3 Test data for 802.11n_HT40 RLAN Mode.....	262
14.5.4 Test data for 802.11ac_HT80 RLAN Mode	262
14.6 TEST DATA FOR FREQUENCY UNII 2C.....	263
14.6.1 Test data for 802.11a RLAN Mode	263
14.6.2 Test data for 802.11n_HT20 RLAN Mode.....	263

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

14.6.3 Test data for 802.11n_HT40 RLAN Mode.....	264
14.6.4 Test data for 802.11ac_HT80 RLAN Mode	264
14.7 TEST DATA FOR FREQUENCY U-NII-3.....	265
14.7.1 Test data for 802.11a RLAN Mode	265
14.7.2 Test data for 802.11n_HT20 RLAN Mode.....	267
14.7.3 Test data for 802.11n_HT40 RLAN Mode.....	269
14.7.4 Test data for 802.11ac_HT80 RLAN Mode	271
14.7.5 U-NII-3 Emission Limits	272
15. CONDUCTED EMISSION TEST	273
15.1 OPERATING ENVIRONMENT	273
15.2 TEST SET-UP	273
15.3 TEST DATE	273
15.4 TEST DATA FOR WLAN 5 GHz	274
15.5 TEST DATA FOR INTERMODULATION MODE(BLUETOOTH LE + WLAN 2.4 GHz + WLAN 5 GHz)	276
15.6 TEST DATA FOR INTERMODULATION MODE(BLUETOOTH + WLAN 2.4 GHz + WLAN 5 GHz)	278
16. DYNAMIC FREQUENCY SELECTION (DFS)	280
16.1 OPERATING ENVIRONMENT	280
16.2 TEST SET-UPS	280
16.3 DFS TEST SIGNALS	282
16.4 TECHNICAL REQUIREMENT SPECIFICATION	283
16.5 TEST DATE	283
16.6 TEST DATA.....	284
16.6.1 UNII 2A.....	284
16.6.2 UNII 3	287
17. LIST OF TEST EQUIPMENT	290

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-215-RWD-101	May 28, 2021	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : Samsung Electronics Co Ltd
 Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey, 07058, United States
 Contact Person : Jenni Chun / General Manager
 Telephone No. : 973-808-6375
 FCC ID : A3LWCA736M
 Model Name : WCA736M
 Brand Name : 
 Serial Number : N/A
 Date : May 28, 2021

EQUIPMENT CLASS	Unlicensed National Information infrastructure(UNII)
E.U.T. DESCRIPTION	Modular Transmitter, Wi-Fi/BT Transceiver
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART E Section 15.407 789033 D02 General UNII Test Procedures New Rules v02r01
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.407(a)	26 dB Bandwidth	PASS
15.407(a)	Maximum Conducted Output Power	Met the Limit / PASS
15.407(a)	Peak Power Spectral Density	Met the Limit / PASS
15.407(e)	6 dB Bandwidth	Met the Limit / PASS
15.407(g)	Frequency Stability	Met the Limit / PASS
15.407(b)	Undesirable Emissions	Met the Limit / PASS
15.205, 15.407(b)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Met the Limit / PASS
15.207	AC Conducted Emissions 150 kHz-30 MHz	Met the Limit / PASS
15.407(h)	Dynamic frequency Selection	Met the Limit / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART E Section 15.407

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

3. GENERAL INFORMATION

3.1 Product Description

The Samsung Electronics Co Ltd, Model WCA736M (referred to as the EUT in this report) is a Wi-Fi/BT Transceiver. The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Wi-Fi/BT Transceiver	
Temperature Range	-20 °C ~ 50 °C	
OPERATING FREQUENCY	Bluetooth LE	2 402 MHz ~ 2 480 MHz
	Bluetooth	2 402 MHz ~ 2 480 MHz
	WLAN 2.4 GHz	2 412 MHz ~ 2 472 MHz (802.11b/g/n(HT20))
		2 422 MHz ~ 2 462 MHz (802.11n(HT40))
	5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz (802.11a/n(HT20)/ac(VHT20))
		5 190 MHz ~ 5 230 MHz (802.11n(HT40)/ac(VHT40))
		5 210 MHz (802.11ac(VHT80))
	5 250 MHz ~ 5 350 MHz Band	5 260 MHz ~ 5 320 MHz (802.11a/n(HT20)/ac(VHT20))
		5 270 MHz ~ 5 310 MHz (802.11n(HT40)/ac(VHT40))
		5 290 MHz (802.11ac(VHT80))
	5 470 MHz ~ 5 725 MHz Band	5 500 MHz ~ 5 720 MHz (802.11a/n(HT20)/ac(VHT20))
		5 510 MHz ~ 5 710 MHz (802.11n(HT40)/ac(VHT40))
		5 530 MHz ~ 5 690 MHz (802.11ac(VHT80))
	5 725 MHz ~ 5 850 MHz Band	5 745 MHz ~ 5 825 MHz (802.11a/n(HT20)/ac(VHT20))
		5 755 MHz ~ 5 795 MHz (802.11n(HT40)/ac(VHT40))
		5 775 MHz (802.11ac(VHT80))
MODULATION TYPE	Bluetooth LE	GFSK for 1 Mbps / 2 Mbps
	Bluetooth	GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8-DPSK for 3Mbps
	WLAN 2.4 GHz	802.11b: DSSS Modulation(DBPSK/DQPSK/CCK) 802.11g/n(HT20)/n(HT40): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)
	WLAN 5 GHz	802.11a/n(HT20)/n(HT40)/ac(VHT80): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

RF OUTPUT POWER	Bluetooth LE	1 Mbps	7.65 dBm
		2 Mbps	7.66 dBm
	Bluetooth	1 Mbps	11.69 dBm
		2 Mbps	10.64 dBm
		3 Mbps	10.71 dBm
	WLAN 2.4 GHz	Antenna 0	14.28 dBm(802.11b) 11.84 dBm(802.11g) 12.58 dBm(802.11n_HT20) 9.23 dBm(802.11n_HT40)
		Antenna 1	16.31 dBm(802.11b) 12.87 dBm(802.11g) 13.65 dBm(802.11n_HT20) 10.16 dBm(802.11n_HT40)
		Multiple Antenna	15.40 dBm(802.11g) 16.16 dBm(802.11n_HT20) 12.73 dBm(802.11n_HT40)

RF OUTPUT POWER	5 150 MHz ~ 5 250 MHz Band	Antenna 0	9.22 dBm(802.11a) 9.46 dBm(802.11n_HT20) 10.54 dBm(802.11n_HT40) 10.61 dBm(802.11ac_VHT80)
		Antenna 1	10.08 dBm(802.11a) 9.98 dBm(802.11n_HT20) 10.68 dBm(802.11n_HT40) 10.68 dBm(802.11ac_VHT80)
		Multiple Antenna	12.68 dBm(802.11a) 12.74 dBm(802.11n_HT20) 13.62 dBm(802.11n_HT40) 13.66 dBm(802.11ac_VHT80)
	5 250 MHz ~ 5 350 MHz Band	Antenna 0	13.79 dBm(802.11a) 14.24 dBm(802.11n_HT20) 12.55 dBm(802.11n_HT40) 13.25 dBm(802.11ac_VHT80)
		Antenna 1	14.95 dBm(802.11a) 14.74 dBm(802.11n_HT20) 13.16 dBm(802.11n_HT40) 13.58 dBm(802.11ac_VHT80)
		Multiple Antenna	17.37 dBm(802.11a) 17.49 dBm(802.11n_HT20) 15.83 dBm(802.11n_HT40) 16.43 dBm(802.11ac_VHT80)

RF OUTPUT POWER	5 470 MHz ~ 5 725 MHz Band	Antenna 0	13.65 dBm(802.11a) 13.31 dBm(802.11n_HT20) 13.37 dBm(802.11n_HT40) 12.65 dBm(802.11ac_VHT80)
		Antenna 0_Straddle	12.73 dBm(802.11a) 11.37 dBm(802.11n_HT20) 11.84 dBm(802.11n_HT40) 11.63 dBm(802.11ac_VHT80)
		Antenna 1	14.69 dBm(802.11a) 14.56 dBm(802.11n_HT20) 14.42 dBm(802.11n_HT40) 14.06 dBm(802.11ac_VHT80)
		Antenna 1_Straddle	11.81 dBm(802.11a) 12.13 dBm(802.11n_HT20) 11.13 dBm(802.11n_HT40) 11.29 dBm(802.11ac_VHT80)
		Multiple Antenna	17.21 dBm(802.11a) 16.99 dBm(802.11n_HT20) 16.94 dBm(802.11n_HT40) 16.42 dBm(802.11ac_VHT80)
		Multiple Antenna _Straddle	15.30 dBm(802.11a) 14.78 dBm(802.11n_HT20) 14.51 dBm(802.11n_HT40) 14.47 dBm(802.11ac_VHT80)

RF OUTPUT POWER	5 725 MHz ~ 5 850 MHz Band	Antenna 0	14.43 dBm(802.11a) 14.48 dBm(802.11n_HT20) 13.14 dBm(802.11n_HT40) 13.26 dBm(802.11ac_VHT80)
		Antenna 0_Straddle	5.02 dBm(802.11a) 4.10 dBm(802.11n_HT20) -0.02 dBm(802.11n_HT40) -3.02 dBm(802.11ac_VHT80)
		Antenna 1	15.15 dBm(802.11a) 15.28 dBm(802.11n_HT20) 14.15 dBm(802.11n_HT40) 14.21 dBm(802.11ac_VHT80)
		Antenna 1_Straddle	3.98 dBm(802.11a) 4.88 dBm(802.11n_HT20) -0.67 dBm(802.11n_HT40) -3.30 dBm(802.11ac_VHT80)
		Multiple Antenna	17.75 dBm(802.11a) 17.91 dBm(802.11n_HT20) 16.68 dBm(802.11n_HT40) 16.77 dBm(802.11ac_VHT80)
		Multiple Antenna _Straddle	7.54 dBm(802.11a) 7.52 dBm(802.11n_HT20) 2.68 dBm(802.11n_HT40) -0.15 dBm(802.11ac_VHT80)

ANTENNA TYPE	PCB Antenna		
ANTENNA GAIN	Bluetooth LE	1.81 dBi	
	Bluetooth	1.81 dBi	
	WLAN 2.4 GHz	Antenna 0	-1.04 dBi
		Antenna 1	0.45 dBi
		Multiple Antenna	2.78 dBi
	5 150 MHz ~ 5 250 MHz Band	Antenna 0	3.95 dBi
		Antenna 1	2.07 dBi
		Multiple Antenna	6.12 dBi
	5 250 MHz ~ 5 350 MHz Band	Antenna 0	4.91 dBi
		Antenna 1	2.44 dBi
		Multiple Antenna	6.86 dBi
	5 470 MHz ~ 5 725 MHz Band	Antenna 0	6.18 dBi
		Antenna 1	2.23 dBi
		Multiple Antenna	7.65 dBi
	5 725 MHz ~ 5 850 MHz Band	Antenna 0	5.27 dBi
		Antenna 1	2.77 dBi
		Multiple Antenna	7.21 dBi
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)		40 MHz	

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	Samsung Electronics Co Ltd	HDWB-2106SA V1.2	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
WCA736M	Samsung Electronics Co Ltd	Wi-Fi/BT Transceiver (EUT)	-
HP Probook	HP	Notebook PC	EUT
PPP009L-E	LIE-ON TECHNOLOGY (CHANGZHOU)CO.,LTD.	AC Adapter	-

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting mode is programmed.

-. Frequency / Channel Operations

		Channel	Frequency
802.11a 802.11n 802.11ac(20 MHz)	Band 1	36	5 180
		44	5 220
		48	5 240
	Band 2A	52	5 260
		60	5 300
		64	5 320
	Band 2C	100	5 500
		116	5 580
		140	5 700
	Straddle	144	5 720
	Band 3	149	5 745
		157	5 785
		165	5 825
802.11n 802.11ac(40 MHz)	Band 1	38	5 190
		46	5 230
	Band 2A	54	5 270
		62	5 310
	Band 2C	102	5 510
		110	5 550
		134	5 670
	Straddle	142	5 710
	Band 3	151	5 755
		5 795	5 795
802.11ac(80 MHz)	Band 1	42	5 210
	Band 2A	58	5 290
	Band 2C	106	5 530
	Straddle	138	5 690
	Band 3	155	5 775

UNII 1

Modulation	DATA RATE	OUTPUT POWER[dBm]	
		Antenna 0	Antenna 1
802.11 a (Middle Channel)	6 Mbps	8.77	9.32
	9 Mbps	8.76	9.28
	12 Mbps	8.75	9.26
	18 Mbps	8.74	9.26
	24 Mbps	8.74	9.26
	36 Mbps	7.78	8.34
	48 Mbps	6.94	7.53
	54 Mbps	5.26	6.54
HT 20 (Middle Channel)	6.5 Mbps	8.94	9.19
	13 Mbps	8.92	9.18
	19.5 Mbps	8.92	9.17
	26 Mbps	8.89	9.18
	39 Mbps	8.89	9.16
	52 Mbps	7.99	8.19
	58.5 Mbps	6.15	6.34
	65 Mbps	6.14	6.33
HT 40 (Low Channel)	13.5 Mbps	10.54	10.68
	27 Mbps	10.48	10.42
	40.5 Mbps	10.44	10.47
	54 Mbps	10.43	10.49
	81 Mbps	10.43	10.45
	108 Mbps	9.38	9.54
	121.5 Mbps	7.54	7.50
	135 Mbps	7.54	7.48

VHT80 (Middle Channel)	29.3 Mbps	10.61	10.68
	58.5 Mbps	10.51	10.57
	87.8 Mbps	10.45	10.47
	117 Mbps	10.43	10.44
	175.5 Mbps	10.43	10.43
	234 Mbps	9.39	9.48
	263.3 Mbps	9.36	9.46
	292.5 Mbps	7.55	7.42
	351 Mbps	7.48	7.36
	390 Mbps	7.46	7.35

- The worse case data rate for each modulation is determined 6 Mbps(Ant.0/Ant.1) for IEEE 802.11a, 6.5 Mbps(Ant.0/Ant.1) for HT20, 13.5 Mbps(Ant.0/Ant.1) for HT40, 29.3 Mbps(Ant.0/Ant.1) for VHT80.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is "XY" axis.

UNII 2A

Modulation	DATA RATE	OUTPUT POWER[dBm]	
		Antenna 0	Antenna 1
802.11 a (Middle Channel)	6 Mbps	13.79	14.87
	9 Mbps	13.77	14.86
	12 Mbps	13.75	14.85
	18 Mbps	13.55	14.62
	24 Mbps	13.55	14.62
	36 Mbps	12.56	13.56
	48 Mbps	11.72	12.49
	54 Mbps	10.55	11.22
HT 20 (Middle Channel)	6.5 Mbps	14.24	14.71
	13 Mbps	14.22	14.70
	19.5 Mbps	14.18	14.68
	26 Mbps	14.15	14.68
	39 Mbps	14.20	14.66
	52 Mbps	13.28	13.59
	58.5 Mbps	11.29	11.61
	65 Mbps	11.30	11.60
HT 40 (Low Channel)	13.5 Mbps	11.82	13.16
	27 Mbps	11.75	13.13
	40.5 Mbps	11.74	13.11
	54 Mbps	11.73	13.11
	81 Mbps	11.73	13.09
	108 Mbps	11.01	12.01
	121.5 Mbps	8.99	9.93
	135 Mbps	8.97	10.18

VHT80 (Middle Channel)	29.3 Mbps	13.25	13.58
	58.5 Mbps	13.23	13.52
	87.8 Mbps	13.01	13.45
	117 Mbps	12.99	13.40
	175.5 Mbps	12.98	13.36
	234 Mbps	12.09	12.55
	263.3 Mbps	12.09	12.47
	292.5 Mbps	10.15	10.42
	351 Mbps	10.03	10.34
	390 Mbps	10.01	10.34

- The worse case data rate for each modulation is determined 6 Mbps(Ant.0/Ant.1) for IEEE 802.11a, 6.5 Mbps(Ant.0/Ant.1) for HT20, 13.5 Mbps(Ant.0/Ant.1) for HT40, 29.3 Mbps(Ant.0/Ant.1) for VHT80.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is "XY" axis.

UNII 2C

Modulation	DATA RATE	OUTPUT POWER[dBm]	
		Antenna 0	Antenna 1
802.11 a (Middle Channel)	6 Mbps	13.15	14.28
	9 Mbps	13.01	14.26
	12 Mbps	12.94	14.25
	18 Mbps	12.73	14.26
	24 Mbps	12.73	14.26
	36 Mbps	11.85	13.13
	48 Mbps	10.88	12.07
	54 Mbps	9.88	11.01
HT 20 (Middle Channel)	6.5 Mbps	12.75	14.29
	13 Mbps	12.74	14.27
	19.5 Mbps	12.73	14.25
	26 Mbps	12.53	14.25
	39 Mbps	12.54	14.03
	52 Mbps	11.66	13.13
	58.5 Mbps	9.73	11.34
	65 Mbps	9.49	11.01
HT 40 (Low Channel)	13.5 Mbps	12.66	14.31
	27 Mbps	12.64	14.07
	40.5 Mbps	12.63	14.07
	54 Mbps	12.41	14.08
	81 Mbps	12.39	14.08
	108 Mbps	11.48	13.04
	121.5 Mbps	9.46	11.25
	135 Mbps	9.43	10.99

VHT80 (Middle Channel)	29.3 Mbps	12.65	14.06
	58.5 Mbps	12.63	14.05
	87.8 Mbps	12.60	13.95
	117 Mbps	12.56	13.94
	175.5 Mbps	12.55	13.92
	234 Mbps	11.75	12.88
	263.3 Mbps	11.54	12.88
	292.5 Mbps	9.59	10.87
	351 Mbps	9.53	10.81
	390 Mbps	9.52	10.61

- The worse case data rate for each modulation is determined 6 Mbps(Ant.0/Ant.1) for IEEE 802.11a, 6.5 Mbps(Ant.0/Ant.1) for HT20, 13.5 Mbps(Ant.0/Ant.1) for HT40, 29.3 Mbps(Ant.0/Ant.1) for VHT80.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is "XY" axis.

UNII 3

Modulation	DATA RATE	OUTPUT POWER[dBm]	
		Antenna 0	Antenna 1
802.11 a (Middle Channel)	6 Mbps	14.43	15.03
	9 Mbps	14.36	15.02
	12 Mbps	14.26	14.85
	18 Mbps	14.26	14.69
	24 Mbps	14.26	14.69
	36 Mbps	13.24	13.73
	48 Mbps	12.19	12.72
	54 Mbps	11.17	11.68
HT 20 (Middle Channel)	6.5 Mbps	14.48	15.28
	13 Mbps	14.43	15.23
	19.5 Mbps	14.35	15.03
	26 Mbps	14.31	15.01
	39 Mbps	14.36	14.97
	52 Mbps	13.62	14.22
	58.5 Mbps	11.51	12.26
	65 Mbps	11.52	11.96
HT 40 (Low Channel)	13.5 Mbps	13.14	14.15
	27 Mbps	13.09	13.84
	40.5 Mbps	13.06	13.81
	54 Mbps	13.05	13.81
	81 Mbps	13.05	13.80
	108 Mbps	12.08	12.86
	121.5 Mbps	10.09	10.77
	135 Mbps	9.88	10.76

VHT80 (Middle Channel)	29.3 Mbps	13.26	14.21
	58.5 Mbps	13.25	14.21
	87.8 Mbps	13.07	13.96
	117 Mbps	13.07	14.03
	175.5 Mbps	13.15	14.03
	234 Mbps	12.01	13.03
	263.3 Mbps	12.05	13.02
	292.5 Mbps	10.09	10.96
	351 Mbps	10.04	10.87
	390 Mbps	9.80	10.87

- The worse case data rate for each modulation is determined 6 Mbps(Ant.0/Ant.1) for IEEE 802.11a, 6.5 Mbps(Ant.0/Ant.1) for HT20, 13.5 Mbps(Ant.0/Ant.1) for HT40, 29.3 Mbps(Ant.0/Ant.1) for VHT80.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is "XY" axis.

- Duty Cycle

	Band	Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Antenna 0	UNII 1	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
	UNII 2A	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
	UNII 2C	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
	UNII 3	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
Antenna 1	UNII 1	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
	UNII 2A	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
	UNII 2C	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
	UNII 3	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

	Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Staddle	802.11 a	-	-	100.00	-
	802.11 HT 20	-	-	100.00	-
	802.11 HT 40	-	-	100.00	-
	802.11 VHT 80	-	-	100.00	-


Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100

Correction Factor : $10 * \log(1 / (\text{Duty Cycle} / 100))$

-. Test Plot

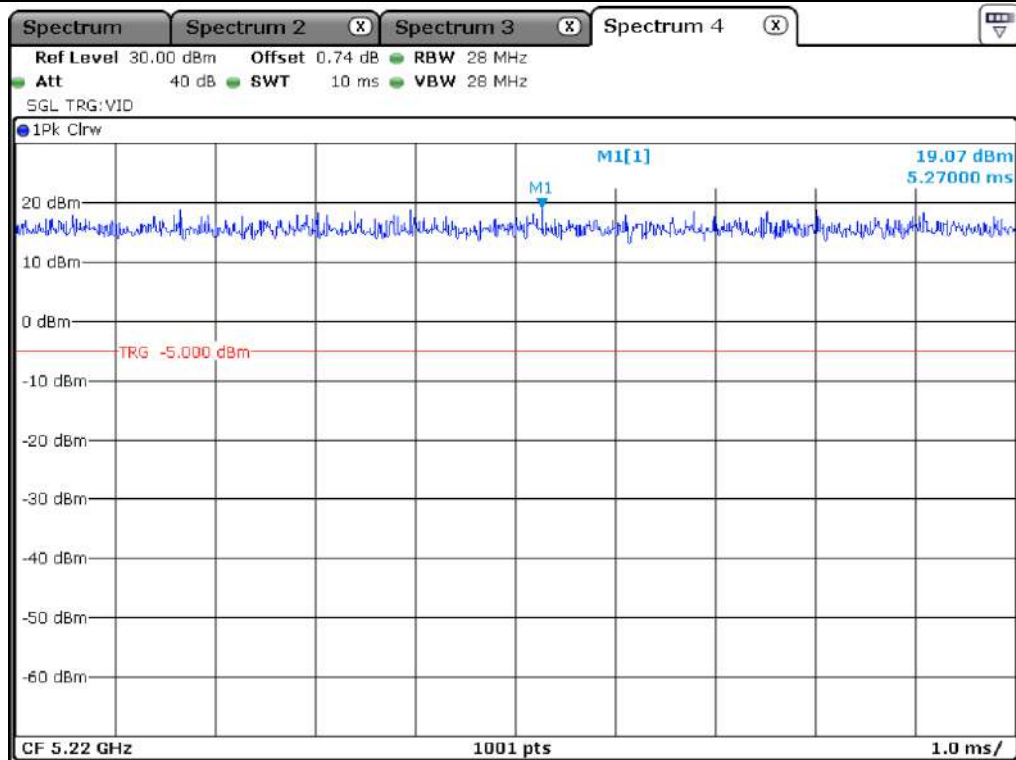

UNII 1_802.11 a_Antenna 0

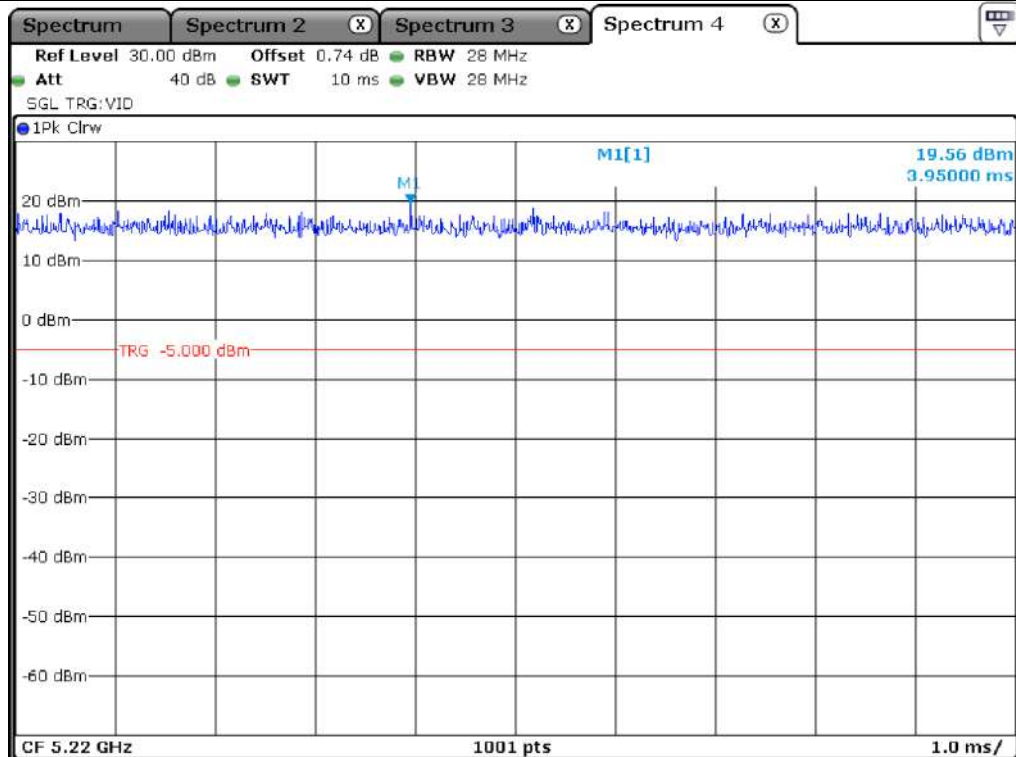


UNII 1_802.11 HT 20_Antenna 0

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

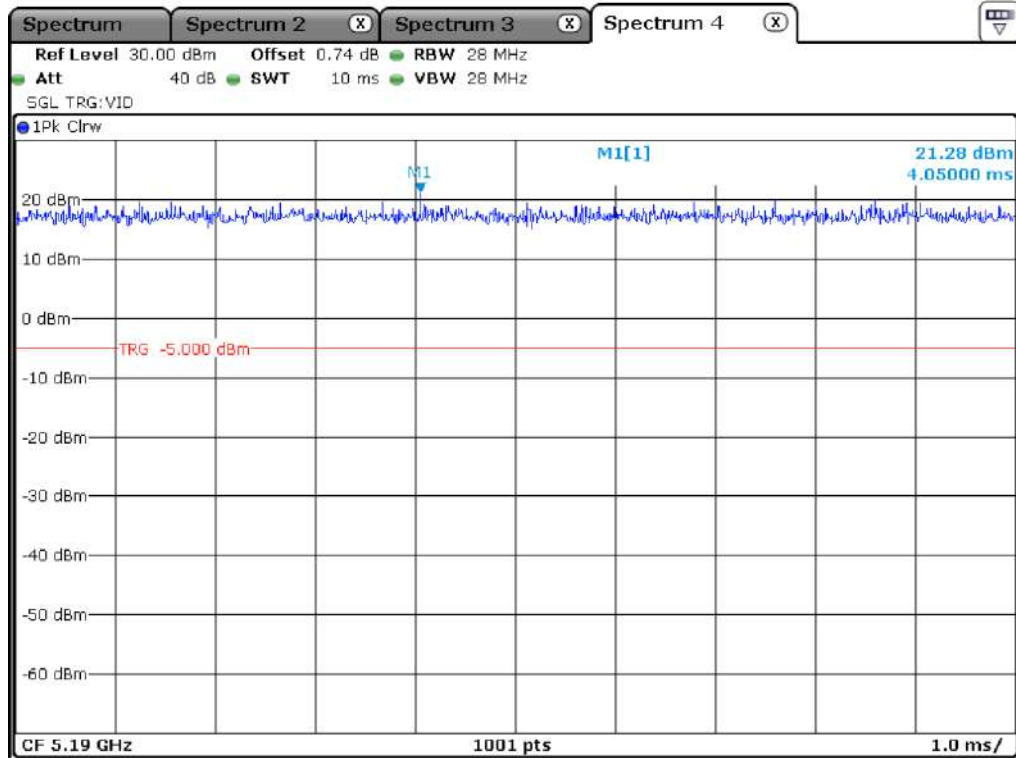

UNII 1_802.11 HT40_Antenna 0

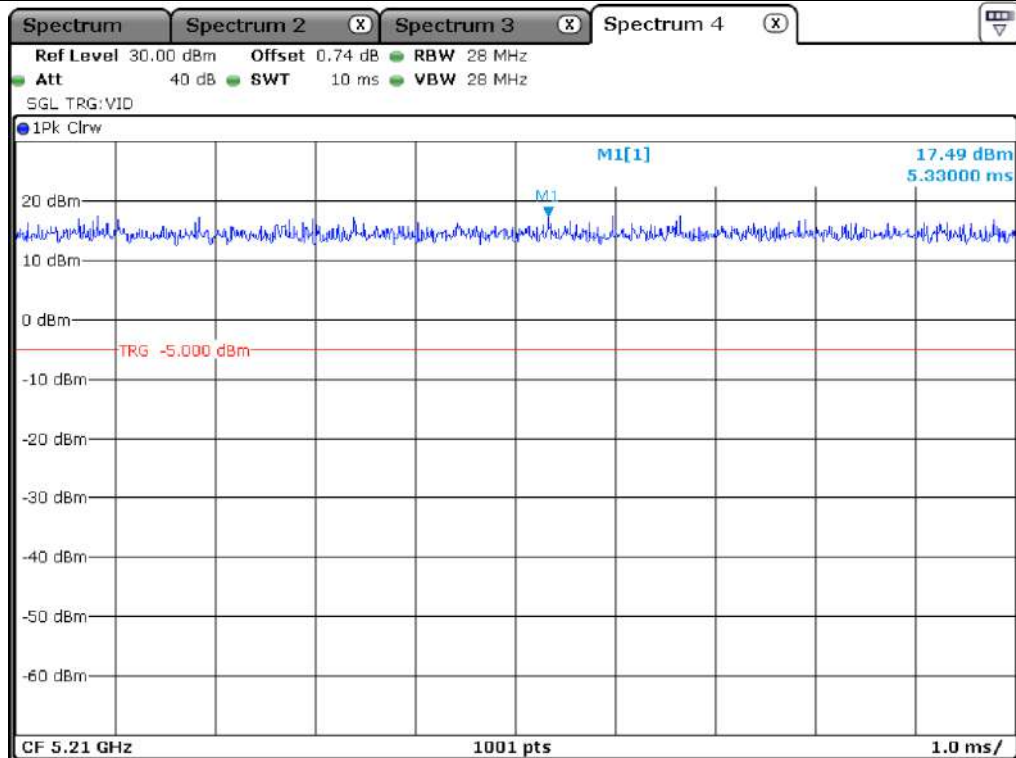


UNII 1_802.11 VHT 80_Antenna 0

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

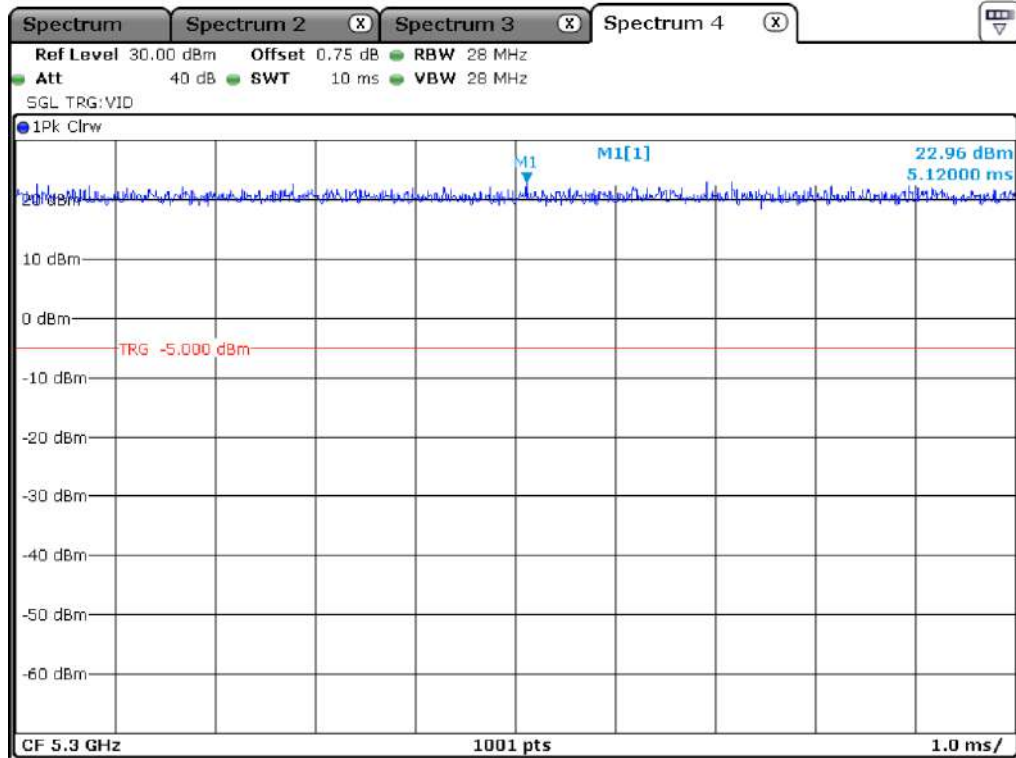


UNII 2A_802.11 a_Antenna 0

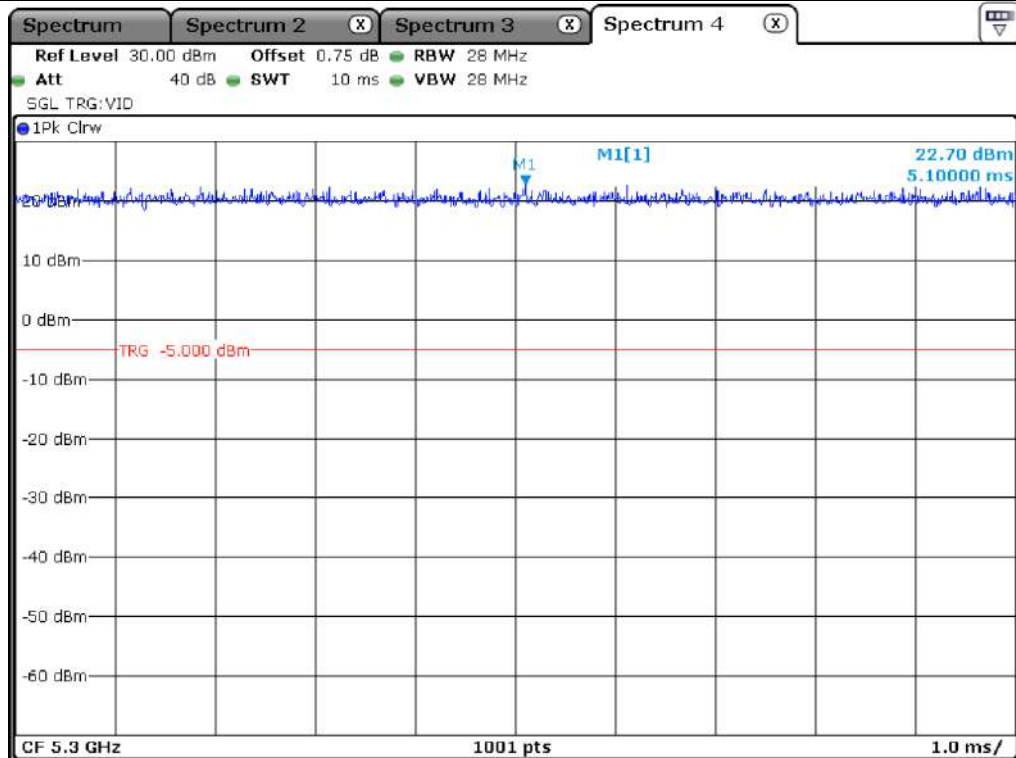

UNII 2A_802.11 HT 20_Antenna 0

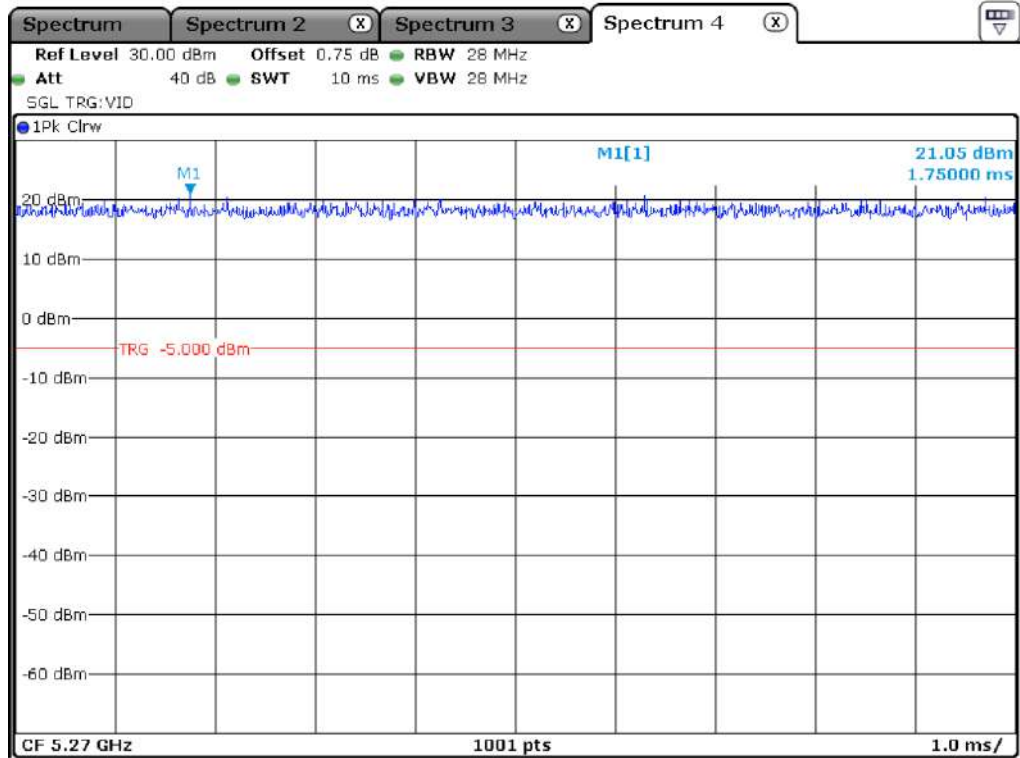

UNII 2A_802.11 HT40_Antenna 0

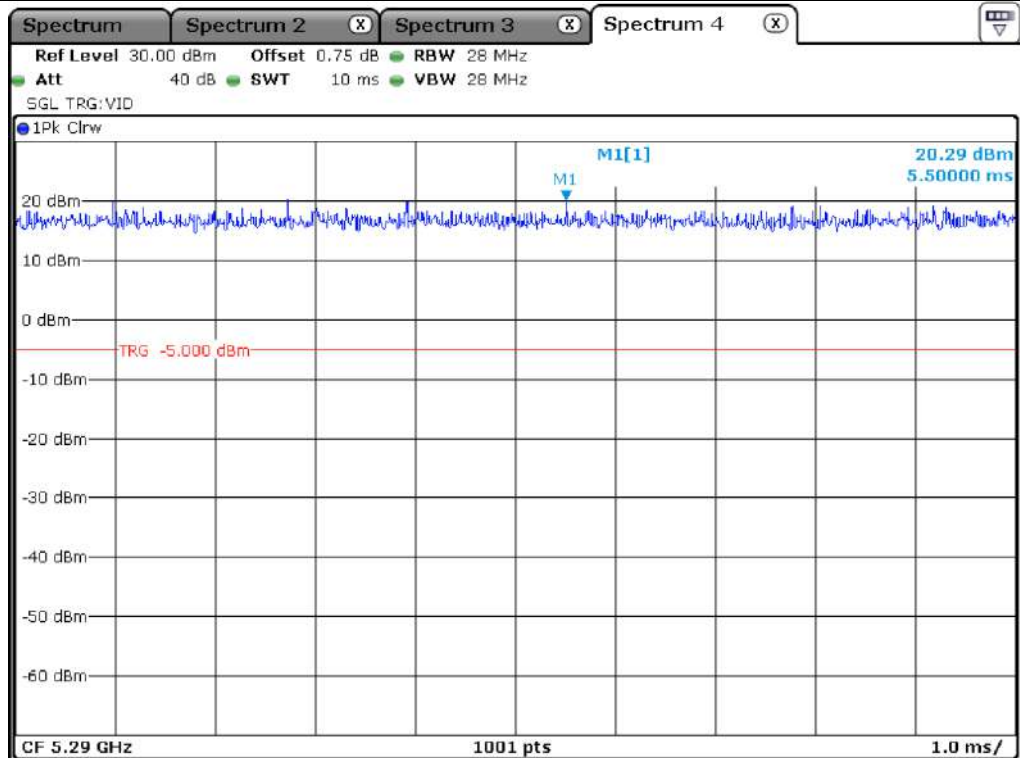


UNII 2A_802.11 VHT 80_Antenna 0

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

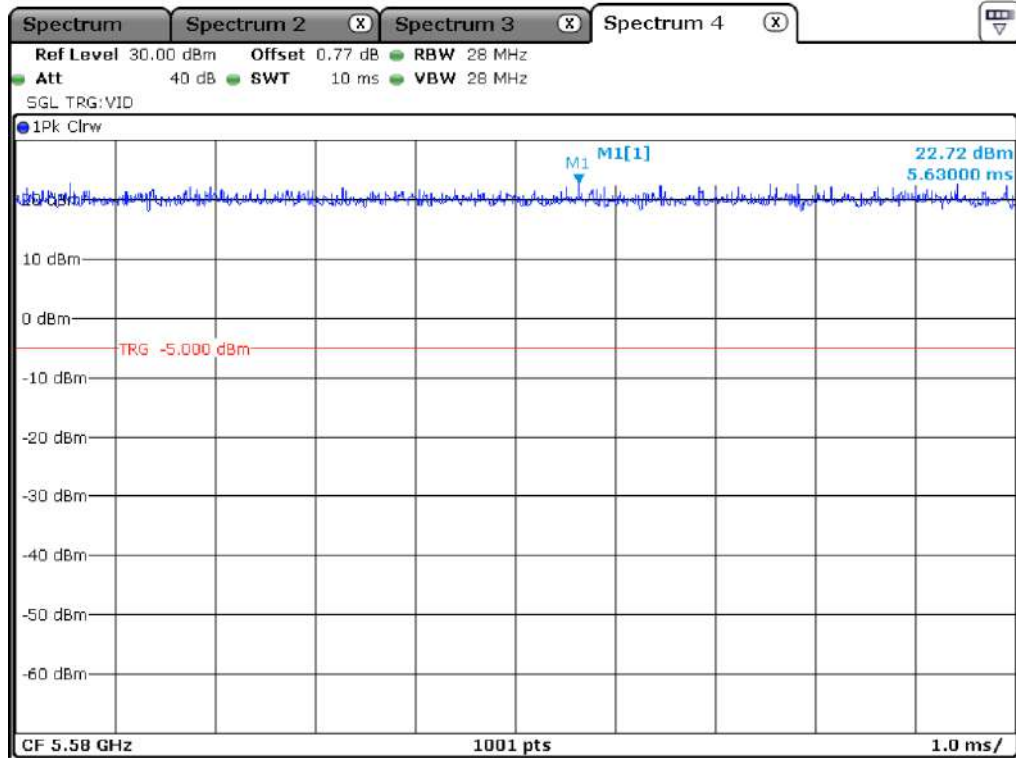

UNII 2C_802.11 a_Antenna 0

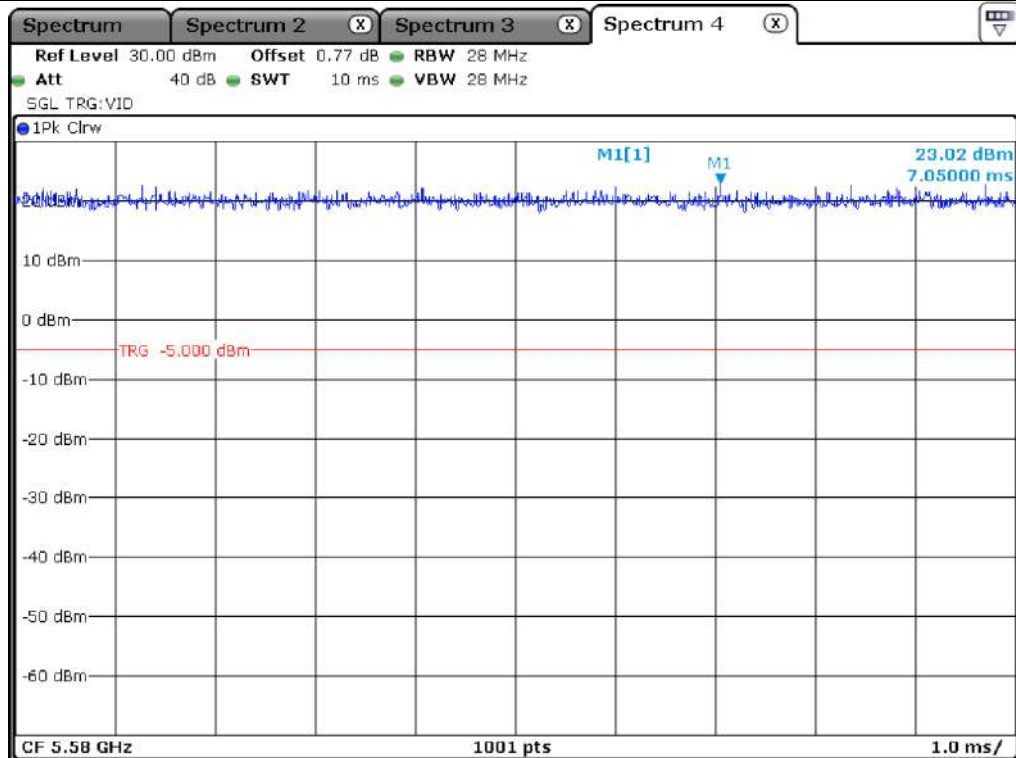


UNII 2C_802.11 HT 20_Antenna 0

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

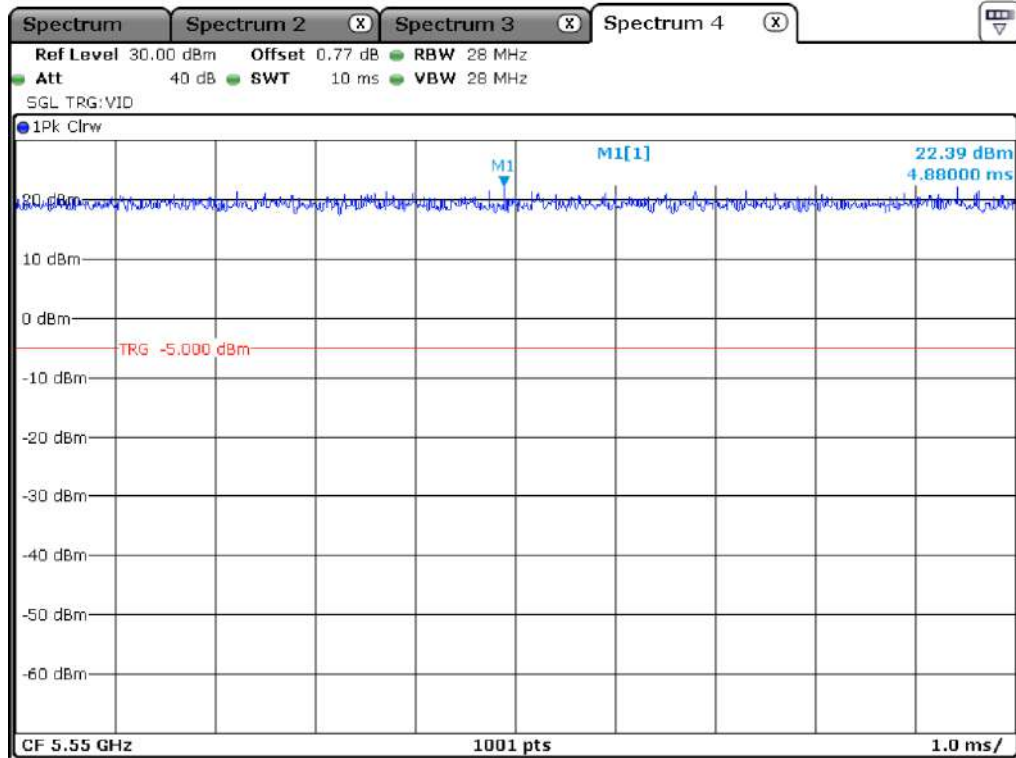

UNII 2C_802.11 HT40_Antenna 0

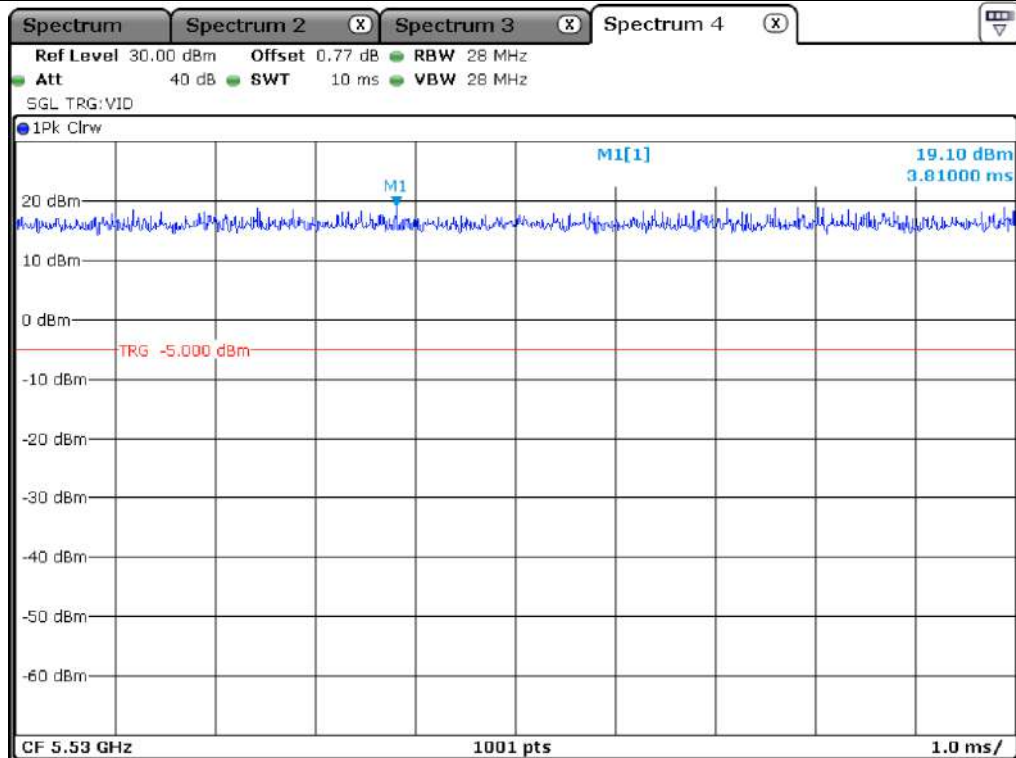


UNII 2C_802.11 VHT 80_Antenna 0

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

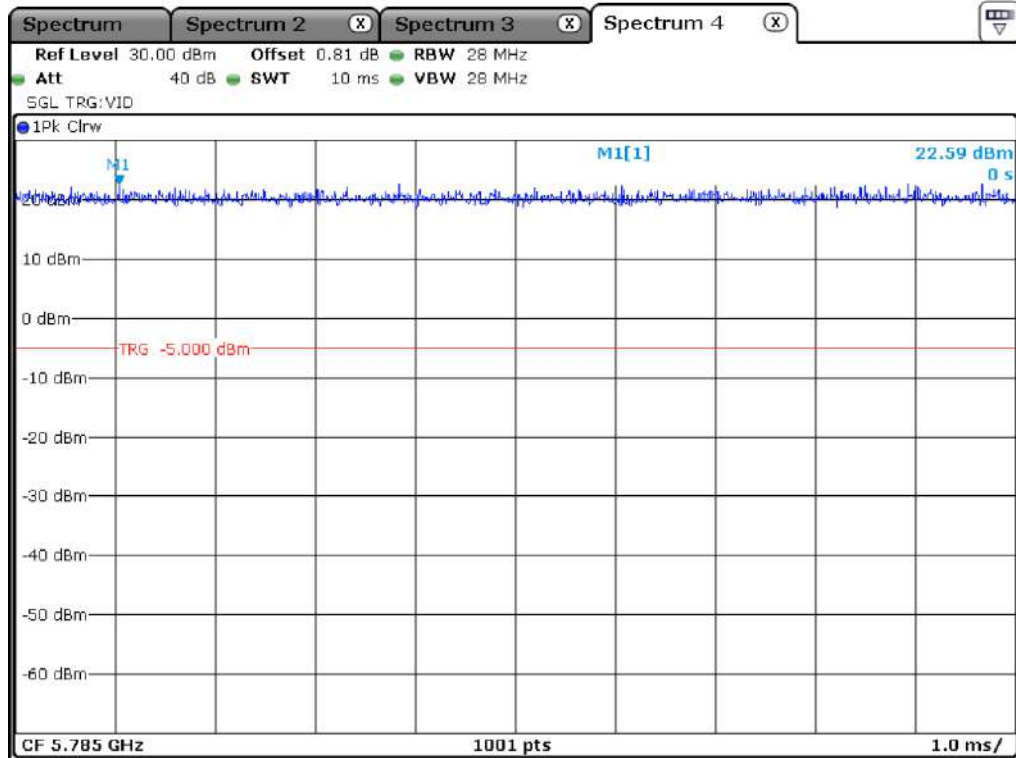

UNII_3_802.11 a_Antenna 0

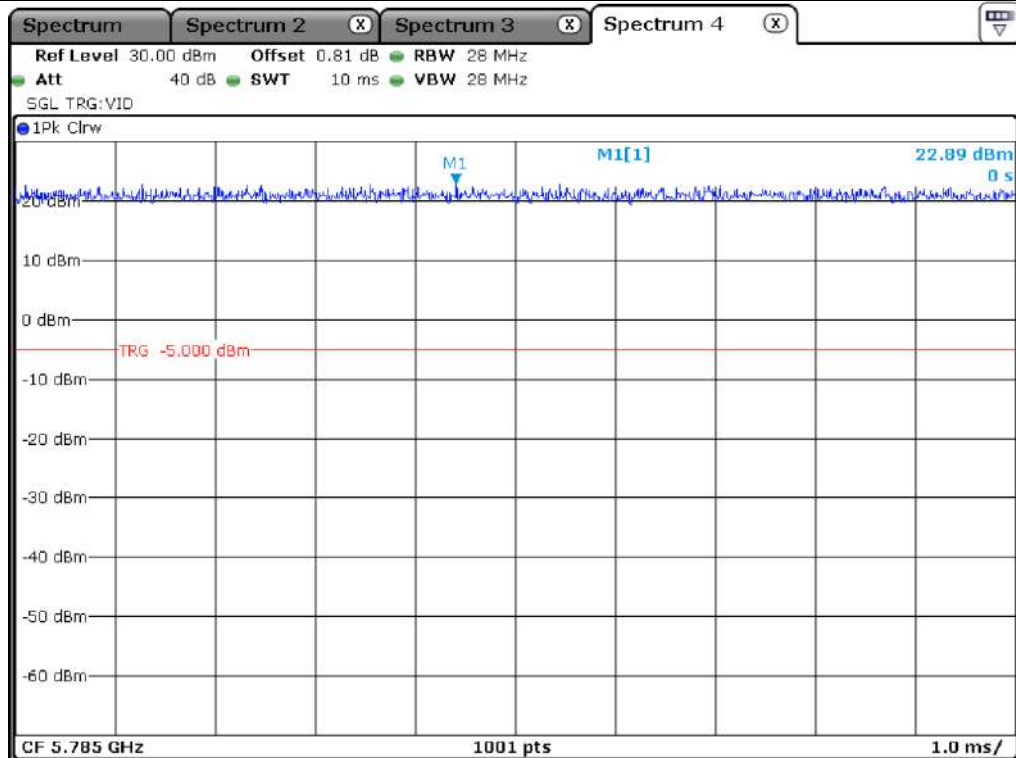


UNII_3_802.11 HT 20_Antenna 0

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

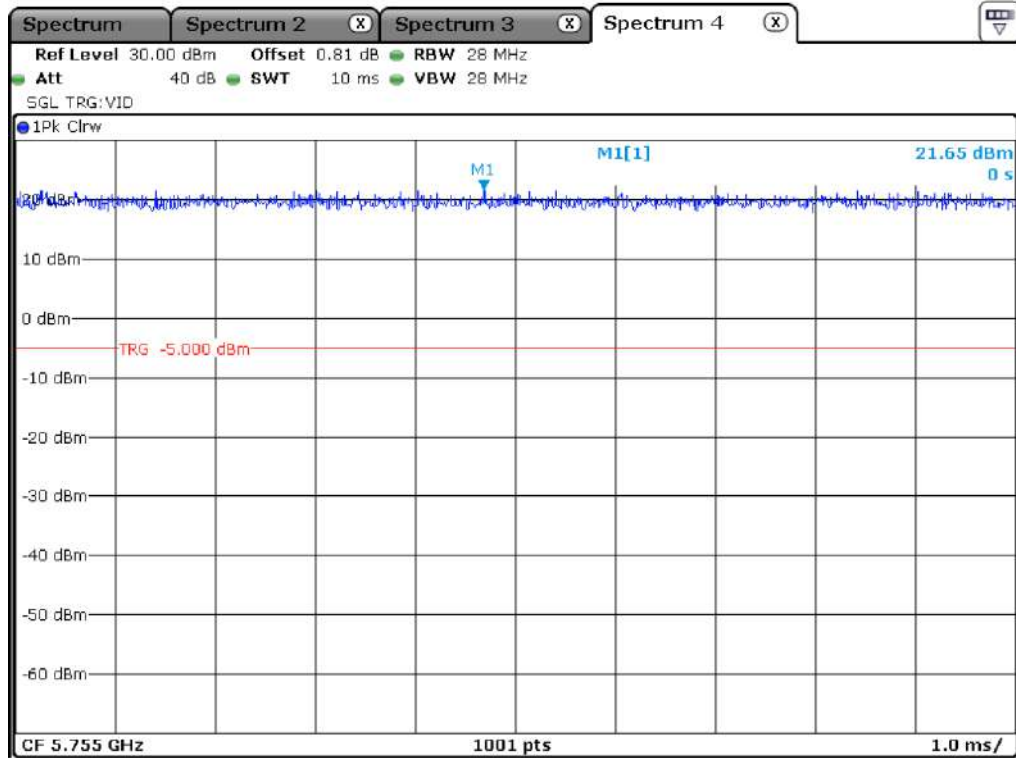

UNII 3_802.11 HT40_Antenna 0

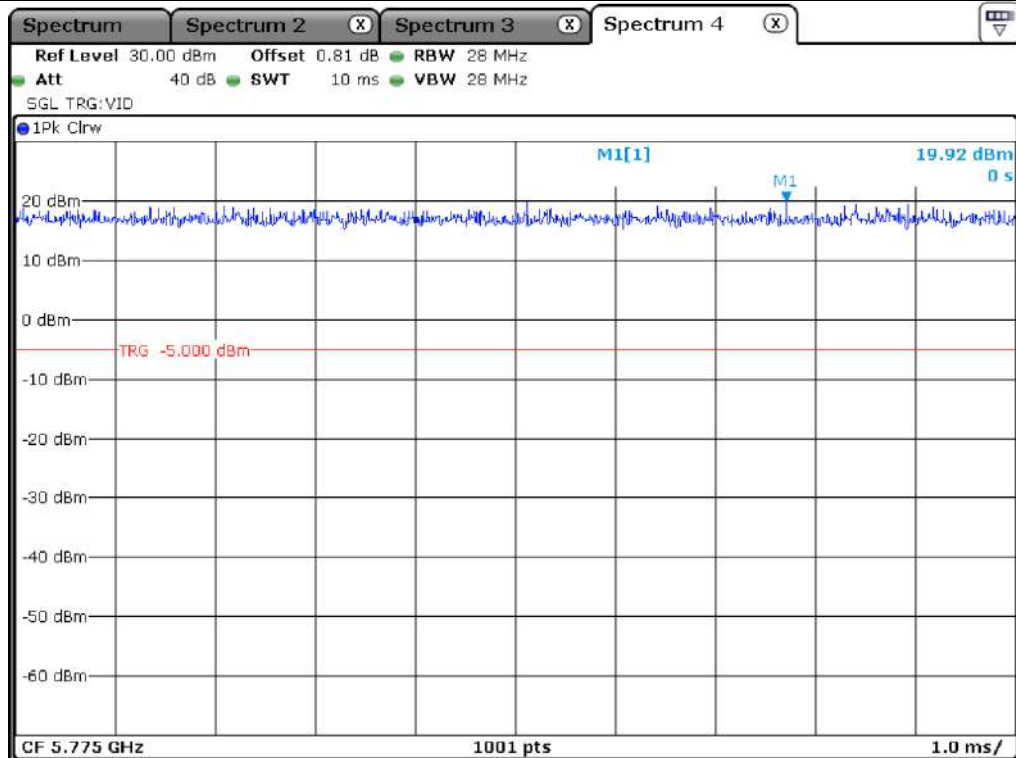


UNII 3_802.11 VHT 80_Antenna 0

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

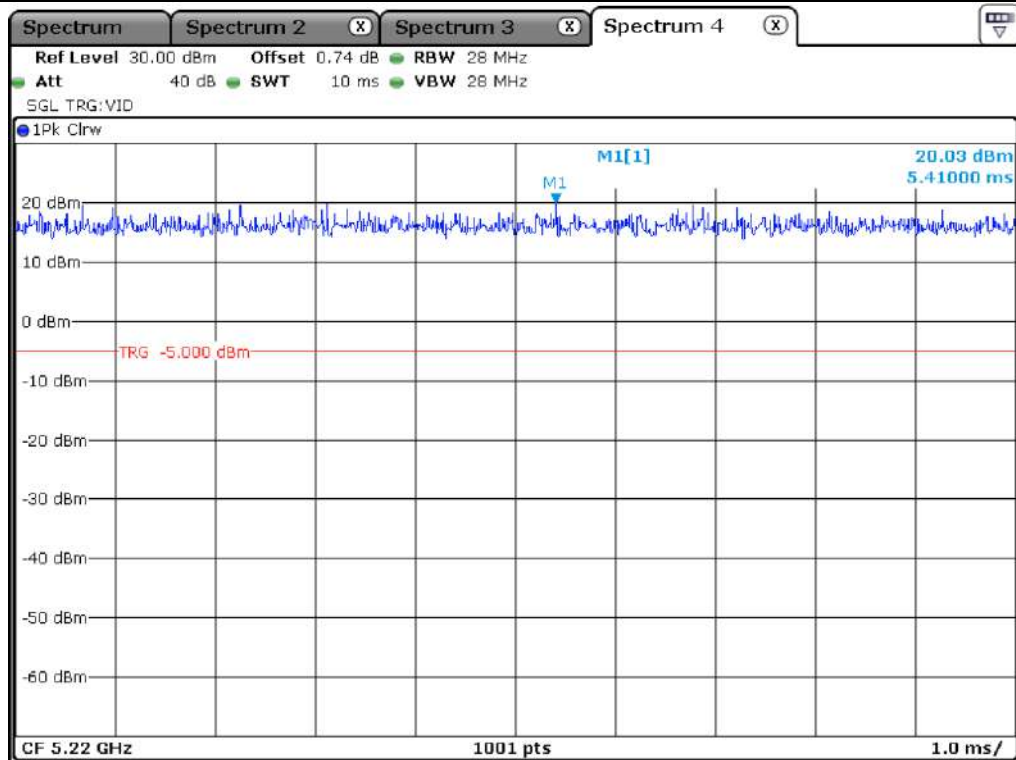


UNII 1_802.11 a_Antenna 1

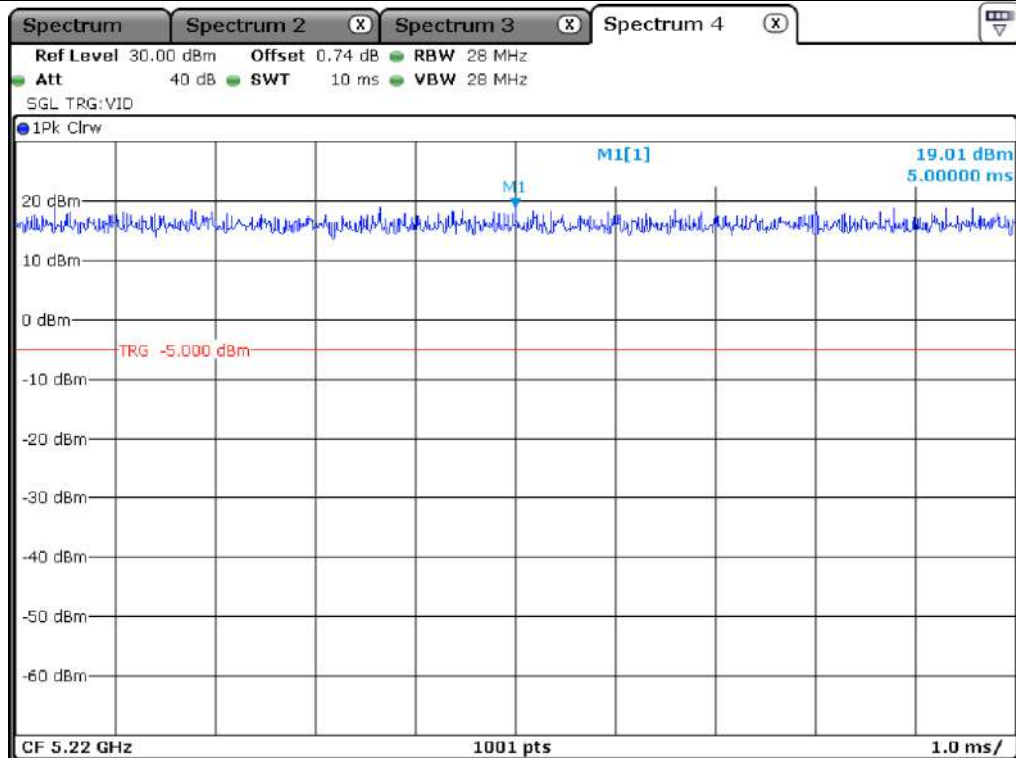


UNII 1_802.11 HT 20_Antenna 1

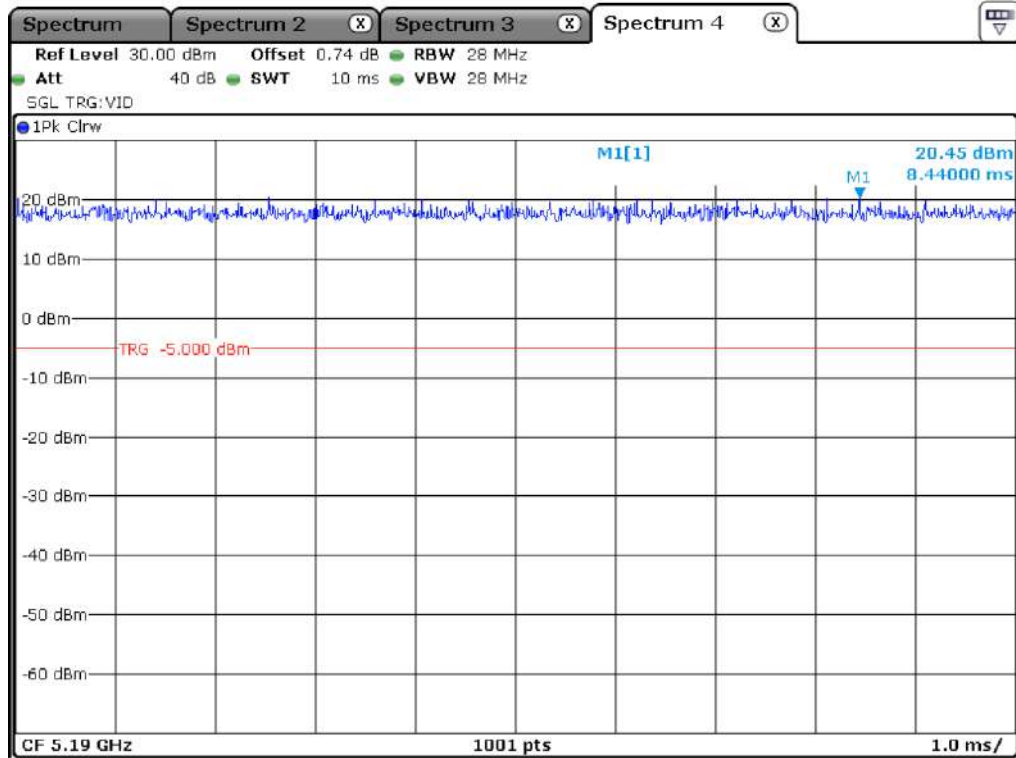


UNII 1_802.11 HT40_Antenna 1

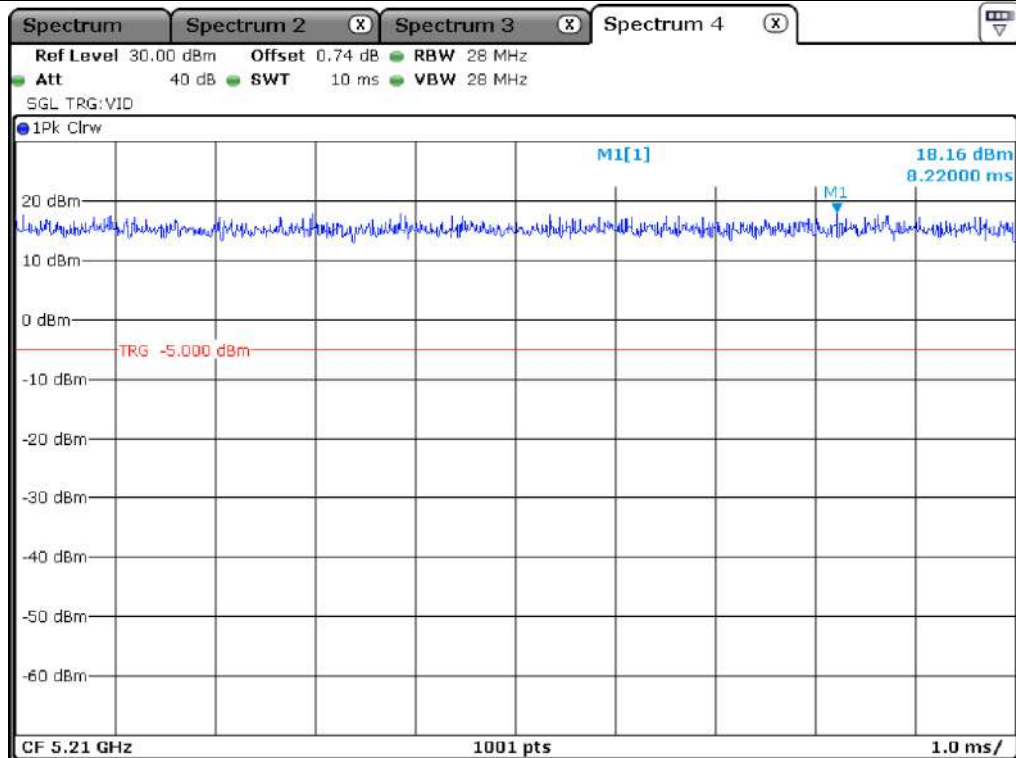


UNII 1_802.11 VHT 80_Antenna 1

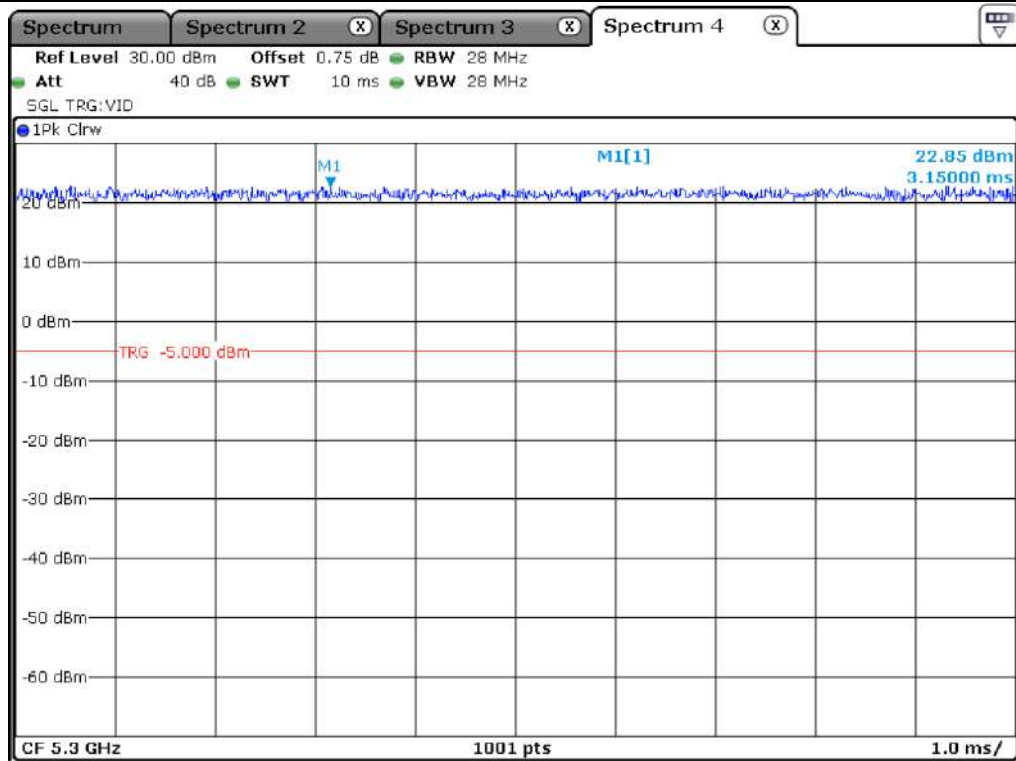


UNII 2A_802.11 a_Antenna 1

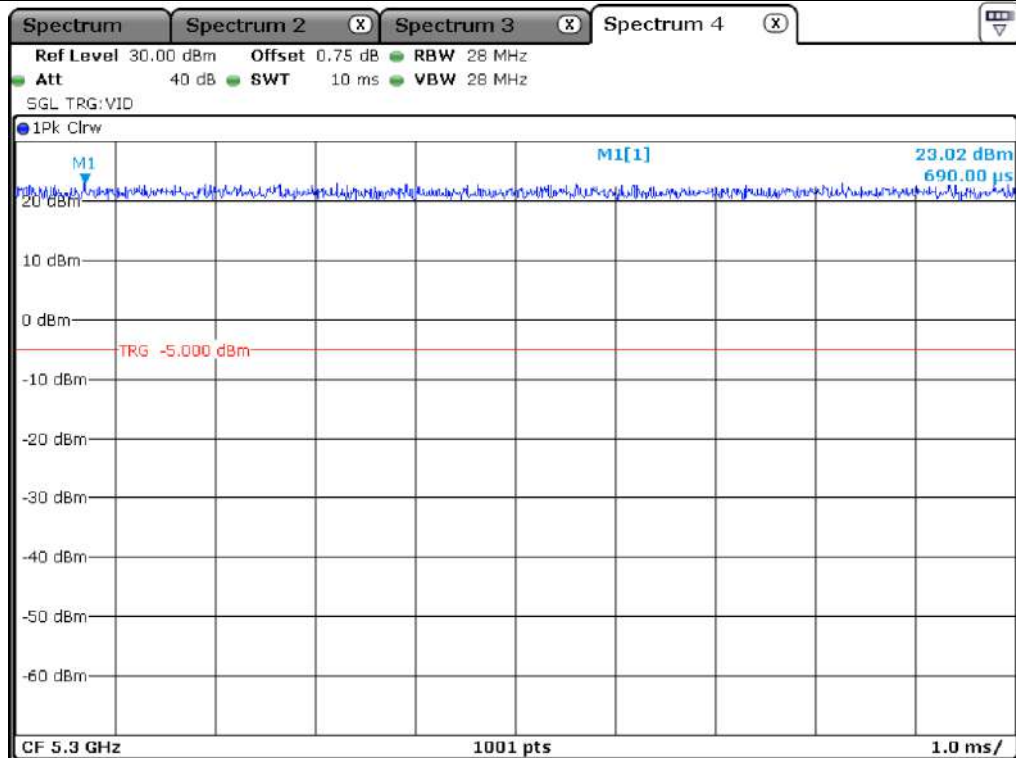


UNII 2A_802.11 HT 20_Antenna 1

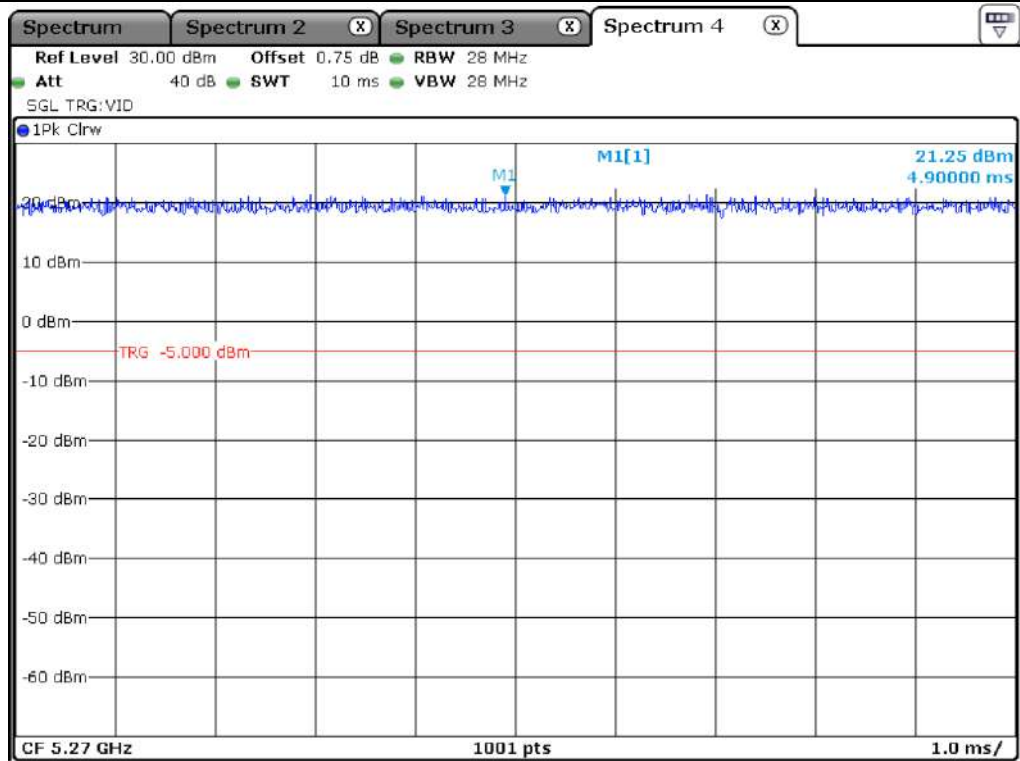


UNII 2A_802.11 HT40_Antenna 1

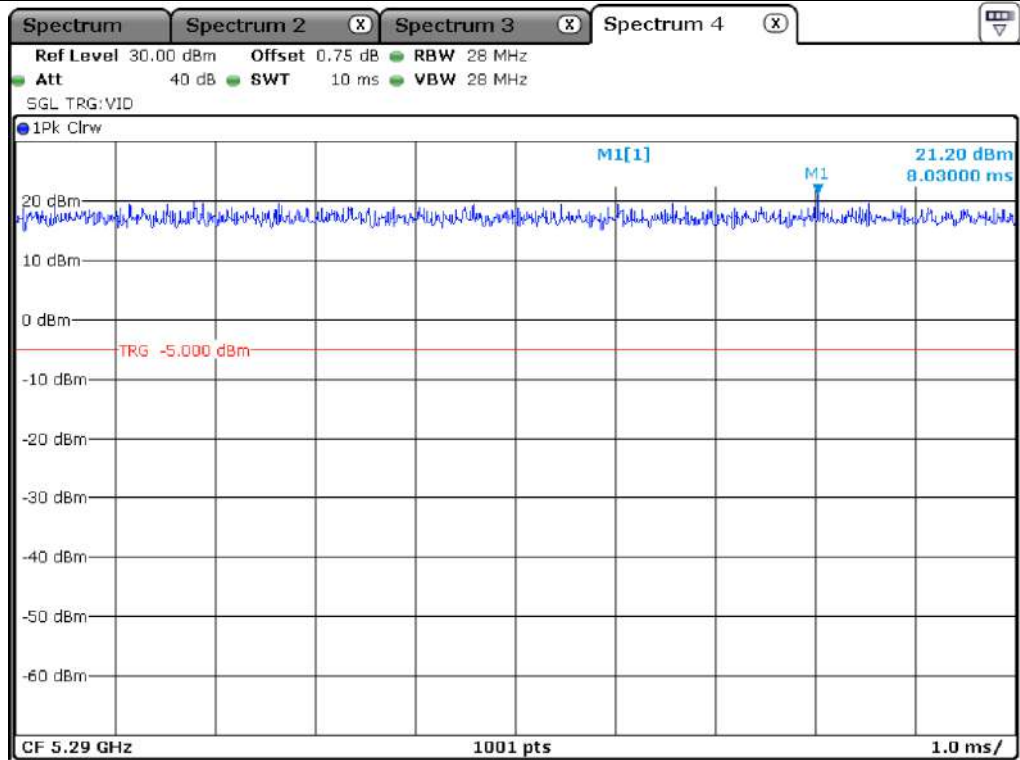


UNII 2A_802.11 VHT 80_Antenna 1

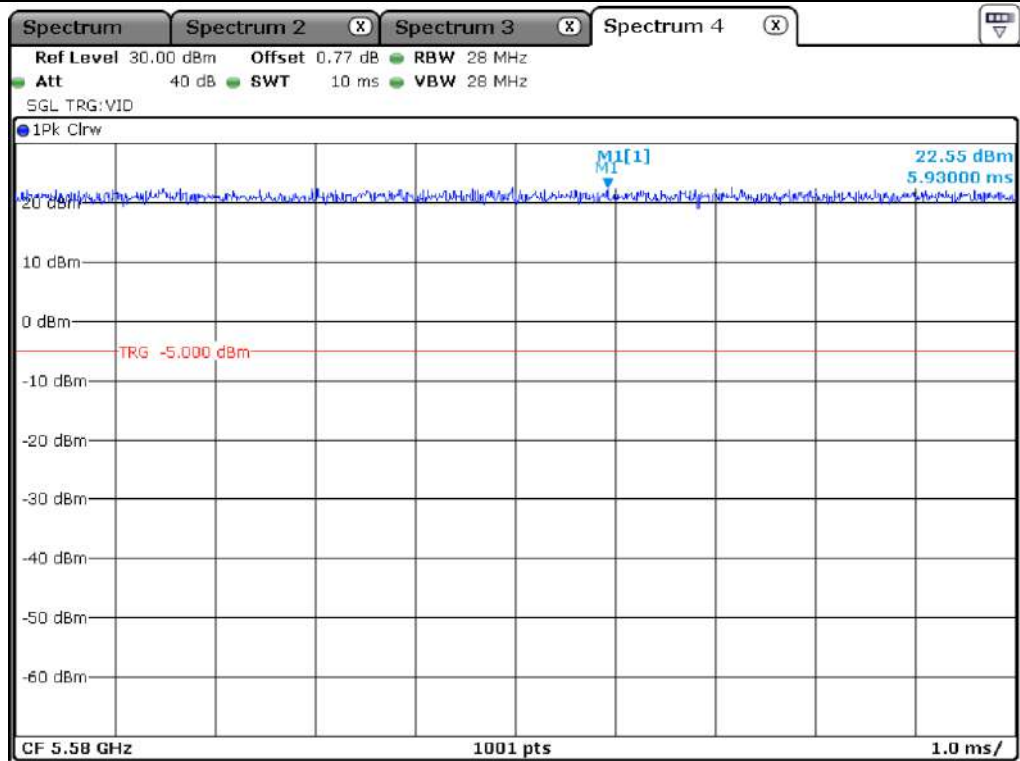


UNII 2C_802.11 a_Antenna 1

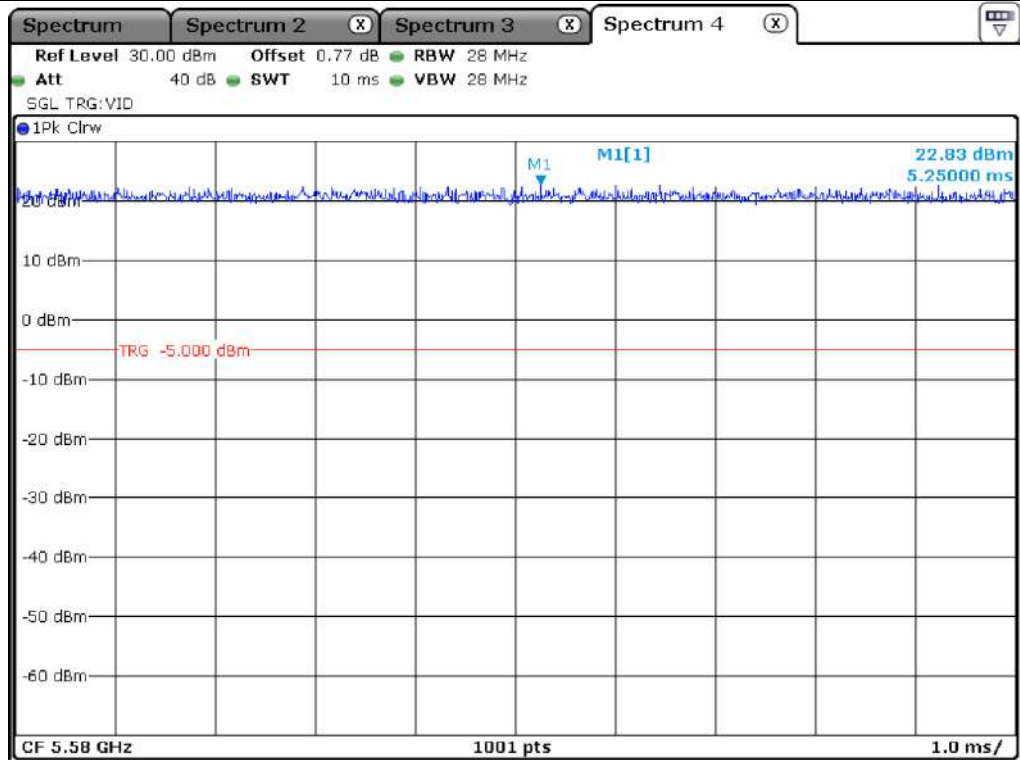


UNII 2C_802.11 HT 20_Antenna 1

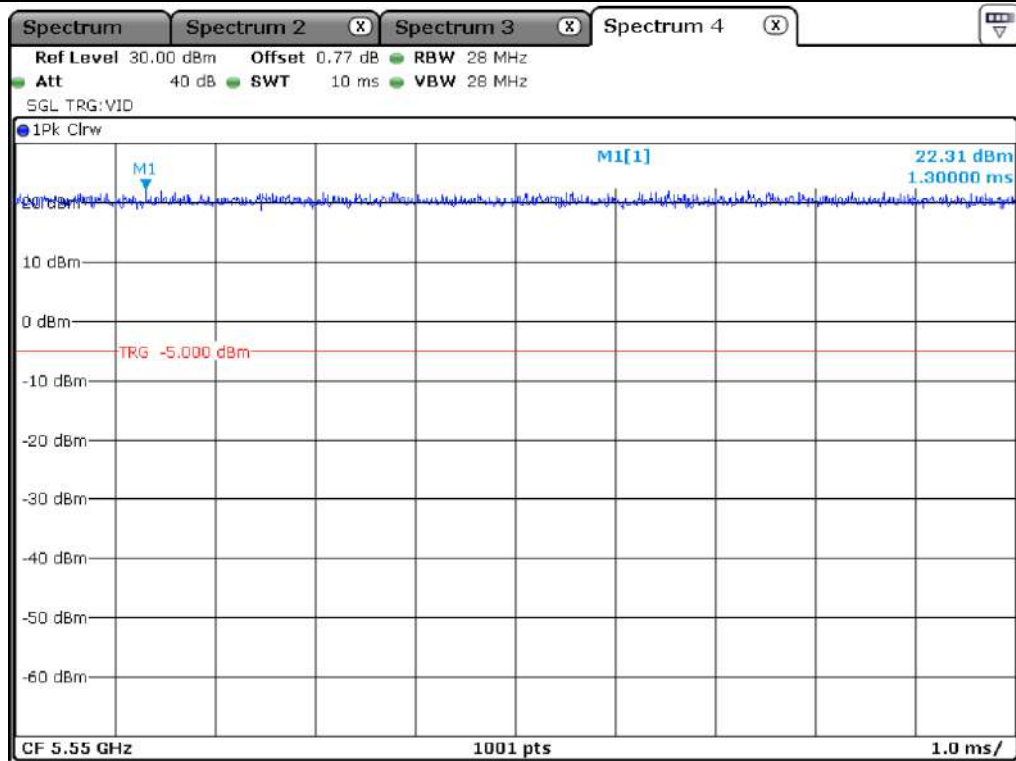


UNII 2C_802.11 HT40_Antenna 1

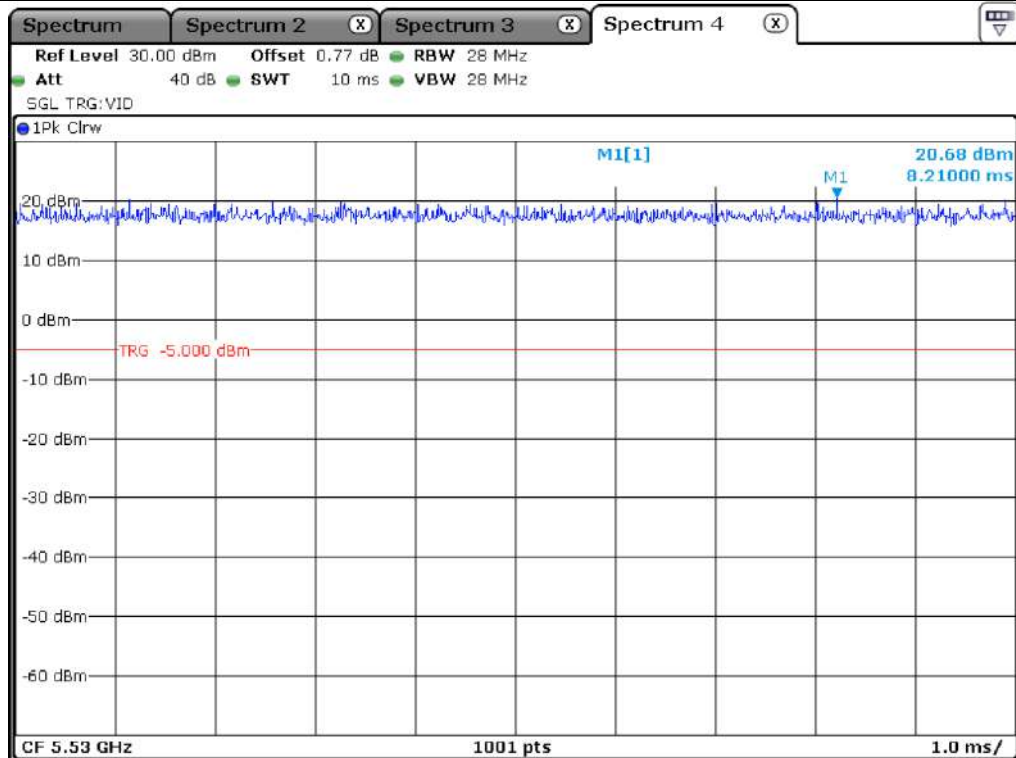


UNII 2C_802.11 VHT 80_Antenna 1

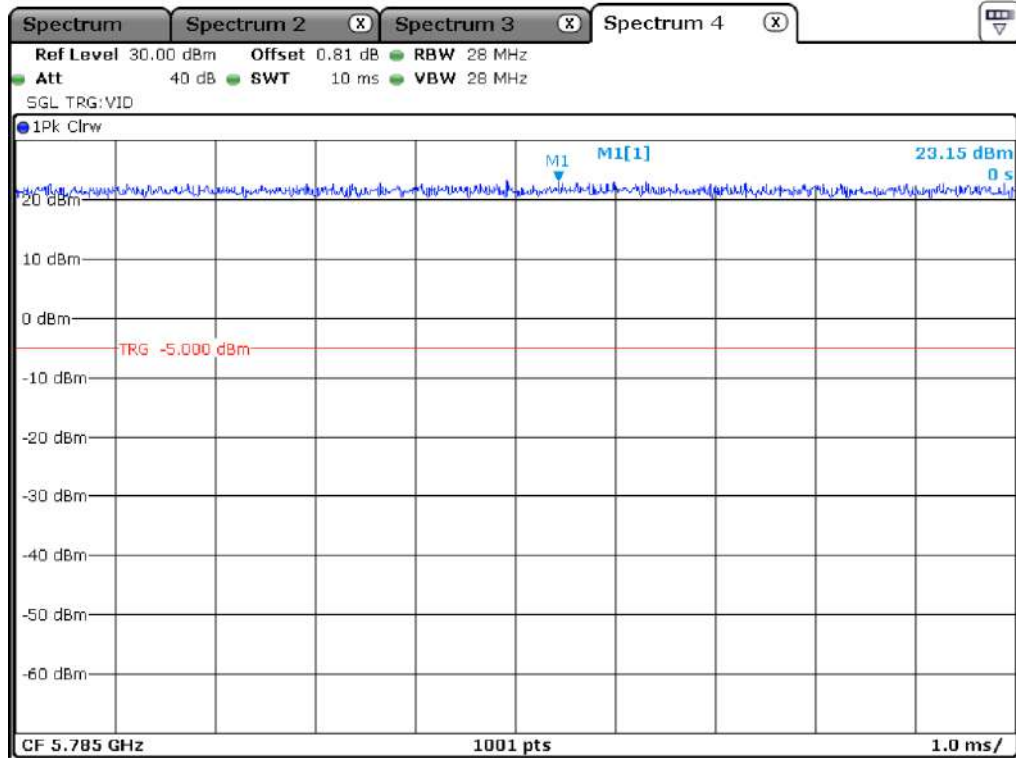


UNII 3_802.11 a_Antenna 1

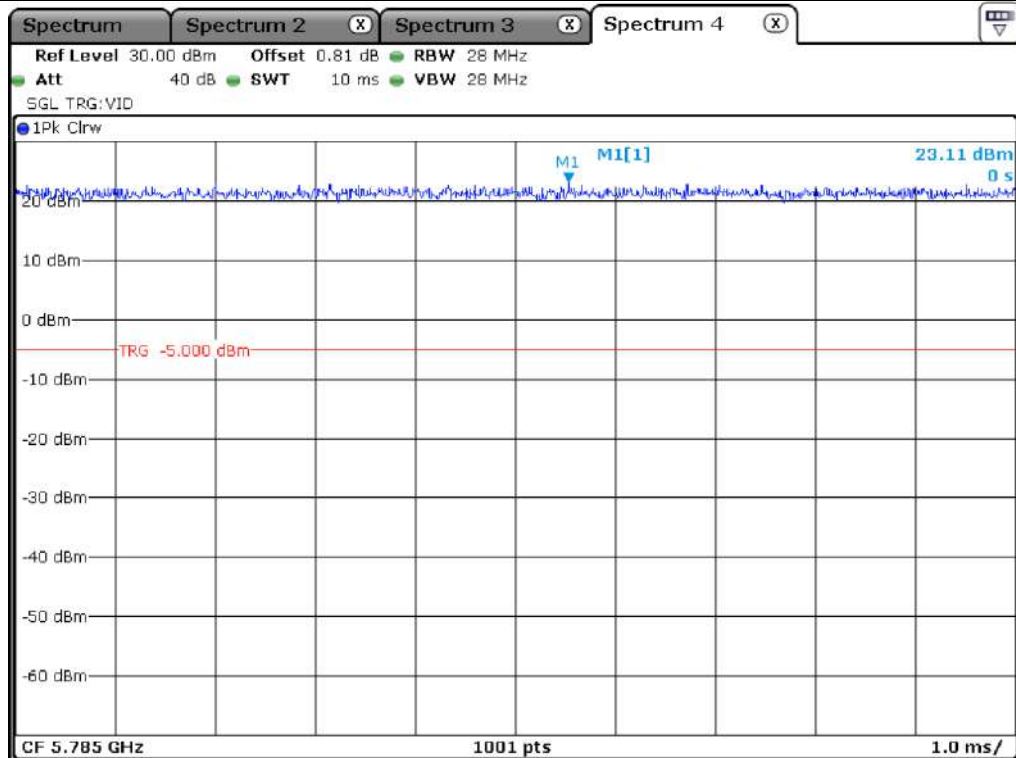

UNII 3_802.11 HT 20_Antenna 1

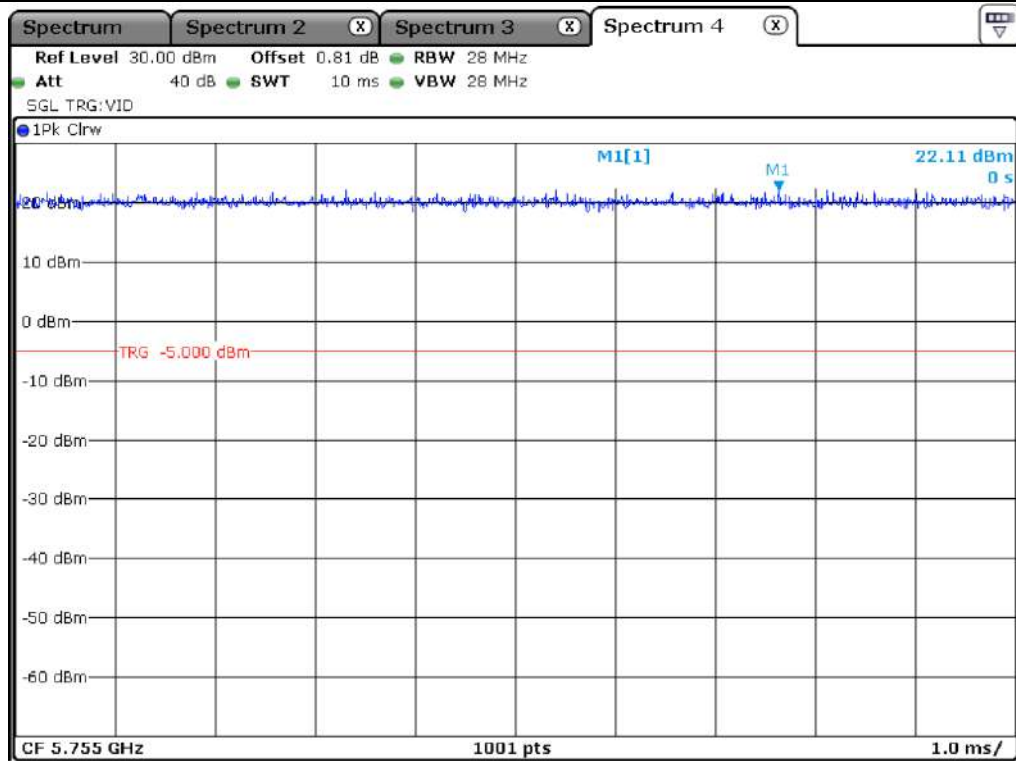

UNII 3_802.11 HT40_Antenna 1

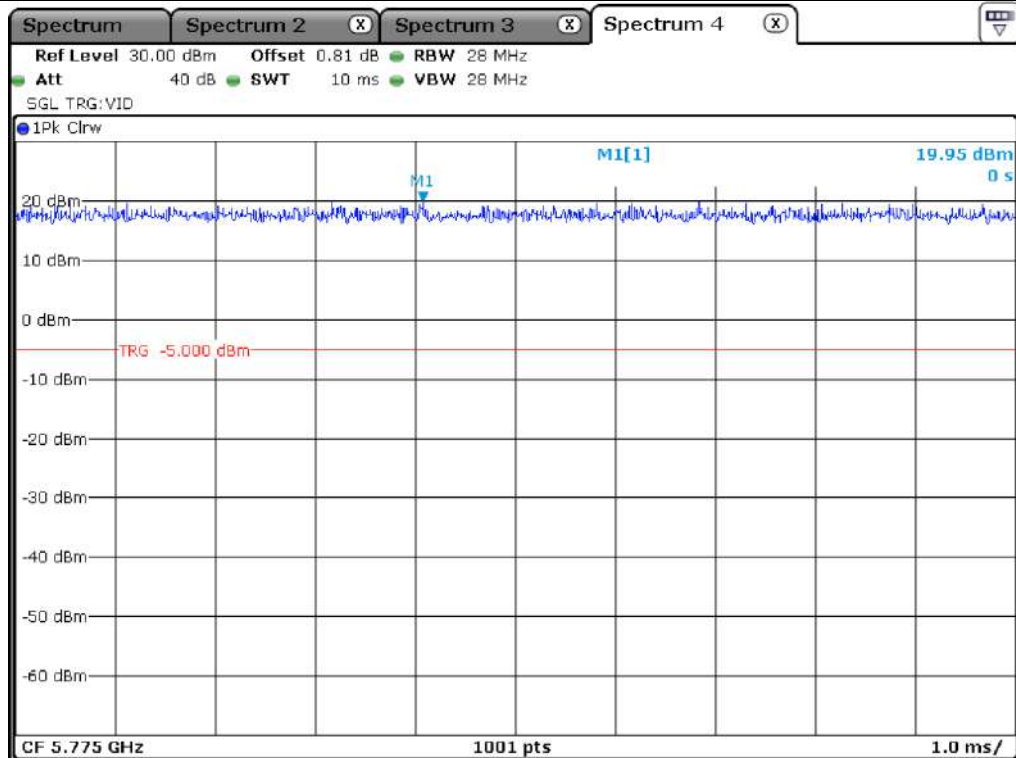


UNII 3_802.11 VHT 80_Antenna 1

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

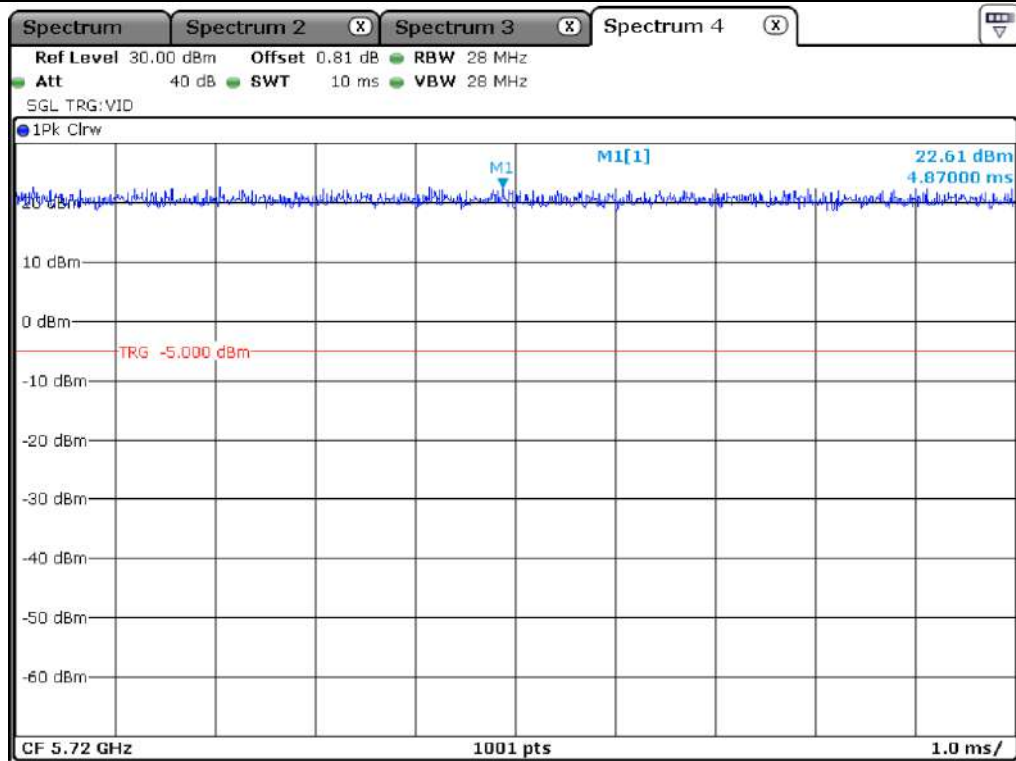


Staddle_802.11 a_Antenna 0

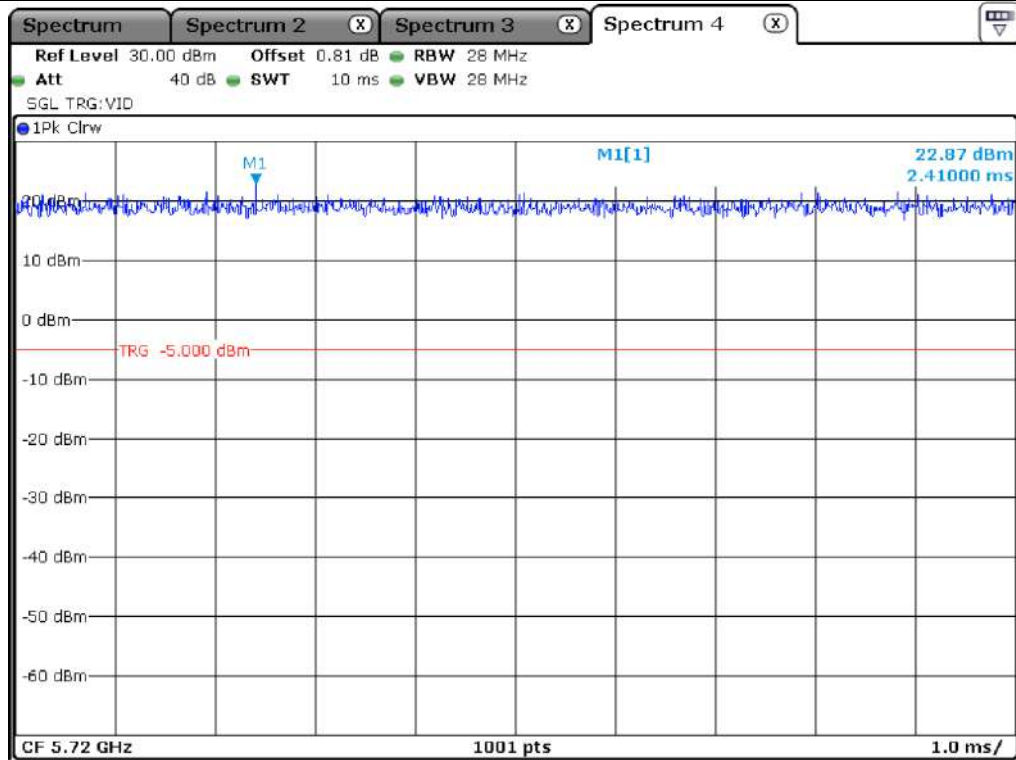


Staddle_802.11 HT 20_Antenna 0

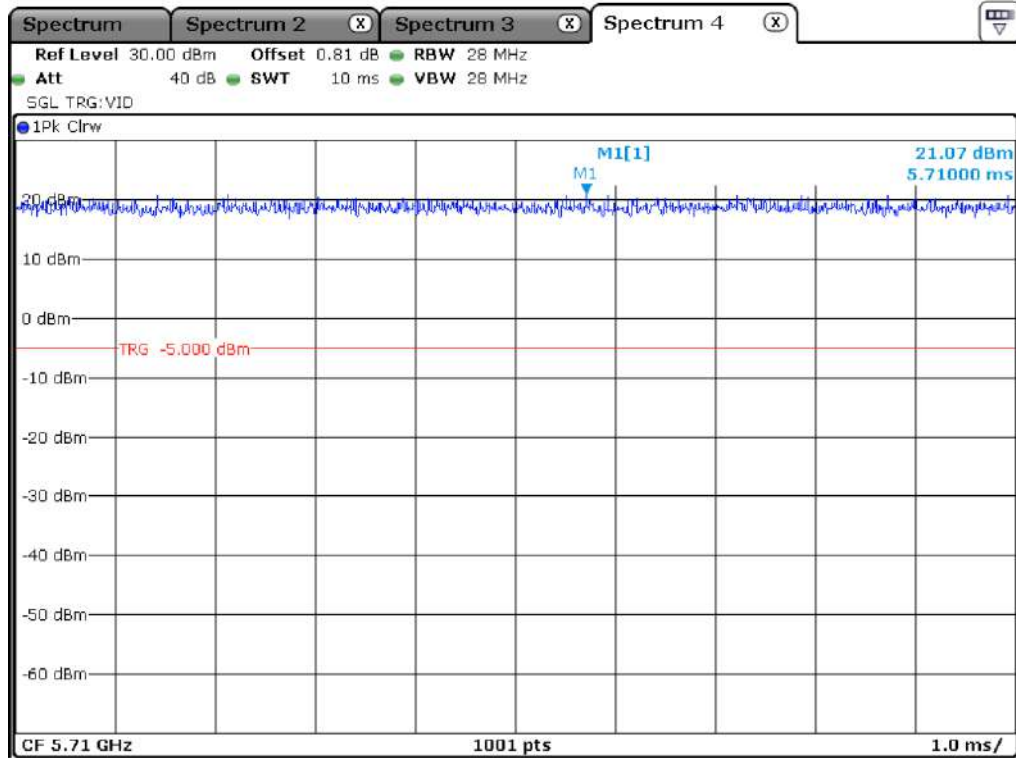


Staddle_802.11 HT40_Antenna 0

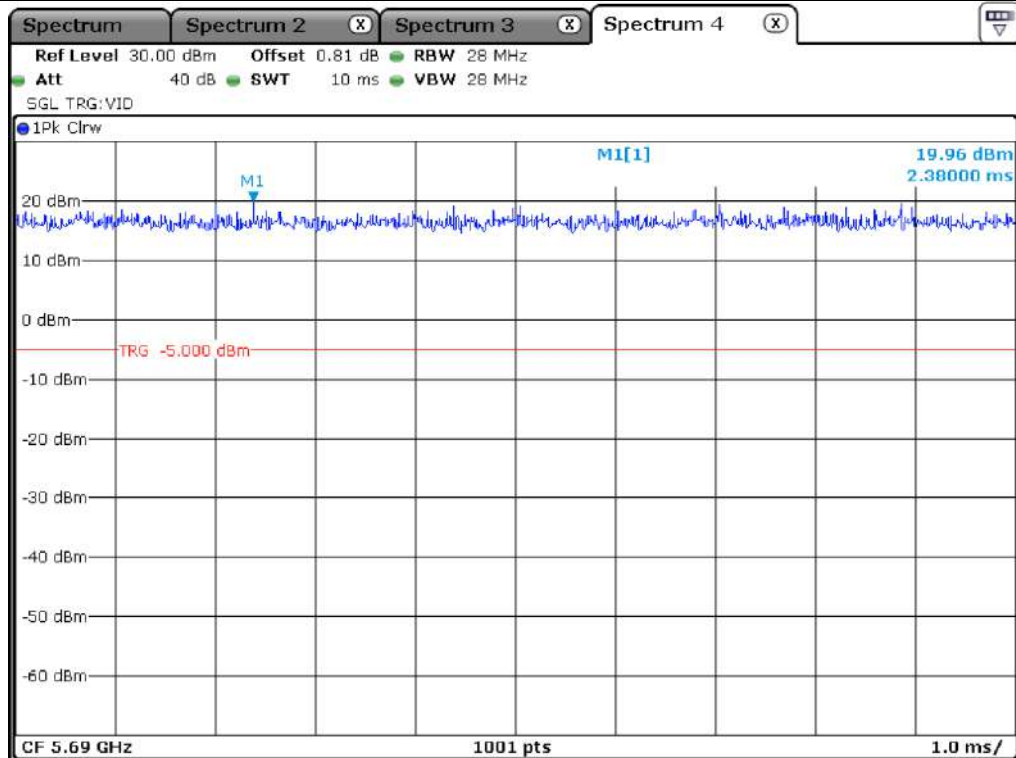


Staddle_802.11 VHT 80_Antenna 0

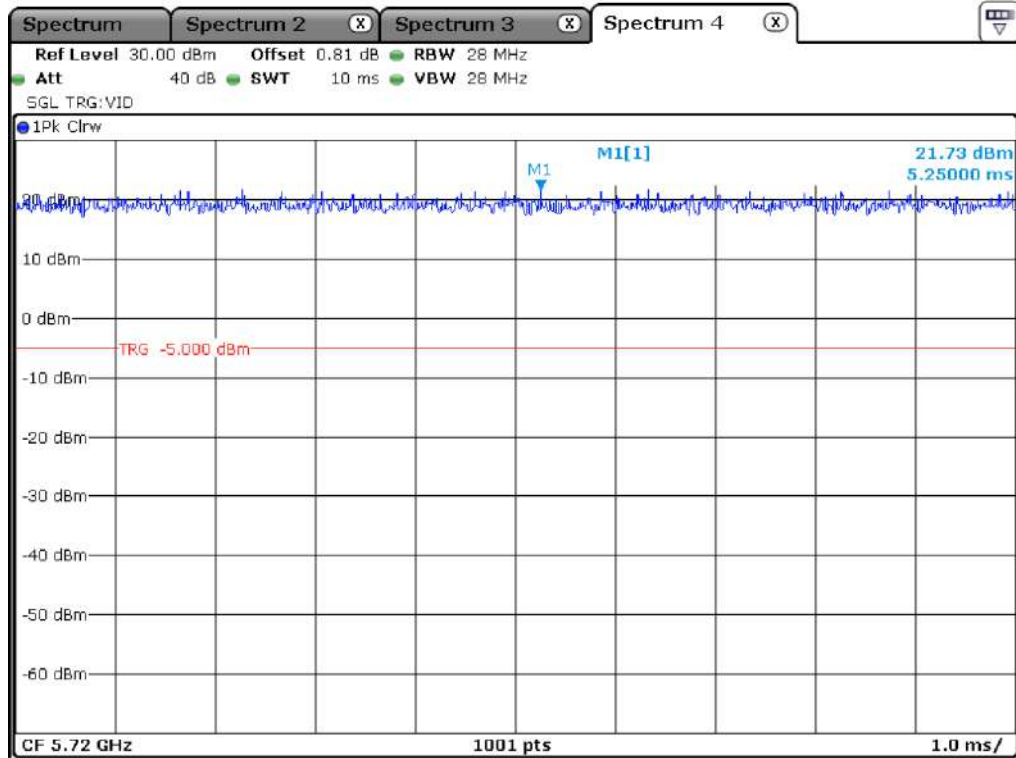


Staddle_802.11 a_Antenna 1

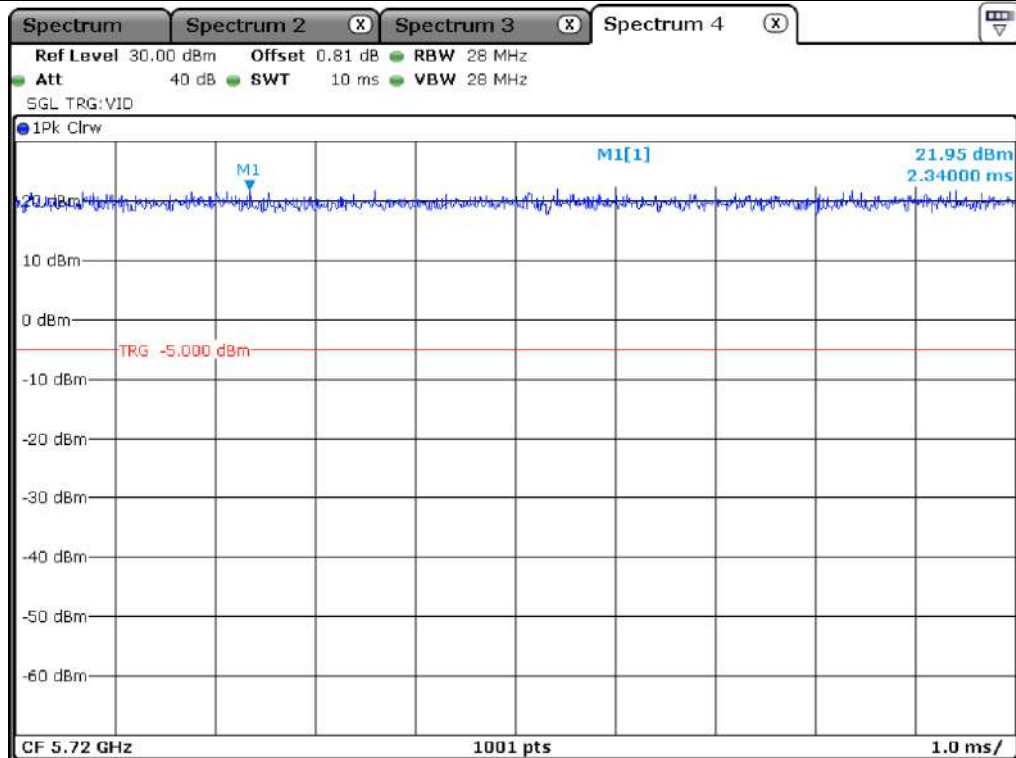

Staddle_802.11 HT 20_Antenna 1

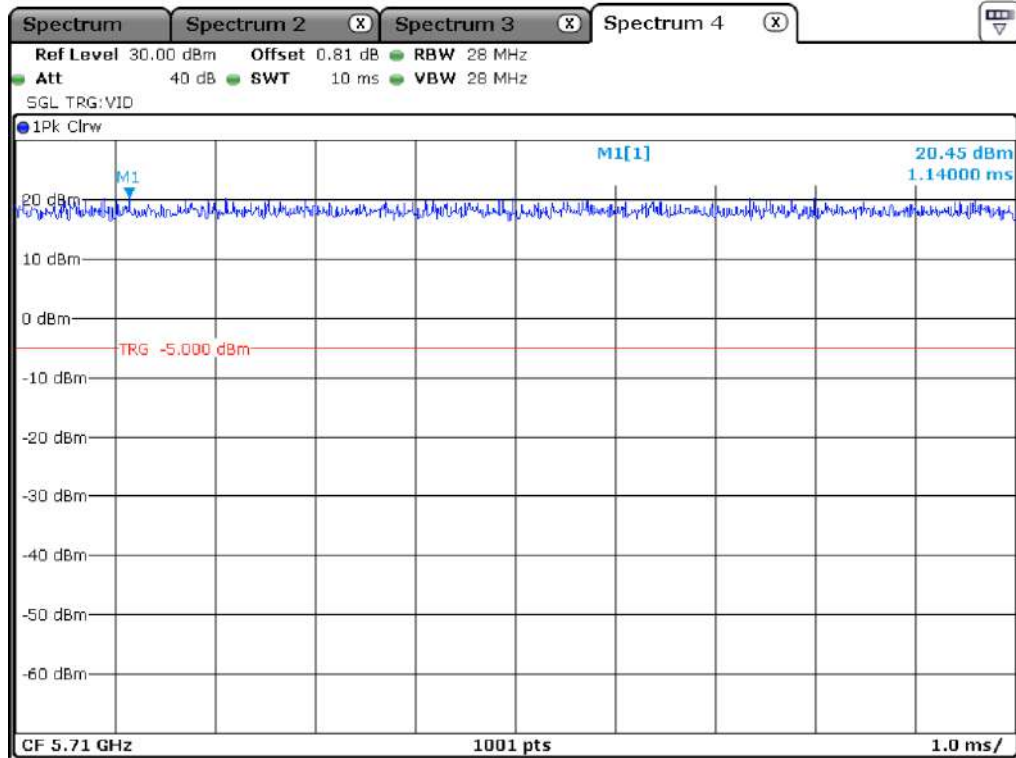

Staddle_802.11 HT40_Antenna 1

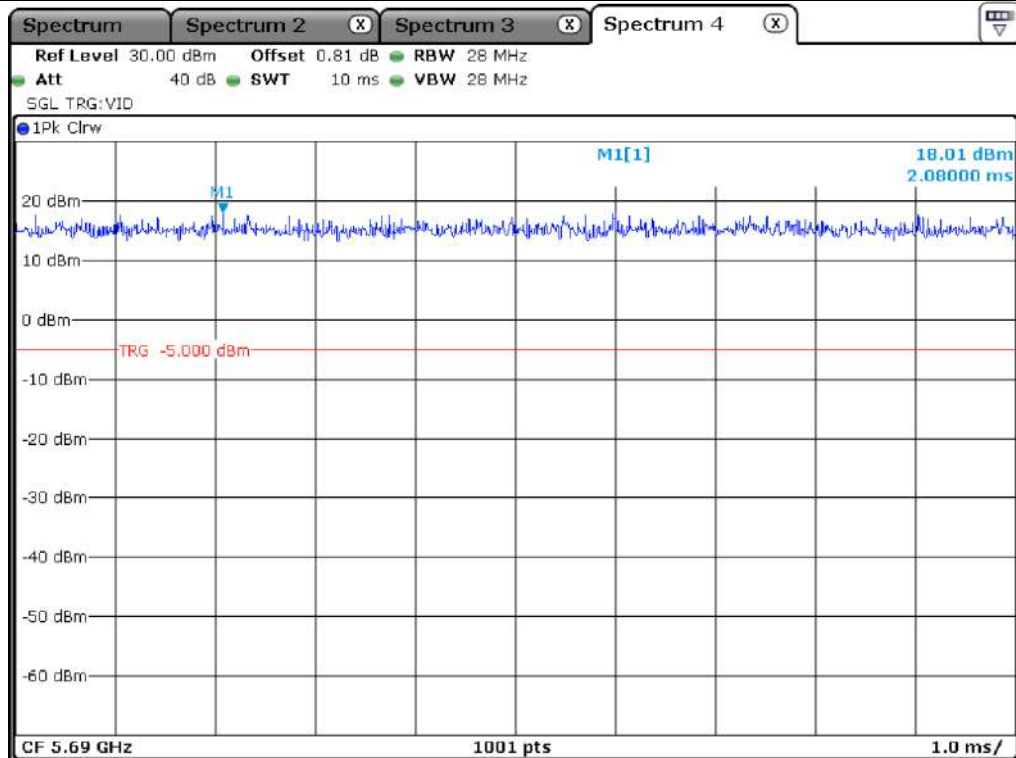

Staddle_802.11 VHT 80_Antenna 1

5.4 Configuration of Test System

Line Conducted Test: The EUT was connected to USB and the power of USB was connected to Notebook PC. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a Chip Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MINIMUM 26 dB BANDWIDTH

7.1 Operating environment

Temperature : 22 °C
Relative humidity : 44 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 26 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 26 dB.



7.3 Test Date

May 10, 2021 ~ May 26, 2021


7.4 Test data for 802.11a RLAN Mode

7.4.1 Test data for Antenna 0


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	19.93
	Middle	5 220.00	19.73
	High	5 240.00	19.78
5 250 ~ 5 350	Low	5 260.00	19.63
	Middle	5 300.00	19.58
	High	5 320.00	19.73
5 470 ~ 5 725	Low	5 500.00	19.83
	Middle	5 580.00	19.79
	High	5 700.00	19.93
5 725 ~ 5 850	Low	5 745.00	19.98
	Middle	5 785.00	19.93
	High	5 825.00	19.98


Remark: See next page for measurement data.

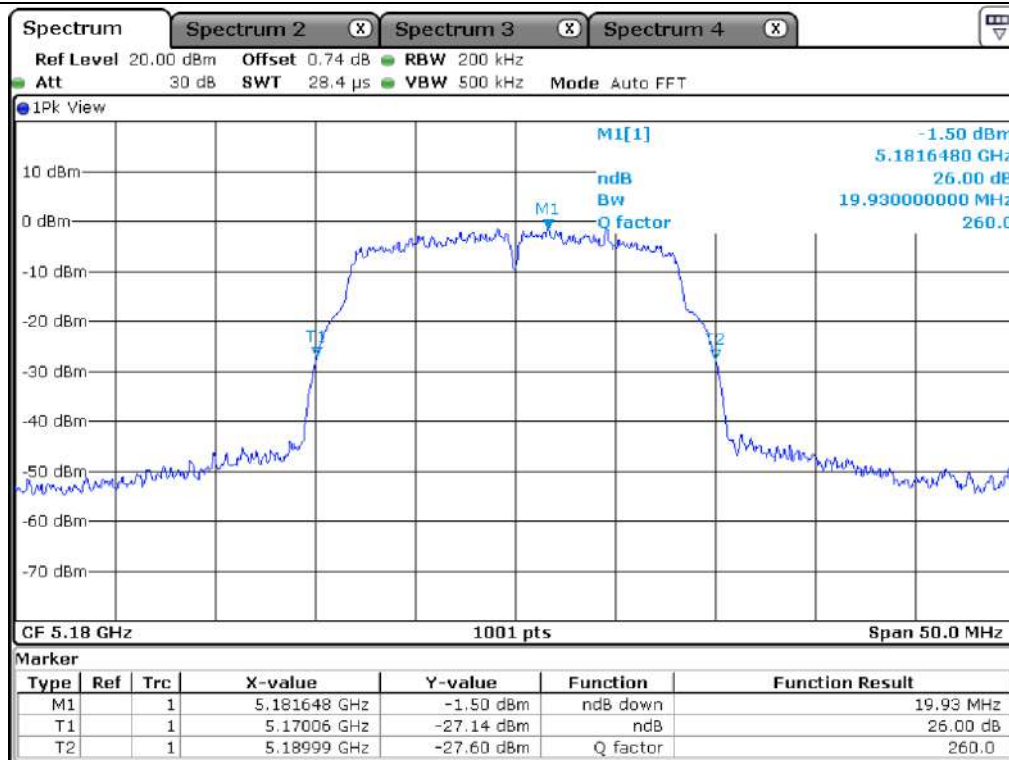


Low Channel (5 180 MHz)

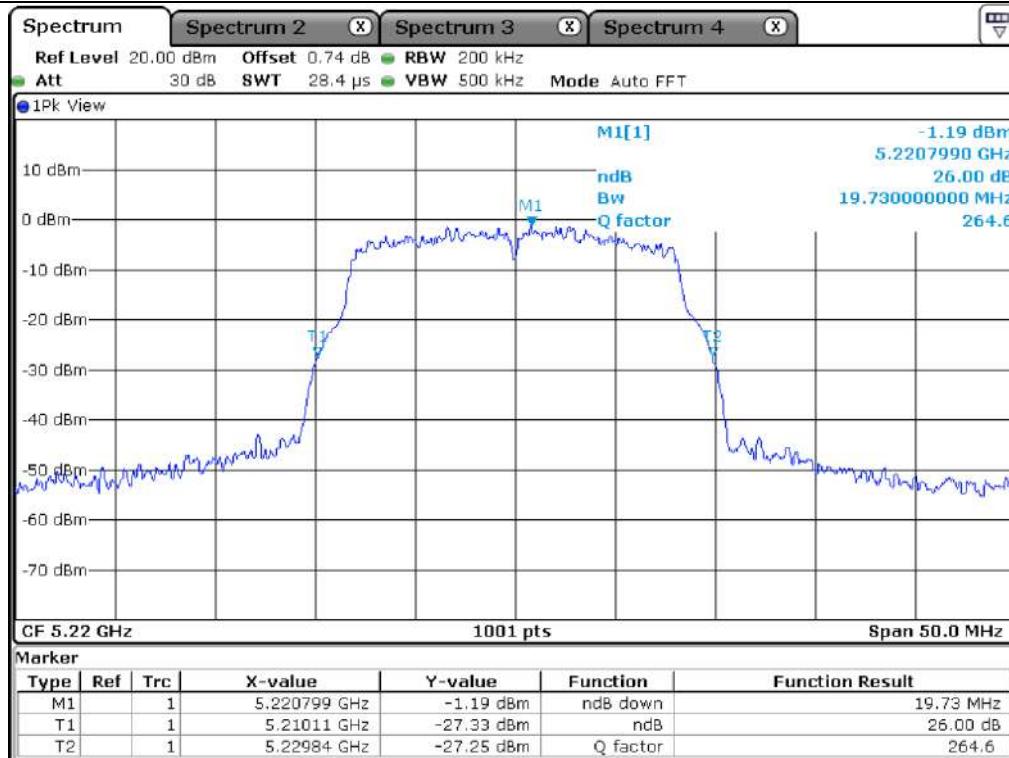


Middle Channel (5 220 MHz)

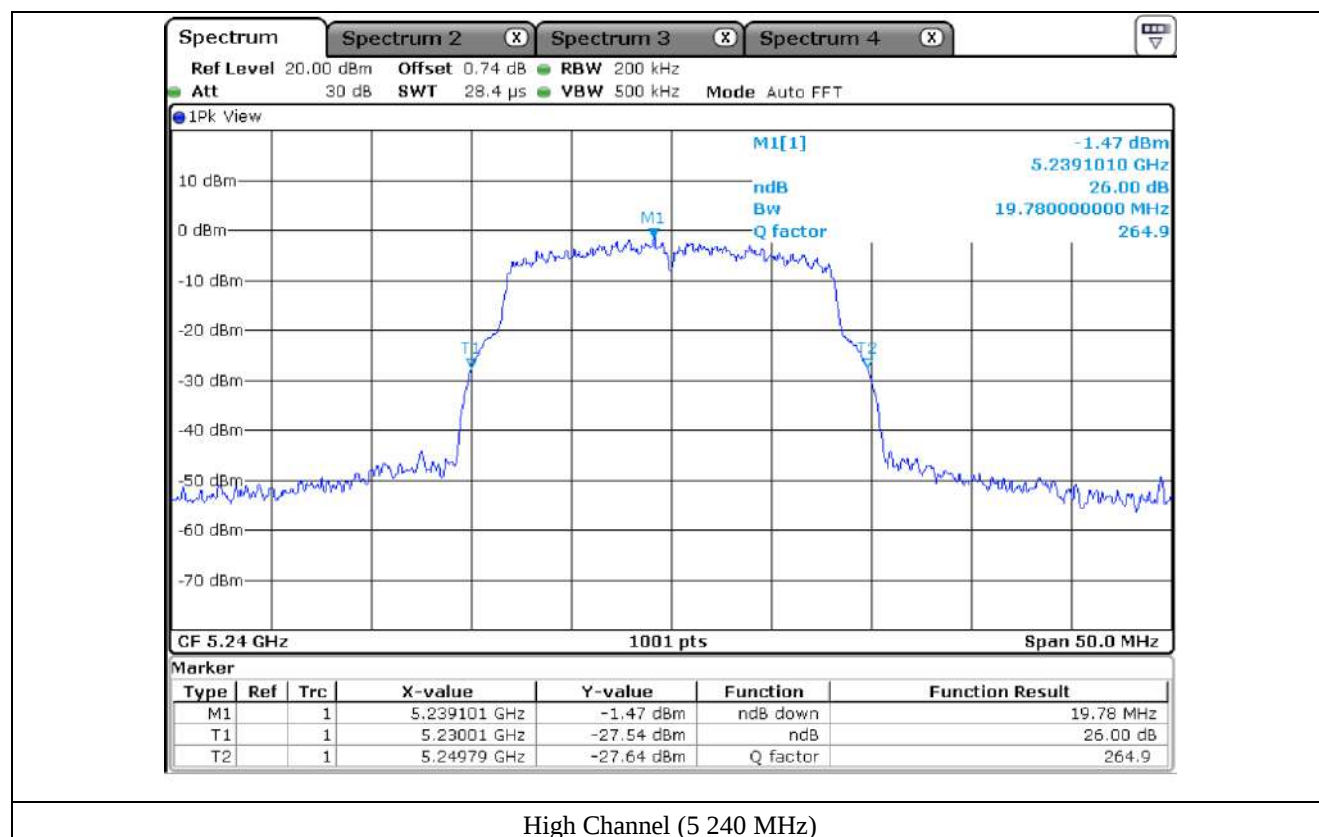

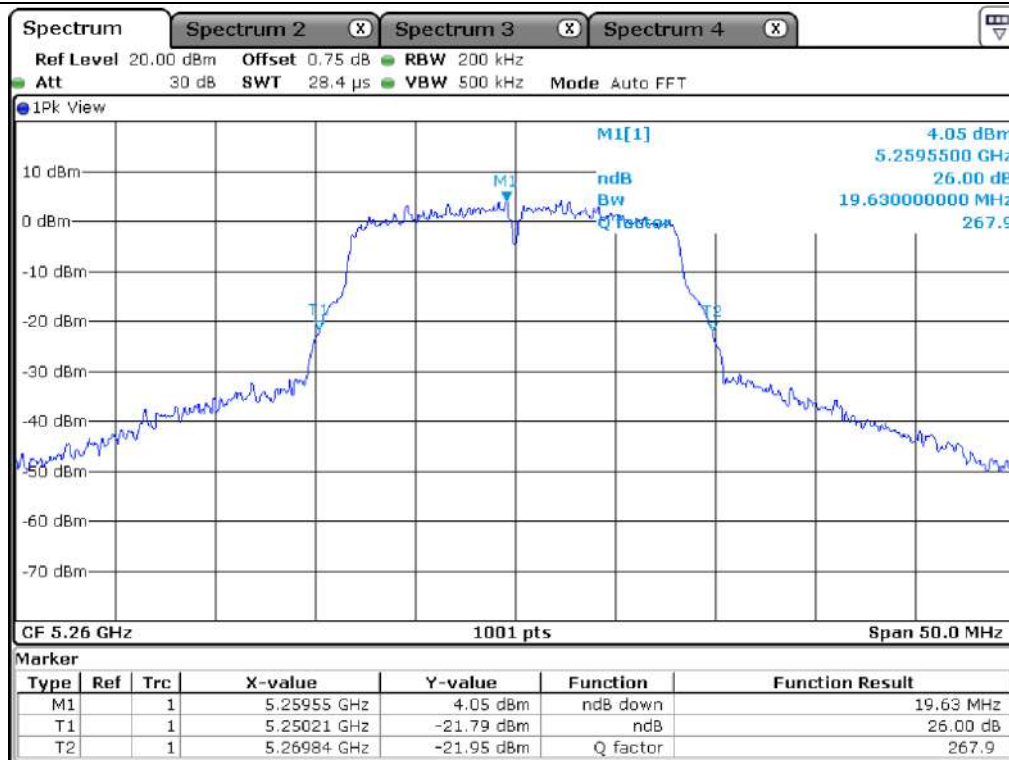

Low Channel (5 260 MHz)

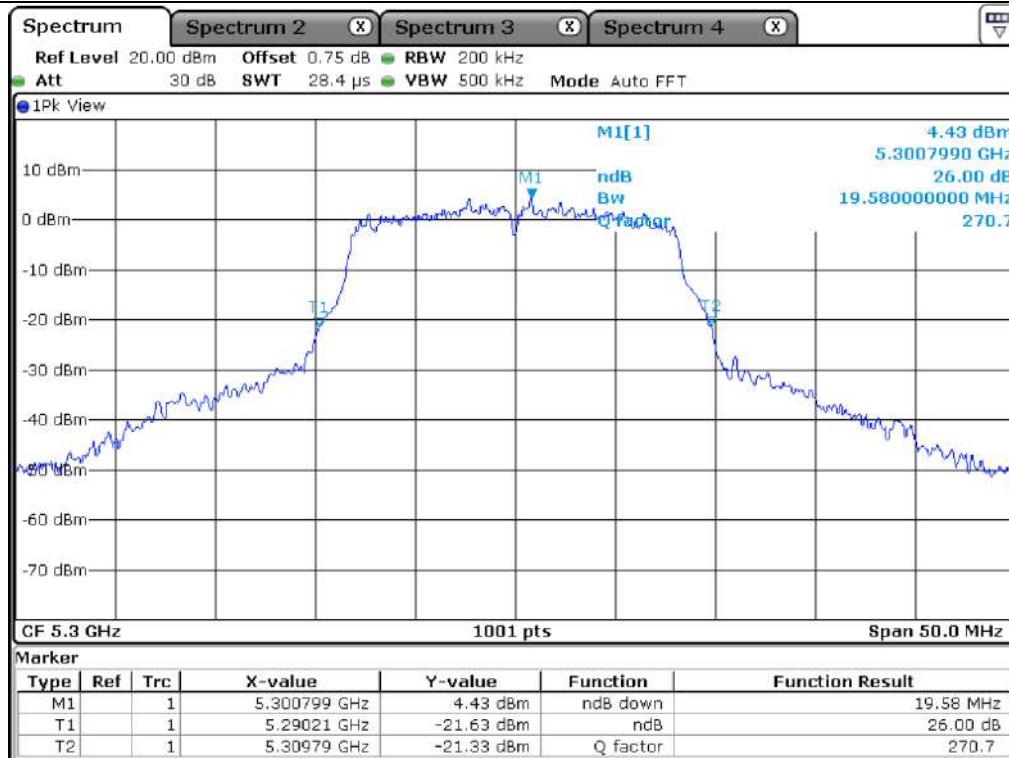


Middle Channel (5 300 MHz)

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

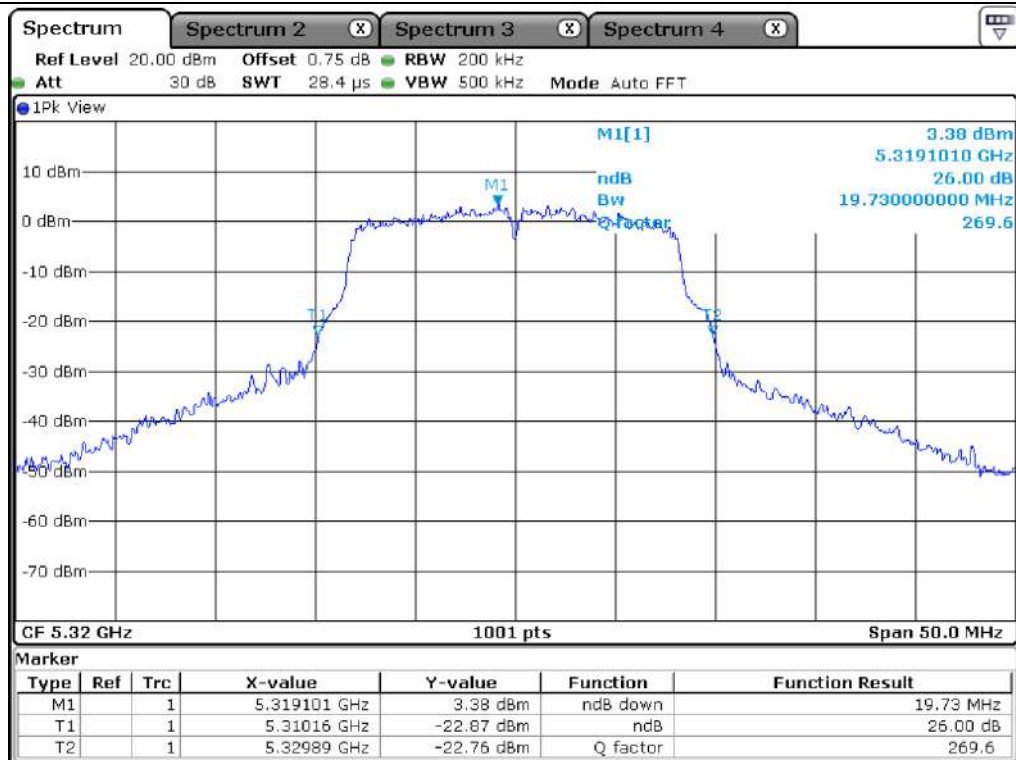

High Channel (5 320 MHz)

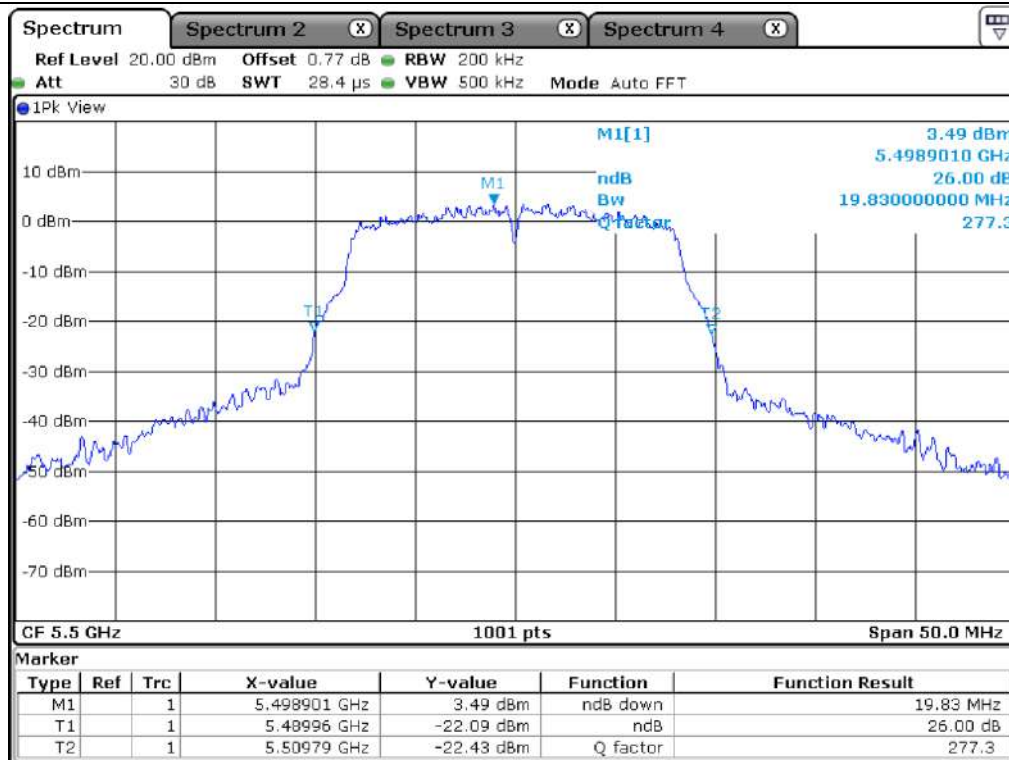

Low Channel (5 500 MHz)

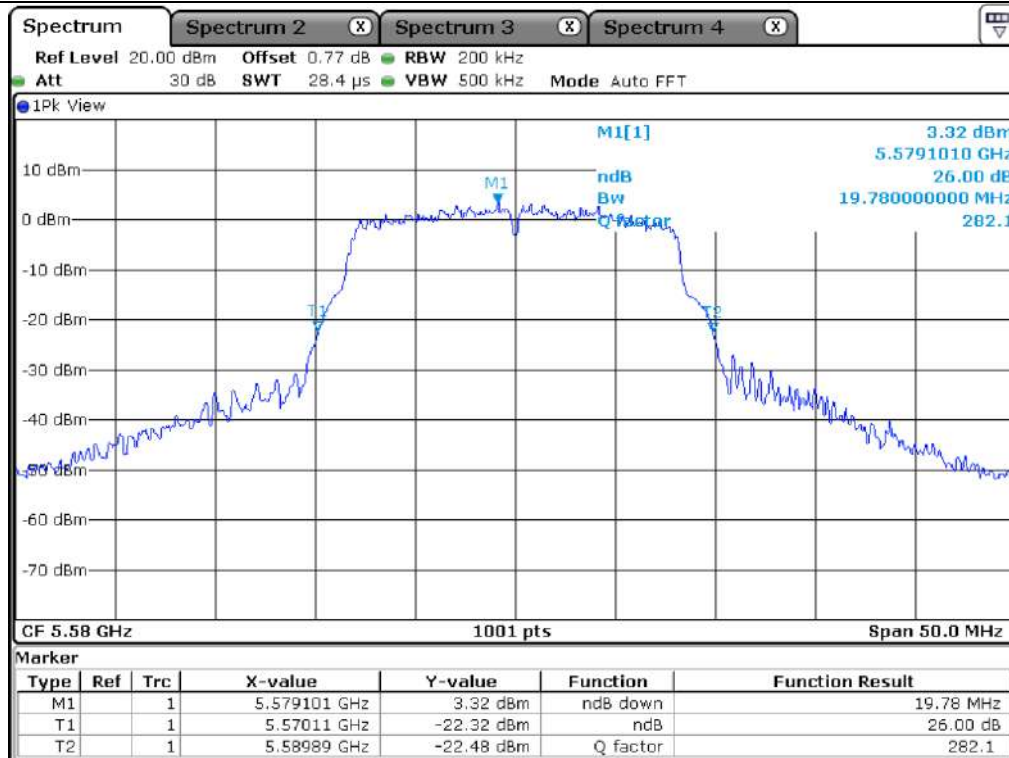


Middle Channel (5 580 MHz)

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

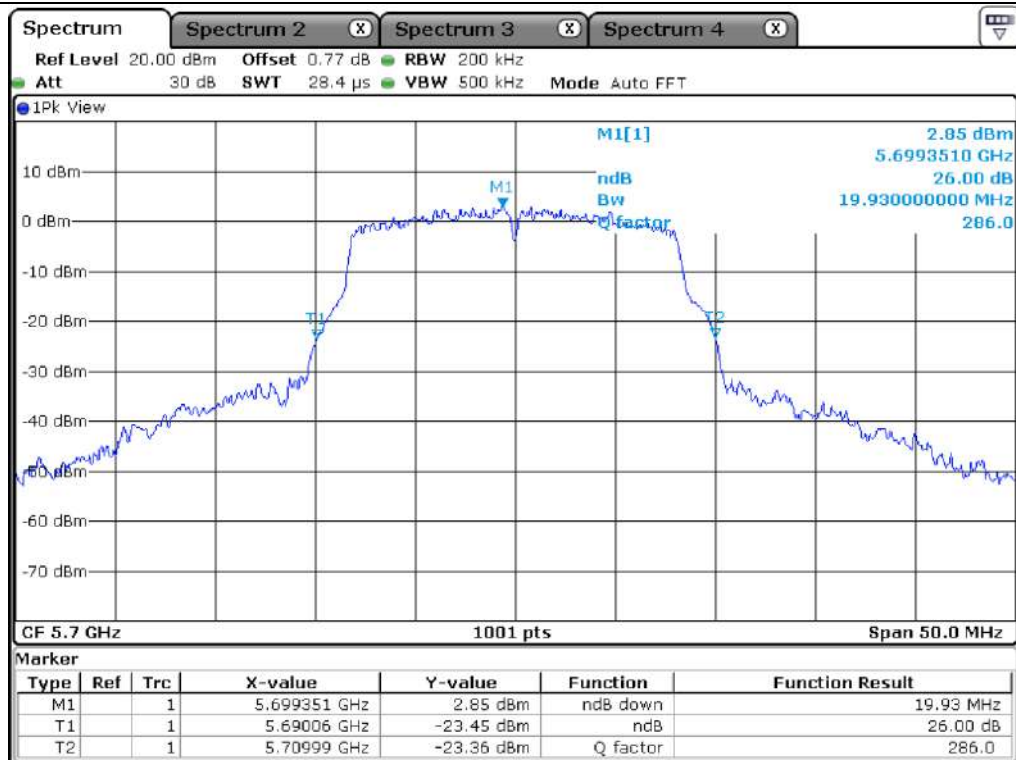

High Channel (5 700 MHz)

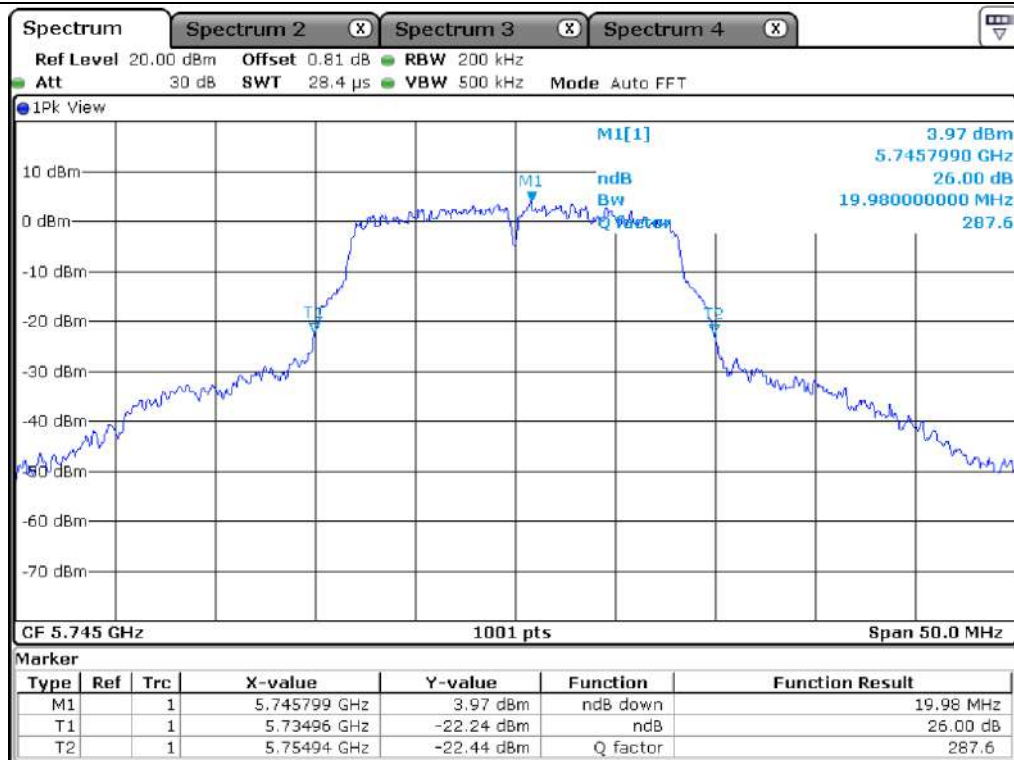

Low Channel (5 745 MHz)

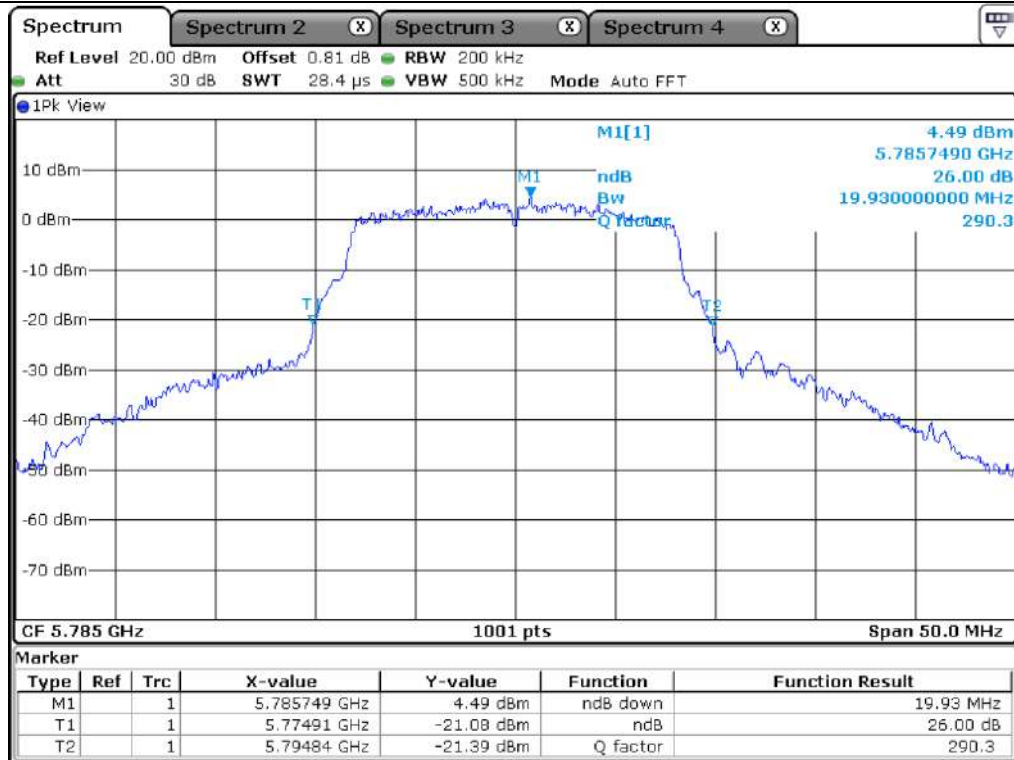


Middle Channel (5 785 MHz)

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

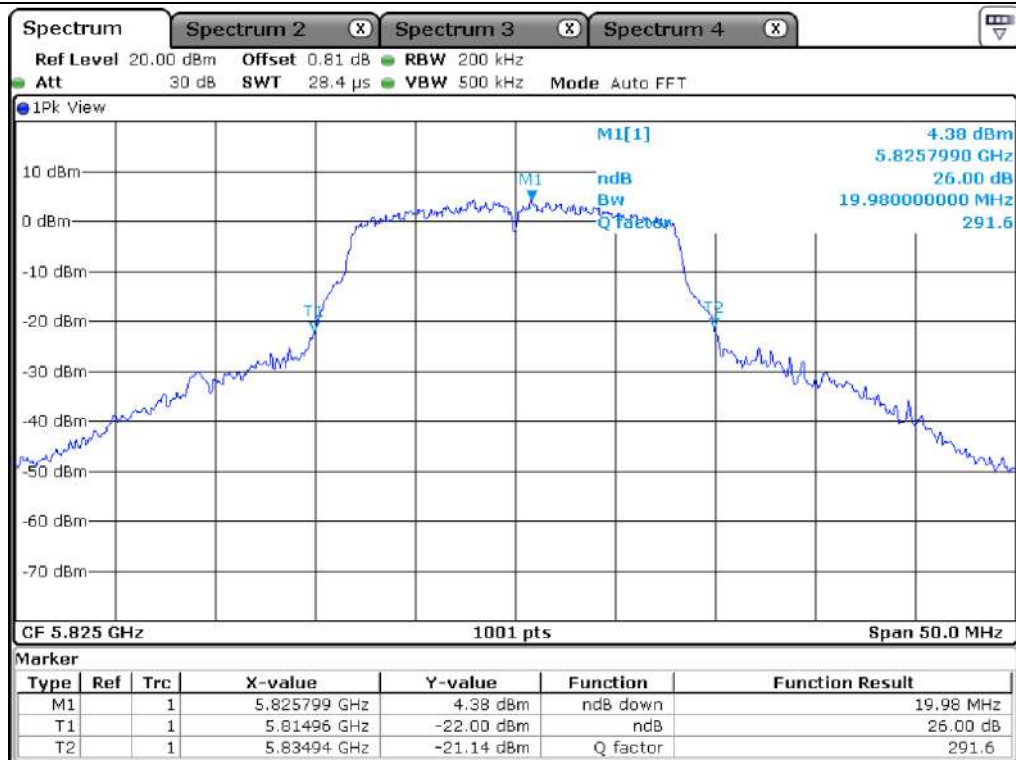


High Channel (5 825 MHz)

7.4.2 Test data for Antenna 1


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	19.83
	Middle	5 220.00	19.63
	High	5 240.00	19.53
5 250 ~ 5 350	Low	5 260.00	19.98
	Middle	5 300.00	19.83
	High	5 320.00	19.98
5 470 ~ 5 725	Low	5 500.00	19.88
	Middle	5 580.00	20.23
	High	5 700.00	20.08
5 725 ~ 5 850	Low	5 745.00	19.93
	Middle	5 785.00	20.23
	High	5 825.00	19.83


Remark: See next page for measurement data.

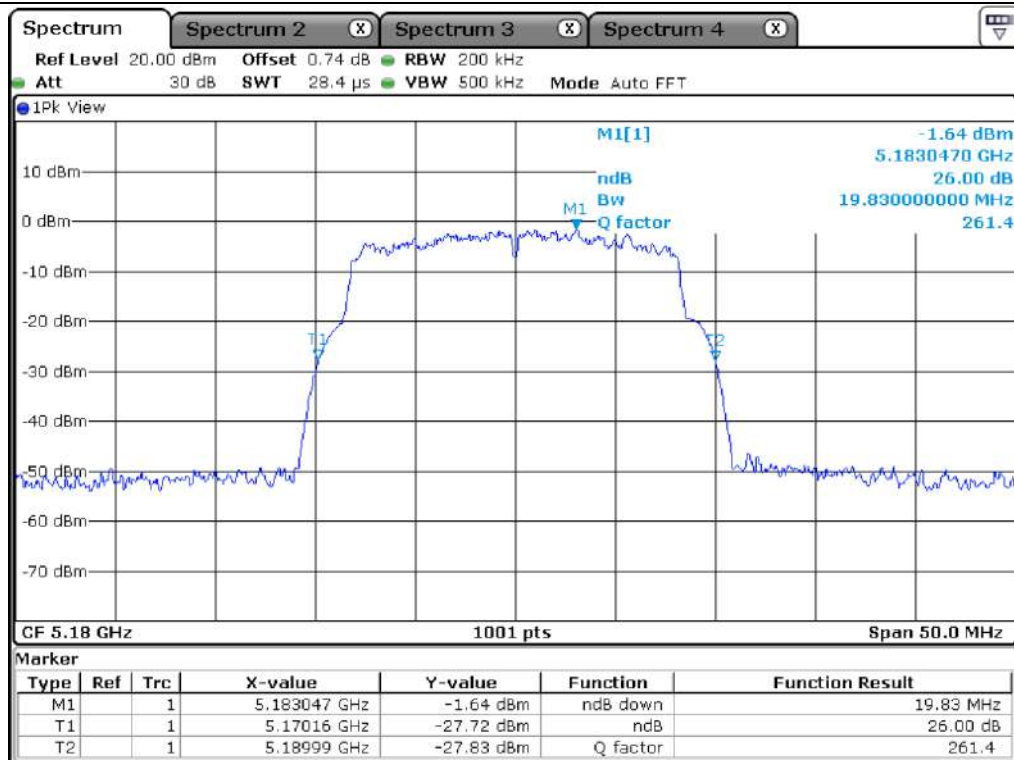


Low Channel (5 180 MHz)

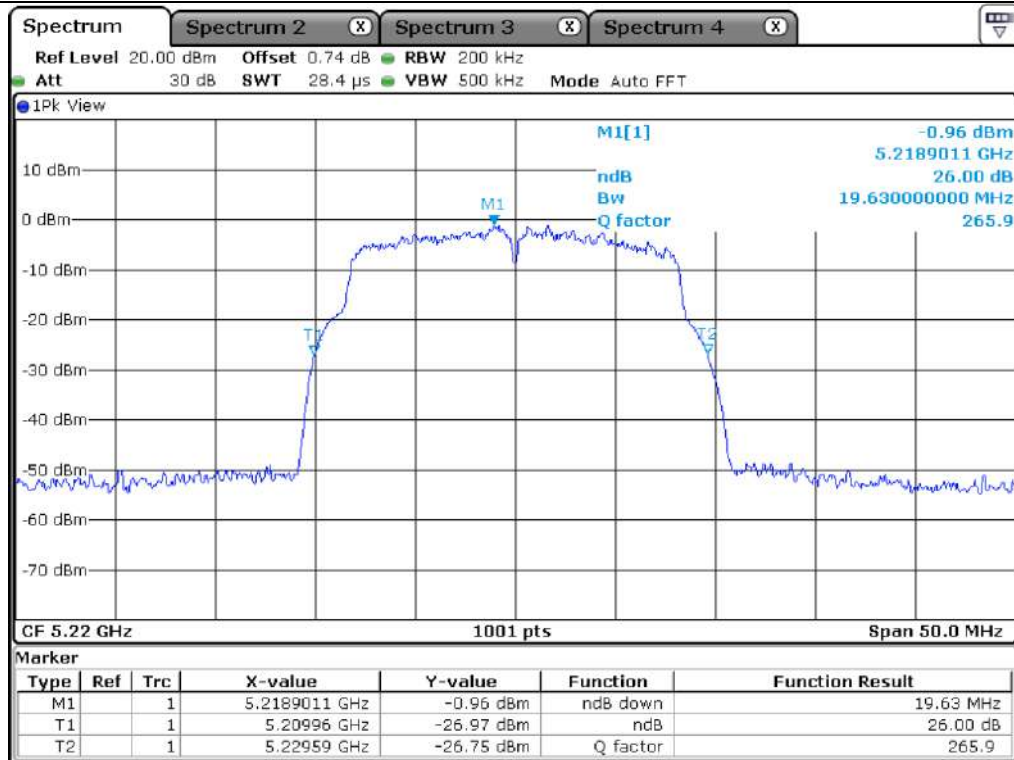


Middle Channel (5 220 MHz)

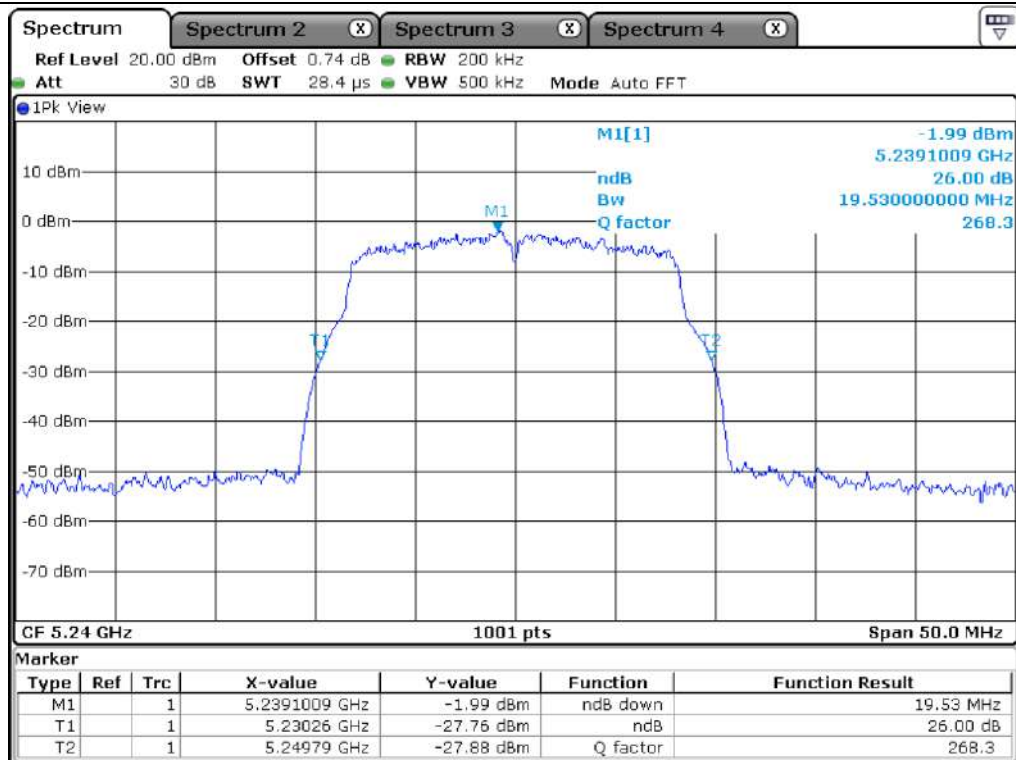

High Channel (5 240 MHz)

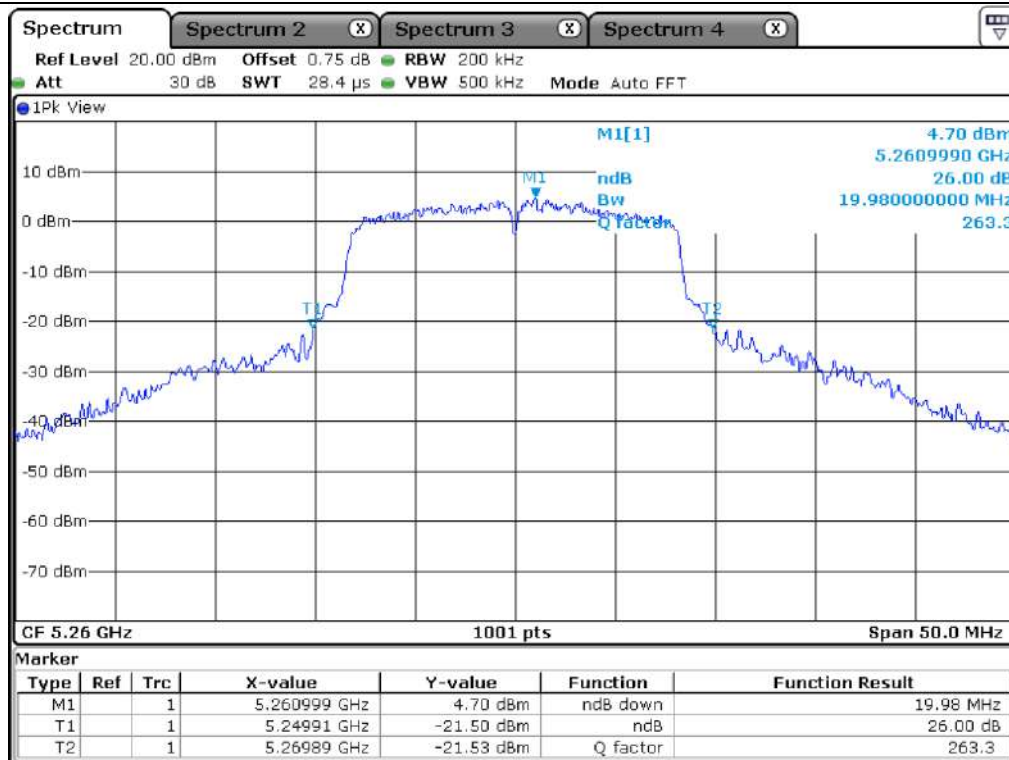

Low Channel (5 260 MHz)

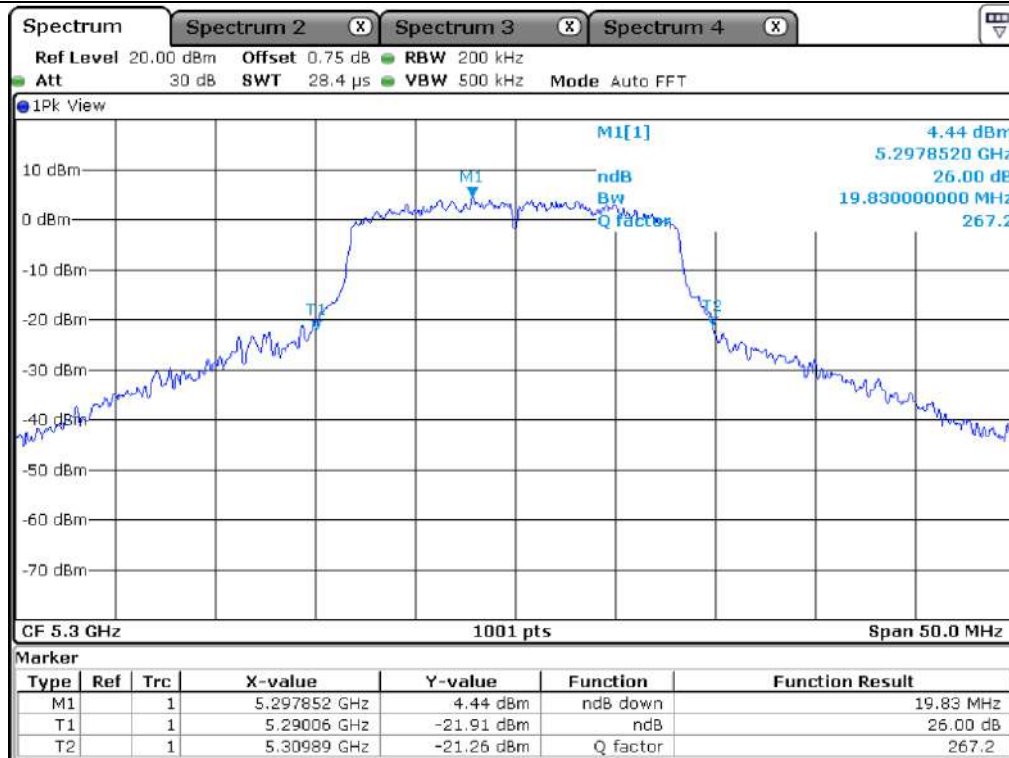


Middle Channel (5 300 MHz)

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

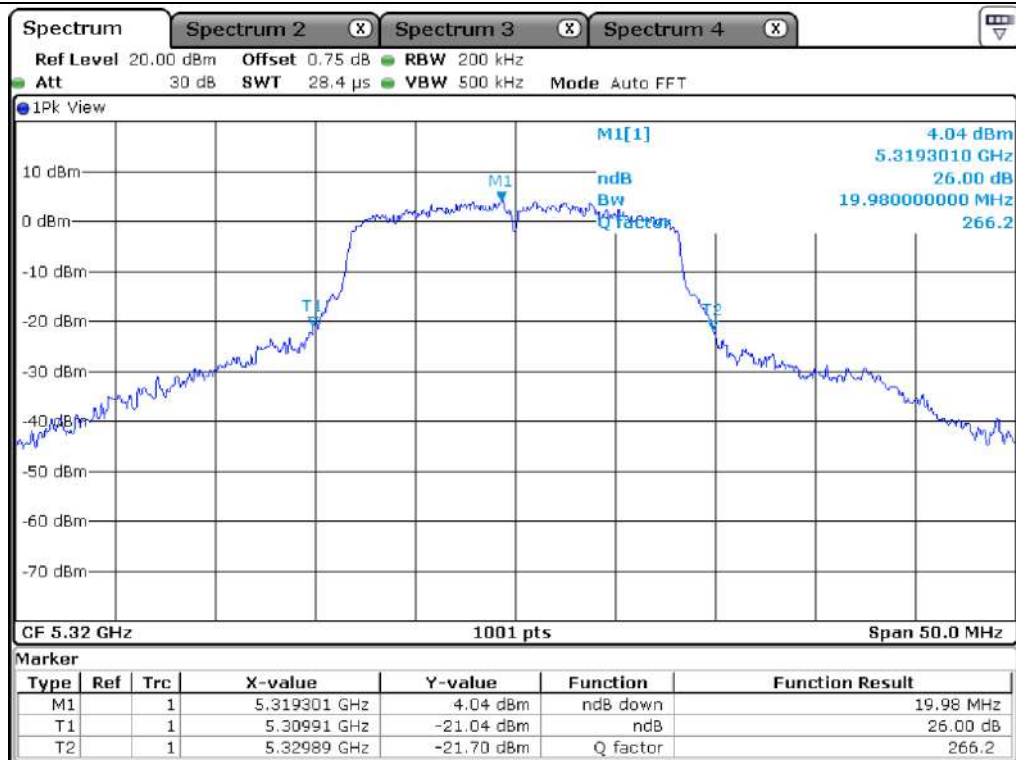


High Channel (5 320 MHz)

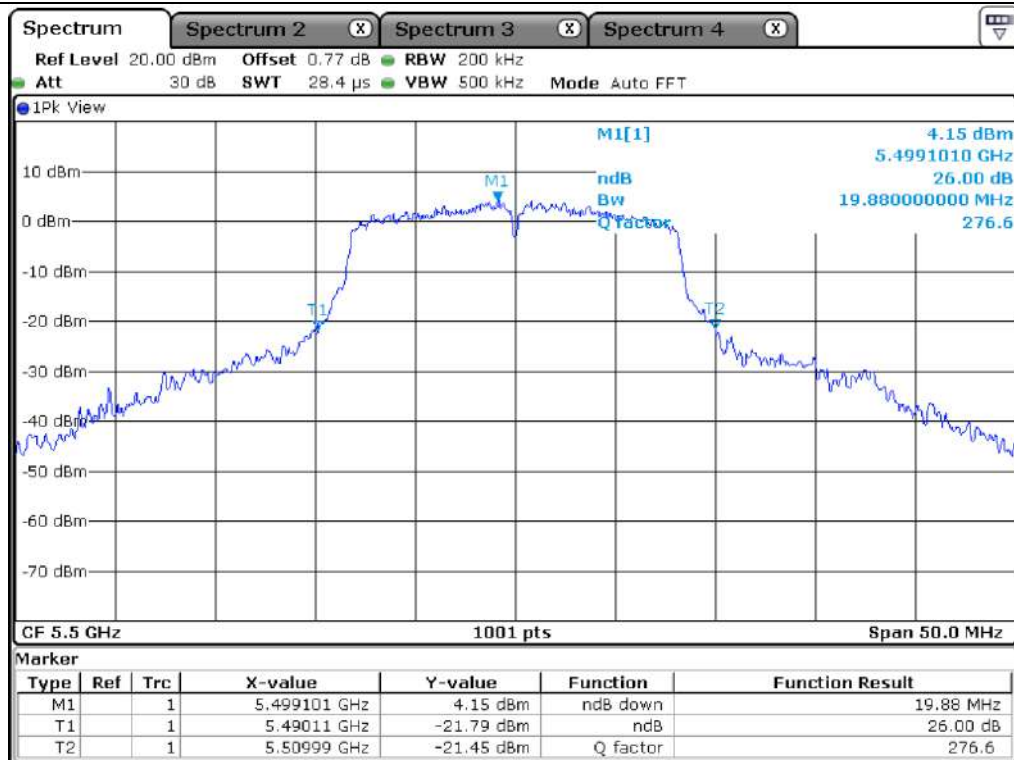


Low Channel (5 500 MHz)

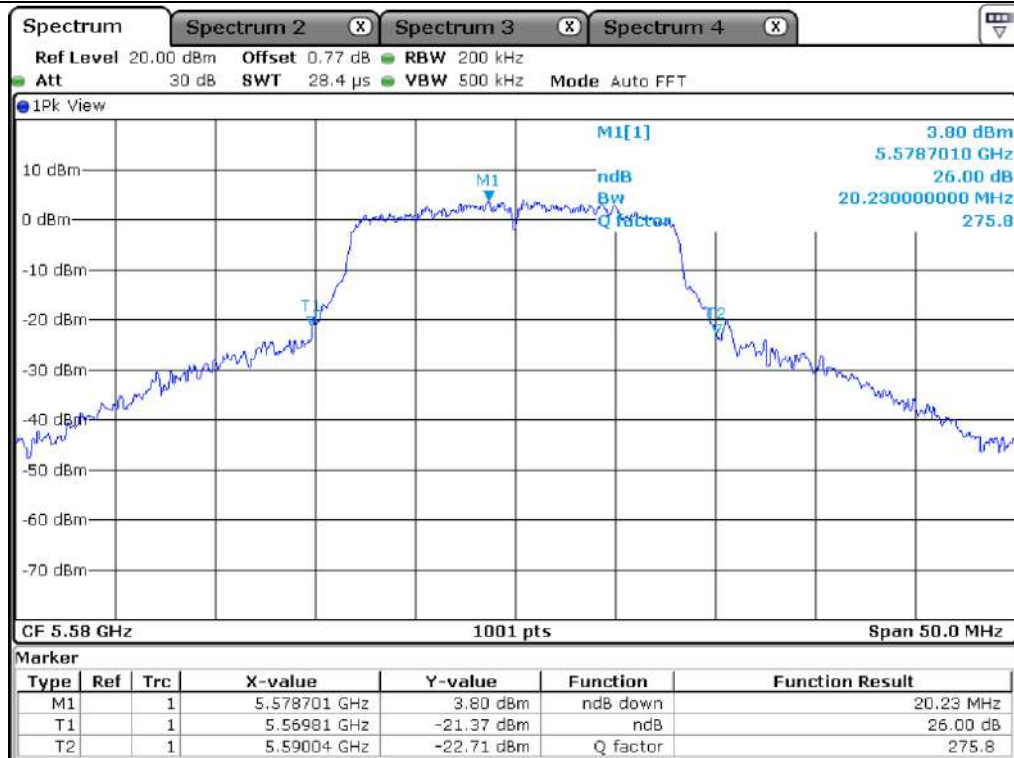


Middle Channel (5 580 MHz)

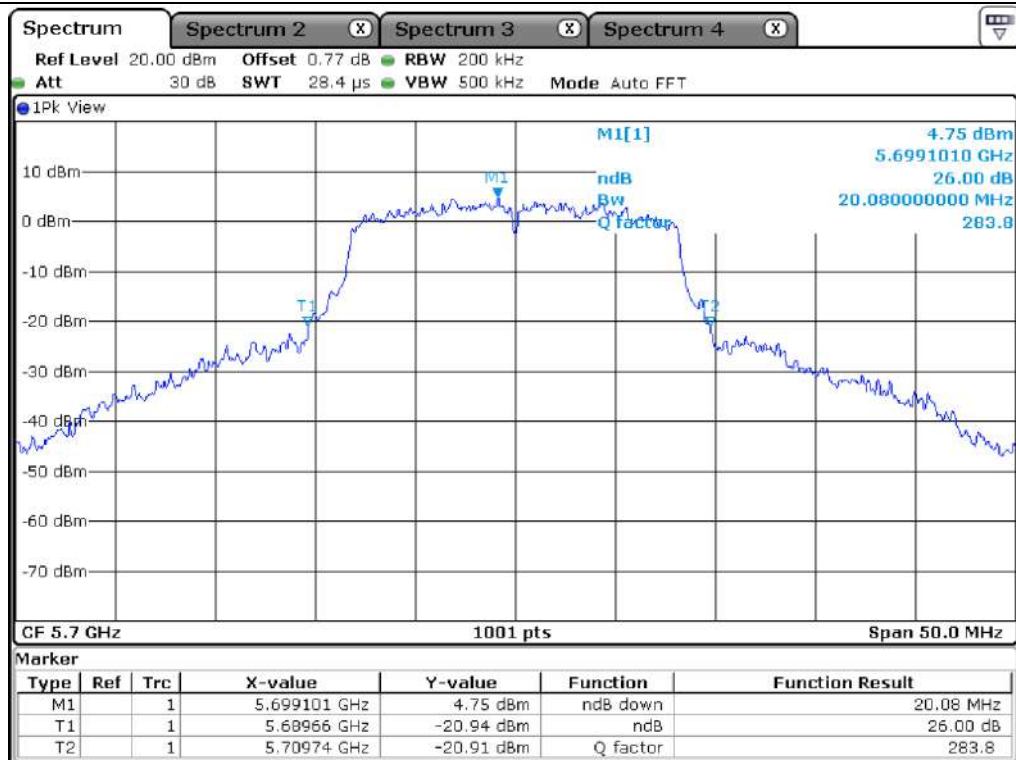

High Channel (5 700 MHz)

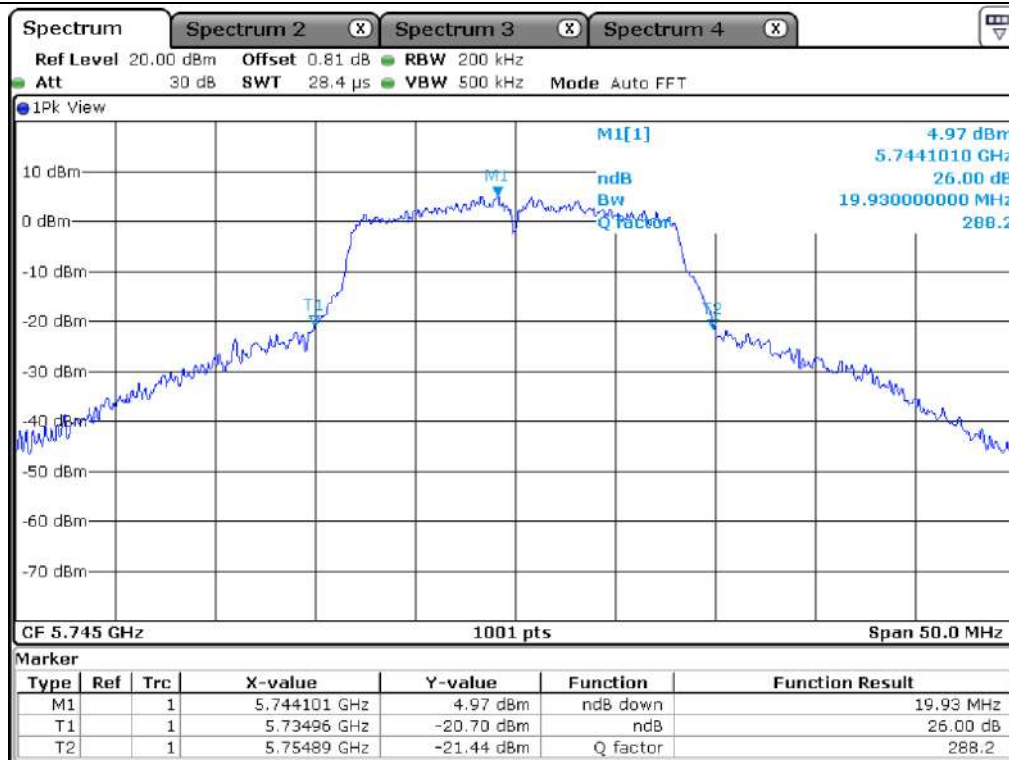

Low Channel (5 745 MHz)

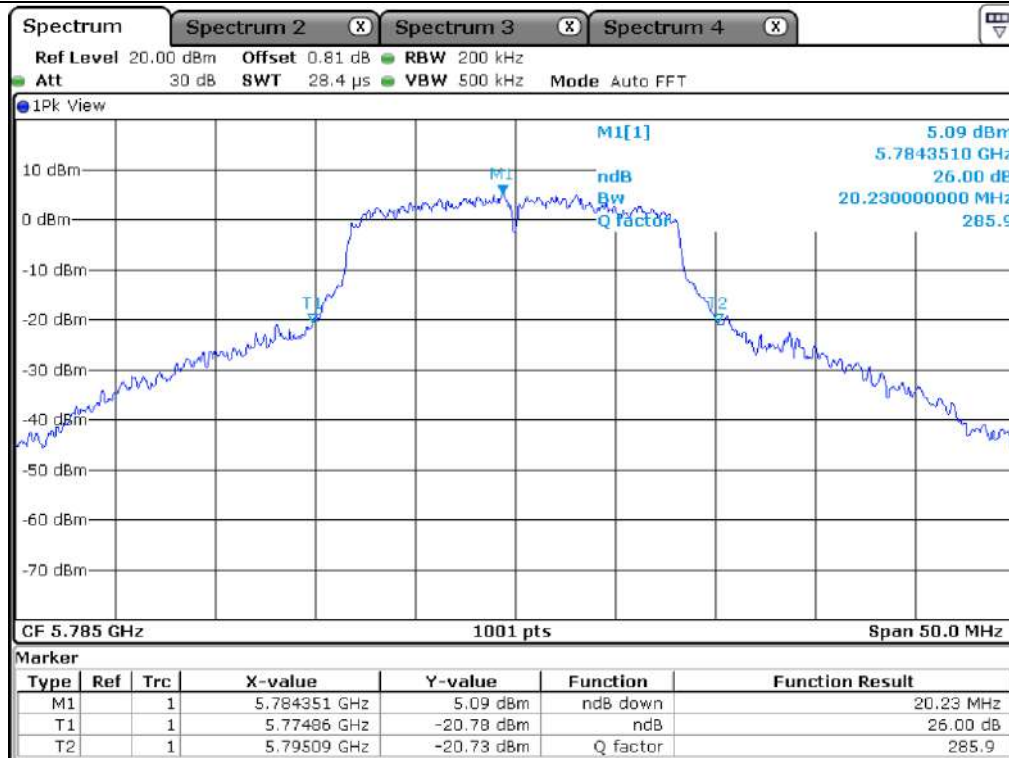


Middle Channel (5 785 MHz)

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

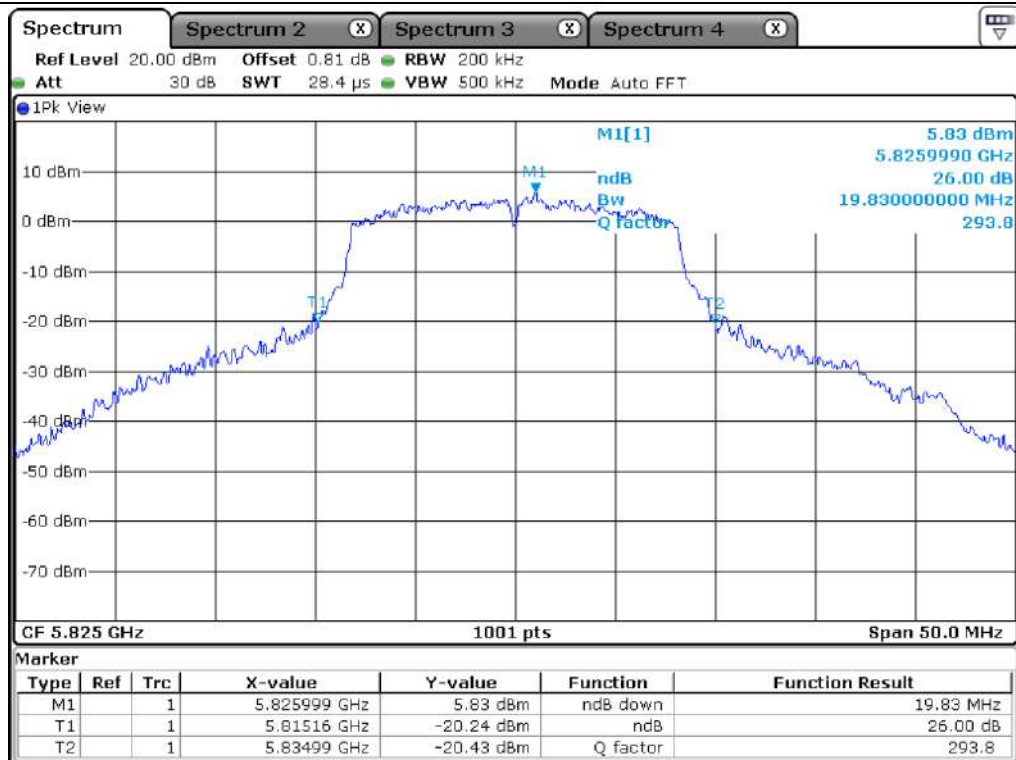


High Channel (5 825 MHz)

7.4.3 Test data for Staddle Channel_Antenna 0

-. Test Result : Pass


FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 720.00	14.84
5 725 ~ 5 850	5 720.00	4.74

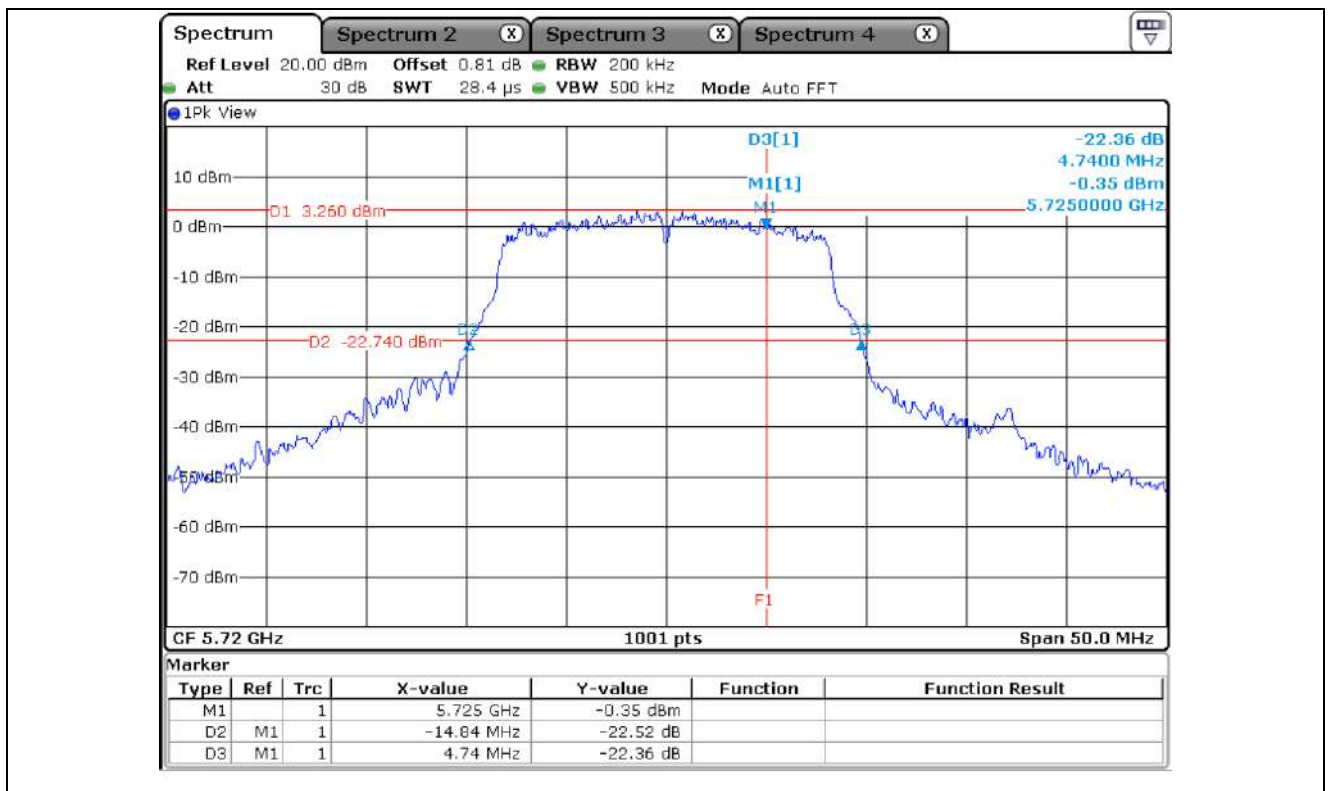

7.4.4 Test data for Staddle Channel_Antenna 1

-. Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 720.00	14.84
5 725 ~ 5 850	5 720.00	4.94

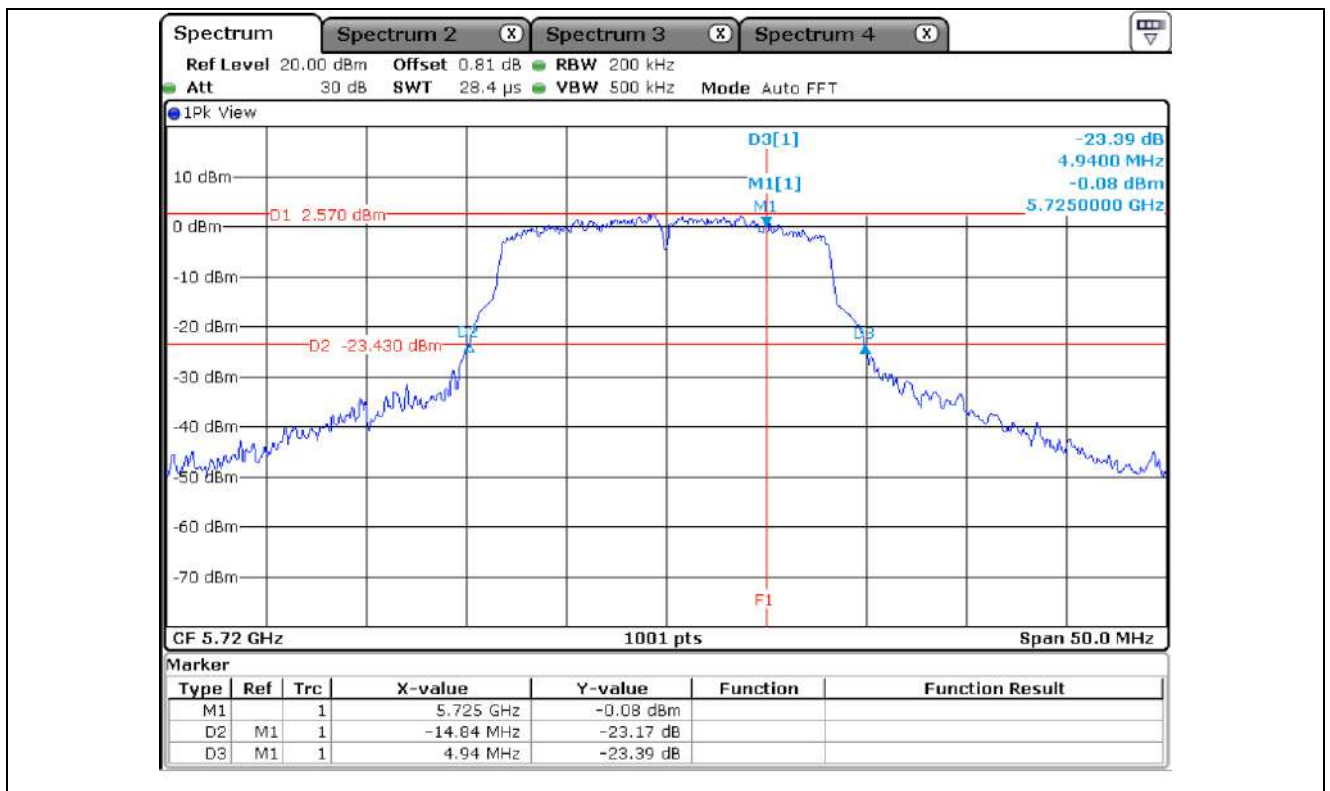


7.5 Test data for 802.11n_HT20 RLAN Mode

7.5.1 Test data for Antenna 0


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	20.18
	Middle	5 220.00	19.98
	High	5 240.00	20.28
5 250 ~ 5 350	Low	5 260.00	20.13
	Middle	5 300.00	20.23
	High	5 320.00	19.98
5 470 ~ 5 725	Low	5 500.00	20.13
	Middle	5 580.00	20.13
	High	5 700.00	20.13
5 725 ~ 5 850	Low	5 745.00	20.08
	Middle	5 785.00	20.18
	High	5 825.00	20.08


Remark: See next page for measurement data.

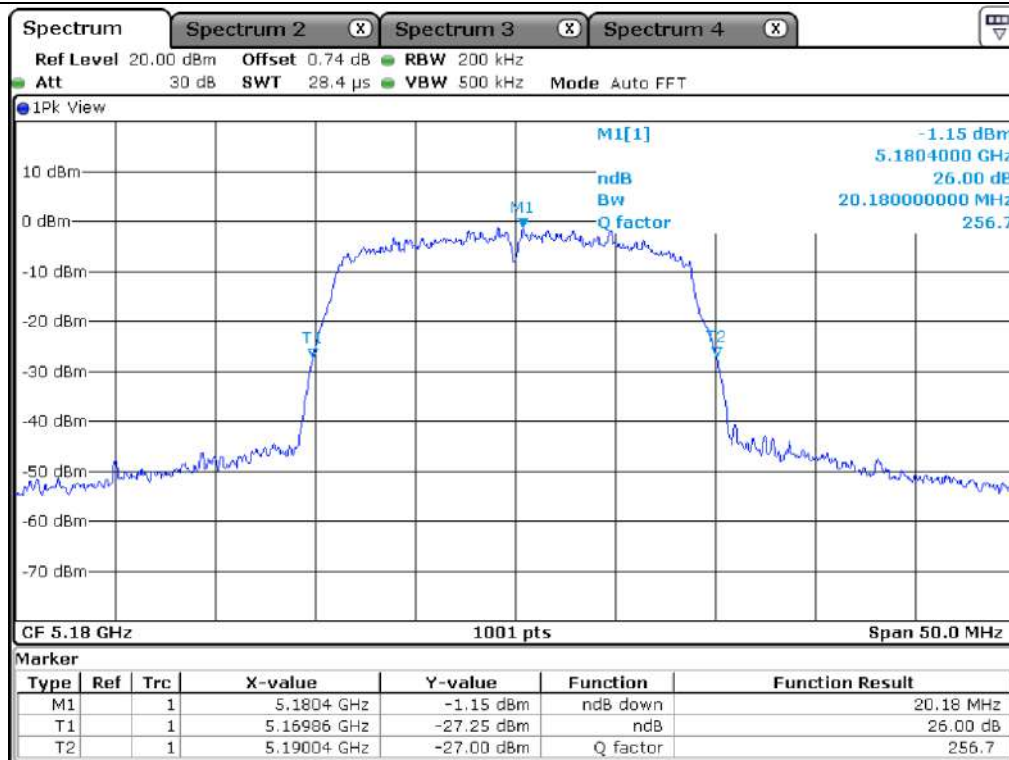


Low Channel (5 180 MHz)

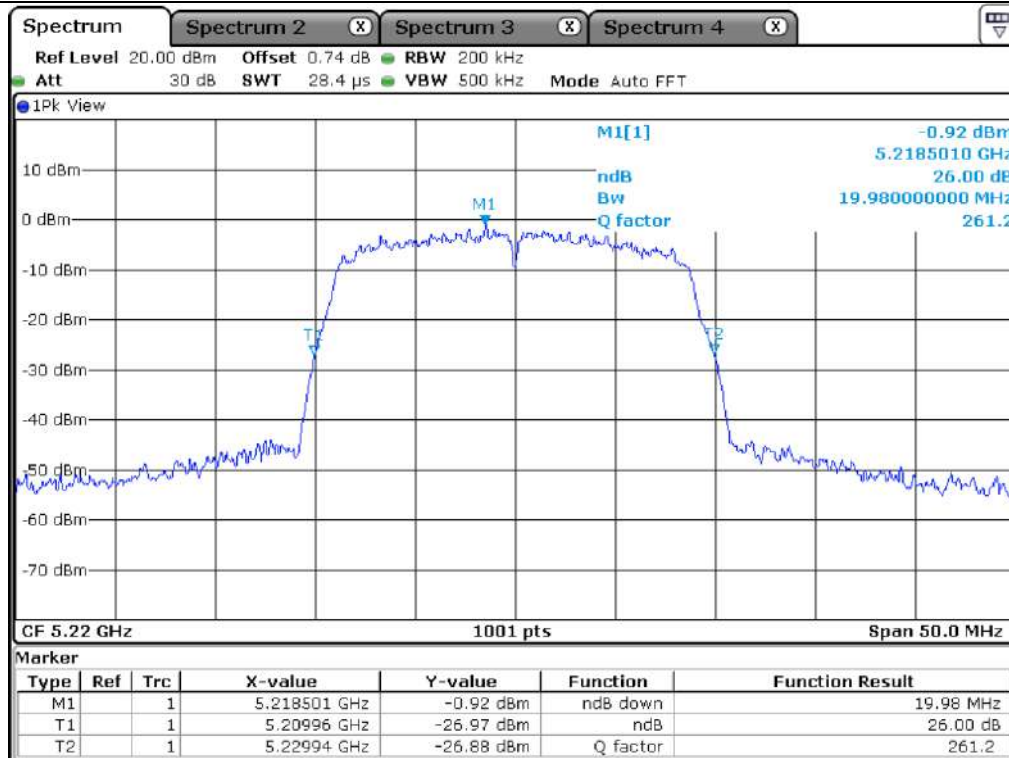


Middle Channel (5 220 MHz)

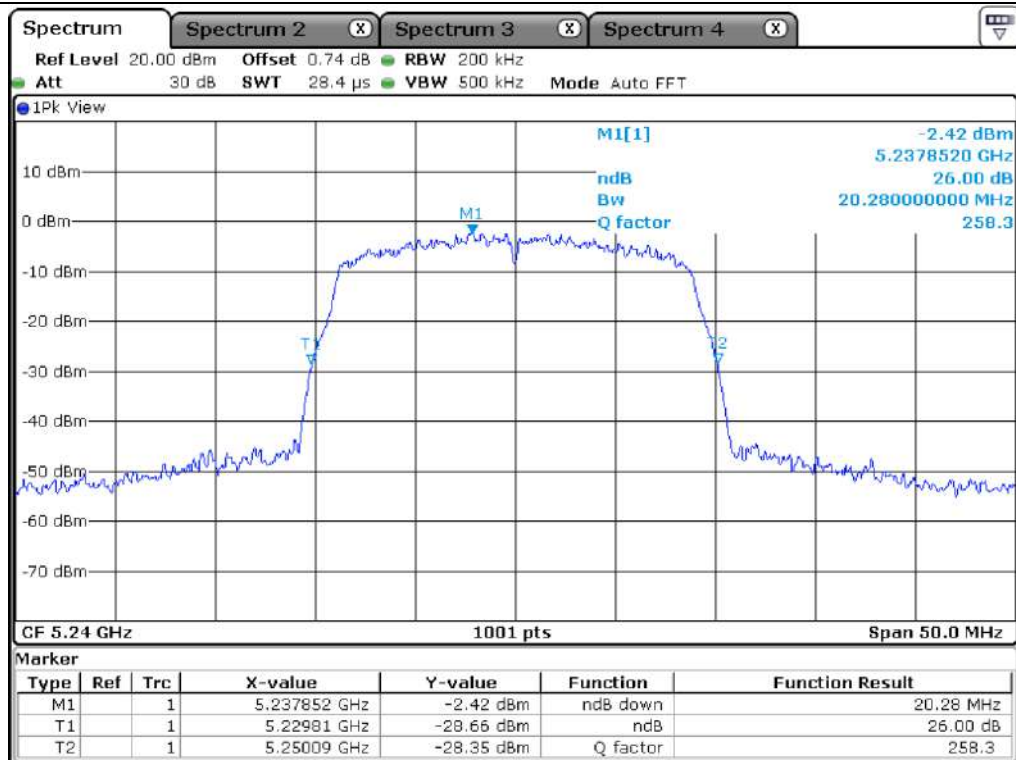

High Channel (5 240 MHz)

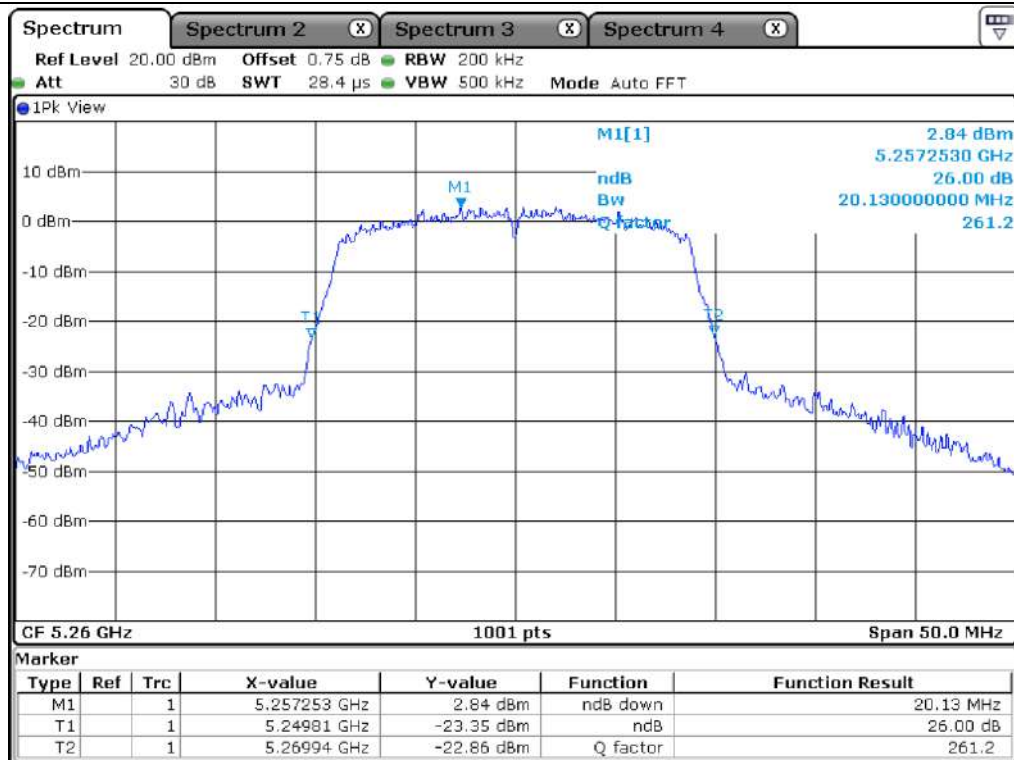

Low Channel (5 260 MHz)

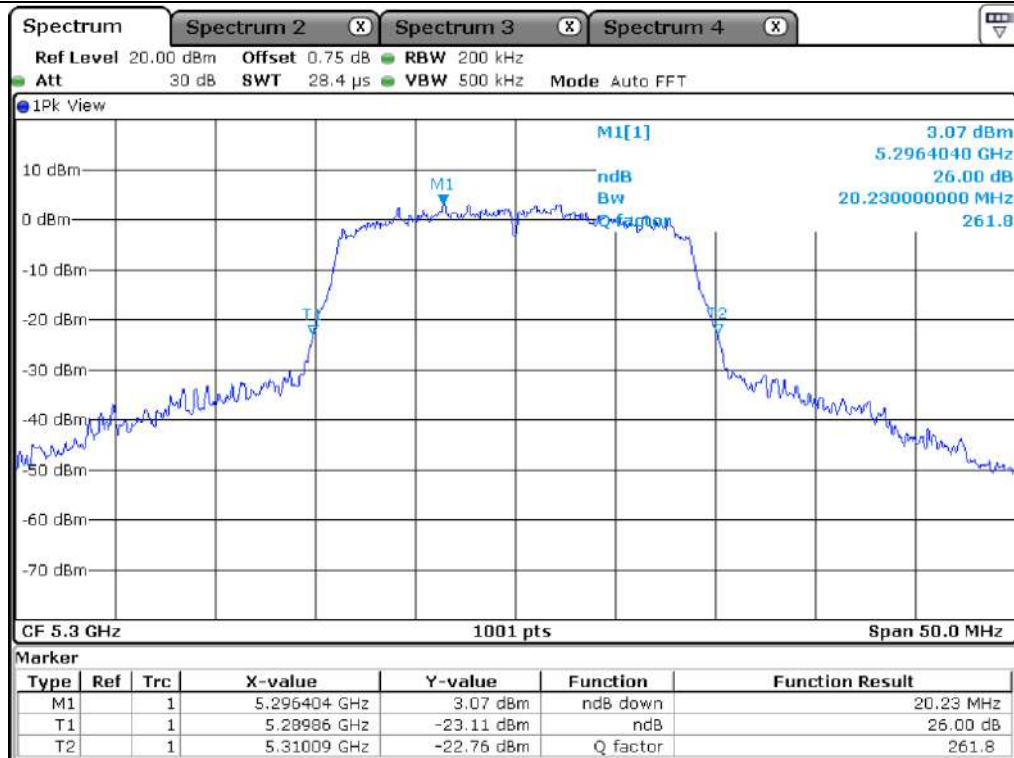


Middle Channel (5 300 MHz)

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

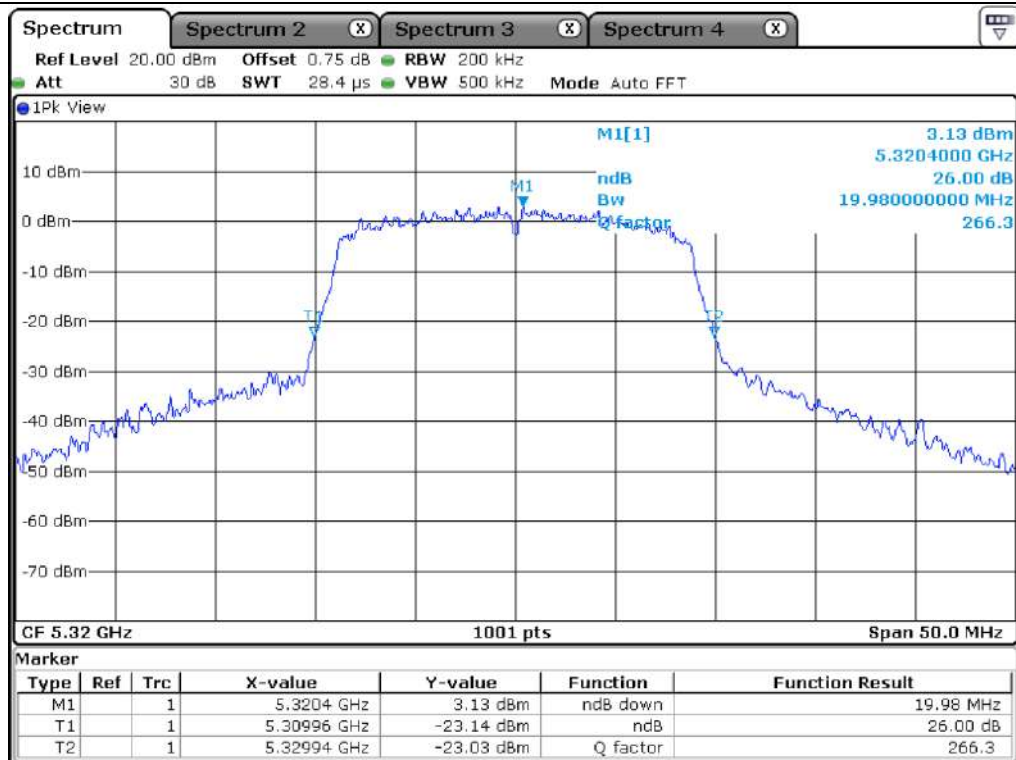

High Channel (5 320 MHz)

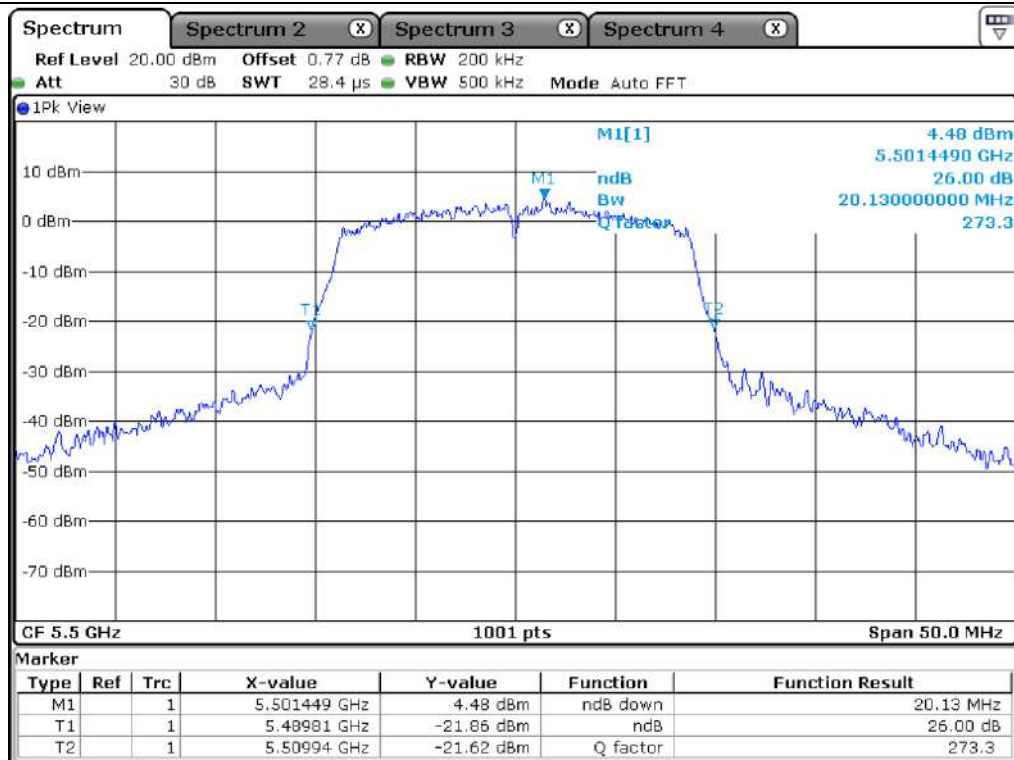

Low Channel (5 500 MHz)

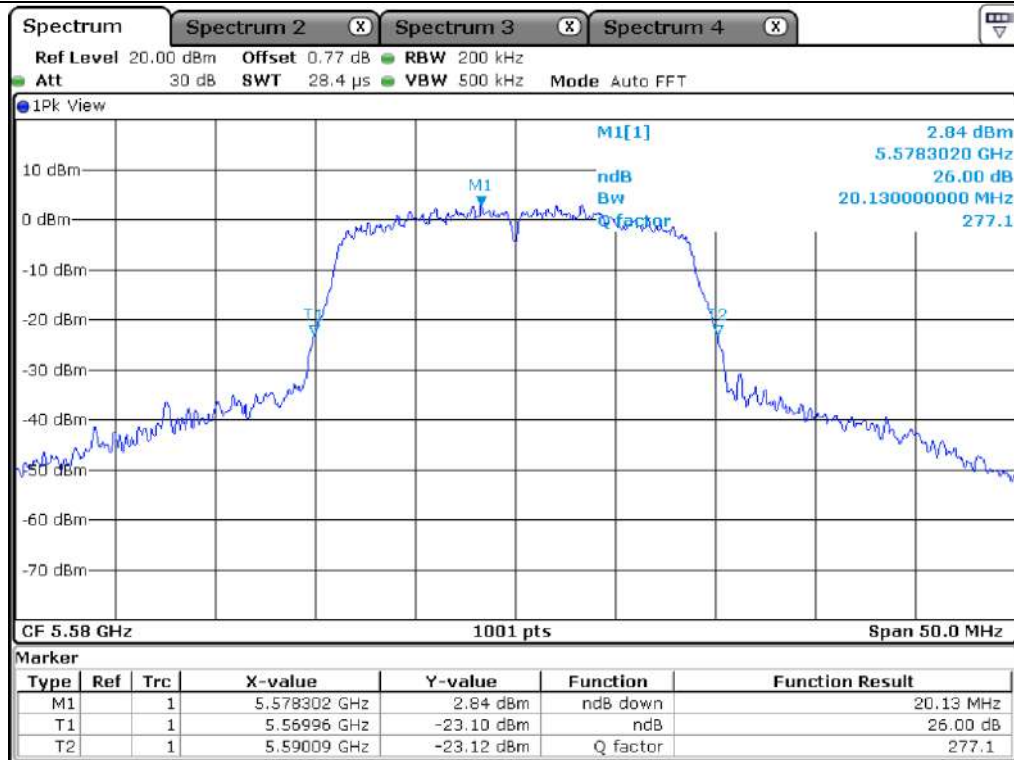


Middle Channel (5 580 MHz)

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

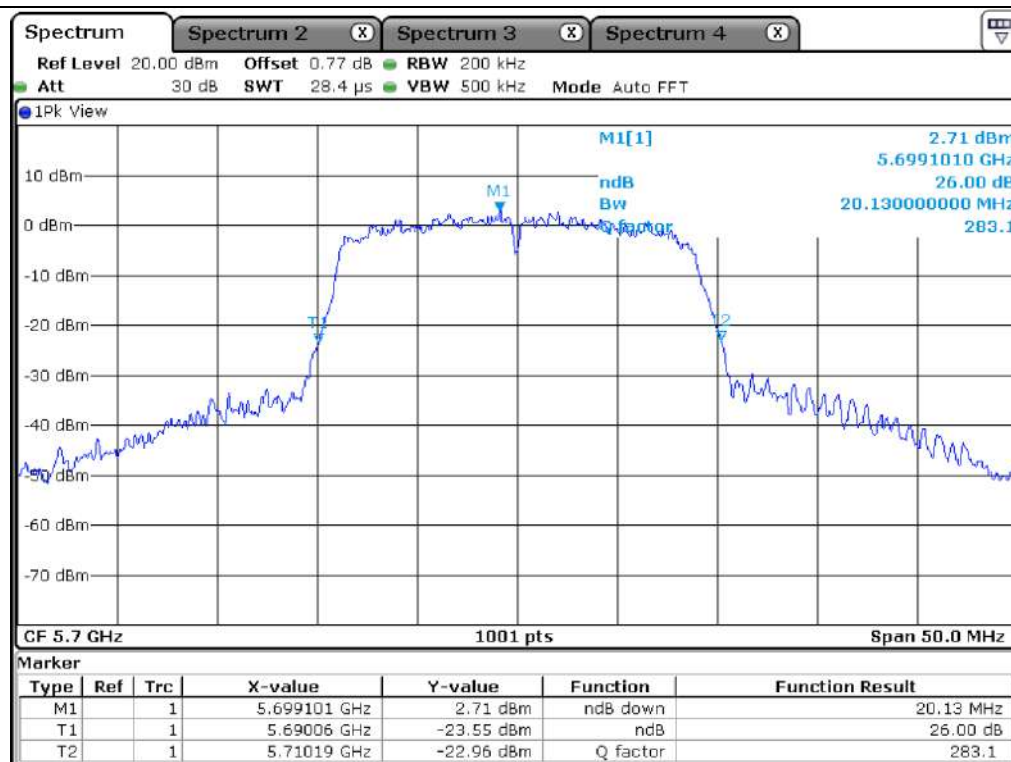

High Channel (5 700 MHz)

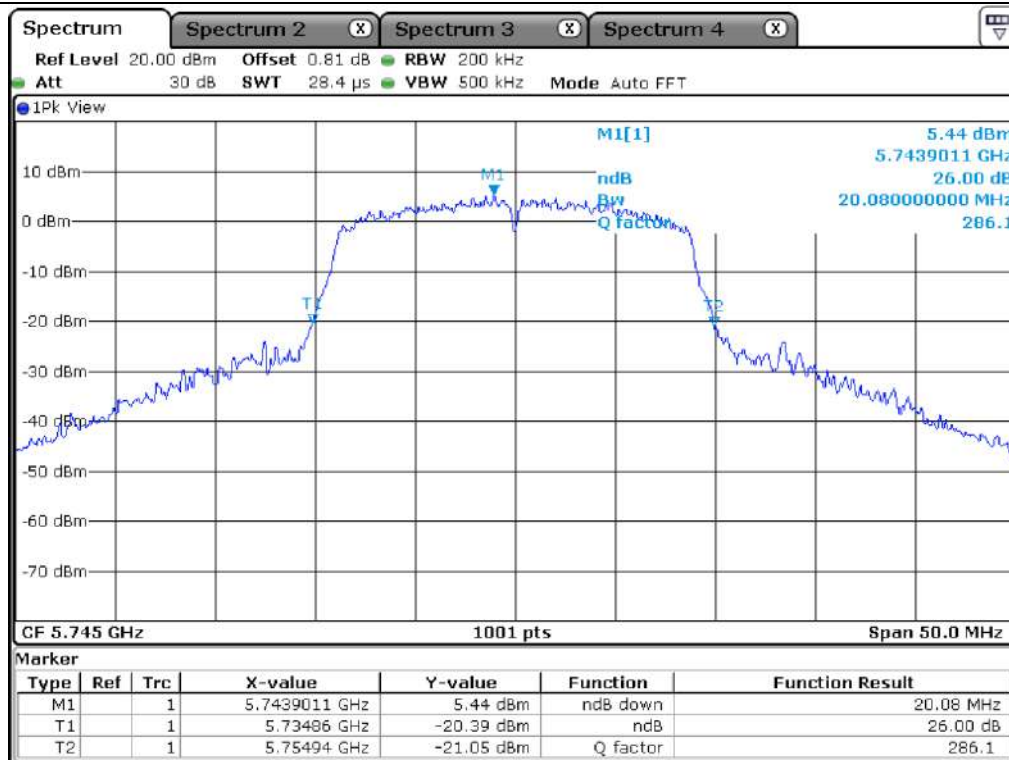

Low Channel (5 745 MHz)

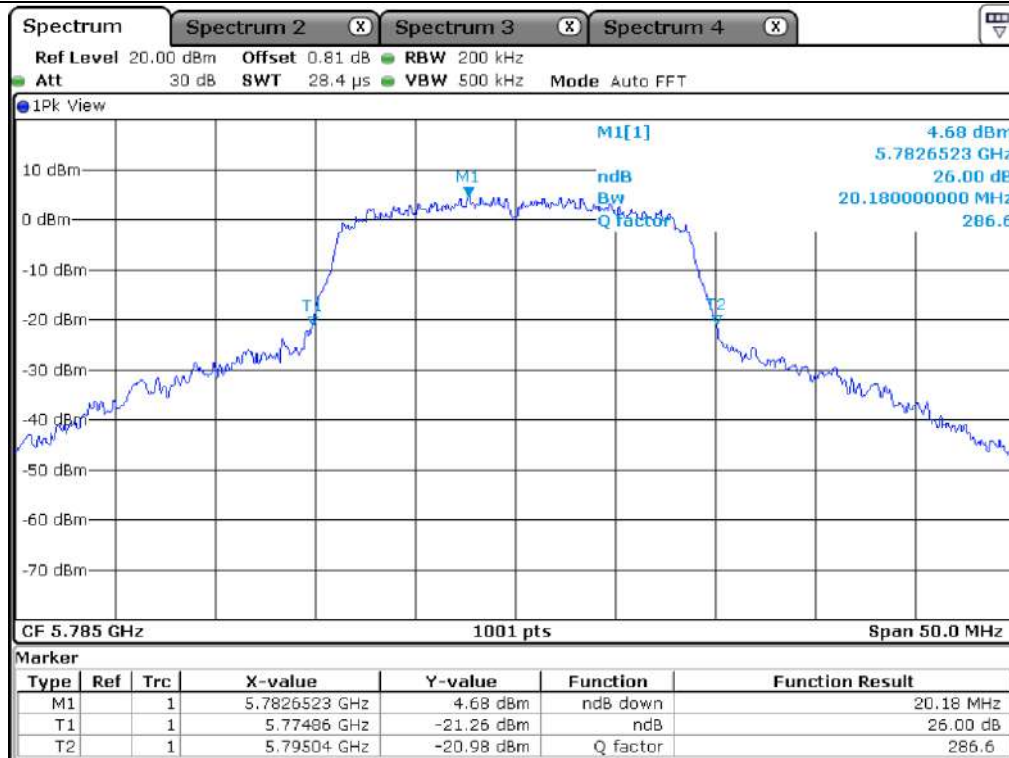


Middle Channel (5 785 MHz)

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

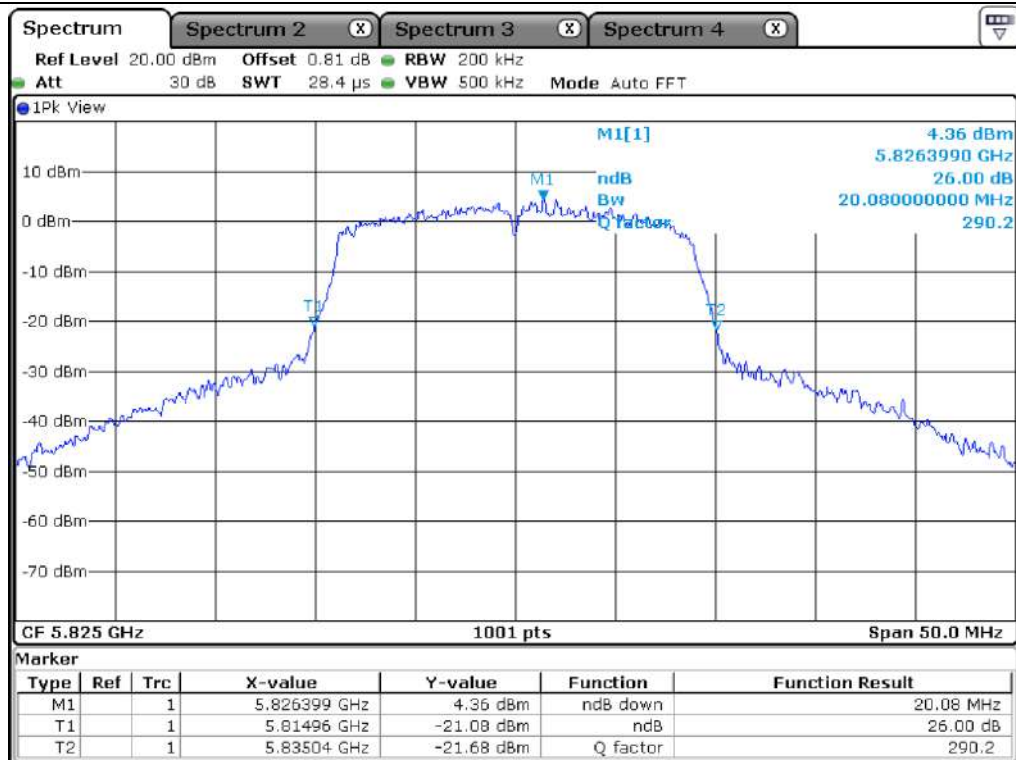


High Channel (5 825 MHz)

7.5.2 Test data for Antenna 1


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	20.18
	Middle	5 220.00	20.08
	High	5 240.00	19.98
5 250 ~ 5 350	Low	5 260.00	20.18
	Middle	5 300.00	20.23
	High	5 320.00	20.23
5 470 ~ 5 725	Low	5 500.00	20.43
	Middle	5 580.00	20.08
	High	5 700.00	20.33
5 725 ~ 5 850	Low	5 745.00	20.48
	Middle	5 785.00	20.28
	High	5 825.00	20.48


Remark: See next page for measurement data.

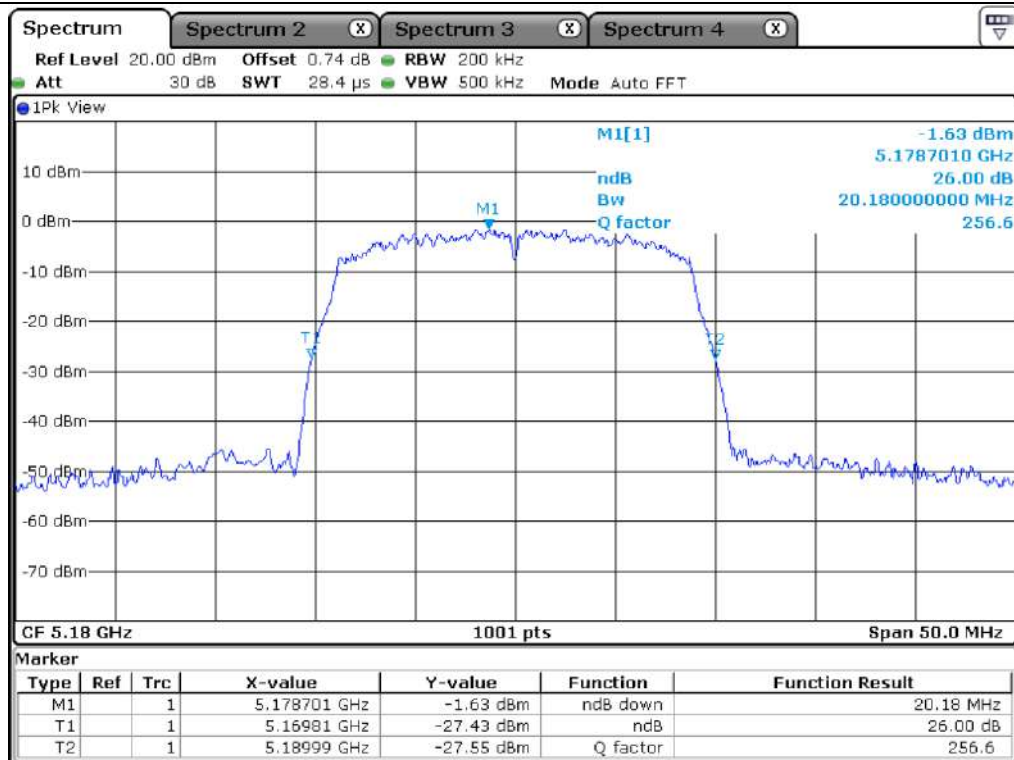


Low Channel (5 180 MHz)

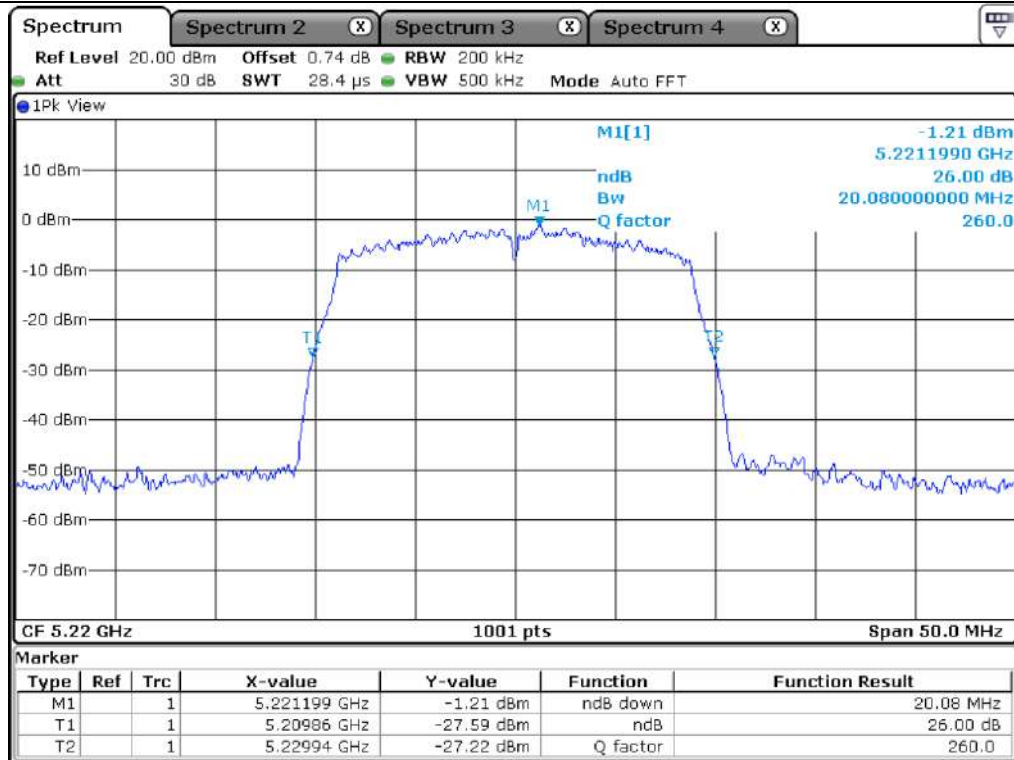


Middle Channel (5 220 MHz)

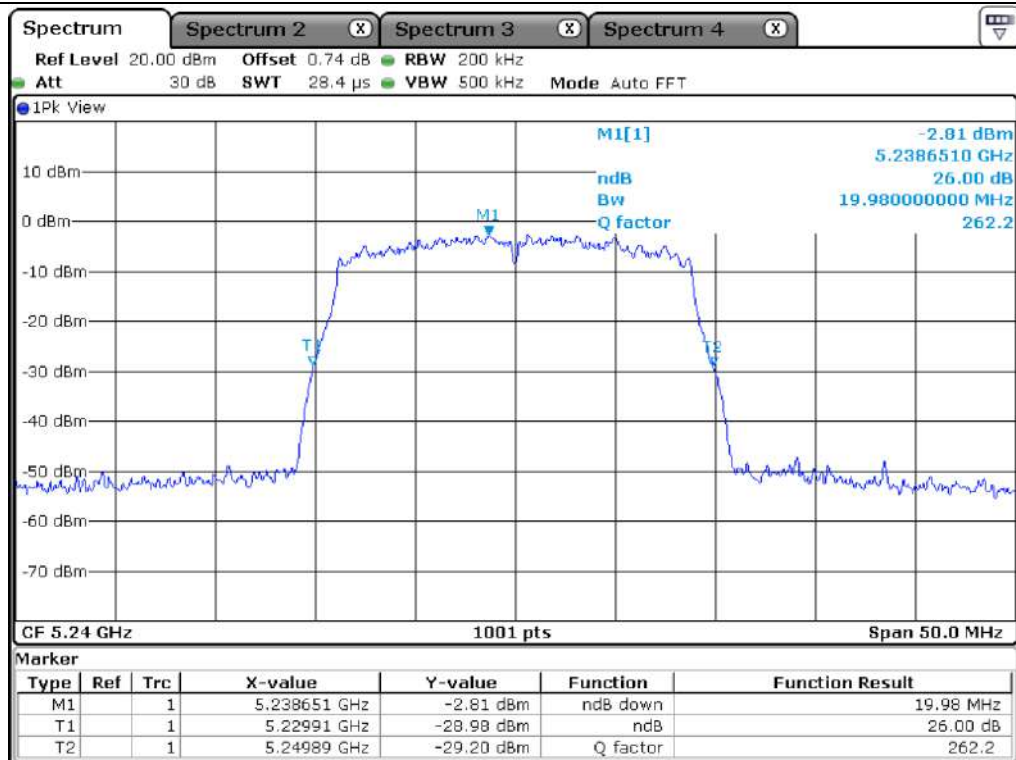


High Channel (5 240 MHz)

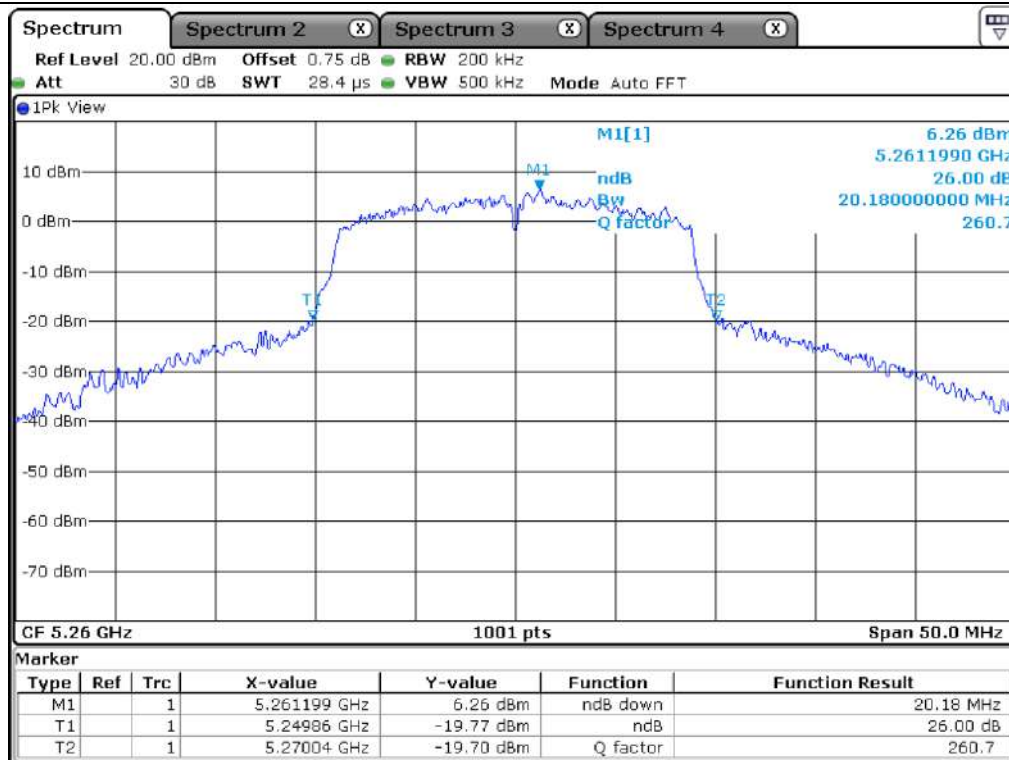


Low Channel (5 260 MHz)

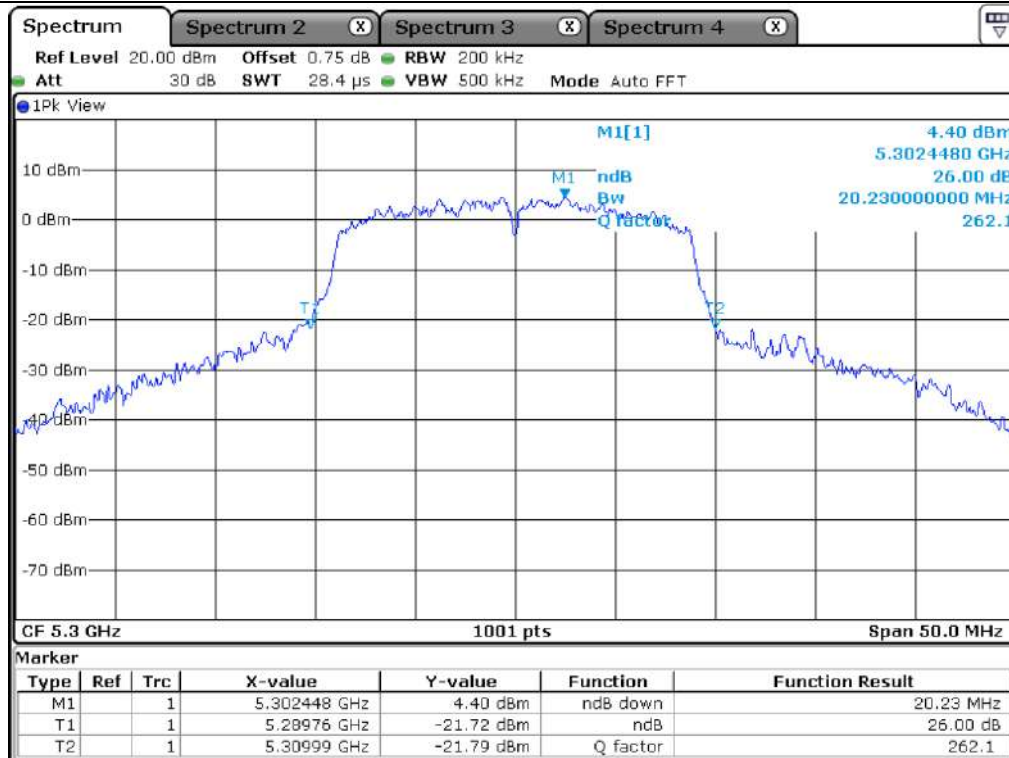


Middle Channel (5 300 MHz)

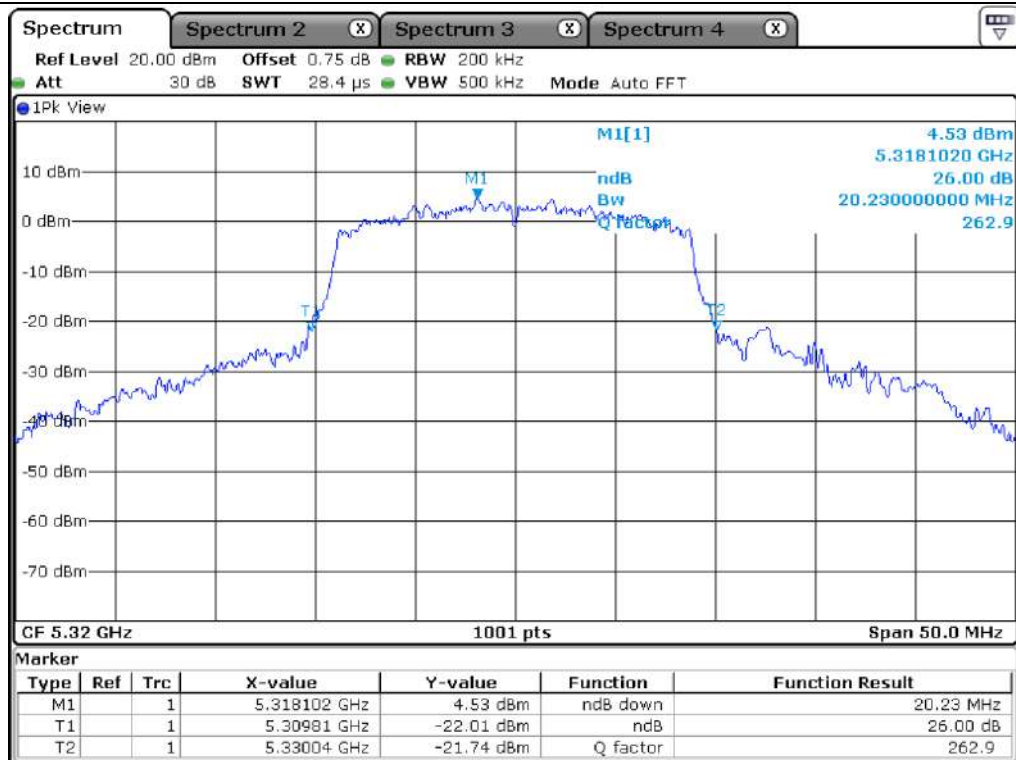

High Channel (5 320 MHz)

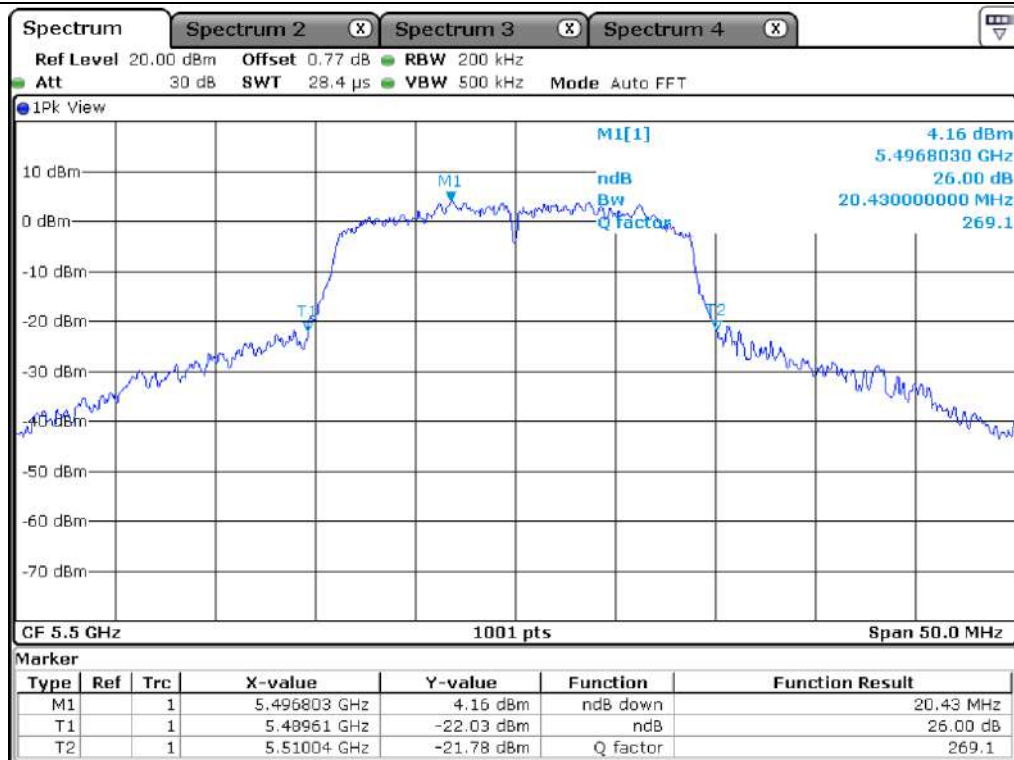

Low Channel (5 500 MHz)

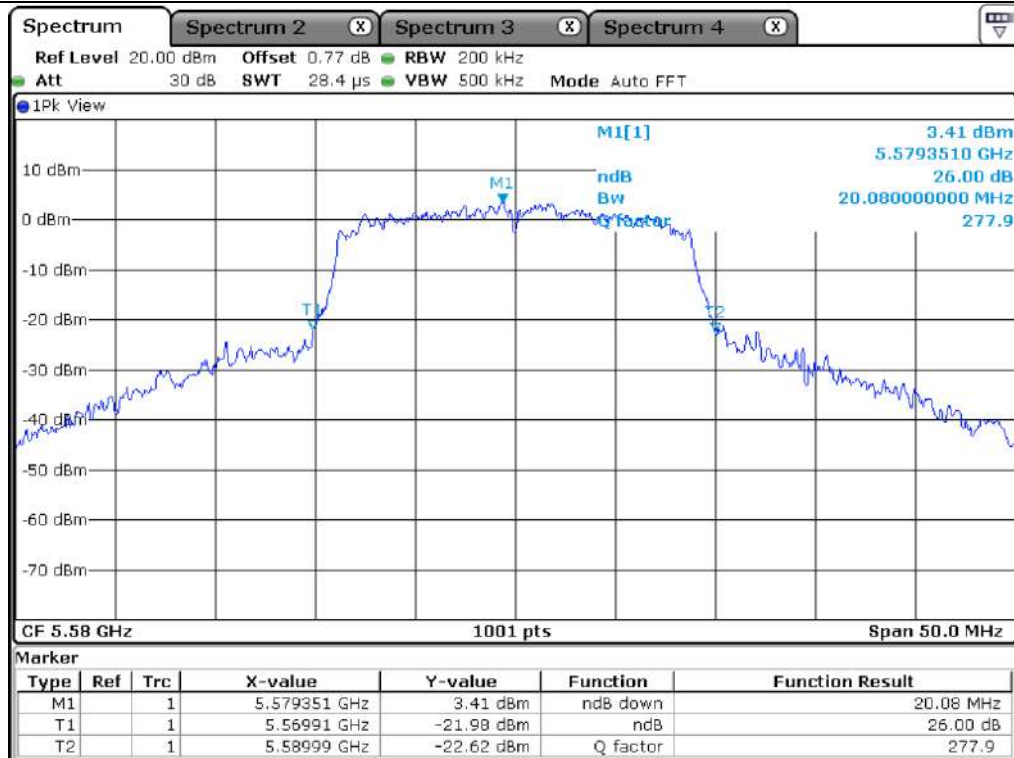


Middle Channel (5 580 MHz)

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

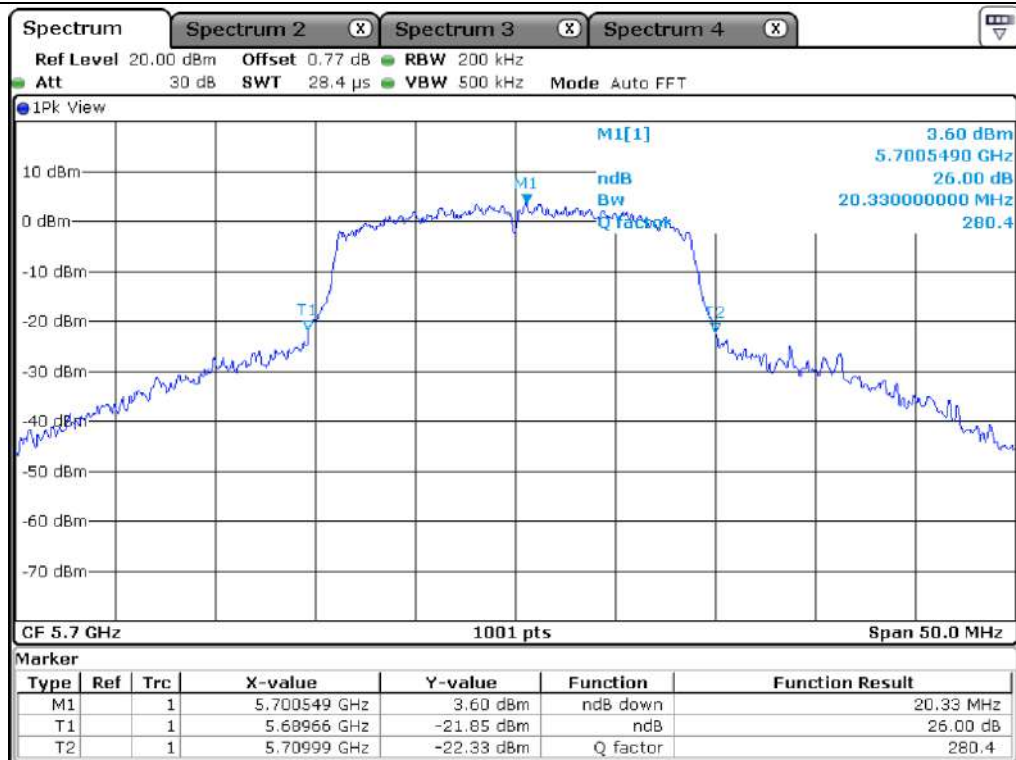

High Channel (5 700 MHz)

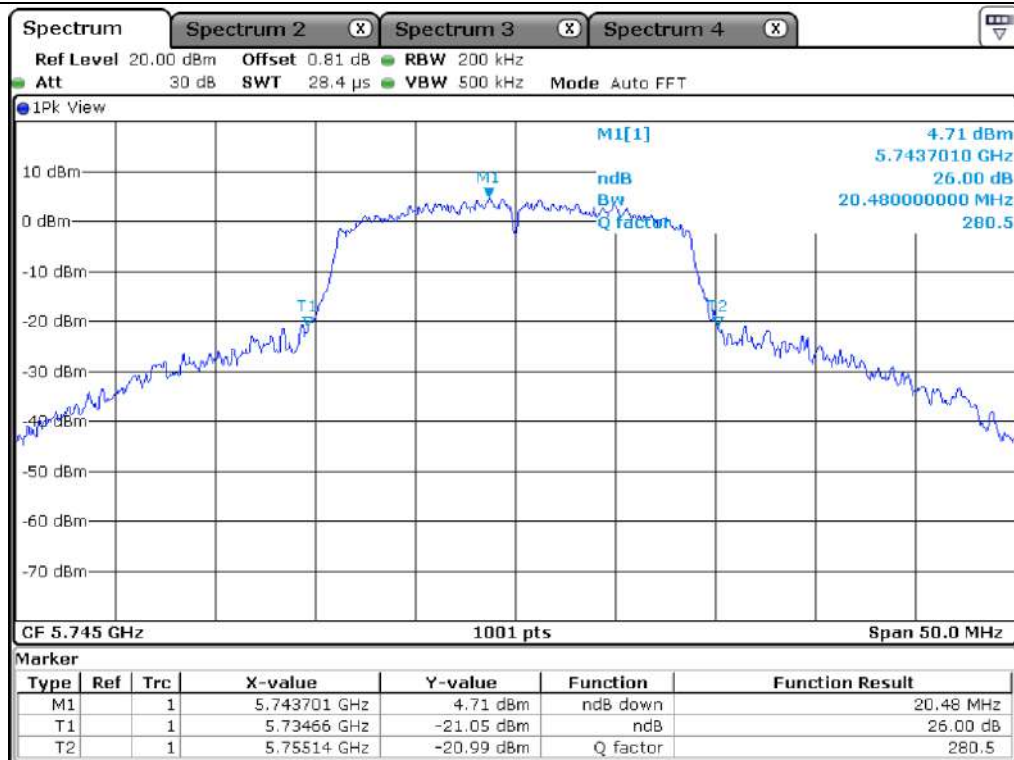

Low Channel (5 745 MHz)

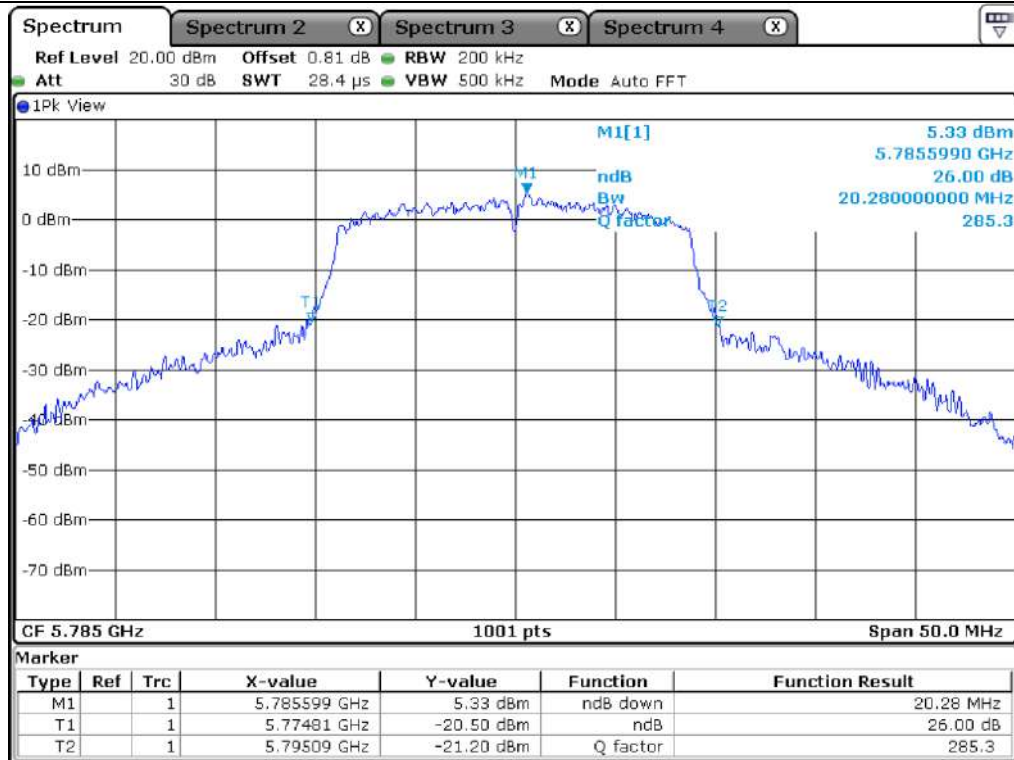


Middle Channel (5 785 MHz)

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

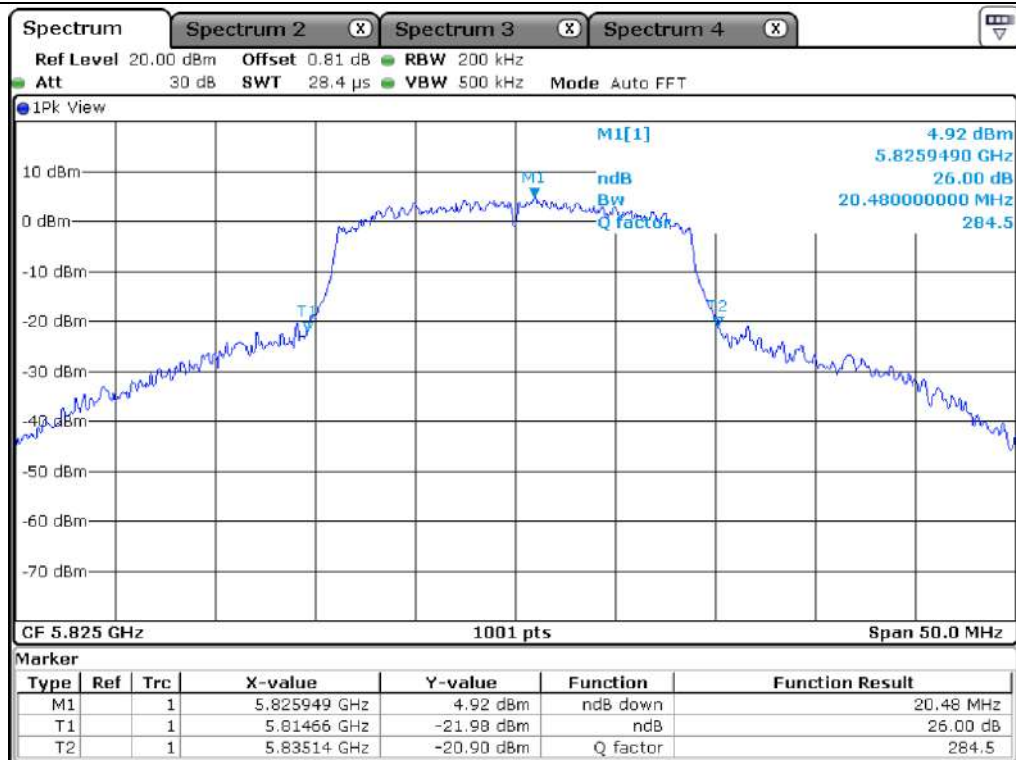


High Channel (5 825 MHz)

7.4.3 Test data for Staddle Channel_Antenna 0

-. Test Result : Pass


FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 720.00	15.09
5 725 ~ 5 850	5 720.00	5.04

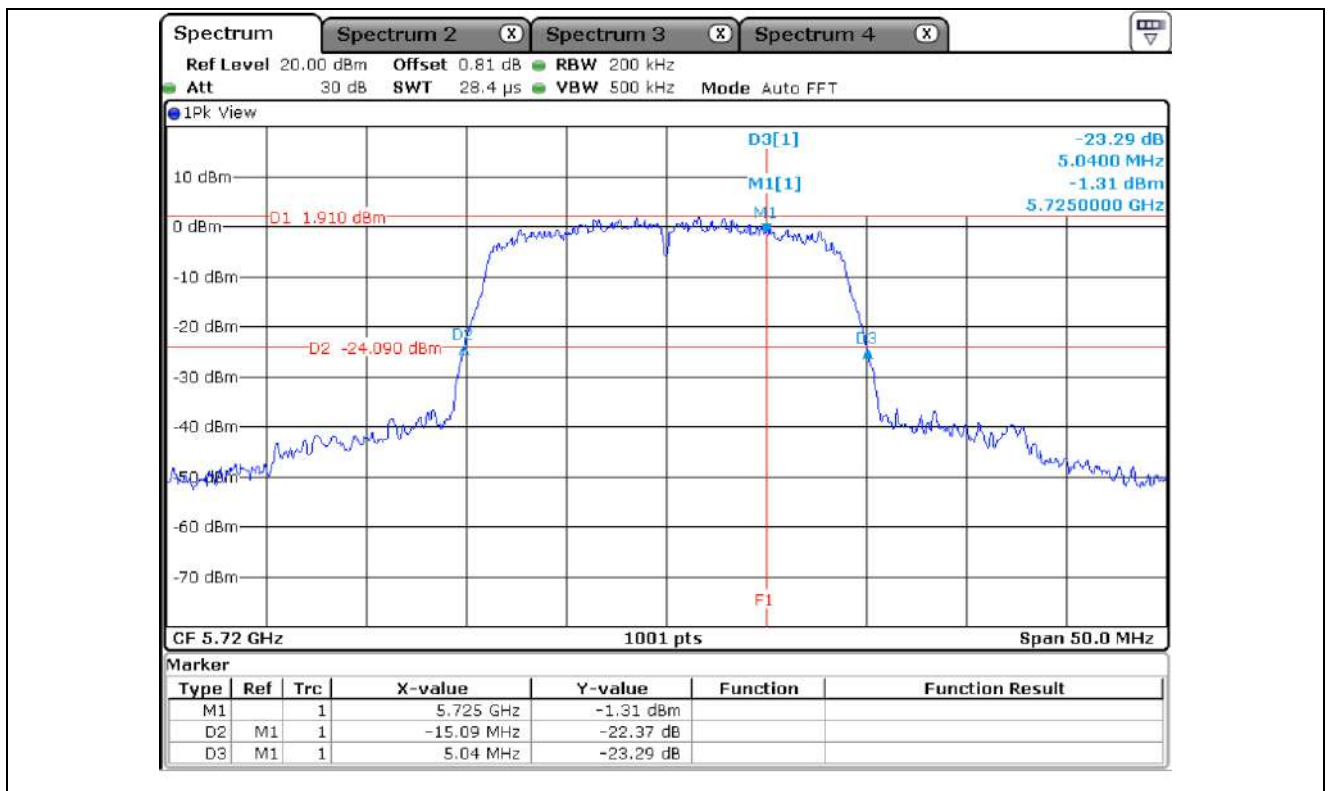

7.4.4 Test data for Staddle Channel_Antenna 1

-. Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 720.00	14.84
5 725 ~ 5 850	5 720.00	4.84

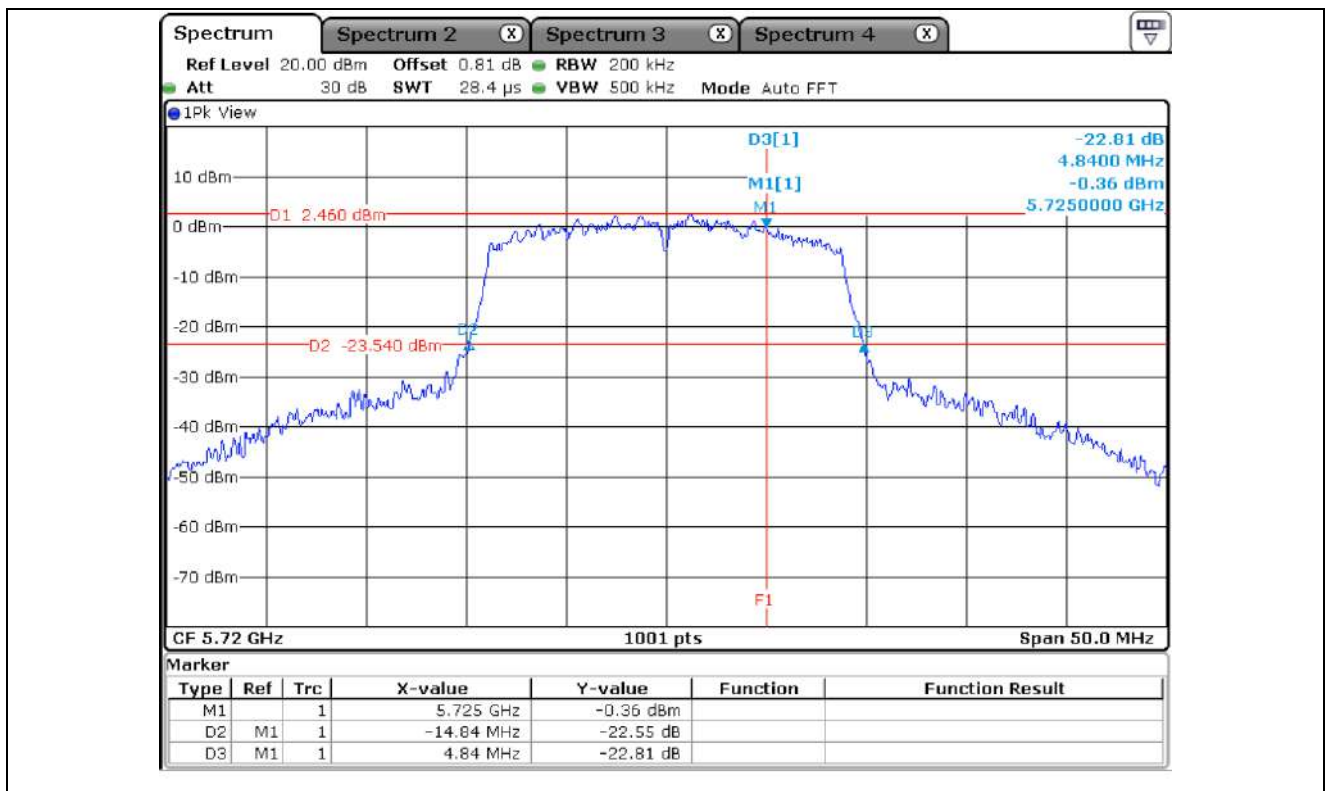


7.6 Test data for 802.11n_HT40 RLAN Mode

7.6.1 Test data for Antenna 0


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 190.00	40.06
	High	5 230.00	40.46
5 250 ~ 5 350	Low	5 270.00	40.66
	High	5 310.00	39.96
5 470 ~ 5 725	Low	5 510.00	40.86
	Middle	5 550.00	40.86
	High	5 670.00	40.36
5 725 ~ 5 850	Low	5 755.00	40.36
	High	5 795.00	40.76

Remark: See next page for measurement data.

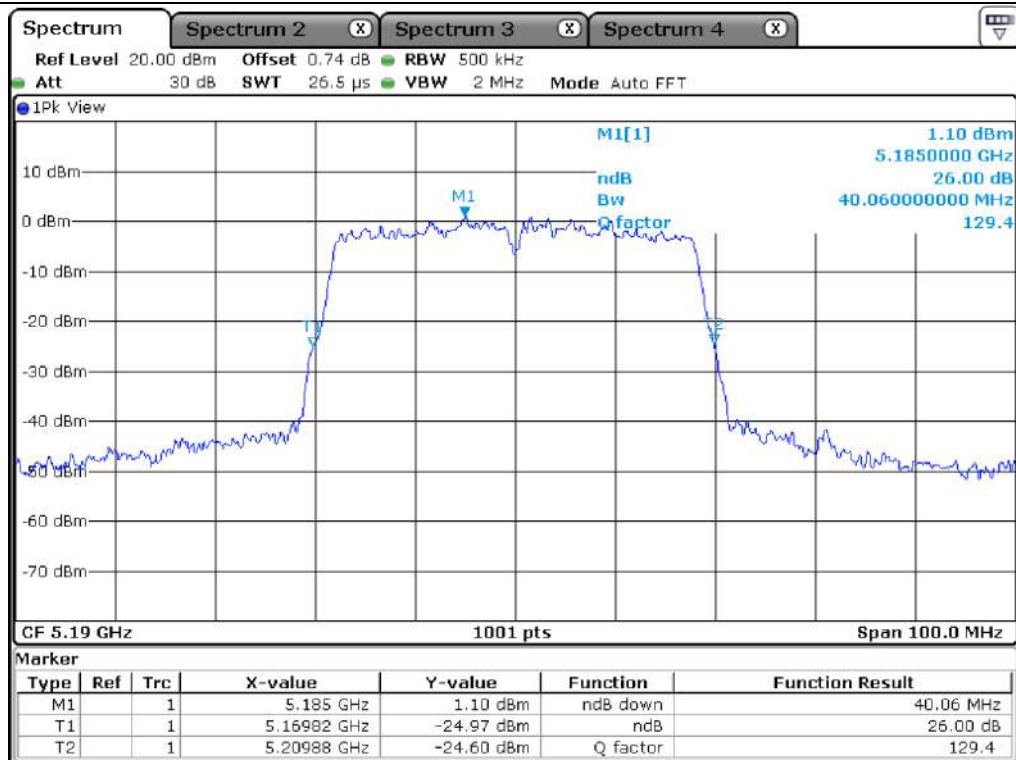

Low Channel (5 190 MHz)

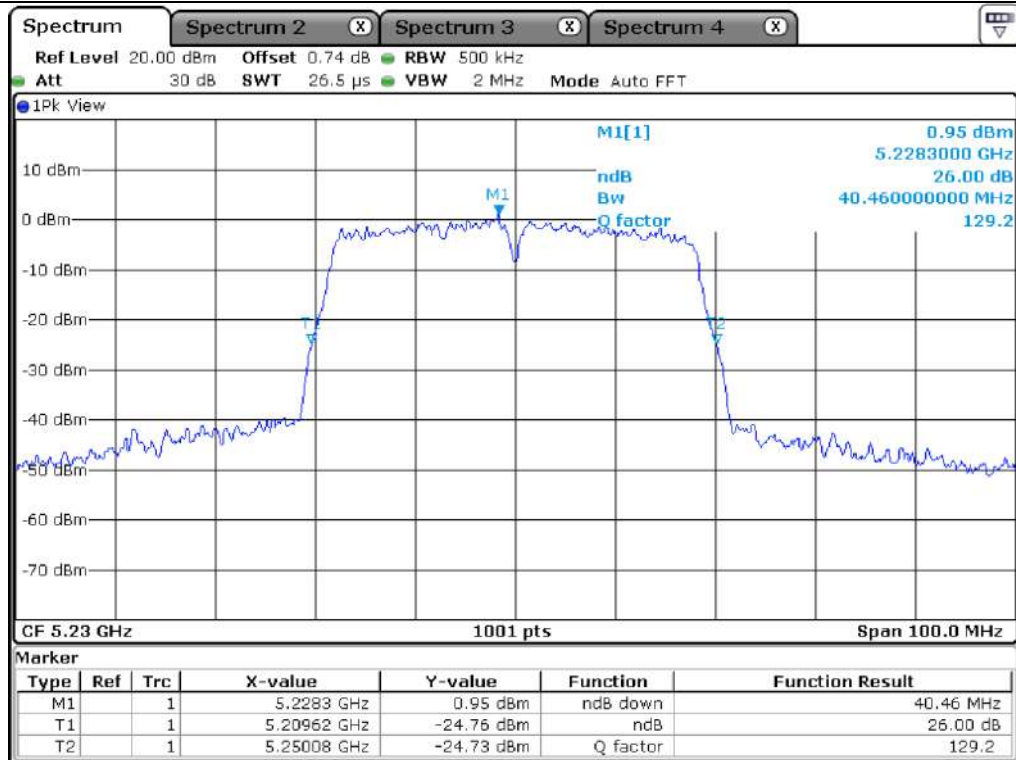


High Channel (5 230 MHz)

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

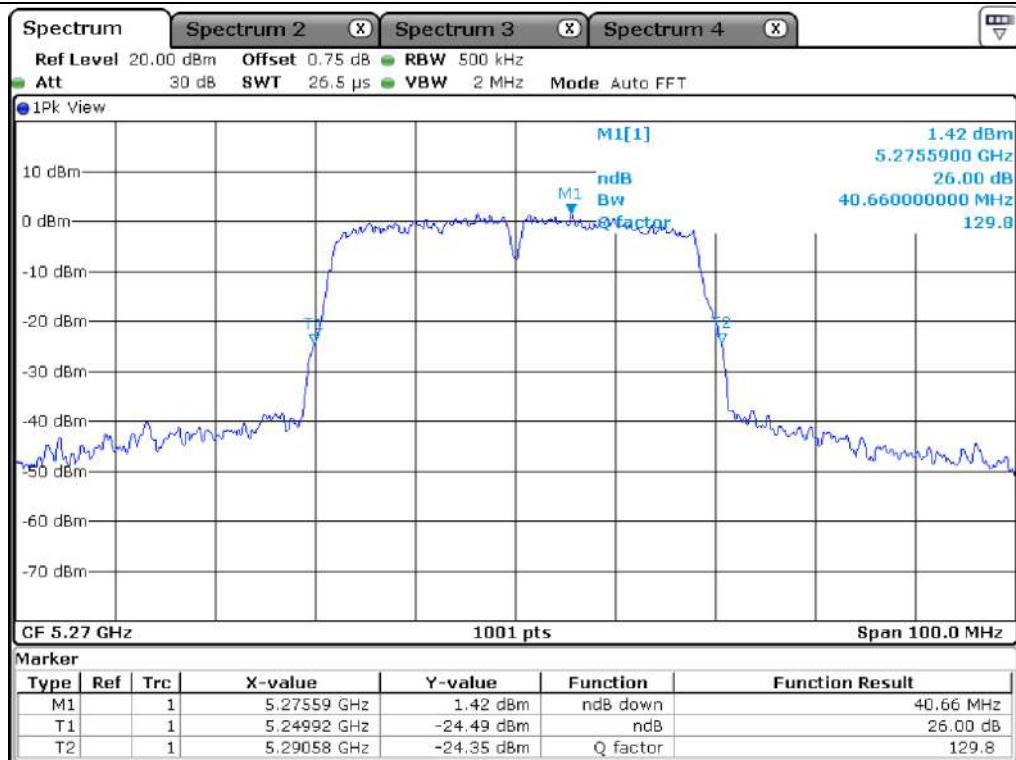


Low Channel (5 270 MHz)

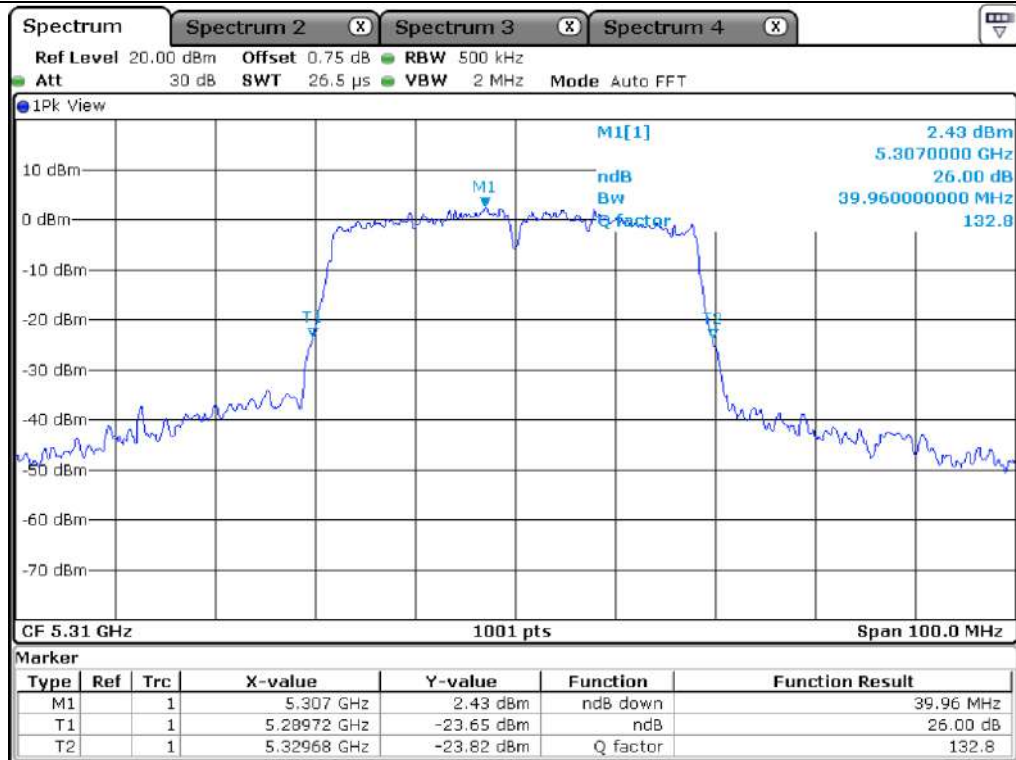


High Channel (5 310 MHz)

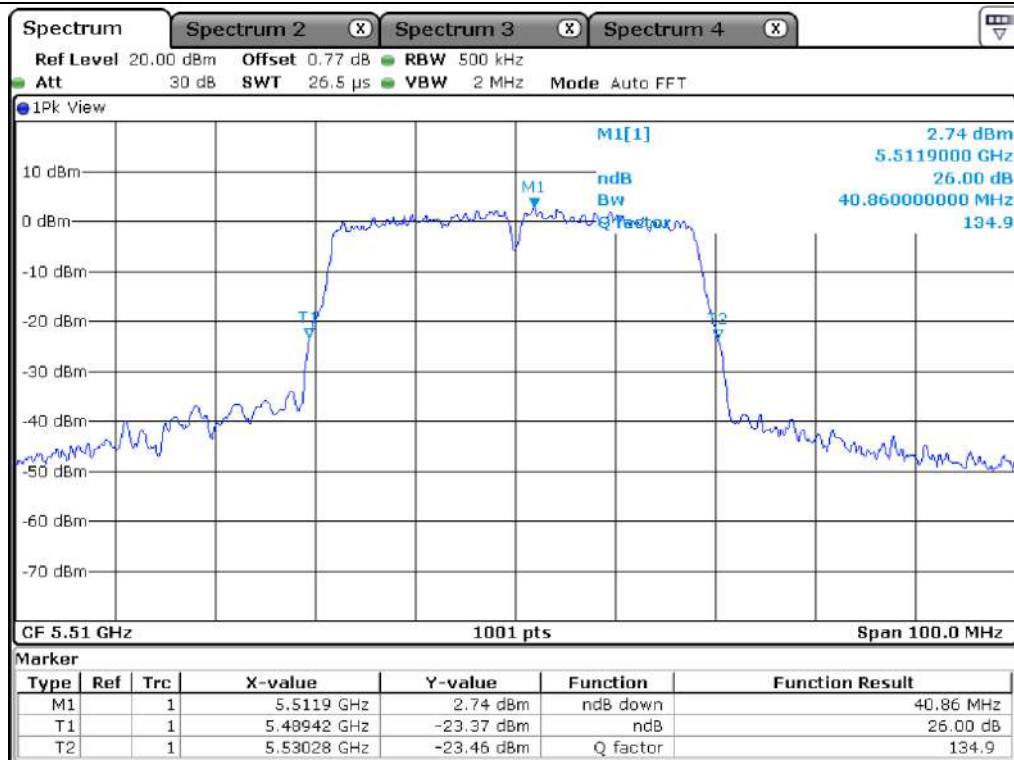


Low Channel (5 510 MHz)

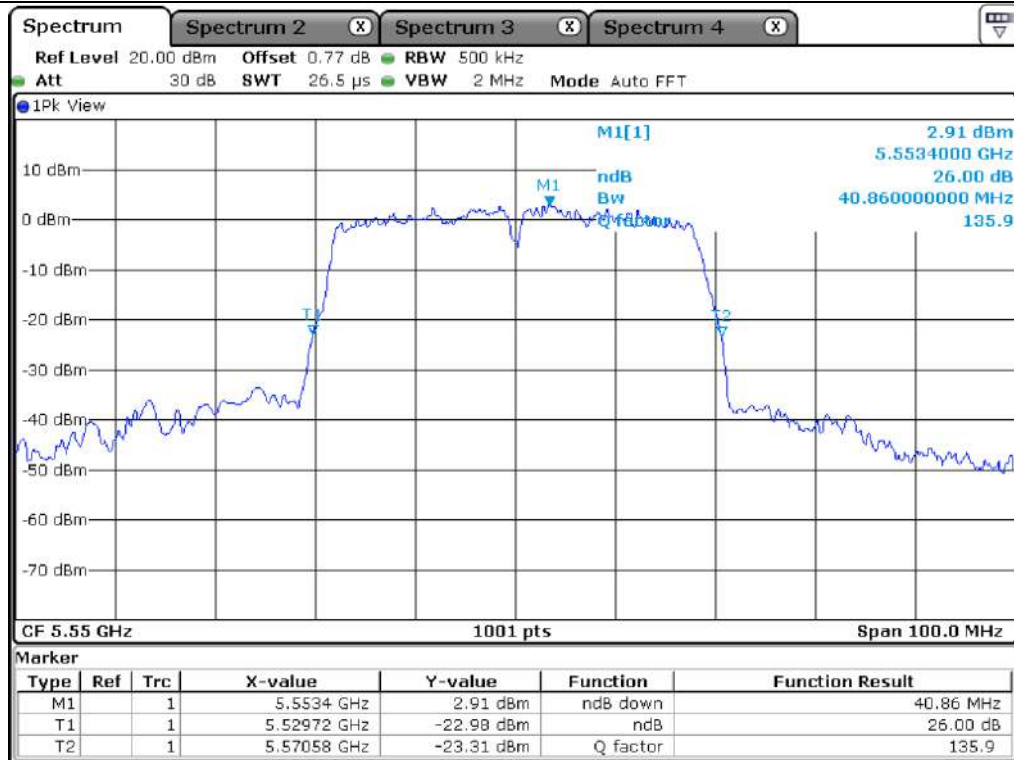


Middle Channel (5 550 MHz)

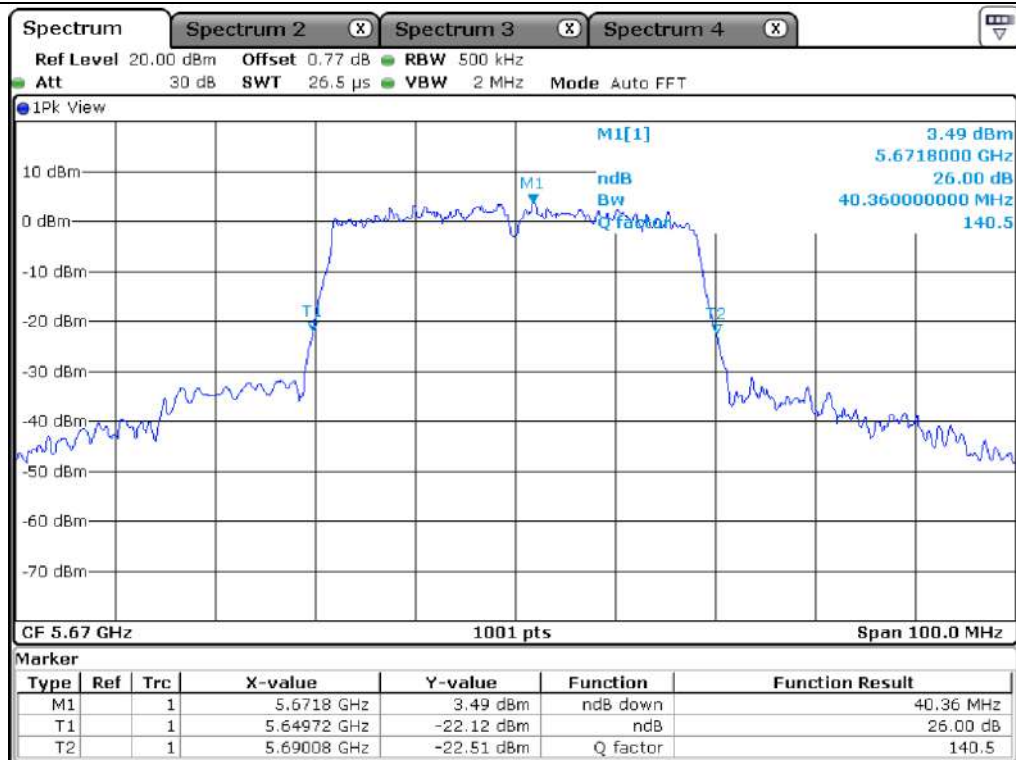

High Channel (5 670 MHz)

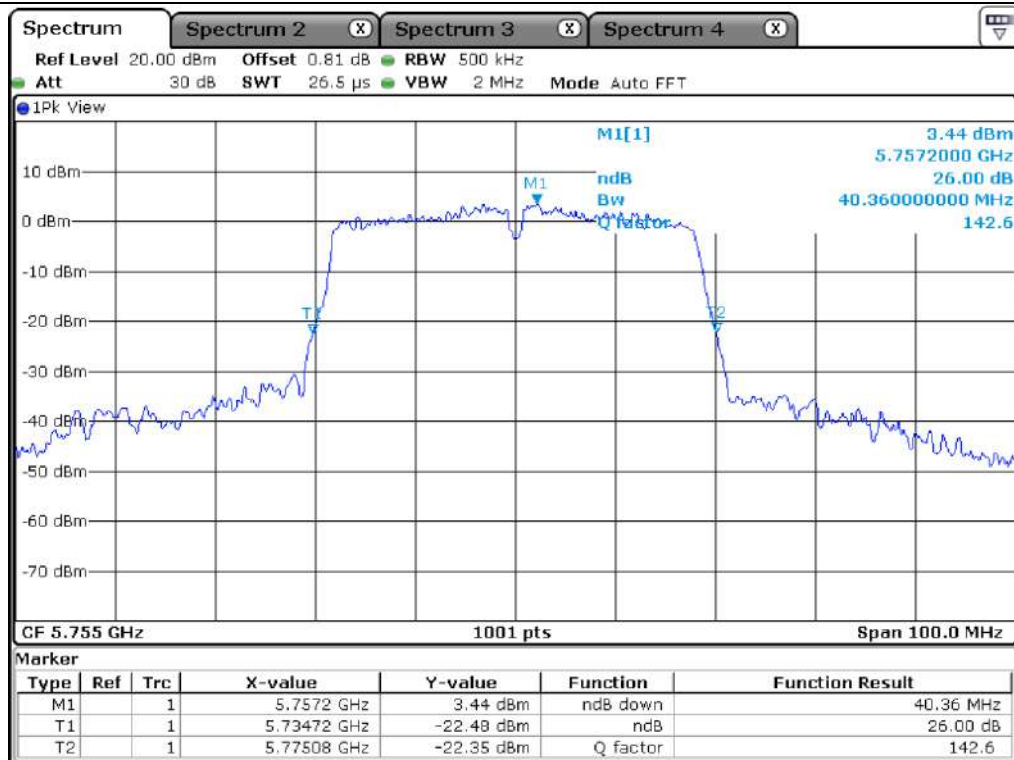

Low Channel (5 755 MHz)

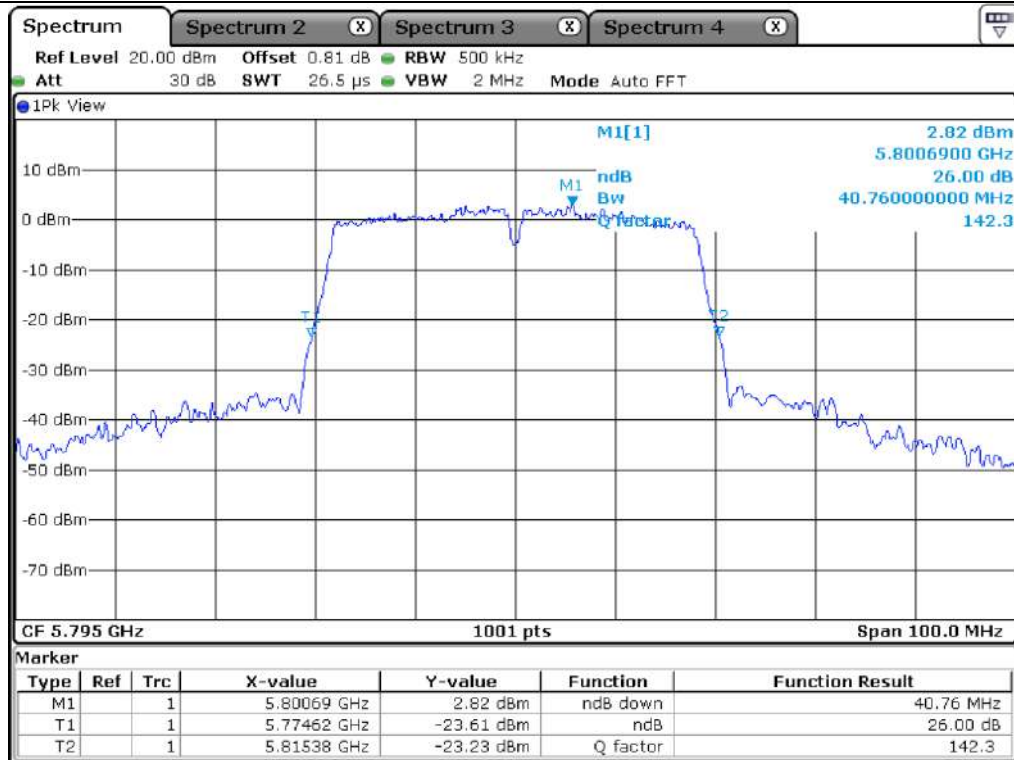


High Channel (5 795 MHz)

7.6.2 Test data for Antenna 1


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 190.00	39.86
	High	5 230.00	39.76
5 250 ~ 5 350	Low	5 270.00	39.16
	High	5 310.00	39.76
5 470 ~ 5 725	Low	5 510.00	40.76
	Middle	5 550.00	40.56
	High	5 670.00	40.16
5 725 ~ 5 850	Low	5 755.00	40.26
	High	5 795.00	40.16


Remark: See next page for measurement data.

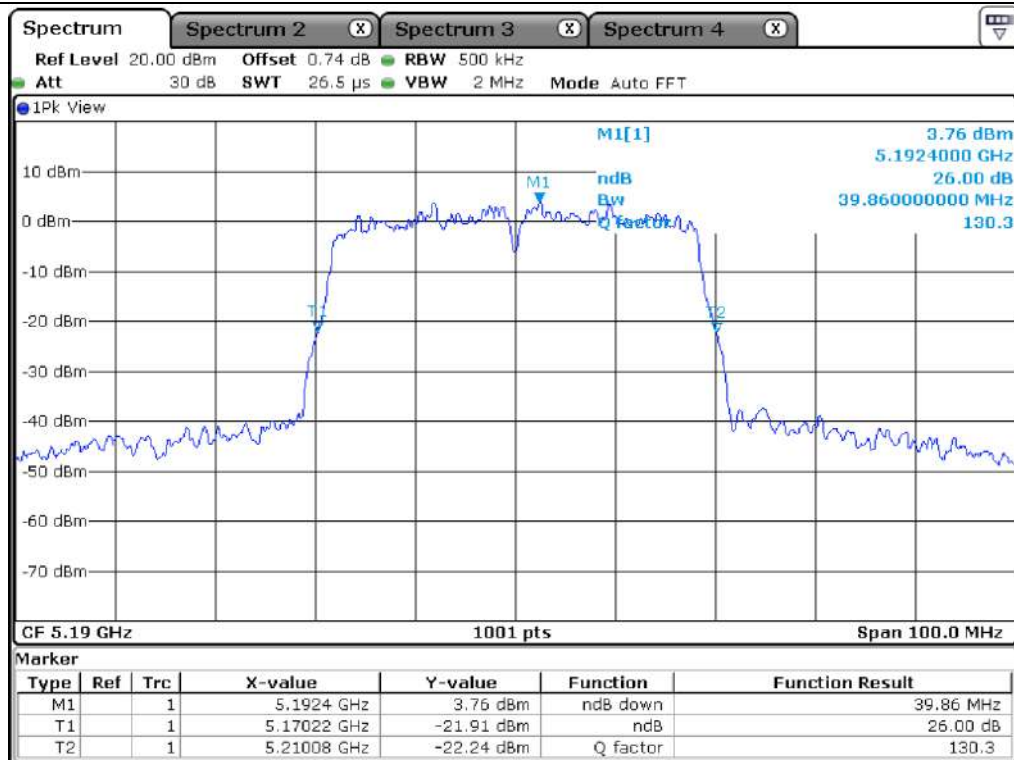


Low Channel (5 190 MHz)

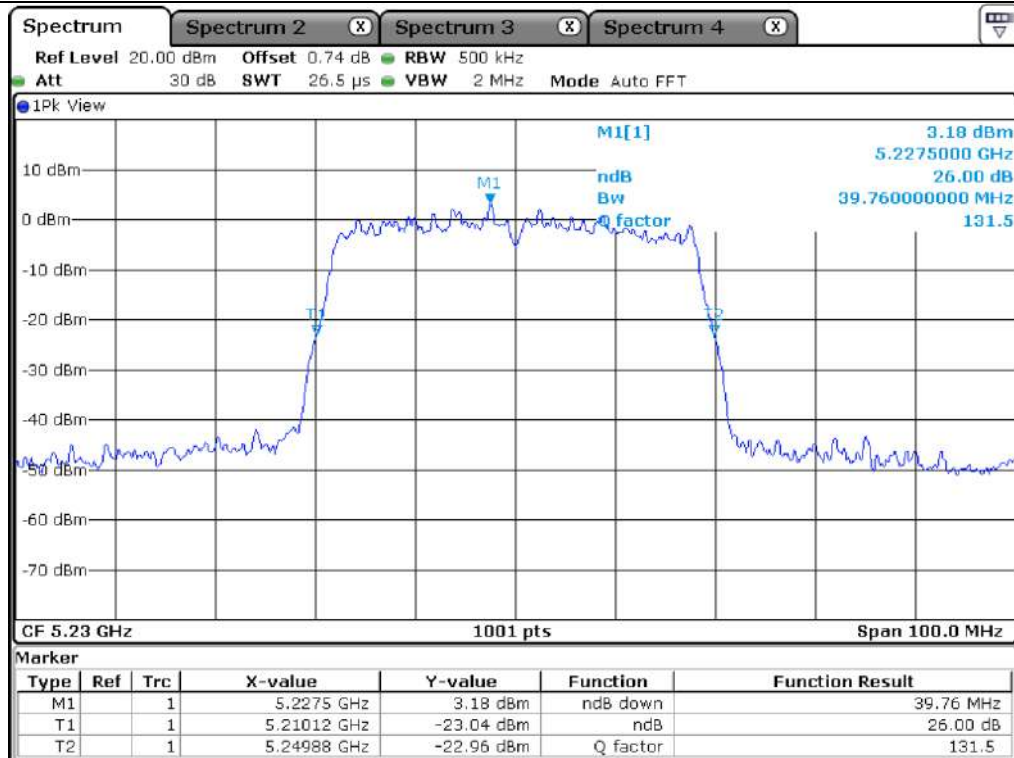

High Channel (5 230 MHz)

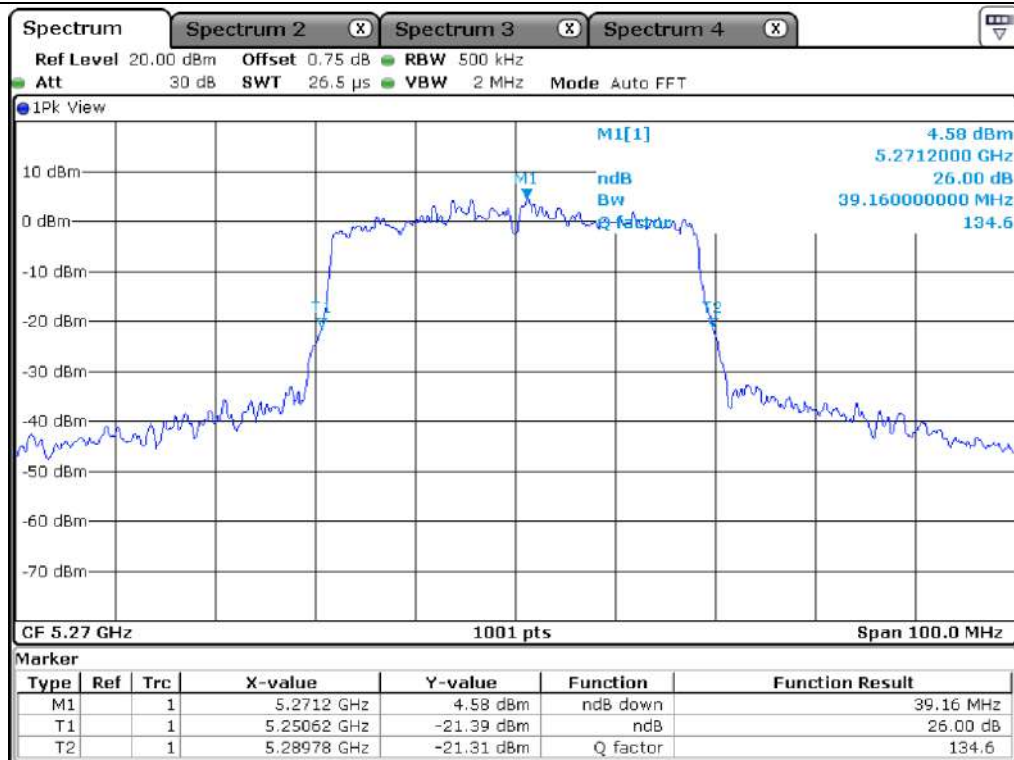

Low Channel (5 270 MHz)

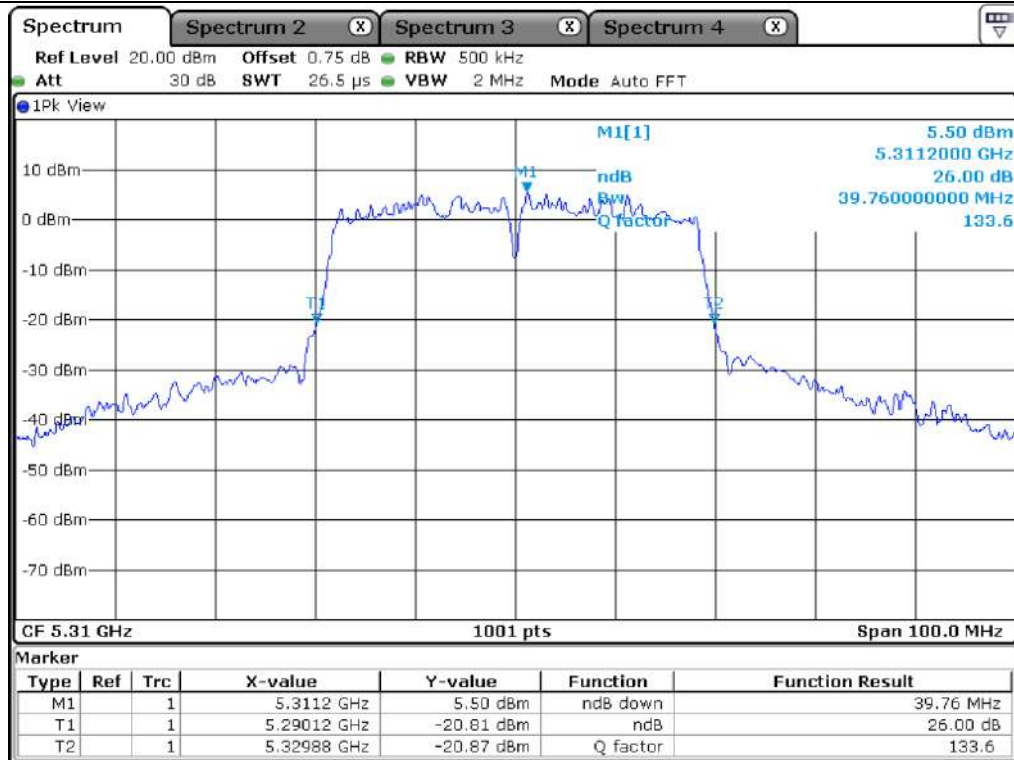


High Channel (5 310 MHz)

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

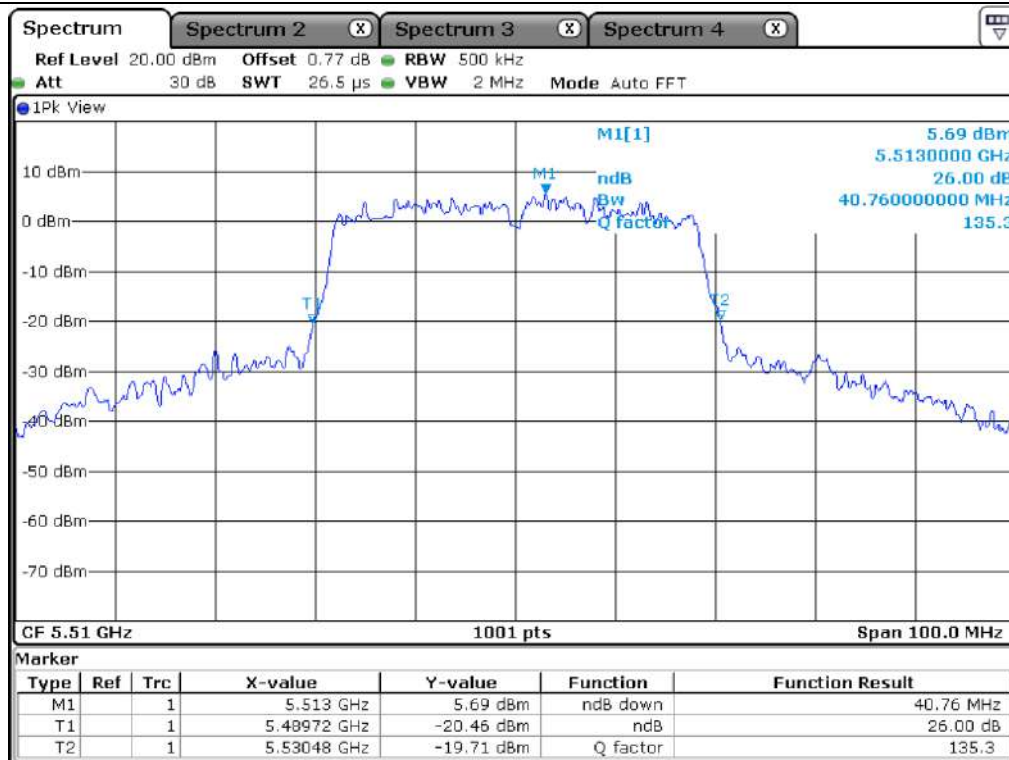


Low Channel (5 510 MHz)

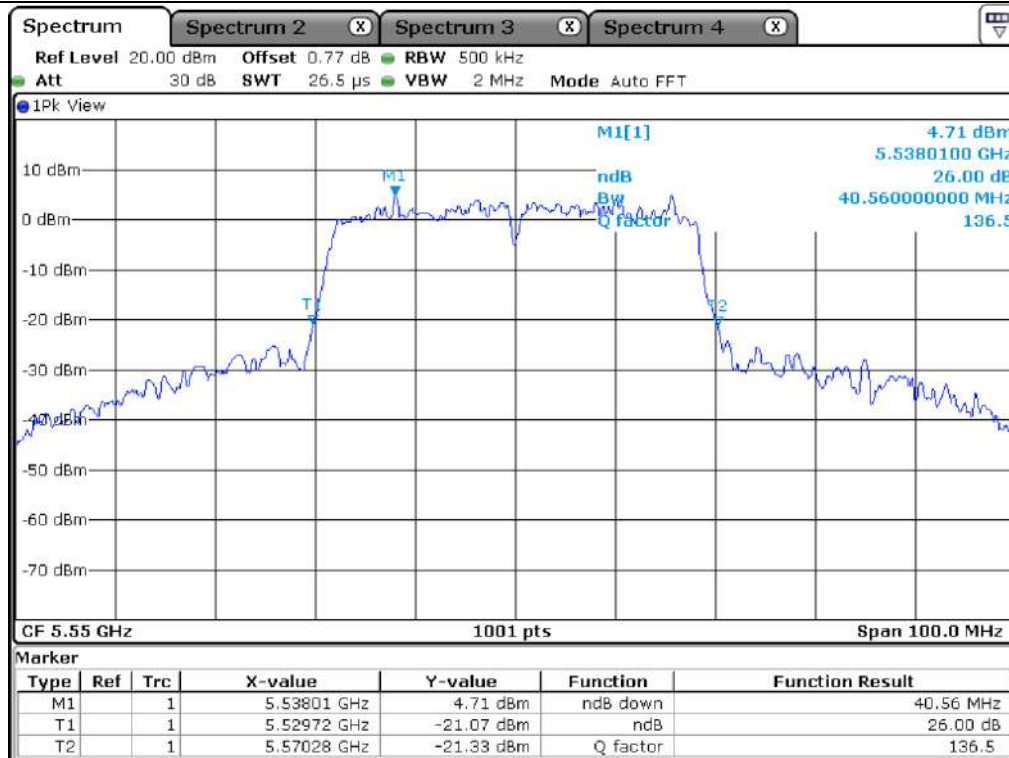


Middle Channel (5 550 MHz)

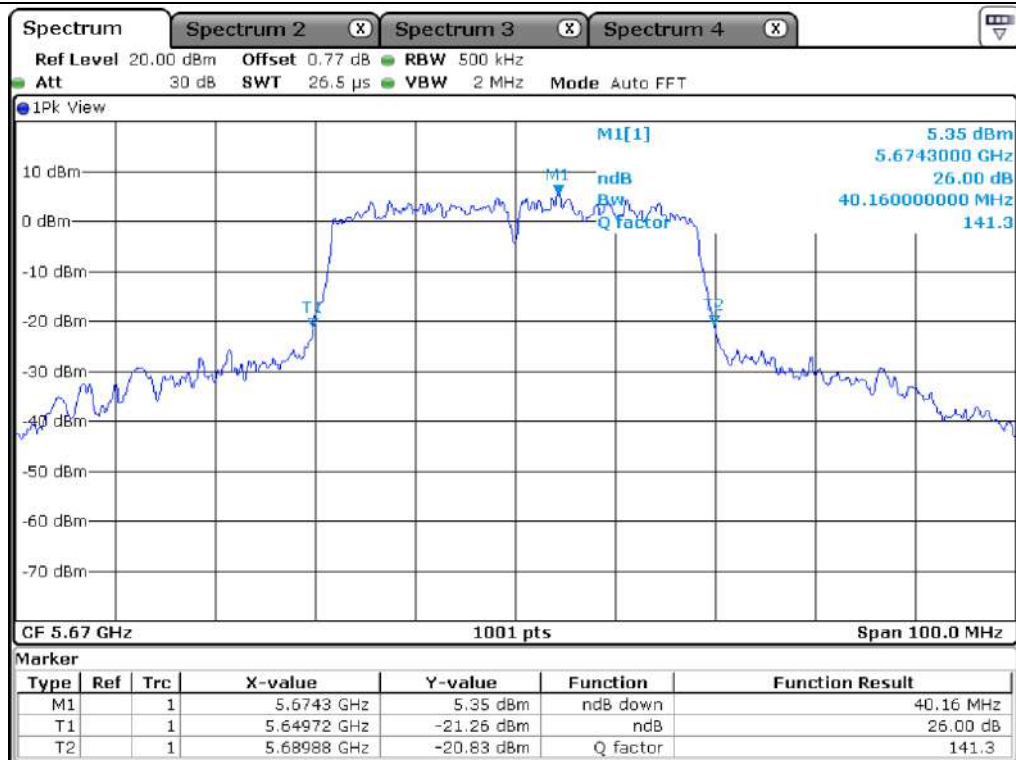

High Channel (5 670 MHz)

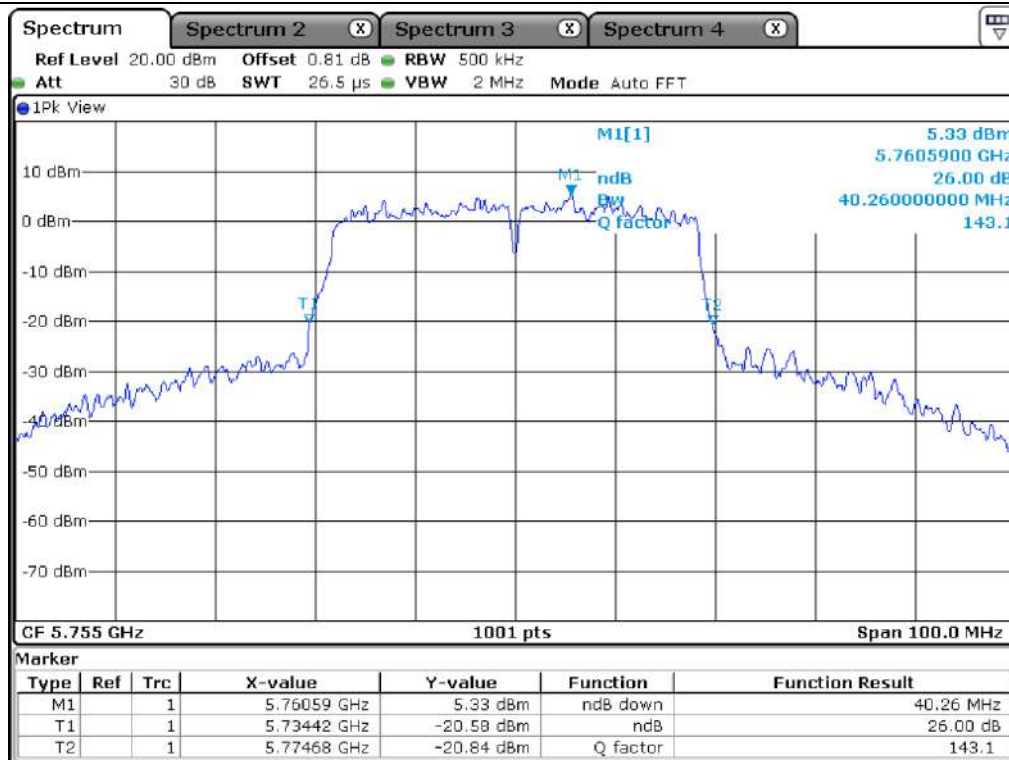

Low Channel (5 755 MHz)

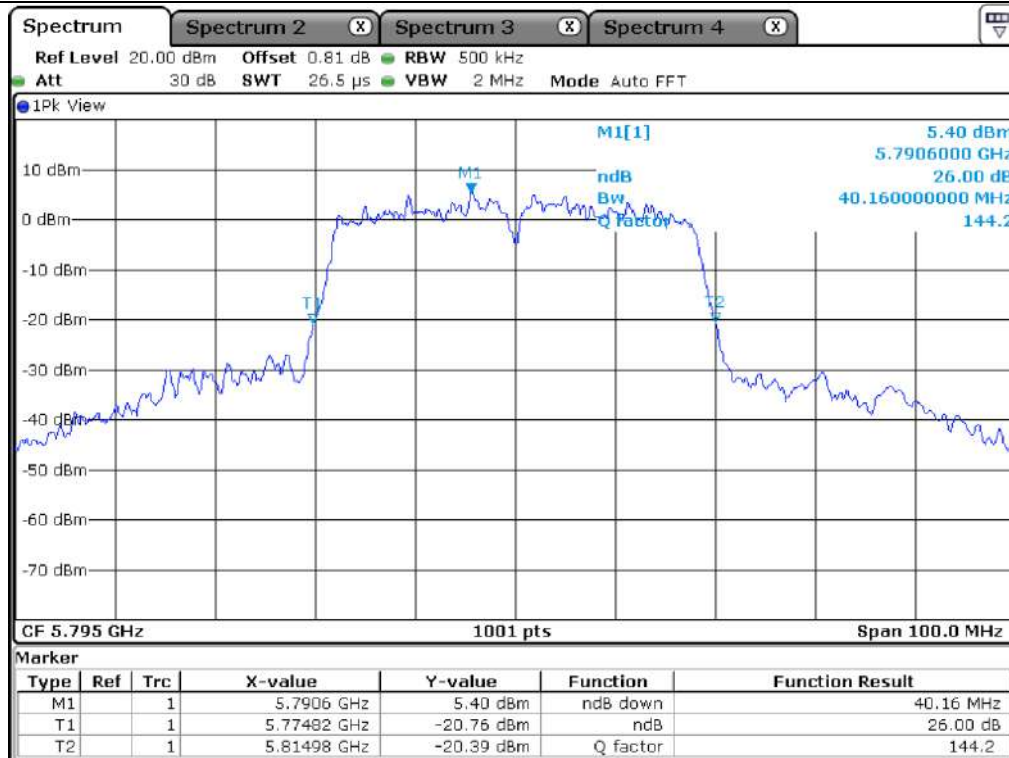

High Channel (5 795 MHz)

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.


OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

7.6.3 Test data for Staddle Channel_Antenna 0

-. Test Result : Pass


FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 710.00	35.18
5 725 ~ 5 850	5 710.00	5.08

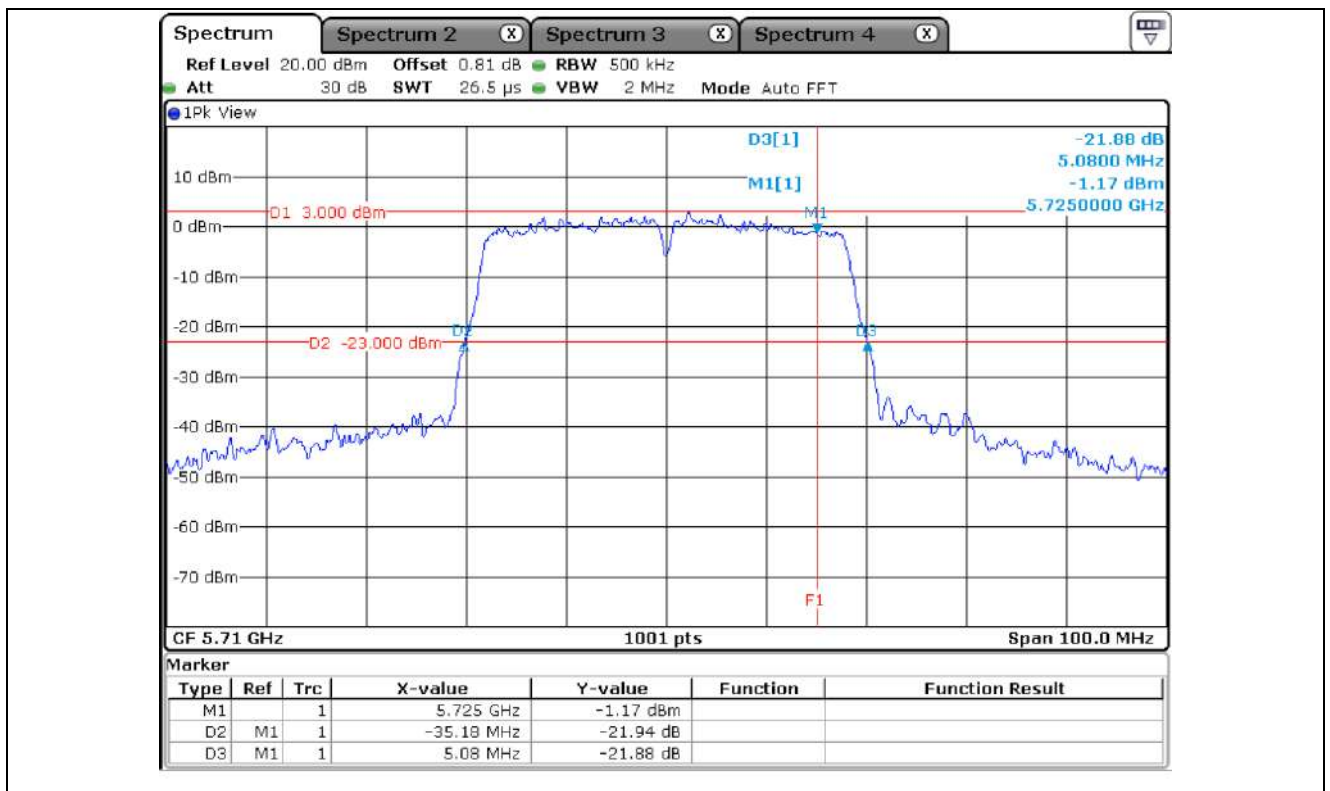

7.6.4 Test data for Staddle Channel_Antenna 1

-. Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 710.00	34.98
5 725 ~ 5 850	5 710.00	4.98

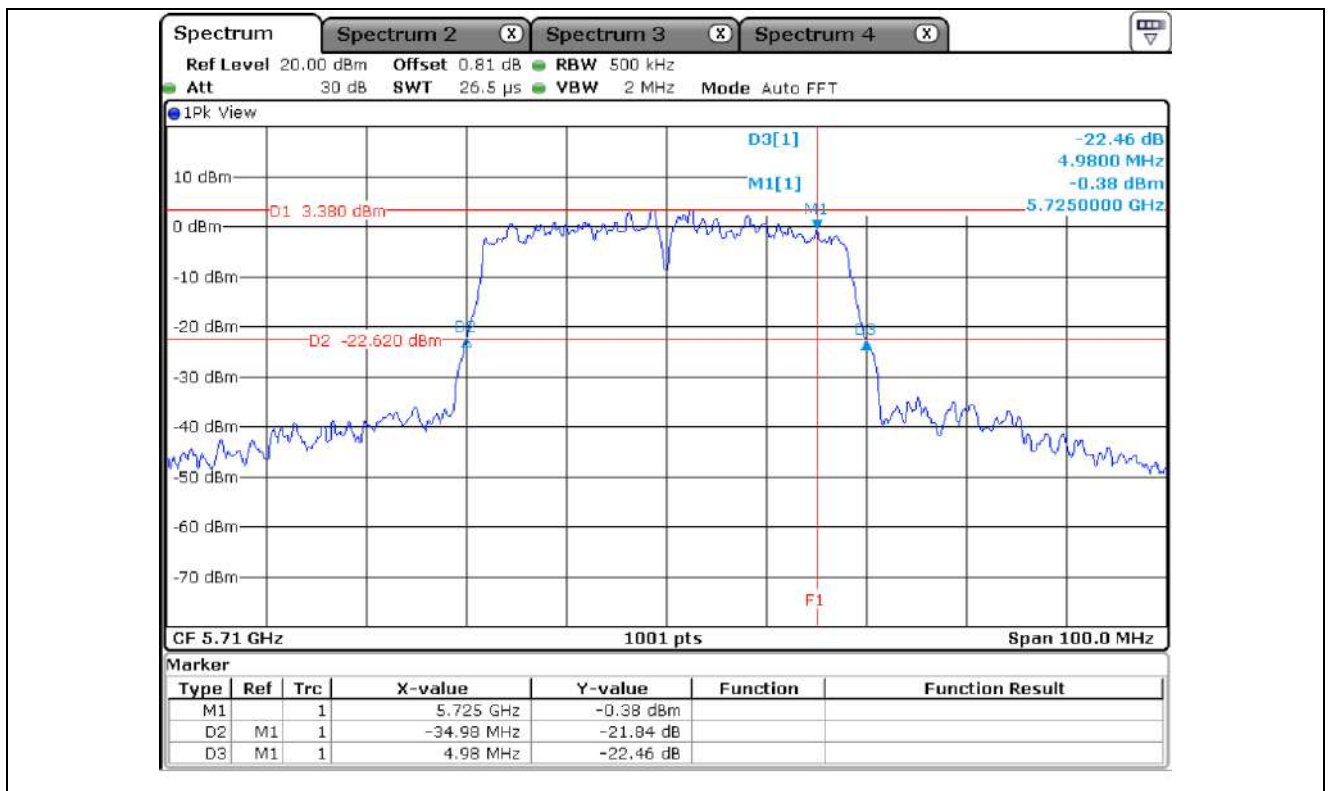


7.7 Test data for 802.11ac_VHT80 RLAN Mode

7.7.1 Test data for Antenna 0


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Middle	5 210.00	80.52
5 250 ~ 5 350	Middle	5 290.00	80.32
5 470 ~ 5 725	Middle	5 530.00	80.52
5 725 ~ 5 850	Middle	5 775.00	80.52


Remark: See next page for measurement data.

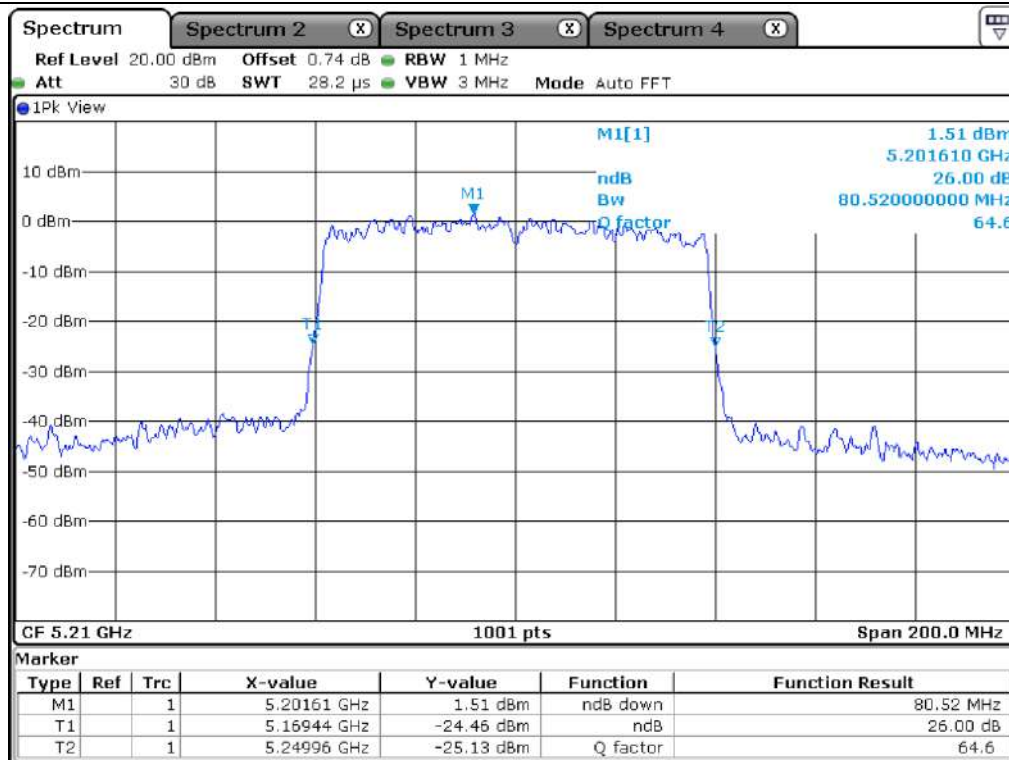


Middle Channel (5 210 MHz)

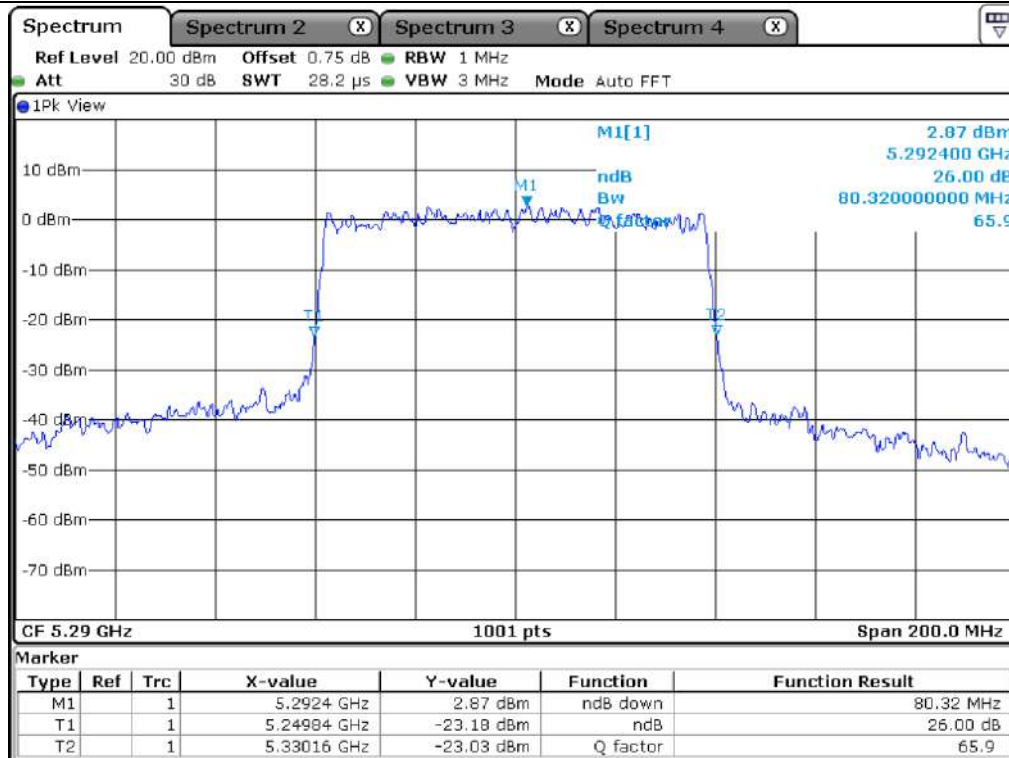

Middle Channel (5 290 MHz)

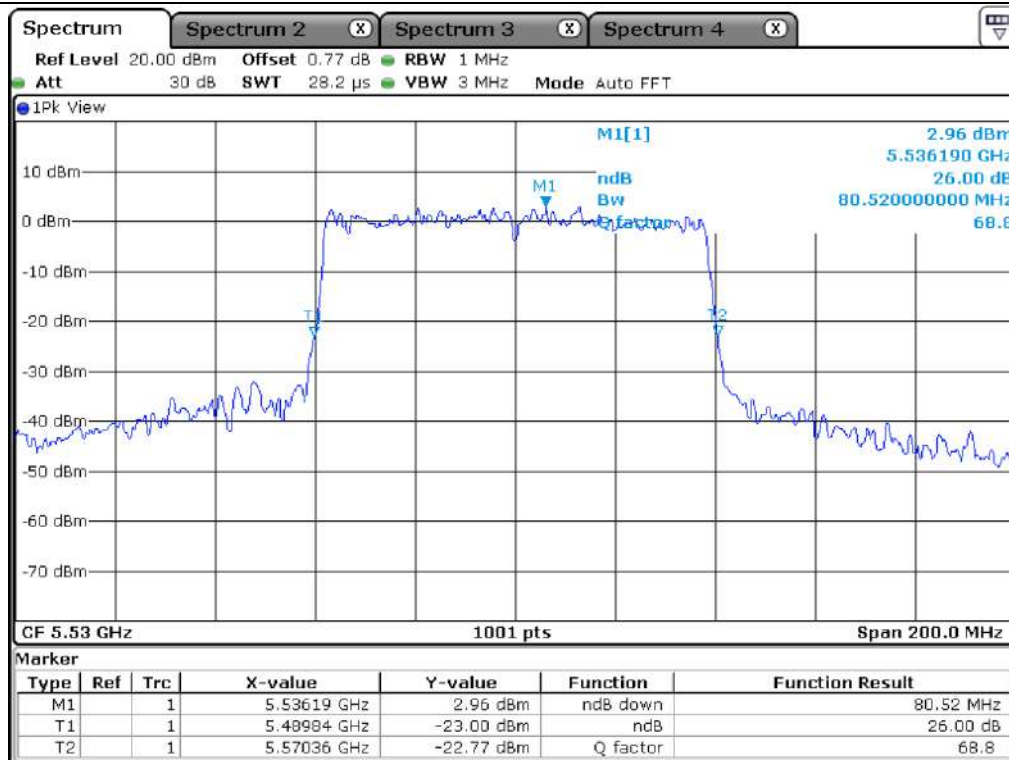

Middle Channel (5 530 MHz)

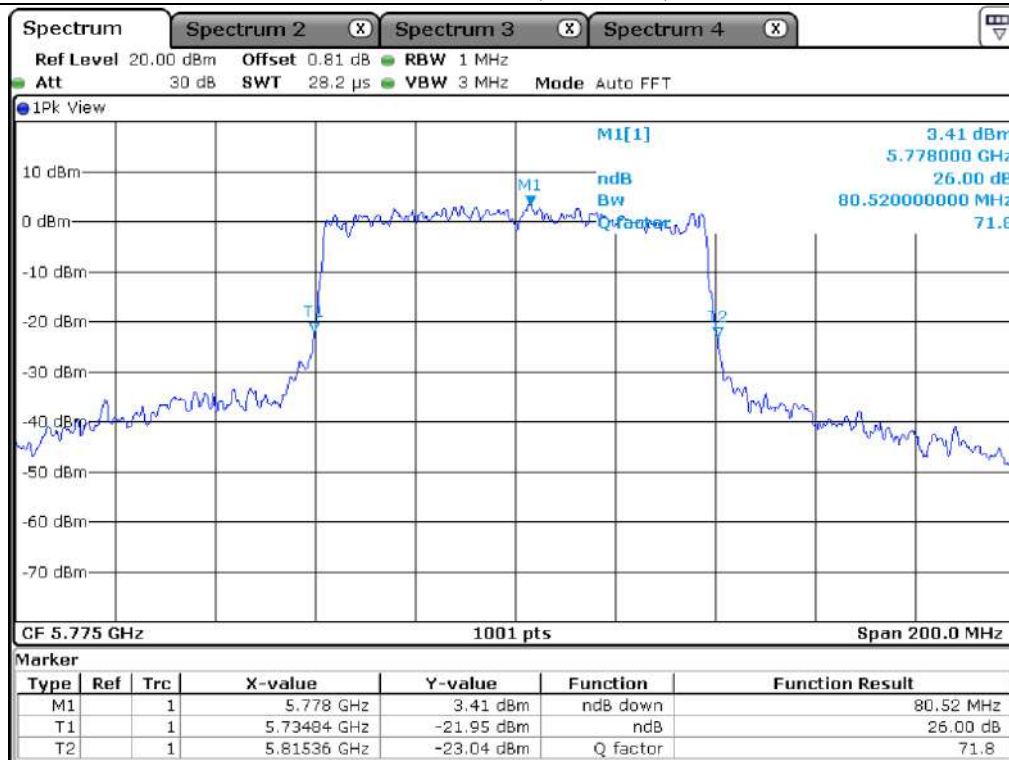

Middle Channel (5 775 MHz)

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

7.7.2 Test data for Antenna 1


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Middle	5 210.00	80.32
5 250 ~ 5 350	Middle	5 290.00	80.12
5 470 ~ 5 725	Middle	5 530.00	79.52
5 725 ~ 5 850	Middle	5 775.00	80.52


Remark: See next page for measurement data.

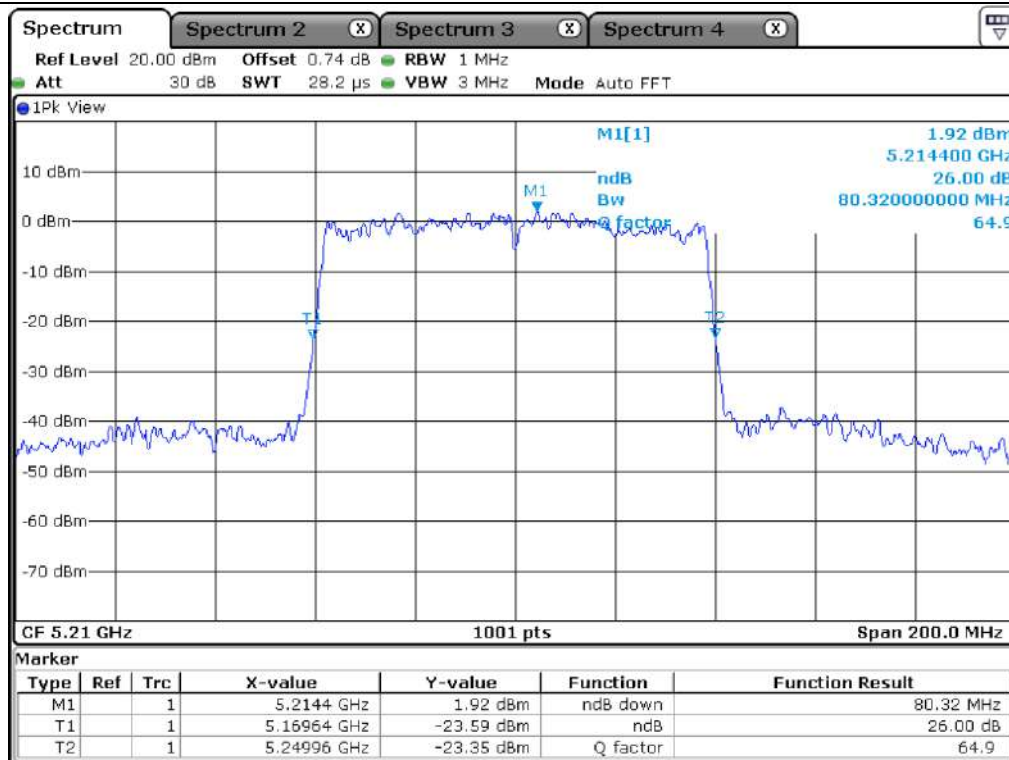


Middle Channel (5 210 MHz)

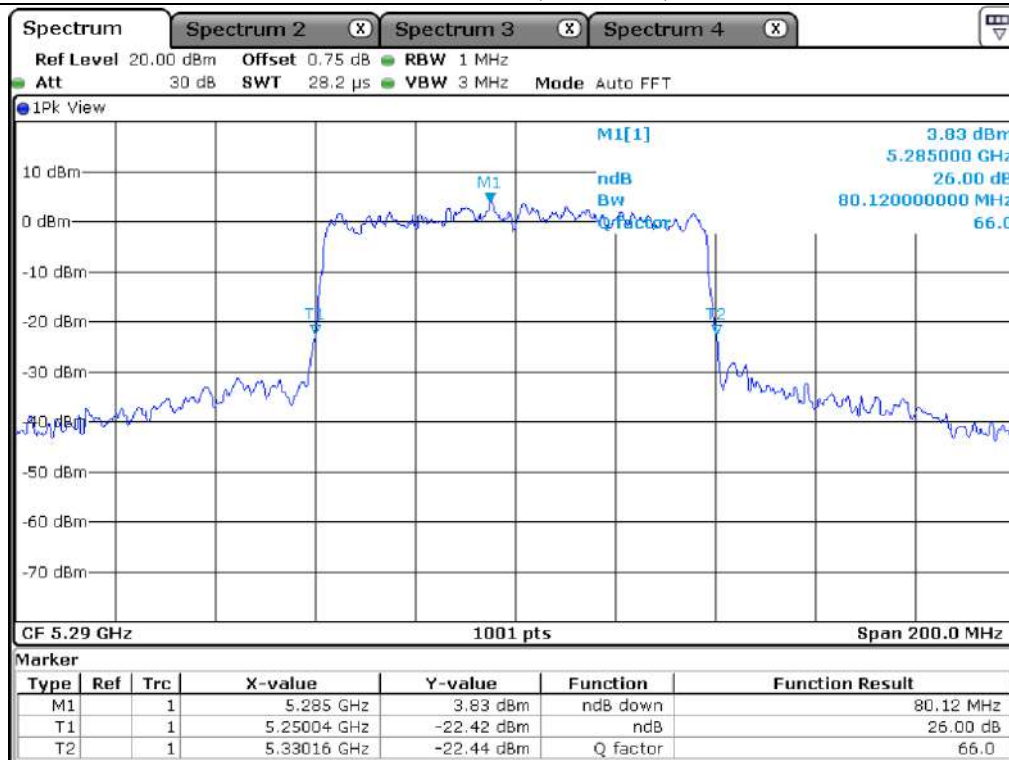

Middle Channel (5 290 MHz)

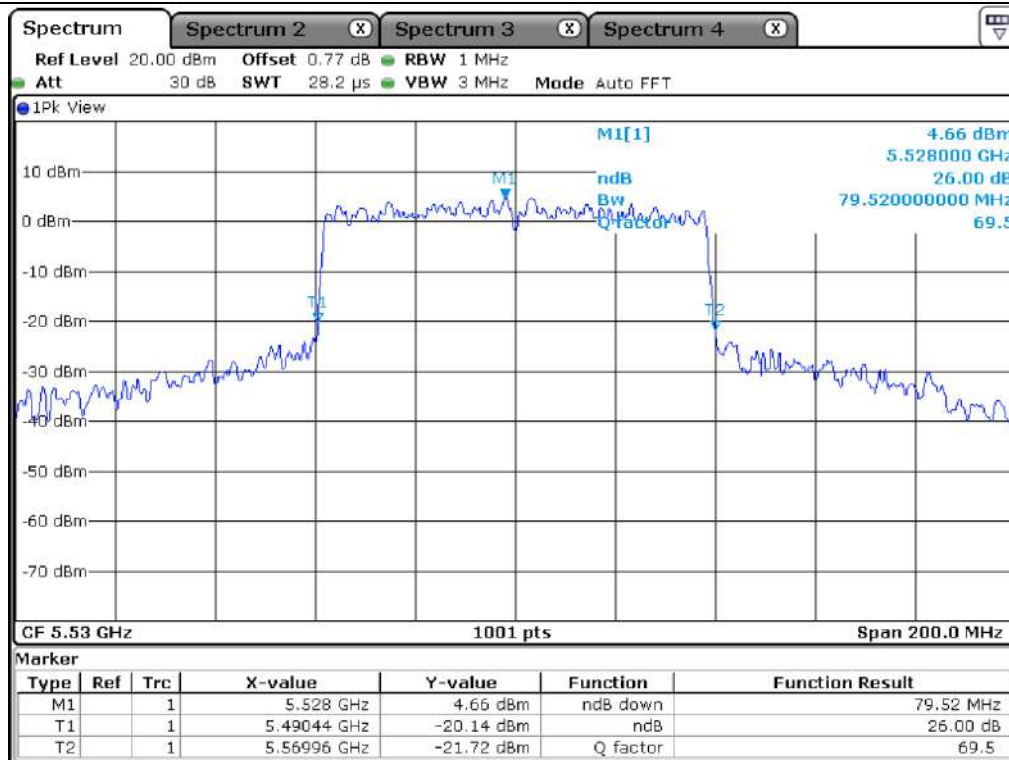

Middle Channel (5 530 MHz)

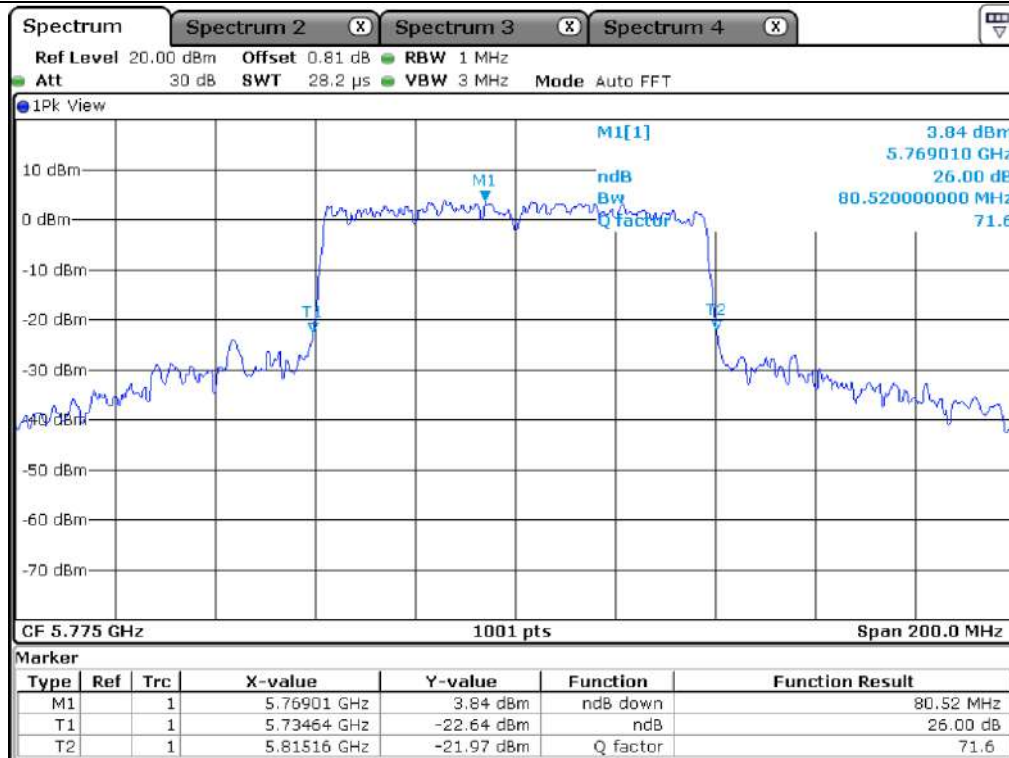

Middle Channel (5 775 MHz)

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.


OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

7.7.3 Test data for Staddle Channel_Antenna 0

-. Test Result : Pass


FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 690.00	75.16
5 725 ~ 5 850	5 690.00	4.76

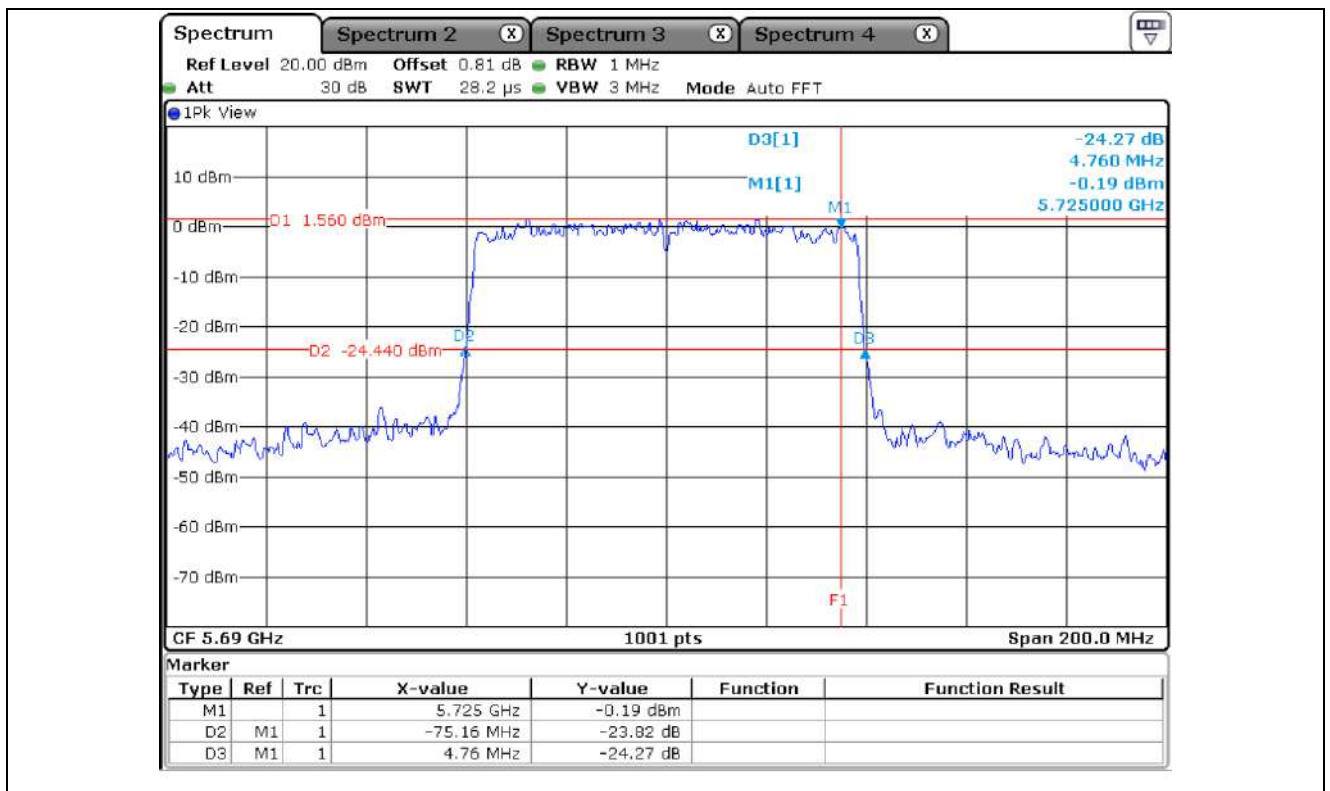

7.7.4 Test data for Staddle Channel_Antenna 1

-. Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 690.00	74.76
5 725 ~ 5 850	5 690.00	4.76

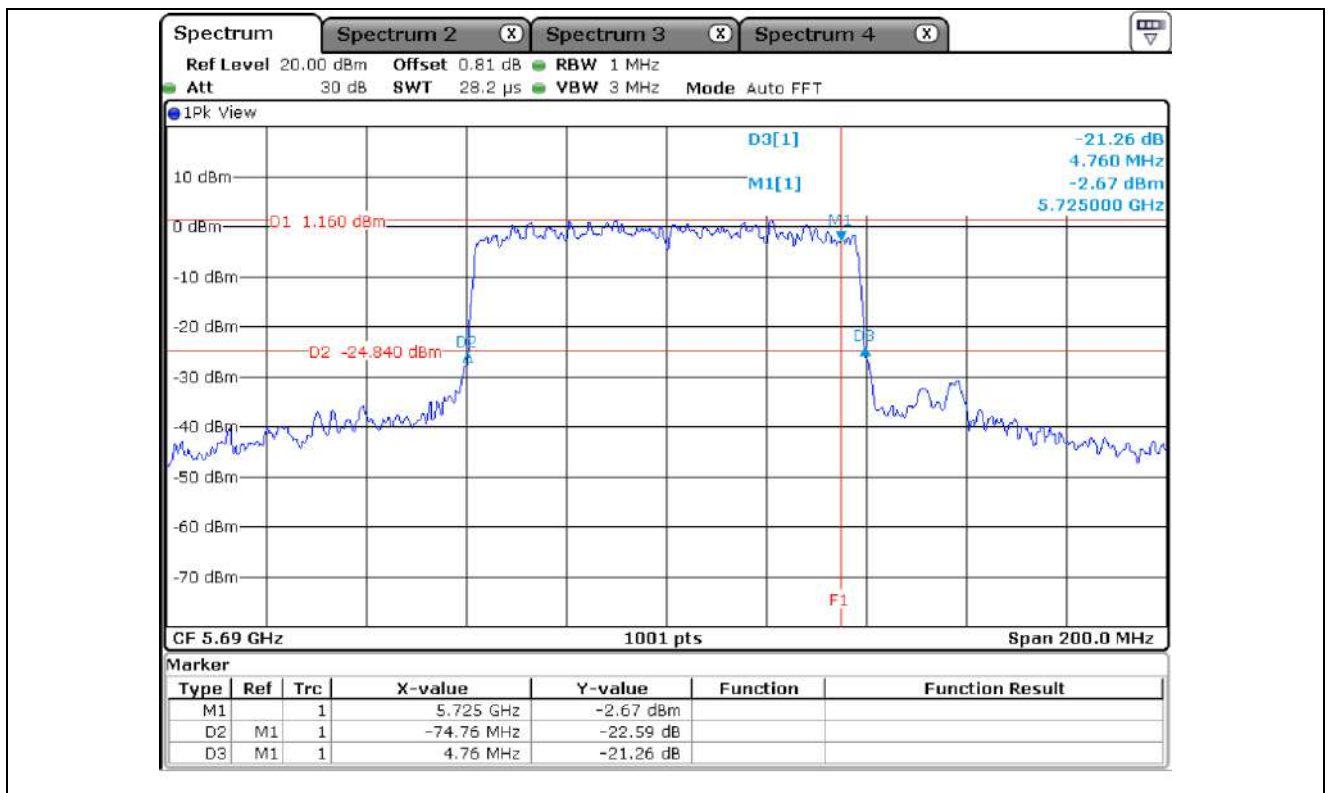


8. 6 dB BANDWIDTH

8.1 Operating environment

Temperature : 22 °C
Relative humidity : 44 % R.H.


8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.




8.3 Test Date

May 10, 2021 ~ May 26, 2021

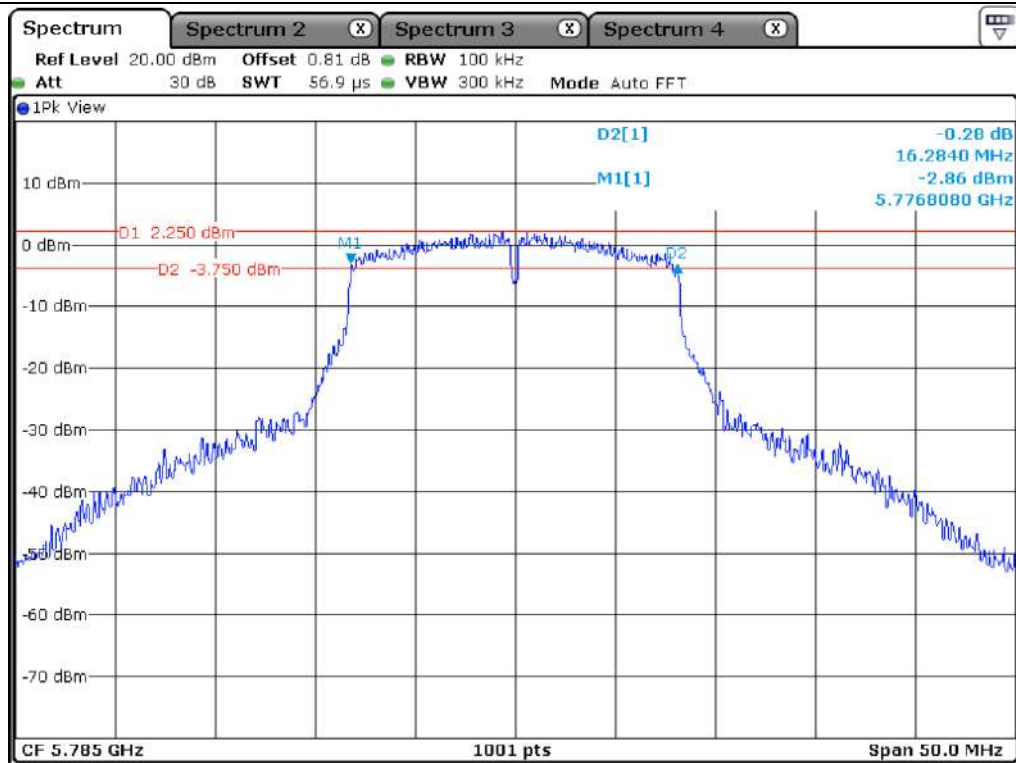

Middle Channel (5 785 MHz)

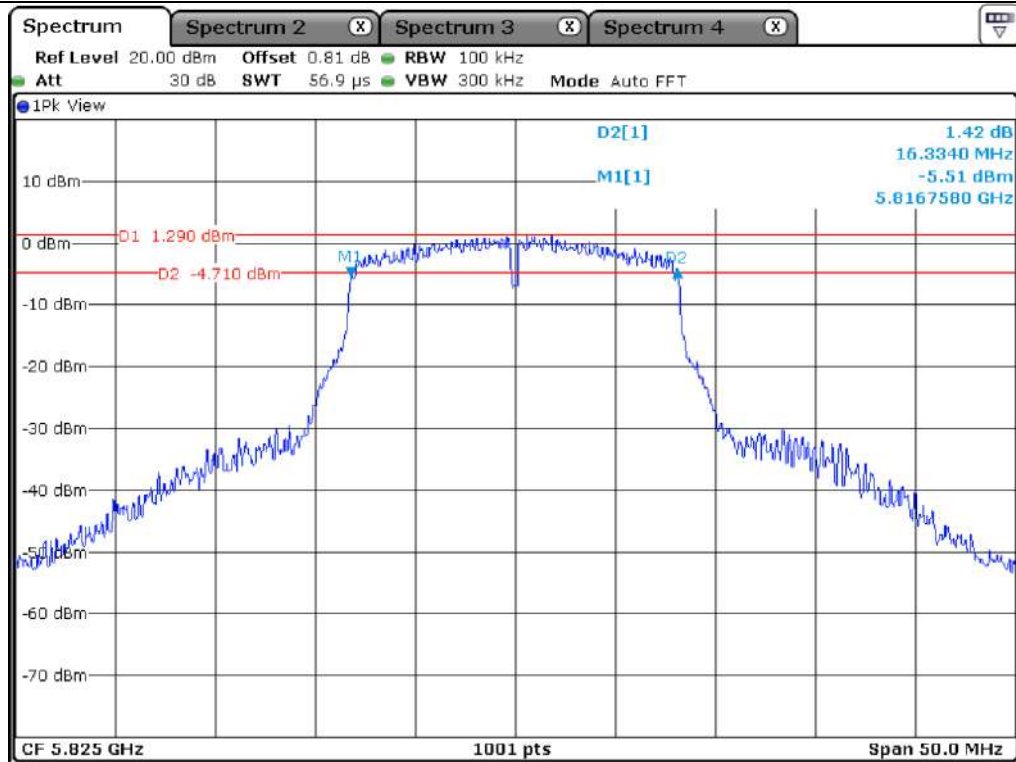


High Channel (5 825 MHz)

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

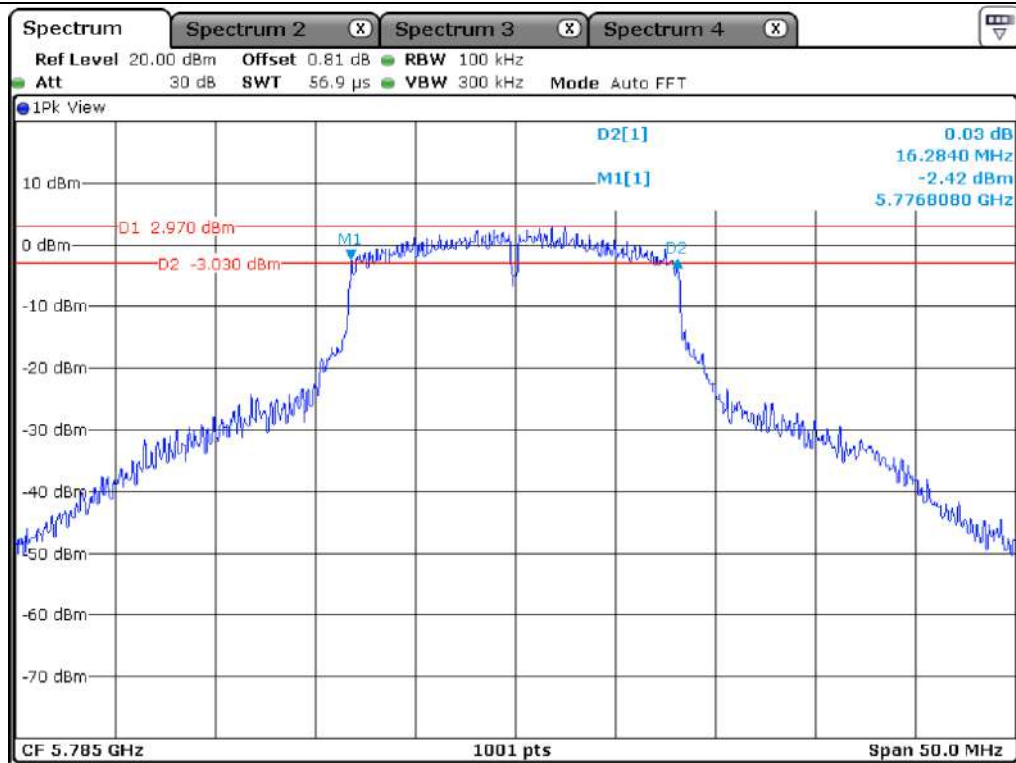

Middle Channel (5 785 MHz)

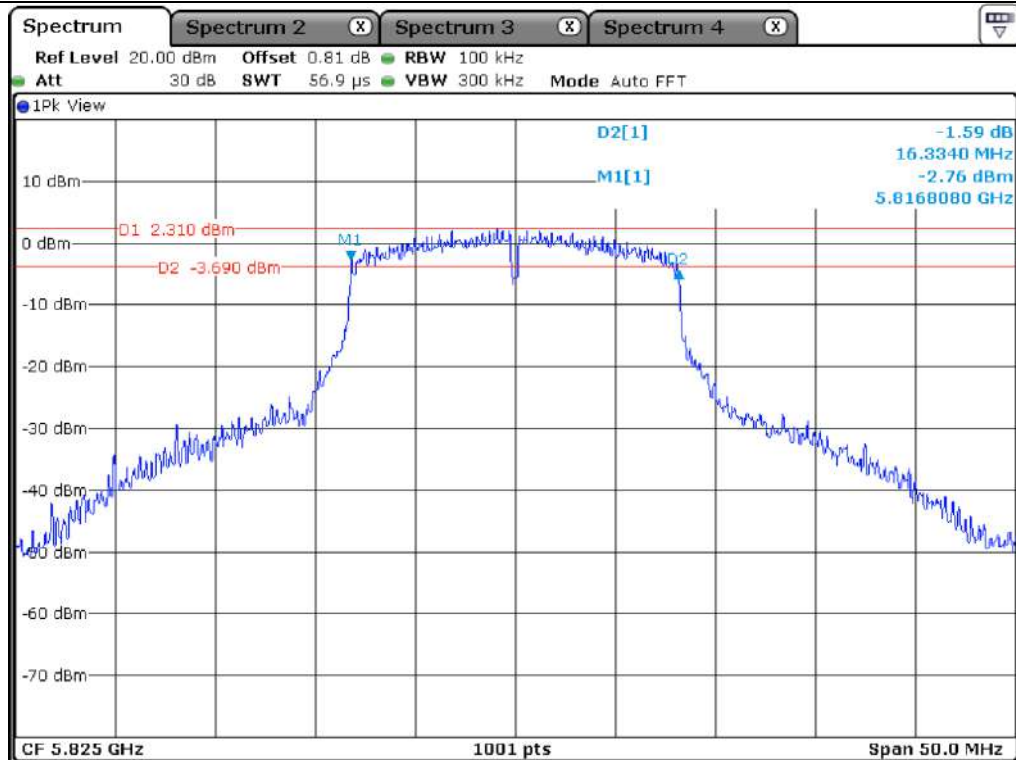

High Channel (5 825 MHz)

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.


OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

8.4.3 Test data for Staddle Channel_Antenna 0

-. Test Result : Pass


FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 470 ~ 5 725	5 720.00	13.19
5 725 ~ 5 850	5 720.00	3.14

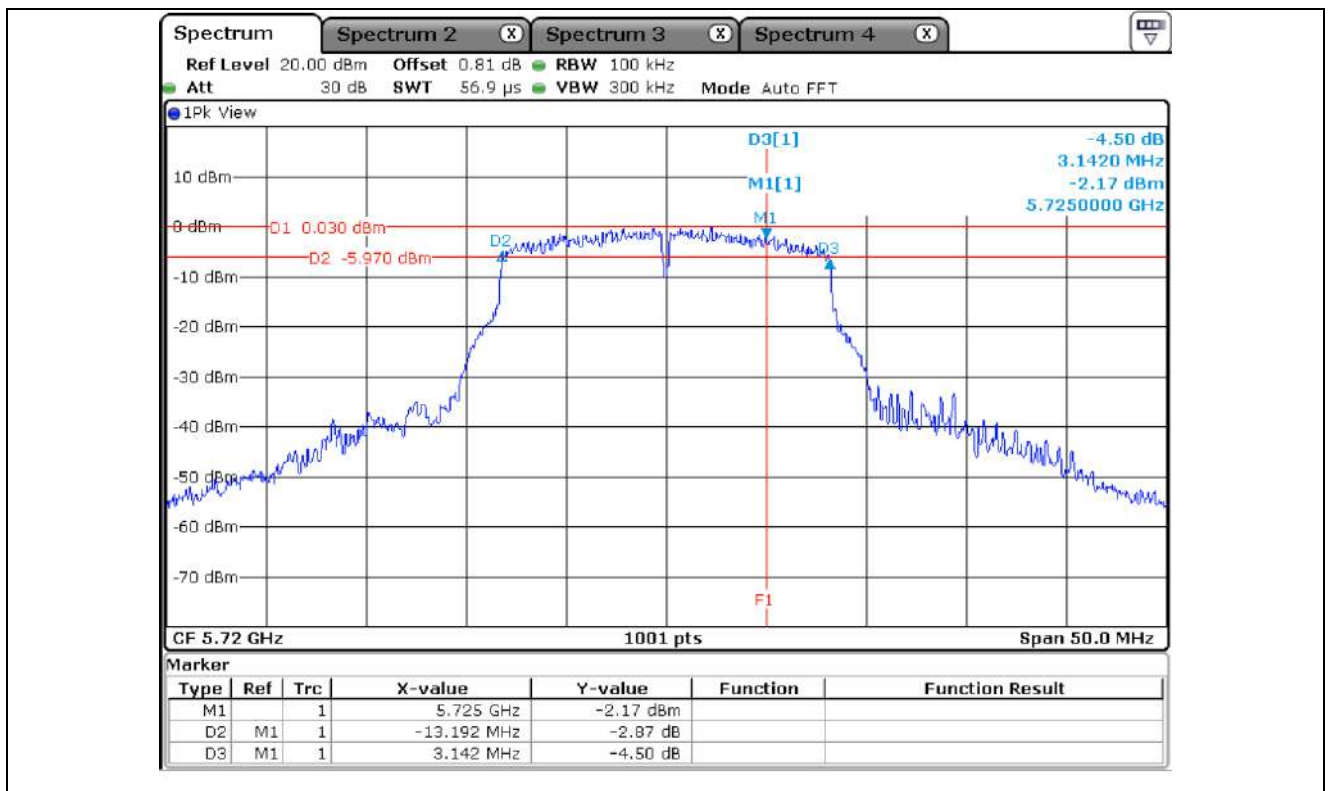

8.4.4 Test data for Staddle Channel_Antenna 1

-. Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 470 ~ 5 725	5 720.00	13.19
5 725 ~ 5 850	5 720.00	3.09

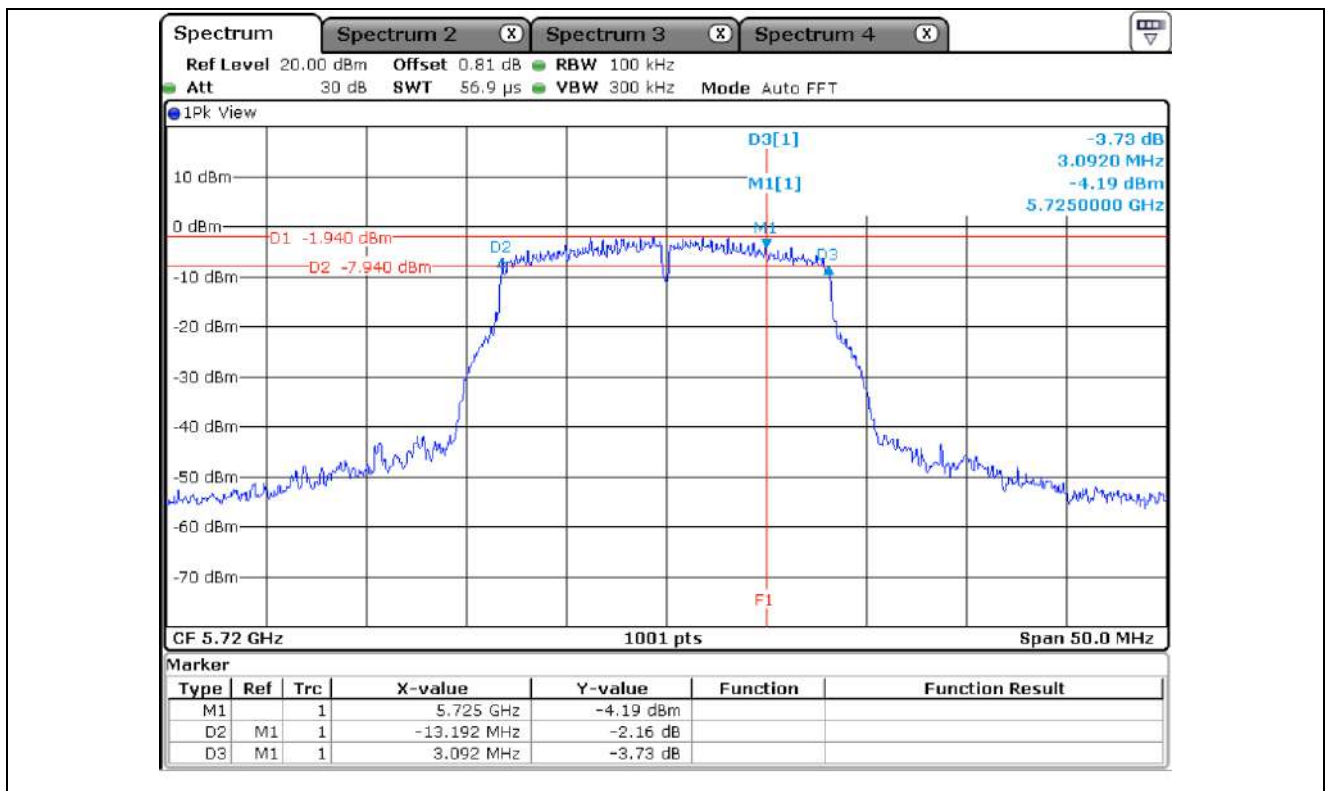

8.5 Test data for 802.11n_HT20 RLAN Mode

8.5.1 Test data for Antenna 0

-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745.00	17.53
	Middle	5 785.00	17.58
	High	5 825.00	17.53

