

RADIO PERFORMANCE TEST REPORT

Test Report No. : OT-21O-RWD-039
Reception No. : 2110004558
Applicant : Samsung Electronics Co Ltd
Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey, 07058, United States
Manufacturer : Samsung Electronics Co Ltd
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do 16677, Korea
Type of Equipment : Wi-Fi/BT Transceiver
FCC ID. : A3LWCB731M
Model Name : WCB731M
Multiple Model Name : WCB730M, WCB737M, WCB736M
Serial number : N/A
Total page of Report : 318 pages (including this page)
Date of Incoming : October 07, 2021
Date of issue : October 25, 2021


SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART E Section 15.407**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.





Tested by
 Youngyong Kim/ Assistant Manager
 ONETECH Corp.

Reviewed by
 Tae-Ho, Kim / Senior Manager
 ONETECH Corp.

Approved by
 Ki-Hong, Nam / General Manager
 ONETECH Corp.

CONTENTS

	Page
1. VERIFICATION OF COMPLIANCE	10
2. TEST SUMMARY	11
2.1 TEST ITEMS AND RESULTS	11
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	11
2.3 RELATED SUBMITTAL(S) / GRANT(S)	11
2.4 PURPOSE OF THE TEST	11
2.5 TEST METHODOLOGY.....	11
2.6 TEST FACILITY.....	11
3. GENERAL INFORMATION.....	12
3.1 PRODUCT DESCRIPTION.....	12
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	17
4. EUT MODIFICATIONS.....	17
5. SYSTEM TEST CONFIGURATION	18
5.1 JUSTIFICATION.....	18
5.2 PERIPHERAL EQUIPMENT	18
5.3 MODE OF OPERATION DURING THE TEST	19
5.4 CONFIGURATION OF TEST SYSTEM.....	50
5.5 ANTENNA REQUIREMENT	50
6. PRELIMINARY TEST	50
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	50
6.2 GENERAL RADIATED EMISSIONS TESTS	50
7. MINIMUM 26 dB BANDWIDTH.....	51
7.1 OPERATING ENVIRONMENT	51
7.2 TEST SET-UP	51
7.3 TEST DATE	51
7.4 TEST DATA FOR 802.11A RLAN MODE.....	52
7.4.1 Test data for Antenna 0	52
7.4.2 Test data for Antenna 1	61
7.4.3 Test data for Staddle Channel_Antenna 0	70
7.4.4 Test data for Staddle Channel_Antenna 1	71
7.5 TEST DATA FOR 802.11N_HT20 RLAN MODE.....	72
7.5.1 Test data for Antenna 0	72

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

7.5.2 Test data for Antenna 1	81
7.5.3 Test data for Staddle Channel_Antenna 0	90
7.5.4 Test data for Staddle Channel_Antenna 1	91
7.6 TEST DATA FOR 802.11N_HT40 RLAN MODE	92
7.6.1 Test data for Antenna 0	92
7.6.2 Test data for Antenna 1	98
7.6.3 Test data for Staddle Channel_Antenna 0	104
7.6.4 Test data for Staddle Channel_Antenna 1	105
7.7 TEST DATA FOR 802.11AC_VHT80 RLAN MODE	106
7.7.1 Test data for Antenna 0	106
7.7.2 Test data for Antenna 1	109
7.7.3 Test data for Staddle Channel_Antenna 0	112
7.7.4 Test data for Staddle Channel_Antenna 1	113
8. 6 dB BANDWIDTH	114
8.1 OPERATING ENVIRONMENT	114
8.2 TEST SET-UP	114
8.3 TEST DATE	114
8.4 TEST DATA FOR 802.11A RLAN MODE	115
8.4.1 Test data for Antenna 0	115
8.4.2 Test data for Antenna 1	117
8.4.3 Test data for Staddle Channel_Antenna 0	119
8.4.4 Test data for Staddle Channel_Antenna 1	120
8.5 TEST DATA FOR 802.11N_HT 20 RLAN MODE	121
8.5.1 Test data for Antenna 0	121
8.5.2 Test data for Antenna 1	123
8.5.3 Test data for Staddle Channel_Antenna 0	125
8.5.4 Test data for Staddle Channel_Antenna 1	126
8.6 TEST DATA FOR 802.11N_HT40 RLAN MODE	127
8.6.1 Test data for Antenna 0	127
8.6.2 Test data for Antenna 1	129
8.6.3 Test data for Staddle Channel_Antenna 0	131
8.6.4 Test data for Staddle Channel_Antenna 1	132
8.7 TEST DATA FOR 802.11AC_VHT80 RLAN MODE	133
8.7.1 Test data for Antenna 0	133
8.7.2 Test data for Antenna 1	134
8.7.3 Test data for Staddle Channel_Antenna 0	135
8.7.4 Test data for Staddle Channel_Antenna 1	136

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

9. MAXIMUM CONDUCTED OUTPUT POWER.....	137
9.1 OPERATING ENVIRONMENT	137
9.2 TEST SET-UP	137
9.3 TEST DATE	137
9.4 TEST DATA FOR 802.11A RLAN MODE.....	138
<i>9.4.1 Test data for Antenna 0</i>	<i>138</i>
<i>9.4.2 Test data for Antenna 1</i>	<i>139</i>
<i>9.4.3 Test data for Multiple Transmit</i>	<i>140</i>
<i>9.4.4 Test data for Staddle Channel_Antenna 0</i>	<i>141</i>
<i>9.4.5 Test data for Staddle Channel_Antenna 1</i>	<i>141</i>
<i>9.4.6 Test data for Staddle Channel_Multiple Transmit</i>	<i>141</i>
9.5 TEST DATA FOR 802.11N_HT20 RLAN MODE	142
<i>9.5.1 Test data for Antenna 0</i>	<i>142</i>
<i>9.5.2 Test data for Antenna 1</i>	<i>143</i>
<i>9.5.3 Test data for Multiple Transmit</i>	<i>144</i>
<i>9.5.4 Test data for Staddle Channel_Antenna 0</i>	<i>145</i>
<i>9.5.5 Test data for Staddle Channel_Antenna 1</i>	<i>145</i>
<i>9.5.6 Test data for Staddle Channel_Multiple Transmit</i>	<i>145</i>
9.6 TEST DATA FOR 802.11N_HT40 RLAN MODE	146
<i>9.6.1 Test data for Antenna 0</i>	<i>146</i>
<i>9.6.2 Test data for Antenna 1</i>	<i>146</i>
<i>9.6.3 Test data for Multiple Transmit</i>	<i>147</i>
<i>9.6.4 Test data for Staddle Channel_Antenna 0</i>	<i>148</i>
<i>9.6.5 Test data for Staddle Channel_Antenna 1</i>	<i>148</i>
<i>9.6.6 Test data for Staddle Channel_Multiple Transmit</i>	<i>148</i>
9.7 TEST DATA FOR 802.11AC_HT80 RLAN MODE.....	149
<i>9.7.1 Test data for Antenna 0</i>	<i>149</i>
<i>9.7.2 Test data for Antenna 1</i>	<i>149</i>
<i>9.7.3 Test data for Multiple Transmit</i>	<i>149</i>
<i>9.7.4 Test data for Staddle Channel_Antenna 0</i>	<i>150</i>
<i>9.7.5 Test data for Staddle Channel_Antenna 1</i>	<i>150</i>
<i>9.7.6 Test data for Staddle Channel_Multiple Transmit</i>	<i>150</i>
10. PEAK POWER SPECTRUL DENSITY	151
10.1 OPERATING ENVIRONMENT	151
10.2 TEST SET-UP	151
10.3 TEST DATE	151
10.4 TEST DATA FOR 802.11A RLAN MODE.....	152

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

10.4.1 Test data for Antenna 0	152
10.4.2 Test data for Antenna 1	161
10.4.3 Test data for Multiple Transmit	170
10.4.4 Test data for Staddle Channel_Antenna 0	171
10.4.5 Test data for Staddle Channel_Antenna 1	173
10.4.6 Test data for Staddle Channel_Multiple Transmit	175
10.5 TEST DATA FOR 802.11N_HT20 RLAN MODE	176
10.5.1 Test data for Antenna 0	176
10.5.2 Test data for Antenna 1	185
10.5.3 Test data for Multiple Transmit	194
10.5.4 Test data for Staddle Channel_Antenna 0	195
10.5.5 Test data for Staddle Channel_Antenna 1	197
10.5.6 Test data for Staddle Channel_Multiple Transmit	199
10.6 TEST DATA FOR 802.11N_HT40 RLAN MODE	200
10.6.1 Test data for Antenna 0	200
10.6.2 Test data for Antenna 1	206
10.6.3 Test data for Multiple Transmit	212
10.6.4 Test data for Staddle Channel_Antenna 0	213
10.6.5 Test data for Staddle Channel_Antenna 1	215
10.6.6 Test data for Staddle Channel_Multiple Transmit	217
10.7 TEST DATA FOR 802.11AC_HT80 RLAN MODE	218
10.7.1 Test data for Antenna 0	218
10.7.2 Test data for Antenna 1	221
10.7.3 Test data for Multiple Transmit	224
10.7.4 Test data for Staddle Channel_Antenna 0	225
10.7.5 Test data for Staddle Channel_Antenna 1	227
10.7.6 Test data for Staddle Channel_Multiple Transmit	229
11. FREQUENCY STABILITY WITH TEMPERATURE VARIATION	230
11.1 OPERATING ENVIRONMENT	230
11.2 TEST SET-UP	230
11.3 TEST DATE	230
11.4 TEST DATA FOR U-NII-1	231
11.5 TEST DATA FOR U-NII-2A	232
11.6 TEST DATA FOR U-NII-2C	233
11.7 TEST DATA FOR U-NII-3	234
12. FREQUENCY STABILITY WITH VOLTAGE VARIATION	235
12.1 OPERATING ENVIRONMENT	235

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

12.2 TEST SET-UP	235
12.3 TEST DATE	235
12.4 TEST DATA FOR U-NII-1	236
12.5 TEST DATA FOR U-NII-2A.....	236
12.6 TEST DATA FOR U-NII-2C.....	237
12.7 TEST DATA FOR U-NII-3	237
13. RADIATED SPURIOUS EMISSIONS.....	238
13.1 OPERATING ENVIRONMENT	238
13.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	238
13.3 TEST DATE	238
13.4 TEST DATA FOR BELOW 30 MHz	239
13.5 TEST DATA FOR 30 MHz ~ 1 000 MHz	240
13.5.1 Test data for the Basic model (WCB731M)	240
13.5.2 Test data for the Multiple model (WCB730M)	243
13.5.3 Test data for the Multiple model (WCB737M)	246
13.5.4 Test data for the Multiple model (WCB736M)	249
13.6 TEST DATA FOR ABOVE 1 GHz.....	252
13.6.1 Test data for Frequency UNII I	252
13.6.2 Test data for Frequency UNII 2A	256
13.6.3 Test data for Frequency UNII 2C	260
13.6.4 Test data for Frequency UNII 3.....	264
14. RADIATED RESTRICTED BAND EDGE MEASUREMENTS.....	268
14.1 OPERATING ENVIRONMENT	268
14.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	268
14.3 TEST DATE	268
14.4 TEST DATA FOR FREQUENCY UNII I.....	269
14.4.1 Test data for 802.11a RLAN Mode	269
14.4.2 Test data for 802.11n_HT20 RLAN Mode.....	269
14.4.3 Test data for 802.11n_HT40 RLAN Mode.....	270
14.4.4 Test data for 802.11ac_HT80 RLAN Mode	270
14.5 TEST DATA FOR FREQUENCY UNII 2A.....	271
14.5.1 Test data for 802.11a RLAN Mode	271
14.5.2 Test data for 802.11n_HT20 RLAN Mode.....	271
14.5.3 Test data for 802.11n_HT40 RLAN Mode.....	272
14.5.4 Test data for 802.11ac_HT80 RLAN Mode	272
14.6 TEST DATA FOR FREQUENCY UNII 2C.....	273
14.6.1 Test data for 802.11a RLAN Mode	273

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

14.6.2 Test data for 802.11n_HT20 RLAN Mode.....	273
14.6.3 Test data for 802.11n_HT40 RLAN Mode.....	274
14.6.4 Test data for 802.11ac_HT80 RLAN Mode	274
14.7 TEST DATA FOR FREQUENCY U-NII-3.....	275
14.7.1 Test data for 802.11a RLAN Mode	275
14.7.2 Test data for 802.11n_HT20 RLAN Mode.....	277
14.7.3 Test data for 802.11n_HT40 RLAN Mode.....	279
14.7.4 Test data for 802.11ac_HT80 RLAN Mode	281
14.7.5 U-NII-3 Emission Limits	282
15. CONDUCTED EMISSION TEST.....	283
15.1 OPERATING ENVIRONMENT	283
15.2 TEST SET-UP	283
15.3 TEST DATE	283
15.4 TEST DATA FOR THE BASIC MODEL (WCB731M).....	284
15.4.1 Test data for WLAN 5 GHz	284
15.4.2 Test data for Intermodulation Mode(Bluetooth LE + WLAN 2.4 GHz + WLAN 5 GHz)	286
15.4.3 Test data for Intermodulation Mode(Bluetooth + WLAN 2.4 GHz + WLAN 5 GHz)	288
15.5 TEST DATA FOR THE MULTIPLE MODEL (WCB730M)	290
15.5.1 Test data for WLAN 5 GHz	290
15.5.2 Test data for Intermodulation Mode(Bluetooth LE + WLAN 2.4 GHz + WLAN 5 GHz)	292
15.5.3 Test data for Intermodulation Mode(Bluetooth + WLAN 2.4 GHz + WLAN 5 GHz)	294
15.6 TEST DATA FOR THE MULTIPLE MODEL (WCB737M)	296
15.6.1 Test data for WLAN 5 GHz	296
15.6.2 Test data for Intermodulation Mode(Bluetooth LE + WLAN 2.4 GHz + WLAN 5 GHz)	298
15.6.3 Test data for Intermodulation Mode(Bluetooth + WLAN 2.4 GHz + WLAN 5 GHz)	300
15.7 TEST DATA FOR THE MULTIPLE MODEL (WCB736M)	302
15.7.1 Test data for WLAN 5 GHz	302
15.7.2 Test data for Intermodulation Mode(Bluetooth LE + WLAN 2.4 GHz + WLAN 5 GHz)	304
15.7.3 Test data for Intermodulation Mode(Bluetooth + WLAN 2.4 GHz + WLAN 5 GHz)	306
16. DYNAMIC FREQUENCY SELECTION (DFS)	308
16.1 OPERATING ENVIRONMENT	308
16.2 TEST SET-UPS	308
16.3 DFS TEST SIGNALS	310
16.4 TECHNICAL REQUIREMENT SPECIFICATION	311
16.5 TEST DATE	311
16.6 TEST DATA.....	312
16.6.1 UNII 2A.....	312

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

16.6.2 UNII 3	315
17. LIST OF TEST EQUIPMENT	318

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-21O-RWD-039	October 25, 2021	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : Samsung Electronics Co Ltd
 Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey, 07058, United States
 Contact Person : Jenni Chun / General Manager
 Telephone No. : 973-808-6375
 FCC ID : A3LWCB731M
 Model Name : WCB731M
 Brand Name : 
 Serial Number : N/A
 Date : October 25, 2021

EQUIPMENT CLASS	Unlicensed National Information infrastructure(UNII)
E.U.T. DESCRIPTION	Modular Transmitter, Wi-Fi/BT Transceiver
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2020
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART E Section 15.407 789033 D02 General UNII Test Procedures New Rules v02r01
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.407(a)	26 dB Bandwidth	PASS
15.407(a)	Maximum Conducted Output Power	Met the Limit / PASS
15.407(a)	Peak Power Spectral Density	Met the Limit / PASS
15.407(e)	6 dB Bandwidth	Met the Limit / PASS
15.407(g)	Frequency Stability	Met the Limit / PASS
15.407(b)	Undesirable Emissions	Met the Limit / PASS
15.205, 15.407(b)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Met the Limit / PASS
15.207	AC Conducted Emissions 150 kHz-30 MHz	Met the Limit / PASS
15.407(h)	Dynamic frequency Selection	Met the Limit / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART E Section 15.407

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2020. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

3. GENERAL INFORMATION

3.1 Product Description

The Samsung Electronics Co Ltd, Model WCB731M (referred to as the EUT in this report) is a Wi-Fi/BT Transceiver. The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Wi-Fi/BT Transceiver	
Temperature Range	-20 °C ~ 50 °C	
OPERATING FREQUENCY	Bluetooth LE	2 402 MHz ~ 2 480 MHz
	Bluetooth	2 402 MHz ~ 2 480 MHz
	WLAN 2.4 GHz	2 412 MHz ~ 2 472 MHz (802.11b/g/n(HT20))
		2 422 MHz ~ 2 462 MHz (802.11n(HT40))
	WLAN 5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz (802.11a/n(HT20)/ac(VHT20))
		5 190 MHz ~ 5 230 MHz (802.11n(HT40)/ac(VHT40))
		5 210 MHz (802.11ac(VHT80))
	WLAN 5 250 MHz ~ 5 350 MHz Band	5 260 MHz ~ 5 320 MHz (802.11a/n(HT20)/ac(VHT20))
		5 270 MHz ~ 5 310 MHz (802.11n(HT40)/ac(VHT40))
		5 290 MHz (802.11ac(VHT80))
	WLAN 5 470 MHz ~ 5 725 MHz Band	5 500 MHz ~ 5 720 MHz (802.11a/n(HT20)/ac(VHT20))
		5 510 MHz ~ 5 710 MHz (802.11n(HT40)/ac(VHT40))
		5 530 MHz ~ 5 690 MHz (802.11ac(VHT80))
	WLAN 5 725 MHz ~ 5 850 MHz Band	5 745 MHz ~ 5 825 MHz (802.11a/n(HT20)/ac(VHT20))
		5 755 MHz ~ 5 795 MHz (802.11n(HT40)/ac(VHT40))
		5 775 MHz (802.11ac(VHT80))
MODULATION TYPE	Bluetooth LE	GFSK for 1 Mbps / 2 Mbps
	Bluetooth	GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8-DPSK for 3Mbps
	WLAN 2.4 GHz	802.11b: DSSS Modulation(DBPSK/DQPSK/CCK) 802.11g/n(HT20)/n(HT40): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)
	WLAN 5 GHz	802.11a/n(HT20)/n(HT40)/ac(VHT80): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

RF OUTPUT POWER	Bluetooth LE	1 Mbps	11.26 dBm
		2 Mbps	11.25 dBm
	Bluetooth	1 Mbps	11.26 dBm
		2 Mbps	10.89 dBm
		3 Mbps	11.19 dBm
	WLAN 2.4 GHz	Antenna 0	17.30 dBm(802.11b) 11.15 dBm(802.11g) 10.75 dBm(802.11n_HT20) 9.49 dBm(802.11n_HT40)
		Antenna 1	17.32 dBm(802.11b) 14.60 dBm(802.11g) 14.31 dBm(802.11n_HT20) 13.54 dBm(802.11n_HT40)
		Multiple Antenna	16.22 dBm(802.11g) 15.90 dBm(802.11n_HT20) 14.98 dBm(802.11n_HT40)
	WLAN 5 150 MHz ~ 5 250 MHz Band	Antenna 0	8.73 dBm(802.11a) 8.77 dBm(802.11n_HT20) 10.33 dBm(802.11n_HT40) 8.88 dBm(802.11ac_VHT80)
		Antenna 1	9.02 dBm(802.11a) 8.88 dBm(802.11n_HT20) 10.46 dBm(802.11n_HT40) 9.22 dBm(802.11ac_VHT80)
		Multiple Antenna	11.79 dBm(802.11a) 11.69 dBm(802.11n_HT20) 13.27 dBm(802.11n_HT40) 12.06 dBm(802.11ac_VHT80)

RF OUTPUT POWER	WLAN 5 250 MHz ~ 5 350 MHz Band	Antenna 0	9.82 dBm(802.11a) 9.67 dBm(802.11n_HT20) 9.69 dBm(802.11n_HT40) 10.53 dBm(802.11ac_VHT80)
		Antenna 1	9.12 dBm(802.11a) 9.05 dBm(802.11n_HT20) 8.95 dBm(802.11n_HT40) 10.35 dBm(802.11ac_VHT80)
		Multiple Antenna	12.40 dBm(802.11a) 12.27 dBm(802.11n_HT20) 12.35 dBm(802.11n_HT40) 13.45 dBm(802.11ac_VHT80)
	WLAN 5 470 MHz ~ 5 725 MHz Band	Antenna 0	9.83 dBm(802.11a) 9.80 dBm(802.11n_HT20) 10.16 dBm(802.11n_HT40) 10.28 dBm(802.11ac_VHT80)
		Antenna 0_Straddle	8.38 dBm(802.11a) 8.23 dBm(802.11n_HT20) 9.65 dBm(802.11n_HT40) 10.80 dBm(802.11ac_VHT80)
		Antenna 1	10.68 dBm(802.11a) 11.18 dBm(802.11n_HT20) 11.77 dBm(802.11n_HT40) 10.50 dBm(802.11ac_VHT80)
		Antenna 1_Straddle	11.29 dBm(802.11a) 11.07 dBm(802.11n_HT20) 12.29 dBm(802.11n_HT40) 14.30 dBm(802.11ac_VHT80)

RF OUTPUT POWER	WLAN 5 470 MHz ~ 5 725 MHz Band	Multiple Antenna	13.00 dBm(802.11a) 13.47 dBm(802.11n_HT20) 13.89 dBm(802.11n_HT40) 13.40 dBm(802.11ac_VHT80)
		Multiple Antenna _Straddle	13.08 dBm(802.11a) 12.89 dBm(802.11n_HT20) 14.18 dBm(802.11n_HT40) 15.90 dBm(802.11ac_VHT80)
	WLAN 5 725 MHz ~ 5 850 MHz Band	Antenna 0	8.85 dBm(802.11a) 8.93 dBm(802.11n_HT20) 7.67 dBm(802.11n_HT40) 7.83 dBm(802.11ac_VHT80)
		Antenna 0_Straddle	0.54 dBm(802.11a) 0.90 dBm(802.11n_HT20) -2.66 dBm(802.11n_HT40) -4.53 dBm(802.11ac_VHT80)
		Antenna 1	10.67 dBm(802.11a) 10.78 dBm(802.11n_HT20) 10.94 dBm(802.11n_HT40) 10.77 dBm(802.11ac_VHT80)
		Antenna 1_Straddle	3.53 dBm(802.11a) 3.78 dBm(802.11n_HT20) 0.13 dBm(802.11n_HT40) -0.95 dBm(802.11ac_VHT80)
		Multiple Antenna	12.86 dBm(802.11a) 12.77 dBm(802.11n_HT20) 12.62 dBm(802.11n_HT40) 12.55 dBm(802.11ac_VHT80)
		Multiple Antenna _Straddle	5.30 dBm(802.11a) 5.58 dBm(802.11n_HT20) 1.97 dBm(802.11n_HT40) 0.63 dBm(802.11ac_VHT80)

ANTENNA TYPE	Chip Antenna		
ANTENNA GAIN	Bluetooth LE	-0.44 dBi	
	Bluetooth	-0.44 dBi	
	WLAN 2.4 GHz	Antenna 0	1.54 dBi
		Antenna 1	1.35 dBi
		Multiple Antenna	4.46 dBi
	5 150 MHz ~ 5 250 MHz Band	Antenna 0	1.00 dBi
		Antenna 1	1.25 dBi
		Multiple Antenna	4.14 dBi
	5 250 MHz ~ 5 350 MHz Band	Antenna 0	1.53 dBi
		Antenna 1	1.42 dBi
		Multiple Antenna	4.49 dBi
	5 470 MHz ~ 5 725 MHz Band	Antenna 0	1.51 dBi
		Antenna 1	1.50 dBi
		Multiple Antenna	4.52 dBi
	5 725 MHz ~ 5 850 MHz Band	Antenna 0	0.86 dBi
		Antenna 1	1.51 dBi
		Multiple Antenna	4.21 dBi
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)		40 MHz	

3.2 Alternative type(s)/model(s); also covered by this test report.

-. The following lists consist of the added model and their differences.

Model Name	Differences	Tested
WCB731M	Basic Model (2 MIC, IRB at the Top)	☒
WCB730M	This model is identical to the basic model except for the removal of MIC.	☒
WCB737M	This model is identical to the basic model except for the IRB at the Bottom	☒
WCB736M	This model is identical to the basic model except for IRB at the Bottom and the removal of MIC	☒

Note: 1. Applicant consigns only basic model to test. Therefore this test report just guarantees the units, which have been tested.

2. The Applicant/manufacture is responsible for the compliance of all variants.

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	Samsung Electronics Co Ltd	HDWB-2285 V1.0	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
WCB731M	Samsung Electronics Co Ltd	Wi-Fi/BT Transceiver (EUT)	-
HP Probook	HP	Notebook PC	EUT
PPP009L-E	LIE-ON TECHNOLOGY (CHANGZHOU)CO.,LTD.	AC Adapter	-

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting mode is programmed.

-. Frequency / Channel Operations

		Channel	Frequency
802.11a 802.11n 802.11ac(20 MHz)	Band 1	36	5 180
		44	5 220
		48	5 240
	Band 2A	52	5 260
		60	5 300
		64	5 320
	Band 2C	100	5 500
		116	5 580
		140	5 700
	Straddle	144	5 720
	Band 3	149	5 745
		157	5 785
		165	5 825
802.11n 802.11ac(40 MHz)	Band 1	38	5 190
		46	5 230
	Band 2A	54	5 270
		62	5 310
	Band 2C	102	5 510
		110	5 550
		134	5 670
	Straddle	142	5 710
	Band 3	151	5 755
		5 795	5 795
802.11ac(80 MHz)	Band 1	42	5 210
	Band 2A	58	5 290
	Band 2C	106	5 530
	Straddle	138	5 690
	Band 3	155	5 775

UNII 1

Modulation	DATA RATE	OUTPUT POWER[dBm]	
		Antenna 0	Antenna 1
802.11 a (Middle Channel)	6 Mbps	8.25	8.98
	9 Mbps	8.22	8.97
	12 Mbps	8.20	8.95
	18 Mbps	8.19	8.95
	24 Mbps	7.67	8.13
	36 Mbps	7.66	8.11
	48 Mbps	6.66	6.97
	54 Mbps	5.51	5.90
HT 20 (Middle Channel)	6.5 Mbps	8.05	8.44
	13 Mbps	8.01	8.43
	19.5 Mbps	8.01	8.41
	26 Mbps	7.99	8.40
	39 Mbps	7.98	8.38
	52 Mbps	7.22	7.58
	58.5 Mbps	5.23	6.00
	65 Mbps	5.22	5.83
HT 40 (Low Channel)	13.5 Mbps	10.33	10.13
	27 Mbps	10.32	10.12
	40.5 Mbps	10.30	10.10
	54 Mbps	10.30	10.08
	81 Mbps	10.29	10.07
	108 Mbps	9.12	8.91
	121.5 Mbps	7.58	7.48
	135 Mbps	7.50	7.34

VHT80 (Middle Channel)	29.3 Mbps	8.88	9.22
	58.5 Mbps	8.85	9.20
	87.8 Mbps	8.85	9.18
	117 Mbps	8.83	9.17
	175.5 Mbps	8.82	9.17
	234 Mbps	8.05	8.21
	263.3 Mbps	8.03	8.20
	292.5 Mbps	5.95	6.52
	351 Mbps	5.90	6.47
	390 Mbps	5.88	6.40

- The worse case data rate for each modulation is determined 6 Mbps(Ant.0/Ant.1) for IEEE 802.11a, 6.5 Mbps(Ant.0/Ant.1) for HT20, 13.5 Mbps(Ant.0/Ant.1) for HT40, 29.3 Mbps(Ant.0/Ant.1) for VHT80.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is "XY" axis.

UNII 2A

Modulation	DATA RATE	OUTPUT POWER[dBm]	
		Antenna 0	Antenna 1
802.11 a (Middle Channel)	6 Mbps	9.82	8.91
	9 Mbps	9.78	8.88
	12 Mbps	9.78	8.87
	18 Mbps	9.76	8.85
	24 Mbps	9.05	8.05
	36 Mbps	9.01	8.05
	48 Mbps	7.81	7.13
	54 Mbps	6.81	6.26
HT 20 (Middle Channel)	6.5 Mbps	9.66	8.81
	13 Mbps	9.63	8.77
	19.5 Mbps	9.62	8.77
	26 Mbps	9.62	8.75
	39 Mbps	9.60	8.74
	52 Mbps	8.75	7.95
	58.5 Mbps	6.70	5.95
	65 Mbps	6.66	5.77
HT 40 (Low Channel)	13.5 Mbps	9.05	8.88
	27 Mbps	9.02	8.85
	40.5 Mbps	9.01	8.83
	54 Mbps	8.99	8.82
	81 Mbps	8.99	8.78
	108 Mbps	8.08	7.97
	121.5 Mbps	6.05	6.10
	135 Mbps	5.95	5.99

VHT80 (Middle Channel)	29.3 Mbps	10.53	10.35
	58.5 Mbps	10.50	10.32
	87.8 Mbps	10.49	10.32
	117 Mbps	10.47	10.31
	175.5 Mbps	10.46	10.30
	234 Mbps	9.50	9.43
	263.3 Mbps	9.50	9.41
	292.5 Mbps	7.70	7.63
	351 Mbps	7.62	7.54
	390 Mbps	7.58	7.50

- The worse case data rate for each modulation is determined 6 Mbps(Ant.0/Ant.1) for IEEE 802.11a, 6.5 Mbps(Ant.0/Ant.1) for HT20, 13.5 Mbps(Ant.0/Ant.1) for HT40, 29.3 Mbps(Ant.0/Ant.1) for VHT80.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is "XY" axis.

UNII 2C

Modulation	DATA RATE	OUTPUT POWER[dBm]	
		Antenna 0	Antenna 1
802.11 a (Middle Channel)	6 Mbps	8.87	10.68
	9 Mbps	8.86	10.65
	12 Mbps	8.85	10.64
	18 Mbps	8.82	10.64
	24 Mbps	8.18	9.78
	36 Mbps	7.58	9.77
	48 Mbps	6.72	8.78
	54 Mbps	5.80	7.77
HT 20 (Middle Channel)	6.5 Mbps	8.72	11.18
	13 Mbps	8.70	11.17
	19.5 Mbps	8.68	11.16
	26 Mbps	8.66	11.13
	39 Mbps	8.66	11.13
	52 Mbps	8.01	10.37
	58.5 Mbps	5.95	8.52
	65 Mbps	5.91	8.44
HT 40 (Low Channel)	13.5 Mbps	9.77	11.77
	27 Mbps	9.75	11.75
	40.5 Mbps	9.74	11.75
	54 Mbps	9.74	11.74
	81 Mbps	9.72	11.72
	108 Mbps	8.80	11.03
	121.5 Mbps	7.05	9.28
	135 Mbps	7.00	9.22

VHT80 (Middle Channel)	29.3 Mbps	10.28	10.50
	58.5 Mbps	10.26	10.48
	87.8 Mbps	10.25	10.47
	117 Mbps	10.23	10.46
	175.5 Mbps	10.22	10.46
	234 Mbps	9.32	9.67
	263.3 Mbps	9.30	9.61
	292.5 Mbps	7.55	7.66
	351 Mbps	7.50	7.64
	390 Mbps	7.48	7.60

- The worse case data rate for each modulation is determined 6 Mbps(Ant.0/Ant.1) for IEEE 802.11a, 6.5 Mbps(Ant.0/Ant.1) for HT20, 13.5 Mbps(Ant.0/Ant.1) for HT40, 29.3 Mbps(Ant.0/Ant.1) for VHT80.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is "XY" axis.

UNII 3

Modulation	DATA RATE	OUTPUT POWER[dBm]	
		Antenna 0	Antenna 1
802.11 a (Middle Channel)	6 Mbps	7.82	10.55
	9 Mbps	7.80	10.52
	12 Mbps	7.77	10.52
	18 Mbps	7.76	10.51
	24 Mbps	6.81	9.78
	36 Mbps	6.77	9.76
	48 Mbps	5.91	8.96
	54 Mbps	4.99	8.18
HT 20 (Middle Channel)	6.5 Mbps	8.30	10.50
	13 Mbps	8.28	10.48
	19.5 Mbps	8.28	10.47
	26 Mbps	8.27	10.47
	39 Mbps	8.25	10.43
	52 Mbps	7.36	9.78
	58.5 Mbps	5.36	7.77
	65 Mbps	5.35	7.70
HT 40 (Low Channel)	13.5 Mbps	7.67	10.94
	27 Mbps	7.66	10.91
	40.5 Mbps	7.63	10.90
	54 Mbps	7.61	10.88
	81 Mbps	7.60	10.88
	108 Mbps	6.78	10.13
	121.5 Mbps	4.85	8.02
	135 Mbps	4.77	7.93

VHT80 (Middle Channel)	29.3 Mbps	7.83	10.77
	58.5 Mbps	7.80	10.76
	87.8 Mbps	7.80	10.76
	117 Mbps	7.79	10.73
	175.5 Mbps	7.76	10.71
	234 Mbps	6.70	9.89
	263.3 Mbps	6.66	9.85
	292.5 Mbps	4.80	8.15
	351 Mbps	4.78	8.10
	390 Mbps	4.77	8.08

- The worse case data rate for each modulation is determined 6 Mbps(Ant.0/Ant.1) for IEEE 802.11a, 6.5 Mbps(Ant.0/Ant.1) for HT20, 13.5 Mbps(Ant.0/Ant.1) for HT40, 29.3 Mbps(Ant.0/Ant.1) for VHT80.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is "XY" axis.

- Duty Cycle

	Band	Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Antenna 0	UNII 1	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
	UNII 2A	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
	UNII 2C	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
	UNII 3	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
Antenna 1	UNII 1	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
	UNII 2A	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
	UNII 2C	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
	UNII 3	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

	Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Staddle	802.11 a	-	-	100.00	-
	802.11 HT 20	-	-	100.00	-
	802.11 HT 40	-	-	100.00	-
	802.11 VHT 80	-	-	100.00	-


Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100

Correction Factor : $10 * \log(1 / (\text{Duty Cycle} / 100))$

-. Test Plot

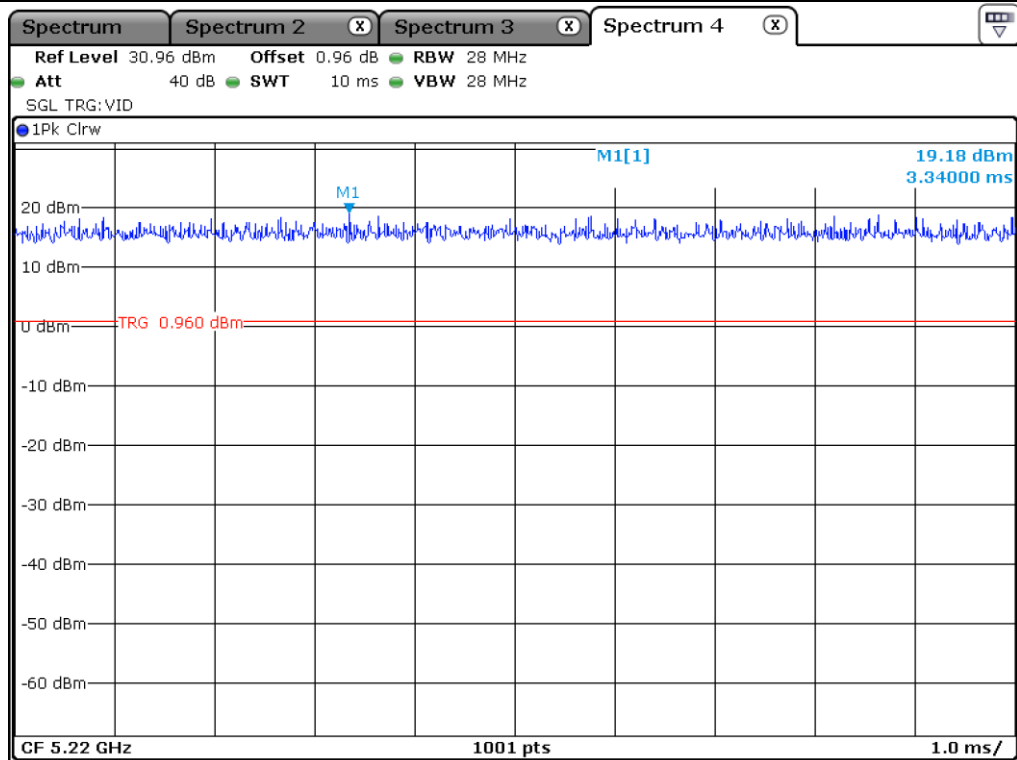

UNII 1_802.11 a_Antenna 0

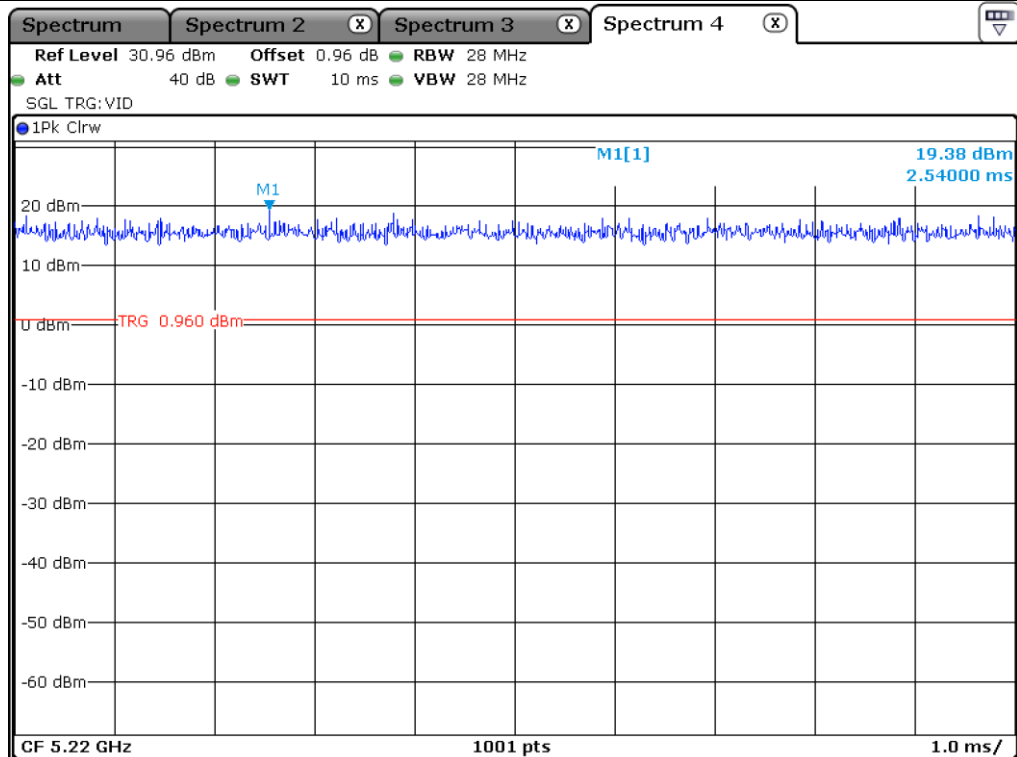


UNII 1_802.11 HT 20_Antenna 0

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

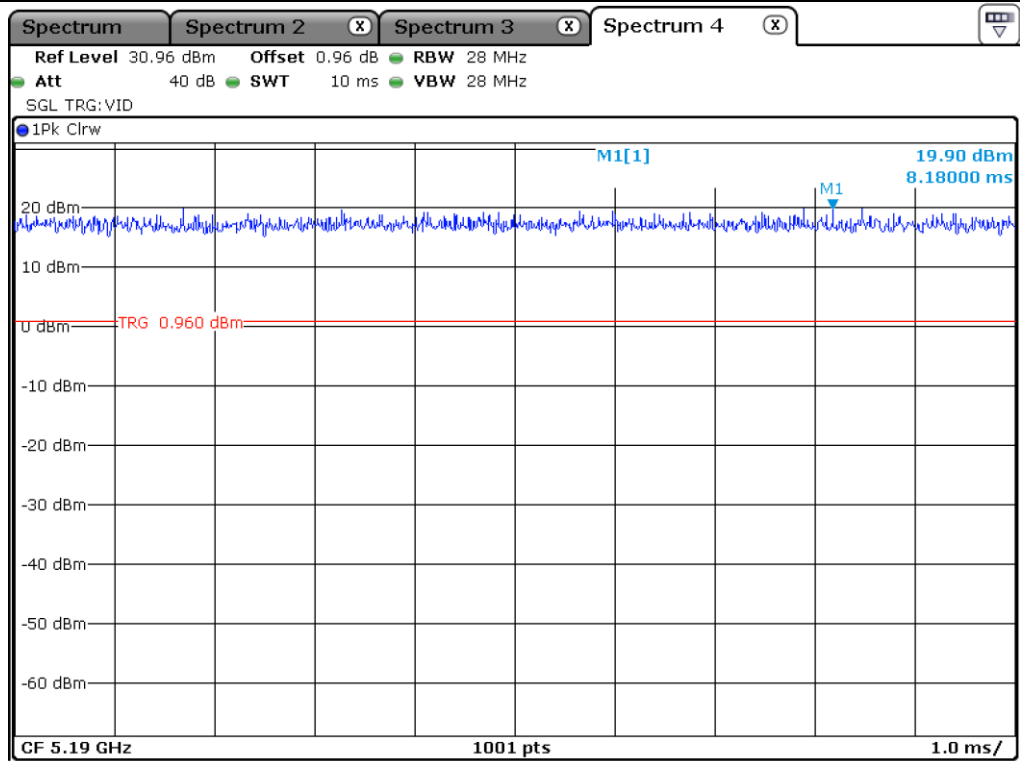


UNII 1_802.11 HT40_Antenna 0

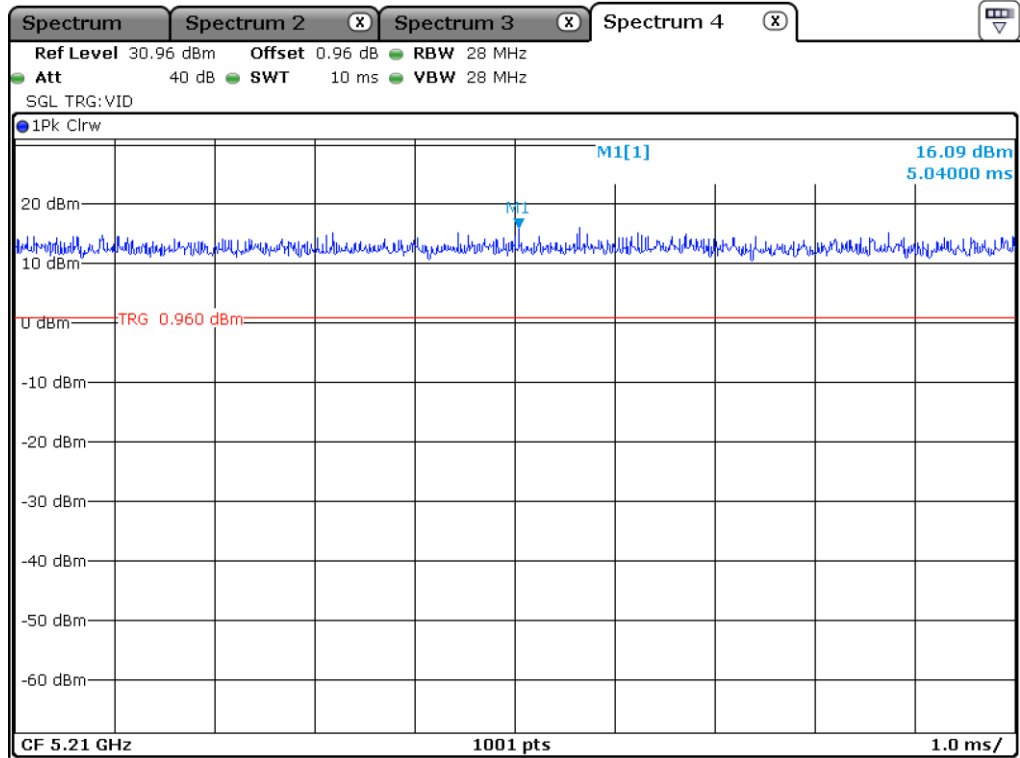

UNII 1_802.11 VHT 80_Antenna 0

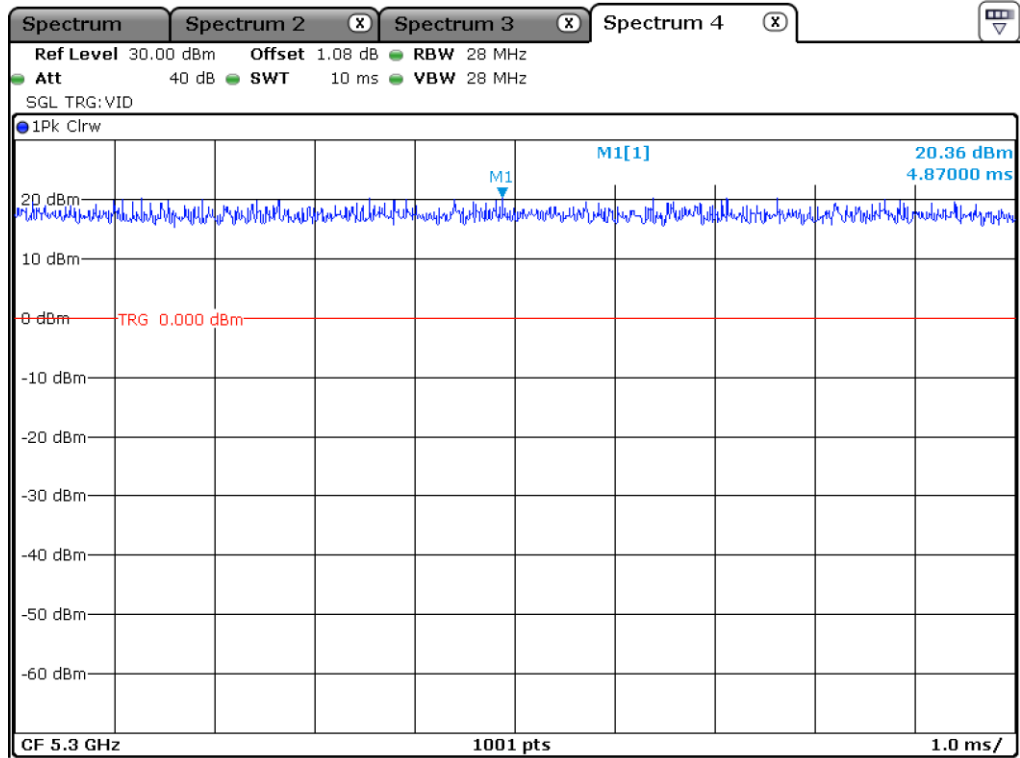

UNII 2A_802.11 a_Antenna 0

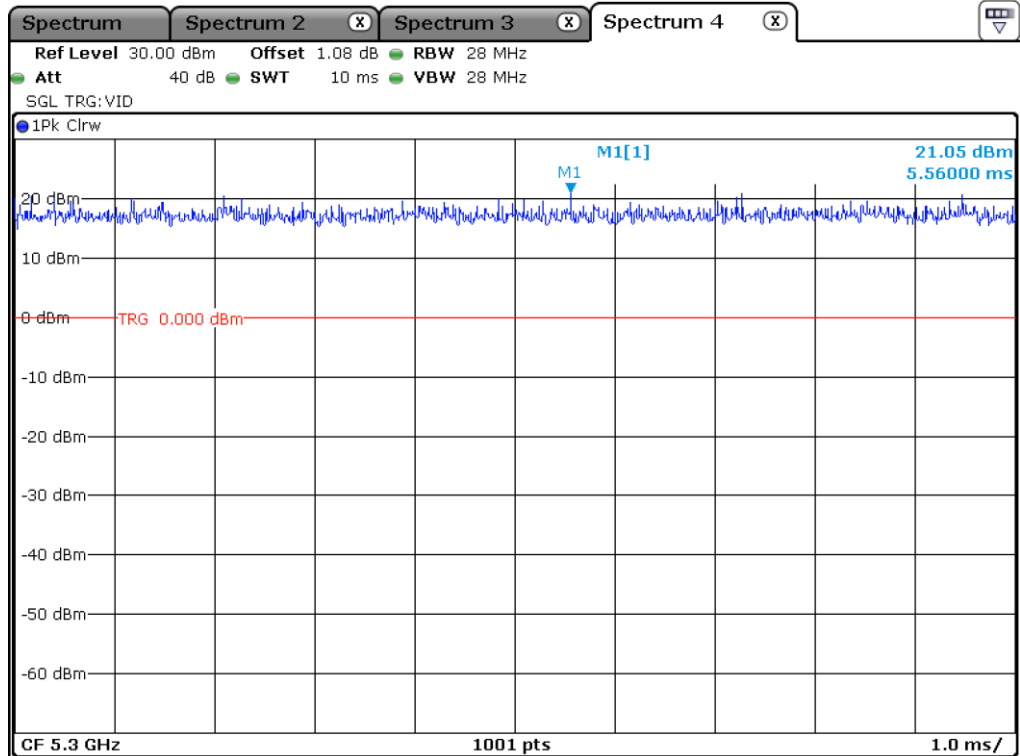


UNII 2A_802.11 HT 20_Antenna 0

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

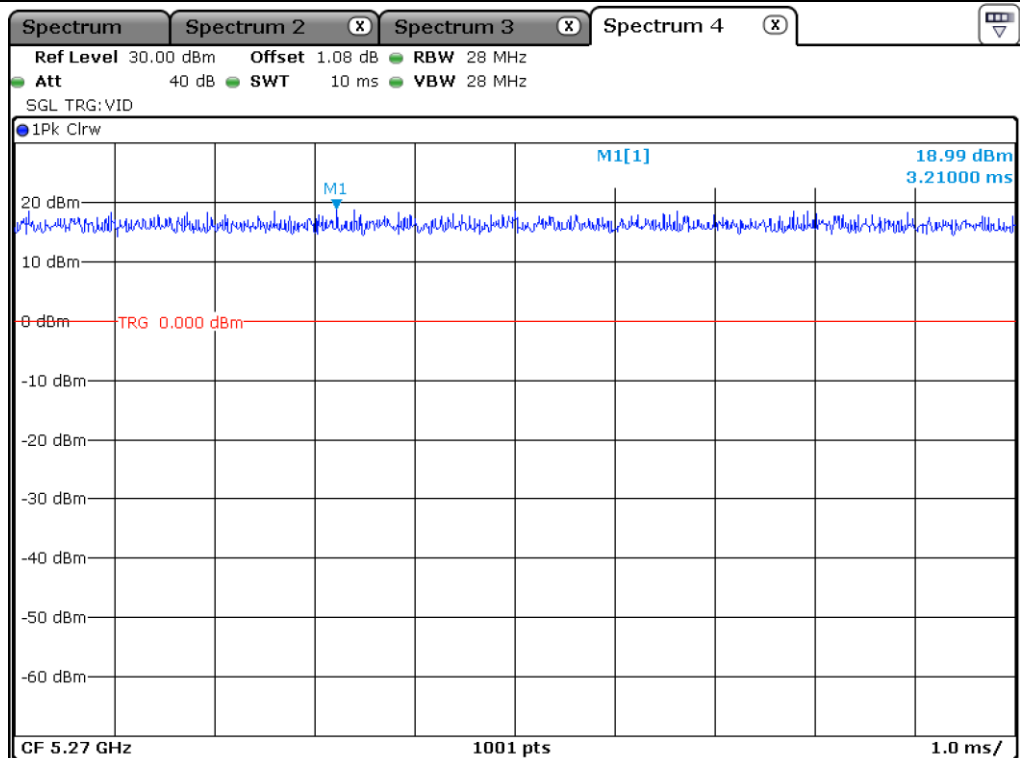

UNII 2A_802.11 HT40_Antenna 0

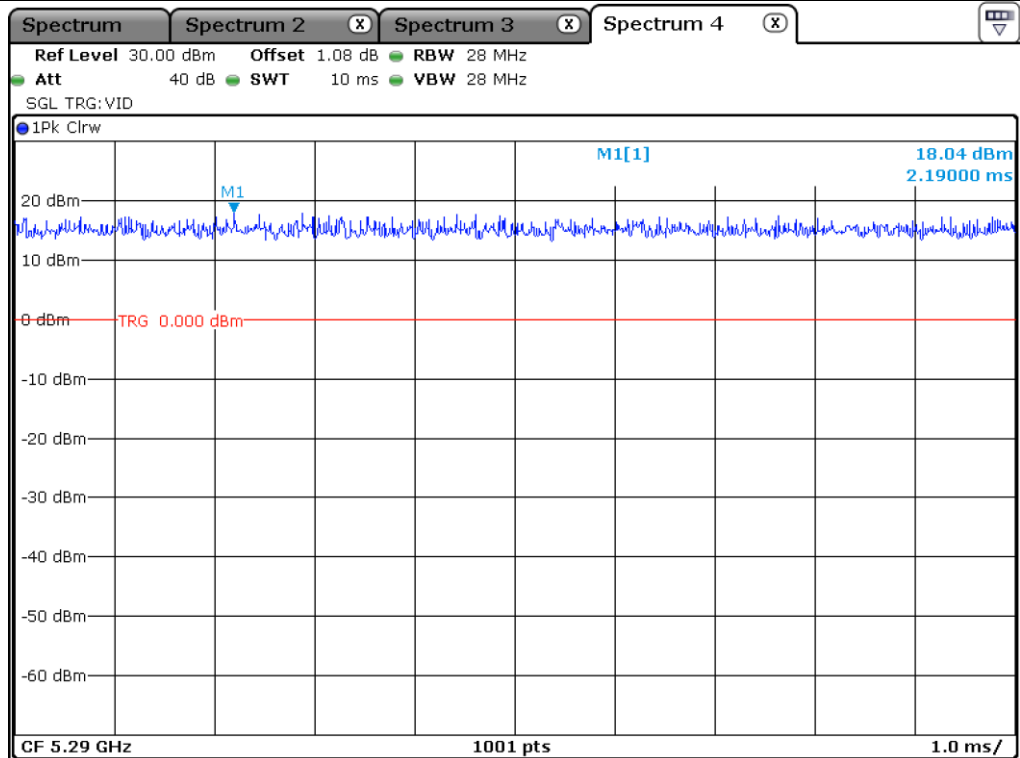


UNII 2A_802.11 VHT 80_Antenna 0

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

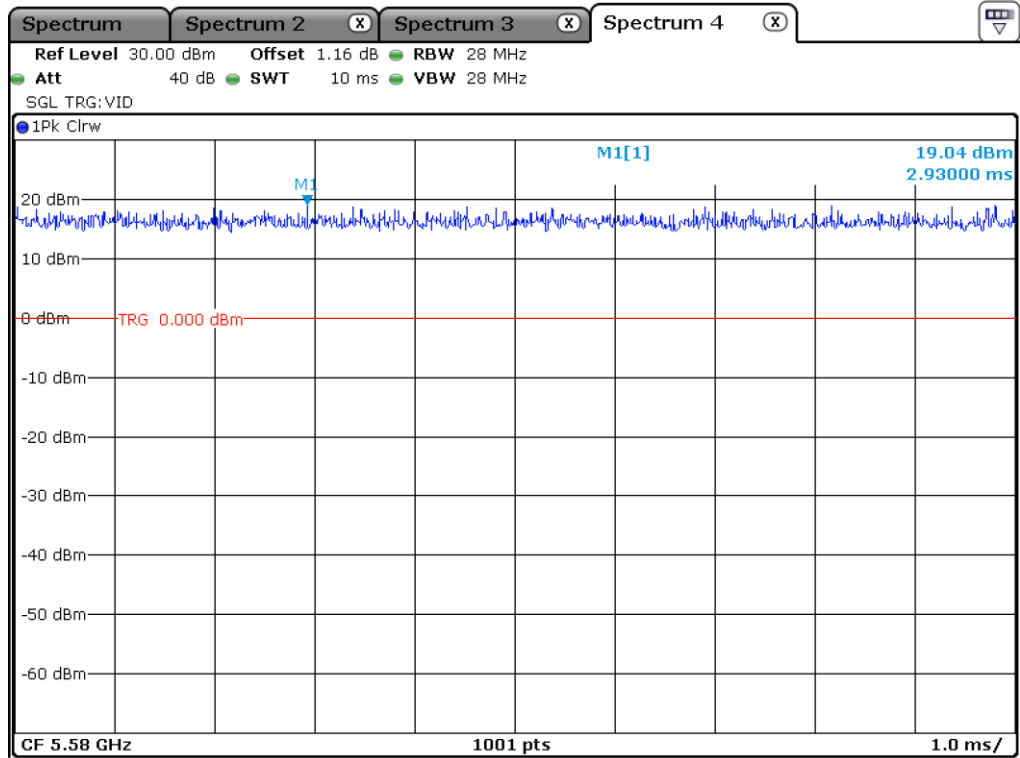

UNII 2C_802.11 a_Antenna 0

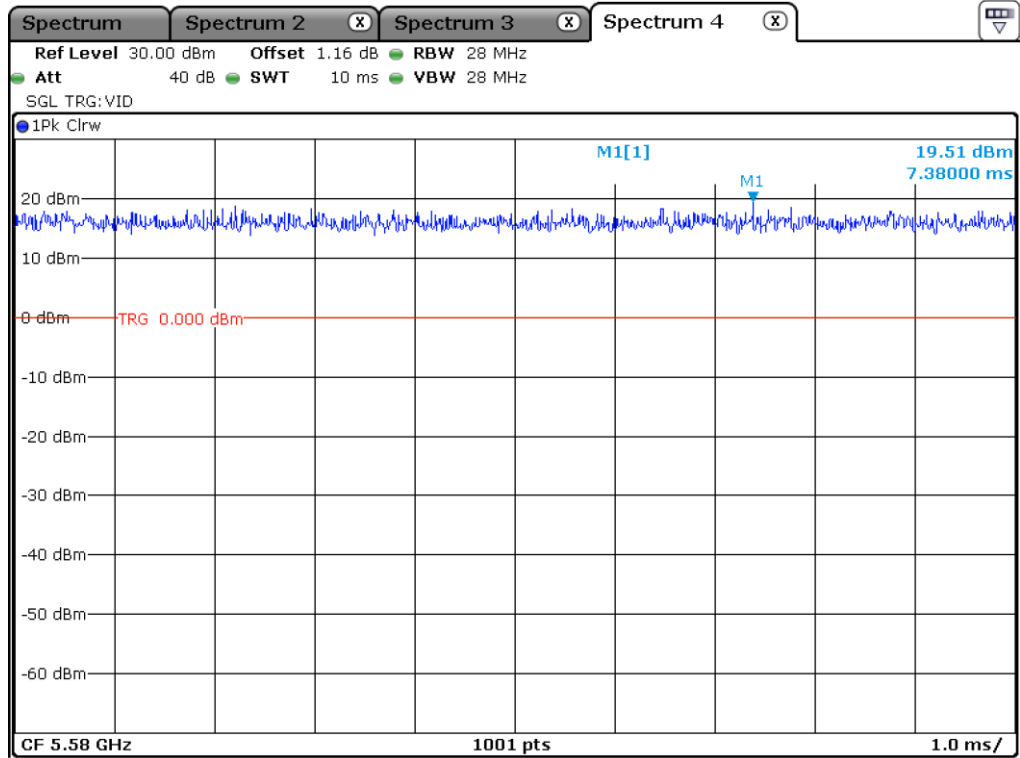


UNII 2C_802.11 HT 20_Antenna 0

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

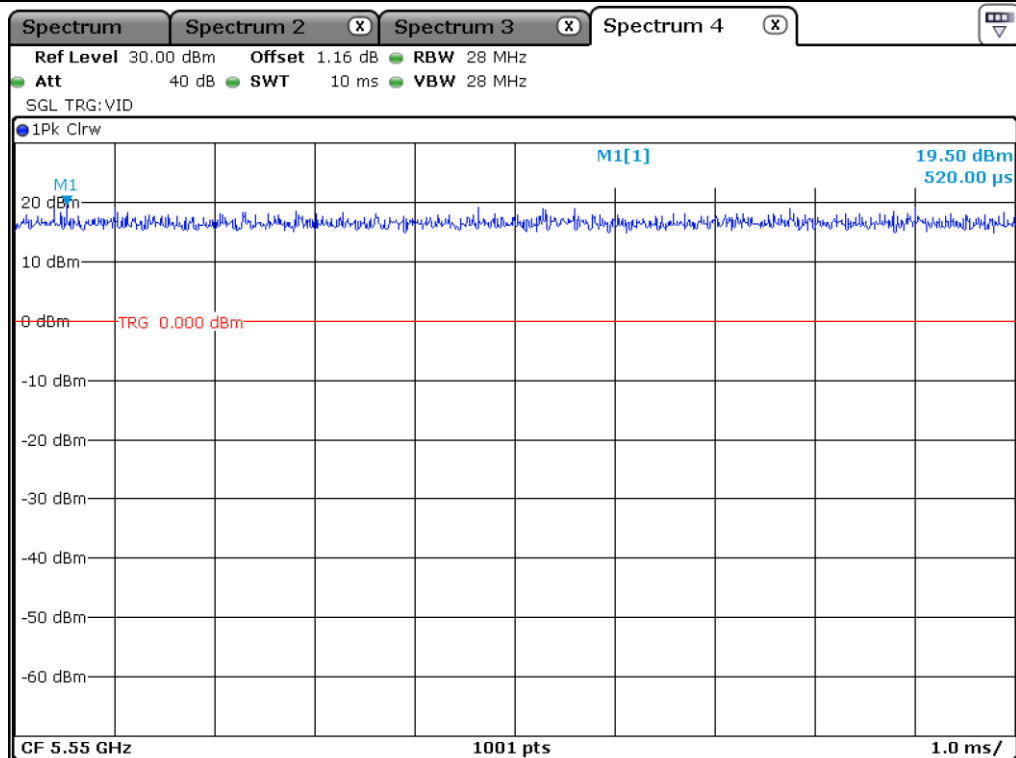


UNII 2C_802.11 HT40_Antenna 0

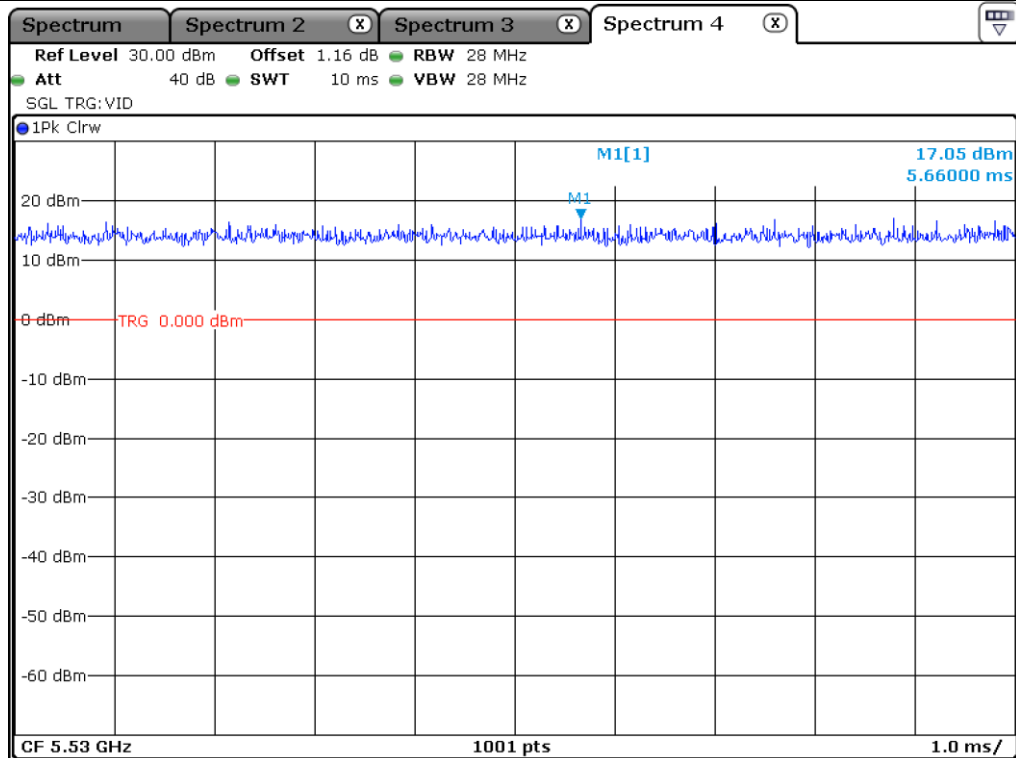

UNII 2C_802.11 VHT 80_Antenna 0

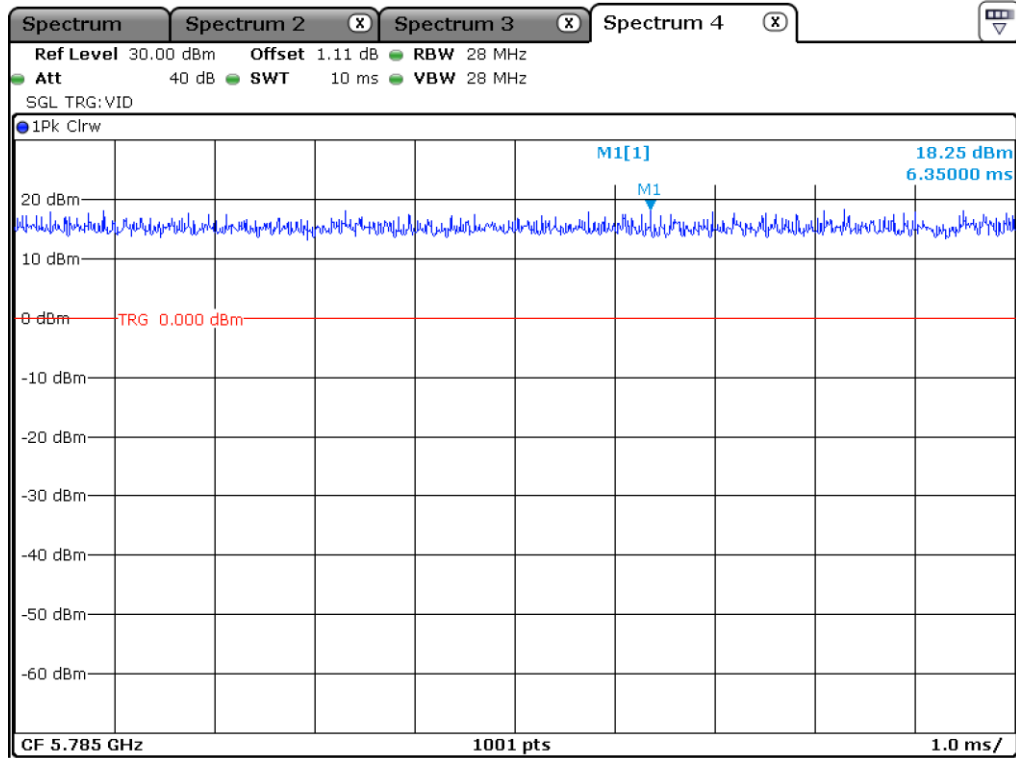

UNII 3_802.11 a_Antenna 0

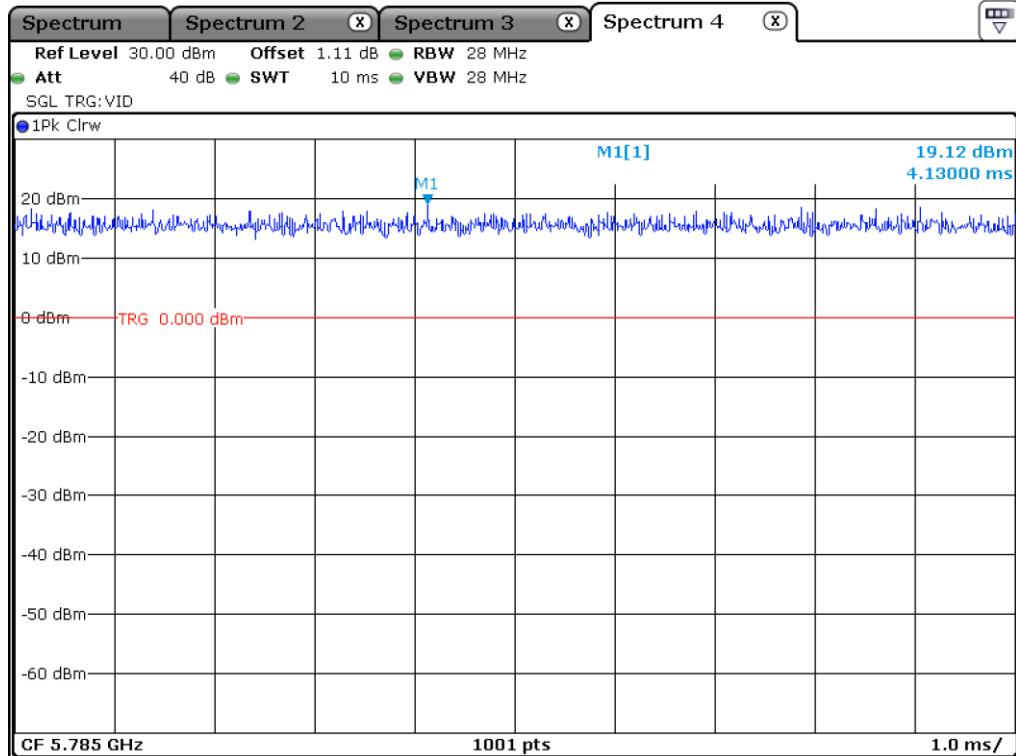


UNII 3_802.11 HT 20_Antenna 0

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

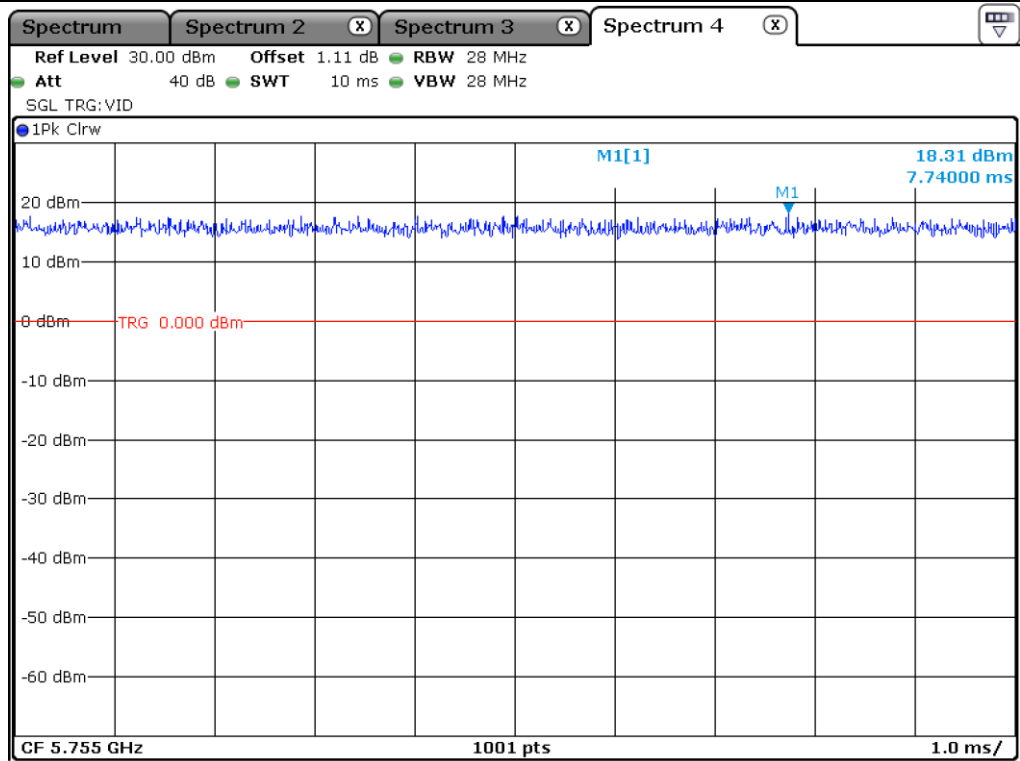

UNII 3_802.11 HT40_Antenna 0

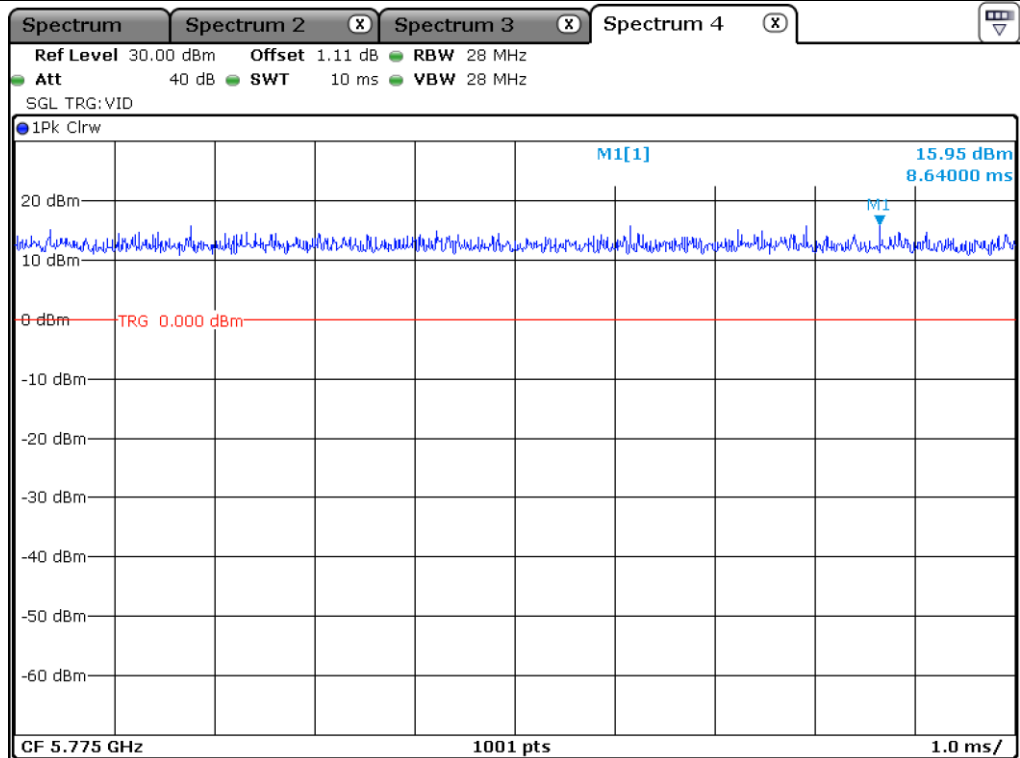


UNII 3_802.11 VHT 80_Antenna 0

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

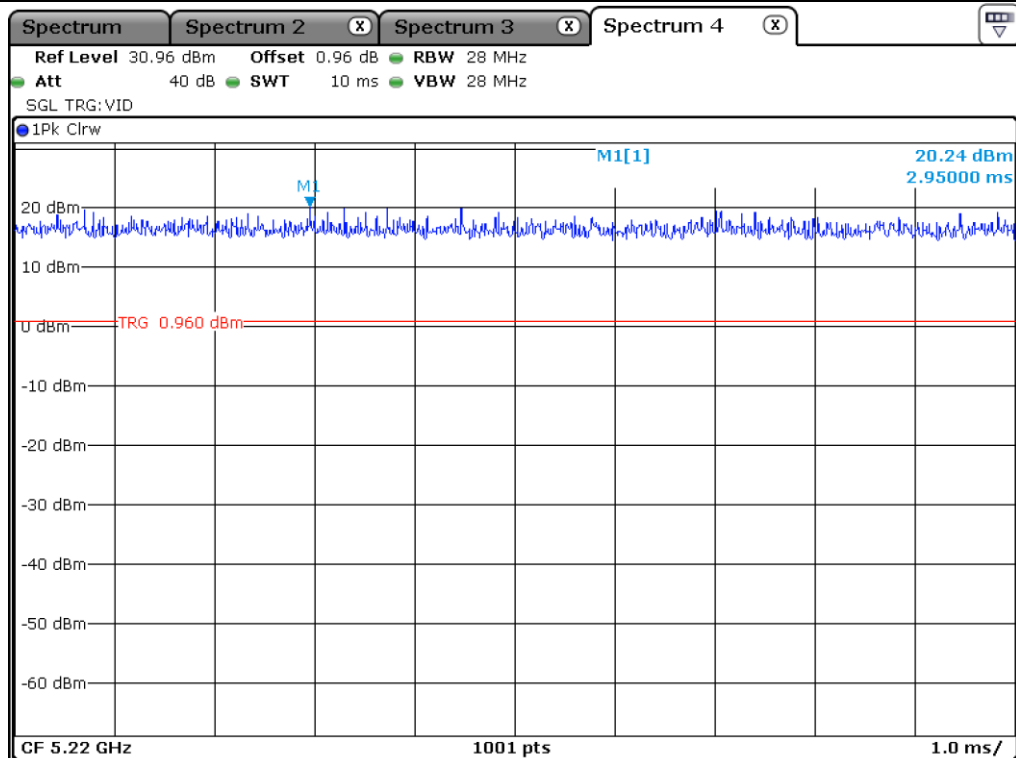

UNII 1_802.11 a_Antenna 1

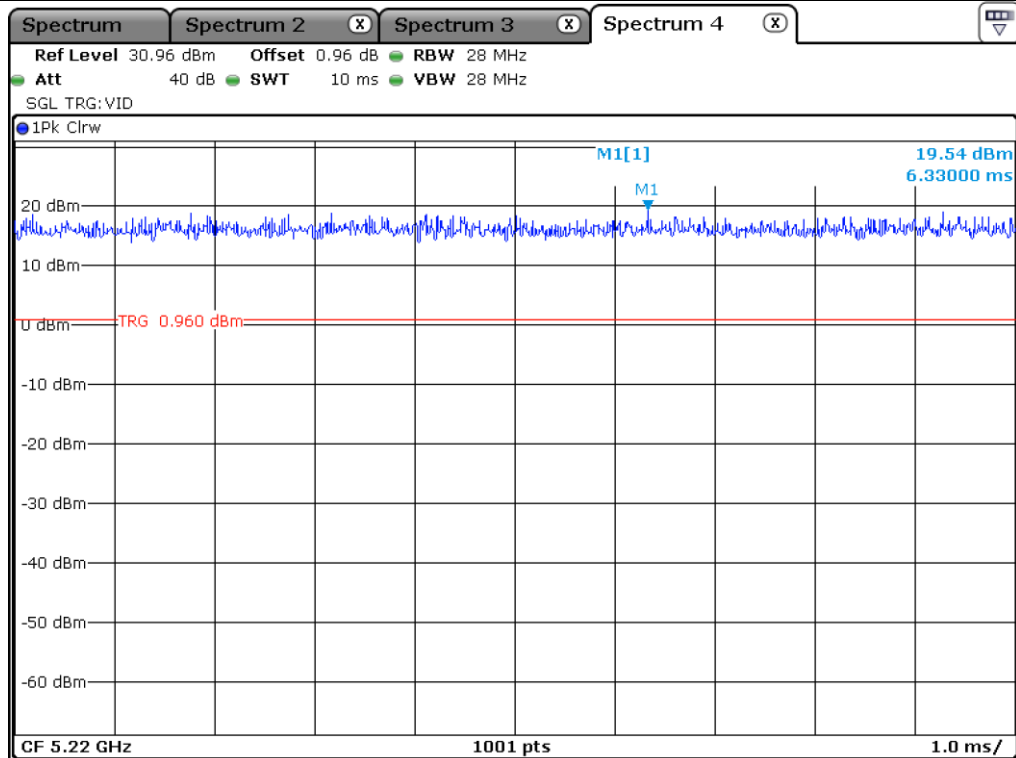


UNII 1_802.11 HT 20_Antenna 1

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

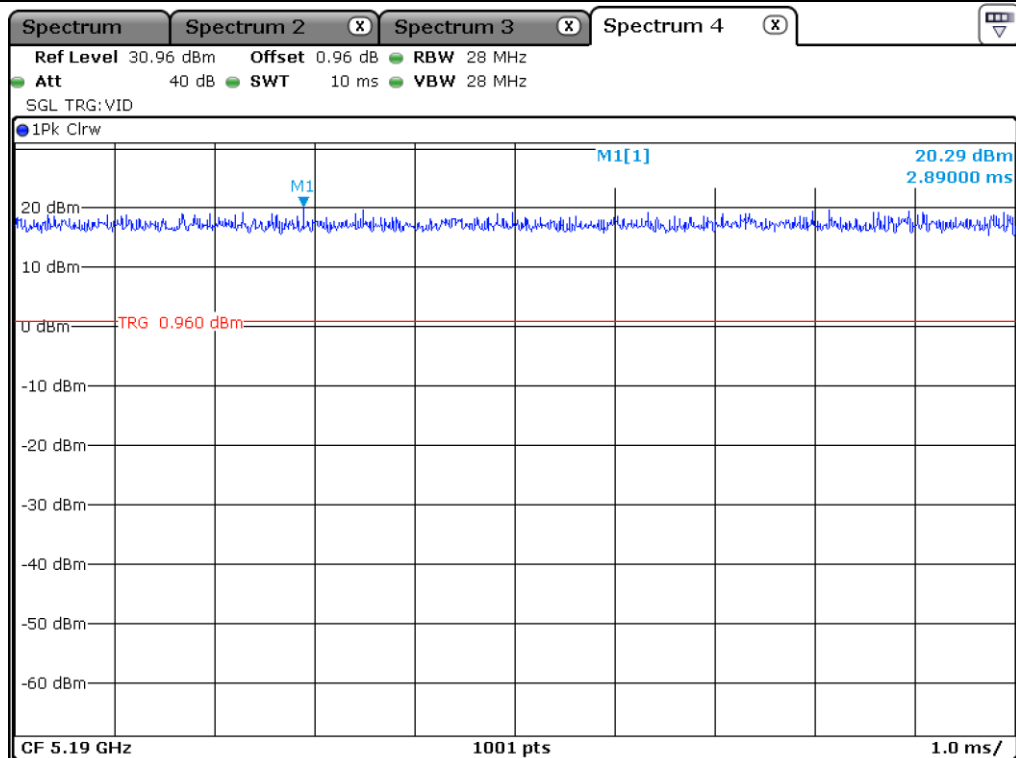

UNII 1_802.11 HT40_Antenna 1

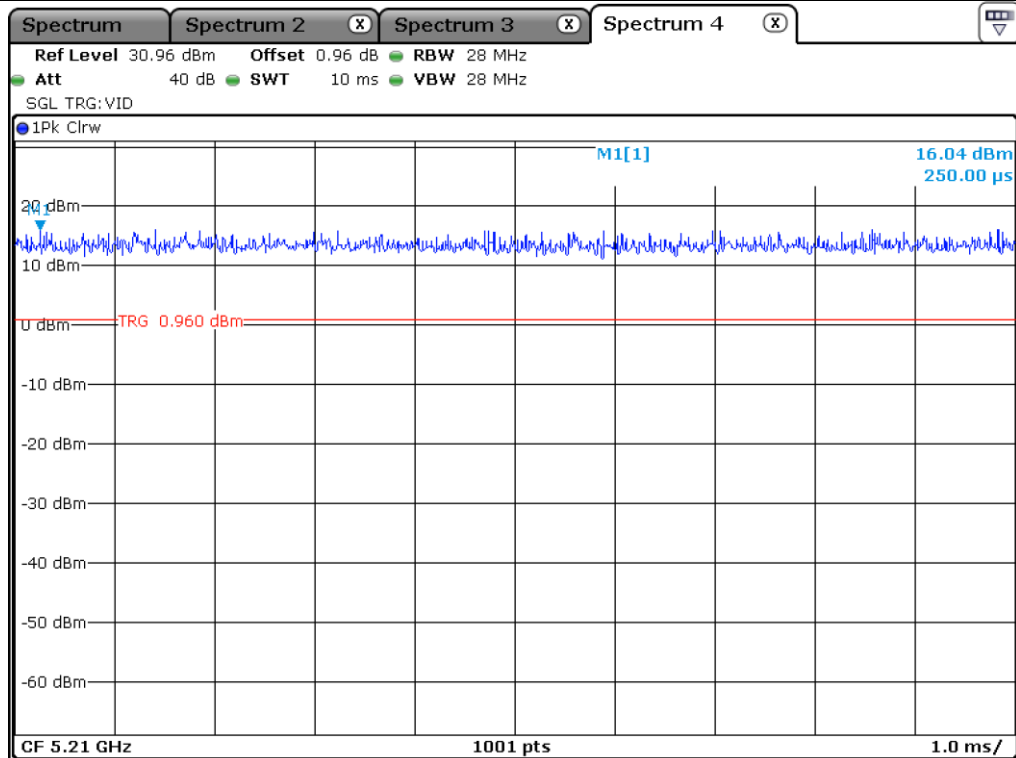


UNII 1_802.11 VHT 80_Antenna 1

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

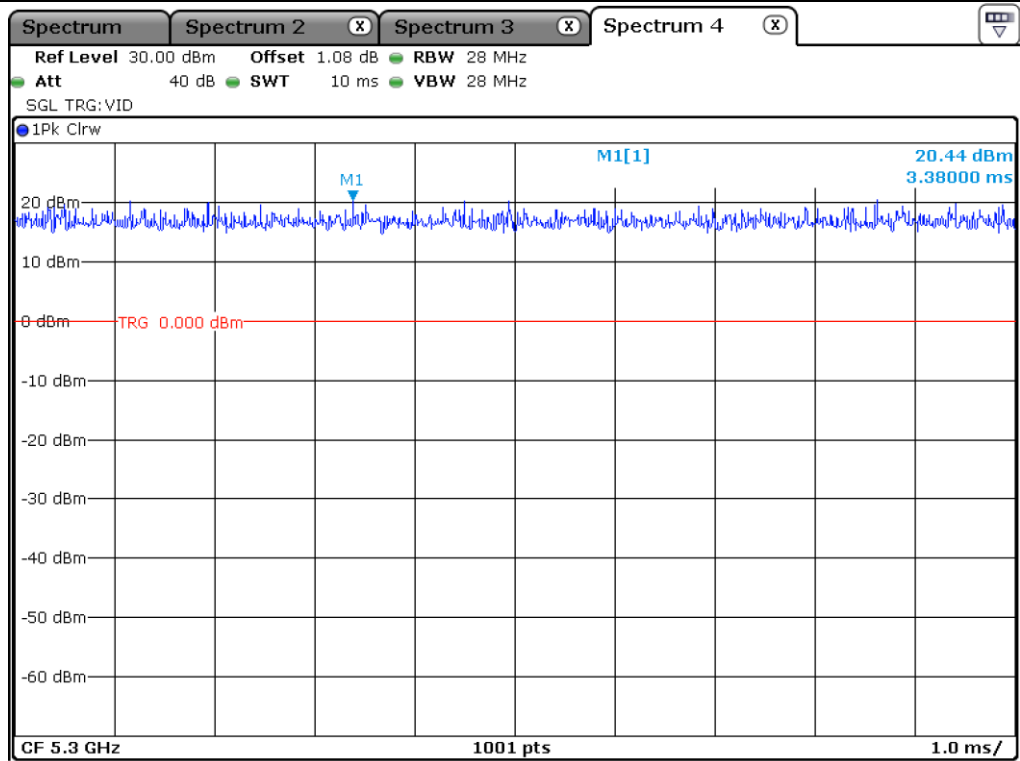

UNII 2A_802.11 a_Antenna 1

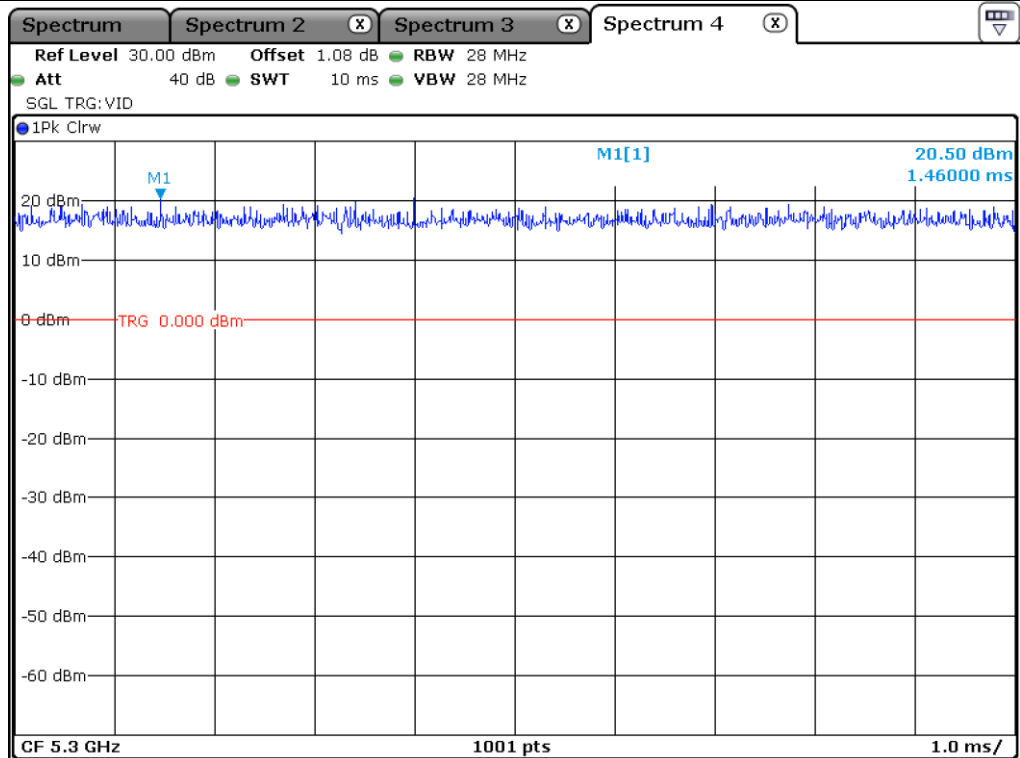


UNII 2A_802.11 HT 20_Antenna 1

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

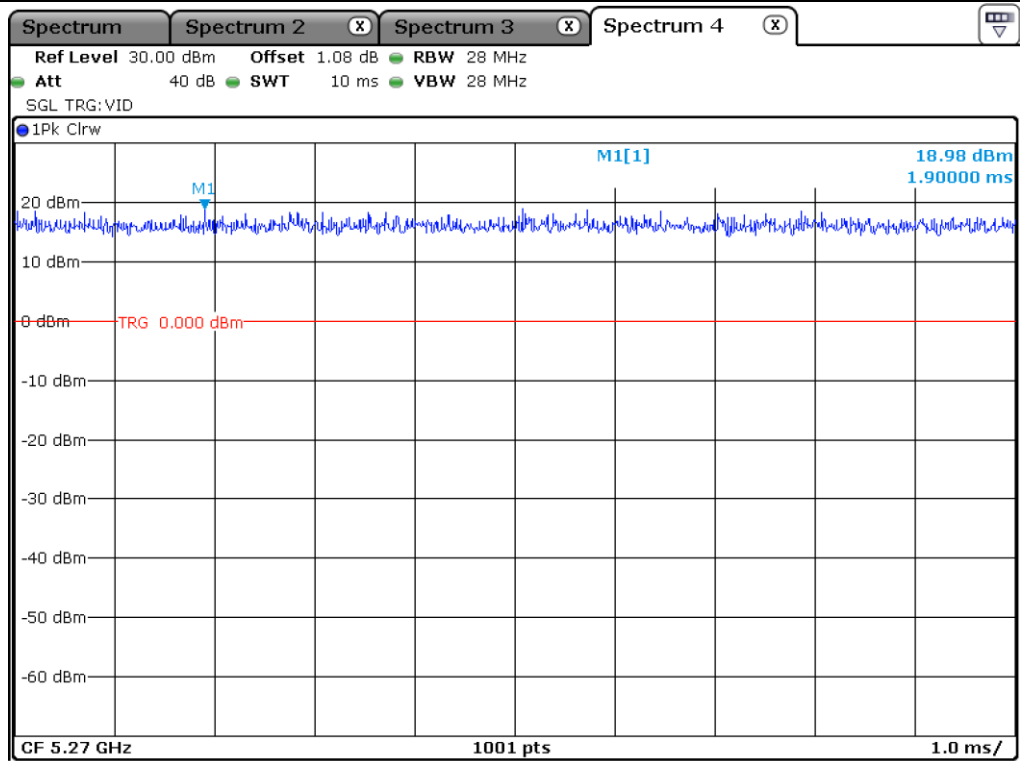


UNII 2A_802.11 HT40_Antenna 1

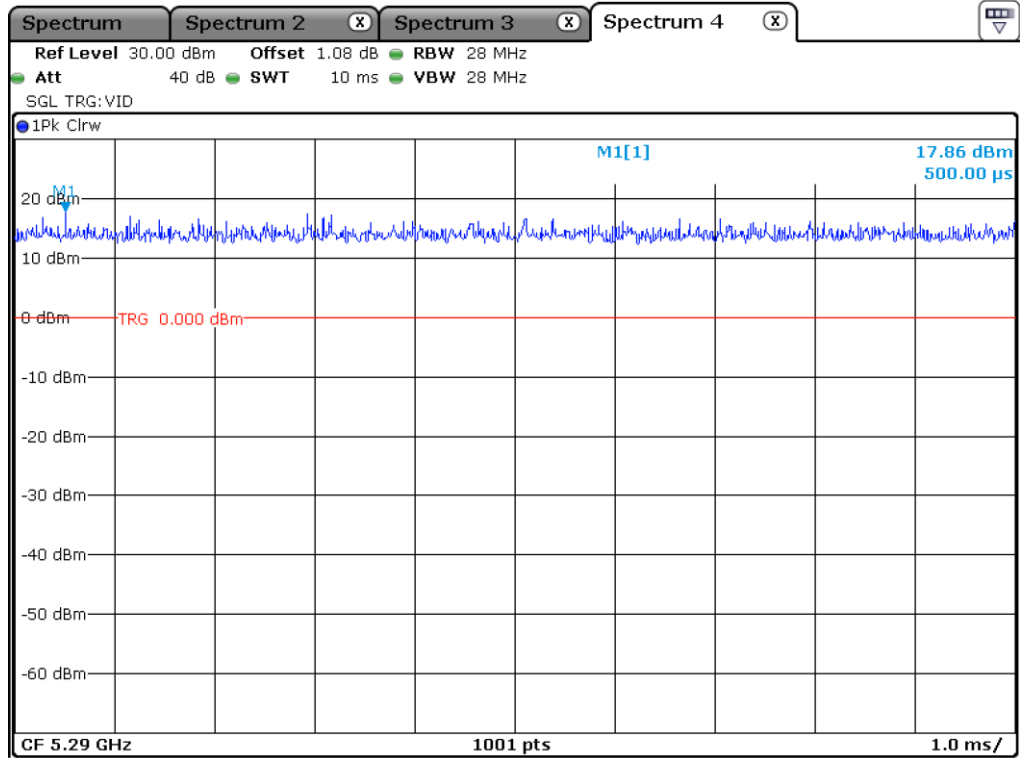

UNII 2A_802.11 VHT 80_Antenna 1

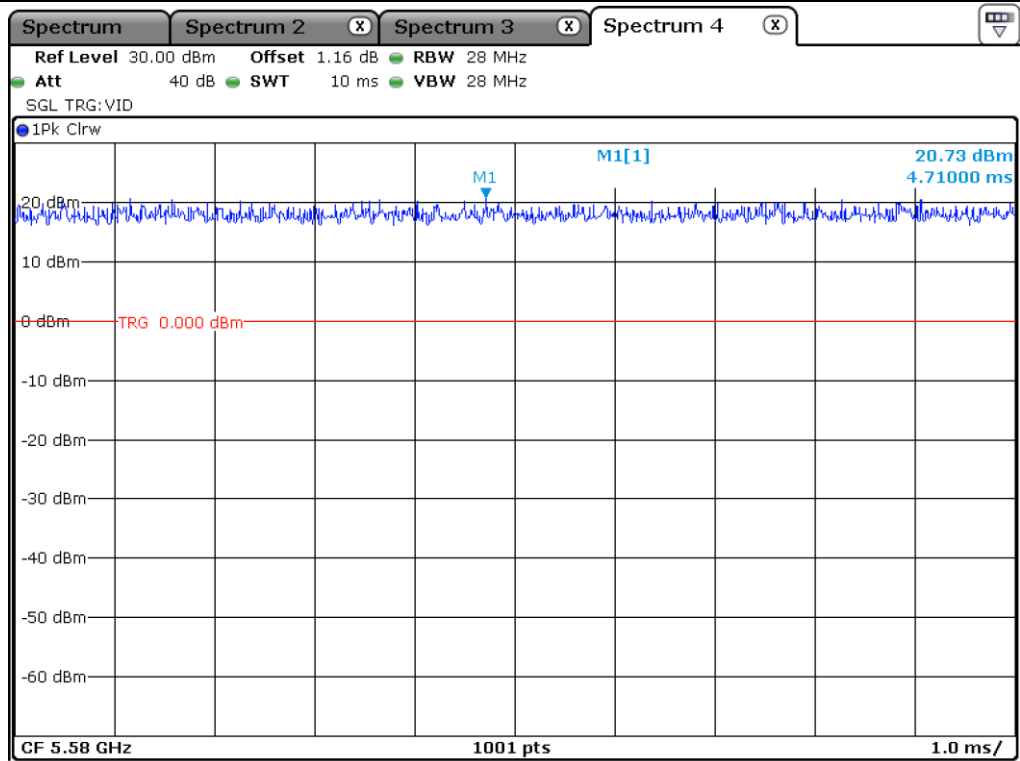

UNII 2C_802.11 a_Antenna 1

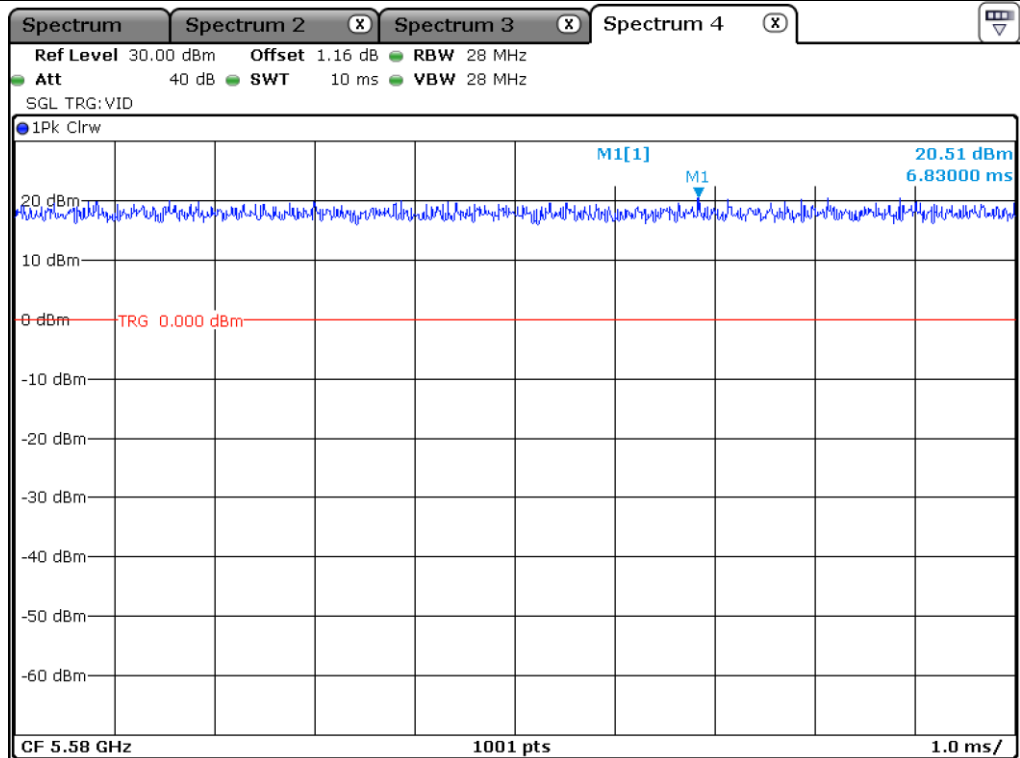


UNII 2C_802.11 HT 20_Antenna 1

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

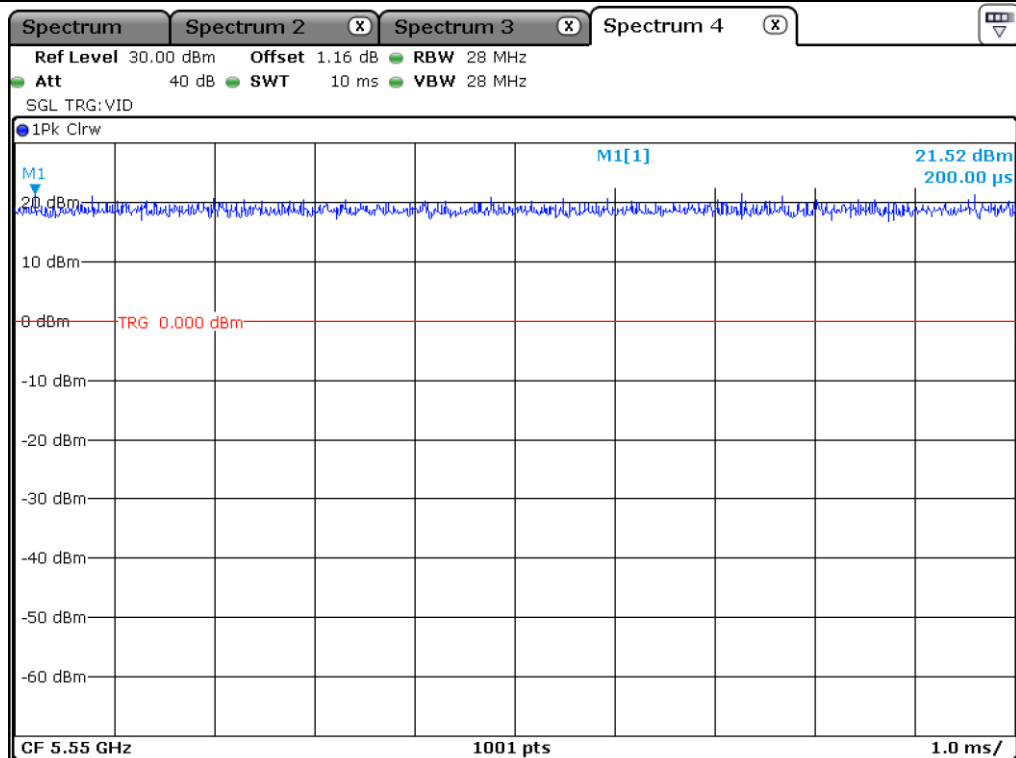


UNII 2C_802.11 HT40_Antenna 1

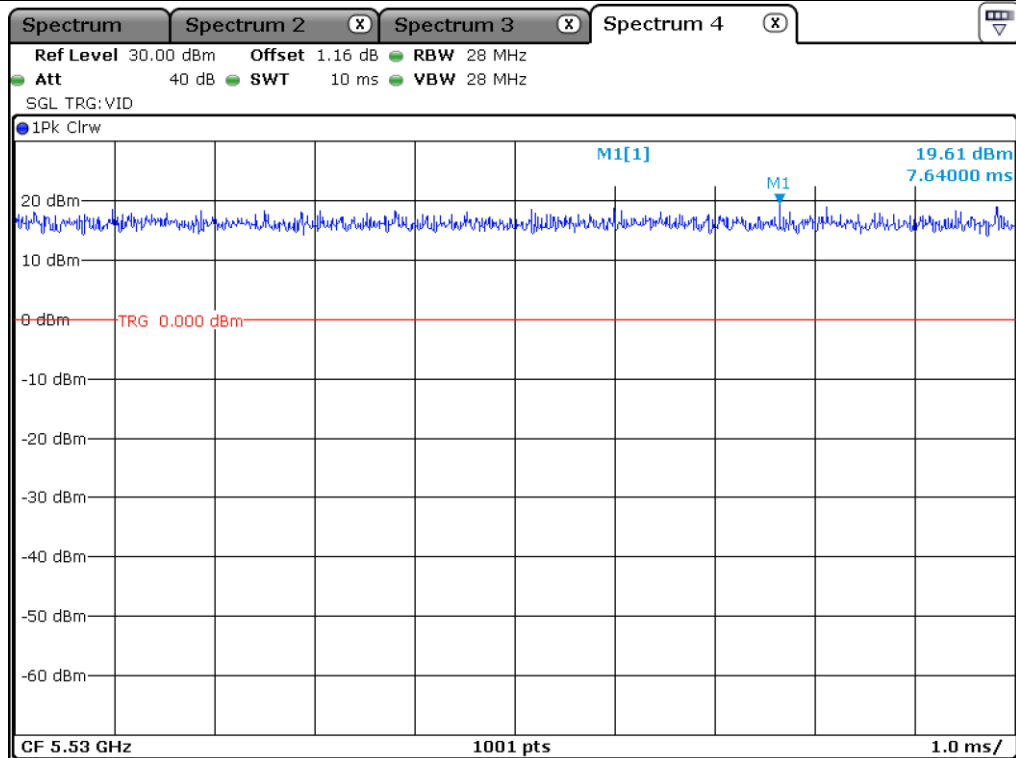

UNII 2C_802.11 VHT 80_Antenna 1

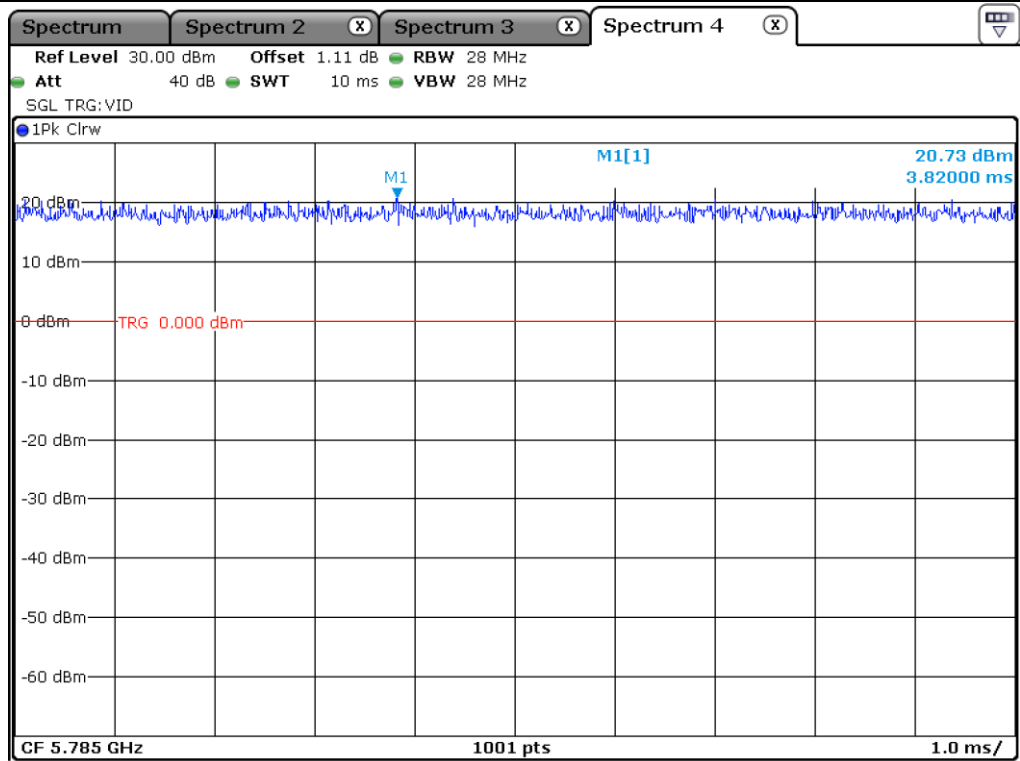

UNII 3_802.11 a_Antenna 1

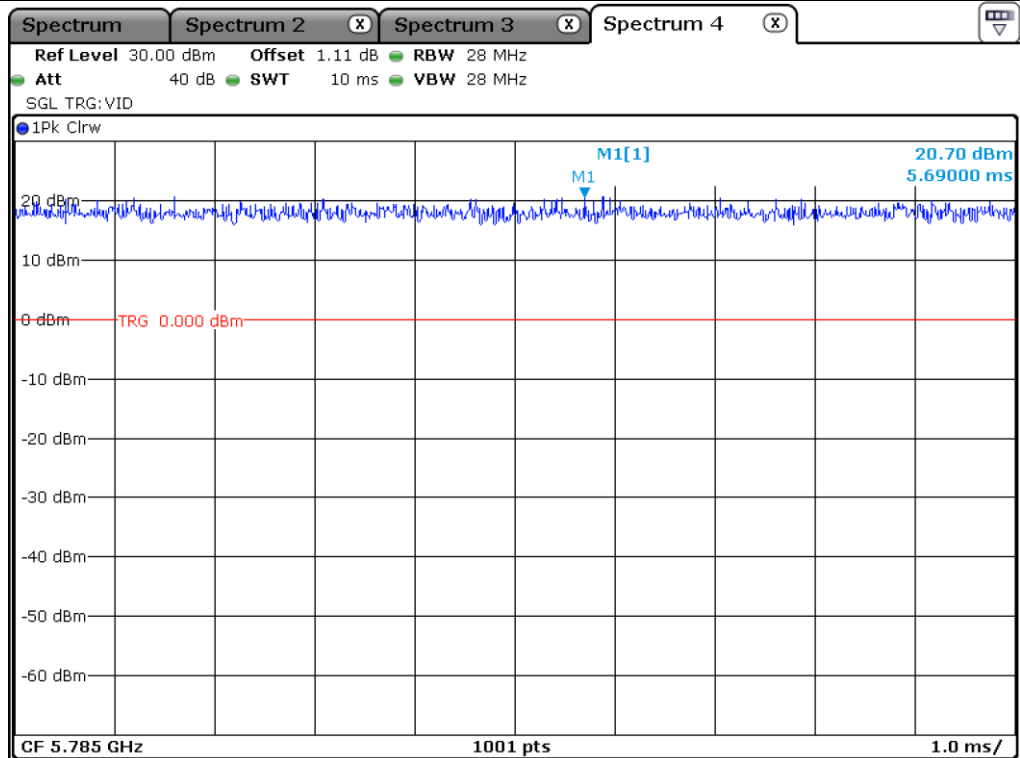


UNII 3_802.11 HT 20_Antenna 1

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

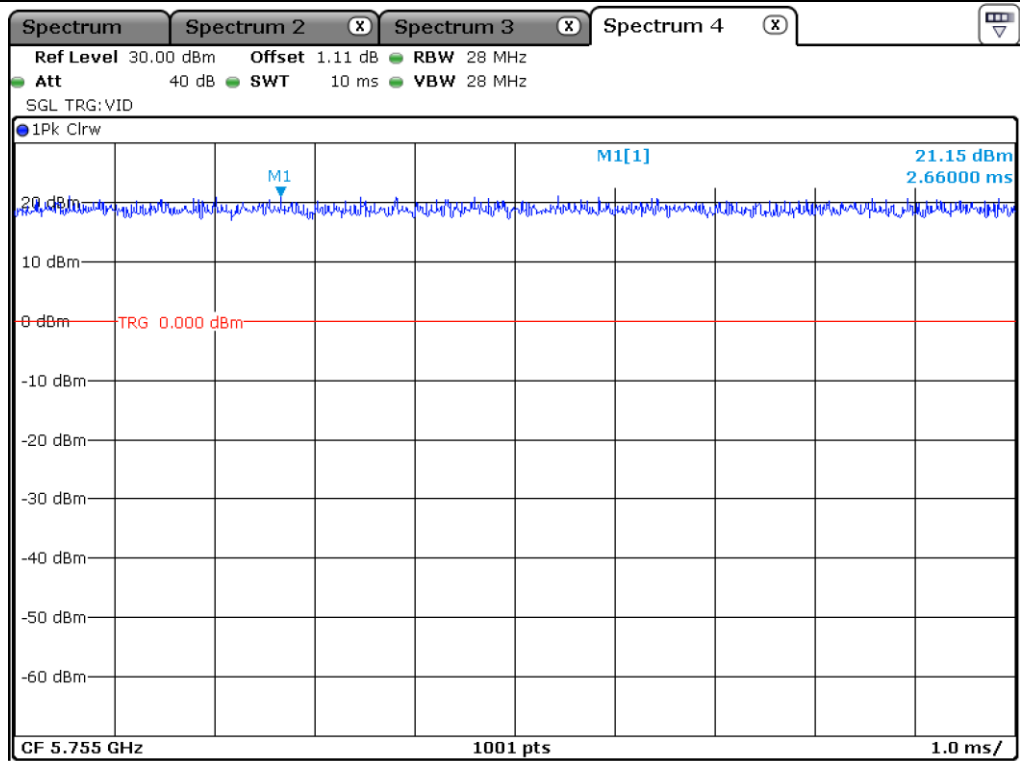

UNII 3_802.11 HT40_Antenna 1

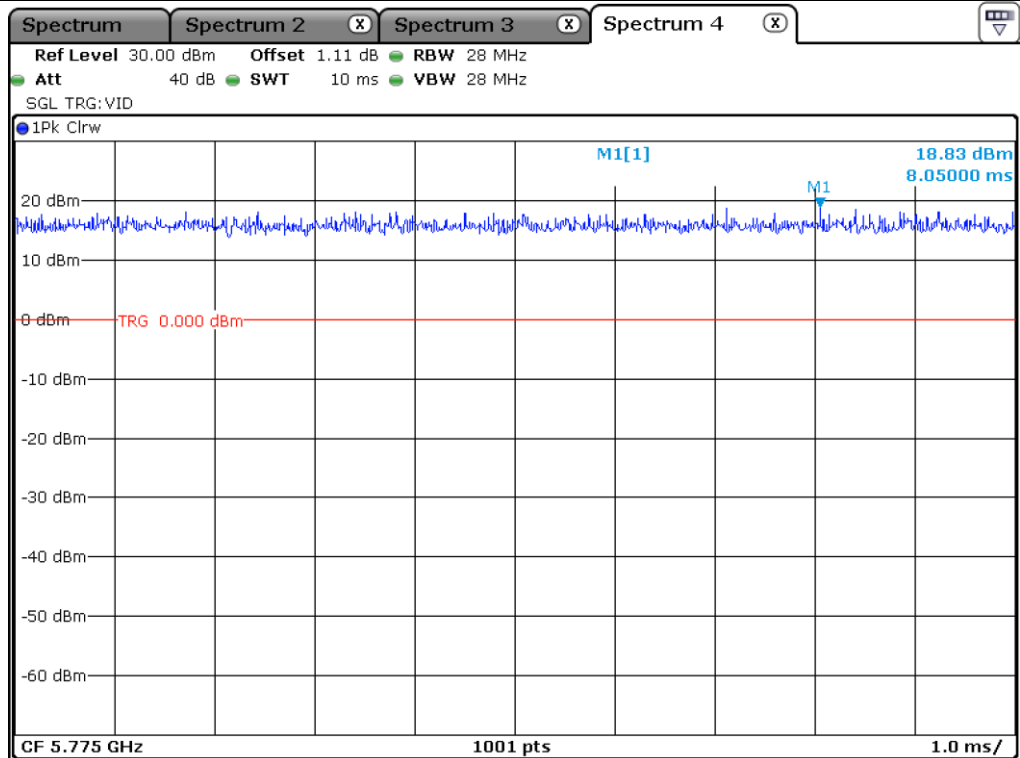


UNII 3_802.11 VHT 80_Antenna 1

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

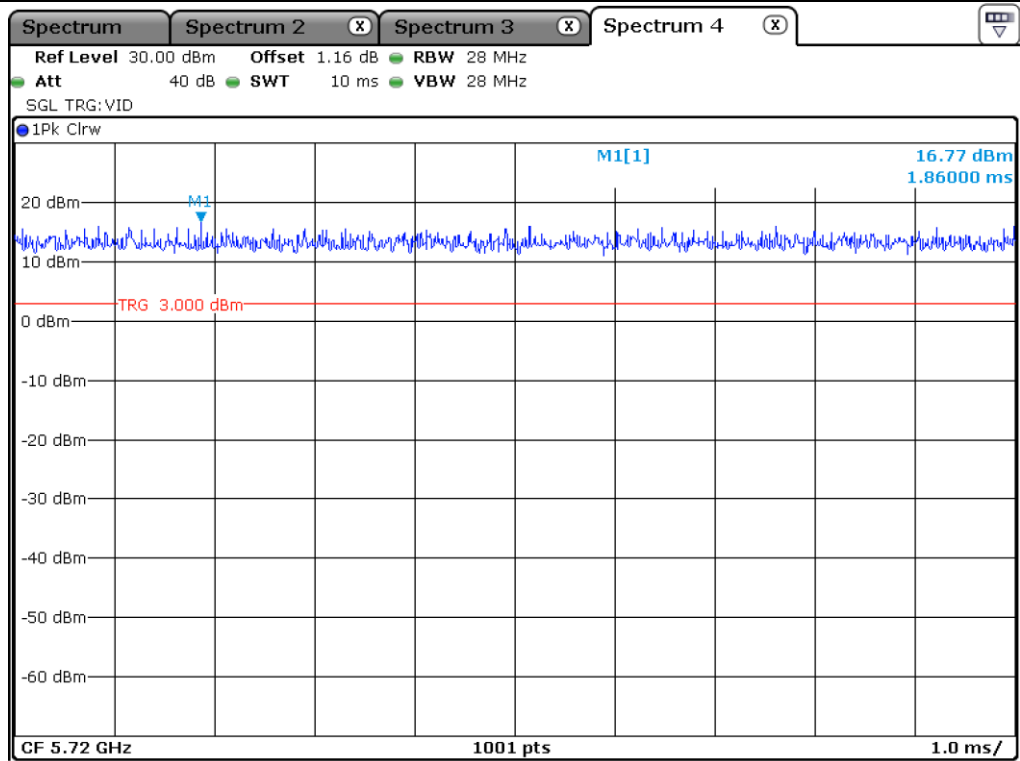


Staddle_802.11 a_Antenna 0

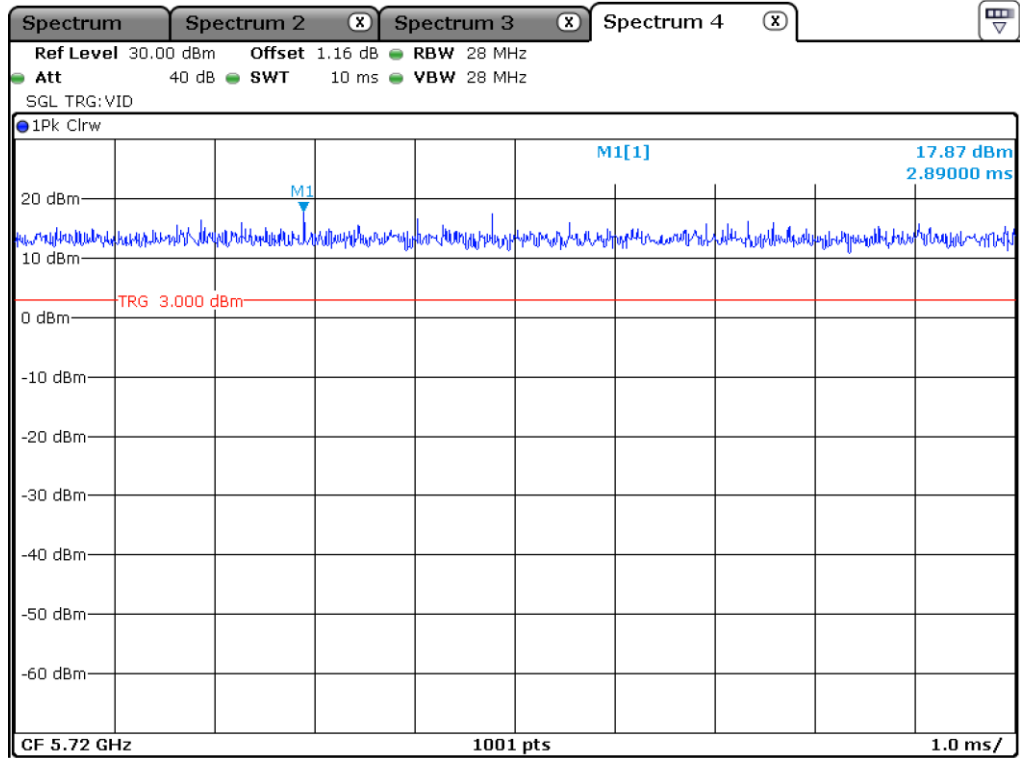


Staddle_802.11 HT 20_Antenna 0

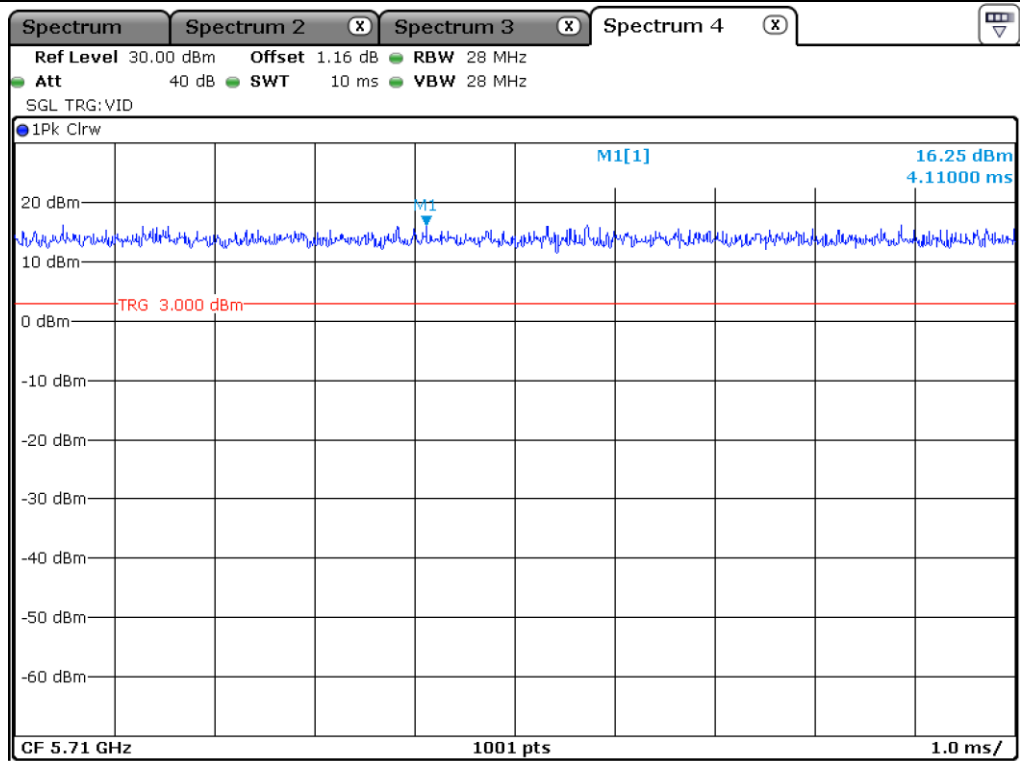


Staddle_802.11 HT40_Antenna 0

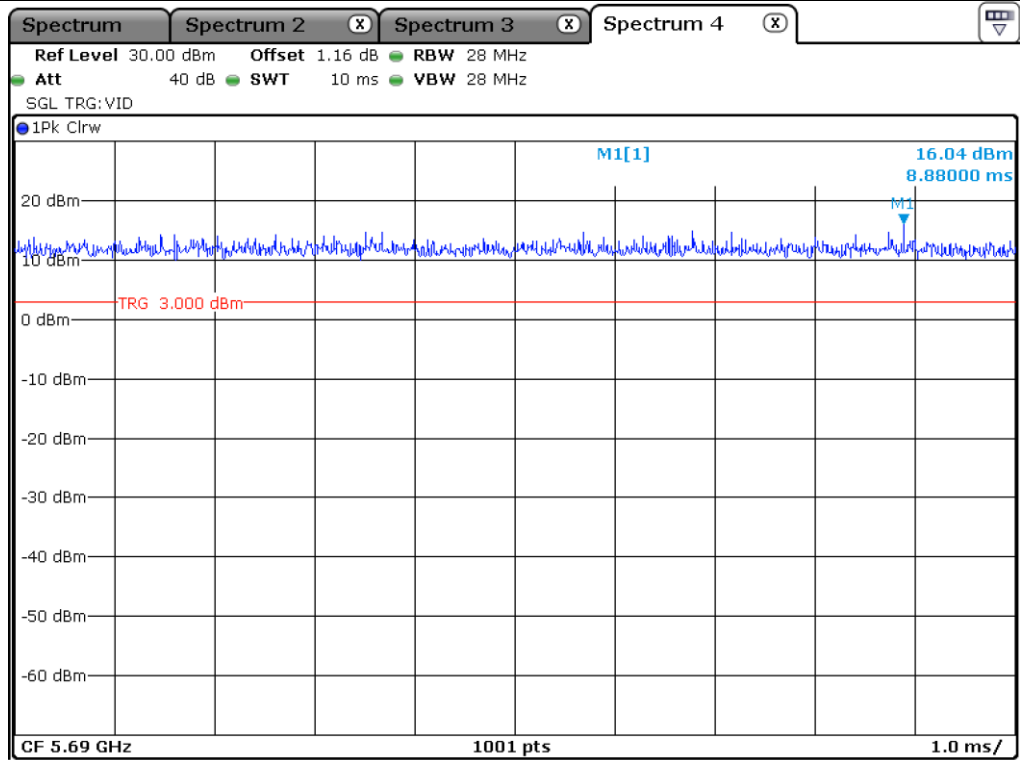

Staddle_802.11 VHT 80_Antenna 0

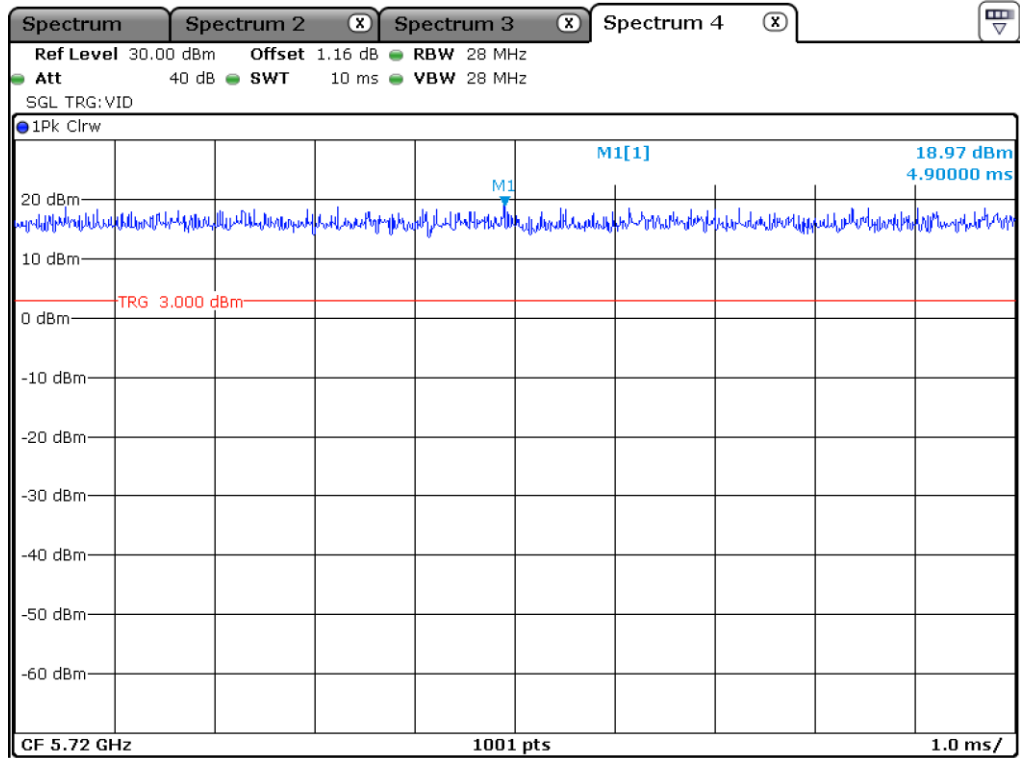

Staddle_802.11 a_Antenna 1

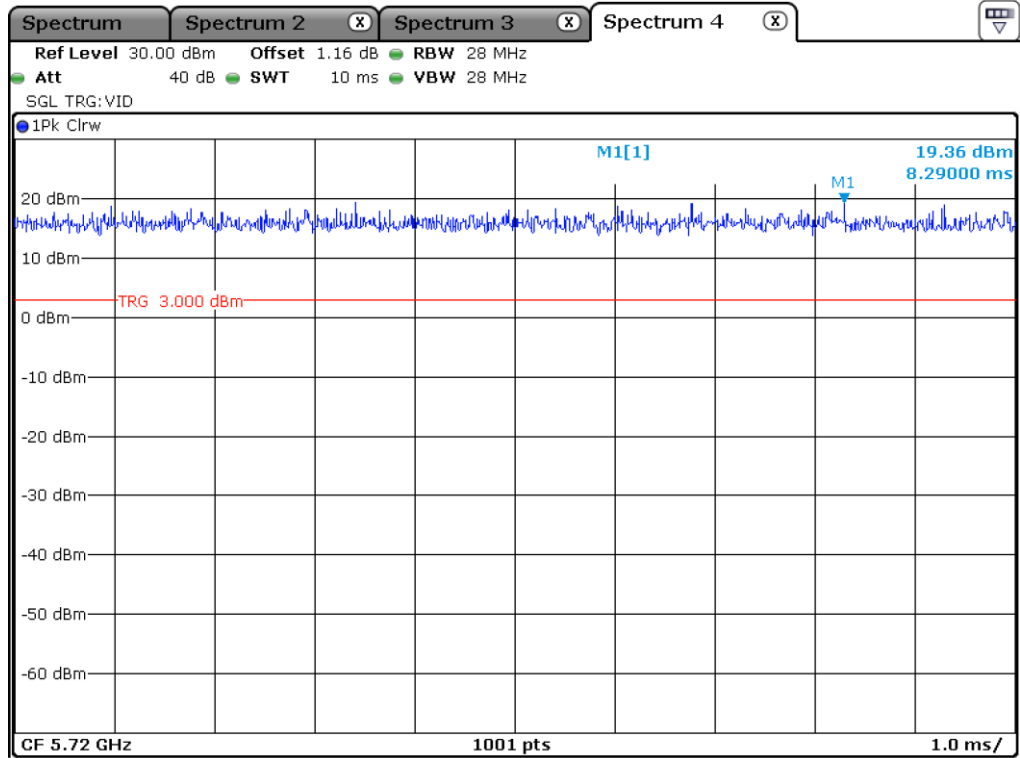


Staddle_802.11 HT 20_Antenna 1

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

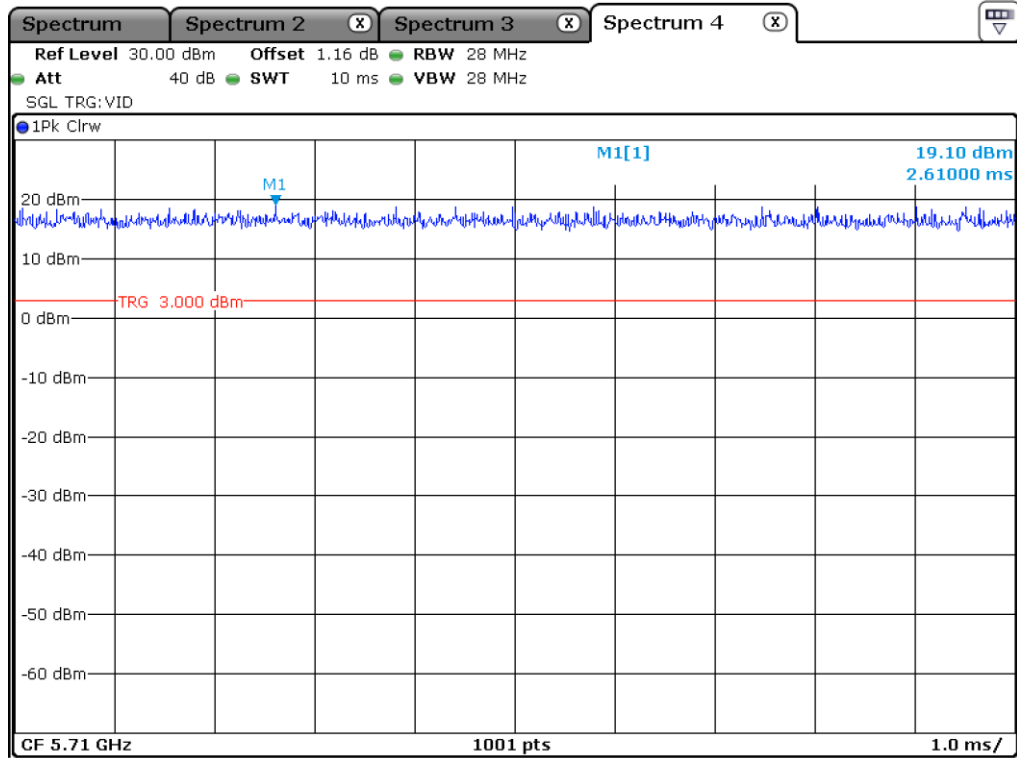

Staddle_802.11 HT40_Antenna 1

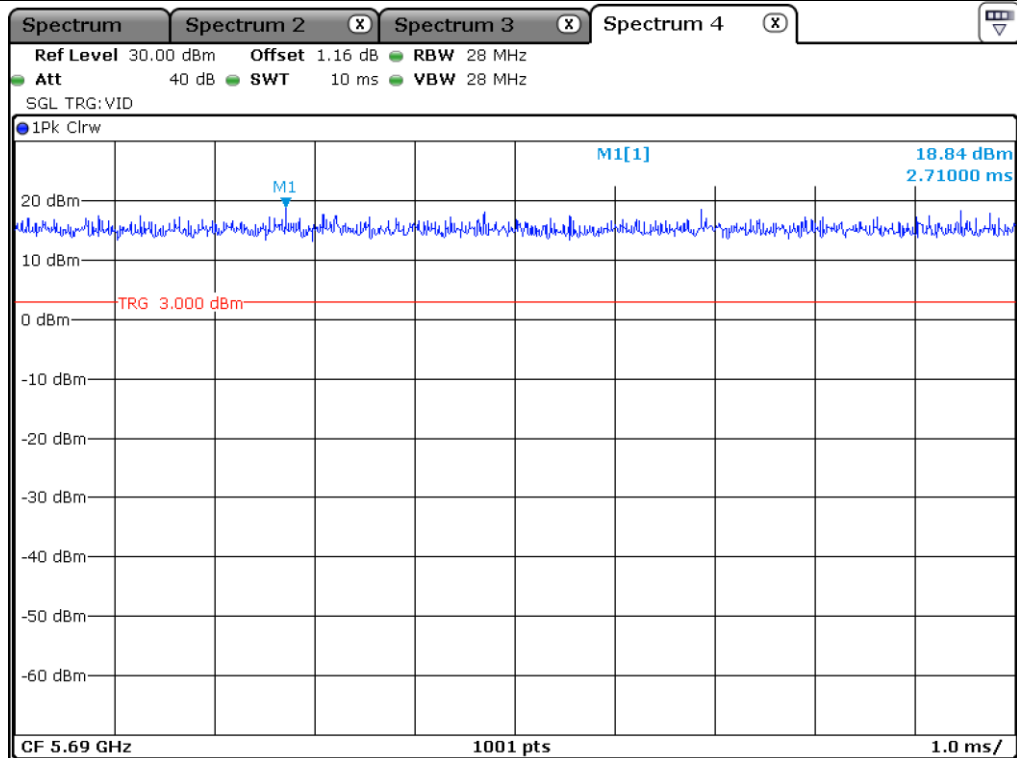

Staddle_802.11 VHT 80_Antenna 1

5.4 Configuration of Test System

Line Conducted Test: The EUT was connected to USB and the power of USB was connected to Notebook PC. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2020 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2020 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a Chip Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MINIMUM 26 dB BANDWIDTH

7.1 Operating environment

Temperature : 23 °C
Relative humidity : 44 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 26 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 26 dB.



7.3 Test Date

October 07, 2021 ~ October 20, 2021


7.4 Test data for 802.11a RLAN Mode

7.4.1 Test data for Antenna 0


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	19.68
	Middle	5 220.00	19.88
	High	5 240.00	19.68
5 250 ~ 5 350	Low	5 260.00	19.68
	Middle	5 300.00	19.93
	High	5 320.00	19.73
5 470 ~ 5 725	Low	5 500.00	19.58
	Middle	5 580.00	19.98
	High	5 700.00	19.88
5 725 ~ 5 850	Low	5 745.00	19.78
	Middle	5 785.00	19.78
	High	5 825.00	19.83

Remark: See next page for measurement data.

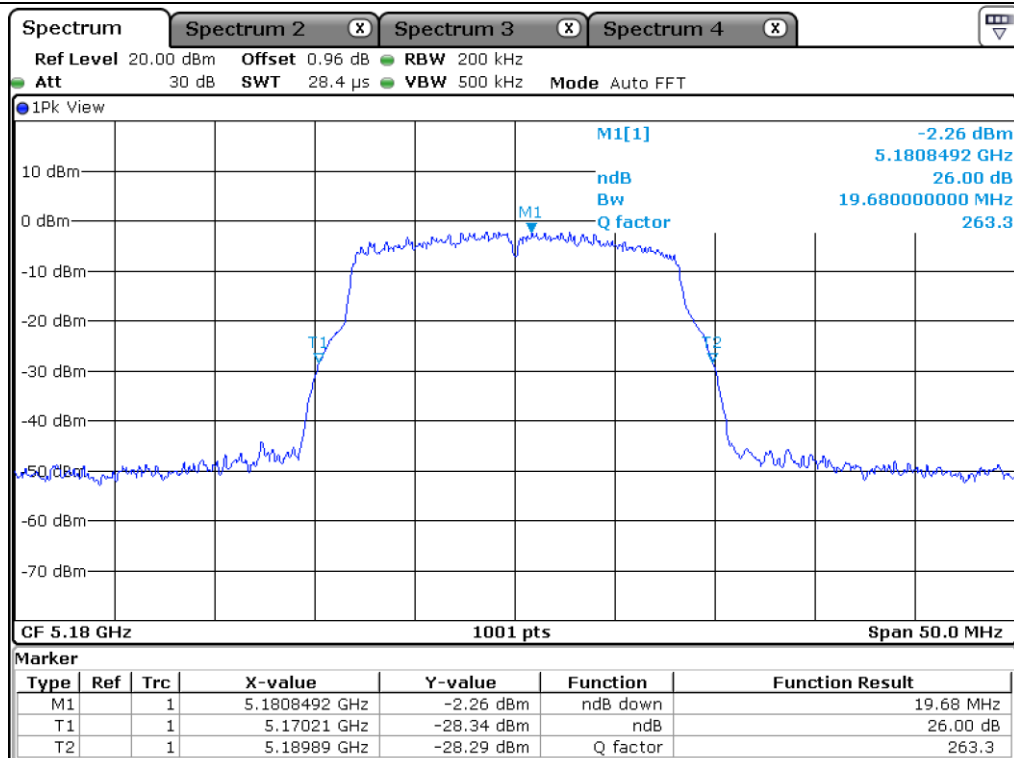

Low Channel (5 180 MHz)

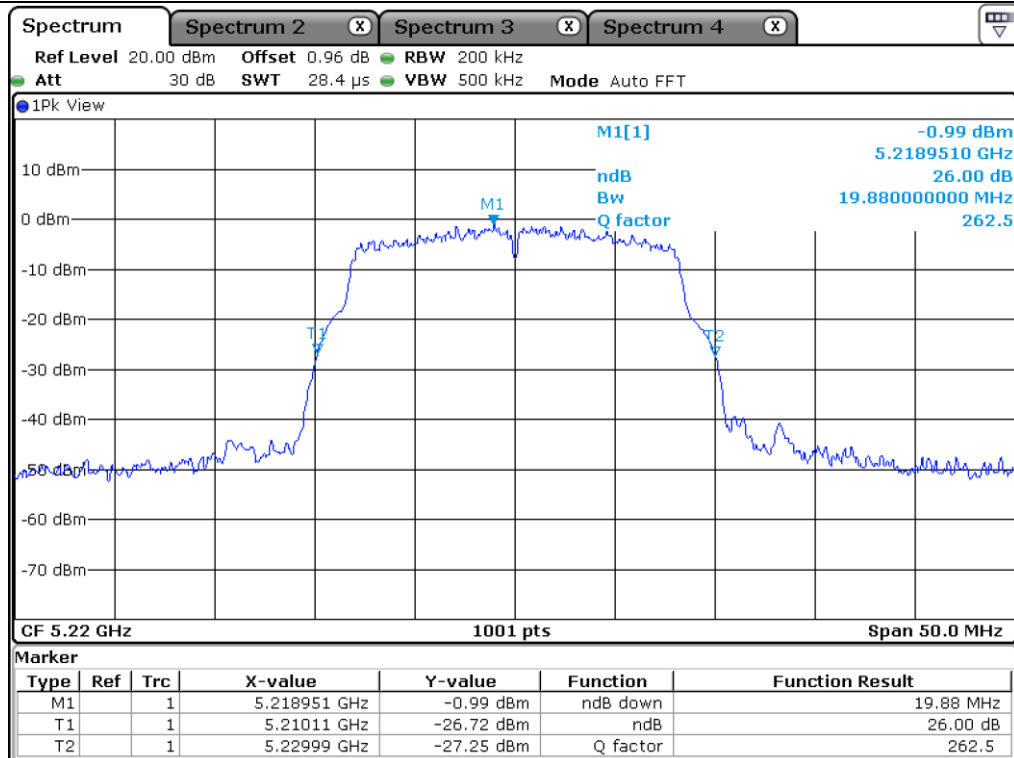


Middle Channel (5 220 MHz)


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.


OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

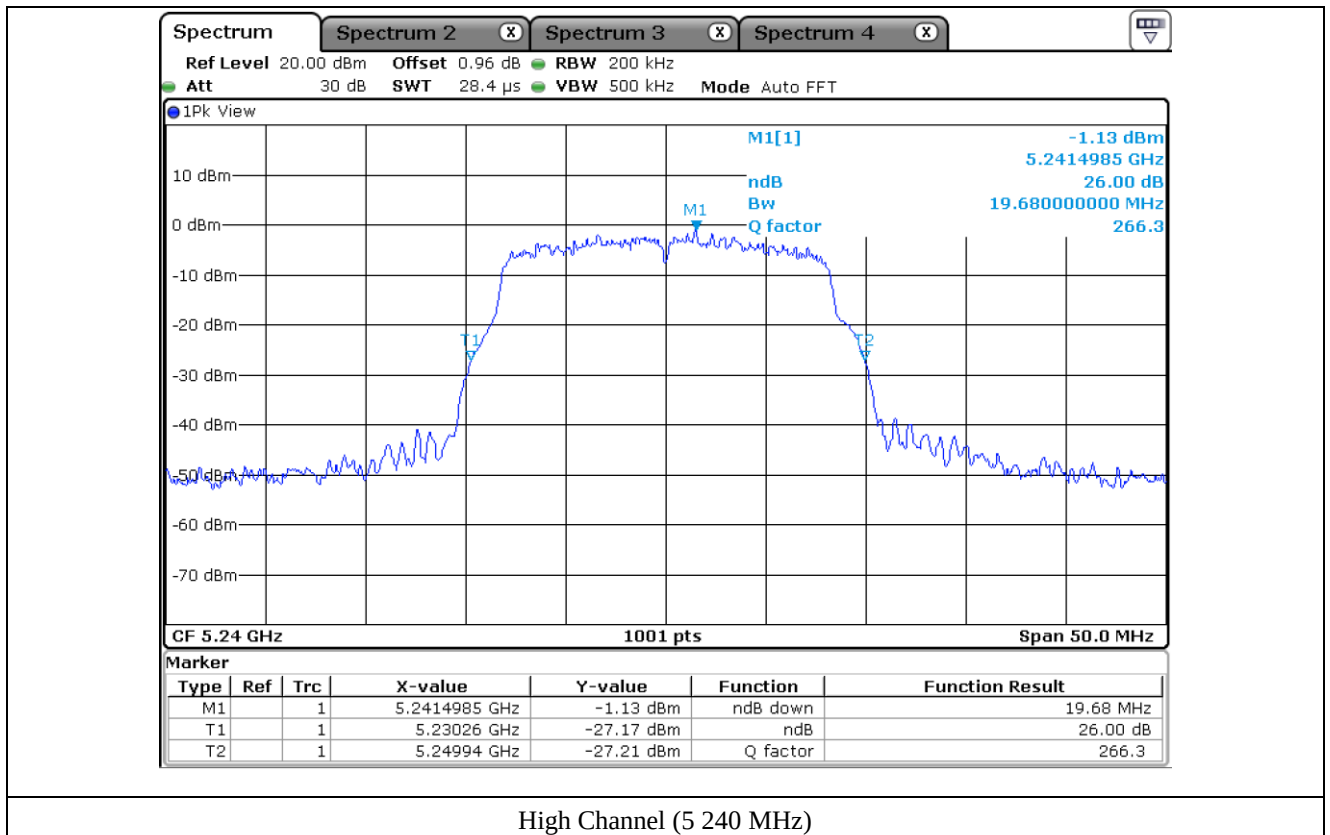

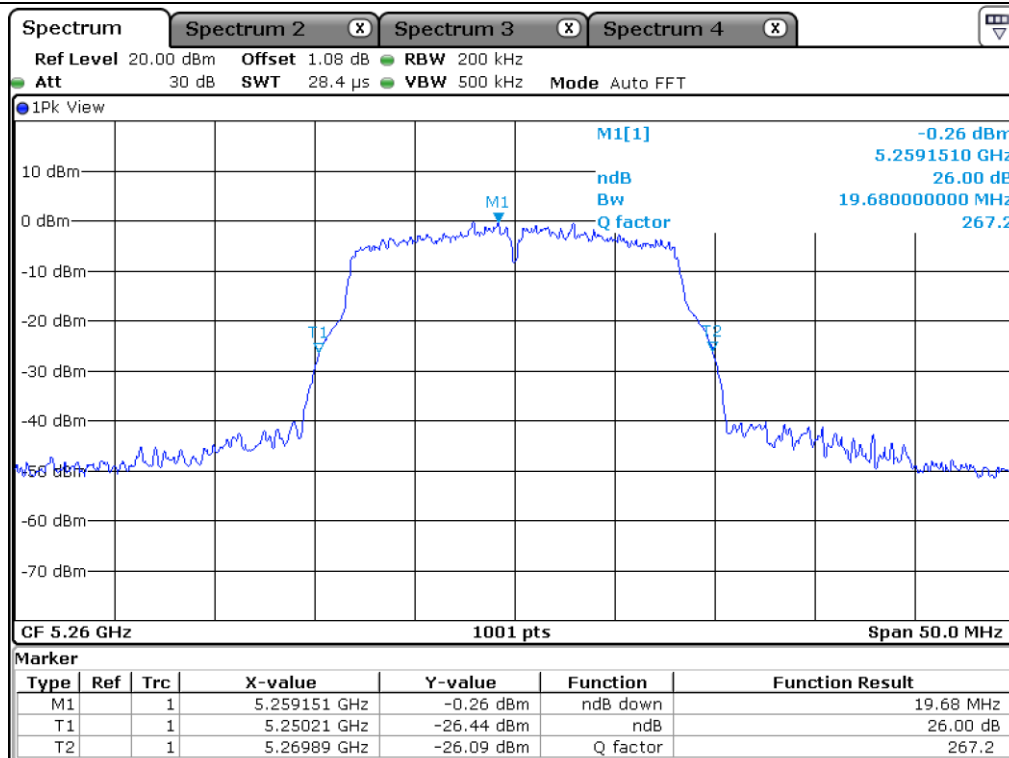

Low Channel (5 260 MHz)

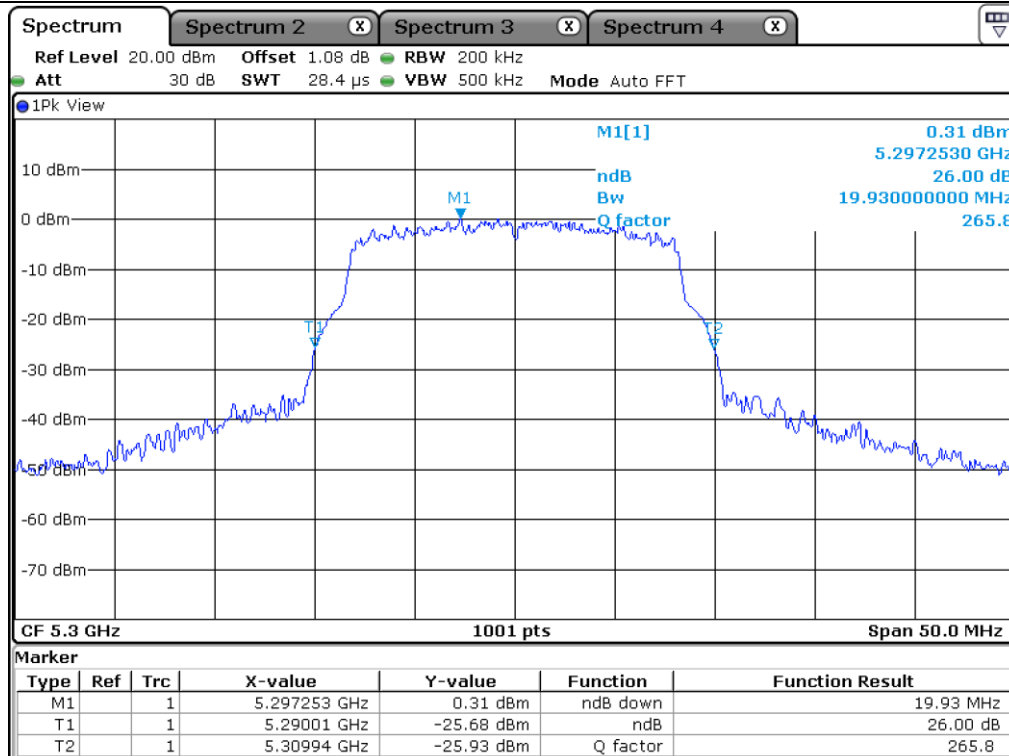


Middle Channel (5 300 MHz)


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.


OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

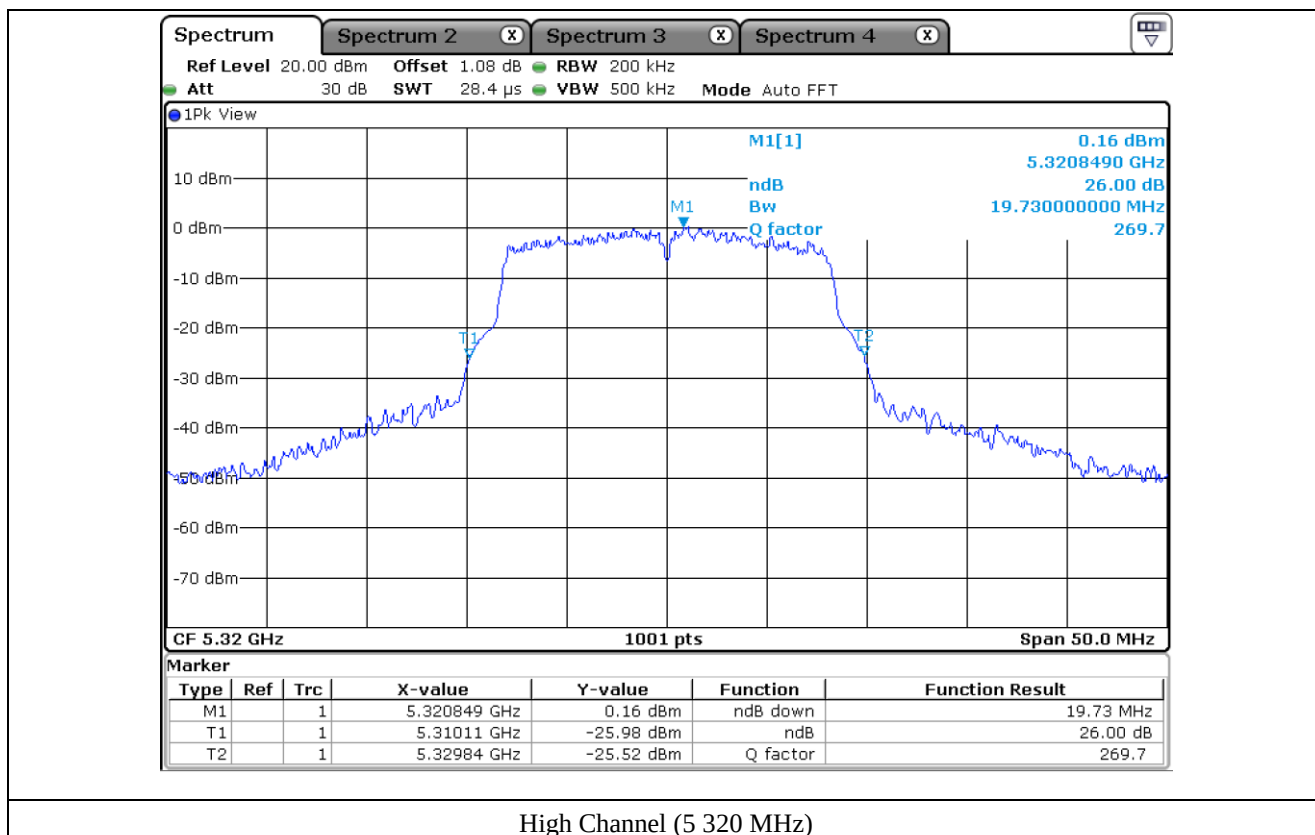

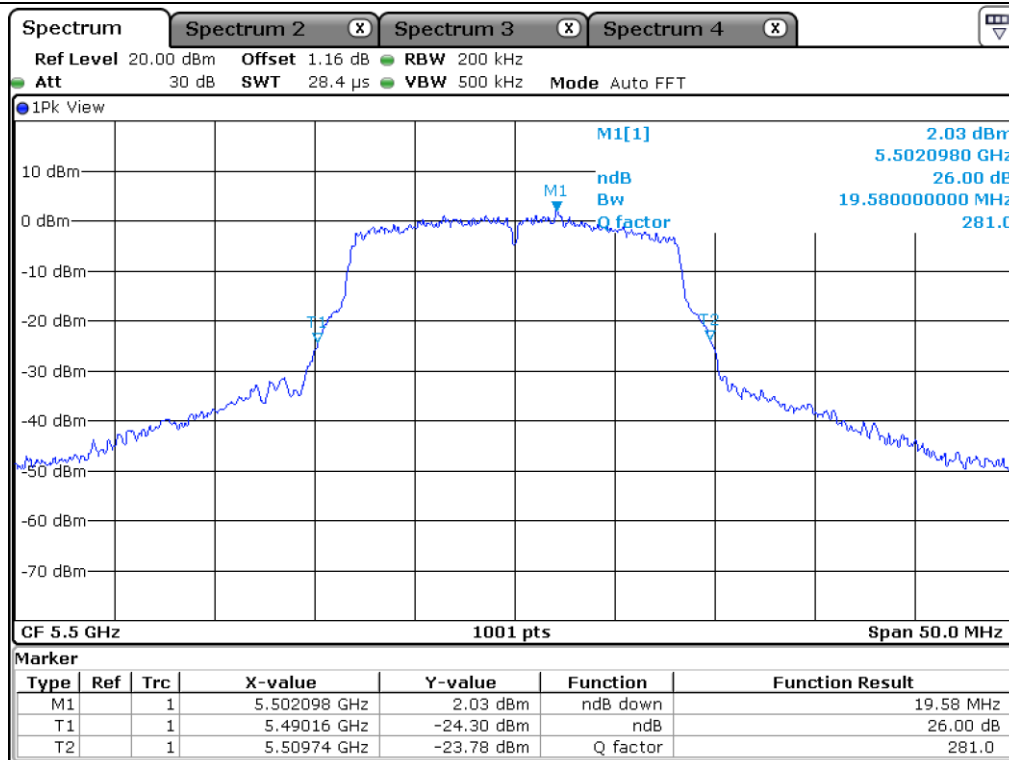

Low Channel (5 500 MHz)

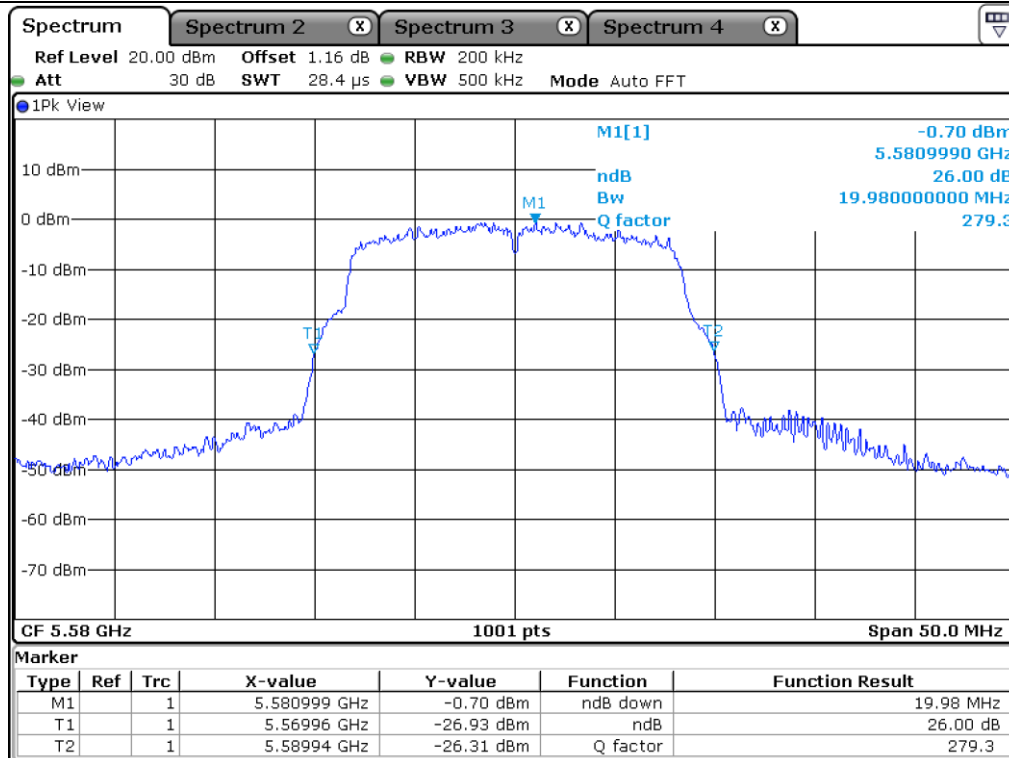


Middle Channel (5 580 MHz)


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.


OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

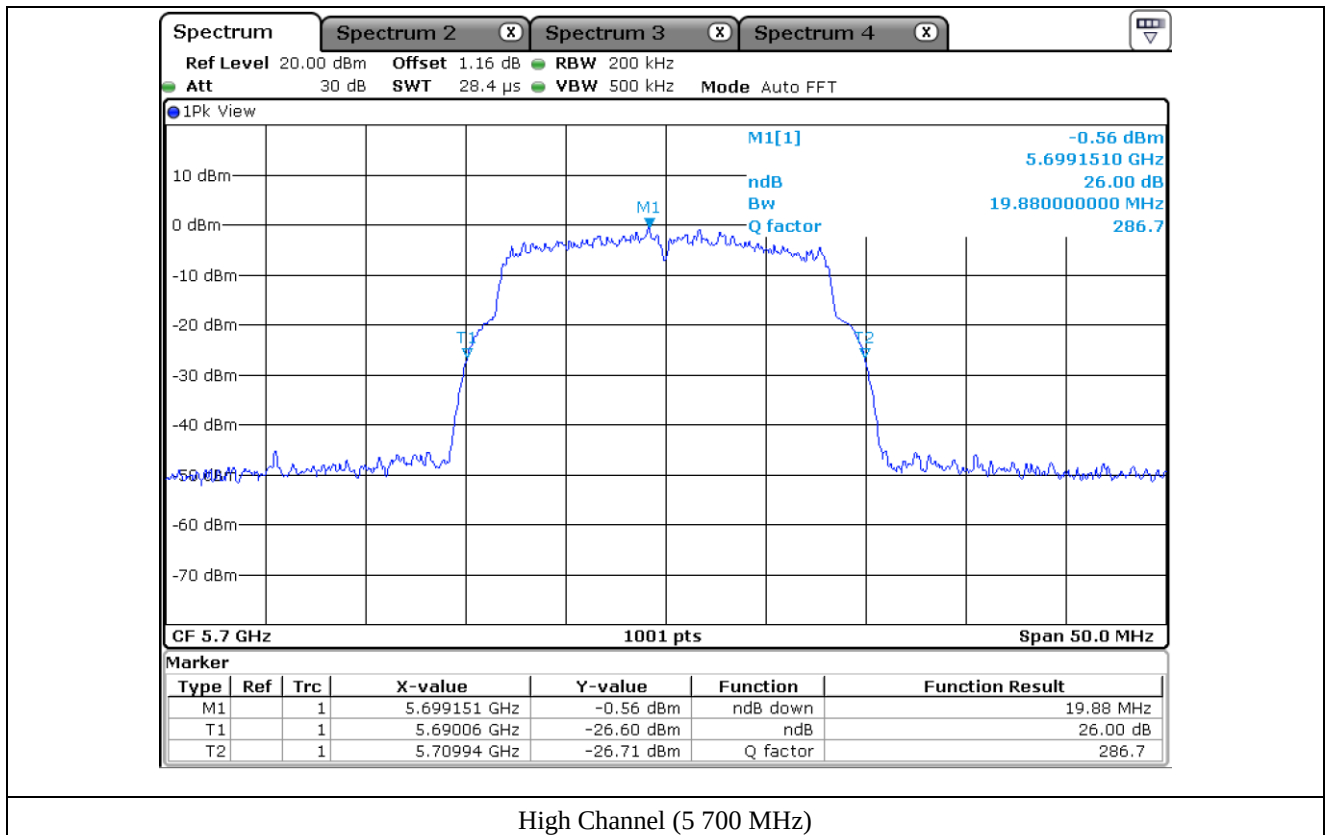

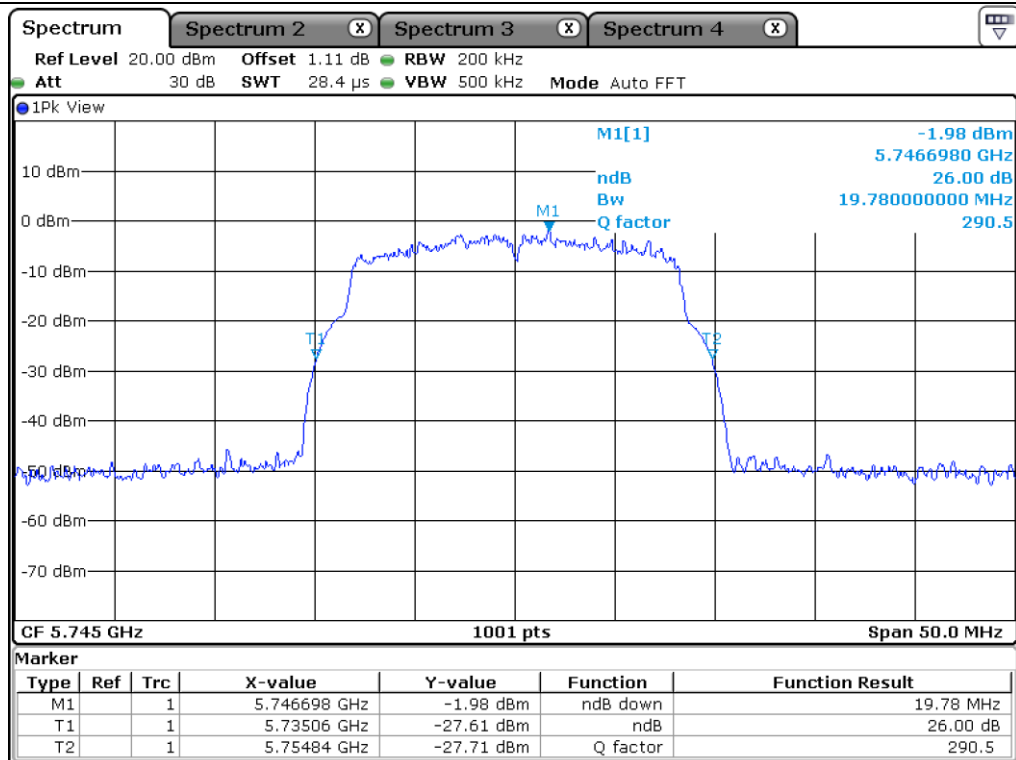

Low Channel (5 745 MHz)

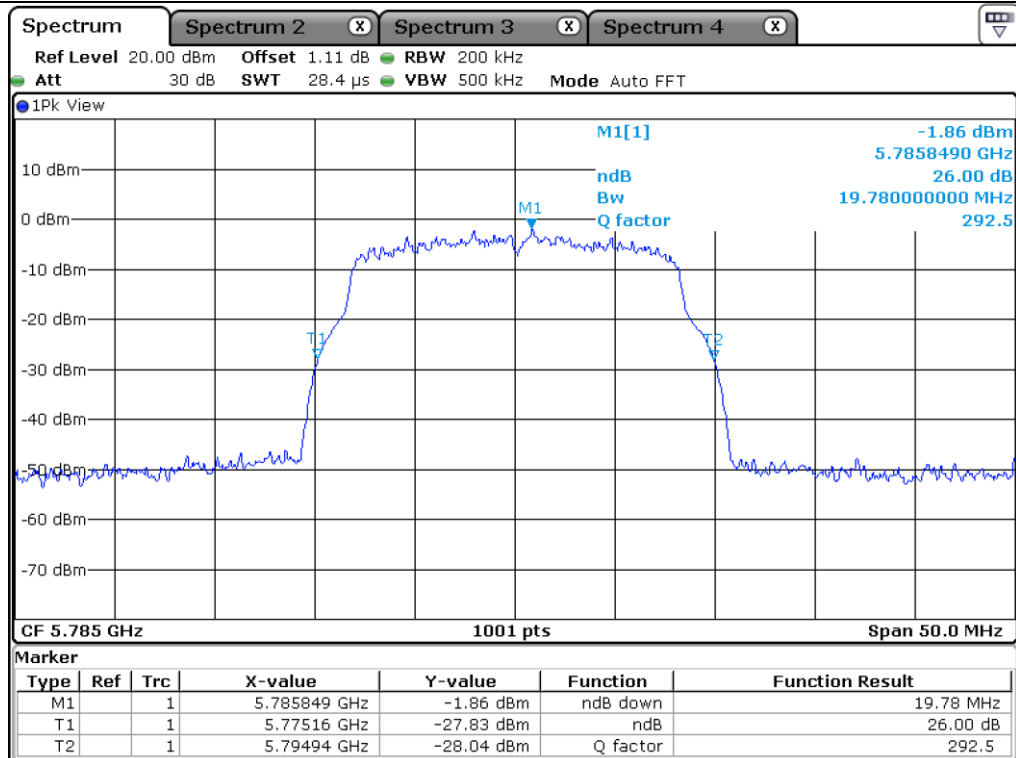


Middle Channel (5 785 MHz)

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

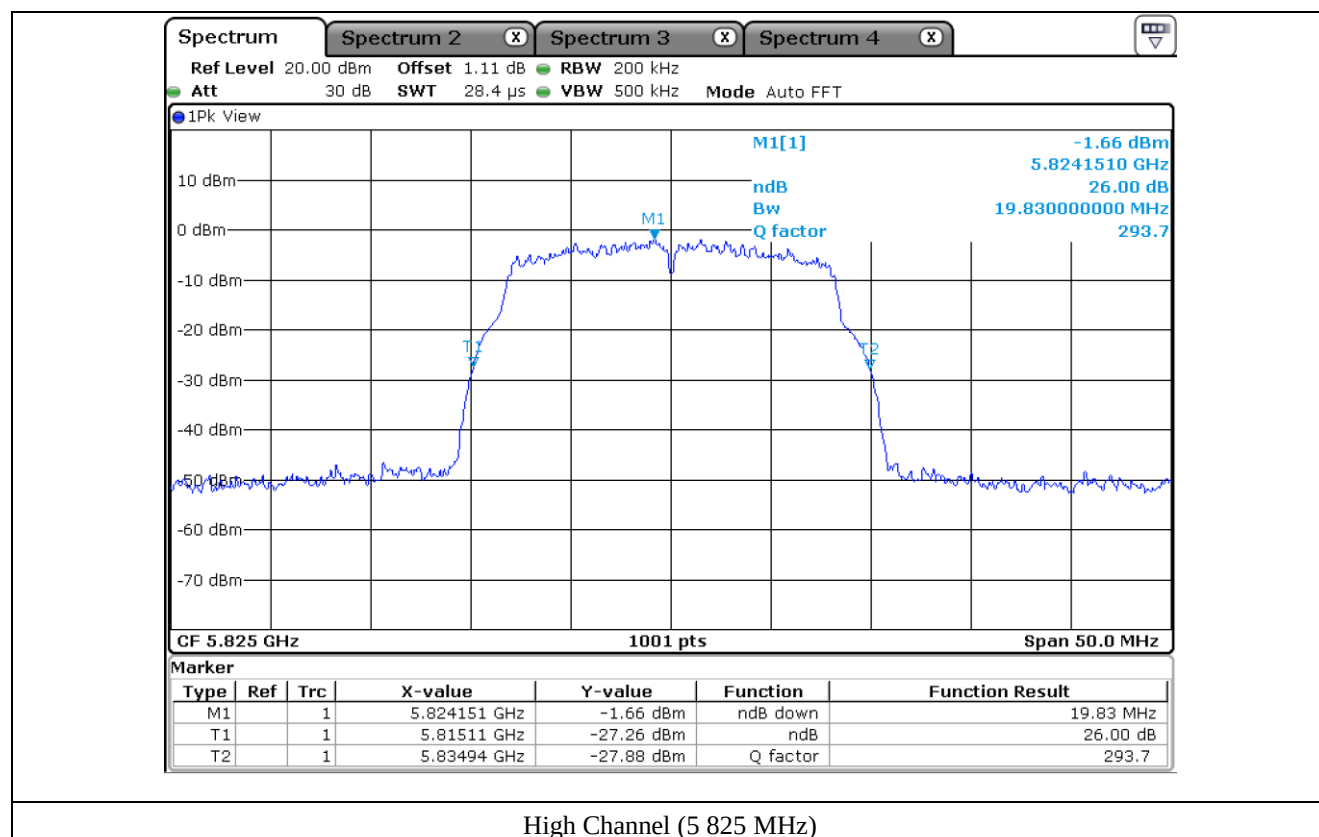


7.4.2 Test data for Antenna 1


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	19.63
	Middle	5 220.00	19.63
	High	5 240.00	19.73
5 250 ~ 5 350	Low	5 260.00	19.78
	Middle	5 300.00	19.78
	High	5 320.00	19.93
5 470 ~ 5 725	Low	5 500.00	19.73
	Middle	5 580.00	19.98
	High	5 700.00	19.73
5 725 ~ 5 850	Low	5 745.00	19.88
	Middle	5 785.00	19.68
	High	5 825.00	19.73

Remark: See next page for measurement data.

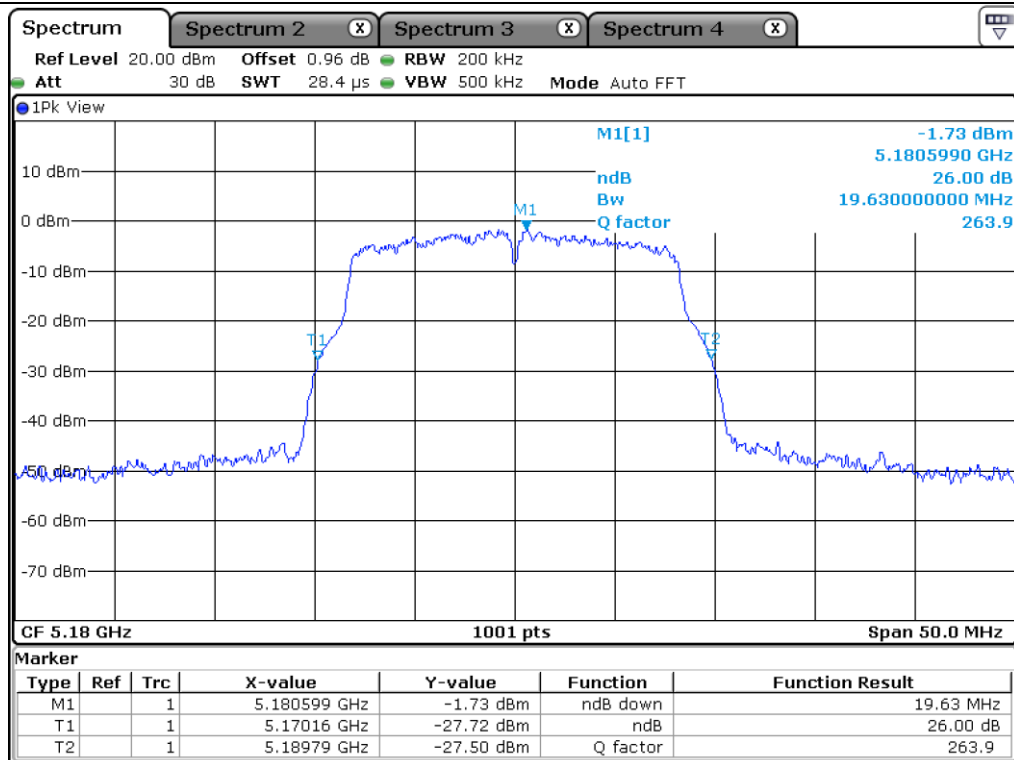

Low Channel (5 180 MHz)

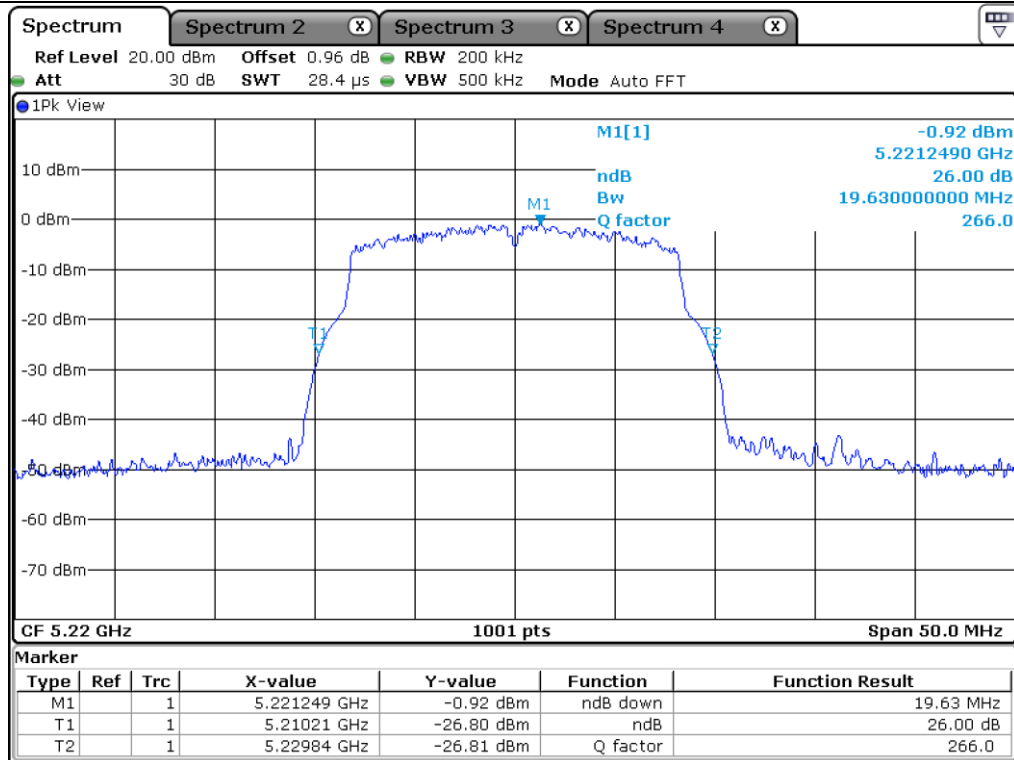


Middle Channel (5 220 MHz)


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.


OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

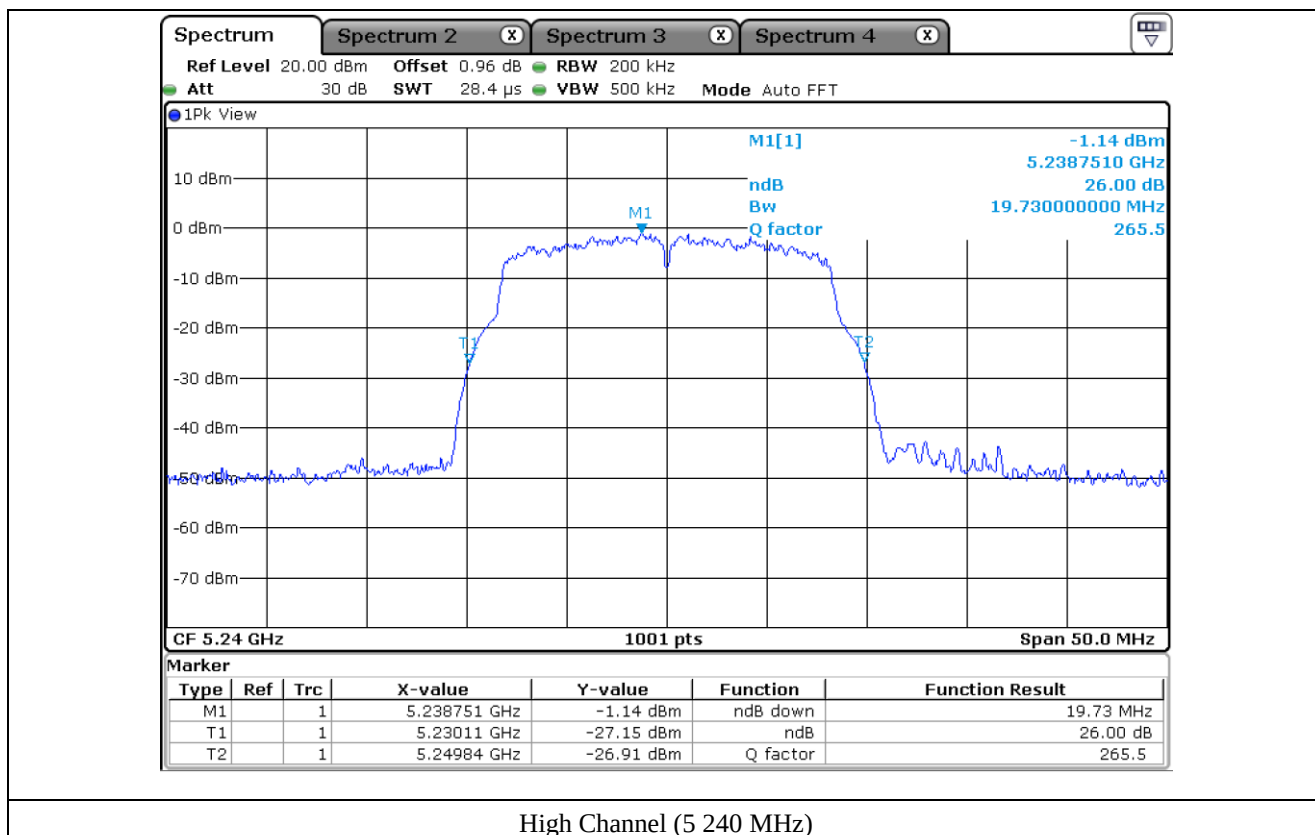

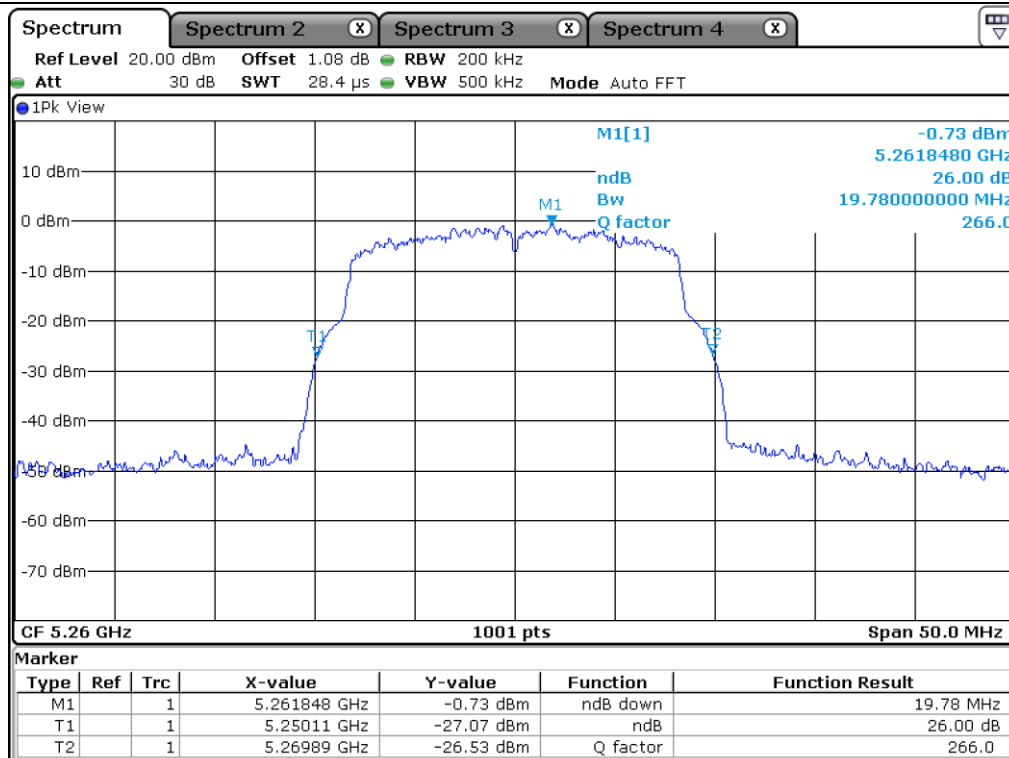

Low Channel (5 260 MHz)

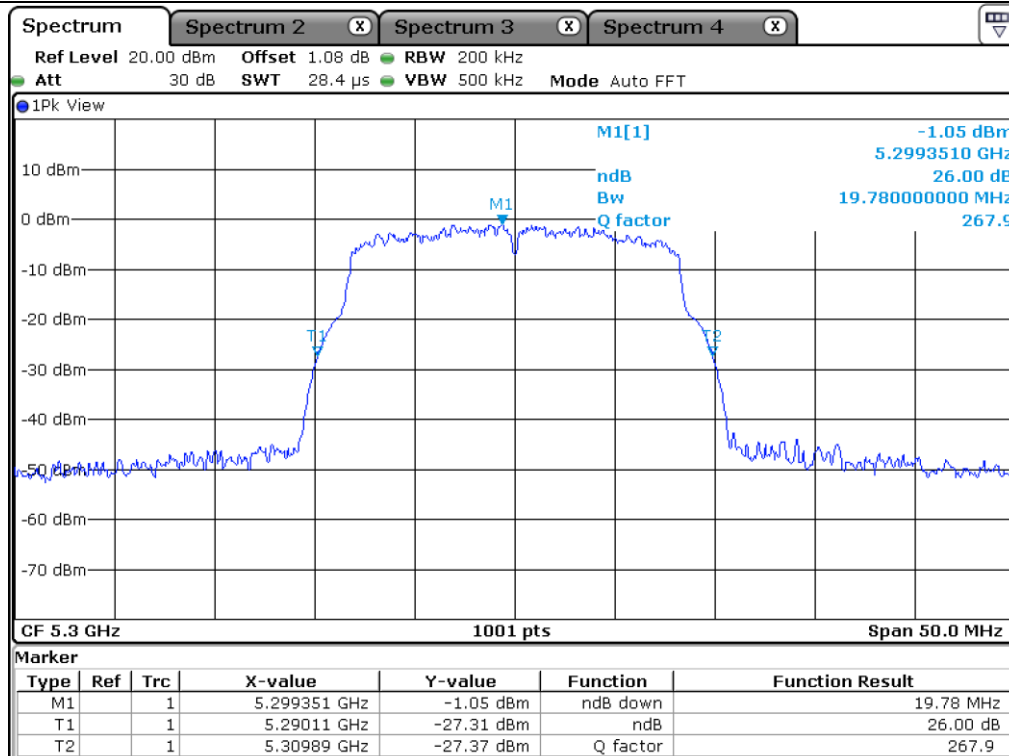


Middle Channel (5 300 MHz)


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.


OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

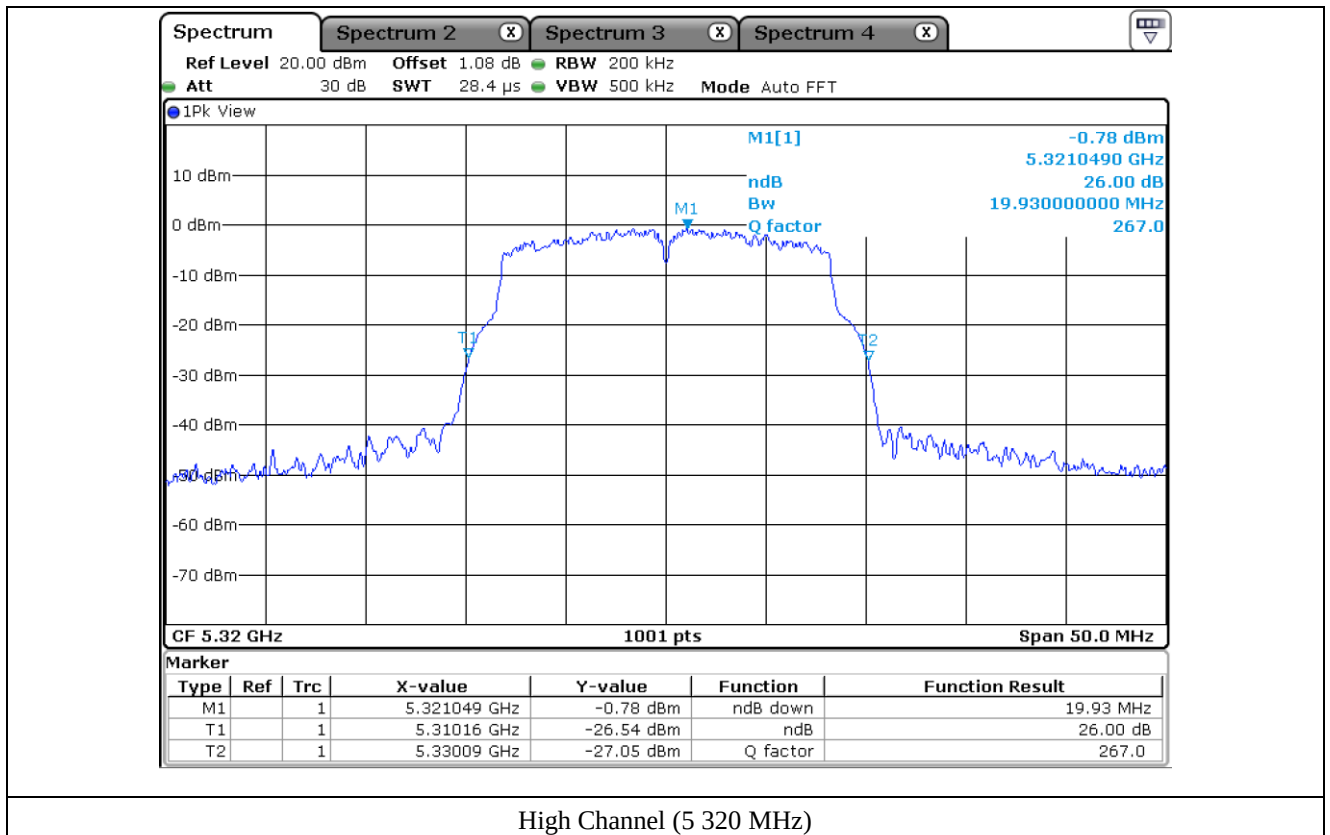


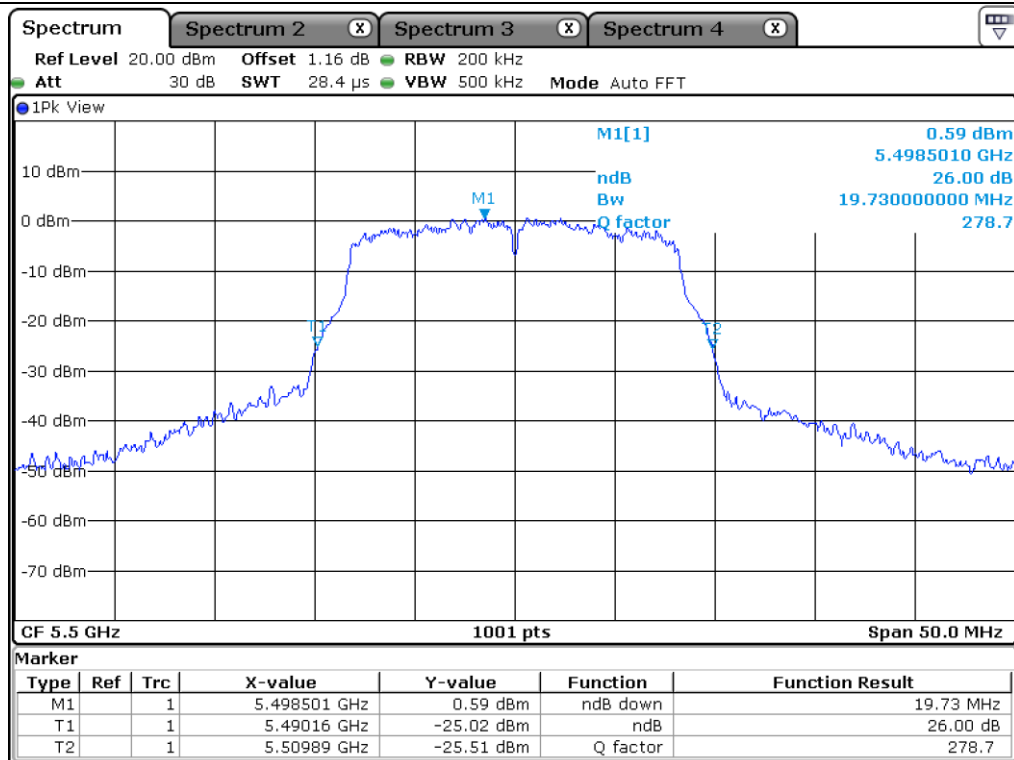


Low Channel (5 500 MHz)

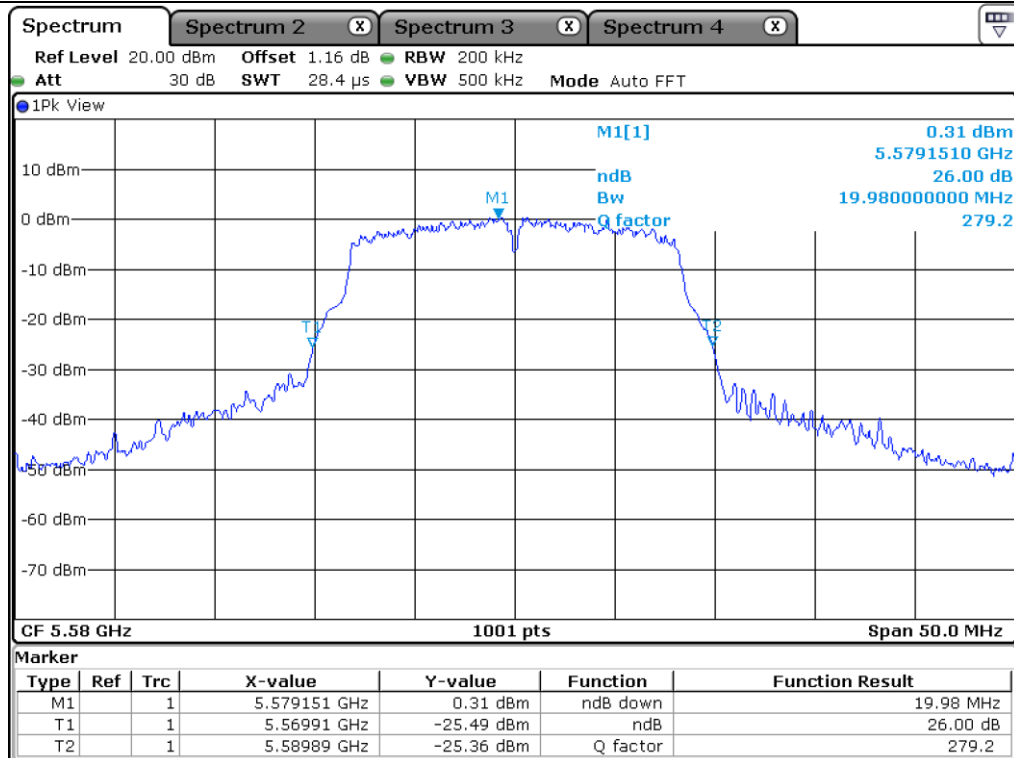


Middle Channel (5 580 MHz)

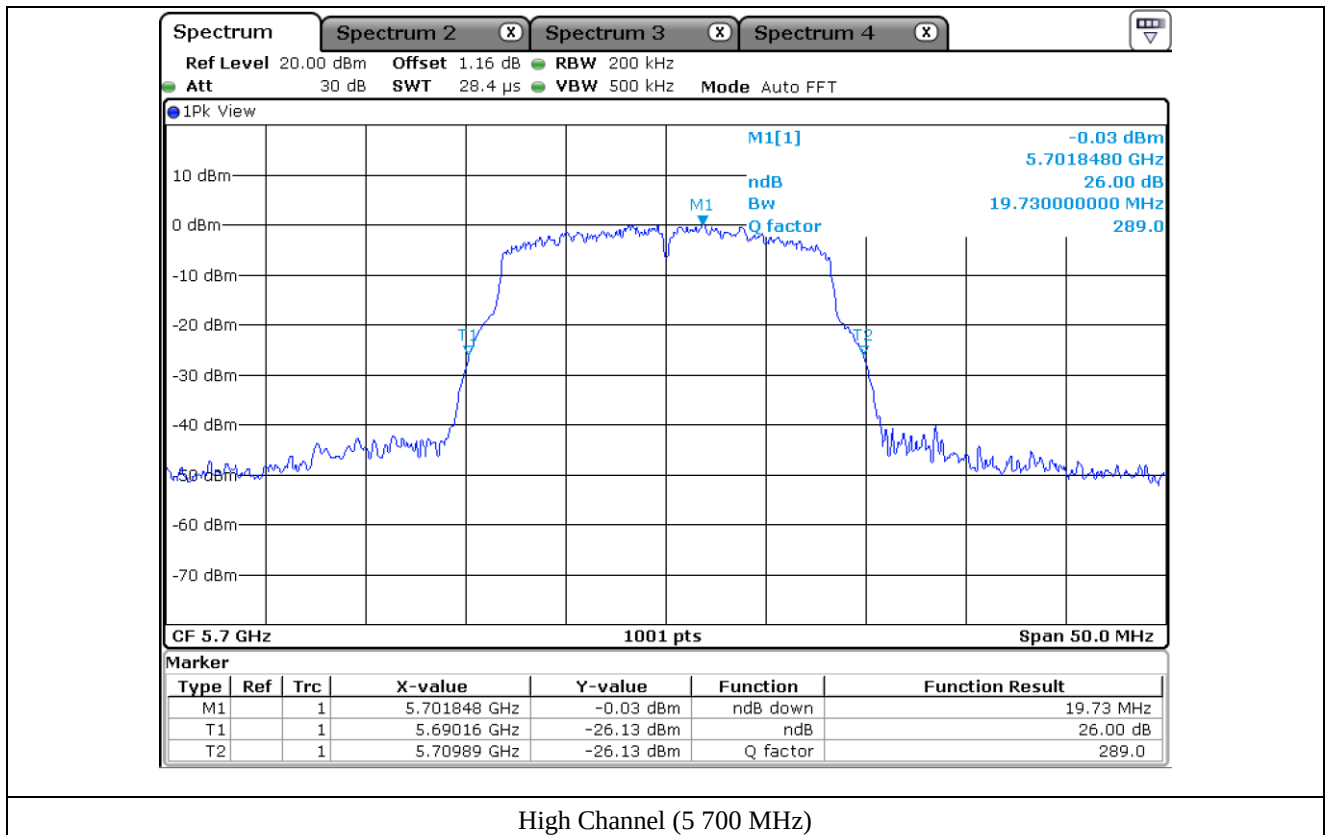

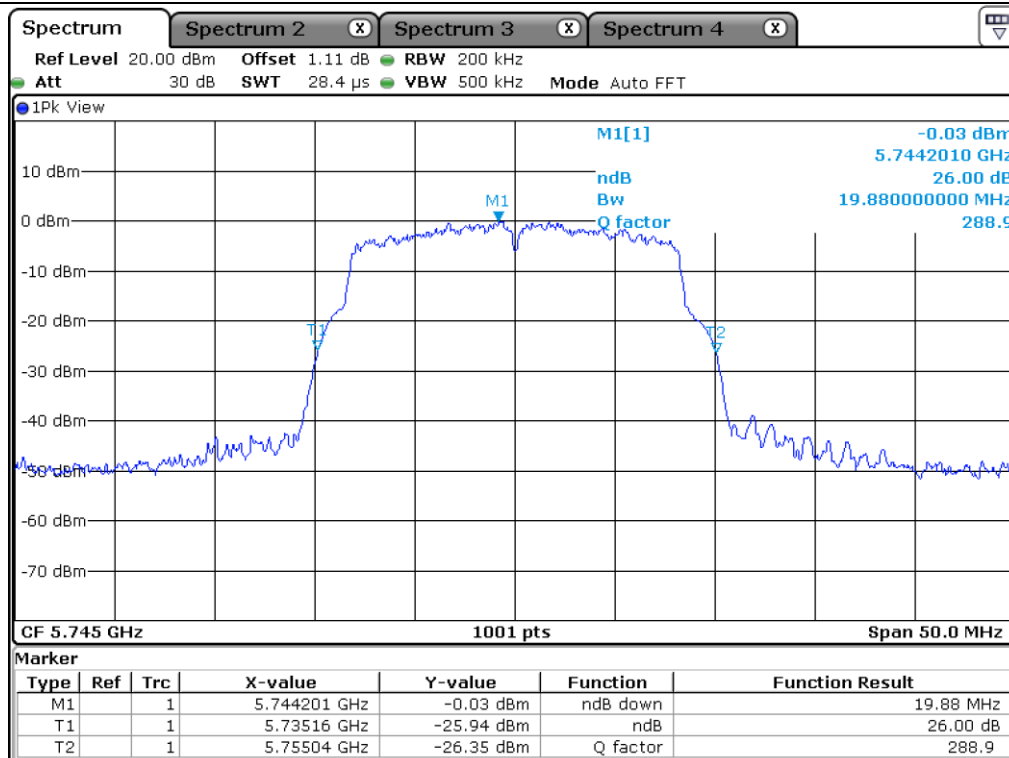

Low Channel (5 745 MHz)

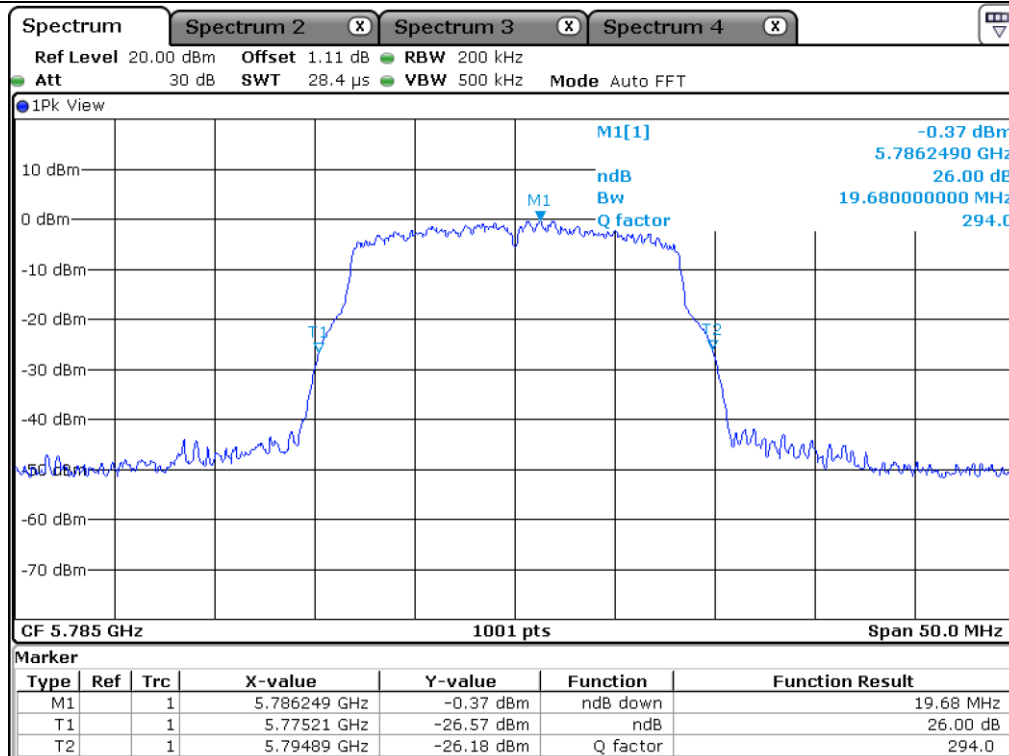


Middle Channel (5 785 MHz)

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

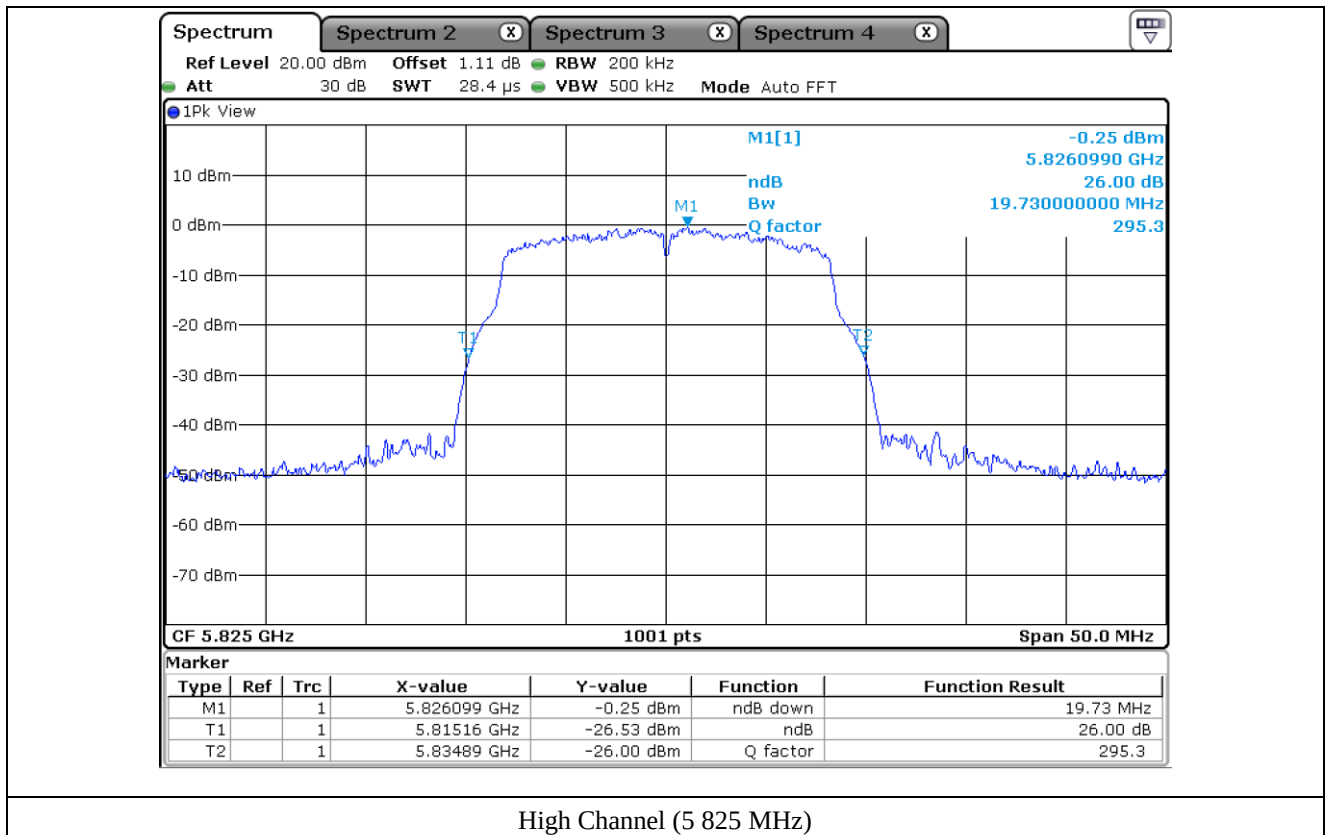

7.4.3 Test data for Staddle Channel_Antenna 0

-. Test Result : Pass


FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 720.00	14.84
5 725 ~ 5 850	5 720.00	4.99

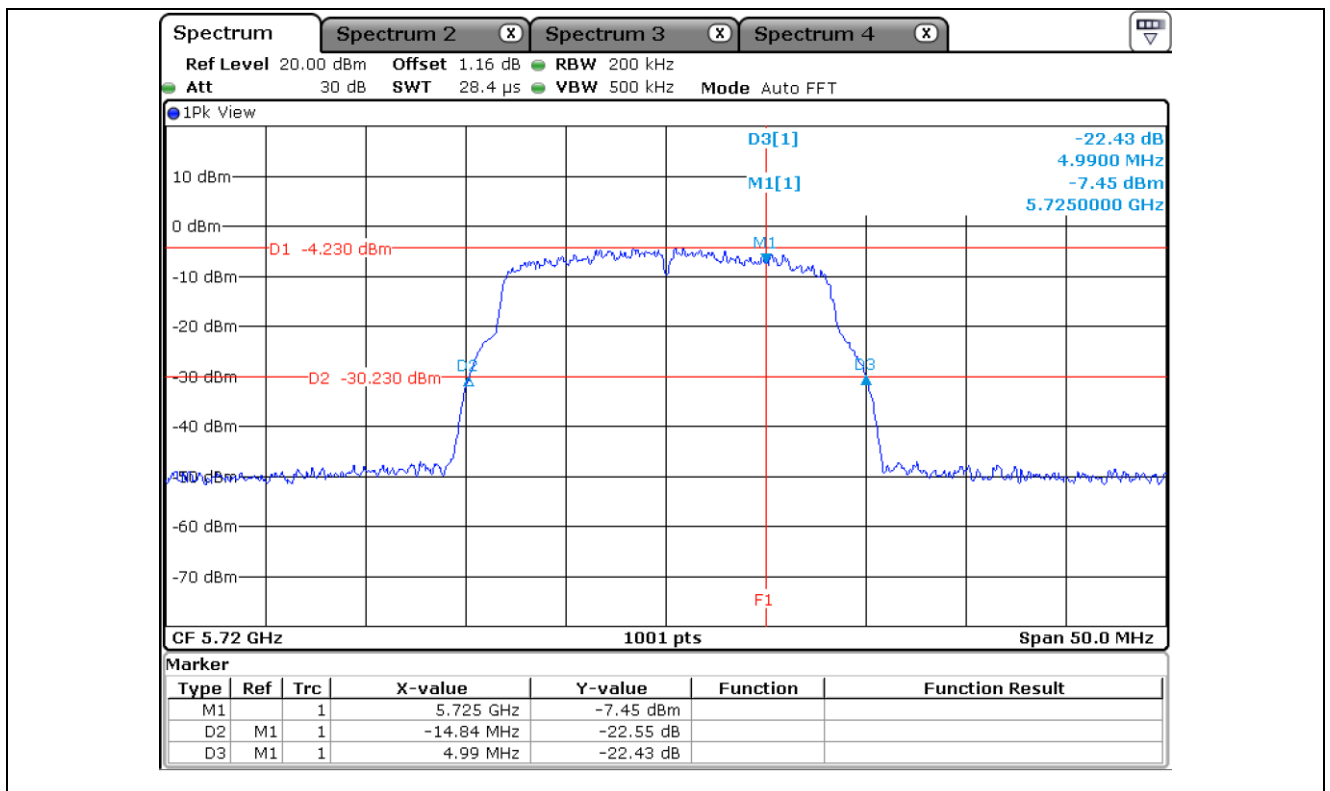

7.4.4 Test data for Staddle Channel_Antenna 1

-. Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 720.00	14.84
5 725 ~ 5 850	5 720.00	4.84

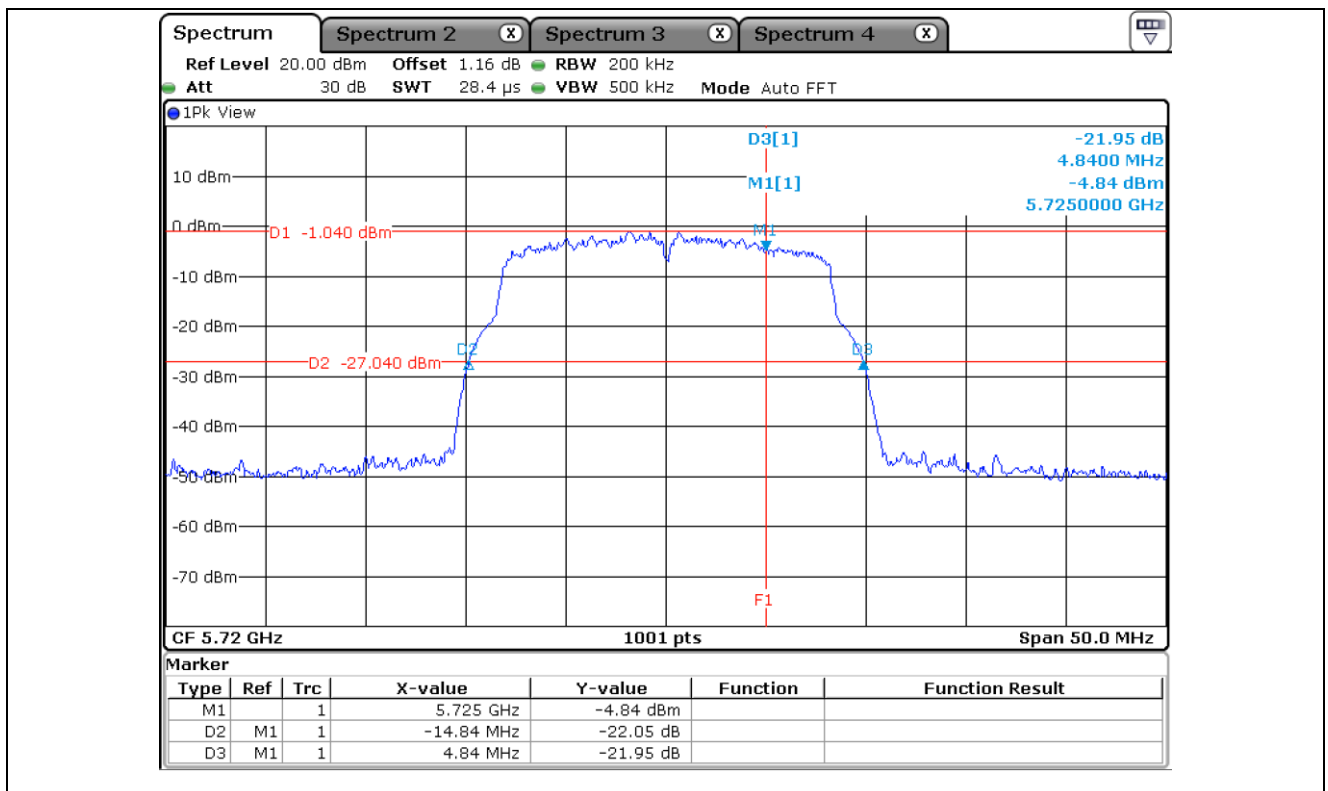


7.5 Test data for 802.11n_HT20 RLAN Mode

7.5.1 Test data for Antenna 0


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	20.23
	Middle	5 220.00	20.23
	High	5 240.00	20.28
5 250 ~ 5 350	Low	5 260.00	20.18
	Middle	5 300.00	20.28
	High	5 320.00	19.98
5 470 ~ 5 725	Low	5 500.00	20.18
	Middle	5 580.00	20.08
	High	5 700.00	19.93
5 725 ~ 5 850	Low	5 745.00	20.38
	Middle	5 785.00	20.13
	High	5 825.00	20.03

Remark: See next page for measurement data.

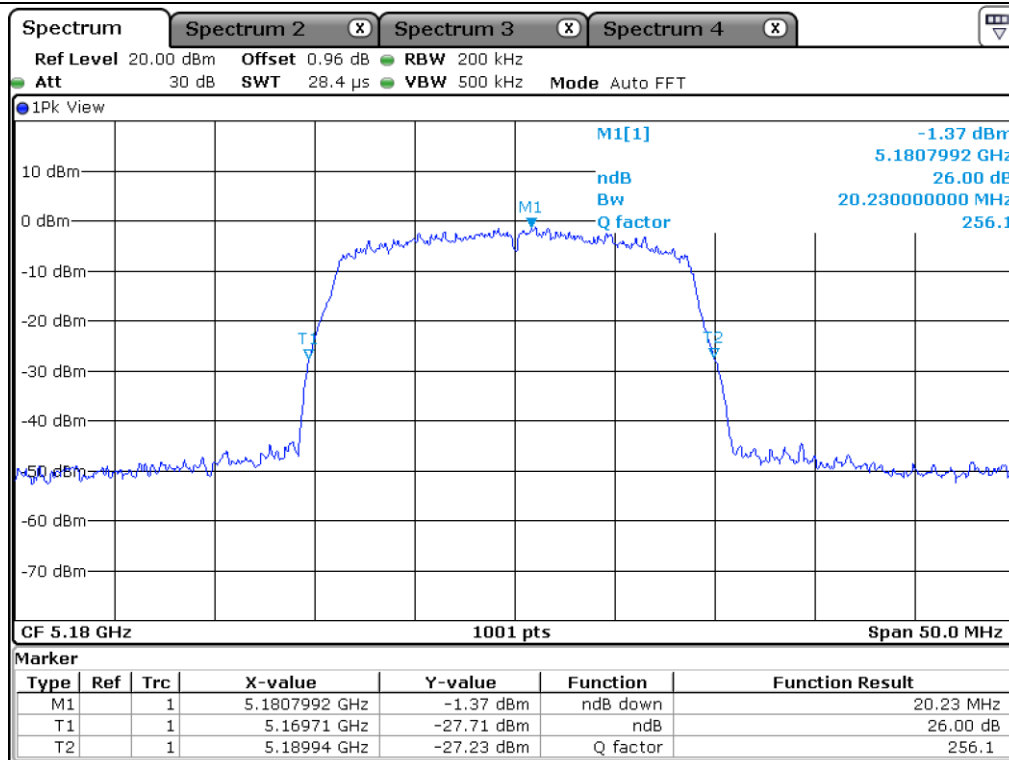

Low Channel (5 180 MHz)

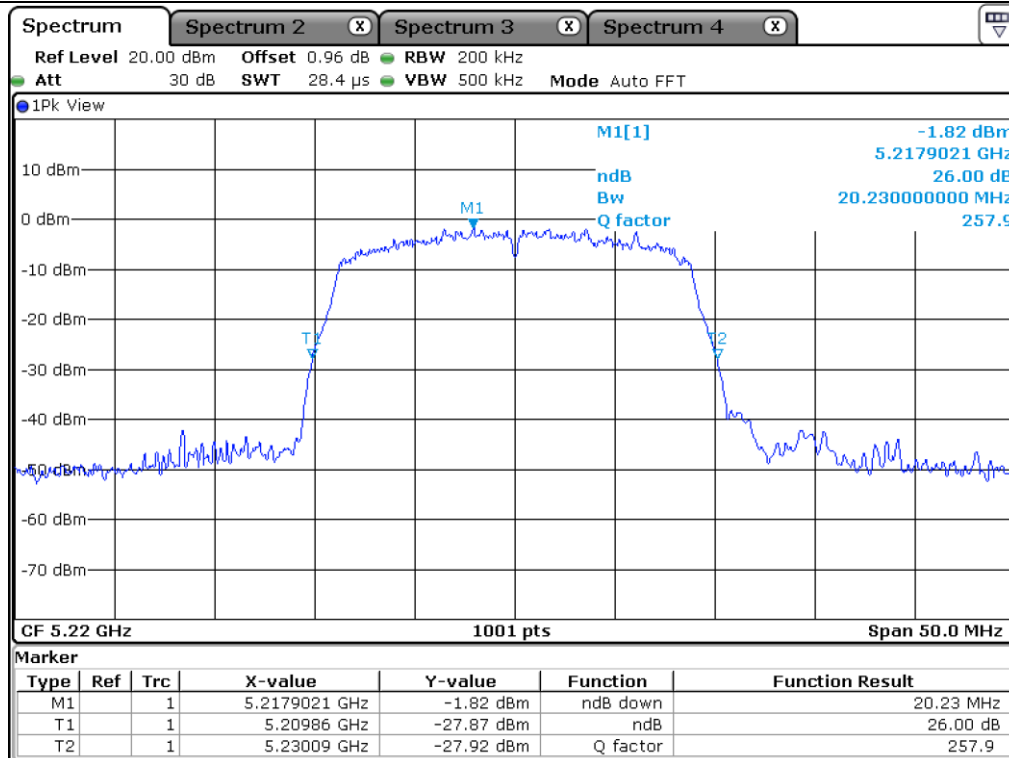


Middle Channel (5 220 MHz)


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.


OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

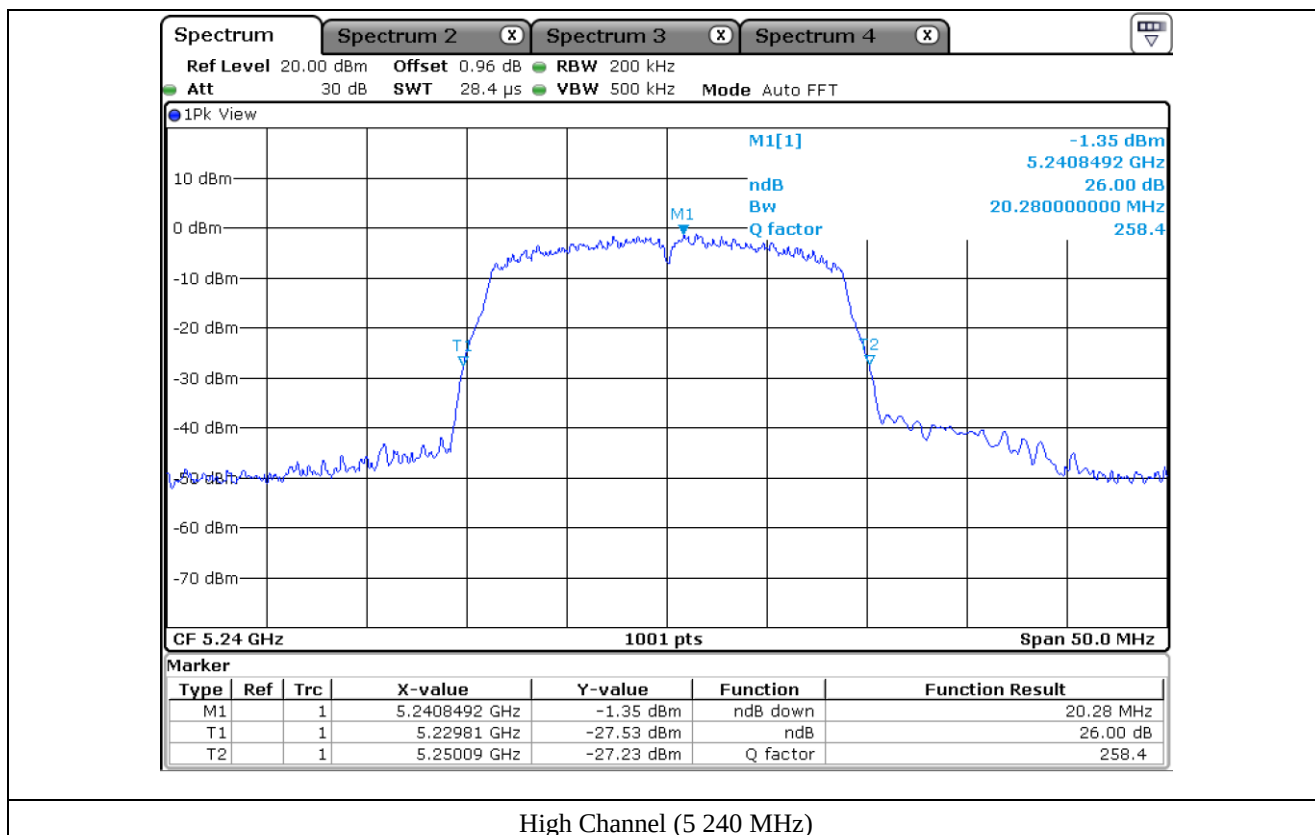

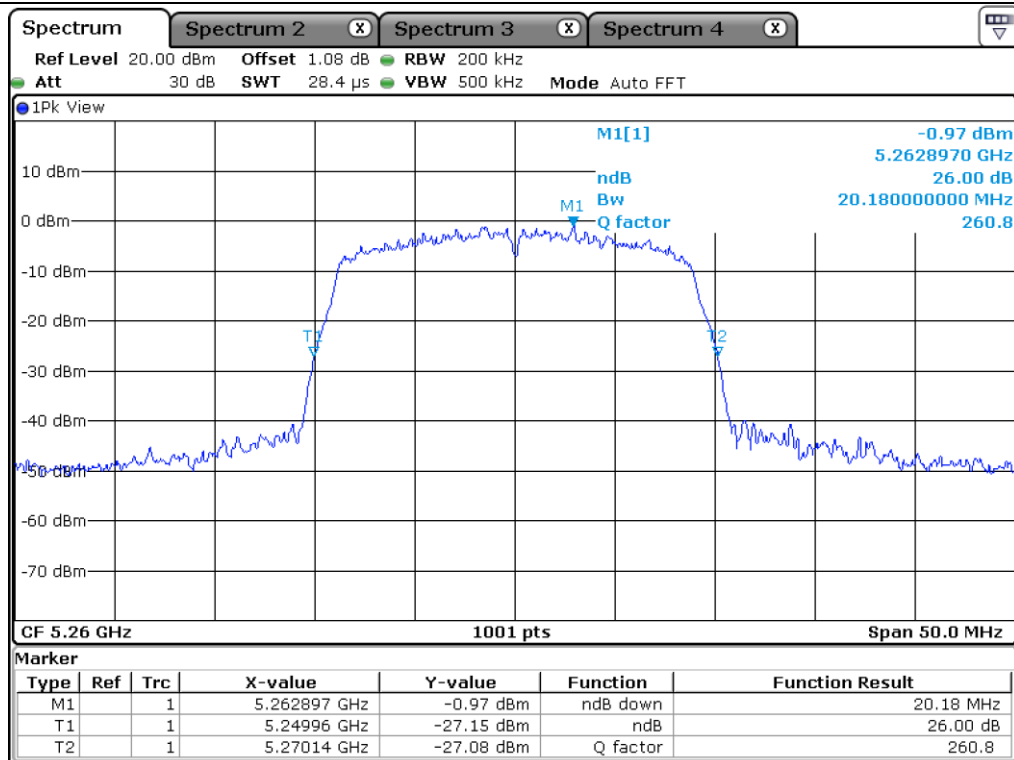

Low Channel (5 260 MHz)

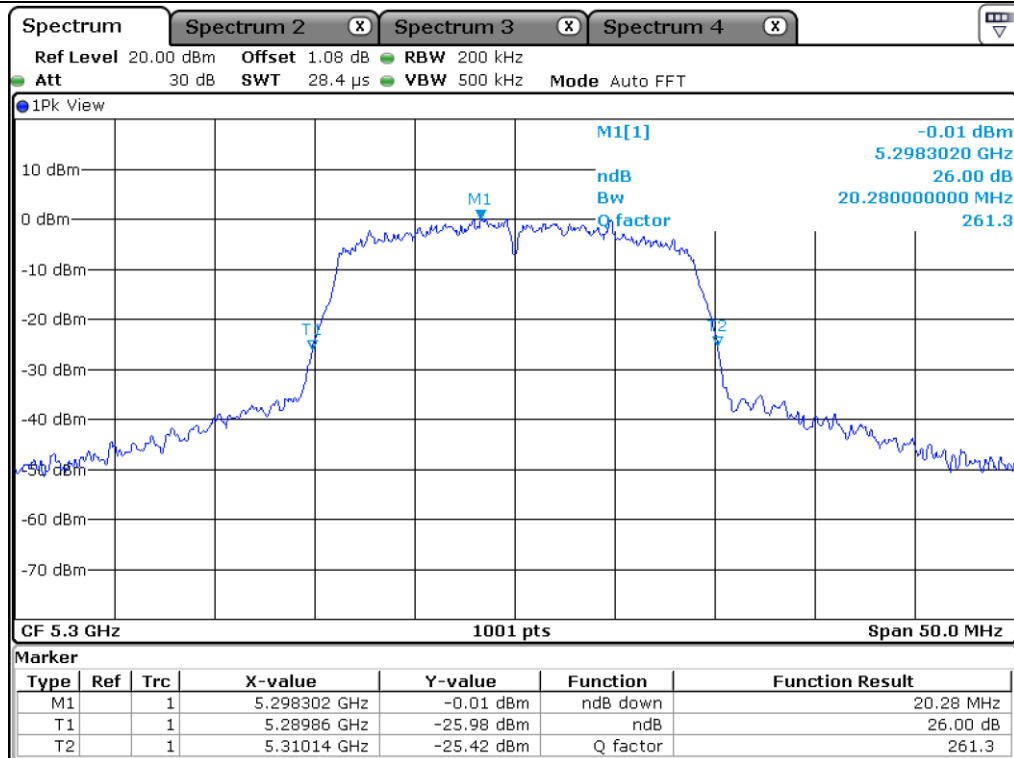

Middle Channel (5 300 MHz)