


**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (366) / (417) Pages

Worst Case Mode :	802.11a-ANT1
Worst Case Transfer Rate :	6 Mbps
Distance of Measurements :	3 Meters
Operating Frequency :	5 975 MHz
Channel :	5

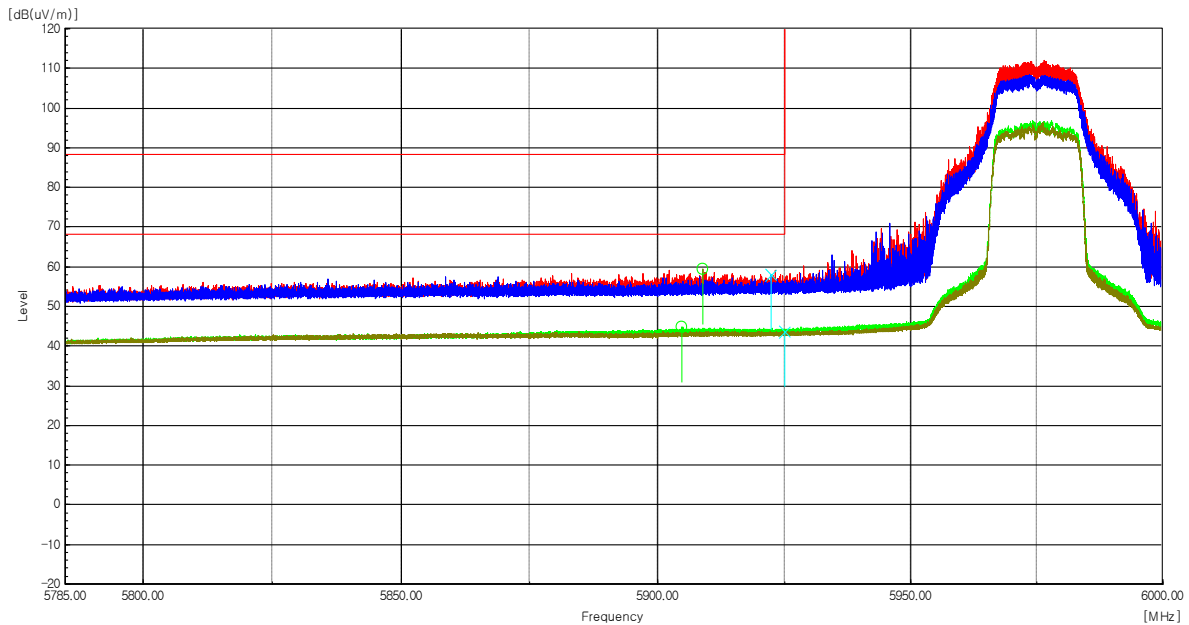

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 908.93	H	53.1	6.2	-----	59.30	-----	88.20	-----	28.90	-----	Peak
5 904.79	H	38.5	6.2	0.14	-----	44.84	-----	68.20	-----	23.36	Average
5 922.39	V	51.6	6.3	-----	57.90	-----	88.20	-----	30.30	-----	Peak
5 924.95	V	37.4	6.3	0.14	-----	43.84	-----	68.20	-----	24.36	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (367) / (417) Pages

Worst Case Mode :	802.11a-ANT1
Worst Case Transfer Rate :	6 Mbps
Distance of Measurements :	3 Meters
Operating Frequency :	7 095 MHz
Channel :	229

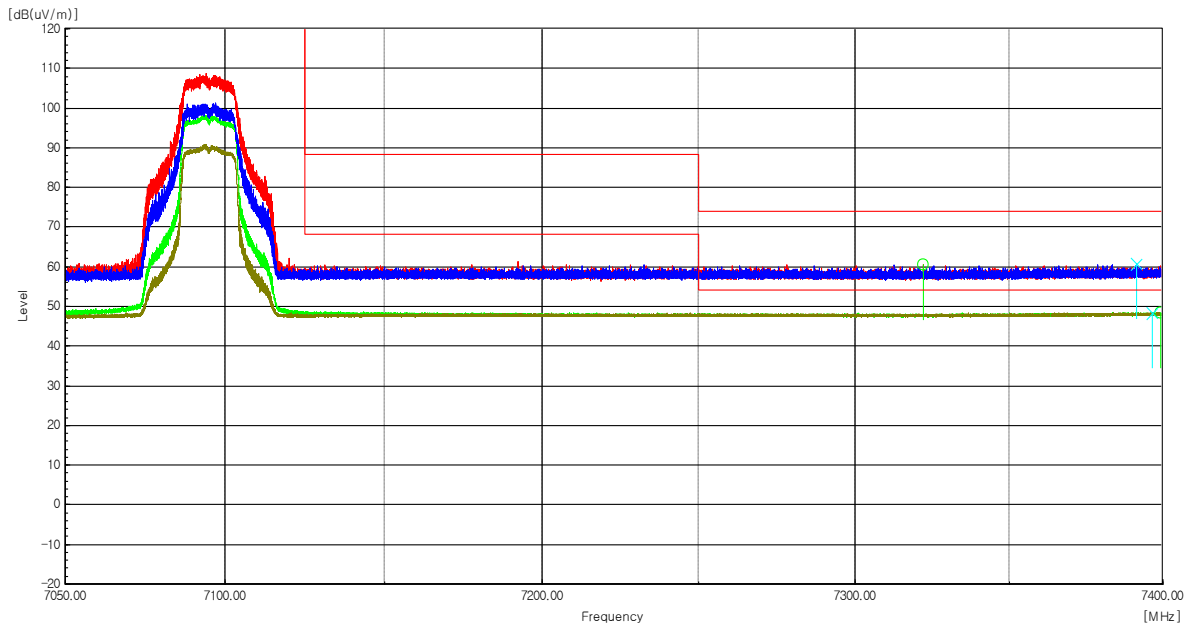

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
7 322.20	H	51.3	9.1	-----	60.40	-----	74.00	-----	13.60	-----	Peak
7 399.29	H	39.2	9.2	0.14	-----	48.54	-----	54.00	-----	5.46	Average
7 391.42	V	51.5	9.2	-----	60.70	-----	74.00	-----	13.30	-----	Peak
7 396.49	V	39.2	9.2	0.14	-----	48.54	-----	54.00	-----	5.46	Average

Radiated Restricted Band Edge Plot

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (368) / (417) Pages

Test Mode : Transmitter (802.11ax_HE20_26T)

The requirements are:

☒ Complies

Ch.1(5 955 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.45(6 175 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.93(6 415 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.97(6 435 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.105(6 475 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.113(6 515 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.117(6 535 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.149(6 695 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.181(6 855 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (369) / (417) Pages

Ch.185(6 875 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.209(6 995 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.229(7 095 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.233(7 115 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Peak result = Reading + c.f (Correction factor)
Average result = Reading + c.f (Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp gain
4. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (370) / (417) Pages

Worst Case Mode :	802.11ax_HE20_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 955 MHz
Channel :	1

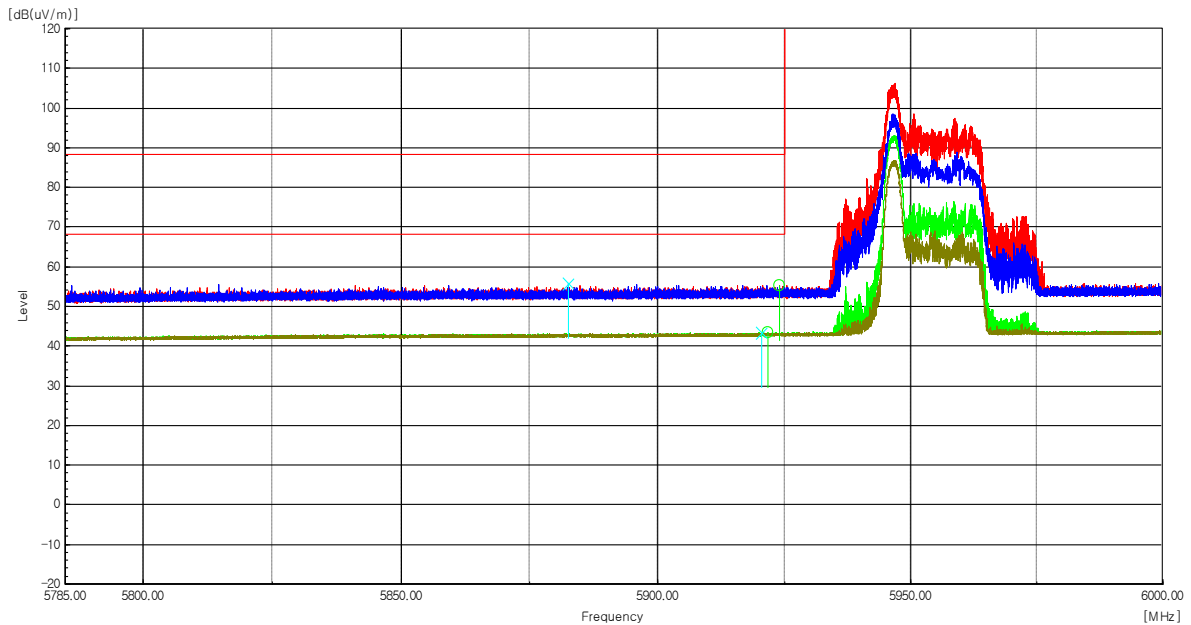

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 924.00	H	49.0	6.3	-----	55.30	-----	88.20	-----	32.90	-----	Peak
5 921.66	H	37.1	6.3	0.22	-----	43.62	-----	68.20	-----	24.58	Average
5 882.49	V	49.8	6.1	-----	55.90	-----	88.20	-----	32.30	-----	Peak
5 920.52	V	37.1	6.3	0.22	-----	43.62	-----	68.20	-----	24.58	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (371) / (417) Pages

Worst Case Mode :	802.11ax_HE20_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 095 MHz
Channel :	229

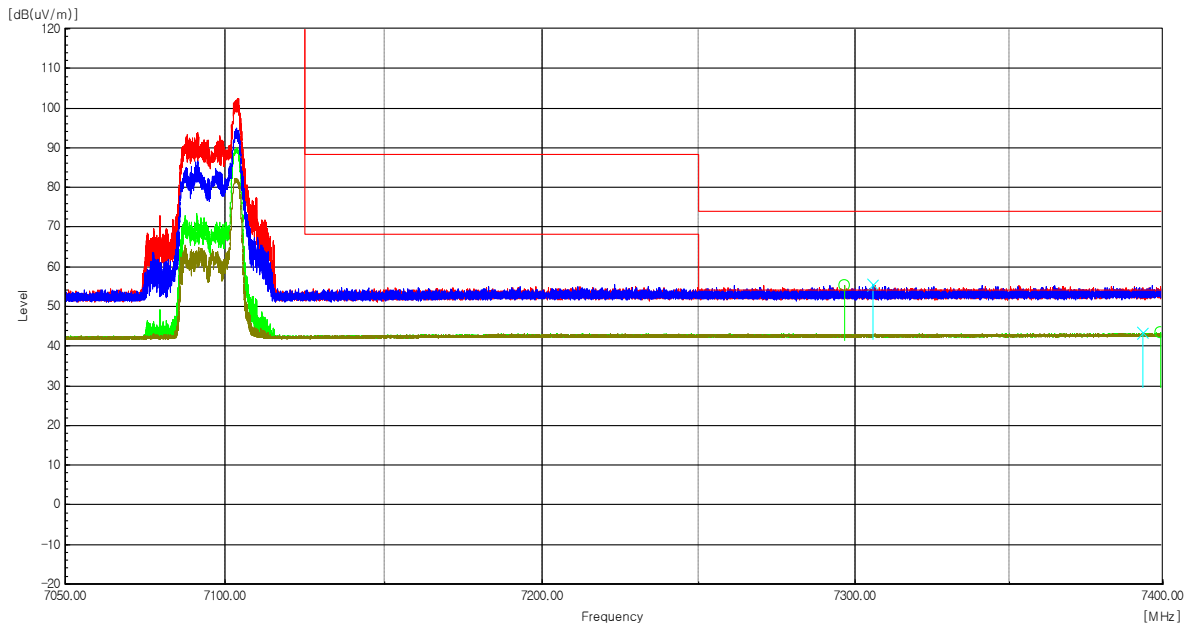

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
7 296.86	H	46.1	9.1	-----	55.20	-----	74.00	-----	18.80	-----	Peak
7 399.16	H	34.1	9.2	0.22	-----	43.52	-----	54.00	-----	10.48	Average
7 305.96	V	46.3	9.1	-----	55.40	-----	74.00	-----	18.60	-----	Peak
7 393.52	V	34.1	9.2	0.22	-----	43.52	-----	54.00	-----	10.48	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (372) / (417) Pages

Worst Case Mode :	802.11ax_HE20_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 115 MHz
Channel :	233

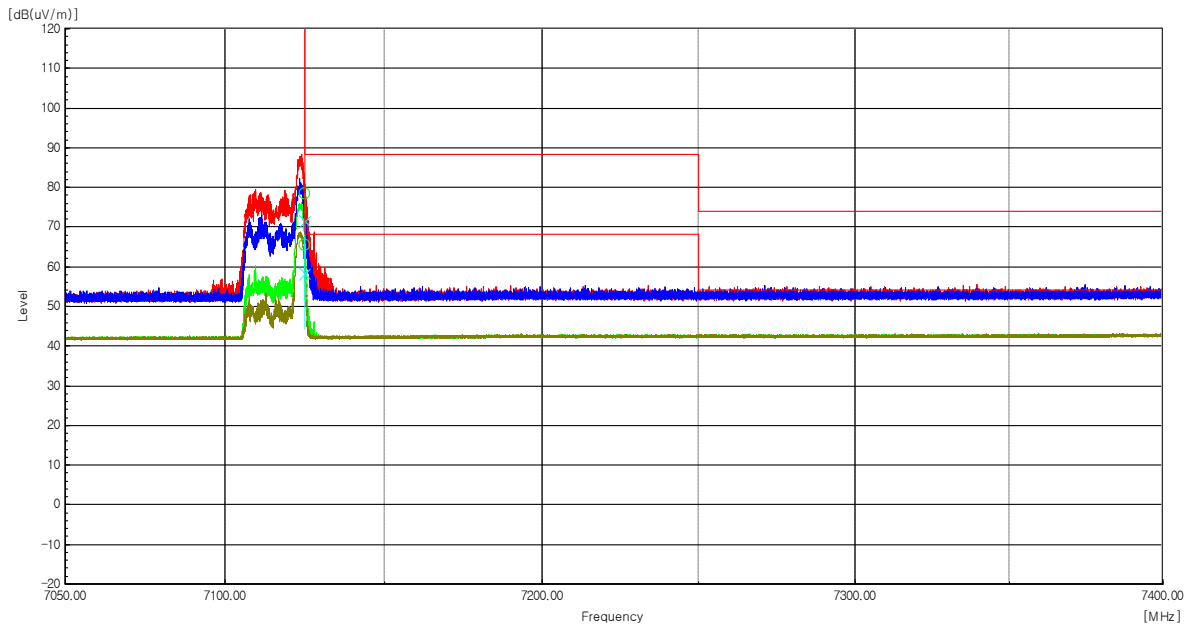

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
7 125.03	H	69.8	8.7	-----	78.50	-----	88.20	-----	9.70	-----	Peak
7 125.02	H	56.9	8.7	0.22	-----	65.82	-----	68.20	-----	2.38	Average
7 125.09	V	62.7	8.7	-----	71.40	-----	88.20	-----	16.80	-----	Peak
7 125.00	V	49.7	8.7	0.22	-----	58.62	-----	68.20	-----	9.58	Average

Radiated Restricted Band Edge Plot



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2026-00064
Page (373) / (417) Pages

Test Mode : Transmitter (802.11ax_HE20_52T)

The requirements are:

☒ Complies

Worst Case Mode :	802.11ax_HE20_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 955 MHz
Channel :	1

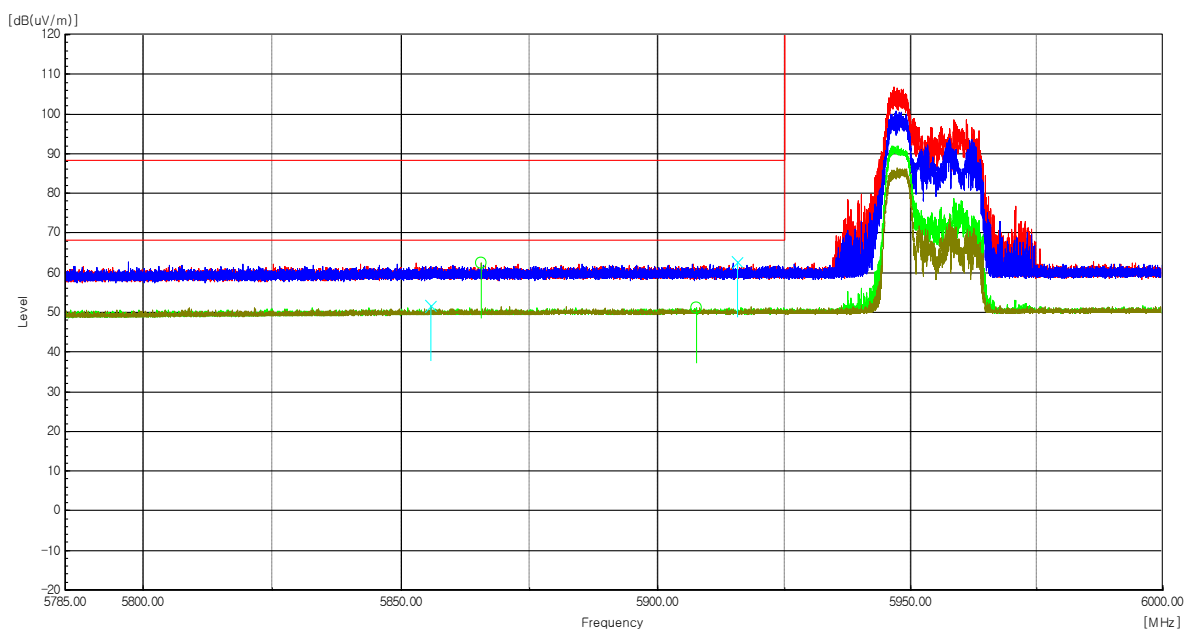

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 865.55	H	56.5	6.0	----	62.50	----	88.20	----	25.70	----	Peak
5 907.64	H	44.9	6.2	0.23	----	51.33	----	68.20	----	16.87	Average
5 915.79	V	56.5	6.2	----	62.70	----	88.20	----	25.50	----	Peak
5 855.76	V	45.6	6.0	0.23	----	51.83	----	68.20	----	16.37	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (374) / (417) Pages

Worst Case Mode :	802.11ax_HE20_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 095 MHz
Channel :	229

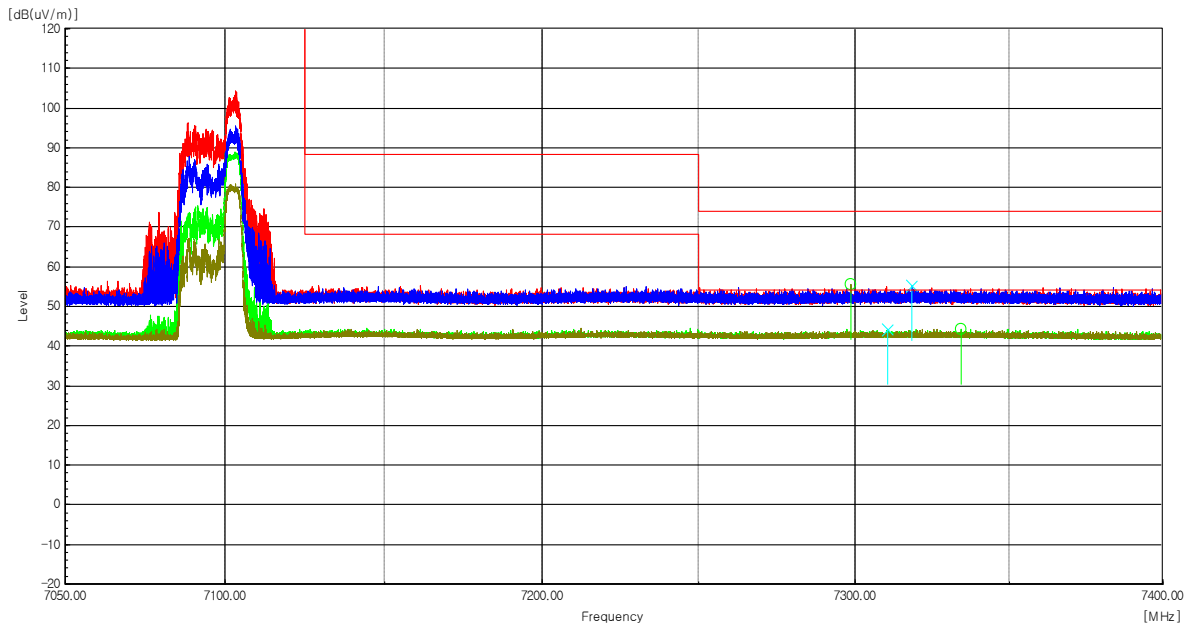

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
7 298.72	H	46.5	9.1	-----	55.60	-----	74.00	-----	18.40	-----	Peak
7 334.30	H	35.2	9.1	0.23	-----	44.53	-----	54.00	-----	9.47	Average
7 318.46	V	46.1	9.1	-----	55.20	-----	74.00	-----	18.80	-----	Peak
7 310.68	V	35.1	9.1	0.23	-----	44.43	-----	54.00	-----	9.57	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (375) / (417) Pages

Worst Case Mode :	802.11ax_HE20_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 115 MHz
Channel :	233

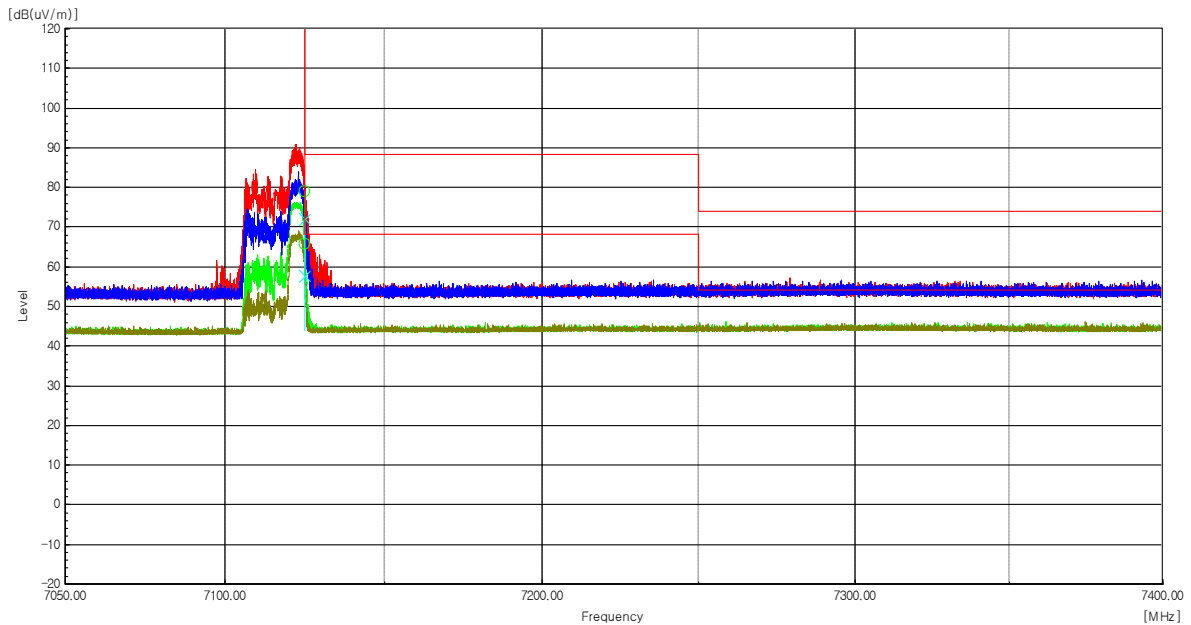

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
7 125.00	H	70.1	8.7	-----	78.80	-----	88.20	-----	9.40	-----	Peak
7 125.00	H	57.1	8.7	0.23	-----	66.03	-----	68.20	-----	2.17	Average
7 125.07	V	63.4	8.7	-----	72.10	-----	88.20	-----	16.10	-----	Peak
7 125.00	V	49.0	8.7	0.23	-----	57.93	-----	68.20	-----	10.27	Average

Radiated Restricted Band Edge Plot



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2026-00064
Page (376) / (417) Pages

Test Mode : Transmitter (802.11ax_HE20_106T)

The requirements are:

☒ Complies

Worst Case Mode :	802.11ax_HE20_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 955 MHz
Channel :	1

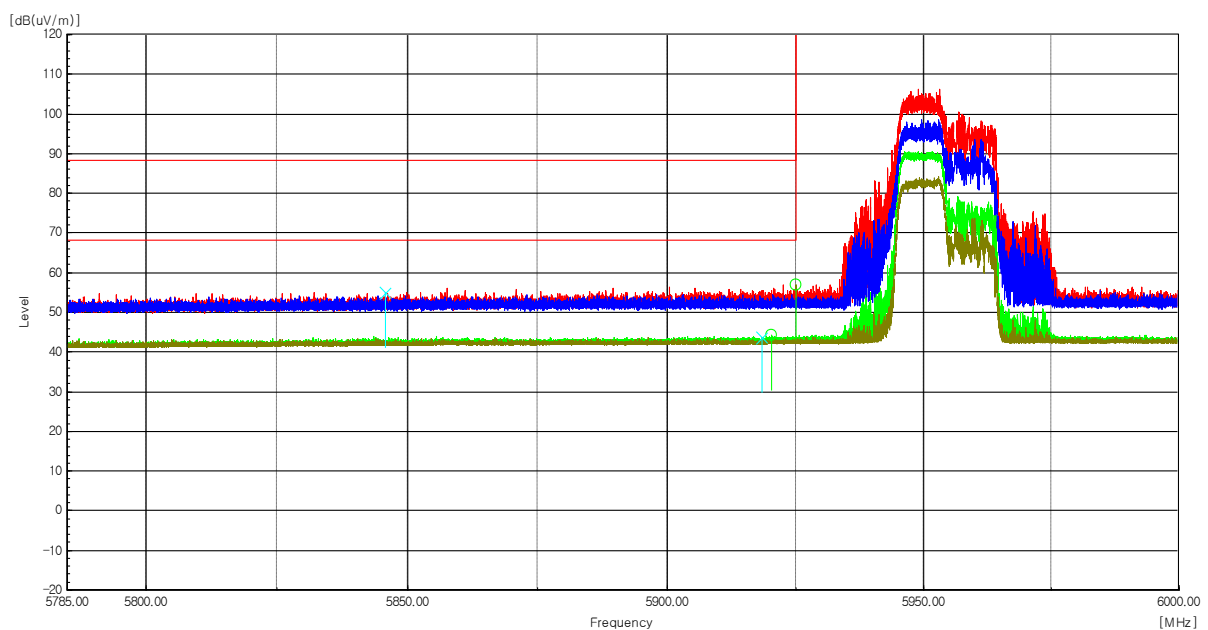

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 924.97	H	50.7	6.3	-----	57.00	-----	88.20	-----	31.20	-----	Peak
5 920.31	H	37.8	6.3	0.25	-----	44.35	-----	68.20	-----	23.85	Average
5 845.80	V	49.0	5.9	-----	54.90	-----	88.20	-----	33.30	-----	Peak
5 918.43	V	37.6	6.2	0.25	-----	44.05	-----	68.20	-----	24.15	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (377) / (417) Pages

Worst Case Mode :	802.11ax_HE20_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 095 MHz
Channel :	229

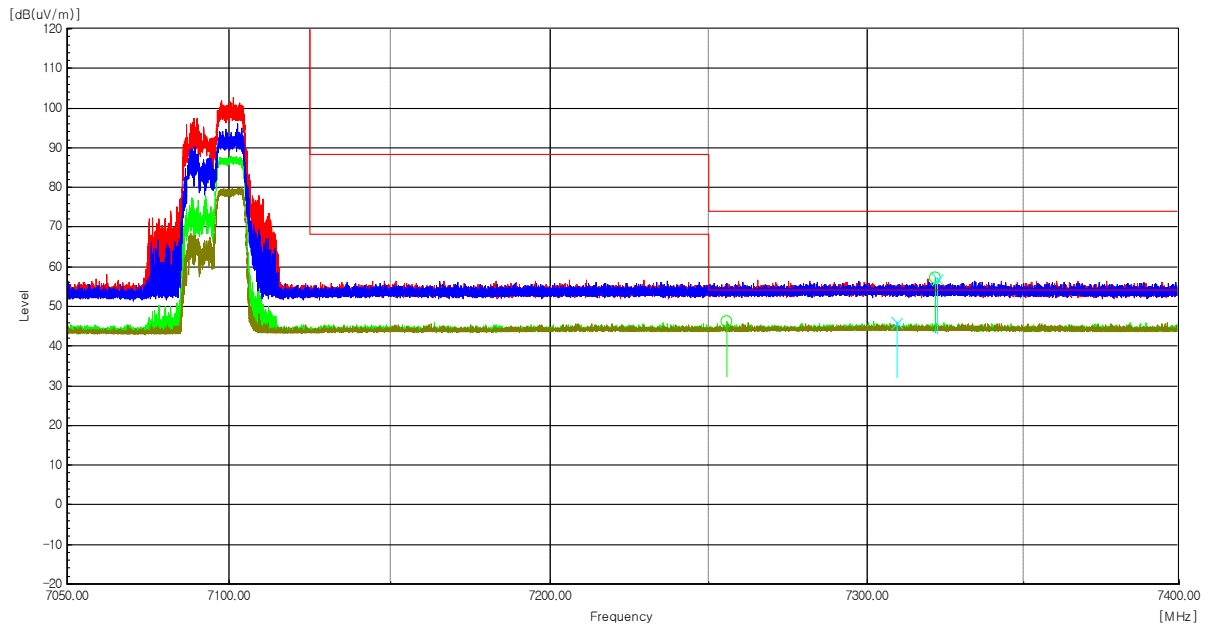

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
7 321.95	H	48.0	9.1	-----	57.10	-----	74.00	-----	16.90	-----	Peak
7 255.44	H	37.0	9.1	0.25	-----	46.35	-----	54.00	-----	7.65	Average
7 322.55	V	47.7	9.1	-----	56.80	-----	74.00	-----	17.20	-----	Peak
7 309.73	V	36.9	9.1	0.25	-----	46.25	-----	54.00	-----	7.75	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (378) / (417) Pages

Worst Case Mode :	802.11ax_HE20_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 115 MHz
Channel :	233

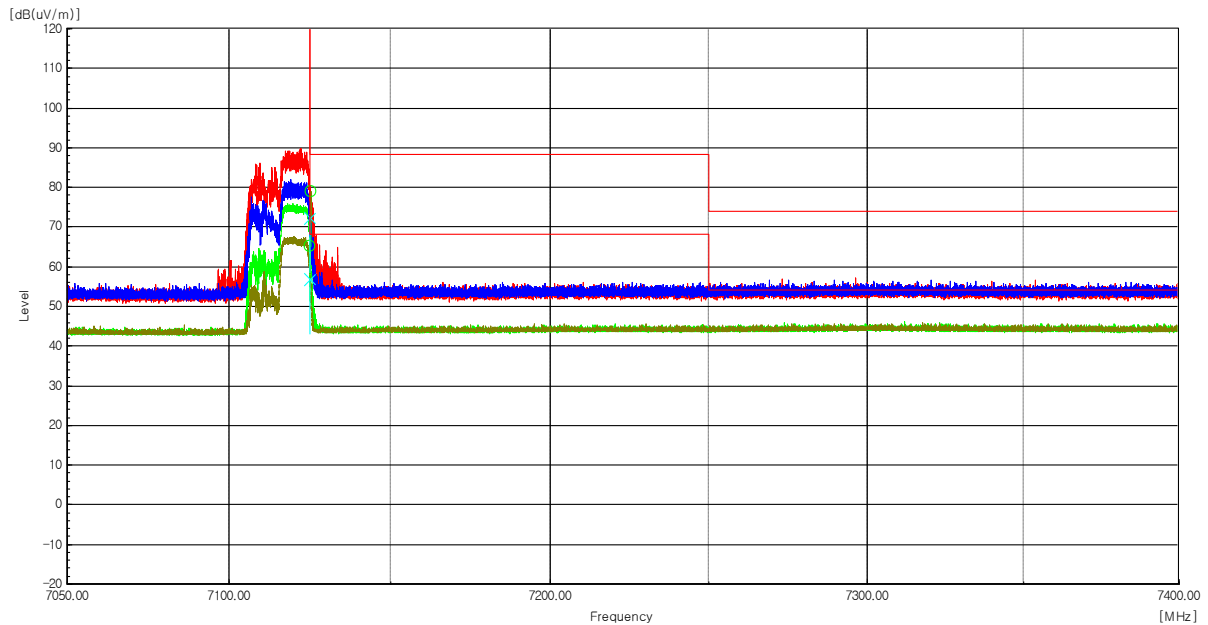

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
7 125.18	H	70.2	8.7	-----	78.90	-----	88.20	-----	9.30	-----	Peak
7 125.02	H	56.6	8.7	0.25	-----	65.55	-----	68.20	-----	2.65	Average
7 125.07	V	63.7	8.7	-----	72.40	-----	88.20	-----	15.80	-----	Peak
7 125.02	V	48.2	8.7	0.25	-----	57.15	-----	68.20	-----	11.05	Average

Radiated Restricted Band Edge Plot

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (379) / (417) Pages

Test Mode : Transmitter (802.11ax_HE20_242T)

The requirements are:

☒ Complies

Ch.1(5 955 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.45(6 175 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
12 348.34	H	44.4	14.6	-----	59.00	-----	74.00	-----	15.00	-----	Peak
12 348.24	H	32.9	14.6	0.29	-----	47.79	-----	54.00	-----	6.21	Average
12 346.75	V	47.1	14.6	-----	61.70	-----	74.00	-----	12.30	-----	Peak
12 351.61	V	34.0	14.6	0.29	-----	48.89	-----	54.00	-----	5.11	Average

Ch.93(6 415 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
12 829.98	H	43.0	16.2	-----	59.20	-----	74.00	-----	14.80	-----	Peak
12 831.96	H	32.2	16.2	0.29	-----	48.69	-----	54.00	-----	5.31	Average
12 826.01	V	48.2	16.1	-----	64.30	-----	74.00	-----	9.70	-----	Peak
12 830.77	V	35.3	16.2	0.29	-----	51.79	-----	54.00	-----	2.21	Average

Ch.97(6 435 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
12 871.05	H	43.2	16.6	-----	59.80	-----	74.00	-----	14.20	-----	Peak
12 867.28	H	31.9	16.5	0.29	-----	48.69	-----	54.00	-----	5.31	Average
12 870.15	V	48.3	16.6	-----	64.90	-----	74.00	-----	9.10	-----	Peak
12 870.15	V	35.0	16.6	0.29	-----	51.89	-----	54.00	-----	2.11	Average

Ch.105(6 475 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
12 946.54	H	44.1	17.1	-----	61.20	-----	74.00	-----	12.80	-----	Peak
12 949.12	H	32.2	17.1	0.29	-----	49.59	-----	54.00	-----	4.41	Average
12 950.51	V	48.3	17.1	-----	65.40	-----	74.00	-----	8.60	-----	Peak
12 950.81	V	34.5	17.1	0.29	-----	51.89	-----	54.00	-----	2.11	Average

Ch.113(6 515 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
13 018.96	H	42.6	17.3	-----	59.90	-----	74.00	-----	14.10	-----	Peak
13 030.07	H	31.7	17.2	0.29	-----	49.19	-----	54.00	-----	4.81	Average
13 030.27	V	49.6	17.2	-----	66.80	-----	74.00	-----	7.20	-----	Peak
13 030.17	V	34.1	17.2	0.29	-----	51.59	-----	54.00	-----	2.41	Average

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (380) / (417) Pages

Ch.117(6 535 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
13 140.29	H	42.4	17.5	-----	59.90	-----	74.00	-----	14.10	-----	Peak
13 070.55	H	31.4	17.1	0.29	-----	48.79	-----	54.00	-----	5.21	Average
13 071.54	V	47.2	17.1	-----	64.30	-----	74.00	-----	9.70	-----	Peak
13 068.66	V	34.2	17.1	0.29	-----	51.59	-----	54.00	-----	2.41	Average

Ch.149(6 695 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
13 345.74	H	42.8	18.1	-----	60.90	-----	74.00	-----	13.10	-----	Peak
13 393.55	H	32.2	18.1	0.29	-----	50.59	-----	54.00	-----	3.41	Average
13 386.21	V	46.8	18.1	-----	64.90	-----	74.00	-----	9.10	-----	Peak
13 390.28	V	33.5	18.1	0.29	-----	51.89	-----	54.00	-----	2.11	Average

Ch.181(6 855 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.185(6 875 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.209(6 995 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.229(7 095 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.233(7 115 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Peak result = Reading + c.f (Correction factor)
Average result = Reading + c.f (Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp gain
4. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (381) / (417) Pages

Worst Case Mode :	802.11ax_HE20_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 955 MHz
Channel :	1

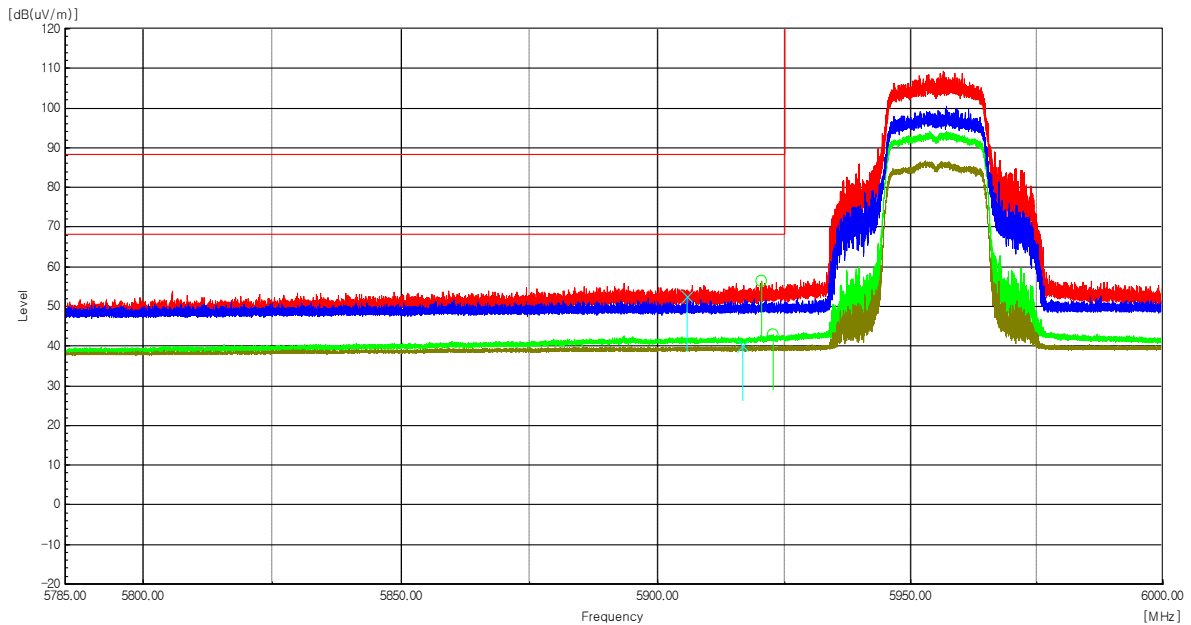

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 920.53	H	50.1	6.3	-----	56.40	-----	88.20	-----	31.80	-----	Peak
5 922.84	H	36.4	6.3	0.28	-----	42.98	-----	68.20	-----	25.22	Average
5 905.79	V	46.4	6.2	-----	52.60	-----	88.20	-----	35.60	-----	Peak
5 916.76	V	33.9	6.2	0.28	-----	40.38	-----	68.20	-----	27.82	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (382) / (417) Pages

Worst Case Mode :	802.11ax_HE20_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 095 MHz
Channel :	229

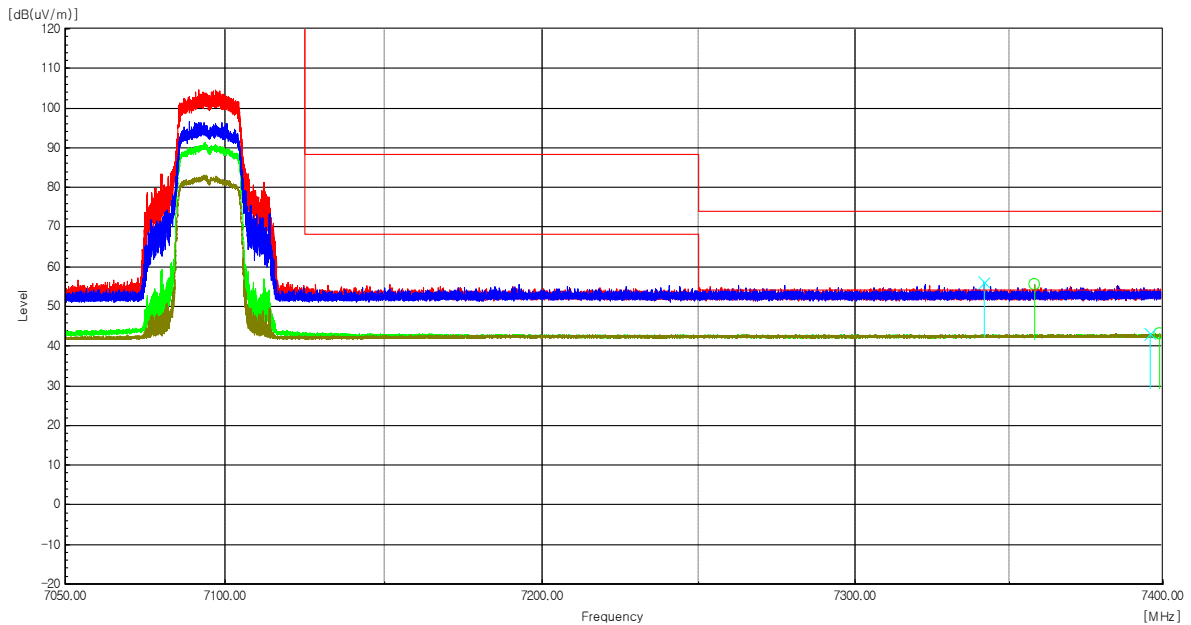

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
7 358.27	H	46.3	9.1	----	55.40	----	74.00	----	18.60	----	Peak
7 399.10	H	33.9	9.2	0.28	----	43.38	----	54.00	----	10.62	Average
7 341.76	V	47.0	9.1	----	56.10	----	74.00	----	17.90	----	Peak
7 395.83	V	33.9	9.2	0.28	----	43.38	----	54.00	----	10.62	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (383) / (417) Pages

Worst Case Mode :	802.11ax_HE20_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 115 MHz
Channel :	233

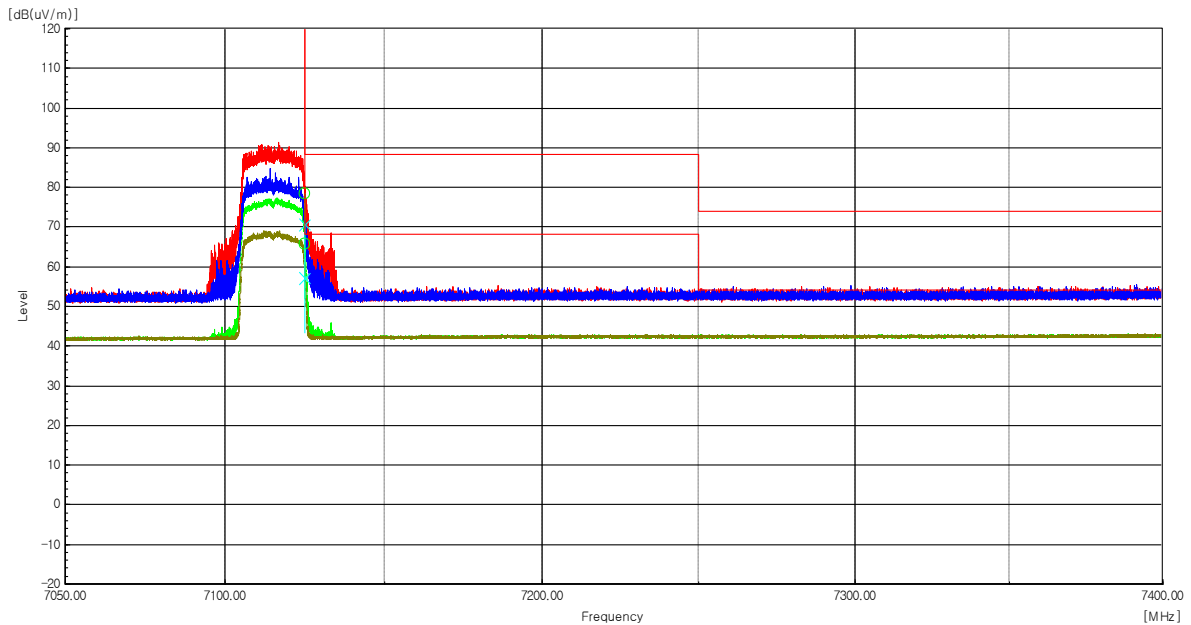

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
7 125.06	H	69.6	8.7	-----	78.30	-----	88.20	-----	9.90	-----	Peak
7 125.00	H	57.1	8.7	0.28	-----	66.08	-----	68.20	-----	2.12	Average
7 125.06	V	61.9	8.7	-----	70.60	-----	88.20	-----	17.60	-----	Peak
7 125.00	V	48.3	8.7	0.28	-----	57.28	-----	68.20	-----	10.92	Average

Radiated Restricted Band Edge Plot

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (384) / (417) Pages

Test Mode : Transmitter (802.11ax_HE40_26T)

The requirements are:

☒ Complies

Ch.3(5 965 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.43(6 165 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.91(6 405 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.99(6 445 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.107(6 485 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.115(6 525 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.147(6 685 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.179(6 845 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.187(6 885 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (385) / (417) Pages

Ch.211(7 005 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.227(7 085 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Peak result = Reading + c.f (Correction factor)
Average result = Reading + c.f (Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp gain
4. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (386) / (417) Pages

Worst Case Mode :	802.11ax_HE40_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 965 MHz
Channel :	3

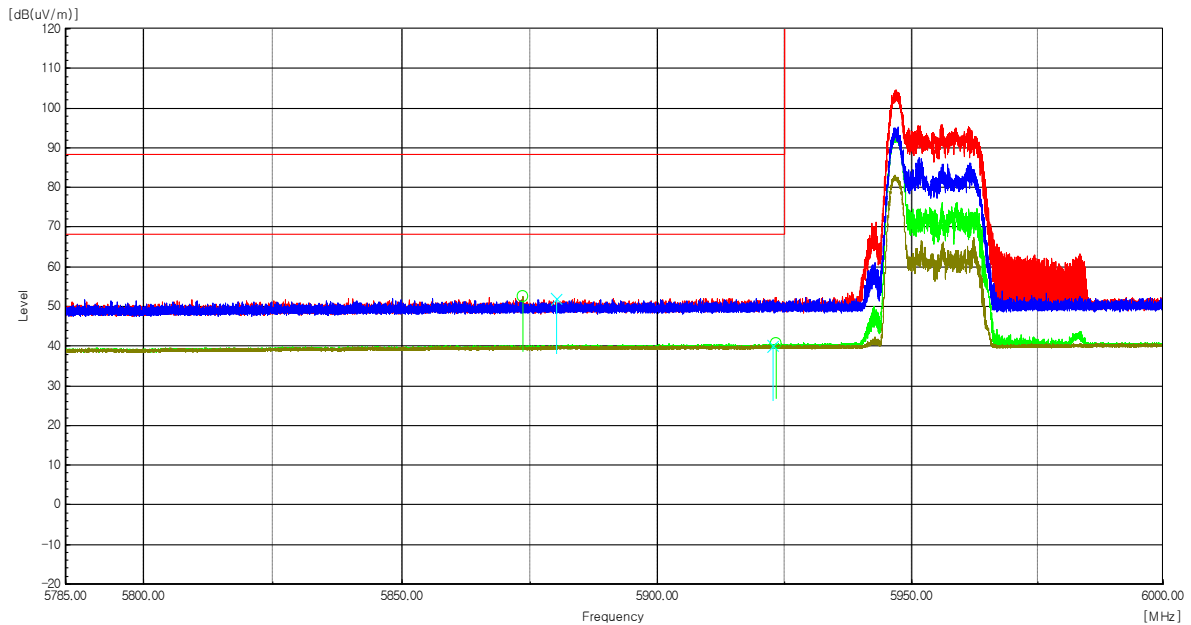

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 873.55	H	46.4	6.0	-----	52.40	-----	88.20	-----	35.80	-----	Peak
5 880.23	V	45.9	6.1	-----	52.00	-----	88.20	-----	36.20	-----	Peak
5 922.66	V	33.9	6.3	0.22	-----	40.42	-----	68.20	-----	27.78	Average
5 923.35	H	34.3	6.3	0.22	-----	40.82	-----	68.20	-----	27.38	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (387) / (417) Pages

Worst Case Mode :	802.11ax_HE40_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 085 MHz
Channel :	227

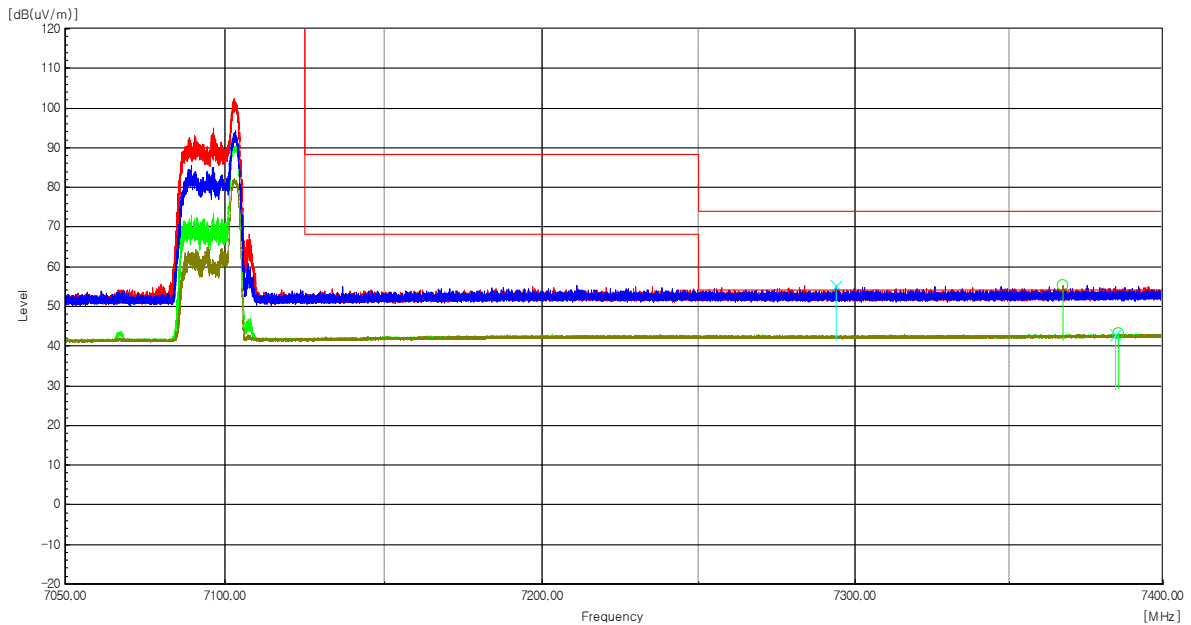

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
7 293.90	V	46.2	9.1	-----	55.30	-----	74.00	-----	18.70	-----	Peak
7 367.63	H	46.3	9.1	-----	55.40	-----	74.00	-----	18.60	-----	Peak
7 384.57	V	33.7	9.2	0.22	-----	43.12	-----	54.00	-----	10.88	Average
7 385.47	H	33.8	9.2	0.22	-----	43.22	-----	54.00	-----	10.78	Average

Radiated Restricted Band Edge Plot



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2026-00064
Page (388) / (417) Pages

Test Mode : Transmitter (802.11ax_HE40_52T)

The requirements are:

☒ Complies

Worst Case Mode :	802.11ax_HE40_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 965 MHz
Channel :	3

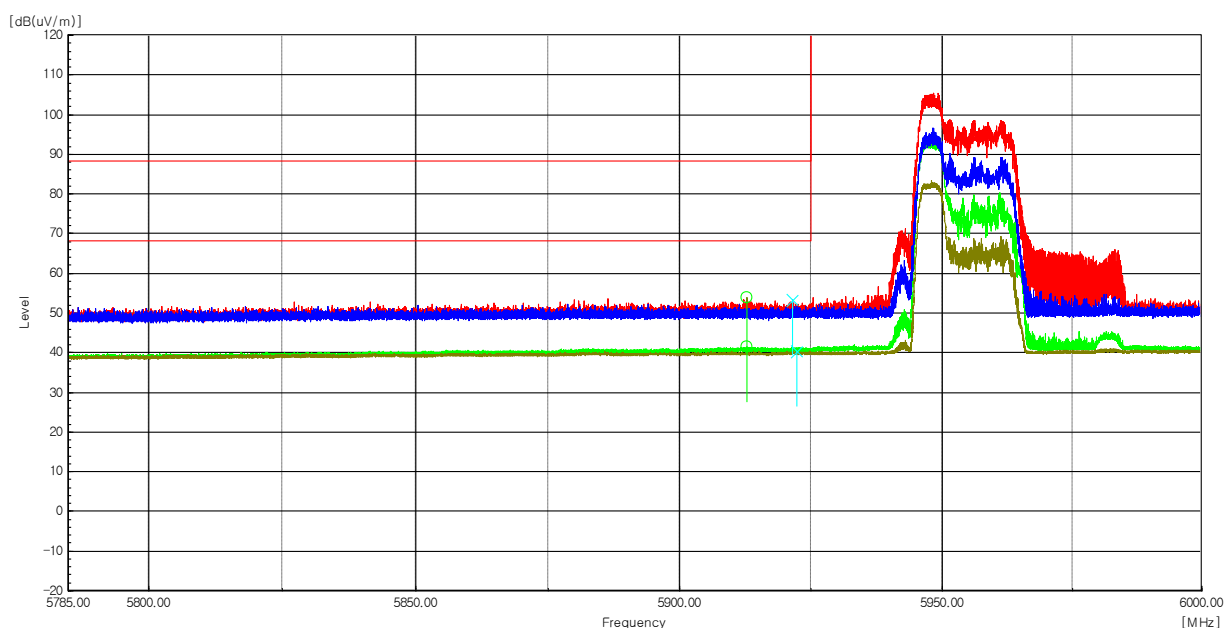

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 912.74	H	35.2	6.2	0.23	----	41.63	----	68.20	----	26.57	Average
5 912.83	H	47.7	6.2	----	53.90	----	88.20	----	34.30	----	Peak
5 921.41	V	46.9	6.3	----	53.20	----	88.20	----	35.00	----	Peak
5 922.31	V	34.1	6.3	0.23	----	40.63	----	68.20	----	27.57	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (389) / (417) Pages

Worst Case Mode :	802.11ax_HE40_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 085 MHz
Channel :	227

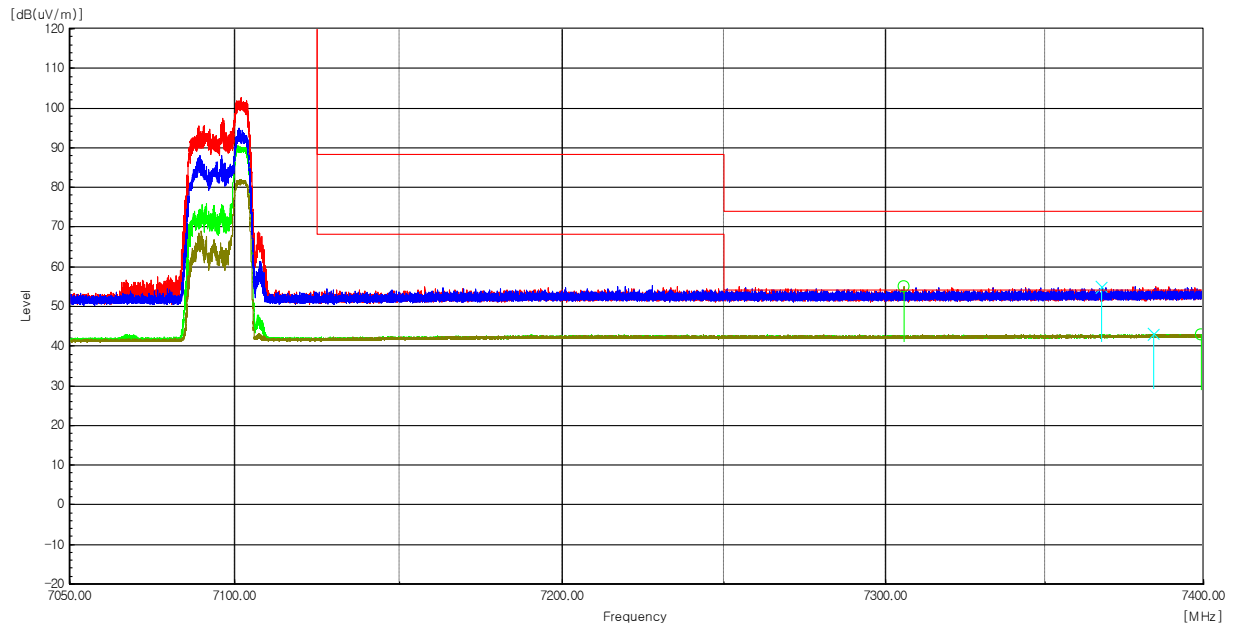

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
7 305.87	H	45.8	9.1	-----	54.90	-----	74.00	-----	19.10	-----	Peak
7 367.87	V	45.8	9.1	-----	54.90	-----	74.00	-----	19.10	-----	Peak
7 384.18	V	33.8	9.2	0.23	-----	43.23	-----	54.00	-----	10.77	Average
7 399.31	H	33.7	9.2	0.23	-----	43.13	-----	54.00	-----	10.87	Average

Radiated Restricted Band Edge Plot



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2026-00064
Page (390) / (417) Pages

Test Mode : Transmitter (802.11ax_HE40_106T)

The requirements are:

☒ Complies

Worst Case Mode :	802.11ax_HE40_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 965 MHz
Channel :	3

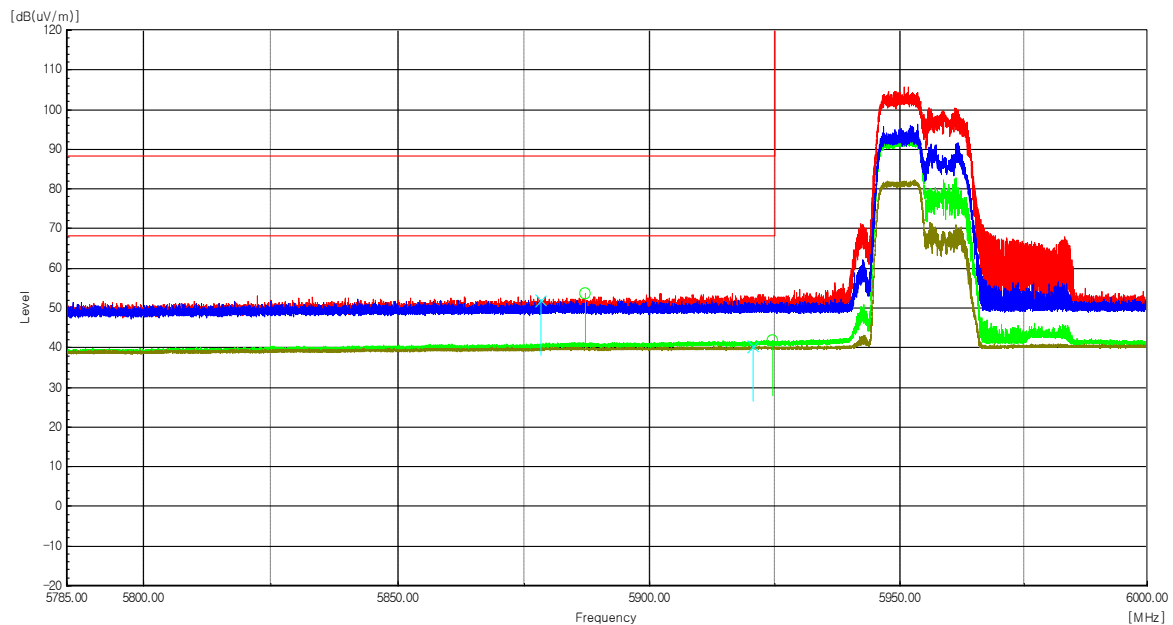

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 878.43	V	45.9	6.1	-----	52.00	-----	88.20	-----	36.20	-----	Peak
5 887.25	H	47.5	6.1	-----	53.60	-----	88.20	-----	34.60	-----	Peak
5 920.66	V	34.1	6.3	0.24	-----	40.64	-----	68.20	-----	27.56	Average
5 924.58	H	35.5	6.3	0.24	-----	42.04	-----	68.20	-----	26.16	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (391) / (417) Pages

Worst Case Mode :	802.11ax_HE20_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 085 MHz
Channel :	227

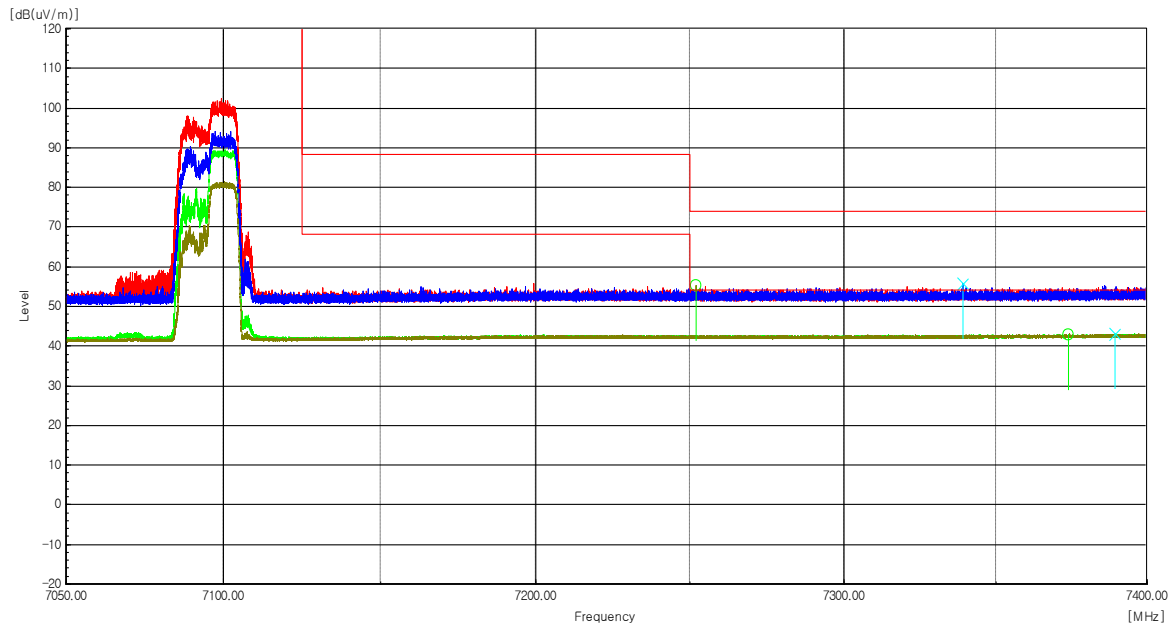

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
7 252.06	H	46.1	9.1	-----	55.20	-----	74.00	-----	18.80	-----	Peak
7 339.28	V	46.8	9.1	-----	55.90	-----	74.00	-----	18.10	-----	Peak
7 374.00	H	33.8	9.1	0.24	-----	43.14	-----	54.00	-----	10.86	Average
7 389.42	V	33.8	9.2	0.24	-----	43.24	-----	54.00	-----	10.76	Average

Radiated Restricted Band Edge Plot



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2026-00064
Page (392) / (417) Pages

Test Mode : Transmitter (802.11ax_HE40_242T)

The requirements are:

☒ Complies

Worst Case Mode :	802.11ax_HE40_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 965 MHz
Channel :	3

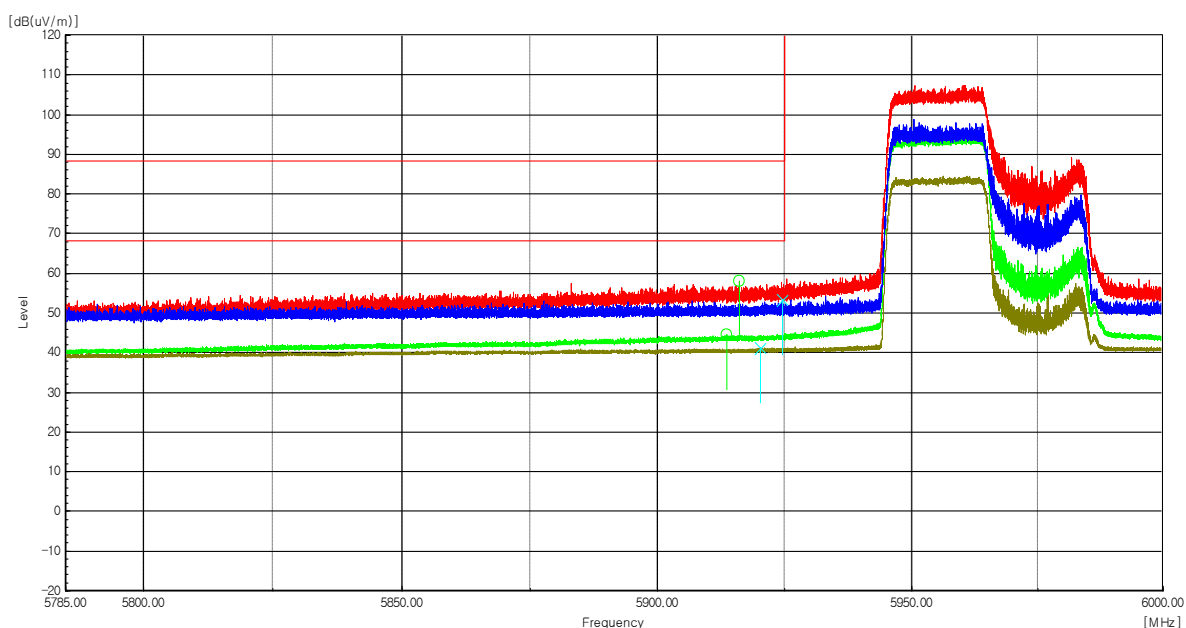

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 913.65	H	38.2	6.2	0.28	----	44.68	----	68.20	----	23.52	Average
5 916.04	H	51.7	6.2	----	57.90	----	88.20	----	30.30	----	Peak
5 920.14	V	34.8	6.3	0.28	----	41.38	----	68.20	----	26.82	Average
5 924.46	V	46.9	6.3	----	53.20	----	88.20	----	35.00	----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (393) / (417) Pages

Worst Case Mode :	802.11ax_HE40_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 085 MHz
Channel :	227

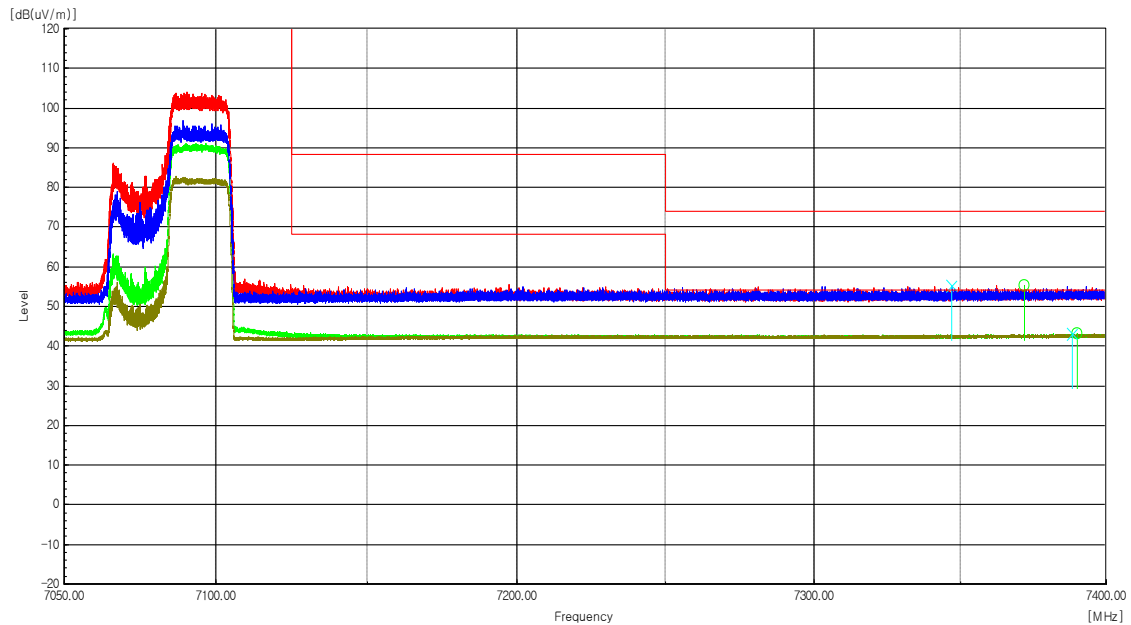

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
7 347.18	V	46.2	9.1	-----	55.30	-----	74.00	-----	18.70	-----	Peak
7 371.83	H	46.1	9.1	-----	55.20	-----	74.00	-----	18.80	-----	Peak
7 388.41	V	33.8	9.2	0.28	-----	43.28	-----	54.00	-----	10.72	Average
7 390.10	H	33.8	9.2	0.28	-----	43.28	-----	54.00	-----	10.72	Average

Radiated Restricted Band Edge Plot

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (394) / (417) Pages

Test Mode : Transmitter (802.11ax_HE40_484T)

The requirements are:

☒ Complies

Ch.3(5 965 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.43(6 165 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.91(6 405 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
12 857.26	H	43.9	16.5	-----	60.40	-----	74.00	-----	13.60	-----	Peak
12 828.98	H	32.4	16.2	0.28	-----	48.88	-----	54.00	-----	5.12	Average
12 817.08	V	47.1	16.0	-----	63.10	-----	74.00	-----	10.90	-----	Peak
12 810.04	V	34.3	16.0	0.28	-----	50.58	-----	54.00	-----	3.42	Average

Ch.99(6 445 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
12 889.30	H	43.3	16.7	-----	60.00	-----	74.00	-----	14.00	-----	Peak
12 953.29	H	31.7	17.2	0.28	-----	49.18	-----	54.00	-----	4.82	Average
12 900.51	V	47.4	16.8	-----	64.20	-----	74.00	-----	9.80	-----	Peak
12 889.80	V	34.6	16.7	0.28	-----	51.58	-----	54.00	-----	2.42	Average

Ch.107(6 485 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
12 979.18	H	43.1	17.3	-----	60.40	-----	74.00	-----	13.60	-----	Peak
12 983.15	H	32.1	17.3	0.28	-----	49.68	-----	54.00	-----	4.32	Average
12 960.92	V	47.9	17.2	-----	65.10	-----	74.00	-----	8.90	-----	Peak
12 970.05	V	34.2	17.2	0.28	-----	51.68	-----	54.00	-----	2.32	Average

Ch.115(6 525 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
13 052.19	H	43.8	17.2	-----	61.00	-----	74.00	-----	13.00	-----	Peak
13 054.47	H	31.8	17.1	0.28	-----	49.18	-----	54.00	-----	4.82	Average
13 045.35	V	46.7	17.2	-----	63.90	-----	74.00	-----	10.10	-----	Peak
13 052.19	V	33.6	17.2	0.28	-----	51.08	-----	54.00	-----	2.92	Average

Ch.147(6 685 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (395) / (417) Pages

Ch.179(6 845 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.187(6 885 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
13 769.55	V	32.2	19.2	0.28	----	51.68	----	54.00	----	2.32	Average
13 773.63	H	43.5	19.2	----	62.70	----	74.00	----	11.30	----	Peak
14 002.80	V	42.9	19.6	----	62.50	----	74.00	----	11.50	----	Peak
14 004.16	H	31.7	19.6	0.28	----	51.58	----	54.00	----	2.42	Average

Ch.211(7 005 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
14 006.88	V	43.8	19.6	----	63.40	----	74.00	----	10.60	----	Peak
14 006.88	V	32.0	19.6	0.28	----	51.88	----	54.00	----	2.12	Average

Ch.227(7 085 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Peak result = Reading + c.f (Correction factor)
Average result = Reading + c.f (Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp gain
4. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (396) / (417) Pages

Worst Case Mode :	802.11ax_HE40_484T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 965 MHz
Channel :	3

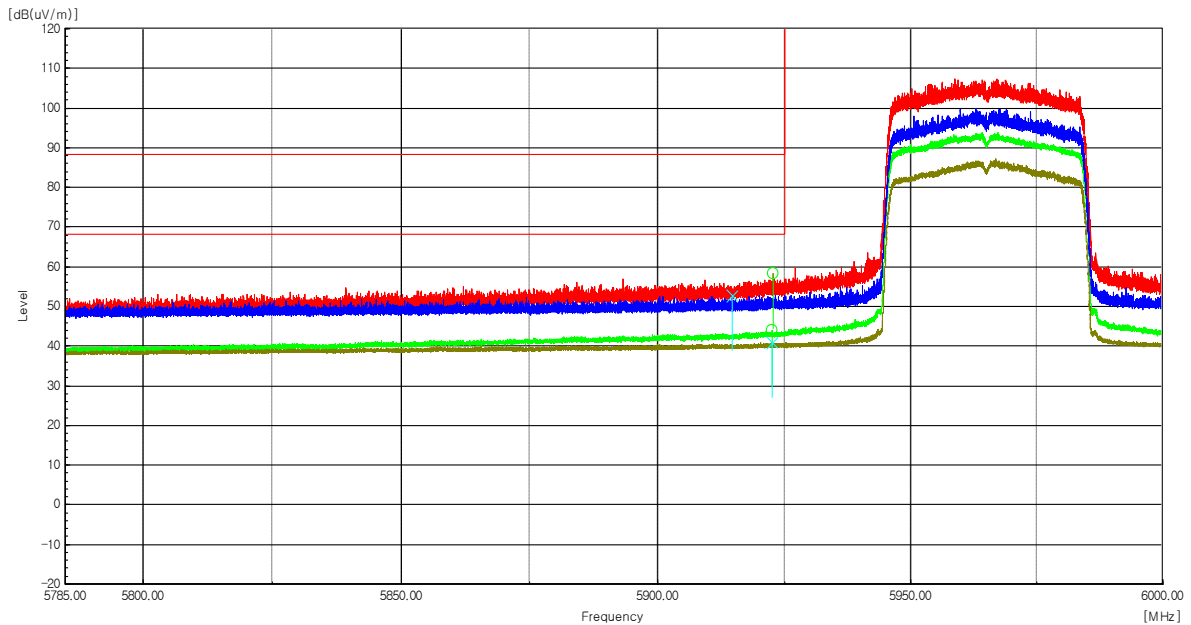

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 914.69	V	46.6	6.2	-----	52.80	-----	88.20	-----	35.40	-----	Peak
5 922.55	H	37.6	6.3	0.28	-----	44.18	-----	68.20	-----	24.02	Average
5 922.65	V	34.5	6.3	0.28	-----	41.08	-----	68.20	-----	27.12	Average
5 922.73	H	52.0	6.3	-----	58.30	-----	88.20	-----	29.90	-----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (397) / (417) Pages

Worst Case Mode :	802.11ax_HE40_484T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 085 MHz
Channel :	227

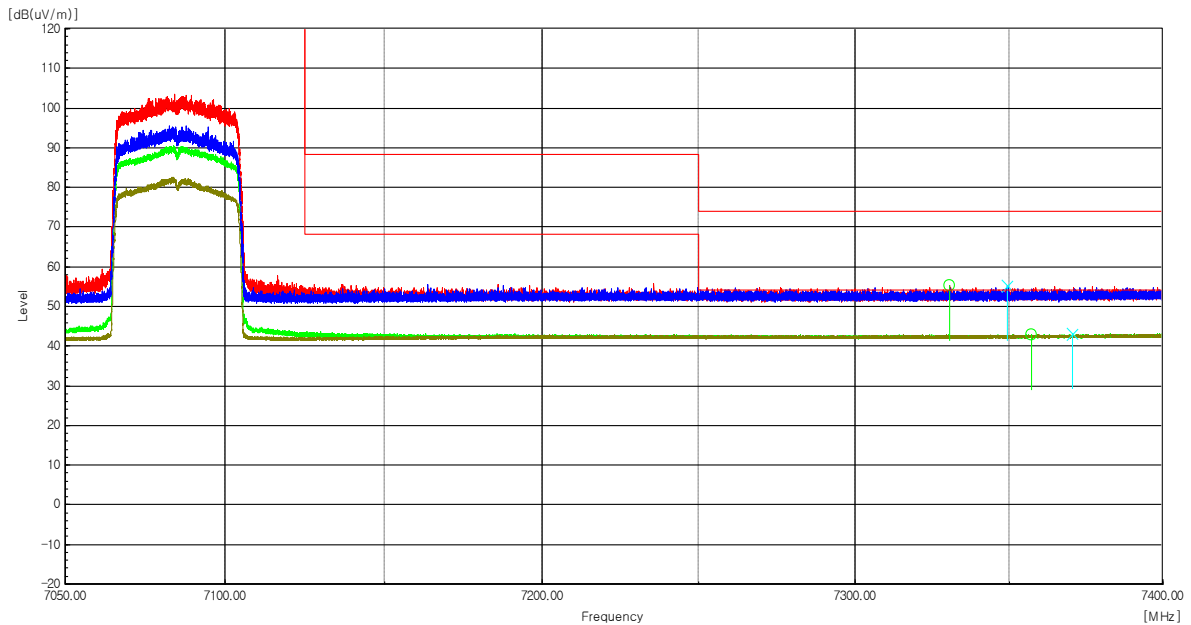

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
7 330.68	H	46.2	9.1	-----	55.30	-----	74.00	-----	18.70	-----	Peak
7 349.28	V	46.1	9.1	-----	55.20	-----	74.00	-----	18.80	-----	Peak
7 357.13	H	33.7	9.1	0.28	-----	43.08	-----	54.00	-----	10.92	Average
7 370.59	V	33.9	9.1	0.28	-----	43.28	-----	54.00	-----	10.72	Average

Radiated Restricted Band Edge Plot

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (398) / (417) Pages

Test Mode : Transmitter (802.11ax_HE80_26T)

The requirements are:

☒ Complies

Ch.7(5 985 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.39(6 145 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.87(6 385 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.103(6 465 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.119(6 545 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.135(6 625 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.151(6 705 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.167(6 785 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.183(6 865 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (399) / (417) Pages

Ch.199(6 945 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.215(7 025 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Peak result = Reading + c.f (Correction factor)
Average result = Reading + c.f (Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp gain
4. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (400) / (417) Pages

Worst Case Mode :	802.11ax_HE80_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 985 MHz
Channel :	7

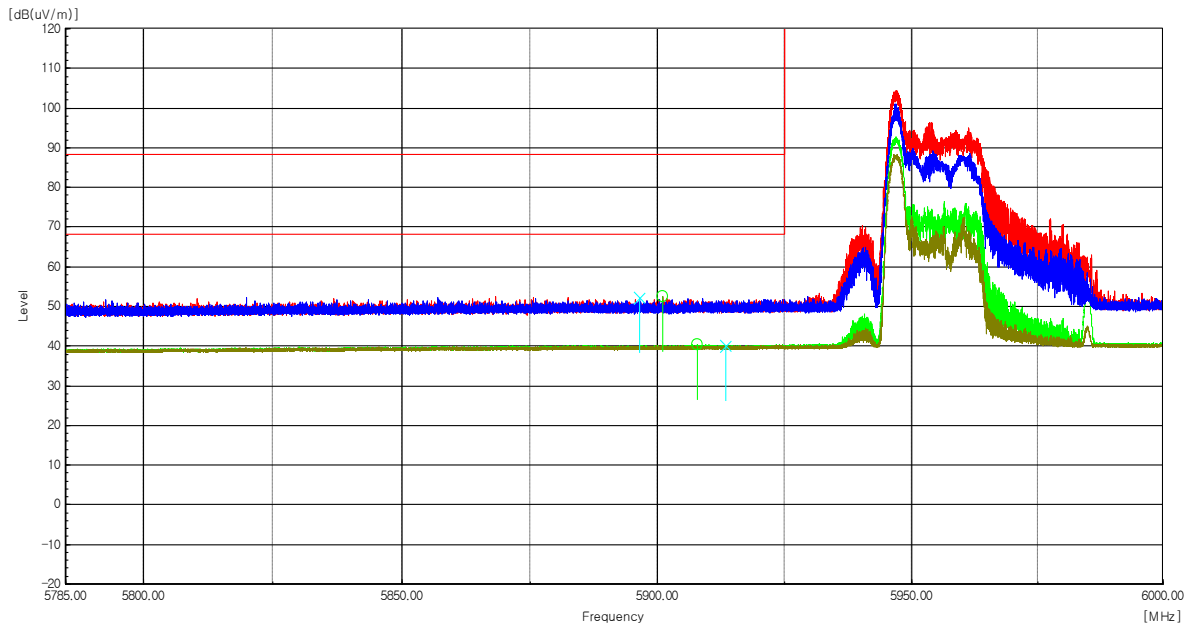

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 896.39	V	46.1	6.1	-----	52.20	-----	88.20	-----	36.00	-----	Peak
5 901.10	H	46.2	6.2	-----	52.40	-----	88.20	-----	35.80	-----	Peak
5 907.88	H	34.2	6.2	0.21	-----	40.61	-----	68.20	-----	27.59	Average
5 913.36	V	33.9	6.2	0.21	-----	40.31	-----	68.20	-----	27.89	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (401) / (417) Pages

Worst Case Mode :	802.11ax_HE80_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 025 MHz
Channel :	215

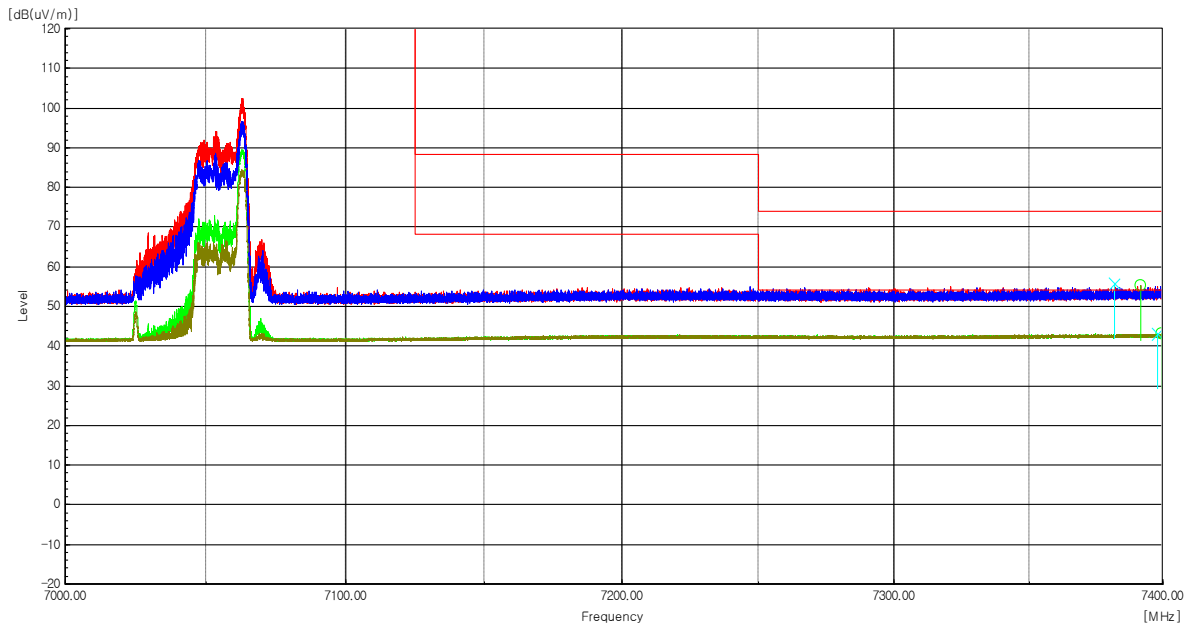

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
7 391.79	H	46.0	9.2	-----	55.20	-----	74.00	-----	18.80	-----	Peak
7 399.68	H	33.8	9.2	0.21	-----	43.21	-----	54.00	-----	10.79	Average
7 381.95	V	46.6	9.1	-----	55.70	-----	74.00	-----	18.30	-----	Peak
7 398.11	V	33.8	9.2	0.21	-----	43.21	-----	54.00	-----	10.79	Average

Radiated Restricted Band Edge Plot



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2026-00064
Page (402) / (417) Pages

Test Mode : Transmitter (802.11ax_HE80_52T)

The requirements are:

☒ Complies

Worst Case Mode :	802.11ax_HE80_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 985 MHz
Channel :	7

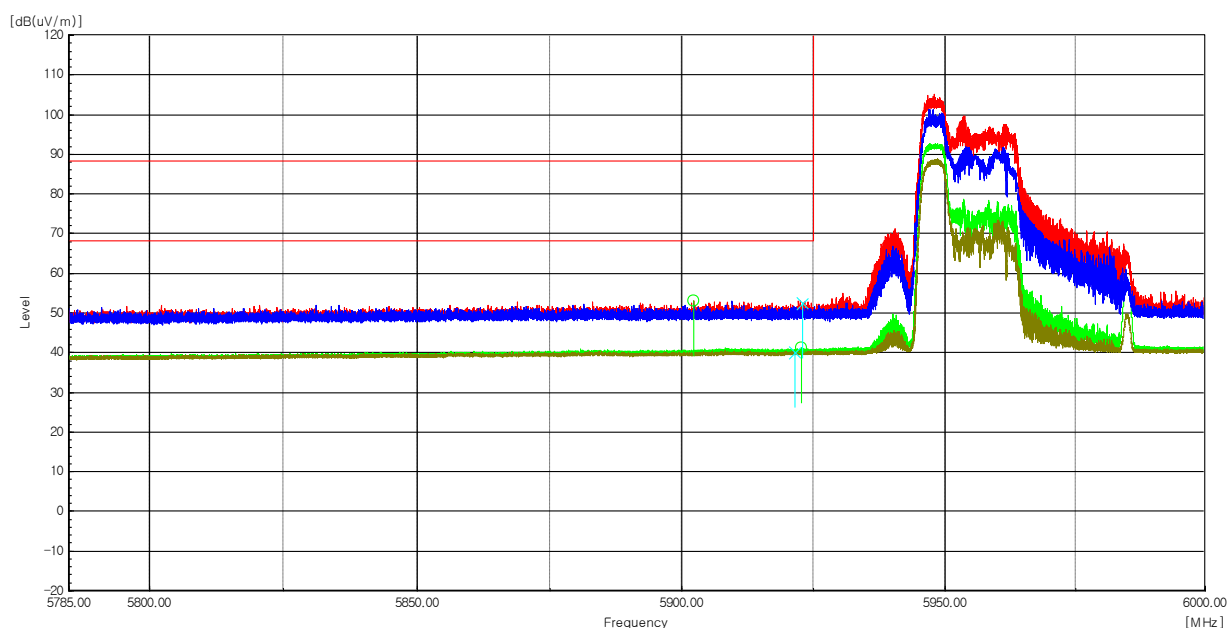

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 902.30	H	46.8	6.2	-----	53.00	-----	88.20	-----	35.20	-----	Peak
5 921.37	V	33.9	6.3	0.23	-----	40.43	-----	68.20	-----	27.77	Average
5 922.67	H	34.9	6.3	0.23	-----	41.43	-----	68.20	-----	26.77	Average
5 922.89	V	46.2	6.3	-----	52.50	-----	88.20	-----	35.70	-----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (403) / (417) Pages

Worst Case Mode :	802.11ax_HE80_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 025 MHz
Channel :	215

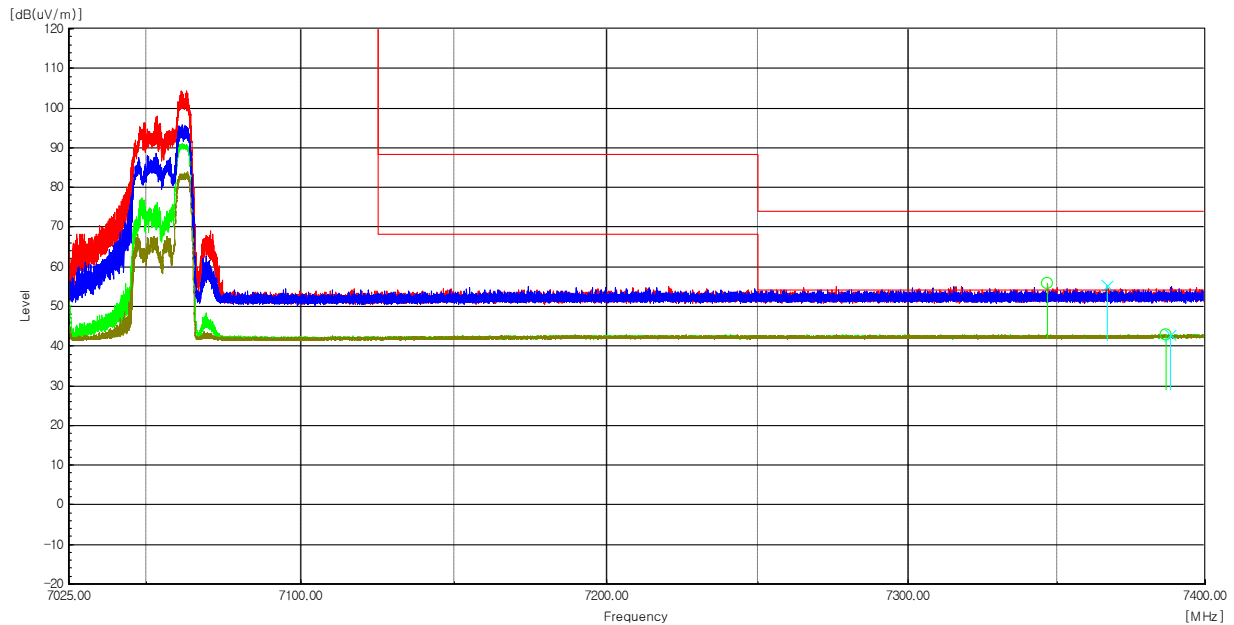

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
7 346.91	H	46.6	9.1	-----	55.70	-----	74.00	-----	18.30	-----	Peak
7 367.01	V	46.0	9.1	-----	55.10	-----	74.00	-----	18.90	-----	Peak
7 386.92	H	33.7	9.2	0.23	-----	43.13	-----	54.00	-----	10.87	Average
7 388.21	V	33.8	9.2	0.23	-----	43.23	-----	54.00	-----	10.77	Average

Radiated Restricted Band Edge Plot



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2026-00064
Page (404) / (417) Pages

Test Mode : Transmitter (802.11ax_HE80_106T)

The requirements are:

☒ Complies

Worst Case Mode :	802.11ax_HE80_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 985 MHz
Channel :	7

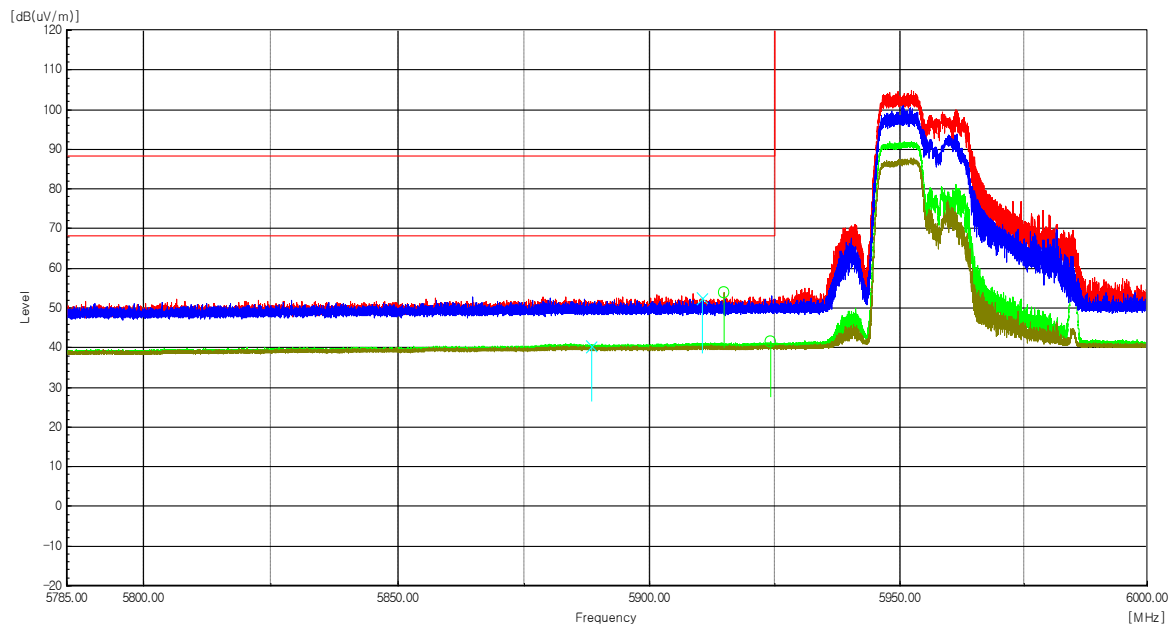

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 888.35	V	34.1	6.1	0.24	----	40.44	----	68.20	----	27.76	Average
5 910.56	V	46.3	6.2	----	52.50	----	88.20	----	35.70	----	Peak
5 914.75	H	47.6	6.2	----	53.80	----	88.20	----	34.40	----	Peak
5 924.21	H	35.0	6.3	0.24	----	41.54	----	68.20	----	26.66	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (405) / (417) Pages

Worst Case Mode :	802.11ax_HE80_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 025 MHz
Channel :	215

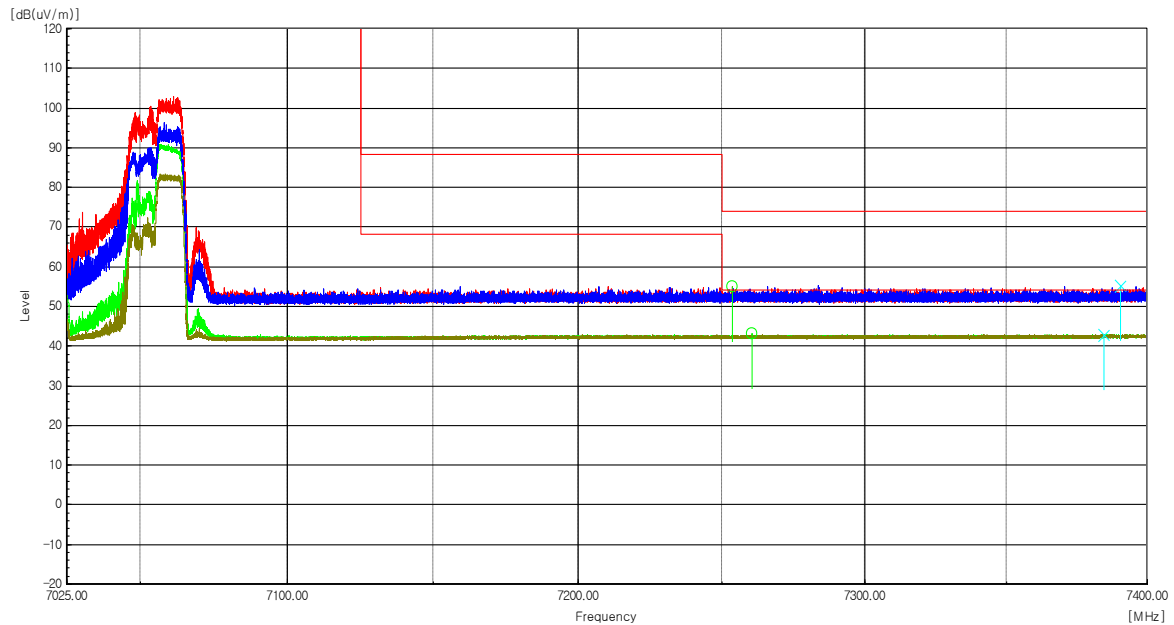

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
7 253.67	H	45.8	9.1	-----	54.90	-----	74.00	-----	19.10	-----	Peak
7 260.54	H	33.9	9.1	0.24	-----	43.24	-----	54.00	-----	10.76	Average
7 384.48	V	33.7	9.2	0.24	-----	43.14	-----	54.00	-----	10.86	Average
7 390.38	V	46.0	9.2	-----	55.20	-----	74.00	-----	18.80	-----	Peak

Radiated Restricted Band Edge Plot



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2026-00064
Page (406) / (417) Pages

Test Mode : Transmitter (802.11ax_HE80_242T)

The requirements are:

☒ Complies

Worst Case Mode :	802.11ax_HE80_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 985 MHz
Channel :	7

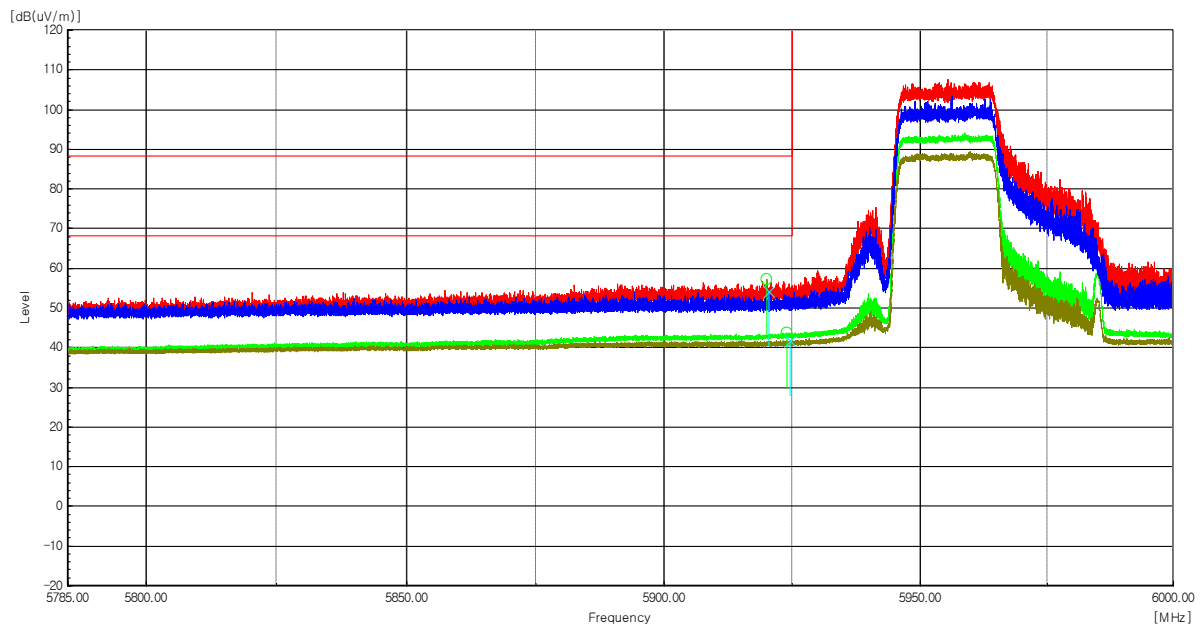

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 920.03	H	51.0	6.3	----	57.30	----	88.20	----	30.90	----	Peak
5 920.36	V	47.9	6.3	----	54.20	----	88.20	----	34.00	----	Peak
5 923.99	H	37.3	6.3	0.28	----	43.88	----	68.20	----	24.32	Average
5 924.54	V	35.4	6.3	0.28	----	41.98	----	68.20	----	26.22	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00064
Page (407) / (417) Pages

Worst Case Mode :	802.11ax_HE80_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 025 MHz
Channel :	215

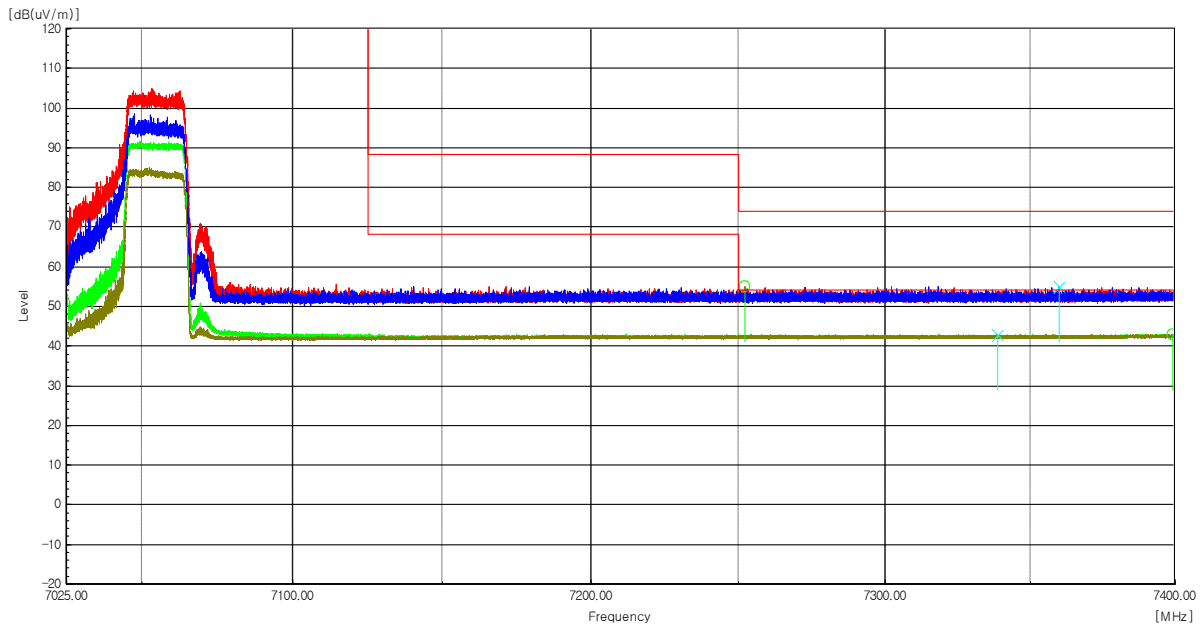

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
7 252.29	H	46.0	9.1	-----	55.10	-----	74.00	-----	18.90	-----	Peak
7 338.86	V	33.8	9.1	0.28	-----	43.18	-----	54.00	-----	10.82	Average
7 359.81	V	45.8	9.1	-----	54.90	-----	74.00	-----	19.10	-----	Peak
7 399.40	H	33.7	9.2	0.28	-----	43.18	-----	54.00	-----	10.82	Average

Radiated Restricted Band Edge Plot



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2026-00064
Page (408) / (417) Pages

Test Mode : Transmitter (802.11ax_HE80_484T)

The requirements are:

☒ Complies

Worst Case Mode :	802.11ax_HE80_484T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 985 MHz
Channel :	7

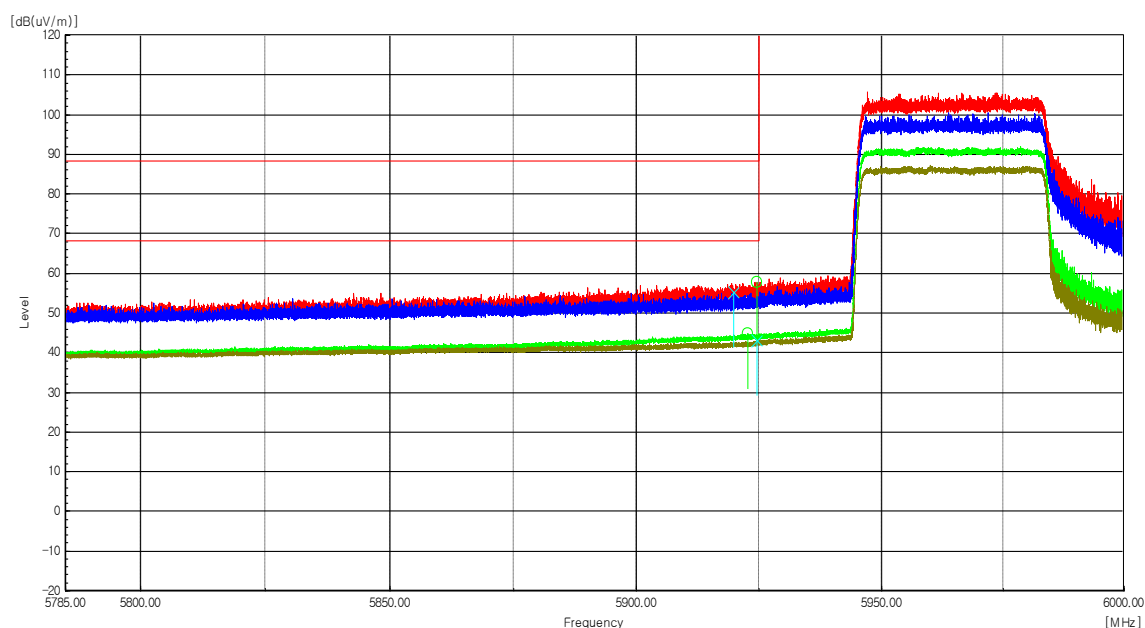

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 919.88	V	48.8	6.3	-----	55.10	-----	88.20	-----	33.10	-----	Peak
5 922.62	H	38.5	6.3	0.28	-----	45.08	-----	68.20	-----	23.12	Average
5 924.57	V	36.7	6.3	0.28	-----	43.28	-----	68.20	-----	24.92	Average
5 924.66	H	51.6	6.3	-----	57.90	-----	88.20	-----	30.30	-----	Peak

Radiated Restricted Band Edge Plot