Mode	6	
	Band Edge	
	2400-2483.5_BLE CS ASK_CH76_2478MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	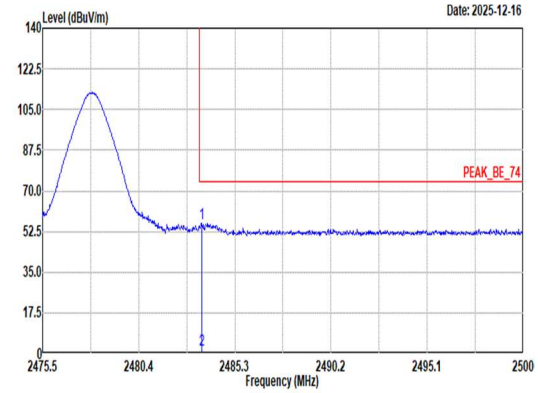 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2483.61 55.81 74.00 -18.19 46.33 27.67 8.75 36.86 9.92 400 284 Peak 2 2483.61 1.83 54.00 -52.17 -- -- -- -- -- -- -- AVERAGE	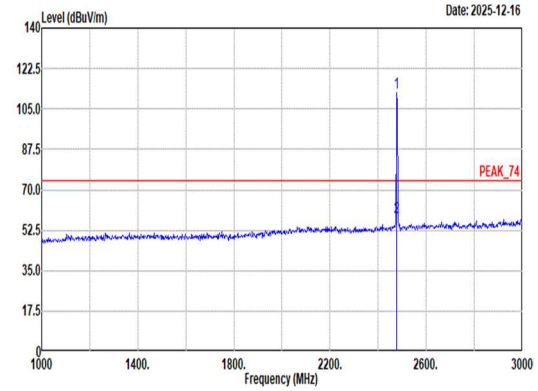 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2478.00 112.24 ------ ------ 102.86 27.58 8.74 36.86 9.92 400 284 Peak 2 2478.00 58.26 ------ ------ -- -- -- -- -- -- -- Average

Mode	6	
	Harmonic	
	2400-2483.5_BLE CS ASK_CH76_2478MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak Avg	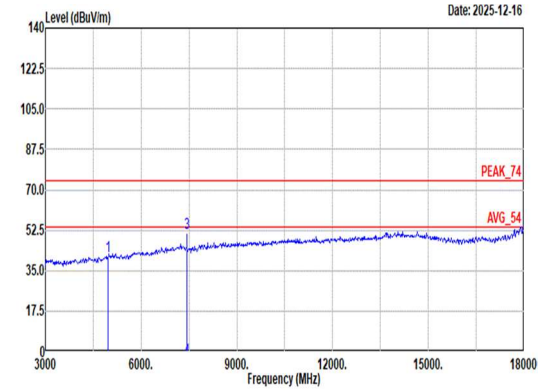 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 HORIZONTAL 1 4956.00 40.95 74.00 -33.05 53.15 33.02 12.44 58.18 0.52 -- -- Peak 2 4956.00 -13.03 54.00 -67.03 -- -- -- -- -- -- -- Average 3 7434.00 51.04 74.00 -22.96 58.15 36.33 15.39 59.16 0.33 100 115 Peak 4 7434.00 -2.94 54.00 -56.94 -- -- -- -- -- -- -- Average	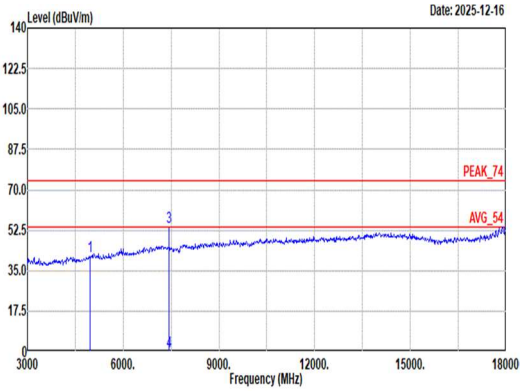 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 VERTICAL 1 4956.00 41.19 74.00 -32.81 53.39 33.02 12.44 58.18 0.52 -- -- Peak 2 4956.00 -12.80 54.00 -66.80 -- -- -- -- -- -- -- Average 3 7434.00 53.74 74.00 -20.26 60.85 36.33 15.39 59.16 0.33 100 187 Peak 4 7434.00 -0.24 54.00 -54.24 -- -- -- -- -- -- -- Average

Mode	6	
	Harmonic	
	2400-2483.5_BLE CS ASK_CH76_2478MHz	
ANT	3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	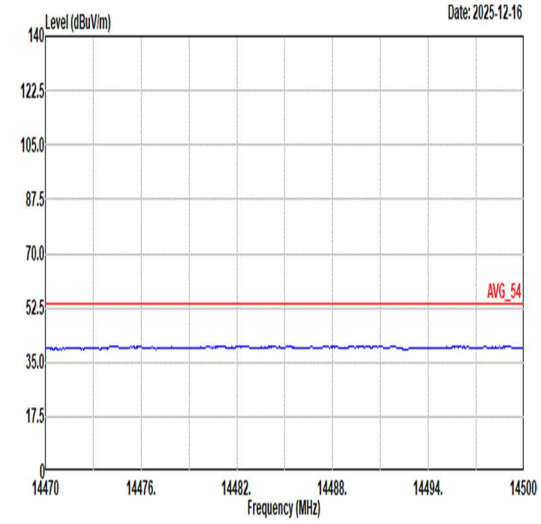 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	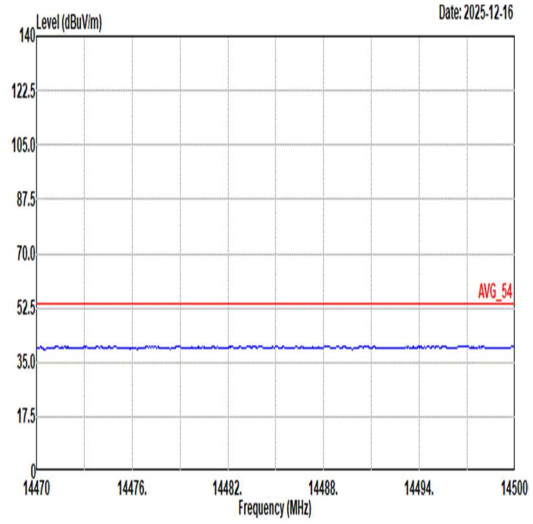 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	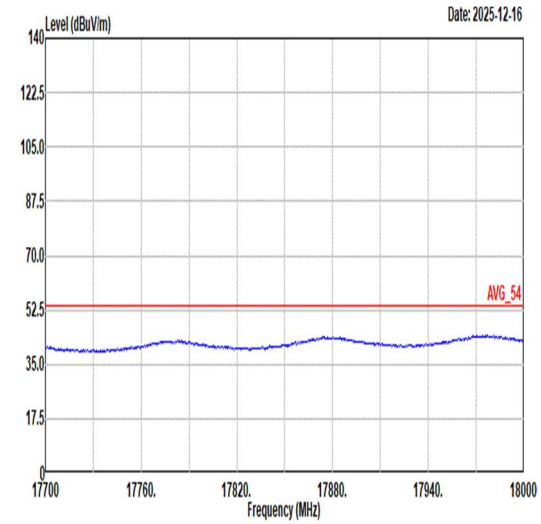 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	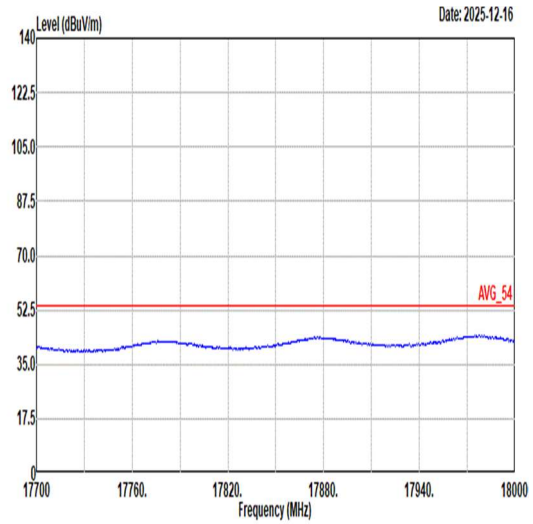 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL

Mode	7	
	LF	
	2400-2483.5_BLE CS ASK_CH38_2440MHz	
ANT	3	
Pol.	Horizontal	Vertical
QP/ Peak	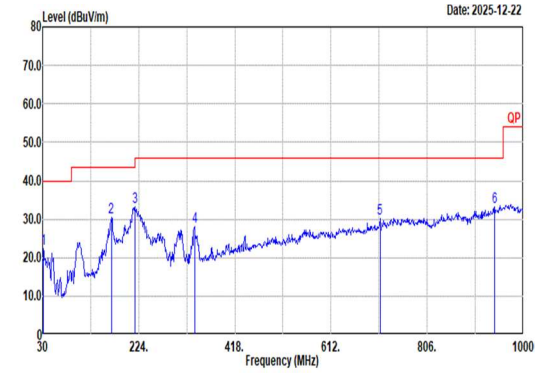	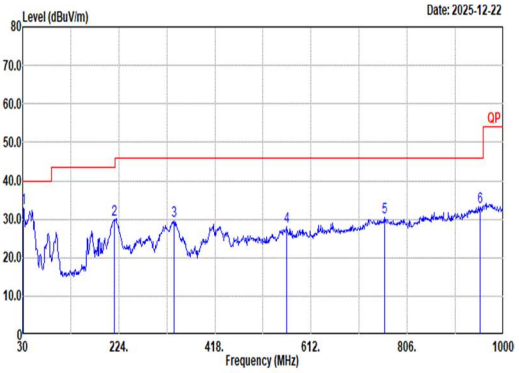

Site : 03CH15-HY
Condition: QP 3m Bilog_41912 & 05_250301 HORIZONTAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	31.94	22.40	40.00	-17.60	30.28	23.55	0.91	32.43	0.09	--	--	Peak
2	168.71	30.53	43.50	-12.97	44.49	15.89	2.30	32.38	0.23	--	--	Peak
3	217.21	33.06	46.00	-12.94	47.64	15.09	2.58	32.34	0.09	--	--	Peak
4	336.52	28.15	46.00	-17.85	37.01	20.04	3.21	32.28	0.17	--	--	Peak
5	710.94	30.06	46.00	-15.94	30.61	26.91	4.68	32.29	0.15	--	--	Peak
6	942.77	33.31	46.00	-12.69	28.17	30.56	5.36	31.11	0.33	--	--	Peak

Site : 03CH15-HY
Condition: QP 3m Bilog_41912 & 05_250301 VERTICAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	31.94	33.05	40.00	-6.95	40.93	23.55	0.91	32.43	0.09	--	--	Peak
2	214.30	30.03	43.50	-13.47	44.63	15.07	2.57	32.33	0.09	--	--	Peak
3	335.55	29.60	46.00	-16.40	38.50	20.00	3.21	32.28	0.17	--	--	Peak
4	563.50	27.95	46.00	-18.05	29.49	26.57	4.14	32.36	0.11	--	--	Peak
5	760.41	30.64	46.00	-15.36	29.39	28.45	4.83	32.21	0.18	--	--	Peak
6	953.44	33.36	46.00	-12.64	27.53	31.09	5.39	31.01	0.36	--	--	Peak

Mode	8	
	SHF	
	2400-2483.5_BLE CS ASK_CH38_2440MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak	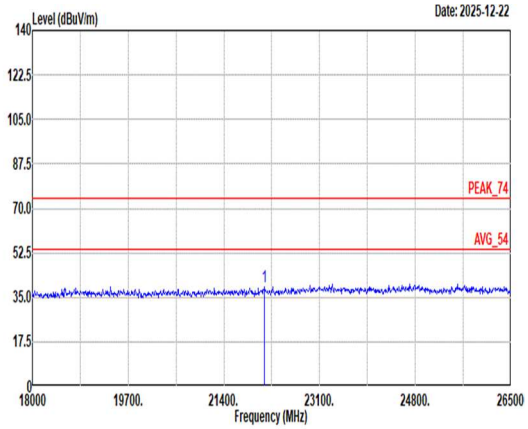 Site : 03CH15-HY Condition: PEAK_74 1m BBHA9170_1225_250702 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 22122.50 39.16 74.00 -34.84 58.85 38.35 6.30 54.80 -9.54 -- -- Peak	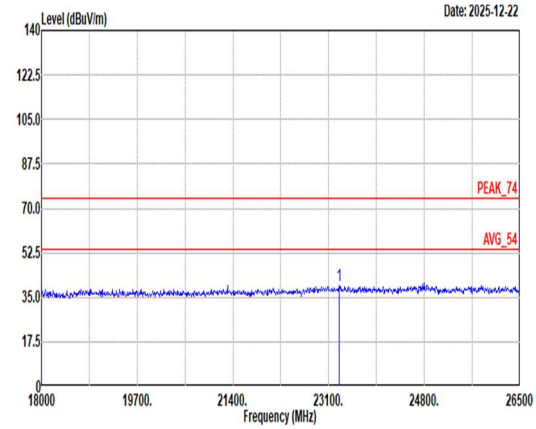 Site : 03CH15-HY Condition: PEAK_74 1m BBHA9170_1225_250702 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 23287.00 39.83 74.00 -34.17 58.27 39.10 6.37 54.37 -9.54 -- -- Peak

Mode	9	
	Band Edge	
	2400-2483.5_BLE CS ASK_CH02_2404MHz	
ANT	4	
Pol.	Horizontal	Fundamental
Peak	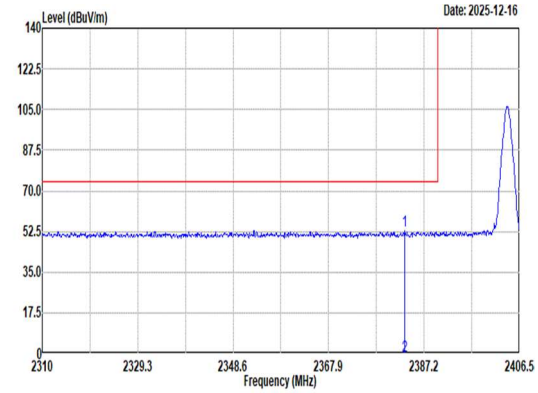 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2383.34 52.93 74.00 -21.07 44.09 27.23 8.57 36.88 9.92 149 93 Peak 2 2383.34 -1.05 54.00 -55.05 -- -- -- -- -- -- -- AVERAGE	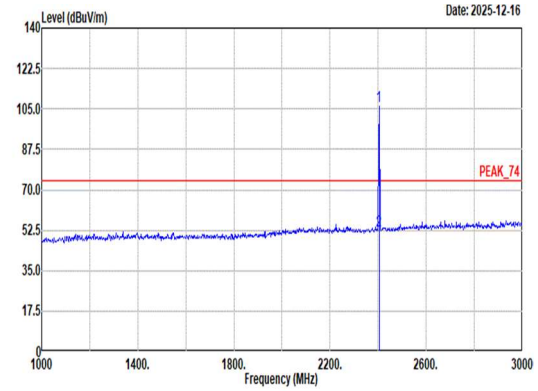 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2404.00 106.14 ------ ------ 97.09 27.40 8.61 36.88 9.92 149 93 Peak 2 2404.00 52.16 ------ ------ -- -- -- -- -- -- -- Average

Mode	9	
	Band Edge	
	2400-2483.5_BLE CS ASK_CH02_2404MHz	
ANT	4	
Pol.	Vertical	Fundamental
Peak	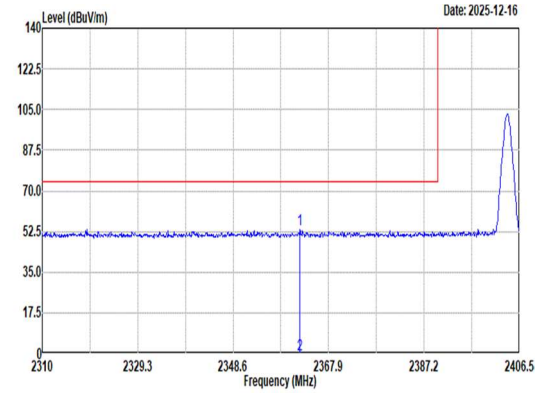 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2362.11 53.38 74.00 -20.62 44.51 27.30 8.53 36.88 9.92 375 300 Peak 2 2362.11 -0.60 54.00 -54.60 -- -- -- -- -- -- -- AVERAGE	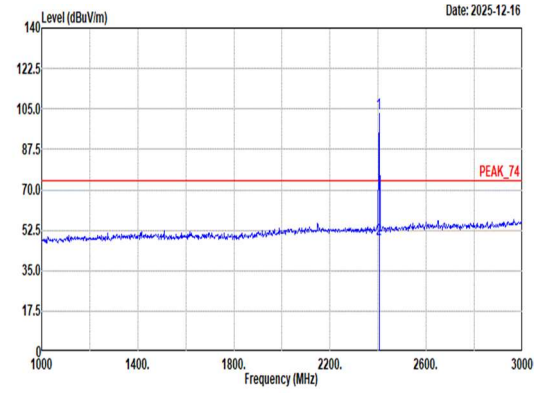 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2404.00 102.77 ------ ------ 93.72 27.40 8.61 36.88 9.92 375 300 Peak 2 2404.00 48.79 ------ ------ -- -- -- -- -- -- -- Average

Mode	9	
	Harmonic	
	2400-2483.5_BLE CS ASK_CH02_2404MHz	
ANT	4	
Pol.	Horizontal	Vertical
Peak Avg	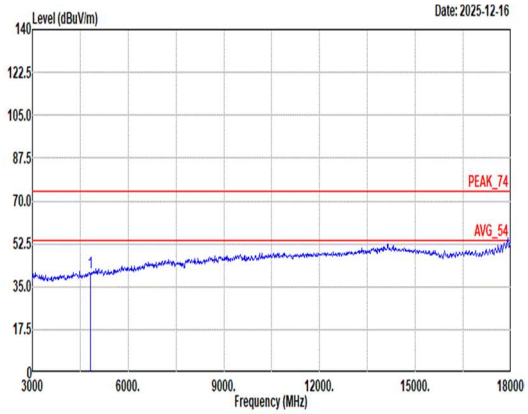 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4808.00 40.75 74.00 -33.25 53.77 32.35 12.29 58.20 0.54 -- -- Peak 2 4808.00 -13.23 54.00 -67.23 -0.21 32.35 12.29 58.20 0.54 -- -- Average	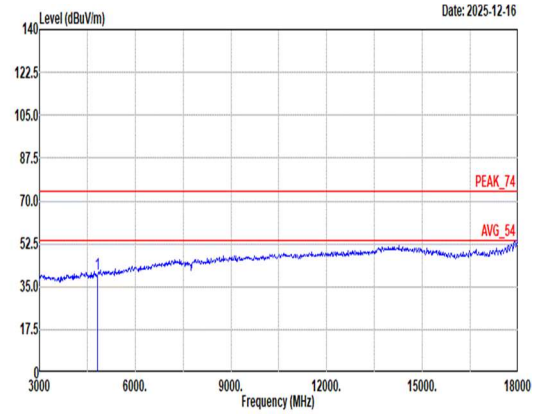 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4808.00 40.10 74.00 -33.90 53.12 32.35 12.29 58.20 0.54 -- -- Peak 2 4808.00 -13.88 54.00 -67.88 -0.86 32.35 12.29 58.20 0.54 -- -- Average

Mode	9	
	Harmonic	
	2400-2483.5_BLE CS ASK_CH02_2404MHz	
ANT	4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	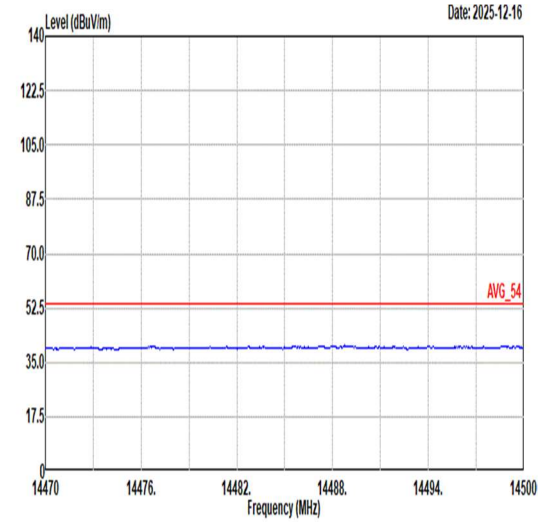 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	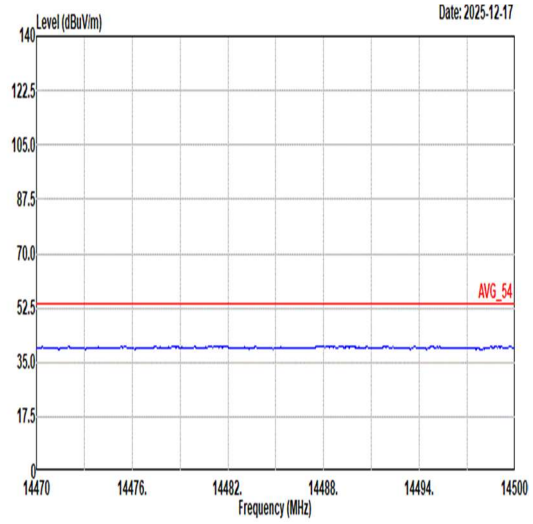 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	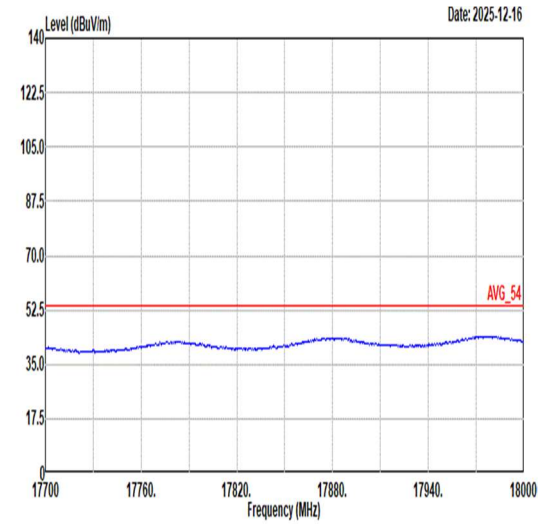 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	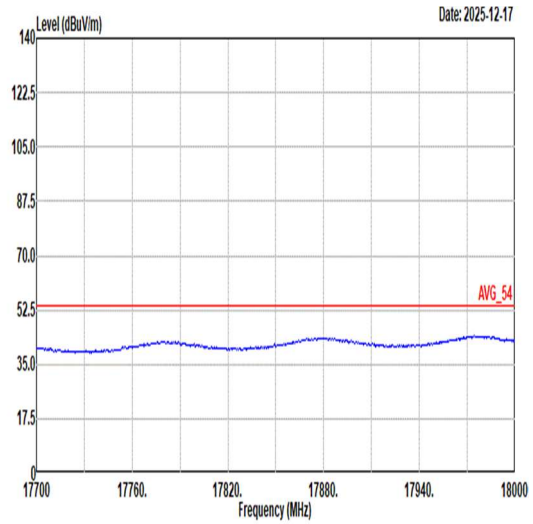 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL

Mode	10	
	Band Edge - L	
	2400-2483.5_BLE CS ASK_CH38_2440MHz	
ANT	4	
Pol.	Horizontal	Fundamental
Peak	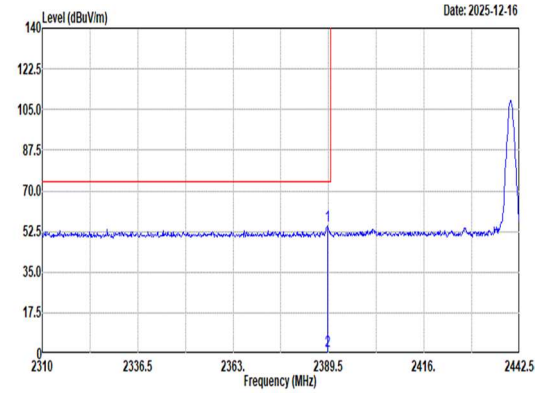 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2389.24 54.96 74.00 -19.04 46.05 27.29 8.58 36.88 9.92 100 63 Peak 2 2389.24 0.98 54.00 -53.02 -- -- -- -- -- -- -- AVERAGE	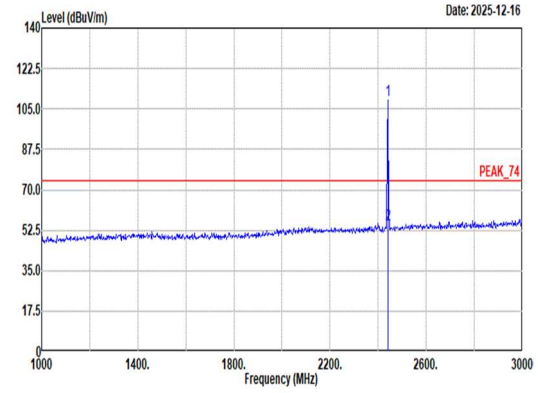 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2440.00 108.95 ------ ------ 99.73 27.50 8.67 36.87 9.92 100 63 Peak 2 2440.00 54.97 ------ ------ -- -- -- -- -- -- -- Average

Mode	10	
	Band Edge - R	
	2400-2483.5_BLE CS ASK_CH38_2440MHz	
ANT	4	
Pol.	Horizontal	Fundamental
Peak	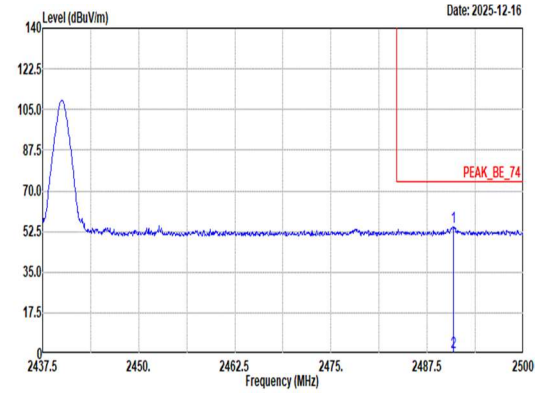 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2490.88 54.54 74.00 -19.46 44.92 27.80 8.76 36.86 9.92 100 63 Peak 2 2490.88 0.56 54.00 -53.44 -- -- -- -- -- -- -- AVERAGE	Blank

Mode	10	
	Band Edge - L	
	2400-2483.5_BLE CS ASK_CH38_2440MHz	
ANT	4	
Pol.	Vertical	Fundamental
Peak	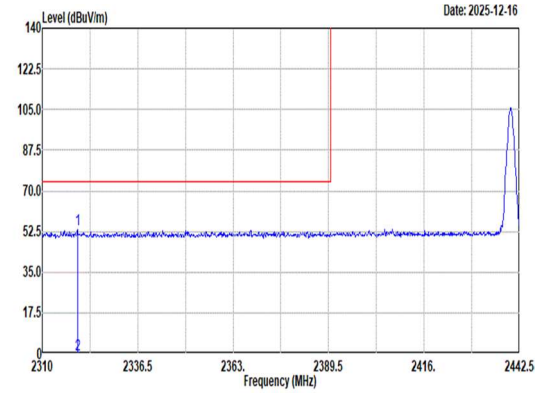 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2319.81 53.32 74.00 -20.68 44.65 27.20 8.44 36.89 9.92 365 299 Peak 2 2319.81 -0.66 54.00 -54.66 -- -- -- -- -- -- -- AVERAGE	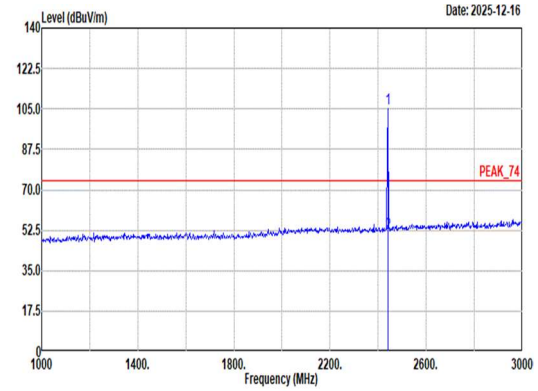 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2440.00 105.39 ------ ------ 96.17 27.50 8.67 36.87 9.92 365 299 Peak 2 2440.00 51.41 ------ ------ -- -- -- -- -- -- -- Average

Mode	10	
	Band Edge - R	
	2400-2483.5_BLE CS ASK_CH38_2440MHz	
ANT	4	
Pol.	Vertical	Fundamental
Peak	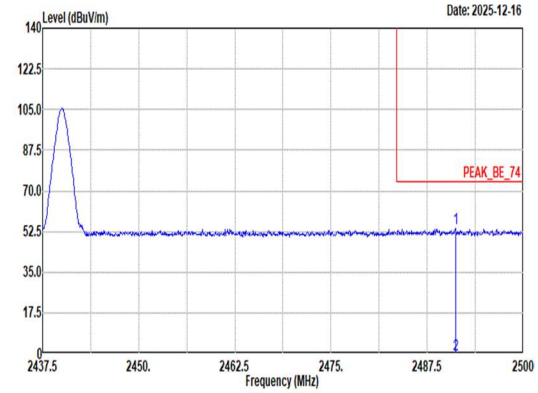 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2491.19 53.65 74.00 -20.35 44.03 27.80 8.76 36.86 9.92 365 299 Peak 2 2491.19 -0.33 54.00 -54.33 -- -- -- -- -- -- -- AVERAGE	Blank

Mode	10	
	Harmonic	
	2400-2483.5_BLE CS ASK_CH38_2440MHz	
ANT	4	
Pol.	Horizontal	Vertical
Peak Avg	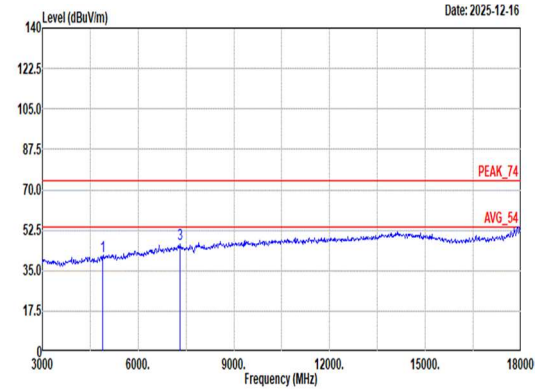 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 HORIZONTAL 1 4880.00 41.04 74.00 -32.96 53.62 32.72 12.36 58.19 0.53 -- -- Peak 2 4880.00 -12.95 54.00 -66.95 -0.37 32.72 12.36 58.19 0.53 -- -- Average 3 7320.00 46.39 74.00 -27.61 53.01 36.82 15.27 59.04 0.33 -- -- Peak 4 7320.00 -7.59 54.00 -61.59 -0.97 36.82 15.27 59.04 0.33 -- -- Average	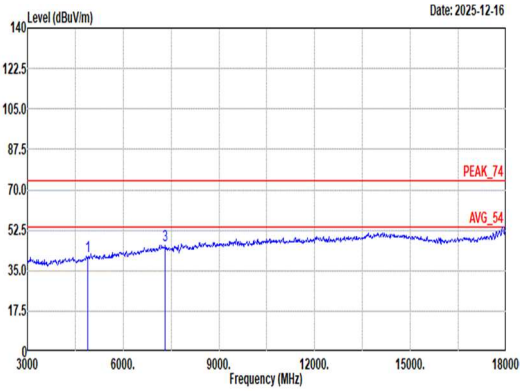 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 VERTICAL 1 4880.00 41.34 74.00 -32.66 53.92 32.72 12.36 58.19 0.53 -- -- Peak 2 4880.00 -12.64 54.00 -66.64 -0.06 32.72 12.36 58.19 0.53 -- -- Average 3 7320.00 45.85 74.00 -28.15 52.47 36.82 15.27 59.04 0.33 -- -- Peak 4 7320.00 -8.13 54.00 -62.13 -1.51 36.82 15.27 59.04 0.33 -- -- Average

Mode	10	
	Harmonic	
	2400-2483.5_BLE CS ASK_CH38_2440MHz	
ANT	4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	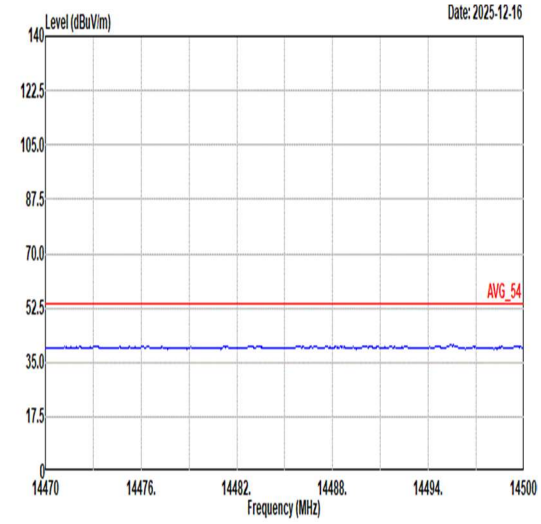 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	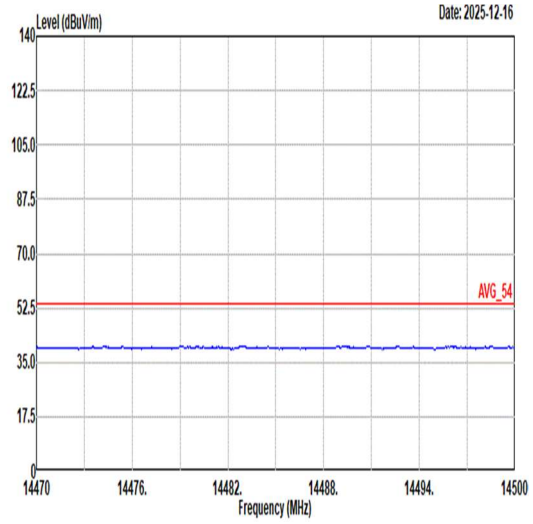 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	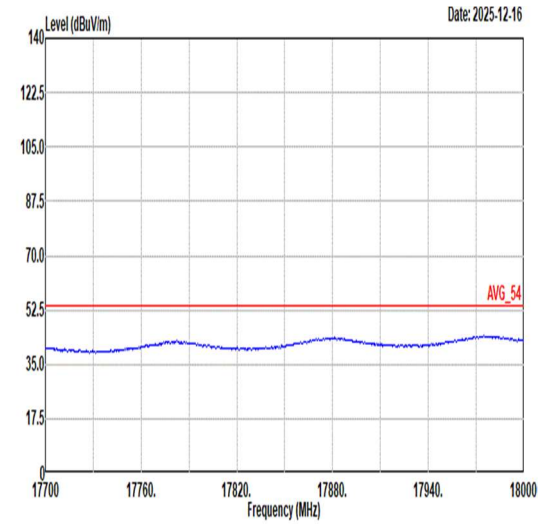 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	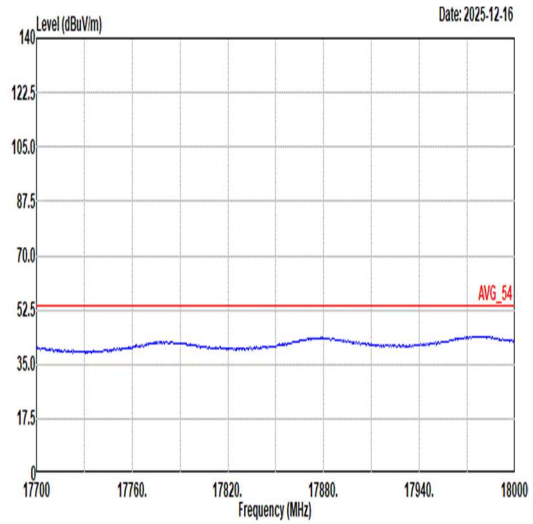 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL

Mode	11	
	Band Edge	
	2400-2483.5_BLE CS ASK_CH76_2478MHz	
ANT	4	
Pol.	Horizontal	Fundamental
Peak	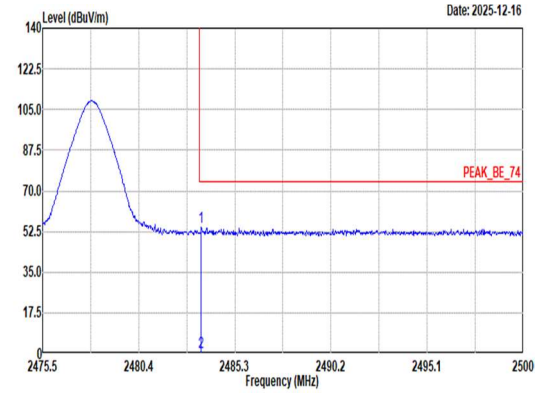 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2483.59 54.46 74.00 -19.54 44.98 27.67 8.75 36.86 9.92 100 51 Peak 2 2483.59 0.48 54.00 -53.52 -- -- -- -- -- -- -- AVERAGE	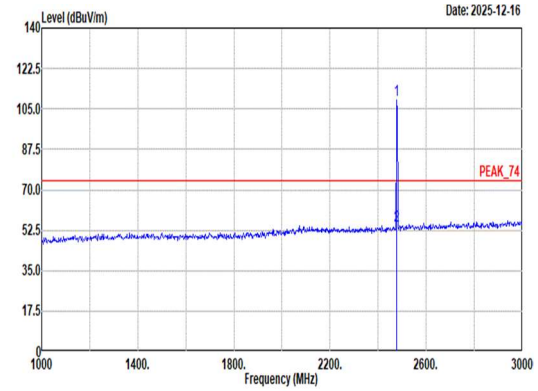 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2478.00 108.61 ------ ------ 99.23 27.58 8.74 36.86 9.92 100 51 Peak 2 2478.00 54.63 ------ ------ -- -- -- -- -- -- -- Average

Mode	11	
	Band Edge	
	2400-2483.5_BLE CS ASK_CH76_2478MHz	
ANT	4	
Pol.	Vertical	Fundamental
Peak	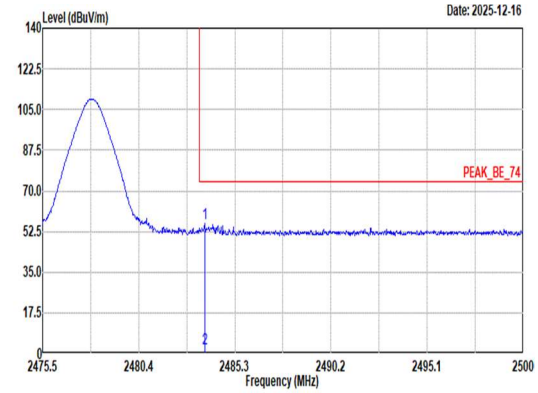 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2483.76 55.87 74.00 -18.13 46.38 27.68 8.75 36.86 9.92 400 303 Peak 2 2483.76 1.89 54.00 -52.11 -- -- -- -- -- -- -- AVERAGE	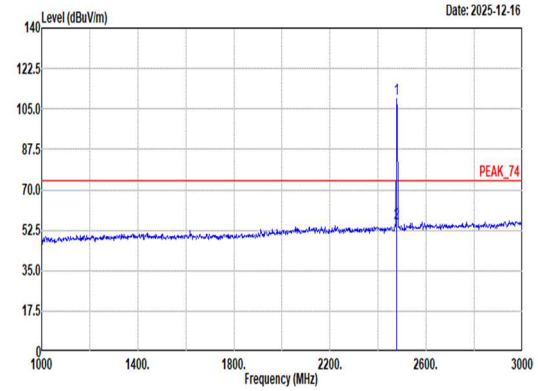 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2478.00 109.48 ------ ------ 100.10 27.58 8.74 36.86 9.92 400 303 Peak 2 2478.00 55.50 ------ ------ -- -- -- -- -- -- -- Average

Mode	11	
	Harmonic	
	2400-2483.5_BLE CS ASK_CH76_2478MHz	
ANT	4	
Pol.	Horizontal	Vertical
Peak Avg	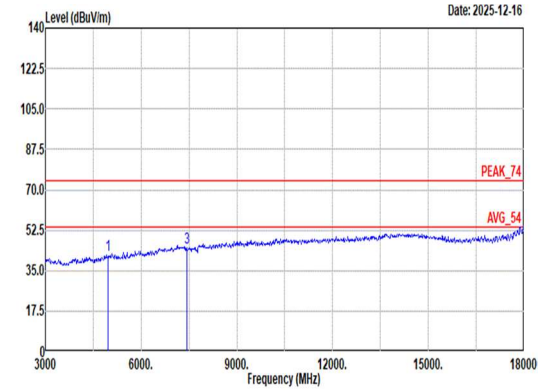 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 HORIZONTAL 1 4956.00 41.60 74.00 -32.40 53.80 33.02 12.44 58.18 0.52 -- -- Peak 2 4956.00 -12.39 54.00 -66.39 -0.19 33.02 12.44 58.18 0.52 -- -- Average 3 7434.00 44.89 74.00 -29.11 52.00 36.33 15.39 59.16 0.33 -- -- Peak 4 7434.00 -9.09 54.00 -63.09 -1.98 36.33 15.39 59.16 0.33 -- -- Average	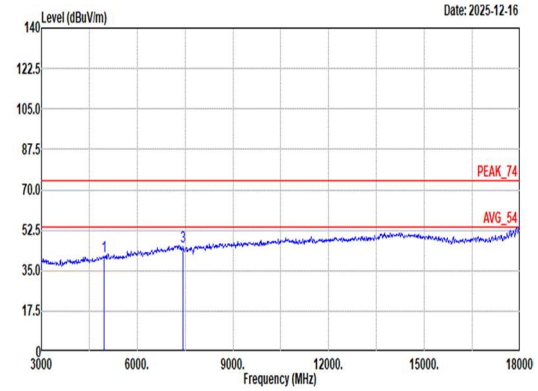 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 VERTICAL 1 4956.00 41.23 74.00 -32.77 53.43 33.02 12.44 58.18 0.52 -- -- Peak 2 4956.00 -12.75 54.00 -66.75 -0.55 33.02 12.44 58.18 0.52 -- -- Average 3 7434.00 45.59 74.00 -28.41 52.70 36.33 15.39 59.16 0.33 -- -- Peak 4 7434.00 -8.39 54.00 -62.39 -1.28 36.33 15.39 59.16 0.33 -- -- Average

Mode	11	
	Harmonic	
	2400-2483.5_BLE CS ASK_CH76_2478MHz	
ANT	4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	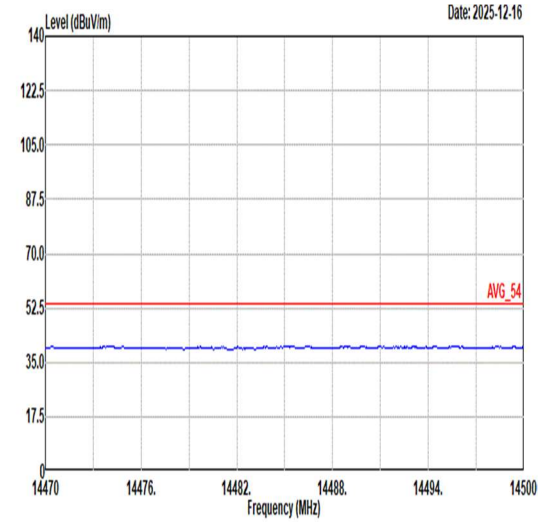 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	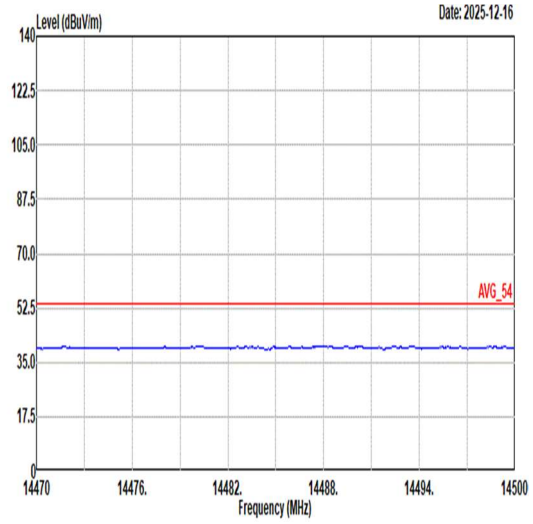 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	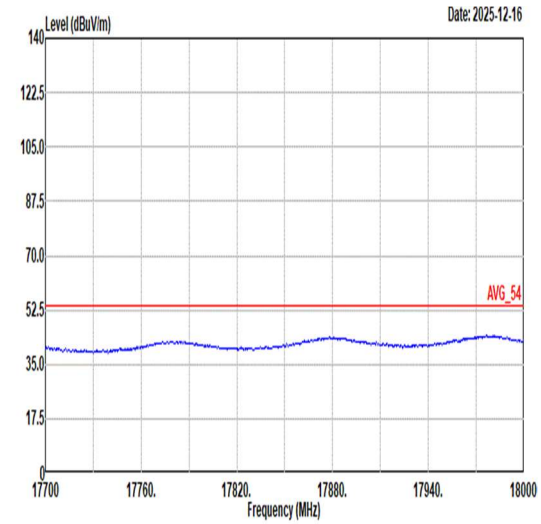 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	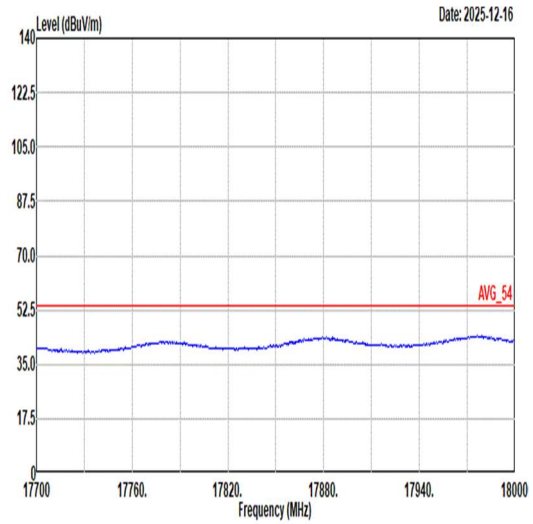 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL

Mode	12	
	Band Edge	
	2400-2483.5_BLE CS ASK_CH02_2404MHz	
ANT	4	
Pol.	Horizontal	Fundamental
Peak	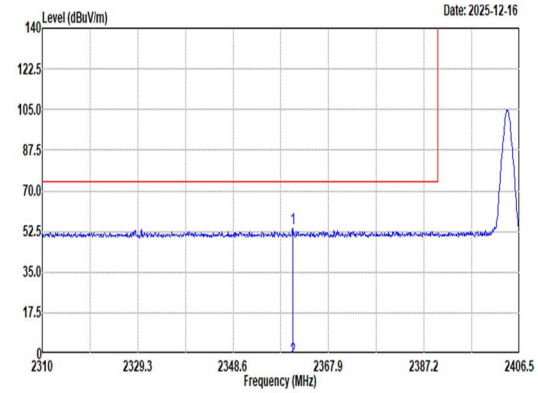 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2360.66 54.06 74.00 -19.94 45.21 27.30 8.52 36.89 9.92 200 115 Peak 2 2360.66 -1.86 54.00 -55.86 -- -- -- -- -- -- -- AVERAGE	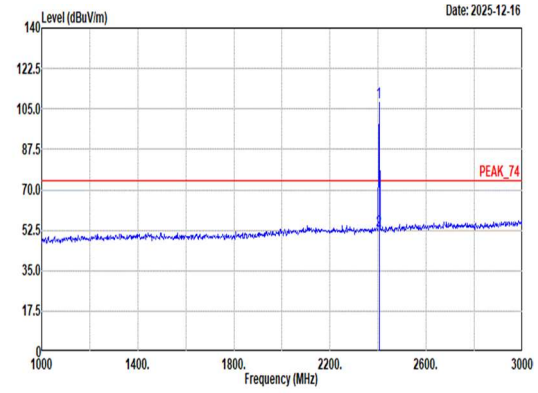 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2404.00 107.97 ------ ------ 98.92 27.40 8.61 36.88 9.92 200 115 Peak 2 2404.00 52.05 ------ ------ -- -- -- -- -- -- -- Average

Mode	12	
	Band Edge	
	2400-2483.5_BLE CS ASK_CH02_2404MHz	
ANT	4	
Pol.	Vertical	Fundamental
Peak	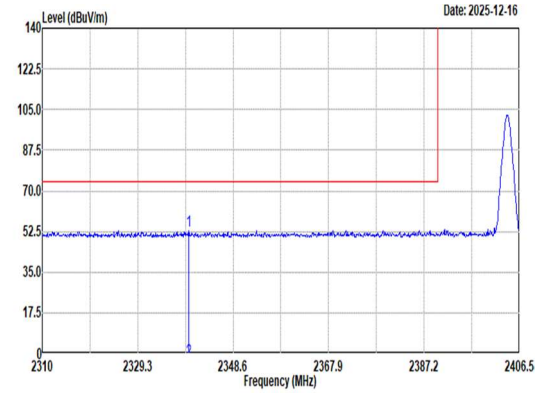 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2339.63 53.05 74.00 -20.95 44.44 27.10 8.48 36.89 9.92 384 299 Peak 2 2339.63 -2.87 54.00 -56.87 -- -- -- -- -- -- -- AVERAGE	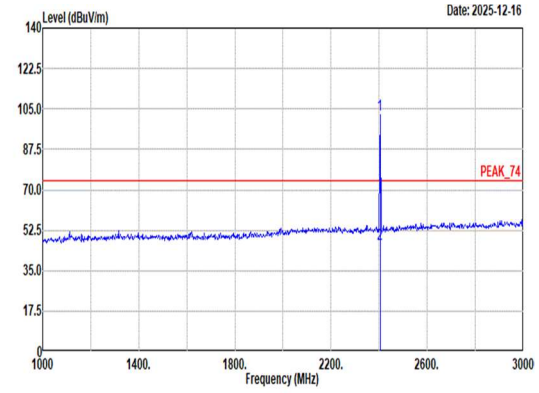 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2404.00 102.59 ------ ------ 93.54 27.40 8.61 36.88 9.92 384 299 Peak 2 2404.00 46.67 ------ ------ -- -- -- -- -- -- -- Average

Mode	12	
	Harmonic	
	2400-2483.5_BLE CS ASK_CH02_2404MHz	
ANT	4	
Pol.	Horizontal	Vertical
Peak Avg	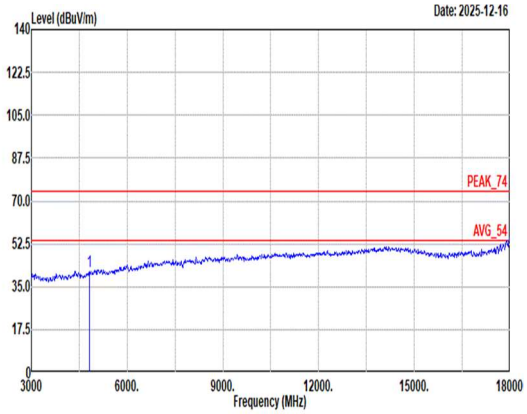 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4808.00 41.19 74.00 -32.81 54.21 32.35 12.29 58.20 0.54 -- -- Peak 2 4808.00 -14.70 54.00 -68.70 -1.68 32.35 12.29 58.20 0.54 -- -- Average	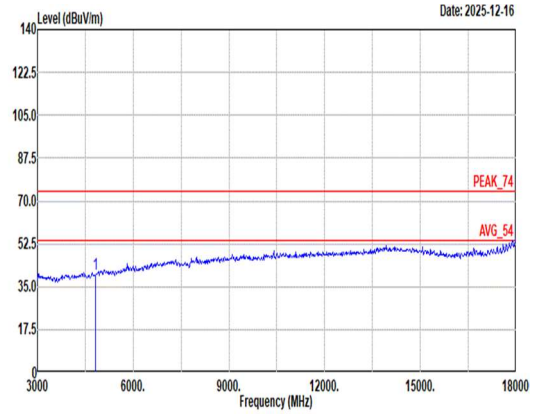 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4808.00 40.30 74.00 -33.70 53.32 32.35 12.29 58.20 0.54 -- -- Peak 2 4808.00 -15.62 54.00 -69.62 -2.60 32.35 12.29 58.20 0.54 -- -- Average

Mode	12	
	Harmonic	
	2400-2483.5_BLE CS ASK_CH02_2404MHz	
ANT	4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	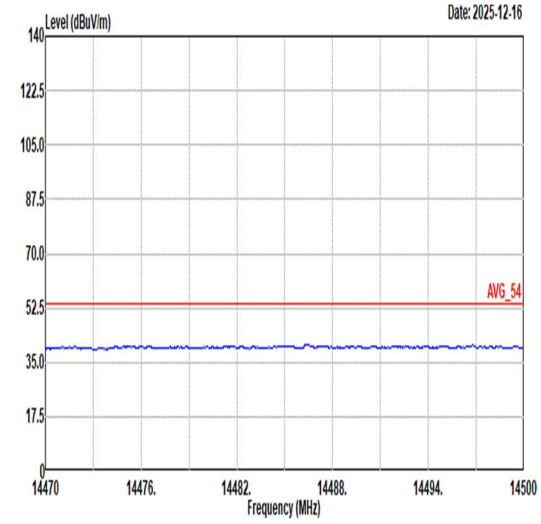 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	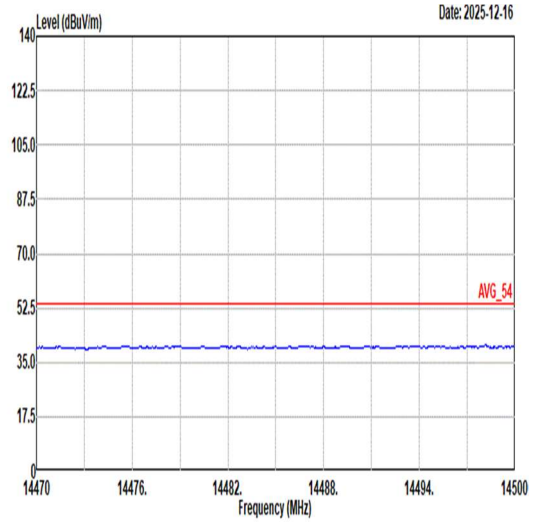 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	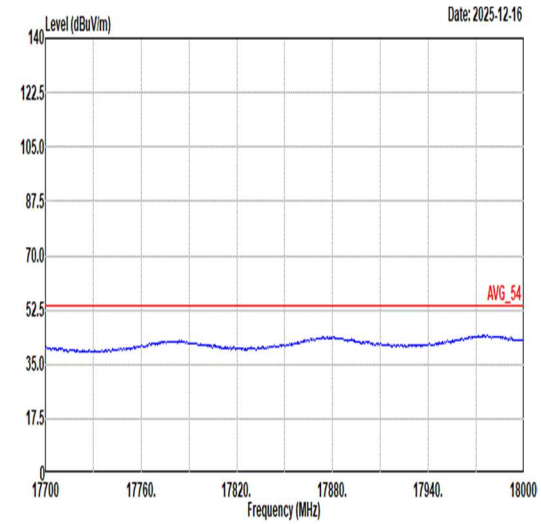 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	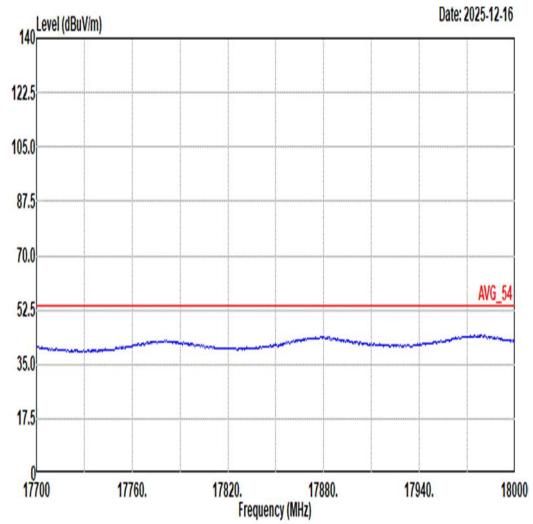 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL

Mode	13	
	Band Edge - L	
	2400-2483.5_BLE CS ASK_CH38_2440MHz	
ANT	4	
Pol.	Horizontal	Fundamental
Peak	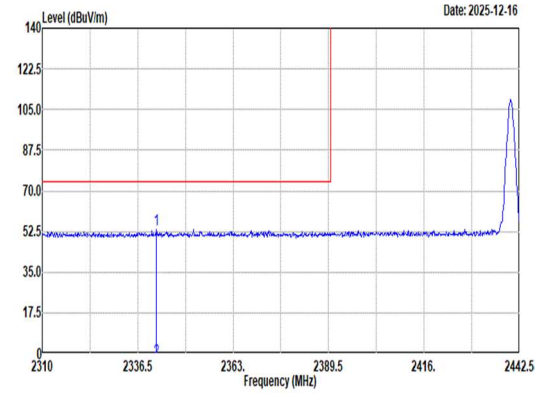 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2341.67 53.49 74.00 -20.51 44.84 27.13 8.49 36.89 9.92 357 68 Peak 2 2341.67 -2.43 54.00 -56.43 -- -- -- -- -- -- -- AVERAGE	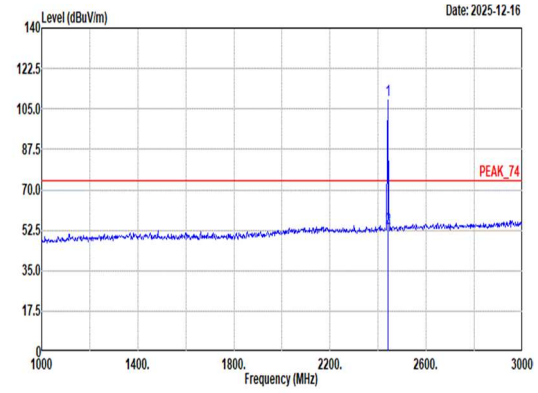 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2440.00 109.05 ------ ------ 99.83 27.50 8.67 36.87 9.92 357 68 Peak 2 2440.00 53.13 ------ ------ -- -- -- -- -- -- -- Average

Mode	13	
	Band Edge - R	
	2400-2483.5_BLE CS ASK_CH38_2440MHz	
ANT	4	
Pol.	Horizontal	Fundamental
Peak	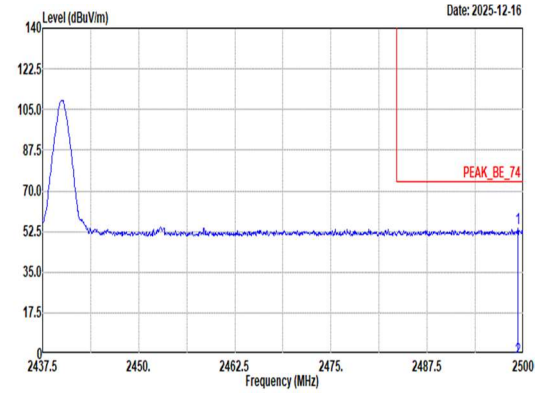 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2499.25 53.74 74.00 -20.26 44.10 27.80 8.78 36.86 9.92 357 68 Peak 2 2499.25 -2.18 54.00 -56.18 -- -- -- -- -- -- -- AVERAGE	Blank

Mode	13	
	Band Edge - L	
	2400-2483.5_BLE CS ASK_CH38_2440MHz	
ANT	4	
Pol.	Vertical	Fundamental
Peak	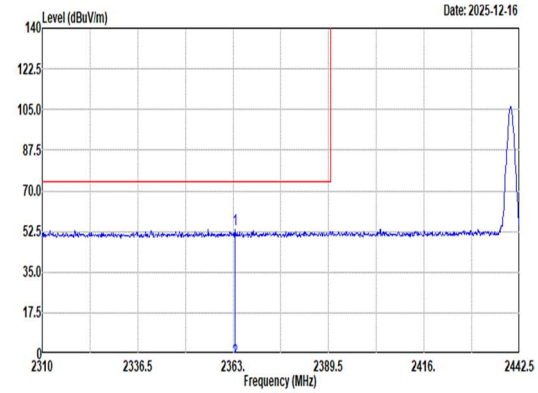 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2363.53 53.33 74.00 -20.67 44.46 27.30 8.53 36.88 9.92 374 296 Peak 2 2363.53 -2.59 54.00 -56.59 -- -- -- -- -- -- -- AVERAGE	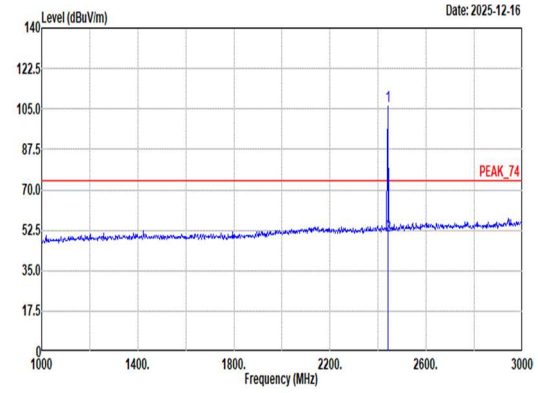 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2440.00 106.11 ------ ------ 96.89 27.50 8.67 36.87 9.92 374 296 Peak 2 2440.00 50.19 ------ ------ -- -- -- -- -- -- -- Average

Mode	13	
	Band Edge - R	
	2400-2483.5_BLE CS ASK_CH38_2440MHz	
ANT	4	
Pol.	Vertical	Fundamental
Peak	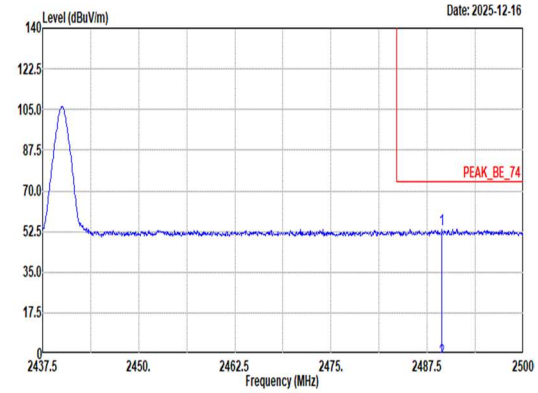 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2489.44 53.29 74.00 -20.71 43.68 27.79 8.76 36.86 9.92 374 296 Peak 2 2489.44 -2.63 54.00 -56.63 -- -- -- -- -- -- -- AVERAGE	Blank

Mode	13	
	Harmonic	
	2400-2483.5_BLE CS ASK_CH38_2440MHz	
ANT	4	
Pol.	Horizontal	Vertical
Peak Avg	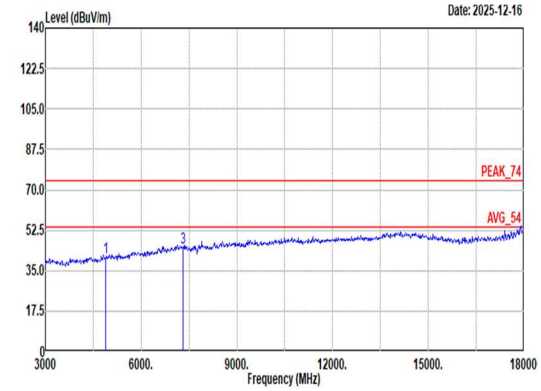 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4880.00 40.62 74.00 -33.38 53.20 32.72 12.36 58.19 0.53 -- -- Peak 2 4880.00 -15.48 54.00 -69.48 -- -- -- -- -- -- -- Average 3 7320.00 45.06 74.00 -28.94 51.68 36.82 15.27 59.04 0.33 -- -- Peak 4 7320.00 -10.86 54.00 -64.86 -- -- -- -- -- -- -- Average	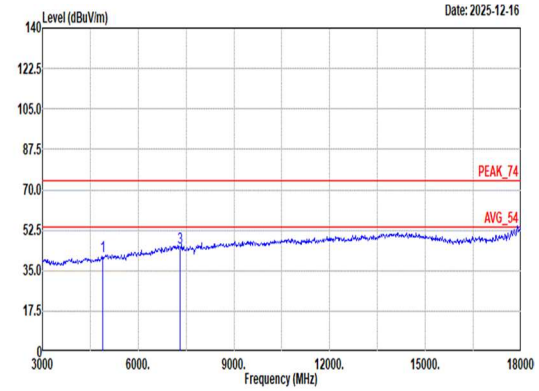 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4880.00 41.02 74.00 -32.98 53.60 32.72 12.36 58.19 0.53 -- -- Peak 2 4880.00 -14.90 54.00 -68.90 -- -- -- -- -- -- -- Average 3 7320.00 44.92 74.00 -29.08 51.54 36.82 15.27 59.04 0.33 -- -- Peak 4 7320.00 -11.00 54.00 -65.00 -- -- -- -- -- -- -- Average

Mode	13	
	Harmonic	
	2400-2483.5_BLE CS ASK_CH38_2440MHz	
ANT	4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	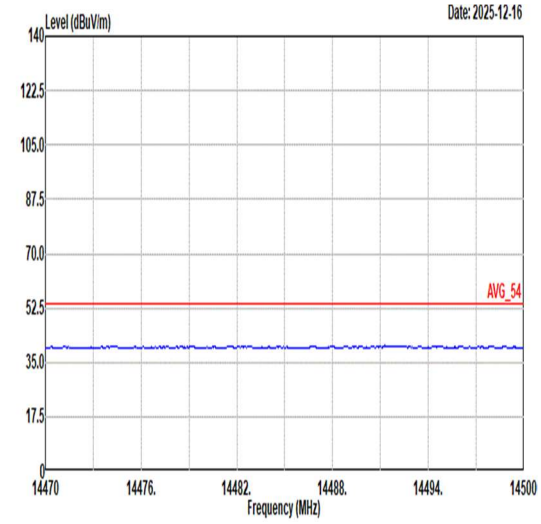 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	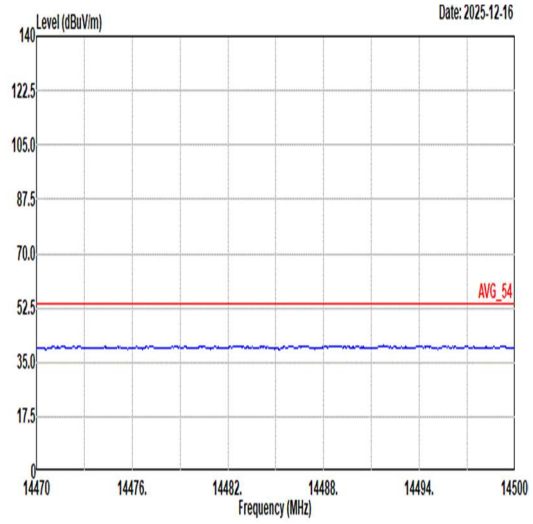 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	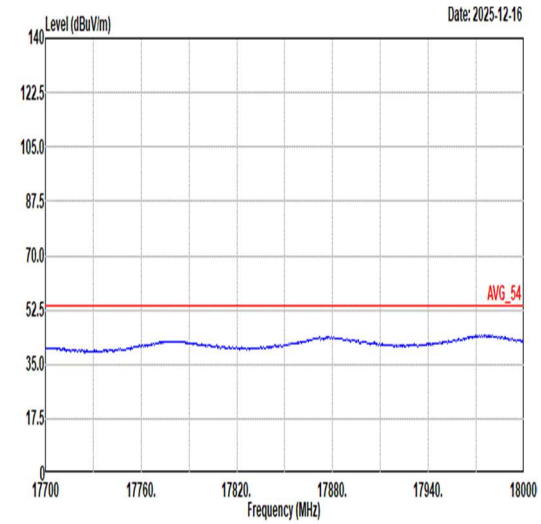 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	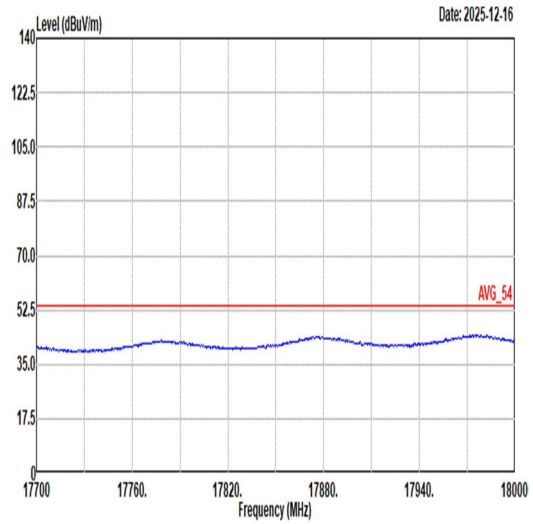 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL

Mode	14	
	Band Edge	
	2400-2483.5_BLE CS ASK_CH76_2478MHz	
ANT	4	
Pol.	Horizontal	Fundamental
Peak	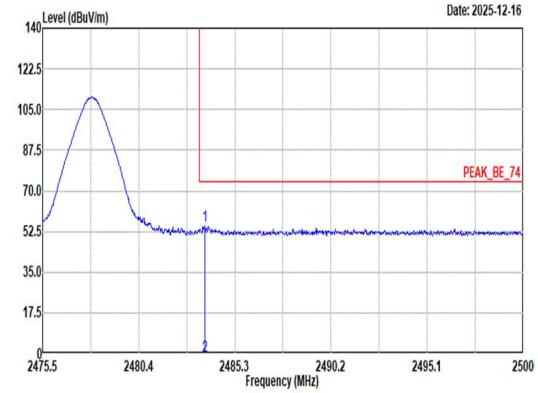 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2483.78 54.91 74.00 -19.09 45.42 27.68 8.75 36.86 9.92 106 44 Peak 2 2483.78 -1.01 54.00 -55.01 -- -- -- -- -- -- -- AVERAGE	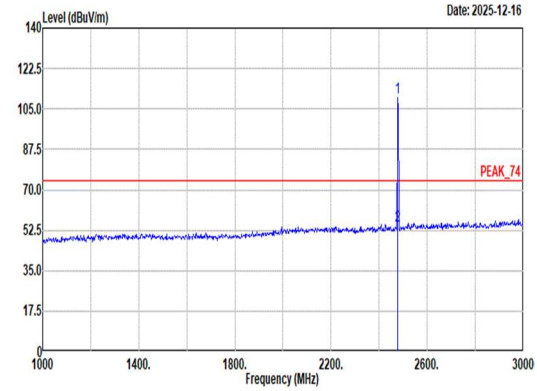 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2478.00 110.09 ------ ------ 100.71 27.58 8.74 36.86 9.92 106 44 Peak 2 2478.00 54.17 ------ ------ -- -- -- -- -- -- -- Average

Mode	14	
	Band Edge	
	2400-2483.5_BLE CS ASK_CH76_2478MHz	
ANT	4	
Pol.	Vertical	Fundamental
Peak	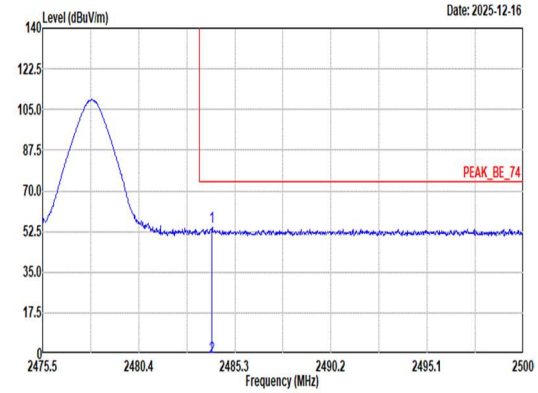 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2484.15 54.39 74.00 -19.61 44.90 27.68 8.75 36.86 9.92 400 299 Peak 2 2484.15 -1.53 54.00 -55.53 -- -- -- -- -- -- -- AVERAGE	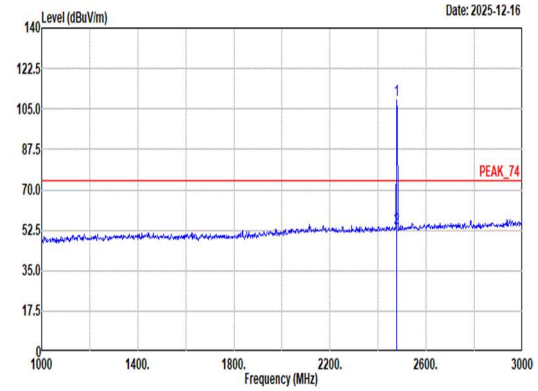 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2478.00 109.08 ------ ------ 99.70 27.58 8.74 36.86 9.92 400 299 Peak 2 2478.00 53.16 ------ ------ -- -- -- -- -- -- -- Average

Mode	14	
	Harmonic	
	2400-2483.5_BLE CS ASK_CH76_2478MHz	
ANT	4	
Pol.	Horizontal	Vertical
Peak Avg	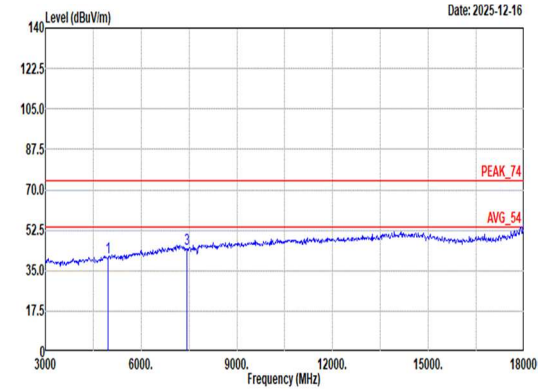 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4956.00 40.92 74.00 -33.08 53.12 33.02 12.44 58.18 0.52 -- -- Peak 2 4956.00 -15.01 54.00 -69.01 -- -- -- -- -- -- -- Average 3 7434.00 44.60 74.00 -29.40 51.71 36.33 15.39 59.16 0.33 -- -- Peak 4 7434.00 -11.32 54.00 -65.32 -- -- -- -- -- -- -- Average	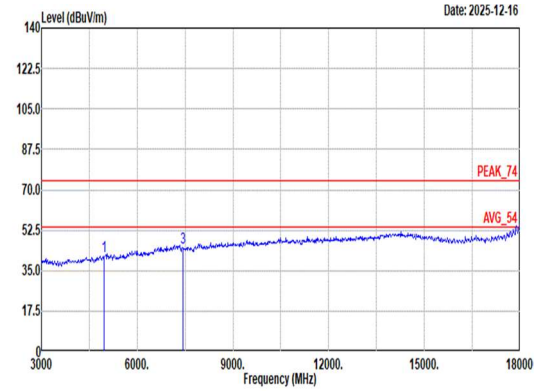 Site : 03CH15-HY Condition: PEAK_74 3m 9120D-02294_250606 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4956.00 41.39 74.00 -32.61 53.59 33.02 12.44 58.18 0.52 -- -- Peak 2 4956.00 -14.54 54.00 -68.54 -- -- -- -- -- -- -- Average 3 7434.00 44.98 74.00 -29.02 52.09 36.33 15.39 59.16 0.33 -- -- Peak 4 7434.00 -10.94 54.00 -64.94 -- -- -- -- -- -- -- Average

Mode	14	
	Harmonic	
	2400-2483.5_BLE CS ASK_CH76_2478MHz	
ANT	4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	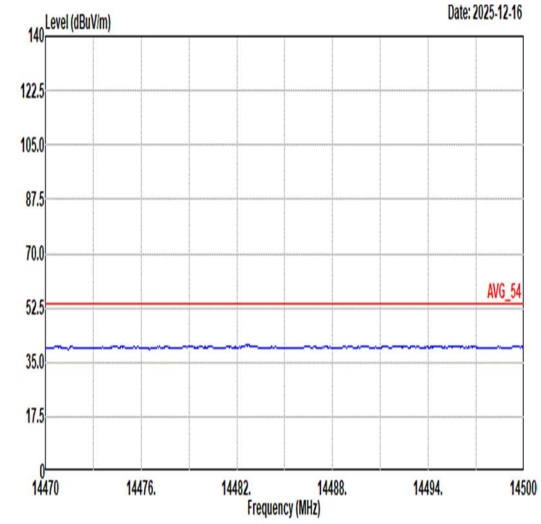 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	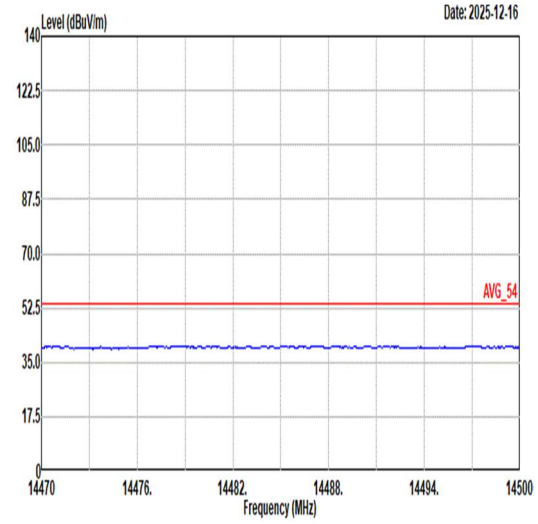 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	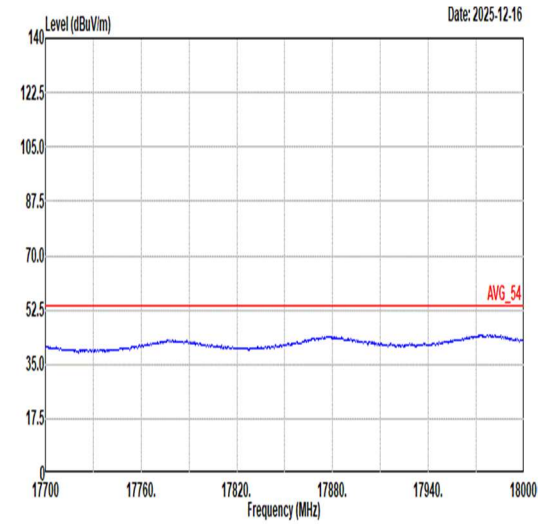 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	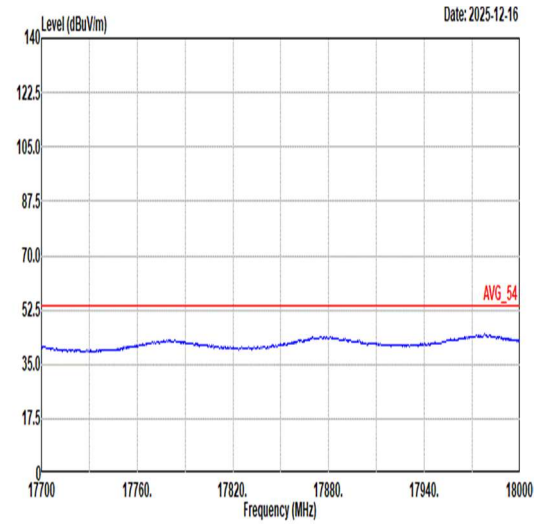 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL

Mode	15	
	LF	
	2400-2483.5_BLE CS ASK_CH76_2478MHz	
ANT	4	
Pol.	Horizontal	Vertical
QP/ Peak	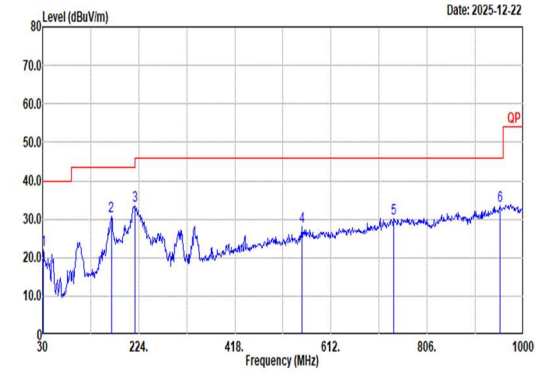	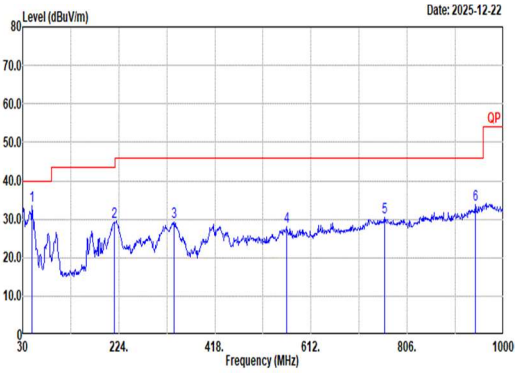

Site : 03CH15-HY
Condition: QP 3m Bilog_41912 & 05_250301 HORIZONTAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	31.94	22.01	40.00	-17.99	29.89	23.55	0.91	32.43	0.09	--	--	Peak
2	168.71	30.87	43.50	-12.63	44.83	15.89	2.30	32.38	0.23	--	--	Peak
3	217.21	33.39	46.00	-12.61	47.97	15.09	2.58	32.34	0.09	--	--	Peak
4	553.80	27.93	46.00	-18.07	30.12	25.96	4.10	32.35	0.10	--	--	Peak
5	739.07	30.16	46.00	-15.84	29.32	28.17	4.77	32.27	0.17	--	--	Peak
6	952.47	33.47	46.00	-12.53	27.62	31.12	5.39	31.02	0.36	--	--	Peak

Site : 03CH15-HY
Condition: QP 3m Bilog_41912 & 05_250301 VERTICAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	49.40	33.56	40.00	-6.44	49.92	14.77	1.21	32.46	0.12	--	--	Peak
2	214.30	29.35	43.50	-14.15	43.95	15.07	2.57	32.33	0.09	--	--	Peak
3	335.55	29.23	46.00	-16.77	38.13	20.00	3.21	32.28	0.17	--	--	Peak
4	563.50	27.95	46.00	-18.05	29.49	26.57	4.14	32.36	0.11	--	--	Peak
5	760.41	30.64	46.00	-15.36	29.39	28.45	4.83	32.21	0.18	--	--	Peak
6	943.74	33.68	46.00	-12.32	28.48	30.60	5.36	31.10	0.34	--	--	Peak

Mode	16	
	SHF	
	2400-2483.5_BLE CS ASK_CH76_2478MHz	
ANT	4	
Pol.	Horizontal	Vertical
Peak	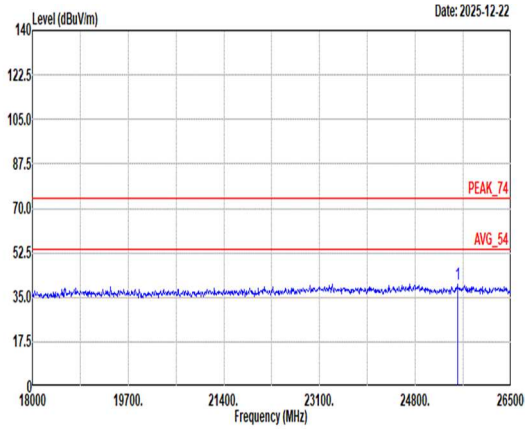 Site : 03CH15-HY Condition: PEAK_74 1m BBHA9170_1225_250702 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 25548.00 39.93 74.00 -34.07 56.97 39.40 6.48 53.38 -9.54 -- -- Peak	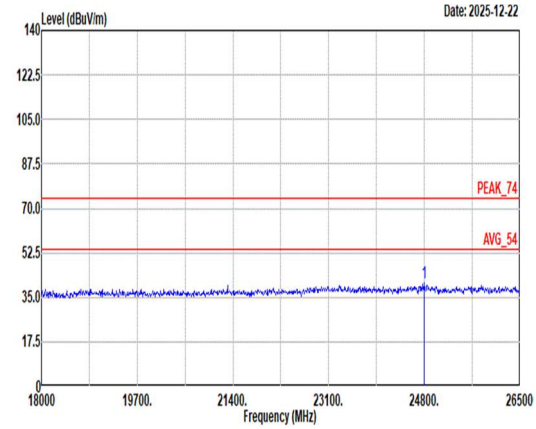 Site : 03CH15-HY Condition: PEAK_74 1m BBHA9170_1225_250702 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 24791.50 40.58 74.00 -33.42 57.39 39.62 6.41 53.30 -9.54 -- -- Peak