

承 认 书

SPECIFICATION FOR APPROVAL

客 户 名 称

:

CUSTOMER`S NAME

客 户 料 号

:

CUSTOMER`S P/N

型 号 规 格

:

Y. A11. 458

MODEL SPEC

制 作 日 期

:

2025年7月29日

ISSUE DATE

拟制 PREPARED BY	审核 CHECKED BY	批准 APPROVED BY	客户承认 CUSTOMER APPROVE
李蓓	程杰	李博文	



东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO., LTD

ADD: No. 533, Fumin Middle Road, Dalang Town, Dongguan City
东莞市大朗镇富民中路533号

TEL: 0769-82866410

FAX: 0769-82866409

Please sign and return this acknowledgment before placing the first production order for this model.
Failure to do so shall be deemed as your acceptance of all contents herein.

本承认书请在首批下单生产此机种前回签，否则视为贵方默认此承认书内所有内容

SPECIFICATION FOR APPROVAL

外


SPECIFICATION FOR APPROVAL



东莞市博红科技有限公司
DONGGUAN BOHONG TECHNOLOGY CO., LTD
SPECIFICATION FOR APPROVAL

CUSTOMER		CUSTOMER'S P/N	
ISSUE DATE	2025年7月29日	PRODUCT SPEC	Y. A11. 458

2.DIMENSION:

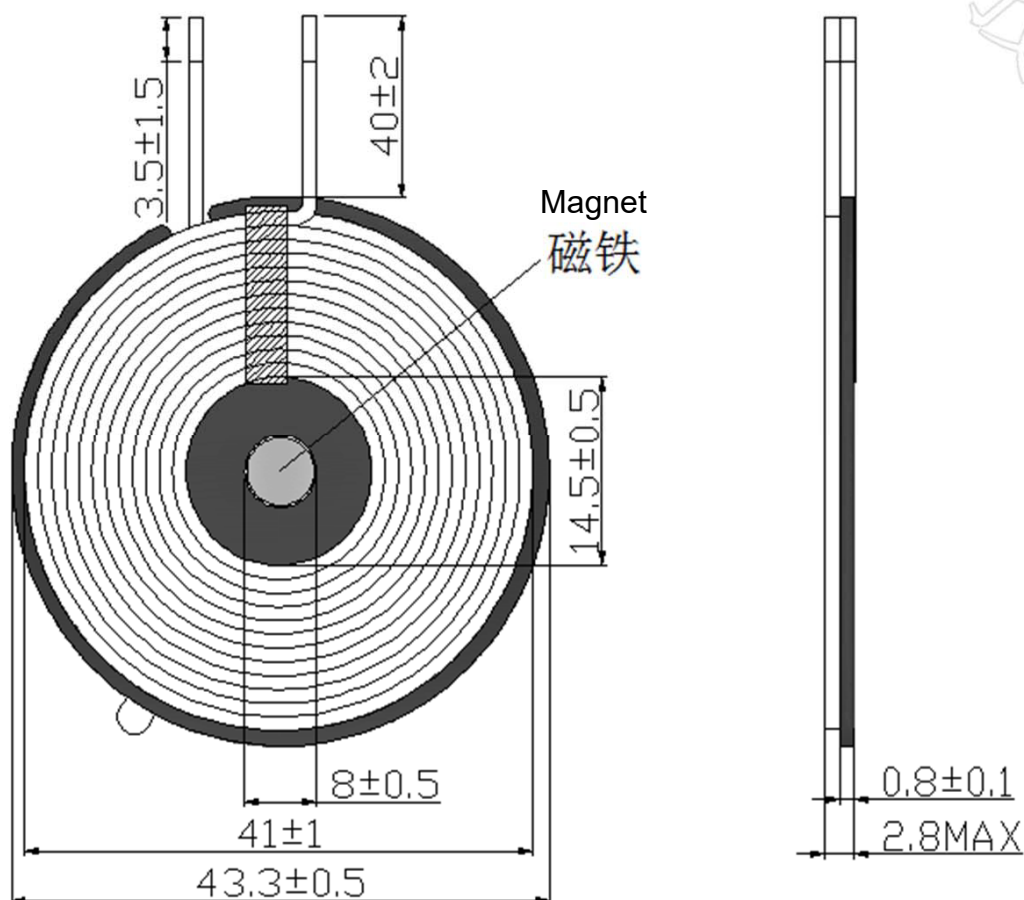

Remark:

- 线圈贴紧磁片，不可翘起；
1. The coil should be tightly attached to the magnetic sheet and must not be tilted;
- 线圈表面整洁，无脏污，中间贴14*8*0.8厚的圆环；
2. The coil surface should be clean and free of dirt, with a 14*8*0.8 thick circular ring attached in the middle;
- 背贴无孔皇冠双面胶，带拉手；
3. Back-adhesive double-sided tape without holes, with easy-to-pull paper;
- 磁片中孔装一颗7.5*2.2N52磁铁，S极朝上；
4. Install a 7.5*2.2N52 magnet in the hole of the magnetic sheet, with the S pole facing up;

ISSUE	李蓓	CHECK	程杰	APPROVAL	李博文
BY		BY		BY	


东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO., LTD

SPECIFICATION FOR APPROVAL

CUSTOMER		CUSTOMER'S P/N	
ISSUE DATE	2025年7月29日	PRODUCT SPEC	Y. A11. 458

4.CIRCUIT DIAGRAM

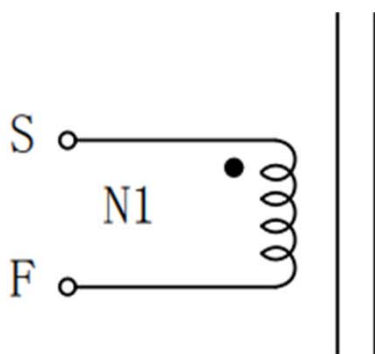

" • ": POLARITY/极性

5.WINDING

NO	WINDING	WIRE	TURNS	TAPE	WINDING CONDITION
N1	S-F	Ø0.08*105P	12	/	CCW

6.CHARACTERISTIC

ITEM	MEASURED POINT	TECHNICAL DATA	TESTING CONDITION & INSTRUMENT
LS	S-F	7uH±5%	LCR1062 100KHz/1V AT 25°C±2°C
Q	S-F	45 Min	LCR1062 100KHz/1V AT 25°C±2°C
DCR	S-F	50mΩ Max	LCR1062 1KHz/0.3V AT 25°C±2°C


东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO., LTD

SPECIFICATION FOR APPROVAL


CUSTOMER		CUSTOMER'S P/N	
ISSUE DATE	2025年7月29日	PRODUCT SPEC	Y. A11. 458

7.THE PACKING WAY

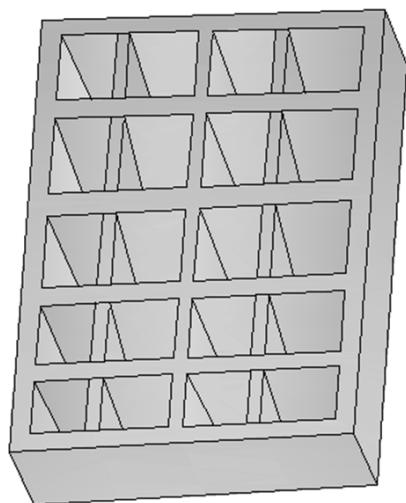

1. 珍珠棉规格: 355*235*65mm*20格;
2. 每格装15pcs, 每盘300pcs;
3. 每箱装5盘;
4. 每箱合计: 1500pcs;

1. Specification of pearl cotton: 355*235*65mm*20 compartments;
2. Each compartment holds 15 Pcs,
each tray contains 15*20=300Pcs;
3. Each box contains 5 trays;
4. Total per box: 1500 Pcs;

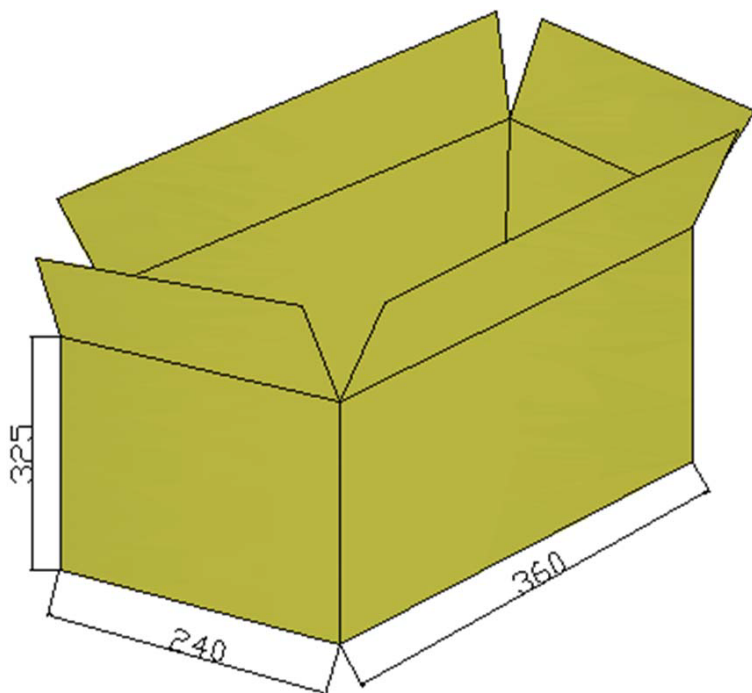

东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO.,LTD

SPECIFICATION FOR APPROVAL

CUSTOMER		CUSTOMER'S P/N	
ISSUE DATE	2025年7月29日	PRODUCT SPEC	Y. A11. 458

备忘录 Memo

序号 No.	内 容 Content	处理方法 Method	签 名 Signature	日 期 Date
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				