HF ROHS

REVISIONS

REV.	DOC.NO	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	/	/	Initial release	Xian Zhang	Micheal Xu	2026-04-20

NOTES:

1. MATERIAL:
   AVERY MATERIAL #BW5054 LABEL STOCK
   WITH THE FOLLOWING PRODUCT CONSTRUCTION:
   FACESTOCK: A matte white biaxially oriented polypropylene film.
   Basis Weight: 58 g/m2±10% ISO536
   Caliper: 0.075 mm±10% ISO534
   ADHESIVE: A general purpose permanent, rubber based adhesive.
   LINER: A super calendared white glassine paper with excellent roll label converting properties.
   Basis Weight: 60g/m2±10% ISO536
   Caliper: 0.051mm±10% ISO534
   NOTE: SIMILAR LABEL ALLOWABLE WITH PRIOR VALIDATION & APPROVAL
2. FINISH: FOR BACKGROUND COLOR, SEE PART NUMBER CHART.
3. DIMENSIONS ARE IN MILLIMETERS.
4. TOLERANCES: UNLESS OTHERWISE SPECIFIED:
   .XX: ± 1.0
   ANGLES: ± 1°
5. CONTROL CHARACTERISTICS (■) SHALL BE IN ACCORDANCE WITH OP 148887.
6. SUPPLIER PRODUCTION APPROVAL SHALL BE IN ACCORDANCE WITH OP 188187.
7.标注(FAI)的尺寸为FAI尺寸，在每次进料时必须做FAI
8.标注(KPC)的尺寸表示需要CPK管控
9. 粘着力>800gf/inch

1.材料:艾利材料# BW5054标签具有以下产品结构:
表面材料:一种哑光白色双轴定向聚丙烯薄膜。
重量:58g /m2±10% ISO536
卡尺:0.075 mm±10% ISO534
胶粘剂:一种通用的永久性橡胶基胶粘剂。
离型纸:一种超级哑光白色玻璃纸，具有优异的卷标转换性能。
重量:60g/m2±10% ISO536
卡尺:0.051mm±10% ISO534
注:类似的标签允许事先验证和批准
2.成品:底色见零件编号图
3.尺寸以毫米为单位
4.公差:除非另有说明:
.xx: ± 1.0
角度: ±1°
5.控制特性(■)应符合OP 148887
6.供应商的生产批准应符合OP 188187
7.标注(FAI)的尺寸为FAI尺寸，在每次进料时必须做FAI
8.标注(KPC)的尺寸表示需要CPK管控
9. 粘着力>800gf/inch
10.有害物质管控:符合环保QW-Q-043规定

FAI 1

77 mm

31 mm

FAI 2

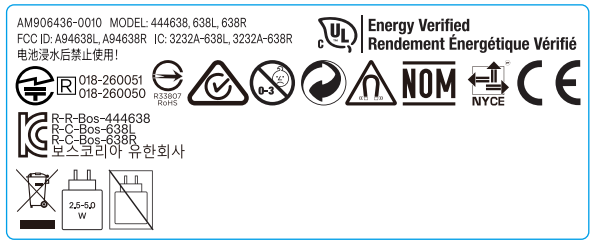

X.X: ±0.2	±0.10
X.XX: ±0.050	
ANGLES:	±0.5
UNITS:	mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LUXSHARE-ICT AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LUXSHARE-ICT

PART NO.: 170-773110-002H

TITLE: Compliance Label_77x31mm

APPD: Micheal Xu 2026-04-20

CHKD: Loong Tang 2026-04-20

DRAW: Xian Zhang 2026-04-20

LUXSHARE-ICT

Customer P/N: 906436-0010

DWGNO.: 170-773110-0020

SCALE	SHEET	REV.
1:1	1/1	A1

YZQR-RD15-020-1