


Appendix B.5: Test Results of Number of Hopping Frequency

BR mode (GFSK)

Channels

Channels	Limit Min	Limit Max	Result
79	15	---	PASS

Sequence

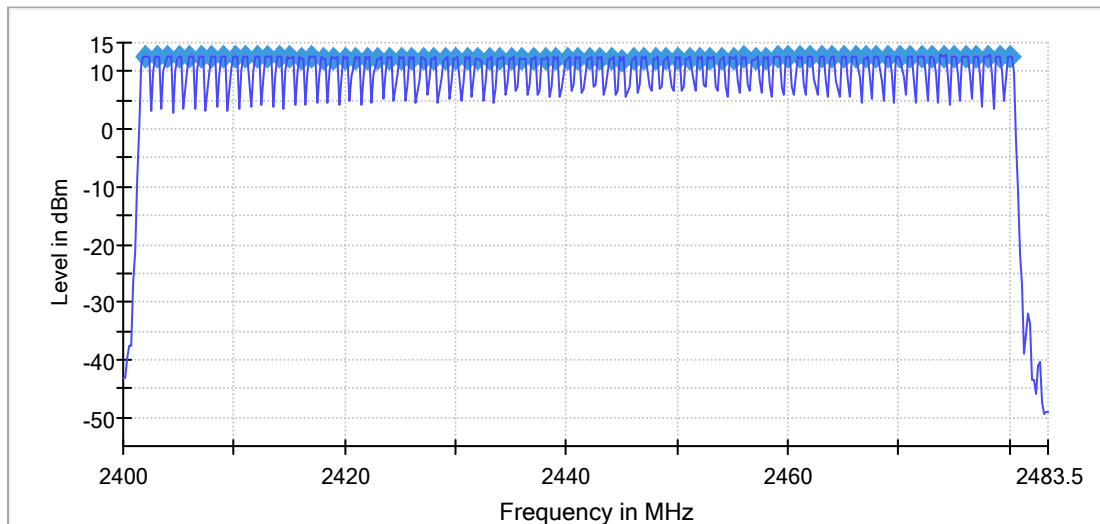


RBW	200.000 kHz
VBW	200.000 kHz

EDR mode (8DPSK)

Channels

Channels	Limit Min	Limit Max	Result
82	15	---	PASS

Sequence

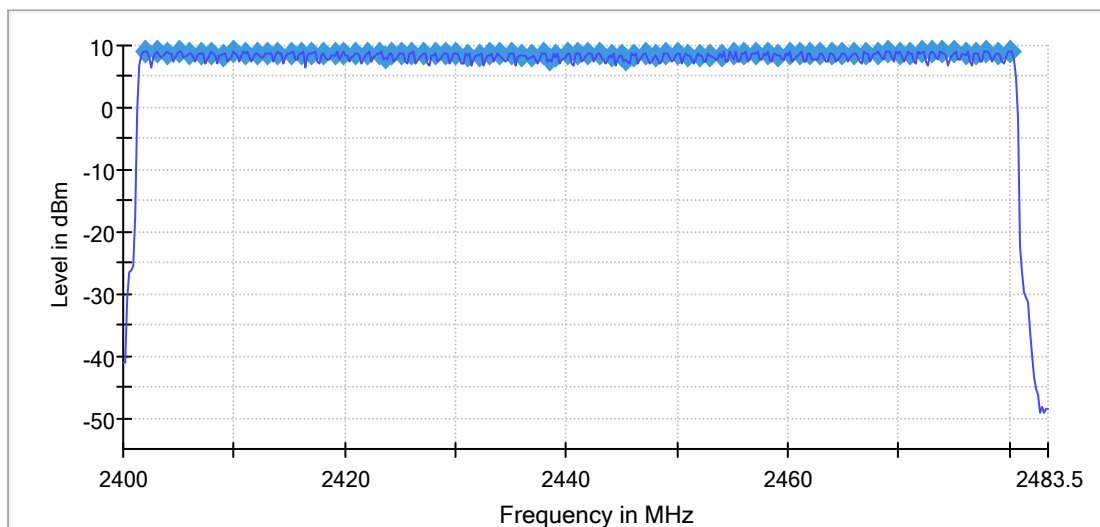

RBW	200.000 kHz
VBW	200.000 kHz

Appendix B.6: Test Results of Time of Occupancy

BR mode (GFSK)

BDR-DH1

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	319	126.750	-10.0

Periode

Min (ms)	Max (ms)	Mean (ms)
3.750	195.000	98.688


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
0.39	0.40	400.000	0.000	0.396

DwellTime

Min (ms)	Max (ms)	Mean (ms)
0.39	0.40	0.396

Time of Channel Occupancy

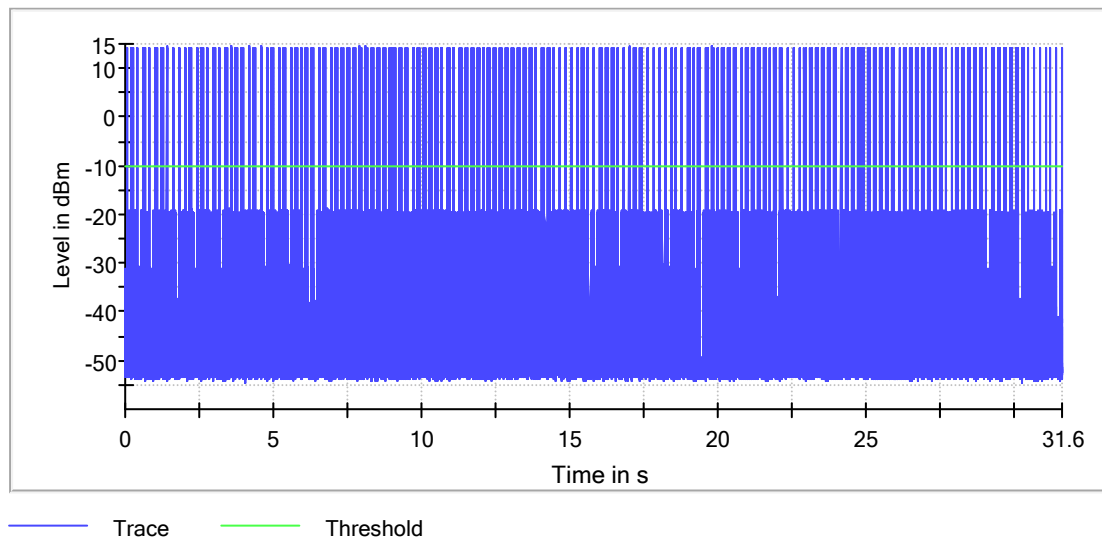

BDR-DH3

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	156	259.280	-10.0

Periode

Min (ms)	Max (ms)	Mean (ms)
17.500	779.980	201.527


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
1.650	1.660	400.000	0.000	1.651

DwellTime

Min (ms)	Max (ms)	Mean (ms)
1.650	1.660	1.651

Time of Channel Occupancy(2)

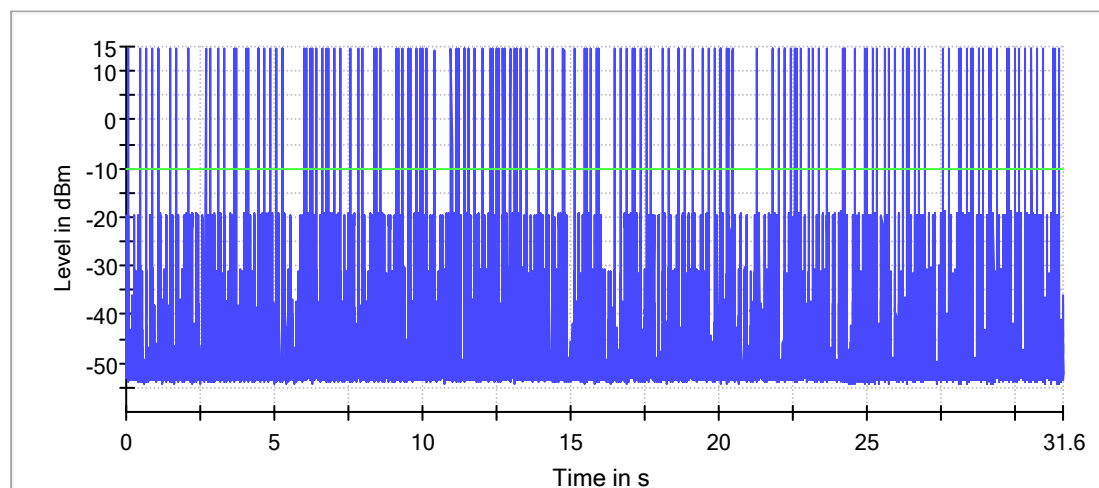

— Trace — Threshold

BDR-DH5

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	98	287.100	-10.0

Periode

Min (ms)	Max (ms)	Mean (ms)
30.000	1342.460	315.224


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
2.900	2.900	400.000	0.000	2.900

DwellTime

Min (ms)	Max (ms)	Mean (ms)
2.900	2.900	2.900

Time of Channel Occupancy(3)

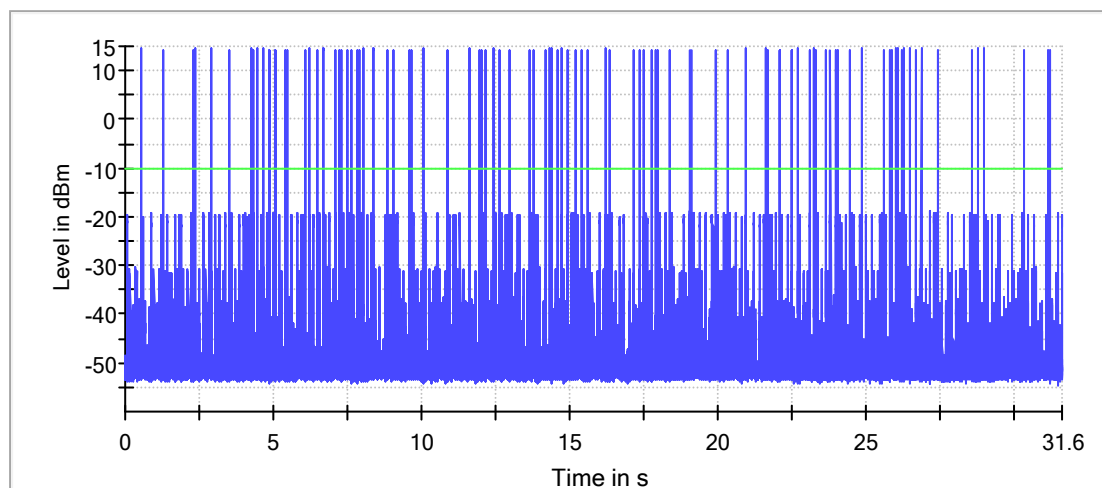

— Trace — Threshold

EDR mode (8DPSK)

EDR-3DH1

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	318	127.190	-10.0

Periode

Min (ms)	Max (ms)	Mean (ms)
3.750	196.240	98.956


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
0.39	0.40	400.000	0.000	0.399

DwellTime

Min (ms)	Max (ms)	Mean (ms)
0.39	0.40	0.399

Time of Channel Occupancy

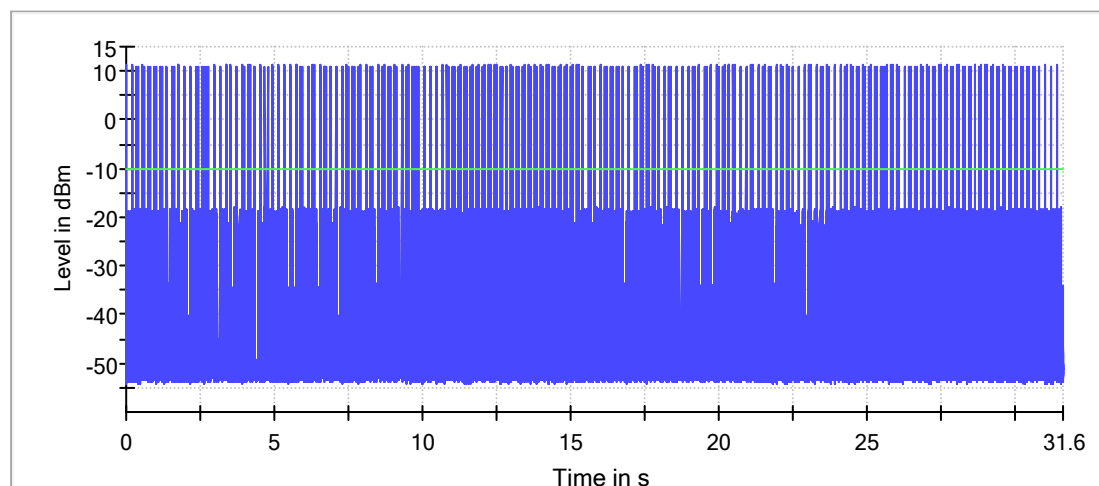

— Trace — Threshold

EDR-3DH3

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	150	249.050	-10.0

Periode

Min (ms)	Max (ms)	Mean (ms)
19.990	854.980	210.380


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
1.640	1.650	400.000	0.000	1.649

DwellTime

Min (ms)	Max (ms)	Mean (ms)
1.640	1.650	1.649

Time of Channel Occupancy(2)

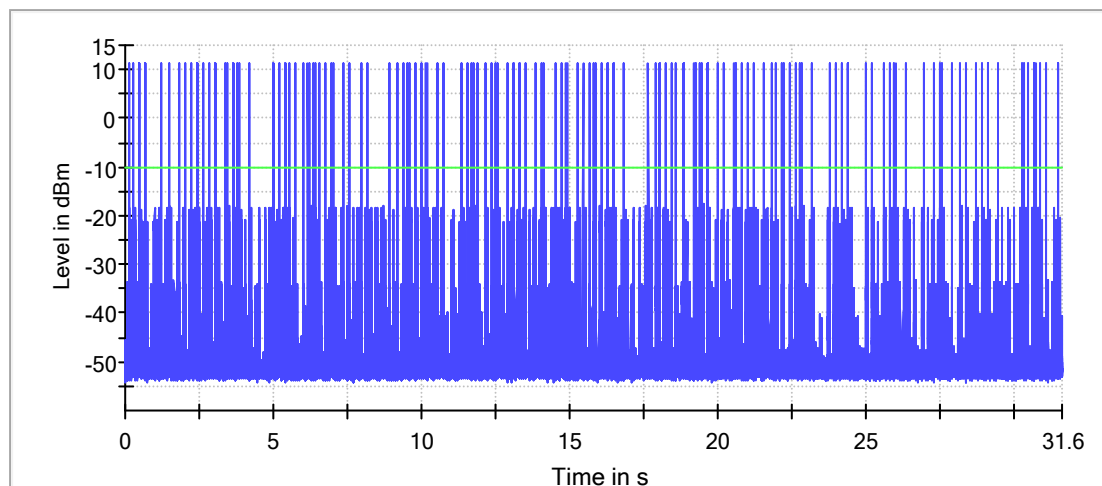

Trace Threshold

EDR-3DH5

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	96	281.340	-10.0

Periode

Min (ms)	Max (ms)	Mean (ms)
18.750	1199.970	328.333


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
2.900	2.910	400.000	0.000	2.900

DwellTime

Min (ms)	Max (ms)	Mean (ms)
2.900	2.910	2.900


Time of Channel Occupancy(3)

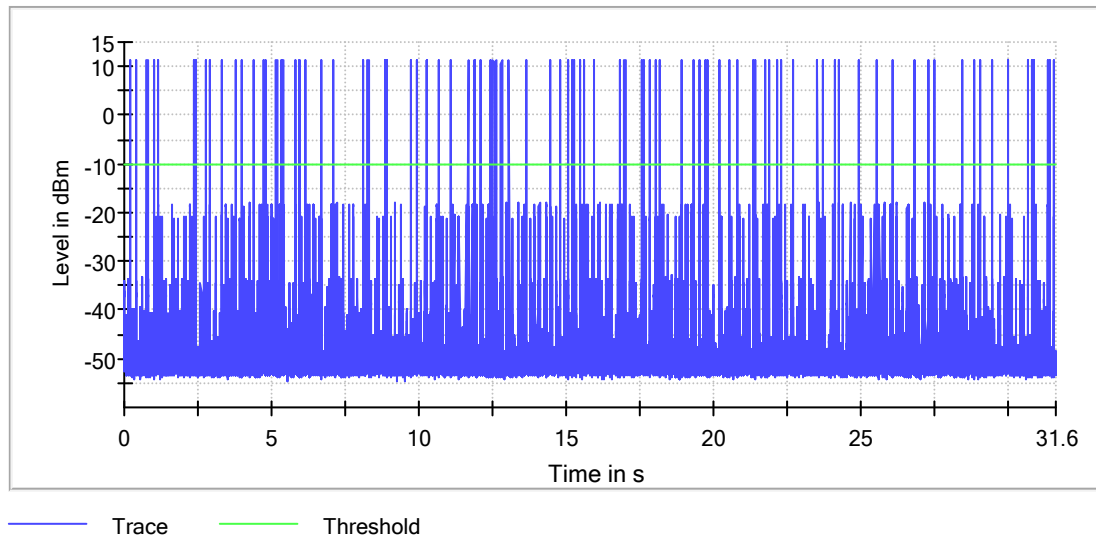


Appendix B.7: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth

BR mode (GFSK)

Low Channel

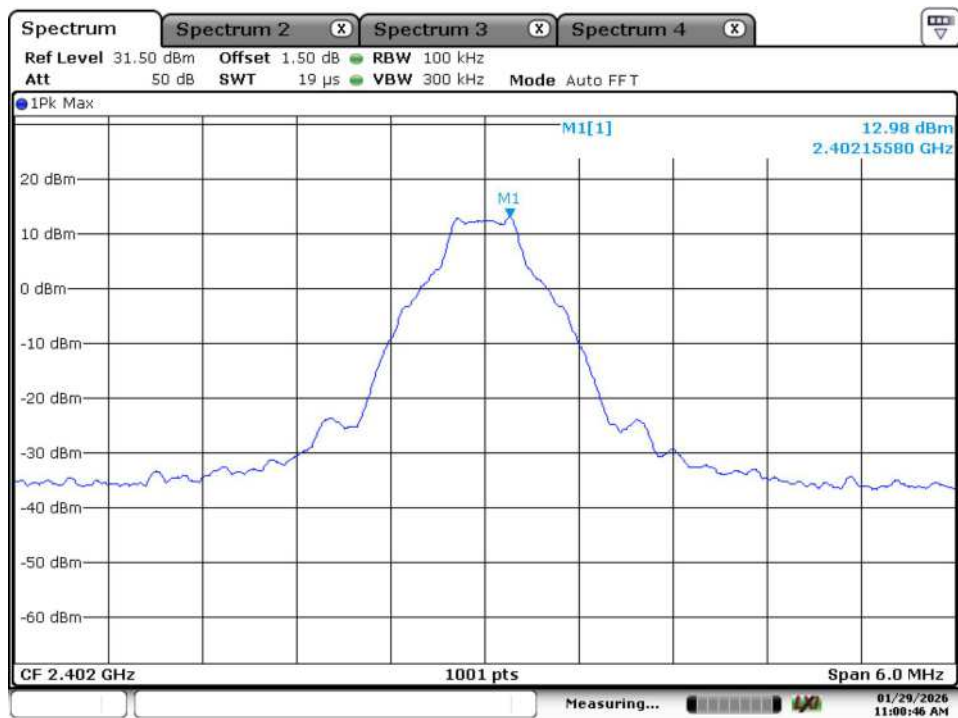


Date: 29.JAN.2026 11:00:46

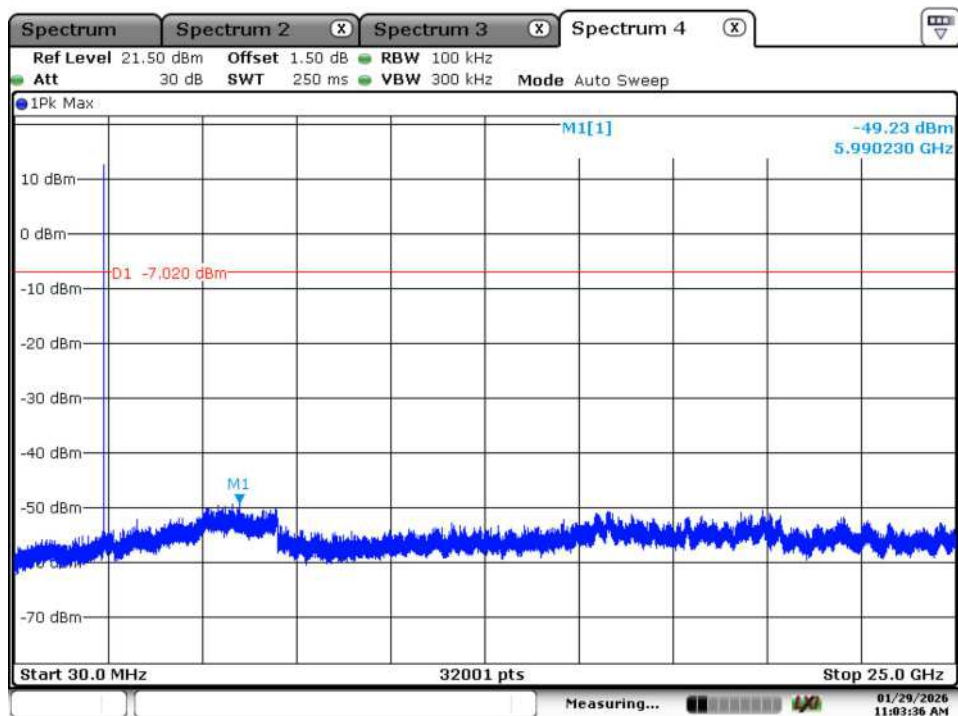


Date: 29.JAN.2026 11:03:36

Middle Channel


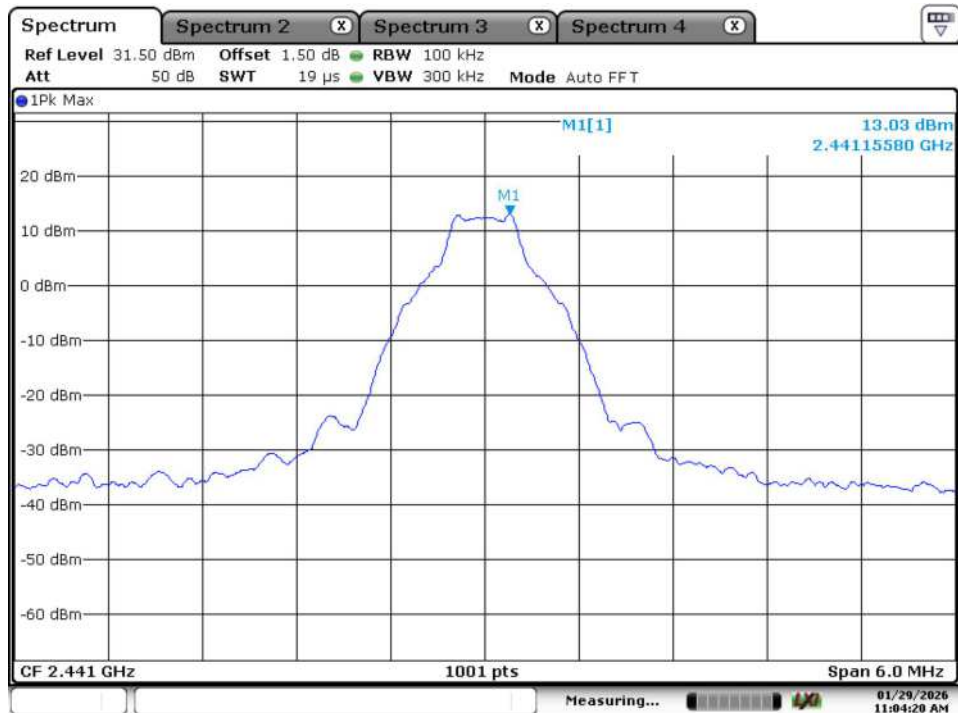


Date: 29.JAN.2026 11:04:21

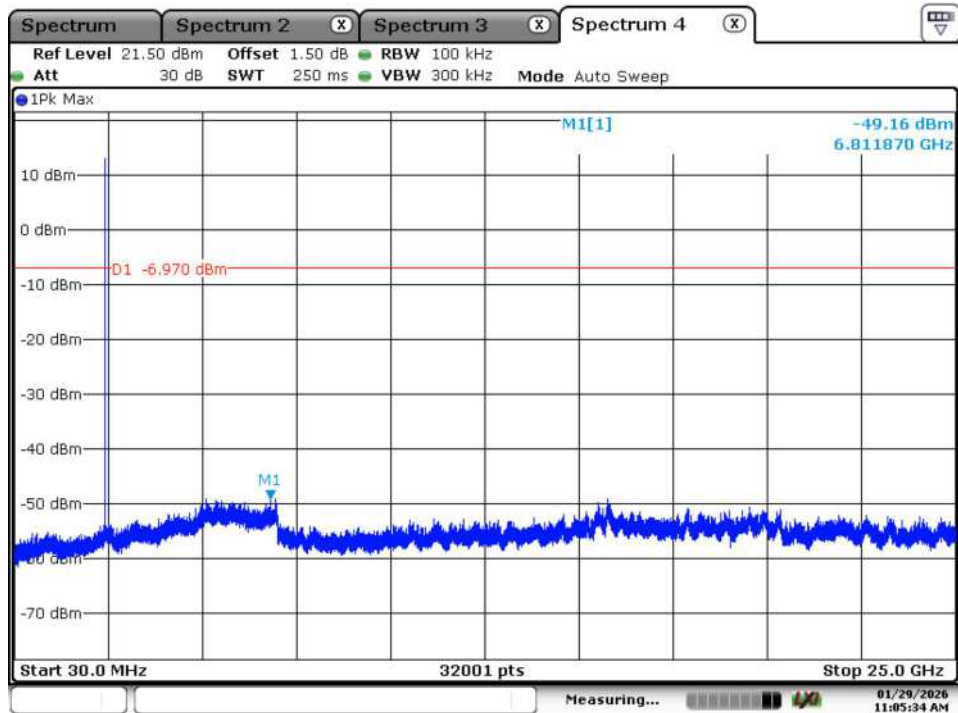


Date: 29.JAN.2026 11:05:35


High Channel

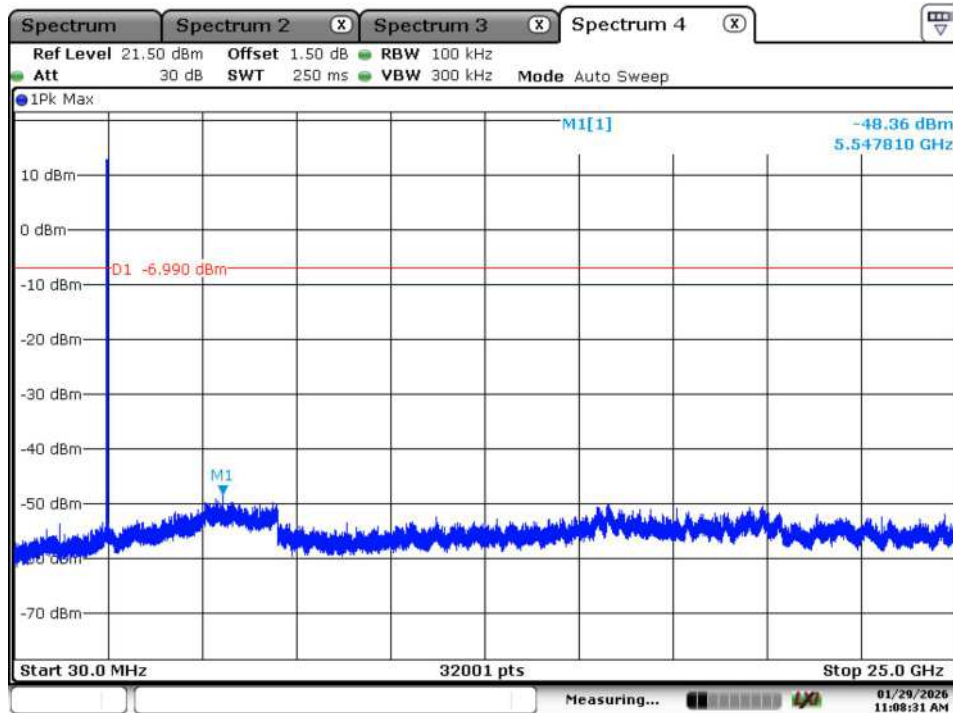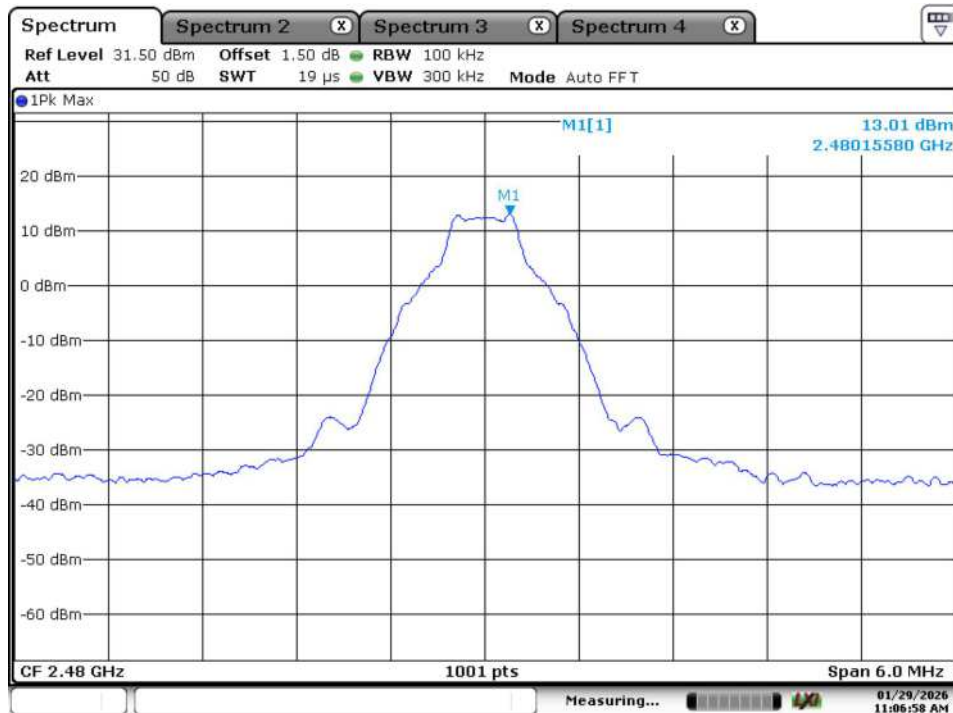


Band Edge, Low Channel

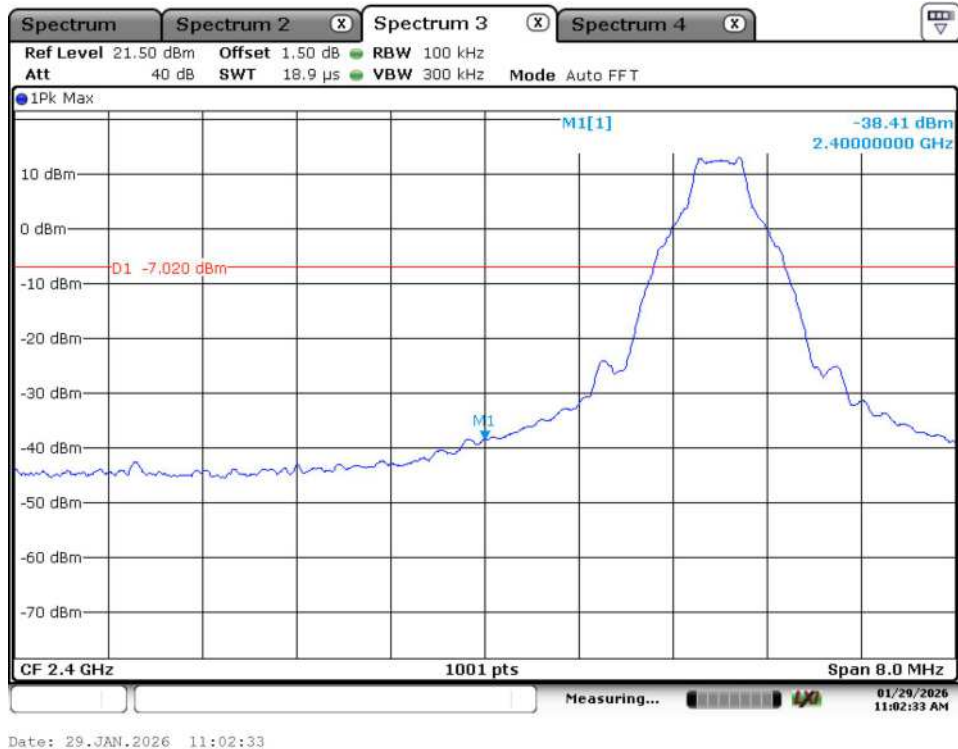


Band Edge, High Channel

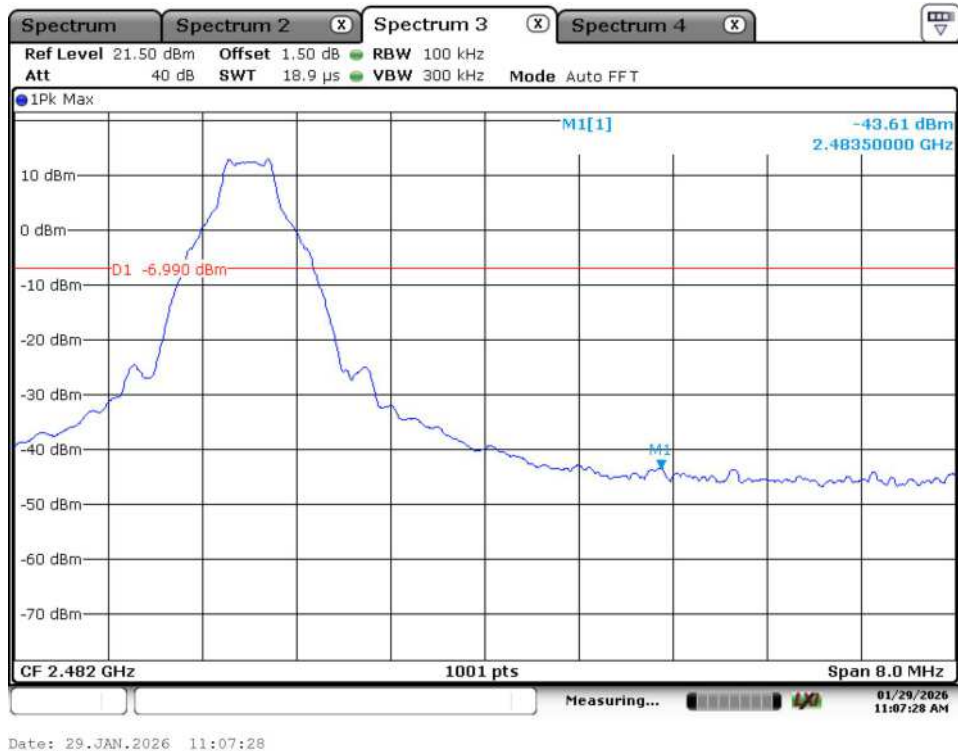

Hopping Mode

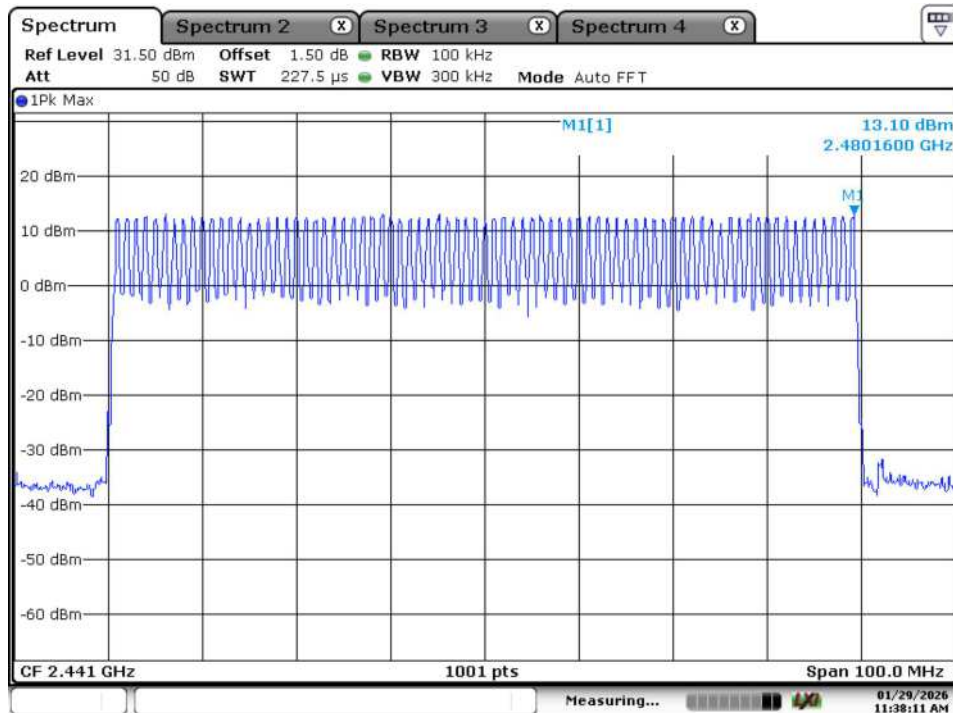


Date: 29.JAN.2026 11:38:11

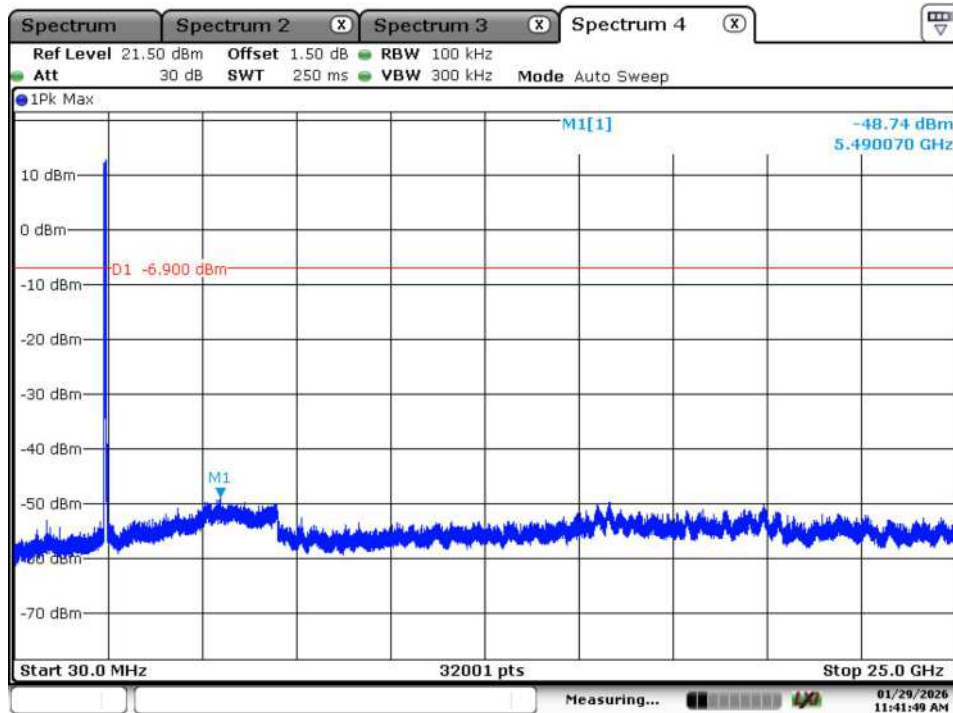


Date: 29.JAN.2026 11:41:49

Band Edge, Hopping Mode, Low Channel

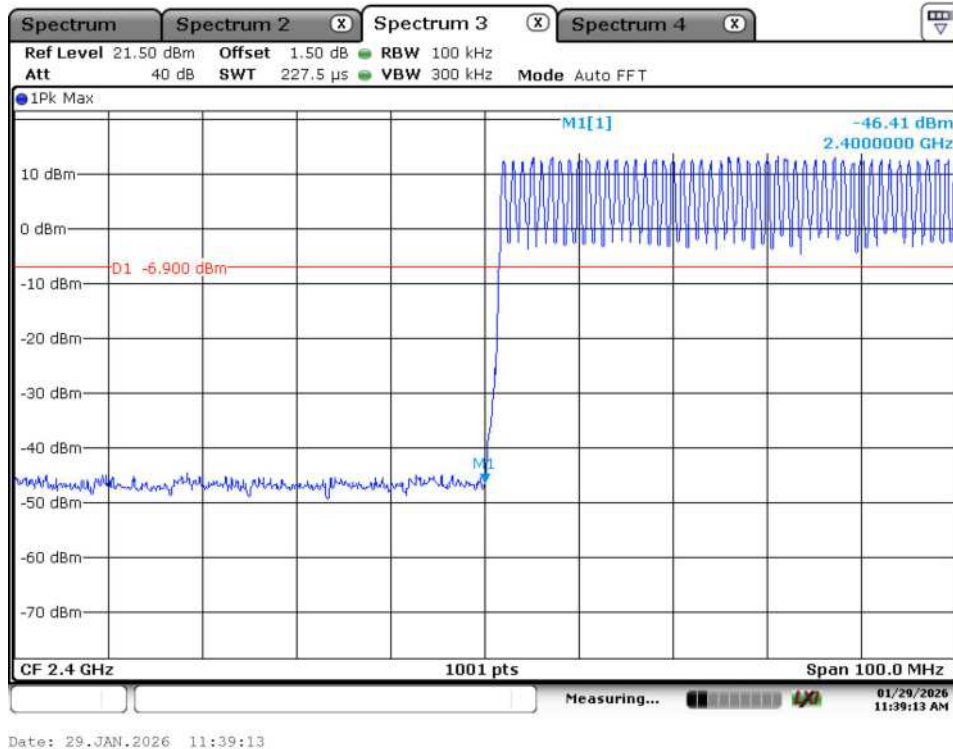


Band Edge, Hopping Mode, High Channel

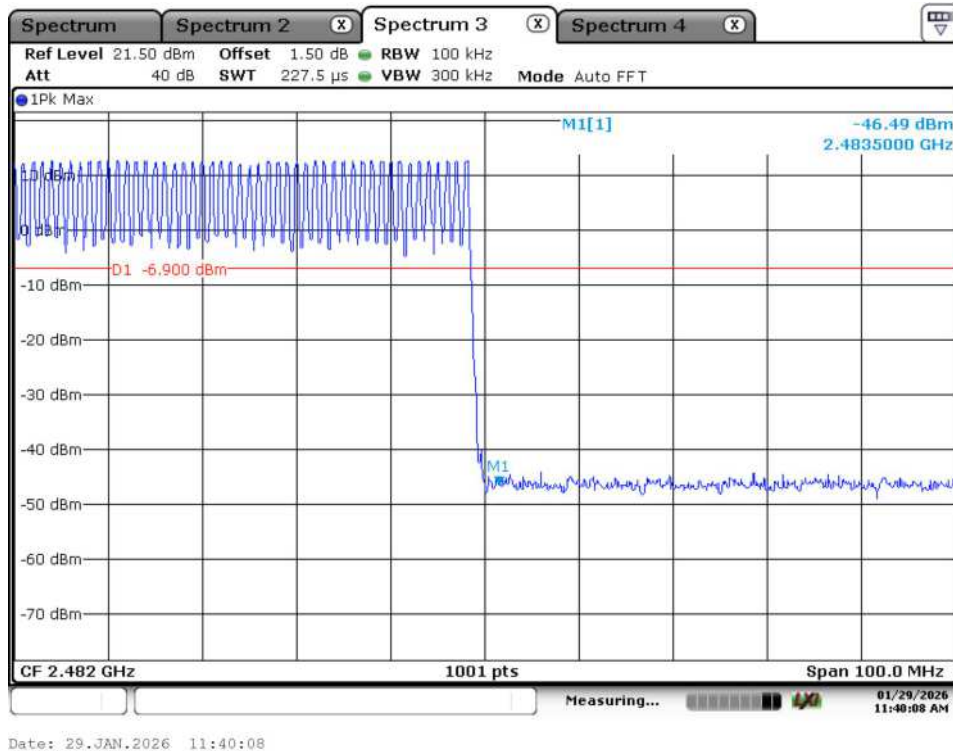


EDR mode (8DPSK)

Low Channel

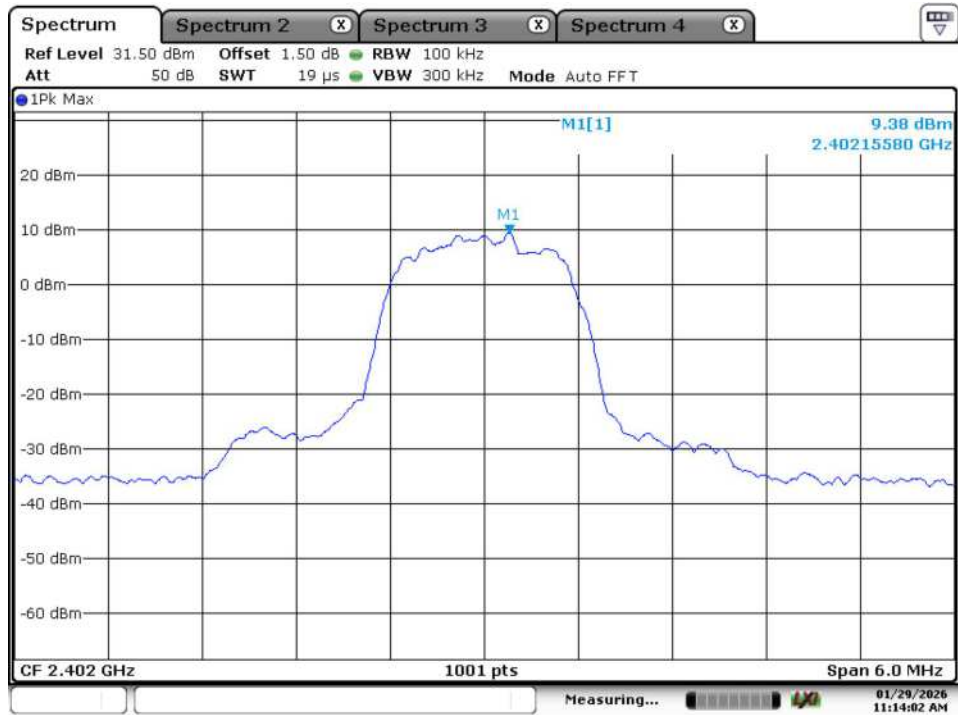


Date: 29.JAN.2026 11:14:02

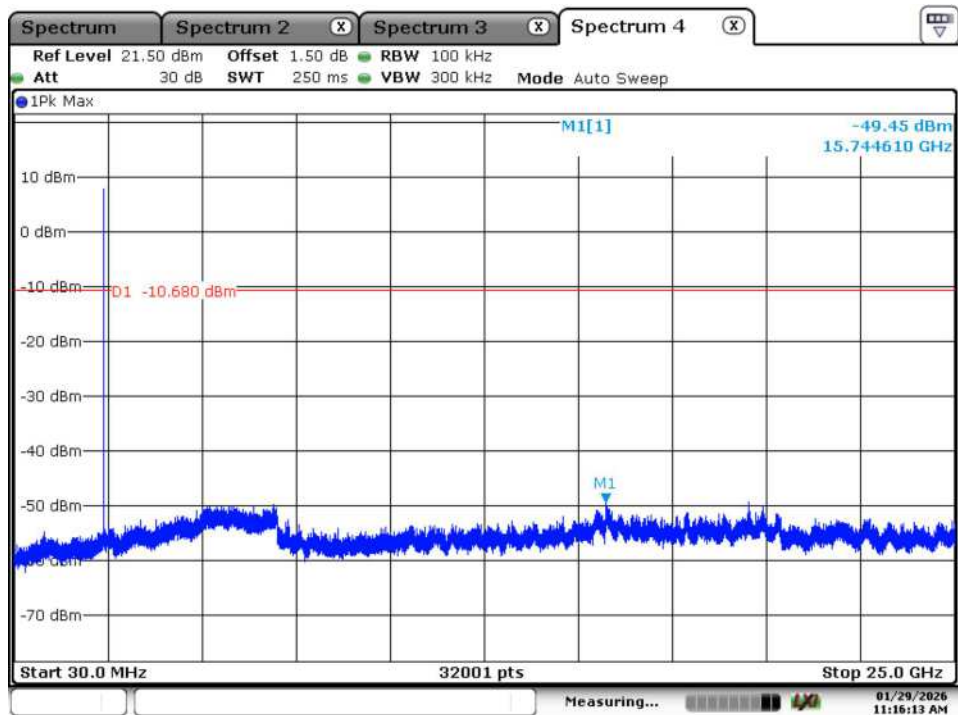


Date: 29.JAN.2026 11:16:13

Middle Channel


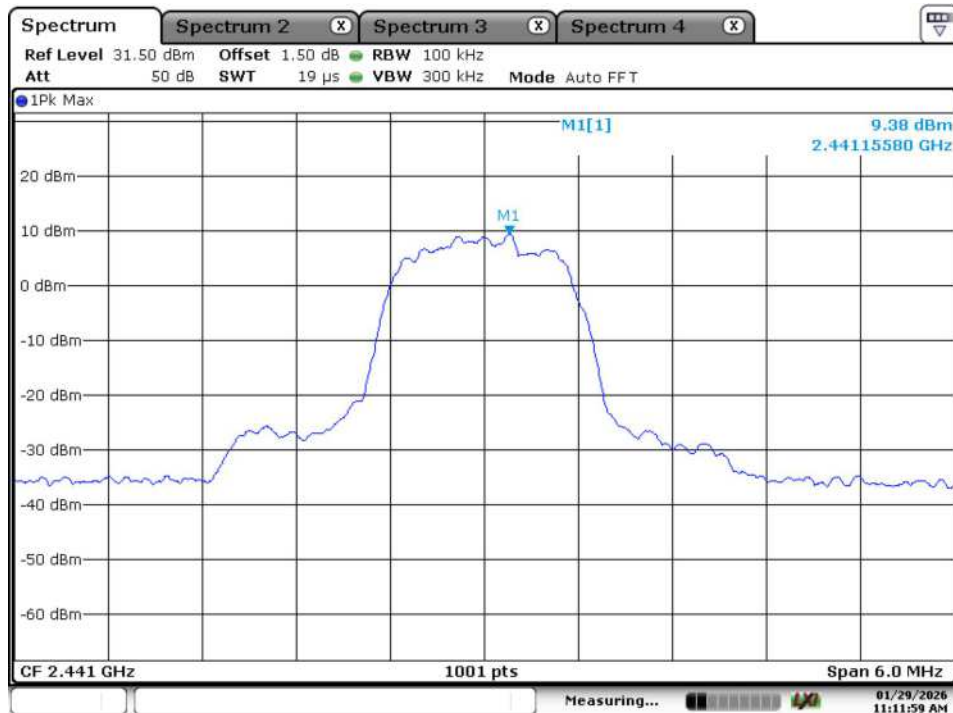


Date: 29.JAN.2026 11:11:59

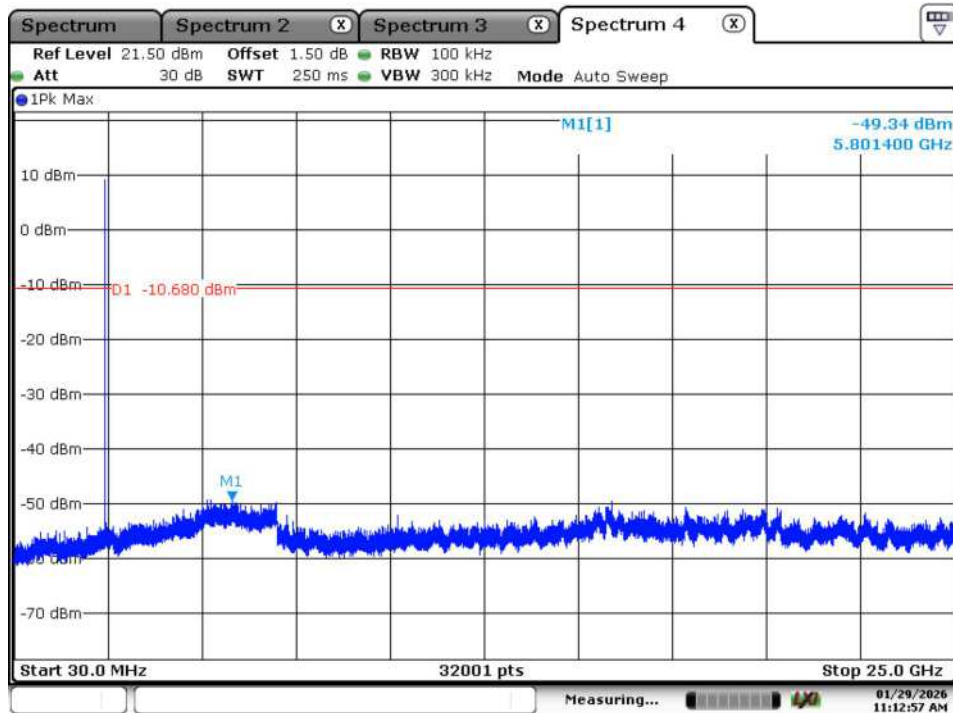


Date: 29.JAN.2026 11:12:57

High Channel

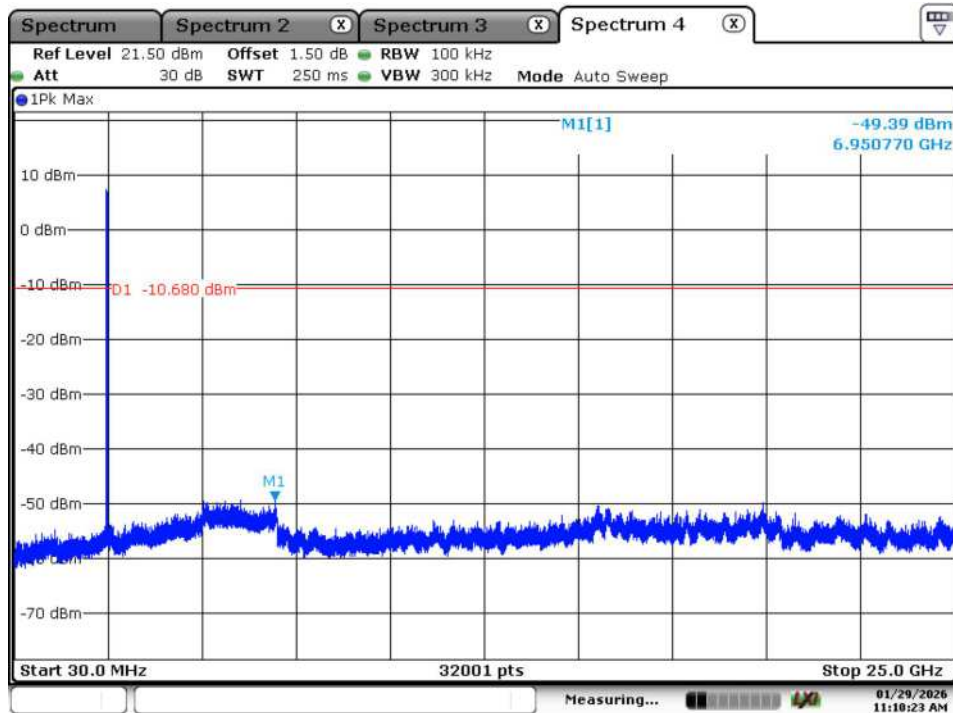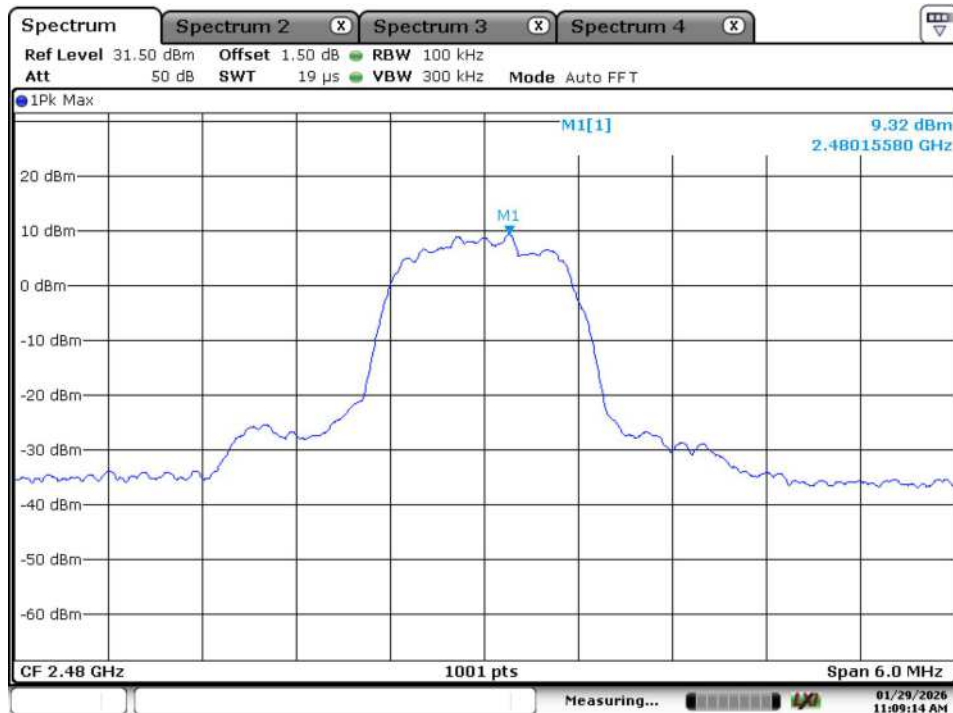


Band Edge, Low Channel

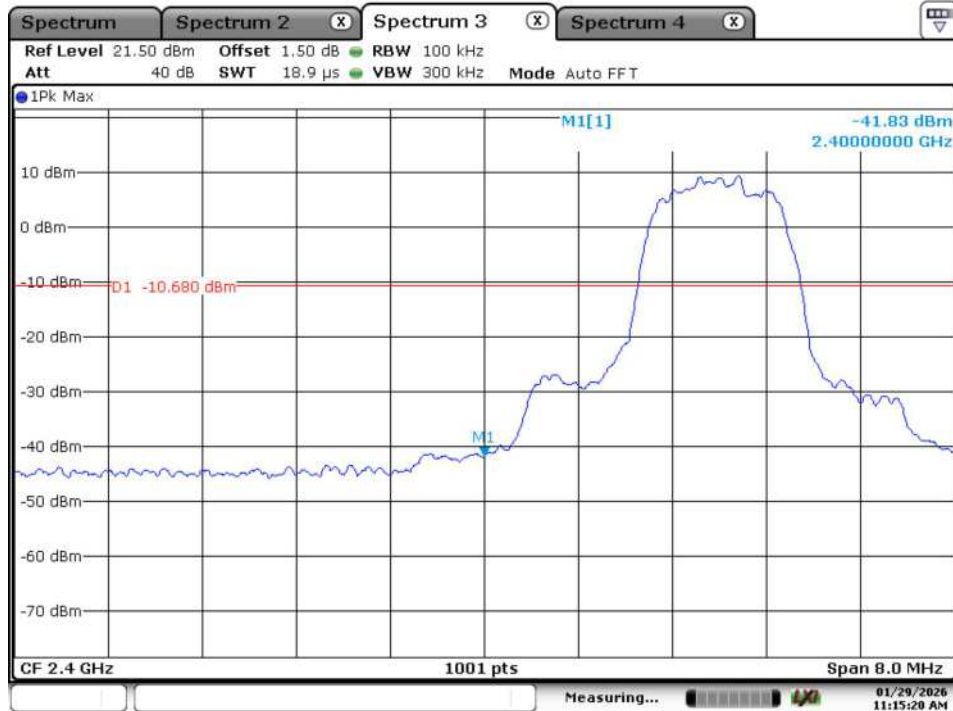


Date: 29.JAN.2026 11:15:21

Band Edge, High Channel

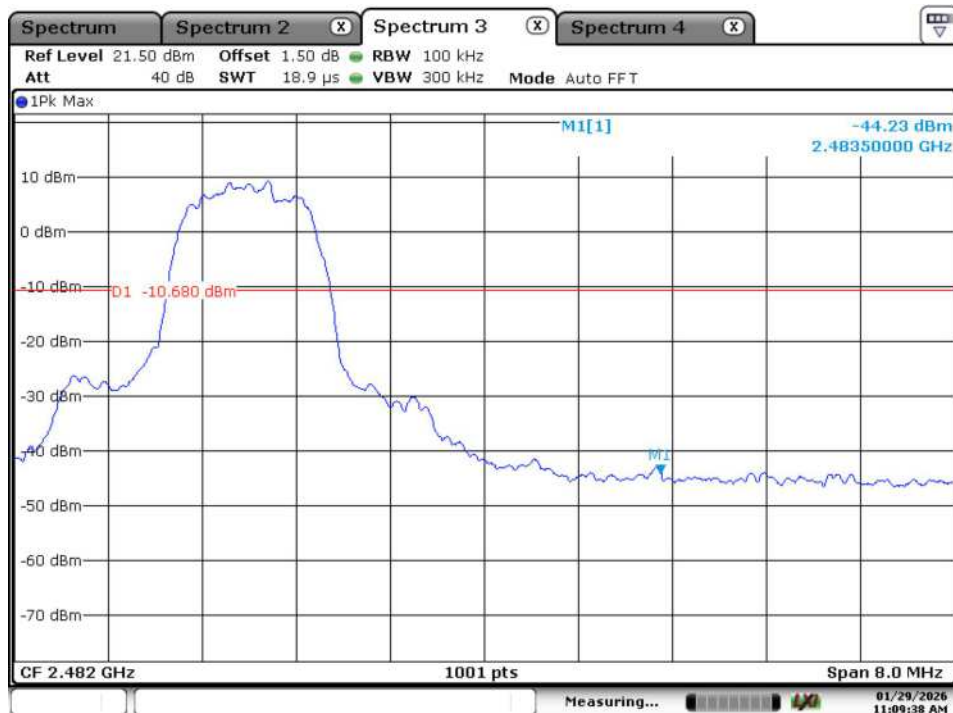


Date: 29.JAN.2026 11:09:39

Hopping Mode

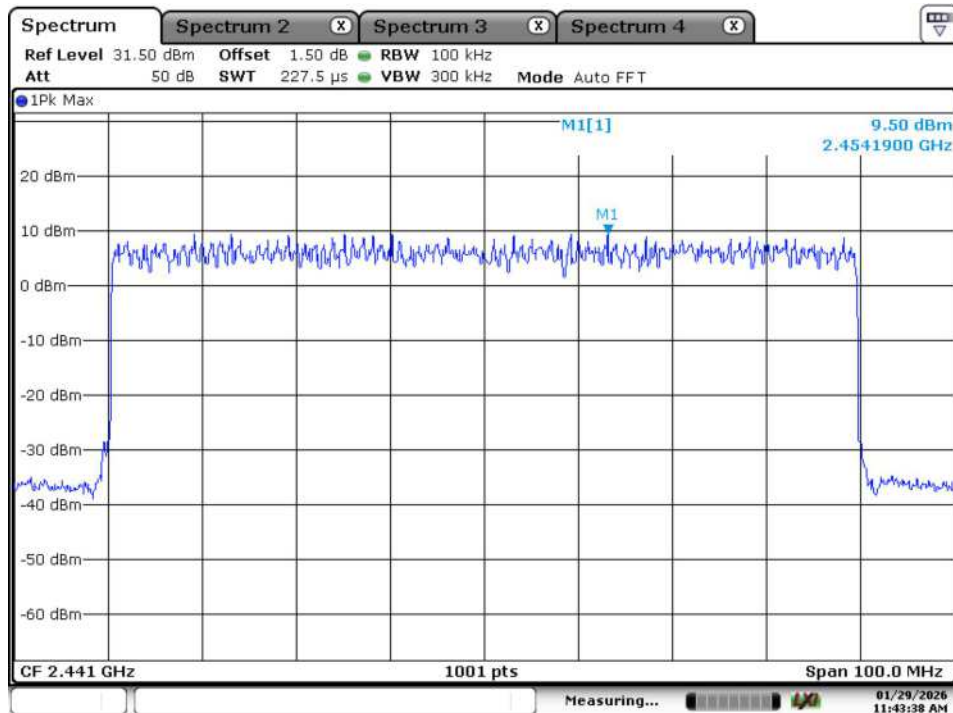


Date: 29.JAN.2026 11:43:39

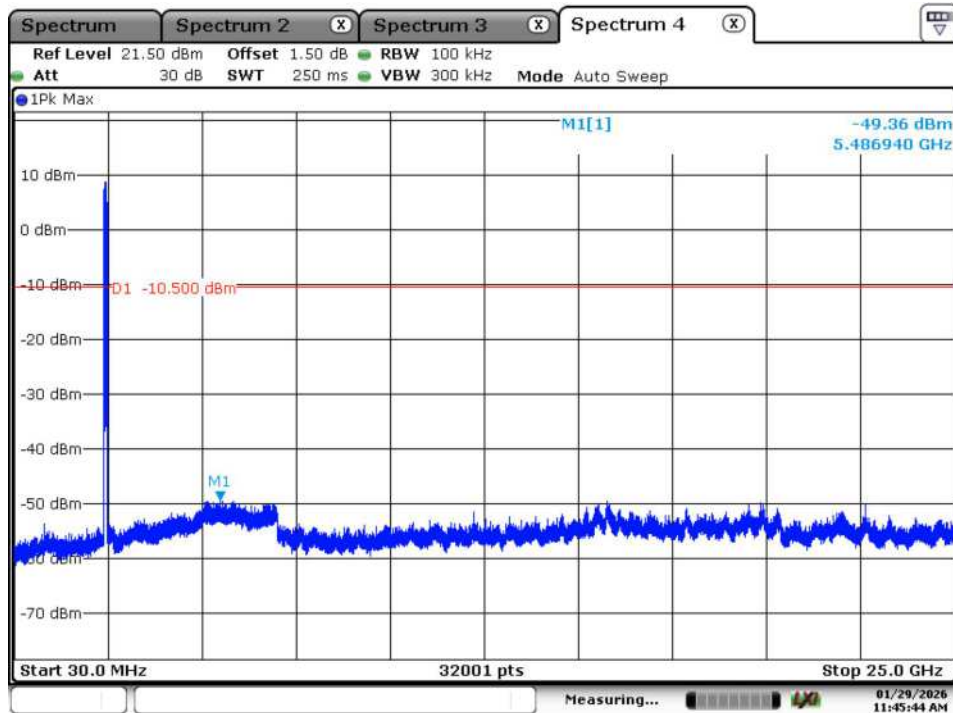


Date: 29.JAN.2026 11:45:44

Band Edge, Hopping Mode, Low Channel

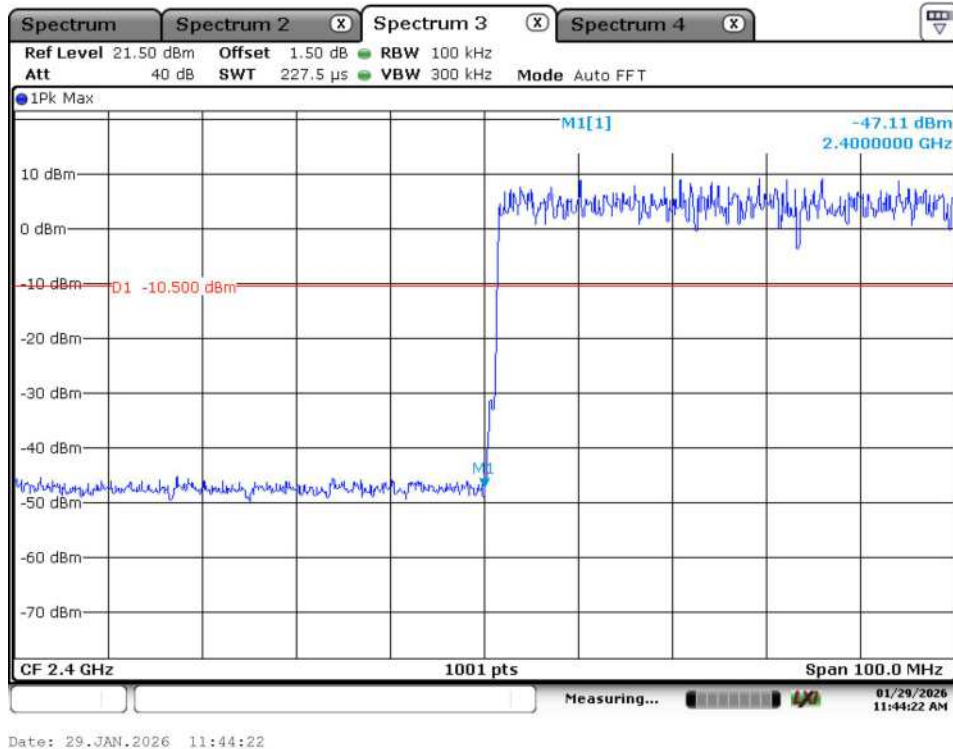

Band Edge, Hopping Mode, High Channel

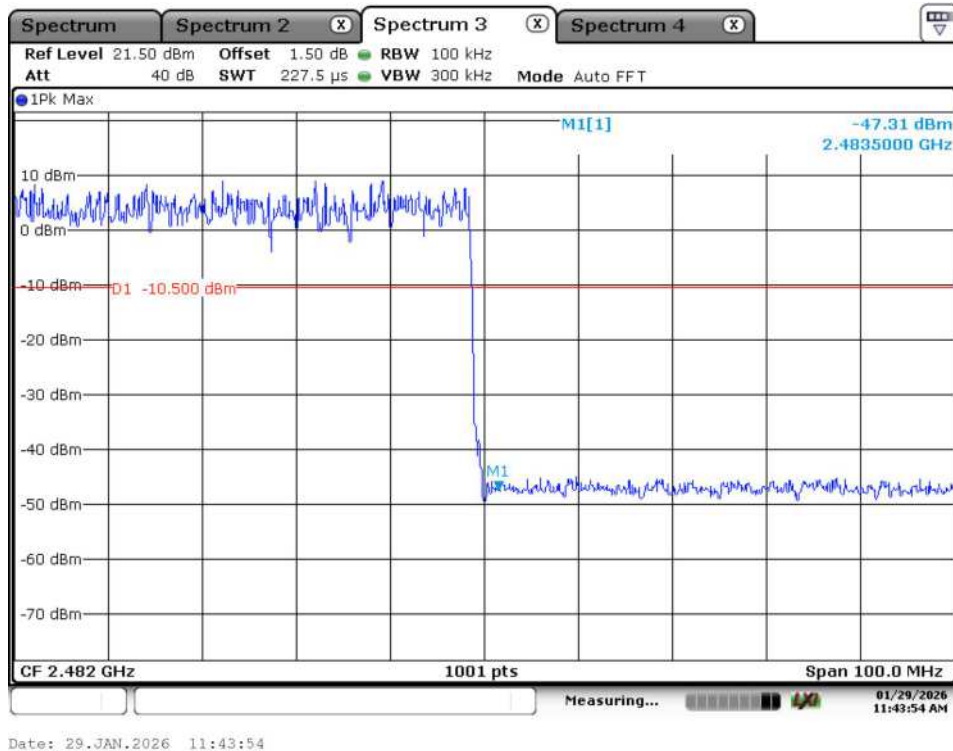


Appendix B.8: Test Results of Radiated Spurious Emissions

Note: 1. Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported. 2. This testing was carried out on different modulations, but only the worst case (GFSK) was presented in this report.

30MHz - 1GHz

EUT Information

EUT Name:	Bluetooth Speaker
Model:	PARTYBOX 330T
Test Mode:	BR DH5_Mid channel
Order No/Sample No:	A004189323-002
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

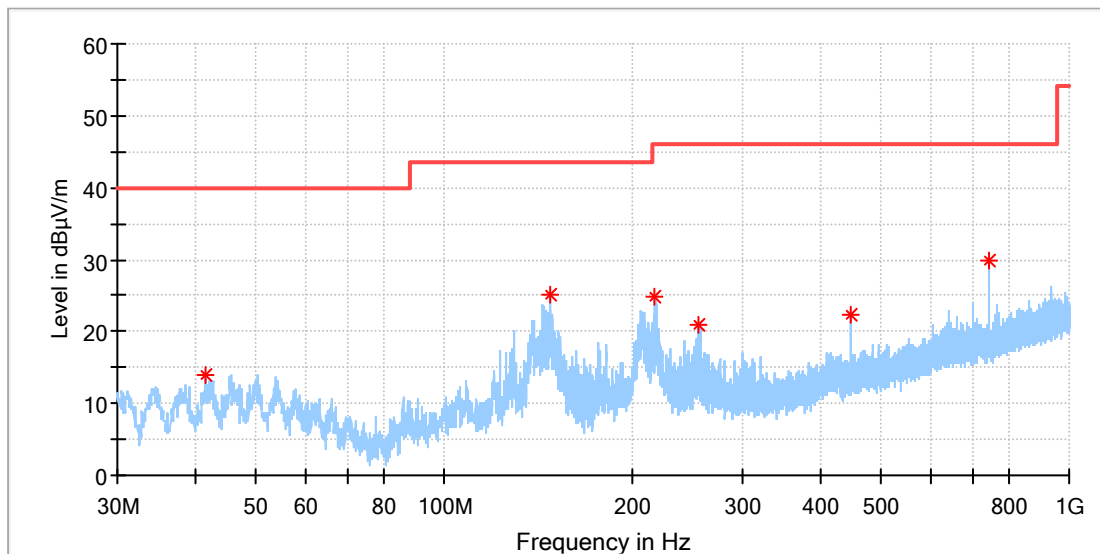


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
41.532222	14.07	40.00	25.93	100.0	H	278.0	-19.8
147.477778	25.07	43.50	18.43	100.0	H	89.0	-22.3
217.695000	24.73	46.00	21.27	100.0	H	195.0	-18.7
255.471111	20.94	46.00	25.06	100.0	H	342.0	-17.2
447.962222	22.30	46.00	23.70	100.0	H	58.0	-12.8
742.518889	29.78	46.00	16.22	100.0	H	112.0	-7.2

EUT Information

EUT Name:	Bluetooth Speaker
Model:	PARTYBOX 330T
Test Mode:	BR DH5_Mid channel
Order No/Sample No:	A004189323-002
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

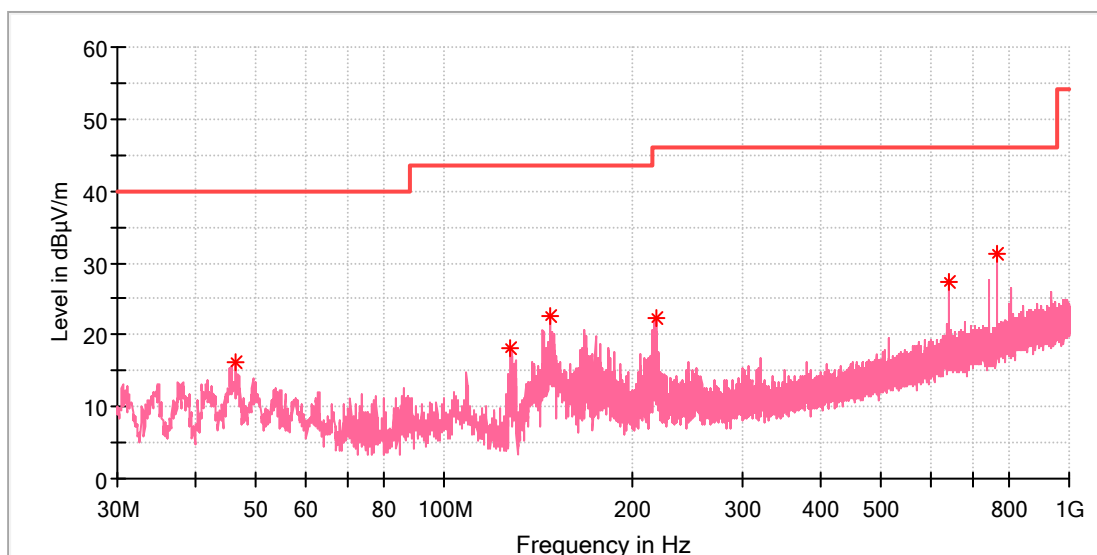

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
46.274444	16.07	40.00	23.93	100.0	V	163.0	-18.7
127.970000	18.04	43.50	25.46	100.0	V	163.0	-21.7
147.693333	22.54	43.50	20.96	100.0	V	228.0	-22.3
217.964444	22.45	46.00	23.55	100.0	V	211.0	-18.7
639.968333	27.46	46.00	18.54	100.0	V	12.0	-9.0
767.900556	31.14	46.00	14.86	100.0	V	63.0	-6.7

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	Bluetooth Speaker
Model:	PARTYBOX 330T
Test Mode:	BR DH5_Low channel
Order No/Sample No:	A004189323-002
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

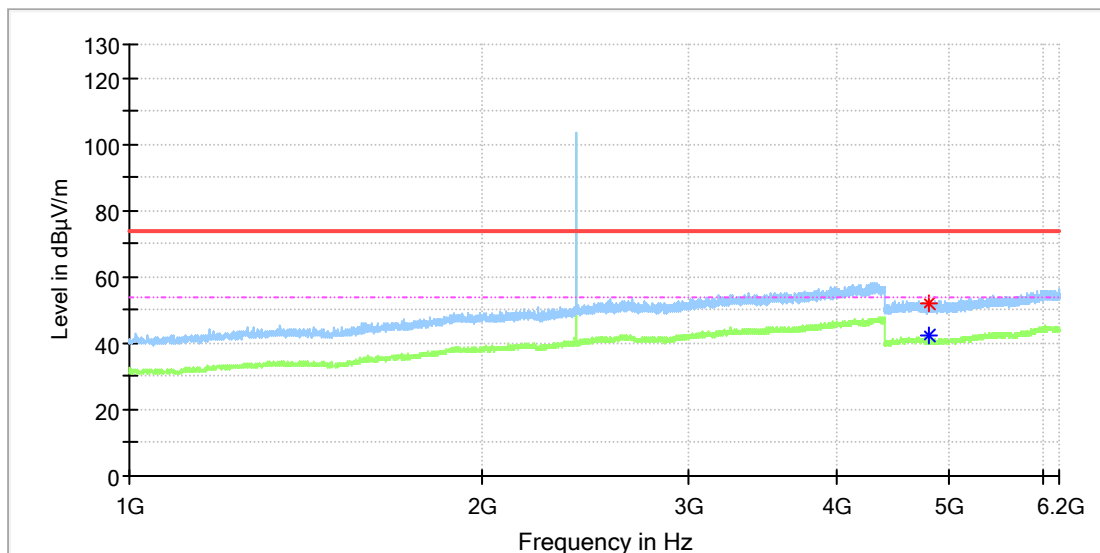


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4802.500000	52.04	---	74.00	21.96	150.0	H	319.0	13.3
4804.000000	---	42.29	54.00	11.71	150.0	H	351.0	13.3

EUT Information

EUT Name: Bluetooth Speaker
Model: PARTYBOX 330T
Test Mode: BR DH5_Low channel
Order No/Sample No: A004189323-002
Test Voltage:: 120V/60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

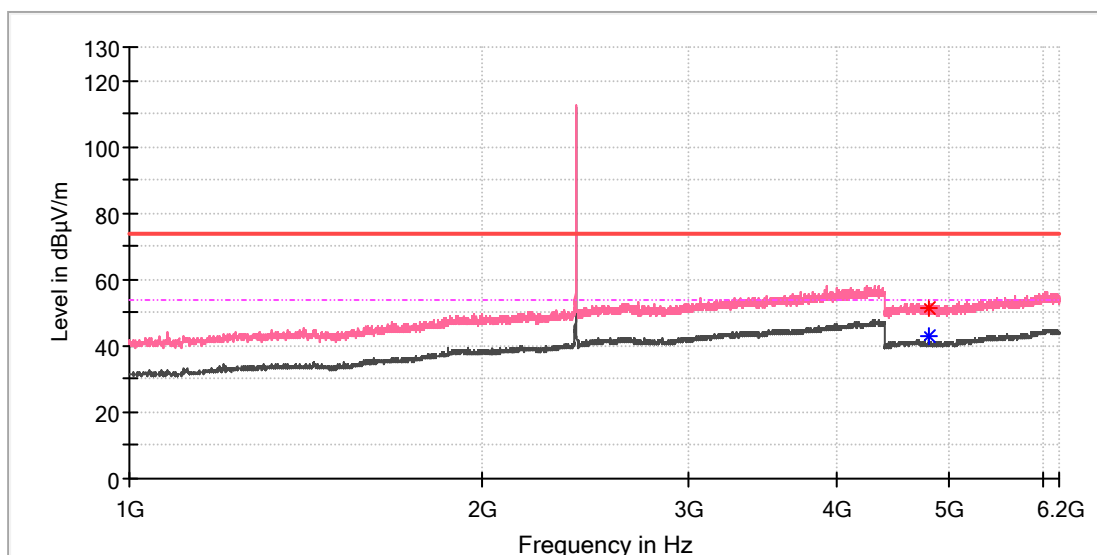


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4803.500000	51.53	---	74.00	22.47	150.0	V	223.0	13.3
4803.500000	---	42.66	54.00	11.34	150.0	V	223.0	13.3

EUT Information

EUT Name: Bluetooth Speaker
Model: PARTYBOX 330T
Test Mode: BR DH5_Mid channel
Order No/Sample No: A004189323-002
Test Voltage:: 120V/60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

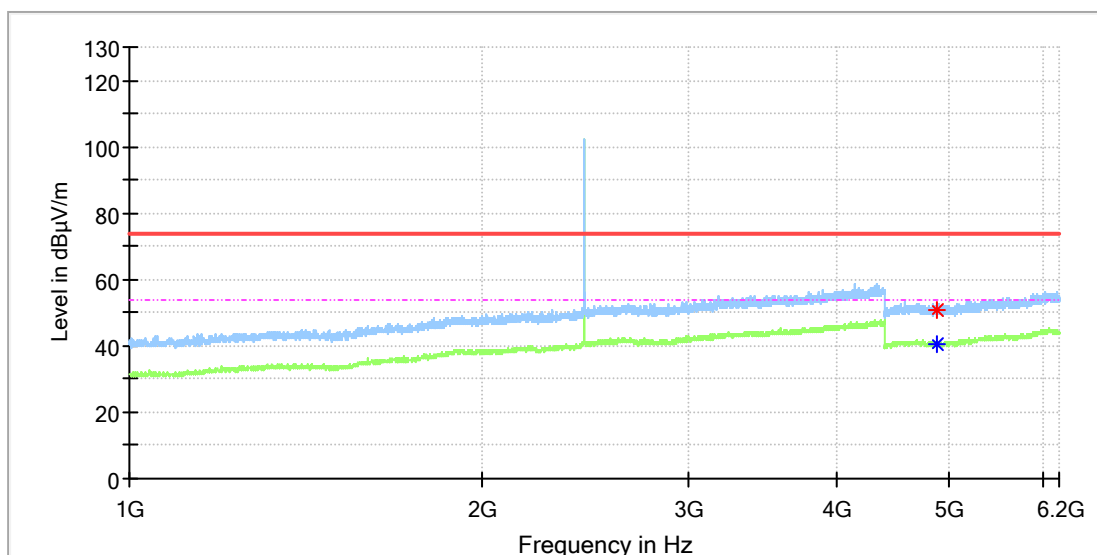


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4881.500000	---	40.73	54.00	13.27	150.0	H	299.0	13.3
4883.000000	51.08	---	74.00	22.92	150.0	H	240.0	13.3

EUT Information

EUT Name: Bluetooth Speaker
Model: PARTYBOX 330T
Test Mode: BR DH5_Mid channel
Order No/Sample No: A004189323-002
Test Voltage:: 120V/60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

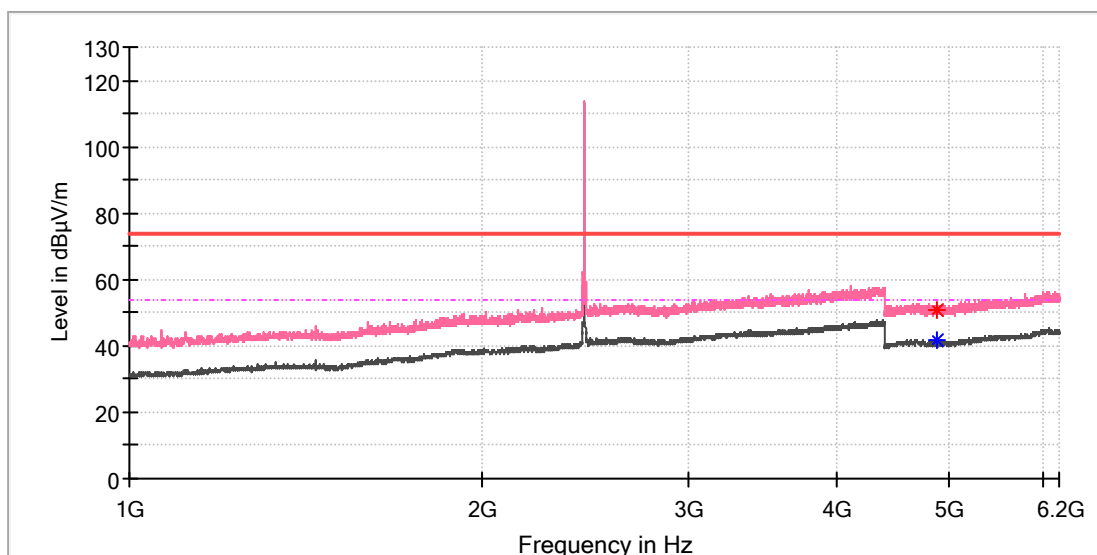


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4882.000000	50.77	---	74.00	23.23	150.0	V	327.0	13.3
4882.000000	---	41.63	54.00	12.37	150.0	V	327.0	13.3

EUT Information

EUT Name:	Bluetooth Speaker
Model:	PARTYBOX 330T
Test Mode:	BR DH5_High channel
Order No/Sample No:	A004189323-002
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

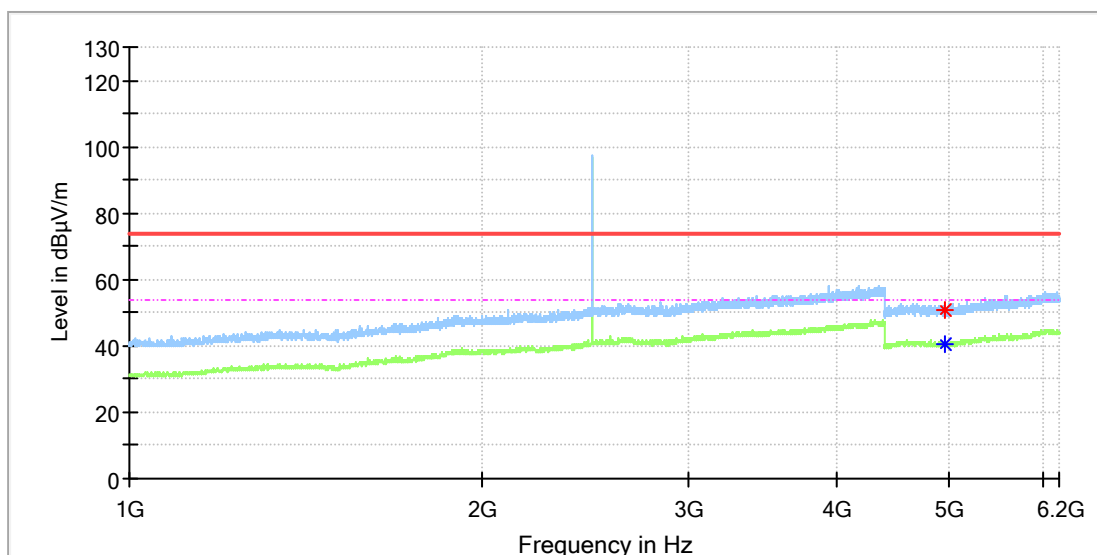


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4961.000000	---	40.75	54.00	13.25	150.0	H	309.0	13.3
4961.000000	51.03	---	74.00	22.97	150.0	H	309.0	13.3

EUT Information

EUT Name:	Bluetooth Speaker
Model:	PARTYBOX 330T
Test Mode:	BR DH5_High channel
Order No/Sample No:	A004189323-002
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

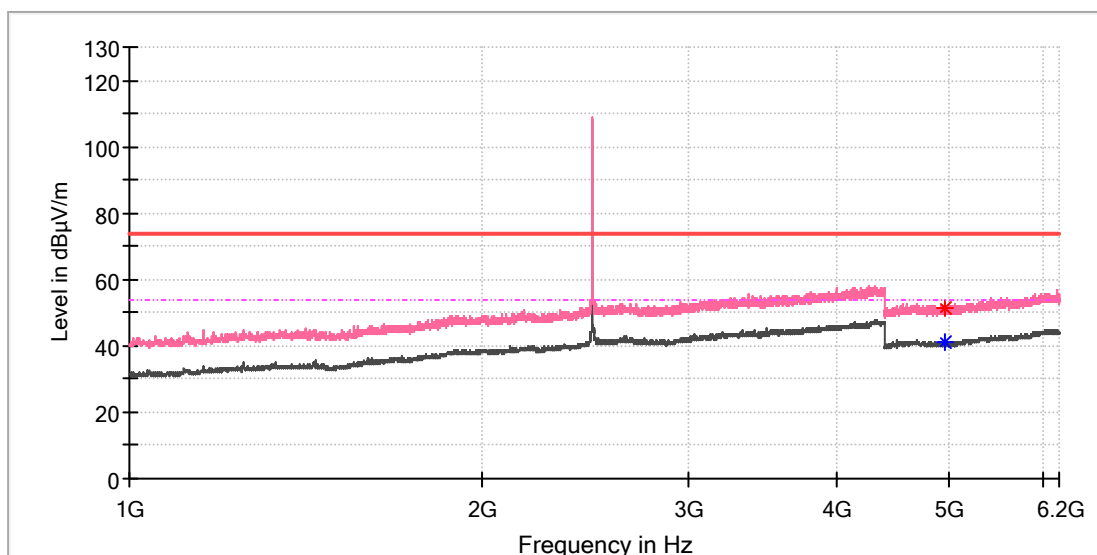


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4960.000000	---	41.34	54.00	12.66	150.0	V	326.0	13.3
4961.000000	51.18	---	74.00	22.82	150.0	V	197.0	13.3

EUT Information

EUT Name: Bluetooth Speaker
Model: PARTYBOX 330T
Test Mode: BR DH5_Low channel
Order No/Sample No: A004189323-002
Test Voltage:: 120V/60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

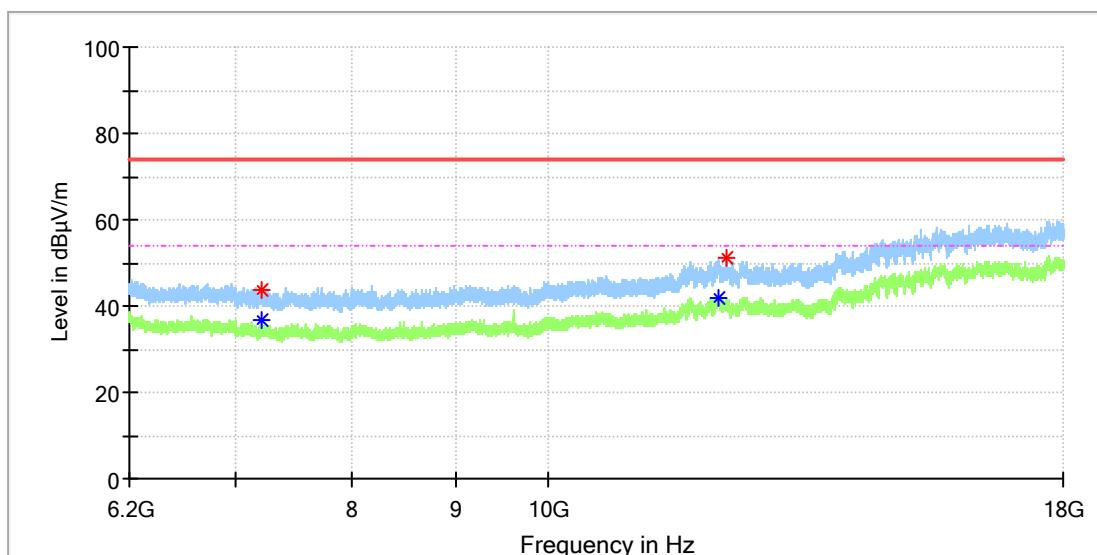


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.950000	---	36.53	54.00	17.47	150.0	H	149.0	8.8
7207.425000	43.67	---	74.00	30.33	150.0	H	127.0	8.8
12143.758333	---	41.66	54.00	12.34	150.0	H	83.0	16.6
12255.366667	51.10	---	74.00	22.90	150.0	H	6.0	16.1

EUT Information

EUT Name: Bluetooth Speaker
Model: PARTYBOX 330T
Test Mode: BR DH5_Low channel
Order No/Sample No: A004189323-002
Test Voltage:: 120V/60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

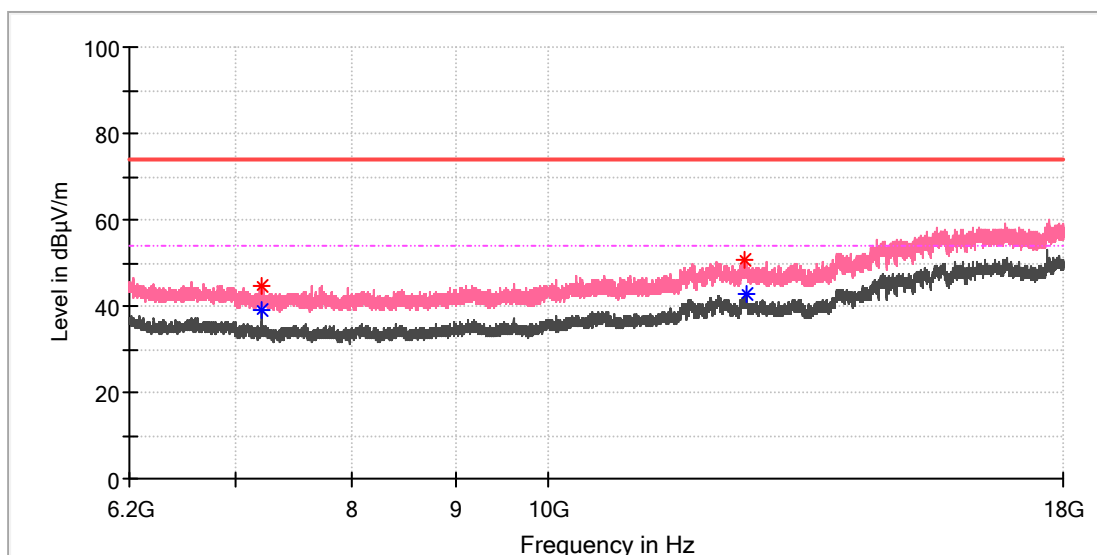


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.458333	---	38.85	54.00	15.15	150.0	V	239.0	8.8
7205.950000	44.78	---	74.00	29.22	150.0	V	251.0	8.8
12524.308333	50.86	---	74.00	23.14	150.0	V	239.0	16.3
12536.108333	---	42.86	54.00	11.14	150.0	V	103.0	16.4

EUT Information

EUT Name: Bluetooth Speaker
Model: PARTYBOX 330T
Test Mode: BR DH5_Mid channel
Order No/Sample No: A004189323-002
Test Voltage:: 120V/60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

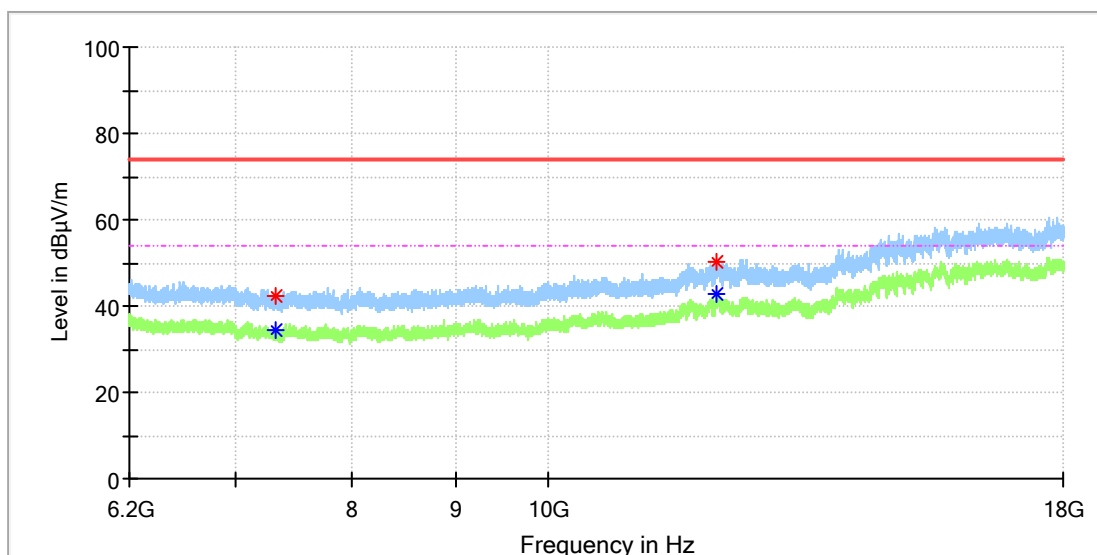


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7321.983333	---	34.64	54.00	19.37	150.0	H	328.0	8.2
7330.341667	42.47	---	74.00	31.53	150.0	H	69.0	8.1
12125.075000	---	42.63	54.00	11.37	150.0	H	69.0	16.1
12126.550000	50.42	---	74.00	23.58	150.0	H	69.0	16.1

EUT Information

EUT Name: Bluetooth Speaker
Model: PARTYBOX 330T
Test Mode: BR DH5_Mid channel
Order No/Sample No: A004189323-002
Test Voltage:: 120V/60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

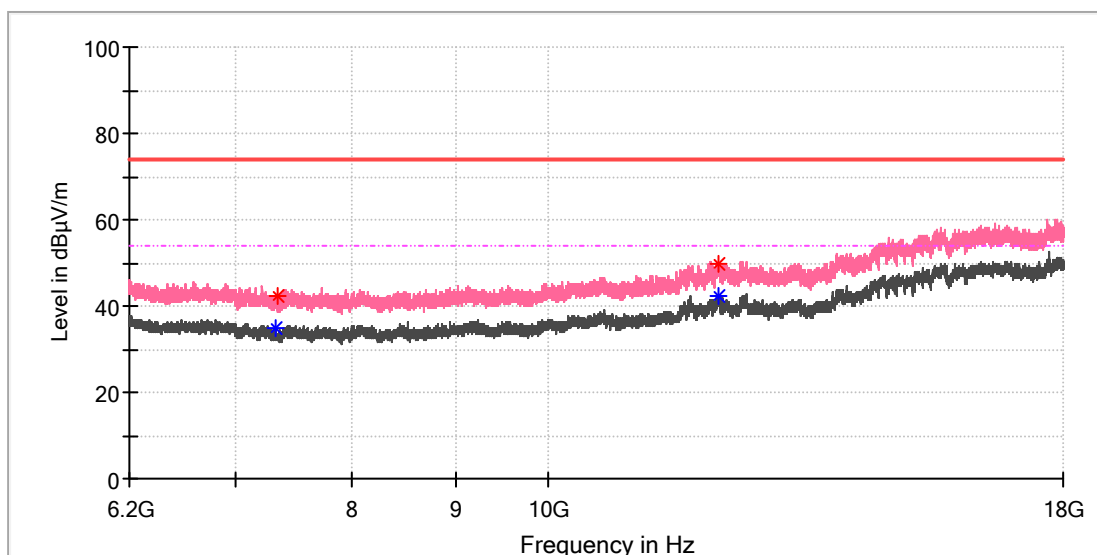


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7320.016667	---	34.74	54.00	19.26	150.0	V	85.0	8.2
7337.225000	42.46	---	74.00	31.54	150.0	V	257.0	8.1
12133.433333	49.81	---	74.00	24.19	150.0	V	44.0	16.3
12140.316667	---	42.27	54.00	11.73	150.0	V	68.0	16.5

EUT Information

EUT Name:	Bluetooth Speaker
Model:	PARTYBOX 330T
Test Mode:	BR DH5_High channel
Order No/Sample No:	A004189323-002
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

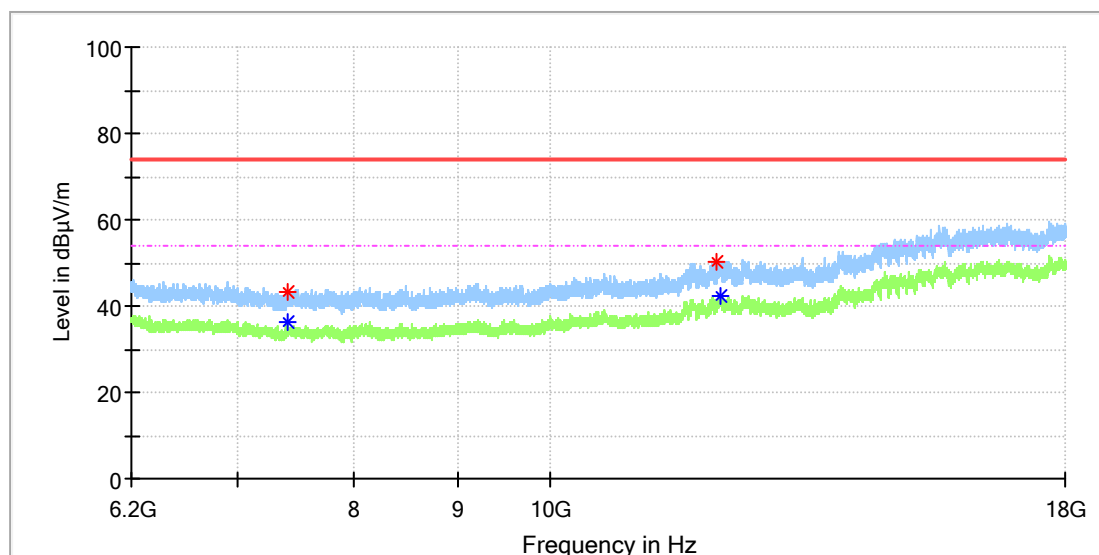


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7417.858333	---	36.40	54.00	17.60	150.0	H	343.0	8.4
7417.858333	43.40	---	74.00	30.60	150.0	H	343.0	8.4
12103.933333	50.43	---	74.00	23.57	150.0	H	294.0	15.5
12146.216667	---	42.31	54.00	11.69	150.0	H	100.0	16.6

EUT Information

EUT Name:	Bluetooth Speaker
Model:	PARTYBOX 330T
Test Mode:	BR DH5_High channel
Order No/Sample No:	A004189323-002
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

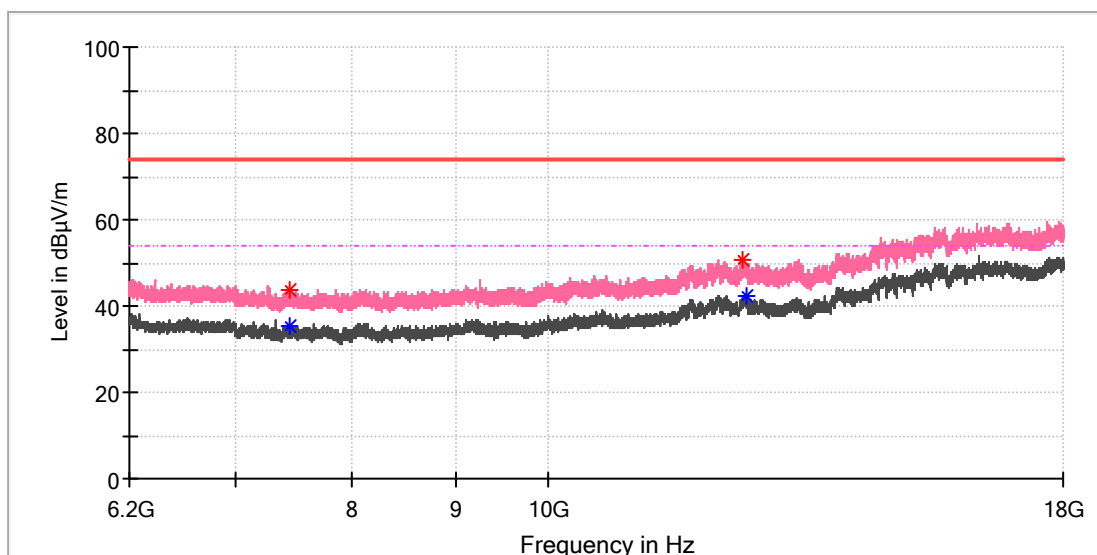


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7438.016667	---	35.49	54.00	18.51	150.0	V	274.0	8.4
7452.766667	43.90	---	74.00	30.10	150.0	V	0.0	8.5
12489.400000	50.88	---	74.00	23.12	150.0	V	171.0	16.0
12538.075000	---	42.35	54.00	11.65	150.0	V	80.0	16.4

Appendix B.9: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name: Bluetooth Speaker
Model: PARTYBOX 330T
Test Mode: BR DH5_Low channel
Order No./Sample No: A004189323-002
Test Voltage:: 120V/60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

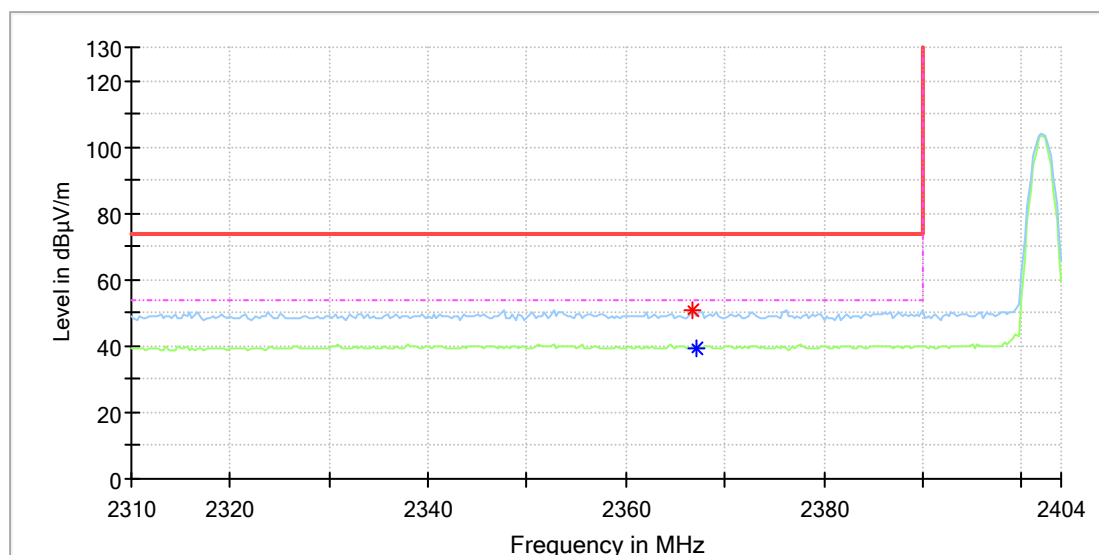


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2366.764706	51.04	---	74.00	22.96	150.0	H	159.0	8.5

EUT Information

EUT Name:	Bluetooth Speaker
Model:	PARTYBOX 330T
Test Mode:	BR DH5_Low channel
Order No/Sample No:	A004189323-002
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

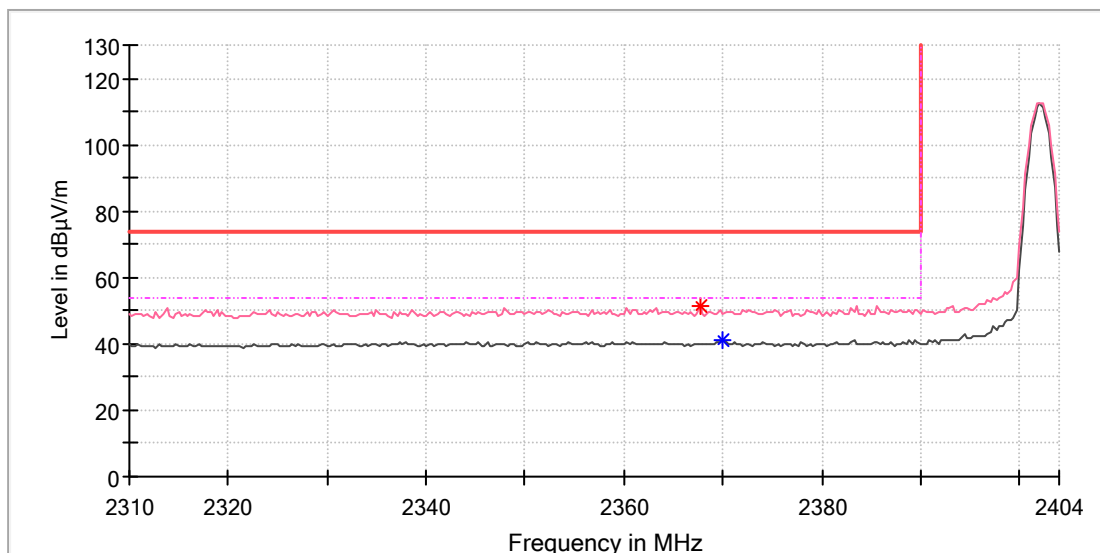


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2367.647059	51.35	---	74.00	22.65	150.0	V	68.0	8.5
2370.000000	---	41.03	54.00	12.97	150.0	V	236.0	8.5

EUT Information

EUT Name:	Bluetooth Speaker
Model:	PARTYBOX 330T
Test Mode:	BR DH5_High channel
Order No/Sample No:	A004189323-002
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

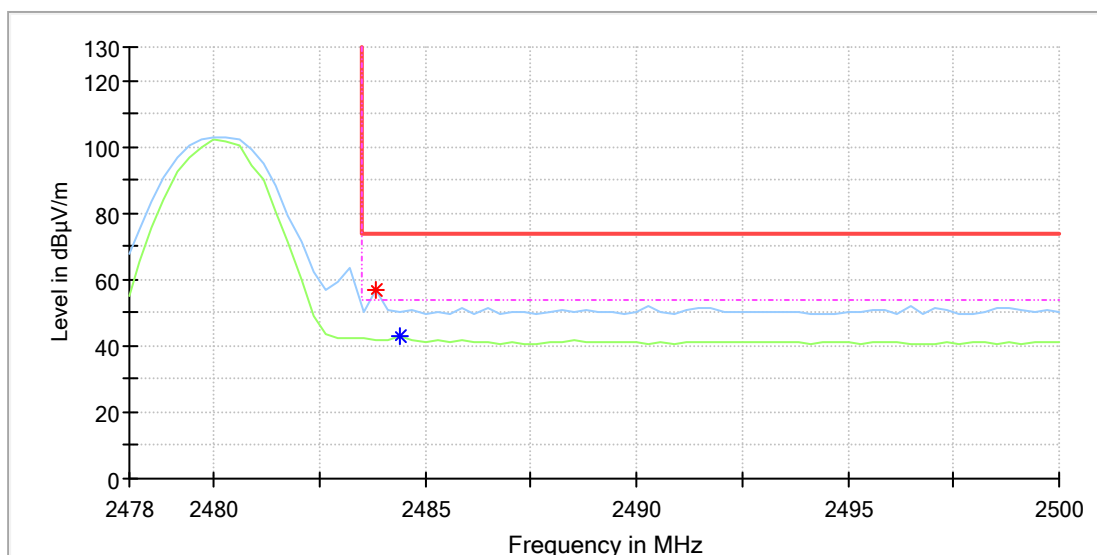


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.823529	57.03	---	74.00	16.97	150.0	H	118.0	9.0
2484.411765	---	42.83	54.00	11.17	150.0	H	255.0	9.0

EUT Information

EUT Name: Bluetooth Speaker
Model: PARTYBOX 330T
Test Mode: BR DH5_High channel
Order No/Sample No: A004189323-002
Test Voltage:: 120V/60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

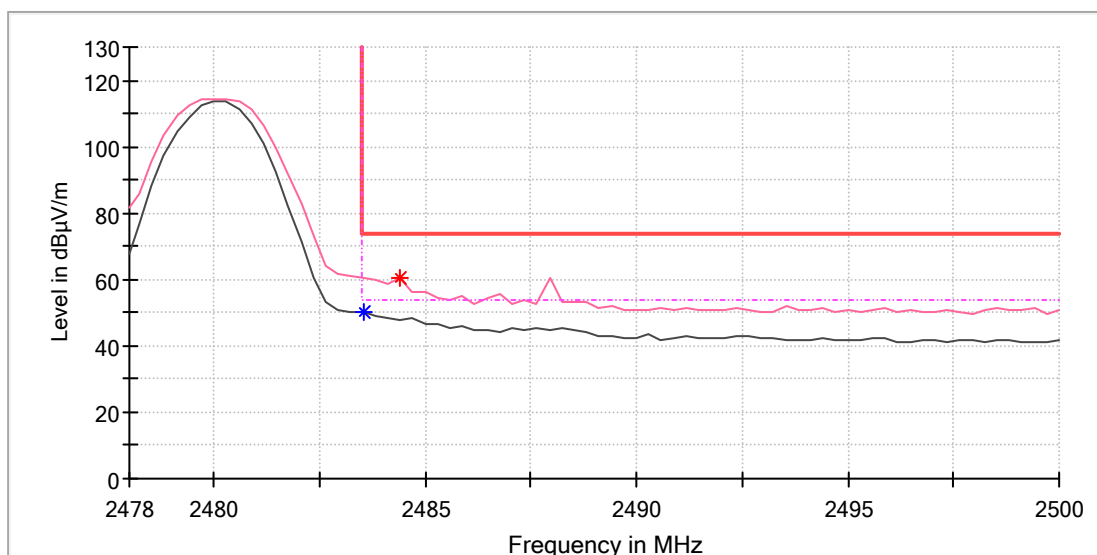


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.529412	---	50.18	54.00	3.82	150.0	V	233.0	9.0
2484.411765	60.77	---	74.00	13.23	150.0	V	233.0	9.0

Appendix B.10: Test Results of Conducted Emissions on AC Mains

EUT Information

EUT Name:	Bluetooth Speaker
Model:	PARTYBOX 330T
Test Mode:	Bluetooth Playing + USB-C load + multi
Test Voltage:	AC 120V/60Hz
Test Standard:	EN 55032
Test By:/Review By:	Dawn Shen / Charlie Zha
Tem./Hum./Pressure:	24.0°C/49.3%/101kPa
Remark:	SR 3

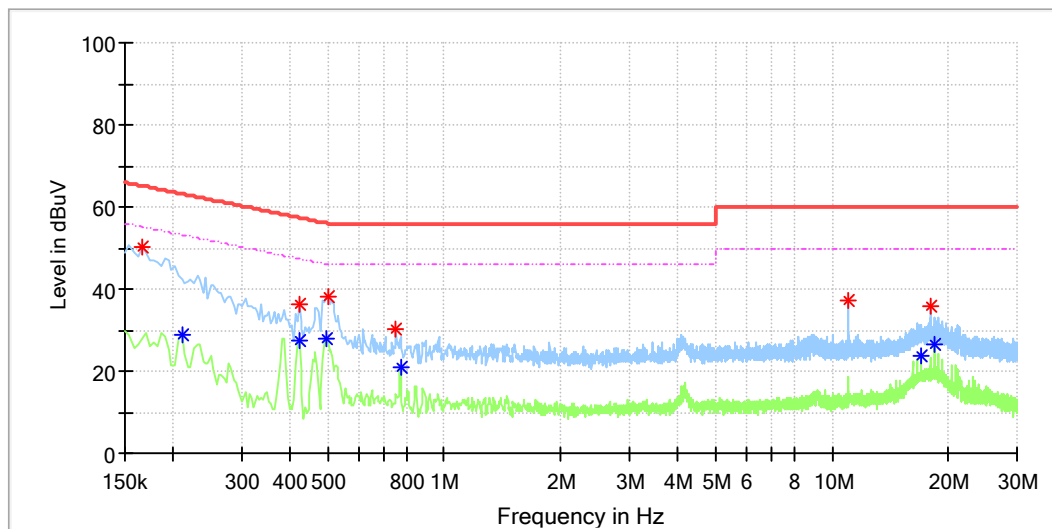


Critical Freqs

Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.166	50.2	---	65.16	14.95	L1	9.6
0.210	---	29.1	53.21	24.15	L1	9.7
0.422	36.1	---	57.41	21.29	L1	9.5
0.422	---	27.3	47.41	20.12	L1	9.5
0.498	---	28.0	46.03	18.05	L1	9.5
0.502	37.9	---	56.00	18.05	L1	9.5
0.750	30.0	---	56.00	25.99	L1	9.7
0.770	---	20.9	46.00	25.14	L1	9.7
10.998	37.3	---	60.00	22.74	L1	9.9
16.898	---	23.8	50.00	26.24	L1	9.6
17.998	35.7	---	60.00	24.26	L1	9.7
18.434	---	26.3	50.00	23.68	L1	9.7

EUT Information

EUT Name:	Bluetooth Speaker
Model:	PARTYBOX 330T
Test Mode:	Bluetooth Playing + USB-C load + multi
Test Voltage:	AC 120V/60Hz
Test Standard:	EN 55032
Test By:/Review By:	Dawn Shen / Charlie Zha
Tem./Hum./Pressure:	24.0°C/49.3%/101kPa
Remark:	SR 3

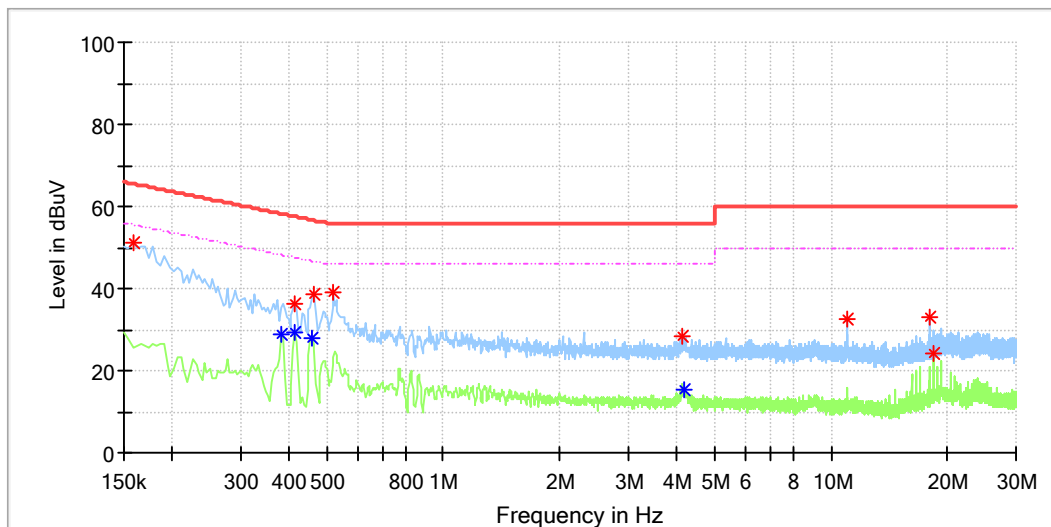

Critical Freqs

Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.158	51.3	---	65.57	14.28	N	9.8
0.382	---	28.7	48.24	19.51	N	9.9
0.414	---	29.4	47.57	18.15	N	9.9
0.414	36.4	---	57.57	21.13	N	9.9
0.458	---	28.1	46.73	18.62	N	9.9
0.466	38.7	---	56.59	17.93	N	9.9
0.522	39.0	---	56.00	17.01	N	9.9
4.150	28.5	---	56.00	27.50	N	9.7
4.166	---	15.5	46.00	30.54	N	9.7
11.002	32.5	---	60.00	27.47	N	9.7
18.002	33.2	---	60.00	26.78	N	9.7
18.390	24.0	---	60.00	36.00	N	9.7