Mode	22	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	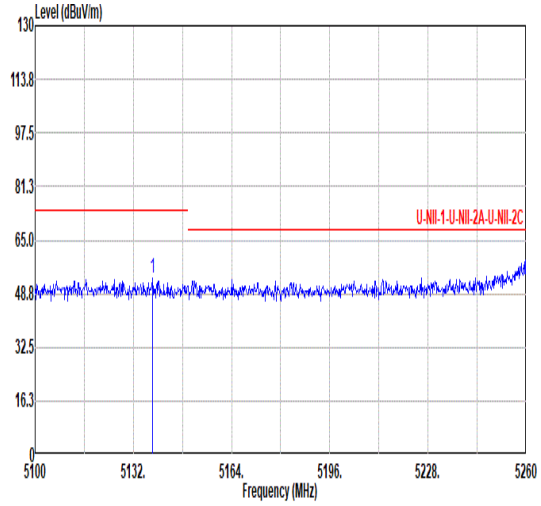 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5138.24 53.27 74.00 -20.73 45.66 34.01 10.60 37.00 0.00 317 39 PEAK	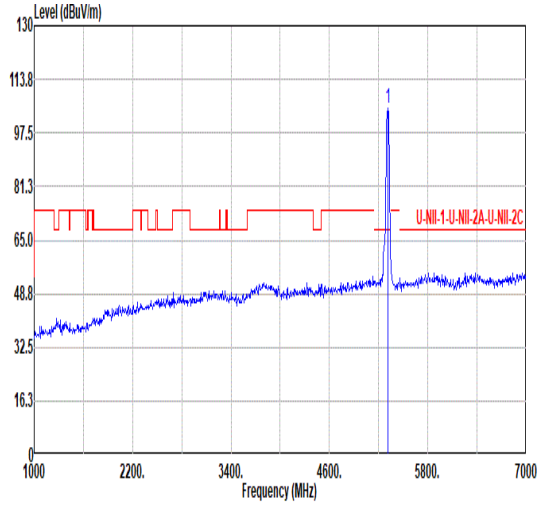 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5310.00 104.97 ------ ------ 96.54 34.31 10.73 36.61 0.00 317 39 PEAK
Avg	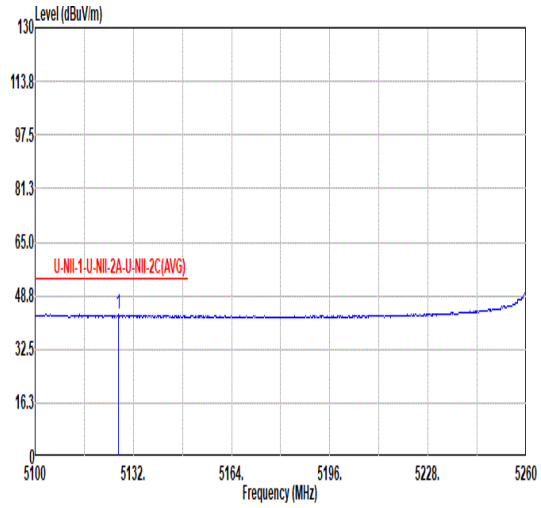 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5127.04 43.06 54.00 -10.94 35.47 33.98 10.58 36.97 0.00 317 39 AVERAGE	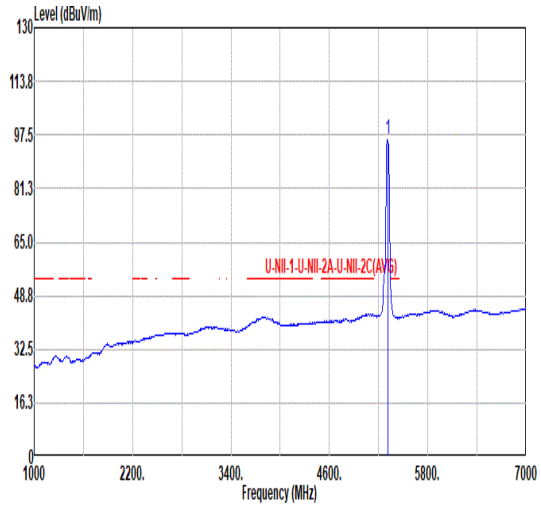 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5310.00 96.11 ------ ------ 87.70 34.31 10.72 36.62 0.00 317 39 AVERAGE

Mode	22	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	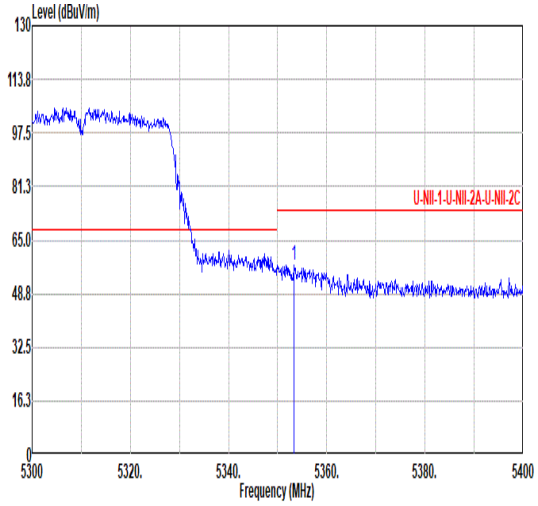 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.30 57.41 74.00 -16.59 48.82 34.35 10.75 36.51 0.00 317 39 PEAK	Blank
Avg	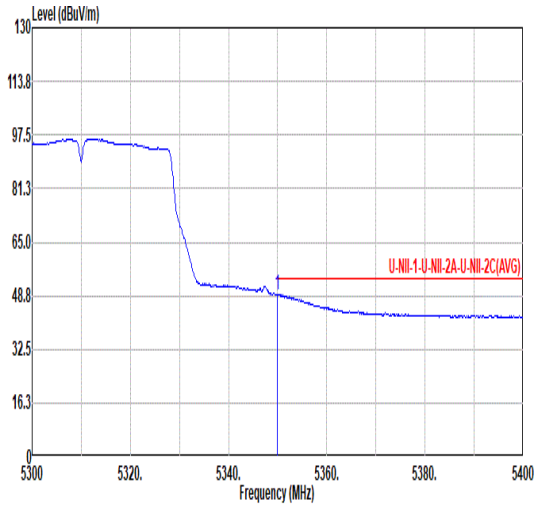 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.00 49.26 54.00 -4.74 40.68 34.35 10.75 36.52 0.00 317 39 AVERAGE	Blank

Mode	22	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak Avg	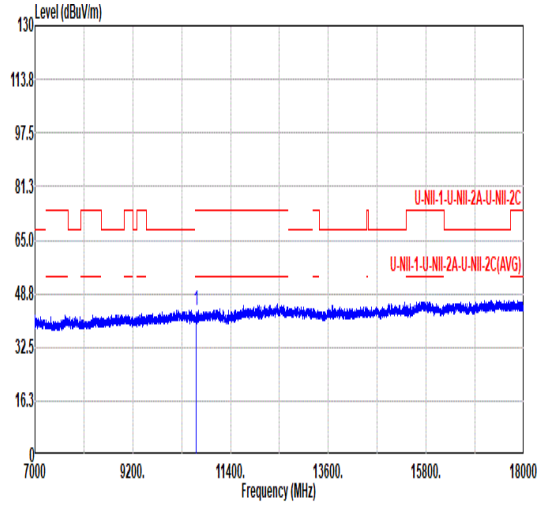 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10620.00 43.47 74.00 -30.53 57.22 37.53 15.69 66.97 0.00 --- --- PEAK	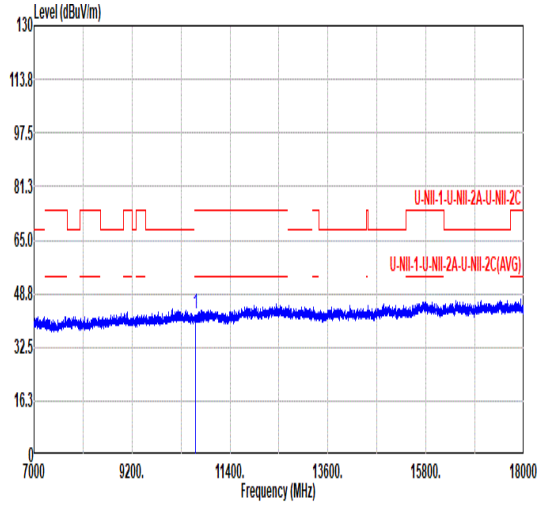 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10620.00 42.83 74.00 -31.17 56.58 37.53 15.69 66.97 0.00 --- --- PEAK

Mode	23	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz	
ANT	3	
Pol.	Horizontal	Fundamental
Peak	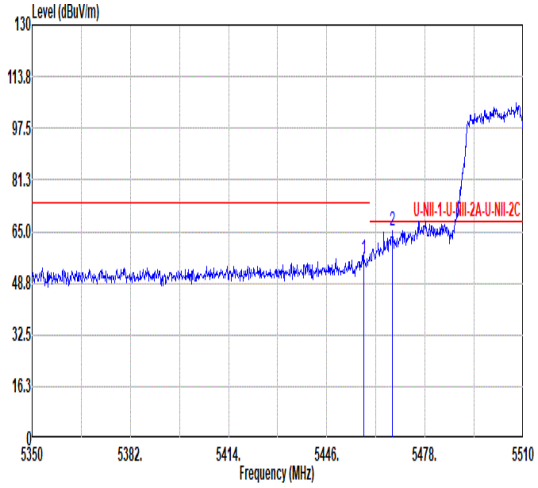 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.00 56.24 74.00 -17.76 47.50 34.34 10.84 36.44 0.00 289 360 PEAK 2 5467.44 65.13 68.20 -3.07 56.40 34.33 10.85 36.45 0.00 289 360 Peak	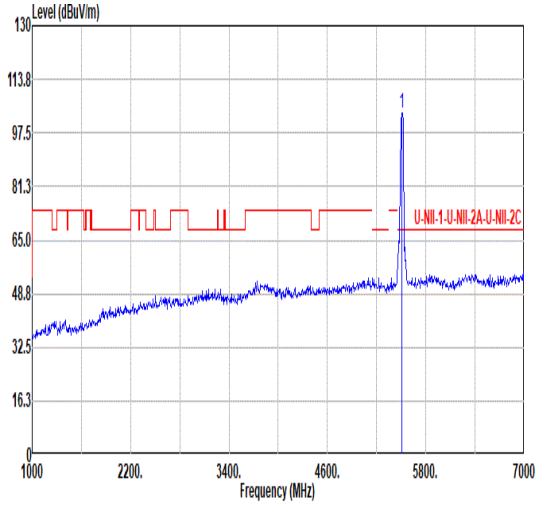 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 103.71 ------ ------ 94.89 34.34 10.91 36.43 0.00 289 360 PEAK
Avg	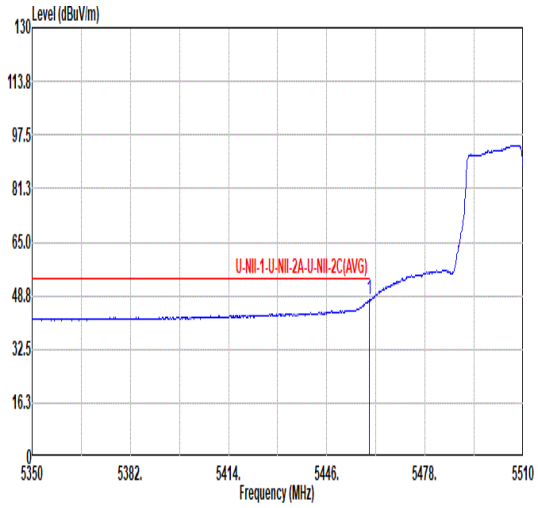 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.76 47.37 54.00 -6.63 38.63 34.34 10.84 36.44 0.00 289 360 AVERAGE	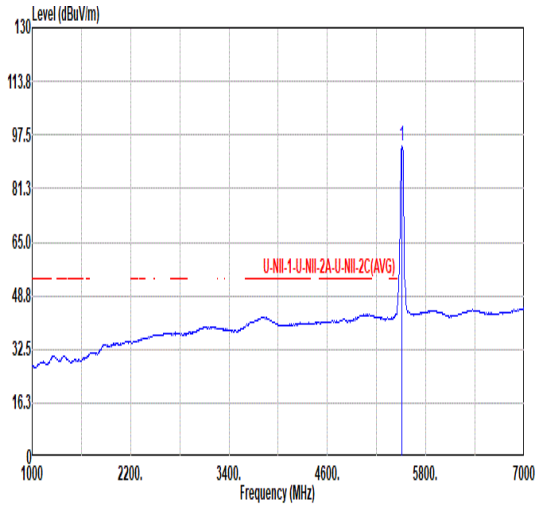 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 94.13 ------ ------ 85.39 34.31 10.89 36.46 0.00 289 360 AVERAGE

Mode	23	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz	
ANT	3	
Pol.	Horizontal	Fundamental
Peak	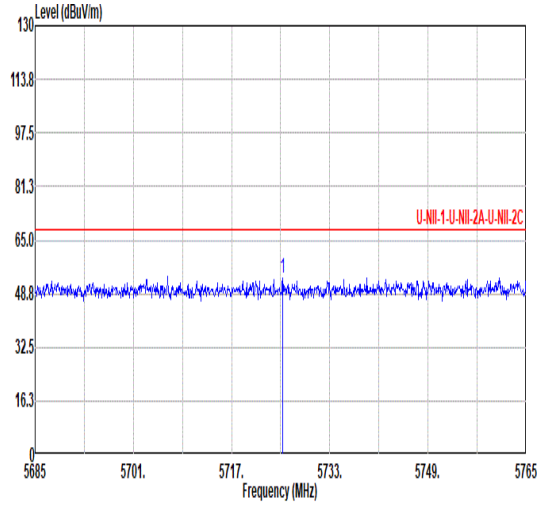	Blank

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5725.32	53.47	68.20	-14.73	44.26	34.43	11.18	36.40	0.00	289	360	PEAK

Mode	23	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	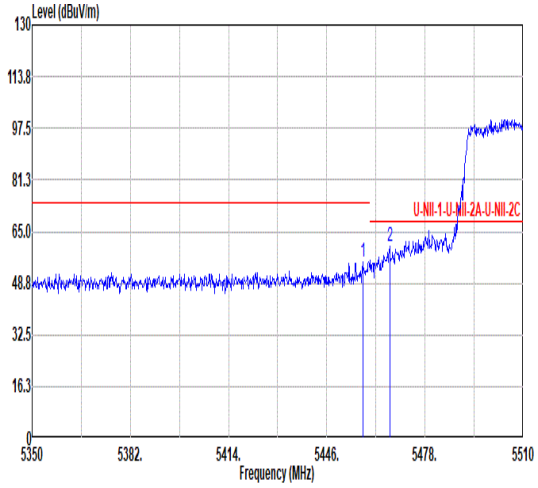 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5457.68 55.59 74.00 -18.41 46.85 34.34 10.84 36.44 0.00 130 316 PEAK 2 5466.48 60.27 68.20 -7.93 51.54 34.33 10.85 36.45 0.00 130 316 PEAK	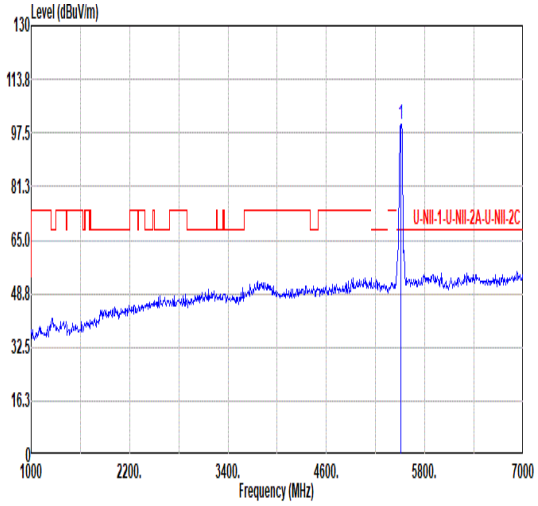 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 100.23 ------ ------ 91.45 34.32 10.90 36.44 0.00 130 316 PEAK
Avg	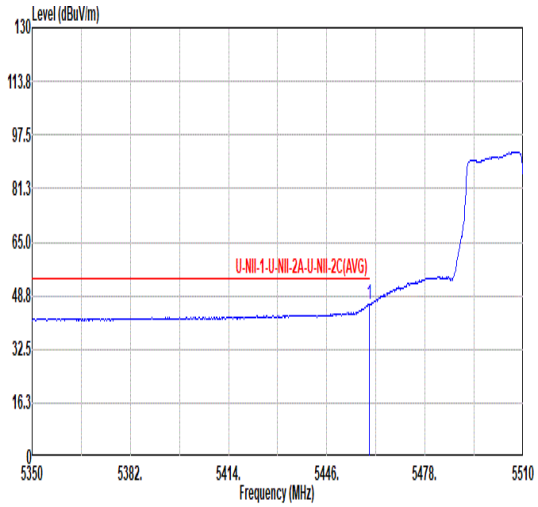 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.92 46.03 54.00 -7.97 37.29 34.34 10.84 36.44 0.00 130 316 AVERAGE	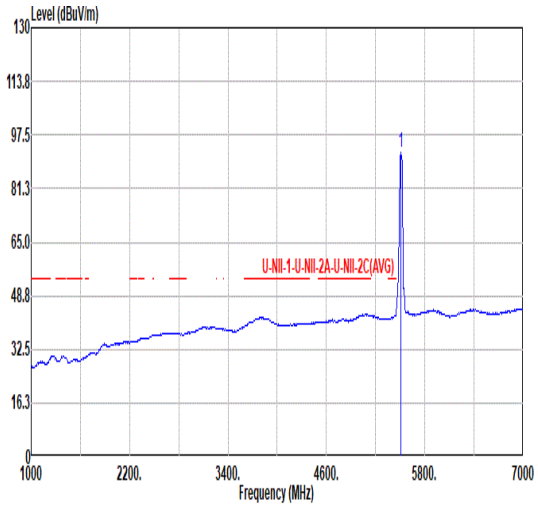 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 92.12 ------ ------ 83.34 34.32 10.90 36.44 0.00 130 316 AVERAGE

Mode	23	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	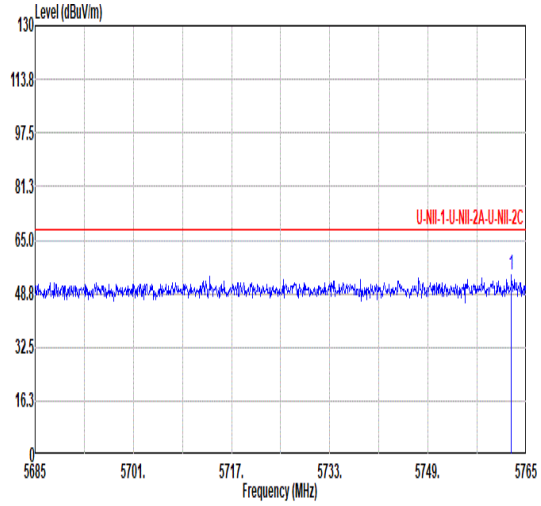 Freq / Level / Limit Line / Over Limit / Read Level / Ant Factor / Cable Loss / Preamp Factor / Aux Factor / APos / TPos / Remark MHz / dBuV/m / dBuV/m / dB / dBuV / dB/m / dB / dB / dB / cm / deg 1 5762.60 54.40 68.20 -13.80 45.02 34.61 11.23 36.46 0.00 130 316 PEAK	Blank

Mode	23	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak Avg	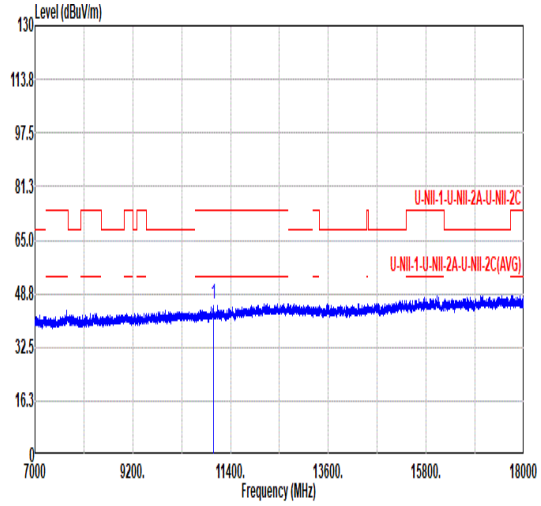 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11020.00 45.63 74.00 -28.37 58.38 37.82 16.06 66.63 0.00 --- --- PEAK	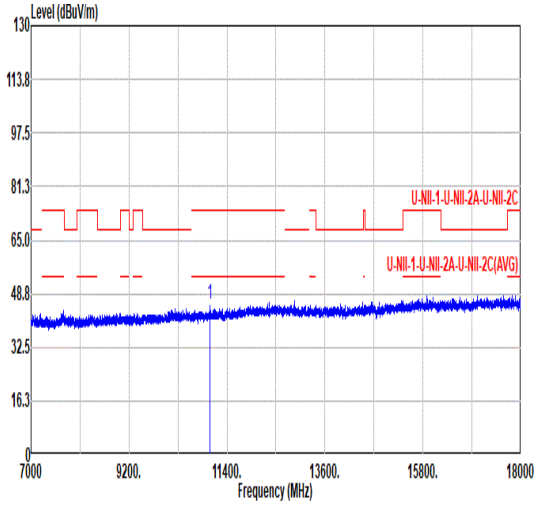 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11020.00 45.79 74.00 -28.21 58.54 37.82 16.06 66.63 0.00 --- --- PEAK

Mode	24	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak Avg	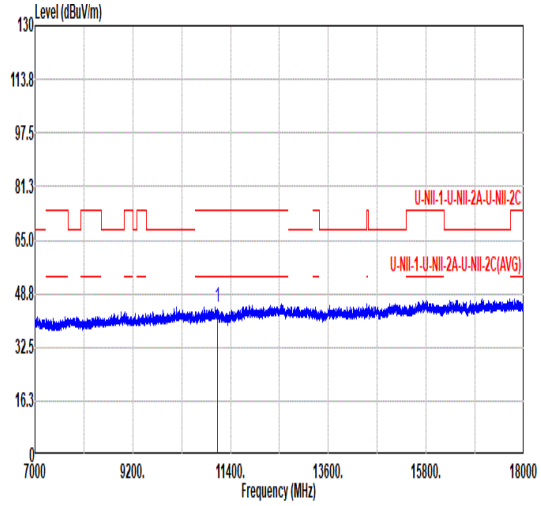 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11100.00 44.78 74.00 -29.22 57.40 37.89 16.11 66.62 0.00 --- --- PEAK	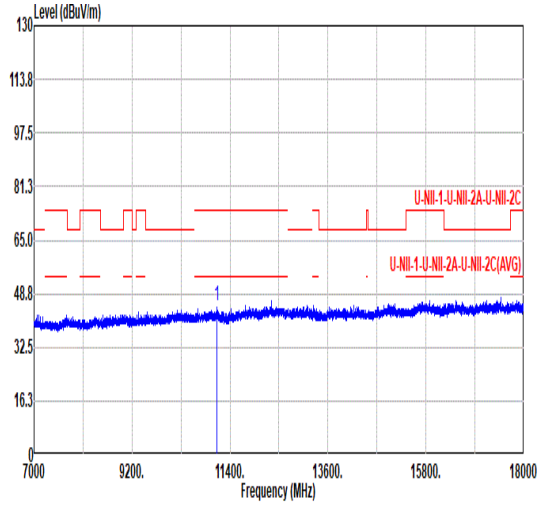 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11100.00 45.19 74.00 -28.81 57.81 37.89 16.11 66.62 0.00 --- --- PEAK

Mode	25	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz	
ANT	3	
Pol.	Horizontal	Fundamental
Peak	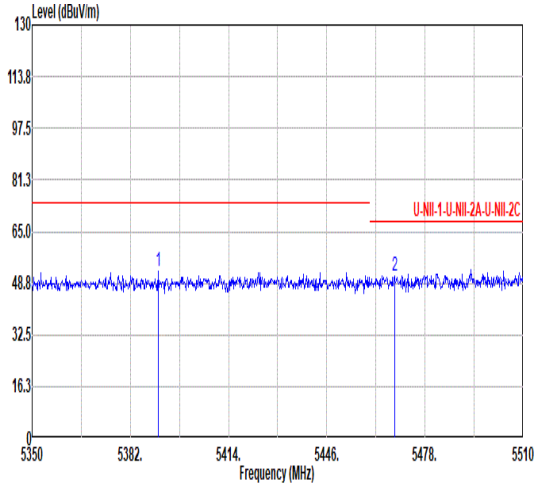 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5391.12 52.53 74.00 -21.47 43.79 34.39 10.77 36.42 0.00 351 0 PEAK 2 5468.08 51.09 68.20 -17.11 42.36 34.33 10.85 36.45 0.00 351 0 PEAK	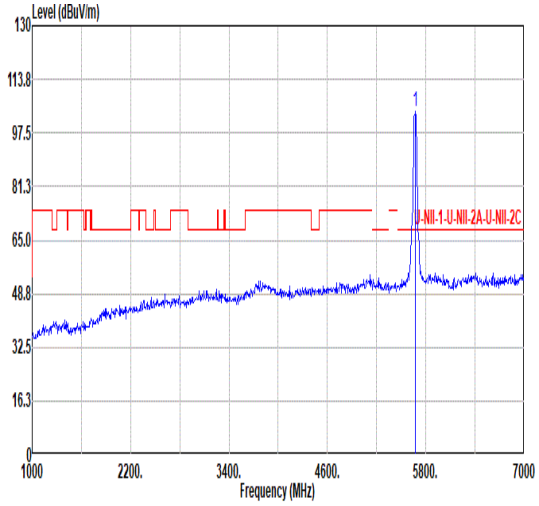 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 103.81 ------ ------ 94.68 34.35 11.11 36.33 0.00 351 0 PEAK
Avg	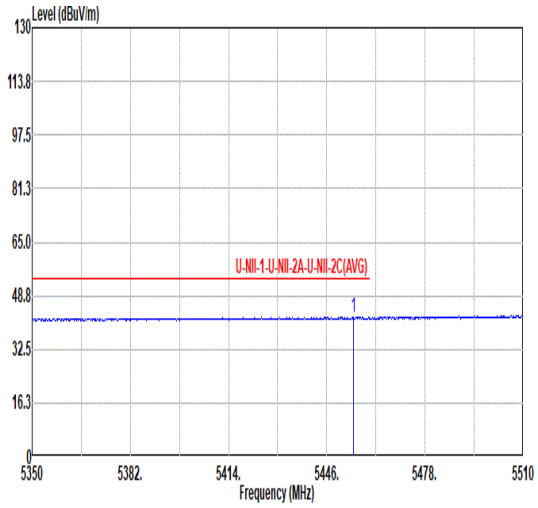 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5454.64 42.19 54.00 -11.81 33.45 34.35 10.83 36.44 0.00 351 0 AVERAGE	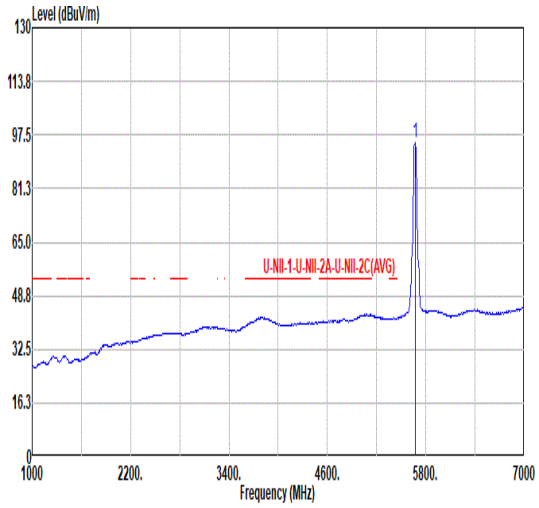 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 95.22 ------ ------ 86.08 34.36 11.10 36.32 0.00 351 0 AVERAGE

Mode	25	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz	
ANT	3	
Pol.	Horizontal	Fundamental
Peak	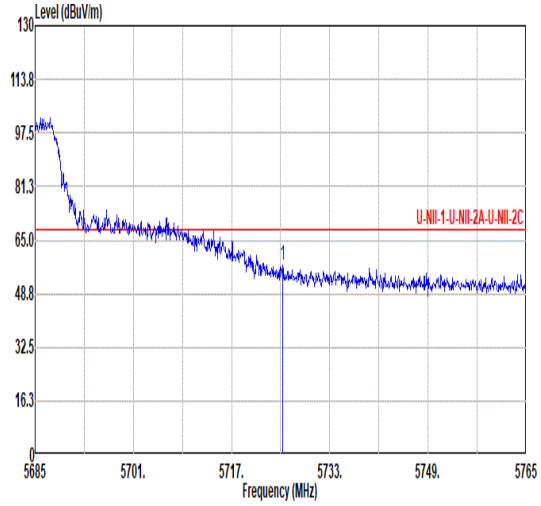 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5725.32 57.16 68.20 -11.04 47.95 34.43 11.18 36.40 0.00 351 0 PEAK	Blank

Mode	25	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	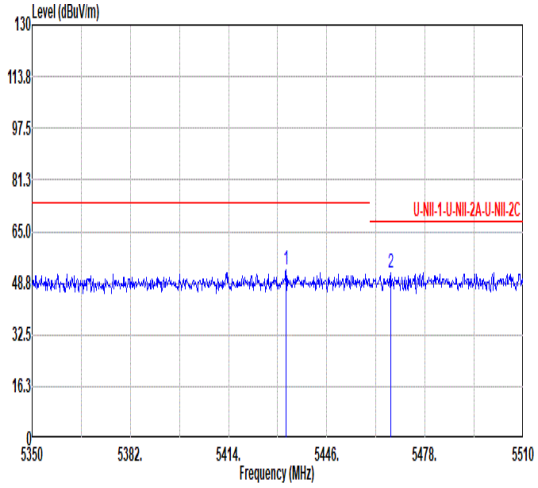 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5432.72 52.77 74.00 -21.23 44.01 34.37 10.81 36.42 0.00 121 347 PEAK 2 5466.96 51.78 68.20 -16.42 43.05 34.33 10.85 36.45 0.00 121 347 PEAK	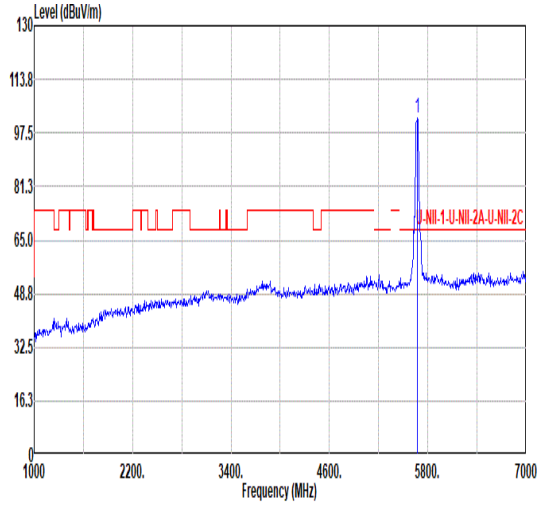 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 101.96 ------ ------ 92.83 34.35 11.11 36.33 0.00 121 347 PEAK
Avg	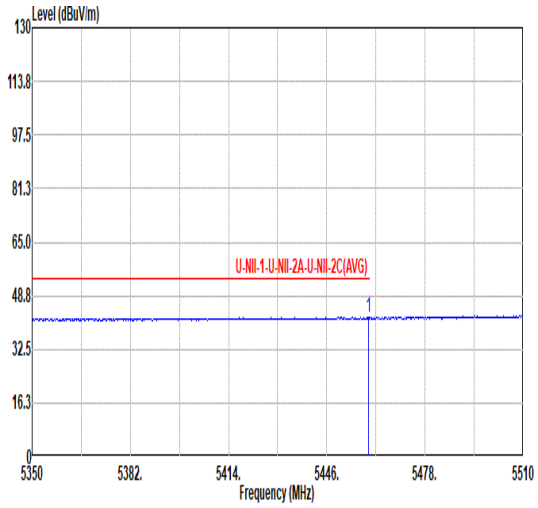 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.60 42.21 54.00 -11.79 33.47 34.34 10.84 36.44 0.00 121 347 AVERAGE	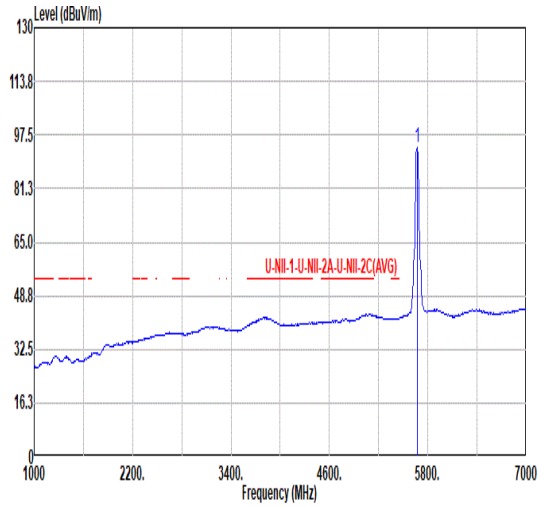 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 93.49 ------ ------ 84.35 34.36 11.10 36.32 0.00 121 347 AVERAGE

Mode	25	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	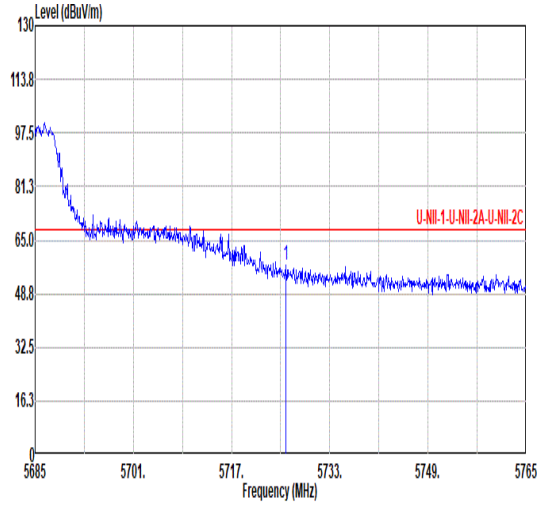 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5725.80 57.22 68.20 -10.98 48.01 34.43 11.18 36.40 0.00 121 347 PEAK	Blank

Mode	25	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak Avg	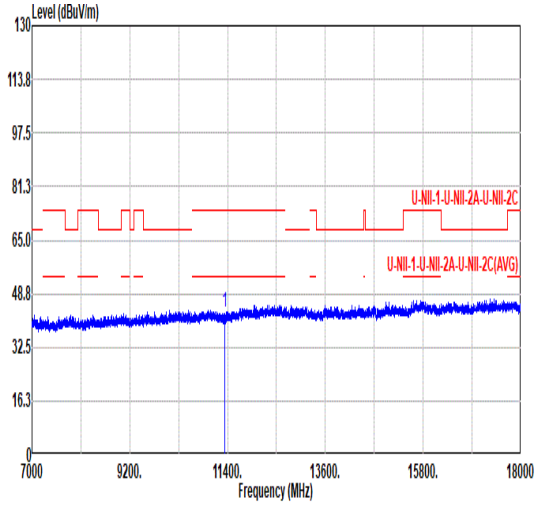 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11340.00 43.16 74.00 -30.84 55.39 38.11 16.26 66.60 0.00 --- --- PEAK	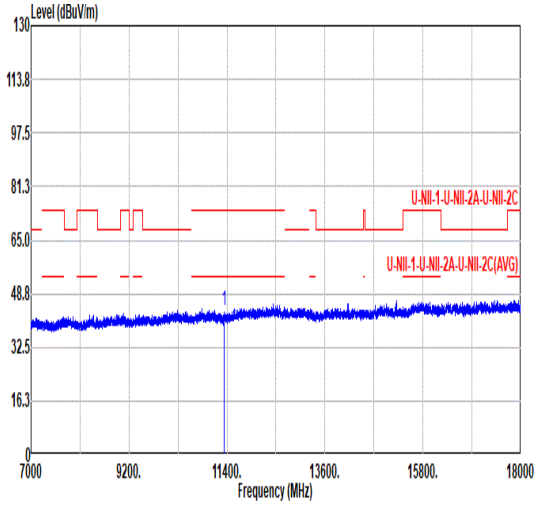 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11340.00 43.88 74.00 -30.12 56.11 38.11 16.26 66.60 0.00 --- --- PEAK

Mode	26	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz	
ANT	3	
Pol.	Horizontal	Fundamental
Peak	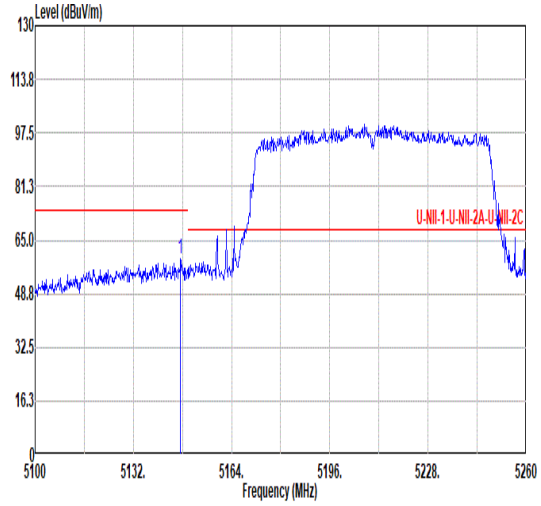 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.36 59.34 74.00 -14.66 51.71 34.04 10.61 37.02 0.00 294 0 PEAK	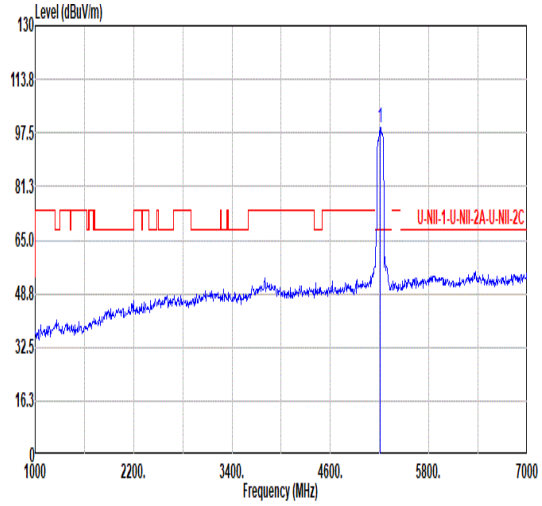 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 99.26 ------ ------ 91.44 34.22 10.67 37.07 0.00 294 0 PEAK
Avg	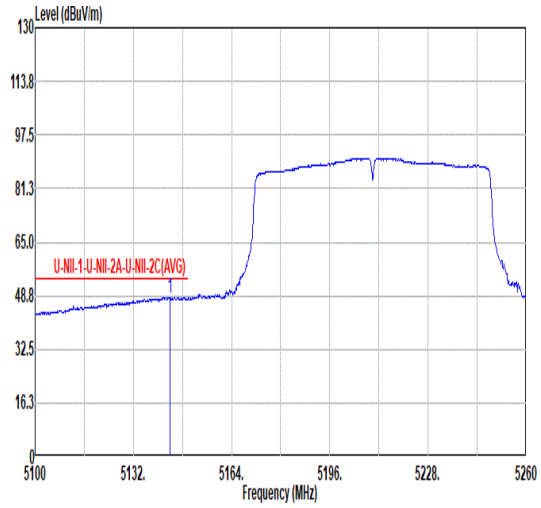 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5143.84 48.21 54.00 -5.79 40.59 34.03 10.60 37.01 0.00 294 0 AVERAGE	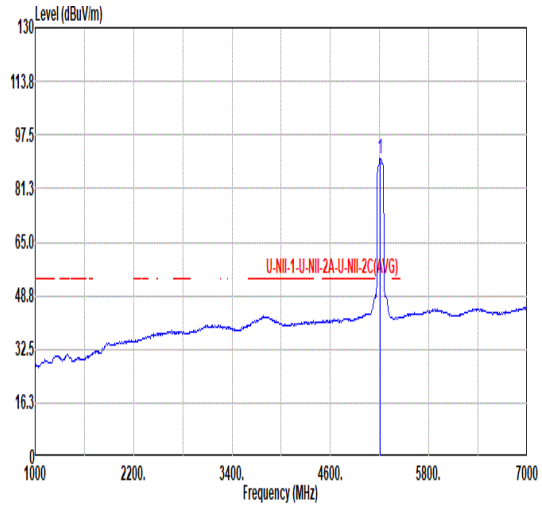 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 90.40 ------ ------ 82.58 34.22 10.67 37.07 0.00 294 0 AVERAGE

Mode	26	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz	
ANT	3	
Pol.	Horizontal	Fundamental
Peak	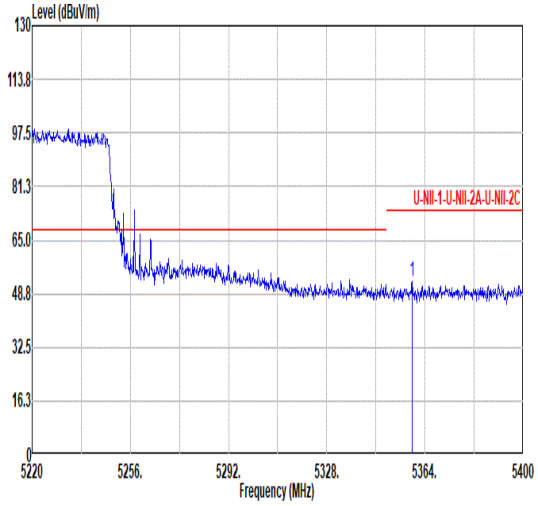 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5359.32 52.31 74.00 -21.69 43.70 34.36 10.75 36.50 0.00 294 0 PEAK	Blank
Avg	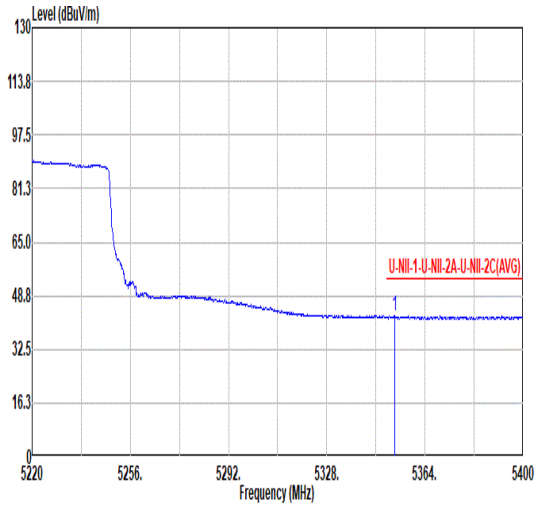 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.02 42.56 54.00 -11.44 33.97 34.35 10.75 36.51 0.00 294 0 AVERAGE	Blank

Mode	26	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	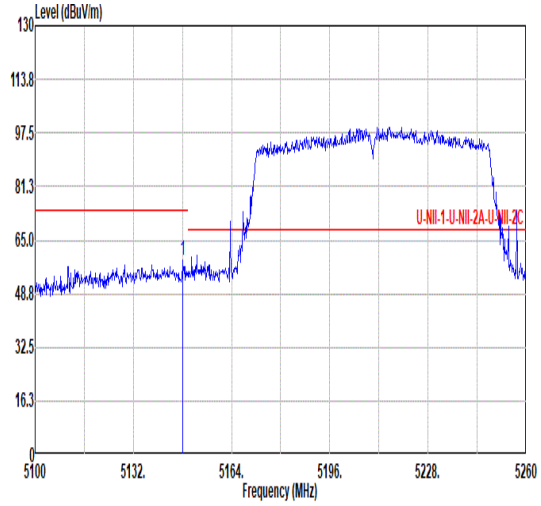 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.16 58.69 74.00 -15.31 51.07 34.04 10.61 37.03 0.00 380 57 PEAK	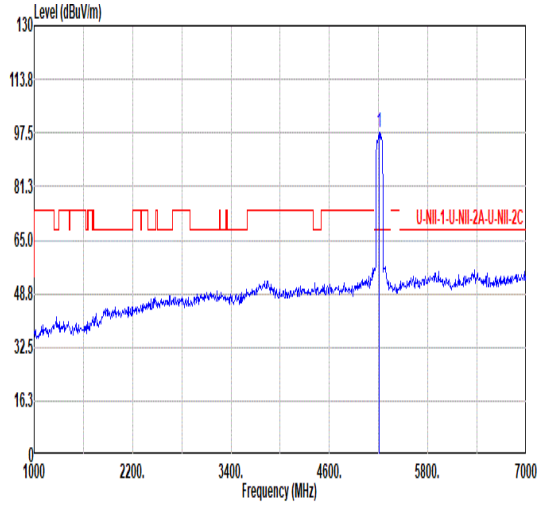 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 97.81 ------ ------ 89.99 34.22 10.67 37.07 0.00 380 57 PEAK
Avg	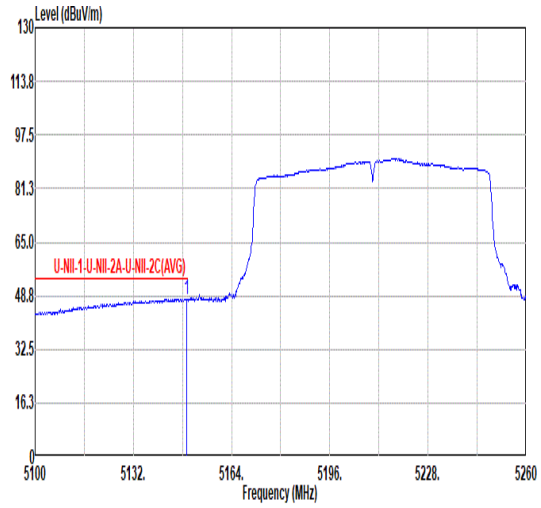 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.28 47.82 54.00 -6.18 40.19 34.05 10.61 37.03 0.00 380 57 AVERAGE	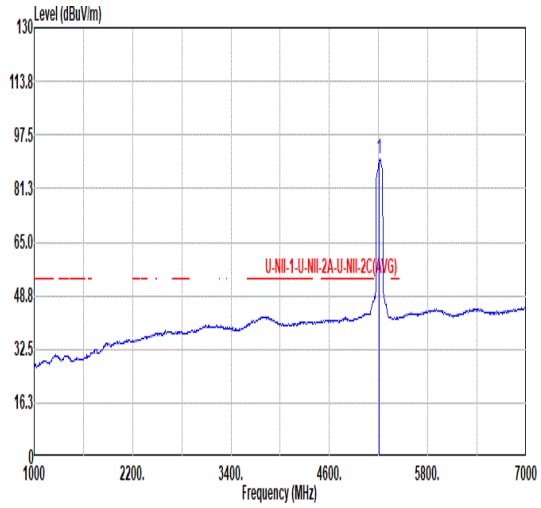 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 90.09 ------ ------ 82.27 34.22 10.67 37.07 0.00 380 57 AVERAGE

Mode	26	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	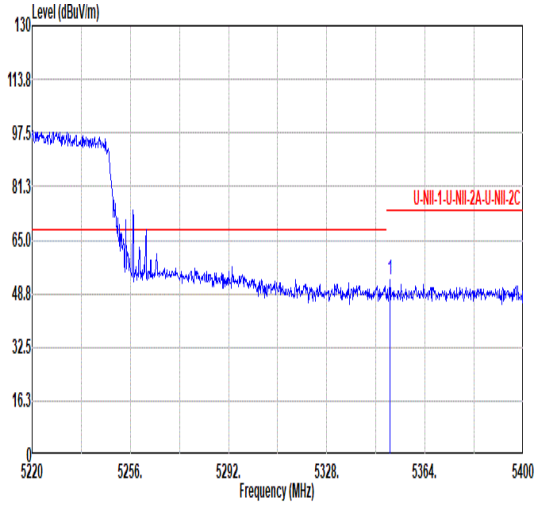 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.04 52.79 74.00 -21.21 44.21 34.35 10.75 36.52 0.00 380 57 PEAK	Blank
Avg	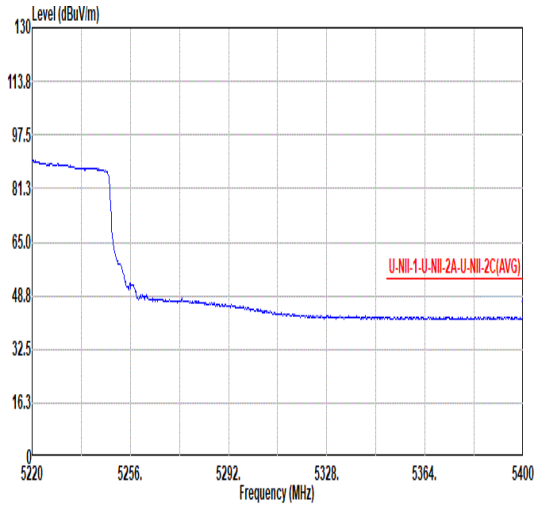 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5400.00 42.42 54.00 -11.58 33.64 34.40 10.78 36.40 0.00 380 57 AVERAGE	Blank

Mode	26	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak Avg	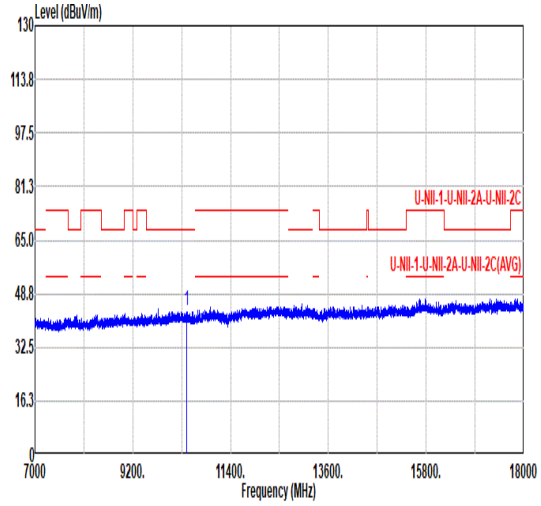 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10420.00 43.59 68.20 -24.61 57.70 37.42 15.54 67.07 0.00 --- --- PEAK	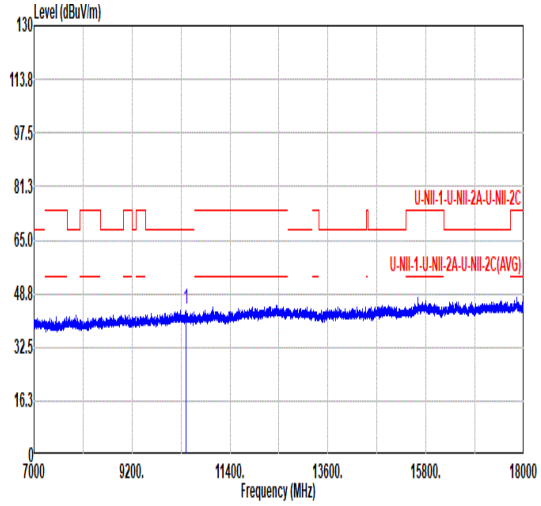 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10420.00 43.91 68.20 -24.29 58.06 37.40 15.51 67.06 0.00 --- --- PEAK

Mode	27	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz	
ANT	3	
Pol.	Horizontal	Fundamental
Peak	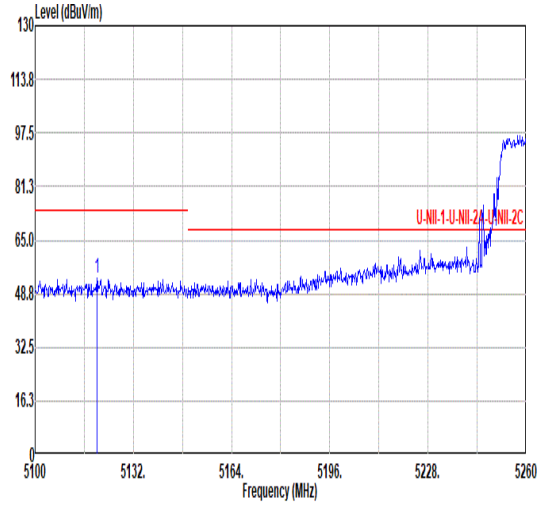 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5120.16 53.25 74.00 -20.75 45.66 33.96 10.58 36.95 0.00 287 0 PEAK	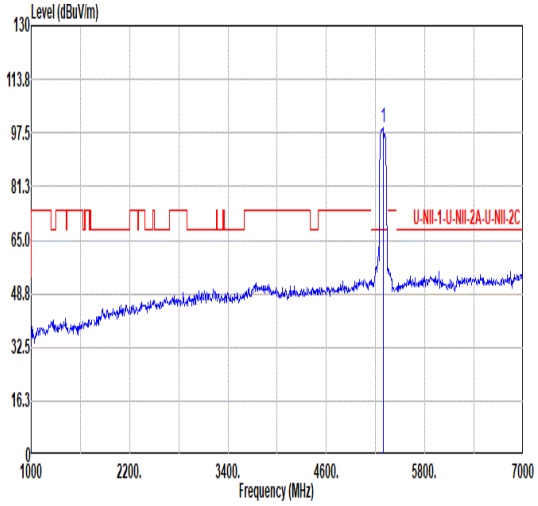 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 99.21 ------ ------ 90.90 34.29 10.71 36.69 0.00 287 0 PEAK
Avg	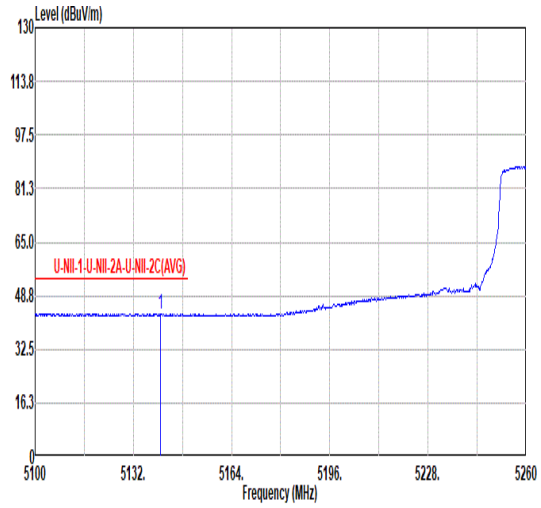 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5140.96 43.41 54.00 -10.59 35.80 34.02 10.60 37.01 0.00 287 0 AVERAGE	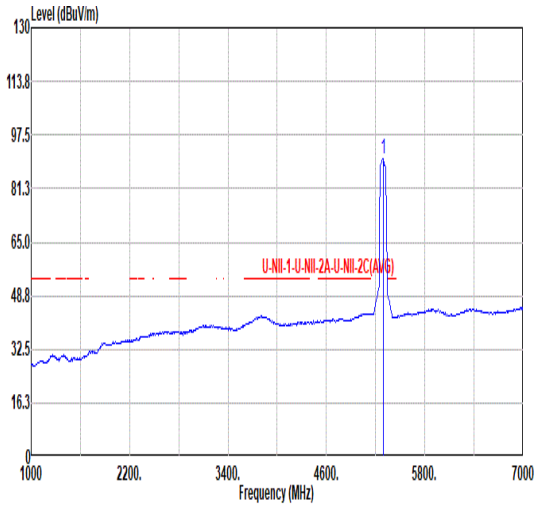 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 90.46 ------ ------ 82.19 34.28 10.71 36.72 0.00 287 0 AVERAGE

Mode	27	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz	
ANT	3	
Pol.	Horizontal	Fundamental
Peak	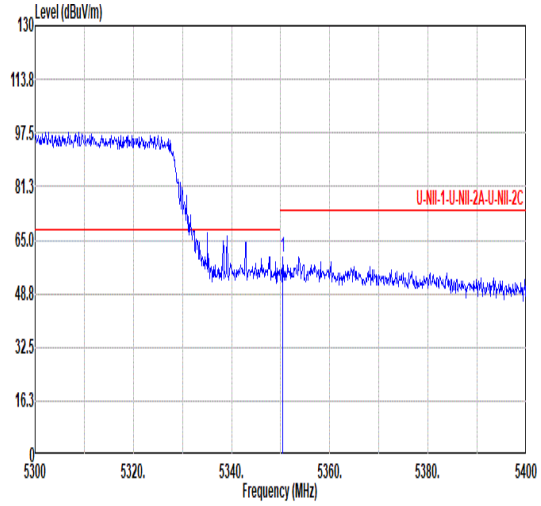 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.40 59.68 74.00 -14.32 51.10 34.35 10.75 36.52 0.00 287 0 PEAK	Blank
Avg	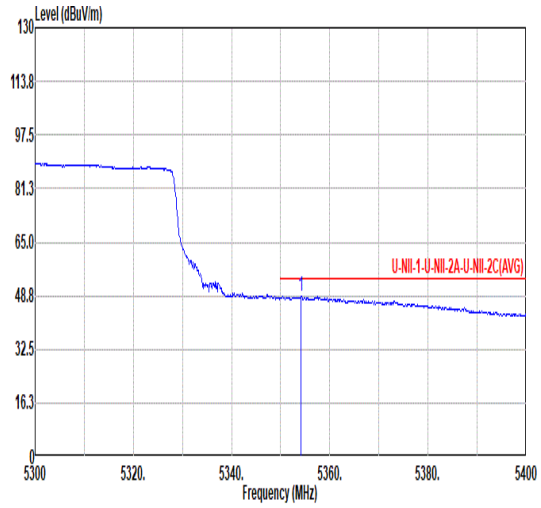 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5354.20 48.74 54.00 -5.26 40.15 34.35 10.75 36.51 0.00 287 0 AVERAGE	Blank

Mode	27	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	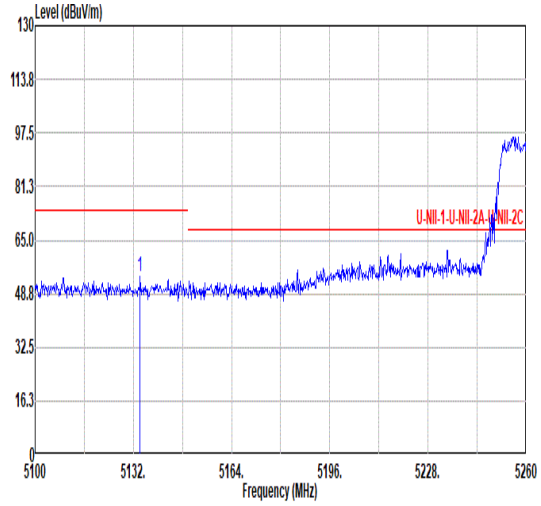 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5134.24 54.16 74.00 -19.84 46.56 34.00 10.59 36.99 0.00 316 58 PEAK	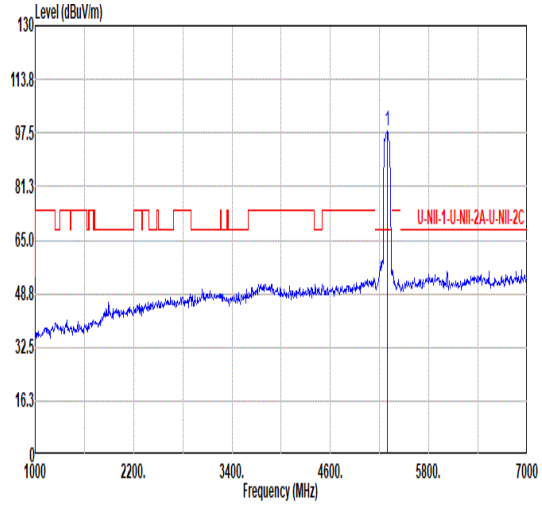 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 98.36 ------ ------ 90.00 34.30 10.72 36.66 0.00 316 58 PEAK
Avg	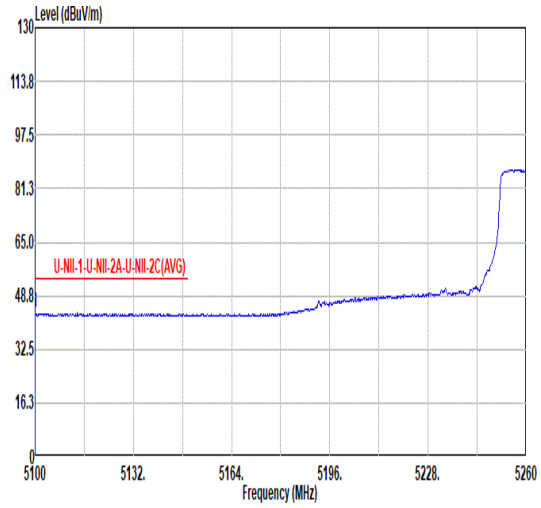 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5100.00 43.48 54.00 -10.52 35.92 33.90 10.56 36.90 0.00 316 58 AVERAGE	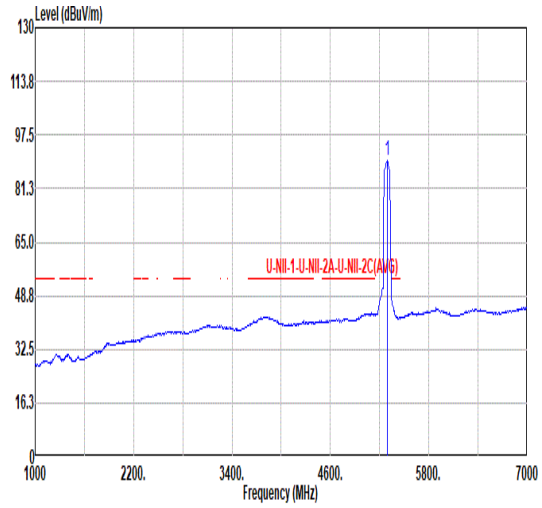 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 89.83 ------ ------ 81.47 34.30 10.72 36.66 0.00 316 58 AVERAGE

Mode	27	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	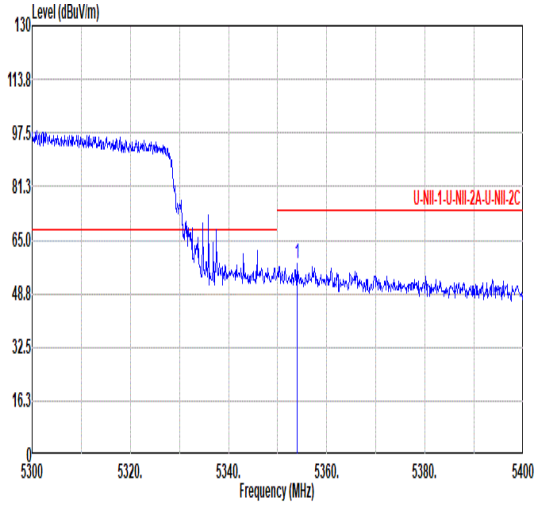 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.90 57.75 74.00 -16.25 49.16 34.35 10.75 36.51 0.00 316 58 PEAK	Blank
Avg	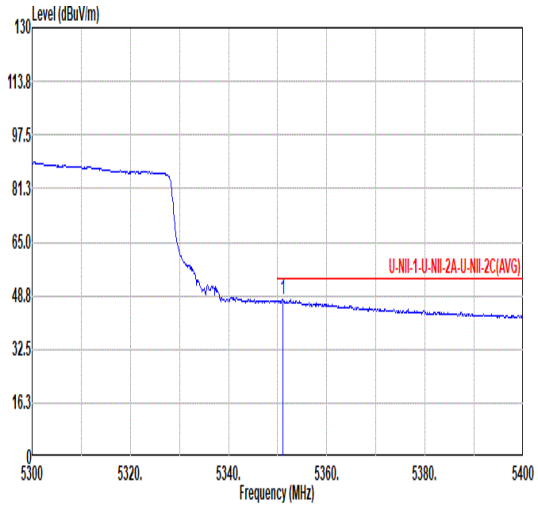 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.00 47.54 54.00 -6.46 38.96 34.35 10.75 36.52 0.00 316 58 AVERAGE	Blank

Mode	27	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak Avg	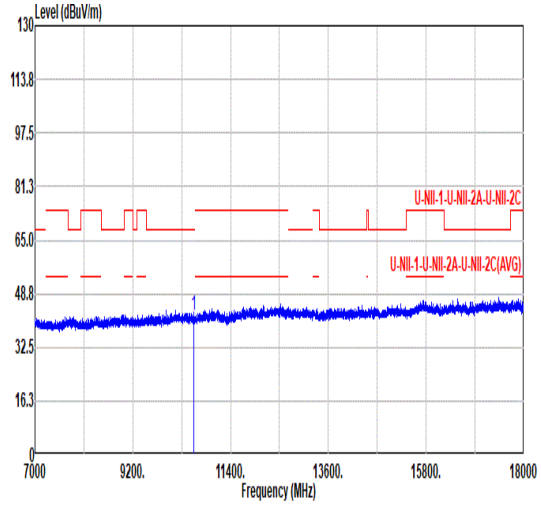 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10580.00 42.14 68.20 -26.06 56.08 37.48 15.62 67.04 0.00 --- --- PEAK	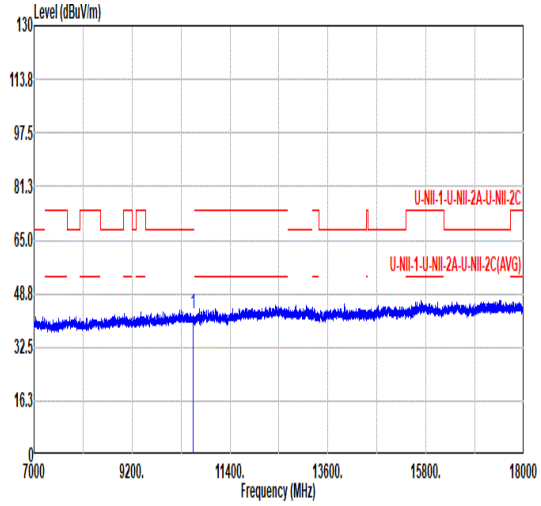 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10580.00 42.72 68.20 -25.48 56.66 37.48 15.62 67.04 0.00 --- --- PEAK

Mode	28	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz	
ANT	3	
Pol.	Horizontal	Fundamental
Peak	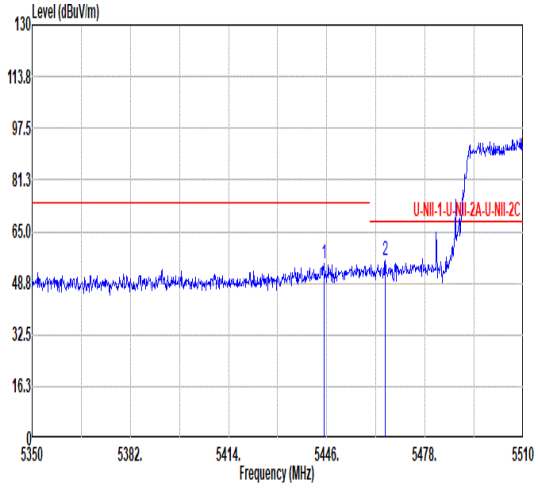 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5445.04 54.80 74.00 -19.20 46.06 34.35 10.82 36.43 0.00 388 360 PEAK 2 5465.04 56.08 68.20 -12.12 47.35 34.33 10.85 36.45 0.00 388 360 PEAK	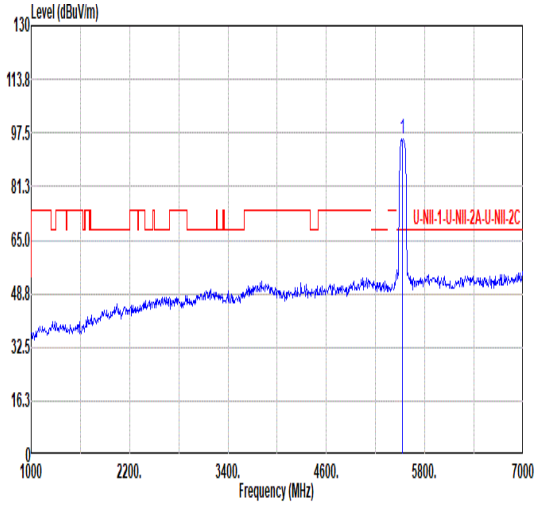 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 95.78 ------ ------ 86.87 34.37 10.93 36.39 0.00 388 360 PEAK
Avg	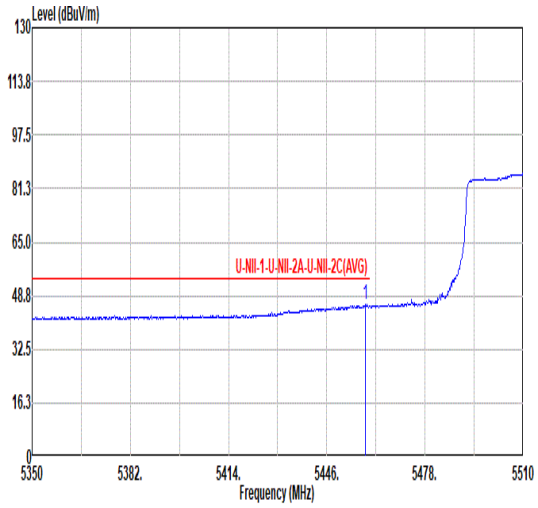 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.48 45.95 54.00 -8.05 37.21 34.34 10.84 36.44 0.00 388 360 AVERAGE	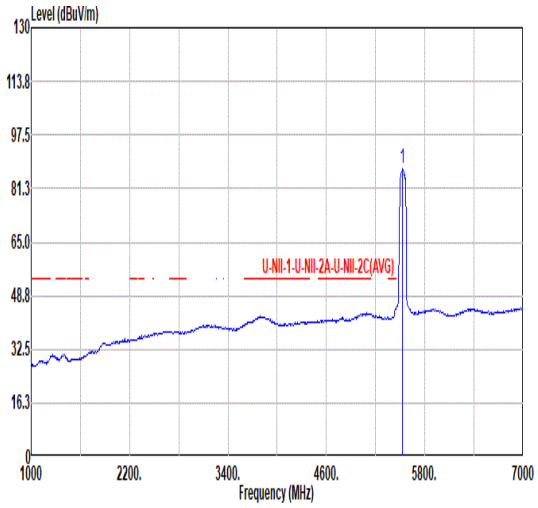 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 87.10 ------ ------ 78.23 34.36 10.92 36.41 0.00 388 360 AVERAGE

Mode	28	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz	
ANT	3	
Pol.	Horizontal	Fundamental
Peak	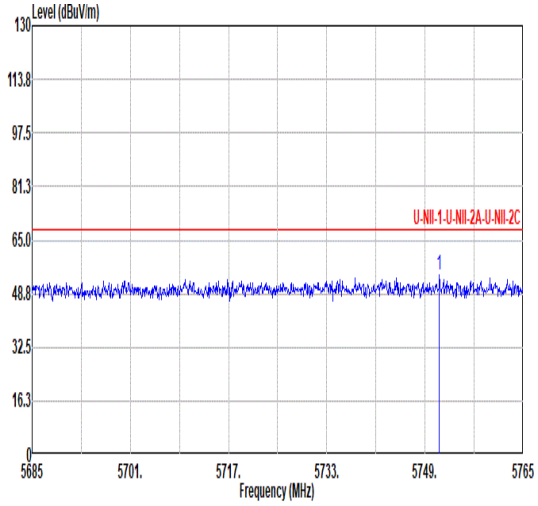	Blank

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5751.32	54.31	68.20	-13.89	44.98	34.56	11.21	36.44	0.00	388	360	PEAK

Mode	28	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	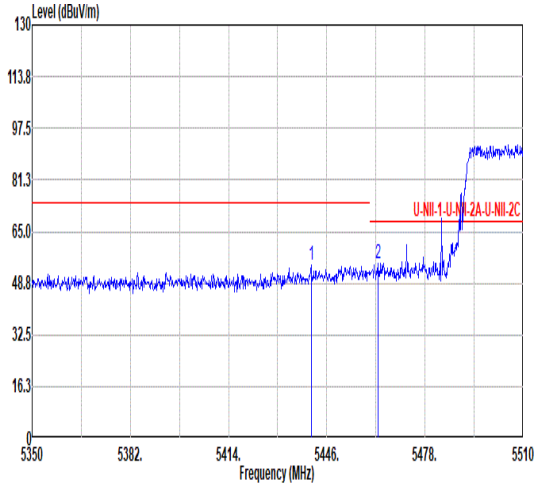 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5440.88 54.69 74.00 -19.31 45.94 34.36 10.82 36.43 0.00 138 315 PEAK 2 5462.80 55.04 68.20 -13.16 46.30 34.34 10.84 36.44 0.00 138 315 PEAK	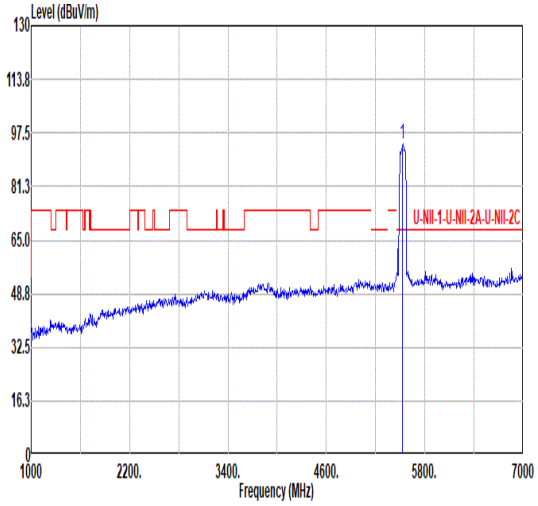 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 94.36 ------ ------ 85.45 34.37 10.93 36.39 0.00 138 315 PEAK
Avg	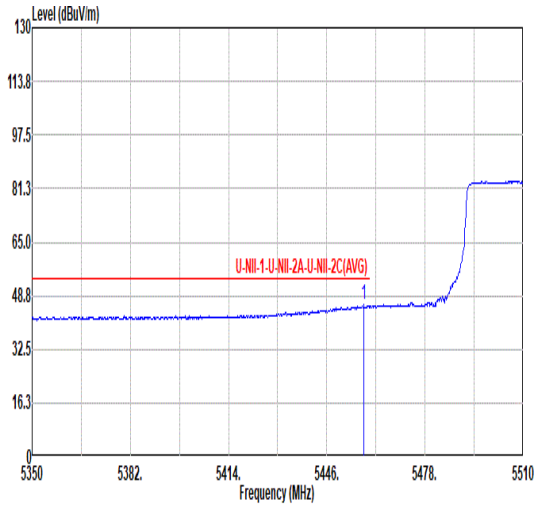 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.16 45.95 54.00 -8.05 37.21 34.36 10.84 36.44 0.00 138 315 AVERAGE	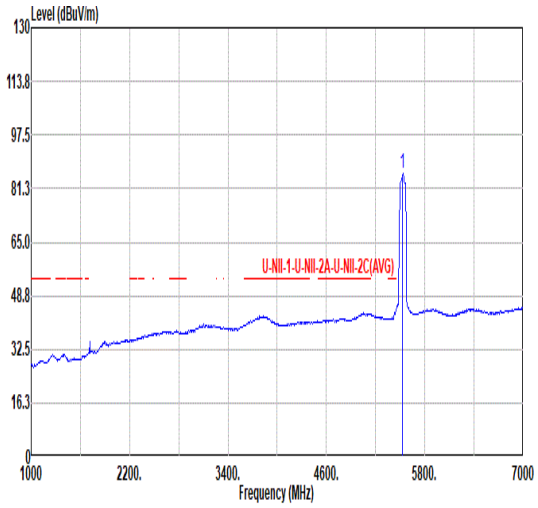 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 85.65 ------ ------ 76.74 34.37 10.93 36.39 0.00 138 315 AVERAGE

Mode	28	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	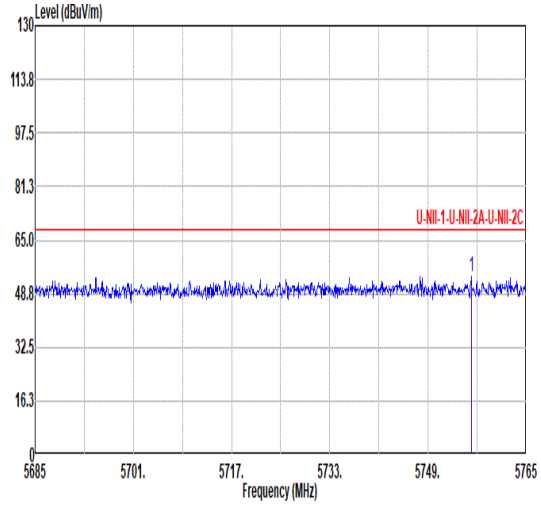	Blank

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5756.04	54.07	68.20	-14.13	44.72	34.58	11.22	36.45	0.00	138	315	PEAK

Mode	28	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak Avg	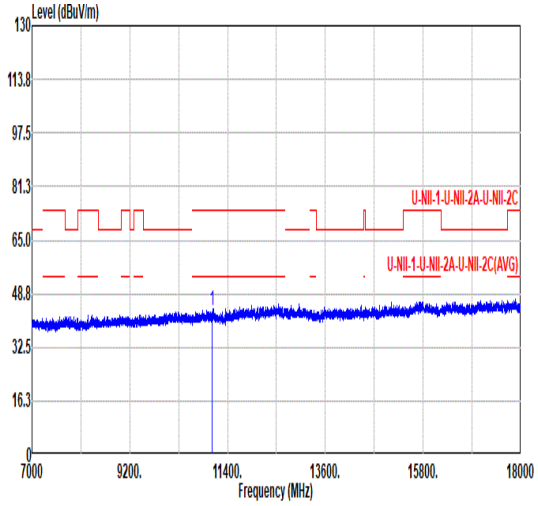 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11060.00 43.81 74.00 -30.19 56.50 37.85 16.08 66.62 0.00 --- --- PEAK	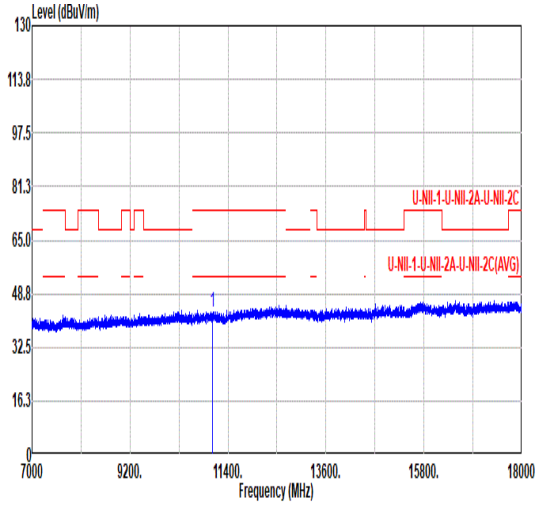 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11060.00 43.14 74.00 -30.86 55.83 37.85 16.08 66.62 0.00 --- --- PEAK

Mode	29	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz	
ANT	3	
Pol.	Horizontal	Fundamental
Peak	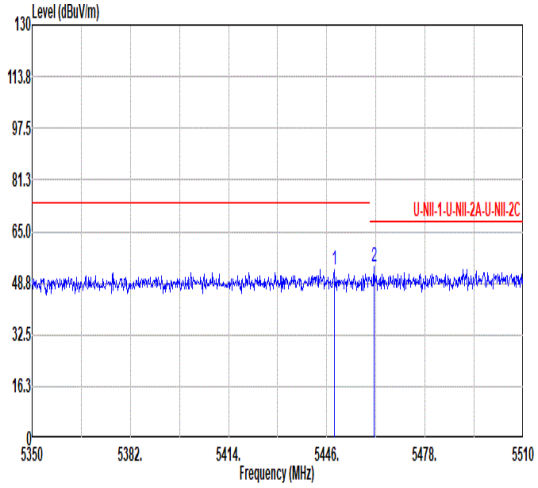 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5448.40 52.82 74.00 -21.18 44.07 34.35 10.83 36.43 0.00 377 0 PEAK 2 5461.52 54.20 68.20 -14.00 45.46 34.34 10.84 36.44 0.00 377 0 PEAK	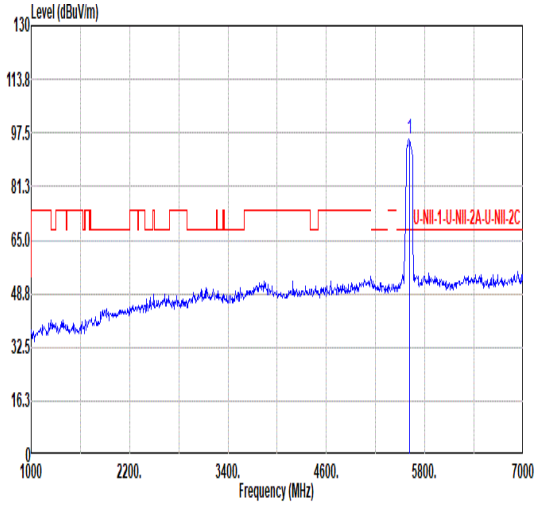 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 95.81 ------ ------ 86.59 34.48 11.01 36.27 0.00 377 0 PEAK
Avg	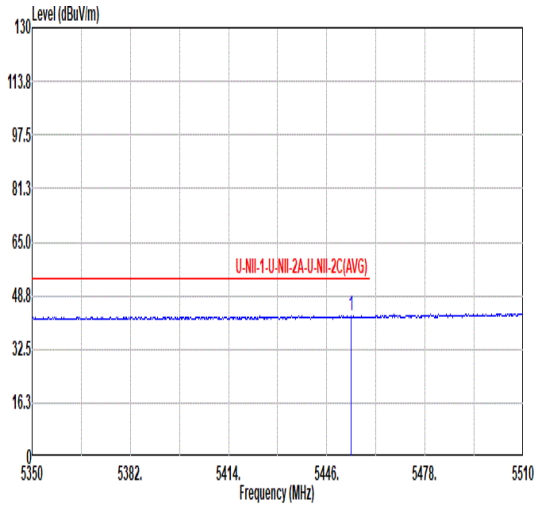 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5453.84 42.56 54.00 -11.44 33.82 34.35 10.83 36.44 0.00 377 0 AVERAGE	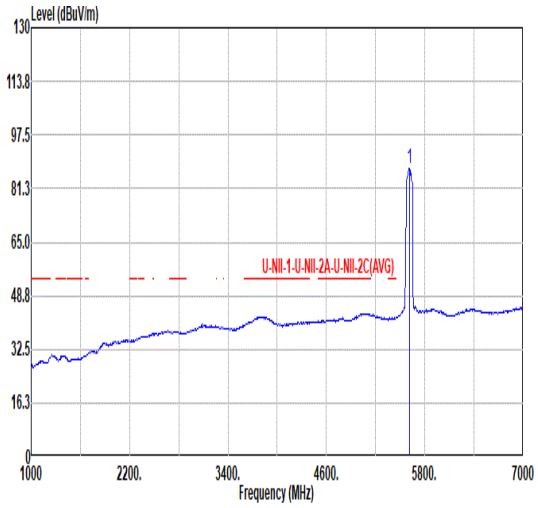 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 87.16 ------ ------ 77.94 34.47 11.02 36.27 0.00 377 0 AVERAGE

Mode	29	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz	
ANT	3	
Pol.	Horizontal	Fundamental
Peak	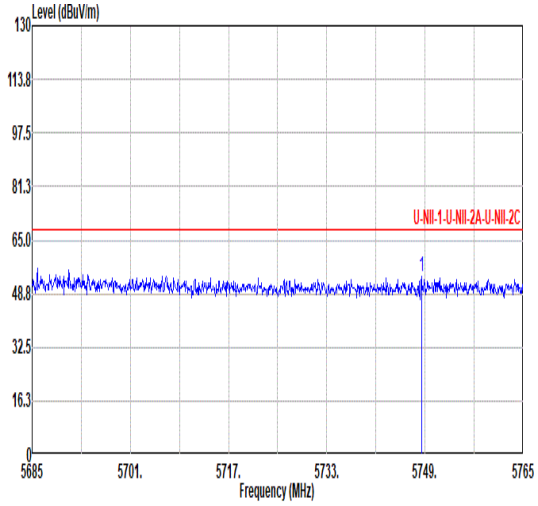 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5748.44 53.87 68.20 -14.33 44.56 34.54 11.21 36.44 0.00 377 0 PEAK	Blank

Mode	29	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	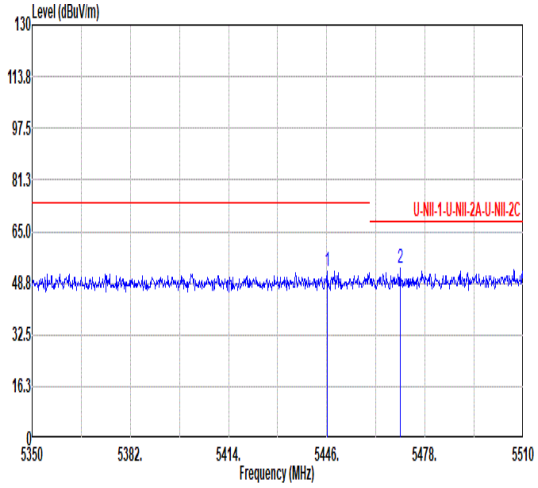 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5446.16 52.47 74.00 -21.53 43.73 34.35 10.82 36.43 0.00 100 341 PEAK 2 5469.84 53.66 68.20 -14.54 44.93 34.33 10.85 36.45 0.00 100 341 PEAK	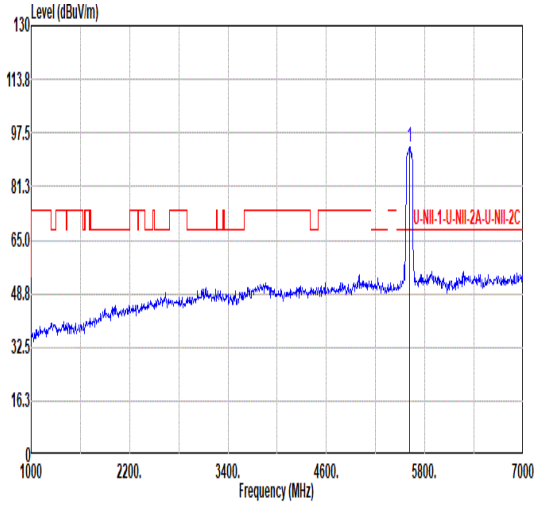 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 93.42 ------ ------ 84.20 34.47 11.02 36.27 0.00 100 341 PEAK
Avg	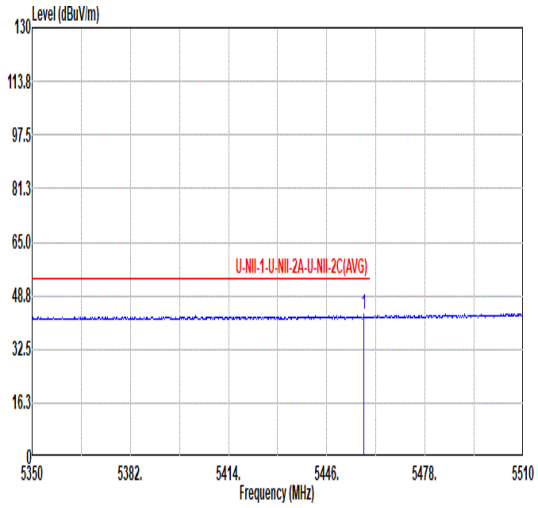 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.16 42.98 54.00 -11.02 34.24 34.34 10.84 36.44 0.00 100 341 AVERAGE	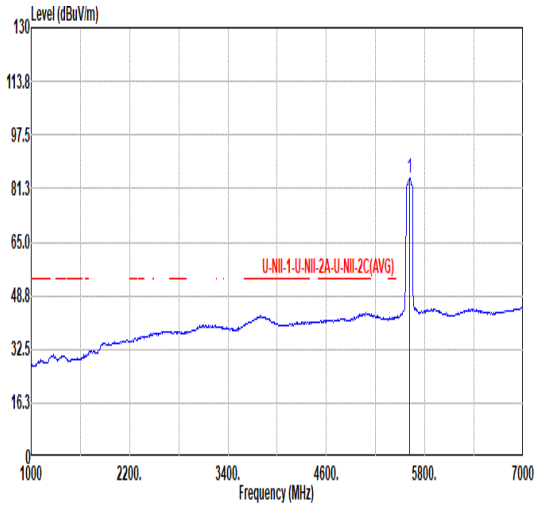 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 84.54 ------ ------ 75.32 34.47 11.02 36.27 0.00 100 341 AVERAGE

Mode	29	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	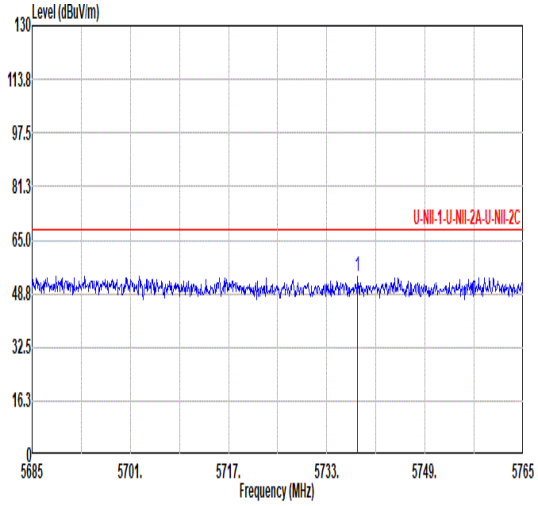 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5738.04 53.81 68.20 -14.39 44.55 34.49 11.19 36.42 0.00 100 341 PEAK	Blank

Mode	29	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak Avg	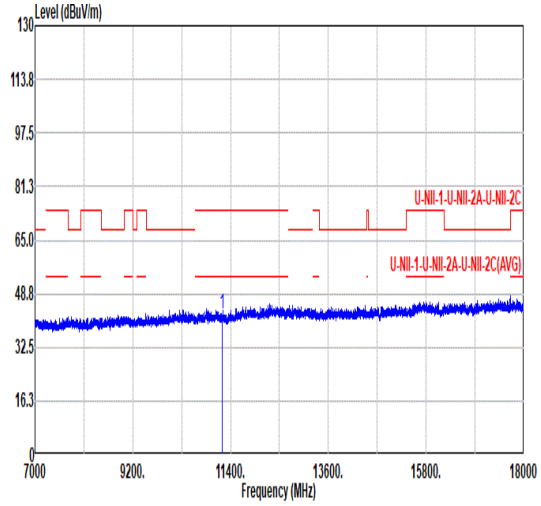 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11220.00 42.44 74.00 -31.56 54.87 38.00 16.18 66.61 0.00 --- --- PEAK	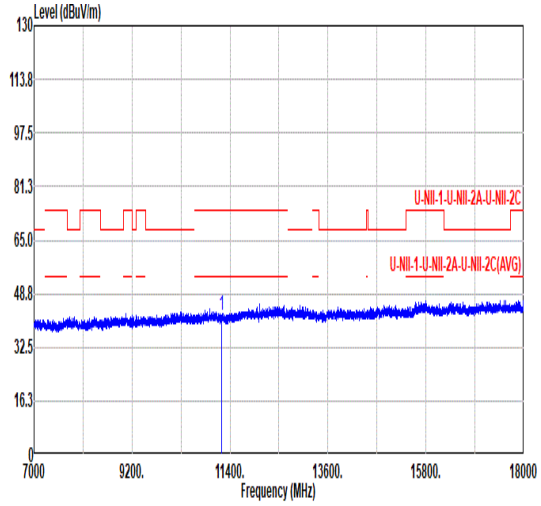 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11220.00 42.11 74.00 -31.89 54.54 38.00 16.18 66.61 0.00 --- --- PEAK

Mode	23	
	18G-40G	
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak Avg	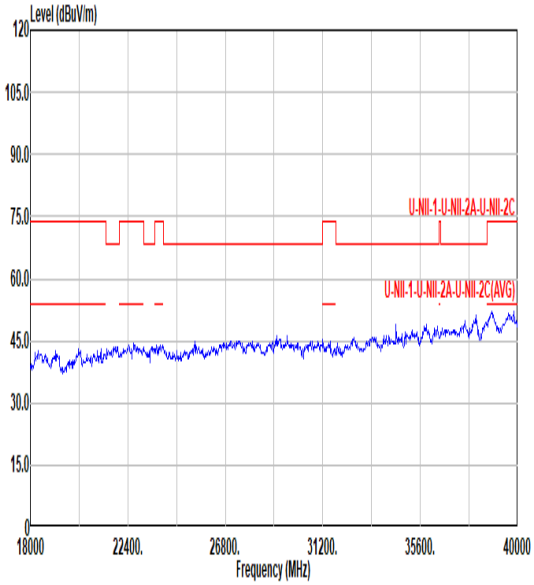	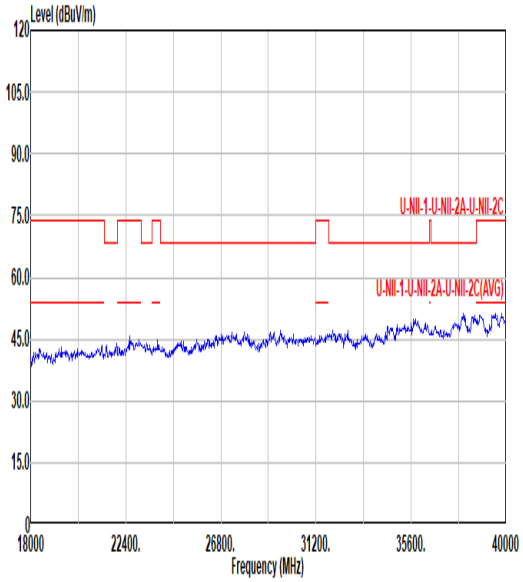

Mode	23
	30-1G
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz
ANT	3

Pol.	Horizontal	Vertical
Peak	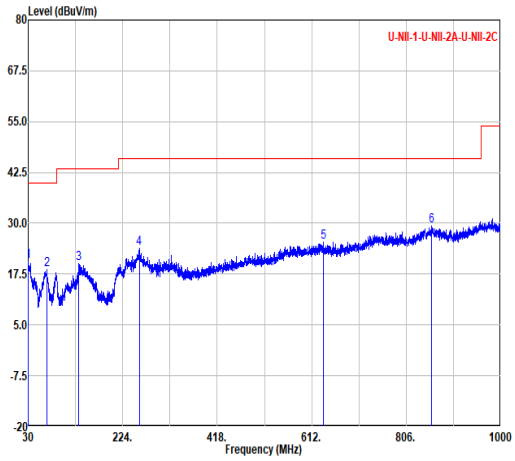 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 30.49 20.58 40.00 -19.42 27.05 24.91 0.83 32.21 -- -- Peak 2 67.83 18.56 40.00 -21.44 37.30 12.01 1.26 32.01 -- -- Peak 3 134.28 20.20 43.50 -23.30 32.99 17.51 1.76 32.06 -- -- Peak 4 257.95 23.90 46.00 -22.10 33.82 19.52 2.46 31.90 -- -- Peak 5 635.28 25.37 46.00 -20.63 27.33 26.29 3.86 32.11 -- -- Peak 6 857.90 29.40 46.00 -16.60 26.70 29.72 4.45 31.47 -- -- Peak	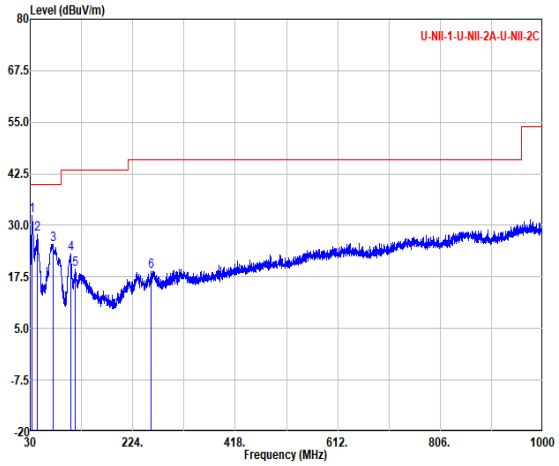 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 33.88 32.32 40.00 -7.68 40.74 22.89 0.89 32.20 -- -- Peak 2 43.58 27.80 40.00 -12.20 41.33 17.64 1.01 32.18 -- -- Peak 3 72.92 25.45 40.00 -14.55 43.53 12.60 1.30 31.98 -- -- Peak 4 106.63 23.05 43.50 -20.45 36.83 16.70 1.58 32.06 -- -- Peak 5 114.88 19.33 43.50 -24.17 32.48 17.28 1.63 32.06 -- -- Peak 6 258.92 18.92 46.00 -27.08 28.72 19.65 2.46 31.91 -- -- Peak

Mode	30	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	3	
Pol.	Horizontal	Fundamental
Peak	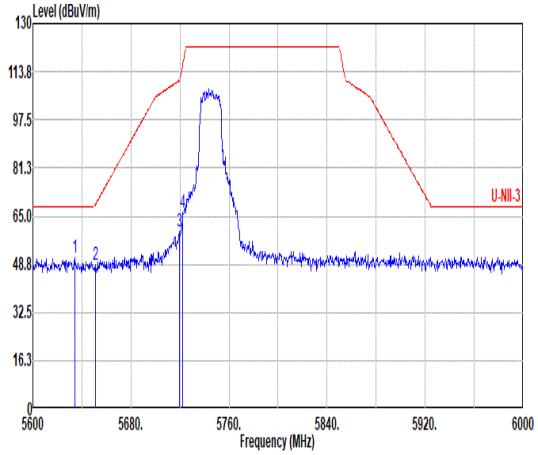 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5634.00 51.05 68.20 -17.15 41.86 34.43 11.05 36.29 0.00 393 0 PEAK 2 5650.80 48.33 68.80 -20.47 39.17 34.40 11.07 36.31 0.00 393 0 PEAK 3 5719.60 59.67 110.79 -51.12 50.49 34.40 11.17 36.39 0.00 393 0 PEAK 4 5722.40 66.16 116.37 -50.21 56.97 34.41 11.17 36.39 0.00 393 0 PEAK	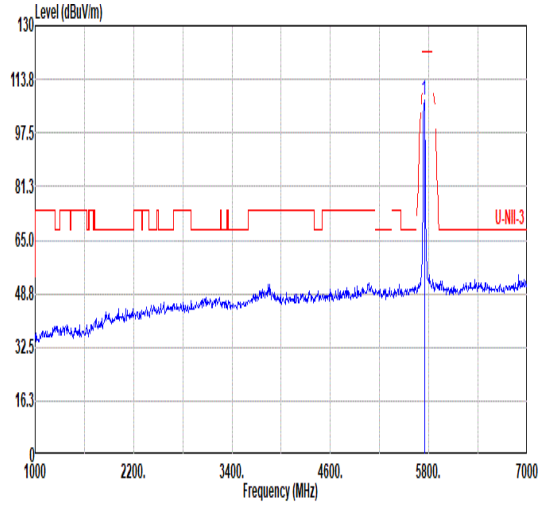 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 107.67 ------ ------ 98.36 34.53 11.21 36.43 0.00 393 0 PEAK
Avg	Blank	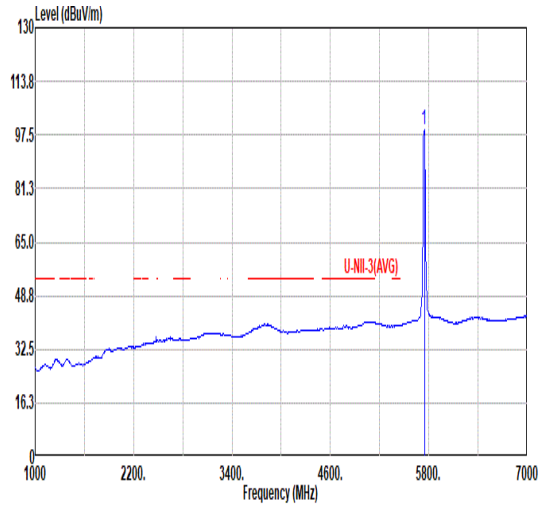 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 99.21 ------ ------ 89.90 34.53 11.21 36.43 0.00 393 0 AVERAGE

Mode	30	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	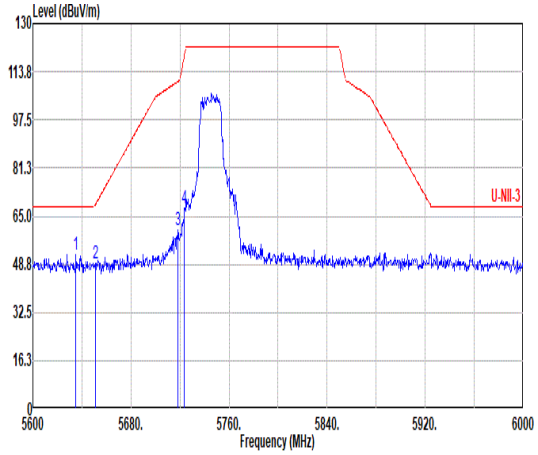 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5635.20 52.19 68.20 -16.01 43.00 34.43 11.05 36.29 0.00 135 337 PEAK 2 5651.20 49.22 69.09 -19.87 40.06 34.40 11.07 36.31 0.00 135 337 PEAK 3 5718.40 60.45 110.45 -50.00 51.27 34.39 11.17 36.38 0.00 135 337 PEAK 4 5723.60 67.62 119.11 -51.49 58.42 34.42 11.17 36.39 0.00 135 337 PEAK	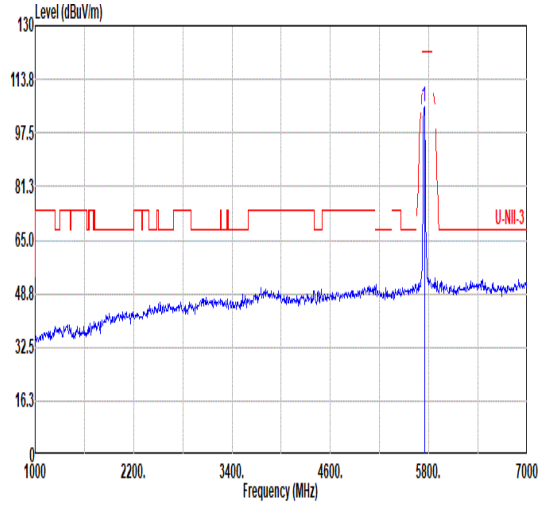 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 105.53 ------ ------ 96.22 34.53 11.21 36.43 0.00 135 337 PEAK
Avg	Blank	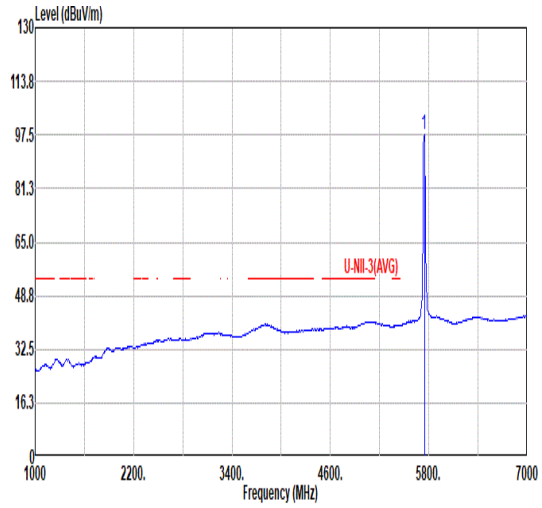 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 97.71 ------ ------ 88.40 34.53 11.21 36.43 0.00 135 337 AVERAGE

Mode	30	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak Avg	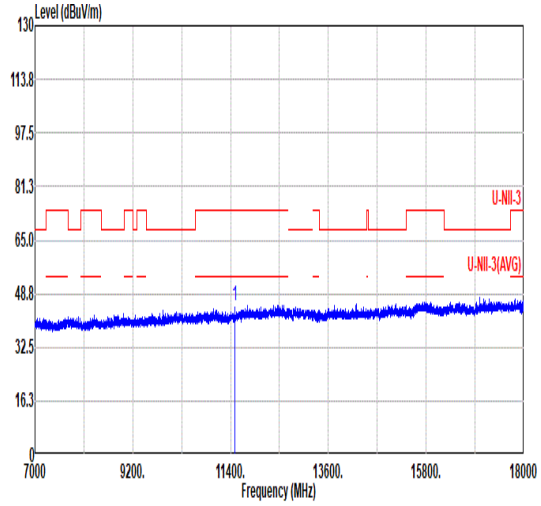 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 45.32 74.00 -28.68 57.30 38.24 16.36 66.58 0.00 --- --- PEAK	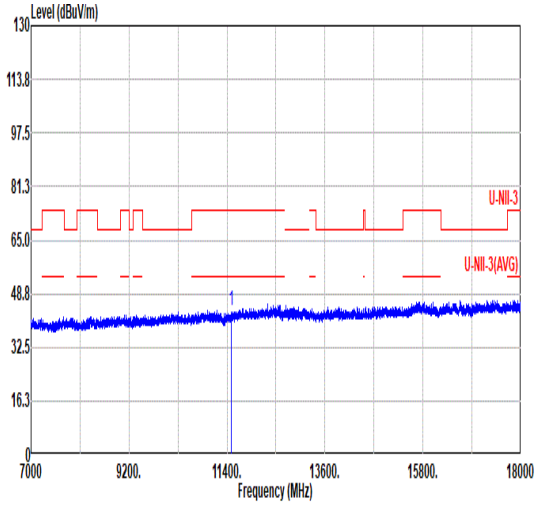 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 43.61 74.00 -30.39 55.59 38.24 16.36 66.58 0.00 --- --- PEAK

Mode	31	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak Avg	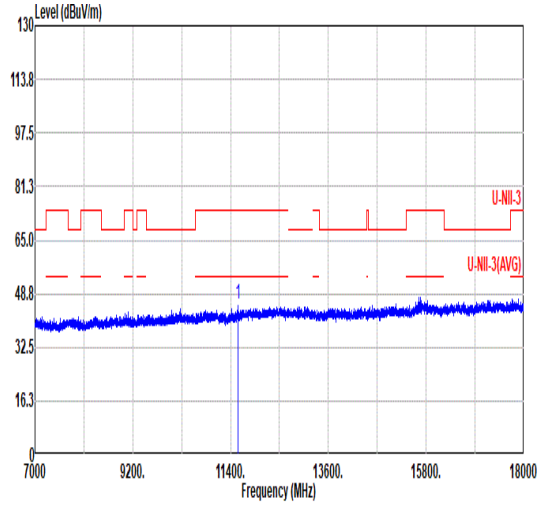 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 45.52 74.00 -28.48 57.33 38.31 16.41 66.53 0.00 --- --- PEAK	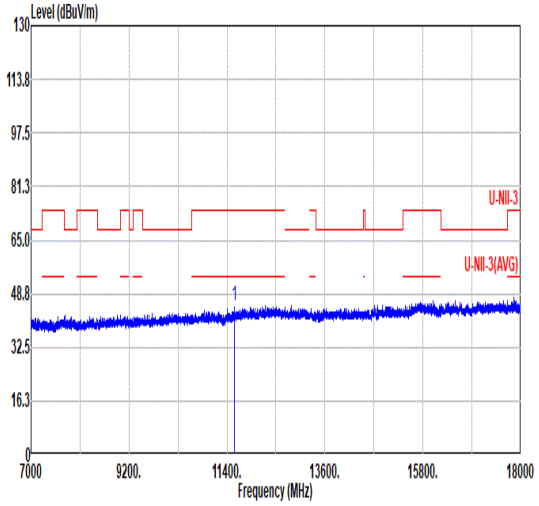 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 44.99 74.00 -29.01 56.80 38.31 16.41 66.53 0.00 --- --- PEAK

Mode	32	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
ANT	3	
Pol.	Horizontal	Fundamental
Peak	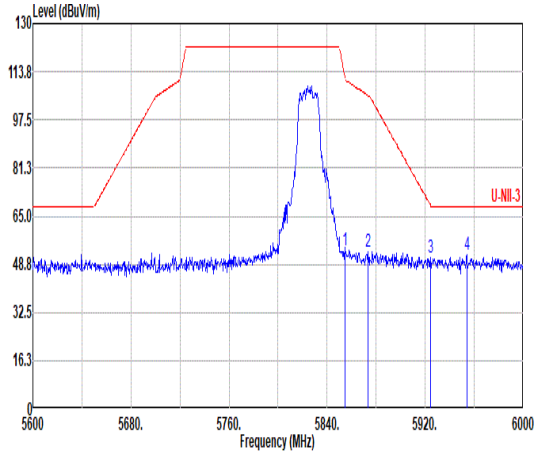 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 53.42 111.36 -57.94 43.86 34.85 11.34 36.63 0.00 400 354 PEAK 2 5873.60 52.89 105.69 -52.80 43.33 34.87 11.35 36.66 0.00 400 354 PEAK 3 5924.40 50.78 68.64 -17.86 41.23 34.97 11.40 36.82 0.00 400 354 PEAK 4 5954.00 51.75 68.20 -16.45 42.21 35.06 11.43 36.95 0.00 400 354 PEAK	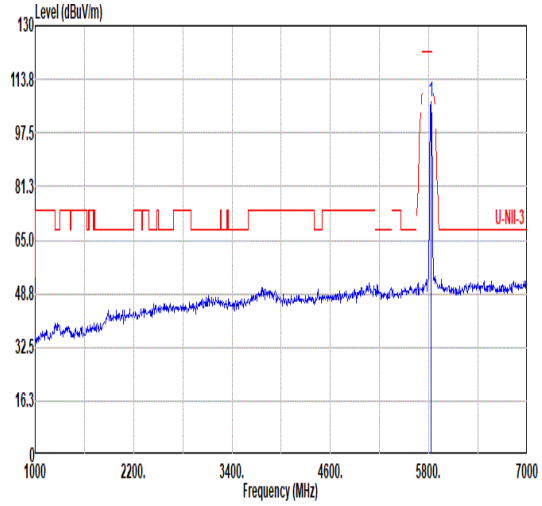 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 106.98 ------ ------ 97.42 34.82 11.31 36.57 0.00 400 354 PEAK
Avg	Blank	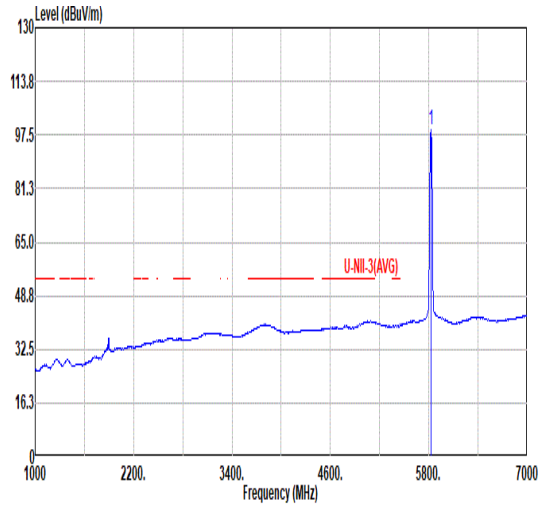 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 98.92 ------ ------ 89.36 34.82 11.31 36.57 0.00 400 354 AVERAGE

Mode	32	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	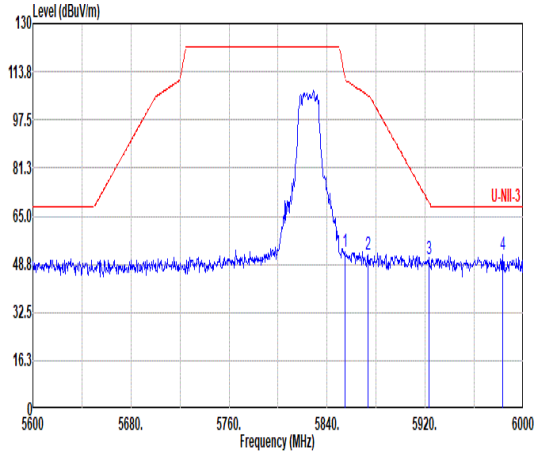 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.40 52.80 112.27 -59.47 43.25 34.85 11.33 36.63 0.00 102 340 PEAK 2 5873.60 51.79 105.69 -53.90 42.23 34.87 11.35 36.66 0.00 102 340 PEAK 3 5923.20 50.73 69.53 -18.80 41.17 34.97 11.40 36.81 0.00 102 340 PEAK 4 5983.20 51.81 68.20 -16.39 42.28 35.15 11.46 37.08 0.00 102 340 PEAK	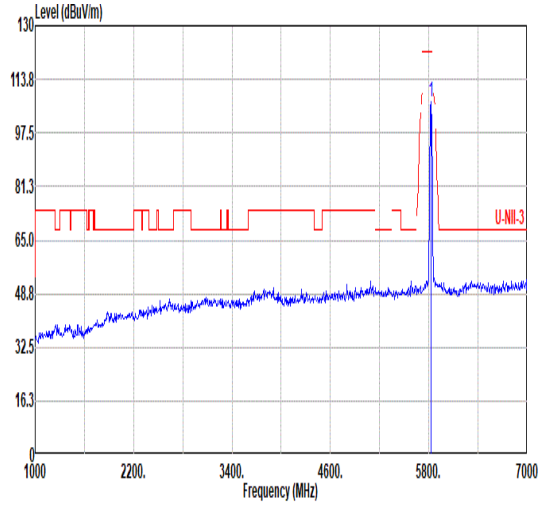 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 106.91 ------ ------ 97.35 34.82 11.31 36.57 0.00 102 340 PEAK
Avg	Blank	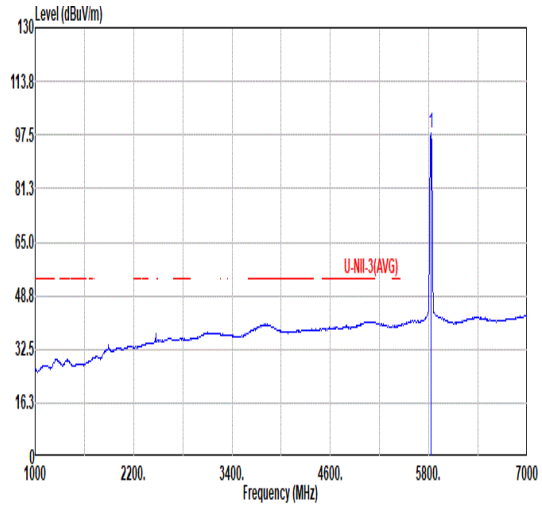 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 98.16 ------ ------ 88.60 34.82 11.31 36.57 0.00 102 340 AVERAGE

Mode	32	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak Avg	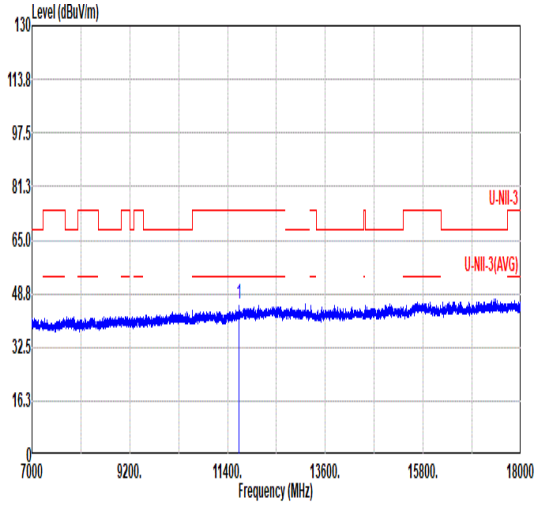 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 45.48 74.00 -28.52 57.11 38.38 16.46 66.47 0.00 --- --- PEAK	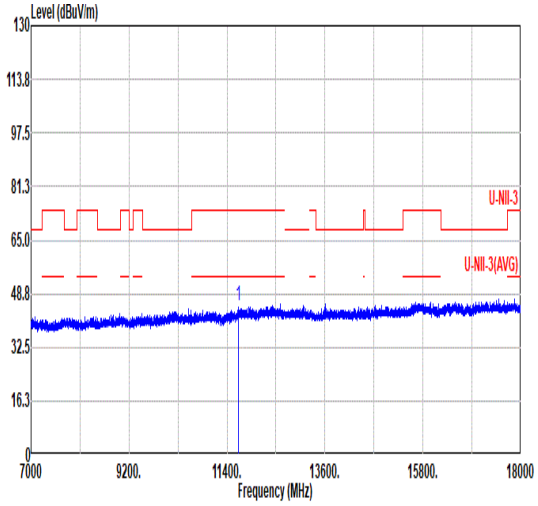 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 45.02 74.00 -28.98 56.65 38.38 16.46 66.47 0.00 --- --- PEAK

Mode	33	
	Band Edge	
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz	
ANT	3	
Pol.	Horizontal	Fundamental
Peak	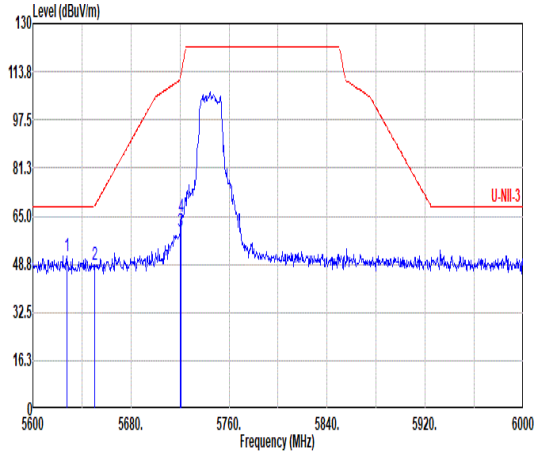 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5627.60 51.46 68.20 -16.74 42.26 34.44 11.04 36.28 0.00 395 0 PEAK 2 5650.40 48.79 68.50 -19.71 39.63 34.40 11.07 36.31 0.00 395 0 PEAK 3 5720.00 60.05 110.90 -50.85 50.87 34.40 11.17 36.39 0.00 395 0 PEAK 4 5720.80 64.82 112.72 -47.90 55.64 34.40 11.17 36.39 0.00 395 0 PEAK	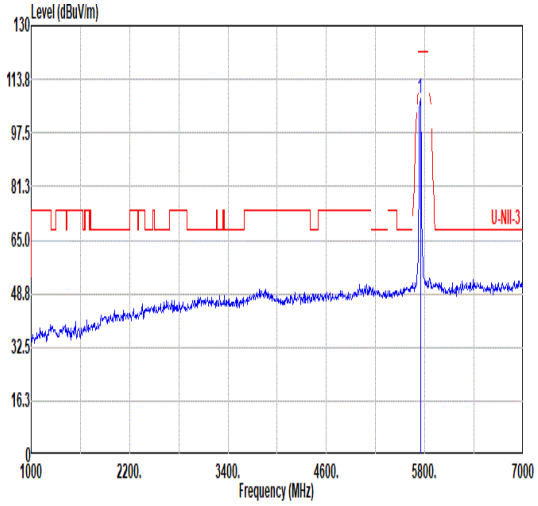 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 107.94 ------ ------ 98.63 34.53 11.21 36.43 0.00 395 0 PEAK
Avg	Blank	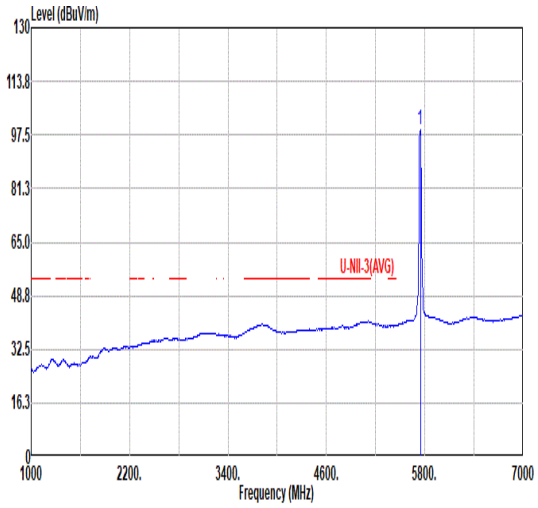 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 98.95 ------ ------ 89.64 34.53 11.21 36.43 0.00 395 0 AVERAGE

Mode	33	
	Band Edge	
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	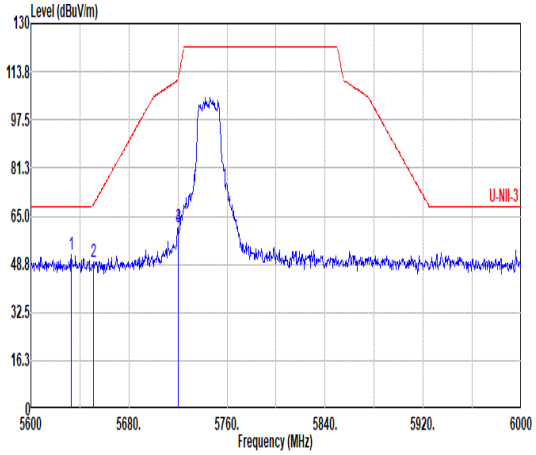 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5632.80 51.82 68.20 -16.38 42.63 34.43 11.05 36.29 0.00 100 337 PEAK 2 5650.80 49.70 68.80 -19.10 40.54 34.40 11.07 36.31 0.00 100 337 PEAK 3 5720.00 61.24 110.90 -49.66 52.06 34.40 11.17 36.39 0.00 100 337 PEAK 4 5720.00 61.24 110.90 -49.66 52.06 34.40 11.17 36.39 0.00 100 337 PEAK	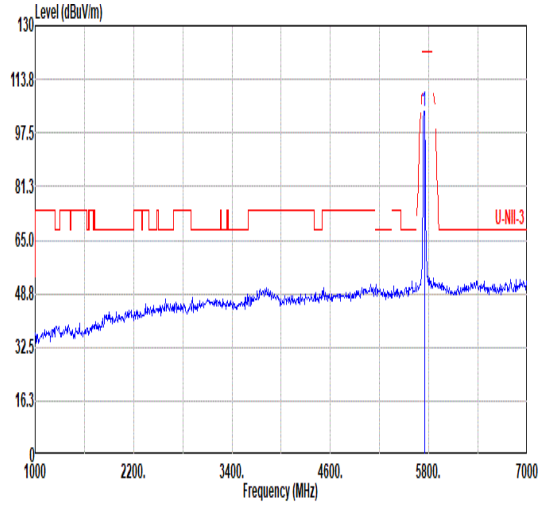 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 104.05 ------ ------ 94.77 34.50 11.20 36.42 0.00 100 337 PEAK
Avg	Blank	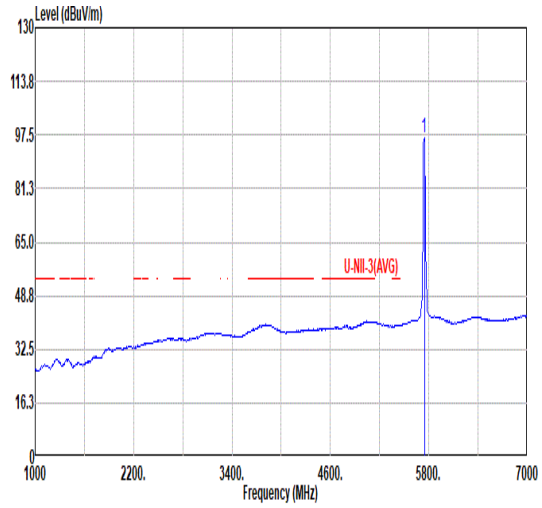 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 96.58 ------ ------ 87.27 34.53 11.21 36.43 0.00 100 337 AVERAGE

Mode	33	
	Harmonic	
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak Avg	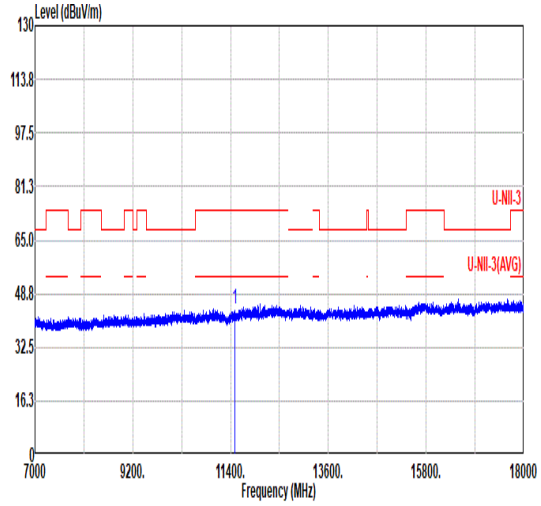 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 44.28 74.00 -29.72 56.26 38.24 16.36 66.58 0.00 --- --- PEAK	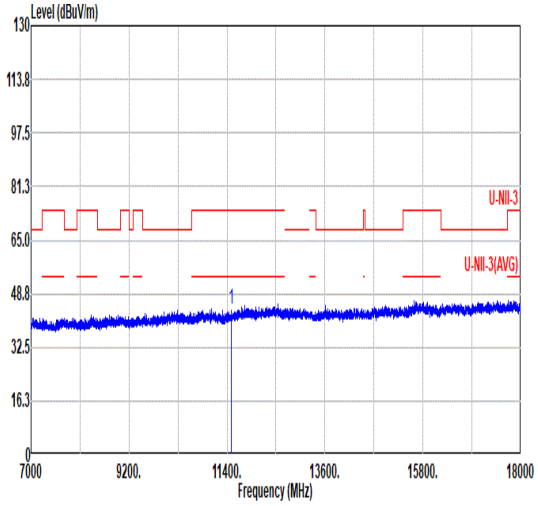 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 44.29 74.00 -29.71 56.27 38.24 16.36 66.58 0.00 --- --- PEAK

Mode	34	
	Harmonic	
	U-NII-3_5.725-5.85_802.11n HT20_CH157_5785MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak Avg	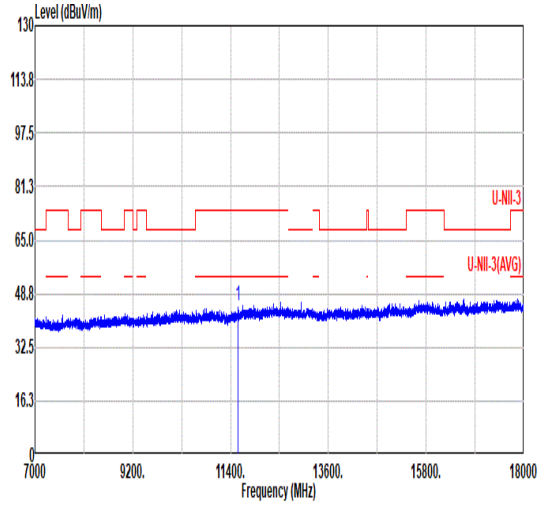 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 45.30 74.00 -28.70 57.11 38.31 16.41 66.53 0.00 --- --- PEAK	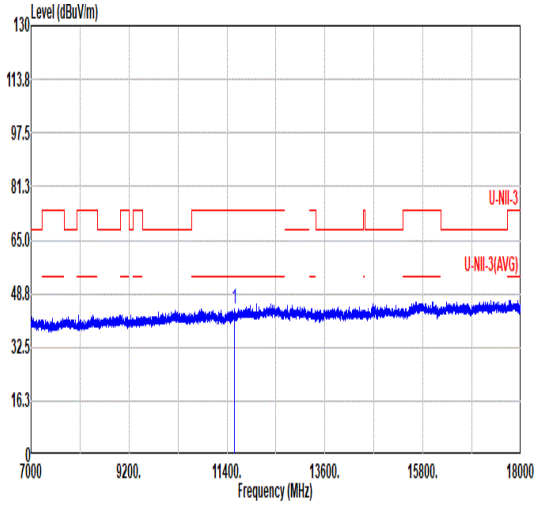 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 44.11 74.00 -29.89 55.92 38.31 16.41 66.53 0.00 --- --- PEAK

Mode	35	
	Band Edge	
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz	
ANT	3	
Pol.	Horizontal	Fundamental
Peak	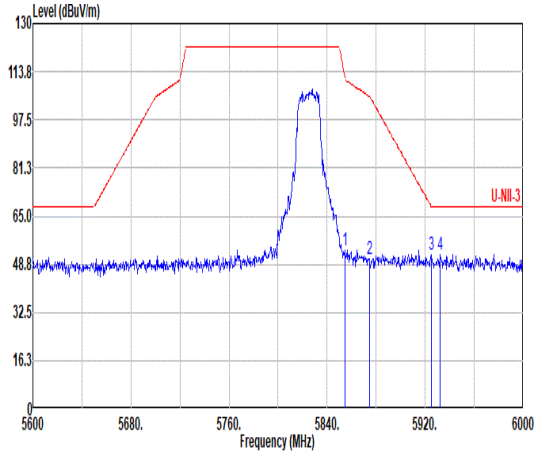 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.40 53.55 112.27 -58.72 44.00 34.85 11.33 36.63 0.00 399 357 PEAK 2 5874.40 50.61 105.47 -54.86 41.05 34.87 11.35 36.66 0.00 399 357 PEAK 3 5924.80 52.19 68.35 -16.16 42.64 34.97 11.40 36.82 0.00 399 357 PEAK 4 5932.40 52.05 68.20 -16.15 42.50 35.00 11.41 36.86 0.00 399 357 PEAK	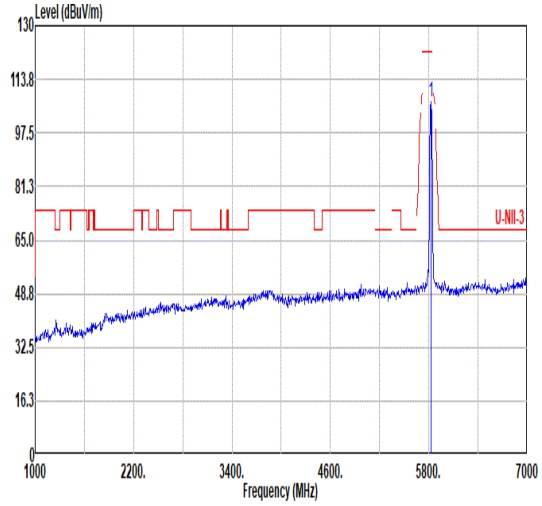 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 106.84 ------ ------ 97.28 34.82 11.31 36.57 0.00 399 357 PEAK
Avg	Blank	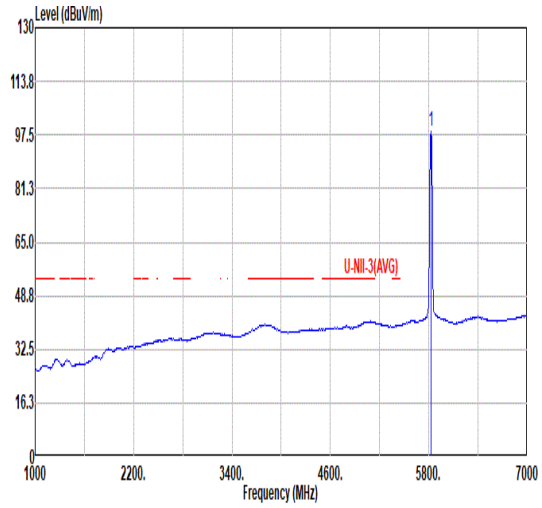 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 98.78 ------ ------ 89.22 34.82 11.31 36.57 0.00 399 357 AVERAGE

Mode	35	
	Band Edge	
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	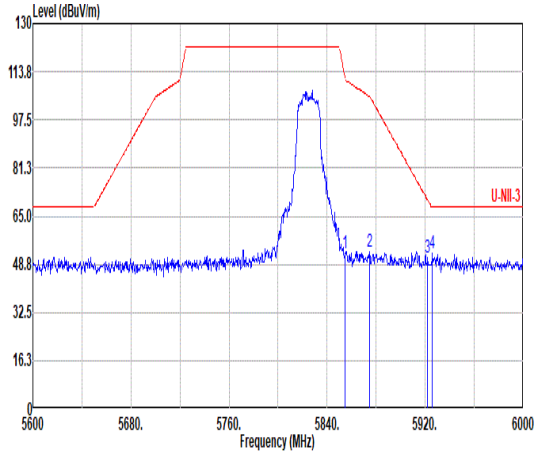 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.40 52.66 112.27 -59.61 43.11 34.85 11.33 36.63 0.00 114 340 PEAK 2 5874.40 53.21 105.47 -52.26 43.65 34.87 11.35 36.66 0.00 114 340 PEAK 3 5922.00 51.01 70.42 -19.41 41.45 34.97 11.40 36.81 0.00 114 340 PEAK 4 5926.00 52.50 68.20 -15.70 42.95 34.98 11.40 36.83 0.00 114 340 PEAK	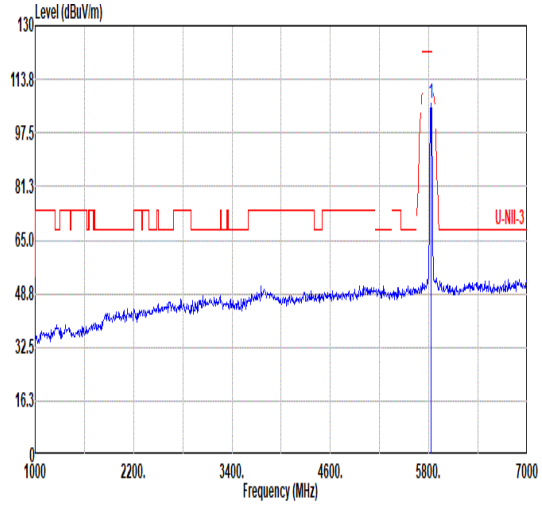 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 106.54 ------ ------ 96.98 34.83 11.31 36.58 0.00 114 340 PEAK
Avg	Blank	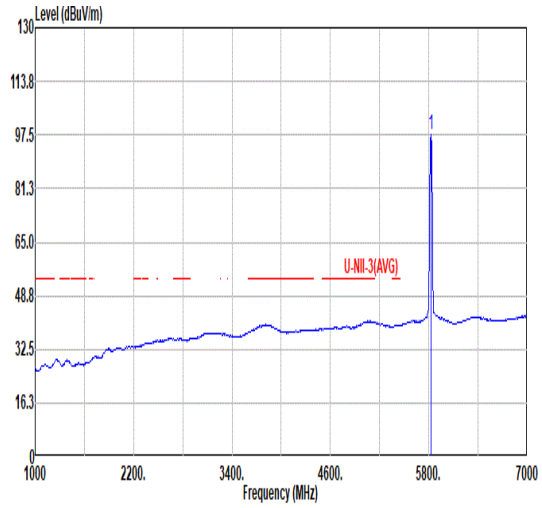 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 97.49 ------ ------ 87.93 34.82 11.31 36.57 0.00 114 340 AVERAGE

Mode	35	
	Harmonic	
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak Avg	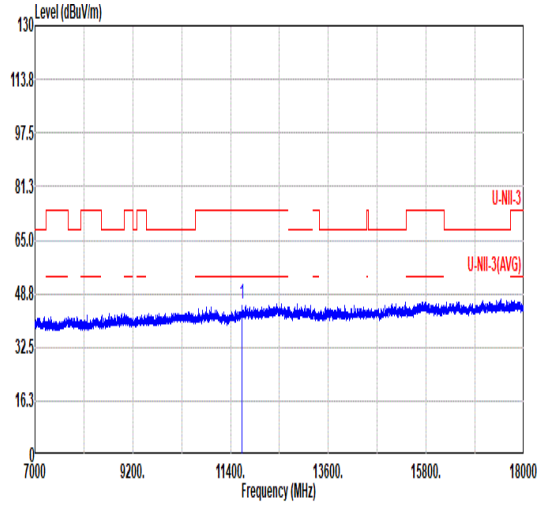 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 45.55 74.00 -28.45 57.18 38.38 16.46 66.47 0.00 --- --- PEAK	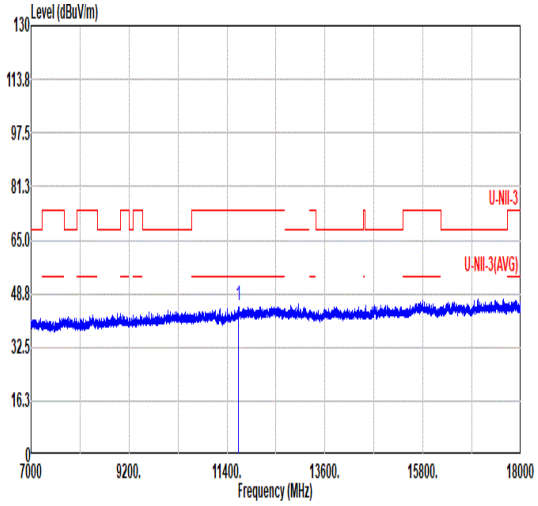 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 45.04 74.00 -28.96 56.67 38.38 16.46 66.47 0.00 --- --- PEAK

Mode	36	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz	
ANT	3	
Pol.	Horizontal	Fundamental
Peak	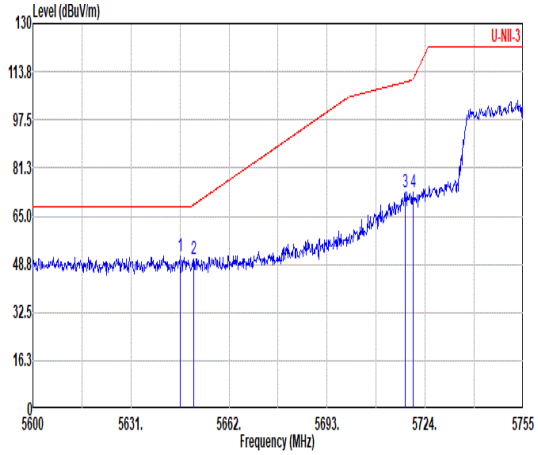 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5646.50 51.66 68.20 -16.54 42.48 34.41 11.07 36.30 0.00 270 0 PEAK 2 5650.84 50.36 68.83 -18.47 41.20 34.40 11.07 36.31 0.00 270 0 PEAK 3 5717.65 73.23 110.24 -37.01 64.05 34.39 11.17 36.38 0.00 270 0 PEAK 4 5720.13 72.91 111.19 -38.28 63.73 34.40 11.17 36.39 0.00 270 0 PEAK	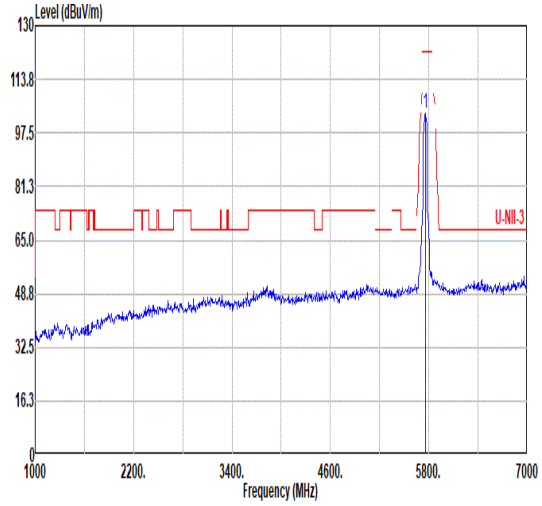 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 103.52 ------ ------ 94.16 34.59 11.22 36.45 0.00 270 0 PEAK
Avg	Blank	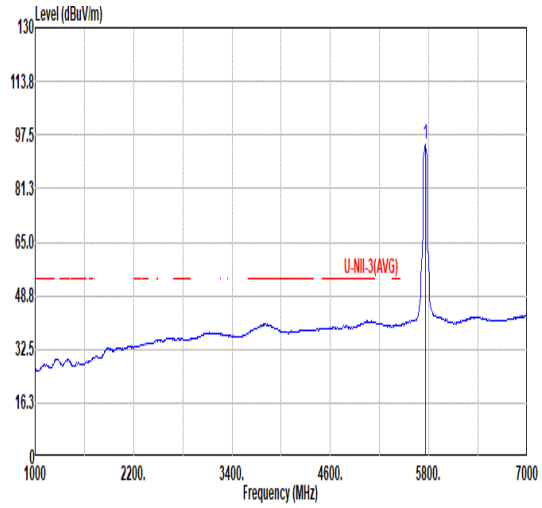 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 94.46 ------ ------ 85.10 34.59 11.22 36.45 0.00 270 0 AVERAGE

Mode	36	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz	
ANT	3	
Pol.	Horizontal	Fundamental
Peak	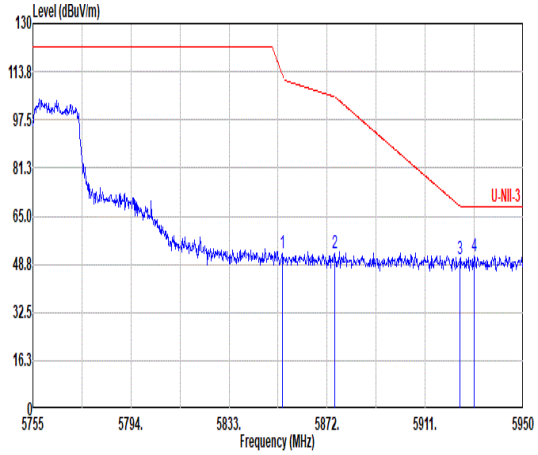 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.26 52.40 112.60 -60.20 42.85 34.85 11.33 36.63 0.00 270 0 PEAK 2 5874.93 52.28 105.32 -53.04 42.72 34.87 11.35 36.66 0.00 270 0 PEAK 3 5924.85 50.54 68.31 -17.77 40.99 34.97 11.40 36.82 0.00 270 0 PEAK 4 5930.50 51.45 68.20 -16.75 41.90 34.99 11.41 36.85 0.00 270 0 PEAK	Blank

Mode	36	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	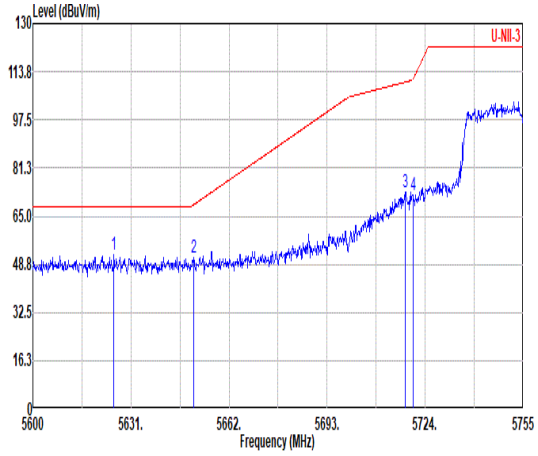 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5625.58 52.05 68.20 -16.15 42.84 34.45 11.04 36.28 0.00 138 337 PEAK 2 5650.84 51.14 68.83 -17.69 41.98 34.40 11.07 36.31 0.00 138 337 PEAK 3 5717.80 73.27 110.28 -37.01 64.09 34.39 11.17 36.38 0.00 138 337 PEAK 4 5720.13 72.35 111.19 -38.84 63.17 34.40 11.17 36.39 0.00 138 337 PEAK	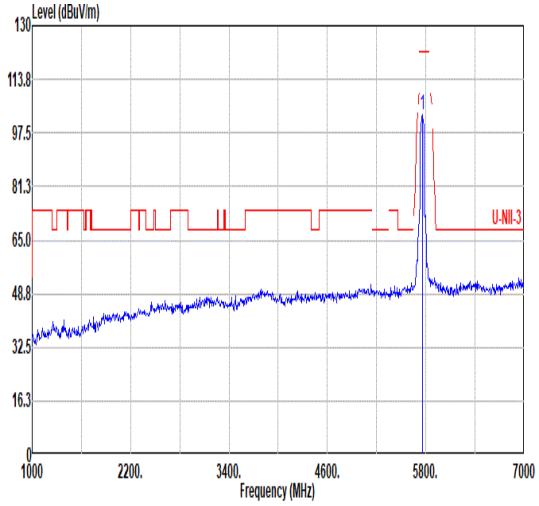 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 103.13 ------ ------ 93.77 34.59 11.22 36.45 0.00 138 337 PEAK
Avg	Blank	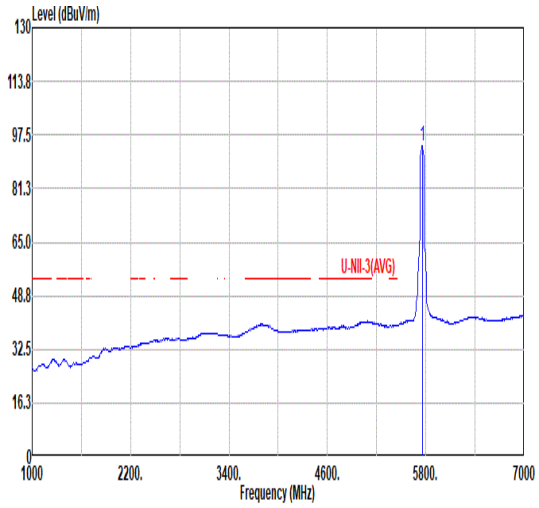 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 94.13 ------ ------ 84.77 34.59 11.22 36.45 0.00 138 337 AVERAGE

Mode	36	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	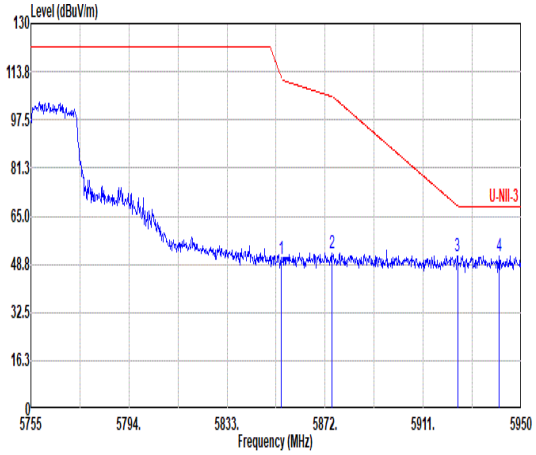 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.65 50.51 111.71 -61.20 40.95 34.85 11.34 36.63 0.00 138 337 PEAK 2 5874.73 52.39 105.38 -52.99 42.83 34.87 11.35 36.66 0.00 138 337 PEAK 3 5924.65 51.70 68.46 -16.76 42.15 34.97 11.40 36.82 0.00 138 337 PEAK 4 5941.23 51.56 68.20 -16.64 42.02 35.02 11.42 36.90 0.00 138 337 PEAK	Blank

Mode	37	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz	
ANT	3	
Pol.	Horizontal	Fundamental
Peak	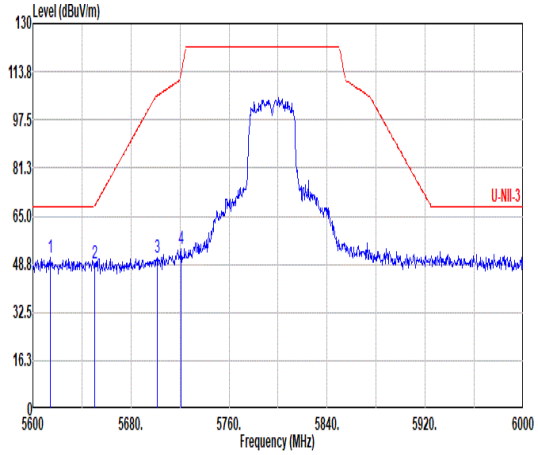 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5614.40 51.18 68.20 -17.02 41.96 34.47 11.02 36.27 0.00 367 0 PEAK 2 5650.40 49.20 68.50 -19.30 40.04 34.40 11.07 36.31 0.00 367 0 PEAK 3 5701.60 50.81 105.75 -54.94 41.71 34.31 11.14 36.35 0.00 367 0 PEAK 4 5720.80 54.16 112.72 -58.56 44.98 34.40 11.17 36.39 0.00 367 0 PEAK	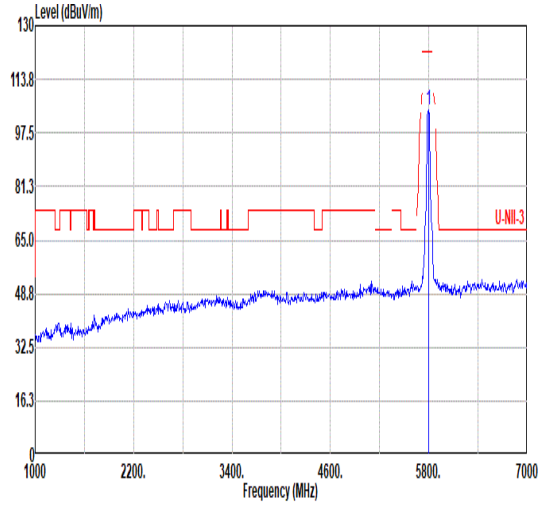 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 104.57 ------ ------ 95.02 34.80 11.28 36.53 0.00 367 0 PEAK
Avg	Blank	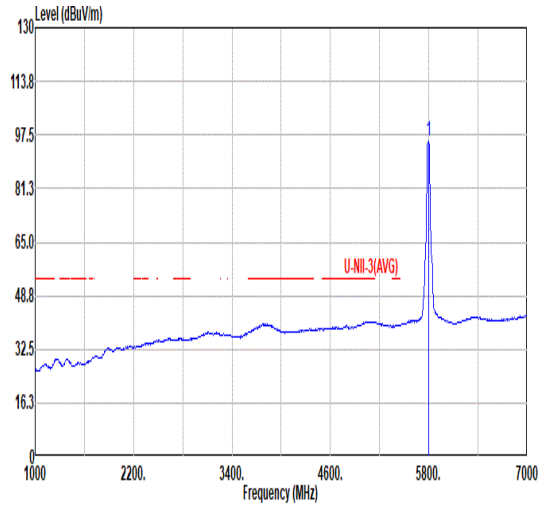 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 95.54 ------ ------ 86.02 34.77 11.27 36.52 0.00 367 0 AVERAGE

Mode	37	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz	
ANT	3	
Pol.	Horizontal	Fundamental
Peak	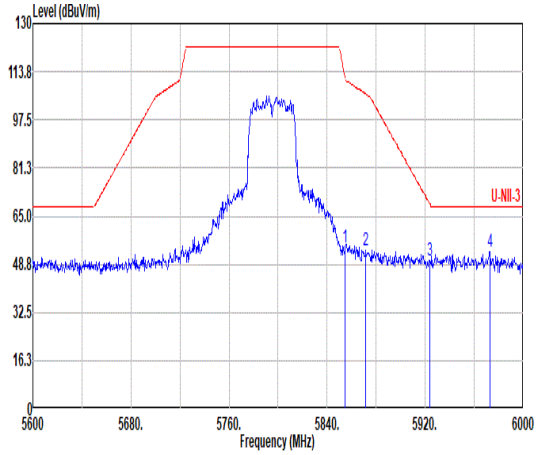 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 54.52 111.36 -56.84 44.96 34.85 11.34 36.63 0.00 367 0 PEAK 2 5871.60 53.33 106.25 -52.92 43.77 34.87 11.35 36.66 0.00 367 0 PEAK 3 5923.60 50.22 69.23 -19.01 40.67 34.97 11.40 36.82 0.00 367 0 PEAK 4 5972.80 53.21 68.20 -14.99 43.68 35.12 11.45 37.04 0.00 367 0 PEAK	Blank

Mode	37	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	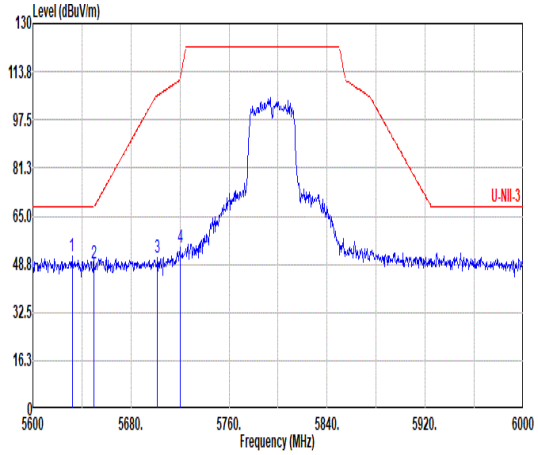 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5632.00 51.64 68.20 -16.56 42.44 34.44 11.05 36.29 0.00 114 339 PEAK 2 5650.00 49.25 68.20 -18.95 40.09 34.40 11.07 36.31 0.00 114 339 PEAK 3 5701.60 51.10 105.75 -54.65 42.00 34.31 11.14 36.35 0.00 114 339 PEAK 4 5720.00 54.61 110.90 -56.29 45.43 34.40 11.17 36.39 0.00 114 339 PEAK	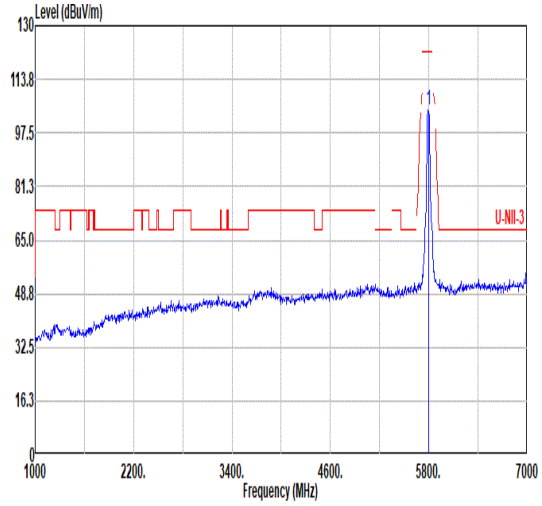 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 104.44 ------ ------ 94.95 34.74 11.26 36.51 0.00 114 339 PEAK
Avg	Blank	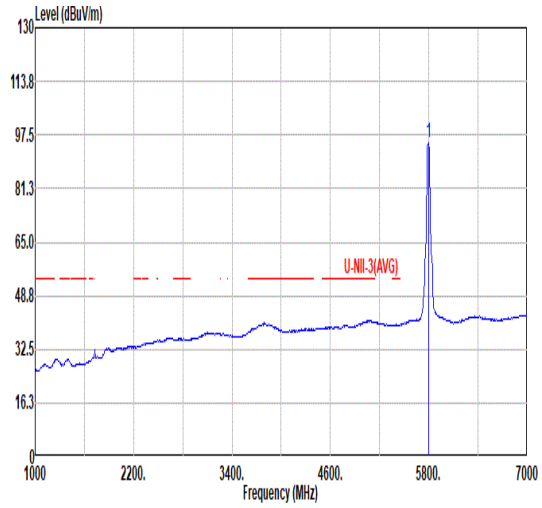 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 95.33 ------ ------ 85.81 34.77 11.27 36.52 0.00 114 339 AVERAGE

Mode	37	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	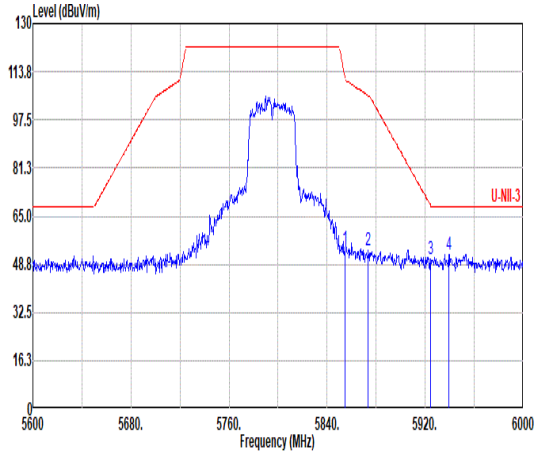 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 54.20 111.36 -57.16 44.64 34.85 11.34 36.63 0.00 114 339 PEAK 2 5873.60 53.38 105.69 -52.31 43.82 34.87 11.35 36.66 0.00 114 339 PEAK 3 5924.40 50.54 68.64 -18.10 40.99 34.97 11.40 36.82 0.00 114 339 PEAK 4 5939.20 52.16 68.20 -16.04 42.61 35.02 11.42 36.89 0.00 114 339 PEAK	Blank

Mode	37	
	Harmonic	
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak Avg	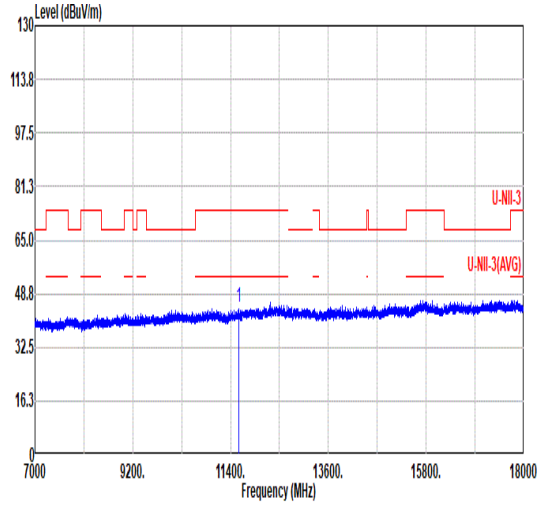 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11590.00 44.56 74.00 -29.44 56.33 38.33 16.42 66.52 0.00 --- --- PEAK	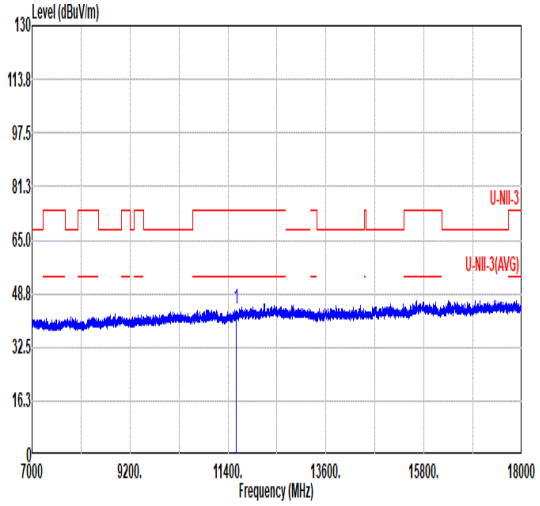 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11590.00 44.22 74.00 -29.78 55.99 38.33 16.42 66.52 0.00 --- --- PEAK

Mode	38	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz	
ANT	3	
Pol.	Horizontal	Fundamental
Peak	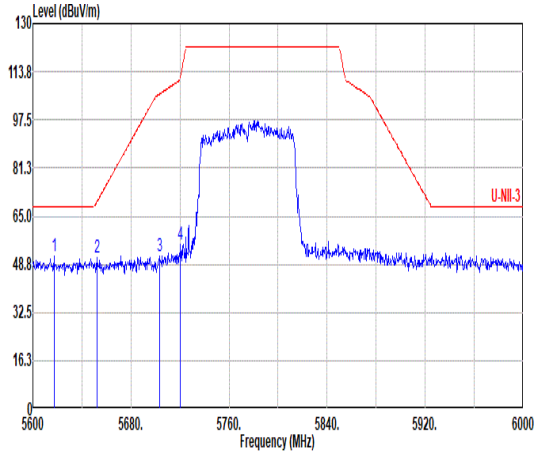 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5617.20 51.31 68.20 -16.89 42.09 34.47 11.03 36.28 0.00 259 301 PEAK 2 5652.40 50.96 69.99 -19.03 41.79 34.40 11.08 36.31 0.00 259 301 PEAK 3 5703.60 51.32 106.31 -54.99 42.21 34.32 11.15 36.36 0.00 259 301 PEAK 4 5720.40 55.60 111.81 -56.21 46.42 34.40 11.17 36.39 0.00 259 301 PEAK	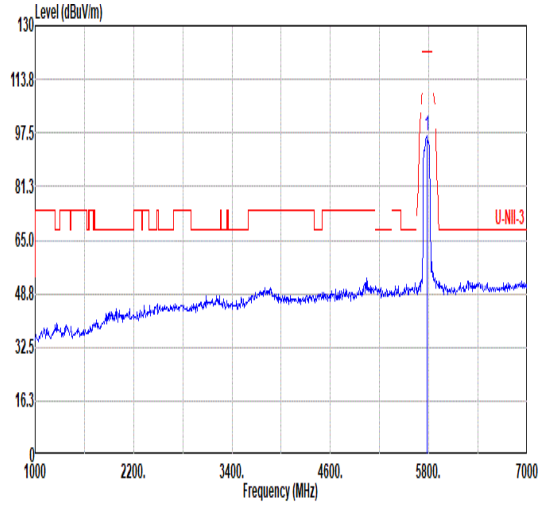 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 96.84 ------ ------ 87.40 34.68 11.25 36.49 0.00 259 301 PEAK
Avg	Blank	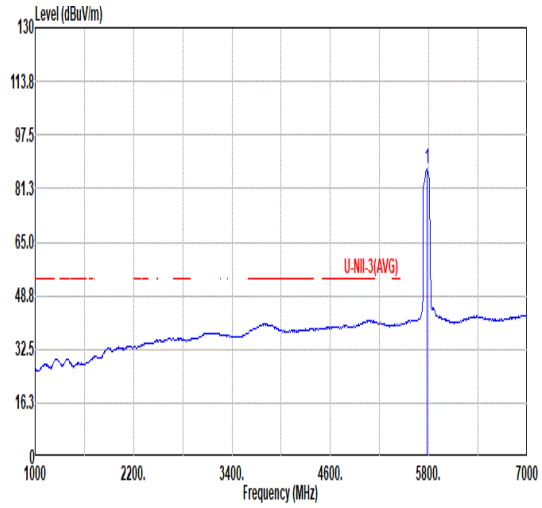 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 87.28 ------ ------ 77.81 34.71 11.26 36.50 0.00 259 301 AVERAGE

Mode	38	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz	
ANT	3	
Pol.	Horizontal	Fundamental
Peak	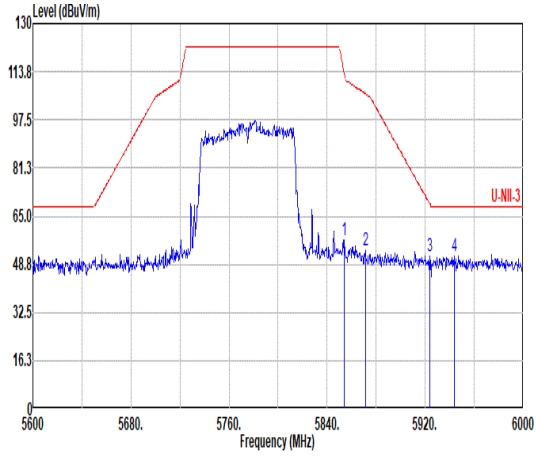 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.00 56.87 113.18 -56.31 47.32 34.85 11.33 36.63 0.00 259 301 PEAK 2 5871.20 53.26 106.36 -53.10 43.70 34.87 11.35 36.66 0.00 259 301 PEAK 3 5924.00 51.44 68.94 -17.50 41.89 34.97 11.40 36.82 0.00 259 301 PEAK 4 5943.60 51.39 68.20 -16.81 41.85 35.03 11.42 36.91 0.00 259 301 PEAK	Blank

Mode	38	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	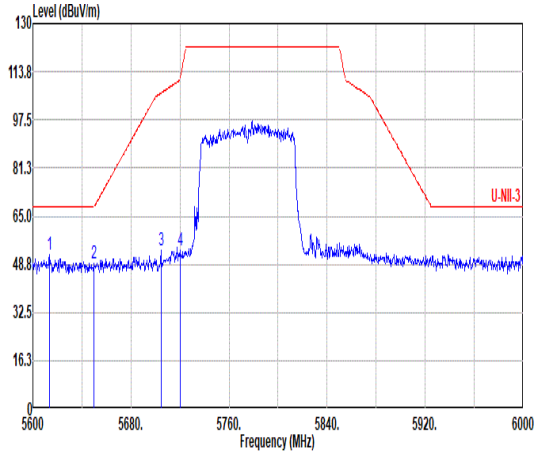 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5613.60 52.03 68.20 -16.17 42.81 34.47 11.02 36.27 0.00 112 340 PEAK 2 5650.00 48.84 68.20 -19.36 39.68 34.40 11.07 36.31 0.00 112 340 PEAK 3 5704.40 53.66 106.53 -52.87 44.55 34.32 11.15 36.36 0.00 112 340 PEAK 4 5720.00 53.25 110.90 -57.65 44.07 34.40 11.17 36.39 0.00 112 340 PEAK	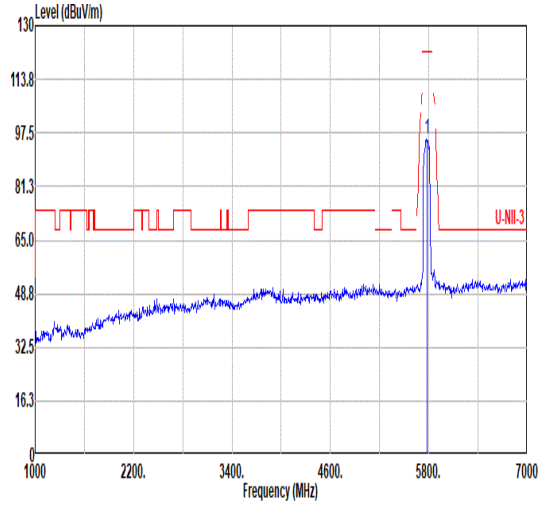 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 95.67 ------ ------ 86.26 34.65 11.24 36.48 0.00 112 340 PEAK
Avg	Blank	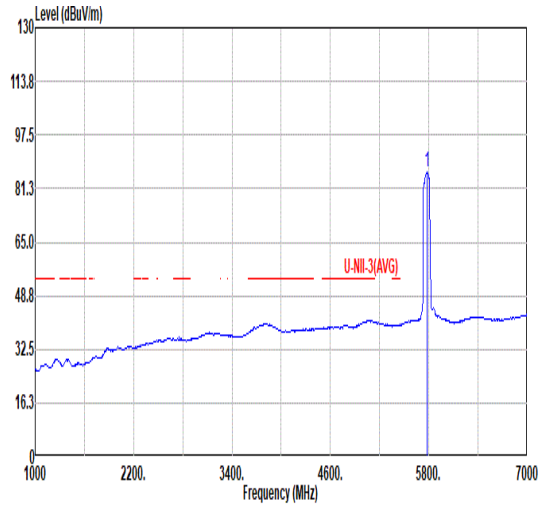 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 86.46 ------ ------ 76.99 34.71 11.26 36.50 0.00 112 340 AVERAGE

Mode	38	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	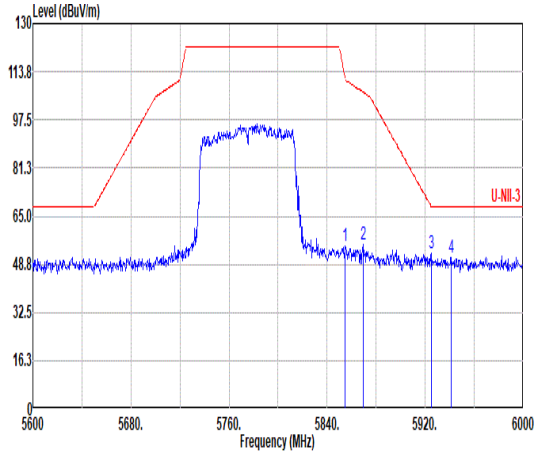 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 54.83 111.36 -56.53 45.27 34.85 11.34 36.63 0.00 112 340 PEAK 2 5869.60 55.45 106.81 -51.36 45.89 34.87 11.35 36.66 0.00 112 340 PEAK 3 5924.80 52.35 68.35 -16.00 42.80 34.97 11.40 36.82 0.00 112 340 PEAK 4 5941.20 51.18 68.20 -17.02 41.64 35.02 11.42 36.90 0.00 112 340 PEAK	Blank

Mode	38	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak Avg	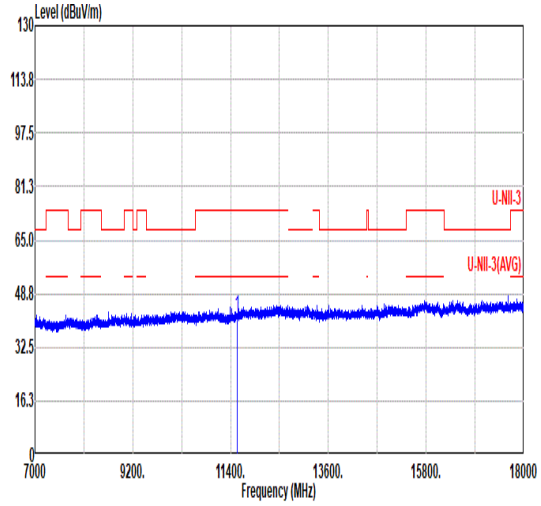 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11550.00 41.97 74.00 -32.03 53.83 38.29 16.39 66.54 0.00 --- --- PEAK	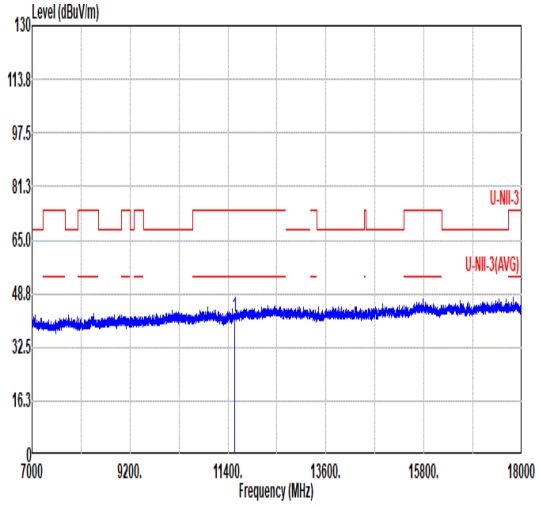 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11550.00 41.65 74.00 -32.35 53.51 38.29 16.39 66.54 0.00 --- --- PEAK

Mode	37	
	18G-40G	
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak Avg	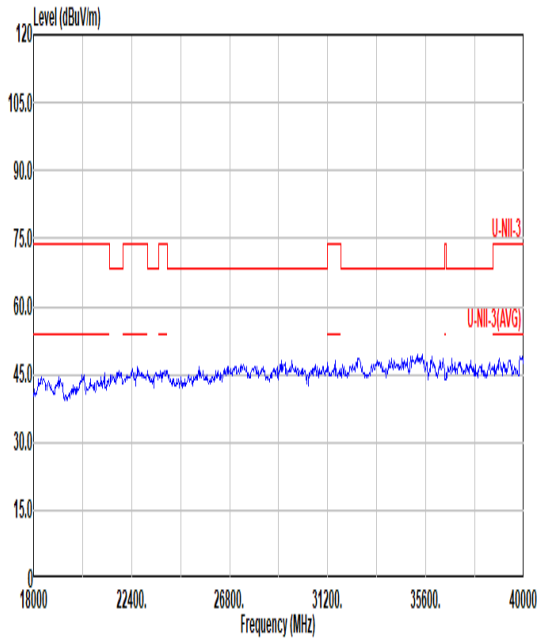	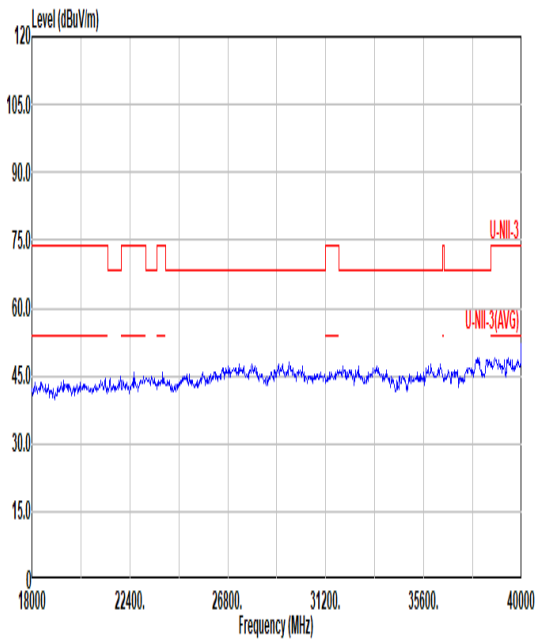

Mode	37	
	30-1G	
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak	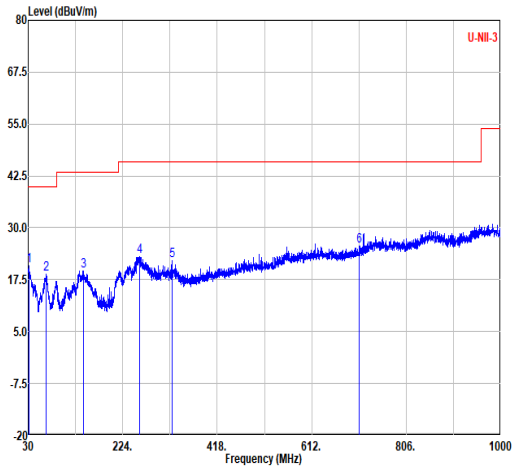	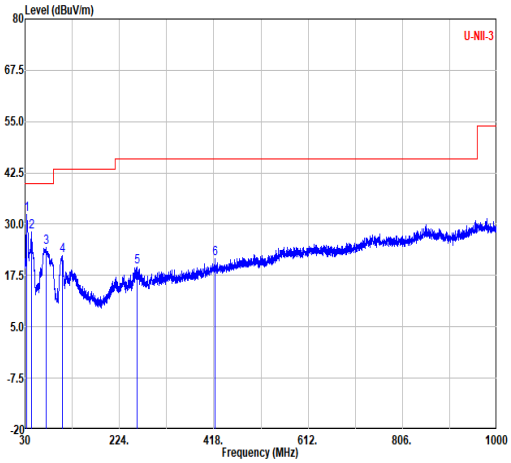

Horizontal:

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	30.97	20.84	40.00	-19.16	27.54	24.67	0.84	32.21	--	--	Peak
2	67.35	18.76	40.00	-21.24	37.53	11.99	1.25	32.01	--	--	Peak
3	143.73	19.72	43.50	-23.78	32.63	17.32	1.83	32.06	--	--	Peak
4	259.41	23.21	46.00	-22.79	32.93	19.72	2.47	31.91	--	--	Peak
5	325.61	22.02	46.00	-23.98	31.87	19.53	2.76	32.14	--	--	Peak
6	709.00	25.65	46.00	-20.35	27.30	26.60	4.06	32.31	--	--	Peak

Vertical:

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	33.64	32.32	40.00	-7.68	40.60	23.04	0.88	32.20	--	--	Peak
2	43.10	28.02	40.00	-11.98	41.29	17.92	1.00	32.19	--	--	Peak
3	72.92	24.27	40.00	-15.73	42.35	12.60	1.30	31.98	--	--	Peak
4	106.87	22.30	43.50	-21.20	36.06	16.72	1.58	32.06	--	--	Peak
5	260.86	19.71	46.00	-26.29	29.45	19.72	2.47	31.93	--	--	Peak
6	420.91	21.52	46.00	-24.48	28.15	22.45	3.13	32.21	--	--	Peak

Mode	39	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak Avg	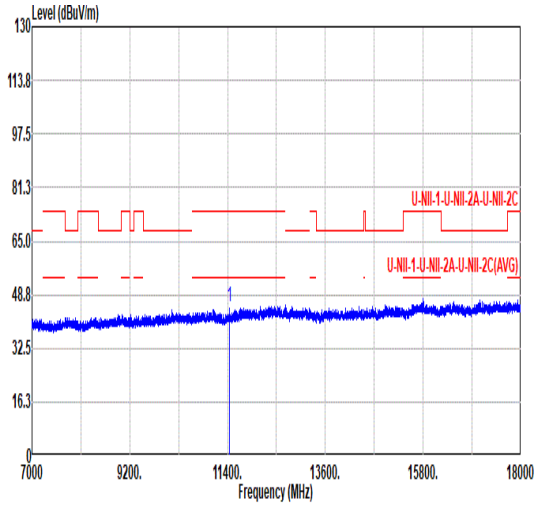 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11440.00 44.90 74.00 -29.10 56.97 38.20 16.32 66.59 0.00 --- --- PEAK	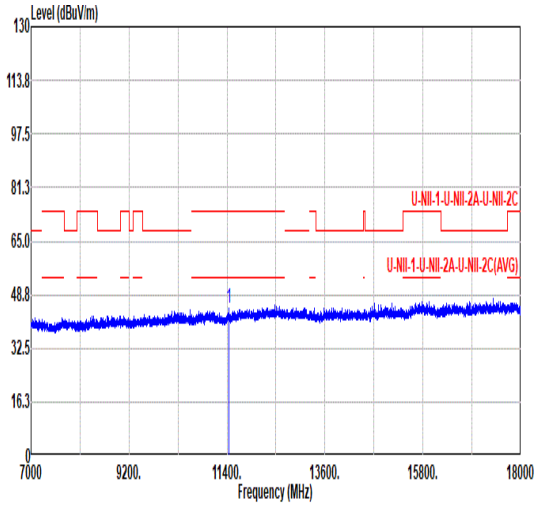 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11440.00 44.86 74.00 -29.14 56.93 38.20 16.32 66.59 0.00 --- --- PEAK

Mode	40	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT20_CH144_5720MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak Avg	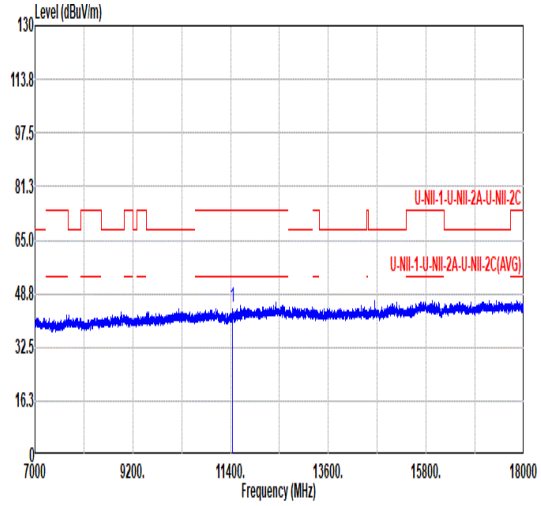 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11440.00 44.77 74.00 -29.23 56.84 38.20 16.32 66.59 0.00 --- --- PEAK	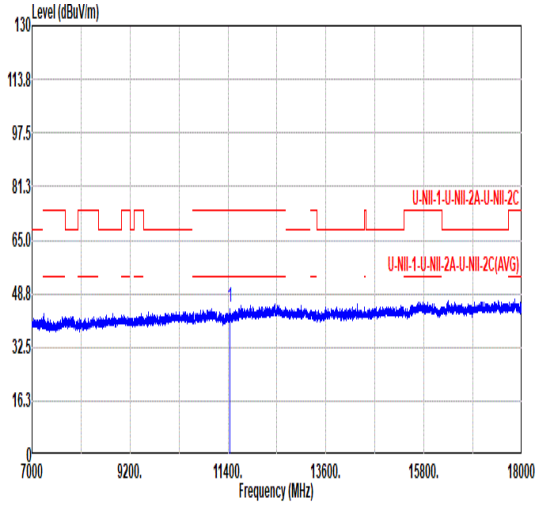 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11440.00 44.47 74.00 -29.53 56.54 38.20 16.32 66.59 0.00 --- --- PEAK

Mode	41	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT40_CH142_5710MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak Avg	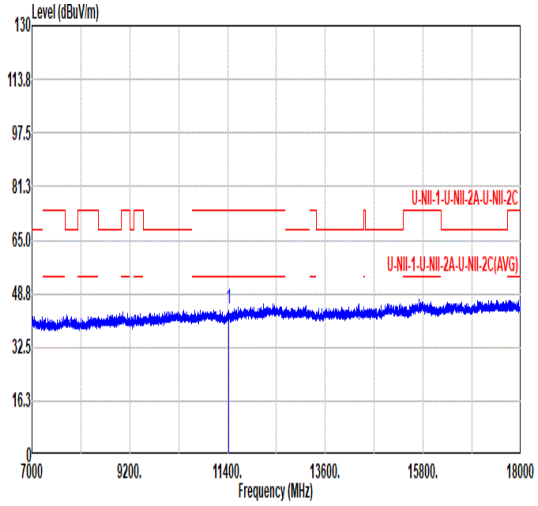 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11420.00 44.34 74.00 -29.66 56.44 38.18 16.31 66.59 0.00 --- --- PEAK	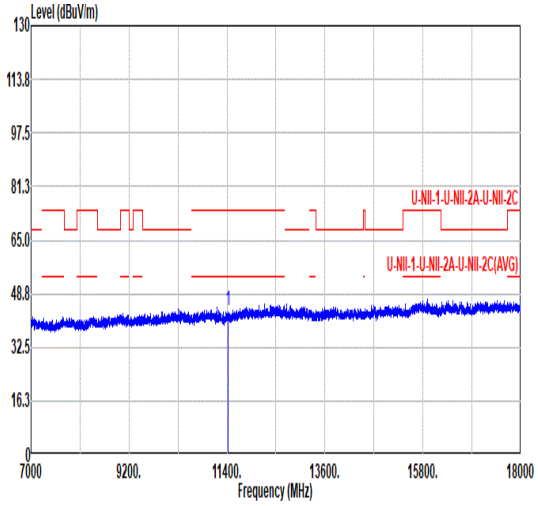 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11420.00 43.44 74.00 -30.56 55.54 38.18 16.31 66.59 0.00 --- --- PEAK

Mode	42	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH138_5690MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak Avg	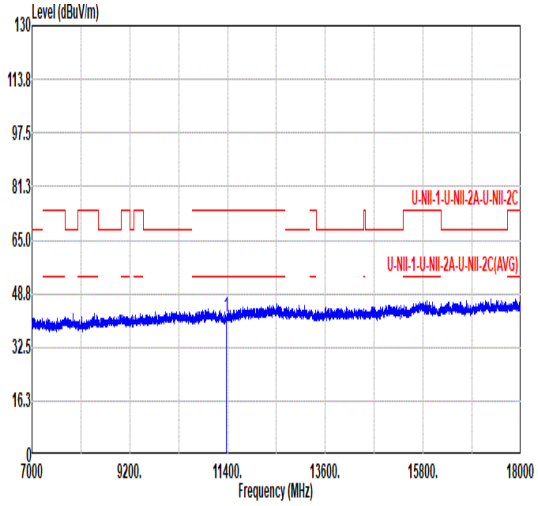 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11380.00 41.57 74.00 -32.43 53.73 38.14 16.29 66.59 0.00 --- --- PEAK	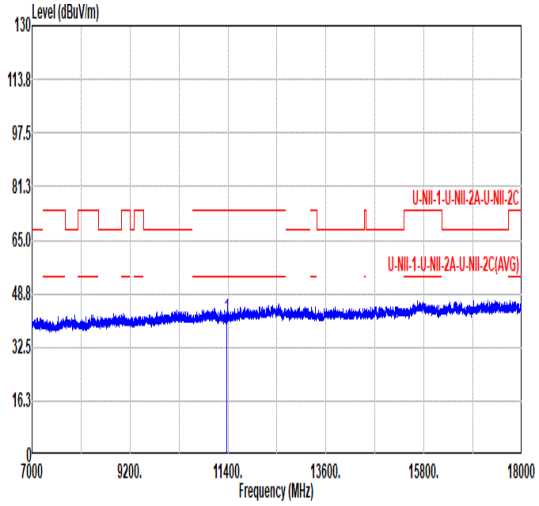 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11380.00 41.20 74.00 -32.80 53.36 38.14 16.29 66.59 0.00 --- --- PEAK

For Co-location mode:

Mode	43	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz	
ANT	3	
Pol.	Horizontal	Fundamental
Peak	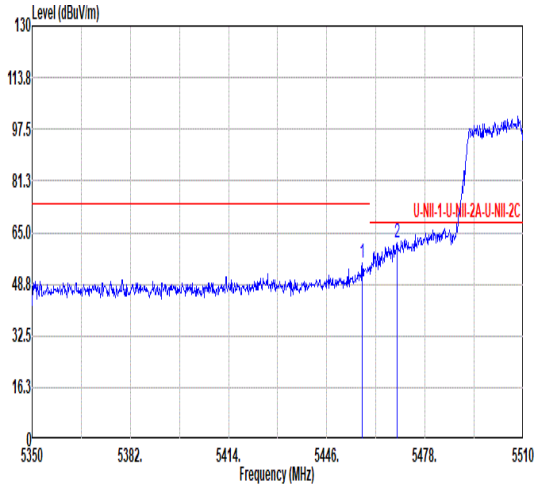 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5457.52 55.20 74.00 -18.80 46.46 34.34 10.84 36.44 0.00 294 345 PEAK 2 5468.88 61.57 68.20 -6.63 52.84 34.33 10.85 36.45 0.00 294 345 PEAK	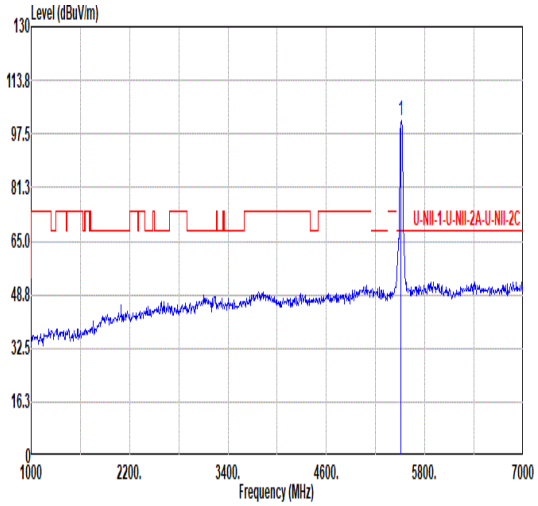 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 101.60 ------ ------ 92.78 34.34 10.91 36.43 0.00 294 345 PEAK
Avg	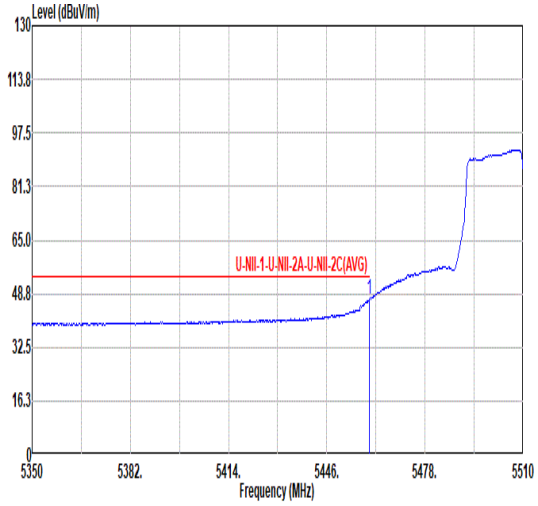 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.92 47.00 54.00 -7.00 38.26 34.34 10.84 36.44 0.00 294 345 AVERAGE	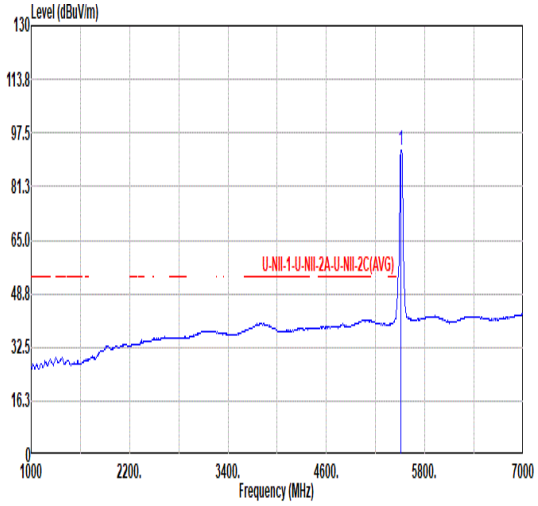 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 92.20 ------ ------ 83.42 34.32 10.90 36.44 0.00 294 345 AVERAGE

Mode	43	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz	
ANT	3	
Pol.	Horizontal	Fundamental
Peak	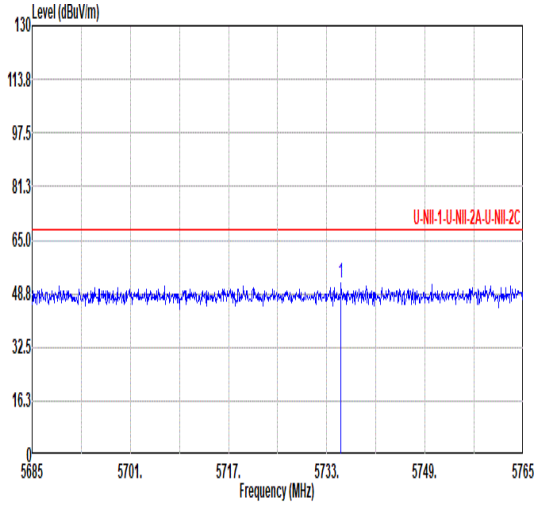 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5735.32 51.87 68.20 -16.33 42.61 34.48 11.19 36.41 0.00 294 345 PEAK	Blank

Mode	43	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	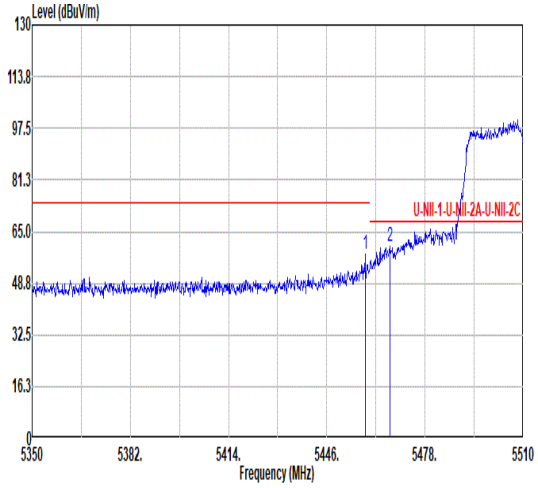 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.48 57.94 74.00 -16.06 49.20 34.34 10.84 36.44 0.00 131 321 PEAK 2 5466.48 60.32 68.20 -7.88 51.59 34.33 10.85 36.45 0.00 131 321 PEAK	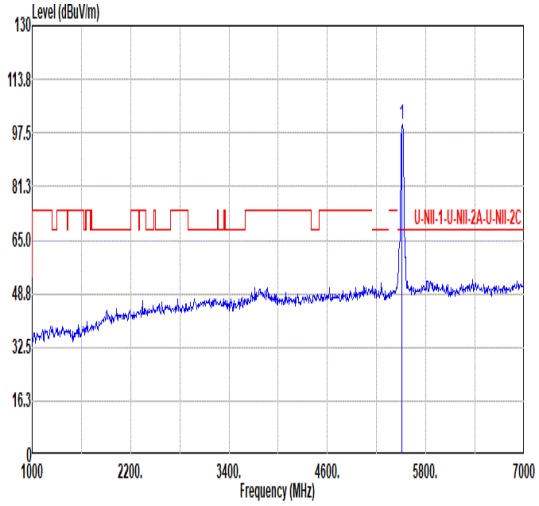 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 100.01 ------ ------ 91.19 34.34 10.91 36.43 0.00 131 321 PEAK
Avg	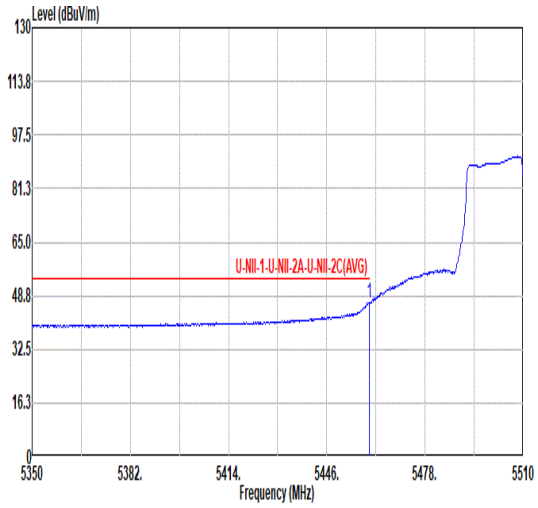 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.92 46.51 54.00 -7.49 37.77 34.34 10.84 36.44 0.00 131 321 AVERAGE	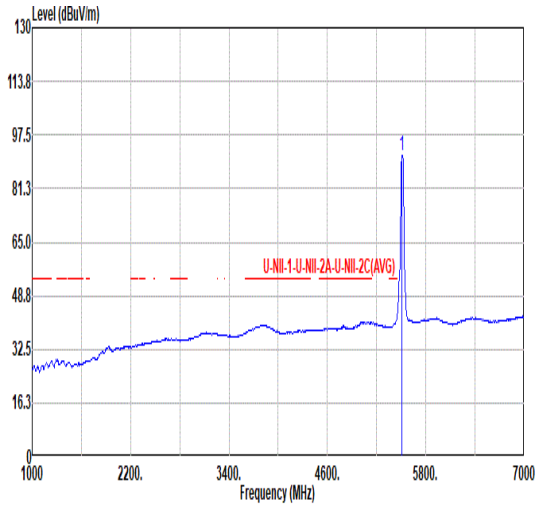 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 91.26 ------ ------ 82.48 34.32 10.90 36.44 0.00 131 321 AVERAGE

Mode	43	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz	
ANT	3	
Pol.	Vertical	Fundamental
Peak	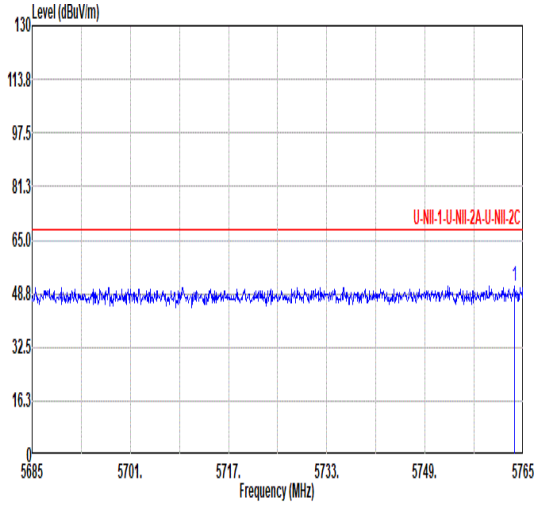 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5763.64 51.10 68.20 -17.10 41.71 34.62 11.23 36.46 0.00 131 321 PEAK	Blank

Mode	43	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak Avg	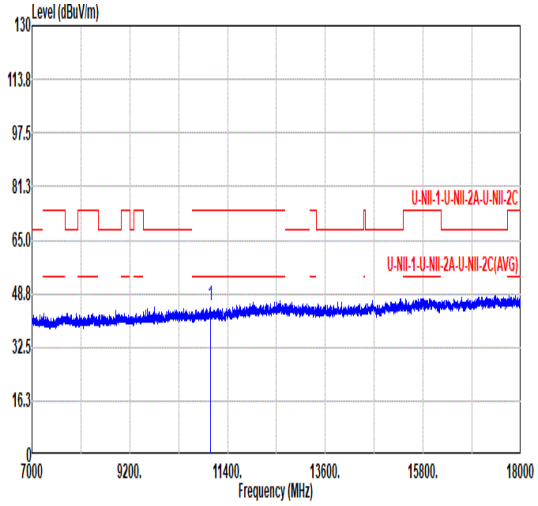 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11020.00 45.11 74.00 -28.89 57.86 37.82 16.06 66.63 0.00 --- --- PEAK	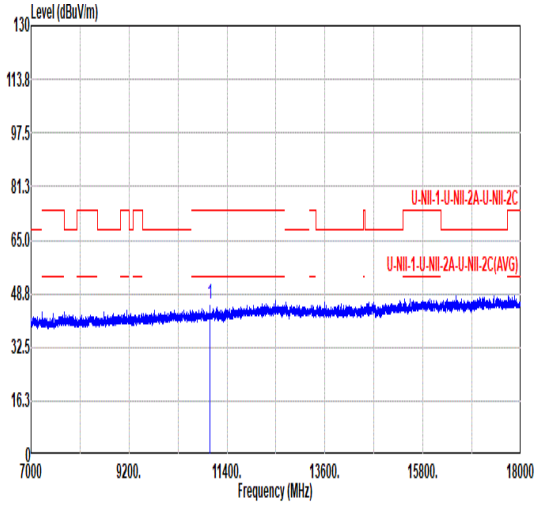 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11020.00 45.66 74.00 -28.34 58.41 37.82 16.06 66.63 0.00 --- --- PEAK

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	98.08	-	-	10Hz
802.11n HT20	97.95	1.910	0.524	0.56kKHz
802.11n HT40	95.90	0.935	1.070	1.1KHz
802.11ac VHT80	92.74	0.460	2.174	2.2kHz

802.11a

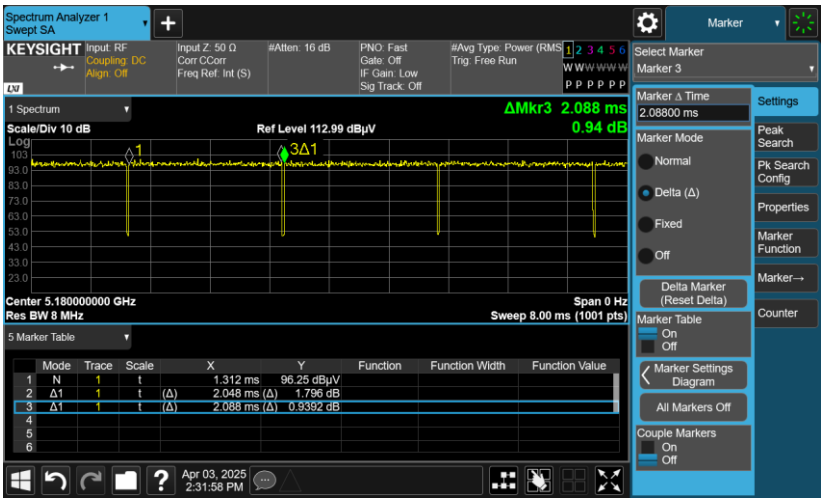

802.11n HT20

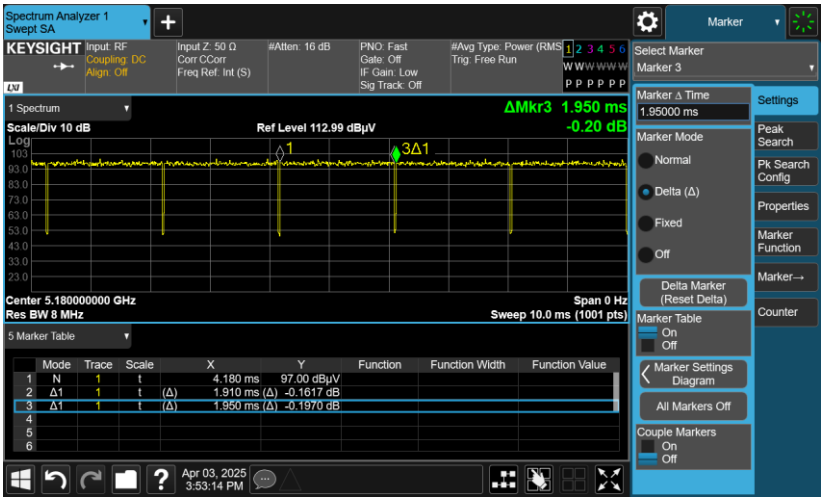

802.11n HT40

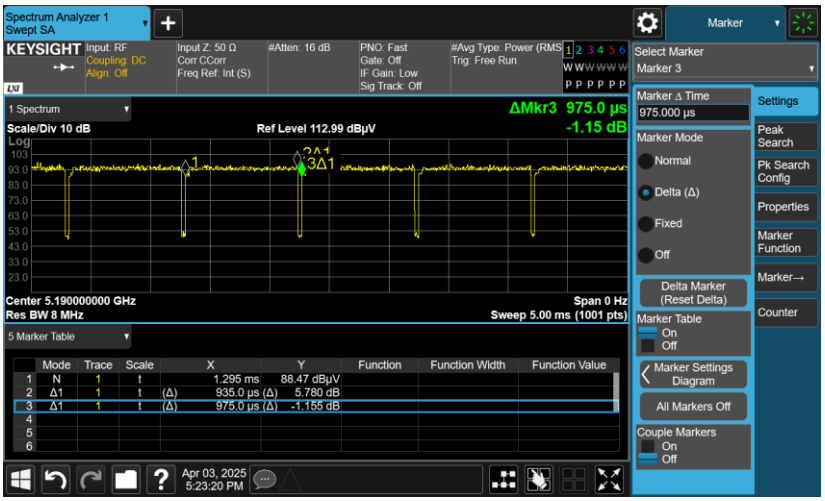
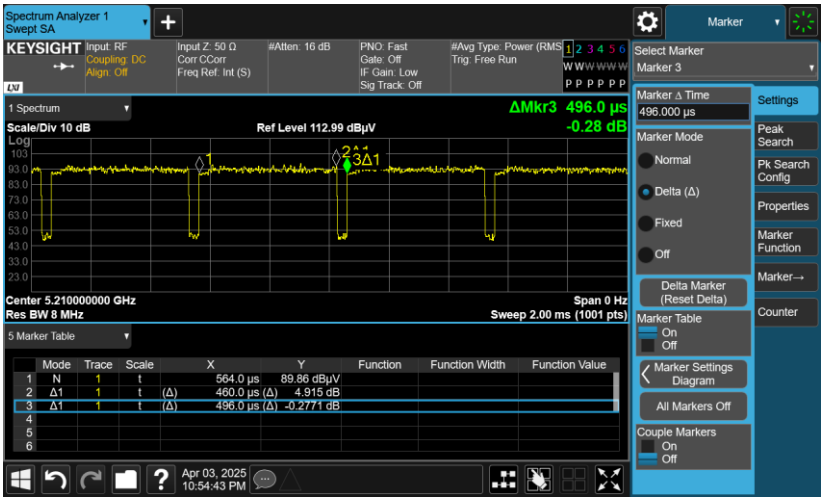
802.11ac VHT80