



FCC RF Test Report

APPLICANT : Rolling Wireless S.a r.l.
EQUIPMENT : 5G module
BRAND NAME : Rolling Wireless
MODEL NAME : RW350R-GL
FCC ID : 2AX2URW350RGL
STANDARD : 47 CFR Part 2, 96
CLASSIFICATION : Citizens Band End User Devices (CBE)
EQUIPMENT TYPE : End User Equipment
TEST DATE(S) : Mar. 27, 2024 ~ Apr. 29, 2024

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test.....	5
1.4 Maximum Conducted Power and Emission Designator	6
1.5 Testing Site.....	8
1.6 Test Software	8
1.7 Applied Standards	9
2 Test Configuration of Equipment Under Test	10
2.1 Test Mode.....	10
2.2 Connection Diagram of Test System	12
2.3 Support Unit used in test configuration	12
2.4 Measurement Results Explanation Example	12
2.5 Frequency List of Low/Middle/High Channels.....	13
3 Conducted Test Items.....	16
3.1 Measuring Instruments.....	16
3.2 Test Setup	16
3.3 Conducted Output Power	17
3.4 EIRP	19
3.5 Occupied Bandwidth	20
3.6 Conducted Band Edge	21
3.7 Conducted Spurious Emission	22
3.8 Frequency Stability	23
4 Radiated Test Items	24
4.1 Measuring Instruments.....	24
4.2 Test Setup	24
4.3 Test Result of Radiated Test.....	25
4.4 Radiated Spurious Emission	26
5 List of Measuring Equipment.....	27
6 Measurement Uncertainty	28
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FG430728H	01	Initial issue of report	Jun. 13, 2024



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.3	§2.1046	Conducted Output Power	Reporting only	-
-	§96.41	Peak-to-Average Ratio	Not Applicable	Not applicable for End User Devices
3.4	§96.41	Maximum E.I.R.P	Pass	-
		Maximum Power Spectral Density	Not Applicable	Not applicable for End User Devices
3.5	§2.1049 §96.41	Occupied Bandwidth	Reporting only	-
3.6	§2.1051 §96.41	Conducted Band Edge Measurement Adjacent Channel Leakage Ratio	Pass	-
3.7	§2.1051 §96.41	Conducted Spurious Emission	Pass	
3.8	§2.1055	Frequency Stability for Temperature & Voltage	Pass	-
4.4	§2.1051 §96.41	Radiated Spurious Emission	Pass	Under limit 12.05 dB at 10875.00 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Rolling Wireless S.a r.l.

8-10, rue Mathias Hardt 1717, Luxembourg

1.2 Manufacturer

Rolling Wireless S.a r.l.

8-10, rue Mathias Hardt 1717, Luxembourg

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	5G module
Brand Name	Rolling Wireless
Model Name	RW350R-GL
FCC ID	2AX2URW350RGL
Tx/Rx Frequency	LTE Band 42 : 3550 MHz ~ 3600 MHz LTE Band 43 : 3600 MHz ~ 3700 MHz LTE Band 48: 3550 MHz ~ 3700 MHz
Bandwidth	5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	LTE Band 42: 21.40 dBm LTE CA_42C: 20.74 dBm LTE Band 43: 21.29 dBm LTE Band 48: 21.54 dBm LTE CA_48C : 20.55 dBm
Antenn Type	External Monopole Antenna or External PIFA Antenna
Antenna Gain	LTE Band 42: 1 dBi LTE Band 43: 1 dBi LTE Band 48: 1 dBi
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM
IMEI Code	Conducted: 356413950001474 Radiation: 356413950000682
HW Version	V1.1
SW Version	81601.0000.00.29.24.13
EUT Stage	Identical Prototype

Remark:

1. The device has two optional antennas, they are same antenna gain, RSE pretest the two antennas, choose worst antenna to perform final test and recorded in the report.
2. There are two samples under test, sample 1 is 1st source and sample 2 is 2nd source, the detailed differences could be referred to the RW350R-GL_Operational Description of Product Equality Declaration which is exhibit separately. According to the differences, sample 1 perform full test, sample 2 verify conducted power and found less than sample 1, and sample 2 additional verify the worst case of RSE.



1.4 Maximum Conducted Power and Emission Designator

LTE Band 42		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)
5	3552.5~3597.5	0.1352	4M50G7D	0.1102	4M50W7D
10	3555.0~3595.0	0.1371	9M03G7D	0.1081	9M05W7D
15	3557.5~3592.5	0.1377	13M4G7D	0.1074	13M4W7D
20	3560.0~3590.0	0.1380	17M9G7D	0.1089	17M9W7D

LTE Band 43		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)
5	3602.5~3697.5	0.1355	4M50G7D	0.1035	4M50W7D
10	3605.0~3695.0	0.1349	9M03G7D	0.1054	9M05W7D
15	3607.5~3692.5	0.1321	13M4G7D	0.1050	13M4W7D
20	3610.0~3690.0	0.1346	17M9G7D	0.1047	17M9W7D

LTE Band 48		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)
5	3552.5~3697.5	0.1380	4M50G7D	0.1107	4M50W7D
10	3555~3695	0.1390	9M03G7D	0.1127	9M05W7D
15	3557.5~3692.5	0.1400	13M4G7D	0.1096	13M4W7D
20	3560~3690	0.1426	17M9G7D	0.1135	17M9W7D



LTE Band 42 CA	QPSK		16QAM/64QAM/256QAM	
BW (MHz) Frequency (MHz)	Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)
5MHz+20MHz	0.1197	23M1G7D	0.0984	23M1W7D
10MHz+20MHz	0.1172	27M9G7D	0.0982	27M9W7D
15MHz+20MHz	0.1183	32M8G7D	0.0966	32M7W7D
20MHz+5MHz	0.1175	23M3G7D	0.0957	23M3W7D
20MHz+10MHz	0.1202	27M9G7D	0.0979	27M9W7D
20MHz+15MHz	0.1183	32M7G7D	0.0955	32M8W7D
20MHz+20MHz	0.1156	37M5G7D	0.0920	37M6W7D

LTE Band 48 CA	QPSK		16QAM/64QAM/256QAM	
BW (MHz) Frequency (MHz)	Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)
5MHz+20MHz	0.1117	23M1G7D	0.0863	23M1W7D
10MHz+20MHz	0.1122	27M9G7D	0.0857	27M9W7D
15MHz+20MHz	0.1091	32M8G7D	0.0861	32M7W7D
20MHz+5MHz	0.1109	23M3G7D	0.0859	23M3W7D
20MHz+10MHz	0.1104	27M9G7D	0.0867	27M9W7D
20MHz+15MHz	0.1102	32M7G7D	0.0881	32M8W7D
20MHz+20MHz	0.1161	37M5G7D	0.0991	37M6W7D

Note:

1. LTE Band 48 overlaps the entire frequency range of Band 42/43, and Band 48 power > Band 42/43 power, therefore the conducted test results of Band 48 provided in this report cover Band 42/43.
2. LTE Band CA_48C overlaps the entire frequency range of Band CA_42C, and Band 48C power > Band 42C power, therefore the conducted test results of Band 48C provided in this report cover Band 42C.
3. All modulations have been tested, only the worst test results of PSK & QAM are shown in the report.



1.5 Testing Site

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-SZ	CN1256	421272

1.6 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH03-SZ	AUDIX	E3	6.2009-8-24



1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 2, 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 940660 D01 Part 96 CBRS v03
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.


For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

Test Items	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16 QAM	64 QAM	256 QAM	1	Half	Full	L	M	H
Max. Output Power	42	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	43	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	48	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Adjacent Channel Leakage Ratio	48	-	-	v	v	v	v	v	v	v		v		v	v	v	v
26dB and 99% Bandwidth	48	-	-	v	v	v	v	v	v					v		v	
Conducted Band Edge	48	-	-	v	v	v	v	v	v	v		v		v	v	v	v
Conducted Spurious Emission	48	-	-	v	v	v	v	v				v		v	v	v	v
E.I.R.P	42	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	43	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	48	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Frequency Stability	48	-	-		v			v				v				v	
Radiated Spurious Emission	48	Worst Case													v	v	v
Remark	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported..																



Test Items	Band	Bandwidth (MHz)								Modulation				RB #			Test Channel		
		20+20	20+15	15+20	20+10	10+20	10+10	20+5	5+20	QPSK	16QAM	64 QAM	256 QAM	1	Half	Full	L	M	H
Max. Output Power	42C/48C	v	v	v	v	v	-	v	v	v	v	v	v	v			v	v	v
26dB and 99% Bandwidth	48C	v	v	v	v	v	-	v	v	v	v					v		v	
Conducted Band Edge	48C	v	v	v	v	v	-	v	v	v	v	v		v		v	v	v	v
Conducted Spurious Emission	48C	v	v	v	v	v	-	v	v	v				v			v	v	v
Adjacent Channel Leakage Ratio	48C	v	v	v	v	v	-	v	v	v	v	v		v		v	v	v	v
E.I.R.P.	42C/48C	v	v	v	v	v	-	v	v	v	v	v	v	v			v	v	v
Radiated Spurious Emission	48C	Worst Cases																v	
Note	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. All test items are based on engineering evaluation. 5. For QAM modulation mode, the whole testing has assessed 16QAM&64QAM mode by referring to the higher conducted power.																		

2.2 Connection Diagram of Test System

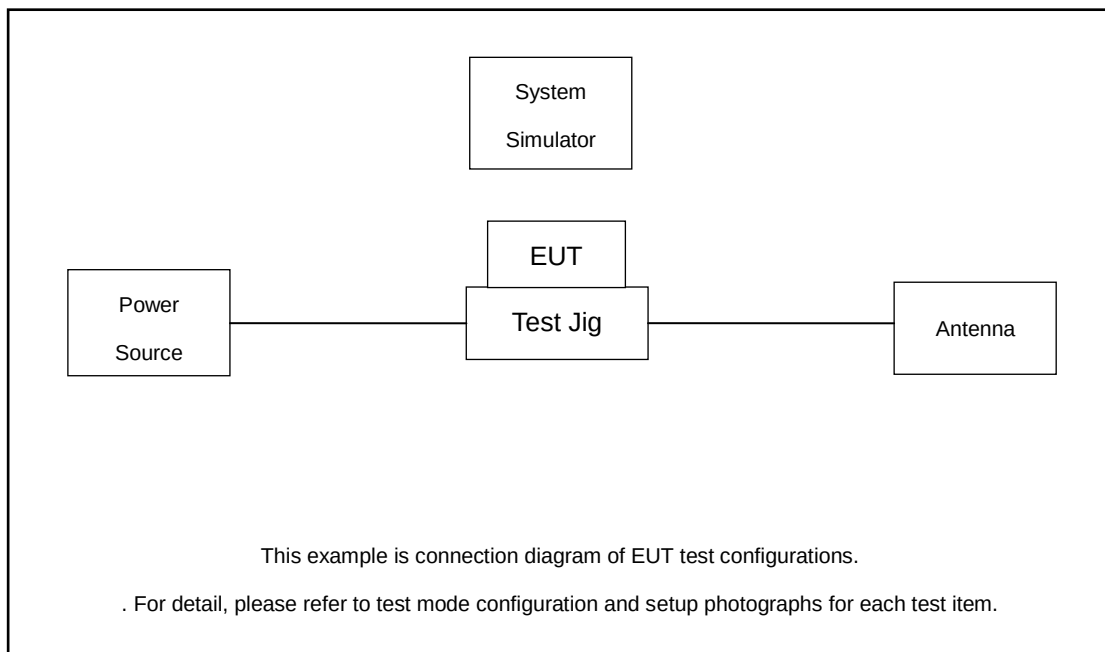

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	Fixture	INTEL	NGFF Card Carrier	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.5 dB and 10dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 5.5 + 10 = 15.5 \text{ (dB)}
 \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 48 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	55340	55990	56640
	Frequency	3560.0	3625.0	3690.0
15	Channel	55315	55990	56665
	Frequency	3557.5	3625.0	3692.5
10	Channel	55290	55990	56690
	Frequency	3555.0	3625.0	3695.0
5	Channel	55265	55990	56715
	Frequency	3552.5	3625.0	3697.5

LTE Band 42 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	43190	43340	43490
	Frequency	3560	3575	3590
15	Channel	43165	43340	43515
	Frequency	3557.5	3575	3592.5
10	Channel	43140	43340	43540
	Frequency	3555	3575	3595
5	Channel	43115	43340	43565
	Frequency	3552.5	3575	3597.5

LTE Band 43 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	43690	44090	44490
	Frequency	3610	3650	3690
15	Channel	43665	44090	44515
	Frequency	3607.5	3650	3692.5
10	Channel	43640	44090	44540
	Frequency	3605	3650	3695
5	Channel	43615	44090	44565
	Frequency	3602.5	3650	3697.5



LTE Band 48C_CA Channel and Frequency List					
BW [MHz]	Channel/Frequency(MHz)		Lowest	Middle	Highest
5 + 20	PCC	Channel	55273	55898	56523
		Frequency	3553.3	3615.8	3678.3
	SCC	Channel	55390	56015	56640
		Frequency	3565	3627.5	3690
20 + 5	PCC	Channel	55340	55965	56590
		Frequency	3560	3622.5	3685
	SCC	Channel	55457	56082	56707
		Frequency	3571.7	3634.2	3696.7
10 + 20	PCC	Channel	55295	55896	56496
		Frequency	3555.5	3615.6	3675.6
	SCC	Channel	55439	56040	56640
		Frequency	3569.9	3630	3690
20 + 10	PCC	Channel	55340	55941	56541
		Frequency	3560	3620.1	3680.1
	SCC	Channel	55484	56085	56685
		Frequency	3574.4	3634.5	3694.5
15 + 20	PCC	Channel	55318	55893	56469
		Frequency	3557.8	3615.3	3672.9
	SCC	Channel	55489	56064	56640
		Frequency	3574.9	3632.4	3690
20 + 15	PCC	Channel	55340	55916	56491
		Frequency	3560	3617.6	3675.1
	SCC	Channel	55511	56087	56662
		Frequency	3577.1	3634.7	3692.2
20 + 20	PCC	Channel	55340	55891	56442
		Frequency	3560	3615.1	3670.2
	SCC	Channel	55538	56089	56640
		Frequency	3579.8	3634.9	3690



LTE Band 42C_CA Channel and Frequency List					
BW [MHz]	Channel/Frequency(MHz)		Lowest	Middle	Highest
20 + 20	PCC	Channel	43190	43340	43292
		Frequency	3560	3575	3570.2
	SCC	Channel	43388	43538	43490
		Frequency	3579.8	3594.8	3590
20 + 15	PCC	Channel	43190	43340	43344
		Frequency	3560	3575	3575.4
	SCC	Channel	43361	43511	43515
		Frequency	3577.1	3592.1	3592.5
15 + 20	PCC	Channel	43165	43340	43319
		Frequency	3557.5	3575	3572.9
	SCC	Channel	43336	43511	43490
		Frequency	3574.6	3592.1	3590
20 + 10	PCC	Channel	43190	43340	43396
		Frequency	3560	3575	3580.6
	SCC	Channel	43334	43484	43540
		Frequency	3574.4	3589.4	3595
10 + 20	PCC	Channel	43140	43340	43346
		Frequency	3555	3575	3575.6
	SCC	Channel	43284	43484	43490
		Frequency	3569.4	3589.4	3590
20 + 5	PCC	Channel	43190	43340	43448
		Frequency	3560	3575	3585.8
	SCC	Channel	43307	43457	43565
		Frequency	3571.7	3586.7	3597.5
5 + 20	PCC	Channel	43115	43340	43373
		Frequency	3552.5	3575	3578.3
	SCC	Channel	43232	43457	43490
		Frequency	3564.2	3586.7	3590


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power / ACLR

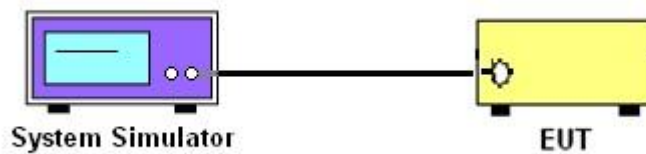

3.2.2 26dB & 99% Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

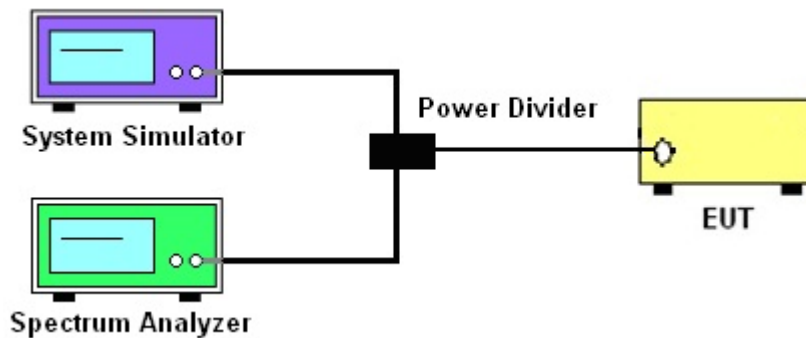

3.2.3 Frequency Stability

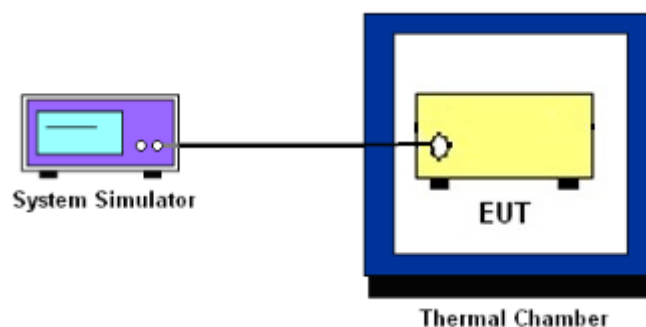

3.2.4 Test Result of Conducted Test

Please refer to Appendix A.



3.3 Conducted Output Power

3.3.1 Description of the Conducted Output Power Measurement





A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.3.2 Test Procedures



1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.3.3 Test Procedures for LTE ULCA

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter PCC & SCC output ports were connected to the system simulator.
3. Set EUT at maximum power, set the PCC/SCC CA band, channel, bandwidth and RB config.

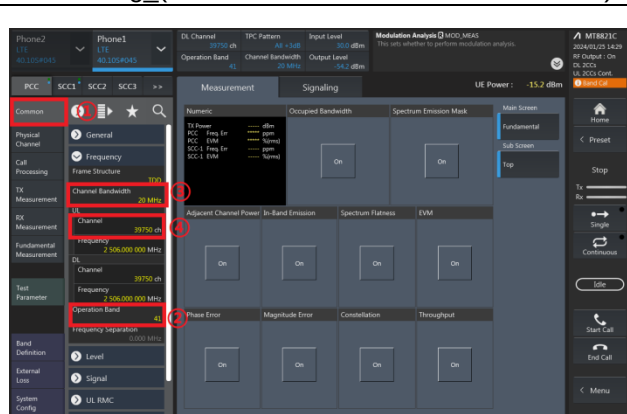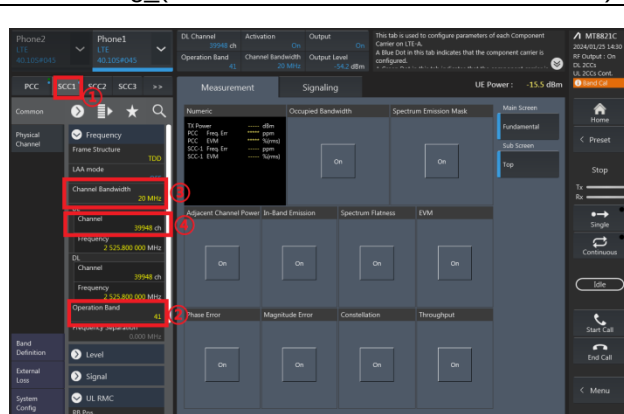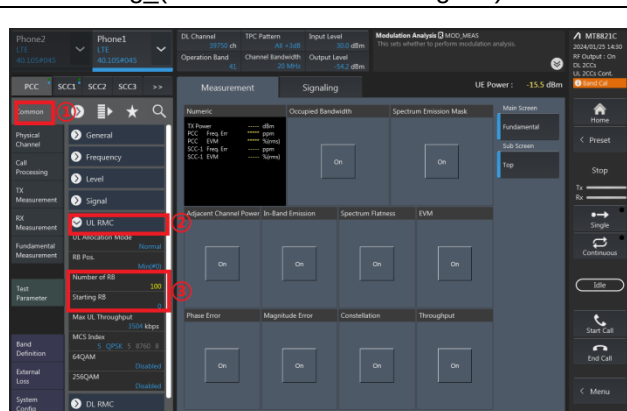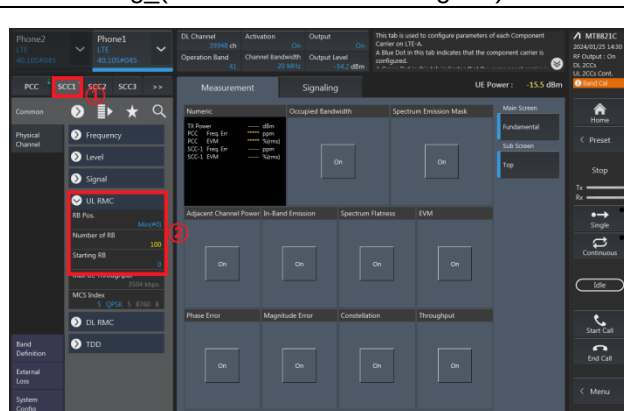PCC config_(Channel Bandwidth / Channel / Band)

SCC config_(Channel Bandwidth / Channel / Band)

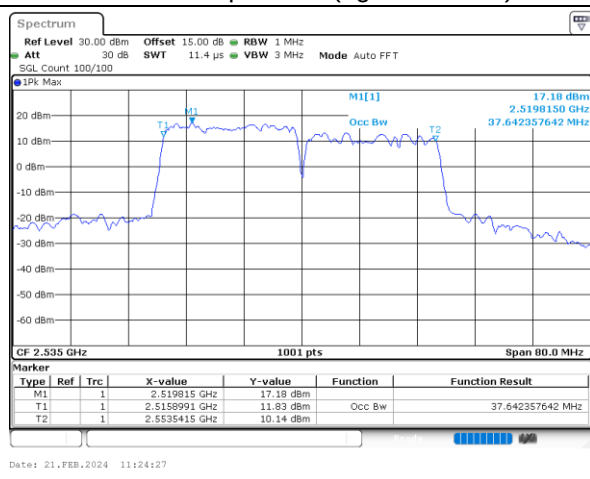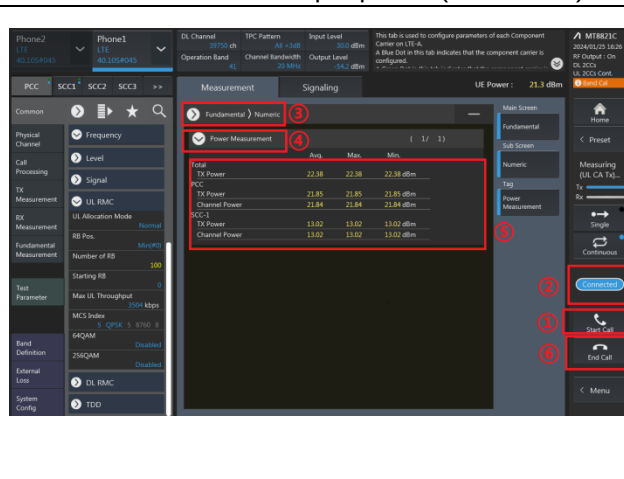PCC config_(Number of RB / Starting RB)

SCC config_(Number of RB / Starting RB)


4. Select lowest, middle, and highest channels for each ULCA band and different modulation.
5. Check the ULCA spectrum and record the total power from the system simulator.

Check the ULCA spectrum (eg. 20M+20M)

Read the Total UL CA output power (PCC+SCC)


3.4 EIRP

3.4.1 Description of the EIRP Measurement

EIRP limits for CBRS equipment as below table:

Device		Maximum EIRP (dBm/10 MHz)	Maximum PSD (dBm/MHz)
Applied	End User Device	23	n/a
☐	Category A CBSD	30	20
☐	Category B CBSD	47	37

Remark: The worst case EIRP shown in this section is found with LTE operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for LTE Band 48 (i.e. 5, 10, 15, 20MHz)

3.4.2 Test Procedures for EIRP

1. Establishing a communications link with the call box (Base station) to measure the Maximum conducted power, the parameters were set to force the EUT transmitting at maximum output power level. Use the average power measurement function to measure total channel power of each channel bandwidth (per ANSI C63.26-2015 Section 5.2.1)
2. Determining ERP and/or EIRP from conducted RF output power measurements (Per ANSI C63.26-2015 Section 5.2.5.5)

$$\text{EIRP} = P_T + G_T - L_C, \text{ ERP} = \text{EIRP} - 2.15, \text{ where}$$

$$P_T = \text{transmitter output power in dBm}$$

$$G_T = \text{gain of the transmitting antenna in dBi}$$

$$L_C = \text{signal attenuation in the connecting cable between the transmitter and antenna in dB}$$



3.5 Occupied Bandwidth

3.5.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.5.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.6 Conducted Band Edge

3.6.1 Description of Conducted Band Edge Measurement

Part 96.41 (e) (1) (ii)

For End User Devices the emission limits outside the fundamental are as follows:

Within 0 MHz to B MHz above and below the assigned channel ≤ -13 dBm/MHz

Greater than B MHz above and below the assigned channel ≤ -25 dBm/MHz

where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device.

Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

Part 96.41 (e) (2)

For CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

9. The EUT was connected to spectrum analyzer and system simulator via a power divider.
10. The band edges of low and high channels for the highest RF powers were measured.
11. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
12. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
13. Offset has included the duty factor for LTE Band 48. Duty factor $=10 \log (1/x)$, where x is the measured duty cycle.
14. Set spectrum analyzer with RMS detector.
15. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



3.7 Conducted Spurious Emission

3.7.1 Description of Conducted Spurious Emission Measurement

96.41 (e)(2)

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

3.7.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is -40dBm/MHz.



3.8 Frequency Stability

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.8.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

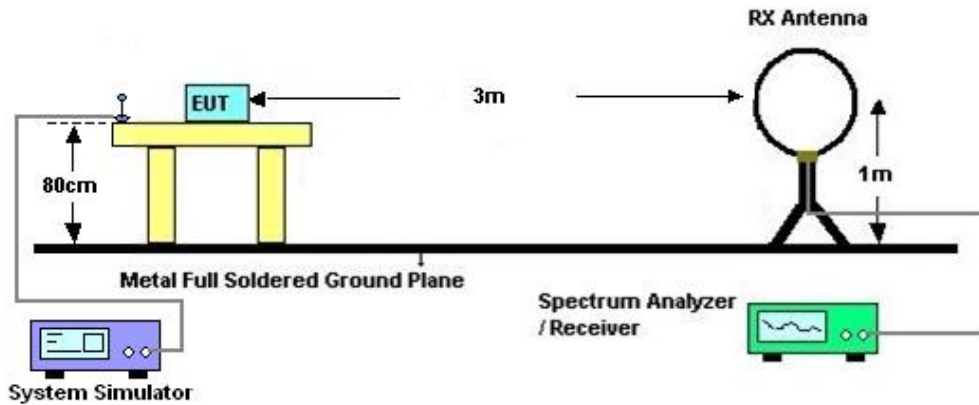

4.2.2 For radiated test from 30MHz to 1GHz

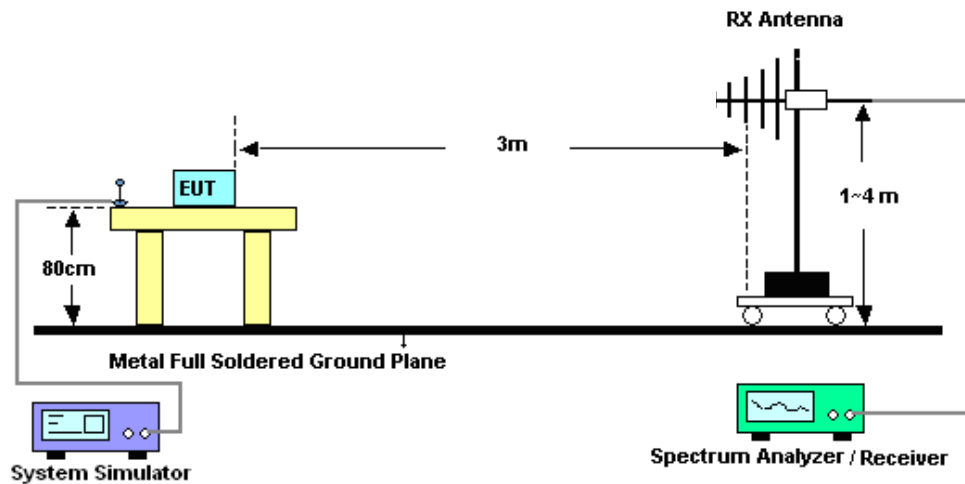

4.2.3 For radiated test above 1GHz

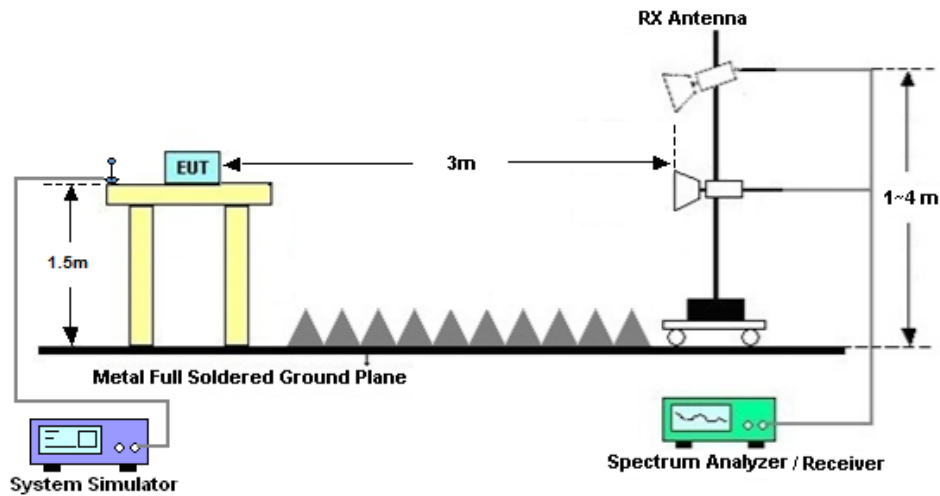

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI C63.26-2015.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
The limit line is -40dBm/MHz



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101915	10Hz~40GHz	Jul. 05, 2023	Mar. 27, 2024~ Apr. 06, 2024	Jul. 04, 2024	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct. 16, 2023	Mar. 27, 2024~ Apr. 06, 2024	Oct. 15, 2024	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-0426 5	60.06.020. 0077	0.4GHz~26.5G Hz	Dec. 25, 2023	Mar. 27, 2024~ Apr. 06, 2024	Dec. 24, 2024	Conducted (TH01-SZ)
Power Divider	SOLVANG TECHNOLOY	STI08-0055	-	Max 40GHz	Mar. 20, 2024	Mar. 27, 2024~ Apr. 06, 2024	Mar. 19, 2025	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangrou p	LP-150U	H2014081 803	-40~+150°C	Jul. 05, 2023	Mar. 27, 2024~ Apr. 06, 2024	Jul. 04, 2024	Conducted (TH01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY544500 83	20Hz~8.4GHz	Apr. 09, 2024	Apr. 29, 2024	Apr. 08, 2025	Radiation (03CH03-SZ)
EXA Spectrum Anaalyzer	KEYSIGHT	N9010A	MY551502 46	10Hz~44GHz;	Apr. 09, 2024	Apr. 29, 2024	Apr. 08, 2025	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 28, 2022	Apr. 29, 2024	Jun. 27, 2024	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz-2GHz	Aug. 20, 2023	Apr. 29, 2024	Aug. 19, 2025	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBE CK	BBHA9120D	9120D-135 5	1GHz~18GHz	Apr. 09, 2024	Apr. 29, 2024	Apr. 08, 2025	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 09, 2024	Apr. 29, 2024	Apr. 08, 2025	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz ~3000MHz	Oct. 18, 2023	Apr. 29, 2024	Oct. 17, 2024	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35- HG	1871923	18GHz~40GHz	Jul. 07, 2023	Apr. 29, 2024	Jul.06, 2024	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY395013 02	500MHz~26.5G Hz	Dec. 27, 2023	Apr. 29, 2024	Dec. 26, 2024	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002 729	N/A	Oct. 18, 2023	Apr. 29, 2024	Oct. 17, 2024	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Apr. 29, 2024	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Apr. 29, 2024	NCR	Radiation (03CH03-SZ)

NCR: No Calibration Required

6 Measurement Uncertainty

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 1.34 dB
Occupied Channel Bandwidth	± 0.012 MHz
Conducted Power	± 1.34 dB
Conducted Power Density	± 1.32 dB
Peak to Average Ratio	± 1.34 dB
Frequency Stability	± 1.3 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.0 dB
--	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.6 dB
--	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.8 dB
--	--------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Lorenzo Liu	Temperature :	24~26°C
		Relative Humidity :	50~53%

Conducted Output Power(Average power) and EIRP

LTE Band 42

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	EIRP(W)		
Channel				43190	43340	43490			
Frequency (MHz)				3560	3575	3590	L	M	H
20	QPSK	1	0	21.40	21.04	21.08	0.1738	0.1600	0.1614
20	QPSK	1	49	21.23	21.01	21.02	0.1671	0.1589	0.1592
20	QPSK	1	99	21.11	20.89	20.88	0.1626	0.1545	0.1542
20	QPSK	50	0	20.39	20.02	19.98	0.1377	0.1265	0.1253
20	QPSK	50	24	20.26	19.97	20.09	0.1337	0.1250	0.1285
20	QPSK	50	50	20.16	20.03	19.99	0.1306	0.1268	0.1256
20	QPSK	100	0	20.25	19.99	19.99	0.1334	0.1256	0.1256
20	16QAM	1	0	20.37	20.17	20.00	0.1371	0.1309	0.1259
20	64QAM	1	0	18.92	18.65	18.67	0.0982	0.0923	0.0927
20	256QAM	1	0	16.17	15.87	15.86	0.0521	0.0486	0.0485
Channel				43165	43340	43515	EIRP(W)		
Frequency (MHz)				3557.5	3575	3592.5	L	M	H
15	QPSK	1	0	21.39	21.02	21.06	0.1734	0.1592	0.1607
15	16QAM	1	0	20.31	20.16	20.05	0.1352	0.1306	0.1274
Channel				43140	43340	43540	EIRP(W)		
Frequency (MHz)				3555	3575	3595	L	M	H
10	QPSK	1	0	21.37	21.13	21.12	0.1726	0.1633	0.1629
10	16QAM	1	0	20.34	20.13	20.05	0.1361	0.1297	0.1274
Channel				43115	43340	43565	EIRP(W)		
Frequency (MHz)				3552.5	3575	3597.5	L	M	H
5	QPSK	1	0	21.31	21.10	21.06	0.1702	0.1622	0.1607
5	16QAM	1	0	20.42	20.14	20.02	0.1387	0.1300	0.1265



LTE Band 43

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	EIRP(W)		
Channel				43690	44090	44490			
Frequency (MHz)				3610	3650	3690	L	M	H
20	QPSK	1	0	21.29	20.85	21.24	0.1694	0.1531	0.1675
20	QPSK	1	49	21.19	20.83	21.09	0.1656	0.1524	0.1618
20	QPSK	1	99	20.94	20.65	20.90	0.1563	0.1462	0.1549
20	QPSK	50	0	20.14	19.90	20.21	0.1300	0.1230	0.1321
20	QPSK	50	24	19.99	19.73	20.07	0.1256	0.1183	0.1279
20	QPSK	50	50	20.06	19.77	19.97	0.1276	0.1194	0.1250
20	QPSK	100	0	20.05	19.77	20.08	0.1274	0.1194	0.1282
20	16QAM	1	0	20.20	19.94	20.15	0.1318	0.1242	0.1303
20	64QAM	1	0	18.74	18.55	18.85	0.0942	0.0902	0.0966
20	256QAM	1	0	15.95	15.66	15.91	0.0495	0.0463	0.0491
Channel				43665	44090	44515	EIRP(W)		
Frequency (MHz)				3607.5	3650	3692.5	L	M	H
15	QPSK	1	0	21.10	20.85	21.21	0.1622	0.1531	0.1663
15	16QAM	1	0	20.14	20.03	20.21	0.1300	0.1268	0.1321
Channel				43640	44090	44540	EIRP(W)		
Frequency (MHz)				3605	3650	3695	L	M	H
10	QPSK	1	0	21.18	20.90	21.30	0.1652	0.1549	0.1698
10	16QAM	1	0	20.21	19.96	20.23	0.1321	0.1247	0.1327
Channel				43615	44090	44565	EIRP(W)		
Frequency (MHz)				3602.5	3650	3697.5	L	M	H
5	QPSK	1	0	21.12	20.88	21.32	0.1629	0.1542	0.1706
5	16QAM	1	0	20.15	19.93	20.12	0.1303	0.1239	0.1294



LTE Band 48

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	EIRP(W)		
Channel				55340	55990	56640			
Frequency (MHz)				3560	3625	3690	L	M	H
20	QPSK	1	0	21.54	21.30	21.05	0.1795	0.1698	0.1603
20	QPSK	1	49	21.46	21.17	21.04	0.1762	0.1648	0.1600
20	QPSK	1	99	21.31	21.04	20.83	0.1702	0.1600	0.1524
20	QPSK	50	0	20.51	20.18	20.06	0.1416	0.1312	0.1276
20	QPSK	50	24	20.47	20.20	19.99	0.1403	0.1318	0.1256
20	QPSK	50	50	20.39	20.11	19.90	0.1377	0.1291	0.1230
20	QPSK	100	0	20.43	20.17	20.02	0.1390	0.1309	0.1265
20	16QAM	1	0	20.55	20.24	20.14	0.1429	0.1330	0.1300
20	64QAM	1	0	19.16	18.84	18.61	0.1038	0.0964	0.0914
20	256QAM	1	0	16.35	16.02	15.93	0.0543	0.0504	0.0493
Channel				55315	55990	56665	EIRP(W)		
Frequency (MHz)				3557.5	3625	3692.5	L	M	H
15	QPSK	1	0	21.46	21.28	20.95	0.1762	0.1690	0.1567
15	16QAM	1	0	20.40	20.17	20.06	0.1380	0.1309	0.1276
Channel				55290	55990	56690	EIRP(W)		
Frequency (MHz)				3555	3625	3695	L	M	H
10	QPSK	1	0	21.43	21.29	21.02	0.1750	0.1694	0.1592
10	16QAM	1	0	20.52	20.20	20.04	0.1419	0.1318	0.1271
Channel				55265	55990	56715	EIRP(W)		
Frequency (MHz)				3552.5	3625	3697.5	L	M	H
5	QPSK	1	0	21.40	21.28	20.96	0.1738	0.1690	0.1570
5	16QAM	1	0	20.44	20.15	20.12	0.1393	0.1303	0.1294



LTE CA_42C

Combination 20MHz+20MHz (100RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	20.63	0.1455
M	QPSK	1	Max	1	0	20.58	0.1439
H	QPSK	1	Max	1	0	20.60	0.1445
L	16QAM	1	Max	1	0	19.59	0.1146
M	16QAM	1	Max	1	0	19.59	0.1146
H	16QAM	1	Max	1	0	19.64	0.1159
L	64QAM	1	Max	1	0	17.59	0.0723
M	64QAM	1	Max	1	0	17.67	0.0736
H	64QAM	1	Max	1	0	17.62	0.0728
L	256QAM	1	Max	1	0	15.47	0.0444
M	256QAM	1	Max	1	0	15.58	0.0455
H	256QAM	1	Max	1	0	15.54	0.0451
Combination 20MHz+15MHz (100RB+75RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	20.73	0.1489
H	16QAM	1	Max	1	0	19.80	0.1202
Combination 15MHz+20MHz (100RB+75RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	20.73	0.1489
H	16QAM	1	Max	1	0	19.85	0.1216
Combination 20MHz+10MHz (100RB+50RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	20.80	0.1514
H	16QAM	1	Max	1	0	19.91	0.1233
Combination 10MHz+20MHz (50RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	20.69	0.1476
H	16QAM	1	Max	1	0	19.92	0.1236
Combination 20MHz+5MHz (100RB+25RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	20.70	0.1479
H	16QAM	1	Max	1	0	19.81	0.1205
Combination 5MHz+20MHz (25RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	20.78	0.1507
H	16QAM	1	Max	1	0	19.93	0.1239



LTE CA_48C

Combination 20MHz+20MHz (100RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	20.65	0.1462
M	QPSK	1	Max	1	0	20.28	0.1343
H	QPSK	1	Max	1	0	20.15	0.1303
L	16QAM	1	Max	1	0	19.96	0.1247
M	16QAM	1	Max	1	0	19.30	0.1072
H	16QAM	1	Max	1	0	19.11	0.1026
L	64QAM	1	Max	1	0	17.37	0.0687
M	64QAM	1	Max	1	0	17.18	0.0658
H	64QAM	1	Max	1	0	17.08	0.0643
L	256QAM	1	Max	1	0	15.48	0.0445
M	256QAM	1	Max	1	0	15.25	0.0422
H	256QAM	1	Max	1	0	15.11	0.0408
Combination 20MHz+15MHz (100RB+75RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	20.42	0.1387
L	16QAM	1	Max	1	0	19.45	0.1109
Combination 15MHz+20MHz (100RB+75RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	20.38	0.1374
L	16QAM	1	Max	1	0	19.35	0.1084
Combination 20MHz+10MHz (100RB+50RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	20.43	0.1390
L	16QAM	1	Max	1	0	19.38	0.1091
Combination 10MHz+20MHz (50RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	20.50	0.1413
L	16QAM	1	Max	1	0	19.33	0.1079
Combination 20MHz+5MHz (100RB+25RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	20.45	0.1396
L	16QAM	1	Max	1	0	19.34	0.1081
Combination 5MHz+20MHz (25RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	20.48	0.1406
L	16QAM	1	Max	1	0	19.36	0.1086




LTE Band 48

26dB Bandwidth


Mode	LTE Band 48 : 26dB BW(MHz)							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	4.86	4.91	9.65	9.63	14.27	14.39	19.06	18.70

LTE Band 48


Middle Channel / 5MHz / QPSK

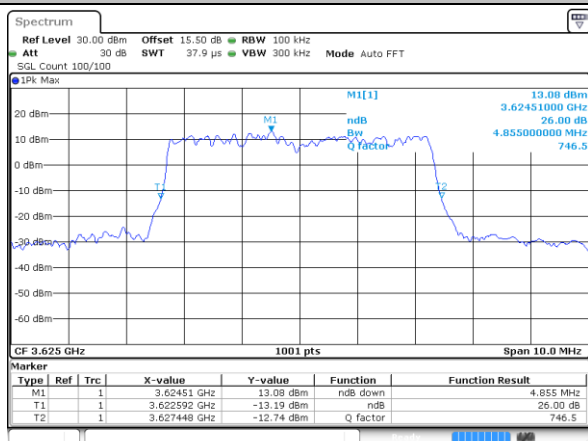


Middle Channel / 5MHz / 16QAM

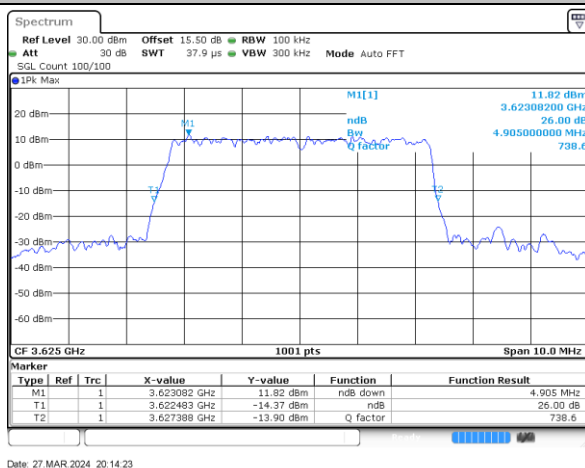

Middle Channel / 10MHz / QPSK

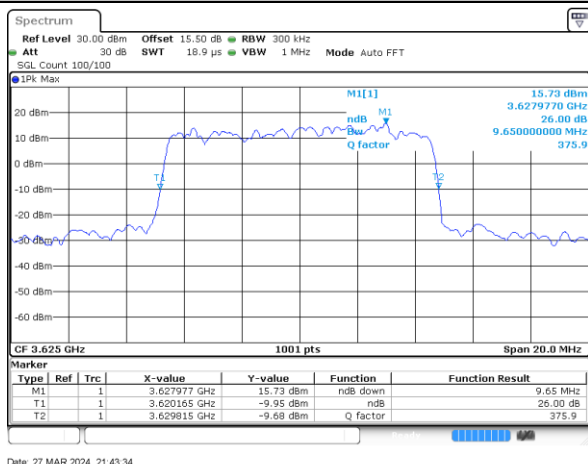


Middle Channel / 10MHz / 16QAM

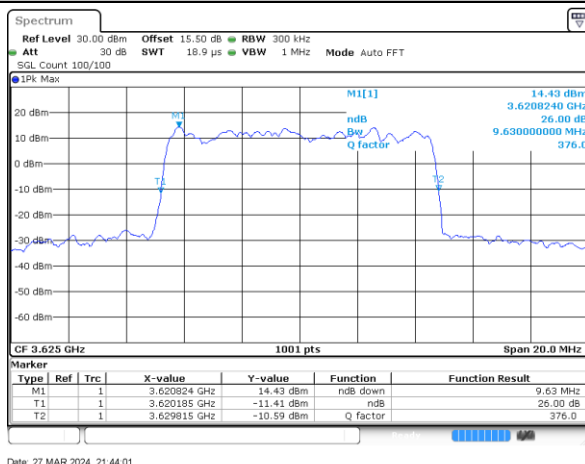




Middle Channel / 15MHz / QPSK

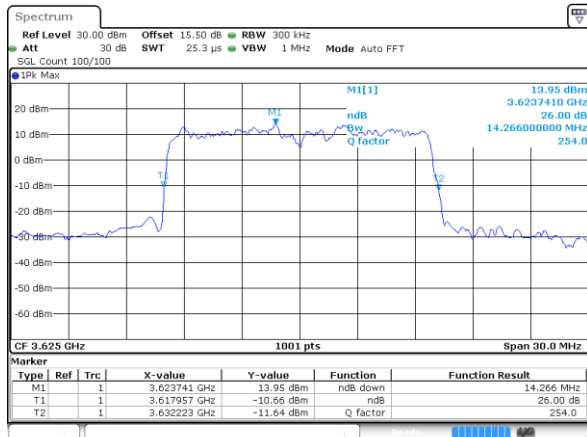

Date: 27 MAR 2024 23:13:29


Middle Channel / 15MHz / 16QAM

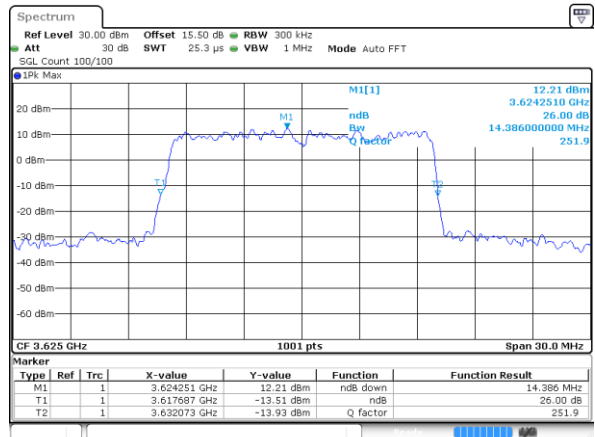

Date: 27 MAR 2024 23:13:56


LTE Band 48

Middle Channel / 20MHz / QPSK

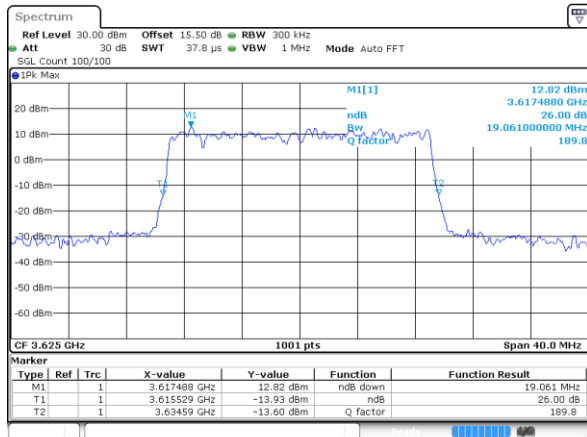

Date: 28 MAR 2024 08:48:15

Middle Channel / 20MHz / 16QAM

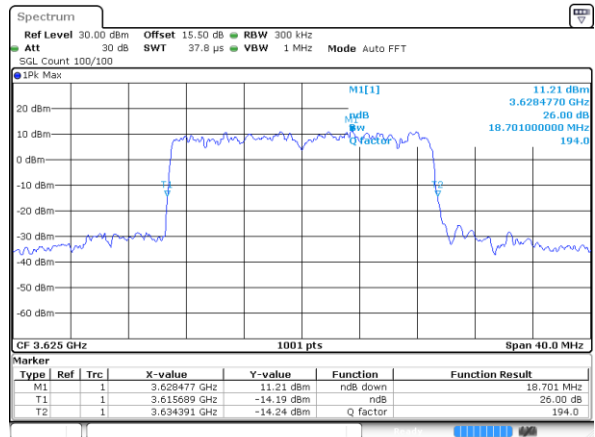

Date: 28 MAR 2024 00:42:42




Occupied Bandwidth


Mode	LTE Band 48 : 99%OBW(MHz)							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	4.50	4.50	9.03	9.05	13.43	13.40	17.86	17.86

LTE Band 48


Middle Channel / 5MHz / QPSK

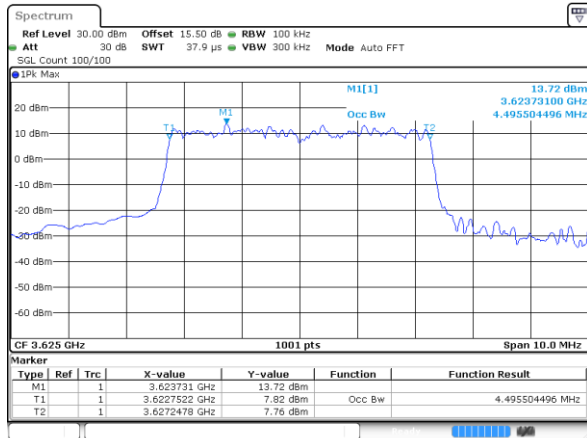


Middle Channel / 5MHz / 16QAM

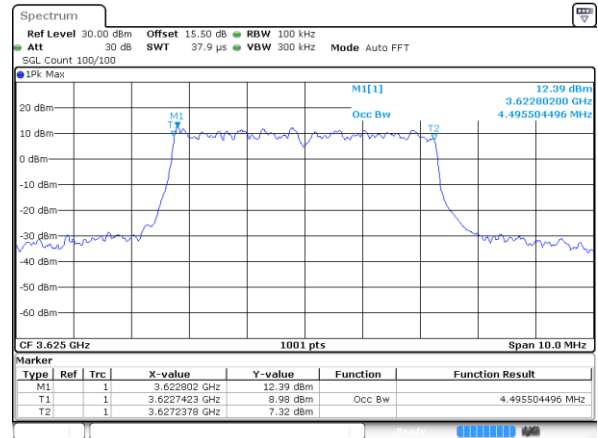

Middle Channel / 10MHz / QPSK

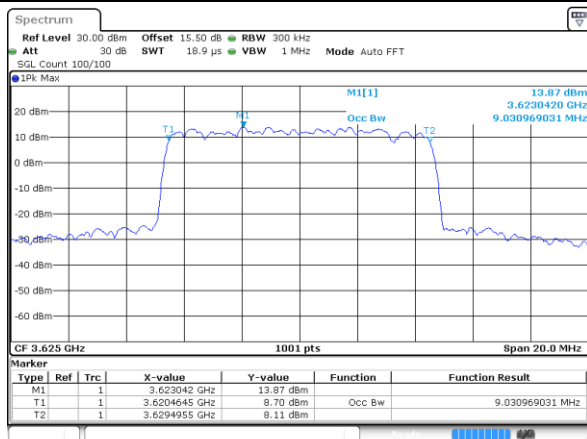


Middle Channel / 10MHz / 16QAM

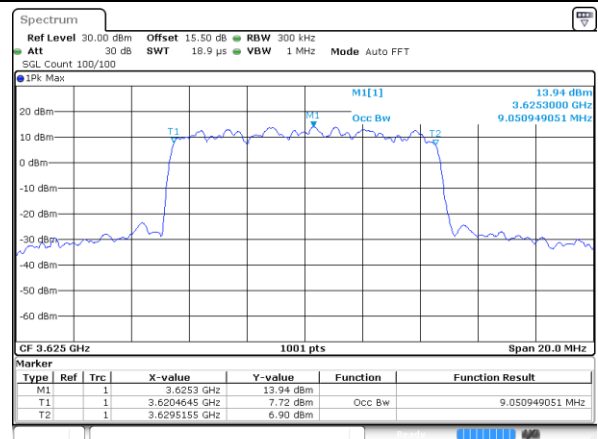




Middle Channel / 15MHz / QPSK

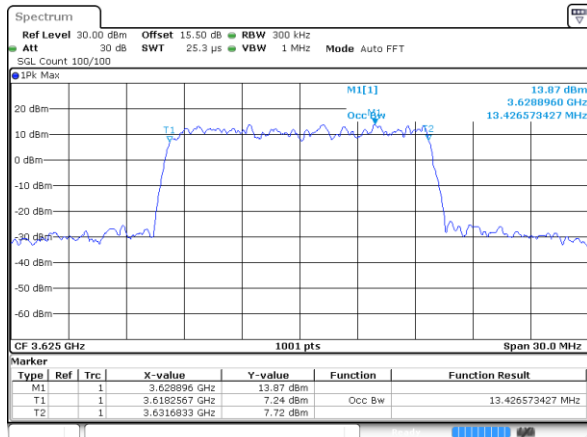

Date: 27 MAR 2024 23:13:16


Middle Channel / 15MHz / 16QAM

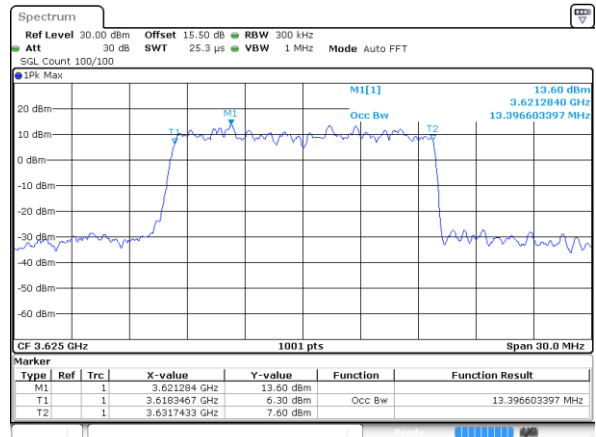

Date: 27 MAR 2024 23:14:10


LTE Band 48

Middle Channel / 20MHz / QPSK

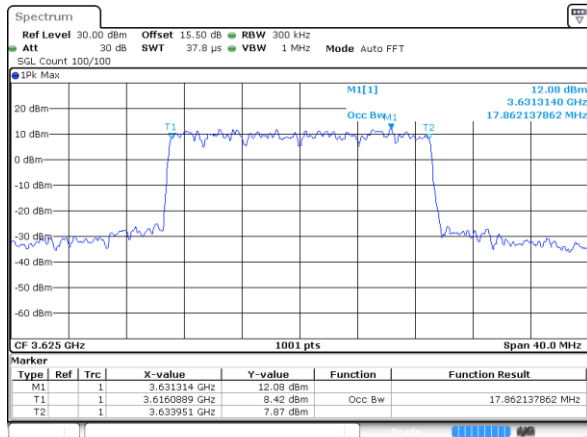

Date: 28 MAR 2024 00:43:23

Middle Channel / 20MHz / 16QAM

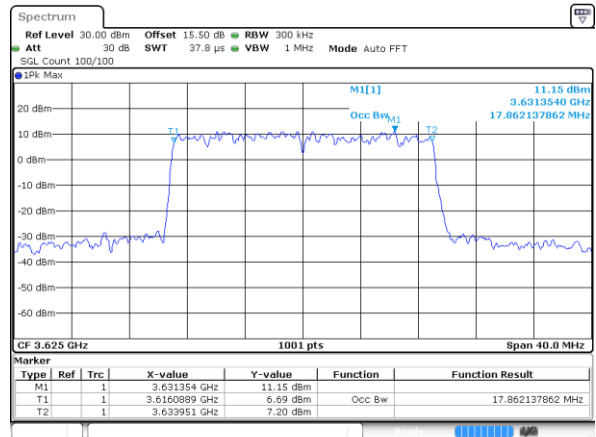

Date: 28 MAR 2024 00:42:28




ACLR

LTE Band 48 / 5MHz


QPSK

Lowest Channel / 1RB0

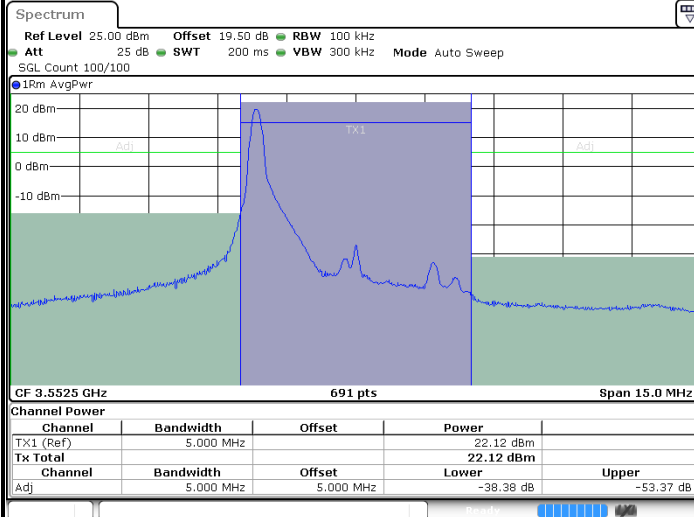


Date: 27 MAR 2024 19:23:02

Lowest Channel / 1RBmax

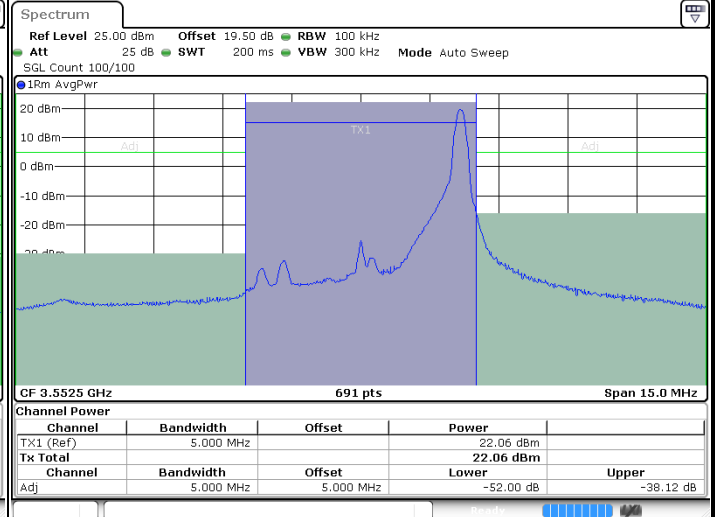

Date: 27 MAR 2024 19:23:48

Lowest Channel / FullIRB

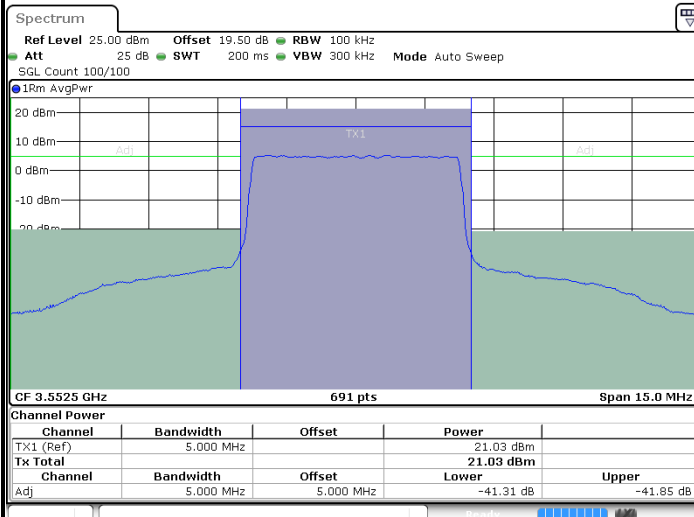

Date: 27 MAR 2024 19:19:08


N/A



LTE Band 48 / 5MHz


QPSK

Middle Channel / 1RB0

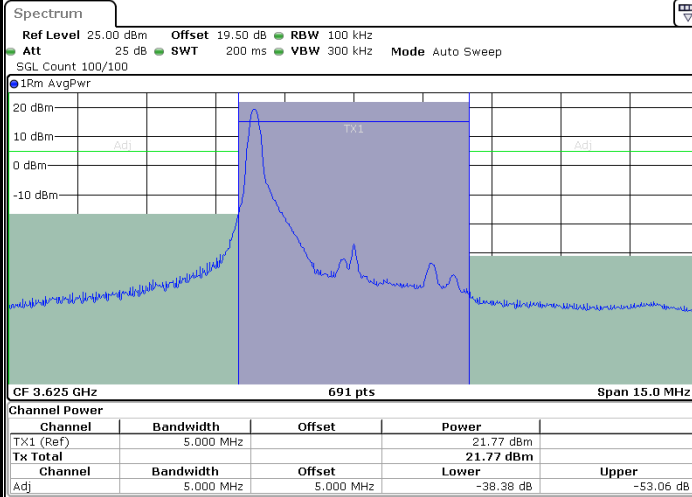


Date: 27 MAR 2024 19:50:42

Middle Channel / 1RBmax

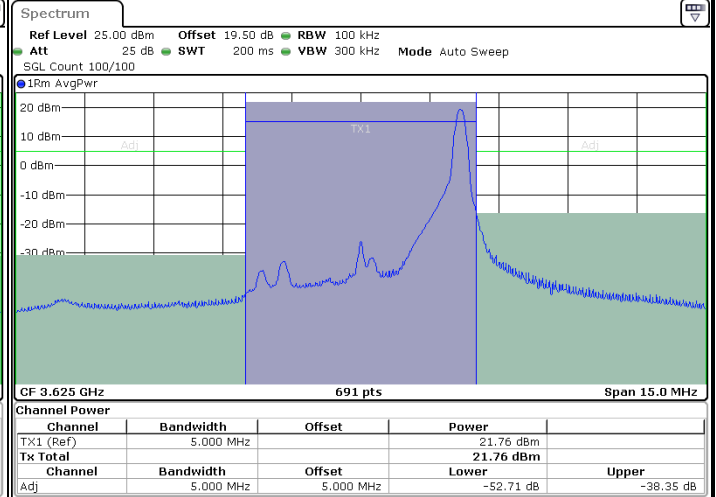

Date: 27 MAR 2024 19:49:56

Middle Channel / FullRB

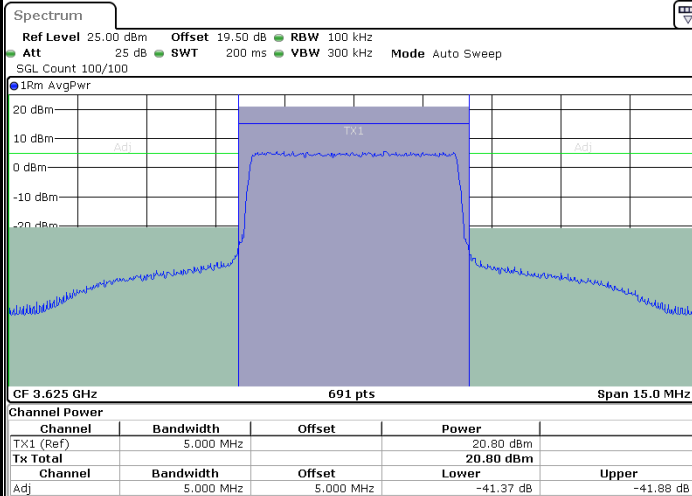

Date: 27 MAR 2024 19:54:32


N/A



LTE Band 48 / 5MHz


QPSK

Highest Channel / 1RB0

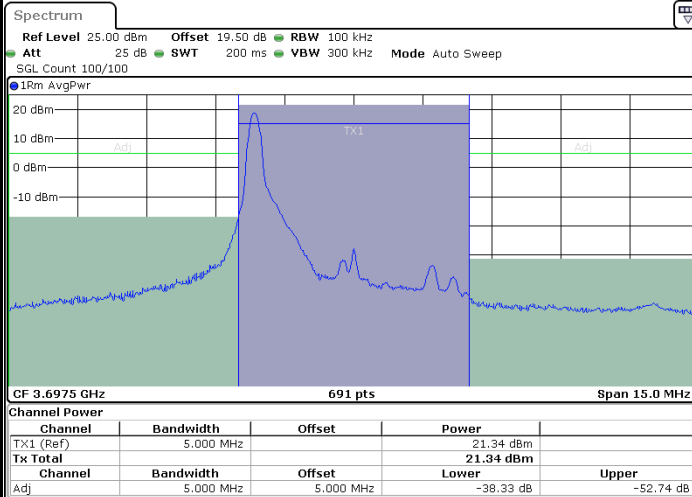


Date: 27 MAR 2024 20:23:28

Highest Channel / 1RBmax

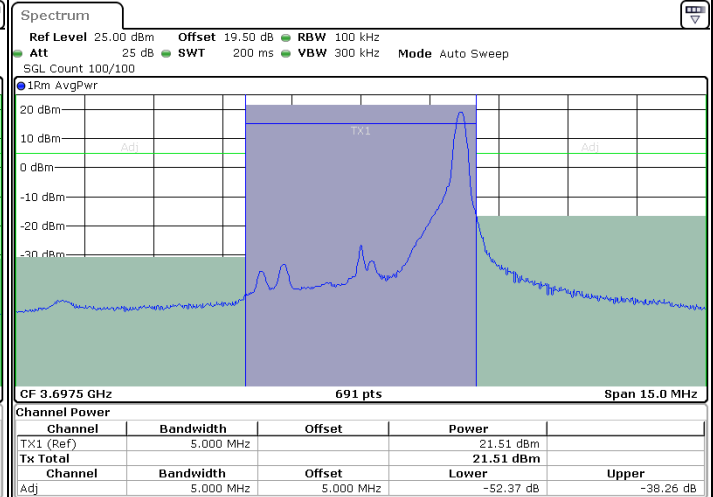

Date: 27 MAR 2024 20:22:40

Highest Channel / FullRB

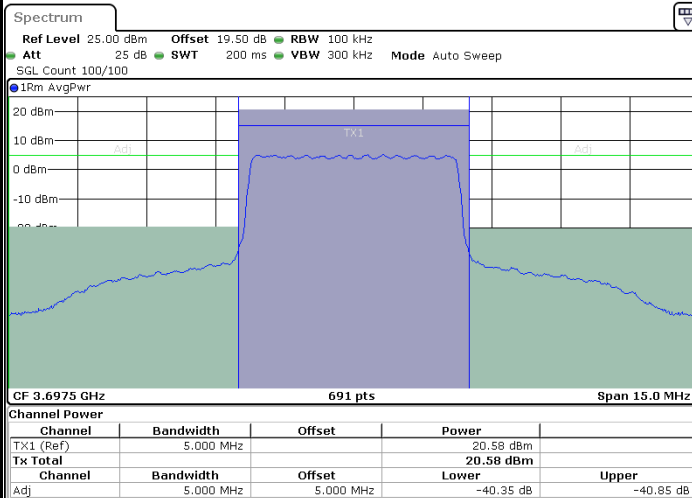

Date: 27 MAR 2024 20:18:42


N/A



LTE Band 48 / 10MHz


QPSK

Lowest Channel / 1RB0

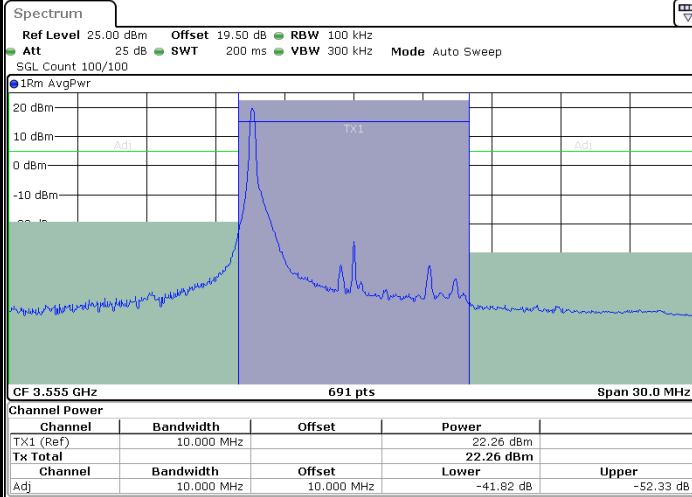


Date: 27 MAR 2024 20:53:33

Lowest Channel / 1RBmax

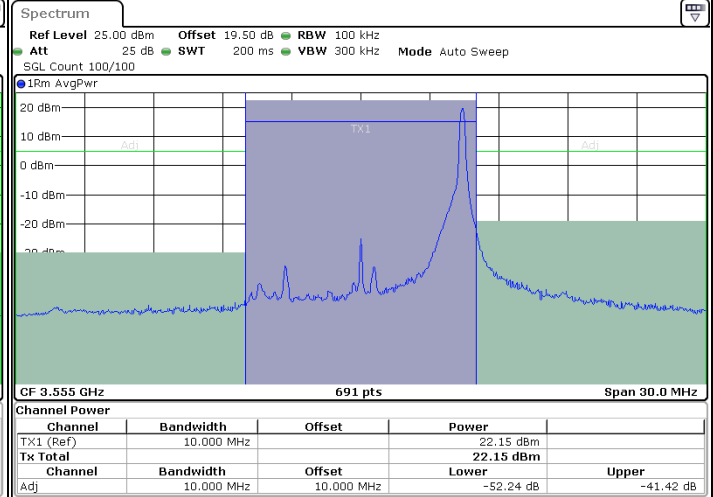

Date: 27 MAR 2024 20:52:46

Lowest Channel / FullIRB

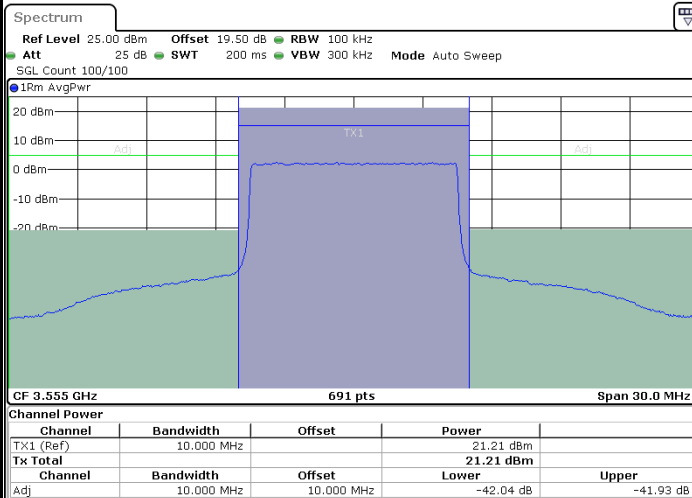

Date: 27 MAR 2024 20:48:51


N/A



LTE Band 48 / 10MHz


QPSK

Middle Channel / 1RB0

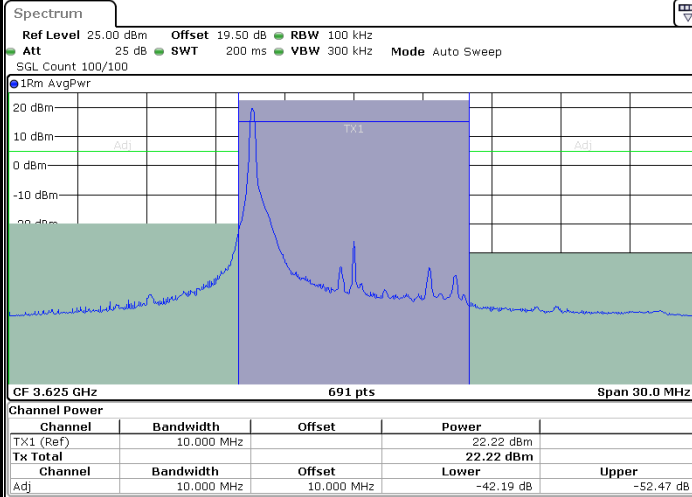


Date: 27 MAR 2024 21:19:30

Middle Channel / 1RBmax

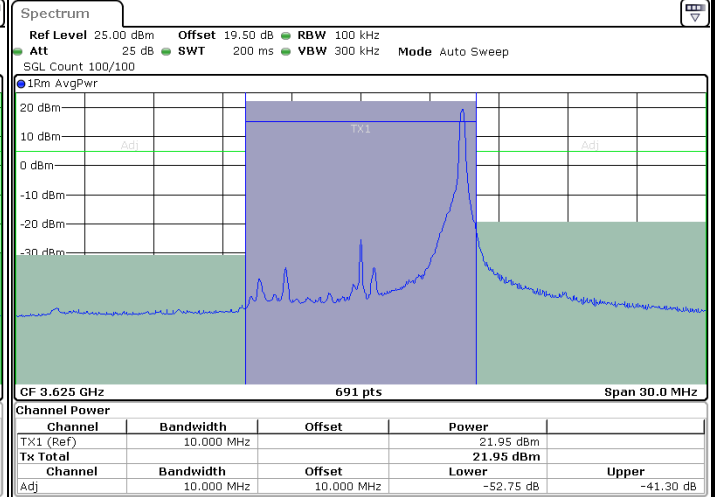

Date: 27 MAR 2024 21:20:16

Middle Channel / FullRB

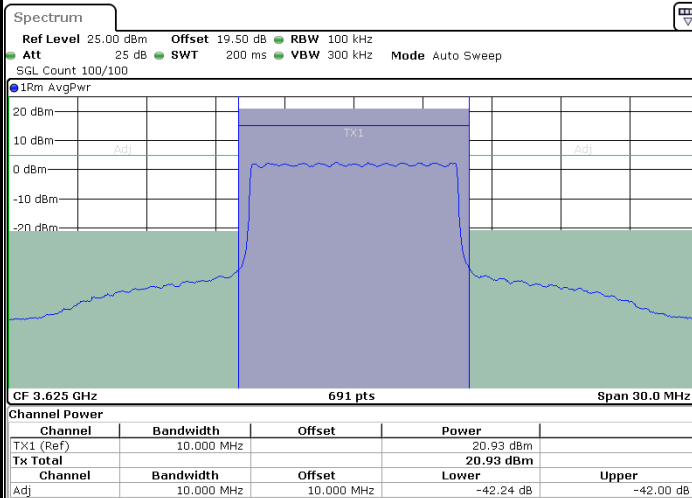

Date: 27 MAR 2024 21:24:09


N/A



LTE Band 48 / 10MHz


QPSK

Highest Channel / 1RB0

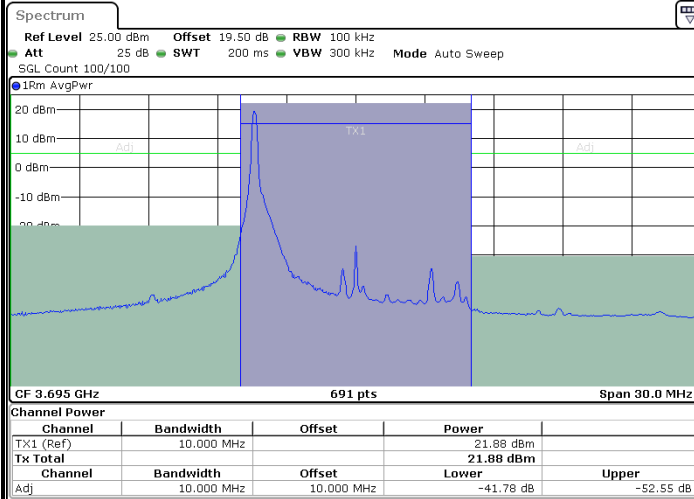


Date: 27 MAR 2024 21:53:06

Highest Channel / 1RBmax

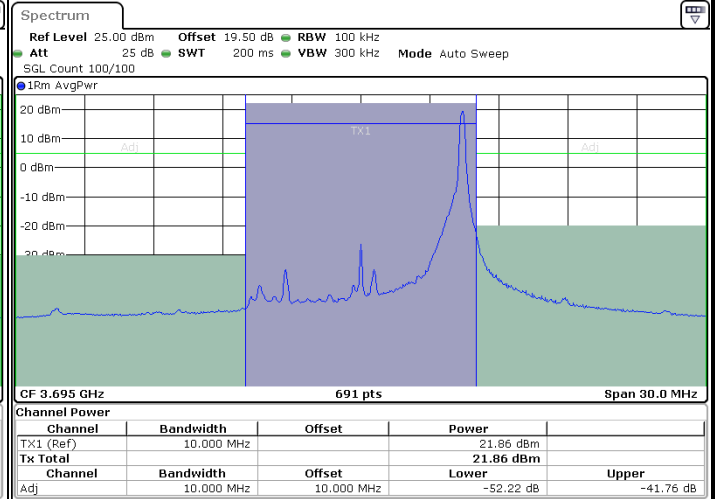

Date: 27 MAR 2024 21:52:18

Highest Channel / FullRB

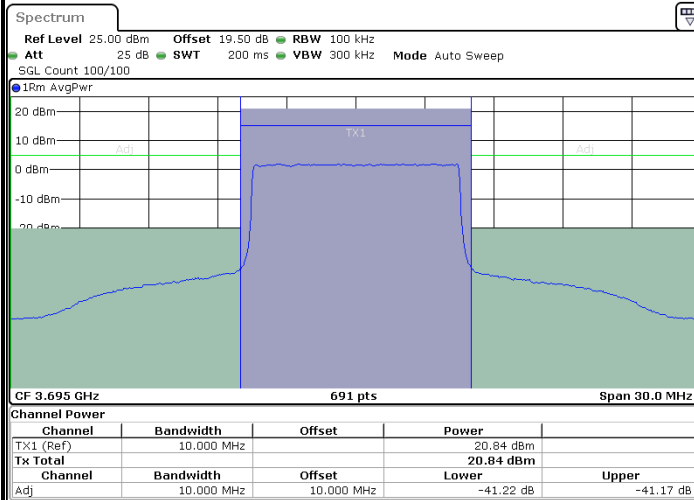

Date: 27 MAR 2024 21:48:20


N/A



LTE Band 48 / 15MHz


QPSK

Lowest Channel / 1RB0

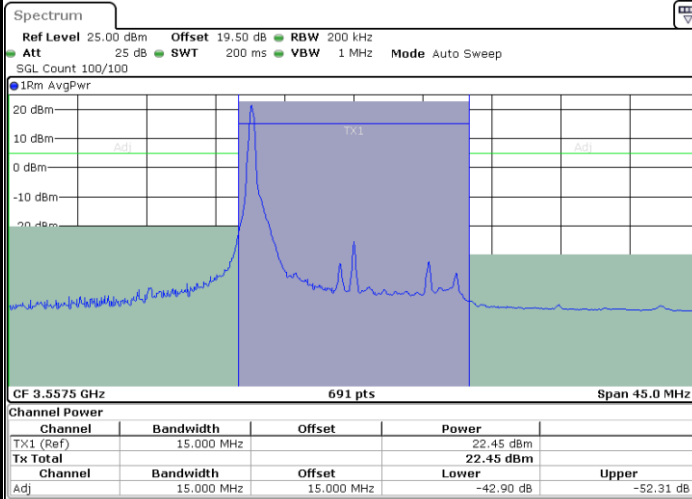


Date: 27 MAR 2024 22:23:32

Lowest Channel / 1RBmax

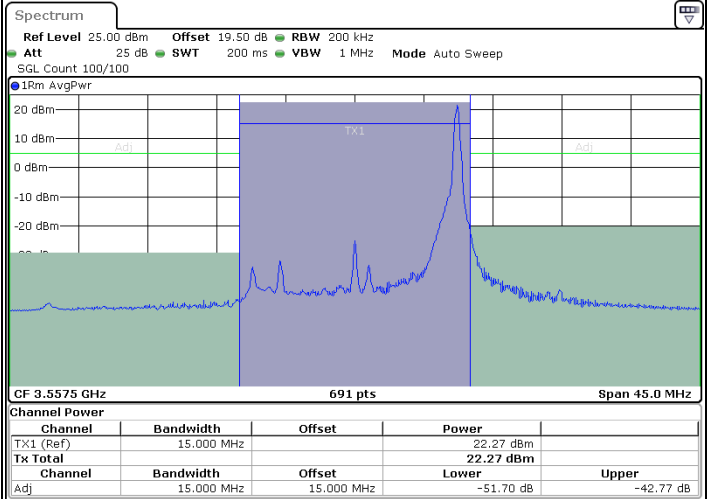

Date: 27 MAR 2024 22:22:45

Lowest Channel / FullIRB

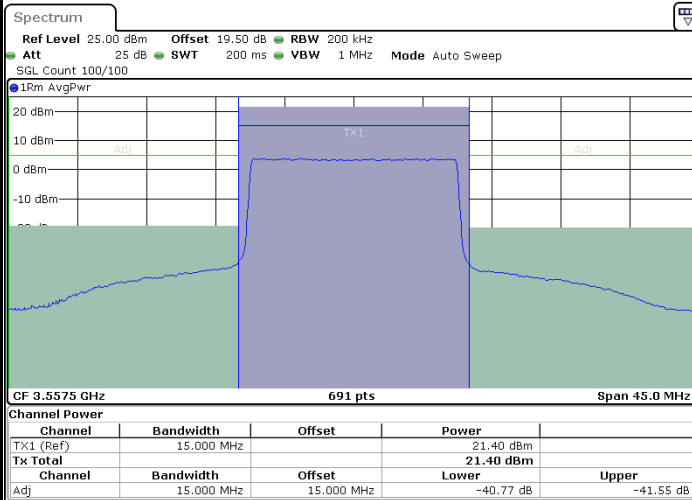

Date: 27 MAR 2024 22:18:50


N/A



LTE Band 48 / 15MHz


QPSK

Middle Channel / 1RB0

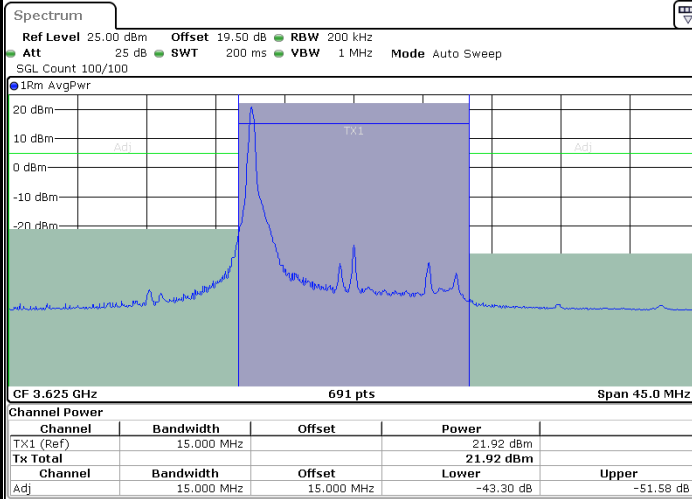


Date: 27 MAR 2024 22:49:30

Middle Channel / 1RBmax

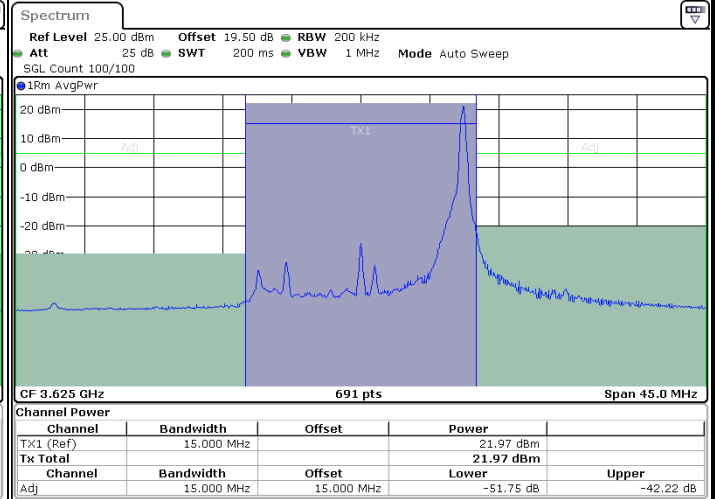

Date: 27 MAR 2024 22:50:16

Middle Channel / FullRB

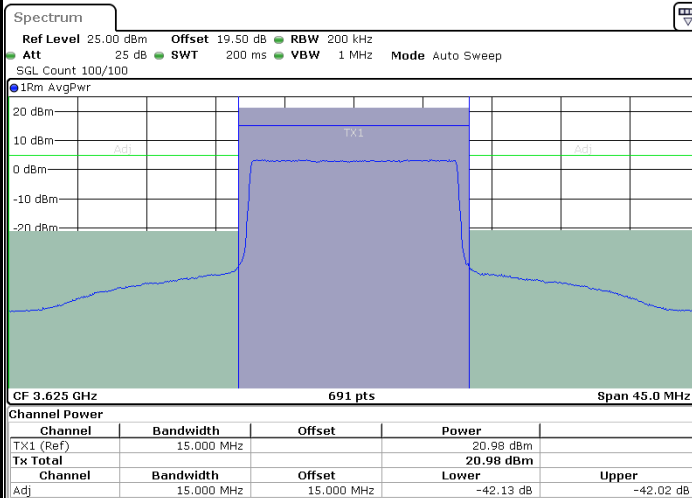

Date: 27 MAR 2024 22:54:08


N/A



LTE Band 48 / 15MHz


QPSK

Highest Channel / 1RB0

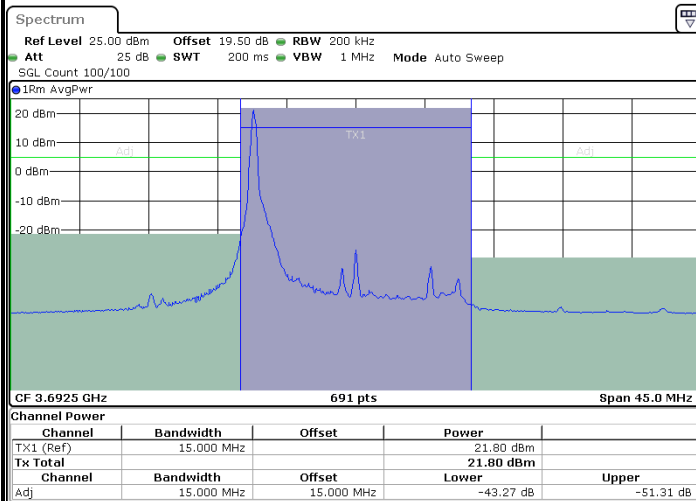


Date: 27 MAR 2024 23:23:02

Highest Channel / 1RBmax

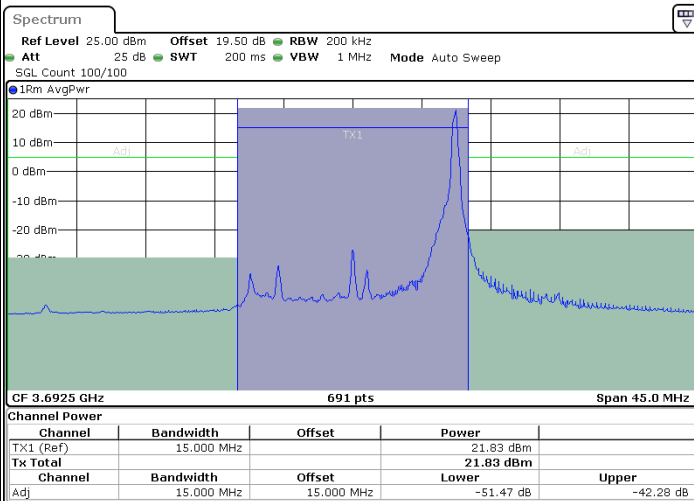

Date: 27 MAR 2024 23:22:14

Highest Channel / FullRB

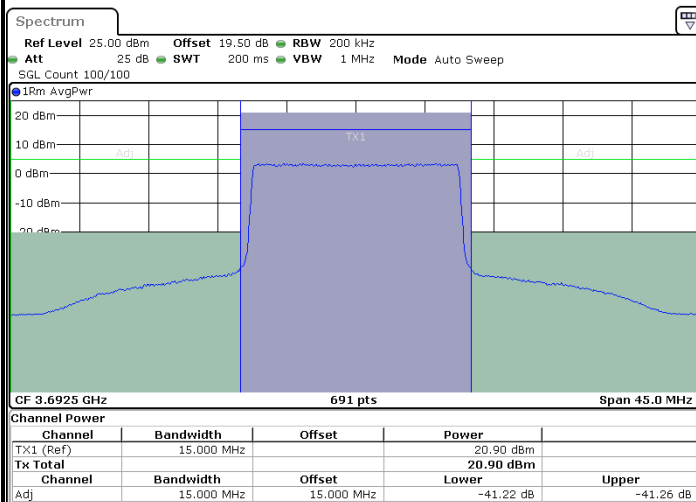

Date: 27 MAR 2024 23:18:15


N/A



LTE Band 48 / 20MHz


QPSK

Lowest Channel / 1RB0

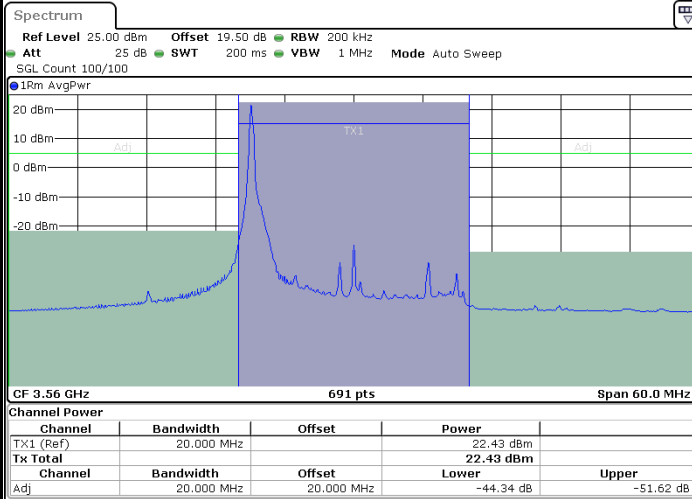


Date: 27 MAR 2024 23:54:21

Lowest Channel / 1RBmax

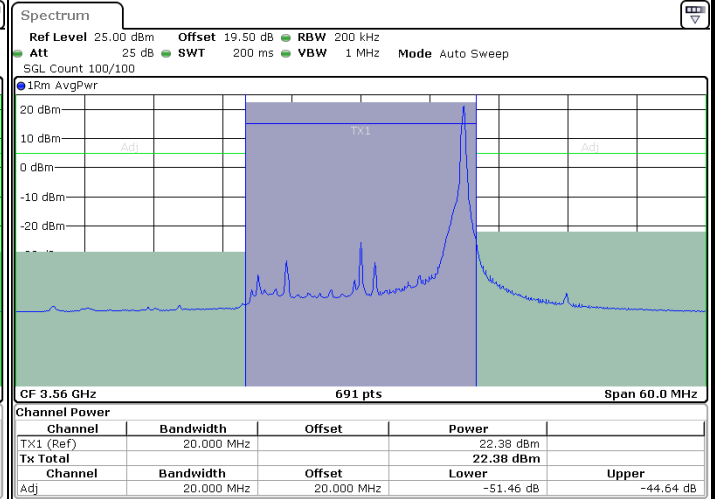

Date: 27 MAR 2024 23:50:30

Lowest Channel / FullIRB

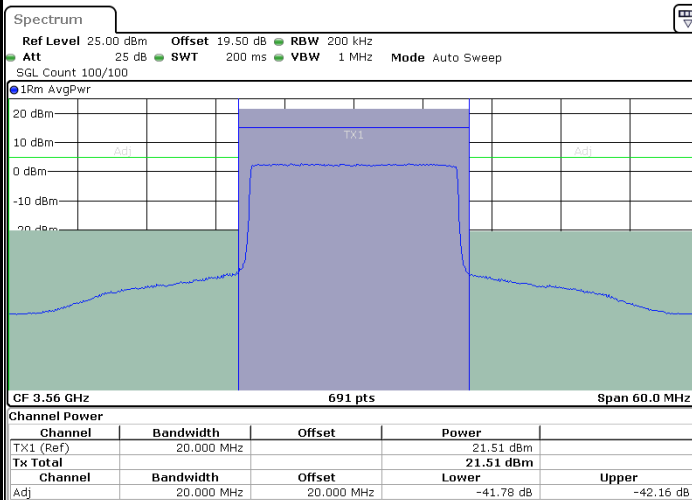

Date: 27 MAR 2024 23:48:11


N/A



LTE Band 48 / 20MHz


QPSK

Middle Channel / 1RB0

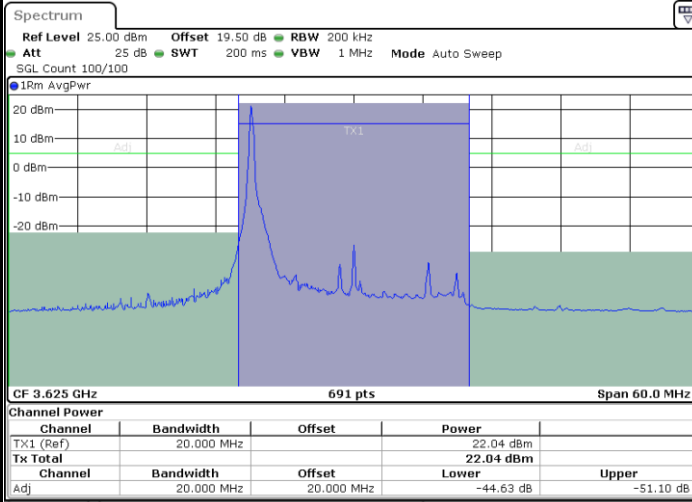


Date: 28 MAR 2024 00:17:15

Middle Channel / 1RBmax

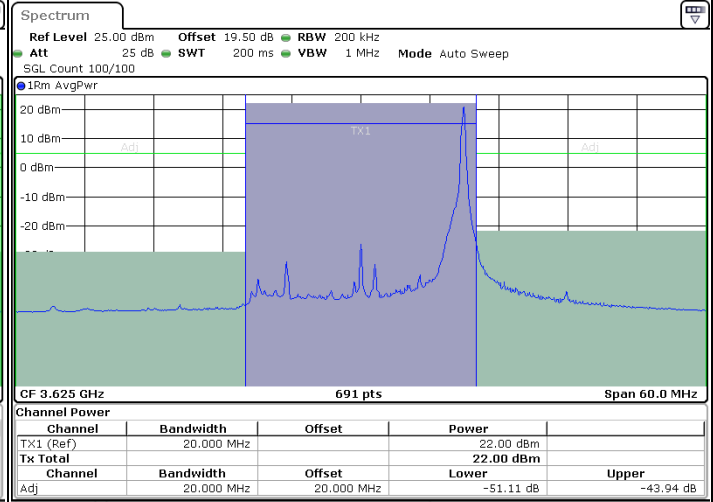

Date: 28 MAR 2024 00:21:03

Middle Channel / FullRB

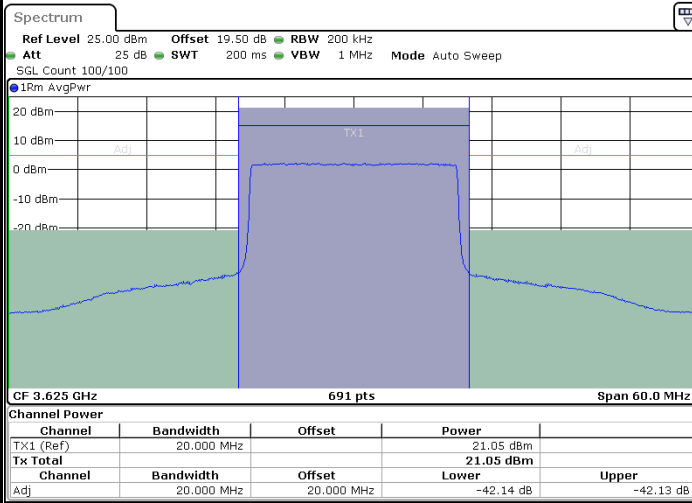

Date: 28 MAR 2024 00:21:49


N/A



LTE Band 48 / 20MHz


QPSK

Highest Channel / 1RB0

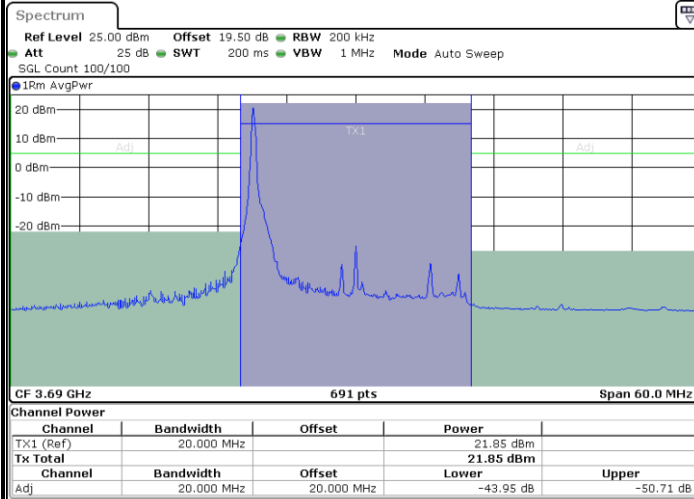


Date: 28 MAR 2024 00:54:59

Highest Channel / 1RBmax

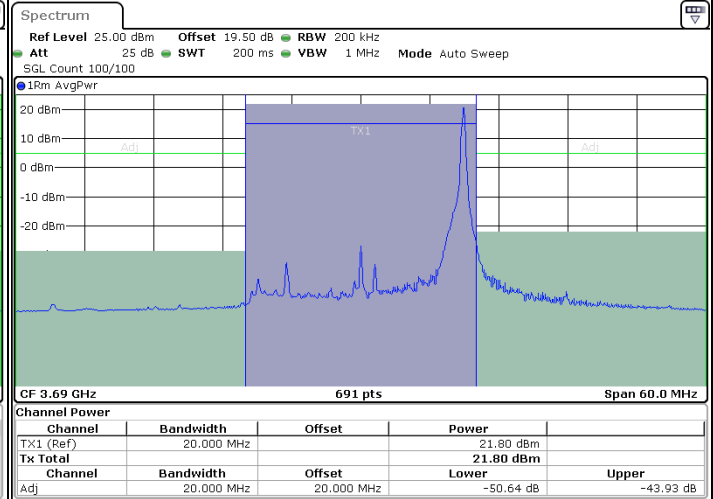

Date: 28 MAR 2024 00:51:09

Highest Channel / FullRB

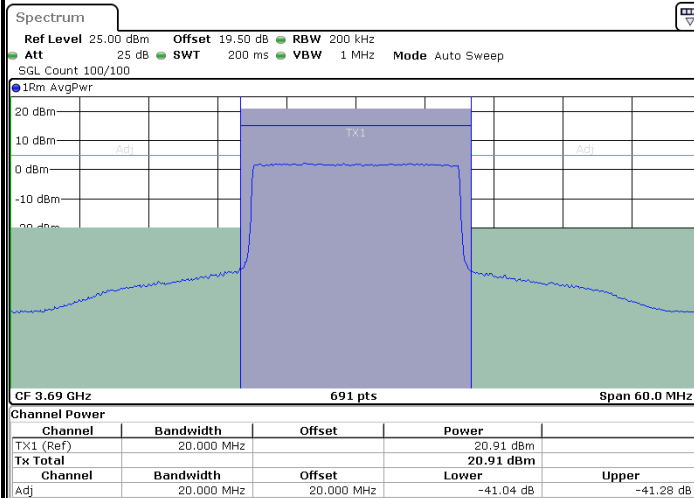

Date: 28 MAR 2024 00:50:22


N/A



LTE Band 48 / 5MHz


16QAM

Lowest Channel / 1RB0

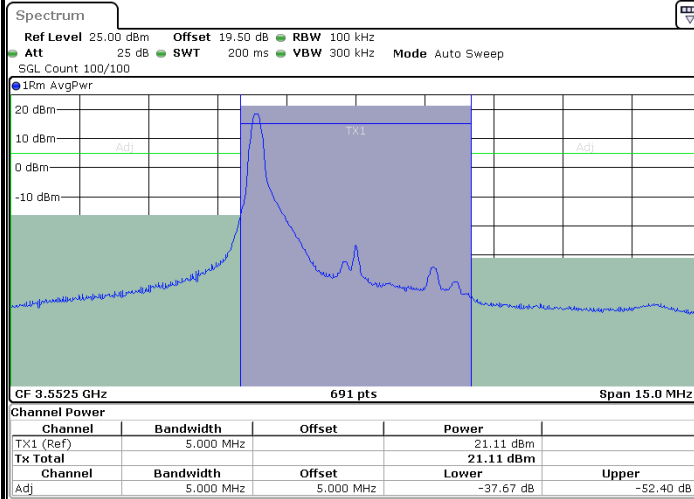


Date: 27 MAR 2024 19:22:15

Lowest Channel / 1RBmax

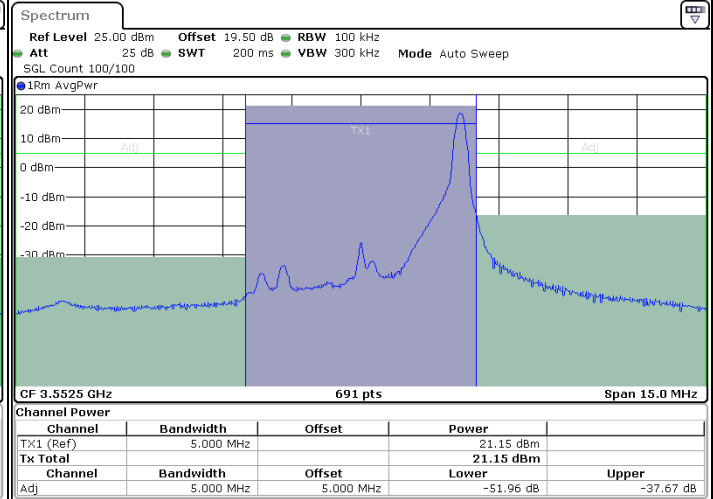

Date: 27 MAR 2024 19:24:35

Lowest Channel / FullIRB

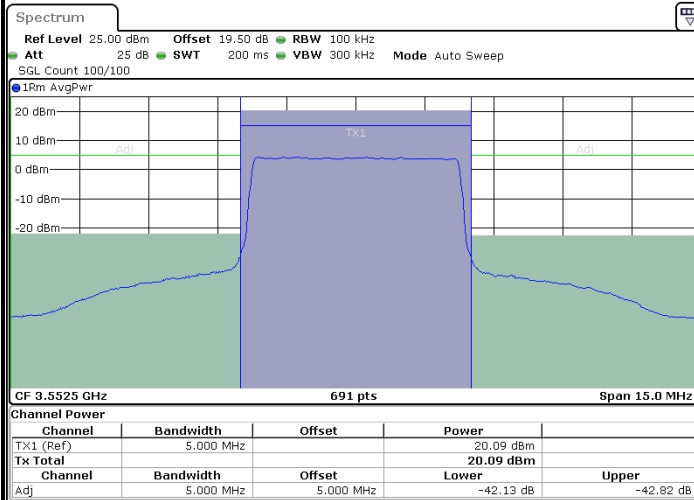

Date: 27 MAR 2024 19:19:55


N/A



LTE Band 48 / 5MHz


16QAM

Middle Channel / 1RB0

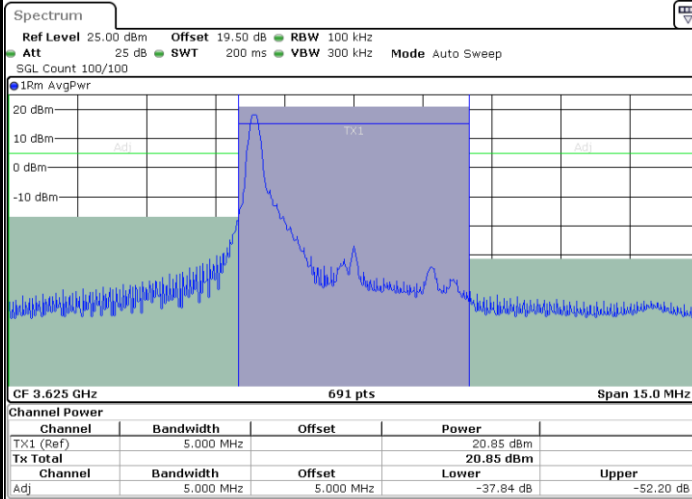


Date: 27 MAR 2024 19:51:28

Middle Channel / 1RBmax

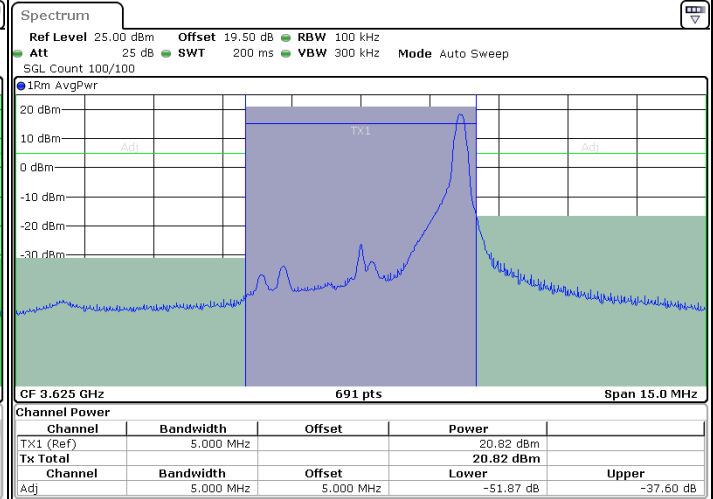

Date: 27 MAR 2024 19:49:10

Middle Channel / FullRB

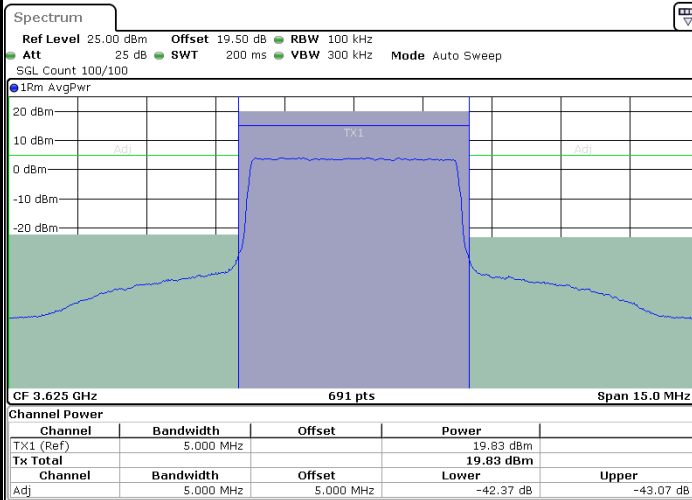

Date: 27 MAR 2024 19:53:46


N/A



LTE Band 48 / 5MHz


16QAM

Highest Channel / 1RB0

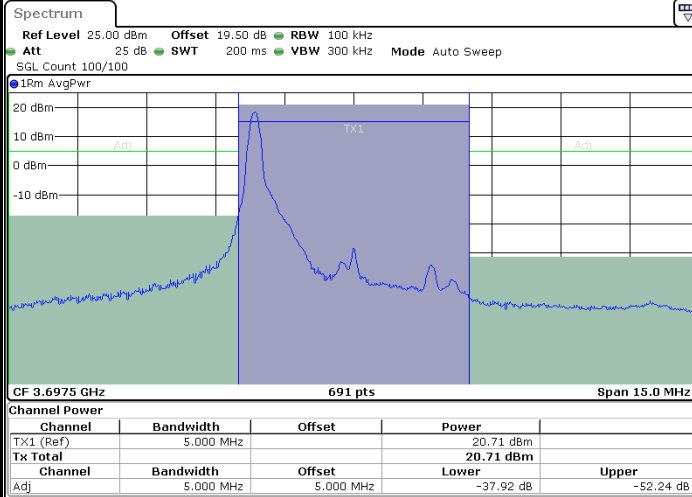


Date: 27 MAR 2024 20:24:15

Highest Channel / 1RBmax

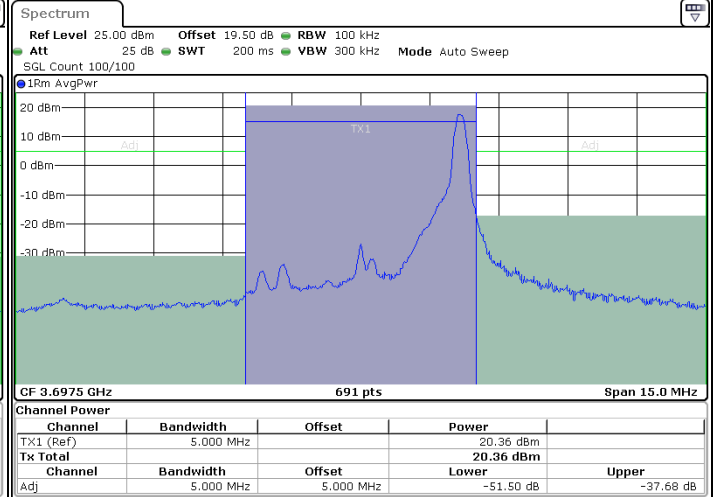

Date: 27 MAR 2024 20:21:52

Highest Channel / FullRB

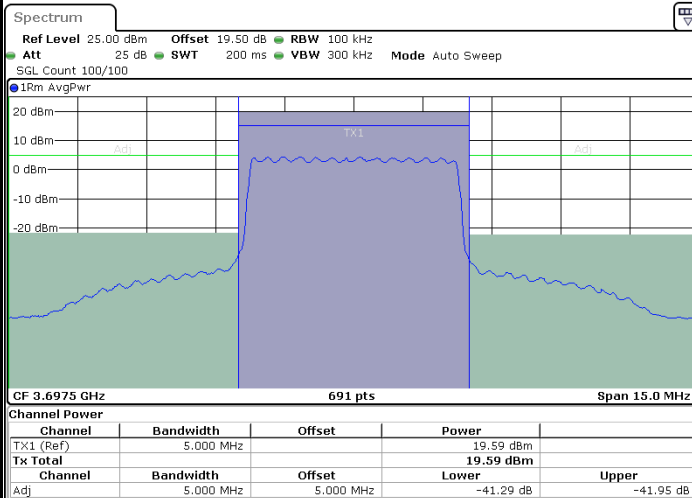

Date: 27 MAR 2024 20:19:30


N/A



LTE Band 48 / 10MHz


16QAM

Lowest Channel / 1RB0

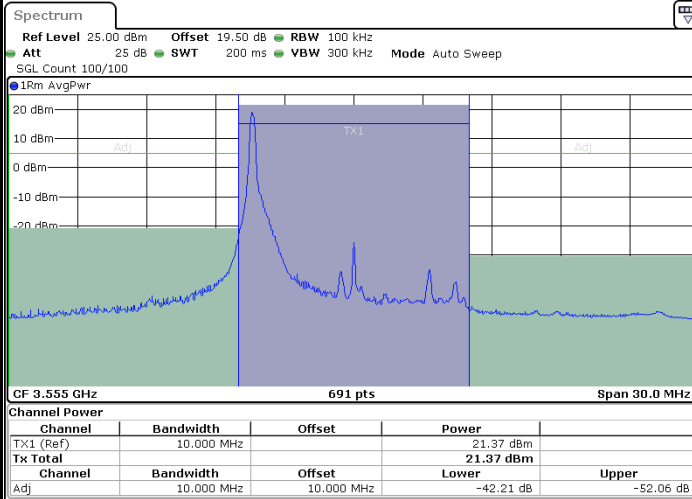


Date: 27 MAR 2024 20:54:20

Lowest Channel / 1RBmax

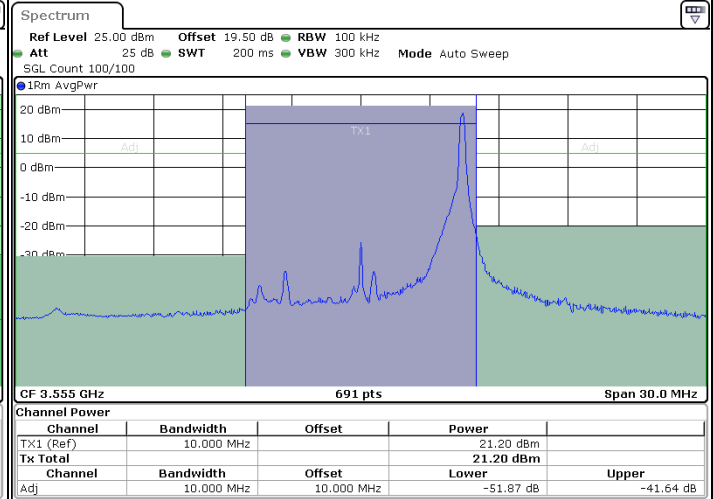

Date: 27 MAR 2024 20:51:59

Lowest Channel / FullIRB

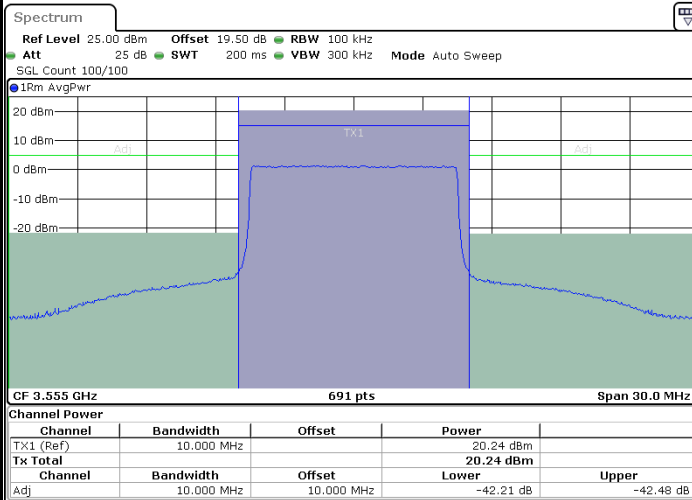

Date: 27 MAR 2024 20:49:38


N/A



LTE Band 48 / 10MHz


16QAM

Middle Channel / 1RB0

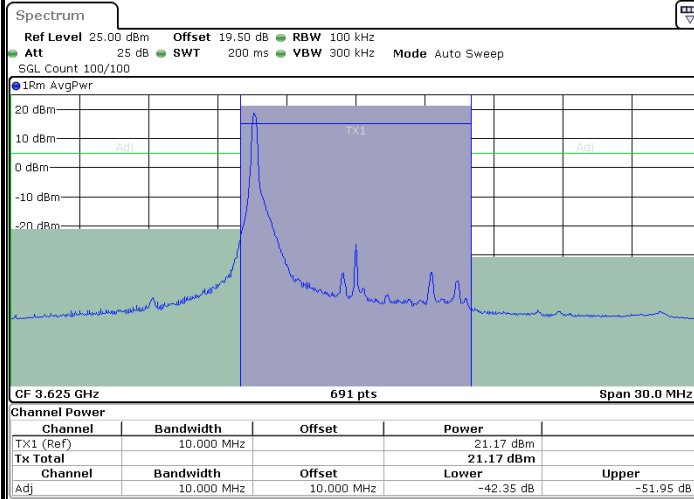


Date: 27 MAR 2024 21:18:43

Middle Channel / 1RBmax

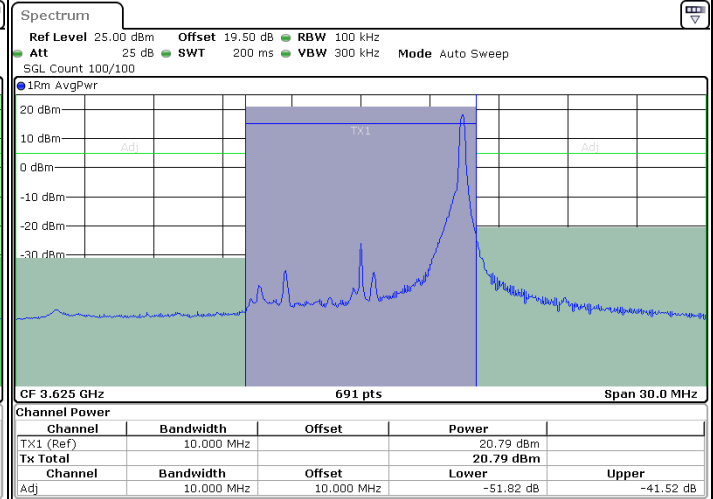

Date: 27 MAR 2024 21:21:03

Middle Channel / FullIRB

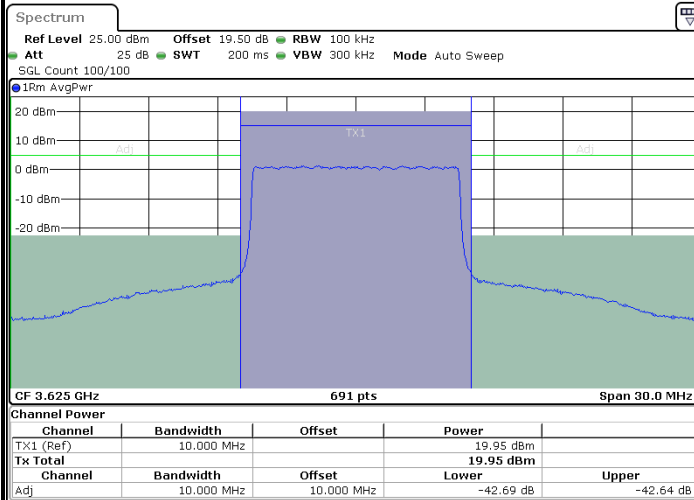

Date: 27 MAR 2024 21:23:22


N/A



LTE Band 48 / 10MHz


16QAM

Highest Channel / 1RB0

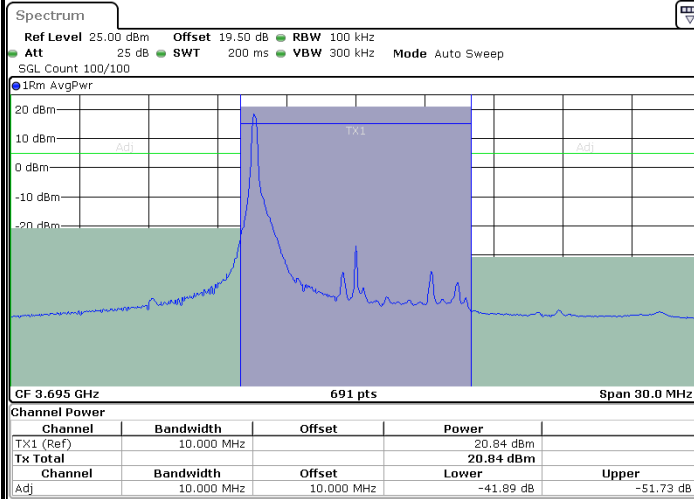


Date: 27 MAR 2024 21:53:54

Highest Channel / 1RBmax

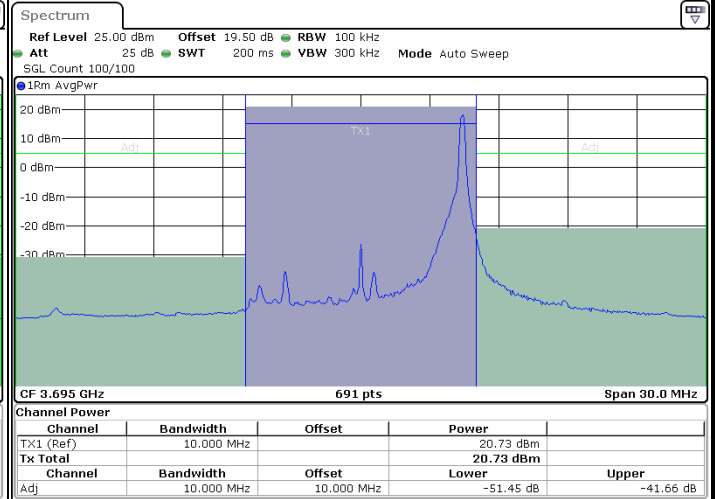

Date: 27 MAR 2024 21:51:31

Highest Channel / FullRB

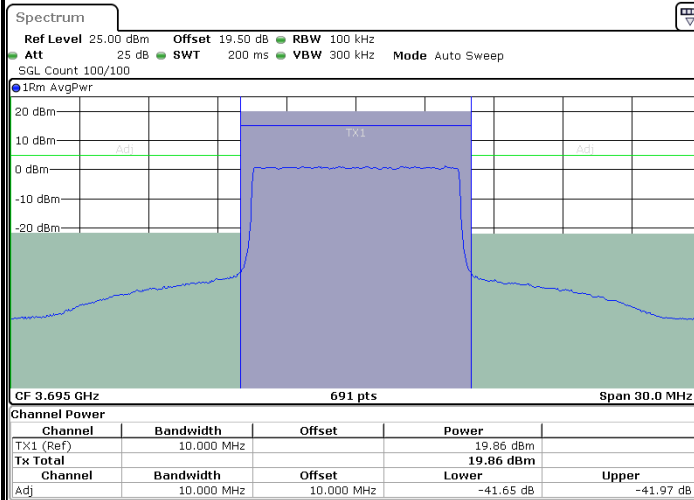

Date: 27 MAR 2024 21:49:07


N/A



LTE Band 48 / 15MHz


16QAM

Lowest Channel / 1RB0

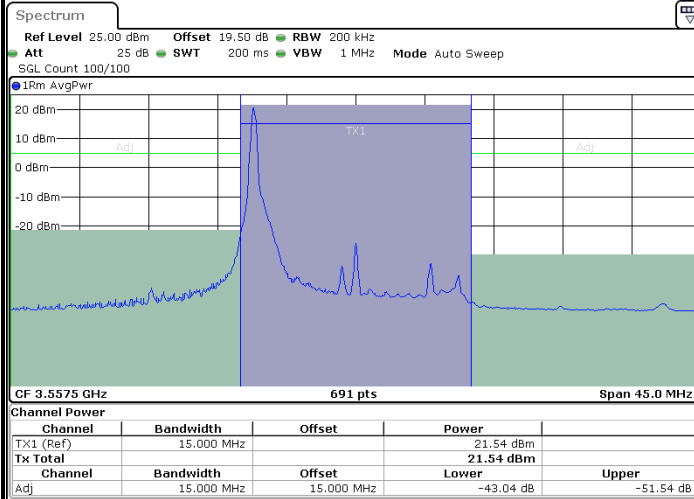


Date: 27 MAR 2024 22:24:20

Lowest Channel / 1RBmax

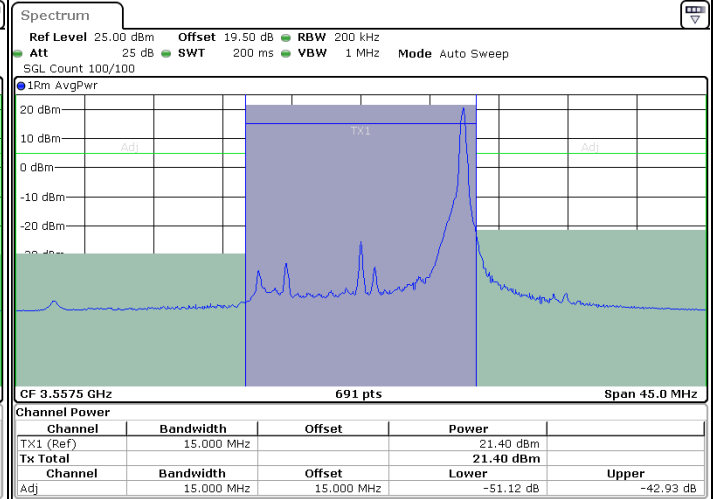

Date: 27 MAR 2024 22:21:58

Lowest Channel / FullIRB

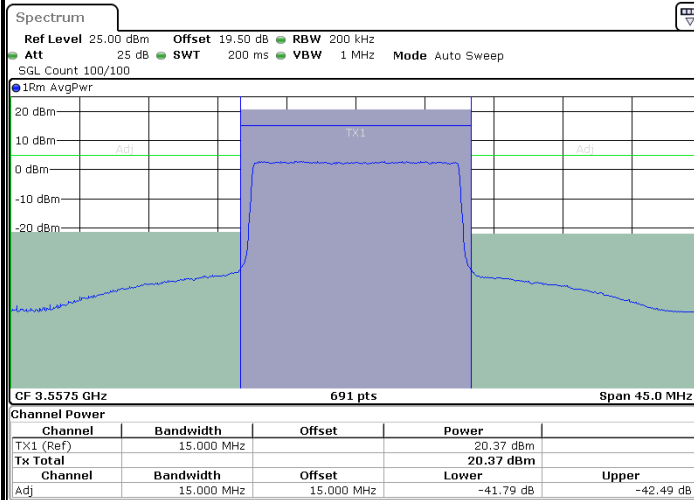

Date: 27 MAR 2024 22:19:37


N/A



LTE Band 48 / 15MHz


16QAM

Middle Channel / 1RB0

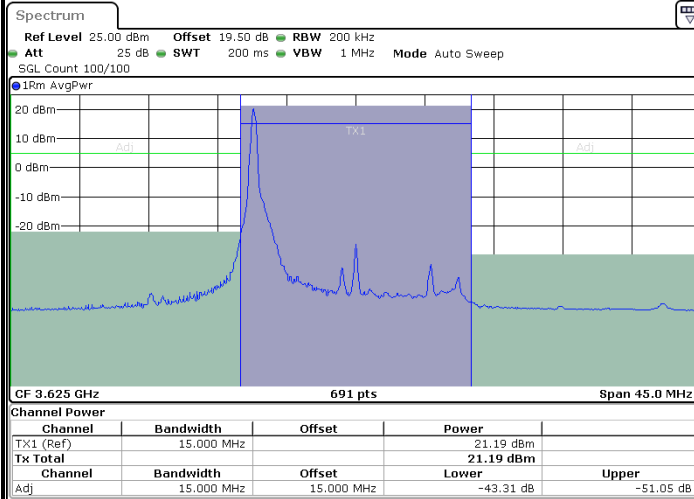


Date: 27 MAR 2024 22:48:43

Middle Channel / 1RBmax

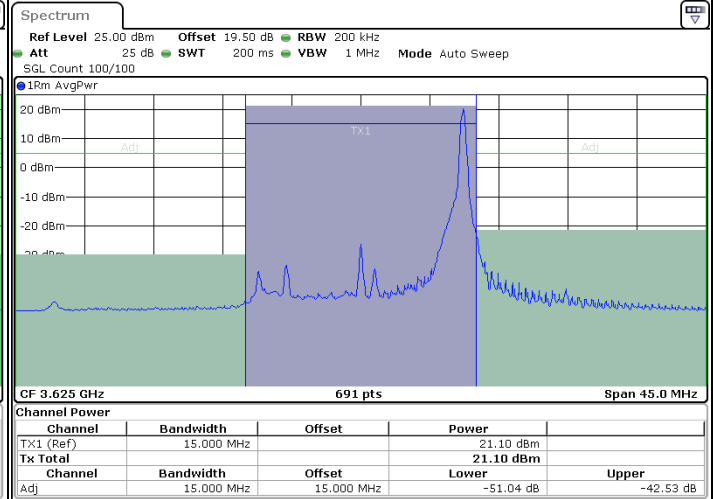

Date: 27 MAR 2024 22:51:03

Middle Channel / FullIRB

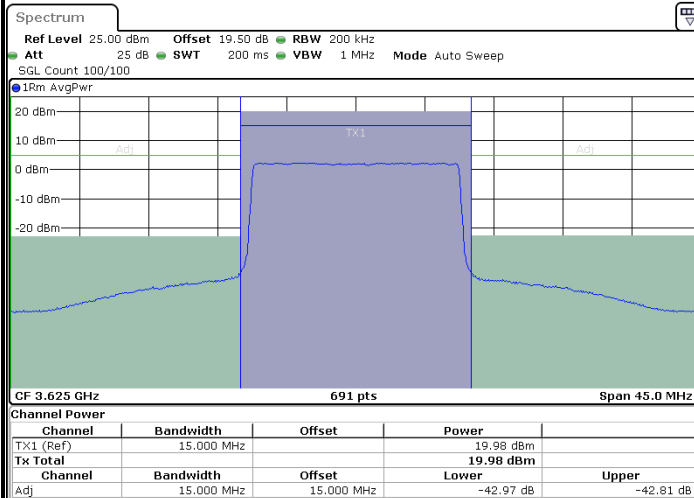

Date: 27 MAR 2024 22:53:22


N/A



LTE Band 48 / 15MHz


16QAM

Highest Channel / 1RB0

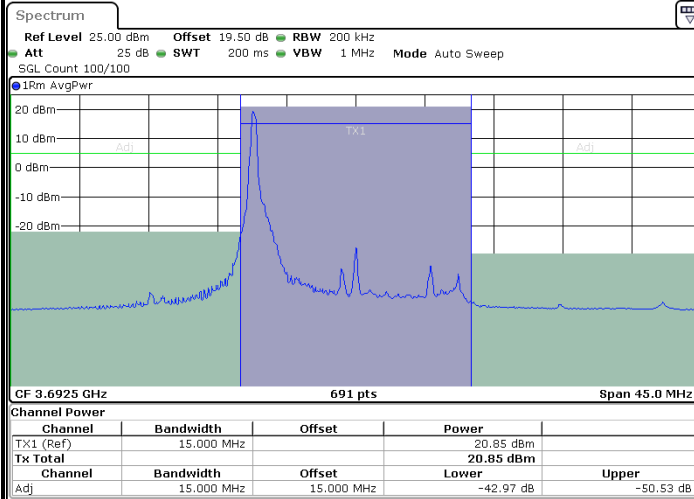


Date: 27 MAR 2024 23:23:49

Highest Channel / 1RBmax

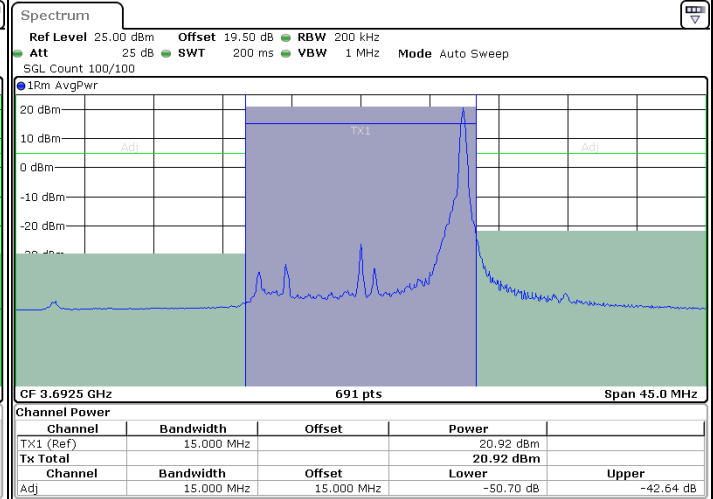

Date: 27 MAR 2024 23:21:26

Highest Channel / FullRB

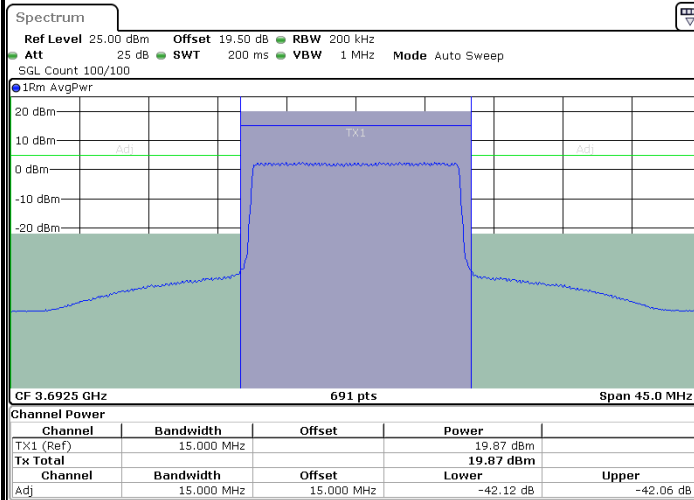

Date: 27 MAR 2024 23:19:03


N/A



LTE Band 48 / 20MHz


16QAM

Lowest Channel / 1RB0

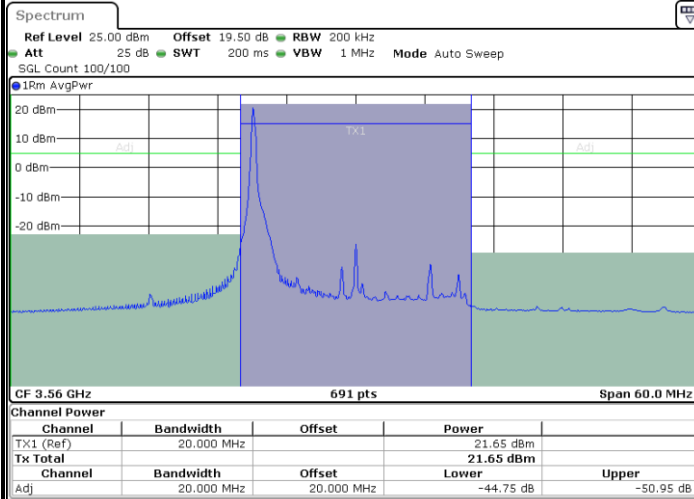


Date: 27 MAR 2024 23:53:35

Lowest Channel / 1RBmax

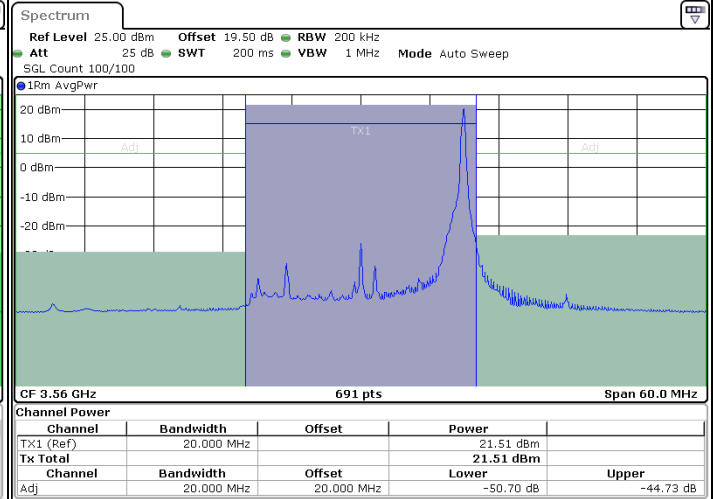

Date: 27 MAR 2024 23:51:16

Lowest Channel / FullIRB

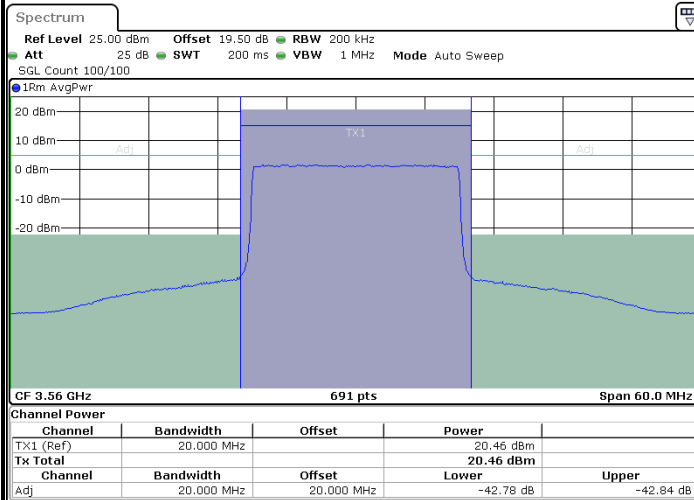

Date: 27 MAR 2024 23:48:58


N/A



LTE Band 48 / 20MHz


16QAM

Middle Channel / 1RB0

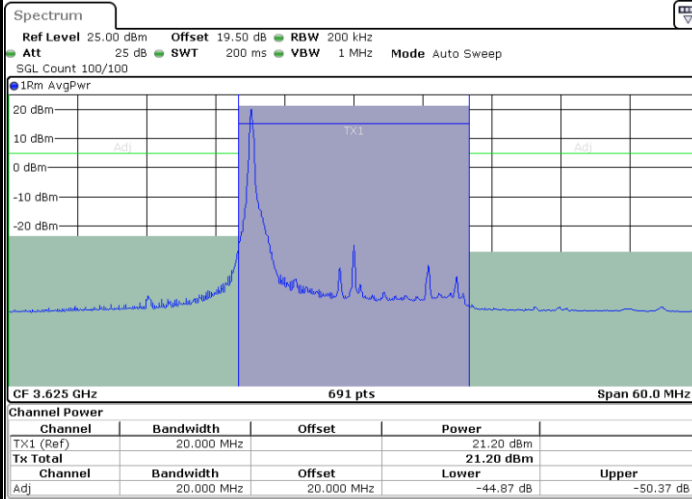


Date: 28 MAR 2024 00:18:00

Middle Channel / 1RBmax

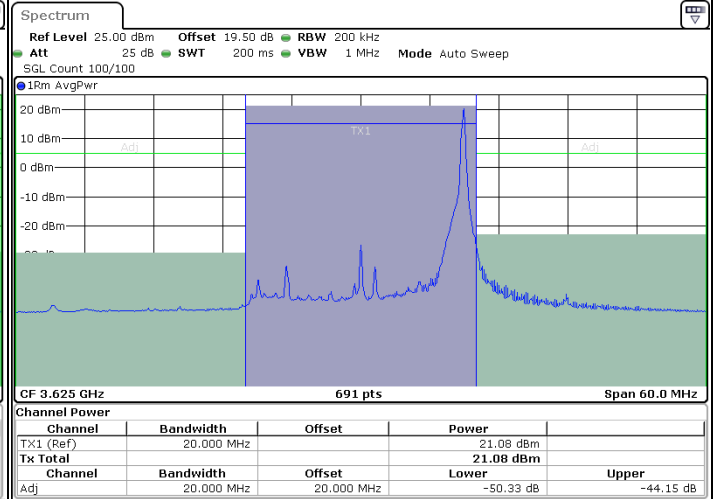

Date: 28 MAR 2024 00:20:17

Middle Channel / FullIRB

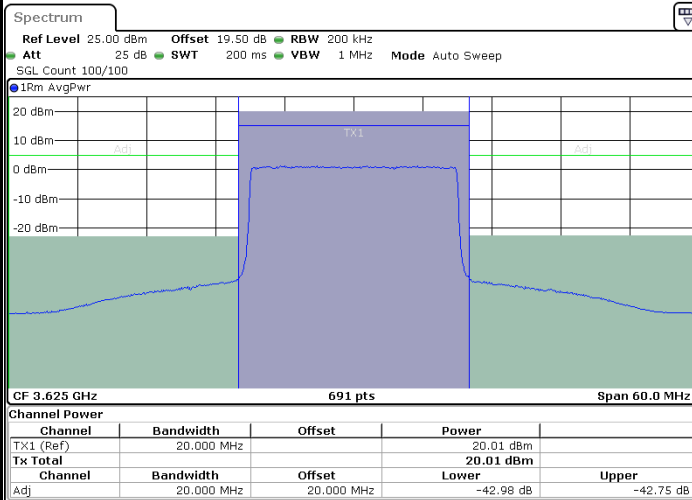

Date: 28 MAR 2024 00:22:34


N/A



LTE Band 48 / 20MHz


16QAM

Highest Channel / 1RB0

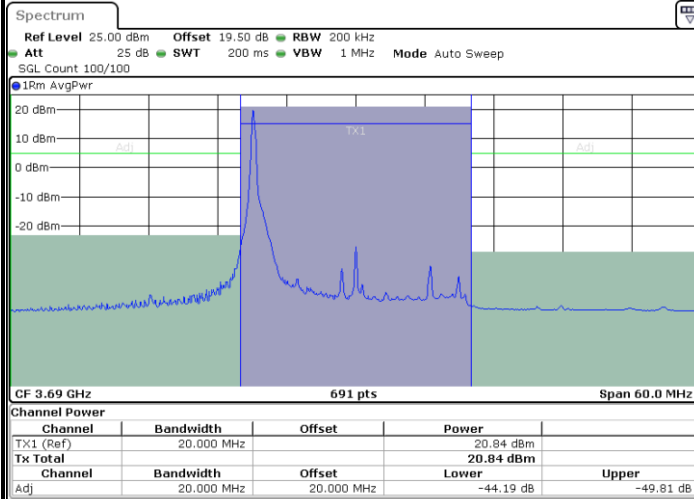


Date: 28 MAR 2024 00:54:13

Highest Channel / 1RBmax

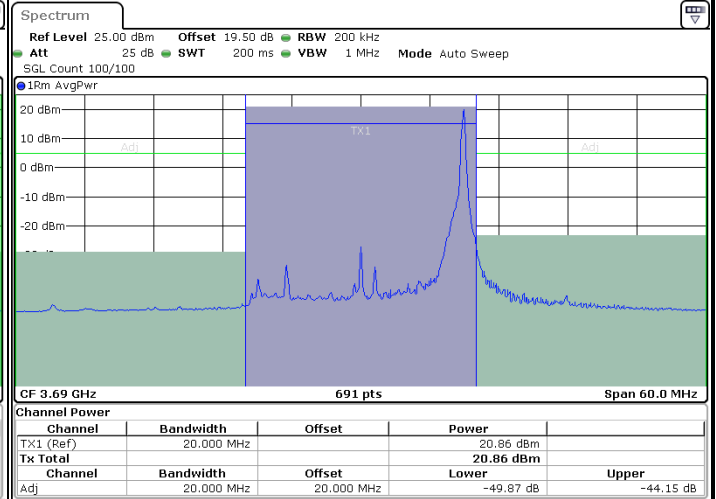

Date: 28 MAR 2024 00:51:55

Highest Channel / FullRB

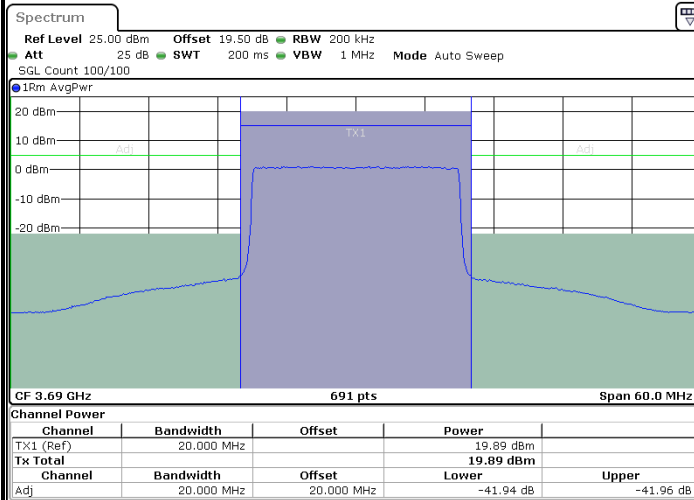

Date: 28 MAR 2024 00:49:36


N/A



LTE Band 48 / 5MHz


64QAM

Lowest Channel / 1RB0

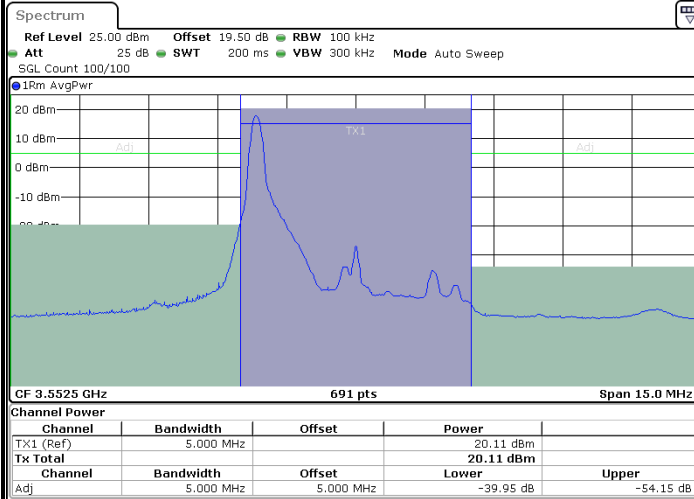


Date: 27 MAR 2024 19:21:28

Lowest Channel / 1RBmax

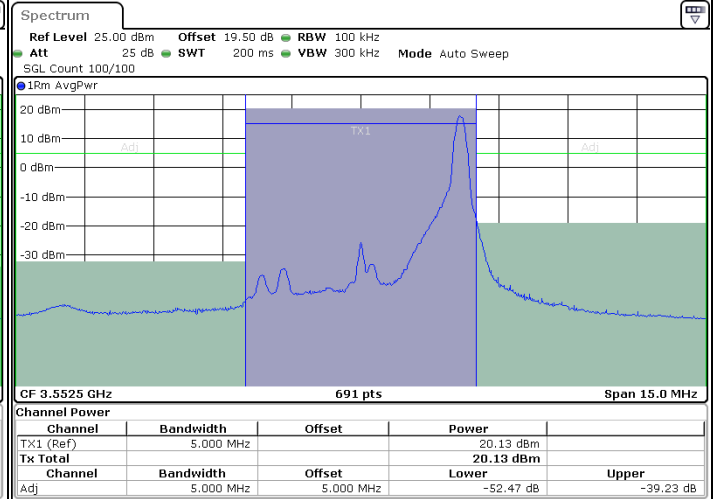

Date: 27 MAR 2024 19:25:22

Lowest Channel / FullIRB

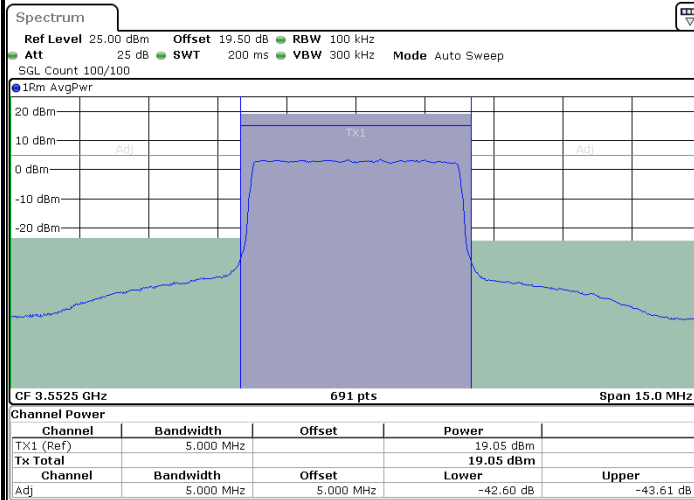

Date: 27 MAR 2024 19:20:42


N/A



LTE Band 48 / 5MHz


64QAM

Middle Channel / 1RB0

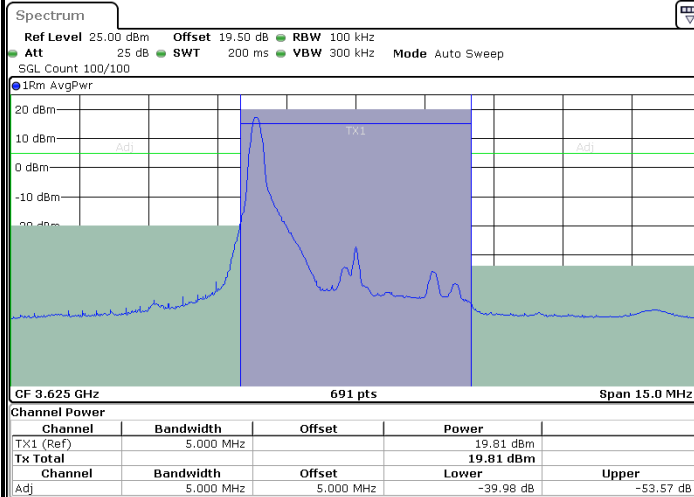


Date: 27 MAR 2024 19:52:14

Middle Channel / 1RBmax

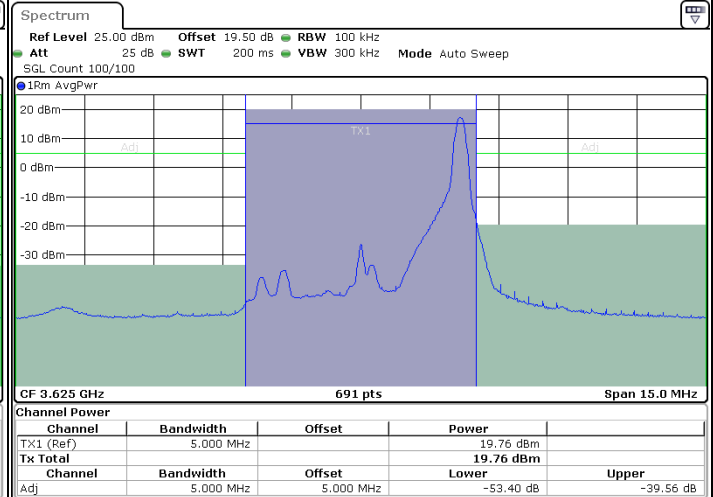

Date: 27 MAR 2024 19:48:24

Middle Channel / FullRB

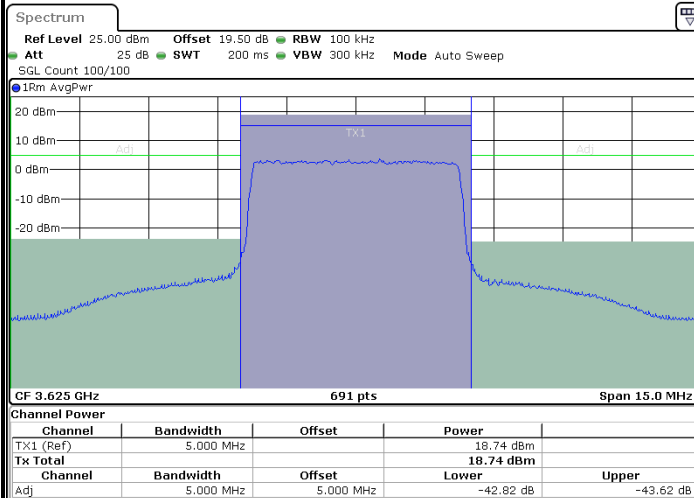

Date: 27 MAR 2024 19:53:00


N/A



LTE Band 48 / 5MHz


64QAM

Highest Channel / 1RB0

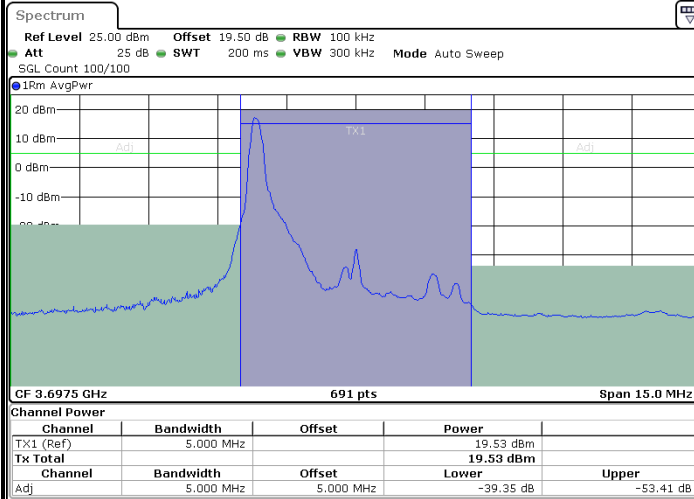


Date: 27 MAR 2024 20:25:03

Highest Channel / 1RBmax

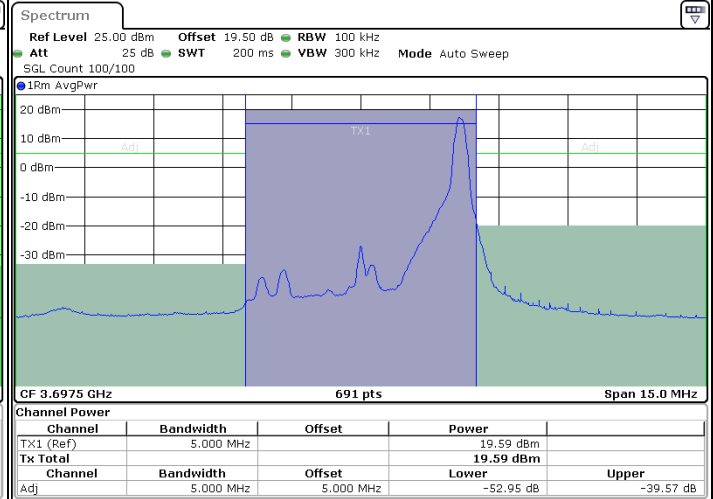

Date: 27 MAR 2024 20:21:05

Highest Channel / FullRB

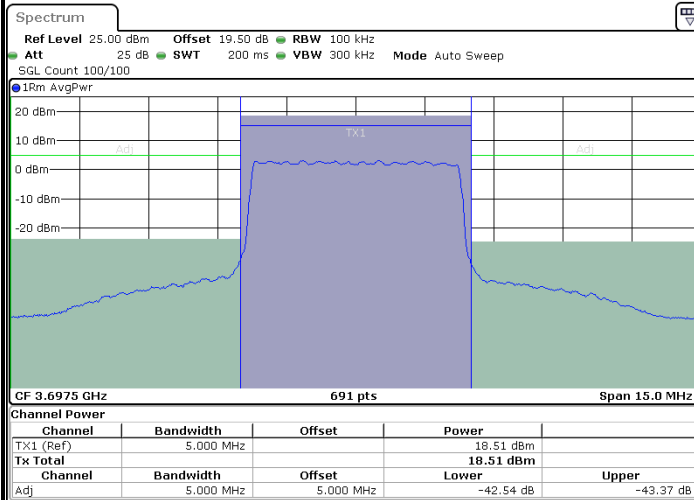

Date: 27 MAR 2024 20:20:17


N/A



LTE Band 48 / 10MHz


64QAM

Lowest Channel / 1RB0

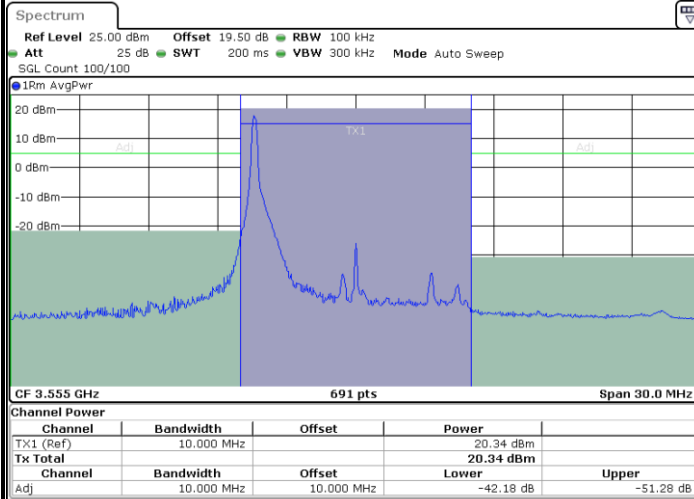


Date: 27 MAR 2024 20:55:06

Lowest Channel / 1RBmax

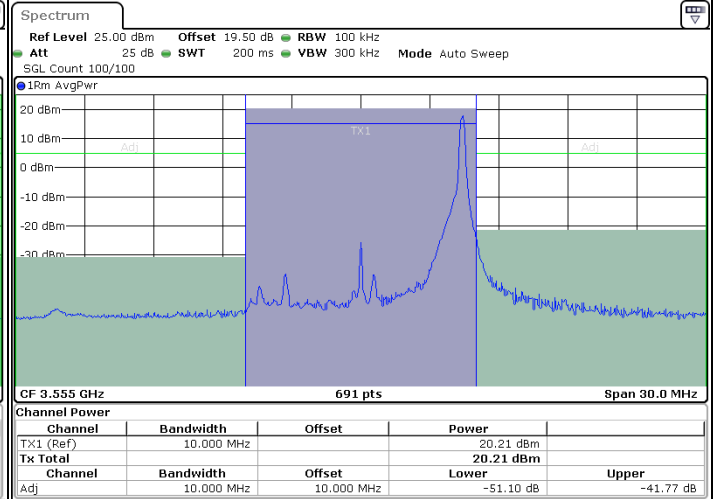

Date: 27 MAR 2024 20:51:12

Lowest Channel / FullIRB

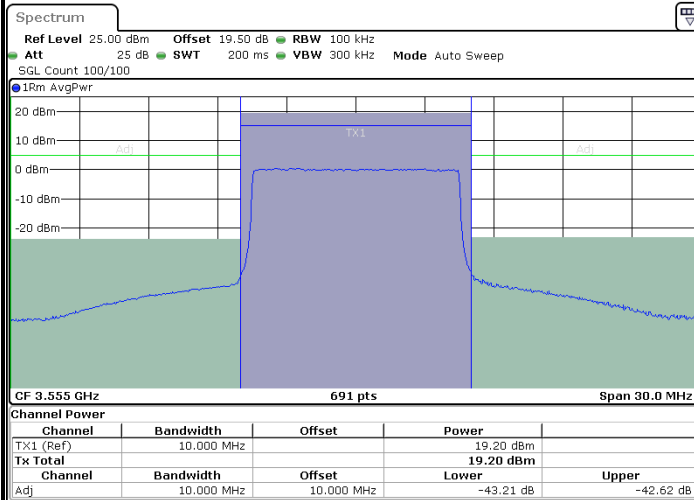

Date: 27 MAR 2024 20:50:25


N/A



LTE Band 48 / 10MHz


64QAM

Middle Channel / 1RB0

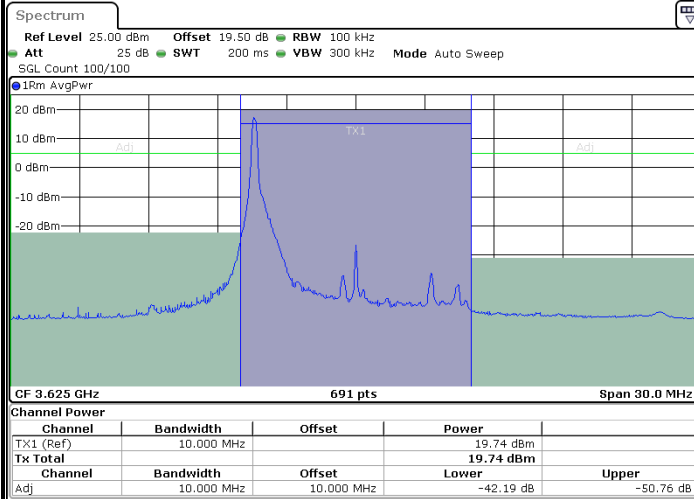


Date: 27 MAR 2024 21:17:56

Middle Channel / 1RBmax

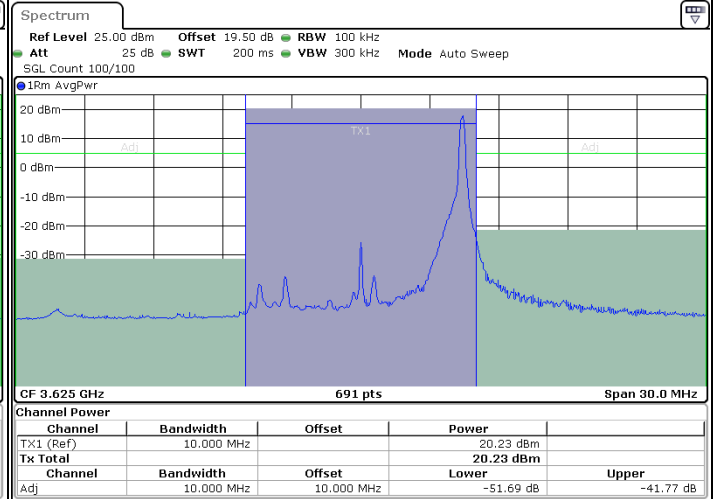

Date: 27 MAR 2024 21:21:49

Middle Channel / FullRB

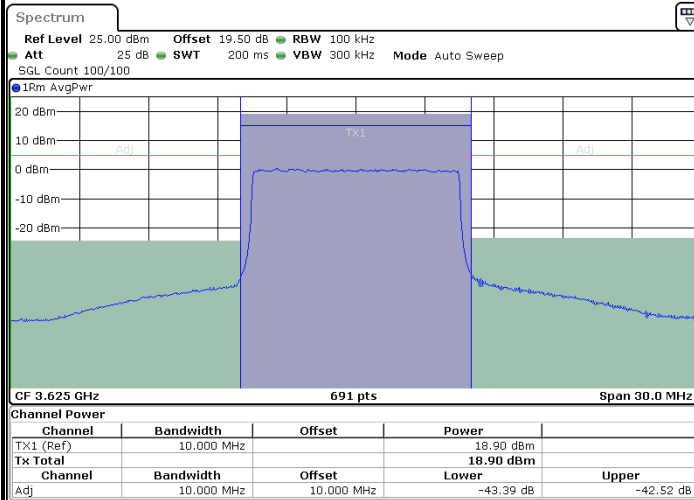

Date: 27 MAR 2024 21:22:36


N/A



LTE Band 48 / 10MHz


64QAM

Highest Channel / 1RB0

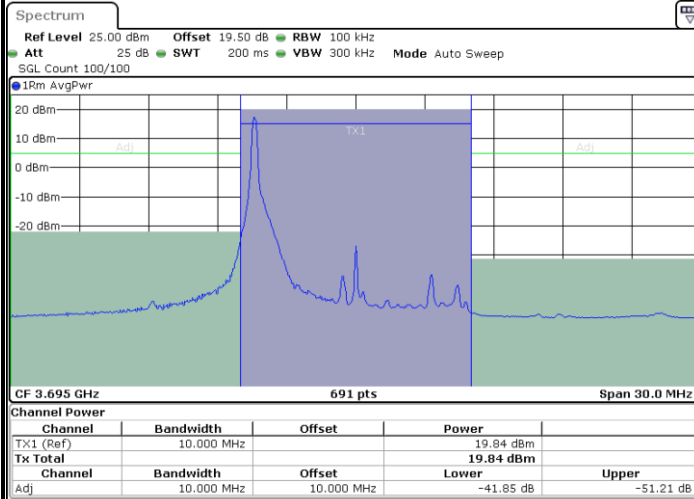


Date: 27 MAR 2024 21:54:41

Highest Channel / 1RBmax

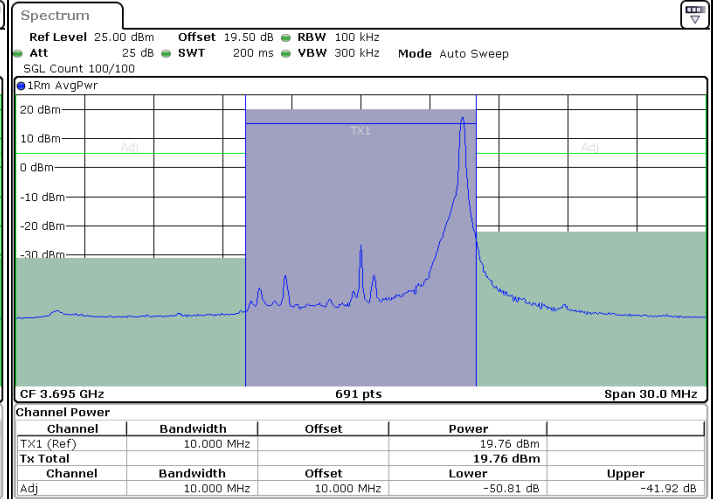

Date: 27 MAR 2024 21:50:43

Highest Channel / FullRB

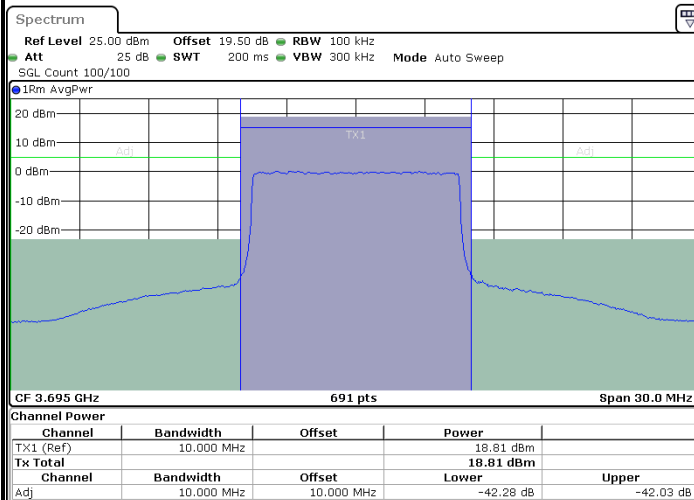

Date: 27 MAR 2024 21:49:55


N/A



LTE Band 48 / 15MHz


64QAM

Lowest Channel / 1RB0

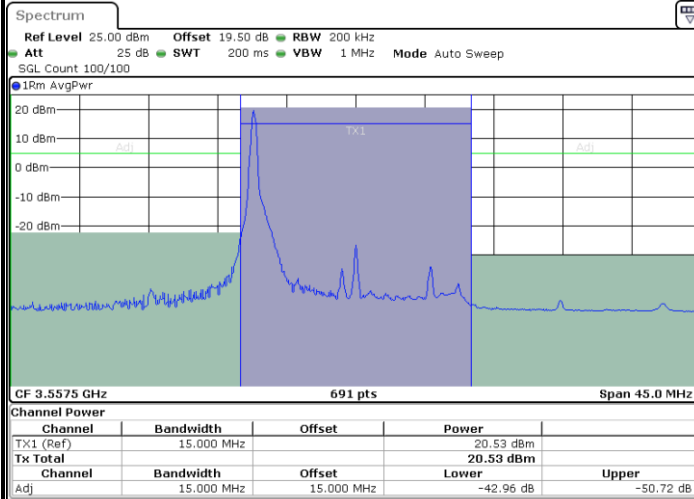


Date: 27 MAR 2024 22:25:07

Lowest Channel / 1RBmax

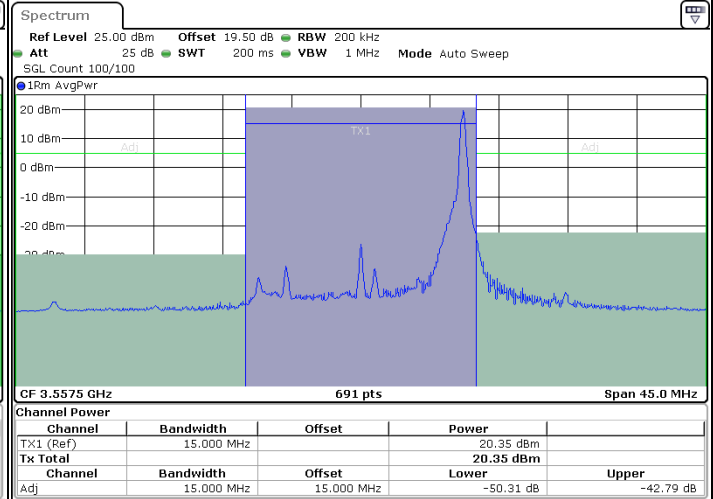

Date: 27 MAR 2024 22:21:11

Lowest Channel / FullIRB

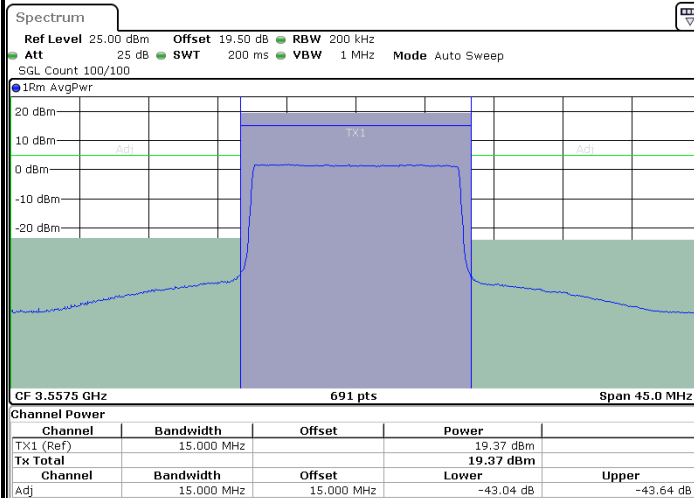

Date: 27 MAR 2024 22:20:24


N/A



LTE Band 48 / 15MHz


64QAM

Middle Channel / 1RB0

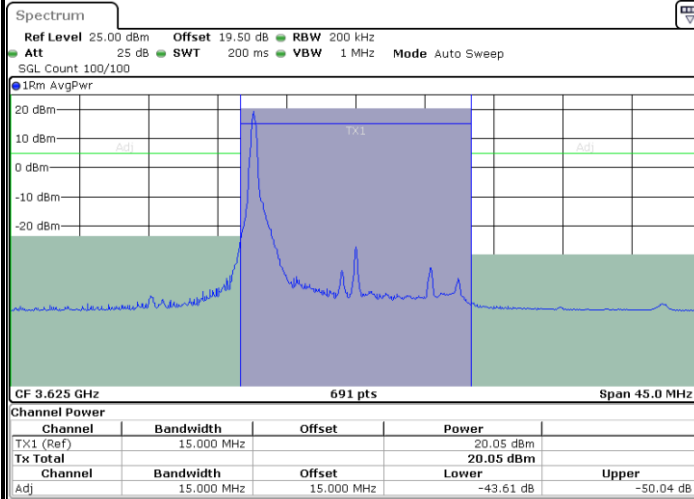


Date: 27 MAR 2024 22:47:57

Middle Channel / 1RBmax

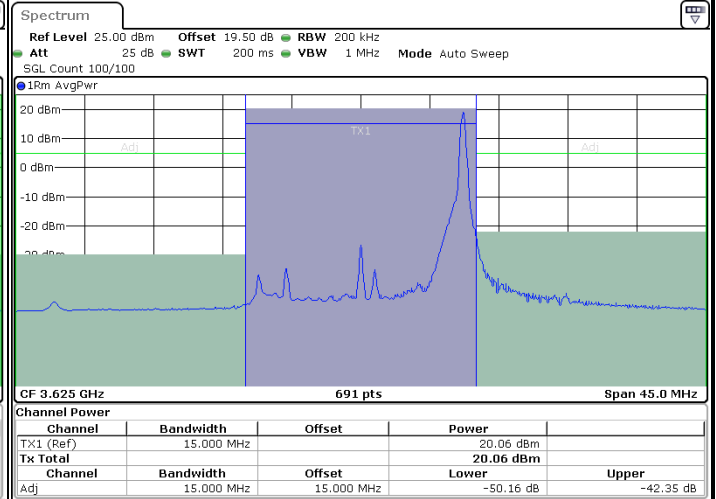

Date: 27 MAR 2024 22:51:49

Middle Channel / FullRB

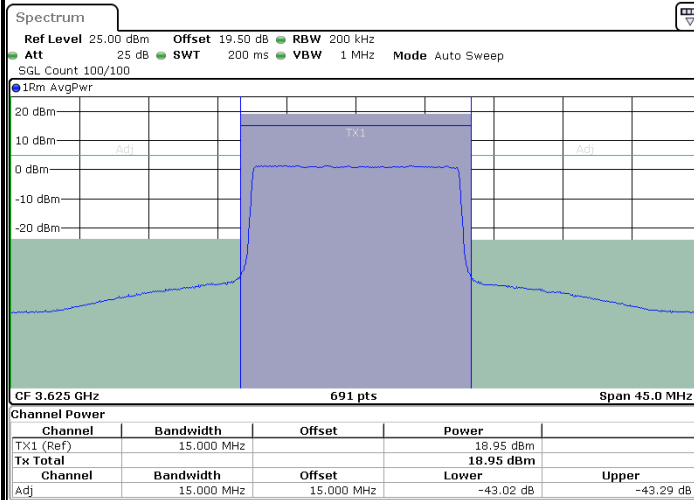

Date: 27 MAR 2024 22:52:35


N/A



LTE Band 48 / 15MHz


64QAM

Highest Channel / 1RB0

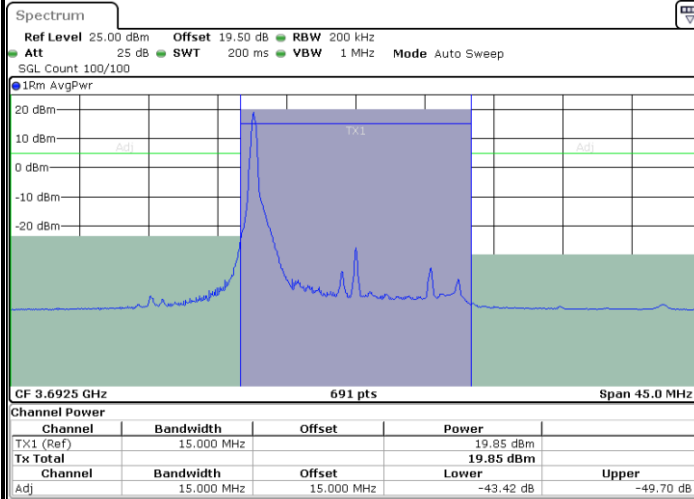


Date: 27 MAR 2024 23:24:37

Highest Channel / 1RBmax

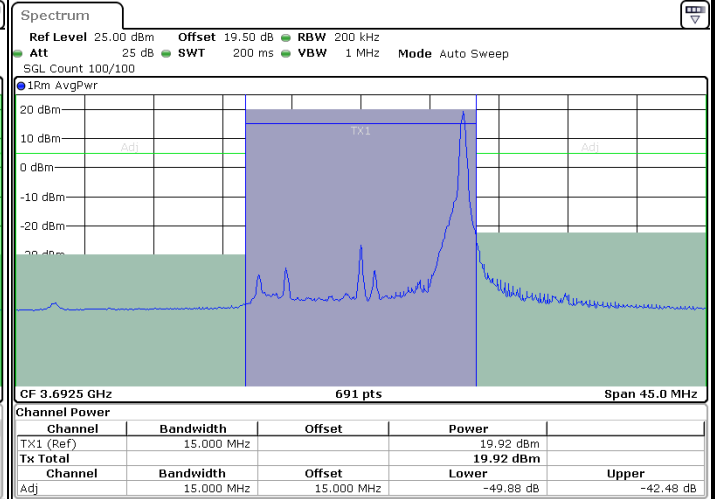

Date: 27 MAR 2024 23:20:38

Highest Channel / FullRB

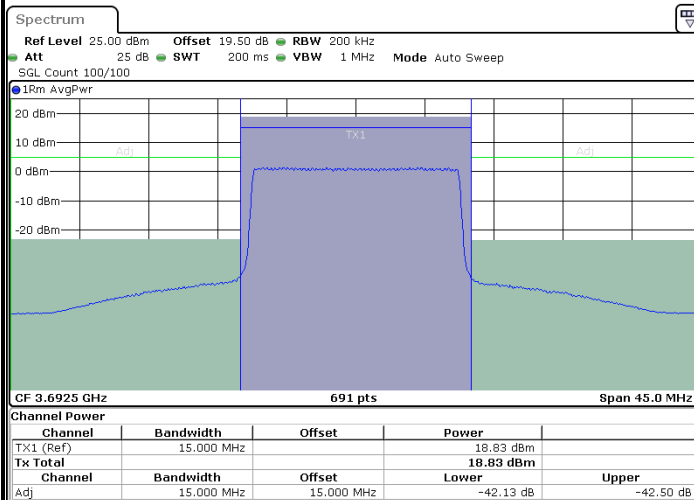

Date: 27 MAR 2024 23:19:50


N/A



LTE Band 48 / 20MHz


64QAM

Lowest Channel / 1RB0

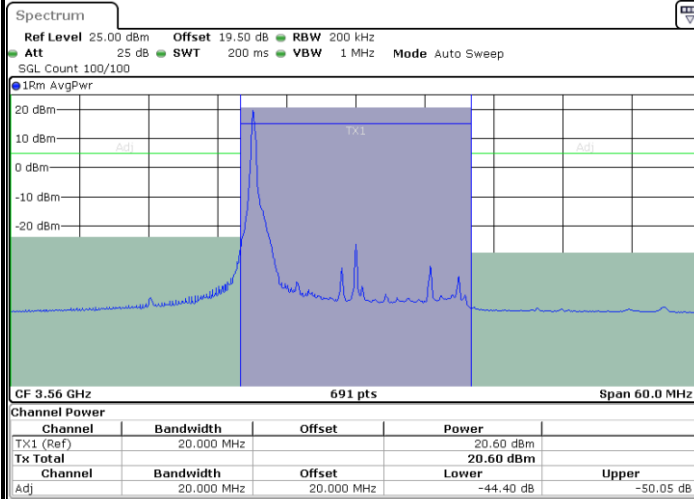


Date: 27 MAR 2024 23:52:49

Lowest Channel / 1RBmax

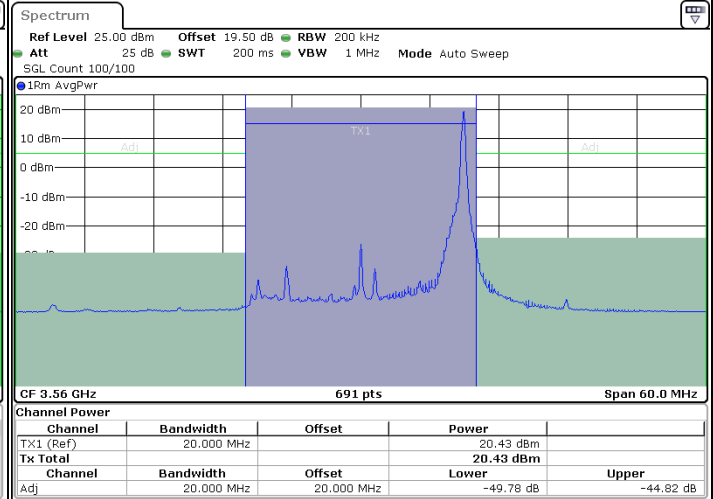

Date: 27 MAR 2024 23:52:02

Lowest Channel / FullIRB

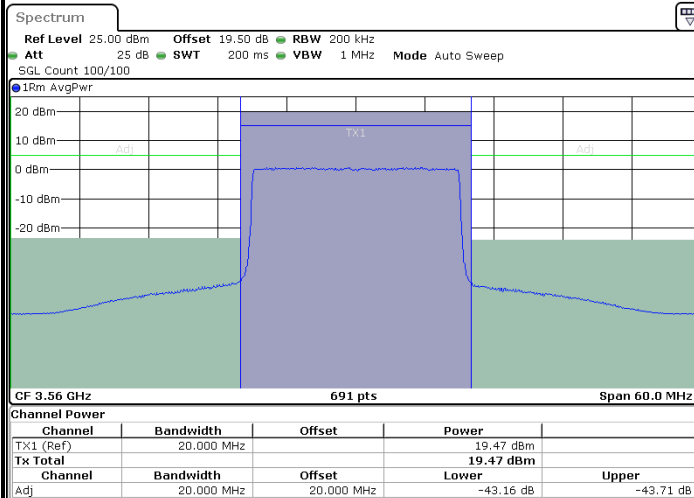

Date: 27 MAR 2024 23:49:44


N/A



LTE Band 48 / 20MHz


64QAM

Middle Channel / 1RB0

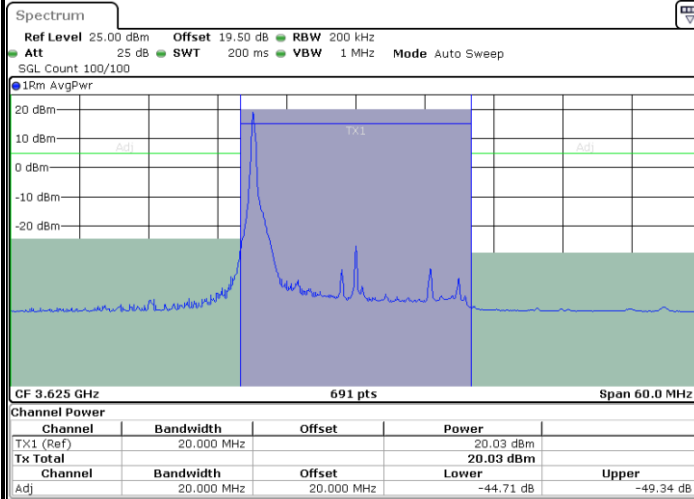


Date: 28 MAR 2024 00:18:46

Middle Channel / 1RBmax

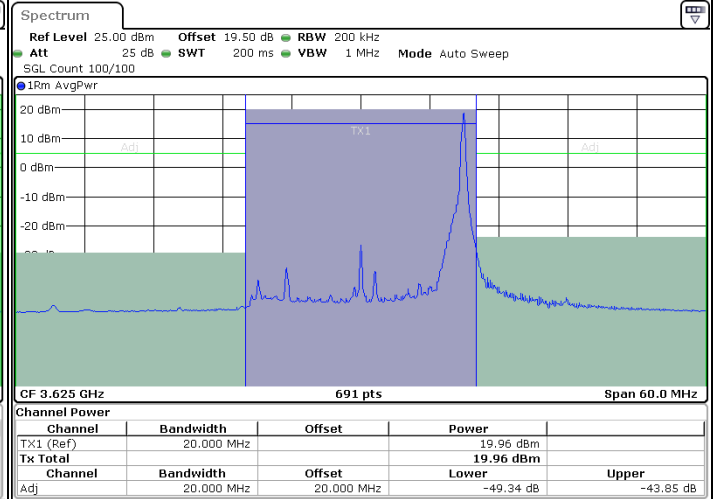

Date: 28 MAR 2024 00:19:32

Middle Channel / FullRB

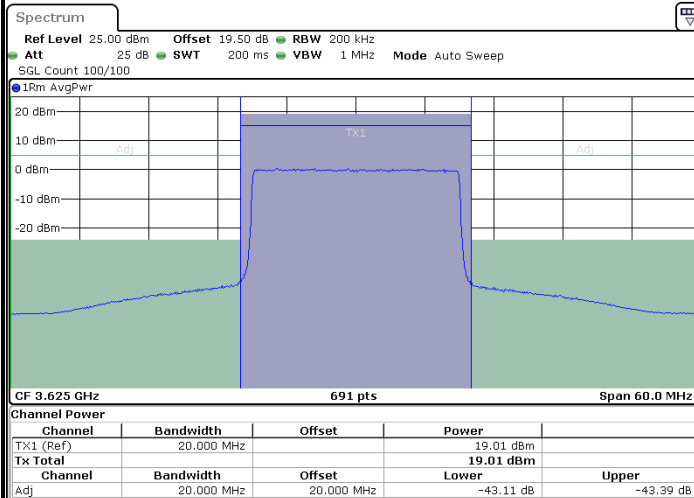

Date: 28 MAR 2024 00:23:20


N/A



LTE Band 48 / 20MHz


64QAM

Highest Channel / 1RB0

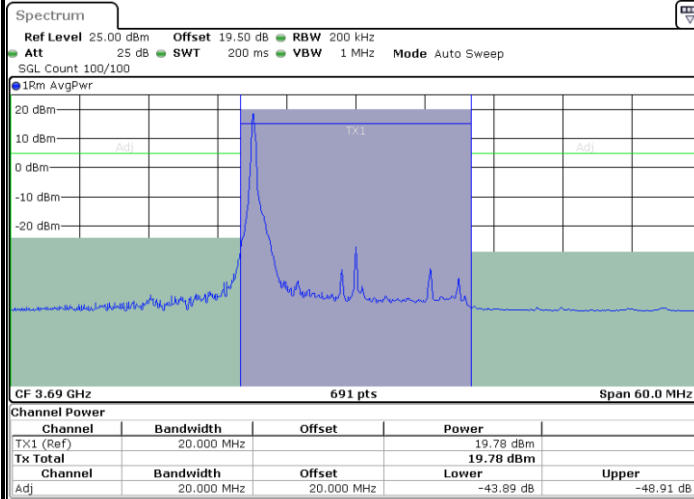


Date: 28 MAR 2024 00:53:27

Highest Channel / 1RBmax

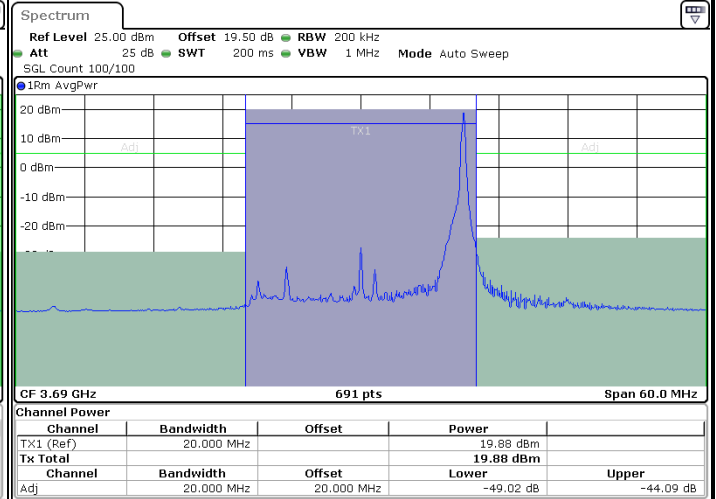


Date: 28 MAR 2024 00:52:41

Highest Channel / FullRB

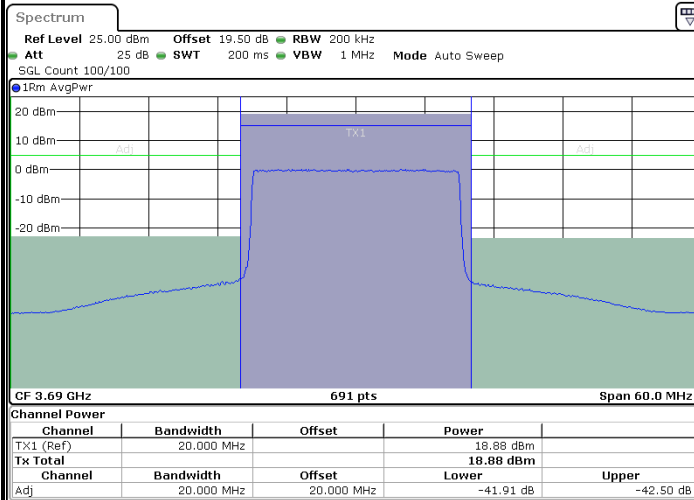


Date: 28 MAR 2024 00:48:50


N/A

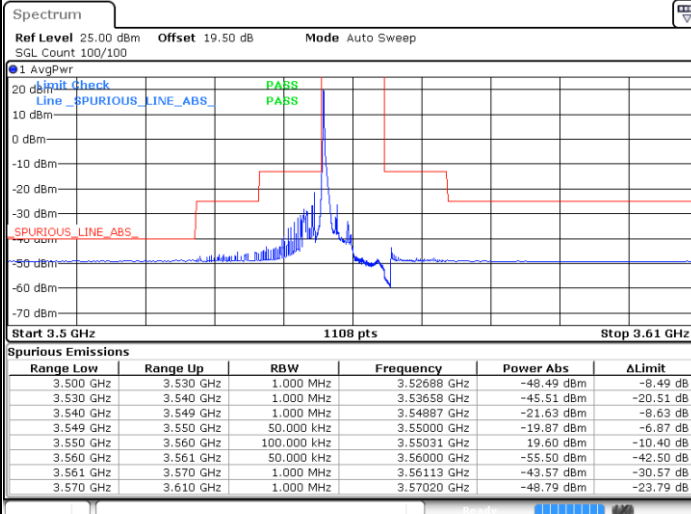**Conducted Band Edge****LTE Band 48 / 5MHz****QPSK****Lowest Channel / 1RB0****Lowest Channel / 1RBmax**

Date: 27 MAR 2024 19:40:06

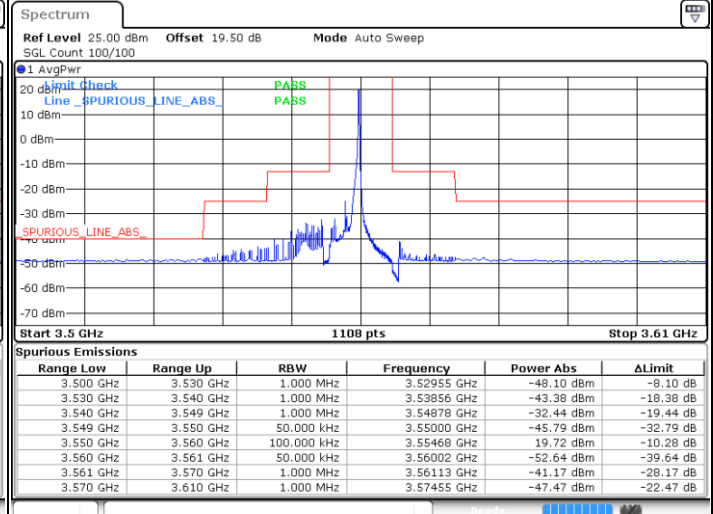

Date: 27 MAR 2024 19:38:00

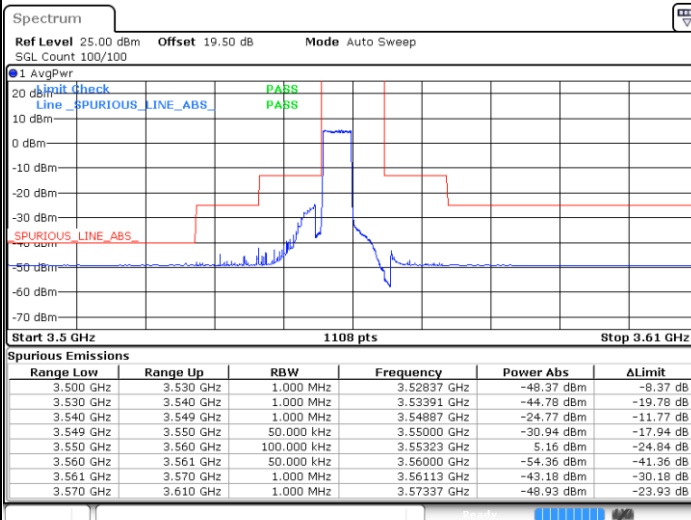Lowest Channel / FullIRB**N/A**


Date: 27 MAR 2024 19:27:28



LTE Band 48 / 5MHz


QPSK

Middle Channel / 1RB0

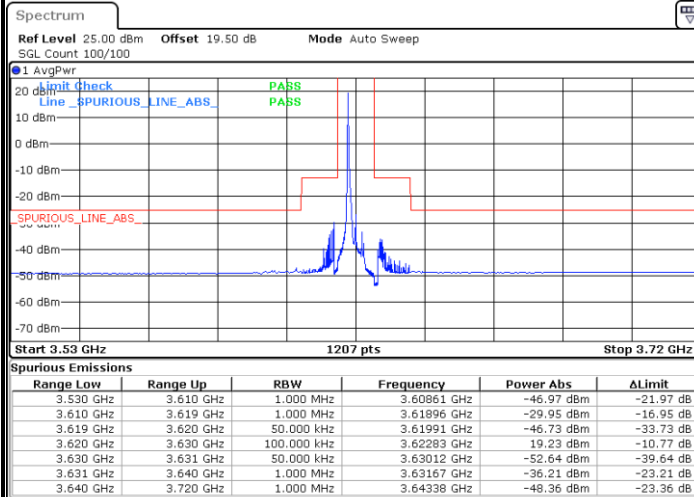


Date: 27 MAR 2024 20:00:51

Middle Channel / 1RBmax

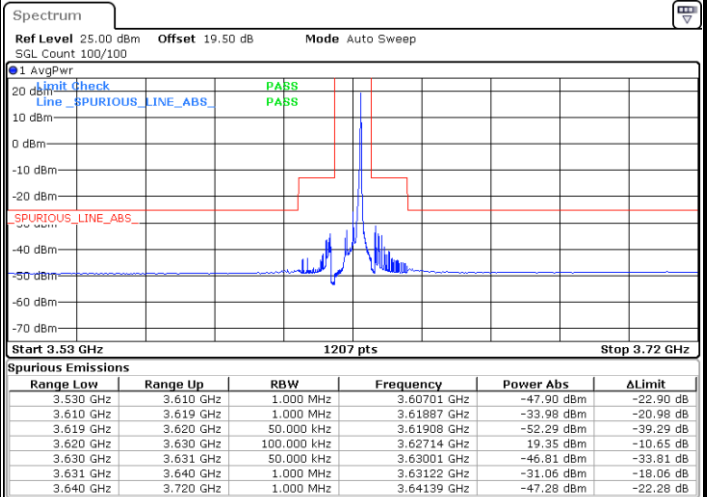

Date: 27 MAR 2024 20:02:57

Middle Channel / FullIRB

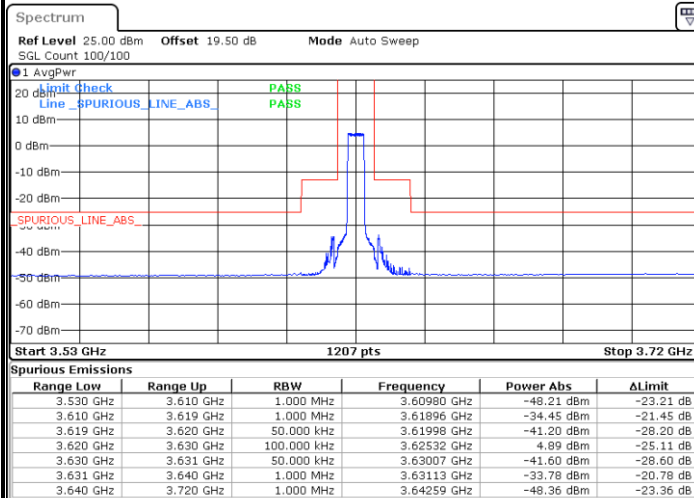

Date: 27 MAR 2024 20:13:28

N/A