



FCC RADIO TEST REPORT

FCC ID : B94HNI69CKLR
Equipment : Tablet
Brand Name : HP
Model Name : HSN-I69C
Applicant : HP Inc.
1501 Page Mill Road, Palo Alto CA, 94304, USA
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27D, Part
90(R), Part 90(S)

The product was received on May 15, 2026 and testing was performed from Jul. 07, 2026 to Sep. 04, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.26-2015 and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	7
1.1 Product Feature of Equipment Under Test.....	7
1.2 Modification of EUT	8
1.3 Testing Location	9
1.4 Applicable Standards.....	9
2 Test Configuration of Equipment Under Test	10
2.1 Test Mode.....	10
2.2 Connection Diagram of Test System.....	11
2.3 Support Unit used in test configuration and system	11
2.4 Frequency List of Low/Middle/High Channels	12
3 Conducted Test Items.....	32
3.1 Measuring Instruments	32
3.2 Conducted Output Power and ERP/EIRP	33
4 Radiated Test Items	34
4.1 Measuring Instruments	34
4.2 Radiated Spurious Emission Measurement	36
5 List of Measuring Equipment.....	38
6 Measurement Uncertainty	40
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FG651406-01C	01	Initial issue of report	Sep. 07, 2026
FG651406-01C	02	Revise section 2.4 and appendix A. This report is an updated version, replacing the report issued on Sep. 07, 2026.	Sep. 11, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(5) §90.635	Effective Radiated Power (n5) (n26)	Pass	
	§27.50 (b)(10) §27.50 (c)(10)	Effective Radiated Power (n12) (n13) (n71)		
	§24.232 (c) §27.50 (h)(2)	Equivalent Isotropic Radiated Power (n2) (n25) (n7) (n38) (n41)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (n66) (n70)		
	§27.50 (j)(3)	Equivalent Isotropic Radiated Power (n77) (n78)		
	§27.50 (k)(3)	Equivalent Isotropic Radiated Power (n77) (n78)		
	§27.50 (a)(3)	Equivalent Isotropic Radiated Power (n30)		
	§90.542 (a)(7)	Effective Radiated Power (n14)		
-	§24.232 (d) §27.50 (d)(5)	Peak-to-Average Ratio	Pass	See Note
-	§2.1049	Occupied Bandwidth	Pass	See Note
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (c)(2)(4) §27.53 (g) §27.53 (h)	Conducted Band Edge Measurement (n2) (n5) (n12) (n13) (n25) (n26) (n66) (n71)	Pass	See Note
	§2.1051 §27.53 (m)(4)	Conducted Band Edge Measurement (n7) (n38) (n41)		
	§2.1051 §27.53 (l)(2)	Conducted Band Edge Measurement (n77) (n78)		
	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement (n77) (n78)		
	§2.1051 §27.53 (a)(4)	Conducted Band Edge Measurement (n30)		
	§2.1051 §90.543 (e)(2)	Conducted Band Edge Measuremen (n14)		
-	§2.1051 §90.210 (n)	Emission Mask (n14)	Pass	See Note
	§2.1051 §90.691	Emission masks (n26)		



Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (c)(2) §27.53 (g) §27.53 (h) §90.691	Conducted Spurious Emission (n2) (n5) (n12) (n13) (n25) (n26) (n66) (n71)	Pass	See Note
	§2.1051 §27.53 (m)(4)	Conducted Spurious Emission (n7) (n38) (n41)		
	§2.1051 §27.53 (l)(2)	Conducted Spurious Emission (n77) (n78)		
	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission (n77) (n78)		
	§2.1051 §27.53 (a)(4)	Conducted Spurious Emission (n30)		
	§2.1051 §90.543 (e)(3)	Conducted Spurious Emission (n14)		
-	§2.1055 §22.355 §24.235 §27.54 §90.539 (e)§90.213	Frequency Stability Temperature & Voltage	Pass	See Note



Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
4.2	§2.1053 §22.917 (a) §24.238 (a) §27.53 (c)(2) §27.53 (f) §27.53 (g) §27.53 (h)§90.691	Radiated Spurious Emission (n2) (n5) (n12) (n13) (n25) (n26) (n66) (n71)	Pass	-
	§2.1053 §27.53 (m)(4)	Radiated Spurious Emission (n7) (n38) (n41)		
	§2.1053 §27.53 (l)(2)	Radiated Spurious Emission (n77) (n78)		
	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission (n77) (n78)		
	§2.1053 §27.53 (a)(4)	Radiated Spurious Emission (n30)		
	§2.1053 §90.543 (e)(3) §90.543 (f)	Radiated Spurious Emission (n14)		

Remark:

- For host device, Radiated Spurious Emission, Effective Radiated Power and Equivalent Isotropic Radiated Power are verified and comply with the limit in this test report.
- For host device, the Conducted Output Power is no difference after compared to module (Model: RW350R-GL)

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sheng Kuo**Report Producer: Freda Wu**



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs	WCDMA/LTE/5G NR, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax/be, Wi-Fi 5GHz 802.11a/n/ac/ax/be, Wi-Fi 6GHz 802.11ax/be and GNSS.
Integrated WLAN Module	Brand Name: Intel Model Name: BE211D2W FCC ID: PD9BE211D2
Antenna Type	WWAN: PIFA Antenna WLAN: <Main>: PIFA Antenna <Aux.>: PIFA Antenna Bluetooth: PIFA Antenna GPS/Glonass/BDS/Galileo: PIFA Antenna

Support band and evaluated information	
Supported band	n2, n5, n7, n12, n13, n14, n25, n26, n30, n38, n41, n66, n71, n77, n78
Evaluated and Tested band	n2, n5, n7, n12, n13, n14, n25, n26, n30, n38, n41, n66, n71, n77, n78
Band covered information	Wider operating frequency band range covers narrower one when the power is worse as follows: ■ n25 cover n2 (Part 24) ■ n26 cover n5 (Part 22) ■ n41 cover n38 (Part 27) ■ n77 cover n78 (Part 27)

TDD band Power Class		
	PC3	PC2
n38	V	-
n41	V	V
n77	V	V
n78	V	V



WWAN Antenna Information				
Antenna 5	Manufacturer	Vendor 1	Peak gain (dBi)	5G NR n2: 1.33 5G NR n5: 0.70 5G NR n12: 1.72 5G NR n14: -0.38 5G NR n25: 1.09 5G NR n26: 0.60 5G NR n41: -0.47 5G NR n71: -1.85 5G NR n77: -0.28 5G NR n78: 0.15
	Part number	6036B0401201 (260-27614)	Type	PIFA
Antenna 8	Manufacturer	Vendor 1	Peak gain (dBi)	5G NR n2: 0.29 5G NR n7: -0.07 5G NR n25: 0.36 5G NR n30: -0.34 5G NR n38: -0.07 5G NR n41: -0.39 5G NR n66: 1.36 5G NR n77: -0.67 5G NR n78: -1.69
	Part number	6036B0401001 (260-27617)	Type	PIFA

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	TH05-HY	03CH12-HY
Test Engineer	Luffy Lin	Gerry Wei, Tim Lee and Wilson Wu
Temperature (°C)	20.1~24.5	23.6~24.1
Relative Humidity (%)	45.3~54.7	53.5~56.7

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27D, Part 90(R), Part 90(S)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and only the worst case emissions were reported in this report..


Modulation Type	Modulation	Modulation Type	Modulation
A	DFT-s-OFDM PI/2 BPSK	N/A	N/A
B	DFT-s-OFDM QPSK	F	CP-OFDM QPSK
C	DFT-s-OFDM 16QAM	G	CP-OFDM 16QAM
D	DFT-s-OFDM 64QAM	H	CP-OFDM 64QAM
E	DFT-s-OFDM 256QAM	I	CP-OFDM 256QAM

Test Item	Modulation Type	Bandwidth	RB Size	Channel
Conducted Power	A, B, C	All	1RB	L, M, H
ERP/EIRP	A, B, C	All	1RB	L, M, H
RSE	A	Remark 8	1RB	L, M, H

Remark:

1. Evaluated all the transmitter signal and reporting worst-case configuration among all modulation types.
2. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst-case emissions are reported.
3. During the RSE preliminary test, the standalone mode and charging modes were verified. It is determined that the charging modes is the worst case for the official test.
4. For modulation of $\pi/2$ BPSK & QPSK & 16QAM, the maximum power of $\pi/2$ BPSK & QPSK & 16QAM is higher than other modulation (64QAM/256QAM), therefore, according to engineering evaluation, we choose higher power ($\pi/2$ BPSK & QPSK & 16QAM) to perform tests and show in the report.
5. For 5G NR n41, n77, n78 support PC2 & PC3, The PC2 & PC3 have the same modulation, EIRP power and BW. Therefore, the report only performed Higher Conducted power (PC2) test results.
6. Since 5G NR n2, n25, n41, n77, and n78 mainly use Antenna 8 for testing, Antenna 5 serves as the secondary antenna. Accordingly, the antenna 5 is used only for measuring $\pi/2$ -BPSK, QPSK, and 16QAM at the maximum bandwidth. At other bandwidths, only $\pi/2$ -BPSK is measured.
7. For 5G NR All Band SISO Mode support support CP-OFDM & DFT-s-OFDM, Therefore, the report only performed Higher Conducted power (DFT-s-OFDM) test results.
8. Based on the module report RSE test results, verify the worst condition.

2.2 Connection Diagram of Test System

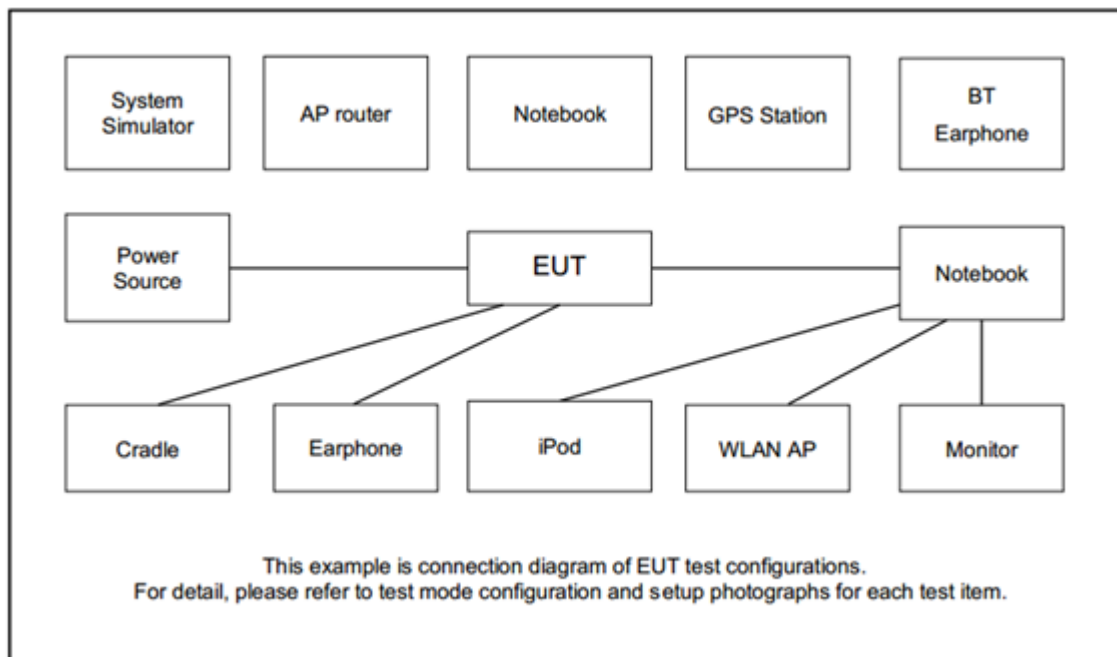

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	8000A	N/A	N/A	Unshielded, 1.8 m
2.	Base Station	Anritsu	8820C	N/A	N/A	Unshielded, 1.8 m



2.4 Frequency List of Low/Middle/High Channels

<SCS15K>

5G NR n2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
30	Channel	373000	376000	379000
	Frequency	1865	1880	1895
25	Channel	372500	376000	379500
	Frequency	1862.5	1880	1897.5
20	Channel	372000	376000	380000
	Frequency	1860	1880	1900
15	Channel	371500	376000	380500
	Frequency	1857.5	1880	1902.5
10	Channel	371000	376000	381000
	Frequency	1855	1880	1905
5	Channel	370500	376000	381500
	Frequency	1852.5	1880	1907.5

5G NR n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
25	Channel		167300	
	Frequency		836.5	
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5



5G NR n7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Channel	505000	507000	509000
	Frequency	2525	2535	2545
40	Channel	504000	507000	510000
	Frequency	2520	2535	2550
30	Channel	503000	507000	511000
	Frequency	2515	2535	2555
25	Channel	502500	507000	511500
	Frequency	2512.5	2535	2557.5
20	Channel	502000	507000	512000
	Frequency	2510	2535	2560
15	Channel	501500	507000	512500
	Frequency	2507.5	2535	2562.5
10	Channel	501000	507000	513000
	Frequency	2505	2535	2565
5	Channel	500500	507000	513500
	Frequency	2502.5	2535	2567.5

5G NR n12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	141300	141500	141700
	Frequency	706.5	707.5	708.5
10	Channel	140800	141500	142200
	Frequency	704	707.5	711
5	Channel	140300	141500	142700
	Frequency	701.5	707.5	713.5



5G NR n14 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	158600	-
	Frequency	-	793	-
5	Channel	158100	158600	159100
	Frequency	790.5	793	795.5

5G NR n25 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
45	Channel	374500	376500	378500
	Frequency	1872.5	1882.5	1892.5
40	Channel	374000	376500	379000
	Frequency	1870	1882.5	1895
35	Channel	373500	376500	379500
	Frequency	1867.5	1882.5	1897.5
30	Channel	373000	376500	380000
	Frequency	1865	1882.5	1900
25	Channel	372500	376500	380500
	Frequency	1862.5	1882.5	1902.5
20	Channel	372000	376500	381000
	Frequency	1860	1882.5	1905
15	Channel	371500	376500	381500
	Frequency	1857.5	1882.5	1907.5
10	Channel	371000	376500	382000
	Frequency	1855	1882.5	1910
5	Channel	370500	376500	382500
	Frequency	1852.5	1882.5	1912.5



5G NR n26 Channel and Frequency List (Part22H)				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5

5G NR n26 Channel and Frequency List (Part90S)				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	163800	-
	Frequency	-	819	-
5	Channel	163300	163800	164300
	Frequency	816.5	819	821.5

5G NR n26 Straddle Channel and Frequency List (Part 90S)				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	-	164800	-
	Frequency	-	824	-
15	Channel	-	164800	-
	Frequency	-	824	-
10	Channel	-	164800	-
	Frequency	-	824	-
5	Channel	-	164800	-
	Frequency	-	824	-



5G NR n30 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	27710	-
	Frequency	-	2310	-
5	Channel	27685	27710	27735
	Frequency	2307.5	2310	2312.5

5G NR n38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	518000	519000	520000
	Frequency	2590	2595	2600
30	Channel	517000	519000	521000
	Frequency	2585	2595	2605
25	Channel	516500	519000	521500
	Frequency	2582.5	2595	2607.5
20	Channel	516000	519000	522000
	Frequency	2580	2595	2610
15	Channel	515500	519000	522500
	Frequency	2577.5	2595	2612.5
10	Channel	515000	519000	523000
	Frequency	2575	2595	2615
5	Channel	514500	519000	523500
	Frequency	2572.5	2595	2617.5



5G NR n41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Channel	504204	518598	532998
	Frequency	2521.02	2592.99	2664.99
40	Channel	503202	518598	534000
	Frequency	2516.01	2592.99	2670
30	Channel	502200	518598	534996
	Frequency	2511	2592.99	2674.98
20	Channel	501204	518598	535998
	Frequency	2506.02	2592.99	2679.99
15	Channel	500700	518598	536496
	Frequency	2503.5	2592.99	2682.48
10	Channel	500202	518598	537000
	Frequency	2501.01	2592.99	2685

5G NR n66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
45	Channel	346500	349000	351500
	Frequency	1732.5	1745	1757.5
40	Channel	346000	349000	352000
	Frequency	1730	1745	1760
35	Channel	345500	349000	352500
	Frequency	1727.5	1745	1762.5
30	Channel	345000	349000	353000
	Frequency	1725	1745	1765
25	Channel	344500	349000	353500
	Frequency	1722.5	1745	1767.5
20	Channel	344000	349000	354000
	Frequency	1720	1745	1770
15	Channel	343500	349000	354500
	Frequency	1717.5	1745	1772.5
10	Channel	343000	349000	355000
	Frequency	1715	1745	1775
5	Channel	342500	349000	355500
	Frequency	1712.5	1745	1777.5



5G NR n71 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	134600	136100	137600
	Frequency	673	680.5	688
15	Channel	134100	136100	138100
	Frequency	670.5	680.5	690.5
10	Channel	133600	136100	138600
	Frequency	668	680.5	693
5	Channel	133100	136100	139100
	Frequency	665.5	680.5	695.5

5G NR Band n77 (Part270) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Channel	648334	656000	663666
	Frequency	3725.01	3840	3954.99
40	Channel	648000	656000	664000
	Frequency	3720	3840	3960
30	Channel	647668	656000	664332
	Frequency	3715.02	3840	3965
20	Channel	647334	656000	664666
	Frequency	3710.01	3840	3969.99
15	Channel	647168	656000	664832
	Frequency	3707.52	3840	3972.48
10	Channel	647000	656000	665000
	Frequency	3705	3840	3975



5G NR n78 (Part27O) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Channel	648334	650000	651666
	Frequency	3725.01	3750	3774.99
40	Channel	648000	650000	652000
	Frequency	3720	3750	3780
30	Channel	647668	650000	652332
	Frequency	3715.02	3750	3784.98
20	Channel	647334	650000	652666
	Frequency	3710.01	3750	3789.99
15	Channel	647168	650000	652832
	Frequency	3707.52	3750	3792.48
10	Channel	647000	650000	653000
	Frequency	3705	3750	3795

5G NR Band n77 (Part27Q) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98



5G NR n78 (Part27Q) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98



<SCS30K>

5G NR n2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
30	Channel	373000	376000	379000
	Frequency	1865	1880	1895
25	Channel	372500	376000	379500
	Frequency	1862.5	1880	1897.5
20	Channel	372000	376000	380000
	Frequency	1860	1880	1900
15	Channel	371500	376000	380500
	Frequency	1857.5	1880	1902.5
10	Channel	371000	376000	381000
	Frequency	1855	1880	1905

5G NR n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
25	Channel		167300	
	Frequency		836.5	
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844



5G NR n7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Channel	505000	507000	509000
	Frequency	2525	2535	2545
40	Channel	504000	507000	510000
	Frequency	2520	2535	2550
30	Channel	503000	507000	511000
	Frequency	2515	2535	2555
25	Channel	502500	507000	511500
	Frequency	2512.5	2535	2557.5
20	Channel	502000	507000	512000
	Frequency	2510	2535	2560
15	Channel	501500	507000	512500
	Frequency	2507.5	2535	2562.5
10	Channel	501000	507000	513000
	Frequency	2505	2535	2565

5G NR n12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	141300	141500	141700
	Frequency	706.5	707.5	708.5
10	Channel	140800	141500	142200
	Frequency	704	707.5	711

5G NR n14 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	158600	-
	Frequency	-	793	-
5G NR n25 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
45	Channel	374500	376500	378500
	Frequency	1872.5	1882.5	1892.5
40	Channel	374000	376500	379000
	Frequency	1870	1882.5	1895
35	Channel	373500	376500	379500
	Frequency	1867.5	1882.5	1897.5
30	Channel	373000	376500	380000
	Frequency	1865	1882.5	1900
25	Channel	372500	376500	380500
	Frequency	1862.5	1882.5	1902.5
20	Channel	372000	376500	381000
	Frequency	1860	1882.5	1905
15	Channel	371500	376500	381500
	Frequency	1857.5	1882.5	1907.5
10	Channel	371000	376500	382000
	Frequency	1855	1882.5	1910



5G NR n26 Channel and Frequency List (Part22H)				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5G NR n26 Channel and Frequency List (Part90S)				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	163800	-
	Frequency	-	819	-
5G NR n26 Straddle Channel and Frequency List (Part 90S)				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	-	164800	-
	Frequency	-	824	-
15	Channel	-	164800	-
	Frequency	-	824	-
10	Channel	-	164800	-
	Frequency	-	824	-



5G NR n30 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	27710	-
	Frequency	-	2310	-
5G NR n38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	518000	519000	520000
	Frequency	2590	2595	2600
30	Channel	517000	519000	521000
	Frequency	2585	2595	2605
25	Channel	516500	519000	521500
	Frequency	2582.5	2595	2607.5
20	Channel	516000	519000	522000
	Frequency	2580	2595	2610
15	Channel	515500	519000	522500
	Frequency	2577.5	2595	2612.5
10	Channel	515000	519000	523000
	Frequency	2575	2595	2615



5G NR n41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	509202	518598	528000
	Frequency	2546.01	2592.99	2640
90	Channel	508200	518598	528996
	Frequency	2541	2592.99	2644.98
80	Channel	507204	518598	529998
	Frequency	2536.02	2592.99	2649.99
70	Channel	506202	518598	531000
	Frequency	2531.01	2592.99	2655
60	Channel	505200	518598	531996
	Frequency	2526	2592.99	2659.98
50	Channel	504204	518598	532998
	Frequency	2521.02	2592.99	2664.99
40	Channel	503202	518598	534000
	Frequency	2516.01	2592.99	2670
30	Channel	502200	518598	534996
	Frequency	2511	2592.99	2674.98
20	Channel	501204	518598	535998
	Frequency	2506.02	2592.99	2679.99
15	Channel	500700	518598	536496
	Frequency	2503.5	2592.99	2682.48
10	Channel	500202	518598	537000
	Frequency	2501.01	2592.99	2685



5G NR n66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
45	Channel	346500	349000	351500
	Frequency	1732.5	1745	1757.5
40	Channel	346000	349000	352000
	Frequency	1730	1745	1760
35	Channel	345500	349000	352500
	Frequency	1727.5	1745	1762.5
30	Channel	345000	349000	353000
	Frequency	1725	1745	1765
25	Channel	344500	349000	353500
	Frequency	1722.5	1745	1767.5
20	Channel	344000	349000	354000
	Frequency	1720	1745	1770
15	Channel	343500	349000	354500
	Frequency	1717.5	1745	1772.5
10	Channel	343000	349000	355000
	Frequency	1715	1745	1775

5G NR n71 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	134600	136100	137600
	Frequency	673	680.5	688
15	Channel	134100	136100	138100
	Frequency	670.5	680.5	690.5
10	Channel	133600	136100	138600
	Frequency	668	680.5	693



5G NR Band n77 (Part270) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000	656000	662000
	Frequency	3750	3840	3930
90	Channel	649668	656000	662332
	Frequency	3745.02	3840	3934.98
80	Channel	649334	656000	662666
	Frequency	3740.01	3840	3939.99
70	Channel	649000	656000	663000
	Frequency	3735	3840	3945
60	Channel	648668	656000	663332
	Frequency	3730.02	3840	3949.98
50	Channel	648334	656000	663666
	Frequency	3725.01	3840	3954.99
40	Channel	648000	656000	664000
	Frequency	3720	3840	3960
30	Channel	647668	656000	664332
	Frequency	3715.02	3840	3965
20	Channel	647334	656000	664666
	Frequency	3710.01	3840	3969.99
15	Channel	647168	656000	664832
	Frequency	3707.52	3840	3972.48
10	Channel	647000	656000	665000
	Frequency	3705	3840	3975



5G NR n78 (Part270) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	650000	-
	Frequency	-	3750	-
90	Channel	649668	650000	650332
	Frequency	3745.02	3750	3754.98
80	Channel	649334	650000	650666
	Frequency	3740.01	3750	3759.99
70	Channel	649000	650000	651000
	Frequency	3735	6750	3765
60	Channel	648668	650000	651332
	Frequency	3730.02	3750	3769.98
50	Channel	648334	650000	651666
	Frequency	3725.01	3750	3774.99
40	Channel	648000	650000	652000
	Frequency	3720	3750	3780
30	Channel	647668	650000	652332
	Frequency	3715.02	3750	3784.98
20	Channel	647334	650000	652666
	Frequency	3710.01	3750	3789.99
15	Channel	647168	650000	652832
	Frequency	3707.52	3750	3792.48
10	Channel	647000	650000	653000
	Frequency	3705	3750	3795



5G NR Band n77 (Part27Q) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98



5G NR n78 (Part27Q) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98


3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.1.1 Test Setup

3.1.2 Conducted Output Power



3.1.3 Test Result of Conducted Test

Please refer to Appendix A.

3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for 5G NR n5, n26 (Part 22H)

The power of mobile transmitters must not exceed 100 Watts for 5G NR n26 (Part 90S)

The ERP of mobile transmitters must not exceed 3 Watts for 5G NR n12, n13, n14, n71

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n2, n25, n7, n38, n41

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n66, n77, n78

The EIRP of mobile transmitters must not exceed 250mW/5MHz for 5G NR n30

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

The MIMO mode is completely uncorrelated, so the directional gain is selected the maximum gain among all antennas.

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup


For radiated test below 30MHz

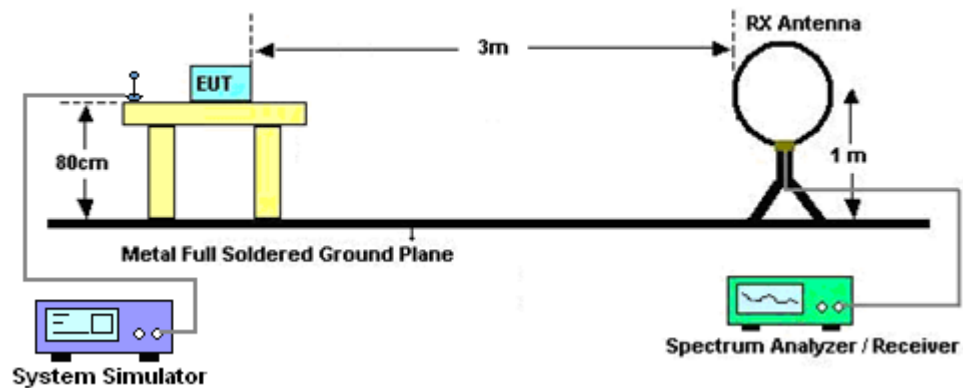


For radiated test from 30MHz to 1GHz

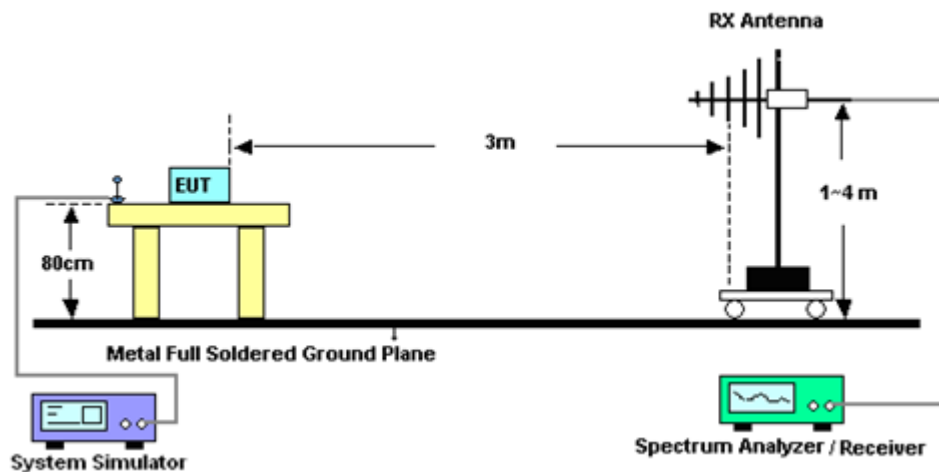

For radiated test from 1GHz to 18GHz

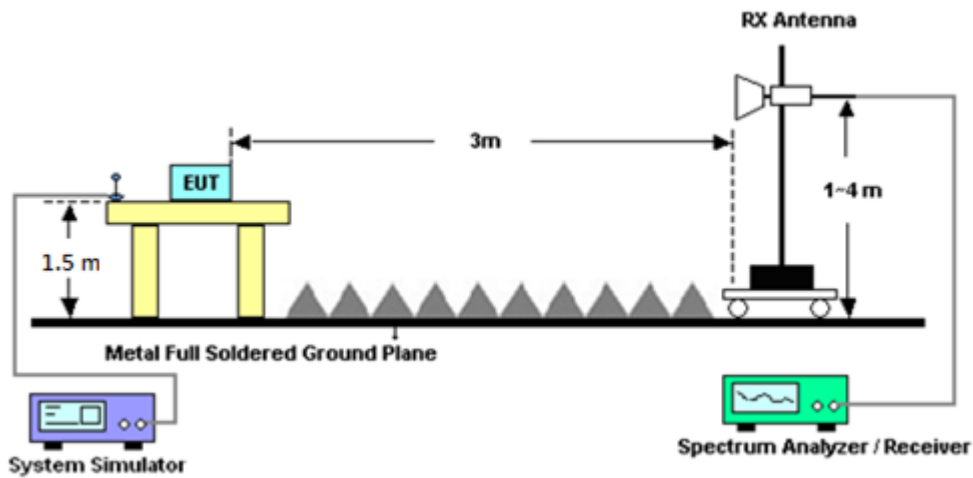

For radiated test above 18GHz

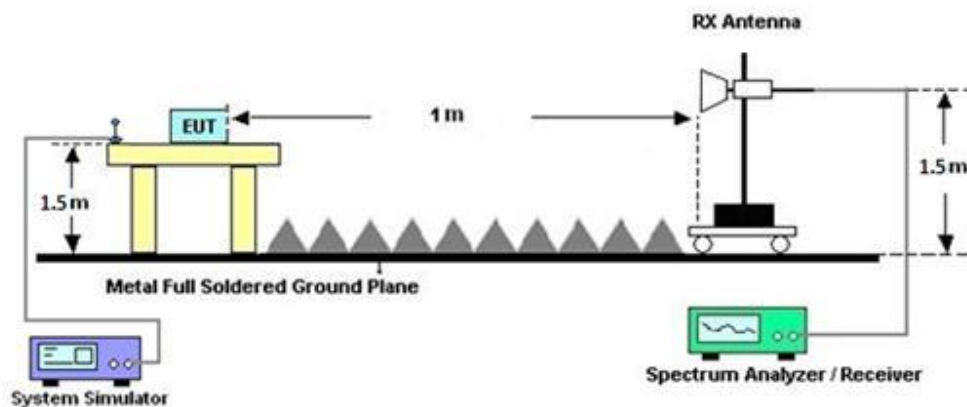

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.2 Radiated Spurious Emission Measurement

4.2.1 Description of Radiated Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB

For 5G NR n7, n38, n41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

For 5G NR n13

For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

For 5G NR n30

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $70 + 10 \log (P)$ dB.

For 5G NR n14

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.



4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI C63.26-2015 section 5.5.4 Radiated measurement using the field strength method.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. To convert spectrum reading E(dBuV/m) to EIRP(dBm)
$$\text{EIRP(dBm)} = \text{Level (dBuV/m)} + 20\log(d) - 104.77,$$
where d is the distance at which field strength limit is specified in the rules
7. Field Strength Level (dBm) = Spectrum Reading (dBm) + Antenna Factor + Cable Loss + Read Level - Preamp Factor.
8. ERP (dBm) = EIRP (dBm) - 2.15
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
The limit line is derived from $43 + 10\log(P)\text{dB}$ below the transmitter power P(Watts)
For 5G NR n30
The limit line is derived from $70 + 10\log(P)\text{dB}$ below the transmitter power P(Watts)
For 5G NR n7, n38, n41
The limit line is derived from $55 + 10\log(P)\text{dB}$ below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Mar. 16, 2026	Aug. 23, 2026~ Sep. 04, 2026	Mar. 15, 2027	Radiation (03CH12-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9 kHz~30 MHz	Dec. 11, 2025	Aug. 23, 2026~ Sep. 04, 2026	Dec. 10, 2026	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	37059 & 01	30MHz~1GHz	Nov. 26, 2025	Aug. 23, 2026~ Sep. 04, 2026	Nov. 25, 2026	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 18, 2026	Aug. 23, 2026~ Sep. 04, 2026	Mar. 17, 2027	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1212	1GHz~18GHz	Apr. 24, 2026	Aug. 23, 2026~ Sep. 04, 2026	Apr. 23, 2027	Radiation (03CH12-HY)
Amplifier	EMCI	EMC051845S E	980729	1-18GHz	Dec. 17, 2025	Aug. 23, 2026~ Sep. 04, 2026	Dec. 16, 2026	Radiation (03CH12-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Sep. 09, 2025	Aug. 23, 2026~ Sep. 04, 2026	Sep. 08, 2026	Radiation (03CH12-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290053	20Hz~26.5GHz	Sep. 08, 2025	Aug. 23, 2026~ Sep. 04, 2026	Sep. 07, 2026	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	1223	18GHz~40GHz	Aug. 12, 2026	Aug. 23, 2026~ Sep. 04, 2026	Aug. 11, 2027	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 02, 2025	Aug. 23, 2026~ Sep. 04, 2026	Dec. 01, 2026	Radiation (03CH12-HY)
Notch Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN111	1.53GHz Low Pass Filter	Nov. 04, 2025	Aug. 23, 2026~ Sep. 04, 2026	Nov. 03, 2026	Radiation (03CH12-HY)
Notch Filter	Wainwright	WHKX12-900- 1000-15000-6 0SS	SN11	1GHz High Pass Filter	Mar. 11, 2026	Aug. 23, 2026~ Sep. 04, 2026	Mar. 10, 2027	Radiation (03CH12-HY)
Notch Filter	Wainwright	WHKX12-2700 -3000-18000-6 0ST	SN2	3GHz High Pass Filter	Mar. 11, 2026	Aug. 23, 2026~ Sep. 04, 2026	Mar. 10, 2027	Radiation (03CH12-HY)
Notch Filter	Wainwright	WHKX8-5872. 5-6750-18000- 40ST	SN2	6.75GHz High Pass Filter	Mar. 11, 2026	Aug. 23, 2026~ Sep. 04, 2026	Mar. 10, 2027	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803955/2	30MHz~40GHz	Oct. 31, 2025	Aug. 23, 2026~ Sep. 04, 2026	Oct. 30, 2026	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Oct. 31, 2025	Aug. 23, 2026~ Sep. 04, 2026	Oct. 30, 2026	Radiation (03CH12-HY)
RF Cable	EMCI	EMC101Y-KM- KM-1000	240905	30MHz~40GHz	Oct. 31, 2025	Aug. 23, 2026~ Sep. 04, 2026	Oct. 30, 2026	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102/SUCOFLE X 104	EC-A5-300-5 757,805935/ 4	9kHz~30MHz	Oct. 01, 2025	Aug. 23, 2026~ Sep. 04, 2026	Sep. 30, 2026	Radiation (03CH12-HY)
Hygrometer	TECEPEL	DTM-303B	TP200722	N/A	Mar. 04, 2026	Aug. 23, 2026~ Sep. 04, 2026	Mar. 03, 2027	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Aug. 23, 2026~ Sep. 04, 2026	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Aug. 23, 2026~ Sep. 04, 2026	N/A	Radiation (03CH12-HY)
Radio Communicatio n Test Station	Anritsu	MT8000A	6262134933	FR1 (+MT8821C SN:6262116730)	May 13, 2025	Aug. 23, 2026~ Sep. 04, 2026	May 12, 2027	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Aug. 23, 2026~ Sep. 04, 2026	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	Aug. 23, 2026~ Sep. 04, 2026	N/A	Radiation (03CH12-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Temperature Chamber	ESPEC	SU-242	93000763	-30°C ~90°C	Jan. 05, 2026	Jul. 07, 2026 ~ Jul. 16, 2026	Jan. 04, 2027	Conducted (TH05-HY)
Hygrometer	TECPEL	DTM-303B	TP200886	NA	Mar. 04, 2026	Jul. 07, 2026 ~ Jul. 16, 2026	Mar. 03, 2027	Conducted (TH05-HY)
Radio Communication Test Station	Anritsu	MT8000A	6262186342	FR1	Nov. 03, 2025	Jul. 07, 2026 ~ Jul. 16, 2026	Nov. 03, 2026	Conducted (TH05-HY)
Software 1	Sporton	FCC 5GNR Test Tools Ver1.0	N/A	Conducted Test Item	N/A	Jul. 07, 2026 ~ Jul. 16, 2026	N/A	Conducted (TH05-HY)



6 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 6 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (6 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9 dB
---	--------

Appendix A. Test Results of Conducted Test

Conducted Output Power (Average power and ERP/EIRP)

<Antenna 5> <SCS 15kHz>

NR n5 Maximum Average Power [dBm] (GT - LC = 0.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
5	1	1	PI/2 BPSK	22.75	22.55	22.43	21.30	0.1349
5	1	1	QPSK	22.74	22.56	22.42		
5	1	1	16-QAM	21.89	21.77	21.52	20.44	0.1107
Limit	ERP < 7W			Result			Pass	

NR n5 Maximum Average Power [dBm] (GT - LC = 0.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	22.61	22.41	22.32	21.18	0.1312
10	1	1	QPSK	22.63	22.44	22.32		
10	1	1	16-QAM	21.84	21.50	21.56	20.39	0.1094
Limit	ERP < 7W			Result			Pass	

NR n5 Maximum Average Power [dBm] (GT - LC = 0.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
15	1	1	PI/2 BPSK	22.70	22.48	22.56	21.29	0.1346
15	1	1	QPSK	22.74	22.55	22.57		
15	1	1	16-QAM	21.85	21.70	21.37	20.40	0.1096
Limit	ERP < 7W			Result			Pass	

NR n5 Maximum Average Power [dBm] (GT - LC = 0.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
20	1	1	PI/2 BPSK	22.60	22.56	22.45	21.19	0.1315
20	1	1	QPSK	22.64	22.64	22.54		
20	1	1	16-QAM	21.82	21.77	21.67	20.37	0.1089
Limit	ERP < 7W			Result			Pass	

NR n5 Maximum Average Power [dBm] (GT - LC = 0.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
25	1	1	PI/2 BPSK	-	22.60	-	21.24	0.1330
25	1	1	QPSK	-	22.69	-		
25	1	1	16-QAM	-	21.73	-	20.28	0.1067
Limit	ERP < 7W			Result			Pass	

NR n12 Maximum Average Power [dBm] (GT - LC = 1.72 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
5	1	1	PI/2 BPSK	23.15	22.92	23.28	22.85	0.1928
5	1	1	QPSK	23.09	23.08	23.26		
5	1	1	16-QAM	22.02	22.11	22.38	21.95	0.1567
Limit	ERP < 3W			Result			Pass	

NR n12 Maximum Average Power [dBm] (GT - LC = 1.72 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	22.90	22.94	22.88	22.51	0.1782
10	1	1	QPSK	22.91	22.93	22.90		
10	1	1	16-QAM	22.15	21.89	22.12	21.72	0.1486
Limit	ERP < 3W			Result			Pass	

NR n12 Maximum Average Power [dBm] (GT - LC = 1.72 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
15	1	1	PI/2 BPSK	23.03	22.99	22.98	22.67	0.1849
15	1	1	QPSK	23.10	23.06	23.05		
15	1	1	16-QAM	22.25	22.15	22.12	21.82	0.1521
Limit	ERP < 3W			Result			Pass	

NR n14 Maximum Average Power [dBm] (GT - LC = -0.38 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
5	1	1	PI/2 BPSK	23.31	23.26	23.26	20.87	0.1222
5	1	1	QPSK	23.40	23.31	23.26		
5	1	1	16-QAM	22.52	22.51	22.44	19.99	0.0998
Limit	ERP < 3W			Result			Pass	

NR n14 Maximum Average Power [dBm] (GT - LC = -0.38 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	-	23.13	-	20.67	0.1167
10	1	1	QPSK	-	23.20	-		
10	1	1	16-QAM	-	22.23	-	19.70	0.0933
Limit	ERP < 3W			Result			Pass	

NR n26 Maximum Average Power [dBm] (GT - LC = 0.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
5	1	1	PI/2 BPSK	22.82	22.63	22.60	21.27	0.1340
5	1	1	QPSK	22.77	22.58	22.51		
5	1	1	16-QAM	21.96	21.73	21.71	20.41	0.1099
Limit	ERP < 7W			Result			Pass	

NR n26 Maximum Average Power [dBm] (GT - LC = 0.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	22.60	22.52	22.43	21.11	0.1291
10	1	1	QPSK	22.66	22.51	22.36		
10	1	1	16-QAM	21.79	21.54	21.58	20.24	0.1057
Limit	ERP < 7W			Result			Pass	

NR n26 Maximum Average Power [dBm] (GT - LC = 0.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
15	1	1	PI/2 BPSK	22.77	22.59	22.57	21.22	0.1324
15	1	1	QPSK	22.75	22.65	22.51		
15	1	1	16-QAM	21.88	21.63	21.47	20.33	0.1079
Limit	ERP < 7W			Result			Pass	

NR n26 Maximum Average Power [dBm] (GT - LC = 0.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
20	1	1	PI/2 BPSK	22.70	22.57	22.54	21.16	0.1306
20	1	1	QPSK	22.71	22.61	22.57		
20	1	1	16-QAM	21.84	21.80	21.66	20.29	0.1069
Limit	ERP < 7W			Result			Pass	

Part90s NR n26 Maximum Average Power [dBm] (GT - LC = 0.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP
5	1	1	PI/2 BPSK	22.89	22.95	23.02	21.47	0.1403
5	1	1	QPSK	22.92	22.95	22.95		
5	1	1	16-QAM	22.07	22.11	21.94	20.56	0.1138
Limit	Power < 100W			Result			Pass	

Part90s NR n26 Maximum Average Power [dBm] (GT - LC = 0.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP
10	1	1	PI/2 BPSK	-	22.72	-	21.17	0.1309
10	1	1	QPSK	-	22.72	-		
10	1	1	16-QAM	-	21.90	-	20.35	0.1084
Limit	Power < 100W			Result			Pass	

NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 0.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP
5	1	1	PI/2 BPSK	-	22.89	-	21.34	0.1361
5	1	1	QPSK	-	22.82	-		
5	1	1	16-QAM	-	22.00	-	20.45	0.1109
Limit	Reporting Only			Result			N/A	

NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 0.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP
10	1	1	PI/2 BPSK	-	22.78	-	21.23	0.1327
10	1	1	QPSK	-	22.75	-		
10	1	1	16-QAM	-	21.85	-	20.3	0.1072
Limit	Reporting Only			Result			N/A	

NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 0.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP
15	1	1	PI/2 BPSK	-	22.89	-	21.34	0.1361
15	1	1	QPSK	-	22.85	-		
15	1	1	16-QAM	-	22.04	-	20.49	0.1119
Limit	Reporting Only			Result			N/A	

NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 0.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP
20	1	1	PI/2 BPSK	-	22.80	-	21.25	0.1334
20	1	1	QPSK	-	22.78	-		
20	1	1	16-QAM	-	22.02	-	20.47	0.1114
Limit	Reporting Only			Result			N/A	

NR n71 Maximum Average Power [dBm] (GT - LC = -1.85 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
5	1	1	PI/2 BPSK	22.95	23.16	22.85	19.16	0.0824
5	1	1	QPSK	22.96	23.14	22.92		
5	1	1	16-QAM	22.06	22.25	22.02	18.25	0.0668
Limit	ERP < 3W			Result			Pass	

NR n71 Maximum Average Power [dBm] (GT - LC = -1.85 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	22.83	23.00	22.82	19.00	0.0794
10	1	1	QPSK	22.83	22.98	22.80		
10	1	1	16-QAM	22.01	22.17	21.97	18.17	0.0656
Limit	ERP < 3W			Result			Pass	

NR n71 Maximum Average Power [dBm] (GT - LC = -1.85 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
15	1	1	PI/2 BPSK	22.96	23.12	23.17	19.17	0.0826
15	1	1	QPSK	22.97	23.12	23.07		
15	1	1	16-QAM	22.05	22.29	22.15	18.29	0.0675
Limit	ERP < 3W			Result			Pass	

NR n71 Maximum Average Power [dBm] (GT - LC = -1.85 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
20	1	1	PI/2 BPSK	22.91	23.03	23.14	19.14	0.0820
20	1	1	QPSK	22.90	23.04	23.08		
20	1	1	16-QAM	22.03	22.22	22.23	18.23	0.0665
Limit	ERP < 3W			Result			Pass	

<Antenna 5> <SCS 30kHz>

NR n5 Maximum Average Power [dBm] (GT - LC = 0.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	22.67	22.51	22.36	21.45	0.1396
10	1	1	QPSK	22.90	22.57	22.36		
10	1	1	16-QAM	21.94	21.62	21.55	20.49	0.1119
Limit	ERP < 7W			Result			Pass	

NR n5 Maximum Average Power [dBm] (GT - LC = 0.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
15	1	1	PI/2 BPSK	22.55	22.50	22.42	21.20	0.1318
15	1	1	QPSK	22.65	22.53	22.38		
15	1	1	16-QAM	21.47	21.23	21.35	20.02	0.1005
Limit	ERP < 7W			Result			Pass	

NR n5 Maximum Average Power [dBm] (GT - LC = 0.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
20	1	1	PI/2 BPSK	22.51	22.42	22.35	21.07	0.1279
20	1	1	QPSK	22.52	22.45	22.40		
20	1	1	16-QAM	21.34	21.26	21.23	19.89	0.0975
Limit	ERP < 7W			Result			Pass	

NR n5 Maximum Average Power [dBm] (GT - LC = 0.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
25	1	1	PI/2 BPSK	-	22.46	-	21.13	0.1297
25	1	1	QPSK	-	22.58	-		
25	1	1	16-QAM	-	21.54	-	20.09	0.1021
Limit	ERP < 7W			Result			Pass	

NR n12 Maximum Average Power [dBm] (GT - LC = 1.72 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	23.03	22.94	22.97	22.71	0.1866
10	1	1	QPSK	23.06	23.14	22.97		
10	1	1	16-QAM	21.96	21.99	22.07	21.64	0.1459
Limit	ERP < 3W			Result			Pass	

NR n12 Maximum Average Power [dBm] (GT - LC = 1.72 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
15	1	1	PI/2 BPSK	22.92	22.91	22.93	22.53	0.1791
15	1	1	QPSK	22.96	22.96	22.93		
15	1	1	16-QAM	22.11	21.84	21.79	21.68	0.1472
Limit	ERP < 3W			Result			Pass	

NR n14 Maximum Average Power [dBm] (GT - LC = -0.38 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	-	23.22	-	20.69	0.1172
10	1	1	QPSK	-	23.11	-		
10	1	1	16-QAM	-	22.05	-	19.52	0.0895
Limit	ERP < 3W			Result			Pass	

NR n26 Maximum Average Power [dBm] (GT - LC = 0.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	22.70	22.51	22.44	21.18	0.1312
10	1	1	QPSK	22.73	22.45	22.36		
10	1	1	16-QAM	21.46	21.33	21.27	19.91	0.0979
Limit	ERP < 7W			Result			Pass	

NR n26 Maximum Average Power [dBm] (GT - LC = 0.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
15	1	1	PI/2 BPSK	22.60	22.53	22.51	21.05	0.1274
15	1	1	QPSK	22.58	22.48	22.37		
15	1	1	16-QAM	21.45	21.24	21.32	19.90	0.0977
Limit	ERP < 7W			Result			Pass	

NR n26 Maximum Average Power [dBm] (GT - LC = 0.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
20	1	1	PI/2 BPSK	22.52	22.44	22.46	20.97	0.1250
20	1	1	QPSK	22.51	22.44	22.46		
20	1	1	16-QAM	21.36	21.21	21.56	20.01	0.1002
Limit	ERP < 7W			Result			Pass	

Part90s NR n26 Maximum Average Power [dBm] (GT - LC = 0.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP
10	1	1	PI/2 BPSK	-	22.83	-	21.28	0.1343
10	1	1	QPSK	-	22.81	-		
10	1	1	16-QAM	-	21.63	-	20.08	0.1019
Limit	Power < 100W			Result			Pass	

NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 0.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP
10	1	1	PI/2 BPSK	-	22.88	-	21.33	0.1358
10	1	1	QPSK	-	22.74	-		
10	1	1	16-QAM	-	21.95	-	20.4	0.1096
Limit	Reporting Only			Result			N/A	

NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 0.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP
15	1	1	PI/2 BPSK	-	22.85	-	21.3	0.1349
15	1	1	QPSK	-	22.73	-		
15	1	1	16-QAM	-	22.01	-	20.46	0.1112
Limit	Reporting Only			Result			N/A	

NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 0.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP
20	1	1	PI/2 BPSK	-	22.71	-	21.16	0.1306
20	1	1	QPSK	-	22.66	-		
20	1	1	16-QAM	-	21.87	-	20.32	0.1076
Limit	Reporting Only			Result			N/A	

NR n71 Maximum Average Power [dBm] (GT - LC = -1.85 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	22.98	23.10	22.92	19.10	0.0813
10	1	1	QPSK	22.82	23.00	22.80		
10	1	1	16-QAM	21.91	21.97	21.79	17.97	0.0627
Limit	ERP < 3W			Result			Pass	

NR n71 Maximum Average Power [dBm] (GT - LC = -1.85 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
15	1	1	PI/2 BPSK	22.92	23.03	23.02	19.03	0.0800
15	1	1	QPSK	22.72	22.97	22.85		
15	1	1	16-QAM	21.71	22.12	22.20	18.20	0.0661
Limit	ERP < 3W			Result			Pass	

NR n71 Maximum Average Power [dBm] (GT - LC = -1.85 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
20	1	1	PI/2 BPSK	22.87	22.94	23.02	19.02	0.0798
20	1	1	QPSK	22.74	22.88	22.93		
20	1	1	16-QAM	22.06	22.09	21.87	18.09	0.0644
Limit	ERP < 3W			Result			Pass	

<Antenna 8> <SCS 15kHz>

NR n2 Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	22.22	22.01	22.12	22.51	0.1782
5	1	1	QPSK	22.22	22.01	22.15		
5	1	1	16-QAM	21.37	21.21	21.24	21.66	0.1466
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	22.07	21.91	21.99	22.42	0.1746
10	1	1	QPSK	22.13	21.90	22.01		
10	1	1	16-QAM	21.29	20.86	21.20	21.58	0.1439
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	22.19	21.94	22.04	22.55	0.1799
15	1	1	QPSK	22.26	21.96	22.13		
15	1	1	16-QAM	21.32	21.10	21.33	21.62	0.1452
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	22.16	21.89	22.04	22.51	0.1782
20	1	1	QPSK	22.22	21.90	22.09		
20	1	1	16-QAM	21.30	21.07	21.29	21.59	0.1442
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
25	1	1	PI/2 BPSK	22.15	21.82	22.08	22.49	0.1774
25	1	1	QPSK	22.20	21.85	22.09		
25	1	1	16-QAM	21.22	21.00	21.07	21.51	0.1416
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	22.08	21.75	21.97	22.39	0.1734
30	1	1	QPSK	22.10	21.82	21.94		
30	1	1	16-QAM	21.19	20.88	21.13	21.48	0.1406
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	23.16	22.89	23.02	23.21	0.2094
5	1	1	QPSK	23.28	23.13	23.13		
5	1	1	16-QAM	22.45	22.11	22.03	22.38	0.1730
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	22.99	22.86	22.83	23.07	0.2028
10	1	1	QPSK	23.14	23.01	22.94		
10	1	1	16-QAM	21.94	22.14	22.09	22.07	0.1611
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	23.15	22.98	22.87	23.21	0.2094
15	1	1	QPSK	23.28	23.12	23.02		
15	1	1	16-QAM	22.42	22.04	22.21	22.35	0.1718
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	23.05	22.98	22.79	23.13	0.2056
20	1	1	QPSK	23.20	23.15	22.95		
20	1	1	16-QAM	22.31	22.31	22.02	22.24	0.1675
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
25	1	1	PI/2 BPSK	23.12	23.00	22.82	23.11	0.2046
25	1	1	QPSK	23.18	23.12	22.93		
25	1	1	16-QAM	21.85	22.25	21.56	22.18	0.1652
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	23.06	22.51	22.75	22.99	0.1991
30	1	1	QPSK	22.61	23.05	22.30		
30	1	1	16-QAM	21.74	22.29	22.05	22.22	0.1667
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	22.34	22.33	22.59	22.83	0.1919
40	1	1	QPSK	22.36	22.90	22.68		
40	1	1	16-QAM	21.53	22.00	21.89	21.93	0.1560
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	23.13	22.63	22.51	23.08	0.2032
50	1	1	QPSK	22.72	22.70	23.15		
50	1	1	16-QAM	21.83	22.06	22.35	22.28	0.1690
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 0.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	22.35	22.16	22.26	22.72	0.1871
5	1	1	QPSK	22.36	22.15	22.33		
5	1	1	16-QAM	21.56	21.22	21.53	21.92	0.1556
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 0.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	22.25	22.00	22.17	22.63	0.1832
10	1	1	QPSK	22.27	21.99	22.18		
10	1	1	16-QAM	21.40	21.08	21.23	21.76	0.1500
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 0.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	22.35	22.12	22.29	22.71	0.1866
15	1	1	QPSK	22.31	22.09	22.31		
15	1	1	16-QAM	21.41	21.28	21.46	21.82	0.1521
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 0.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	22.36	22.06	22.20	22.73	0.1875
20	1	1	QPSK	22.37	21.98	22.18		
20	1	1	16-QAM	21.43	21.15	21.35	21.79	0.1510
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 0.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
25	1	1	PI/2 BPSK	22.25	21.97	22.14	22.68	0.1854
25	1	1	QPSK	22.32	22.04	22.13		
25	1	1	16-QAM	21.38	20.94	21.25	21.74	0.1493
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 0.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	22.25	21.94	22.08	22.61	0.1824
30	1	1	QPSK	22.21	21.95	22.04		
30	1	1	16-QAM	21.37	21.04	21.22	21.73	0.1489
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 0.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
35	1	1	PI/2 BPSK	22.02	21.71	21.88	22.38	0.1730
35	1	1	QPSK	21.99	21.79	21.87		
35	1	1	16-QAM	21.10	20.90	20.89	21.46	0.1400
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 0.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	21.96	21.67	21.82	22.33	0.1710
40	1	1	QPSK	21.97	21.70	21.70		
40	1	1	16-QAM	21.11	20.85	20.80	21.47	0.1403
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 0.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
45	1	1	PI/2 BPSK	22.24	22.02	21.92	22.60	0.1820
45	1	1	QPSK	22.18	22.01	21.92		
45	1	1	16-QAM	21.37	21.18	21.07	21.73	0.1489
Limit	EIRP < 2W			Result			Pass	

NR n30 Maximum Average Power [dBm] (GT - LC = -0.34 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	22.38	22.38	22.26	22.18	0.1652
5	1	1	QPSK	22.52	22.43	22.42		
5	1	1	16-QAM	21.40	21.57	21.62	21.28	0.1343
Limit	EIRP < 250 mW/5MHz			Result			Pass	

NR n30 Maximum Average Power [dBm] (GT - LC = -0.34 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	-	22.22	-	21.99	0.1581
10	1	1	QPSK	-	22.33	-		
10	1	1	16-QAM	-	21.47	-	21.13	0.1297
Limit	EIRP < 250 mW/5MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 250 mW/5MHz.

NR n66 Maximum Average Power [dBm] (GT - LC = 1.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	22.93	23.16	22.86	24.63	0.2904
5	1	1	QPSK	22.98	23.27	22.97		
5	1	1	16-QAM	22.09	22.41	22.11	23.77	0.2382
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = 1.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	22.79	22.98	22.73	24.44	0.2780
10	1	1	QPSK	22.87	23.08	22.79		
10	1	1	16-QAM	21.87	22.22	21.94	23.58	0.2280
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = 1.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	22.88	23.08	22.83	24.58	0.2871
15	1	1	QPSK	22.97	23.22	22.89		
15	1	1	16-QAM	22.10	22.26	22.04	23.62	0.2301
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = 1.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	22.85	22.99	22.80	24.48	0.2805
20	1	1	QPSK	22.93	23.12	22.92		
20	1	1	16-QAM	22.04	22.18	22.01	23.54	0.2259
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = 1.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
25	1	1	PI/2 BPSK	22.87	22.97	22.86	24.50	0.2818
25	1	1	QPSK	22.88	23.14	22.98		
25	1	1	16-QAM	21.97	22.20	22.02	23.56	0.2270
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = 1.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	22.78	22.86	22.89	24.30	0.2692
30	1	1	QPSK	22.82	22.94	22.93		
30	1	1	16-QAM	21.89	22.12	22.04	23.48	0.2228
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = 1.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
35	1	1	PI/2 BPSK	22.61	22.73	22.76	24.19	0.2624
35	1	1	QPSK	22.63	22.77	22.83		
35	1	1	16-QAM	21.71	21.92	21.90	23.28	0.2128
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = 1.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	22.52	22.61	22.68	24.04	0.2535
40	1	1	QPSK	22.55	22.61	22.66		
40	1	1	16-QAM	21.68	21.63	21.82	23.18	0.2080
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = 1.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
45	1	1	PI/2 BPSK	22.79	22.85	22.96	24.41	0.2761
45	1	1	QPSK	22.85	22.92	23.05		
45	1	1	16-QAM	21.98	22.05	22.17	23.53	0.2254
Limit	EIRP < 1W			Result			Pass	

<Antenna 8> <SCS 30kHz>

NR n2 Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	22.27	21.95	22.16	22.56	0.1803
10	1	1	QPSK	22.21	21.88	22.14		
10	1	1	16-QAM	21.07	20.91	21.35	21.64	0.1459
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	22.16	21.92	22.02	22.46	0.1762
15	1	1	QPSK	22.17	21.86	22.08		
15	1	1	16-QAM	21.31	21.11	21.10	21.60	0.1445
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	22.12	21.79	21.94	22.41	0.1742
20	1	1	QPSK	22.08	21.76	21.93		
20	1	1	16-QAM	21.05	20.67	20.89	21.34	0.1361
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
25	1	1	PI/2 BPSK	22.11	21.77	21.92	22.40	0.1738
25	1	1	QPSK	22.03	21.70	21.94		
25	1	1	16-QAM	20.94	20.94	21.03	21.32	0.1355
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	22.07	21.73	21.92	22.36	0.1722
30	1	1	QPSK	22.03	21.77	21.87		
30	1	1	16-QAM	21.20	20.80	21.05	21.49	0.1409
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	23.21	22.91	23.01	23.14	0.2061
10	1	1	QPSK	23.16	22.88	22.90		
10	1	1	16-QAM	22.36	22.05	21.97	22.29	0.1694
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	23.15	22.91	22.86	23.11	0.2046
15	1	1	QPSK	23.18	22.90	22.87		
15	1	1	16-QAM	22.10	21.92	21.90	22.03	0.1596
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	23.12	22.88	22.73	23.05	0.2018
20	1	1	QPSK	23.09	22.96	22.70		
20	1	1	16-QAM	22.29	22.11	21.73	22.22	0.1667
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
25	1	1	PI/2 BPSK	23.06	22.80	22.66	22.99	0.1991
25	1	1	QPSK	23.05	22.98	22.74		
25	1	1	16-QAM	21.95	21.80	21.83	21.88	0.1542
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	22.53	22.35	22.16	22.52	0.1786
30	1	1	QPSK	22.59	22.57	22.26		
30	1	1	16-QAM	21.69	21.98	21.64	21.91	0.1552
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	22.28	22.20	22.07	22.74	0.1879
40	1	1	QPSK	22.24	22.81	22.16		
40	1	1	16-QAM	21.16	21.68	21.60	21.61	0.1449
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	22.56	22.53	22.45	22.55	0.1799
50	1	1	QPSK	22.62	22.59	22.59		
50	1	1	16-QAM	21.64	21.55	21.37	21.57	0.1435
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 0.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	22.35	22.10	22.27	22.71	0.1866
10	1	1	QPSK	22.32	22.00	22.23		
10	1	1	16-QAM	21.28	21.01	21.38	21.74	0.1493
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 0.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	22.30	22.06	22.24	22.66	0.1845
15	1	1	QPSK	22.26	21.96	22.16		
15	1	1	16-QAM	21.47	21.22	21.12	21.83	0.1524
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 0.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	22.32	21.95	22.15	22.68	0.1854
20	1	1	QPSK	22.19	21.81	22.07		
20	1	1	16-QAM	21.11	20.77	21.24	21.60	0.1445
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 0.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
25	1	1	PI/2 BPSK	22.17	21.86	22.03	22.53	0.1791
25	1	1	QPSK	22.17	21.80	22.04		
25	1	1	16-QAM	21.25	20.99	20.89	21.61	0.1449
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 0.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	22.17	21.84	22.02	22.53	0.1791
30	1	1	QPSK	22.12	21.86	21.95		
30	1	1	16-QAM	21.07	20.74	20.87	21.43	0.1390
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 0.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
35	1	1	PI/2 BPSK	21.99	21.67	21.86	22.35	0.1718
35	1	1	QPSK	21.96	21.70	21.75		
35	1	1	16-QAM	21.16	20.83	21.01	21.52	0.1419
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 0.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	21.96	21.62	21.75	22.32	0.1706
40	1	1	QPSK	21.87	21.62	21.61		
40	1	1	16-QAM	20.82	20.58	20.54	21.18	0.1312
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 0.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
45	1	1	PI/2 BPSK	22.15	21.85	21.83	22.51	0.1782
45	1	1	QPSK	22.08	21.95	21.80		
45	1	1	16-QAM	21.34	21.02	21.01	21.70	0.1479
Limit	EIRP < 2W			Result			Pass	

NR n30 Maximum Average Power [dBm] (GT - LC = -0.34 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	-	22.45	-	22.11	0.1626
10	1	1	QPSK	-	22.31	-		
10	1	1	16-QAM	-	21.20	-	20.86	0.1219
Limit	EIRP < 250 mW/5MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 250 mW/5MHz.

NR n66 Maximum Average Power [dBm] (GT - LC = 1.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	22.88	23.00	22.79	24.46	0.2793
10	1	1	QPSK	22.89	23.10	22.89		
10	1	1	16-QAM	21.81	21.99	21.85	23.35	0.2163
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = 1.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	22.87	23.04	22.76	24.71	0.2958
15	1	1	QPSK	22.90	23.35	22.87		
15	1	1	16-QAM	21.97	22.19	22.09	23.55	0.2265
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = 1.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	22.81	22.92	22.78	24.28	0.2679
20	1	1	QPSK	22.77	22.88	22.80		
20	1	1	16-QAM	21.68	21.90	21.68	23.26	0.2118
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = 1.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
25	1	1	PI/2 BPSK	22.76	22.93	22.83	24.41	0.2761
25	1	1	QPSK	22.73	23.05	22.86		
25	1	1	16-QAM	21.86	21.96	21.95	23.32	0.2148
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = 1.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	22.76	22.88	22.83	24.29	0.2685
30	1	1	QPSK	22.75	22.93	22.92		
30	1	1	16-QAM	21.88	21.78	21.86	23.24	0.2109
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = 1.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
35	1	1	PI/2 BPSK	22.60	22.73	22.80	24.24	0.2655
35	1	1	QPSK	22.51	22.77	22.88		
35	1	1	16-QAM	21.53	21.86	21.88	23.24	0.2109
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = 1.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	22.54	22.59	22.73	24.11	0.2576
40	1	1	QPSK	22.48	22.75	22.71		
40	1	1	16-QAM	21.69	21.71	21.53	23.07	0.2028
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = 1.36 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
45	1	1	PI/2 BPSK	22.75	22.79	22.86	24.32	0.2704
45	1	1	QPSK	22.70	22.85	22.96		
45	1	1	16-QAM	21.64	21.73	21.98	23.34	0.2158
Limit	EIRP < 1W			Result			Pass	

<Antenna 8> <SCS 15kHz>

NR n38 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	21.84	21.82	22.08	22.87	0.1936
5	1	1	QPSK	22.94	22.73	21.92		
5	1	1	16-QAM	21.13	21.78	21.90	21.83	0.1524
Limit	EIRP < 2W			Result			Pass	

NR n38 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	21.88	21.73	21.47	22.47	0.1766
10	1	1	QPSK	21.83	21.93	22.54		
10	1	1	16-QAM	20.89	21.06	20.89	20.99	0.1256
Limit	EIRP < 2W			Result			Pass	

NR n38 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	22.02	22.05	21.76	22.82	0.1914
15	1	1	QPSK	22.89	22.71	21.61		
15	1	1	16-QAM	21.35	20.86	20.87	21.28	0.1343
Limit	EIRP < 2W			Result			Pass	

NR n38 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	21.91	22.04	21.66	22.75	0.1884
20	1	1	QPSK	22.82	22.74	21.77		
20	1	1	16-QAM	21.23	20.87	21.47	21.40	0.1380
Limit	EIRP < 2W			Result			Pass	

NR n38 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
25	1	1	PI/2 BPSK	22.74	22.77	21.70	22.79	0.1901
25	1	1	QPSK	22.86	21.79	21.89		
25	1	1	16-QAM	20.85	21.11	20.98	21.04	0.1271
Limit	EIRP < 2W			Result			Pass	

NR n38 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	21.72	22.68	21.73	22.70	0.1862
30	1	1	QPSK	22.77	22.72	21.56		
30	1	1	16-QAM	21.31	20.85	20.70	21.24	0.1330
Limit	EIRP < 2W			Result			Pass	

NR n38 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	21.47	22.50	22.40	22.43	0.1750
40	1	1	QPSK	22.49	22.50	22.40		
40	1	1	16-QAM	21.58	21.62	21.41	21.55	0.1429
Limit	EIRP < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.39 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	26.05	25.79	25.75	25.77	0.3776
10	1	1	QPSK	26.16	25.80	25.81		
10	1	1	16-QAM	25.15	24.83	24.85	24.76	0.2992
Limit	EIRP < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.39 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	26.20	25.96	25.79	26.01	0.3990
15	1	1	QPSK	26.40	26.03	25.85		
15	1	1	16-QAM	25.36	24.98	24.89	24.97	0.3141
Limit	EIRP < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.39 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	26.16	25.95	25.78	25.88	0.3873
20	1	1	QPSK	26.27	26.01	25.82		
20	1	1	16-QAM	25.36	24.97	24.88	24.97	0.3141
Limit	EIRP < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.39 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	25.99	25.89	25.46	25.78	0.3784
30	1	1	QPSK	26.17	25.96	25.56		
30	1	1	16-QAM	25.25	24.96	24.57	24.86	0.3062
Limit	EIRP < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.39 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	25.76	25.67	25.16	25.42	0.3483
40	1	1	QPSK	25.81	25.74	25.21		
40	1	1	16-QAM	24.97	24.70	24.24	24.58	0.2871
Limit	EIRP < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.39 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	26.09	25.91	25.56	25.85	0.3846
50	1	1	QPSK	26.24	25.95	25.56		
50	1	1	16-QAM	25.27	25.12	24.55	24.88	0.3076
Limit	EIRP < 2W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	25.88	25.67	25.50	25.22	0.3327
10	1	1	QPSK	25.89	25.76	25.58		
10	1	1	16-QAM	24.95	24.71	24.60	24.28	0.2679
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	25.93	25.76	25.52	25.32	0.3404
15	1	1	QPSK	25.99	25.74	25.51		
15	1	1	16-QAM	24.90	24.77	24.50	24.23	0.2649
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	25.91	25.75	25.44	25.25	0.3350
20	1	1	QPSK	25.92	25.77	25.62		
20	1	1	16-QAM	24.80	24.74	24.56	24.13	0.2588
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	25.80	25.66	25.32	25.17	0.3289
30	1	1	QPSK	25.84	25.68	25.34		
30	1	1	16-QAM	24.78	24.65	24.47	24.11	0.2576
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	25.46	25.37	25.07	24.86	0.3062
40	1	1	QPSK	25.53	25.35	25.11		
40	1	1	16-QAM	24.47	24.32	24.05	23.80	0.2399
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	25.86	25.68	25.47	25.24	0.3342
50	1	1	QPSK	25.91	25.73	25.48		
50	1	1	16-QAM	24.82	24.79	24.52	24.15	0.2600
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	25.46	25.47	25.60	23.91	0.2460
10	1	1	QPSK	25.46	25.45	25.60		
10	1	1	16-QAM	24.47	24.53	24.68	22.99	0.1991
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	25.52	25.61	25.66	24.00	0.2512
15	1	1	QPSK	25.54	25.58	25.69		
15	1	1	16-QAM	24.49	24.63	24.73	23.04	0.2014
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	25.47	25.51	25.62	23.98	0.2500
20	1	1	QPSK	25.58	25.55	25.67		
20	1	1	16-QAM	24.53	24.62	24.66	22.97	0.1982
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	25.37	25.41	25.38	23.80	0.2399
30	1	1	QPSK	25.38	25.49	25.45		
30	1	1	16-QAM	24.53	24.47	24.43	22.84	0.1923
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	25.08	25.12	25.10	23.48	0.2228
40	1	1	QPSK	25.09	25.13	25.17		
40	1	1	16-QAM	24.11	24.16	24.15	22.47	0.1766
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	25.48	25.49	25.45	23.86	0.2432
50	1	1	QPSK	25.44	25.55	25.49		
50	1	1	16-QAM	24.55	24.54	24.42	22.86	0.1932
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	25.88	26.01	25.24	25.37	0.3443
10	1	1	QPSK	25.98	26.04	25.23		
10	1	1	16-QAM	24.97	25.05	25.07	24.40	0.2754
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	26.02	26.11	25.81	25.58	0.3614
15	1	1	QPSK	26.13	26.25	25.79		
15	1	1	16-QAM	25.15	25.17	25.16	24.50	0.2818
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	26.03	26.12	25.86	25.45	0.3508
20	1	1	QPSK	26.09	26.11	25.87		
20	1	1	16-QAM	25.13	25.17	25.16	24.50	0.2818
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	25.99	26.09	25.92	25.42	0.3483
30	1	1	QPSK	26.02	26.09	25.89		
30	1	1	16-QAM	25.10	25.13	24.92	24.46	0.2793
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	25.71	25.81	25.66	25.19	0.3304
40	1	1	QPSK	25.71	25.86	25.66		
40	1	1	16-QAM	24.66	24.82	24.56	24.15	0.2600
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	26.09	26.14	26.09	25.52	0.3565
50	1	1	QPSK	26.13	26.19	26.09		
50	1	1	16-QAM	25.11	25.12	25.07	24.45	0.2786
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	25.74	25.75	25.72	24.13	0.2588
10	1	1	QPSK	25.79	25.82	25.75		
10	1	1	16-QAM	24.74	24.76	24.69	23.07	0.2028
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	25.86	25.85	25.77	24.29	0.2685
15	1	1	QPSK	25.94	25.98	25.77		
15	1	1	16-QAM	24.94	24.96	24.79	23.27	0.2123
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	25.91	25.95	25.75	24.26	0.2667
20	1	1	QPSK	25.87	25.93	25.80		
20	1	1	16-QAM	24.94	24.93	24.76	23.25	0.2113
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	25.73	25.79	25.65	24.17	0.2612
30	1	1	QPSK	25.70	25.86	25.69		
30	1	1	16-QAM	24.77	24.88	24.68	23.19	0.2084
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	25.45	25.52	25.33	23.88	0.2443
40	1	1	QPSK	25.53	25.57	25.45		
40	1	1	16-QAM	24.55	24.59	24.45	22.90	0.1950
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	25.88	25.87	25.83	24.24	0.2655
50	1	1	QPSK	25.89	25.93	25.87		
50	1	1	16-QAM	24.97	24.95	24.88	23.28	0.2128
Limit	EIRP < 1W			Result			Pass	

<Antenna 8> <SCS 30kHz>

NR n38 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	22.95	22.76	22.67	22.95	0.1972
10	1	1	QPSK	23.02	22.75	22.69		
10	1	1	16-QAM	22.01	21.80	21.73	21.94	0.1563
Limit	EIRP < 2W			Result			Pass	

NR n38 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	22.90	22.77	22.59	22.88	0.1941
15	1	1	QPSK	22.95	22.81	22.64		
15	1	1	16-QAM	21.97	21.78	21.59	21.90	0.1549
Limit	EIRP < 2W			Result			Pass	

NR n38 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	22.86	22.78	22.55	22.87	0.1936
20	1	1	QPSK	22.94	22.82	22.69		
20	1	1	16-QAM	21.93	21.82	21.65	21.86	0.1535
Limit	EIRP < 2W			Result			Pass	

NR n38 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
25	1	1	PI/2 BPSK	22.85	22.75	22.58	22.83	0.1919
25	1	1	QPSK	22.90	22.77	22.61		
25	1	1	16-QAM	21.89	21.81	21.63	21.82	0.1521
Limit	EIRP < 2W			Result			Pass	

NR n38 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	22.82	22.72	22.57	22.81	0.1910
30	1	1	QPSK	22.88	22.76	22.72		
30	1	1	16-QAM	21.92	21.82	21.63	21.85	0.1531
Limit	EIRP < 2W			Result			Pass	

NR n38 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	22.57	22.60	22.51	22.58	0.1811
40	1	1	QPSK	22.65	22.61	22.53		
40	1	1	16-QAM	21.64	21.68	21.55	21.61	0.1449
Limit	EIRP < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.39 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	26.27	25.89	25.87	26.01	0.3990
10	1	1	QPSK	26.40	25.90	25.89		
10	1	1	16-QAM	25.34	24.95	24.93	24.95	0.3126
Limit	EIRP < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.39 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	26.26	25.91	25.79	25.97	0.3954
15	1	1	QPSK	26.36	25.98	25.86		
15	1	1	16-QAM	25.35	24.98	24.78	24.96	0.3133
Limit	EIRP < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.39 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	26.22	25.91	25.76	25.95	0.3936
20	1	1	QPSK	26.34	26.04	25.84		
20	1	1	16-QAM	25.25	24.88	24.75	24.86	0.3062
Limit	EIRP < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.39 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	26.12	25.97	25.57	25.80	0.3802
30	1	1	QPSK	26.19	25.99	25.57		
30	1	1	16-QAM	25.18	25.03	24.66	24.79	0.3013
Limit	EIRP < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.39 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	25.91	25.73	25.33	25.59	0.3622
40	1	1	QPSK	25.98	25.77	25.29		
40	1	1	16-QAM	24.98	24.79	24.39	24.59	0.2877
Limit	EIRP < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.39 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	26.11	25.99	25.68	25.89	0.3882
50	1	1	QPSK	26.28	26.01	25.62		
50	1	1	16-QAM	25.20	25.03	24.72	24.81	0.3027
Limit	EIRP < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.39 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
60	1	1	PI/2 BPSK	26.12	25.96	25.81	25.85	0.3846
60	1	1	QPSK	26.24	25.98	25.75		
60	1	1	16-QAM	25.21	25.00	24.90	24.82	0.3034
Limit	EIRP < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.39 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
70	1	1	PI/2 BPSK	25.98	25.79	25.79	25.98	0.3963
70	1	1	QPSK	26.37	25.92	25.65		
70	1	1	16-QAM	25.13	24.87	24.80	24.74	0.2979
Limit	EIRP < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.39 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
80	1	1	PI/2 BPSK	26.05	25.66	25.72	25.96	0.3945
80	1	1	QPSK	26.35	25.72	25.60		
80	1	1	16-QAM	25.14	24.71	24.74	24.75	0.2985
Limit	EIRP < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.39 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
90	1	1	PI/2 BPSK	25.98	25.63	25.40	25.80	0.3802
90	1	1	QPSK	26.19	25.76	25.51		
90	1	1	16-QAM	25.12	24.56	24.35	24.73	0.2972
Limit	EIRP < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.39 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
100	1	1	PI/2 BPSK	25.87	25.53	25.34	25.84	0.3837
100	1	1	QPSK	26.23	25.64	25.38		
100	1	1	16-QAM	25.10	24.63	24.37	24.71	0.2958
Limit	EIRP < 2W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	26.04	25.83	25.69	25.47	0.3524
10	1	1	QPSK	26.14	25.87	25.70		
10	1	1	16-QAM	25.14	24.88	24.73	24.47	0.2799
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	25.99	25.79	25.54	25.34	0.3420
15	1	1	QPSK	26.01	25.86	25.57		
15	1	1	16-QAM	25.04	24.85	24.58	24.37	0.2735
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	25.89	25.71	25.45	25.32	0.3404
20	1	1	QPSK	25.99	25.79	25.60		
20	1	1	16-QAM	24.84	24.69	24.47	24.17	0.2612
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	25.88	25.62	25.31	25.33	0.3412
30	1	1	QPSK	26.00	25.71	25.41		
30	1	1	16-QAM	24.79	24.67	24.32	24.12	0.2582
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	25.53	25.37	25.12	24.93	0.3112
40	1	1	QPSK	25.60	25.48	25.17		
40	1	1	16-QAM	24.49	24.35	24.17	23.82	0.2410
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	25.80	25.67	25.36	25.14	0.3266
50	1	1	QPSK	25.81	25.68	25.42		
50	1	1	16-QAM	24.88	24.73	24.37	24.21	0.2636
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
60	1	1	PI/2 BPSK	25.74	25.66	25.38	25.13	0.3258
60	1	1	QPSK	25.80	25.65	25.40		
60	1	1	16-QAM	24.79	24.59	24.37	24.12	0.2582
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
70	1	1	PI/2 BPSK	25.49	25.46	25.22	24.88	0.3076
70	1	1	QPSK	25.55	25.53	25.31		
70	1	1	16-QAM	24.55	24.54	24.27	23.88	0.2443
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
80	1	1	PI/2 BPSK	25.46	25.44	25.18	24.82	0.3034
80	1	1	QPSK	25.48	25.49	25.25		
80	1	1	16-QAM	24.50	24.44	24.26	23.83	0.2415
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
90	1	1	PI/2 BPSK	25.38	25.37	25.14	24.77	0.2999
90	1	1	QPSK	25.44	25.42	25.16		
90	1	1	16-QAM	24.44	24.42	24.18	23.77	0.2382
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
100	1	1	PI/2 BPSK	25.21	25.23	24.99	24.57	0.2864
100	1	1	QPSK	25.24	25.24	25.04		
100	1	1	16-QAM	24.26	24.29	24.03	23.62	0.2301
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	25.50	25.58	25.70	24.08	0.2559
10	1	1	QPSK	25.61	25.74	25.77		
10	1	1	16-QAM	24.49	24.53	24.75	23.06	0.2023
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	25.46	25.53	25.55	23.97	0.2495
15	1	1	QPSK	25.50	25.59	25.66		
15	1	1	16-QAM	24.48	24.61	24.58	22.92	0.1959
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	25.37	25.45	25.55	23.89	0.2449
20	1	1	QPSK	25.50	25.53	25.58		
20	1	1	16-QAM	24.44	24.52	24.64	22.95	0.1972
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	25.38	25.45	25.38	23.78	0.2388
30	1	1	QPSK	25.42	25.47	25.44		
30	1	1	16-QAM	24.45	24.47	24.48	22.79	0.1901
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	25.08	25.19	25.12	23.52	0.2249
40	1	1	QPSK	25.14	25.21	25.20		
40	1	1	16-QAM	24.13	24.18	24.28	22.59	0.1816
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	25.36	25.44	25.34	23.80	0.2399
50	1	1	QPSK	25.42	25.49	25.42		
50	1	1	16-QAM	24.42	24.54	24.36	22.85	0.1928
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
60	1	1	PI/2 BPSK	25.29	25.38	25.33	23.71	0.2350
60	1	1	QPSK	25.33	25.40	25.39		
60	1	1	16-QAM	24.31	24.47	24.39	22.78	0.1897
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
70	1	1	PI/2 BPSK	25.10	25.11	25.18	23.59	0.2286
70	1	1	QPSK	25.21	25.28	25.26		
70	1	1	16-QAM	24.19	24.19	24.30	22.61	0.1824
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
80	1	1	PI/2 BPSK	25.11	25.14	25.18	23.62	0.2301
80	1	1	QPSK	25.19	25.27	25.31		
80	1	1	16-QAM	24.08	24.10	24.07	22.41	0.1742
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
90	1	1	PI/2 BPSK	25.04	25.01	25.03	23.46	0.2218
90	1	1	QPSK	25.15	25.12	25.08		
90	1	1	16-QAM	23.91	23.92	24.08	22.39	0.1734
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
100	1	1	PI/2 BPSK	-	24.87	-	23.22	0.2099
100	1	1	QPSK	-	24.91	-		
100	1	1	16-QAM	-	23.82	-	22.13	0.1633
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	26.03	26.08	25.58	25.53	0.3573
10	1	1	QPSK	26.08	26.20	25.57		
10	1	1	16-QAM	25.10	25.16	25.10	24.49	0.2812
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	26.02	26.06	26.00	25.46	0.3516
15	1	1	QPSK	26.13	26.13	25.98		
15	1	1	16-QAM	24.98	25.08	24.98	24.41	0.2761
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	25.98	25.99	25.97	25.43	0.3491
20	1	1	QPSK	26.10	26.09	26.00		
20	1	1	16-QAM	24.95	24.98	24.88	24.31	0.2698
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	25.94	26.08	25.88	25.44	0.3499
30	1	1	QPSK	26.01	26.11	25.95		
30	1	1	16-QAM	25.04	25.16	24.97	24.49	0.2812
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	25.70	25.82	25.63	25.23	0.3334
40	1	1	QPSK	25.77	25.90	25.66		
40	1	1	16-QAM	24.80	24.89	24.77	24.22	0.2642
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	26.02	26.09	26.06	25.47	0.3524
50	1	1	QPSK	26.10	26.14	26.08		
50	1	1	16-QAM	25.13	25.19	25.12	24.52	0.2831
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
60	1	1	PI/2 BPSK	26.03	26.01	26.10	25.43	0.3491
60	1	1	QPSK	26.09	26.08	26.10		
60	1	1	16-QAM	25.11	25.00	25.20	24.53	0.2838
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
70	1	1	PI/2 BPSK	25.81	25.76	25.93	25.34	0.3420
70	1	1	QPSK	25.87	25.86	26.01		
70	1	1	16-QAM	24.90	24.82	24.97	24.30	0.2692
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
80	1	1	PI/2 BPSK	25.86	25.77	25.87	25.25	0.3350
80	1	1	QPSK	25.92	25.80	25.91		
80	1	1	16-QAM	24.90	24.85	24.94	24.27	0.2673
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
90	1	1	PI/2 BPSK	25.79	25.71	25.74	25.14	0.3266
90	1	1	QPSK	25.81	25.77	25.79		
90	1	1	16-QAM	24.83	24.77	24.64	24.16	0.2606
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.67 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
100	1	1	PI/2 BPSK	-	25.60	-	25.00	0.3162
100	1	1	QPSK	-	25.67	-		
100	1	1	16-QAM	-	24.53	-	23.86	0.2432
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	25.82	25.82	25.72	24.20	0.2630
10	1	1	QPSK	25.87	25.89	25.77		
10	1	1	16-QAM	24.91	24.92	24.76	23.23	0.2104
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	25.84	25.85	25.73	24.25	0.2661
15	1	1	QPSK	25.94	25.87	25.80		
15	1	1	16-QAM	24.89	24.93	24.69	23.24	0.2109
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	25.75	25.75	25.63	24.17	0.2612
20	1	1	QPSK	25.86	25.82	25.76		
20	1	1	16-QAM	24.84	24.87	24.75	23.18	0.2080
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	25.74	25.78	25.61	24.14	0.2594
30	1	1	QPSK	25.74	25.83	25.67		
30	1	1	16-QAM	24.79	24.90	24.71	23.21	0.2094
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	25.50	25.59	25.40	23.90	0.2455
40	1	1	QPSK	25.56	25.59	25.43		
40	1	1	16-QAM	24.57	24.62	24.39	22.93	0.1963
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
45	1	1	PI/2 BPSK	25.76	25.81	25.70	24.23	0.2649
45	1	1	QPSK	25.90	25.92	25.80		
45	1	1	16-QAM	24.75	24.74	24.67	23.06	0.2023
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	25.80	25.81	25.77	24.22	0.2642
50	1	1	QPSK	25.88	25.91	25.83		
50	1	1	16-QAM	24.77	24.84	24.87	23.18	0.2080
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
60	1	1	PI/2 BPSK	25.81	25.78	25.85	24.26	0.2667
60	1	1	QPSK	25.84	25.81	25.95		
60	1	1	16-QAM	24.88	24.87	24.87	23.19	0.2084
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
70	1	1	PI/2 BPSK	25.64	25.58	25.72	24.11	0.2576
70	1	1	QPSK	25.73	25.67	25.80		
70	1	1	16-QAM	24.71	24.70	24.76	23.07	0.2028
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
80	1	1	PI/2 BPSK	25.68	25.57	25.64	24.05	0.2541
80	1	1	QPSK	25.74	25.63	25.71		
80	1	1	16-QAM	24.76	24.66	24.72	23.07	0.2028
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
90	1	1	PI/2 BPSK	25.60	25.54	25.57	23.94	0.2477
90	1	1	QPSK	25.63	25.56	25.58		
90	1	1	16-QAM	24.62	24.56	24.56	22.93	0.1963
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = -1.69 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
100	1	1	PI/2 BPSK	-	25.44	-	23.79	0.2393
100	1	1	QPSK	-	25.48	-		
100	1	1	16-QAM	-	24.45	-	22.76	0.1888
Limit	EIRP < 1W			Result			Pass	

<Antenna 5> <SCS 15kHz>

NR n2 Maximum Average Power [dBm] (GT - LC = 1.33 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	22.88	22.26	22.74	24.21	0.2636
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = 1.33 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	22.82	22.09	22.63	24.15	0.2600
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = 1.33 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	22.95	22.26	22.60	24.28	0.2679
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = 1.33 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	22.86	22.31	22.53	24.19	0.2624
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = 1.33 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
25	1	1	PI/2 BPSK	22.82	22.35	22.38	24.15	0.2600
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = 1.33 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	22.86	22.45	22.22	24.19	0.2624
30	1	1	QPSK	22.75	22.42	22.18		
30	1	1	16-QAM	21.94	21.53	21.41	23.27	0.2123
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 1.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	23.05	22.49	22.96	24.14	0.2594
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 1.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	23.00	22.29	22.83	24.09	0.2564
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 1.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	23.15	22.42	22.90	24.24	0.2655
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 1.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	23.06	22.45	22.80	24.15	0.2600
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 1.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
25	1	1	PI/2 BPSK	23.10	22.47	22.88	24.19	0.2624
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 1.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	23.15	22.51	22.93	24.24	0.2655
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 1.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
35	1	1	PI/2 BPSK	23.11	22.42	22.92	24.20	0.2630
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 1.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	22.97	22.54	22.79	24.06	0.2547
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 1.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
45	1	1	PI/2 BPSK	23.05	22.51	22.82	24.14	0.2594
45	1	1	QPSK	22.99	22.49	22.79		
45	1	1	16-QAM	22.42	21.69	22.15	23.51	0.2244
Limit	EIRP < 2W			Result			Pass	

<Antenna 5> <SCS 30kHz>

NR n2 Maximum Average Power [dBm] (GT - LC = 1.33 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	23.34	22.72	23.12	24.67	0.2931
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = 1.33 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	23.31	22.67	22.99	24.64	0.2911
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = 1.33 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	23.22	22.71	22.94	24.55	0.2851
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = 1.33 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
25	1	1	PI/2 BPSK	23.20	22.77	22.82	24.53	0.2838
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = 1.33 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	23.21	22.84	22.65	24.54	0.2844
30	1	1	QPSK	23.16	22.82	22.65		
30	1	1	16-QAM	22.46	22.12	21.88	23.79	0.2393
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 1.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	23.05	22.42	22.82	24.14	0.2594
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 1.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	22.99	22.36	22.80	24.08	0.2559
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 1.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	22.96	22.35	22.73	24.05	0.2541
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 1.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
25	1	1	PI/2 BPSK	22.87	22.33	22.56	23.96	0.2489
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 1.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	22.91	22.44	22.48	24.00	0.2512
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 1.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
35	1	1	PI/2 BPSK	22.73	22.36	22.22	23.82	0.2410
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 1.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	22.66	22.34	22.18	23.75	0.2371
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 1.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
45	1	1	PI/2 BPSK	22.81	22.70	22.28	23.90	0.2455
45	1	1	QPSK	22.75	22.57	22.25		
45	1	1	16-QAM	22.11	22.00	21.62	23.20	0.2089
Limit	EIRP < 2W			Result			Pass	

<Antenna 5> <SCS 30kHz>

NR n41 PC3 Maximum Average Power [dBm] (GT - LC = -0.47 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	22.62	22.78	22.89	22.42	0.1746
Limit	EIRP < 2W			Result			Pass	

NR n41 PC3 Maximum Average Power [dBm] (GT - LC = -0.47 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	22.53	22.75	22.83	22.36	0.1722
Limit	EIRP < 2W			Result			Pass	

NR n41 PC3 Maximum Average Power [dBm] (GT - LC = -0.47 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	22.59	22.87	22.86	22.40	0.1738
Limit	EIRP < 2W			Result			Pass	

NR n41 PC3 Maximum Average Power [dBm] (GT - LC = -0.47 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	22.56	22.80	22.79	22.33	0.1710
Limit	EIRP < 2W			Result			Pass	

NR n41 PC3 Maximum Average Power [dBm] (GT - LC = -0.47 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	22.64	22.79	22.87	22.40	0.1738
Limit	EIRP < 2W			Result			Pass	

NR n41 PC3 Maximum Average Power [dBm] (GT - LC = -0.47 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	22.55	22.86	22.83	22.39	0.1734
Limit	EIRP < 2W			Result			Pass	

NR n41 PC3 Maximum Average Power [dBm] (GT - LC = -0.47 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
60	1	1	PI/2 BPSK	22.53	22.83	22.83	22.36	0.1722
Limit	EIRP < 2W			Result			Pass	

NR n41 PC3 Maximum Average Power [dBm] (GT - LC = -0.47 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
70	1	1	PI/2 BPSK	22.57	22.85	22.80	22.38	0.1730
Limit	EIRP < 2W			Result			Pass	

NR n41 PC3 Maximum Average Power [dBm] (GT - LC = -0.47 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
80	1	1	PI/2 BPSK	22.61	22.85	22.91	22.44	0.1754
Limit	EIRP < 2W			Result			Pass	

NR n41 PC3 Maximum Average Power [dBm] (GT - LC = -0.47 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
90	1	1	PI/2 BPSK	22.63	22.87	22.87	22.40	0.1738
Limit	EIRP < 2W			Result			Pass	

NR n41 PC3 Maximum Average Power [dBm] (GT - LC = -0.47 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
100	1	1	PI/2 BPSK	22.65	22.89	22.93	22.46	0.1762
100	1	1	QPSK	22.44	22.79	22.79		
100	1	1	16-QAM	21.53	21.79	21.69	21.32	0.1355
Limit	EIRP < 2W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.28 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	25.44	25.14	24.92	25.16	0.3281
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.28 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	25.49	25.10	24.98	25.21	0.3319
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.28 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	25.40	25.12	25.00	25.12	0.3251
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.28 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	25.41	25.08	25.02	25.13	0.3258
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.28 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	25.40	25.11	25.02	25.12	0.3251
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.28 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	25.44	25.10	25.01	25.16	0.3281
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.28 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
60	1	1	PI/2 BPSK	25.31	25.02	24.98	25.03	0.3184
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.28 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
70	1	1	PI/2 BPSK	25.20	25.05	24.97	24.92	0.3105
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.28 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
80	1	1	PI/2 BPSK	25.22	25.15	25.08	24.94	0.3119
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.28 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
90	1	1	PI/2 BPSK	25.20	25.15	25.11	24.92	0.3105
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.28 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
100	1	1	PI/2 BPSK	25.22	25.13	25.15	24.94	0.3119
100	1	1	QPSK	25.09	25.21	25.08		
100	1	1	16-QAM	24.19	24.08	24.05	23.91	0.2460
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = 0.15 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	22.29	22.23	22.17	22.44	0.1754
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = 0.15 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	22.29	22.16	22.26	22.44	0.1754
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = 0.15 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	22.31	22.15	22.31	22.46	0.1762
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = 0.15 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	22.32	22.15	22.31	22.47	0.1766
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = 0.15 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	22.35	22.18	22.32	22.50	0.1778
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = 0.15 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	22.41	22.21	22.15	22.56	0.1803
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = 0.15 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
60	1	1	PI/2 BPSK	22.34	22.31	22.16	22.49	0.1774
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = 0.15 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
70	1	1	PI/2 BPSK	22.35	22.40	22.22	22.55	0.1799
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = 0.15 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
80	1	1	PI/2 BPSK	22.40	22.28	22.23	22.55	0.1799
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = 0.15 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
90	1	1	PI/2 BPSK	22.42	22.31	22.31	22.57	0.1807
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 PC2 Maximum Average Power [dBm] (GT - LC = 0.15 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
100	1	1	PI/2 BPSK	-	22.30	-	22.45	0.1758
100	1	1	QPSK	-	22.28	-		
100	1	1	16-QAM	-	21.08	-	21.23	0.1327
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.28 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	25.78	25.95	25.01	25.67	0.3690
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.28 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	25.89	25.92	25.48	25.64	0.3664
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.28 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	25.86	25.83	25.56	25.58	0.3614
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.28 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	25.78	25.72	25.62	25.50	0.3548
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.28 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	25.56	25.41	25.48	25.28	0.3373
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.28 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	25.83	25.61	25.82	25.55	0.3589
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.28 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
60	1	1	PI/2 BPSK	25.78	25.55	25.74	25.50	0.3548
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.28 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
70	1	1	PI/2 BPSK	25.61	25.31	25.42	25.33	0.3412
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.28 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
80	1	1	PI/2 BPSK	25.52	25.33	25.27	25.24	0.3342
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.28 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
90	1	1	PI/2 BPSK	25.44	25.28	25.18	25.16	0.3281
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 PC2 Maximum Average Power [dBm] (GT - LC = -0.28 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
100	1	1	PI/2 BPSK	-	25.21	-	24.98	0.3148
100	1	1	QPSK	-	25.26	-		
100	1	1	16-QAM	-	24.15	-	23.87	0.2438
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = 0.15 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	22.71	22.76	22.57	22.91	0.1954
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = 0.15 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	22.54	22.71	22.47	22.86	0.1932
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = 0.15 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	22.68	22.62	22.41	22.83	0.1919
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = 0.15 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	22.52	22.26	22.27	22.67	0.1849
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = 0.15 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	22.48	22.26	22.43	22.63	0.1832
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = 0.15 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	22.73	22.46	22.74	22.89	0.1945
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = 0.15 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
60	1	1	PI/2 BPSK	22.68	22.44	22.58	22.83	0.1919
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = 0.15 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
70	1	1	PI/2 BPSK	22.33	22.07	22.14	22.48	0.1770
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = 0.15 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
80	1	1	PI/2 BPSK	22.25	22.05	22.03	22.40	0.1738
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = 0.15 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
90	1	1	PI/2 BPSK	22.19	22.08	21.95	22.34	0.1714
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 PC2 Maximum Average Power [dBm] (GT - LC = 0.15 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
100	1	1	PI/2 BPSK	-	22.01	-	22.16	0.1644
100	1	1	QPSK	-	22.01	-		
100	1	1	16-QAM	-	21.31	-	21.46	0.1400
Limit	EIRP < 1W			Result			Pass	



Appendix B. Radiated Spurious Emission Test Data

B1. Summary of each worse mode

Mode	Band	Part	Ch	Freq (MHz)	Level (dBm)	Det	Ant Factor (dB)	Amp/Cbl (dB)	Filter (dB)	EIRPCF (dB)	Reading (dBuV)	Limit (dBm)	Margin (dB)	Pol	Ant
9	NR SA n71	Part 27N	L	1992	-41.93	RMS	26.40	-28.50	0.37	-95.23	55.03	-13.00	-28.93	H	8
14	NR SA n77	Part 27Q	H	14125	-35.52	RMS	40.70	-15.35	0.44	-95.23	33.92	-13.00	-22.52	H	8
15	EN-DC B2+n77	Part 27Q	M	13965	-35.60	RMS	40.53	-15.34	0.45	-95.23	33.99	-13.00	-22.60	V	8+5
17	NR SA n77	Part 27O	L	14805	-34.33	RMS	40.28	-15.44	0.39	-95.23	35.67	-13.00	-21.33	H	8
18	EN-DC B2+n77	Part 27O	H	11883	-33.97	RMS	38.57	-18.13	0.60	-95.23	40.22	-13.00	-20.97	V	8+5
19	NR SA n14	Part 90R	H	1587	-61.03	RMS	25.30	-29.63	0.35	-95.23	38.18	-42.15	-18.88	H	5
20	NR SA n14	Part 90R	M	1577	-63.05	RMS	25.30	-29.66	0.34	-95.23	36.20	-42.15	-20.90	V	5




Ant. 8

Part 27N Mode 9

NR SA n71 20M Ch134600 1RB1 BPSK

L

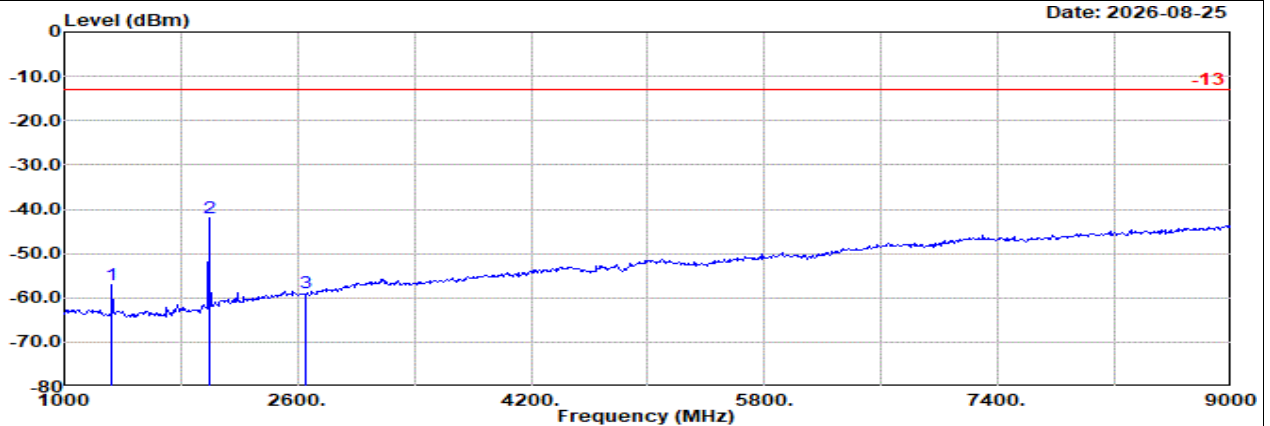


Site : 03CH12-HY

Condition: -13 3m 9120D-01212 Horizontal

: NR SA n71 20M Ch134600 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin		Pol
				Factor	1							
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1328.00	-56.98	RMS		25.68	-30.30	0.44	-95.23	42.43	-13.00	-43.98	Horizontal
2	1992.00	-41.93	RMS		26.40	-28.50	0.37	-95.23	55.03	-13.00	-28.93	Horizontal
3	2657.00	-58.95	RMS		28.10	-26.91	0.04	-95.23	35.05	-13.00	-45.95	Horizontal

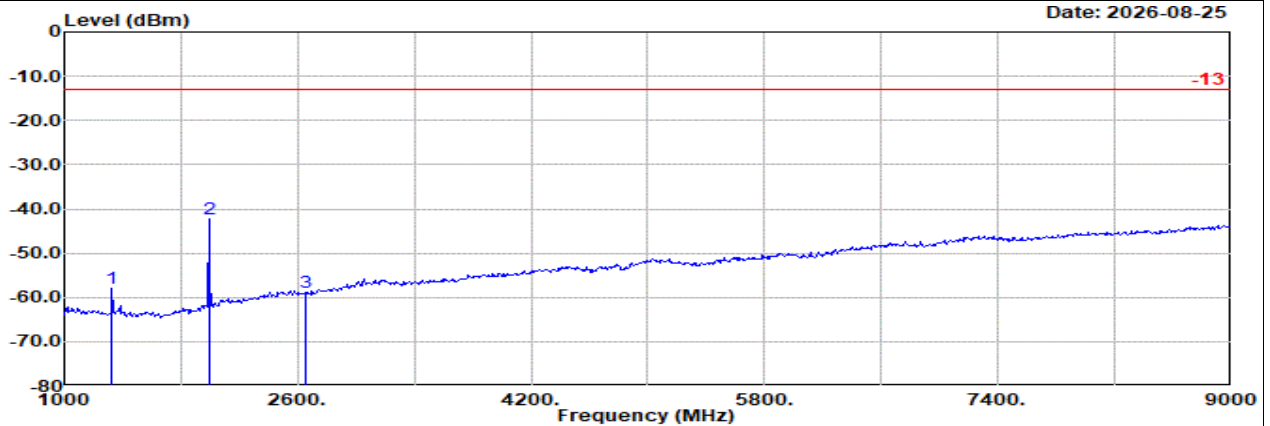

Site : 03CH12-HY

Condition: -13 3m 9120D-01212 Vertical

: NR SA n71 20M Ch134600 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin		Pol
				Factor	1							
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1328.00	-57.86	RMS		25.68	-30.30	0.44	-95.23	41.55	-13.00	-44.86	Vertical
2	1992.00	-42.30	RMS		26.40	-28.50	0.37	-95.23	54.66	-13.00	-29.30	Vertical
3	2657.00	-58.89	RMS		28.10	-26.91	0.04	-95.23	35.11	-13.00	-45.89	Vertical




Ant. 8

Part 27N Mode 9


NR SA n71 20M Ch136100 1RB1 BPSK

M

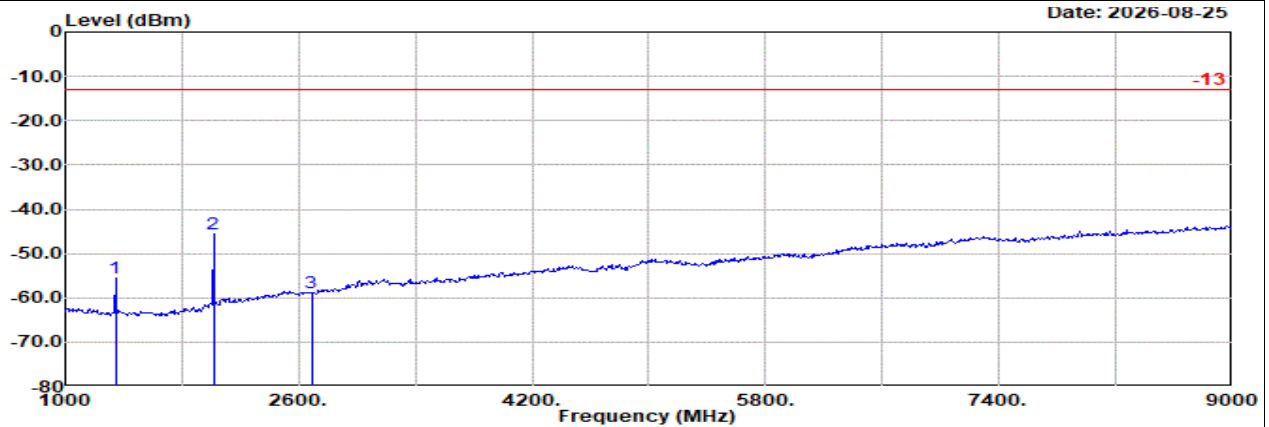

Site : 03CH12-HY
Condition: -13 3m 9120D-01212 Horizontal
NR SA n71 20M Ch136100 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1		dB	dB				
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1343.00	-55.43	RMS	25.73	-30.27	0.41	-95.23	43.93	-13.00	-42.43	Horizontal	
2	2015.00	-45.56	RMS	26.55	-28.44	0.37	-95.23	51.19	-13.00	-32.56	Horizontal	
3	2687.00	-58.74	RMS	28.10	-26.87	0.04	-95.23	35.22	-13.00	-45.74	Horizontal	

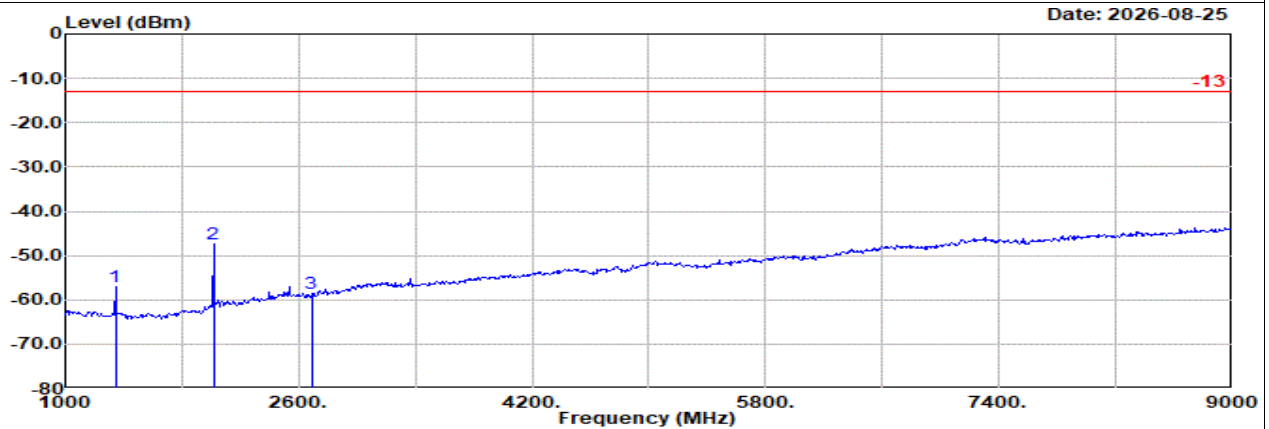

Site : 03CH12-HY
Condition: -13 3m 9120D-01212 Vertical
NR SA n71 20M Ch136100 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1		dB	dB				
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1343.00	-57.01	RMS	25.73	-30.27	0.41	-95.23	42.35	-13.00	-44.01	Vertical	
2	2015.00	-47.44	RMS	26.55	-28.44	0.37	-95.23	49.31	-13.00	-34.44	Vertical	
3	2687.00	-58.63	RMS	28.10	-26.87	0.04	-95.23	35.33	-13.00	-45.63	Vertical	




Ant. 8

Part 27N Mode 9


NR SA n71 20M Ch137600 1RB1 BPSK

H

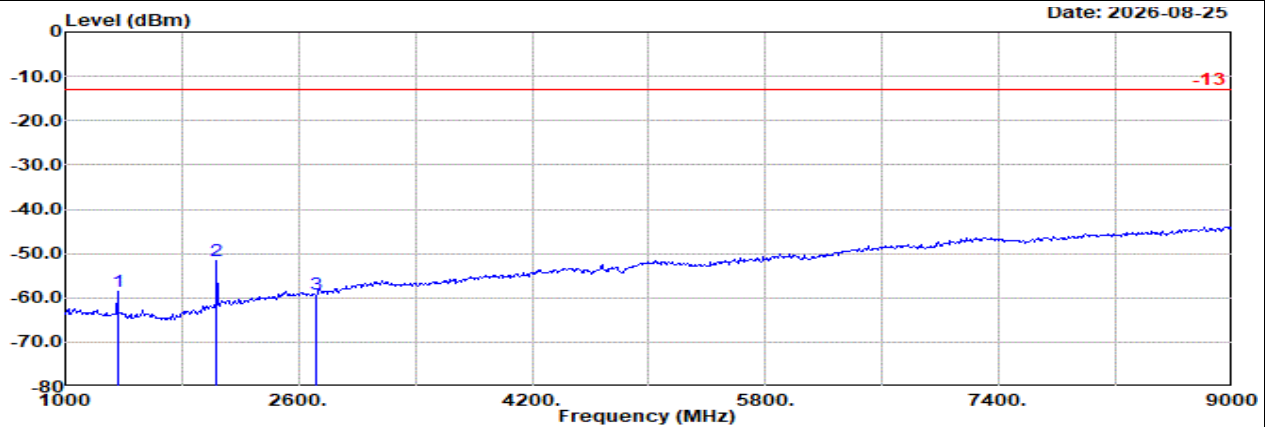

Site : 03CH12-HY
Condition: -13 3m 9120D-01212 Horizontal
: NR SA n71 20M Ch137600 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1		g			
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	1359.00	-58.43	RMS	25.71	-30.23	0.38	-95.23	40.94	-13.00	-45.43 Horizontal
2	2038.00	-51.75	RMS	26.88	-28.37	0.37	-95.23	44.60	-13.00	-38.75 Horizontal
3	2717.00	-59.21	RMS	28.27	-26.83	0.04	-95.23	34.54	-13.00	-46.21 Horizontal

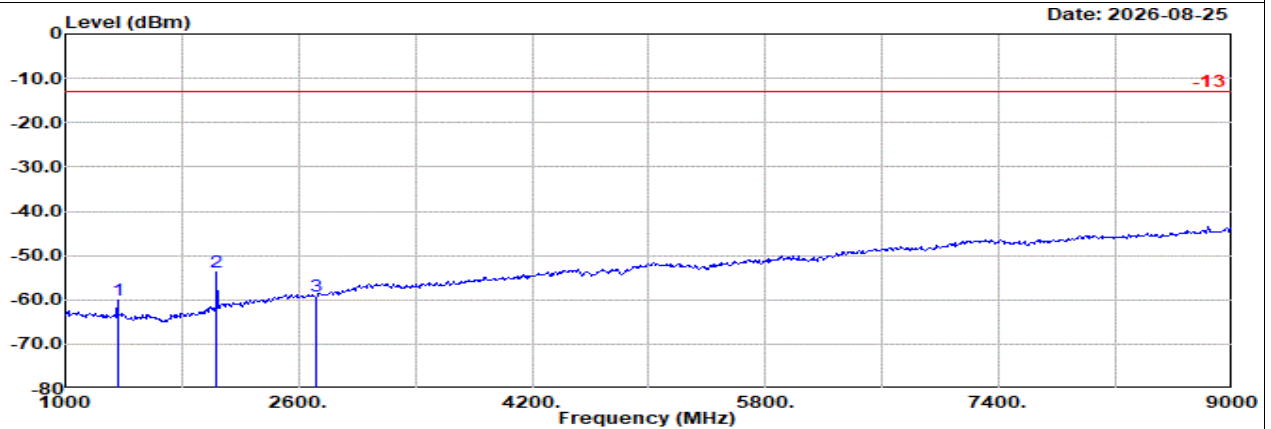

Site : 03CH12-HY
Condition: -13 3m 9120D-01212 Vertical
: NR SA n71 20M Ch137600 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1		g			
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	1359.00	-59.96	RMS	25.71	-30.23	0.38	-95.23	39.41	-13.00	-46.96 Vertical
2	2038.00	-53.65	RMS	26.88	-28.37	0.37	-95.23	42.70	-13.00	-40.65 Vertical
3	2717.00	-59.23	RMS	28.27	-26.83	0.04	-95.23	34.52	-13.00	-46.23 Vertical




Ant. 8

Part 27Q Mode 14


NR SA n77 20M Ch630668 1RB1 BPSK

L

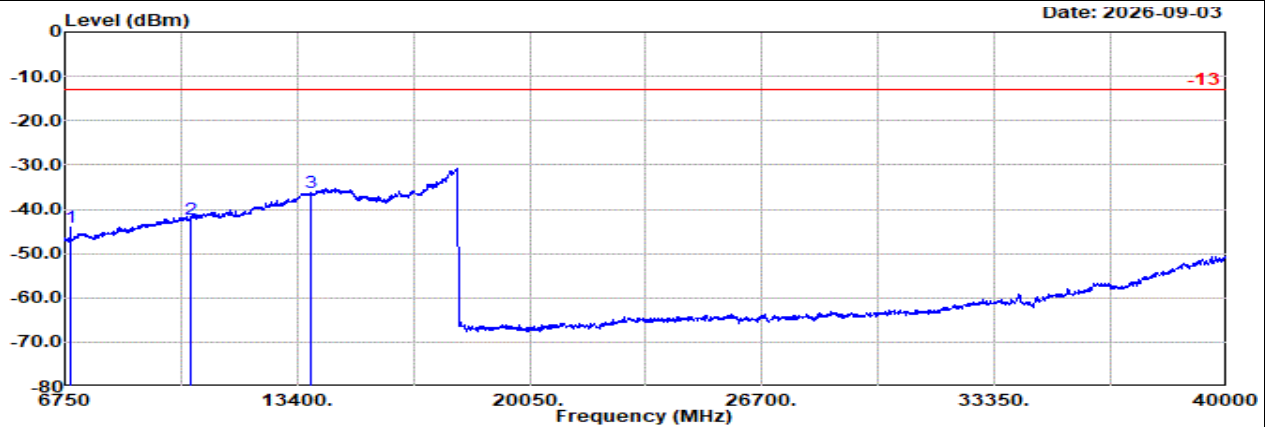

Site : 03CH12-HY
Condition: -13 3m 9120D-01212 Horizontal
: NR Band 77 20M Ch630668 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
1	6903.00	-44.14	RMS	35.80	-21.85	1.34	-95.23	35.80	-13.00	-31.14	Horizontal
2	10354.00	-42.30	RMS	38.51	-19.56	0.59	-95.23	33.39	-13.00	-29.30	Horizontal
3	13805.00	-36.30	RMS	40.29	-15.20	0.46	-95.23	33.38	-13.00	-23.30	Horizontal

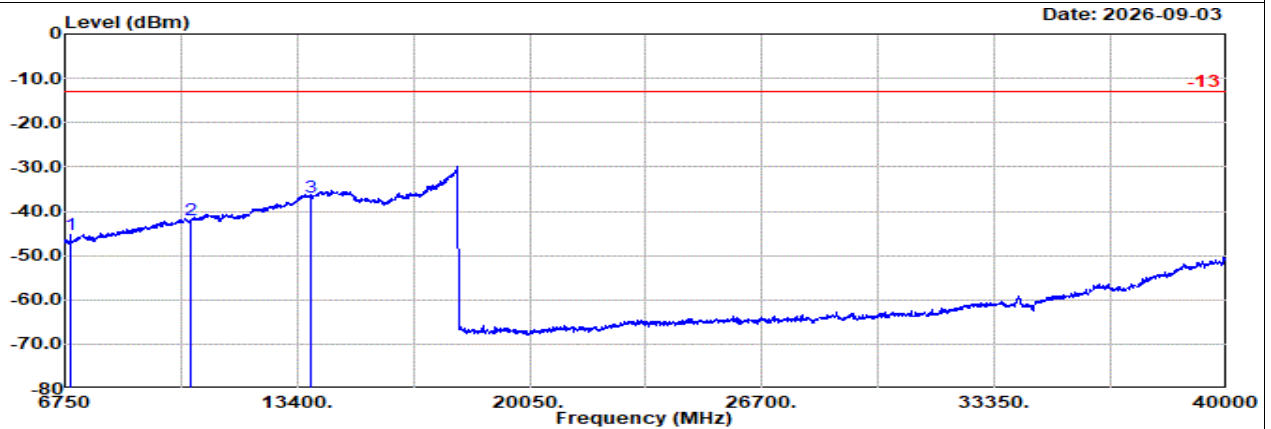

Site : 03CH12-HY
Condition: -13 3m 9120D-01212 Vertical
: NR Band 77 20M Ch630668 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
1	6903.00	-45.43	RMS	35.80	-21.85	1.34	-95.23	34.51	-13.00	-32.43	Vertical
2	10354.00	-41.83	RMS	38.51	-19.56	0.59	-95.23	33.86	-13.00	-28.83	Vertical
3	13805.00	-36.76	RMS	40.29	-15.20	0.46	-95.23	32.92	-13.00	-23.76	Vertical




Ant. 8

Part 27Q Mode 14

NR SA n77 20M Ch633334 1RB1 BPSK

M

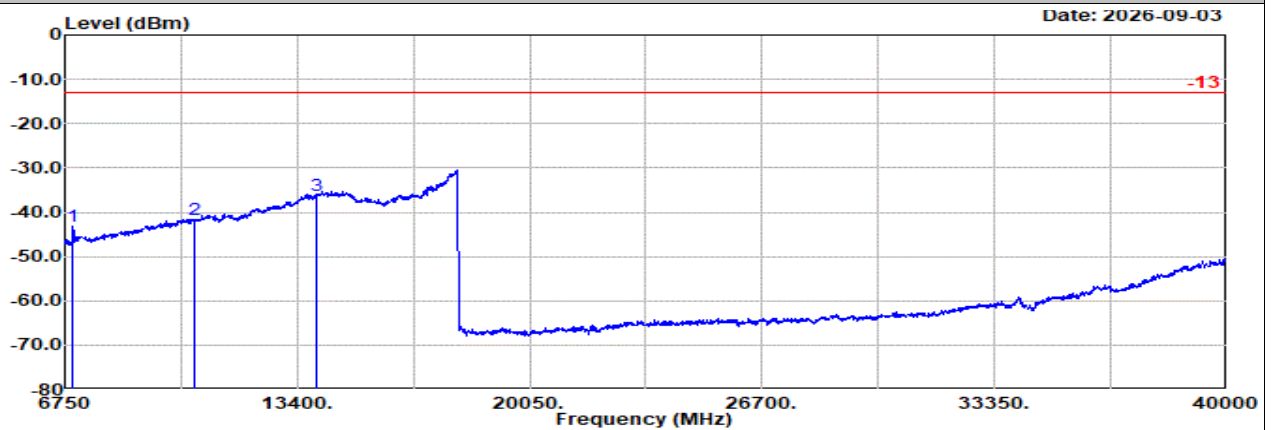


Site : 03CH12-HY

Condition: -13 3m 9120D-01212 Horizontal

: NR Band 77 20M Ch633334 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	Amp\Cb						
	MHz	dBm			1			g		dB	
1	6983.00	-43.05	RMS	35.80	-21.77	1.27	-95.23	36.88	-13.00	-30.05	Horizontal
2	10474.00	-41.52	RMS	38.60	-19.41	0.59	-95.23	33.93	-13.00	-28.52	Horizontal
3	13965.00	-36.20	RMS	40.53	-15.34	0.45	-95.23	33.39	-13.00	-23.20	Horizontal

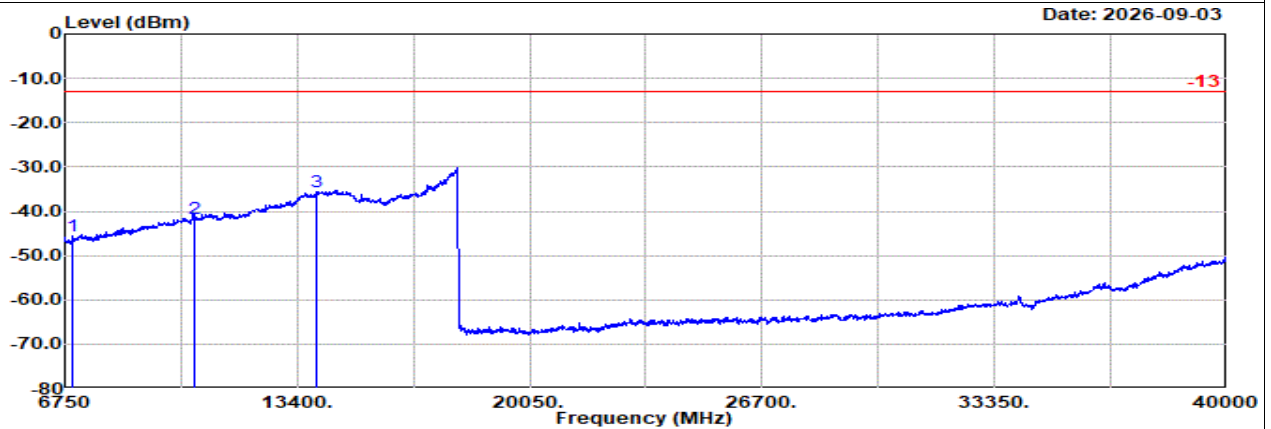

Site : 03CH12-HY

Condition: -13 3m 9120D-01212 Vertical

: NR Band 77 20M Ch633334 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	Amp\Cb						
	MHz	dBm			1			g		dB	
1	6983.00	-45.66	RMS	35.80	-21.77	1.27	-95.23	34.27	-13.00	-32.66	Vertical
2	10474.00	-41.64	RMS	38.60	-19.41	0.59	-95.23	33.81	-13.00	-28.64	Vertical
3	13965.00	-35.77	RMS	40.53	-15.34	0.45	-95.23	33.82	-13.00	-22.77	Vertical




Ant. 8

Part 27Q Mode 14

NR SA n77 20M Ch636000 1RB1 BPSK

H

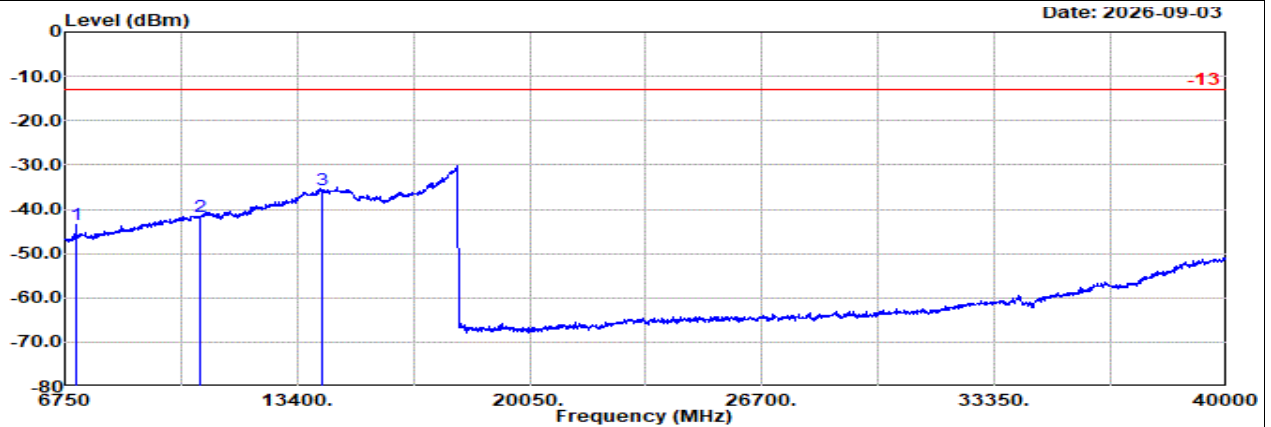


Site : 03CH12-HY

Condition: -13 3m 9120D-01212 Horizontal

: NR Band 77 20M Ch636000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
					dB/m	dB						
1	7063.00	-43.54	RMS	36.25	-21.73	1.16	-95.23	36.01	-13.00	-30.54	Horizontal	
2	10594.00	-41.68	RMS	38.79	-19.24	0.59	-95.23	33.41	-13.00	-28.68	Horizontal	
3	14125.00	-35.52	RMS	40.70	-15.35	0.44	-95.23	33.92	-13.00	-22.52	Horizontal	

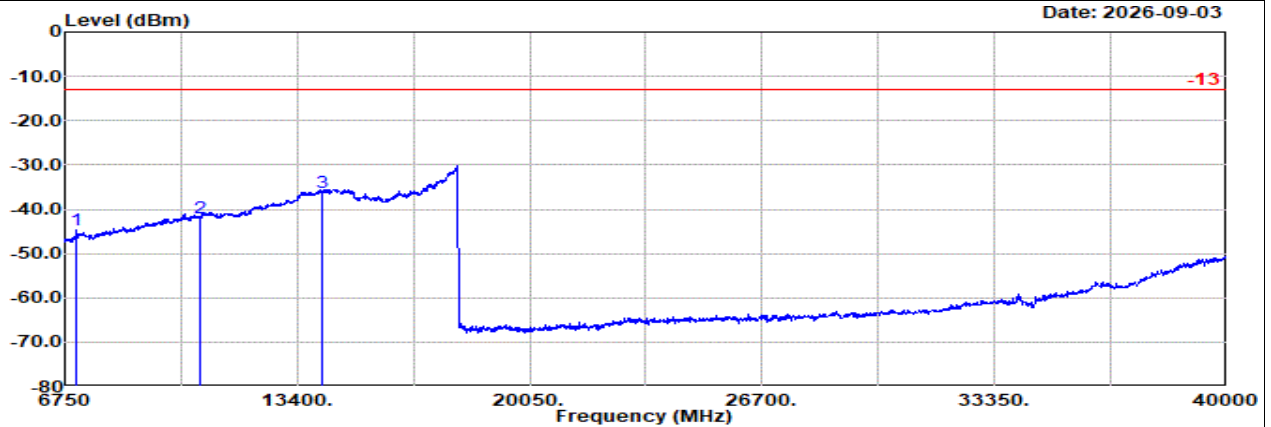

Site : 03CH12-HY

Condition: -13 3m 9120D-01212 Vertical

: NR Band 77 20M Ch636000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
					dB/m	dB						
1	7063.00	-44.75	RMS	36.25	-21.73	1.16	-95.23	34.80	-13.00	-31.75	Vertical	
2	10594.00	-41.91	RMS	38.79	-19.24	0.59	-95.23	33.18	-13.00	-28.91	Vertical	
3	14125.00	-36.14	RMS	40.70	-15.35	0.44	-95.23	33.30	-13.00	-23.14	Vertical	




Ant. 8+5

Part 27Q Mode 15


EN-DC B2+n77 10M + 20M Ch18900 1RB0 QPSK + Ch630668 1RB1 BPSK

L

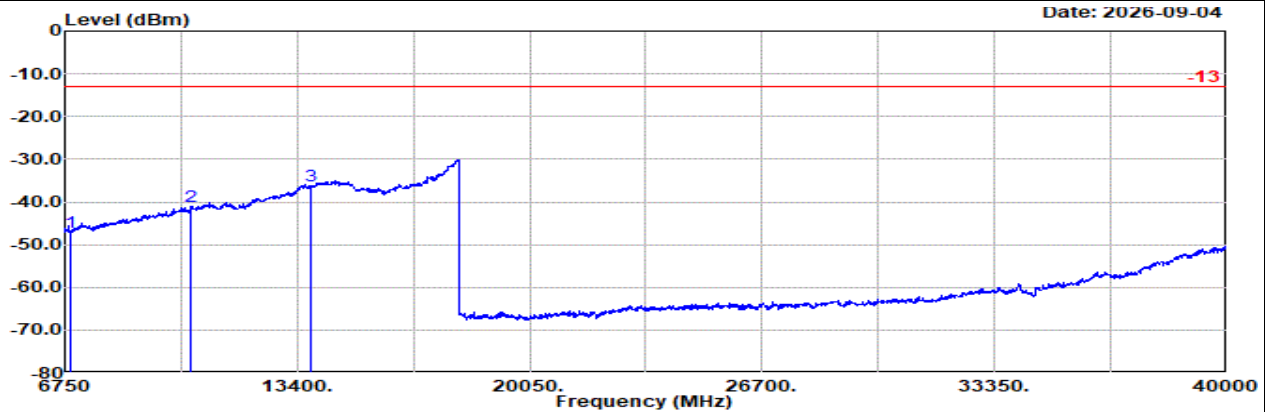

Site : 03CH12-HY
Condition: -13 1m BBHA9170_1223_260812 Horizontal
: LTE Band 2 10M Ch18900 1RB0 QPSK
: NR Band 77 20M Ch630668 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
				Factor	1			dBm	dB		
1	6903.00	-47.01	RMS	35.80	-21.85	1.34	-95.23	32.93	-13.00	-34.01	Horizontal
2	10354.00	-41.03	RMS	38.51	-19.56	0.59	-95.23	34.66	-13.00	-28.03	Horizontal
3	13805.00	-36.25	RMS	40.29	-15.20	0.46	-95.23	33.43	-13.00	-23.25	Horizontal

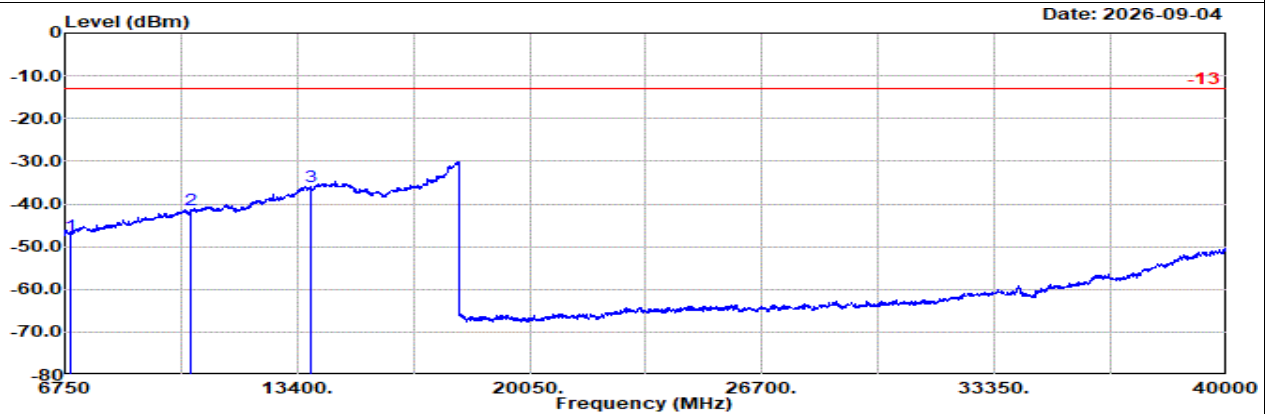

Site : 03CH12-HY
Condition: -13 1m BBHA9170_1223_260812 Vertical
: LTE Band 2 10M Ch18900 1RB0 QPSK
: NR Band 77 20M Ch630668 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
				Factor	1			dBm	dB		
1	6903.00	-47.26	RMS	35.80	-21.85	1.34	-95.23	32.68	-13.00	-34.26	Vertical
2	10354.00	-41.50	RMS	38.51	-19.56	0.59	-95.23	34.19	-13.00	-28.50	Vertical
3	13805.00	-36.07	RMS	40.29	-15.20	0.46	-95.23	33.61	-13.00	-23.07	Vertical




Ant. 8+5

Part 27Q Mode 15

EN-DC B2+n77 10M + 20M Ch18900 1RB0 QPSK + Ch633334 1RB1 BPSK

M

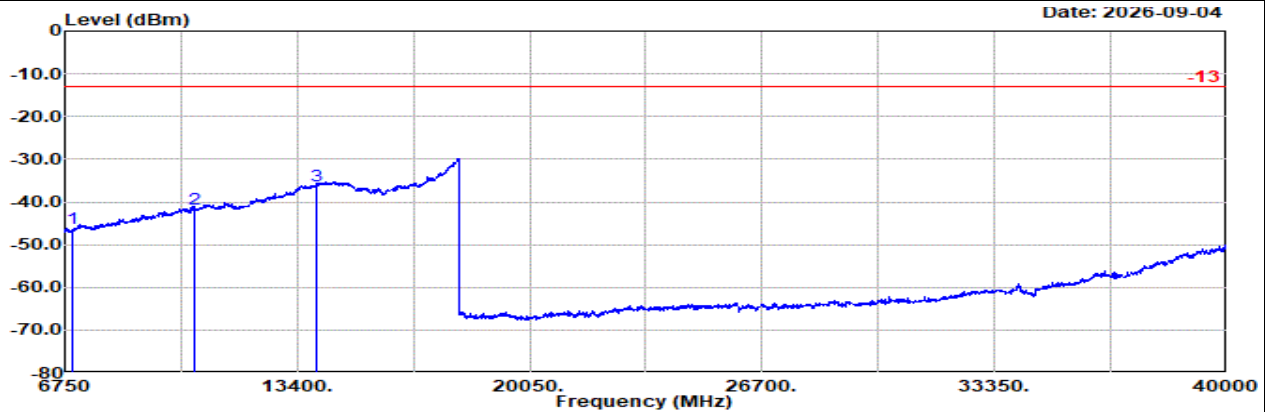


Site : 03CH12-HY

Condition: -13 1m BBHA9170_1223_260812 Horizontal

: LTE Band 2 10M Ch18900 1RB0 QPSK

: NR Band 77 20M Ch633334 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
				Factor	1			dBm	dB		
1	6983.00	-46.29	RMS	35.80	-21.77	1.27	-95.23	33.64	-13.00	-33.29	Horizontal
2	10474.00	-41.54	RMS	38.60	-19.41	0.59	-95.23	33.91	-13.00	-28.54	Horizontal
3	13965.00	-36.11	RMS	40.53	-15.34	0.45	-95.23	33.48	-13.00	-23.11	Horizontal

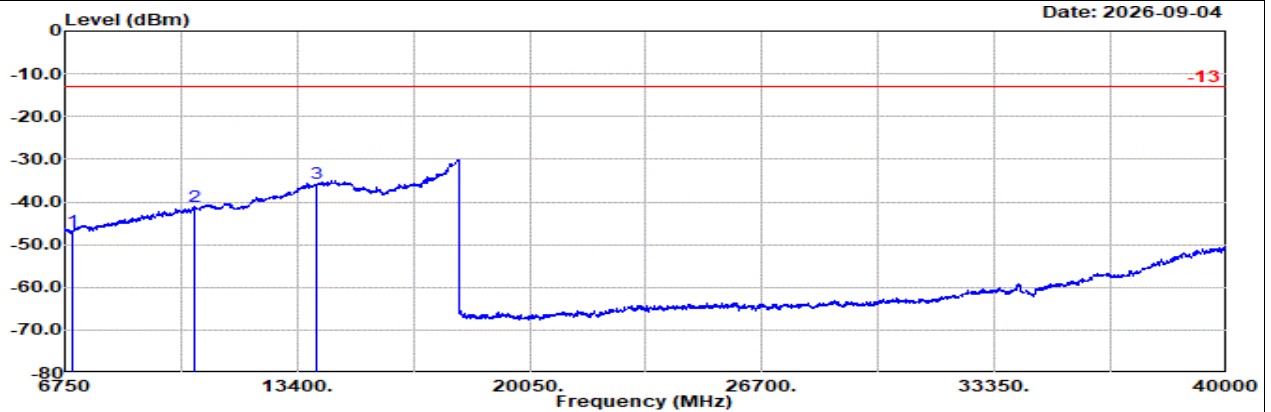

Site : 03CH12-HY

Condition: -13 1m BBHA9170_1223_260812 Vertical

: LTE Band 2 10M Ch18900 1RB0 QPSK

: NR Band 77 20M Ch633334 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
				Factor	1			dBm	dB		
1	6983.00	-46.64	RMS	35.80	-21.77	1.27	-95.23	33.29	-13.00	-33.64	Vertical
2	10474.00	-41.00	RMS	38.60	-19.41	0.59	-95.23	34.45	-13.00	-28.00	Vertical
3	13965.00	-35.60	RMS	40.53	-15.34	0.45	-95.23	33.99	-13.00	-22.60	Vertical




Ant. 8+5

Part 27Q Mode 15

EN-DC B2+n77 10M + 20M Ch18900 1RB0 QPSK + Ch636000 1RB1 BPSK

H

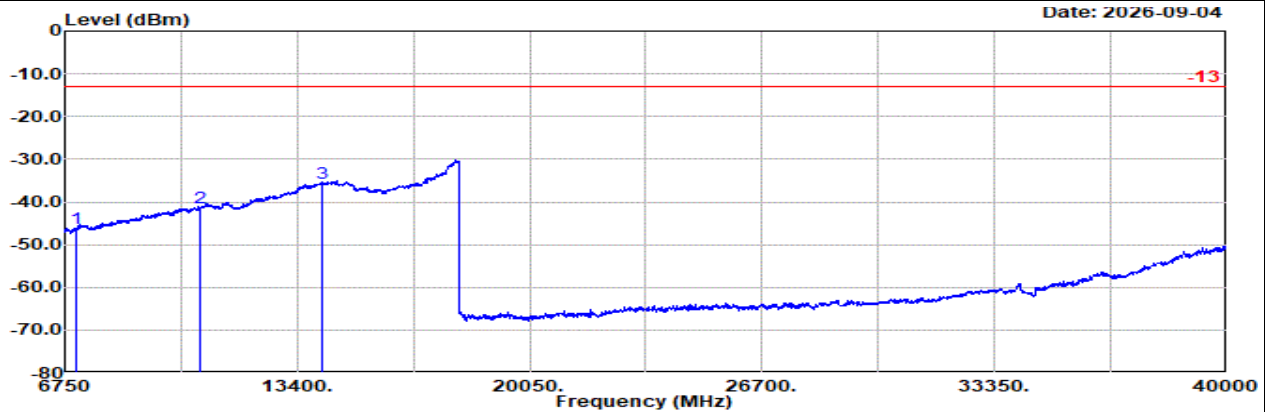


Site : 03CH12-HY

Condition: -13 1m BBHA9170_1223_260812 Horizontal

: LTE Band 2 10M Ch18900 1RB0 QPSK

: NR Band 77 20M Ch636000 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
				Factor	1			dBm	dB		
1	7063.00	-46.14	RMS	36.25	-21.73	1.16	-95.23	33.41	-13.00	-33.14	Horizontal
2	10594.00	-41.47	RMS	38.79	-19.24	0.59	-95.23	33.62	-13.00	-28.47	Horizontal
3	14125.00	-35.75	RMS	40.70	-15.35	0.44	-95.23	33.69	-13.00	-22.75	Horizontal

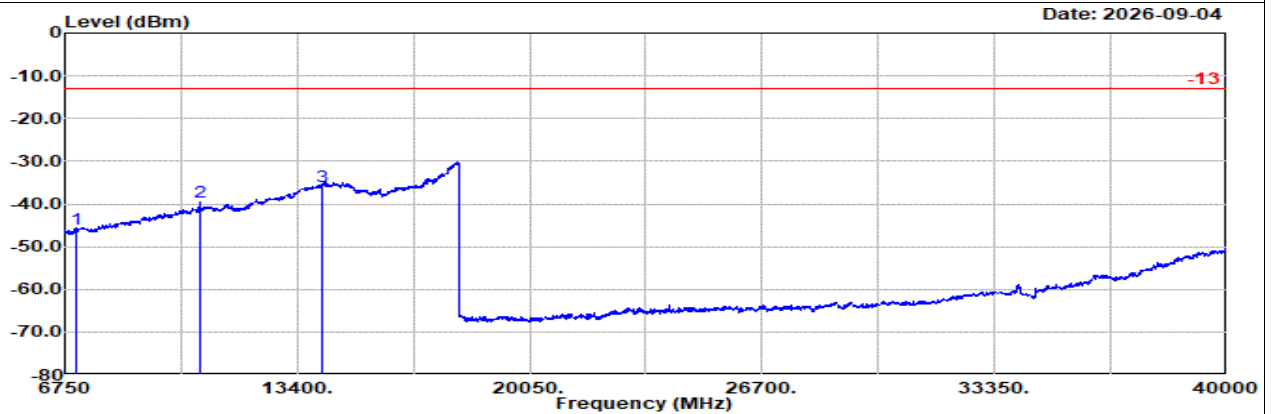

Site : 03CH12-HY

Condition: -13 1m BBHA9170_1223_260812 Vertical

: LTE Band 2 10M Ch18900 1RB0 QPSK

: NR Band 77 20M Ch636000 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
				Factor	1			dBm	dB		
1	7063.00	-45.98	RMS	36.25	-21.73	1.16	-95.23	33.57	-13.00	-32.98	Vertical
2	10594.00	-39.51	RMS	38.79	-19.24	0.59	-95.23	35.58	-13.00	-26.51	Vertical
3	14125.00	-35.78	RMS	40.70	-15.35	0.44	-95.23	33.66	-13.00	-22.78	Vertical




Ant. 8

Part 270 Mode 17

NR SA n77 20M Ch647334 1RB1 BPSK

L

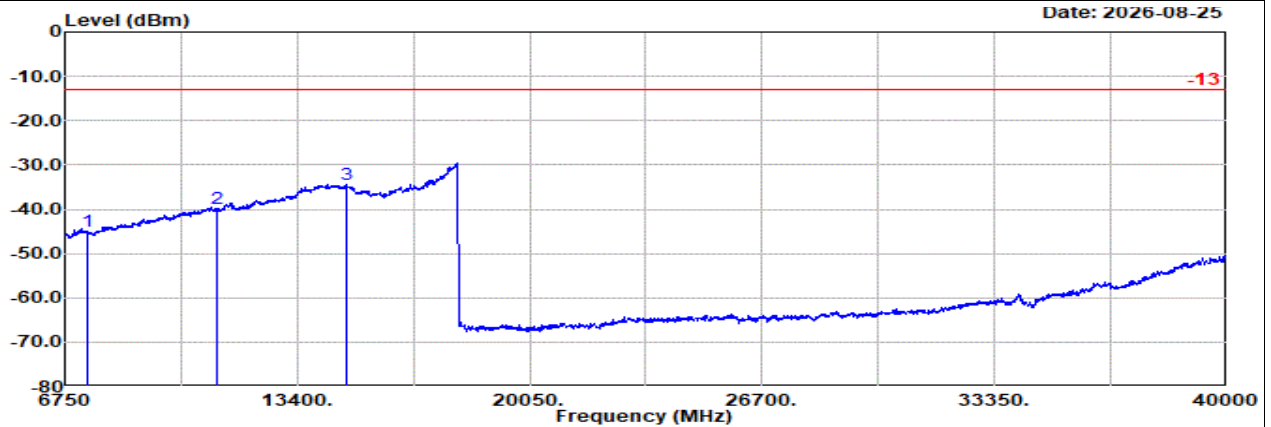


Site : 03CH12-HY

Condition: -13 3m 9120D-01212 Horizontal

: NR Band 77 20M Ch647334 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
					dB/m	dB						
1	7403.00	-44.93	RMS	36.49	-21.52	0.88	-95.23	34.45	-13.00	-31.93	Horizontal	
2	11104.00	-39.97	RMS	38.79	-18.61	0.60	-95.23	34.48	-13.00	-26.97	Horizontal	
3	14805.00	-34.33	RMS	40.28	-15.44	0.39	-95.23	35.67	-13.00	-21.33	Horizontal	

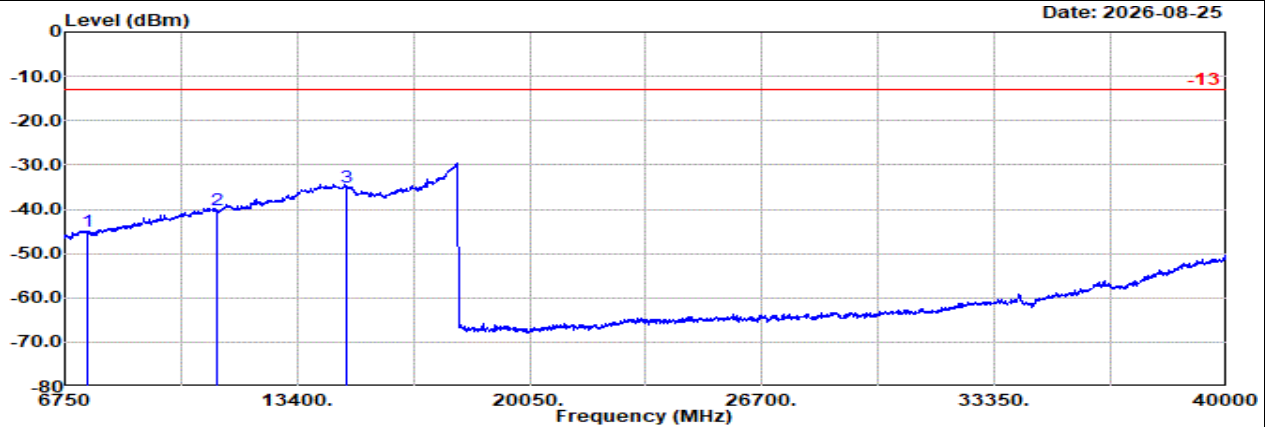

Site : 03CH12-HY

Condition: -13 3m 9120D-01212 Vertical

: NR Band 77 20M Ch647334 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
					dB/m	dB						
1	7403.00	-44.96	RMS	36.49	-21.52	0.88	-95.23	34.42	-13.00	-31.96	Vertical	
2	11104.00	-40.28	RMS	38.79	-18.61	0.60	-95.23	34.17	-13.00	-27.28	Vertical	
3	14805.00	-35.05	RMS	40.28	-15.44	0.39	-95.23	34.95	-13.00	-22.05	Vertical	




Ant. 8

Part 270 Mode 17

NR SA n77 20M Ch656000 1RB1 BPSK

M

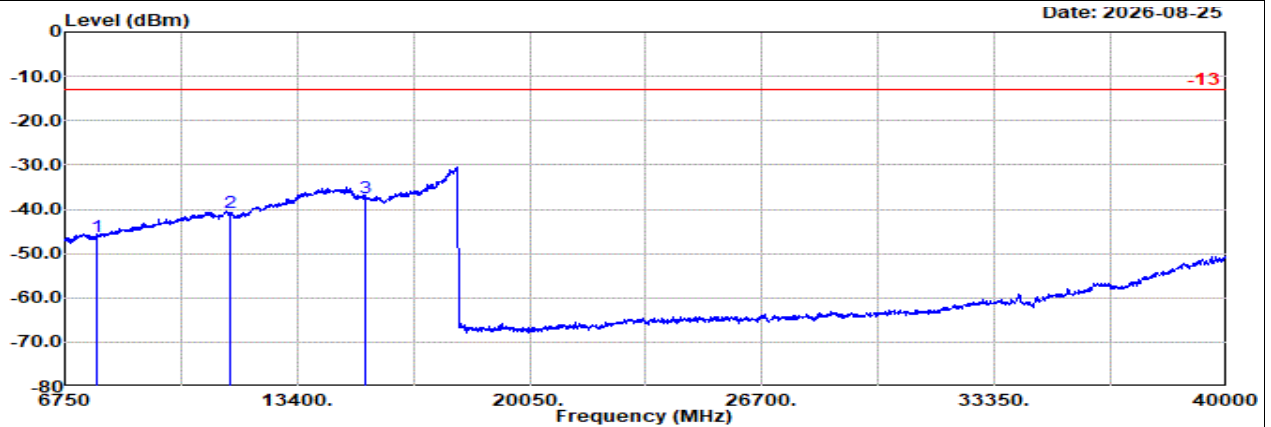


Site : 03CH12-HY

Condition: -13 3m 9120D-01212 Horizontal

: NR Band 77 20M Ch656000 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	Amp\Cb						
	MHz	dBm			1			g			
1	7662.00	-46.16	RMS	36.30	-21.39	0.90	-95.23	33.26	-13.00	-33.16	Horizontal
2	11493.00	-40.78	RMS	39.09	-18.34	0.60	-95.23	33.10	-13.00	-27.78	Horizontal
3	15325.00	-37.42	RMS	38.65	-15.76	0.36	-95.23	34.56	-13.00	-24.42	Horizontal

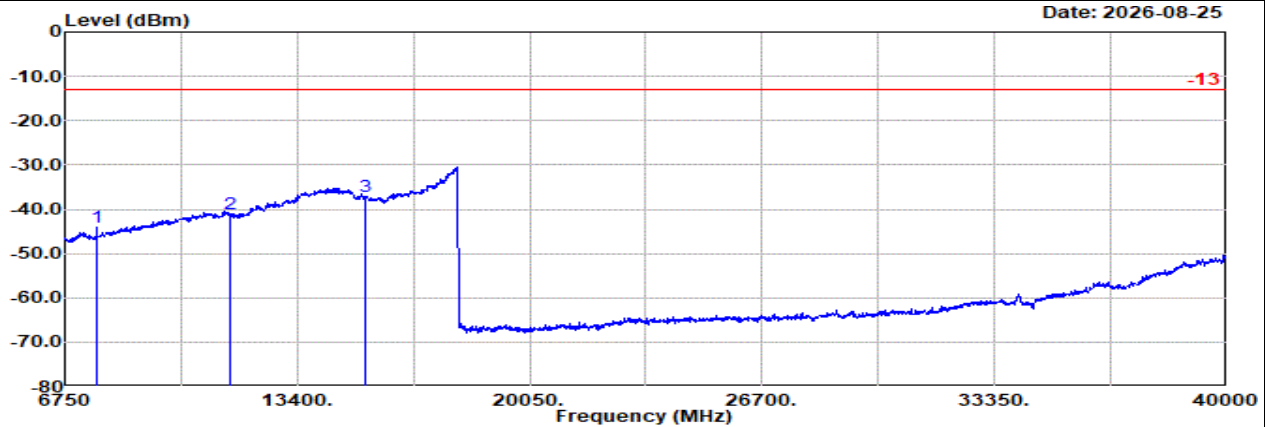

Site : 03CH12-HY

Condition: -13 3m 9120D-01212 Vertical

: NR Band 77 20M Ch656000 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	Amp\Cb						
	MHz	dBm			1			g			
1	7662.00	-44.19	RMS	36.30	-21.39	0.90	-95.23	35.23	-13.00	-31.19	Vertical
2	11493.00	-41.16	RMS	39.09	-18.34	0.60	-95.23	32.72	-13.00	-28.16	Vertical
3	15325.00	-37.20	RMS	38.65	-15.76	0.36	-95.23	34.78	-13.00	-24.20	Vertical




Ant. 8

Part 270 Mode 17

NR SA n77 20M Ch664666 1RB1 BPSK

H

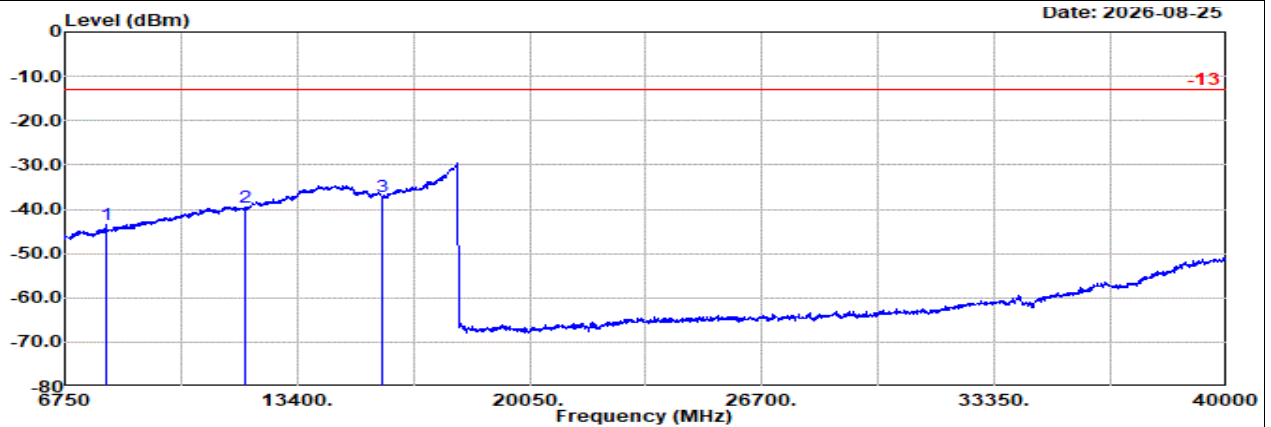


Site : 03CH12-HY

Condition: -13 3m 9120D-01212 Horizontal

NR Band 77 20M Ch664666 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
					dB/m	dB						
1	7922.00	-43.34	RMS	36.90	-21.28	0.85	-95.23	35.42	-13.00	-30.34	Horizontal	
2	11883.00	-39.62	RMS	38.57	-18.13	0.60	-95.23	34.57	-13.00	-26.62	Horizontal	
3	15845.00	-37.10	RMS	37.72	-15.61	0.32	-95.23	35.70	-13.00	-24.10	Horizontal	

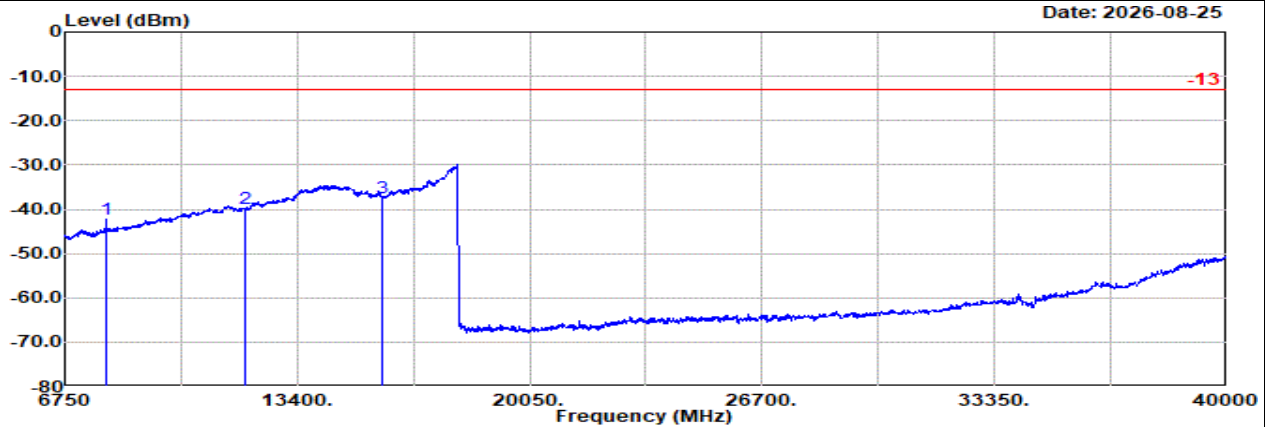

Site : 03CH12-HY

Condition: -13 3m 9120D-01212 Vertical

NR Band 77 20M Ch664666 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
					dB/m	dB						
1	7922.00	-42.27	RMS	36.90	-21.28	0.85	-95.23	36.49	-13.00	-29.27	Vertical	
2	11883.00	-39.81	RMS	38.57	-18.13	0.60	-95.23	34.38	-13.00	-26.81	Vertical	
3	15845.00	-37.31	RMS	37.72	-15.61	0.32	-95.23	35.49	-13.00	-24.31	Vertical	




Ant. 8+5

Part 270 Mode 18

EN-DC B2+n77 10M + 20M Ch18900 1RB0 QPSK + Ch647334 1RB1 BPSK

L

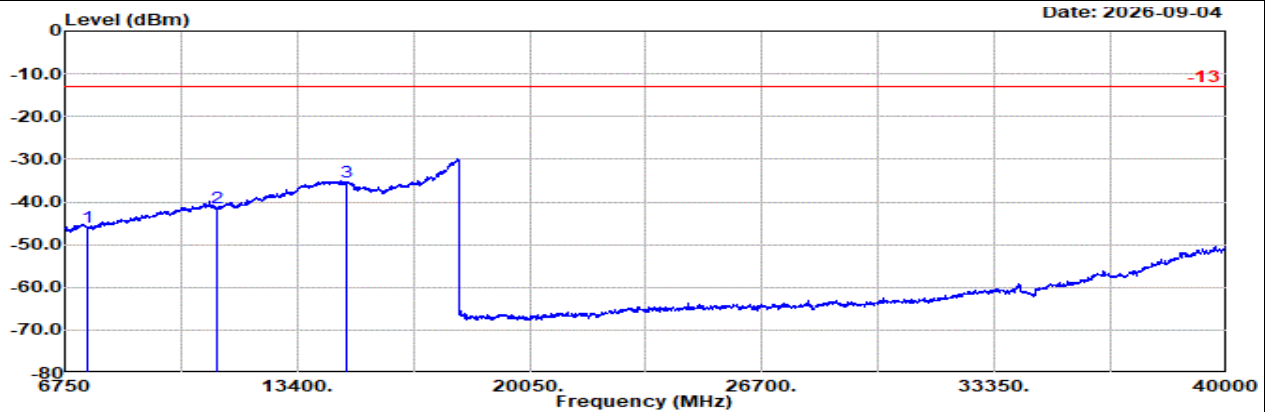


Site : 03CH12-HY

Condition: -13 1m BBHA9170_1223_260812 Horizontal

: LTE Band 2 10M Ch18900 1RB0 QPSK

: NR Band 77 20M Ch647334 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
				Factor	1			dBm	dB		
1	7403.00	-45.86	RMS	36.49	-21.52	0.88	-95.23	33.52	-13.00	-32.86	Horizontal
2	11104.00	-41.21	RMS	38.79	-18.61	0.60	-95.23	33.24	-13.00	-28.21	Horizontal
3	14805.00	-35.31	RMS	40.28	-15.44	0.39	-95.23	34.69	-13.00	-22.31	Horizontal

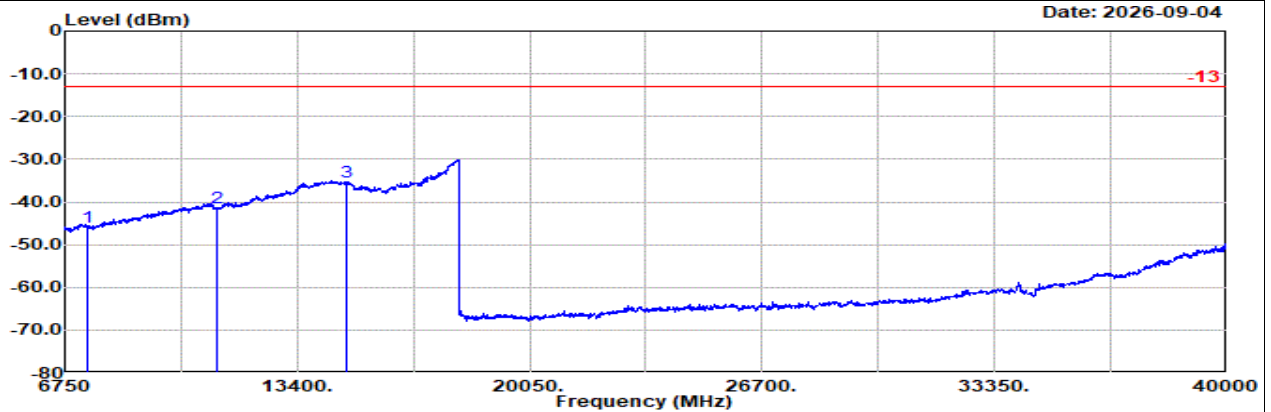

Site : 03CH12-HY

Condition: -13 1m BBHA9170_1223_260812 Vertical

: LTE Band 2 10M Ch18900 1RB0 QPSK

: NR Band 77 20M Ch647334 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
				Factor	1			dBm	dB		
1	7403.00	-45.84	RMS	36.49	-21.52	0.88	-95.23	33.54	-13.00	-32.84	Vertical
2	11104.00	-41.45	RMS	38.79	-18.61	0.60	-95.23	33.00	-13.00	-28.45	Vertical
3	14805.00	-35.46	RMS	40.28	-15.44	0.39	-95.23	34.54	-13.00	-22.46	Vertical




Ant. 8+5

Part 270 Mode 18

EN-DC B2+n77 10M + 20M Ch18900 1RB0 QPSK + Ch656000 1RB1 BPSK

M

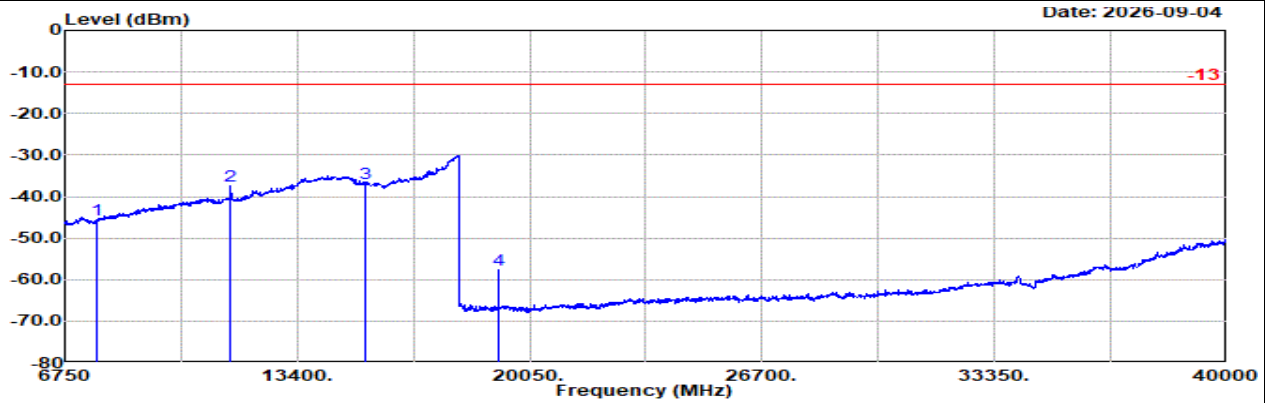


Site : 03CH12-HY

Condition: -13 1m BBHA9170_1223_260812 Horizontal

: LTE Band 2 10M Ch18900 1RB0 QPSK

: NR Band 77 20M Ch656000 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1						
	MHz	dBm				dB	dB	dBuV	dBm	dB	
1	7663.00	-45.57	RMS	36.30	-21.39	0.90	-95.23	33.85	-13.00	-32.57	Horizontal
2	11494.00	-37.50	RMS	39.09	-18.34	0.60	-95.23	36.38	-13.00	-24.50	Horizontal
3	15325.00	-36.75	RMS	38.65	-15.76	0.36	-95.23	35.23	-13.00	-23.75	Horizontal
4	19157.00	-57.62	RMS	37.90	-33.67	-9.54	-95.23	42.92	-13.00	-44.62	Horizontal

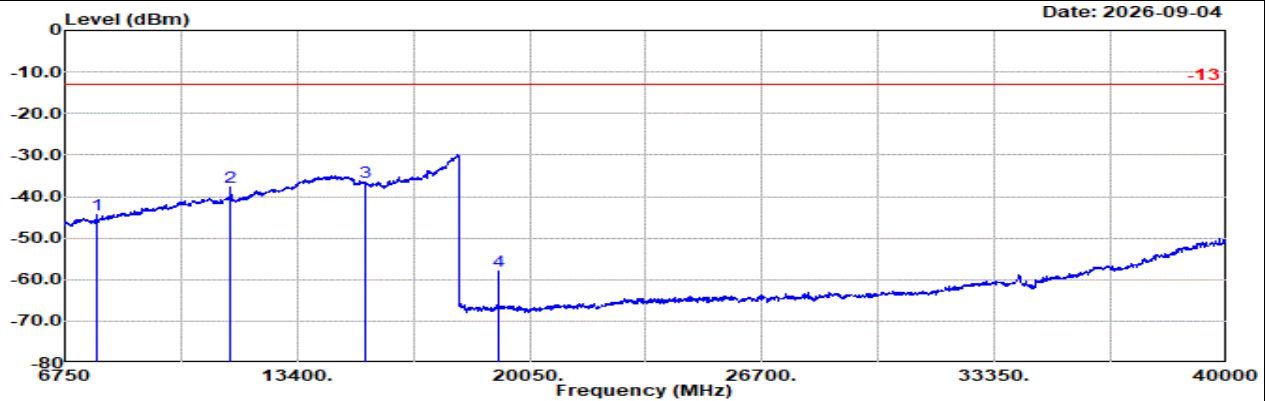

Site : 03CH12-HY

Condition: -13 1m BBHA9170_1223_260812 Vertical

: LTE Band 2 10M Ch18900 1RB0 QPSK

: NR Band 77 20M Ch656000 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1						
	MHz	dBm				dB	dB	dBuV	dBm	dB	
1	7663.00	-44.41	RMS	36.30	-21.39	0.90	-95.23	35.01	-13.00	-31.41	Vertical
2	11494.00	-37.76	RMS	39.09	-18.34	0.60	-95.23	36.12	-13.00	-24.76	Vertical
3	15325.00	-36.53	RMS	38.65	-15.76	0.36	-95.23	35.45	-13.00	-23.53	Vertical
4	19157.00	-58.02	RMS	37.90	-33.67	-9.54	-95.23	42.52	-13.00	-45.02	Vertical




Ant. 8+5

Part 270 Mode 18

EN-DC B2+n77 10M + 20M Ch18900 1RB0 QPSK + Ch664666 1RB1 BPSK

H

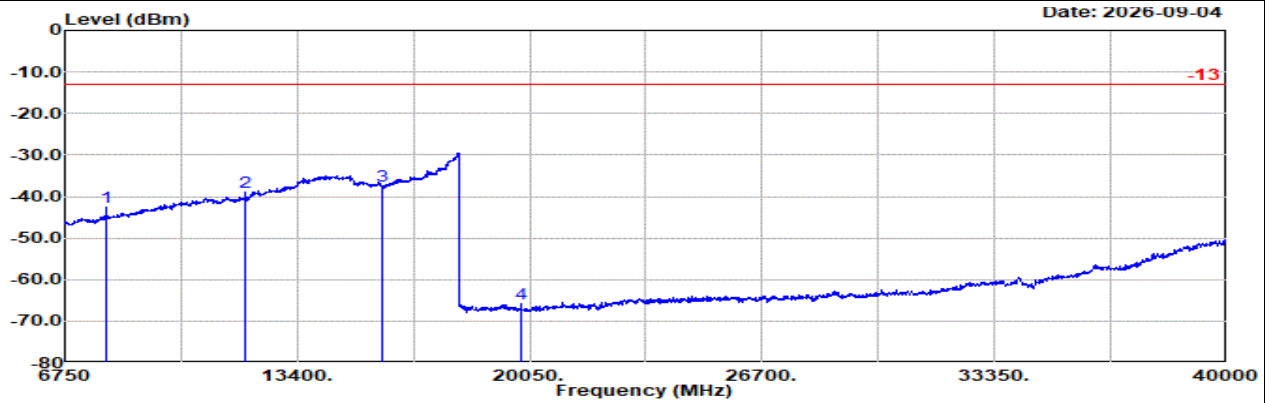


Site : 03CH12-HY

Condition: -13 1m BBHA9170_1223_260812 Horizontal

: LTE Band 2 10M Ch18900 1RB0 QPSK

: NR Band 77 20M Ch664666 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
				Factor	1			dBm	dB		
1	7922.00	-42.58	RMS	36.90	-21.28	0.85	-95.23	36.18	-13.00	-29.58	Horizontal
2	11883.00	-38.95	RMS	38.57	-18.13	0.60	-95.23	35.24	-13.00	-25.95	Horizontal
3	15845.00	-37.57	RMS	37.72	-15.61	0.32	-95.23	35.23	-13.00	-24.57	Horizontal
4	19805.00	-65.93	RMS	37.99	-33.09	-9.54	-95.23	33.94	-13.00	-52.93	Horizontal

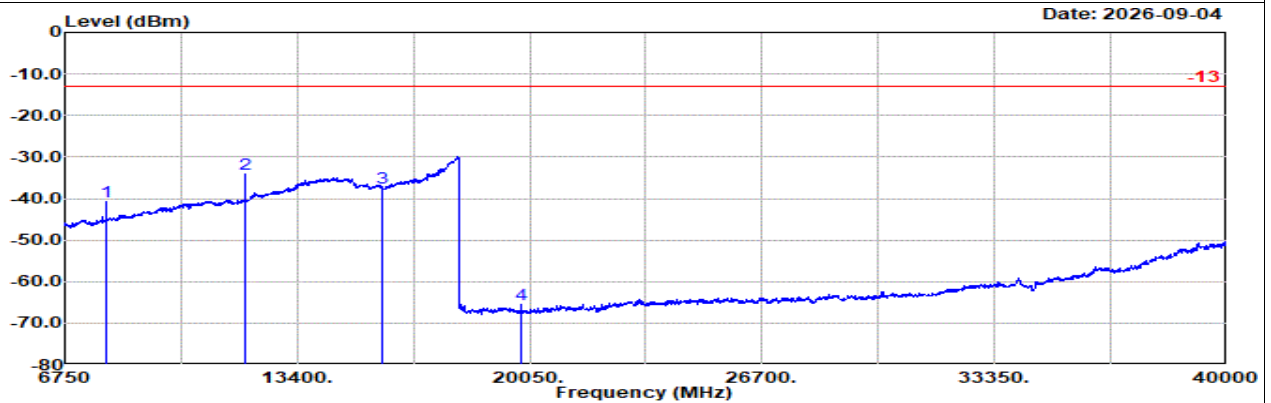

Site : 03CH12-HY

Condition: -13 1m BBHA9170_1223_260812 Vertical

: LTE Band 2 10M Ch18900 1RB0 QPSK

: NR Band 77 20M Ch664666 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
				Factor	1			dBm	dB		
1	7922.00	-40.77	RMS	36.90	-21.28	0.85	-95.23	37.99	-13.00	-27.77	Vertical
2	11883.00	-33.97	RMS	38.57	-18.13	0.60	-95.23	40.22	-13.00	-20.97	Vertical
3	15845.00	-37.48	RMS	37.72	-15.61	0.32	-95.23	35.32	-13.00	-24.48	Vertical
4	19805.00	-65.60	RMS	37.99	-33.09	-9.54	-95.23	34.27	-13.00	-52.60	Vertical




Ant. 5

Part 90R Mode 19

NR SA n14 5M Ch158100 1RB1 BPSK

L

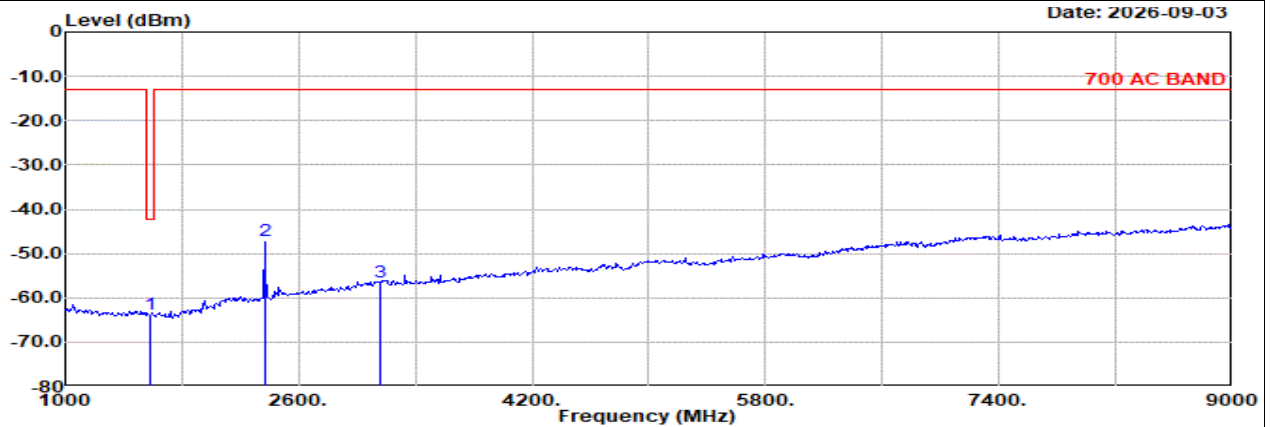


Site : 03CH12-HY

Condition: 700 AC BAND 3m 9120D-01212 Horizontal

: NR SA n14 5M Ch158100 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm				dB/m	dB	dB	dB	dB	
1	1577.00	-63.65	RMS	25.30	-29.66	0.34	-95.23	-62.89	-42.15	-21.50	Horizontal
2	2366.00	-47.13	RMS	27.30	-27.47	0.14	-95.23	48.13	-13.00	-34.13	Horizontal
3	3154.00	-56.34	RMS	30.10	-26.24	0.04	-95.23	34.99	-13.00	-43.34	Horizontal

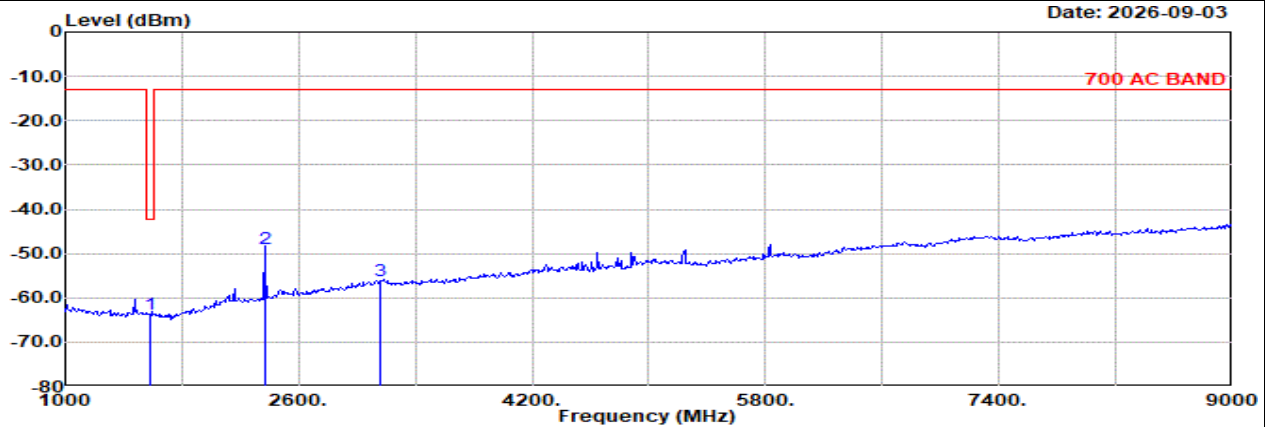

Site : 03CH12-HY

Condition: 700 AC BAND 3m 9120D-01212 Vertical

: NR SA n14 5M Ch158100 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm				dB/m	dB	dB	dB	dB	
1	1577.00	-63.61	RMS	25.30	-29.66	0.34	-95.23	35.64	-42.15	-21.46	Vertical
2	2366.00	-48.95	RMS	27.30	-27.47	0.14	-95.23	46.31	-13.00	-35.95	Vertical
3	3154.00	-56.28	RMS	30.10	-26.24	0.04	-95.23	35.05	-13.00	-43.28	Vertical




Ant. 5

Part 90R Mode 19

NR SA n14 5M Ch158600 1RB1 BPSK

M

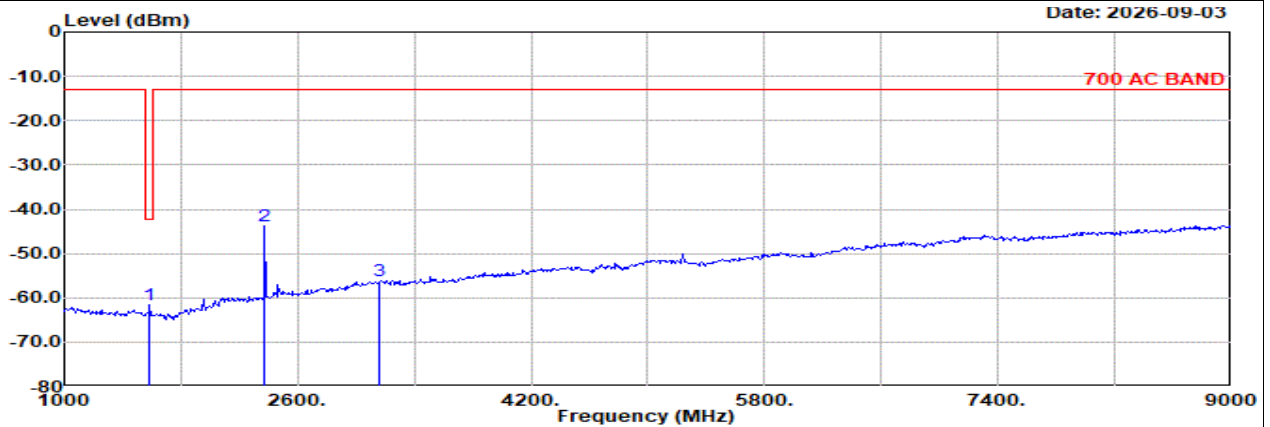


Site : 03CH12-HY

Condition: 700 AC BAND 3m 9120D-01212 Horizontal

NR SA n14 5M Ch158600 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm				dB/m	dB	dB	dB	dB	dB
1	1582.00	-61.62	RMS	25.30	-29.64	0.35	-95.23	37.60	-42.15	-19.47	Horizontal
2	2373.00	-43.83	RMS	27.30	-27.45	0.13	-95.23	51.42	-13.00	-30.83	Horizontal
3	3164.00	-56.24	RMS	30.10	-26.23	0.04	-95.23	35.08	-13.00	-43.24	Horizontal

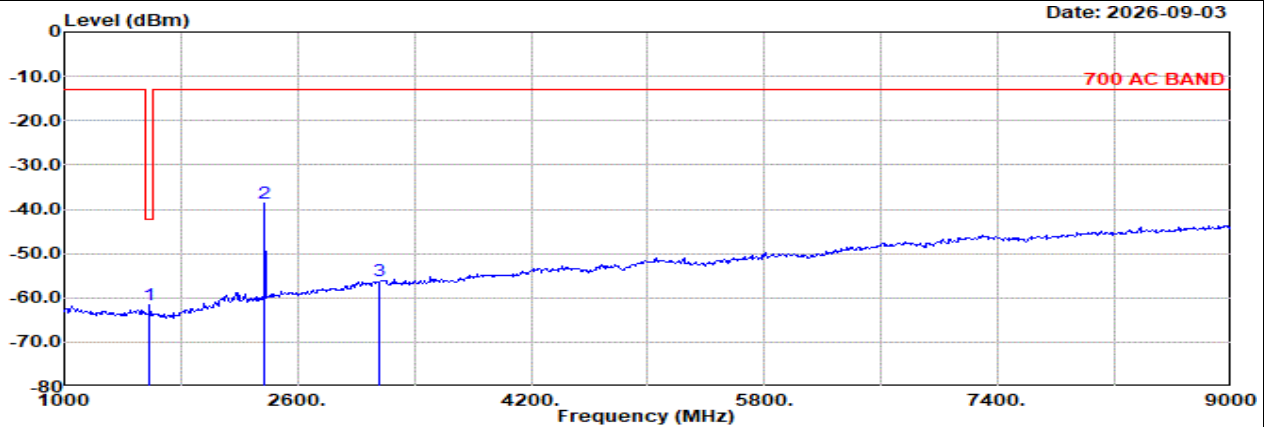

Site : 03CH12-HY

Condition: 700 AC BAND 3m 9120D-01212 Vertical

NR SA n14 5M Ch158600 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm				dB/m	dB	dB	dB	dB	dB
1	1582.00	-61.67	RMS	25.30	-29.64	0.35	-95.23	37.55	-42.15	-19.52	Vertical
2	2373.00	-38.79	RMS	27.30	-27.45	0.13	-95.23	56.46	-13.00	-25.79	Vertical
3	3164.00	-56.17	RMS	30.10	-26.23	0.04	-95.23	35.15	-13.00	-43.17	Vertical




Ant. 5

Part 90R Mode 19

NR SA n14 5M Ch159100 1RB1 BPSK

H

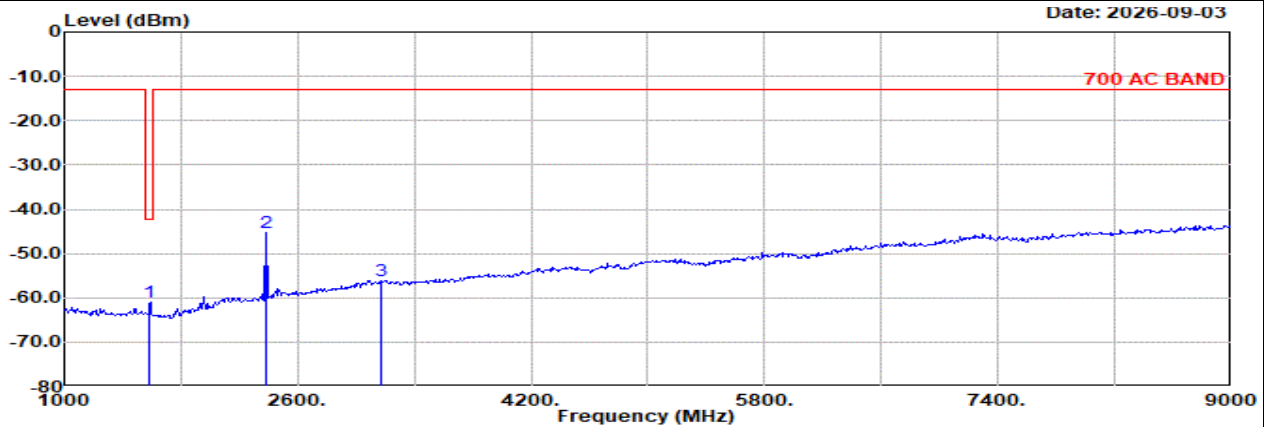


Site : 03CH12-HY

Condition: 700 AC BAND 3m 9120D-01212 Horizontal

: NR SA n14 5M Ch159100 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	1587.00	-61.03	RMS	25.30	-29.63	0.35	-95.23	38.18	-42.15	-18.88	Horizontal
2	2380.00	-45.41	RMS	27.30	-27.43	0.12	-95.23	49.83	-13.00	-32.41	Horizontal
3	3174.00	-56.20	RMS	30.10	-26.21	0.04	-95.23	35.10	-13.00	-43.20	Horizontal

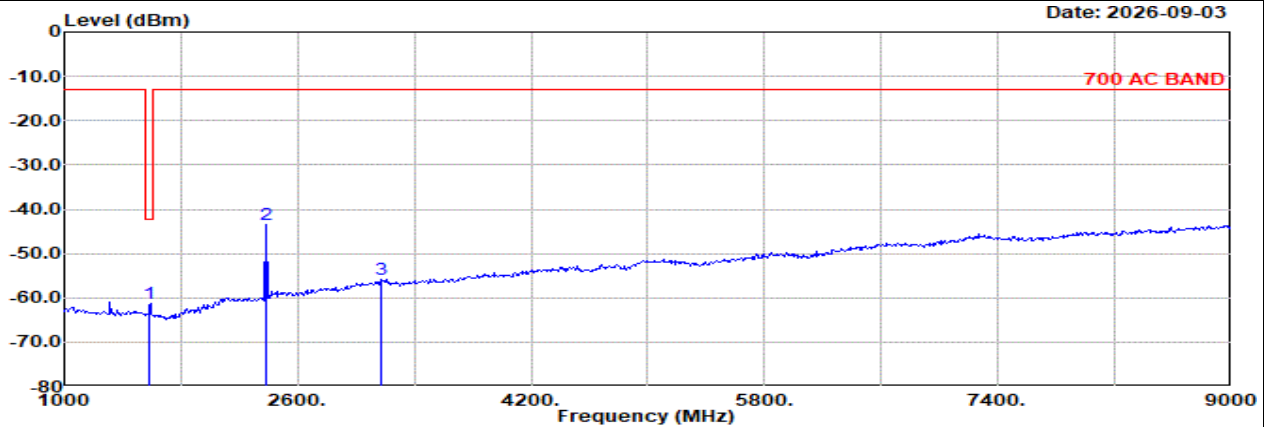

Site : 03CH12-HY

Condition: 700 AC BAND 3m 9120D-01212 Vertical

: NR SA n14 5M Ch159100 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	1587.00	-61.33	RMS	25.30	-29.63	0.35	-95.23	37.88	-42.15	-19.18	Vertical
2	2380.00	-43.61	RMS	27.30	-27.43	0.12	-95.23	51.63	-13.00	-30.61	Vertical
3	3174.00	-55.78	RMS	30.10	-26.21	0.04	-95.23	35.52	-13.00	-42.78	Vertical




Ant. 5

Part 90R Mode 20

NR SA n14 10M Ch158600 1RB1 BPSK

M

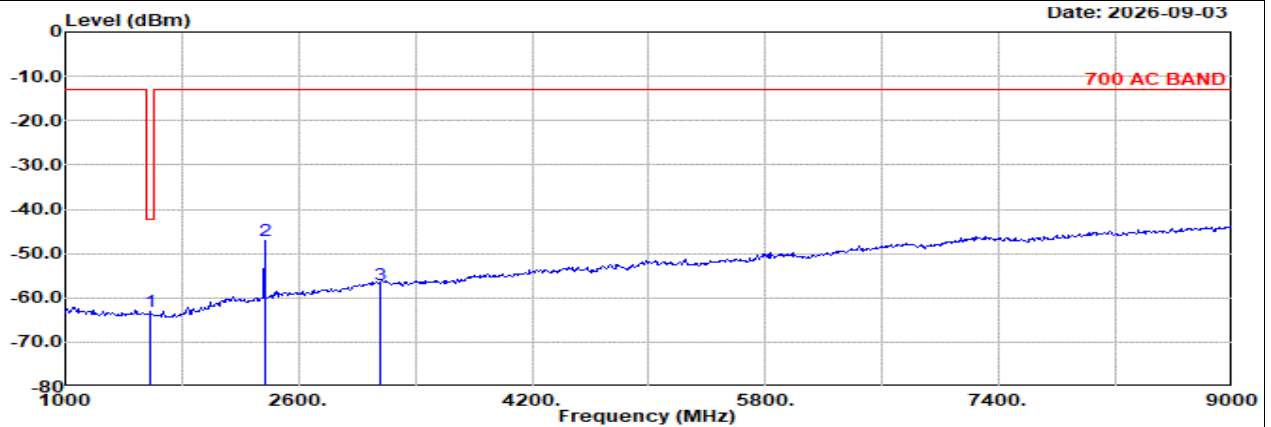


Site : 03CH12-HY

Condition: 700 AC BAND 3m 9120D-01212 Horizontal

: NR SA n14 10M Ch158600 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm								dB	
1	1577.00	-63.15	RMS	25.30	-29.66	0.34	-95.23	36.10	-42.15	-21.00	Horizontal
2	2366.00	-46.99	RMS	27.30	-27.47	0.14	-95.23	48.27	-13.00	-33.99	Horizontal
3	3155.00	-56.91	RMS	30.10	-26.24	0.04	-95.23	34.42	-13.00	-43.91	Horizontal

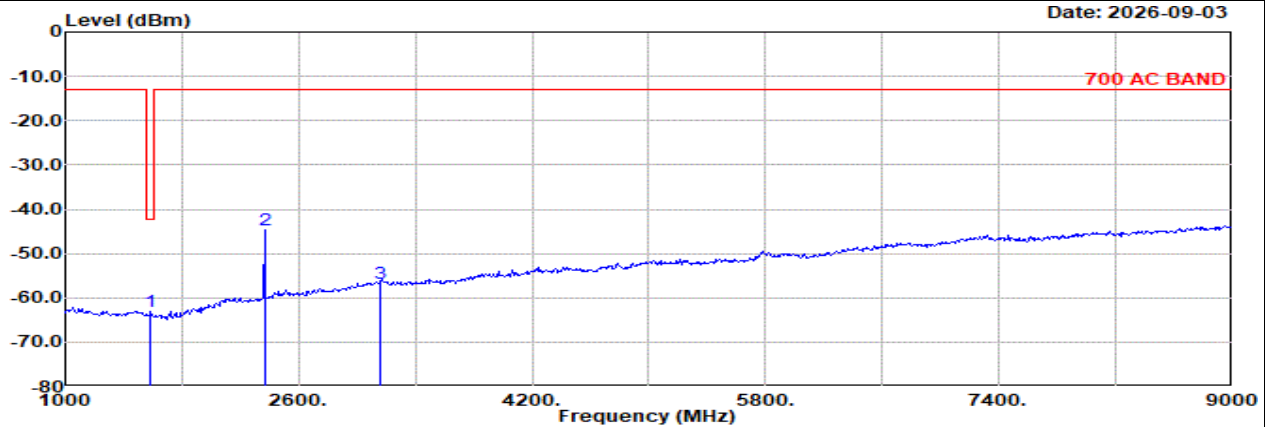

Site : 03CH12-HY

Condition: 700 AC BAND 3m 9120D-01212 Vertical

: NR SA n14 10M Ch158600 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm								dB	
1	1577.00	-63.05	RMS	25.30	-29.66	0.34	-95.23	36.20	-42.15	-20.90	Vertical
2	2366.00	-44.77	RMS	27.30	-27.47	0.14	-95.23	50.49	-13.00	-31.77	Vertical
3	3155.00	-56.71	RMS	30.10	-26.24	0.04	-95.23	34.62	-13.00	-43.71	Vertical




Ant. 5

Part 90R Mode 19

NR SA n14 5M Ch159100 1RB1 BPSK

H

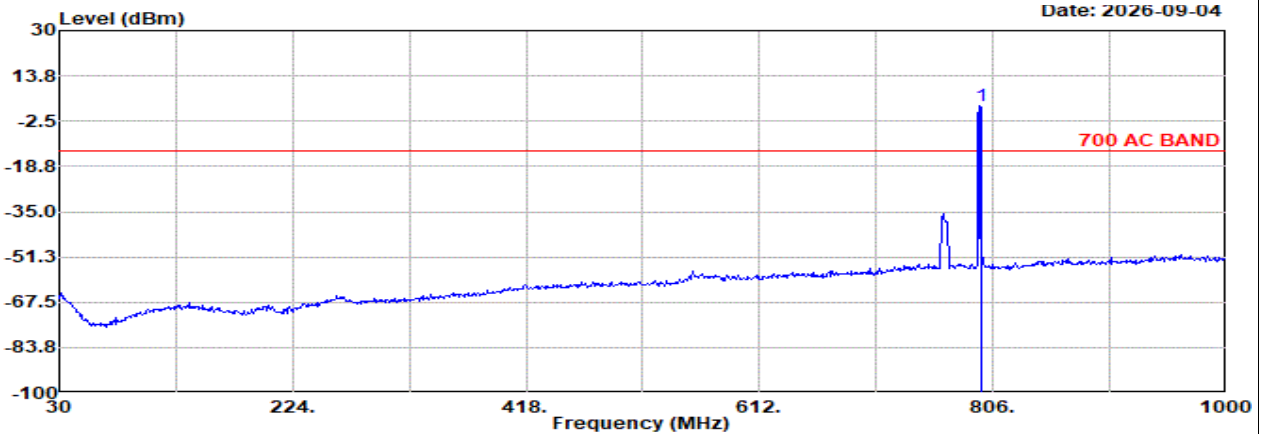


Site : 03CH12-HY

Condition: 700 AC BAND 3m Bilog_37059 & 01_251126 Horizontal

: NR SA n14 5M Ch159100 1RB1 BPSK

: #1 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1		g			
	MHz	dBm		dB/m	dB	dB	dBuV	dBm	dB	
1	796.00	3.07	RMS	28.22	3.82	0.00	-95.23	66.26	-13.00	16.07 Horizontal

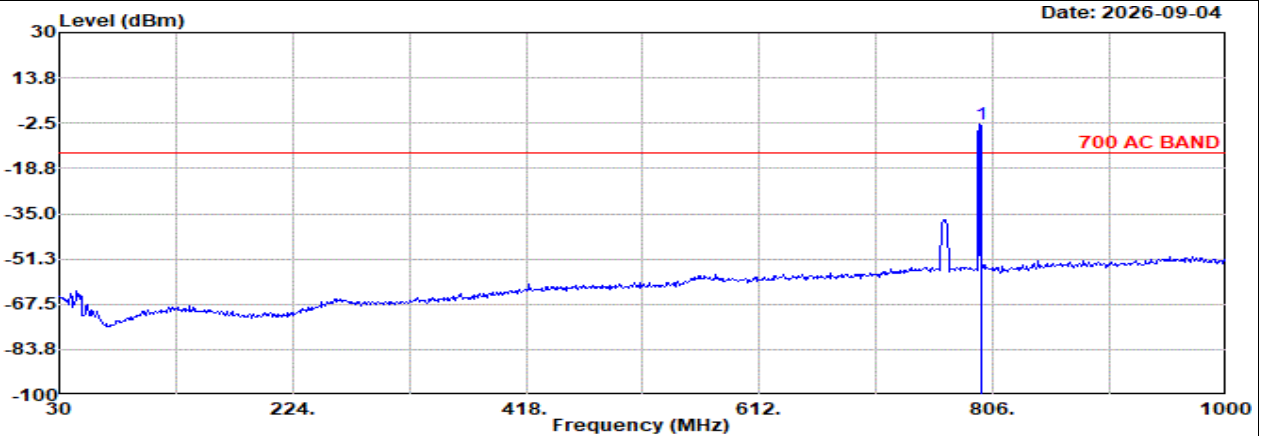

Site : 03CH12-HY

Condition: 700 AC BAND 3m Bilog_37059 & 01_251126 Vertical

: NR SA n14 5M Ch159100 1RB1 BPSK

: #1 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1		g			
	MHz	dBm		dB/m	dB	dB	dBuV	dBm	dB	
1	796.00	-2.74	RMS	28.22	3.82	0.00	-95.23	60.45	-13.00	10.26 Vertical