


Appendix B

Peak Output Power




Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
25 dBm	-0.08 dBm	VBW	1 MHz		
	2.40217034 GHz	SWT	5 ms	Unit	dBm

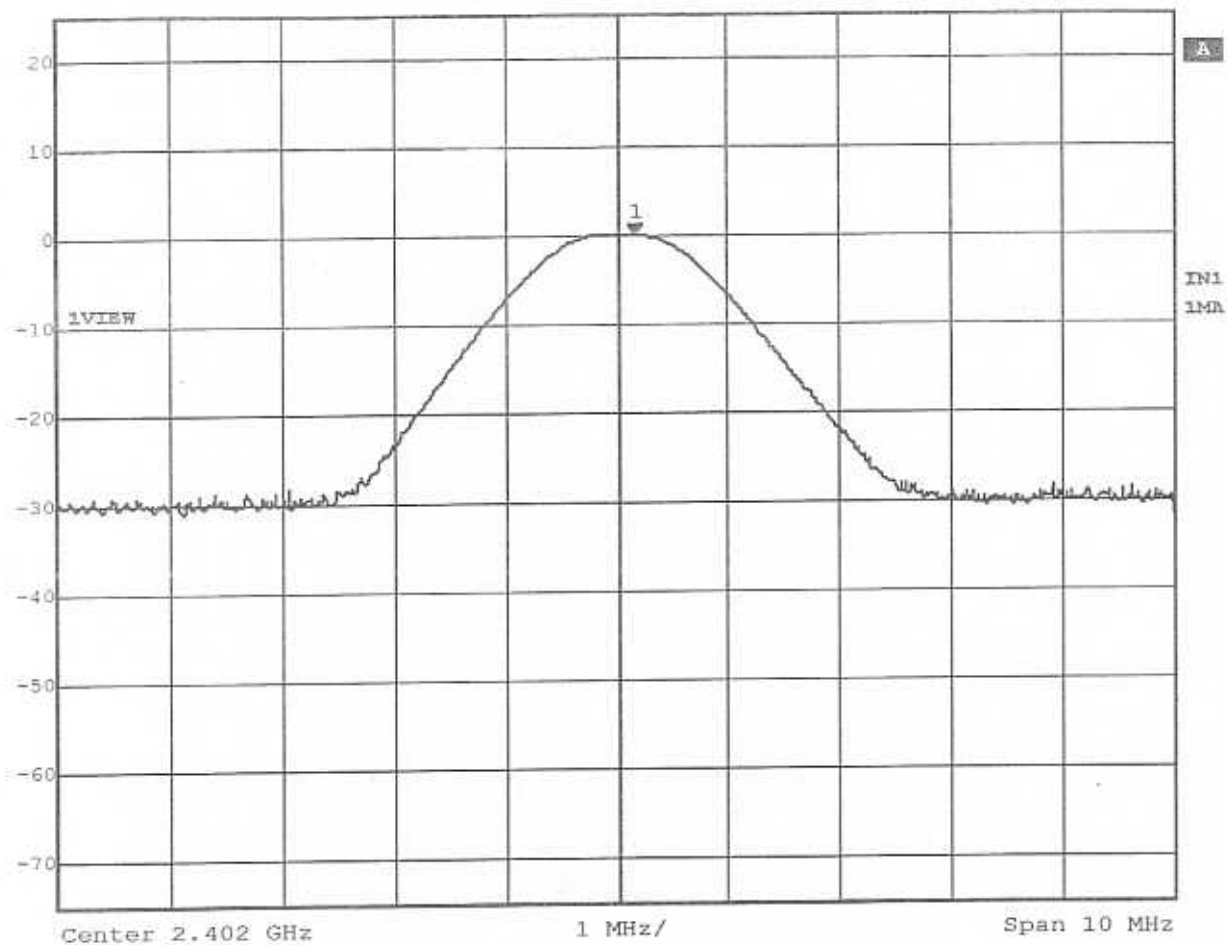

Title: Peak Output Power Ch.: 0
Comment A: GN Netcom A/S
Jabra FreeSpeak Bluetooth Wireless Headset BT200
Date: 22.AUG.2002 08:50:49




Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
25 dBm	0.52 dBm	VBW	1 MHz		
	2.44086974 GHz	SWT	5 ms	Unit	dBm

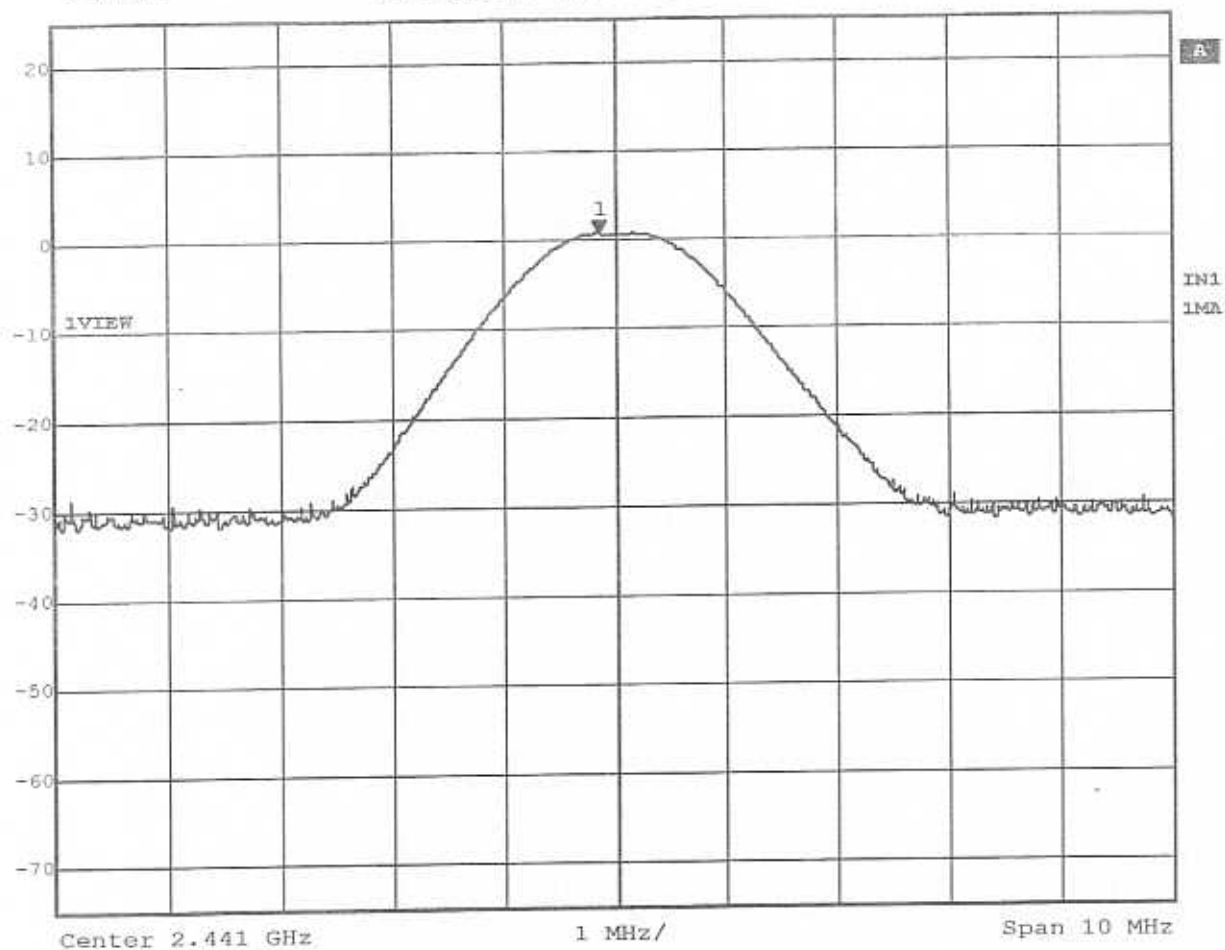

Title: Peak Output Power Ch.: 39
Comment A: GN Netcom A/S
Jabra FreeSpeak Bluetooth Wireless Headset BT200
Date: 22.AUG.2002 08:55:09




Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RE ATT	50 dB
25 dBm	0.86 dBm	VBW	1 MHz		
	2.48019038 GHz	SWT	5 ms	Unit	dBm

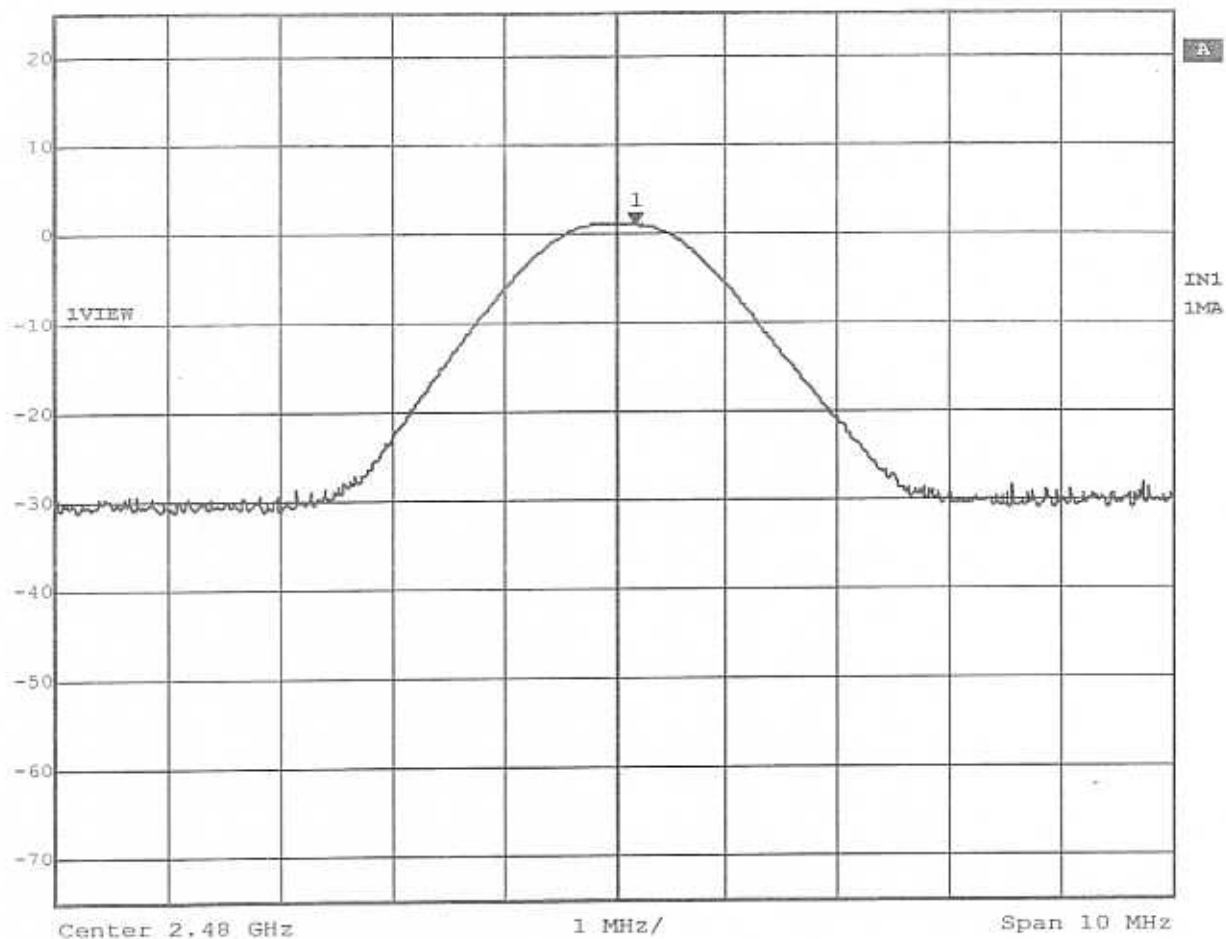

Title: Peak Output Power Ch.: 78
Comment A: GN Netcom A/S
Jabra FreeSpeak Bluetooth Wireless Headset BT200
Date: 22.AUG.2002 08:58:33


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2402 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -4.82dBm, RBW: 5MHz

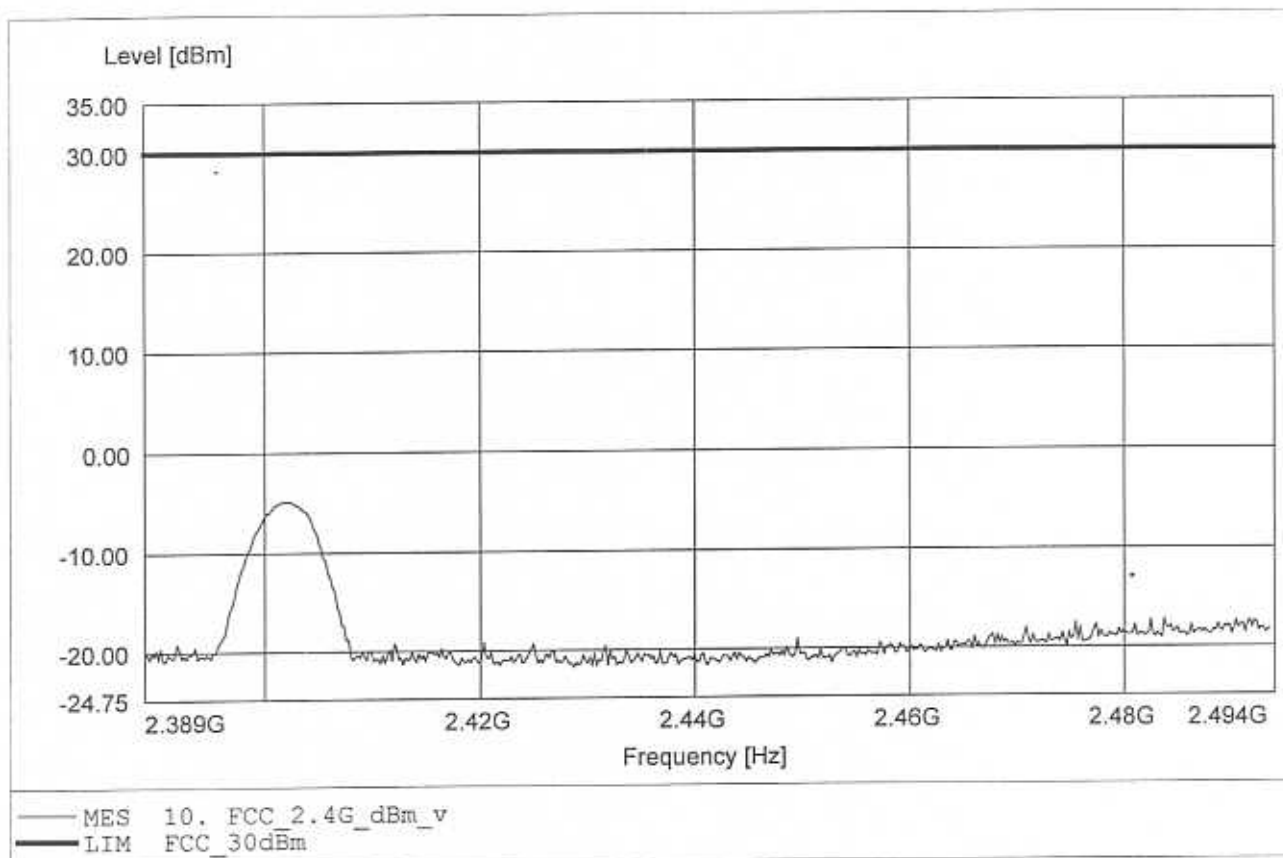


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2402 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom: 23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F. Schulz
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -2.61dBm, RBW: 5MHz

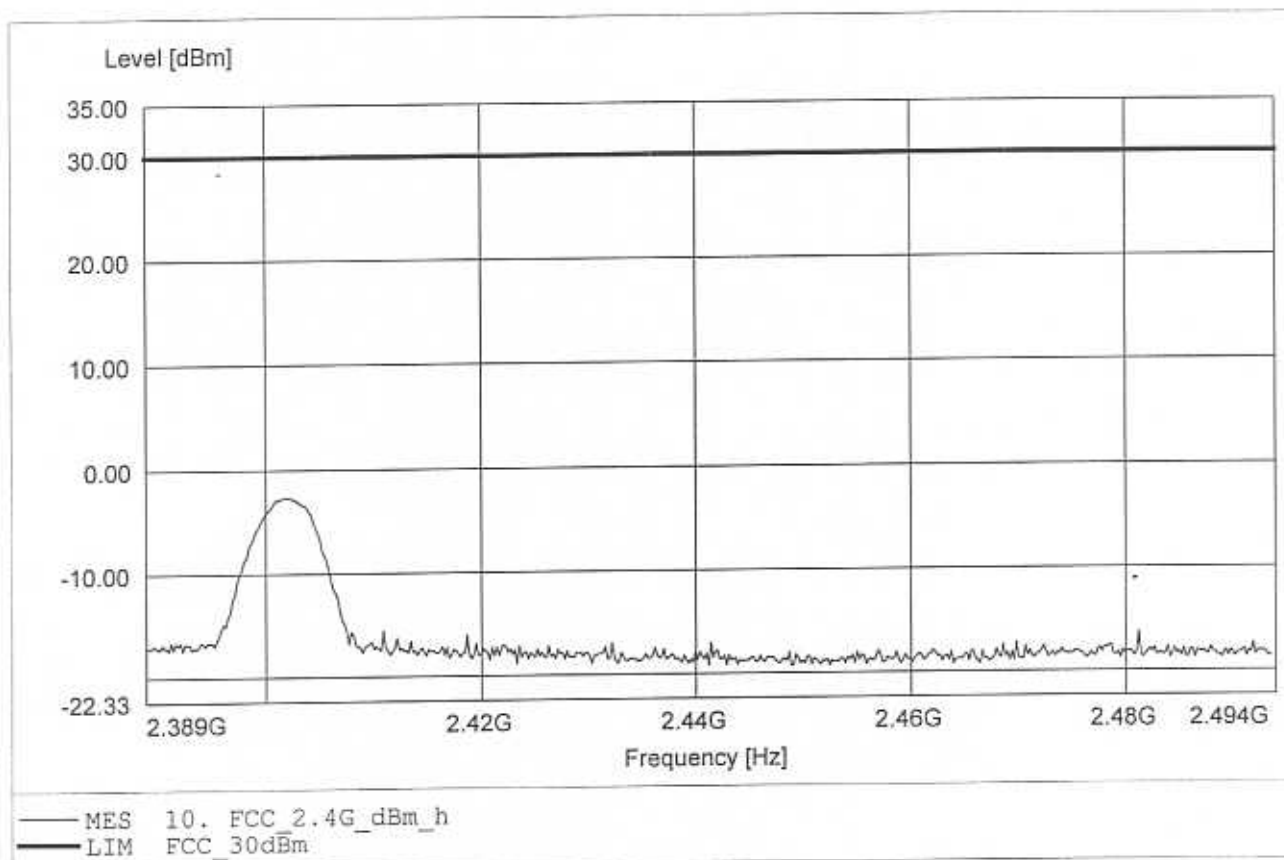


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2441 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -2.52dBm, RBW: 5MHz

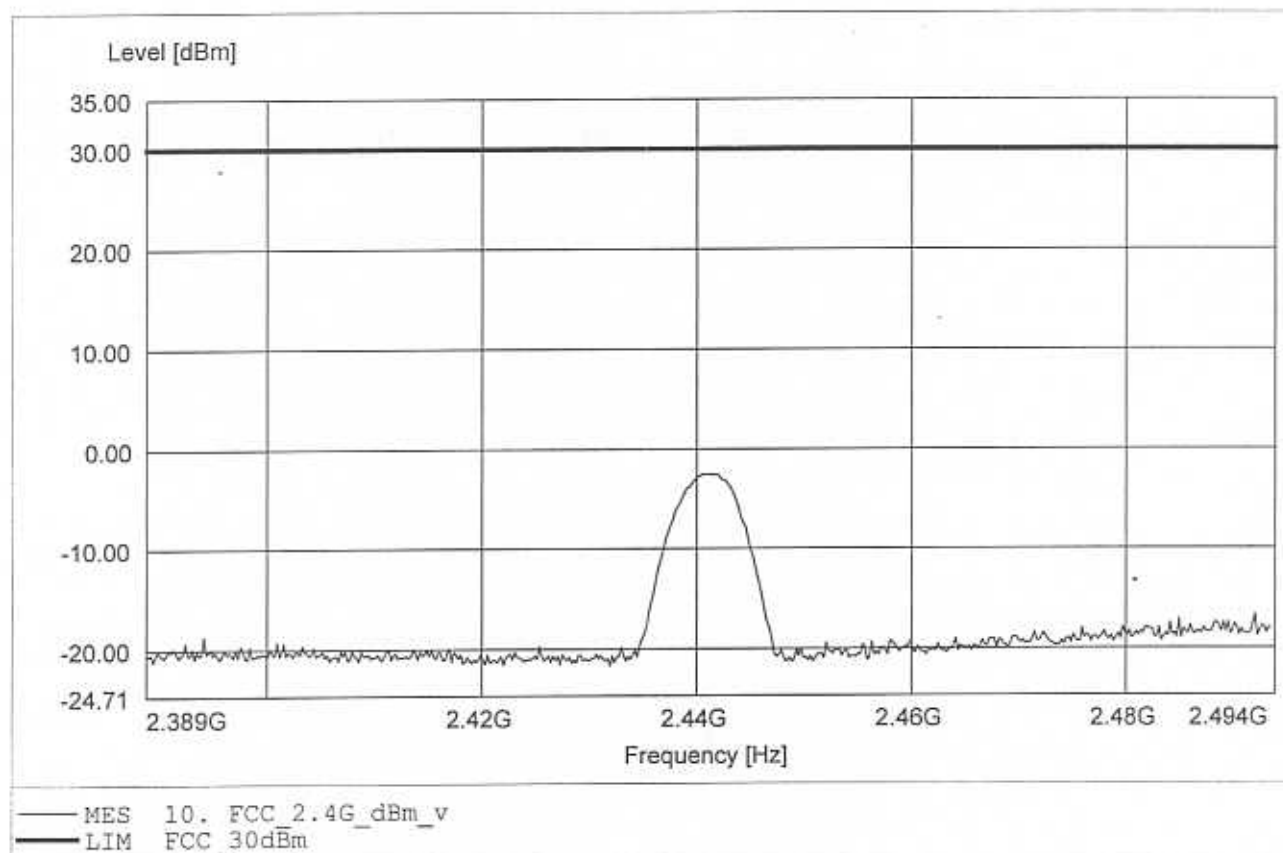


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2441 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom: 23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F. Schulz
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: -4.65dBm, RBW: 5MHz

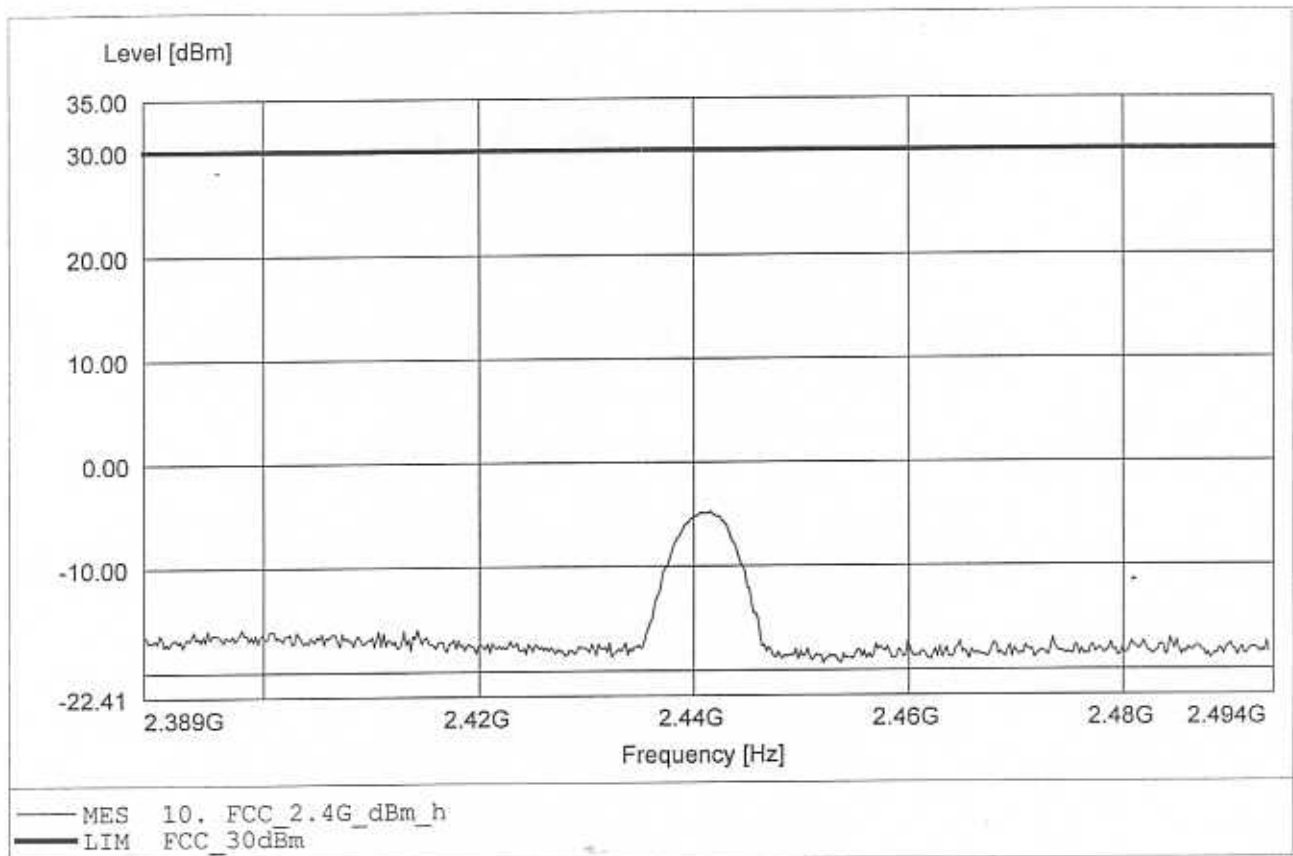


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2480 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -1.00dBm, RBW: 5MHz

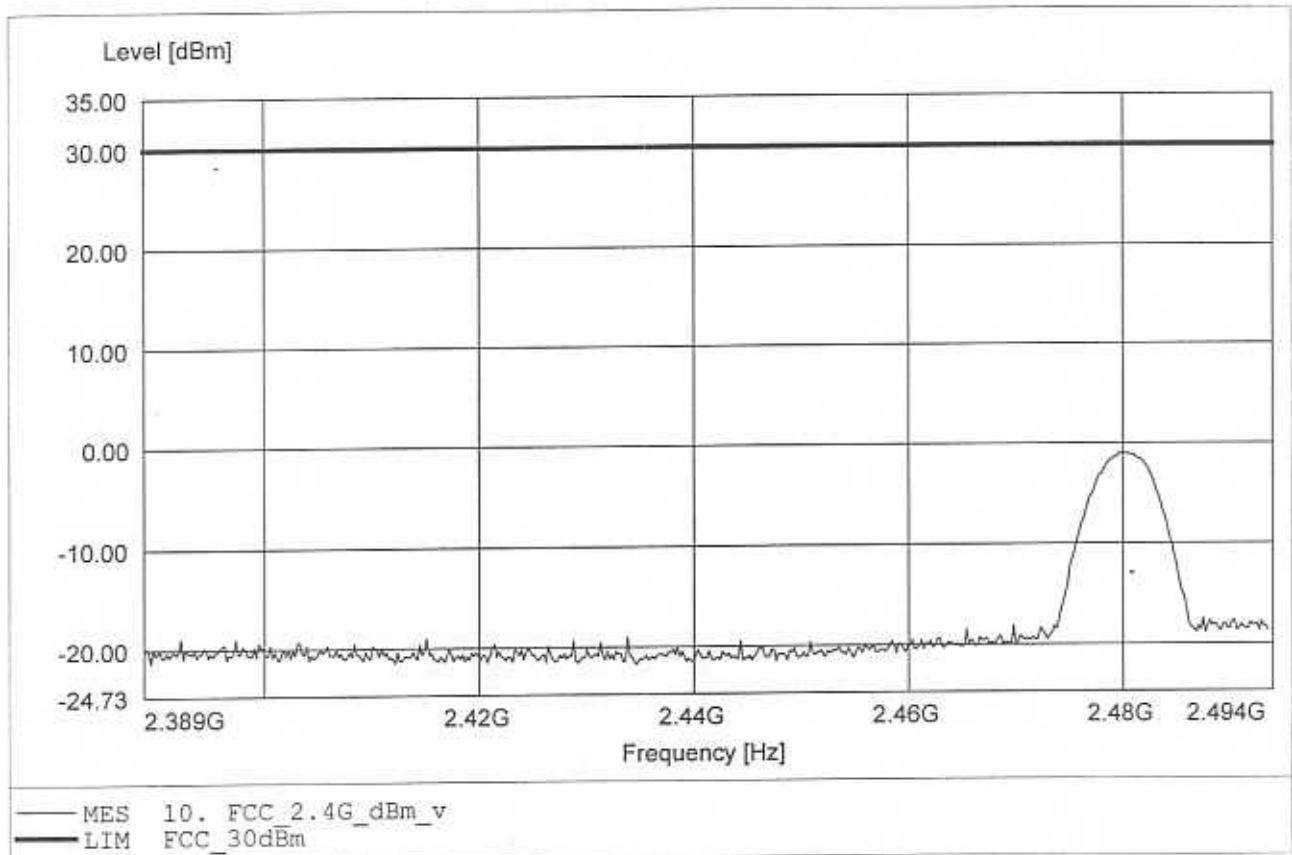

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2480 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -4.05dBm, RBW: 5MHz

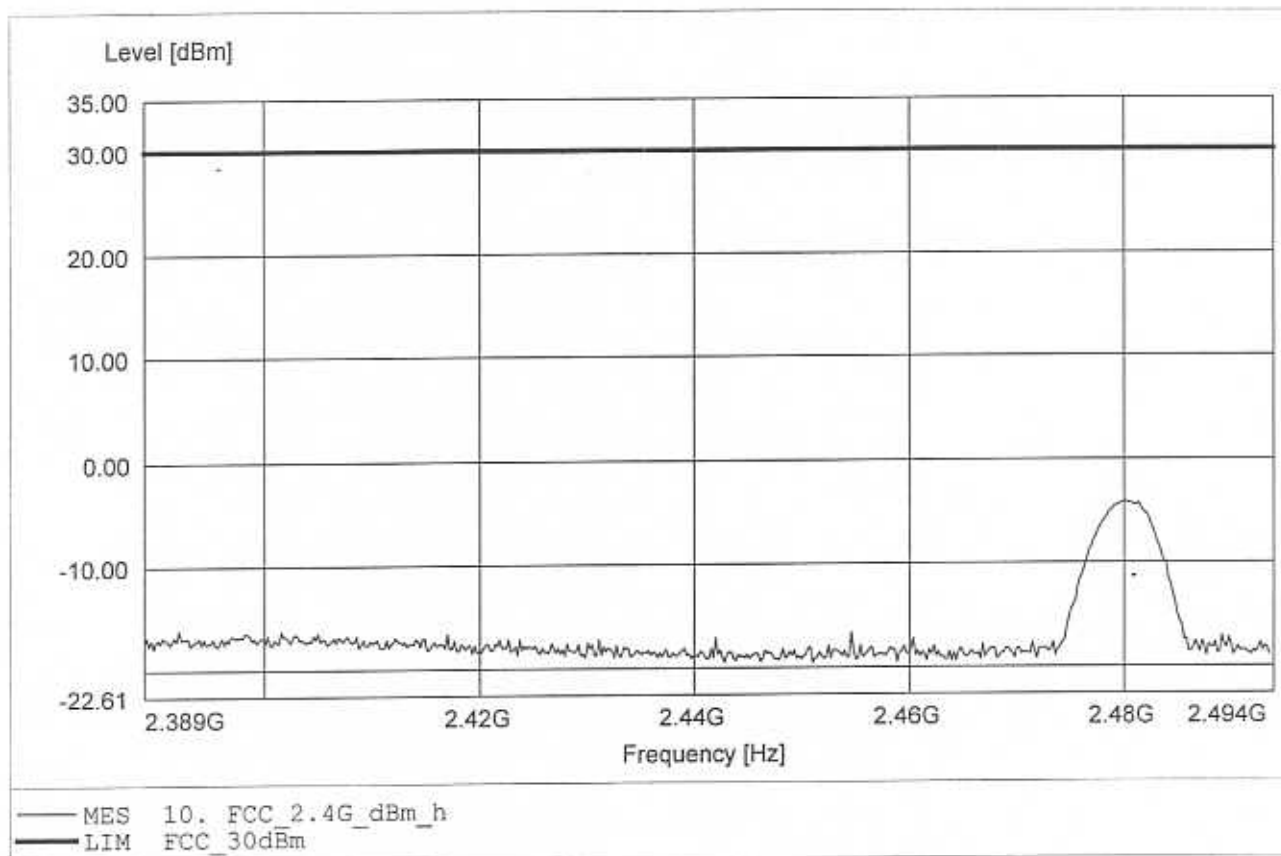


Appendix C

Spurious Emissions radiated - Transmitter operating


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2402 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 151.623MHz, Emax: 31.88dBµV/m, RBW: 100kHz

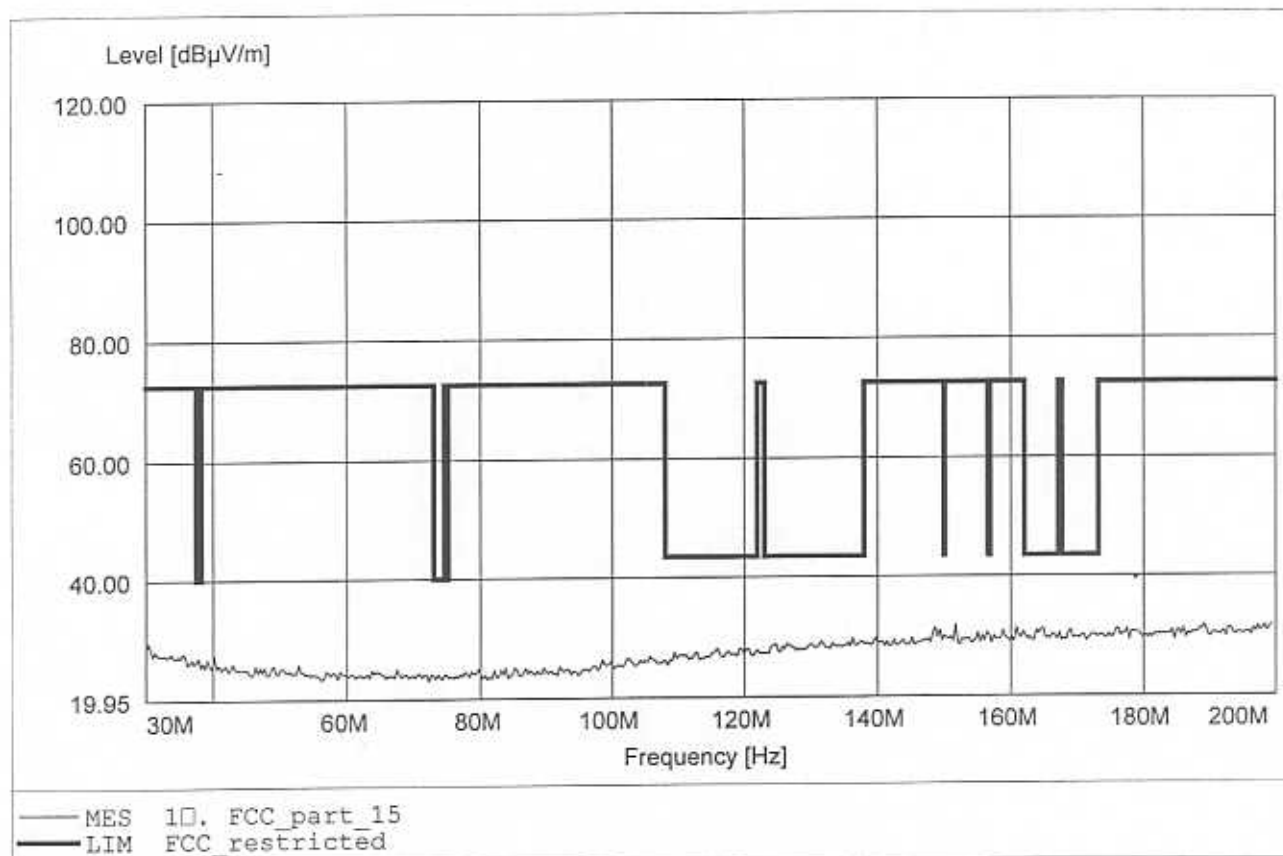


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2402 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 175.130MHz, Emax: 31.94dBµV/m, RBW: 100kHz

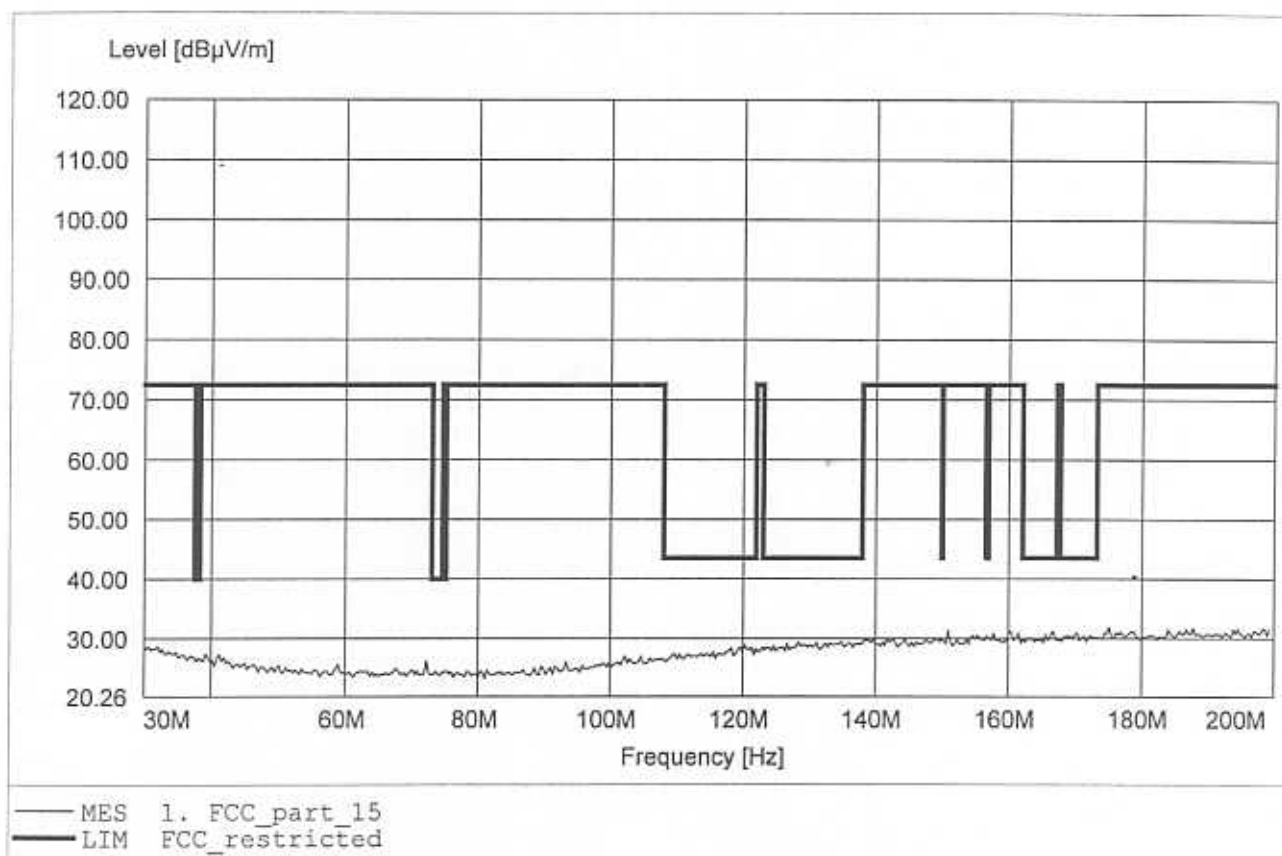


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2402 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 982.365MHz, Emax: 23.68dBµV/m, RBW: 100kHz

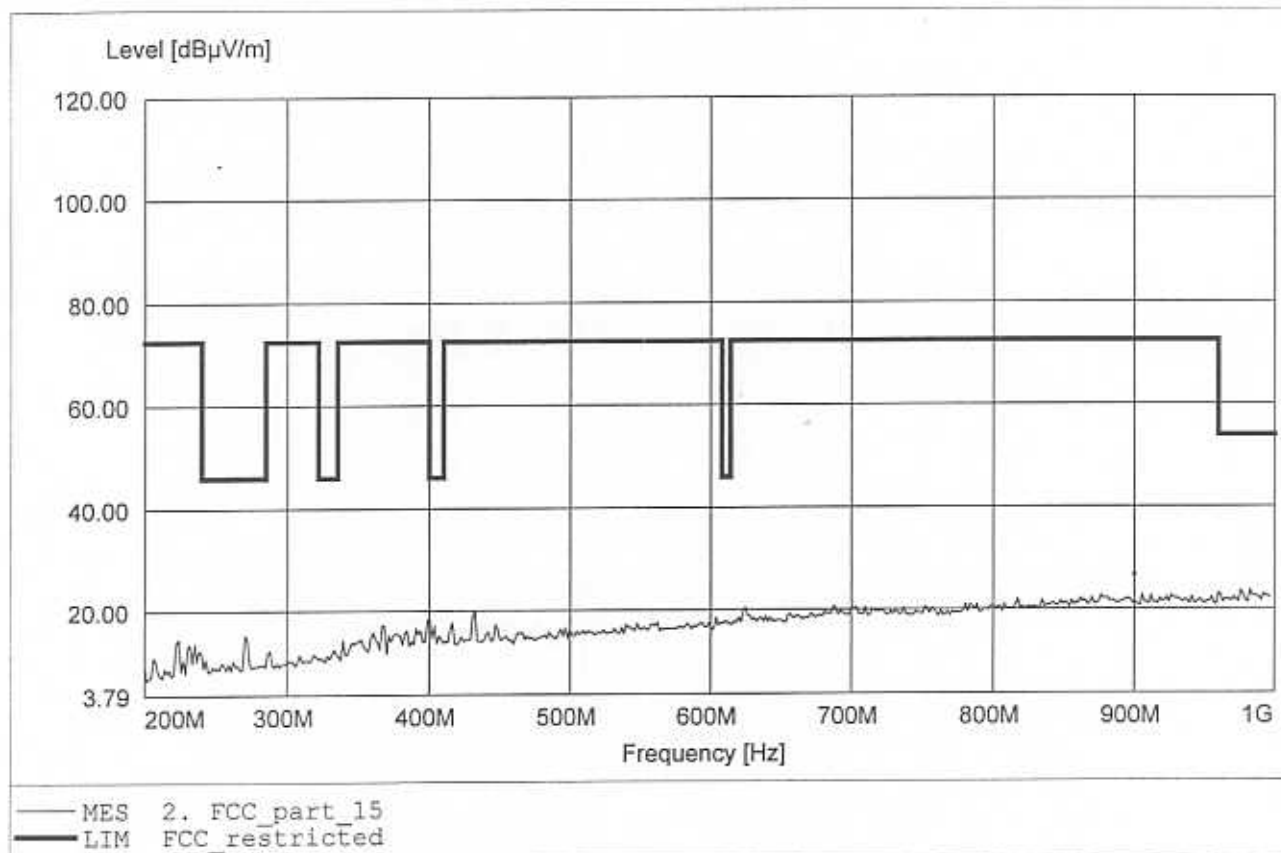


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2402 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 890.982MHz, Emax: 37.41dBµV/m, RBW: 100kHz

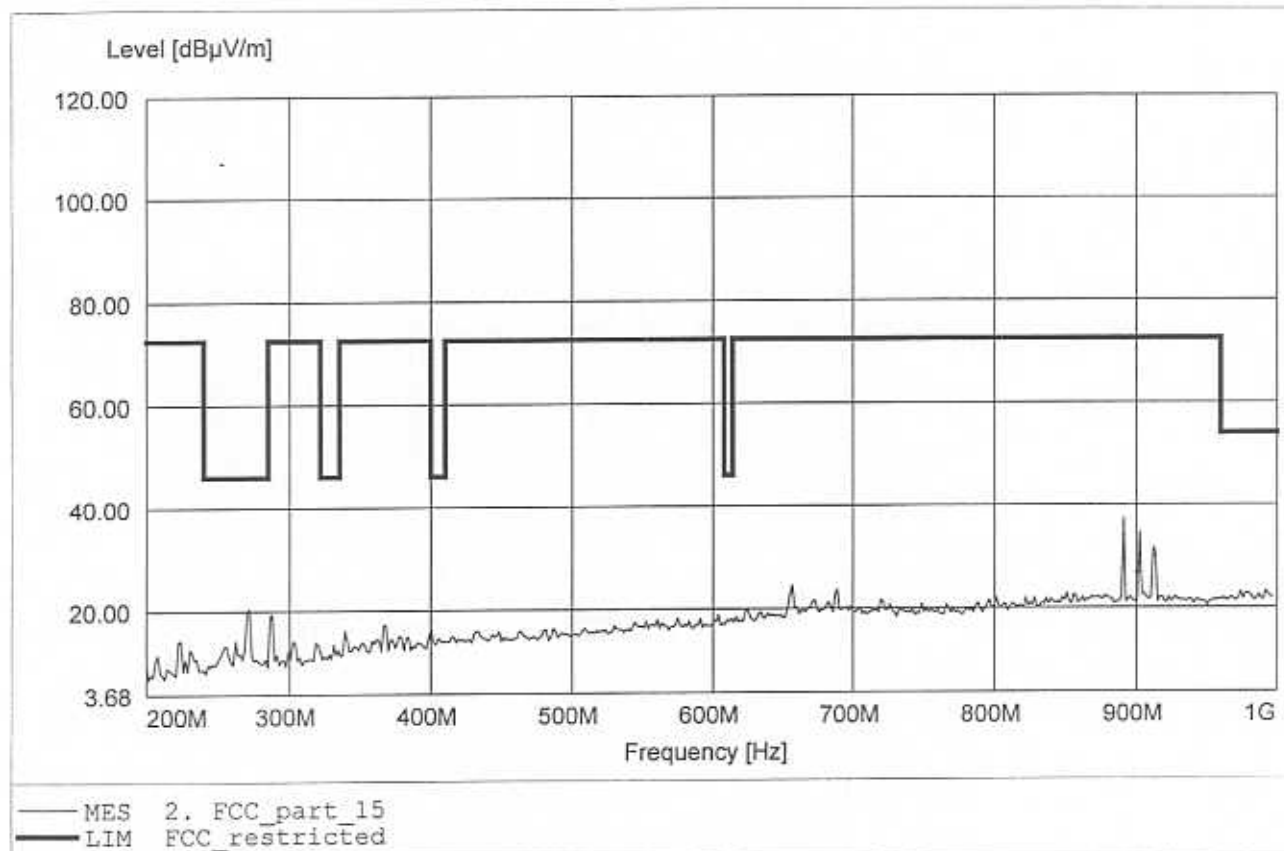


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2402 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 66.11dBuV/m, RBW: 1MHz

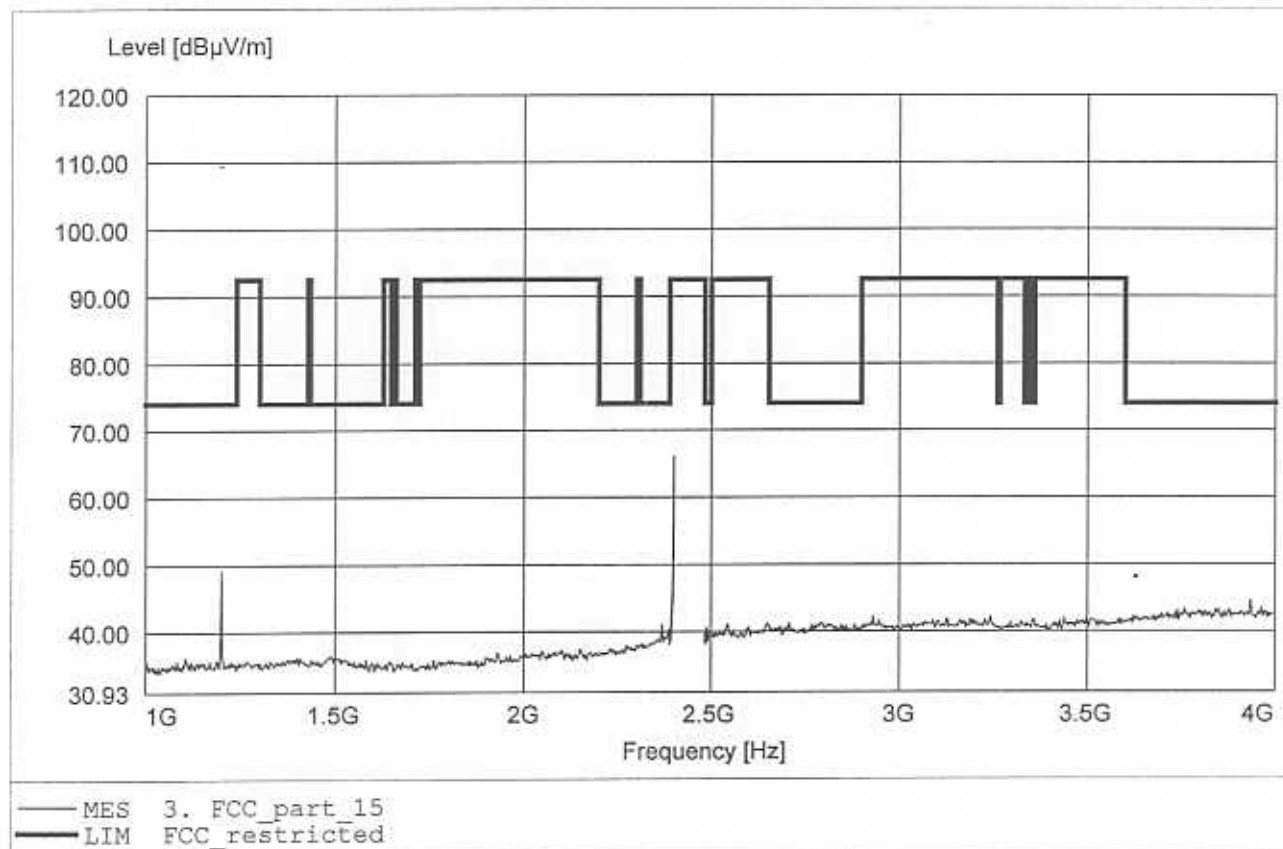


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2402 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 63.92dBμV/m, RBW: 1MHz

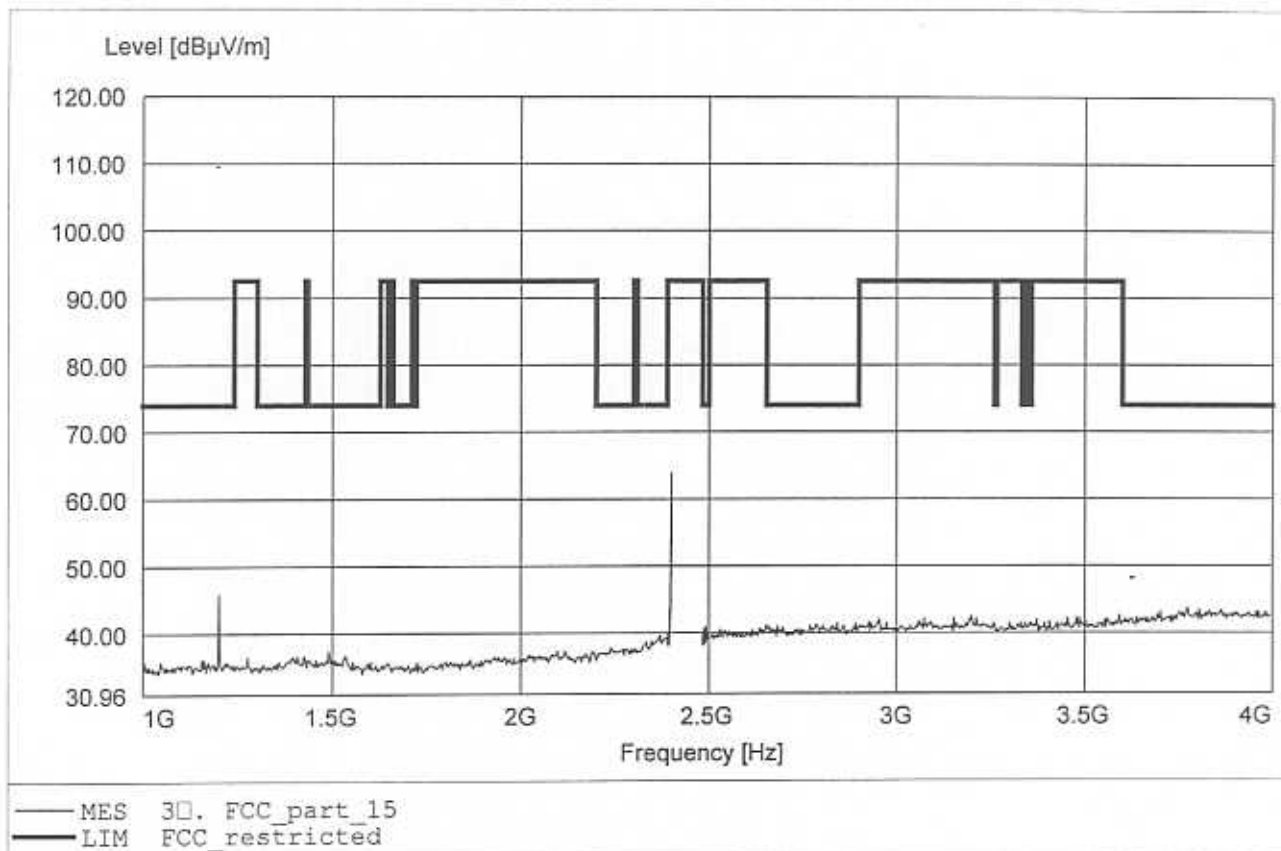


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2402 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 66.11dBµV/m, RBW: 1MHz

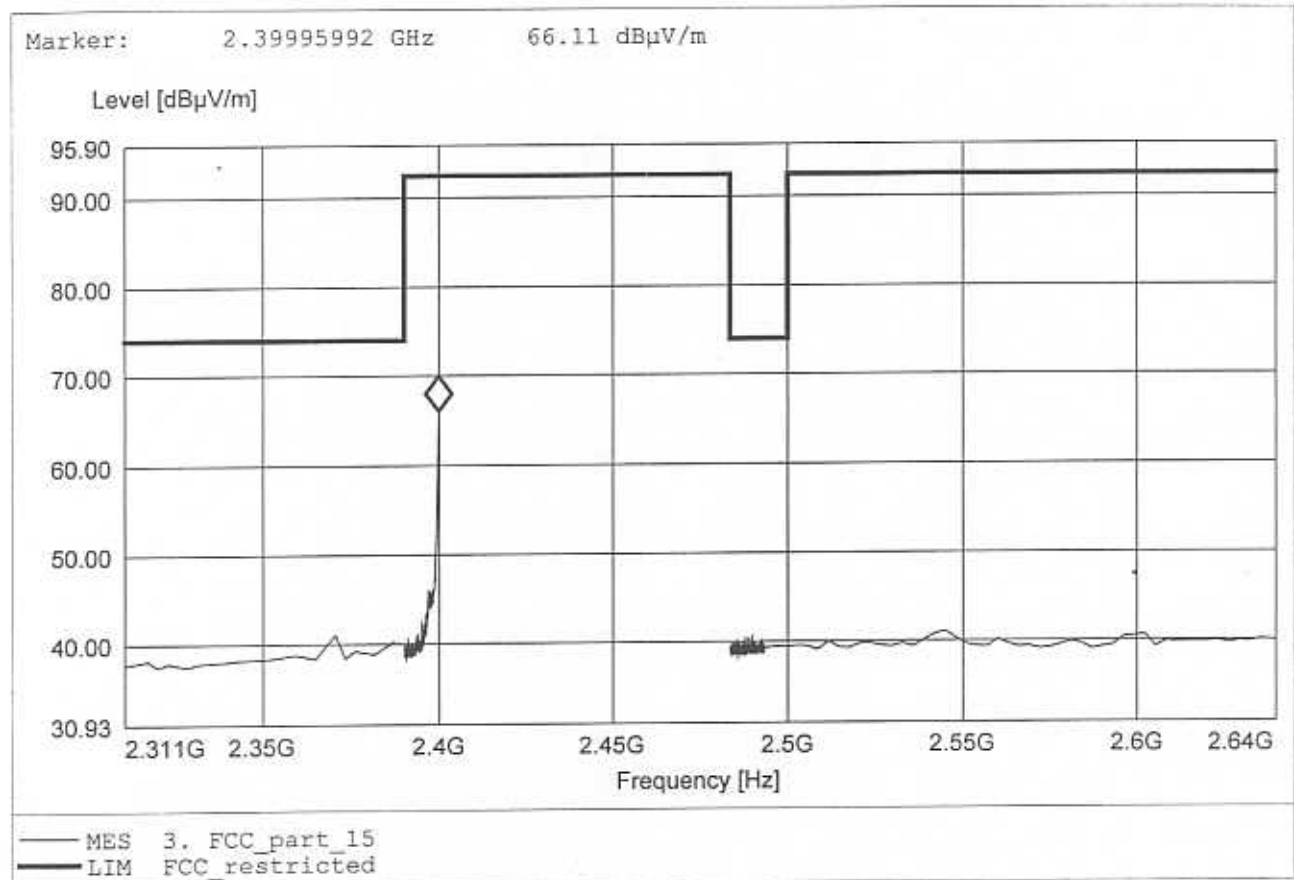


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2402 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 63.92dBµV/m, RBW: 1MHz

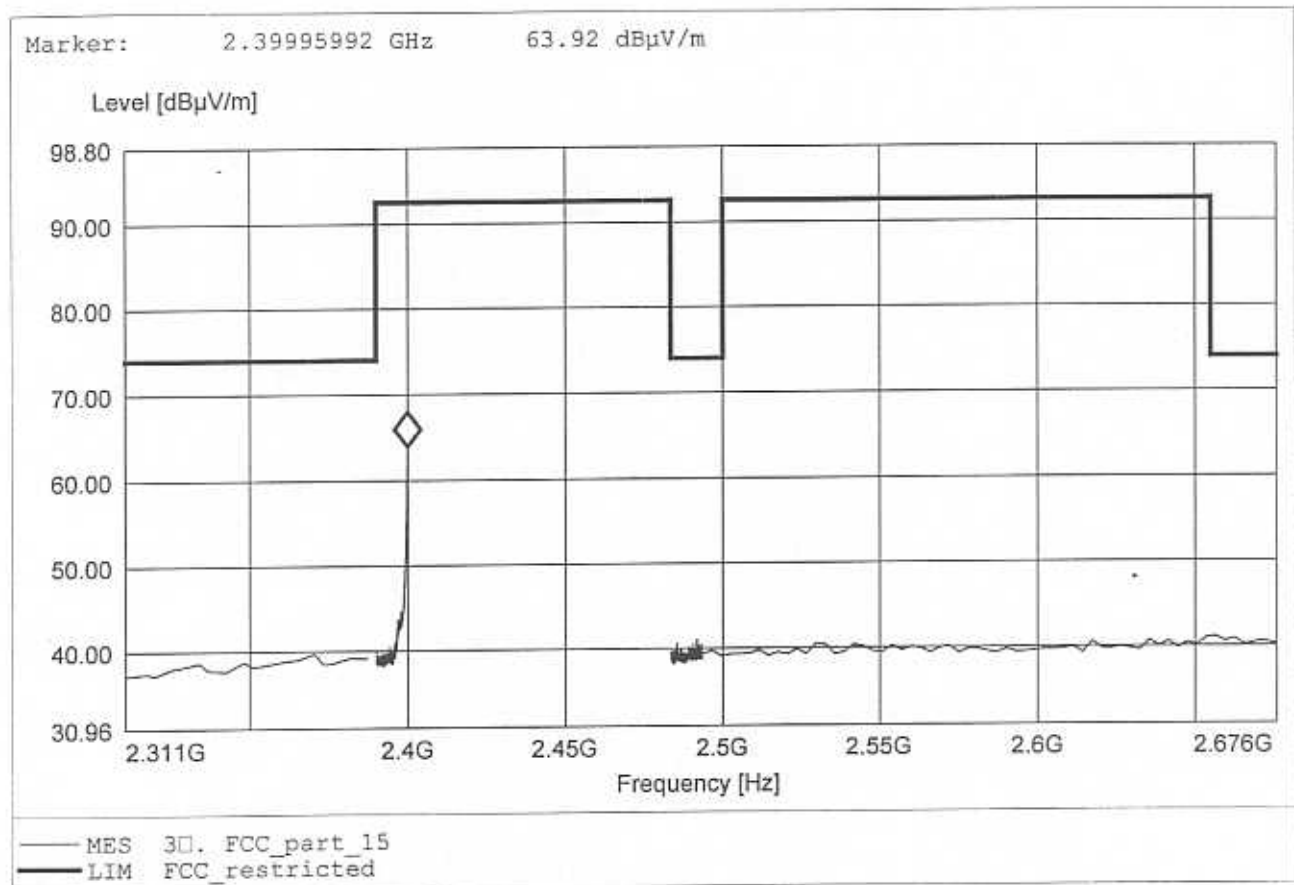


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2402 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 45.52dBµV/m, RBW: 1MHz

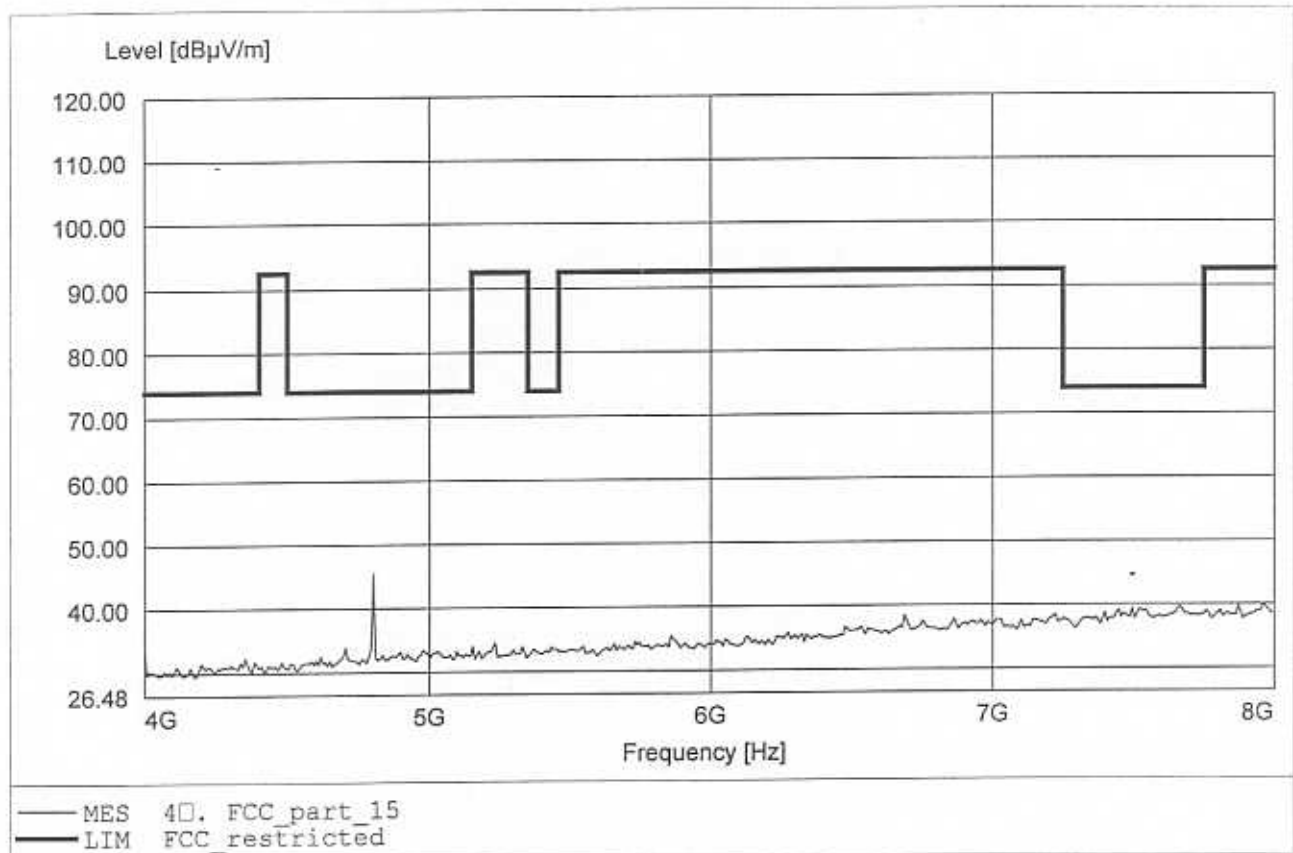


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2402 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.752GHz, Emax: 39.67dBµV/m, RBW: 1MHz

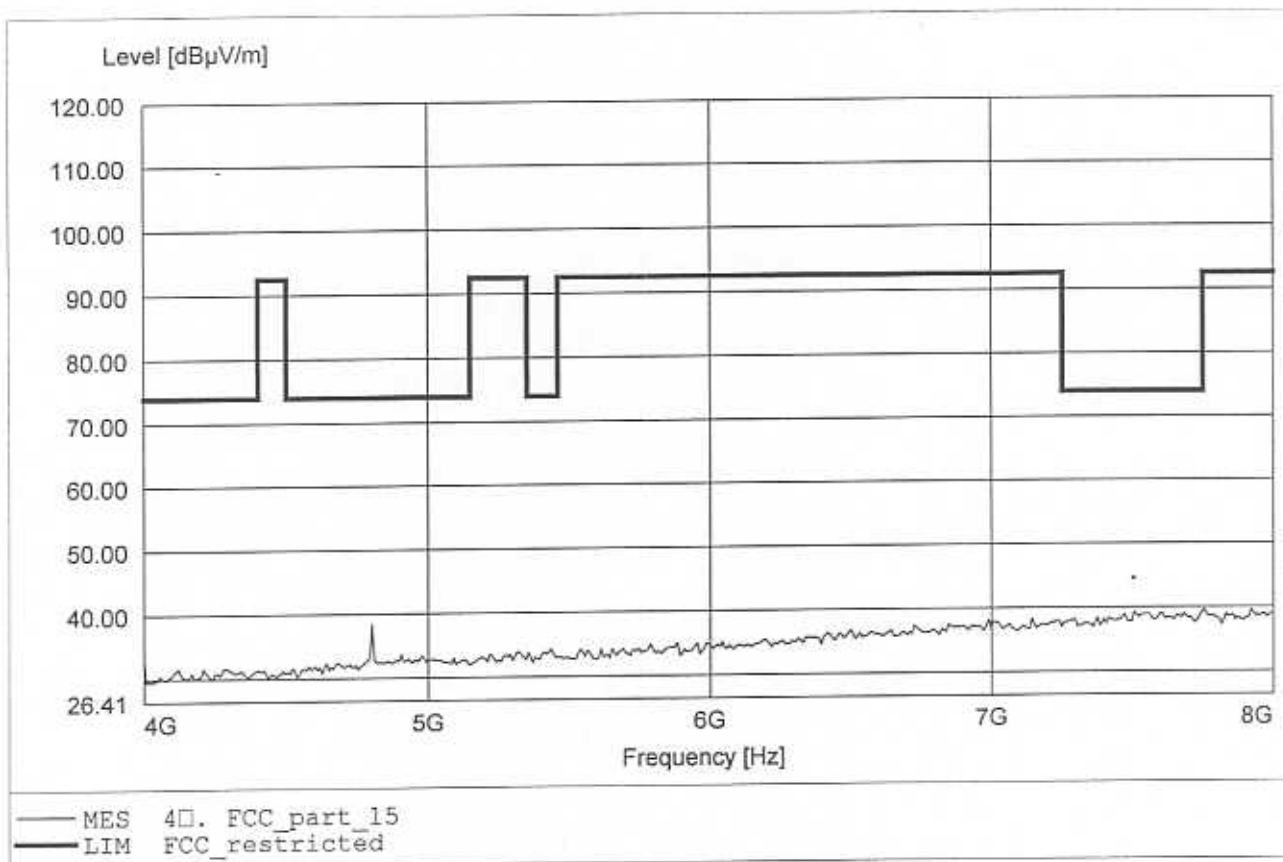


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2402 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to S15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 11.054GHz, Emax: 44.03dBuV/m, RBW: 1MHz

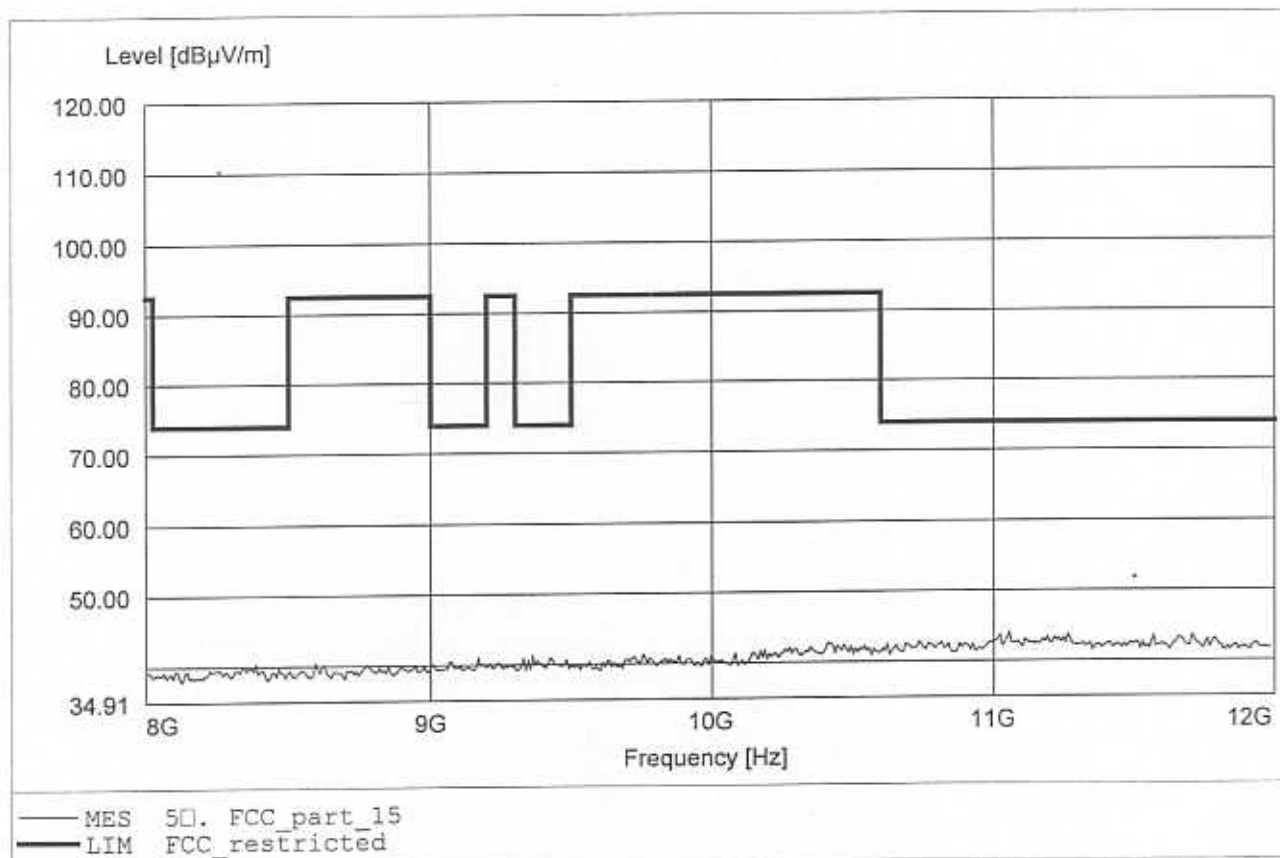


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2402 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom: 23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F. Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 10.998GHz, Emax: 44.39dBμV/m, RBW: 1MHz

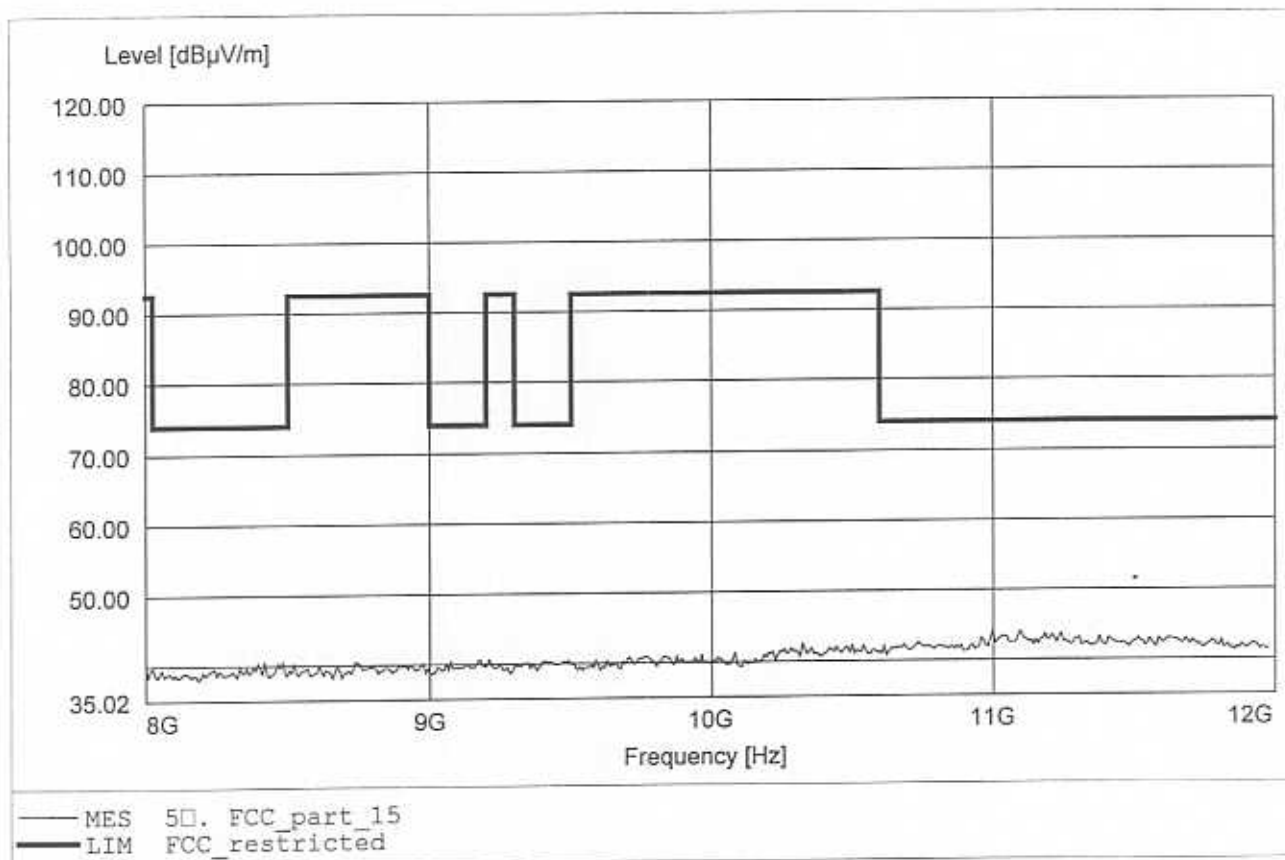


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2402 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.946GHz, Emax: 46.42dBµV/m, RBW: 1MHz

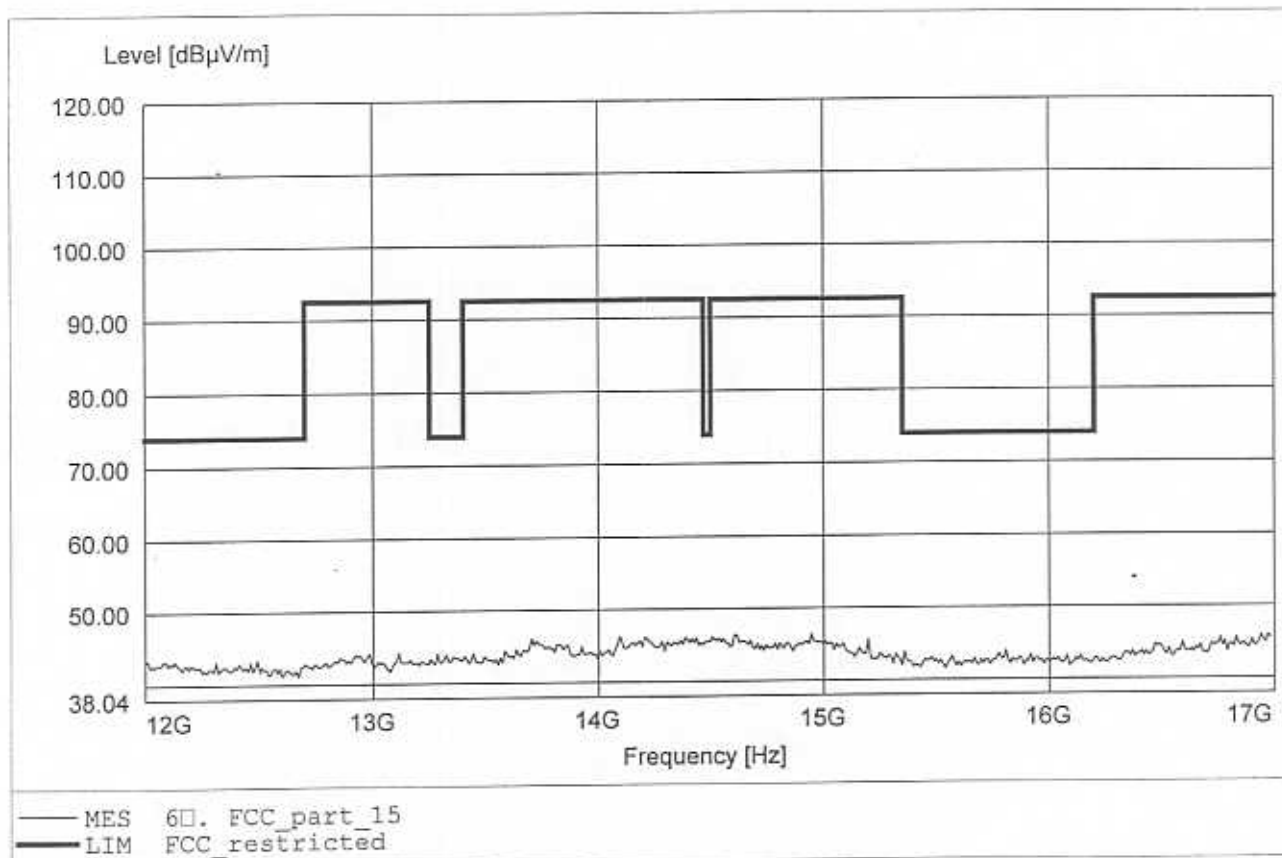


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2402 MHZ
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.104GHz, Emax: 46.61dBµV/m, RBW: 1MHz

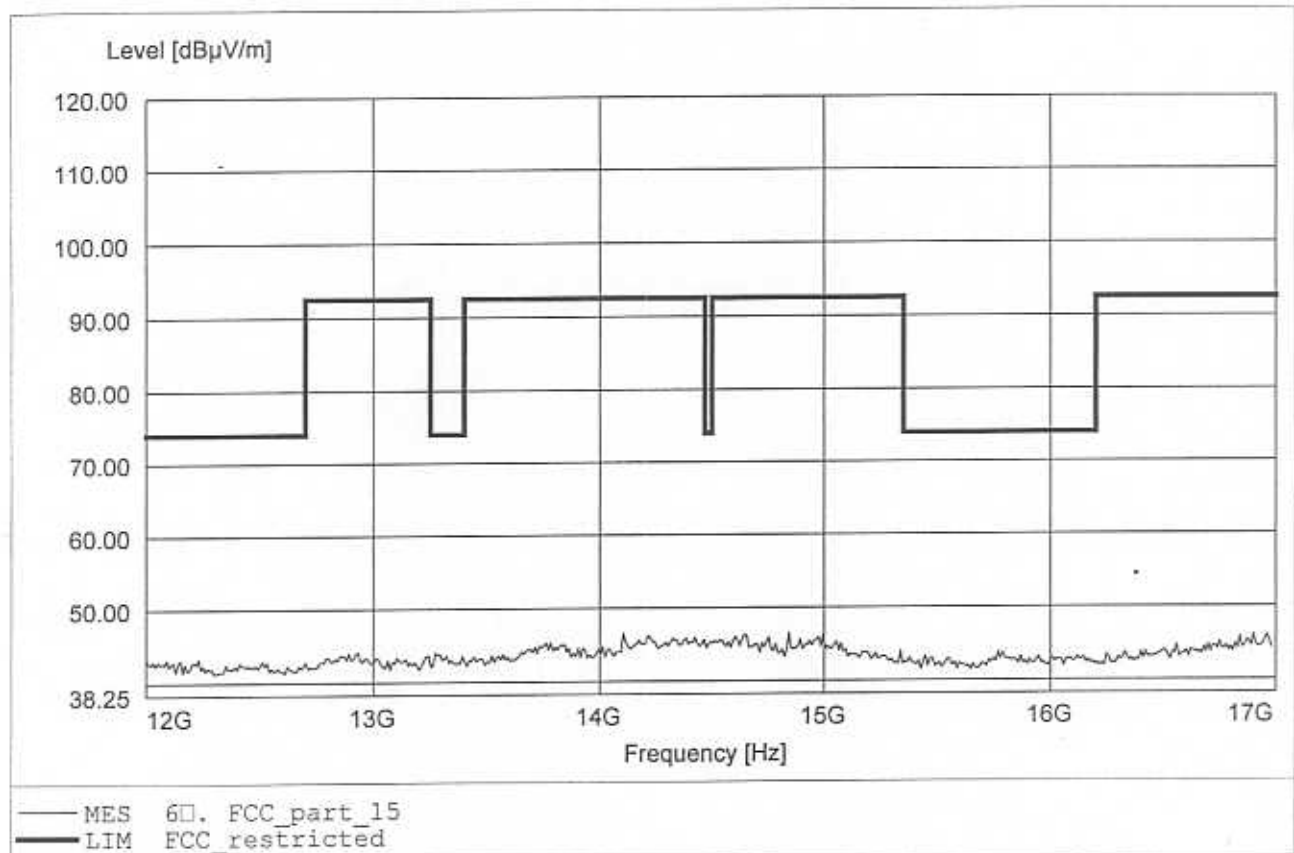


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2402 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.076GHz, Emax: 48.02dBμV/m, RBW: 1MHz

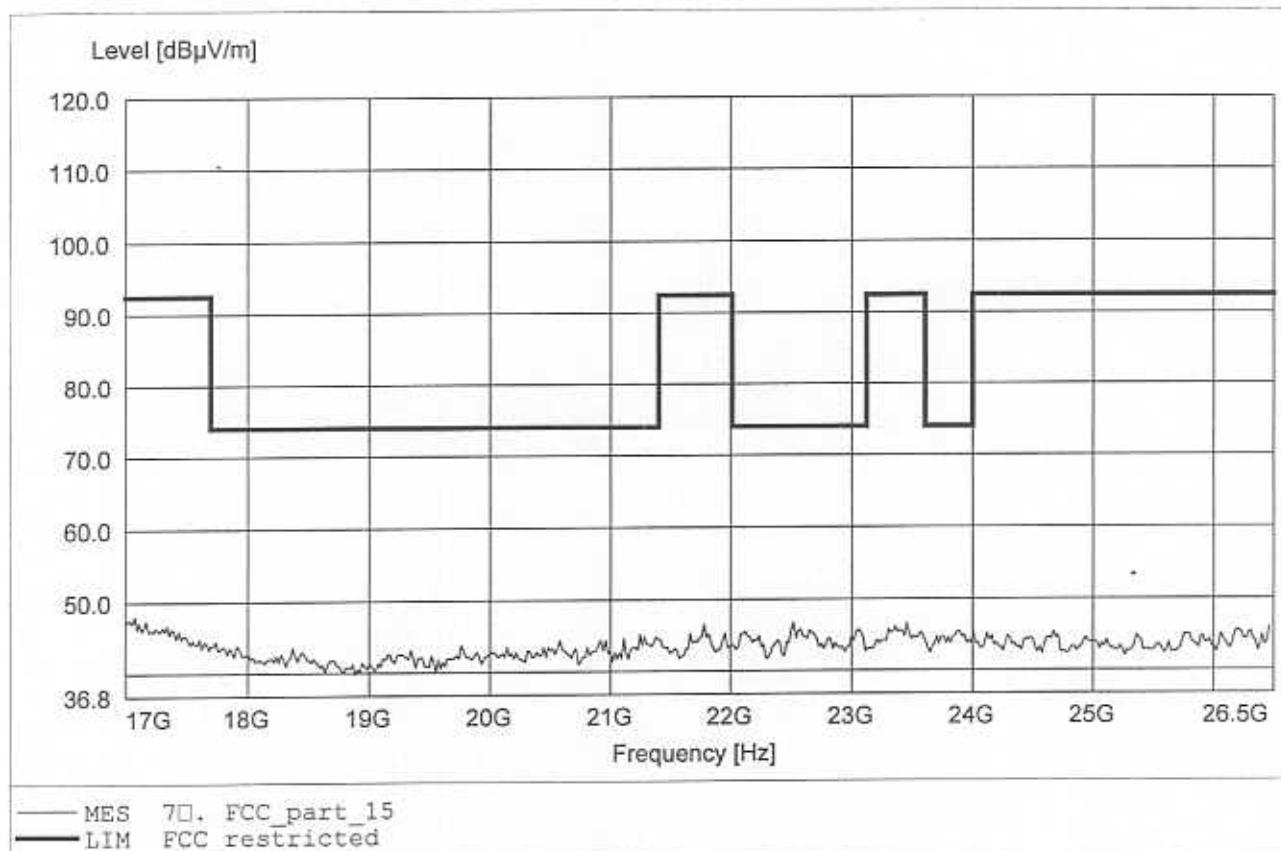


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2402 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.057GHz, Emax: 47.93dBµV/m, RBW: 1MHz

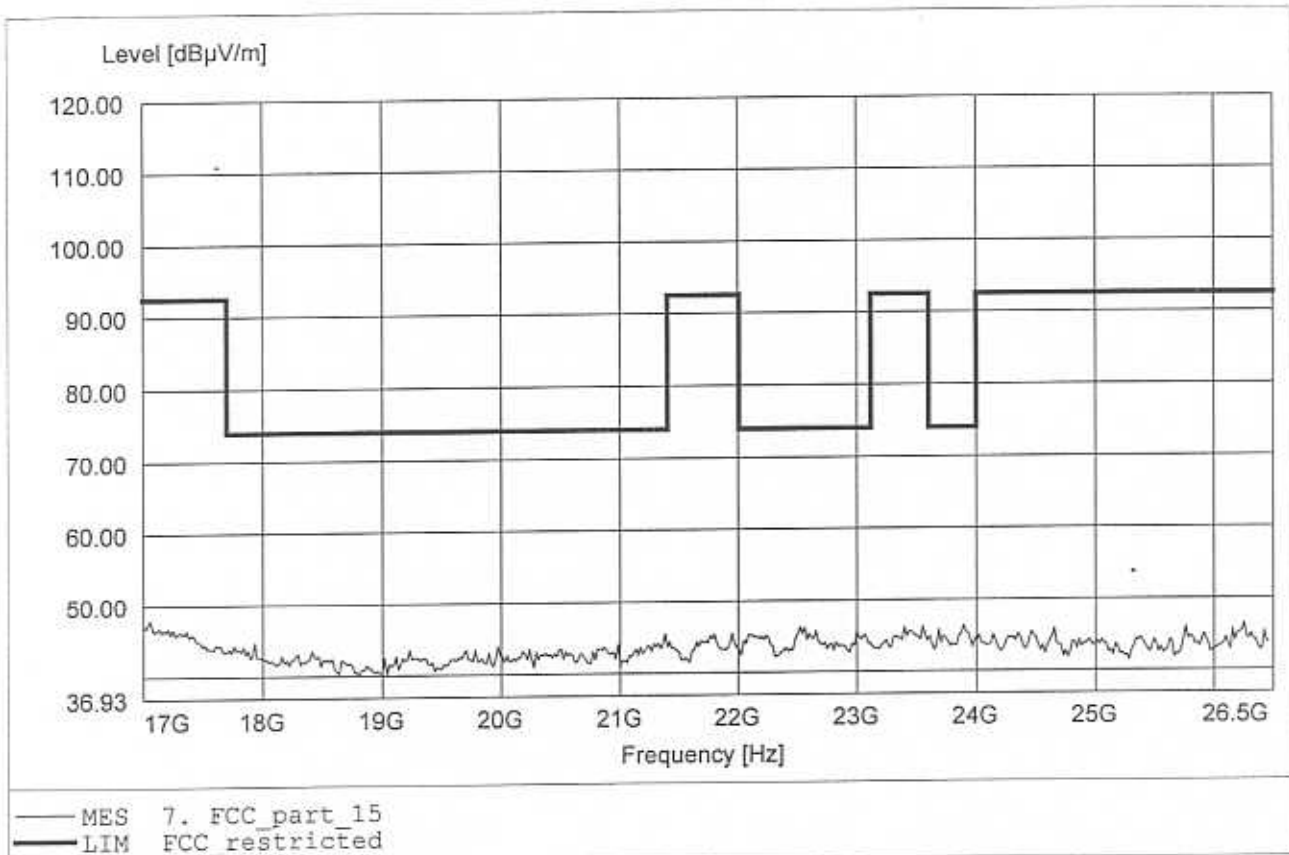


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2441 MHZ
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.956MHz, Emax: 31.98dBμV/m, RBW: 100kHz

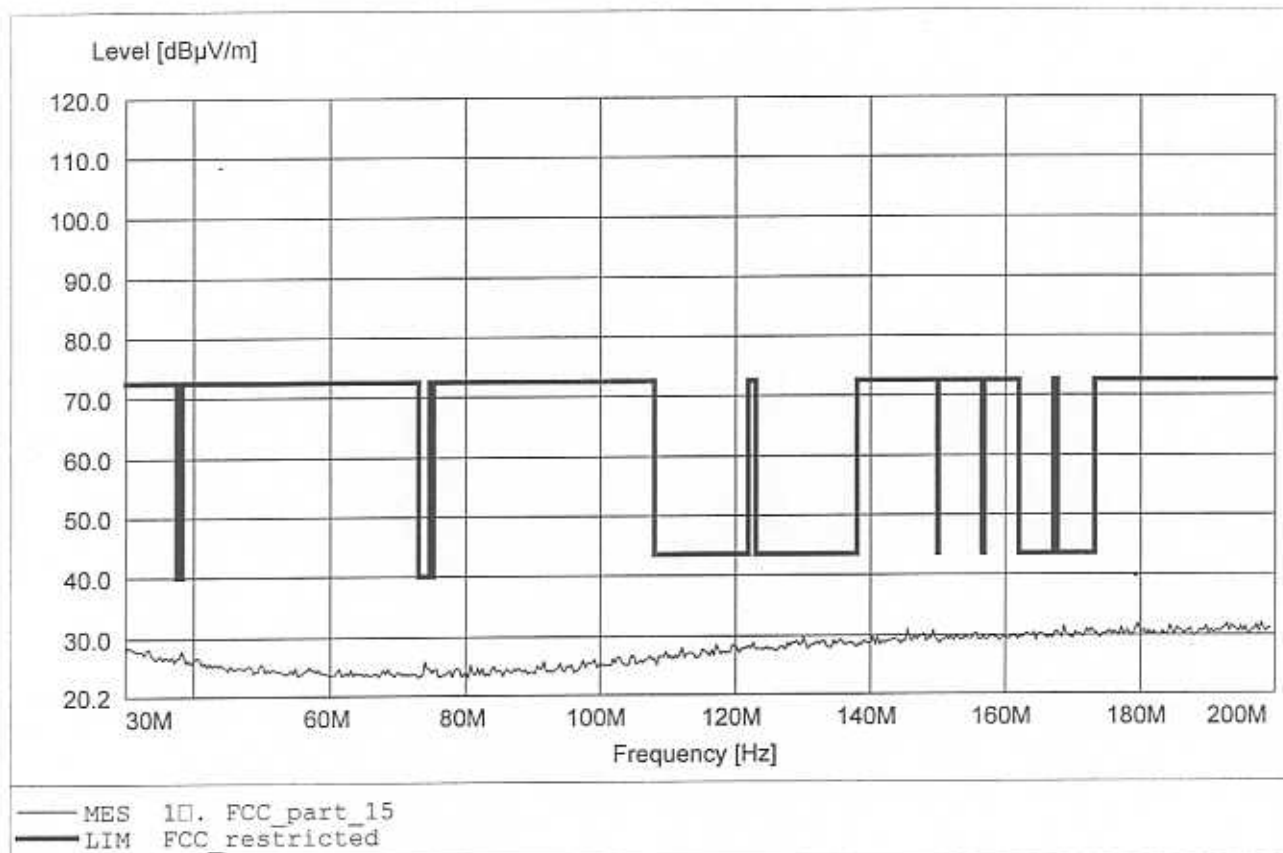


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2441 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 195.912MHz, Emax: 32.13dBµV/m, RBW: 100kHz

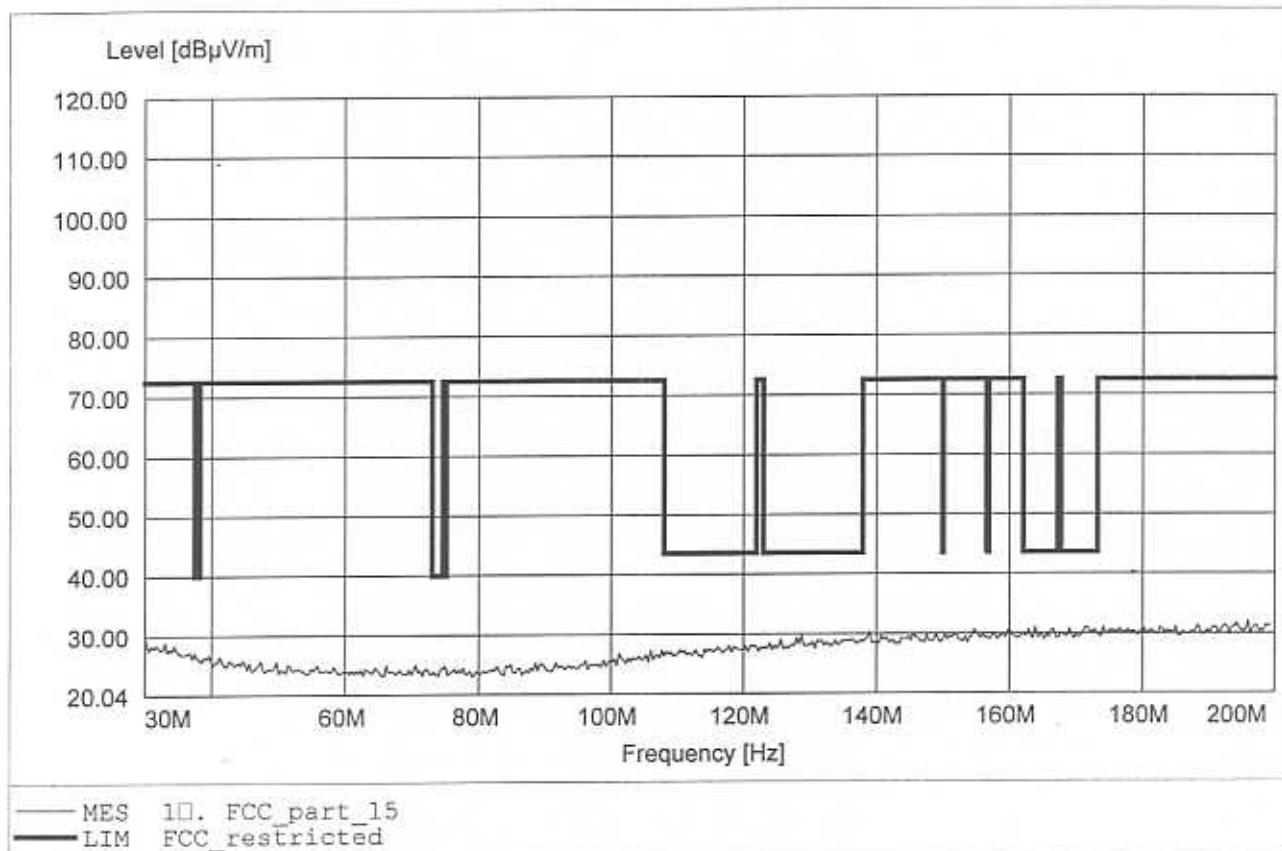


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2441 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 996.794MHz, Emax: 22.83dBμV/m, RBW: 100kHz

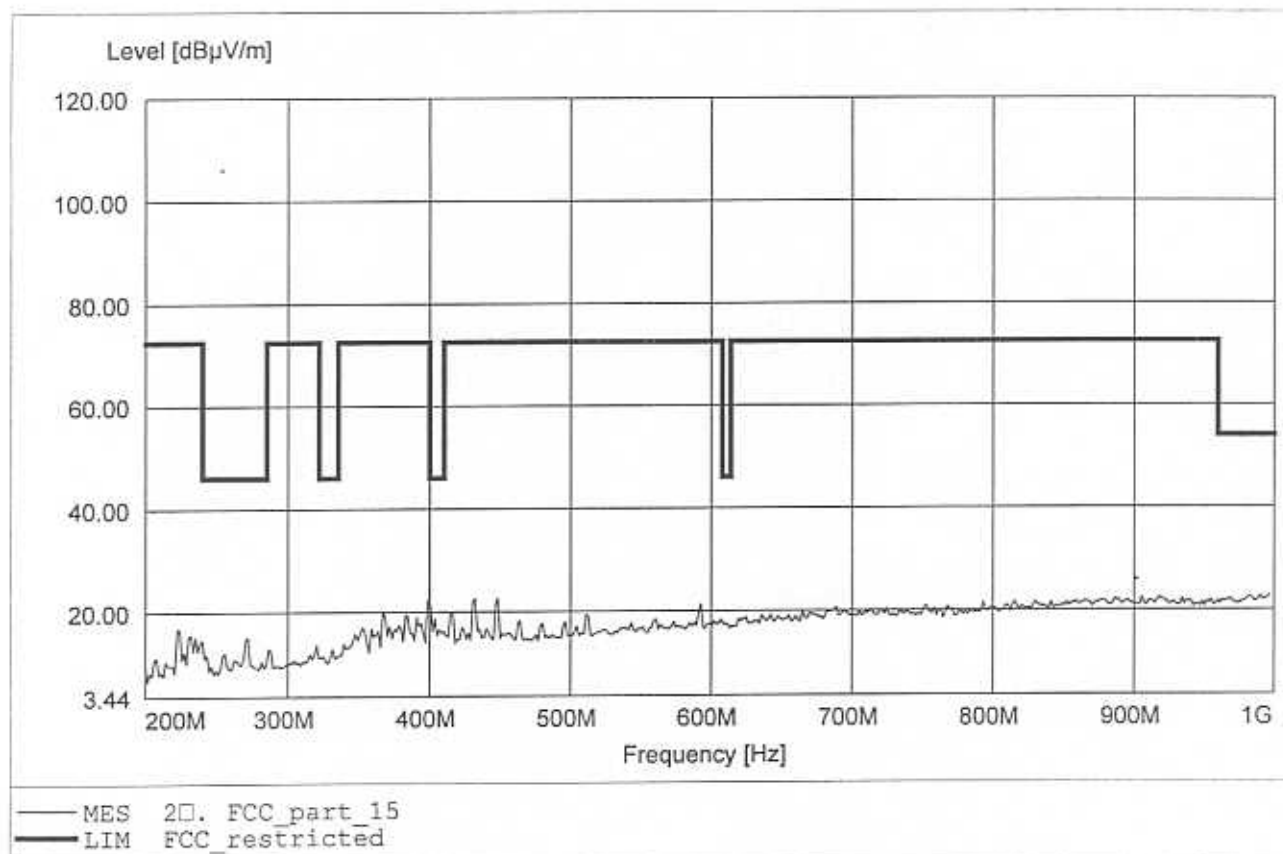


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2441 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 995.190MHz, Emax: 23.09dBuV/m, RBW: 100kHz

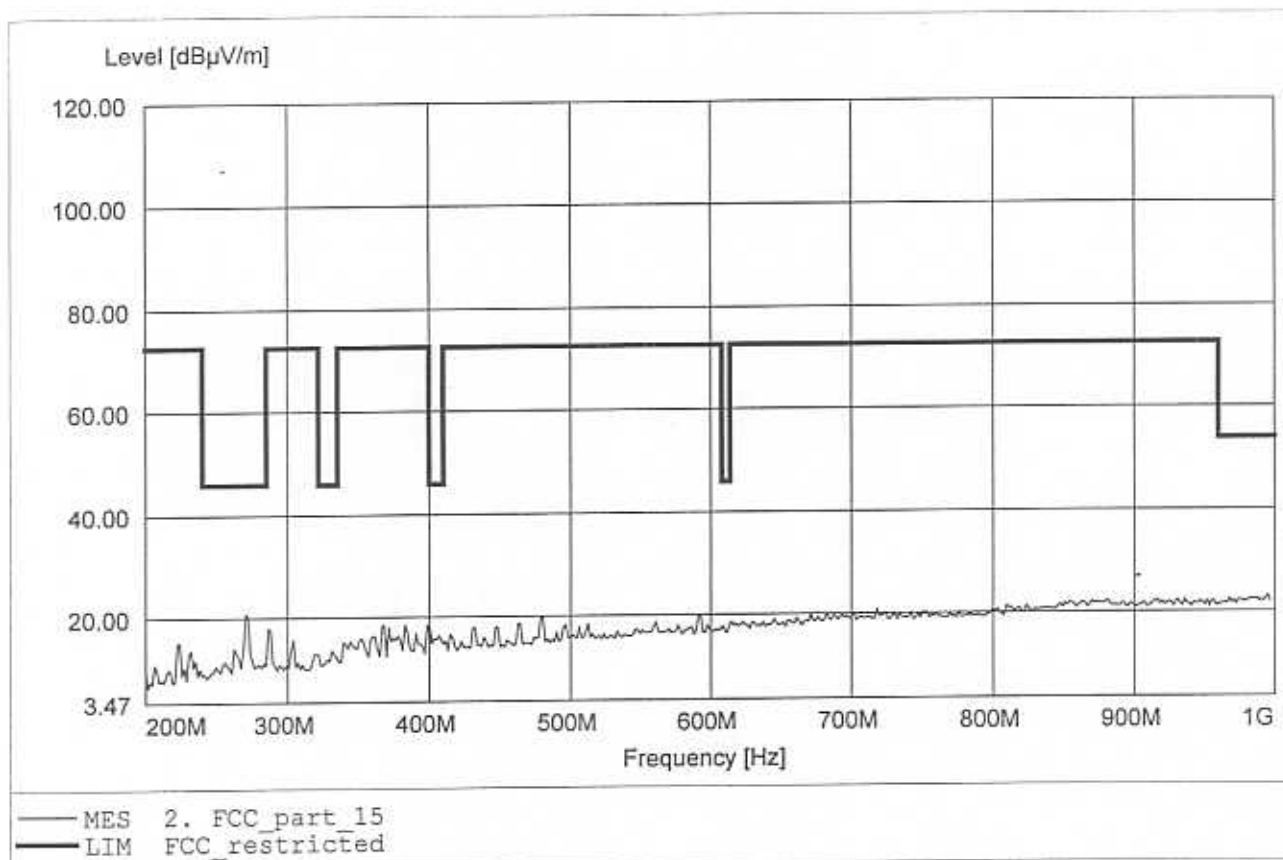


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2441 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to S15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 1.220GHz, Emax: 49.07dBuV/m, RBW: 1MHz

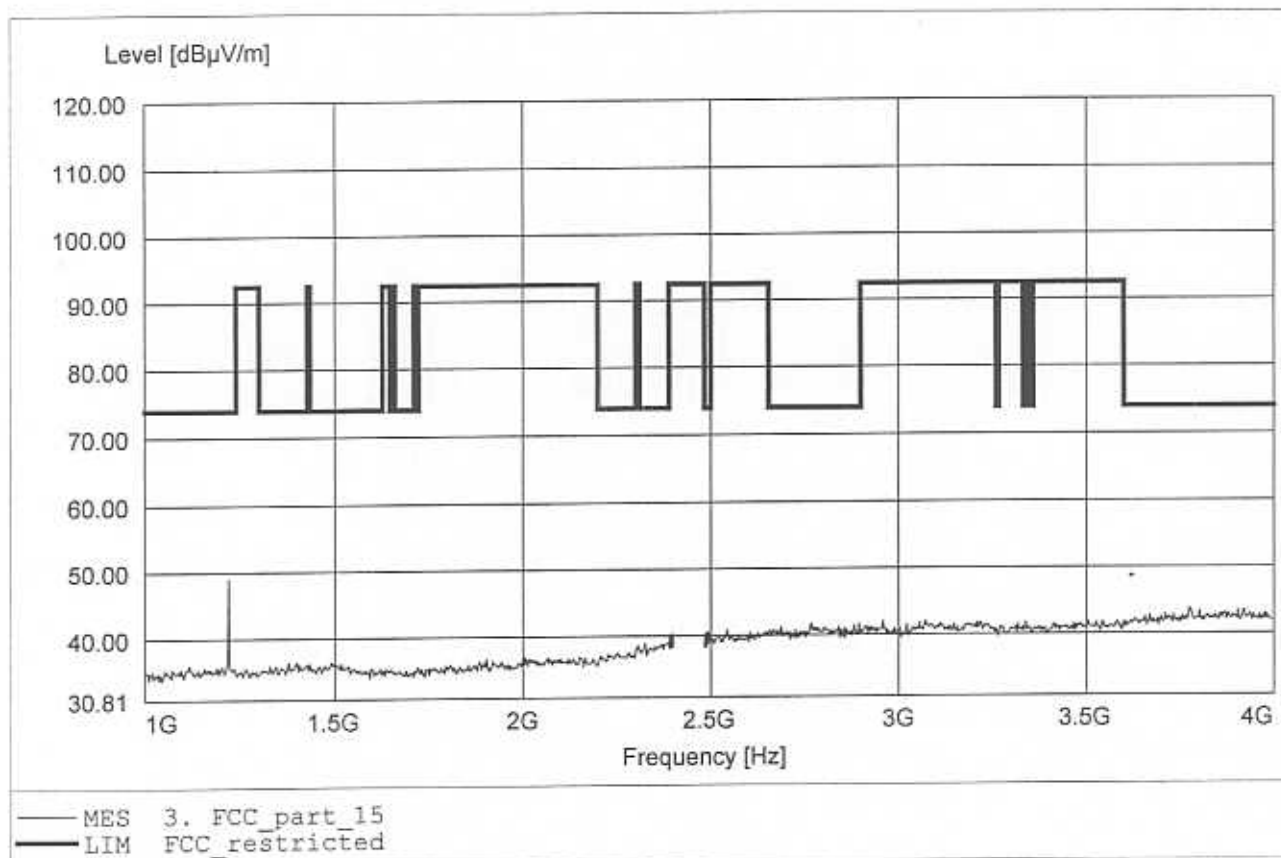


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2441 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to S15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 1.220GHz, Emax: 45.61dBµV/m, RBW: 1MHz

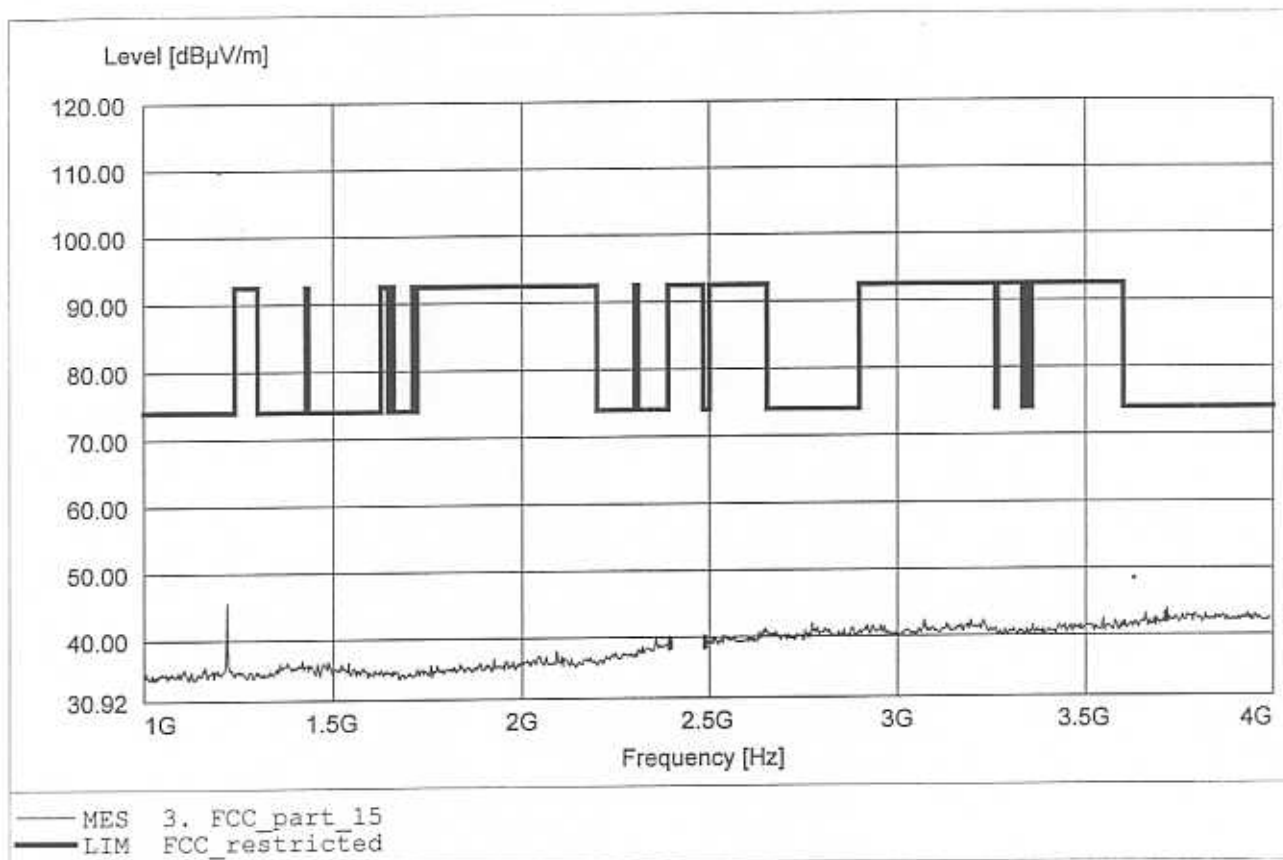


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2441 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to S15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 1.220GHz, Emax: 49.07dBµV/m, RBW: 1MHz

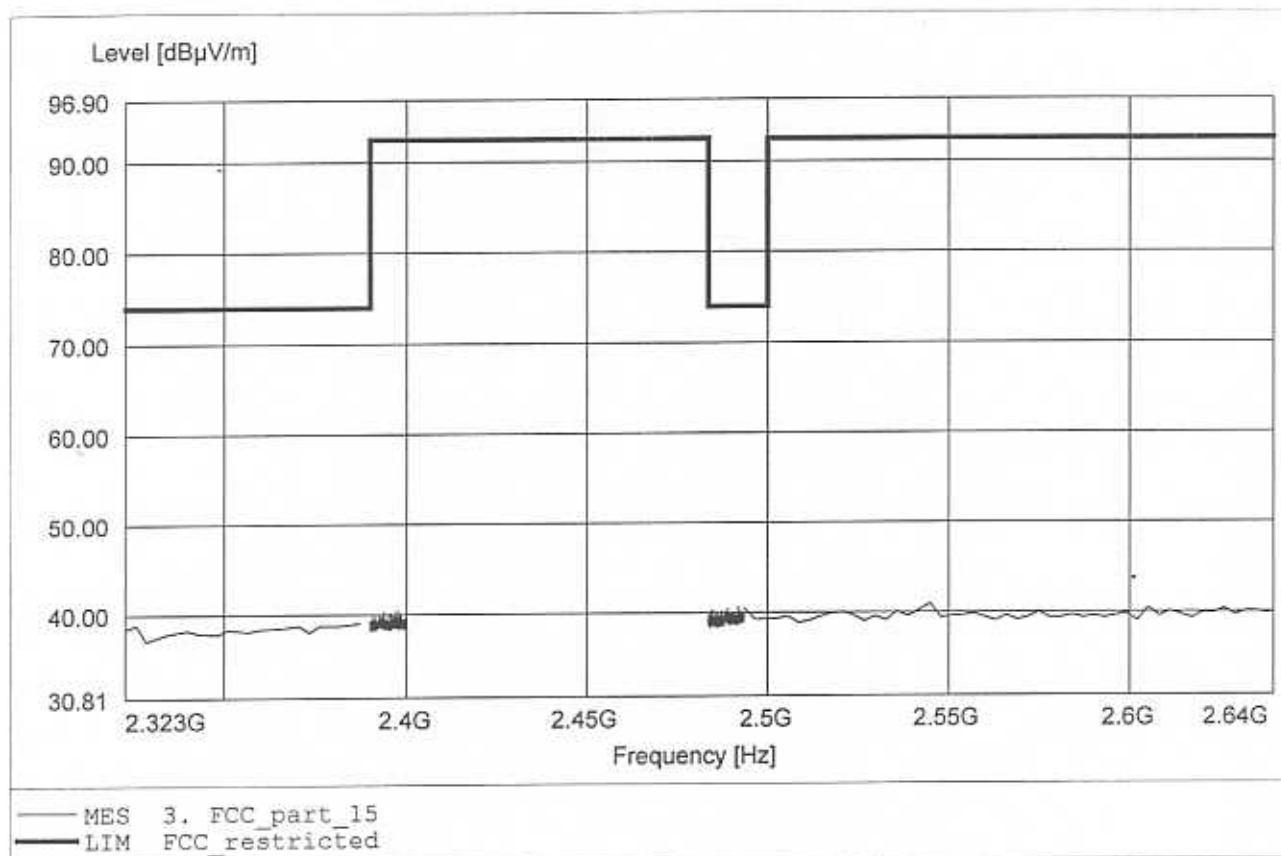


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2441 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 1.220GHz, Emax: 45.61dBuV/m, RBW: 1MHz

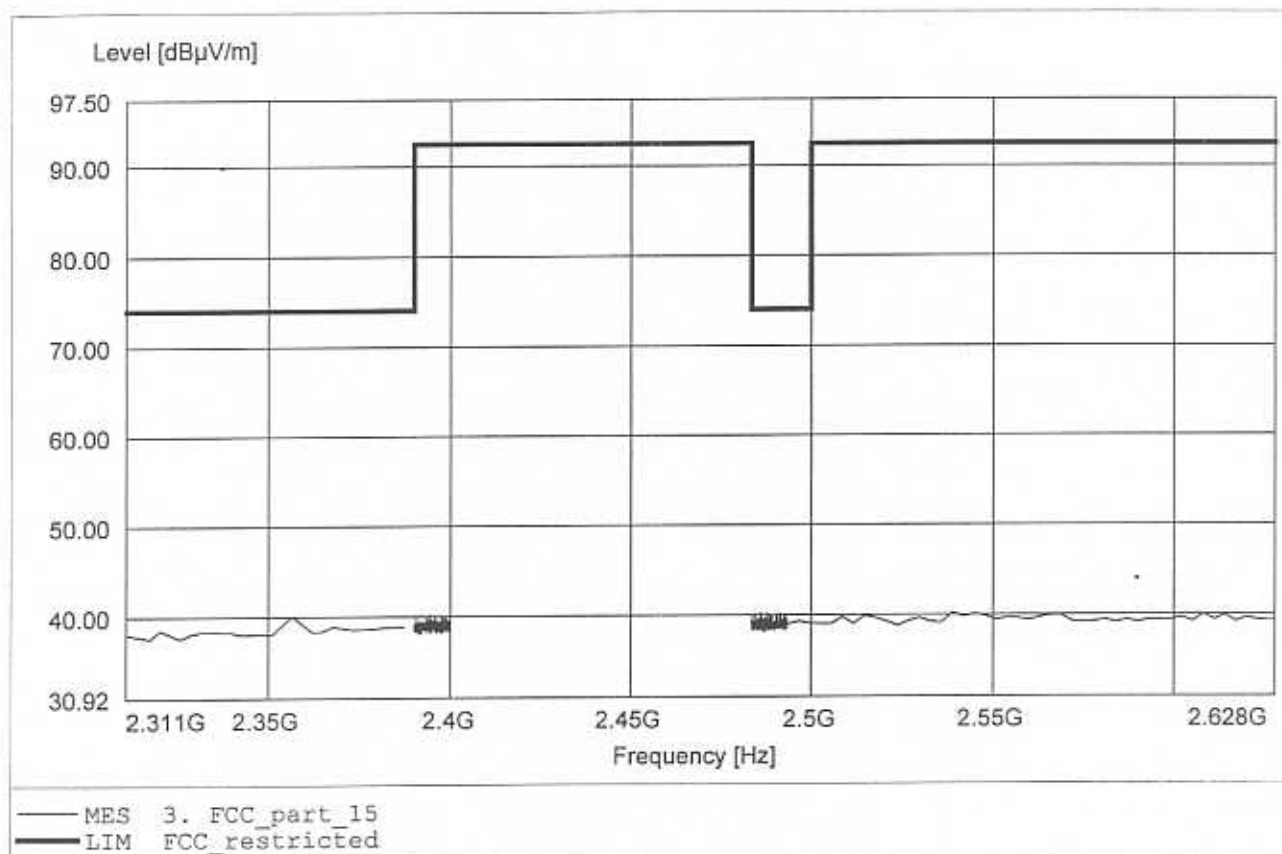


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2441 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 41.84dBμV/m, RBW: 1MHz

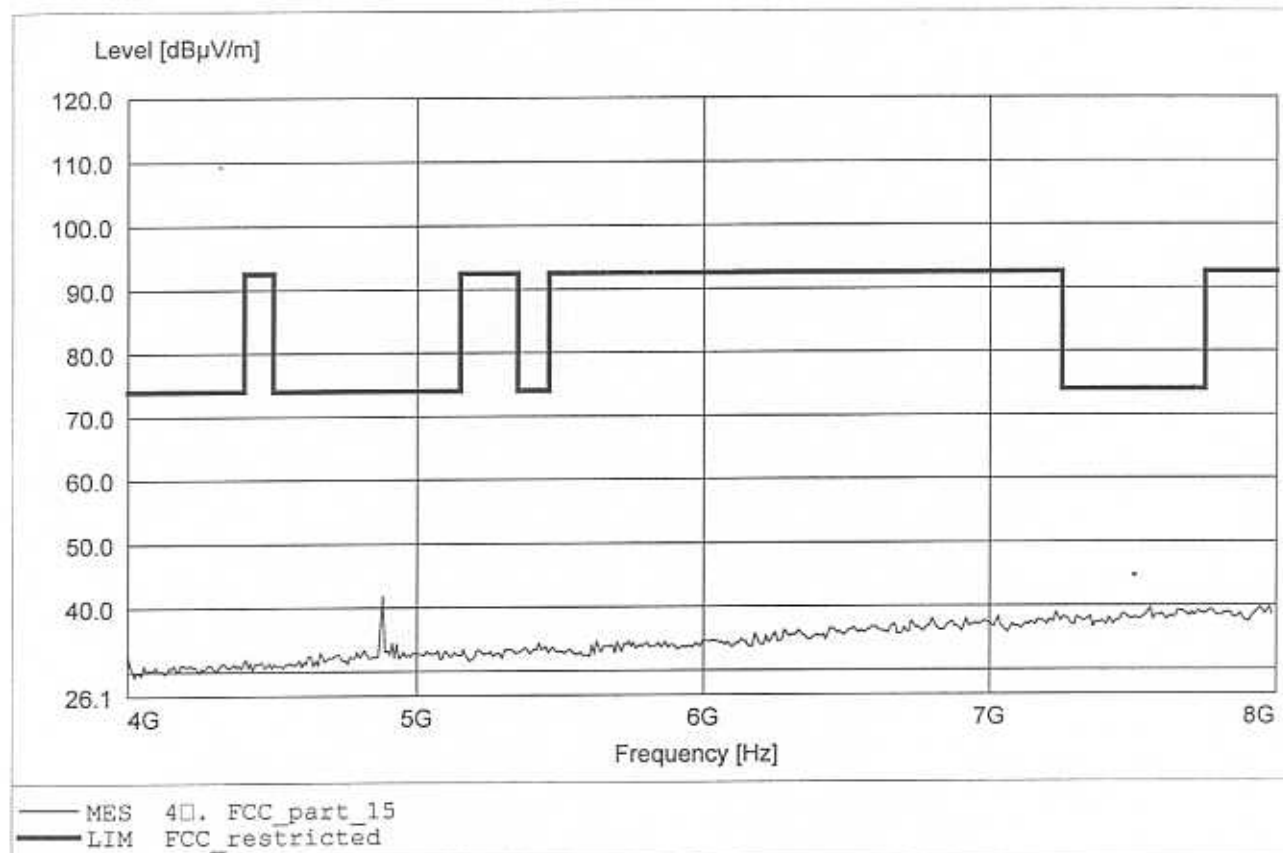


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2441 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom: 23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.503GHz, Emax: 40.14dBμV/m, RBW: 1MHz

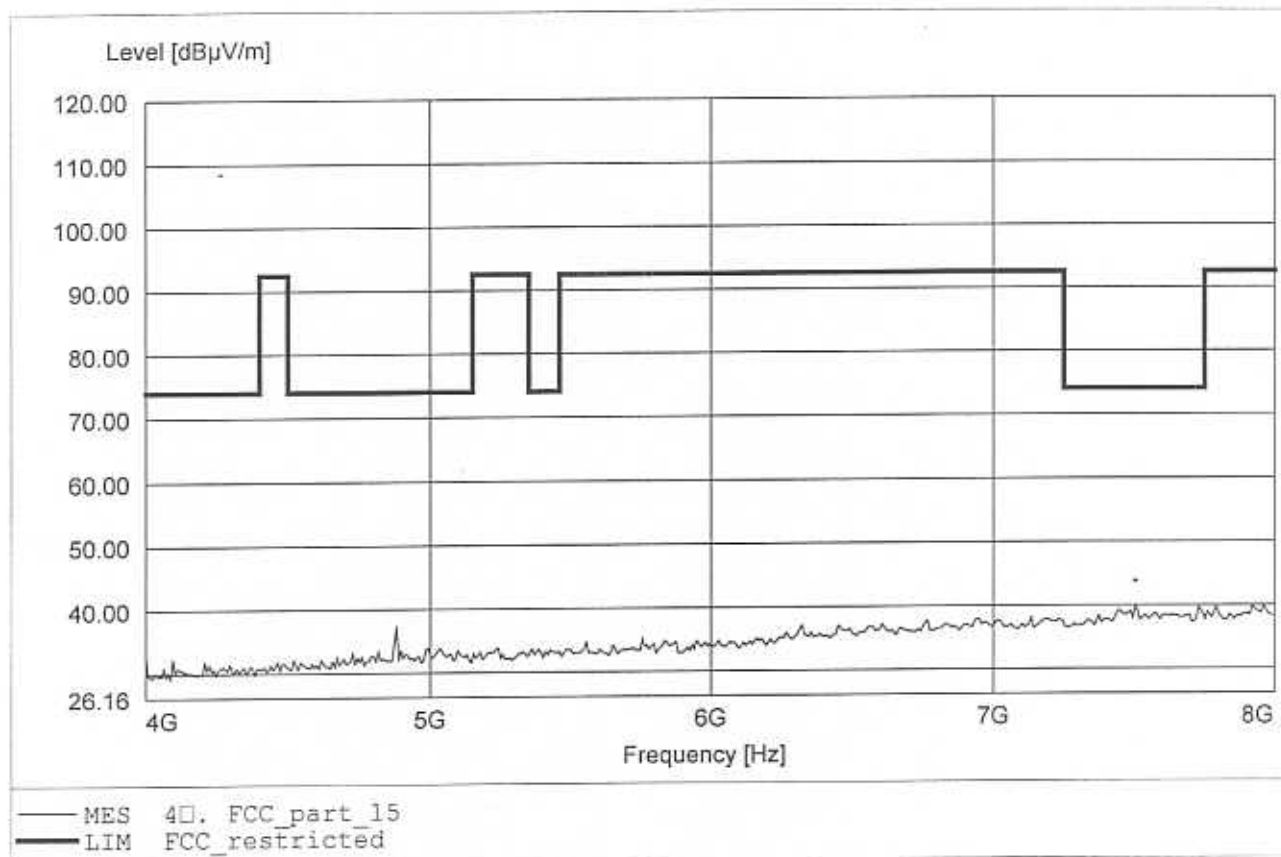


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2441 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom: 23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 11.535GHz, Emax: 43.91dBμV/m, RBW: 1MHz

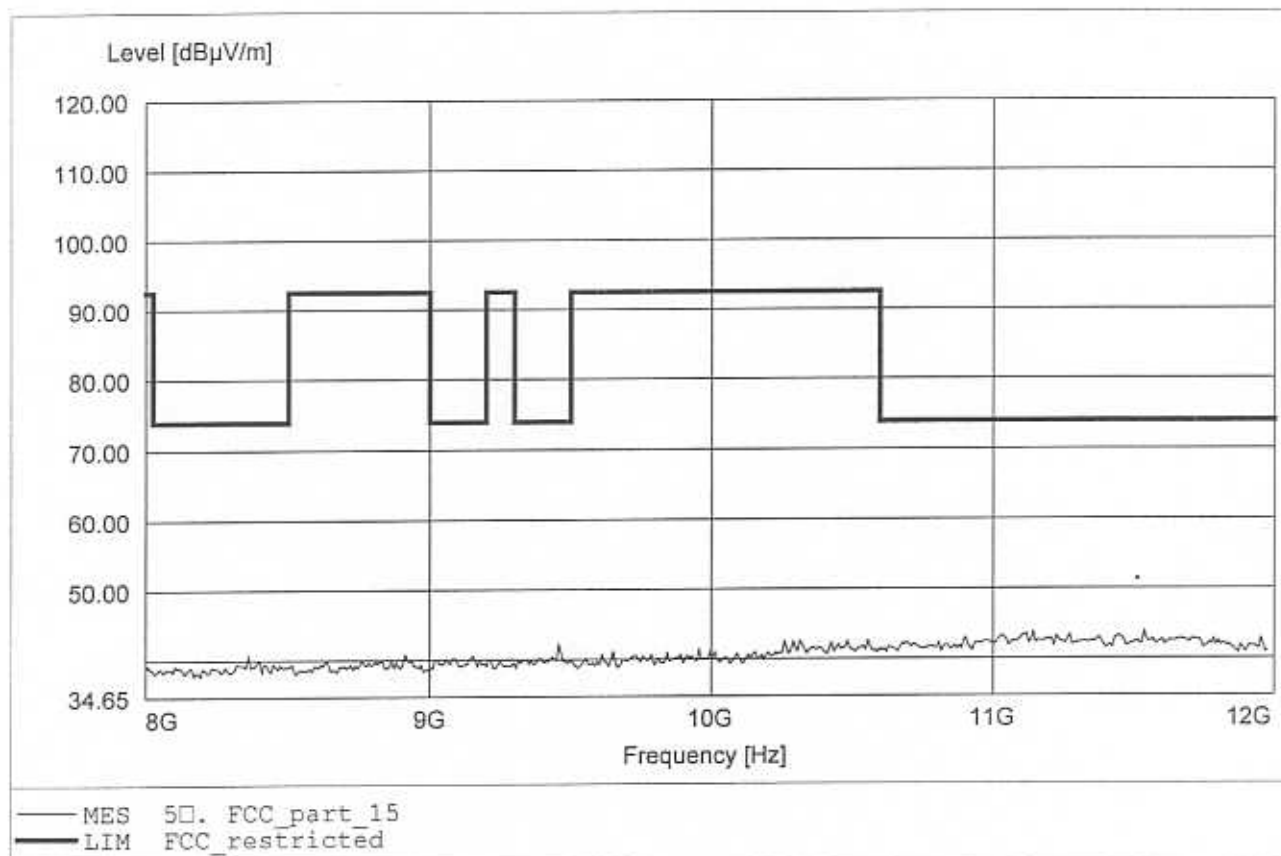


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2441 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 11.222GHz, Emax: 43.57dBµV/m, RBW: 1MHz

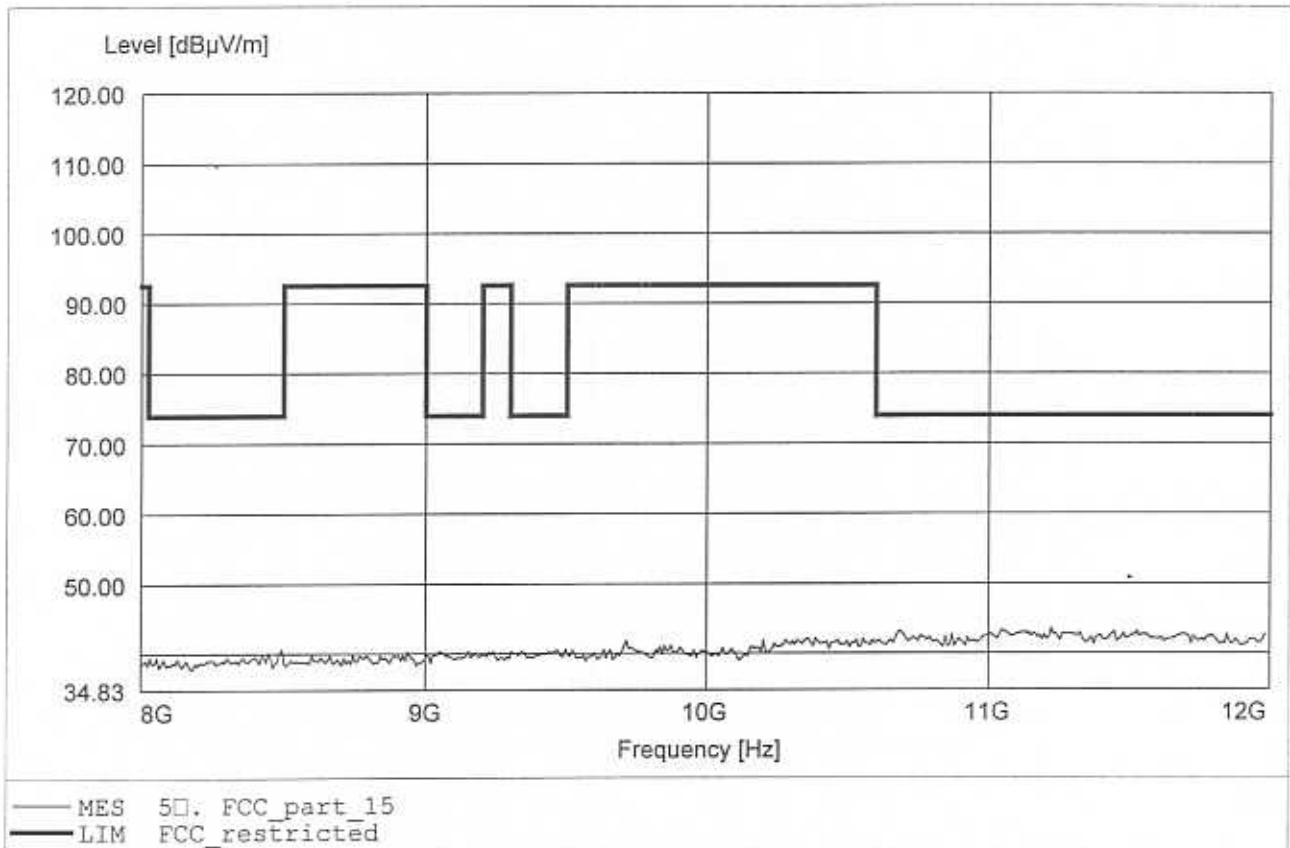


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2441 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.545GHz, Emax: 46.15dBμV/m, RBW: 1MHz

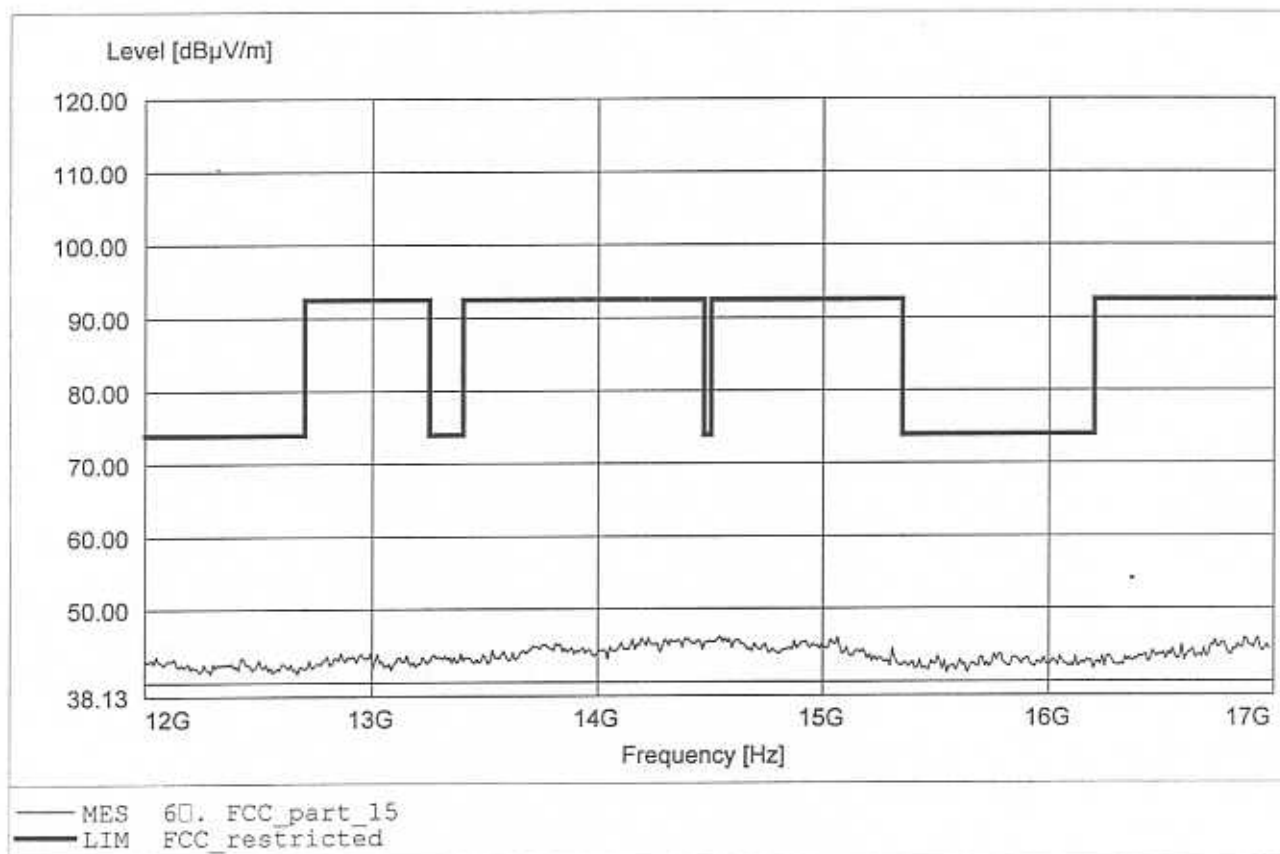


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2441 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.214GHz, Emax: 46.61dBμV/m, RBW: 1MHz

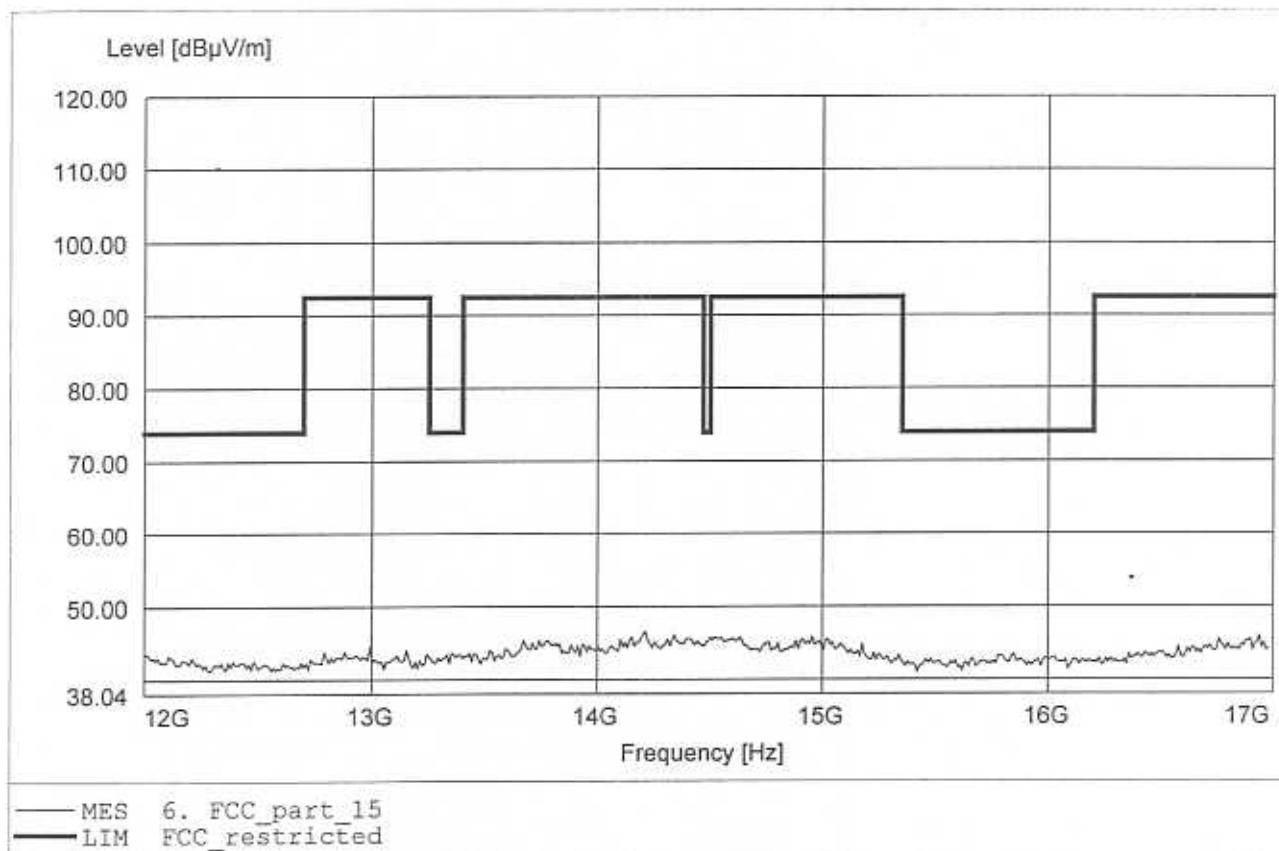

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2441 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.038GHz, Emax: 47.84dBμV/m, RBW: 1MHz

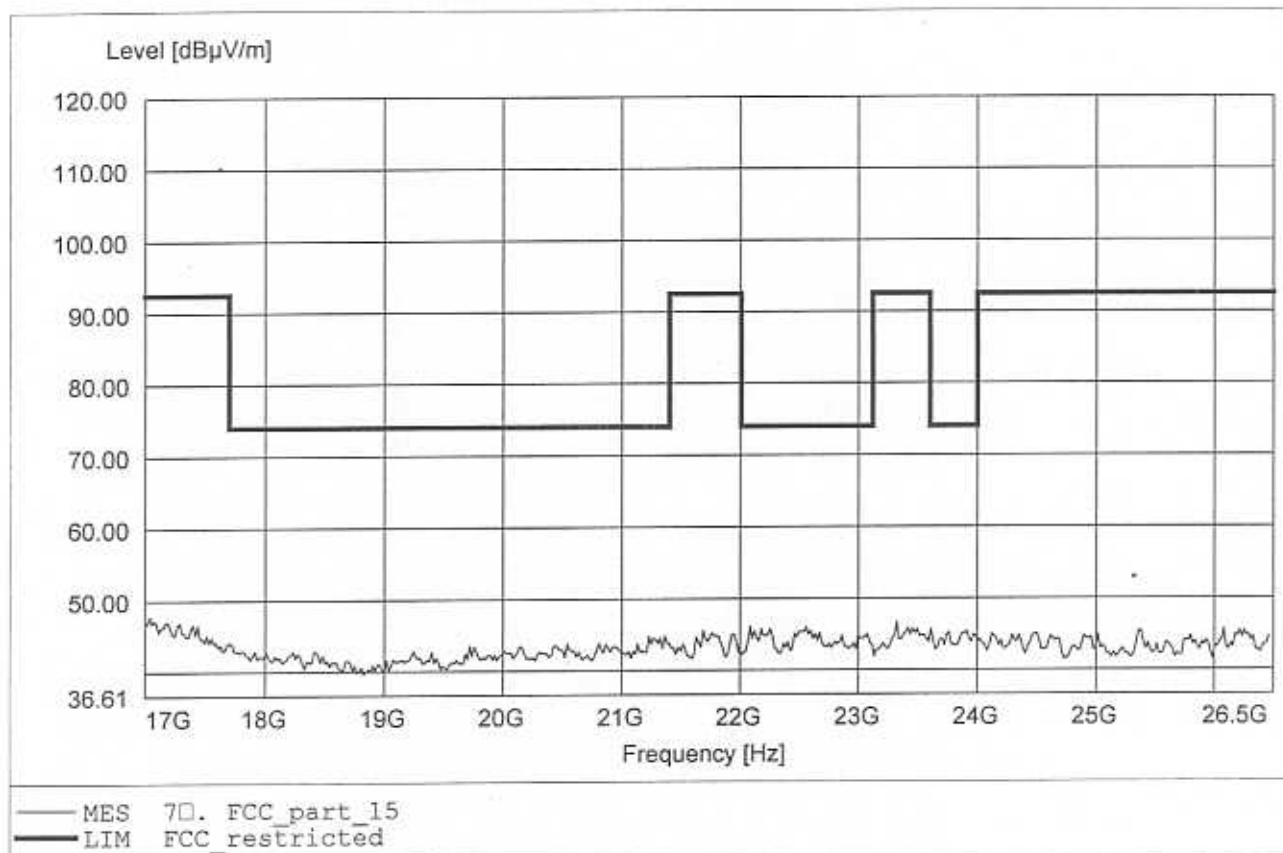

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Jabra FreeSpeak Bluetooth Wireless Headset Tx 2441 MHz
Model: BT200
Approval Holder: GN Netcom A/S
Operating Condition: Tnom:23°C / Unom: 3.7 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.038GHz, Emax: 47.95dBµV/m, RBW: 1MHz

