2TX ANT 6 + ANT 5 OFDMA MODE: 996 Tones, RU Index 67

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5530	83.40	83.80	76.720	76.792
High	5610	83.20	83.00	76.527	76.609
138	5690	82.60	82.20	76.902	76.707

LOW CHANNEL 26dB

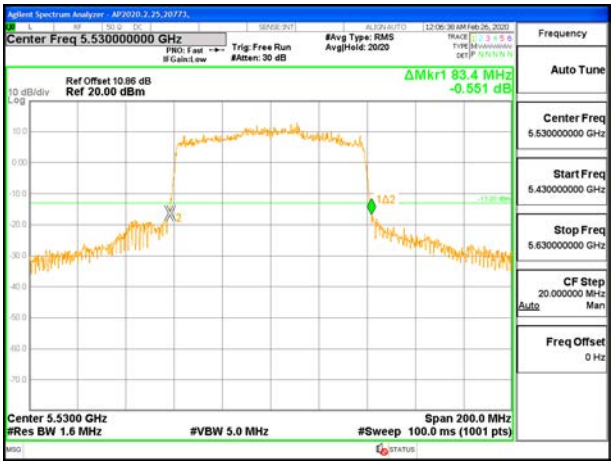

LOW CHANNEL [ANT 6]

LOW CHANNEL [ANT 5]

LOW CHANNEL OBW

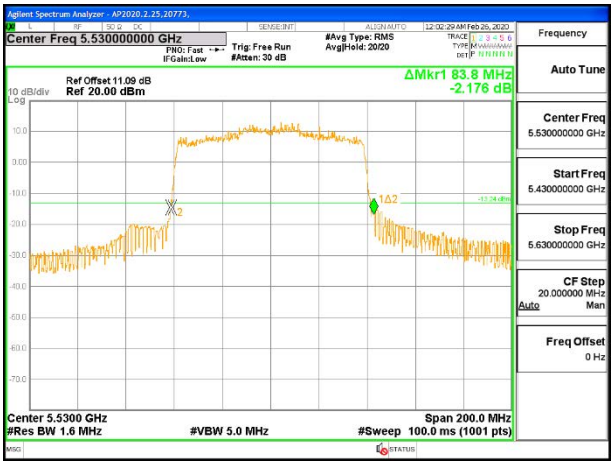

LOW CHANNEL [ANT 6]

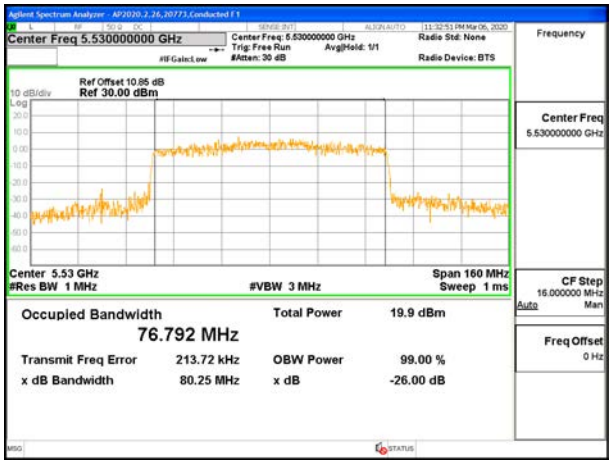

LOW CHANNEL [ANT 5]

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.2.19.802.11n HT20 MODE IN THE 5.8 GHz BAND

1TX ANT 6 MODE

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	21.50	17.668
Mid	5785	21.35	17.688
High	5825	21.55	17.585

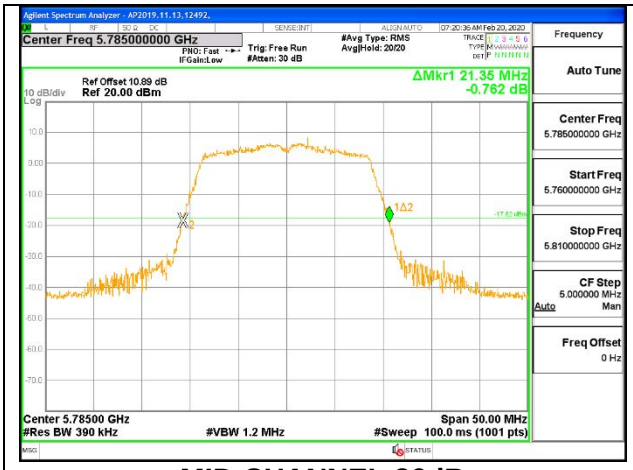

MID CHANNEL 26dB

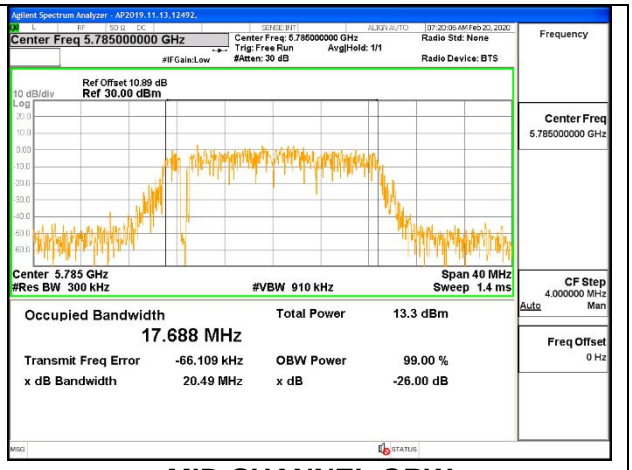

MID CHANNEL OBW

1TX ANT 5 MODE

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	21.50	17.657
Mid	5785	21.20	17.652
High	5825	21.70	17.626

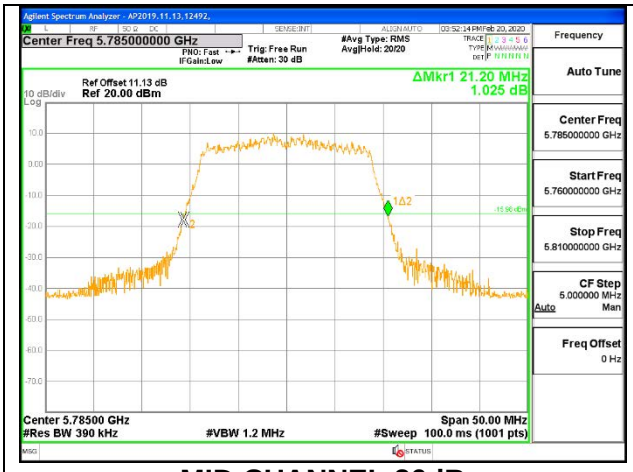

MID CHANNEL 26dB

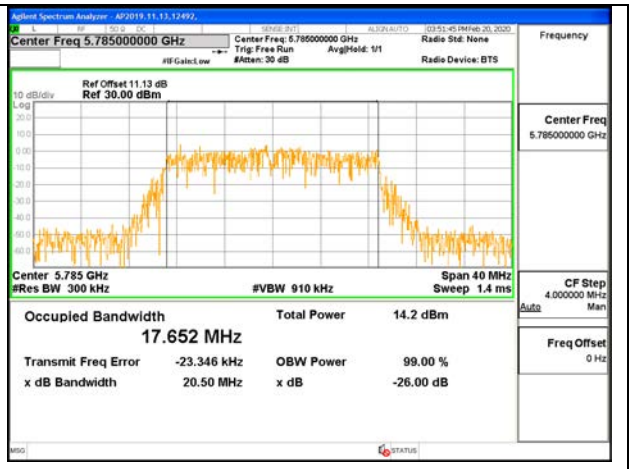

MID CHANNEL OBW

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2TX ANT 6 + ANT 5 CDD MODE

Channel	Frequency (MHz)	26dB Bandwidth Antenna 6 (MHz)	26dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5745	21.60	21.10	17.630	17.792
Mid	5785	21.45	21.20	17.741	17.600
High	5825	21.55	21.30	17.762	17.680

MID CHANNEL 26dB

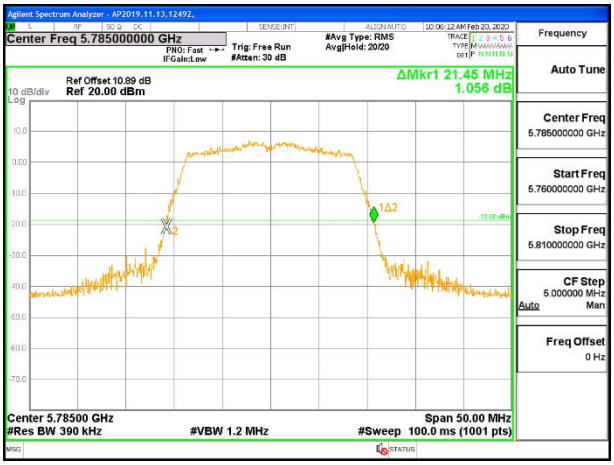

MID CHANNEL [ANT 6]

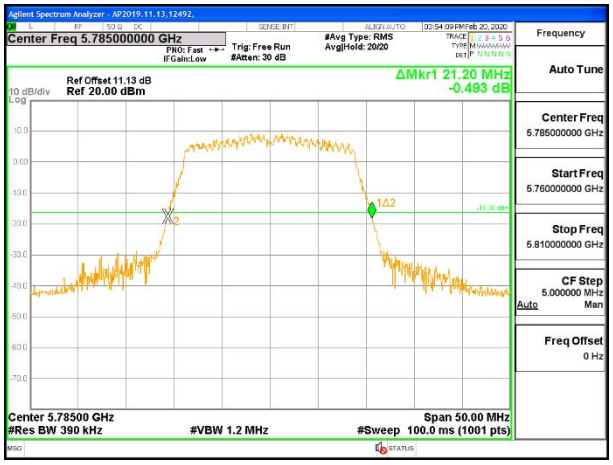

MID CHANNEL [ANT 5]

MID CHANNEL OBW

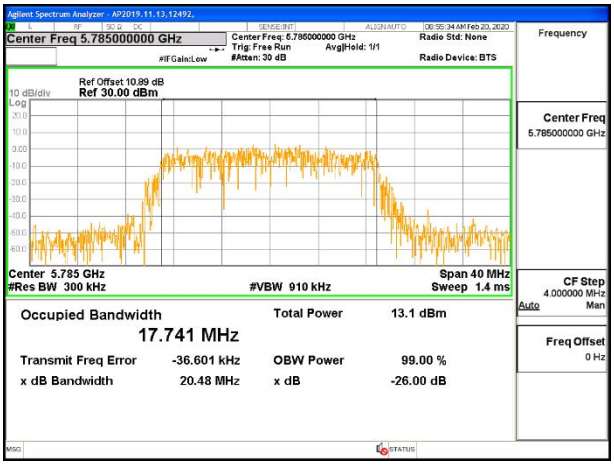

MID CHANNEL [ANT 6]

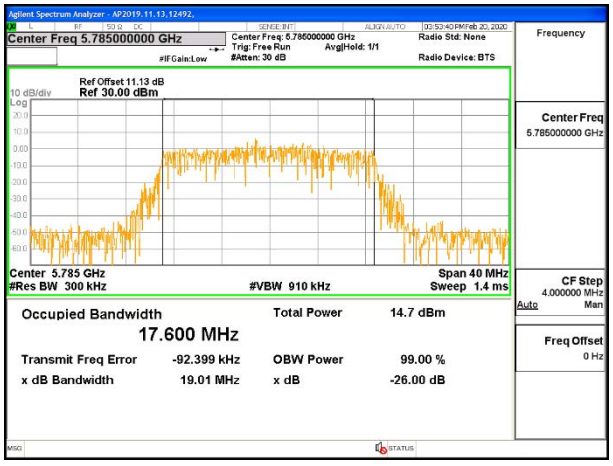

MID CHANNEL [ANT 5]

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.2.20.802.11n HT40 MODE IN THE 5.8 GHz BAND

1TX ANT 6 MODE

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	42.90	36.076
High	5795	43.20	36.067

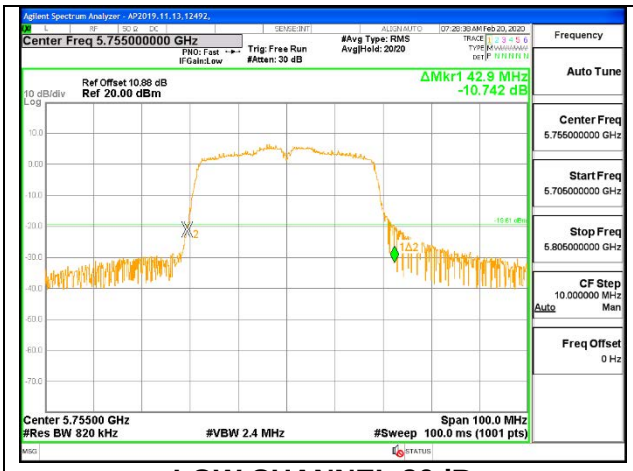

LOW CHANNEL 26dB

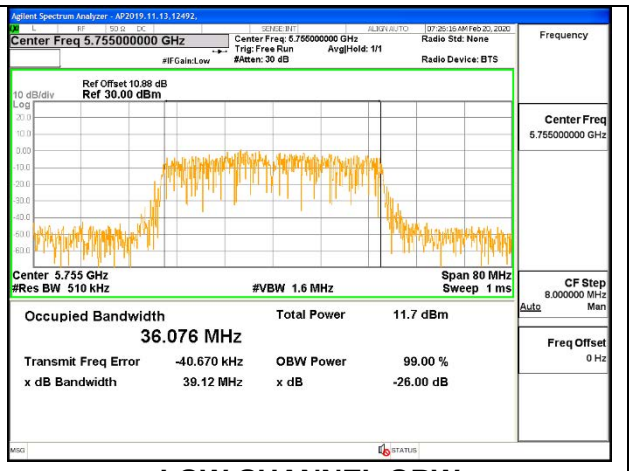

LOW CHANNEL OBW

1TX ANT 5 MODE

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	42.70	36.078
High	5795	43.70	36.062

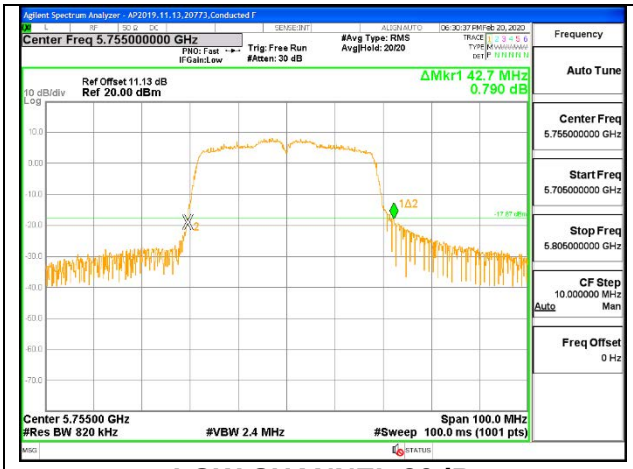

LOW CHANNEL 26dB

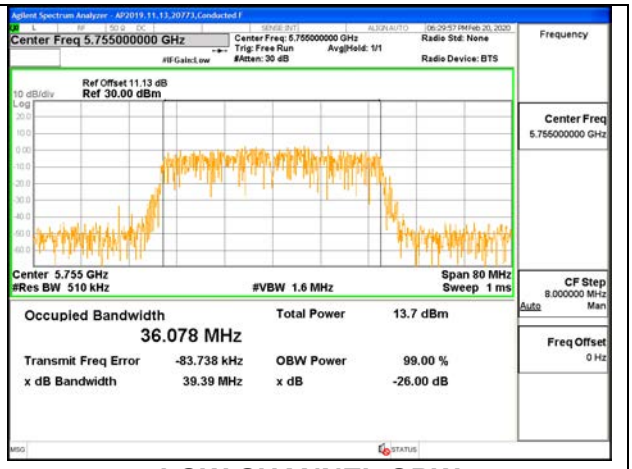

LOW CHANNEL OBW

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2TX ANT 6 + ANT 5 CDD MODE

Channel	Frequency (MHz)	26dB Bandwidth Antenna 6 (MHz)	26dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5755	43.30	40.90	36.030	36.075
High	5795	43.30	41.20	35.997	36.237

LOW CHANNEL 26dB

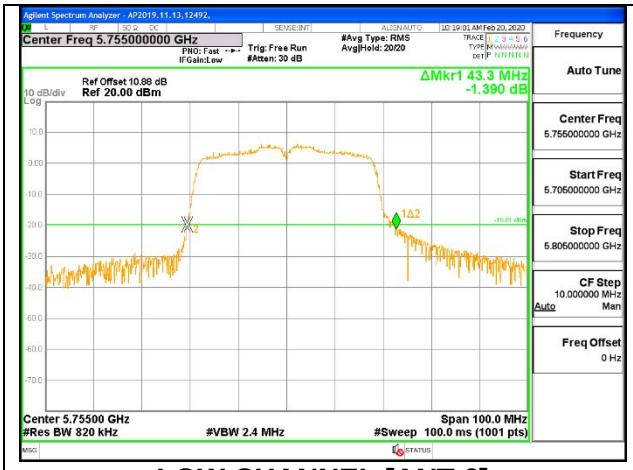

LOW CHANNEL [ANT 6]

LOW CHANNEL [ANT 5]

LOW CHANNEL OBW

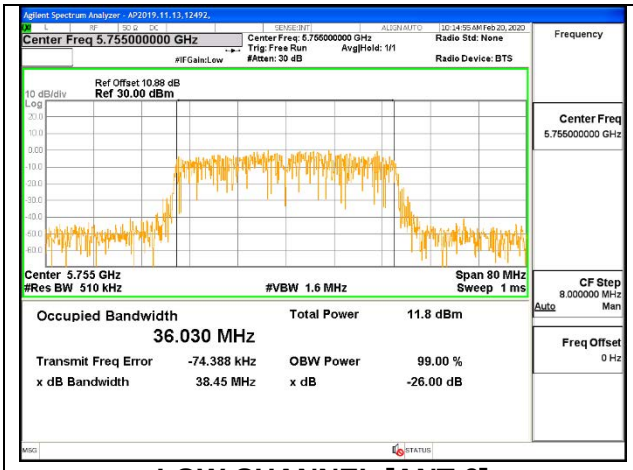

LOW CHANNEL [ANT 6]

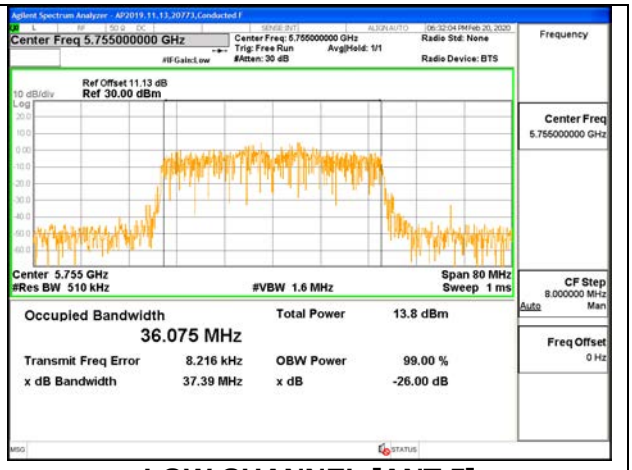

LOW CHANNEL [ANT 5]

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.2.21.802.11ac VHT80 MODE IN THE 5.8 GHz BAND

1TX ANT 6 MODE

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5775	83.20	75.223

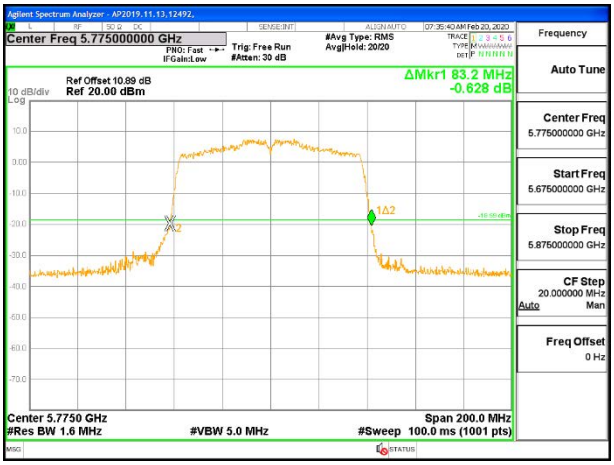

MID CHANNEL 26dB

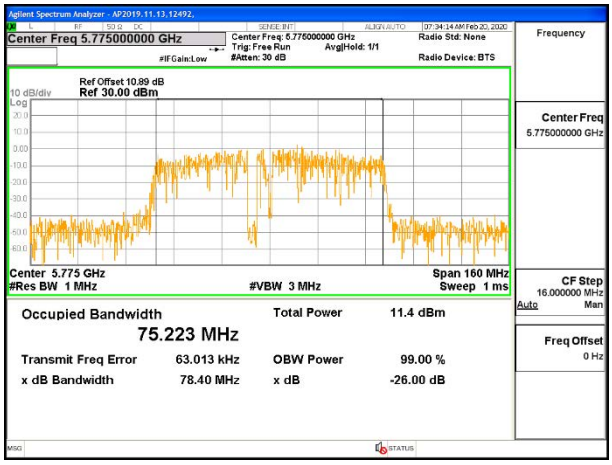

MID CHANNEL OBW

1TX ANT 5 MODE

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5775	83.20	75.882

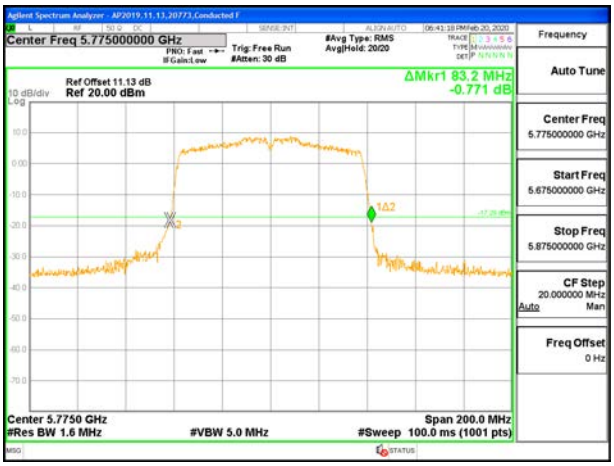

MID CHANNEL 26dB

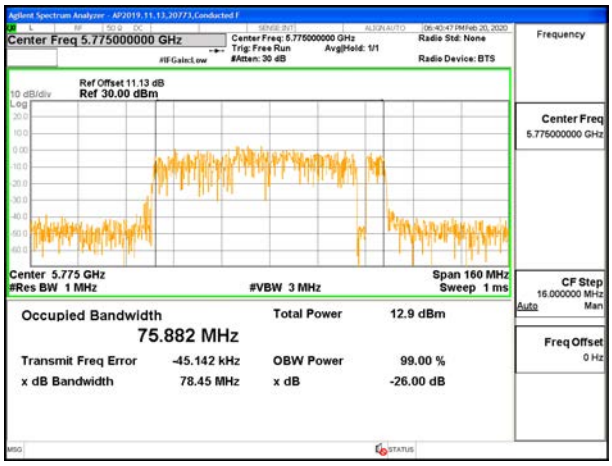

MID CHANNEL OBW

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2TX ANT 6 + ANT 5 CDD MODE

Channel	Frequency (MHz)	26dB Bandwidth Antenna 6 (MHz)	26dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Mid	5775	83.00	84.00	75.525	75.637

MID CHANNEL 26dB

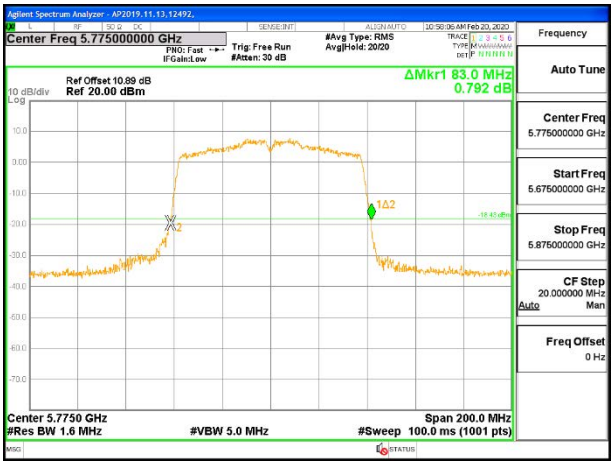

MID CHANNEL [ANT 6]

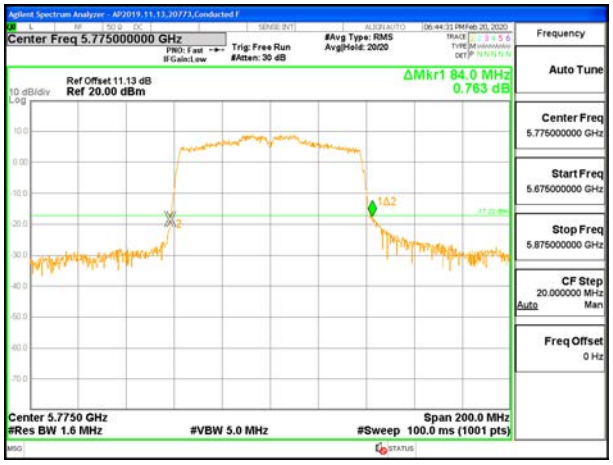

MID CHANNEL [ANT 5]

MID CHANNEL OBW

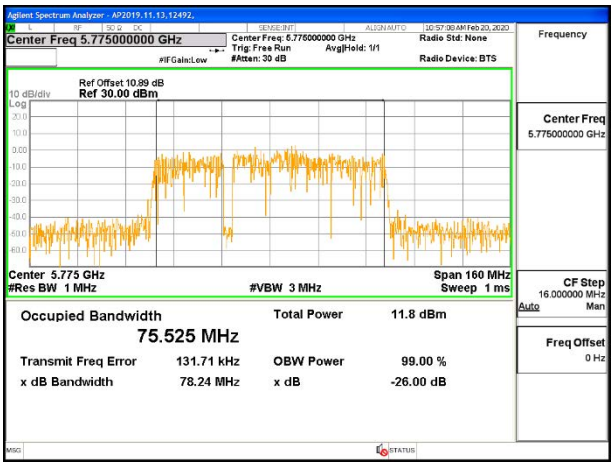

MID CHANNEL [ANT 6]

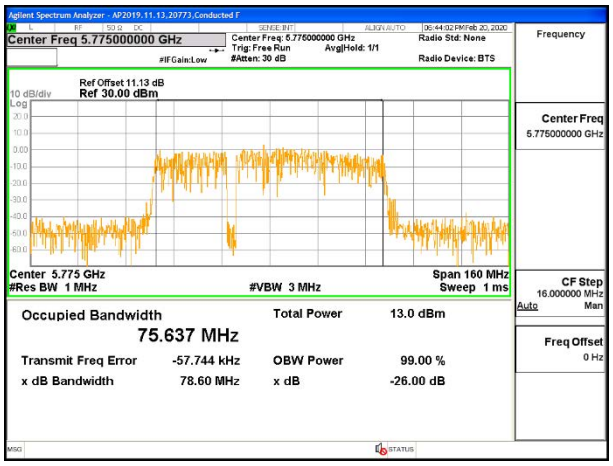

MID CHANNEL [ANT 5]

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.2.22.802.11ax HE20 MODE IN THE 5.8 GHz BAND

1TX ANT 6 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	20.15	18.404
Mid	5785	20.15	18.157
High	5825	20.15	18.376

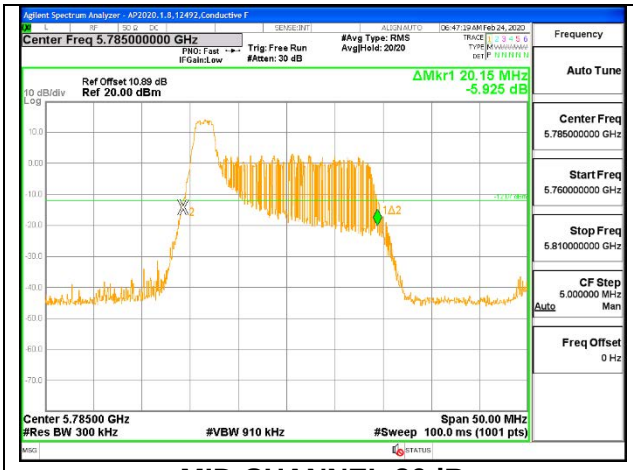

MID CHANNEL 26dB

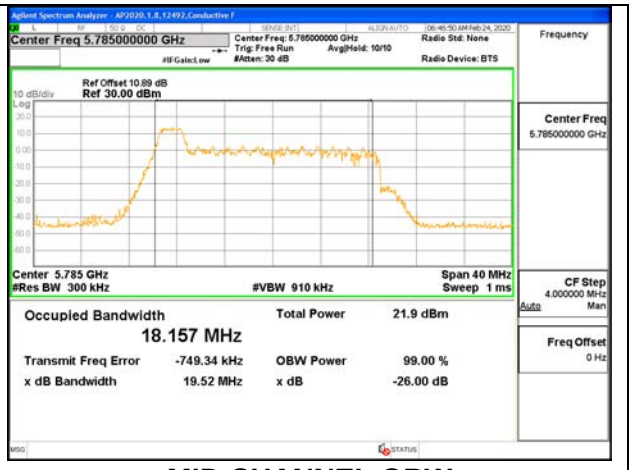

MID CHANNEL OBW

1TX ANT 6 MODE: 26 Tones, RU Index 4

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	19.35	17.163
Mid	5785	19.30	17.245
High	5825	19.20	17.158

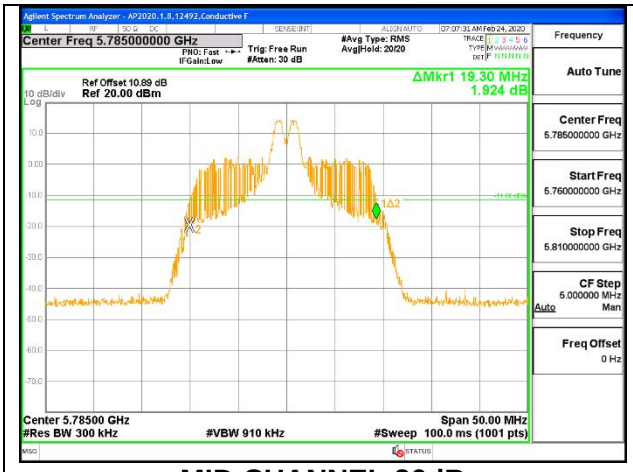

MID CHANNEL 26dB

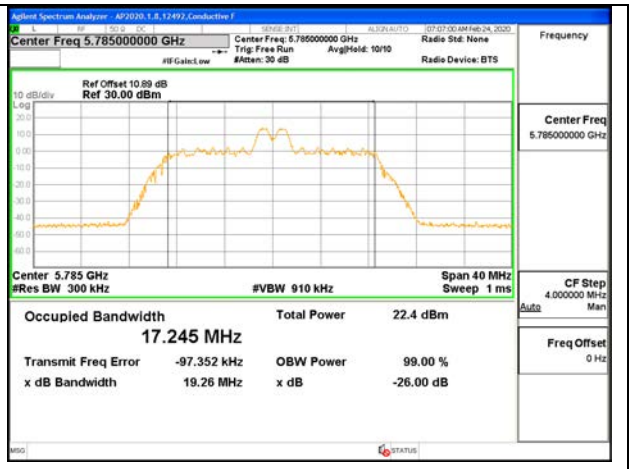

MID CHANNEL OBW

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

1TX ANT 6 MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	20.80	18.537
Mid	5785	20.65	18.438
High	5825	20.65	18.450

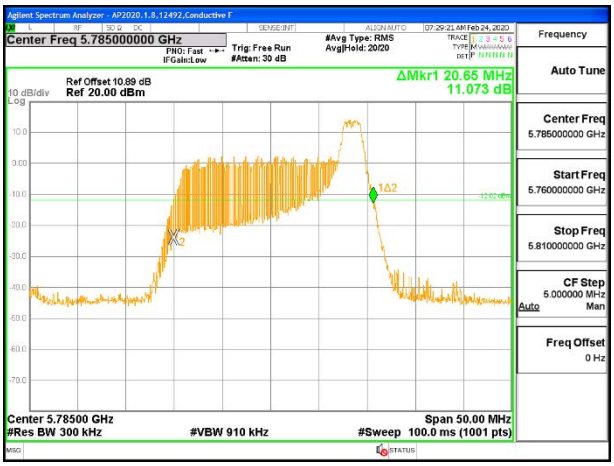

MID CHANNEL 26dB

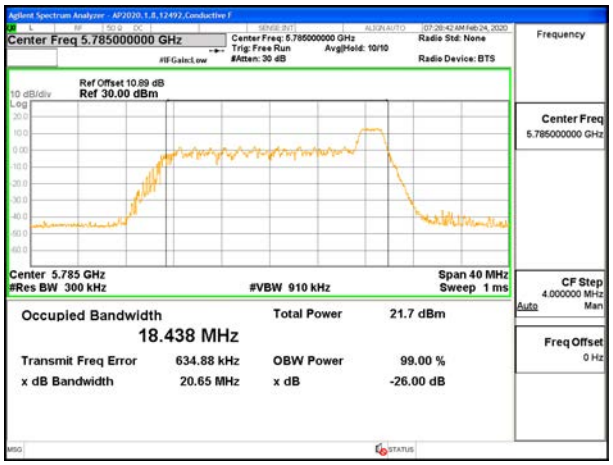

MID CHANNEL OBW

1TX ANT 6 MODE: 242 Tones, RU Index 61

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	21.40	18.906
Mid	5785	21.55	18.830
High	5825	21.45	18.912

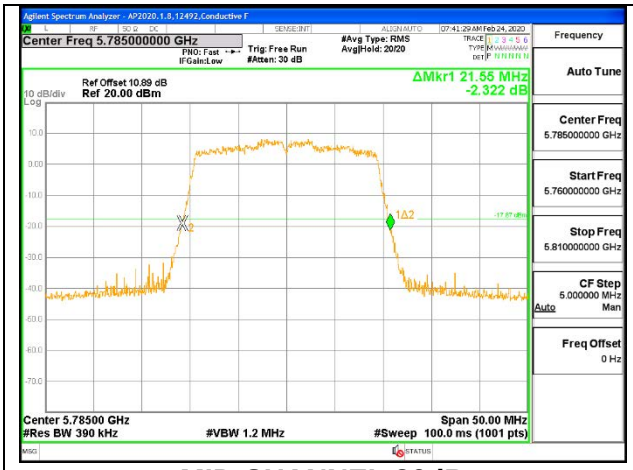

MID CHANNEL 26dB

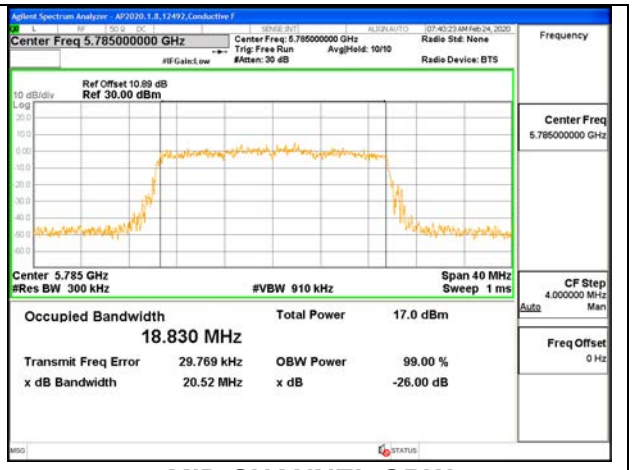

MID CHANNEL OBW

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

1TX ANT 5 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	20.25	18.367
Mid	5785	20.20	18.104
High	5825	20.10	18.275

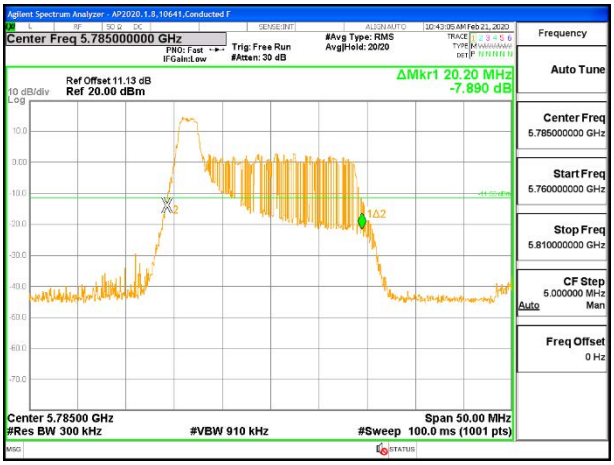

MID CHANNEL 26dB

MID CHANNEL OBW

1TX ANT 5 MODE: 26 Tones, RU Index 4

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	19.00	17.0530
Mid	5785	19.45	17.1460
High	5825	19.40	17.1860

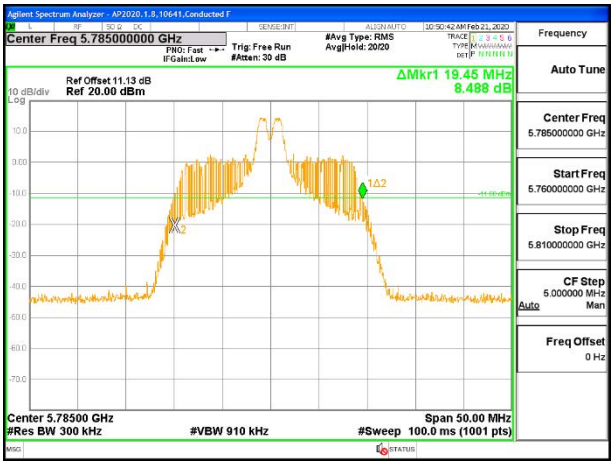

MID CHANNEL 26dB

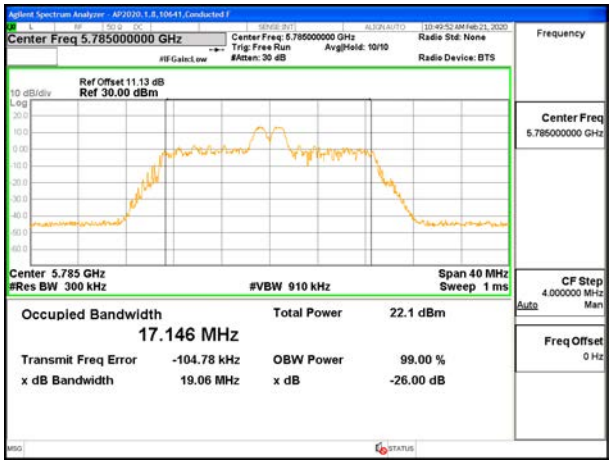

MID CHANNEL OBW

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

1TX ANT 5 MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	20.40	18.535
Mid	5785	20.85	18.306
High	5825	20.70	18.409

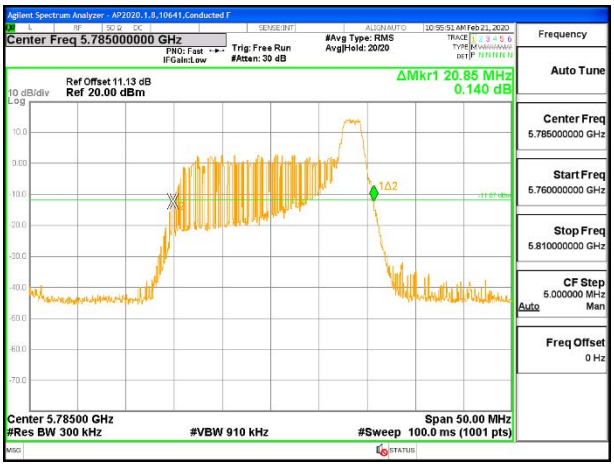

MID CHANNEL 26dB

MID CHANNEL OBW

1TX ANT 5 MODE: 242 Tones, RU Index 61

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	21.50	18.822
Mid	5785	21.45	18.840
High	5825	21.30	18.877

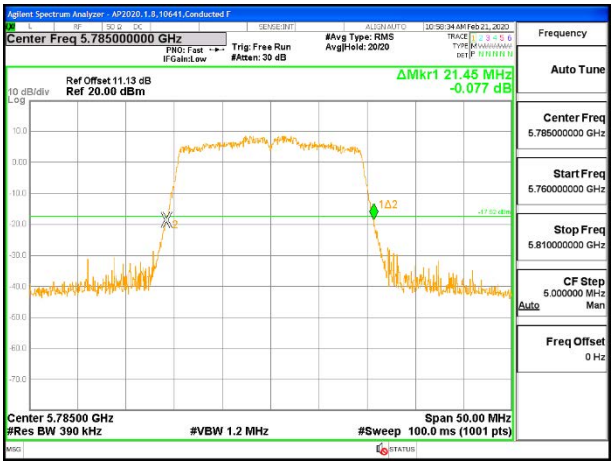

MID CHANNEL 26dB

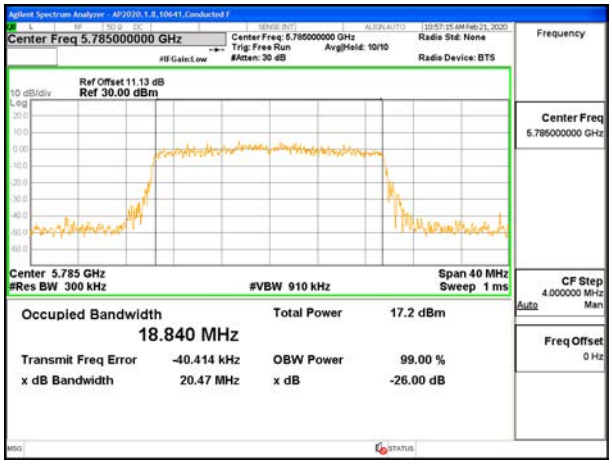

MID CHANNEL OBW

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2TX ANT 6 + ANT 5 OFDMA MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5745	20.20	19.85	18.351	18.332
Mid	5785	20.15	20.00	18.325	18.345
High	5825	19.95	19.60	18.373	18.327

MID CHANNEL 26dB

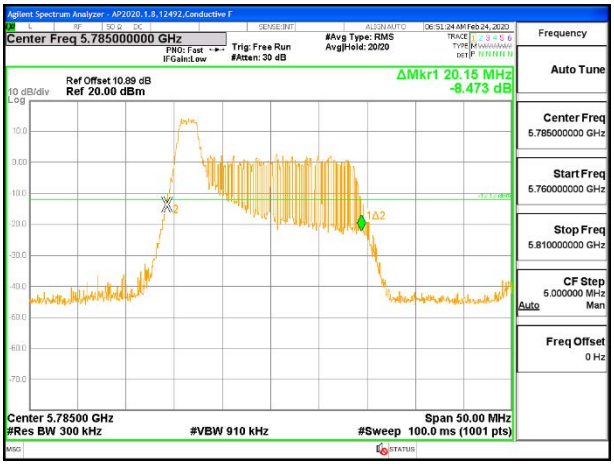

MID CHANNEL [ANT 6]

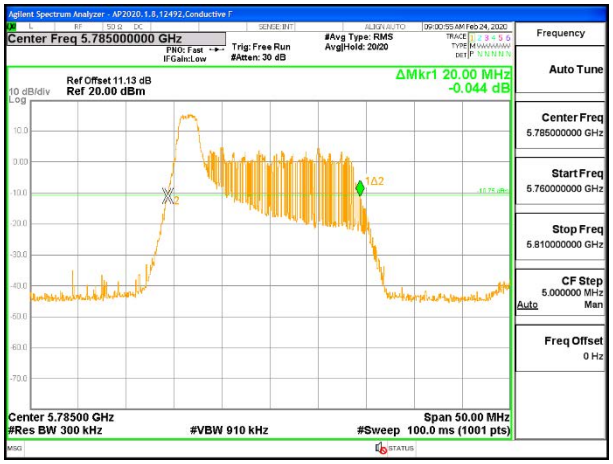

MID CHANNEL [ANT 5]

MID CHANNEL OBW

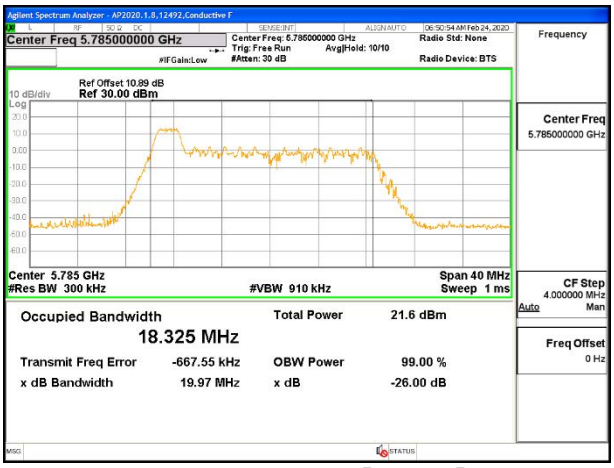

MID CHANNEL [ANT 6]

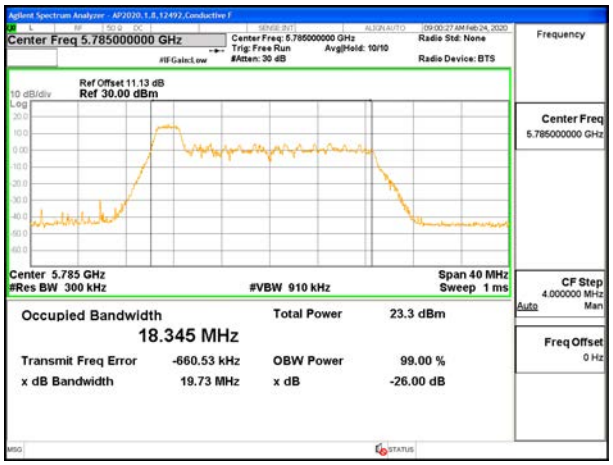

MID CHANNEL [ANT 5]

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2TX ANT 6 + ANT 5 OFDMA MODE: 26 Tones, RU Index 4

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5745	19.30	18.25	17.3310	17.0070
Mid	5785	19.45	18.40	17.2680	16.8790
High	5825	19.50	18.45	17.1690	16.9860

MID CHANNEL 26dB

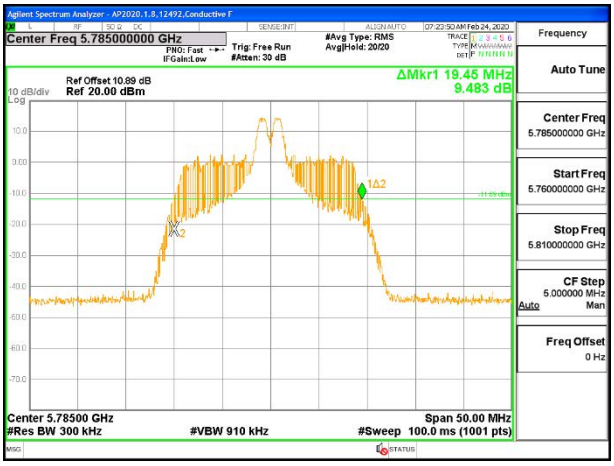

MID CHANNEL [ANT 6]

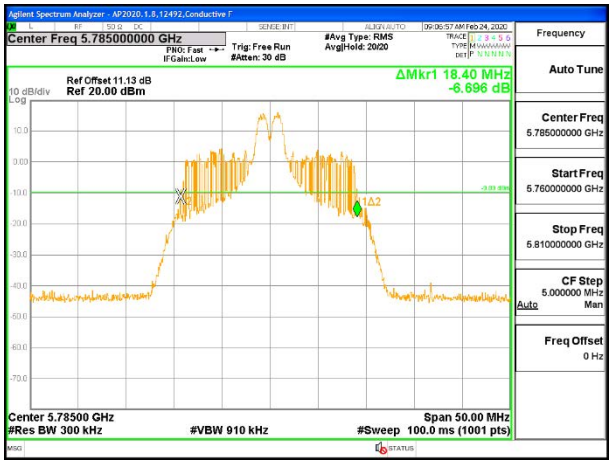

MID CHANNEL [ANT 5]

MID CHANNEL OBW

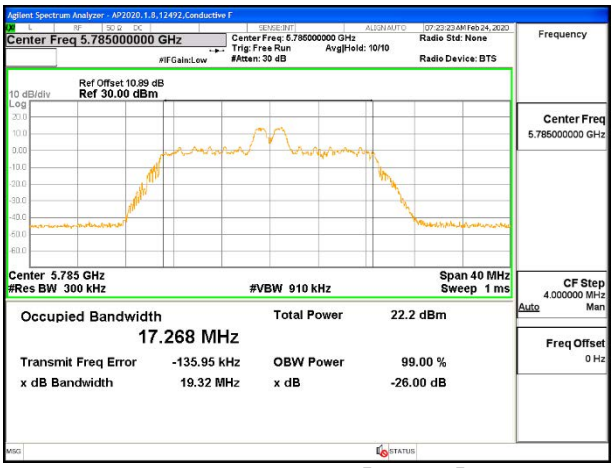

MID CHANNEL [ANT 6]

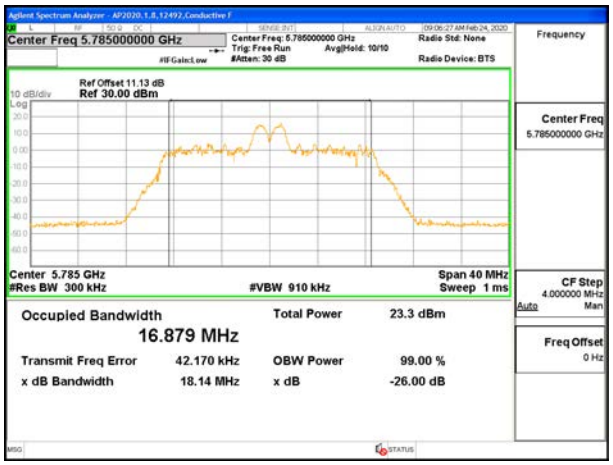

MID CHANNEL [ANT 5]

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2TX ANT 6 + ANT 5 OFDMA MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5745	20.80	20.00	18.679	18.010
Mid	5785	20.55	20.00	18.410	18.262
High	5825	20.85	19.90	18.404	18.305

MID CHANNEL 26dB

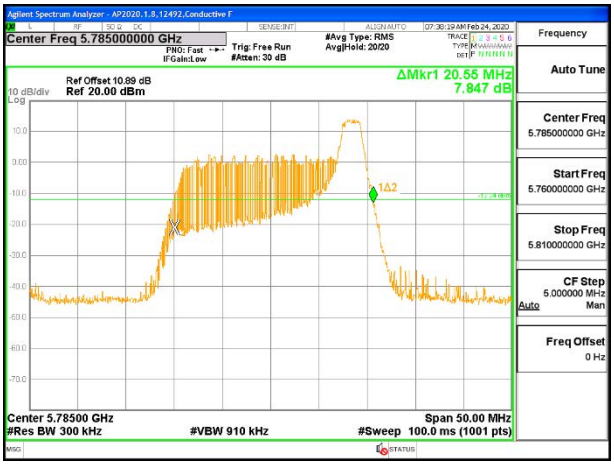

MID CHANNEL [ANT 6]

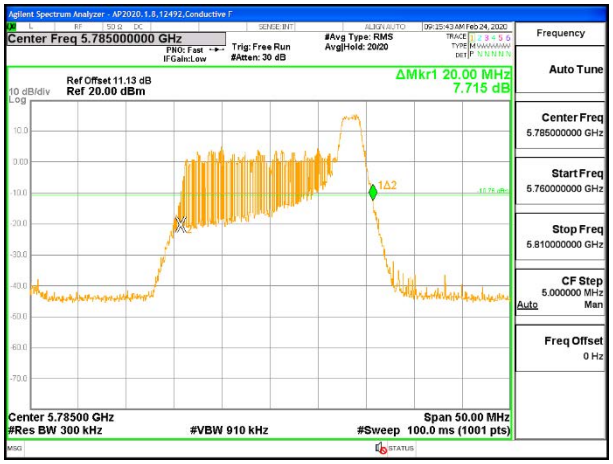

MID CHANNEL [ANT 5]

MID CHANNEL OBW

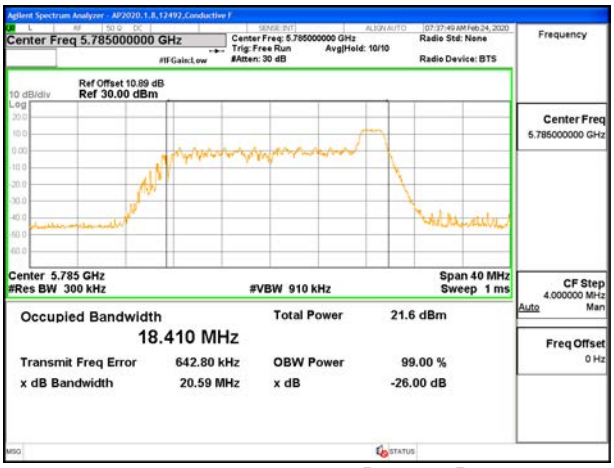

MID CHANNEL [ANT 6]

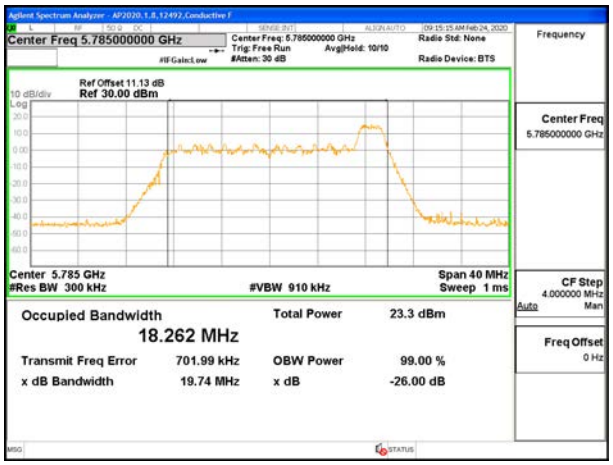

MID CHANNEL [ANT 5]

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2TX ANT 6 + ANT 5 OFDMA MODE: 242 Tones, RU Index 61

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5745	21.35	21.25	18.900	18.854
Mid	5785	21.40	21.20	18.937	18.840
High	5825	21.40	21.30	18.889	18.853

MID CHANNEL 26dB

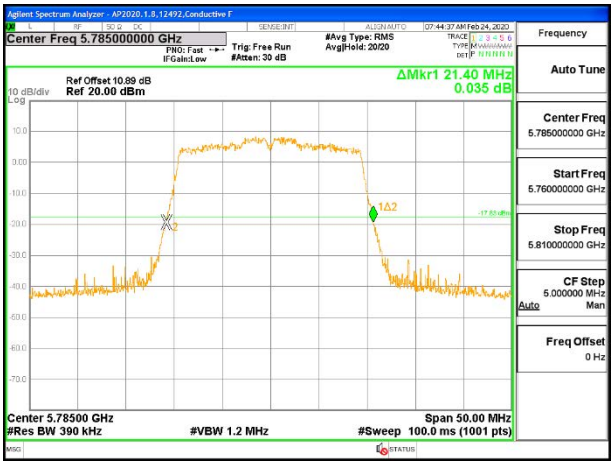

MID CHANNEL [ANT 6]

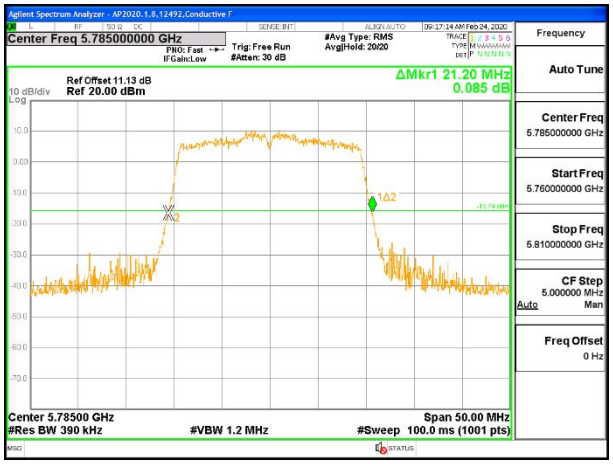

MID CHANNEL [ANT 5]

MID CHANNEL OBW

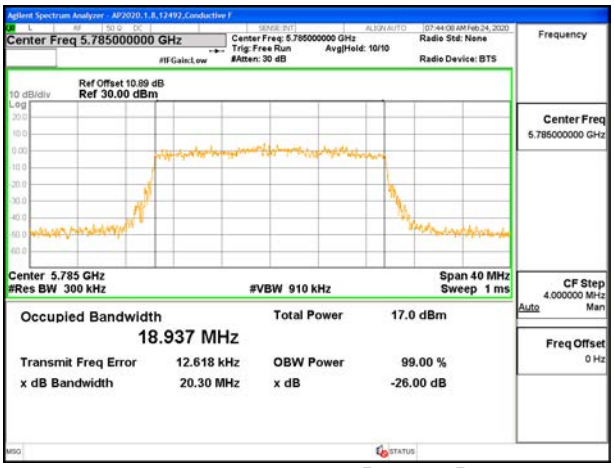

MID CHANNEL [ANT 6]

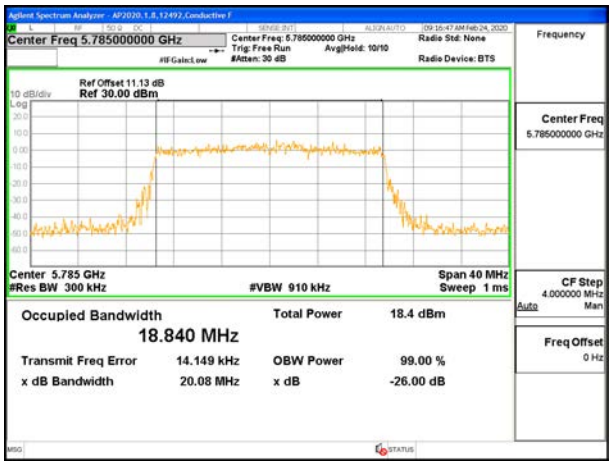

MID CHANNEL [ANT 5]

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.2.23.802.11ax HE40 MODE IN THE 5.8 GHz BAND

1TX ANT 6 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	20.20	18.3790
High	5795	20.30	18.4170

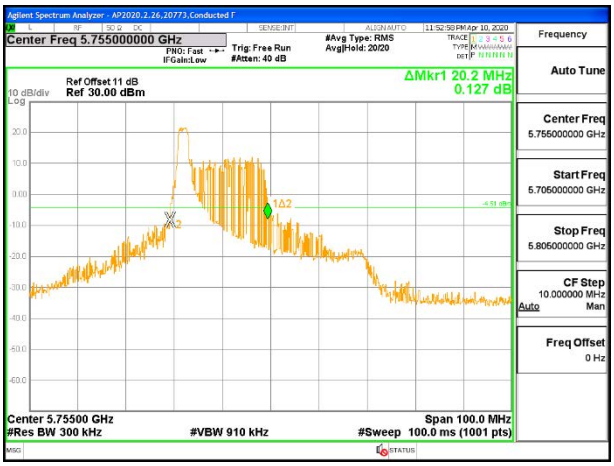

LOW CHANNEL 26dB

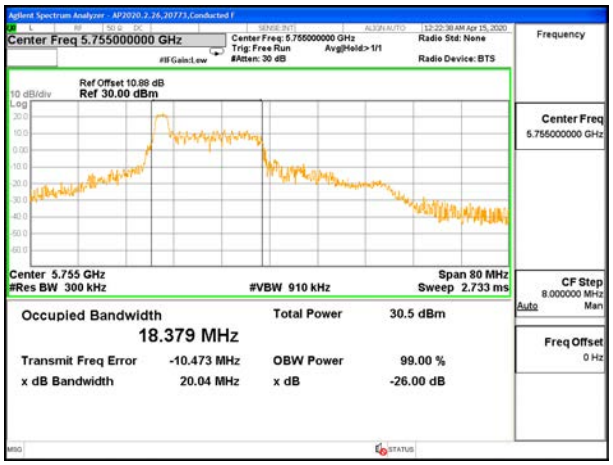

LOW CHANNEL OBW

1TX ANT 6 MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	22.10	20.0040
High	5795	22.10	20.1940

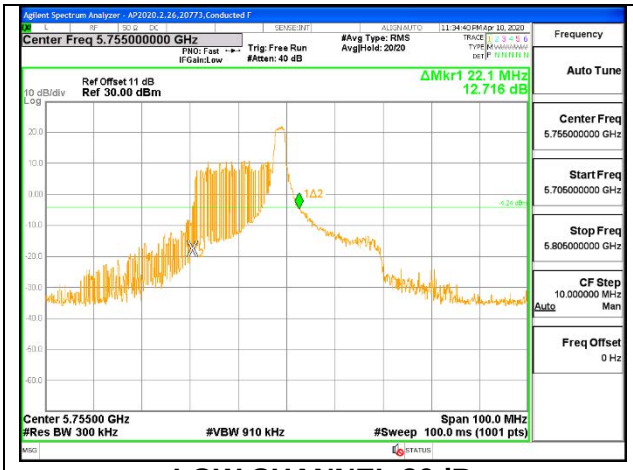

LOW CHANNEL 26dB

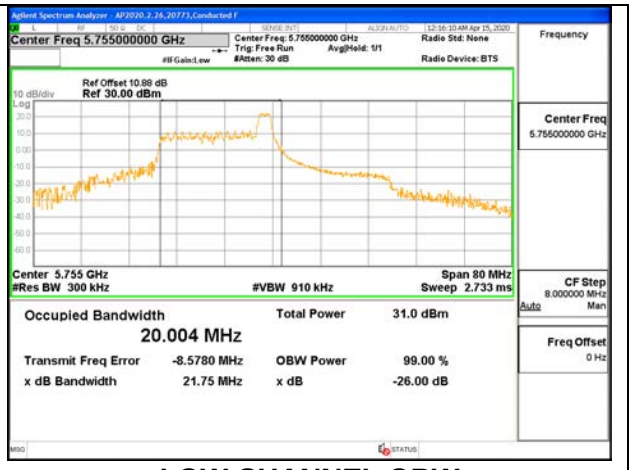

LOW CHANNEL OBW

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

1TX ANT 6 MODE: 26 Tones, RU Index 17

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	20.50	18.7530
High	5795	20.60	18.7020

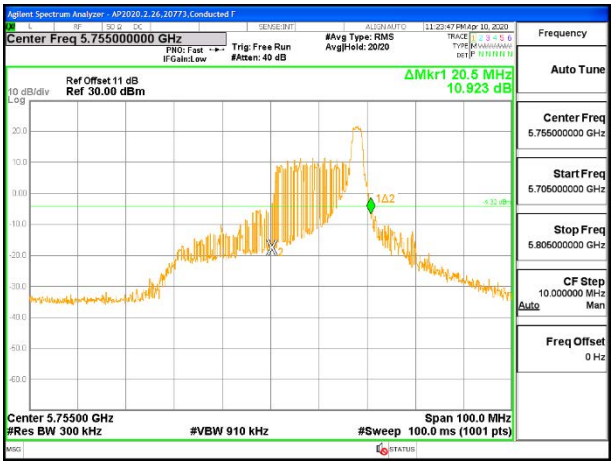

LOW CHANNEL 26dB

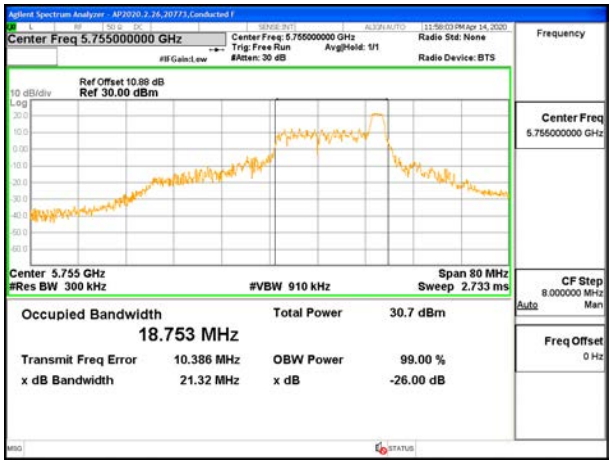

LOW CHANNEL OBW

1TX ANT 6 MODE: 484 Tones, RU Index 65

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	41.20	37.4860
High	5795	40.80	37.4420

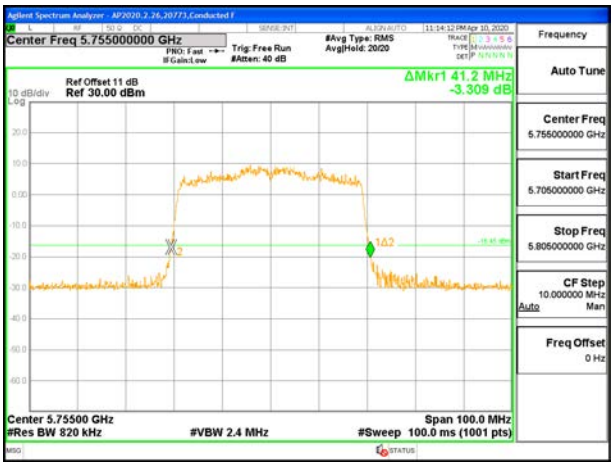

LOW CHANNEL 26dB

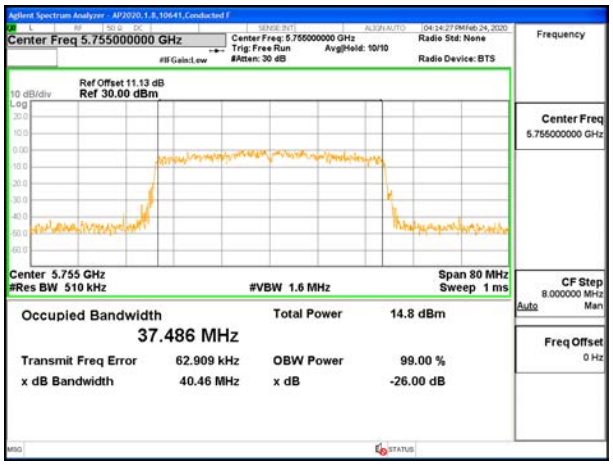

LOW CHANNEL OBW

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

1TX ANT 5 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	19.80	18.3790
High	5795	20.10	18.4170

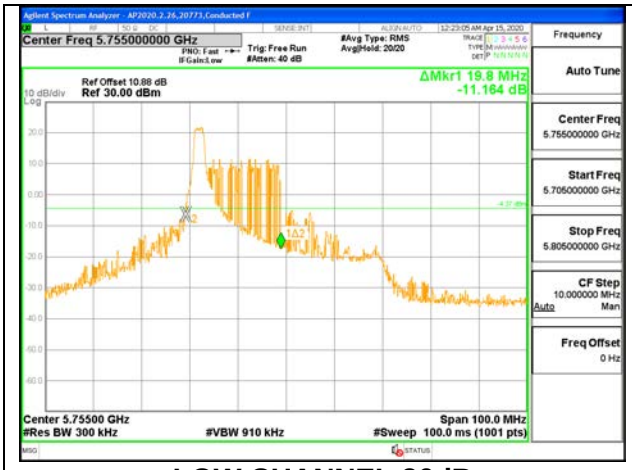

LOW CHANNEL 26dB

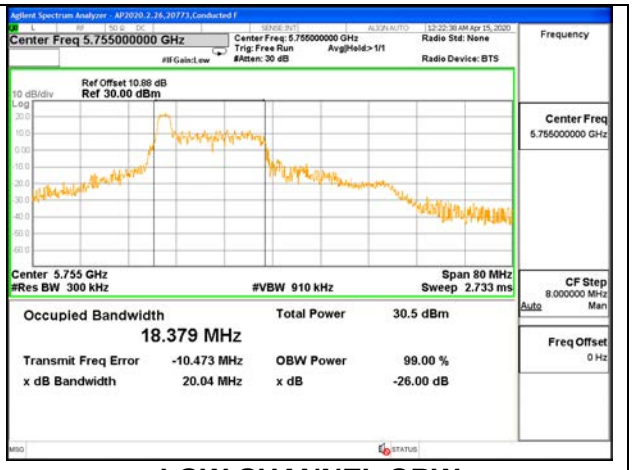

LOW CHANNEL OBW

1TX ANT 5 MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	22.20	20.0040
High	5795	22.50	20.1940

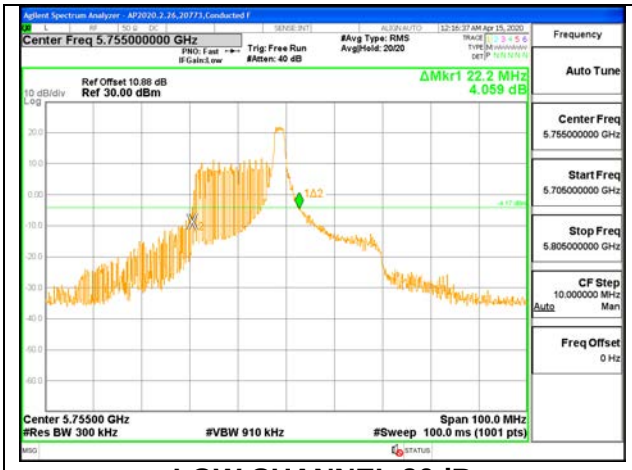

LOW CHANNEL 26dB

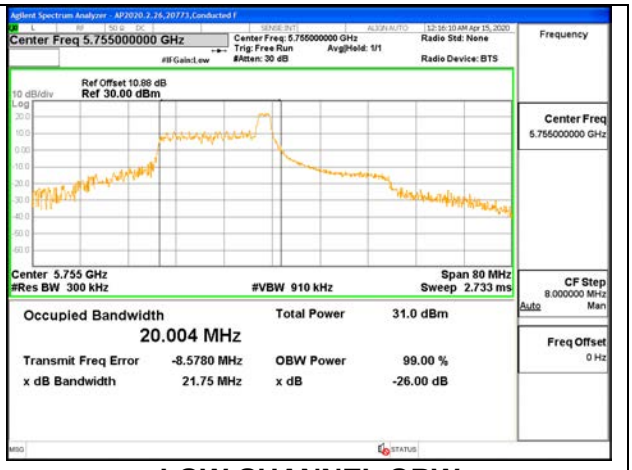

LOW CHANNEL OBW

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

1TX ANT 5 MODE: 26 Tones, RU Index 17

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	21.20	18.7530
High	5795	21.30	18.7020

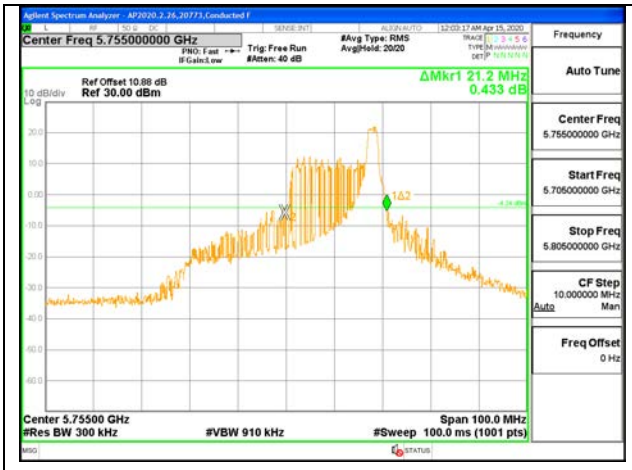

LOW CHANNEL 26dB

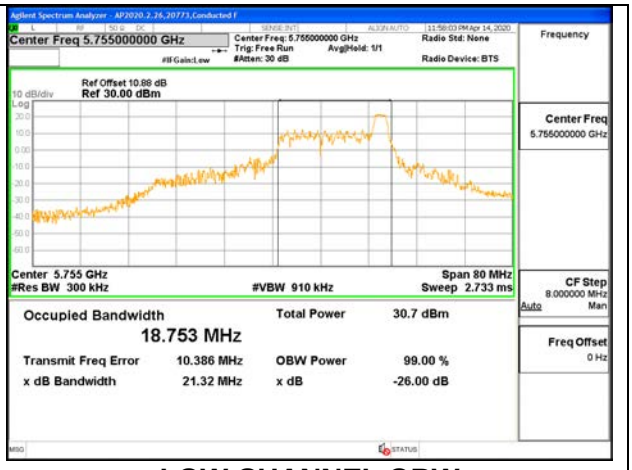

LOW CHANNEL OBW

1TX ANT 5 MODE: 484 Tones, RU Index 65

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	41.00	37.4860
High	5795	40.80	37.4420

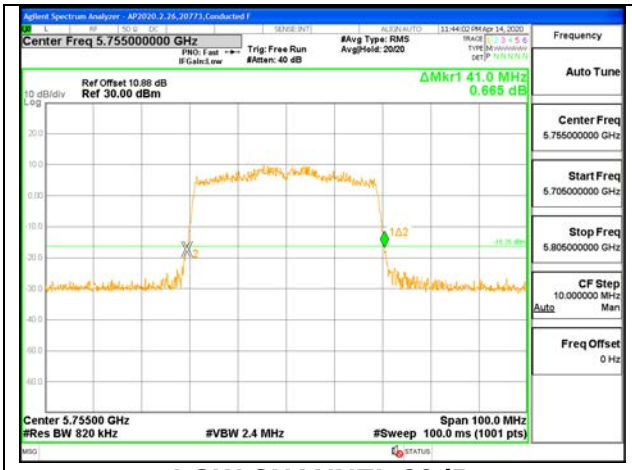

LOW CHANNEL 26dB

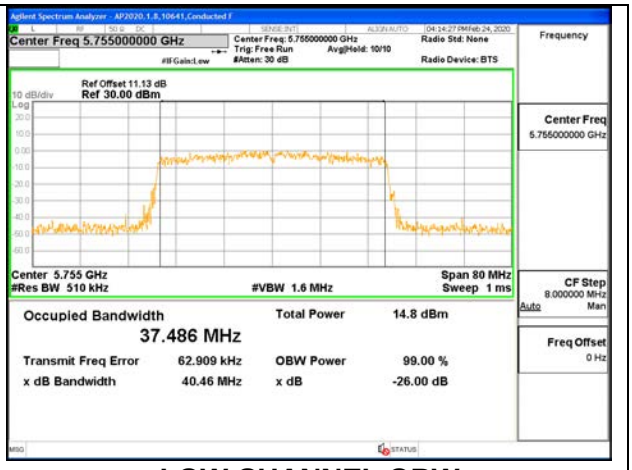

LOW CHANNEL OBW

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2TX ANT 6 + ANT 5 OFDMA MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5755	20.20	19.10	18.2770	18.1830
High	5795	20.60	19.90	18.2380	18.3020

LOW CHANNEL 26dB

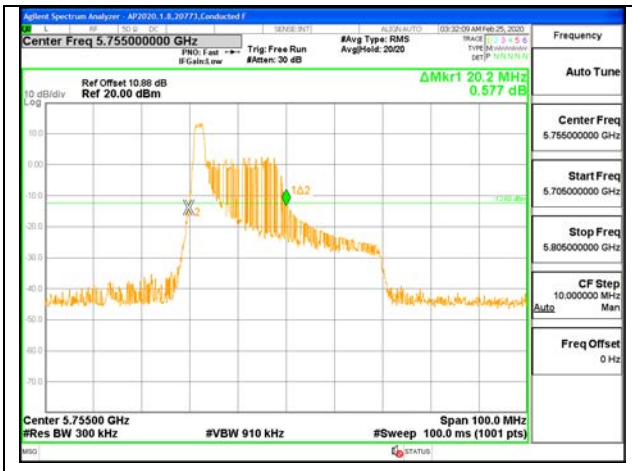

LOW CHANNEL [ANT 6]

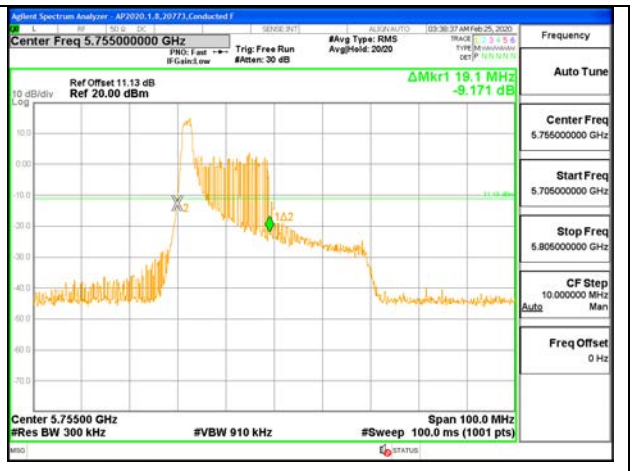

LOW CHANNEL [ANT 5]

LOW CHANNEL OBW

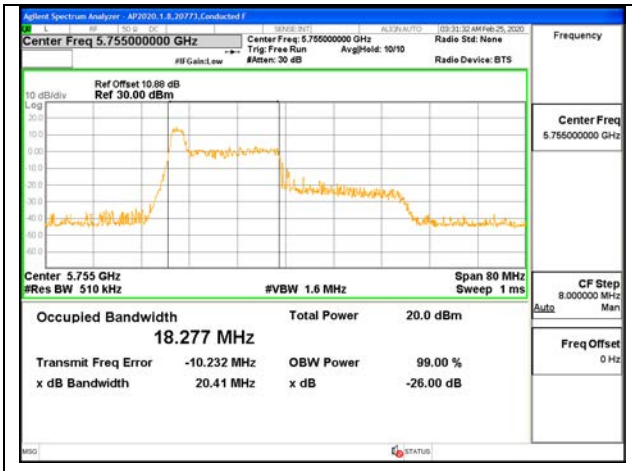

LOW CHANNEL [ANT 6]

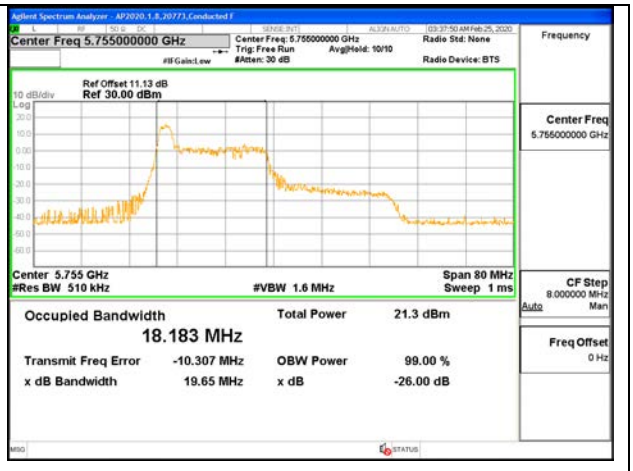

LOW CHANNEL [ANT 5]

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2TX ANT 6 + ANT 5 OFDMA MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5755	22.50	23.00	21.0820	21.1730
High	5795	22.30	22.30	21.2440	21.2160

LOW CHANNEL 26dB

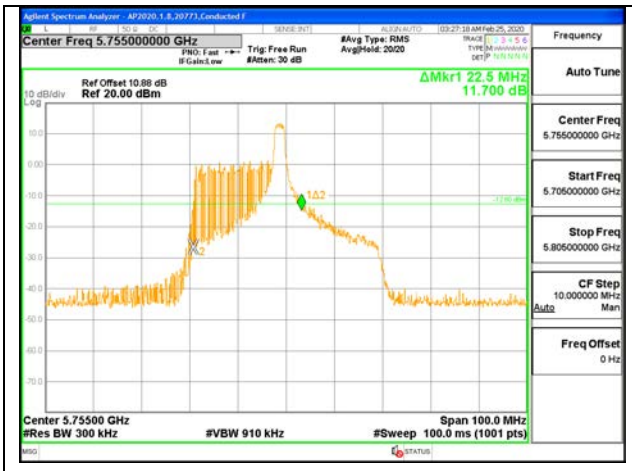

LOW CHANNEL [ANT 6]

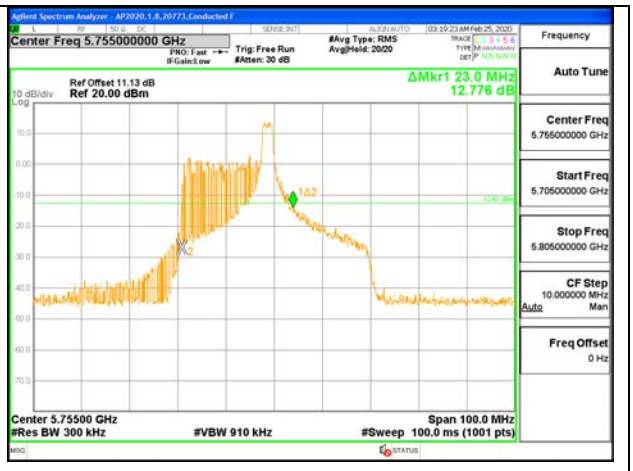

LOW CHANNEL [ANT 5]

LOW CHANNEL OBW

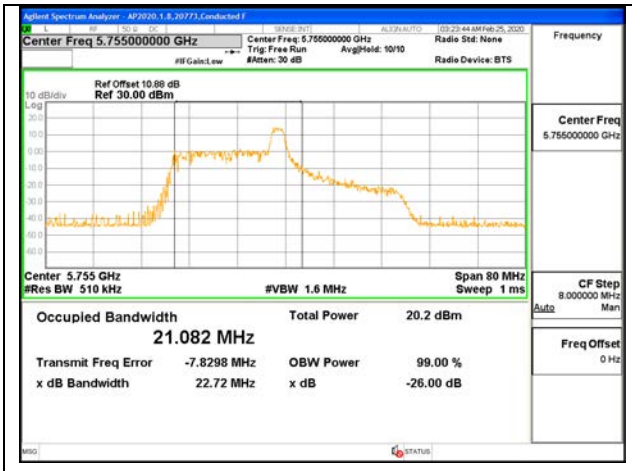

LOW CHANNEL [ANT 6]

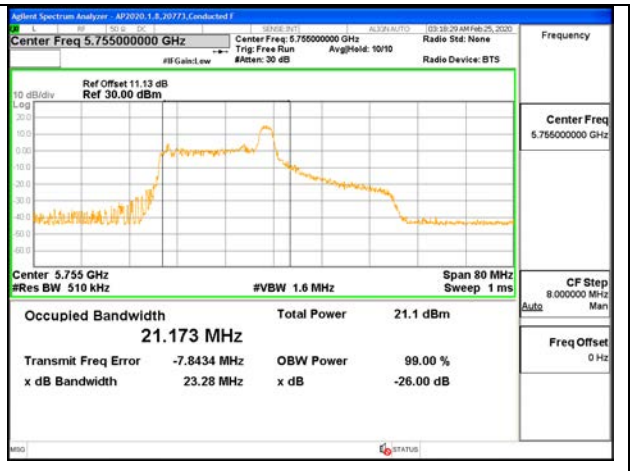

LOW CHANNEL [ANT 5]

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2TX ANT 6 + ANT 5 OFDMA MODE: 26 Tones, RU Index 17

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5755	20.50	19.80	18.4010	18.3190
High	5795	20.40	19.90	18.4740	18.2670

LOW CHANNEL 26dB

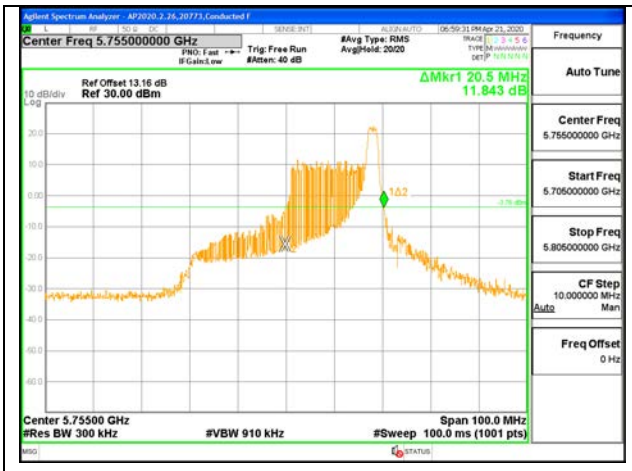

LOW CHANNEL [ANT 6]

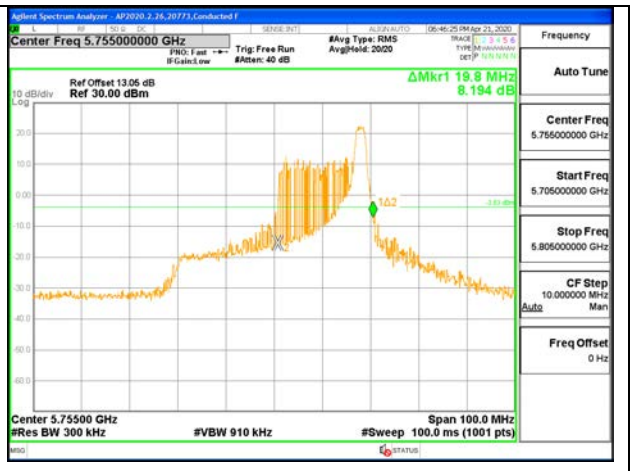

LOW CHANNEL [ANT 5]

LOW CHANNEL OBW

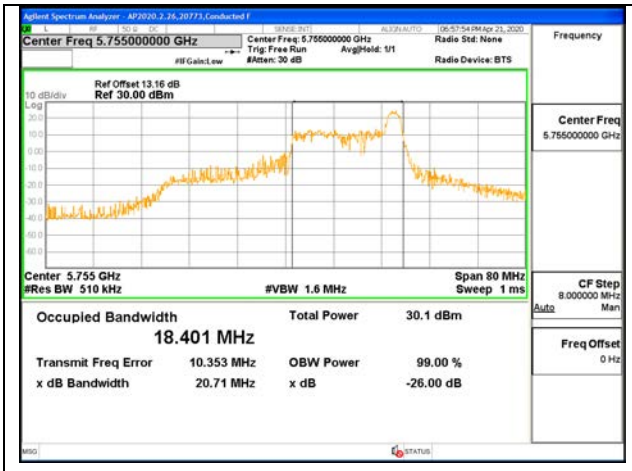

LOW CHANNEL [ANT 6]

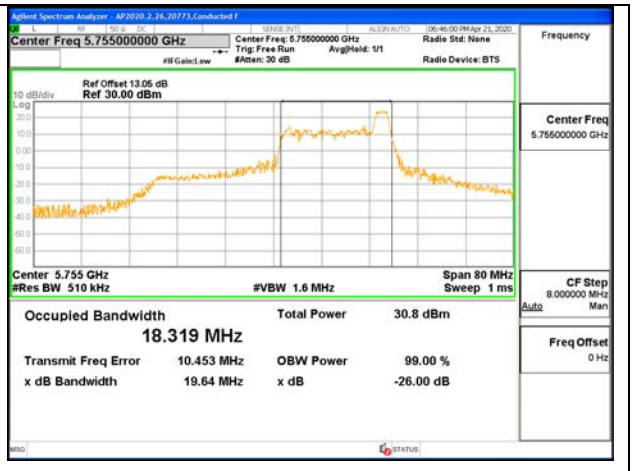

LOW CHANNEL [ANT 5]

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2TX ANT 6 + ANT 5 OFDMA MODE: 484 Tones, RU Index 65

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5755	41.00	40.80	37.3320	37.4280
High	5795	40.90	40.90	37.3660	37.5880

LOW CHANNEL 26dB

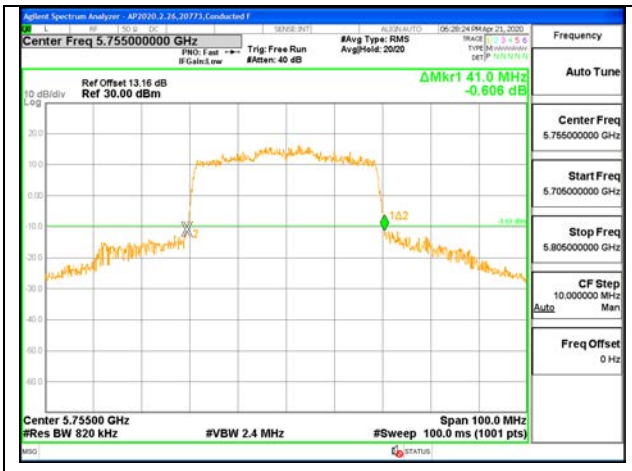

LOW CHANNEL [ANT 6]

LOW CHANNEL [ANT 5]

LOW CHANNEL OBW

LOW CHANNEL [ANT 6]

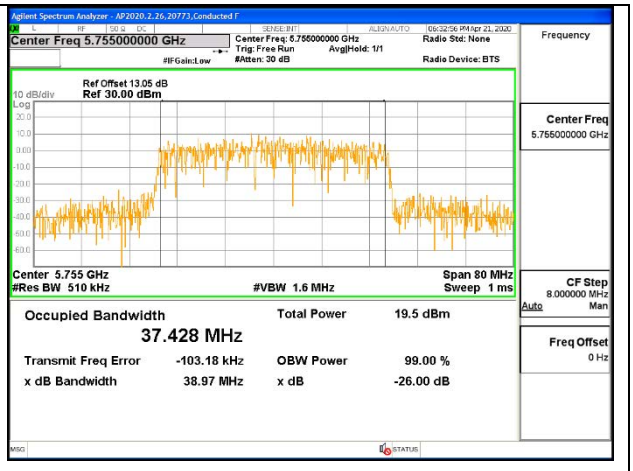

LOW CHANNEL [ANT 5]

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.2.24.802.11ax HE80 MODE IN THE 5.8 GHz BAND

1TX ANT 6 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5775	20.20	18.0770

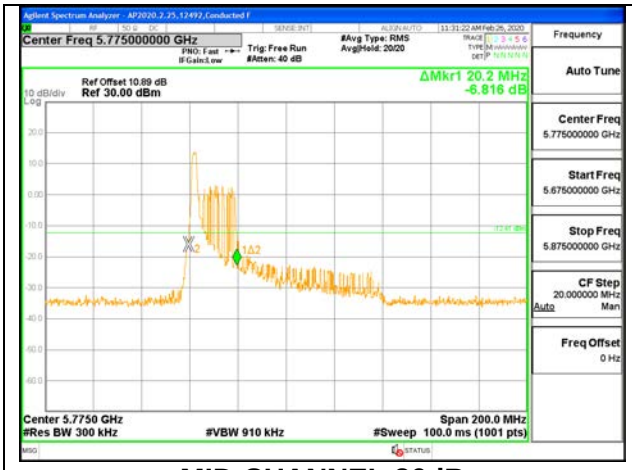

MID CHANNEL 26dB

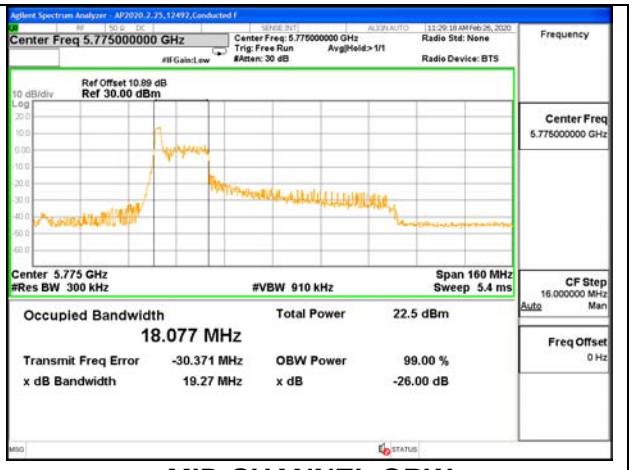

MID CHANNEL OBW

1TX ANT 6 MODE: 26 Tones, RU Index 18

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5775	39.20	37.9670

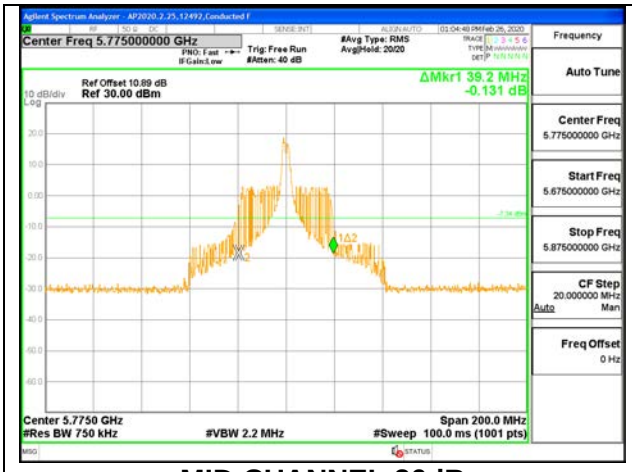

MID CHANNEL 26dB

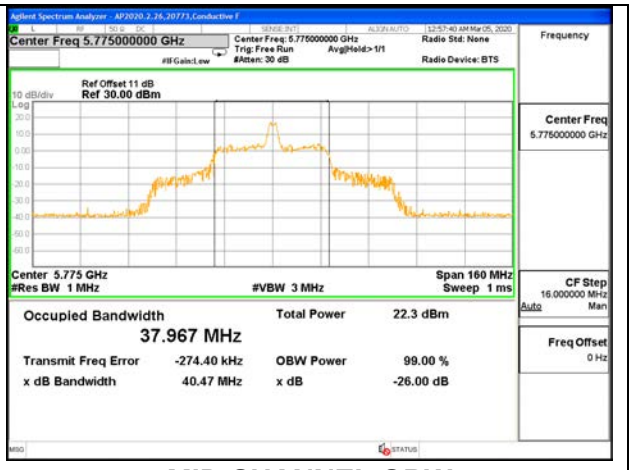

MID CHANNEL OBW

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

1TX ANT 6 MODE: 26 Tones, RU Index 36

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5775	20.90	18.7720

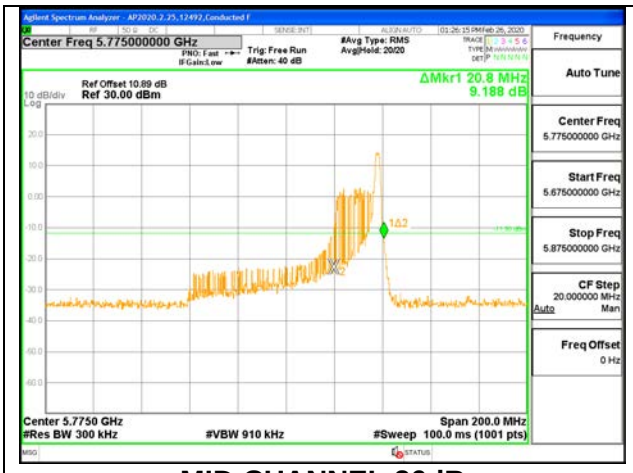

MID CHANNEL 26dB

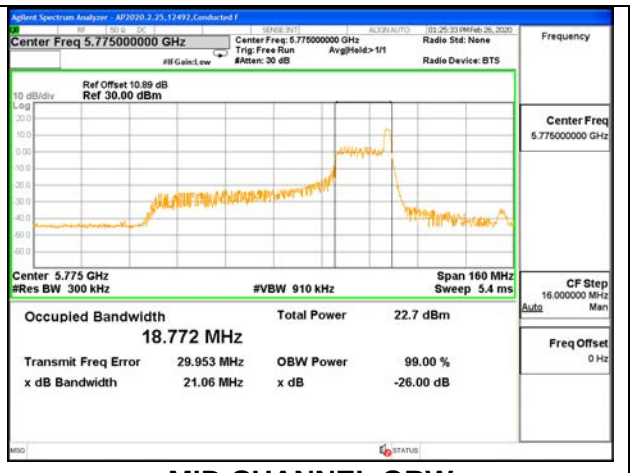

MID CHANNEL OBW

1TX ANT 6 MODE: 996 Tones, RU Index 67

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5775	82.60	76.9130

MID CHANNEL 26dB

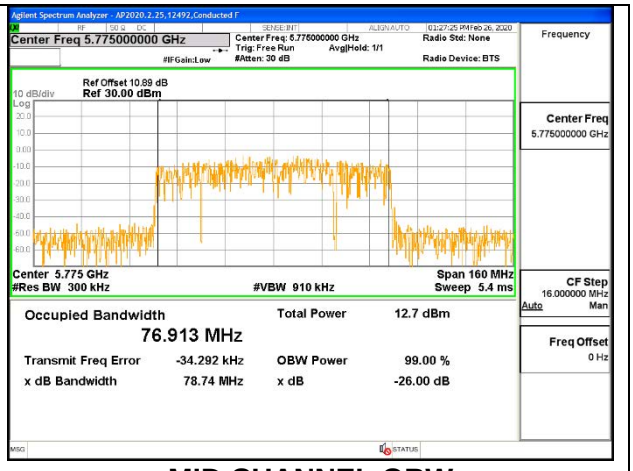

MID CHANNEL OBW

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

1TX ANT 5 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5775	20.20	18.0630

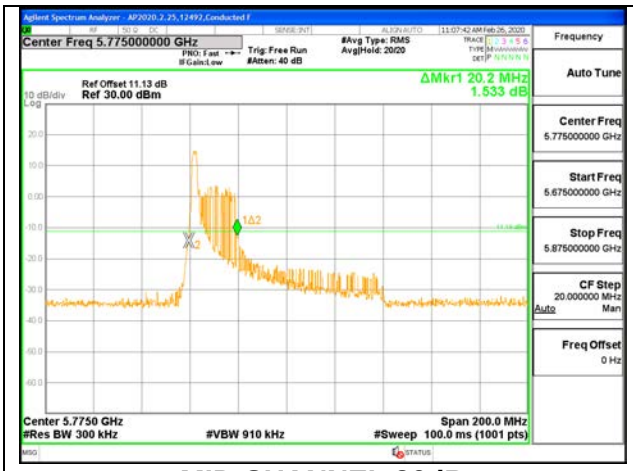

MID CHANNEL 26dB

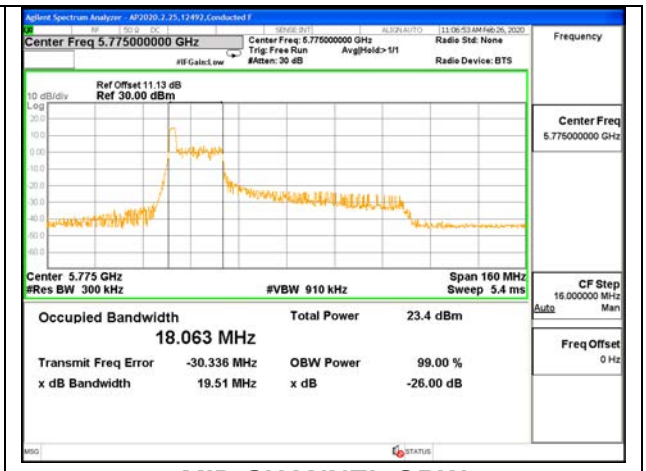

MID CHANNEL OBW

1TX ANT 5 MODE: 26 Tones, RU Index 18

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5775	39.20	37.3930

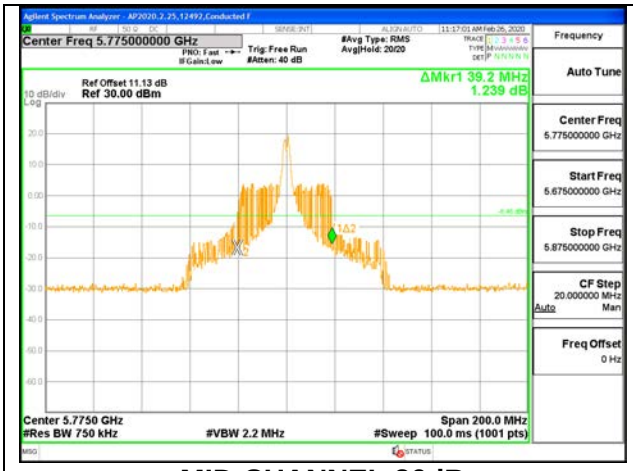

MID CHANNEL 26dB

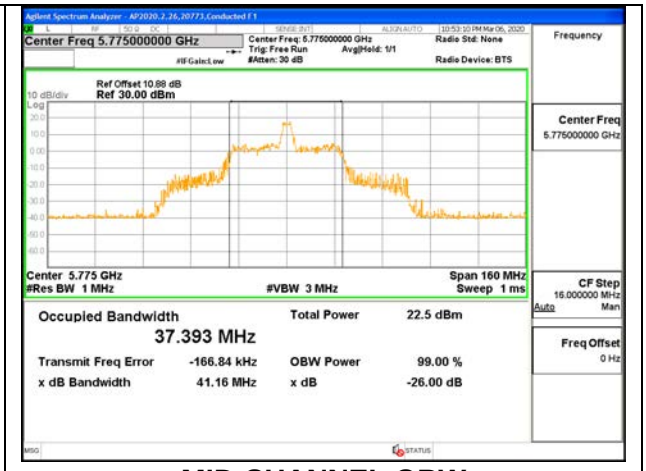

MID CHANNEL OBW

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

1TX ANT 5 MODE: 26 Tones, RU Index 36

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5775	21.40	18.3060

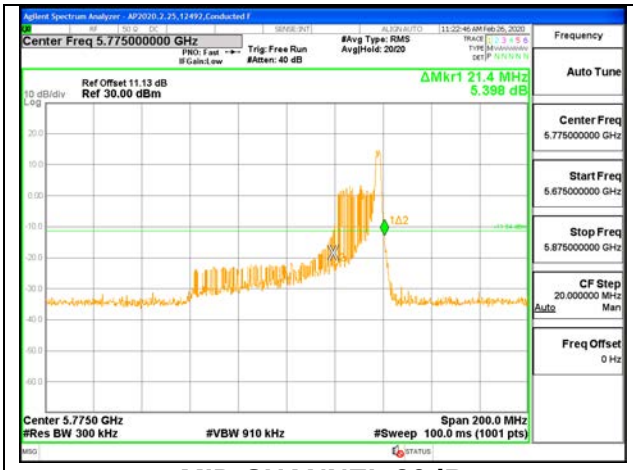

MID CHANNEL 26dB

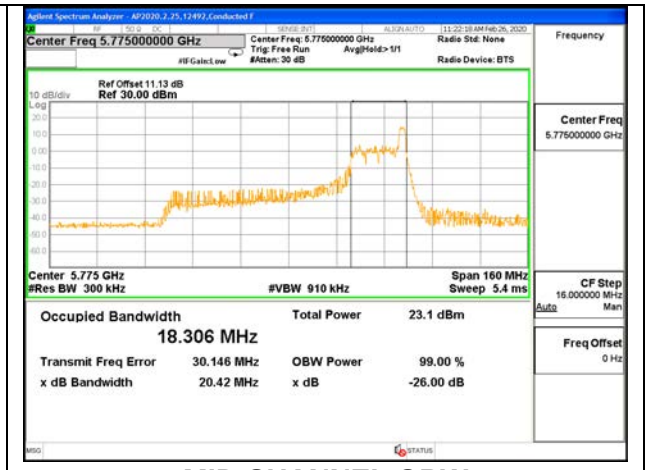

MID CHANNEL OBW

1TX ANT 5 MODE: 996 Tones, RU Index 67

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5775	83.00	76.7266

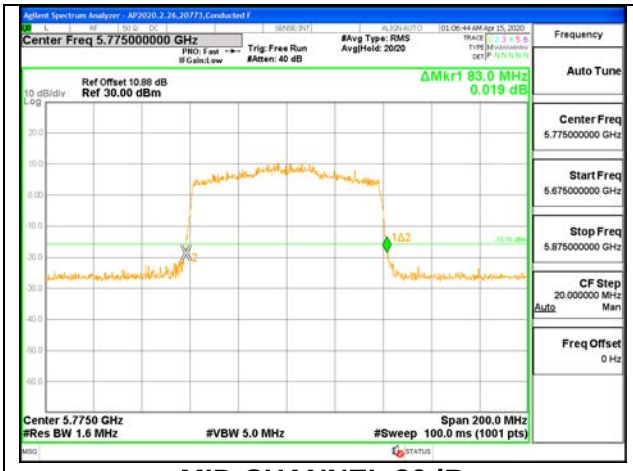

MID CHANNEL 26dB

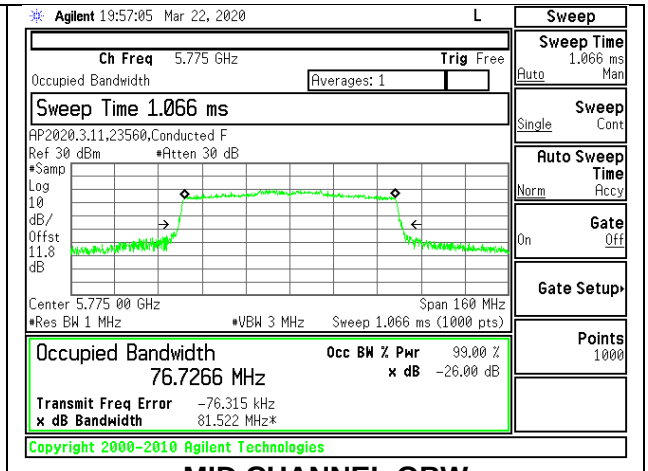

MID CHANNEL OBW

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2TX ANT 6 + ANT 5 OFDMA MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Mid	5775	19.80	20.40	18.0120	18.0400

MID CHANNEL 26dB

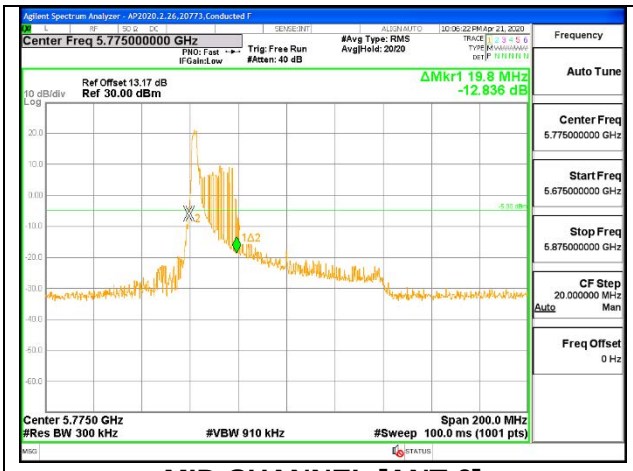

MID CHANNEL [ANT 6]

MID CHANNEL [ANT 5]

MID CHANNEL OBW

MID CHANNEL [ANT 6]

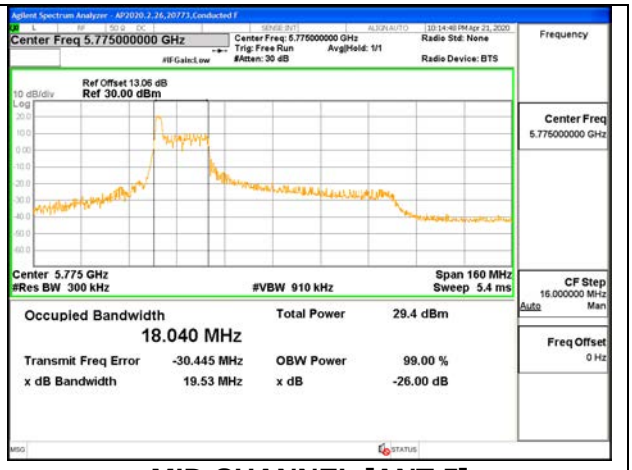

MID CHANNEL [ANT 5]

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2TX ANT 6 + ANT 5 OFDMA MODE: 26 Tones, RU Index 18

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Mid	5775	39.80	38.60	36.3830	36.3760

MID CHANNEL 26dB

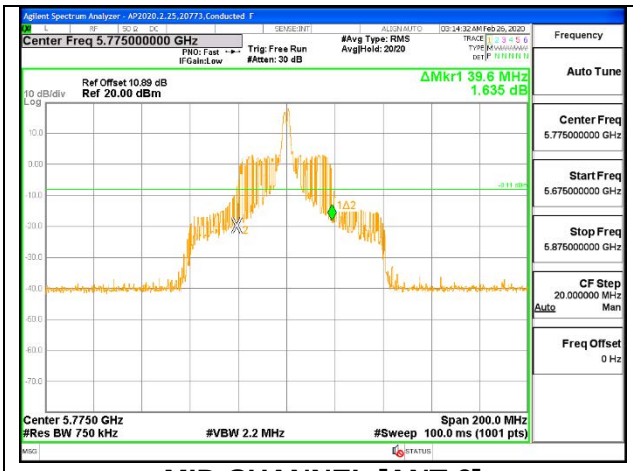

MID CHANNEL [ANT 6]

MID CHANNEL [ANT 5]

MID CHANNEL OBW

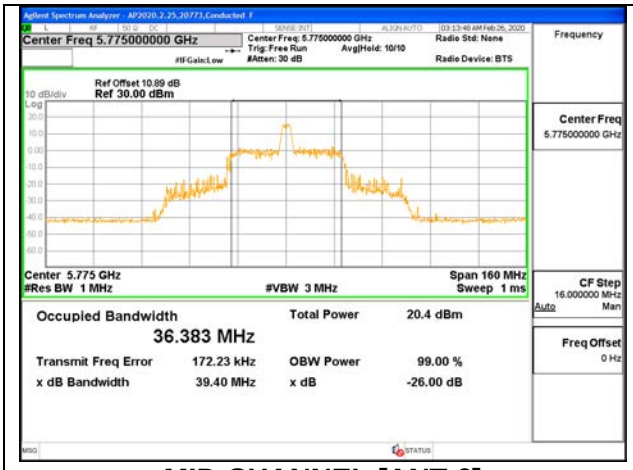

MID CHANNEL [ANT 6]

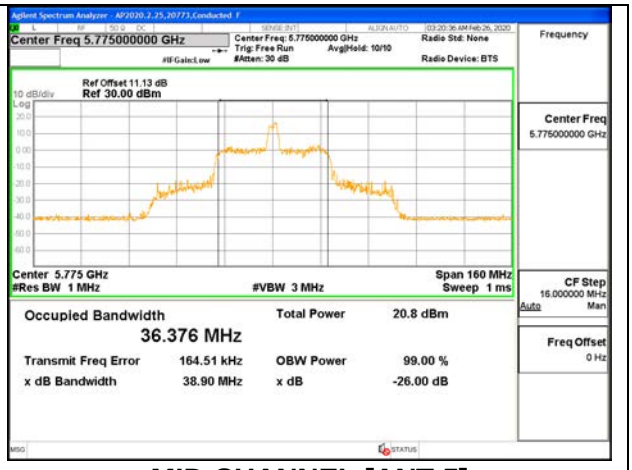

MID CHANNEL [ANT 5]

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2TX ANT 6 + ANT 5 OFDMA MODE: 26 Tones, RU Index 36

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Mid	5775	21.20	20.00	18.2110	18.0350

MID CHANNEL 26dB

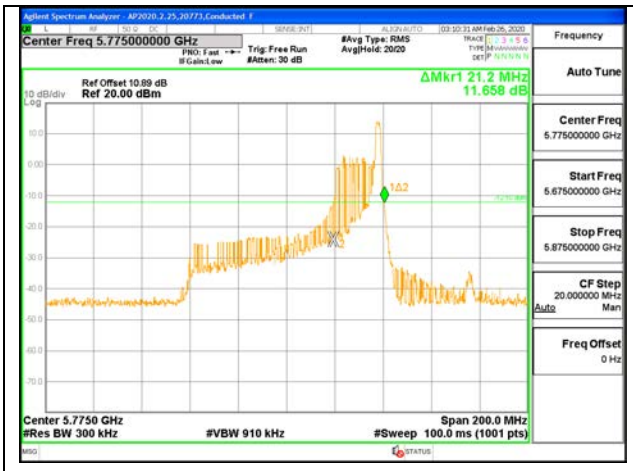

MID CHANNEL [ANT 6]

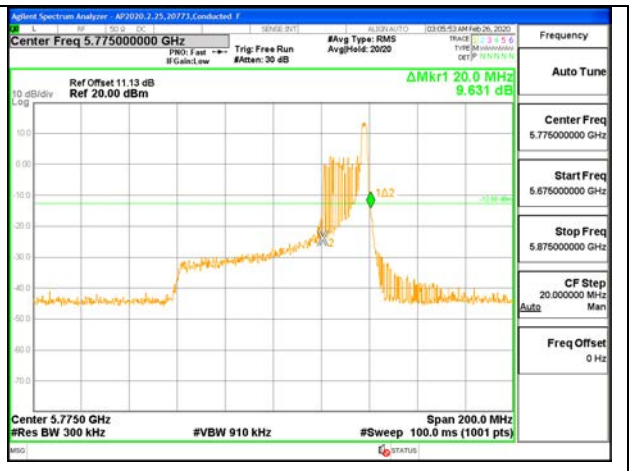

MID CHANNEL [ANT 5]

MID CHANNEL OBW

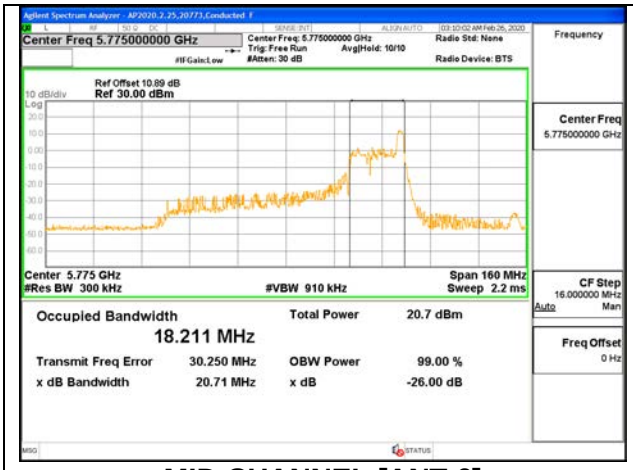

MID CHANNEL [ANT 6]

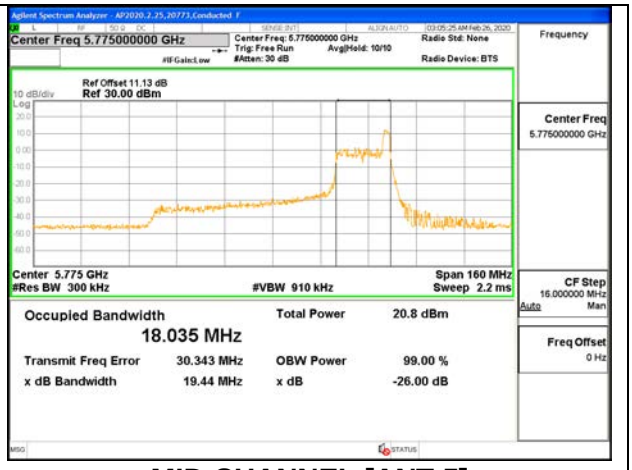

MID CHANNEL [ANT 5]

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2TX ANT 6 + ANT 5 OFDMA MODE: 996 Tones, RU Index 67

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Mid	5775	83.00	82.20	76.5400	76.6390

MID CHANNEL 26dB

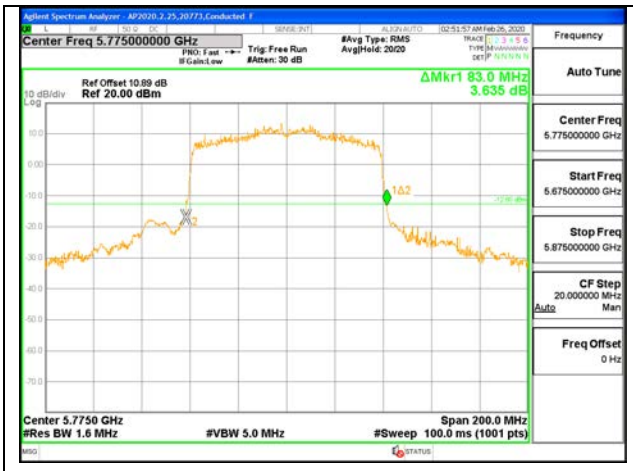

MID CHANNEL [ANT 6]

MID CHANNEL [ANT 5]

MID CHANNEL OBW

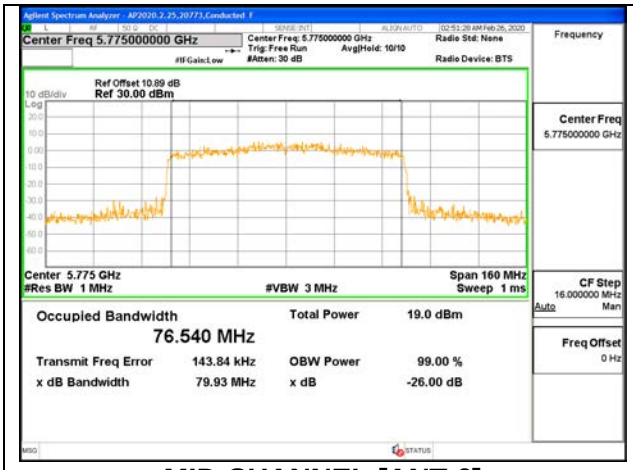

MID CHANNEL [ANT 6]

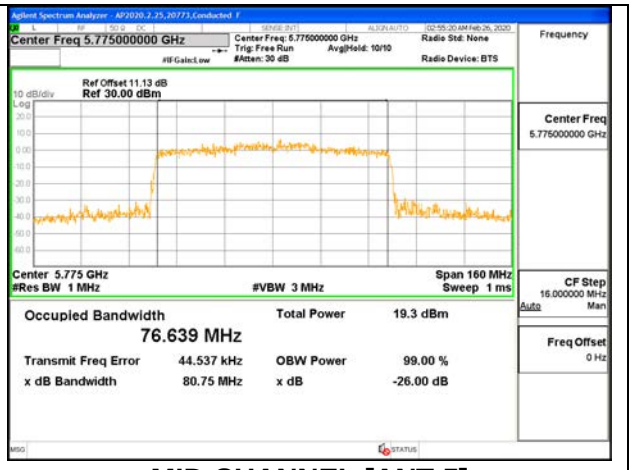

MID CHANNEL [ANT 5]

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.3. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Note: No 6dB emission bandwidth located after 5725MHz.

11ax HE20 Mode RU index 0, 4
11ax HE40 Mode RU index 0, 8
11ax HE80 Mode RU index 0, 18

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.3.1. 802.11n HT20 MODE IN THE 5.8 GHz BAND

1TX ANT 6 MODE

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	17.654	0.5
Mid	5785	17.599	0.5
High	5825	17.592	0.5
144	5720	3.790	0.5

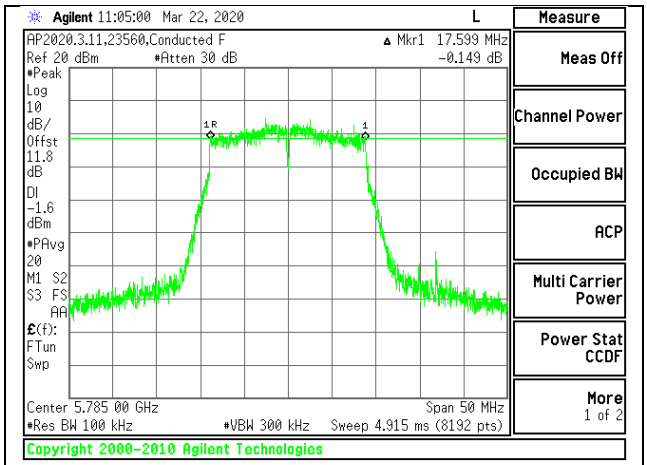

MID CHANNEL

1TX ANT 5 MODE

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	17.550	0.5
Mid	5785	17.568	0.5
High	5825	17.629	0.5
144	5720	3.875	0.5

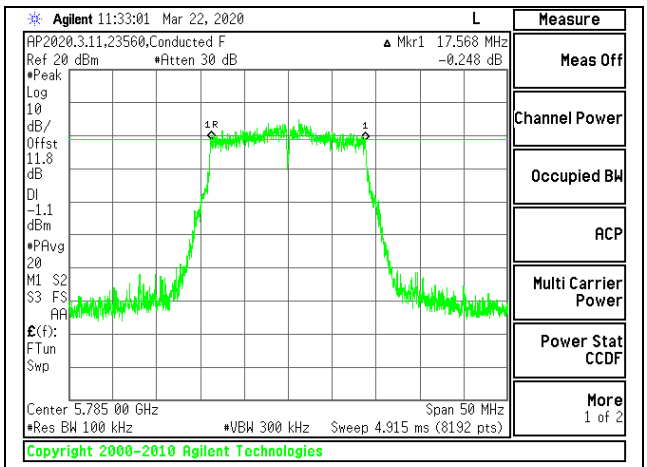

MID CHANNEL

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2TX ANT 6 + ANT 5 CDD MODE

Channel	Frequency (MHz)	6 dB Bandwidth Antenna 6 (MHz)	6 dB Bandwidth Antenna 5 (MHz)	Minimum Limit (MHz)
Low	5745	17.580	17.611	0.5
Mid	5785	17.617	17.568	0.5
High	5825	17.574	17.556	0.5
144	5720	3.895	3.880	0.5

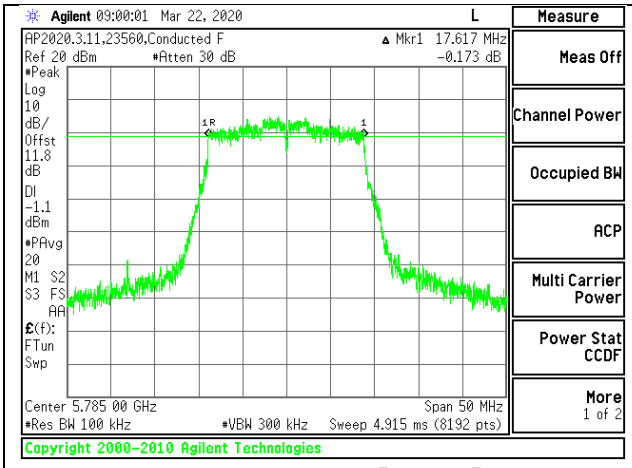

MID CHANNEL [ANT 6]

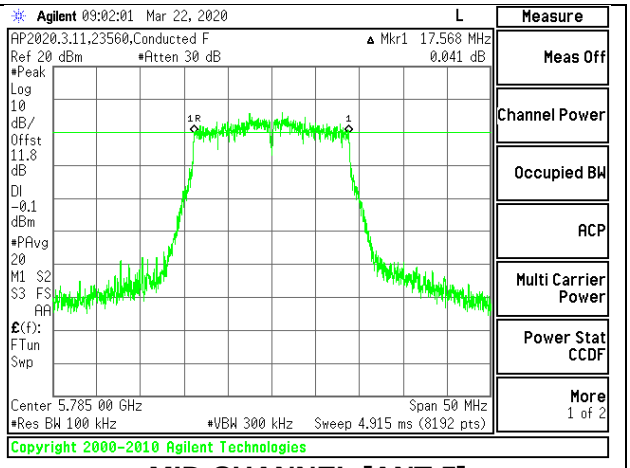

MID CHANNEL [ANT 5]

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.3.2. 802.11n HT40 MODE IN THE 5.8 GHz BAND

1TX ANT 6 MODE

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5755	35.734	0.5
High	5795	35.368	0.5
142	5710	3.230	0.5

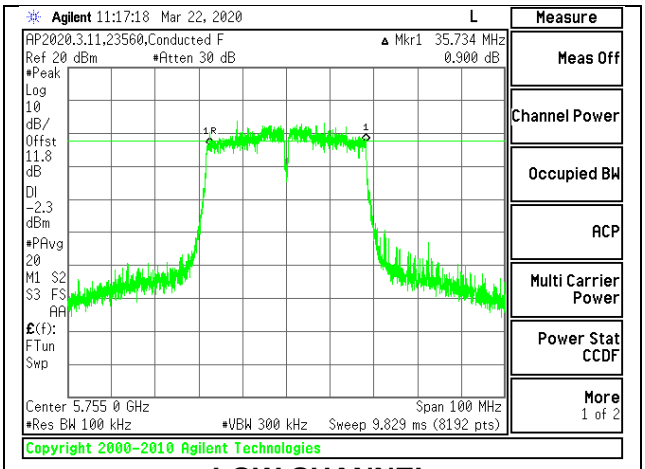

LOW CHANNEL

1TX ANT 5 MODE

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5755	36.027	0.5
High	5795	35.917	0.5
142	5710	3.280	0.5

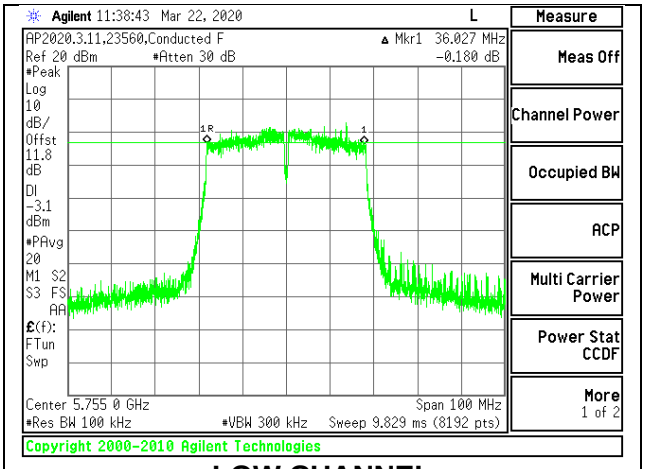

LOW CHANNEL

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2TX ANT 6 + ANT 5 CDD MODE

Channel	Frequency (MHz)	6 dB Bandwidth Antenna 6 (MHz)	6 dB Bandwidth Antenna 5 (MHz)	Minimum Limit (MHz)
Low	5755	35.710	36.710	0.5
High	5795	36.357	35.173	0.5
142	5710	2.570	3.270	0.5

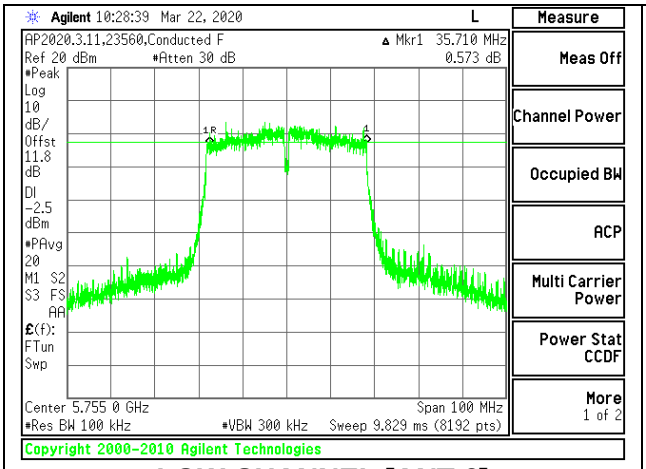

LOW CHANNEL [ANT 6]

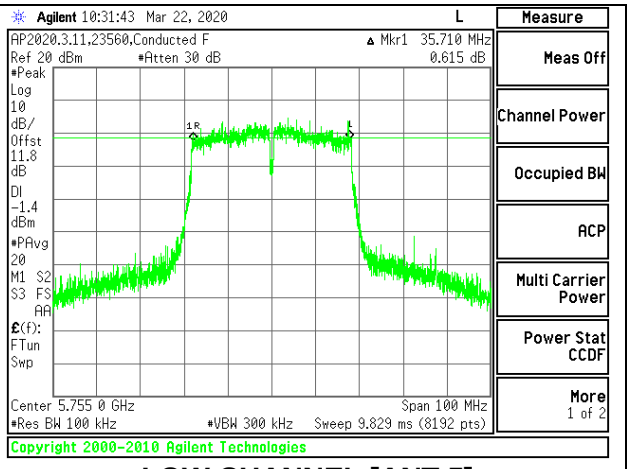

LOW CHANNEL [ANT 5]

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.3.3. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

1TX ANT 6 MODE

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Mid	5775	75.204	0.5
138	5690	3.100	0.5

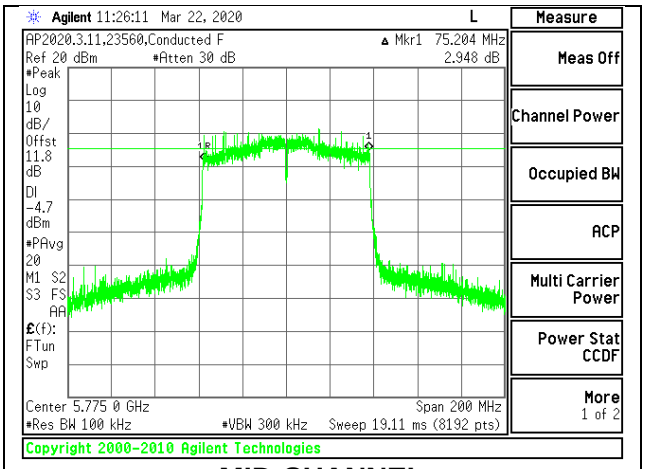

MID CHANNEL

1TX ANT 5 MODE

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Mid	5775	75.131	0.5
138	5690	3.160	0.5

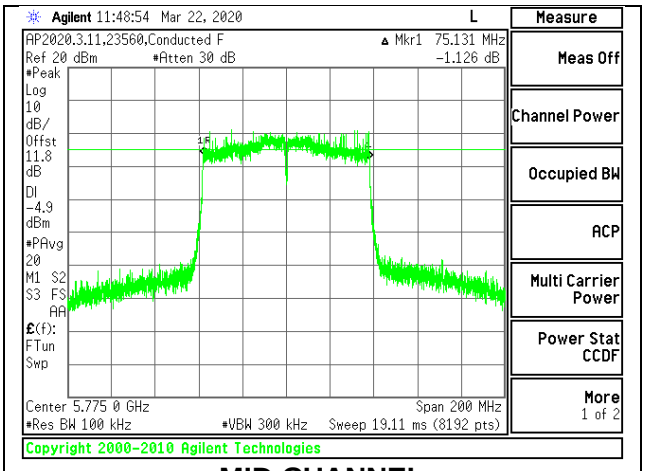

MID CHANNEL

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2TX ANT 6 + ANT 5 CDD MODE

Channel	Frequency (MHz)	6 dB Bandwidth Antenna 6 (MHz)	6 dB Bandwidth Antenna 5 (MHz)	Minimum Limit (MHz)
Mid	5775	73.984	75.229	0.5
138	5690	3.080	3.220	0.5

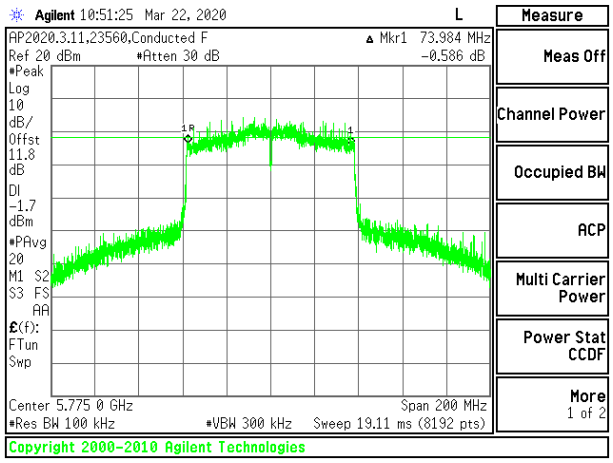

MID CHANNEL [ANT 6]

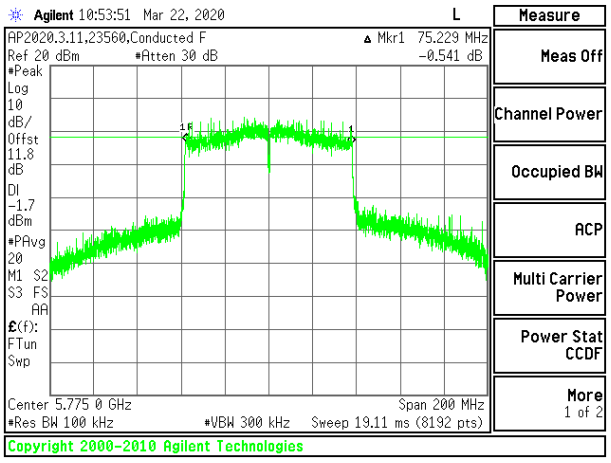

MID CHANNEL [ANT 5]

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.3.4. 802.11ax HE20 MODE IN THE 5.8 GHz BAND

1TX ANT 6 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	2.033	0.5
Mid	5785	2.033	0.5
High	5825	2.124	0.5

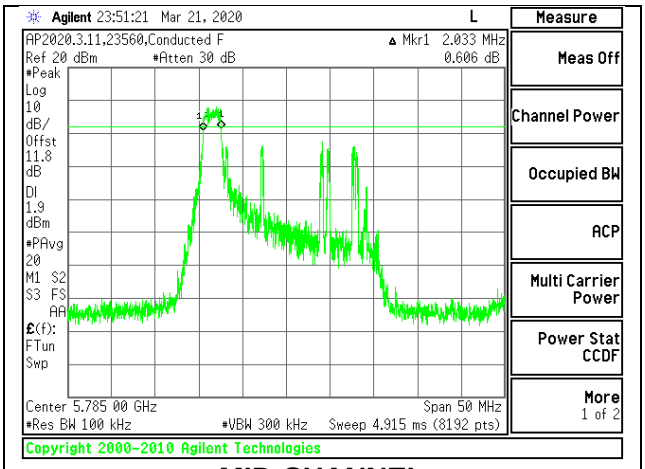

MID CHANNEL

1TX ANT 6 MODE: 26 Tones, RU Index 4

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	2.570	0.5
Mid	5785	2.600	0.5
High	5825	2.582	0.5

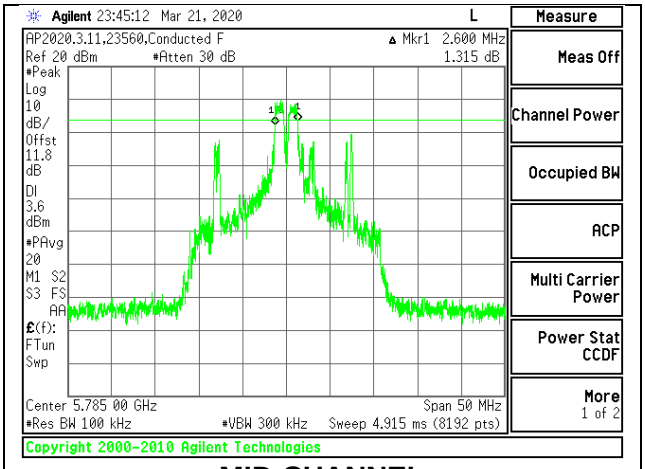

MID CHANNEL

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

1TX ANT 6 MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	1.984	0.5
Mid	5785	2.082	0.5
High	5825	1.996	0.5
144	5720	2.021	0.5

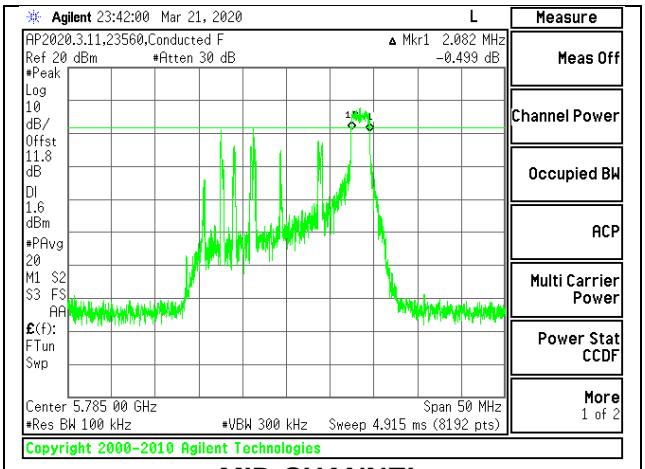

MID CHANNEL

1TX ANT 6 MODE: 242 Tones, RU Index 61

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	18.911	0.5
Mid	5785	18.819	0.5
High	5825	18.911	0.5
144	5720	4.500	0.5

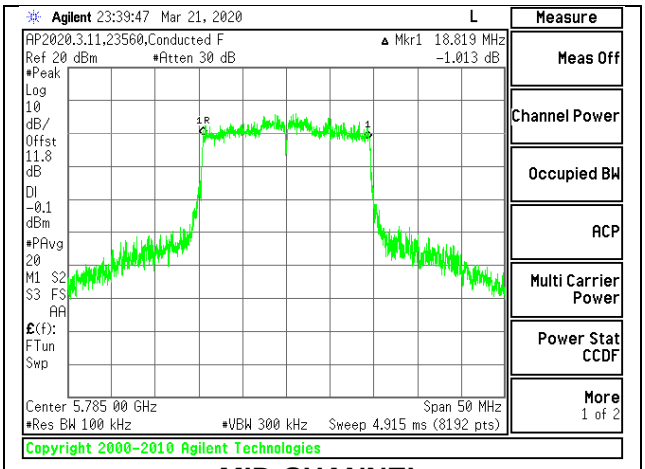

MID CHANNEL

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

1TX ANT 5 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	2.045	0.5
Mid	5785	2.057	0.5
High	5825	1.998	0.5

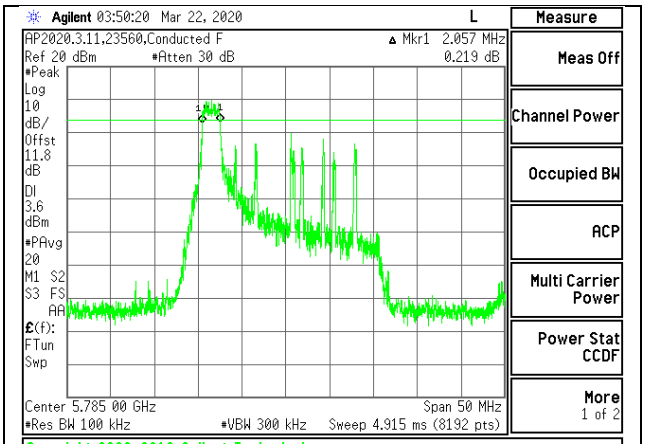

MID CHANNEL

1TX ANT 5 MODE: 26 Tones, RU Index 4

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	2.558	0.5
Mid	5785	2.564	0.5
High	5825	2.625	0.5

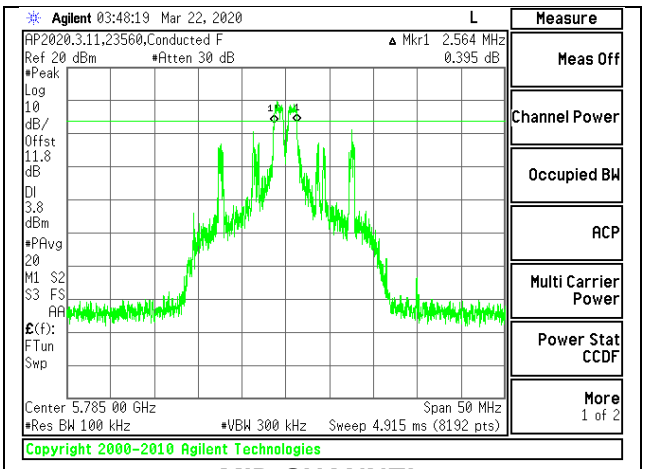

MID CHANNEL

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

1TX ANT 5 MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	2.014	0.5
Mid	5785	2.002	0.5
High	5825	2.060	0.5
144	5720	2.033	0.5

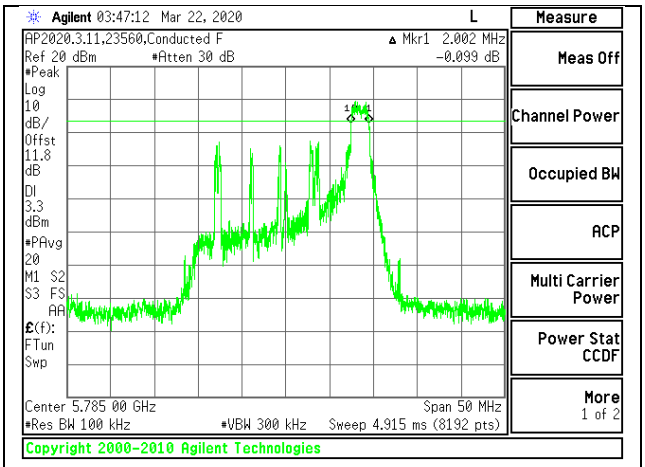

MID CHANNEL

1TX ANT 5 MODE: 242 Tones, RU Index 61

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	18.850	0.5
Mid	5785	18.752	0.5
High	5825	18.930	0.5
144	5720	4.555	0.5

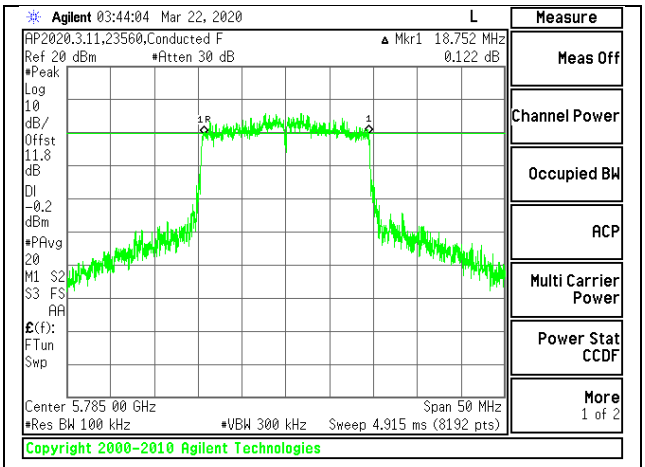

MID CHANNEL

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.