


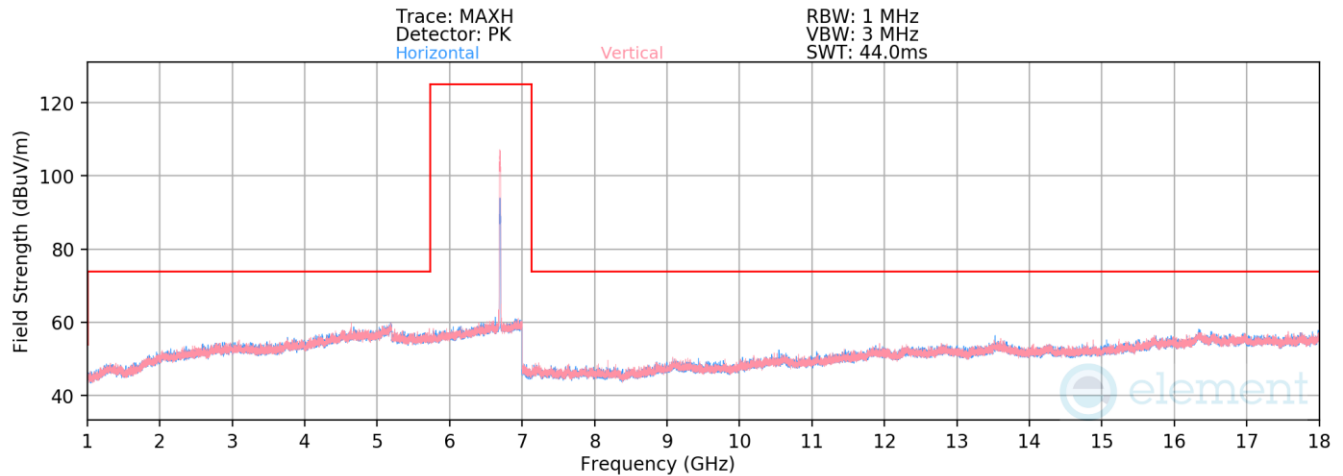

Plot 7-680. Radiated Spurious Emissions above 1GHz Antenna 5b (802.11ax – Ch. 149 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6695MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 13390.00	Peak	H	-	-	-72.33	18.01	52.68	73.98	-21.30
* 13390.00	Average	H	-	-	-83.89	18.01	41.12	53.98	-12.86

Table 7-59. Radiated Spurious Emission Measurements Antenna 5b – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 191 of 324

V 10.5 12/15/2021

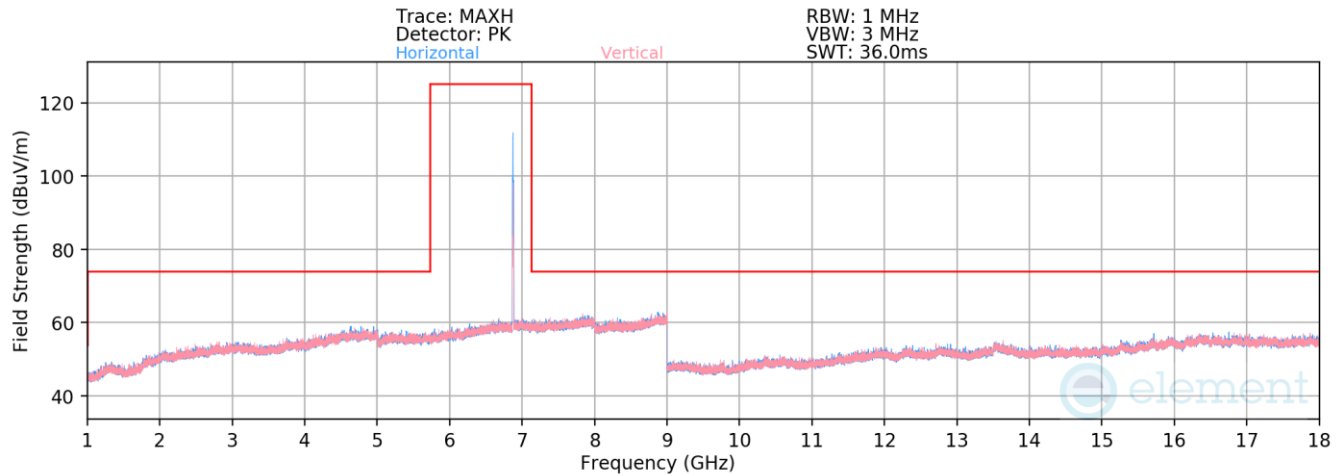

Plot 7-681. Radiated Spurious Emissions above 1GHz Antenna 5b (802.11ax – Ch. 185 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6875MHz
Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13750.00	Average	H	-	-	-82.92	17.84	41.92	68.20	-26.28

Table 7-60. Radiated Spurious Emission Measurements Antenna 5b – RU26

FCC ID: BCGA2764 IC: 579C-A2764	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 192 of 324

V 10.5 12/15/2021

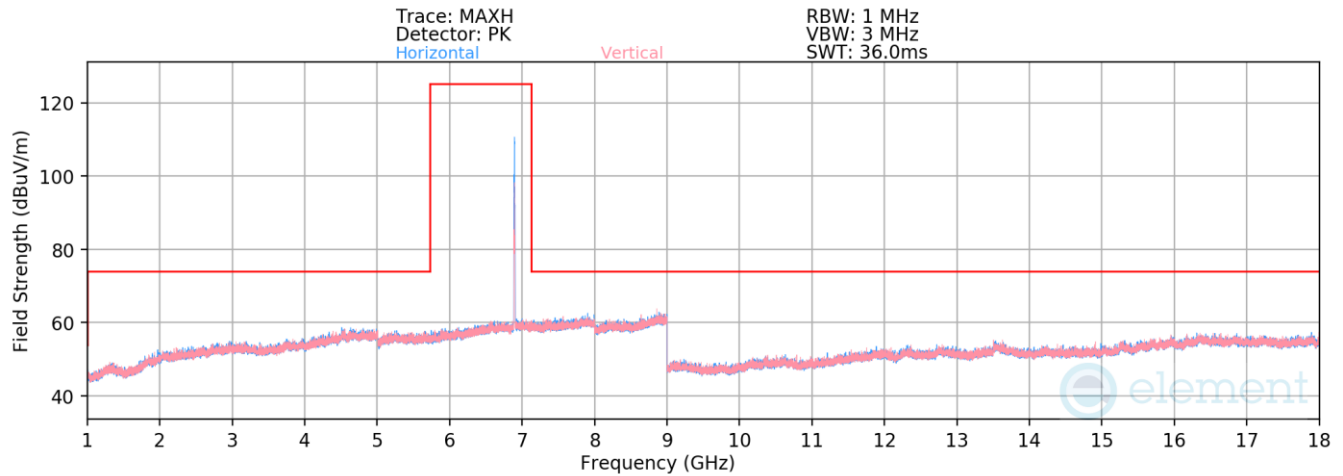

Plot 7-682. Radiated Spurious Emissions above 1GHz Antenna 5b (802.11ax – Ch. 189 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895MHz
Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13750.00	Average	H	-	-	-83.07	17.84	41.77	68.20	-26.43

Table 7-61. Radiated Spurious Emission Measurements Antenna 5b – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 193 of 324

V 10.5 12/15/2021

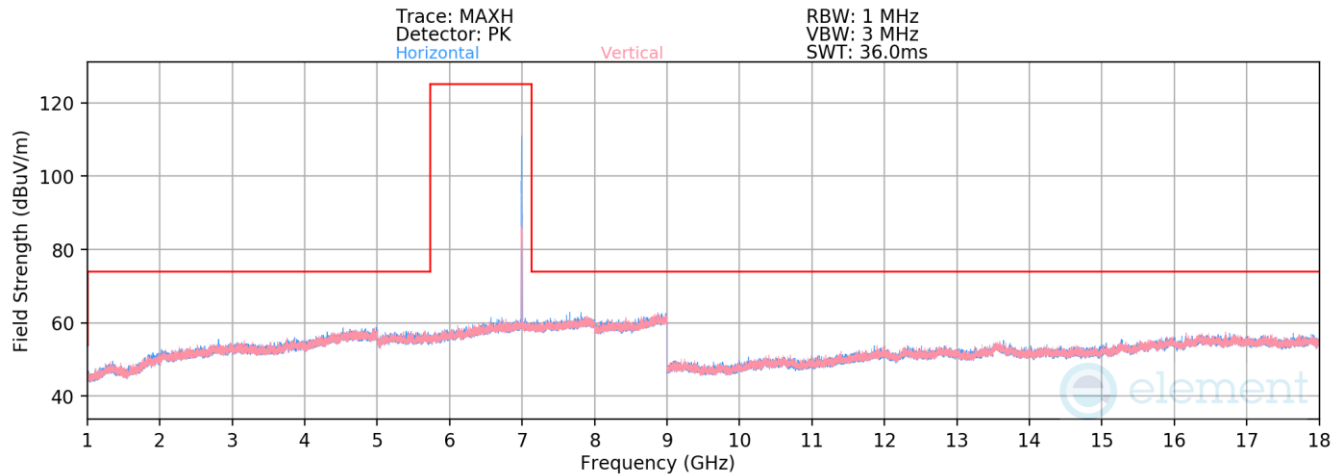

Plot 7-683. Radiated Spurious Emissions above 1GHz Antenna 5b (802.11ax – Ch. 209 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6995MHz
Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Average	H	-	-	-83.49	17.91	41.42	68.20	-26.78

Table 7-62. Radiated Spurious Emission Measurements Antenna 5b – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 194 of 324

V 10.5 12/15/2021

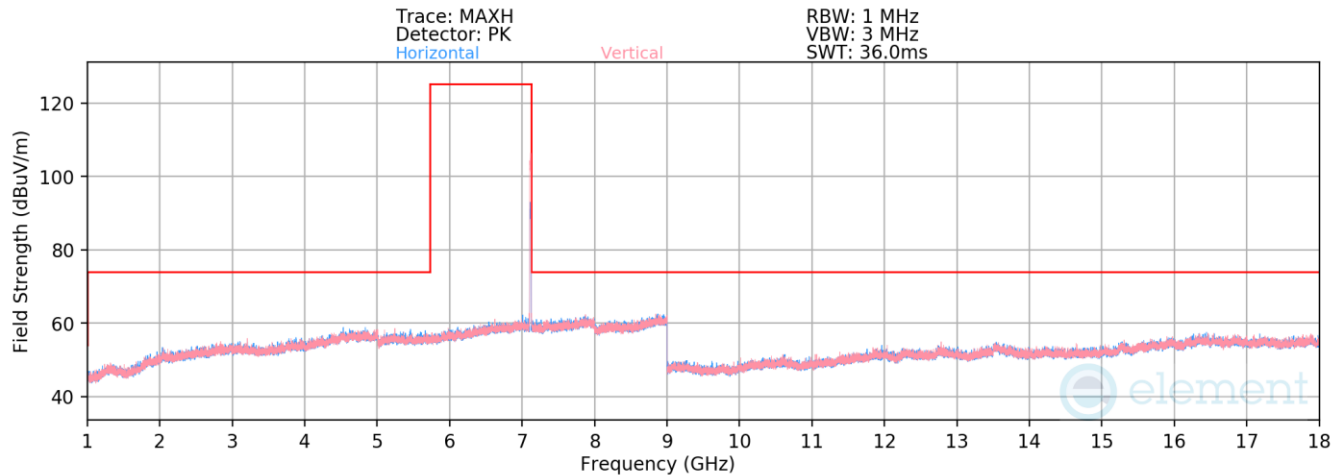

Plot 7-684. Radiated Spurious Emissions above 1GHz Antenna 5b (802.11ax – Ch. 229 – RU26)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
14230.00	Average	H	-	-	-83.41	18.14	41.73	68.20	-26.47

Table 7-63. Radiated Spurious Emission Measurements Antenna 5b – RU26

FCC ID: BCGA2764 IC: 579C-A2764	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 195 of 324

V 10.5 12/15/2021

RU242

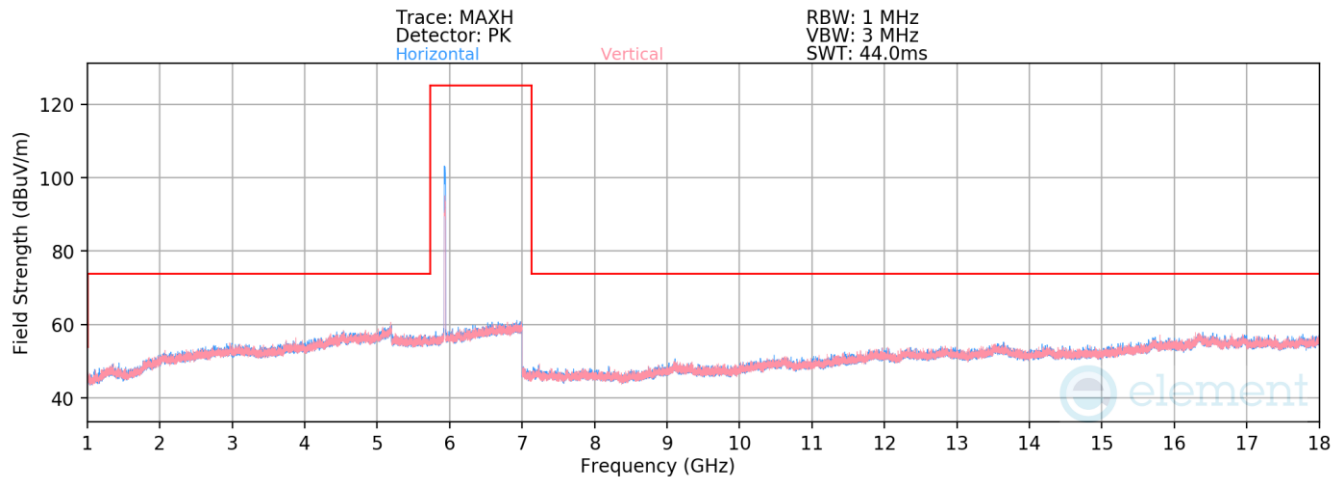

Plot 7-685. Radiated Spurious Emissions above 1GHz Antenna 5b (802.11ax – Ch. 1 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11870.00	Peak	H	-	-	-72.42	16.96	51.54	73.98	-22.44
* 11870.00	Average	H	-	-	-83.43	16.96	40.53	53.98	-13.45
* 17805.00	Peak	H	-	-	-72.82	21.89	56.07	73.98	-17.91
* 17805.00	Average	H	-	-	-84.01	21.89	44.88	53.98	-9.10

Table 7-64. Radiated Spurious Emission Measurements Antenna 5b – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 196 of 324

V 10.5 12/15/2021

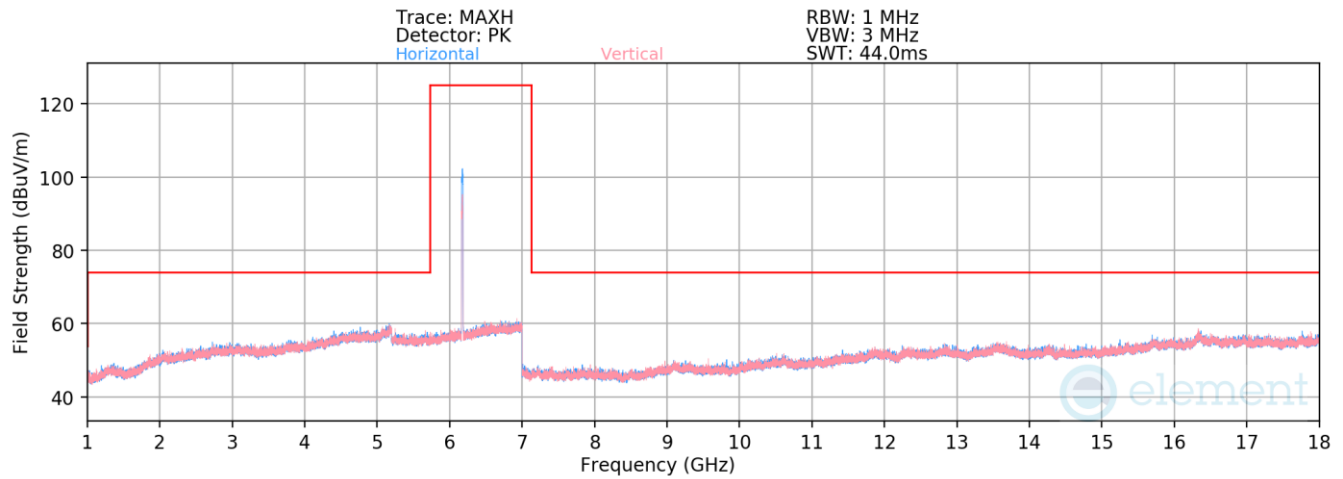

Plot 7-686. Radiated Spurious Emissions above 1GHz Antenna 5b (802.11ax – Ch. 45 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6175MHz
Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12350.00	Peak	H	-	-	-72.40	17.83	52.43	73.98	-21.55
* 12350.00	Average	H	-	-	-84.09	17.83	40.74	53.98	-13.24

Table 7-65. Radiated Spurious Emission Measurements Antenna 5b – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 197 of 324

V 10.5 12/15/2021

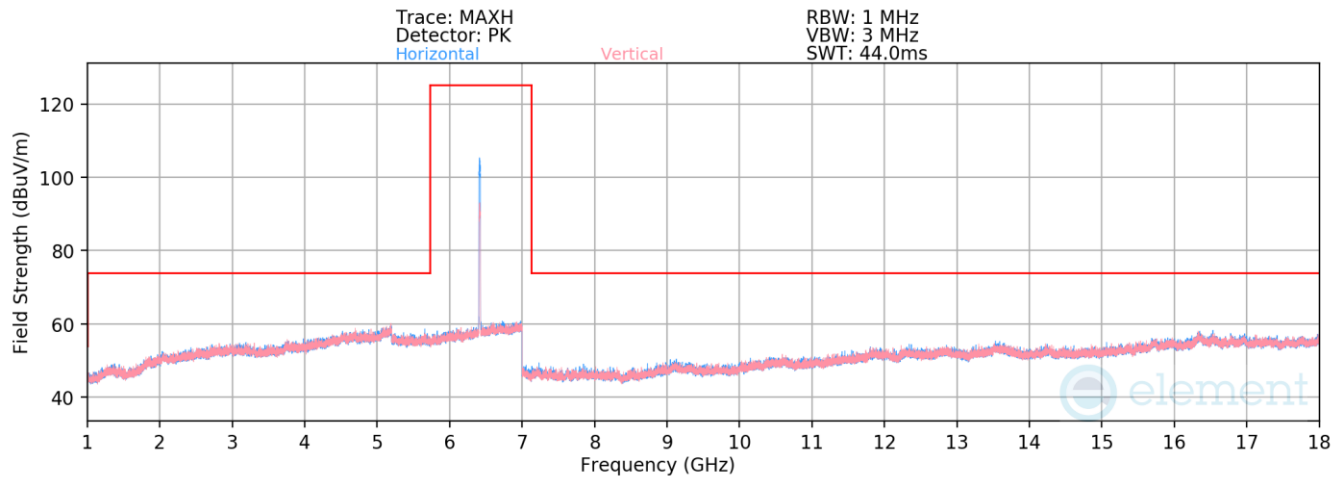

Plot 7-687. Radiated Spurious Emissions above 1GHz Antenna 5b (802.11ax – Ch. 93 – RU242)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415MHz
Channel: 93


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Average	H	-	-	-83.89	18.55	41.66	68.20	-26.54

Table 7-66. Radiated Spurious Emission Measurements Antenna 5b – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 198 of 324

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

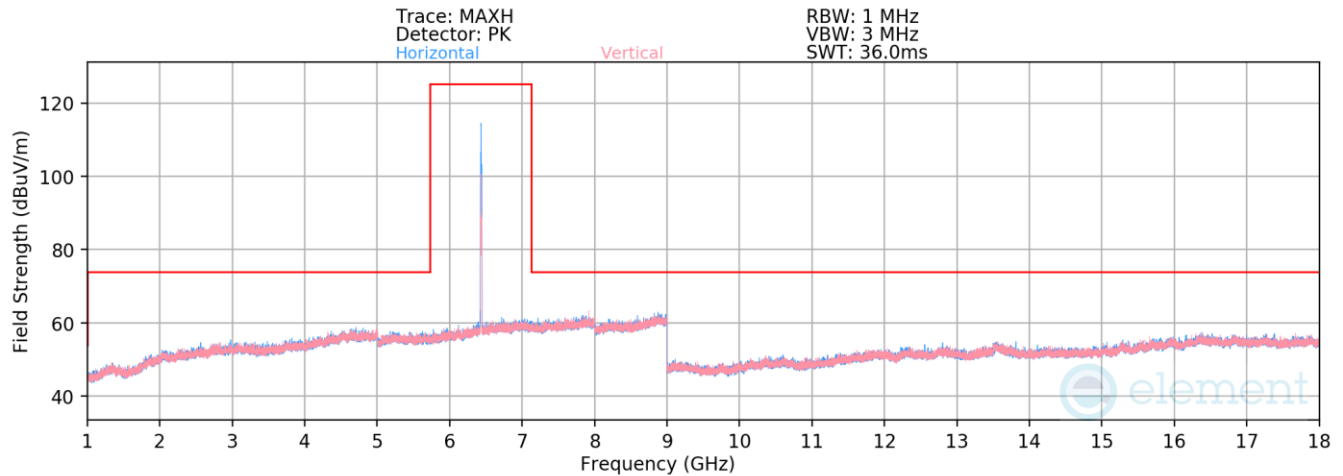

Plot 7-688. Radiated Spurious Emissions above 1GHz Antenna 5b (802.11ax – Ch. 97 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435MHz
Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12870.00	Average	H	-	-	-83.83	18.68	41.85	68.20	-26.35

Table 7-67. Radiated Spurious Emission Measurements Antenna 5b – RU242

FCC ID: BCGA2764 IC: 579C-A2764	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 199 of 324

V 10.5 12/15/2021

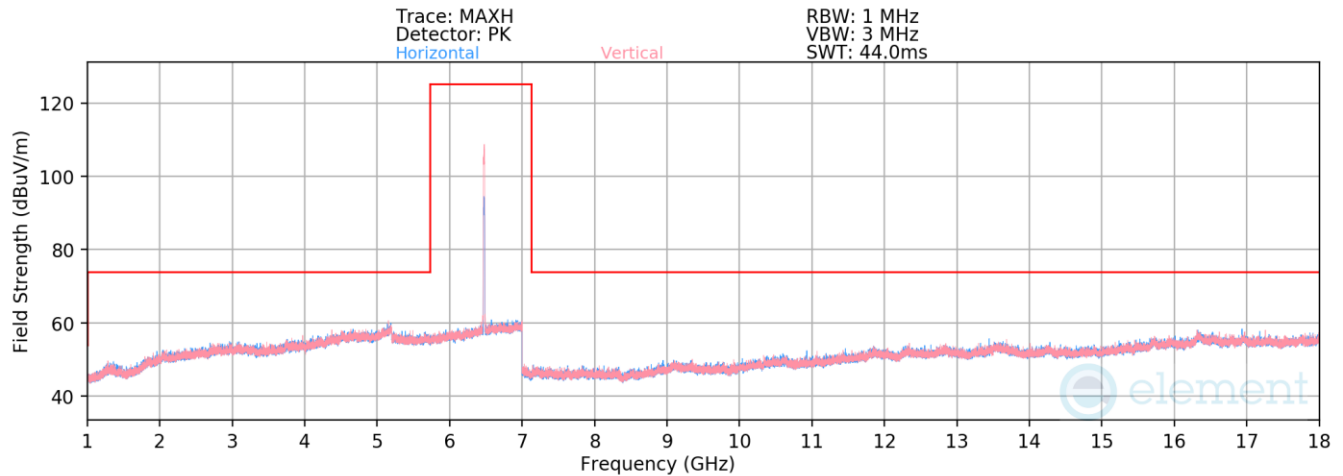

Plot 7-689. Radiated Spurious Emissions above 1GHz Antenna 5b (802.11ax – Ch. 105 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6475MHz
Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12950.00	Average	H	-	-	-83.58	18.16	41.58	68.20	-26.62

Table 7-68. Radiated Spurious Emission Measurements Antenna 5b – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 200 of 324

V 10.5 12/15/2021

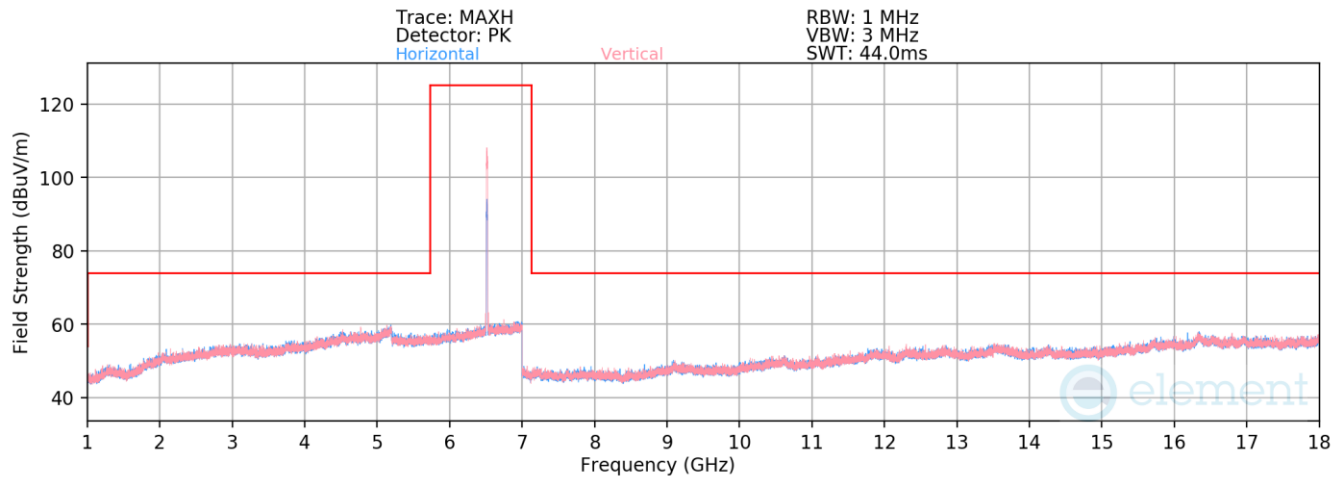

Plot 7-690. Radiated Spurious Emissions above 1GHz Antenna 5b (802.11ax – Ch. 113 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6515MHz
Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13030.00	Average	H	-	-	-83.67	18.52	41.85	68.20	-26.35

Table 7-69. Radiated Spurious Emission Measurements Antenna 5b – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 201 of 324

V 10.5 12/15/2021

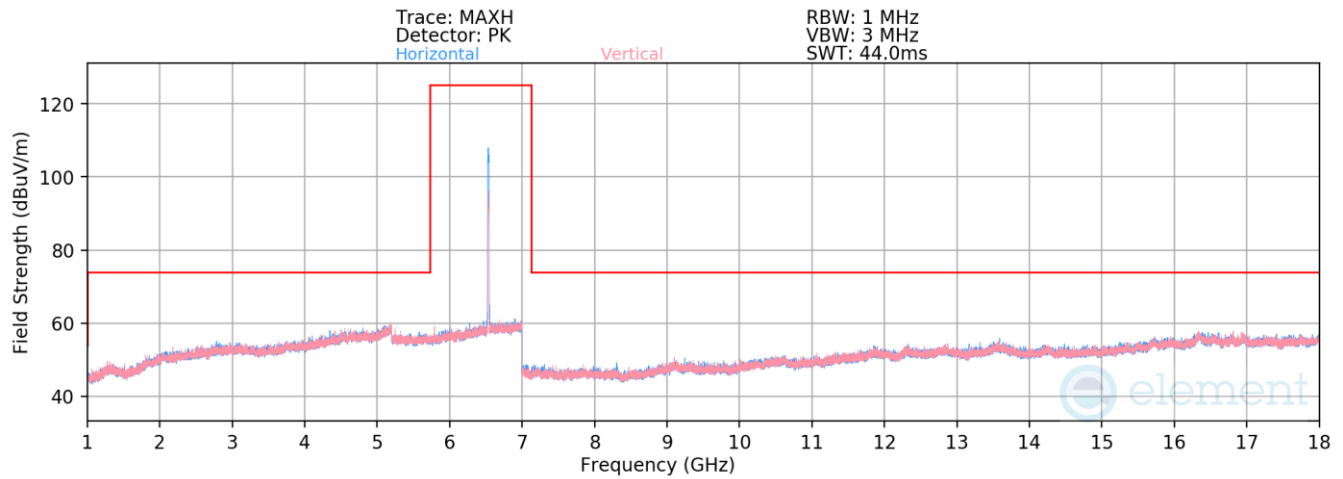

Plot 7-691. Radiated Spurious Emissions above 1GHz Antenna 5b (802.11ax – Ch. 117 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535MHz
Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13070.00	Average	H	-	-	-83.49	18.31	41.82	68.20	-26.38

Table 7-70. Radiated Spurious Emission Measurements Antenna 5b – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 202 of 324

V 10.5 12/15/2021

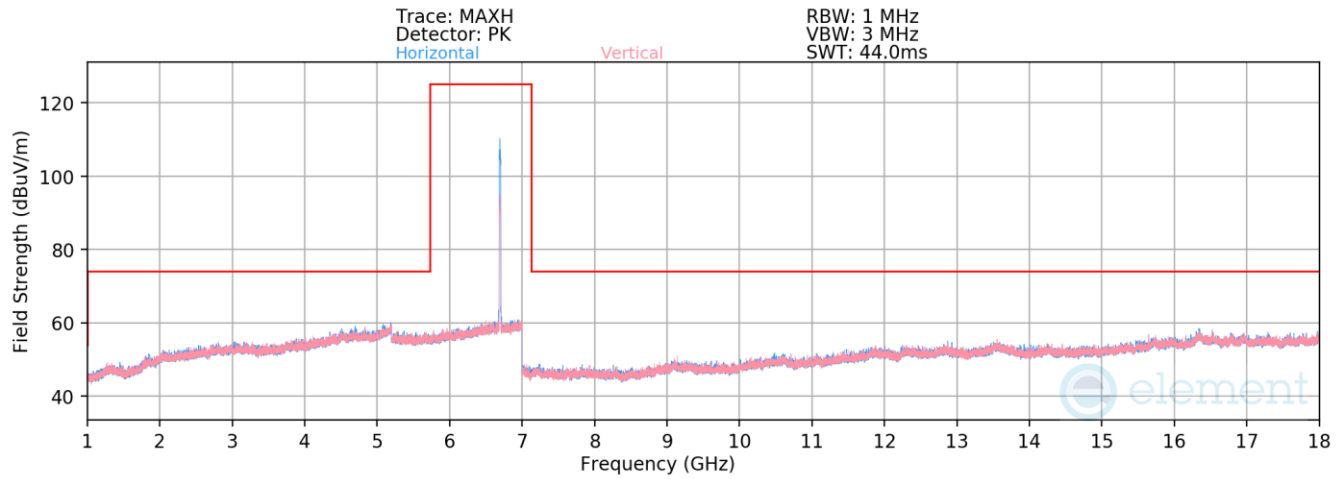

Plot 7-692. Radiated Spurious Emissions above 1GHz Antenna 5b (802.11ax – Ch. 149 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6695MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 13390.00	Peak	H	-	-	-72.72	18.01	52.29	73.98	-21.69
* 13390.00	Average	H	-	-	-83.90	18.01	41.11	53.98	-12.87

Table 7-71. Radiated Spurious Emission Measurements Antenna 5b – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 203 of 324

V 10.5 12/15/2021

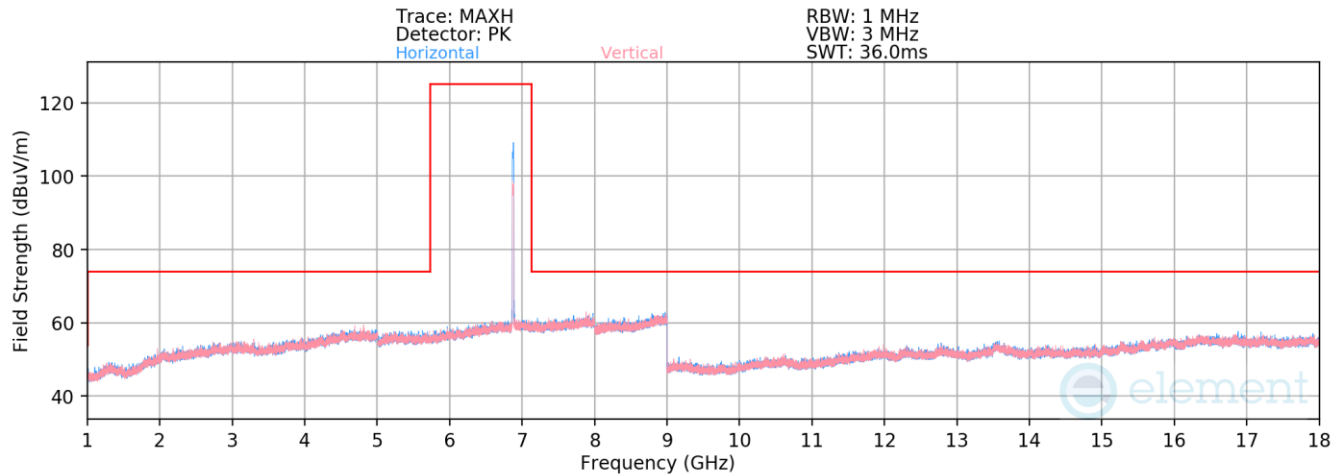

Plot 7-693. Radiated Spurious Emissions above 1GHz Antenna 5b (802.11ax – Ch. 185 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6875MHz
Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13750.00	Average	H	-	-	-82.33	17.84	42.51	68.20	-25.69

Table 7-72. Radiated Spurious Emission Measurements Antenna 5b – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 204 of 324

V 10.5 12/15/2021

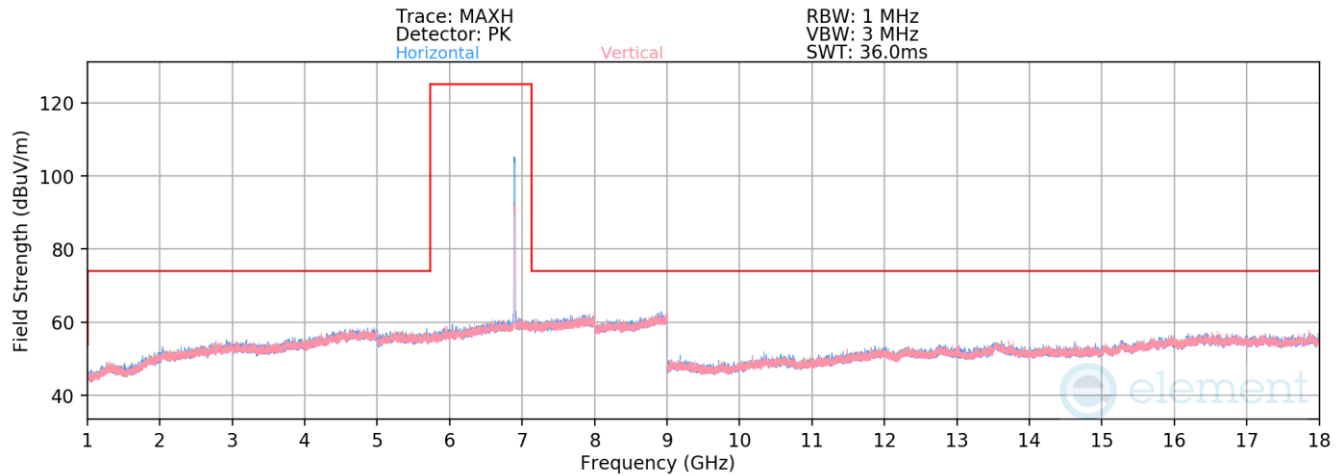

Plot 7-694. Radiated Spurious Emissions above 1GHz Antenna 5b (802.11ax – Ch. 189 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895MHz
Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13750.00	Average	H	-	-	-83.13	17.84	41.71	68.20	-26.49

Table 7-73. Radiated Spurious Emission Measurements Antenna 5b – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 205 of 324

V 10.5 12/15/2021

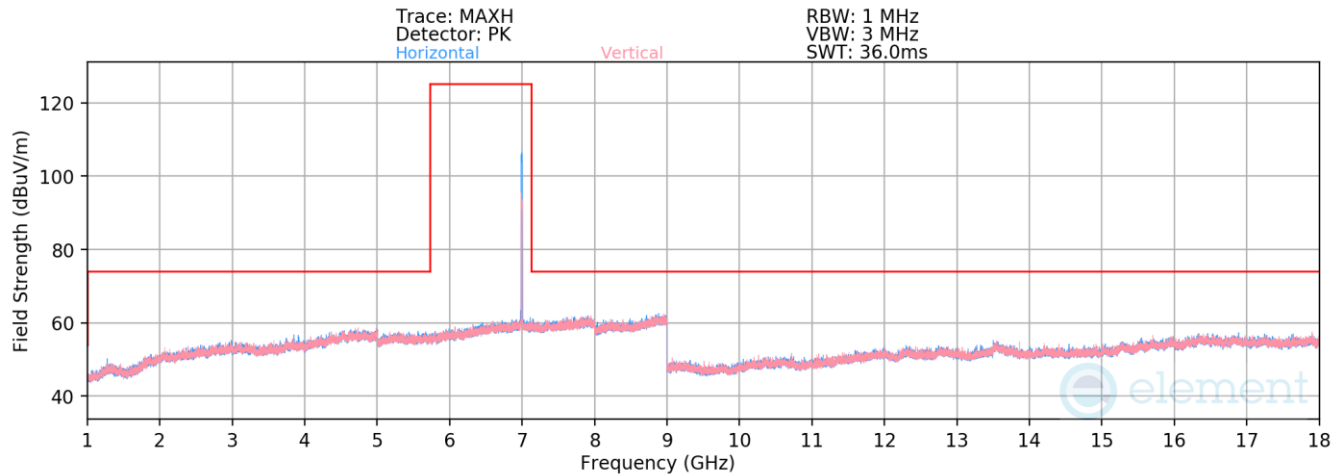

Plot 7-695. Radiated Spurious Emissions above 1GHz Antenna 5b (802.11ax – Ch. 209 – RU242)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6995MHz
Channel: 209


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Average	H	-	-	-82.89	17.91	42.02	68.20	-26.18

Table 7-74. Radiated Spurious Emission Measurements Antenna 5b – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 206 of 324

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

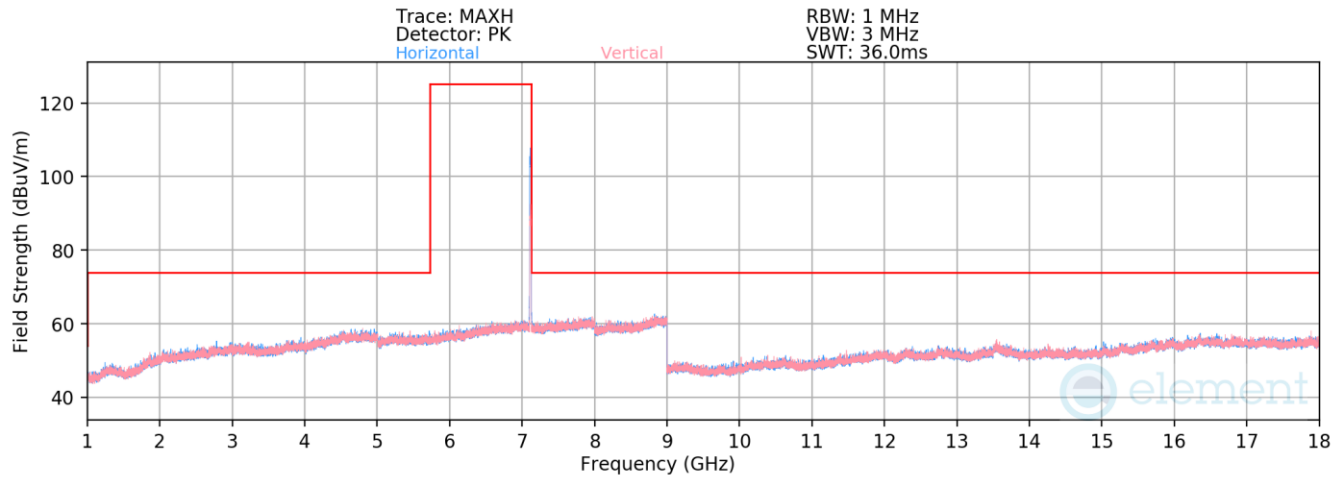

Plot 7-696. Radiated Spurious Emissions above 1GHz Antenna 5b (802.11ax – Ch. 229 – RU242)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
14230.00	Average	H	-	-	-83.65	18.14	41.49	68.20	-26.71


Table 7-75. Radiated Spurious Emission Measurements Antenna 5b – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 207 of 324

V 10.5 12/15/2021

7.7.2 Antenna 4a Primary Radiated Spurious Emission

RU26

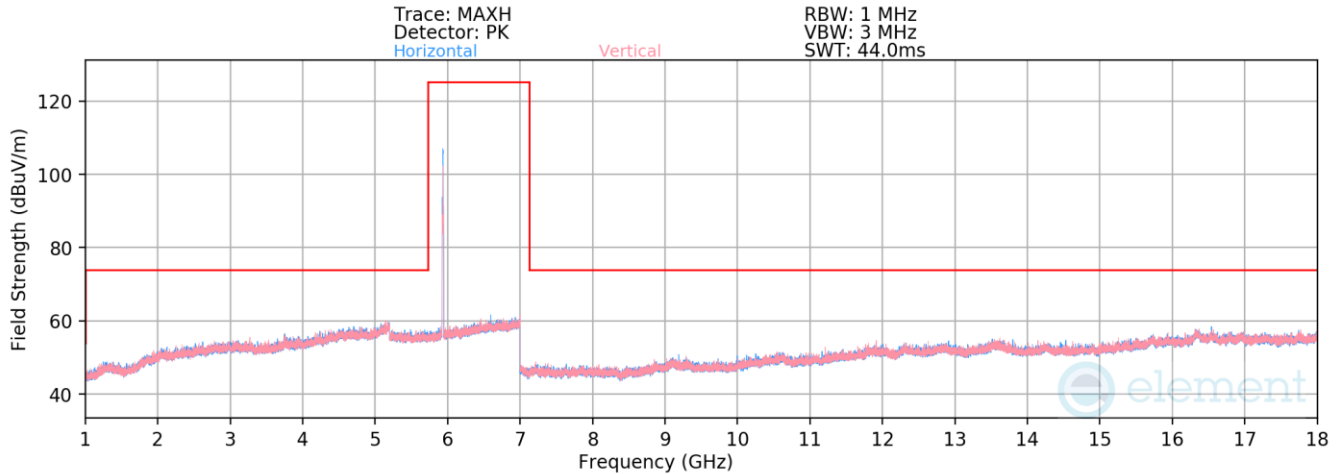

Plot 7-697. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 1 – RU26)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11870.00	Peak	H	-	-	-72.23	16.96	51.73	73.98	-22.25
* 11870.00	Average	H	-	-	-83.43	16.96	40.53	53.98	-13.45
* 17805.00	Peak	H	-	-	-73.55	21.89	55.34	73.98	-18.64
* 17805.00	Average	H	-	-	-84.06	21.89	44.83	53.98	-9.15

Table 7-76. Radiated Spurious Emission Measurements Antenna 4a – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 208 of 324

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

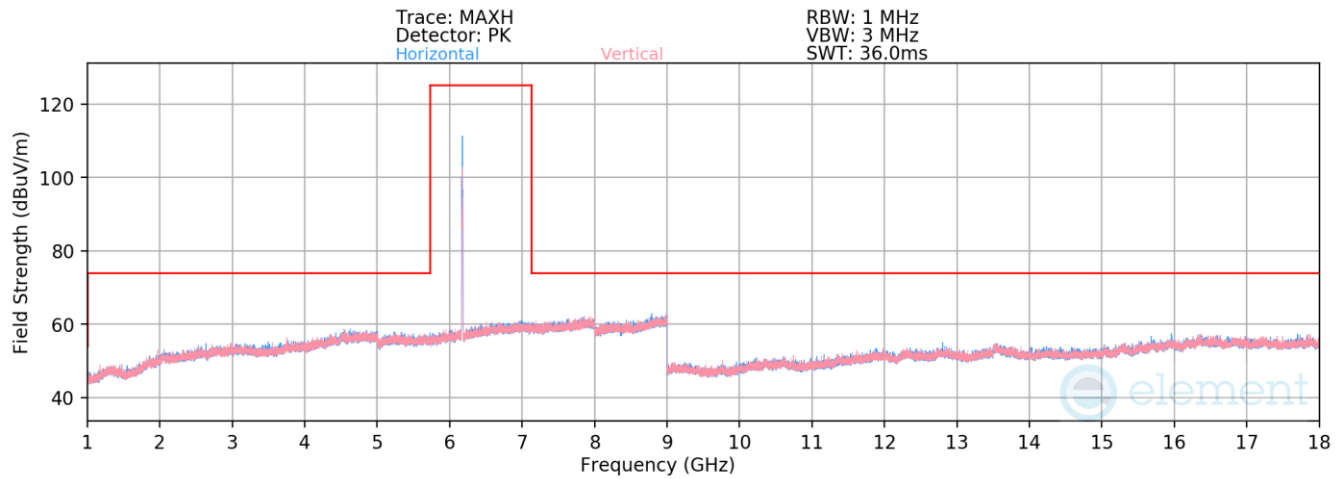

Plot 7-698. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 45 – RU26)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6175MHz
Channel: 45


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12350.00	Peak	H	-	-	-73.13	17.83	51.70	73.98	-22.28
* 12350.00	Average	H	-	-	-84.09	17.83	40.74	53.98	-13.24

Table 7-77. Radiated Spurious Emission Measurements Antenna 4a – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 209 of 324

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

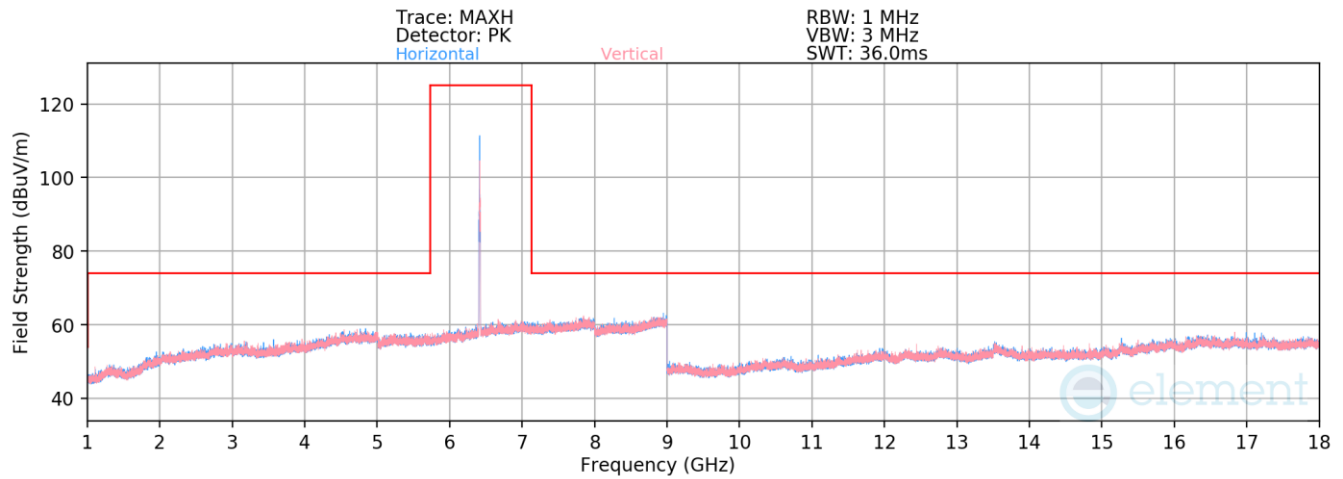

Plot 7-699. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 93 – RU26)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415MHz
Channel: 93


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12830.00	Average	H	-	-	-84.98	17.95	39.97	68.20	-28.23

Table 7-78. Radiated Spurious Emission Measurements Antenna 4a – RU26

FCC ID: BCGA2764 IC: 579C-A2764	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 210 of 324

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

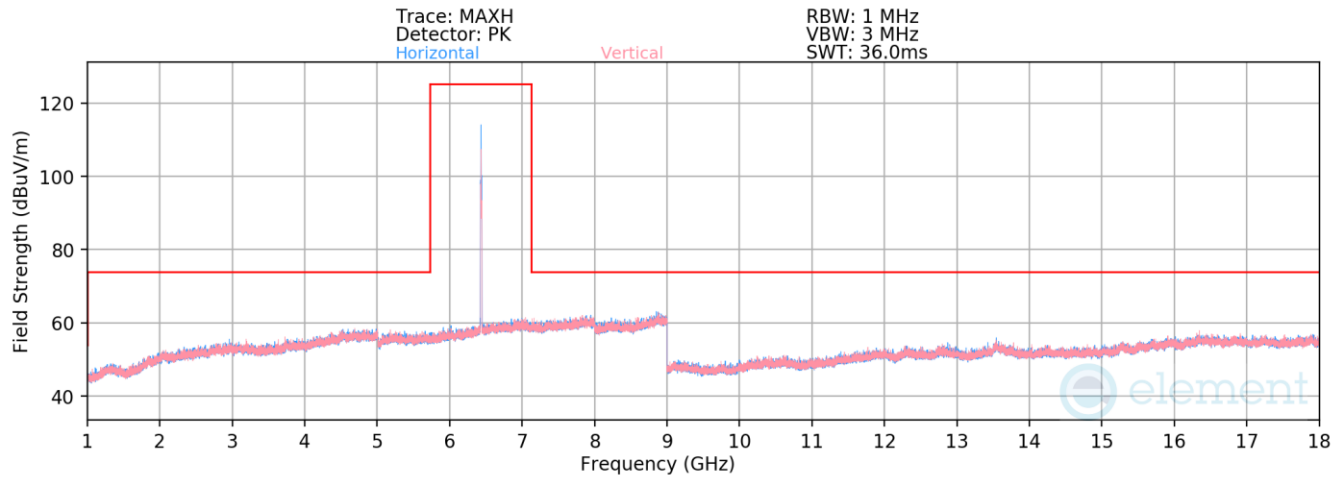

Plot 7-700. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 97 – RU26)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435MHz
Channel: 97


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12870.00	Average	H	-	-	-85.11	18.82	40.71	68.20	-27.49

Table 7-79. Radiated Spurious Emission Measurements Antenna 4a – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 211 of 324

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

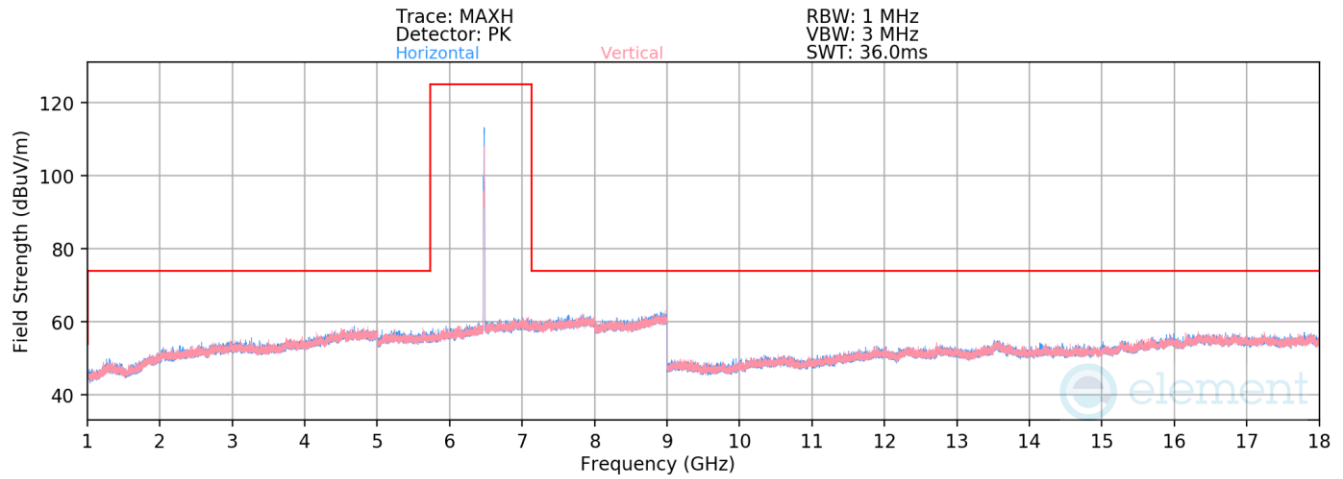

Plot 7-701. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 105 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6475MHz
Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12950.00	Average	H	102	169	-81.62	18.24	43.62	68.20	-24.58

Table 7-80. Radiated Spurious Emission Measurements Antenna 4a – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 212 of 324

V 10.5 12/15/2021

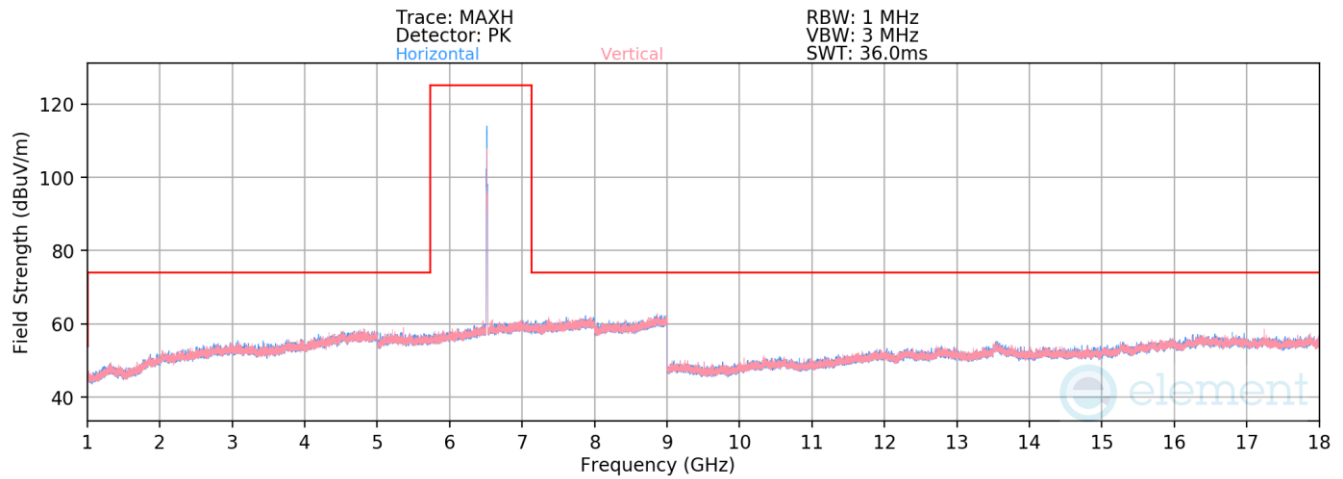

Plot 7-702. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 113 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6515MHz
Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13030.00	Average	H	-	-	-79.15	18.13	45.98	68.20	-22.22

Table 7-81. Radiated Spurious Emission Measurements Antenna 4a – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 213 of 324

V 10.5 12/15/2021

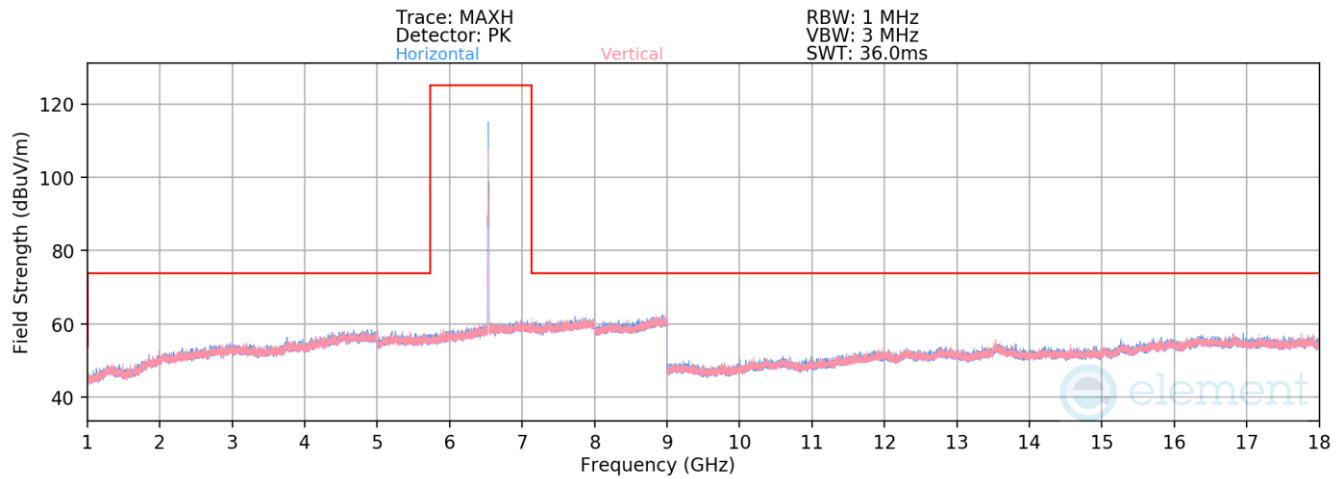

Plot 7-703. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 117 – RU26)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535MHz
Channel: 117


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13070.00	Average	H	105	161	-77.88	18.51	47.63	68.20	-20.57

Table 7-82. Radiated Spurious Emission Measurements Antenna 4a – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 214 of 324

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

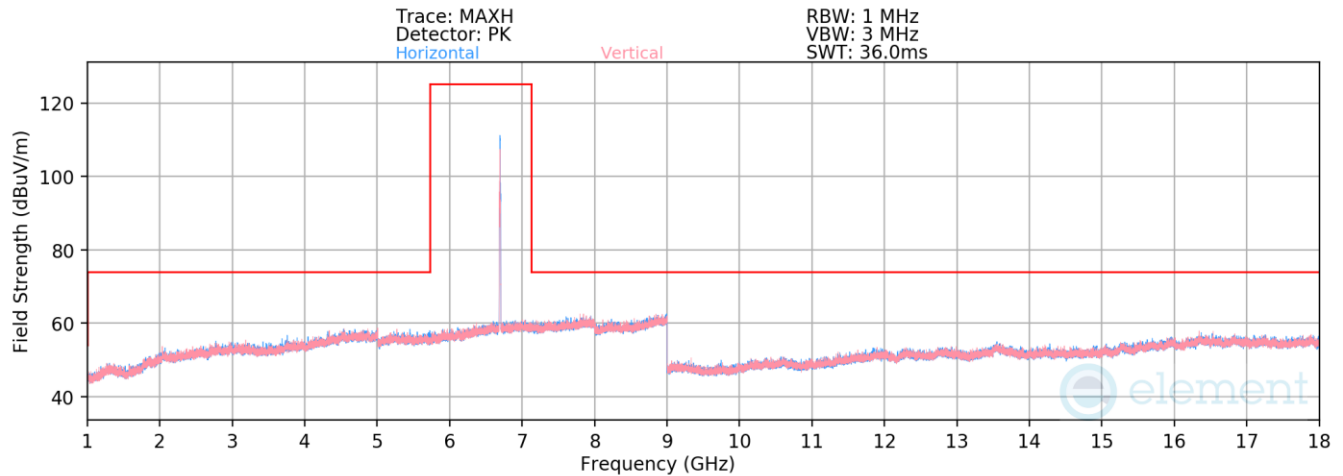

Plot 7-704. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 149 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6695MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 13390.00	Peak	H	-	-	-72.66	18.12	52.46	73.98	-21.52
* 13390.00	Average	H	-	-	-83.88	18.12	41.24	53.98	-12.74

Table 7-83. Radiated Spurious Emission Measurements Antenna 4a – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 215 of 324

V 10.5 12/15/2021

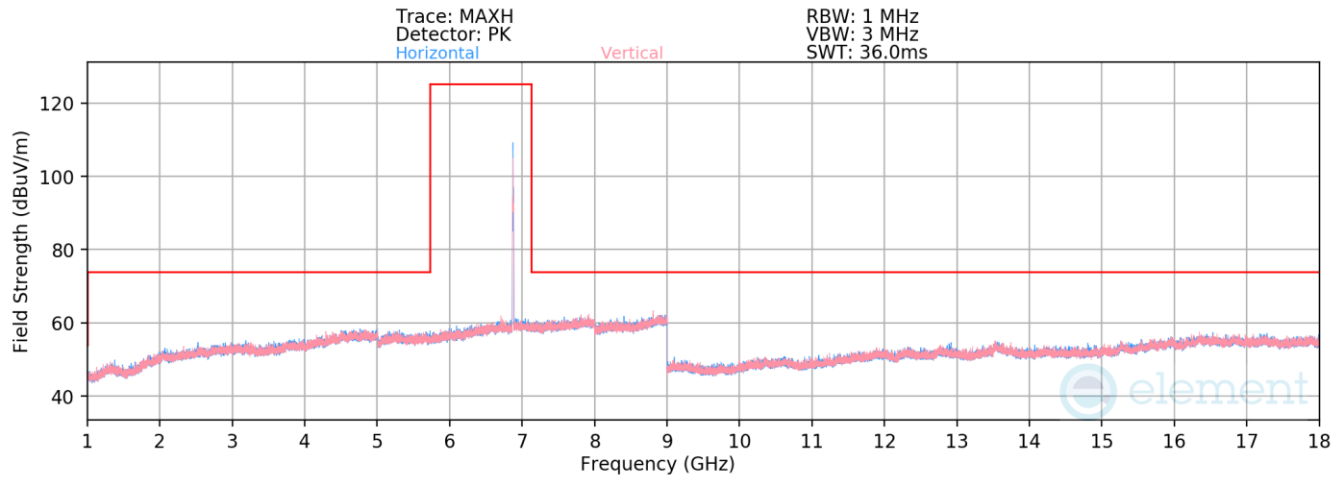

Plot 7-705. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 185 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6875MHz
Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13750.00	Average	H	101	161	-75.46	17.84	49.38	68.20	-18.82

Table 7-84. Radiated Spurious Emission Measurements Antenna 4a – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 216 of 324

V 10.5 12/15/2021

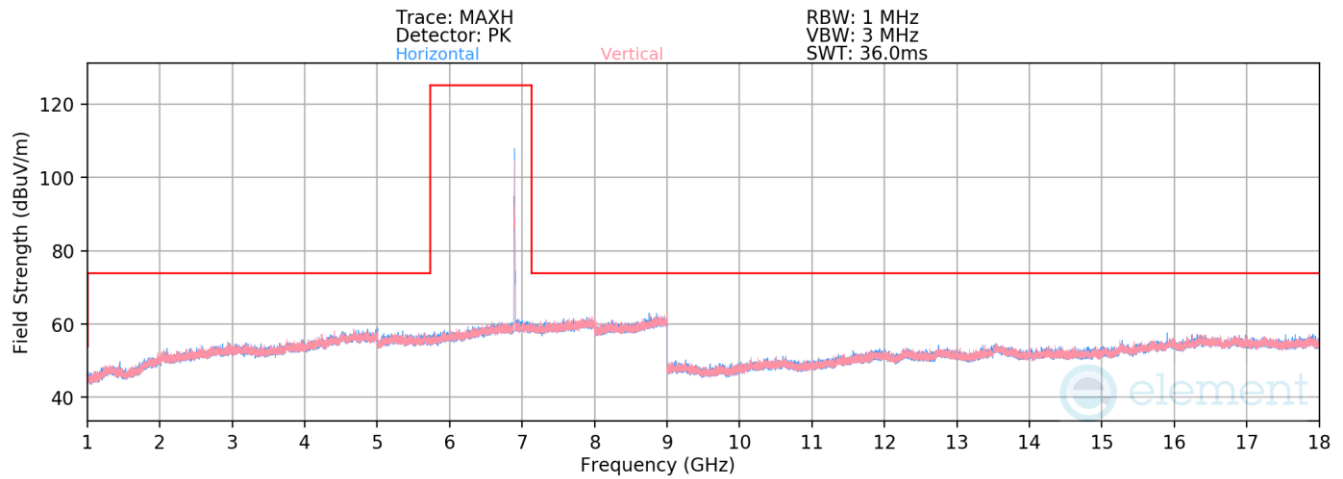

Plot 7-706. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 189 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895MHz
Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13790.00	Average	H	101	157	-76.27	17.74	48.47	68.20	-19.73

Table 7-85. Radiated Spurious Emission Measurements Antenna 4a – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 217 of 324

V 10.5 12/15/2021

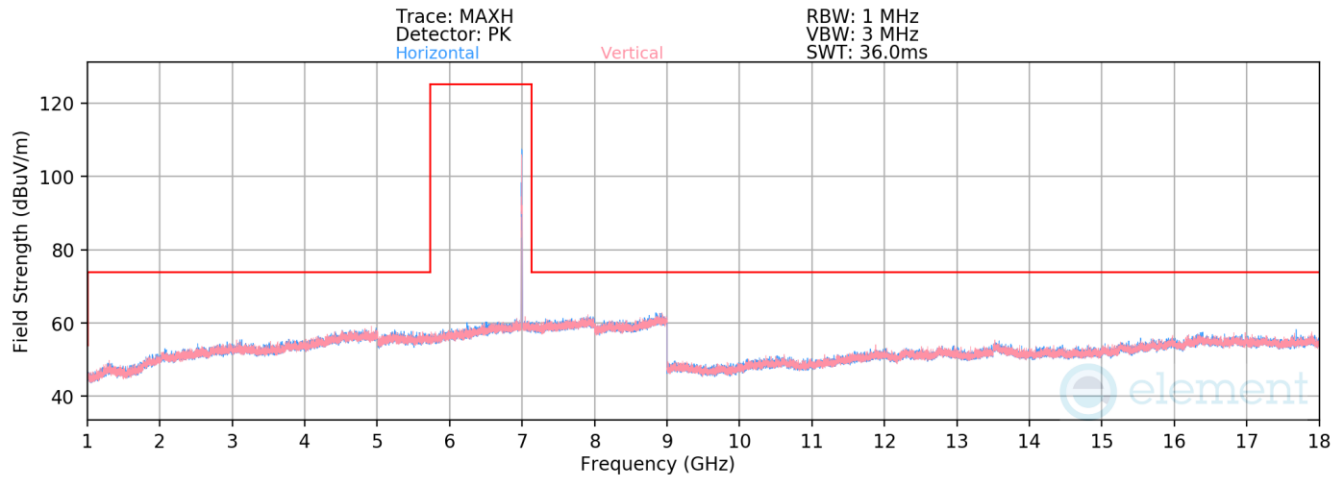

Plot 7-707. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 209 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6995MHz
Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Average	H	101	164	-77.43	17.91	47.48	68.20	-20.72

Table 7-86. Radiated Spurious Emission Measurements Antenna 4a – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 218 of 324

V 10.5 12/15/2021

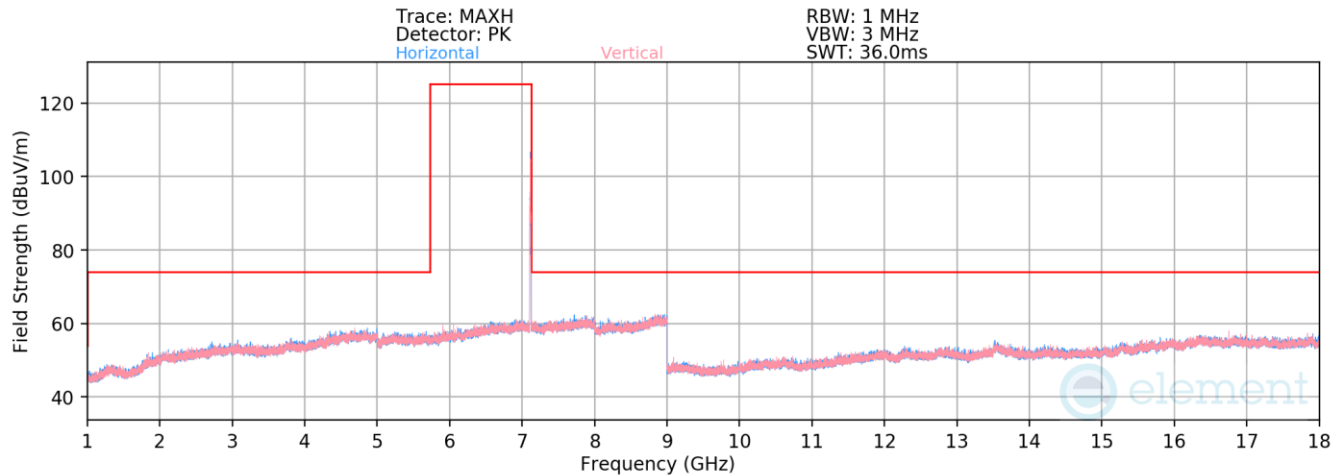

Plot 7-708. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 229 – RU26)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
14230.00	Average	H	-	-	-83.83	18.14	41.31	68.20	-26.89

Table 7-87. Radiated Spurious Emission Measurements Antenna 4a – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 219 of 324

V 10.5 12/15/2021

RU242

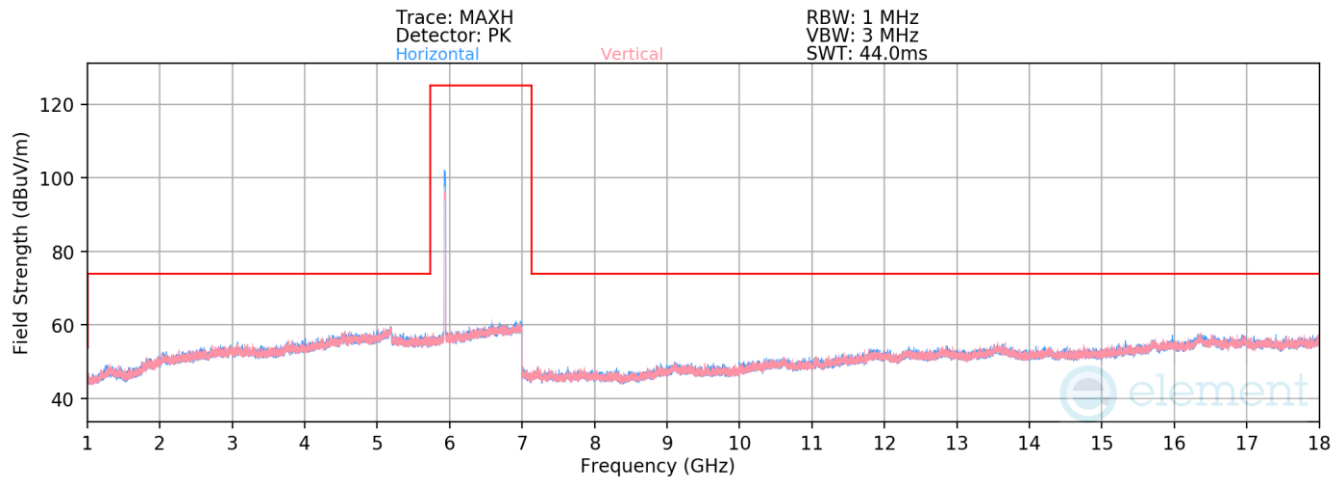

Plot 7-709. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 1 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11870.00	Peak	H	-	-	-72.61	16.96	51.35	73.98	-22.63
* 11870.00	Average	H	-	-	-83.47	16.96	40.49	53.98	-13.49
* 17805.00	Peak	H	-	-	-72.86	21.89	56.03	73.98	-17.95
* 17805.00	Average	H	-	-	-84.29	21.89	44.60	53.98	-9.38

Table 7-88. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 220 of 324

V 10.5 12/15/2021

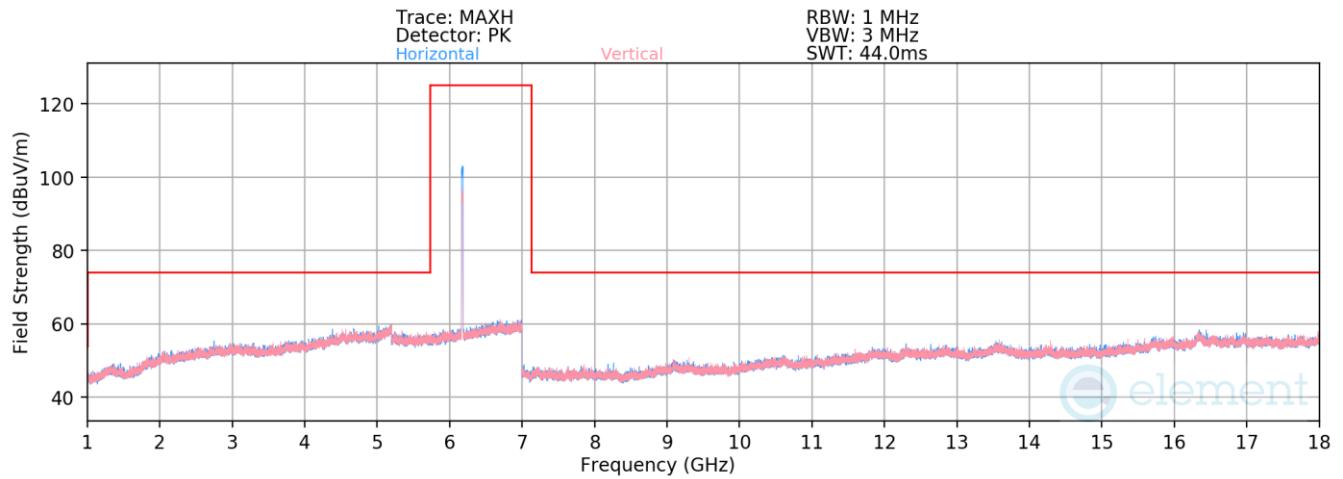

Plot 7-710. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 45 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6175MHz
Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12350.00	Peak	H	-	-	-72.70	17.83	52.13	73.98	-21.85
* 12350.00	Average	H	-	-	-84.26	17.83	40.57	53.98	-13.41

Table 7-89. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 221 of 324

V 10.5 12/15/2021

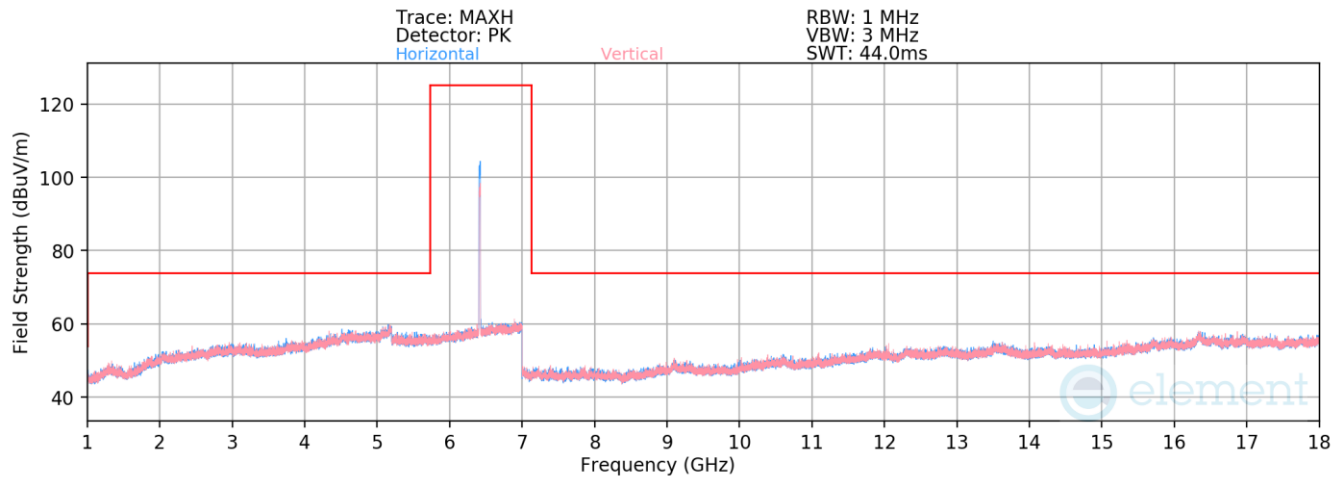

Plot 7-711. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 93 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12830.00	Average	H	-	-	-84.29	18.55	41.26	68.20	-26.94

Table 7-90. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 222 of 324

V 10.5 12/15/2021

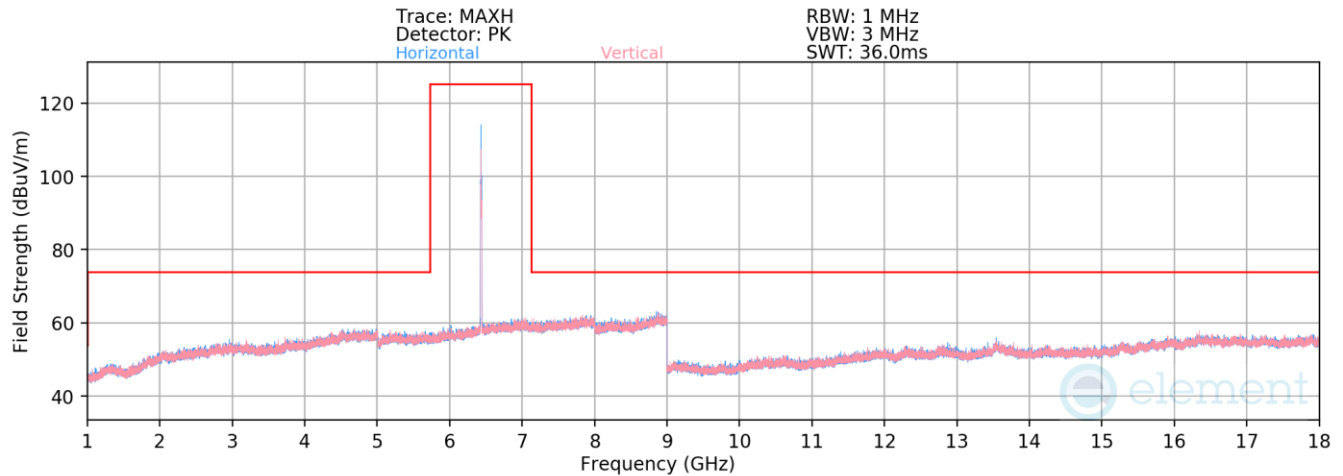

Plot 7-712. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 97 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435MHz
Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12870.00	Average	H	-	-	-84.23	18.68	41.45	68.20	-26.75

Table 7-91. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 223 of 324

V 10.5 12/15/2021

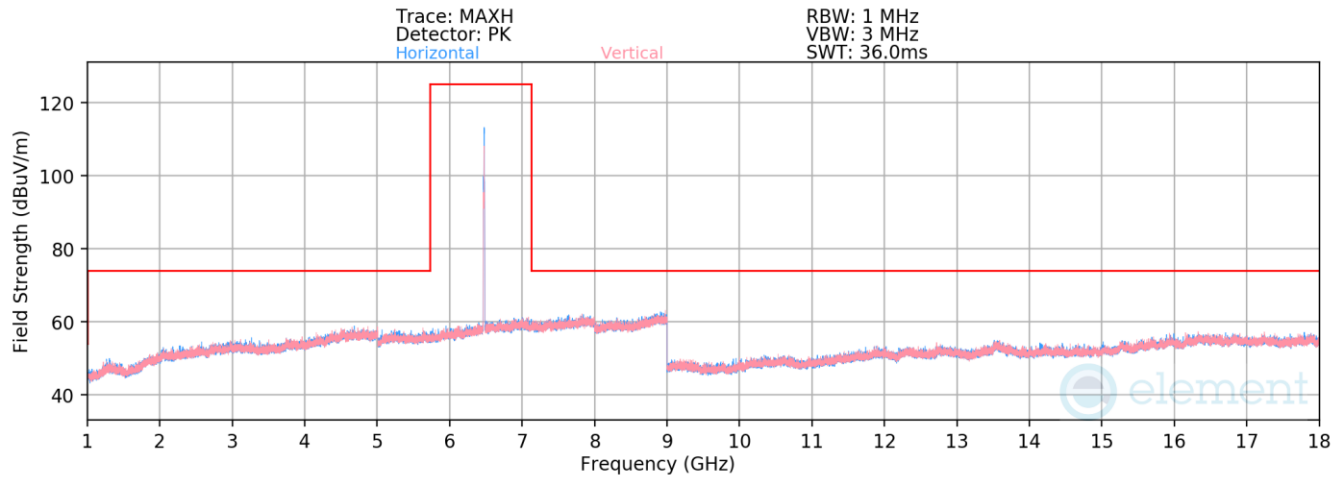

Plot 7-713. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 105 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6475MHz
Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12950.00	Average	H	-	-	-83.48	18.16	41.68	68.20	-26.52

Table 7-92. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 224 of 324

V 10.5 12/15/2021

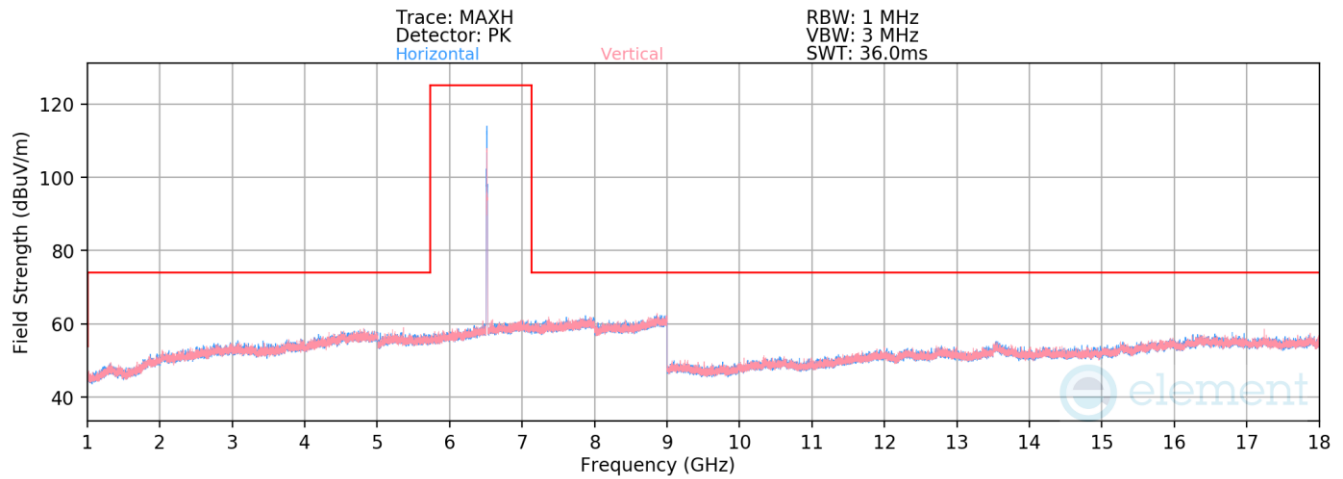

Plot 7-714. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 113 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6515MHz
Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13030.00	Average	H	-	-	-83.72	18.52	41.80	68.20	-26.40

Table 7-93. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2764 IC: 579C-A2764	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 225 of 324

V 10.5 12/15/2021

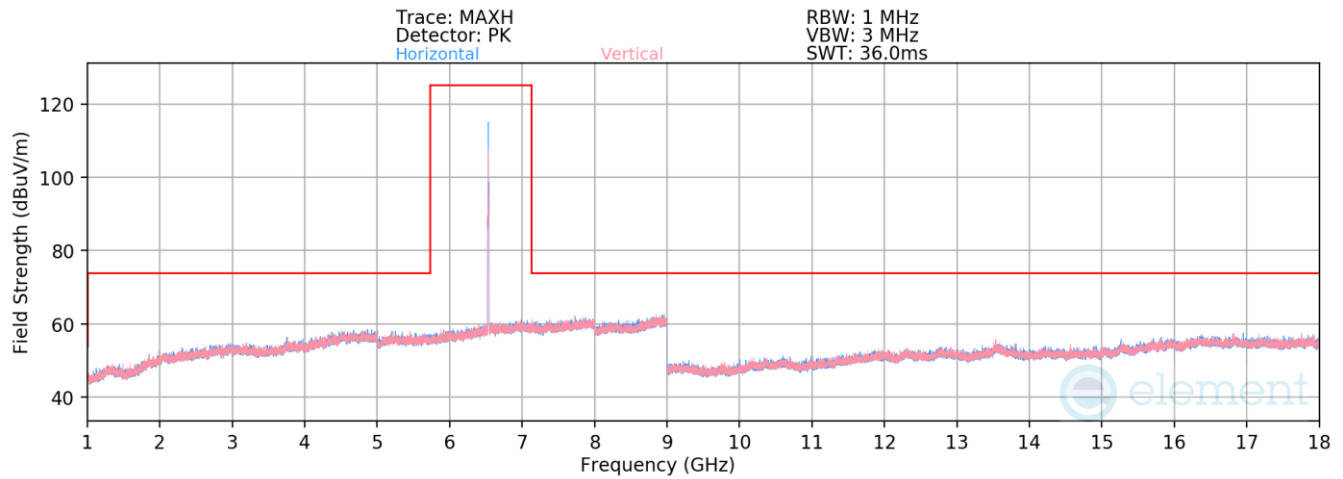

Plot 7-715. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 117 – RU242)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535MHz
Channel: 117


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13070.00	Average	H	-	-	-83.65	18.31	41.66	68.20	-26.54

Table 7-94. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 226 of 324

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

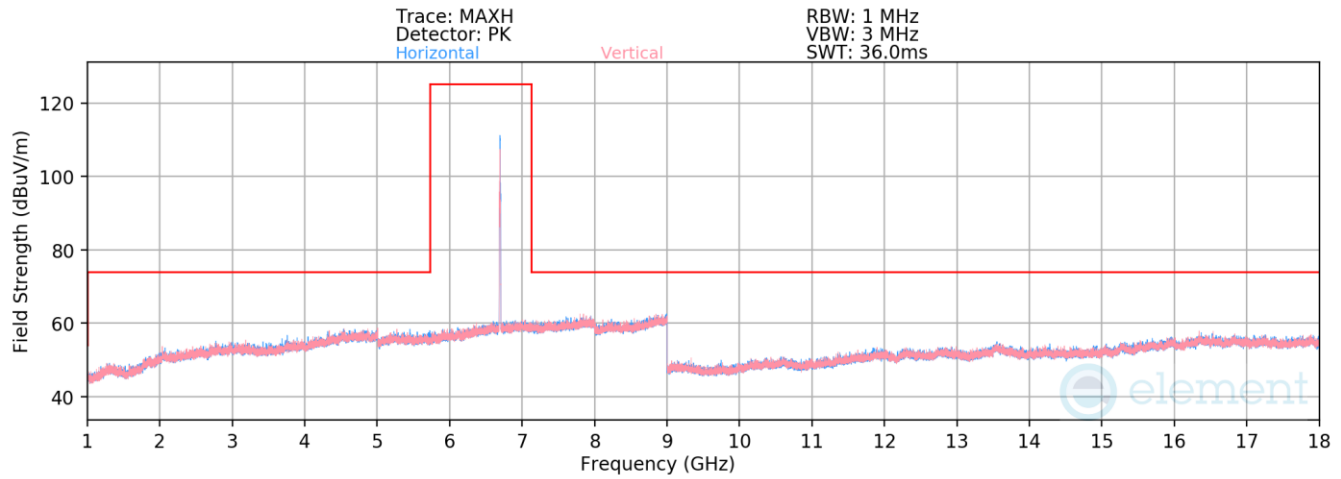

Plot 7-716. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 149 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6695MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 13390.00	Peak	H	-	-	-72.54	18.01	52.47	73.98	-21.51
* 13390.00	Average	H	-	-	-84.02	18.01	40.99	53.98	-12.99

Table 7-95. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 227 of 324

V 10.5 12/15/2021

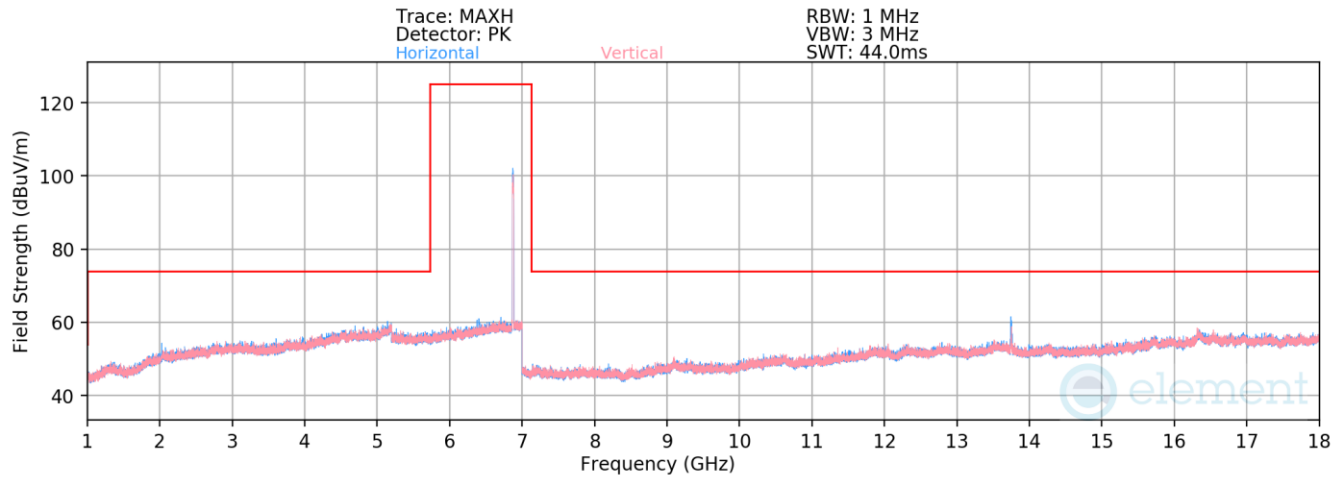

Plot 7-717. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 185 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6875MHz
Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13750.00	Average	H	-	-	-83.19	17.84	41.65	68.20	-26.55

Table 7-96. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 228 of 324

V 10.5 12/15/2021

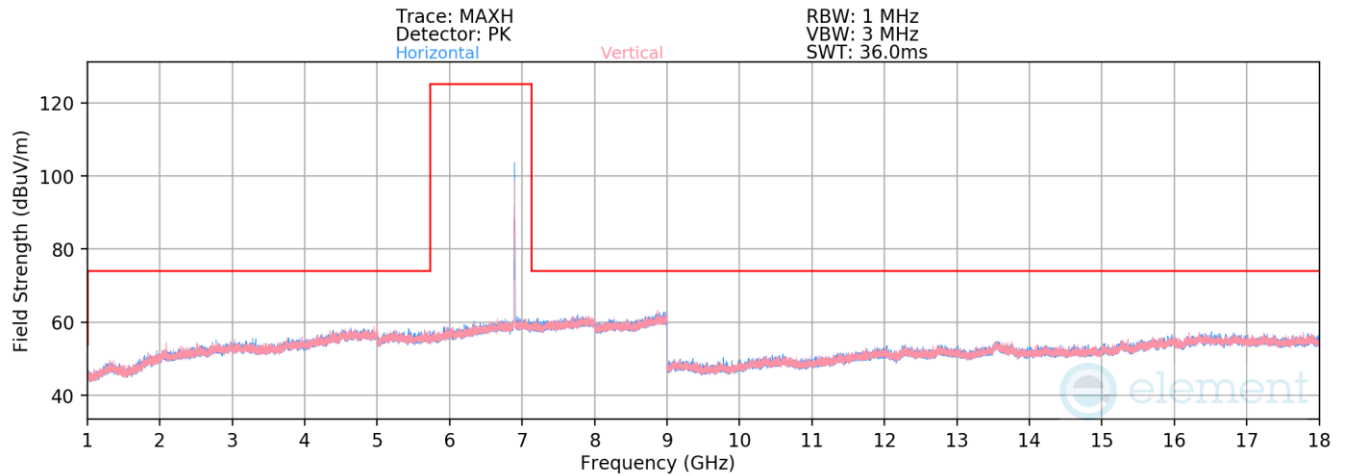

Plot 7-718. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 189 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895MHz
Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13750.00	Average	H	-	-	-83.00	17.84	41.84	68.20	-26.36

Table 7-97. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 229 of 324

V 10.5 12/15/2021

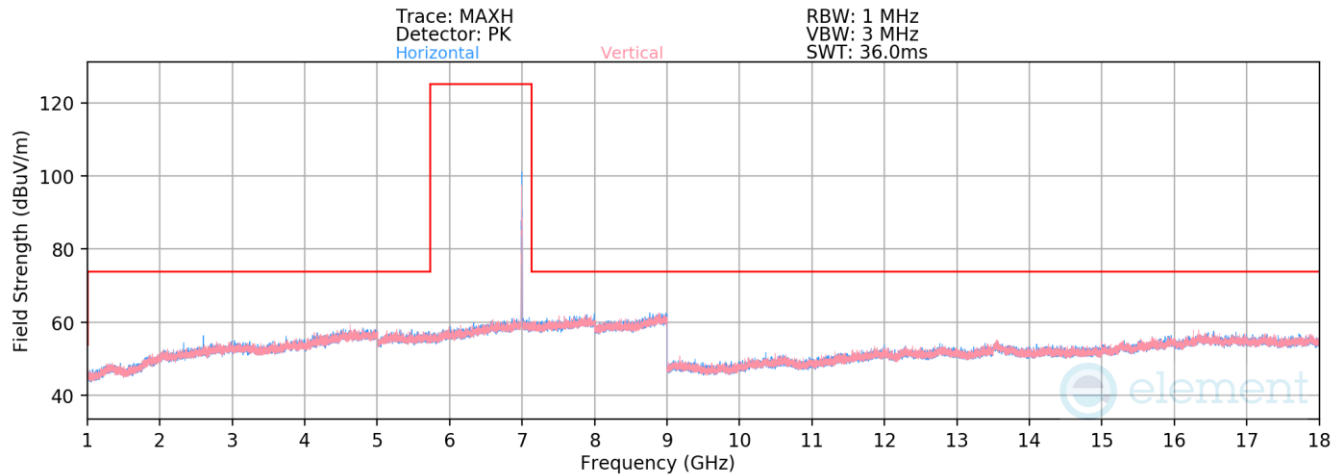

Plot 7-719. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 209 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6995MHz
Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Average	H	-	-	-83.57	17.91	41.34	68.20	-26.86

Table 7-98. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 230 of 324

V 10.5 12/15/2021

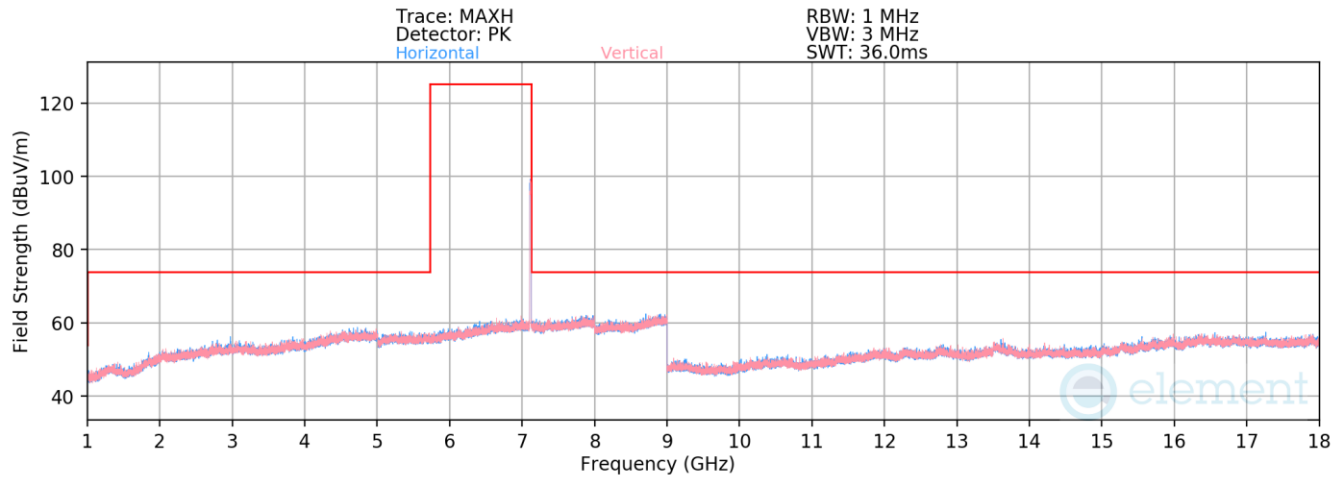

Plot 7-720. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 229 – RU242)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
14230.00	Average	H	-	-	-83.46	18.14	41.68	68.20	-26.52


Table 7-99. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 231 of 324


V 10.5 12/15/2021

7.7.3 SDM Primary Radiated Spurious Emission

RU26

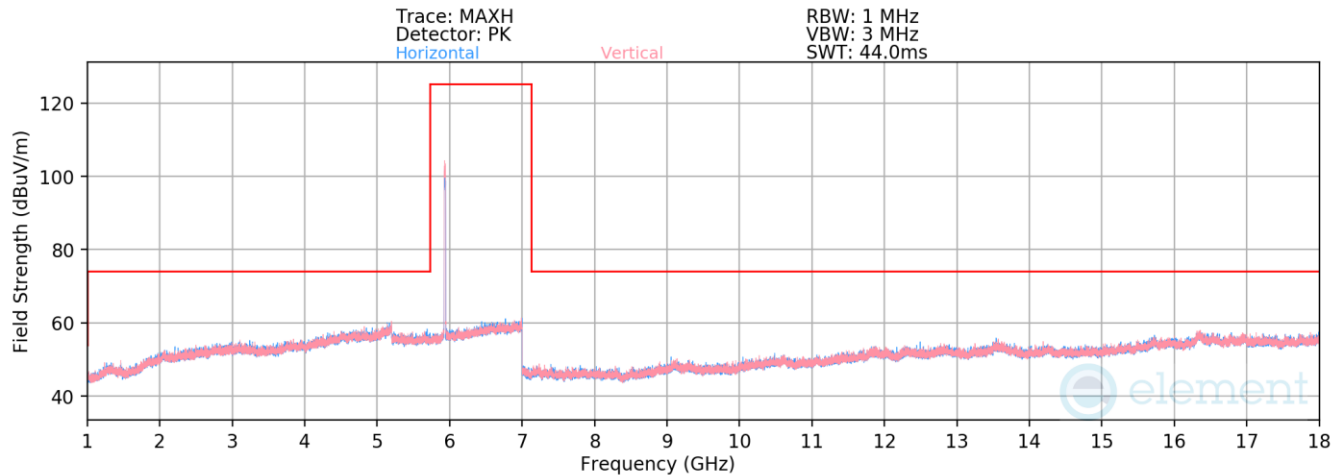

Plot 7-721. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 1 – RU26)

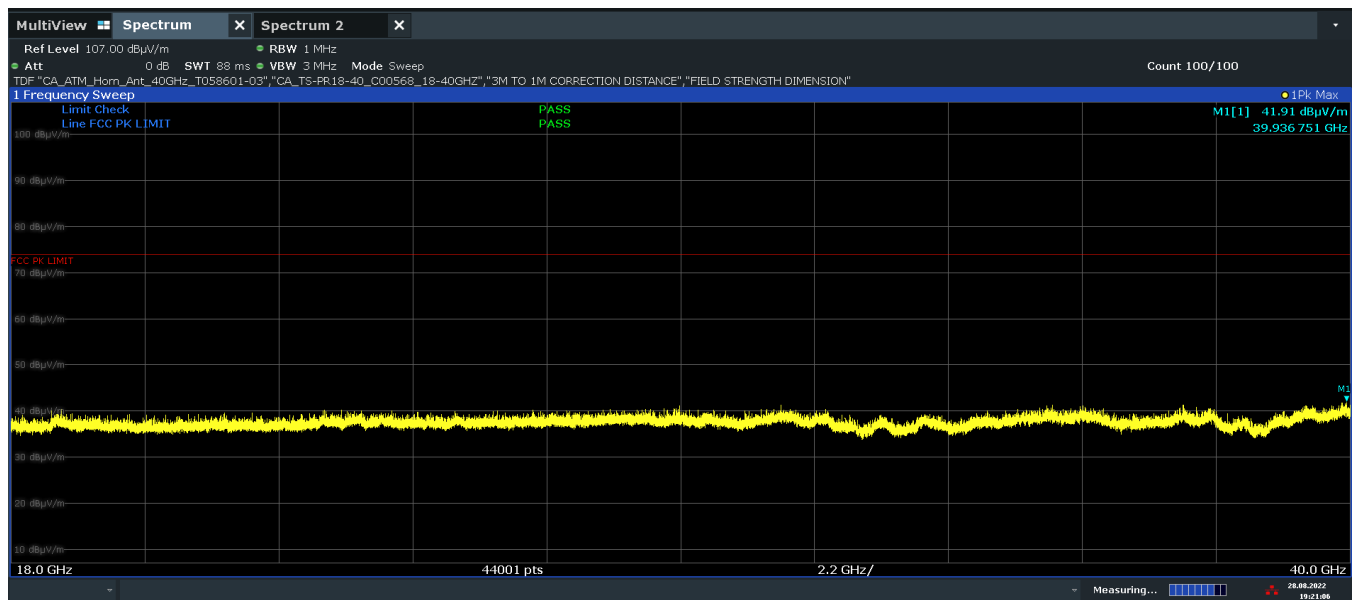


19:21:06 20.08.2022

Plot 7-722. Radiated Spurious Emissions 18-40GHz SDM (802.11ax – Ch. 1 – RU26, Pol. H)

FCC ID: BCGA2764 IC: 579C-A2764	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 232 of 324

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

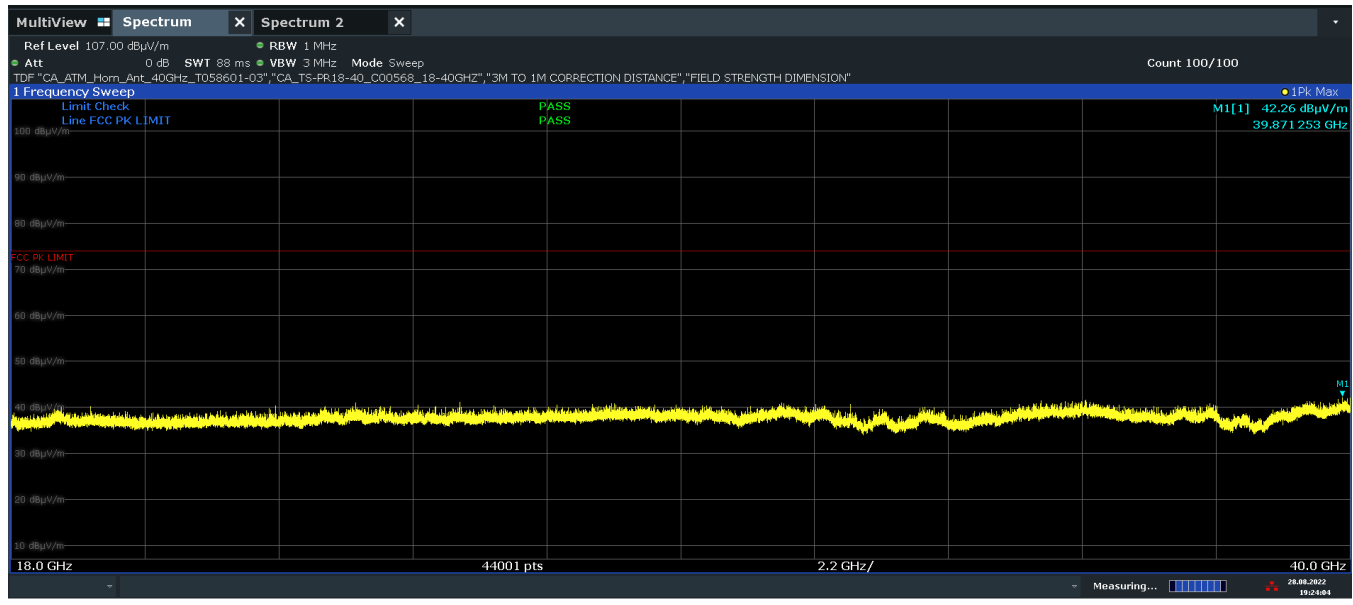

Plot 7-723. Radiated Spurious Emissions 18-40GHz SDM (802.11ax – Ch. 1 – RU26, Pol. V)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5955MHz
 Channel: 1


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11870.00	Peak	H	-	-	-72.36	16.96	51.60	73.98	-22.38
* 11870.00	Average	H	-	-	-83.48	16.96	40.48	53.98	-13.50
* 17805.00	Peak	H	-	-	-72.57	21.89	56.32	73.98	-17.66
* 17805.00	Average	H	-	-	-84.07	21.89	44.82	53.98	-9.16

Table 7-100. Radiated Spurious Emission Measurements SDM – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 233 of 324

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

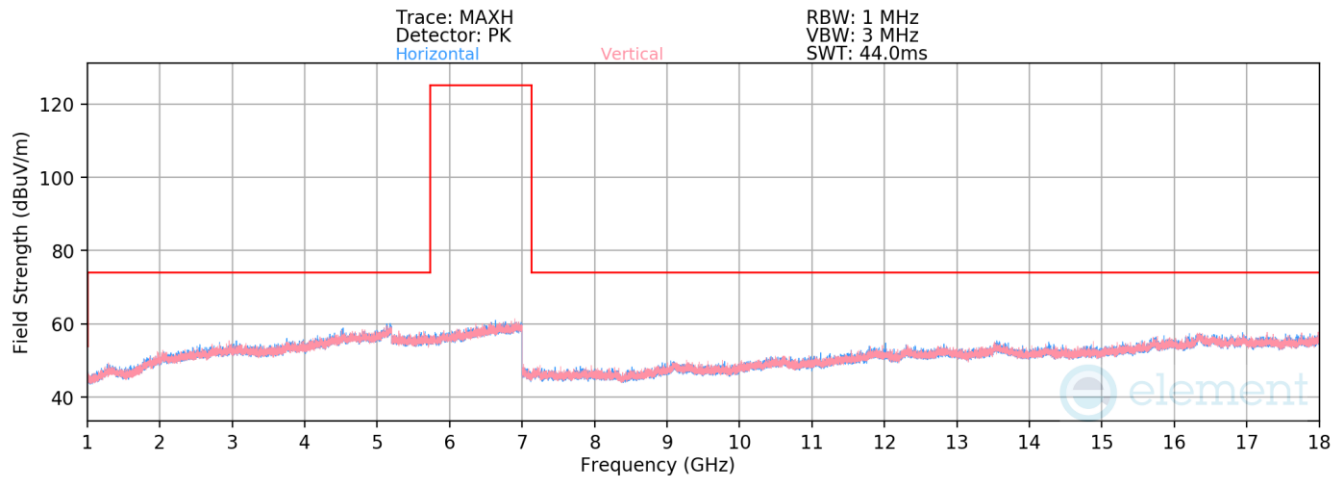

Plot 7-724. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 45 – RU26)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6175MHz
Channel: 45


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12350.00	Peak	H	-	-	-72.44	17.83	52.39	73.98	-21.59
* 12350.00	Average	H	-	-	-84.19	17.83	40.64	53.98	-13.34

Table 7-101. Radiated Spurious Emission Measurements SDM – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 234 of 324

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

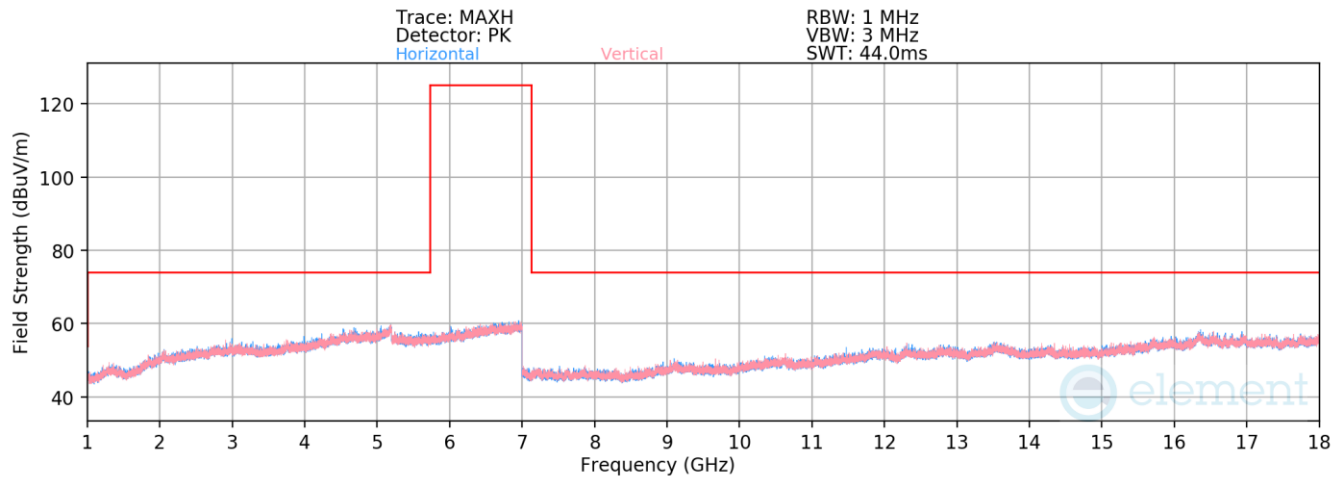

Plot 7-725. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 93 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12830.00	Average	H	-	-	-84.17	18.55	41.38	68.20	-26.82

Table 7-102. Radiated Spurious Emission Measurements SDM – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 235 of 324

V 10.5 12/15/2021

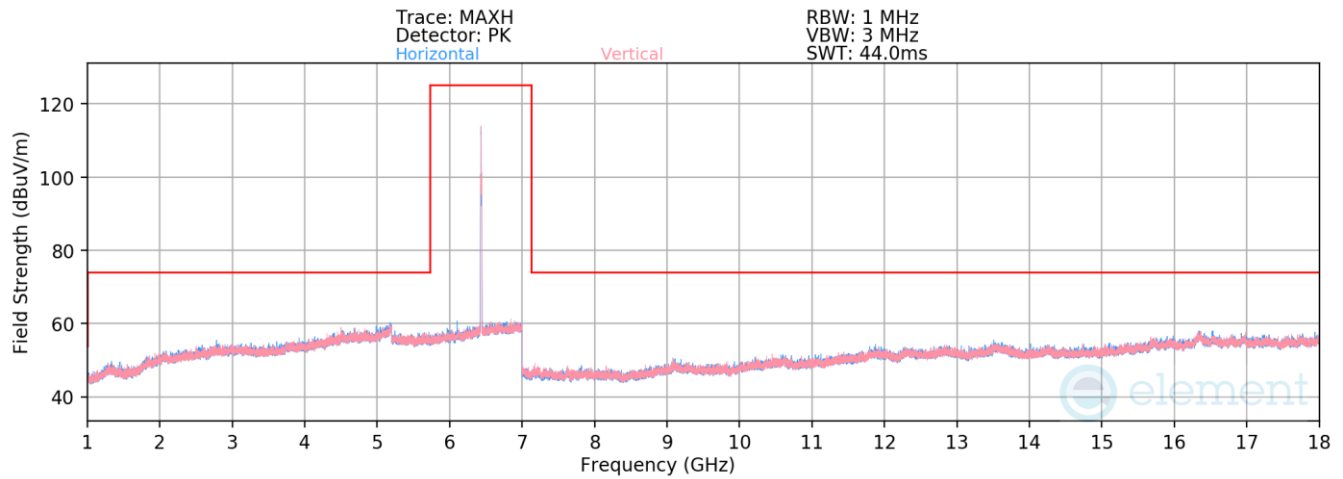

Plot 7-726. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 97 – RU26)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435MHz
Channel: 97


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12870.00	Average	H	-	-	-83.92	18.68	41.76	68.20	-26.44

Table 7-103. Radiated Spurious Emission Measurements SDM – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 236 of 324

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

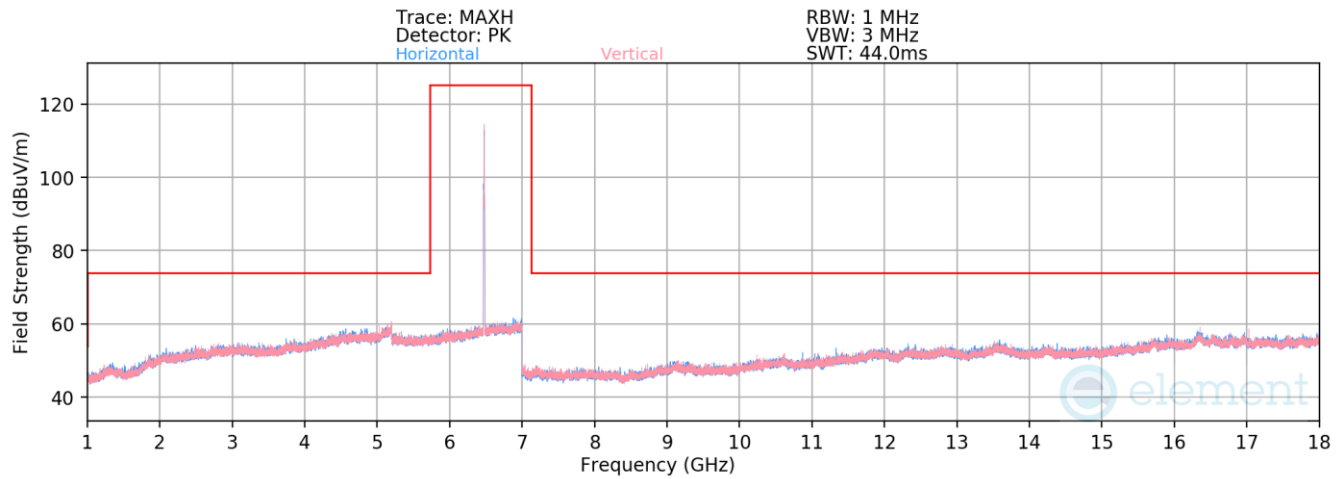

Plot 7-727. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 105 – RU26)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6475MHz
Channel: 105


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12950.00	Average	H	-	-	-83.73	18.16	41.43	68.20	-26.77

Table 7-104. Radiated Spurious Emission Measurements SDM – RU26


FCC ID: BCGA2764 IC: 579C-A2764			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 237 of 324	

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

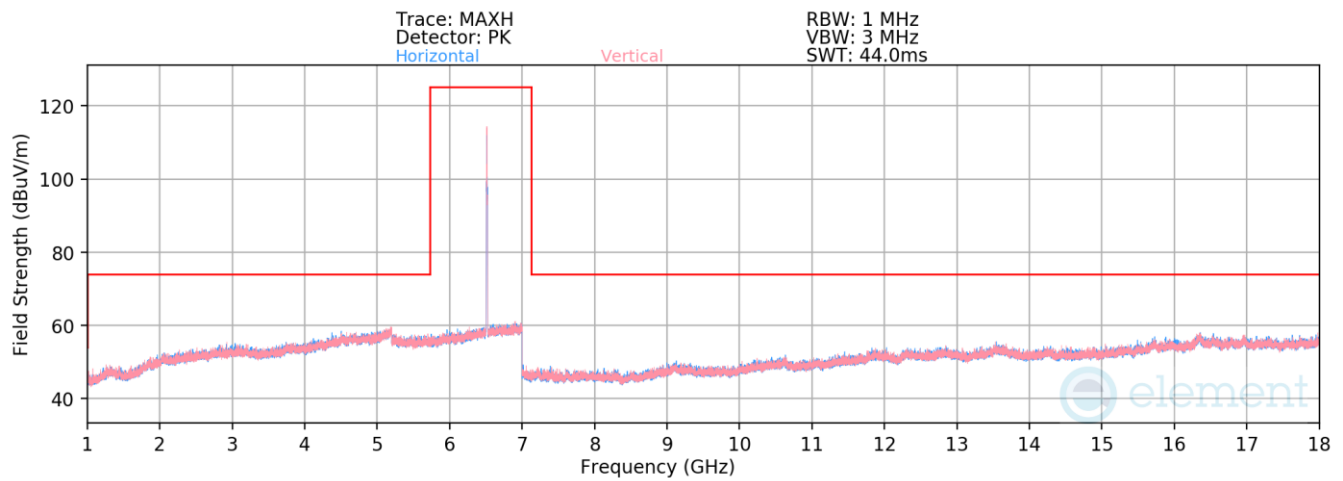

Plot 7-728. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 113 – RU26)

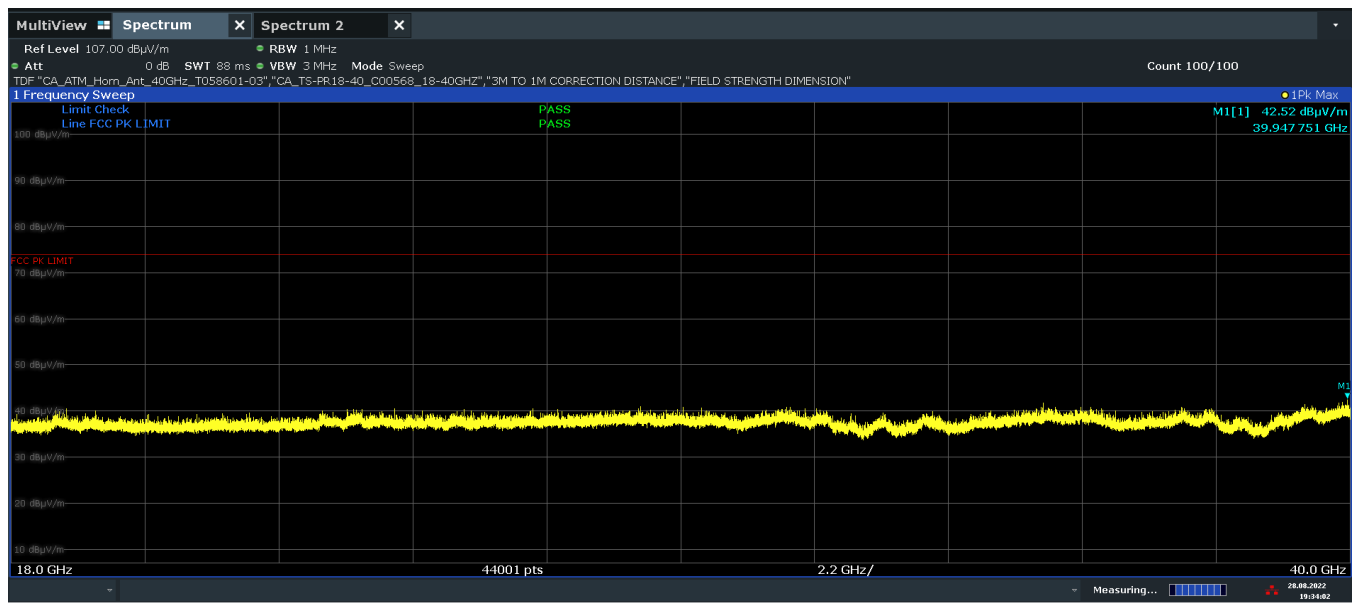


Plot 7-729. Radiated Spurious Emissions 18-40GHz SDM (802.11ax – Ch. 113 – RU26, Pol. H)

FCC ID: BCGA2764 IC: 579C-A2764	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 238 of 324

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

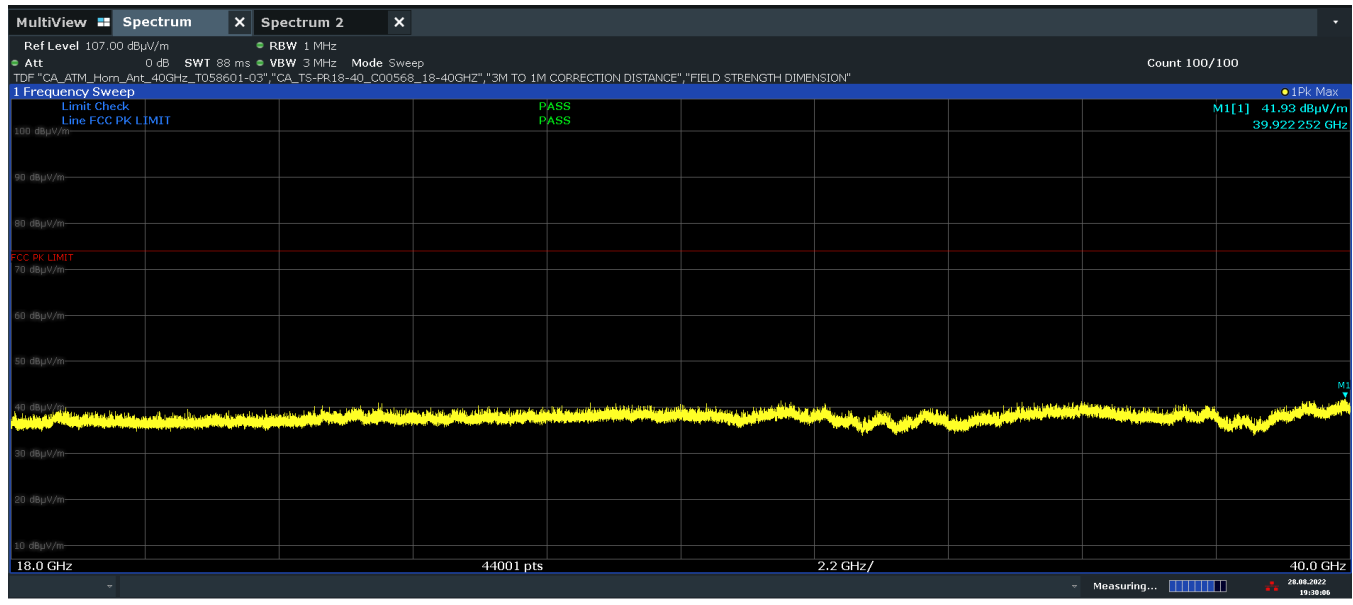

19:30:06 28.08.2022

Plot 7-730. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 113 – RU26, Pol. V)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6515MHz
 Channel: 113


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13030.00	Average	H	-	-	-83.88	18.52	41.64	68.20	-26.56

Table 7-105. Radiated Spurious Emission Measurements SDM – RU26

FCC ID: BCGA2764 IC: 579C-A2764			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 239 of 324	

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

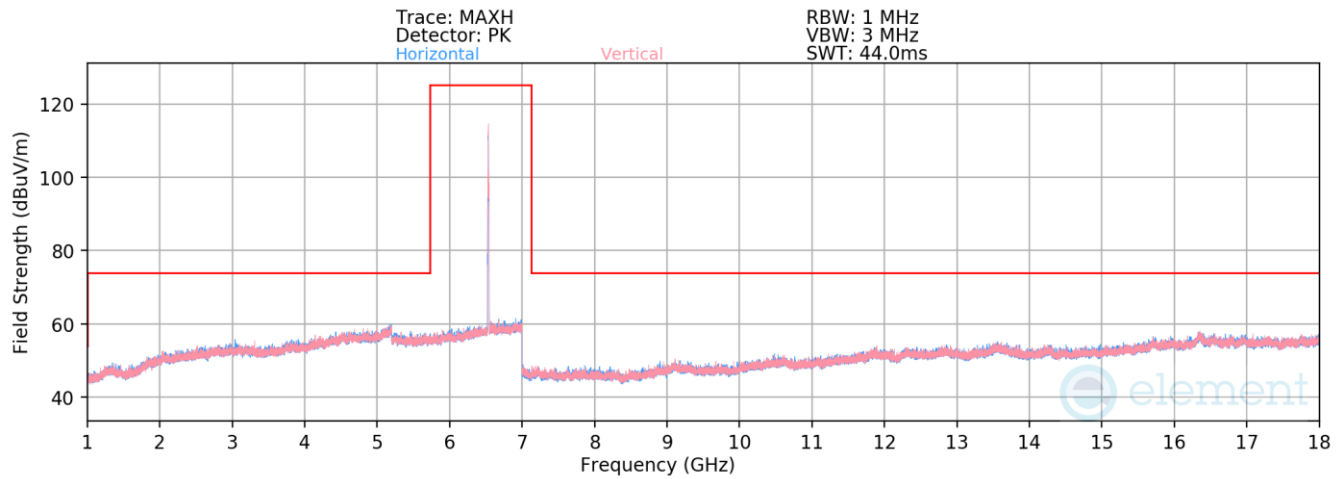

Plot 7-731. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 117 – RU26)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535MHz
Channel: 117


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13070.00	Average	H	-	-	-83.86	18.31	41.45	68.20	-26.75

Table 7-106. Radiated Spurious Emission Measurements SDM – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 240 of 324

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

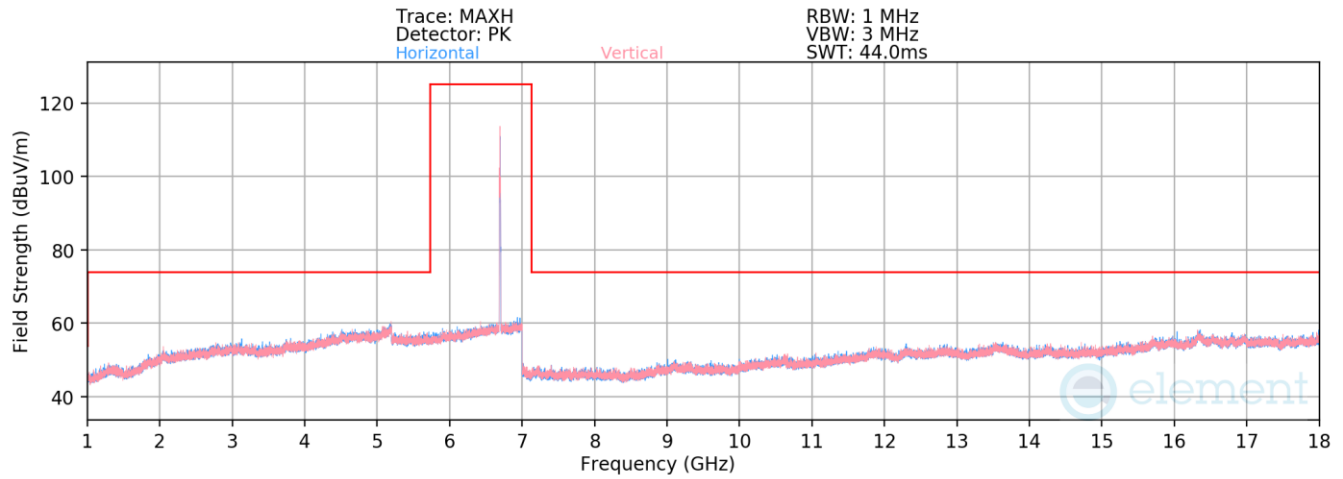

Plot 7-732. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 149 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6695MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 13390.00	Peak	H	-	-	-72.33	18.01	52.68	73.98	-21.30
* 13390.00	Average	H	-	-	-83.98	18.01	41.03	53.98	-12.95


Table 7-107. Radiated Spurious Emission Measurements SDM – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 241 of 324

V 10.5 12/15/2021

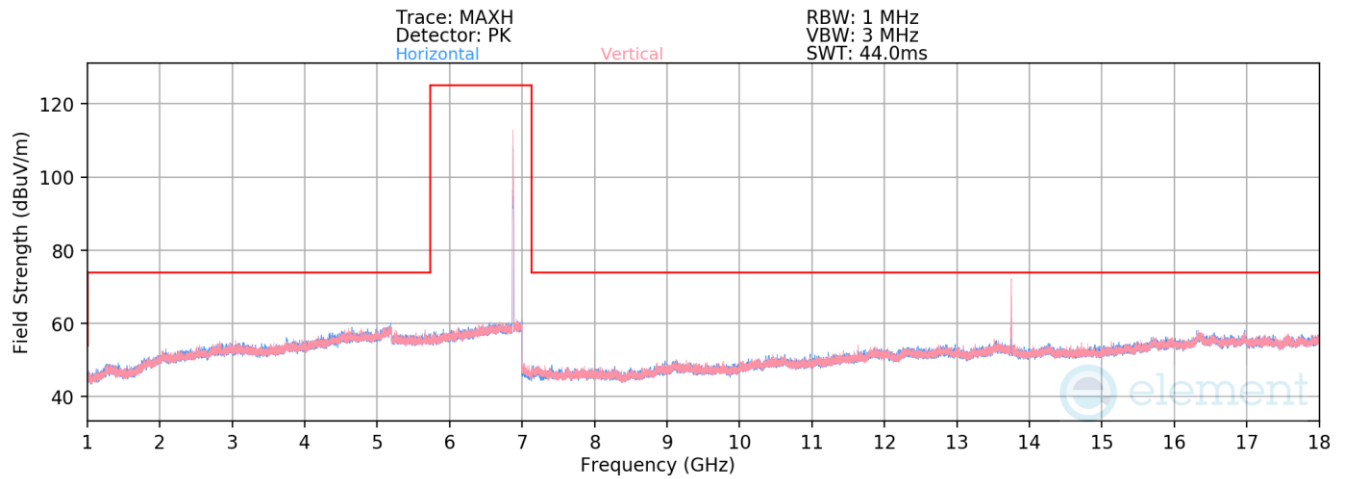

Plot 7-733. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 185 – RU26)

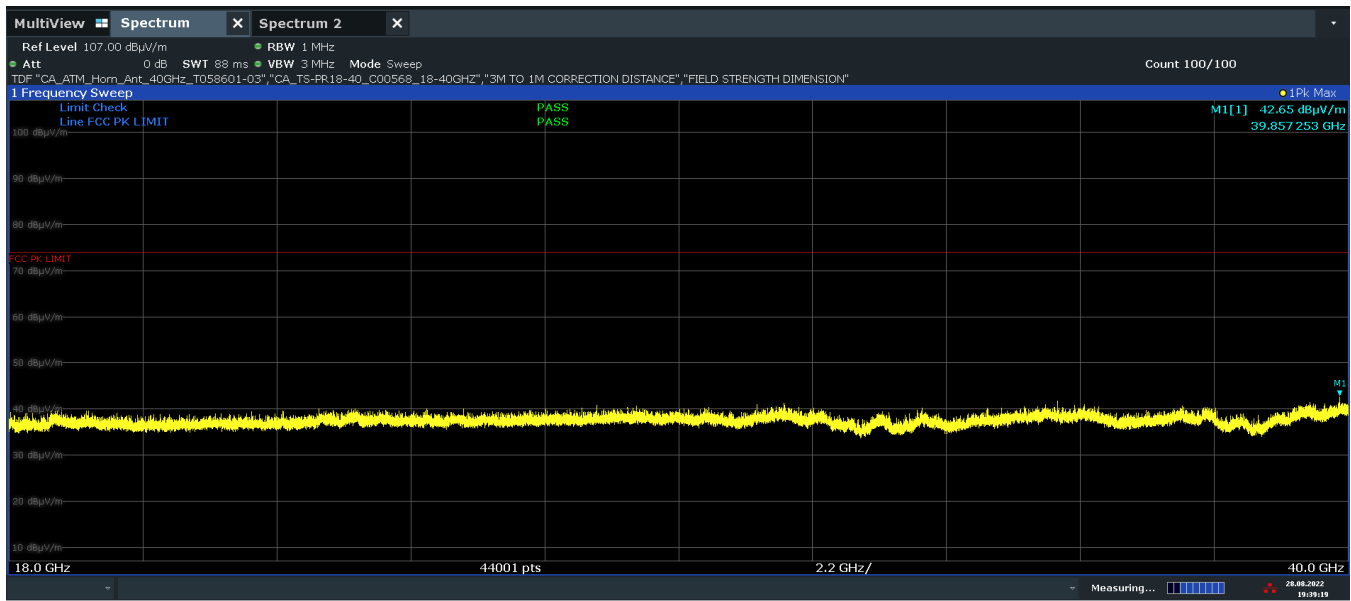


Plot 7-734. Radiated Spurious Emissions 18-40GHz SDM (802.11ax – Ch. 185 – RU26, Pol. H)

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 242 of 324

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

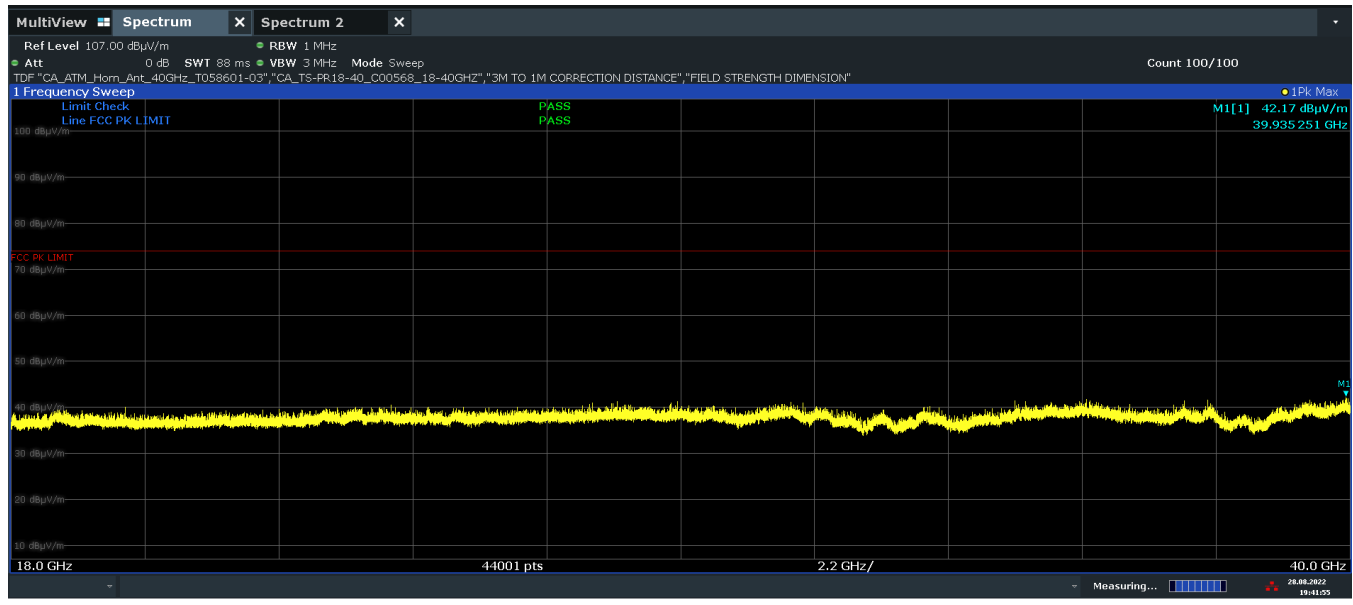

Plot 7-735. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 185 – RU26, Pol. V)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6875MHz
 Channel: 185


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13750.00	Average	H	-	-	-82.71	17.84	42.13	68.20	-26.07

Table 7-108. Radiated Spurious Emission Measurements SDM – RU26

FCC ID: BCGA2764 IC: 579C-A2764	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 243 of 324

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

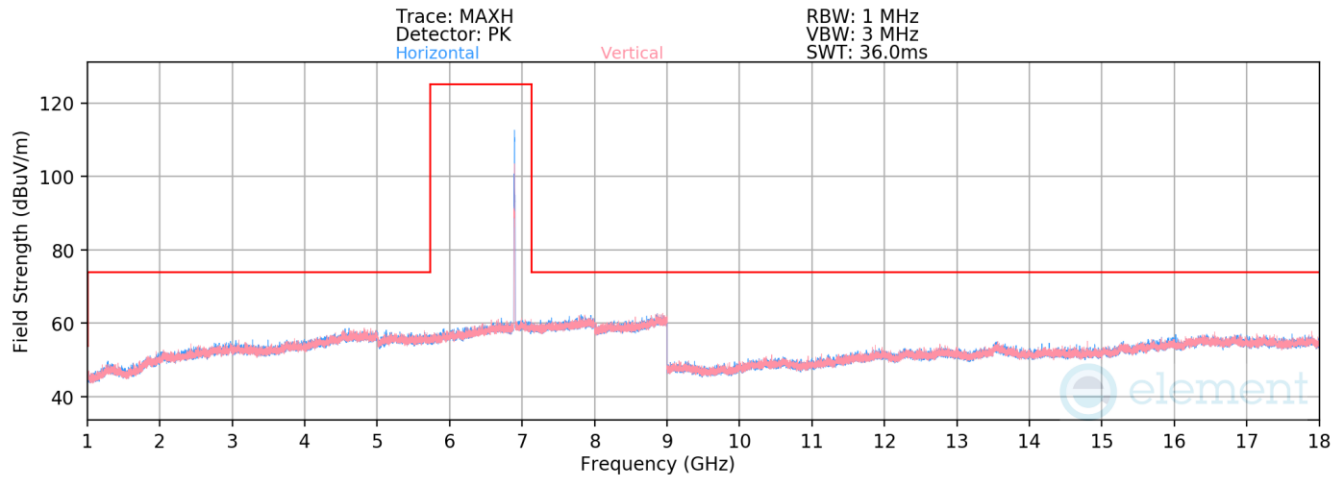

Plot 7-736. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 189 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895MHz
Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13750.00	Average	H	-	-	-83.18	17.84	41.66	68.20	-26.54

Table 7-109. Radiated Spurious Emission Measurements SDM – RU26

FCC ID: BCGA2764 IC: 579C-A2764	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 244 of 324

V 10.5 12/15/2021

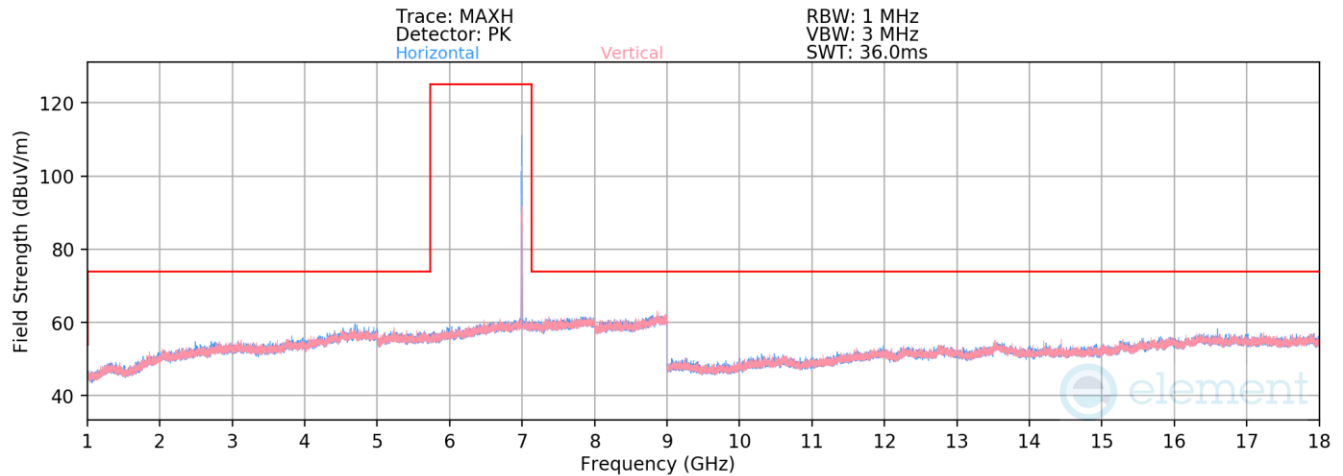

Plot 7-737. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 209 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6995MHz
Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Average	H	-	-	-83.26	17.91	41.65	68.20	-26.55


Table 7-110. Radiated Spurious Emission Measurements SDM – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 245 of 324

V 10.5 12/15/2021

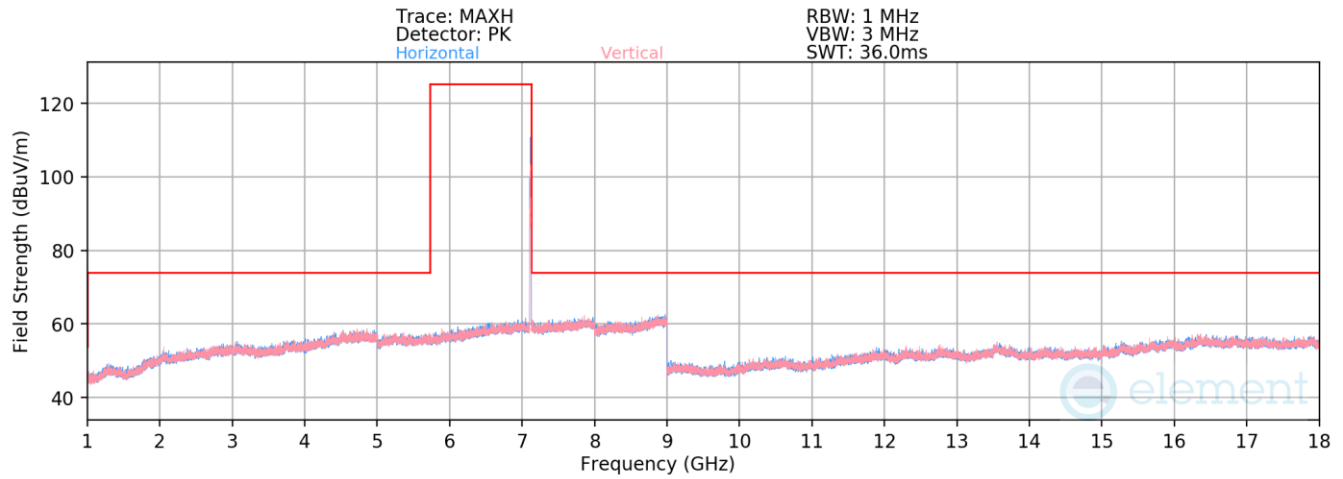

Plot 7-738. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 229 – RU26)

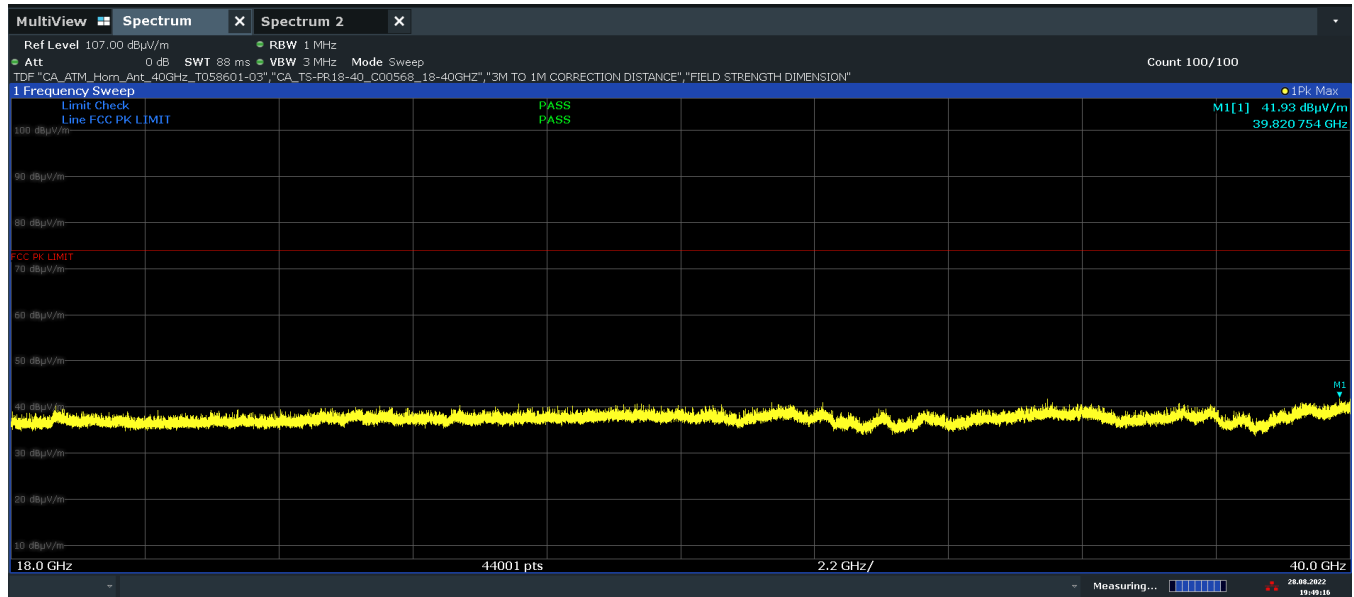


19:49:16 28.08.2022

Plot 7-739. Radiated Spurious Emissions 18-40GHz SDM (802.11ax – Ch. 1 – RU26, Pol. H)

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 246 of 324

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

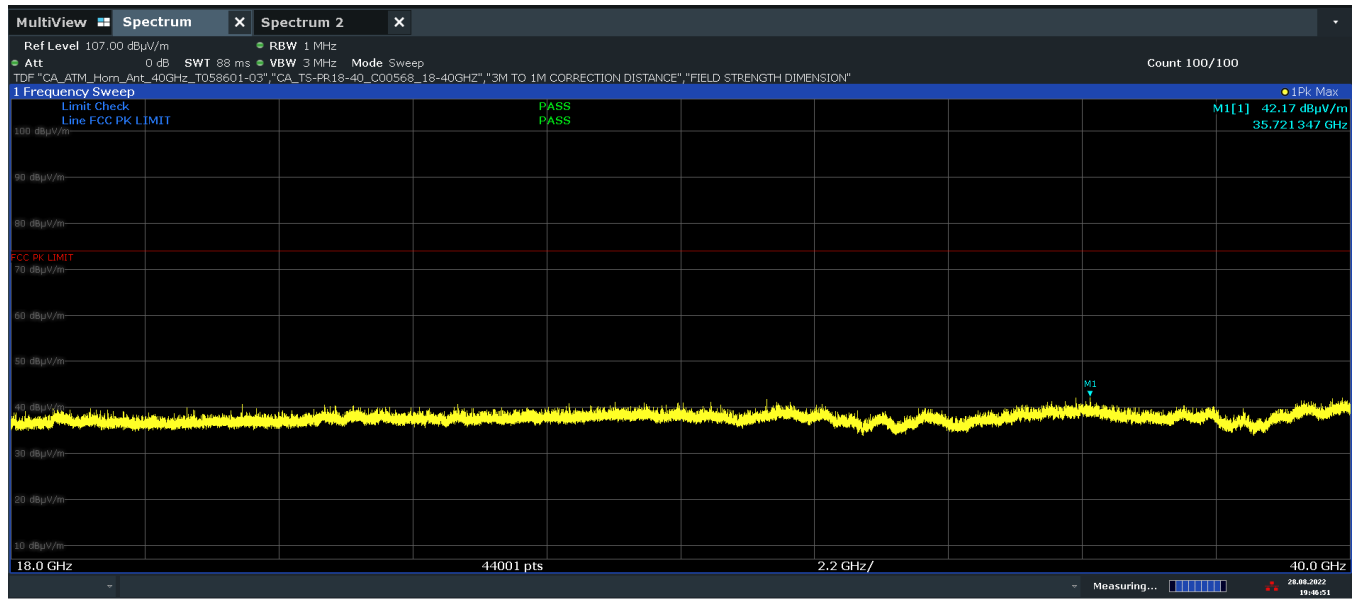

Plot 7-740. Radiated Spurious Emissions 18-40GHz SDM (802.11ax – Ch. 1 – RU26, Pol. V)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 7095MHz
 Channel: 229

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
14230.00	Average	H	-	-	-84.91	18.64	40.73	68.20	-27.47


Table 7-111. Radiated Spurious Emission Measurements SDM – RU26

FCC ID: BCGA2764 IC: 579C-A2764	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 247 of 324


V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

RU242

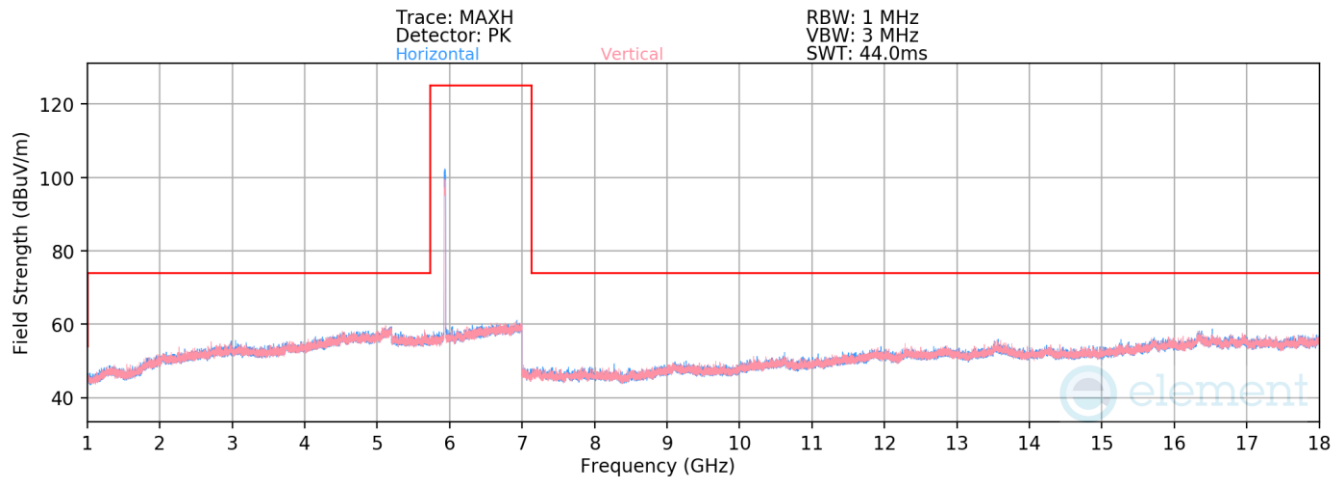

Plot 7-741. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 1 – RU242)

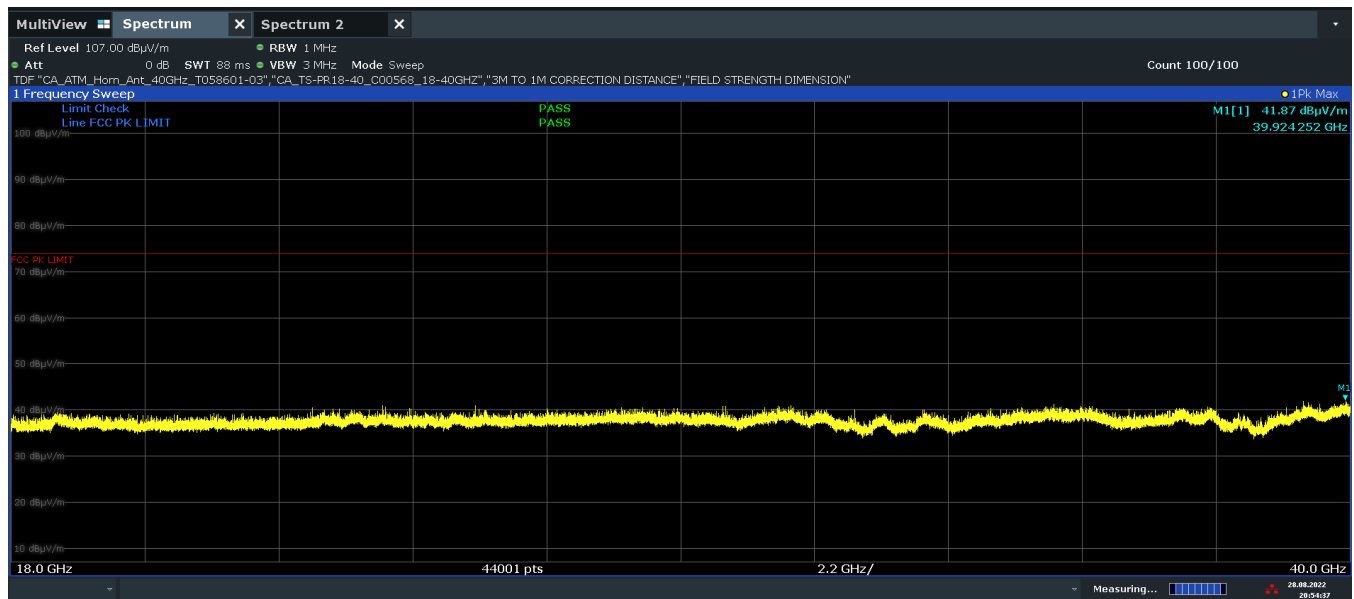


Plot 7-742. Radiated Spurious Emissions 18-40GHz SDM (802.11ax – Ch. 1 – RU242, Pol. H)

FCC ID: BCGA2764 IC: 579C-A2764	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 248 of 324

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

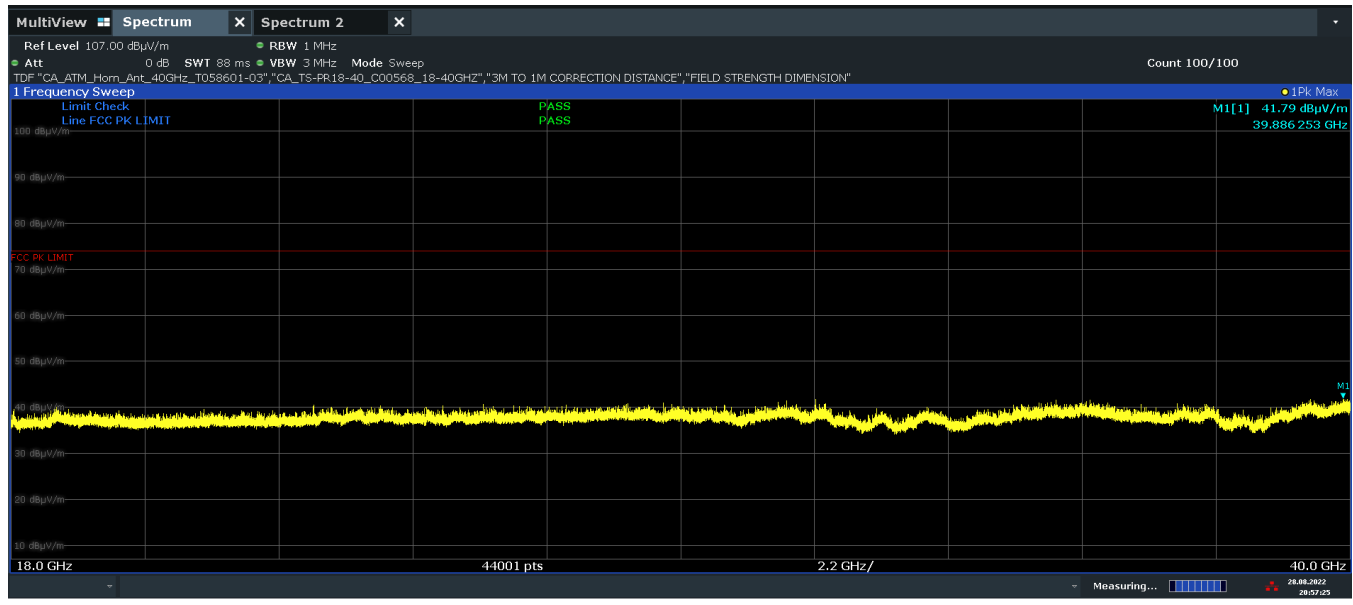

Plot 7-743. Radiated Spurious Emissions 18-40GHz SDM (802.11ax – Ch. 1 – RU242, Pol. V)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5955MHz
 Channel: 1


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11870.00	Peak	H	-	-	-72.18	16.96	51.78	73.98	-22.20
* 11870.00	Average	H	-	-	-83.51	16.96	40.45	53.98	-13.53
* 17805.00	Peak	H	-	-	-72.99	21.89	55.90	73.98	-18.08
* 17805.00	Average	H	-	-	-84.08	21.89	44.81	53.98	-9.17

Table 7-112. Radiated Spurious Emission Measurements SDM – RU242

FCC ID: BCGA2764 IC: 579C-A2764	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 249 of 324

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

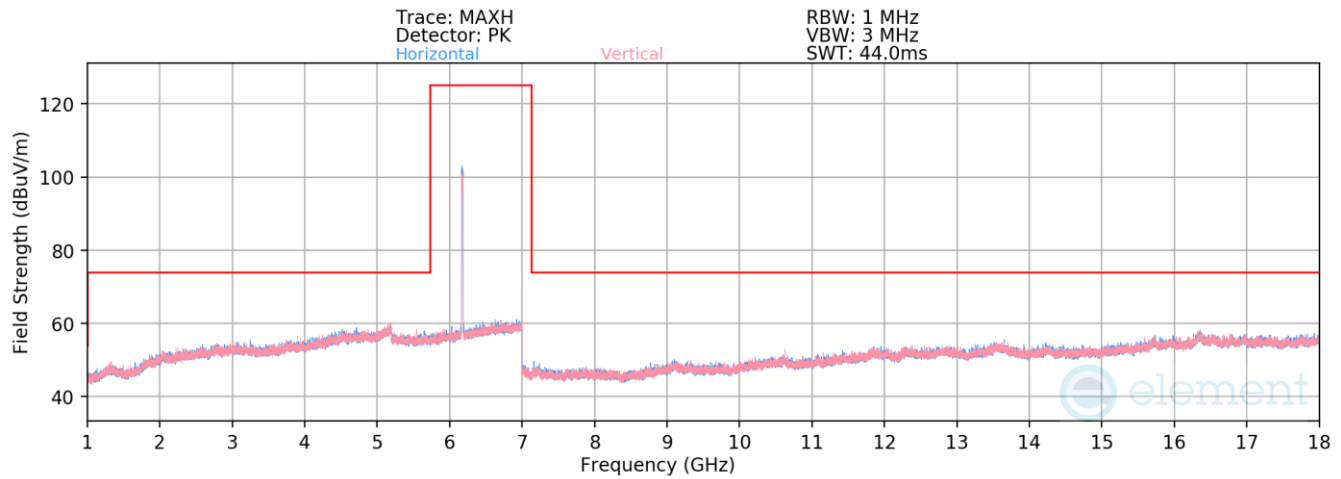

Plot 7-744. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 45 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6175MHz
Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12350.00	Peak	H	-	-	-72.40	17.83	52.43	73.98	-21.55
* 12350.00	Average	H	-	-	-84.18	17.83	40.65	53.98	-13.33

Table 7-113. Radiated Spurious Emission Measurements SDM – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 250 of 324

V 10.5 12/15/2021

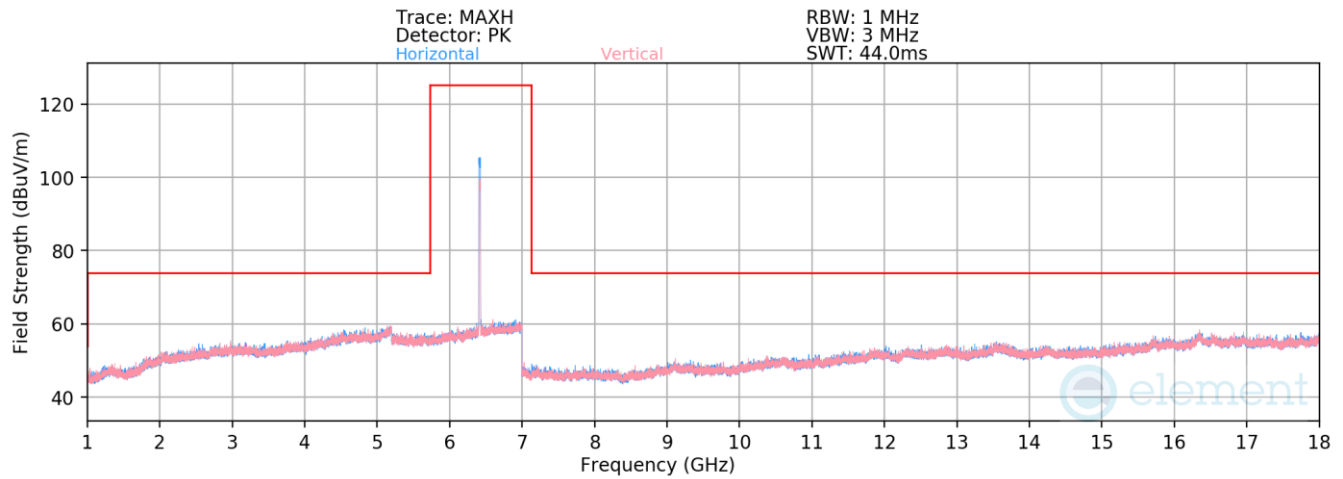

Plot 7-745. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 93 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12830.00	Average	H	-	-	-84.30	18.55	41.25	68.20	-26.95

Table 7-114. Radiated Spurious Emission Measurements SDM – RU242

FCC ID: BCGA2764 IC: 579C-A2764			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 251 of 324	

V 10.5 12/15/2021

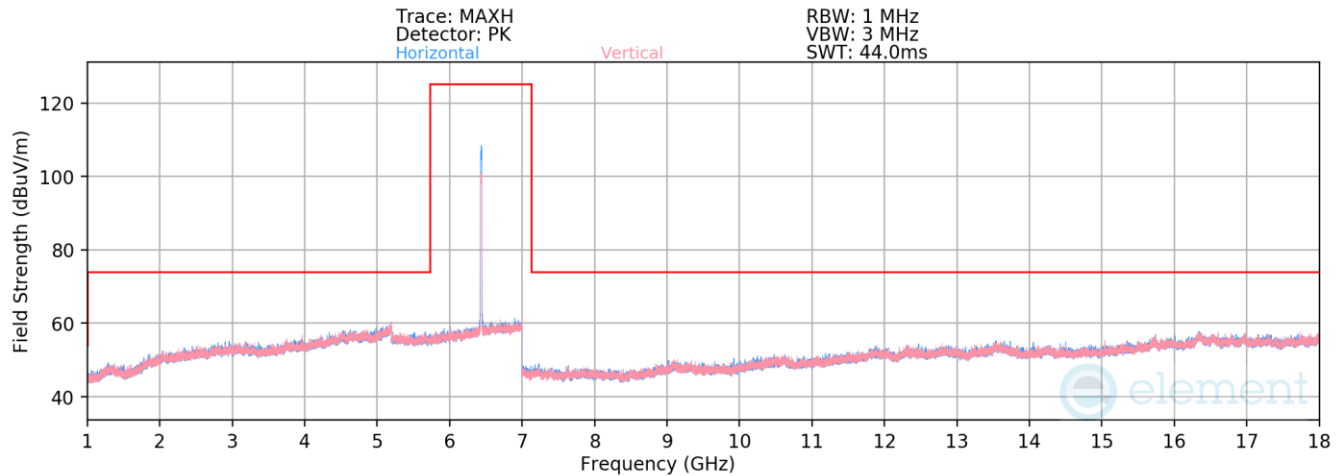

Plot 7-746. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 97 – RU242)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435MHz
Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12870.00	Average	H	-	-	-83.91	18.68	41.77	68.20	-26.43

Table 7-115. Radiated Spurious Emission Measurements SDM – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R3.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 252 of 324

V 10.5 12/15/2021