




## Element Materials Technology

(formerly PCTEST)  
18855 Adams Court, Morgan Hill, CA 95037 USA  
Tel. 408.538.5600  
<http://www.element.com>



### MEASUREMENT REPORT

#### FCC PART 15.407/ ISCED RSS-247 Narrowband UNII HDR

**Applicant Name:**

Apple Inc.  
One Apple Park Way  
Cupertino, CA 95014  
United States

**Date of Testing:**

11/28/2023 - 3/20/2024

**Test Report Issue Date:**

4/1/2024

**Test Site/Location:**

Element Materials Technology Morgan Hill, CA, USA

**Test Report Serial No.:**

1C2311270068-20.BCG

**FCC ID:**

BCGA2837

**IC:**

579C-A2837

**APPLICANT:**

Apple Inc.

**Application Type:**

Certification

**Model/HVIN:**

A2837, A3006

**EUT Type:**

Tablet Device

**Frequency Range:**

5162 – 5245MHz, 5733 – 5844MHz

**Modulation Type:**

$\pi/4$  DQPSK

**FCC Classification:**

Unlicensed National Information Infrastructure (UNII)

**FCC Rule Part(s):**

Part 15 Subpart E (15.407)

**ISCED Specification:**

RSS-247 Issue 3

**Test Procedure(s):**

ANSI C63.10-2013, KDB 789033 D02 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez  
Executive Vice President

Prepared by: WKR0000010551

Reviewed by: WKR0000005805



|                                         |                                       |                                       |                                   |
|-----------------------------------------|---------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |                                       | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024 | EUT Type:<br>Tablet Device            | Page 1 of 176                     |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).


# TABLE OF CONTENTS

|       |                                                             |     |
|-------|-------------------------------------------------------------|-----|
| 1.0   | INTRODUCTION .....                                          | 4   |
| 1.1   | Scope .....                                                 | 4   |
| 1.2   | Element Materials Technology Test Location .....            | 4   |
| 1.3   | Test Facility / Accreditations .....                        | 4   |
| 2.0   | PRODUCT INFORMATION .....                                   | 5   |
| 2.1   | Equipment Description .....                                 | 5   |
| 2.2   | Device Capabilities .....                                   | 5   |
| 2.3   | Antenna Description .....                                   | 7   |
| 2.4   | Test Support Equipment .....                                | 7   |
| 2.5   | Test Configuration .....                                    | 8   |
| 2.6   | Software and Firmware .....                                 | 8   |
| 2.7   | EMI Suppression Device(s)/Modifications .....               | 8   |
| 3.0   | DESCRIPTION OF TESTS .....                                  | 9   |
| 3.1   | Evaluation Procedure .....                                  | 9   |
| 3.2   | AC Line Conducted Emissions .....                           | 9   |
| 3.3   | Radiated Emissions .....                                    | 10  |
| 3.4   | Environmental Conditions .....                              | 10  |
| 4.0   | ANTENNA REQUIREMENTS .....                                  | 11  |
| 5.0   | MEASUREMENT UNCERTAINTY .....                               | 12  |
| 6.0   | TEST EQUIPMENT CALIBRATION DATA .....                       | 13  |
| 7.0   | TEST RESULTS .....                                          | 14  |
| 7.1   | Summary .....                                               | 14  |
| 7.2   | 26dB & 99% Bandwidth Measurement – HDR .....                | 15  |
| 7.2.1 | Antenna 5b 26dB & 99% Bandwidth Measurements .....          | 16  |
| 7.2.2 | Antenna 4a 26dB & 99% Bandwidth Measurements .....          | 20  |
| 7.2.3 | Antenna 2a 26dB & 99% Bandwidth Measurements .....          | 24  |
| 7.3   | 6dB & 99% Bandwidth Measurement – HDR .....                 | 28  |
| 7.3.1 | Antenna 5b 6dB & 99% Bandwidth Measurements .....           | 29  |
| 7.3.2 | Antenna 4a 6dB & 99% Bandwidth Measurements .....           | 33  |
| 7.3.3 | Antenna 2a 6dB & 99% Bandwidth Measurements .....           | 37  |
| 7.4   | Conducted Output Power and Max EIRP Measurement – HDR ..... | 41  |
| 7.4.1 | Conducted Output Power Measurements .....                   | 42  |
| 7.5   | Maximum Power Spectral Density – HDR .....                  | 51  |
| 7.5.1 | Antenna 5b Power Spectral Density Measurements .....        | 52  |
| 7.5.2 | Antenna 4a Power Spectral Density Measurements .....        | 69  |
| 7.5.3 | Antenna 2a Power Spectral Density Measurements .....        | 83  |
| 7.5.4 | TxBF Power Spectral Density Measurements .....              | 97  |
| 7.6   | Radiated Spurious Emission – Above 1GHz .....               | 130 |
| 7.6.1 | Antenna 5b Radiated Spurious Emission (1-18GHz) .....       | 133 |
| 7.6.2 | Antenna 4a Radiated Spurious Emission (1-18GHz) .....       | 139 |
| 7.6.3 | Antenna 2a Radiated Spurious Emission (1-18GHz) .....       | 145 |
| 7.6.4 | TxBF Radiated Spurious Emission (Above 1GHz) .....          | 151 |
| 7.6.5 | Radiated Band Edge Measurements .....                       | 157 |
| 7.7   | Radiated Spurious Emissions – Below 1GHz .....              | 165 |
| 7.8   | AC Line Conducted Emissions Measurement .....               | 170 |
| 8.0   | CONCLUSION .....                                            | 176 |


|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 2 of 176                     |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



## MEASUREMENT REPORT



| UNII Band | Tx Frequency [MHz] | Mode | Power Scheme | SISO            |                  |                 |                  |                 |                  | TxBF            |                  |                 |                  |                 |                  |
|-----------|--------------------|------|--------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|
|           |                    |      |              | Antenna 5b      |                  | Antenna 4a      |                  | Antenna 2a      |                  | Antenna 5b      |                  | Antenna 4a      |                  | Summed          |                  |
|           |                    |      |              | Max. Power [mW] | Max. Power [dBm] | Max. Power [mW] | Max. Power [dBm] | Max. Power [mW] | Max. Power [dBm] | Max. Power [mW] | Max. Power [dBm] | Max. Power [mW] | Max. Power [dBm] | Max. Power [mW] | Max. Power [dBm] |
| 1         | 5162 - 5245        | HDR4 | ePA          | 15.03           | 11.77            | 6.75            | 8.30             | 7.87            | 8.96             | 8.89            | 9.49             | 6.64            | 8.22             | 15.52           | 11.91            |
|           |                    | HDR8 | ePA          | 14.85           | 11.72            | 7.08            | 8.50             | 7.89            | 8.97             | 14.58           | 11.64            | 6.97            | 8.43             | 21.13           | 13.25            |
|           |                    | HDR4 | iPA          | 0.63            | -2.00            | 1.25            | 0.98             | 0.62            | -2.06            | 0.63            | -2.00            | 1.24            | 0.94             | 1.86            | 2.69             |
|           |                    | HDR8 | iPA          | 0.63            | -2.00            | 1.26            | 0.99             | 0.62            | -2.11            | 0.63            | -2.03            | 1.25            | 0.96             | 1.87            | 2.73             |
| 3         | 5733 - 5844        | HDR4 | ePA          | 17.30           | 12.38            | 9.84            | 9.93             | 12.42           | 10.94            | 16.68           | 12.22            | 9.84            | 9.93             | 26.55           | 14.24            |
|           |                    | HDR8 | ePA          | 17.10           | 12.33            | 9.93            | 9.97             | 12.47           | 10.96            | 17.02           | 12.31            | 9.97            | 9.99             | 26.98           | 14.31            |
|           |                    | HDR4 | iPA          | 0.78            | -1.06            | 1.56            | 1.93             | 0.78            | -1.08            | 0.78            | -1.10            | 1.55            | 1.91             | 2.32            | 3.65             |
|           |                    | HDR8 | iPA          | 0.75            | -1.23            | 1.55            | 1.89             | 0.77            | -1.16            | 0.79            | -1.03            | 1.52            | 1.83             | 2.28            | 3.57             |

### FCC EUT Overview

| UNII Band | Tx Frequency [MHz] | Mode | Power Scheme | SISO            |                  |                 |                  |                 |                  | TxBF            |                  |                 |                  |                 |                  |
|-----------|--------------------|------|--------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|
|           |                    |      |              | Antenna 5b      |                  | Antenna 4a      |                  | Antenna 2a      |                  | Antenna 5b      |                  | Antenna 4a      |                  | Summed          |                  |
|           |                    |      |              | Max. Power [mW] | Max. Power [dBm] | Max. Power [mW] | Max. Power [dBm] | Max. Power [mW] | Max. Power [dBm] | Max. Power [mW] | Max. Power [dBm] | Max. Power [mW] | Max. Power [dBm] | Max. Power [mW] | Max. Power [dBm] |
| 1         | 5162 - 5245        | HDR4 | ePA          | 7.69            | 8.86             | 7.03            | 8.47             | 7.88            | 8.97             | 1.93            | 2.85             | 3.49            | 5.43             | 5.40            | 7.32             |
|           |                    | HDR8 | ePA          | 14.13           | 11.50            | 6.93            | 8.41             | 7.94            | 9.00             | 3.54            | 5.49             | 6.15            | 7.89             | 9.51            | 9.78             |
|           |                    | HDR4 | iPA          | 0.62            | -2.07            | 1.24            | 0.93             | 0.63            | -2.03            | 0.63            | -2.02            | 1.25            | 0.98             | 1.87            | 2.73             |
|           |                    | HDR8 | iPA          | 0.63            | -2.00            | 1.26            | 1.00             | 0.62            | -2.10            | 0.61            | -2.11            | 1.22            | 0.87             | 1.82            | 2.60             |
| 3         | 5733 - 5844        | HDR4 | ePA          | 17.30           | 12.38            | 9.84            | 9.93             | 12.42           | 10.94            | 16.68           | 12.22            | 9.84            | 9.93             | 26.55           | 14.24            |
|           |                    | HDR8 | ePA          | 17.10           | 12.33            | 9.93            | 9.97             | 12.47           | 10.96            | 17.02           | 12.31            | 9.97            | 9.99             | 26.98           | 14.31            |
|           |                    | HDR4 | iPA          | 0.78            | -1.06            | 1.56            | 1.93             | 0.78            | -1.08            | 0.78            | -1.10            | 1.55            | 1.91             | 2.32            | 3.65             |
|           |                    | HDR8 | iPA          | 0.75            | -1.23            | 1.55            | 1.89             | 0.77            | -1.16            | 0.79            | -1.03            | 1.52            | 1.83             | 2.28            | 3.57             |

### ISED EUT Overview

|                                         |                                                                                     |                            |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|----------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  |                            | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device |                                       | Page 3 of 176                     |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

### 1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology.

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB# US0110) for ISED Canada as designed by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 4 of 176                     |

V 10.5 12/15/2021

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2837, IC: 579C-A2837**. The test data contained in this report pertains only to the emissions due to the EUT's Narrowband UNII transmitter.

- This Narrowband UNII module has been tested by manufacturer and the following were confirmed:
  - A) The hopping sequence is pseudorandom
  - B) 79 channels can be used at a time for hopping
  - C) The receiver input bandwidth equals the transmit bandwidth
  - D) The receiver hops in sequence with the transmit signal
  - E) Narrowband UNII can only hop within the same UNII band and cannot hop between bands

**Test Device Serial No.:** FLYQYPVW7Q, N4LP6X9FG4, DWC2PQLW19, DLXH1C000140000662

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, 802.11a/ax WIFI 6E, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), WPT, NB UNII (1x, HDR4, HDR8), 802.15.4.

This device supports BT Beamforming.

| Band 1          | Band 3          |
|-----------------|-----------------|
| Frequency (MHz) | Frequency (MHz) |
| 5162            | 5733            |
| :               | :               |
| 5204            | 5789            |
| :               | :               |
| 5245            | 5844            |

**Table 2-1. NB UNII HDR Frequency / Channel Operations**

**Note:**

This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 79 different channels in the U-NII Band 1 & U-NII Band 3. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of KDB 789033 D02 v02r01 and ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

| Measured Duty Cycles |      |     |                |
|----------------------|------|-----|----------------|
| Band                 | Mode |     | Duty Cycle [%] |
| UNII-1               | HDR4 | ePA | 100.0          |
|                      |      | iPA | 100.0          |
| UNII-3               | HDR4 | ePA | 100.0          |
|                      |      | iPA | 100.0          |
| UNII-1               | HDR8 | ePA | 100.0          |
|                      |      | iPA | 100.0          |
| UNII-3               | HDR8 | ePA | 100.0          |
|                      |      | iPA | 100.0          |

**Table 2-2. Measured Duty Cycles**

|                                         |                                                                                                                                   |                            |                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                             | EUT Type:<br>Tablet Device | Page 5 of 176                     |

V 10.5 12/15/2021

This device supports simultaneous transmission operations. The table below shows all configurations possible.

| Antenna | Simultaneous Tx Config | Wifi 2GHz       | Bluetooth                | Thread   | Wifi 5GHz        | Wifi 6GHz   | NB UNII     | LTE/FR1 NR |     |
|---------|------------------------|-----------------|--------------------------|----------|------------------|-------------|-------------|------------|-----|
|         |                        | 802.11 b/g/n/ax | BDR, EDR, HDR4/8, LE1/2M | 802.15.4 | 802.11 a/n/ac/ax | 802.11 a/ax | BDR, HDR4/8 | MB/HB      | UHB |
| 2a      | Config 1               | X               | ✓                        | X        | ✓                | X           | X           | X          | X   |
| 2a      | Config 2               | X               | ✓                        | X        | X                | ✓           | X           | X          | X   |
| 2a      | Config 3               | ✓               | X                        | X        | X                | X           | ✓           | X          | X   |
| 2a      | Config 4               | X               | X                        | ✓        | ✓                | X           | X           | X          | X   |
| 2a      | Config 5               | X               | X                        | ✓        | X                | ✓           | X           | X          | X   |
| 4a      | Config 6               | X               | ✓                        | X        | ✓                | X           | X           | X          | X   |
| 4a      | Config 7               | X               | ✓                        | X        | X                | ✓           | X           | X          | X   |
| 4a      | Config 8               | ✓               | X                        | X        | X                | X           | ✓           | X          | X   |
| 4a      | Config 9               | X               | X                        | ✓        | ✓                | X           | X           | X          | X   |
| 4a      | Config 10              | X               | X                        | ✓        | X                | ✓           | X           | X          | X   |

**Table 2-3. Simultaneous Transmission Configurations**

✓ = Support; ✗ = Not Support

**Note:**

All of the above simultaneous transmission configurations have been tested and the worst case configuration was found to be Config 1 and reported in RF Bluetooth and RF UNII OFDM test reports.

Specific 2.4 GHz Wi-Fi antenna that can only transmit simultaneously with 2.4GHz Bluetooth antenna is listed in the SAR test report. For BT (2.4GHz) in connected mode with Wi-Fi (2.4GHz) – Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. For BT (2.4GHz) in disconnected mode and Wi-Fi (2.4GHz) – BT will be using iPA only and Wi-Fi max power will not exceed minimum of (SAR max cap, Reg max cap) power. Bluetooth can simultaneously transmit with IEEE 802.11a/n/ac/ax 5/6 GHz on separate antenna.

|                                         |                                                                                                                                   |                            |                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                             | EUT Type:<br>Tablet Device | Page 6 of 176                     |

V 10.5 12/15/2021

## 2.3 Antenna Description

The following antenna gains provided by the manufacturer were used for testing.

| Frequency [MHz] | Antenna Gain (dBi) |            |            |
|-----------------|--------------------|------------|------------|
|                 | Antenna 5b         | Antenna 4a | Antenna 2a |
| 5162 - 5245     | 2.2                | -0.3       | -1.1       |
| 5733 – 5844     | 0.4                | 0.4        | -1.7       |

**Table 2-4. Highest Antenna Gain**

## 2.4 Test Support Equipment

|   |                                      |                              |                                                  |
|---|--------------------------------------|------------------------------|--------------------------------------------------|
| 1 | Apple MacBook Pro<br>w/AC/DC Adapter | Model: A2141<br>Model: A2166 | S/N: C02H604EQ05D<br>S/N: C4H042705ZNPM0WA6      |
| 2 | Apple USB-C Cable                    | Model: Spartan               | S/N: GXK1336018XKTR024                           |
| 3 | USB-C Cable<br>w/ AC Adapter         | Model: A246C<br>Model: A2305 | S/N: DWH80115BK826GV19<br>S/N: C4H95160004PF4F4V |
| 4 | Apple Pencil                         | Model: A2538                 | S/N: KJ26TCFXJW                                  |
| 5 | DC Power Supply                      | Model: KPS3010D              | S/N: N/A                                         |

**Table 2-5. Test Support Equipment List**

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 7 of 176                     |

V 10.5 12/15/2021

## 2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013 and KDB 789033 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4 and 7.5 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configurations were investigated and EUT powered by AC/DC adaptor was the worst case.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

## 2.6 Software and Firmware

The test was conducted with firmware version 21E8197 installed on the EUT.

## 2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

|                                                  |                                                                                                                                   |                                   |                                          |
|--------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA2837<br><b>IC:</b> 579C-A2837 |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                                   | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2311270068-20.BCG   | <b>Test Dates:</b><br>11/28/2023 - 3/20/2024                                                                                      | <b>EUT Type:</b><br>Tablet Device | Page 8 of 176                            |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

### 3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.8. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 9 of 176                     |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

### 3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

### 3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 10 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 4.0 ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

### Conclusion:

The EUT complies with the requirement of §15.203.

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 11 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution                        | Expanded Uncertainty ( $\pm$ dB) |
|-------------------------------------|----------------------------------|
| Conducted Bench Top Measurements    | 2.07                             |
| Line Conducted Disturbance          | 1.91                             |
| Radiated Disturbance (<30MHz)       | 4.12                             |
| Radiated Disturbance (30MHz - 1GHz) | 4.85                             |
| Radiated Disturbance (1 - 18GHz)    | 5.08                             |
| Radiated Disturbance (>18GHz)       | 4.59                             |

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 12 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance with the requirements of ANSI C63.5-2017.

| Manufacturer         | Model     | Description                            | Cal Date  | Cal Interval | Cal Due   | Serial Number |
|----------------------|-----------|----------------------------------------|-----------|--------------|-----------|---------------|
| Agilent Technologies | N9030A    | 3Hz-44GHz PXA Signal Analyzer          | 6/21/2023 | Annual       | 6/21/2024 | MY49430244    |
| Anritsu              | ML2496A   | Power Meter                            | 4/4/2023  | Annual       | 4/4/2024  | 1840005       |
| Anritsu              | MA2411B   | Pulse Power Sensor                     | 8/22/2023 | Annual       | 8/22/2024 | 1726262       |
| Anritsu              | MA2411B   | Pulse Power Sensor                     | 4/5/2023  | Annual       | 4/5/2024  | 1726261       |
| ETS-Lindgren         | 3117      | Double Ridged Guide Antenna (1-18 GHz) | 3/30/2023 | Annual       | 3/30/2024 | 00218555      |
| Keysight Technology  | N9040B    | UXA Signal Analyzer                    | 3/10/2023 | Annual       | 3/10/2024 | MY57212015    |
| Rohde & Schwarz      | TS-PR18   | Pre-Amplifier (1GHz - 18GHz)           | 8/31/2023 | Annual       | 8/31/2024 | 100052        |
| Rohde & Schwarz      | FSV40     | Signal Analyzer (10Hz-40GHz)           | 5/11/2023 | Annual       | 5/11/2024 | 101619        |
| Rohde & Schwarz      | ESW44     | EMI Test Receiver                      | 6/6/2023  | Annual       | 6/6/2024  | 101668        |
| Rohde & Schwarz      | TS-PR8    | Pre-Amplifier (30MHz - 8GHz)           | 6/22/2023 | Annual       | 6/22/2024 | 102356        |
| Rohde & Schwarz      | TS-PR1840 | Pre-Amplifier (18GHz - 40GHz)          | 6/2/2023  | Annual       | 6/2/2024  | 100050        |
| Rohde & Schwarz      | HFH2-ZZ   | Loop Antenna                           | 5/1/2023  | Annual       | 5/1/2024  | 100519        |
| Rohde & Schwarz      | ENV216    | Two-Line V-Network                     | 6/8/2023  | Annual       | 6/8/2024  | 192052        |
| Schwarzbeck          | VULB 9162 | Bilog Antenna (30MHz - 6GHz)           | 4/17/2023 | Annual       | 4/17/2024 | 00304         |

**Table 6-1. Test Equipment List**

### Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 13 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Apple Inc.

FCC ID: BCGA2837

FCC Classification: Unlicensed National Information Infrastructure (UNII)

IC: 579C-A2837

| FCC Part Section(s)      | RSS Section(s) | Test Description                                                              | Test Limit                                                                                     | Test Condition    | Test Result | Reference        |
|--------------------------|----------------|-------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|-------------------|-------------|------------------|
| 15.407                   | RSS-Gen [6.7]  | 26dB Bandwidth                                                                | N/A                                                                                            | CONDUCTED         | N/A         | Section 7.2      |
| 15.407(e)                | RSS-Gen [6.7]  | 6dB Bandwidth                                                                 | >500kHz(5725-5850MHz)                                                                          |                   | PASS        | Section 7.3      |
| 2.1049                   | RSS-Gen [6.7]  | Occupied Bandwidth                                                            | N/A                                                                                            |                   | N/A         | Section 7.2, 7.3 |
| 15.407 (a.1.iv), (a.3)   | RSS-247 [6.2]  | Maximum Conducted Output Power                                                | Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])           |                   | PASS        | Section 7.4      |
| 15.407 (a.1.iv), (a.3)   | RSS-247 [6.2]  | Maximum Power Spectral Density                                                | Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])     |                   | PASS        | Section 7.5      |
| 15.407(b.1), (4)         | RSS-247 [6.2]  | Undesirable Emissions                                                         | Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2])               | RADIATED          | PASS        | Section 7.6      |
| 15.205, 15.407(b.1), (4) | RSS-Gen [8.9]  | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9]) |                   | PASS        | Section 7.6, 7.7 |
| 15.207                   | RSS-Gen [8.8]  | AC Conducted Emissions 150kHz – 30MHz                                         | < FCC 15.207 (RSS-Gen [8.8]) limits                                                            | AC LINE CONDUCTED | PASS        | Section 7.8      |

**Table 7-1. Summary of Test Results**

#### Notes:

- All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “UNII Automation,” Version 7.0.
- For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Chamber Automation,” Version 3.0.

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 14 of 176                    |

V 10.5 12/15/2021

## 7.2 26dB & 99% Bandwidth Measurement – HDR

§2.1049; §15.407; RSS-Gen [6.7]

### Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

***The 26dB bandwidth is used to determine the conducted power limits.***

### Test Procedure Used

ANSI C63.10-2013 – Subclause 12.4

KDB 789033 D02 v02r01 – Section C

### Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 26$ . The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3.  $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes

All antenna configurations and power schemes were investigated and only the worst case is reported.


|                                         |                                                                                                                                   |                            |                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                             | EUT Type:<br>Tablet Device | Page 15 of 176                    |

V 10.5 12/15/2021

## 7.2.1 Antenna 5b 26dB & 99% Bandwidth Measurements

|        | Frequency [MHz] | Data Rate [Mbps] | Mode | Power Scheme | Measured 99% Occupied Bandwidth [MHz] | Measured 26dB Bandwidth [MHz] |
|--------|-----------------|------------------|------|--------------|---------------------------------------|-------------------------------|
| Band 1 | 5162            | 4.0              | HDR4 | ePA          | 2.3347                                | 2.7860                        |
|        | 5204            | 4.0              | HDR4 | ePA          | 2.3310                                | 2.7850                        |
|        | 5245            | 4.0              | HDR4 | ePA          | 2.3359                                | 2.7861                        |
|        | 5162            | 8.0              | HDR8 | ePA          | 4.8494                                | 5.6864                        |
|        | 5204            | 8.0              | HDR8 | ePA          | 4.8508                                | 5.6583                        |
|        | 5245            | 8.0              | HDR8 | ePA          | 4.8543                                | 5.6702                        |


Table 7-2. Conducted BW Measurements Antenna 5b

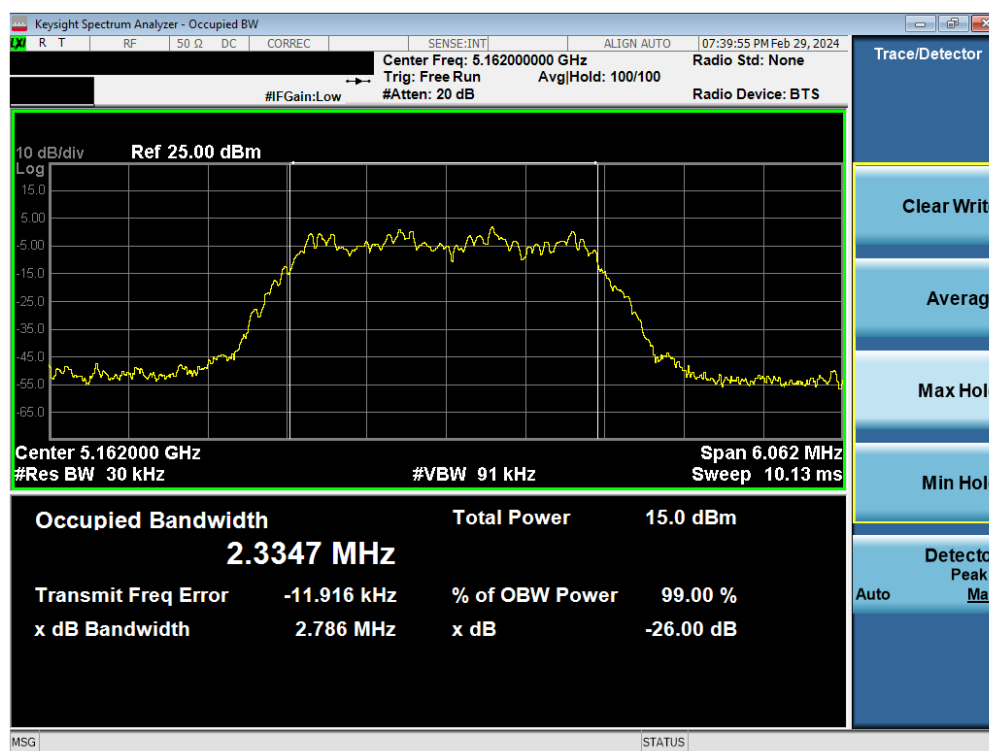


Plot 7-1. 26dB BW & 99% OBW Antenna 5b (HDR4, ePA– 5162MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 16 of 176                    |

V 10.5 12/15/2021

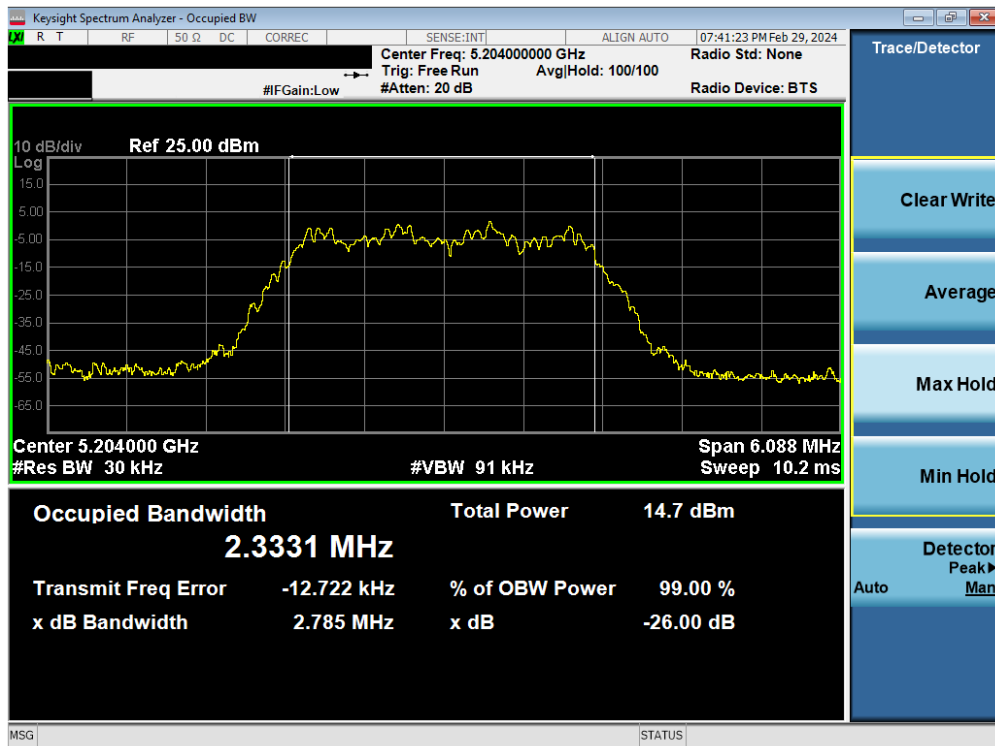

Plot 7-2. 26dB BW & 99% OBW Antenna 5b (HDR4, ePA– 5204MHz)

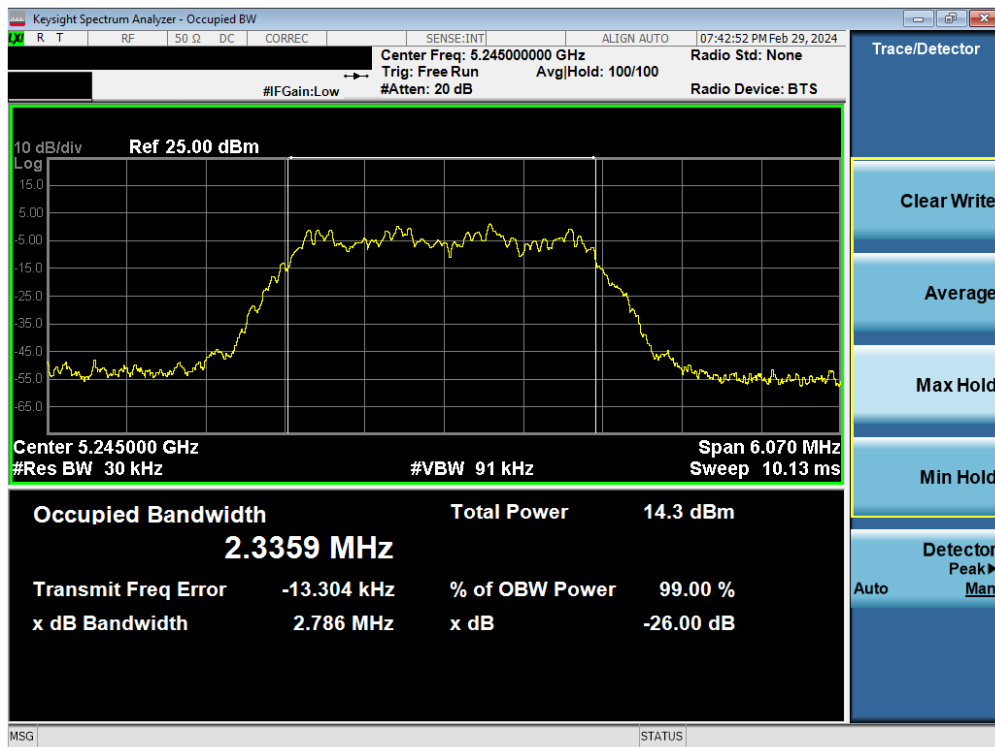


Plot 7-3. 26dB BW & 99% OBW Antenna 5b (HDR4, ePA – 5245MHz)


|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 17 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

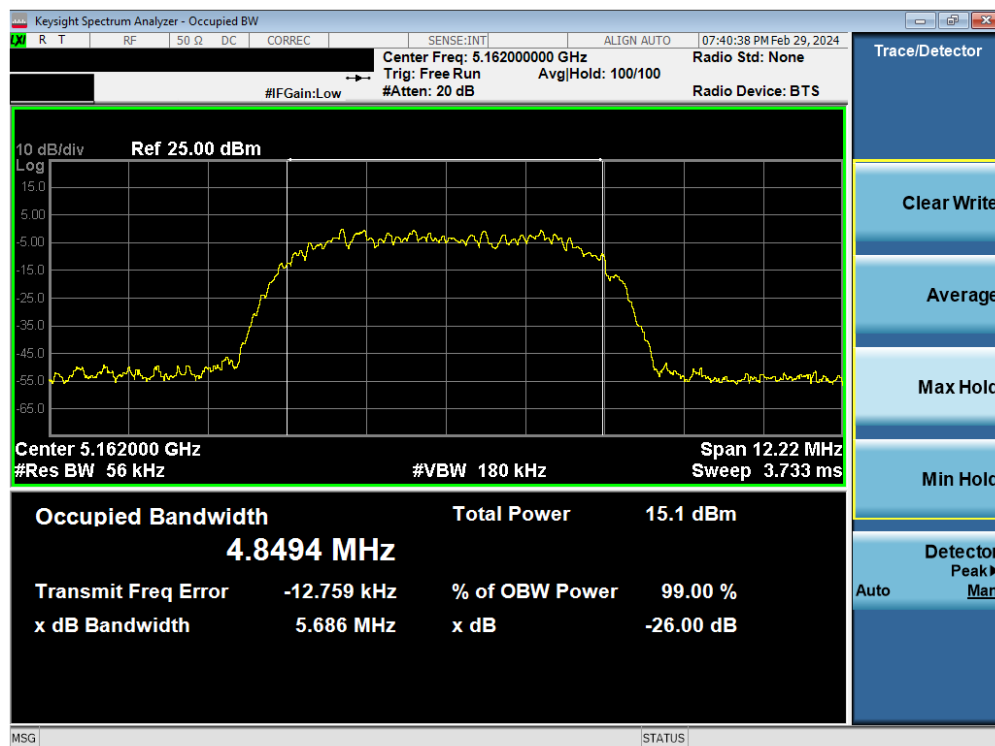


Plot 7-4. 26dB BW & 99% OBW Antenna 5b (HDR8, ePA- 5162MHz)

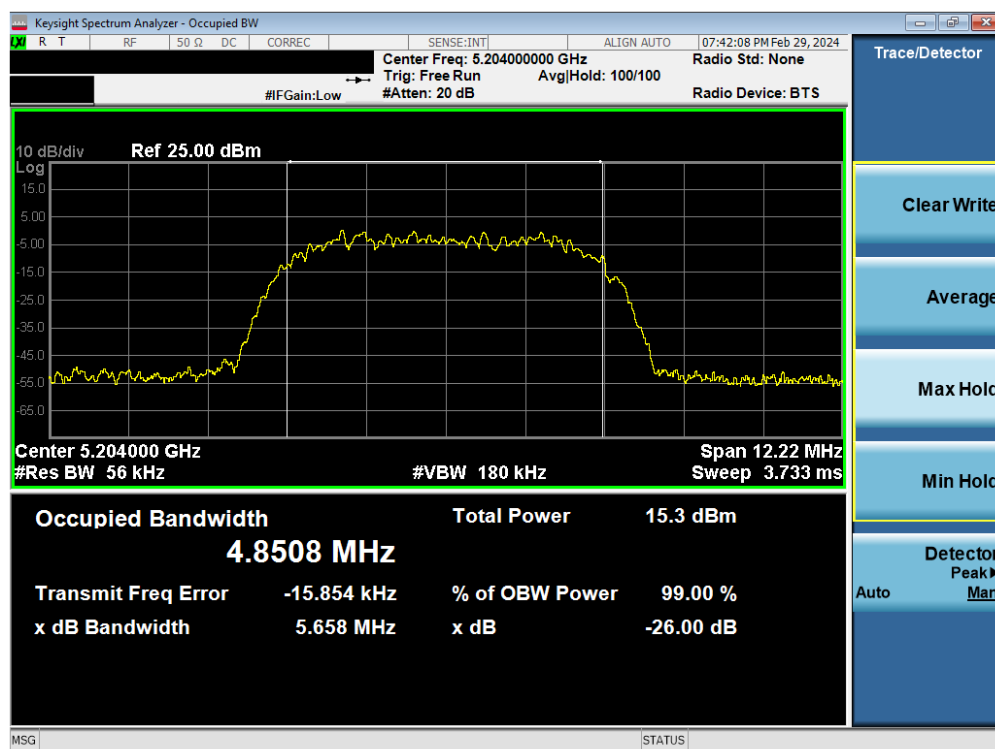

Plot 7-5. 26dB BW & 99% OBW Antenna 5b (HDR8, ePA- 5204MHz)

|                                         |                                                                                                                                  |                            |                                   |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                            | EUT Type:<br>Tablet Device | Page 18 of 176                    |

V 10.5 12/15/2021

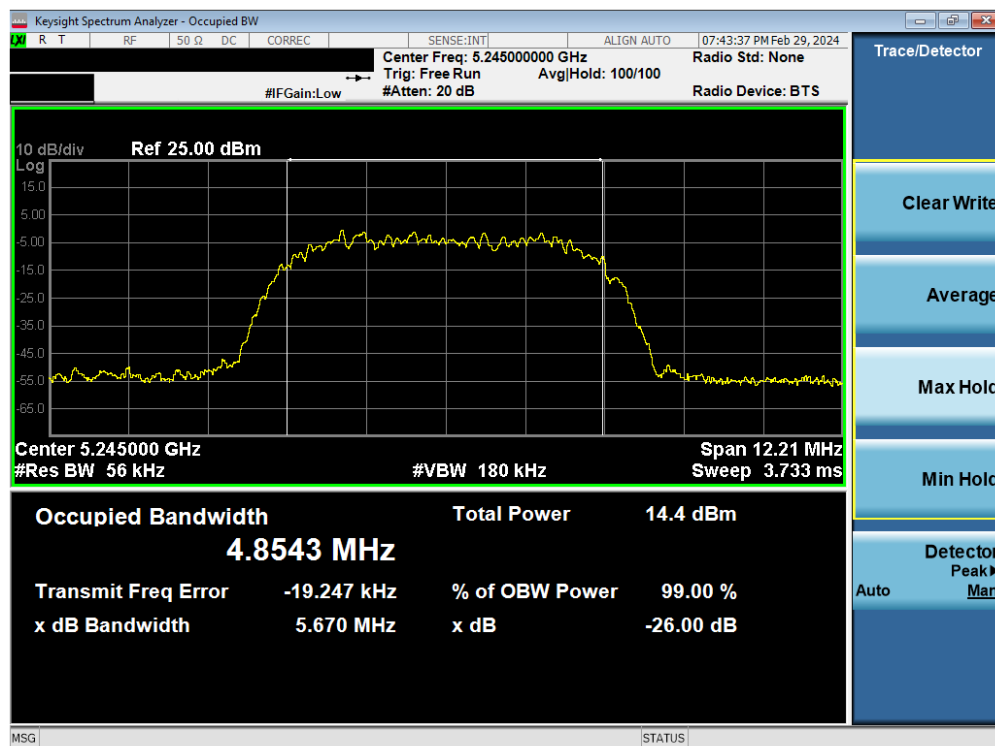

Plot 7-6. 26dB BW & 99% OBW Antenna 5b (HDR8, ePA – 5245MHz)


|                                         |                                                                                                                                   |                            |                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                             | EUT Type:<br>Tablet Device | Page 19 of 176                    |

V 10.5 12/15/2021

## 7.2.2 Antenna 4a 26dB & 99% Bandwidth Measurements

|        | Frequency [MHz] | Data Rate [Mbps] | Mode | Power Scheme | Measured 99% Occupied Bandwidth [MHz] | Measured 26dB Bandwidth [MHz] |
|--------|-----------------|------------------|------|--------------|---------------------------------------|-------------------------------|
| Band 1 | 5162            | 4.0              | HDR4 | ePA          | 2.3340                                | 2.7863                        |
|        | 5204            | 4.0              | HDR4 | ePA          | 2.3333                                | 2.7857                        |
|        | 5245            | 4.0              | HDR4 | ePA          | 2.3359                                | 2.7788                        |
|        | 5162            | 8.0              | HDR8 | ePA          | 4.8483                                | 5.6926                        |
|        | 5204            | 8.0              | HDR8 | ePA          | 4.8487                                | 5.7015                        |
|        | 5245            | 8.0              | HDR8 | ePA          | 4.8509                                | 5.6667                        |


Table 7-3. Conducted BW Measurements Antenna 4a

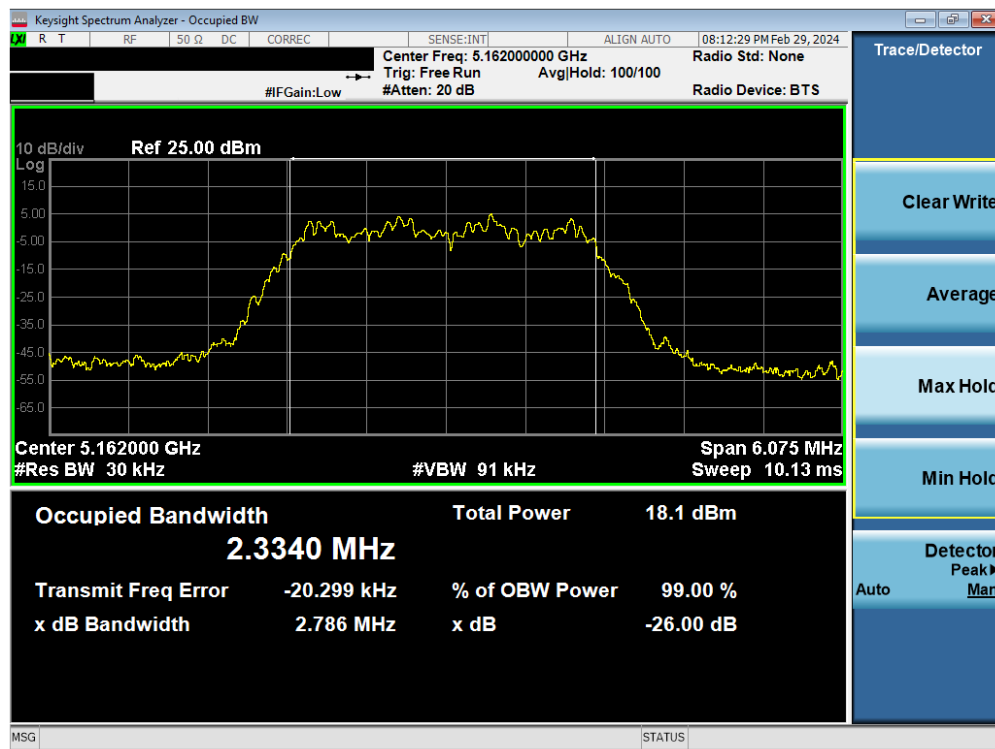


Plot 7-7. 26dB BW & 99% OBW Antenna 4a (HDR4, ePA– 5162MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 20 of 176                    |

V 10.5 12/15/2021

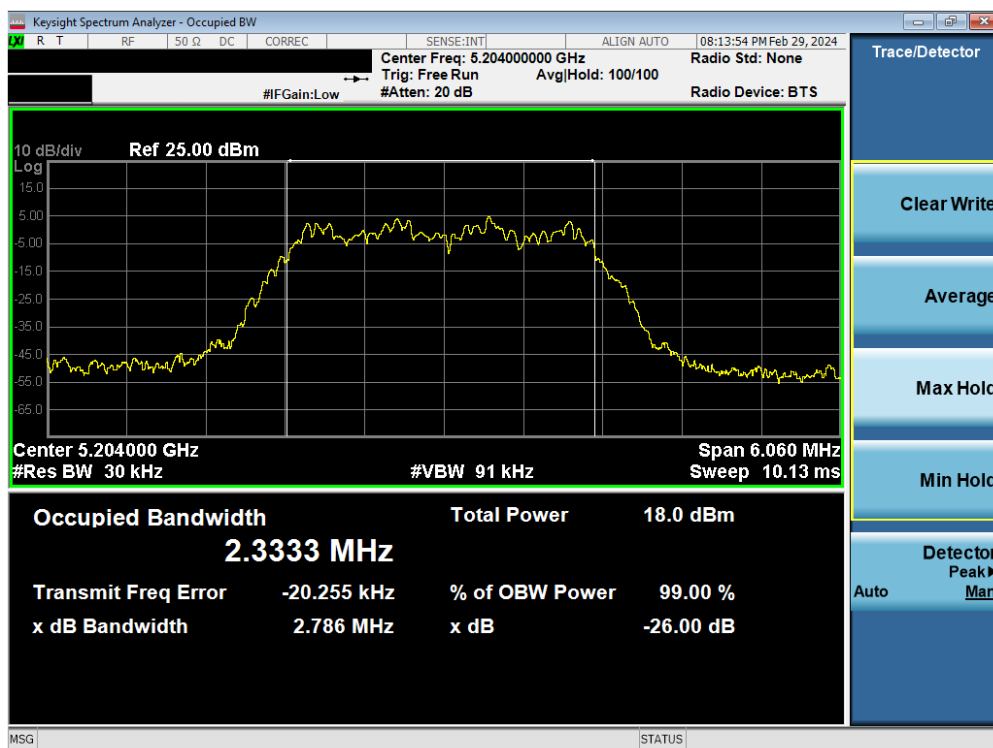


Plot 7-8. 26dB BW & 99% OBW Antenna 4a (HDR4, ePA- 5204MHz)

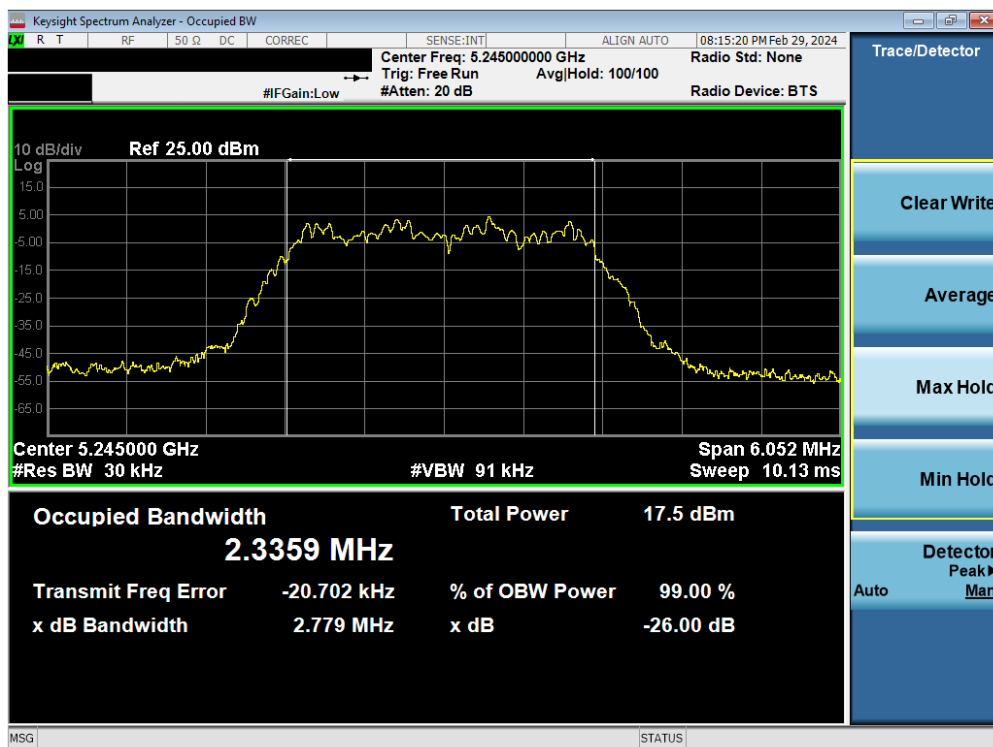


Plot 7-9. 26dB BW & 99% OBW Antenna 4a (HDR4, ePA- 5245MHz)

|                                         |                                                                                                                                   |                            |                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                             | EUT Type:<br>Tablet Device | Page 21 of 176                    |

V 10.5 12/15/2021

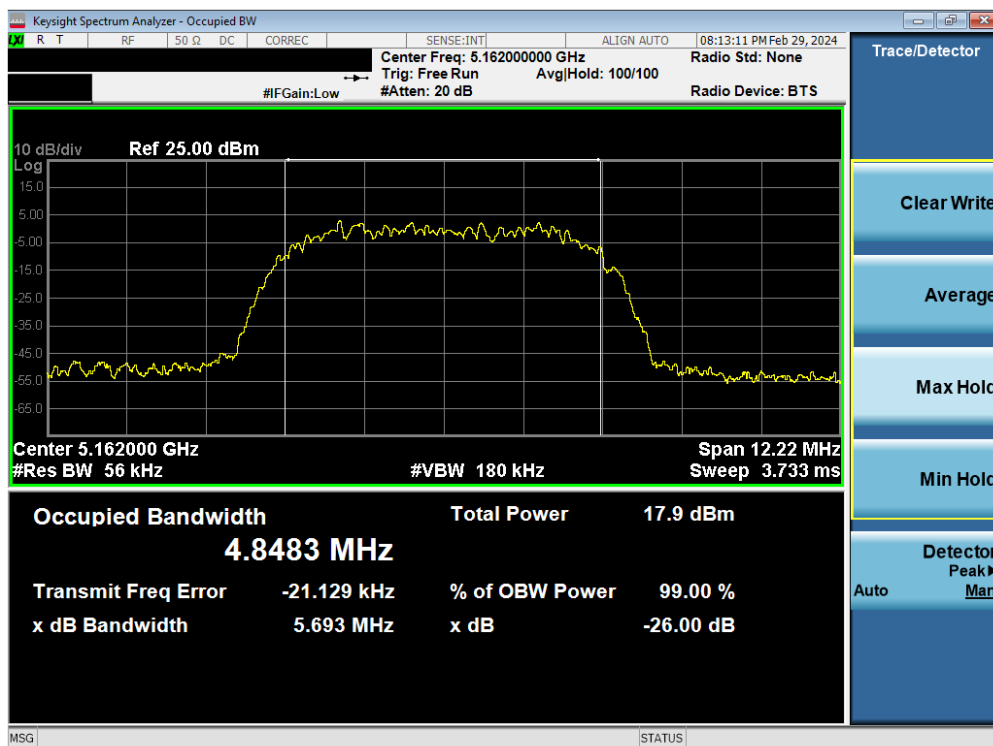

Plot 7-10. 26dB BW & 99% OBW Antenna 4a (HDR8, ePA- 5162MHz)

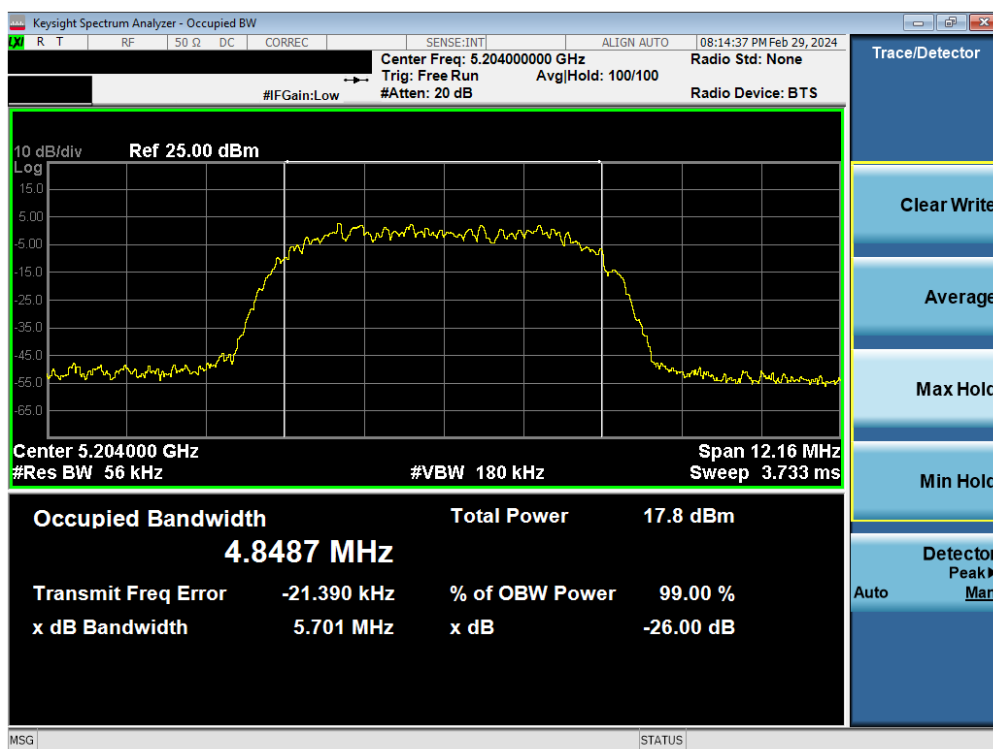


Plot 7-11. 26dB BW & 99% OBW Antenna 4a (HDR8, ePA- 5204MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 22 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

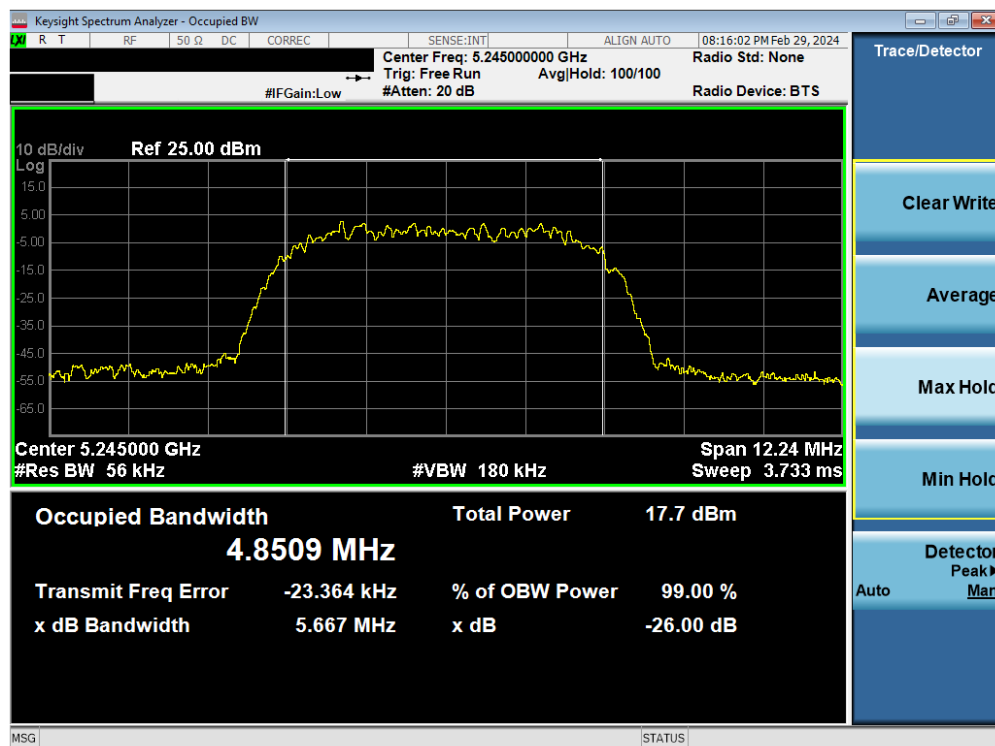

Plot 7-12. 26dB BW & 99% OBW Antenna 4a (HDR8, ePA– 5245MHz)


|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 23 of 176                    |

V 10.5 12/15/2021

## 7.2.3 Antenna 2a 26dB & 99% Bandwidth Measurements

|        | Frequency [MHz] | Data Rate [Mbps] | Mode | Power Scheme | Measured 99% Occupied Bandwidth [MHz] | Measured 26dB Bandwidth [MHz] |
|--------|-----------------|------------------|------|--------------|---------------------------------------|-------------------------------|
| Band 1 | 5162            | 4.0              | HDR4 | ePA          | 2.3348                                | 2.7840                        |
|        | 5204            | 4.0              | HDR4 | ePA          | 2.3357                                | 2.7849                        |
|        | 5245            | 4.0              | HDR4 | ePA          | 2.3367                                | 2.7827                        |
|        | 5162            | 8.0              | HDR8 | ePA          | 4.8504                                | 5.7031                        |
|        | 5204            | 8.0              | HDR8 | ePA          | 4.8524                                | 5.6753                        |
|        | 5245            | 8.0              | HDR8 | ePA          | 4.8549                                | 5.6840                        |


Table 7-4. Conducted BW Measurements Antenna 2a

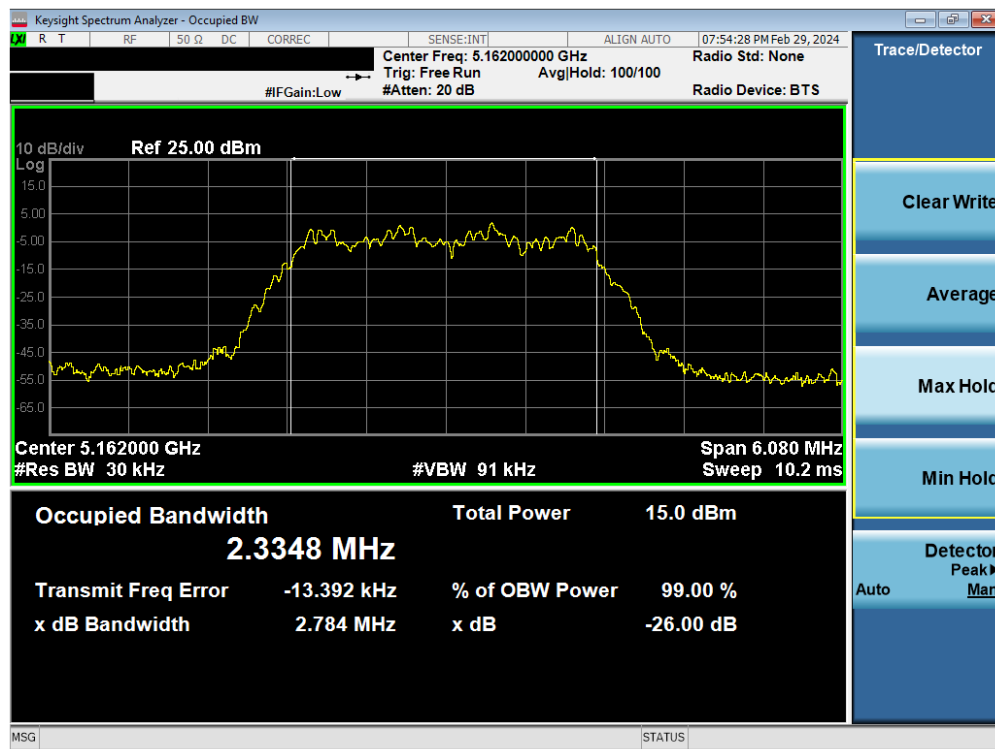


Plot 7-13. 26dB BW & 99% OBW Antenna 2a (HDR4, ePA– 5162MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 24 of 176                    |

V 10.5 12/15/2021

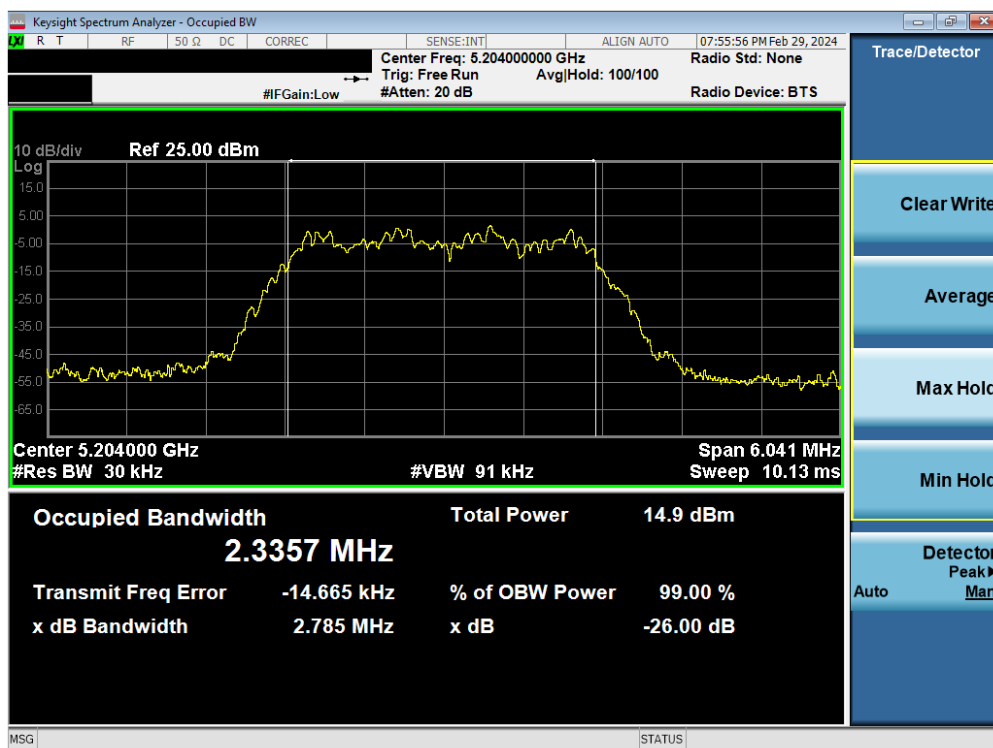


Plot 7-14. 26dB BW & 99% OBW Antenna 2a (HDR4, ePA– 5204MHz)

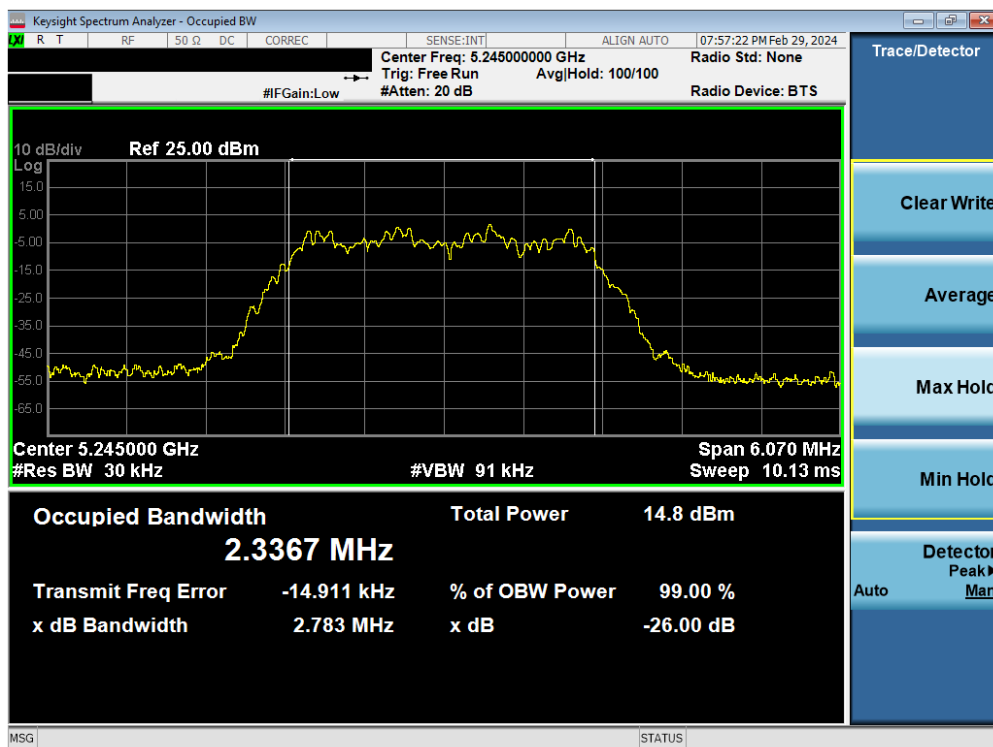


Plot 7-15. 26dB BW & 99% OBW Antenna 2a (HDR4, ePA– 5245MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 25 of 176                    |

V 10.5 12/15/2021

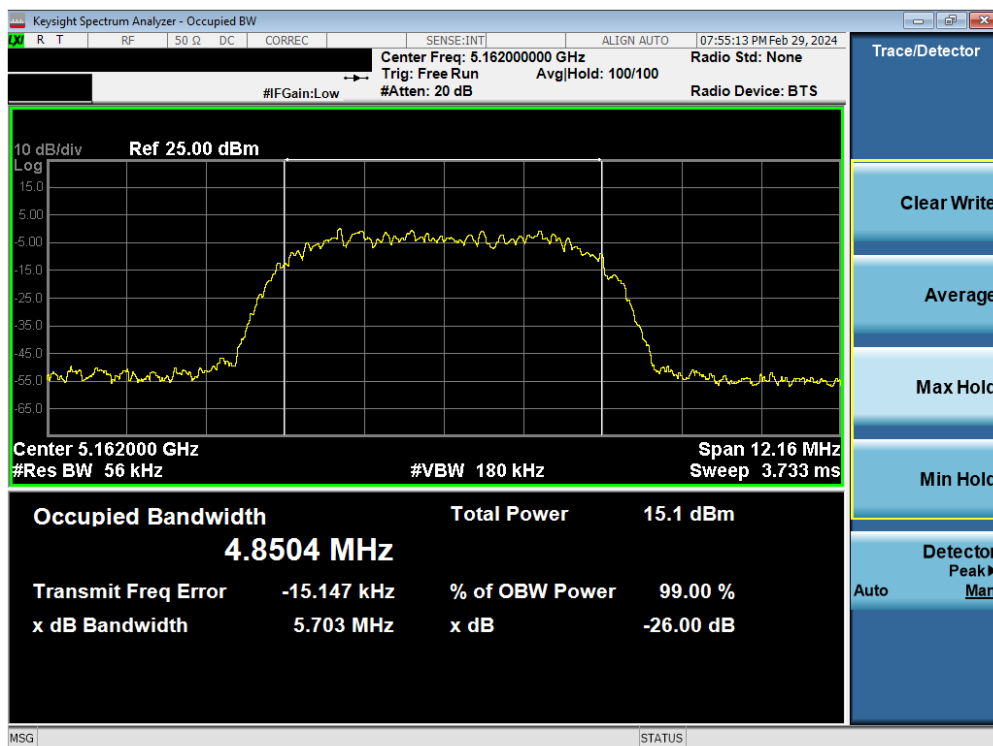

Plot 7-16. 26dB BW & 99% OBW Antenna 2a (HDR8, ePA- 5162MHz)

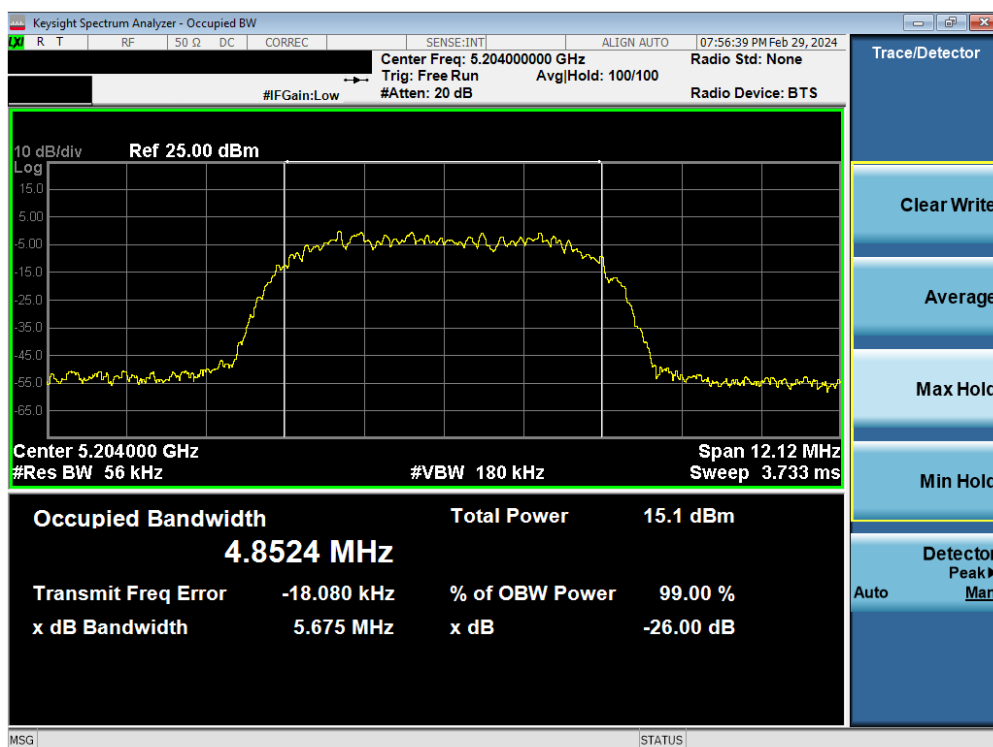


Plot 7-17. 26dB BW & 99% OBW Antenna 2a (HDR8, ePA- 5204MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 26 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

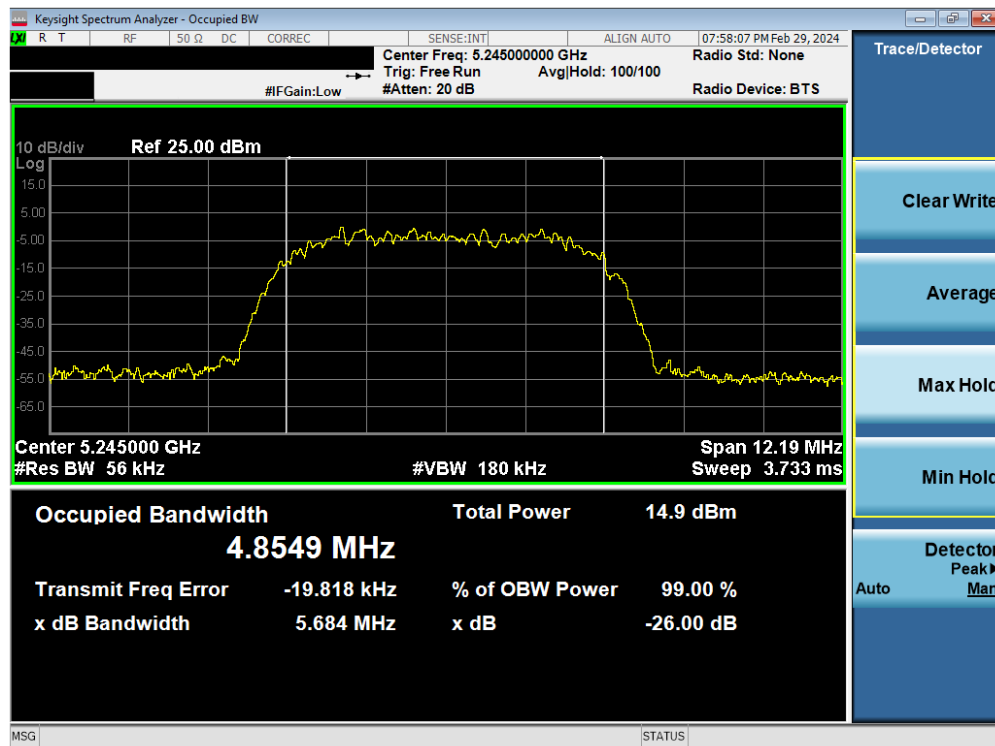

Plot 7-18. 26dB BW & 99% OBW Antenna 2a (HDR8, ePA– 5245MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 27 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

### 7.3 6dB & 99% Bandwidth Measurement – HDR

§2.1049; §15.407 (e); RSS-Gen [6.7]

#### Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

***In the 5.725 – 5.850GHz band, the 6dB bandwidth must be  $\geq 500$  kHz.***

#### Test Procedure Used

ANSI C63.10-2013 – Subclause 6.9.2  
KDB 789033 D02 v02r01 – Section C

#### Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 6$ . The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-2. Test Instrument & Measurement Setup**

#### Test Notes

All antenna configurations and power schemes were investigated and only the worst case is reported.


|                                         |                                                                                                                                   |                            |                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                             | EUT Type:<br>Tablet Device | Page 28 of 176                    |

V 10.5 12/15/2021

### 7.3.1 Antenna 5b 6dB & 99% Bandwidth Measurements


|        | Frequency [MHz] | Data Rate [Mbps] | Mode | Power Scheme | Measured 99% Occupied Bandwidth [MHz] | Measured 6dB Bandwidth [MHz] | Minimum 6dB Bandwidth [MHz] | Pass / Fail |
|--------|-----------------|------------------|------|--------------|---------------------------------------|------------------------------|-----------------------------|-------------|
| Band 3 | 5733            | 4.0              | HDR4 | ePA          | 2.3654                                | 2.1554                       | 0.50                        | Pass        |
|        | 5789            | 4.0              | HDR4 | ePA          | 2.3655                                | 2.1574                       | 0.50                        | Pass        |
|        | 5844            | 4.0              | HDR4 | ePA          | 2.3650                                | 2.1543                       | 0.50                        | Pass        |
|        | 5733            | 8.0              | HDR8 | ePA          | 4.8538                                | 4.1782                       | 0.50                        | Pass        |
|        | 5789            | 8.0              | HDR8 | ePA          | 4.8499                                | 4.1758                       | 0.50                        | Pass        |
|        | 5844            | 8.0              | HDR8 | ePA          | 4.8575                                | 4.1789                       | 0.50                        | Pass        |

Table 7-5. Conducted BW Measurements Antenna 5b

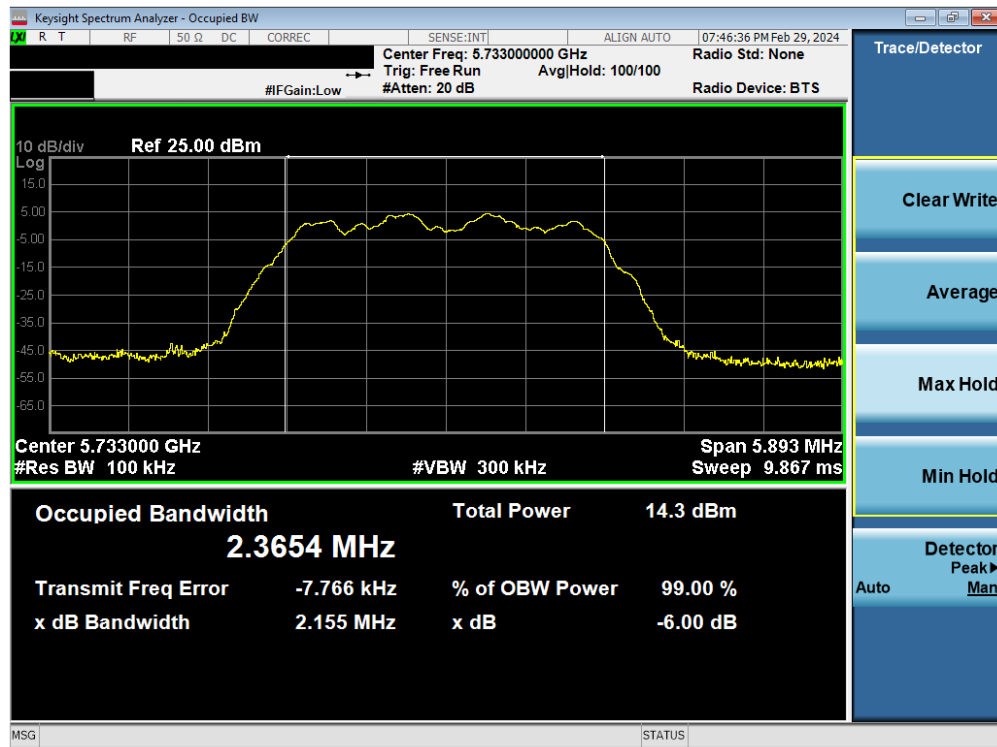


Plot 7-19. 6dB BW & 99% OBW Antenna 5b (HDR4, ePA, 5733MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 29 of 176                    |

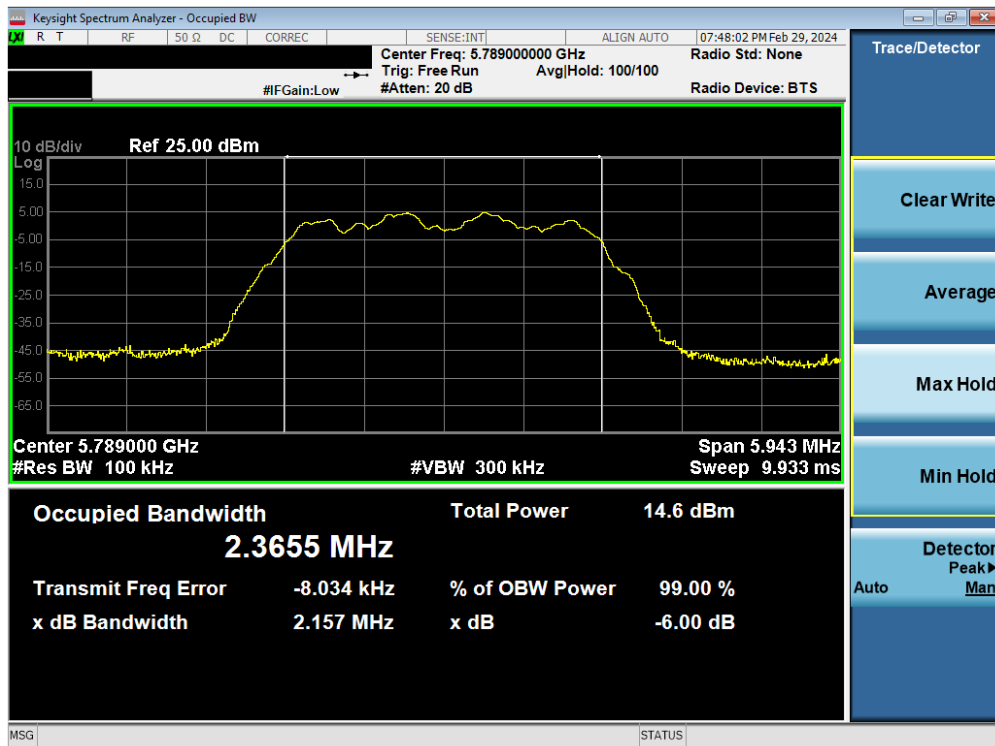

Plot 7-20. 6dB BW & 99% OBW Antenna 5b (HDR4, ePA, 5789MHz)

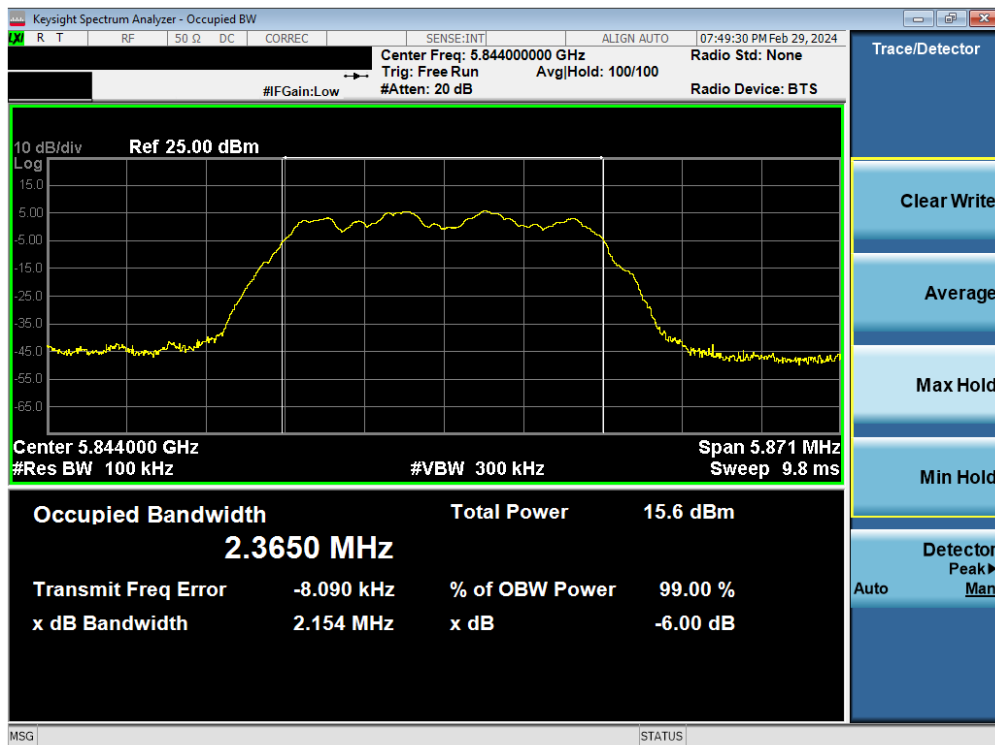


Plot 7-21. 6dB BW & 99% OBW Antenna 5b (HDR4, ePA, 5844MHz)


|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 30 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

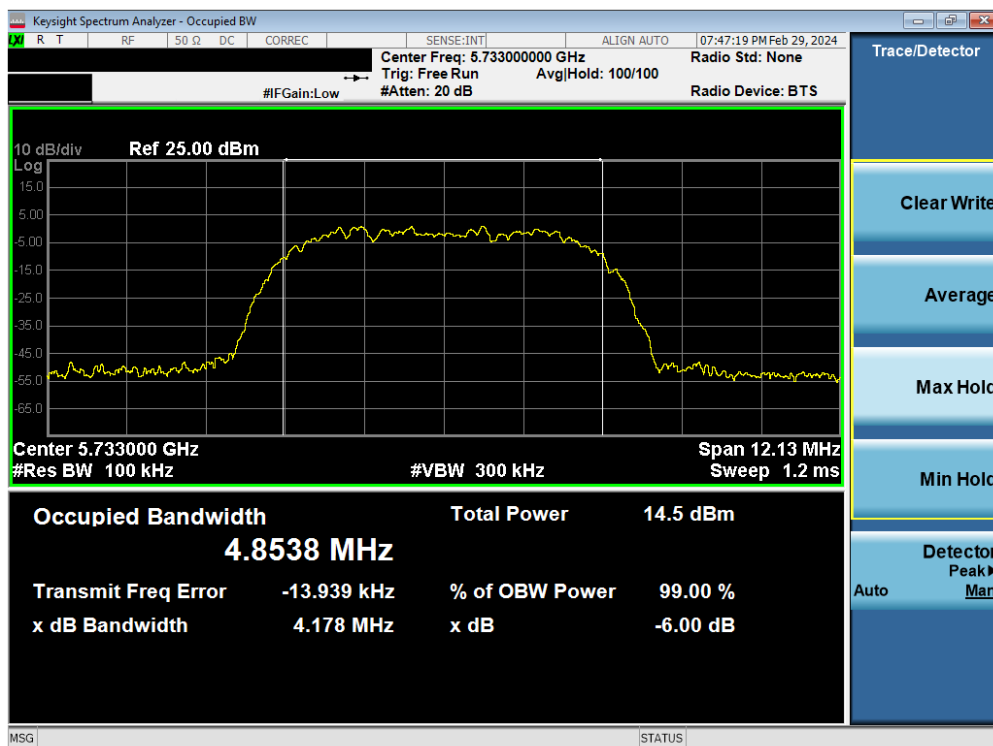


Plot 7-22. 6dB BW & 99% OBW Antenna 5b (HDR8, ePA, 5733MHz)

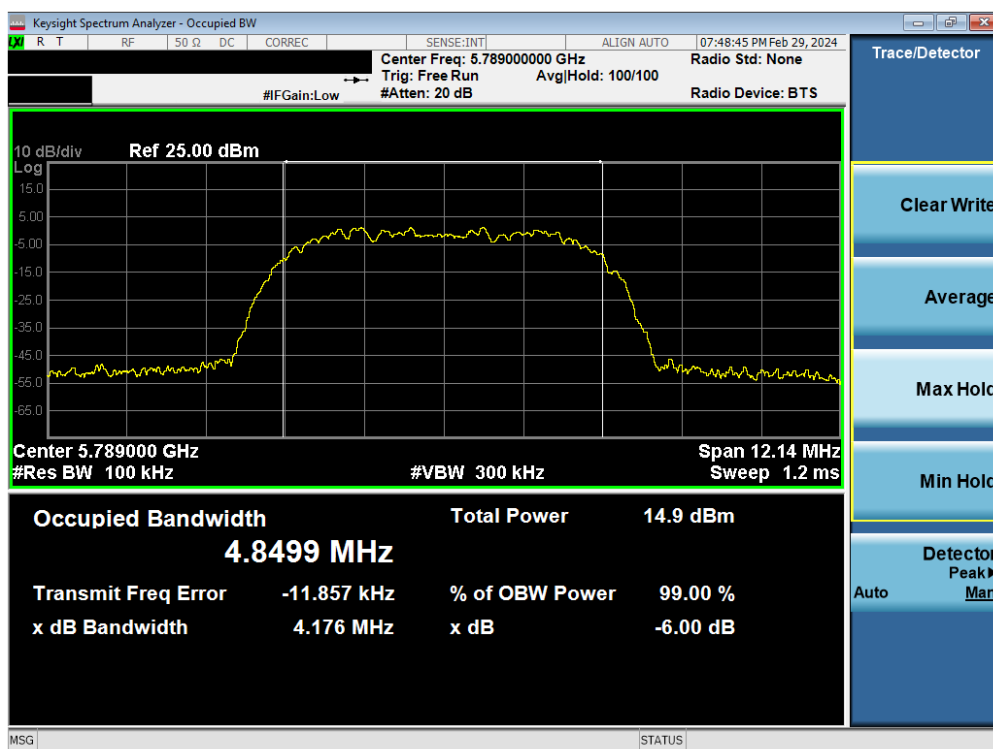

Plot 7-23. 6dB BW & 99% OBW Antenna 5b (HDR8, ePA, 5789MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 31 of 176                    |

V 10.5 12/15/2021

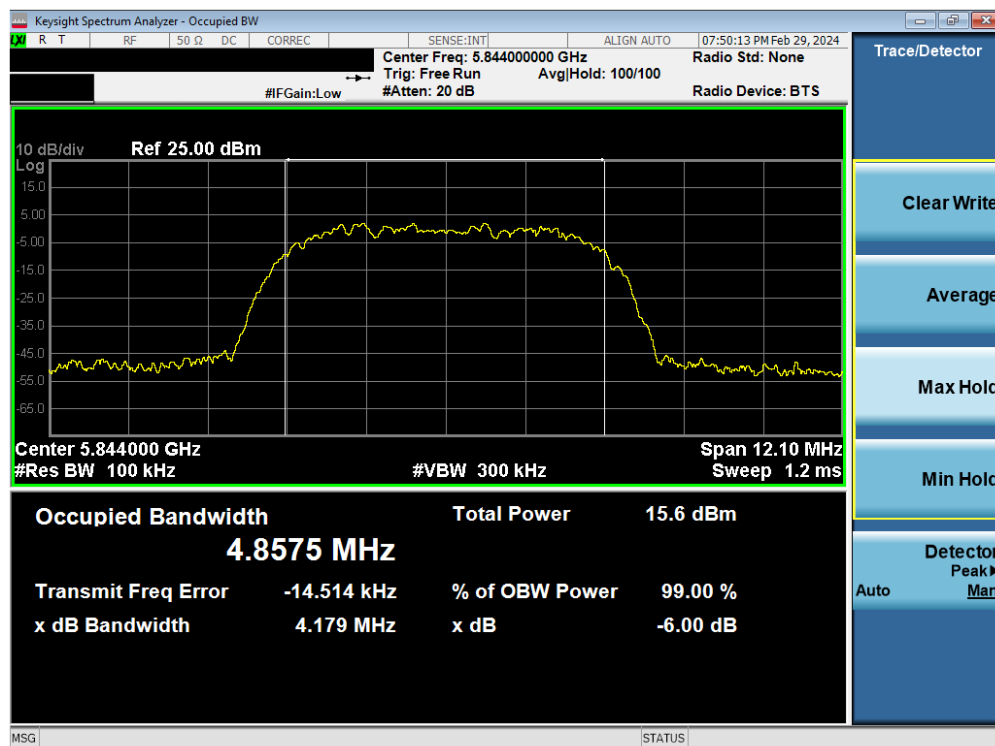

Plot 7-24. 6dB BW & 99% OBW Antenna 5b (HDR8, ePA, 5844MHz)


|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 32 of 176                    |

V 10.5 12/15/2021

### 7.3.2 Antenna 4a 6dB & 99% Bandwidth Measurements

|        | Frequency [MHz] | Data Rate [Mbps] | Mode | Power Scheme | Measured 99% Occupied Bandwidth [MHz] | Measured 6dB Bandwidth [MHz] | Minimum 6dB Bandwidth [MHz] | Pass / Fail |
|--------|-----------------|------------------|------|--------------|---------------------------------------|------------------------------|-----------------------------|-------------|
| Band 3 | 5733            | 4.0              | HDR4 | ePA          | 2.3655                                | 2.1567                       | 0.50                        | Pass        |
|        | 5789            | 4.0              | HDR4 | ePA          | 2.3662                                | 2.1577                       | 0.50                        | Pass        |
|        | 5844            | 4.0              | HDR4 | ePA          | 2.3649                                | 2.1581                       | 0.50                        | Pass        |
|        | 5733            | 8.0              | HDR8 | ePA          | 4.8471                                | 4.1772                       | 0.50                        | Pass        |
|        | 5789            | 8.0              | HDR8 | ePA          | 4.8516                                | 4.1770                       | 0.50                        | Pass        |
|        | 5844            | 8.0              | HDR8 | ePA          | 4.8521                                | 4.1813                       | 0.50                        | Pass        |


Table 7-6. Conducted BW Measurements Antenna 4a

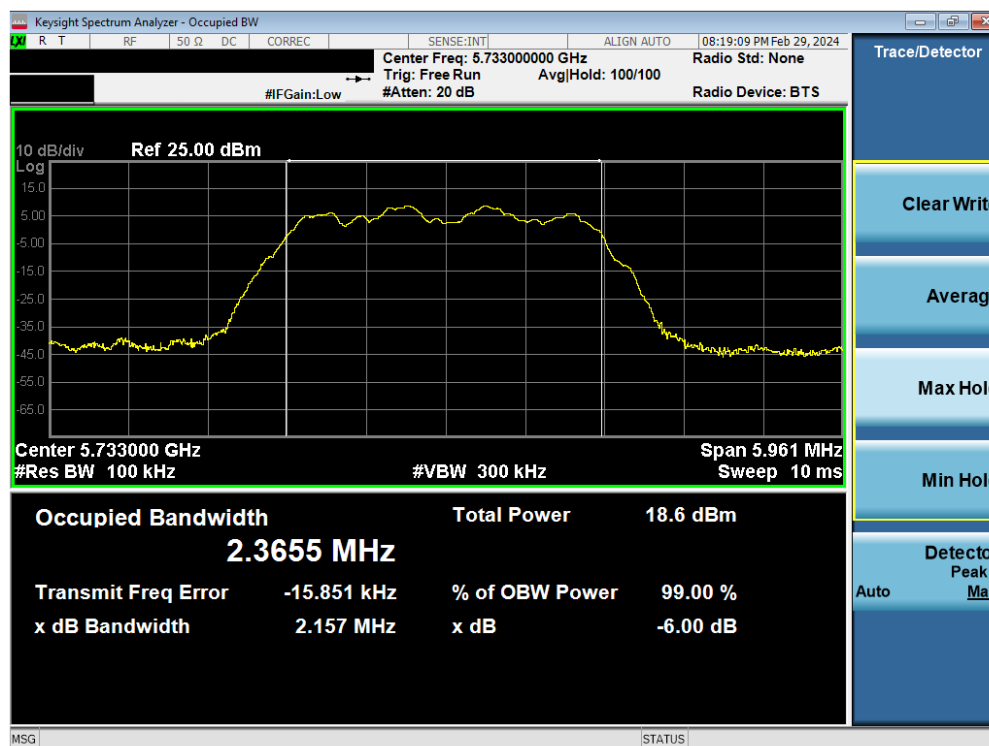


Plot 7-25. 6dB BW & 99% OBW Antenna 4a (HDR4, ePA, 5733MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 33 of 176                    |

V 10.5 12/15/2021

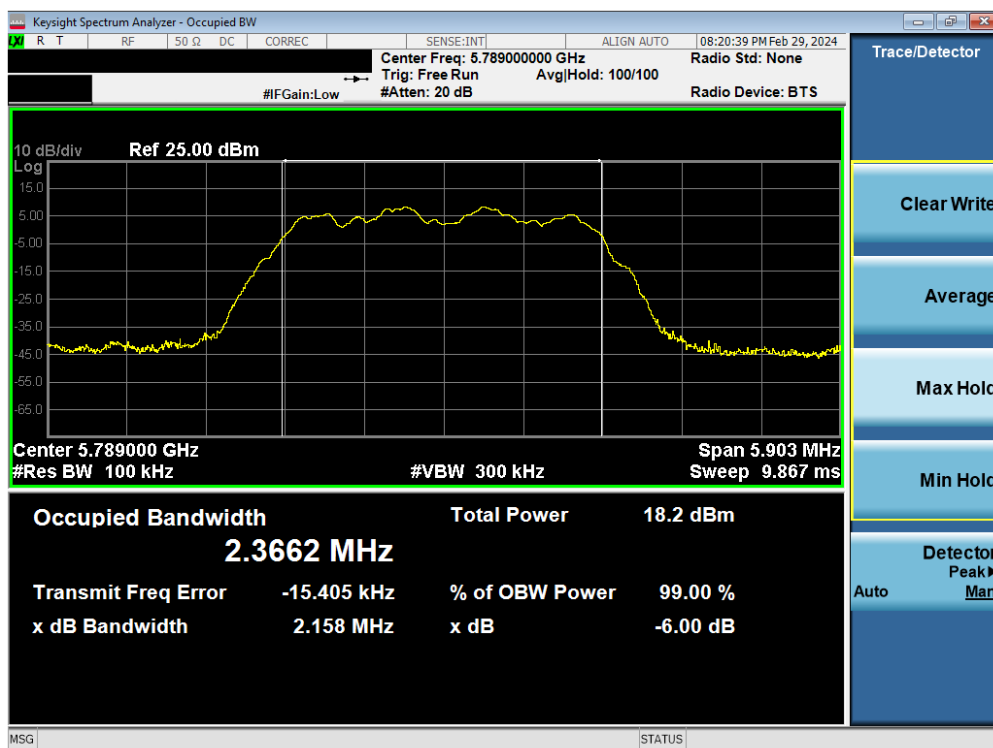

Plot 7-26. 6dB BW & 99% OBW Antenna 4a (HDR4, ePA, 5789MHz)

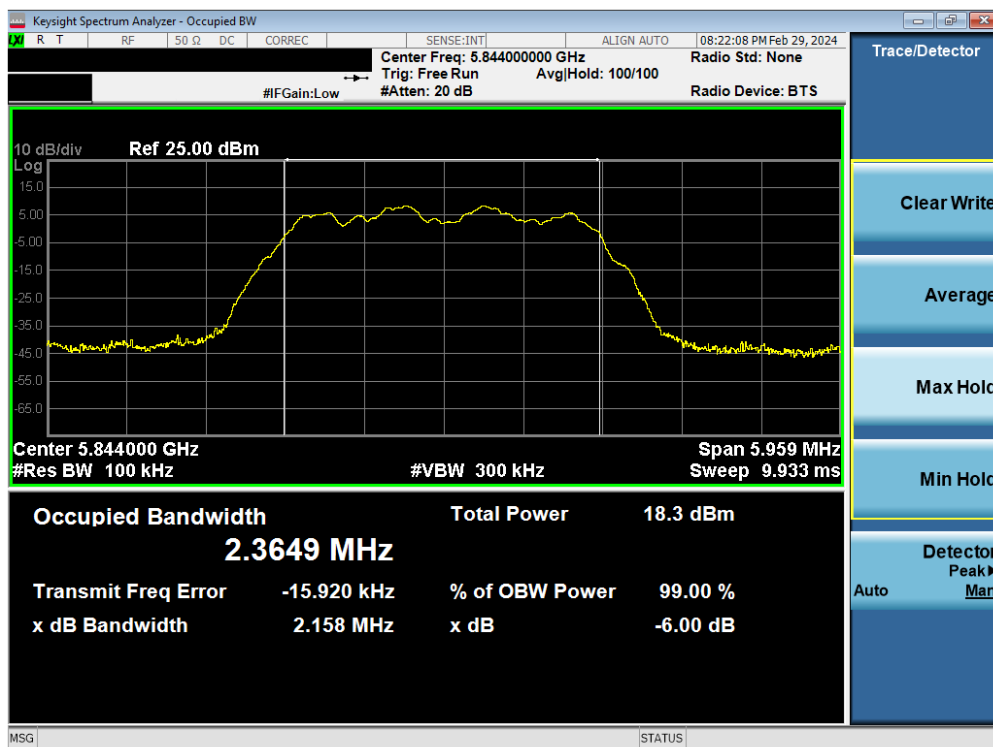


Plot 7-27. 6dB BW & 99% OBW Antenna 4a (HDR4, ePA, 5844MHz)


|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 34 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

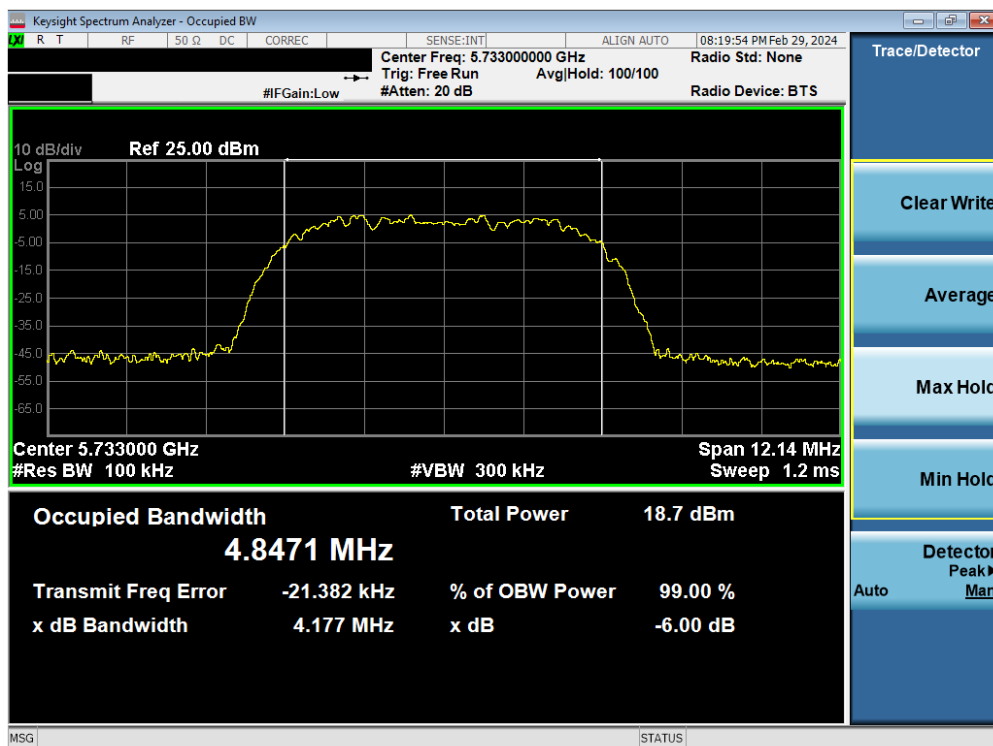


Plot 7-28. 6dB BW & 99% OBW Antenna 4a (HDR8, ePA, 5733MHz)

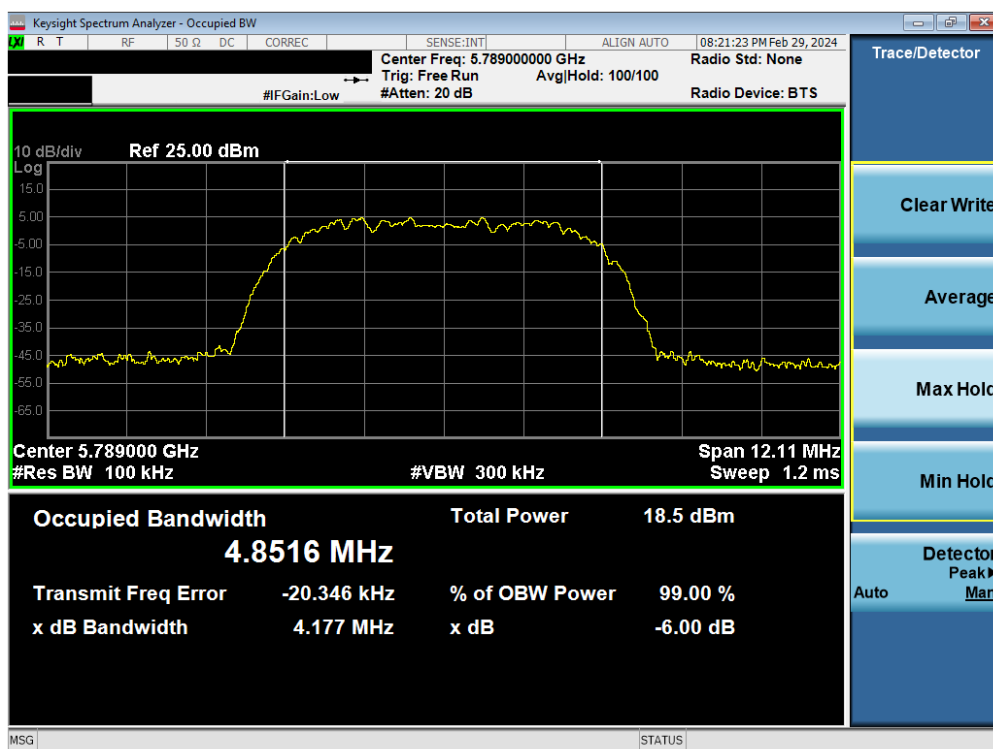

Plot 7-29. 6dB BW & 99% OBW Antenna 4a (HDR8, ePA, 5789MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 35 of 176                    |

V 10.5 12/15/2021

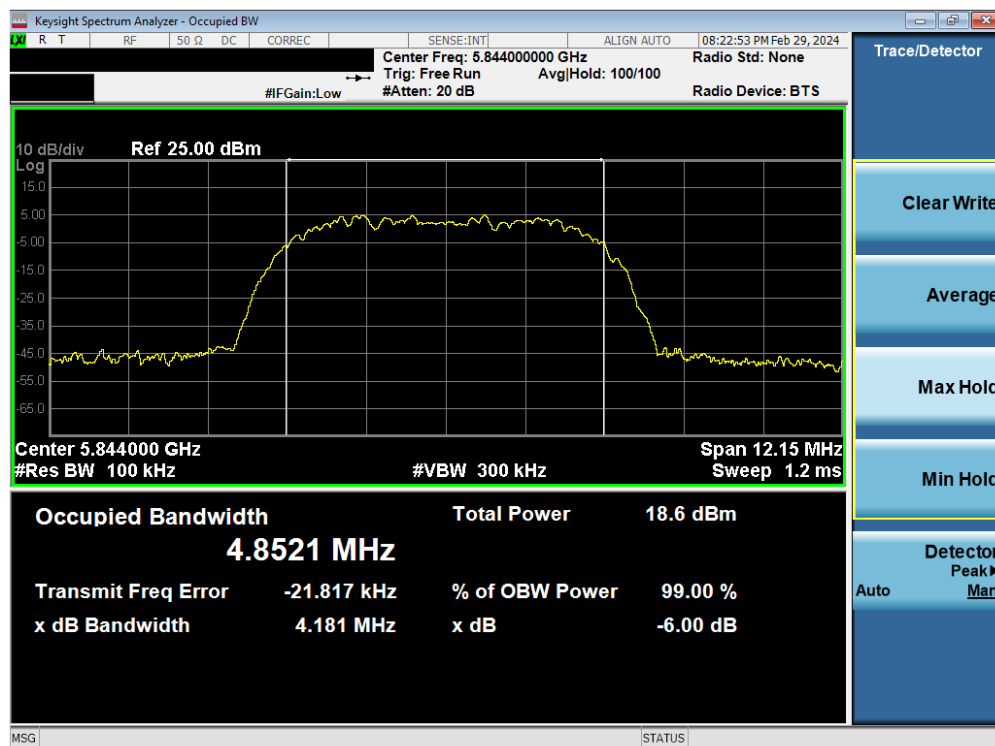

Plot 7-30. 6dB BW & 99% OBW Antenna 4a (HDR8, ePA, 5844MHz)


|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 36 of 176                    |

V 10.5 12/15/2021

### 7.3.3 Antenna 2a 6dB & 99% Bandwidth Measurements


|        | Frequency [MHz] | Data Rate [Mbps] | Mode | Power Scheme | Measured 99% Occupied Bandwidth [MHz] | Measured 6dB Bandwidth [MHz] | Minimum 6dB Bandwidth [MHz] | Pass / Fail |
|--------|-----------------|------------------|------|--------------|---------------------------------------|------------------------------|-----------------------------|-------------|
| Band 3 | 5733            | 4.0              | HDR4 | ePA          | 2.3649                                | 2.1542                       | 0.50                        | Pass        |
|        | 5789            | 4.0              | HDR4 | ePA          | 2.3649                                | 2.1539                       | 0.50                        | Pass        |
|        | 5844            | 4.0              | HDR4 | ePA          | 2.3650                                | 2.1597                       | 0.50                        | Pass        |
|        | 5733            | 8.0              | HDR8 | ePA          | 4.8503                                | 4.1830                       | 0.50                        | Pass        |
|        | 5789            | 8.0              | HDR8 | ePA          | 4.8551                                | 1.4792                       | 0.50                        | Pass        |
|        | 5844            | 8.0              | HDR8 | ePA          | 4.8509                                | 4.1813                       | 0.50                        | Pass        |

Table 7-7. Conducted BW Measurements Antenna 2a

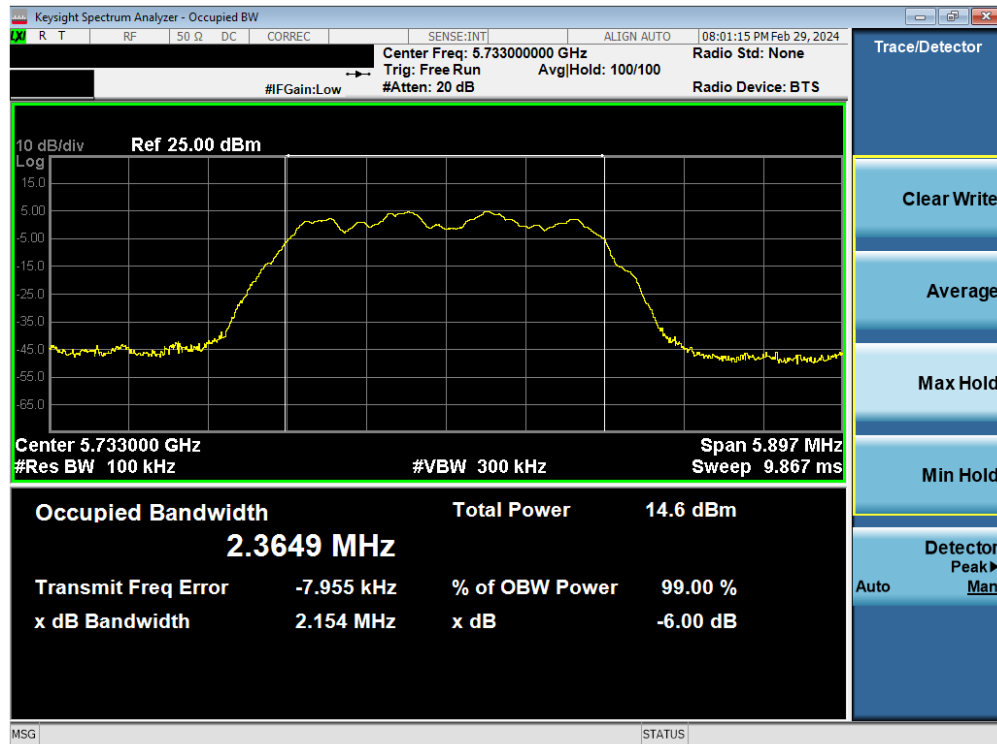


Plot 7-31. 6dB BW & 99% OBW Antenna 2a (HDR4, ePA, 5733MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 37 of 176                    |

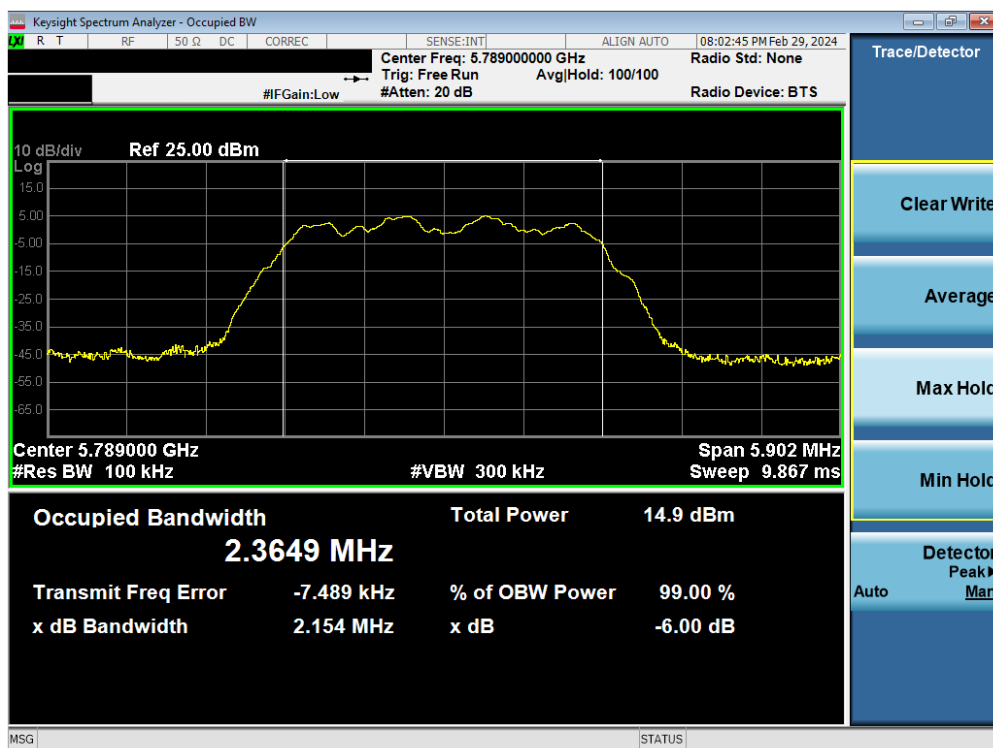


Plot 7-32. 6dB BW & 99% OBW Antenna 2a (HDR4, ePA, 5789MHz)

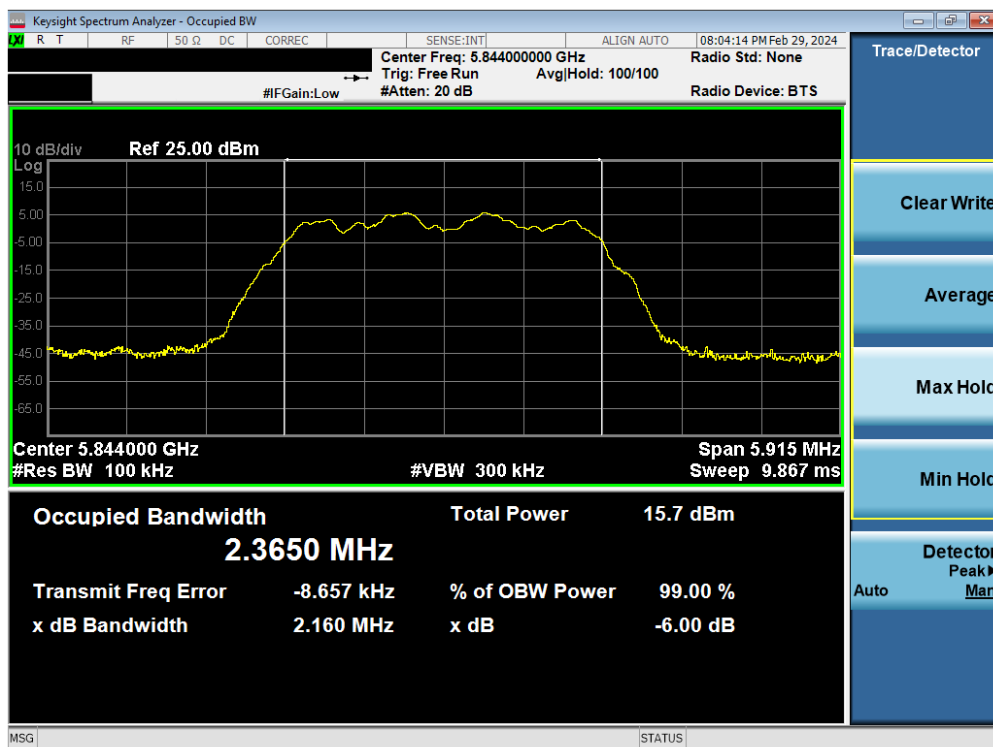


Plot 7-33. 6dB BW & 99% OBW Antenna 2a (HDR4, ePA, 5844MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 38 of 176                    |

V 10.5 12/15/2021

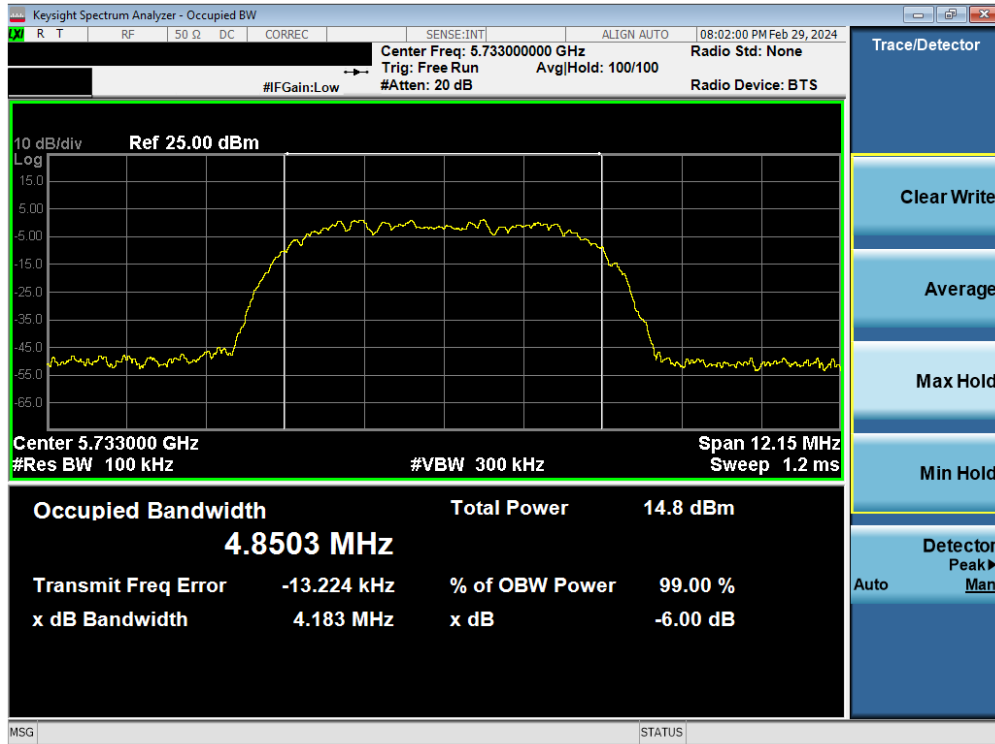


Plot 7-34. 6dB BW & 99% OBW Antenna 2a (HDR8, ePA, 5733MHz)

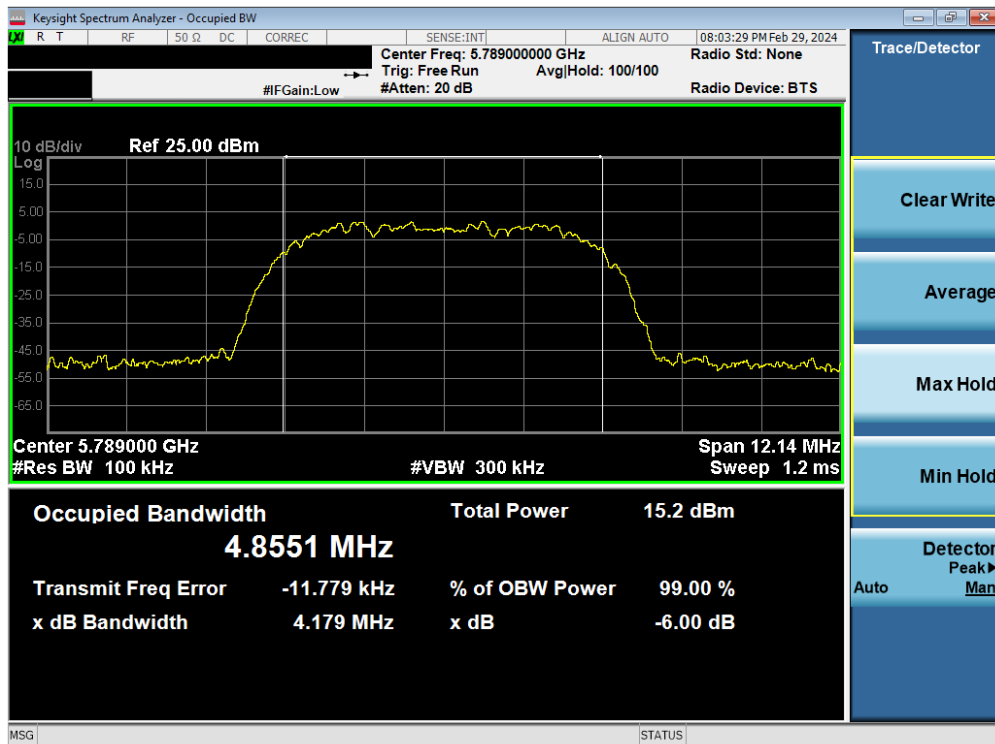

Plot 7-35. 6dB BW & 99% OBW Antenna 2a (HDR8, ePA, 5789MHz)

|                                         |                                                                                     |                            |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|----------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  |                            | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device |                                       | Page 39 of 176                    |

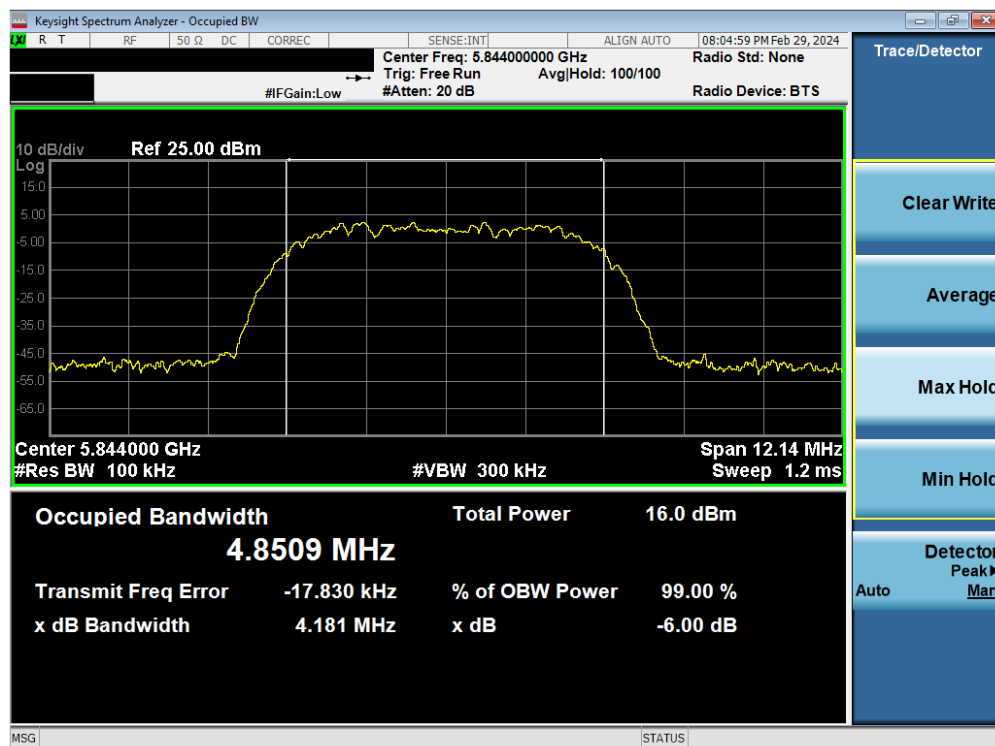

Plot 7-36. 6dB BW & 99% OBW Antenna 2a (HDR8, ePA, 5844MHz)

|                                         |                                                                                                                                   |                            |                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                             | EUT Type:<br>Tablet Device | Page 40 of 176                    |

V 10.5 12/15/2021

## 7.4 Conducted Output Power and Max EIRP Measurement – HDR

§15.407(a.1.iv) §15.407(a.3); RSS-247 [6.2]

### Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. B is the 26dB BW per FCC 15.407.

*In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm).*

*In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm).*

### Test Procedure Used

ANSI C63.10-2013 – Subclause 12.3.3.2 Method PM-G  
KDB 789033 D02 v02r01 – Section E)3)b) Method PM-G

### Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-3. Test Instrument & Measurement Setup**

### Test Notes

None

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 41 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

### 7.4.1 Conducted Output Power Measurements

| Frequency [MHz] | Detector | Mode | Power Scheme | Conducted Powers [dBm] | Conducted Power Limit [dBm] | Conducted Power Margin [dB] |
|-----------------|----------|------|--------------|------------------------|-----------------------------|-----------------------------|
| 5162            | AVG      | HDR4 | ePA          | 11.61                  | 23.98                       | -12.37                      |
| 5204            | AVG      | HDR4 | ePA          | 11.77                  | 23.98                       | -12.21                      |
| 5245            | AVG      | HDR4 | ePA          | 11.65                  | 23.98                       | -12.34                      |
| 5162            | AVG      | HDR4 | iPA          | -2.00                  | 23.98                       | -25.98                      |
| 5204            | AVG      | HDR4 | iPA          | -2.04                  | 23.98                       | -26.02                      |
| 5245            | AVG      | HDR4 | iPA          | -2.40                  | 23.98                       | -26.38                      |
| 5162            | AVG      | HDR8 | ePA          | 11.57                  | 23.98                       | -12.41                      |
| 5204            | AVG      | HDR8 | ePA          | 11.72                  | 23.98                       | -12.26                      |
| 5245            | AVG      | HDR8 | ePA          | 11.58                  | 23.98                       | -12.40                      |
| 5162            | AVG      | HDR8 | iPA          | -2.07                  | 23.98                       | -26.05                      |
| 5204            | AVG      | HDR8 | iPA          | -2.06                  | 23.98                       | -26.04                      |
| 5245            | AVG      | HDR8 | iPA          | -2.00                  | 23.98                       | -25.98                      |
| 5733            | AVG      | HDR4 | ePA          | 12.32                  | 30.00                       | -17.68                      |
| 5789            | AVG      | HDR4 | ePA          | 12.38                  | 30.00                       | -17.62                      |
| 5844            | AVG      | HDR4 | ePA          | 12.28                  | 30.00                       | -17.72                      |
| 5733            | AVG      | HDR4 | iPA          | -1.20                  | 30.00                       | -31.20                      |
| 5789            | AVG      | HDR4 | iPA          | -1.23                  | 30.00                       | -31.23                      |
| 5844            | AVG      | HDR4 | iPA          | -1.06                  | 30.00                       | -31.06                      |
| 5733            | AVG      | HDR8 | ePA          | 12.25                  | 30.00                       | -17.75                      |
| 5789            | AVG      | HDR8 | ePA          | 12.33                  | 30.00                       | -17.67                      |
| 5844            | AVG      | HDR8 | ePA          | 12.23                  | 30.00                       | -17.77                      |
| 5733            | AVG      | HDR8 | iPA          | -1.48                  | 30.00                       | -31.48                      |
| 5789            | AVG      | HDR8 | iPA          | -1.40                  | 30.00                       | -31.40                      |
| 5844            | AVG      | HDR8 | iPA          | -1.23                  | 30.00                       | -31.23                      |

Table 7-8. Antenna 5b FCC Maximum Conducted Output Power

|                                         |                                                                                                                                   |                            |                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                             | EUT Type:<br>Tablet Device | Page 42 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

| Frequency [MHz] | Detector | Mode | Power Scheme | Conducted Powers [dBm] | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p [dBm] | Max e.i.r.p Limit [dBm] | e.i.r.p Margin [dB] |
|-----------------|----------|------|--------------|------------------------|-----------------------------|-----------------------------|-----------------|-------------------|-------------------------|---------------------|
| 5162            | AVG      | HDR4 | ePA          | 8.86                   | -                           | -                           | 2.20            | 11.06             | 13.68                   | -2.62               |
| 5204            | AVG      | HDR4 | ePA          | 8.71                   | -                           | -                           | 2.20            | 10.91             | 13.68                   | -2.77               |
| 5245            | AVG      | HDR4 | ePA          | 8.51                   | -                           | -                           | 2.20            | 10.71             | 13.68                   | -2.97               |
| 5162            | AVG      | HDR4 | iPA          | -2.11                  | -                           | -                           | 2.20            | 0.09              | 13.68                   | -13.59              |
| 5204            | AVG      | HDR4 | iPA          | -2.09                  | -                           | -                           | 2.20            | 0.11              | 13.68                   | -13.57              |
| 5245            | AVG      | HDR4 | iPA          | -2.07                  | -                           | -                           | 2.20            | 0.13              | 13.68                   | -13.55              |
| 5162            | AVG      | HDR8 | ePA          | 11.50                  | -                           | -                           | 2.20            | 13.70             | 16.86                   | -3.16               |
| 5204            | AVG      | HDR8 | ePA          | 11.47                  | -                           | -                           | 2.20            | 13.67             | 16.86                   | -3.19               |
| 5245            | AVG      | HDR8 | ePA          | 11.15                  | -                           | -                           | 2.20            | 13.35             | 16.86                   | -3.51               |
| 5162            | AVG      | HDR8 | iPA          | -2.06                  | -                           | -                           | 2.20            | 0.14              | 16.86                   | -16.72              |
| 5204            | AVG      | HDR8 | iPA          | -2.00                  | -                           | -                           | 2.20            | 0.20              | 16.86                   | -16.65              |
| 5245            | AVG      | HDR8 | iPA          | -2.16                  | -                           | -                           | 2.20            | 0.04              | 16.86                   | -16.81              |
| 5733            | AVG      | HDR4 | ePA          | 12.32                  | 30.00                       | -17.68                      | 0.40            | 12.72             | -                       | -                   |
| 5789            | AVG      | HDR4 | ePA          | 12.38                  | 30.00                       | -17.62                      | 0.40            | 12.78             | -                       | -                   |
| 5844            | AVG      | HDR4 | ePA          | 12.28                  | 30.00                       | -17.72                      | 0.40            | 12.68             | -                       | -                   |
| 5733            | AVG      | HDR4 | iPA          | -1.20                  | 30.00                       | -31.20                      | 0.40            | -0.80             | -                       | -                   |
| 5789            | AVG      | HDR4 | iPA          | -1.23                  | 30.00                       | -31.23                      | 0.40            | -0.83             | -                       | -                   |
| 5844            | AVG      | HDR4 | iPA          | -1.06                  | 30.00                       | -31.06                      | 0.40            | -0.66             | -                       | -                   |
| 5733            | AVG      | HDR8 | ePA          | 12.25                  | 30.00                       | -17.75                      | 0.40            | 12.65             | -                       | -                   |
| 5789            | AVG      | HDR8 | ePA          | 12.33                  | 30.00                       | -17.67                      | 0.40            | 12.73             | -                       | -                   |
| 5844            | AVG      | HDR8 | ePA          | 12.23                  | 30.00                       | -17.77                      | 0.40            | 12.63             | -                       | -                   |
| 5733            | AVG      | HDR8 | iPA          | -1.48                  | 30.00                       | -31.48                      | 0.40            | -1.08             | -                       | -                   |
| 5789            | AVG      | HDR8 | iPA          | -1.40                  | 30.00                       | -31.40                      | 0.40            | -1.00             | -                       | -                   |
| 5844            | AVG      | HDR8 | iPA          | -1.23                  | 30.00                       | -31.23                      | 0.40            | -0.83             | -                       | -                   |

**Table 7-9. Antenna 5b ISD Maximum Conducted Output Power**

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 43 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

| Frequency [MHz] | Detector | Mode | Power Scheme | Conducted Powers [dBm] | Conducted Power Limit [dBm] | Conducted Power Margin [dB] |
|-----------------|----------|------|--------------|------------------------|-----------------------------|-----------------------------|
| 5162            | AVG      | HDR4 | ePA          | 8.17                   | 23.98                       | -15.81                      |
| 5204            | AVG      | HDR4 | ePA          | 8.28                   | 23.98                       | -15.70                      |
| 5245            | AVG      | HDR4 | ePA          | 8.30                   | 23.98                       | -15.69                      |
| 5162            | AVG      | HDR4 | iPA          | 0.79                   | 23.98                       | -23.19                      |
| 5204            | AVG      | HDR4 | iPA          | 0.62                   | 23.98                       | -23.36                      |
| 5245            | AVG      | HDR4 | iPA          | 0.98                   | 23.98                       | -23.00                      |
| 5162            | AVG      | HDR8 | ePA          | 8.50                   | 23.98                       | -15.48                      |
| 5204            | AVG      | HDR8 | ePA          | 8.20                   | 23.98                       | -15.78                      |
| 5245            | AVG      | HDR8 | ePA          | 8.20                   | 23.98                       | -15.78                      |
| 5162            | AVG      | HDR8 | iPA          | 0.79                   | 23.98                       | -23.19                      |
| 5204            | AVG      | HDR8 | iPA          | 0.99                   | 23.98                       | -22.99                      |
| 5245            | AVG      | HDR8 | iPA          | 0.99                   | 23.98                       | -22.99                      |
| 5733            | AVG      | HDR4 | ePA          | 9.85                   | 30.00                       | -20.15                      |
| 5789            | AVG      | HDR4 | ePA          | 9.93                   | 30.00                       | -20.07                      |
| 5844            | AVG      | HDR4 | ePA          | 9.71                   | 30.00                       | -20.29                      |
| 5733            | AVG      | HDR4 | iPA          | 1.93                   | 30.00                       | -28.07                      |
| 5789            | AVG      | HDR4 | iPA          | 1.81                   | 30.00                       | -28.19                      |
| 5844            | AVG      | HDR4 | iPA          | 1.91                   | 30.00                       | -28.09                      |
| 5733            | AVG      | HDR8 | ePA          | 9.85                   | 30.00                       | -20.15                      |
| 5789            | AVG      | HDR8 | ePA          | 9.97                   | 30.00                       | -20.03                      |
| 5844            | AVG      | HDR8 | ePA          | 9.74                   | 30.00                       | -20.26                      |
| 5733            | AVG      | HDR8 | iPA          | 1.89                   | 30.00                       | -28.11                      |
| 5789            | AVG      | HDR8 | iPA          | 1.76                   | 30.00                       | -28.25                      |
| 5844            | AVG      | HDR8 | iPA          | 1.81                   | 30.00                       | -28.19                      |

**Table 7-10. Antenna 4a FCC Maximum Conducted Output Power**

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 44 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

| Frequency [MHz] | Detector | Mode | Power Scheme | Conducted Powers [dBm] | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p [dBm] | Max e.i.r.p Limit [dBm] | e.i.r.p Margin [dB] |
|-----------------|----------|------|--------------|------------------------|-----------------------------|-----------------------------|-----------------|-------------------|-------------------------|---------------------|
| 5162            | AVG      | HDR4 | ePA          | 8.29                   | -                           | -                           | -0.30           | 7.99              | 13.68                   | -5.69               |
| 5204            | AVG      | HDR4 | ePA          | 8.47                   | -                           | -                           | -0.30           | 8.17              | 13.68                   | -5.51               |
| 5245            | AVG      | HDR4 | ePA          | 8.03                   | -                           | -                           | -0.30           | 7.73              | 13.68                   | -5.95               |
| 5162            | AVG      | HDR4 | iPA          | 0.68                   | -                           | -                           | -0.30           | 0.38              | 13.68                   | -13.30              |
| 5204            | AVG      | HDR4 | iPA          | 0.93                   | -                           | -                           | -0.30           | 0.63              | 13.68                   | -13.05              |
| 5245            | AVG      | HDR4 | iPA          | 0.87                   | -                           | -                           | -0.30           | 0.57              | 13.68                   | -13.11              |
| 5162            | AVG      | HDR8 | ePA          | 8.40                   | -                           | -                           | -0.30           | 8.10              | 16.86                   | -8.76               |
| 5204            | AVG      | HDR8 | ePA          | 8.39                   | -                           | -                           | -0.30           | 8.09              | 16.86                   | -8.77               |
| 5245            | AVG      | HDR8 | ePA          | 8.41                   | -                           | -                           | -0.30           | 8.11              | 16.86                   | -8.75               |
| 5162            | AVG      | HDR8 | iPA          | 0.58                   | -                           | -                           | -0.30           | 0.28              | 16.86                   | -16.57              |
| 5204            | AVG      | HDR8 | iPA          | 1.00                   | -                           | -                           | -0.30           | 0.70              | 16.86                   | -16.16              |
| 5245            | AVG      | HDR8 | iPA          | 0.78                   | -                           | -                           | -0.30           | 0.48              | 16.86                   | -16.38              |
| 5733            | AVG      | HDR4 | ePA          | 9.85                   | 30.00                       | -20.15                      | 0.40            | 10.25             | -                       | -                   |
| 5789            | AVG      | HDR4 | ePA          | 9.93                   | 30.00                       | -20.07                      | 0.40            | 10.33             | -                       | -                   |
| 5844            | AVG      | HDR4 | ePA          | 9.71                   | 30.00                       | -20.29                      | 0.40            | 10.11             | -                       | -                   |
| 5733            | AVG      | HDR4 | iPA          | 1.93                   | 30.00                       | -28.07                      | 0.40            | 2.33              | -                       | -                   |
| 5789            | AVG      | HDR4 | iPA          | 1.81                   | 30.00                       | -28.19                      | 0.40            | 2.21              | -                       | -                   |
| 5844            | AVG      | HDR4 | iPA          | 1.91                   | 30.00                       | -28.09                      | 0.40            | 2.31              | -                       | -                   |
| 5733            | AVG      | HDR8 | ePA          | 9.85                   | 30.00                       | -20.15                      | 0.40            | 10.25             | -                       | -                   |
| 5789            | AVG      | HDR8 | ePA          | 9.97                   | 30.00                       | -20.03                      | 0.40            | 10.37             | -                       | -                   |
| 5844            | AVG      | HDR8 | ePA          | 9.74                   | 30.00                       | -20.26                      | 0.40            | 10.14             | -                       | -                   |
| 5733            | AVG      | HDR8 | iPA          | 1.89                   | 30.00                       | -28.11                      | 0.40            | 2.29              | -                       | -                   |
| 5789            | AVG      | HDR8 | iPA          | 1.76                   | 30.00                       | -28.25                      | 0.40            | 2.16              | -                       | -                   |
| 5844            | AVG      | HDR8 | iPA          | 1.81                   | 30.00                       | -28.19                      | 0.40            | 2.21              | -                       | -                   |

**Table 7-11. Antenna 4a ISED Maximum Conducted Output Power**

|                                         |                                                                                                                                   |                            |                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                             | EUT Type:<br>Tablet Device | Page 45 of 176                    |

V 10.5 12/15/2021

| Frequency [MHz] | Detector | Mode | Power Scheme | Conducted Powers [dBm] | Conducted Power Limit [dBm] | Conducted Power Margin [dB] |
|-----------------|----------|------|--------------|------------------------|-----------------------------|-----------------------------|
| 5162            | AVG      | HDR4 | ePA          | 8.96                   | 23.98                       | -15.02                      |
| 5204            | AVG      | HDR4 | ePA          | 8.70                   | 23.98                       | -15.28                      |
| 5245            | AVG      | HDR4 | ePA          | 8.85                   | 23.98                       | -15.13                      |
| 5162            | AVG      | HDR4 | iPA          | -2.10                  | 23.98                       | -26.08                      |
| 5204            | AVG      | HDR4 | iPA          | -2.42                  | 23.98                       | -26.40                      |
| 5245            | AVG      | HDR4 | iPA          | -2.06                  | 23.98                       | -26.04                      |
| 5162            | AVG      | HDR8 | ePA          | 8.90                   | 23.98                       | -15.08                      |
| 5204            | AVG      | HDR8 | ePA          | 8.97                   | 23.98                       | -15.01                      |
| 5245            | AVG      | HDR8 | ePA          | 8.82                   | 23.98                       | -15.16                      |
| 5162            | AVG      | HDR8 | iPA          | -2.34                  | 23.98                       | -26.32                      |
| 5204            | AVG      | HDR8 | iPA          | -2.46                  | 23.98                       | -26.44                      |
| 5245            | AVG      | HDR8 | iPA          | -2.11                  | 23.98                       | -26.09                      |
| 5733            | AVG      | HDR4 | ePA          | 10.94                  | 30.00                       | -19.06                      |
| 5789            | AVG      | HDR4 | ePA          | 10.79                  | 30.00                       | -19.21                      |
| 5844            | AVG      | HDR4 | ePA          | 10.86                  | 30.00                       | -19.14                      |
| 5733            | AVG      | HDR4 | iPA          | -1.08                  | 30.00                       | -31.08                      |
| 5789            | AVG      | HDR4 | iPA          | -1.17                  | 30.00                       | -31.17                      |
| 5844            | AVG      | HDR4 | iPA          | -1.20                  | 30.00                       | -31.20                      |
| 5733            | AVG      | HDR8 | ePA          | 10.89                  | 30.00                       | -19.11                      |
| 5789            | AVG      | HDR8 | ePA          | 10.96                  | 30.00                       | -19.04                      |
| 5844            | AVG      | HDR8 | ePA          | 10.87                  | 30.00                       | -19.13                      |
| 5733            | AVG      | HDR8 | iPA          | -1.16                  | 30.00                       | -31.16                      |
| 5789            | AVG      | HDR8 | iPA          | -1.24                  | 30.00                       | -31.24                      |
| 5844            | AVG      | HDR8 | iPA          | -1.31                  | 30.00                       | -31.31                      |

**Table 7-12. Antenna 2a FCC Maximum Conducted Output Power**

|                                         |                                                                                                                                   |                            |                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                             | EUT Type:<br>Tablet Device | Page 46 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

| Frequency [MHz] | Detector | Mode | Power Scheme | Conducted Powers [dBm] | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p [dBm] | Max e.i.r.p Limit [dBm] | e.i.r.p Margin [dB] |
|-----------------|----------|------|--------------|------------------------|-----------------------------|-----------------------------|-----------------|-------------------|-------------------------|---------------------|
| 5162            | AVG      | HDR4 | ePA          | 8.97                   | -                           | -                           | -1.10           | 7.87              | 13.68                   | -5.81               |
| 5204            | AVG      | HDR4 | ePA          | 8.93                   | -                           | -                           | -1.10           | 7.83              | 13.68                   | -5.85               |
| 5245            | AVG      | HDR4 | ePA          | 8.86                   | -                           | -                           | -1.10           | 7.76              | 13.68                   | -5.92               |
| 5162            | AVG      | HDR4 | iPA          | -2.08                  | -                           | -                           | -1.10           | -3.18             | 13.68                   | -16.86              |
| 5204            | AVG      | HDR4 | iPA          | -2.15                  | -                           | -                           | -1.10           | -3.25             | 13.68                   | -16.92              |
| 5245            | AVG      | HDR4 | iPA          | -2.03                  | -                           | -                           | -1.10           | -3.13             | 13.68                   | -16.80              |
| 5162            | AVG      | HDR8 | ePA          | 9.00                   | -                           | -                           | -1.10           | 7.90              | 16.86                   | -8.96               |
| 5204            | AVG      | HDR8 | ePA          | 8.87                   | -                           | -                           | -1.10           | 7.77              | 16.86                   | -9.08               |
| 5245            | AVG      | HDR8 | ePA          | 8.96                   | -                           | -                           | -1.10           | 7.86              | 16.86                   | -9.00               |
| 5162            | AVG      | HDR8 | iPA          | -2.14                  | -                           | -                           | -1.10           | -3.24             | 16.86                   | -20.09              |
| 5204            | AVG      | HDR8 | iPA          | -2.47                  | -                           | -                           | -1.10           | -3.57             | 16.86                   | -20.43              |
| 5245            | AVG      | HDR8 | iPA          | -2.10                  | -                           | -                           | -1.10           | -3.20             | 16.86                   | -20.06              |
| 5733            | AVG      | HDR4 | ePA          | 10.94                  | 30.00                       | -19.06                      | -1.70           | 9.24              | -                       | -                   |
| 5789            | AVG      | HDR4 | ePA          | 10.79                  | 30.00                       | -19.21                      | -1.70           | 9.09              | -                       | -                   |
| 5844            | AVG      | HDR4 | ePA          | 10.86                  | 30.00                       | -19.14                      | -1.70           | 9.16              | -                       | -                   |
| 5733            | AVG      | HDR4 | iPA          | -1.08                  | 30.00                       | -31.08                      | -1.70           | -2.78             | -                       | -                   |
| 5789            | AVG      | HDR4 | iPA          | -1.17                  | 30.00                       | -31.17                      | -1.70           | -2.87             | -                       | -                   |
| 5844            | AVG      | HDR4 | iPA          | -1.20                  | 30.00                       | -31.20                      | -1.70           | -2.90             | -                       | -                   |
| 5733            | AVG      | HDR8 | ePA          | 10.89                  | 30.00                       | -19.11                      | -1.70           | 9.19              | -                       | -                   |
| 5789            | AVG      | HDR8 | ePA          | 10.96                  | 30.00                       | -19.04                      | -1.70           | 9.26              | -                       | -                   |
| 5844            | AVG      | HDR8 | ePA          | 10.87                  | 30.00                       | -19.13                      | -1.70           | 9.17              | -                       | -                   |
| 5733            | AVG      | HDR8 | iPA          | -1.16                  | 30.00                       | -31.16                      | -1.70           | -2.86             | -                       | -                   |
| 5789            | AVG      | HDR8 | iPA          | -1.24                  | 30.00                       | -31.24                      | -1.70           | -2.94             | -                       | -                   |
| 5844            | AVG      | HDR8 | iPA          | -1.31                  | 30.00                       | -31.31                      | -1.70           | -3.01             | -                       | -                   |

**Table 7-13. Antenna 2a ISED Maximum Conducted Output Power**

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 47 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

| Frequency [MHz] | Detector | Mode | Power Scheme | Conducted Powers [dBm] |            |        | Conducted Power Limit [dBm] | Conducted Power Margin [dB] |
|-----------------|----------|------|--------------|------------------------|------------|--------|-----------------------------|-----------------------------|
|                 |          |      |              | Antenna 5b             | Antenna 4a | Summed |                             |                             |
| 5162            | AVG      | HDR4 | ePA          | 9.26                   | 8.14       | 11.75  | 23.98                       | -12.23                      |
| 5204            | AVG      | HDR4 | ePA          | 9.41                   | 8.20       | 11.86  | 23.98                       | -12.12                      |
| 5245            | AVG      | HDR4 | ePA          | 9.49                   | 8.22       | 11.91  | 23.98                       | -12.07                      |
| 5162            | AVG      | HDR4 | iPA          | -2.04                  | 0.82       | 2.63   | 23.98                       | -21.35                      |
| 5204            | AVG      | HDR4 | iPA          | -2.09                  | 0.94       | 2.69   | 23.98                       | -21.29                      |
| 5245            | AVG      | HDR4 | iPA          | -2.00                  | 0.58       | 2.49   | 23.98                       | -21.49                      |
| 5162            | AVG      | HDR8 | ePA          | 11.41                  | 8.43       | 13.18  | 23.98                       | -10.80                      |
| 5204            | AVG      | HDR8 | ePA          | 11.64                  | 8.17       | 13.25  | 23.98                       | -10.73                      |
| 5245            | AVG      | HDR8 | ePA          | 11.33                  | 8.25       | 13.07  | 23.98                       | -10.91                      |
| 5162            | AVG      | HDR8 | iPA          | -2.08                  | 0.72       | 2.55   | 23.98                       | -21.43                      |
| 5204            | AVG      | HDR8 | iPA          | -2.11                  | 0.50       | 2.40   | 23.98                       | -21.58                      |
| 5245            | AVG      | HDR8 | iPA          | -2.03                  | 0.96       | 2.73   | 23.98                       | -21.25                      |
| 5733            | AVG      | HDR4 | ePA          | 11.98                  | 9.63       | 13.97  | 30.00                       | -16.03                      |
| 5789            | AVG      | HDR4 | ePA          | 12.22                  | 9.93       | 14.24  | 30.00                       | -15.76                      |
| 5844            | AVG      | HDR4 | ePA          | 12.07                  | 9.85       | 14.11  | 30.00                       | -15.89                      |
| 5733            | AVG      | HDR4 | iPA          | -1.32                  | 1.82       | 3.54   | 30.00                       | -26.46                      |
| 5789            | AVG      | HDR4 | iPA          | -1.10                  | 1.87       | 3.64   | 30.00                       | -26.36                      |
| 5844            | AVG      | HDR4 | iPA          | -1.17                  | 1.91       | 3.65   | 30.00                       | -26.35                      |
| 5733            | AVG      | HDR8 | ePA          | 12.31                  | 9.99       | 14.31  | 30.00                       | -15.69                      |
| 5789            | AVG      | HDR8 | ePA          | 12.18                  | 9.98       | 14.23  | 30.00                       | -15.77                      |
| 5844            | AVG      | HDR8 | ePA          | 11.81                  | 9.87       | 13.96  | 30.00                       | -16.04                      |
| 5733            | AVG      | HDR8 | iPA          | -1.03                  | 1.61       | 3.50   | 30.00                       | -26.50                      |
| 5789            | AVG      | HDR8 | iPA          | -1.11                  | 1.68       | 3.52   | 30.00                       | -26.48                      |
| 5844            | AVG      | HDR8 | iPA          | -1.25                  | 1.83       | 3.57   | 30.00                       | -26.43                      |

Table 7-14. TxBF FCC Maximum Conducted Output Power

|                                         |                                                                                                                                   |                            |                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                             | EUT Type:<br>Tablet Device | Page 48 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

| Frequency [MHz] | Detector | Mode | Power Scheme | Conducted Powers [dBm] |            |        | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p [dBm] | Max e.i.r.p Limit [dBm] | e.i.r.p Margin [dB] |
|-----------------|----------|------|--------------|------------------------|------------|--------|-----------------------------|-----------------------------|-----------------|-------------------|-------------------------|---------------------|
|                 |          |      |              | Antenna 5b             | Antenna 4a | Summed |                             |                             |                 |                   |                         |                     |
| 5162            | AVG      | HDR4 | ePA          | 2.78                   | 5.07       | 7.08   | -                           | -                           | 4.05            | 11.13             | 13.68                   | -2.55               |
| 5204            | AVG      | HDR4 | ePA          | 2.85                   | 5.40       | 7.32   | -                           | -                           | 4.05            | 11.37             | 13.68                   | -2.31               |
| 5245            | AVG      | HDR4 | ePA          | 2.65                   | 5.43       | 7.27   | -                           | -                           | 4.05            | 11.32             | 13.68                   | -2.36               |
| 5162            | AVG      | HDR4 | iPA          | -2.02                  | 0.67       | 2.54   | -                           | -                           | 4.05            | 6.59              | 13.68                   | -7.09               |
| 5204            | AVG      | HDR4 | iPA          | -2.16                  | 0.85       | 2.61   | -                           | -                           | 4.05            | 6.66              | 13.68                   | -7.02               |
| 5245            | AVG      | HDR4 | iPA          | -2.07                  | 0.98       | 2.73   | -                           | -                           | 4.05            | 6.78              | 13.68                   | -6.90               |
| 5162            | AVG      | HDR8 | ePA          | 5.21                   | 7.89       | 9.77   | -                           | -                           | 4.05            | 13.82             | 16.86                   | -3.04               |
| 5204            | AVG      | HDR8 | ePA          | 5.39                   | 7.77       | 9.75   | -                           | -                           | 4.05            | 13.80             | 16.86                   | -3.06               |
| 5245            | AVG      | HDR8 | ePA          | 5.49                   | 7.76       | 9.78   | -                           | -                           | 4.05            | 13.83             | 16.86                   | -3.03               |
| 5162            | AVG      | HDR8 | iPA          | -2.46                  | 0.75       | 2.44   | -                           | -                           | 4.05            | 6.49              | 16.86                   | -10.37              |
| 5204            | AVG      | HDR8 | iPA          | -2.22                  | 0.87       | 2.60   | -                           | -                           | 4.05            | 6.65              | 16.86                   | -10.21              |
| 5245            | AVG      | HDR8 | iPA          | -2.11                  | 0.74       | 2.55   | -                           | -                           | 4.05            | 6.60              | 16.86                   | -10.26              |
| 5733            | AVG      | HDR4 | ePA          | 11.98                  | 9.63       | 13.97  | 30.00                       | -16.03                      | 3.41            | 17.38             | -                       | -                   |
| 5789            | AVG      | HDR4 | ePA          | 12.22                  | 9.93       | 14.24  | 30.00                       | -15.76                      | 3.41            | 17.65             | -                       | -                   |
| 5844            | AVG      | HDR4 | ePA          | 12.07                  | 9.85       | 14.11  | 30.00                       | -15.89                      | 3.41            | 17.52             | -                       | -                   |
| 5733            | AVG      | HDR4 | iPA          | -1.32                  | 1.82       | 3.54   | 30.00                       | -26.46                      | 3.41            | 6.95              | -                       | -                   |
| 5789            | AVG      | HDR4 | iPA          | -1.10                  | 1.87       | 3.64   | 30.00                       | -26.36                      | 3.41            | 7.05              | -                       | -                   |
| 5844            | AVG      | HDR4 | iPA          | -1.17                  | 1.91       | 3.65   | 30.00                       | -26.35                      | 3.41            | 7.06              | -                       | -                   |
| 5733            | AVG      | HDR8 | ePA          | 12.31                  | 9.99       | 14.31  | 30.00                       | -15.69                      | 3.41            | 17.72             | -                       | -                   |
| 5789            | AVG      | HDR8 | ePA          | 12.18                  | 9.98       | 14.23  | 30.00                       | -15.77                      | 3.41            | 17.64             | -                       | -                   |
| 5844            | AVG      | HDR8 | ePA          | 11.81                  | 9.87       | 13.96  | 30.00                       | -16.04                      | 3.41            | 17.37             | -                       | -                   |
| 5733            | AVG      | HDR8 | iPA          | -1.03                  | 1.61       | 3.50   | 30.00                       | -26.50                      | 3.41            | 6.91              | -                       | -                   |
| 5789            | AVG      | HDR8 | iPA          | -1.11                  | 1.68       | 3.52   | 30.00                       | -26.48                      | 3.41            | 6.93              | -                       | -                   |
| 5844            | AVG      | HDR8 | iPA          | -1.25                  | 1.83       | 3.57   | 30.00                       | -26.43                      | 3.41            | 6.98              | -                       | -                   |

**Table 7-15. TxBF ISED Maximum Conducted Output Power**

|                                         |                                                                                                                                   |                            |                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                             | EUT Type:<br>Tablet Device | Page 49 of 176                    |

V 10.5 12/15/2021

**Note:**

Per ANSI C63.10-2013 and KDB 662911 v02r01 Section E1), the conducted powers at Antenna 5b and Antenna 4a were first measured separately during TxBF transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where  $G_N$  is the gain of the nth antenna and  $N_{ANT}$ , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Per ANSI C63.10-2013 Section 14.4.3, the uncorrelated directional gain is calculated using the following formula, where  $G_N$  is the gain of the nth antenna and  $N_{ANT}$ , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}] \text{ dBi}$$

**Sample TxBF Calculation:**

At 5162MHz, the average conducted output power was measured to be 2.78dBm for Antenna 5b and 5.07dBm for Antenna 4a.

$$\text{Antenna 5b} + \text{Antenna 4a} = \text{TxBF}$$

$$(2.78 \text{ dBm} + 5.07 \text{ dBm}) = (1.897 \text{ mW} + 3.214 \text{ mW}) = 5.111 \text{ mW} = 7.08 \text{ dBm}$$

**Sample e.i.r.p. Calculation:**

At 5162MHz, the average conducted output power was measured to be 7.08dBm with an Antenna gain of 4.05 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$7.08 \text{ dBm} + 4.05 \text{ dBi} = 11.13 \text{ dBm}$$

|                                         |                                                                                                                                   |                            |                                          |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | <b>Approved by:</b><br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                             | EUT Type:<br>Tablet Device | Page 50 of 176                           |

V 10.5 12/15/2021

## 7.5 Maximum Power Spectral Density – HDR

§15.407(a.1.iv) §15.407(a.3); RSS-247 [6.2]

### Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

***In the 5.15 – 5.25GHz band, the maximum permissible power spectral density is 11dBm/MHz.***

***In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.***

### Test Procedure Used

ANSI C63.10-2013 – Subclause 12.3.2.2

KDB 789033 D02 v02r01 – Section F

### Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz for U-NII 1, 500kHz for U-NII 3
4. VBW  $\geq$  3MHz for U-NII 1,  $\geq$  3 x RBW for U-NII 3
5. Number of sweep points  $\geq$  2 x (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-4. Test Instrument & Measurement Setup**

### Test Notes

None

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 51 of 176                    |

V 10.5 12/15/2021

### 7.5.1 Antenna 5b Power Spectral Density Measurements

|        | Frequency [MHz] | Data Rate [Mbps] | Mode | Power Scheme | Measured Power Density [dBm/MHz] | Max Power Density [dBm/MHz] | Margin [dB] |
|--------|-----------------|------------------|------|--------------|----------------------------------|-----------------------------|-------------|
| Band 1 | 5162            | 4.0              | HDR4 | ePA          | 7.77                             | 11.00                       | -3.23       |
|        | 5204            | 4.0              | HDR4 | ePA          | 8.23                             | 11.00                       | -2.78       |
|        | 5245            | 4.0              | HDR4 | ePA          | 8.11                             | 11.00                       | -2.89       |
|        | 5162            | 4.0              | HDR4 | iPA          | -4.65                            | 11.00                       | -15.65      |
|        | 5204            | 4.0              | HDR4 | iPA          | -4.33                            | 11.00                       | -15.33      |
|        | 5245            | 4.0              | HDR4 | iPA          | -5.02                            | 11.00                       | -16.02      |
|        | 5162            | 8.0              | HDR8 | ePA          | 5.22                             | 11.00                       | -5.78       |
|        | 5204            | 8.0              | HDR8 | ePA          | 5.82                             | 11.00                       | -5.19       |
|        | 5245            | 8.0              | HDR8 | ePA          | 5.69                             | 11.00                       | -5.32       |
|        | 5162            | 8.0              | HDR8 | iPA          | -7.14                            | 11.00                       | -18.14      |
|        | 5204            | 8.0              | HDR8 | iPA          | -6.54                            | 11.00                       | -17.54      |
|        | 5245            | 8.0              | HDR8 | iPA          | -7.32                            | 11.00                       | -18.32      |


Table 7-16. FCC Power Spectral Density Measurements Antenna 5b

|        | Frequency [MHz] | Data Rate [Mbps] | Mode | Power Scheme | Measured Power Density [dBm/MHz] | Antenna Gain [dBi] | e.i.r.p. Power Density [dBm/MHz] | ISED Max e.i.r.p. Power Density [dBm/MHz] | Margin [dB] |
|--------|-----------------|------------------|------|--------------|----------------------------------|--------------------|----------------------------------|-------------------------------------------|-------------|
| Band 1 | 5162            | 4.0              | HDR4 | ePA          | 5.79                             | 2.20               | 7.99                             | 10.00                                     | -2.01       |
|        | 5204            | 4.0              | HDR4 | ePA          | 6.22                             | 2.20               | 8.42                             | 10.00                                     | -1.58       |
|        | 5245            | 4.0              | HDR4 | ePA          | 6.03                             | 2.20               | 8.23                             | 10.00                                     | -1.77       |
|        | 5162            | 4.0              | HDR4 | iPA          | -4.65                            | 2.20               | -2.45                            | 10.00                                     | -12.45      |
|        | 5204            | 4.0              | HDR4 | iPA          | -4.33                            | 2.20               | -2.13                            | 10.00                                     | -12.13      |
|        | 5245            | 4.0              | HDR4 | iPA          | -5.02                            | 2.20               | -2.82                            | 10.00                                     | -12.82      |
|        | 5162            | 8.0              | HDR8 | ePA          | 5.40                             | 2.20               | 7.60                             | 10.00                                     | -2.40       |
|        | 5204            | 8.0              | HDR8 | ePA          | 5.55                             | 2.20               | 7.75                             | 10.00                                     | -2.25       |
|        | 5245            | 8.0              | HDR8 | ePA          | 5.40                             | 2.20               | 7.60                             | 10.00                                     | -2.40       |
|        | 5162            | 8.0              | HDR8 | iPA          | -7.14                            | 2.20               | -4.94                            | 10.00                                     | -14.94      |
|        | 5204            | 8.0              | HDR8 | iPA          | -6.54                            | 2.20               | -4.34                            | 10.00                                     | -14.34      |
|        | 5245            | 8.0              | HDR8 | iPA          | -7.32                            | 2.20               | -5.12                            | 10.00                                     | -15.12      |


Table 7-17. ISED Power Spectral Density Measurements Antenna 5b

|                                         |                                                                                                                                   |                            |                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                             | EUT Type:<br>Tablet Device | Page 52 of 176                    |

V 10.5 12/15/2021

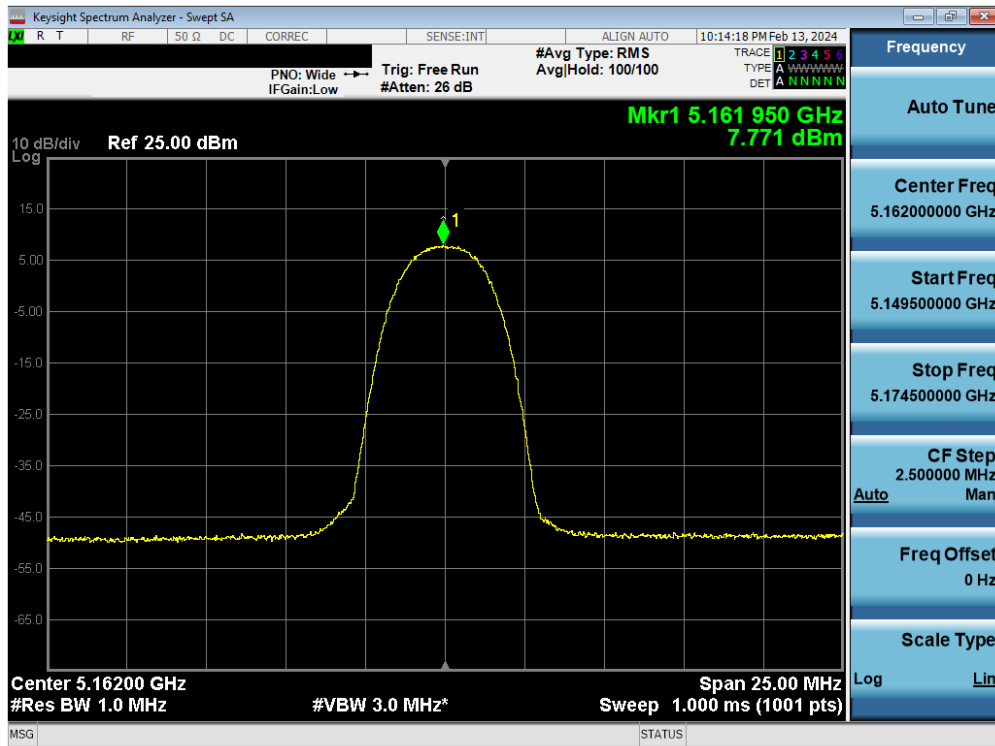

Plot 7-37. FCC PSD Antenna 5b (HDR4, ePA – 5162MHz)

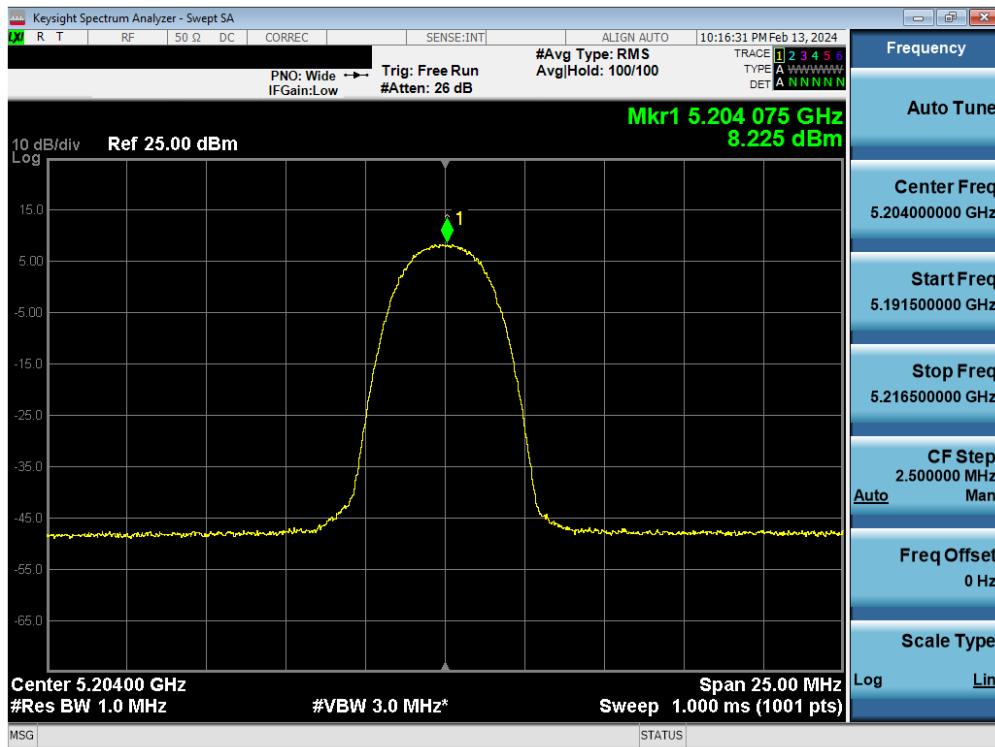


Plot 7-38. FCC PSD Antenna 5b (HDR4, ePA – 5204MHz)


|                                         |                                                                                                                                  |                            |                                   |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                            | EUT Type:<br>Tablet Device | Page 53 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

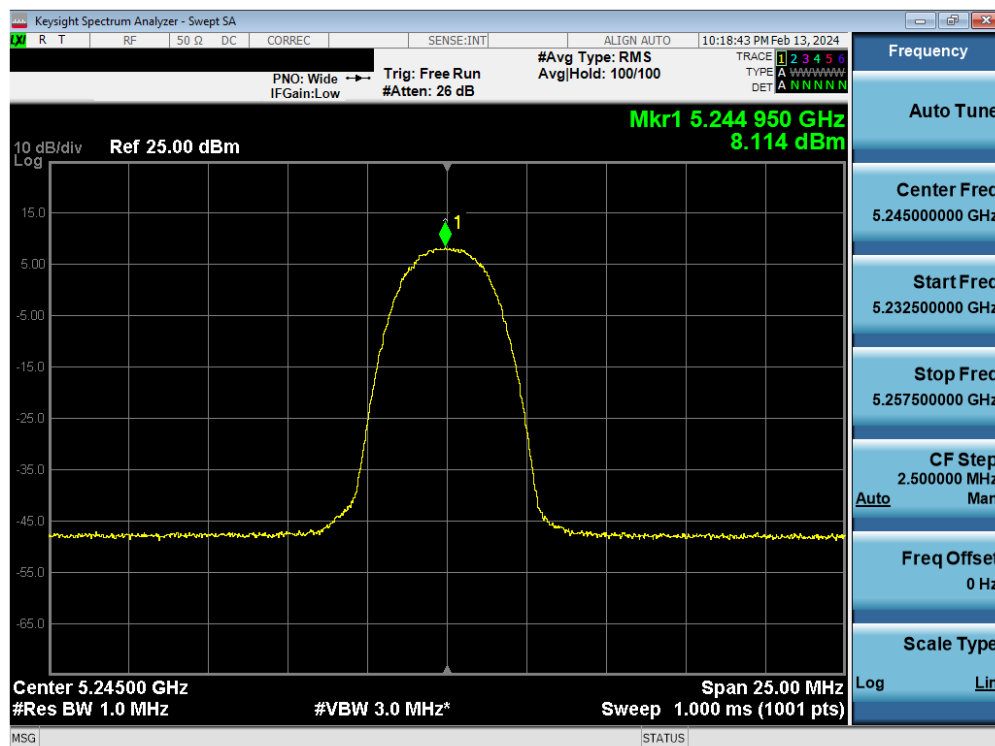

Plot 7-39. FCC PSD Antenna 5b (HDR4, ePA– 5245MHz)

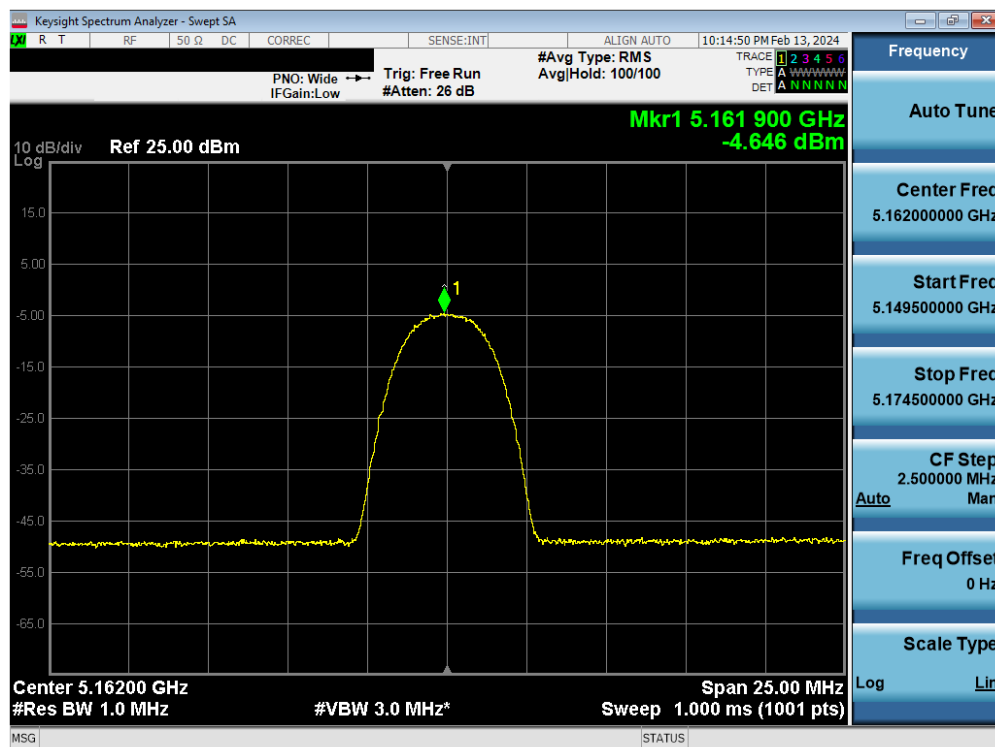


Plot 7-40. FCC/ISED PSD Antenna 5b (HDR4, iPA – 5162MHz)


|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 54 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

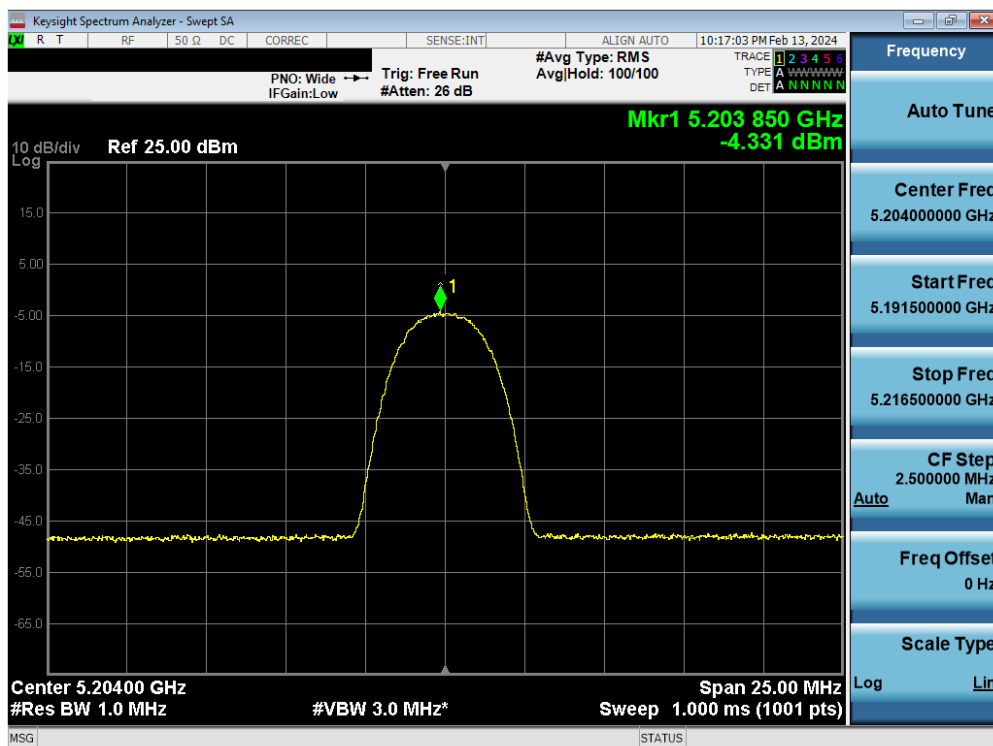

Plot 7-41. FCC/ISED PSD Antenna 5b (HDR4, iPA – 5204MHz)

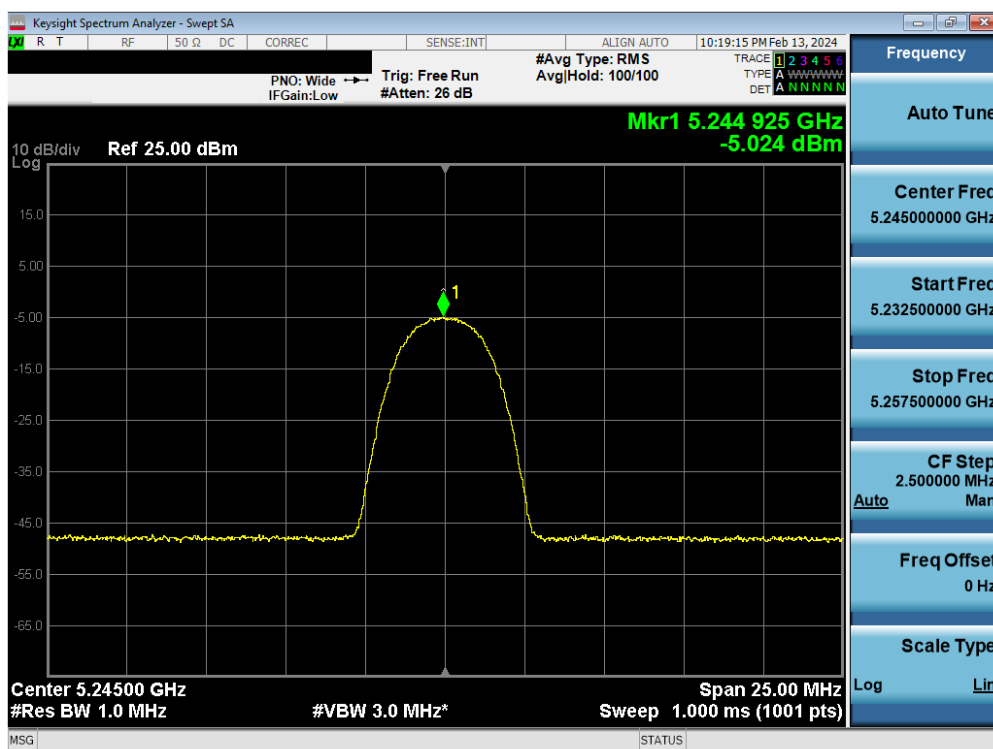


Plot 7-42. FCC/ISED PSD Antenna 5b (HDR4, iPA– 5245MHz)


|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 55 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

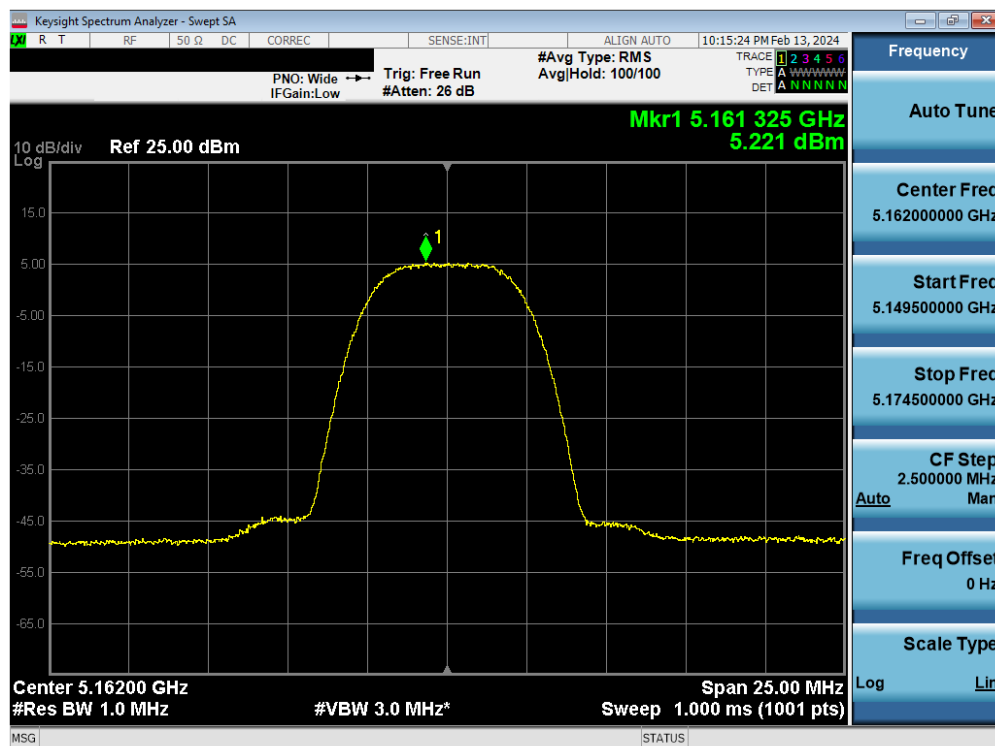

Plot 7-43. FCC PSD Antenna 5b (HDR8, ePA – 5162MHz)

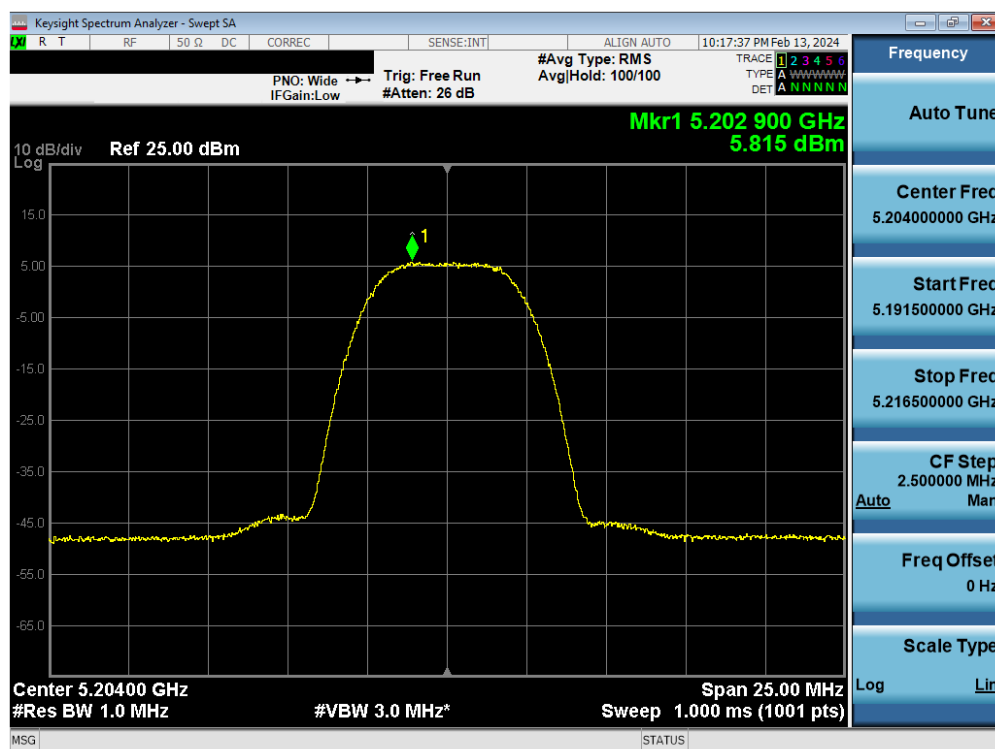


Plot 7-44. FCC PSD Antenna 5b (HDR8, ePA – 5204MHz)


|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 56 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

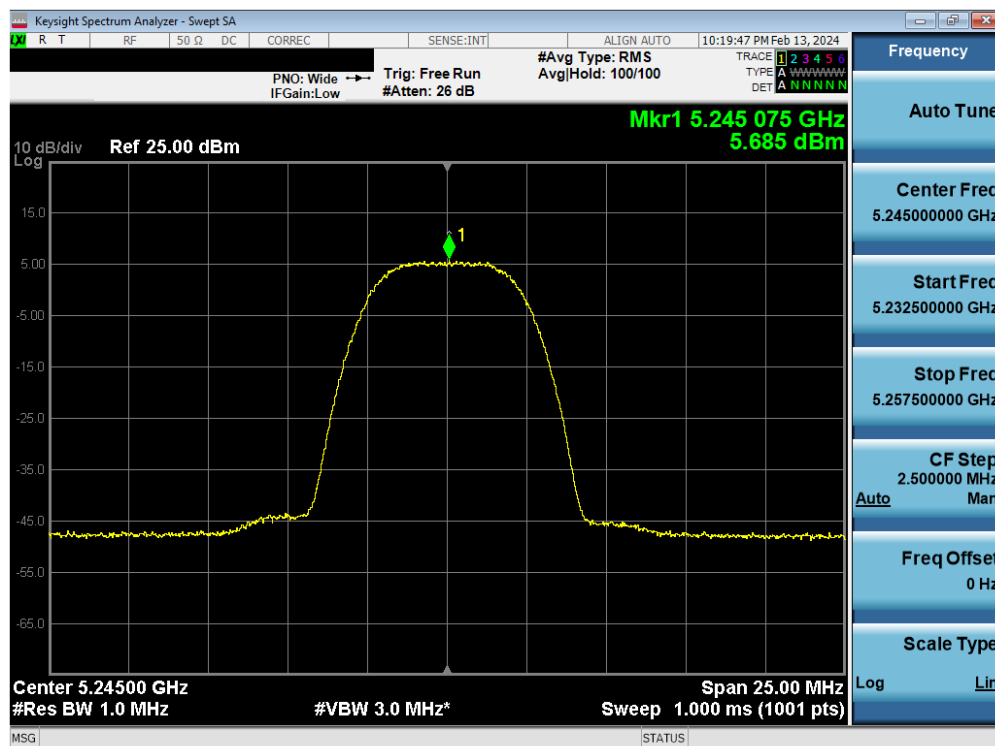


Plot 7-45. FCC PSD Antenna 5b (HDR8, ePA- 5245MHz)

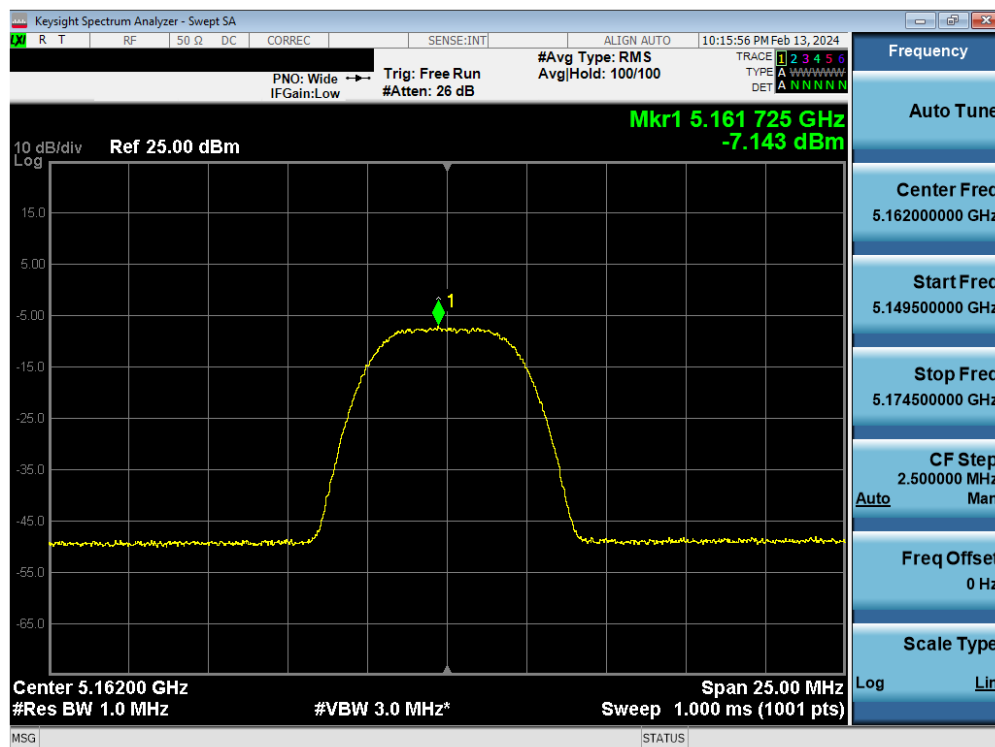


Plot 7-46. FCC/ISED PSD Antenna 5b (HDR8, iPA - 5162MHz)

|                                         |                                                                                                                                   |                            |                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                             | EUT Type:<br>Tablet Device | Page 57 of 176                    |

V 10.5 12/15/2021

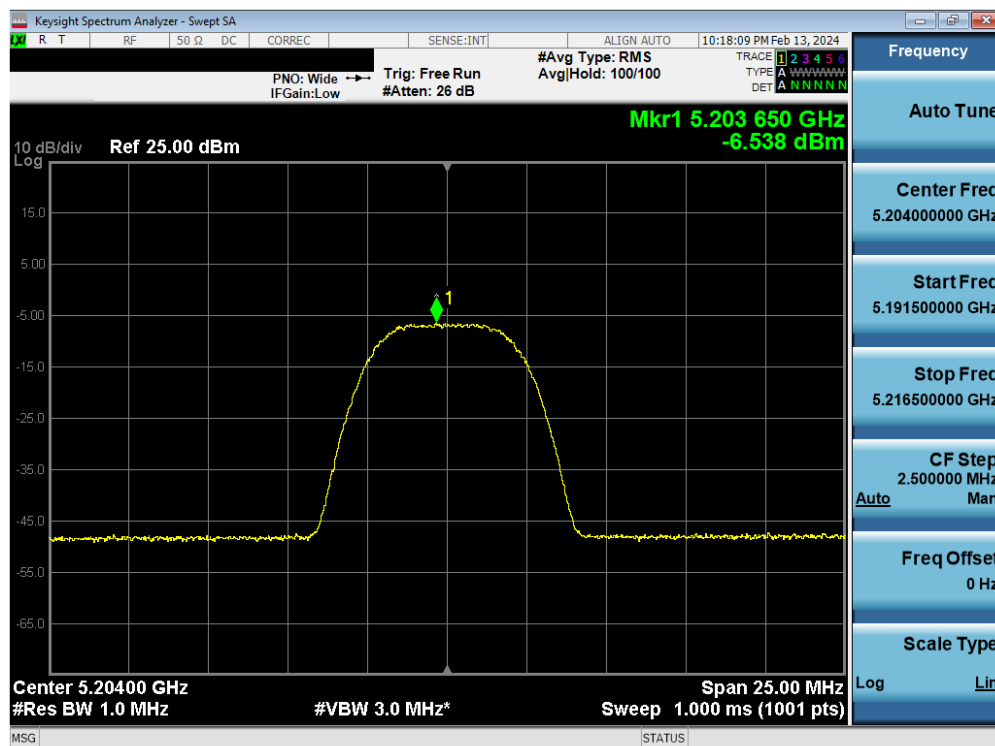


Plot 7-47. FCC/ISED PSD Antenna 5b (HDR8, iPA – 5204MHz)

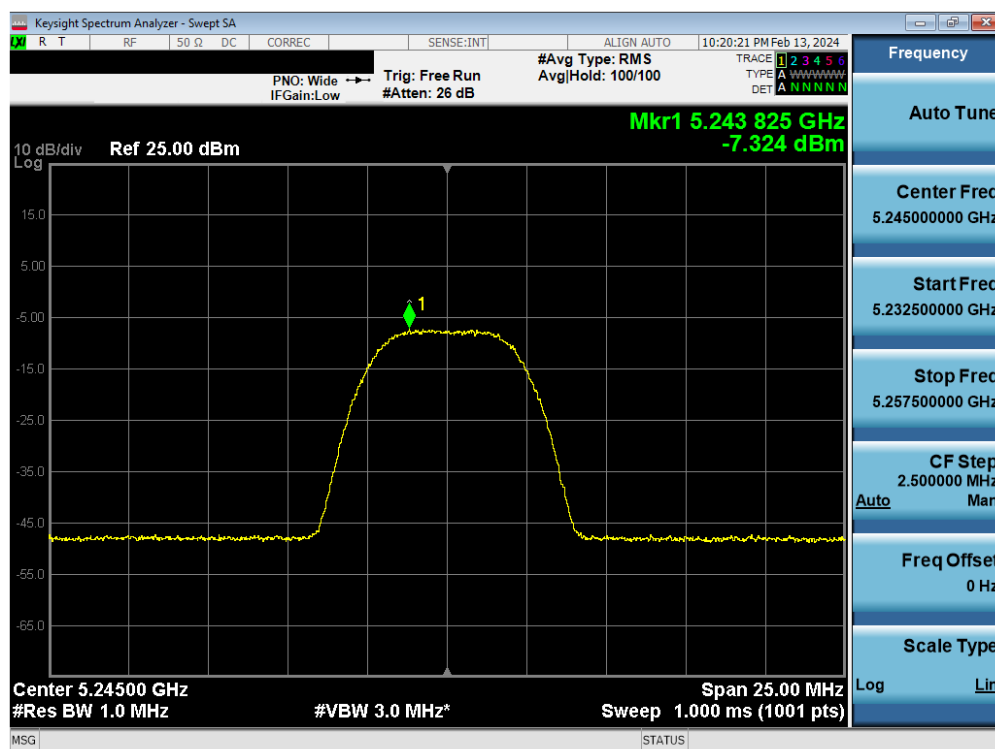


Plot 7-48. FCC/ISED PSD Antenna 5b (HDR8, iPA– 5245MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 58 of 176                    |

V 10.5 12/15/2021

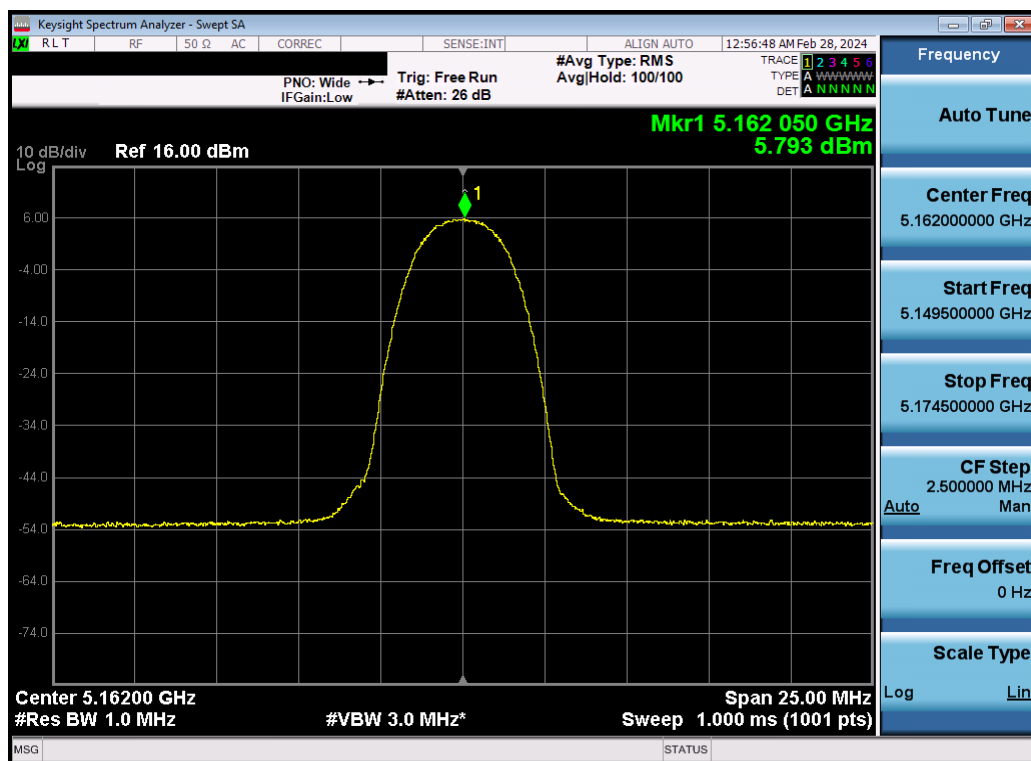


Plot 7-49. ISED PSD Antenna 5b (HDR4, ePA – 5162MHz)

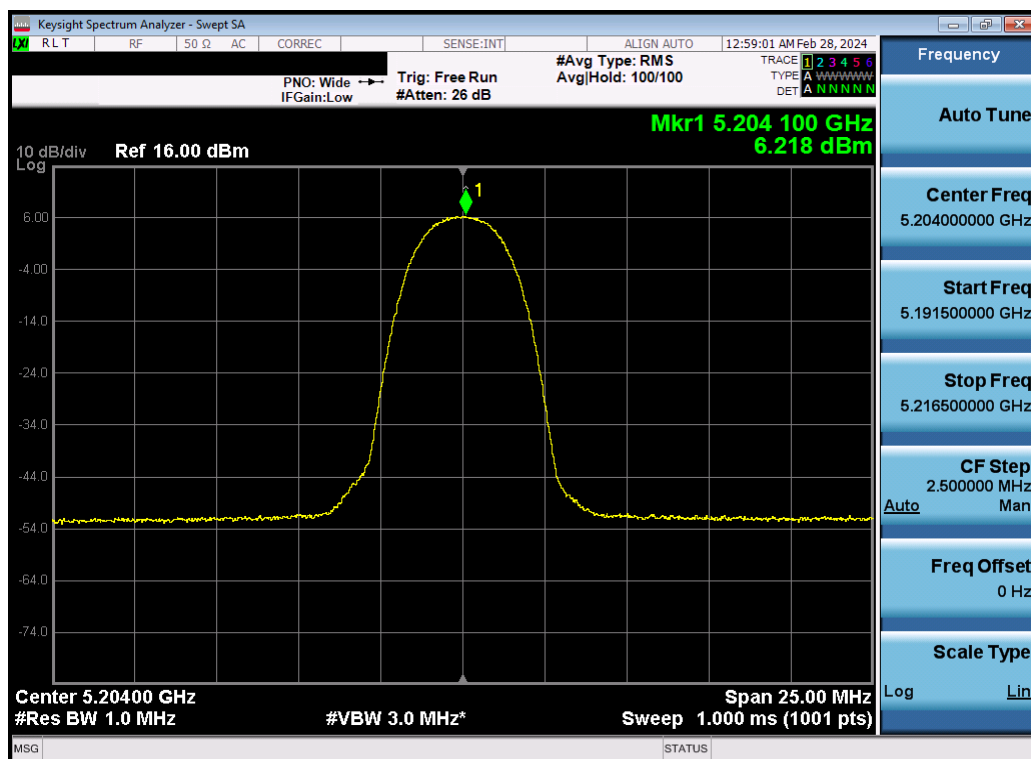


Plot 7-50. ISED PSD Antenna 5b (HDR4, ePA – 5204MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 59 of 176                    |

V 10.5 12/15/2021

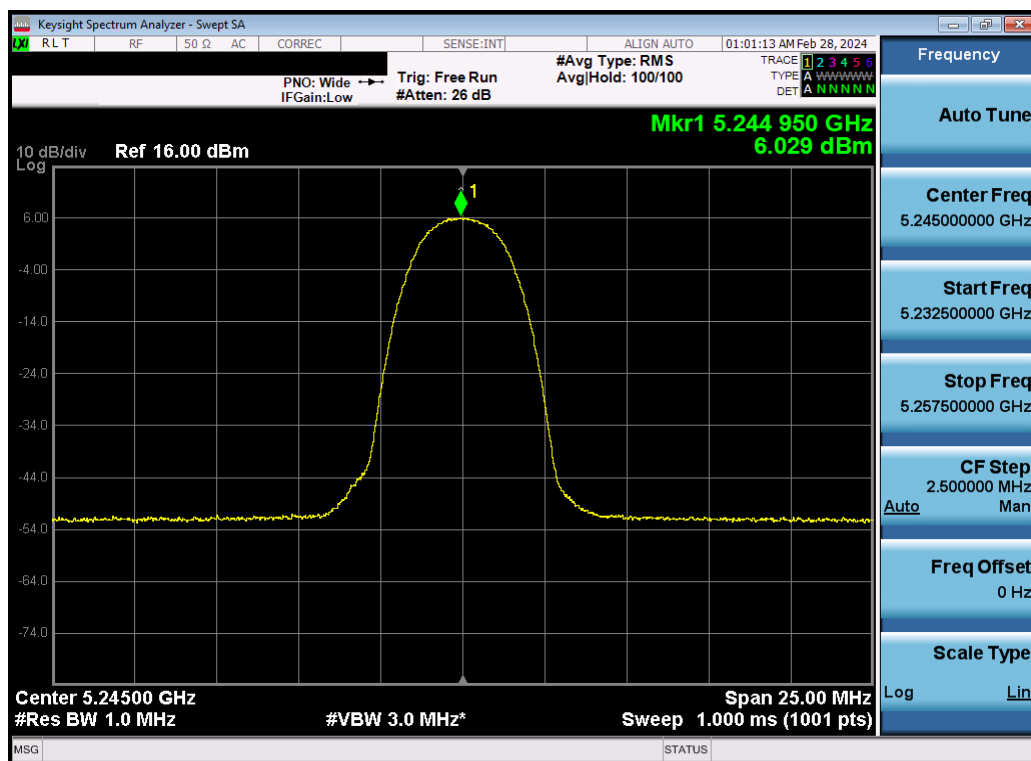

Plot 7-51. ISED PSD Antenna 5b (HDR4, ePA– 5245MHz)

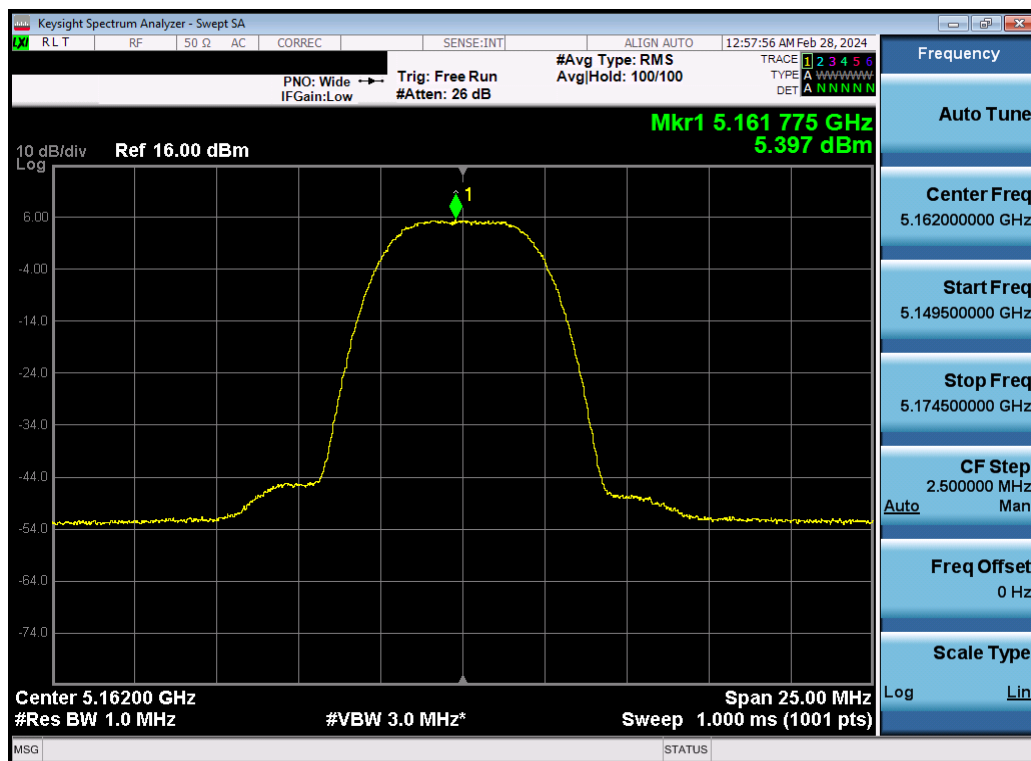


Plot 7-52. ISED PSD Antenna 5b (HDR8, ePA – 5162MHz)


|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 60 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

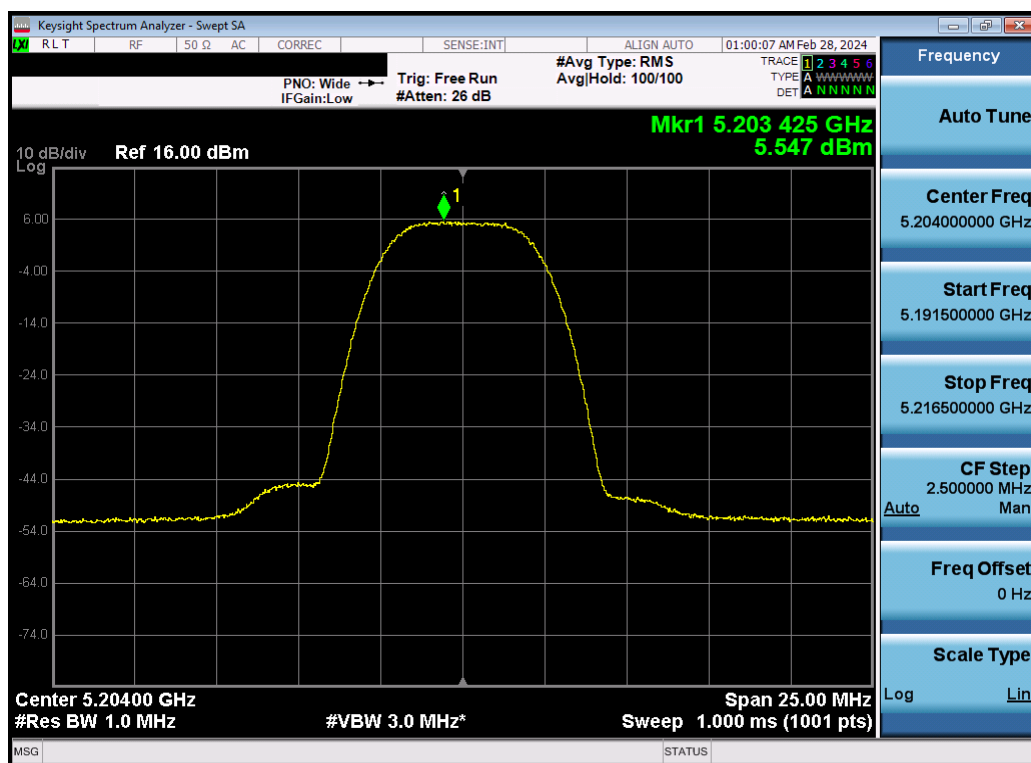

Plot 7-53. ISED PSD Antenna 5b (HDR8, ePA – 5204MHz)

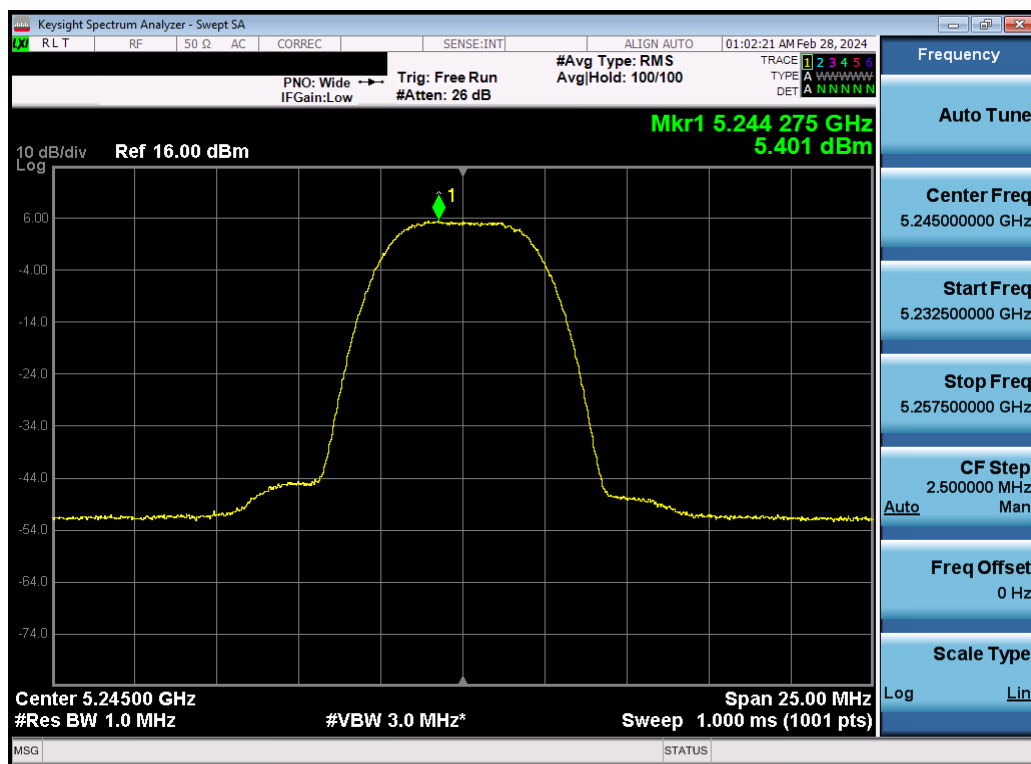


Plot 7-54. ISED PSD Antenna 5b (HDR8, ePA– 5245MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 61 of 176                    |

V 10.5 12/15/2021

|        | Frequency [MHz] | Data Rate [Mbps] | Mode | Power Scheme | Measured Power Density [dBm/500kHz] | Max Permissible Power Density [dBm/500kHz] | Margin [dB] |
|--------|-----------------|------------------|------|--------------|-------------------------------------|--------------------------------------------|-------------|
| Band 3 | 5733            | 4.0              | HDR4 | ePA          | 6.42                                | 30.00                                      | -23.58      |
|        | 5789            | 4.0              | HDR4 | ePA          | 6.16                                | 30.00                                      | -23.84      |
|        | 5844            | 4.0              | HDR4 | ePA          | 5.90                                | 30.00                                      | -24.10      |
|        | 5733            | 4.0              | HDR4 | iPA          | -6.14                               | 30.00                                      | -36.14      |
|        | 5789            | 4.0              | HDR4 | iPA          | -6.14                               | 30.00                                      | -36.14      |
|        | 5844            | 4.0              | HDR4 | iPA          | -6.65                               | 30.00                                      | -36.65      |
|        | 5733            | 8.0              | HDR8 | ePA          | 3.87                                | 30.00                                      | -26.13      |
|        | 5789            | 8.0              | HDR8 | ePA          | 3.02                                | 30.00                                      | -26.99      |
|        | 5844            | 8.0              | HDR8 | ePA          | 2.77                                | 30.00                                      | -27.24      |
|        | 5733            | 8.0              | HDR8 | iPA          | -9.32                               | 30.00                                      | -39.32      |
|        | 5789            | 8.0              | HDR8 | iPA          | -9.37                               | 30.00                                      | -39.37      |
|        | 5844            | 8.0              | HDR8 | iPA          | -9.68                               | 30.00                                      | -39.68      |


Table 7-18. Power Spectral Density Measurements Antenna 5b

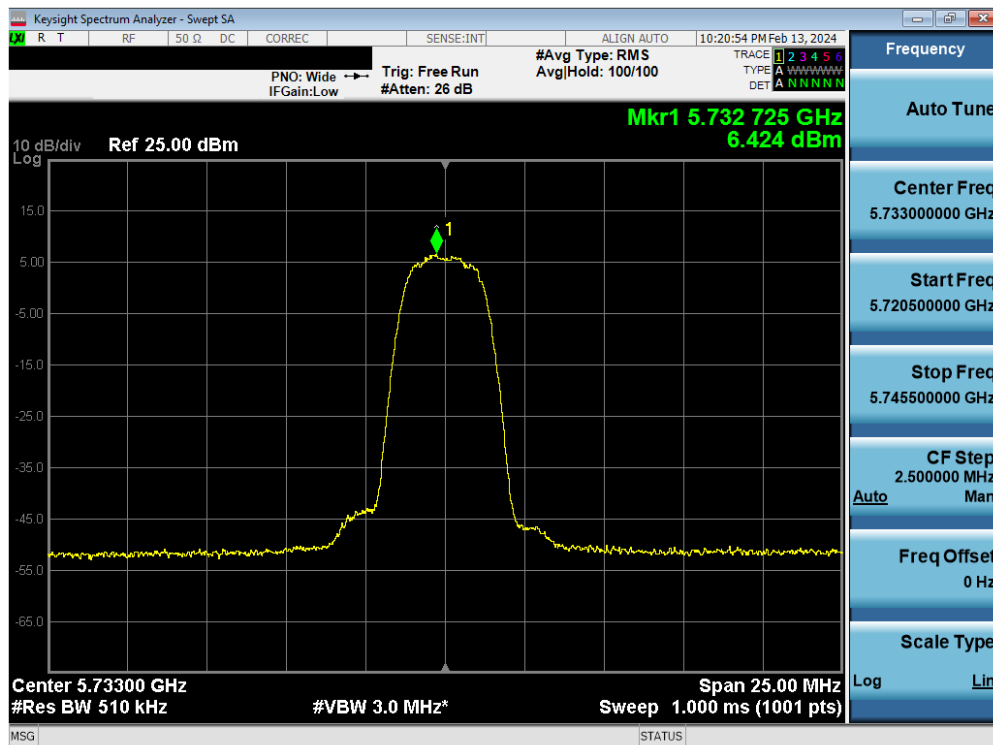


Plot 7-55. PSD Antenna 5b (HDR4, ePA 5733MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 62 of 176                    |

V 10.5 12/15/2021

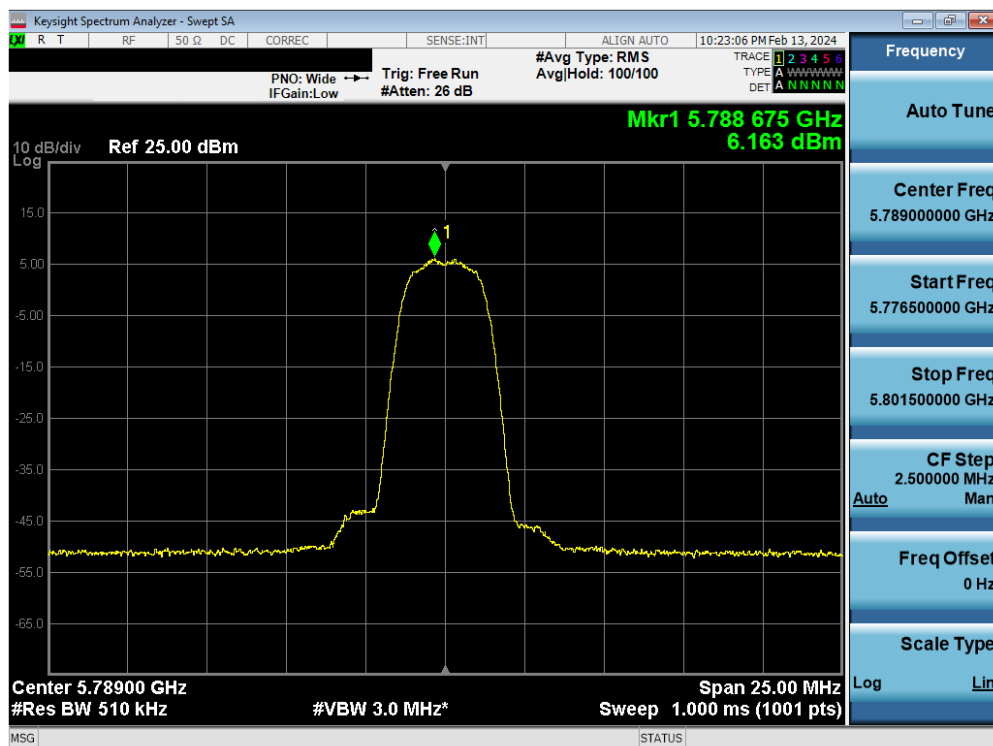


Plot 7-56. PSD Antenna 5b (HDR4, ePA 5789MHz)

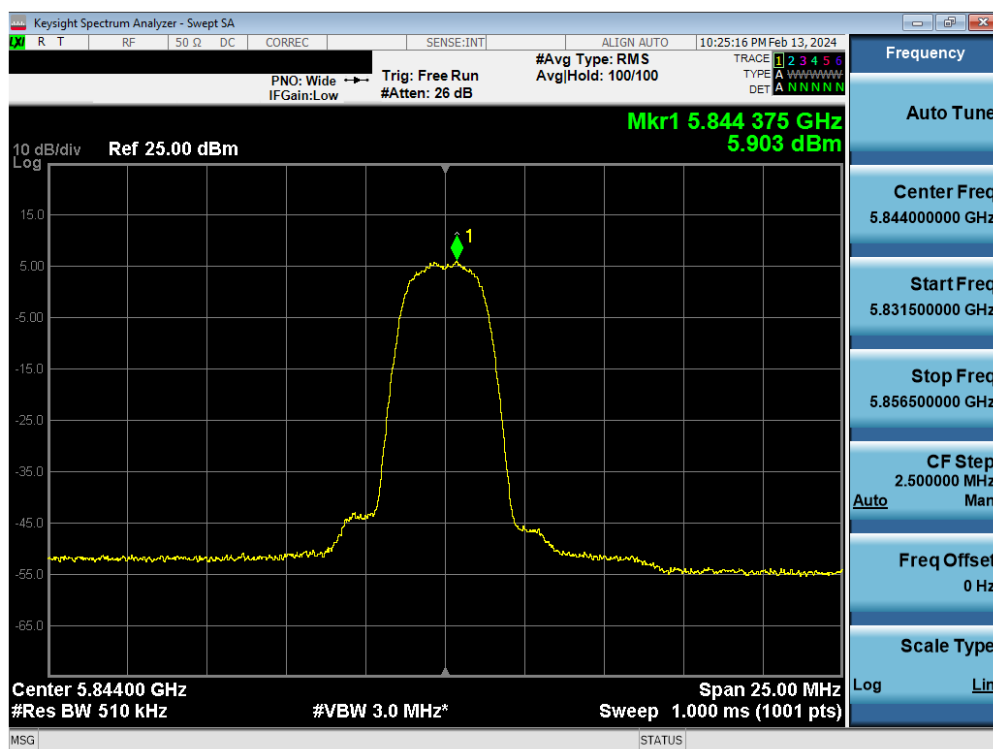


Plot 7-57. PSD Antenna 5b (HDR4, ePA 5844MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 63 of 176                    |

V 10.5 12/15/2021

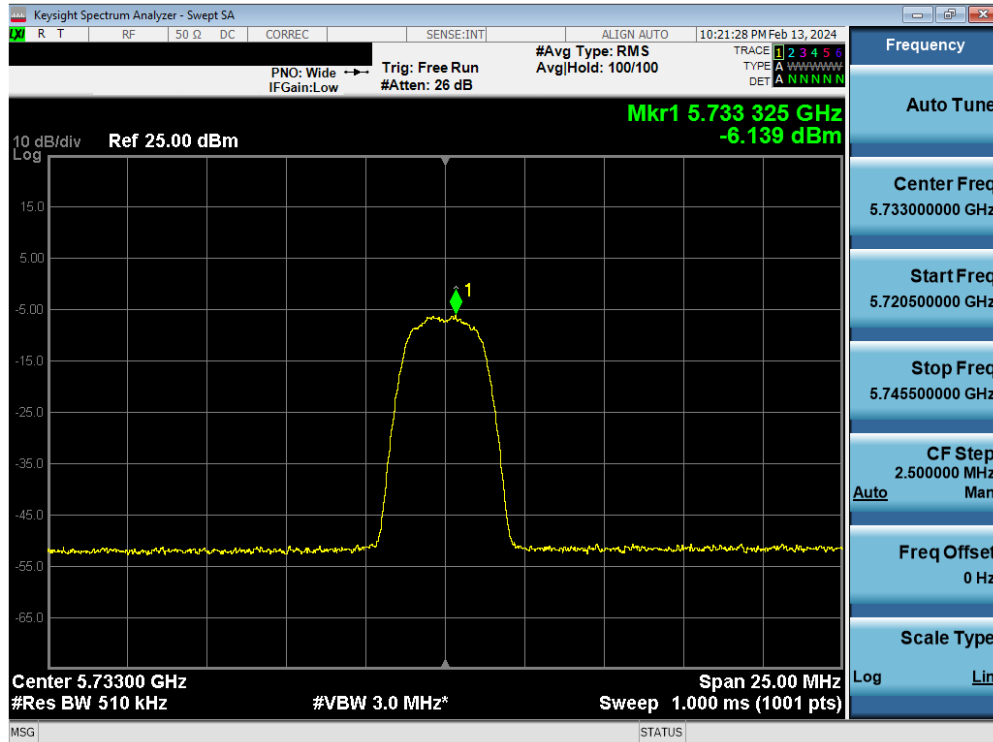


Plot 7-58. PSD Antenna 5b (HDR4, iPA 5733MHz)

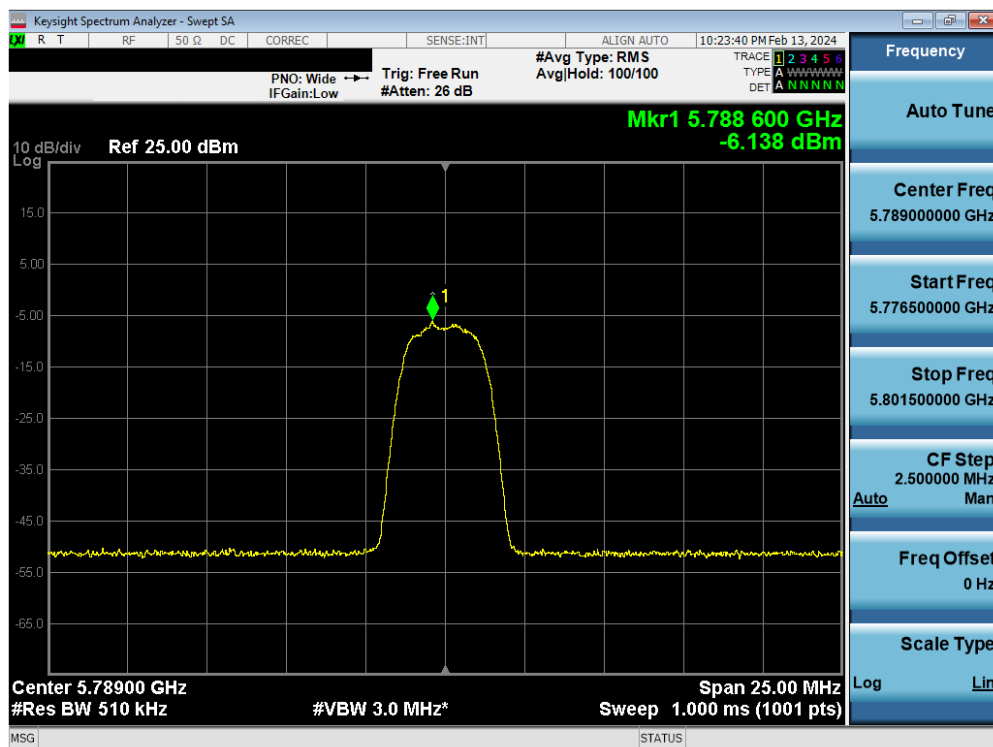


Plot 7-59. PSD Antenna 5b (HDR4, iPA 5789MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 64 of 176                    |

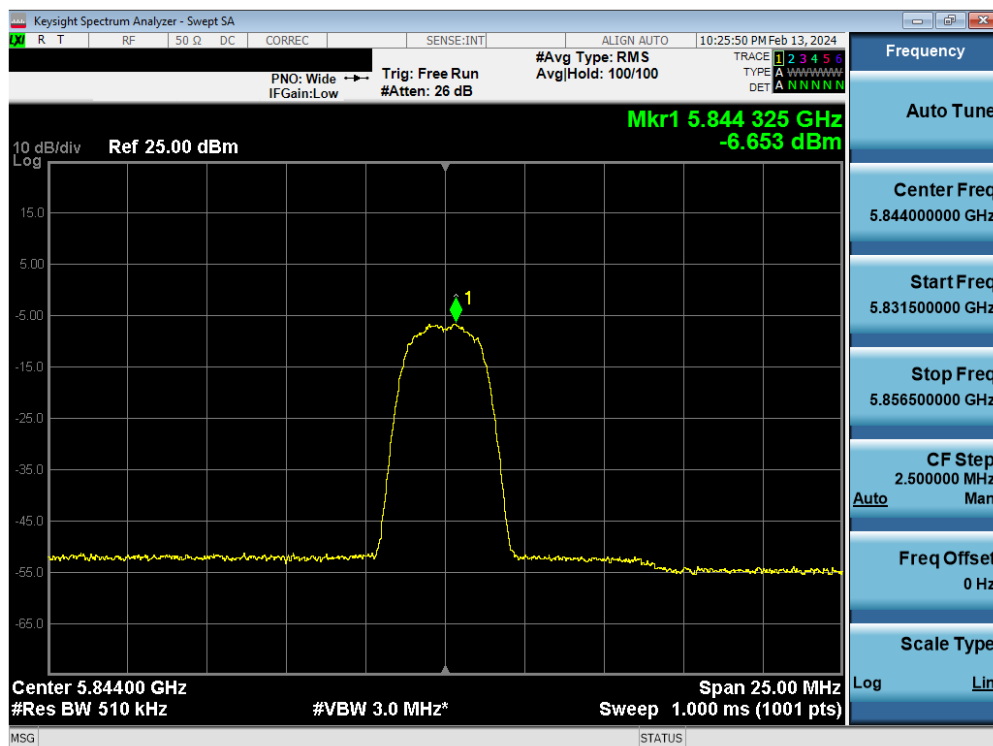

Plot 7-60. PSD Antenna 5b (HDR4, iPA 5844MHz)

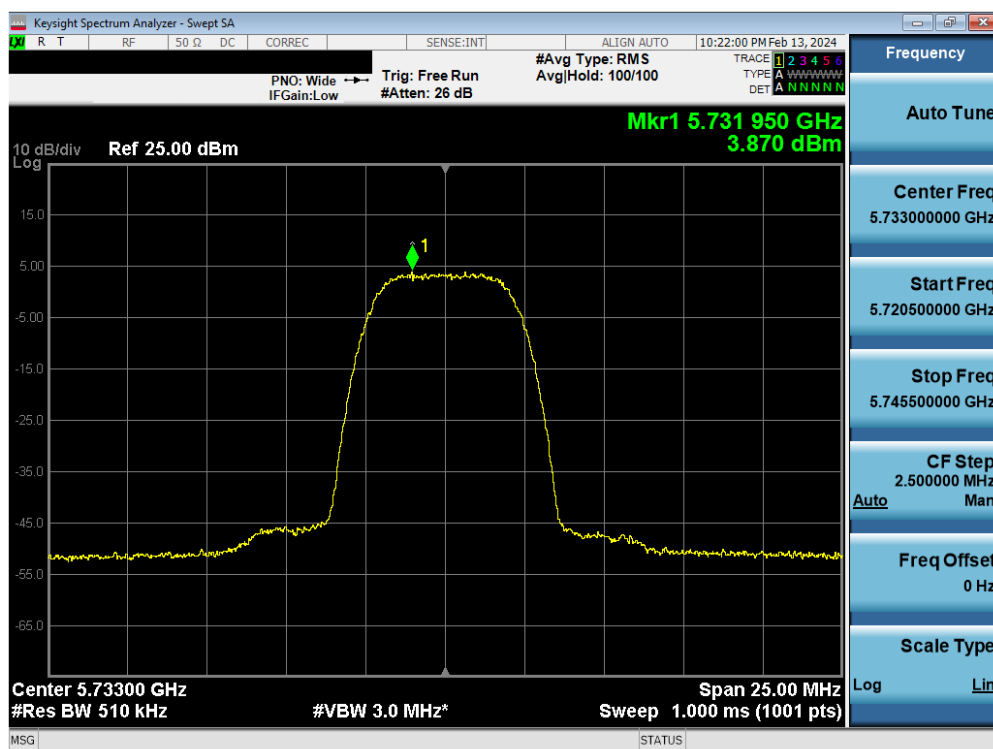


Plot 7-61. PSD Antenna 5b (HDR8, ePA 5733MHz)


|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 65 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

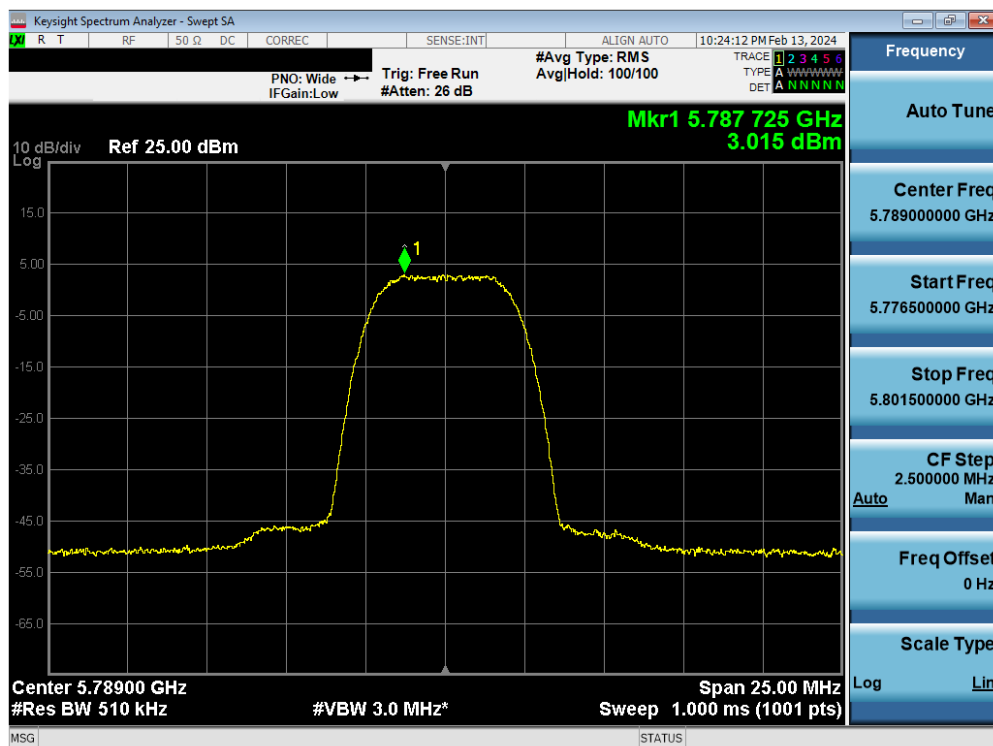


Plot 7-62. PSD Antenna 5b (HDR8, ePA 5789MHz)

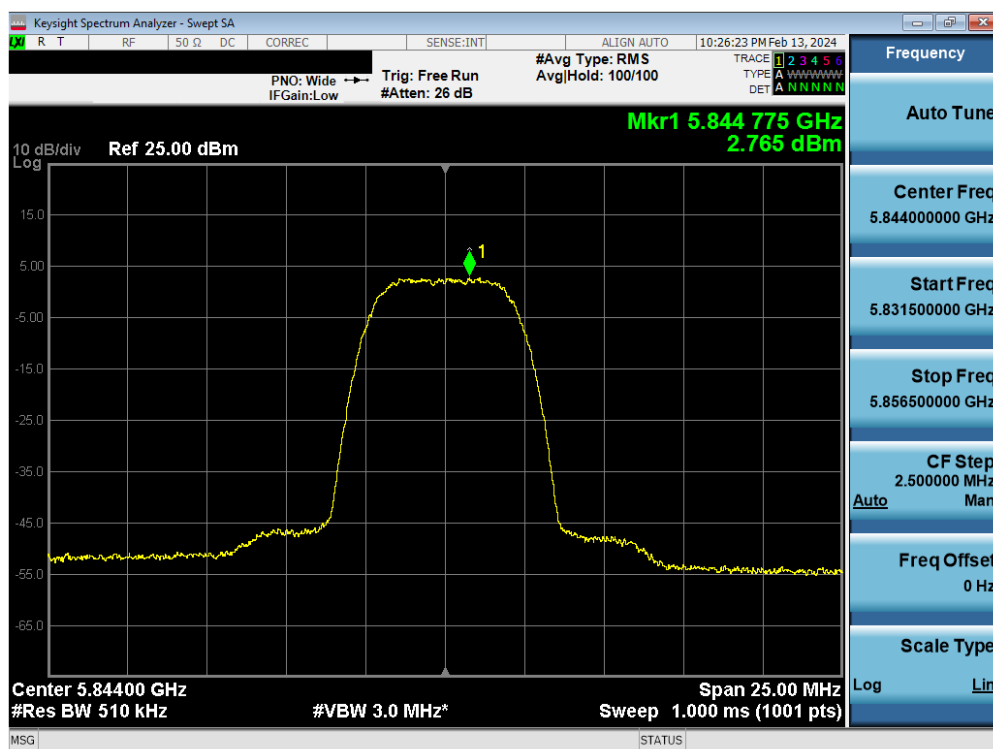


Plot 7-63. PSD Antenna 5b (HDR8, ePA 5844MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 66 of 176                    |

V 10.5 12/15/2021

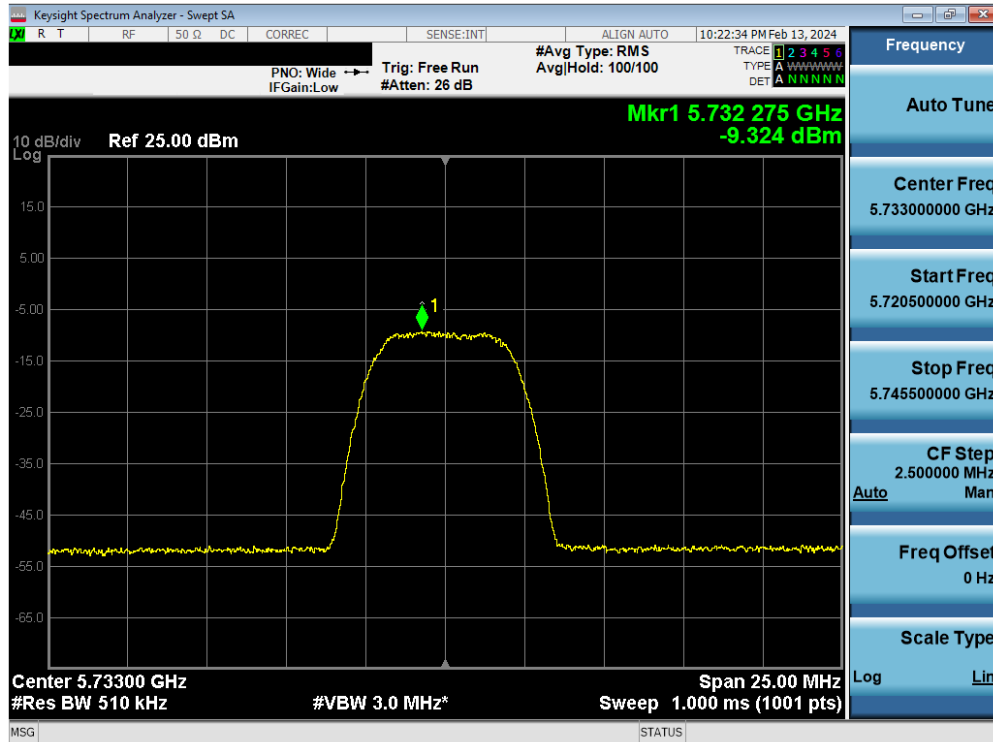

Plot 7-64. PSD Antenna 5b (HDR8, iPA 5733MHz)

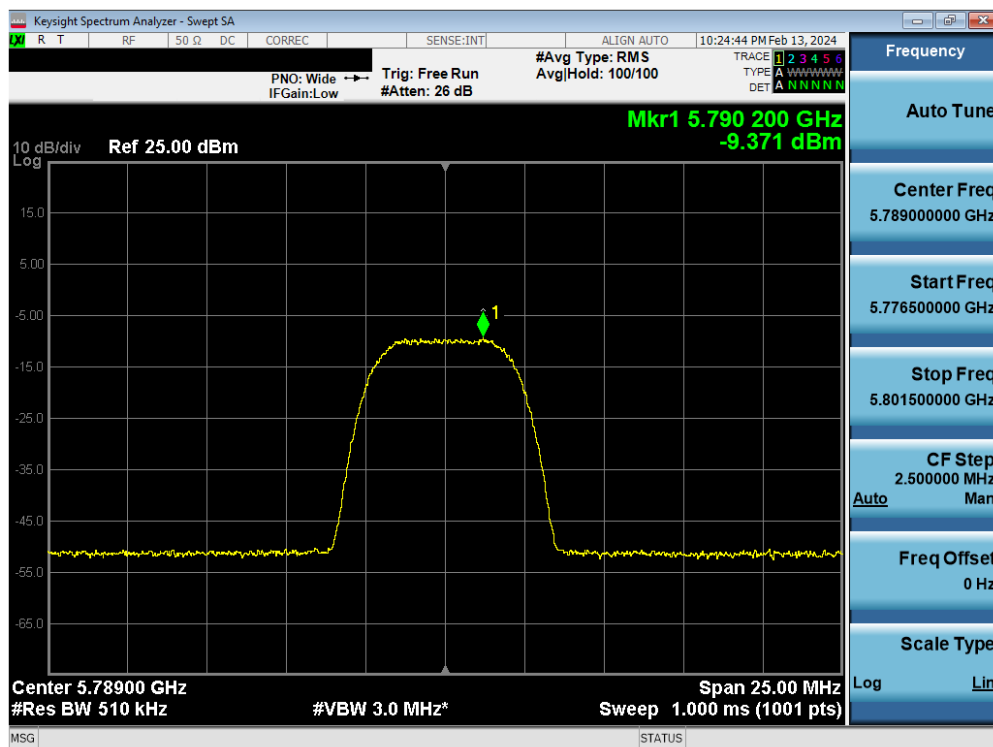


Plot 7-65. PSD Antenna 5b (HDR8, iPA 5789MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 67 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

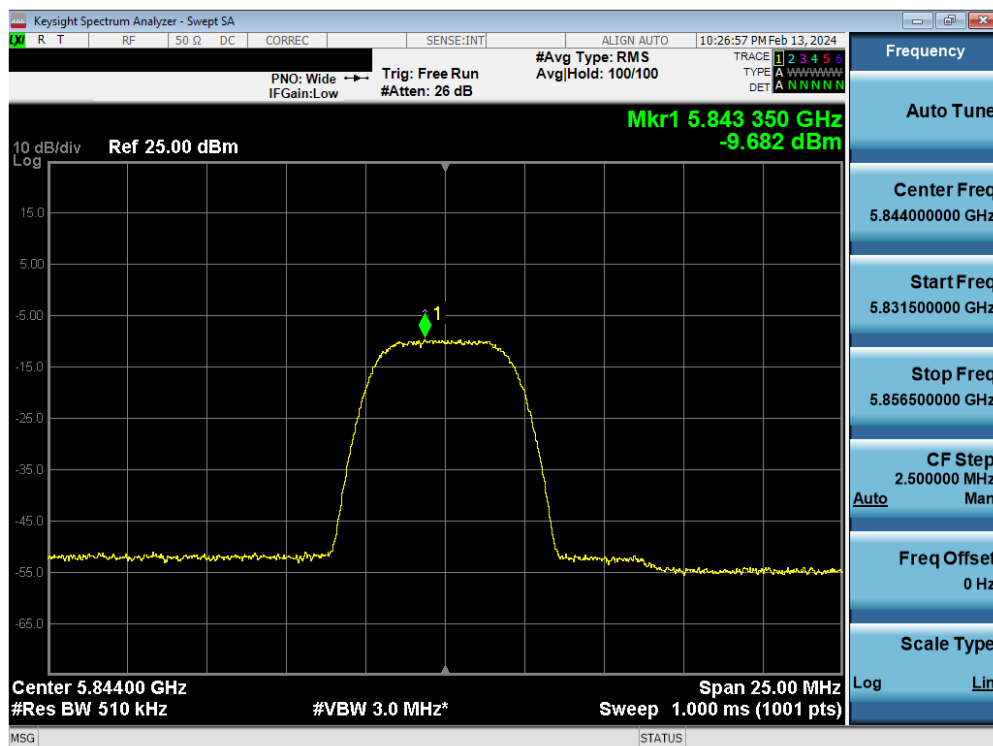

Plot 7-66. PSD Antenna 5b (HDR8, iPA 5844MHz)

|                                         |                                                                                                                                   |                            |                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                             | EUT Type:<br>Tablet Device | Page 68 of 176                    |

V 10.5 12/15/2021

## 7.5.2 Antenna 4a Power Spectral Density Measurements

|        | Frequency [MHz] | Data Rate [Mbps] | Mode | Power Scheme | Measured Power Density [dBm/MHz] | Max Power Density [dBm/MHz] | Margin [dB] |
|--------|-----------------|------------------|------|--------------|----------------------------------|-----------------------------|-------------|
| Band 1 | 5162            | 4.0              | HDR4 | ePA          | 5.60                             | 11.00                       | -5.40       |
|        | 5204            | 4.0              | HDR4 | ePA          | 5.53                             | 11.00                       | -5.47       |
|        | 5245            | 4.0              | HDR4 | ePA          | 5.44                             | 11.00                       | -5.56       |
|        | 5162            | 4.0              | HDR4 | iPA          | -1.87                            | 11.00                       | -12.87      |
|        | 5204            | 4.0              | HDR4 | iPA          | -1.82                            | 11.00                       | -12.82      |
|        | 5245            | 4.0              | HDR4 | iPA          | -1.39                            | 11.00                       | -12.39      |
|        | 5162            | 8.0              | HDR8 | ePA          | 3.46                             | 11.00                       | -7.54       |
|        | 5204            | 8.0              | HDR8 | ePA          | 2.90                             | 11.00                       | -8.10       |
|        | 5245            | 8.0              | HDR8 | ePA          | 2.53                             | 11.00                       | -8.47       |
|        | 5162            | 8.0              | HDR8 | iPA          | -4.51                            | 11.00                       | -15.51      |
|        | 5204            | 8.0              | HDR8 | iPA          | -3.87                            | 11.00                       | -14.87      |
|        | 5245            | 8.0              | HDR8 | iPA          | -3.89                            | 11.00                       | -14.89      |


Table 7-19. FCC Power Spectral Density Measurements Antenna 4a

|        | Frequency [MHz] | Data Rate [Mbps] | Mode | Power Scheme | Measured Power Density [dBm/MHz] | Antenna Gain [dBi] | e.i.r.p. Power Density [dBm/MHz] | ISED Max e.i.r.p. Power Density [dBm/MHz] | Margin [dB] |
|--------|-----------------|------------------|------|--------------|----------------------------------|--------------------|----------------------------------|-------------------------------------------|-------------|
| Band 1 | 5162            | 4.0              | HDR4 | ePA          | 5.60                             | -0.30              | 5.30                             | 10.00                                     | -4.70       |
|        | 5204            | 4.0              | HDR4 | ePA          | 5.53                             | -0.30              | 5.23                             | 10.00                                     | -4.77       |
|        | 5245            | 4.0              | HDR4 | ePA          | 5.44                             | -0.30              | 5.14                             | 10.00                                     | -4.86       |
|        | 5162            | 4.0              | HDR4 | iPA          | -1.87                            | -0.30              | -2.17                            | 10.00                                     | -12.17      |
|        | 5204            | 4.0              | HDR4 | iPA          | -1.82                            | -0.30              | -2.12                            | 10.00                                     | -12.12      |
|        | 5245            | 4.0              | HDR4 | iPA          | -1.39                            | -0.30              | -1.69                            | 10.00                                     | -11.69      |
|        | 5162            | 8.0              | HDR8 | ePA          | 3.46                             | -0.30              | 3.16                             | 10.00                                     | -6.84       |
|        | 5204            | 8.0              | HDR8 | ePA          | 2.90                             | -0.30              | 2.60                             | 10.00                                     | -7.40       |
|        | 5245            | 8.0              | HDR8 | ePA          | 2.53                             | -0.30              | 2.23                             | 10.00                                     | -7.77       |
|        | 5162            | 8.0              | HDR8 | iPA          | -4.51                            | -0.30              | -4.81                            | 10.00                                     | -14.81      |
|        | 5204            | 8.0              | HDR8 | iPA          | -3.87                            | -0.30              | -4.17                            | 10.00                                     | -14.17      |
|        | 5245            | 8.0              | HDR8 | iPA          | -3.89                            | -0.30              | -4.19                            | 10.00                                     | -14.19      |


Table 7-20. ISED Power Spectral Density Measurements Antenna 4a

|                                         |                                                                                                                                   |                            |                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                             | EUT Type:<br>Tablet Device | Page 69 of 176                    |

V 10.5 12/15/2021

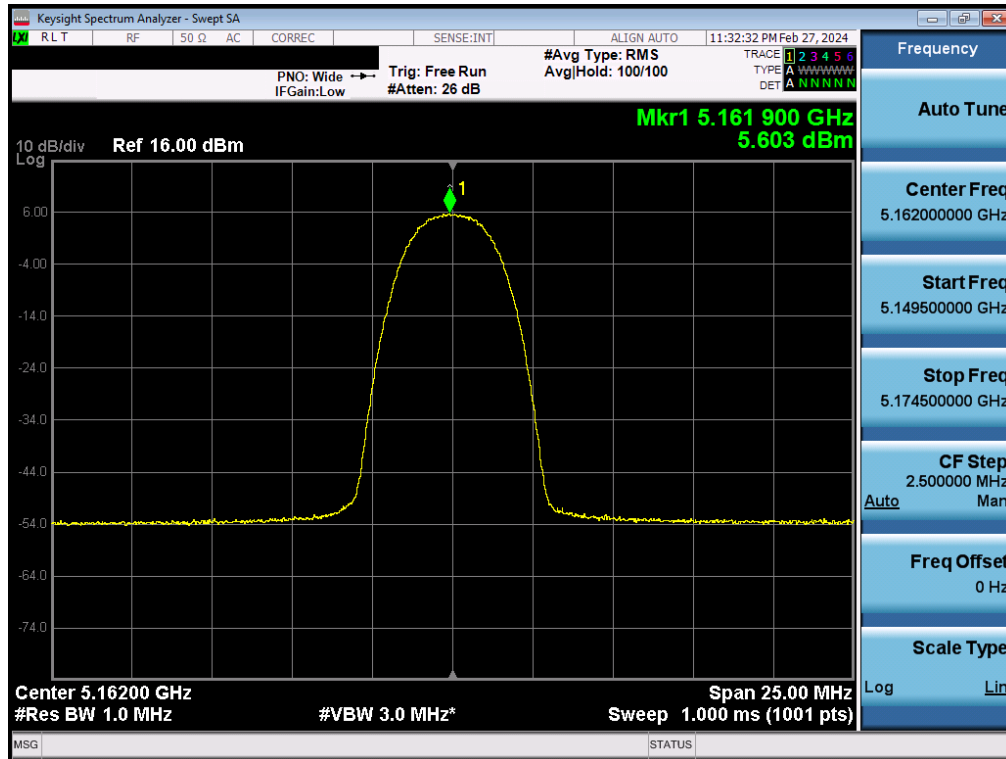


Plot 7-67. PSD Antenna 4a (HDR4, ePA – 5162MHz)

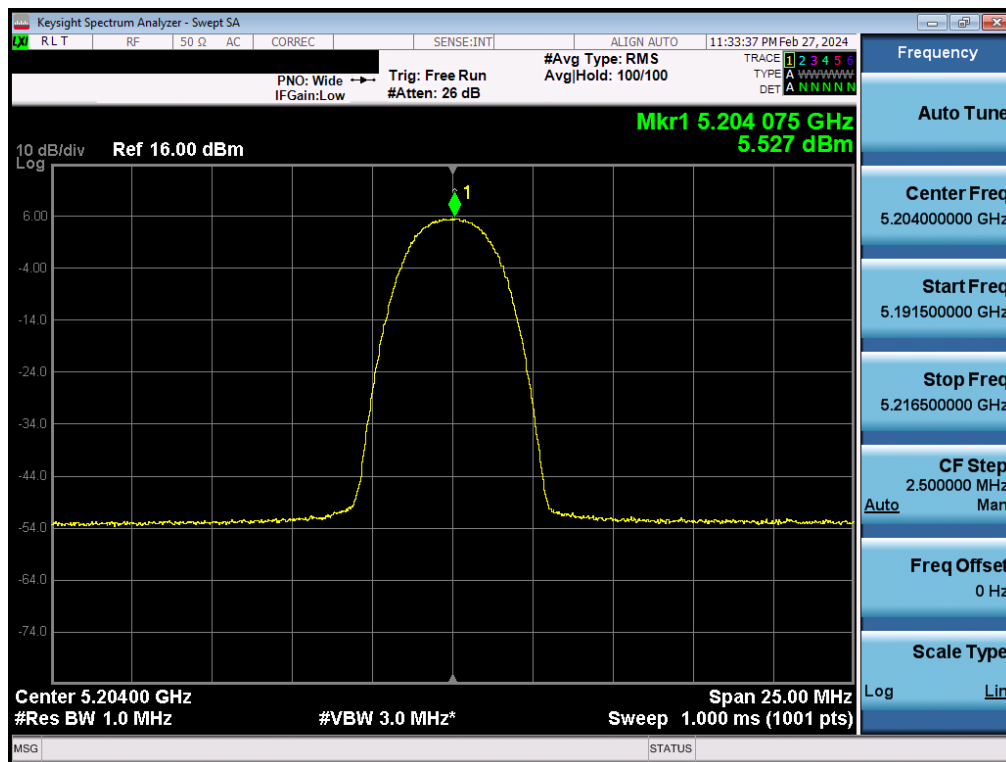


Plot 7-68. PSD Antenna 4a (HDR4, ePA – 5204MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 70 of 176                    |

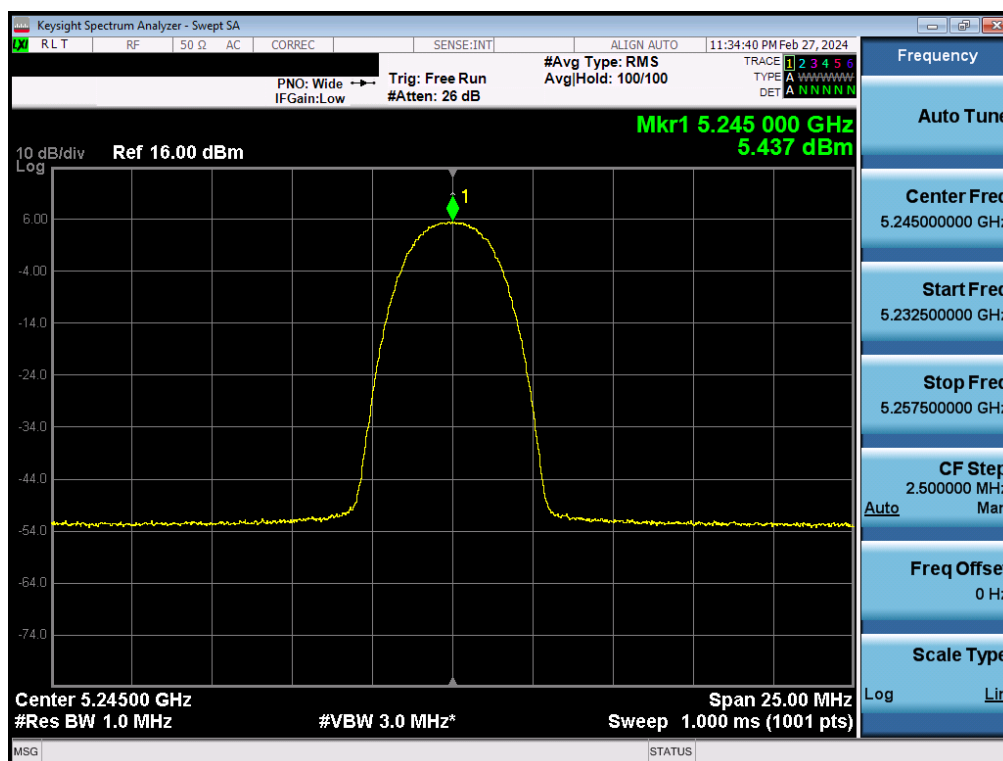

Plot 7-69. PSD Antenna 4a (HDR4, ePA– 5245MHz)

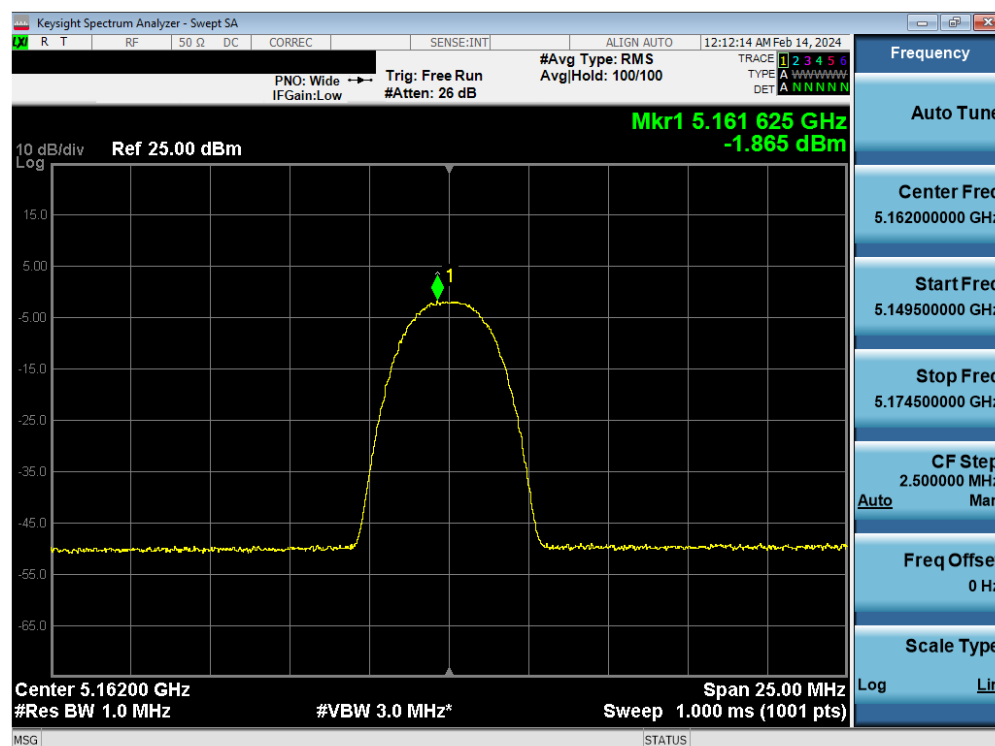


Plot 7-70. PSD Antenna 4a (HDR4, iPA – 5162MHz)


|                                         |                                                                                                                                   |                            |                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                             | EUT Type:<br>Tablet Device | Page 71 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

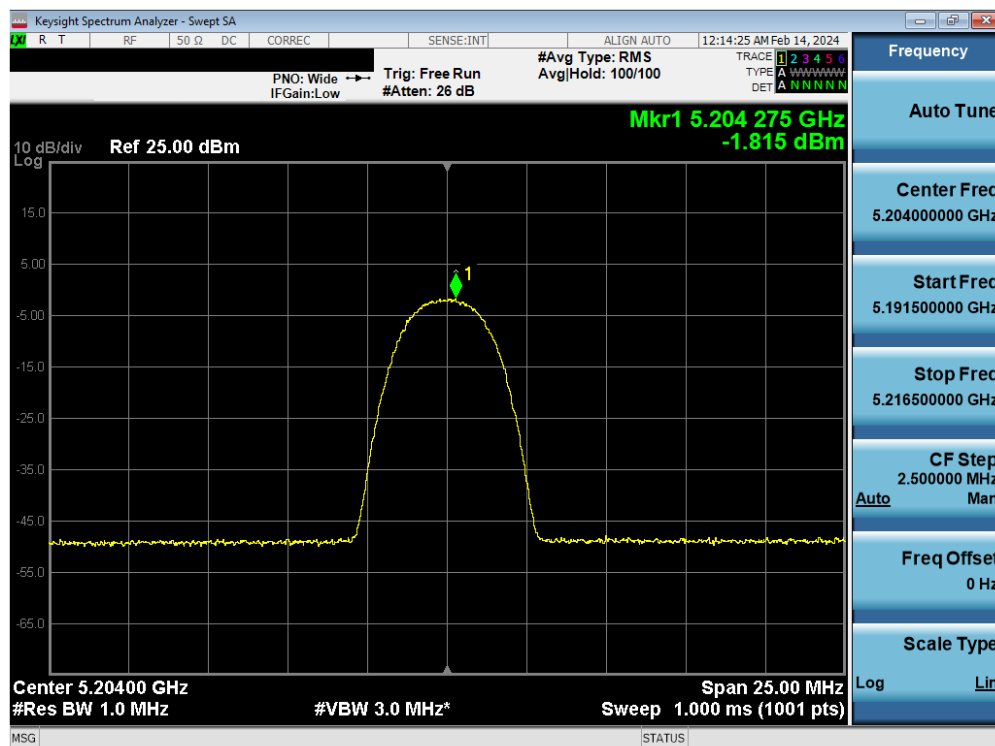


Plot 7-71. PSD Antenna 4a (HDR4, iPA – 5204MHz)

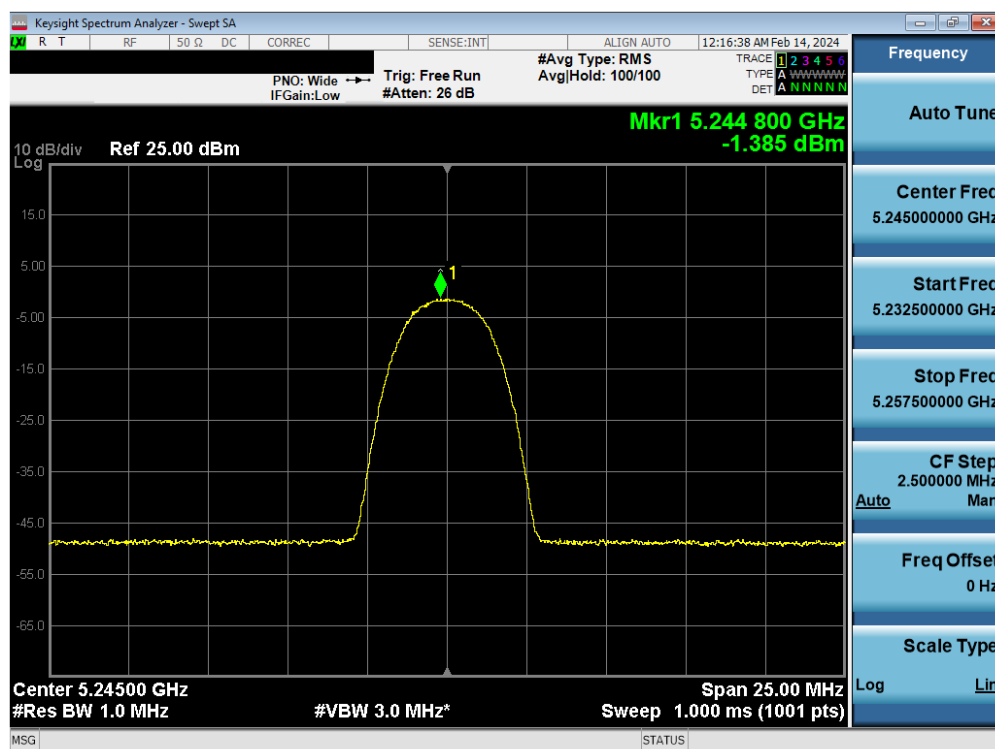


Plot 7-72. PSD Antenna 4a (HDR4, iPA– 5245MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 72 of 176                    |

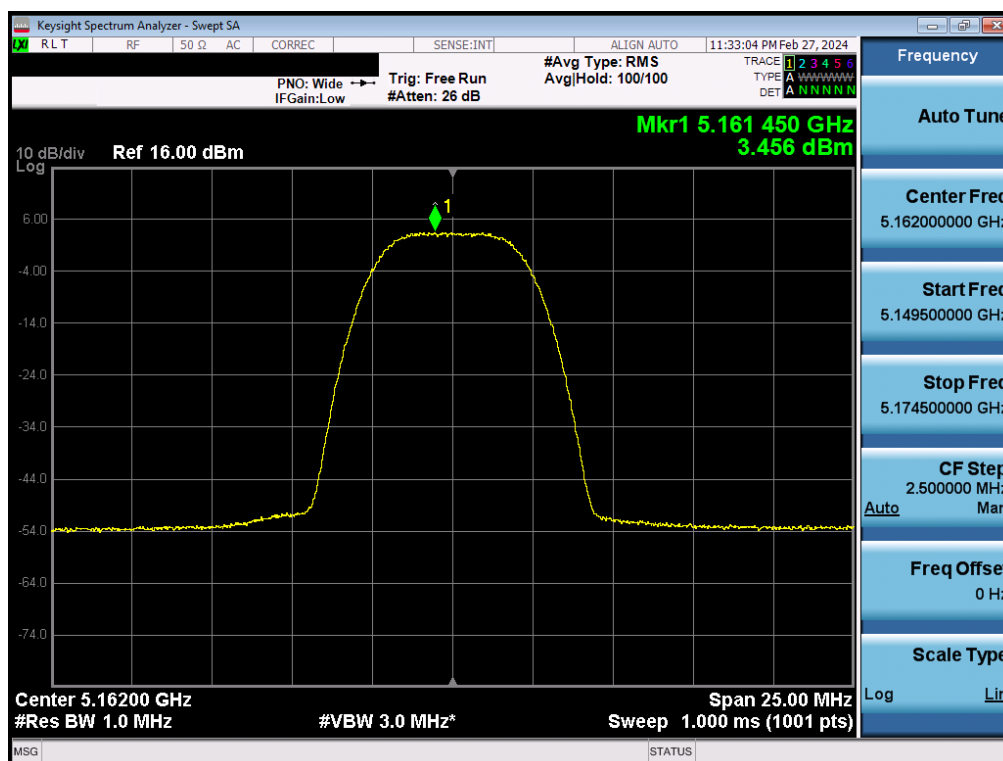

Plot 7-73. PSD Antenna 4a (HDR8, ePA – 5162MHz)

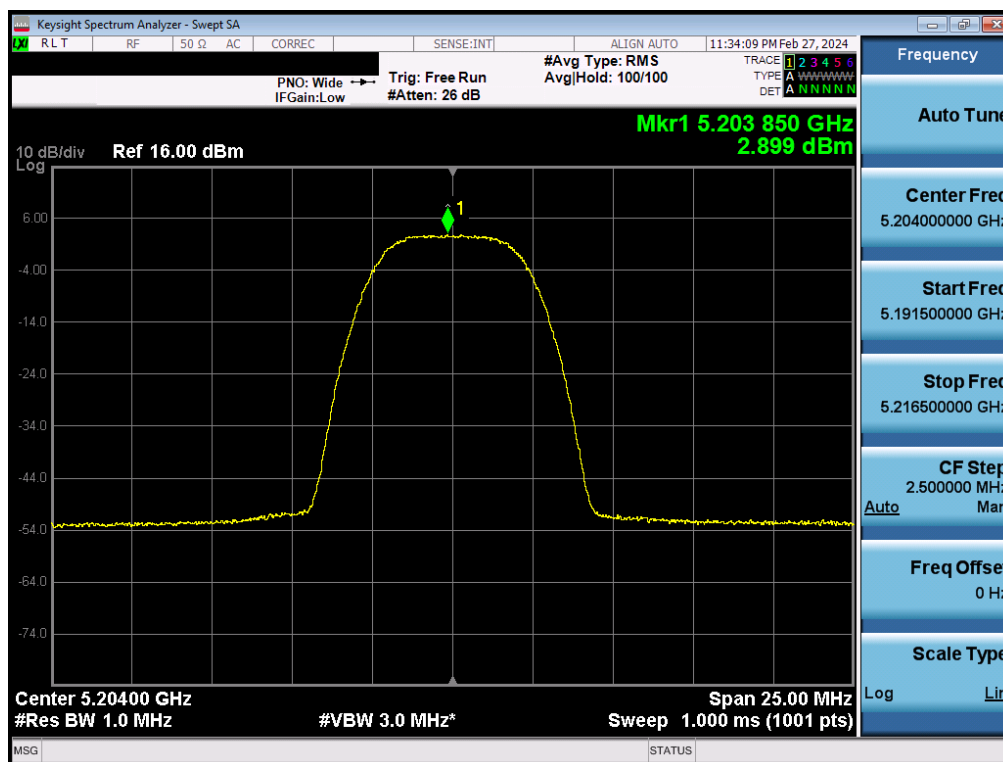


Plot 7-74. PSD Antenna 4a (HDR8, ePA – 5204MHz)


|                                         |                                                                                                                                   |                            |                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                             | EUT Type:<br>Tablet Device | Page 73 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

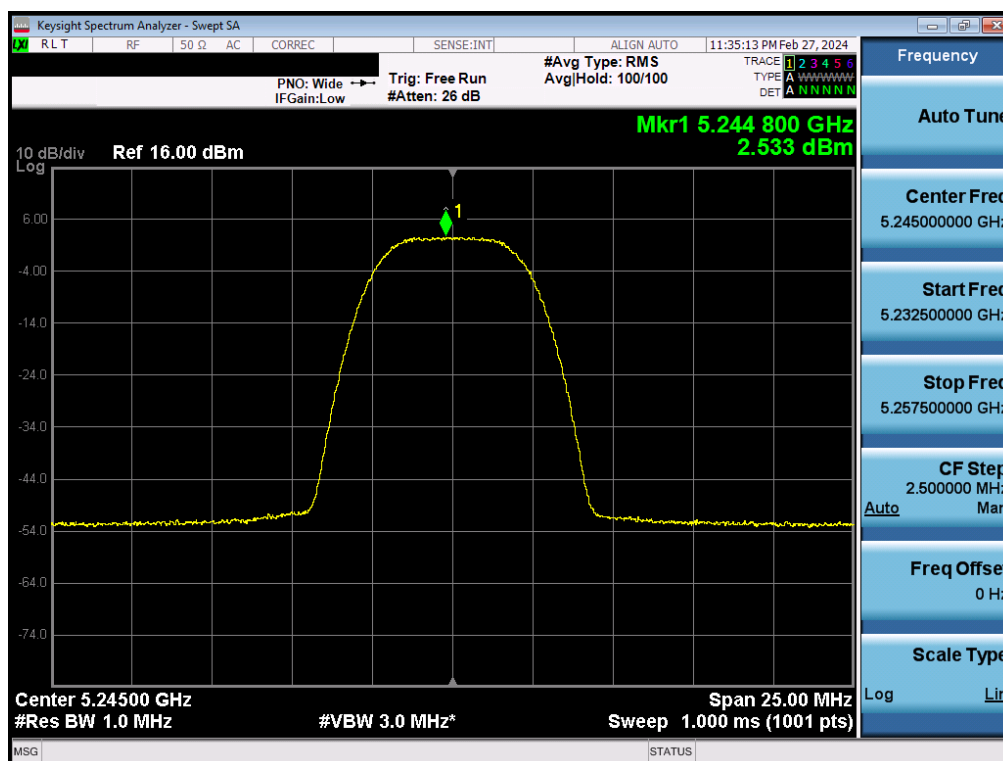

Plot 7-75. PSD Antenna 4a (HDR8, ePA– 5245MHz)

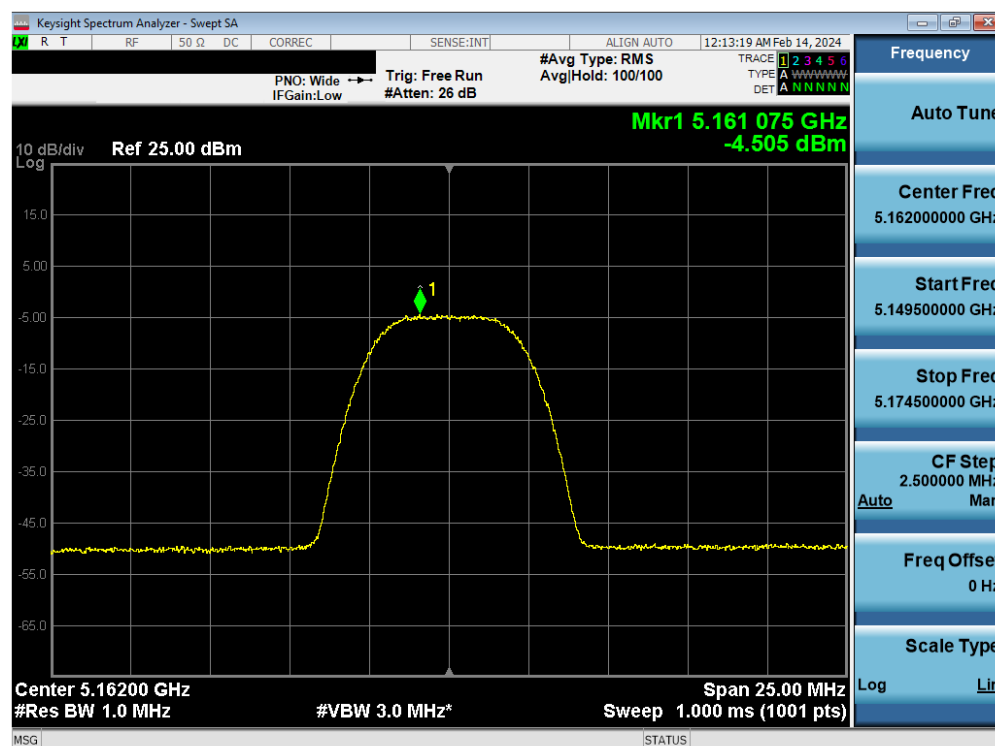


Plot 7-76. PSD Antenna 4a (HDR8, iPA – 5162MHz)


|                                         |                                                                                                                                  |                            |                                   |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                            | EUT Type:<br>Tablet Device | Page 74 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

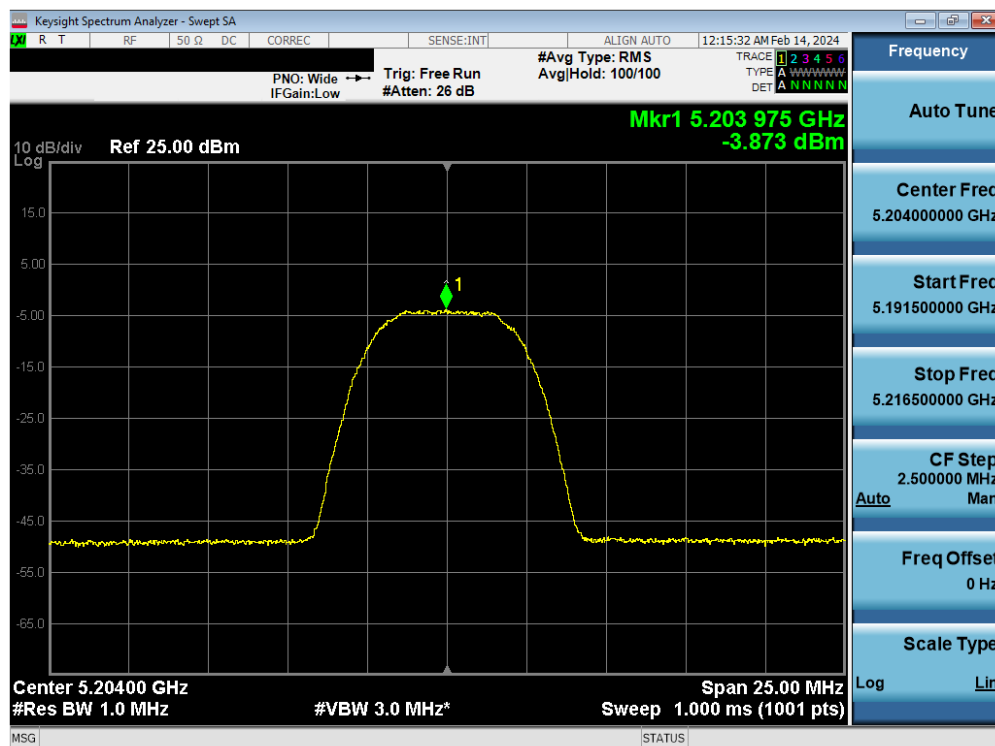

Plot 7-77. PSD Antenna 4a (HDR8, iPA – 5204MHz)

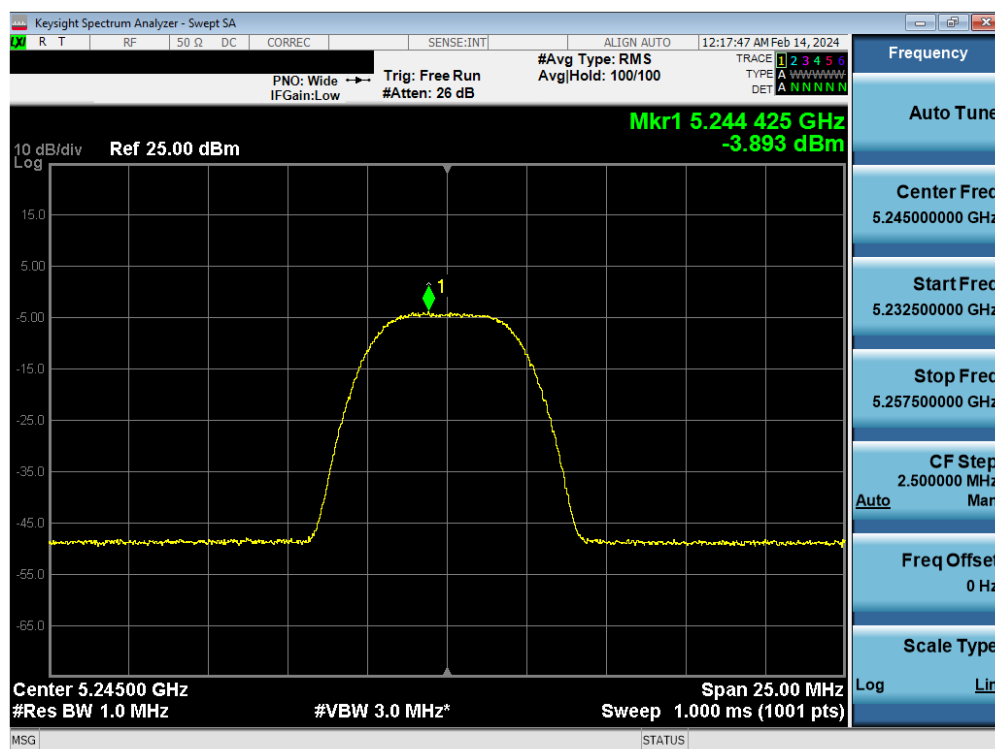

Plot 7-78. PSD Antenna 4a (HDR8, iPA– 5245MHz)


|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 75 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).


|        | Frequency [MHz] | Data Rate [Mbps] | Mode | Power Scheme | Measured Power Density [dBm/500kHz] | Max Permissible Power Density [dBm/500kHz] | Margin [dB] |
|--------|-----------------|------------------|------|--------------|-------------------------------------|--------------------------------------------|-------------|
| Band 3 | 5733            | 4.0              | HDR4 | ePA          | 4.09                                | 30.00                                      | -25.91      |
|        | 5789            | 4.0              | HDR4 | ePA          | 5.00                                | 30.00                                      | -25.00      |
|        | 5844            | 4.0              | HDR4 | ePA          | 4.52                                | 30.00                                      | -25.48      |
|        | 5733            | 4.0              | HDR4 | iPA          | -2.73                               | 30.00                                      | -32.73      |
|        | 5789            | 4.0              | HDR4 | iPA          | -3.31                               | 30.00                                      | -33.31      |
|        | 5844            | 4.0              | HDR4 | iPA          | -3.11                               | 30.00                                      | -33.11      |
|        | 5733            | 8.0              | HDR8 | ePA          | 1.62                                | 30.00                                      | -28.38      |
|        | 5789            | 8.0              | HDR8 | ePA          | 1.58                                | 30.00                                      | -28.42      |
|        | 5844            | 8.0              | HDR8 | ePA          | 1.51                                | 30.00                                      | -28.50      |
|        | 5733            | 8.0              | HDR8 | iPA          | -5.84                               | 30.00                                      | -35.84      |
|        | 5789            | 8.0              | HDR8 | iPA          | -6.51                               | 30.00                                      | -36.51      |
|        | 5844            | 8.0              | HDR8 | iPA          | -6.49                               | 30.00                                      | -36.49      |

Table 7-21. Power Spectral Density Measurements Antenna 4a

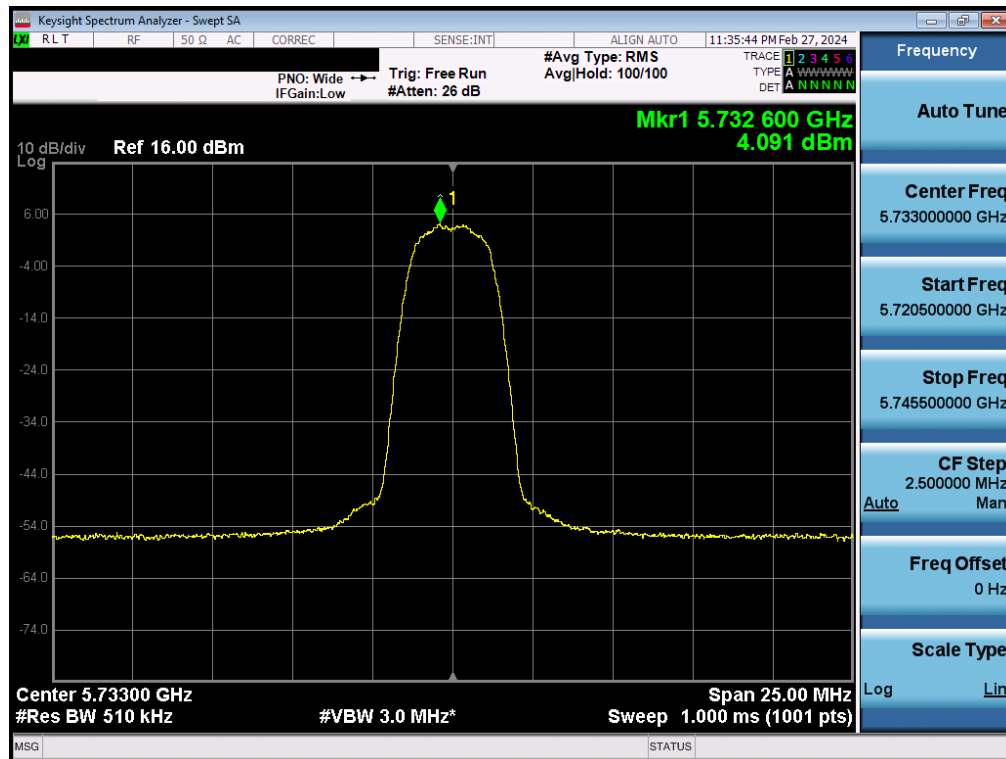


Plot 7-79. PSD Antenna 4a (HDR4, ePA 5733MHz)

|                                         |                                                                                                                                  |                            |                                   |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                            | EUT Type:<br>Tablet Device | Page 76 of 176                    |

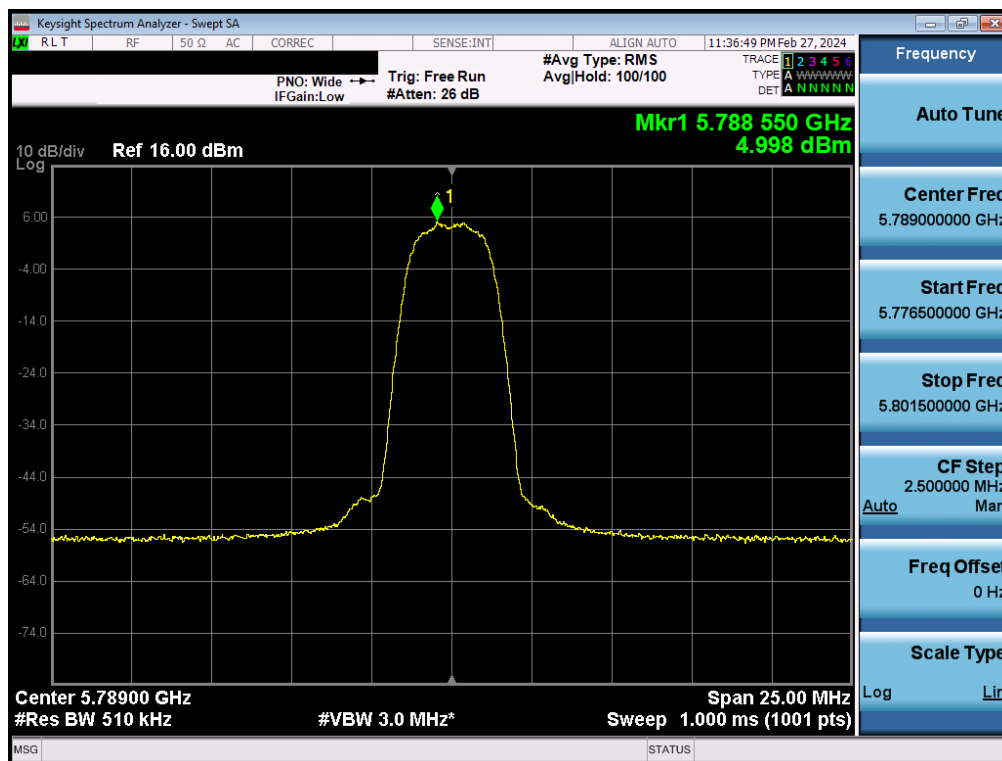

Plot 7-80. PSD Antenna 4a (HDR4, ePA 5789MHz)

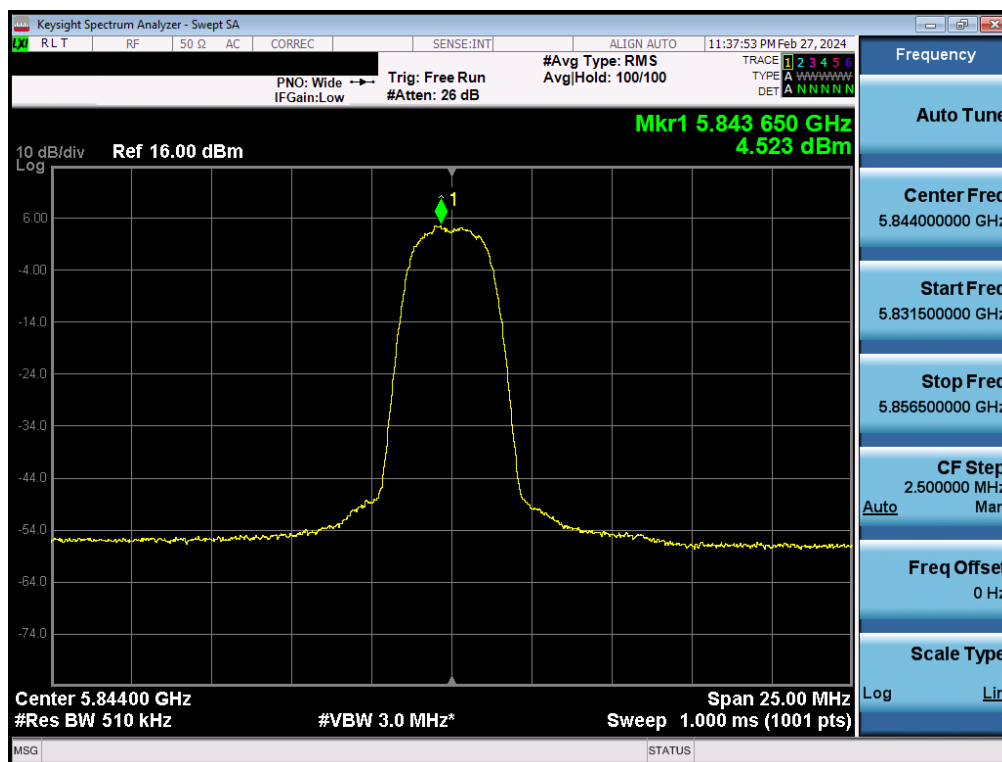


Plot 7-81. PSD Antenna 4a (HDR4, ePA 5844MHz)


|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 77 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

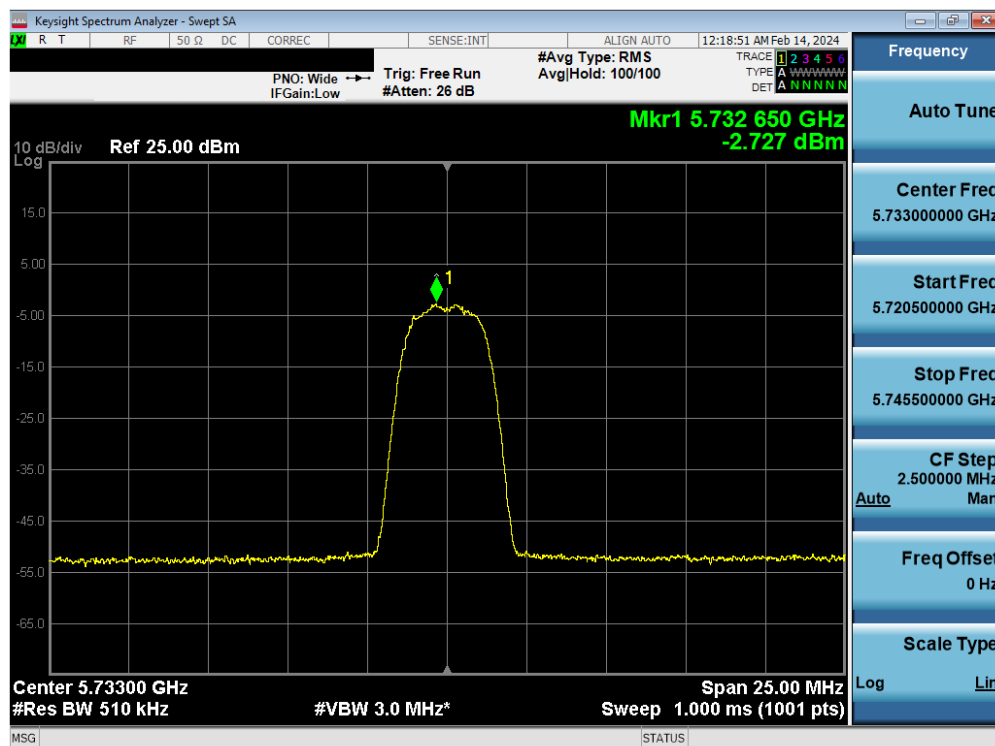


Plot 7-82. PSD Antenna 4a (HDR4, iPA 5733MHz)

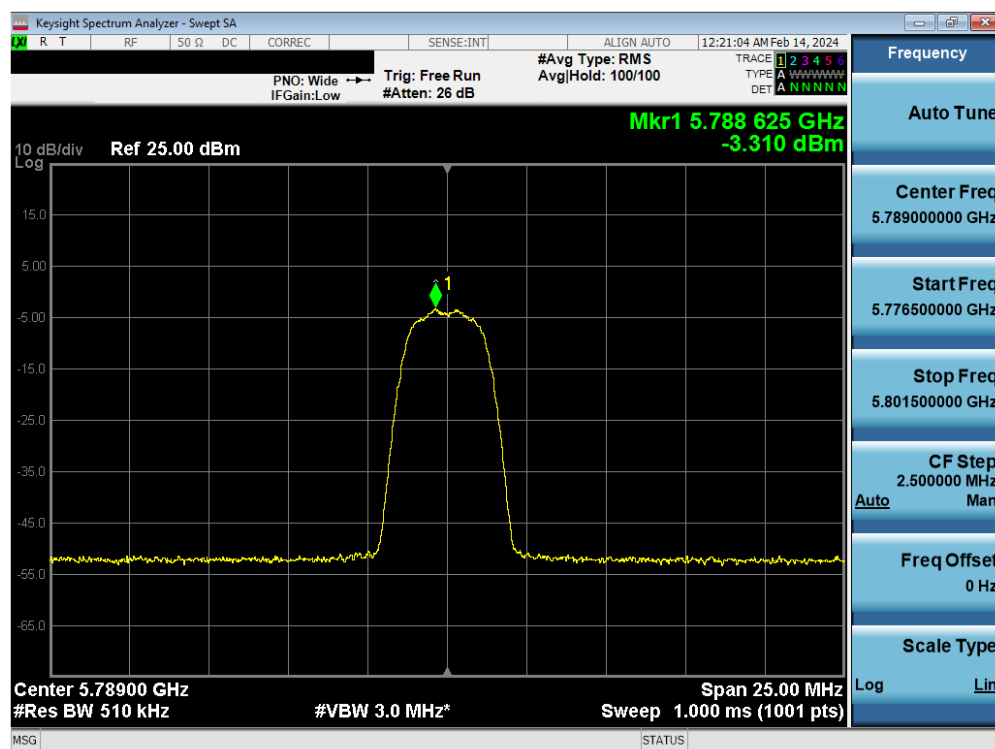


Plot 7-83. PSD Antenna 4a (HDR4, iPA 5789MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 78 of 176                    |

V 10.5 12/15/2021

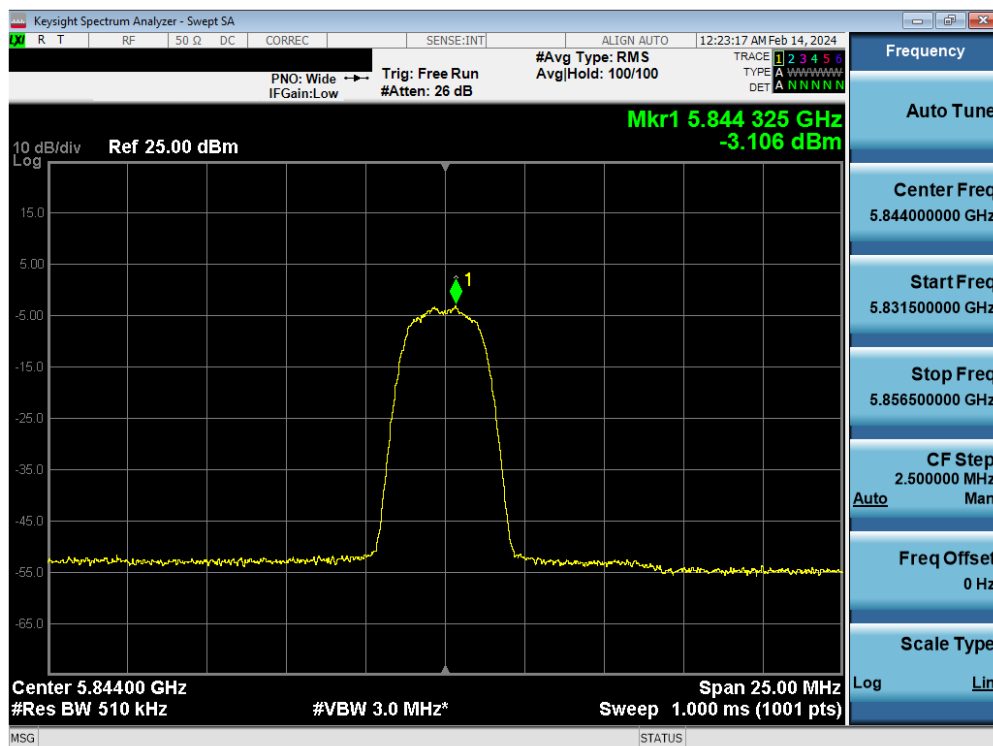

Plot 7-84. PSD Antenna 4a (HDR4, iPA 5844MHz)

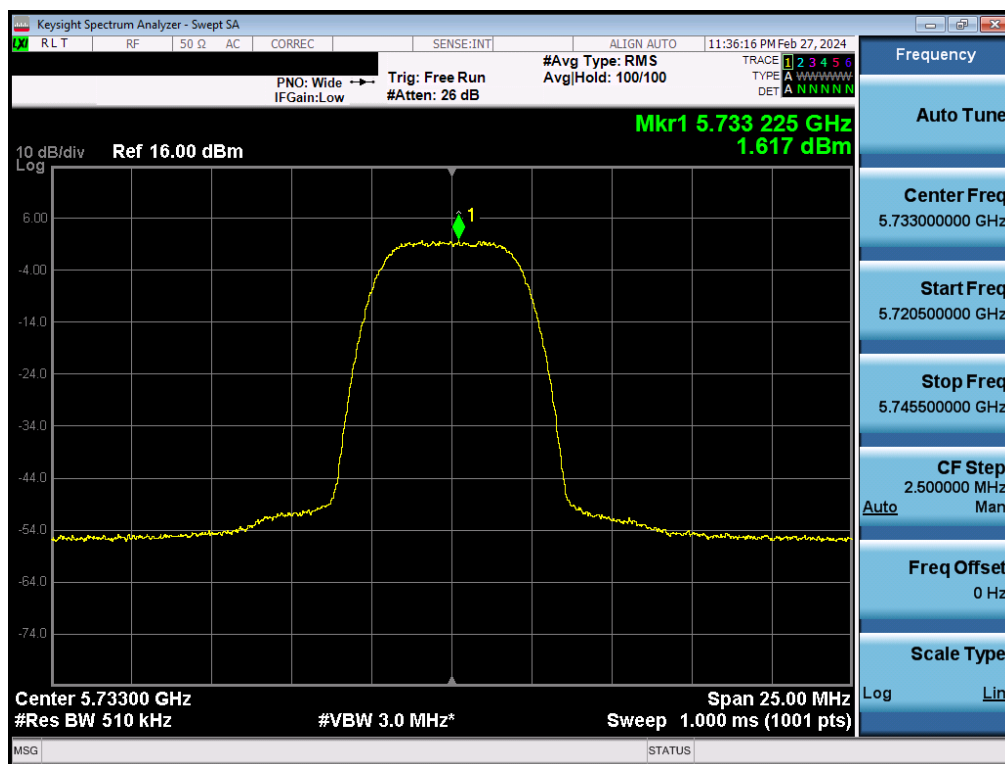


Plot 7-85. PSD Antenna 4a (HDR8, ePA 5733MHz)


|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 79 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

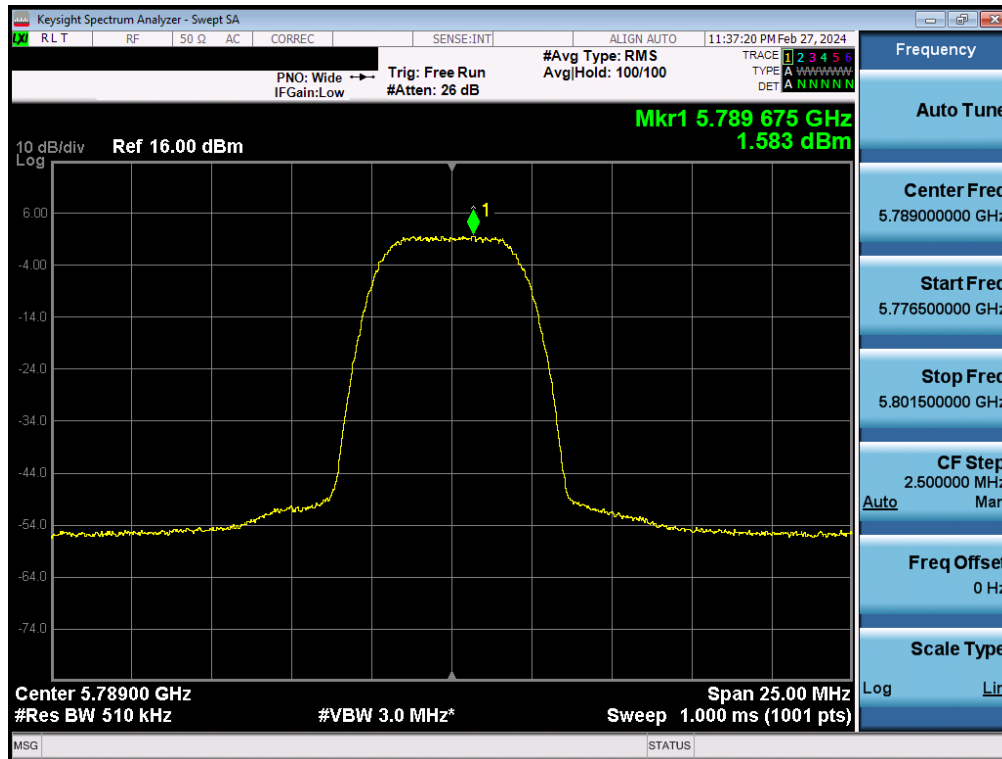


Plot 7-86. PSD Antenna 4a (HDR8, ePA 5789MHz)

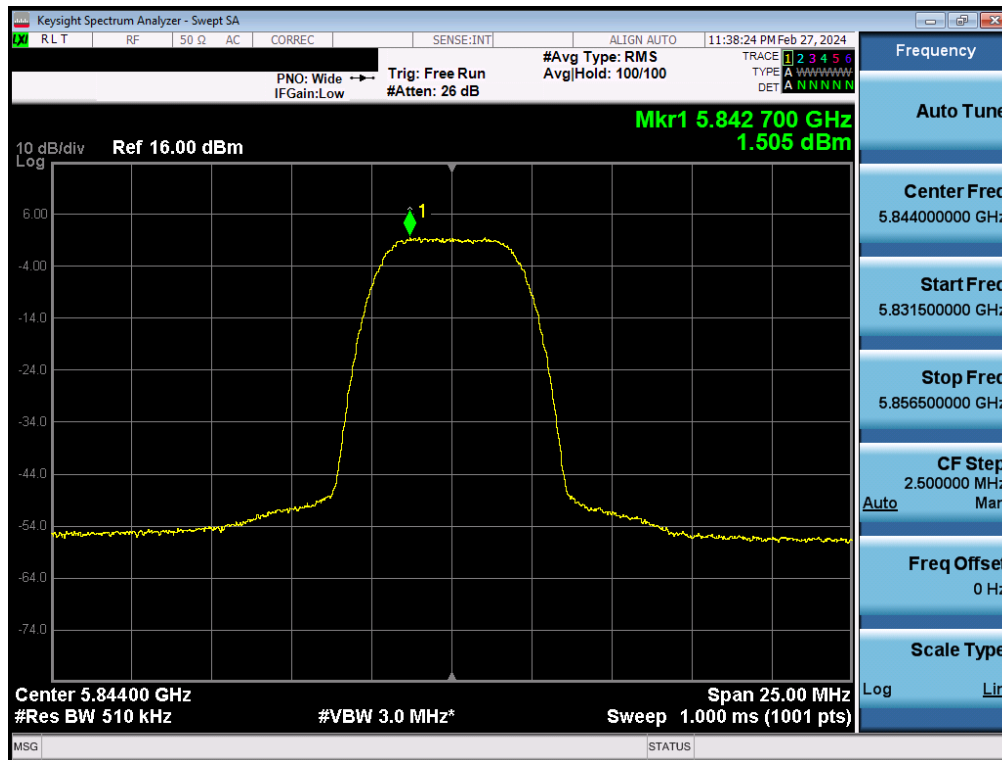


Plot 7-87. PSD Antenna 4a (HDR8, ePA 5844MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 80 of 176                    |

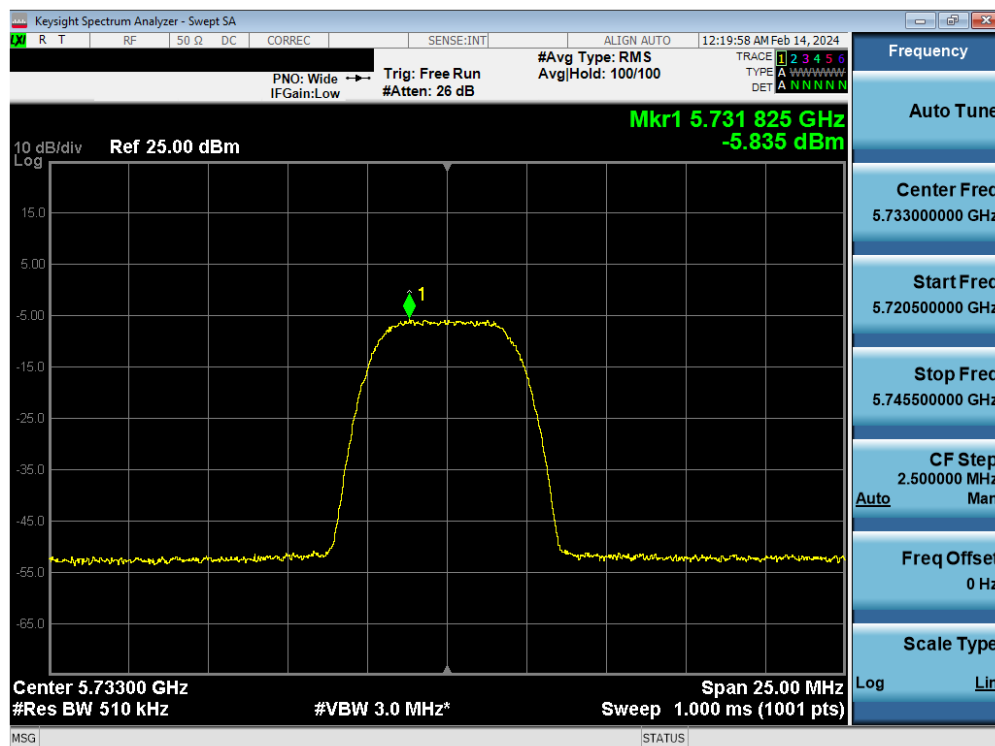


Plot 7-88. PSD Antenna 4a (HDR8, iPA 5733MHz)

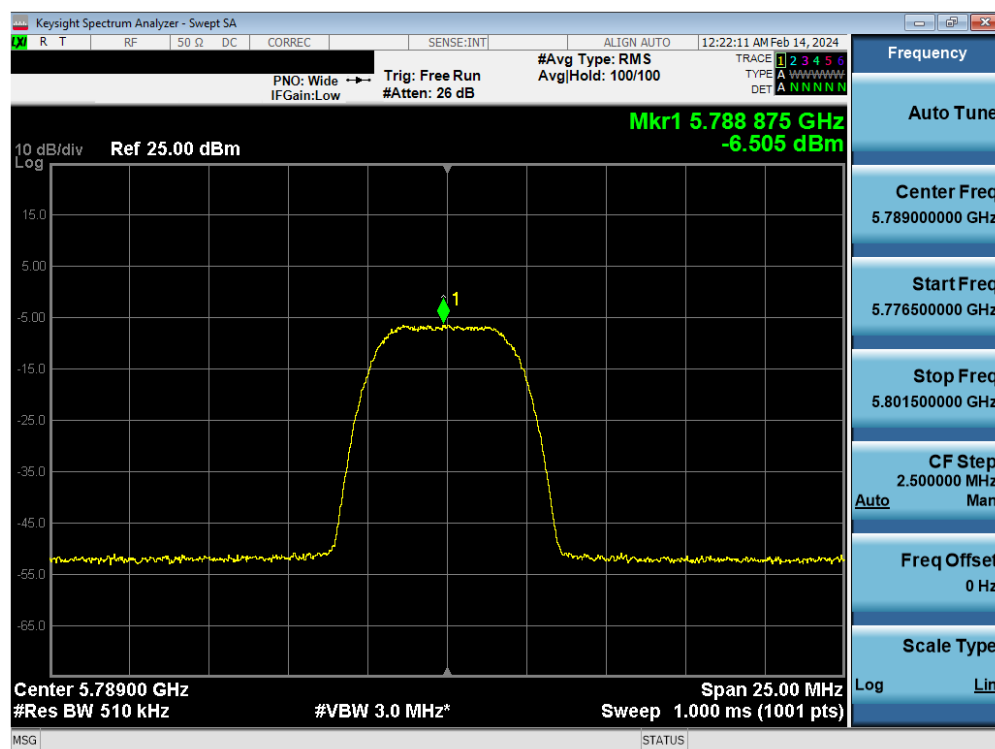

Plot 7-89. PSD Antenna 4a (HDR8, iPA 5789MHz)

|                                         |                                                                                                                                  |                            |                                   |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                            | EUT Type:<br>Tablet Device | Page 81 of 176                    |

V 10.5 12/15/2021

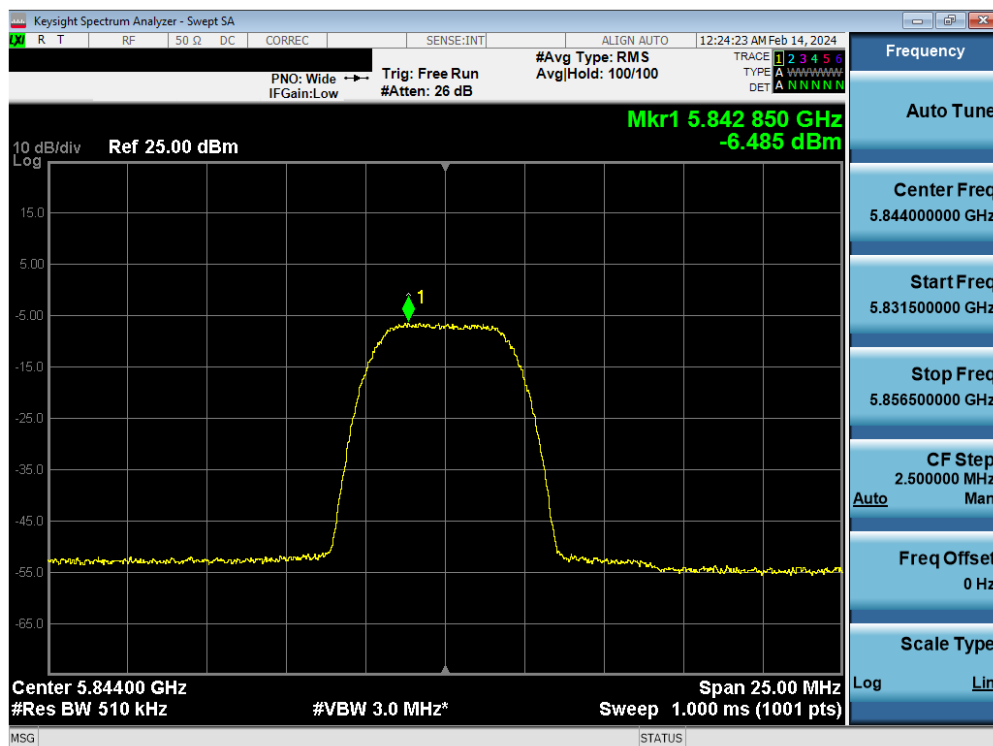

Plot 7-90. PSD Antenna 4a (HDR8, iPA 5844MHz)

|                                         |                                                                                                                                   |                            |                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                             | EUT Type:<br>Tablet Device | Page 82 of 176                    |

V 10.5 12/15/2021

### 7.5.3 Antenna 2a Power Spectral Density Measurements

|        | Frequency [MHz] | Data Rate [Mbps] | Mode | Power Scheme | Measured Power Density [dBm/MHz] | Max Power Density [dBm/MHz] | Margin [dB] |
|--------|-----------------|------------------|------|--------------|----------------------------------|-----------------------------|-------------|
| Band 1 | 5162            | 4.0              | HDR4 | ePA          | 6.96                             | 11.00                       | -4.04       |
|        | 5204            | 4.0              | HDR4 | ePA          | 6.44                             | 11.00                       | -4.56       |
|        | 5245            | 4.0              | HDR4 | ePA          | 6.08                             | 11.00                       | -4.92       |
|        | 5162            | 4.0              | HDR4 | iPA          | -4.58                            | 11.00                       | -15.58      |
|        | 5204            | 4.0              | HDR4 | iPA          | -4.77                            | 11.00                       | -15.77      |
|        | 5245            | 4.0              | HDR4 | iPA          | -4.41                            | 11.00                       | -15.41      |
|        | 5162            | 8.0              | HDR8 | ePA          | 4.14                             | 11.00                       | -6.86       |
|        | 5204            | 8.0              | HDR8 | ePA          | 3.68                             | 11.00                       | -7.32       |
|        | 5245            | 8.0              | HDR8 | ePA          | 3.53                             | 11.00                       | -7.48       |
|        | 5162            | 8.0              | HDR8 | iPA          | -7.17                            | 11.00                       | -18.17      |
|        | 5204            | 8.0              | HDR8 | iPA          | -7.67                            | 11.00                       | -18.67      |
|        | 5245            | 8.0              | HDR8 | iPA          | -7.25                            | 11.00                       | -18.25      |


Table 7-22. FCC Power Spectral Density Measurements Antenna 2a

|        | Frequency [MHz] | Data Rate [Mbps] | Mode | Power Scheme | Measured Power Density [dBm/MHz] | Antenna Gain [dBi] | e.i.r.p. Power Density [dBm/MHz] | ISED Max e.i.r.p. Power Density [dBm/MHz] | Margin [dB] |
|--------|-----------------|------------------|------|--------------|----------------------------------|--------------------|----------------------------------|-------------------------------------------|-------------|
| Band 1 | 5162            | 4.0              | HDR4 | ePA          | 6.96                             | -1.10              | 5.86                             | 10.00                                     | -4.14       |
|        | 5204            | 4.0              | HDR4 | ePA          | 6.44                             | -1.10              | 5.34                             | 10.00                                     | -4.66       |
|        | 5245            | 4.0              | HDR4 | ePA          | 6.08                             | -1.10              | 4.98                             | 10.00                                     | -5.02       |
|        | 5162            | 4.0              | HDR4 | iPA          | -4.58                            | -1.10              | -5.68                            | 10.00                                     | -15.68      |
|        | 5204            | 4.0              | HDR4 | iPA          | -4.77                            | -1.10              | -5.87                            | 10.00                                     | -15.87      |
|        | 5245            | 4.0              | HDR4 | iPA          | -4.41                            | -1.10              | -5.51                            | 10.00                                     | -15.51      |
|        | 5162            | 8.0              | HDR8 | ePA          | 4.14                             | -1.10              | 3.04                             | 10.00                                     | -6.96       |
|        | 5204            | 8.0              | HDR8 | ePA          | 3.68                             | -1.10              | 2.58                             | 10.00                                     | -7.42       |
|        | 5245            | 8.0              | HDR8 | ePA          | 3.53                             | -1.10              | 2.43                             | 10.00                                     | -7.58       |
|        | 5162            | 8.0              | HDR8 | iPA          | -7.17                            | -1.10              | -8.27                            | 10.00                                     | -18.27      |
|        | 5204            | 8.0              | HDR8 | iPA          | -7.67                            | -1.10              | -8.77                            | 10.00                                     | -18.77      |
|        | 5245            | 8.0              | HDR8 | iPA          | -7.25                            | -1.10              | -8.35                            | 10.00                                     | -18.35      |


Table 7-23. ISED Power Spectral Density Measurements Antenna 2a

|                                         |                                                                                                                                   |                            |                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                             | EUT Type:<br>Tablet Device | Page 83 of 176                    |

V 10.5 12/15/2021

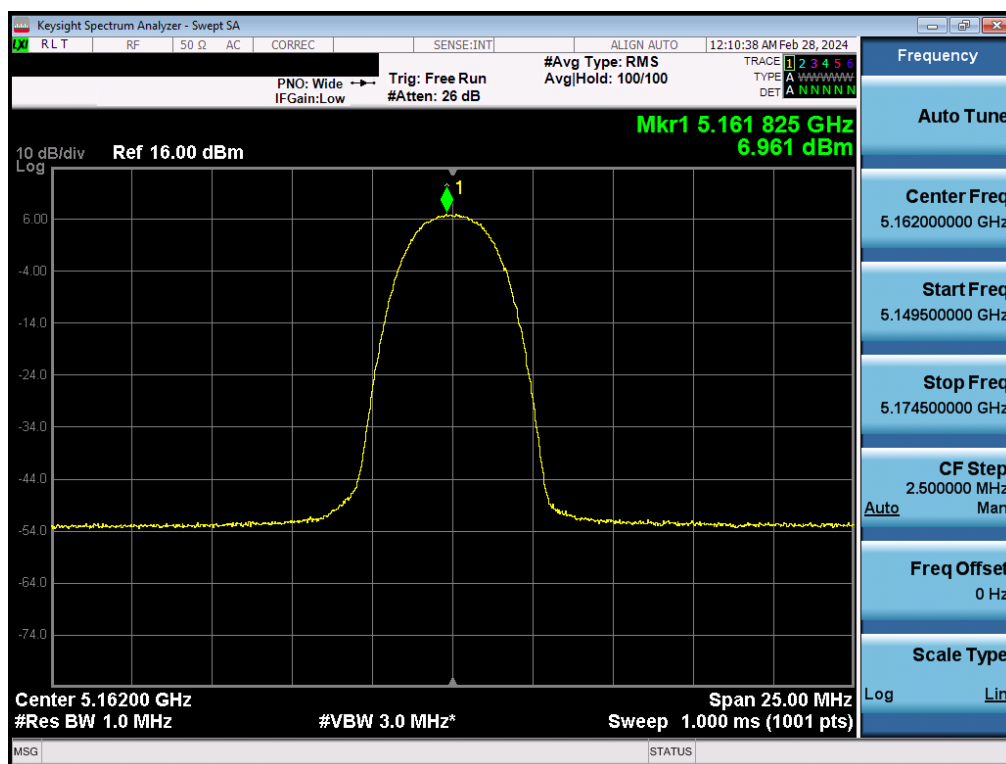

Plot 7-91. PSD Antenna 2a (HDR4, ePA – 5162MHz)

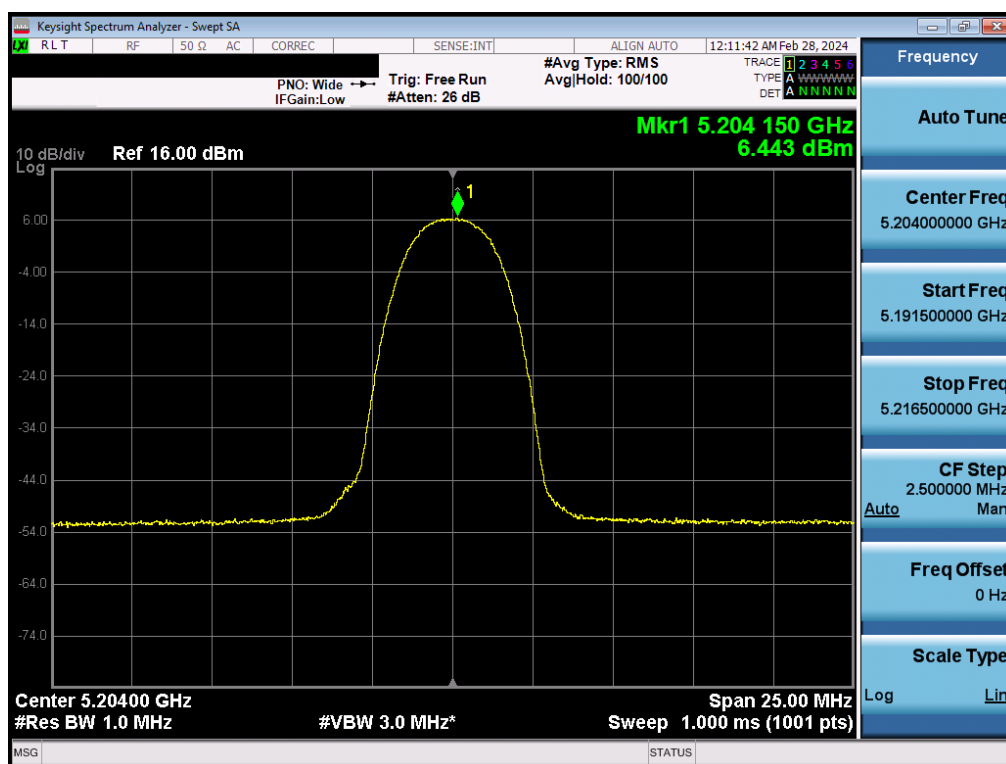


Plot 7-92. PSD Antenna 2a (HDR4, ePA – 5204MHz)


|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 84 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

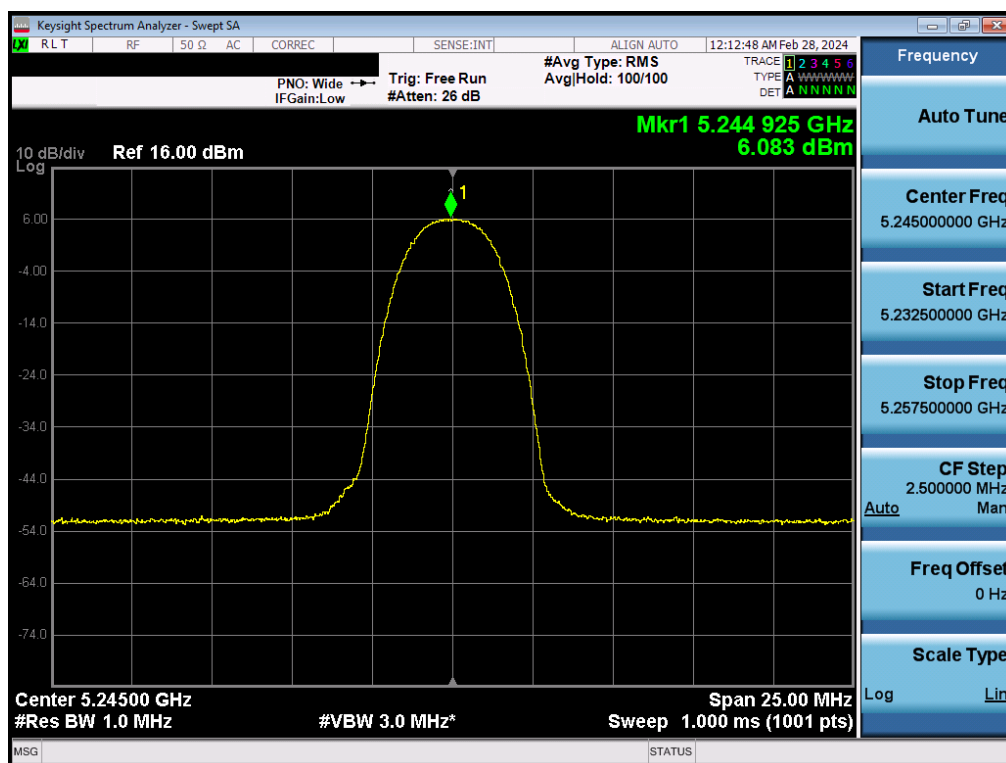


Plot 7-93. PSD Antenna 2a (HDR4, ePA- 5245MHz)

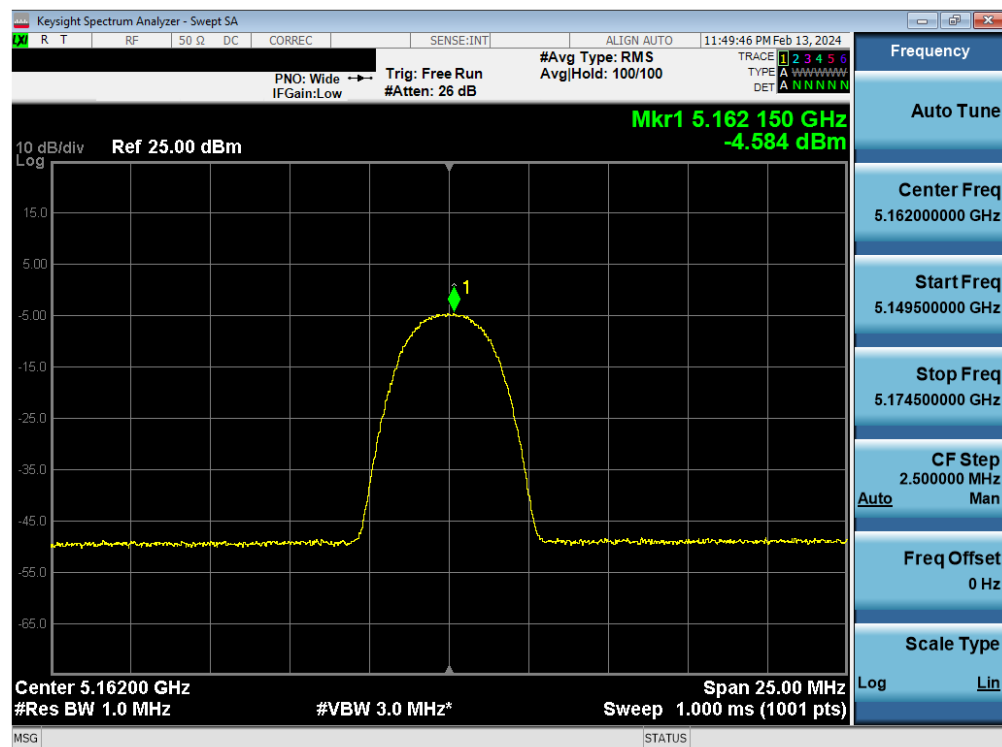


Plot 7-94. PSD Antenna 2a (HDR4, iPA - 5162MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 85 of 176                    |

V 10.5 12/15/2021

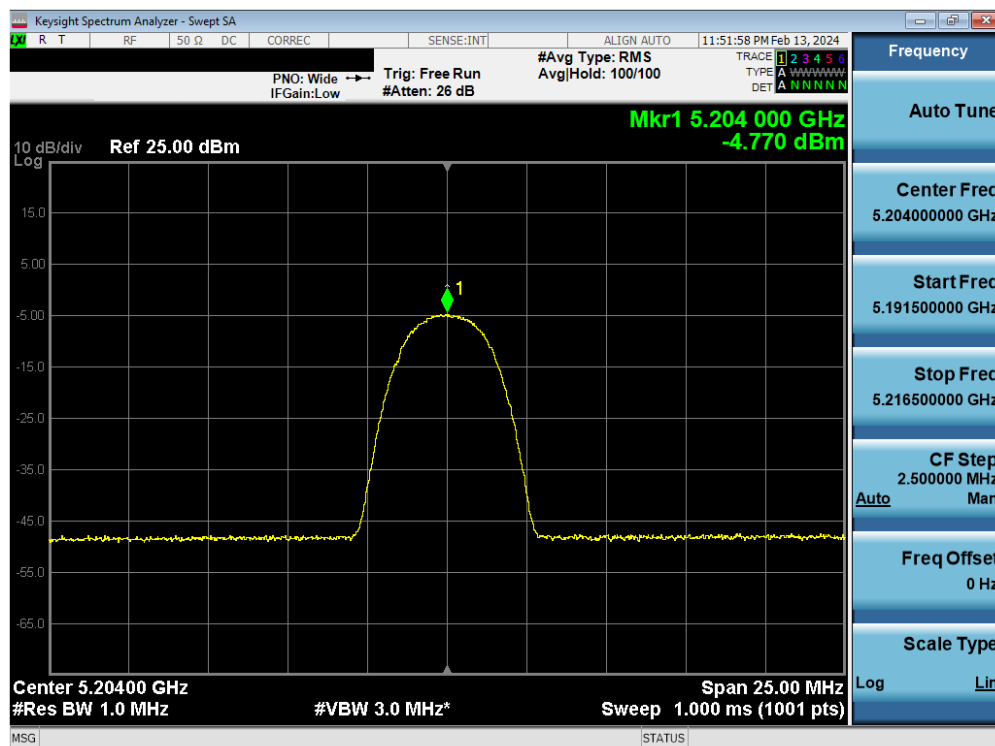

Plot 7-95. PSD Antenna 2a (HDR4, iPA – 5204MHz)

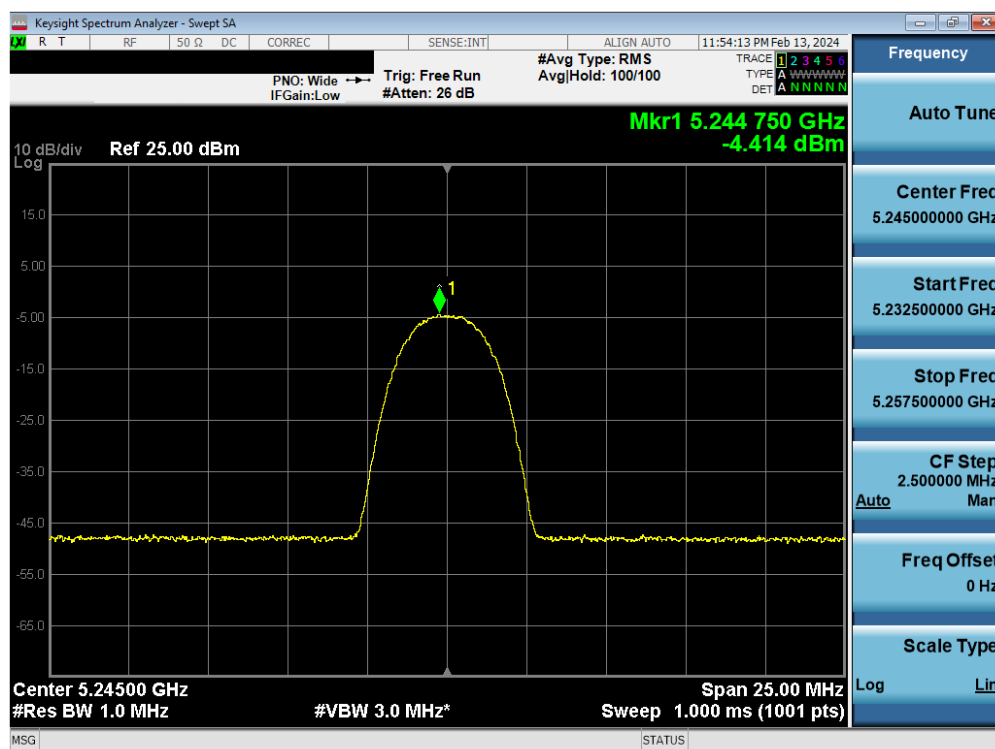


Plot 7-96. PSD Antenna 2a (HDR4, iPA– 5245MHz)


|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 86 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

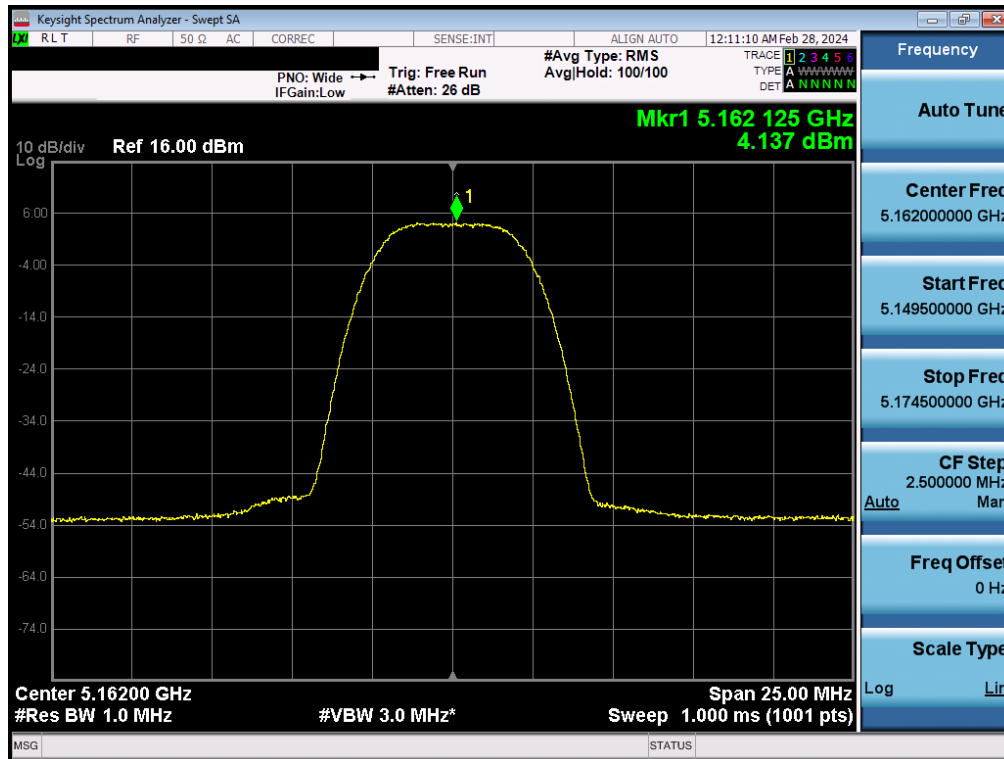

Plot 7-97. PSD Antenna 2a (HDR8, ePA – 5162MHz)

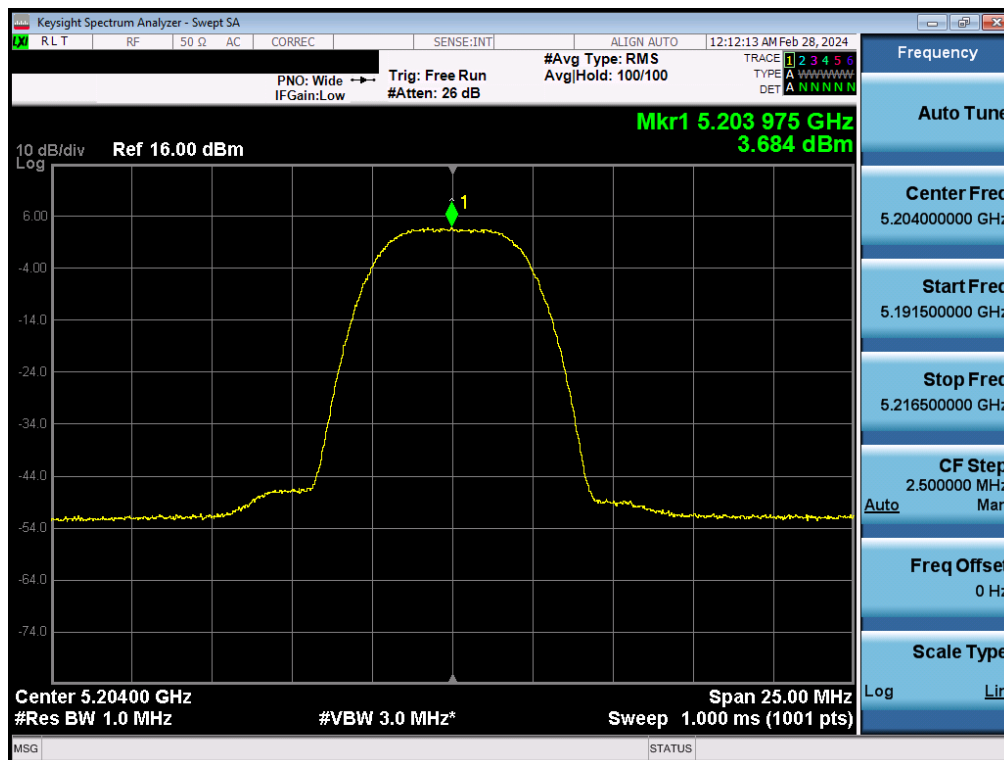


Plot 7-98. PSD Antenna 2a (HDR8, ePA – 5204MHz)


|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 87 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

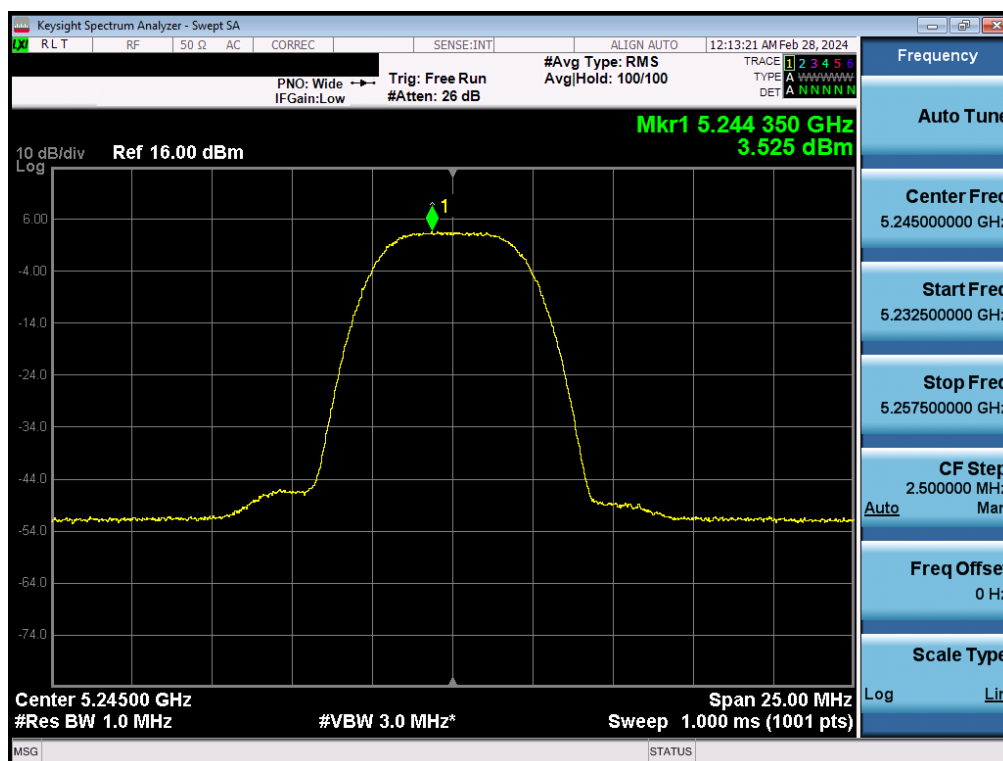

Plot 7-99. PSD Antenna 2a (HDR8, ePA– 5245MHz)

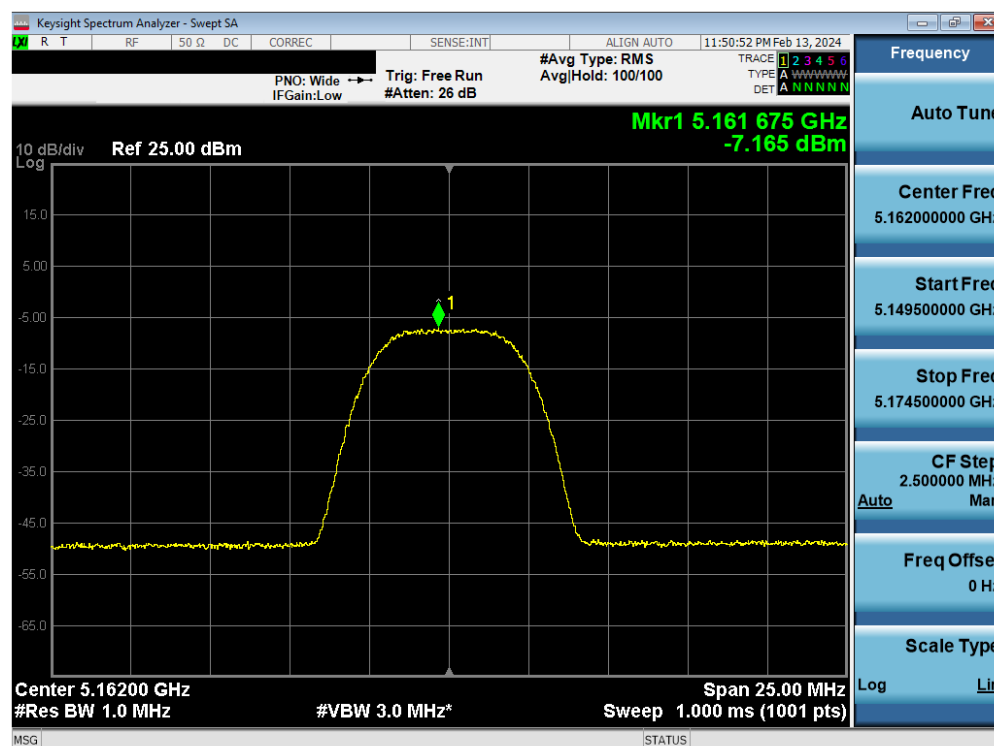


Plot 7-100. PSD Antenna 2a (HDR8, iPA – 5162MHz)


|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 88 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

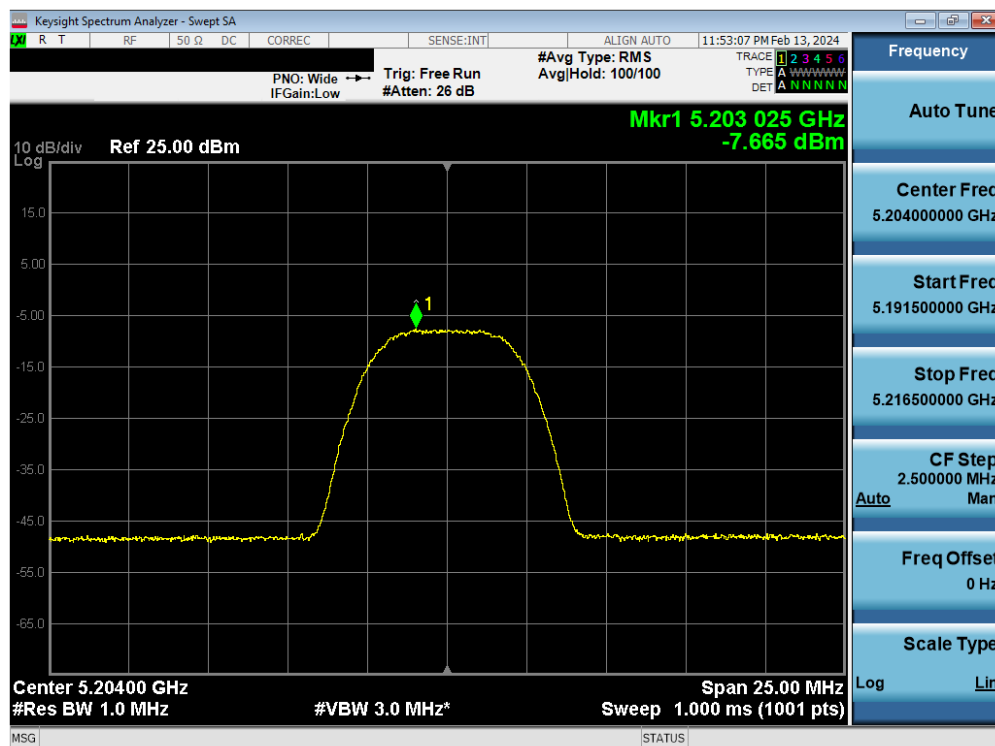

Plot 7-101. PSD Antenna 2a (HDR8, iPA – 5204MHz)

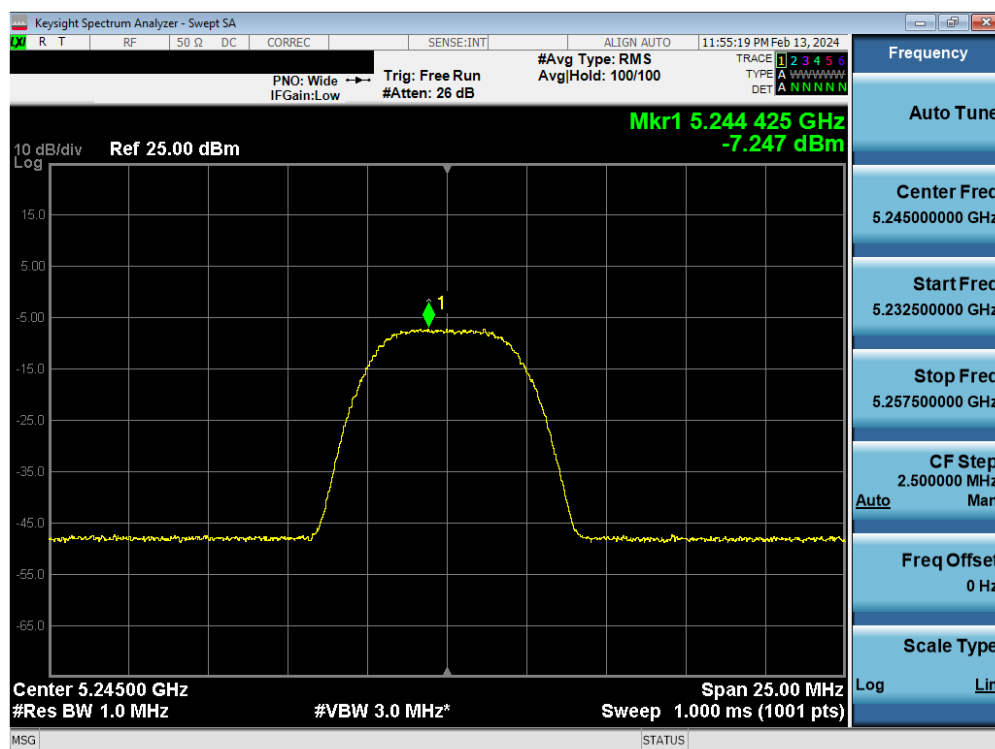


Plot 7-102. PSD Antenna 2a (HDR8, iPA– 5245MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 89 of 176                    |


|        | Frequency [MHz] | Data Rate [Mbps] | Mode | Power Scheme | Measured Power Density [dBm/500kHz] | Max Permissible Power Density [dBm/500kHz] | Margin [dB] |
|--------|-----------------|------------------|------|--------------|-------------------------------------|--------------------------------------------|-------------|
| Band 3 | 5733            | 4.0              | HDR4 | ePA          | 6.11                                | 30.00                                      | -23.89      |
|        | 5789            | 4.0              | HDR4 | ePA          | 5.92                                | 30.00                                      | -24.08      |
|        | 5844            | 4.0              | HDR4 | ePA          | 6.42                                | 30.00                                      | -23.58      |
|        | 5733            | 4.0              | HDR4 | iPA          | -6.18                               | 30.00                                      | -36.18      |
|        | 5789            | 4.0              | HDR4 | iPA          | -5.89                               | 30.00                                      | -35.89      |
|        | 5844            | 4.0              | HDR4 | iPA          | -6.61                               | 30.00                                      | -36.61      |
|        | 5733            | 8.0              | HDR8 | ePA          | 2.71                                | 30.00                                      | -27.29      |
|        | 5789            | 8.0              | HDR8 | ePA          | 3.24                                | 30.00                                      | -26.76      |
|        | 5844            | 8.0              | HDR8 | ePA          | 3.26                                | 30.00                                      | -26.75      |
|        | 5733            | 8.0              | HDR8 | iPA          | -8.62                               | 30.00                                      | -38.62      |
|        | 5789            | 8.0              | HDR8 | iPA          | -9.97                               | 30.00                                      | -39.97      |
|        | 5844            | 8.0              | HDR8 | iPA          | -9.48                               | 30.00                                      | -39.48      |

Table 7-24. Power Spectral Density Measurements Antenna 2a

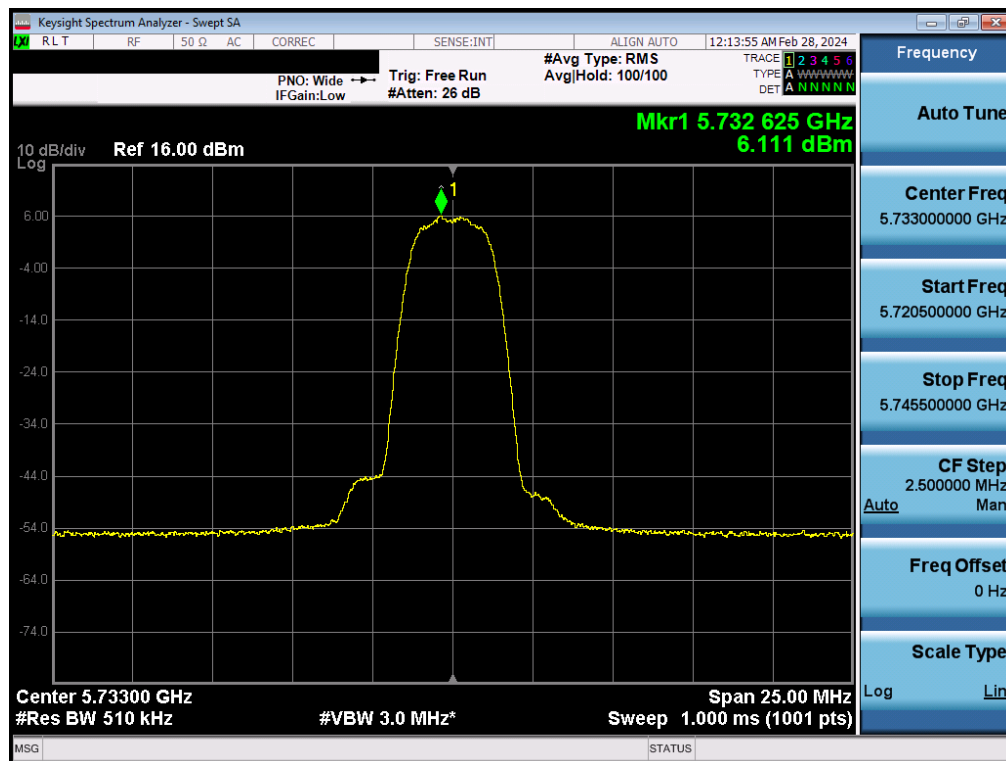


Plot 7-103. PSD Antenna 2a (HDR4, ePA 5733MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 90 of 176                    |

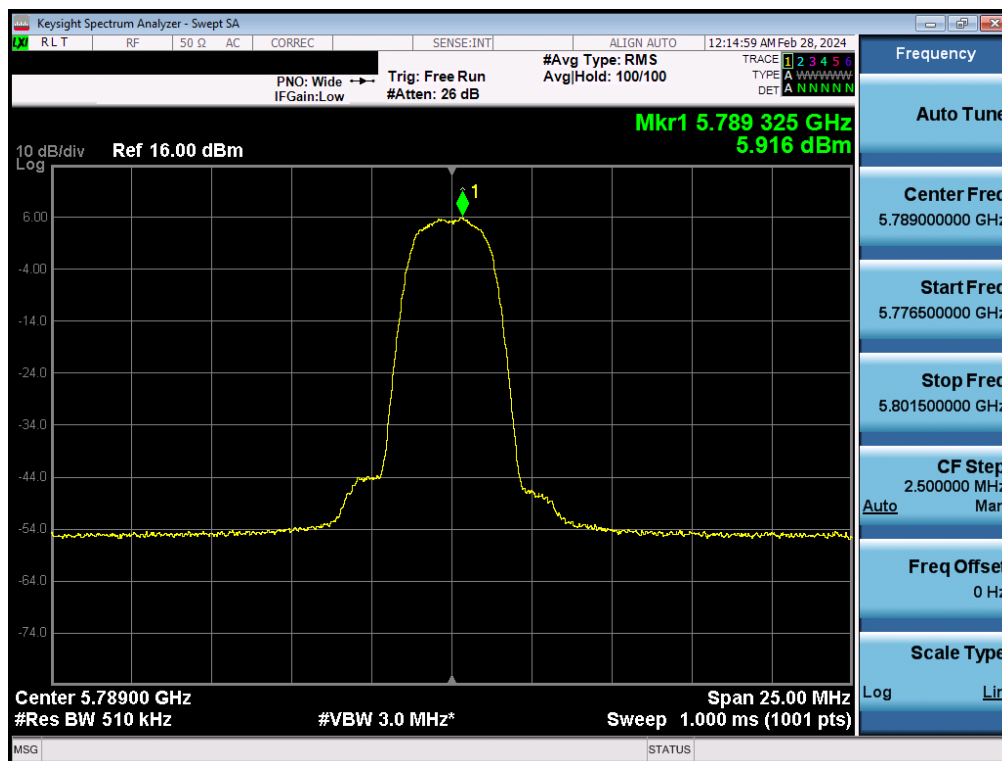

Plot 7-104. PSD Antenna 2a (HDR4, ePA 5789MHz)

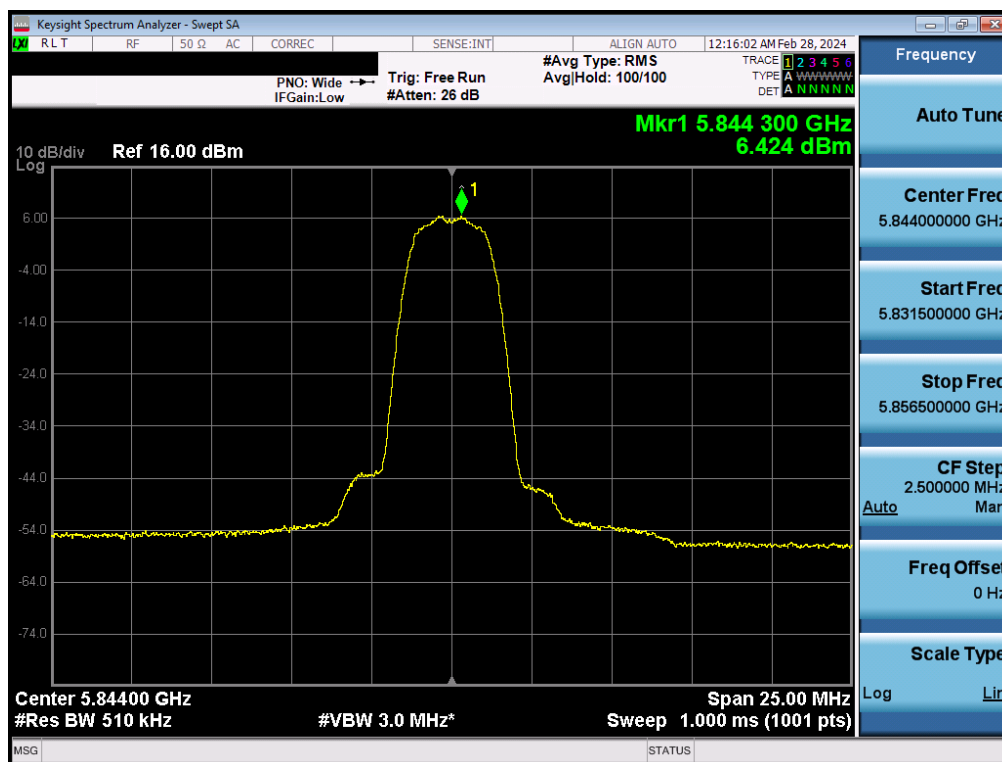


Plot 7-105. PSD Antenna 2a (HDR4, ePA 5844MHz)


|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 91 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

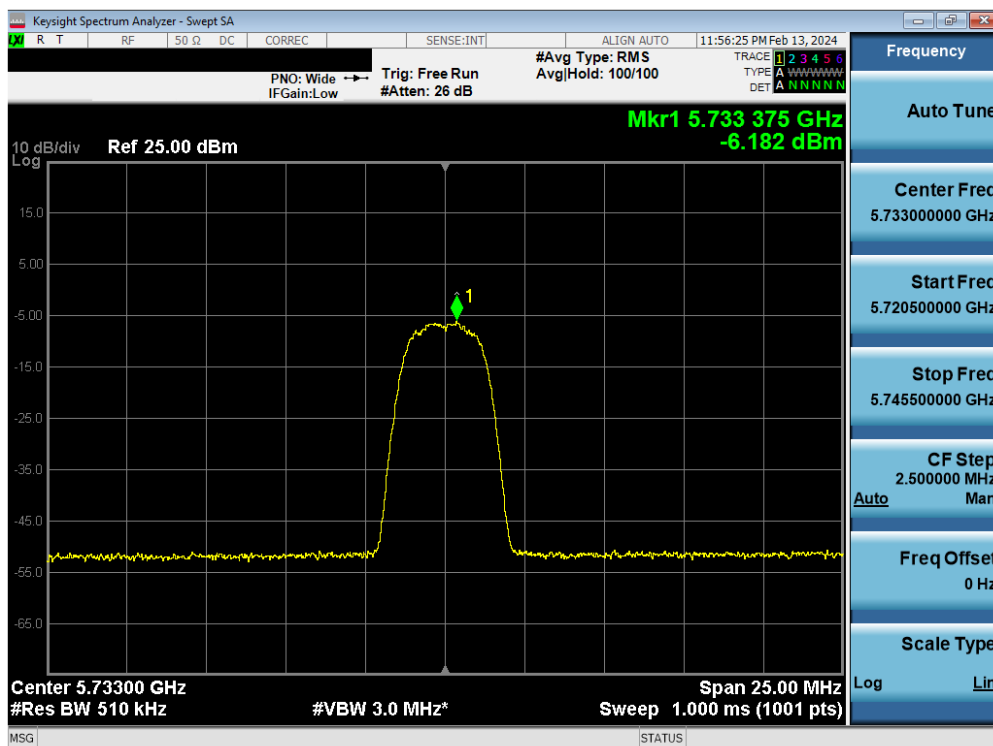


Plot 7-106. PSD Antenna 2a (HDR4, iPA 5733MHz)

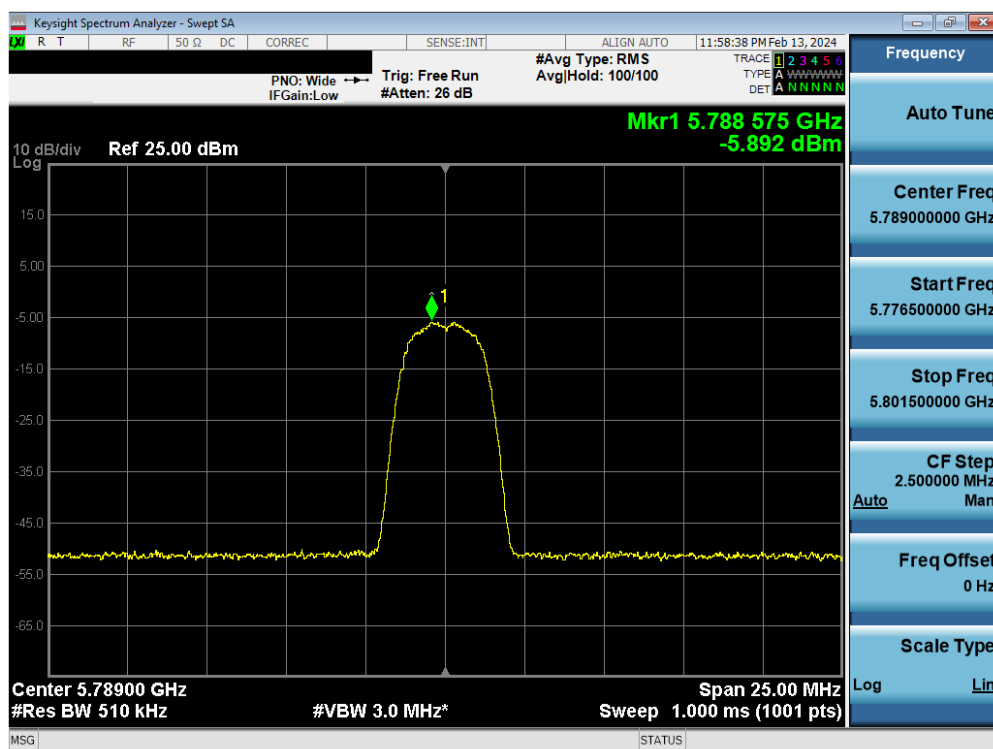


Plot 7-107. PSD Antenna 2a (HDR4, iPA 5789MHz)

|                                         |                                                                                                                                   |                            |                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                             | EUT Type:<br>Tablet Device | Page 92 of 176                    |

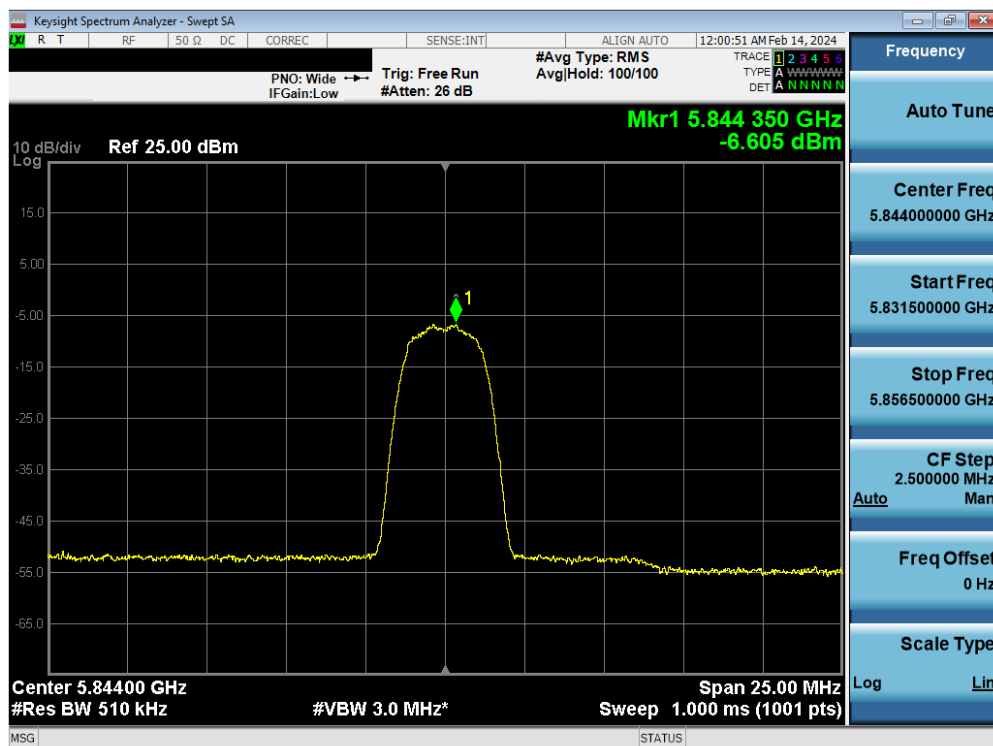


Plot 7-108. PSD Antenna 2a (HDR4, iPA 5844MHz)

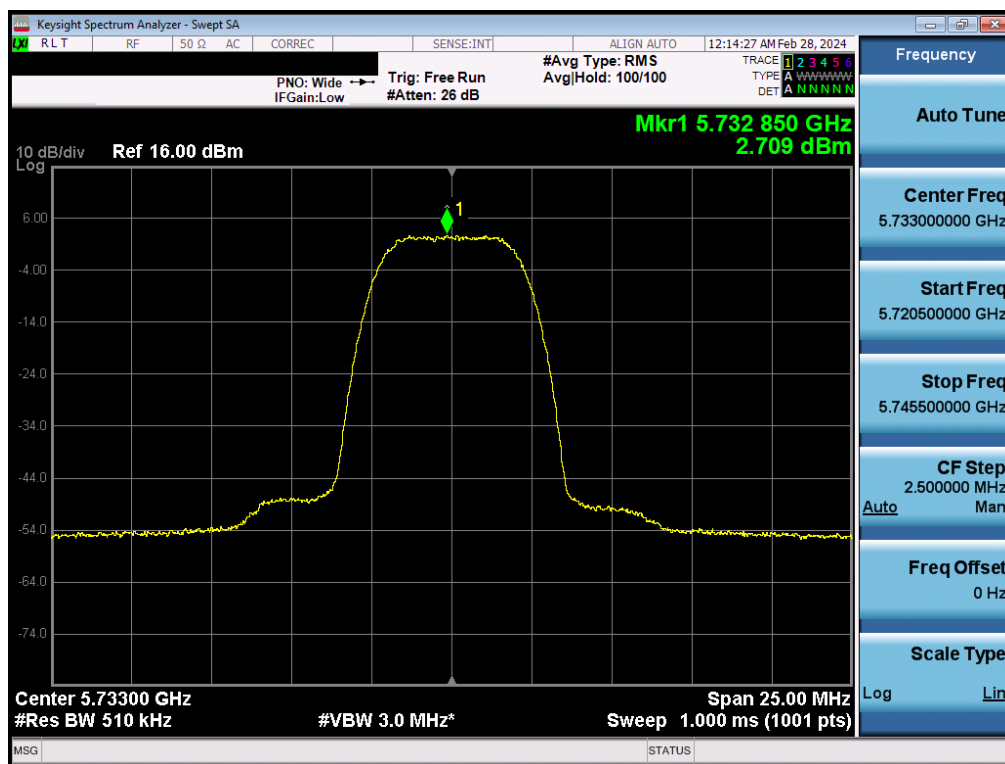


Plot 7-109. PSD Antenna 2a (HDR8, ePA 5733MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 93 of 176                    |

V 10.5 12/15/2021

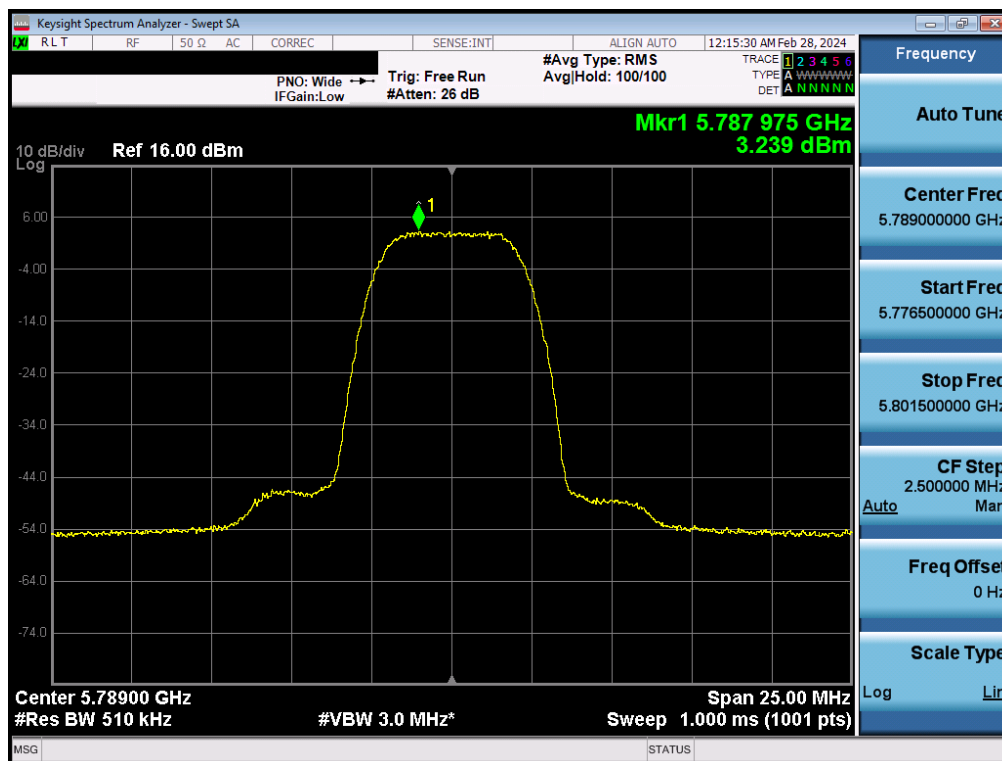

Plot 7-110. PSD Antenna 2a (HDR8, ePA 5789MHz)

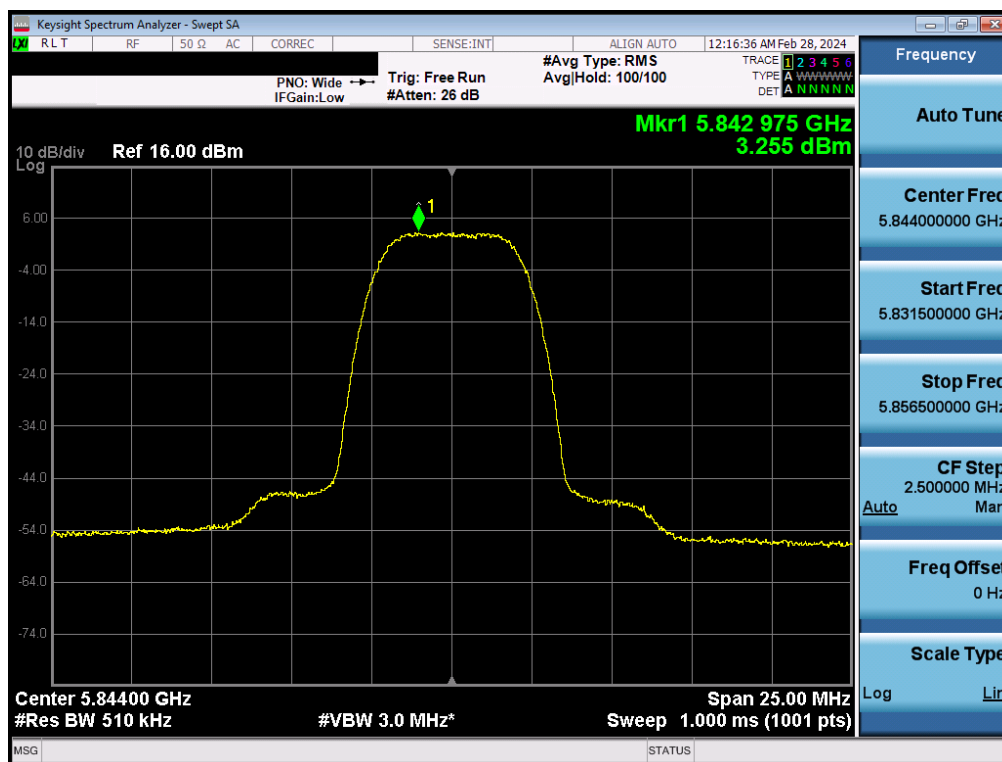


Plot 7-111. PSD Antenna 2a (HDR8, ePA 5844MHz)


|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 94 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

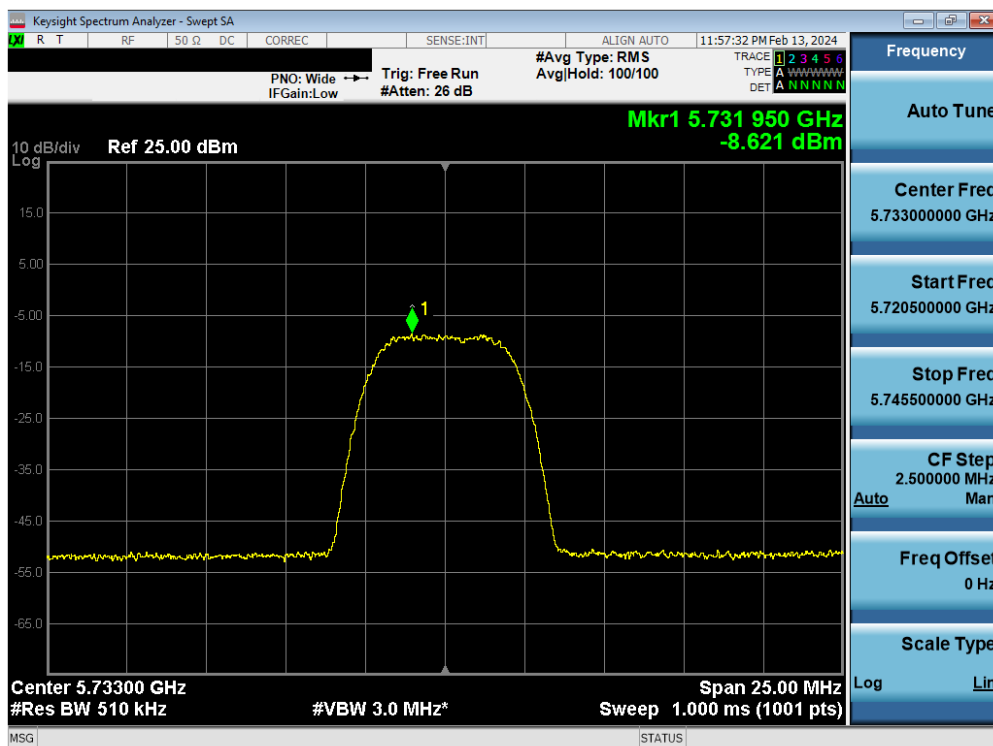


Plot 7-112. PSD Antenna 2a (HDR8, iPA 5733MHz)

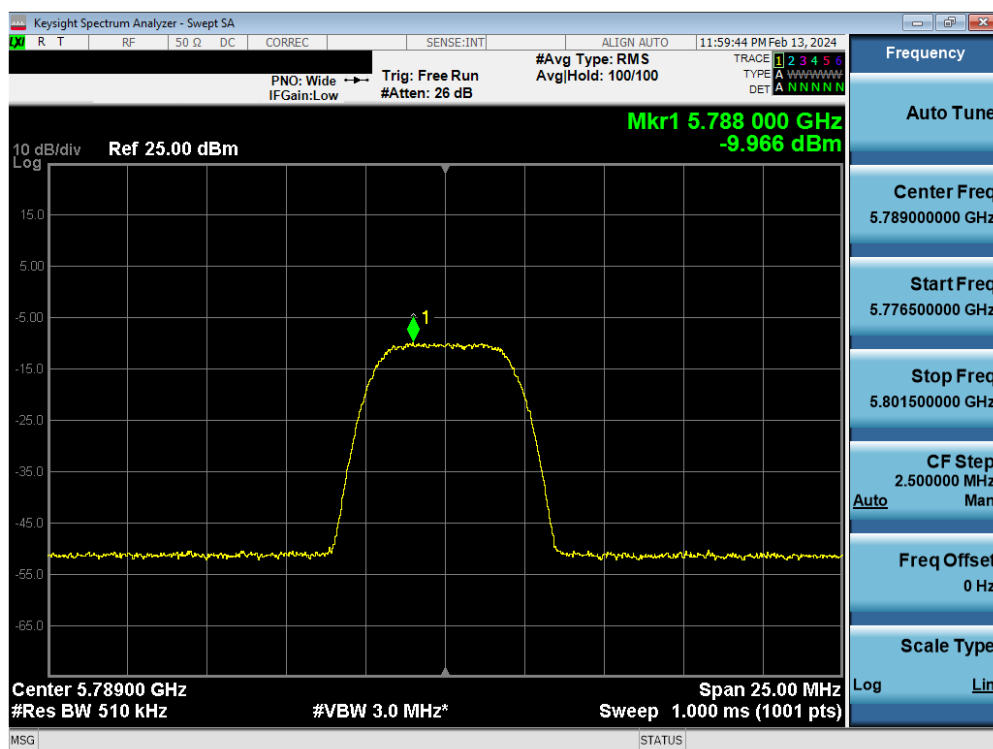

Plot 7-113. PSD Antenna 2a (HDR8, iPA 5789MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 95 of 176                    |

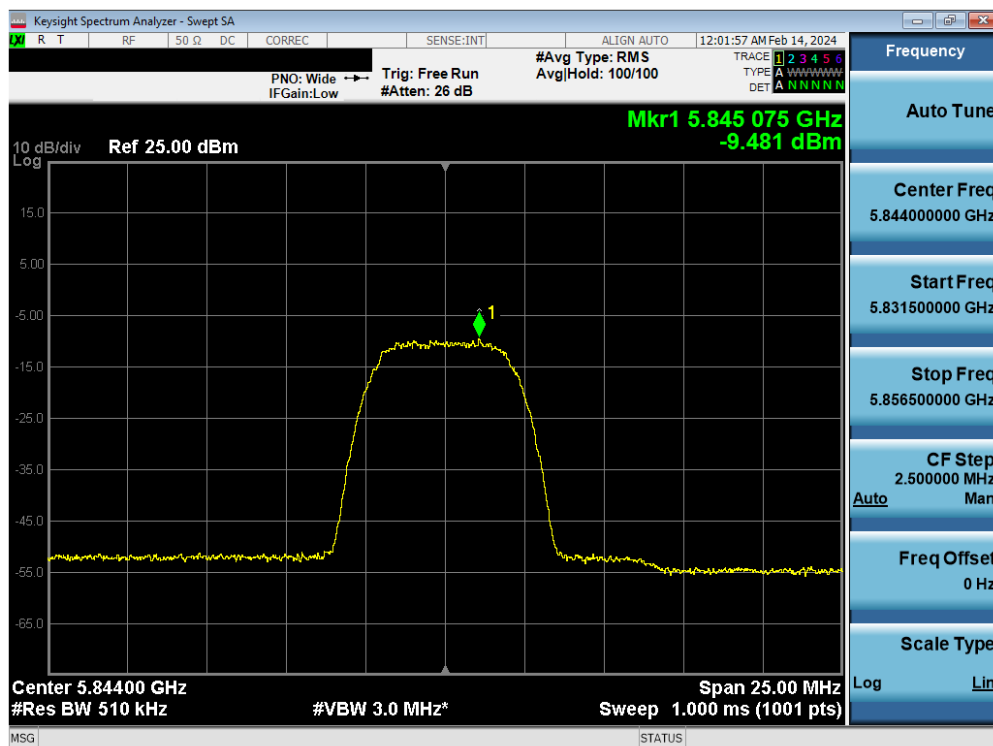

Plot 7-114. PSD Antenna 2a (HDR8, iPA 5844MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 96 of 176                    |

V 10.5 12/15/2021

## 7.5.4 TxBF Power Spectral Density Measurements


|        | Frequency [MHz] | Data Rate [Mbps] | Mode | Power Scheme | Antenna 5b Power Density [dBm/MHz] | Antenna 4a Power Density [dBm/MHz] | Summed Power Density [dBm/MHz] | Max Power Density [dBm/MHz] | Margin [dB] |
|--------|-----------------|------------------|------|--------------|------------------------------------|------------------------------------|--------------------------------|-----------------------------|-------------|
| Band 1 | 5162            | 4.0              | HDR4 | ePA          | 6.18                               | 5.62                               | 8.92                           | 11.00                       | -2.08       |
|        | 5204            | 4.0              | HDR4 | ePA          | 6.72                               | 5.49                               | 9.16                           | 11.00                       | -1.84       |
|        | 5245            | 4.0              | HDR4 | ePA          | 6.42                               | 5.32                               | 8.91                           | 11.00                       | -2.09       |
|        | 5162            | 4.0              | HDR4 | iPA          | -4.87                              | -1.91                              | -0.13                          | 11.00                       | -11.13      |
|        | 5204            | 4.0              | HDR4 | iPA          | -4.45                              | -1.61                              | 0.21                           | 11.00                       | -10.79      |
|        | 5245            | 4.0              | HDR4 | iPA          | -4.28                              | -2.17                              | -0.09                          | 11.00                       | -11.09      |
|        | 5162            | 8.0              | HDR8 | ePA          | 5.02                               | 3.28                               | 7.25                           | 11.00                       | -3.75       |
|        | 5204            | 8.0              | HDR8 | ePA          | 5.87                               | 2.56                               | 7.53                           | 11.00                       | -3.47       |
|        | 5245            | 8.0              | HDR8 | ePA          | 5.46                               | 2.83                               | 7.35                           | 11.00                       | -3.65       |
|        | 5162            | 8.0              | HDR8 | iPA          | -7.19                              | -4.47                              | -2.61                          | 11.00                       | -13.61      |
|        | 5204            | 8.0              | HDR8 | iPA          | -6.55                              | -4.11                              | -2.15                          | 11.00                       | -13.15      |
|        | 5245            | 8.0              | HDR8 | iPA          | -7.25                              | -4.54                              | -2.68                          | 11.00                       | -13.68      |

Table 7-25. FCC Power Spectral Density Measurements TxBF


|        | Frequency [MHz] | Data Rate [Mbps] | Mode | Power Scheme | Antenna 5b Power Density [dBm/MHz] | Antenna 4a Power Density [dBm/MHz] | Summed Power Density [dBm/MHz] | Directional Antenna Gain [dBi] | e.i.r.p Power Density [dBm/MHz] | ISED Max e.i.r.p. Power Density [dBm/MHz] | Margin [dB] |
|--------|-----------------|------------------|------|--------------|------------------------------------|------------------------------------|--------------------------------|--------------------------------|---------------------------------|-------------------------------------------|-------------|
| Band 1 | 5162            | 4.0              | HDR4 | ePA          | -0.48                              | 2.08                               | 3.99                           | 4.05                           | 8.04                            | 10.00                                     | -1.96       |
|        | 5204            | 4.0              | HDR4 | ePA          | -0.38                              | 2.38                               | 4.23                           | 4.05                           | 8.28                            | 10.00                                     | -1.72       |
|        | 5245            | 4.0              | HDR4 | ePA          | -0.17                              | 2.58                               | 4.43                           | 4.05                           | 8.48                            | 10.00                                     | -1.52       |
|        | 5162            | 4.0              | HDR4 | iPA          | -4.87                              | -1.91                              | -0.13                          | 4.05                           | 3.92                            | 10.00                                     | -6.08       |
|        | 5204            | 4.0              | HDR4 | iPA          | -4.45                              | -1.61                              | 0.21                           | 4.05                           | 4.26                            | 10.00                                     | -5.74       |
|        | 5245            | 4.0              | HDR4 | iPA          | -4.28                              | -2.17                              | -0.09                          | 4.05                           | 3.96                            | 10.00                                     | -6.04       |
|        | 5162            | 8.0              | HDR8 | ePA          | -0.21                              | 2.41                               | 4.31                           | 4.05                           | 8.36                            | 10.00                                     | -1.64       |
|        | 5204            | 8.0              | HDR8 | ePA          | -0.57                              | 2.21                               | 4.05                           | 4.05                           | 8.10                            | 10.00                                     | -1.90       |
|        | 5245            | 8.0              | HDR8 | ePA          | 0.02                               | 2.35                               | 4.35                           | 4.05                           | 8.40                            | 10.00                                     | -1.60       |
|        | 5162            | 8.0              | HDR8 | iPA          | -7.19                              | -4.47                              | -2.61                          | 4.05                           | 1.44                            | 10.00                                     | -8.56       |
|        | 5204            | 8.0              | HDR8 | iPA          | -6.55                              | -4.11                              | -2.15                          | 4.05                           | 1.90                            | 10.00                                     | -8.10       |
|        | 5245            | 8.0              | HDR8 | iPA          | -7.25                              | -4.54                              | -2.68                          | 4.05                           | 1.37                            | 10.00                                     | -8.63       |

Table 7-26. ISED Power Spectral Density Measurements TxBF

|                                         |                                                                                                                                   |                            |                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                                                                             | EUT Type:<br>Tablet Device | Page 97 of 176                    |

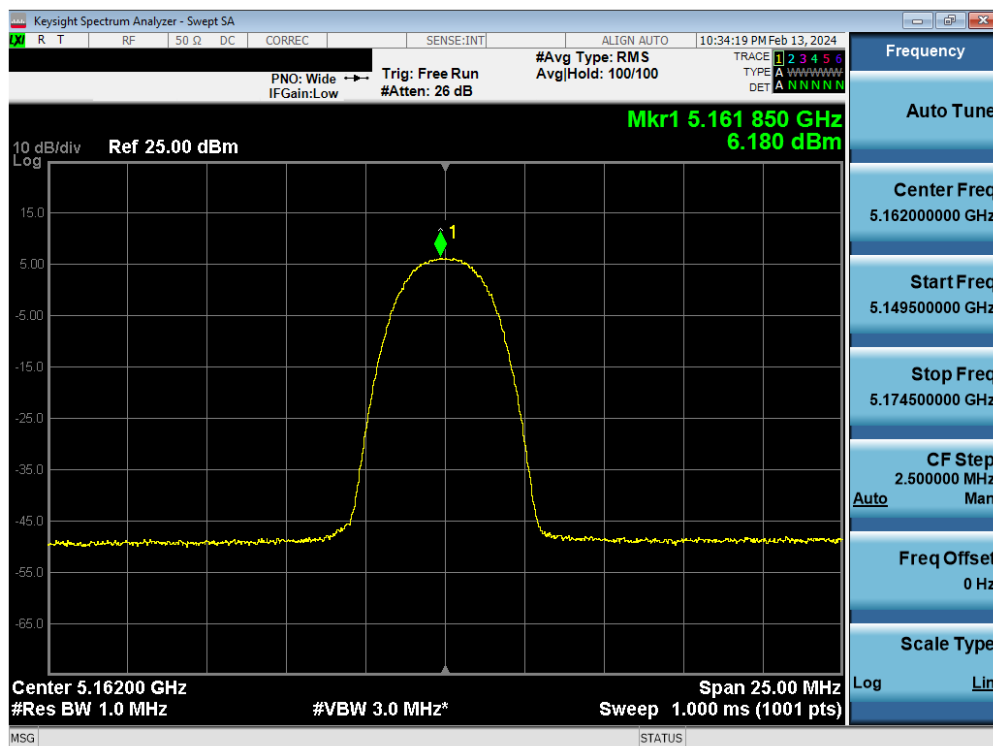


Plot 7-115. FCC PSD TxBF Antenna 5b (HDR4, ePA – 5162MHz)

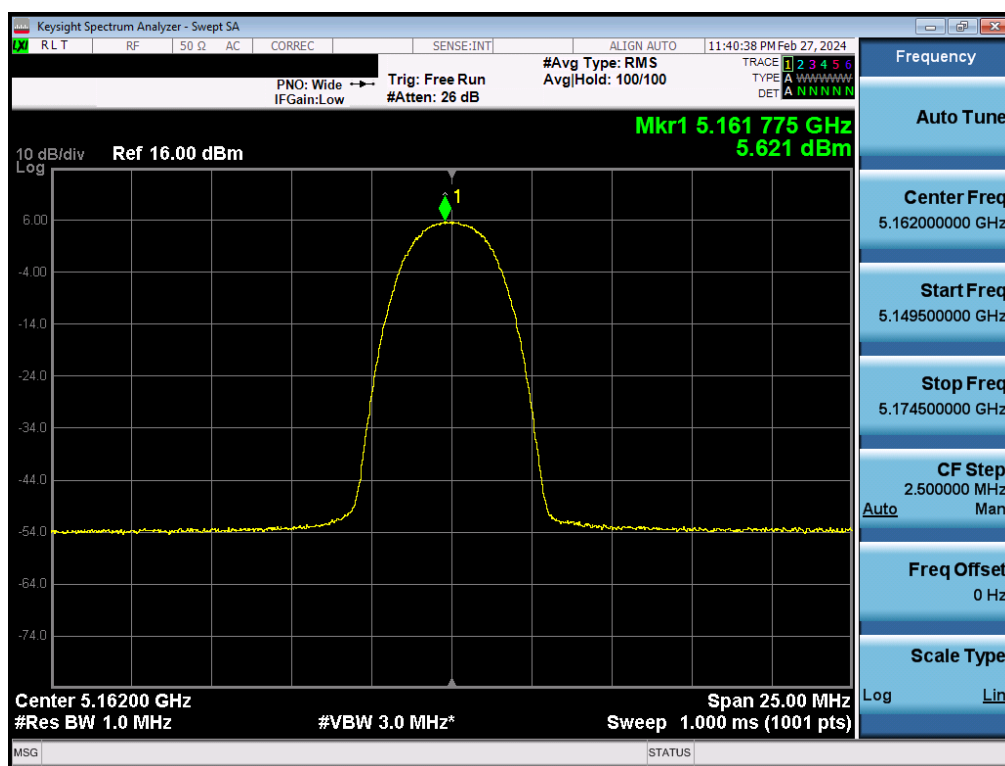


Plot 7-116. FCC PSD TxBF Antenna 4a (HDR4, ePA – 5162MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 98 of 176                    |

V 10.5 12/15/2021

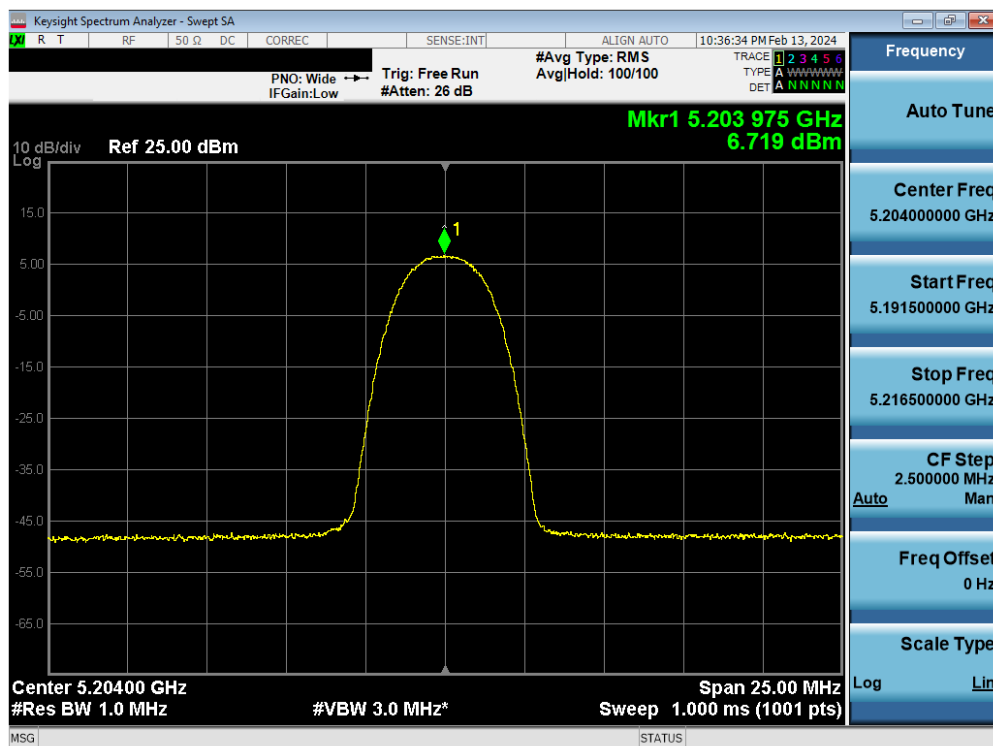

Plot 7-117. FCC PSD TxBF Antenna 5b (HDR4, ePA – 5204MHz)

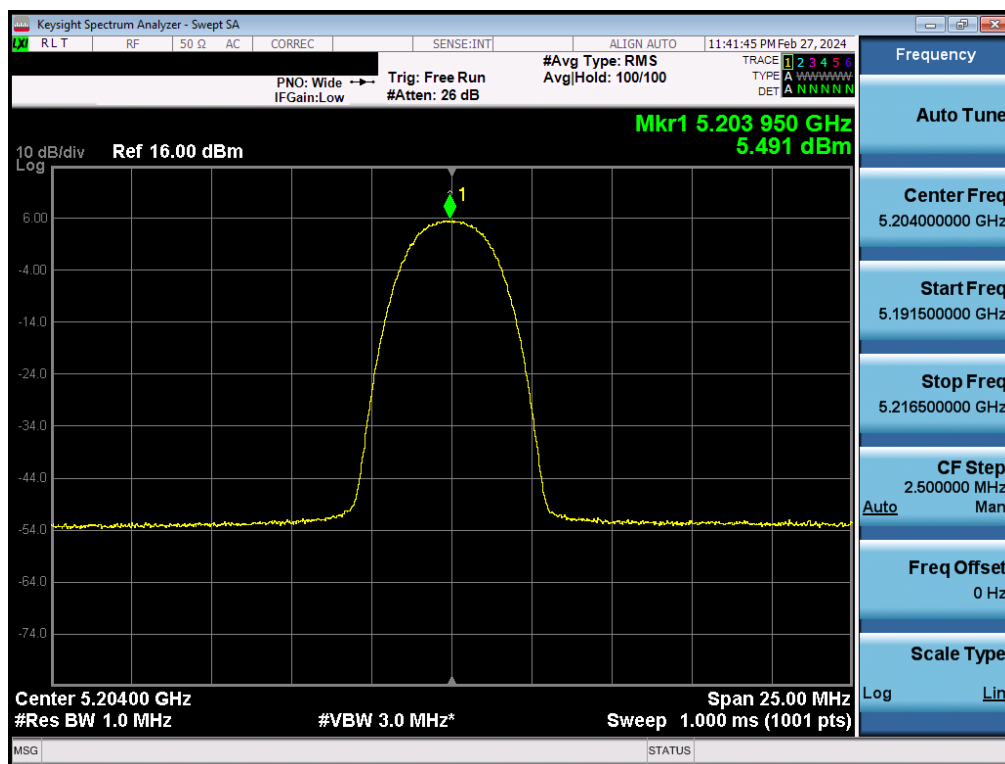

Plot 7-118. FCC PSD TxBF Antenna 4a (HDR4, ePA – 5204MHz)

|                                         |                                                                                     |                                       |                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2837<br>IC: 579C-A2837      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2311270068-20.BCG | Test Dates:<br>11/28/2023 - 3/20/2024                                               | EUT Type:<br>Tablet Device            | Page 99 of 176                    |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).