


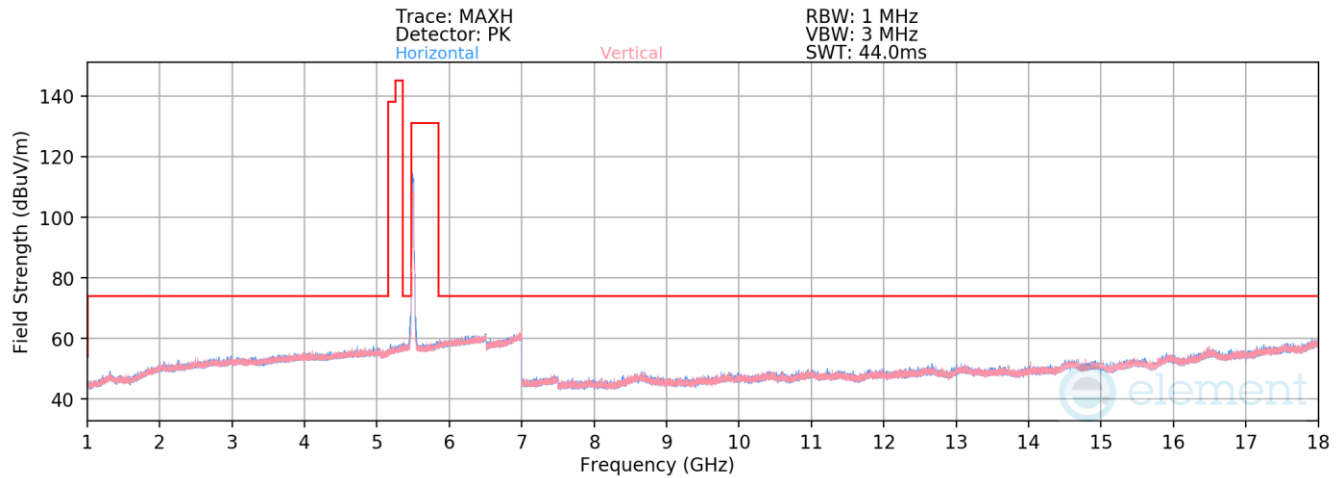

Plot 7-925. Radiated Spurious Emissions above 1GHz Antenna 3c (802.11ax(SU) – Ch. 100)


Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11000.00	Average	H	-	-	-80.73	12.10	38.37	53.98	-15.61
*	11000.00	Peak	H	-	-	-69.43	12.10	49.67	73.98	-24.31
	16500.00	Peak	H	-	-	-70.77	19.60	55.83	68.20	-12.37

Table 7-264. Radiated Measurements Antenna 3c

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 286 of 597

V 10.6 9/14/2023

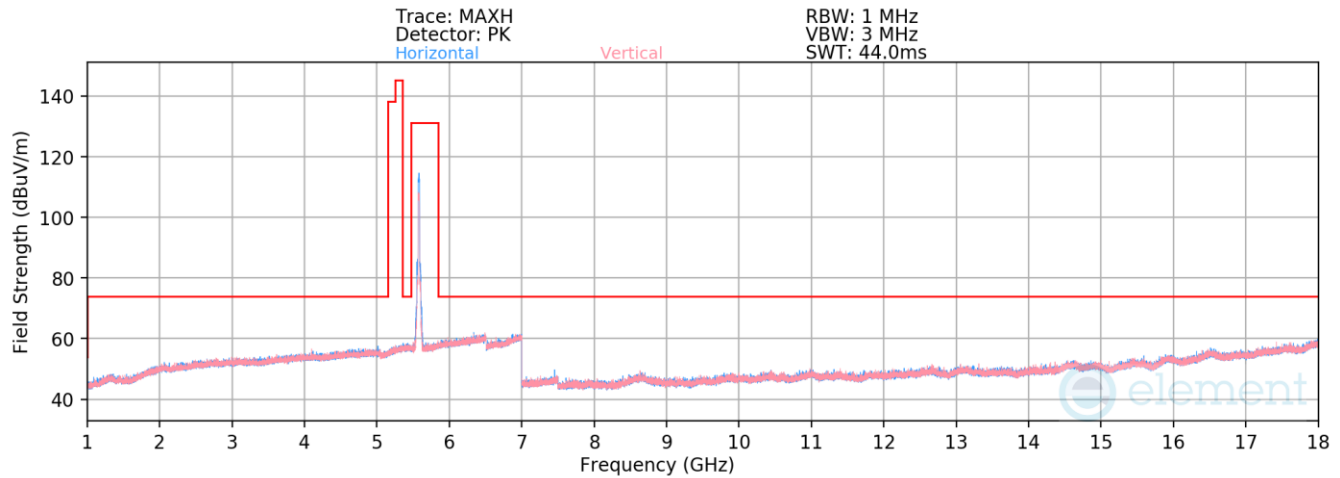

Plot 7-926. Radiated Spurious Emissions above 1GHz Antenna 3c (802.11ax(SU) – Ch. 116)

Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5580MHz
Channel: 116


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11160.00	Average	H	-	-	-79.89	11.29	38.40	53.98	-15.58
*	11160.00	Peak	H	-	-	-69.96	11.29	48.33	73.98	-25.65
	16740.00	Peak	H	-	-	-70.85	19.67	55.82	68.20	-12.38

Table 7-265. Radiated Measurements Antenna 3c

FCC ID: BCGA2903 IC: 579C-A2903	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 287 of 597

V 10.6 9/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

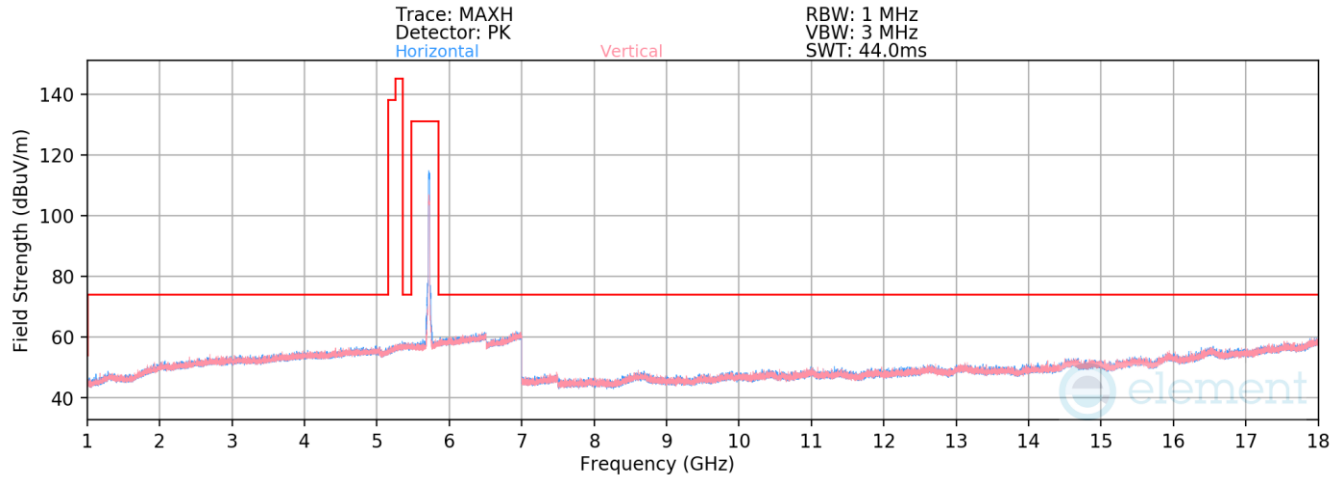

Plot 7-927. Radiated Spurious Emissions above 1GHz Antenna 3c (802.11ax(SU) – Ch. 144)


Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5720MHz
Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11440.00	Average	H	-	-	-80.11	12.05	38.94	53.98	-15.04
* 11440.00	Peak	H	-	-	-70.01	12.05	49.04	73.98	-24.94
17160.00	Peak	H	-	-	-71.88	20.91	56.03	68.20	-12.17

Table 7-266. Radiated Measurements Antenna 3c

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 288 of 597

V 10.6 9/14/2023

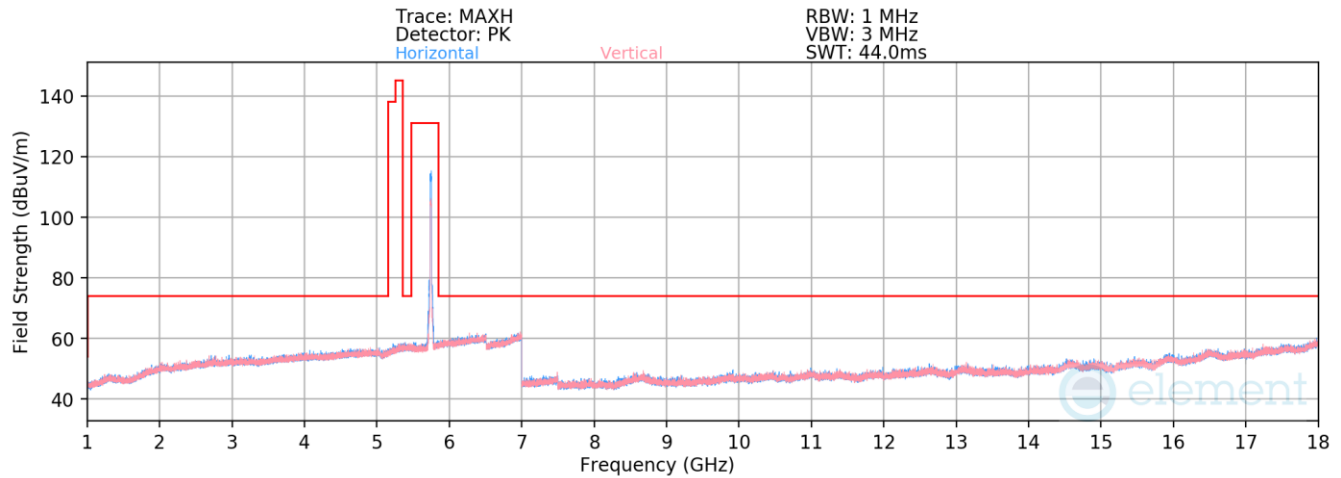

Plot 7-928. Radiated Spurious Emissions above 1GHz Antenna 3c (802.11ax(SU) – Ch. 149)

Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11490.00	Average	H	-	-	-80.73	11.97	38.24	53.98	-15.74
*	11490.00	Peak	H	-	-	-70.06	11.97	48.91	73.98	-25.07
	17235.00	Peak	H	-	-	-71.81	20.94	56.13	68.20	-12.07

Table 7-267. Radiated Measurements Antenna 3c

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 289 of 597

V 10.6 9/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

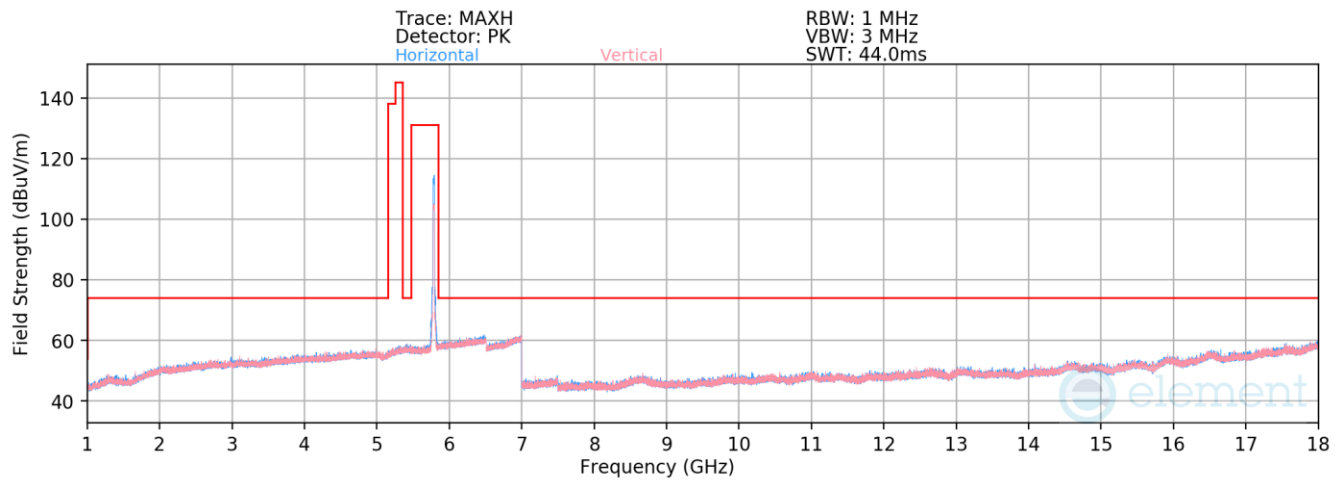

Plot 7-929. Radiated Spurious Emissions above 1GHz Antenna 3c (802.11ax(SU) – Ch. 157)

Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5785MHz
Channel: 157


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	H	-	-	-81.30	12.07	37.77	53.98	-16.21
* 11570.00	Peak	H	-	-	-70.01	12.07	49.06	73.98	-24.92
17355.00	Peak	H	-	-	-71.63	21.01	56.38	68.20	-11.82

Table 7-268. Radiated Measurements Antenna 3c

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 290 of 597

V 10.6 9/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

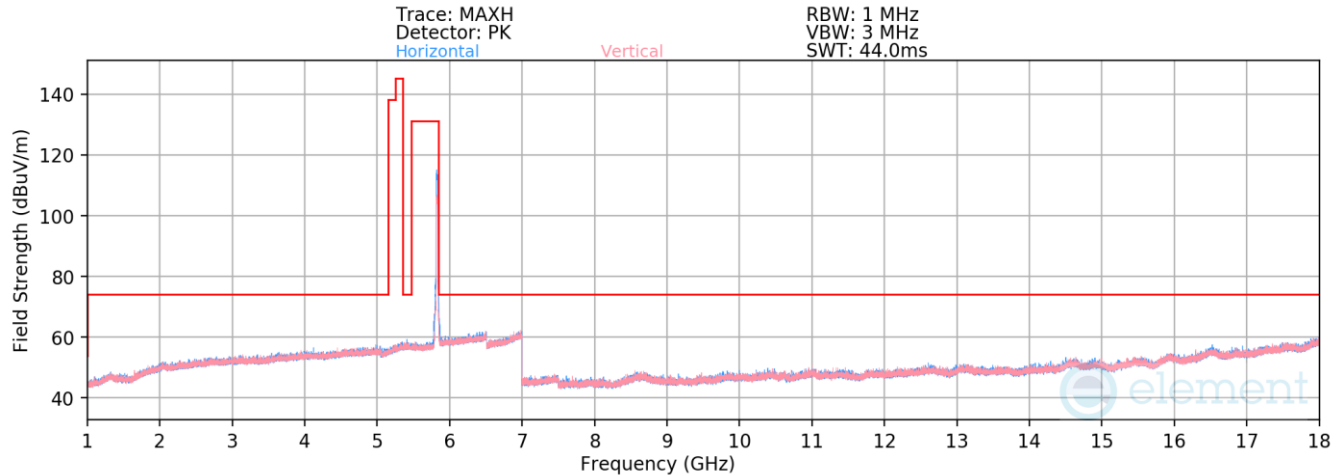

Plot 7-930. Radiated Spurious Emissions above 1GHz Antenna 3c (802.11ax(SU) – Ch. 165)

Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11650.00	Average	H	-	-	-81.48	11.97	37.49	53.98	-16.49
*	11650.00	Peak	H	-	-	-70.62	11.97	48.35	73.98	-25.63
	17475.00	Peak	H	-	-	-72.40	21.83	56.43	68.20	-11.77

Table 7-269. Radiated Measurements Antenna 3c

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 291 of 597

V 10.6 9/14/2023

7.6.2 Antenna 3a Radiated Spurious Emission

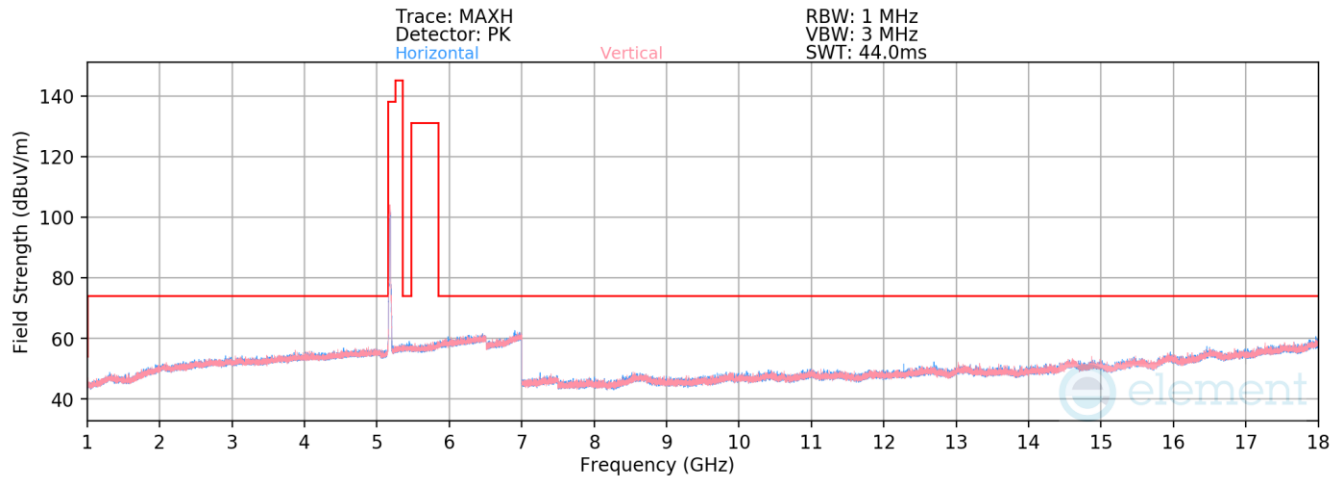

Plot 7-931. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11n – Ch. 36)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5180MHz
Channel: 36


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	Peak	H	-	-	-69.82	11.14	48.32	68.20	-19.88
* 15540.00	Average	H	-	-	-81.75	17.36	42.61	53.98	-11.37
* 15540.00	Peak	H	-	-	-70.94	17.36	53.42	73.98	-20.56

Table 7-270. Radiated Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 292 of 597

V 10.6 9/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

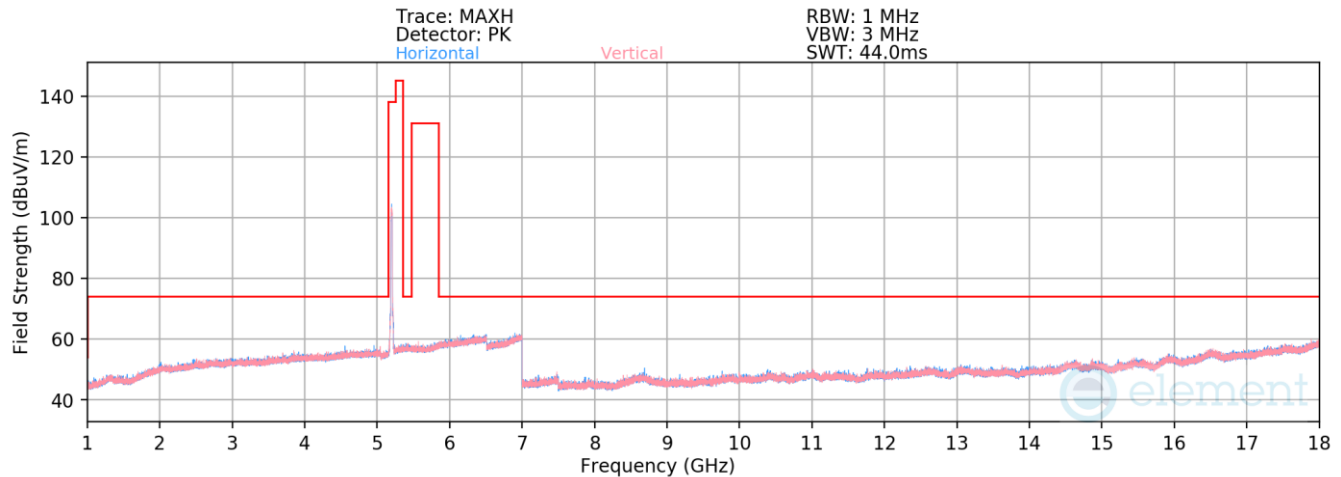

Plot 7-932. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11n – Ch. 40)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5200MHz
Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10400.00	Peak	H	-	-	-69.69	11.20	48.51	68.20	-19.69
* 15600.00	Average	H	-	-	-82.29	17.11	41.82	53.98	-12.16
* 15600.00	Peak	H	-	-	-71.24	17.11	52.87	73.98	-21.11

Table 7-271. Radiated Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 293 of 597

V 10.6 9/14/2023

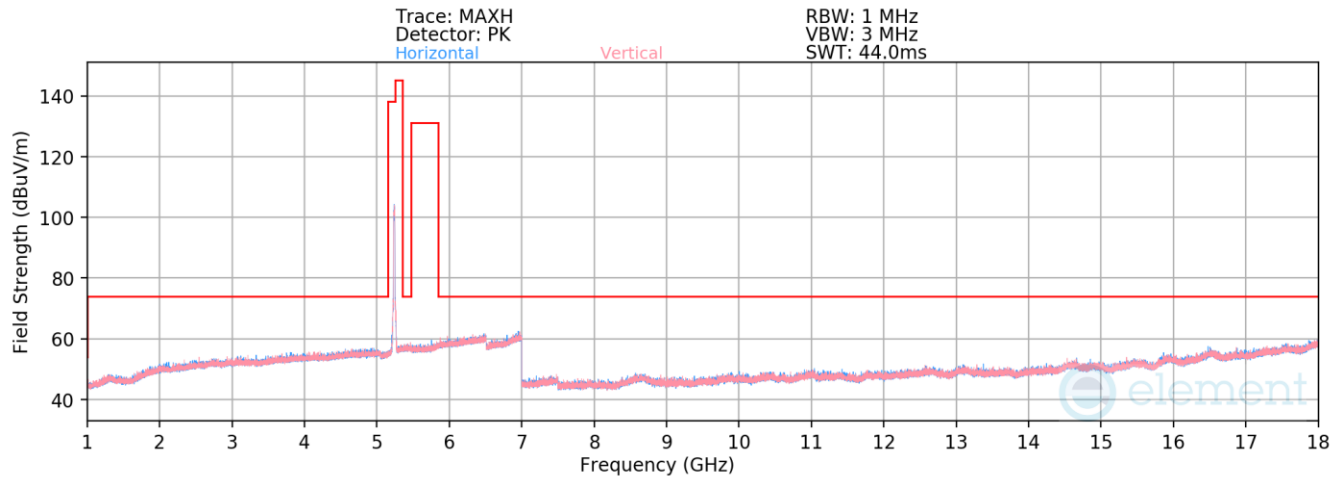

Plot 7-933. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11n – Ch. 48)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	H	-	-	-69.60	11.30	48.70	68.20	-19.50
* 15720.00	Average	H	-	-	-81.71	16.73	42.02	53.98	-11.96
* 15720.00	Peak	H	-	-	-71.34	16.73	52.39	73.98	-21.59

Table 7-272. Radiated Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 294 of 597

V 10.6 9/14/2023

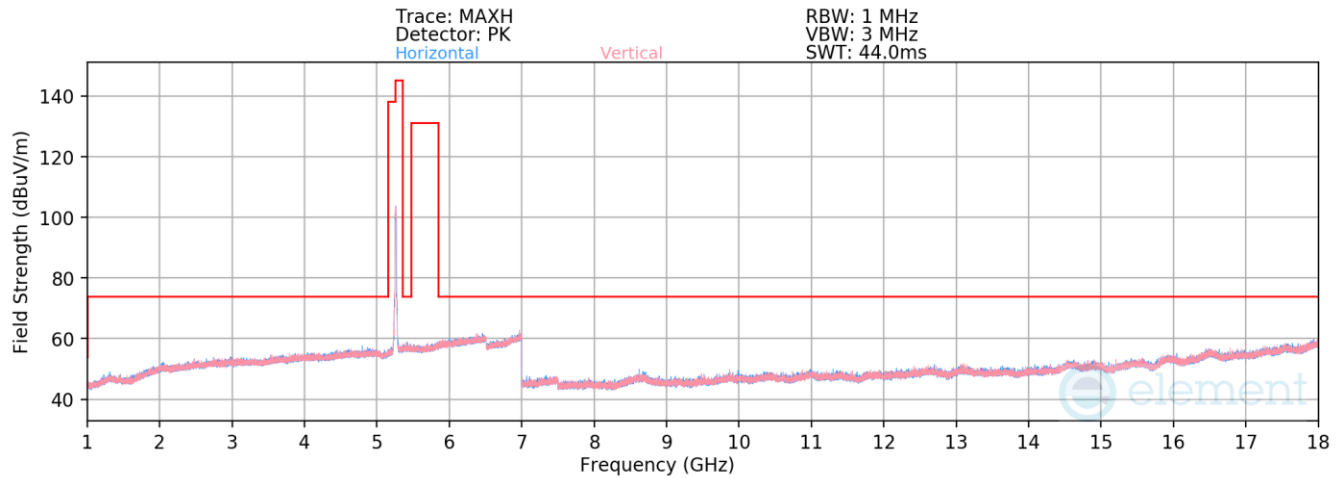

Plot 7-934. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11n – Ch. 52)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5260MHz
Channel: 52


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	H	-	-	-69.89	11.15	48.26	68.20	-19.94
* 15780.00	Average	H	-	-	-81.37	17.32	42.95	69.20	-26.25
* 15780.00	Peak	H	-	-	-71.22	17.32	53.10	70.20	-17.10

Table 7-273. Radiated Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 295 of 597

V 10.6 9/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

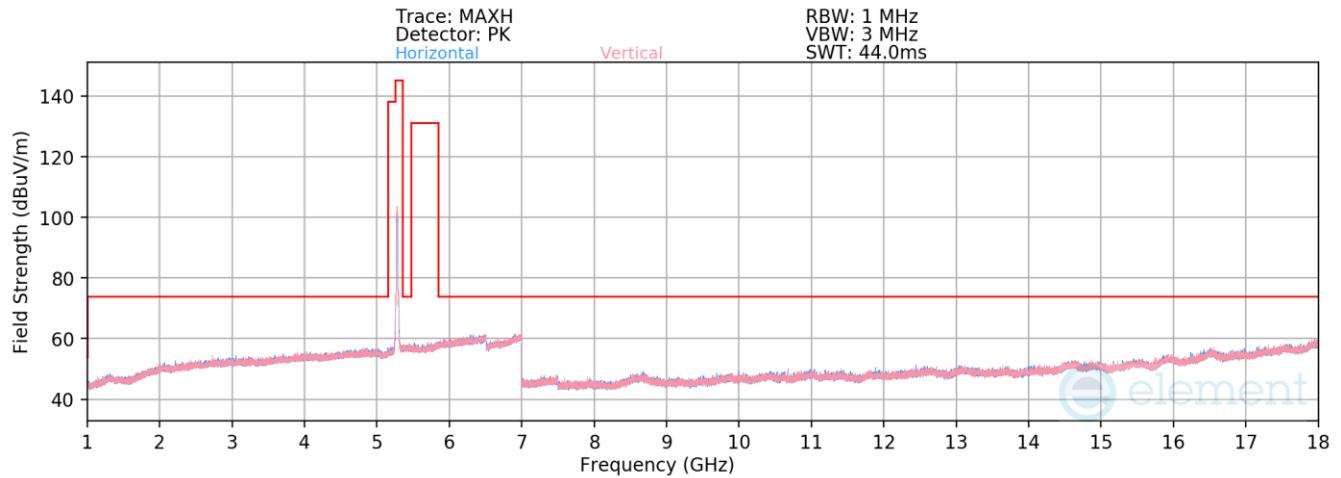

Plot 7-935. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11n – Ch. 56)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5280MHz
Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	H	-	-	-69.55	11.01	48.46	68.20	-19.74
* 15840.00	Average	H	-	-	-81.20	17.73	43.53	69.20	-25.67
* 15840.00	Peak	H	-	-	-70.90	17.73	53.83	70.20	-16.37

Table 7-274. Radiated Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 296 of 597

V 10.6 9/14/2023

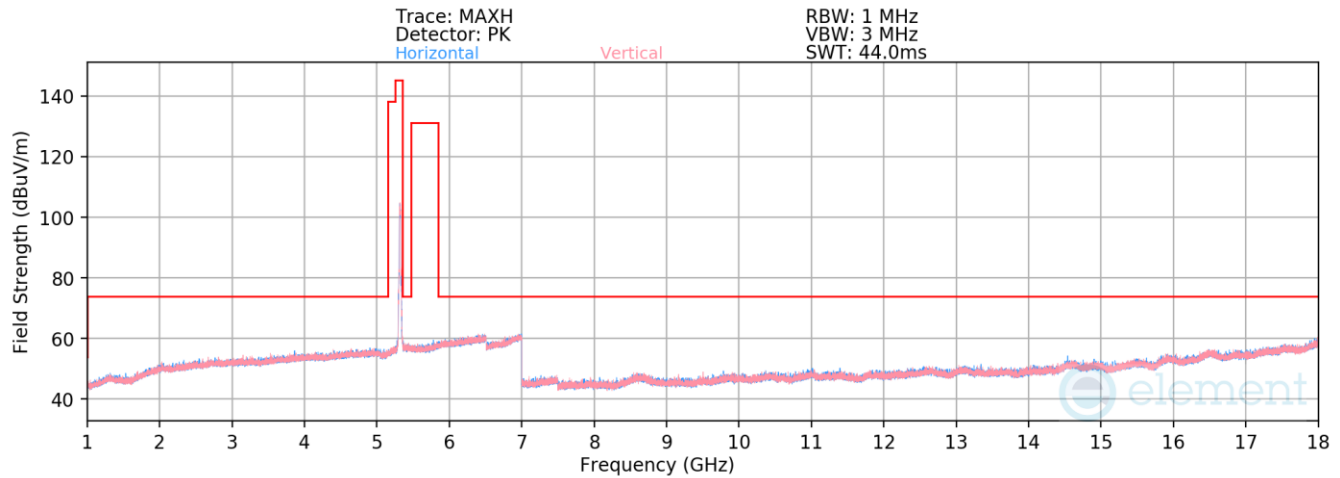

Plot 7-936. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11n – Ch. 64)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5320MHz
Channel: 64


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	10640.00	Average	H	-	-	-80.52	10.87	37.35	68.20	-30.85
*	10640.00	Peak	H	-	-	-69.70	10.87	48.17	69.20	-21.03
*	15960.00	Average	H	-	-	-81.52	17.92	43.40	70.20	-26.80
*	15960.00	Peak	H	-	-	-70.63	17.92	54.29	71.20	-16.91

Table 7-275. Radiated Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 297 of 597

V 10.6 9/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

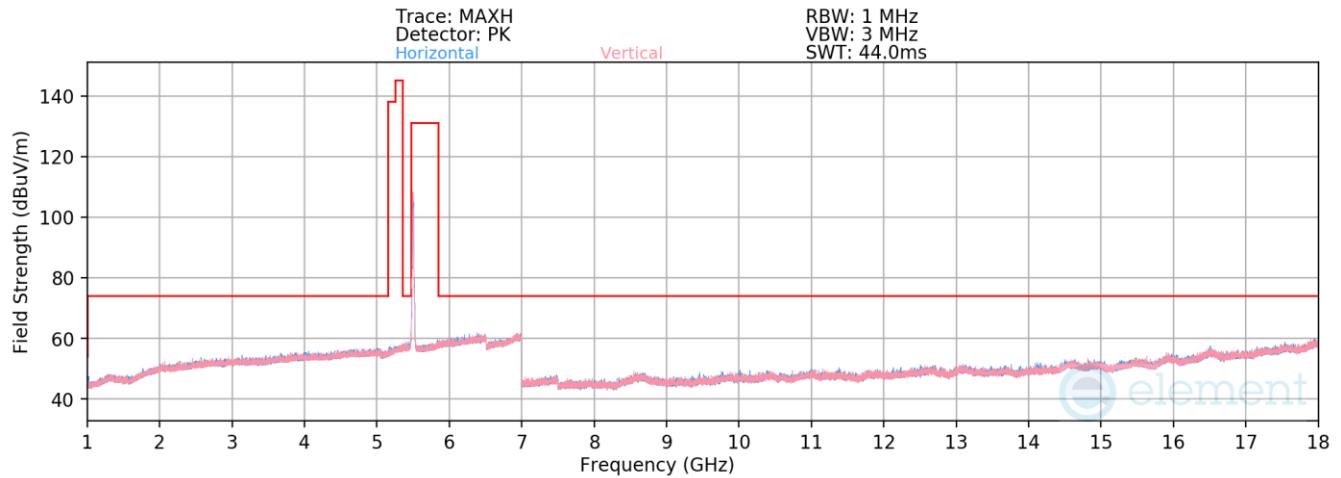

Plot 7-937. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11n – Ch. 100)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11000.00	Average	H	-	-	-80.49	12.10	38.61	68.20	-29.59
*	11000.00	Peak	H	-	-	-69.60	12.10	49.50	69.20	-19.70
	16500.00	Peak	H	-	-	-71.12	19.60	55.48	70.20	-14.72

Table 7-276. Radiated Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 298 of 597

V 10.6 9/14/2023

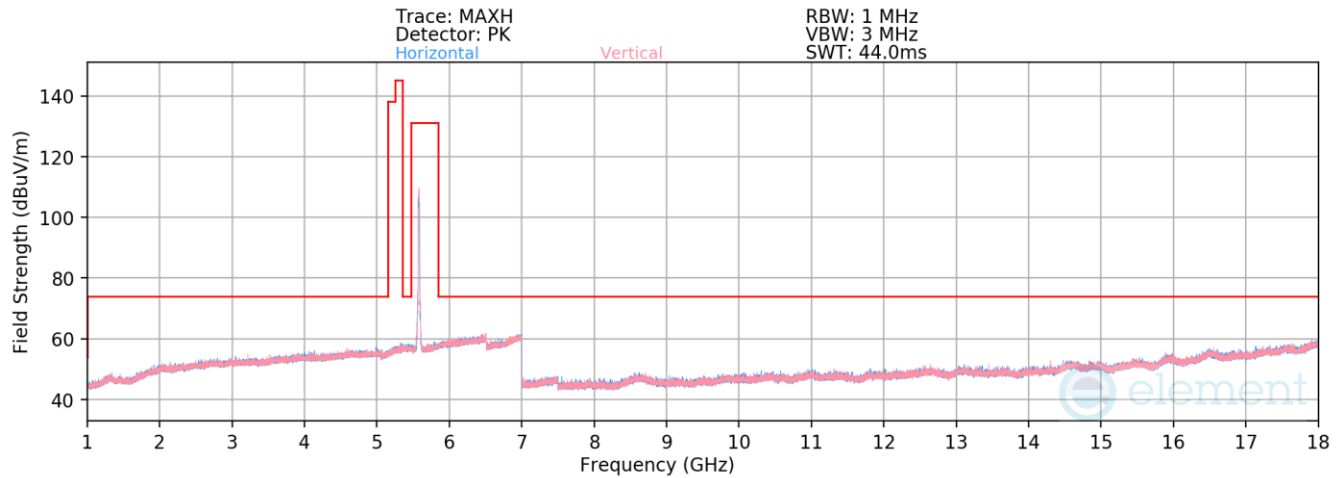

Plot 7-938. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11n – Ch. 116)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5580MHz
Channel: 116

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11160.00	Average	H	-	-	-80.35	11.29	37.94	68.20	-30.26
*	11160.00	Peak	H	-	-	-69.60	11.29	48.69	69.20	-20.51
	16740.00	Peak	H	-	-	-72.40	19.67	54.27	70.20	-15.93

Table 7-277. Radiated Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device		Page 299 of 597

V 10.6 9/14/2023

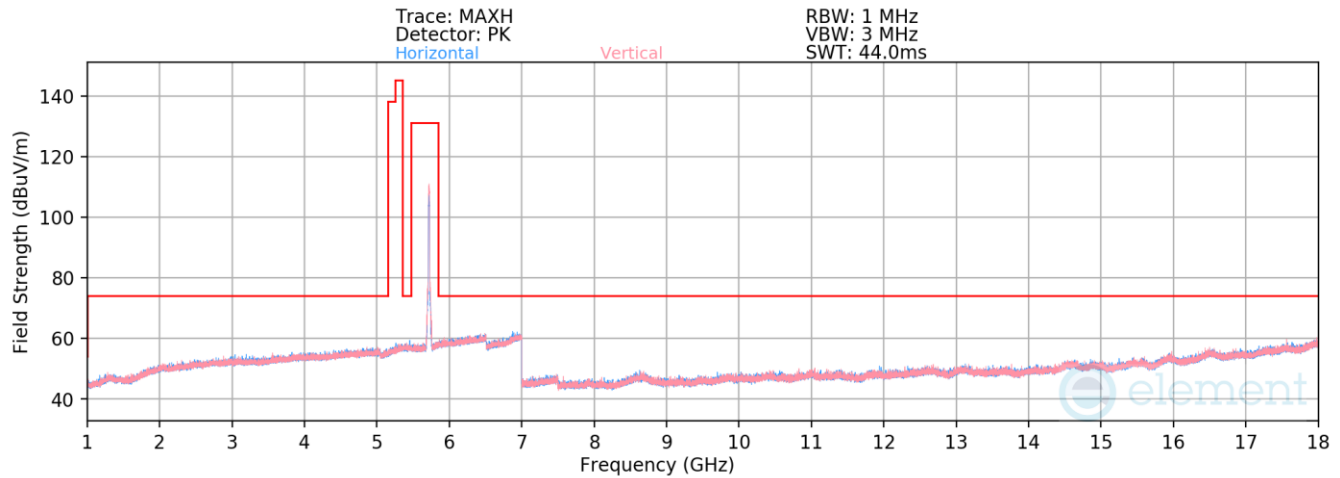

Plot 7-939. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11n – Ch. 144)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5720MHz
Channel: 144

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11440.00	Average	H	-	-	-80.65	12.05	38.40	68.20	-29.80
*	11440.00	Peak	H	-	-	-69.41	12.05	49.64	69.20	-19.56
	17160.00	Peak	H	-	-	-71.77	20.91	56.14	70.20	-14.06

Table 7-278. Radiated Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device		Page 300 of 597

V 10.6 9/14/2023

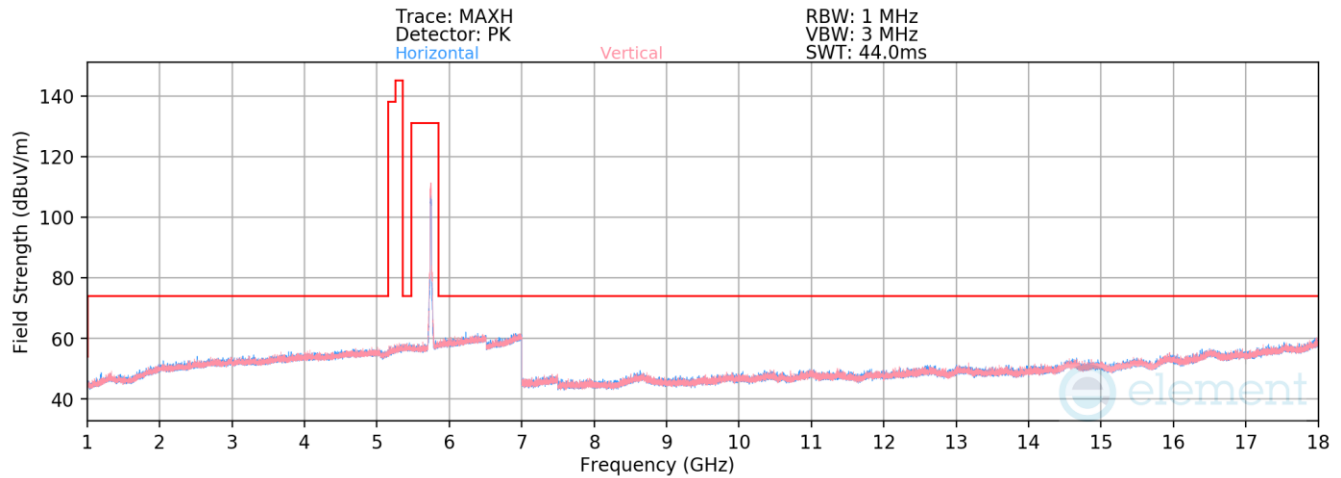

Plot 7-940. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11n – Ch. 149)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11490.00	Average	H	-	-	-80.86	11.97	38.11	68.20	-30.09
*	11490.00	Peak	H	-	-	-69.58	11.97	49.39	69.20	-19.81
	17235.00	Peak	H	-	-	-71.44	20.94	56.50	70.20	-13.70

Table 7-279. Radiated Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 301 of 597

V 10.6 9/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

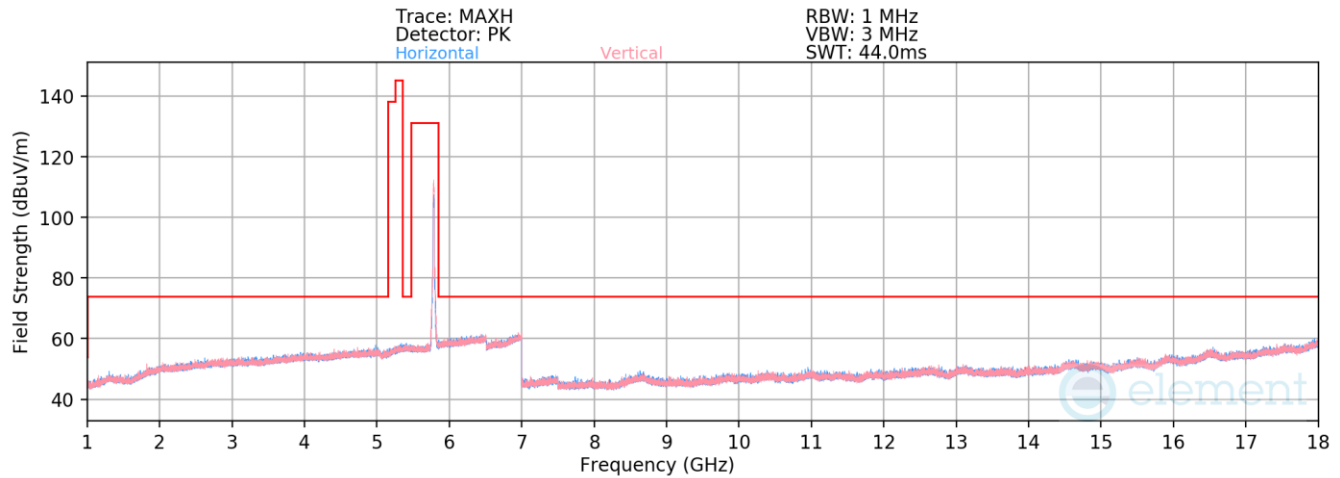

Plot 7-941. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11n – Ch. 157)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5785MHz
Channel: 157

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11570.00	Average	H	-	-	-79.49	11.29	38.80	68.20	-29.40
*	11570.00	Peak	H	-	-	-69.39	11.29	48.90	69.20	-20.30
	17355.00	Peak	H	-	-	-69.94	19.67	56.73	70.20	-13.47

Table 7-280. Radiated Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device		Page 302 of 597

V 10.6 9/14/2023

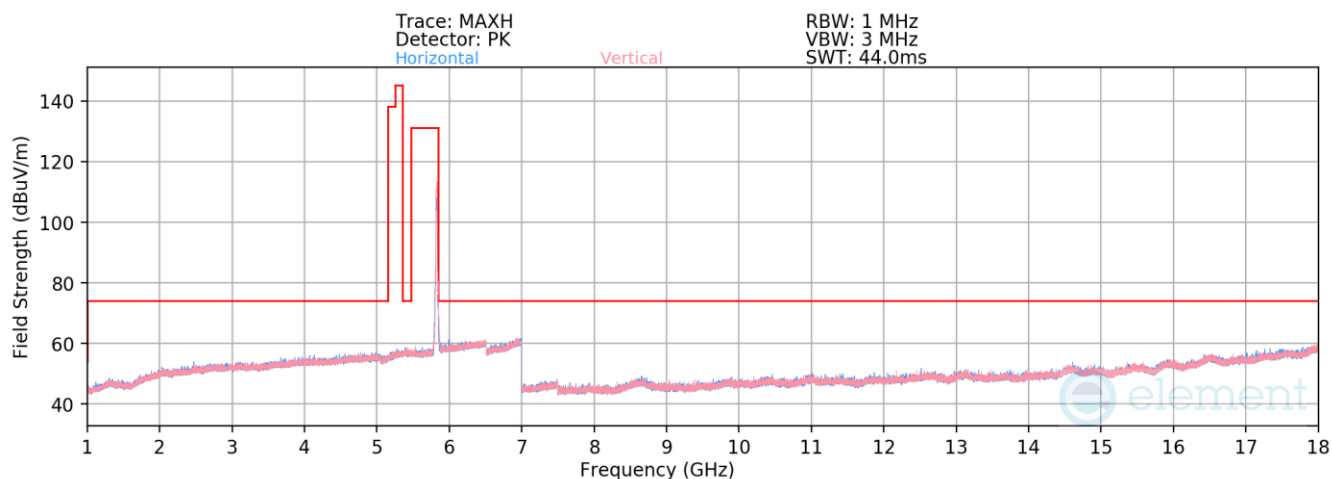

Plot 7-942. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11n – Ch. 165)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11650.00	Average	H	-	-	-80.49	12.05	38.56	68.20	-29.64
*	11650.00	Peak	H	-	-	-70.44	12.05	48.61	69.20	-20.59
	17475.00	Peak	H	-	-	-71.21	20.91	56.70	70.20	-13.50

Table 7-281. Radiated Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device		Page 303 of 597

V 10.6 9/14/2023

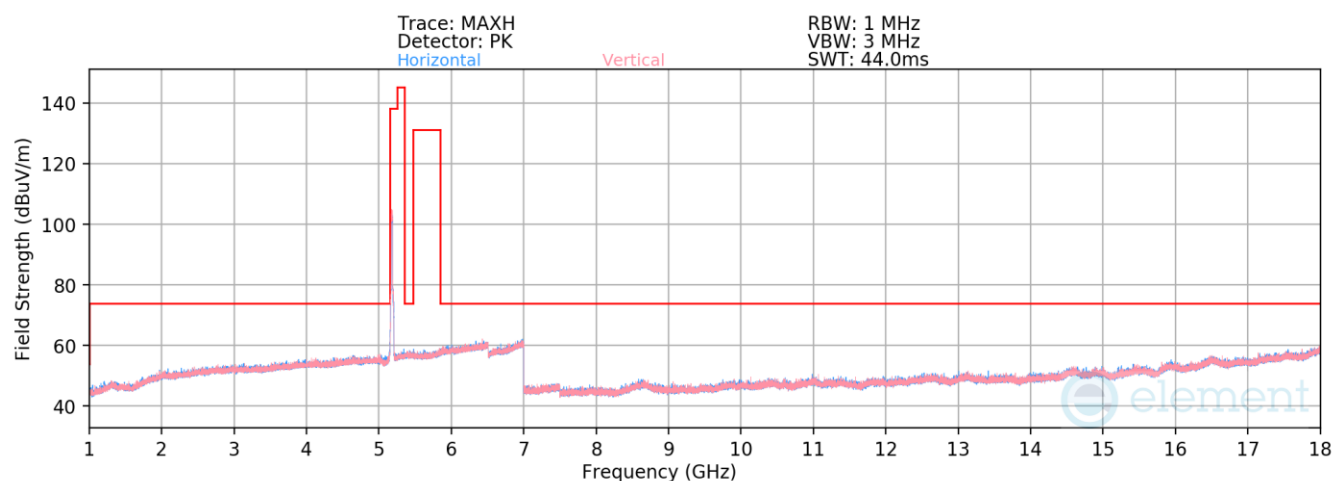

Plot 7-943. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11ax(SU) – Ch. 36)


Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5180MHz
Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	Peak	H	-	-	-69.83	11.14	48.31	68.20	-19.89
* 15540.00	Average	H	-	-	-81.89	17.36	42.47	53.98	-11.51
* 15540.00	Peak	H	-	-	-71.51	17.36	52.85	73.98	-21.13

Table 7-282. Radiated Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 304 of 597

V 10.6 9/14/2023

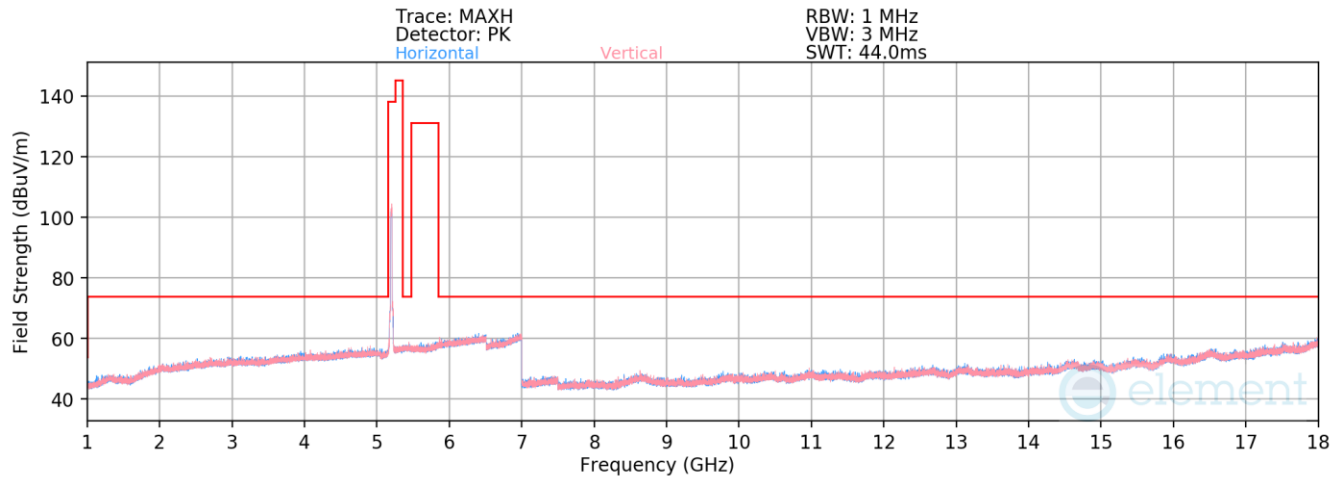

Plot 7-944. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11ax(SU) – Ch. 40)


Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5200MHz
Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	Peak	H	-	-	-68.97	11.20	49.23	68.20	-18.97
* 15600.00	Average	H	-	-	-81.60	17.11	42.51	53.98	-11.47
* 15600.00	Peak	H	-	-	-71.53	17.11	52.58	73.98	-21.40

Table 7-283. Radiated Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 305 of 597

V 10.6 9/14/2023

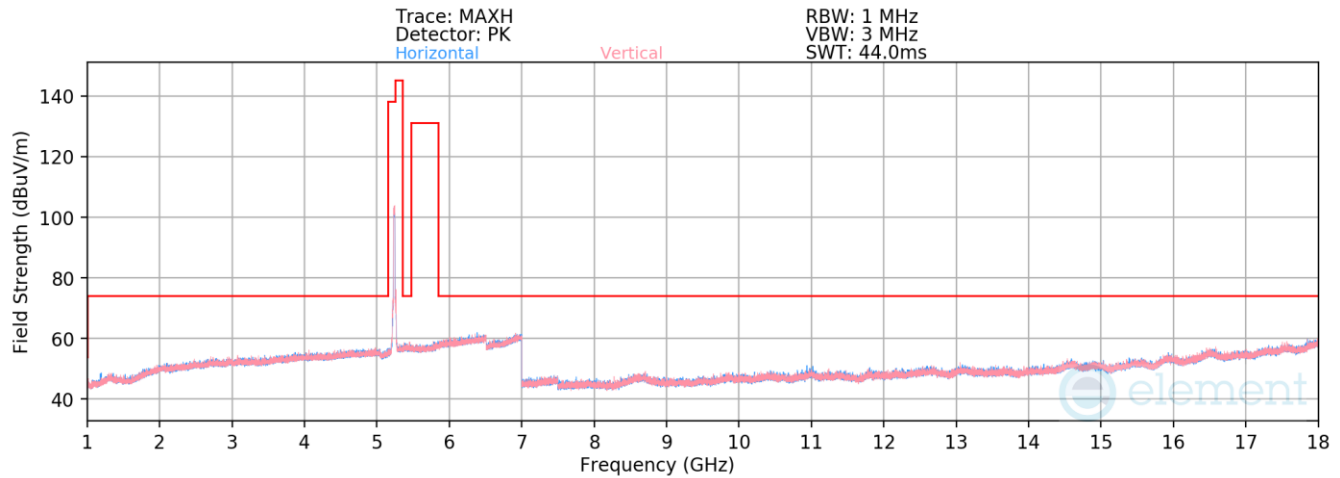

Plot 7-945. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11ax(SU) – Ch. 48)


Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	H	-	-	-69.83	11.30	48.47	68.20	-19.73
* 15720.00	Average	H	-	-	-80.55	16.73	43.18	53.98	-10.80
* 15720.00	Peak	H	-	-	-70.50	16.73	53.23	73.98	-20.75

Table 7-284. Radiated Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 306 of 597

V 10.6 9/14/2023

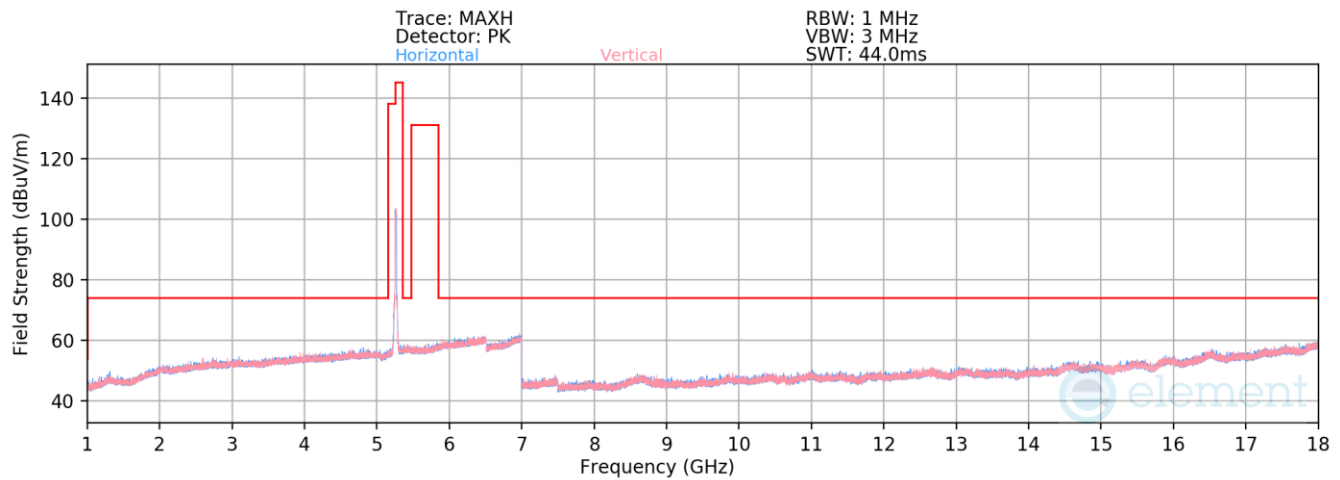

Plot 7-946. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11ax(SU) – Ch. 52)


Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5260MHz
Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	H	-	-	-69.87	11.15	48.28	68.20	-19.92
* 15780.00	Average	H	-	-	-81.56	17.32	42.76	53.98	-11.22
* 15780.00	Peak	H	-	-	-71.48	17.32	52.84	73.98	-21.14

Table 7-285. Radiated Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 307 of 597

V 10.6 9/14/2023

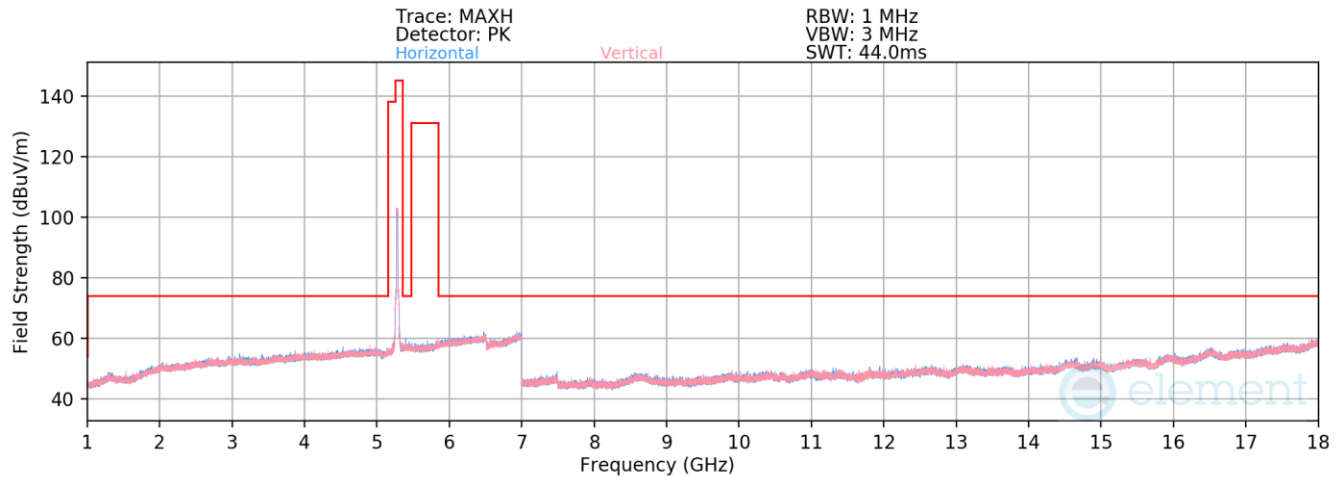

Plot 7-947. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11ax(SU) – Ch. 56)


Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5280MHz
Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	H	-	-	-69.69	11.01	48.32	68.20	-19.88
* 15840.00	Average	H	-	-	-81.29	17.73	43.44	53.98	-10.54
* 15840.00	Peak	H	-	-	-69.75	17.73	54.98	73.98	-19.00

Table 7-286. Radiated Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 308 of 597

V 10.6 9/14/2023

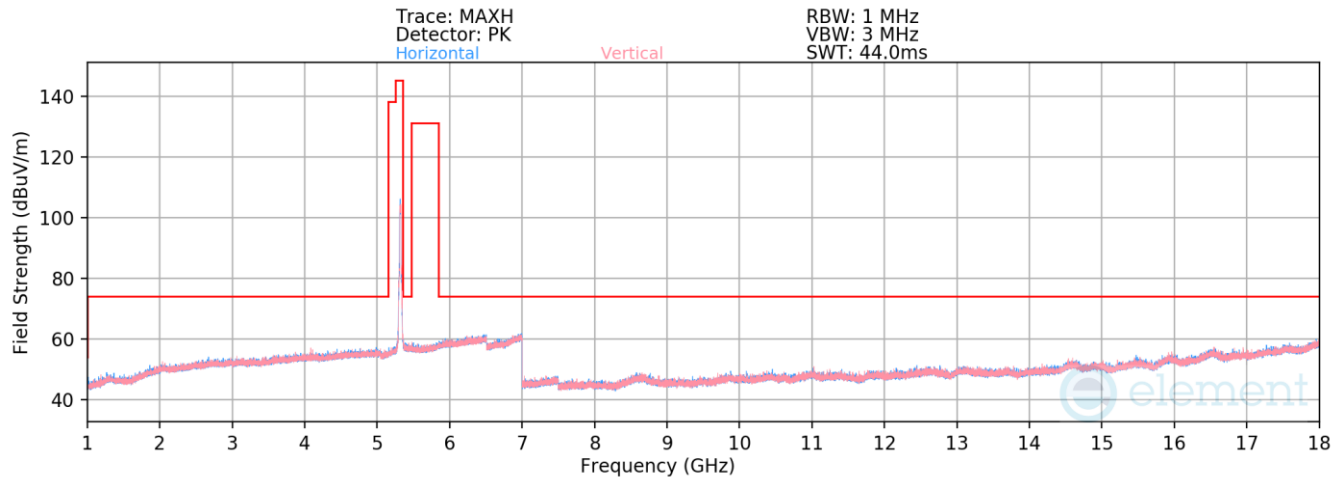


Plot 7-948. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11ax(SU) – Ch. 64)

Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5320MHz
Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	H	-	-	-80.12	10.87	37.75	53.98	-16.23
* 10640.00	Peak	H	-	-	-69.53	10.87	48.34	73.98	-25.64
* 15960.00	Average	H	-	-	-81.48	17.92	43.44	53.98	-10.54
* 15960.00	Peak	H	-	-	-70.53	17.92	54.39	73.98	-19.59

Table 7-287. Radiated Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 309 of 597

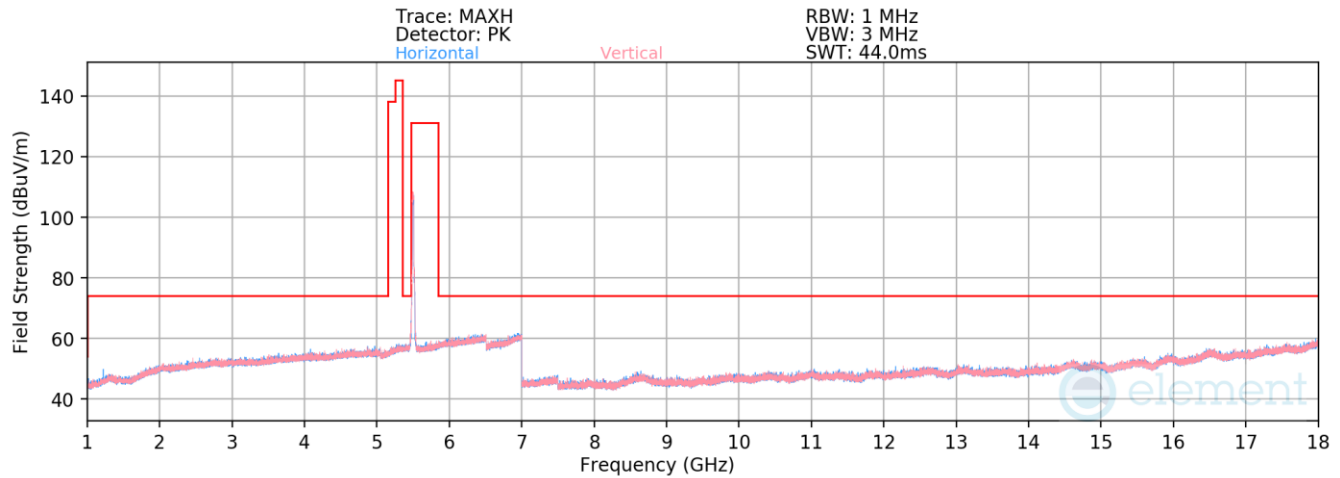

Plot 7-949. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11ax(SU) – Ch. 100)


Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11000.00	Average	H	-	-	-80.65	12.10	38.45	53.98	-15.53
*	11000.00	Peak	H	-	-	-70.40	12.10	48.70	73.98	-25.28
	16500.00	Peak	H	-	-	-70.68	19.60	55.92	68.20	-12.28

Table 7-288. Radiated Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device		Page 310 of 597

V 10.6 9/14/2023

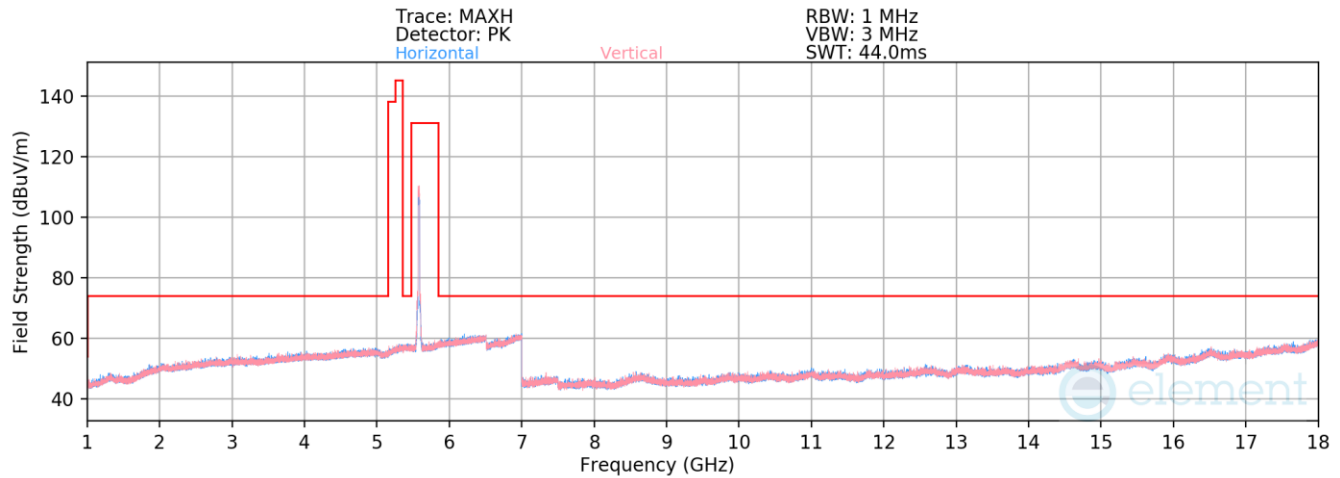

Plot 7-950. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11ax(SU) – Ch. 116)


Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5580MHz
Channel: 116

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11160.00	Average	H	-	-	-80.49	11.29	37.80	53.98	-16.18
*	11160.00	Peak	H	-	-	-68.74	11.29	49.55	73.98	-24.43
	16740.00	Peak	H	-	-	-72.69	19.67	53.98	68.20	-14.22

Table 7-289. Radiated Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 311 of 597

V 10.6 9/14/2023

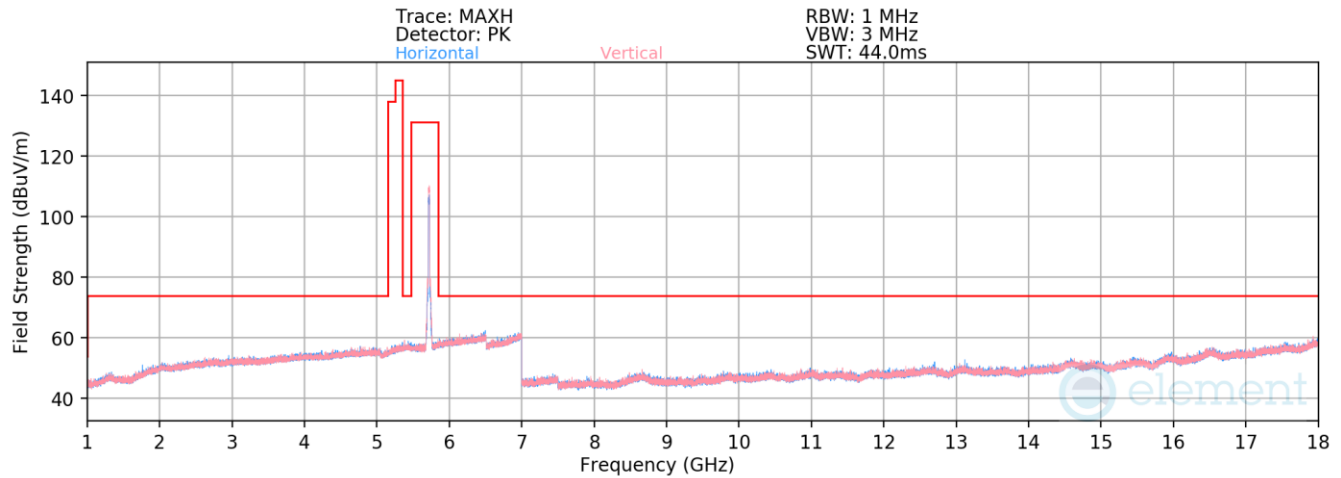

Plot 7-951. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11ax(SU) – Ch. 144)


Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5720MHz
Channel: 144

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11440.00	Average	H	-	-	-80.67	12.05	38.38	53.98	-15.60
*	11440.00	Peak	H	-	-	-70.09	12.05	48.96	73.98	-25.02
	17160.00	Peak	H	-	-	-71.83	20.91	56.08	68.20	-12.12

Table 7-290. Radiated Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 312 of 597

V 10.6 9/14/2023

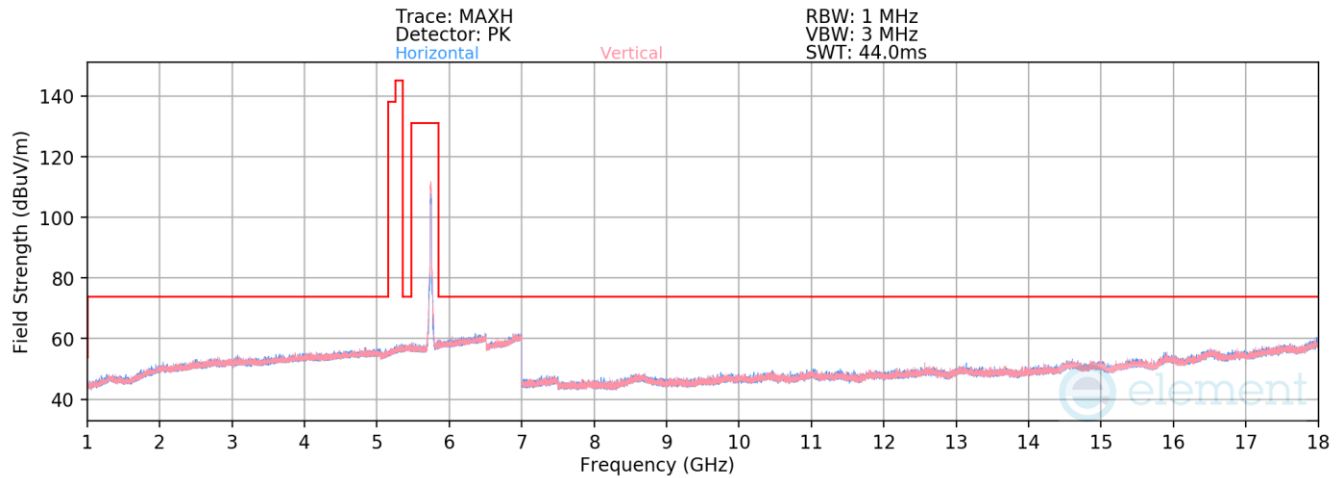

Plot 7-952. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11ax(SU) – Ch. 149)


Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11490.00	Average	H	-	-	-80.03	11.97	38.94	53.98	-15.04
*	11490.00	Peak	H	-	-	-69.90	11.97	49.07	73.98	-24.91
	17235.00	Peak	H	-	-	-71.33	20.94	56.61	68.20	-11.59

Table 7-291. Radiated Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device		Page 313 of 597

V 10.6 9/14/2023

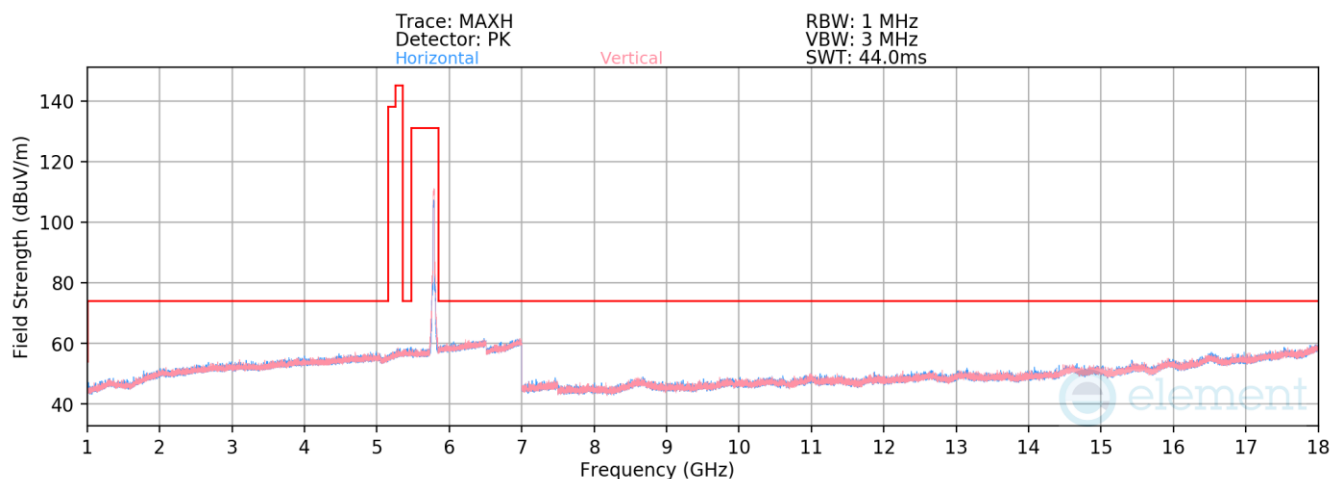

Plot 7-953. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11ax(SU) – Ch. 157)


Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5785MHz
Channel: 157

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11570.00	Average	H	-	-	-81.30	12.07	37.77	53.98	-16.21
*	11570.00	Peak	H	-	-	-70.01	12.07	49.06	73.98	-24.92
	17355.00	Peak	H	-	-	-71.63	21.01	56.38	68.20	-11.82

Table 7-292. Radiated Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device		Page 314 of 597

V 10.6 9/14/2023

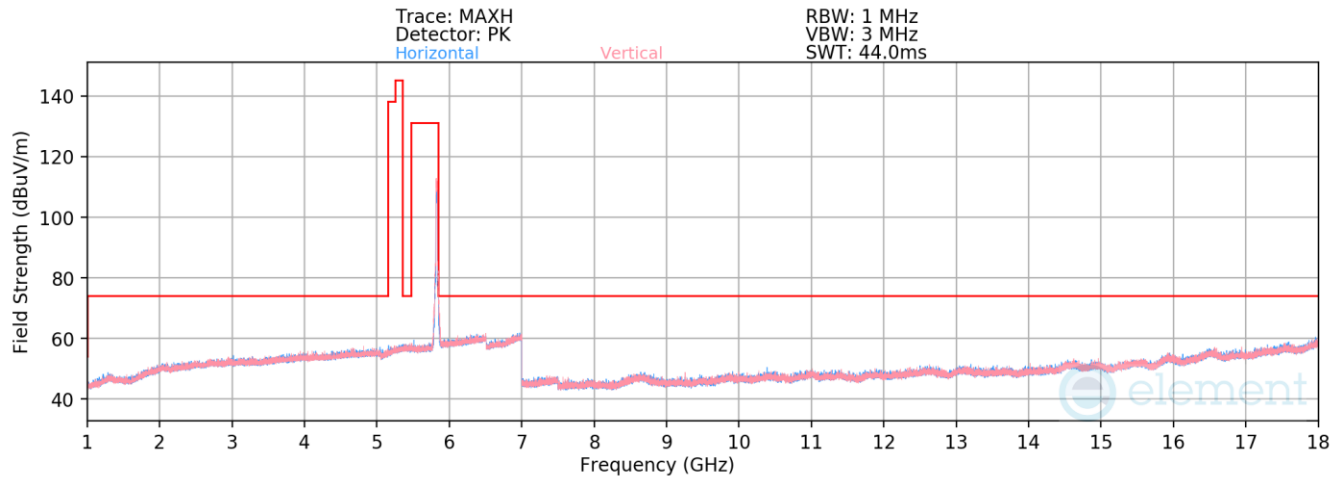

Plot 7-954. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11ax(SU) – Ch. 165)

Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11650.00	Average	H	-	-	-81.43	11.97	37.54	53.98	-16.44
*	11650.00	Peak	H	-	-	-70.45	11.97	48.52	73.98	-25.46
	17475.00	Peak	H	-	-	-71.57	21.83	57.26	68.20	-10.94


Table 7-293. Radiated Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 315 of 597

V 10.6 9/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.6.3 Antenna 1b Radiated Spurious Emission

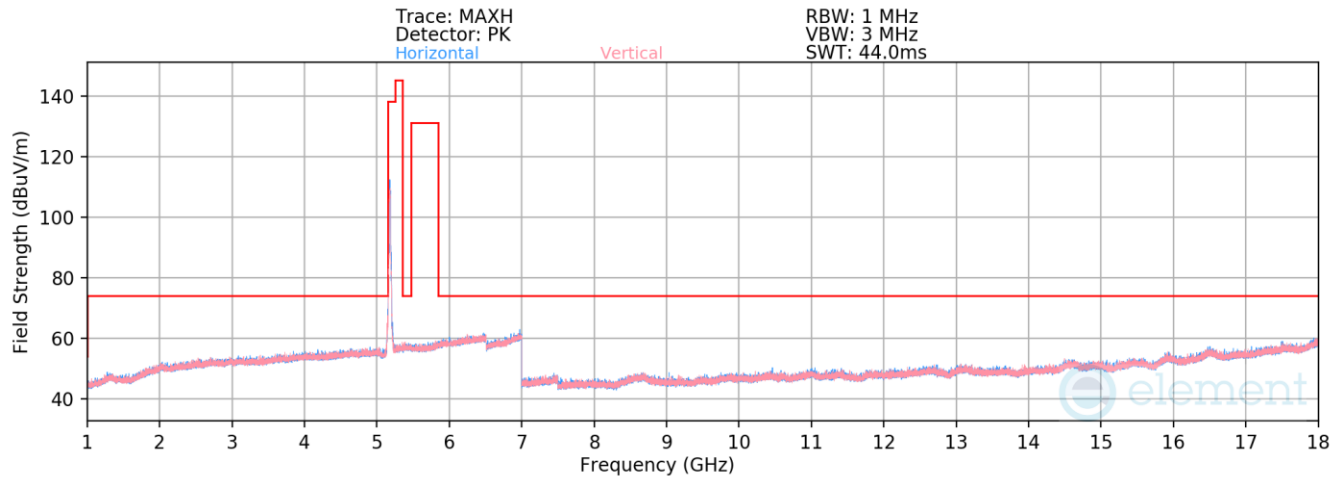

Plot 7-955. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11n – Ch. 36)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5180MHz
Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	Peak	H	-	-	-69.79	11.14	48.35	68.20	-19.85
* 15540.00	Average	H	-	-	-81.72	17.36	42.64	53.98	-11.34
* 15540.00	Peak	H	-	-	-70.69	17.36	53.67	73.98	-20.31

Table 7-294. Radiated Measurements Antenna 1b

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 316 of 597

V 10.6 9/14/2023

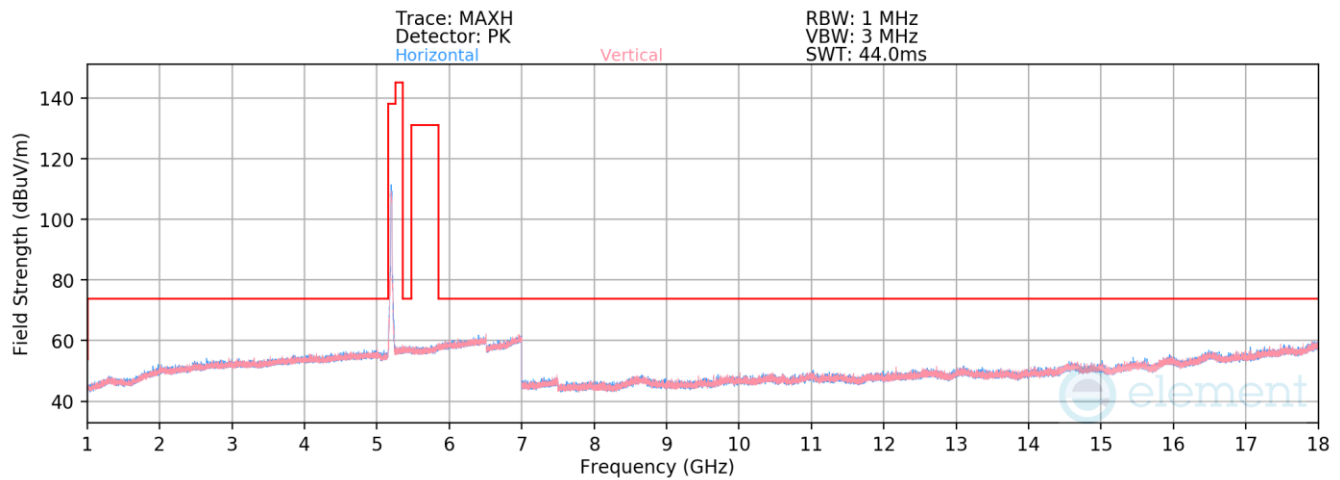

Plot 7-956. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11n – Ch. 40)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5200MHz
Channel: 40


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	Peak	H	-	-	-69.69	11.20	48.51	68.20	-19.69
* 15600.00	Average	H	-	-	-81.68	17.11	42.43	53.98	-11.55
* 15600.00	Peak	H	-	-	-70.85	17.11	53.26	73.98	-20.72

Table 7-295. Radiated Measurements Antenna 1b

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 317 of 597

V 10.6 9/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

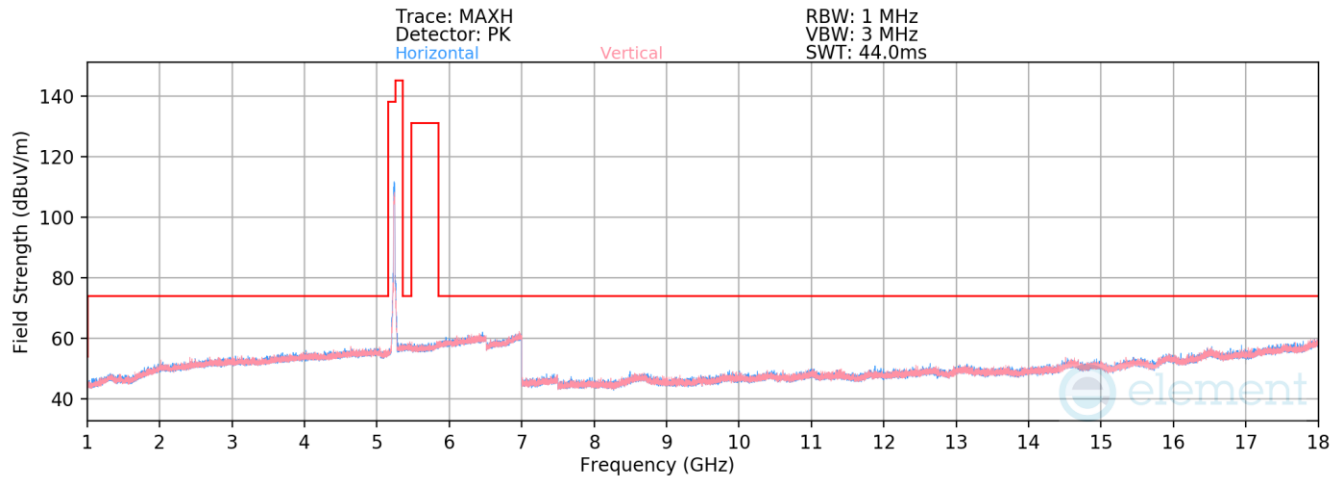

Plot 7-957. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11n – Ch. 48)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5240MHz
Channel: 48


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	H	-	-	-69.73	11.30	48.57	68.20	-19.63
* 15720.00	Average	H	-	-	-80.14	16.73	43.59	53.98	-10.39
* 15720.00	Peak	H	-	-	-70.03	16.73	53.70	73.98	-20.28

Table 7-296. Radiated Measurements Antenna 1b

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 318 of 597

V 10.6 9/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

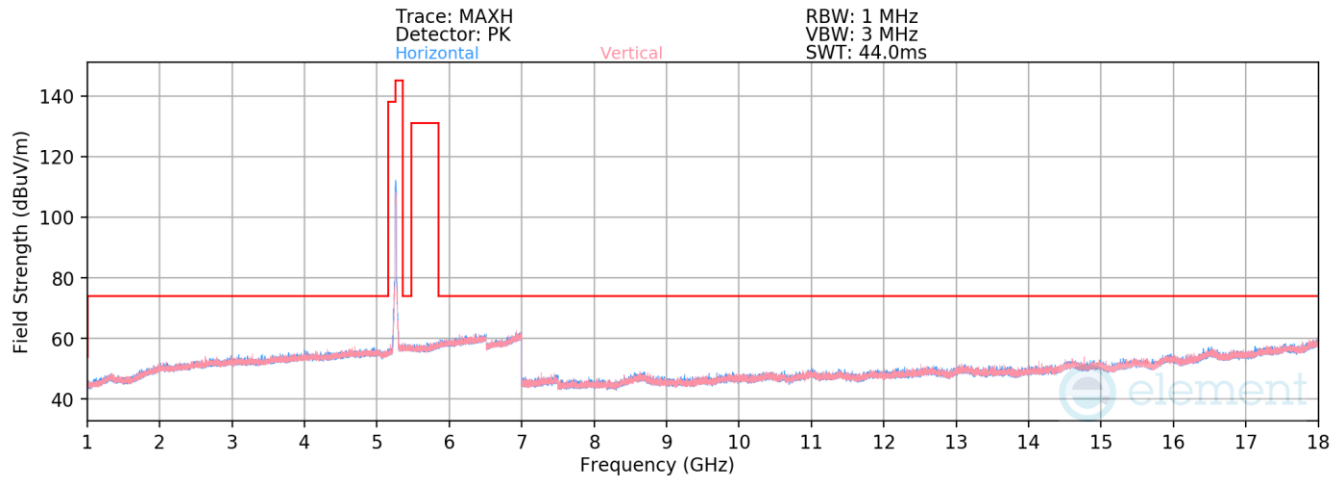

Plot 7-958. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11n – Ch. 52)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5260MHz
Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	H	-	-	-69.83	11.15	48.32	68.20	-19.88
* 15780.00	Average	H	-	-	-82.32	17.32	42.00	69.20	-27.20
* 15780.00	Peak	H	-	-	-70.89	17.32	53.43	70.20	-16.77

Table 7-297. Radiated Measurements Antenna 1b

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 319 of 597

V 10.6 9/14/2023

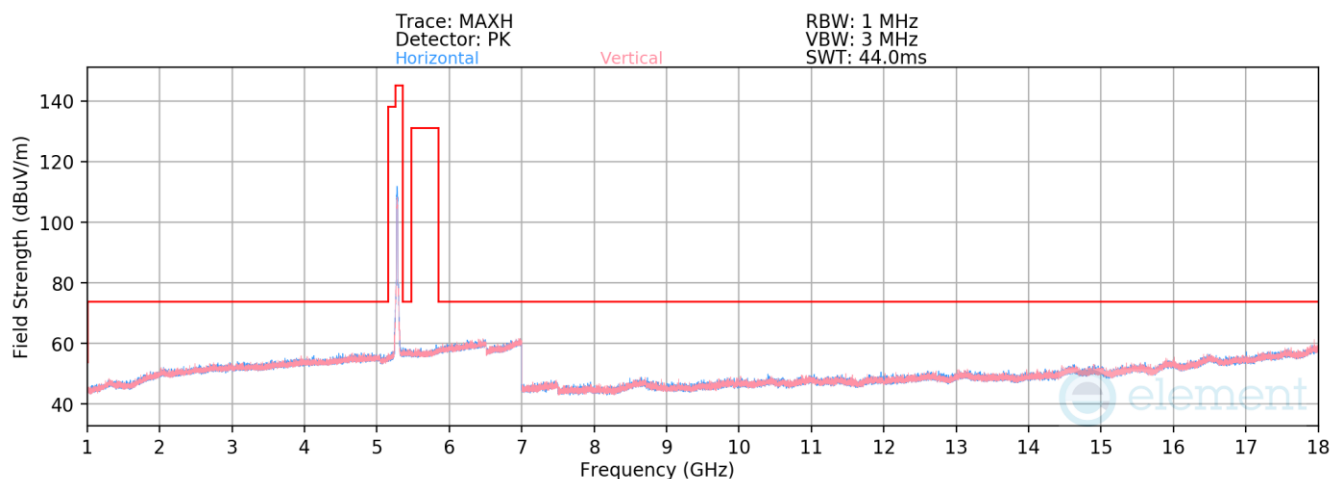

Plot 7-959. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11n – Ch. 56)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5280MHz
Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	H	-	-	-69.42	11.01	48.59	68.20	-19.61
* 15840.00	Average	H	-	-	-81.06	17.73	43.67	69.20	-25.53
* 15840.00	Peak	H	-	-	-70.00	17.73	54.73	70.20	-15.47

Table 7-298. Radiated Measurements Antenna 1b

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 320 of 597

V 10.6 9/14/2023

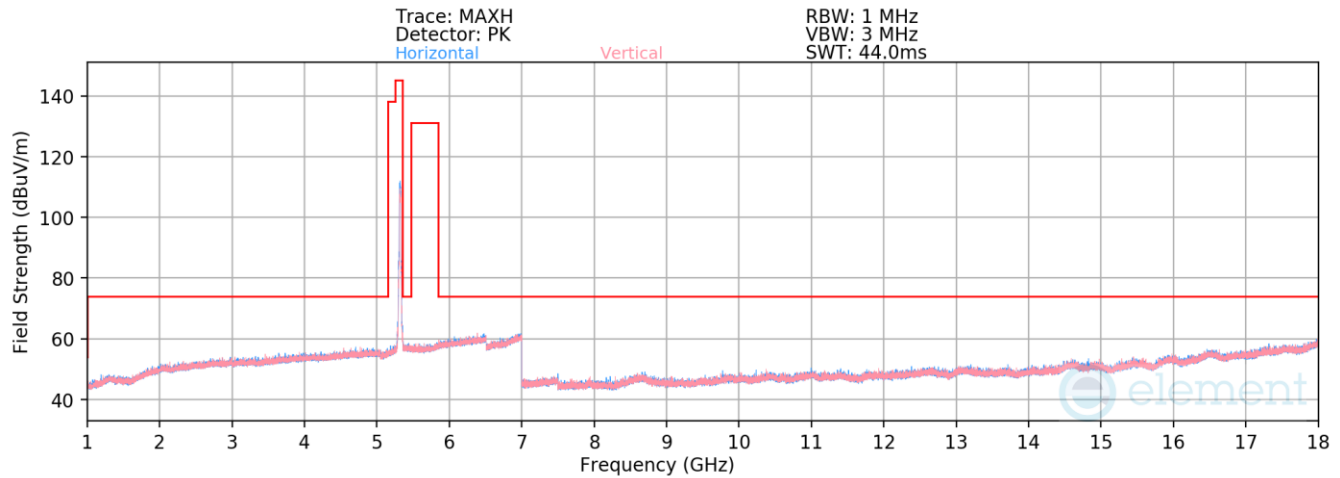

Plot 7-960. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11n – Ch. 64)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5320MHz
Channel: 64


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	10640.00	Average	H	-	-	-80.41	10.87	37.46	68.20	-30.74
*	10640.00	Peak	H	-	-	-69.45	10.87	48.42	69.20	-20.78
*	15960.00	Average	H	-	-	-81.45	17.92	43.47	70.20	-26.73
*	15960.00	Peak	H	-	-	-70.17	17.92	54.75	71.20	-16.45

Table 7-299. Radiated Measurements Antenna 1b

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 321 of 597

V 10.6 9/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

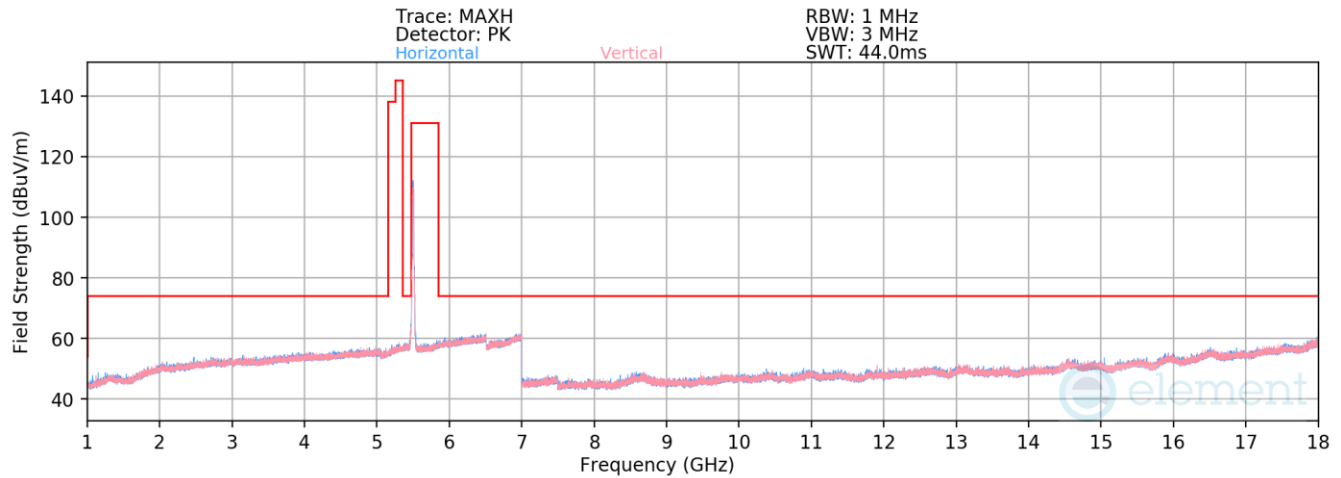

Plot 7-961. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11n – Ch. 100)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11000.00	Average	H	-	-	-80.23	12.10	38.87	68.20	-29.33
*	11000.00	Peak	H	-	-	-69.98	12.10	49.12	69.20	-20.08
	16500.00	Peak	H	-	-	-70.87	19.60	55.73	70.20	-14.47

Table 7-300. Radiated Measurements Antenna 1b

FCC ID: BCGA2903 IC: 579C-A2903			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device		Page 322 of 597

V 10.6 9/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

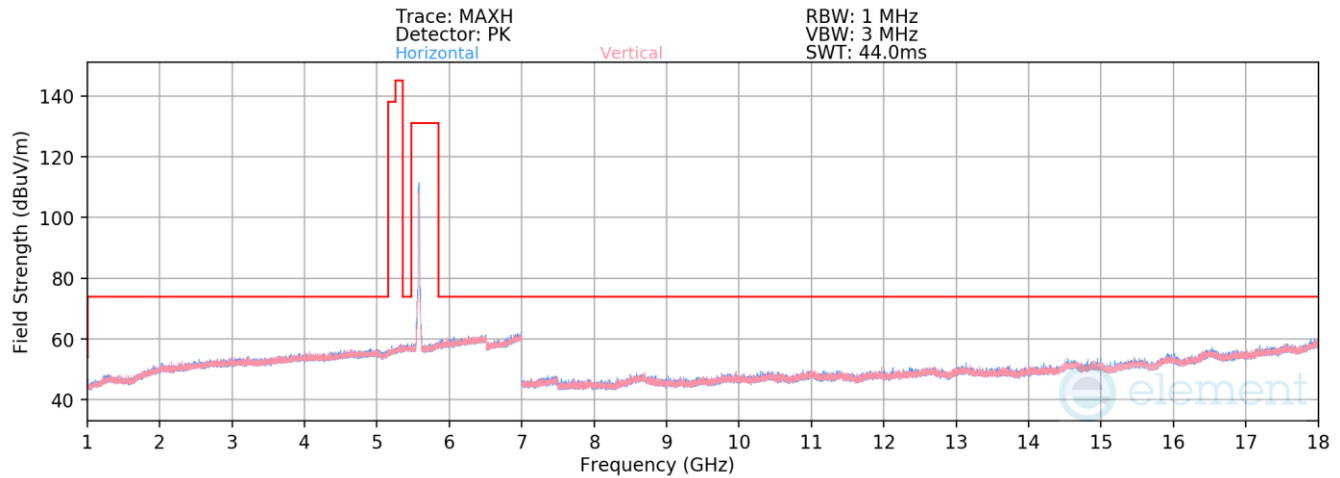

Plot 7-962. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11n – Ch. 116)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5580MHz
Channel: 116

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11160.00	Average	H	-	-	-80.36	11.29	37.93	68.20	-30.27
*	11160.00	Peak	H	-	-	-70.18	11.29	48.11	69.20	-21.09
	16740.00	Peak	H	-	-	-72.06	19.67	54.61	70.20	-15.59

Table 7-301. Radiated Measurements Antenna 1b

FCC ID: BCGA2903 IC: 579C-A2903			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device		Page 323 of 597

V 10.6 9/14/2023

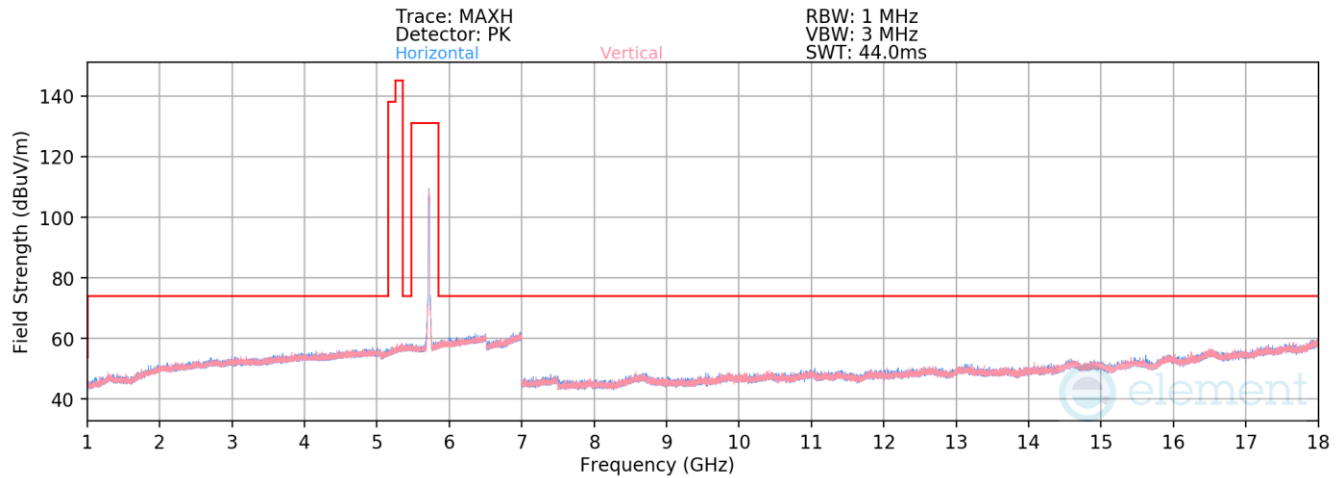

Plot 7-963. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11n – Ch. 144)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5720MHz
Channel: 144


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11440.00	Average	H	-	-	-80.61	12.05	38.44	68.20	-29.76
*	11440.00	Peak	H	-	-	-69.65	12.05	49.40	69.20	-19.80
	17160.00	Peak	H	-	-	-71.30	20.91	56.61	70.20	-13.59

Table 7-302. Radiated Measurements Antenna 1b

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 324 of 597

V 10.6 9/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

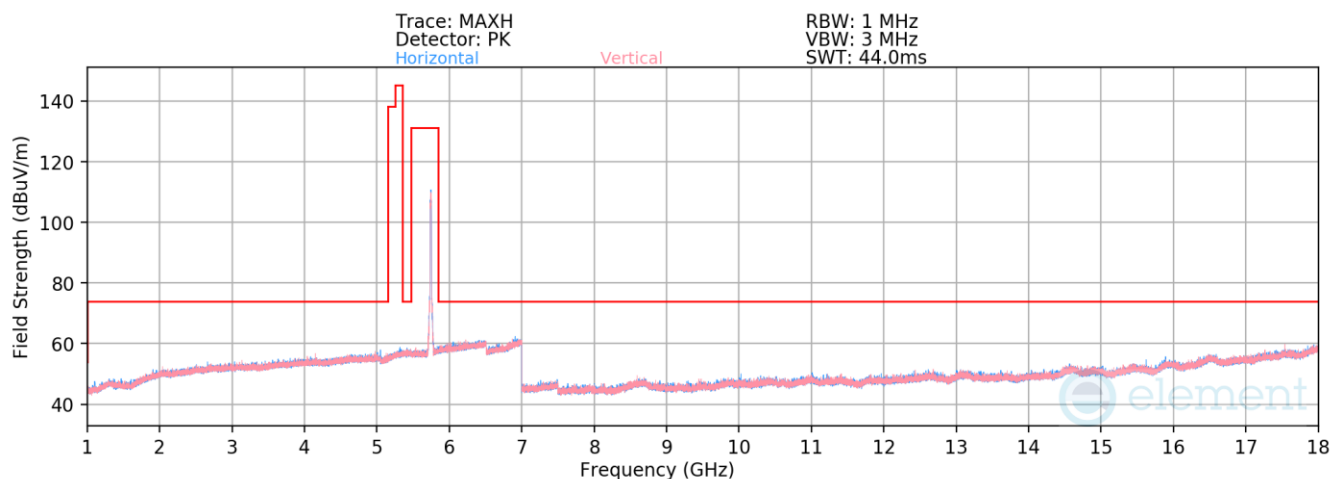

Plot 7-964. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11n – Ch. 149)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11490.00	Average	H	-	-	-80.48	11.97	38.49	68.20	-29.71
*	11490.00	Peak	H	-	-	-70.32	11.97	48.65	69.20	-20.55
	17235.00	Peak	H	-	-	-71.74	20.94	56.20	70.20	-14.00

Table 7-303. Radiated Measurements Antenna 1b

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 325 of 597

V 10.6 9/14/2023

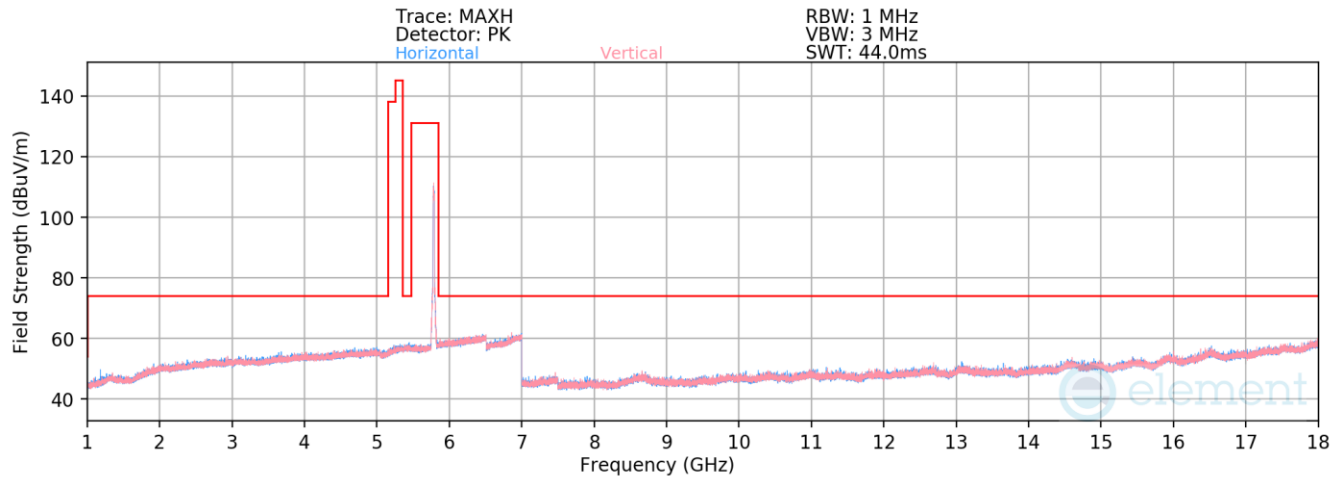

Plot 7-965. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11n – Ch. 157)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5785MHz
Channel: 157

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11570.00	Average	H	-	-	-80.41	11.29	37.88	68.20	-30.32
*	11570.00	Peak	H	-	-	-69.65	11.29	48.64	69.20	-20.56
	17355.00	Peak	H	-	-	-70.35	19.67	56.32	70.20	-13.88

Table 7-304. Radiated Measurements Antenna 1b

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 326 of 597

V 10.6 9/14/2023

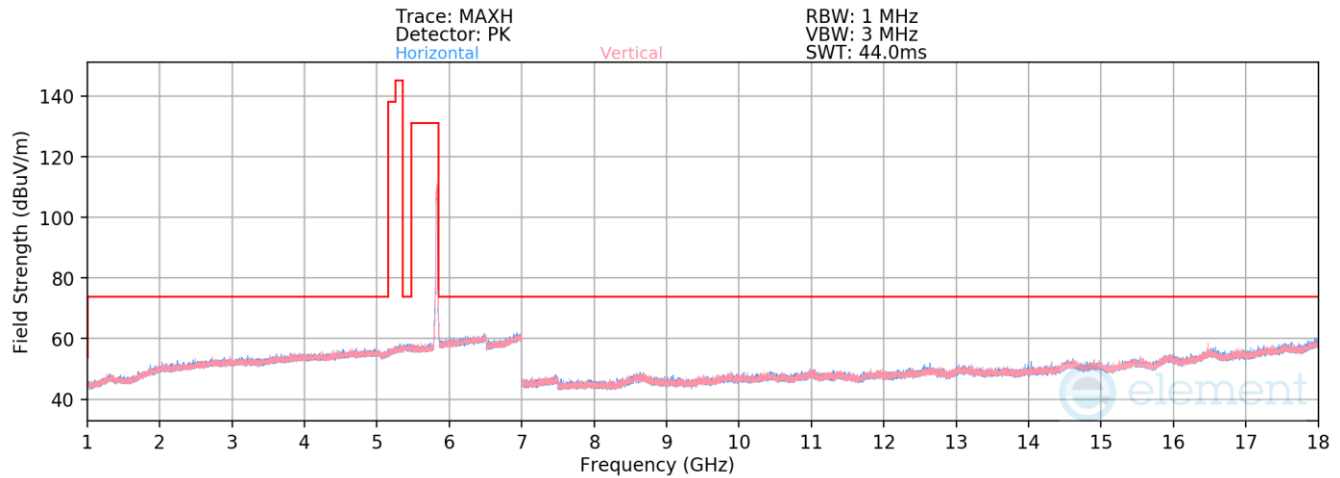

Plot 7-966. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11n – Ch. 165)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11650.00	Average	H	-	-	-80.57	12.05	38.48	68.20	-29.72
*	11650.00	Peak	H	-	-	-70.44	12.05	48.61	69.20	-20.59
	17475.00	Peak	H	-	-	-71.24	20.91	56.67	70.20	-13.53

Table 7-305. Radiated Measurements Antenna 1b

FCC ID: BCGA2903 IC: 579C-A2903			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device		Page 327 of 597

V 10.6 9/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

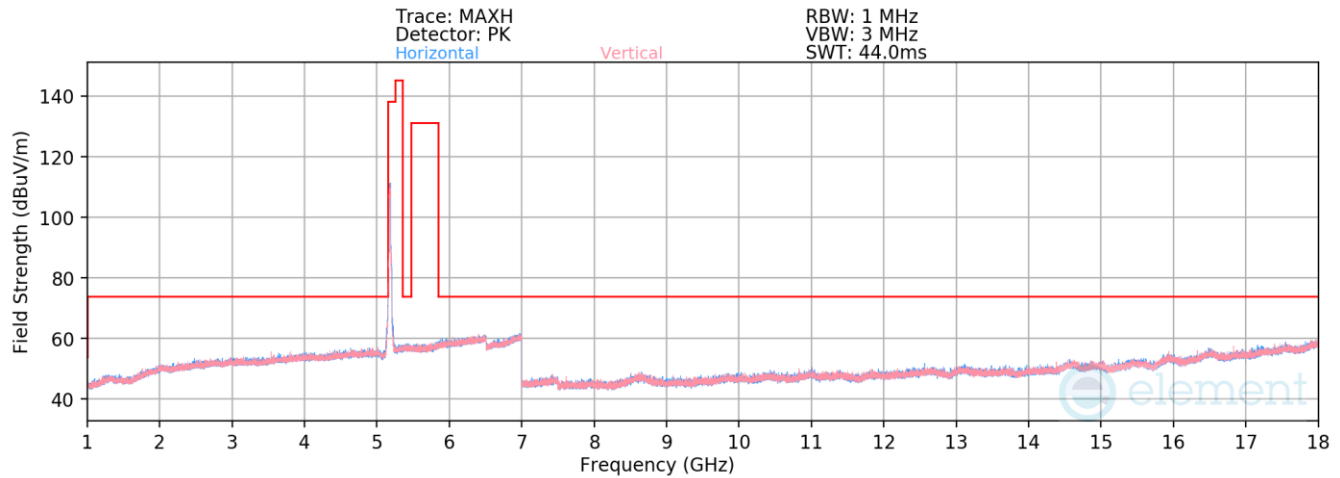

Plot 7-967. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11ax(SU) – Ch. 36)

Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5180MHz
Channel: 36


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	Peak	H	-	-	-69.18	11.14	48.96	68.20	-19.24
* 15540.00	Average	H	-	-	-81.81	17.36	42.55	53.98	-11.43
* 15540.00	Peak	H	-	-	-71.10	17.36	53.26	73.98	-20.72

Table 7-306. Radiated Measurements Antenna 1b

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 328 of 597

V 10.6 9/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

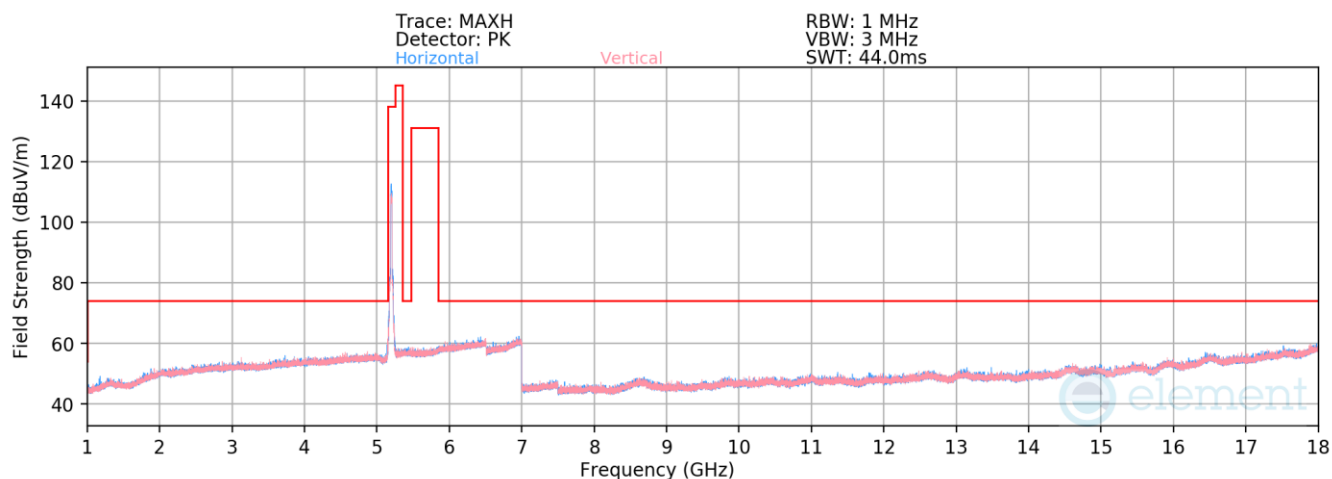

Plot 7-968. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11ax(SU) – Ch. 40)


Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5200MHz
Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	Peak	H	-	-	-69.70	11.20	48.50	68.20	-19.70
* 15600.00	Average	H	-	-	-81.34	17.11	42.77	53.98	-11.21
* 15600.00	Peak	H	-	-	-71.24	17.11	52.87	73.98	-21.11

Table 7-307. Radiated Measurements Antenna 1b

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 329 of 597

V 10.6 9/14/2023

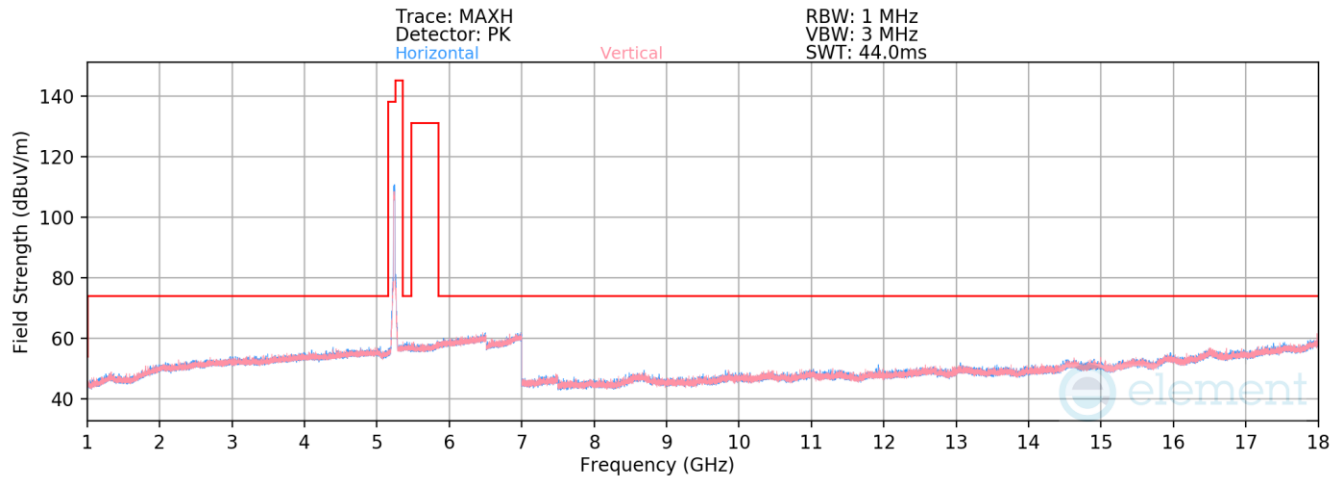

Plot 7-969. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11ax(SU) – Ch. 48)

Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5240MHz
Channel: 48


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	H	-	-	-69.92	11.30	48.38	68.20	-19.82
* 15720.00	Average	H	-	-	-82.14	16.73	41.59	53.98	-12.39
* 15720.00	Peak	H	-	-	-71.60	16.73	52.13	73.98	-21.85

Table 7-308. Radiated Measurements Antenna 1b

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 330 of 597

V 10.6 9/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

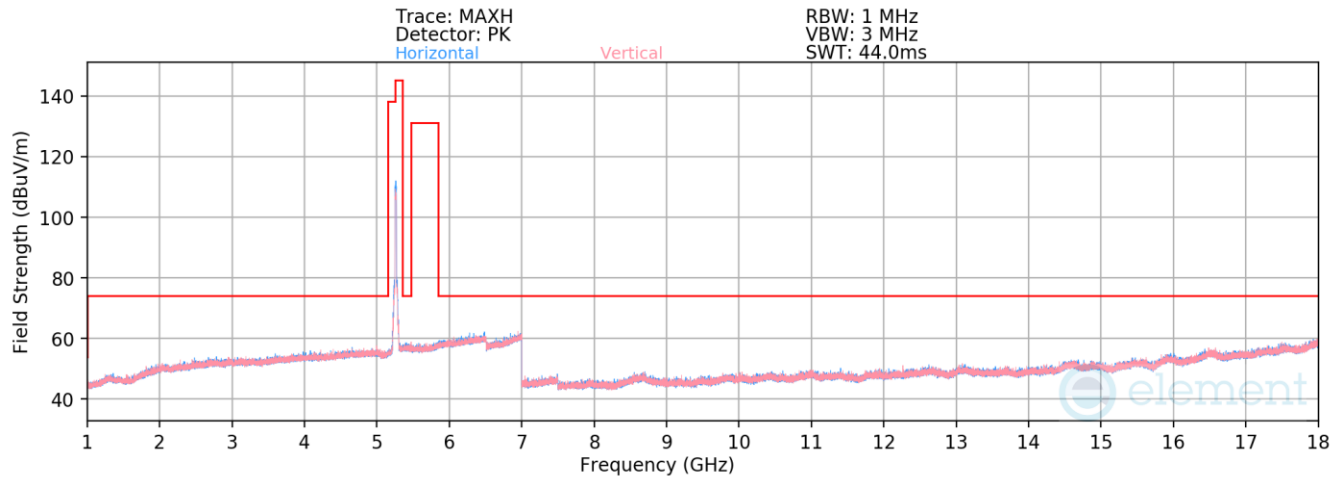

Plot 7-970. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11ax(SU) – Ch. 52)

Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5260MHz
Channel: 52


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	H	-	-	-70.16	11.15	47.99	68.20	-20.21
* 15780.00	Average	H	-	-	-81.15	17.32	43.17	53.98	-10.81
* 15780.00	Peak	H	-	-	-70.96	17.32	53.36	73.98	-20.62

Table 7-309. Radiated Measurements Antenna 1b

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 331 of 597

V 10.6 9/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

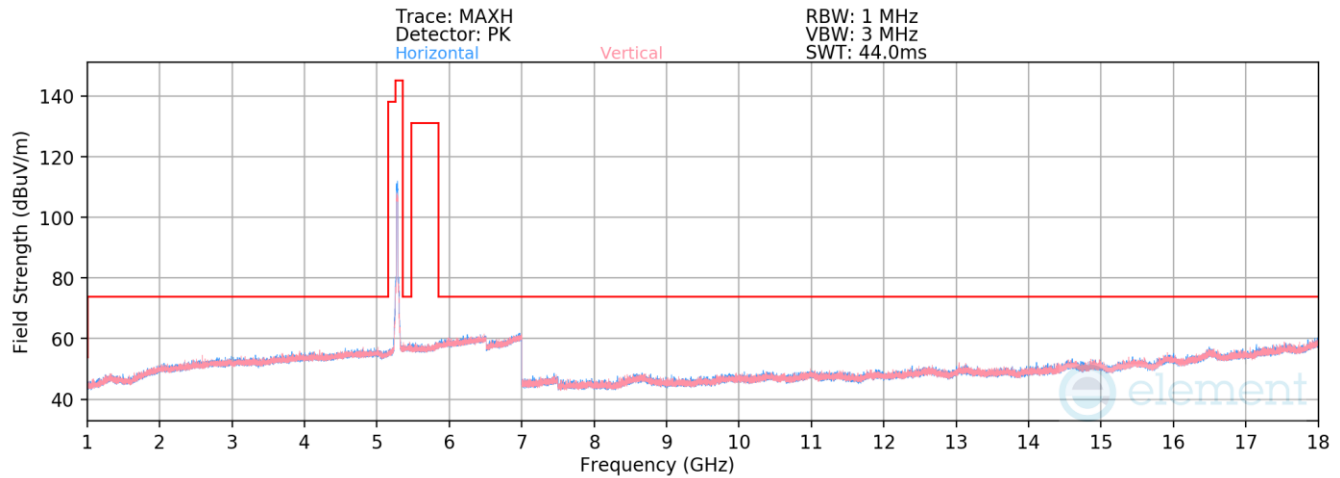

Plot 7-971. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11ax(SU) – Ch. 56)


Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5280MHz
Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	H	-	-	-69.67	11.01	48.34	68.20	-19.86
* 15840.00	Average	H	-	-	-80.97	17.73	43.76	53.98	-10.22
* 15840.00	Peak	H	-	-	-70.80	17.73	53.93	73.98	-20.05

Table 7-310. Radiated Measurements Antenna 1b

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 332 of 597

V 10.6 9/14/2023

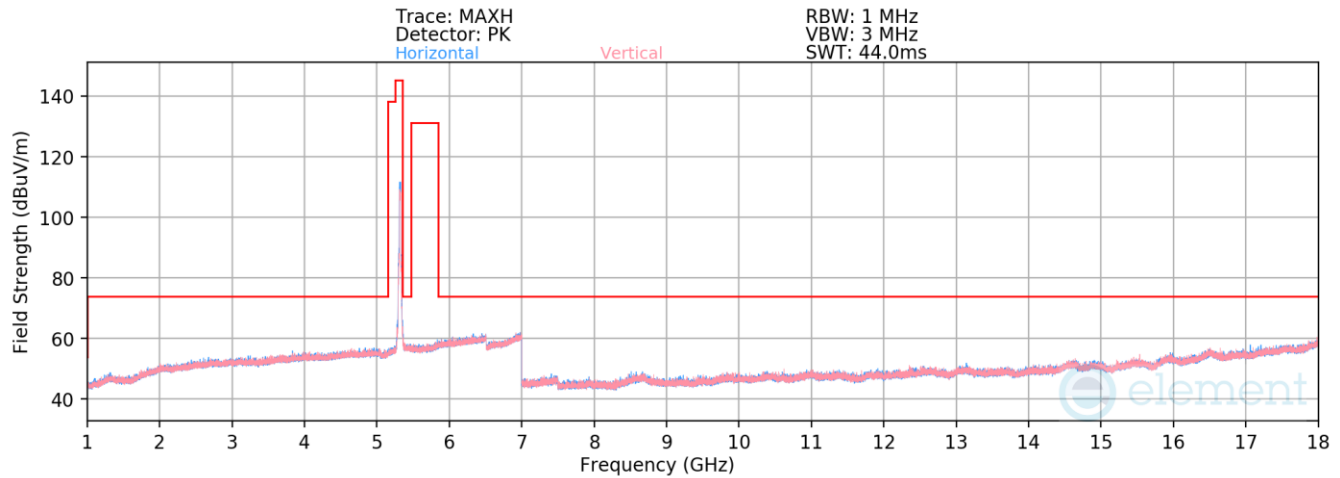

Plot 7-972. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11ax(SU) – Ch. 64)

Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5320MHz
Channel: 64


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	10640.00	Average	H	-	-	-79.95	10.87	37.92	53.98	-16.06
*	10640.00	Peak	H	-	-	-69.78	10.87	48.09	73.98	-25.89
*	15960.00	Average	H	-	-	-81.57	17.92	43.35	53.98	-10.63
*	15960.00	Peak	H	-	-	-71.29	17.92	53.63	73.98	-20.35

Table 7-311. Radiated Measurements Antenna 1b

FCC ID: BCGA2903 IC: 579C-A2903			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device		Page 333 of 597

V 10.6 9/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

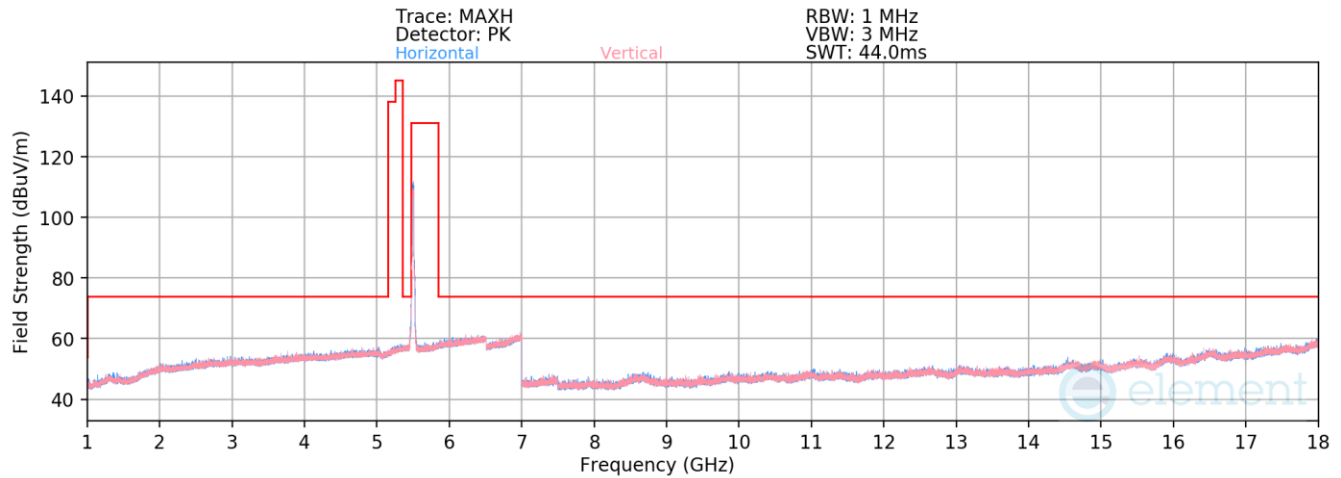

Plot 7-973. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11ax(SU) – Ch. 100)

Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	H	-	-	-81.33	12.10	37.77	53.98	-16.21
* 11000.00	Peak	H	-	-	-70.27	12.10	48.83	73.98	-25.15
16500.00	Peak	H	-	-	-71.17	19.60	55.43	68.20	-12.77

Table 7-312. Radiated Measurements Antenna 1b

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 334 of 597

V 10.6 9/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

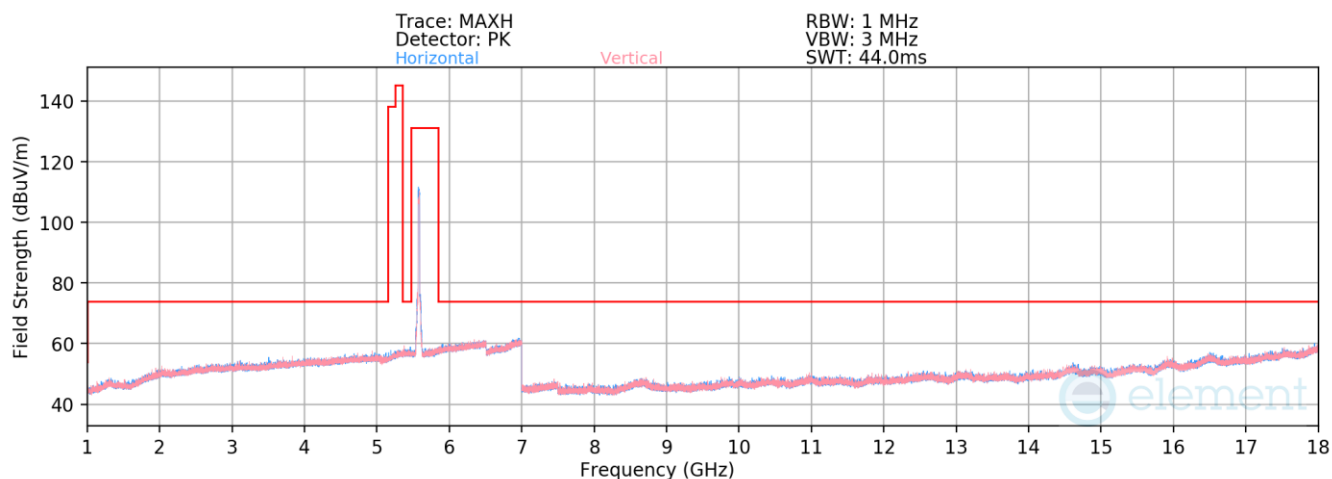

Plot 7-974. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11ax(SU) – Ch. 116)


Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5580MHz
Channel: 116

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11160.00	Average	H	-	-	-80.34	11.29	37.95	53.98	-16.03
*	11160.00	Peak	H	-	-	-69.49	11.29	48.80	73.98	-25.18
	16740.00	Peak	H	-	-	-71.95	19.67	54.72	68.20	-13.48

Table 7-313. Radiated Measurements Antenna 1b

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 335 of 597

V 10.6 9/14/2023

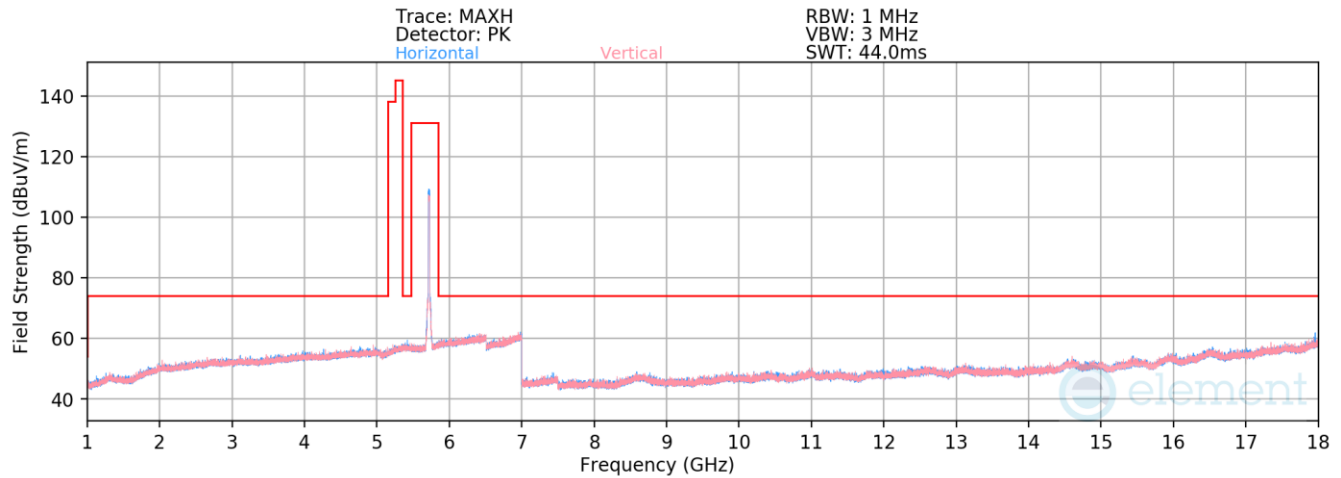

Plot 7-975. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11ax(SU) – Ch. 144)


Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5720MHz
Channel: 144

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11440.00	Average	H	-	-	-80.44	12.05	38.61	53.98	-15.37
*	11440.00	Peak	H	-	-	-70.38	12.05	48.67	73.98	-25.31
	17160.00	Peak	H	-	-	-72.03	20.91	55.88	68.20	-12.32

Table 7-314. Radiated Measurements Antenna 1b

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 336 of 597

V 10.6 9/14/2023

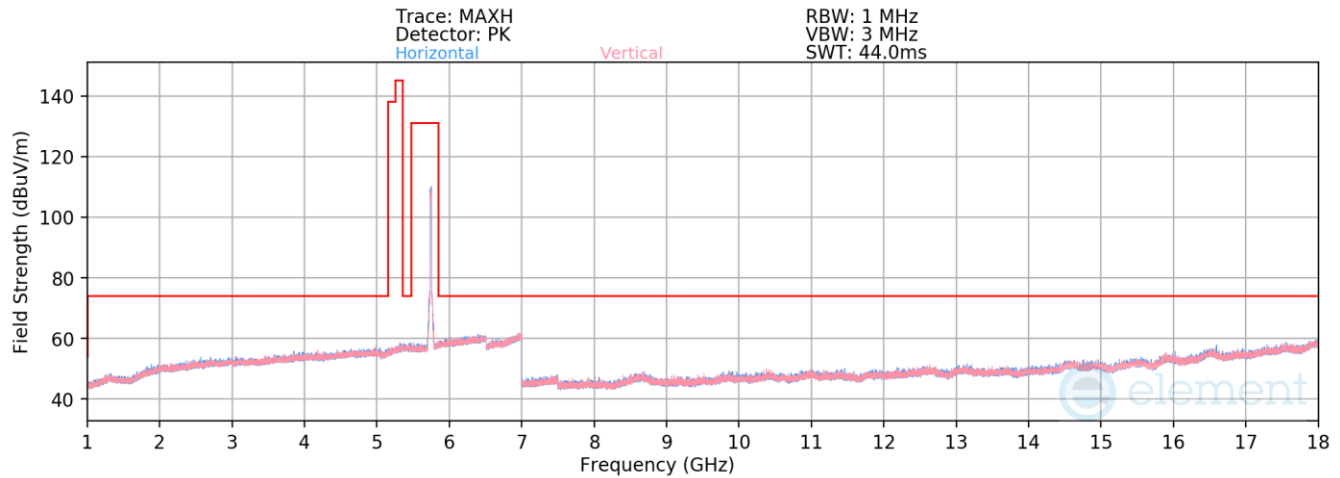

Plot 7-976. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11ax(SU) – Ch. 149)


Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11490.00	Average	H	-	-	-81.40	11.97	37.57	53.98	-16.41
*	11490.00	Peak	H	-	-	-70.26	11.97	48.71	73.98	-25.27
	17235.00	Peak	H	-	-	-71.32	20.94	56.62	68.20	-11.58

Table 7-315. Radiated Measurements Antenna 1b

FCC ID: BCGA2903 IC: 579C-A2903			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device		Page 337 of 597

V 10.6 9/14/2023

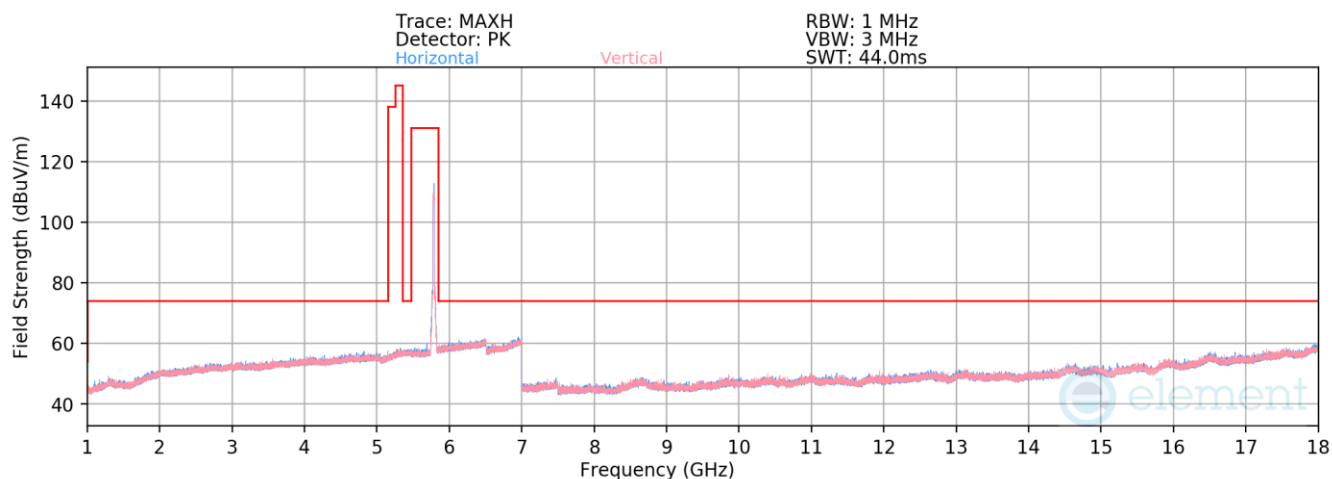

Plot 7-977. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11ax(SU) – Ch. 157)

Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5785MHz
Channel: 157


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11570.00	Average	H	-	-	-80.79	12.07	38.28	53.98	-15.70
*	11570.00	Peak	H	-	-	-70.54	12.07	48.53	73.98	-25.45
	17355.00	Peak	H	-	-	-71.18	21.01	56.83	68.20	-11.37

Table 7-316. Radiated Measurements Antenna 1b

FCC ID: BCGA2903 IC: 579C-A2903	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 338 of 597

V 10.6 9/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

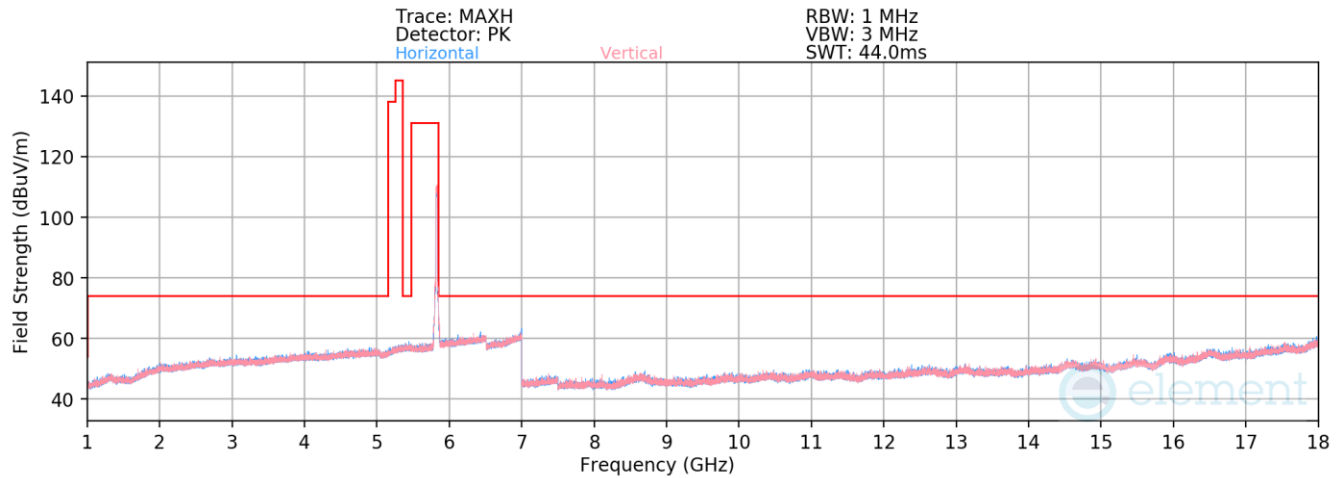

Plot 7-978. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11ax(SU) – Ch. 165)

Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11650.00	Average	H	-	-	-81.56	11.97	37.41	53.98	-16.57
*	11650.00	Peak	H	-	-	-70.38	11.97	48.59	73.98	-25.39
	17475.00	Peak	H	-	-	-71.22	21.83	57.61	68.20	-10.59


Table 7-317. Radiated Measurements Antenna 1b

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 339 of 597

V 10.6 9/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.6.4 CDD/SDM Primary Radiated Spurious Emission

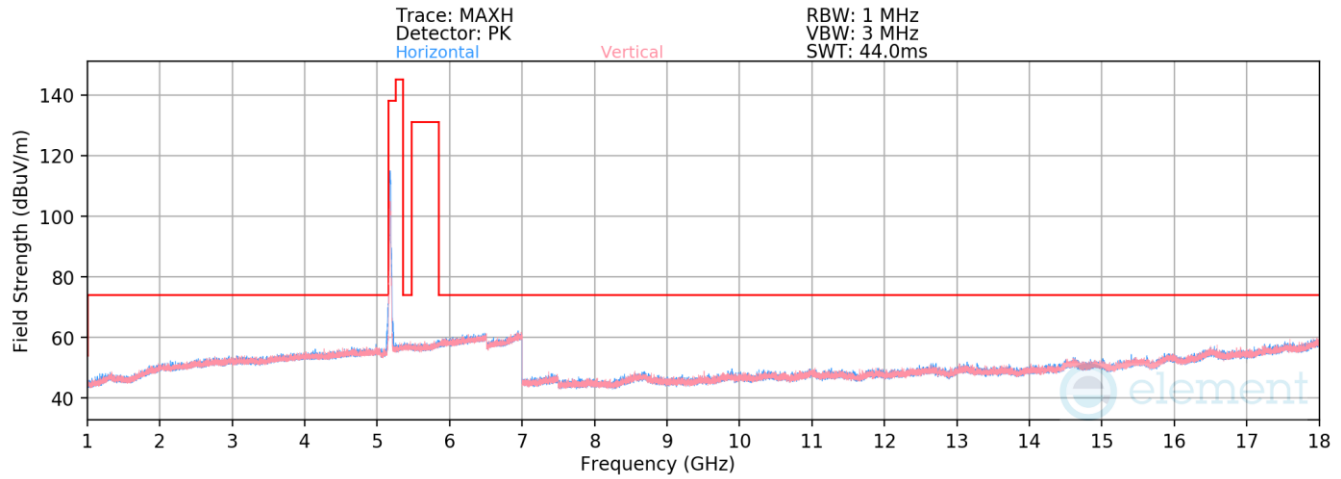

Plot 7-979. Radiated Spurious Emissions above 1GHz CDD/SDM Primary (802.11n – Ch. 36)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5180MHz
Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10360.00	Peak	H	-	-	-69.53	11.14	48.61	68.20	-19.59
* 15540.00	Average	H	-	-	-81.86	17.36	42.50	53.98	-11.48
* 15540.00	Peak	H	-	-	-69.80	17.36	54.56	73.98	-19.42


Table 7-318. Radiated Measurements SDM Primary

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 340 of 597

V 10.6 9/14/2023

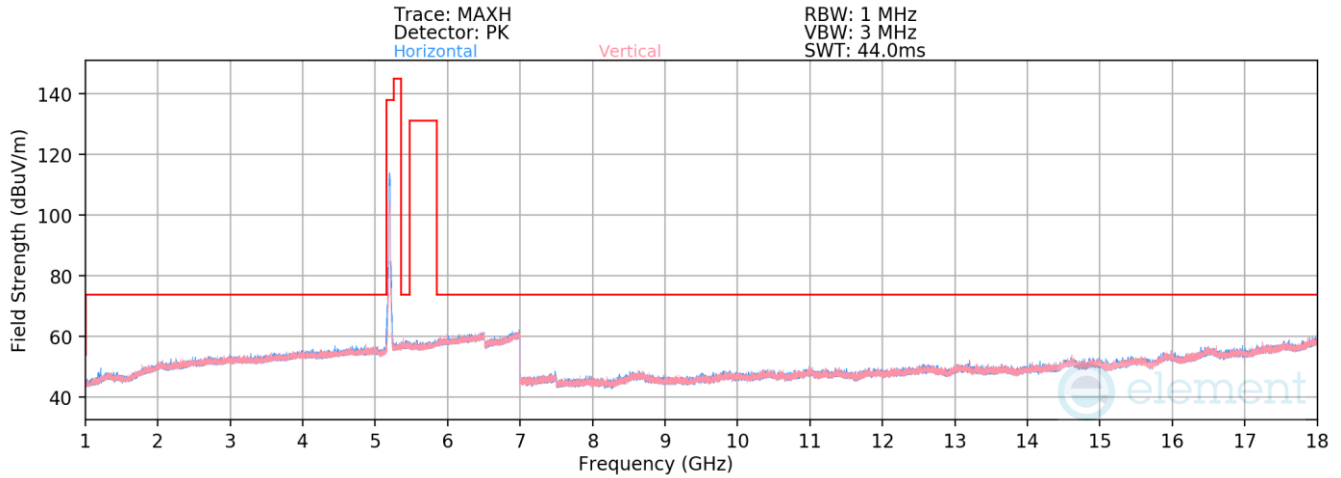

Plot 7-980. Radiated Spurious Emissions above 1GHz CDD/SDM Primary (802.11n – Ch. 40)

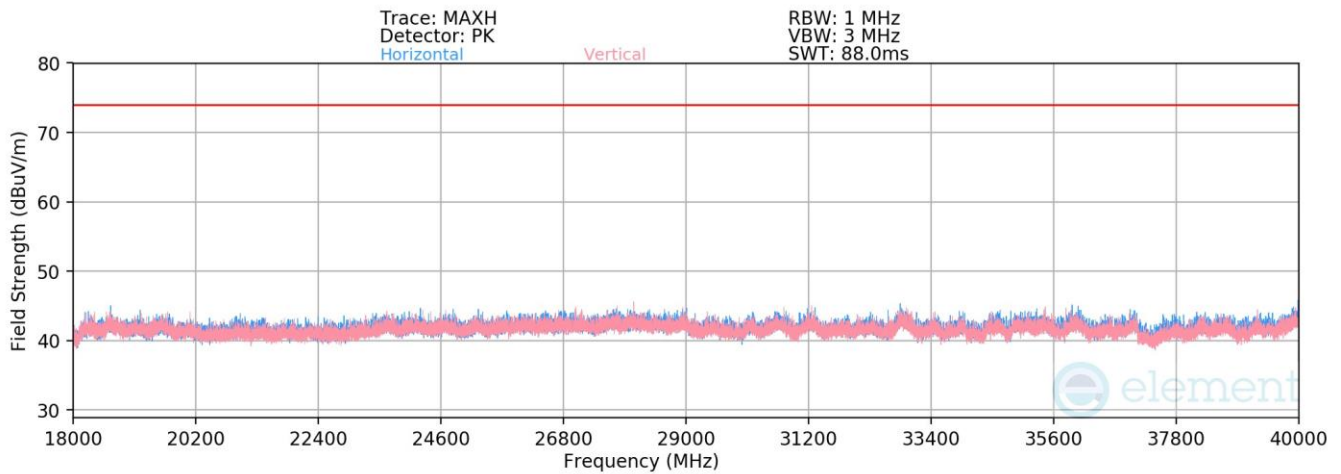

Plot 7-981. Radiated Spurious Emissions 18GHz – 40GHz CDD/SDM Primary (802.11n – Ch. 40)

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 341 of 597

V 10.6 9/14/2023

Mode: 802.11n
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	Peak	H	-	-	-69.70	11.20	48.50	68.20	-19.70
* 15600.00	Average	H	-	-	-81.45	17.11	42.66	53.98	-11.32
* 15600.00	Peak	H	-	-	-71.14	17.11	52.97	73.98	-21.01

Table 7-319. Radiated Measurements SDM Primary

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 342 of 597

V 10.6 9/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

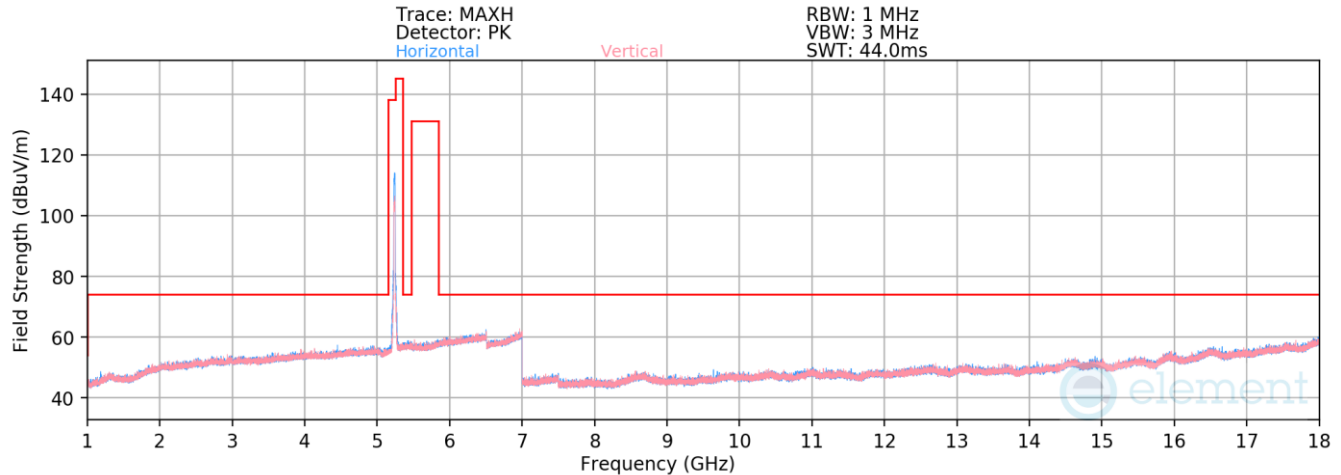

Plot 7-982. Radiated Spurious Emissions above 1GHz CDD/SDM Primary (802.11n – Ch. 48)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	H	-	-	-69.63	11.30	48.67	68.20	-19.53
* 15720.00	Average	H	-	-	-81.78	16.73	41.95	53.98	-12.03
* 15720.00	Peak	H	-	-	-71.57	16.73	52.16	73.98	-21.82

Table 7-320. Radiated Measurements SDM Primary

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 343 of 597

V 10.6 9/14/2023

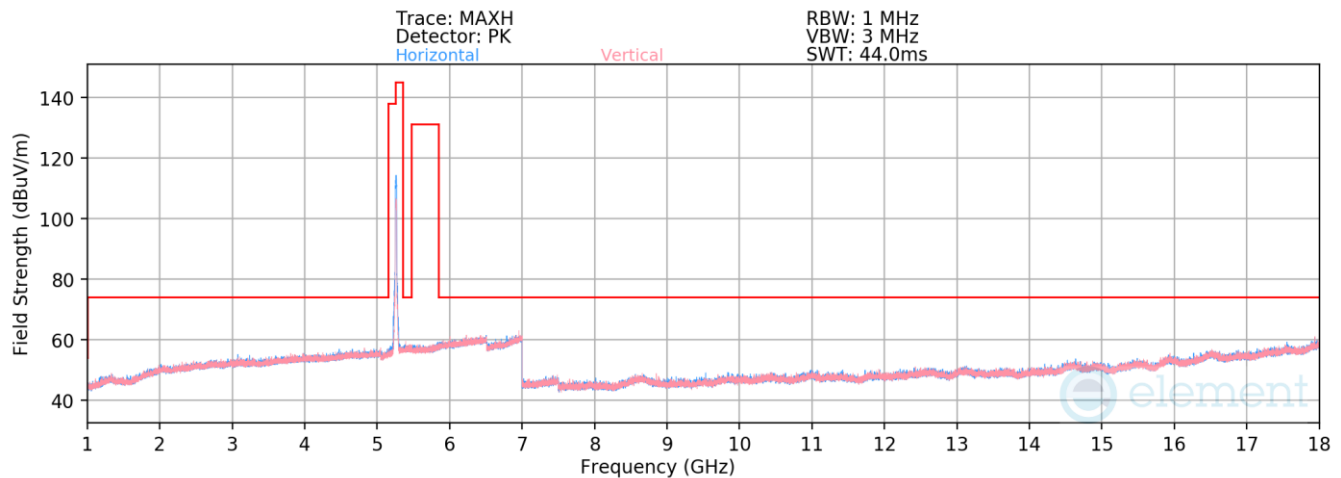

Plot 7-983. Radiated Spurious Emissions above 1GHz CDD/SDM Primary (802.11n – Ch. 52)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5260MHz
Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10520.00	Peak	H	-	-	-69.88	11.15	48.27	68.20	-19.93
* 15780.00	Average	H	-	-	-80.36	17.32	43.96	69.20	-25.24
* 15780.00	Peak	H	-	-	-70.30	17.32	54.02	70.20	-16.18


Table 7-321. Radiated Measurements SDM Primary

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 344 of 597

V 10.6 9/14/2023

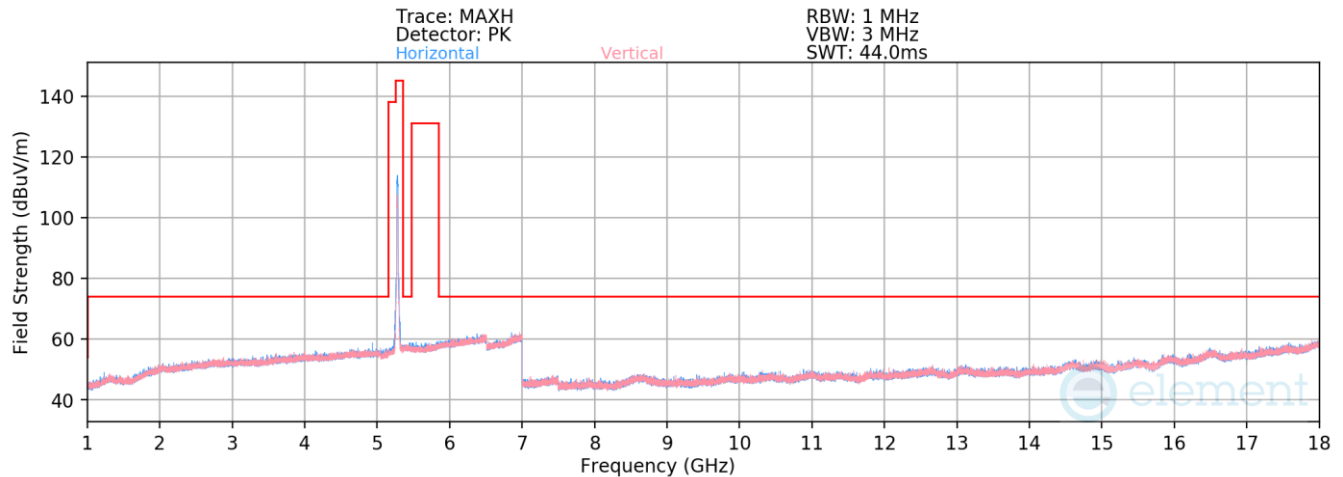

Plot 7-984. Radiated Spurious Emissions above 1GHz CDD/SDM Primary (802.11n – Ch. 56)

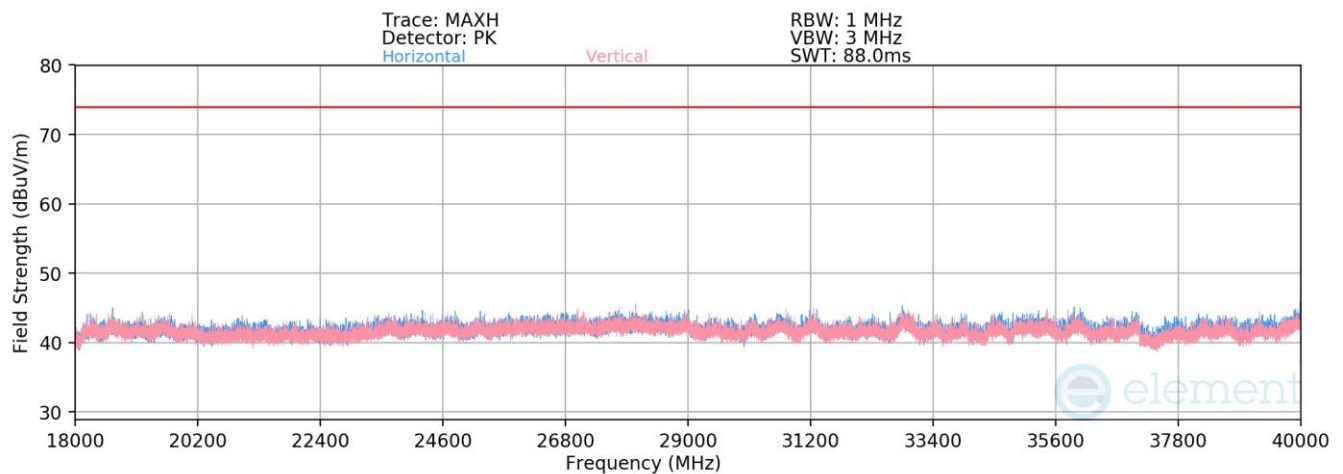

Plot 7-985. Radiated Spurious Emissions 18GHz – 40GHz CDD/SDM Primary (802.11n – Ch. 56)

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 345 of 597

V 10.6 9/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode: 802.11n
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	H	-	-	-69.35	11.01	48.66	68.20	-19.54
* 15840.00	Average	H	-	-	-80.92	17.73	43.81	69.20	-25.39
* 15840.00	Peak	H	-	-	-70.07	17.73	54.66	70.20	-15.54

Table 7-322. Radiated Measurements SDM Primary

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 346 of 597

V 10.6 9/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

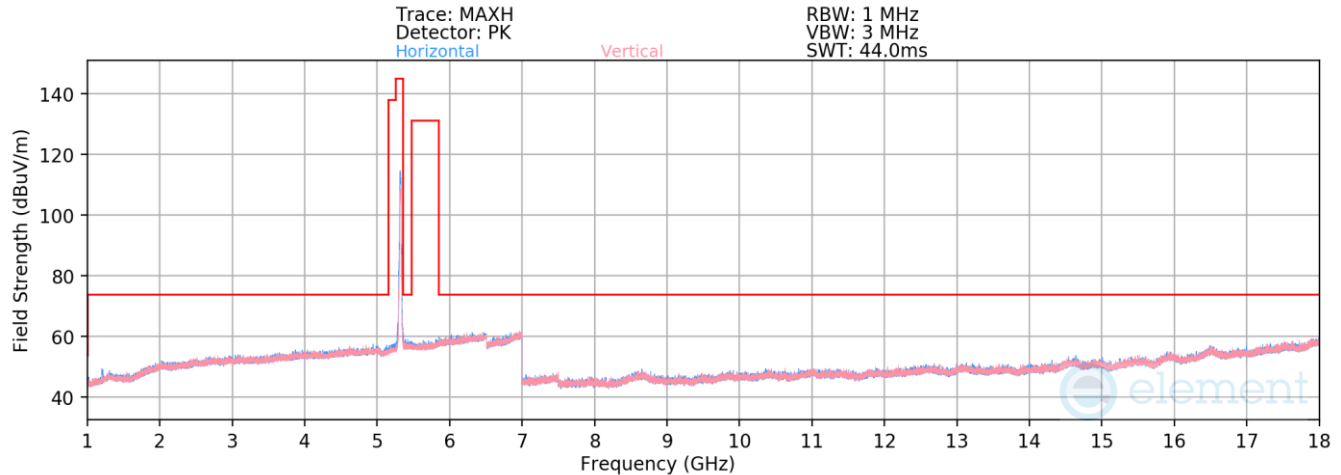

Plot 7-986. Radiated Spurious Emissions above 1GHz CDD/SDM Primary (802.11n – Ch. 64)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5320MHz
Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	H	-	-	-79.49	10.87	38.38	68.20	-29.82
* 10640.00	Peak	H	-	-	-69.44	10.87	48.43	69.20	-20.77
* 15960.00	Average	H	-	-	-81.47	17.92	43.45	70.20	-26.75
* 15960.00	Peak	H	-	-	-70.21	17.92	54.71	71.20	-16.49

Table 7-323. Radiated Measurements SDM Primary

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 347 of 597

V 10.6 9/14/2023

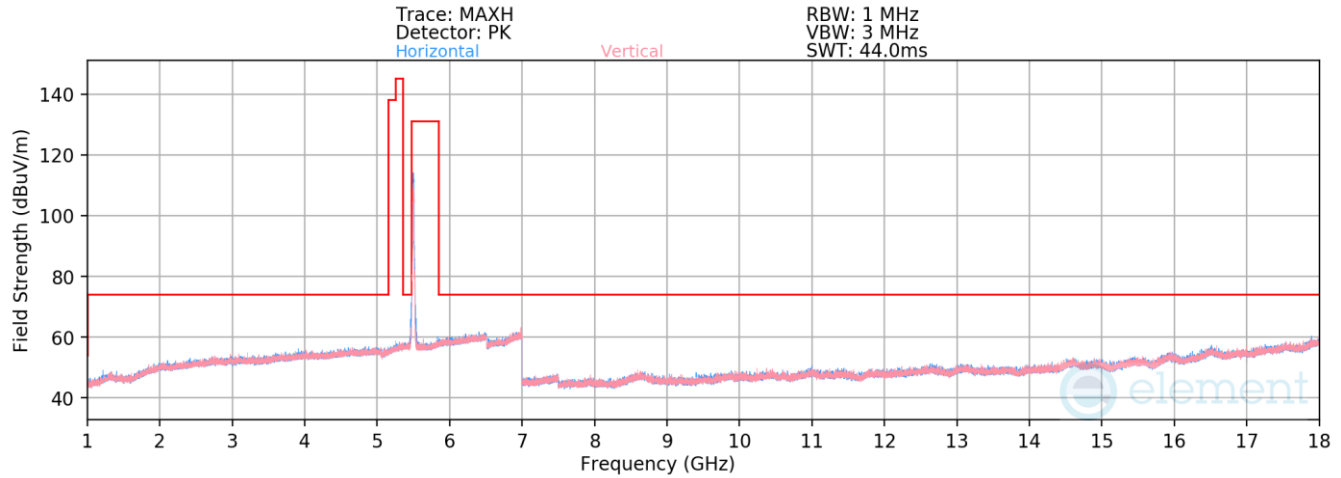

Plot 7-987. Radiated Spurious Emissions above 1GHz CDD/SDM Primary (802.11n – Ch. 100)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	H	-	-	-80.61	12.10	38.49	68.20	-29.71
* 11000.00	Peak	H	-	-	-69.78	12.10	49.32	69.20	-19.88
16500.00	Peak	H	-	-	-70.57	19.60	56.03	70.20	-14.17

Table 7-324. Radiated Measurements SDM Primary

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-24.BCG	Test Dates: 11/28/2023 - 01/15/2024	EUT Type: Tablet Device	Page 348 of 597

V 10.6 9/14/2023