


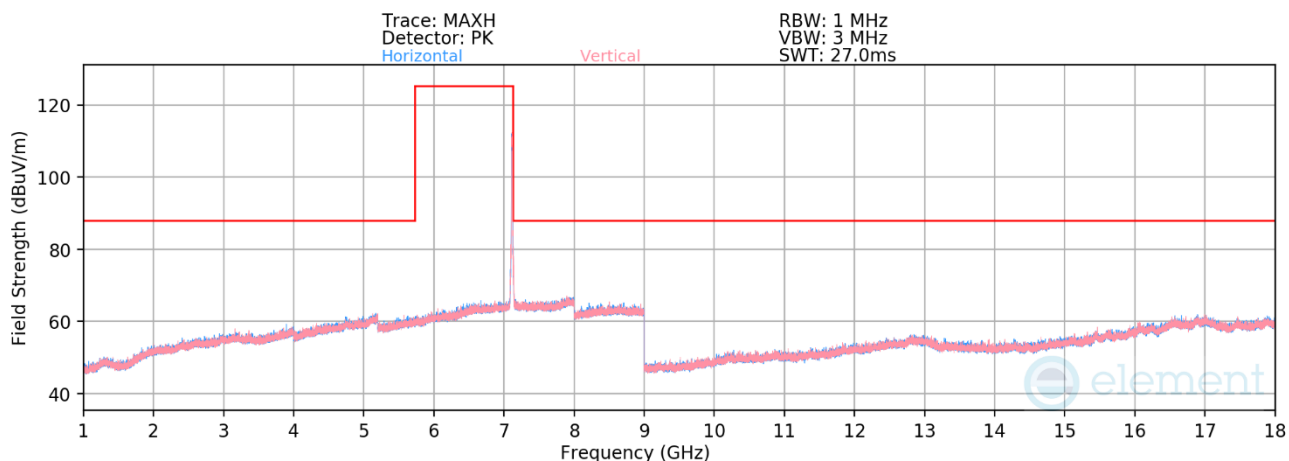

Plot 7-543. Radiated Spurious Emissions 1-18GHz SDM Diversity (802.11be – Ch. 233)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 7115MHz
Channel: 233

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
14230.00	Average	V	-	-	-86.17	22.86	43.69	68.23	-24.54
14230.00	Peak	V	-	-	-75.33	22.86	54.53	88.23	-33.70


Table 7-105. Radiated Spurious Emission Measurements SDM Diversity

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 193 of 239

V 11.0 5/2025


7.7.3 Antenna WF5B Radiated Band Edge Measurements (20MHz BW)

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	5955MHz
Channel	1

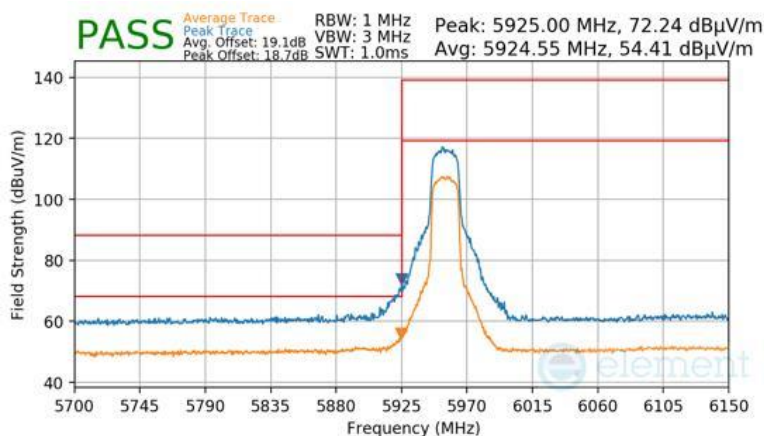

Plot 7-544 Antenna WF5B Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	7095MHz
Channel	229

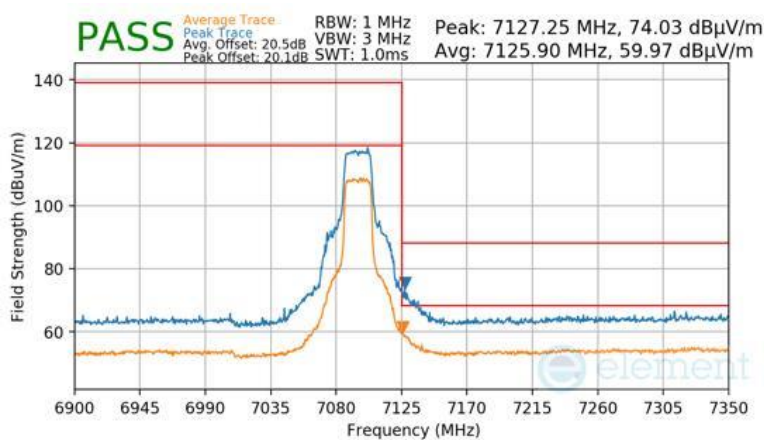


Plot 7-545 Antenna WF5B Radiated Upper Band Edge (Peak & Average – UNII Band 8)


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 194 of 239

V 11.0 5/2025

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	7115MHz
Channel	233

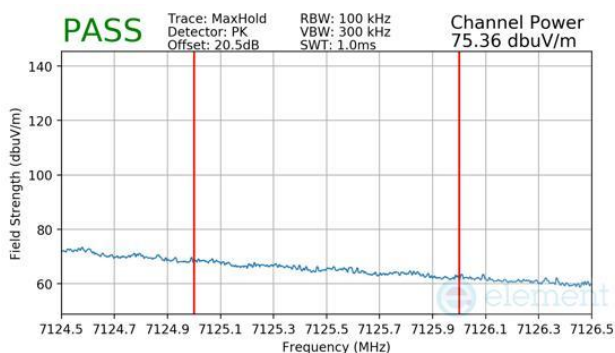

Plot 7-546 Antenna WF5B Radiated Upper Band Edge (Peak – UNII Band 8)

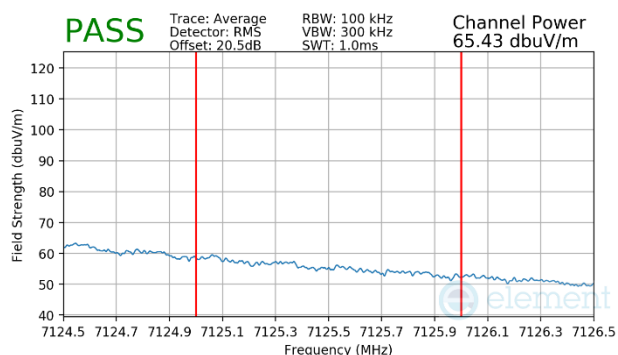


Plot 7-547 Antenna WF5B Radiated Upper Band Edge (Average – UNII Band 8)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 195 of 239

V 11.0 5/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5955MHz
Channel	1

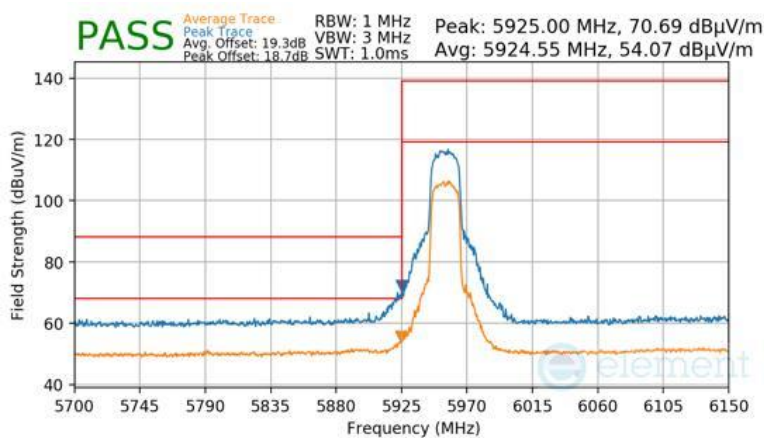

Plot 7-548 Antenna WF5B Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7095MHz
Channel	229

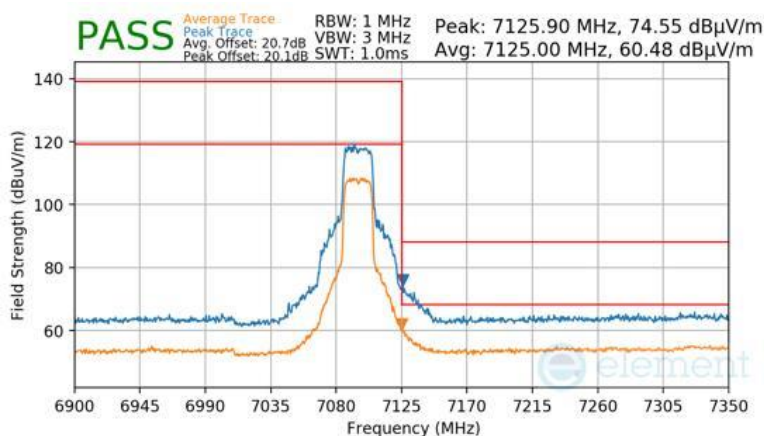


Plot 7-549 Antenna WF5B Radiated Upper Band Edge (Peak & Average – UNII Band 8)


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 196 of 239

V 11.0 5/2025

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7115MHz
Channel	233

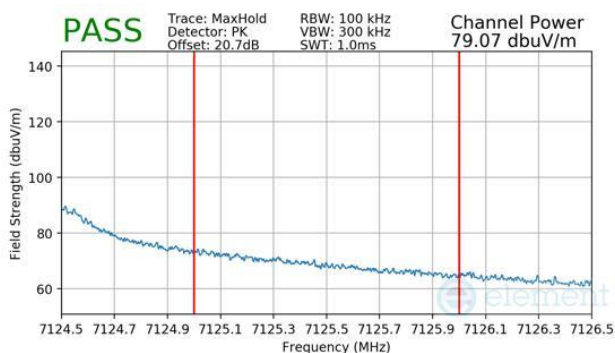

Plot 7-550 Antenna WF5B Radiated Upper Band Edge (Peak – UNII Band 8)

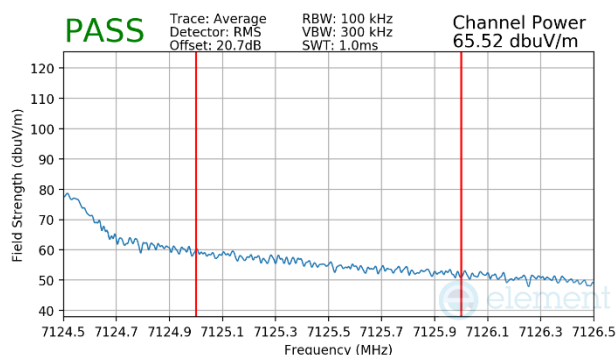


Plot 7-551 Antenna WF5B Radiated Upper Band Edge (Average – UNII Band 8)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 197 of 239

V 11.0 5/2025


7.7.4 Antenna WF5B Radiated Band Edge Measurements (40MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5965MHz
Channel	3

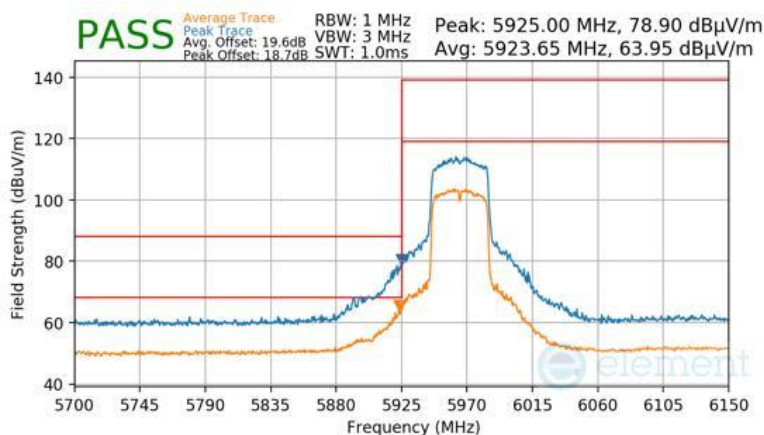

Plot 7-552 Antenna WF5B Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7085MHz
Channel	227

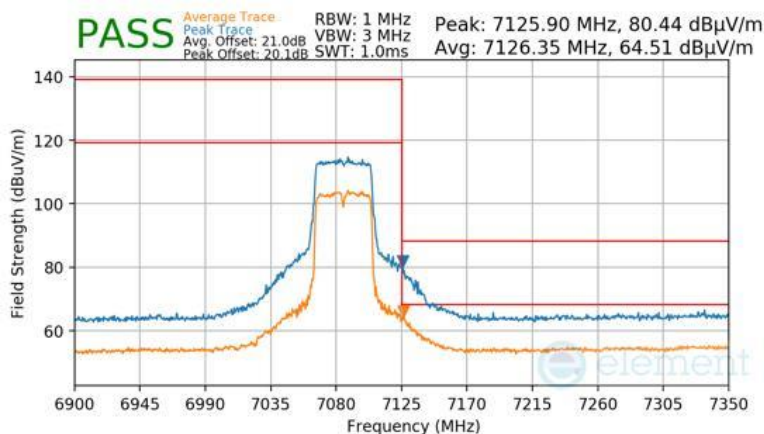


Plot 7-553 Antenna WF5B Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 198 of 239

V 11.0 5/2025


7.7.5 Antenna WF5B Radiated Band Edge Measurements (80MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5985MHz
Channel	7

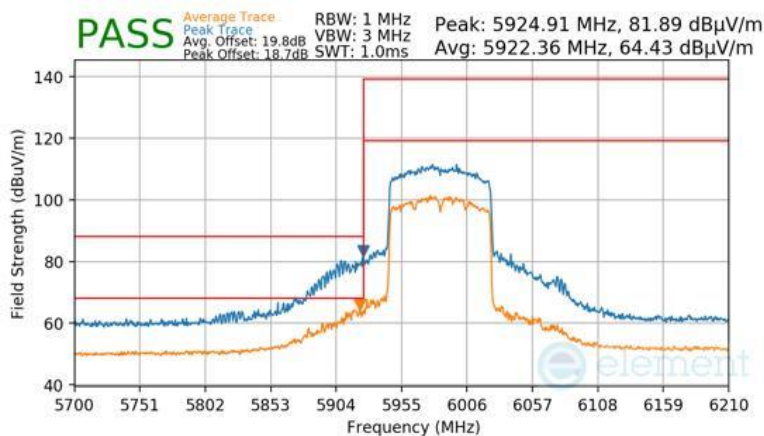

Plot 7-554 Antenna WF5B Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7025MHz
Channel	215

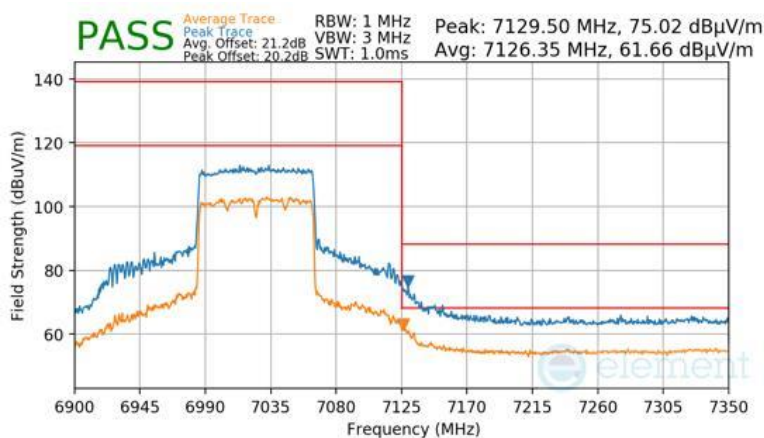


Plot 7-555 Antenna WF5B Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 199 of 239

V 11.0 5/2025


7.7.6 Antenna WF5B Radiated Band Edge Measurements (160MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6025MHz
Channel	15

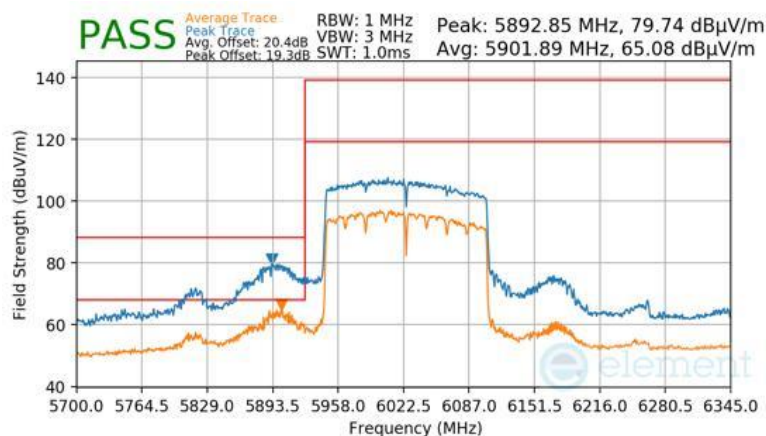

Plot 7-556 Antenna WF5B Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6985MHz
Channel	207

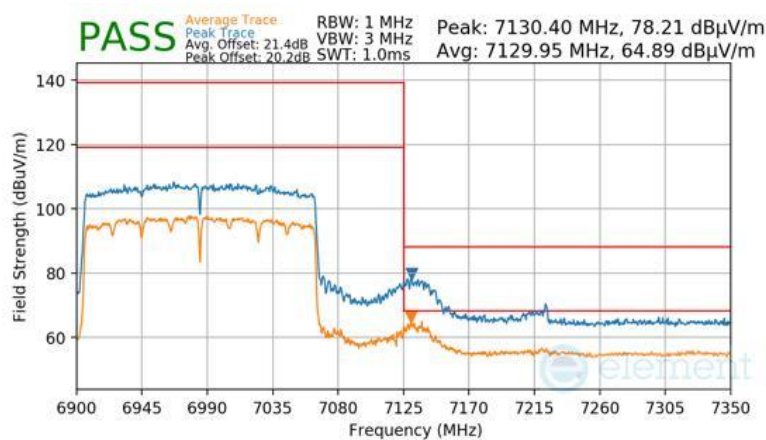


Plot 7-557 Antenna WF5B Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 200 of 239

V 11.0 5/2025


7.7.7 Antenna WF8 Radiated Band Edge Measurements (20MHz BW)

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	5955MHz
Channel	1

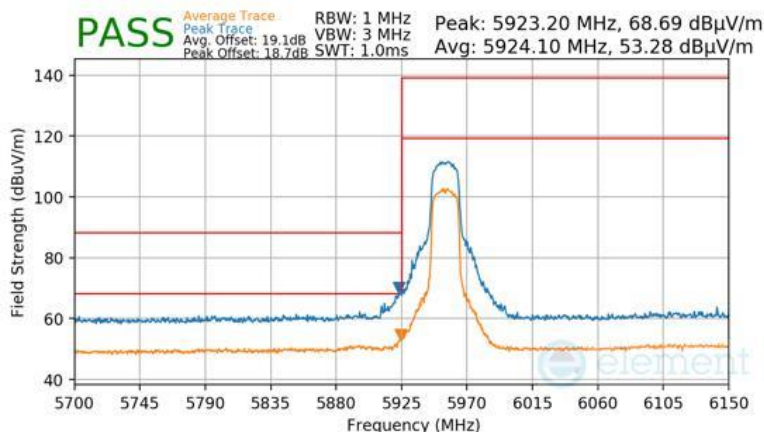

Plot 7-558 Antenna WF8 Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	7095MHz
Channel	229

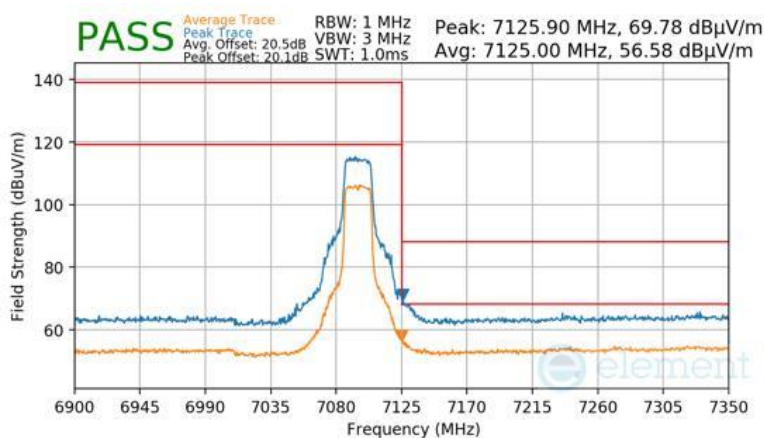


Plot 7-559 Antenna WF8 Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 201 of 239

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	7115MHz
Channel	233

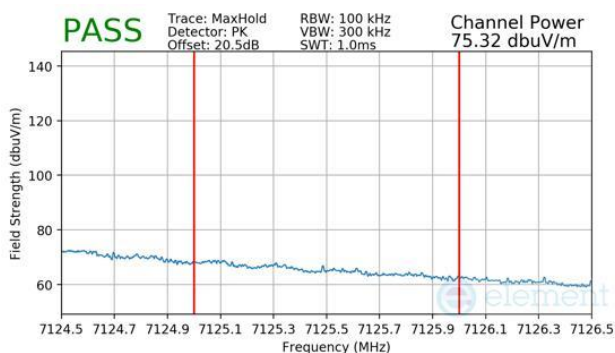

Plot 7-560 Antenna WF8 Radiated Upper Band Edge (Peak – UNII Band 8)

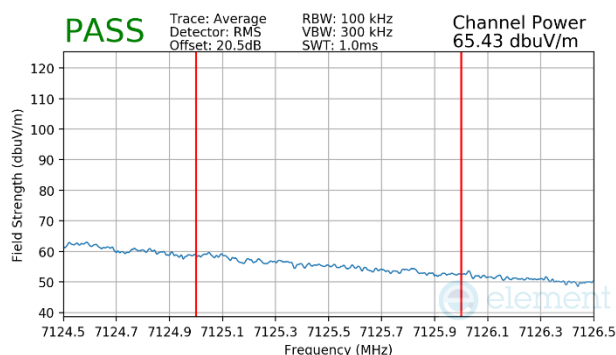


Plot 7-561 Antenna WF8 Radiated Upper Band Edge (Average – UNII Band 8)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 202 of 239


V 11.0 5/2025

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5955MHz
Channel	1

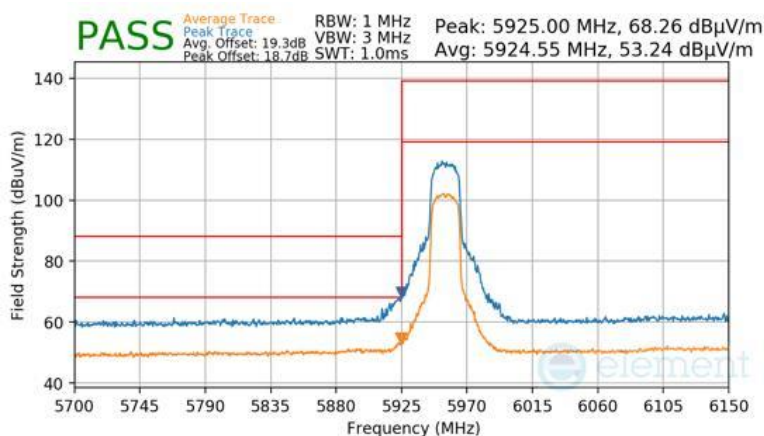

Plot 7-562 Antenna WF8 Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7095MHz
Channel	229

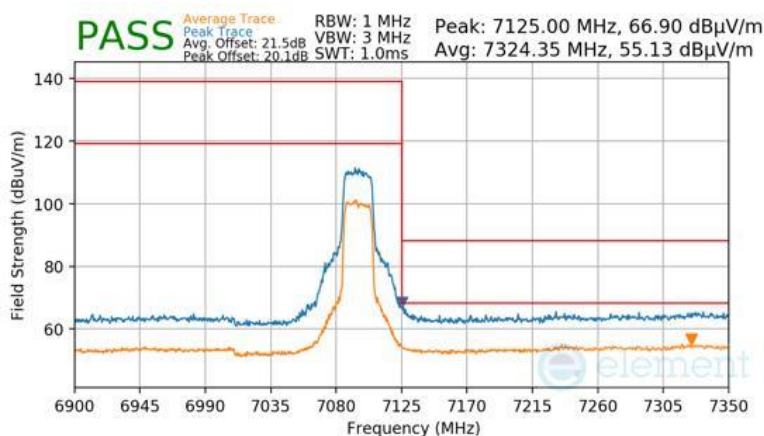


Plot 7-563 Antenna WF8 Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 203 of 239

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7115MHz
Channel	233

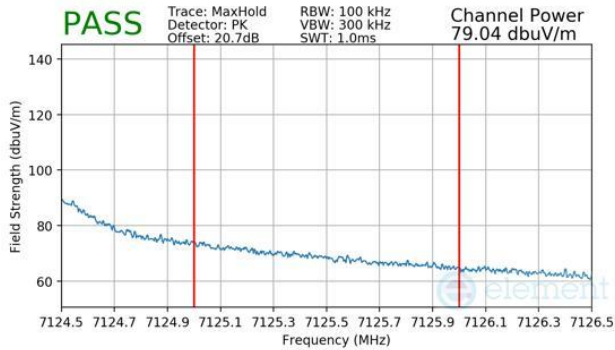

Plot 7-564 Antenna WF8 Radiated Upper Band Edge (Peak – UNII Band 8)

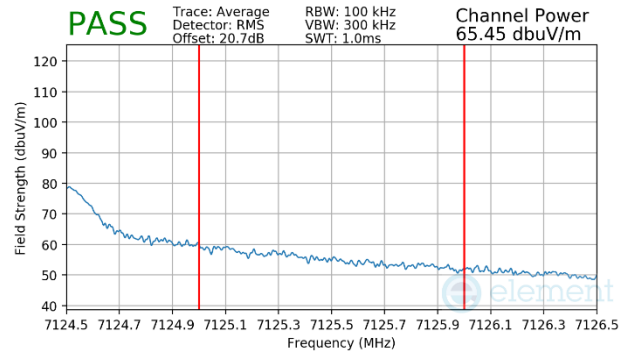

Plot 7-565 Antenna WF8 Radiated Upper Band Edge (Average – UNII Band 8)


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 204 of 239

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


7.7.8 Antenna WF8 Radiated Band Edge Measurements (40MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5965MHz
Channel	3

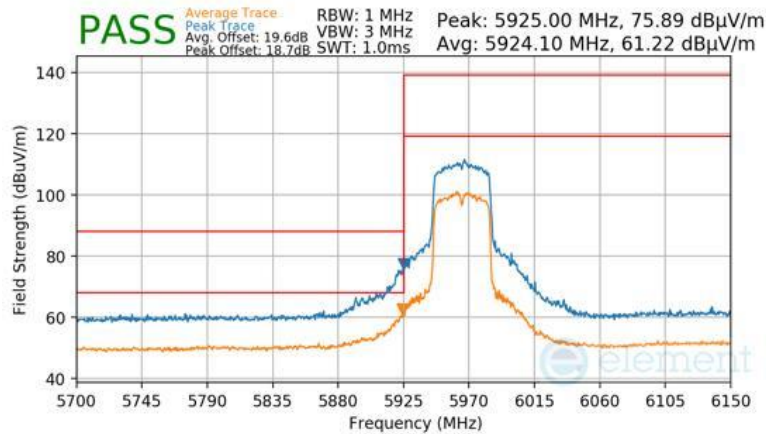

Plot 7-566 Antenna WF8 Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7085MHz
Channel	227

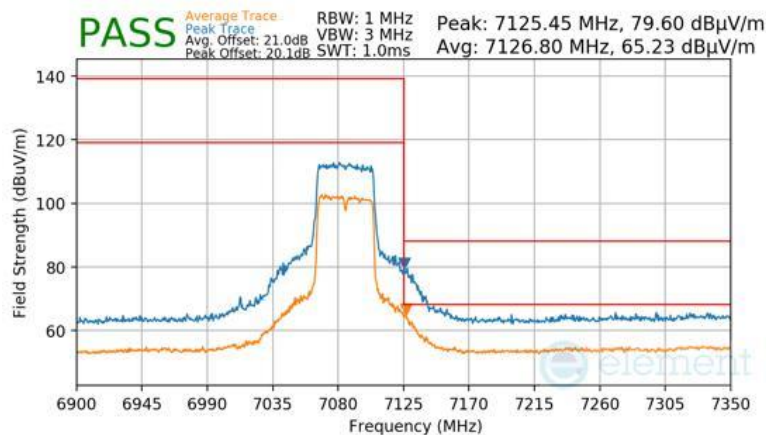


Plot 7-567 Antenna WF8 Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 205 of 239

V 11.0 5/2025


7.7.9 Antenna WF8 Radiated Band Edge Measurements (80MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5985MHz
Channel	7

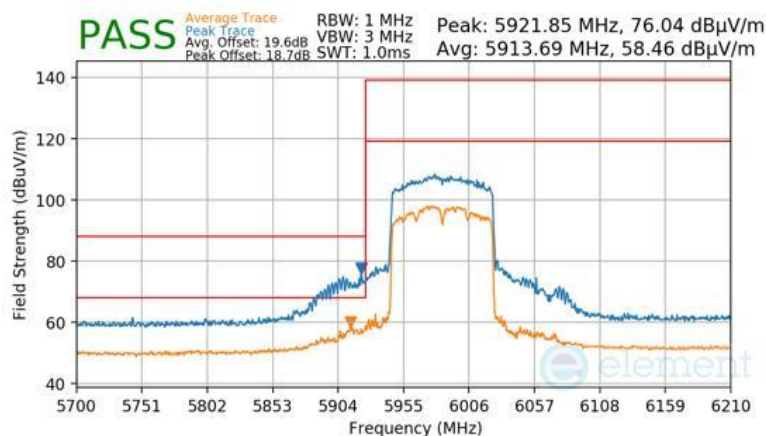

Plot 7-568 Antenna WF8 Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7025MHz
Channel	215

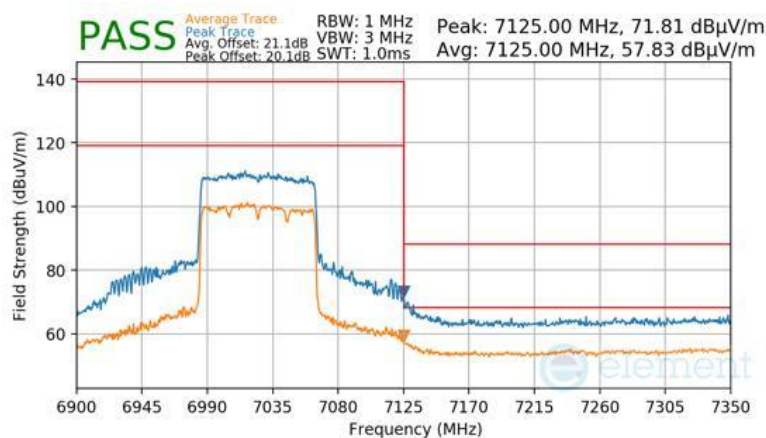


Plot 7-569 Antenna WF8 Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 206 of 239

V 11.0 5/2025


7.7.10 Antenna WF8 Radiated Band Edge Measurements (160MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6025MHz
Channel	15

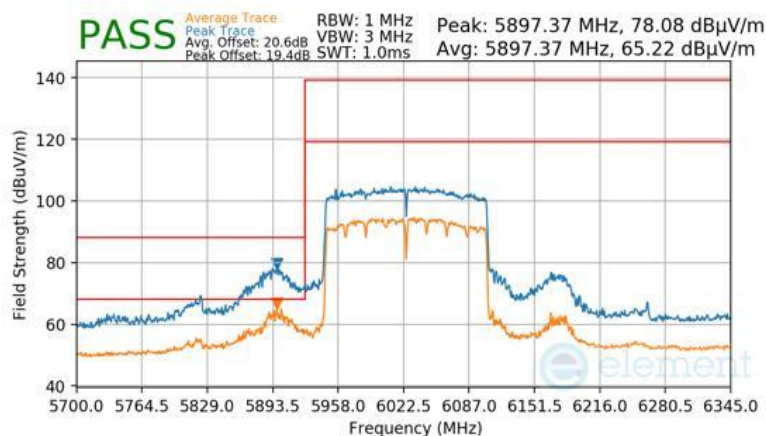

Plot 7-570 Antenna WF8 Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6985MHz
Channel	207

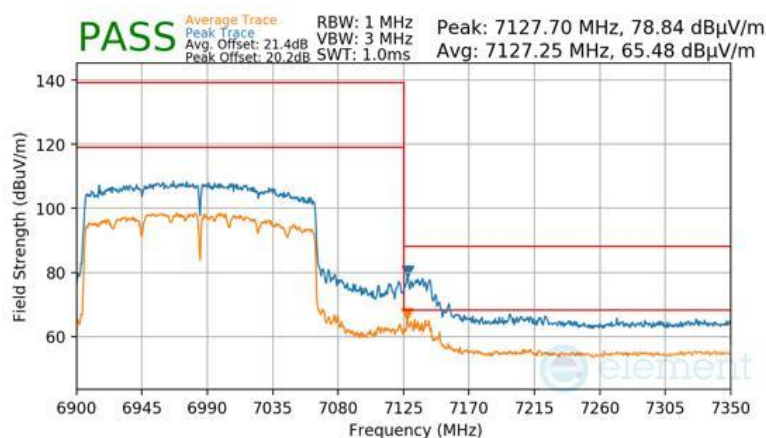


Plot 7-571 Antenna WF8 Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 207 of 239

V 11.0 5/2025


7.7.11 Antenna WF7 Radiated Band Edge Measurements (20MHz BW)

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	5955MHz
Channel	1

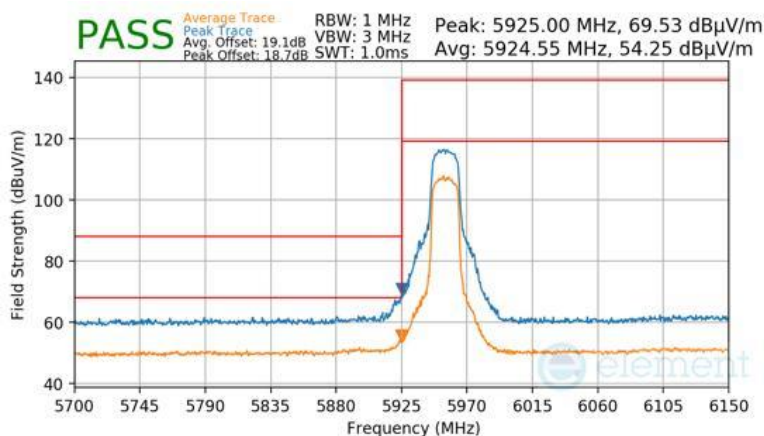


Plot 7-572 Antenna WF7 Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	7115MHz
Channel	233

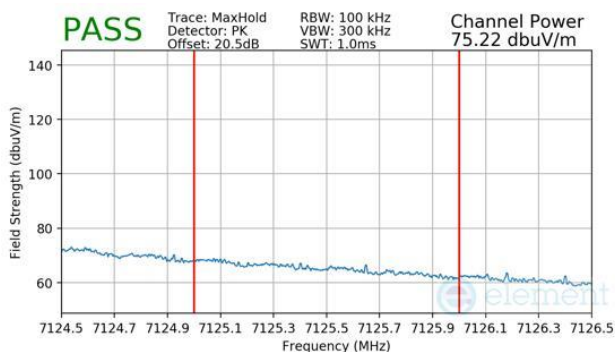

Plot 7-573 Antenna WF7 Radiated Upper Band Edge (Peak – UNII Band 8)

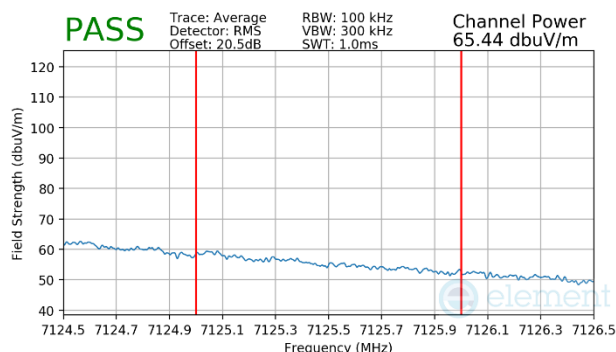


Plot 7-574 Antenna WF7 Radiated Upper Band Edge (Average – UNII Band 8)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 208 of 239


V 11.0 5/2025

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5955MHz
Channel	1

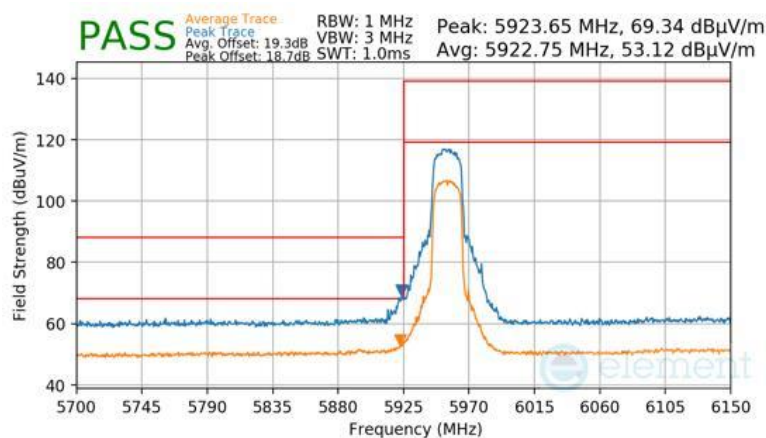

Plot 7-575 Antenna WF7 Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7095MHz
Channel	229

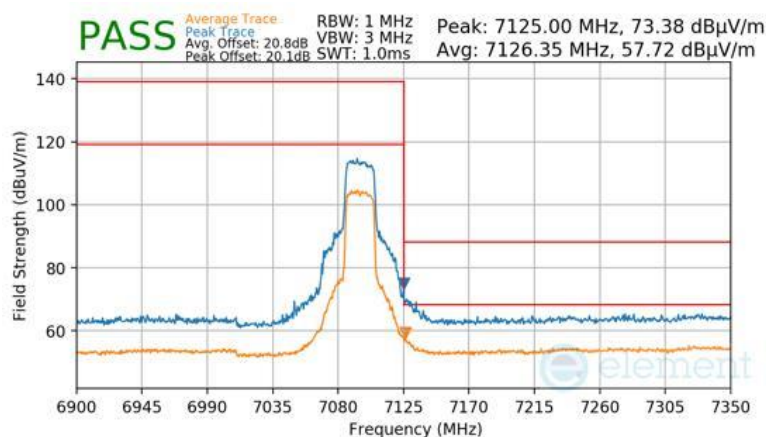


Plot 7-576 Antenna WF7 Radiated Upper Band Edge (Peak & Average – UNII Band 8)


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 209 of 239

V 11.0 5/2025

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7115MHz
Channel	233

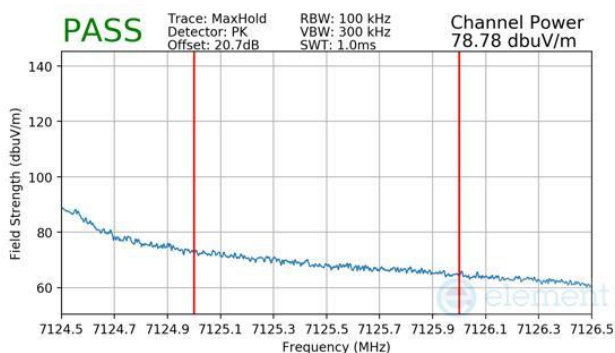

Plot 7-577 Antenna WF7 Radiated Upper Band Edge (Peak – UNII Band 8)

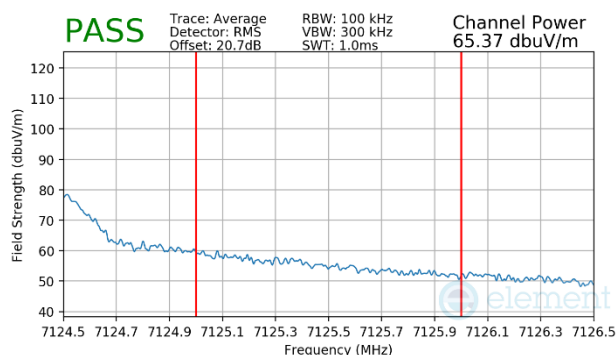


Plot 7-578 Antenna WF7 Radiated Upper Band Edge (Average – UNII Band 8)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 210 of 239

V 11.0 5/2025


7.7.12 Antenna WF7 Radiated Band Edge Measurements (40MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5965MHz
Channel	3

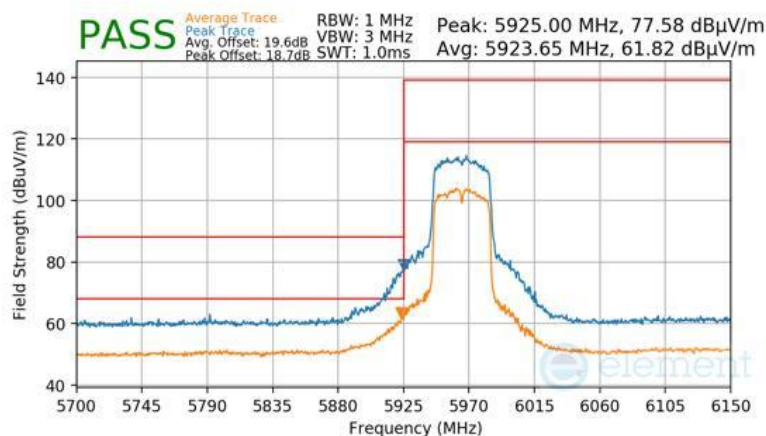

Plot 7-579 Antenna WF7 Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7085MHz
Channel	227

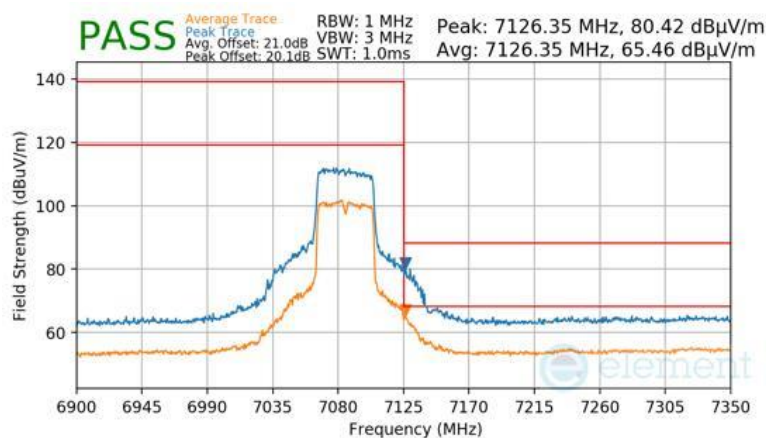


Plot 7-580 Antenna WF7 Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 211 of 239

V 11.0 5/2025


7.7.13 Antenna WF7 Radiated Band Edge Measurements (80MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5985MHz
Channel	7

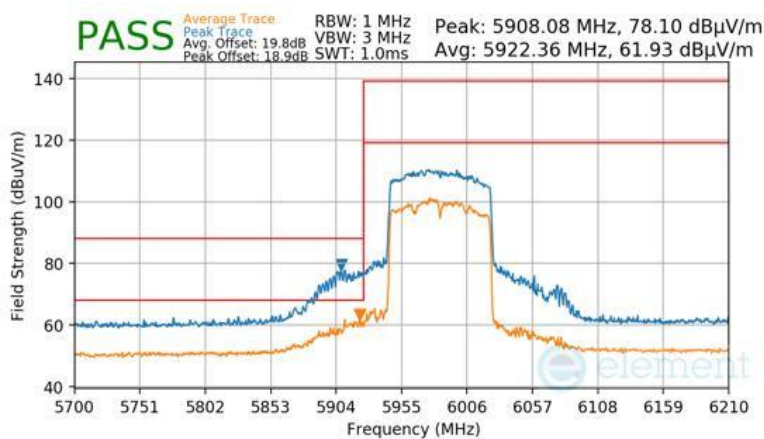

Plot 7-581 Antenna WF7 Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7025MHz
Channel	215

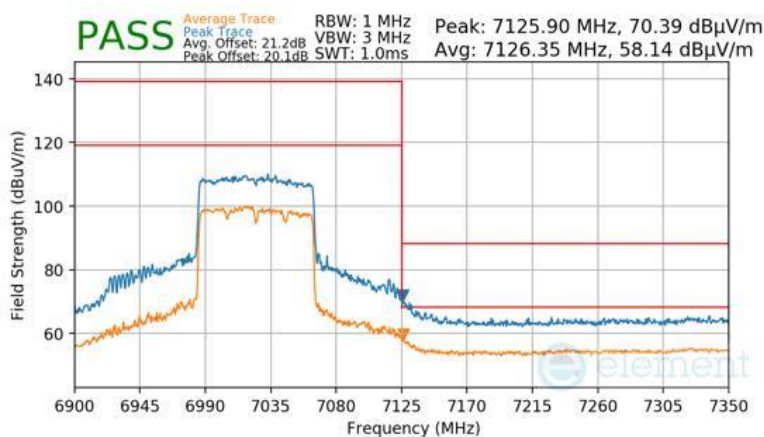


Plot 7-582 Antenna WF7 Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 212 of 239

V 11.0 5/2025


7.7.14 Antenna WF7 Radiated Band Edge Measurements (160MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6025MHz
Channel	15

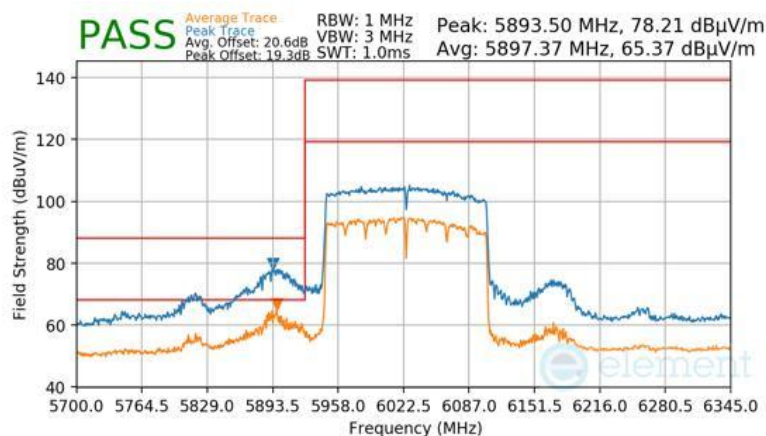

Plot 7-583 Antenna WF7 Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6985MHz
Channel	207

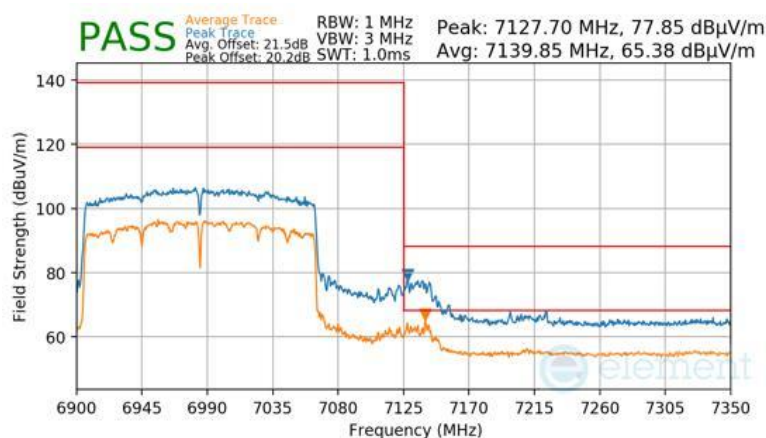


Plot 7-584 Antenna WF7 Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 213 of 239

V 11.0 5/2025


7.7.15 CDD/SDM Primary Radiated Band Edge Measurements (20MHz BW)

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	5955MHz
Channel	1

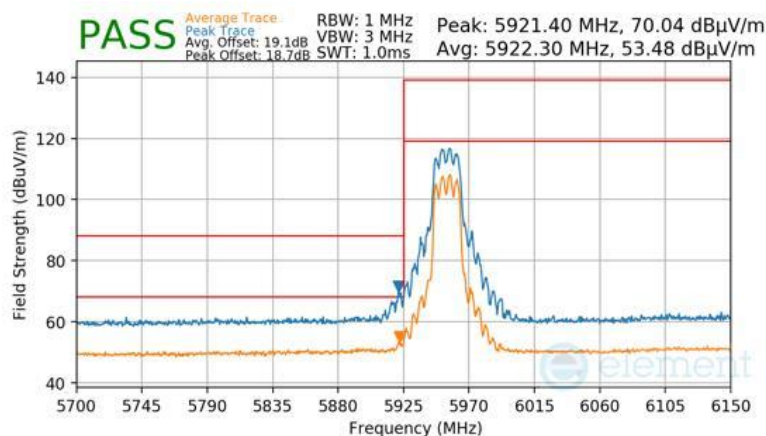

Plot 7-585 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	7095MHz
Channel	229

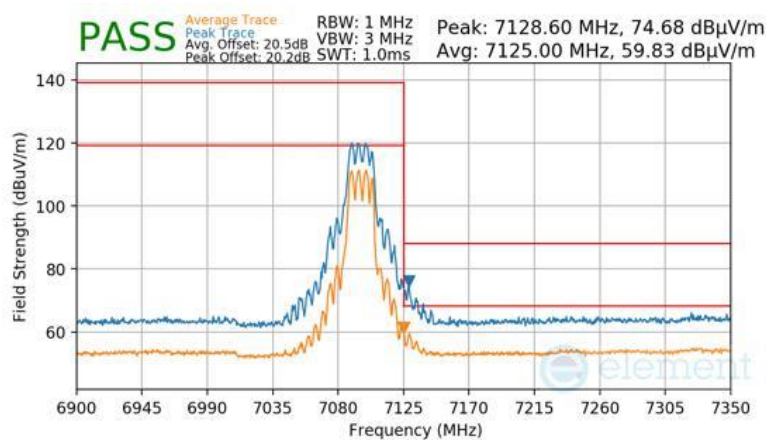


Plot 7-586 SDM Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8)


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 214 of 239

V 11.0 5/2025

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	7115MHz
Channel	233

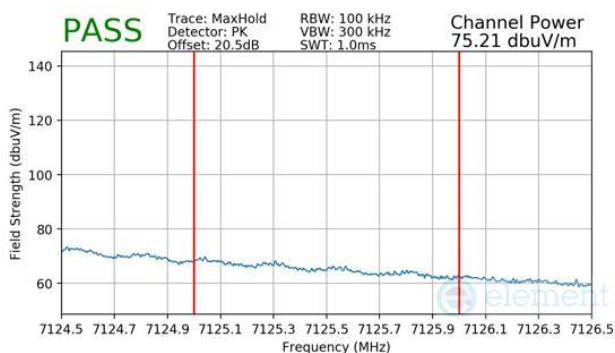

Plot 7-587 SDM Primary Radiated Upper Band Edge (Peak – UNII Band 8)

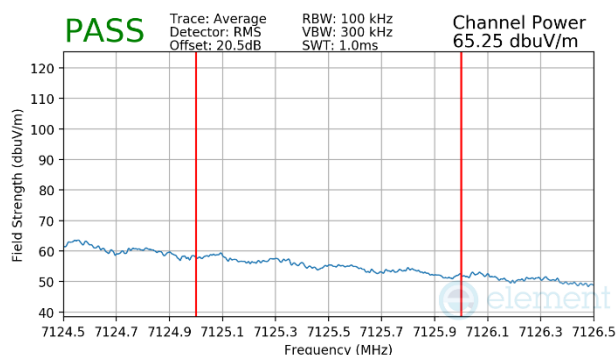


Plot 7-588 SDM Primary Radiated Upper Band Edge (Average – UNII Band 8)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 215 of 239


V 11.0 5/2025

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5955MHz
Channel	1

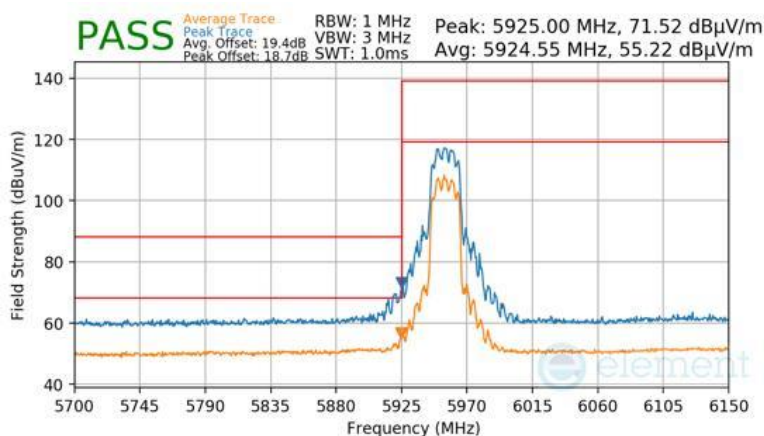

Plot 7-589 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7095MHz
Channel	229

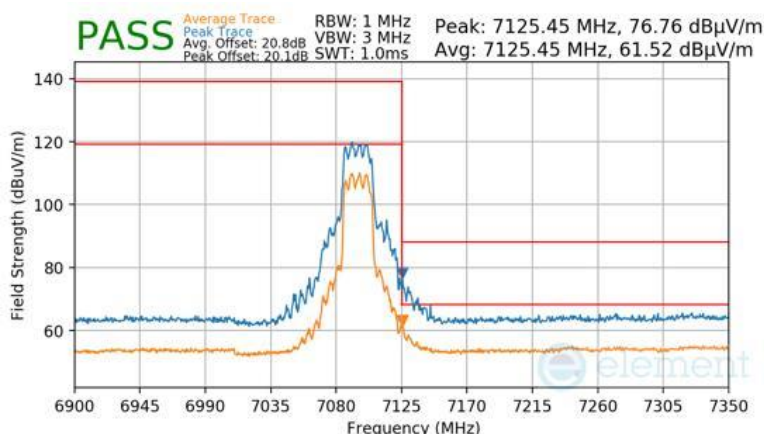


Plot 7-590 SDM Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8)


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 216 of 239

V 11.0 5/2025

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7115MHz
Channel	233

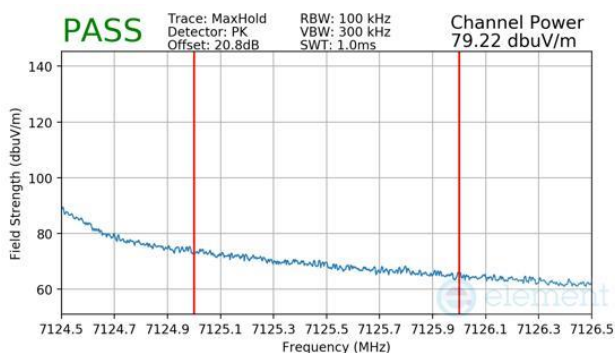

Plot 7-591 SDM Primary Radiated Upper Band Edge (Peak – UNII Band 8)

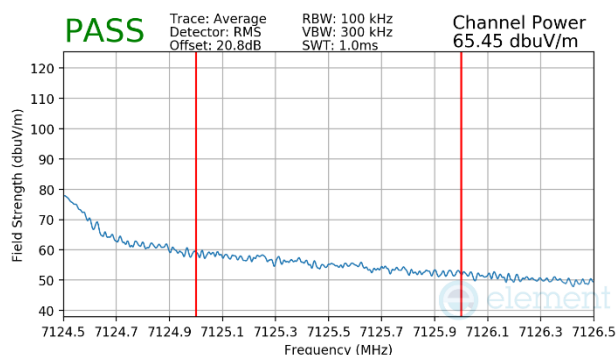


Plot 7-592 SDM Primary Radiated Upper Band Edge (Average – UNII Band 8)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 217 of 239

V 11.0 5/2025


7.7.16 CDD/SDM Primary Radiated Band Edge Measurements (40MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5965MHz
Channel	3

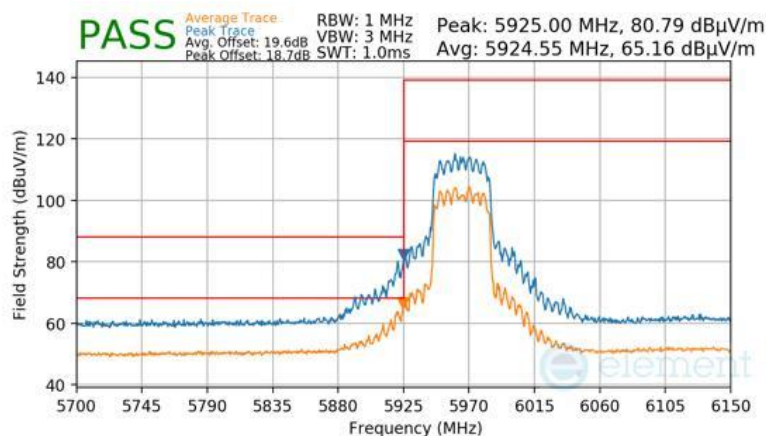

Plot 7-593 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7085MHz
Channel	227

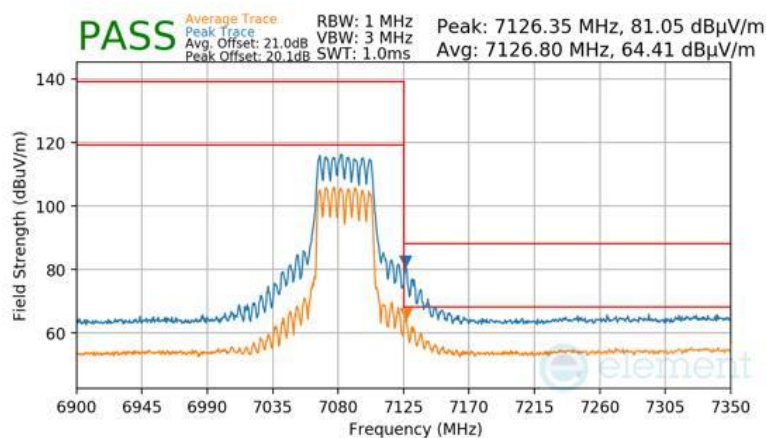


Plot 7-594 SDM Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 218 of 239

V 11.0 5/2025


7.7.17 CDD/SDM Primary Radiated Band Edge Measurements (80MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5985MHz
Channel	7

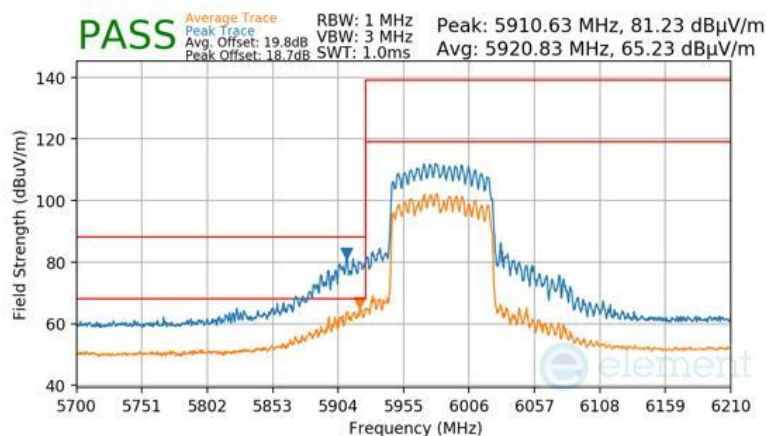

Plot 7-595 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7025MHz
Channel	215

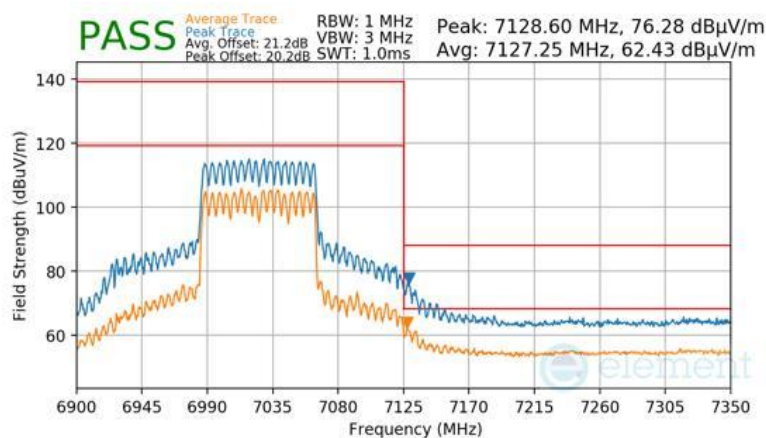


Plot 7-596 SDM Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 219 of 239

V 11.0 5/2025


7.7.18 CDD/SDM Primary Radiated Band Edge Measurements (160MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6025MHz
Channel	15

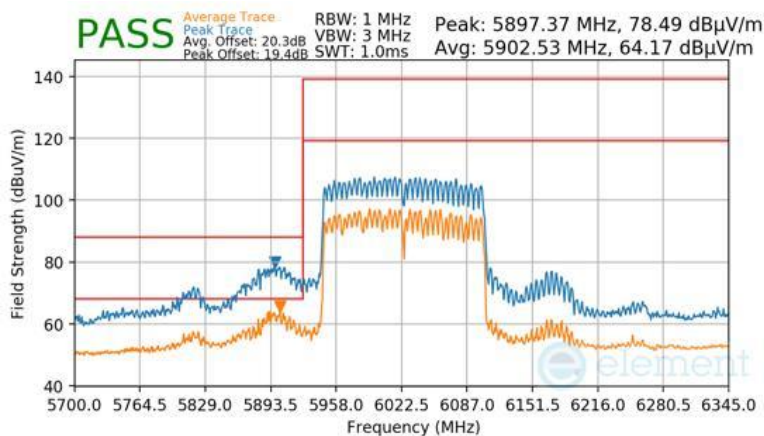

Plot 7-597 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6985MHz
Channel	207

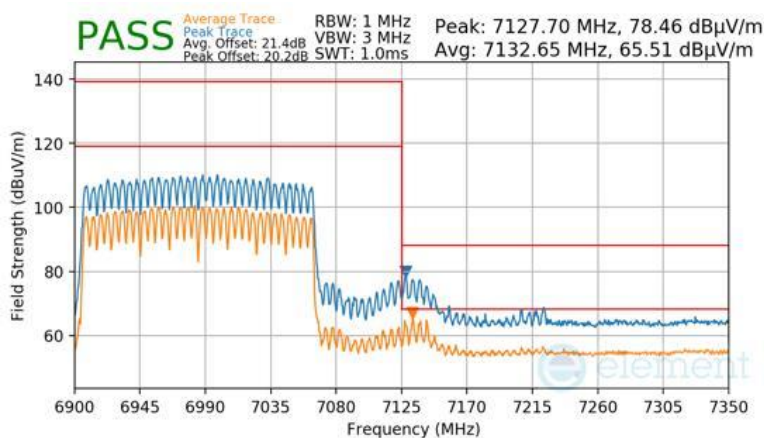


Plot 7-598 SDM Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8)


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 220 of 239

V 11.0 5/2025

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	7115MHz
Channel	233

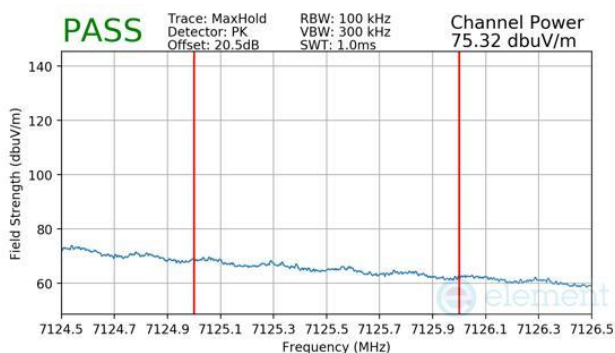

Plot 7-601 SDM Diversity Radiated Upper Band Edge (Peak – UNII Band 8)

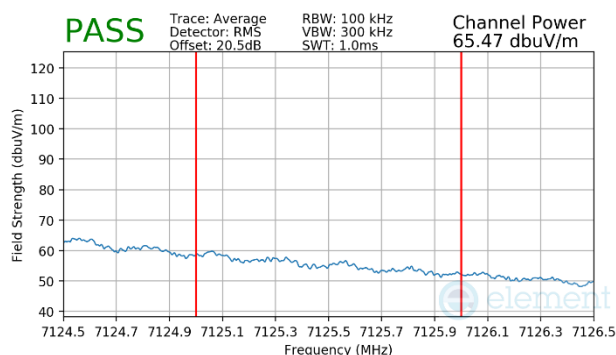


Plot 7-602 SDM Diversity Radiated Upper Band Edge (Average – UNII Band 8)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 222 of 239


V 11.0 5/2025

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5955MHz
Channel	1

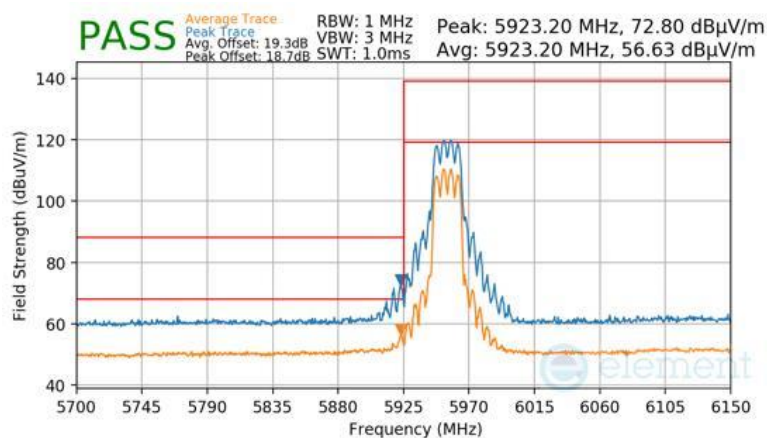

Plot 7-603 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7095MHz
Channel	229

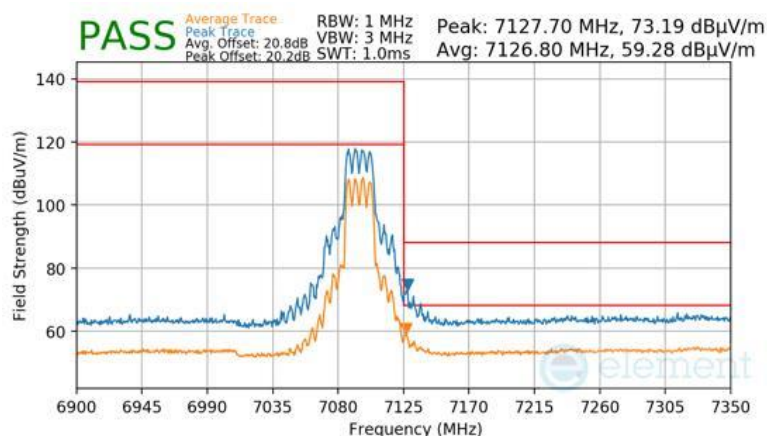


Plot 7-604 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8)


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 223 of 239

V 11.0 5/2025

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7115MHz
Channel	233

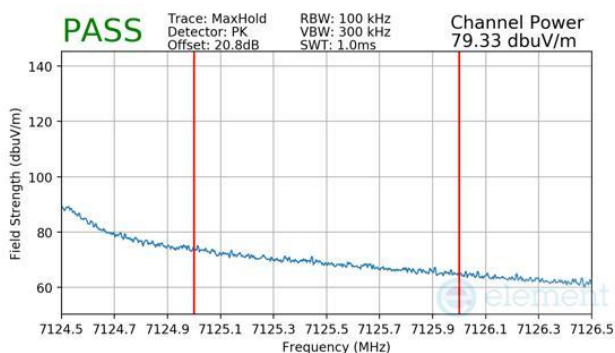

Plot 7-605 SDM Diversity Radiated Upper Band Edge (Peak – UNII Band 8)

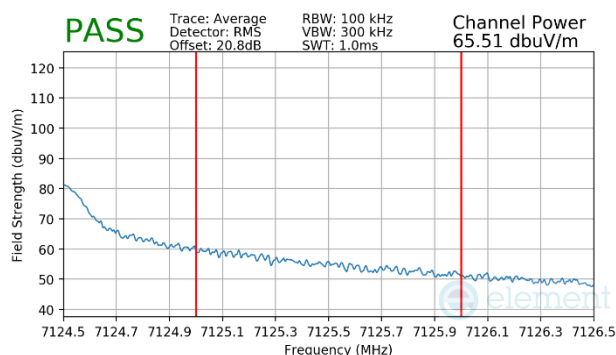

Plot 7-606 SDM Diversity Radiated Upper Band Edge (Average – UNII Band 8)


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 224 of 239

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


7.7.20 CDD/SDM Diversity Radiated Band Edge Measurements (40MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5965MHz
Channel	3

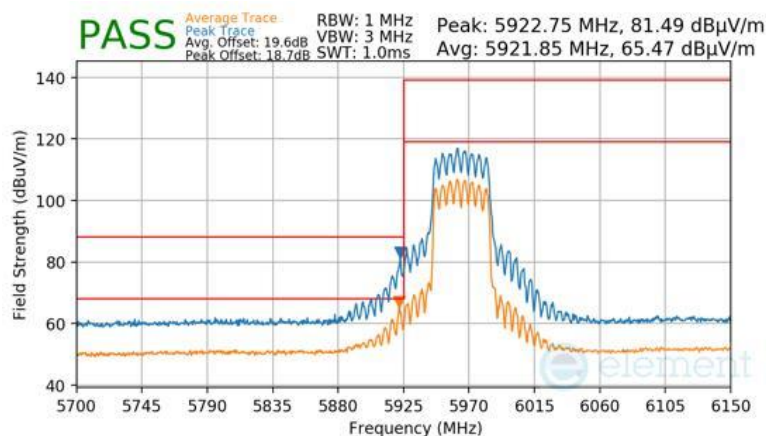

Plot 7-607 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7085MHz
Channel	227

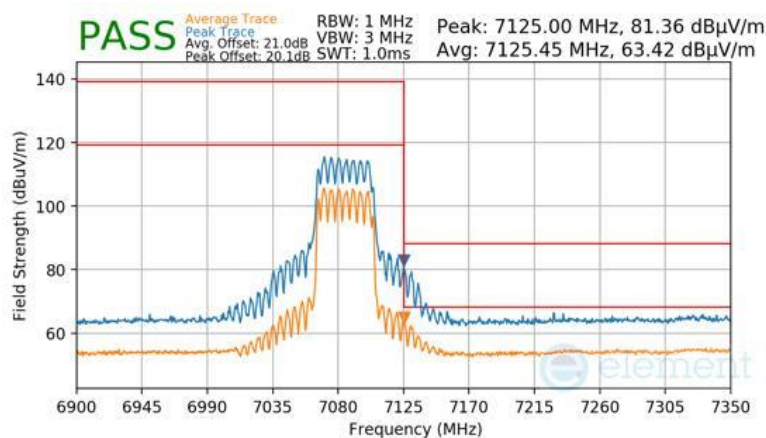


Plot 7-608 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 225 of 239

V 11.0 5/2025


7.7.21 CDD/SDM Diversity Radiated Band Edge Measurements (80MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5985MHz
Channel	7

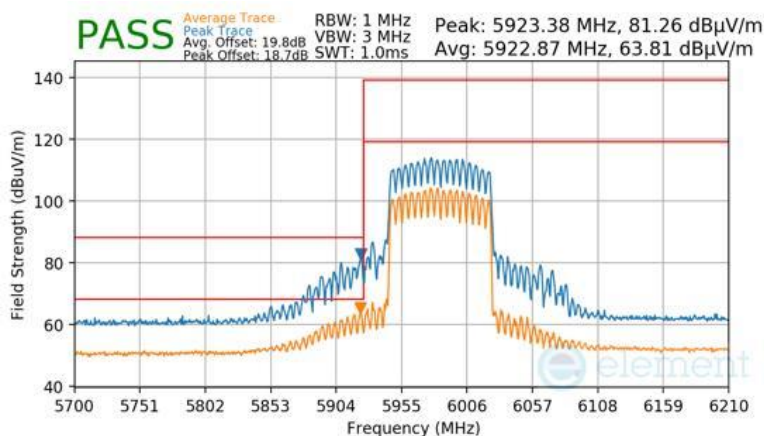

Plot 7-609 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7025MHz
Channel	215

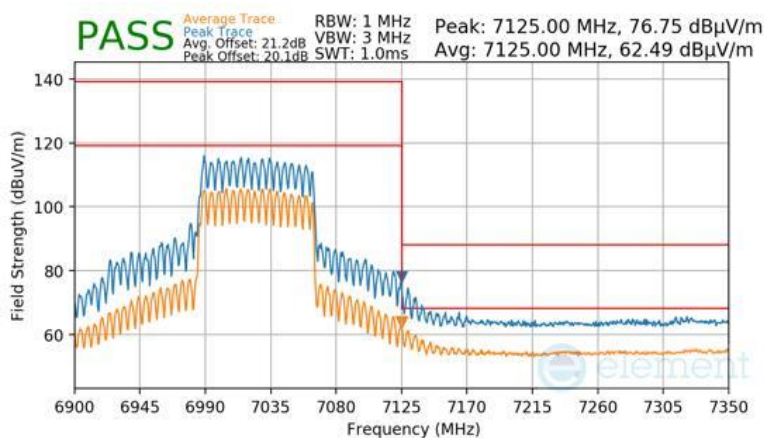


Plot 7-610 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 226 of 239


7.7.22 CDD/SDM Diversity Radiated Band Edge Measurements (160MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6025MHz
Channel	15

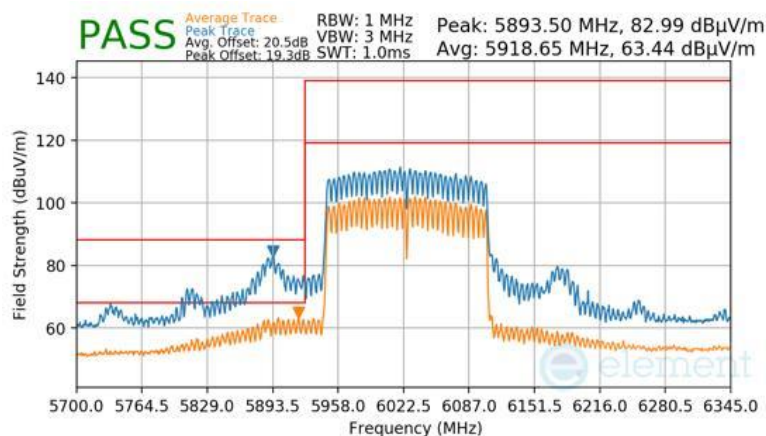

Plot 7-611 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6985MHz
Channel	207

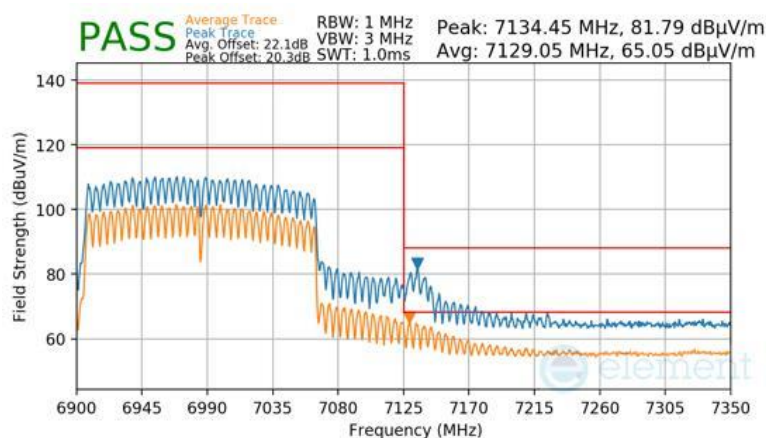

Plot 7-612 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 227 of 239

V 11.0 5/2025

7.8 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-106 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-106. Radiated Limits

Test Procedures Used

ANSI C63.10-2020

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = quasi-peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 228 of 239

V 11.0 5/2025

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

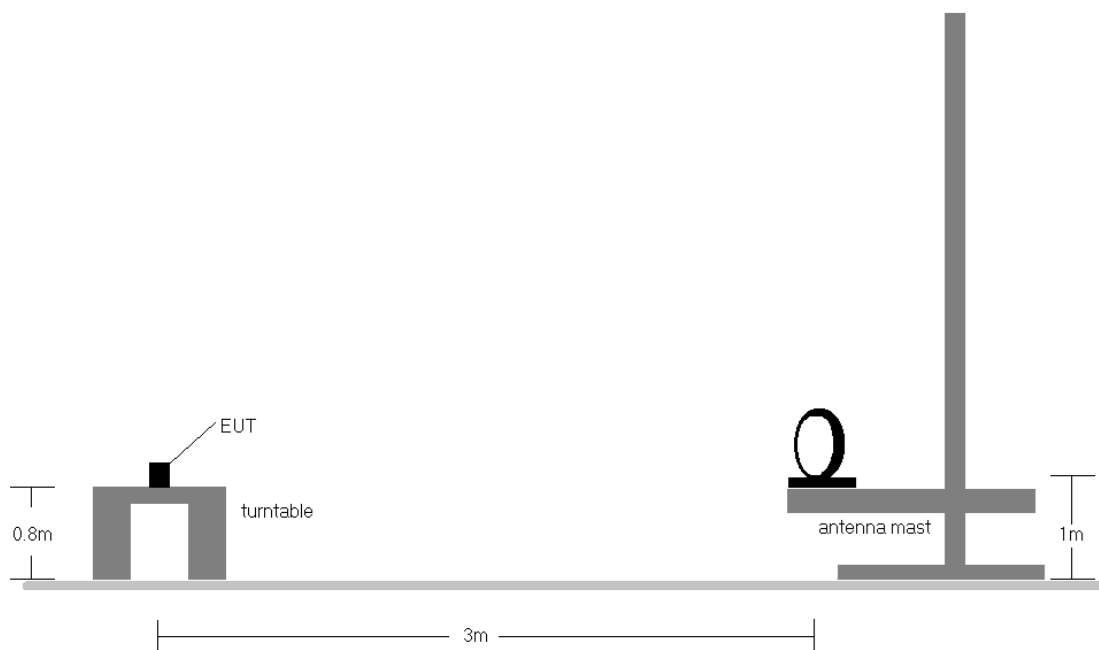


Figure 7-7. Radiated Test Setup < 30MHz

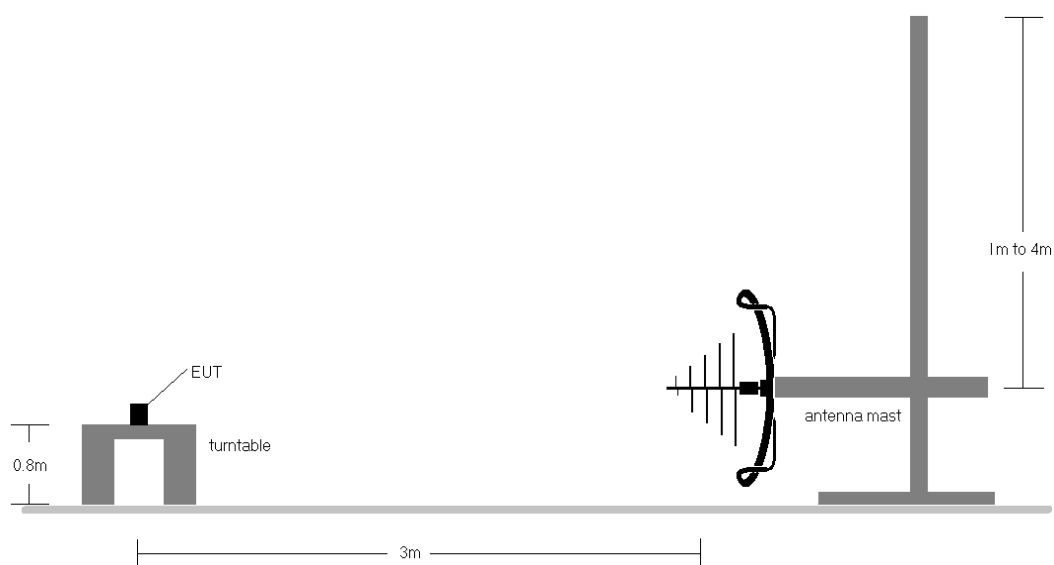


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 229 of 239	

V 11.0 5/2025

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-106.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
10. All antenna configurations were investigated and only the worst case is reported.
11. The unit was tested with all possible modes and only the highest emission is reported.

Sample Calculations


Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]} - \text{Preamp Gain}_{[dB]}$
- $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$

FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device		Page 230 of 239

V 11.0 5/2025

7.8.1 SDM Primary Radiated Spurious Emissions Measurements (Below 1GHz)

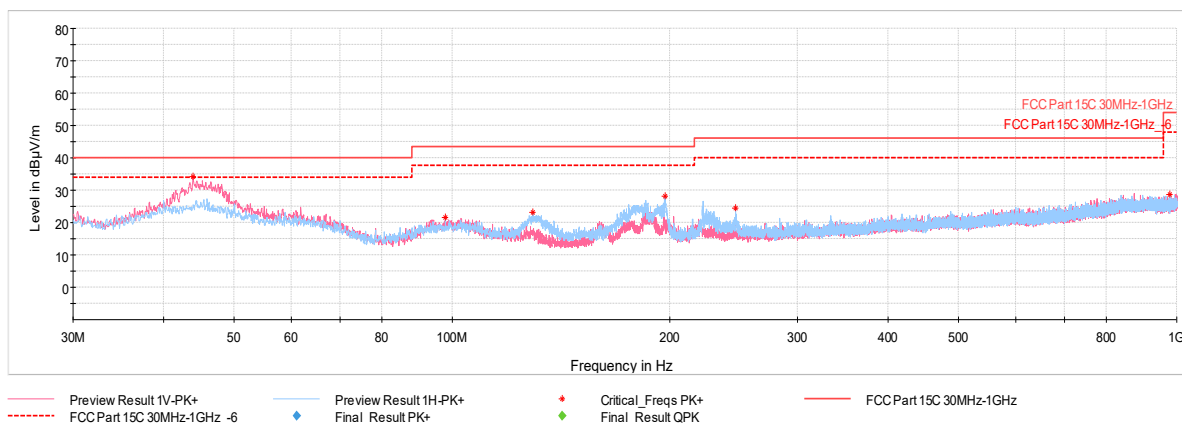


Plot 7-613. Radiated Spurious Emissions below 1GHz CDD Primary, 802.11be, Ch.45 with Laptop

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
43.92	Quasi-Peak	V	104	13	-61.35	-14.75	30.90	40.00	-9.10
97.90	Max Peak	H	200	93	-68.77	-16.74	21.49	43.52	-22.03
129.38	Max Peak	H	200	160	-64.43	-19.53	23.04	43.52	-20.48
196.60	Max Peak	H	200	257	-63.26	-15.64	28.10	43.52	-15.42
246.16	Max Peak	H	100	260	-68.11	-14.52	24.37	46.02	-21.65
978.27	Max Peak	H	100	34	-76.84	-1.41	28.75	53.98	-25.23

Table 7-107. Radiated Spurious Emissions Measurement below 1GHz CDD Primary, 802.11be, Ch.45 with Laptop

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 231 of 239

7.8.2 SDM Diversity Radiated Spurious Emissions Measurements (Below 1GHz)

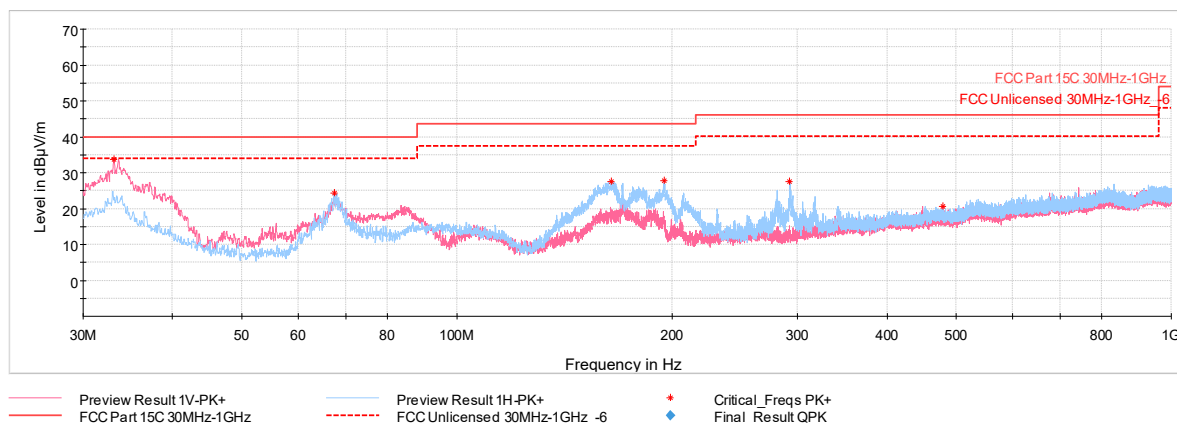

Plot 7-614. Radiated Spurious Emissions below 1GHz CDD Diversity, 802.11be, Ch.45 with Laptop

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
33.10	Max Peak	V	100	97	-55.11	-18.22	30.90	40.00	-9.10
67.44	Max Peak	H	200	79	-60.26	-22.50	21.49	40.00	-18.51
164.39	Max Peak	H	200	229	-60.26	-19.14	23.04	43.52	-20.48
194.95	Max Peak	H	100	9	-61.01	-18.24	28.10	43.52	-15.42
292.58	Max Peak	H	100	256	-64.21	-15.37	24.37	46.02	-21.65
478.63	Max Peak	V	100	225	-75.46	-10.90	28.75	46.02	-17.27

Table 7-108. Radiated Spurious Emissions Measurement below 1GHz CDD Diversity, 802.11be, Ch.45 with Laptop

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 232 of 239

V 11.0 5/2025

7.9 AC Line-Conducted Emissions Measurement

§15.407; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-109. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 233 of 239

V 11.0 5/2025

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

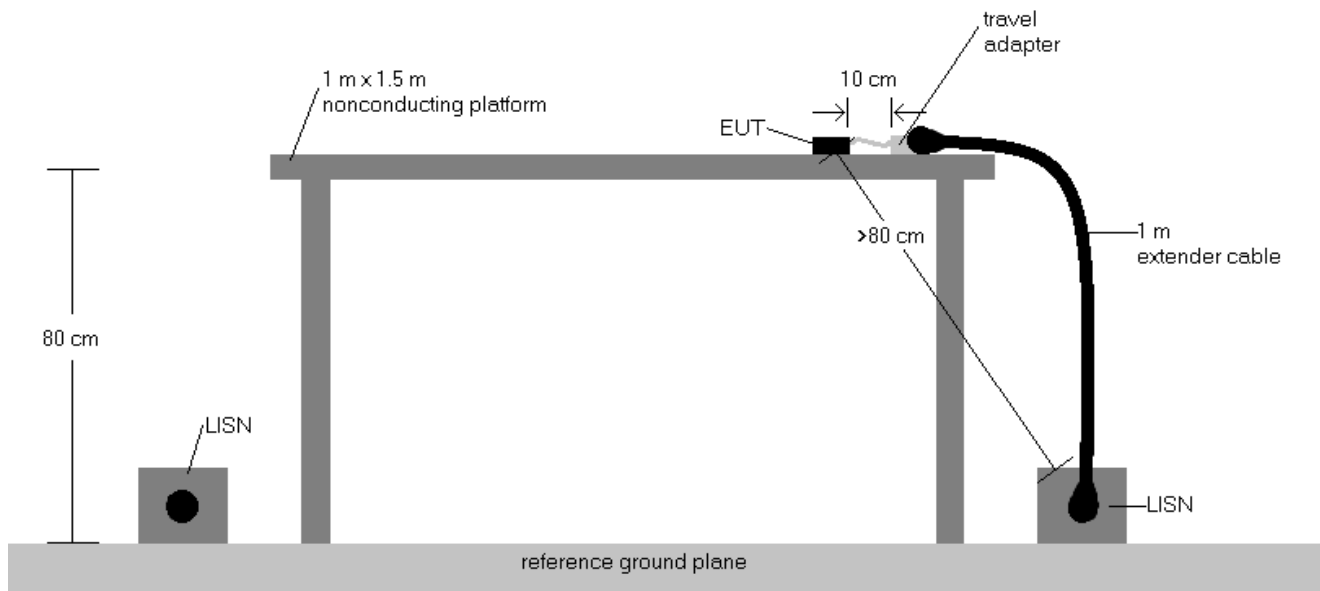



Figure 7-9. Test Instrument & Measurement Setup

Test Notes

- All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
- Both configurations below were investigated, and the worst case has been reported.
 - EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - EUT powered by host PC via USB-C cable with wire charger
- The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
- $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
- $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
- $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
- Traces shown in plots are made using quasi-peak and average detectors.
- Deviations to the Specifications: None.
- The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 234 of 239

V 11.0 5/2025

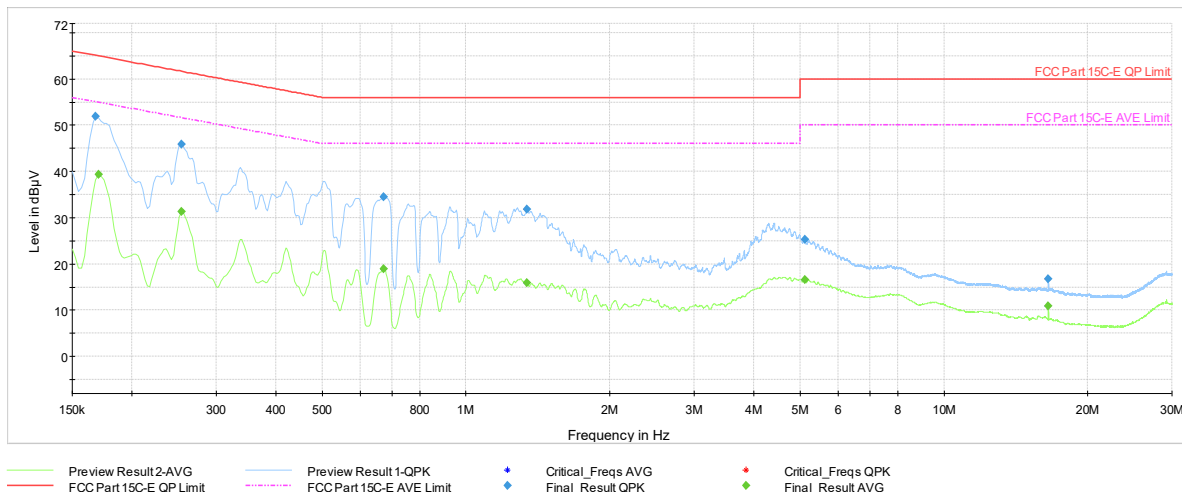


Plot 7-615. AC Line Conducted Plot with 802.11be CDD Primary – Ch.45 (L1), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.168	FINAL	51.8	—	65.06	-13.22	L1	GND
0.170	FINAL	—	39.42	54.95	-15.53	L1	GND
0.254	FINAL	—	31.32	51.64	-20.32	L1	GND
0.254	FINAL	45.9	—	61.64	-15.71	L1	GND
0.672	FINAL	—	18.86	46.00	-27.14	L1	GND
0.672	FINAL	34.6	—	56.00	-21.44	L1	GND
1.343	FINAL	31.8	—	56.00	-24.24	L1	GND
1.343	FINAL	—	15.86	46.00	-30.14	L1	GND
5.114	FINAL	25.3	—	60.00	-34.71	L1	GND
5.116	FINAL	—	16.54	50.00	-33.46	L1	GND
16.541	FINAL	—	10.94	50.00	-39.06	L1	GND
16.541	FINAL	16.7	—	60.00	-43.31	L1	GND

Table 7-110. AC Line Conducted Data with 802.11be CDD Primary – Ch. 45 (L1) with AC/DC adapter

FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device		Page 235 of 239

V 11.0 5/2025

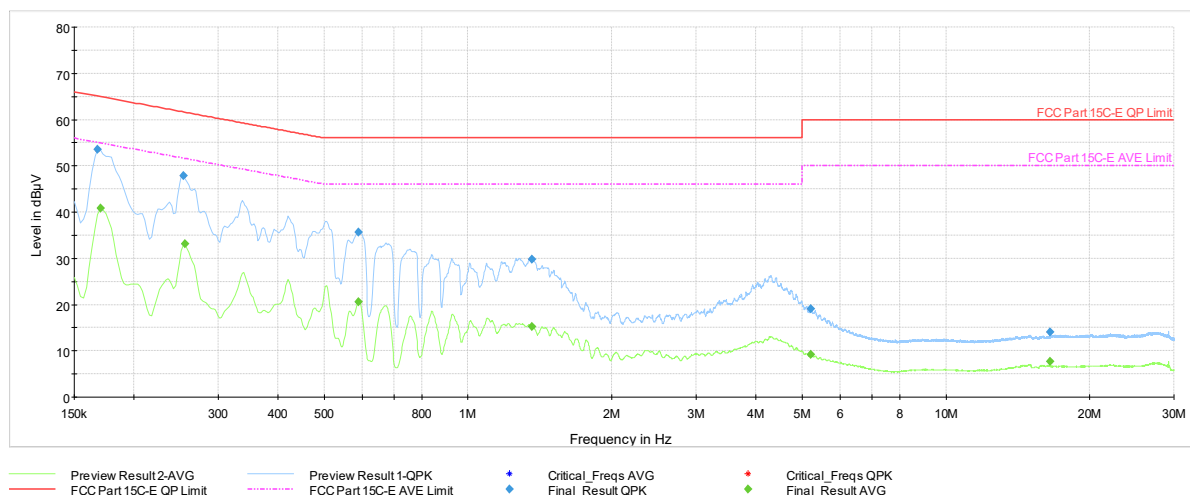


Plot 7-616. AC Line Conducted Plot with 802.11be CDD Primary – Ch. 45 (N), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.168	FINAL	53.6	—	65.06	-11.50	N	GND
0.170	FINAL	—	40.77	54.95	-14.18	N	GND
0.254	FINAL	47.9	—	61.64	-13.78	N	GND
0.256	FINAL	—	33.09	51.57	-18.48	N	GND
0.591	FINAL	35.7	—	56.00	-20.32	N	GND
0.591	FINAL	—	20.65	46.00	-25.35	N	GND
1.363	FINAL	29.7	—	56.00	-26.27	N	GND
1.363	FINAL	—	15.19	46.00	-30.81	N	GND
5.213	FINAL	—	9.23	50.00	-40.77	N	GND
5.222	FINAL	19.1	—	60.00	-40.93	N	GND
16.541	FINAL	—	7.62	50.00	-42.38	N	GND
16.541	FINAL	14.0	—	60.00	-45.99	N	GND

Table 7-111. AC Line Conducted Data with 802.11be CDD Primary – Ch. 45 (N), with AC/DC adapter

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 236 of 239

V 11.0 5/2025

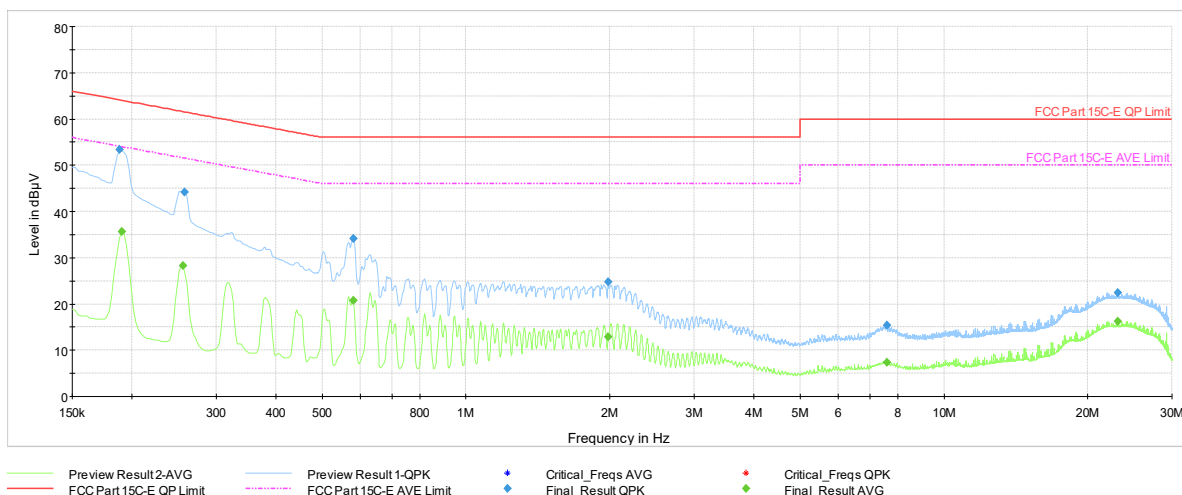


Plot 7-617. AC Line Conducted Plot with 802.11be CDD Diversity – Ch.45 (L1), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.188	FINAL	53.5	—	64.11	-10.66	L1	GND
0.191	FINAL	—	35.65	54.02	-18.37	L1	GND
0.256	FINAL	—	28.31	51.57	-23.26	L1	GND
0.258	FINAL	44.2	—	61.50	-17.32	L1	GND
0.582	FINAL	—	20.72	46.00	-25.28	L1	GND
0.582	FINAL	34.2	—	56.00	-21.83	L1	GND
1.984	FINAL	24.7	—	56.00	-31.30	L1	GND
1.986	FINAL	—	12.87	46.00	-33.13	L1	GND
7.589	FINAL	15.4	—	60.00	-44.64	L1	GND
7.593	FINAL	—	7.44	50.00	-42.56	L1	GND
23.087	FINAL	—	16.17	50.00	-33.83	L1	GND
23.087	FINAL	22.4	—	60.00	-37.65	L1	GND

Table 7-112. AC Line Conducted Data with 802.11be CDD Diversity – Ch. 45 (L1) with AC/DC adapter

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 237 of 239

V 11.0 5/2025

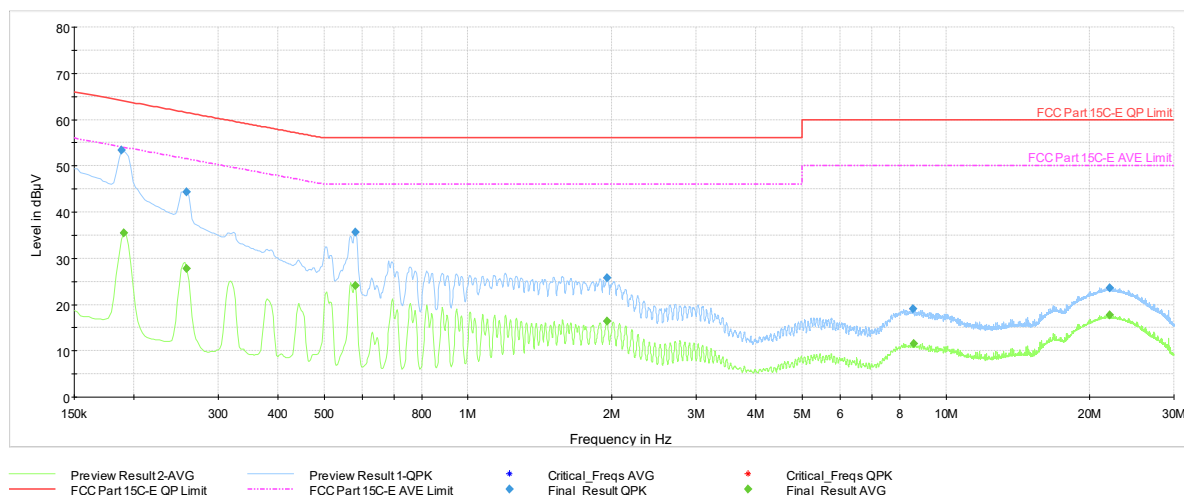

Plot 7-618. AC Line Conducted Plot with 802.11be CDD Diversity – Ch. 45 (N), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.188	FINAL	53.3	—	64.11	-10.80	N	GND
0.191	FINAL	—	35.55	54.02	-18.47	N	GND
0.258	FINAL	—	27.81	51.50	-23.69	N	GND
0.258	FINAL	44.3	—	61.50	-17.20	N	GND
0.582	FINAL	—	24.13	46.00	-21.87	N	GND
0.582	FINAL	35.7	—	56.00	-20.29	N	GND
1.955	FINAL	—	16.40	46.00	-29.60	N	GND
1.957	FINAL	25.8	—	56.00	-30.21	N	GND
8.540	FINAL	19.1	—	60.00	-40.95	N	GND
8.552	FINAL	—	11.59	50.00	-38.41	N	GND
22.038	FINAL	—	17.74	50.00	-32.26	N	GND
22.038	FINAL	23.6	—	60.00	-36.37	N	GND

Table 7-113. AC Line Conducted Data with 802.11be CDD Diversity – Ch. 45 (N), with AC/DC adapter

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 238 of 239

V 11.0 5/2025

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3357** and **IC: 579C-A3357** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-248 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 239 of 239

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.