



MRU

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 70
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 1

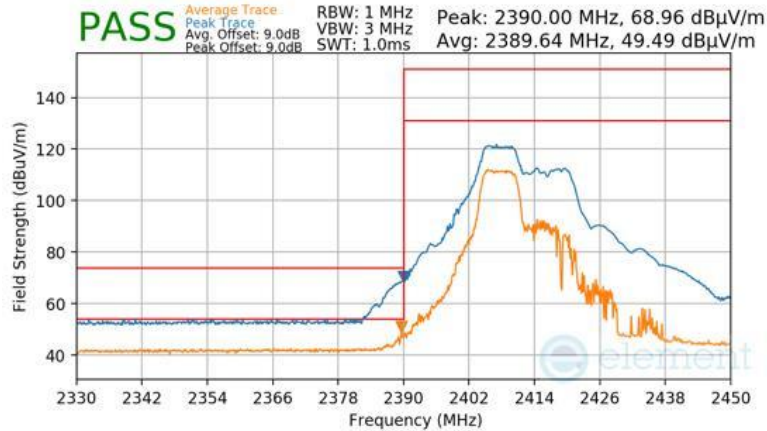

Plot 7-139 Radiated Restricted Lower Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 71
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 1

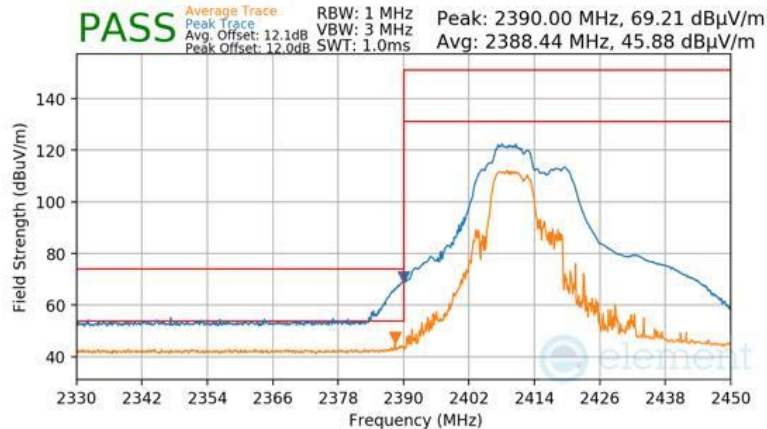

Plot 7-140 Radiated Restricted Lower Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 109 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 1

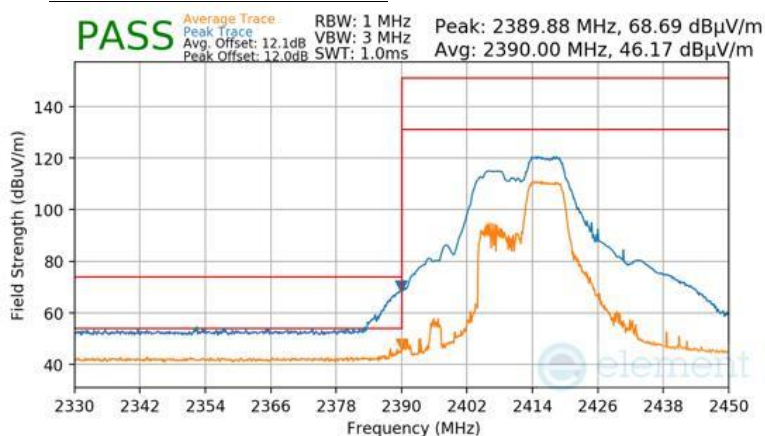

Plot 7-141 Radiated Restricted Lower Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 71
Distance of Measurements: 3 Meters
Operating Frequency: 2417MHz
Channel: 2

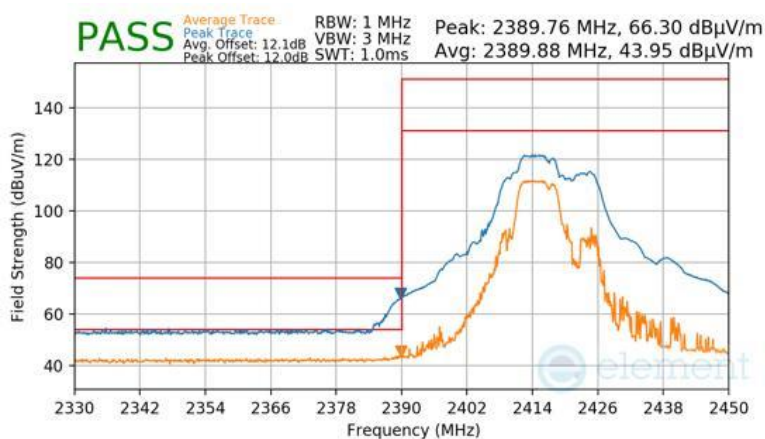

Plot 7-142 Radiated Restricted Lower Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 110 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 71
Distance of Measurements: 3 Meters
Operating Frequency: 2422MHz
Channel: 3

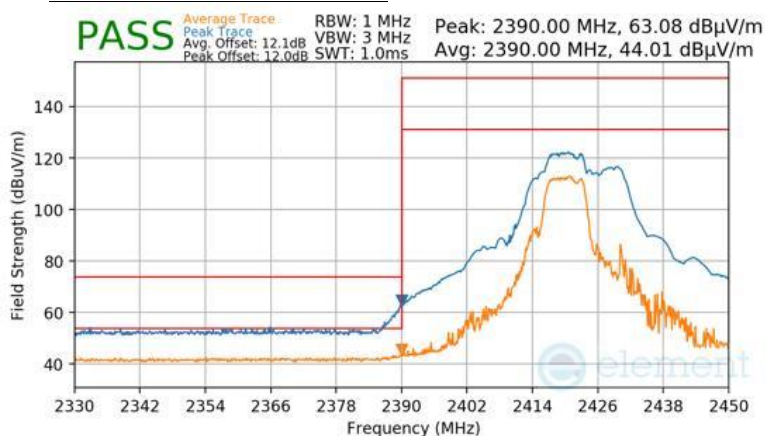

Plot 7-143 Radiated Restricted Lower Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 2422MHz
Channel: 3

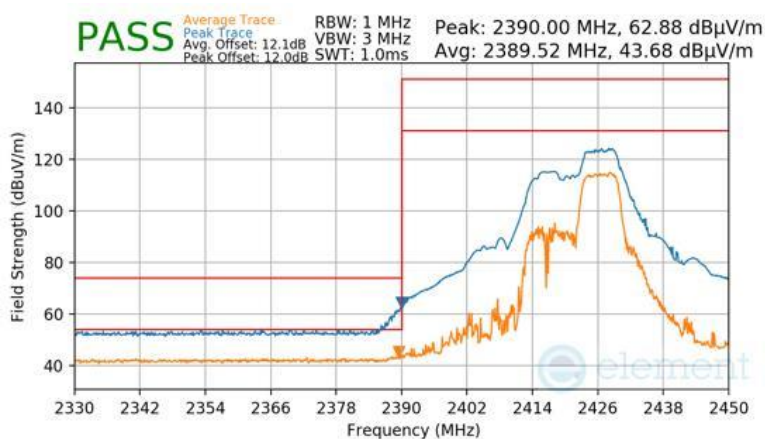

Plot 7-144 Radiated Restricted Lower Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 111 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 70
Distance of Measurements: 3 Meters
Operating Frequency: 2452MHz
Channel: 9

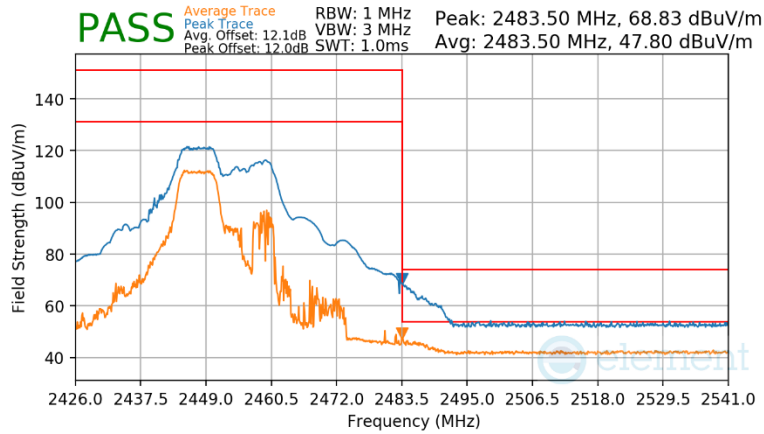

Plot 7-145 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 71
Distance of Measurements: 3 Meters
Operating Frequency: 2452MHz
Channel: 9

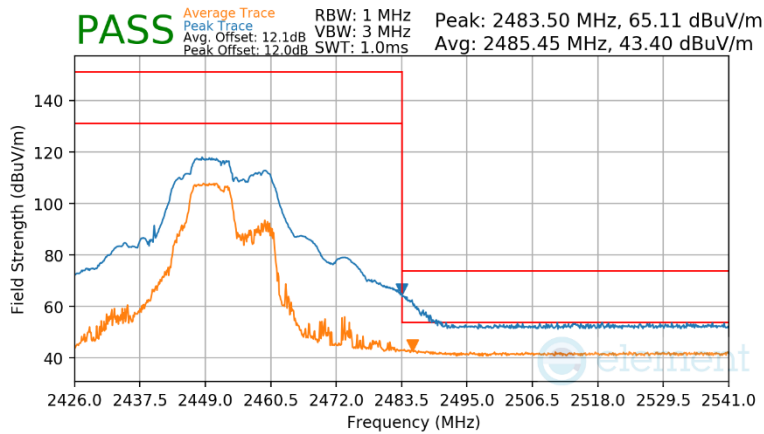

Plot 7-146 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 112 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 2452MHz
Channel: 9

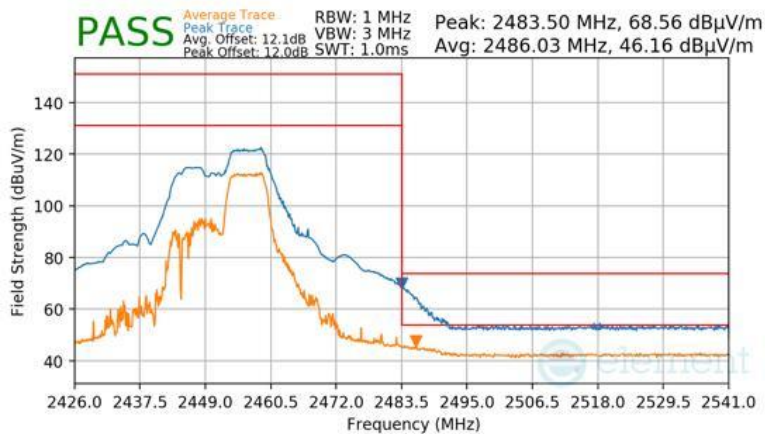

Plot 7-147 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 70
Distance of Measurements: 3 Meters
Operating Frequency: 2457MHz
Channel: 10

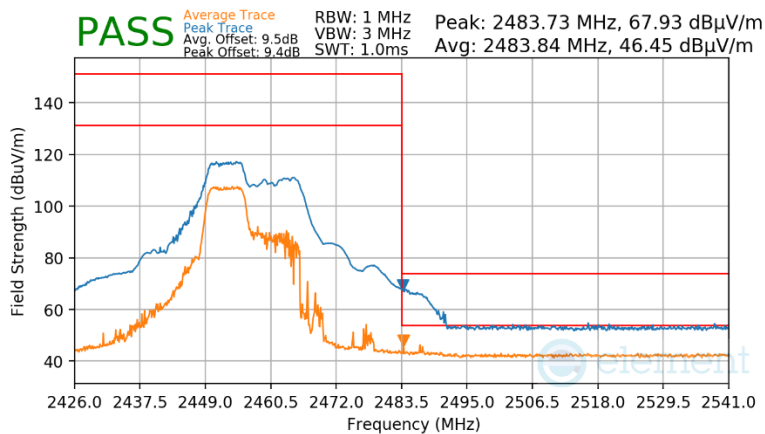

Plot 7-148 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 113 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 71
Distance of Measurements: 3 Meters
Operating Frequency: 2457MHz
Channel: 10

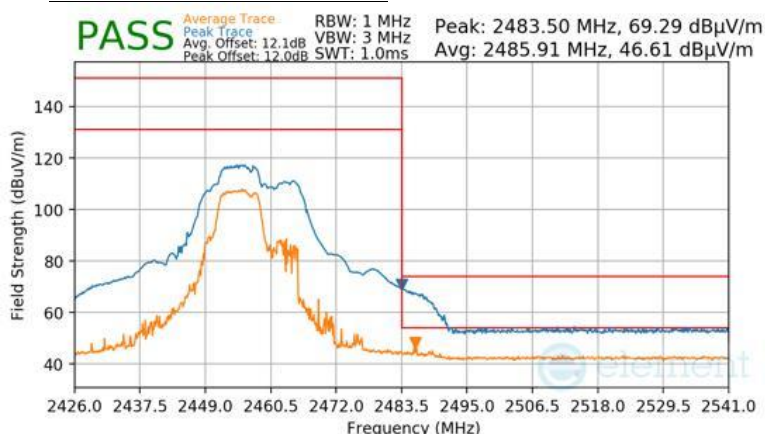

Plot 7-149 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 2457MHz
Channel: 10

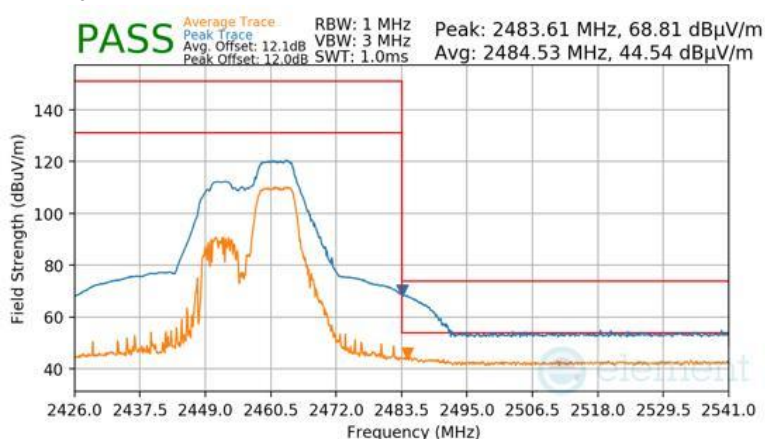

Plot 7-150 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 114 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 70
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

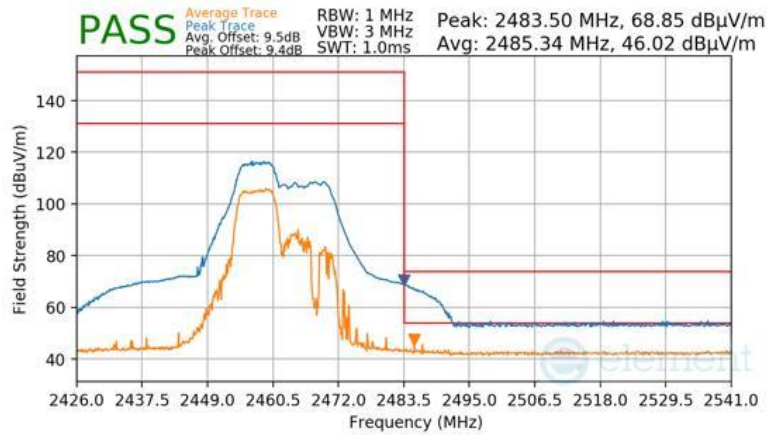

Plot 7-151 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 71
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

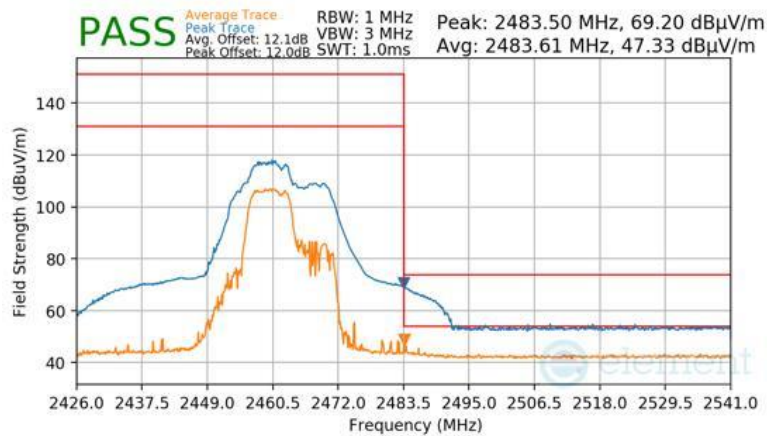

Plot 7-152 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 115 of 162

Mode:	802.11be OFDMA
Transfer Rate:	MCS9
RU Index:	72
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

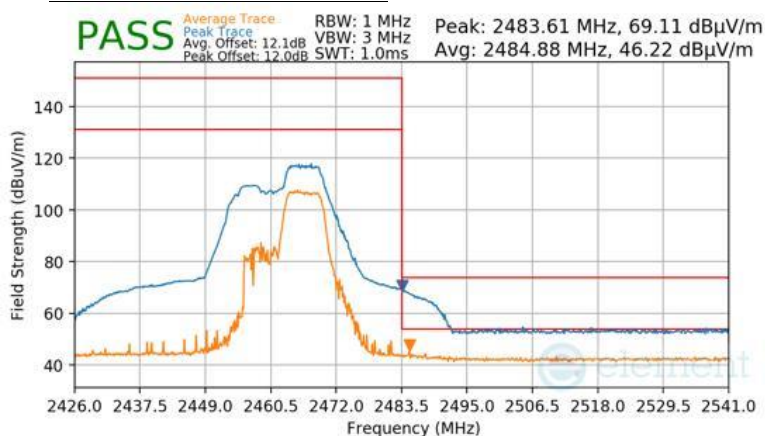

Plot 7-153 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)


Mode:	802.11be OFDMA
Transfer Rate:	MCS9
RU Index:	70
Distance of Measurements:	3 Meters
Operating Frequency:	2467MHz
Channel:	12

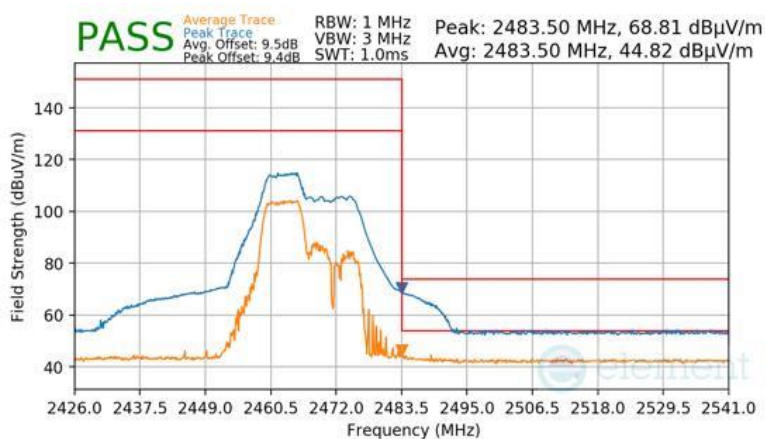

Plot 7-154 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 116 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 71
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

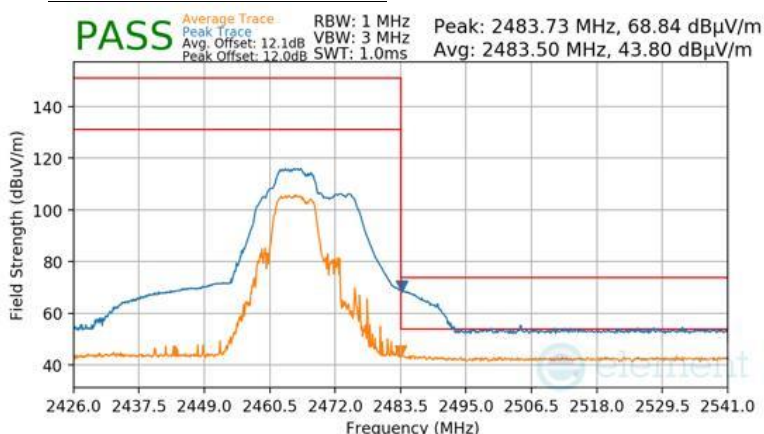

Plot 7-155 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

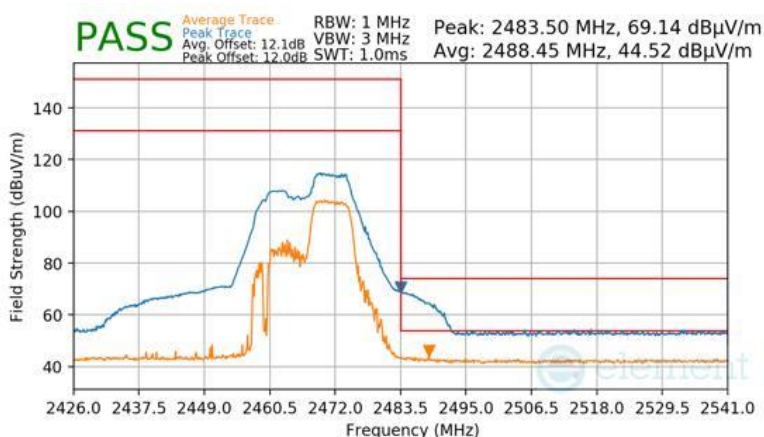

Plot 7-156 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 117 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 70
Distance of Measurements: 3 Meters
Operating Frequency: 2472MHz
Channel: 13

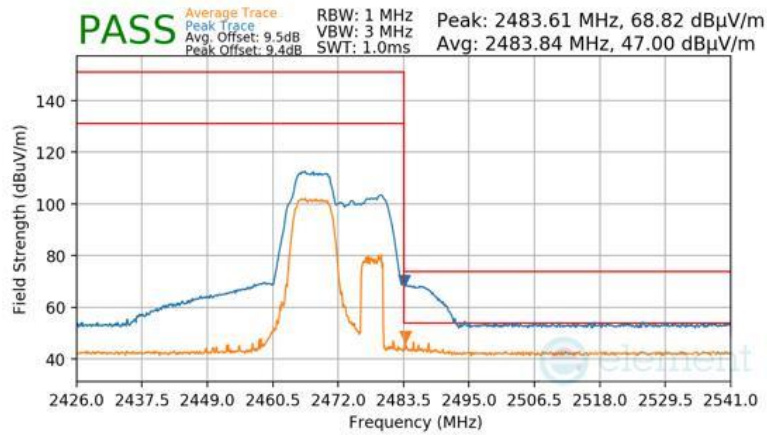

Plot 7-157 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 71
Distance of Measurements: 3 Meters
Operating Frequency: 2472MHz
Channel: 13

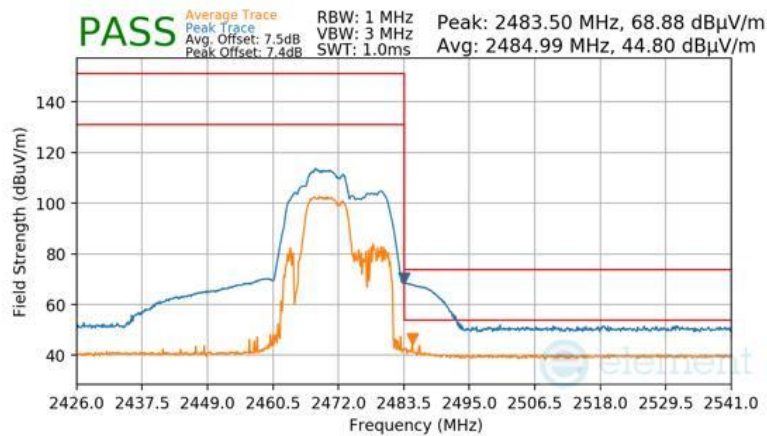

Plot 7-158 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)

FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 118 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 2472MHz
Channel: 13

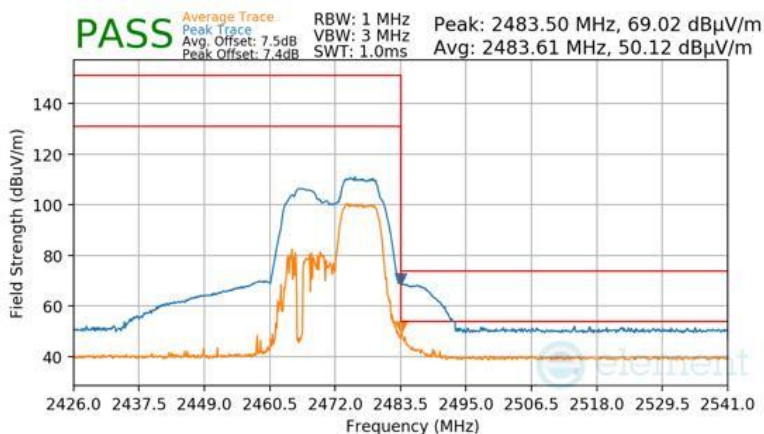


Plot 7-159 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)

FCC ID: BCGA3358 IC: 579C-A3358	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 119 of 162

V 11.0 5/2025


RU242

Mode:	802.11be OFDMA
Transfer Rate:	MCS9
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

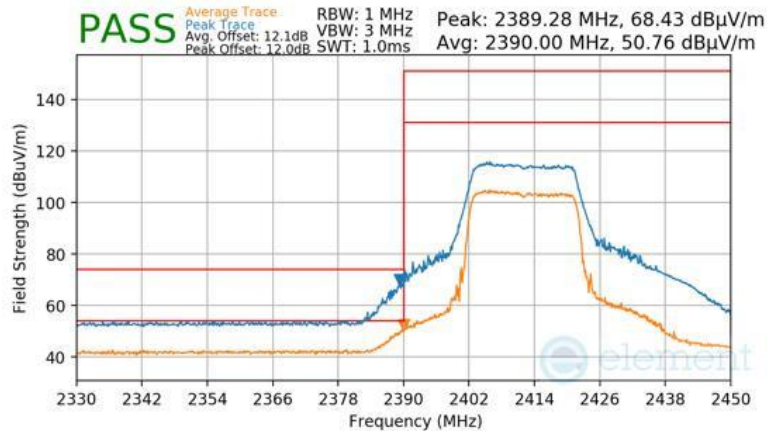

Plot 7-160 Radiated Restricted Lower Band Edge Measurement Antenna 2a (Peak & Average – RU242)


Mode:	802.11be OFDMA
Transfer Rate:	MCS9
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	2417MHz
Channel:	2

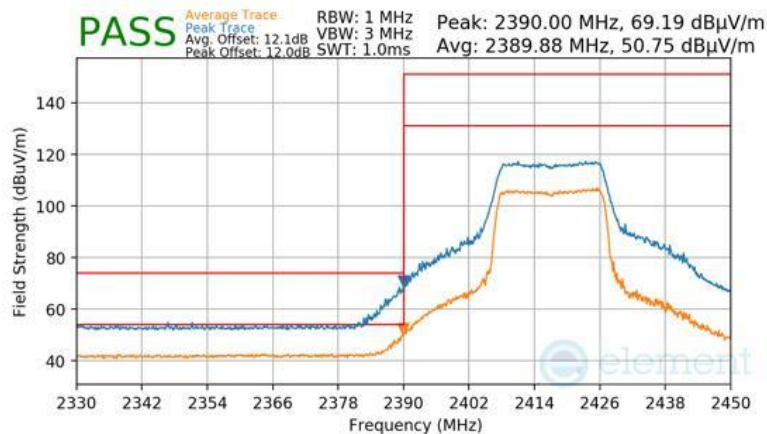

Plot 7-161 Radiated Restricted Lower Band Edge Measurement Antenna 2a (Peak & Average – RU242)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 120 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2422MHz
Channel: 3

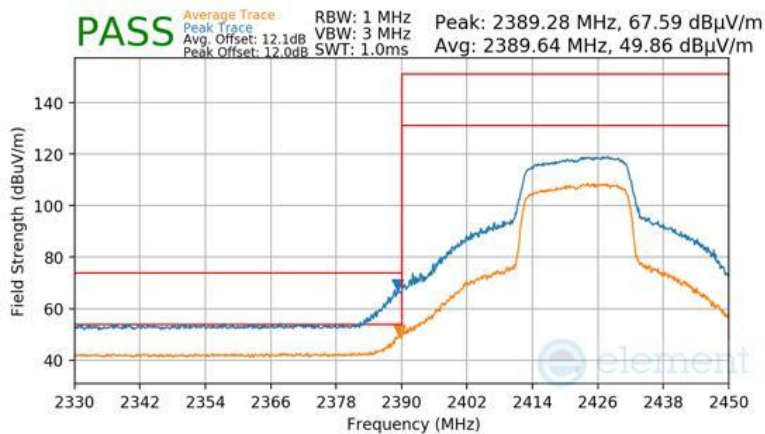

Plot 7-162 Radiated Restricted Lower Band Edge Measurement Antenna 2a (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2427MHz
Channel: 4

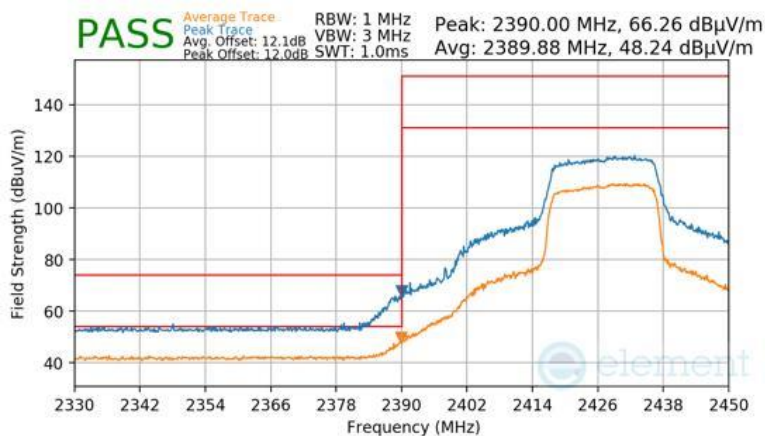

Plot 7-163 Radiated Restricted Lower Band Edge Measurement Antenna 2a (Peak & Average – RU242)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 121 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2432MHz
Channel: 5

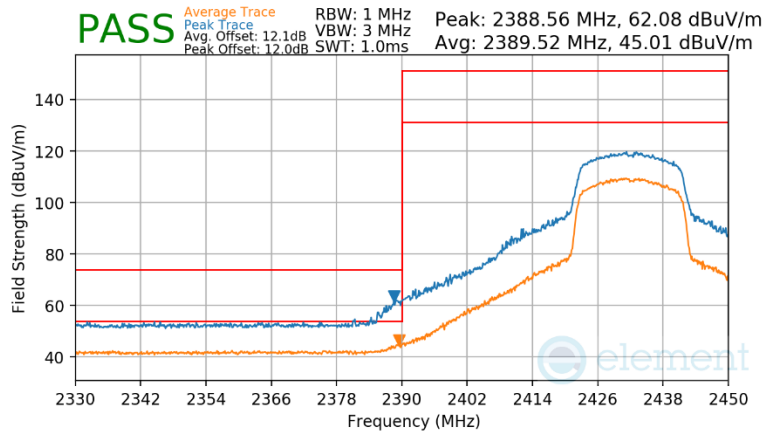

Plot 7-164 Radiated Restricted Lower Band Edge Measurement Antenna 2a (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 6

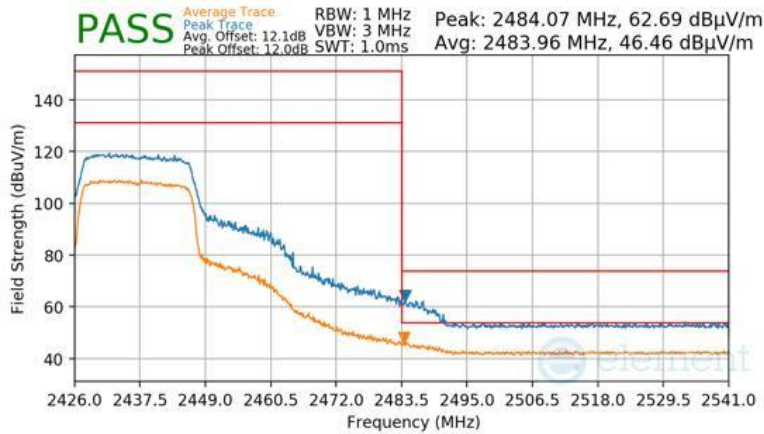

Plot 7-165 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU242)


FCC ID: BCGA3358 IC: 579C-A3358			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device		Page 122 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2442MHz
Channel: 7

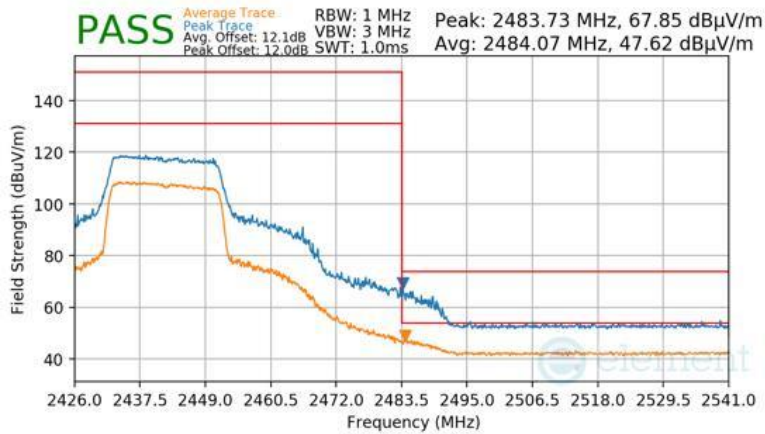

Plot 7-166 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2447MHz
Channel: 8

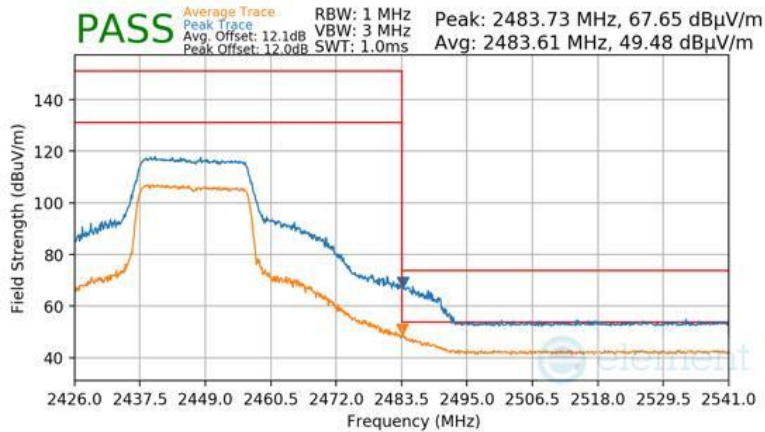

Plot 7-167 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU242)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 123 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2452MHz
Channel: 9

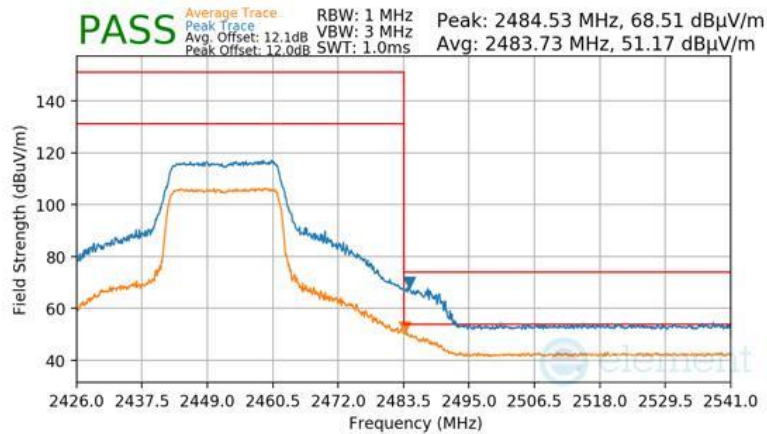

Plot 7-168 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2457MHz
Channel: 10

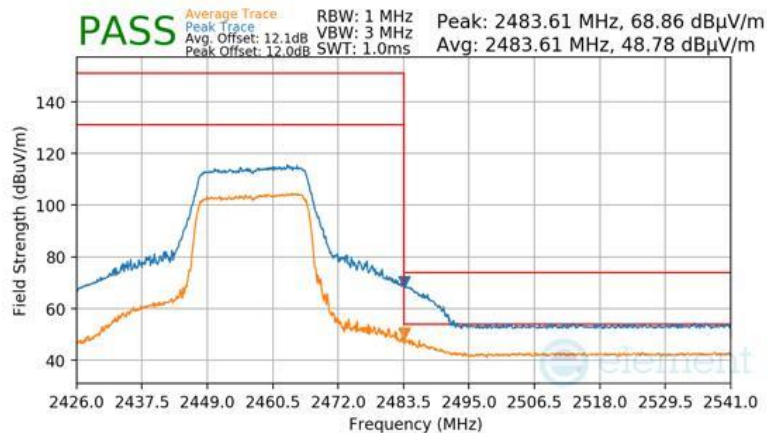

Plot 7-169 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU242)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 124 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

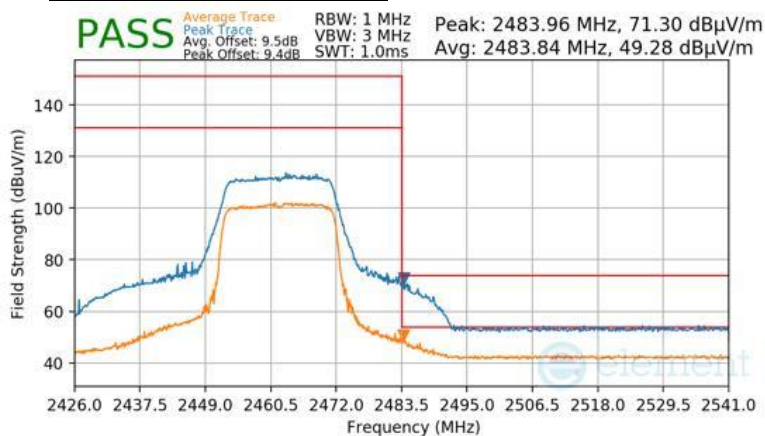

Plot 7-170 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

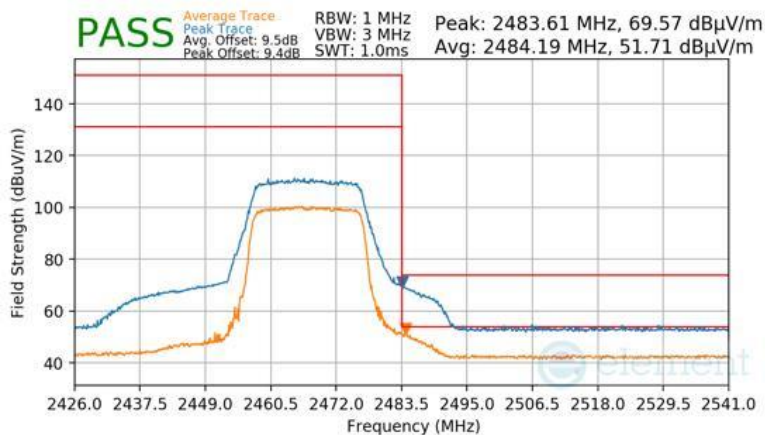

Plot 7-171 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU242)

FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 125 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2472MHz
Channel: 13

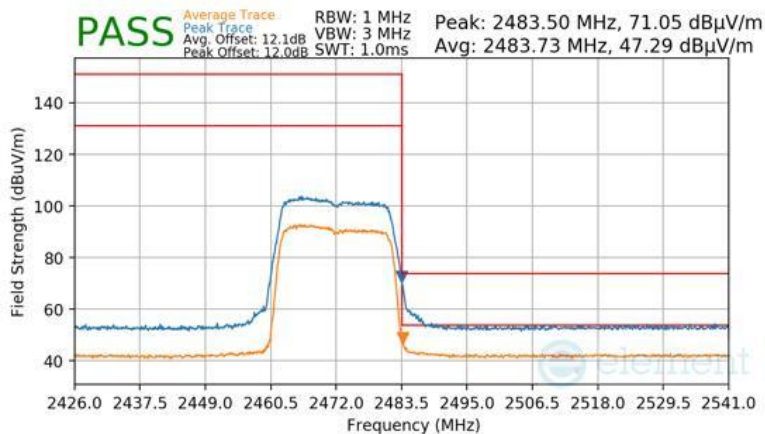

Plot 7-172 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU242)


FCC ID: BCGA3358 IC: 579C-A3358	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 126 of 162

V 11.0 5/2025

7.7.4 CDD Radiated Restricted Band Edge Measurements


RU26

Mode: 802.11be OFDMA
 Transfer Rate: MCS9
 RU Index: 0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

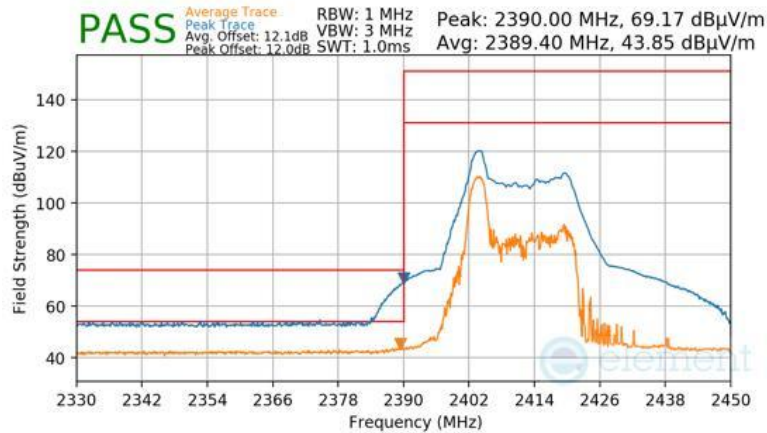

Plot 7-173 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU26)


Mode: 802.11be OFDMA
 Transfer Rate: MCS9
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

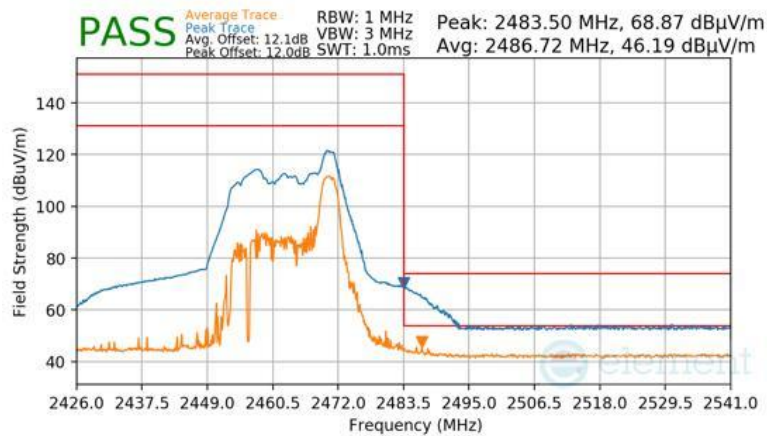

Plot 7-174 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU26)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 127 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 8
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

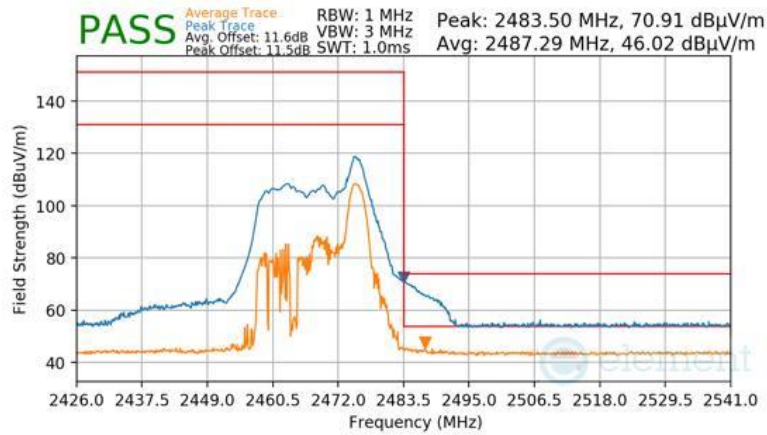

Plot 7-175 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU26)

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 2472MHz
Channel: 13

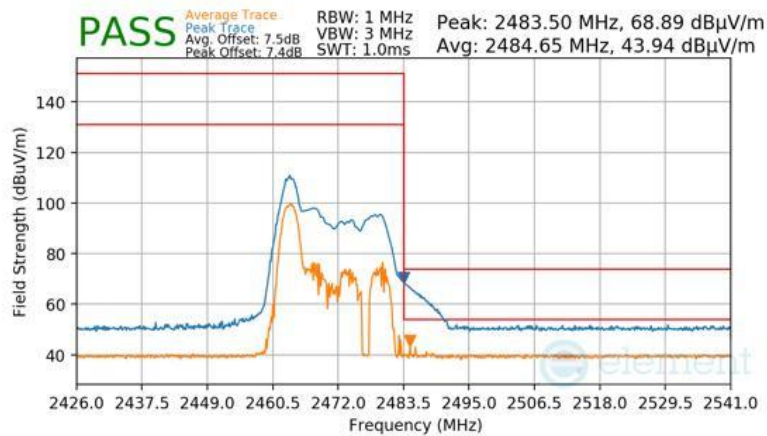


Plot 7-176 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU26)

FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 128 of 162


MRU

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 70
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 1

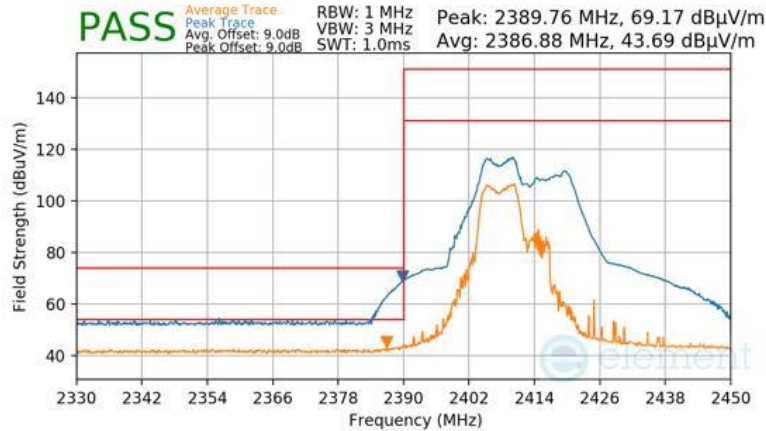

Plot 7-177 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU52+26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 71
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 1

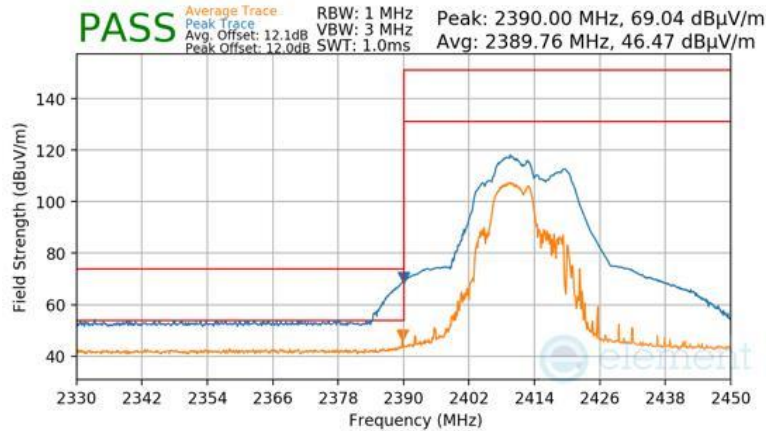

Plot 7-178 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU52+26)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 129 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 1

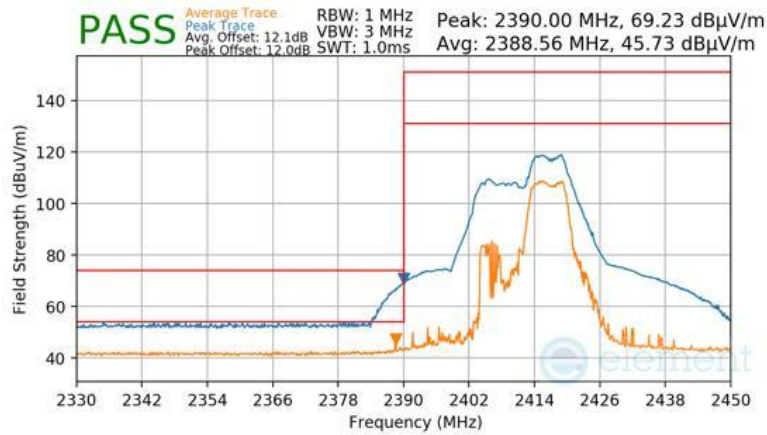

Plot 7-179 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU52+26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 70
Distance of Measurements: 3 Meters
Operating Frequency: 2417MHz
Channel: 2

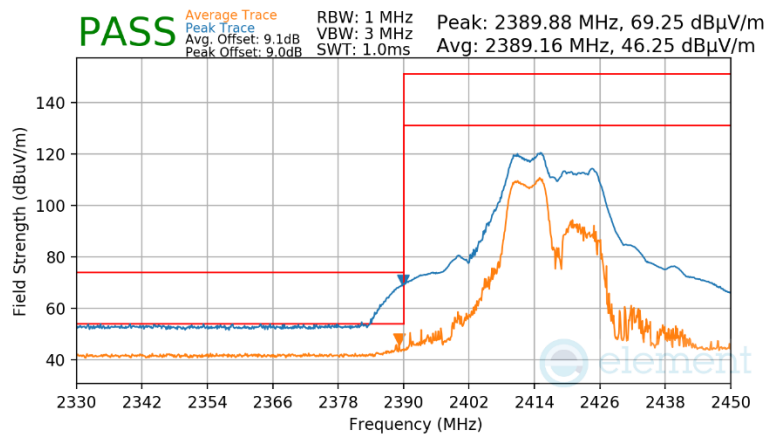

Plot 7-180 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU52+26)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 130 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 71
Distance of Measurements: 3 Meters
Operating Frequency: 2417MHz
Channel: 2

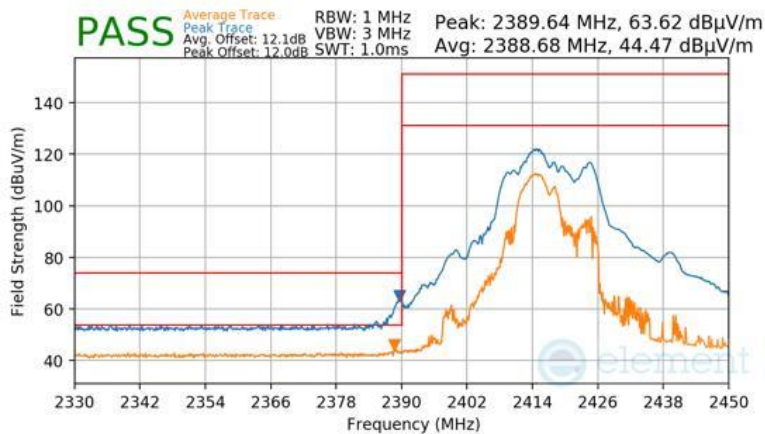

Plot 7-181 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU52+26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 2417MHz
Channel: 2

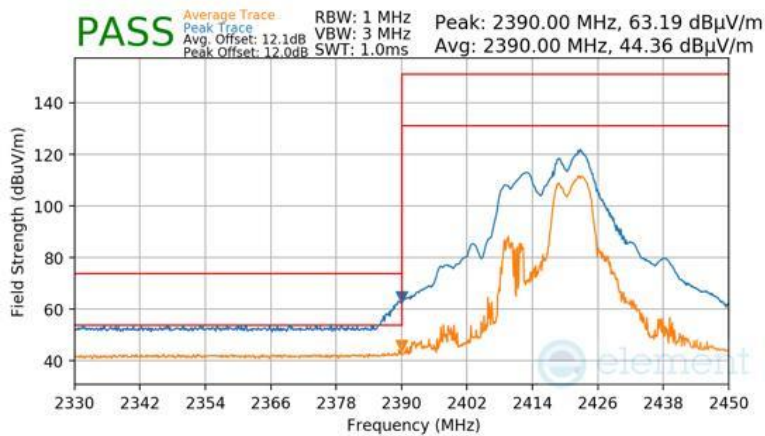

Plot 7-182 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU52+26)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 131 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 70
Distance of Measurements: 3 Meters
Operating Frequency: 2422MHz
Channel: 3

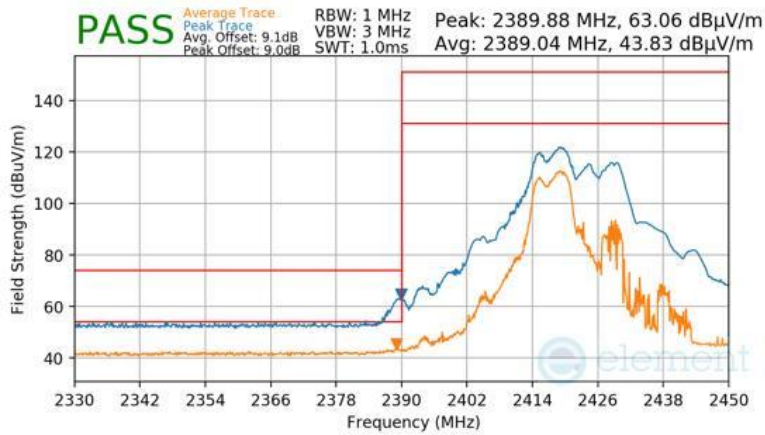

Plot 7-183 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU52+26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 71
Distance of Measurements: 3 Meters
Operating Frequency: 2422MHz
Channel: 3

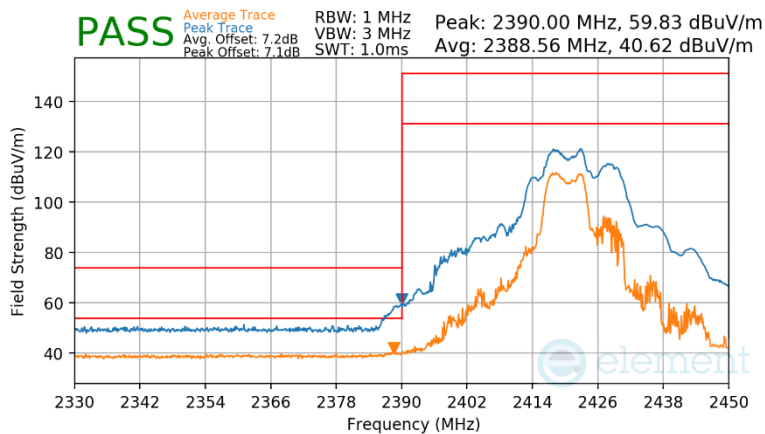

Plot 7-184 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU52+26)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 132 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 2422MHz
Channel: 3

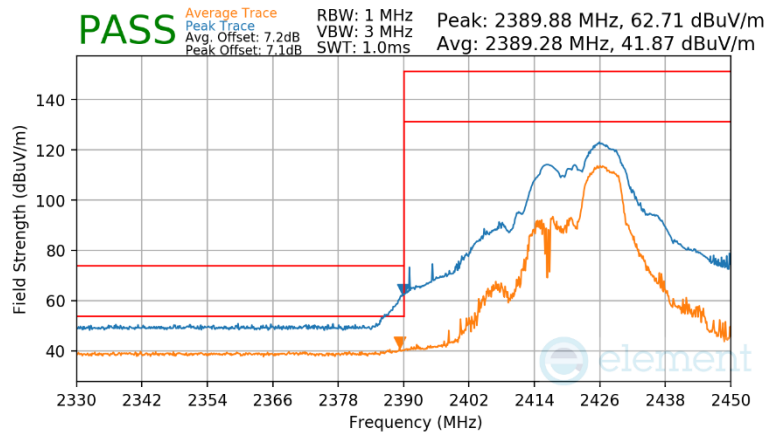

Plot 7-185 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU52+26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 70
Distance of Measurements: 3 Meters
Operating Frequency: 2452MHz
Channel: 9

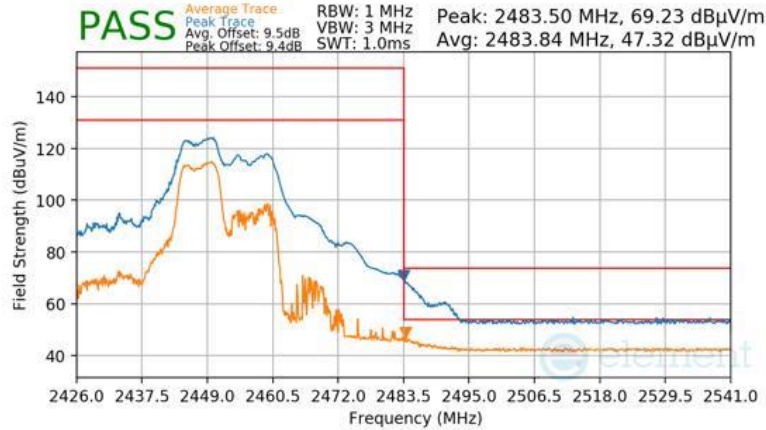

Plot 7-186 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU52+26)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 133 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 71
Distance of Measurements: 3 Meters
Operating Frequency: 2452MHz
Channel: 9

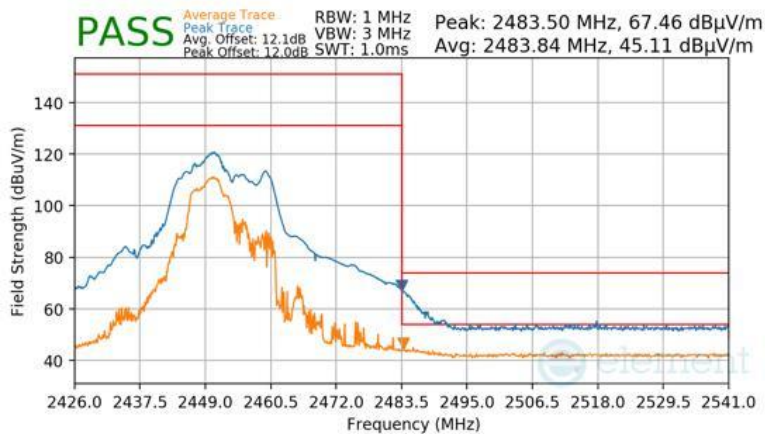

Plot 7-187 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU52+26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 2452MHz
Channel: 9

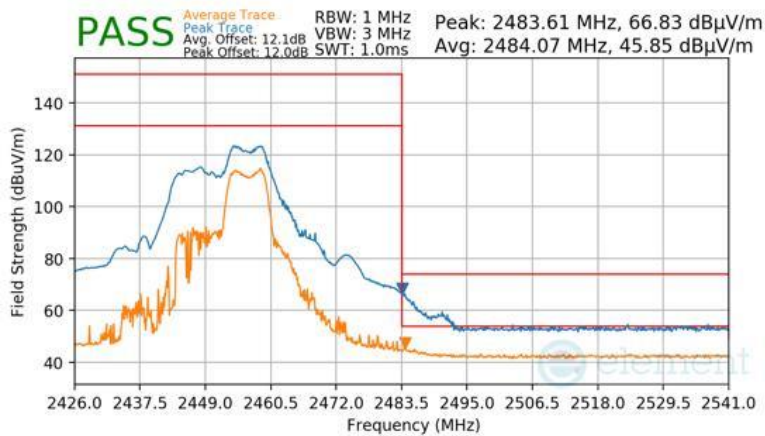

Plot 7-188 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU52+26)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 134 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 70
Distance of Measurements: 3 Meters
Operating Frequency: 2457MHz
Channel: 10

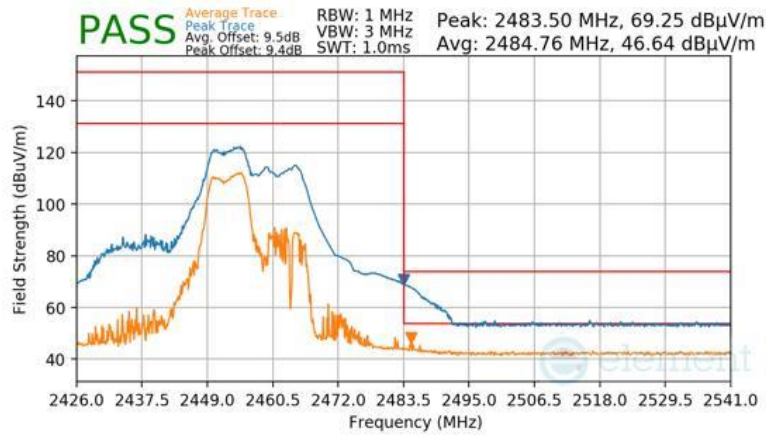

Plot 7-189 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU52+26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 71
Distance of Measurements: 3 Meters
Operating Frequency: 2457MHz
Channel: 10

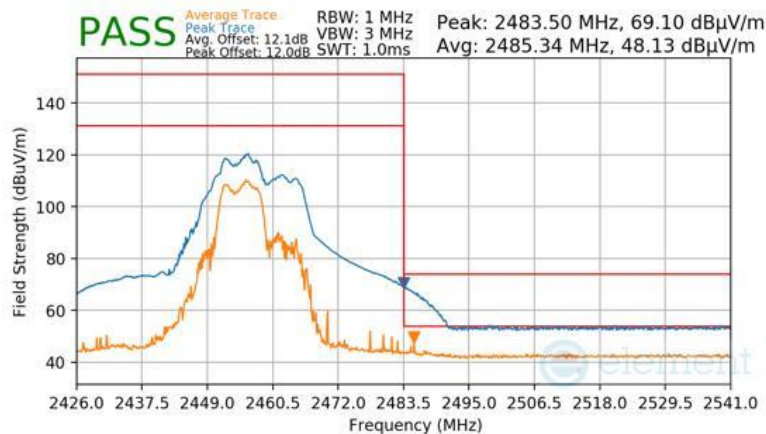

Plot 7-190 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU52+26)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 135 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 2457MHz
Channel: 10

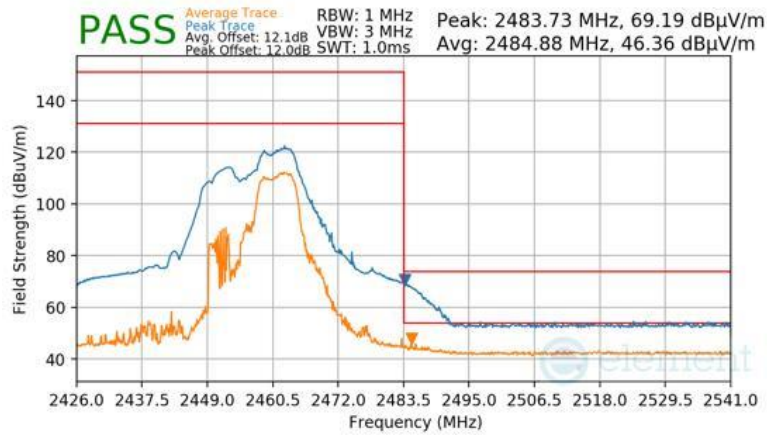

Plot 7-191 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU52+26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 70
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

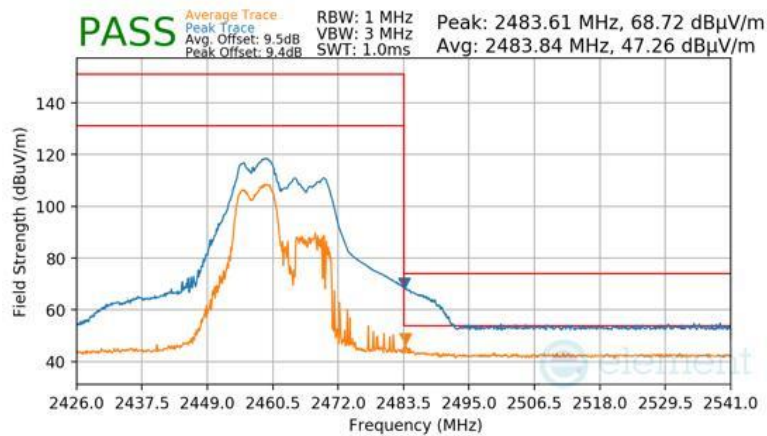

Plot 7-192 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU52+26)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 136 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 71
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

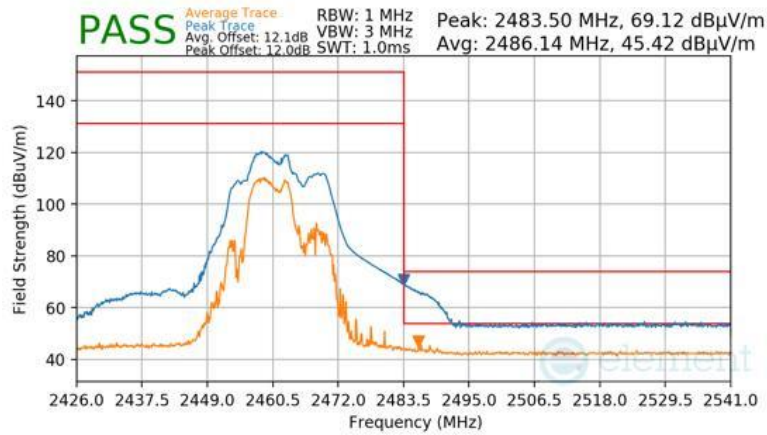

Plot 7-193 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU52+26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

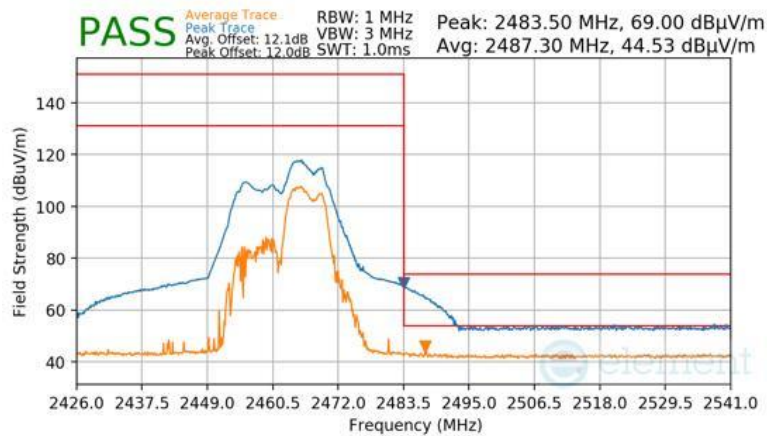

Plot 7-194 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU52+26)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 137 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 70
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

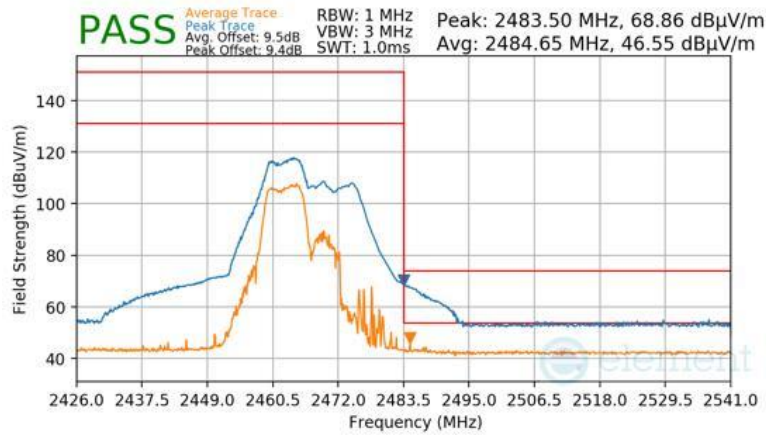

Plot 7-195 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU52+26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 71
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

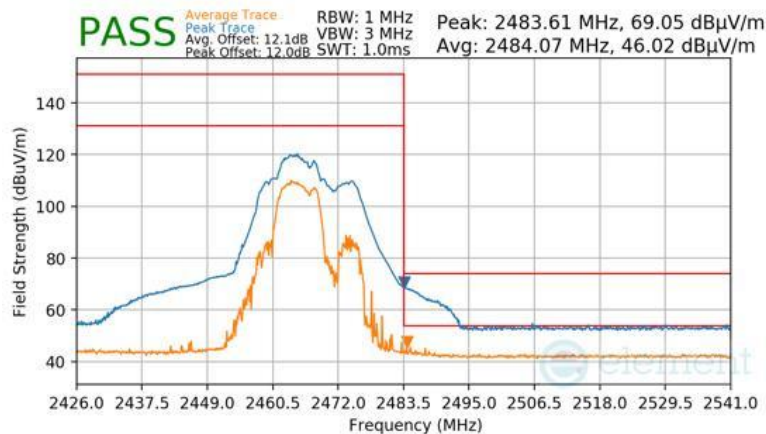

Plot 7-196 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU52+26)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 138 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

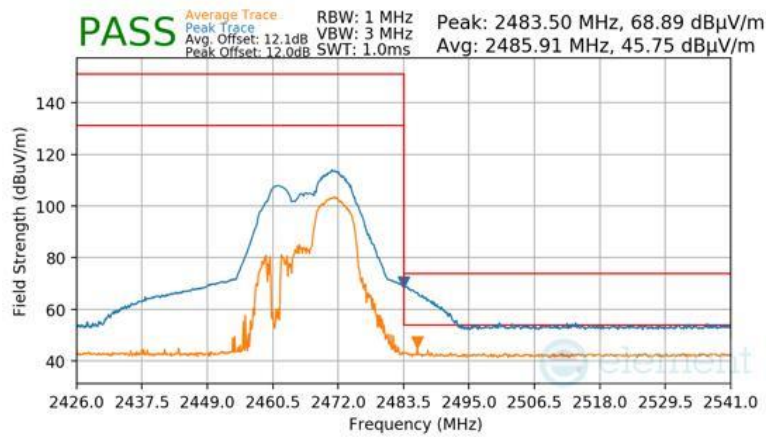

Plot 7-197 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU52+26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 70
Distance of Measurements: 3 Meters
Operating Frequency: 2472MHz
Channel: 13

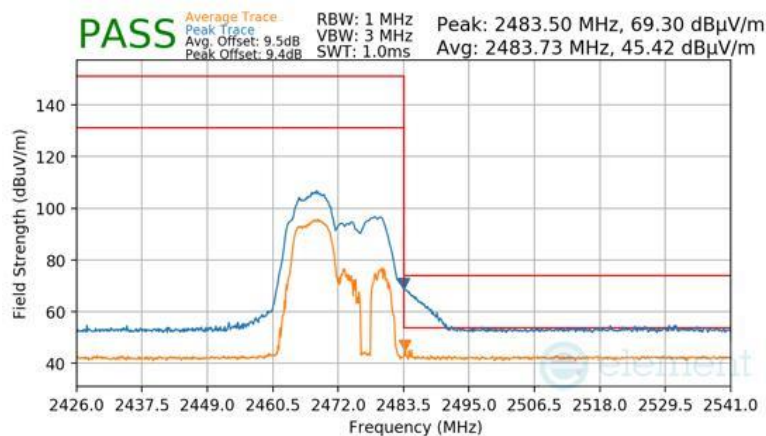

Plot 7-198 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU52+26)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 139 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 71
Distance of Measurements: 3 Meters
Operating Frequency: 2472MHz
Channel: 13

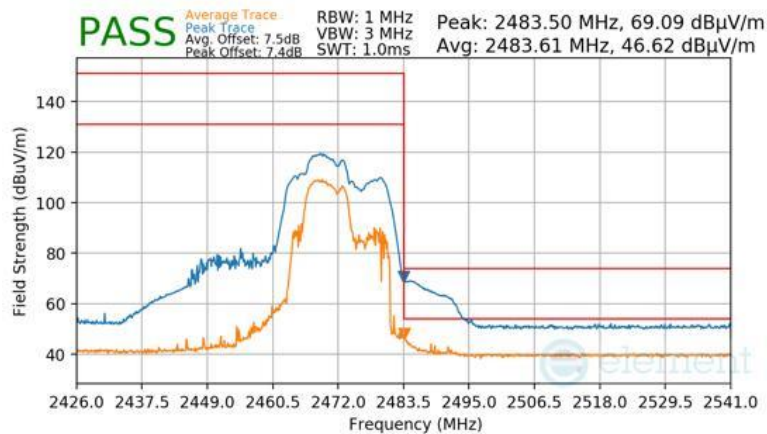

Plot 7-199 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU52+26)

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 2472MHz
Channel: 13

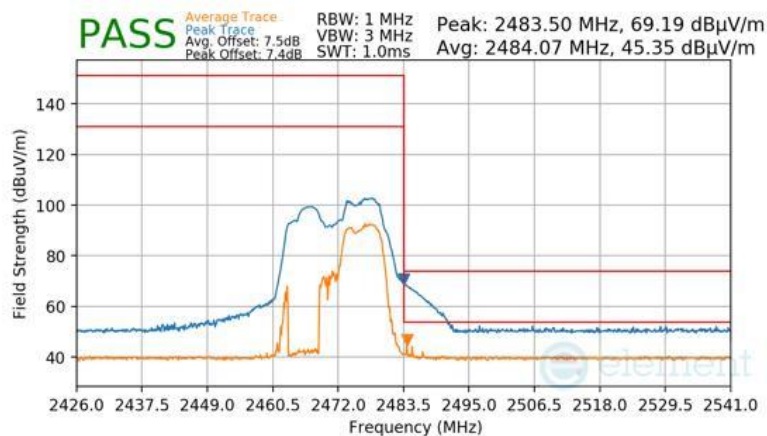


Plot 7-200 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU52+26)

FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 140 of 162


RU242

Mode:	802.11be OFDMA
Transfer Rate:	MCS9
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

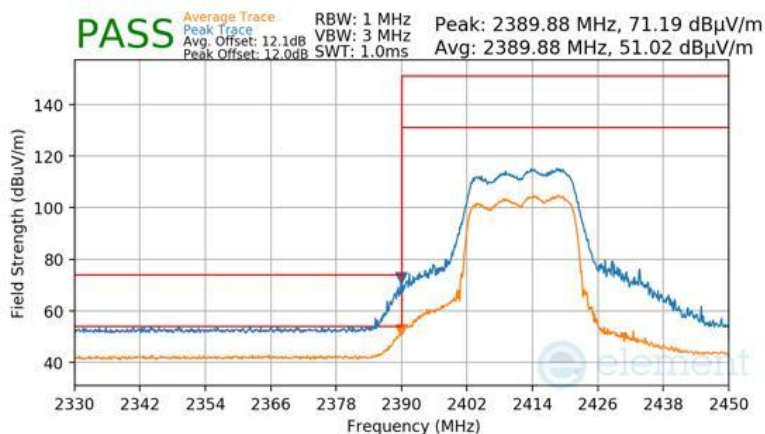

Plot 7-201 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU242)

Mode:	802.11be OFDMA
Transfer Rate:	MCS9
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	2417MHz
Channel:	2

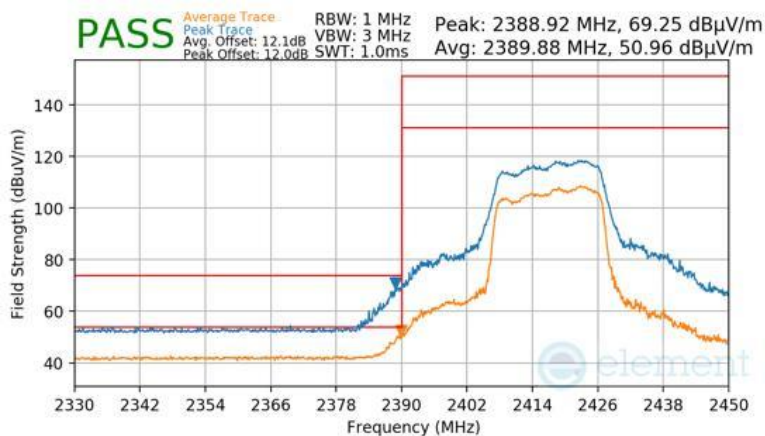


Plot 7-202 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU242)

FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 141 of 162


V 11.0 5/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2422MHz
Channel: 3

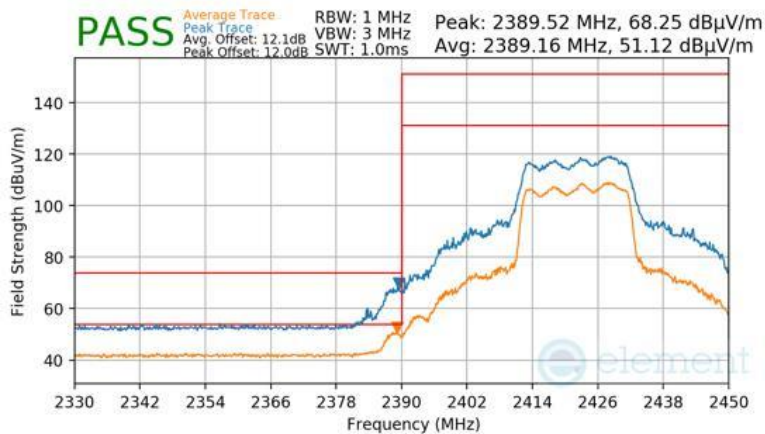

Plot 7-203 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2427MHz
Channel: 4

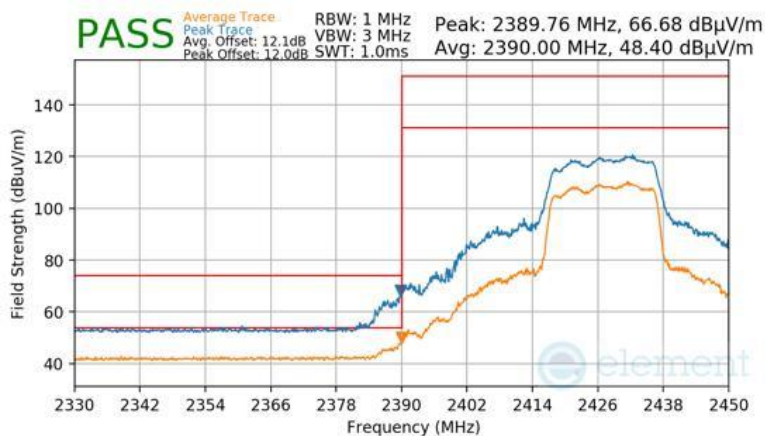

Plot 7-204 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU242)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 142 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2432MHz
Channel: 5

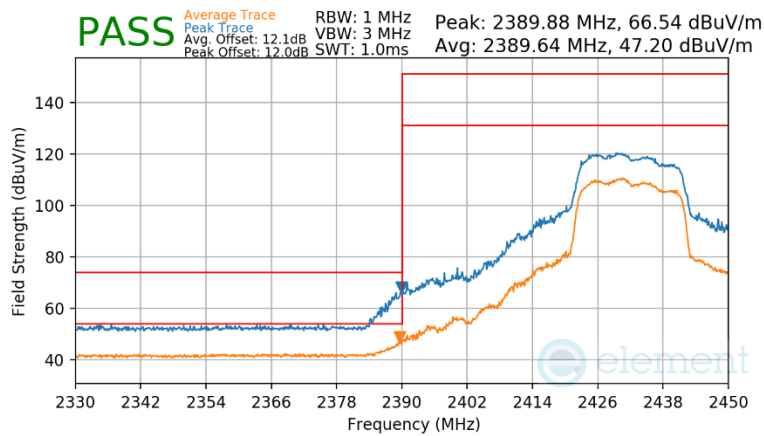

Plot 7-205 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 6

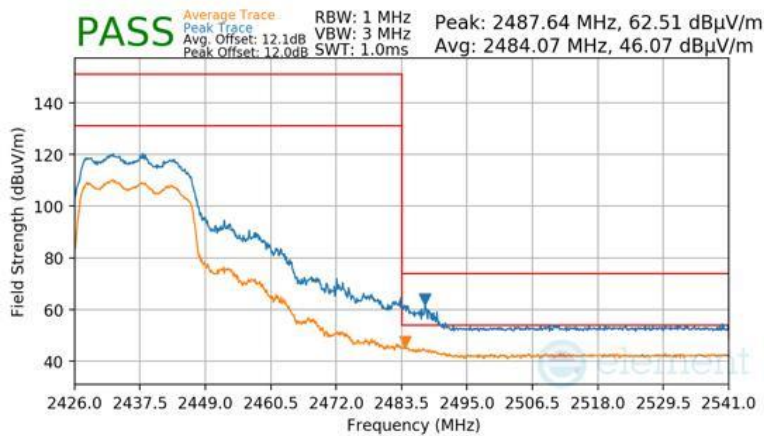

Plot 7-206 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)


FCC ID: BCGA3358 IC: 579C-A3358			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device		Page 143 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2442MHz
Channel: 7

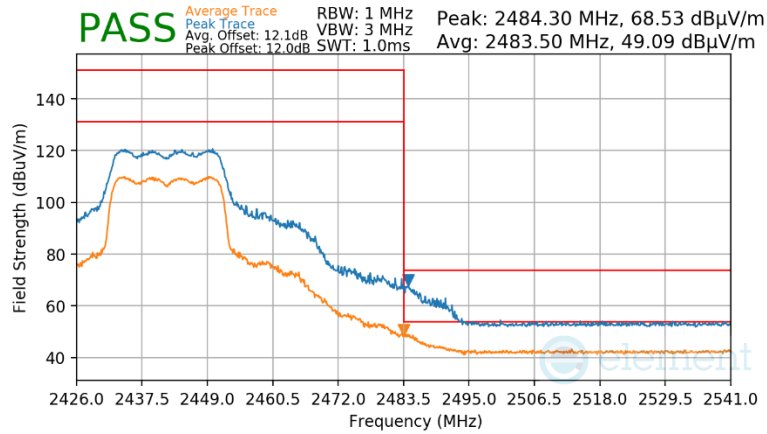

Plot 7-207 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2447MHz
Channel: 8

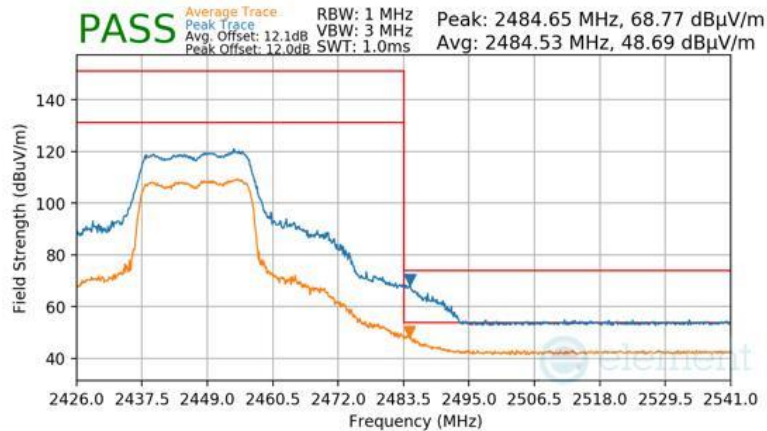

Plot 7-208 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 144 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2452MHz
Channel: 9

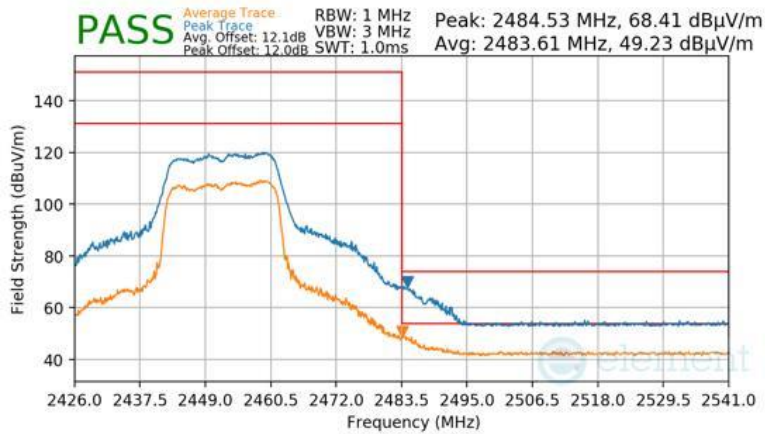

Plot 7-209 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2457MHz
Channel: 10

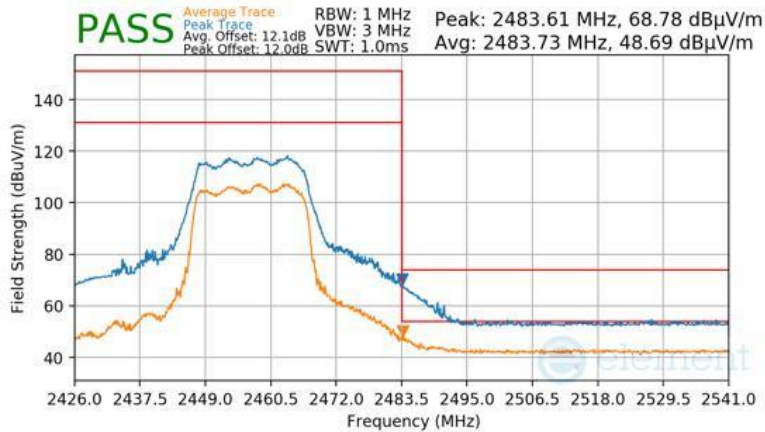

Plot 7-210 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 145 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

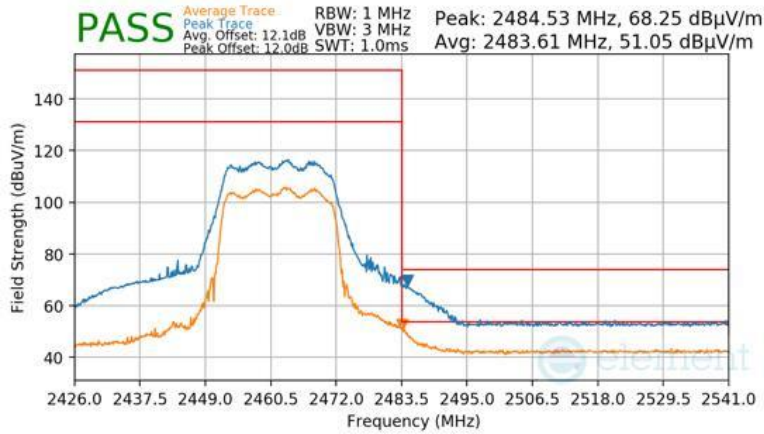

Plot 7-211 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

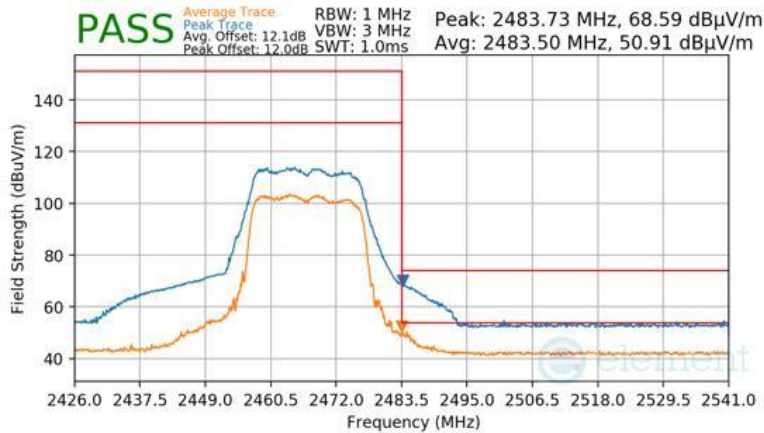

Plot 7-212 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)

FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 146 of 162

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2472MHz
Channel: 13

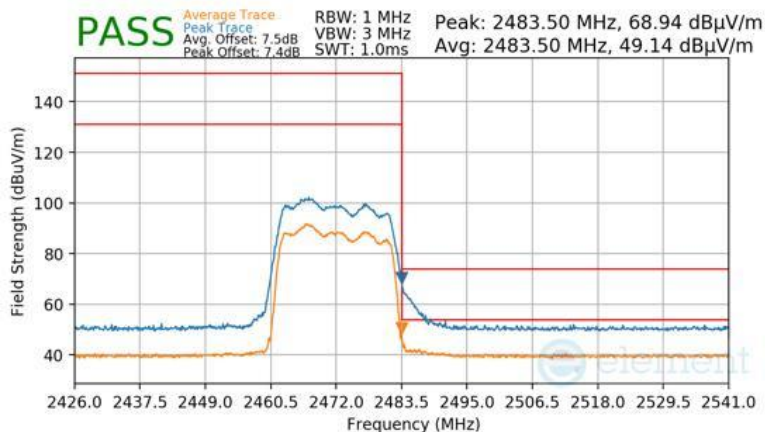

Plot 7-213 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)

FCC ID: BCGA3358 IC: 579C-A3358	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 147 of 162

V 11.0 5/2025

7.8 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-41 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-41. Radiated Limits

Test Procedures Used

ANSI C63.10-2020

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 148 of 162

V 11.0 5/2025

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

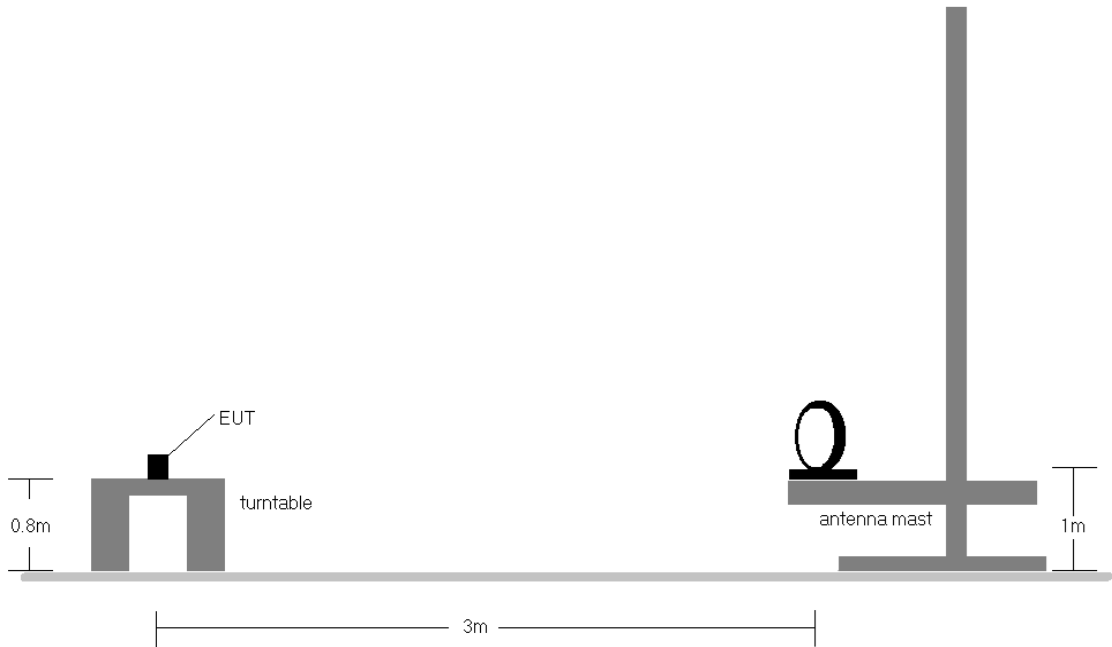


Figure 7-7. Radiated Test Setup < 30MHz

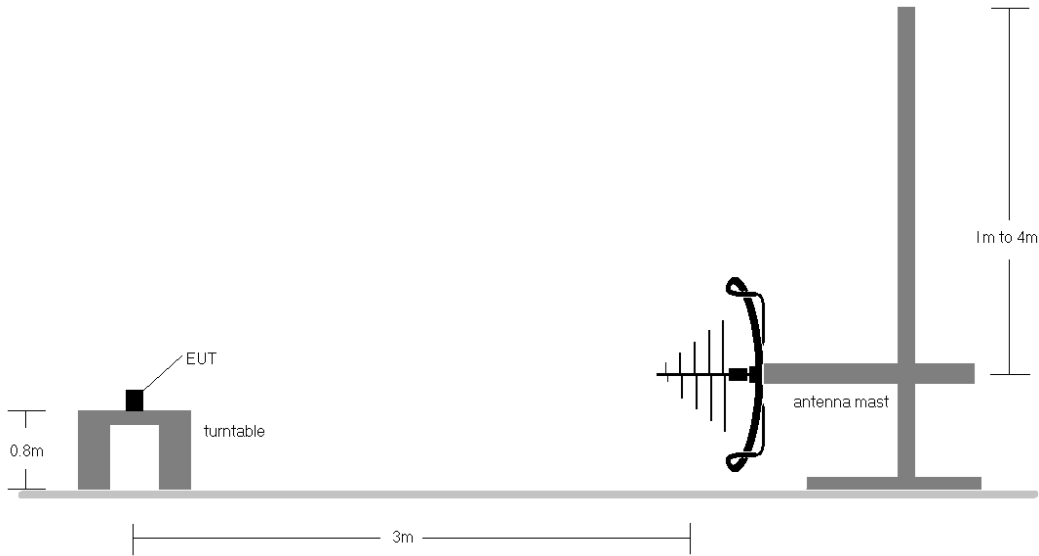


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 149 of 162

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-41.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All antenna configurations and data rates were investigated and only the worst case are reported.
10. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.
11. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger

Sample Calculations


Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamplifier Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

FCC ID: BCGA3358 IC: 579C-A3358	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 150 of 162

CDD Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

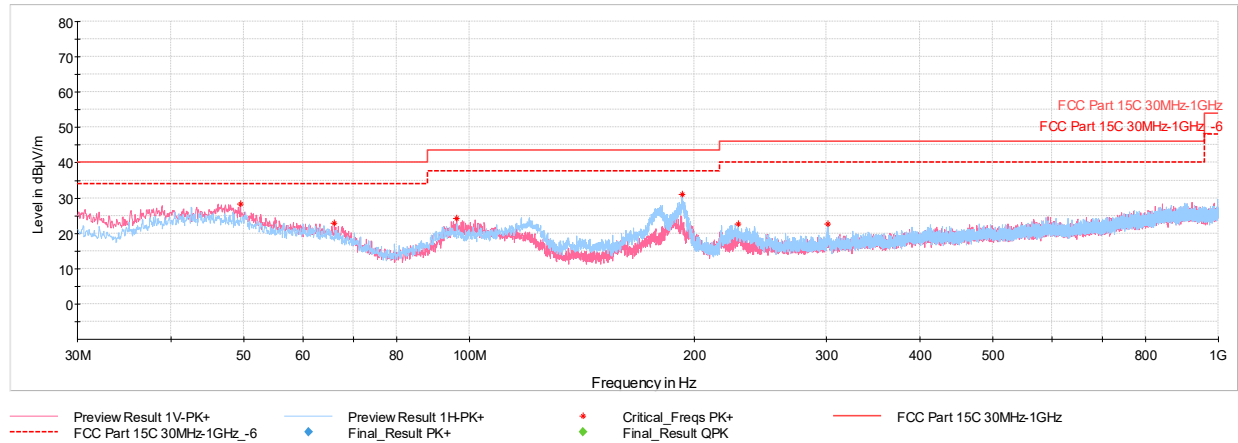


Plot 7-214. Radiated Spurious Emissions Below 1GHz CDD Ch.6 (RU26), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
49.50	Max Peak	V	100	14	-64.39	-14.29	28.32	40.00	-8.91
66.08	Max Peak	V	100	71	-66.44	-17.66	22.90	40.00	-21.08
96.20	Max Peak	V	100	164	-65.68	-17.10	24.22	43.52	-13.62
192.33	Max Peak	H	200	248	-59.80	-16.24	30.96	43.52	-18.77
228.41	Max Peak	H	100	85	-69.21	-15.21	22.58	46.02	-20.43
301.16	Max Peak	H	100	44	-71.13	-13.31	22.56	46.02	-16.82

Table 7-42. Radiated Spurious Emissions Below 1GHz CDD Ch.6 (RU26), with AC/DC Adapter


FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 151 of 162

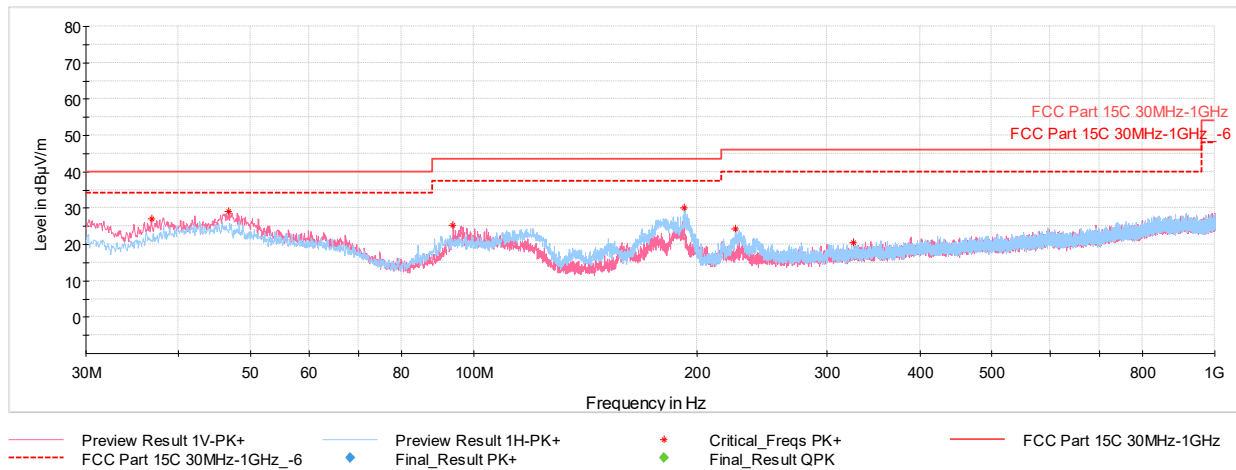

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
36.79	Max Peak	V	100	250	-63.12	-16.91	26.97	40.00	-13.03
46.68	Max Peak	V	300	143	-63.54	-14.40	29.06	40.00	-10.94
93.88	Max Peak	V	100	104	-64.13	-17.60	25.27	43.52	-18.25
192.62	Max Peak	H	200	258	-60.77	-16.20	30.03	43.52	-13.49
225.31	Max Peak	H	100	111	-67.24	-15.41	24.35	46.02	-21.67
325.46	Max Peak	H	100	293	-74.01	-12.48	20.51	46.02	-25.51

Table 7-43. Radiated Spurious Emissions Below 1GHz CDD Ch.6 (RU78), with AC/DC Adapter

FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 152 of 162

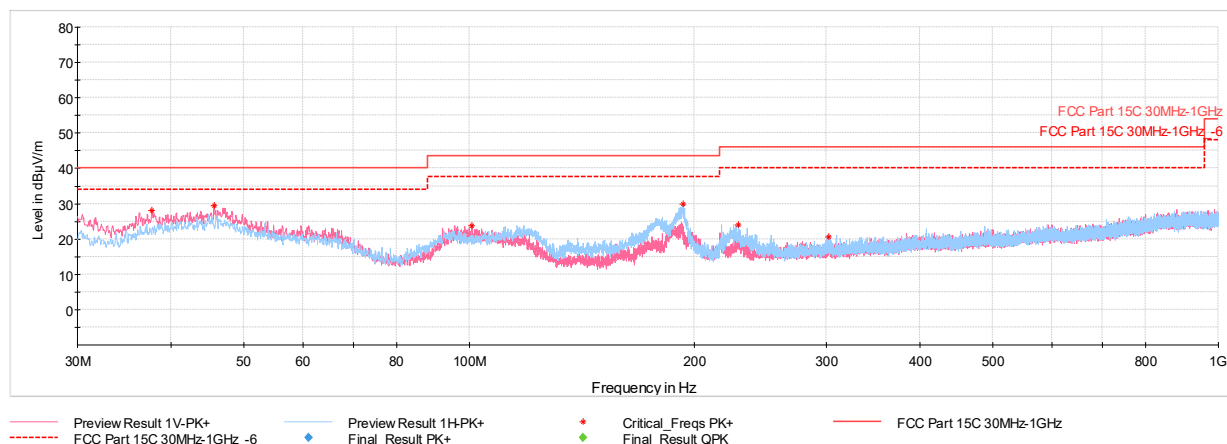

Plot 7-216. Radiated Spurious Emissions Below 1GHz CDD Ch.6 (RU242), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
37.71	Max Peak	V	100	262	-62.40	-16.56	28.04	40.00	-11.96
45.67	Max Peak	V	100	10	-63.10	-14.49	29.41	40.00	-10.59
100.91	Max Peak	V	100	147	-66.63	-16.50	23.87	43.52	-19.65
192.82	Max Peak	H	100	237	-60.87	-16.18	29.95	43.52	-13.57
228.66	Max Peak	H	100	86	-67.87	-15.21	23.92	46.02	-22.10
301.70	Max Peak	H	100	136	-73.03	-13.25	20.72	46.02	-25.30

Table 7-44. Radiated Spurious Emissions Below 1GHz CDD Ch.6 (RU242), with AC/DC Adapter

FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 153 of 162

7.9 AC Line-Conducted Emissions Measurement

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-45. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 154 of 162

V 11.0 5/2025

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

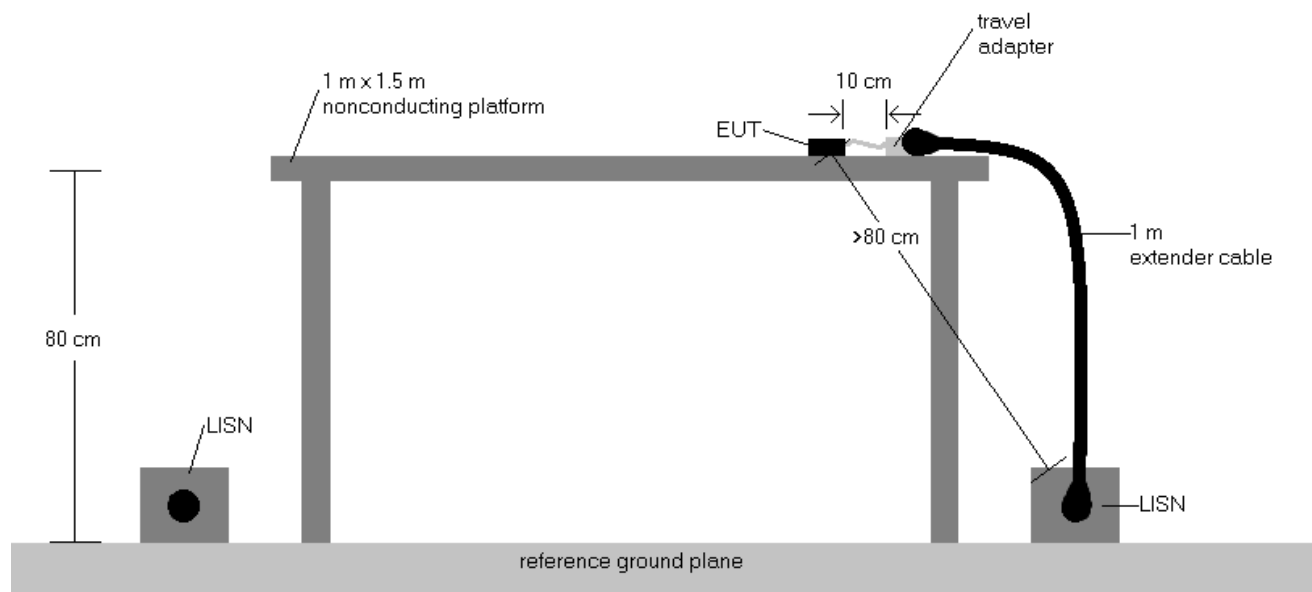



Figure 7-9. Test Instrument & Measurement Setup

Test Notes

- All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
- Both configurations below were investigated, and the worst case has been reported.
 - EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - EUT powered by host PC via USB-C cable with wire charger
- The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
- $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
- $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
- $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
- Traces shown in plot are made using quasi peak and average detectors.
- Deviations to the Specifications: None.
- All RU's were investigated and only worst case partially-loaded and fully-loaded RU's are reported.

FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 155 of 162

V 11.0 5/2025

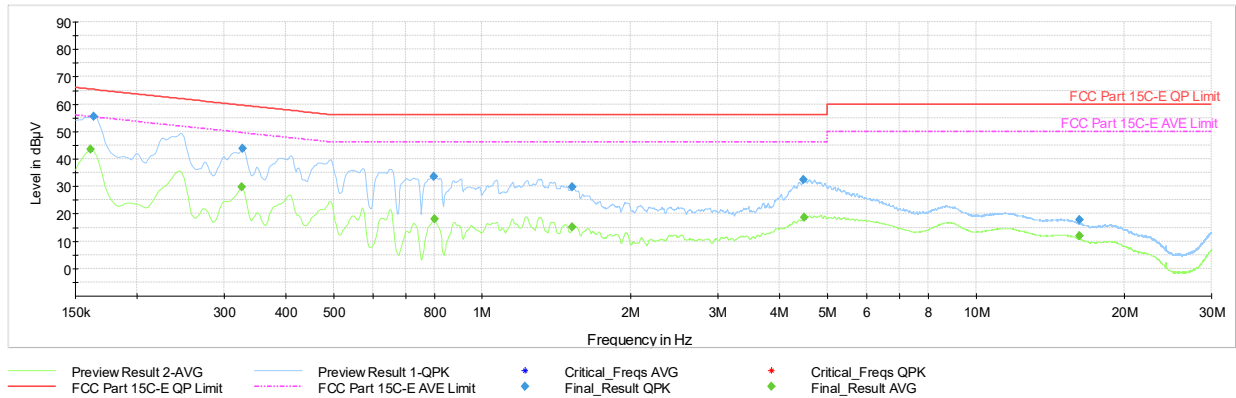


Plot 7-217. AC Line Conducted Emissions with 802.11be CDD (RU26) Ch.6 (L1, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.161	FINAL	—	42.02	55.40	-13.38	L1	ON
0.161	FINAL	53.7	—	65.40	-11.70	L1	ON
0.326	FINAL	—	28.76	49.57	-20.80	L1	ON
0.328	FINAL	42.3	—	59.51	-17.25	L1	ON
0.798	FINAL	31.2	—	56.00	-24.80	L1	ON
0.800	FINAL	—	17.24	46.00	-28.76	L1	ON
1.444	FINAL	29.0	—	56.00	-26.98	L1	ON
1.448	FINAL	—	14.17	46.00	-31.83	L1	ON
4.484	FINAL	—	15.95	46.00	-30.05	L1	ON
4.490	FINAL	31.4	—	56.00	-24.58	L1	ON
24.311	FINAL	—	4.28	50.00	-45.72	L1	ON
24.311	FINAL	10.6	—	60.00	-49.40	L1	ON

Table 7-46. AC Line Conducted Data with 802.11be CDD (RU26) Ch.6 (L1, with AC/DC Adapter)

FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 156 of 162

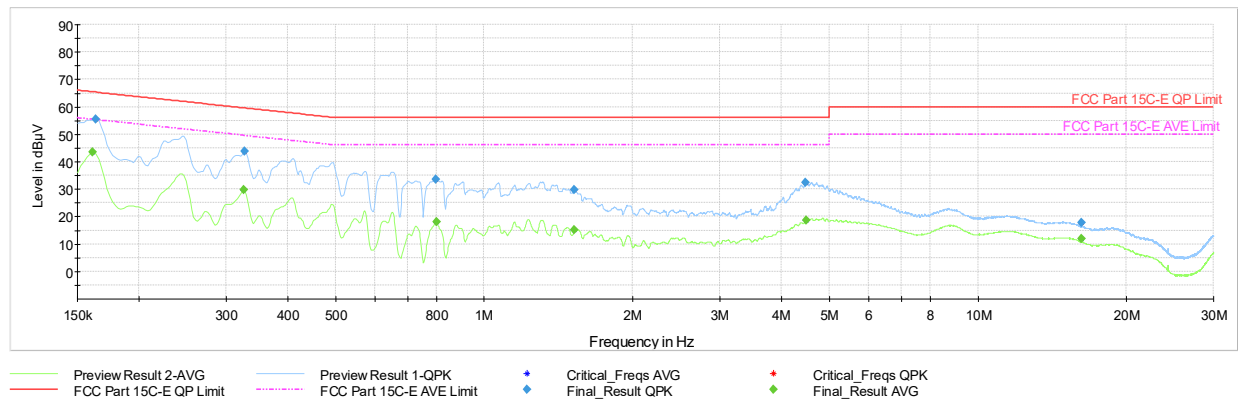


Plot 7-218. AC Line Conducted Emissions with 802.11be CDD (RU26) Ch.6 (N, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.161	FINAL	—	43.64	55.40	-11.76	N	ON
0.164	FINAL	55.4	—	65.28	-9.90	N	ON
0.326	FINAL	—	29.69	49.57	-19.87	N	ON
0.328	FINAL	43.7	—	59.51	-15.83	N	ON
0.798	FINAL	33.5	—	56.00	-22.52	N	ON
0.800	FINAL	—	18.13	46.00	-27.87	N	ON
1.523	FINAL	29.7	—	56.00	-26.28	N	ON
1.523	FINAL	—	15.03	46.00	-30.97	N	ON
4.477	FINAL	32.4	—	56.00	-23.56	N	ON
4.484	FINAL	—	18.77	46.00	-27.23	N	ON
16.190	FINAL	—	11.98	50.00	-38.02	N	ON
16.190	FINAL	17.7	—	60.00	-42.30	N	ON

Table 7-47. AC Line Conducted Data with 802.11be CDD (RU26) Ch.6 (N, with AC/DC Adapter)

FCC ID: BCGA3358 IC: 579C-A3358			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device		Page 157 of 162

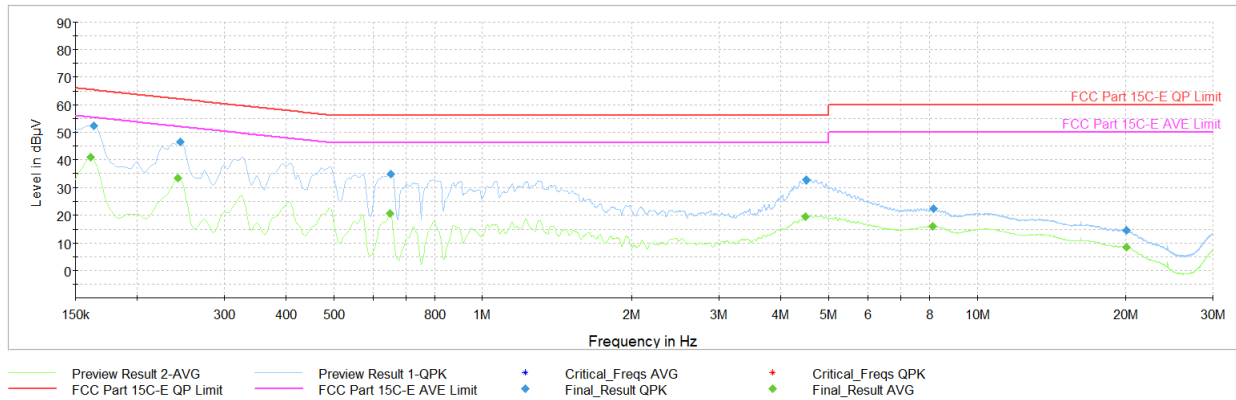


Plot 7-219. AC Line Conducted Emissions with 802.11be CDD (RU78) Ch.6 (L1, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.161	FINAL	—	42.07	55.40	-13.32	L1	ON
0.164	FINAL	53.7	—	65.28	-11.63	L1	ON
0.247	FINAL	—	33.42	51.87	-18.45	L1	ON
0.247	FINAL	47.9	—	61.87	-13.99	L1	ON
0.650	FINAL	—	20.58	46.00	-25.42	L1	ON
0.650	FINAL	34.1	—	56.00	-21.87	L1	ON
4.477	FINAL	31.2	—	56.00	-24.78	L1	ON
4.479	FINAL	—	15.66	46.00	-30.34	L1	ON
8.597	FINAL	13.6	—	60.00	-46.44	L1	ON
8.599	FINAL	—	6.76	50.00	-43.24	L1	ON
16.193	FINAL	—	11.42	50.00	-38.58	L1	ON
16.193	FINAL	15.8	—	60.00	-44.18	L1	ON

Table 7-48. AC Line Conducted Data with 802.11be CDD (RU78) Ch.6 (L1, with AC/DC Adapter)

FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 158 of 162

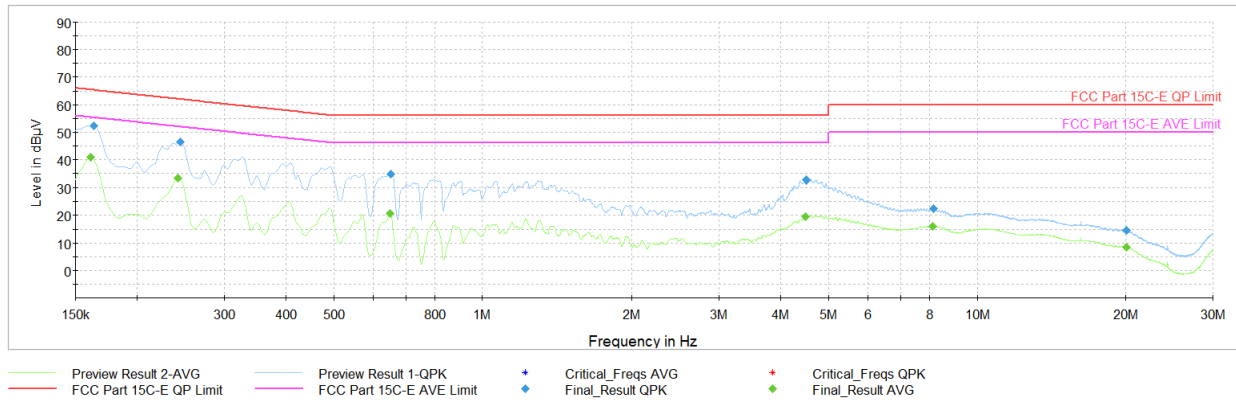


Plot 7-220. AC Line Conducted Emissions with 802.11be CDD (RU78) Ch.6 (N, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.161	FINAL	—	40.87	55.40	-14.53	N	ON
0.164	FINAL	52.2	—	65.28	-13.05	N	ON
0.242	FINAL	—	33.21	52.02	-18.81	N	ON
0.245	FINAL	46.4	—	61.94	-15.54	N	ON
0.650	FINAL	—	20.60	46.00	-25.40	N	ON
0.652	FINAL	34.8	—	56.00	-21.16	N	ON
4.497	FINAL	—	19.43	46.00	-26.57	N	ON
4.499	FINAL	32.6	—	56.00	-23.37	N	ON
8.135	FINAL	—	16.04	50.00	-33.96	N	ON
8.144	FINAL	22.3	—	60.00	-37.68	N	ON
20.018	FINAL	14.5	—	60.00	-45.55	N	ON
20.031	FINAL	—	8.33	50.00	-41.67	N	ON

Table 7-49. AC Line Conducted Data with 802.11be CDD (RU78) Ch.6 (N, with AC/DC Adapter)

FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 159 of 162

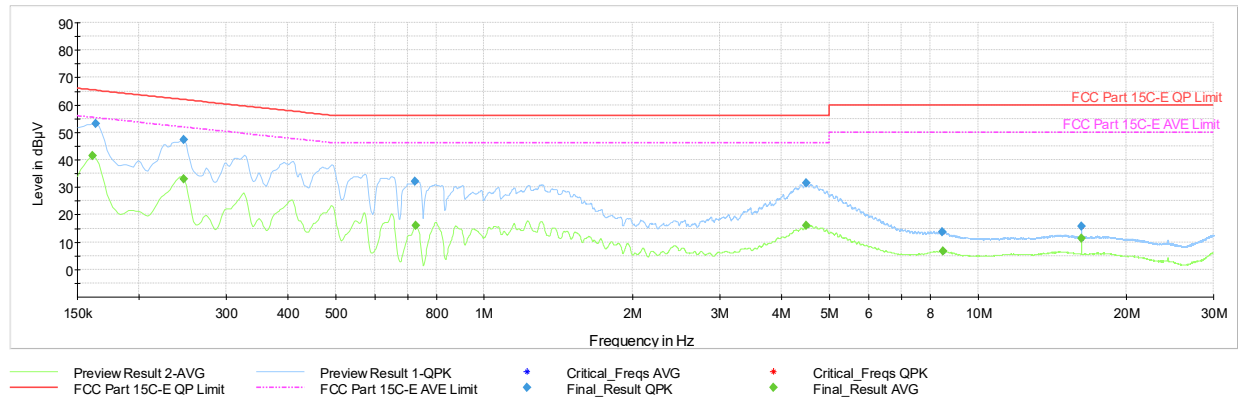


Plot 7-221. AC Line Conducted Emissions with 802.11be CDD (RU242) Ch.6 (L1, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.161	FINAL	—	41.41	55.40	-13.99	L1	ON
0.164	FINAL	53.0	—	65.28	-12.26	L1	ON
0.247	FINAL	—	32.98	51.87	-18.89	L1	ON
0.247	FINAL	47.3	—	61.87	-14.60	L1	ON
0.724	FINAL	32.2	—	56.00	-23.80	L1	ON
0.726	FINAL	—	16.07	46.00	-29.93	L1	ON
4.484	FINAL	—	15.89	46.00	-30.11	L1	ON
4.488	FINAL	31.5	—	56.00	-24.55	L1	ON
8.475	FINAL	13.7	—	60.00	-46.32	L1	ON
8.491	FINAL	—	6.78	50.00	-43.22	L1	ON
16.188	FINAL	15.8	—	60.00	-44.19	L1	ON
16.190	FINAL	—	11.24	50.00	-38.76	L1	ON

Table 7-50. AC Line Conducted Data with 802.11be CDD (RU242) Ch.6 (L1, with AC/DC Adapter)

FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 160 of 162

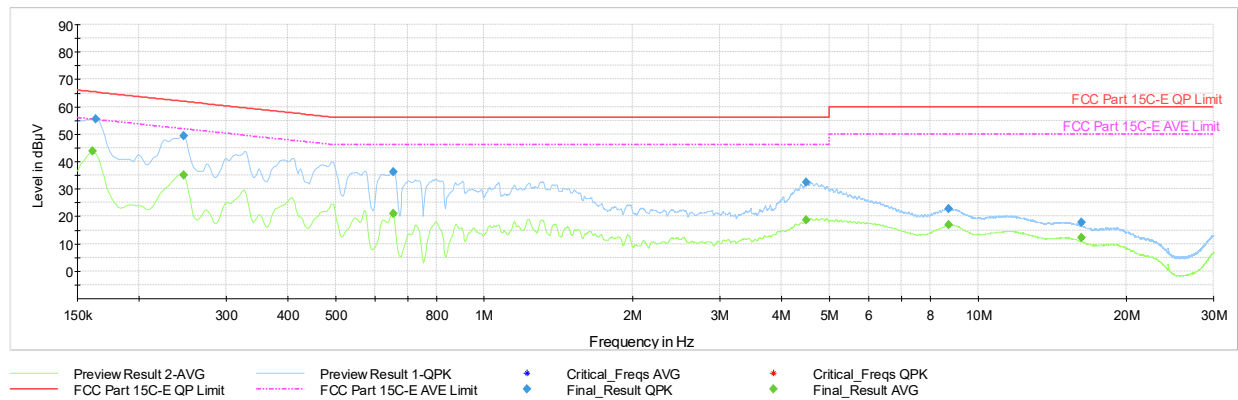

Plot 7-222. AC Line Conducted Emissions with 802.11be CDD (RU242) Ch.6 (N, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.161	FINAL	—	43.72	55.40	-11.68	N	ON
0.164	FINAL	55.6	—	65.28	-9.72	N	ON
0.247	FINAL	—	34.95	51.87	-16.91	N	ON
0.247	FINAL	49.5	—	61.87	-12.36	N	ON
0.654	FINAL	36.2	—	56.00	-19.83	N	ON
0.654	FINAL	—	21.04	46.00	-24.96	N	ON
4.488	FINAL	—	18.74	46.00	-27.26	N	ON
4.490	FINAL	32.4	—	56.00	-23.63	N	ON
8.723	FINAL	—	16.86	50.00	-33.14	N	ON
8.725	FINAL	22.8	—	60.00	-37.19	N	ON
16.197	FINAL	—	12.12	50.00	-37.88	N	ON
16.197	FINAL	17.7	—	60.00	-42.29	N	ON

Table 7-51. AC Line Conducted Data with 802.11be CDD (RU242) Ch.6 (N, with AC/DC Adapter)

FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 161 of 162

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3358, IC: 579C-A3358** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3358 IC: 579C-A3358		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170039-15.BCG	Test Dates: 05/12/2025 - 07/19/2025	EUT Type: Tablet Device	Page 162 of 162

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.