



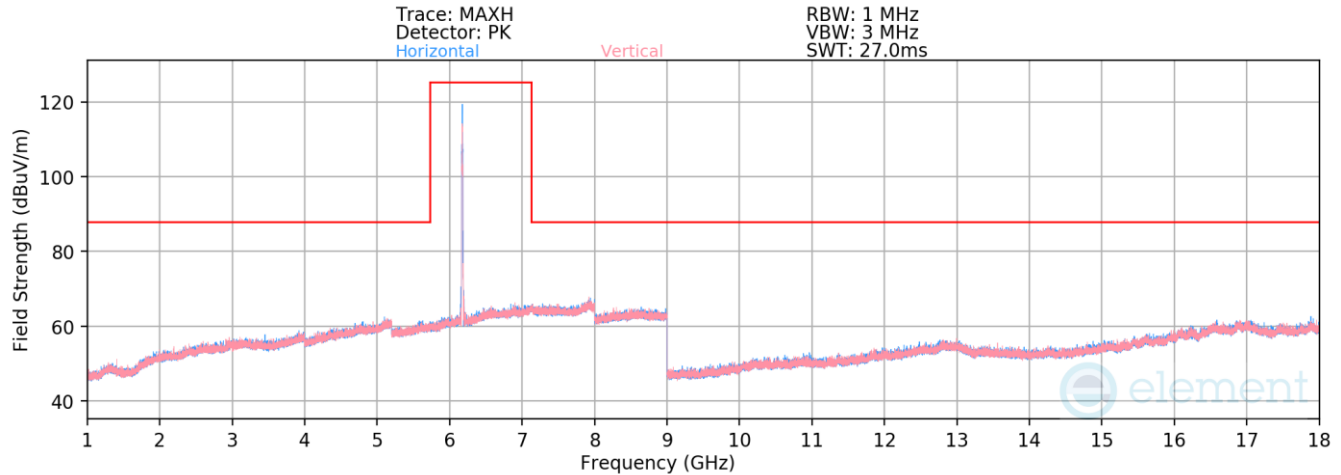

Plot 7-1344. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 45 – RU26)

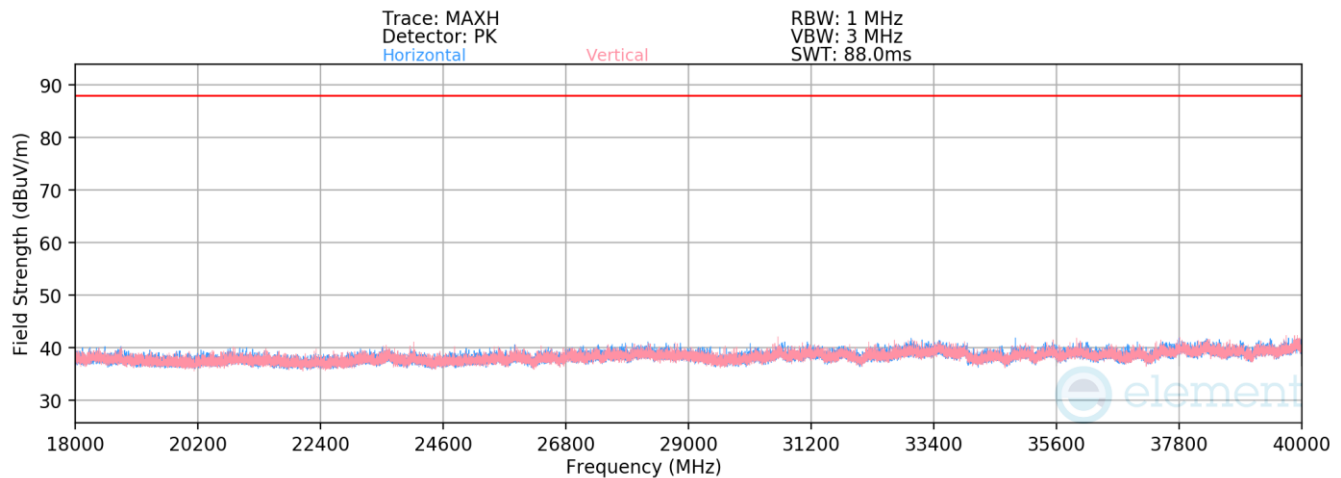


Plot 7-1345. Radiated Spurious Emissions 18-40GHz CDD Primary (802.11be – Ch. 45 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6175MHz
Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12350.00	Average	H	-	-	-85.31	20.88	42.58	53.98	-11.40
* 12350.00	Peak	H	-	-	-74.30	20.88	53.59	73.98	-20.39

Table 7-205. Radiated Spurious Emission Measurements CDD Primary – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device		Page 410 of 635

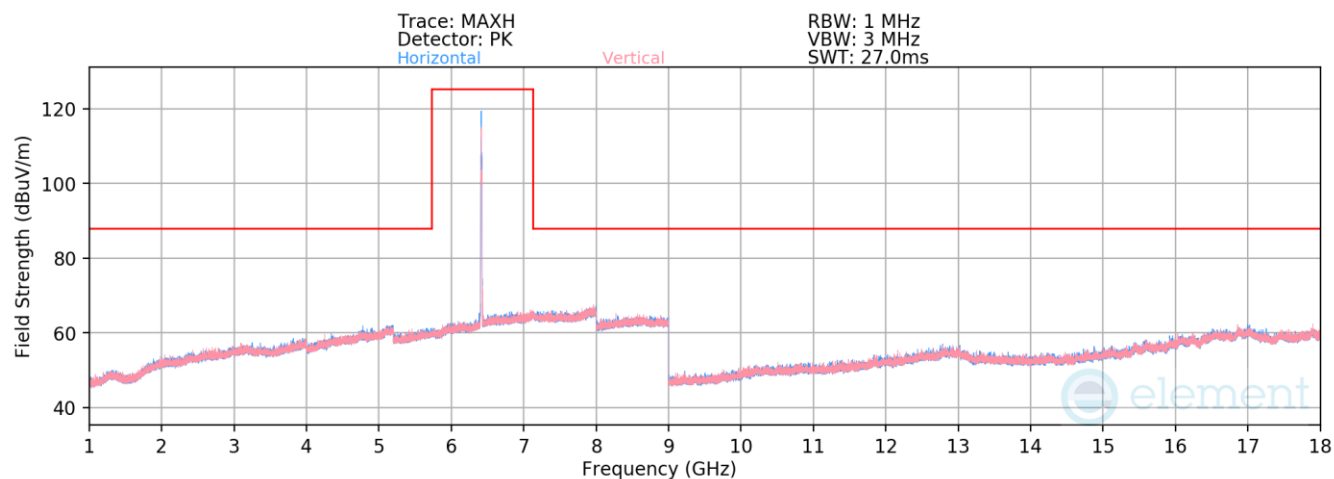

Plot 7-1346. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 93 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415MHz
Channel: 93


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Average	H	-	-	-85.42	22.11	43.68	68.23	-24.55
12830.00	Peak	H	-	-	-73.67	22.11	55.44	88.23	-32.79

Table 7-206. Radiated Spurious Emission Measurements CDD Primary – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device		Page 411 of 635

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

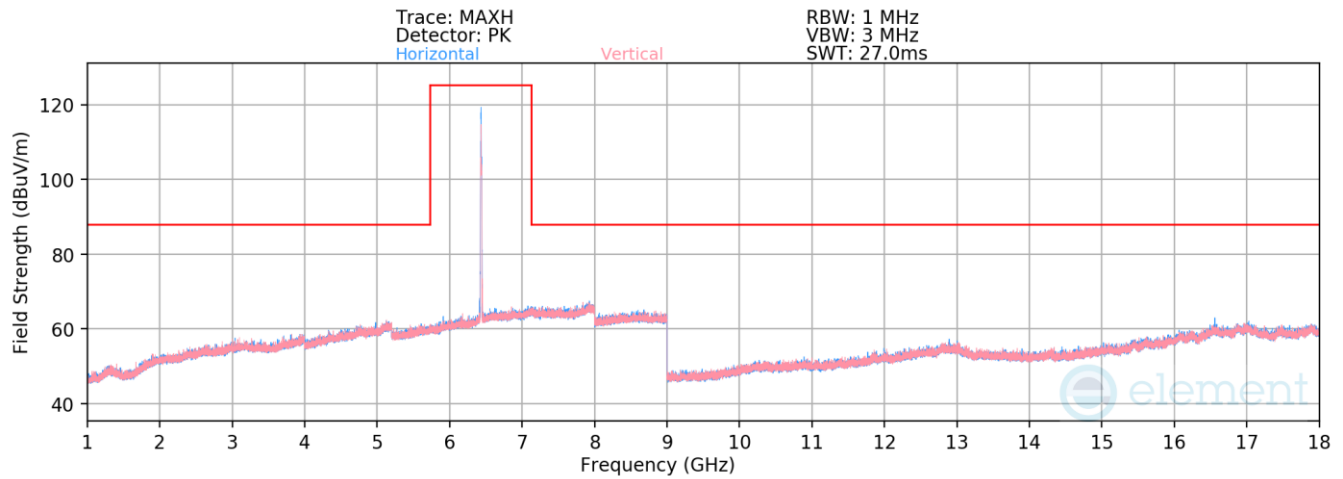

Plot 7-1347. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 97 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435MHz
Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12870.00	Average	H	-	-	-85.18	22.02	43.84	68.23	-24.39
12870.00	Peak	H	-	-	-73.53	22.02	55.49	88.23	-32.74


Table 7-207. Radiated Spurious Emission Measurements CDD Primary – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 412 of 635

V 11.0 05/2025

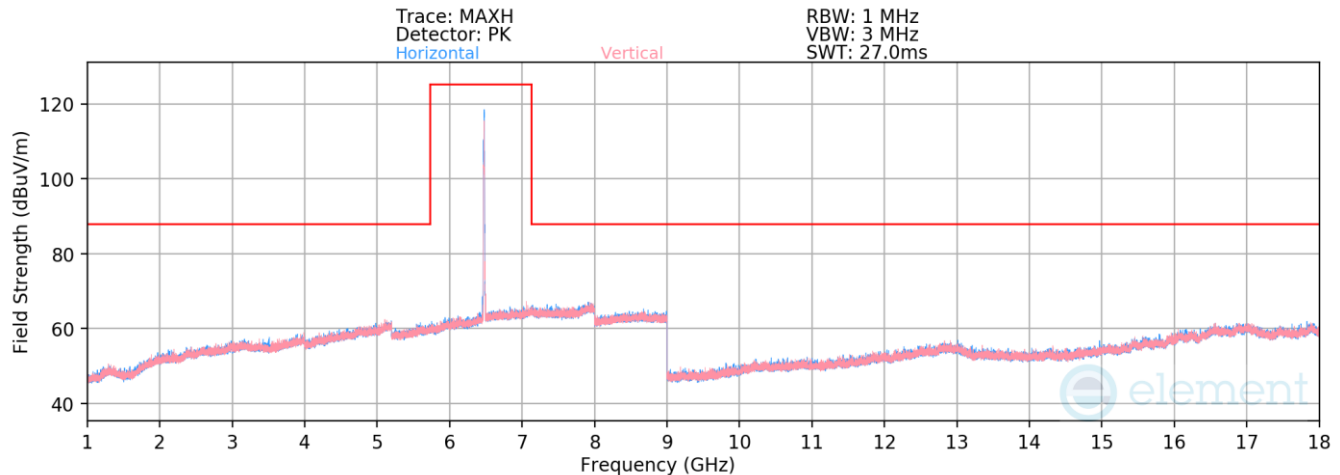

Plot 7-1348. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 105 – RU26)

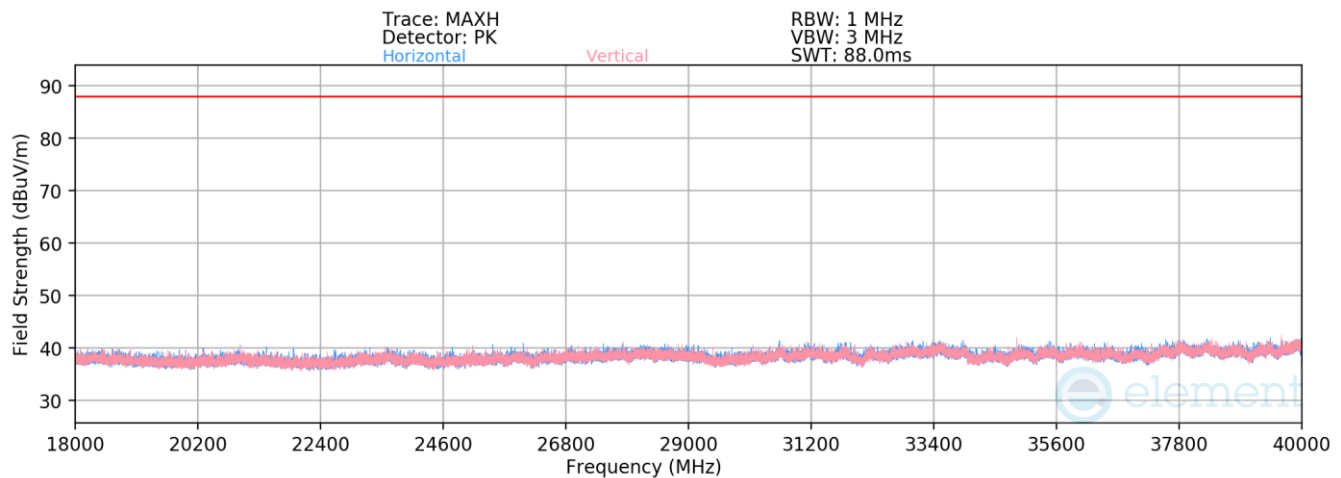

Plot 7-1349. Radiated Spurious Emissions 18-40GHz CDD Primary (802.11be – Ch. 105 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6475MHz
Channel: 105


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12950.00	Average	H	-	-	-85.22	21.88	43.66	68.23	-24.57
12950.00	Peak	H	-	-	-74.07	21.88	54.81	88.23	-33.42

Table 7-208. Radiated Spurious Emission Measurements CDD Primary – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device		Page 413 of 635

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

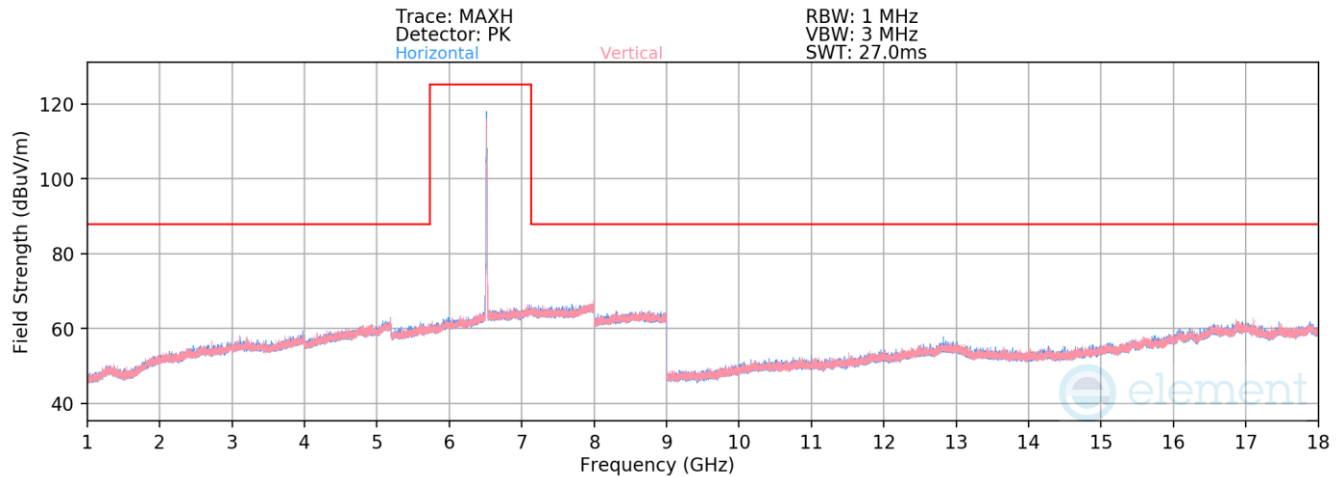

Plot 7-1350. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 113 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6515MHz
Channel: 113


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13030.00	Average	H	-	-	-85.54	22.11	43.57	68.23	-24.66
13030.00	Peak	H	-	-	-73.97	22.11	55.14	88.23	-33.09

Table 7-209. Radiated Spurious Emission Measurements CDD Primary – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 414 of 635

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

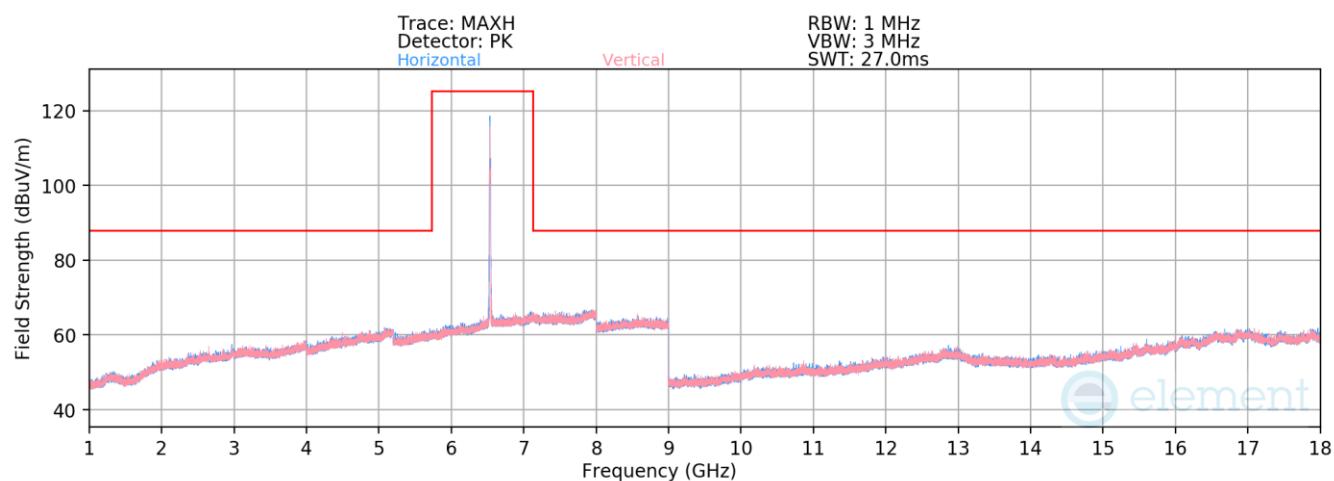

Plot 7-1351. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 117 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535MHz
Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13070.00	Average	H	-	-	-85.41	22.11	43.71	68.23	-24.52
13070.00	Peak	H	-	-	-73.09	22.11	56.02	88.23	-32.21


Table 7-210. Radiated Spurious Emission Measurements CDD Primary – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 415 of 635

V 11.0 05/2025

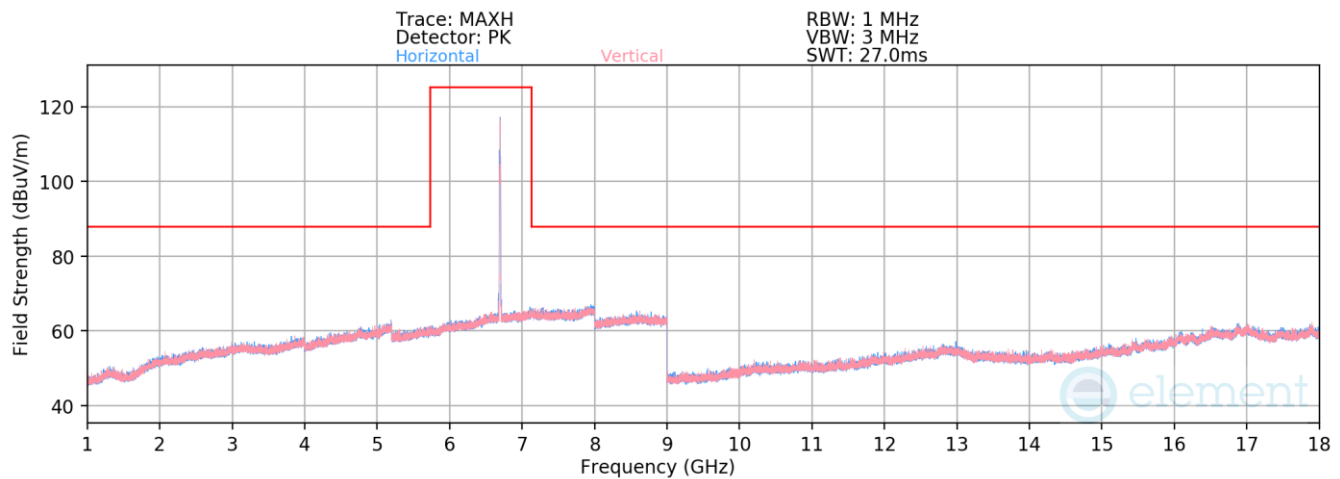

Plot 7-1352. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 149 – RU26)

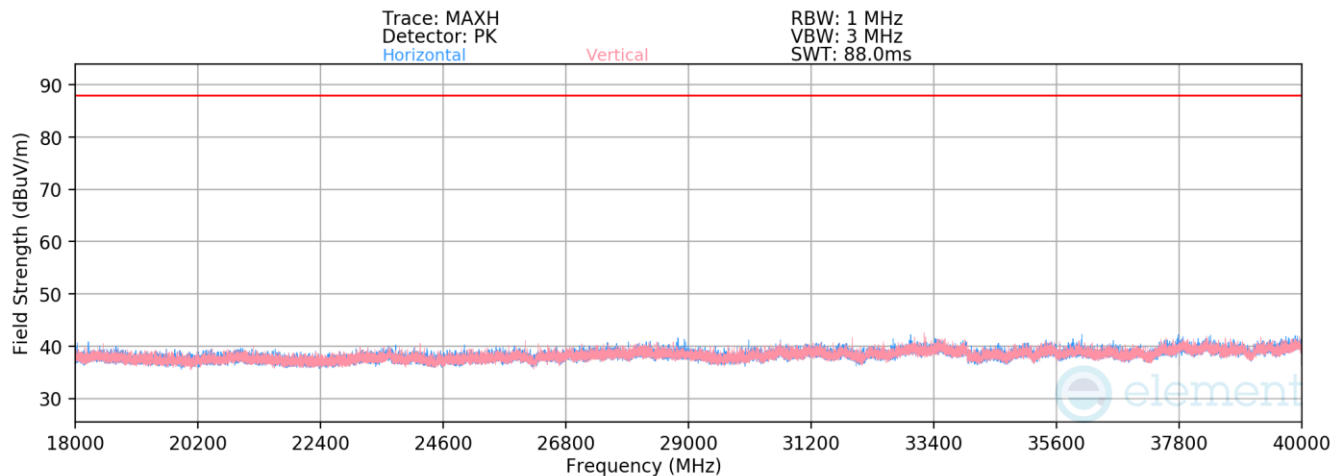

Plot 7-1353. Radiated Spurious Emissions 18-40GHz CDD Primary (802.11be – Ch. 149 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6695MHz
Channel: 149


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13390.00	Average	H	-	-	-85.46	22.01	43.55	68.23	-24.68
* 13390.00	Peak	H	-	-	-73.66	22.01	55.35	73.98	-18.63

Table 7-211. Radiated Spurious Emission Measurements CDD Primary – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device		Page 416 of 635

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

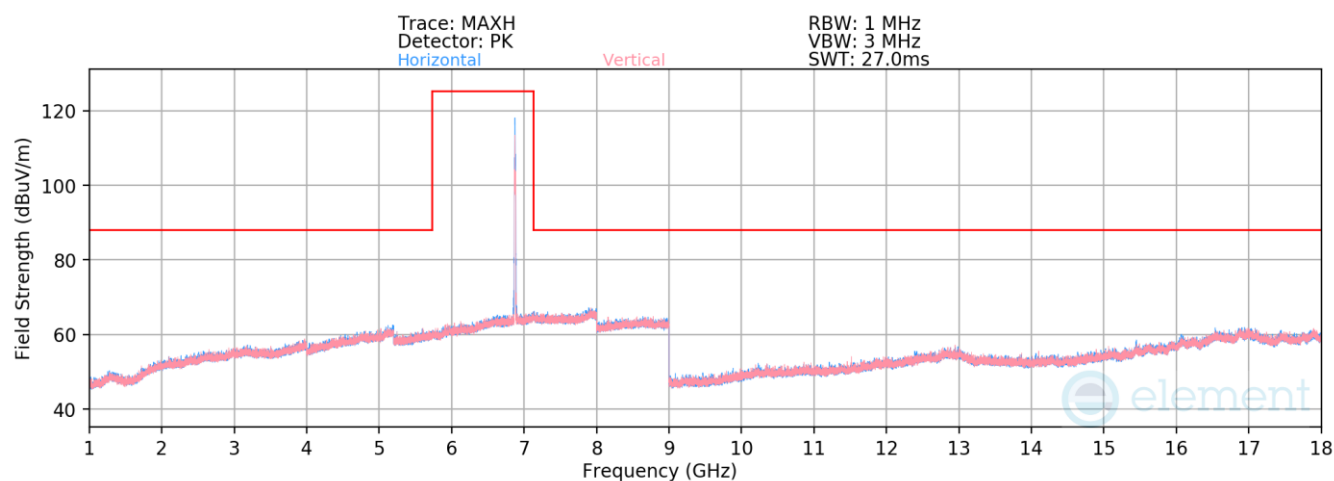

Plot 7-1354. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 185 – RU26)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6875MHz
Channel:	185


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13750.00	Average	H	-	-	-85.89	21.88	43.00	68.23	-25.23
13750.00	Peak	H	-	-	-74.45	21.88	54.44	88.23	-33.79

Table 7-212. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA3361 IC: 579C-A3361	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 417 of 635

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

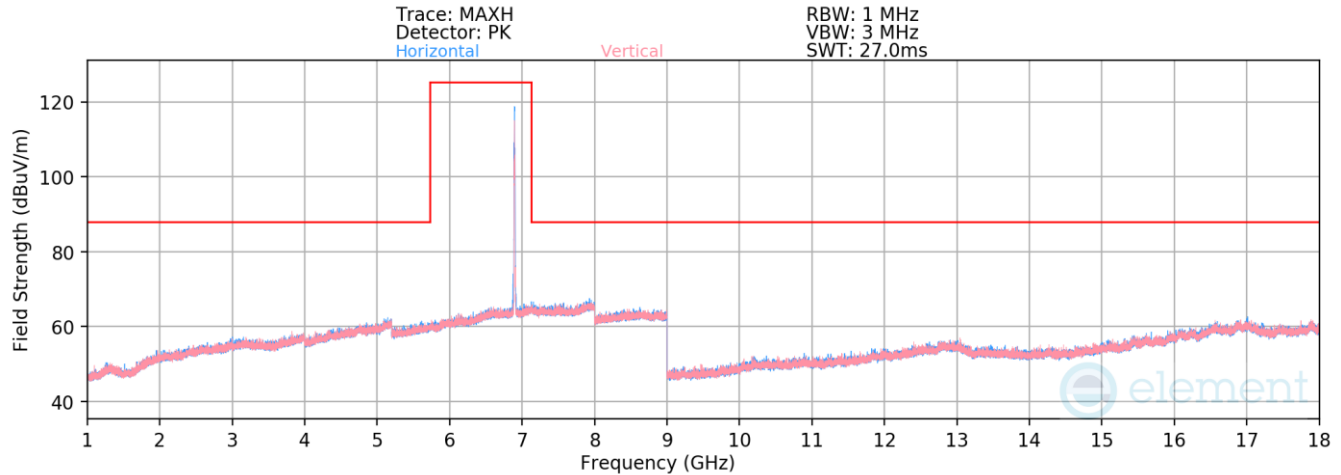

Plot 7-1355. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 189 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895MHz
Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13790.00	Average	V	-	-	-85.64	21.94	43.29	68.23	-24.94
13790.00	Peak	V	-	-	-74.04	21.94	54.89	88.23	-33.34


Table 7-213. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 418 of 635

V 11.0 05/2025

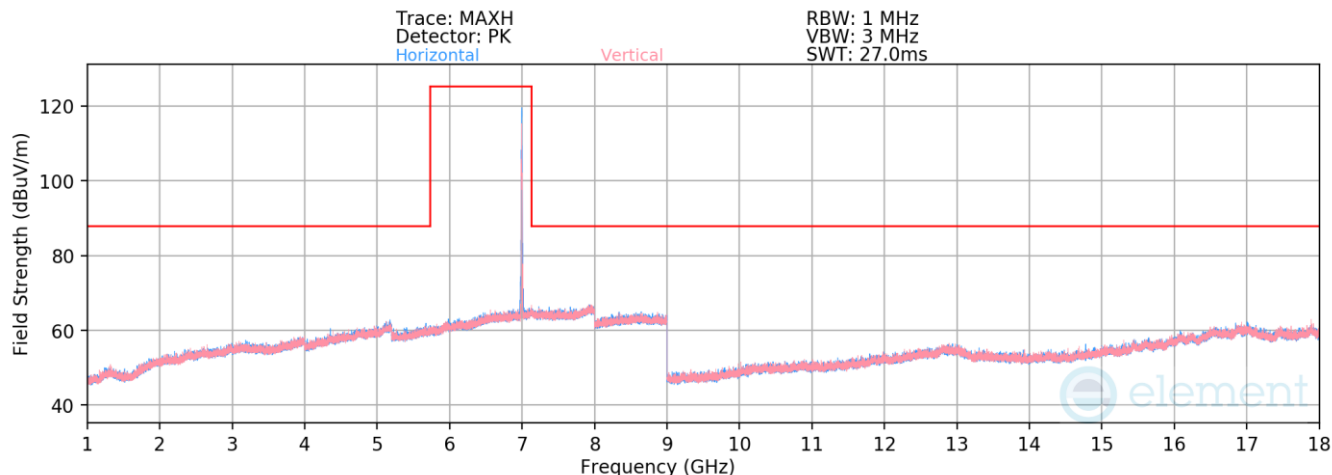

Plot 7-1356. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 209 – RU26)

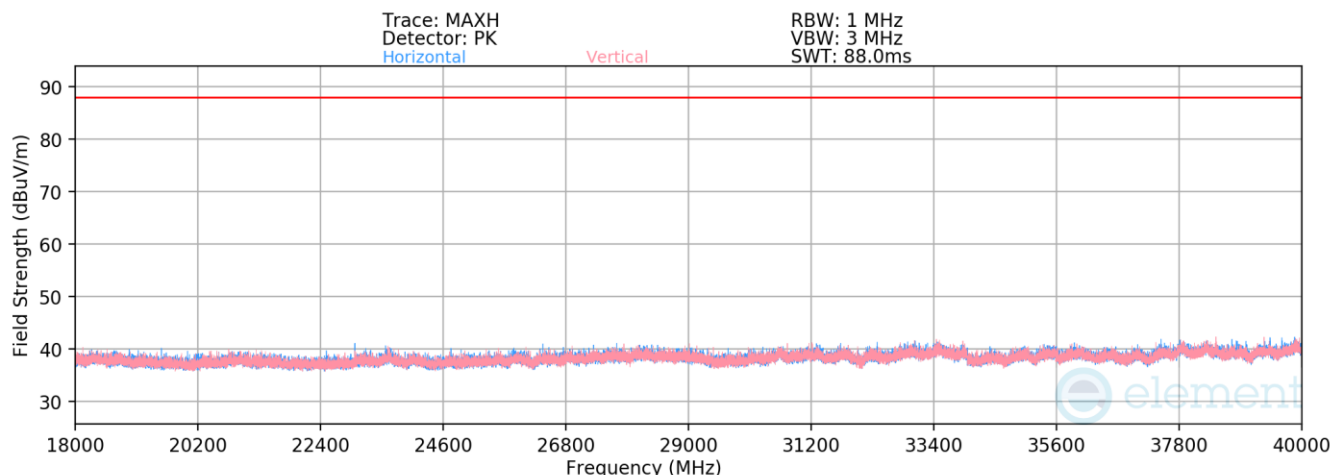

Plot 7-1357. Radiated Spurious Emissions 18-40GHz SDM Primary (802.11be – Ch. 209 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6995MHz
Channel: 209


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13990.00	Average	H	-	-	-86.20	22.12	42.92	68.23	-25.31
13990.00	Peak	H	-	-	-74.55	22.12	54.57	88.23	-33.66

Table 7-214. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device		Page 419 of 635

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

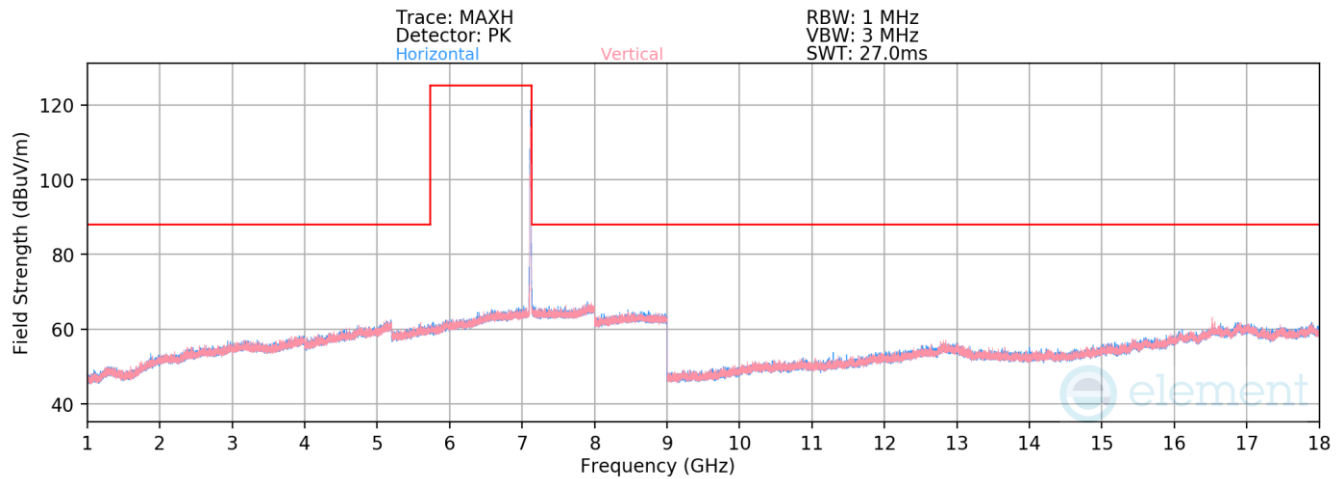

Plot 7-1358. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 229 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
14190.00	Average	H	-	-	-86.36	22.86	43.50	68.23	-24.73
14190.00	Peak	H	-	-	-75.13	22.86	54.73	88.23	-33.50


Table 7-215. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 420 of 635

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

RU242

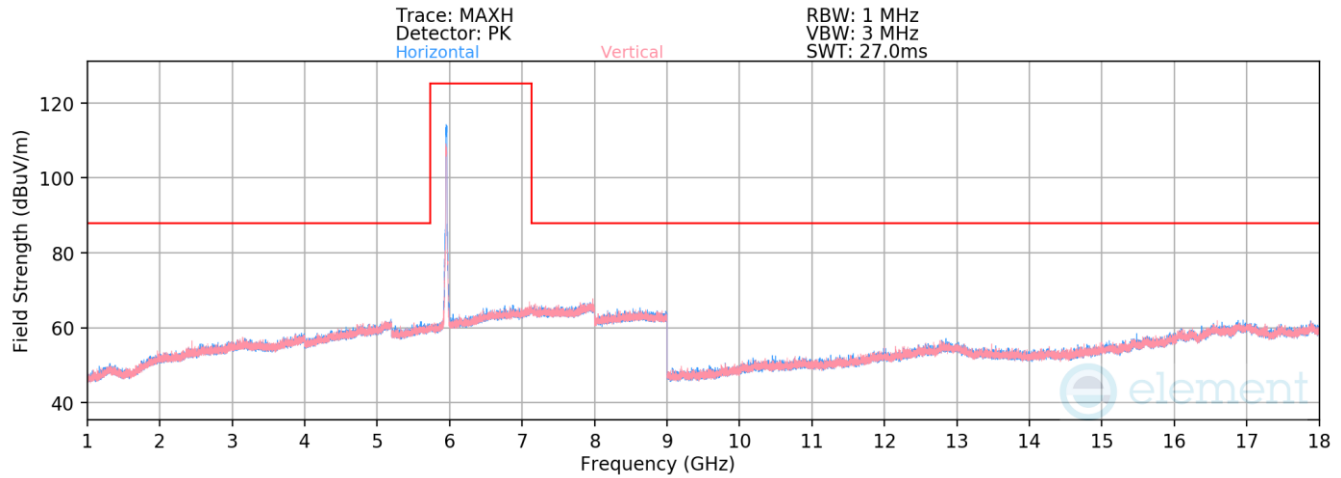

Plot 7-1359. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 1 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11910.00	Average	H	-	-	-86.15	20.60	41.45	53.98	-12.53
* 11910.00	Peak	H	-	-	-74.40	20.60	53.20	73.98	-20.78
* 17865.00	Average	H	-	-	-85.72	25.50	46.78	53.98	-7.20
* 17865.00	Peak	H	-	-	-74.71	25.50	57.78	73.98	-16.20

Table 7-216. Radiated Spurious Emission Measurements CDD Primary – RU242


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 421 of 635

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

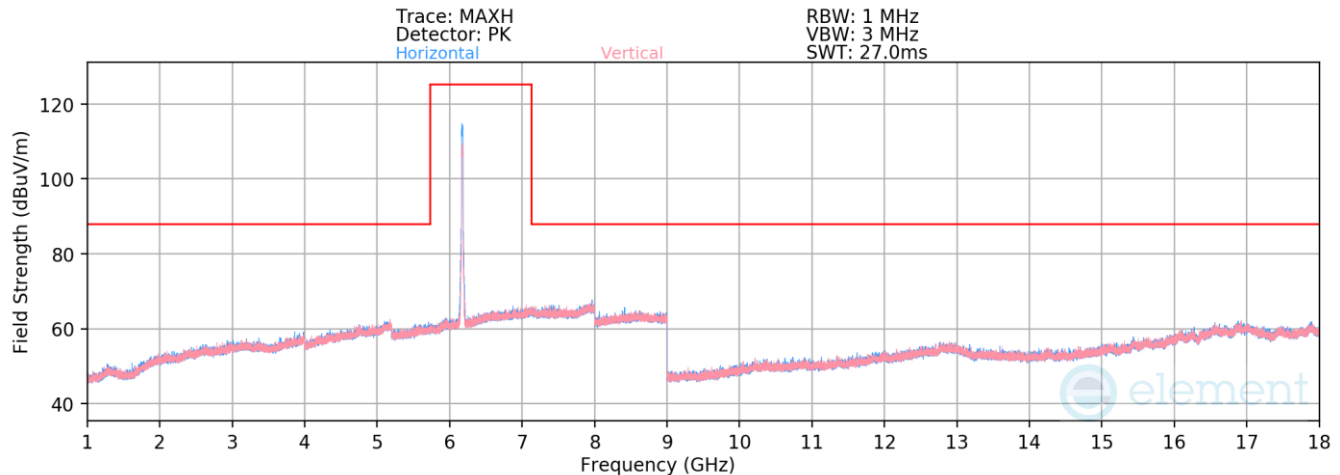

Plot 7-1360. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 45 – RU242)

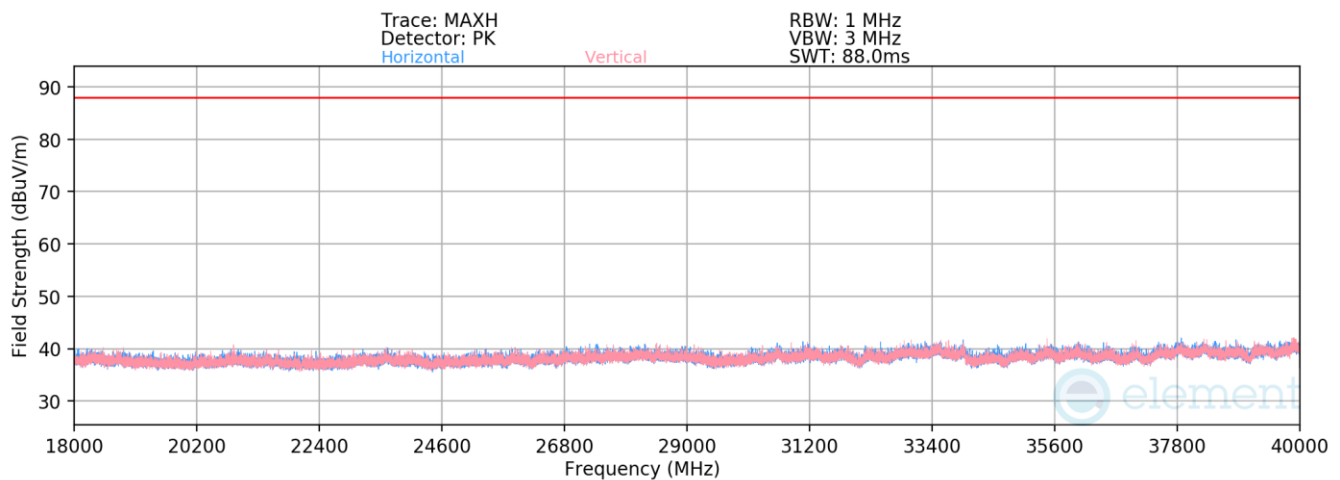

Plot 7-1361. Radiated Spurious Emissions 18-40GHz CDD Primary (802.11be – Ch. 45 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6175MHz
Channel: 45


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12350.00	Average	V	-	-	-85.42	20.88	42.46	53.98	-11.52
* 12350.00	Peak	V	-	-	-74.09	20.88	53.80	73.98	-20.18

Table 7-217. Radiated Spurious Emission Measurements CDD Primary – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device		Page 422 of 635

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

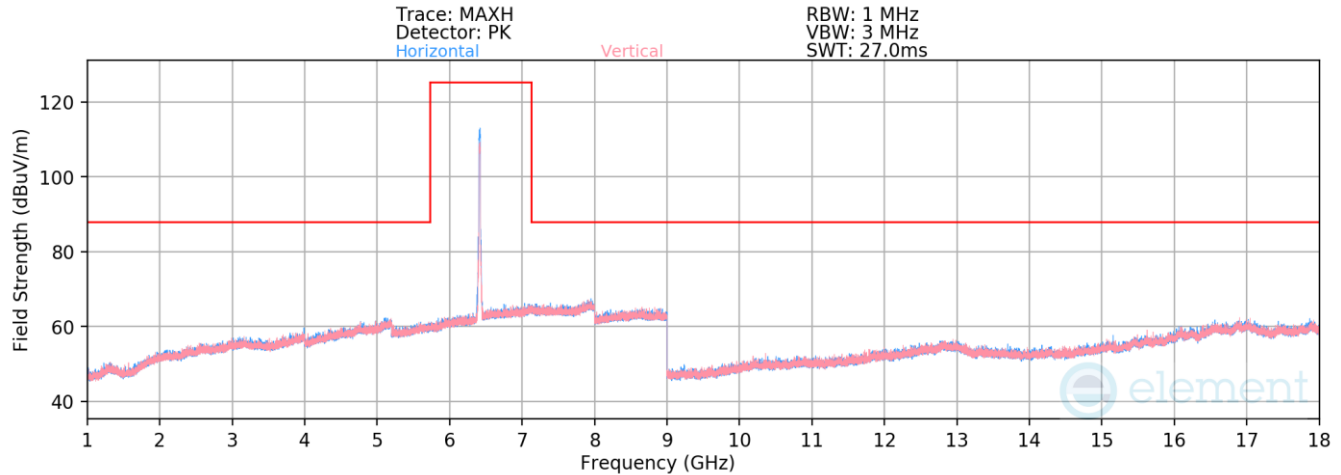

Plot 7-1362. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 93 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12830.00	Average	H	-	-	-85.68	22.11	43.42	68.23	-24.81
12830.00	Peak	H	-	-	-74.23	22.11	54.87	88.23	-33.36

Table 7-218. Radiated Spurious Emission Measurements CDD Primary – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 423 of 635

V 11.0 05/2025

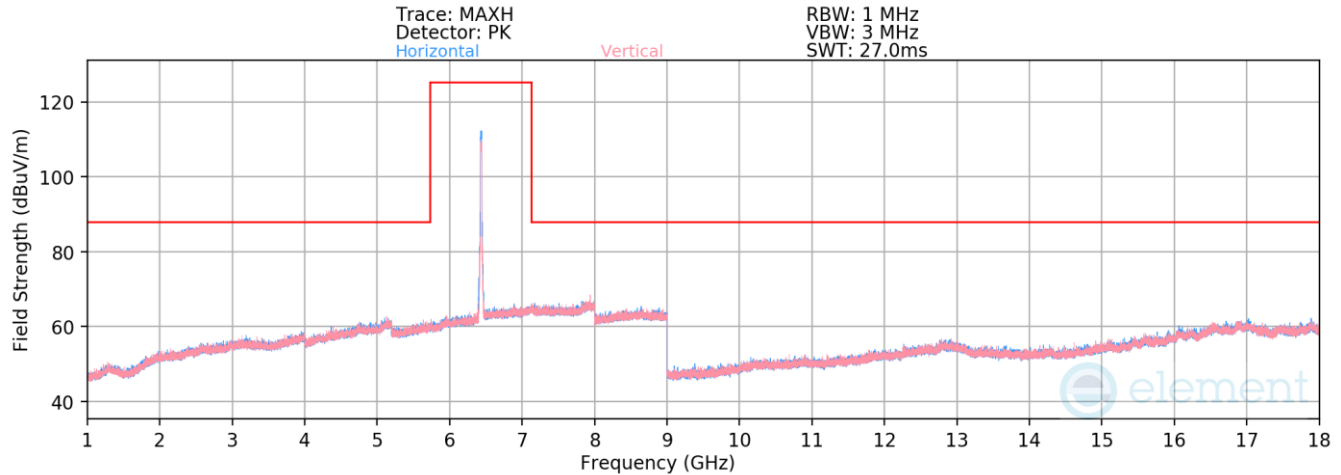

Plot 7-1363. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 97 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435MHz
Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12870.00	Average	H	-	-	-85.46	21.97	43.50	68.23	-24.73
12870.00	Peak	H	-	-	-73.33	21.97	55.64	88.23	-32.59


Table 7-219. Radiated Spurious Emission Measurements CDD Primary – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 424 of 635

V 11.0 05/2025

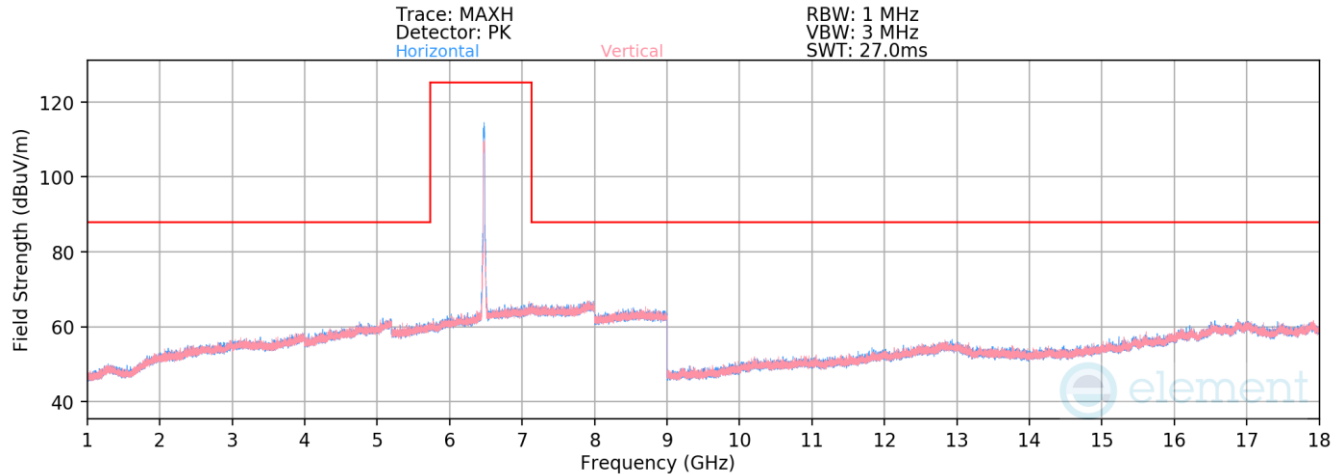

Plot 7-1364. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 105 – RU242)

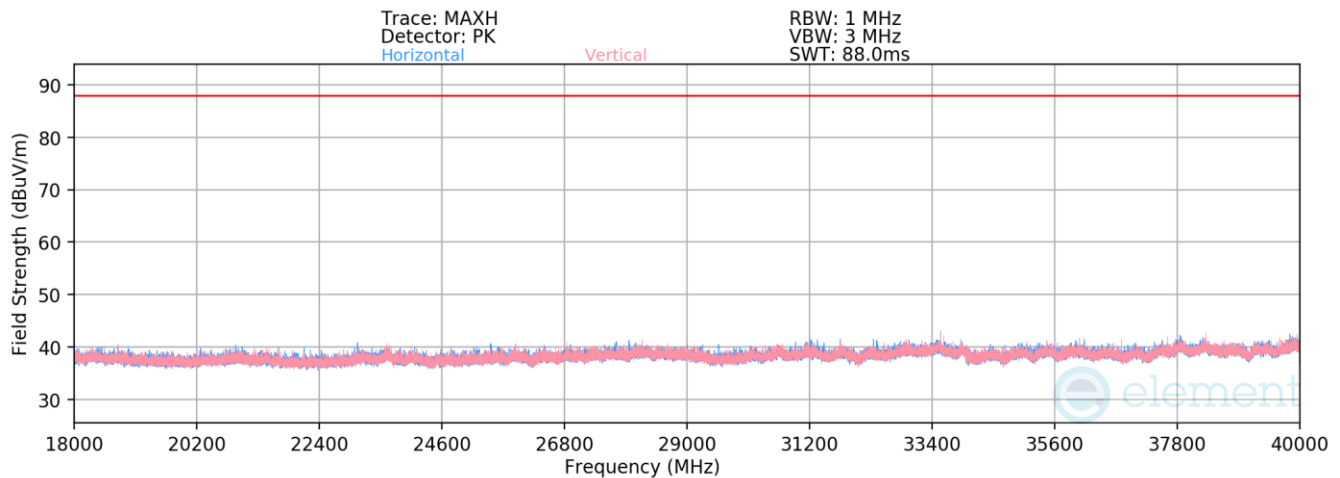

Plot 7-1365. Radiated Spurious Emissions 18-40GHz CDD Primary (802.11be – Ch. 105 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6475MHz
Channel: 105


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12950.00	Average	H	-	-	-85.38	21.75	43.36	68.23	-24.87
12950.00	Peak	H	-	-	-74.31	21.75	54.44	88.23	-33.79

Table 7-220. Radiated Spurious Emission Measurements CDD Primary – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 425 of 635

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

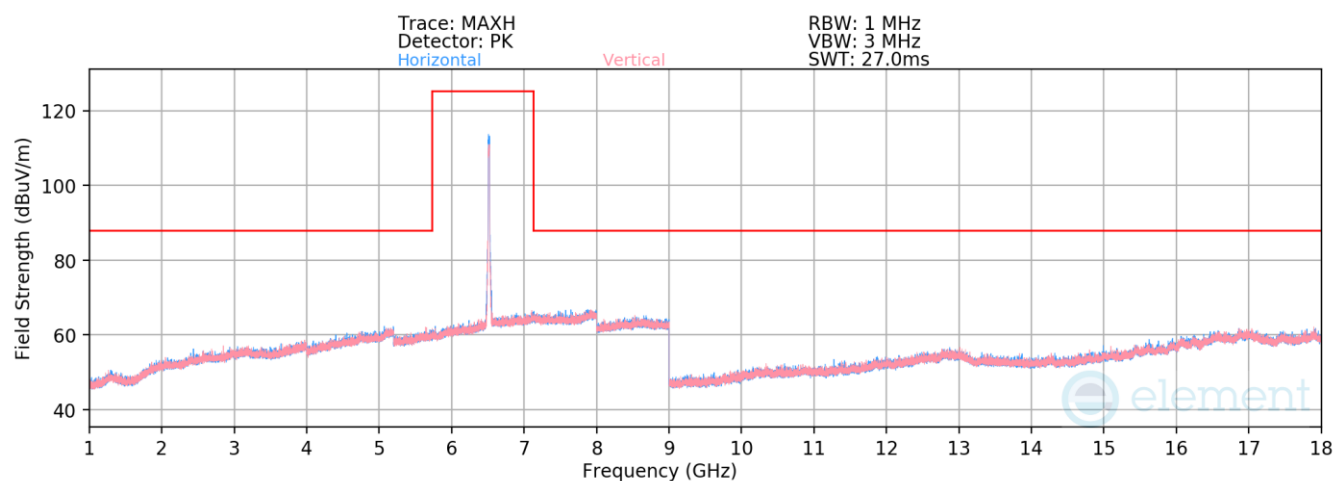

Plot 7-1366. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 113 – RU242)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6515MHz
Channel:	113


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13030.00	Average	V	-	-	-85.25	22.12	43.87	68.23	-24.36
13030.00	Peak	V	-	-	-73.71	22.12	55.41	88.23	-32.82

Table 7-221. Radiated Spurious Emission Measurements CDD Primary – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 426 of 635

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

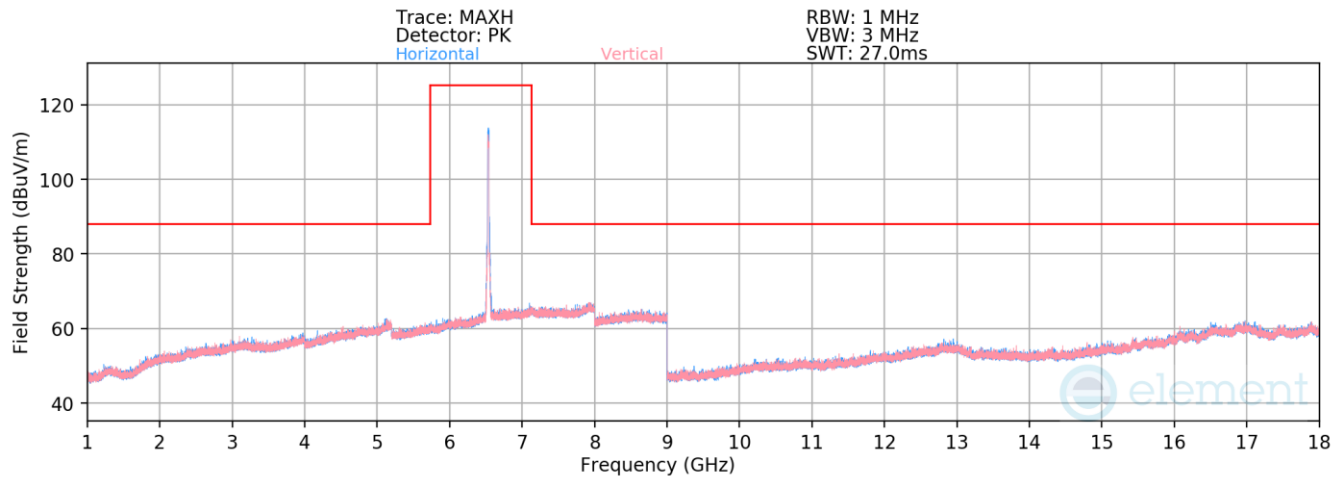

Plot 7-1367. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 117 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535MHz
Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13070.00	Average	V	-	-	-85.77	22.11	43.34	68.23	-24.89
13070.00	Peak	V	-	-	-73.54	22.11	55.57	88.23	-32.66


Table 7-222. Radiated Spurious Emission Measurements CDD Primary – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 427 of 635

V 11.0 05/2025

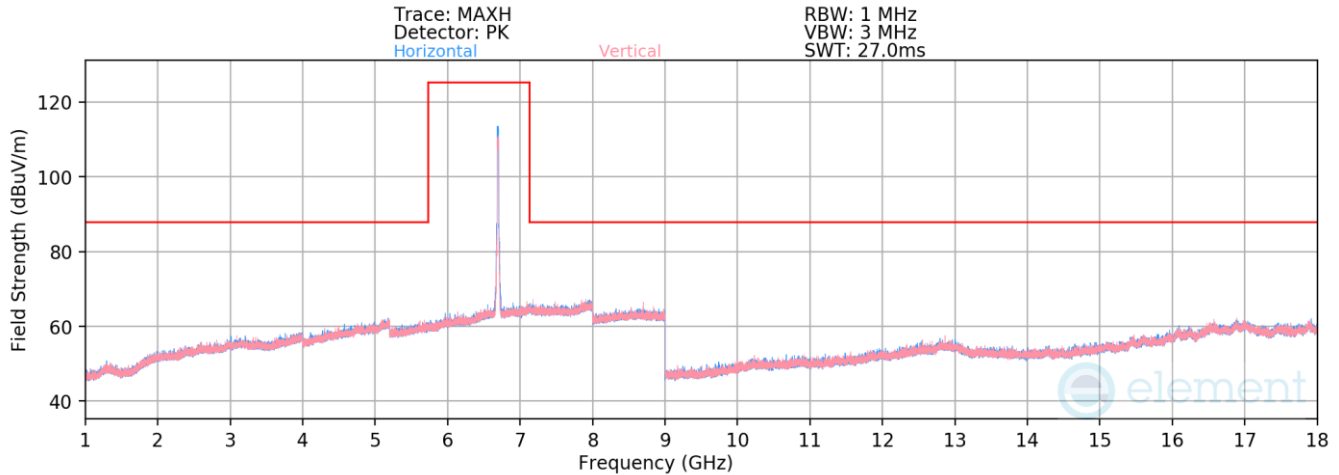

Plot 7-1368. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 149 – RU242)

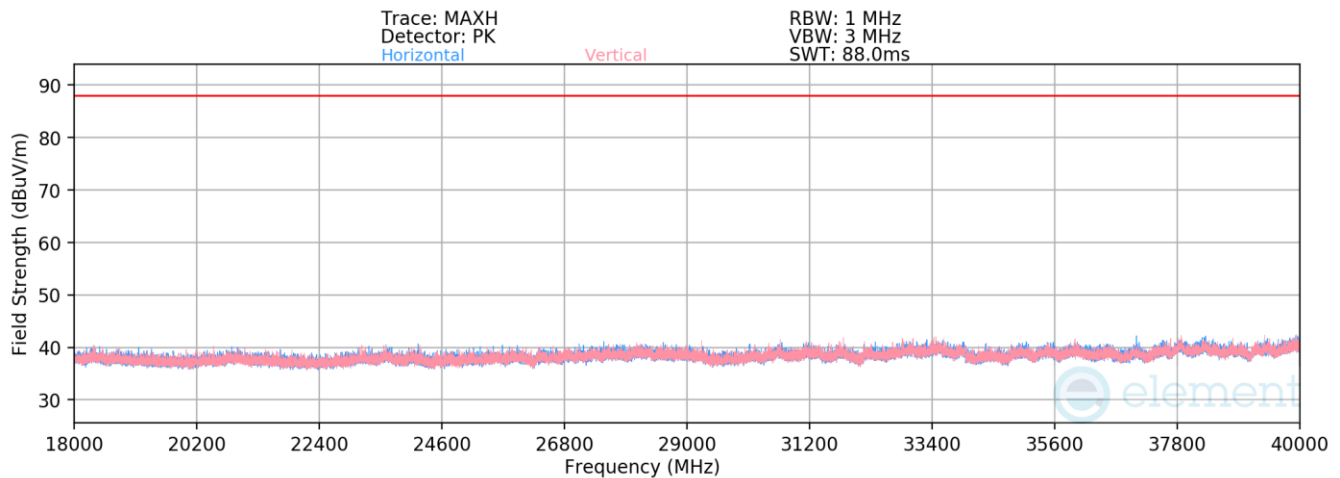

Plot 7-1369. Radiated Spurious Emissions 18-40GHz CDD Primary (802.11be – Ch. 149 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6695MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 13390.00	Average	H	-	-	-85.24	21.80	43.56	53.98	-10.42
* 13390.00	Peak	H	-	-	-74.45	21.80	54.35	73.98	-19.63

Table 7-223. Radiated Spurious Emission Measurements CDD Primary – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 428 of 635

V 11.0 05/2025

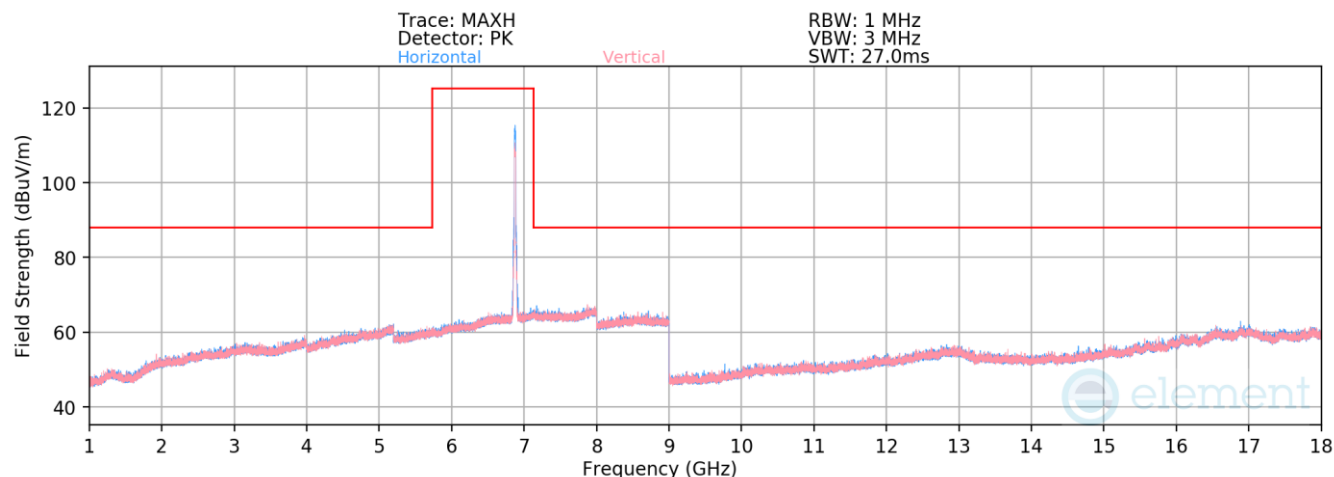

Plot 7-1370. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 185 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6875MHz
Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13750.00	Average	V	-	-	-86.35	21.78	42.43	68.23	-25.80
13750.00	Peak	V	-	-	-74.50	21.78	54.28	88.23	-33.95

Table 7-224. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 429 of 635

V 11.0 05/2025

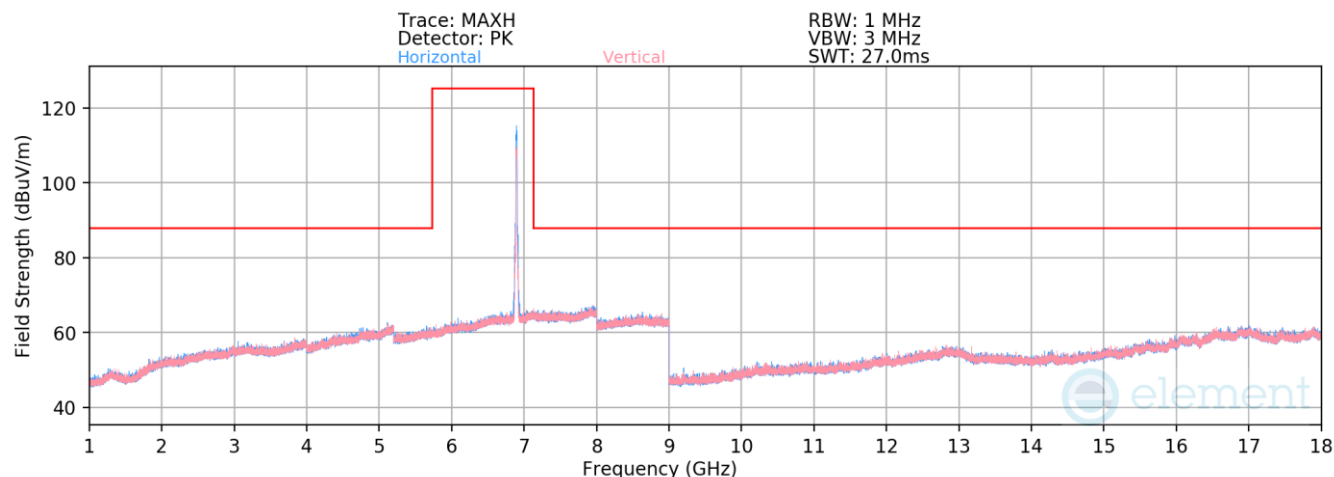

Plot 7-1371. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 189 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895MHz
Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13790.00	Average	H	-	-	-85.64	21.94	43.29	68.23	-24.94
13790.00	Peak	H	-	-	-74.24	21.94	54.70	88.23	-33.53


Table 7-225. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device		Page 430 of 635

V 11.0 05/2025

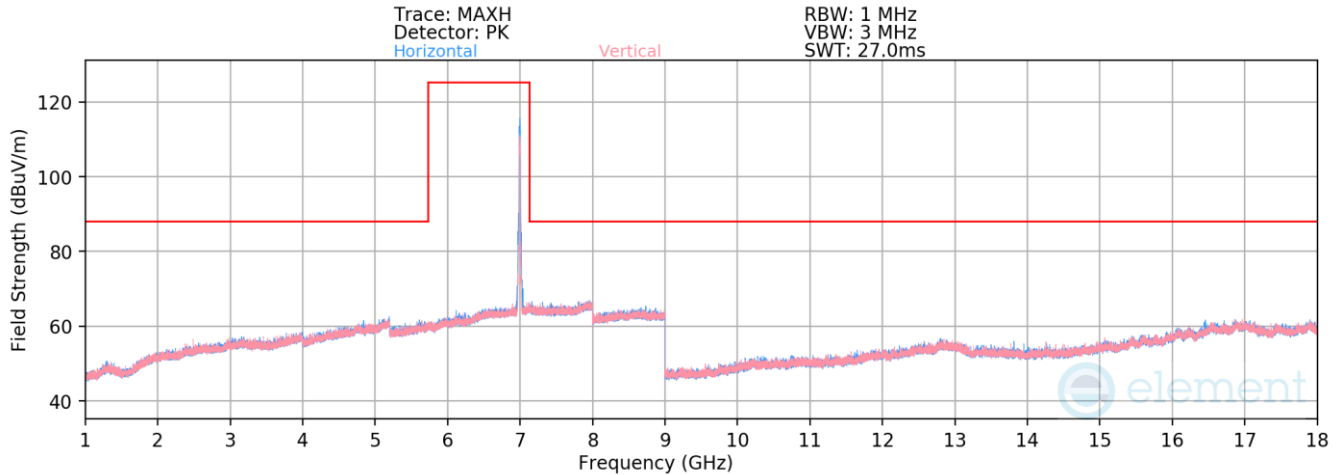

Plot 7-1372. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 209 – RU242)

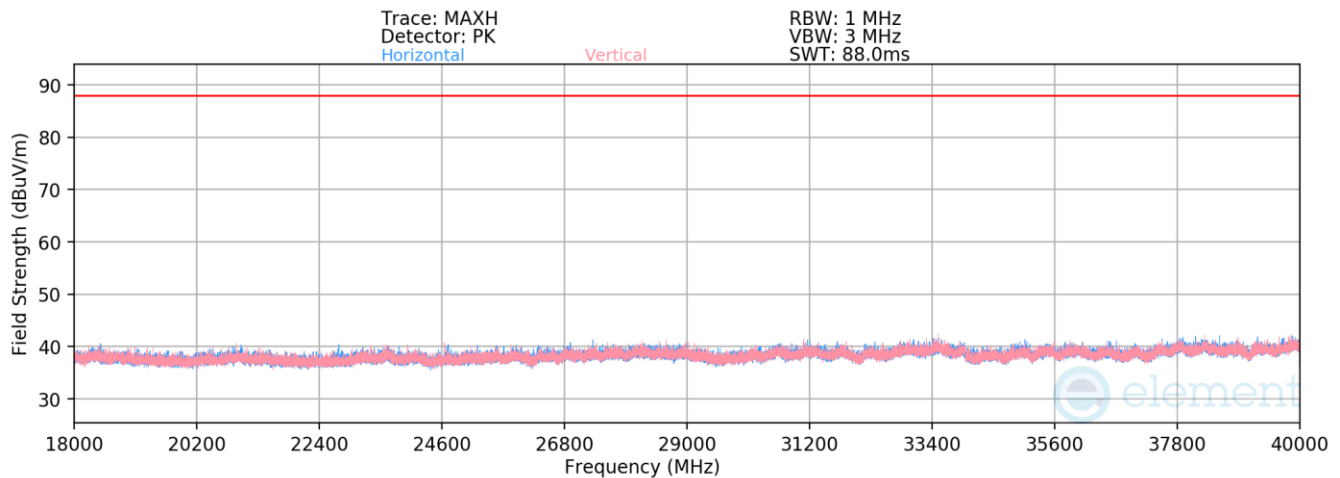

Plot 7-1373. Radiated Spurious Emissions 18-40GHz SDM Primary (802.11be – Ch. 209 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6995MHz
Channel: 209


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13990.00	Average	H	-	-	-86.91	22.25	42.34	68.23	-25.89
13990.00	Peak	H	-	-	-74.25	22.25	55.00	88.23	-33.23

Table 7-226. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 431 of 635

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

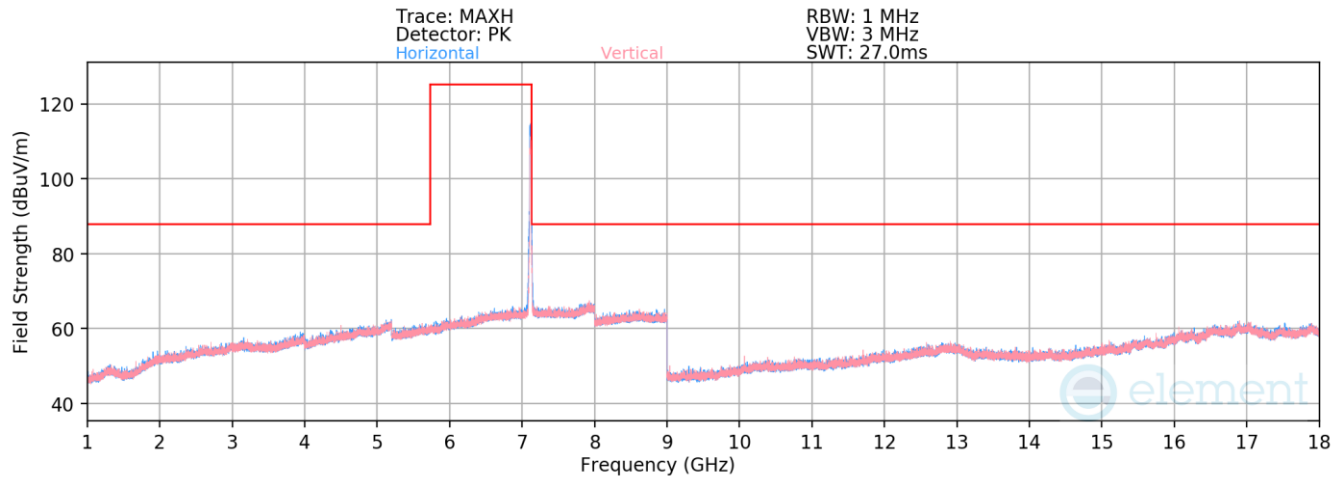

Plot 7-1374. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 233 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 7115MHz
Channel: 233

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
14230.00	Average	H	-	-	-86.66	22.92	43.26	68.23	-24.97
14230.00	Peak	H	-	-	-74.10	22.92	55.82	88.23	-32.41


Table 7-227. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 432 of 635

V 11.0 05/2025

7.7.2 CDD/SDM Diversity Radiated Spurious Emission

RU26

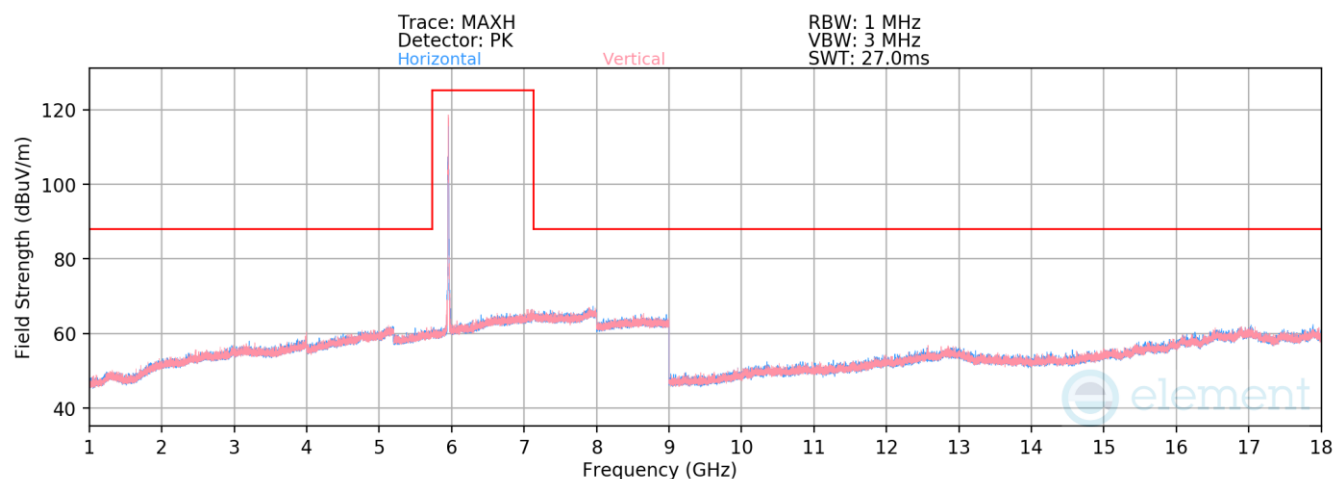

Plot 7-1375. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 1 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11910.00	Average	V	-	-	-85.46	20.43	41.97	53.98	-12.01
* 11910.00	Peak	V	-	-	-74.68	20.43	52.75	73.98	-21.23
* 17865.00	Average	V	-	-	-85.50	25.50	47.00	53.98	-6.98
* 17865.00	Peak	V	-	-	-73.84	25.50	58.65	73.98	-15.33

Table 7-228. Radiated Spurious Emission Measurements CDD Diversity – RU26


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 433 of 635

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

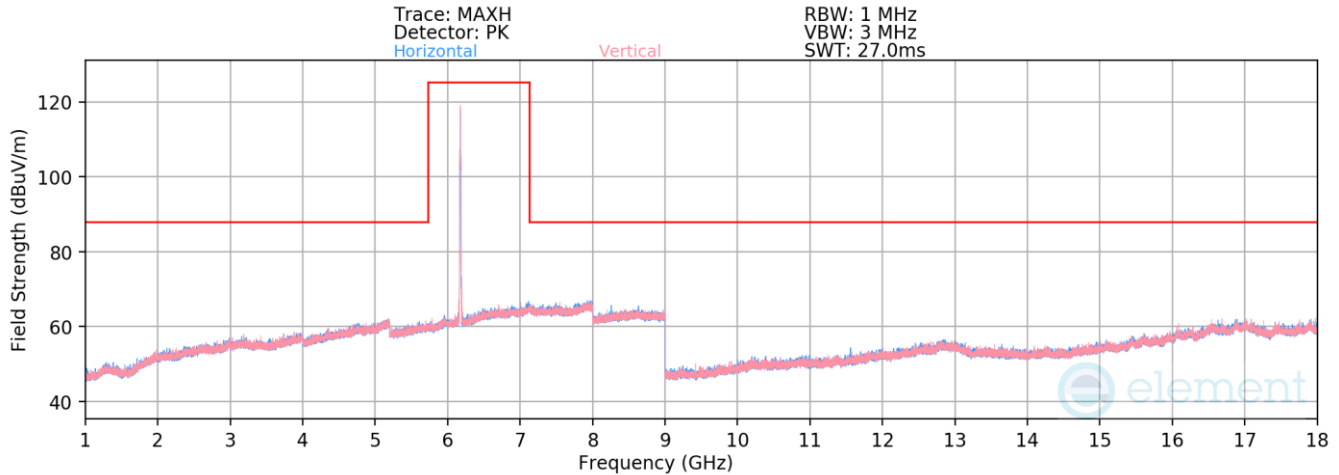

Plot 7-1376. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 45 – RU26)

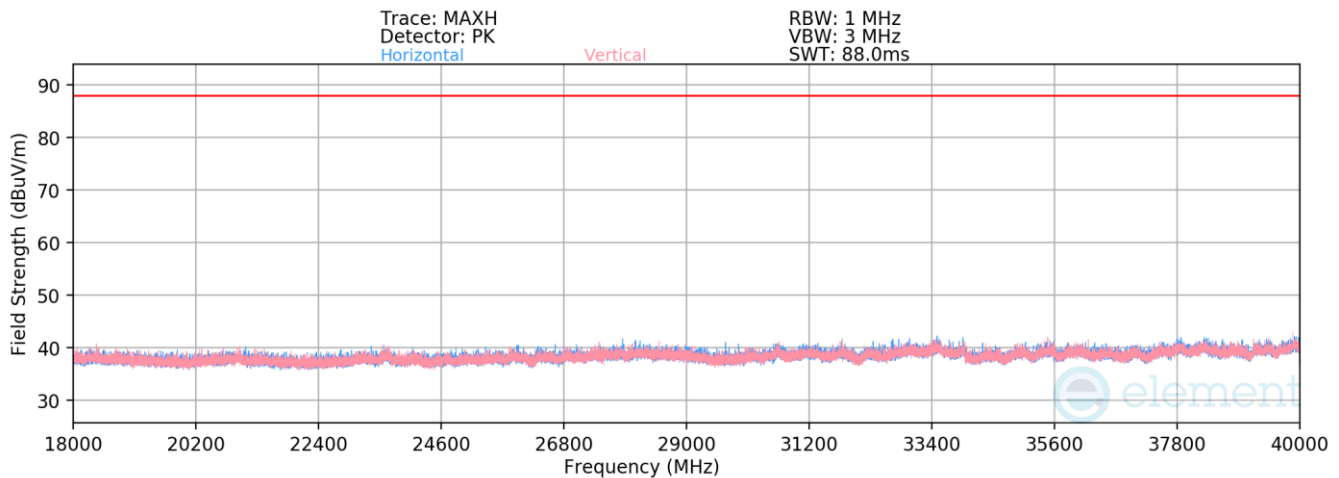


Plot 7-1377. Radiated Spurious Emissions 18-40GHz CDD Diversity (802.11be – Ch. 45 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6175MHz
Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12350.00	Average	H	-	-	-85.19	20.85	42.66	53.98	-11.32
* 12350.00	Peak	H	-	-	-74.43	20.85	53.43	73.98	-20.55

Table 7-229. Radiated Spurious Emission Measurements CDD Diversity – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device		Page 434 of 635

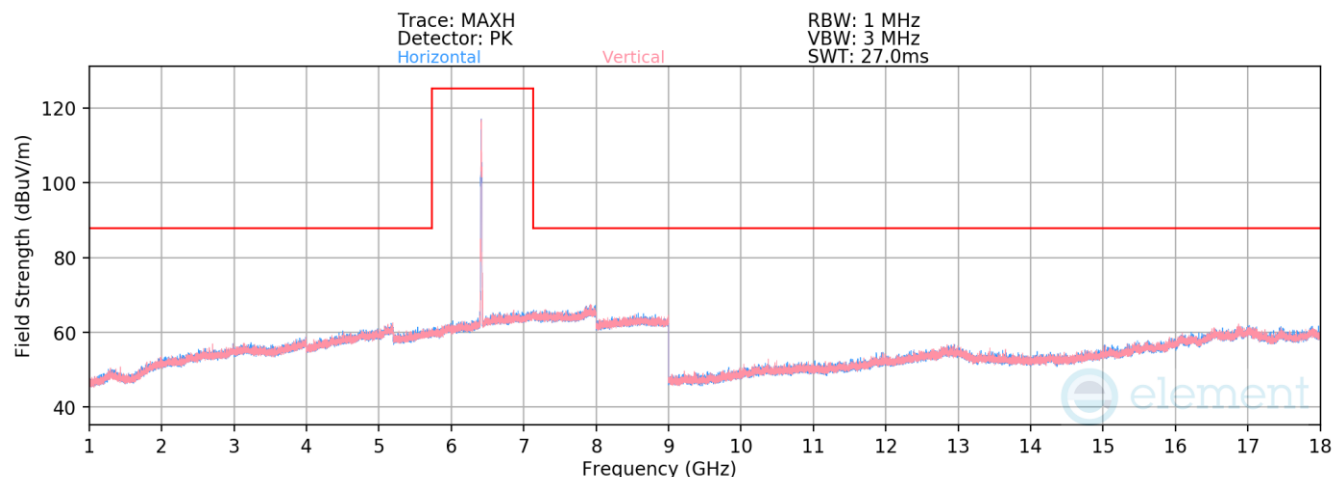

Plot 7-1378. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 93 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12830.00	Average	V	-	-	-85.47	22.11	43.64	68.23	-24.59
12830.00	Peak	V	-	-	-73.43	22.11	55.68	88.23	-32.55

Table 7-230. Radiated Spurious Emission Measurements CDD Diversity – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device		Page 435 of 635

V 11.0 05/2025

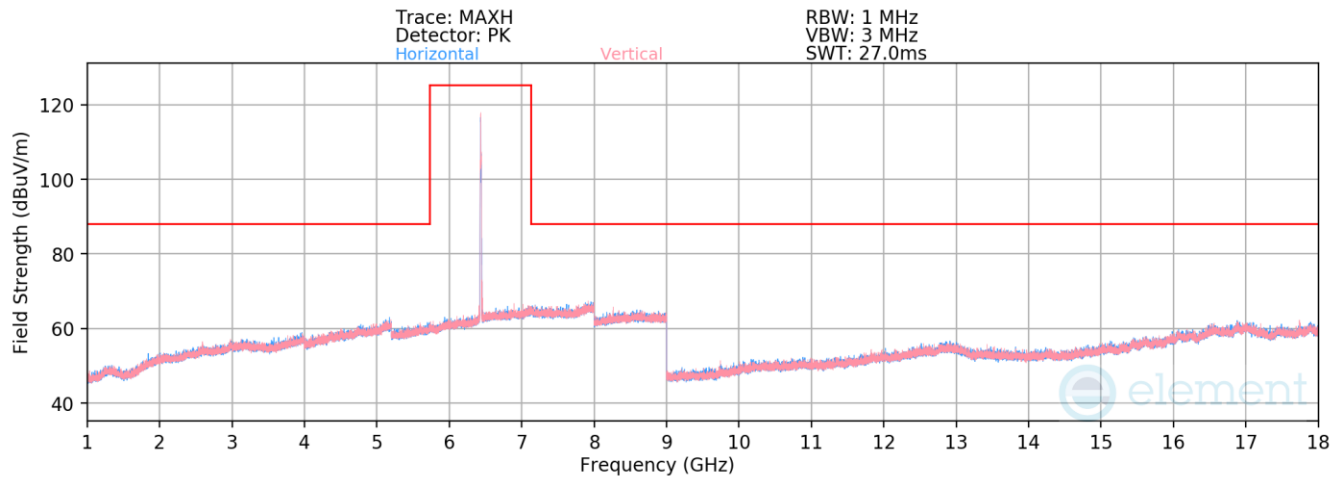

Plot 7-1379. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 97 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435MHz
Channel: 97


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12870.00	Average	V	-	-	-85.08	21.87	43.79	68.23	-24.44
12870.00	Peak	V	-	-	-72.63	21.87	56.24	88.23	-31.99

Table 7-231. Radiated Spurious Emission Measurements CDD Diversity – RU26


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 436 of 635

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

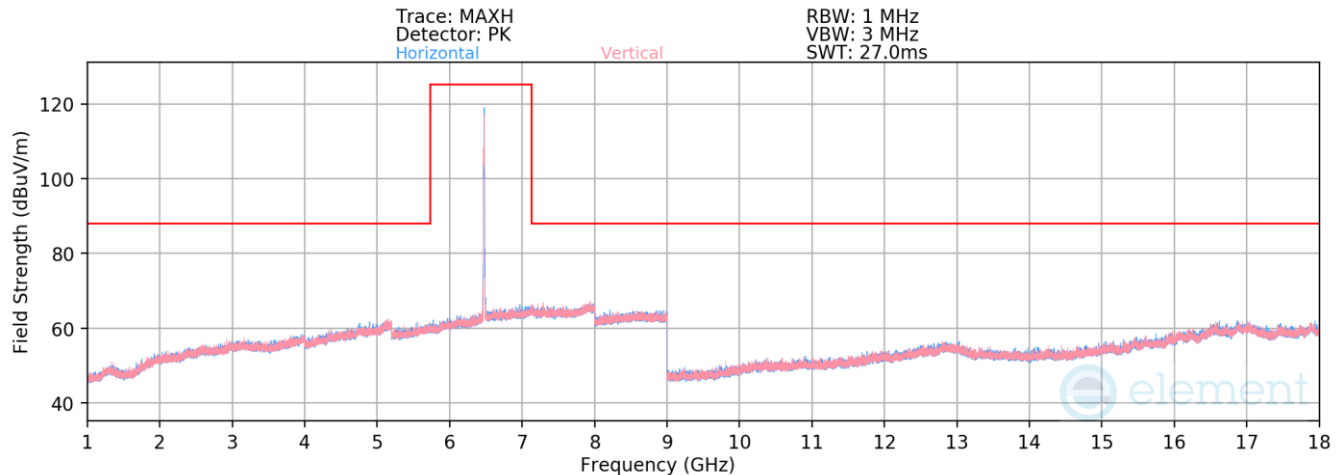

Plot 7-1380. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 105 – RU26)

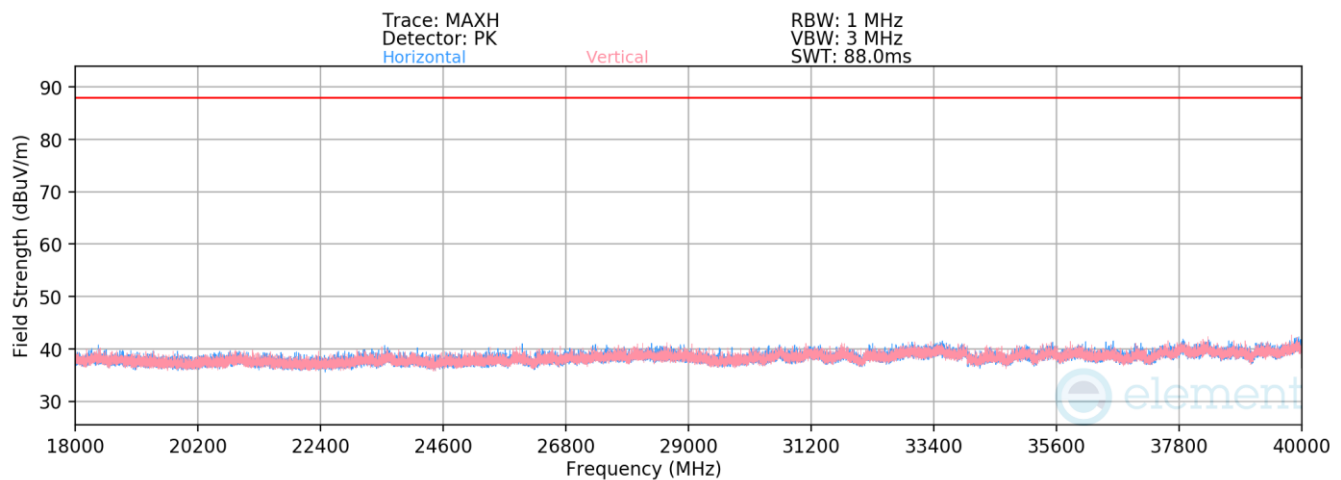

Plot 7-1381. Radiated Spurious Emissions 18-40GHz CDD Diversity (802.11be – Ch. 105 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6475MHz
Channel: 105


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12950.00	Average	V	-	-	-85.34	21.88	43.54	68.23	-24.69
12950.00	Peak	V	-	-	-73.71	21.88	55.18	88.23	-33.05

Table 7-232. Radiated Spurious Emission Measurements CDD Diversity – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 437 of 635

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

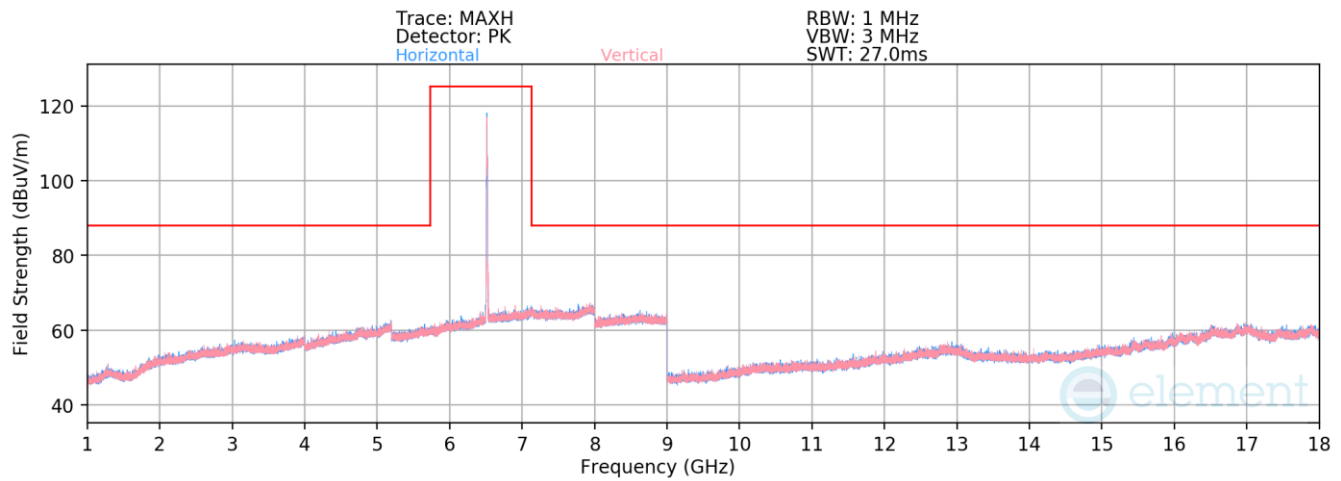

Plot 7-1382. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 113 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6515MHz
Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13030.00	Average	V	-	-	-85.49	22.09	43.60	68.23	-24.63
13030.00	Peak	V	-	-	-74.44	22.09	54.65	88.23	-33.58

Table 7-233. Radiated Spurious Emission Measurements CDD Diversity – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 438 of 635

V 11.0 05/2025

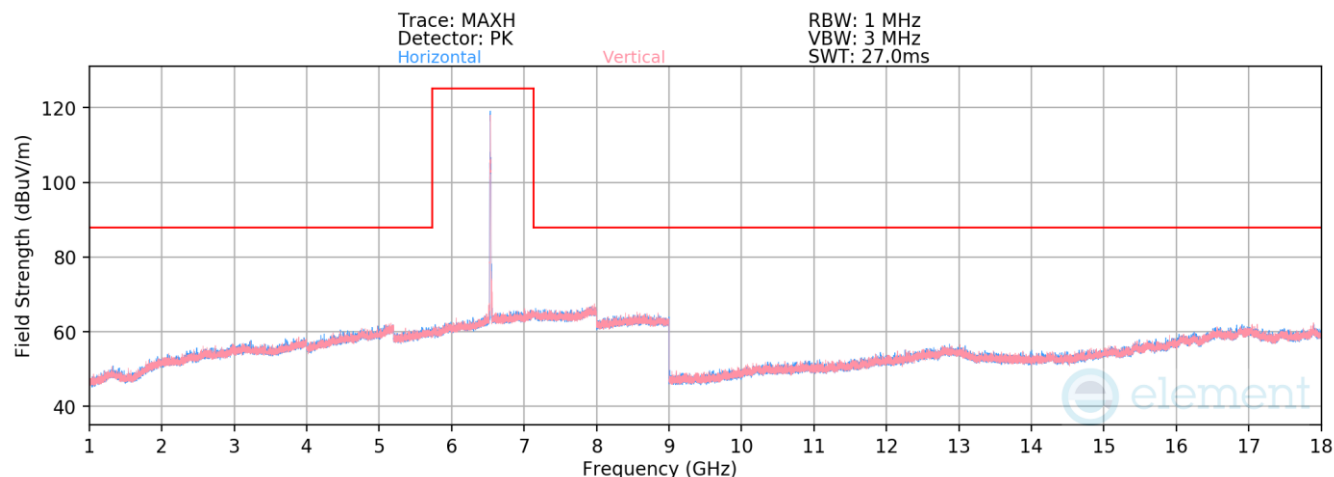

Plot 7-1383. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 117 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535MHz
Channel: 117


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13070.00	Average	V	-	-	-85.30	22.02	43.72	68.23	-24.51
13070.00	Peak	V	-	-	-73.92	22.02	55.10	88.23	-33.13

Table 7-234. Radiated Spurious Emission Measurements CDD Diversity – RU26


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 439 of 635

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

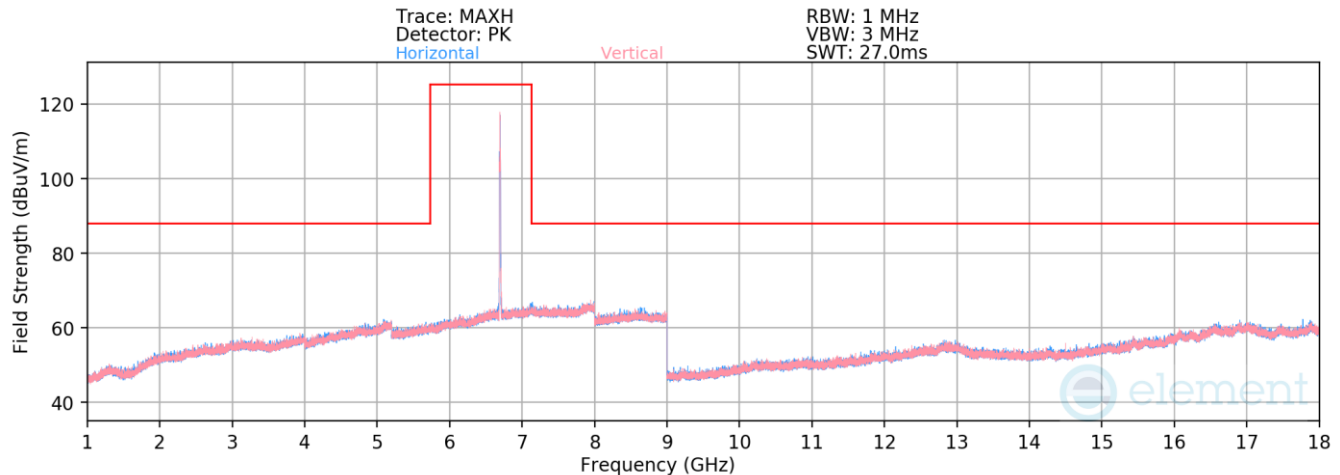

Plot 7-1384. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 149 – RU26)

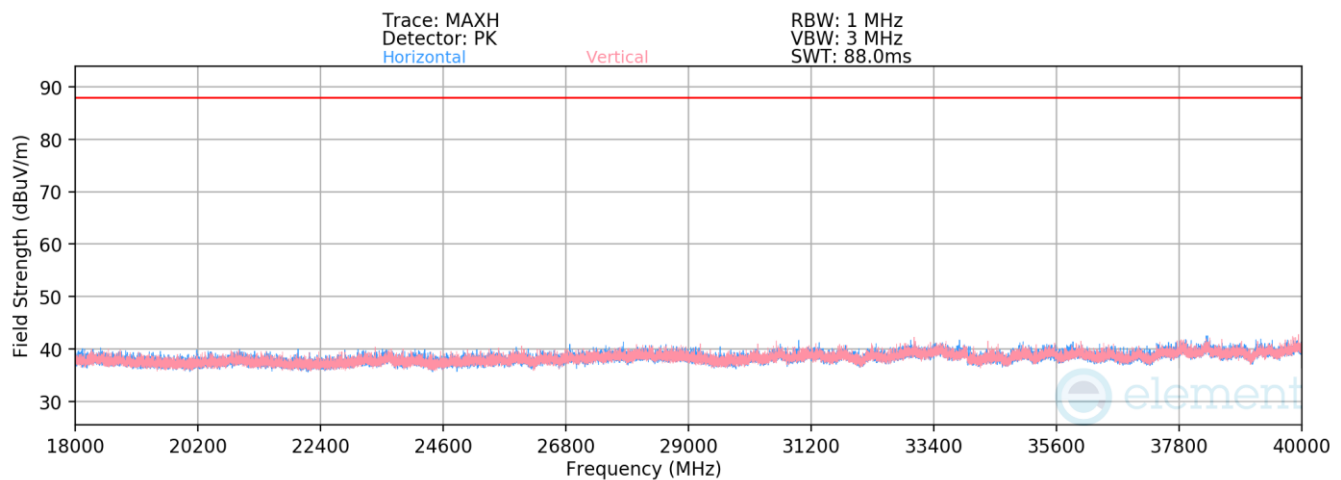

Plot 7-1385. Radiated Spurious Emissions 18-40GHz CDD Diversity (802.11be – Ch. 149 – RU26)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6695MHz
Channel:	149


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13390.00	Average	V	-	-	-85.55	22.01	43.46	68.23	-24.77
* 13390.00	Peak	V	-	-	-74.20	22.01	54.81	73.98	-19.17

Table 7-235. Radiated Spurious Emission Measurements CDD Diversity – RU26

FCC ID: BCGA3361 IC: 579C-A3361	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 440 of 635

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

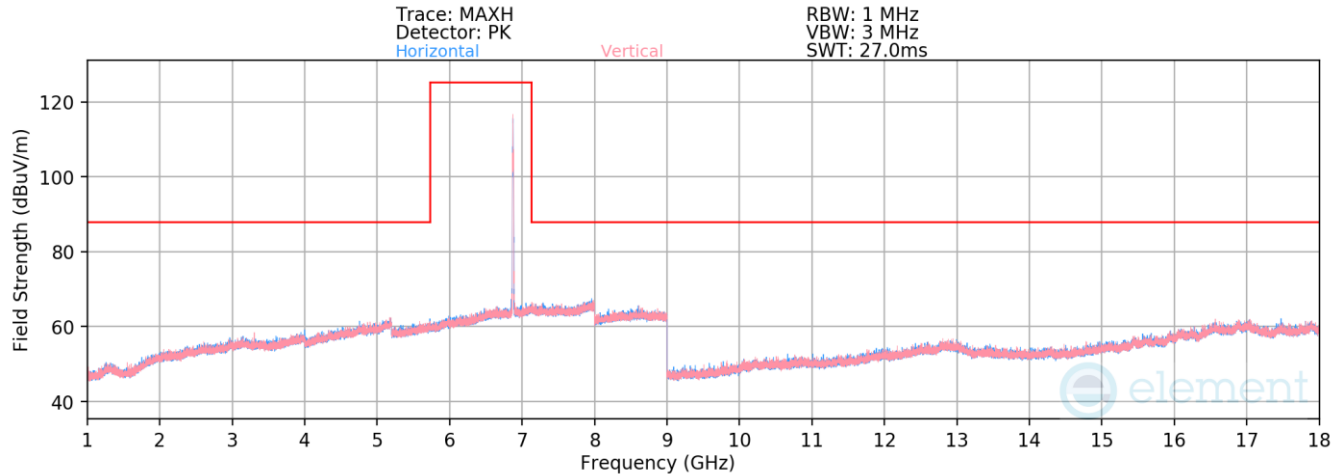

Plot 7-1386. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 185 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6875MHz
Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13750.00	Average	V	-	-	-85.83	21.79	42.96	68.23	-25.27
13750.00	Peak	V	-	-	-74.64	21.79	54.15	88.23	-34.08

Table 7-236. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 441 of 635

V 11.0 05/2025

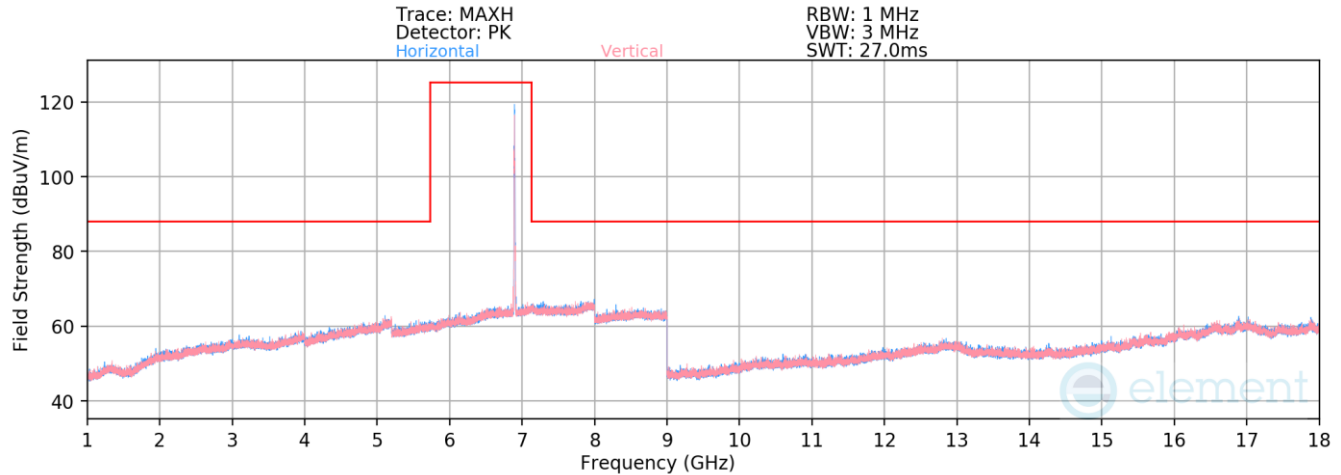

Plot 7-1387. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 189 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895MHz
Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13790.00	Average	V	-	-	-85.97	22.16	43.19	68.23	-25.04
13790.00	Peak	V	-	-	-74.14	22.16	55.02	88.23	-33.21


Table 7-237. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device		Page 442 of 635

V 11.0 05/2025

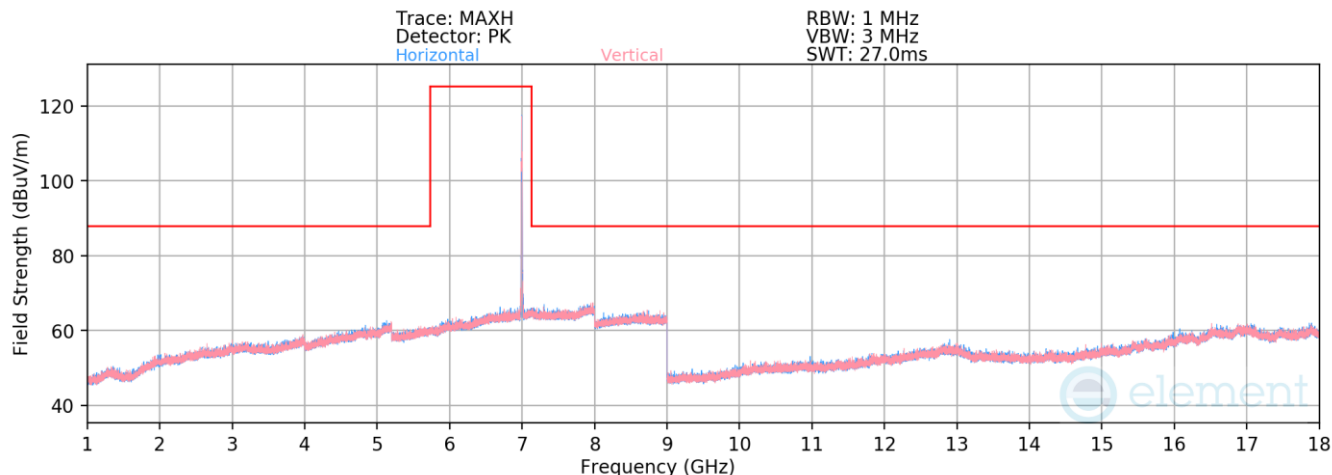

Plot 7-1388. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 209 – RU26)

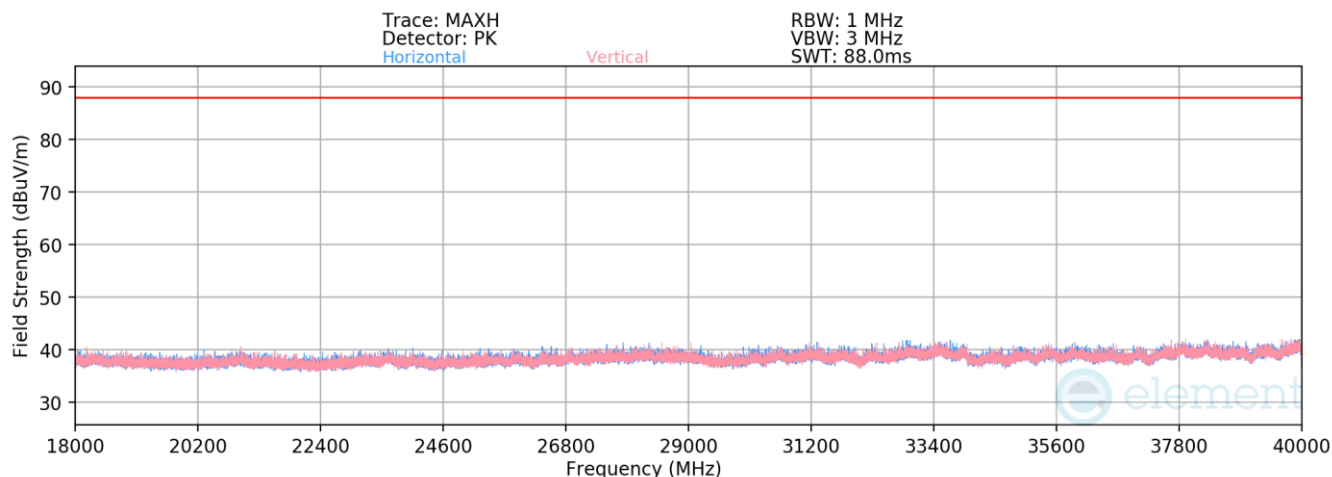

Plot 7-1389. Radiated Spurious Emissions 18-40GHz SDM Diversity (802.11be – Ch. 209 – RU26)

Mode: 802.11be

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6995MHz

Channel: 209


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13990.00	Average	V	-	-	-86.17	22.04	42.87	68.23	-25.36
13990.00	Peak	V	-	-	-74.96	22.04	54.08	88.23	-34.15

Table 7-238. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device		Page 443 of 635

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

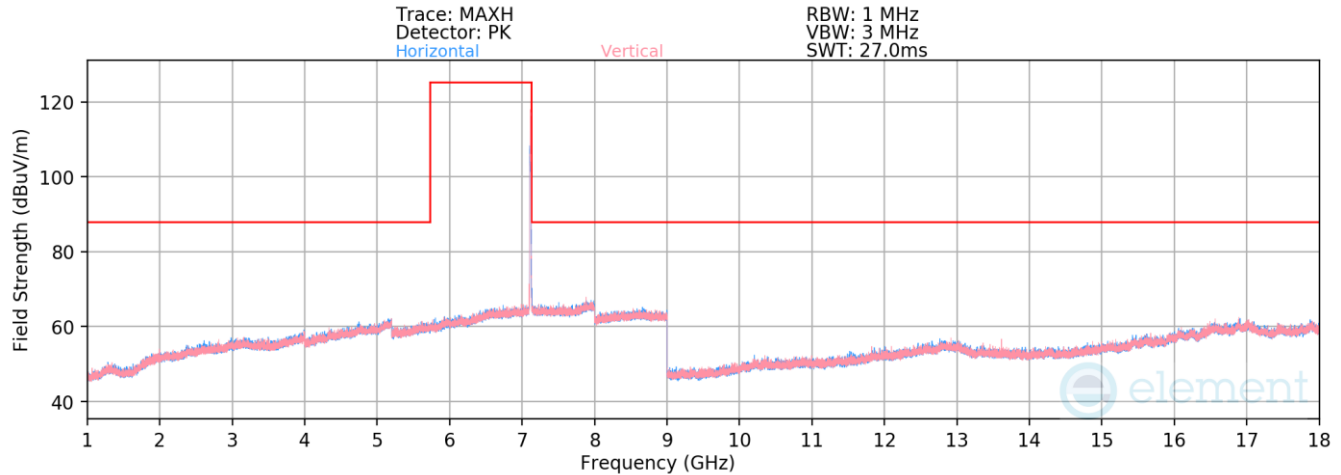

Plot 7-1390. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 229 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
14190.00	Average	H	-	-	-86.30	22.69	43.39	68.23	-24.84
14190.00	Peak	H	-	-	-74.94	22.69	54.75	88.23	-33.48

Table 7-239. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device		Page 444 of 635

V 11.0 05/2025

RU242

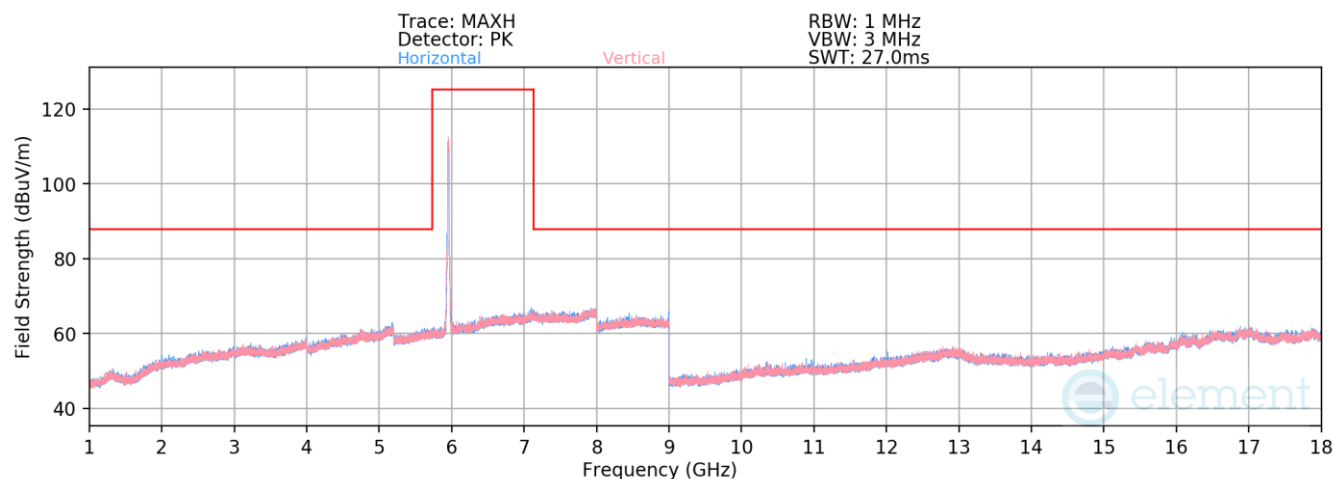

Plot 7-1391. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 1 – RU242)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5955MHz
Channel:	1


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11910.00	Average	V	-	-	-85.11	20.15	42.04	53.98	-11.94
*	11910.00	Peak	V	-	-	-74.43	20.15	52.72	73.98	-21.26
*	17865.00	Average	H	-	-	-85.56	25.82	47.27	53.98	-6.71
*	17865.00	Peak	H	-	-	-74.64	25.82	58.19	73.98	-15.79

Table 7-240. Radiated Spurious Emission Measurements CDD Diversity – RU242


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 445 of 635

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

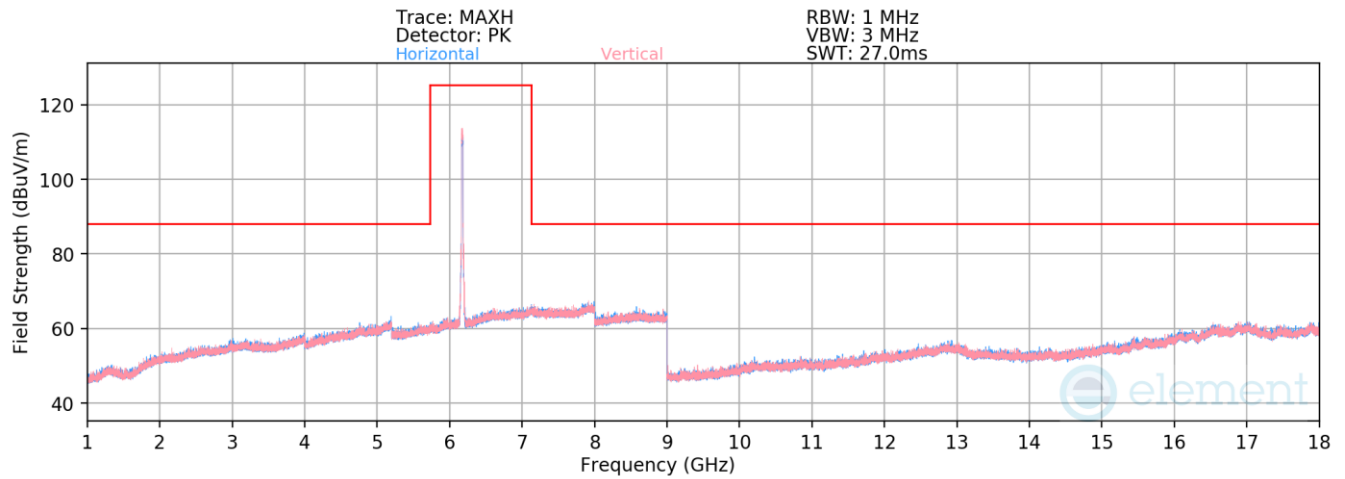

Plot 7-1392. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 45 – RU242)

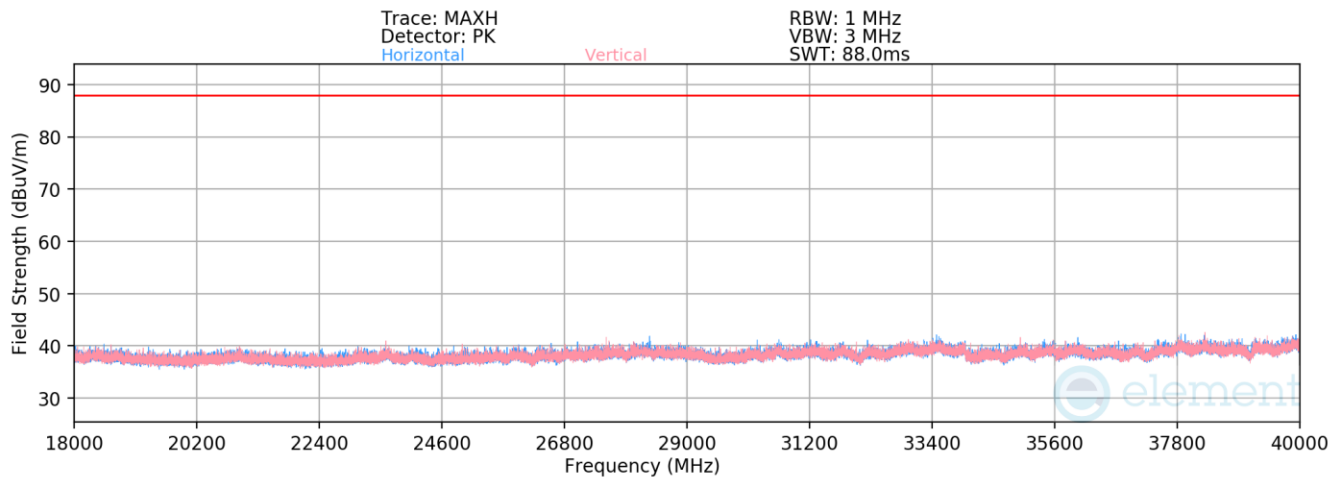

Plot 7-1393. Radiated Spurious Emissions 18-40GHz CDD Diversity (802.11be – Ch. 45 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6175MHz
Channel: 45


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 12350.00	Average	V	-	-	-84.88	20.88	43.00	53.98	-10.98
* 12350.00	Peak	V	-	-	-73.72	20.88	54.17	73.98	-19.81

Table 7-241. Radiated Spurious Emission Measurements CDD Diversity – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 446 of 635

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

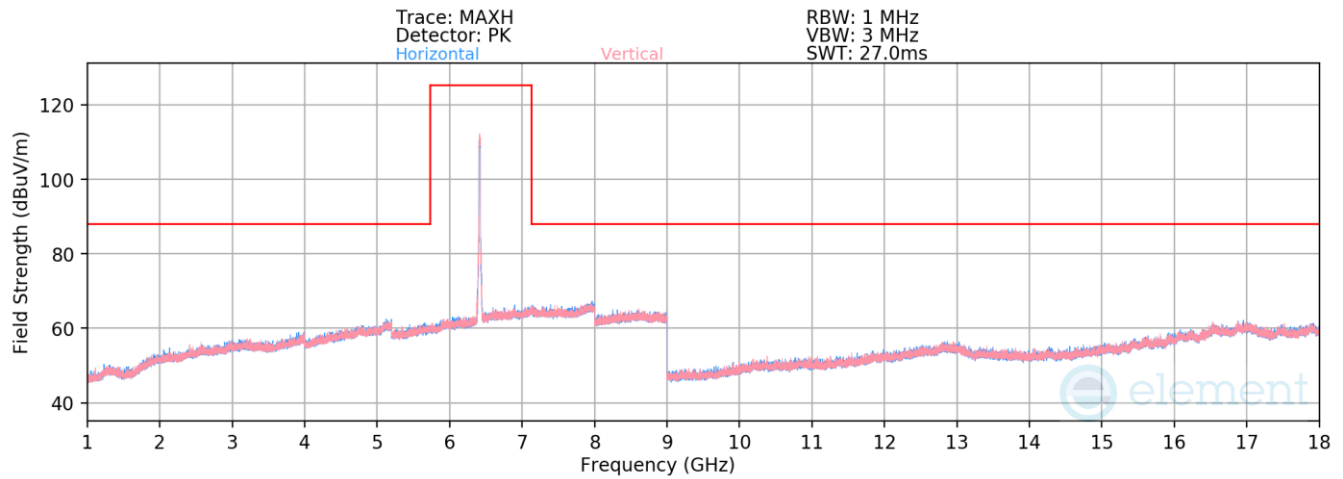

Plot 7-1394. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 93 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12830.00	Average	V	-	-	-85.63	22.11	43.48	68.23	-24.75
12830.00	Peak	V	-	-	-74.26	22.11	54.84	88.23	-33.39

Table 7-242. Radiated Spurious Emission Measurements CDD Diversity – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 447 of 635

V 11.0 05/2025

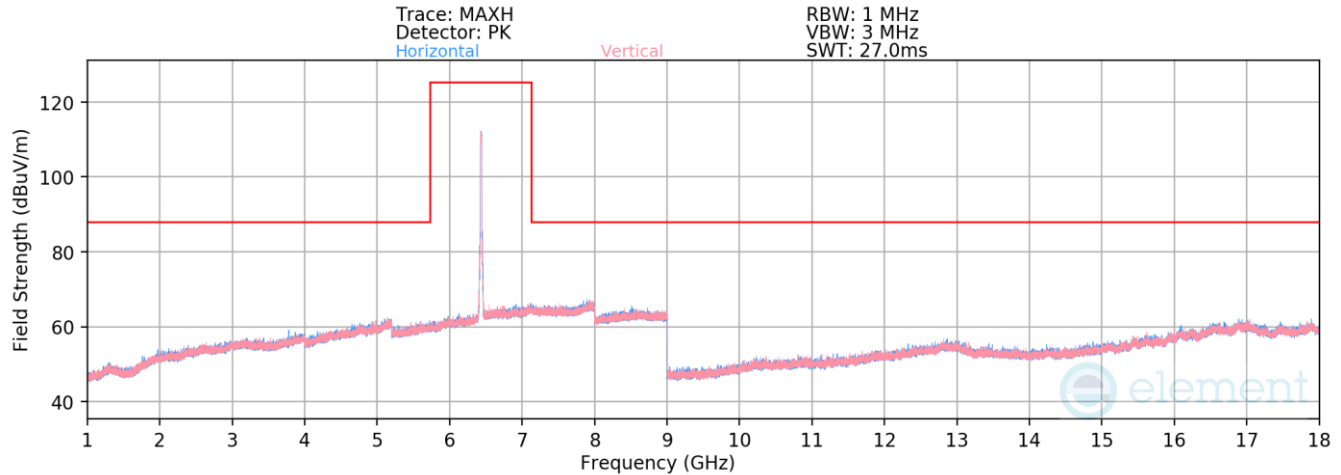

Plot 7-1395. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 97 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435MHz
Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12870.00	Average	V	-	-	-85.15	21.87	43.72	68.23	-24.51
12870.00	Peak	V	-	-	-73.39	21.87	55.48	88.23	-32.75


Table 7-243. Radiated Spurious Emission Measurements CDD Diversity – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 448 of 635

V 11.0 05/2025

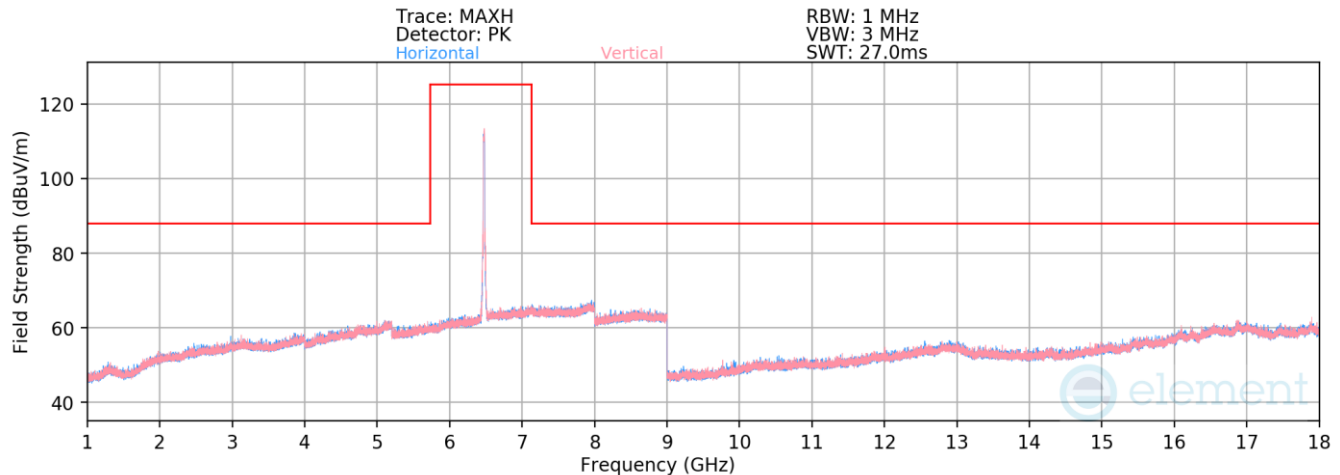

Plot 7-1396. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 105 – RU242)

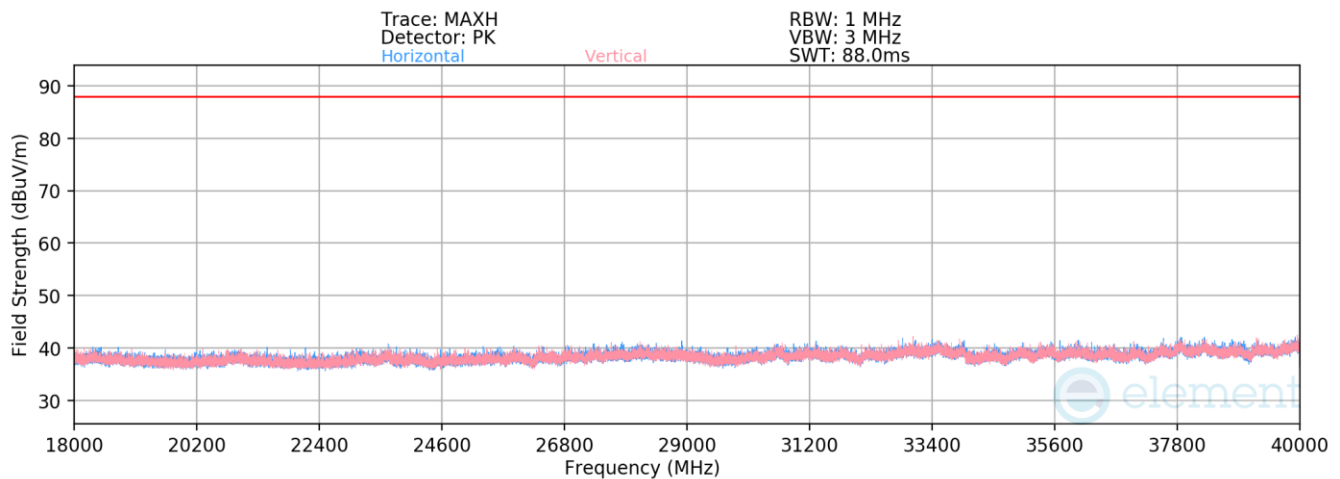

Plot 7-1397. Radiated Spurious Emissions 18-40GHz CDD Diversity (802.11be – Ch. 105 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6475MHz
Channel: 105


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12950.00	Average	V	-	-	-84.64	21.80	44.17	68.23	-24.06
12950.00	Peak	V	-	-	-73.99	21.80	54.81	88.23	-33.42

Table 7-244. Radiated Spurious Emission Measurements CDD Diversity – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 449 of 635

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

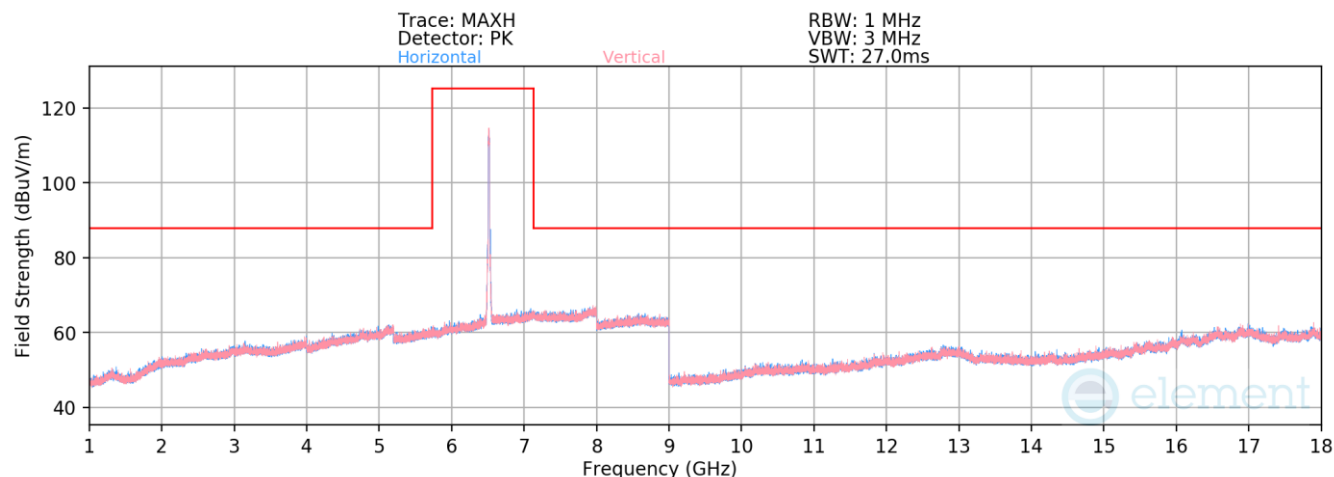

Plot 7-1398. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 113 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6515MHz
Channel: 113


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13030.00	Average	H	-	-	-85.54	22.02	43.48	68.23	-24.75
13030.00	Peak	H	-	-	-74.32	22.02	54.70	88.23	-33.53

Table 7-245. Radiated Spurious Emission Measurements CDD Diversity – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 450 of 635

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

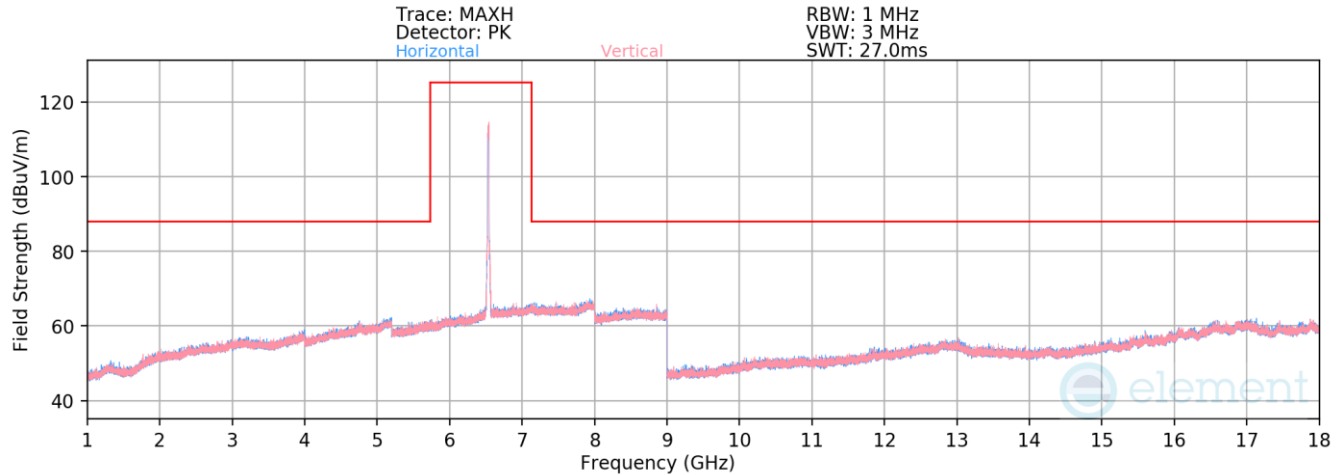

Plot 7-1399. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 117 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535MHz
Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13070.00	Average	V	-	-	-85.51	21.74	43.22	68.23	-25.01
13070.00	Peak	V	-	-	-74.17	21.74	54.57	88.23	-33.66


Table 7-246. Radiated Spurious Emission Measurements CDD Diversity – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 451 of 635

V 11.0 05/2025

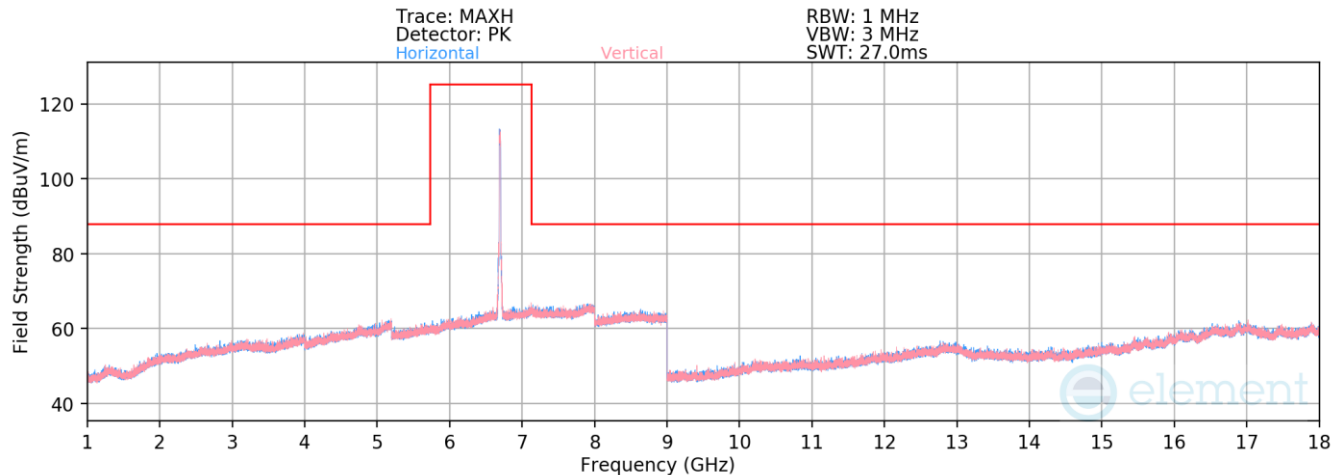

Plot 7-1400. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 149 – RU242)

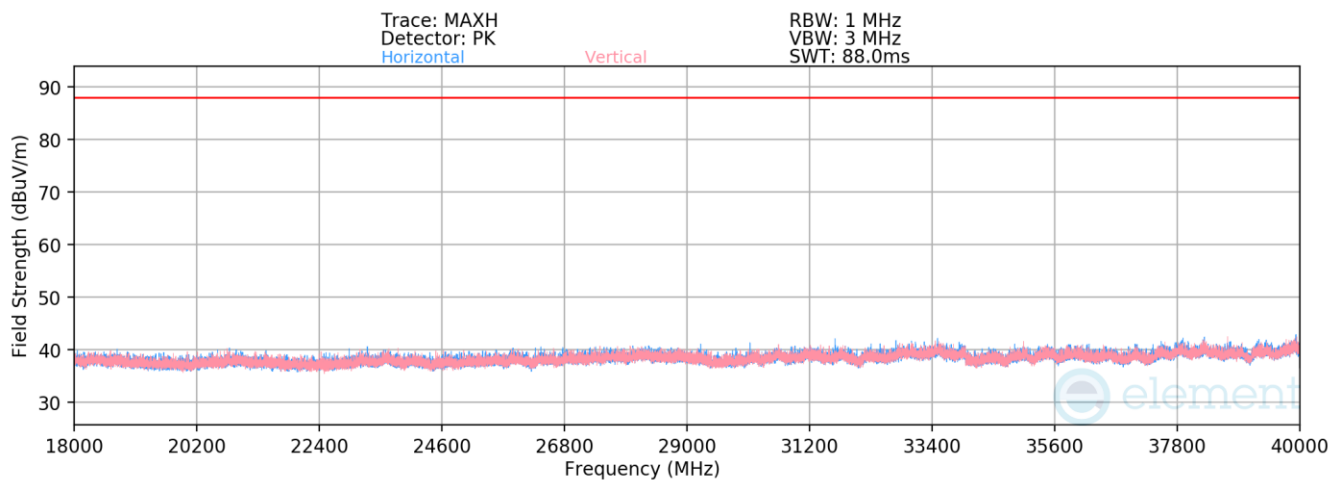

Plot 7-1401. Radiated Spurious Emissions 18-40GHz CDD Diversity (802.11be – Ch. 149 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6695MHz
Channel: 149


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 13390.00	Average	V	-	-	-85.75	21.80	43.05	53.98	-10.93
* 13390.00	Peak	V	-	-	-73.48	21.80	55.32	73.98	-18.66

Table 7-247. Radiated Spurious Emission Measurements CDD Diversity – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 452 of 635

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

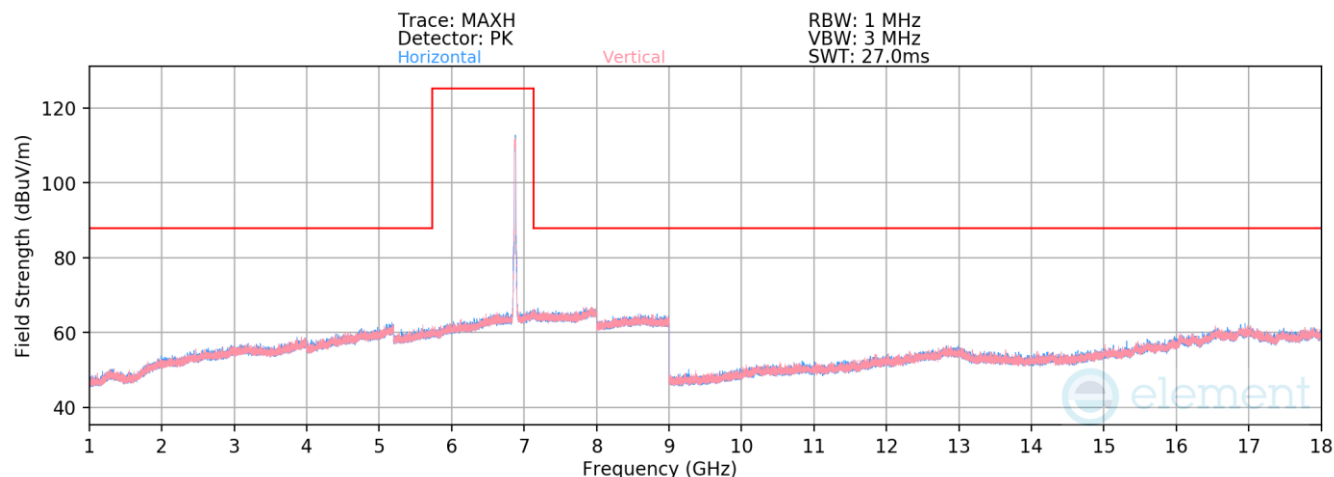

Plot 7-1402. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 185 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6875MHz
Channel: 185


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13750.00	Average	H	-	-	-86.06	21.88	42.82	68.23	-25.41
13750.00	Peak	H	-	-	-74.52	21.88	54.36	88.23	-33.87

Table 7-248. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 453 of 635

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

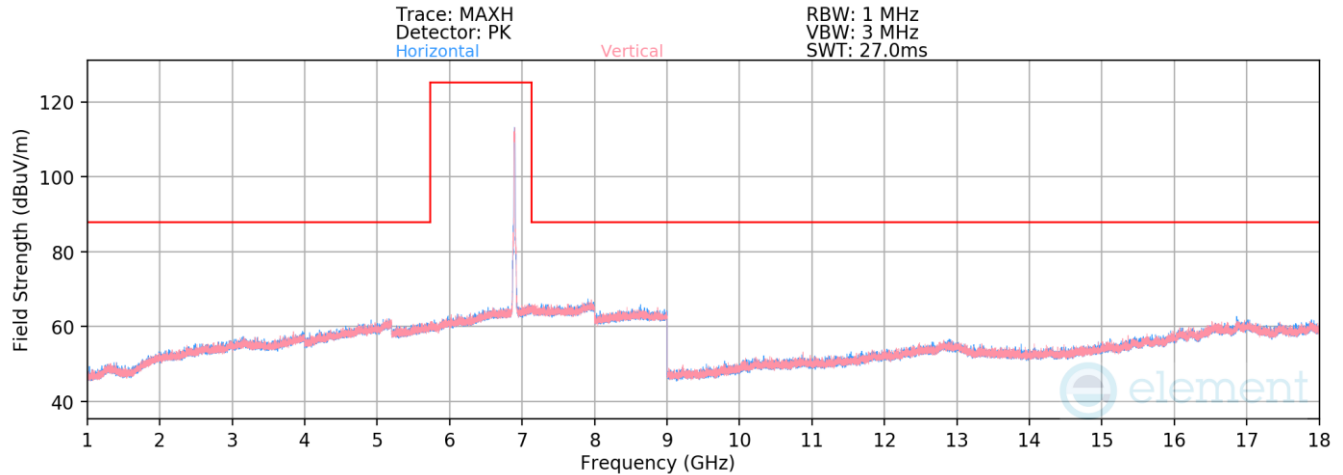

Plot 7-1403. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 189 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895MHz
Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13790.00	Average	V	-	-	-85.28	21.88	43.61	68.23	-24.62
13790.00	Peak	V	-	-	-74.67	21.88	54.21	88.23	-34.02

Table 7-249. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-25-R2.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 454 of 635

V 11.0 05/2025