


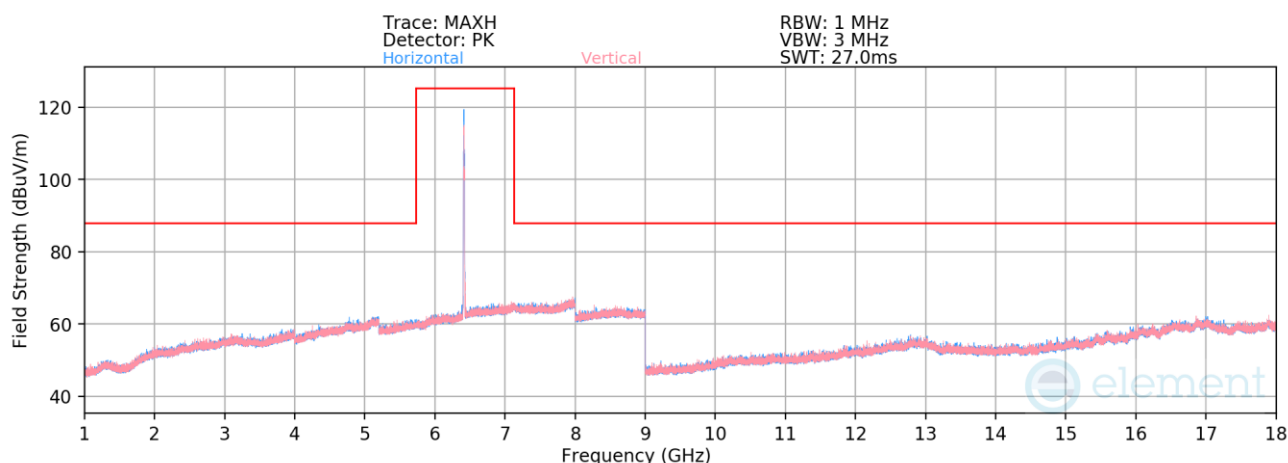

Plot 7-787. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 93 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Average	H	-	-	-86.39	22.11	42.71	68.23	-25.52
12830.00	Peak	H	-	-	-74.42	22.11	54.69	88.23	-33.54

Table 7-107. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 246 of 464

V 11.0 05/2025

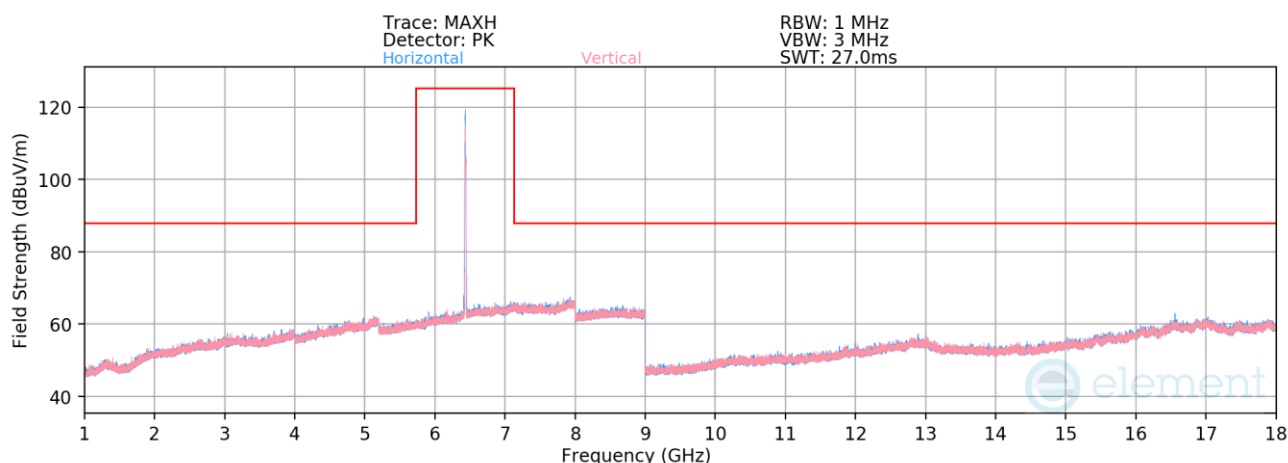

Plot 7-788. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 97 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435MHz
Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12870.00	Average	H	-	-	-84.99	22.02	44.03	68.23	-24.20
12870.00	Peak	H	-	-	-73.74	22.02	55.28	88.23	-32.95


Table 7-108. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 247 of 464

V 11.0 05/2025

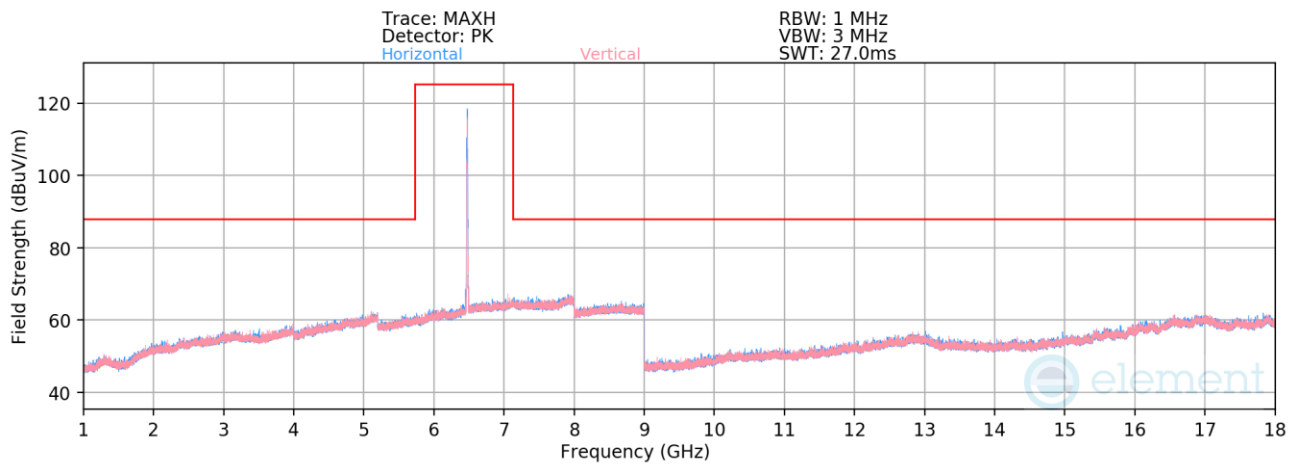

Plot 7-789. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 105 – RU26)

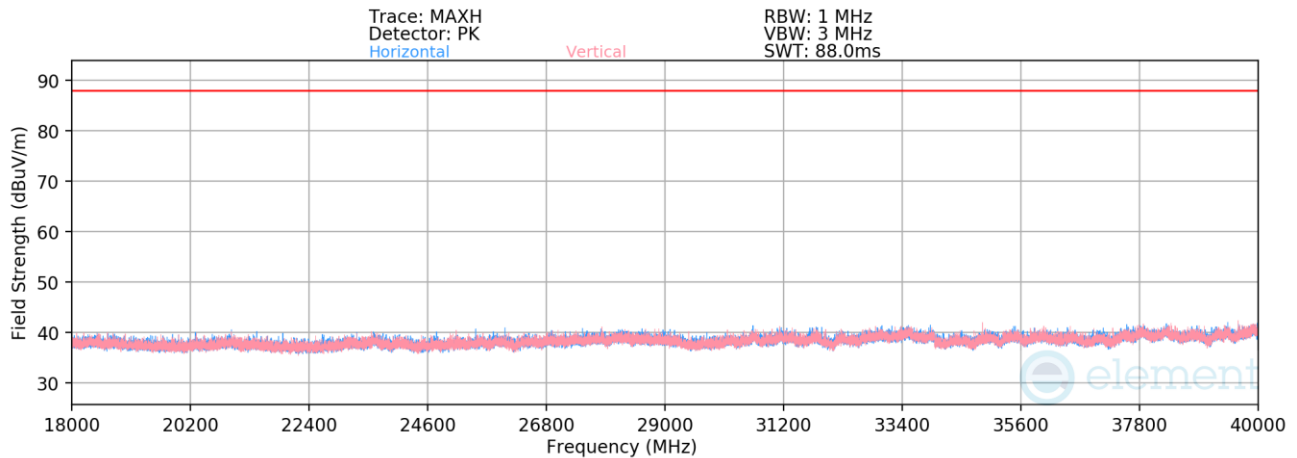

Plot 7-790. Radiated Spurious Emissions 18-40GHz SDM Primary (802.11be – Ch. 105 – RU26)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6475MHz
Channel:	105


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12950.00	Average	H	-	-	-85.79	21.88	43.09	68.23	-25.14
12950.00	Peak	H	-	-	-73.94	21.88	54.94	88.23	-33.29

Table 7-109. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 248 of 464

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

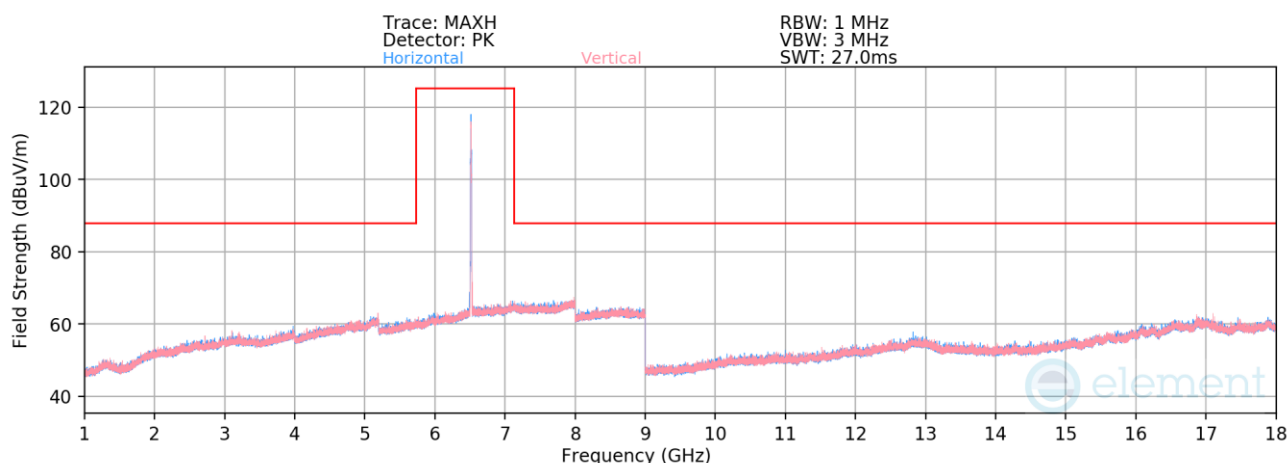

Plot 7-791. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 113 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6515MHz
Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13030.00	Average	H	-	-	-85.45	22.11	43.66	68.23	-24.57
13030.00	Peak	H	-	-	-74.43	22.11	54.68	88.23	-33.55

Table 7-110. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 249 of 464

V 11.0 05/2025

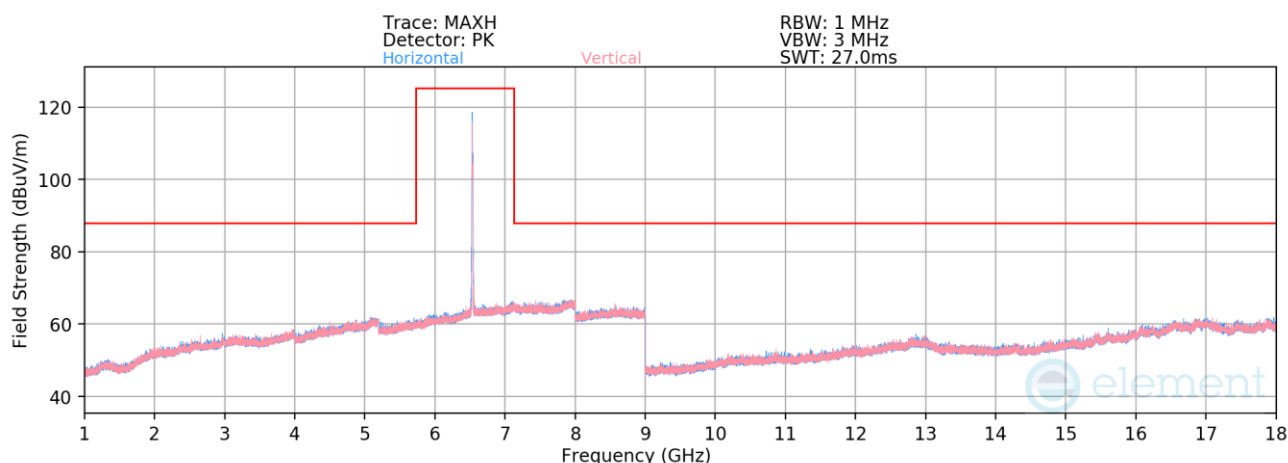

Plot 7-792. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 117 – RU52)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535MHz
Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13070.00	Average	H	-	-	-85.38	22.11	43.74	68.23	-24.49
13070.00	Peak	H	-	-	-74.04	22.11	55.07	88.23	-33.16


Table 7-111. Radiated Spurious Emission Measurements SDM Primary – RU52

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 250 of 464

V 11.0 05/2025

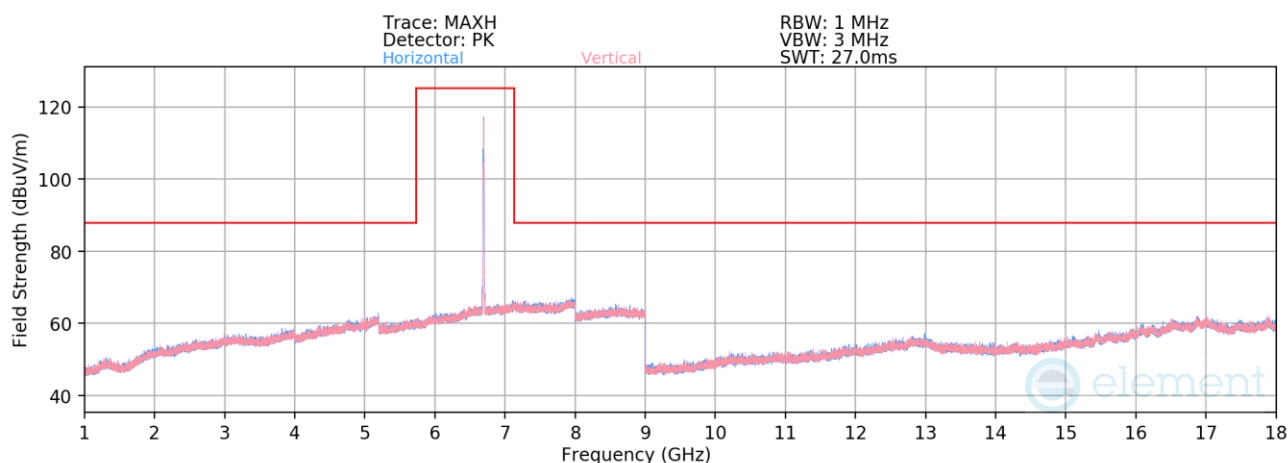

Plot 7-793. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 149 – RU52)

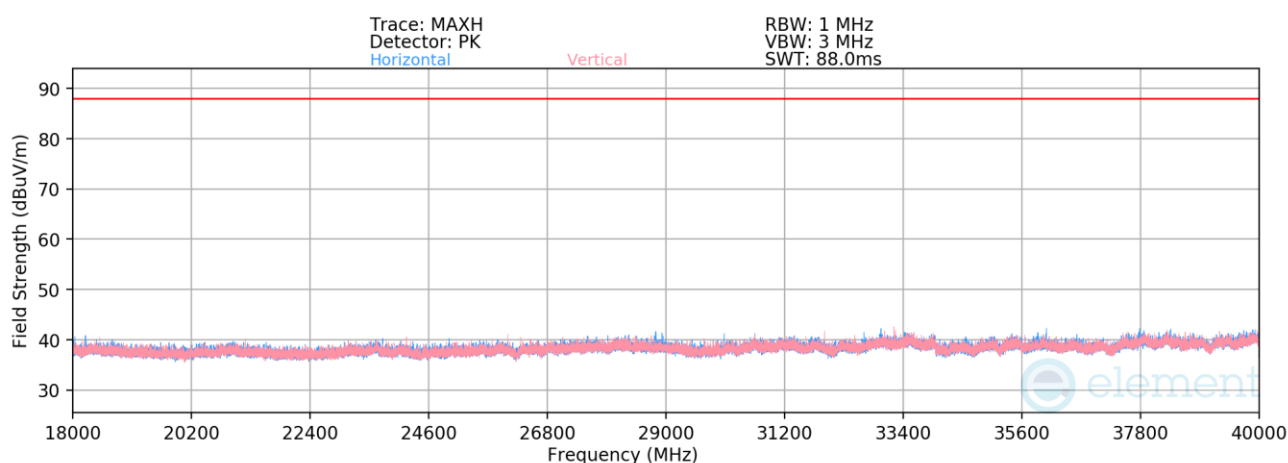

Plot 7-794. Radiated Spurious Emissions 18-40GHz SDM Primary (802.11be – Ch. 149 – RU52)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6695MHz
Channel:	149


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 13390.00	Average	H	-	-	-85.34	22.01	43.67	68.23	-24.56
* 13390.00	Peak	H	-	-	-73.80	22.01	55.21	73.98	-18.77

Table 7-112. Radiated Spurious Emission Measurements SDM Primary – RU52

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 251 of 464

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

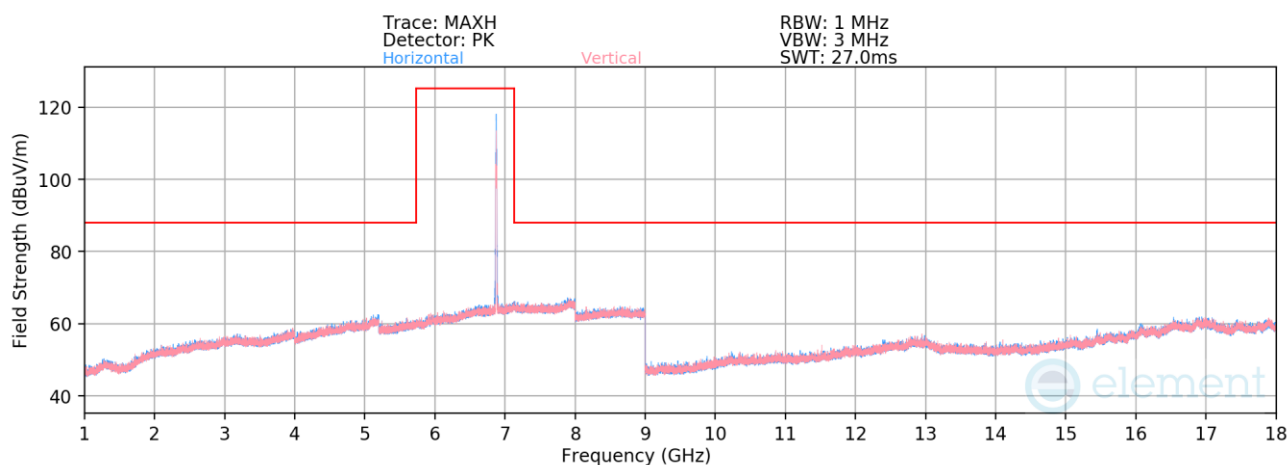

Plot 7-795. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 185 – RU52)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6875MHz
Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13750.00	Average	H	-	-	-85.78	21.88	43.11	68.23	-25.12
13750.00	Peak	H	-	-	-74.98	21.88	53.91	88.23	-34.32

Table 7-113. Radiated Spurious Emission Measurements SDM Primary – RU52

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 252 of 464

V 11.0 05/2025

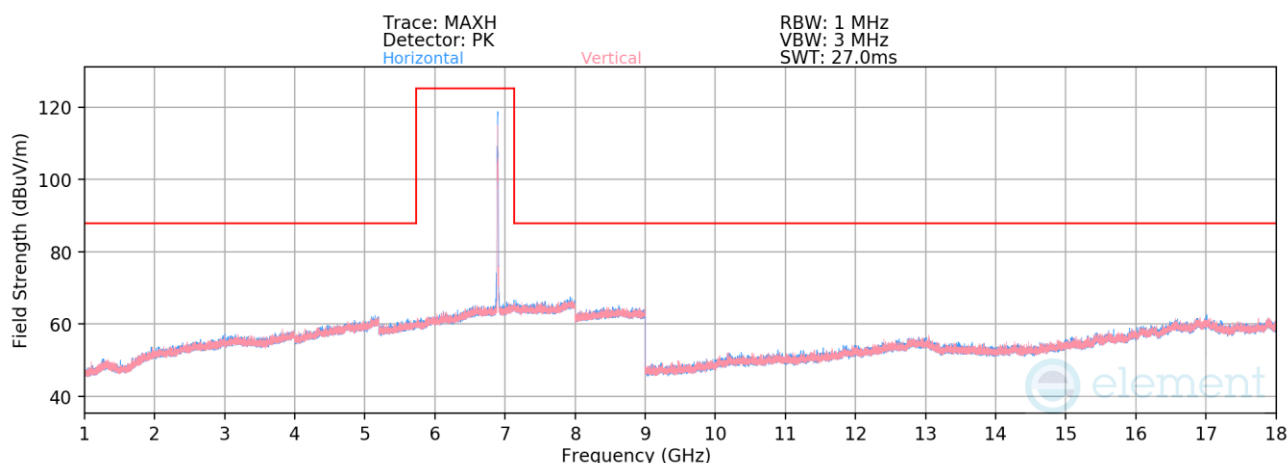

Plot 7-796. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 189 – RU52)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895MHz
Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13790.00	Average	V	-	-	-86.41	21.94	42.52	68.23	-25.71
13790.00	Peak	V	-	-	-74.77	21.94	54.16	88.23	-34.07


Table 7-114. Radiated Spurious Emission Measurements SDM Primary – RU52

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 253 of 464

V 11.0 05/2025

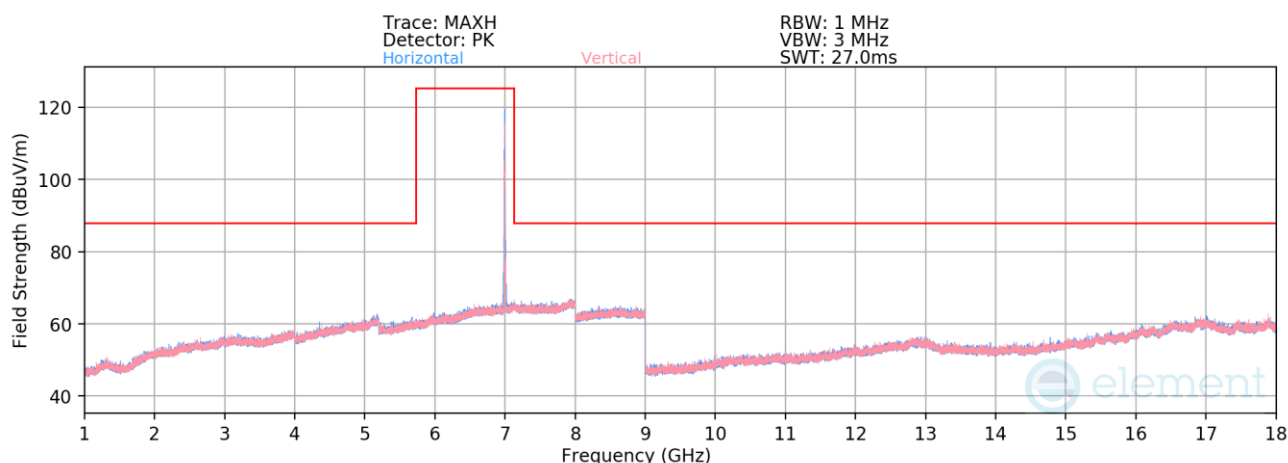

Plot 7-797. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 209 – RU52)

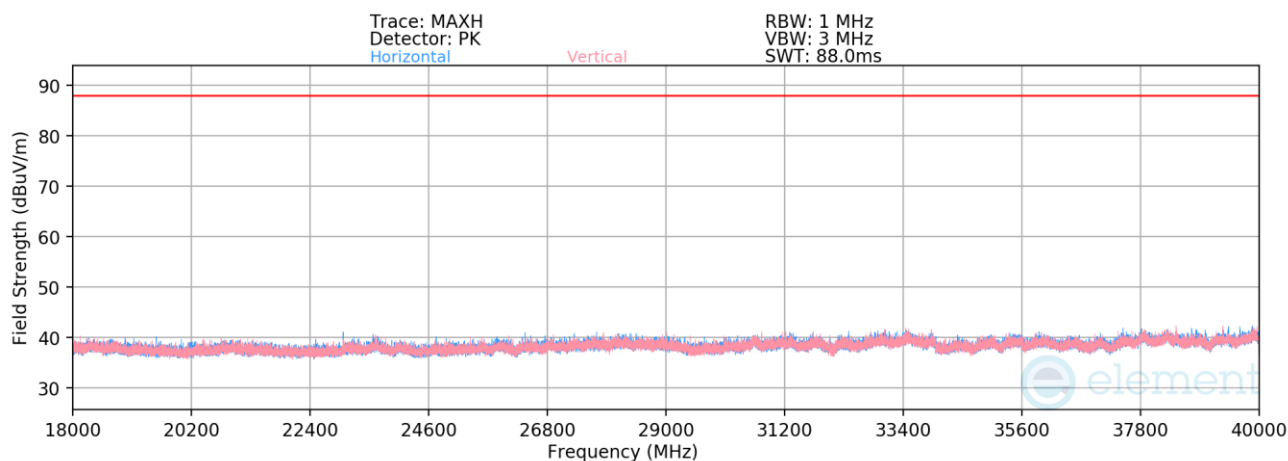

Plot 7-798. Radiated Spurious Emissions 18-40GHz SDM Primary (802.11be – Ch. 209 – RU52)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6995MHz
Channel:	209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Average	H	-	-	-85.72	22.12	43.40	68.23	-24.83
13990.00	Peak	H	-	-	-75.40	22.12	53.72	88.23	-34.51

Table 7-115. Radiated Spurious Emission Measurements SDM Primary – RU52

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 254 of 464

V 11.0 05/2025

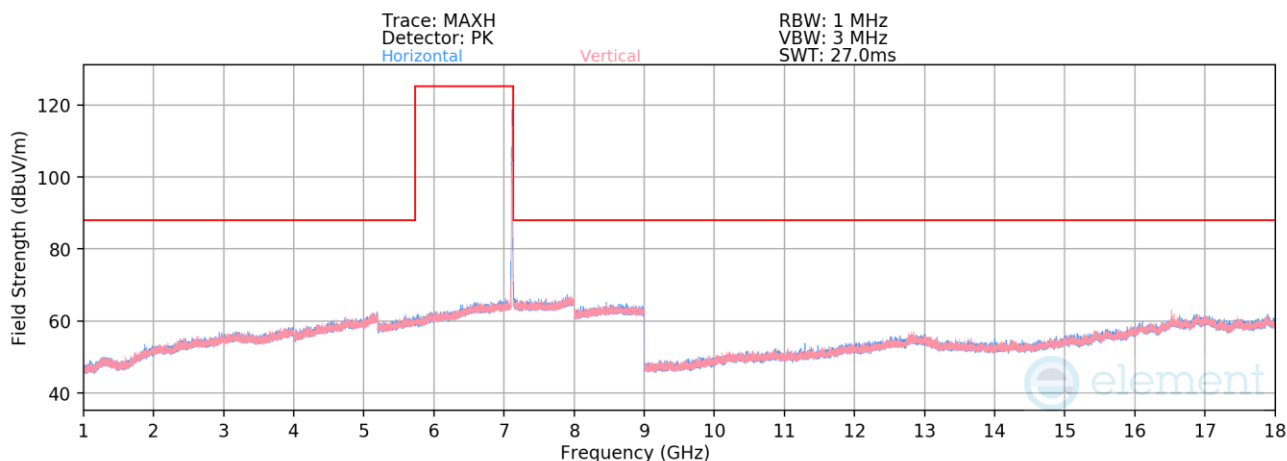

Plot 7-799. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 33 – RU52)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
14190.00	Peak	V	-	-	-73.79	21.93	55.14	88.23	-33.09
14190.00	Average	V	-	-	-85.46	21.93	43.48	68.23	-24.75

Table 7-116. Radiated Spurious Emission Measurements SDM Primary – RU52

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 255 of 464

V 11.0 05/2025

RU242

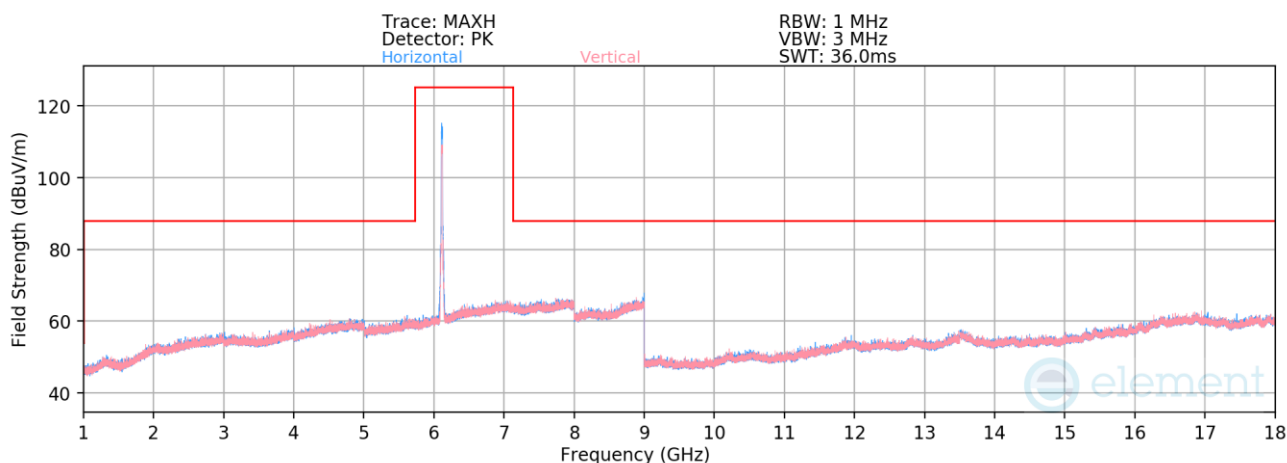

Plot 7-800. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 33 – RU242)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6115MHz
Channel:	33

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 12230.00	Average	V	-	-	-85.05	20.79	42.74	53.98	-11.24
* 12230.00	Peak	V	-	-	-73.94	20.79	53.85	73.98	-20.13


Table 7-117. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 256 of 464

V 11.0 05/2025

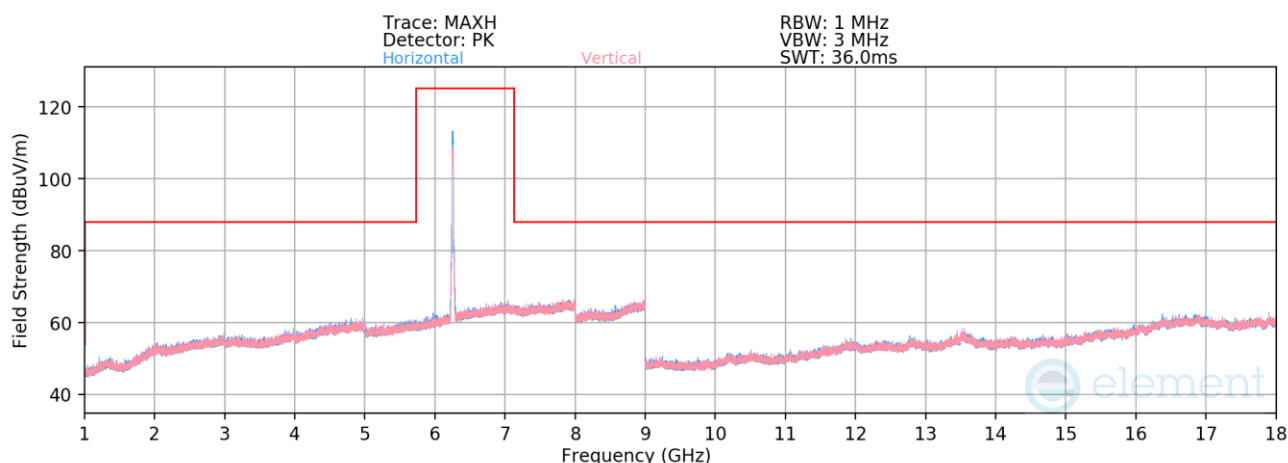

Plot 7-801. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 61 – RU242)

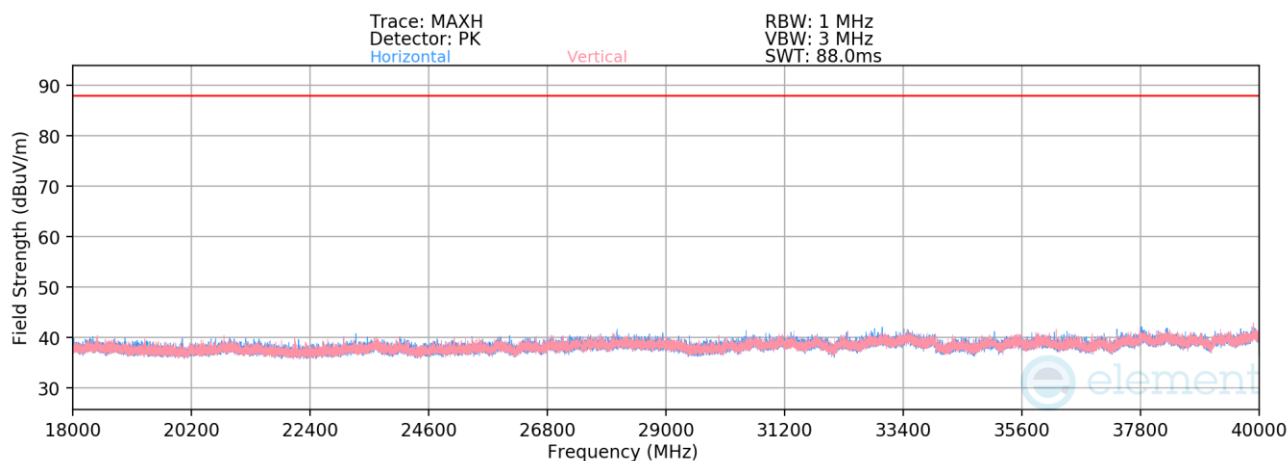

Plot 7-802. Radiated Spurious Emissions 18-40GHz SDM Primary (802.11be – Ch. 61 – RU242)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6255MHz
Channel:	61

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 12510.00	Average	V	-	-	-84.90	21.32	43.42	53.98	-10.56
* 12510.00	Peak	V	-	-	-73.00	21.32	55.32	73.98	-18.66

Table 7-118. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 257 of 464

V 11.0 05/2025

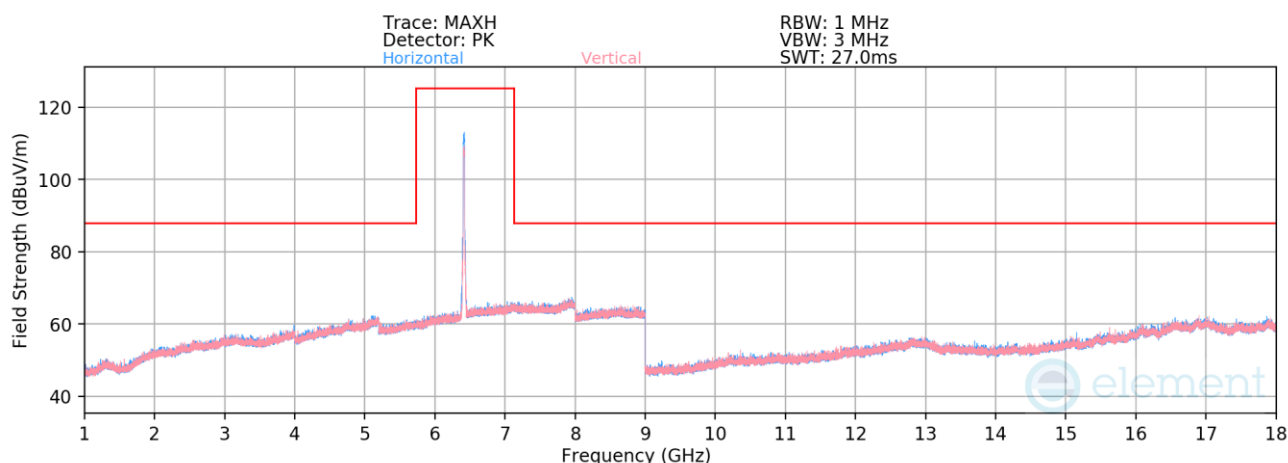

Plot 7-803. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 93 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Average	H	-	-	-85.75	22.11	43.35	68.23	-24.88
12830.00	Peak	H	-	-	-74.92	22.11	54.18	88.23	-34.05

Table 7-119. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 258 of 464

V 11.0 05/2025

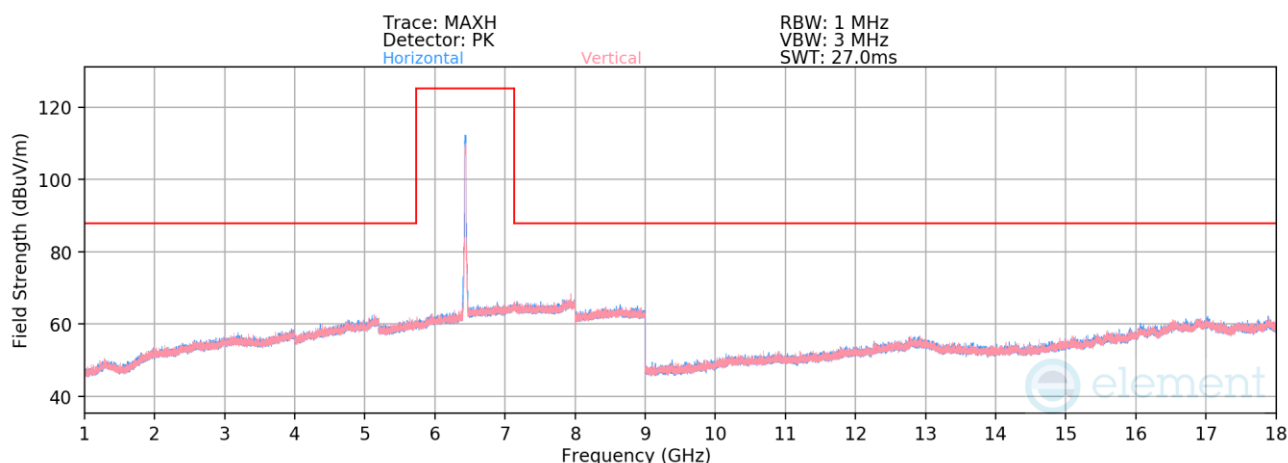

Plot 7-804. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 97 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435MHz
Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12870.00	Average	H	-	-	-84.87	21.97	44.09	68.23	-24.14
12870.00	Peak	H	-	-	-73.24	21.97	55.73	88.23	-32.50


Table 7-120. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 259 of 464

V 11.0 05/2025

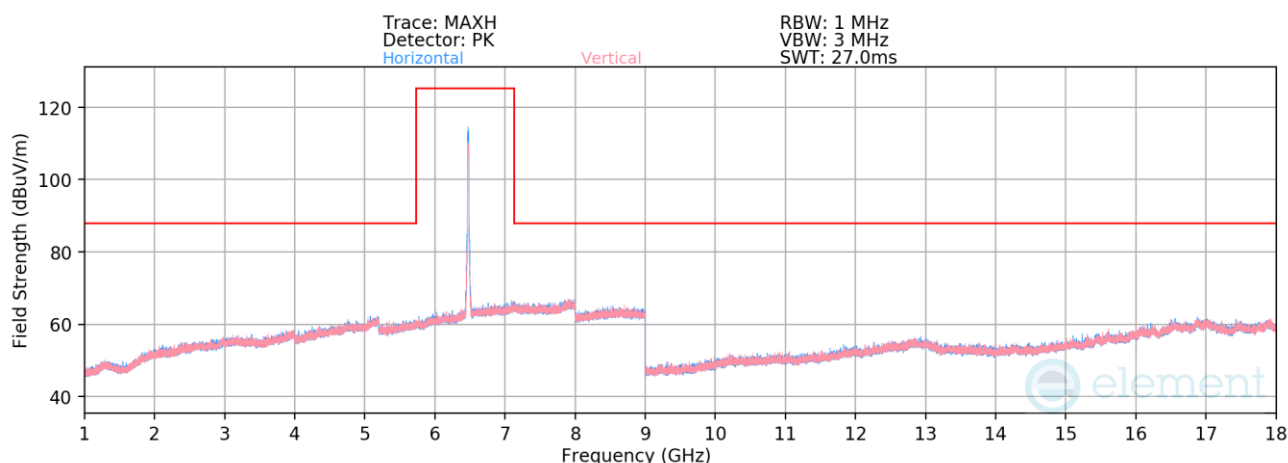

Plot 7-805. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 105 – RU242)

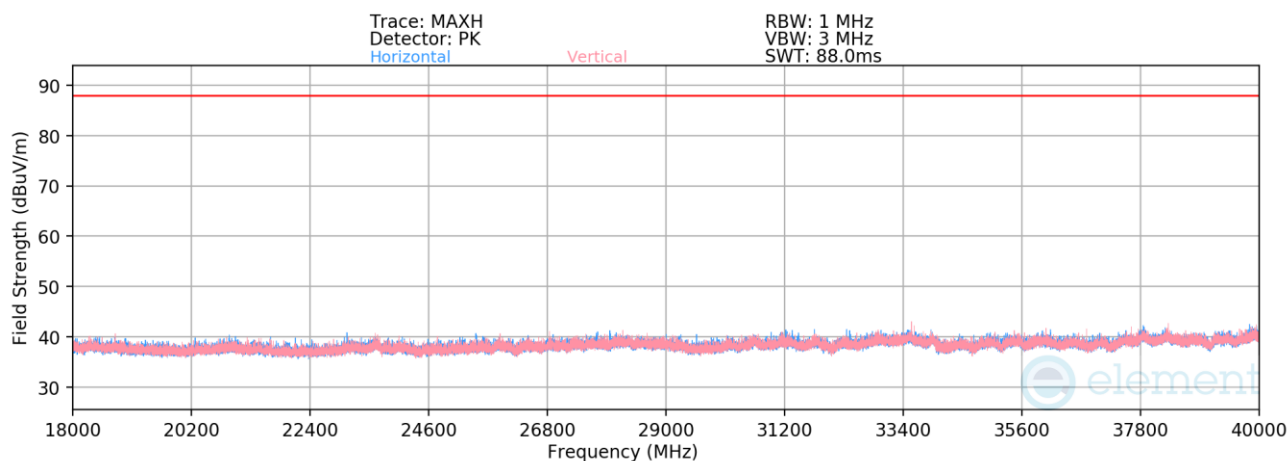

Plot 7-806. Radiated Spurious Emissions 18-40GHz SDM Primary (802.11be – Ch. 105 – RU242)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6475MHz
Channel:	105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12950.00	Average	H	-	-	-85.07	21.75	43.67	68.23	-24.56
12950.00	Peak	H	-	-	-74.98	21.75	53.77	88.23	-34.46

Table 7-121. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 260 of 464

V 11.0 05/2025

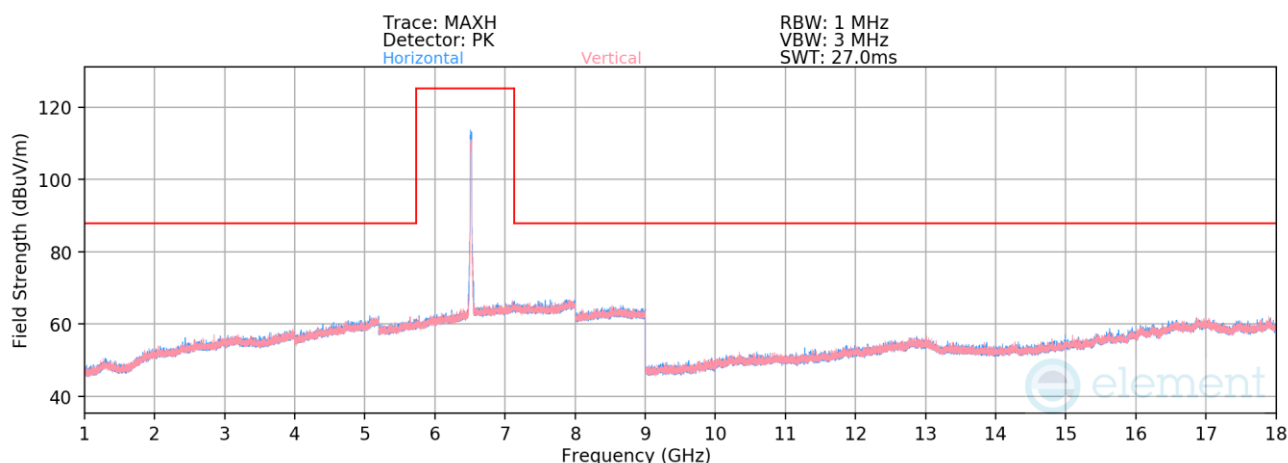

Plot 7-807. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 113 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6515MHz
Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13030.00	Average	V	-	-	-85.25	22.12	43.87	68.23	-24.36
13030.00	Peak	V	-	-	-74.39	22.12	54.73	88.23	-33.50

Table 7-122. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 261 of 464

V 11.0 05/2025

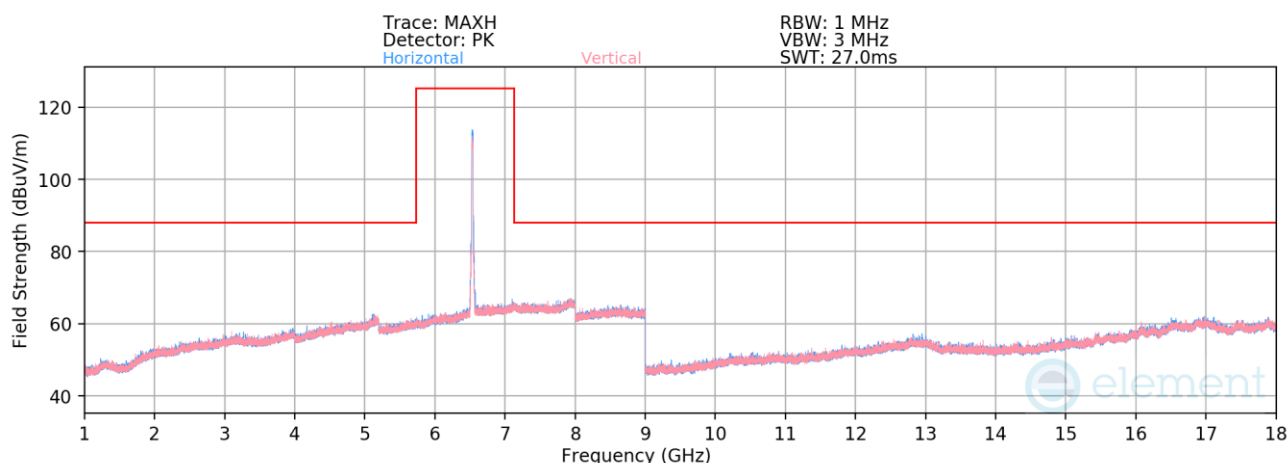

Plot 7-808. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 117 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535MHz
Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13070.00	Average	V	-	-	-85.61	22.11	43.50	68.23	-24.73
13070.00	Peak	V	-	-	-73.64	22.11	55.47	88.23	-32.76


Table 7-123. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 262 of 464

V 11.0 05/2025

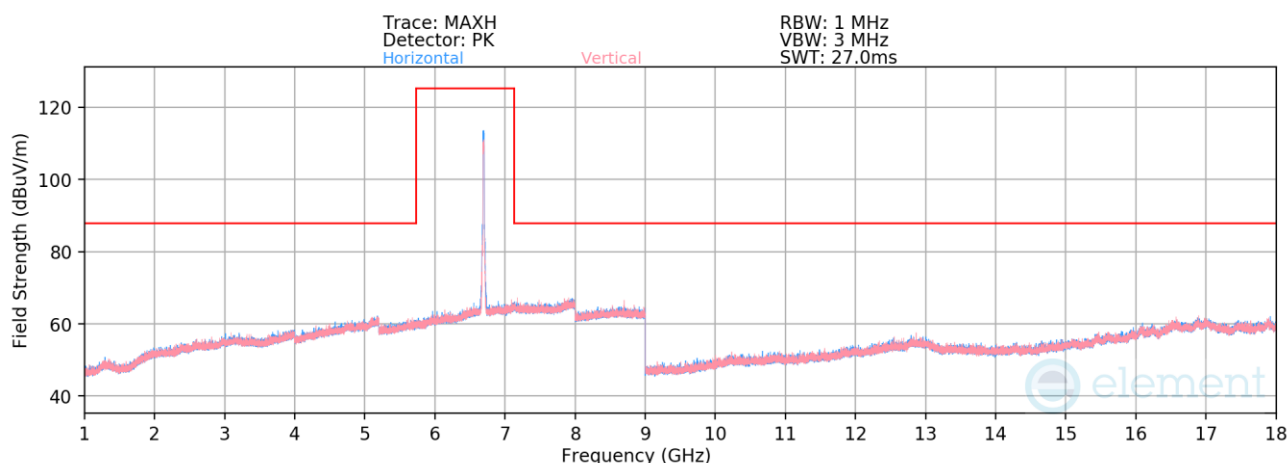

Plot 7-809. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 149 – RU242)

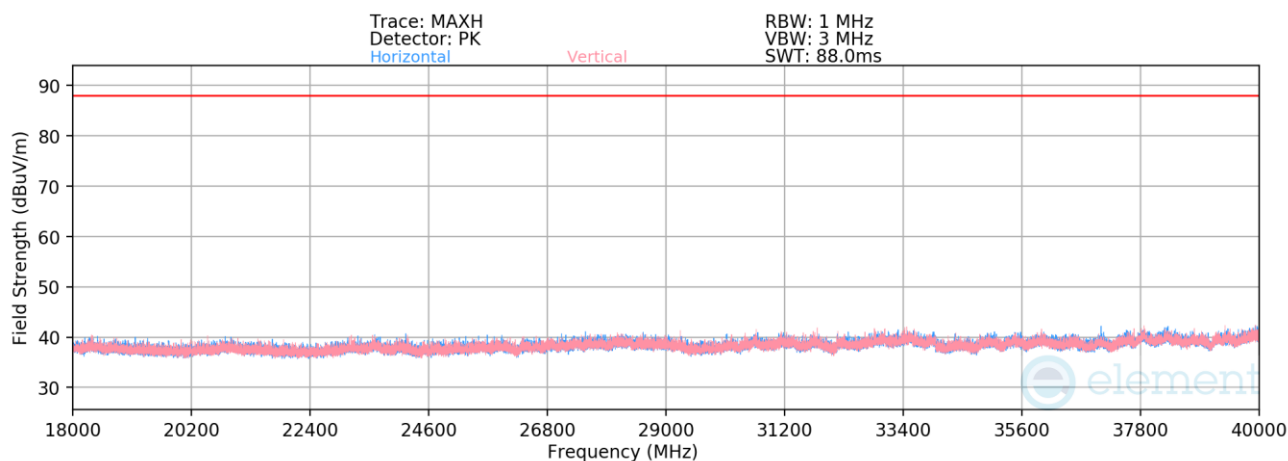

Plot 7-810. Radiated Spurious Emissions 18-40GHz SDM Primary (802.11be – Ch. 149 – RU242)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6695MHz
Channel:	149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 13390.00	Average	H	-	-	-85.99	21.80	42.81	53.98	-11.17
* 13390.00	Peak	H	-	-	-75.03	21.80	53.77	73.98	-20.21

Table 7-124. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 263 of 464

V 11.0 05/2025

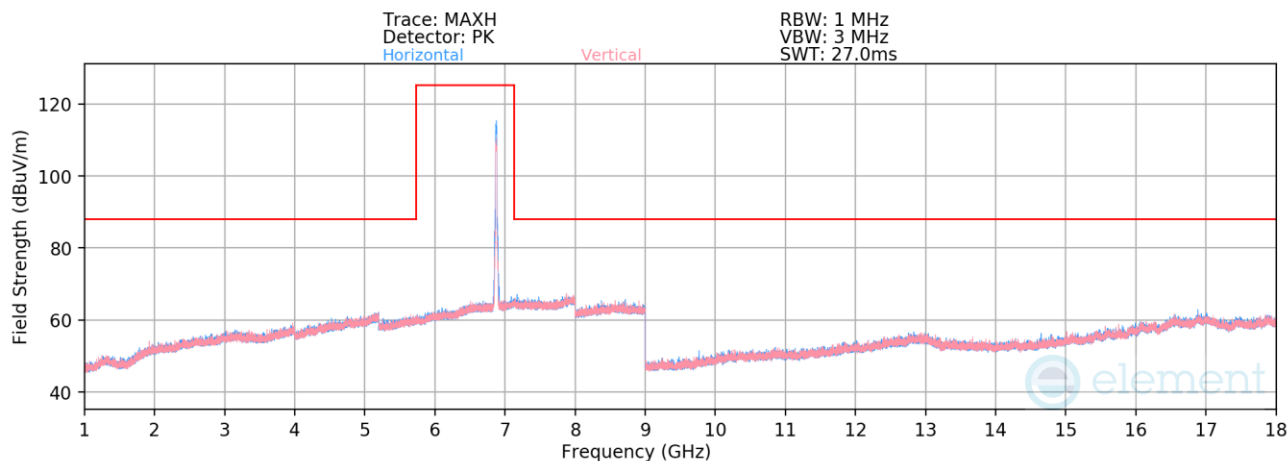

Plot 7-811. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 185 – RU242)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6875MHz
Channel:	185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13750.00	Average	V	-	-	-85.56	21.78	43.22	68.23	-25.01
13750.00	Peak	V	-	-	-75.05	21.78	53.73	88.23	-34.50

Table 7-125. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 264 of 464

V 11.0 05/2025

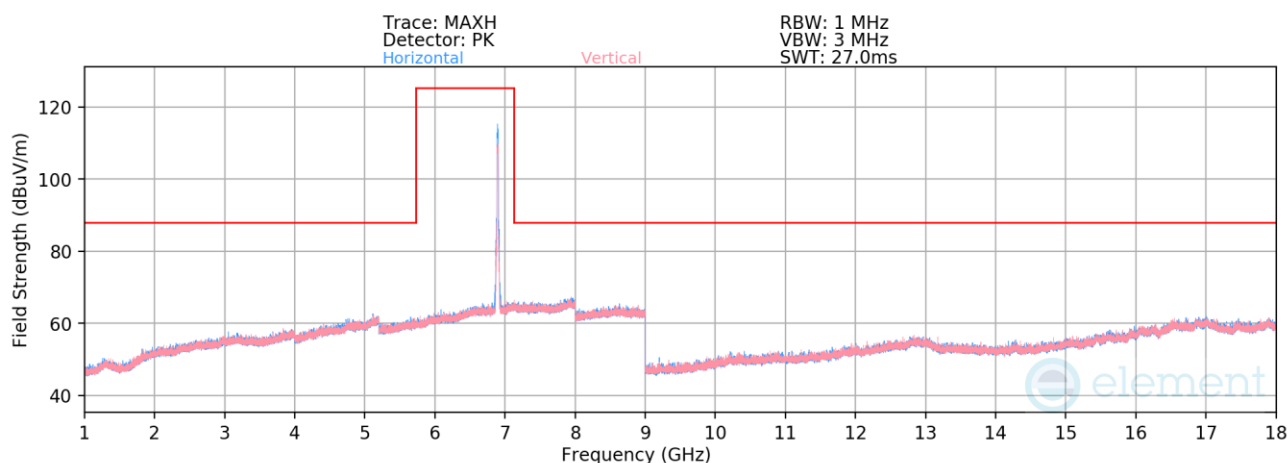

Plot 7-812. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 189 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895MHz
Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13790.00	Average	H	-	-	-85.63	21.94	43.30	68.23	-24.93
13790.00	Peak	H	-	-	-74.50	21.94	54.44	88.23	-33.79


Table 7-126. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 265 of 464

V 11.0 05/2025

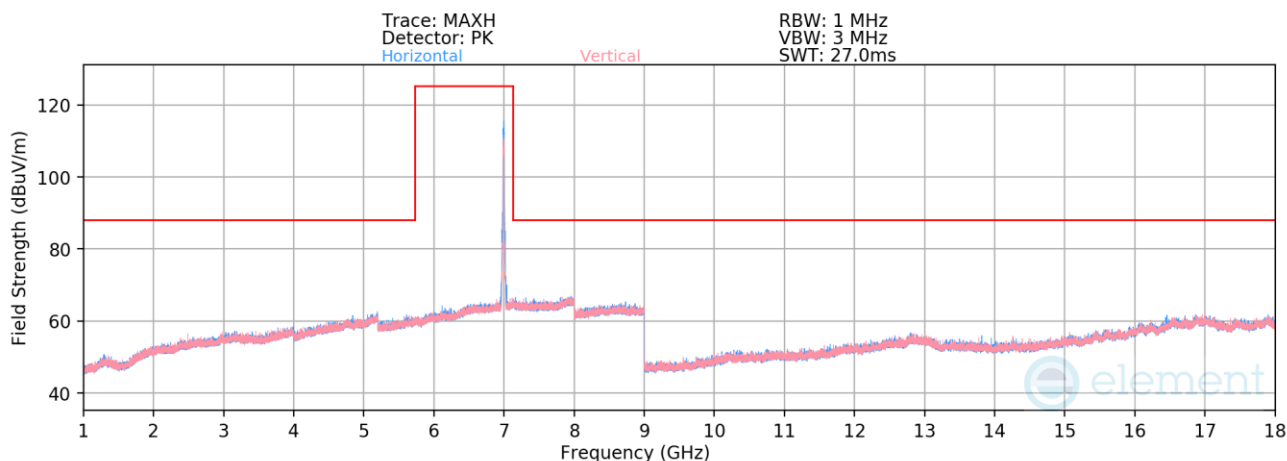

Plot 7-813. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 209 – RU242)

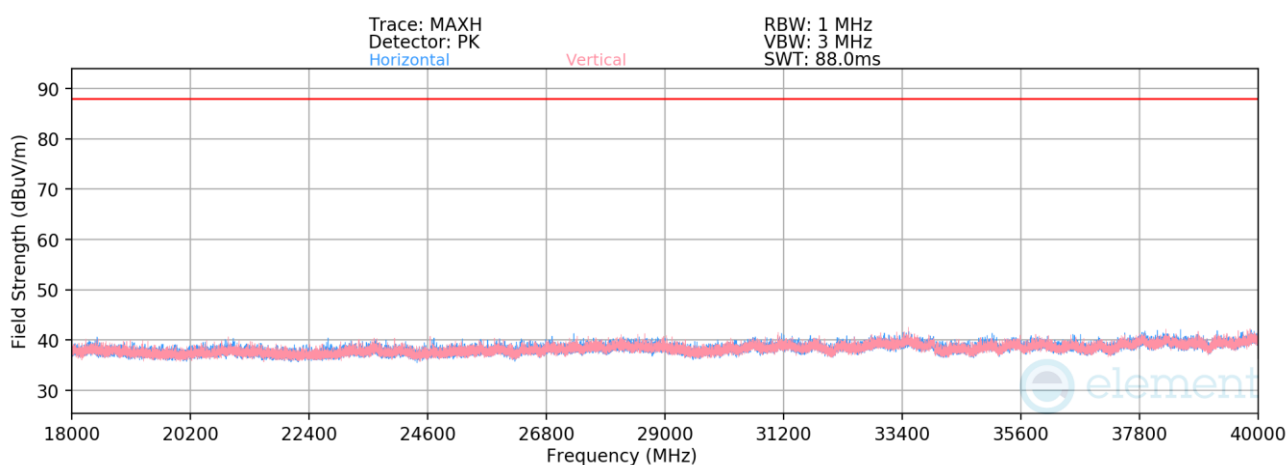

Plot 7-814. Radiated Spurious Emissions 18-40GHz SDM Primary (802.11be – Ch. 209 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6995MHz
Channel: 209


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Average	H	-	-	-86.25	22.25	43.00	68.23	-25.23
13990.00	Peak	H	-	-	-74.42	22.25	54.83	88.23	-33.40

Table 7-127. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 266 of 464

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

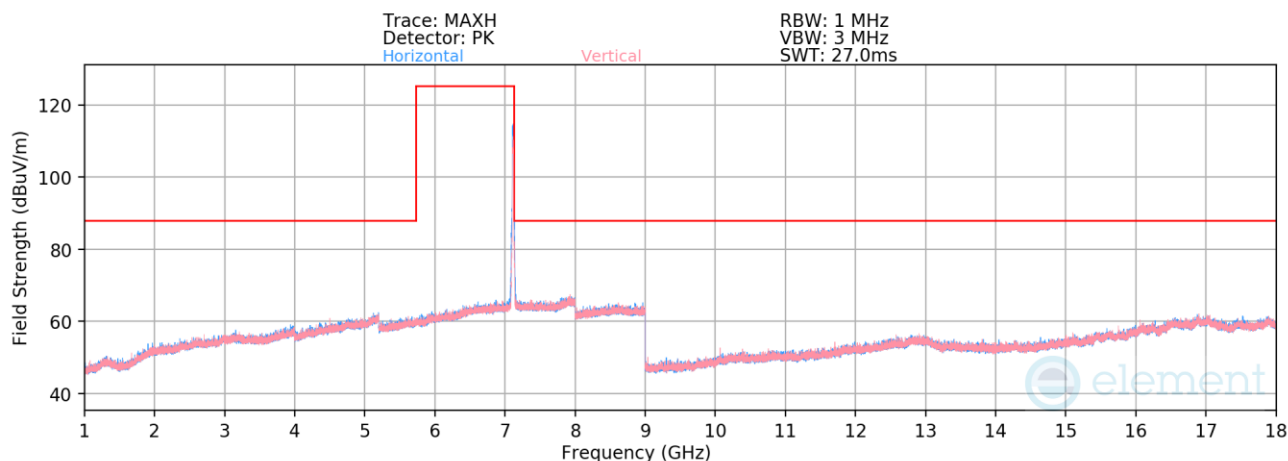

Plot 7-815. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 233 – RU242)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	7115MHz
Channel:	233

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
14230.00	Average	H	-	-	-86.37	22.92	43.55	68.23	-24.68
14230.00	Peak	H	-	-	-74.51	22.92	55.41	88.23	-32.82


Table 7-128. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 267 of 464

V 11.0 05/2025

7.7.2 SDM Diversity Radiated Spurious Emission

RU26/52

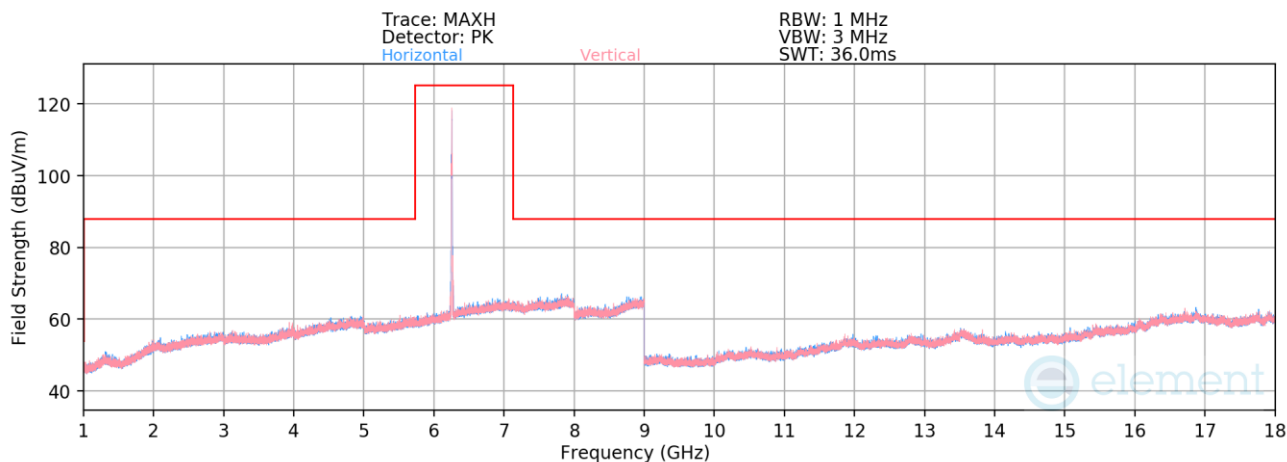

Plot 7-816. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 33 – RU26)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6115MHz
Channel:	33

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12230.00	Average	V	-	-	-84.68	20.93	43.25	53.98	-10.73
* 12230.00	Peak	V	-	-	-73.56	20.93	54.38	73.98	-19.60


Table 7-129. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 268 of 464

V 11.0 05/2025

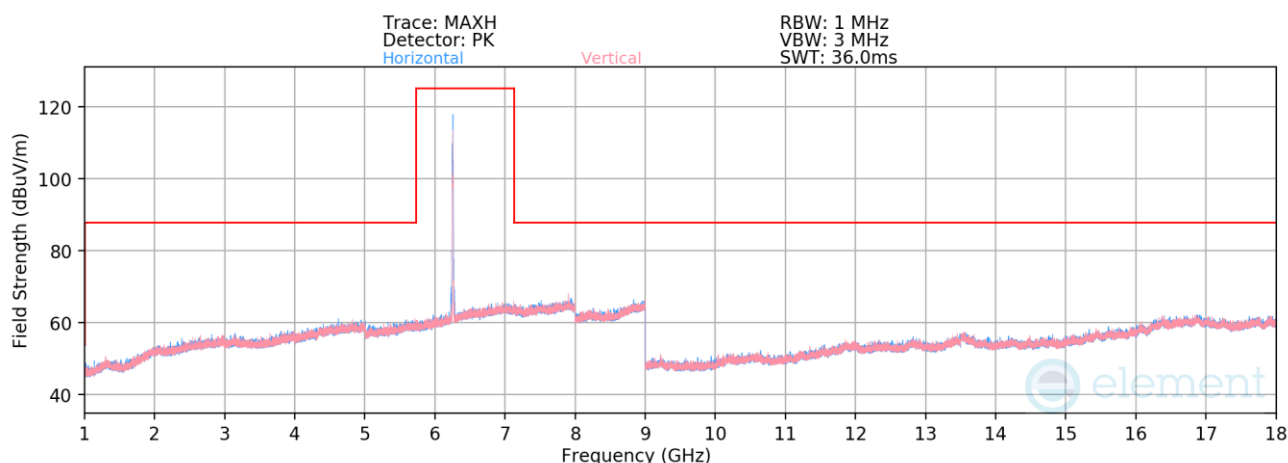

Plot 7-817. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 61 – RU26)

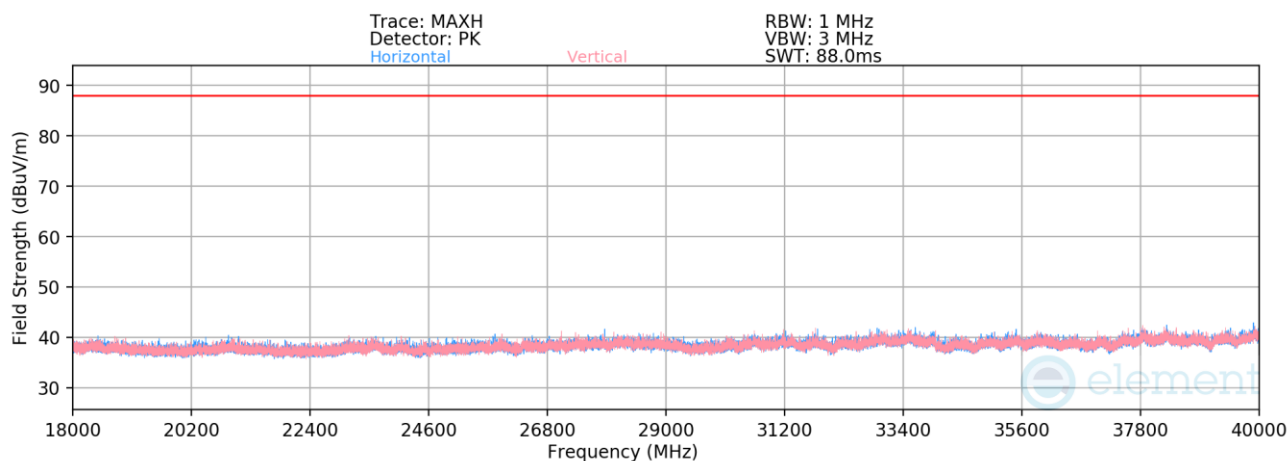

Plot 7-818. Radiated Spurious Emissions 18-40GHz SDM Diversity (802.11be – Ch. 61 – RU26)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6255MHz
Channel:	61

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 12510.00	Average	V	-	-	-85.30	21.29	42.99	53.98	-10.99
* 12510.00	Peak	V	-	-	-73.51	21.29	54.78	73.98	-19.20

Table 7-130. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 269 of 464

V 11.0 05/2025

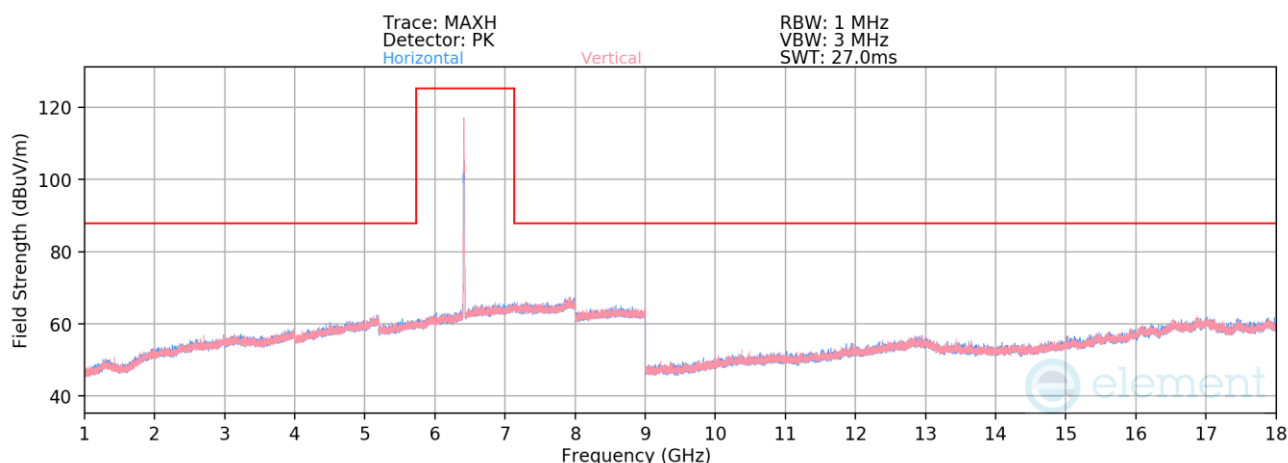

Plot 7-819. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 93 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Average	V	-	-	-86.06	22.11	43.05	68.23	-25.18
12830.00	Peak	V	-	-	-72.95	22.11	56.16	88.23	-32.07

Table 7-131. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 270 of 464

V 11.0 05/2025

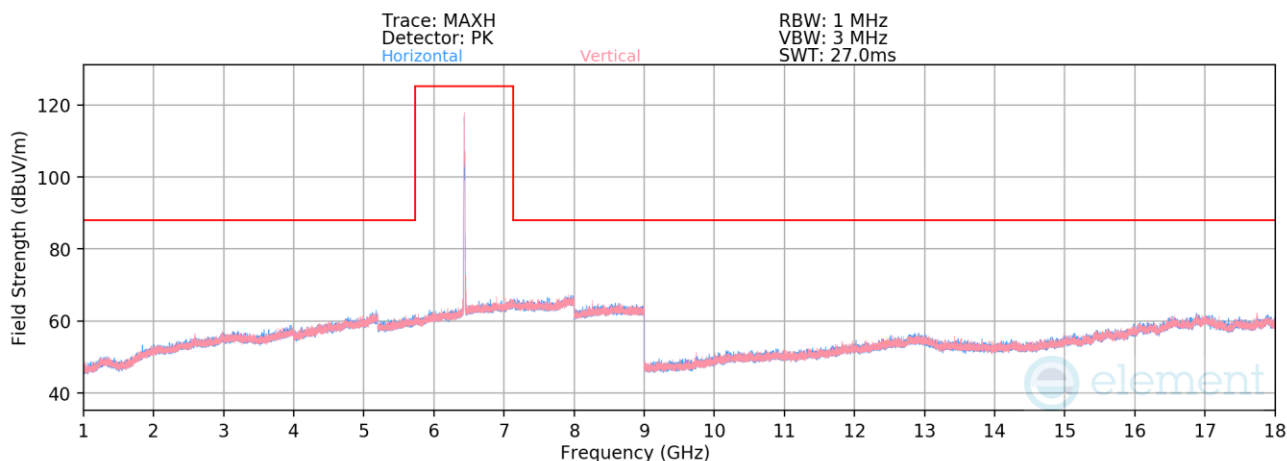

Plot 7-820. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 97 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435MHz
Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12870.00	Average	V	-	-	-86.05	21.87	42.82	68.23	-25.41
12870.00	Peak	V	-	-	-73.26	21.87	55.61	88.23	-32.62


Table 7-132. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 271 of 464

V 11.0 05/2025

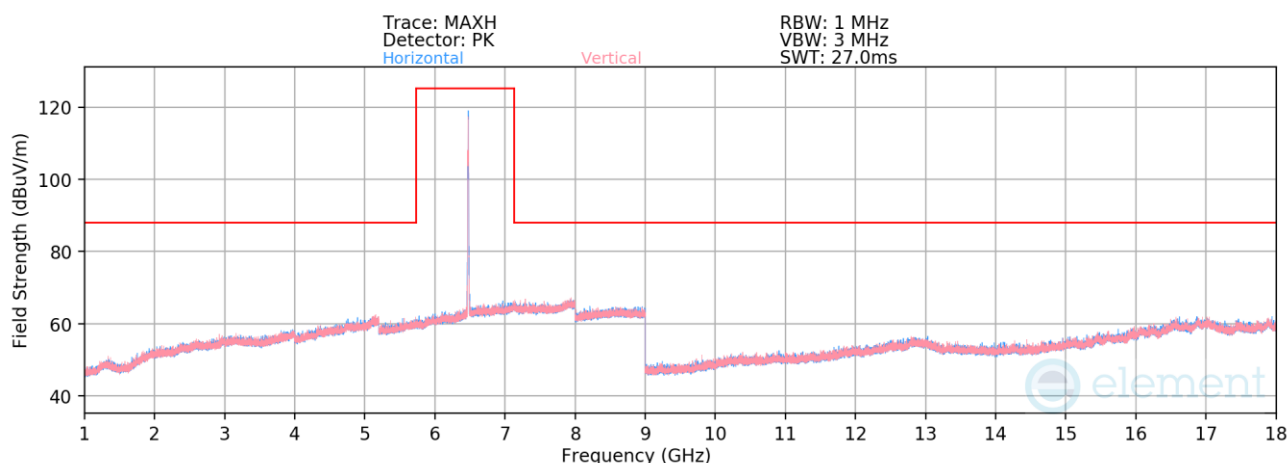

Plot 7-821. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 105 – RU26)

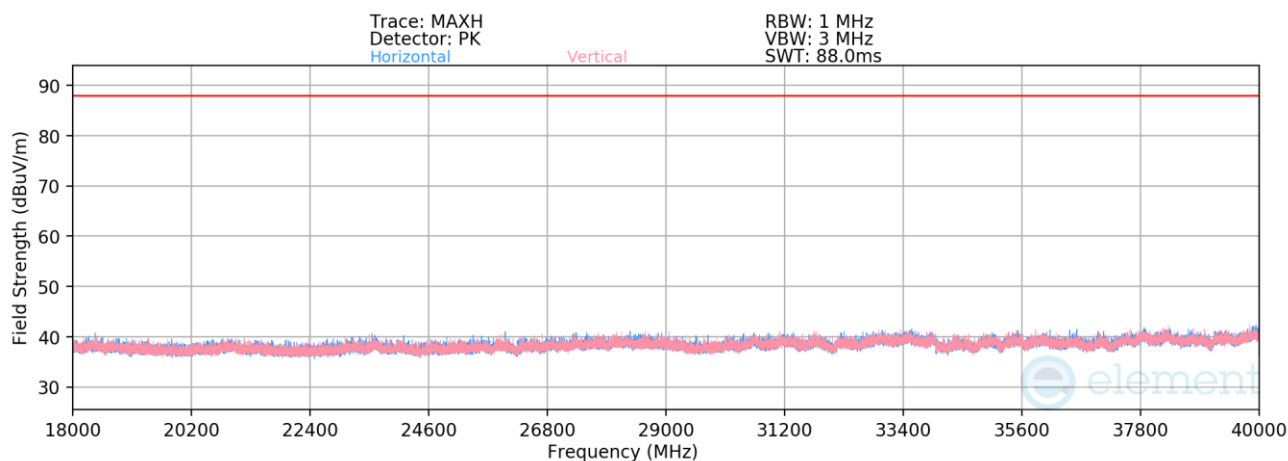

Plot 7-822. Radiated Spurious Emissions 18-40GHz SDM Diversity (802.11be – Ch. 105 – RU26)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6475MHz
Channel:	105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12950.00	Average	V	-	-	-86.08	21.88	42.80	68.23	-25.43
12950.00	Peak	V	-	-	-74.18	21.88	54.71	88.23	-33.52

Table 7-133. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 272 of 464

V 11.0 05/2025

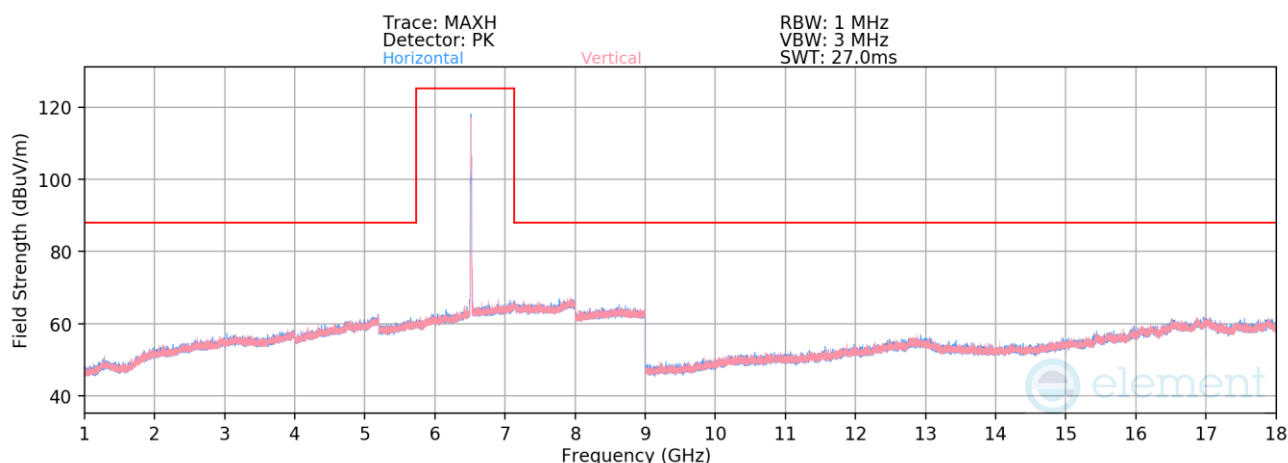

Plot 7-823. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 113 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6515MHz
Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13030.00	Average	V	-	-	-86.15	22.09	42.94	68.23	-25.29
13030.00	Peak	V	-	-	-74.74	22.09	54.35	88.23	-33.88

Table 7-134. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 273 of 464

V 11.0 05/2025

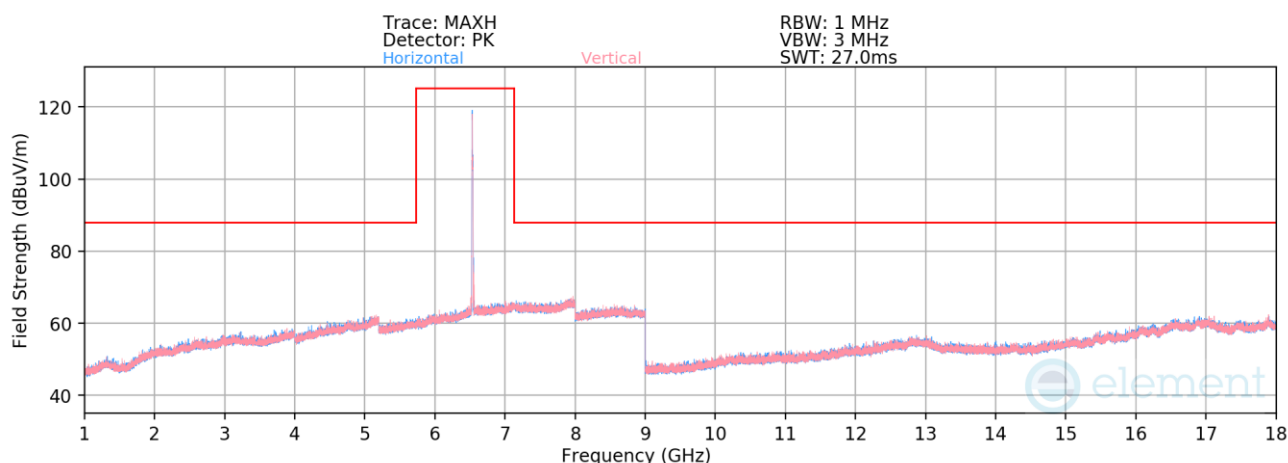

Plot 7-824. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 117 – RU52)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535MHz
Channel: 117


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13070.00	Average	V	-	-	-85.17	22.02	43.85	68.23	-24.38
13070.00	Peak	V	-	-	-74.68	22.02	54.34	88.23	-33.89

Table 7-135. Radiated Spurious Emission Measurements SDM Diversity – RU52


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 274 of 464

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

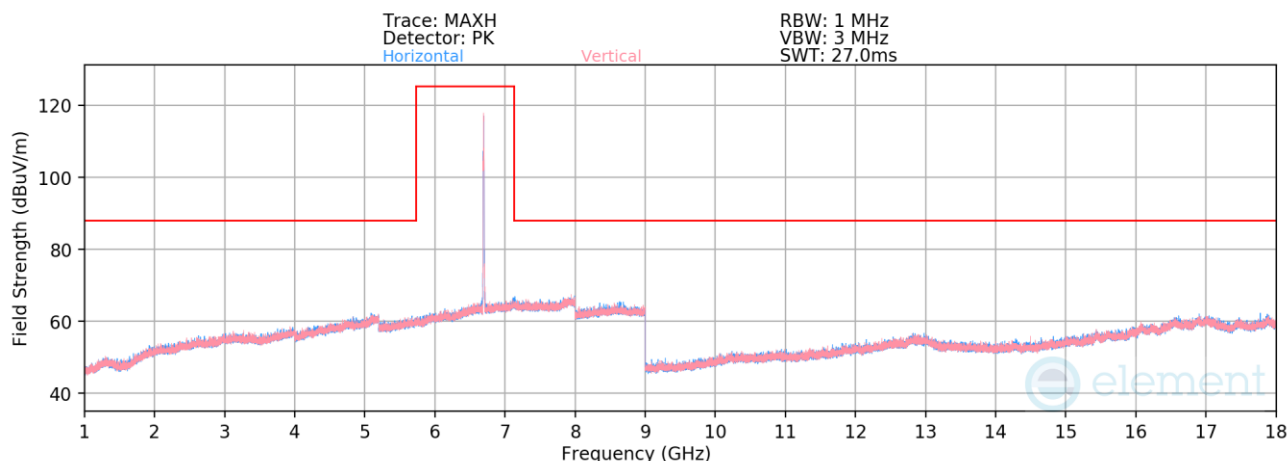

Plot 7-825. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 149 – RU52)

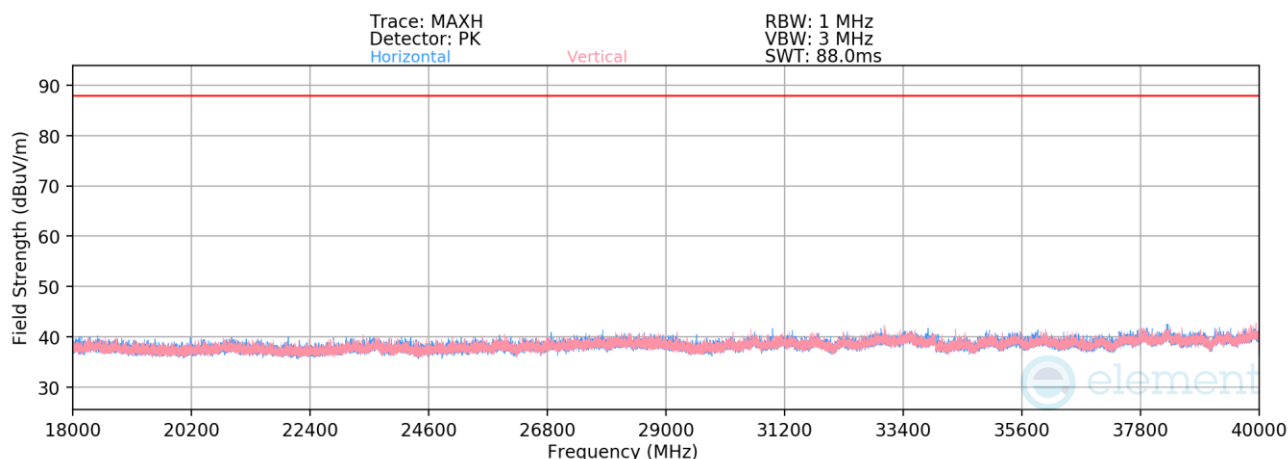

Plot 7-826. Radiated Spurious Emissions 18-40GHz SDM Diversity (802.11be – Ch. 149 – RU52)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6695MHz
Channel:	149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 13390.00	Average	V	-	-	-85.36	22.01	43.65	68.23	-24.58
* 13390.00	Peak	V	-	-	-73.87	22.01	55.14	73.98	-18.84

Table 7-136. Radiated Spurious Emission Measurements SDM Diversity – RU52

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 275 of 464

V 11.0 05/2025

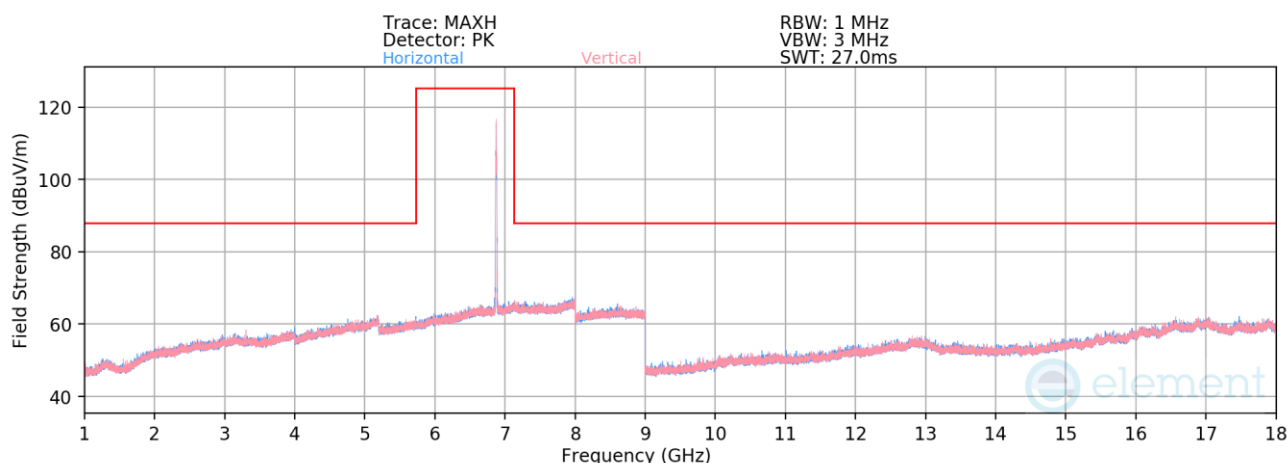

Plot 7-827. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 185 – RU52)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6875MHz
Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13750.00	Average	V	-	-	-85.50	21.79	43.29	68.23	-24.94
13750.00	Peak	V	-	-	-74.74	21.79	54.05	88.23	-34.18

Table 7-137. Radiated Spurious Emission Measurements SDM Diversity – RU52

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 276 of 464

V 11.0 05/2025

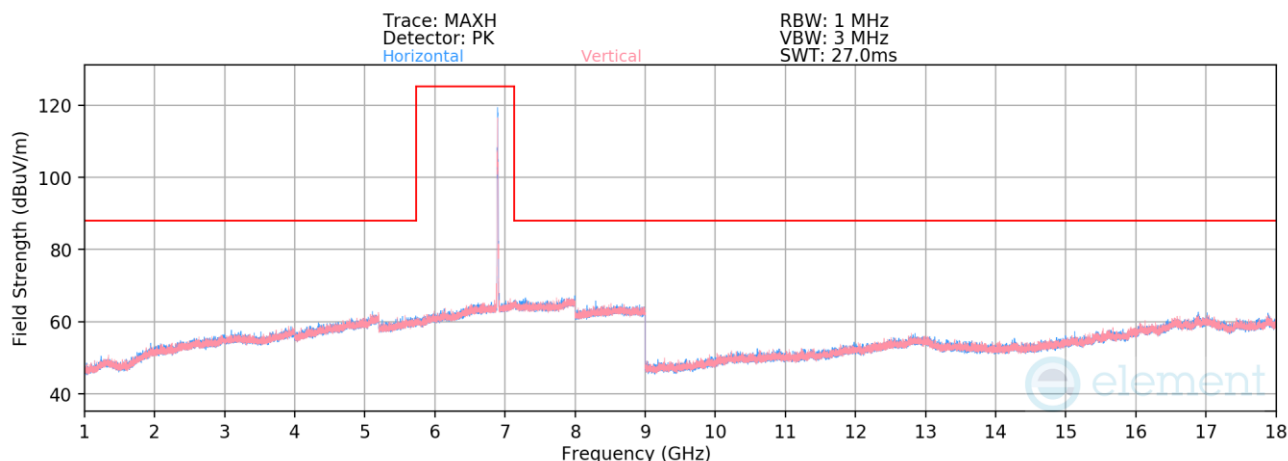

Plot 7-828. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 189 – RU52)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895MHz
Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13790.00	Average	V	-	-	-86.73	22.16	42.43	68.23	-25.80
13790.00	Peak	V	-	-	-74.17	22.16	54.99	88.23	-33.24


Table 7-138. Radiated Spurious Emission Measurements SDM Diversity – RU52

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 277 of 464

V 11.0 05/2025

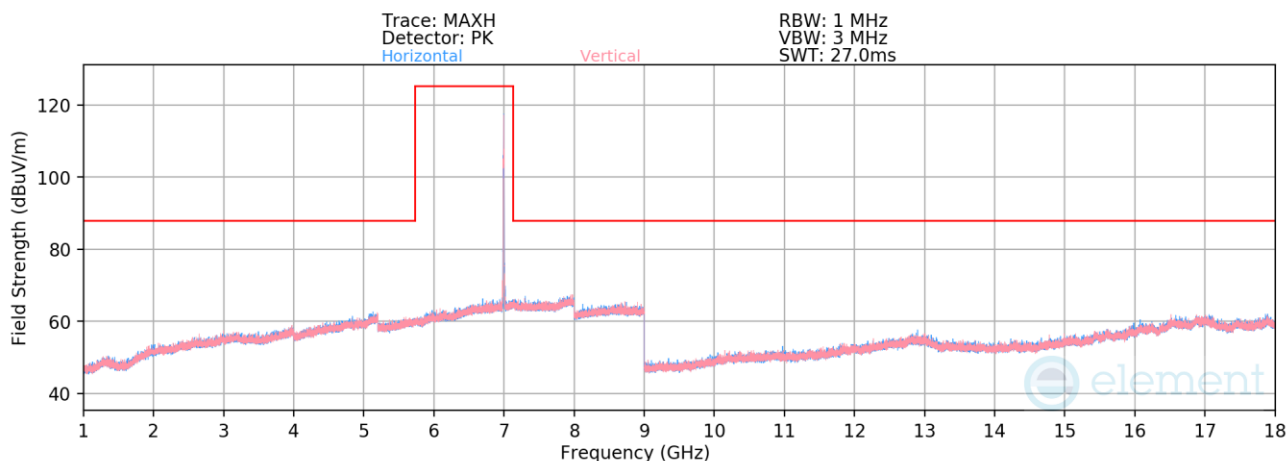

Plot 7-829. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 209 – RU52)

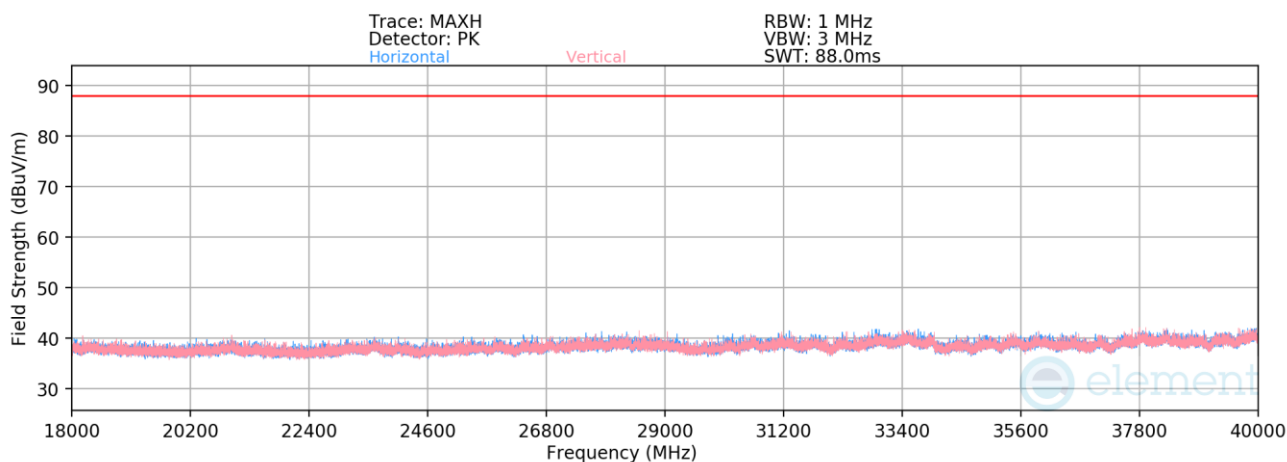


Plot 7-830. Radiated Spurious Emissions 18-40GHz SDM Diversity (802.11be – Ch. 209 – RU52)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6995MHz
Channel:	209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Average	V	-	-	-85.68	22.04	43.36	68.23	-24.87
13990.00	Peak	V	-	-	-75.85	22.04	53.19	88.23	-35.04

Table 7-139. Radiated Spurious Emission Measurements SDM Diversity – RU52

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 278 of 464

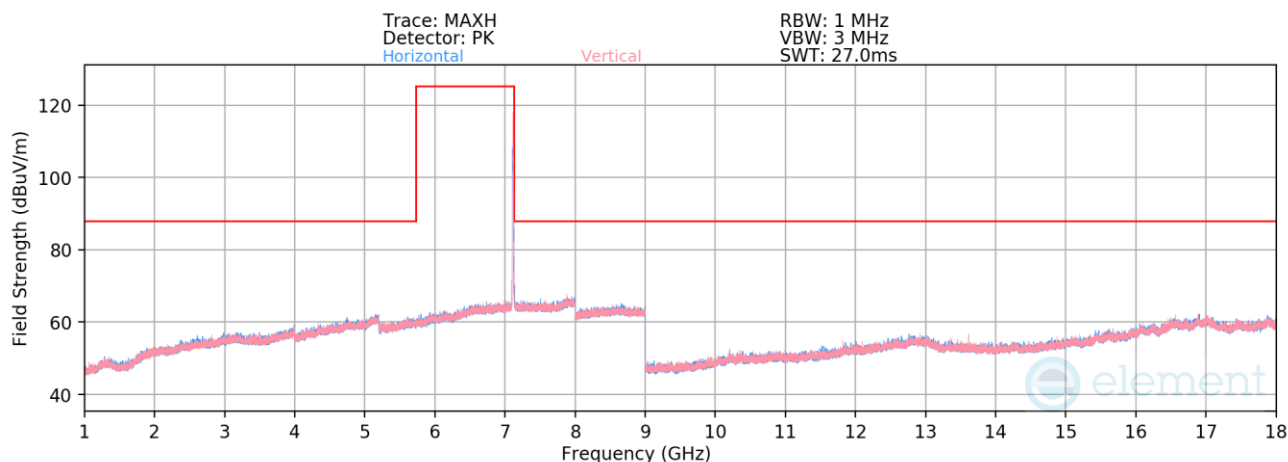

Plot 7-831. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 229 – RU52)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
14190.00	Peak	V	-	-	-73.79	21.93	55.14	88.23	-33.09
14190.00	Average	V	-	-	-85.46	21.93	43.48	68.23	-24.75


Table 7-140. Radiated Spurious Emission Measurements SDM Diversity – RU52

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 279 of 464

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

RU242

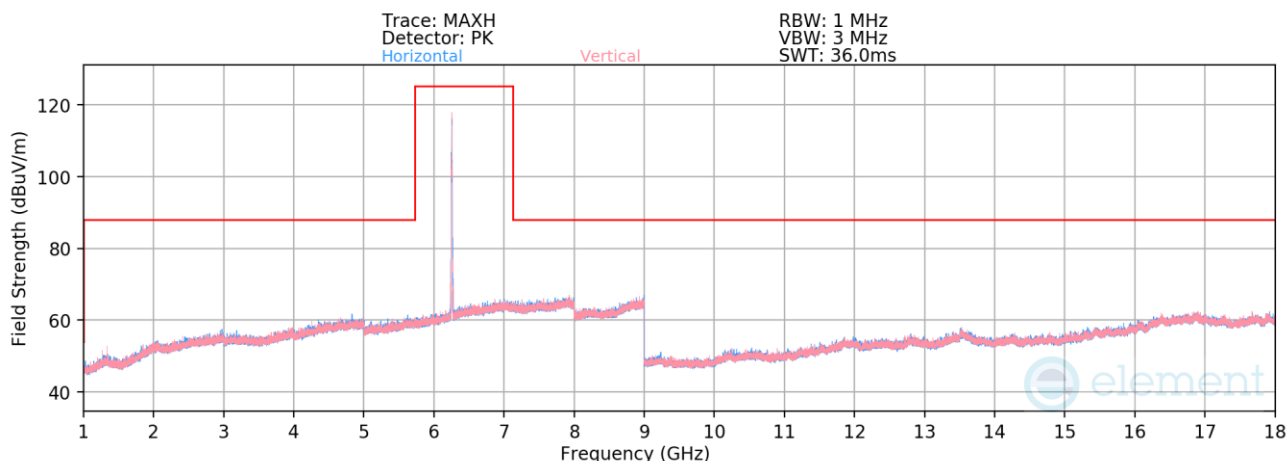

Plot 7-832. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 33 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6115MHz
Channel: 33

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12230.00	Average	V	-	-	-85.01	20.93	42.93	53.98	-11.05
* 12230.00	Peak	V	-	-	-73.19	20.93	54.75	73.98	-19.23


Table 7-141. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 280 of 464

V 11.0 05/2025

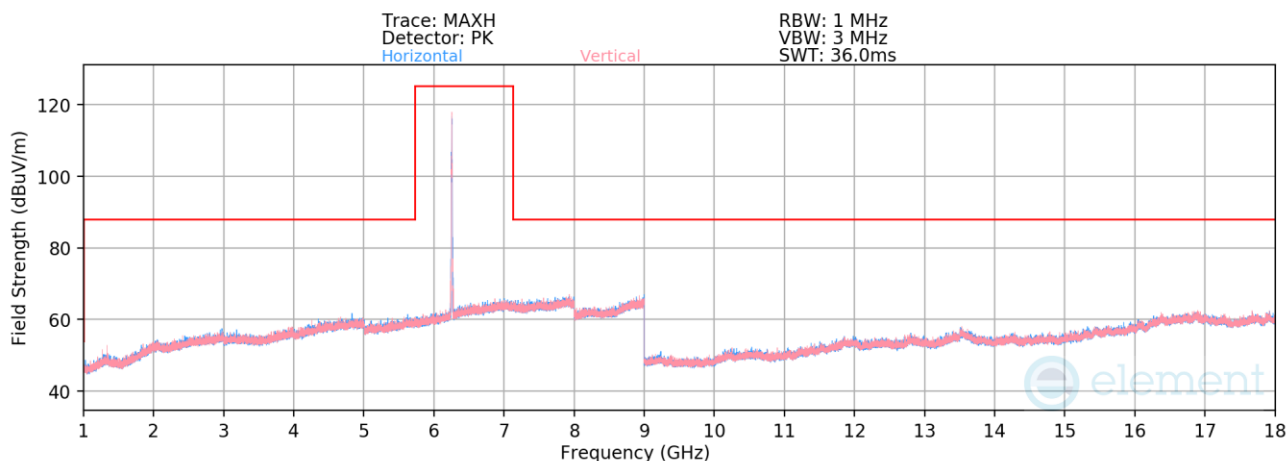

Plot 7-833. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 61 – RU242)

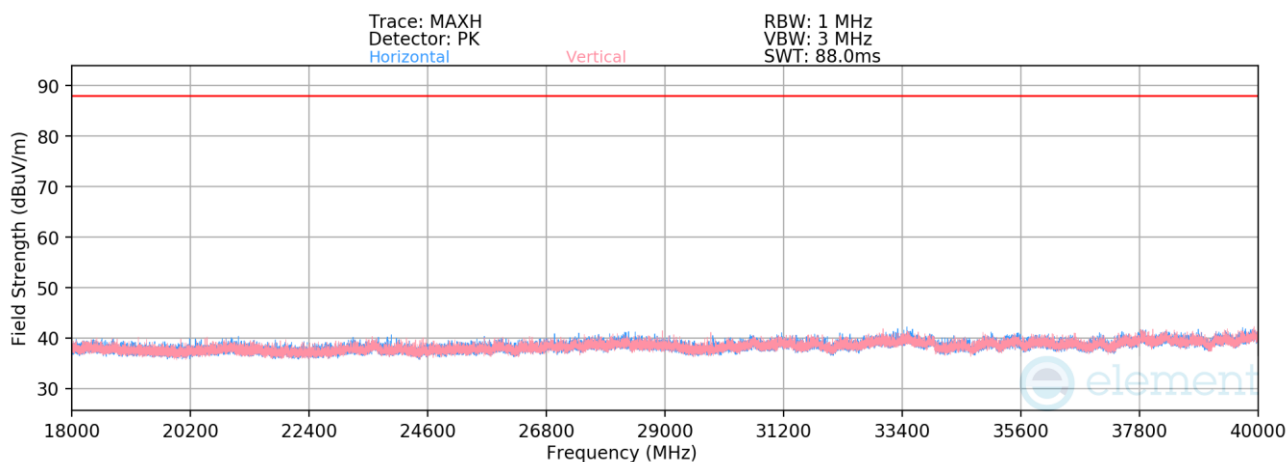

Plot 7-834. Radiated Spurious Emissions 18-40GHz SDM Diversity (802.11be – Ch. 61 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6255MHz
Channel: 61


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 12510.00	Average	V	-	-	-84.70	21.29	43.59	53.98	-10.39
* 12510.00	Peak	V	-	-	-73.11	21.29	55.18	73.98	-18.80

Table 7-142. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 281 of 464

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

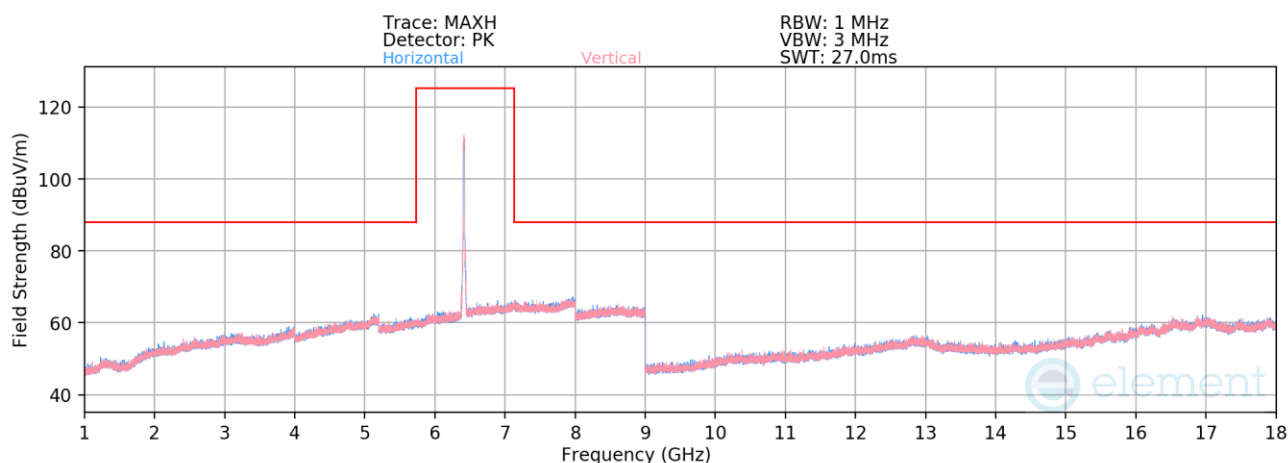

Plot 7-835. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 93 – RU242)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6415MHz
Channel:	93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12830.00	Average	V	-	-	-86.12	22.11	42.99	68.23	-25.24
12830.00	Peak	V	-	-	-75.36	22.11	53.74	88.23	-34.49

Table 7-143. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 282 of 464

V 11.0 05/2025

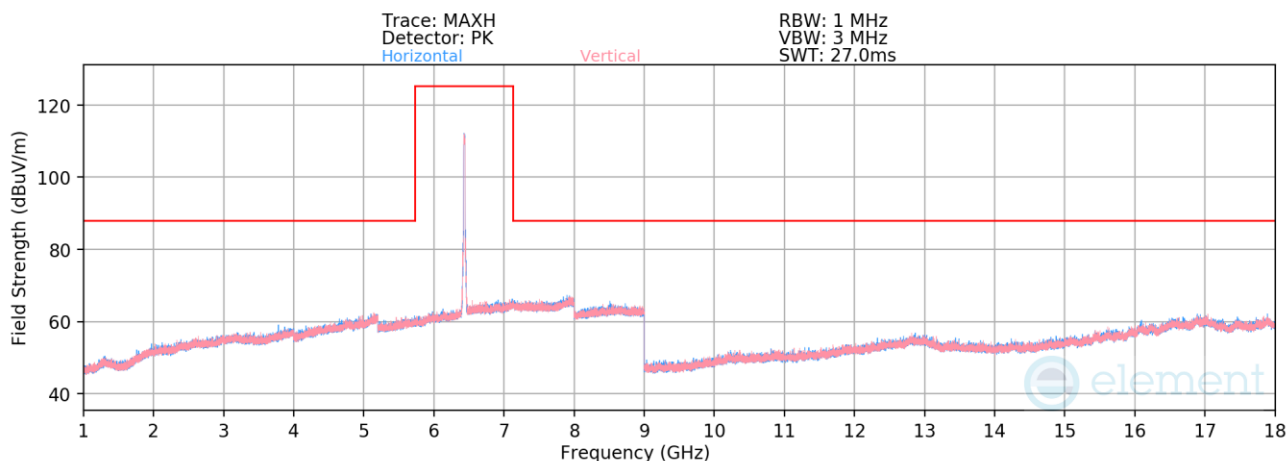

Plot 7-836. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 97 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435MHz
Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12870.00	Average	V	-	-	-85.33	21.87	43.54	68.23	-24.69
12870.00	Peak	V	-	-	-74.31	21.87	54.56	88.23	-33.67


Table 7-144. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 283 of 464

V 11.0 05/2025

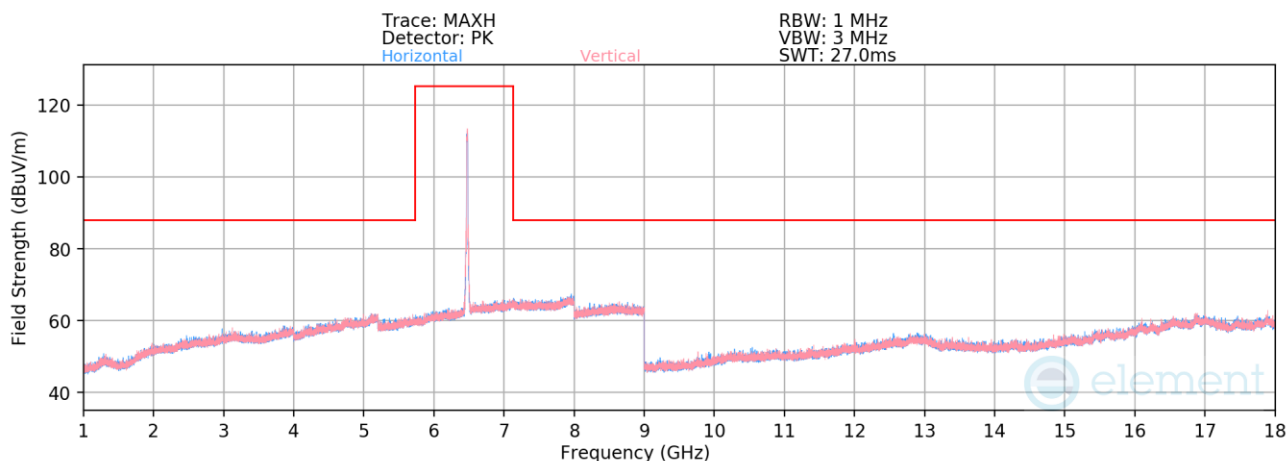

Plot 7-837. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 105 – RU242)

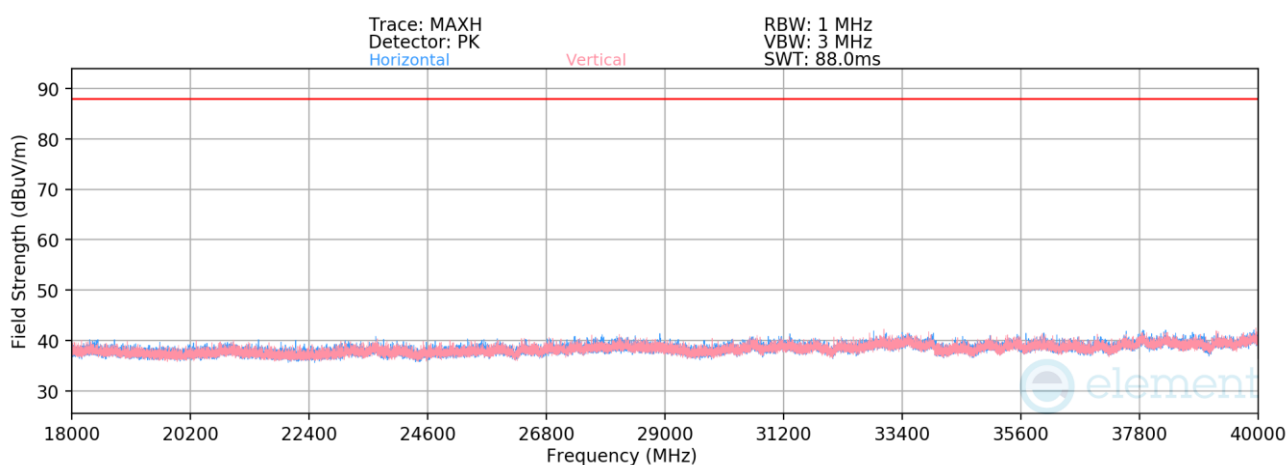

Plot 7-838. Radiated Spurious Emissions 18-40GHz SDM Diversity (802.11be – Ch. 105 – RU242)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6475MHz
Channel:	105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12950.00	Average	V	-	-	-85.49	21.80	43.32	68.23	-24.91
12950.00	Peak	V	-	-	-74.61	21.80	54.19	88.23	-34.04

Table 7-145. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 284 of 464

V 11.0 05/2025

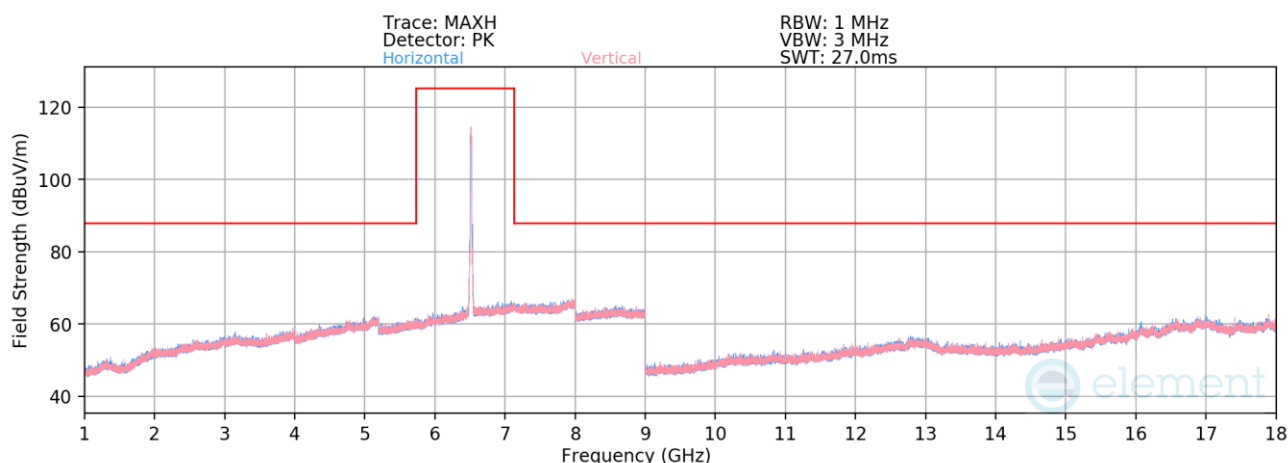

Plot 7-839. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 113 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6515MHz
Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13030.00	Average	H	-	-	-86.10	22.02	42.92	68.23	-25.31
13030.00	Peak	H	-	-	-74.73	22.02	54.29	88.23	-33.94

Table 7-146. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 285 of 464

V 11.0 05/2025

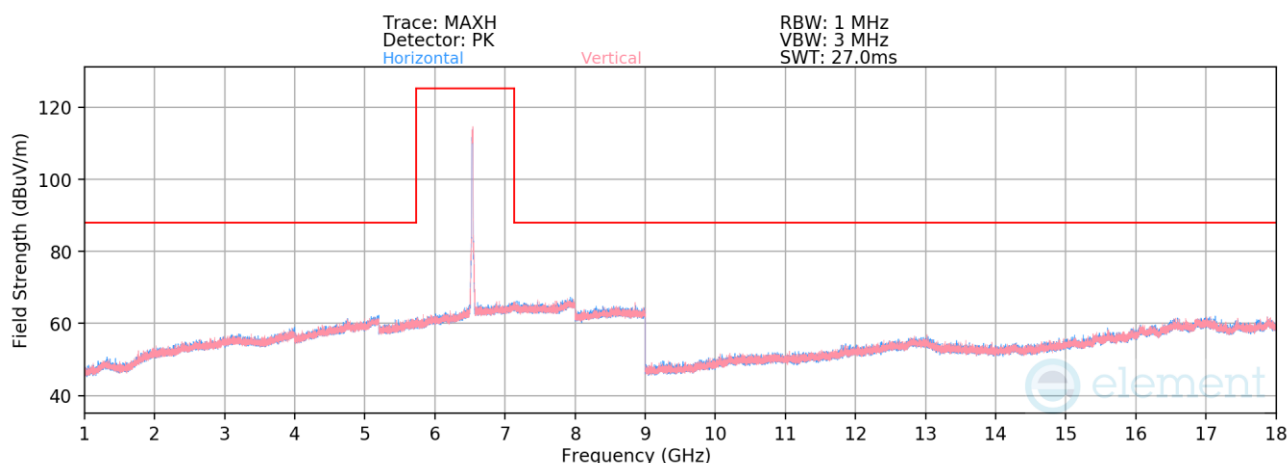

Plot 7-840. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 117 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535MHz
Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13070.00	Average	V	-	-	-85.48	21.74	43.25	68.23	-24.98
13070.00	Peak	V	-	-	-73.53	21.74	55.21	88.23	-33.02


Table 7-147. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 286 of 464

V 11.0 05/2025

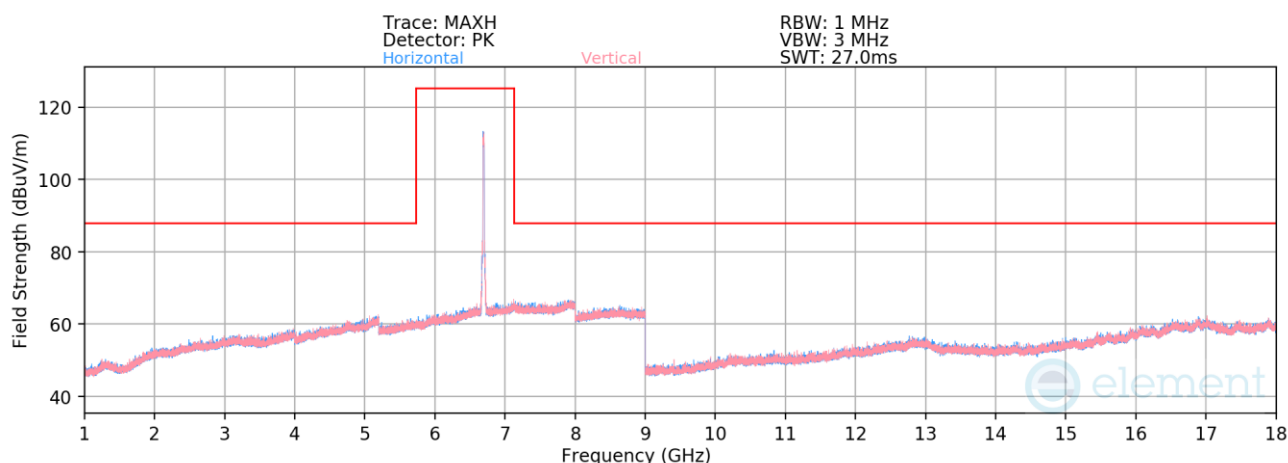

Plot 7-841. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 149 – RU242)

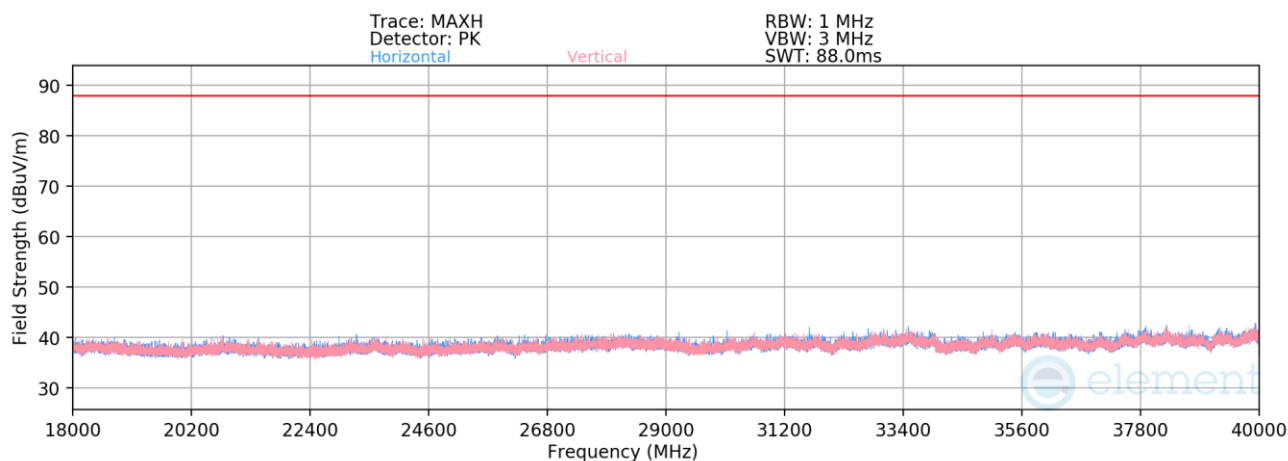

Plot 7-842. Radiated Spurious Emissions 18-40GHz SDM Diversity (802.11be – Ch. 149 – RU242)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6695MHz
Channel:	149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 13390.00	Average	V	-	-	-85.87	21.80	42.93	53.98	-11.05
* 13390.00	Peak	V	-	-	-74.28	21.80	54.52	73.98	-19.46

Table 7-148. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 287 of 464

V 11.0 05/2025

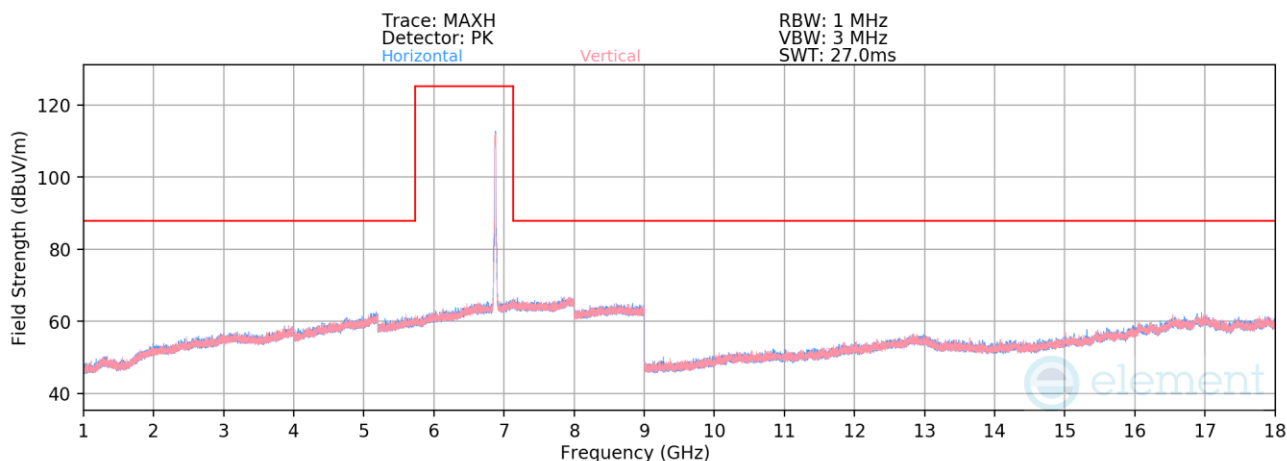

Plot 7-843. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 185 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6875MHz
Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13750.00	Average	H	-	-	-85.37	21.88	43.51	68.23	-24.72
13750.00	Peak	H	-	-	-74.64	21.88	54.24	88.23	-33.99

Table 7-149. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 288 of 464

V 11.0 05/2025

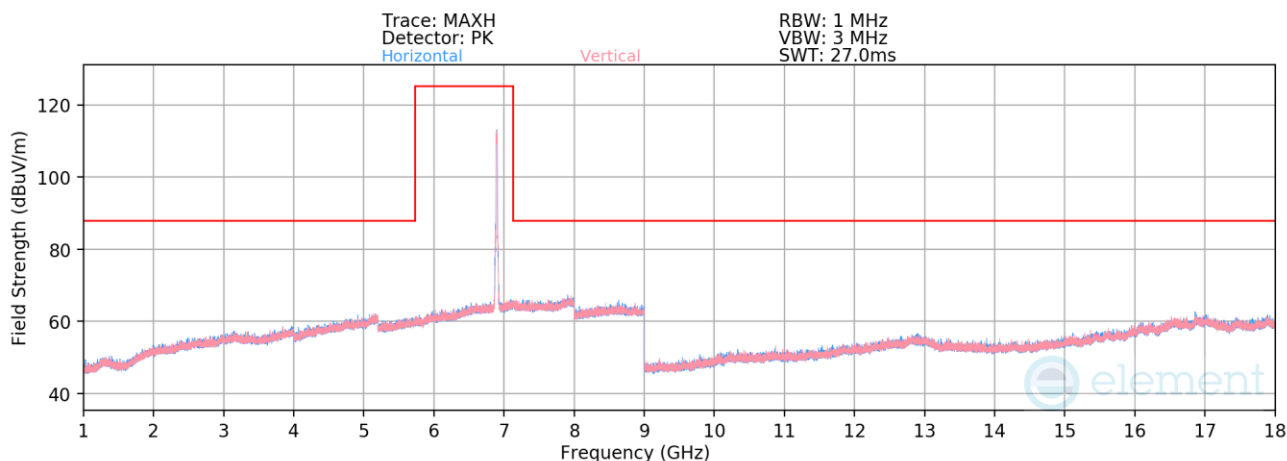

Plot 7-844. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 189 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895MHz
Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13790.00	Average	V	-	-	-86.48	21.88	42.41	68.23	-25.82
13790.00	Peak	V	-	-	-74.56	21.88	54.32	88.23	-33.91


Table 7-150. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 289 of 464

V 11.0 05/2025

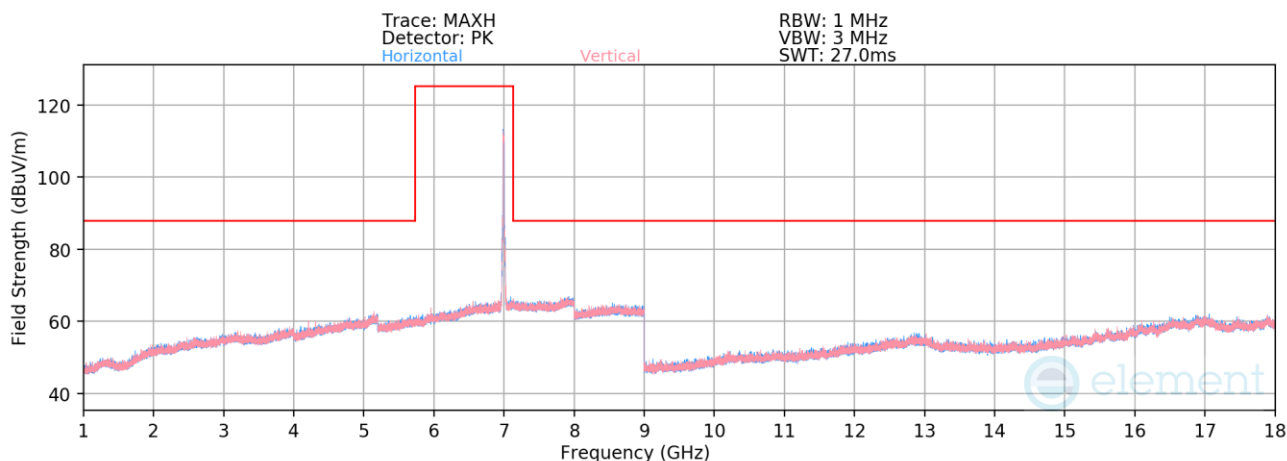

Plot 7-845. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 209 – RU242)

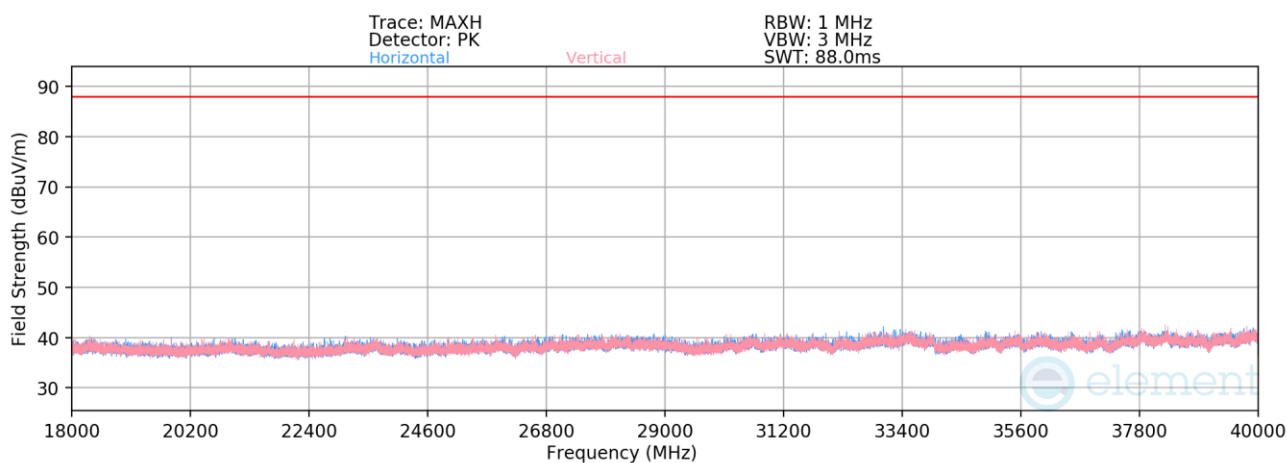

Plot 7-846. Radiated Spurious Emissions 18-40GHz SDM Diversity (802.11be – Ch. 209 – RU242)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6995MHz
Channel:	209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13990.00	Average	V	-	-	-86.24	22.25	43.00	68.23	-25.23
13990.00	Peak	V	-	-	-75.57	22.25	53.67	88.23	-34.56

Table 7-151. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 290 of 464

V 11.0 05/2025

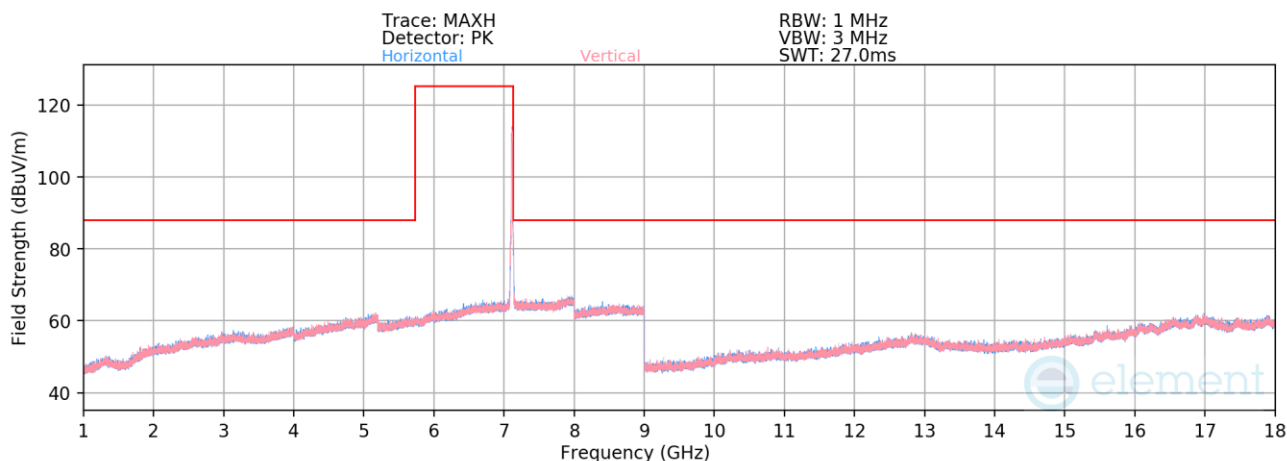

Plot 7-847. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 233 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 7115MHz
Channel: 233

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
14230.00	Average	H	-	-	-86.41	22.86	43.45	68.23	-24.78
14230.00	Peak	H	-	-	-75.78	22.86	54.08	88.23	-34.15

Table 7-152. Radiated Spurious Emission Measurements SDM Diversity – RU242


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 291 of 464

V 11.0 05/2025

7.7.3 Antenna WF5B Radiated Band Edge Measurements (20MHz BW)


RU26

Mode: 802.11be OFDMA
 Transfer Rate: MCS11
 RU Index: 0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6115MHz
 Channel: 33

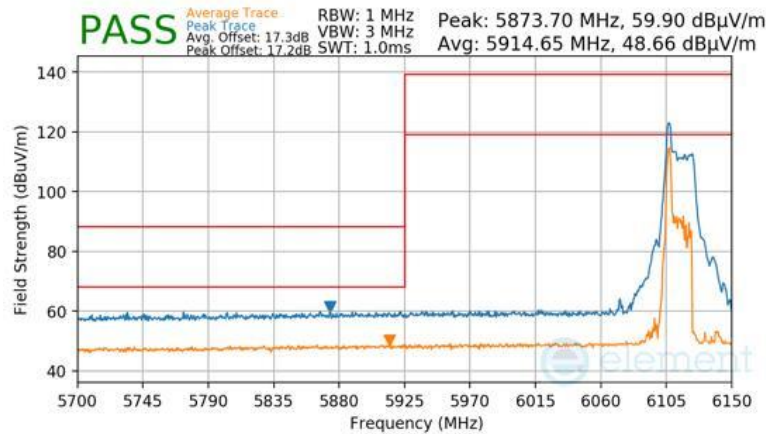

Plot 7-848 Antenna WF5B Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26

Mode: 802.11be OFDMA
 Transfer Rate: MCS11
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 6115MHz
 Channel: 33

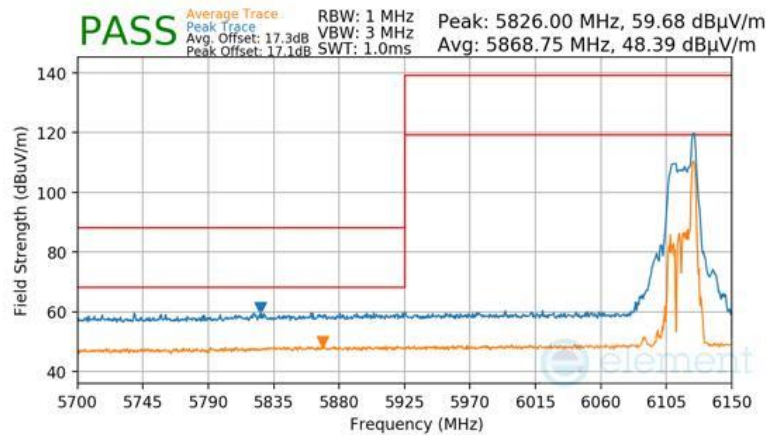

Plot 7-849 Antenna WF5B Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-27-R2.BCG	Test Dates: 05/12/2025 - 09/10/2025	EUT Type: Tablet Device	Page 292 of 464

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.