




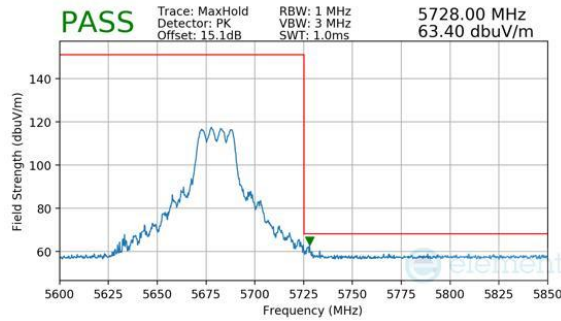


Plot 7-387. CDD Primary (Peak, Ch.136, 802.11be(SU), MCS11)

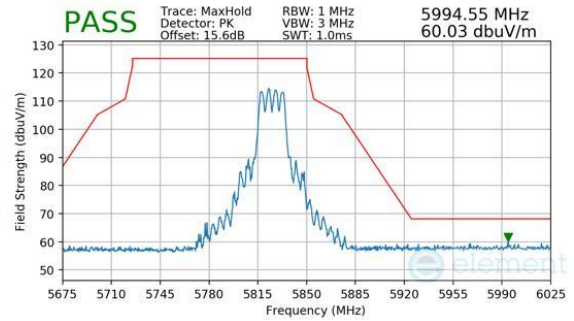

Plot 7-390. CDD Primary (Peak, Ch.165, 802.11be(SU), MCS11)

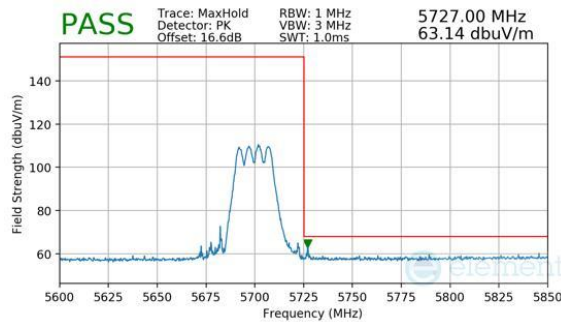


Plot 7-388. CDD Primary (Peak, Ch.140, 802.11be(SU), MCS11)

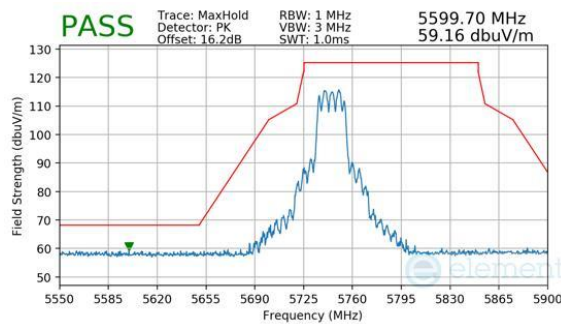


Plot 7-389. CDD Primary (Peak, Ch.149, 802.11be(SU), MCS11)

FCC ID: BCGA3361 IC: 579C-A3361	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 214 of 255


7.6.17 CDD Primary Radiated Band Edge Measurements (40MHz BW)

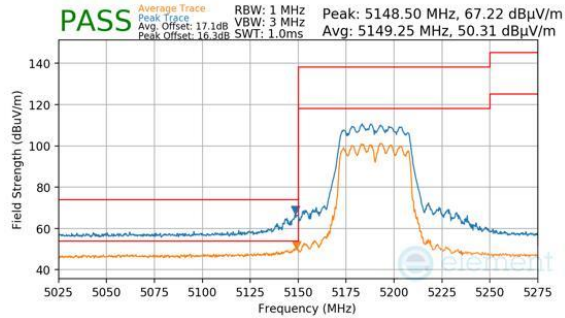


Plot 7-391. CDD Primary (Peak & Average, Ch.38, 802.11n, MCS7)

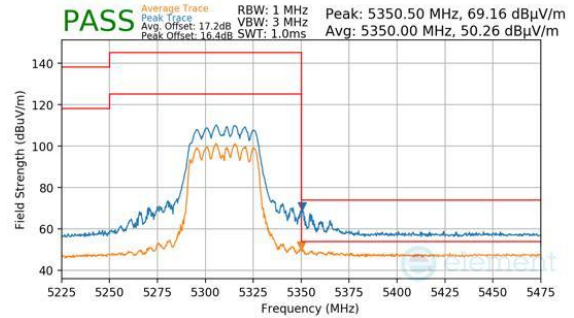


Plot 7-394. CDD Primary (Peak & Average, Ch.62, 802.11n, MCS7)

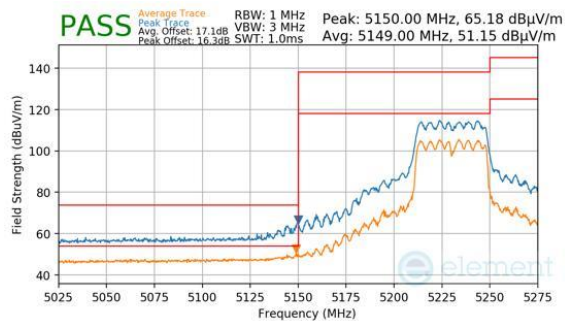


Plot 7-392. CDD Primary (Peak & Average, Ch.46, 802.11n, MCS7)

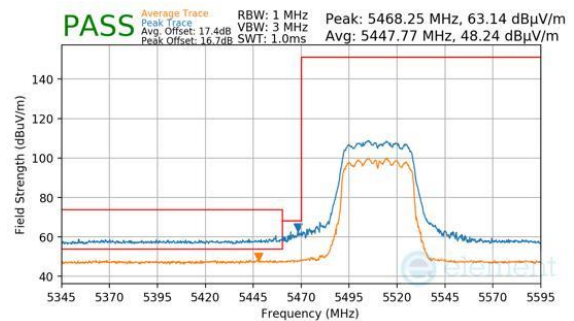

Plot 7-395. CDD Primary (Peak & Average, Ch.102, 802.11n, MCS7)

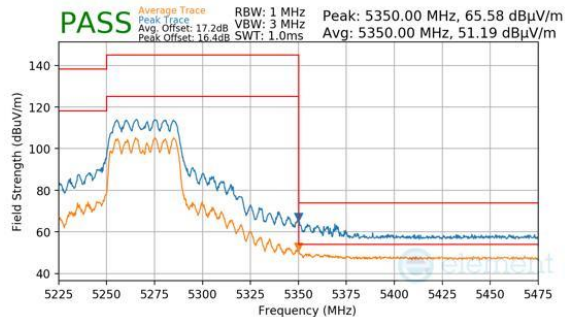


Plot 7-393. CDD Primary (Peak & Average, Ch.54, 802.11n, MCS7)

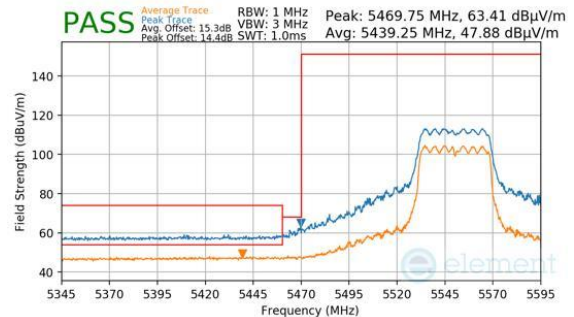


Plot 7-396. CDD Primary (Peak & Average, Ch.110, 802.11n, MCS7)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device		Page 215 of 255

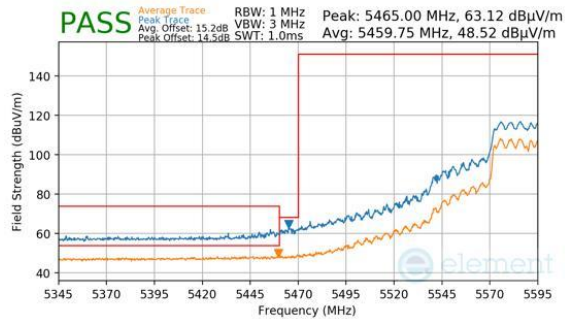


Plot 7-397. CDD Primary (Peak & Average, Ch.118 (FCC ONLY), 802.11n, MCS7)

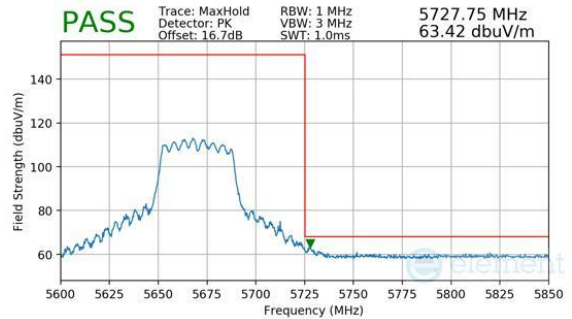


Plot 7-400. CDD Primary (Peak, Ch.134, 802.11n, MCS7)

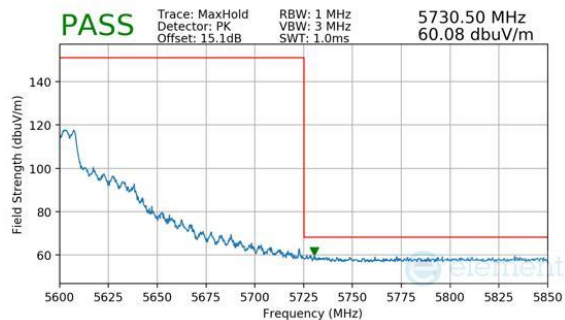


Plot 7-398. CDD Primary (Peak, Ch.118 (FCC ONLY), 802.11n, MCS7)

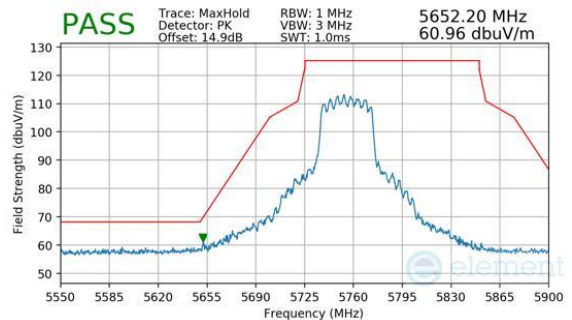

Plot 7-401. CDD Primary (Peak, Ch.151, 802.11n, MCS7)

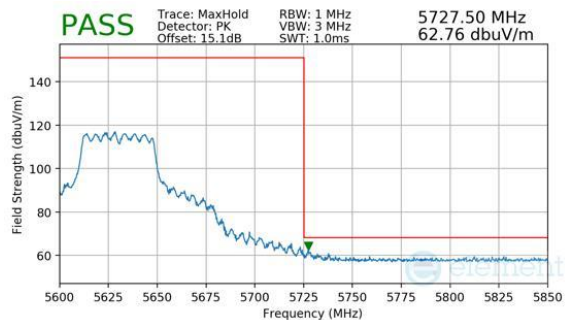


Plot 7-399. CDD Primary (Peak, Ch.126 (FCC ONLY), 802.11n, MCS7)

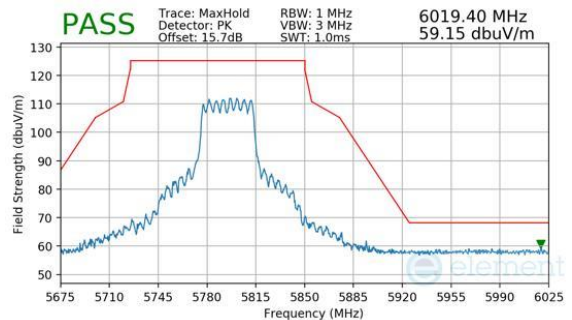


Plot 7-402. CDD Primary (Peak, Ch.159, 802.11n, MCS7)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 216 of 255

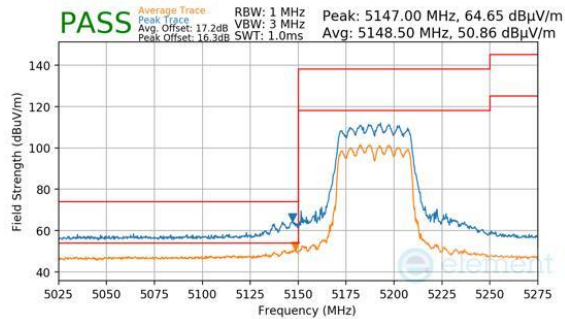


Plot 7-403. CDD Primary (Peak & Average, Ch.38, 802.11be(SU), MCS11)

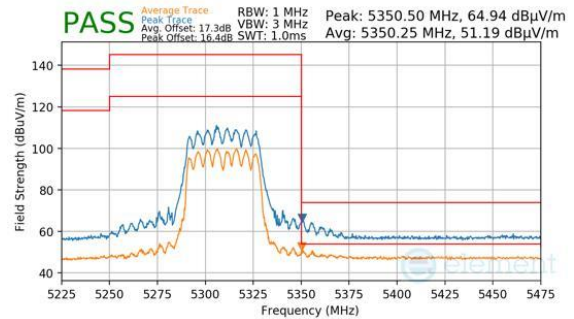


Plot 7-406. CDD Primary (Peak & Average, Ch.62, 802.11be(SU), MCS11)

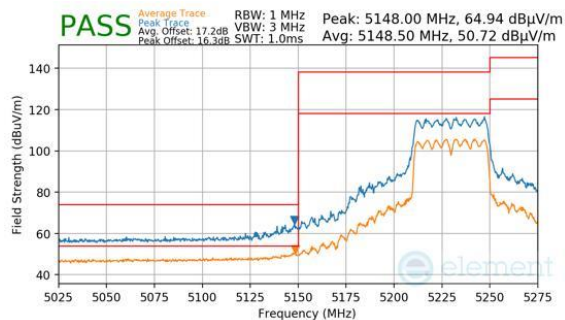


Plot 7-404. CDD Primary (Peak & Average, Ch.46, 802.11be(SU), MCS11)

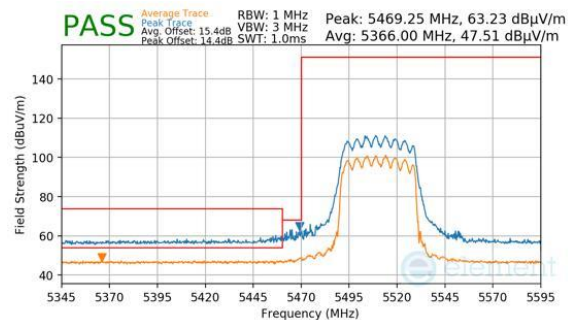

Plot 7-407. CDD Primary (Peak & Average, Ch.102, 802.11be(SU), MCS11)

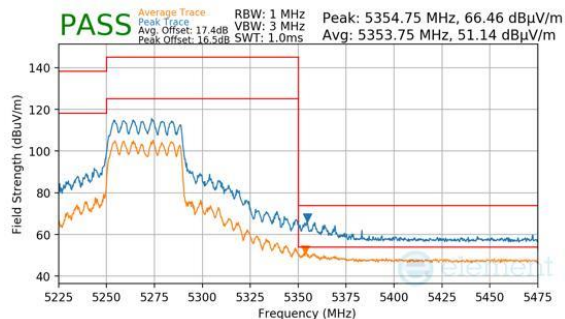


Plot 7-405. CDD Primary (Peak & Average, Ch.54, 802.11be(SU), MCS11)

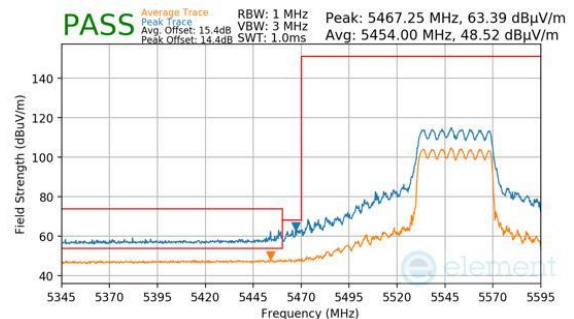


Plot 7-408. CDD Primary (Peak & Average, Ch.110, 802.11be(SU), MCS11)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 217 of 255

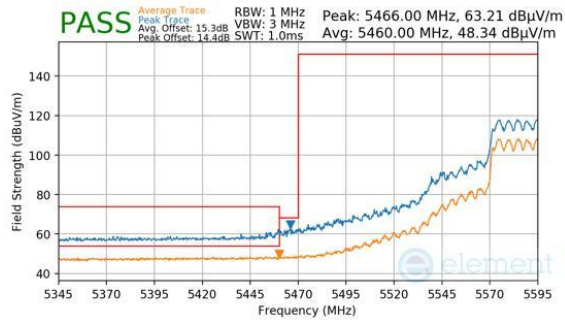


Plot 7-409. CDD Primary (Peak & Average, Ch.118 (FCC ONLY), 802.11be(SU), MCS11)

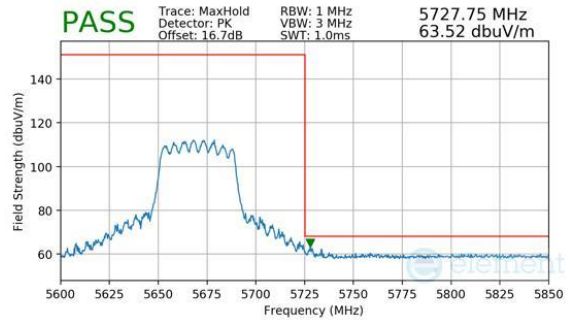


Plot 7-412. CDD Primary (Peak, Ch.134, 802.11be(SU), MCS11)

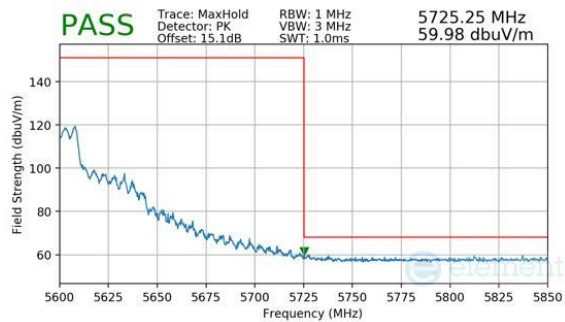


Plot 7-410. CDD Primary (Peak, Ch.118 (FCC ONLY), 802.11be(SU), MCS11)

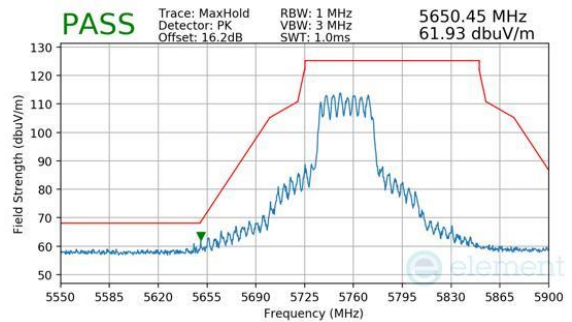

Plot 7-413. CDD Primary (Peak, Ch.151, 802.11be(SU), MCS11)

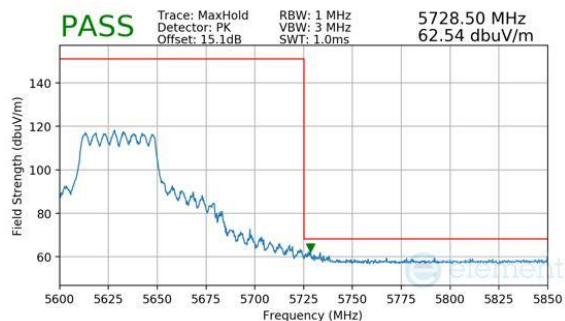


Plot 7-411. CDD Primary (Peak, Ch.126 (FCC ONLY), 802.11be(SU), MCS11)

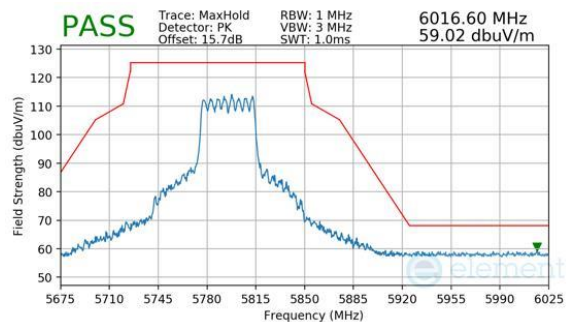


Plot 7-414. CDD Primary (Peak, Ch.159, 802.11be(SU), MCS11)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device		Page 218 of 255


7.6.18 CDD Primary Radiated Band Edge Measurements (80MHz BW)

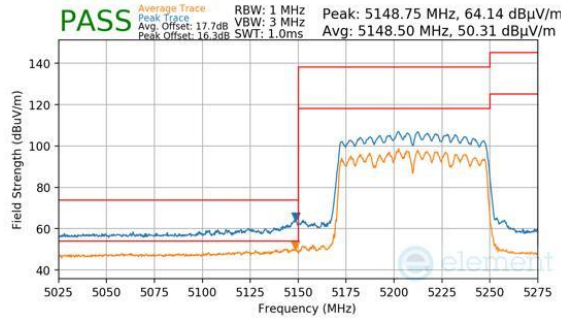


Plot 7-415. CDD Primary (Peak & Average, Ch.42, 802.11ac, MCS9)

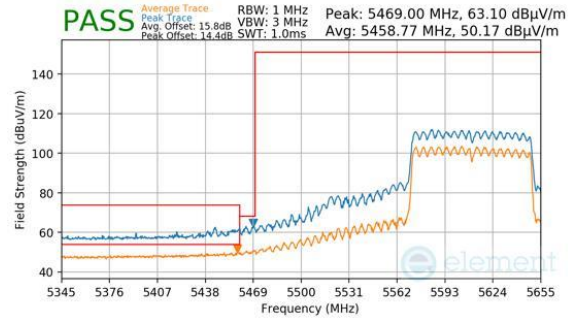


Plot 7-418. CDD Primary (Peak & Average, Ch.122 (FCC ONLY), 802.11ac, MCS9)

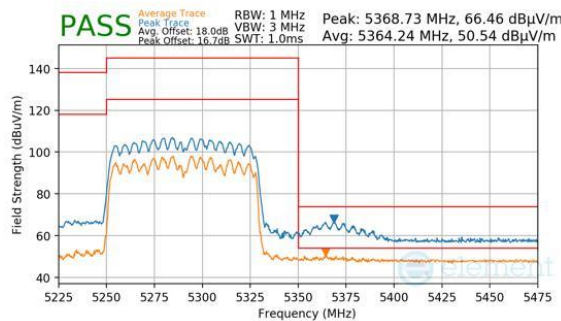


Plot 7-416. CDD Primary (Peak & Average, Ch.58, 802.11ac, MCS9)

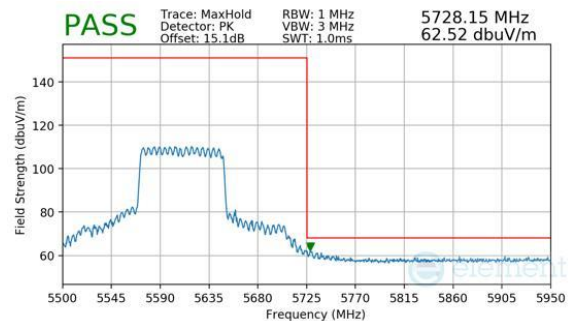

Plot 7-419. CDD Primary (Peak, Ch.122 (FCC ONLY), 802.11ac, MCS9)

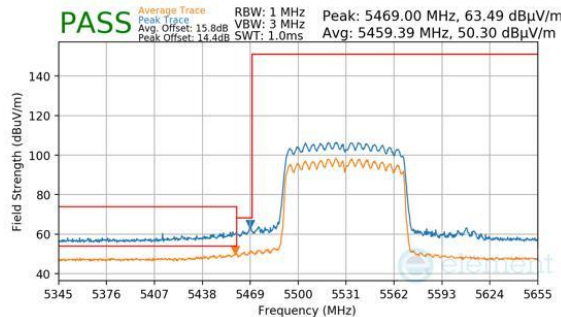


Plot 7-417. CDD Primary (Peak & Average, Ch.106, 802.11ac, MCS9)

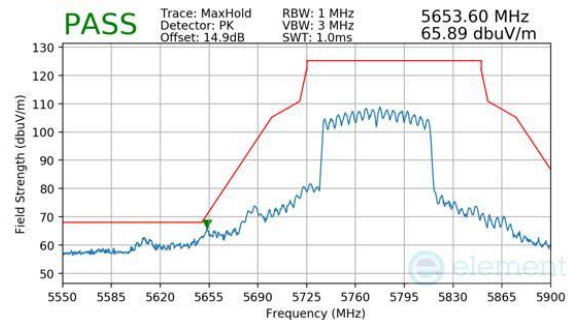


Plot 7-420. CDD Primary (Peak, Ch.155, 802.11ac, MCS9)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 219 of 255

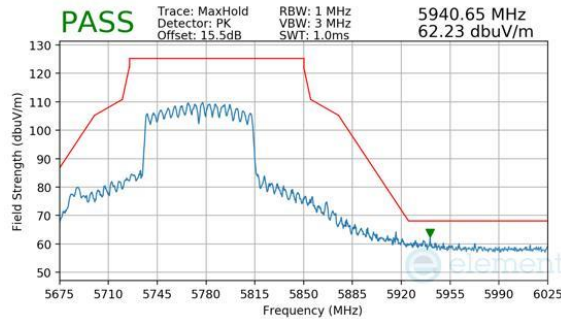


Plot 7-421. CDD Primary (Peak, Ch.155, 802.11ac, MCS9)

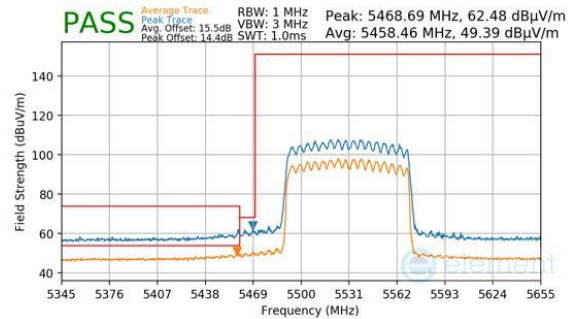


Plot 7-424. CDD Primary (Peak & Average, Ch.106, 802.11be(SU), MCS11)

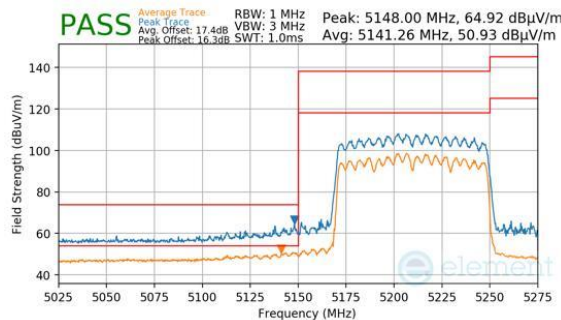


Plot 7-422. CDD Primary (Peak & Average, Ch.42, 802.11be(SU), MCS11)

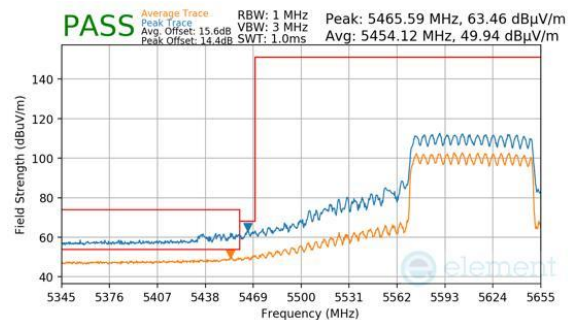

Plot 7-425. CDD Primary (Peak & Average, Ch.122 (FCC ONLY), 802.11be(SU), MCS11)

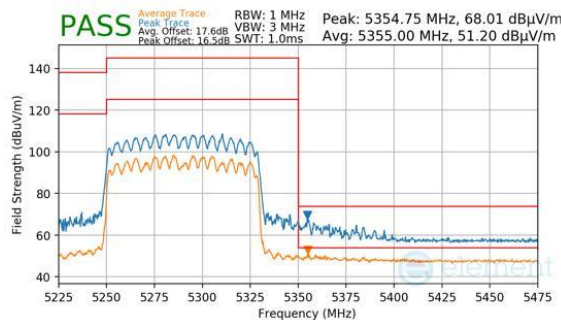


Plot 7-423. CDD Primary (Peak & Average, Ch.58, 802.11be(SU), MCS11)

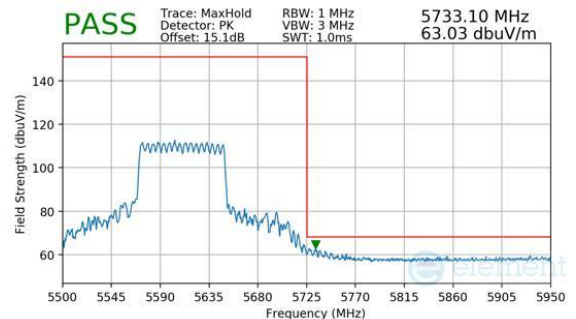


Plot 7-426. CDD Primary (Peak, Ch.122 (FCC ONLY), 802.11be(SU), MCS11)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 220 of 255

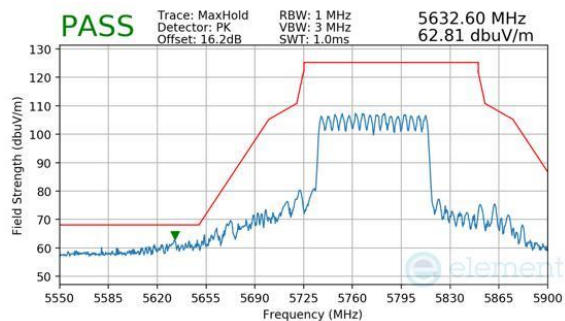


Plot 7-427. CDD Primary (Peak, Ch.155, 802.11be(SU), MCS11)

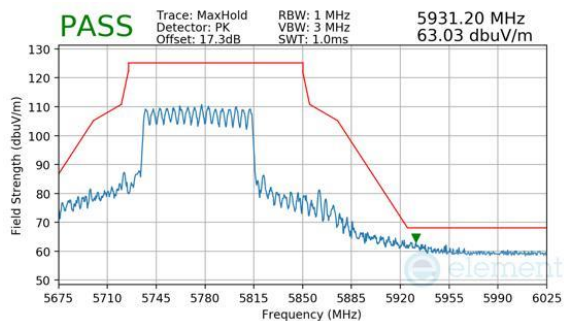


Plot 7-428. CDD Primary (Peak, Ch.155, 802.11be(SU), MCS11)

FCC ID: BCGA3361 IC: 579C-A3361	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 221 of 255


7.6.19 CDD Primary Radiated Band Edge Measurements (160MHz BW)

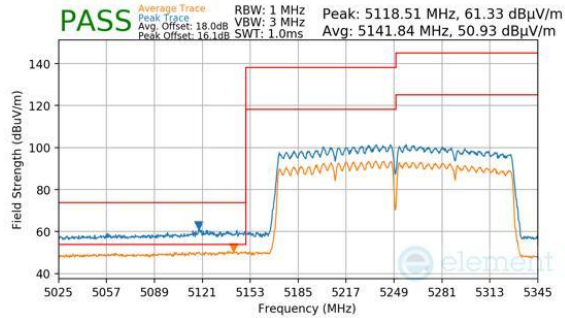


Plot 7-429. CDD Primary (Peak & Average, Ch.50, 802.11ac, MCS9)

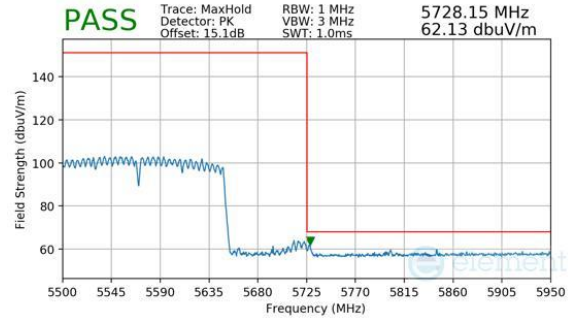


Plot 7-432. CDD Primary (Peak, Ch.114 (FCC ONLY), 802.11ac, MCS9)

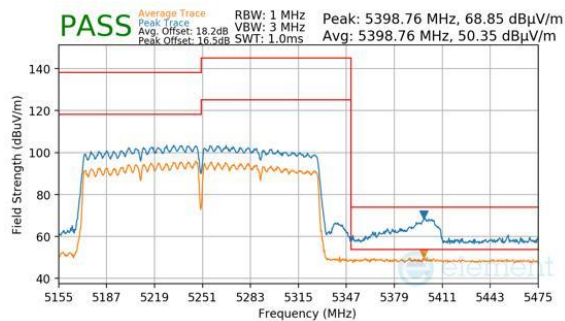


Plot 7-430. CDD Primary (Peak & Average, Ch.50, 802.11ac, MCS9)

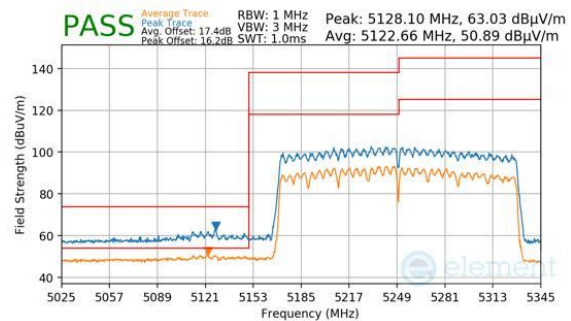

Plot 7-433. CDD Primary (Peak & Average, Ch.50, 802.11be(SU), MCS11)

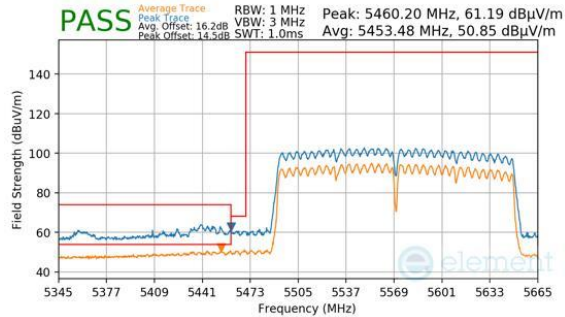


Plot 7-431. CDD Primary (Peak & Average, Ch.114 (FCC ONLY), 802.11ac, MCS9)

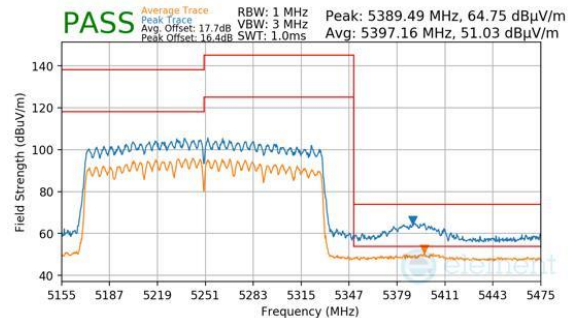


Plot 7-434. CDD Primary (Peak & Average, Ch.50, 802.11be(SU), MCS11)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 222 of 255

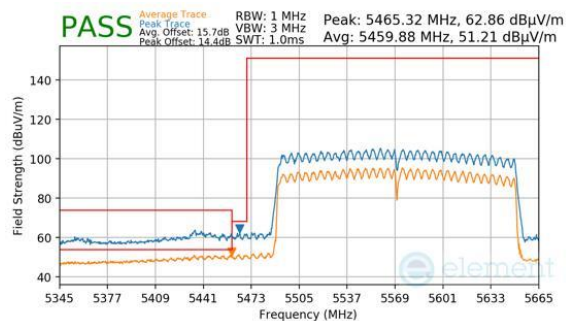


Plot 7-435. CDD Primary (Peak & Average, Ch.114 (FCC ONLY), 802.11be(SU), MCS11)

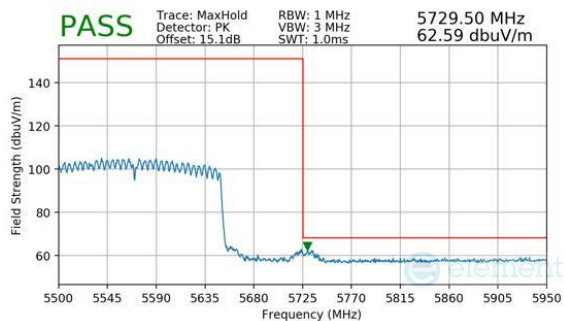


Plot 7-436. CDD Primary (Peak, Ch.114 (FCC ONLY), 802.11be(SU), MCS11)

FCC ID: BCGA3361 IC: 579C-A3361	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 223 of 255


7.6.20 CDD Diversity Radiated Band Edge Measurements (20MHz BW)

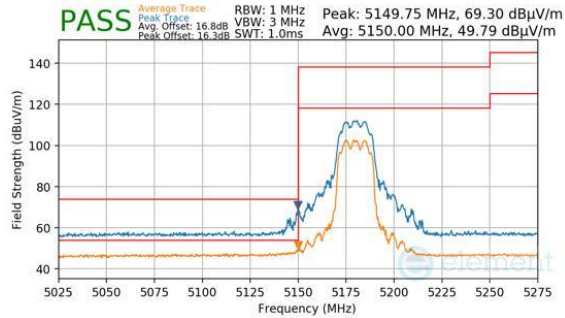


Plot 7-437. CDD Diversity (Peak & Average, Ch.36, 802.11n, MCS7)

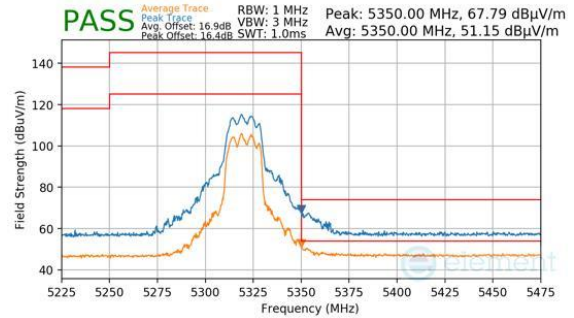


Plot 7-440. CDD Diversity (Peak & Average, Ch.64, 802.11n, MCS7)

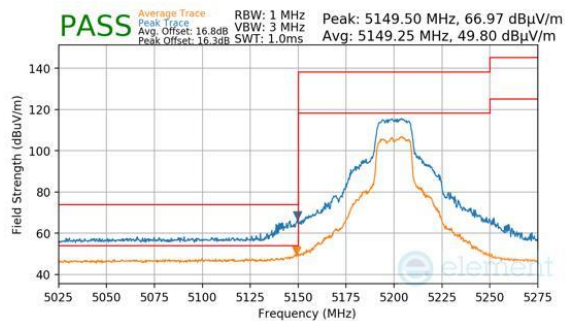


Plot 7-438. CDD Diversity (Peak & Average, Ch.40, 802.11n, MCS7)

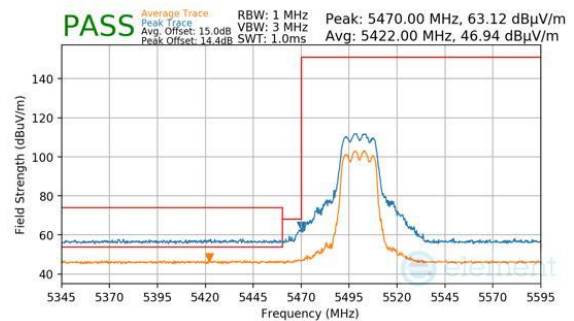

Plot 7-441. CDD Diversity (Peak & Average, Ch.100, 802.11n, MCS7)

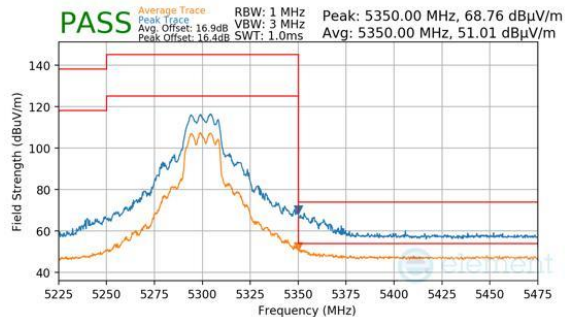


Plot 7-439. CDD Diversity (Peak & Average, Ch.60, 802.11n, MCS7)

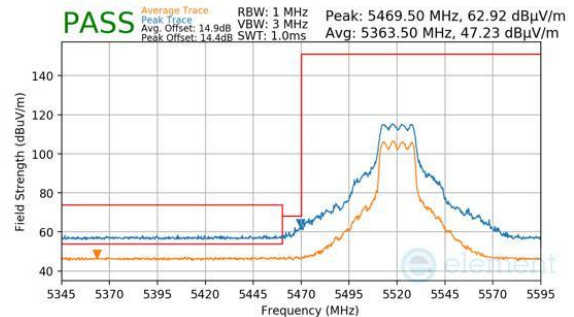


Plot 7-442. CDD Diversity (Peak & Average, Ch.104, 802.11n, MCS7)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device		Page 224 of 255

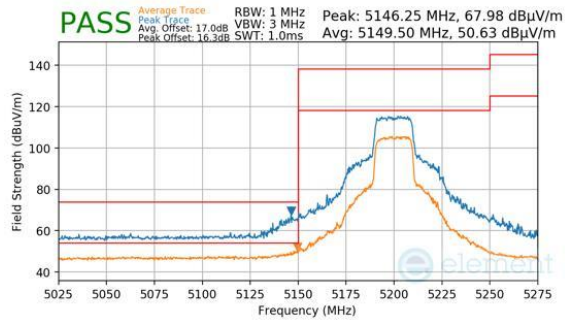


Plot 7-449. CDD Diversity (Peak & Average, Ch.40, 802.11be(SU), MCS11)

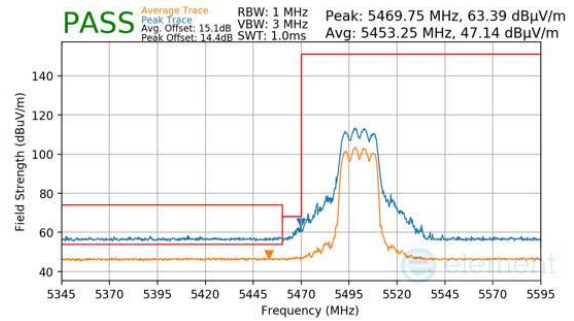


Plot 7-452. CDD Diversity (Peak & Average, Ch.100, 802.11be(SU), MCS11)

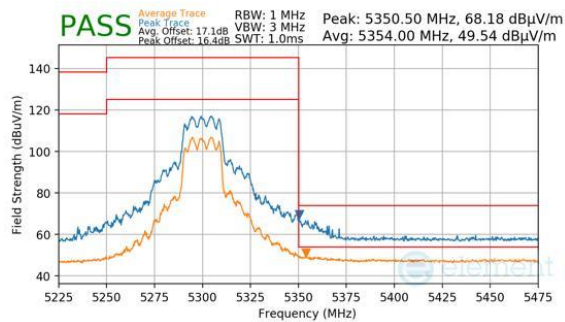


Plot 7-450. CDD Diversity (Peak & Average, Ch.60, 802.11be(SU), MCS11)

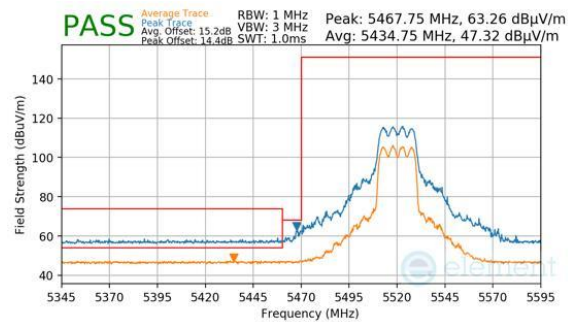

Plot 7-453. CDD Diversity (Peak & Average, Ch.104, 802.11be(SU), MCS11)

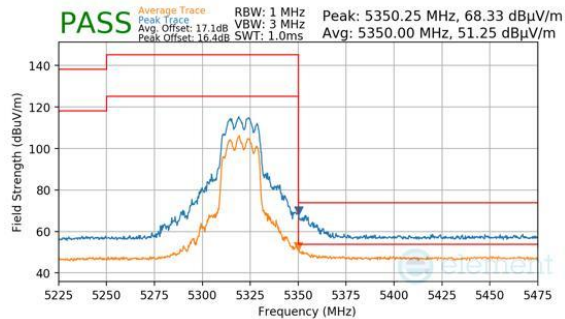


Plot 7-451. CDD Diversity (Peak & Average, Ch.64, 802.11be(SU), MCS11)

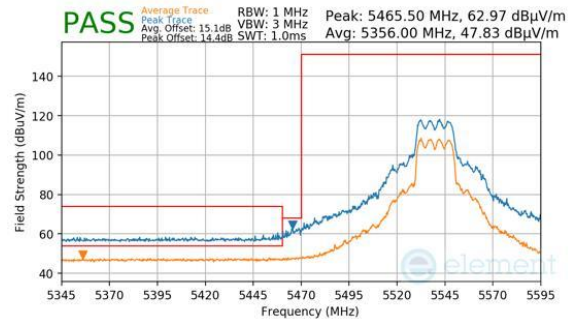


Plot 7-454. CDD Diversity (Peak & Average, Ch.108, 802.11be(SU), MCS11)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device		Page 226 of 255

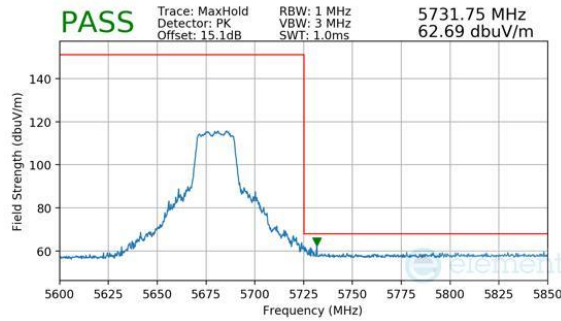


Plot 7-455. CDD Diversity (Peak, Ch.136, 802.11be(SU), MCS11)

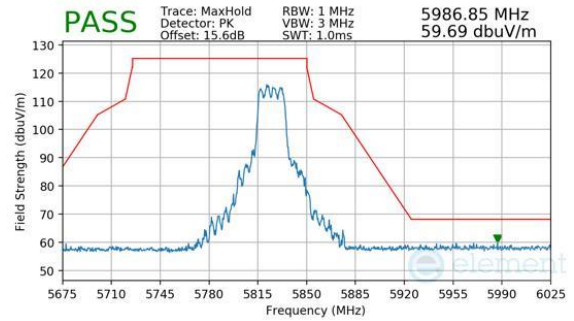

Plot 7-458. CDD Diversity (Peak, Ch.165, 802.11be(SU), MCS11)

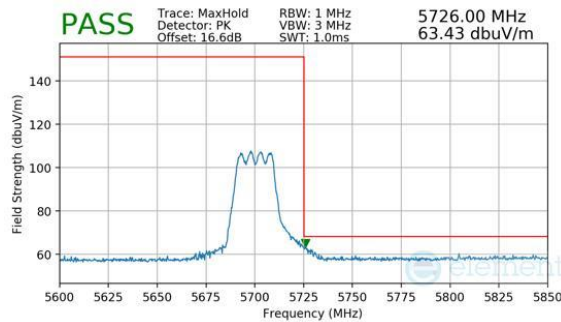


Plot 7-456. CDD Diversity (Peak, Ch.140, 802.11be(SU), MCS11)

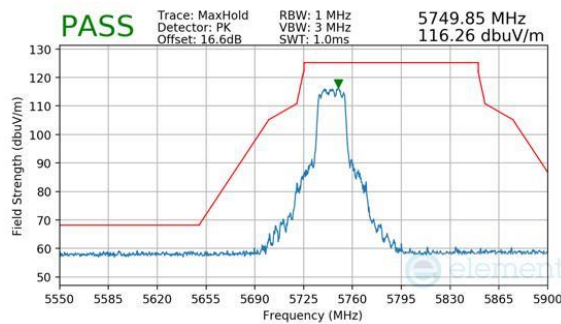


Plot 7-457. CDD Diversity (Peak, Ch.149, 802.11be(SU), MCS11)

FCC ID: BCGA3361 IC: 579C-A3361	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 227 of 255


7.6.21 CDD Diversity Radiated Band Edge Measurements (40MHz BW)

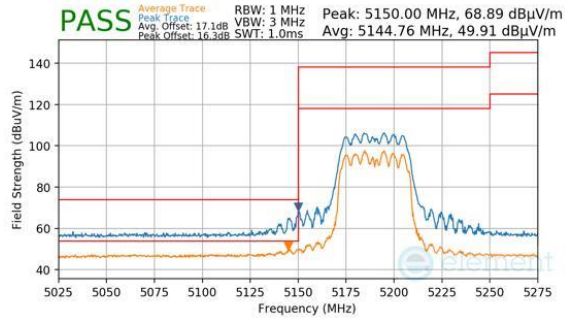


Plot 7-459. CDD Diversity (Peak & Average, Ch.38, 802.11n, MCS7)

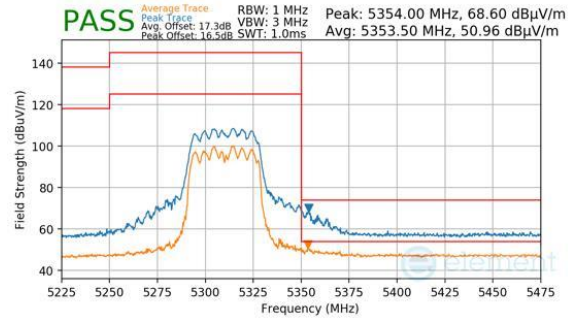


Plot 7-462. CDD Diversity (Peak & Average, Ch.62, 802.11n, MCS7)

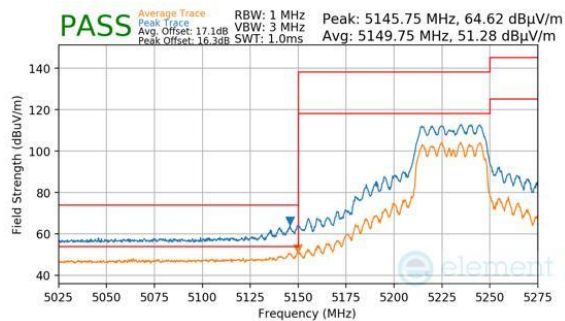


Plot 7-460. CDD Diversity (Peak & Average, Ch.46, 802.11n, MCS7)

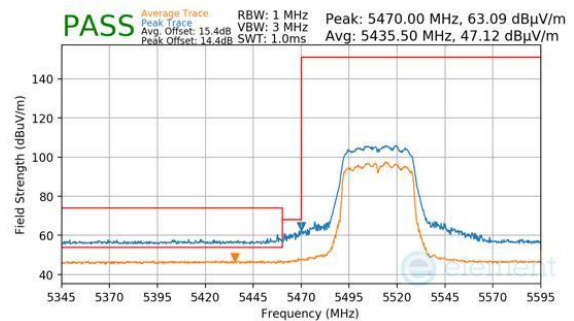

Plot 7-463. CDD Diversity (Peak & Average, Ch.102, 802.11n, MCS7)

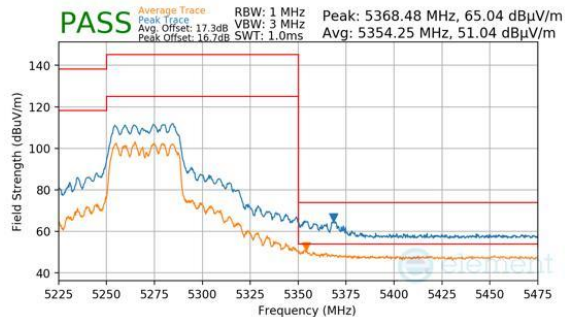


Plot 7-461. CDD Diversity (Peak & Average, Ch.54, 802.11n, MCS7)

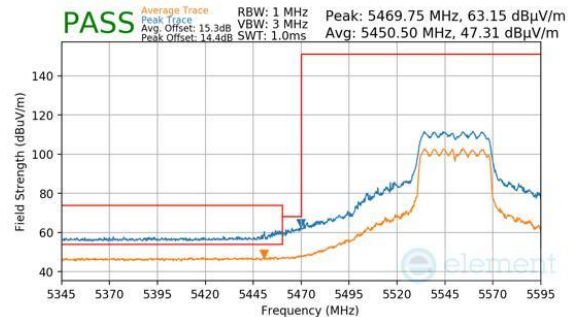


Plot 7-464. CDD Diversity (Peak & Average, Ch.110, 802.11n, MCS7)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device		Page 228 of 255

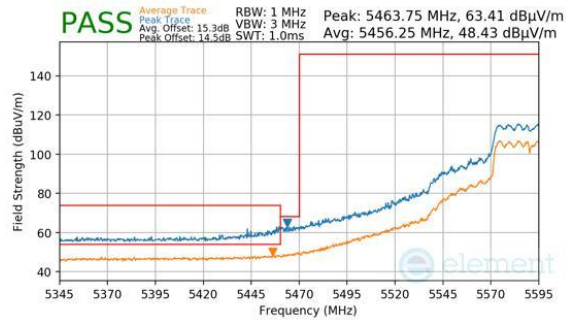


Plot 7-465. CDD Diversity (Peak & Average, Ch.118 (FCC ONLY), 802.11n, MCS7)

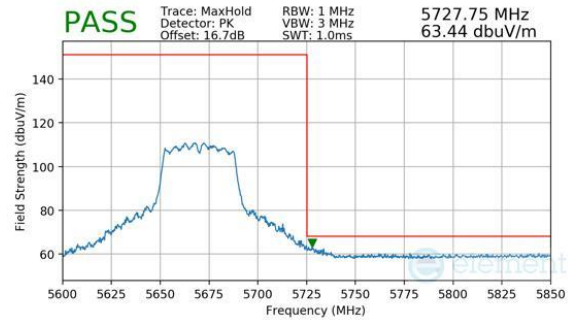


Plot 7-468. CDD Diversity (Peak, Ch.134, 802.11n, MCS7)

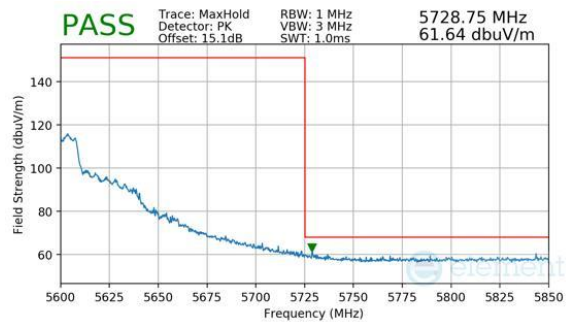


Plot 7-466. CDD Diversity (Peak, Ch.118 (FCC ONLY), 802.11n, MCS7)

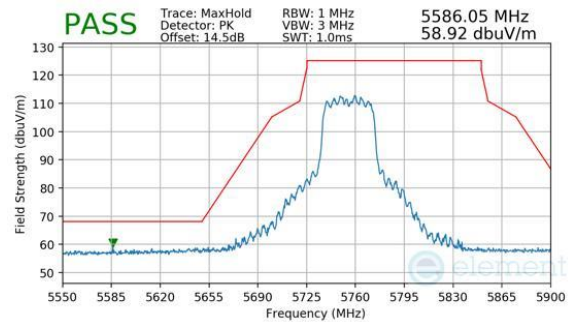

Plot 7-469. CDD Diversity (Peak, Ch.151, 802.11n, MCS7)

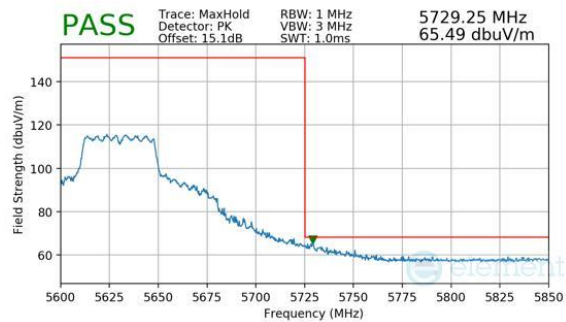


Plot 7-467. CDD Diversity (Peak, Ch.126 (FCC ONLY), 802.11n, MCS7)

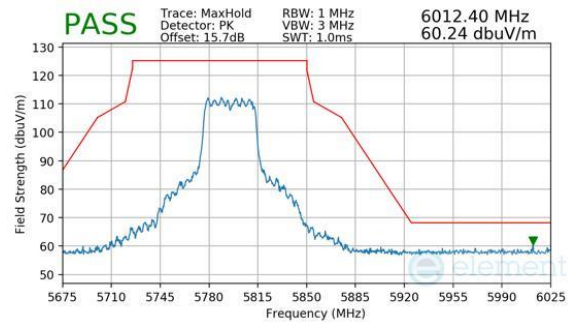


Plot 7-470. CDD Diversity (Peak, Ch.159, 802.11n, MCS7)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 229 of 255

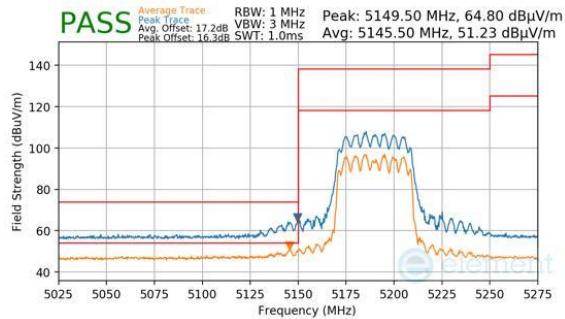


Plot 7-471. CDD Diversity (Peak & Average, Ch.38, 802.11be(SU), MCS11)

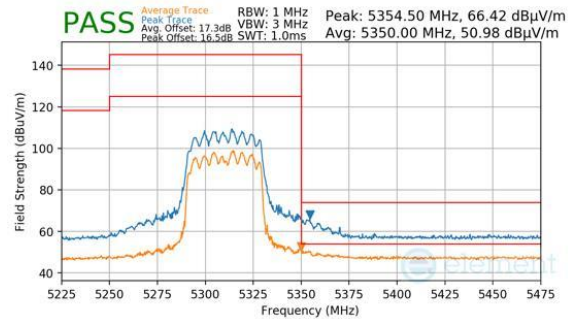


Plot 7-474. CDD Diversity (Peak & Average, Ch.62, 802.11be(SU), MCS11)

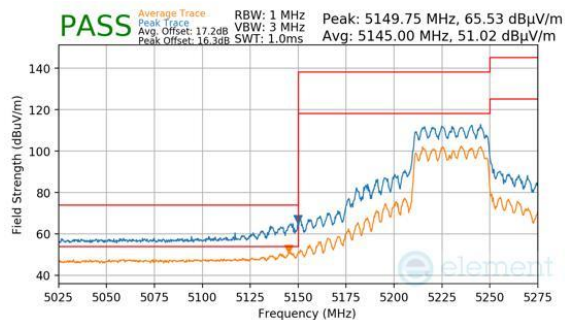


Plot 7-472. CDD Diversity (Peak & Average, Ch.46, 802.11be(SU), MCS11)

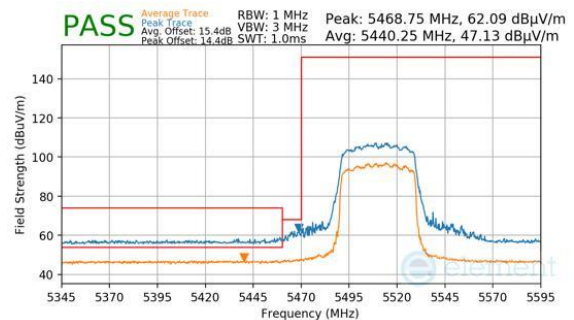

Plot 7-475. CDD Diversity (Peak & Average, Ch.102, 802.11be(SU), MCS11)

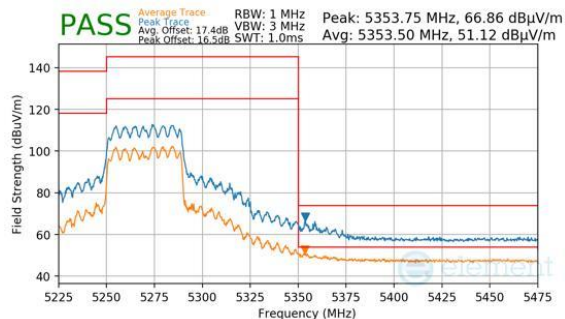


Plot 7-473. CDD Diversity (Peak & Average, Ch.54, 802.11be(SU), MCS11)

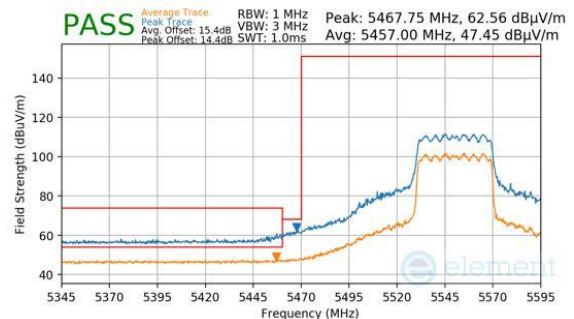


Plot 7-476. CDD Diversity (Peak & Average, Ch.110, 802.11be(SU), MCS11)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 230 of 255

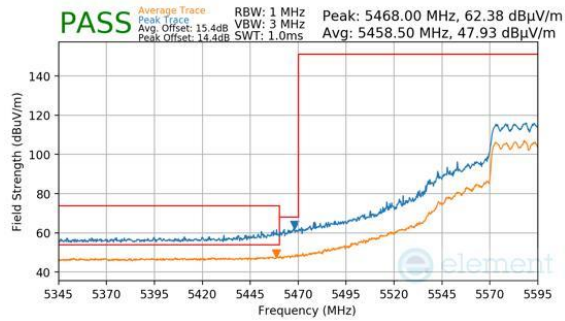


Plot 7-477. CDD Diversity (Peak & Average, Ch.118 (FCC ONLY), 802.11be(SU), MCS11)

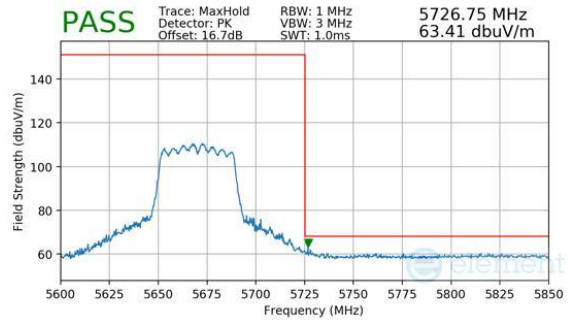


Plot 7-480. CDD Diversity (Peak, Ch.134, 802.11be(SU), MCS11)

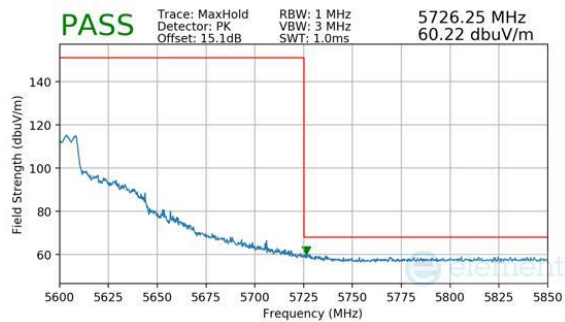


Plot 7-478. CDD Diversity (Peak, Ch.118 (FCC ONLY), 802.11be(SU), MCS11)

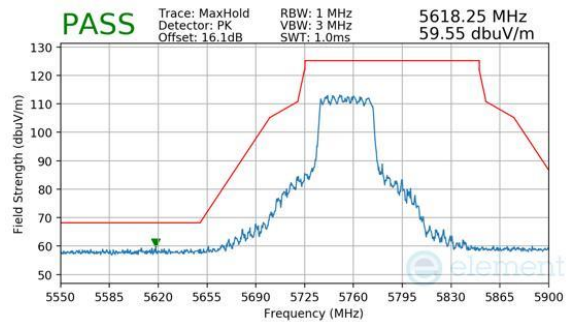

Plot 7-481. CDD Diversity (Peak, Ch.151, 802.11be(SU), MCS11)

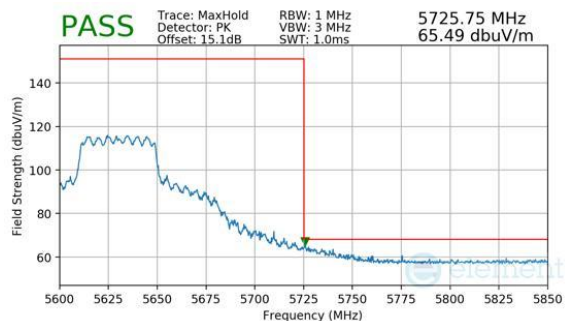


Plot 7-479. CDD Diversity (Peak, Ch.126 (FCC ONLY), 802.11be(SU), MCS11)

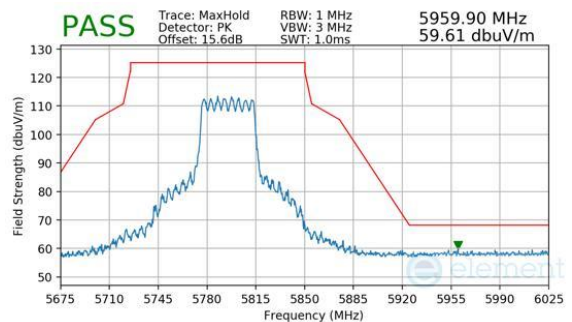


Plot 7-482. CDD Diversity (Peak, Ch.159, 802.11be(SU), MCS11)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 231 of 255


7.6.22 CDD Diversity Radiated Band Edge Measurements (80MHz BW)

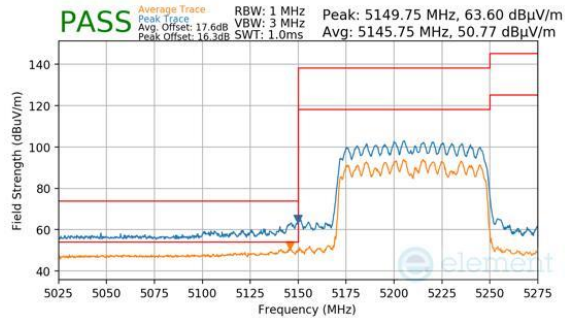


Plot 7-483. CDD Diversity (Peak & Average, Ch.42, 802.11ac, MCS9)

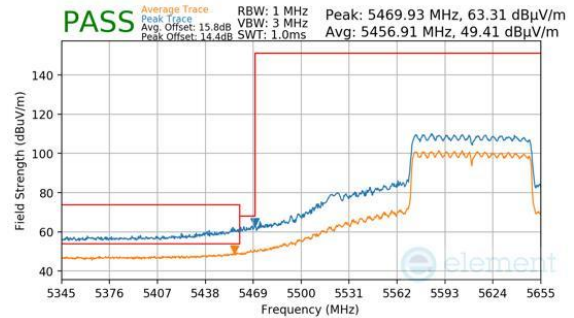


Plot 7-486. CDD Diversity (Peak & Average, Ch.122 (FCC ONLY), 802.11ac, MCS9)

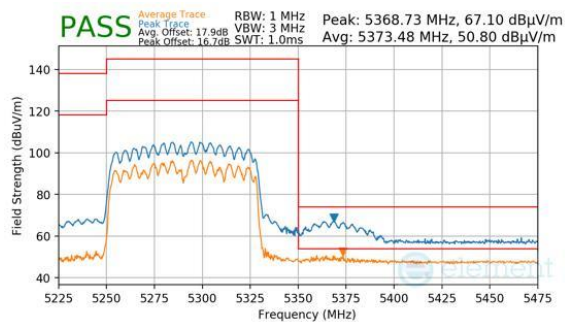


Plot 7-484. CDD Diversity (Peak & Average, Ch.58, 802.11ac, MCS9)

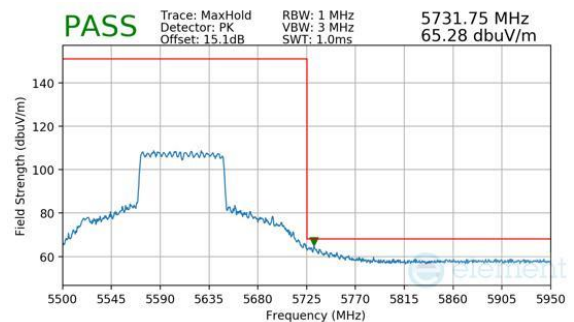

Plot 7-487. CDD Diversity (Peak, Ch.122 (FCC ONLY), 802.11ac, MCS9)

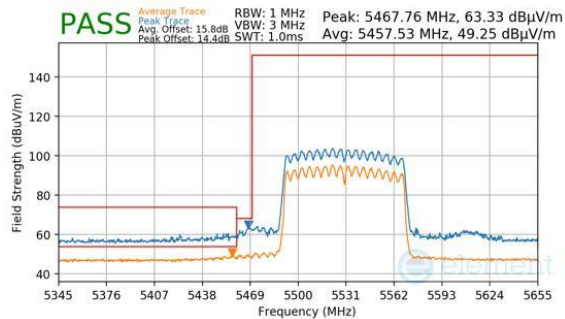


Plot 7-485. CDD Diversity (Peak & Average, Ch.106, 802.11ac, MCS9)

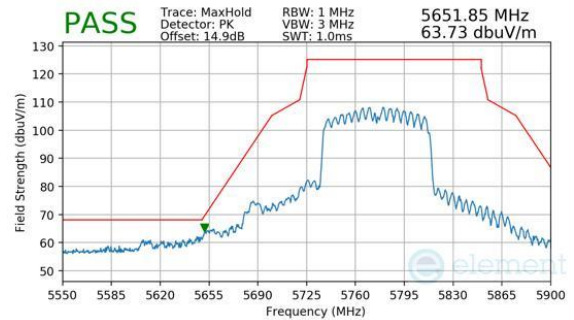


Plot 7-488. CDD Diversity (Peak, Ch.155, 802.11ac, MCS9)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 232 of 255

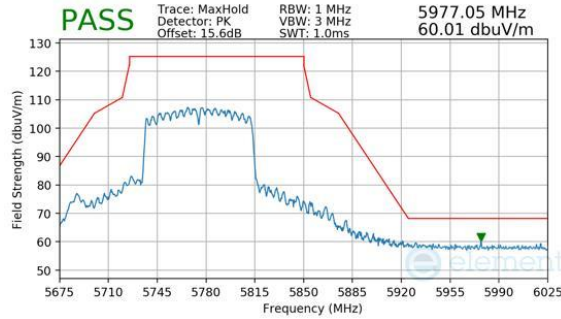


Plot 7-489. CDD Diversity (Peak, Ch.155, 802.11ac, MCS9)

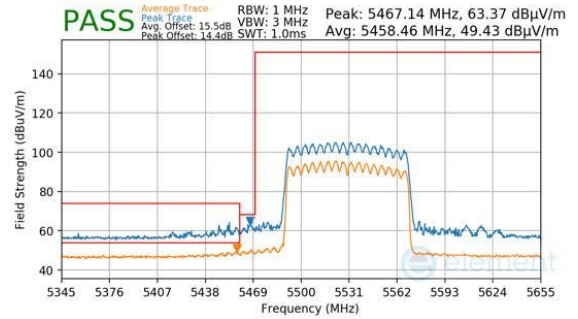


Plot 7-492. CDD Diversity (Peak & Average, Ch.106, 802.11be(SU), MCS11)

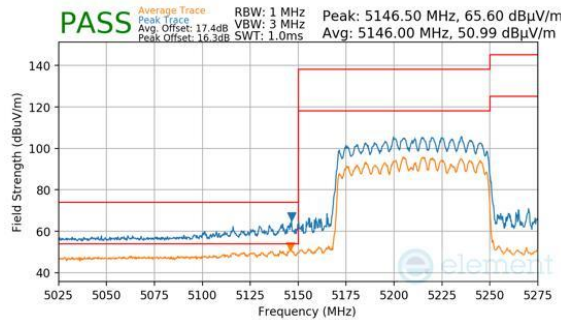


Plot 7-490. CDD Diversity (Peak & Average, Ch.42, 802.11be(SU), MCS11)

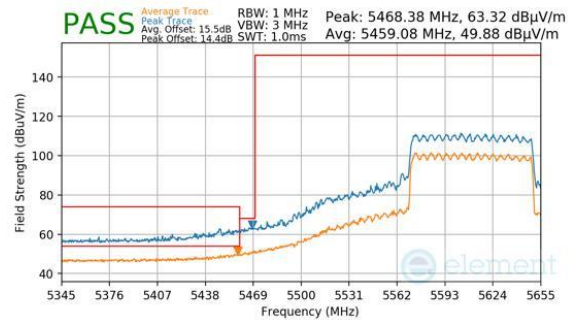

Plot 7-493. CDD Diversity (Peak & Average, Ch.122 (FCC ONLY), 802.11be(SU), MCS11)

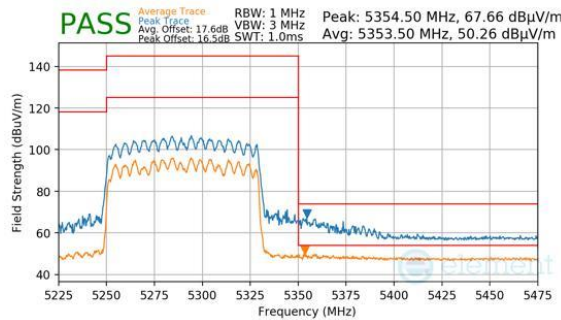


Plot 7-491. CDD Diversity (Peak & Average, Ch.58, 802.11be(SU), MCS11)

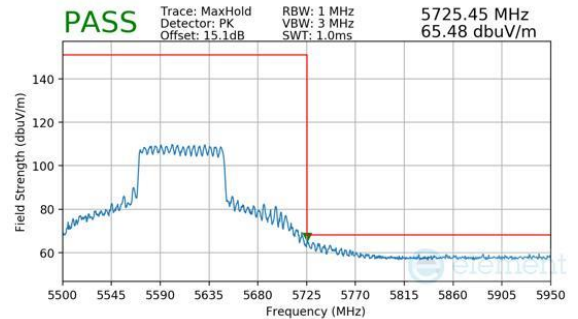


Plot 7-494. CDD Diversity (Peak, Ch.122 (FCC ONLY), 802.11be(SU), MCS11)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 233 of 255

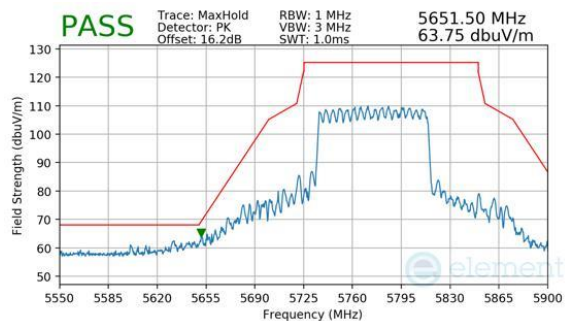


Plot 7-495. CDD Diversity (Peak, Ch.155, 802.11be(SU), MCS11)

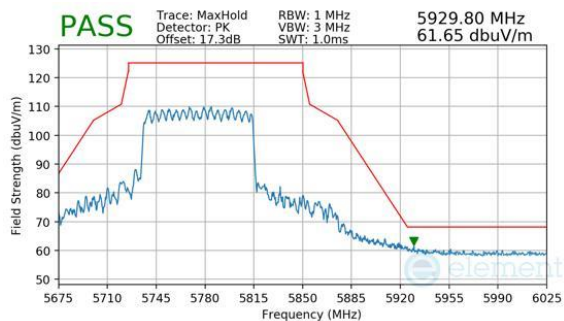


Plot 7-496. CDD Diversity (Peak, Ch.155, 802.11be(SU), MCS11)

FCC ID: BCGA3361 IC: 579C-A3361	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 234 of 255


7.6.23 CDD Diversity Radiated Band Edge Measurements (160MHz BW)

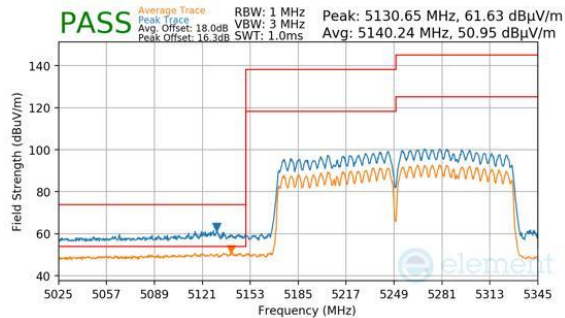


Plot 7-497. CDD Diversity (Peak & Average, Ch.50, 802.11ac, MCS9)

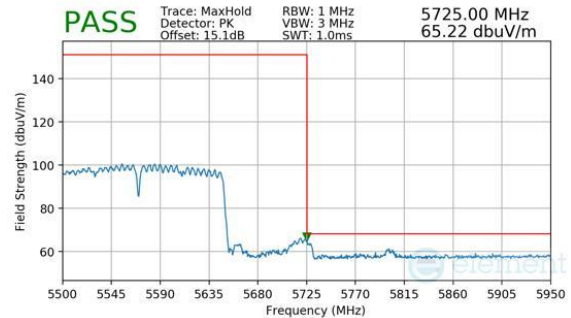


Plot 7-500. CDD Diversity (Peak, Ch.114 (FCC ONLY), 802.11ac, MCS9)

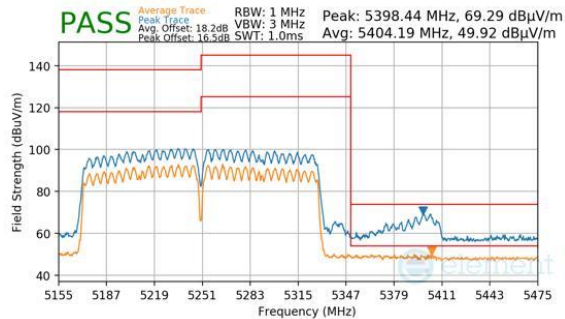


Plot 7-498. CDD Diversity (Peak & Average, Ch.50, 802.11ac, MCS9)

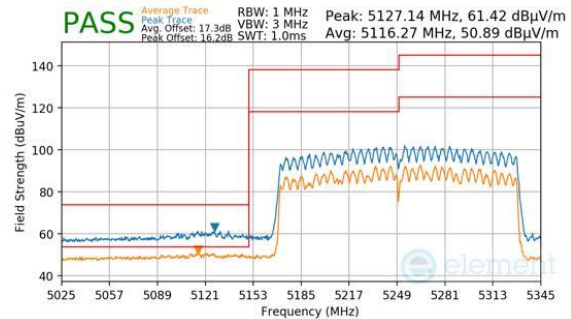

Plot 7-501. CDD Diversity (Peak & Average, Ch.50, 802.11be(SU), MCS11)

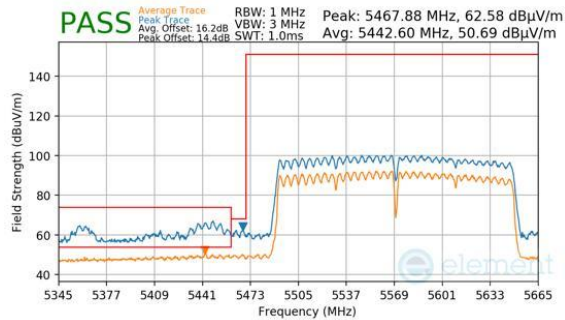


Plot 7-499. CDD Diversity (Peak & Average, Ch.114 (FCC ONLY), 802.11ac, MCS9)

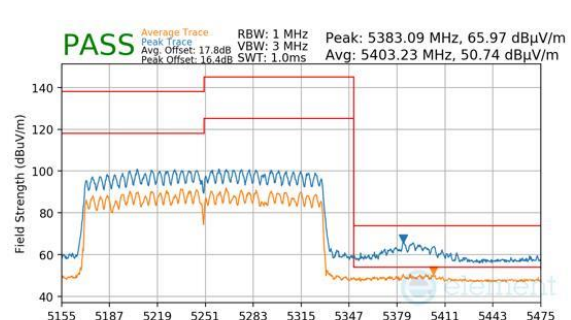


Plot 7-502. CDD Diversity (Peak & Average, Ch.50, 802.11be(SU), MCS11)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 235 of 255

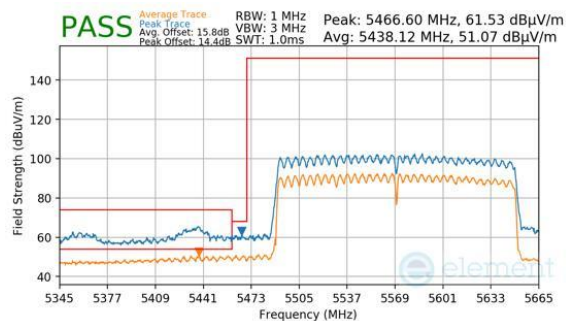

Plot 7-503. CDD Diversity (Peak & Average, Ch.114 (FCC ONLY), 802.11be(SU), MCS11)

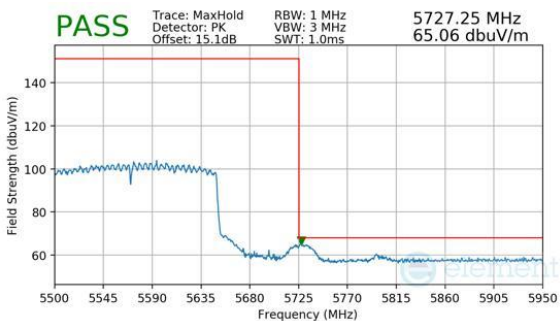

Plot 7-504. CDD Diversity (Peak, Ch.114 (FCC ONLY), 802.11be(SU), MCS11)

FCC ID: BCGA3361 IC: 579C-A3361	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 236 of 255

7.7 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-165 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-165. Radiated Limits

Test Procedures Used

ANSI C63.10-2020

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = quasi-peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 237 of 255

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

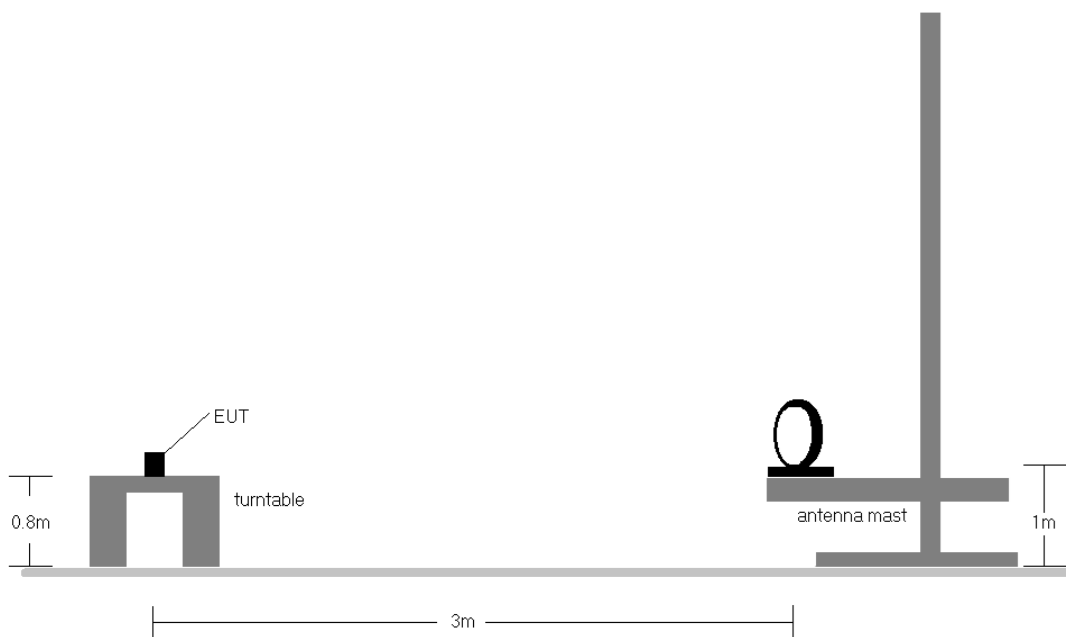


Figure 7-6. Radiated Test Setup < 30MHz

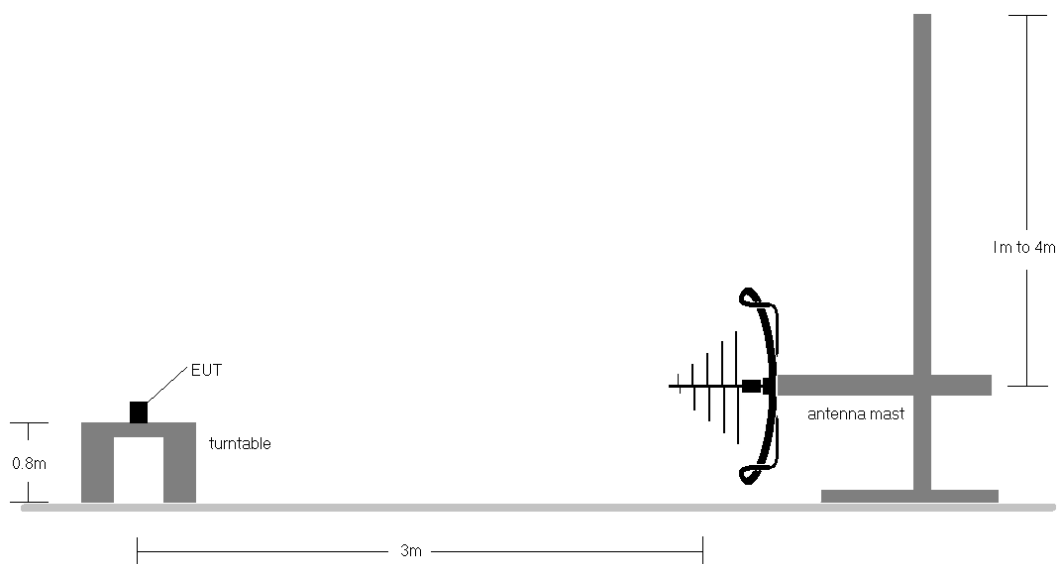


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 238 of 255

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-165.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
10. All antenna configurations were investigated and only the worst case is reported.
11. The unit was tested with all possible modes and only the highest emission is reported.


Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]} - \text{Preamp Gain}_{[dB]}$
- $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 239 of 255

7.7.1 CDD Primary Radiated Spurious Emissions Measurements (Below 1GHz)

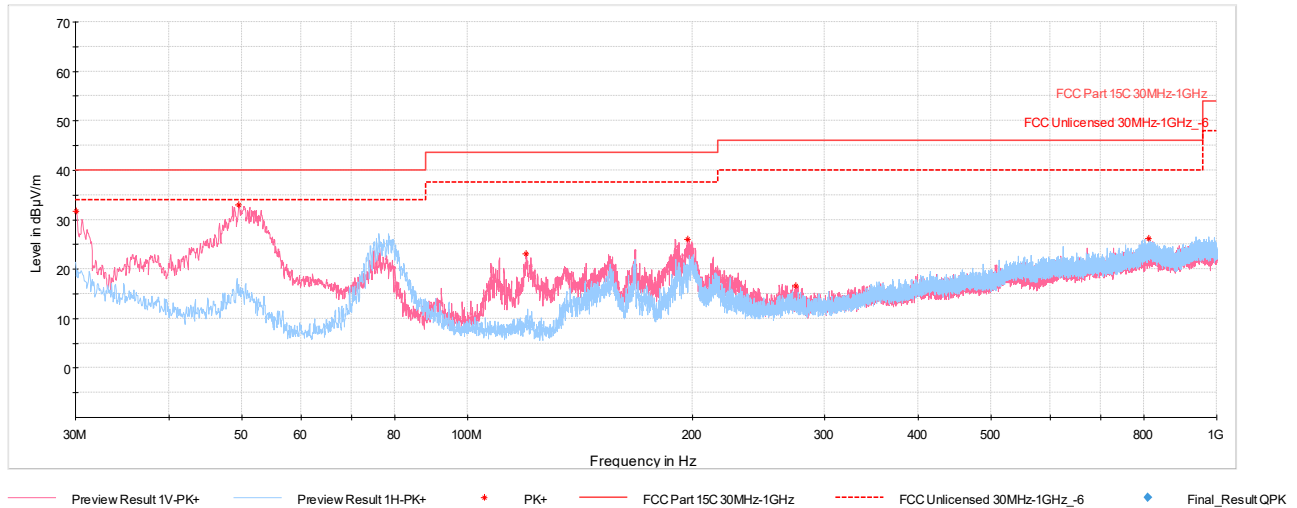


Plot 7-505. Radiated Spurious Emissions below 1GHz CDD Primary, 802.11n, Ch.40 with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
30.05	Max Peak	V	100	226	-60.68	-14.58	31.74	40.00	-8.26
49.55	Max Peak	V	100	0	-50.73	-23.31	32.96	40.00	-7.04
119.77	Max Peak	V	100	341	-62.02	-21.89	23.09	43.52	-20.43
196.60	Max Peak	V	100	286	-62.80	-18.17	26.03	43.52	-17.49
274.05	Max Peak	V	200	0	-75.13	-15.24	16.63	46.02	-29.39
810.80	Max Peak	H	100	218	-77.45	-3.28	26.27	46.02	-19.75

Table 7-166. Radiated Spurious Emissions below 1GHz, 802.11n, Ch.40 with AC/DC Adapter

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 240 of 255

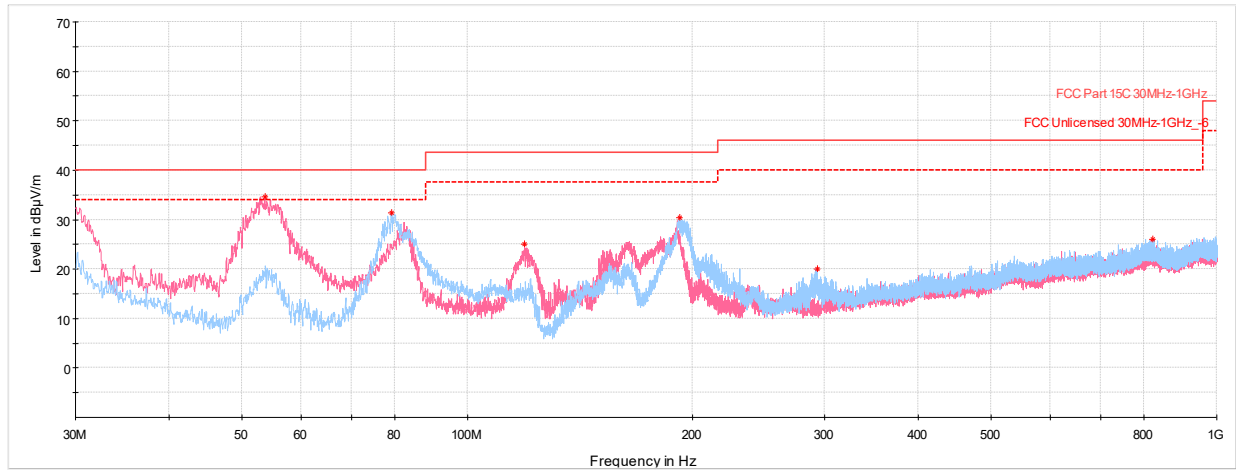


Plot 7-506. Radiated Spurious Emissions below 1GHz CDD Primary, 802.11be (SU), Ch.40 with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
53.67	QuasiPeak	V	107	2	-52.02	-22.22	32.76	40.00	-7.24
79.28	Max Peak	H	300	75	-52.84	-22.83	31.33	40.00	-8.67
119.24	Max Peak	V	100	169	-60.09	-21.81	25.10	43.52	-18.42
192.28	Max Peak	H	100	156	-58.37	-18.19	30.44	43.52	-13.08
293.26	Max Peak	H	100	225	-71.72	-15.33	19.95	46.02	-26.07
820.70	Max Peak	H	100	294	-77.59	-3.33	26.08	46.02	-19.94

Table 7-167. Radiated Spurious Emissions below 1GHz, 802.11be (SU), Ch.40 with AC/DC Adapter

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 241 of 255

7.7.2 CDD Diversity Radiated Spurious Emissions Measurements (Below 1GHz)

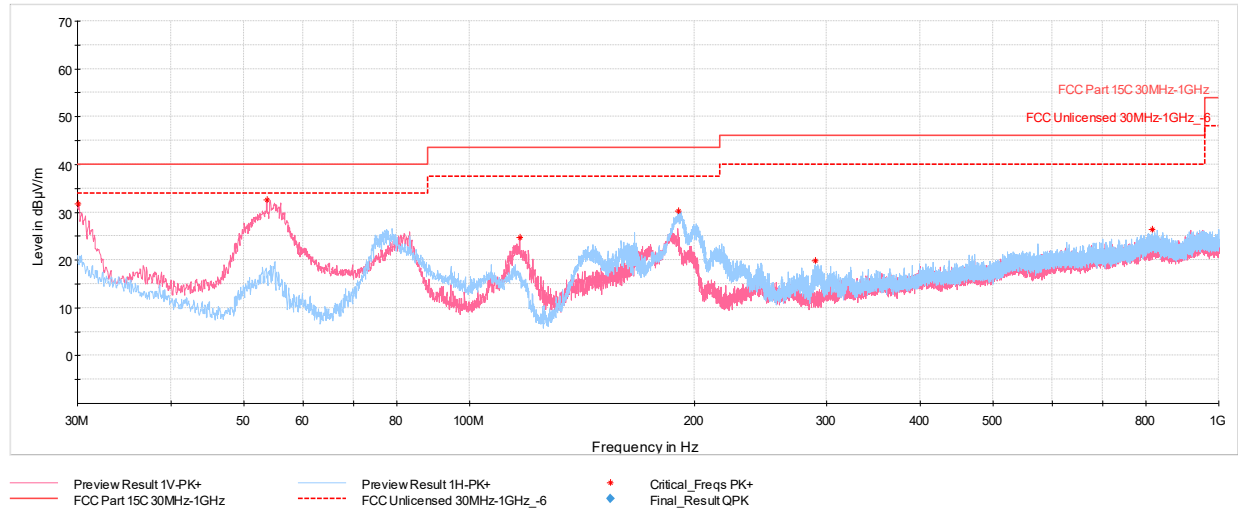


Plot 7-507. Radiated Spurious Emissions below 1GHz CDD Diversity, 802.11n, Ch.40 with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
30.10	Max Peak	V	100	112	-60.65	-14.66	31.69	40.00	-8.31
53.67	Max Peak	V	100	287	-52.26	-22.22	32.52	40.00	-7.48
116.77	Max Peak	V	100	145	-60.86	-21.50	24.64	43.52	-18.88
190.24	Max Peak	H	200	27	-58.52	-18.26	30.22	43.52	-13.30
289.77	Max Peak	H	100	272	-71.68	-15.55	19.77	46.02	-26.25
815.65	Max Peak	H	200	160	-77.26	-3.35	26.39	46.02	-19.63

Table 7-168. Radiated Spurious Emissions below 1GHz, 802.11n, Ch.40 with AC/DC Adapter

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 242 of 255

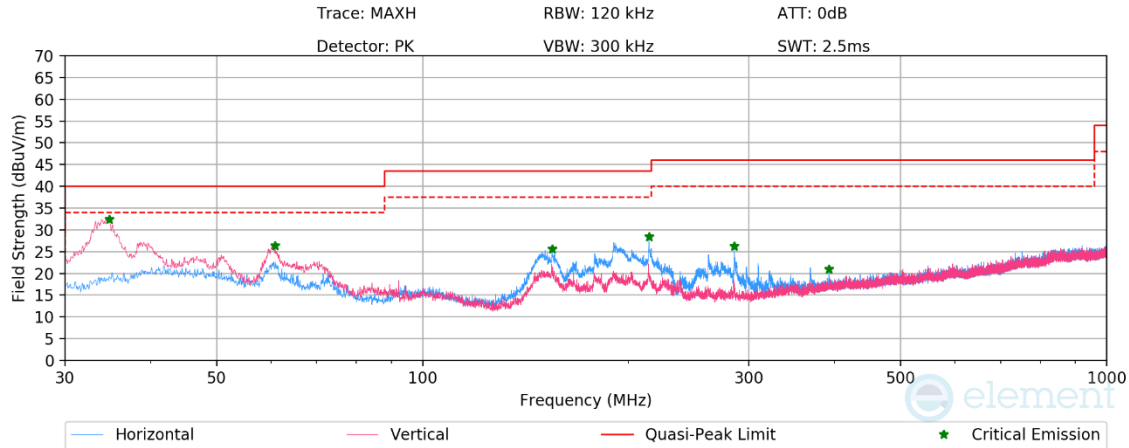

Plot 7-508. Radiated Spurious Emissions below 1GHz CDD Diversity, 802.11be (SU), Ch.40 with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
34.80	Max-Peak	V	100	168	-58.71	-15.88	32.40	40.00	-7.60
60.78	Max-Peak	V	200	0	-65.96	-14.65	26.39	40.00	-13.61
154.57	Max-Peak	H	200	156	-63.73	-17.69	25.58	43.50	-17.92
214.21	Max-Peak	H	200	355	-63.97	-14.63	28.41	43.50	-15.09
285.61	Max-Peak	H	100	90	-68.49	-12.29	26.22	46.00	-19.78
392.77	Max-Peak	H	100	354	-76.77	-9.26	20.97	46.00	-25.03


Table 7-169. Radiated Spurious Emissions below 1GHz, 802.11be (SU), Ch.40 with AC/DC Adapter

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 243 of 255

7.7.3 Simultaneous TX Radiated Spurious Emissions Measurements (Below 1GHz)

Description	Bluetooth	UNII
Antenna	Antenna 4a	Antenna 4a
Channel	78	36
Operating Frequency (MHz)	2480	5180
Mode/Modulation	GFSK ePA	802.11n

Table 7-170. Worst Case Simultaneous Transmission Configuration

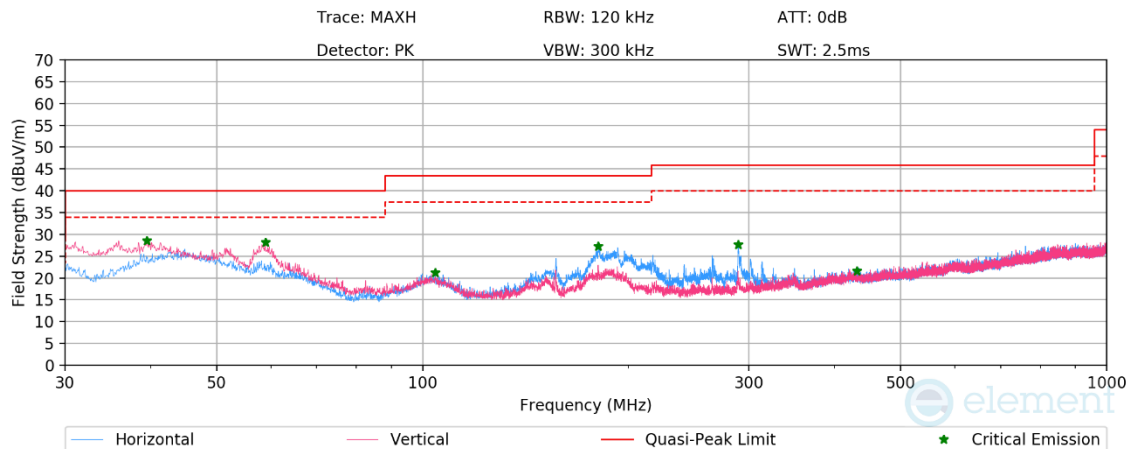

Plot 7-509. Radiated Spurious Emissions – Simultaneous Transmission 30MHz – 1GHz, with AC/DC Adapter)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
39.54	Max-Peak	V	100	96	-61.57	-16.81	28.62	40.00	-11.38
58.86	Max-Peak	V	100	54	-62.31	-16.49	28.20	40.00	-11.80
104.28	Max-Peak	H	300	198	-67.89	-17.93	21.18	43.50	-22.32
180.67	Max-Peak	H	100	193	-60.30	-19.42	27.27	43.50	-16.23
289.33	Max-Peak	H	100	152	-63.79	-15.59	27.62	46.00	-18.38
431.06	Max-Peak	V	200	14	-73.17	-12.18	21.66	46.00	-24.34

Table 7-171. Radiated Spurious Emissions – Simultaneous Transmission 30MHz – 1GHz, with AC/DC Adapter)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 244 of 255

7.8 AC Line-Conducted Emissions Measurement

§15.407; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-172. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 245 of 255

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

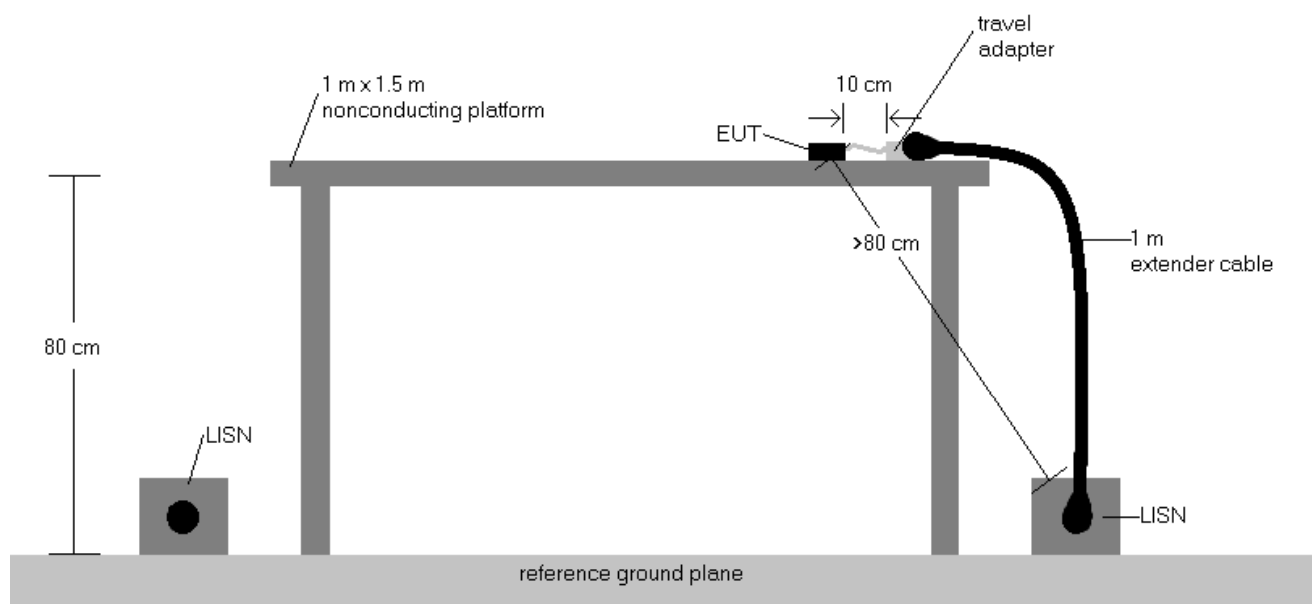



Figure 7-8. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.
9. The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 246 of 255

7.8.1 CDD Primary AC Line-Conducted Emissions Measurement

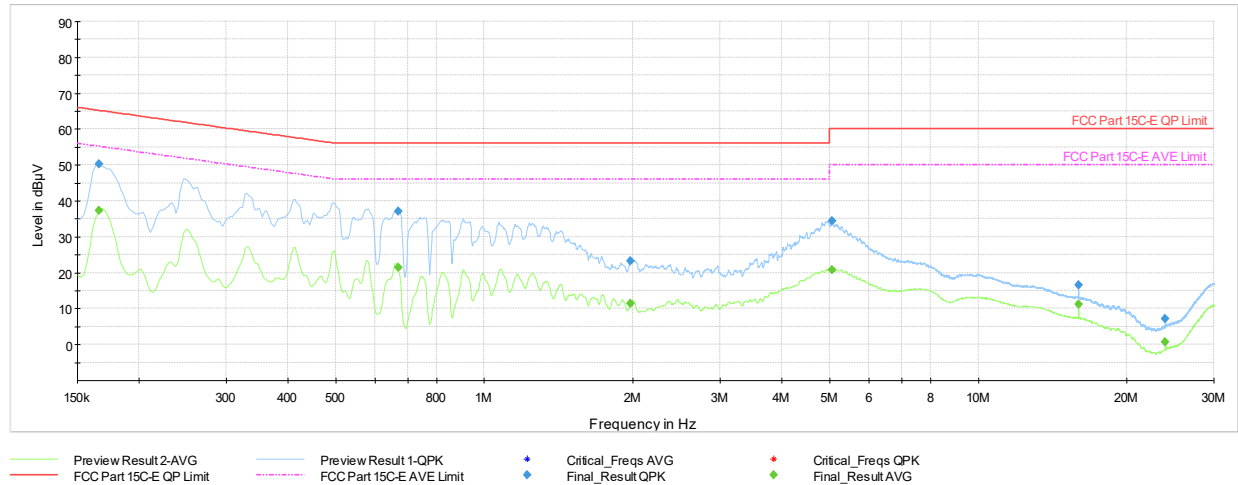


Plot 7-510. AC Line Conducted Plot with 802.11n CDD Primary – Ch.40 (L1), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	---	37.41	55.17	-17.76	L1	GND
0.17	FINAL	50.35	---	65.17	-14.82	L1	GND
0.67	FINAL	---	21.46	46.00	-24.54	L1	GND
0.67	FINAL	37.10	---	56.00	-18.90	L1	GND
1.97	FINAL	---	11.38	46.00	-34.62	L1	GND
1.97	FINAL	23.30	---	56.00	-32.70	L1	GND
5.06	FINAL	34.40	---	60.00	-25.60	L1	GND
5.06	FINAL	---	20.86	50.00	-29.14	L1	GND
15.96	FINAL	16.48	---	60.00	-43.52	L1	GND
15.96	FINAL	---	11.19	50.00	-38.81	L1	GND
23.93	FINAL	---	0.71	50.00	-49.29	L1	GND
23.93	FINAL	7.10	---	60.00	-52.90	L1	GND

Table 7-173. AC Line Conducted Data with 802.11n CDD Primary – Ch.40 (L1) with AC/DC adapter

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 247 of 255

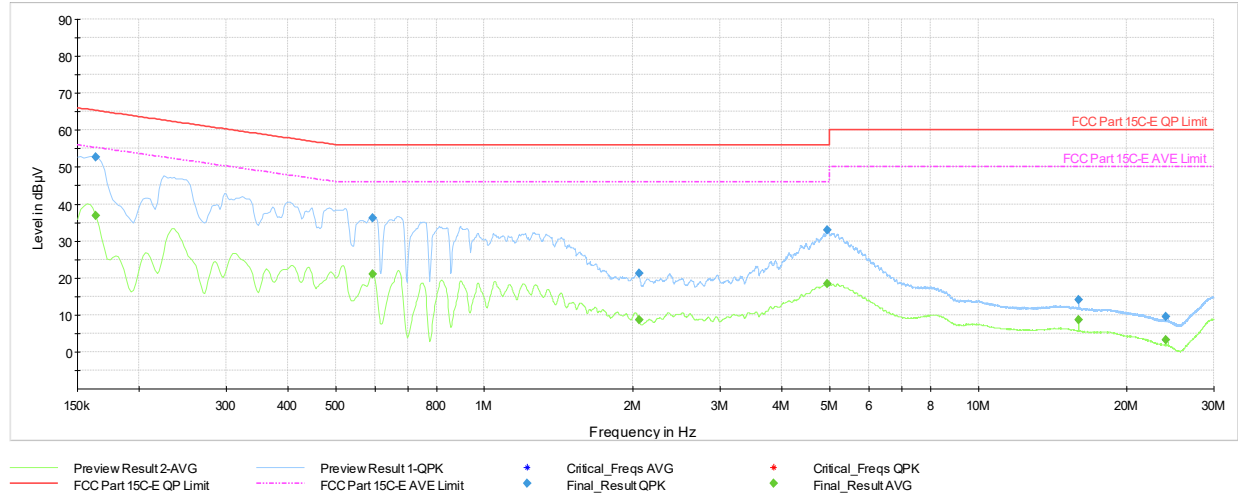


Plot 7-511. AC Line Conducted Plot with 802.11n CDD Primary – Ch.40 (N), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.16	FINAL	---	36.76	55.28	-18.52	N	GND
0.16	FINAL	52.58	---	65.28	-12.70	N	GND
0.59	FINAL	---	21.09	46.00	-24.91	N	GND
0.59	FINAL	36.27	---	56.00	-19.73	N	GND
2.06	FINAL	---	8.61	46.00	-37.39	N	GND
2.06	FINAL	21.25	---	56.00	-34.75	N	GND
4.94	FINAL	32.92	---	56.00	-23.08	N	GND
4.94	FINAL	---	18.37	46.00	-27.63	N	GND
15.96	FINAL	14.13	---	60.00	-45.87	N	GND
15.96	FINAL	---	8.57	50.00	-41.43	N	GND
23.94	FINAL	---	3.24	50.00	-46.76	N	GND
23.94	FINAL	9.54	---	60.00	-50.46	N	GND

Table 7-174. AC Line Conducted Data with 802.11n CDD Primary – Ch.40 (N), with AC/DC adapter

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 248 of 255

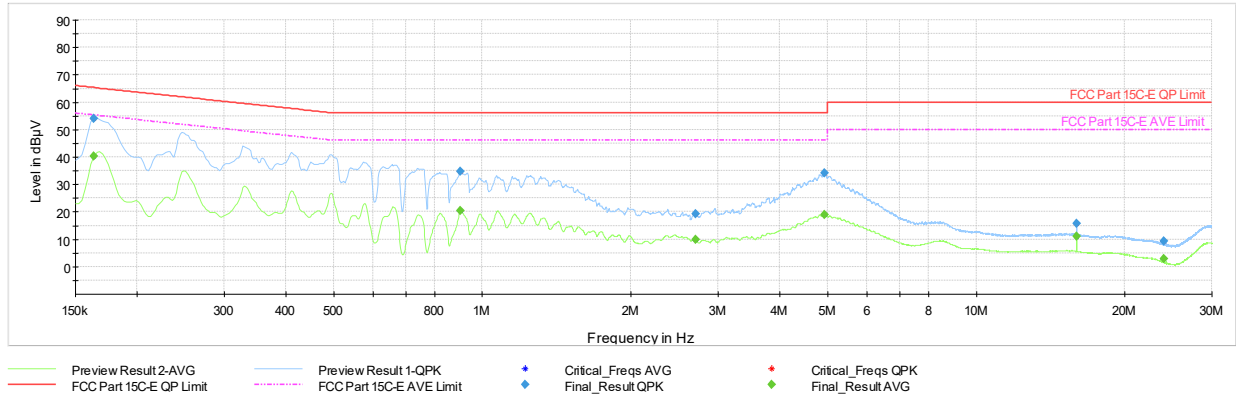


Plot 7-512. AC Line Conducted Plot with 802.11be(SU) CDD Primary – Ch.40 (L1), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.16	FINAL	---	40.21	55.28	-15.07	L1	GND
0.16	FINAL	54.14	---	65.28	-11.14	L1	GND
0.90	FINAL	---	20.36	46.00	-25.64	L1	GND
0.90	FINAL	34.64	---	56.00	-21.36	L1	GND
2.70	FINAL	---	9.85	46.00	-36.15	L1	GND
2.70	FINAL	19.24	---	56.00	-36.76	L1	GND
4.94	FINAL	34.07	---	56.00	-21.93	L1	GND
4.94	FINAL	---	18.84	46.00	-27.16	L1	GND
15.96	FINAL	15.70	---	60.00	-44.30	L1	GND
15.96	FINAL	---	11.13	50.00	-38.87	L1	GND
23.94	FINAL	---	3.01	50.00	-46.99	L1	GND
23.94	FINAL	9.40	---	60.00	-50.60	L1	GND

Table 7-175. AC Line Conducted Data with 802.11be(SU) CDD Primary – Ch.40 (L1) with AC/DC adapter

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 249 of 255

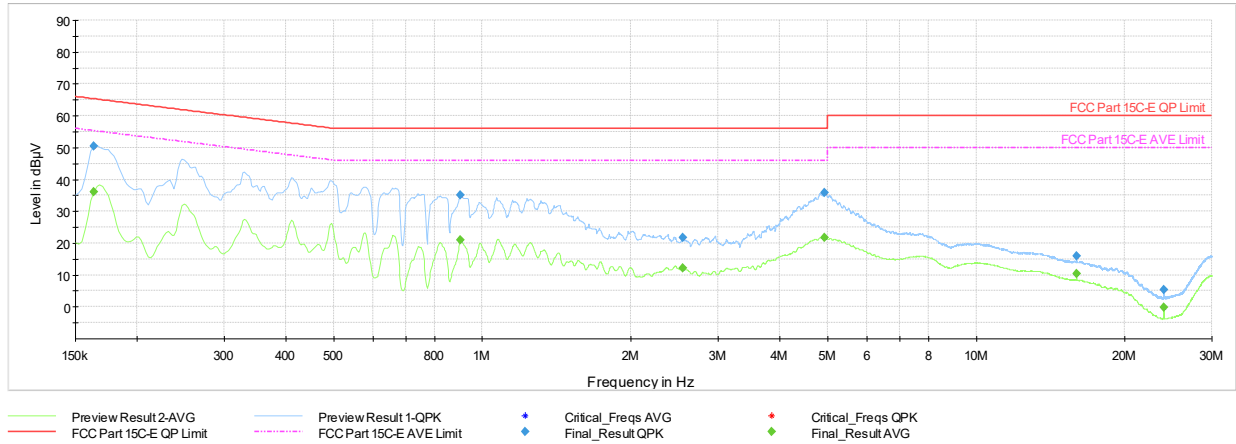


Plot 7-513. AC Line Conducted Plot with 802.11be(SU) CDD Primary – Ch.40 (N), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.16	FINAL	---	36.17	55.28	-19.11	N	GND
0.16	FINAL	50.49	---	65.28	-14.79	N	GND
0.90	FINAL	---	20.90	46.00	-25.10	N	GND
0.90	FINAL	35.10	---	56.00	-20.90	N	GND
2.54	FINAL	---	12.14	46.00	-33.86	N	GND
2.54	FINAL	21.84	---	56.00	-34.16	N	GND
4.94	FINAL	35.76	---	56.00	-20.24	N	GND
4.94	FINAL	---	21.76	46.00	-24.24	N	GND
15.97	FINAL	15.85	---	60.00	-44.15	N	GND
15.97	FINAL	---	10.38	50.00	-39.62	N	GND
23.95	FINAL	---	-0.23	50.00	-50.23	N	GND
23.95	FINAL	5.45	---	60.00	-54.55	N	GND

Table 7-176. AC Line Conducted Data with 802.11be(SU) CDD Primary – Ch.40 (N), with AC/DC adapter

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 250 of 255

7.8.2 CDD Diversity AC Line-Conducted Emissions Measurement

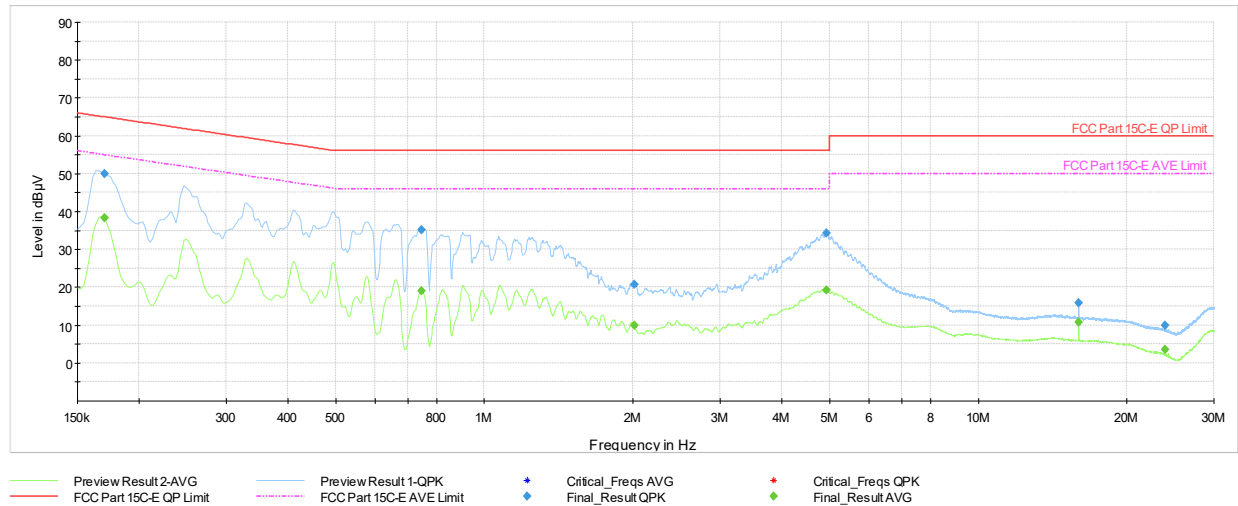


Plot 7-514. AC Line Conducted Plot with 802.11n CDD Diversity – Ch.40 (L1), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.17	FINAL	---	38.21	54.95	-16.74	L1	GND
0.17	FINAL	49.85	---	64.95	-15.10	L1	GND
0.75	FINAL	---	18.95	46.00	-27.05	L1	GND
0.75	FINAL	35.17	---	56.00	-20.83	L1	GND
2.01	FINAL	---	10.00	46.00	-36.00	L1	GND
2.01	FINAL	20.79	---	56.00	-35.21	L1	GND
4.94	FINAL	34.29	---	56.00	-21.71	L1	GND
4.94	FINAL	---	19.28	46.00	-26.72	L1	GND
15.95	FINAL	15.81	---	60.00	-44.19	L1	GND
15.95	FINAL	---	10.73	50.00	-39.27	L1	GND
23.93	FINAL	---	3.66	50.00	-46.34	L1	GND
23.93	FINAL	9.89	---	60.00	-50.11	L1	GND

Table 7-177. AC Line Conducted Data with 802.11n CDD Diversity – Ch.40 (L1) with AC/DC adapter

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 251 of 255

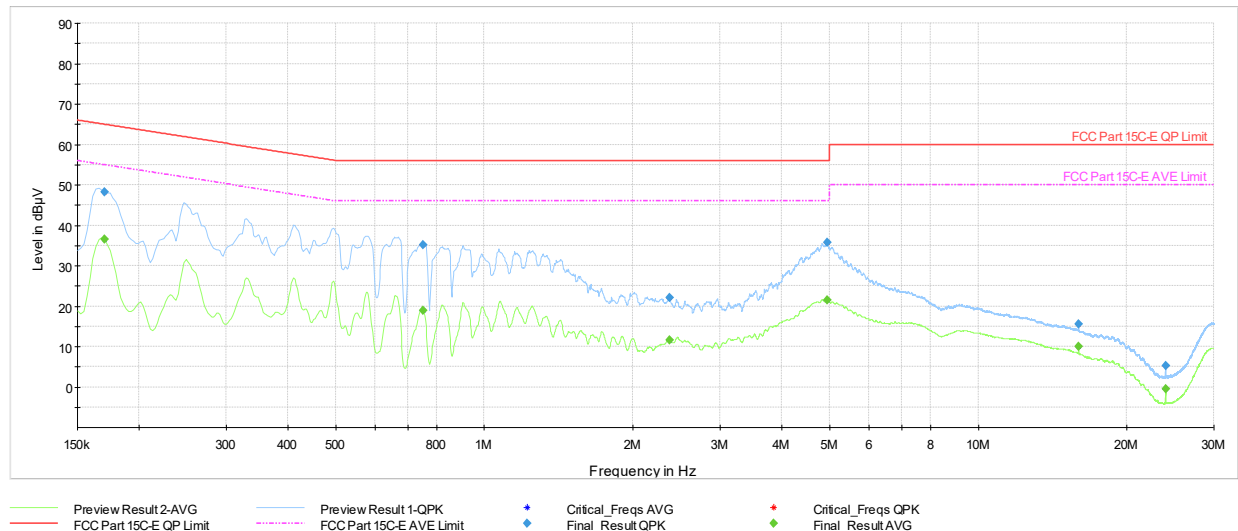


Plot 7-515. AC Line Conducted Plot with 802.11n CDD Diversity – Ch.40 (N), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.17	FINAL	---	36.56	54.95	-18.39	N	GND
0.17	FINAL	48.18	---	64.95	-16.77	N	GND
0.75	FINAL	---	18.84	46.00	-27.16	N	GND
0.75	FINAL	35.09	---	56.00	-20.91	N	GND
2.38	FINAL	---	11.53	46.00	-34.47	N	GND
2.38	FINAL	22.02	---	56.00	-33.98	N	GND
4.95	FINAL	35.67	---	56.00	-20.33	N	GND
4.95	FINAL	---	21.47	46.00	-24.53	N	GND
15.96	FINAL	15.62	---	60.00	-44.38	N	GND
15.96	FINAL	---	10.05	50.00	-39.95	N	GND
23.94	FINAL	---	-0.47	50.00	-50.47	N	GND
23.94	FINAL	5.17	---	60.00	-54.83	N	GND

Table 7-178. AC Line Conducted Data with 802.11n CDD Diversity – Ch.40 (N), with AC/DC adapter

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 252 of 255

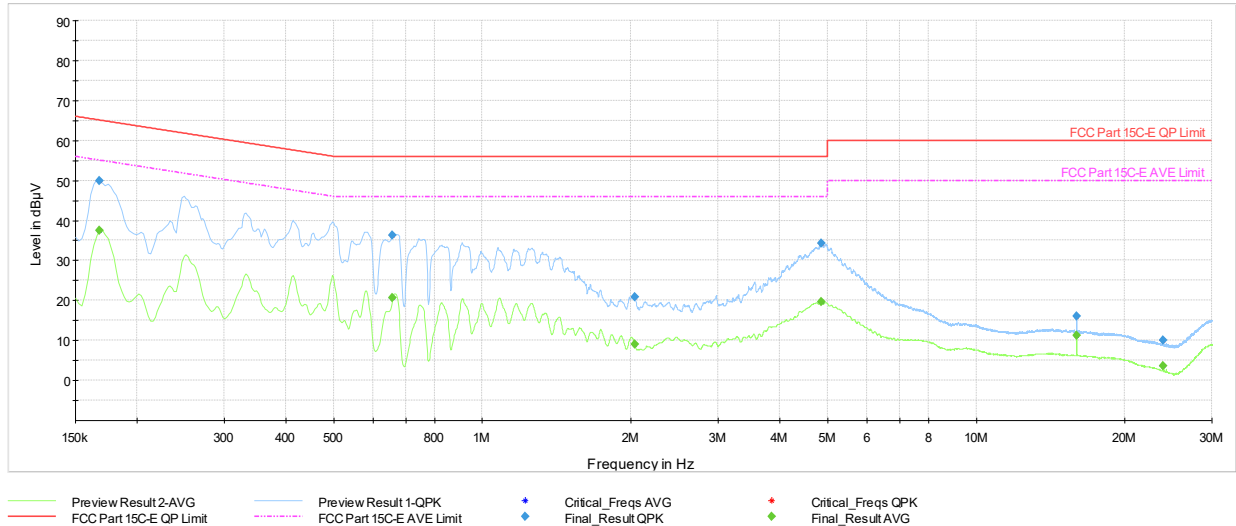


Plot 7-516. AC Line Conducted Plot with 802.11be(SU) CDD Diversity – Ch.40 (L1), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	---	37.43	55.06	-17.63	L1	GND
0.17	FINAL	49.87	---	65.06	-15.19	L1	GND
0.66	FINAL	---	20.58	46.00	-25.42	L1	GND
0.66	FINAL	36.34	---	56.00	-19.66	L1	GND
2.04	FINAL	---	8.99	46.00	-37.01	L1	GND
2.04	FINAL	20.90	---	56.00	-35.10	L1	GND
4.85	FINAL	34.26	---	56.00	-21.74	L1	GND
4.85	FINAL	---	19.67	46.00	-26.33	L1	GND
15.96	FINAL	16.00	---	60.00	-44.00	L1	GND
15.96	FINAL	---	11.26	50.00	-38.74	L1	GND
23.94	FINAL	---	3.69	50.00	-46.31	L1	GND
23.94	FINAL	10.14	---	60.00	-49.86	L1	GND

Table 7-179. AC Line Conducted Data with 802.11be(SU) CDD Diversity – Ch.40 (L1) with AC/DC adapter

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 253 of 255

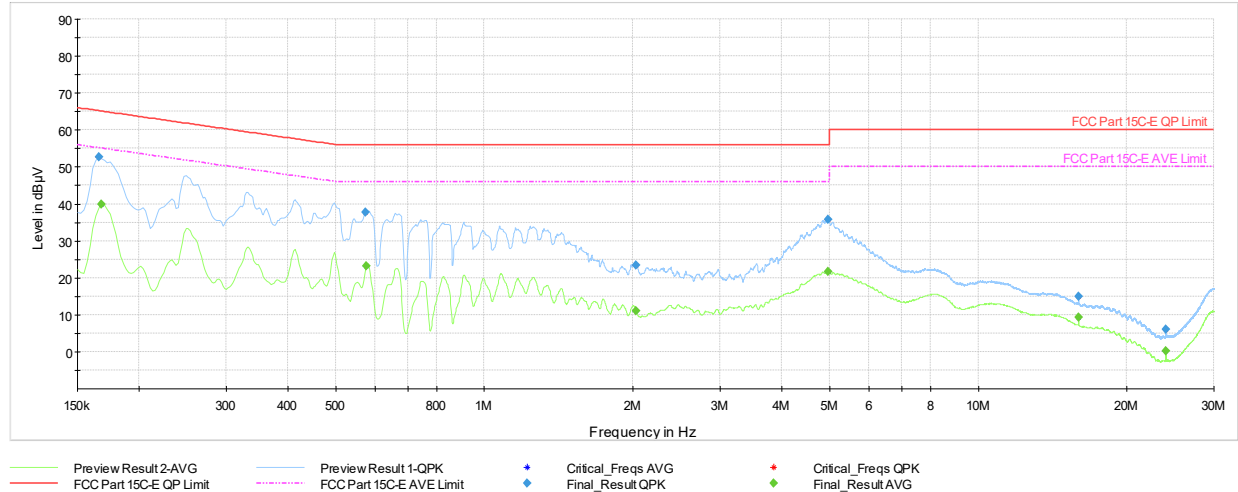

Plot 7-517. AC Line Conducted Plot with 802.11be(SU) CDD Diversity – Ch.40 (N), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	52.73	---	65.17	-12.44	N	GND
0.17	FINAL	---	39.97	55.06	-15.09	N	GND
0.58	FINAL	37.70	---	56.00	-18.30	N	GND
0.58	FINAL	---	23.19	46.00	-22.81	N	GND
2.03	FINAL	---	11.01	46.00	-34.99	N	GND
2.03	FINAL	23.50	---	56.00	-32.50	N	GND
4.97	FINAL	35.87	---	56.00	-20.13	N	GND
4.97	FINAL	---	21.64	46.00	-24.36	N	GND
15.97	FINAL	14.98	---	60.00	-45.02	N	GND
15.97	FINAL	---	9.31	50.00	-40.69	N	GND
23.95	FINAL	---	0.24	50.00	-49.76	N	GND
23.95	FINAL	6.05	---	60.00	-53.95	N	GND

Table 7-180. AC Line Conducted Data with 802.11be(SU) CDD Diversity – Ch.40 (N), with AC/DC adapter

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 254 of 255

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3361** and **IC: 579C-A3361** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-22.BCG	Test Dates: 05/12/2025 - 07/31/2025	EUT Type: Tablet Device	Page 255 of 255