

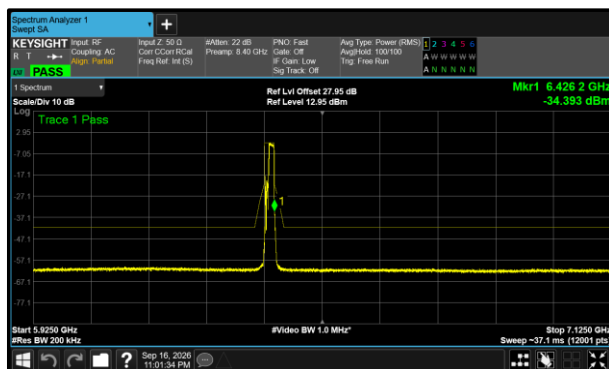


Figure 652 - B(Core 1) 802.11be EHT20 RU Size  
106 + RU Size 26 SP 6415 MHz (CH93)

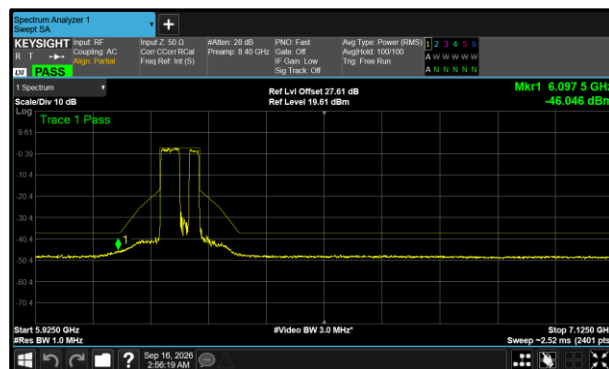


Figure 653 - B(Core 1) 802.11be EHT80 RU Size  
484 + RU Size 242 SP 6225 MHz (CH55)

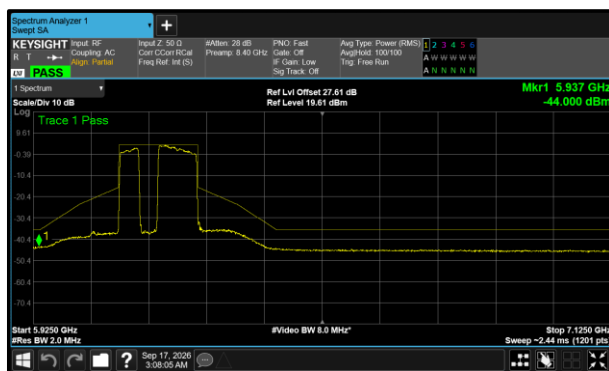


Figure 654 - B(Core 1) 802.11be EHT160 RU Size  
996 + RU Size 484 SP (Primary) 6185 MHz (CH47)

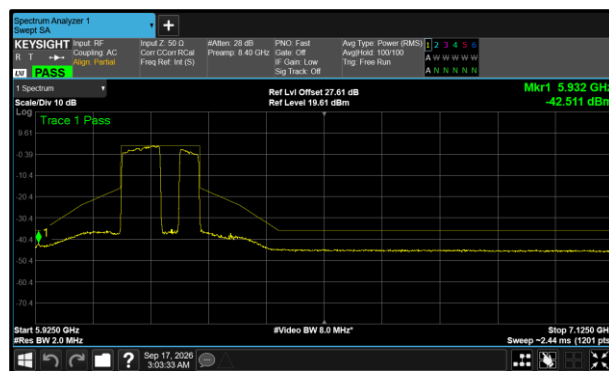


Figure 655 - B(Core 1) 802.11be EHT160 RU Size  
996 + RU Size 484 SP (Secondary) 6185 MHz  
(CH47)

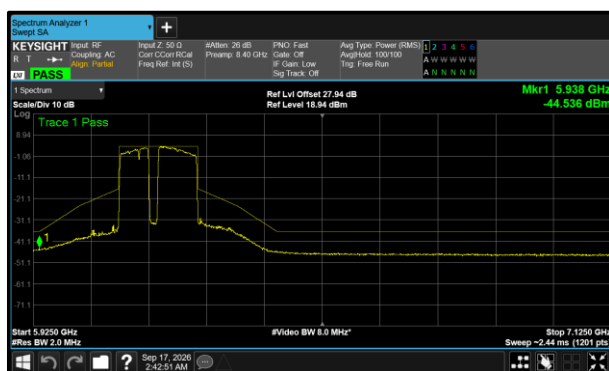


Figure 656 - A(Core 0) 802.11be EHT160 RU Size  
996 + RU Size 484 + RU Size 242 SP (Primary)  
6185 MHz (CH47)

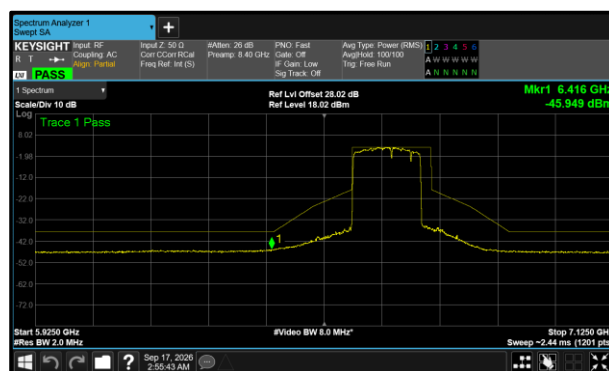


Figure 657 - B(Core 1) 802.11be EHT160 RU Size  
996 + RU Size 484 + RU Size 242 SP (Secondary)  
6665 MHz (CH143)



| Protocol                                                                | Unwanted Emissions Within the RLAN Band |                 |
|-------------------------------------------------------------------------|-----------------------------------------|-----------------|
|                                                                         | Margin (dB)                             | Frequency (MHz) |
| 802.11ax HE20 SU VLP                                                    | -15.05                                  | 6091.800        |
| 802.11ax HE40 SU VLP                                                    | -8.11                                   | 6170.153        |
| 802.11ax HE80 SU VLP                                                    | -7.27                                   | 6715.500        |
| 802.11ax HE160 SU VLP                                                   | -5.67                                   | 6177.000        |
| 802.11be EHT20 RU Size 52 + RU Size 26 VLP                              | -14.64                                  | 6984.400        |
| 802.11ax HE20 RU106 VLP                                                 | -12.22                                  | 6866.500        |
| 802.11be EHT20 RU Size 106 + RU Size 26 VLP                             | -11.18                                  | 6683.800        |
| 802.11be EHT80 RU Size 484 + RU Size 242 VLP                            | -7.50                                   | 6232.500        |
| 802.11be EHT160 RU Size 996 + RU Size 484 VLP (Secondary)               | -6.38                                   | 6549.000        |
| 802.11be EHT160 RU Size 996 + RU Size 484 VLP (Primary)                 | -6.78                                   | 6568.000        |
| 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 VLP (Primary)   | -6.42                                   | 6090.000        |
| 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 VLP (Secondary) | -6.36                                   | 6530.000        |

**Table 898 - Unwanted Emissions Within the RLAN Band Summary Results – MIMO SDM**

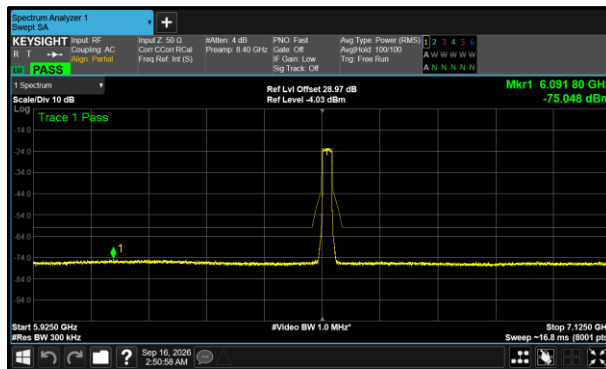


**Figure 658 - A(Core 0) 802.11ax HE20 SU VLP  
6535 MHz (CH117)**

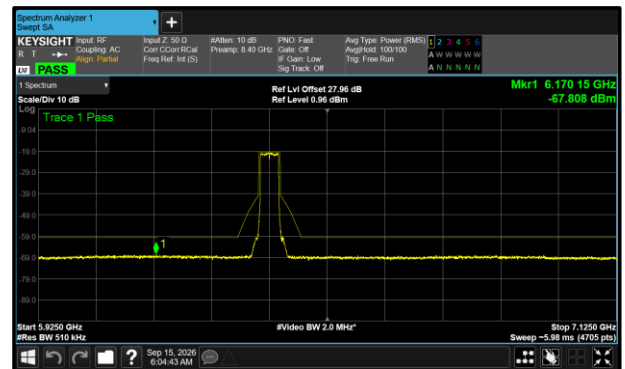


**Figure 659 - B(Core 1) 802.11ax HE40 SU VLP  
6405 MHz (CH91)**

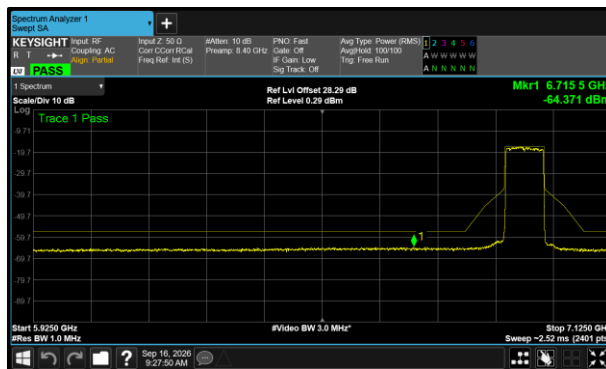


**Figure 660 - B(Core 1) 802.11ax HE80 SU VLP  
6945 MHz (CH199)**

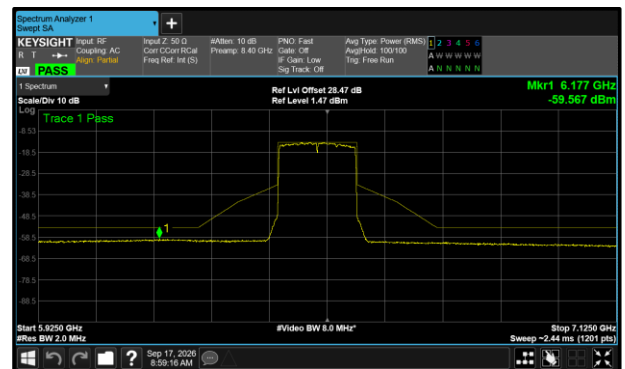


**Figure 661 - A(Core 0) 802.11ax HE160 SU VLP  
6505 MHz (CH111)**

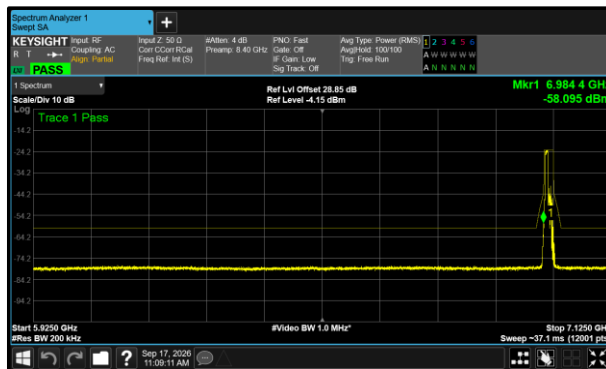


Figure 662 - A(Core 0) 802.11be EHT20 RU Size 52 + RU Size 26 VLP 6995 MHz (CH209)

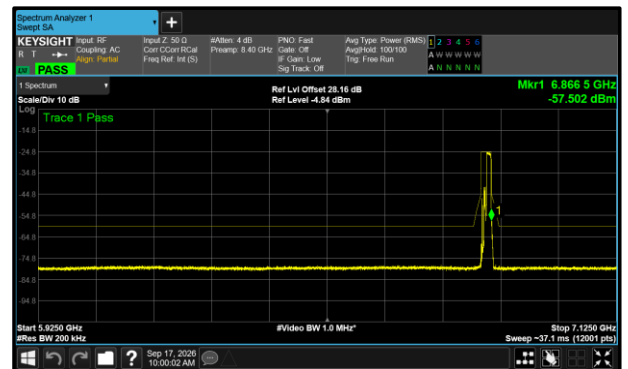


Figure 663 - B(Core 1) 802.11ax HE20 RU106 VLP 6855 MHz (CH181)

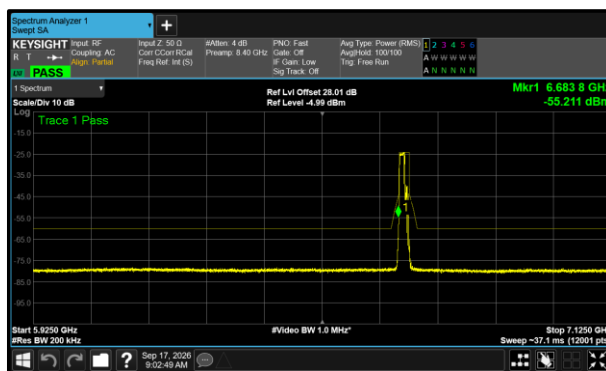


Figure 664 - B(Core 1) 802.11be EHT20 RU Size 106 + RU Size 26 VLP 6695 MHz (CH149)

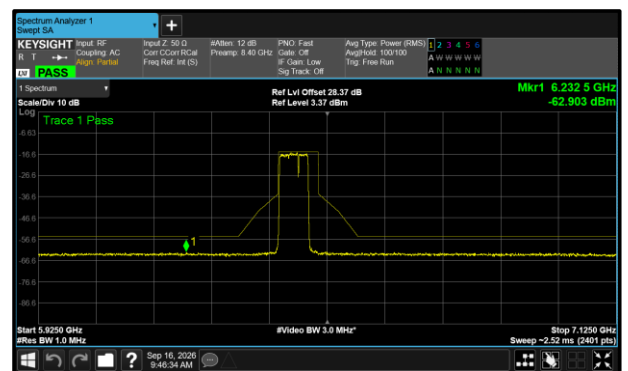


Figure 665 - A(Core 0) 802.11be EHT80 RU Size 484 + RU Size 242 VLP 6465 MHz (CH103)

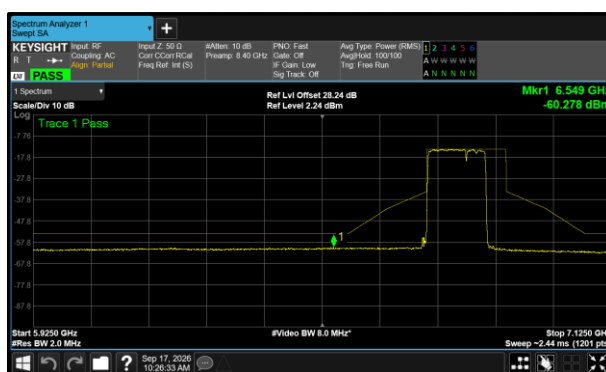


Figure 666 - B(Core 1) 802.11be EHT160 RU Size 996 + RU Size 484 VLP (Secondary) 6825 MHz (CH175)

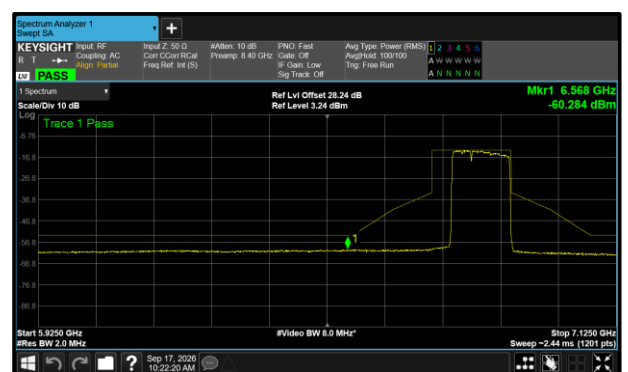


Figure 667 - B(Core 1) 802.11be EHT160 RU Size 996 + RU Size 484 VLP (Primary) 6825 MHz (CH175)

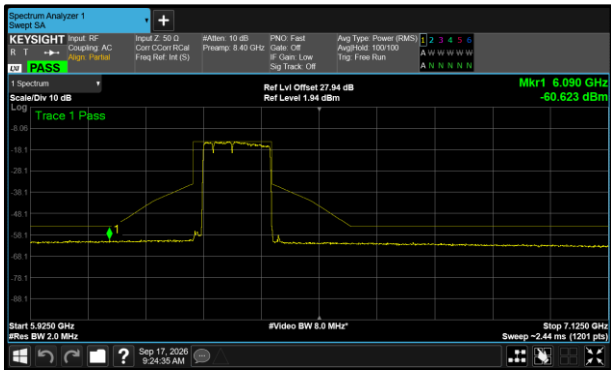


**Figure 668 - B(Core 1) 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 VLP (Primary) 6345 MHz (CH79)**

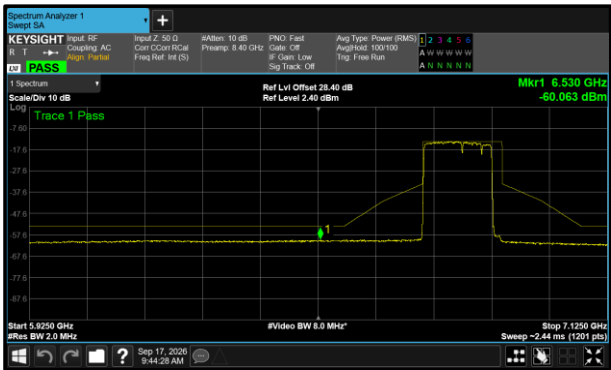


**Figure 669 - A(Core 0) 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 VLP (Secondary) 6825 MHz (CH175)**

| Protocol              | Unwanted Emissions Within the RLAN Band |                 |
|-----------------------|-----------------------------------------|-----------------|
|                       | Margin (dB)                             | Frequency (MHz) |
| 802.11ax HE20 SU LPI  | -15.00                                  | 6159.000        |
| 802.11ax HE40 SU LPI  | -7.66                                   | 6194.643        |
| 802.11ax HE80 SU LPI  | -7.06                                   | 6632.500        |
| 802.11ax HE160 SU LPI | -5.34                                   | 6221.000        |

**Table 899 - Unwanted Emissions Within the RLAN Band Summary Results - TxBF**

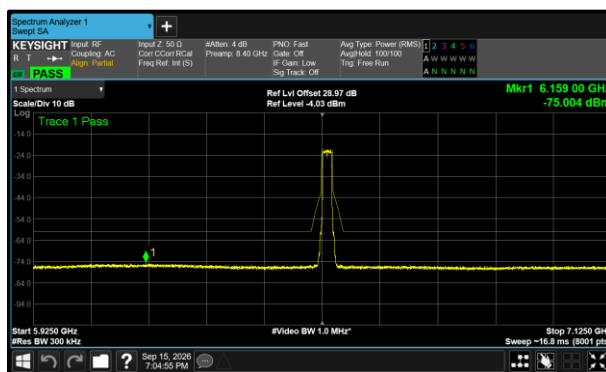


**Figure 670 - A(Core 0) 802.11ax HE20 SU LPI  
6535 MHz (CH117)**

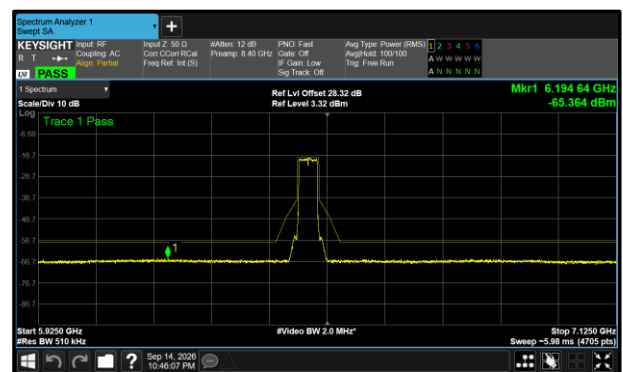


**Figure 671 - B(Core 1) 802.11ax HE40 SU LPI  
6485 MHz (CH107)**

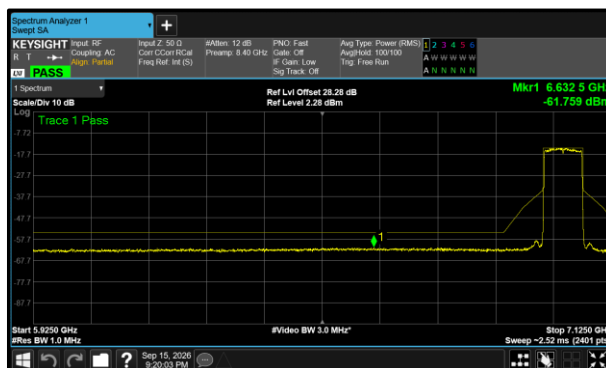


**Figure 672 - B(Core 1) 802.11ax HE80 SU LPI  
7025 MHz (CH215)**

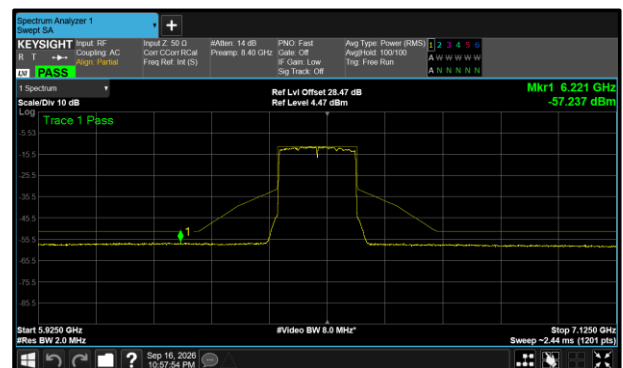


**Figure 673 - A(Core 0) 802.11ax HE160 SU LPI  
6505 MHz (CH111)**



| Protocol             | Unwanted Emissions Within the RLAN Band |                 |
|----------------------|-----------------------------------------|-----------------|
|                      | Margin (dB)                             | Frequency (MHz) |
| 802.11ax HE20 SU SP  | -16.27                                  | 6208.500        |
| 802.11ax HE40 SU SP  | -9.01                                   | 6115.561        |
| 802.11ax HE80 SU SP  | -8.99                                   | 6654.000        |
| 802.11ax HE160 SU SP | -7.45                                   | 6206.000        |

Table 900 - Unwanted Emissions Within the RLAN Band Summary Results - TxBF

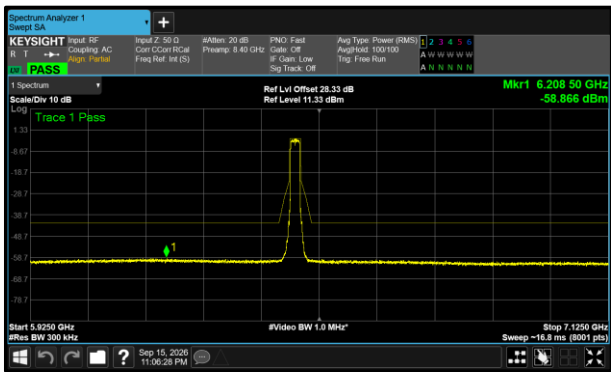


Figure 674 - B(Core 1) 802.11ax HE20 SU SP  
6475 MHz (CH105)

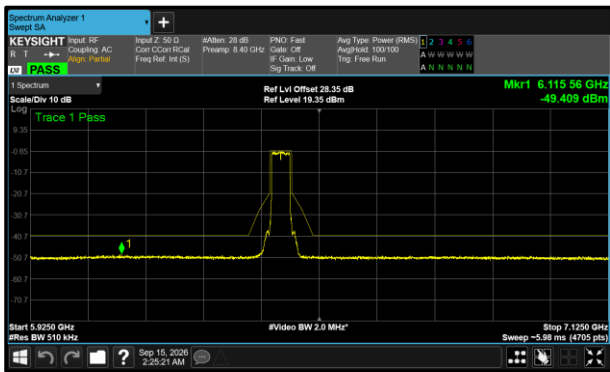


Figure 675 - A(Core 0) 802.11ax HE40 SU SP  
6445 MHz (CH99)

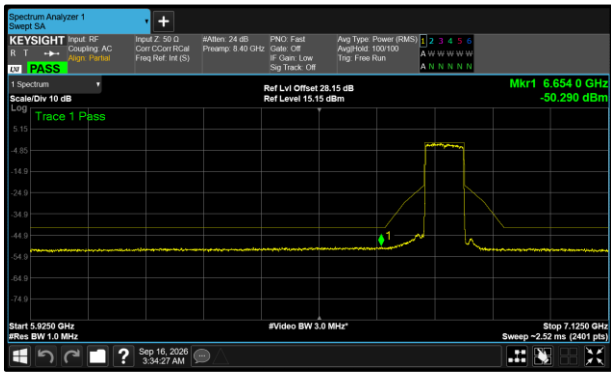


Figure 676 - B(Core 1) 802.11ax HE80 SU SP  
6785 MHz (CH167)

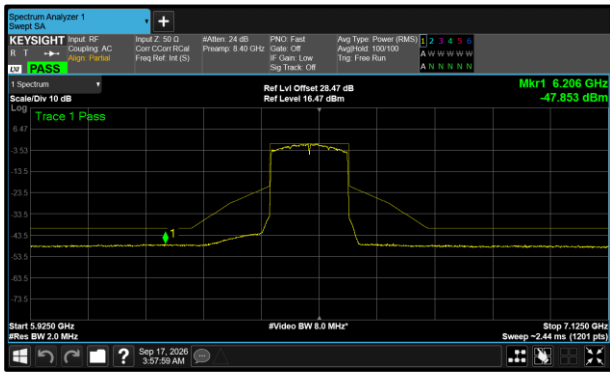


Figure 677 - A(Core 0) 802.11ax HE160 SU SP  
6505 MHz (CH111)

| Protocol              | Unwanted Emissions Within the RLAN Band |                 |
|-----------------------|-----------------------------------------|-----------------|
|                       | Margin (dB)                             | Frequency (MHz) |
| 802.11ax HE20 SU VLP  | -15.60                                  | 6082.800        |
| 802.11ax HE40 SU VLP  | -10.72                                  | 6112.245        |
| 802.11ax HE80 SU VLP  | -7.37                                   | 6554.500        |
| 802.11ax HE160 SU VLP | -6.08                                   | 6186.000        |

**Table 901 - Unwanted Emissions Within the RLAN Band Summary Results - TxBF**

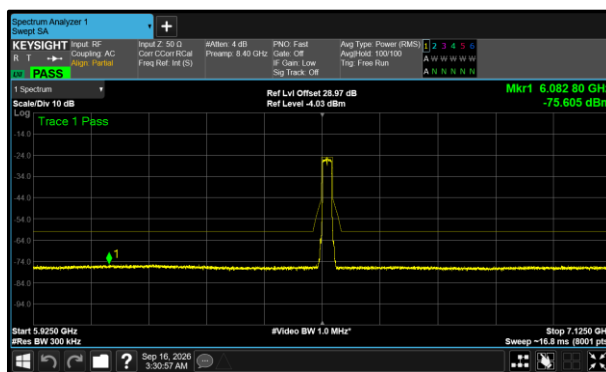


**Figure 678 - A(Core 0) 802.11ax HE20 SU VLP  
6535 MHz (CH117)**

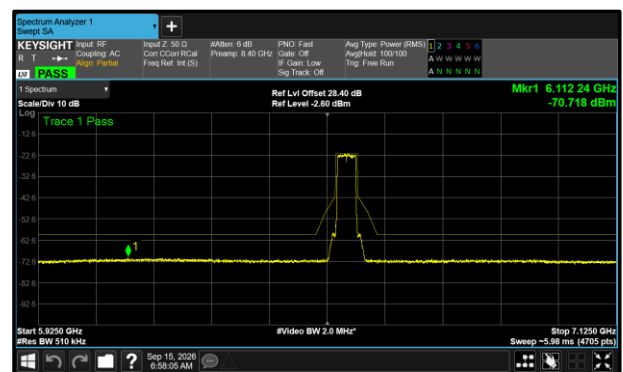


**Figure 679 - A(Core 0) 802.11ax HE40 SU VLP  
6565 MHz (CH123)**

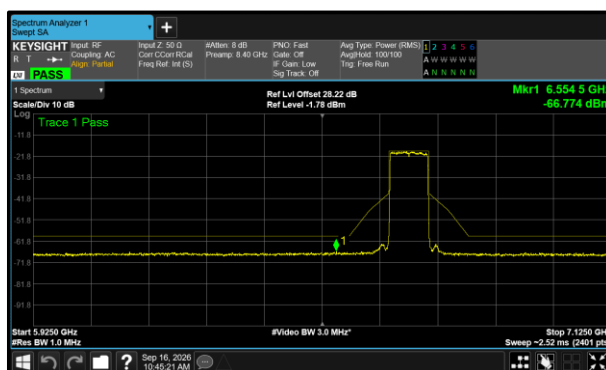


**Figure 680 - A(Core 0) 802.11ax HE80 SU VLP  
6705 MHz (CH151)**

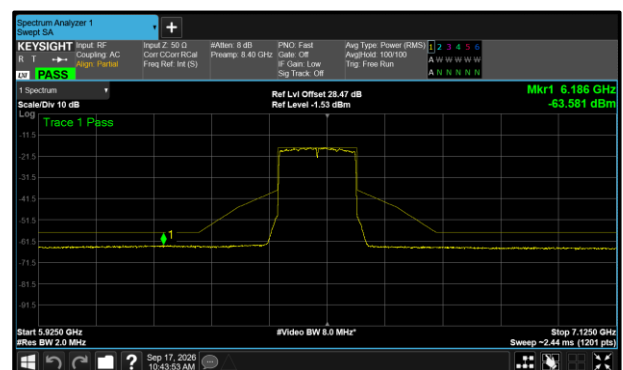


**Figure 681 - A(Core 0) 802.11ax HE160 SU VLP  
6505 MHz (CH111)**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration      |               |                          |   |
|------------------------|---------------|--------------------------|---|
| Mode:                  | 802.11a20 LPI | Duty Cycle (%):          | - |
| Data Rate:             | 12 Mbps       | DCCF (dB):               | - |
| Antenna Configuration: | SISO          | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | A (Core 0)    | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 5955                 | -14.64                                              | - | - | - |
| 6195                 | -15.82                                              | - | - | - |
| 6415                 | -14.59                                              | - | - | - |
| 6435                 | -14.63                                              | - | - | - |
| 6475                 | -14.57                                              | - | - | - |
| 6515                 | -15.01                                              | - | - | - |
| 6535                 | -14.98                                              | - | - | - |
| 6695                 | -14.45                                              | - | - | - |
| 6855                 | -15.03                                              | - | - | - |
| 6875                 | -15.56                                              | - | - | - |
| 6895                 | -15.50                                              | - | - | - |
| 7015                 | -16.37                                              | - | - | - |
| 7095                 | -14.87                                              | - | - | - |
| 7115                 | -15.15                                              | - | - | - |

**Table 902 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration      |               |                          |   |
|------------------------|---------------|--------------------------|---|
| Mode:                  | 802.11a40 LPI | Duty Cycle (%):          | - |
| Data Rate:             | 12 Mbps       | DCCF (dB):               | - |
| Antenna Configuration: | SISO          | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | A (Core 0)    | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 5965                 | -9.84                                               | - | - | - |
| 6205                 | -8.44                                               | - | - | - |
| 6365                 | -10.19                                              | - | - | - |
| 6405                 | -9.42                                               | - | - | - |
| 6445                 | -9.72                                               | - | - | - |
| 6485                 | -8.29                                               | - | - | - |
| 6525                 | -8.53                                               | - | - | - |
| 6565                 | -8.61                                               | - | - | - |
| 6725                 | -11.28                                              | - | - | - |
| 6845                 | -11.09                                              | - | - | - |
| 6885                 | -10.78                                              | - | - | - |
| 6925                 | -11.43                                              | - | - | - |
| 7005                 | -10.77                                              | - | - | - |
| 7085                 | -10.95                                              | - | - | - |

**Table 903 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration      |               |                          |   |
|------------------------|---------------|--------------------------|---|
| Mode:                  | 802.11a80 LPI | Duty Cycle (%):          | - |
| Data Rate:             | 12 Mbps       | DCCF (dB):               | - |
| Antenna Configuration: | SISO          | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | A (Core 0)    | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 5985                 | -9.53                                               | - | - | - |
| 6225                 | -10.64                                              | - | - | - |
| 6305                 | -9.81                                               | - | - | - |
| 6385                 | -9.44                                               | - | - | - |
| 6465                 | -8.05                                               | - | - | - |
| 6545                 | -9.20                                               | - | - | - |
| 6625                 | -9.22                                               | - | - | - |
| 6705                 | -10.54                                              | - | - | - |
| 6785                 | -10.32                                              | - | - | - |
| 6865                 | -10.55                                              | - | - | - |
| 6945                 | -10.97                                              | - | - | - |
| 7025                 | -10.64                                              | - | - | - |

**Table 904 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration      |                |                          |   |
|------------------------|----------------|--------------------------|---|
| Mode:                  | 802.11a160 LPI | Duty Cycle (%):          | - |
| Data Rate:             | 12 Mbps        | DCCF (dB):               | - |
| Antenna Configuration: | SISO           | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | A (Core 0)     | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 6025                 | -10.55                                              | - | - | - |
| 6185                 | -8.46                                               | - | - | - |
| 6345                 | -9.19                                               | - | - | - |
| 6505                 | -8.01                                               | - | - | - |
| 6665                 | -8.51                                               | - | - | - |
| 6825                 | -8.17                                               | - | - | - |
| 6985                 | -8.67                                               | - | - | - |

**Table 905 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                      |                          |   |
|---------------------------|----------------------|--------------------------|---|
| Mode:                     | 802.11ax HE20 SU LPI | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1               | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                 | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)           | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 5955                 | -16.82                                              | - | - | - |
| 6195                 | -16.05                                              | - | - | - |
| 6395                 | -15.77                                              | - | - | - |
| 6415                 | -15.00                                              | - | - | - |
| 6435                 | -16.22                                              | - | - | - |
| 6475                 | -16.53                                              | - | - | - |
| 6515                 | -17.89                                              | - | - | - |
| 6535                 | -15.40                                              | - | - | - |
| 6695                 | -15.97                                              | - | - | - |
| 6855                 | -16.58                                              | - | - | - |
| 6875                 | -16.22                                              | - | - | - |
| 6895                 | -16.51                                              | - | - | - |
| 6995                 | -16.68                                              | - | - | - |
| 7095                 | -17.67                                              | - | - | - |

**Table 906 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                      |                          |   |
|---------------------------|----------------------|--------------------------|---|
| Mode:                     | 802.11ax HE40 SU LPI | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1               | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                 | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)           | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 5965                 | -9.78                                               | - | - | - |
| 6205                 | -10.67                                              | - | - | - |
| 6405                 | -9.84                                               | - | - | - |
| 6445                 | -9.76                                               | - | - | - |
| 6485                 | -9.46                                               | - | - | - |
| 6525                 | -10.27                                              | - | - | - |
| 6565                 | -8.93                                               | - | - | - |
| 6725                 | -10.68                                              | - | - | - |
| 6845                 | -10.84                                              | - | - | - |
| 6885                 | -10.90                                              | - | - | - |
| 6925                 | -11.69                                              | - | - | - |
| 7005                 | -10.55                                              | - | - | - |
| 7085                 | -11.05                                              | - | - | - |

**Table 907 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                      |                          |   |
|---------------------------|----------------------|--------------------------|---|
| Mode:                     | 802.11ax HE80 SU LPI | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1               | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                 | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)           | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 5985                 | -9.62                                               | - | - | - |
| 6225                 | -10.18                                              | - | - | - |
| 6305                 | -9.32                                               | - | - | - |
| 6385                 | -9.13                                               | - | - | - |
| 6465                 | -8.24                                               | - | - | - |
| 6545                 | -8.89                                               | - | - | - |
| 6625                 | -7.52                                               | - | - | - |
| 6705                 | -8.72                                               | - | - | - |
| 6785                 | -10.14                                              | - | - | - |
| 6865                 | -9.10                                               | - | - | - |
| 6945                 | -9.34                                               | - | - | - |
| 7025                 | -8.58                                               | - | - | - |

**Table 908 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                       |                          |   |
|---------------------------|-----------------------|--------------------------|---|
| Mode:                     | 802.11ax HE160 SU LPI | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                  | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)            | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 6025                 | -8.25                                               | - | - | - |
| 6185                 | -8.22                                               | - | - | - |
| 6345                 | -7.90                                               | - | - | - |
| 6505                 | -8.21                                               | - | - | - |
| 6665                 | -7.99                                               | - | - | - |
| 6825                 | -6.95                                               | - | - | - |
| 6985                 | -7.97                                               | - | - | - |

**Table 909 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                        |                          |   |
|---------------------------|------------------------|--------------------------|---|
| Mode:                     | 802.11ax HE20 RU26 LPI | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                 | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                   | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)             | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 5955 (RU26.0)        | -14.86                                              | - | - | - |
| 6195 (RU26.0)        | -14.58                                              | - | - | - |
| 6415 (RU26.8)        | -12.76                                              | - | - | - |
| 6435 (RU26.0)        | -12.73                                              | - | - | - |
| 6475 (RU26.0)        | -12.61                                              | - | - | - |
| 6515 (RU26.8)        | -13.40                                              | - | - | - |
| 6535 (RU26.0)        | -12.54                                              | - | - | - |
| 6695 (RU26.0)        | -12.68                                              | - | - | - |
| 6855 (RU26.8)        | -13.78                                              | - | - | - |
| 6875 (RU26.3)        | -19.07                                              | - | - | - |
| 6875 (RU26.5)        | -19.38                                              | - | - | - |
| 6895 (RU26.0)        | -12.77                                              | - | - | - |
| 6995 (RU26.0)        | -13.46                                              | - | - | - |
| 7095 (RU26.8)        | -13.99                                              | - | - | - |

**Table 910 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                        |                          |   |
|---------------------------|------------------------|--------------------------|---|
| Mode:                     | 802.11ax HE20 RU52 LPI | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                 | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                   | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)             | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 5955 (RU52.37)       | -12.88                                              | - | - | - |
| 6195 (RU52.37)       | -12.46                                              | - | - | - |
| 6415 (RU52.40)       | -14.04                                              | - | - | - |
| 6435 (RU52.37)       | -13.21                                              | - | - | - |
| 6475 (RU52.37)       | -13.07                                              | - | - | - |
| 6515 (RU52.40)       | -13.66                                              | - | - | - |
| 6535 (RU52.37)       | -12.53                                              | - | - | - |
| 6695 (RU52.37)       | -12.43                                              | - | - | - |
| 6855 (RU52.40)       | -14.00                                              | - | - | - |
| 6875 (RU52.38)       | -19.64                                              | - | - | - |
| 6875 (RU52.39)       | -19.53                                              | - | - | - |
| 6895 (RU52.37)       | -12.36                                              | - | - | - |
| 6995 (RU52.37)       | -12.78                                              | - | - | - |
| 7095 (RU52.40)       | -12.70                                              | - | - | - |

**Table 911 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                         |                          |   |
|---------------------------|-------------------------|--------------------------|---|
| Mode:                     | 802.11ax HE20 RU106 LPI | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                  | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                    | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)              | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 5955 (RU106.53)      | -13.66                                              | - | - | - |
| 6195 (RU106.53)      | -14.73                                              | - | - | - |
| 6395 (RU106.53)      | -14.44                                              | - | - | - |
| 6415 (RU106.54)      | -13.35                                              | - | - | - |
| 6435 (RU106.53)      | -14.64                                              | - | - | - |
| 6475 (RU106.53)      | -14.32                                              | - | - | - |
| 6515 (RU106.54)      | -14.96                                              | - | - | - |
| 6535 (RU106.53)      | -13.70                                              | - | - | - |
| 6695 (RU106.53)      | -15.72                                              | - | - | - |
| 6855 (RU106.54)      | -14.26                                              | - | - | - |
| 6875 (RU106.53)      | -14.81                                              | - | - | - |
| 6875 (RU106.54)      | -13.00                                              | - | - | - |
| 6895 (RU106.53)      | -13.20                                              | - | - | - |
| 6995 (RU106.53)      | -13.86                                              | - | - | - |
| 7095 (RU106.54)      | -13.86                                              | - | - | - |

**Table 912 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                            |                          |   |
|---------------------------|--------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT20 RU Size 52 + RU Size 26 LPI | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                     | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                       | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)                                 | Active Chain Id(s):      | 0 |

| Test Frequency (MHz)              | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|-----------------------------------|-----------------------------------------------------|---|---|---|
|                                   | A                                                   | B | C | D |
| 5955 (RU Size 52 + RU Size 26.70) | -17.02                                              | - | - | - |
| 6195 (RU Size 52 + RU Size 26.70) | -16.22                                              | - | - | - |
| 6395 (RU Size 52 + RU Size 26.70) | -17.28                                              | - | - | - |
| 6415 (RU Size 52 + RU Size 26.72) | -15.83                                              | - | - | - |
| 6435 (RU Size 52 + RU Size 26.70) | -17.75                                              | - | - | - |
| 6475 (RU Size 52 + RU Size 26.70) | -16.21                                              | - | - | - |
| 6515 (RU Size 52 + RU Size 26.72) | -16.28                                              | - | - | - |
| 6535 (RU Size 52 + RU Size 26.70) | -16.93                                              | - | - | - |
| 6695 (RU Size 52 + RU Size 26.70) | -16.02                                              | - | - | - |
| 6855 (RU Size 52 + RU Size 26.72) | -15.49                                              | - | - | - |
| 6875 (RU Size 52 + RU Size 26.70) | -17.22                                              | - | - | - |
| 6875 (RU Size 52 + RU Size 26.72) | -14.87                                              | - | - | - |
| 6895 (RU Size 52 + RU Size 26.70) | -18.11                                              | - | - | - |
| 6995 (RU Size 52 + RU Size 26.70) | -15.42                                              | - | - | - |
| 7095 (RU Size 52 + RU Size 26.72) | -16.69                                              | - | - | - |

**Table 913 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                             |                          |   |
|---------------------------|---------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT20 RU Size 106 + RU Size 26 LPI | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                      | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                        | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)                                  | Active Chain Id(s):      | 0 |

| Test Frequency (MHz)               | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|------------------------------------|-----------------------------------------------------|---|---|---|
|                                    | A                                                   | B | C | D |
| 5955 (RU Size 106 + RU Size 26.82) | -15.37                                              | - | - | - |
| 6195 (RU Size 106 + RU Size 26.82) | -14.36                                              | - | - | - |
| 6415 (RU Size 106 + RU Size 26.83) | -12.86                                              | - | - | - |
| 6435 (RU Size 106 + RU Size 26.82) | -14.27                                              | - | - | - |
| 6475 (RU Size 106 + RU Size 26.82) | -15.13                                              | - | - | - |
| 6515 (RU Size 106 + RU Size 26.83) | -12.71                                              | - | - | - |
| 6535 (RU Size 106 + RU Size 26.82) | -15.03                                              | - | - | - |
| 6695 (RU Size 106 + RU Size 26.82) | -15.55                                              | - | - | - |
| 6855 (RU Size 106 + RU Size 26.83) | -13.06                                              | - | - | - |
| 6875 (RU Size 106 + RU Size 26.82) | -13.37                                              | - | - | - |
| 6875 (RU Size 106 + RU Size 26.83) | -13.73                                              | - | - | - |
| 6895 (RU Size 106 + RU Size 26.82) | -16.26                                              | - | - | - |
| 6995 (RU Size 106 + RU Size 26.82) | -16.26                                              | - | - | - |
| 7095 (RU Size 106 + RU Size 26.83) | -13.22                                              | - | - | - |

**Table 914 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                              |                          |   |
|---------------------------|----------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT80 RU Size 484 + RU Size 242 LPI | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                       | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                         | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)                                   | Active Chain Id(s):      | 0 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|-------------------------------------|-----------------------------------------------------|---|---|---|
|                                     | A                                                   | B | C | D |
| 5985 (RU Size 484 + RU Size 242.93) | -9.64                                               | - | - | - |
| 6225 (RU Size 484 + RU Size 242.92) | -10.39                                              | - | - | - |
| 6385 (RU Size 484 + RU Size 242.90) | -9.85                                               | - | - | - |
| 6465 (RU Size 484 + RU Size 242.93) | -7.88                                               | - | - | - |
| 6545 (RU Size 484 + RU Size 242.90) | -9.02                                               | - | - | - |
| 6545 (RU Size 484 + RU Size 242.93) | -9.16                                               | - | - | - |
| 6625 (RU Size 484 + RU Size 242.93) | -7.27                                               | - | - | - |
| 6705 (RU Size 484 + RU Size 242.91) | -9.33                                               | - | - | - |
| 6785 (RU Size 484 + RU Size 242.90) | -9.29                                               | - | - | - |
| 6865 (RU Size 484 + RU Size 242.90) | -10.53                                              | - | - | - |
| 6865 (RU Size 484 + RU Size 242.93) | -10.49                                              | - | - | - |
| 6945 (RU Size 484 + RU Size 242.93) | -9.41                                               | - | - | - |
| 7025 (RU Size 484 + RU Size 242.90) | -9.14                                               | - | - | - |

**Table 915 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                                         |                          |   |
|---------------------------|---------------------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 LPI (Primary) | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                                  | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                                    | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)                                              | Active Chain Id(s):      | 0 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|-------------------------------------|-----------------------------------------------------|---|---|---|
|                                     | A                                                   | B | C | D |
| 6185 (RU Size 996 + RU Size 484.95) | -8.35                                               | - | - | - |
| 6345 (RU Size 996 + RU Size 484.94) | -8.32                                               | - | - | - |
| 6505 (RU Size 996 + RU Size 484.94) | -6.95                                               | - | - | - |
| 6665 (RU Size 996 + RU Size 484.94) | -8.58                                               | - | - | - |
| 6825 (RU Size 996 + RU Size 484.94) | -8.07                                               | - | - | - |
| 6985 (RU Size 996 + RU Size 484.94) | -7.67                                               | - | - | - |

**Table 916 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                                           |                          |   |
|---------------------------|-----------------------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 LPI (Secondary) | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                                    | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                                      | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)                                                | Active Chain Id(s):      | 0 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|-------------------------------------|-----------------------------------------------------|---|---|---|
|                                     | A                                                   | B | C | D |
| 6025 (RU Size 996 + RU Size 484.95) | -8.53                                               | - | - | - |
| 6185 (RU Size 996 + RU Size 484.94) | -8.10                                               | - | - | - |
| 6505 (RU Size 996 + RU Size 484.95) | -8.53                                               | - | - | - |
| 6665 (RU Size 996 + RU Size 484.95) | -8.13                                               | - | - | - |
| 6825 (RU Size 996 + RU Size 484.95) | -7.64                                               | - | - | - |
| 6985 (RU Size 996 + RU Size 484.95) | -7.62                                               | - | - | - |

**Table 917 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                                                       |                          |   |
|---------------------------|-----------------------------------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 LPI (Primary) | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                                                | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                                                  | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)                                                            | Active Chain Id(s):      | 0 |

| Test Frequency (MHz)                              | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|---------------------------------------------------|-----------------------------------------------------|---|---|---|
|                                                   | A                                                   | B | C | D |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.97) | -8.36                                               | - | - | - |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.98) | -8.36                                               | - | - | - |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.99) | -8.13                                               | - | - | - |
| 6345 (RU Size 996 + RU Size 484 + RU Size 242.96) | -8.08                                               | - | - | - |
| 6505 (RU Size 996 + RU Size 484 + RU Size 242.96) | -7.17                                               | - | - | - |
| 6665 (RU Size 996 + RU Size 484 + RU Size 242.96) | -8.33                                               | - | - | - |
| 6825 (RU Size 996 + RU Size 484 + RU Size 242.96) | -7.19                                               | - | - | - |
| 6985 (RU Size 996 + RU Size 484 + RU Size 242.96) | -8.55                                               | - | - | - |

**Table 918 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                                                         |                          |   |
|---------------------------|-------------------------------------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 LPI (Secondary) | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                                                  | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                                                    | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)                                                              | Active Chain Id(s):      | 0 |

| Test Frequency (MHz)                              | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|---------------------------------------------------|-----------------------------------------------------|---|---|---|
|                                                   | A                                                   | B | C | D |
| 6025 (RU Size 996 + RU Size 484 + RU Size 242.99) | -8.13                                               | - | - | - |
| 6505 (RU Size 996 + RU Size 484 + RU Size 242.99) | -8.29                                               | - | - | - |
| 6665 (RU Size 996 + RU Size 484 + RU Size 242.99) | -8.11                                               | - | - | - |
| 6825 (RU Size 996 + RU Size 484 + RU Size 242.99) | -8.08                                               | - | - | - |
| 6985 (RU Size 996 + RU Size 484 + RU Size 242.99) | -7.85                                               | - | - | - |

**Table 919 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration      |              |                          |   |
|------------------------|--------------|--------------------------|---|
| Mode:                  | 802.11a20 SP | Duty Cycle (%):          | - |
| Data Rate:             | 12 Mbps      | DCCF (dB):               | - |
| Antenna Configuration: | SISO         | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | A (Core 0)   | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 5955                 | -15.27                                              | - | - | - |
| 6195                 | -15.55                                              | - | - | - |
| 6415                 | -15.77                                              | - | - | - |
| 6435                 | -13.64                                              | - | - | - |
| 6475                 | -14.39                                              | - | - | - |
| 6515                 | -14.16                                              | - | - | - |
| 6535                 | -14.02                                              | - | - | - |
| 6695                 | -14.24                                              | - | - | - |
| 6855                 | -13.67                                              | - | - | - |

**Table 920 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration      |              |                          |   |
|------------------------|--------------|--------------------------|---|
| Mode:                  | 802.11a40 SP | Duty Cycle (%):          | - |
| Data Rate:             | 12 Mbps      | DCCF (dB):               | - |
| Antenna Configuration: | SISO         | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | A (Core 0)   | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 5965                 | -10.85                                              | - | - | - |
| 6205                 | -10.46                                              | - | - | - |
| 6405                 | -11.44                                              | - | - | - |
| 6445                 | -11.18                                              | - | - | - |
| 6485                 | -11.69                                              | - | - | - |
| 6525                 | -11.88                                              | - | - | - |
| 6565                 | -9.88                                               | - | - | - |
| 6725                 | -9.91                                               | - | - | - |
| 6845                 | -11.94                                              | - | - | - |

**Table 921 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration      |              |                          |   |
|------------------------|--------------|--------------------------|---|
| Mode:                  | 802.11a80 SP | Duty Cycle (%):          | - |
| Data Rate:             | 12 Mbps      | DCCF (dB):               | - |
| Antenna Configuration: | SISO         | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | A (Core 0)   | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 5985                 | -12.47                                              | - | - | - |
| 6225                 | -10.20                                              | - | - | - |
| 6385                 | -9.81                                               | - | - | - |
| 6465                 | -10.14                                              | - | - | - |
| 6545                 | -9.66                                               | - | - | - |
| 6625                 | -9.84                                               | - | - | - |
| 6705                 | -9.60                                               | - | - | - |
| 6785                 | -10.59                                              | - | - | - |

**Table 922 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration      |               |                          |   |
|------------------------|---------------|--------------------------|---|
| Mode:                  | 802.11a160 SP | Duty Cycle (%):          | - |
| Data Rate:             | 12 Mbps       | DCCF (dB):               | - |
| Antenna Configuration: | SISO          | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | A (Core 0)    | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 6025                 | -10.36                                              | - | - | - |
| 6185                 | -6.53                                               | - | - | - |
| 6345                 | -4.40                                               | - | - | - |
| 6505                 | -5.73                                               | - | - | - |
| 6665                 | -6.23                                               | - | - | - |

**Table 923 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                     |                          |   |
|---------------------------|---------------------|--------------------------|---|
| Mode:                     | 802.11ax HE20 SU SP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1              | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)          | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 5955                 | -17.79                                              | - | - | - |
| 6195                 | -17.77                                              | - | - | - |
| 6415                 | -16.28                                              | - | - | - |
| 6435                 | -17.60                                              | - | - | - |
| 6475                 | -16.61                                              | - | - | - |
| 6515                 | -17.42                                              | - | - | - |
| 6535                 | -17.38                                              | - | - | - |
| 6695                 | -15.63                                              | - | - | - |
| 6855                 | -17.12                                              | - | - | - |

**Table 924 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                     |                          |   |
|---------------------------|---------------------|--------------------------|---|
| Mode:                     | 802.11ax HE40 SU SP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1              | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)          | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 5965                 | -10.47                                              | - | - | - |
| 6205                 | -10.72                                              | - | - | - |
| 6405                 | -11.42                                              | - | - | - |
| 6445                 | -11.10                                              | - | - | - |
| 6485                 | -11.23                                              | - | - | - |
| 6525                 | -9.39                                               | - | - | - |
| 6565                 | -9.48                                               | - | - | - |
| 6725                 | -11.76                                              | - | - | - |
| 6845                 | -11.74                                              | - | - | - |

**Table 925 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                     |                          |   |
|---------------------------|---------------------|--------------------------|---|
| Mode:                     | 802.11ax HE80 SU SP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1              | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)          | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 5985                 | -10.27                                              | - | - | - |
| 6225                 | -11.13                                              | - | - | - |
| 6385                 | -6.36                                               | - | - | - |
| 6465                 | -9.49                                               | - | - | - |
| 6545                 | -9.37                                               | - | - | - |
| 6625                 | -10.47                                              | - | - | - |
| 6705                 | -8.61                                               | - | - | - |
| 6785                 | -9.88                                               | - | - | - |

**Table 926 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                      |                          |   |
|---------------------------|----------------------|--------------------------|---|
| Mode:                     | 802.11ax HE160 SU SP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1               | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                 | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)           | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 6025                 | -9.33                                               | - | - | - |
| 6185                 | -8.86                                               | - | - | - |
| 6345                 | -8.07                                               | - | - | - |
| 6505                 | -8.59                                               | - | - | - |
| 6665                 | -8.37                                               | - | - | - |

**Table 927 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                       |                          |   |
|---------------------------|-----------------------|--------------------------|---|
| Mode:                     | 802.11ax HE20 RU26 SP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                  | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)            | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 5955 (RU26.0)        | -13.27                                              | - | - | - |
| 6195 (RU26.0)        | -13.09                                              | - | - | - |
| 6415 (RU26.8)        | -12.73                                              | - | - | - |
| 6435 (RU26.0)        | -12.21                                              | - | - | - |
| 6475 (RU26.0)        | -13.12                                              | - | - | - |
| 6515 (RU26.8)        | -14.18                                              | - | - | - |
| 6535 (RU26.0)        | -13.79                                              | - | - | - |
| 6695 (RU26.0)        | -13.58                                              | - | - | - |
| 6855 (RU26.8)        | -12.29                                              | - | - | - |

**Table 928 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                       |                          |   |
|---------------------------|-----------------------|--------------------------|---|
| Mode:                     | 802.11ax HE20 RU52 SP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                  | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)            | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 5955 (RU52.37)       | -13.37                                              | - | - | - |
| 6195 (RU52.37)       | -11.58                                              | - | - | - |
| 6275 (RU52.37)       | -13.19                                              | - | - | - |
| 6415 (RU52.40)       | -13.14                                              | - | - | - |
| 6435 (RU52.37)       | -13.31                                              | - | - | - |
| 6475 (RU52.37)       | -13.10                                              | - | - | - |
| 6515 (RU52.40)       | -14.35                                              | - | - | - |
| 6535 (RU52.37)       | -13.11                                              | - | - | - |
| 6695 (RU52.37)       | -14.12                                              | - | - | - |
| 6855 (RU52.40)       | -13.14                                              | - | - | - |

**Table 929 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                        |                          |   |
|---------------------------|------------------------|--------------------------|---|
| Mode:                     | 802.11ax HE20 RU106 SP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                 | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                   | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)             | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 5955 (RU106.53)      | -15.43                                              | - | - | - |
| 6195 (RU106.53)      | -14.56                                              | - | - | - |
| 6415 (RU106.54)      | -13.50                                              | - | - | - |
| 6435 (RU106.53)      | -12.94                                              | - | - | - |
| 6475 (RU106.53)      | -13.92                                              | - | - | - |
| 6515 (RU106.54)      | -13.36                                              | - | - | - |
| 6535 (RU106.53)      | -14.17                                              | - | - | - |
| 6695 (RU106.53)      | -13.66                                              | - | - | - |
| 6855 (RU106.54)      | -14.39                                              | - | - | - |

**Table 930 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                                           |                          |   |
|---------------------------|-------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT20 RU Size 52 + RU Size 26 SP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                    | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                      | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)                                | Active Chain Id(s):      | 0 |

| Test Frequency (MHz)              | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|-----------------------------------|-----------------------------------------------------|---|---|---|
|                                   | A                                                   | B | C | D |
| 5955 (RU Size 52 + RU Size 26.70) | -18.42                                              | - | - | - |
| 6195 (RU Size 52 + RU Size 26.70) | -15.85                                              | - | - | - |
| 6415 (RU Size 52 + RU Size 26.72) | -17.20                                              | - | - | - |
| 6435 (RU Size 52 + RU Size 26.70) | -16.35                                              | - | - | - |
| 6475 (RU Size 52 + RU Size 26.70) | -17.37                                              | - | - | - |
| 6515 (RU Size 52 + RU Size 26.72) | -15.93                                              | - | - | - |
| 6535 (RU Size 52 + RU Size 26.70) | -16.50                                              | - | - | - |
| 6695 (RU Size 52 + RU Size 26.70) | -16.21                                              | - | - | - |
| 6855 (RU Size 52 + RU Size 26.72) | -16.51                                              | - | - | - |

**Table 931 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                                            |                          |   |
|---------------------------|--------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT20 RU Size 106 + RU Size 26 SP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                     | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                       | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)                                 | Active Chain Id(s):      | 0 |

| Test Frequency<br>(MHz)            | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|------------------------------------|-----------------------------------------------------|---|---|---|
|                                    | A                                                   | B | C | D |
| 5955 (RU Size 106 + RU Size 26.82) | -14.82                                              | - | - | - |
| 6195 (RU Size 106 + RU Size 26.82) | -15.60                                              | - | - | - |
| 6415 (RU Size 106 + RU Size 26.83) | -13.95                                              | - | - | - |
| 6435 (RU Size 106 + RU Size 26.82) | -15.71                                              | - | - | - |
| 6475 (RU Size 106 + RU Size 26.82) | -15.64                                              | - | - | - |
| 6515 (RU Size 106 + RU Size 26.83) | -13.92                                              | - | - | - |
| 6535 (RU Size 106 + RU Size 26.82) | -15.14                                              | - | - | - |
| 6695 (RU Size 106 + RU Size 26.82) | -13.74                                              | - | - | - |
| 6855 (RU Size 106 + RU Size 26.83) | -12.91                                              | - | - | - |

**Table 932 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                                             |                          |   |
|---------------------------|---------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT80 RU Size 484 + RU Size 242 SP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                      | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                        | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)                                  | Active Chain Id(s):      | 0 |

| Test Frequency<br>(MHz)             | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|-------------------------------------|-----------------------------------------------------|---|---|---|
|                                     | A                                                   | B | C | D |
| 5985 (RU Size 484 + RU Size 242.93) | -9.80                                               | - | - | - |
| 6225 (RU Size 484 + RU Size 242.92) | -7.54                                               | - | - | - |
| 6385 (RU Size 484 + RU Size 242.90) | -9.84                                               | - | - | - |
| 6465 (RU Size 484 + RU Size 242.93) | -9.27                                               | - | - | - |
| 6545 (RU Size 484 + RU Size 242.90) | -10.52                                              | - | - | - |
| 6545 (RU Size 484 + RU Size 242.93) | -10.25                                              | - | - | - |
| 6625 (RU Size 484 + RU Size 242.93) | -8.31                                               | - | - | - |
| 6705 (RU Size 484 + RU Size 242.91) | -9.27                                               | - | - | - |
| 6785 (RU Size 484 + RU Size 242.90) | -10.03                                              | - | - | - |

**Table 933 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                                                        |                          |   |
|---------------------------|--------------------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 SP (Primary) | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                                 | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                                   | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)                                             | Active Chain Id(s):      | 0 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|-------------------------------------|-----------------------------------------------------|---|---|---|
|                                     | A                                                   | B | C | D |
| 6185 (RU Size 996 + RU Size 484.95) | -8.10                                               | - | - | - |
| 6345 (RU Size 996 + RU Size 484.94) | -9.42                                               | - | - | - |
| 6505 (RU Size 996 + RU Size 484.94) | -8.52                                               | - | - | - |
| 6665 (RU Size 996 + RU Size 484.94) | -9.56                                               | - | - | - |

**Table 934 - Unwanted Emissions Within the Band Results**

| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                                                          |                          |   |
|---------------------------|----------------------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 SP (Secondary) | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                                   | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                                     | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)                                               | Active Chain Id(s):      | 0 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|-------------------------------------|-----------------------------------------------------|---|---|---|
|                                     | A                                                   | B | C | D |
| 6025 (RU Size 996 + RU Size 484.95) | -9.67                                               | - | - | - |
| 6185 (RU Size 996 + RU Size 484.94) | -7.33                                               | - | - | - |
| 6505 (RU Size 996 + RU Size 484.95) | -8.46                                               | - | - | - |
| 6665 (RU Size 996 + RU Size 484.95) | -9.31                                               | - | - | - |

**Table 935 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                                                                         |                          |   |
|---------------------------|-------------------------------------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242<br>SP (Primary) | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                                                  | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                                                    | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)                                                              | Active Chain Id(s):      | 0 |

| Test Frequency (MHz)                              | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|---------------------------------------------------|-----------------------------------------------------|---|---|---|
|                                                   | A                                                   | B | C | D |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.97) | -7.41                                               | - | - | - |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.98) | -8.46                                               | - | - | - |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.99) | -8.11                                               | - | - | - |
| 6345 (RU Size 996 + RU Size 484 + RU Size 242.96) | -8.91                                               | - | - | - |
| 6505 (RU Size 996 + RU Size 484 + RU Size 242.96) | -7.83                                               | - | - | - |
| 6665 (RU Size 996 + RU Size 484 + RU Size 242.96) | -8.74                                               | - | - | - |

**Table 936 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                                                                        |                          |   |
|---------------------------|------------------------------------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Secondary) | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                                                 | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                                                   | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)                                                             | Active Chain Id(s):      | 0 |

| Test Frequency (MHz)                              | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|---------------------------------------------------|-----------------------------------------------------|---|---|---|
|                                                   | A                                                   | B | C | D |
| 6025 (RU Size 996 + RU Size 484 + RU Size 242.99) | -9.55                                               | - | - | - |
| 6505 (RU Size 996 + RU Size 484 + RU Size 242.99) | -7.39                                               | - | - | - |
| 6665 (RU Size 996 + RU Size 484 + RU Size 242.99) | -8.73                                               | - | - | - |

**Table 937 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration      |               |                          |   |
|------------------------|---------------|--------------------------|---|
| Mode:                  | 802.11a20 VLP | Duty Cycle (%):          | - |
| Data Rate:             | 12 Mbps       | DCCF (dB):               | - |
| Antenna Configuration: | SISO          | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | A (Core 0)    | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 6115                 | -14.64                                              | - | - | - |
| 6275                 | -15.77                                              | - | - | - |
| 6415                 | -15.13                                              | - | - | - |
| 6435                 | -14.70                                              | - | - | - |
| 6475                 | -14.91                                              | - | - | - |
| 6515                 | -14.83                                              | - | - | - |
| 6535                 | -13.80                                              | - | - | - |
| 6695                 | -14.76                                              | - | - | - |
| 6855                 | -14.38                                              | - | - | - |
| 6875                 | -15.36                                              | - | - | - |
| 6895                 | -14.01                                              | - | - | - |
| 7015                 | -14.54                                              | - | - | - |
| 7095                 | -14.00                                              | - | - | - |
| 7115                 | -14.65                                              | - | - | - |

**Table 938 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration      |               |                          |   |
|------------------------|---------------|--------------------------|---|
| Mode:                  | 802.11a40 VLP | Duty Cycle (%):          | - |
| Data Rate:             | 12 Mbps       | DCCF (dB):               | - |
| Antenna Configuration: | SISO          | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | A (Core 0)    | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 6125                 | -10.32                                              | - | - | - |
| 6285                 | -9.98                                               | - | - | - |
| 6365                 | -10.30                                              | - | - | - |
| 6405                 | -9.43                                               | - | - | - |
| 6445                 | -10.22                                              | - | - | - |
| 6485                 | -8.34                                               | - | - | - |
| 6525                 | -10.50                                              | - | - | - |
| 6565                 | -9.47                                               | - | - | - |
| 6725                 | -9.34                                               | - | - | - |
| 6845                 | -11.16                                              | - | - | - |
| 6885                 | -11.27                                              | - | - | - |
| 6925                 | -9.88                                               | - | - | - |
| 7005                 | -11.63                                              | - | - | - |
| 7085                 | -11.17                                              | - | - | - |

**Table 939 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration      |               |                          |   |
|------------------------|---------------|--------------------------|---|
| Mode:                  | 802.11a80 VLP | Duty Cycle (%):          | - |
| Data Rate:             | 12 Mbps       | DCCF (dB):               | - |
| Antenna Configuration: | SISO          | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | A (Core 0)    | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 6145                 | -9.96                                               | - | - | - |
| 6305                 | -9.31                                               | - | - | - |
| 6385                 | -8.86                                               | - | - | - |
| 6465                 | -9.49                                               | - | - | - |
| 6545                 | -8.97                                               | - | - | - |
| 6625                 | -9.70                                               | - | - | - |
| 6705                 | -10.72                                              | - | - | - |
| 6785                 | -10.91                                              | - | - | - |
| 6865                 | -10.15                                              | - | - | - |
| 6945                 | -9.40                                               | - | - | - |
| 7025                 | -9.35                                               | - | - | - |

**Table 940 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration      |                |                          |   |
|------------------------|----------------|--------------------------|---|
| Mode:                  | 802.11a160 VLP | Duty Cycle (%):          | - |
| Data Rate:             | 12 Mbps        | DCCF (dB):               | - |
| Antenna Configuration: | SISO           | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | A (Core 0)     | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 6185                 | -9.22                                               | - | - | - |
| 6345                 | -8.84                                               | - | - | - |
| 6505                 | -6.55                                               | - | - | - |
| 6665                 | -8.03                                               | - | - | - |
| 6825                 | -7.78                                               | - | - | - |
| 6985                 | -7.55                                               | - | - | - |

**Table 941 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                      |                          |   |
|---------------------------|----------------------|--------------------------|---|
| Mode:                     | 802.11ax HE20 SU VLP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1               | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                 | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)           | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 6115                 | -16.59                                              | - | - | - |
| 6275                 | -16.72                                              | - | - | - |
| 6395                 | -16.13                                              | - | - | - |
| 6415                 | -16.10                                              | - | - | - |
| 6435                 | -15.29                                              | - | - | - |
| 6475                 | -14.46                                              | - | - | - |
| 6515                 | -15.64                                              | - | - | - |
| 6535                 | -15.31                                              | - | - | - |
| 6695                 | -15.74                                              | - | - | - |
| 6855                 | -16.02                                              | - | - | - |
| 6875                 | -15.93                                              | - | - | - |
| 6895                 | -16.23                                              | - | - | - |
| 6995                 | -16.58                                              | - | - | - |
| 7095                 | -15.88                                              | - | - | - |

**Table 942 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                      |                          |   |
|---------------------------|----------------------|--------------------------|---|
| Mode:                     | 802.11ax HE40 SU VLP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1               | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                 | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)           | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 6125                 | -10.56                                              | - | - | - |
| 6285                 | -10.61                                              | - | - | - |
| 6405                 | -9.67                                               | - | - | - |
| 6445                 | -10.51                                              | - | - | - |
| 6485                 | -9.86                                               | - | - | - |
| 6525                 | -9.24                                               | - | - | - |
| 6565                 | -10.85                                              | - | - | - |
| 6725                 | -11.48                                              | - | - | - |
| 6845                 | -11.63                                              | - | - | - |
| 6885                 | -11.43                                              | - | - | - |
| 6925                 | -11.35                                              | - | - | - |
| 7005                 | -11.21                                              | - | - | - |
| 7085                 | -11.05                                              | - | - | - |

**Table 943 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                      |                          |   |
|---------------------------|----------------------|--------------------------|---|
| Mode:                     | 802.11ax HE80 SU VLP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1               | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                 | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)           | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 6145                 | -9.27                                               | - | - | - |
| 6305                 | -8.22                                               | - | - | - |
| 6385                 | -8.78                                               | - | - | - |
| 6465                 | -8.83                                               | - | - | - |
| 6545                 | -7.47                                               | - | - | - |
| 6625                 | -9.43                                               | - | - | - |
| 6705                 | -8.69                                               | - | - | - |
| 6785                 | -8.63                                               | - | - | - |
| 6865                 | -8.43                                               | - | - | - |
| 6945                 | -7.53                                               | - | - | - |
| 7025                 | -9.41                                               | - | - | - |

**Table 944 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                       |                          |   |
|---------------------------|-----------------------|--------------------------|---|
| Mode:                     | 802.11ax HE160 SU VLP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                  | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)            | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 6185                 | -8.31                                               | - | - | - |
| 6345                 | -8.05                                               | - | - | - |
| 6505                 | -5.37                                               | - | - | - |
| 6665                 | -7.52                                               | - | - | - |
| 6825                 | -7.26                                               | - | - | - |
| 6985                 | -7.19                                               | - | - | - |

**Table 945 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                        |                          |   |
|---------------------------|------------------------|--------------------------|---|
| Mode:                     | 802.11ax HE20 RU52 VLP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                 | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                   | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)             | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 6115 (RU52.37)       | -13.07                                              | - | - | - |
| 6275 (RU52.37)       | -14.08                                              | - | - | - |
| 6415 (RU52.40)       | -12.41                                              | - | - | - |
| 6435 (RU52.37)       | -12.48                                              | - | - | - |
| 6475 (RU52.37)       | -12.65                                              | - | - | - |
| 6515 (RU52.40)       | -12.45                                              | - | - | - |
| 6535 (RU52.37)       | -13.84                                              | - | - | - |
| 6695 (RU52.37)       | -13.85                                              | - | - | - |
| 6855 (RU52.40)       | -12.38                                              | - | - | - |
| 6875 (RU52.38)       | -17.53                                              | - | - | - |
| 6875 (RU52.39)       | -17.76                                              | - | - | - |
| 6895 (RU52.37)       | -12.29                                              | - | - | - |
| 6995 (RU52.37)       | -13.14                                              | - | - | - |
| 7095 (RU52.40)       | -12.89                                              | - | - | - |

**Table 946 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                         |                          |   |
|---------------------------|-------------------------|--------------------------|---|
| Mode:                     | 802.11ax HE20 RU106 VLP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                  | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                    | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)              | Active Chain Id(s):      | 0 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|----------------------|-----------------------------------------------------|---|---|---|
|                      | A                                                   | B | C | D |
| 6115 (RU106.53)      | -14.13                                              | - | - | - |
| 6275 (RU106.53)      | -12.74                                              | - | - | - |
| 6395 (RU106.53)      | -15.03                                              | - | - | - |
| 6415 (RU106.54)      | -13.14                                              | - | - | - |
| 6435 (RU106.53)      | -13.36                                              | - | - | - |
| 6475 (RU106.53)      | -14.55                                              | - | - | - |
| 6515 (RU106.54)      | -13.56                                              | - | - | - |
| 6535 (RU106.53)      | -12.24                                              | - | - | - |
| 6695 (RU106.53)      | -15.28                                              | - | - | - |
| 6855 (RU106.54)      | -13.70                                              | - | - | - |
| 6875 (RU106.53)      | -12.90                                              | - | - | - |
| 6875 (RU106.54)      | -13.95                                              | - | - | - |
| 6895 (RU106.53)      | -15.02                                              | - | - | - |
| 6995 (RU106.53)      | -14.12                                              | - | - | - |
| 7095 (RU106.54)      | -14.03                                              | - | - | - |

**Table 947 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                            |                          |   |
|---------------------------|--------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT20 RU Size 52 + RU Size 26 VLP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                     | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                       | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)                                 | Active Chain Id(s):      | 0 |

| Test Frequency (MHz)              | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|-----------------------------------|-----------------------------------------------------|---|---|---|
|                                   | A                                                   | B | C | D |
| 6115 (RU Size 52 + RU Size 26.70) | -16.56                                              | - | - | - |
| 6275 (RU Size 52 + RU Size 26.70) | -17.46                                              | - | - | - |
| 6395 (RU Size 52 + RU Size 26.70) | -15.39                                              | - | - | - |
| 6415 (RU Size 52 + RU Size 26.72) | -15.04                                              | - | - | - |
| 6435 (RU Size 52 + RU Size 26.70) | -16.15                                              | - | - | - |
| 6475 (RU Size 52 + RU Size 26.70) | -17.63                                              | - | - | - |
| 6515 (RU Size 52 + RU Size 26.72) | -15.71                                              | - | - | - |
| 6535 (RU Size 52 + RU Size 26.70) | -16.27                                              | - | - | - |
| 6695 (RU Size 52 + RU Size 26.70) | -16.78                                              | - | - | - |
| 6855 (RU Size 52 + RU Size 26.72) | -15.43                                              | - | - | - |
| 6875 (RU Size 52 + RU Size 26.70) | -16.65                                              | - | - | - |
| 6875 (RU Size 52 + RU Size 26.72) | -17.56                                              | - | - | - |
| 6895 (RU Size 52 + RU Size 26.70) | -17.50                                              | - | - | - |
| 6995 (RU Size 52 + RU Size 26.70) | -16.76                                              | - | - | - |
| 7095 (RU Size 52 + RU Size 26.72) | -14.98                                              | - | - | - |

**Table 948 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                             |                          |   |
|---------------------------|---------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT20 RU Size 106 + RU Size 26 VLP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                      | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                        | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)                                  | Active Chain Id(s):      | 0 |

| Test Frequency (MHz)               | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|------------------------------------|-----------------------------------------------------|---|---|---|
|                                    | A                                                   | B | C | D |
| 6115 (RU Size 106 + RU Size 26.82) | -15.94                                              | - | - | - |
| 6275 (RU Size 106 + RU Size 26.82) | -14.69                                              | - | - | - |
| 6415 (RU Size 106 + RU Size 26.83) | -13.50                                              | - | - | - |
| 6435 (RU Size 106 + RU Size 26.82) | -15.50                                              | - | - | - |
| 6475 (RU Size 106 + RU Size 26.82) | -15.11                                              | - | - | - |
| 6515 (RU Size 106 + RU Size 26.83) | -13.65                                              | - | - | - |
| 6535 (RU Size 106 + RU Size 26.82) | -14.93                                              | - | - | - |
| 6695 (RU Size 106 + RU Size 26.82) | -13.39                                              | - | - | - |
| 6855 (RU Size 106 + RU Size 26.83) | -12.68                                              | - | - | - |
| 6875 (RU Size 106 + RU Size 26.82) | -15.97                                              | - | - | - |
| 6875 (RU Size 106 + RU Size 26.83) | -13.61                                              | - | - | - |
| 6895 (RU Size 106 + RU Size 26.82) | -14.30                                              | - | - | - |
| 6995 (RU Size 106 + RU Size 26.82) | -16.11                                              | - | - | - |
| 7095 (RU Size 106 + RU Size 26.83) | -12.76                                              | - | - | - |

**Table 949 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                              |                          |   |
|---------------------------|----------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT80 RU Size 484 + RU Size 242 VLP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                       | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                         | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)                                   | Active Chain Id(s):      | 0 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|-------------------------------------|-----------------------------------------------------|---|---|---|
|                                     | A                                                   | B | C | D |
| 6145 (RU Size 484 + RU Size 242.92) | -8.45                                               | - | - | - |
| 6145 (RU Size 484 + RU Size 242.93) | -9.54                                               | - | - | - |
| 6305 (RU Size 484 + RU Size 242.92) | -8.45                                               | - | - | - |
| 6385 (RU Size 484 + RU Size 242.90) | -9.37                                               | - | - | - |
| 6465 (RU Size 484 + RU Size 242.93) | -9.85                                               | - | - | - |
| 6545 (RU Size 484 + RU Size 242.90) | -9.26                                               | - | - | - |
| 6545 (RU Size 484 + RU Size 242.93) | -9.65                                               | - | - | - |
| 6625 (RU Size 484 + RU Size 242.93) | -9.30                                               | - | - | - |
| 6705 (RU Size 484 + RU Size 242.91) | -9.67                                               | - | - | - |
| 6785 (RU Size 484 + RU Size 242.90) | -9.38                                               | - | - | - |
| 6865 (RU Size 484 + RU Size 242.90) | -10.58                                              | - | - | - |
| 6865 (RU Size 484 + RU Size 242.93) | -11.04                                              | - | - | - |
| 6945 (RU Size 484 + RU Size 242.93) | -7.24                                               | - | - | - |
| 7025 (RU Size 484 + RU Size 242.90) | -8.97                                               | - | - | - |

**Table 950 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                                         |                          |   |
|---------------------------|---------------------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 VLP (Primary) | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                                  | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                                    | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)                                              | Active Chain Id(s):      | 0 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|-------------------------------------|-----------------------------------------------------|---|---|---|
|                                     | A                                                   | B | C | D |
| 6185 (RU Size 996 + RU Size 484.95) | -8.06                                               | - | - | - |
| 6345 (RU Size 996 + RU Size 484.94) | -8.39                                               | - | - | - |
| 6505 (RU Size 996 + RU Size 484.94) | -6.65                                               | - | - | - |
| 6665 (RU Size 996 + RU Size 484.94) | -7.21                                               | - | - | - |
| 6825 (RU Size 996 + RU Size 484.94) | -8.14                                               | - | - | - |
| 6985 (RU Size 996 + RU Size 484.94) | -7.52                                               | - | - | - |

**Table 951 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                                           |                          |   |
|---------------------------|-----------------------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 VLP (Secondary) | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                                    | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                                      | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)                                                | Active Chain Id(s):      | 0 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|-------------------------------------|-----------------------------------------------------|---|---|---|
|                                     | A                                                   | B | C | D |
| 6185 (RU Size 996 + RU Size 484.94) | -8.22                                               | - | - | - |
| 6185 (RU Size 996 + RU Size 484.95) | -8.33                                               | - | - | - |
| 6505 (RU Size 996 + RU Size 484.95) | -6.48                                               | - | - | - |
| 6665 (RU Size 996 + RU Size 484.95) | -7.59                                               | - | - | - |
| 6825 (RU Size 996 + RU Size 484.95) | -8.05                                               | - | - | - |
| 6985 (RU Size 996 + RU Size 484.95) | -7.18                                               | - | - | - |

**Table 952 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                                                       |                          |   |
|---------------------------|-----------------------------------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 VLP (Primary) | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                                                | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                                                  | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)                                                            | Active Chain Id(s):      | 0 |

| Test Frequency (MHz)                              | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|---------------------------------------------------|-----------------------------------------------------|---|---|---|
|                                                   | A                                                   | B | C | D |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.97) | -7.91                                               | - | - | - |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.98) | -7.80                                               | - | - | - |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.99) | -7.94                                               | - | - | - |
| 6345 (RU Size 996 + RU Size 484 + RU Size 242.96) | -7.61                                               | - | - | - |
| 6505 (RU Size 996 + RU Size 484 + RU Size 242.96) | -6.45                                               | - | - | - |
| 6665 (RU Size 996 + RU Size 484 + RU Size 242.96) | -7.94                                               | - | - | - |
| 6825 (RU Size 996 + RU Size 484 + RU Size 242.96) | -7.74                                               | - | - | - |
| 6985 (RU Size 996 + RU Size 484 + RU Size 242.96) | -7.09                                               | - | - | - |

**Table 953 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                                                                         |                          |   |
|---------------------------|-------------------------------------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 VLP (Secondary) | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                                                  | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                                                    | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | A (Core 0)                                                              | Active Chain Id(s):      | 0 |

| Test Frequency (MHz)                              | Unwanted Emissions Within the RLAN Band Margin (dB) |   |   |   |
|---------------------------------------------------|-----------------------------------------------------|---|---|---|
|                                                   | A                                                   | B | C | D |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.99) | -8.04                                               | - | - | - |
| 6505 (RU Size 996 + RU Size 484 + RU Size 242.99) | -6.27                                               | - | - | - |
| 6665 (RU Size 996 + RU Size 484 + RU Size 242.99) | -6.98                                               | - | - | - |
| 6825 (RU Size 996 + RU Size 484 + RU Size 242.99) | -7.62                                               | - | - | - |
| 6985 (RU Size 996 + RU Size 484 + RU Size 242.99) | -7.17                                               | - | - | - |

**Table 954 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration      |               |                          |   |
|------------------------|---------------|--------------------------|---|
| Mode:                  | 802.11a20 LPI | Duty Cycle (%):          | - |
| Data Rate:             | 12 Mbps       | DCCF (dB):               | - |
| Antenna Configuration: | SISO          | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | B (Core 1)    | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5955                 | -                                                   | -14.91 | - | - |
| 6195                 | -                                                   | -15.18 | - | - |
| 6415                 | -                                                   | -14.02 | - | - |
| 6435                 | -                                                   | -14.68 | - | - |
| 6475                 | -                                                   | -15.12 | - | - |
| 6515                 | -                                                   | -15.19 | - | - |
| 6535                 | -                                                   | -16.17 | - | - |
| 6695                 | -                                                   | -15.98 | - | - |
| 6855                 | -                                                   | -15.42 | - | - |
| 6875                 | -                                                   | -14.37 | - | - |
| 6895                 | -                                                   | -14.31 | - | - |
| 7015                 | -                                                   | -14.42 | - | - |
| 7095                 | -                                                   | -14.89 | - | - |
| 7115                 | -                                                   | -15.21 | - | - |

**Table 955 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration      |               |                          |   |
|------------------------|---------------|--------------------------|---|
| Mode:                  | 802.11a40 LPI | Duty Cycle (%):          | - |
| Data Rate:             | 12 Mbps       | DCCF (dB):               | - |
| Antenna Configuration: | SISO          | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | B (Core 1)    | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5965                 | -                                                   | -10.48 | - | - |
| 6205                 | -                                                   | -9.10  | - | - |
| 6405                 | -                                                   | -10.29 | - | - |
| 6445                 | -                                                   | -9.49  | - | - |
| 6485                 | -                                                   | -9.38  | - | - |
| 6525                 | -                                                   | -9.27  | - | - |
| 6565                 | -                                                   | -9.46  | - | - |
| 6725                 | -                                                   | -9.92  | - | - |
| 6845                 | -                                                   | -10.08 | - | - |
| 6925                 | -                                                   | -10.14 | - | - |
| 7005                 | -                                                   | -11.39 | - | - |
| 7085                 | -                                                   | -9.28  | - | - |

**Table 956 - Unwanted Emissions Within the Band Results**



| Test Configuration |                              |                 |                     |
|--------------------|------------------------------|-----------------|---------------------|
| Frequency Range:   | 6.875-7.125 GHz              | Band:           | U-NII-8             |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2 | Test Method(s): | KDB 987594 clause j |

| DUT Configuration      |               |                          |   |
|------------------------|---------------|--------------------------|---|
| Mode:                  | 802.11a40 LPI | Duty Cycle (%):          | - |
| Data Rate:             | 24 Mbps       | DCCF (dB):               | - |
| Antenna Configuration: | SISO          | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | B (Core 1)    | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 6885                 | -                                                   | -11.79 | - | - |

**Table 957 - Unwanted Emissions Within the Band Results**

| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration      |               |                          |   |
|------------------------|---------------|--------------------------|---|
| Mode:                  | 802.11a80 LPI | Duty Cycle (%):          | - |
| Data Rate:             | 12 Mbps       | DCCF (dB):               | - |
| Antenna Configuration: | SISO          | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | B (Core 1)    | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5985                 | -                                                   | -10.99 | - | - |
| 6225                 | -                                                   | -10.94 | - | - |
| 6385                 | -                                                   | -10.46 | - | - |
| 6465                 | -                                                   | -9.69  | - | - |
| 6545                 | -                                                   | -8.20  | - | - |
| 6625                 | -                                                   | -10.10 | - | - |
| 6705                 | -                                                   | -9.25  | - | - |
| 6785                 | -                                                   | -9.20  | - | - |
| 6865                 | -                                                   | -9.14  | - | - |
| 7025                 | -                                                   | -10.45 | - | - |

**Table 958 - Unwanted Emissions Within the Band Results**



| Test Configuration |                              |                 |                     |
|--------------------|------------------------------|-----------------|---------------------|
| Frequency Range:   | 6.875-7.125 GHz              | Band:           | U-NII-8             |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2 | Test Method(s): | KDB 987594 clause j |

| DUT Configuration      |               |                          |   |
|------------------------|---------------|--------------------------|---|
| Mode:                  | 802.11a80 LPI | Duty Cycle (%):          | - |
| Data Rate:             | 24 Mbps       | DCCF (dB):               | - |
| Antenna Configuration: | SISO          | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | B (Core 1)    | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|----------------------|-----------------------------------------------------|-------|---|---|
|                      | A                                                   | B     | C | D |
| 6945                 | -                                                   | -9.42 | - | - |

**Table 959 - Unwanted Emissions Within the Band Results**

| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration      |                |                          |   |
|------------------------|----------------|--------------------------|---|
| Mode:                  | 802.11a160 LPI | Duty Cycle (%):          | - |
| Data Rate:             | 12 Mbps        | DCCF (dB):               | - |
| Antenna Configuration: | SISO           | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | B (Core 1)     | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|----------------------|-----------------------------------------------------|-------|---|---|
|                      | A                                                   | B     | C | D |
| 6025                 | -                                                   | -9.20 | - | - |
| 6185                 | -                                                   | -8.87 | - | - |
| 6345                 | -                                                   | -7.80 | - | - |
| 6505                 | -                                                   | -8.97 | - | - |
| 6665                 | -                                                   | -7.94 | - | - |
| 6825                 | -                                                   | -8.26 | - | - |
| 6985                 | -                                                   | -7.34 | - | - |

**Table 960 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                      |                          |   |
|---------------------------|----------------------|--------------------------|---|
| Mode:                     | 802.11ax HE20 SU LPI | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1               | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                 | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)           | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5955                 | -                                                   | -17.48 | - | - |
| 6195                 | -                                                   | -16.63 | - | - |
| 6415                 | -                                                   | -14.22 | - | - |
| 6435                 | -                                                   | -17.81 | - | - |
| 6475                 | -                                                   | -16.70 | - | - |
| 6515                 | -                                                   | -16.95 | - | - |
| 6535                 | -                                                   | -17.29 | - | - |
| 6695                 | -                                                   | -15.62 | - | - |
| 6855                 | -                                                   | -17.11 | - | - |
| 6875                 | -                                                   | -17.05 | - | - |
| 6895                 | -                                                   | -14.04 | - | - |
| 6995                 | -                                                   | -15.50 | - | - |
| 7095                 | -                                                   | -15.84 | - | - |

**Table 961 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                      |                          |   |
|---------------------------|----------------------|--------------------------|---|
| Mode:                     | 802.11ax HE40 SU LPI | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1               | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                 | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)           | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5965                 | -                                                   | -10.61 | - | - |
| 6205                 | -                                                   | -10.55 | - | - |
| 6405                 | -                                                   | -10.69 | - | - |
| 6445                 | -                                                   | -9.52  | - | - |
| 6485                 | -                                                   | -9.47  | - | - |
| 6525                 | -                                                   | -9.22  | - | - |
| 6565                 | -                                                   | -9.43  | - | - |
| 6725                 | -                                                   | -9.60  | - | - |
| 6845                 | -                                                   | -10.02 | - | - |
| 6885                 | -                                                   | -11.68 | - | - |
| 6925                 | -                                                   | -11.65 | - | - |
| 7005                 | -                                                   | -11.35 | - | - |
| 7085                 | -                                                   | -9.07  | - | - |

**Table 962 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                      |                          |   |
|---------------------------|----------------------|--------------------------|---|
| Mode:                     | 802.11ax HE80 SU LPI | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1               | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                 | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)           | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|----------------------|-----------------------------------------------------|-------|---|---|
|                      | A                                                   | B     | C | D |
| 5985                 | -                                                   | -8.82 | - | - |
| 6225                 | -                                                   | -9.12 | - | - |
| 6385                 | -                                                   | -8.83 | - | - |
| 6465                 | -                                                   | -9.65 | - | - |
| 6545                 | -                                                   | -9.74 | - | - |
| 6625                 | -                                                   | -8.59 | - | - |
| 6705                 | -                                                   | -8.10 | - | - |
| 6785                 | -                                                   | -9.40 | - | - |
| 6865                 | -                                                   | -9.37 | - | - |
| 6945                 | -                                                   | -9.31 | - | - |
| 7025                 | -                                                   | -7.63 | - | - |

**Table 963 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                       |                          |   |
|---------------------------|-----------------------|--------------------------|---|
| Mode:                     | 802.11ax HE160 SU LPI | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                  | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)            | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|----------------------|-----------------------------------------------------|-------|---|---|
|                      | A                                                   | B     | C | D |
| 6025                 | -                                                   | -7.91 | - | - |
| 6185                 | -                                                   | -7.70 | - | - |
| 6345                 | -                                                   | -7.12 | - | - |
| 6505                 | -                                                   | -6.82 | - | - |
| 6665                 | -                                                   | -7.28 | - | - |
| 6825                 | -                                                   | -7.23 | - | - |
| 6985                 | -                                                   | -6.45 | - | - |

**Table 964 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                        |                          |   |
|---------------------------|------------------------|--------------------------|---|
| Mode:                     | 802.11ax HE20 RU26 LPI | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                 | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                   | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)             | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5955 (RU26.0)        | -                                                   | -12.18 | - | - |
| 6195 (RU26.0)        | -                                                   | -12.46 | - | - |
| 6415 (RU26.8)        | -                                                   | -12.67 | - | - |
| 6435 (RU26.0)        | -                                                   | -14.27 | - | - |
| 6475 (RU26.0)        | -                                                   | -13.40 | - | - |
| 6515 (RU26.8)        | -                                                   | -12.50 | - | - |
| 6535 (RU26.0)        | -                                                   | -11.82 | - | - |
| 6695 (RU26.0)        | -                                                   | -13.24 | - | - |
| 6855 (RU26.8)        | -                                                   | -12.74 | - | - |
| 6875 (RU26.3)        | -                                                   | -20.85 | - | - |
| 6875 (RU26.5)        | -                                                   | -21.12 | - | - |
| 6895 (RU26.0)        | -                                                   | -13.86 | - | - |
| 6995 (RU26.0)        | -                                                   | -13.16 | - | - |
| 7095 (RU26.8)        | -                                                   | -12.95 | - | - |

**Table 965 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                        |                          |   |
|---------------------------|------------------------|--------------------------|---|
| Mode:                     | 802.11ax HE20 RU52 LPI | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                 | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                   | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)             | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5955 (RU52.37)       | -                                                   | -11.91 | - | - |
| 6195 (RU52.37)       | -                                                   | -12.06 | - | - |
| 6415 (RU52.40)       | -                                                   | -13.28 | - | - |
| 6435 (RU52.37)       | -                                                   | -13.64 | - | - |
| 6475 (RU52.37)       | -                                                   | -12.67 | - | - |
| 6515 (RU52.40)       | -                                                   | -12.92 | - | - |
| 6535 (RU52.37)       | -                                                   | -12.85 | - | - |
| 6695 (RU52.37)       | -                                                   | -12.65 | - | - |
| 6855 (RU52.40)       | -                                                   | -12.28 | - | - |
| 6875 (RU52.38)       | -                                                   | -19.89 | - | - |
| 6875 (RU52.39)       | -                                                   | -20.44 | - | - |
| 6895 (RU52.37)       | -                                                   | -13.62 | - | - |
| 6995 (RU52.37)       | -                                                   | -12.00 | - | - |
| 7095 (RU52.40)       | -                                                   | -13.34 | - | - |

**Table 966 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                         |                          |   |
|---------------------------|-------------------------|--------------------------|---|
| Mode:                     | 802.11ax HE20 RU106 LPI | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                  | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                    | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)              | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5955 (RU106.53)      | -                                                   | -15.00 | - | - |
| 6195 (RU106.53)      | -                                                   | -13.80 | - | - |
| 6395 (RU106.53)      | -                                                   | -12.57 | - | - |
| 6415 (RU106.54)      | -                                                   | -14.09 | - | - |
| 6435 (RU106.53)      | -                                                   | -13.61 | - | - |
| 6475 (RU106.53)      | -                                                   | -13.54 | - | - |
| 6515 (RU106.54)      | -                                                   | -15.35 | - | - |
| 6535 (RU106.53)      | -                                                   | -13.04 | - | - |
| 6695 (RU106.53)      | -                                                   | -13.99 | - | - |
| 6855 (RU106.54)      | -                                                   | -14.89 | - | - |
| 6875 (RU106.53)      | -                                                   | -13.42 | - | - |
| 6875 (RU106.54)      | -                                                   | -14.31 | - | - |
| 6895 (RU106.53)      | -                                                   | -14.08 | - | - |
| 6995 (RU106.53)      | -                                                   | -14.98 | - | - |
| 7095 (RU106.54)      | -                                                   | -13.63 | - | - |

**Table 967 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                            |                          |   |
|---------------------------|--------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT20 RU Size 52 + RU Size 26 LPI | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                     | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                       | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)                                 | Active Chain Id(s):      | 1 |

| Test Frequency (MHz)              | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|-----------------------------------|-----------------------------------------------------|--------|---|---|
|                                   | A                                                   | B      | C | D |
| 5955 (RU Size 52 + RU Size 26.70) | -                                                   | -16.68 | - | - |
| 6195 (RU Size 52 + RU Size 26.70) | -                                                   | -17.10 | - | - |
| 6395 (RU Size 52 + RU Size 26.70) | -                                                   | -16.44 | - | - |
| 6415 (RU Size 52 + RU Size 26.72) | -                                                   | -16.07 | - | - |
| 6435 (RU Size 52 + RU Size 26.70) | -                                                   | -18.15 | - | - |
| 6475 (RU Size 52 + RU Size 26.70) | -                                                   | -16.31 | - | - |
| 6515 (RU Size 52 + RU Size 26.72) | -                                                   | -16.68 | - | - |
| 6535 (RU Size 52 + RU Size 26.70) | -                                                   | -16.80 | - | - |
| 6695 (RU Size 52 + RU Size 26.70) | -                                                   | -16.44 | - | - |
| 6855 (RU Size 52 + RU Size 26.72) | -                                                   | -17.04 | - | - |
| 6875 (RU Size 52 + RU Size 26.70) | -                                                   | -16.56 | - | - |
| 6875 (RU Size 52 + RU Size 26.72) | -                                                   | -15.59 | - | - |
| 6895 (RU Size 52 + RU Size 26.70) | -                                                   | -16.82 | - | - |
| 6995 (RU Size 52 + RU Size 26.70) | -                                                   | -17.35 | - | - |
| 7095 (RU Size 52 + RU Size 26.72) | -                                                   | -17.18 | - | - |

**Table 968 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                             |                          |   |
|---------------------------|---------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT20 RU Size 106 + RU Size 26 LPI | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                      | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                        | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)                                  | Active Chain Id(s):      | 1 |

| Test Frequency (MHz)               | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|------------------------------------|-----------------------------------------------------|--------|---|---|
|                                    | A                                                   | B      | C | D |
| 5955 (RU Size 106 + RU Size 26.82) | -                                                   | -14.19 | - | - |
| 6195 (RU Size 106 + RU Size 26.82) | -                                                   | -15.24 | - | - |
| 6415 (RU Size 106 + RU Size 26.83) | -                                                   | -13.50 | - | - |
| 6435 (RU Size 106 + RU Size 26.82) | -                                                   | -15.09 | - | - |
| 6475 (RU Size 106 + RU Size 26.82) | -                                                   | -15.41 | - | - |
| 6515 (RU Size 106 + RU Size 26.83) | -                                                   | -13.24 | - | - |
| 6535 (RU Size 106 + RU Size 26.82) | -                                                   | -14.65 | - | - |
| 6695 (RU Size 106 + RU Size 26.82) | -                                                   | -14.98 | - | - |
| 6855 (RU Size 106 + RU Size 26.83) | -                                                   | -14.41 | - | - |
| 6875 (RU Size 106 + RU Size 26.82) | -                                                   | -14.46 | - | - |
| 6875 (RU Size 106 + RU Size 26.83) | -                                                   | -12.36 | - | - |
| 6895 (RU Size 106 + RU Size 26.82) | -                                                   | -15.56 | - | - |
| 6995 (RU Size 106 + RU Size 26.82) | -                                                   | -14.06 | - | - |
| 7095 (RU Size 106 + RU Size 26.83) | -                                                   | -14.11 | - | - |

**Table 969 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                              |                          |   |
|---------------------------|----------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT80 RU Size 484 + RU Size 242 LPI | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                       | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                         | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)                                   | Active Chain Id(s):      | 1 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|-------------------------------------|-----------------------------------------------------|--------|---|---|
|                                     | A                                                   | B      | C | D |
| 5985 (RU Size 484 + RU Size 242.93) | -                                                   | -10.92 | - | - |
| 6225 (RU Size 484 + RU Size 242.92) | -                                                   | -10.95 | - | - |
| 6385 (RU Size 484 + RU Size 242.90) | -                                                   | -8.86  | - | - |
| 6465 (RU Size 484 + RU Size 242.93) | -                                                   | -9.49  | - | - |
| 6545 (RU Size 484 + RU Size 242.90) | -                                                   | -8.15  | - | - |
| 6545 (RU Size 484 + RU Size 242.93) | -                                                   | -8.18  | - | - |
| 6625 (RU Size 484 + RU Size 242.93) | -                                                   | -8.11  | - | - |
| 6705 (RU Size 484 + RU Size 242.91) | -                                                   | -9.93  | - | - |
| 6785 (RU Size 484 + RU Size 242.90) | -                                                   | -9.42  | - | - |
| 6865 (RU Size 484 + RU Size 242.90) | -                                                   | -9.18  | - | - |
| 6865 (RU Size 484 + RU Size 242.93) | -                                                   | -9.01  | - | - |
| 6945 (RU Size 484 + RU Size 242.93) | -                                                   | -8.94  | - | - |
| 7025 (RU Size 484 + RU Size 242.90) | -                                                   | -7.63  | - | - |

**Table 970 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                                         |                          |   |
|---------------------------|---------------------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 LPI (Primary) | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                                  | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                                    | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)                                              | Active Chain Id(s):      | 1 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|-------------------------------------|-----------------------------------------------------|-------|---|---|
|                                     | A                                                   | B     | C | D |
| 6185 (RU Size 996 + RU Size 484.95) | -                                                   | -8.07 | - | - |
| 6345 (RU Size 996 + RU Size 484.94) | -                                                   | -7.06 | - | - |
| 6505 (RU Size 996 + RU Size 484.94) | -                                                   | -7.74 | - | - |
| 6665 (RU Size 996 + RU Size 484.94) | -                                                   | -7.93 | - | - |
| 6825 (RU Size 996 + RU Size 484.94) | -                                                   | -7.55 | - | - |
| 6985 (RU Size 996 + RU Size 484.94) | -                                                   | -7.44 | - | - |

**Table 971 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                                           |                          |   |
|---------------------------|-----------------------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 LPI (Secondary) | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                                    | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                                      | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)                                                | Active Chain Id(s):      | 1 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|-------------------------------------|-----------------------------------------------------|-------|---|---|
|                                     | A                                                   | B     | C | D |
| 6025 (RU Size 996 + RU Size 484.95) | -                                                   | -8.23 | - | - |
| 6185 (RU Size 996 + RU Size 484.94) | -                                                   | -8.38 | - | - |
| 6505 (RU Size 996 + RU Size 484.95) | -                                                   | -7.49 | - | - |
| 6665 (RU Size 996 + RU Size 484.95) | -                                                   | -8.04 | - | - |
| 6825 (RU Size 996 + RU Size 484.95) | -                                                   | -7.18 | - | - |
| 6985 (RU Size 996 + RU Size 484.95) | -                                                   | -7.46 | - | - |

**Table 972 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                                                       |                          |   |
|---------------------------|-----------------------------------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 LPI (Primary) | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                                                | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                                                  | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)                                                            | Active Chain Id(s):      | 1 |

| Test Frequency (MHz)                              | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|---------------------------------------------------|-----------------------------------------------------|-------|---|---|
|                                                   | A                                                   | B     | C | D |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.97) | -                                                   | -7.42 | - | - |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.98) | -                                                   | -7.57 | - | - |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.99) | -                                                   | -8.01 | - | - |
| 6345 (RU Size 996 + RU Size 484 + RU Size 242.96) | -                                                   | -7.90 | - | - |
| 6505 (RU Size 996 + RU Size 484 + RU Size 242.96) | -                                                   | -7.73 | - | - |
| 6665 (RU Size 996 + RU Size 484 + RU Size 242.96) | -                                                   | -7.83 | - | - |
| 6825 (RU Size 996 + RU Size 484 + RU Size 242.96) | -                                                   | -7.38 | - | - |
| 6985 (RU Size 996 + RU Size 484 + RU Size 242.96) | -                                                   | -7.55 | - | - |

**Table 973 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                                                         |                          |   |
|---------------------------|-------------------------------------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 LPI (Secondary) | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                                                  | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                                                    | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)                                                              | Active Chain Id(s):      | 1 |

| Test Frequency (MHz)                              | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|---------------------------------------------------|-----------------------------------------------------|-------|---|---|
|                                                   | A                                                   | B     | C | D |
| 6025 (RU Size 996 + RU Size 484 + RU Size 242.99) | -                                                   | -8.00 | - | - |
| 6505 (RU Size 996 + RU Size 484 + RU Size 242.99) | -                                                   | -7.97 | - | - |
| 6665 (RU Size 996 + RU Size 484 + RU Size 242.99) | -                                                   | -8.02 | - | - |
| 6825 (RU Size 996 + RU Size 484 + RU Size 242.99) | -                                                   | -7.11 | - | - |
| 6985 (RU Size 996 + RU Size 484 + RU Size 242.99) | -                                                   | -7.64 | - | - |

**Table 974 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration      |              |                          |   |
|------------------------|--------------|--------------------------|---|
| Mode:                  | 802.11a20 SP | Duty Cycle (%):          | - |
| Data Rate:             | 12 Mbps      | DCCF (dB):               | - |
| Antenna Configuration: | SISO         | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | B (Core 1)   | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5955                 | -                                                   | -14.56 | - | - |
| 6195                 | -                                                   | -15.62 | - | - |
| 6415                 | -                                                   | -15.53 | - | - |
| 6435                 | -                                                   | -13.46 | - | - |
| 6475                 | -                                                   | -14.36 | - | - |
| 6515                 | -                                                   | -14.17 | - | - |
| 6535                 | -                                                   | -15.09 | - | - |
| 6695                 | -                                                   | -14.35 | - | - |
| 6855                 | -                                                   | -15.39 | - | - |

**Table 975 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration      |              |                          |   |
|------------------------|--------------|--------------------------|---|
| Mode:                  | 802.11a40 SP | Duty Cycle (%):          | - |
| Data Rate:             | 12 Mbps      | DCCF (dB):               | - |
| Antenna Configuration: | SISO         | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | B (Core 1)   | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5965                 | -                                                   | -10.89 | - | - |
| 6205                 | -                                                   | -10.81 | - | - |
| 6405                 | -                                                   | -9.81  | - | - |
| 6445                 | -                                                   | -9.77  | - | - |
| 6485                 | -                                                   | -11.19 | - | - |
| 6525                 | -                                                   | -11.54 | - | - |
| 6565                 | -                                                   | -11.50 | - | - |
| 6725                 | -                                                   | -11.16 | - | - |
| 6845                 | -                                                   | -12.23 | - | - |

**Table 976 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration      |              |                          |   |
|------------------------|--------------|--------------------------|---|
| Mode:                  | 802.11a80 SP | Duty Cycle (%):          | - |
| Data Rate:             | 12 Mbps      | DCCF (dB):               | - |
| Antenna Configuration: | SISO         | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | B (Core 1)   | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5985                 | -                                                   | -11.10 | - | - |
| 6225                 | -                                                   | -10.81 | - | - |
| 6385                 | -                                                   | -10.02 | - | - |
| 6465                 | -                                                   | -10.04 | - | - |
| 6545                 | -                                                   | -9.71  | - | - |
| 6625                 | -                                                   | -9.95  | - | - |
| 6705                 | -                                                   | -10.69 | - | - |
| 6785                 | -                                                   | -10.76 | - | - |

**Table 977 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration      |               |                          |   |
|------------------------|---------------|--------------------------|---|
| Mode:                  | 802.11a160 SP | Duty Cycle (%):          | - |
| Data Rate:             | 12 Mbps       | DCCF (dB):               | - |
| Antenna Configuration: | SISO          | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | B (Core 1)    | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|----------------------|-----------------------------------------------------|-------|---|---|
|                      | A                                                   | B     | C | D |
| 6025                 | -                                                   | -7.78 | - | - |
| 6185                 | -                                                   | -3.58 | - | - |
| 6345                 | -                                                   | -6.42 | - | - |
| 6505                 | -                                                   | -4.86 | - | - |
| 6665                 | -                                                   | -3.55 | - | - |

**Table 978 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                     |                          |   |
|---------------------------|---------------------|--------------------------|---|
| Mode:                     | 802.11ax HE20 SU SP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1              | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)          | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5955                 | -                                                   | -17.74 | - | - |
| 6195                 | -                                                   | -17.72 | - | - |
| 6415                 | -                                                   | -17.53 | - | - |
| 6435                 | -                                                   | -15.65 | - | - |
| 6475                 | -                                                   | -17.20 | - | - |
| 6515                 | -                                                   | -16.63 | - | - |
| 6535                 | -                                                   | -17.26 | - | - |
| 6695                 | -                                                   | -16.63 | - | - |
| 6855                 | -                                                   | -16.92 | - | - |

**Table 979 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                     |                          |   |
|---------------------------|---------------------|--------------------------|---|
| Mode:                     | 802.11ax HE40 SU SP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1              | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)          | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5965                 | -                                                   | -9.17  | - | - |
| 6205                 | -                                                   | -10.37 | - | - |
| 6405                 | -                                                   | -9.49  | - | - |
| 6445                 | -                                                   | -11.38 | - | - |
| 6485                 | -                                                   | -9.29  | - | - |
| 6525                 | -                                                   | -9.17  | - | - |
| 6565                 | -                                                   | -9.49  | - | - |
| 6725                 | -                                                   | -11.67 | - | - |
| 6845                 | -                                                   | -11.25 | - | - |

**Table 980 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                     |                          |   |
|---------------------------|---------------------|--------------------------|---|
| Mode:                     | 802.11ax HE80 SU SP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1              | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)          | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5985                 | -                                                   | -10.40 | - | - |
| 6225                 | -                                                   | -9.04  | - | - |
| 6385                 | -                                                   | -7.30  | - | - |
| 6465                 | -                                                   | -9.60  | - | - |
| 6545                 | -                                                   | -9.33  | - | - |
| 6625                 | -                                                   | -10.14 | - | - |
| 6705                 | -                                                   | -9.60  | - | - |
| 6785                 | -                                                   | -8.59  | - | - |

**Table 981 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                      |                          |   |
|---------------------------|----------------------|--------------------------|---|
| Mode:                     | 802.11ax HE160 SU SP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1               | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                 | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)           | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|----------------------|-----------------------------------------------------|-------|---|---|
|                      | A                                                   | B     | C | D |
| 6025                 | -                                                   | -9.63 | - | - |
| 6185                 | -                                                   | -8.54 | - | - |
| 6345                 | -                                                   | -6.99 | - | - |
| 6505                 | -                                                   | -7.38 | - | - |
| 6665                 | -                                                   | -7.93 | - | - |

**Table 982 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                       |                          |   |
|---------------------------|-----------------------|--------------------------|---|
| Mode:                     | 802.11ax HE20 RU26 SP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                  | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)            | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5955 (RU26.0)        | -                                                   | -13.45 | - | - |
| 6195 (RU26.0)        | -                                                   | -12.79 | - | - |
| 6415 (RU26.8)        | -                                                   | -12.57 | - | - |
| 6435 (RU26.0)        | -                                                   | -12.42 | - | - |
| 6475 (RU26.0)        | -                                                   | -13.01 | - | - |
| 6515 (RU26.8)        | -                                                   | -12.37 | - | - |
| 6535 (RU26.0)        | -                                                   | -12.99 | - | - |
| 6695 (RU26.0)        | -                                                   | -12.61 | - | - |
| 6855 (RU26.8)        | -                                                   | -15.34 | - | - |

**Table 983 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                       |                          |   |
|---------------------------|-----------------------|--------------------------|---|
| Mode:                     | 802.11ax HE20 RU52 SP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                  | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)            | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5955 (RU52.37)       | -                                                   | -14.91 | - | - |
| 6195 (RU52.37)       | -                                                   | -14.08 | - | - |
| 6415 (RU52.40)       | -                                                   | -13.07 | - | - |
| 6435 (RU52.37)       | -                                                   | -13.39 | - | - |
| 6475 (RU52.37)       | -                                                   | -12.44 | - | - |
| 6515 (RU52.40)       | -                                                   | -12.98 | - | - |
| 6535 (RU52.37)       | -                                                   | -12.00 | - | - |
| 6695 (RU52.37)       | -                                                   | -13.43 | - | - |
| 6855 (RU52.40)       | -                                                   | -12.97 | - | - |

**Table 984 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                        |                          |   |
|---------------------------|------------------------|--------------------------|---|
| Mode:                     | 802.11ax HE20 RU106 SP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                 | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                   | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)             | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5955 (RU106.53)      | -                                                   | -14.92 | - | - |
| 6195 (RU106.53)      | -                                                   | -12.99 | - | - |
| 6415 (RU106.54)      | -                                                   | -14.96 | - | - |
| 6435 (RU106.53)      | -                                                   | -14.29 | - | - |
| 6475 (RU106.53)      | -                                                   | -14.63 | - | - |
| 6515 (RU106.54)      | -                                                   | -15.13 | - | - |
| 6535 (RU106.53)      | -                                                   | -13.26 | - | - |
| 6695 (RU106.53)      | -                                                   | -14.34 | - | - |
| 6855 (RU106.54)      | -                                                   | -13.66 | - | - |

**Table 985 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                                           |                          |   |
|---------------------------|-------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT20 RU Size 52 + RU Size 26 SP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                    | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                      | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)                                | Active Chain Id(s):      | 1 |

| Test Frequency (MHz)              | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|-----------------------------------|-----------------------------------------------------|--------|---|---|
|                                   | A                                                   | B      | C | D |
| 5955 (RU Size 52 + RU Size 26.70) | -                                                   | -18.35 | - | - |
| 6195 (RU Size 52 + RU Size 26.70) | -                                                   | -16.77 | - | - |
| 6415 (RU Size 52 + RU Size 26.72) | -                                                   | -16.27 | - | - |
| 6435 (RU Size 52 + RU Size 26.70) | -                                                   | -15.32 | - | - |
| 6475 (RU Size 52 + RU Size 26.70) | -                                                   | -17.25 | - | - |
| 6515 (RU Size 52 + RU Size 26.72) | -                                                   | -15.34 | - | - |
| 6535 (RU Size 52 + RU Size 26.70) | -                                                   | -15.99 | - | - |
| 6695 (RU Size 52 + RU Size 26.70) | -                                                   | -16.41 | - | - |
| 6855 (RU Size 52 + RU Size 26.72) | -                                                   | -15.69 | - | - |

**Table 986 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                                            |                          |   |
|---------------------------|--------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT20 RU Size 106 + RU Size 26 SP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                     | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                       | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)                                 | Active Chain Id(s):      | 1 |

| Test Frequency (MHz)               | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|------------------------------------|-----------------------------------------------------|--------|---|---|
|                                    | A                                                   | B      | C | D |
| 5955 (RU Size 106 + RU Size 26.82) | -                                                   | -15.57 | - | - |
| 6195 (RU Size 106 + RU Size 26.82) | -                                                   | -14.35 | - | - |
| 6415 (RU Size 106 + RU Size 26.83) | -                                                   | -13.51 | - | - |
| 6435 (RU Size 106 + RU Size 26.82) | -                                                   | -14.54 | - | - |
| 6475 (RU Size 106 + RU Size 26.82) | -                                                   | -14.54 | - | - |
| 6515 (RU Size 106 + RU Size 26.83) | -                                                   | -13.68 | - | - |
| 6535 (RU Size 106 + RU Size 26.82) | -                                                   | -14.93 | - | - |
| 6695 (RU Size 106 + RU Size 26.82) | -                                                   | -14.30 | - | - |
| 6855 (RU Size 106 + RU Size 26.83) | -                                                   | -13.14 | - | - |

**Table 987 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                                             |                          |   |
|---------------------------|---------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT80 RU Size 484 + RU Size 242 SP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                      | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                        | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)                                  | Active Chain Id(s):      | 1 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|-------------------------------------|-----------------------------------------------------|--------|---|---|
|                                     | A                                                   | B      | C | D |
| 5985 (RU Size 484 + RU Size 242.93) | -                                                   | -10.21 | - | - |
| 6225 (RU Size 484 + RU Size 242.92) | -                                                   | -7.97  | - | - |
| 6385 (RU Size 484 + RU Size 242.90) | -                                                   | -9.87  | - | - |
| 6465 (RU Size 484 + RU Size 242.93) | -                                                   | -9.19  | - | - |
| 6545 (RU Size 484 + RU Size 242.90) | -                                                   | -10.65 | - | - |
| 6545 (RU Size 484 + RU Size 242.93) | -                                                   | -8.99  | - | - |
| 6625 (RU Size 484 + RU Size 242.93) | -                                                   | -10.41 | - | - |
| 6705 (RU Size 484 + RU Size 242.91) | -                                                   | -7.77  | - | - |
| 6785 (RU Size 484 + RU Size 242.90) | -                                                   | -10.14 | - | - |

**Table 988 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                                                        |                          |   |
|---------------------------|--------------------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 SP (Primary) | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                                 | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                                   | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)                                             | Active Chain Id(s):      | 1 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|-------------------------------------|-----------------------------------------------------|-------|---|---|
|                                     | A                                                   | B     | C | D |
| 6185 (RU Size 996 + RU Size 484.95) | -                                                   | -7.31 | - | - |
| 6345 (RU Size 996 + RU Size 484.94) | -                                                   | -8.19 | - | - |
| 6505 (RU Size 996 + RU Size 484.94) | -                                                   | -8.63 | - | - |
| 6665 (RU Size 996 + RU Size 484.94) | -                                                   | -8.04 | - | - |

**Table 989 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                                                          |                          |   |
|---------------------------|----------------------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 SP (Secondary) | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                                   | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                                     | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)                                               | Active Chain Id(s):      | 1 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|-------------------------------------|-----------------------------------------------------|-------|---|---|
|                                     | A                                                   | B     | C | D |
| 6025 (RU Size 996 + RU Size 484.95) | -                                                   | -8.82 | - | - |
| 6185 (RU Size 996 + RU Size 484.94) | -                                                   | -6.49 | - | - |
| 6505 (RU Size 996 + RU Size 484.95) | -                                                   | -8.59 | - | - |
| 6665 (RU Size 996 + RU Size 484.95) | -                                                   | -7.76 | - | - |

**Table 990 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                                                                         |                          |   |
|---------------------------|-------------------------------------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242<br>SP (Primary) | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                                                  | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                                                    | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)                                                              | Active Chain Id(s):      | 1 |

| Test Frequency (MHz)                              | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|---------------------------------------------------|-----------------------------------------------------|-------|---|---|
|                                                   | A                                                   | B     | C | D |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.97) | -                                                   | -7.79 | - | - |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.98) | -                                                   | -8.55 | - | - |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.99) | -                                                   | -6.80 | - | - |
| 6345 (RU Size 996 + RU Size 484 + RU Size 242.96) | -                                                   | -8.27 | - | - |
| 6505 (RU Size 996 + RU Size 484 + RU Size 242.96) | -                                                   | -7.95 | - | - |
| 6665 (RU Size 996 + RU Size 484 + RU Size 242.96) | -                                                   | -8.94 | - | - |

**Table 991 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                                                                        |                          |   |
|---------------------------|------------------------------------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Secondary) | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                                                 | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                                                   | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)                                                             | Active Chain Id(s):      | 1 |

| Test Frequency (MHz)                              | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|---------------------------------------------------|-----------------------------------------------------|-------|---|---|
|                                                   | A                                                   | B     | C | D |
| 6025 (RU Size 996 + RU Size 484 + RU Size 242.99) | -                                                   | -8.66 | - | - |
| 6505 (RU Size 996 + RU Size 484 + RU Size 242.99) | -                                                   | -9.45 | - | - |
| 6665 (RU Size 996 + RU Size 484 + RU Size 242.99) | -                                                   | -8.51 | - | - |

**Table 992 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration      |               |                          |   |
|------------------------|---------------|--------------------------|---|
| Mode:                  | 802.11a20 VLP | Duty Cycle (%):          | - |
| Data Rate:             | 12 Mbps       | DCCF (dB):               | - |
| Antenna Configuration: | SISO          | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | B (Core 1)    | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 6115                 | -                                                   | -14.64 | - | - |
| 6275                 | -                                                   | -15.63 | - | - |
| 6415                 | -                                                   | -13.98 | - | - |
| 6435                 | -                                                   | -14.97 | - | - |
| 6475                 | -                                                   | -15.31 | - | - |
| 6515                 | -                                                   | -15.98 | - | - |
| 6535                 | -                                                   | -14.42 | - | - |
| 6695                 | -                                                   | -14.35 | - | - |
| 6855                 | -                                                   | -15.10 | - | - |
| 6875                 | -                                                   | -15.45 | - | - |
| 6895                 | -                                                   | -15.50 | - | - |
| 7015                 | -                                                   | -14.55 | - | - |
| 7095                 | -                                                   | -15.72 | - | - |
| 7115                 | -                                                   | -15.27 | - | - |

**Table 993 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration      |               |                          |   |
|------------------------|---------------|--------------------------|---|
| Mode:                  | 802.11a40 VLP | Duty Cycle (%):          | - |
| Data Rate:             | 12 Mbps       | DCCF (dB):               | - |
| Antenna Configuration: | SISO          | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | B (Core 1)    | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 6125                 | -                                                   | -11.23 | - | - |
| 6285                 | -                                                   | -10.93 | - | - |
| 6405                 | -                                                   | -8.44  | - | - |
| 6445                 | -                                                   | -9.86  | - | - |
| 6485                 | -                                                   | -9.41  | - | - |
| 6525                 | -                                                   | -11.09 | - | - |
| 6565                 | -                                                   | -8.17  | - | - |
| 6725                 | -                                                   | -10.34 | - | - |
| 6845                 | -                                                   | -10.71 | - | - |
| 6925                 | -                                                   | -11.97 | - | - |
| 7005                 | -                                                   | -10.17 | - | - |
| 7085                 | -                                                   | -9.77  | - | - |

**Table 994 - Unwanted Emissions Within the Band Results**



| Test Configuration |                              |                 |                     |
|--------------------|------------------------------|-----------------|---------------------|
| Frequency Range:   | 6.875-7.125 GHz              | Band:           | U-NII-8             |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2 | Test Method(s): | KDB 987594 clause j |

| DUT Configuration      |               |                          |   |
|------------------------|---------------|--------------------------|---|
| Mode:                  | 802.11a40 VLP | Duty Cycle (%):          | - |
| Data Rate:             | 24 Mbps       | DCCF (dB):               | - |
| Antenna Configuration: | SISO          | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | B (Core 1)    | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 6885                 | -                                                   | -11.38 | - | - |

**Table 995 - Unwanted Emissions Within the Band Results**

| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration      |               |                          |   |
|------------------------|---------------|--------------------------|---|
| Mode:                  | 802.11a80 VLP | Duty Cycle (%):          | - |
| Data Rate:             | 12 Mbps       | DCCF (dB):               | - |
| Antenna Configuration: | SISO          | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | B (Core 1)    | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 6145                 | -                                                   | -10.36 | - | - |
| 6305                 | -                                                   | -8.49  | - | - |
| 6385                 | -                                                   | -8.42  | - | - |
| 6465                 | -                                                   | -9.29  | - | - |
| 6545                 | -                                                   | -9.99  | - | - |
| 6625                 | -                                                   | -9.33  | - | - |
| 6705                 | -                                                   | -9.24  | - | - |
| 6785                 | -                                                   | -9.16  | - | - |
| 6865                 | -                                                   | -10.00 | - | - |
| 7025                 | -                                                   | -9.14  | - | - |

**Table 996 - Unwanted Emissions Within the Band Results**



| Test Configuration |                              |                 |                     |
|--------------------|------------------------------|-----------------|---------------------|
| Frequency Range:   | 6.875-7.125 GHz              | Band:           | U-NII-8             |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2 | Test Method(s): | KDB 987594 clause j |

| DUT Configuration      |               |                          |   |
|------------------------|---------------|--------------------------|---|
| Mode:                  | 802.11a80 VLP | Duty Cycle (%):          | - |
| Data Rate:             | 24 Mbps       | DCCF (dB):               | - |
| Antenna Configuration: | SISO          | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | B (Core 1)    | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|----------------------|-----------------------------------------------------|-------|---|---|
|                      | A                                                   | B     | C | D |
| 6945                 | -                                                   | -8.79 | - | - |

**Table 997 - Unwanted Emissions Within the Band Results**

| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration      |                |                          |   |
|------------------------|----------------|--------------------------|---|
| Mode:                  | 802.11a160 VLP | Duty Cycle (%):          | - |
| Data Rate:             | 12 Mbps        | DCCF (dB):               | - |
| Antenna Configuration: | SISO           | Peak Antenna Gain (dBi): | - |
| Active Port(s):        | B (Core 1)     | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|----------------------|-----------------------------------------------------|-------|---|---|
|                      | A                                                   | B     | C | D |
| 6185                 | -                                                   | -8.49 | - | - |
| 6345                 | -                                                   | -8.03 | - | - |
| 6505                 | -                                                   | -7.81 | - | - |
| 6665                 | -                                                   | -8.93 | - | - |
| 6825                 | -                                                   | -7.23 | - | - |
| 6985                 | -                                                   | -7.69 | - | - |

**Table 998 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                      |                          |   |
|---------------------------|----------------------|--------------------------|---|
| Mode:                     | 802.11ax HE20 SU VLP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1               | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                 | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)           | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 6115                 | -                                                   | -17.53 | - | - |
| 6275                 | -                                                   | -16.07 | - | - |
| 6415                 | -                                                   | -15.88 | - | - |
| 6435                 | -                                                   | -16.69 | - | - |
| 6475                 | -                                                   | -16.39 | - | - |
| 6515                 | -                                                   | -16.42 | - | - |
| 6535                 | -                                                   | -16.45 | - | - |
| 6695                 | -                                                   | -16.64 | - | - |
| 6855                 | -                                                   | -15.98 | - | - |
| 6875                 | -                                                   | -15.94 | - | - |
| 6895                 | -                                                   | -15.00 | - | - |
| 6995                 | -                                                   | -16.83 | - | - |
| 7095                 | -                                                   | -15.62 | - | - |

**Table 999 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                      |                          |   |
|---------------------------|----------------------|--------------------------|---|
| Mode:                     | 802.11ax HE40 SU VLP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1               | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                 | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)           | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 6125                 | -                                                   | -11.10 | - | - |
| 6285                 | -                                                   | -10.89 | - | - |
| 6405                 | -                                                   | -10.80 | - | - |
| 6445                 | -                                                   | -9.21  | - | - |
| 6485                 | -                                                   | -8.84  | - | - |
| 6525                 | -                                                   | -9.06  | - | - |
| 6565                 | -                                                   | -9.53  | - | - |
| 6725                 | -                                                   | -10.33 | - | - |
| 6845                 | -                                                   | -11.74 | - | - |
| 6885                 | -                                                   | -12.05 | - | - |
| 6925                 | -                                                   | -12.14 | - | - |
| 7005                 | -                                                   | -11.82 | - | - |
| 7085                 | -                                                   | -9.53  | - | - |

**Table 1000 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                      |                          |   |
|---------------------------|----------------------|--------------------------|---|
| Mode:                     | 802.11ax HE80 SU VLP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1               | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                 | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)           | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|----------------------|-----------------------------------------------------|-------|---|---|
|                      | A                                                   | B     | C | D |
| 6145                 | -                                                   | -9.28 | - | - |
| 6305                 | -                                                   | -8.63 | - | - |
| 6385                 | -                                                   | -8.26 | - | - |
| 6465                 | -                                                   | -9.54 | - | - |
| 6545                 | -                                                   | -9.31 | - | - |
| 6625                 | -                                                   | -8.17 | - | - |
| 6705                 | -                                                   | -9.32 | - | - |
| 6785                 | -                                                   | -8.81 | - | - |
| 6865                 | -                                                   | -9.16 | - | - |
| 6945                 | -                                                   | -8.72 | - | - |
| 7025                 | -                                                   | -8.97 | - | - |

**Table 1001 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                       |                          |   |
|---------------------------|-----------------------|--------------------------|---|
| Mode:                     | 802.11ax HE160 SU VLP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                  | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)            | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|----------------------|-----------------------------------------------------|-------|---|---|
|                      | A                                                   | B     | C | D |
| 6185                 | -                                                   | -7.22 | - | - |
| 6345                 | -                                                   | -7.84 | - | - |
| 6505                 | -                                                   | -7.39 | - | - |
| 6665                 | -                                                   | -7.25 | - | - |
| 6825                 | -                                                   | -6.53 | - | - |
| 6985                 | -                                                   | -6.70 | - | - |

**Table 1002 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                        |                          |   |
|---------------------------|------------------------|--------------------------|---|
| Mode:                     | 802.11ax HE20 RU52 VLP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                 | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                   | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)             | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 6115 (RU52.37)       | -                                                   | -12.26 | - | - |
| 6275 (RU52.37)       | -                                                   | -12.06 | - | - |
| 6415 (RU52.40)       | -                                                   | -13.12 | - | - |
| 6435 (RU52.37)       | -                                                   | -13.04 | - | - |
| 6475 (RU52.37)       | -                                                   | -15.21 | - | - |
| 6515 (RU52.40)       | -                                                   | -10.96 | - | - |
| 6535 (RU52.37)       | -                                                   | -13.07 | - | - |
| 6695 (RU52.37)       | -                                                   | -12.73 | - | - |
| 6855 (RU52.40)       | -                                                   | -13.71 | - | - |
| 6875 (RU52.38)       | -                                                   | -17.98 | - | - |
| 6875 (RU52.39)       | -                                                   | -18.26 | - | - |
| 6895 (RU52.37)       | -                                                   | -14.18 | - | - |
| 6995 (RU52.37)       | -                                                   | -13.02 | - | - |
| 7095 (RU52.40)       | -                                                   | -12.90 | - | - |

**Table 1003 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                         |                          |   |
|---------------------------|-------------------------|--------------------------|---|
| Mode:                     | 802.11ax HE20 RU106 VLP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                  | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                    | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)              | Active Chain Id(s):      | 1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 6115 (RU106.53)      | -                                                   | -15.08 | - | - |
| 6275 (RU106.53)      | -                                                   | -13.46 | - | - |
| 6395 (RU106.53)      | -                                                   | -14.57 | - | - |
| 6415 (RU106.54)      | -                                                   | -13.79 | - | - |
| 6435 (RU106.53)      | -                                                   | -14.27 | - | - |
| 6475 (RU106.53)      | -                                                   | -13.28 | - | - |
| 6515 (RU106.54)      | -                                                   | -12.97 | - | - |
| 6535 (RU106.53)      | -                                                   | -15.09 | - | - |
| 6695 (RU106.53)      | -                                                   | -13.73 | - | - |
| 6855 (RU106.54)      | -                                                   | -11.39 | - | - |
| 6875 (RU106.53)      | -                                                   | -12.72 | - | - |
| 6875 (RU106.54)      | -                                                   | -14.00 | - | - |
| 6895 (RU106.53)      | -                                                   | -14.77 | - | - |
| 6995 (RU106.53)      | -                                                   | -14.61 | - | - |
| 7095 (RU106.54)      | -                                                   | -13.93 | - | - |

**Table 1004 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                            |                          |   |
|---------------------------|--------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT20 RU Size 52 + RU Size 26 VLP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                     | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                       | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)                                 | Active Chain Id(s):      | 1 |

| Test Frequency (MHz)              | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|-----------------------------------|-----------------------------------------------------|--------|---|---|
|                                   | A                                                   | B      | C | D |
| 6115 (RU Size 52 + RU Size 26.70) | -                                                   | -16.77 | - | - |
| 6275 (RU Size 52 + RU Size 26.70) | -                                                   | -16.92 | - | - |
| 6395 (RU Size 52 + RU Size 26.70) | -                                                   | -15.36 | - | - |
| 6415 (RU Size 52 + RU Size 26.72) | -                                                   | -16.22 | - | - |
| 6435 (RU Size 52 + RU Size 26.70) | -                                                   | -16.95 | - | - |
| 6475 (RU Size 52 + RU Size 26.70) | -                                                   | -15.40 | - | - |
| 6515 (RU Size 52 + RU Size 26.72) | -                                                   | -17.04 | - | - |
| 6535 (RU Size 52 + RU Size 26.70) | -                                                   | -16.57 | - | - |
| 6695 (RU Size 52 + RU Size 26.70) | -                                                   | -16.90 | - | - |
| 6855 (RU Size 52 + RU Size 26.72) | -                                                   | -14.98 | - | - |
| 6875 (RU Size 52 + RU Size 26.70) | -                                                   | -15.88 | - | - |
| 6875 (RU Size 52 + RU Size 26.72) | -                                                   | -16.19 | - | - |
| 6895 (RU Size 52 + RU Size 26.70) | -                                                   | -15.53 | - | - |
| 6995 (RU Size 52 + RU Size 26.70) | -                                                   | -17.04 | - | - |
| 7095 (RU Size 52 + RU Size 26.72) | -                                                   | -15.72 | - | - |

**Table 1005 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                             |                          |   |
|---------------------------|---------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT20 RU Size 106 + RU Size 26 VLP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                      | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                        | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)                                  | Active Chain Id(s):      | 1 |

| Test Frequency (MHz)               | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|------------------------------------|-----------------------------------------------------|--------|---|---|
|                                    | A                                                   | B      | C | D |
| 6115 (RU Size 106 + RU Size 26.82) | -                                                   | -15.80 | - | - |
| 6275 (RU Size 106 + RU Size 26.82) | -                                                   | -15.48 | - | - |
| 6415 (RU Size 106 + RU Size 26.83) | -                                                   | -12.67 | - | - |
| 6435 (RU Size 106 + RU Size 26.82) | -                                                   | -15.89 | - | - |
| 6475 (RU Size 106 + RU Size 26.82) | -                                                   | -14.96 | - | - |
| 6515 (RU Size 106 + RU Size 26.83) | -                                                   | -13.74 | - | - |
| 6535 (RU Size 106 + RU Size 26.82) | -                                                   | -14.31 | - | - |
| 6695 (RU Size 106 + RU Size 26.82) | -                                                   | -15.34 | - | - |
| 6855 (RU Size 106 + RU Size 26.83) | -                                                   | -14.23 | - | - |
| 6875 (RU Size 106 + RU Size 26.82) | -                                                   | -14.29 | - | - |
| 6875 (RU Size 106 + RU Size 26.83) | -                                                   | -13.20 | - | - |
| 6895 (RU Size 106 + RU Size 26.82) | -                                                   | -14.98 | - | - |
| 6995 (RU Size 106 + RU Size 26.82) | -                                                   | -14.04 | - | - |
| 7095 (RU Size 106 + RU Size 26.83) | -                                                   | -12.74 | - | - |

**Table 1006 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                              |                          |   |
|---------------------------|----------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT80 RU Size 484 + RU Size 242 VLP | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                       | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                         | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)                                   | Active Chain Id(s):      | 1 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|-------------------------------------|-----------------------------------------------------|--------|---|---|
|                                     | A                                                   | B      | C | D |
| 6145 (RU Size 484 + RU Size 242.92) | -                                                   | -10.55 | - | - |
| 6145 (RU Size 484 + RU Size 242.93) | -                                                   | -10.50 | - | - |
| 6305 (RU Size 484 + RU Size 242.92) | -                                                   | -8.92  | - | - |
| 6385 (RU Size 484 + RU Size 242.90) | -                                                   | -10.01 | - | - |
| 6465 (RU Size 484 + RU Size 242.93) | -                                                   | -9.43  | - | - |
| 6545 (RU Size 484 + RU Size 242.90) | -                                                   | -9.67  | - | - |
| 6545 (RU Size 484 + RU Size 242.93) | -                                                   | -8.10  | - | - |
| 6625 (RU Size 484 + RU Size 242.93) | -                                                   | -7.99  | - | - |
| 6705 (RU Size 484 + RU Size 242.91) | -                                                   | -9.17  | - | - |
| 6785 (RU Size 484 + RU Size 242.90) | -                                                   | -10.00 | - | - |
| 6865 (RU Size 484 + RU Size 242.90) | -                                                   | -9.50  | - | - |
| 6865 (RU Size 484 + RU Size 242.93) | -                                                   | -8.93  | - | - |
| 6945 (RU Size 484 + RU Size 242.93) | -                                                   | -8.78  | - | - |
| 7025 (RU Size 484 + RU Size 242.90) | -                                                   | -9.40  | - | - |

**Table 1007 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                                         |                          |   |
|---------------------------|---------------------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 VLP (Primary) | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                                  | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                                    | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)                                              | Active Chain Id(s):      | 1 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|-------------------------------------|-----------------------------------------------------|-------|---|---|
|                                     | A                                                   | B     | C | D |
| 6185 (RU Size 996 + RU Size 484.95) | -                                                   | -7.74 | - | - |
| 6345 (RU Size 996 + RU Size 484.94) | -                                                   | -8.24 | - | - |
| 6505 (RU Size 996 + RU Size 484.94) | -                                                   | -7.43 | - | - |
| 6665 (RU Size 996 + RU Size 484.94) | -                                                   | -7.36 | - | - |
| 6825 (RU Size 996 + RU Size 484.94) | -                                                   | -6.38 | - | - |
| 6985 (RU Size 996 + RU Size 484.94) | -                                                   | -7.12 | - | - |

**Table 1008 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                                           |                          |   |
|---------------------------|-----------------------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 VLP (Secondary) | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                                    | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                                      | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)                                                | Active Chain Id(s):      | 1 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|-------------------------------------|-----------------------------------------------------|-------|---|---|
|                                     | A                                                   | B     | C | D |
| 6185 (RU Size 996 + RU Size 484.94) | -                                                   | -7.80 | - | - |
| 6505 (RU Size 996 + RU Size 484.95) | -                                                   | -6.79 | - | - |
| 6665 (RU Size 996 + RU Size 484.95) | -                                                   | -7.64 | - | - |
| 6825 (RU Size 996 + RU Size 484.95) | -                                                   | -6.87 | - | - |
| 6985 (RU Size 996 + RU Size 484.95) | -                                                   | -6.97 | - | - |

**Table 1009 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                                                       |                          |   |
|---------------------------|-----------------------------------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 VLP (Primary) | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                                                | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                                                  | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)                                                            | Active Chain Id(s):      | 1 |

| Test Frequency (MHz)                              | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|---------------------------------------------------|-----------------------------------------------------|-------|---|---|
|                                                   | A                                                   | B     | C | D |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.97) | -                                                   | -7.13 | - | - |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.98) | -                                                   | -7.51 | - | - |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.99) | -                                                   | -8.16 | - | - |
| 6345 (RU Size 996 + RU Size 484 + RU Size 242.96) | -                                                   | -8.19 | - | - |
| 6505 (RU Size 996 + RU Size 484 + RU Size 242.96) | -                                                   | -6.96 | - | - |
| 6665 (RU Size 996 + RU Size 484 + RU Size 242.96) | -                                                   | -7.29 | - | - |
| 6825 (RU Size 996 + RU Size 484 + RU Size 242.96) | -                                                   | -6.70 | - | - |
| 6985 (RU Size 996 + RU Size 484 + RU Size 242.96) | -                                                   | -6.46 | - | - |

**Table 1010 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                                                         |                          |   |
|---------------------------|-------------------------------------------------------------------------|--------------------------|---|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 VLP (Secondary) | Duty Cycle (%):          | - |
| Modulation Coding Scheme: | MCS2x1                                                                  | DCCF (dB):               | - |
| Antenna Configuration:    | SISO                                                                    | Peak Antenna Gain (dBi): | - |
| Active Port(s):           | B (Core 1)                                                              | Active Chain Id(s):      | 1 |

| Test Frequency (MHz)                              | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|---------------------------------------------------|-----------------------------------------------------|-------|---|---|
|                                                   | A                                                   | B     | C | D |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.99) | -                                                   | -8.06 | - | - |
| 6505 (RU Size 996 + RU Size 484 + RU Size 242.99) | -                                                   | -6.99 | - | - |
| 6665 (RU Size 996 + RU Size 484 + RU Size 242.99) | -                                                   | -7.38 | - | - |
| 6825 (RU Size 996 + RU Size 484 + RU Size 242.99) | -                                                   | -7.09 | - | - |
| 6985 (RU Size 996 + RU Size 484 + RU Size 242.99) | -                                                   | -6.65 | - | - |

**Table 1011 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration      |                       |                          |     |
|------------------------|-----------------------|--------------------------|-----|
| Mode:                  | 802.11a20 LPI         | Duty Cycle (%):          | -   |
| Data Rate:             | 12 Mbps               | DCCF (dB):               | -   |
| Antenna Configuration: | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):        | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5955                 | -13.46                                              | -15.66 | - | - |
| 6195                 | -15.39                                              | -16.31 | - | - |
| 6415                 | -14.30                                              | -16.10 | - | - |
| 6435                 | -15.38                                              | -15.66 | - | - |
| 6475                 | -15.45                                              | -15.25 | - | - |
| 6515                 | -14.99                                              | -14.78 | - | - |
| 6535                 | -14.42                                              | -14.70 | - | - |
| 6695                 | -14.13                                              | -15.67 | - | - |
| 6855                 | -15.14                                              | -14.80 | - | - |
| 6875                 | -15.06                                              | -15.87 | - | - |
| 6895                 | -14.40                                              | -15.49 | - | - |
| 7015                 | -14.31                                              | -15.83 | - | - |
| 7095                 | -14.56                                              | -14.05 | - | - |
| 7115                 | -15.67                                              | -15.73 | - | - |

**Table 1012 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration      |                       |                          |     |
|------------------------|-----------------------|--------------------------|-----|
| Mode:                  | 802.11a40 LPI         | Duty Cycle (%):          | -   |
| Data Rate:             | 12 Mbps               | DCCF (dB):               | -   |
| Antenna Configuration: | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):        | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5965                 | -8.99                                               | -10.70 | - | - |
| 6205                 | -10.40                                              | -10.16 | - | - |
| 6405                 | -8.73                                               | -9.01  | - | - |
| 6445                 | -9.22                                               | -10.10 | - | - |
| 6485                 | -9.41                                               | -9.50  | - | - |
| 6525                 | -8.78                                               | -9.01  | - | - |
| 6565                 | -8.85                                               | -9.33  | - | - |
| 6725                 | -9.63                                               | -10.93 | - | - |
| 6845                 | -11.22                                              | -10.51 | - | - |
| 6885                 | -11.43                                              | -10.80 | - | - |
| 6925                 | -11.96                                              | -11.01 | - | - |
| 7005                 | -11.25                                              | -10.96 | - | - |
| 7085                 | -9.60                                               | -10.71 | - | - |

**Table 1013 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration      |                       |                          |     |
|------------------------|-----------------------|--------------------------|-----|
| Mode:                  | 802.11a80 LPI         | Duty Cycle (%):          | -   |
| Data Rate:             | 12 Mbps               | DCCF (dB):               | -   |
| Antenna Configuration: | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):        | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5985                 | -11.11                                              | -10.73 | - | - |
| 6225                 | -9.48                                               | -9.78  | - | - |
| 6385                 | -8.14                                               | -10.17 | - | - |
| 6465                 | -9.87                                               | -8.78  | - | - |
| 6545                 | -9.72                                               | -8.43  | - | - |
| 6625                 | -9.04                                               | -8.93  | - | - |
| 6705                 | -9.47                                               | -9.49  | - | - |
| 6785                 | -10.11                                              | -8.76  | - | - |
| 6865                 | -10.12                                              | -9.70  | - | - |
| 6945                 | -9.57                                               | -8.90  | - | - |
| 7025                 | -9.15                                               | -9.86  | - | - |

**Table 1014 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration      |                       |                          |     |
|------------------------|-----------------------|--------------------------|-----|
| Mode:                  | 802.11a160 LPI        | Duty Cycle (%):          | -   |
| Data Rate:             | 12 Mbps               | DCCF (dB):               | -   |
| Antenna Configuration: | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):        | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|----------------------|-----------------------------------------------------|-------|---|---|
|                      | A                                                   | B     | C | D |
| 6025                 | -7.82                                               | -9.60 | - | - |
| 6185                 | -8.18                                               | -7.80 | - | - |
| 6345                 | -8.27                                               | -7.79 | - | - |
| 6505                 | -7.50                                               | -7.22 | - | - |
| 6665                 | -8.14                                               | -8.03 | - | - |
| 6825                 | -7.84                                               | -6.98 | - | - |
| 6985                 | -7.99                                               | -7.40 | - | - |

**Table 1015 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                       |                          |     |
|---------------------------|-----------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE20 SU LPI  | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5955                 | -16.54                                              | -17.13 | - | - |
| 6195                 | -16.04                                              | -16.33 | - | - |
| 6415                 | -15.67                                              | -15.84 | - | - |
| 6435                 | -15.38                                              | -15.96 | - | - |
| 6475                 | -15.42                                              | -15.69 | - | - |
| 6515                 | -15.22                                              | -15.72 | - | - |
| 6535                 | -15.08                                              | -15.55 | - | - |
| 6695                 | -15.58                                              | -16.29 | - | - |
| 6855                 | -15.75                                              | -16.17 | - | - |
| 6875                 | -15.61                                              | -16.11 | - | - |
| 6895                 | -15.11                                              | -15.40 | - | - |
| 6995                 | -14.91                                              | -15.12 | - | - |
| 7095                 | -15.58                                              | -15.97 | - | - |

**Table 1016 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                       |                          |     |
|---------------------------|-----------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE40 SU LPI  | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5965                 | -10.53                                              | -10.60 | - | - |
| 6205                 | -10.82                                              | -10.56 | - | - |
| 6405                 | -9.26                                               | -9.40  | - | - |
| 6445                 | -9.50                                               | -9.96  | - | - |
| 6485                 | -9.39                                               | -7.88  | - | - |
| 6525                 | -9.16                                               | -9.02  | - | - |
| 6565                 | -8.83                                               | -9.03  | - | - |
| 6725                 | -9.81                                               | -9.58  | - | - |
| 6845                 | -11.61                                              | -10.88 | - | - |
| 6885                 | -11.35                                              | -11.99 | - | - |
| 6925                 | -12.13                                              | -11.00 | - | - |
| 7005                 | -11.49                                              | -10.05 | - | - |
| 7085                 | -11.46                                              | -10.91 | - | - |

**Table 1017 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                       |                          |     |
|---------------------------|-----------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE80 SU LPI  | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5985                 | -10.30                                              | -10.26 | - | - |
| 6225                 | -7.96                                               | -9.47  | - | - |
| 6385                 | -8.16                                               | -8.94  | - | - |
| 6465                 | -9.30                                               | -8.36  | - | - |
| 6545                 | -8.99                                               | -7.68  | - | - |
| 6625                 | -7.70                                               | -9.32  | - | - |
| 6705                 | -9.21                                               | -9.23  | - | - |
| 6785                 | -9.57                                               | -9.06  | - | - |
| 6865                 | -10.71                                              | -10.18 | - | - |
| 6945                 | -9.18                                               | -8.45  | - | - |
| 7025                 | -8.25                                               | -7.13  | - | - |

**Table 1018 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                       |                          |     |
|---------------------------|-----------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE160 SU LPI | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|----------------------|-----------------------------------------------------|-------|---|---|
|                      | A                                                   | B     | C | D |
| 6025                 | -7.71                                               | -7.90 | - | - |
| 6185                 | -8.77                                               | -8.22 | - | - |
| 6345                 | -7.11                                               | -7.72 | - | - |
| 6505                 | -5.57                                               | -6.26 | - | - |
| 6665                 | -6.87                                               | -6.80 | - | - |
| 6825                 | -7.34                                               | -6.07 | - | - |
| 6985                 | -7.10                                               | -6.51 | - | - |

**Table 1019 - Unwanted Emissions Within the Band Results**

| Test Configuration |                              |                 |                     |
|--------------------|------------------------------|-----------------|---------------------|
| Frequency Range:   | 6.425-6.525 GHz              | Band:           | U-NII-6             |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2 | Test Method(s): | KDB 987594 clause j |

| DUT Configuration         |                        |                          |     |
|---------------------------|------------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE20 RU52 LPI | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                 | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD               | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)  | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 6435 (RU52.37)       | -12.71                                              | -13.31 | - | - |
| 6475 (RU52.37)       | -12.03                                              | -12.64 | - | - |
| 6515 (RU52.40)       | -12.94                                              | -12.24 | - | - |

**Table 1020 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                         |                          |     |
|---------------------------|-------------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE20 RU106 LPI | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                  | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)   | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5955 (RU106.53)      | -14.76                                              | -14.06 | - | - |
| 6195 (RU106.53)      | -14.25                                              | -13.93 | - | - |
| 6415 (RU106.54)      | -13.89                                              | -12.86 | - | - |
| 6435 (RU106.53)      | -14.58                                              | -13.16 | - | - |
| 6475 (RU106.53)      | -12.48                                              | -12.98 | - | - |
| 6515 (RU106.54)      | -13.87                                              | -12.44 | - | - |
| 6535 (RU106.53)      | -12.70                                              | -13.53 | - | - |
| 6695 (RU106.53)      | -12.66                                              | -14.02 | - | - |
| 6855 (RU106.54)      | -13.54                                              | -13.25 | - | - |
| 6875 (RU106.53)      | -14.29                                              | -12.57 | - | - |
| 6875 (RU106.54)      | -14.24                                              | -14.40 | - | - |
| 6895 (RU106.53)      | -14.56                                              | -14.37 | - | - |
| 6995 (RU106.53)      | -13.85                                              | -12.84 | - | - |
| 7095 (RU106.54)      | -14.16                                              | -13.40 | - | - |

**Table 1021 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                            |                          |     |
|---------------------------|--------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT20 RU Size 52 + RU Size 26 LPI | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                     | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                   | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                      | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)              | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|-----------------------------------|-----------------------------------------------------|--------|---|---|
|                                   | A                                                   | B      | C | D |
| 5955 (RU Size 52 + RU Size 26.70) | -17.31                                              | -14.82 | - | - |
| 6195 (RU Size 52 + RU Size 26.70) | -17.15                                              | -15.37 | - | - |
| 6415 (RU Size 52 + RU Size 26.72) | -16.02                                              | -15.64 | - | - |
| 6435 (RU Size 52 + RU Size 26.70) | -16.40                                              | -16.15 | - | - |
| 6475 (RU Size 52 + RU Size 26.70) | -16.90                                              | -15.83 | - | - |
| 6515 (RU Size 52 + RU Size 26.72) | -15.73                                              | -17.68 | - | - |
| 6535 (RU Size 52 + RU Size 26.70) | -16.09                                              | -16.20 | - | - |
| 6695 (RU Size 52 + RU Size 26.70) | -17.57                                              | -15.53 | - | - |
| 6855 (RU Size 52 + RU Size 26.72) | -15.20                                              | -15.99 | - | - |
| 6875 (RU Size 52 + RU Size 26.70) | -15.70                                              | -16.25 | - | - |
| 6875 (RU Size 52 + RU Size 26.72) | -16.48                                              | -15.95 | - | - |
| 6895 (RU Size 52 + RU Size 26.70) | -15.99                                              | -16.74 | - | - |
| 6995 (RU Size 52 + RU Size 26.70) | -14.95                                              | -15.79 | - | - |
| 7095 (RU Size 52 + RU Size 26.72) | -16.32                                              | -15.32 | - | - |

**Table 1022 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                             |                          |     |
|---------------------------|---------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT20 RU Size 106 + RU Size 26 LPI | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                      | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                    | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                       | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)               | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|------------------------------------|-----------------------------------------------------|--------|---|---|
|                                    | A                                                   | B      | C | D |
| 5955 (RU Size 106 + RU Size 26.82) | -15.11                                              | -14.91 | - | - |
| 6195 (RU Size 106 + RU Size 26.82) | -14.75                                              | -12.71 | - | - |
| 6415 (RU Size 106 + RU Size 26.83) | -14.15                                              | -12.28 | - | - |
| 6435 (RU Size 106 + RU Size 26.82) | -15.41                                              | -13.76 | - | - |
| 6475 (RU Size 106 + RU Size 26.82) | -15.19                                              | -13.21 | - | - |
| 6515 (RU Size 106 + RU Size 26.83) | -13.31                                              | -11.46 | - | - |
| 6535 (RU Size 106 + RU Size 26.82) | -15.45                                              | -14.74 | - | - |
| 6695 (RU Size 106 + RU Size 26.82) | -14.97                                              | -12.53 | - | - |
| 6855 (RU Size 106 + RU Size 26.83) | -14.16                                              | -12.42 | - | - |
| 6875 (RU Size 106 + RU Size 26.82) | -14.37                                              | -13.12 | - | - |
| 6875 (RU Size 106 + RU Size 26.83) | -13.04                                              | -12.05 | - | - |
| 6895 (RU Size 106 + RU Size 26.82) | -16.36                                              | -11.70 | - | - |
| 6995 (RU Size 106 + RU Size 26.82) | -14.95                                              | -13.86 | - | - |
| 7095 (RU Size 106 + RU Size 26.83) | -13.32                                              | -12.91 | - | - |

**Table 1023 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                              |                          |     |
|---------------------------|----------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT80 RU Size 484 + RU Size 242 LPI | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                       | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                     | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                        | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|-------------------------------------|-----------------------------------------------------|--------|---|---|
|                                     | A                                                   | B      | C | D |
| 5985 (RU Size 484 + RU Size 242.93) | -9.29                                               | -8.79  | - | - |
| 6225 (RU Size 484 + RU Size 242.92) | -10.46                                              | -10.22 | - | - |
| 6385 (RU Size 484 + RU Size 242.90) | -9.05                                               | -8.65  | - | - |
| 6465 (RU Size 484 + RU Size 242.93) | -9.13                                               | -9.60  | - | - |
| 6545 (RU Size 484 + RU Size 242.90) | -8.97                                               | -9.29  | - | - |
| 6545 (RU Size 484 + RU Size 242.93) | -9.14                                               | -9.22  | - | - |
| 6625 (RU Size 484 + RU Size 242.93) | -9.27                                               | -9.60  | - | - |
| 6705 (RU Size 484 + RU Size 242.91) | -9.17                                               | -10.31 | - | - |
| 6785 (RU Size 484 + RU Size 242.90) | -10.97                                              | -8.74  | - | - |
| 6865 (RU Size 484 + RU Size 242.90) | -11.13                                              | -10.24 | - | - |
| 6865 (RU Size 484 + RU Size 242.93) | -10.86                                              | -9.66  | - | - |
| 6945 (RU Size 484 + RU Size 242.93) | -9.53                                               | -8.85  | - | - |
| 7025 (RU Size 484 + RU Size 242.90) | -9.54                                               | -10.85 | - | - |

**Table 1024 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                                         |                          |     |
|---------------------------|---------------------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 LPI (Primary) | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                                  | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                                | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                                   | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|-------------------------------------|-----------------------------------------------------|-------|---|---|
|                                     | A                                                   | B     | C | D |
| 6185 (RU Size 996 + RU Size 484.95) | -8.17                                               | -7.70 | - | - |
| 6345 (RU Size 996 + RU Size 484.94) | -7.23                                               | -7.94 | - | - |
| 6505 (RU Size 996 + RU Size 484.94) | -5.37                                               | -8.00 | - | - |
| 6665 (RU Size 996 + RU Size 484.94) | -6.58                                               | -8.17 | - | - |
| 6825 (RU Size 996 + RU Size 484.94) | -8.07                                               | -7.95 | - | - |
| 6985 (RU Size 996 + RU Size 484.94) | -7.42                                               | -6.44 | - | - |

**Table 1025 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                                           |                          |     |
|---------------------------|-----------------------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 LPI (Secondary) | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                                    | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                                  | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                                     | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|-------------------------------------|-----------------------------------------------------|-------|---|---|
|                                     | A                                                   | B     | C | D |
| 6025 (RU Size 996 + RU Size 484.95) | -7.62                                               | -7.46 | - | - |
| 6185 (RU Size 996 + RU Size 484.94) | -8.71                                               | -8.05 | - | - |
| 6505 (RU Size 996 + RU Size 484.95) | -7.70                                               | -7.43 | - | - |
| 6665 (RU Size 996 + RU Size 484.95) | -7.92                                               | -6.37 | - | - |
| 6825 (RU Size 996 + RU Size 484.95) | -7.58                                               | -7.32 | - | - |
| 6985 (RU Size 996 + RU Size 484.95) | -7.07                                               | -6.54 | - | - |

**Table 1026 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                                                       |                          |     |
|---------------------------|-----------------------------------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 LPI (Primary) | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                                                | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                                              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                                                 | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)                              | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|---------------------------------------------------|-----------------------------------------------------|-------|---|---|
|                                                   | A                                                   | B     | C | D |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.97) | -8.41                                               | -8.16 | - | - |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.98) | -8.18                                               | -7.65 | - | - |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.99) | -8.20                                               | -7.55 | - | - |
| 6345 (RU Size 996 + RU Size 484 + RU Size 242.96) | -8.69                                               | -7.94 | - | - |
| 6505 (RU Size 996 + RU Size 484 + RU Size 242.96) | -5.45                                               | -7.40 | - | - |
| 6665 (RU Size 996 + RU Size 484 + RU Size 242.96) | -6.46                                               | -6.81 | - | - |
| 6825 (RU Size 996 + RU Size 484 + RU Size 242.96) | -6.86                                               | -6.53 | - | - |
| 6985 (RU Size 996 + RU Size 484 + RU Size 242.96) | -6.95                                               | -6.69 | - | - |

**Table 1027 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                                                         |                          |     |
|---------------------------|-------------------------------------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 LPI (Secondary) | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                                                  | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                                                | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                                                   | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)                              | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|---------------------------------------------------|-----------------------------------------------------|-------|---|---|
|                                                   | A                                                   | B     | C | D |
| 6025 (RU Size 996 + RU Size 484 + RU Size 242.99) | -7.45                                               | -7.51 | - | - |
| 6505 (RU Size 996 + RU Size 484 + RU Size 242.99) | -7.64                                               | -7.60 | - | - |
| 6665 (RU Size 996 + RU Size 484 + RU Size 242.99) | -6.56                                               | -7.43 | - | - |
| 6825 (RU Size 996 + RU Size 484 + RU Size 242.99) | -6.51                                               | -5.93 | - | - |
| 6985 (RU Size 996 + RU Size 484 + RU Size 242.99) | -7.51                                               | -6.71 | - | - |

**Table 1028 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration      |                       |                          |     |
|------------------------|-----------------------|--------------------------|-----|
| Mode:                  | 802.11a20 SP          | Duty Cycle (%):          | -   |
| Data Rate:             | 12 Mbps               | DCCF (dB):               | -   |
| Antenna Configuration: | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):        | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5955                 | -14.69                                              | -15.70 | - | - |
| 6195                 | -15.89                                              | -15.60 | - | - |
| 6415                 | -15.18                                              | -15.38 | - | - |
| 6435                 | -15.53                                              | -15.70 | - | - |
| 6475                 | -14.88                                              | -15.72 | - | - |
| 6515                 | -16.31                                              | -15.10 | - | - |
| 6535                 | -14.81                                              | -14.95 | - | - |
| 6695                 | -14.38                                              | -15.78 | - | - |
| 6855                 | -15.13                                              | -15.71 | - | - |

**Table 1029 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration      |                       |                          |     |
|------------------------|-----------------------|--------------------------|-----|
| Mode:                  | 802.11a40 SP          | Duty Cycle (%):          | -   |
| Data Rate:             | 12 Mbps               | DCCF (dB):               | -   |
| Antenna Configuration: | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):        | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5965                 | -11.65                                              | -10.16 | - | - |
| 6205                 | -10.59                                              | -10.50 | - | - |
| 6405                 | -9.32                                               | -10.52 | - | - |
| 6445                 | -9.93                                               | -9.80  | - | - |
| 6485                 | -9.92                                               | -9.64  | - | - |
| 6525                 | -9.77                                               | -11.19 | - | - |
| 6565                 | -9.63                                               | -9.57  | - | - |
| 6725                 | -9.59                                               | -11.62 | - | - |
| 6845                 | -11.42                                              | -11.56 | - | - |

**Table 1030 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration      |                       |                          |     |
|------------------------|-----------------------|--------------------------|-----|
| Mode:                  | 802.11a80 SP          | Duty Cycle (%):          | -   |
| Data Rate:             | 12 Mbps               | DCCF (dB):               | -   |
| Antenna Configuration: | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):        | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5985                 | -10.79                                              | -10.82 | - | - |
| 6225                 | -10.05                                              | -9.86  | - | - |
| 6385                 | -10.66                                              | -10.10 | - | - |
| 6465                 | -9.66                                               | -10.67 | - | - |
| 6545                 | -9.40                                               | -10.37 | - | - |
| 6625                 | -10.21                                              | -10.31 | - | - |
| 6705                 | -10.18                                              | -10.23 | - | - |
| 6785                 | -10.01                                              | -8.86  | - | - |

**Table 1031 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration      |                       |                          |     |
|------------------------|-----------------------|--------------------------|-----|
| Mode:                  | 802.11a160 SP         | Duty Cycle (%):          | -   |
| Data Rate:             | 12 Mbps               | DCCF (dB):               | -   |
| Antenna Configuration: | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):        | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|----------------------|-----------------------------------------------------|-------|---|---|
|                      | A                                                   | B     | C | D |
| 6025                 | -9.67                                               | -9.71 | - | - |
| 6185                 | -5.75                                               | -7.21 | - | - |
| 6345                 | -5.98                                               | -5.68 | - | - |
| 6505                 | -6.24                                               | -6.50 | - | - |
| 6665                 | -6.84                                               | -6.57 | - | - |

**Table 1032 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                       |                          |     |
|---------------------------|-----------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE20 SU SP   | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5955                 | -18.33                                              | -17.98 | - | - |
| 6195                 | -16.84                                              | -17.93 | - | - |
| 6415                 | -17.02                                              | -17.18 | - | - |
| 6435                 | -17.29                                              | -17.54 | - | - |
| 6475                 | -15.89                                              | -17.62 | - | - |
| 6515                 | -17.03                                              | -16.67 | - | - |
| 6535                 | -16.69                                              | -16.99 | - | - |
| 6695                 | -16.53                                              | -18.37 | - | - |
| 6855                 | -17.15                                              | -16.60 | - | - |

**Table 1033 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                       |                          |     |
|---------------------------|-----------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE40 SU SP   | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5965                 | -11.19                                              | -9.65  | - | - |
| 6205                 | -11.11                                              | -11.00 | - | - |
| 6405                 | -9.59                                               | -9.77  | - | - |
| 6445                 | -10.29                                              | -9.87  | - | - |
| 6485                 | -10.25                                              | -9.80  | - | - |
| 6525                 | -9.97                                               | -9.60  | - | - |
| 6565                 | -9.90                                               | -9.62  | - | - |
| 6725                 | -10.42                                              | -12.04 | - | - |
| 6845                 | -11.79                                              | -11.52 | - | - |

**Table 1034 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                    |                 |                     |
|--------------------|------------------------------------|-----------------|---------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-7  |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2       | Test Method(s): | KDB 987594 clause j |

| DUT Configuration         |                       |                          |     |
|---------------------------|-----------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE80 SU SP   | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|----------------------|-----------------------------------------------------|-------|---|---|
|                      | A                                                   | B     | C | D |
| 5985                 | -10.20                                              | -9.91 | - | - |
| 6225                 | -10.98                                              | -8.74 | - | - |
| 6385                 | -9.70                                               | -9.03 | - | - |
| 6625                 | -8.19                                               | -9.60 | - | - |
| 6705                 | -9.71                                               | -8.03 | - | - |
| 6785                 | -9.45                                               | -9.28 | - | - |

**Table 1035 - Unwanted Emissions Within the Band Results**

| Test Configuration |                                    |                 |                     |
|--------------------|------------------------------------|-----------------|---------------------|
| Frequency Range:   | 6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-6<br>U-NII-7  |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2       | Test Method(s): | KDB 987594 clause j |

| DUT Configuration         |                       |                          |     |
|---------------------------|-----------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE80 SU SP   | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|----------------------|-----------------------------------------------------|-------|---|---|
|                      | A                                                   | B     | C | D |
| 6465                 | -9.28                                               | -9.56 | - | - |
| 6545                 | -9.37                                               | -9.08 | - | - |

**Table 1036 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                    |                 |                     |
|--------------------|------------------------------------|-----------------|---------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-7  |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2       | Test Method(s): | KDB 987594 clause j |

| DUT Configuration         |                       |                          |     |
|---------------------------|-----------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE160 SU SP  | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|----------------------|-----------------------------------------------------|-------|---|---|
|                      | A                                                   | B     | C | D |
| 6025                 | -9.08                                               | -9.48 | - | - |
| 6185                 | -8.64                                               | -8.39 | - | - |
| 6345                 | -7.82                                               | -8.42 | - | - |
| 6665                 | -8.00                                               | -7.53 | - | - |

**Table 1037 - Unwanted Emissions Within the Band Results**

| Test Configuration |                              |                 |                     |
|--------------------|------------------------------|-----------------|---------------------|
| Frequency Range:   | 6.425-6.525 GHz              | Band:           | U-NII-6             |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2 | Test Method(s): | KDB 987594 clause j |

| DUT Configuration         |                       |                          |     |
|---------------------------|-----------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE160 SU SP  | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|----------------------|-----------------------------------------------------|-------|---|---|
|                      | A                                                   | B     | C | D |
| 6505                 | -8.25                                               | -7.39 | - | - |

**Table 1038 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                       |                          |     |
|---------------------------|-----------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE20 RU26 SP | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5955 (RU26.0)        | -14.81                                              | -15.07 | - | - |
| 6195 (RU26.0)        | -12.94                                              | -12.15 | - | - |
| 6415 (RU26.8)        | -12.27                                              | -12.59 | - | - |
| 6435 (RU26.0)        | -12.46                                              | -13.11 | - | - |
| 6475 (RU26.0)        | -12.79                                              | -13.47 | - | - |
| 6515 (RU26.8)        | -12.61                                              | -13.79 | - | - |
| 6535 (RU26.0)        | -13.69                                              | -14.06 | - | - |
| 6695 (RU26.0)        | -14.06                                              | -13.72 | - | - |
| 6855 (RU26.8)        | -12.65                                              | -12.95 | - | - |

**Table 1039 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                       |                          |     |
|---------------------------|-----------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE20 RU52 SP | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5955 (RU52.37)       | -13.82                                              | -14.84 | - | - |
| 6195 (RU52.37)       | -13.52                                              | -13.79 | - | - |
| 6415 (RU52.40)       | -13.47                                              | -13.34 | - | - |
| 6435 (RU52.37)       | -12.01                                              | -13.06 | - | - |
| 6475 (RU52.37)       | -13.38                                              | -11.34 | - | - |
| 6515 (RU52.40)       | -12.42                                              | -12.61 | - | - |
| 6535 (RU52.37)       | -12.89                                              | -12.97 | - | - |
| 6695 (RU52.37)       | -12.40                                              | -12.40 | - | - |
| 6855 (RU52.40)       | -13.82                                              | -12.69 | - | - |

**Table 1040 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                        |                          |     |
|---------------------------|------------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE20 RU106 SP | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                 | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD               | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)  | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5955 (RU106.53)      | -15.61                                              | -14.91 | - | - |
| 6195 (RU106.53)      | -12.85                                              | -13.01 | - | - |
| 6415 (RU106.54)      | -14.65                                              | -13.87 | - | - |
| 6435 (RU106.53)      | -15.69                                              | -13.10 | - | - |
| 6475 (RU106.53)      | -14.29                                              | -13.74 | - | - |
| 6515 (RU106.54)      | -14.33                                              | -13.83 | - | - |
| 6535 (RU106.53)      | -13.66                                              | -13.17 | - | - |
| 6695 (RU106.53)      | -14.57                                              | -14.56 | - | - |
| 6855 (RU106.54)      | -15.01                                              | -14.60 | - | - |

**Table 1041 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                                           |                          |     |
|---------------------------|-------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT20 RU Size 52 + RU Size 26 SP | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                    | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                  | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                     | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)              | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|-----------------------------------|-----------------------------------------------------|--------|---|---|
|                                   | A                                                   | B      | C | D |
| 5955 (RU Size 52 + RU Size 26.70) | -18.15                                              | -18.32 | - | - |
| 6195 (RU Size 52 + RU Size 26.70) | -17.14                                              | -15.45 | - | - |
| 6415 (RU Size 52 + RU Size 26.72) | -15.23                                              | -15.92 | - | - |
| 6435 (RU Size 52 + RU Size 26.70) | -16.89                                              | -16.00 | - | - |
| 6475 (RU Size 52 + RU Size 26.70) | -16.70                                              | -16.10 | - | - |
| 6515 (RU Size 52 + RU Size 26.72) | -15.68                                              | -15.67 | - | - |
| 6535 (RU Size 52 + RU Size 26.70) | -17.49                                              | -16.45 | - | - |
| 6695 (RU Size 52 + RU Size 26.70) | -16.48                                              | -15.36 | - | - |
| 6855 (RU Size 52 + RU Size 26.72) | -15.46                                              | -16.33 | - | - |

**Table 1042 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                                            |                          |     |
|---------------------------|--------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT20 RU Size 106 + RU Size 26 SP | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                     | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                   | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                      | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)               | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|------------------------------------|-----------------------------------------------------|--------|---|---|
|                                    | A                                                   | B      | C | D |
| 5955 (RU Size 106 + RU Size 26.82) | -14.86                                              | -15.25 | - | - |
| 6195 (RU Size 106 + RU Size 26.82) | -15.04                                              | -12.58 | - | - |
| 6415 (RU Size 106 + RU Size 26.83) | -13.83                                              | -13.38 | - | - |
| 6435 (RU Size 106 + RU Size 26.82) | -14.47                                              | -12.10 | - | - |
| 6475 (RU Size 106 + RU Size 26.82) | -15.98                                              | -13.72 | - | - |
| 6515 (RU Size 106 + RU Size 26.83) | -13.37                                              | -12.20 | - | - |
| 6535 (RU Size 106 + RU Size 26.82) | -14.02                                              | -12.24 | - | - |
| 6695 (RU Size 106 + RU Size 26.82) | -14.83                                              | -12.96 | - | - |
| 6855 (RU Size 106 + RU Size 26.83) | -11.85                                              | -12.73 | - | - |

**Table 1043 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                    |                 |                     |
|--------------------|------------------------------------|-----------------|---------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-7  |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2       | Test Method(s): | KDB 987594 clause j |

| DUT Configuration         |                                             |                          |     |
|---------------------------|---------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT80 RU Size 484 + RU Size 242 SP | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                      | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                    | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                       | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|-------------------------------------|-----------------------------------------------------|--------|---|---|
|                                     | A                                                   | B      | C | D |
| 5985 (RU Size 484 + RU Size 242.93) | -10.99                                              | -11.05 | - | - |
| 6225 (RU Size 484 + RU Size 242.92) | -9.17                                               | -8.19  | - | - |
| 6385 (RU Size 484 + RU Size 242.90) | -8.81                                               | -10.54 | - | - |
| 6625 (RU Size 484 + RU Size 242.93) | -9.37                                               | -9.34  | - | - |
| 6705 (RU Size 484 + RU Size 242.91) | -8.79                                               | -8.22  | - | - |
| 6785 (RU Size 484 + RU Size 242.90) | -9.48                                               | -9.26  | - | - |

**Table 1044 - Unwanted Emissions Within the Band Results**

| Test Configuration |                                    |                 |                     |
|--------------------|------------------------------------|-----------------|---------------------|
| Frequency Range:   | 6.425-6.525 GHz<br>6.525-6.875 GHz | Band:           | U-NII-6<br>U-NII-7  |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2       | Test Method(s): | KDB 987594 clause j |

| DUT Configuration         |                                             |                          |     |
|---------------------------|---------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT80 RU Size 484 + RU Size 242 SP | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                      | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                    | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                       | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|-------------------------------------|-----------------------------------------------------|--------|---|---|
|                                     | A                                                   | B      | C | D |
| 6465 (RU Size 484 + RU Size 242.93) | -10.64                                              | -10.65 | - | - |
| 6545 (RU Size 484 + RU Size 242.90) | -10.67                                              | -8.81  | - | - |
| 6545 (RU Size 484 + RU Size 242.93) | -10.53                                              | -8.55  | - | - |

**Table 1045 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                    |                 |                     |
|--------------------|------------------------------------|-----------------|---------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-7  |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2       | Test Method(s): | KDB 987594 clause j |

| DUT Configuration         |                                                        |                          |     |
|---------------------------|--------------------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 SP (Primary) | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                                 | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                               | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                                  | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|-------------------------------------|-----------------------------------------------------|-------|---|---|
|                                     | A                                                   | B     | C | D |
| 6185 (RU Size 996 + RU Size 484.95) | -8.06                                               | -8.12 | - | - |
| 6345 (RU Size 996 + RU Size 484.94) | -8.84                                               | -8.59 | - | - |
| 6665 (RU Size 996 + RU Size 484.94) | -9.20                                               | -8.87 | - | - |

**Table 1046 - Unwanted Emissions Within the Band Results**

| Test Configuration |                              |                 |                     |
|--------------------|------------------------------|-----------------|---------------------|
| Frequency Range:   | 6.425-6.525 GHz              | Band:           | U-NII-6             |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2 | Test Method(s): | KDB 987594 clause j |

| DUT Configuration         |                                                        |                          |     |
|---------------------------|--------------------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 SP (Primary) | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                                 | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                               | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                                  | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|-------------------------------------|-----------------------------------------------------|-------|---|---|
|                                     | A                                                   | B     | C | D |
| 6505 (RU Size 996 + RU Size 484.94) | -8.31                                               | -8.24 | - | - |

**Table 1047 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                    |                 |                     |
|--------------------|------------------------------------|-----------------|---------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-7  |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2       | Test Method(s): | KDB 987594 clause j |

| DUT Configuration         |                                                          |                          |     |
|---------------------------|----------------------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 SP (Secondary) | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                                   | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                                 | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                                    | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|-------------------------------------|-----------------------------------------------------|-------|---|---|
|                                     | A                                                   | B     | C | D |
| 6025 (RU Size 996 + RU Size 484.95) | -9.45                                               | -8.69 | - | - |
| 6185 (RU Size 996 + RU Size 484.94) | -7.09                                               | -7.24 | - | - |
| 6665 (RU Size 996 + RU Size 484.95) | -7.29                                               | -8.63 | - | - |

**Table 1048 - Unwanted Emissions Within the Band Results**

| Test Configuration |                              |                 |                     |
|--------------------|------------------------------|-----------------|---------------------|
| Frequency Range:   | 6.425-6.525 GHz              | Band:           | U-NII-6             |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2 | Test Method(s): | KDB 987594 clause j |

| DUT Configuration         |                                                          |                          |     |
|---------------------------|----------------------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 SP (Secondary) | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                                   | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                                 | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                                    | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|-------------------------------------|-----------------------------------------------------|-------|---|---|
|                                     | A                                                   | B     | C | D |
| 6505 (RU Size 996 + RU Size 484.95) | -8.11                                               | -8.28 | - | - |

**Table 1049 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                    |                 |                     |
|--------------------|------------------------------------|-----------------|---------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-7  |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2       | Test Method(s): | KDB 987594 clause j |

| DUT Configuration         |                                                                      |                          |     |
|---------------------------|----------------------------------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Primary) | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                                               | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                                             | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                                                | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)                              | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|---------------------------------------------------|-----------------------------------------------------|-------|---|---|
|                                                   | A                                                   | B     | C | D |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.97) | -9.15                                               | -8.96 | - | - |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.98) | -7.61                                               | -8.81 | - | - |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.99) | -7.39                                               | -8.20 | - | - |
| 6345 (RU Size 996 + RU Size 484 + RU Size 242.96) | -8.40                                               | -9.67 | - | - |
| 6665 (RU Size 996 + RU Size 484 + RU Size 242.96) | -8.39                                               | -8.21 | - | - |

**Table 1050 - Unwanted Emissions Within the Band Results**

| Test Configuration |                              |                 |                     |
|--------------------|------------------------------|-----------------|---------------------|
| Frequency Range:   | 6.425-6.525 GHz              | Band:           | U-NII-6             |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2 | Test Method(s): | KDB 987594 clause j |

| DUT Configuration         |                                                                      |                          |     |
|---------------------------|----------------------------------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Primary) | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                                               | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                                             | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                                                | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)                              | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|---------------------------------------------------|-----------------------------------------------------|-------|---|---|
|                                                   | A                                                   | B     | C | D |
| 6505 (RU Size 996 + RU Size 484 + RU Size 242.96) | -7.44                                               | -9.38 | - | - |

**Table 1051 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                    |                 |                     |
|--------------------|------------------------------------|-----------------|---------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.525-6.875 GHz | Band:           | U-NII-5<br>U-NII-7  |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2       | Test Method(s): | KDB 987594 clause j |

| DUT Configuration         |                                                                        |                          |     |
|---------------------------|------------------------------------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Secondary) | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                                                 | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                                               | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                                                  | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)                              | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|---------------------------------------------------|-----------------------------------------------------|-------|---|---|
|                                                   | A                                                   | B     | C | D |
| 6025 (RU Size 996 + RU Size 484 + RU Size 242.99) | -9.87                                               | -9.57 | - | - |
| 6665 (RU Size 996 + RU Size 484 + RU Size 242.99) | -8.41                                               | -8.22 | - | - |

**Table 1052 - Unwanted Emissions Within the Band Results**

| Test Configuration |                              |                 |                     |
|--------------------|------------------------------|-----------------|---------------------|
| Frequency Range:   | 6.425-6.525 GHz              | Band:           | U-NII-6             |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2 | Test Method(s): | KDB 987594 clause j |

| DUT Configuration         |                                                                        |                          |     |
|---------------------------|------------------------------------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Secondary) | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                                                 | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                                               | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                                                  | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)                              | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|---------------------------------------------------|-----------------------------------------------------|-------|---|---|
|                                                   | A                                                   | B     | C | D |
| 6505 (RU Size 996 + RU Size 484 + RU Size 242.99) | -8.94                                               | -7.63 | - | - |

**Table 1053 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration      |                       |                          |     |
|------------------------|-----------------------|--------------------------|-----|
| Mode:                  | 802.11a20 VLP         | Duty Cycle (%):          | -   |
| Data Rate:             | 12 Mbps               | DCCF (dB):               | -   |
| Antenna Configuration: | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):        | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 6115                 | -14.20                                              | -14.83 | - | - |
| 6275                 | -14.31                                              | -15.37 | - | - |
| 6415                 | -14.95                                              | -14.95 | - | - |
| 6435                 | -14.05                                              | -16.16 | - | - |
| 6475                 | -15.88                                              | -15.35 | - | - |
| 6515                 | -14.59                                              | -16.02 | - | - |
| 6535                 | -14.10                                              | -15.97 | - | - |
| 6695                 | -15.16                                              | -15.31 | - | - |
| 6855                 | -14.49                                              | -16.25 | - | - |
| 6875                 | -15.23                                              | -14.64 | - | - |
| 6895                 | -15.25                                              | -16.08 | - | - |
| 7015                 | -13.89                                              | -16.38 | - | - |
| 7095                 | -14.59                                              | -15.68 | - | - |
| 7115                 | -14.02                                              | -14.61 | - | - |

**Table 1054 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration      |                       |                          |     |
|------------------------|-----------------------|--------------------------|-----|
| Mode:                  | 802.11a40 VLP         | Duty Cycle (%):          | -   |
| Data Rate:             | 12 Mbps               | DCCF (dB):               | -   |
| Antenna Configuration: | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):        | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 6125                 | -11.98                                              | -12.58 | - | - |
| 6285                 | -11.38                                              | -12.17 | - | - |
| 6405                 | -12.55                                              | -13.21 | - | - |
| 6445                 | -11.17                                              | -11.55 | - | - |
| 6485                 | -11.13                                              | -11.41 | - | - |
| 6525                 | -11.09                                              | -11.32 | - | - |
| 6565                 | -11.13                                              | -11.48 | - | - |
| 6725                 | -13.13                                              | -11.88 | - | - |
| 6845                 | -12.87                                              | -13.22 | - | - |
| 6885                 | -12.85                                              | -13.18 | - | - |
| 6925                 | -12.81                                              | -13.05 | - | - |
| 7005                 | -11.24                                              | -13.19 | - | - |
| 7085                 | -11.16                                              | -12.88 | - | - |

**Table 1055 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration      |                       |                          |     |
|------------------------|-----------------------|--------------------------|-----|
| Mode:                  | 802.11a80 VLP         | Duty Cycle (%):          | -   |
| Data Rate:             | 12 Mbps               | DCCF (dB):               | -   |
| Antenna Configuration: | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):        | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 6145                 | -10.03                                              | -9.98  | - | - |
| 6305                 | -10.68                                              | -10.67 | - | - |
| 6385                 | -9.79                                               | -10.63 | - | - |
| 6465                 | -9.62                                               | -10.10 | - | - |
| 6545                 | -8.86                                               | -9.02  | - | - |
| 6625                 | -9.54                                               | -9.25  | - | - |
| 6705                 | -10.43                                              | -10.55 | - | - |
| 6785                 | -10.69                                              | -8.96  | - | - |
| 6865                 | -8.57                                               | -9.86  | - | - |
| 6945                 | -11.01                                              | -9.59  | - | - |
| 7025                 | -10.49                                              | -8.37  | - | - |

**Table 1056 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration      |                       |                          |     |
|------------------------|-----------------------|--------------------------|-----|
| Mode:                  | 802.11a160 VLP        | Duty Cycle (%):          | -   |
| Data Rate:             | 12 Mbps               | DCCF (dB):               | -   |
| Antenna Configuration: | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):        | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|----------------------|-----------------------------------------------------|-------|---|---|
|                      | A                                                   | B     | C | D |
| 6185                 | -8.52                                               | -9.50 | - | - |
| 6345                 | -8.40                                               | -8.65 | - | - |
| 6505                 | -6.66                                               | -6.77 | - | - |
| 6665                 | -7.28                                               | -8.50 | - | - |
| 6825                 | -8.37                                               | -8.66 | - | - |
| 6985                 | -6.94                                               | -7.60 | - | - |

**Table 1057 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                       |                          |     |
|---------------------------|-----------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE20 SU VLP  | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 6115                 | -16.74                                              | -17.34 | - | - |
| 6275                 | -16.40                                              | -16.80 | - | - |
| 6415                 | -15.85                                              | -16.55 | - | - |
| 6435                 | -15.85                                              | -16.52 | - | - |
| 6475                 | -15.84                                              | -16.17 | - | - |
| 6515                 | -15.59                                              | -15.90 | - | - |
| 6535                 | -15.46                                              | -16.06 | - | - |
| 6695                 | -16.01                                              | -16.49 | - | - |
| 6855                 | -15.89                                              | -16.32 | - | - |
| 6875                 | -15.86                                              | -16.58 | - | - |
| 6895                 | -16.13                                              | -16.41 | - | - |
| 6995                 | -15.82                                              | -16.29 | - | - |
| 7095                 | -16.08                                              | -16.17 | - | - |

**Table 1058 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                       |                          |     |
|---------------------------|-----------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE40 SU VLP  | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 6125                 | -11.81                                              | -12.03 | - | - |
| 6285                 | -11.45                                              | -11.73 | - | - |
| 6405                 | -12.59                                              | -13.12 | - | - |
| 6445                 | -11.04                                              | -11.48 | - | - |
| 6485                 | -10.98                                              | -11.33 | - | - |
| 6525                 | -11.05                                              | -11.36 | - | - |
| 6565                 | -11.18                                              | -11.40 | - | - |
| 6725                 | -11.31                                              | -11.79 | - | - |
| 6845                 | -12.71                                              | -13.11 | - | - |
| 6885                 | -12.72                                              | -13.18 | - | - |
| 6925                 | -12.89                                              | -12.80 | - | - |
| 7005                 | -12.73                                              | -12.98 | - | - |
| 7085                 | -12.81                                              | -12.92 | - | - |

**Table 1059 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                       |                          |     |
|---------------------------|-----------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE80 SU VLP  | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 6145                 | -8.71                                               | -9.73  | - | - |
| 6305                 | -9.21                                               | -9.52  | - | - |
| 6385                 | -8.46                                               | -9.19  | - | - |
| 6465                 | -9.38                                               | -10.16 | - | - |
| 6545                 | -8.90                                               | -8.84  | - | - |
| 6625                 | -9.39                                               | -9.54  | - | - |
| 6705                 | -9.05                                               | -8.73  | - | - |
| 6785                 | -8.98                                               | -8.37  | - | - |
| 6865                 | -9.39                                               | -9.49  | - | - |
| 6945                 | -7.54                                               | -9.81  | - | - |
| 7025                 | -7.76                                               | -8.78  | - | - |

**Table 1060 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                       |                          |     |
|---------------------------|-----------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE160 SU VLP | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|----------------------|-----------------------------------------------------|-------|---|---|
|                      | A                                                   | B     | C | D |
| 6345                 | -7.64                                               | -6.33 | - | - |
| 6665                 | -6.91                                               | -7.21 | - | - |
| 6825                 | -7.02                                               | -6.34 | - | - |
| 6985                 | -6.33                                               | -5.25 | - | - |

**Table 1061 - Unwanted Emissions Within the Band Results**

| Test Configuration |                                    |                 |                     |
|--------------------|------------------------------------|-----------------|---------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz | Band:           | U-NII-5<br>U-NII-6  |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2       | Test Method(s): | KDB 987594 clause j |

| DUT Configuration         |                       |                          |     |
|---------------------------|-----------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE160 SU VLP | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|----------------------|-----------------------------------------------------|-------|---|---|
|                      | A                                                   | B     | C | D |
| 6185                 | -7.59                                               | -8.37 | - | - |
| 6505                 | -7.70                                               | -7.35 | - | - |

**Table 1062 - Unwanted Emissions Within the Band Results**



| Test Configuration |                              |                 |                     |
|--------------------|------------------------------|-----------------|---------------------|
| Frequency Range:   | 6.425-6.525 GHz              | Band:           | U-NII-6             |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2 | Test Method(s): | KDB 987594 clause j |

| DUT Configuration         |                                             |                          |     |
|---------------------------|---------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT20 RU Size 106 + RU Size 26 VLP | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                      | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                    | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                       | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)               | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|------------------------------------|-----------------------------------------------------|--------|---|---|
|                                    | A                                                   | B      | C | D |
| 6435 (RU Size 106 + RU Size 26.82) | -14.45                                              | -12.66 | - | - |
| 6475 (RU Size 106 + RU Size 26.82) | -14.70                                              | -12.02 | - | - |
| 6515 (RU Size 106 + RU Size 26.83) | -11.48                                              | -12.82 | - | - |

**Table 1063 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                              |                          |     |
|---------------------------|----------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT80 RU Size 484 + RU Size 242 VLP | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                       | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                     | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                        | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|-------------------------------------|-----------------------------------------------------|--------|---|---|
|                                     | A                                                   | B      | C | D |
| 6145 (RU Size 484 + RU Size 242.92) | -8.95                                               | -10.09 | - | - |
| 6145 (RU Size 484 + RU Size 242.93) | -8.42                                               | -9.65  | - | - |
| 6305 (RU Size 484 + RU Size 242.92) | -9.16                                               | -9.42  | - | - |
| 6385 (RU Size 484 + RU Size 242.90) | -9.12                                               | -9.16  | - | - |
| 6465 (RU Size 484 + RU Size 242.93) | -9.61                                               | -10.02 | - | - |
| 6545 (RU Size 484 + RU Size 242.90) | -9.44                                               | -9.15  | - | - |
| 6545 (RU Size 484 + RU Size 242.93) | -8.73                                               | -8.85  | - | - |
| 6625 (RU Size 484 + RU Size 242.93) | -9.32                                               | -9.76  | - | - |
| 6705 (RU Size 484 + RU Size 242.91) | -7.71                                               | -8.94  | - | - |
| 6785 (RU Size 484 + RU Size 242.90) | -11.02                                              | -8.58  | - | - |
| 6865 (RU Size 484 + RU Size 242.90) | -9.61                                               | -9.84  | - | - |
| 6865 (RU Size 484 + RU Size 242.93) | -9.50                                               | -9.95  | - | - |
| 6945 (RU Size 484 + RU Size 242.93) | -8.17                                               | -9.84  | - | - |
| 7025 (RU Size 484 + RU Size 242.90) | -8.11                                               | -8.93  | - | - |

**Table 1064 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                                         |                          |     |
|---------------------------|---------------------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 VLP (Primary) | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                                  | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                                | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                                   | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|-------------------------------------|-----------------------------------------------------|-------|---|---|
|                                     | A                                                   | B     | C | D |
| 6185 (RU Size 996 + RU Size 484.95) | -8.35                                               | -6.90 | - | - |
| 6345 (RU Size 996 + RU Size 484.94) | -8.76                                               | -8.64 | - | - |
| 6505 (RU Size 996 + RU Size 484.94) | -6.65                                               | -6.96 | - | - |
| 6665 (RU Size 996 + RU Size 484.94) | -7.22                                               | -7.66 | - | - |
| 6825 (RU Size 996 + RU Size 484.94) | -8.96                                               | -6.09 | - | - |
| 6985 (RU Size 996 + RU Size 484.94) | -7.63                                               | -7.57 | - | - |

**Table 1065 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                                           |                          |     |
|---------------------------|-----------------------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 VLP (Secondary) | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                                    | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                                  | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                                     | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)                | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|-------------------------------------|-----------------------------------------------------|-------|---|---|
|                                     | A                                                   | B     | C | D |
| 6185 (RU Size 996 + RU Size 484.94) | -8.38                                               | -6.83 | - | - |
| 6505 (RU Size 996 + RU Size 484.95) | -6.72                                               | -6.87 | - | - |
| 6665 (RU Size 996 + RU Size 484.95) | -7.29                                               | -7.49 | - | - |
| 6825 (RU Size 996 + RU Size 484.95) | -8.42                                               | -6.45 | - | - |
| 6985 (RU Size 996 + RU Size 484.95) | -7.42                                               | -8.01 | - | - |

**Table 1066 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                                                       |                          |     |
|---------------------------|-----------------------------------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 VLP (Primary) | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                                                | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                                              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                                                 | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)                              | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|---------------------------------------------------|-----------------------------------------------------|-------|---|---|
|                                                   | A                                                   | B     | C | D |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.97) | -8.47                                               | -6.95 | - | - |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.98) | -8.67                                               | -6.69 | - | - |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.99) | -7.63                                               | -6.72 | - | - |
| 6345 (RU Size 996 + RU Size 484 + RU Size 242.96) | -8.57                                               | -8.83 | - | - |
| 6505 (RU Size 996 + RU Size 484 + RU Size 242.96) | -6.87                                               | -7.31 | - | - |
| 6665 (RU Size 996 + RU Size 484 + RU Size 242.96) | -7.31                                               | -8.25 | - | - |
| 6825 (RU Size 996 + RU Size 484 + RU Size 242.96) | -8.34                                               | -6.26 | - | - |
| 6985 (RU Size 996 + RU Size 484 + RU Size 242.96) | -7.34                                               | -6.68 | - | - |

**Table 1067 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                       |                 |                               |
|--------------------|-------------------------------------------------------|-----------------|-------------------------------|
| Frequency Range:   | 6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                          | Test Method(s): | KDB 987594 clause j           |

| DUT Configuration         |                                                                         |                          |     |
|---------------------------|-------------------------------------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 VLP (Secondary) | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                                                  | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                                                | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                                                   | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)                              | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|---------------------------------------------------|-----------------------------------------------------|-------|---|---|
|                                                   | A                                                   | B     | C | D |
| 6505 (RU Size 996 + RU Size 484 + RU Size 242.99) | -7.15                                               | -6.89 | - | - |
| 6665 (RU Size 996 + RU Size 484 + RU Size 242.99) | -6.98                                               | -7.91 | - | - |
| 6825 (RU Size 996 + RU Size 484 + RU Size 242.99) | -7.12                                               | -5.90 | - | - |
| 6985 (RU Size 996 + RU Size 484 + RU Size 242.99) | -7.28                                               | -7.84 | - | - |

**Table 1068 - Unwanted Emissions Within the Band Results**

| Test Configuration |                              |                 |                     |
|--------------------|------------------------------|-----------------|---------------------|
| Frequency Range:   | 5.925-6.425 GHz              | Band:           | U-NII-5             |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2 | Test Method(s): | KDB 987594 clause j |

| DUT Configuration         |                                                                         |                          |     |
|---------------------------|-------------------------------------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 VLP (Secondary) | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x1                                                                  | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO CDD                                                                | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                                                   | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)                              | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|---------------------------------------------------|-----------------------------------------------------|-------|---|---|
|                                                   | A                                                   | B     | C | D |
| 6185 (RU Size 996 + RU Size 484 + RU Size 242.99) | -8.50                                               | -8.24 | - | - |

**Table 1069 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                       |                          |     |
|---------------------------|-----------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE20 SU LPI  | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x2                | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO SDM              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5955                 | -16.75                                              | -16.78 | - | - |
| 6195                 | -17.28                                              | -17.00 | - | - |
| 6415                 | -14.98                                              | -15.80 | - | - |
| 6435                 | -16.03                                              | -16.96 | - | - |
| 6475                 | -14.93                                              | -17.28 | - | - |
| 6515                 | -16.62                                              | -16.83 | - | - |
| 6535                 | -15.43                                              | -14.70 | - | - |
| 6695                 | -16.27                                              | -16.53 | - | - |
| 6855                 | -16.70                                              | -16.04 | - | - |
| 6875                 | -16.28                                              | -15.94 | - | - |
| 6895                 | -17.12                                              | -16.63 | - | - |
| 6995                 | -17.14                                              | -16.84 | - | - |
| 7095                 | -17.57                                              | -15.89 | - | - |

**Table 1070 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                       |                          |     |
|---------------------------|-----------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE40 SU LPI  | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x2                | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO SDM              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5965                 | -10.10                                              | -9.67  | - | - |
| 6205                 | -9.35                                               | -9.46  | - | - |
| 6405                 | -9.72                                               | -9.41  | - | - |
| 6445                 | -8.40                                               | -10.03 | - | - |
| 6485                 | -9.65                                               | -9.66  | - | - |
| 6525                 | -9.22                                               | -9.97  | - | - |
| 6565                 | -8.58                                               | -8.61  | - | - |
| 6725                 | -8.94                                               | -10.06 | - | - |
| 6845                 | -10.84                                              | -11.89 | - | - |
| 6885                 | -10.67                                              | -11.82 | - | - |
| 6925                 | -10.44                                              | -10.05 | - | - |
| 7005                 | -9.83                                               | -10.29 | - | - |
| 7085                 | -9.80                                               | -9.93  | - | - |

**Table 1071 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                       |                          |     |
|---------------------------|-----------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE80 SU LPI  | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x2                | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO SDM              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|----------------------|-----------------------------------------------------|-------|---|---|
|                      | A                                                   | B     | C | D |
| 5985                 | -9.76                                               | -9.65 | - | - |
| 6225                 | -9.18                                               | -9.47 | - | - |
| 6385                 | -9.30                                               | -8.69 | - | - |
| 6465                 | -8.63                                               | -9.33 | - | - |
| 6545                 | -8.36                                               | -9.07 | - | - |
| 6625                 | -7.96                                               | -8.05 | - | - |
| 6705                 | -8.46                                               | -9.71 | - | - |
| 6785                 | -9.44                                               | -7.88 | - | - |
| 6865                 | -9.90                                               | -9.62 | - | - |
| 6945                 | -8.01                                               | -8.19 | - | - |
| 7025                 | -9.65                                               | -9.15 | - | - |

**Table 1072 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                       |                          |     |
|---------------------------|-----------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE160 SU LPI | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x2                | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO SDM              | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1) | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |       |   |   |
|----------------------|-----------------------------------------------------|-------|---|---|
|                      | A                                                   | B     | C | D |
| 6025                 | -8.30                                               | -7.56 | - | - |
| 6185                 | -7.24                                               | -7.42 | - | - |
| 6345                 | -7.48                                               | -7.19 | - | - |
| 6505                 | -8.00                                               | -7.24 | - | - |
| 6665                 | -7.37                                               | -7.38 | - | - |
| 6825                 | -6.99                                               | -7.03 | - | - |
| 6985                 | -6.91                                               | -7.38 | - | - |

**Table 1073 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                    |                 |                     |
|--------------------|------------------------------------|-----------------|---------------------|
| Frequency Range:   | 6.425-6.525 GHz<br>6.875-7.125 GHz | Band:           | U-NII-6<br>U-NII-8  |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2       | Test Method(s): | KDB 987594 clause j |

| DUT Configuration         |                        |                          |     |
|---------------------------|------------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE20 RU26 LPI | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x2                 | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO SDM               | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)  | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 6435 (RU26.0)        | -13.31                                              | -13.41 | - | - |
| 6475 (RU26.0)        | -12.61                                              | -12.52 | - | - |
| 6515 (RU26.8)        | -13.49                                              | -13.44 | - | - |
| 7095 (RU26.8)        | -12.31                                              | -13.64 | - | - |

**Table 1074 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                        |                          |     |
|---------------------------|------------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE20 RU52 LPI | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x2                 | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO SDM               | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)  | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5955 (RU52.37)       | -10.85                                              | -12.61 | - | - |
| 6195 (RU52.37)       | -12.69                                              | -12.32 | - | - |
| 6415 (RU52.40)       | -12.13                                              | -12.43 | - | - |
| 6435 (RU52.37)       | -12.86                                              | -12.77 | - | - |
| 6475 (RU52.37)       | -12.75                                              | -13.32 | - | - |
| 6515 (RU52.40)       | -13.50                                              | -12.19 | - | - |
| 6535 (RU52.37)       | -13.30                                              | -11.69 | - | - |
| 6695 (RU52.37)       | -11.52                                              | -12.83 | - | - |
| 6855 (RU52.40)       | -13.69                                              | -13.65 | - | - |
| 6875 (RU52.38)       | -17.72                                              | -18.19 | - | - |
| 6875 (RU52.39)       | -17.66                                              | -18.37 | - | - |
| 6895 (RU52.37)       | -12.57                                              | -14.24 | - | - |
| 6995 (RU52.37)       | -12.08                                              | -12.02 | - | - |
| 7095 (RU52.40)       | -13.70                                              | -13.26 | - | - |

**Table 1075 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                         |                          |     |
|---------------------------|-------------------------|--------------------------|-----|
| Mode:                     | 802.11ax HE20 RU106 LPI | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x2                  | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO SDM                | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)   | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz) | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|----------------------|-----------------------------------------------------|--------|---|---|
|                      | A                                                   | B      | C | D |
| 5955 (RU106.53)      | -13.14                                              | -12.99 | - | - |
| 6195 (RU106.53)      | -14.70                                              | -13.65 | - | - |
| 6415 (RU106.54)      | -14.72                                              | -12.70 | - | - |
| 6435 (RU106.53)      | -14.37                                              | -13.56 | - | - |
| 6475 (RU106.53)      | -14.78                                              | -12.62 | - | - |
| 6515 (RU106.54)      | -13.15                                              | -12.68 | - | - |
| 6535 (RU106.53)      | -12.92                                              | -13.53 | - | - |
| 6695 (RU106.53)      | -13.46                                              | -13.09 | - | - |
| 6855 (RU106.54)      | -13.05                                              | -13.58 | - | - |
| 6875 (RU106.53)      | -14.49                                              | -14.61 | - | - |
| 6875 (RU106.54)      | -13.83                                              | -14.30 | - | - |
| 6895 (RU106.53)      | -14.23                                              | -13.25 | - | - |
| 6995 (RU106.53)      | -13.08                                              | -13.89 | - | - |
| 7095 (RU106.54)      | -13.02                                              | -13.36 | - | - |

**Table 1076 - Unwanted Emissions Within the Band Results**



| Test Configuration |                                                                          |                 |                                          |
|--------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------|
| Frequency Range:   | 5.925-6.425 GHz<br>6.425-6.525 GHz<br>6.525-6.875 GHz<br>6.875-7.125 GHz | Band:           | U-NII-5<br>U-NII-6<br>U-NII-7<br>U-NII-8 |
| Limit Clause(s):   | 15.407(b)(7) / RSS-248 4.6.2                                             | Test Method(s): | KDB 987594 clause j                      |

| DUT Configuration         |                                            |                          |     |
|---------------------------|--------------------------------------------|--------------------------|-----|
| Mode:                     | 802.11be EHT20 RU Size 52 + RU Size 26 LPI | Duty Cycle (%):          | -   |
| Modulation Coding Scheme: | MCS2x2                                     | DCCF (dB):               | -   |
| Antenna Configuration:    | MIMO SDM                                   | Peak Antenna Gain (dBi): | -   |
| Active Port(s):           | A+B (Core 0 + Core 1)                      | Active Chain Id(s):      | 0+1 |

| Test Frequency (MHz)              | Unwanted Emissions Within the RLAN Band Margin (dB) |        |   |   |
|-----------------------------------|-----------------------------------------------------|--------|---|---|
|                                   | A                                                   | B      | C | D |
| 5955 (RU Size 52 + RU Size 26.70) | -16.89                                              | -15.59 | - | - |
| 6195 (RU Size 52 + RU Size 26.70) | -17.49                                              | -15.41 | - | - |
| 6415 (RU Size 52 + RU Size 26.72) | -16.70                                              | -15.57 | - | - |
| 6435 (RU Size 52 + RU Size 26.70) | -16.79                                              | -15.15 | - | - |
| 6475 (RU Size 52 + RU Size 26.70) | -16.09                                              | -15.89 | - | - |
| 6515 (RU Size 52 + RU Size 26.72) | -15.69                                              | -17.33 | - | - |
| 6535 (RU Size 52 + RU Size 26.70) | -17.00                                              | -16.02 | - | - |
| 6695 (RU Size 52 + RU Size 26.70) | -17.22                                              | -15.51 | - | - |
| 6855 (RU Size 52 + RU Size 26.72) | -14.83                                              | -16.10 | - | - |
| 6875 (RU Size 52 + RU Size 26.70) | -16.10                                              | -15.06 | - | - |
| 6875 (RU Size 52 + RU Size 26.72) | -16.07                                              | -15.88 | - | - |
| 6895 (RU Size 52 + RU Size 26.70) | -16.04                                              | -16.57 | - | - |
| 6995 (RU Size 52 + RU Size 26.70) | -16.33                                              | -17.24 | - | - |
| 7095 (RU Size 52 + RU Size 26.72) | -15.05                                              | -16.37 | - | - |

**Table 1077 - Unwanted Emissions Within the Band Results**