



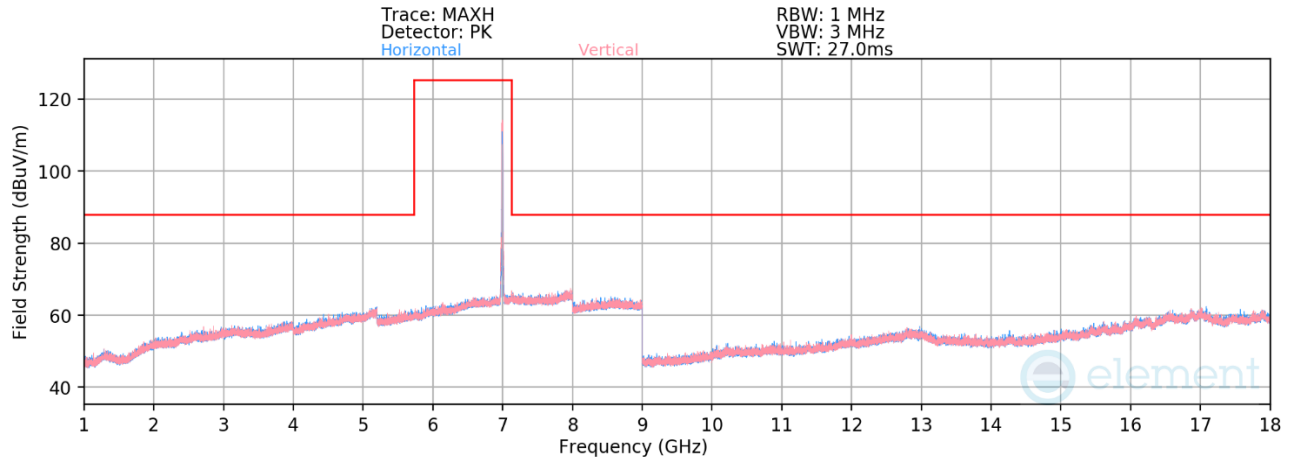

Plot 7-1387. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 209 – RU242)

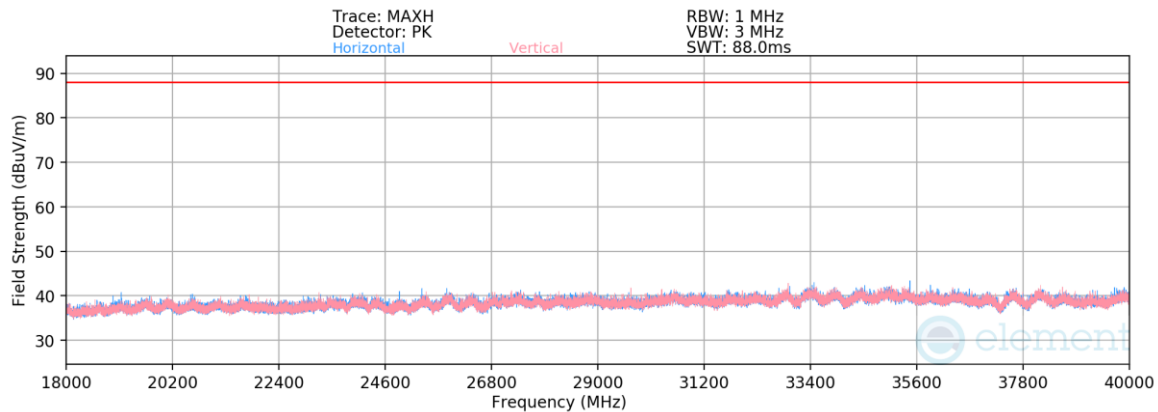

Plot 7-1388. Radiated Spurious Emissions 18-40GHz SDM Primary (802.11be – Ch. 209 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6995MHz
Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13990.00	Average	V	-	-	-83.90	18.45	0.00	41.55	68.23	-26.68
13990.00	Peak	V	-	-	-72.11	18.45	0.00	53.34	88.23	-34.89
* 20985.00	Average	H	-	-	-61.00	-7.58	-9.54	28.88	53.98	-25.10
* 20985.00	Peak	H	-	-	-48.74	-7.58	-9.54	41.14	73.98	-32.84
27980.00	Average	H	-	-	-63.50	-4.26	-9.54	29.69	68.23	-38.54
27980.00	Peak	H	-	-	-52.12	-4.26	-9.54	41.08	88.23	-47.15
34975.00	Average	V	-	-	-61.26	-4.53	-9.54	31.66	68.23	-36.57
34975.00	Peak	V	-	-	-49.94	-4.53	-9.54	42.98	88.23	-45.25

Table 7-226. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 440 of 644

V 11.0 05/2025

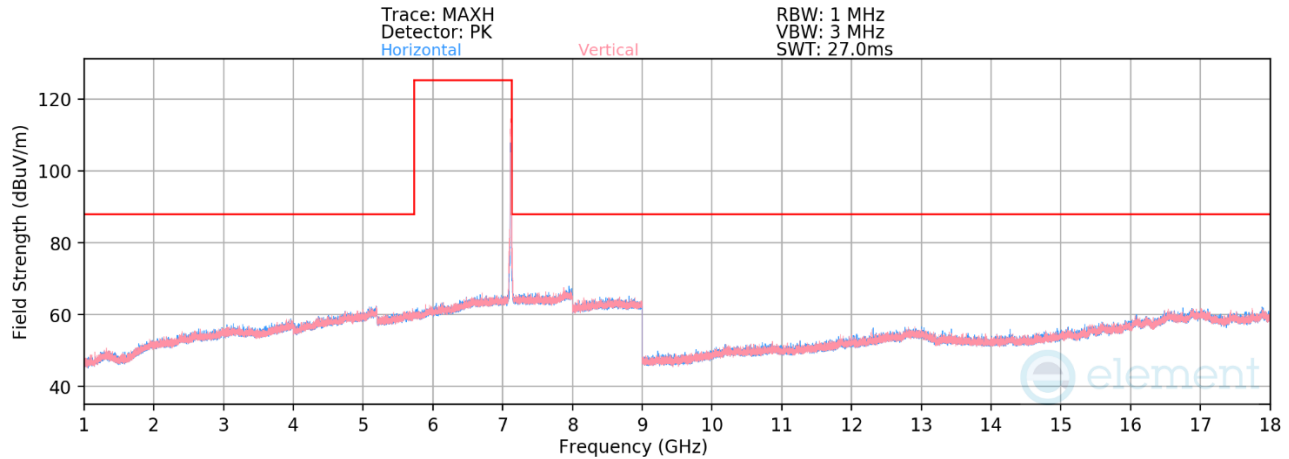

Plot 7-1389. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 233 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 7115MHz
Channel: 233

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
14230.00	Average	H	-	-	-83.98	18.49	41.51	68.23	-26.72
14230.00	Peak	H	-	-	-73.14	18.49	52.35	88.23	-35.88


Table 7-227. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 441 of 644

V 11.0 05/2025

7.7.2 CDD/SDM Diversity Radiated Spurious Emission

RU26

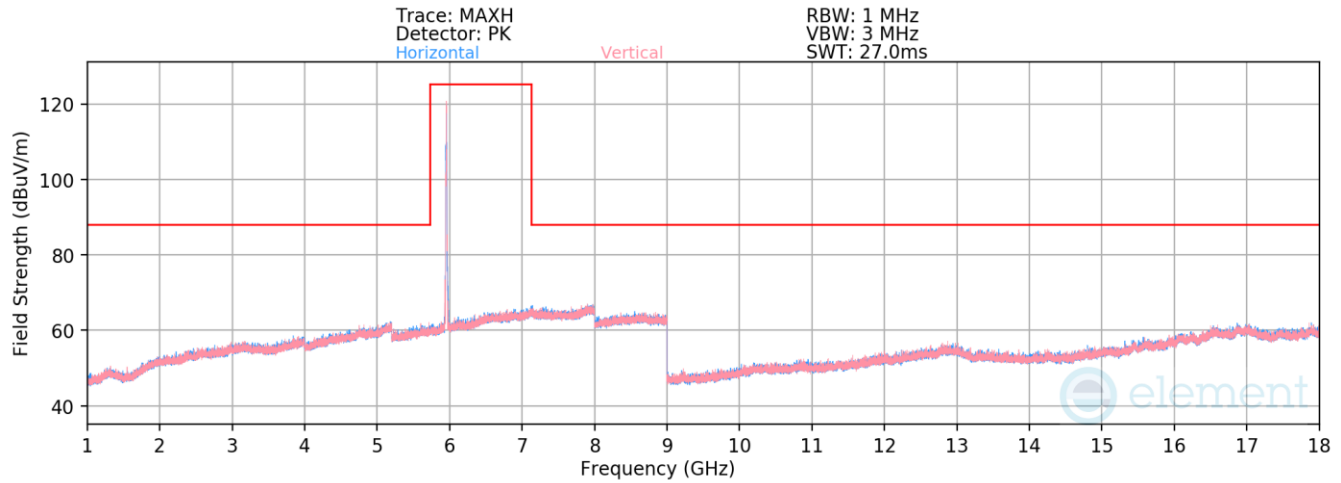

Plot 7-1390. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 1 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11910.00	Average	V	-	-	-84.20	20.24	43.04	53.98	-10.94
* 11910.00	Peak	V	-	-	-73.06	20.24	54.18	73.98	-19.80
* 17865.00	Average	V	-	-	-84.57	25.11	47.55	53.98	-6.43
* 17865.00	Peak	V	-	-	-73.64	25.11	58.48	73.98	-15.50


Table 7-228. Radiated Spurious Emission Measurements CDD Diversity – RU26

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 442 of 644

V 11.0 05/2025

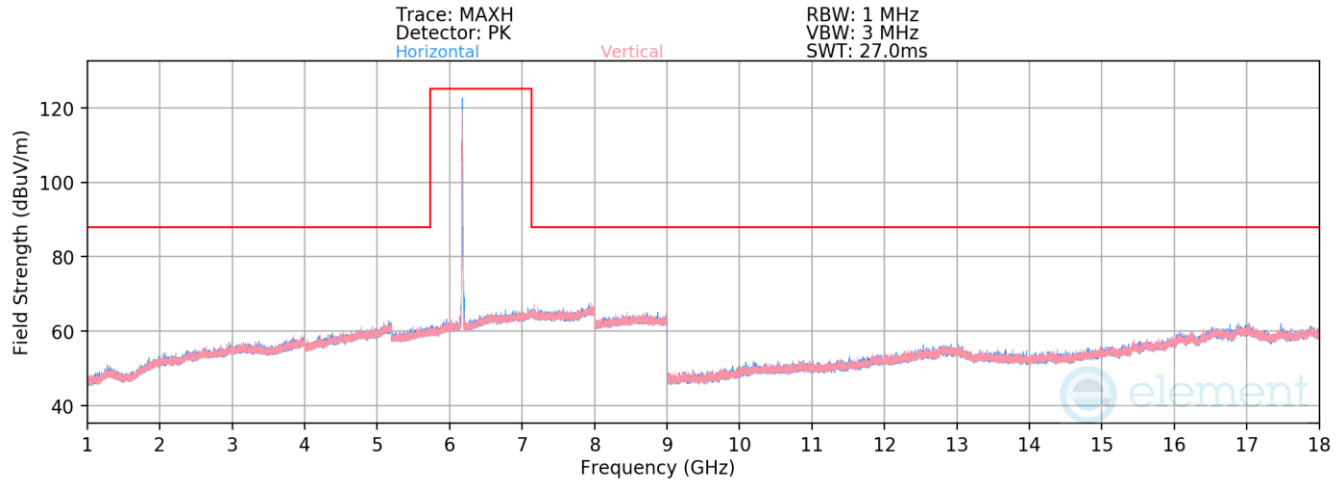

Plot 7-1391. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 45 – RU26)

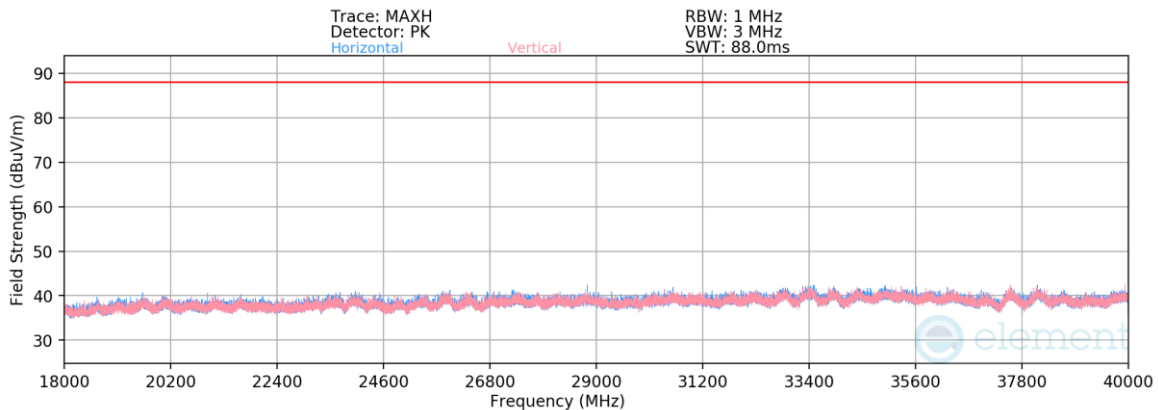

Plot 7-1392. Radiated Spurious Emissions 18-40GHz CDD Diversity (802.11be – Ch. 45 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6175MHz
Channel: 45

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dBm]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	12350.00	Average	V	-	-	-84.73	20.93	0.00	43.20	53.98	-10.78
*	12350.00	Peak	V	-	-	-73.06	20.93	0.00	54.87	73.98	-19.11
*	18525.00	Average	H	-	-	-61.97	-7.31	-9.54	28.18	53.98	-25.80
*	18525.00	Peak	H	-	-	-50.75	-7.31	-9.54	39.40	73.98	-34.58
	24700.00	Average	H	-	-	-63.06	-6.64	-9.54	27.75	68.23	-40.48
	24700.00	Peak	H	-	-	-51.15	-6.64	-9.54	39.66	88.23	-48.57
	30875.00	Average	H	-	-	-63.75	-3.70	-9.54	30.00	68.23	-38.23
	30875.00	Peak	H	-	-	-52.42	-3.70	-9.54	41.34	88.23	-46.89

Table 7-229. Radiated Spurious Emission Measurements CDD Diversity – RU26

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 443 of 644

V 11.0 05/2025

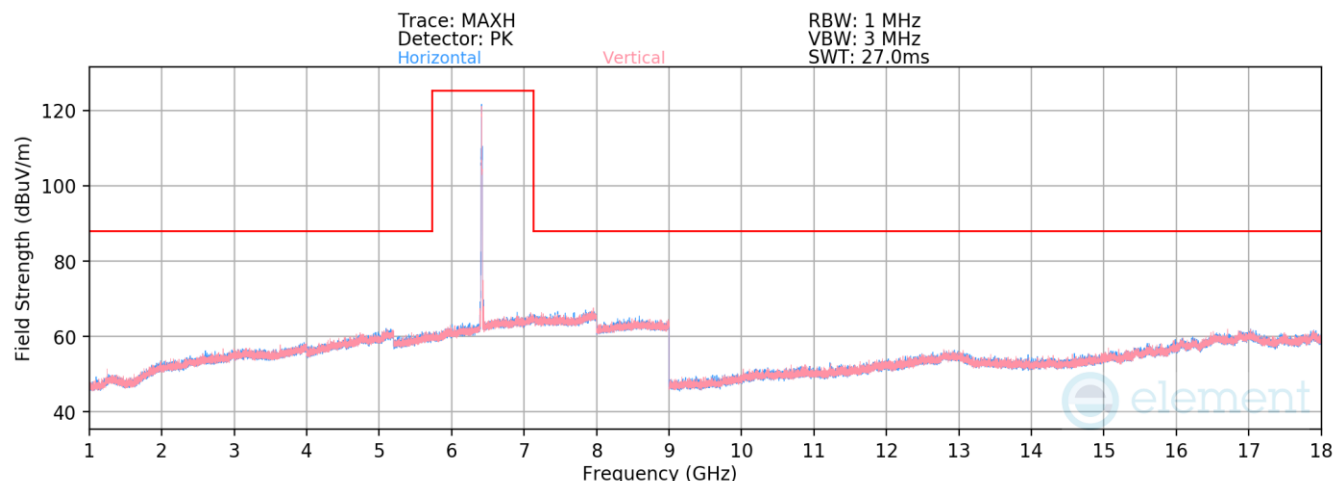

Plot 7-1393. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 93 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12830.00	Average	H	-	-	-85.10	22.10	44.01	68.23	-24.22
12830.00	Peak	H	-	-	-73.91	22.10	55.19	88.23	-33.04

Table 7-230. Radiated Spurious Emission Measurements CDD Diversity – RU26

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 444 of 644

V 11.0 05/2025

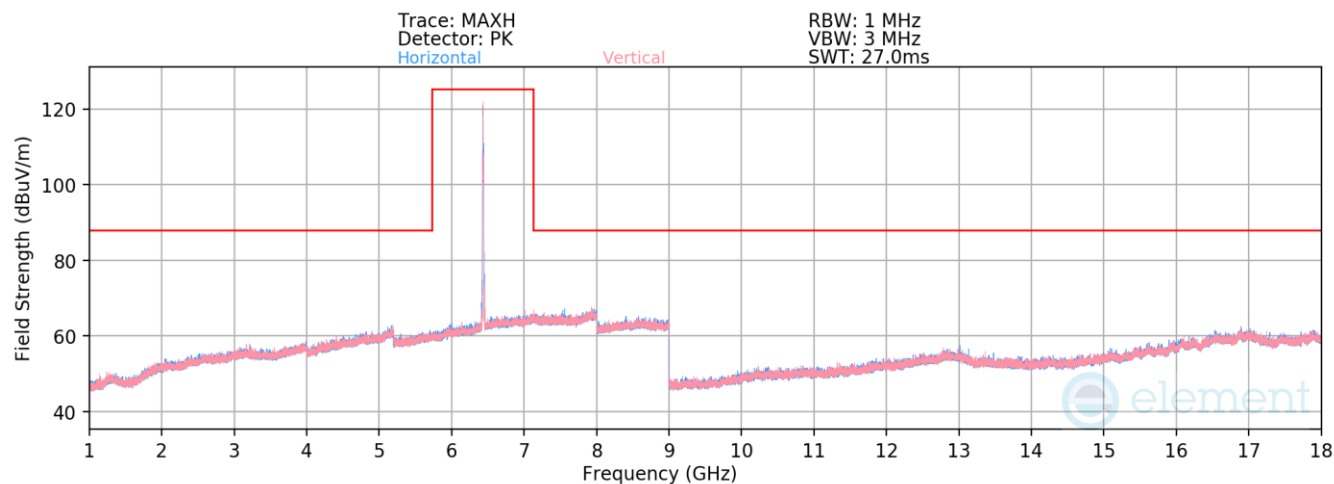

Plot 7-1394. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 97 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435MHz
Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12870.00	Average	V	-	-	-84.87	21.66	43.79	68.23	-24.44
12870.00	Peak	V	-	-	-73.20	21.66	55.46	88.23	-32.77


Table 7-231. Radiated Spurious Emission Measurements CDD Diversity – RU26

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 445 of 644

V 11.0 05/2025

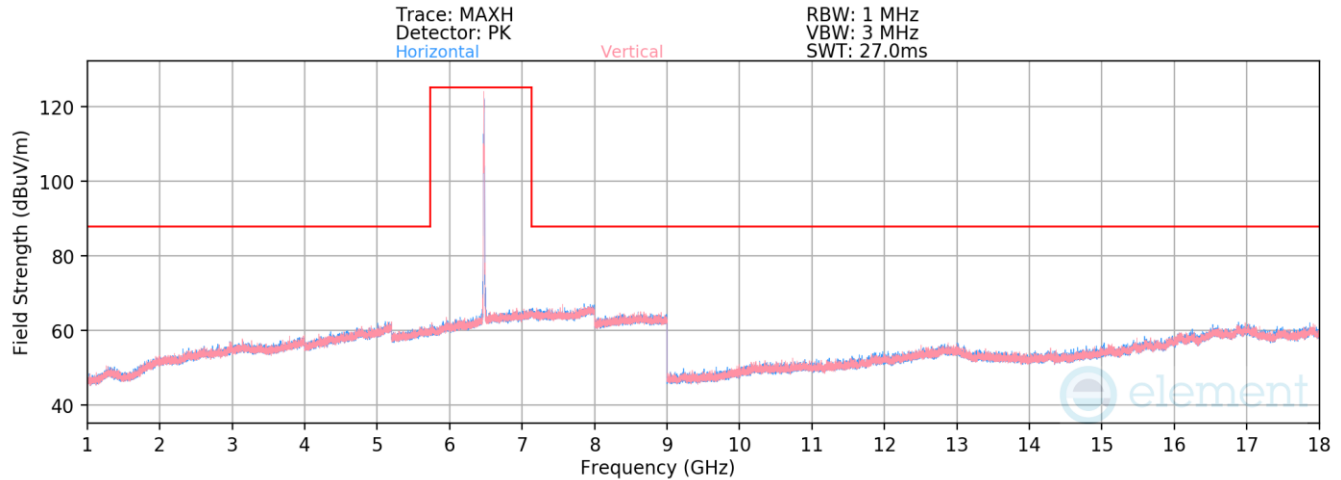

Plot 7-1395. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 105 – RU26)

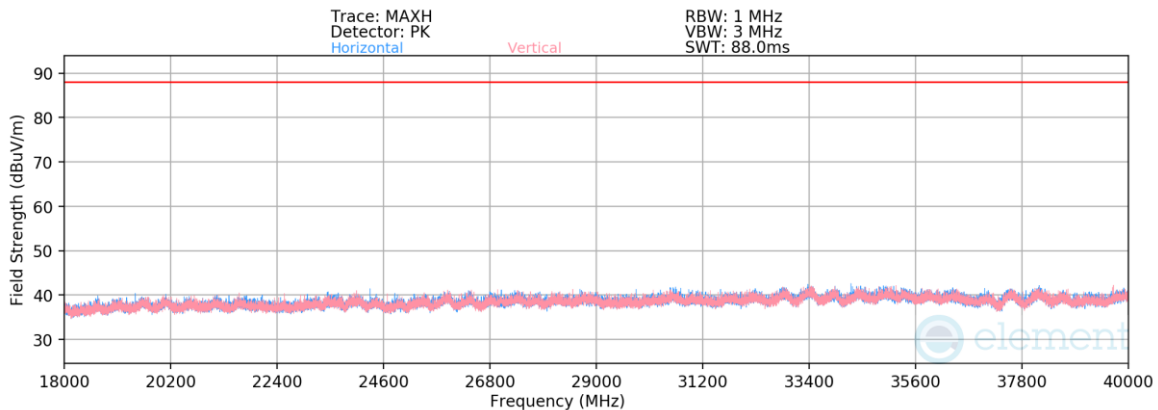

Plot 7-1396. Radiated Spurious Emissions 18-40GHz CDD Diversity (802.11be – Ch. 105 – RU26)

Mode: 802.11be

Data Rate: MCS0

Distance of Measurements: 3 Meters


Operating Frequency: 6475MHz

Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12950.00	Average	V	-	-	-85.00	21.81	0.00	43.80	68.23	-24.43
12950.00	Peak	V	-	-	-73.50	21.81	0.00	55.31	88.23	-32.92
* 19425.00	Average	V	-	-	-61.62	-7.74	-9.54	28.09	53.98	-25.89
* 19425.00	Peak	V	-	-	-50.12	-7.74	-9.54	39.59	73.98	-34.39
25900.00	Average	V	-	-	-61.06	-5.82	-9.54	30.57	68.23	-37.66
25900.00	Peak	V	-	-	-49.84	-5.82	-9.54	41.79	88.23	-46.44
32375.00	Average	V	-	-	-63.70	-3.92	-9.54	29.83	68.23	-38.40
32375.00	Peak	V	-	-	-52.14	-3.92	-9.54	41.40	88.23	-46.83

Table 7-232. Radiated Spurious Emission Measurements CDD Diversity – RU26

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 446 of 644

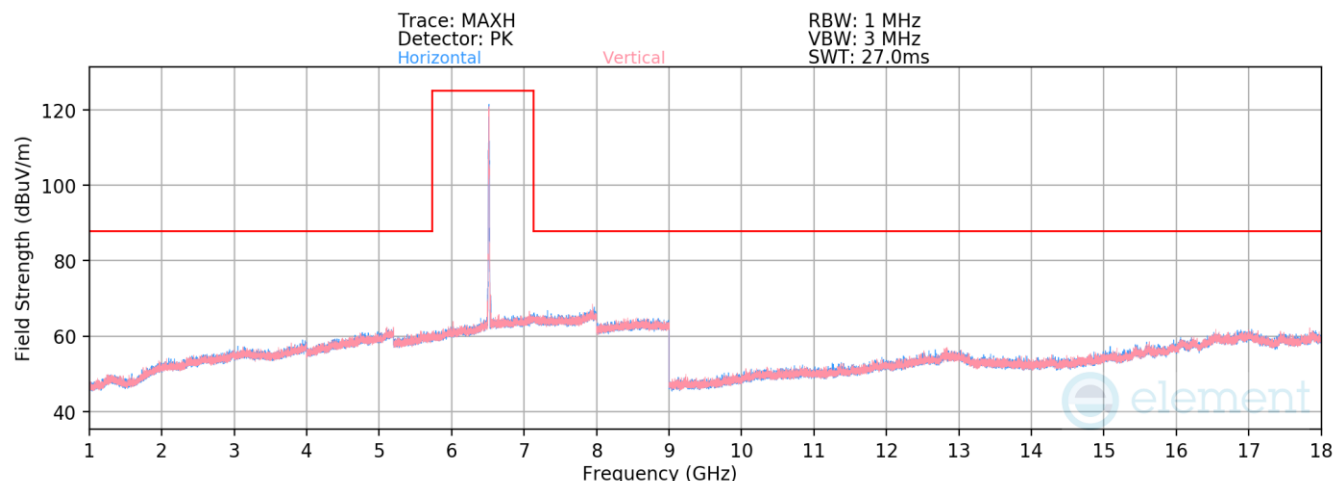

Plot 7-1397. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 113 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6515MHz
Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13030.00	Average	V	-	-	-85.39	22.04	43.66	68.23	-24.57
13030.00	Peak	V	-	-	-74.41	22.04	54.63	88.23	-33.60

Table 7-233. Radiated Spurious Emission Measurements CDD Diversity – RU26

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 447 of 644

V 11.0 05/2025

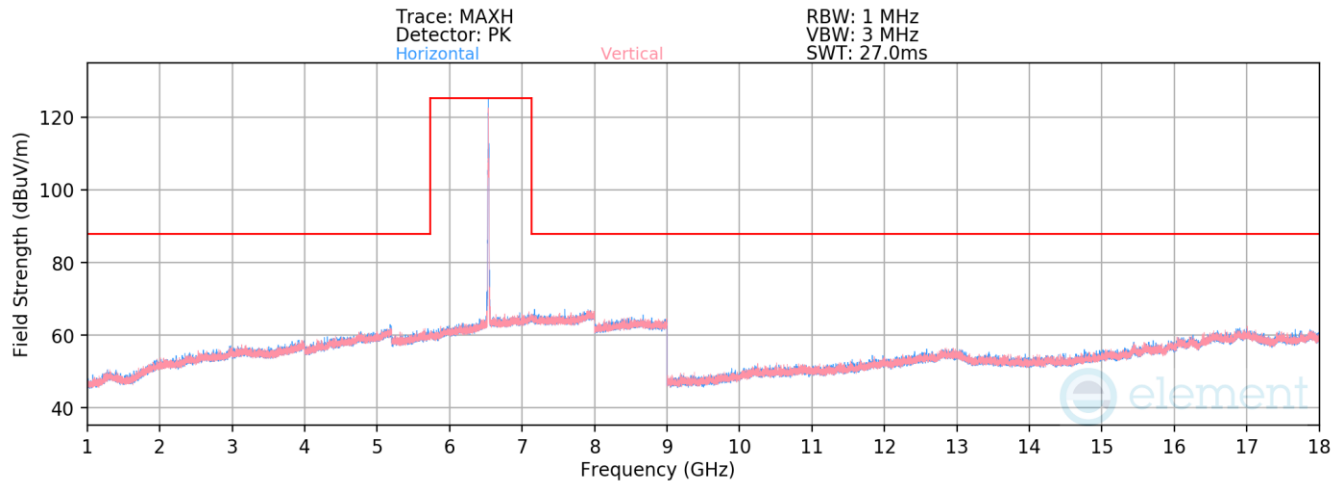

Plot 7-1398. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 117 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535MHz
Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13070.00	Average	H	-	-	-85.38	21.71	43.33	68.23	-24.90
13070.00	Peak	H	-	-	-73.53	21.71	55.18	88.23	-33.05


Table 7-234. Radiated Spurious Emission Measurements CDD Diversity – RU26

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 448 of 644

V 11.0 05/2025

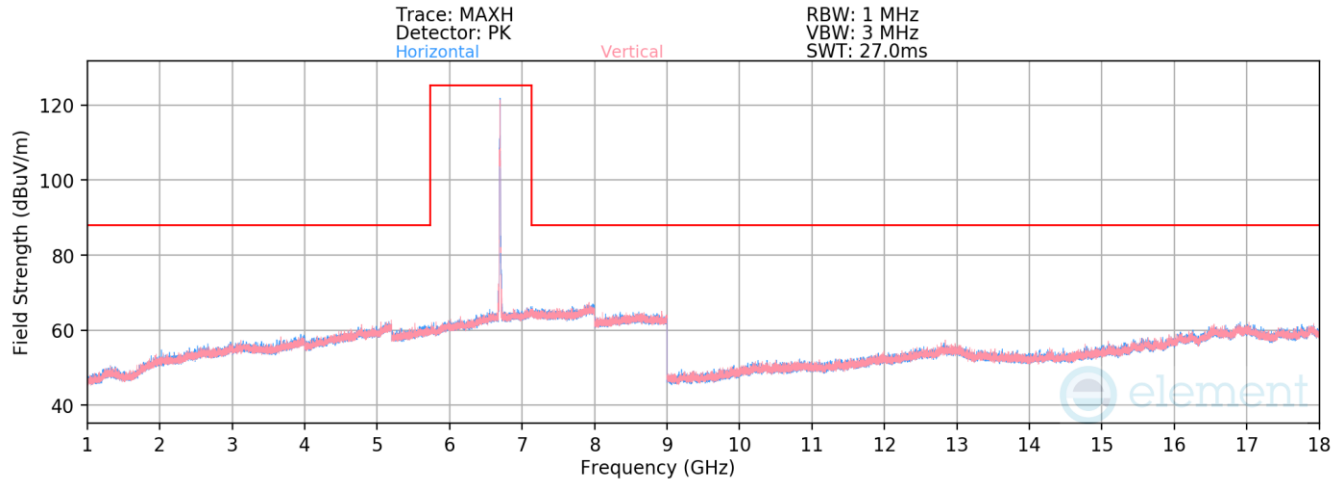

Plot 7-1399. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 149 – RU26)

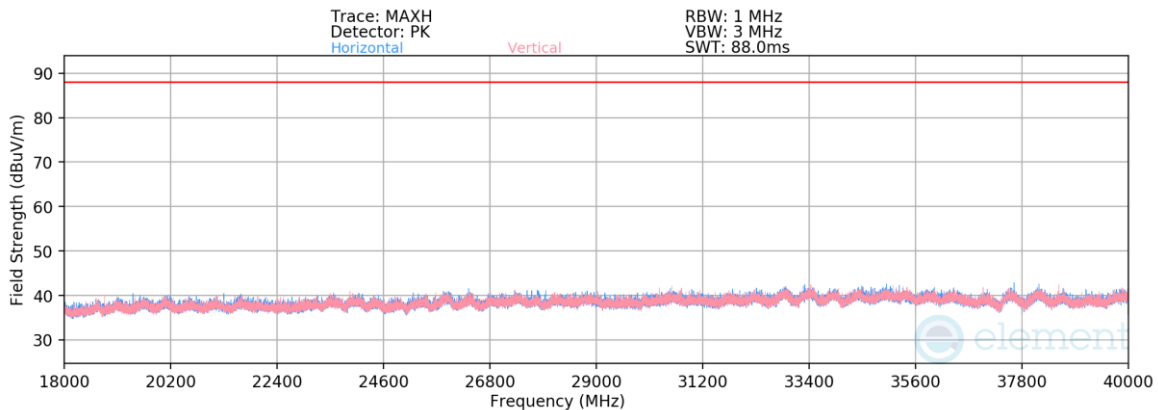


Plot 7-1400. Radiated Spurious Emissions 18-40GHz CDD Diversity (802.11be – Ch. 149 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6695MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 13390.00	Average	H	-	-	-84.81	22.30	0.00	44.49	68.23	-23.74
* 13390.00	Peak	H	-	-	-73.57	22.30	0.00	55.73	88.23	-32.50
* 20085.00	Average	V	-	-	-60.26	-7.97	-9.54	29.22	53.98	-24.76
* 20085.00	Peak	V	-	-	-48.80	-7.97	-9.54	40.69	73.98	-33.29
26780.00	Average	V	-	-	-62.58	-5.10	-9.54	29.77	68.23	-38.46
26780.00	Peak	V	-	-	-51.56	-5.10	-9.54	40.80	88.23	-47.43
33475.00	Average	V	-	-	-61.40	-4.21	-9.54	31.84	68.23	-36.39
33475.00	Peak	V	-	-	-50.19	-4.21	-9.54	43.06	88.23	-45.17

Table 7-235. Radiated Spurious Emission Measurements CDD Diversity – RU26

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 449 of 644

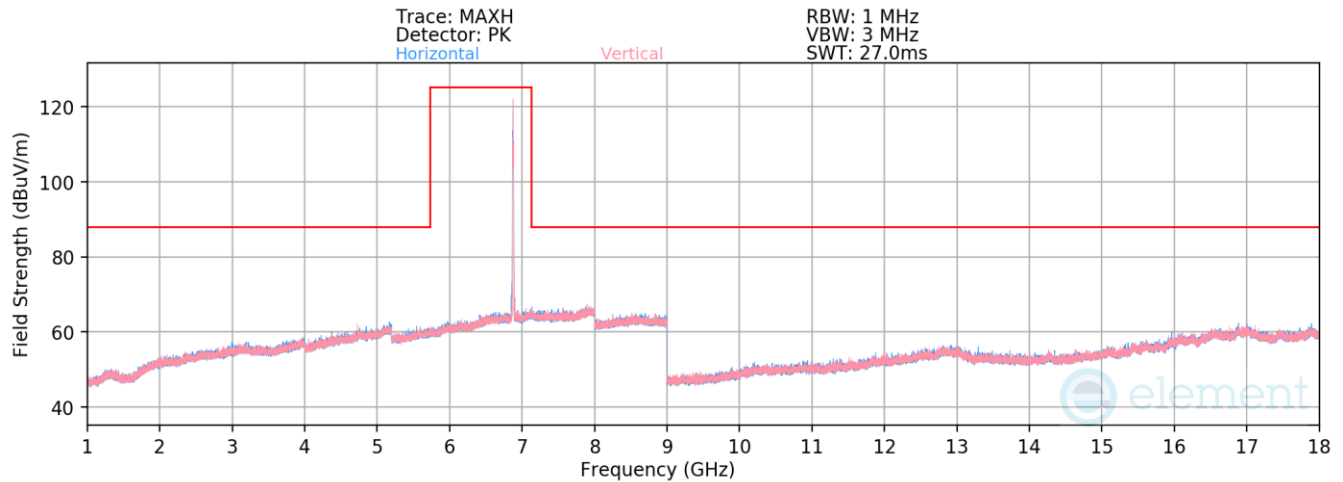

Plot 7-1401. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 185 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6875MHz
Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13750.00	Average	V	-	-	-84.59	21.79	44.19	68.23	-24.04
13750.00	Peak	V	-	-	-72.75	21.79	56.03	88.23	-32.20

Table 7-236. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 450 of 644

V 11.0 05/2025

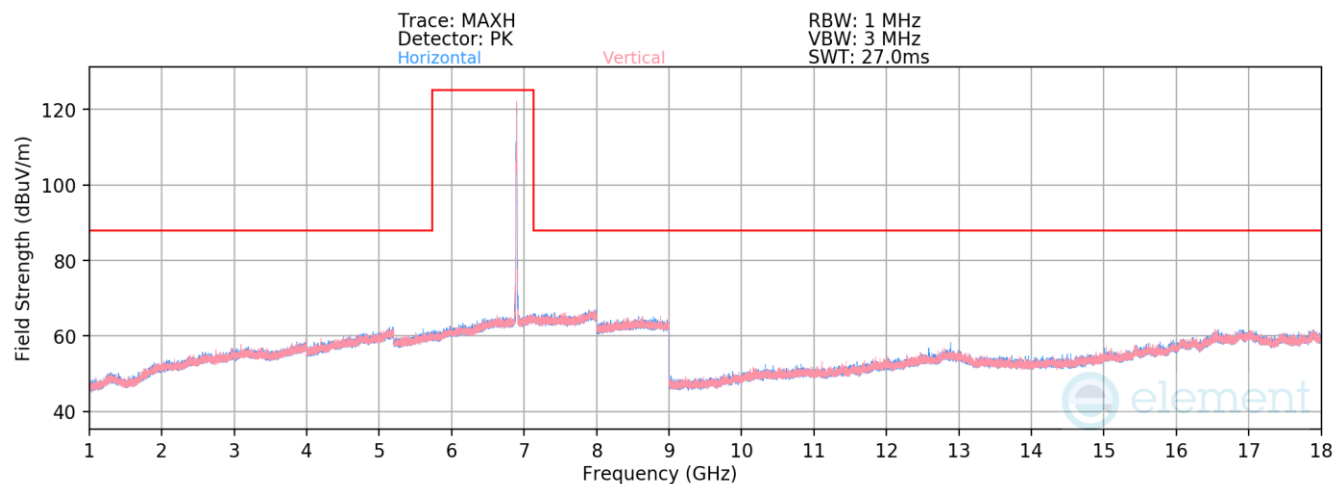

Plot 7-1402. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 189 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895MHz
Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13790.00	Average	V	-	-	-83.20	22.04	45.85	68.23	-22.38
13790.00	Peak	V	-	-	-71.73	22.04	57.31	88.23	-30.92


Table 7-237. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 451 of 644

V 11.0 05/2025

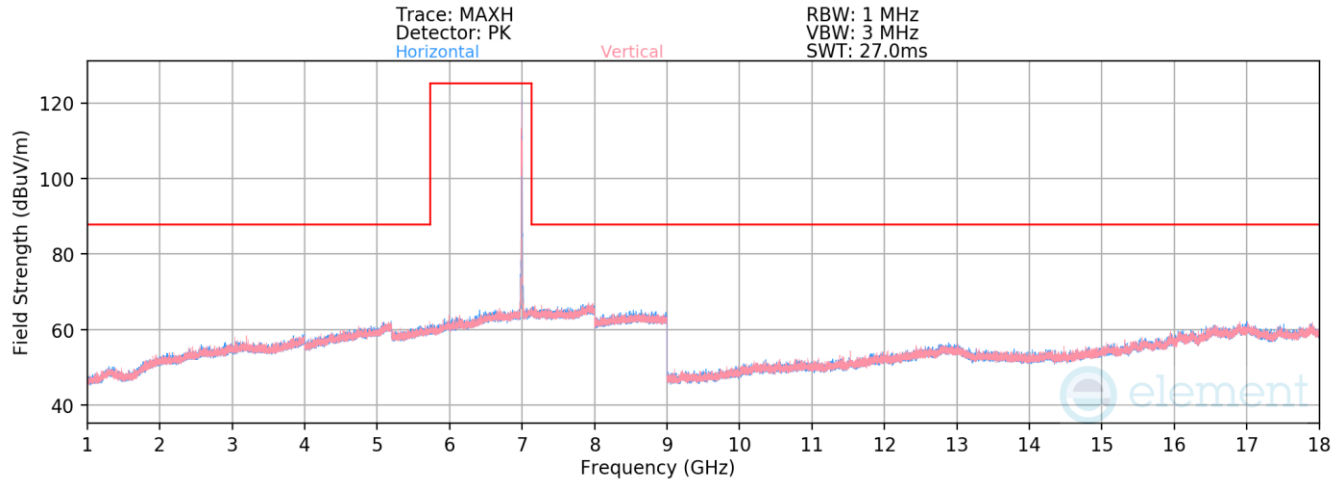

Plot 7-1403. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 209 – RU26)

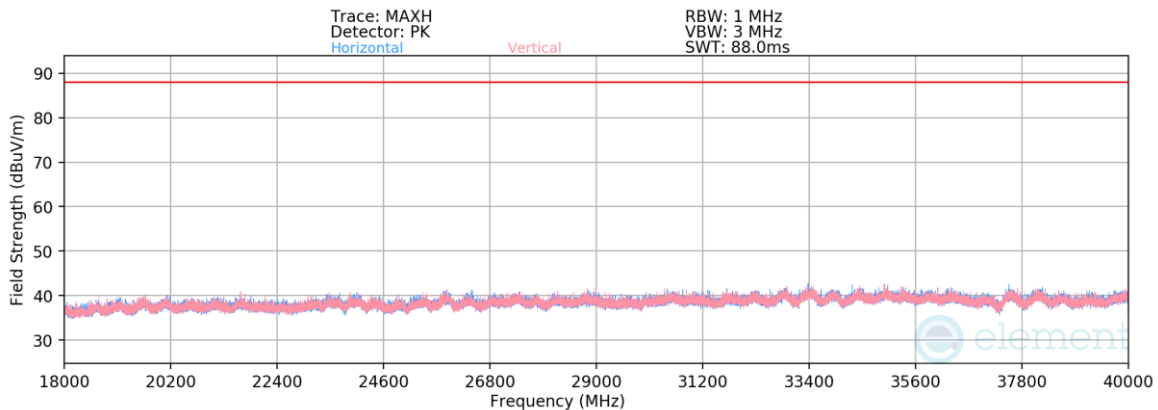

Plot 7-1404. Radiated Spurious Emissions 18-40GHz SDM Diversity (802.11be – Ch. 209 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6995MHz
Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13990.00	Average	V	-	-	-83.55	22.00	0.00	45.45	68.23	-22.78
13990.00	Peak	V	-	-	-72.21	22.00	0.00	56.79	88.23	-31.44
* 20985.00	Average	V	-	-	-61.27	-7.45	-9.54	28.74	53.98	-25.24
* 20985.00	Peak	V	-	-	-50.11	-7.45	-9.54	39.89	73.98	-34.09
27980.00	Average	H	-	-	-63.80	-4.19	-9.54	29.46	68.23	-38.77
27980.00	Peak	H	-	-	-52.49	-4.19	-9.54	40.77	88.23	-47.46
34975.00	Average	V	-	-	-61.48	-4.59	-9.54	31.39	68.23	-36.84
34975.00	Peak	V	-	-	-49.13	-4.59	-9.54	43.74	88.23	-44.49

Table 7-238. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 452 of 644

V 11.0 05/2025

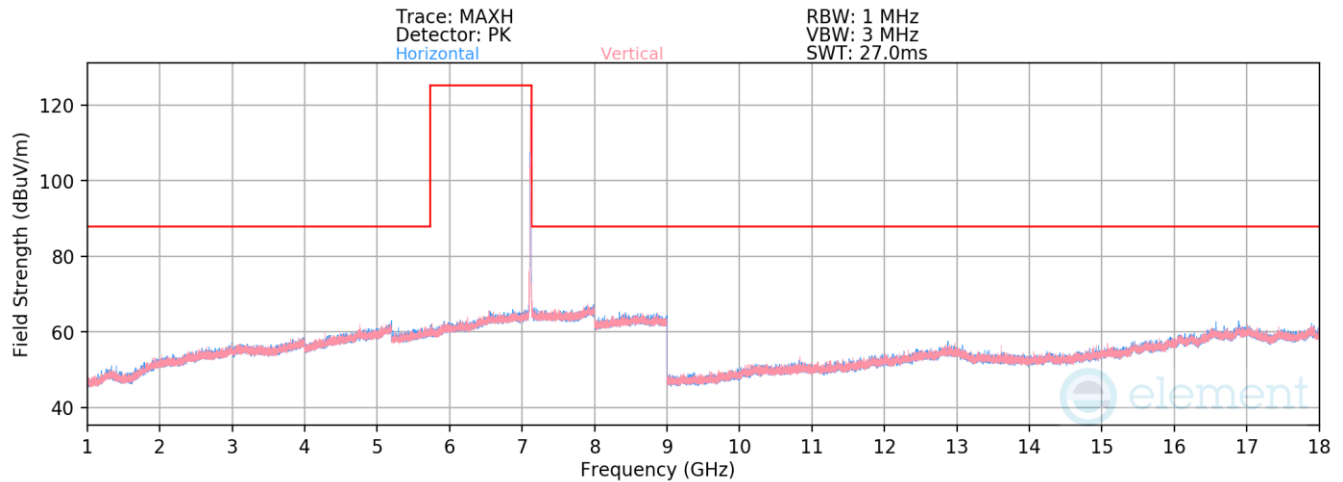

Plot 7-1405. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 229 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
14190.00	Average	V	-	-	-84.95	22.84	44.89	68.23	-23.34
14190.00	Peak	V	-	-	-73.53	22.84	56.31	88.23	-31.92

Table 7-239. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 453 of 644

V 11.0 05/2025

RU242

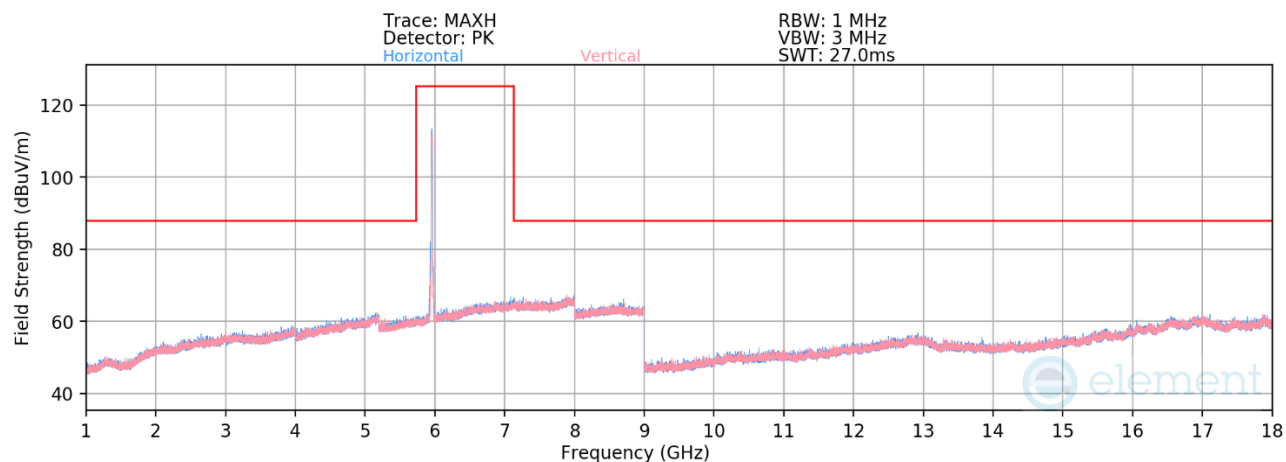

Plot 7-1406. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 1 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11910.00	Average	H	-	-	-83.68	20.31	43.63	53.98	-10.35
* 11910.00	Peak	H	-	-	-72.31	20.31	55.00	73.98	-18.98
* 17865.00	Average	V	-	-	-84.83	25.11	47.28	53.98	-6.70
* 17865.00	Peak	V	-	-	-73.81	25.11	58.30	73.98	-15.68


Table 7-240. Radiated Spurious Emission Measurements CDD Diversity – RU242

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 454 of 644

V 11.0 05/2025

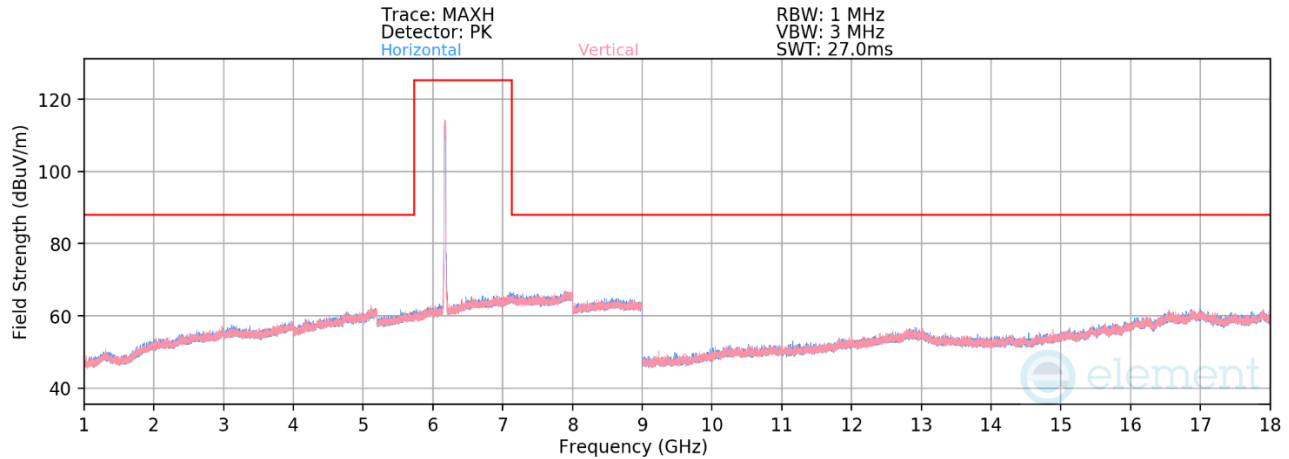

Plot 7-1407. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 45 – RU242)

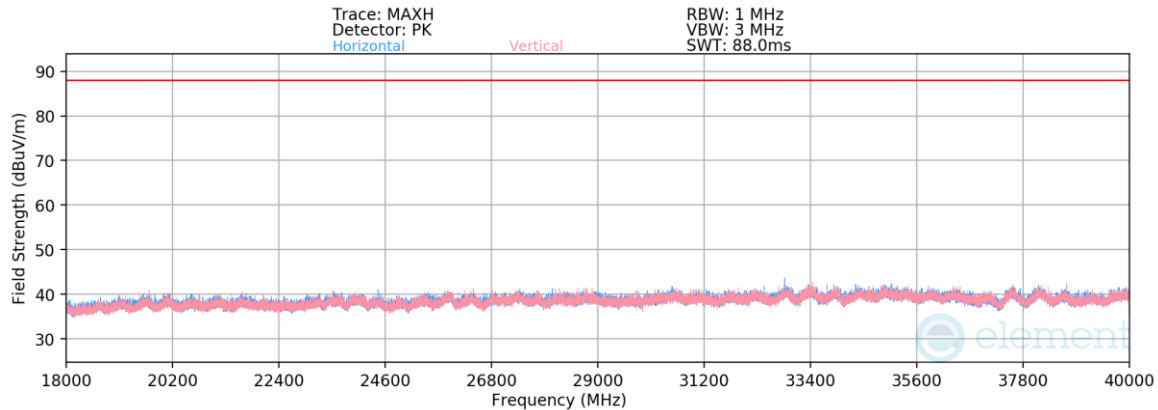

Plot 7-1408. Radiated Spurious Emissions 18-40GHz CDD Diversity (802.11be – Ch. 45 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6175MHz
Channel: 45

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	12350.00	Average	H	-	-	-83.74	20.93	0.00	44.19	53.98	-9.79
*	12350.00	Peak	H	-	-	-72.58	20.93	0.00	55.36	73.98	-18.62
*	18525.00	Average	H	-	-	-61.05	-7.31	-9.54	29.09	53.98	-24.89
*	18525.00	Peak	H	-	-	-49.39	-7.31	-9.54	40.75	73.98	-33.23
	24700.00	Average	H	-	-	-61.80	-6.56	-9.54	29.10	68.23	-39.13
	24700.00	Peak	H	-	-	-50.80	-6.56	-9.54	40.10	88.23	-48.13
	30875.00	Average	H	-	-	-63.78	-3.70	-9.54	29.97	68.23	-38.26
	30875.00	Peak	H	-	-	-51.40	-3.70	-9.54	42.36	88.23	-45.87

Table 7-241. Radiated Spurious Emission Measurements CDD Diversity – RU242

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 455 of 644

V 11.0 05/2025

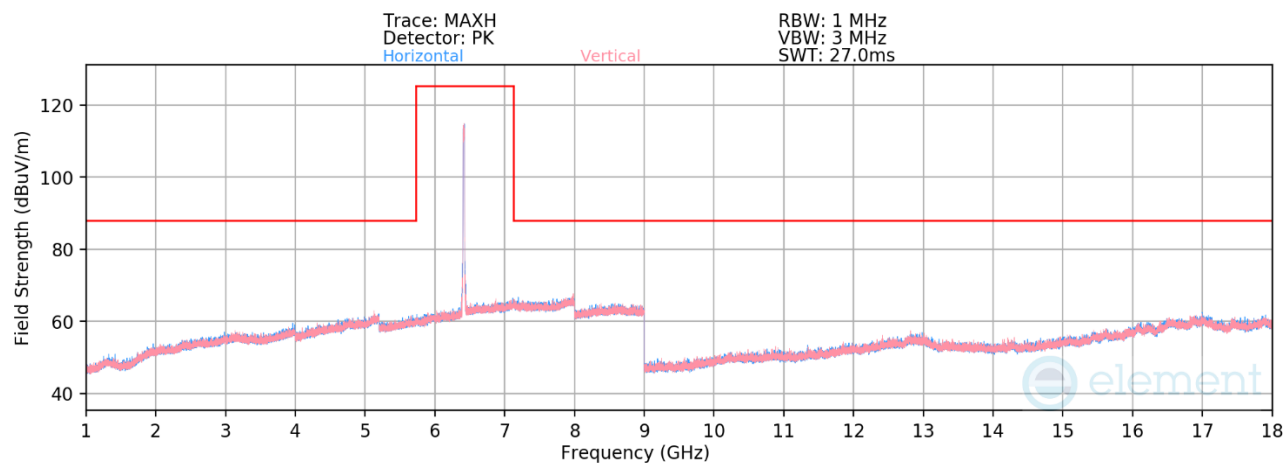

Plot 7-1409. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 93 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12830.00	Average	H	-	-	-84.03	22.10	45.07	68.23	-23.16
12830.00	Peak	H	-	-	-73.02	22.10	56.08	88.23	-32.15

Table 7-242. Radiated Spurious Emission Measurements CDD Diversity – RU242

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 456 of 644

V 11.0 05/2025

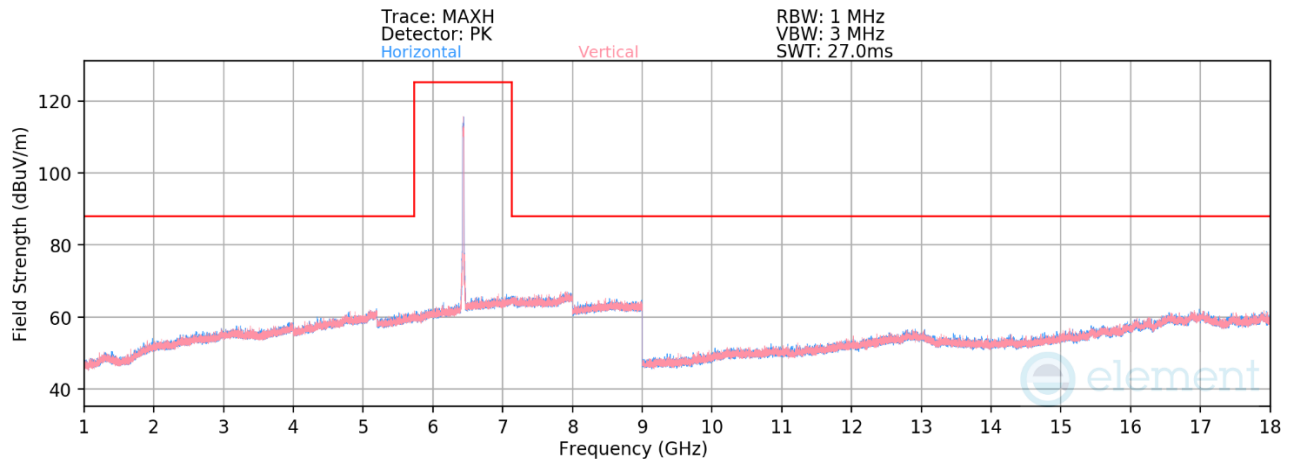

Plot 7-1410. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 97 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435MHz
Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12870.00	Average	H	-	-	-84.65	22.00	44.35	68.23	-23.88
12870.00	Peak	H	-	-	-73.02	22.00	55.98	88.23	-32.25


Table 7-243. Radiated Spurious Emission Measurements CDD Diversity – RU242

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 457 of 644

V 11.0 05/2025

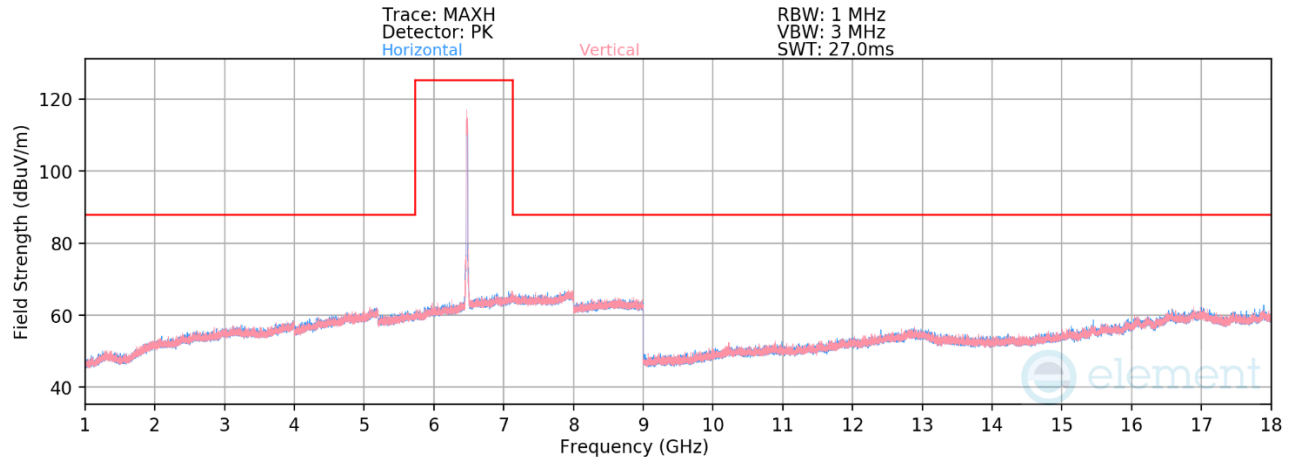

Plot 7-1411. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 105 – RU242)

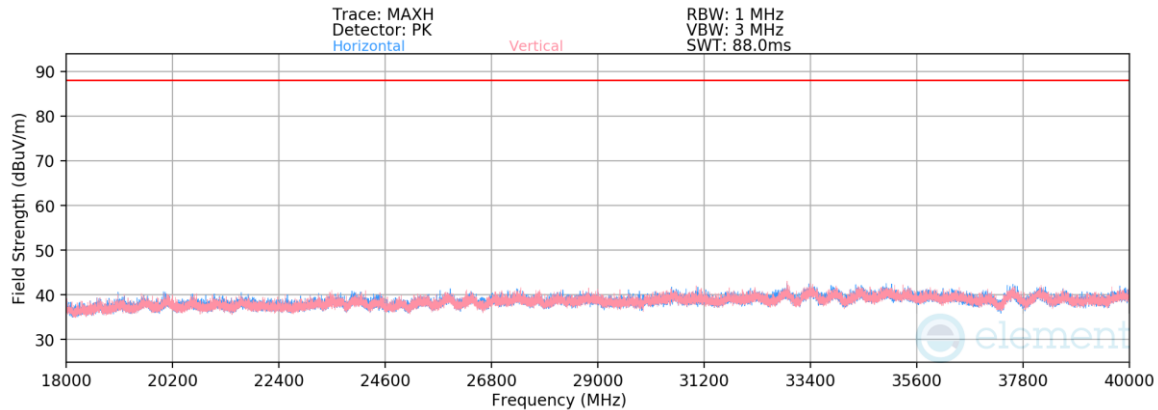


Plot 7-1412. Radiated Spurious Emissions 18-40GHz CDD Diversity (802.11be – Ch. 105 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6475MHz
Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12950.00	Average	V	-	-	-84.91	21.89	0.00	43.98	68.23	-24.25
12950.00	Peak	V	-	-	-72.73	21.89	0.00	56.16	88.23	-32.07
* 19425.00	Average	V	-	-	-61.36	-7.81	-9.54	28.29	53.98	-25.69
* 19425.00	Peak	V	-	-	-49.35	-7.81	-9.54	40.30	73.98	-33.68
25900.00	Average	H	-	-	-61.09	-5.82	-9.54	30.55	68.23	-37.68
25900.00	Peak	H	-	-	-49.23	-5.82	-9.54	42.40	88.23	-45.83
32375.00	Average	H	-	-	-62.65	-3.56	-9.54	31.25	68.23	-36.98
32375.00	Peak	H	-	-	-51.04	-3.56	-9.54	42.86	88.23	-45.37

Table 7-244. Radiated Spurious Emission Measurements CDD Diversity – RU242

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 458 of 644

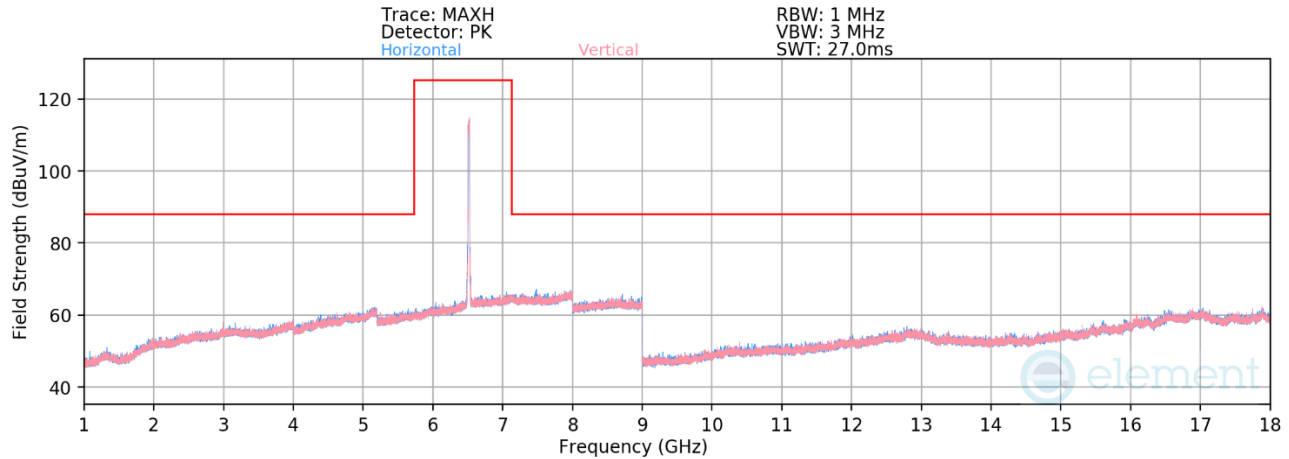

Plot 7-1413. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 113 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6515MHz
Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13030.00	Average	H	-	-	-85.15	22.02	43.87	68.23	-24.36
13030.00	Peak	H	-	-	-73.41	22.02	55.61	88.23	-32.62

Table 7-245. Radiated Spurious Emission Measurements CDD Diversity – RU242

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 459 of 644

V 11.0 05/2025

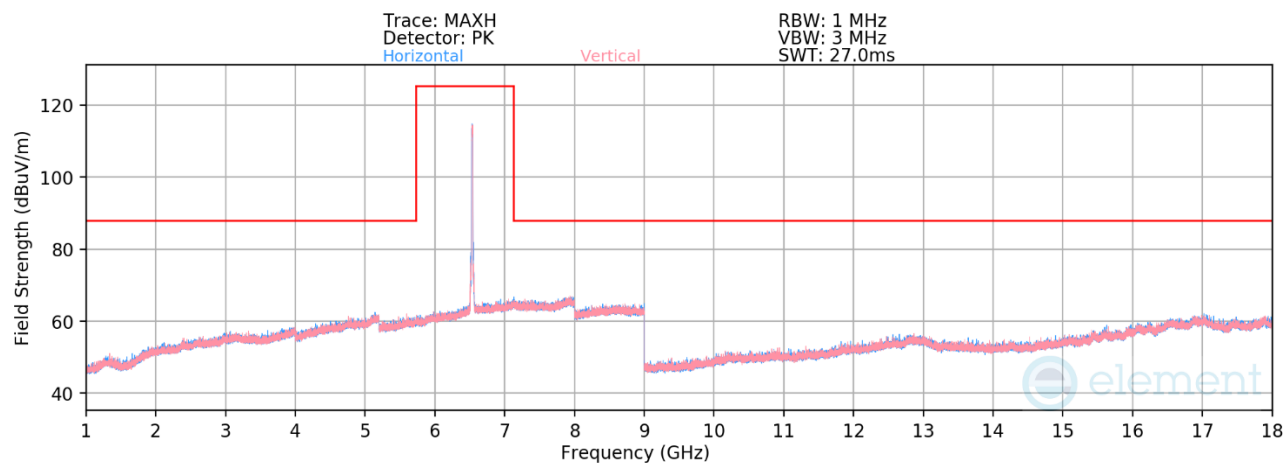

Plot 7-1414. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 117 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535MHz
Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13070.00	Average	V	-	-	-84.70	21.85	44.16	68.23	-24.07
13070.00	Peak	V	-	-	-73.29	21.85	55.56	88.23	-32.67


Table 7-246. Radiated Spurious Emission Measurements CDD Diversity – RU242

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 460 of 644

V 11.0 05/2025

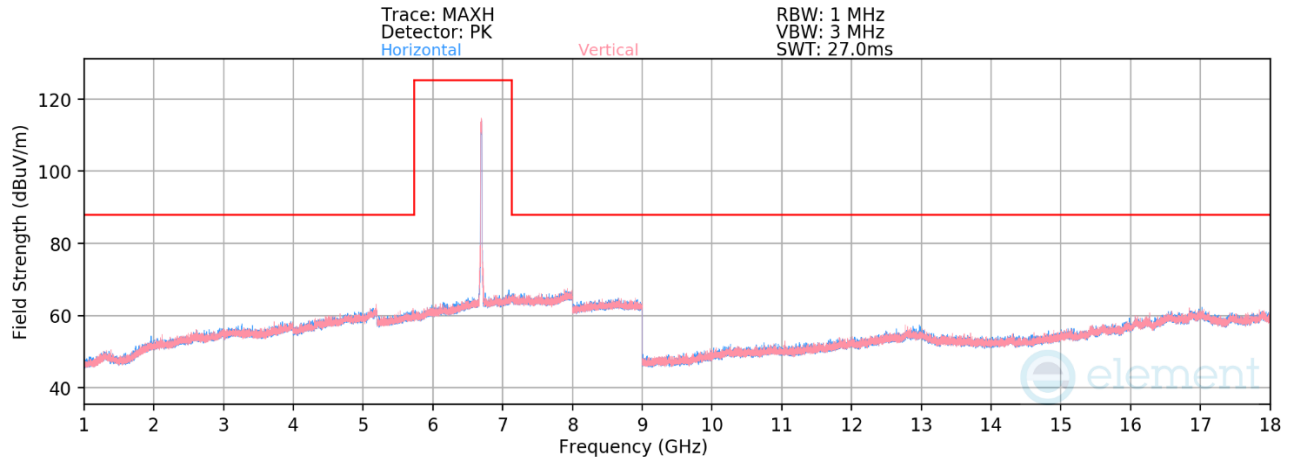

Plot 7-1415. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be – Ch. 149 – RU242)

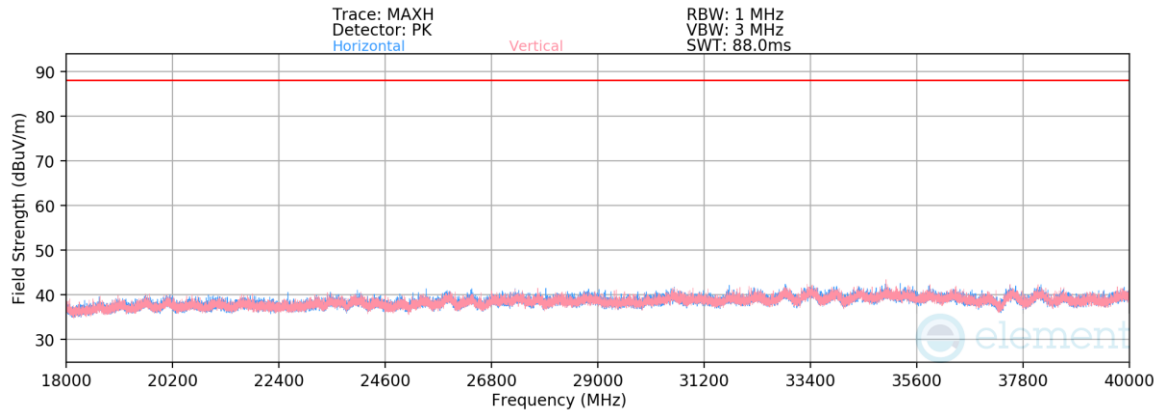

Plot 7-1416. Radiated Spurious Emissions 18-40GHz CDD Diversity (802.11be – Ch. 149 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6695MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 13390.00	Average	H	-	-	-84.68	22.27	0.00	44.60	68.23	-23.63
* 13390.00	Peak	H	-	-	-73.31	22.27	0.00	55.96	88.23	-32.27
* 20085.00	Average	V	-	-	-59.34	-8.00	-9.54	30.12	53.98	-23.86
* 20085.00	Peak	V	-	-	-48.06	-7.97	-9.54	41.43	73.98	-32.55
26780.00	Average	H	-	-	-62.23	-5.23	-9.54	29.99	68.23	-38.24
26780.00	Peak	H	-	-	-51.26	-5.23	-9.54	40.96	88.23	-47.27
33475.00	Average	V	-	-	-61.15	-4.28	-9.54	32.03	68.23	-36.20
33475.00	Peak	V	-	-	-49.83	-4.38	-9.54	43.25	88.23	-44.98

Table 7-247. Radiated Spurious Emission Measurements CDD Diversity – RU242

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 461 of 644

V 11.0 05/2025

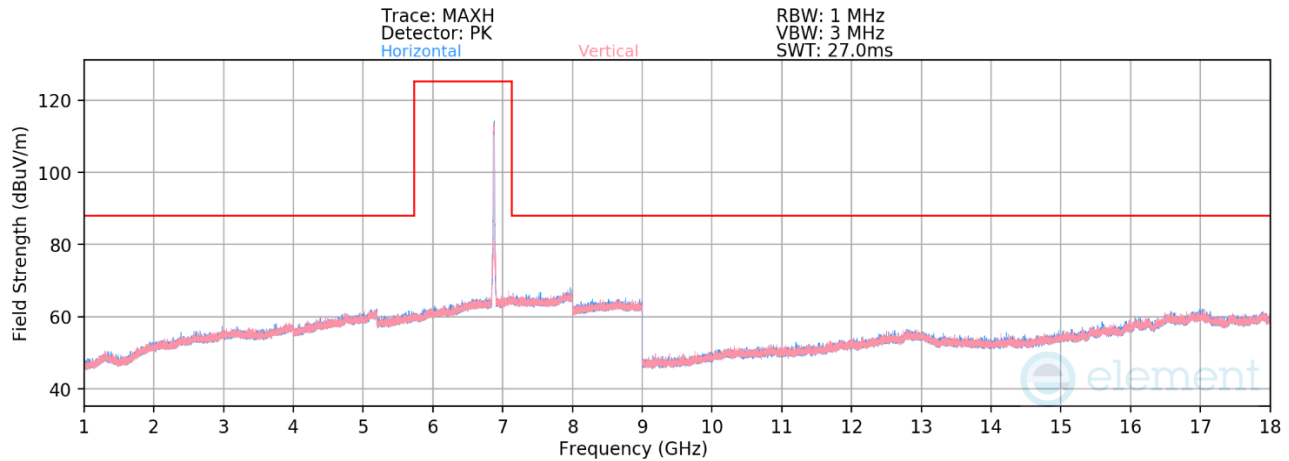

Plot 7-1417. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 185 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6875MHz
Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13750.00	Average	V	-	-	-82.19	21.79	46.59	68.23	-21.64
13750.00	Peak	V	-	-	-70.89	21.79	57.89	88.23	-30.34

Table 7-248. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 462 of 644

V 11.0 05/2025

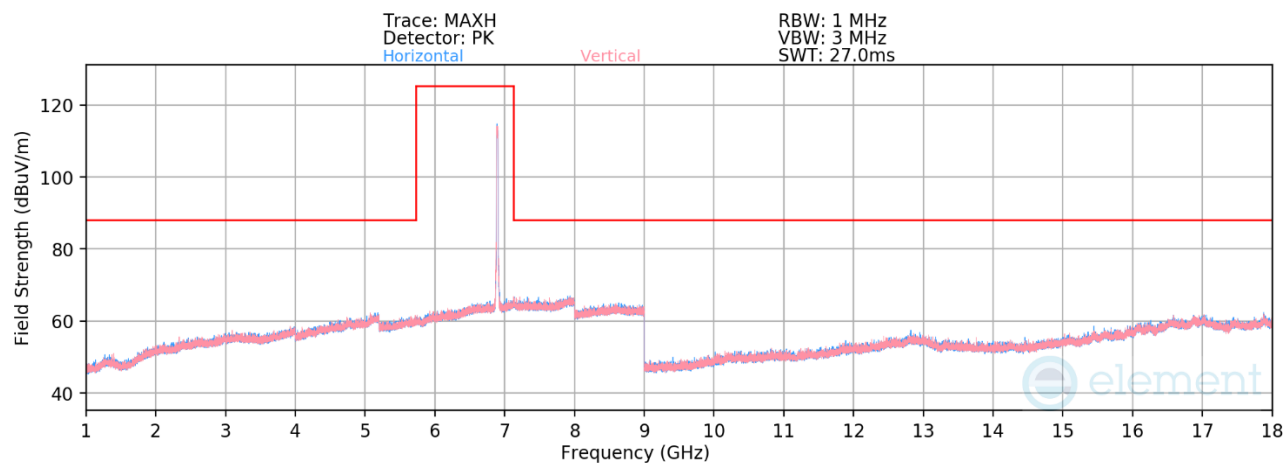

Plot 7-1418. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 189 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895MHz
Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13790.00	Average	V	-	-	-82.94	22.04	46.10	68.23	-22.13
13790.00	Peak	V	-	-	-71.68	22.04	57.36	88.23	-30.87


Table 7-249. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 463 of 644

V 11.0 05/2025

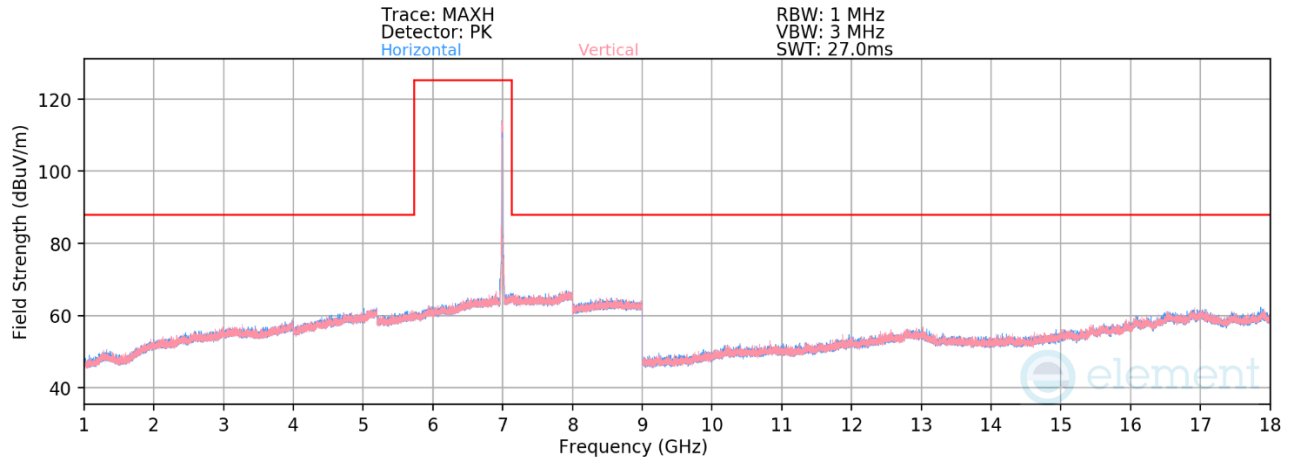

Plot 7-1419. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 209 – RU242)

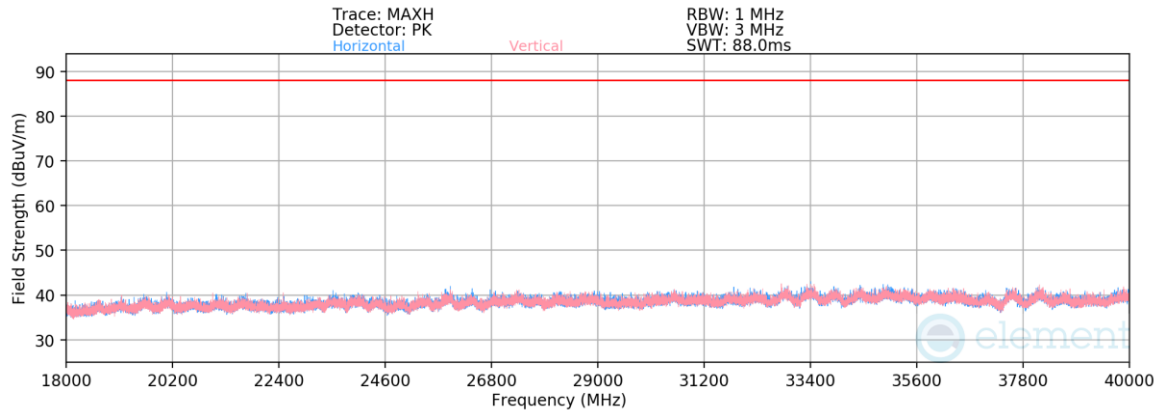

Plot 7-1420. Radiated Spurious Emissions 18-40GHz SDM Diversity (802.11be – Ch. 209 – RU242)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6995MHz
Channel:	209


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13990.00	Average	H	-	-	-83.01	22.02	0.00	46.01	68.23	-22.22
13990.00	Peak	H	-	-	-71.90	22.02	0.00	57.12	88.23	-31.11
* 20985.00	Average	H	-	-	-61.10	-7.45	-9.54	28.91	53.98	-25.07
* 20985.00	Peak	H	-	-	-50.07	-7.58	-9.54	39.82	73.98	-34.16
27980.00	Average	V	-	-	-63.15	-4.29	-9.54	30.01	68.23	-38.22
27980.00	Peak	V	-	-	-51.88	-4.29	-9.54	41.28	88.23	-46.95
34975.00	Average	V	-	-	-60.83	-4.53	-9.54	32.09	68.23	-36.14
34975.00	Peak	V	-	-	-49.35	-4.53	-9.54	43.58	88.23	-44.65

Table 7-250. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 464 of 644

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

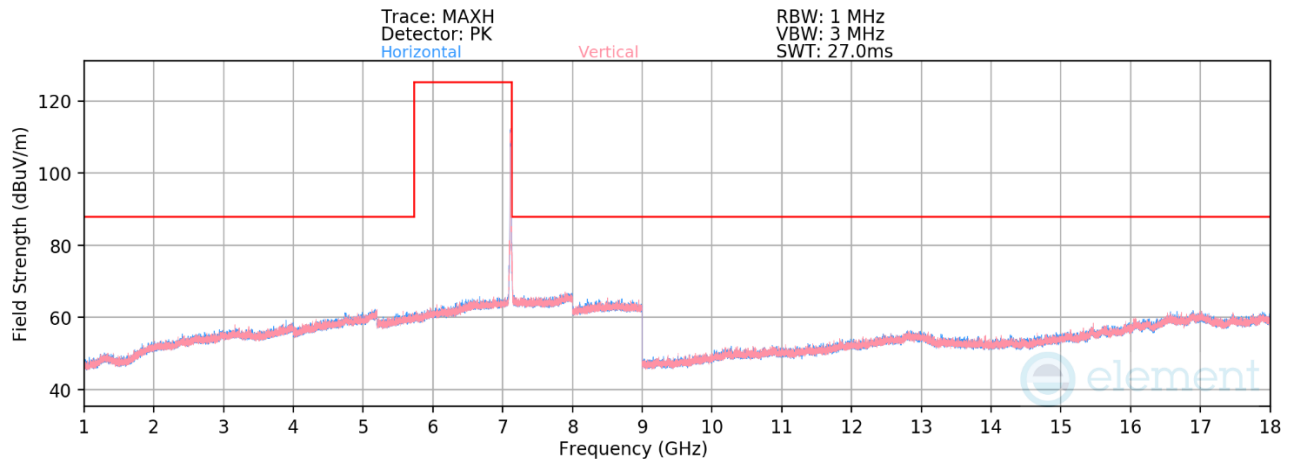

Plot 7-1421. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11be – Ch. 233 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 7115MHz
Channel: 233

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
14230.00	Average	V	-	-	-84.08	22.67	45.59	68.23	-22.64
14230.00	Peak	V	-	-	-72.88	22.67	56.79	88.23	-31.44

Table 7-251. Radiated Spurious Emission Measurements SDM Diversity – RU242


FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 465 of 644

V 11.0 05/2025

7.7.3 Antenna 5T Radiated Band Edge Measurements (20MHz BW)


RU26

Mode: 802.11be OFDMA
 Transfer Rate: MCS11
 RU Index: 0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5955MHz
 Channel: 1

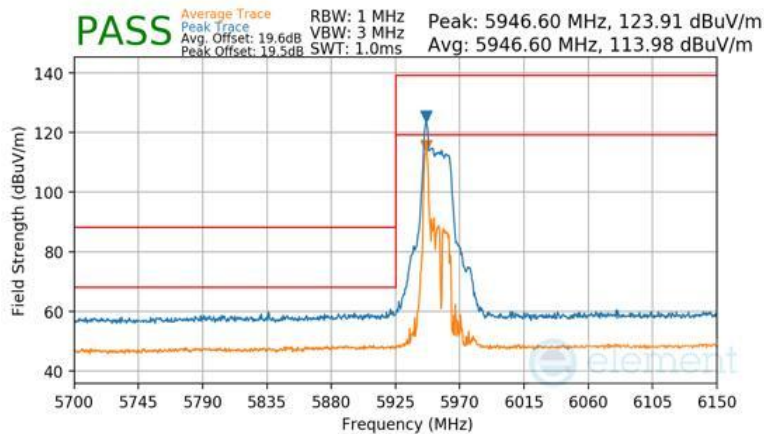

Plot 7-1422 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26

Mode: 802.11be OFDMA
 Transfer Rate: MCS11
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5955MHz
 Channel: 1

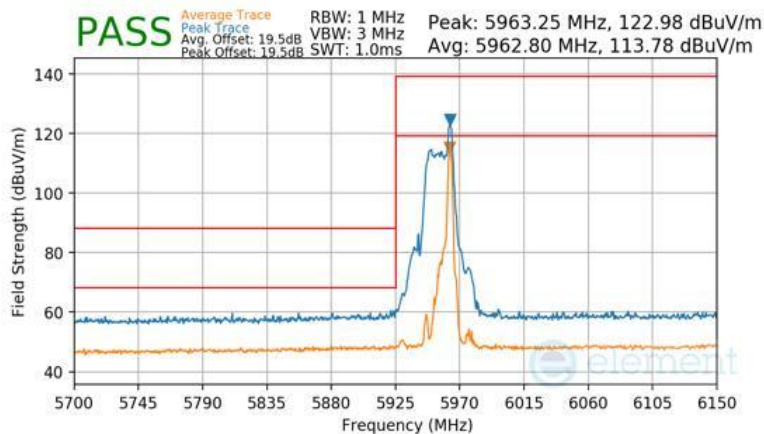


Plot 7-1423 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 466 of 644


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229

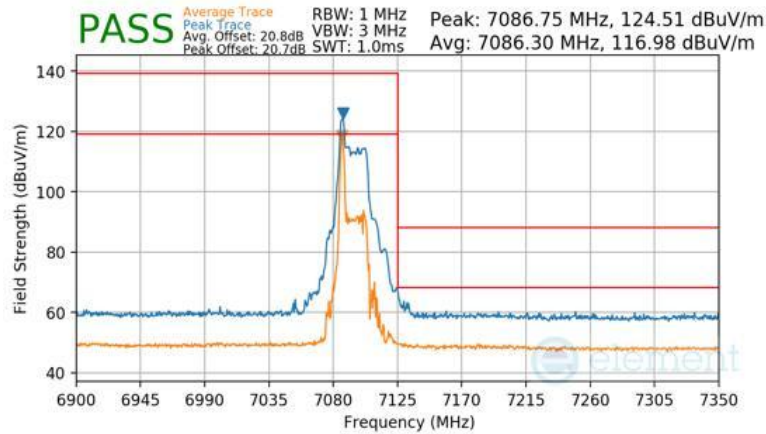

Plot 7-1424 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 8
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229

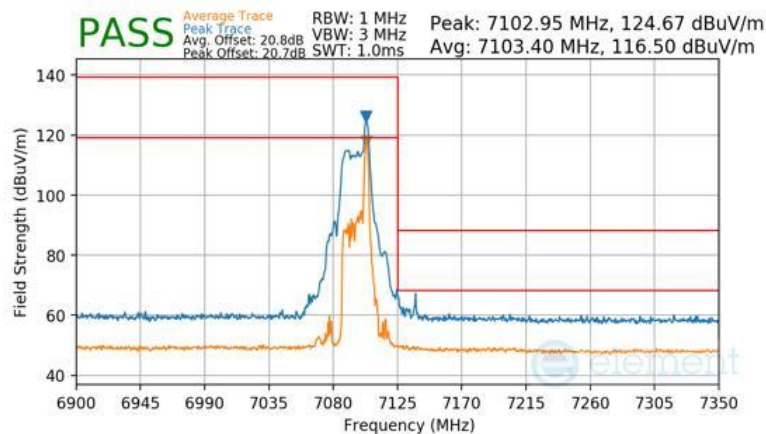


Plot 7-1425 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG			Page 467 of 644

V 11.0 05/2025


MRU

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 70
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1

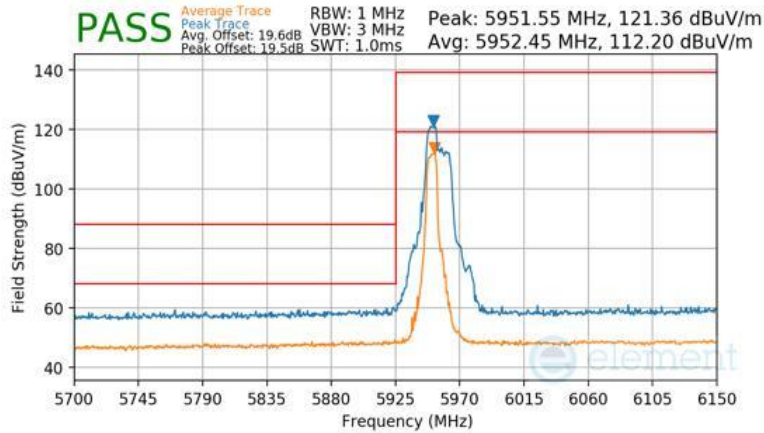

Plot 7-1426 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU52+26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1

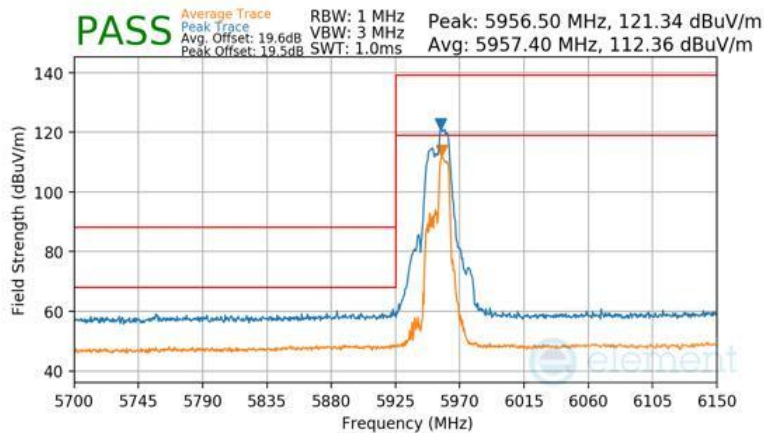


Plot 7-1427 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU52+26

FCC ID: BCGA3462 IC: 579C-A3462			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 468 of 644	

V 11.0 05/2025


RU242

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1

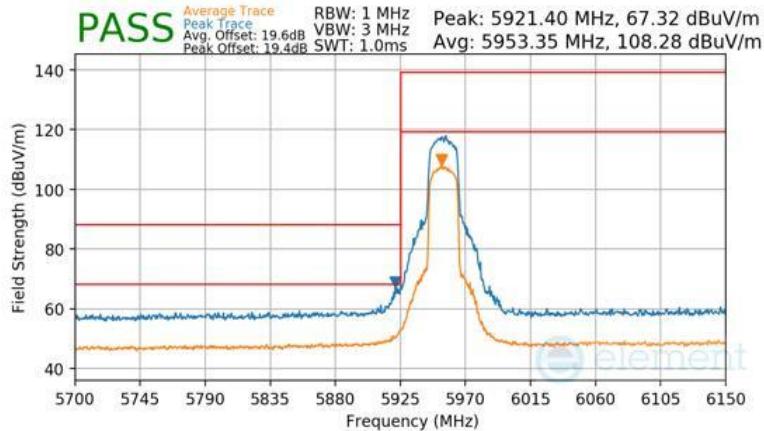

Plot 7-1430 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU242

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229

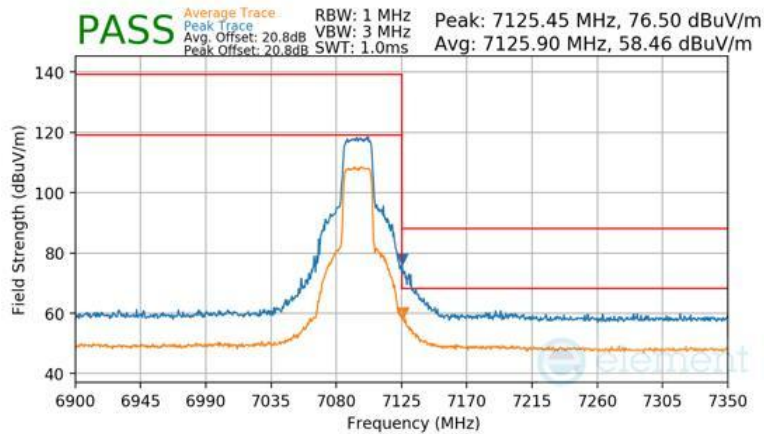


Plot 7-1431 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU242


FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 470 of 644

V 11.0 05/2025

Mode:	802.11be OFDMA
Transfer Rate:	MCS11
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	7115MHz
Channel:	233

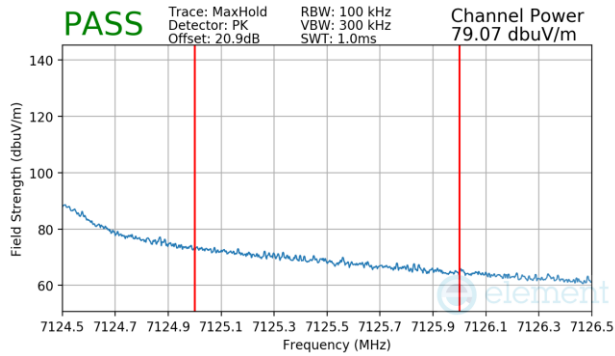

Plot 7-1432 Antenna 5T Radiated Upper Band Edge (Peak – UNII Band 8) – RU242

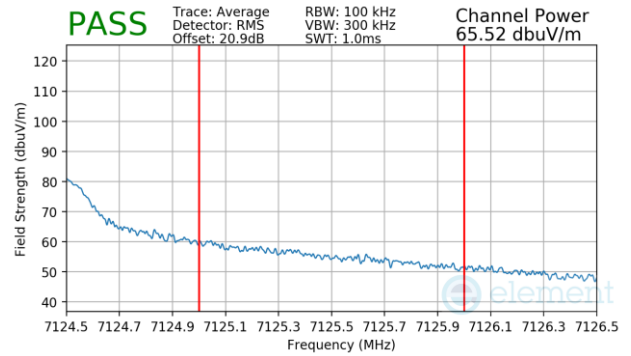


Plot 7-1433 Antenna 5T Radiated Upper Band Edge (Average – UNII Band 8) – RU242

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 471 of 644

7.7.4 Antenna 5T Radiated Band Edge Measurements (40MHz BW)


RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 5965MHz
Channel: 3

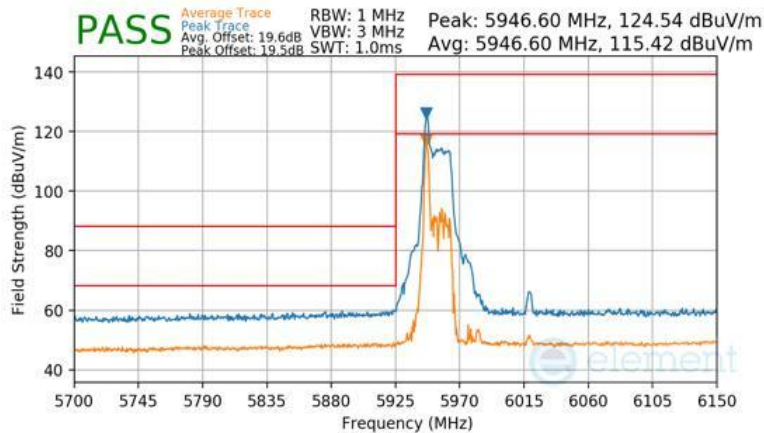

Plot 7-1434 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 17
Distance of Measurements: 3 Meters
Operating Frequency: 5965MHz
Channel: 3

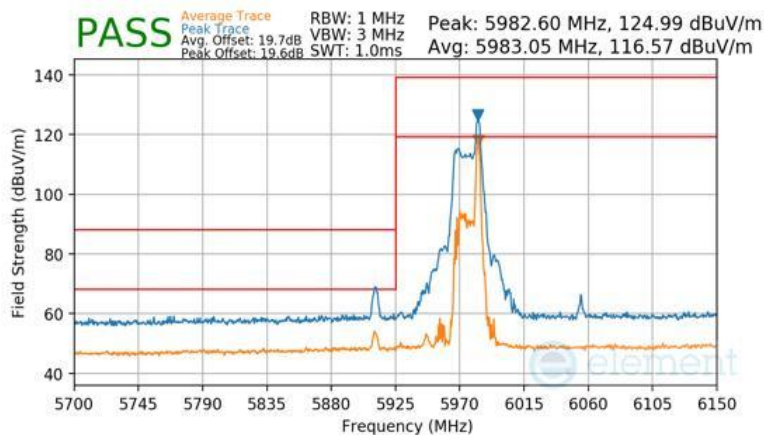


Plot 7-1435 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 472 of 644


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 7085MHz
Channel: 227

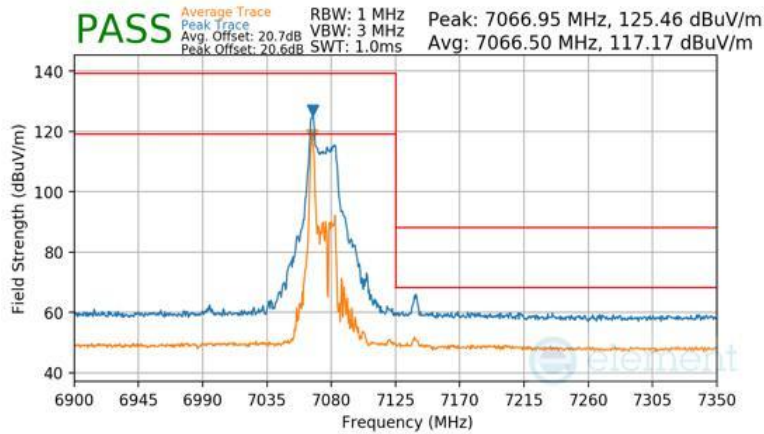

Plot 7-1436 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 17
Distance of Measurements: 3 Meters
Operating Frequency: 7085MHz
Channel: 227

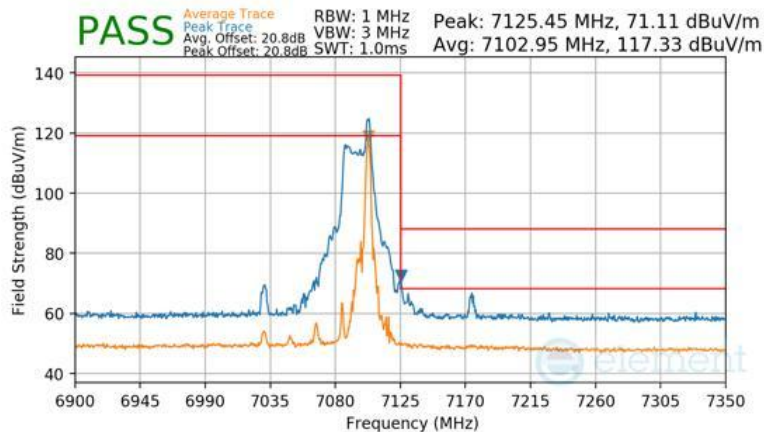


Plot 7-1437 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 473 of 644


RU484

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 65
Distance of Measurements: 3 Meters
Operating Frequency: 5965MHz
Channel: 3

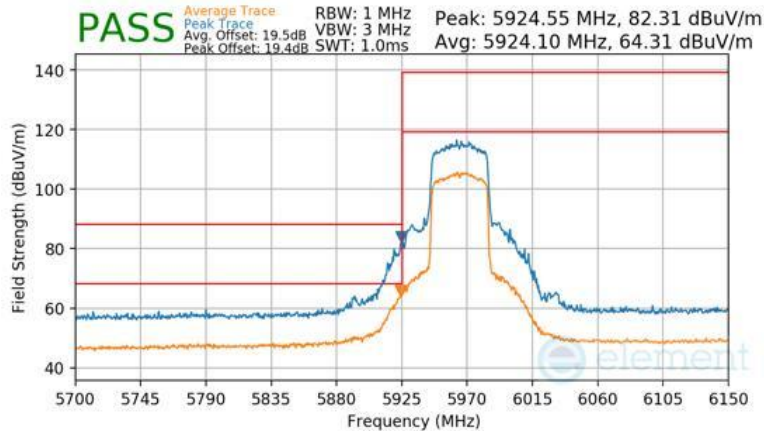

Plot 7-1438 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU484

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 65
Distance of Measurements: 3 Meters
Operating Frequency: 7085MHz
Channel: 227

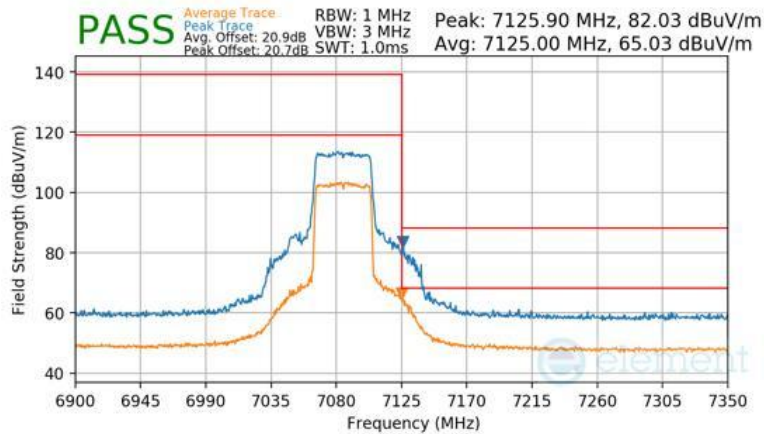

Plot 7-1439 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484


FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 474 of 644

V 11.0 05/2025

7.7.5 Antenna 5T Radiated Band Edge Measurements (80MHz BW)


RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 5985MHz
Channel: 7

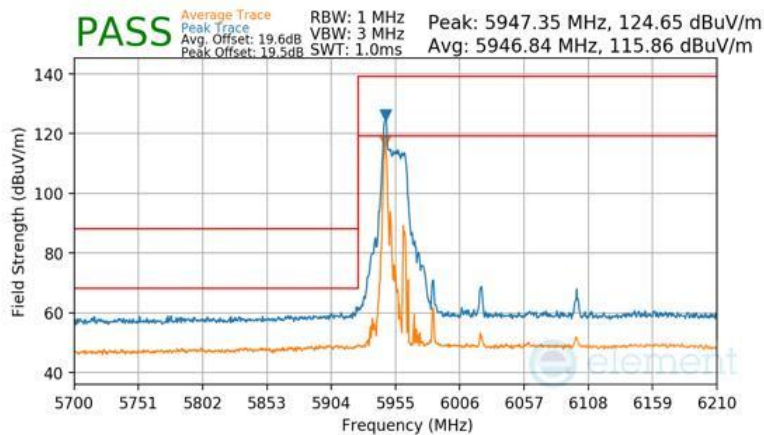

Plot 7-1440 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 36
Distance of Measurements: 3 Meters
Operating Frequency: 5985MHz
Channel: 7

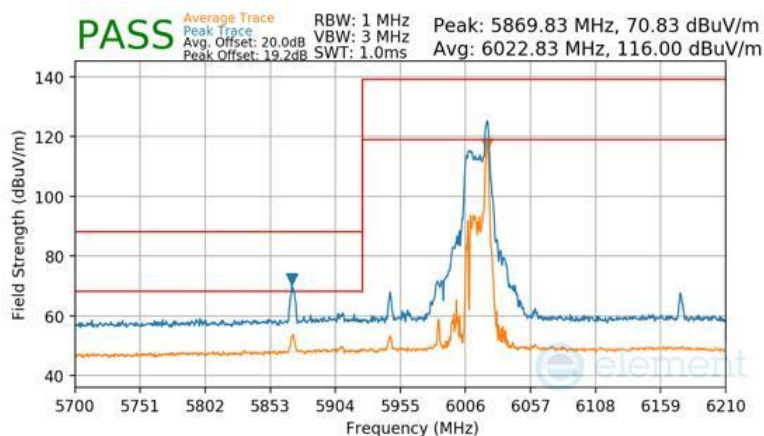


Plot 7-1441 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 475 of 644

V 11.0 05/2025


MRU

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 90
Distance of Measurements: 3 Meters
Operating Frequency: 5985MHz
Channel: 7

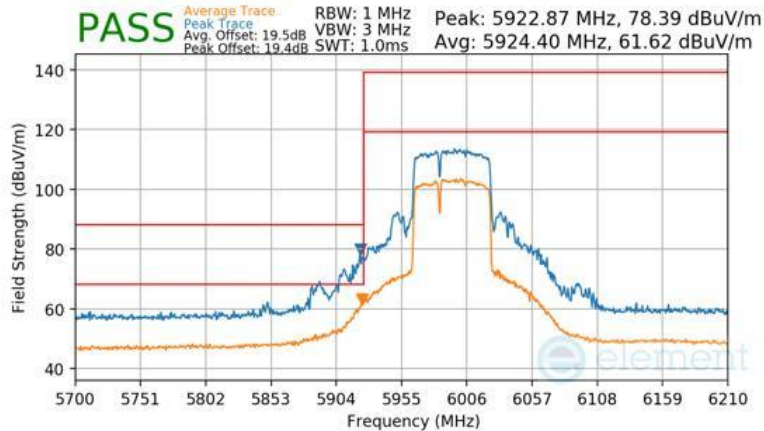

Plot 7-1444 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU484+242

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 91
Distance of Measurements: 3 Meters
Operating Frequency: 5985MHz
Channel: 7

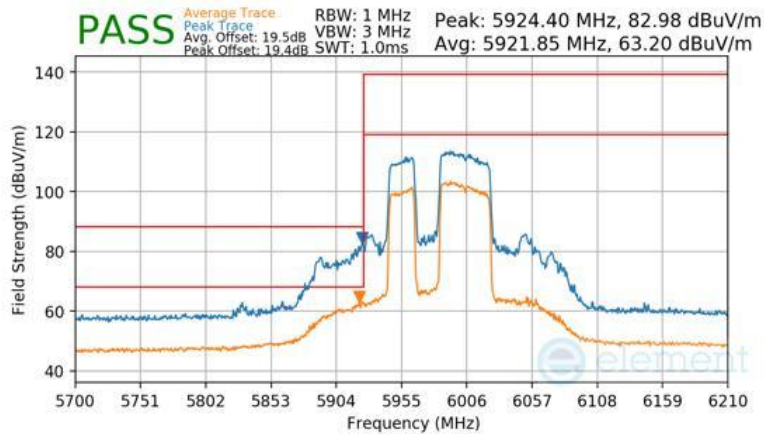


Plot 7-1445 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU484+242

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 477 of 644


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 92
Distance of Measurements: 3 Meters
Operating Frequency: 5985MHz
Channel: 7

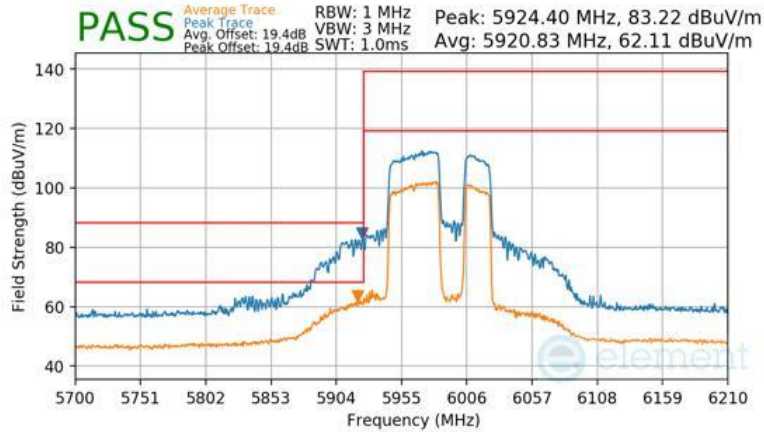

Plot 7-1446 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU484+242


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 93
Distance of Measurements: 3 Meters
Operating Frequency: 5985MHz
Channel: 7

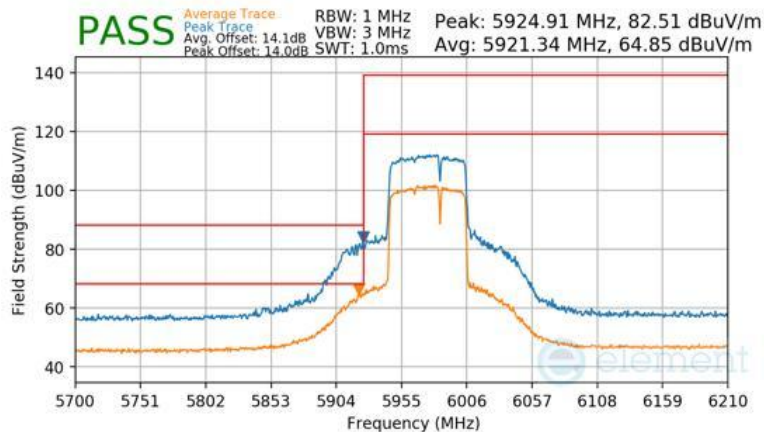

Plot 7-1447 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU484+242


FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 478 of 644

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 90
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

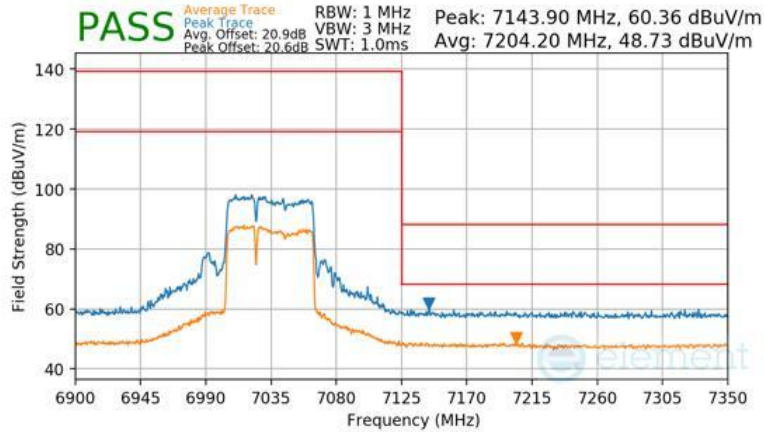

Plot 7-1448 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484+242

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 91
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

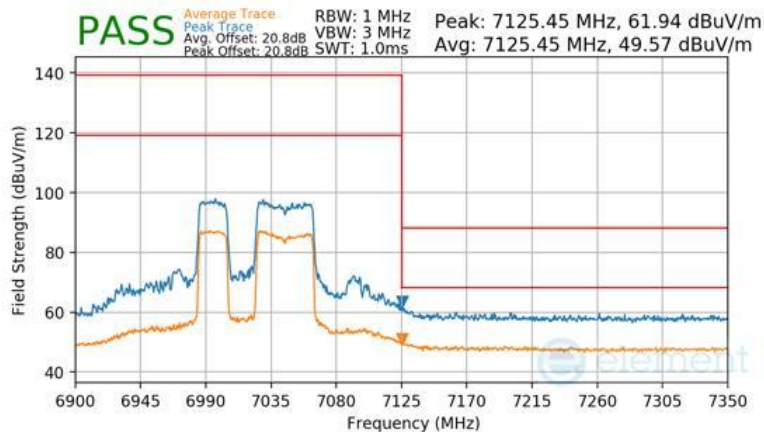


Plot 7-1449 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484+242

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 479 of 644


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 92
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

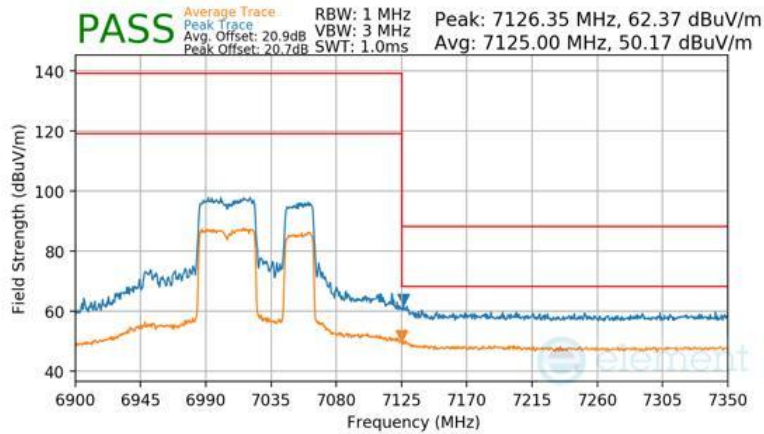

Plot 7-1450 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484+242

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 93
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

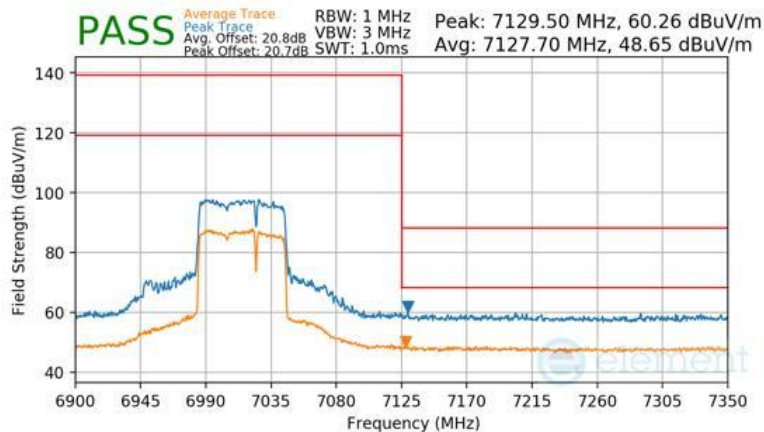


Plot 7-1451 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484+242

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 480 of 644

V 11.0 05/2025


RU996

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 67
Distance of Measurements: 3 Meters
Operating Frequency: 5985MHz
Channel: 7

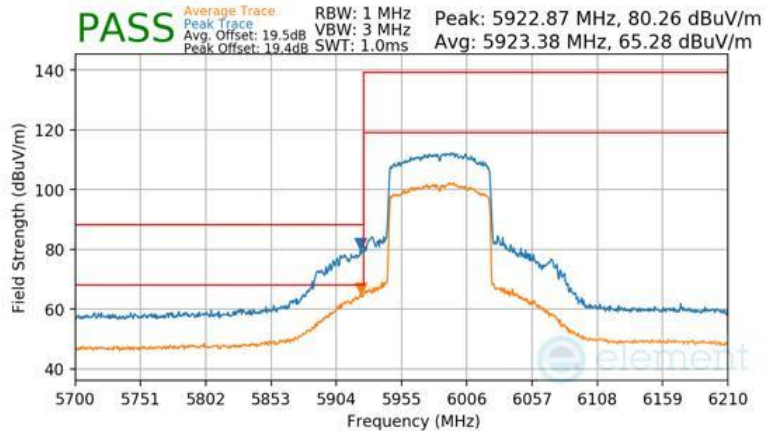

Plot 7-1452 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 67
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

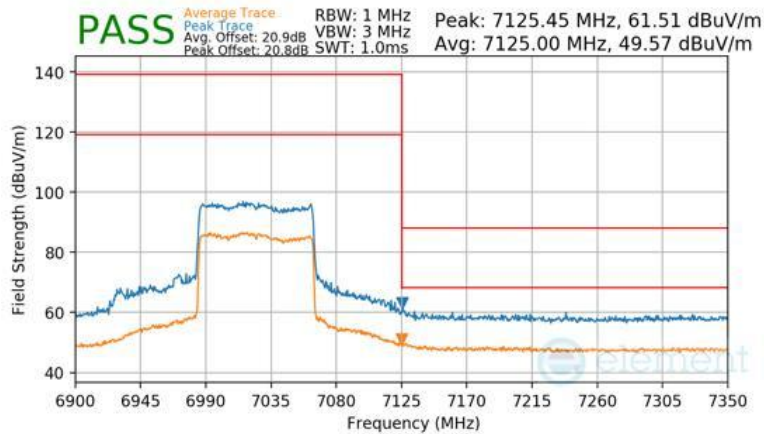

Plot 7-1453 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996


FCC ID: BCGA3462 IC: 579C-A3462			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 481 of 644	

V 11.0 05/2025

7.7.6 Antenna 5T Radiated Band Edge Measurements (160MHz BW)


RU26

Mode: 802.11be OFDMA
 Transfer Rate: MCS11
 RU Index: 0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6025MHz
 Channel: 15

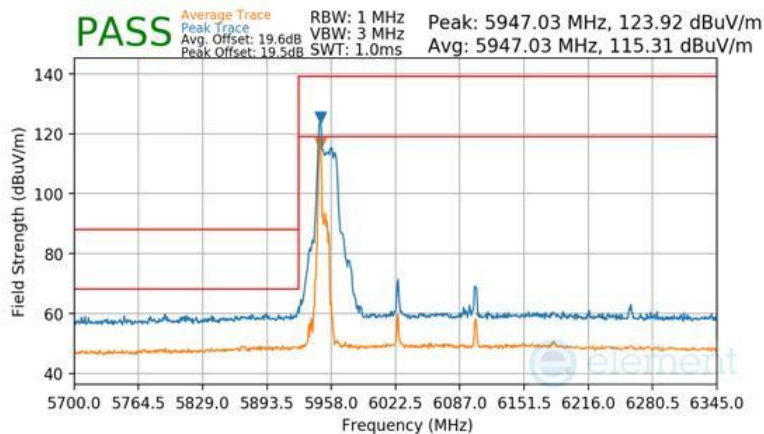

Plot 7-1454 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26 (L)

Mode: 802.11be OFDMA
 Transfer Rate: MCS11
 RU Index: 36
 Distance of Measurements: 3 Meters
 Operating Frequency: 6025MHz
 Channel: 15

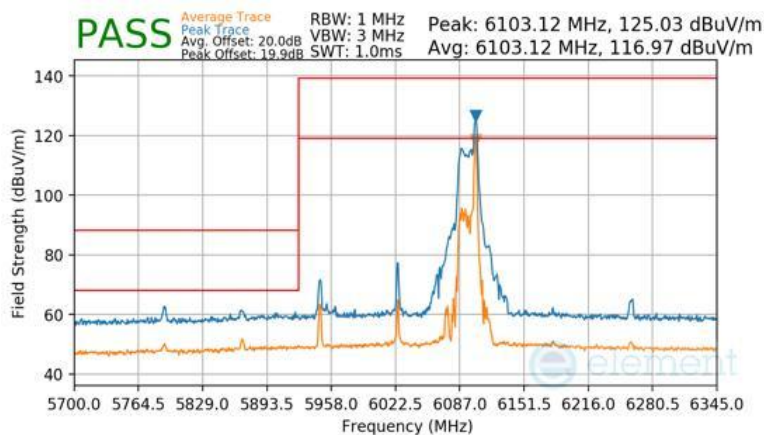


Plot 7-1455 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26 (H)

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 482 of 644

V 11.0 05/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

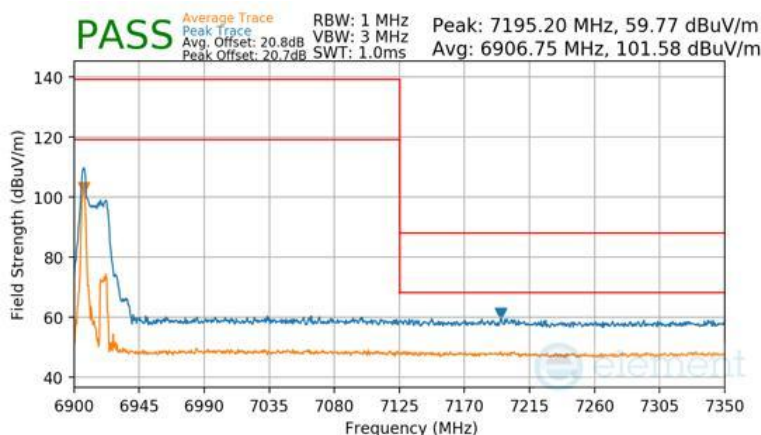

Plot 7-1456 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 36
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

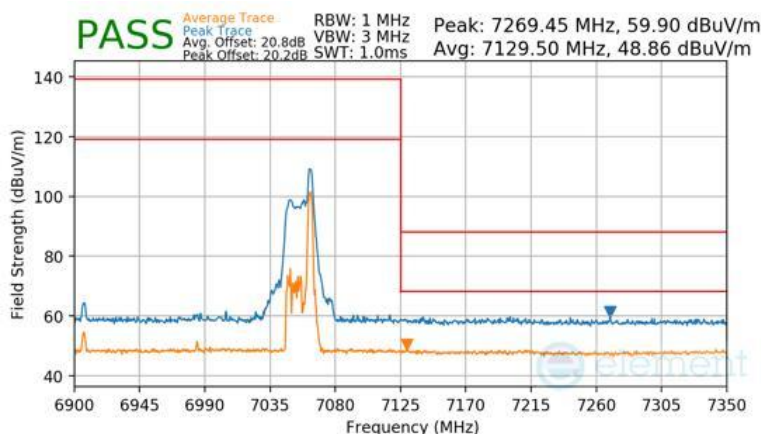


Plot 7-1457 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26 (H)

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG			Page 483 of 644

V 11.0 05/2025


MRU

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 94
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

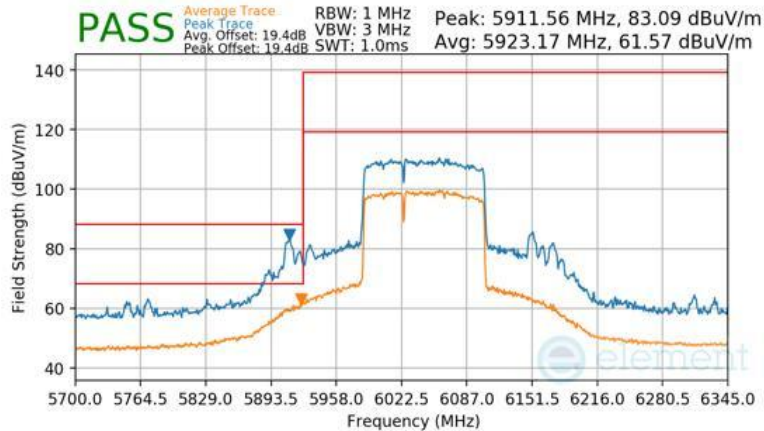

Plot 7-1458 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 94
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

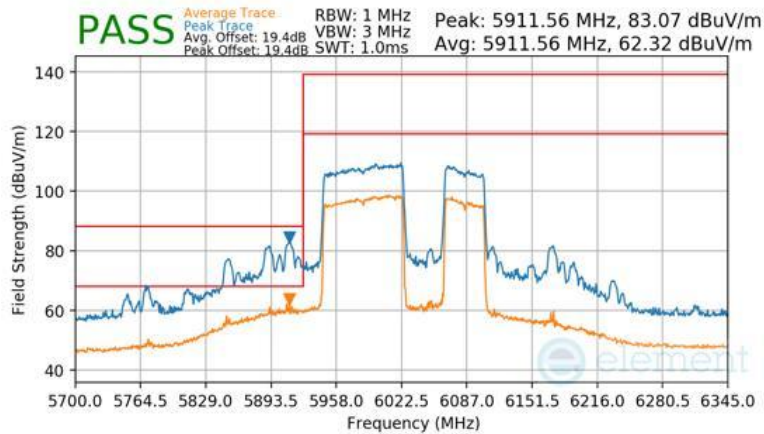


Plot 7-1459 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484 (H)

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 484 of 644


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

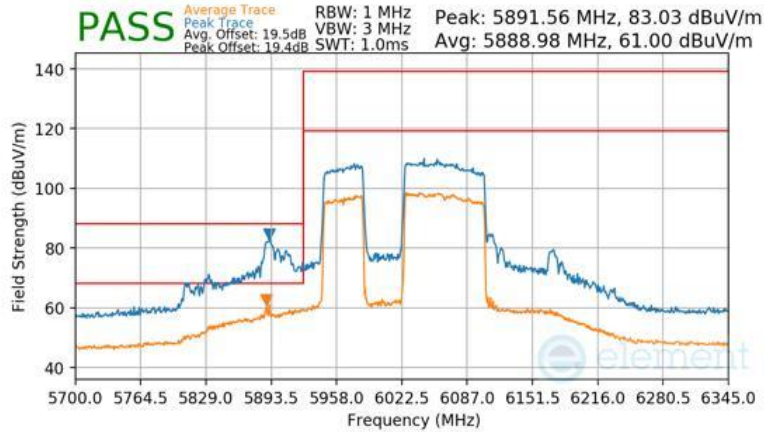

Plot 7-1460 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

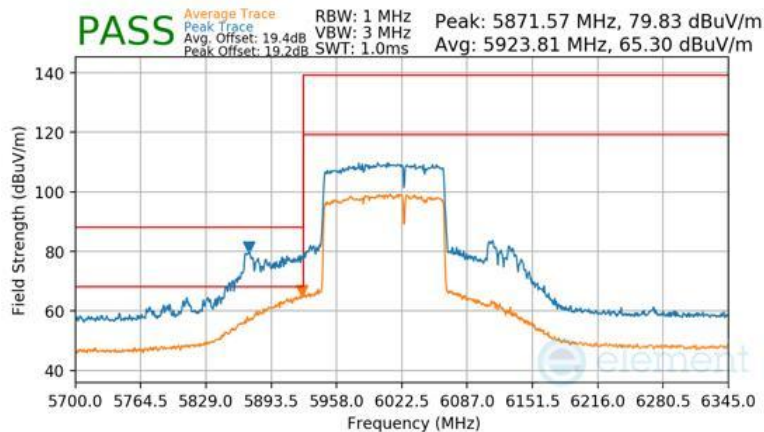

Plot 7-1461 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484 (H)


FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 485 of 644

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 94
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

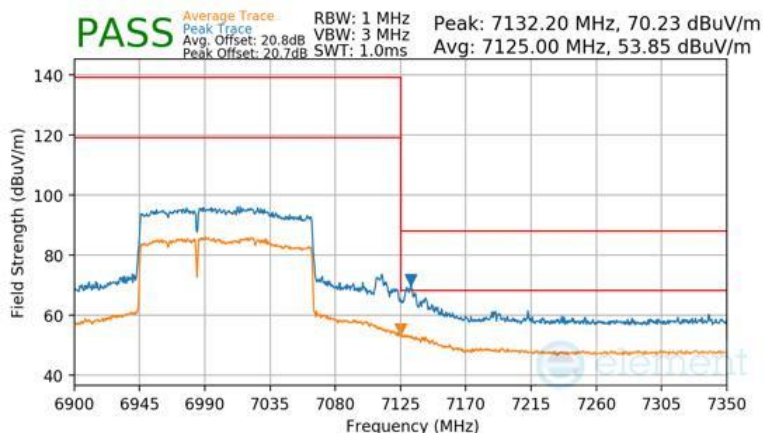

Plot 7-1462 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 94
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

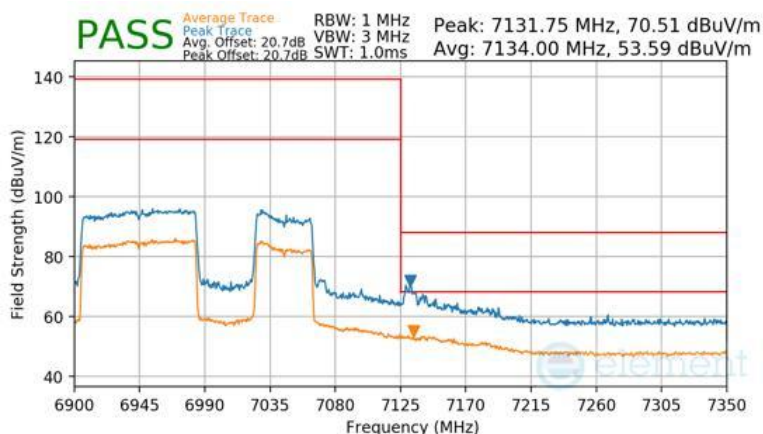


Plot 7-1463 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (H)

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG			Page 486 of 644


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

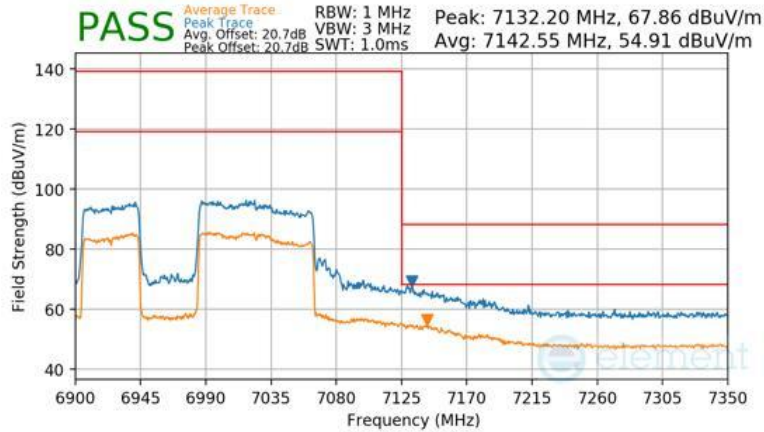

Plot 7-1464 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

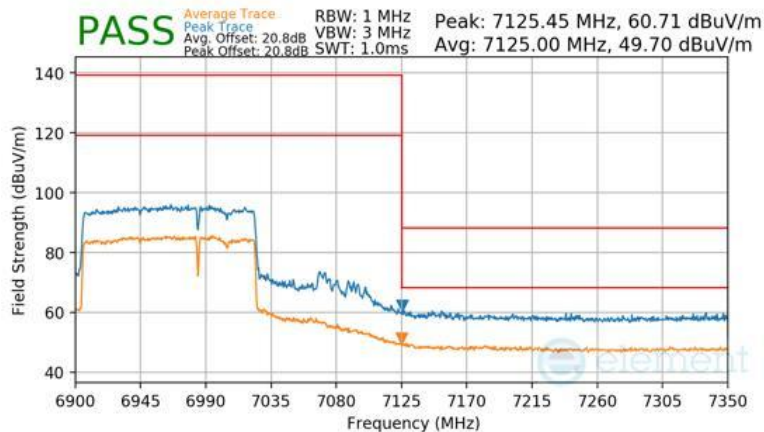

Plot 7-1465 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (H)


FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 487 of 644

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

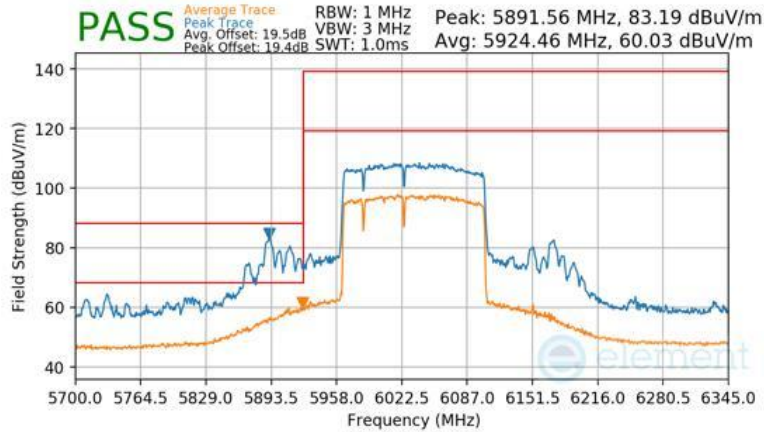

Plot 7-1466 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

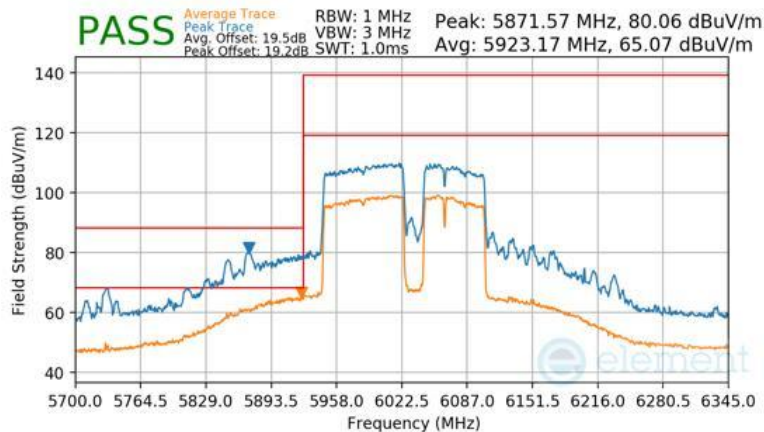


Plot 7-1467 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG			Page 488 of 644


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

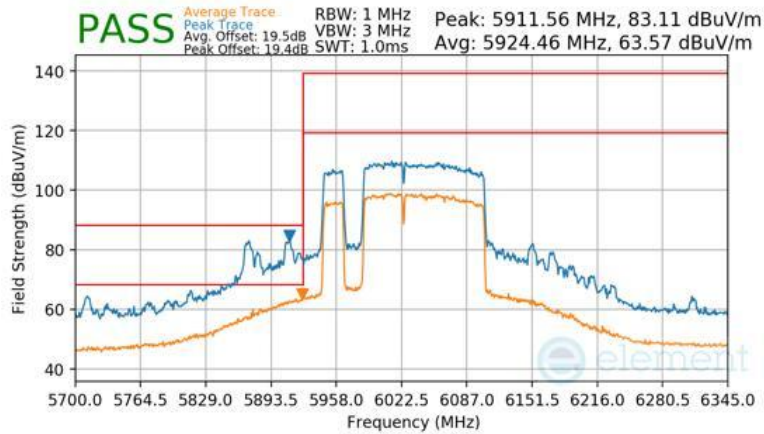

Plot 7-1468 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

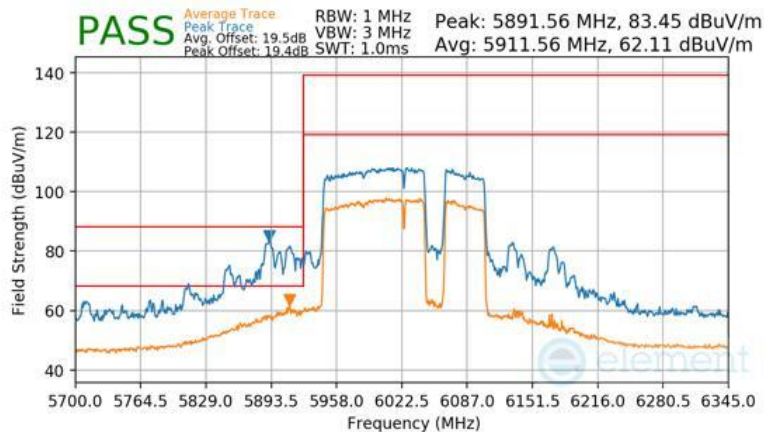


Plot 7-1469 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG			Page 489 of 644


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

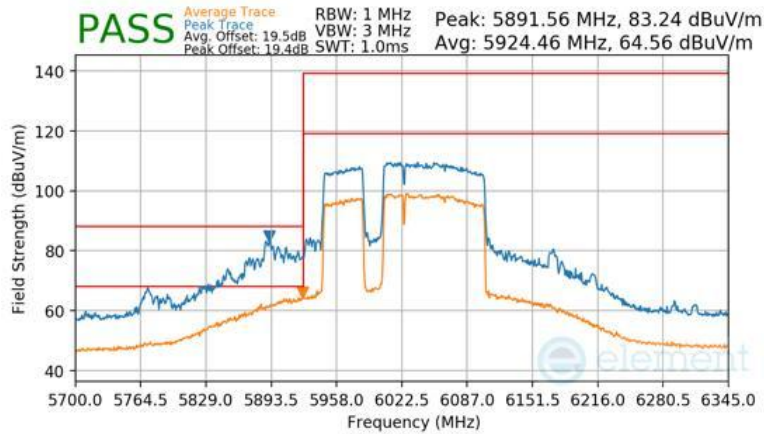

Plot 7-1470 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

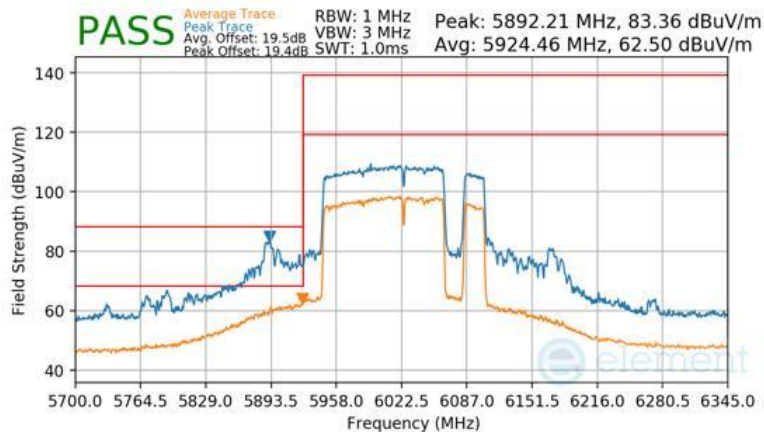

Plot 7-1471 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)


FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 490 of 644

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

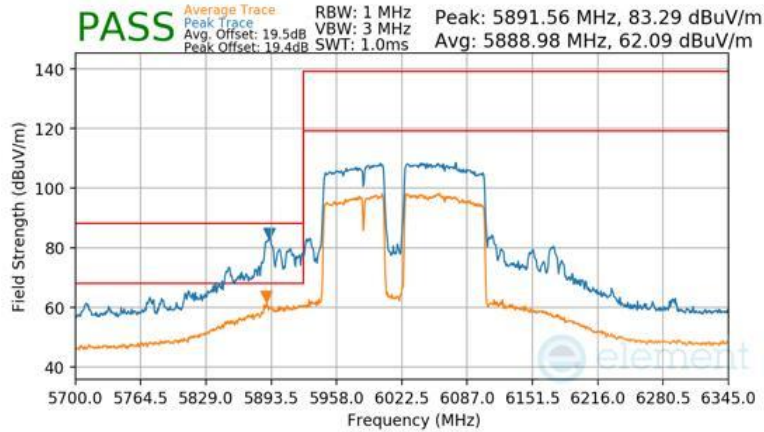

Plot 7-1472 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

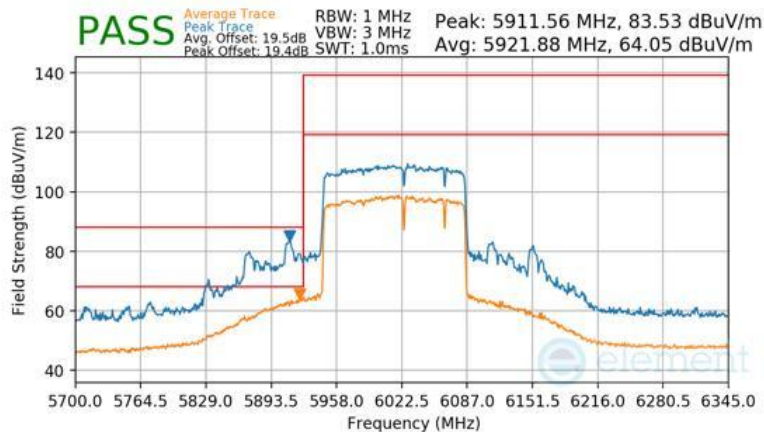


Plot 7-1473 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 491 of 644

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

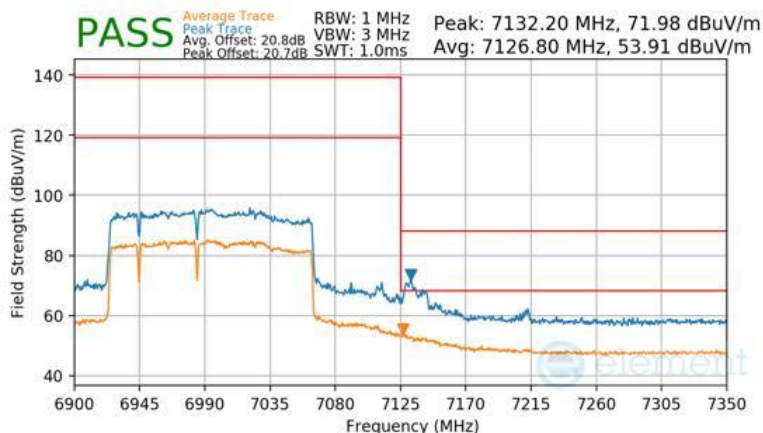


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

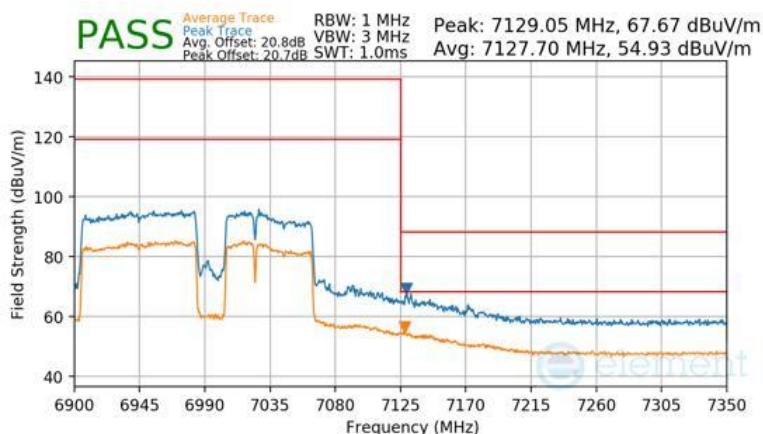

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 492 of 644


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

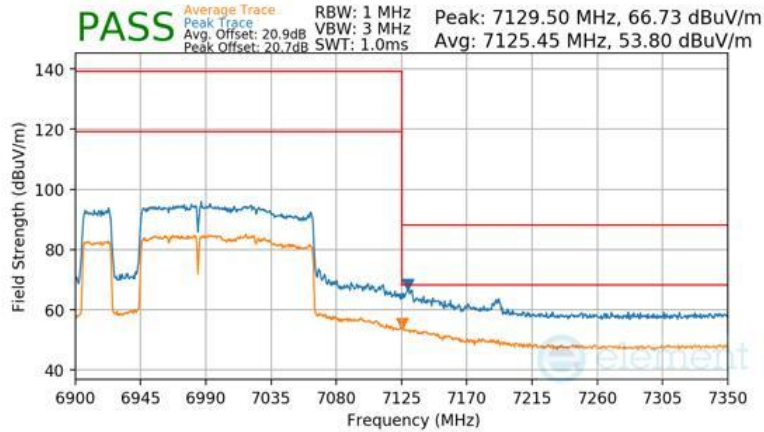

Plot 7-1476 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

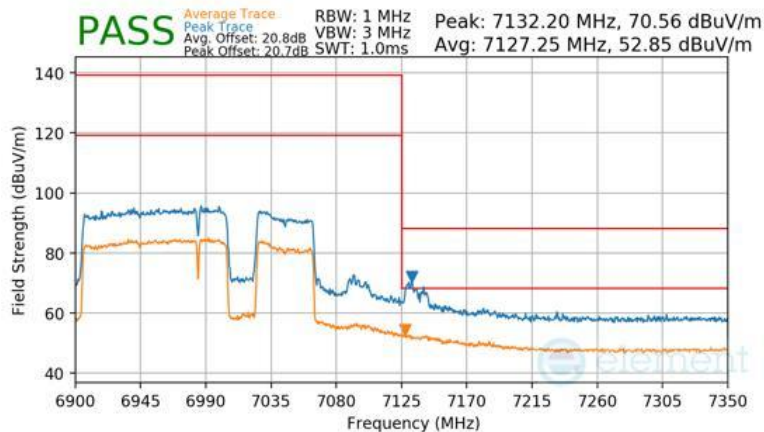

Plot 7-1477 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)


FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG			Page 493 of 644

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

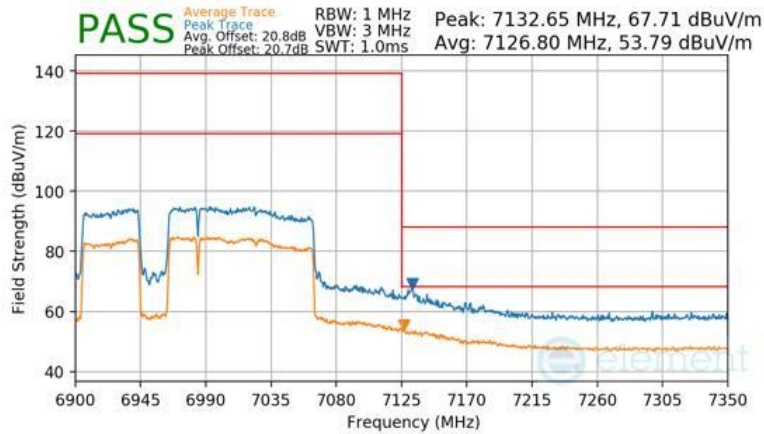

Plot 7-1478 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

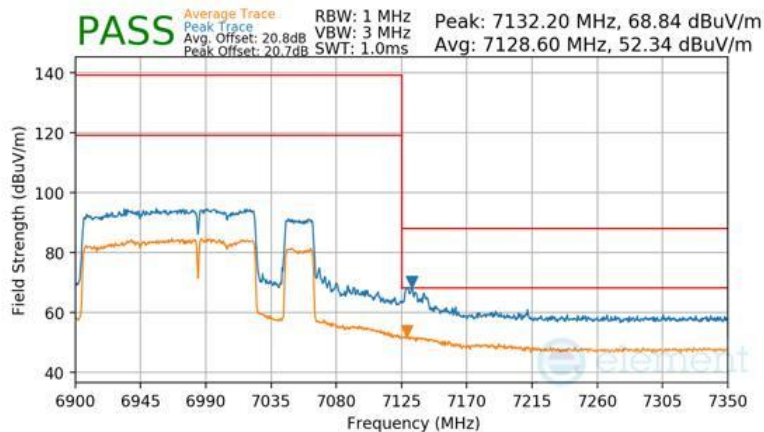

Plot 7-1479 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)


FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 494 of 644

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

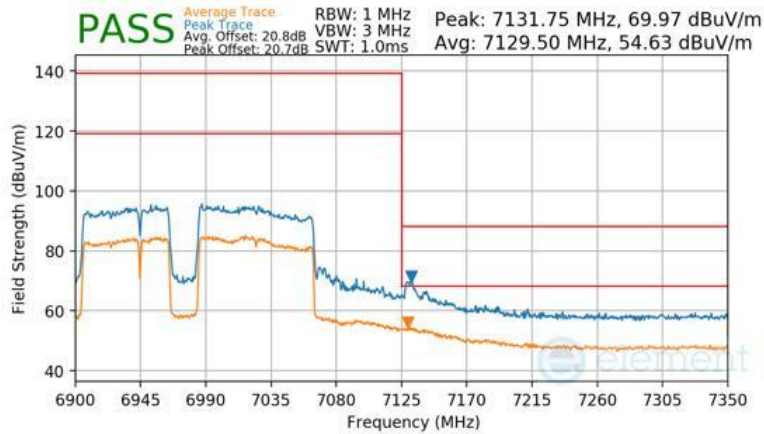

Plot 7-1480 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

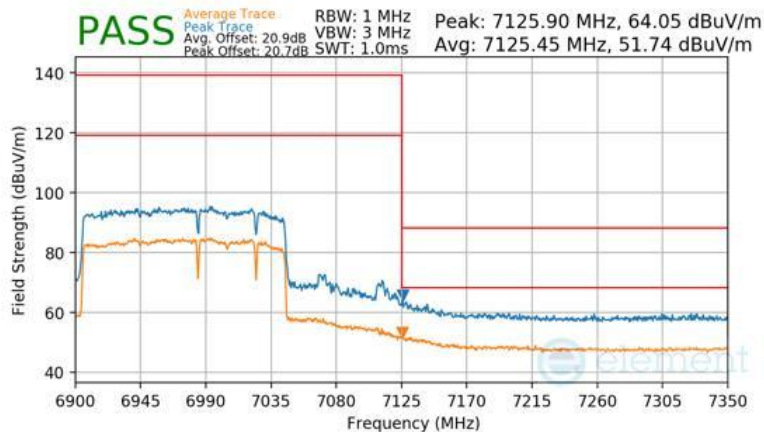


Plot 7-1481 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 495 of 644


RU996x2

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 68
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

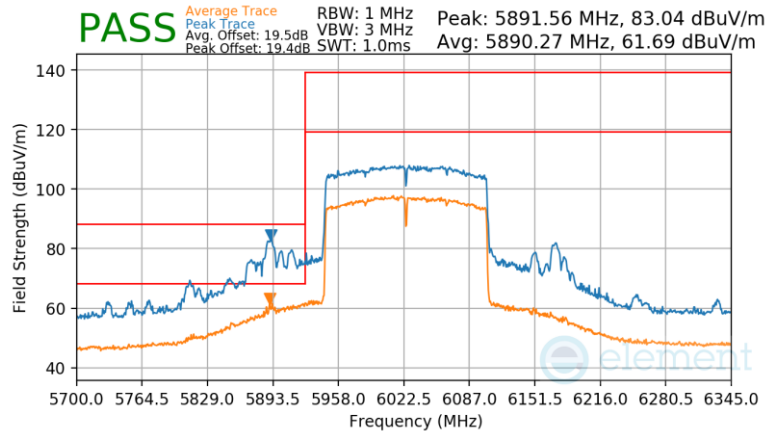

Plot 7-1482 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5) – RU996X2

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 68
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 207

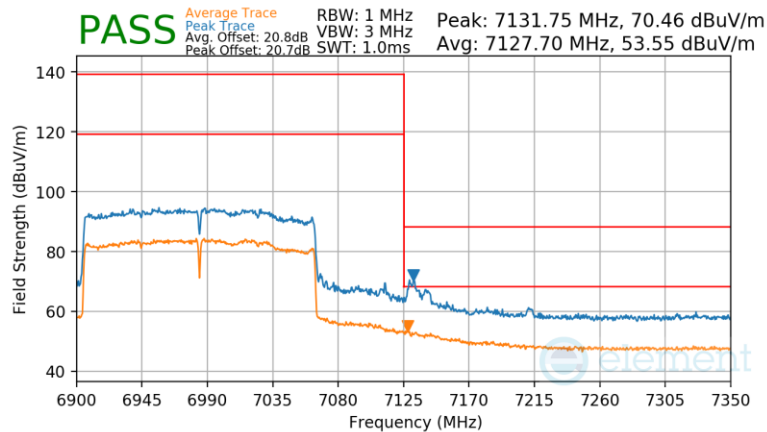

Plot 7-1483 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8) – RU996X2


FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 496 of 644

V 11.0 05/2025

7.7.7 Antenna 3b Radiated Band Edge Measurements (20MHz BW)


RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1

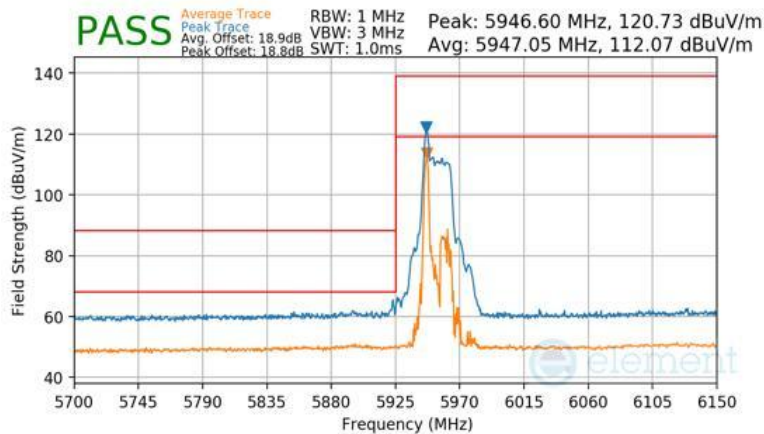

Plot 7-1484 Antenna 3b Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 8
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1

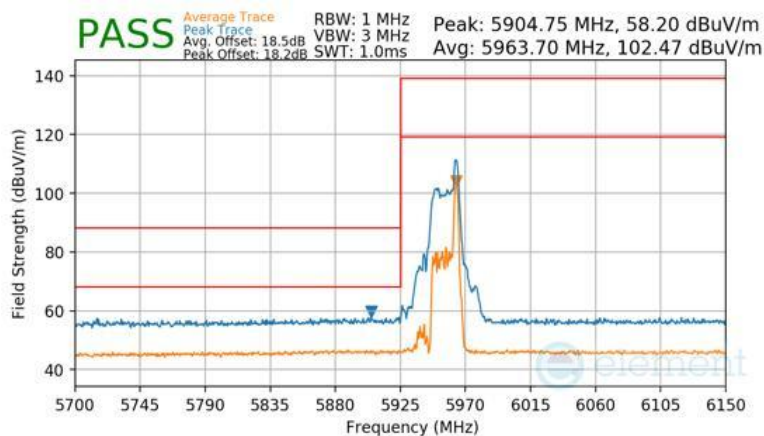


Plot 7-1485 Antenna 3b Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 497 of 644


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229

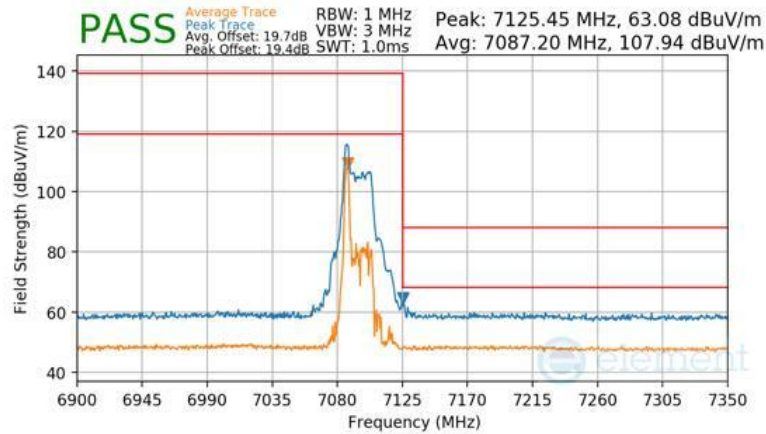

Plot 7-1486 Antenna 3b Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 8
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229

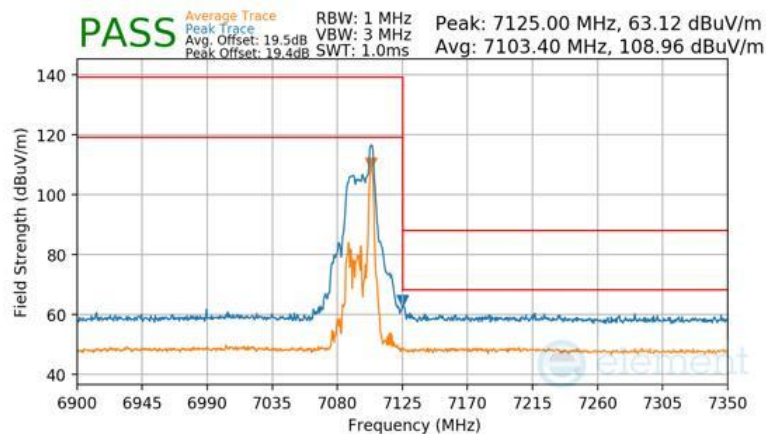


Plot 7-1487 Antenna 3b Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG			Page 498 of 644

V 11.0 05/2025


MRU

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 70
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1

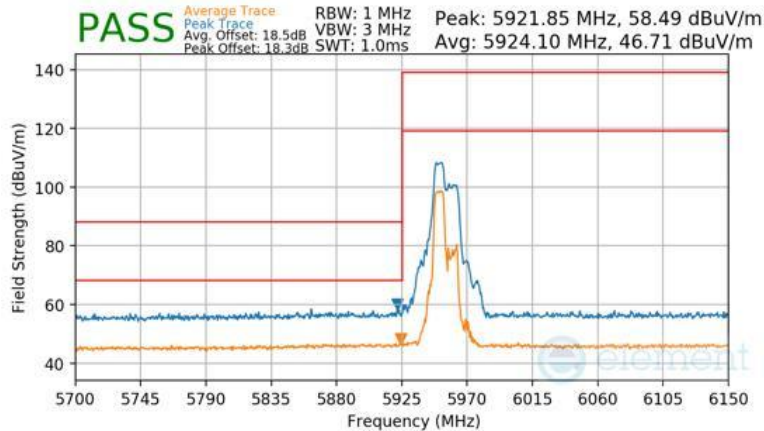

Plot 7-1488 Antenna 3b Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU52+26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1

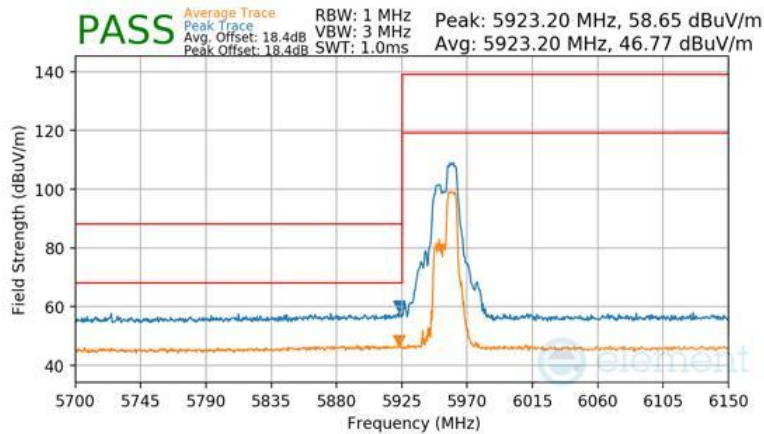


Plot 7-1489 Antenna 3b Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU52+26

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG	Test Dates: 9/15/2025 - 12/30/2025	EUT Type: Tablet Device	Page 499 of 644

V 11.0 05/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 70
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229

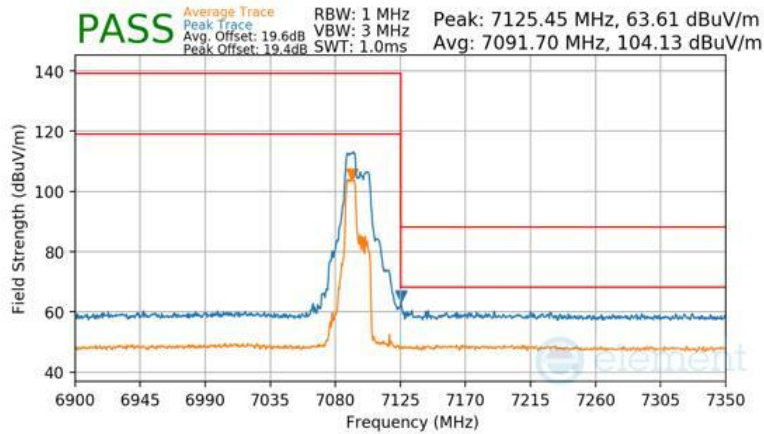

Plot 7-1490 Antenna 3b Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU52+26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229

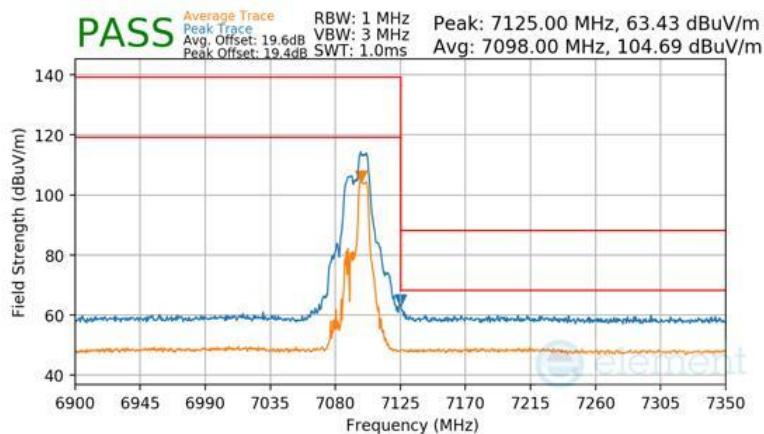

Plot 7-1491 Antenna 3b Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU52+26

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-25-R2.BCG			Page 500 of 644

V 11.0 05/2025