


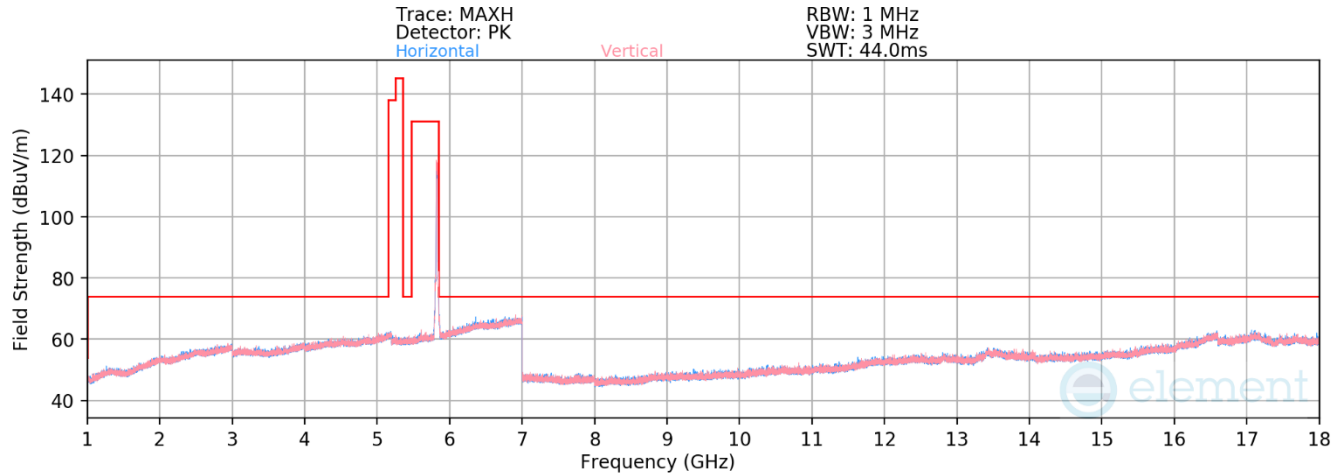

Plot 7-114. Radiated Spurious Emissions above 1GHz CDD Primary (802.11n – Ch. 165)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11650.00	Average	V	-	-	-84.49	19.49	42.00	53.98	-11.98
* 11650.00	Peak	V	-	-	-72.48	19.49	54.01	73.98	-19.97
17475.00	Peak	H	-	-	-73.33	28.50	62.17	68.23	-6.06

Table 7-128. Radiated Measurements CDD Primary

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 144 of 261

V 11.0 05/2025

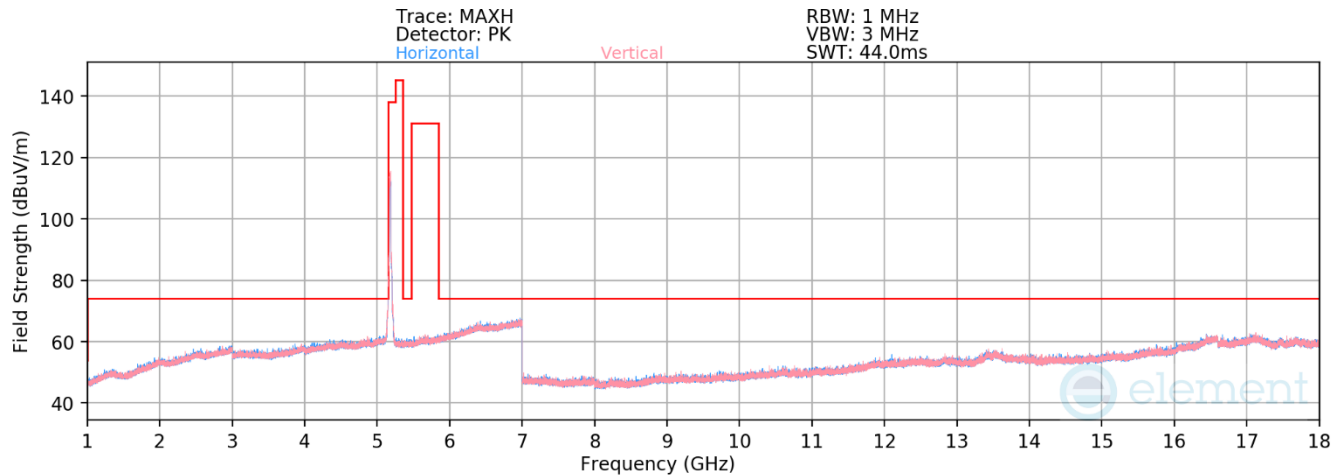

Plot 7-115. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be(SU) – Ch. 36)


Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5180MHz
Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	Peak	V	-	-	-72.81	16.98	51.17	68.23	-17.06
* 15540.00	Average	H	-	-	-85.54	24.96	46.42	53.98	-7.56
* 15540.00	Peak	H	-	-	-73.25	24.96	58.72	73.98	-15.26


Table 7-129. Radiated Measurements CDD Primary

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 145 of 261

V 11.0 05/2025

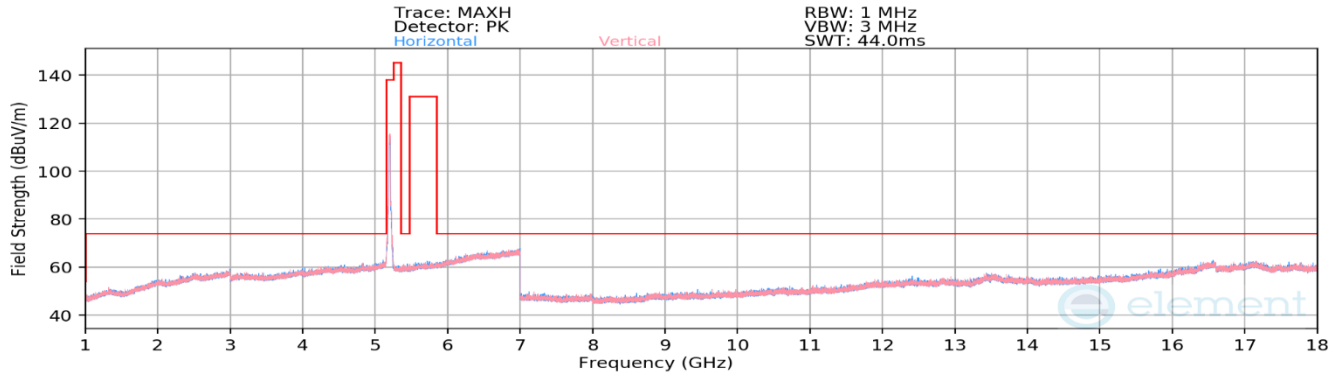

Plot 7-116. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be(SU) – Ch. 40)

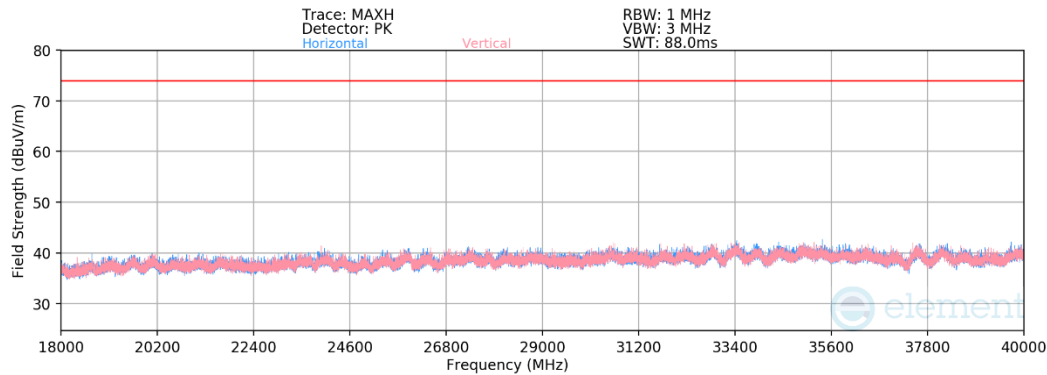

Plot 7-117. Radiated Spurious Emissions 18GHz - 40GHz CDD Primary (802.11be(SU) – Ch.40)


Mode: 802.11be(SU)
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10400.00	Peak	V	-	-	-72.42	16.99	0.00	51.57	68.23	-16.66
* 15600.00	Average	H	-	-	-85.63	24.98	0.00	46.35	53.98	-7.63
* 15600.00	Peak	H	-	-	-74.30	24.98	0.00	57.68	73.98	-16.30
* 20800.00	Average	H	-	-	-69.16	-7.57	-9.54	20.73	53.98	-33.25
* 20800.00	Peak	H	-	-	-57.08	-7.57	-9.54	32.81	73.98	-41.17
26000.00	Peak	V	-	-	-56.43	-5.88	-9.54	35.15	68.23	-33.08
* 31200.00	Average	H	-	-	-67.33	-3.74	-9.54	26.39	53.98	-27.59
* 31200.00	Peak	H	-	-	-56.18	-3.74	-9.54	37.54	73.98	-36.44

Table 7-130. Radiated Measurements CDD Primary

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 146 of 261

V 11.0 05/2025

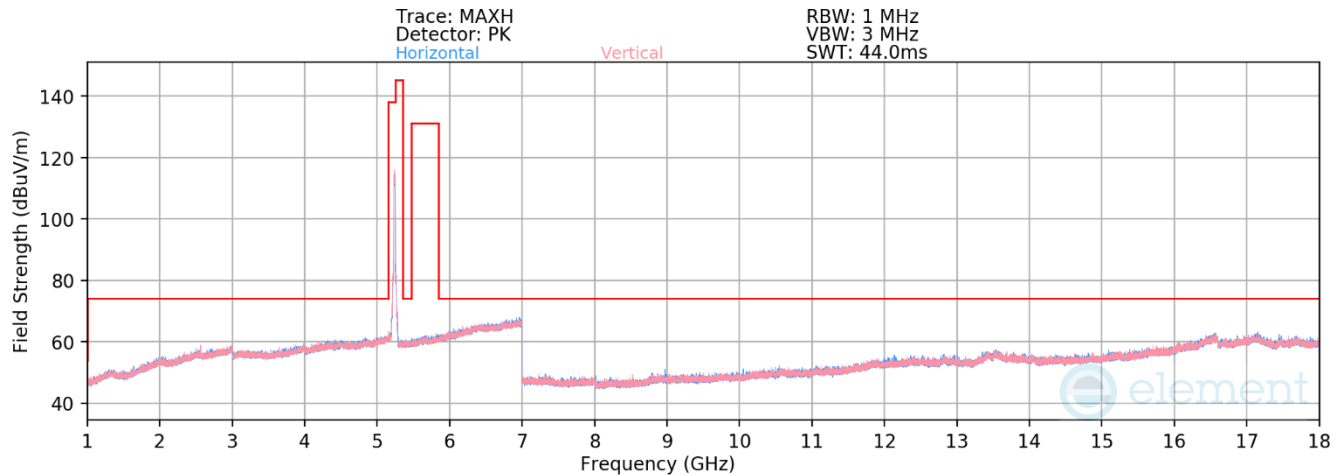

Plot 7-118. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be(SU) – Ch. 48)


Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	V	-	-	-72.86	17.66	51.80	68.23	-16.43
* 15720.00	Average	V	-	-	-85.81	25.65	46.83	53.98	-7.15
* 15720.00	Peak	V	-	-	-74.19	25.65	58.46	73.98	-15.52

Table 7-131. Radiated Measurements CDD Primary

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 147 of 261

V 11.0 05/2025

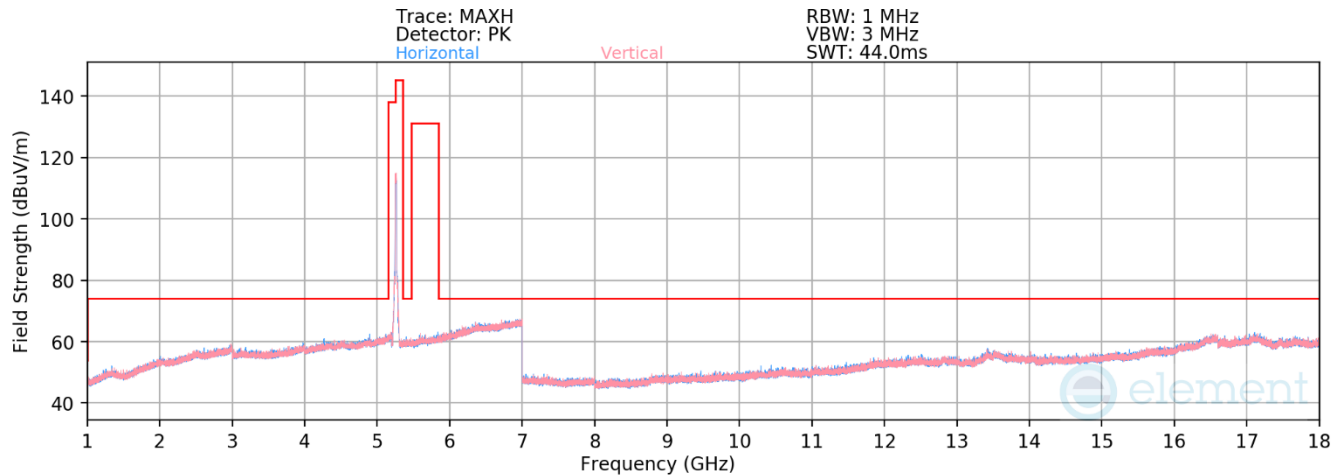

Plot 7-119. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be(SU) – Ch. 52)


Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5260MHz
Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	V	-	-	-72.99	17.53	51.54	68.23	-16.69
* 15780.00	Average	V	-	-	-85.71	25.60	46.90	53.98	-7.08
* 15780.00	Peak	V	-	-	-74.18	25.60	58.42	73.98	-15.56


Table 7-132. Radiated Measurements CDD Primary

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 148 of 261

V 11.0 05/2025

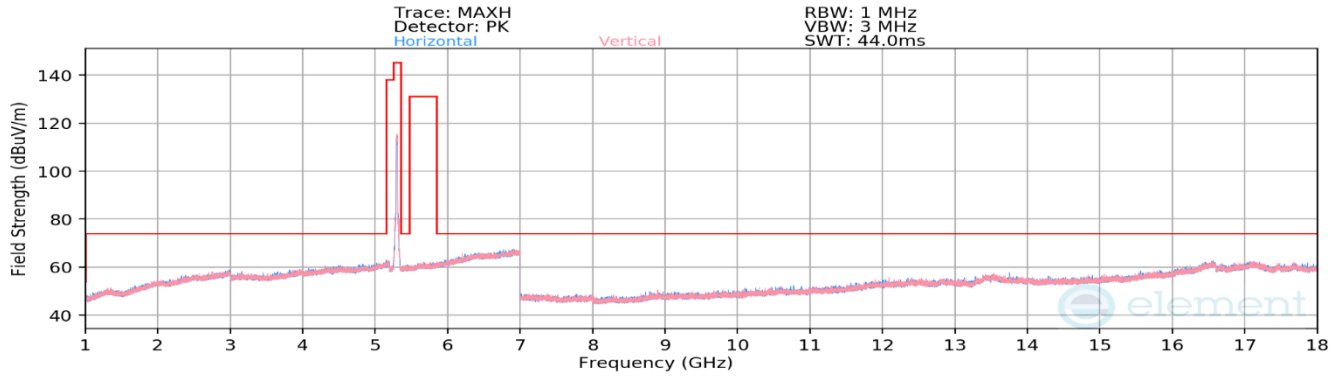

Plot 7-120. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be(SU) – Ch. 56)

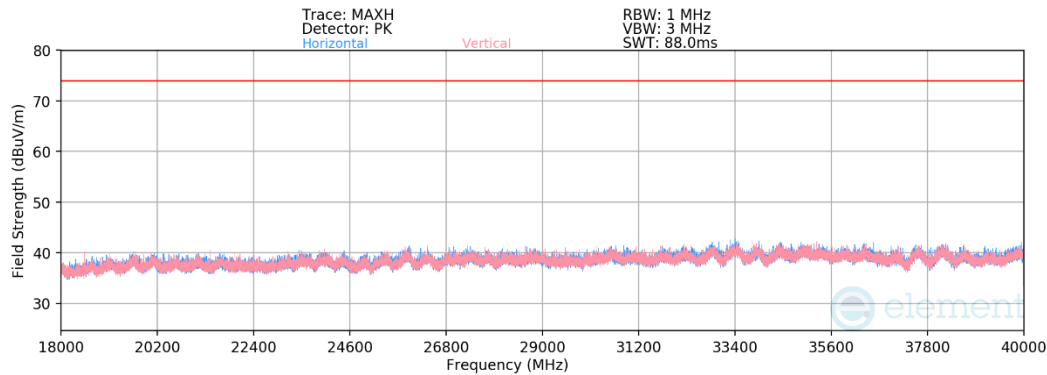

Plot 7-121. Radiated Spurious Emissions 18GHz - 40GHz CDD Primary (802.11be(SU) – Ch.56)


Mode: 802.11be(SU)
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10600.00	Peak	V	-	-	-73.22	17.98	0.00	51.76	68.23	-16.47
* 15900.00	Average	H	-	-	-85.65	25.73	0.00	47.08	53.98	-6.90
* 15900.00	Peak	H	-	-	-74.51	25.73	0.00	58.23	73.98	-15.75
* 21120.00	Average	V	-	-	-68.29	-7.55	-9.54	21.62	53.98	-32.36
* 21120.00	Peak	V	-	-	-56.93	-7.55	-9.54	32.98	73.98	-41.00
26400.00	Peak	V	-	-	-55.85	-5.30	-9.54	36.31	68.23	-31.92
* 31680.00	Average	V	-	-	-67.22	-4.05	-9.54	26.19	53.98	-27.79
* 31680.00	Peak	V	-	-	-55.47	-4.05	-9.54	37.94	73.98	-36.04

Table 7-133. Radiated Measurements CDD Primary

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 149 of 261

V 11.0 05/2025

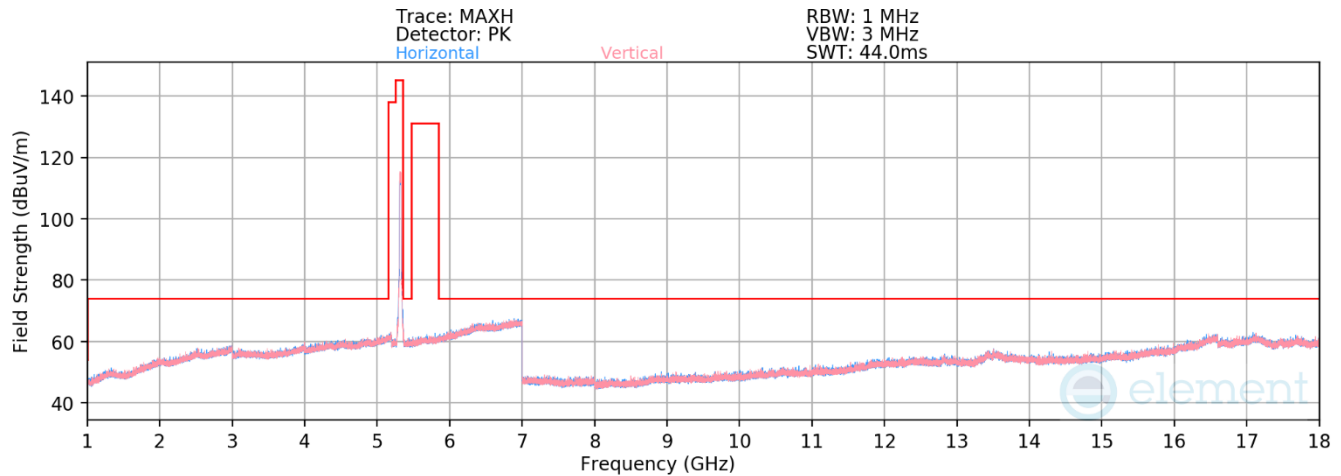

Plot 7-122. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be(SU) – Ch. 64)


Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5320MHz
Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	V	-	-	-84.61	18.13	40.52	53.98	-13.46
* 10640.00	Peak	V	-	-	-72.38	18.13	52.75	73.98	-21.23
* 15960.00	Average	H	-	-	-85.90	25.95	47.05	53.98	-6.93
* 15960.00	Peak	H	-	-	-73.95	25.95	59.01	73.98	-14.97

Table 7-134. Radiated Measurements CDD Primary

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 150 of 261

V 11.0 05/2025

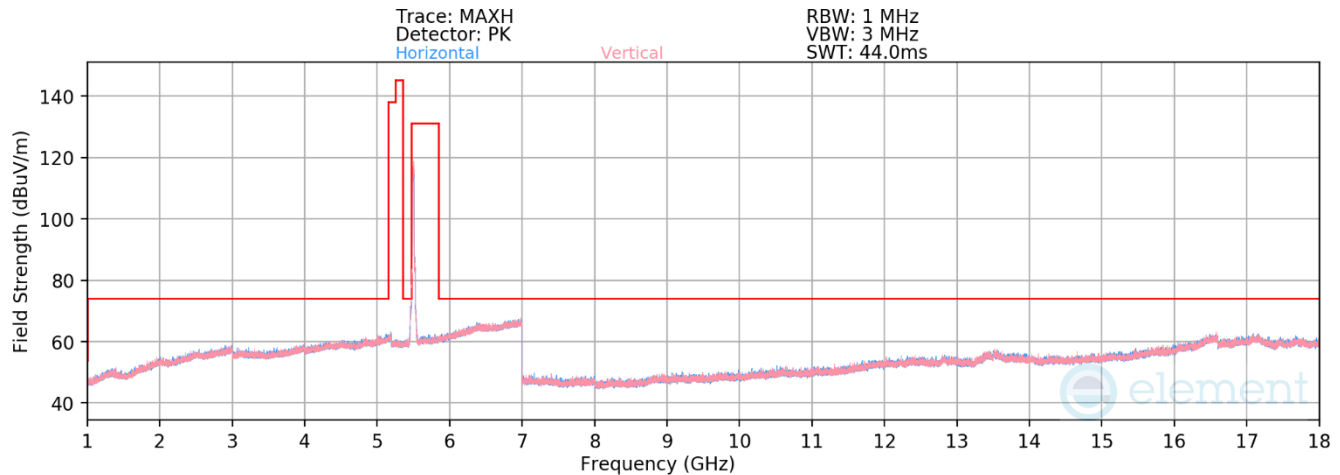

Plot 7-123. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be(SU) – Ch. 100)


Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	V	-	-	-84.54	18.09	40.55	53.98	-13.43
* 11000.00	Peak	V	-	-	-73.17	18.09	51.92	73.98	-22.06
16500.00	Peak	H	-	-	-73.51	27.53	61.01	68.23	-7.22


Table 7-135. Radiated Measurements CDD Primary

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 151 of 261

V 11.0 05/2025

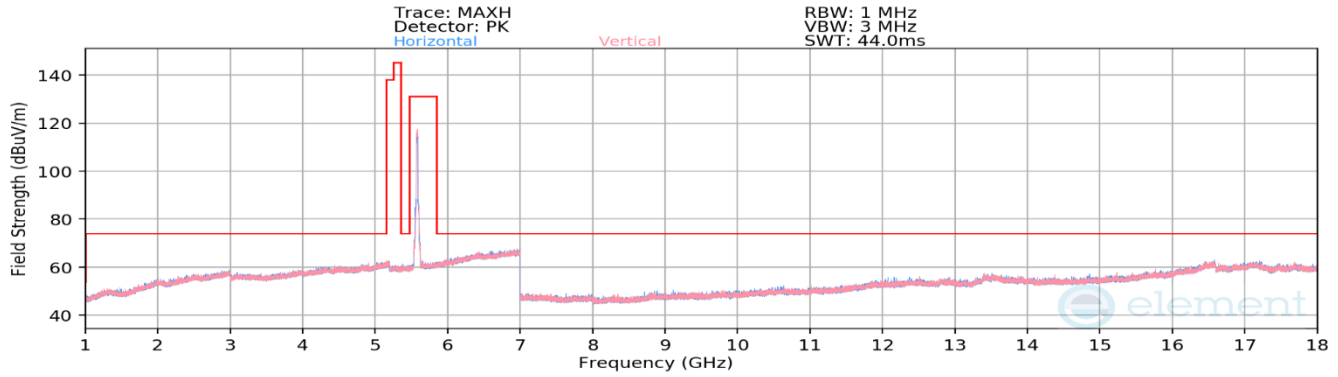

Plot 7-124. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be(SU) – Ch. 116)

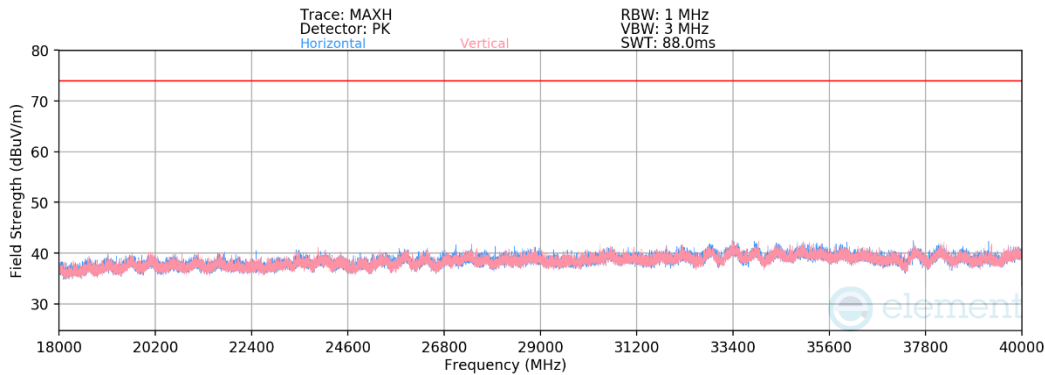


Plot 7-125. Radiated Spurious Emissions 18GHz - 40GHz CDD Primary (802.11be(SU) – Ch.116)

Mode:	802.11be(SU)
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5580MHz
Channel:	116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	Average	H	-	-	-84.55	18.84	0.00	41.29	53.98	-12.69
* 11160.00	Peak	H	-	-	-73.25	18.84	0.00	52.60	73.98	-21.38
16740.00	Peak	H	-	-	-73.02	27.77	0.00	61.74	68.23	-6.49
* 22320.00	Average	V	-	-	-69.20	-7.57	-9.54	20.69	53.98	-33.29
* 22320.00	Peak	V	-	-	-57.39	-7.64	-9.54	32.43	73.98	-41.55
27900.00	Peak	H	-	-	-57.22	-4.75	-9.54	35.49	68.23	-32.74
33480.00	Peak	H	-	-	-54.60	-4.28	-9.54	38.58	68.23	-29.65

Table 7-136. Radiated Measurements CDD Primary

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 152 of 261

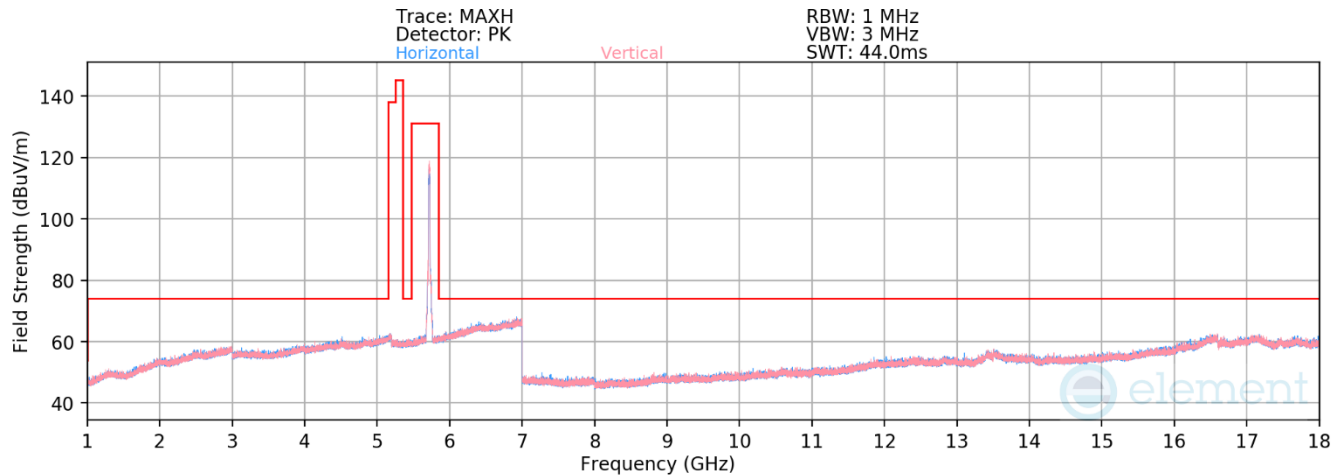

Plot 7-126. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be(SU) – Ch. 144)


Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5720MHz
Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11440.00	Average	V	-	-	-84.99	18.86	40.87	53.98	-13.11
* 11440.00	Peak	V	-	-	-73.47	18.86	52.40	73.98	-21.58
17160.00	Peak	V	-	-	-73.51	28.01	61.50	68.23	-6.73

Table 7-137. Radiated Measurements CDD Primary

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 153 of 261

V 11.0 05/2025

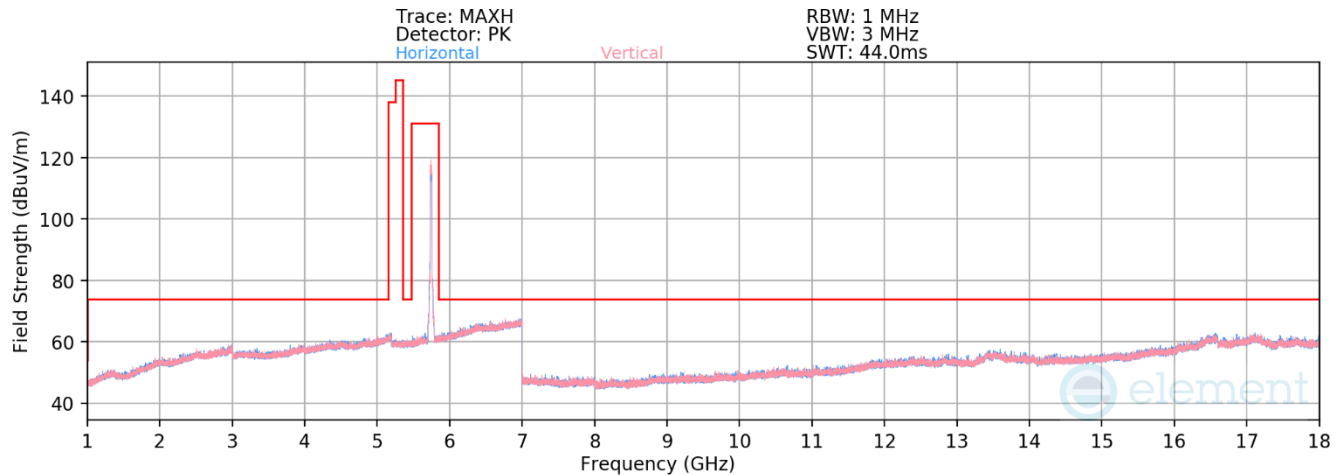

Plot 7-127. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be(SU) – Ch. 149)


Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	Average	V	-	-	-84.73	18.94	41.21	53.98	-12.77
* 11490.00	Peak	V	-	-	-73.56	18.94	52.38	73.98	-21.60
17235.00	Peak	V	-	-	-73.50	27.89	61.39	68.23	-6.84


Table 7-138. Radiated Measurements CDD Primary

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 154 of 261

V 11.0 05/2025

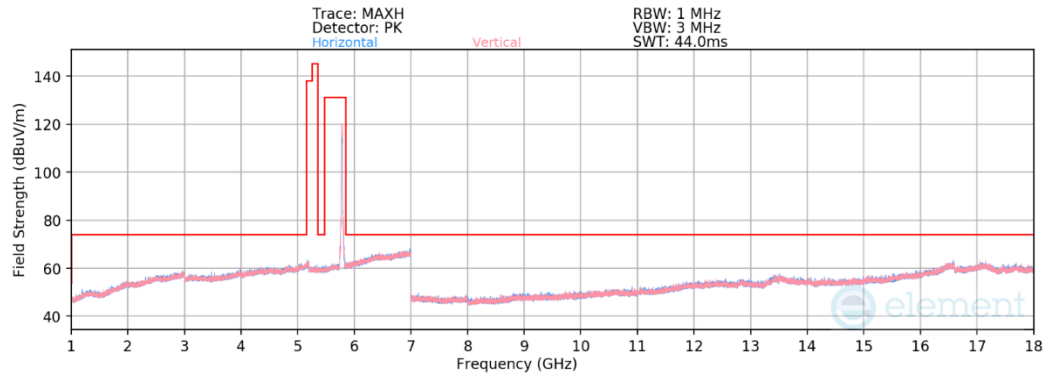

Plot 7-128. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be(SU) – Ch. 157)

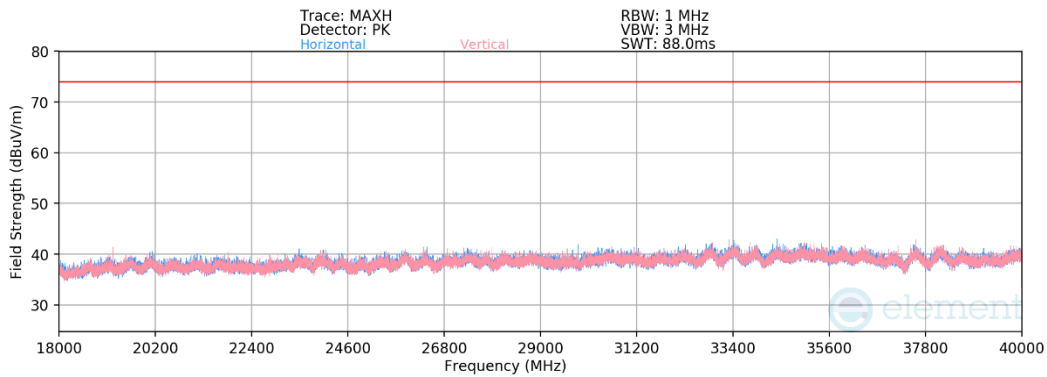

Plot 7-129. Radiated Spurious Emissions 18GHz - 40GHz CDD Primary (802.11be(SU) – Ch.157)

Mode: 802.11be(SU)

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5785MHz

Channel: 157


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11570.00	Average	V	-	-	-84.47	19.25	0.00	41.79	53.98	-12.19
* 11570.00	Peak	V	-	-	-73.05	19.25	0.00	53.20	73.98	-20.78
17355.00	Peak	V	-	-	-73.13	27.54	0.00	61.41	68.23	-6.82
23140.00	Peak	H	-	-	-58.23	-7.12	-9.54	32.11	68.23	-36.12
28925.00	Peak	V	-	-	-56.16	-3.99	-9.54	37.31	68.23	-30.92
34710.00	Peak	H	-	-	-67.07	-4.70	-9.54	25.69	68.23	-42.54

Table 7-139. Radiated Measurements CDD Primary

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 155 of 261

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

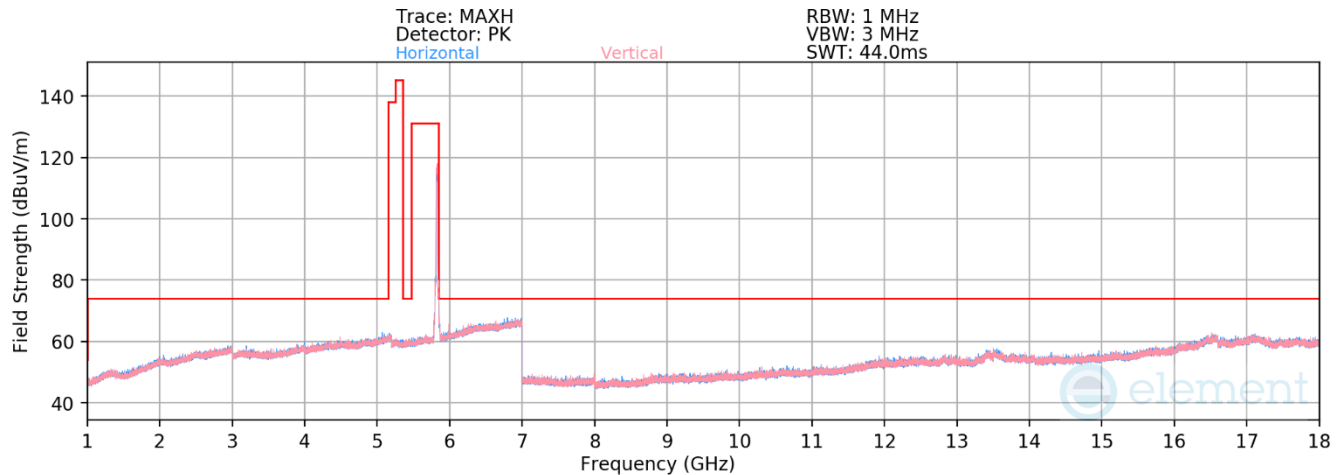

Plot 7-130. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be(SU) – Ch. 165)

Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	H	-	-	-84.67	19.48	41.81	53.98	-12.17
* 11650.00	Peak	H	-	-	-73.12	19.48	53.36	73.98	-20.62
17475.00	Peak	V	-	-	-73.68	28.50	61.82	68.23	-6.41

Table 7-140. Radiated Measurements CDD Primary

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 156 of 261

V 11.0 05/2025

7.6.2 CDD Diversity Radiated Spurious Emission

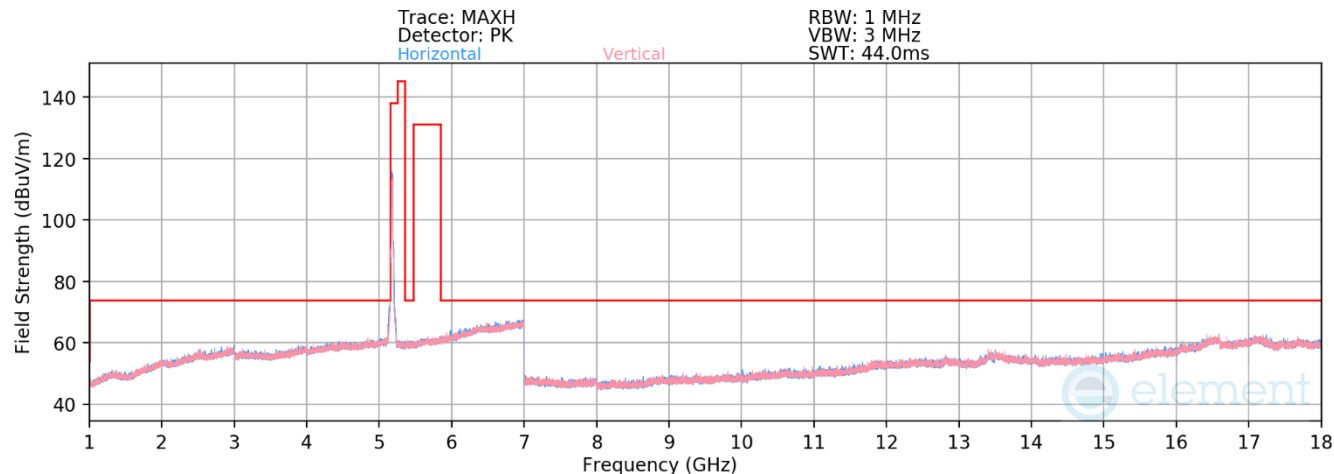

Plot 7-131. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11n – Ch. 36)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5180MHz
Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10360.00	Peak	V	-	-	-72.64	16.98	51.34	68.23	-16.89
* 15540.00	Average	V	-	-	-85.12	24.96	46.84	53.98	-7.14
* 15540.00	Peak	V	-	-	-73.32	24.96	58.64	73.98	-15.34


Table 7-141. Radiated Measurements CDD Diversity

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 157 of 261

V 11.0 05/2025

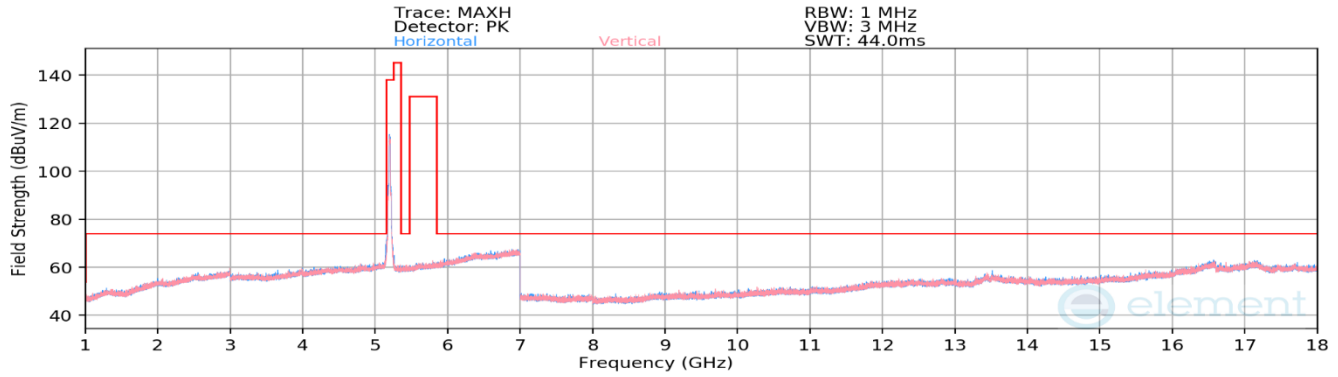

Plot 7-132. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11n – Ch. 40)

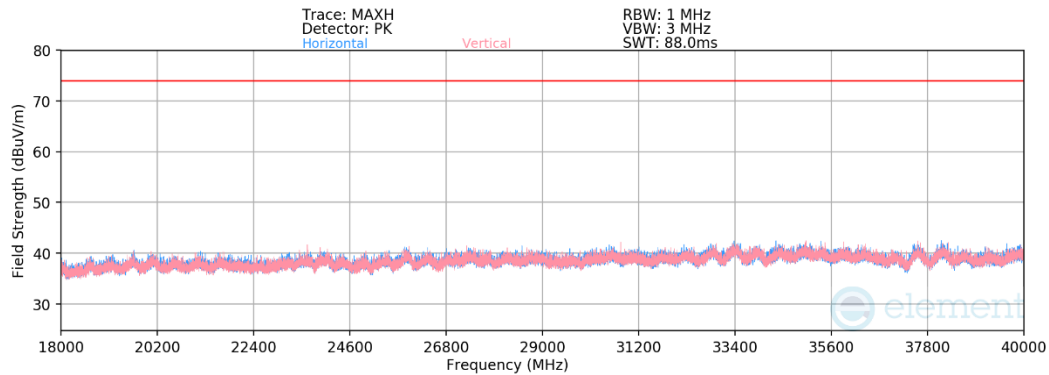


Plot 7-133. Radiated Spurious Emissions 18GHz - 40GHz CDD Diversity (802.11n – Ch.40)

Mode: 802.11n
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10400.00	Peak	V	-	-	-72.34	16.99	0.00	51.65	68.23	-16.58
* 15600.00	Average	H	-	-	-85.39	24.91	0.00	46.52	53.98	-7.46
* 15600.00	Peak	H	-	-	-73.79	24.91	0.00	58.12	73.98	-15.86
* 20800.00	V	V	-	-	-69.26	-7.57	-9.54	20.63	53.98	-33.35
* 20800.00	V	V	-	-	-57.83	-7.67	-9.54	31.96	73.98	-42.02
26000.00	V	V	-	-	-55.89	-5.88	-9.54	35.69	68.23	-32.54
* 31200.00	H	H	-	-	-67.56	-3.74	-9.54	26.16	53.98	-27.82
* 31200.00	H	H	-	-	-56.05	-3.74	-9.54	37.67	73.98	-36.31

Table 7-142. Radiated Measurements CDD Diversity

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 158 of 261

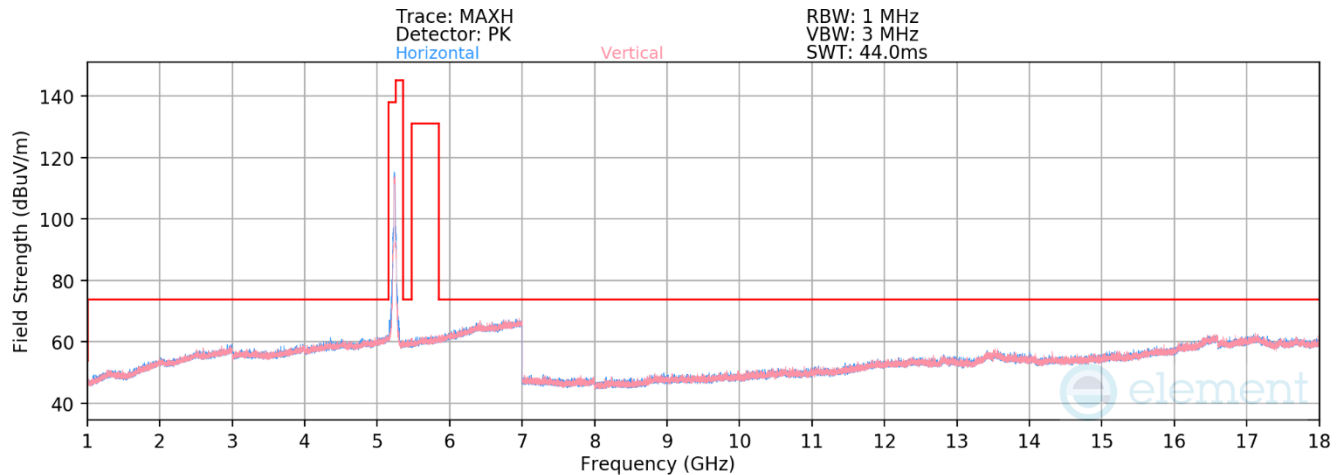

Plot 7-134. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11n – Ch. 48)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5240MHz
Channel: 48


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	V	-	-	-73.44	17.66	51.21	68.23	-17.02
* 15720.00	Average	V	-	-	-85.54	25.43	46.89	53.98	-7.09
* 15720.00	Peak	V	-	-	-74.16	25.43	58.27	73.98	-15.71

Table 7-143. Radiated Measurements CDD Diversity

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 159 of 261

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

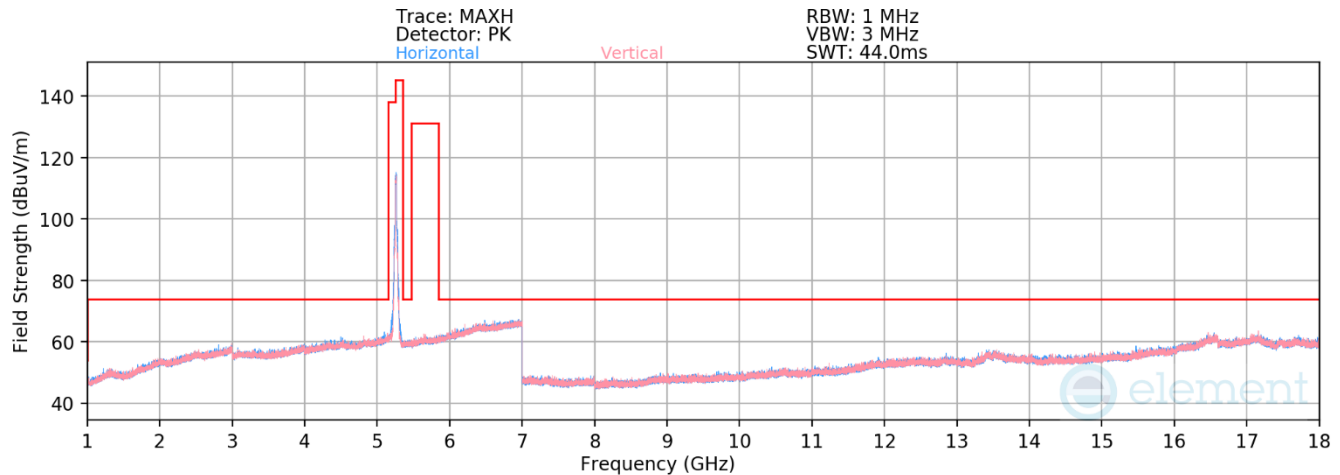

Plot 7-135. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11n – Ch. 52)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5260MHz
Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	V	-	-	-73.43	17.56	51.12	68.23	-17.11
* 15780.00	Average	V	-	-	-85.73	25.65	46.92	53.98	-7.06
* 15780.00	Peak	V	-	-	-74.56	25.65	58.09	73.98	-15.89


Table 7-144. Radiated Measurements CDD Diversity

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 160 of 261

V 11.0 05/2025

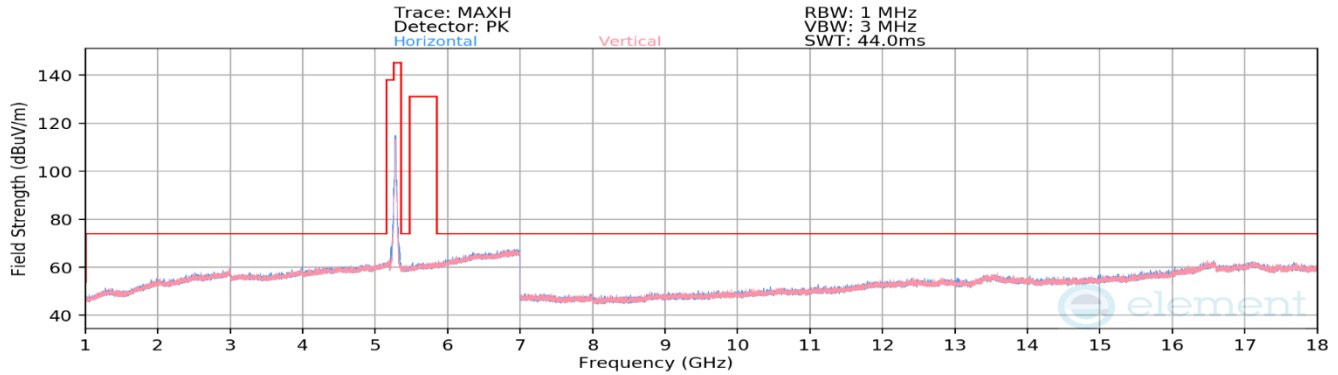

Plot 7-136. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11n – Ch. 56)

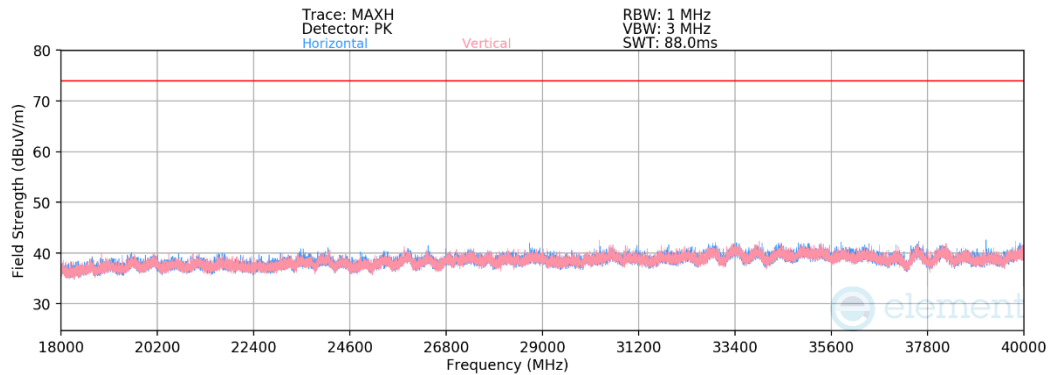


Plot 7-137. Radiated Spurious Emissions 18GHz - 40GHz CDD Diversity (802.11n – Ch.56)

Mode: 802.11n
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10560.00	Peak	H	-	-	-73.61	17.53	0.00	50.92	68.23	-17.31
* 15840.00	Average	H	-	-	-85.93	25.75	0.00	46.82	53.98	-7.16
* 15840.00	Peak	H	-	-	-74.42	25.75	0.00	58.33	73.98	-15.65
* 21120.00	Average	H	-	-	-68.40	-7.55	-9.54	21.51	53.98	-32.47
* 21120.00	Peak	H	-	-	-57.04	-7.55	-9.54	32.87	73.98	-41.11
26400.00	Peak	H	-	-	-55.68	-5.30	-9.54	36.48	68.23	-31.75
* 31680.00	Average	H	-	-	-67.18	-4.09	-9.54	26.19	53.98	-27.79
* 31680.00	Peak	H	-	-	-56.06	-4.09	-9.54	37.31	73.98	-36.67

Table 7-145. Radiated Measurements CDD Diversity

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 161 of 261

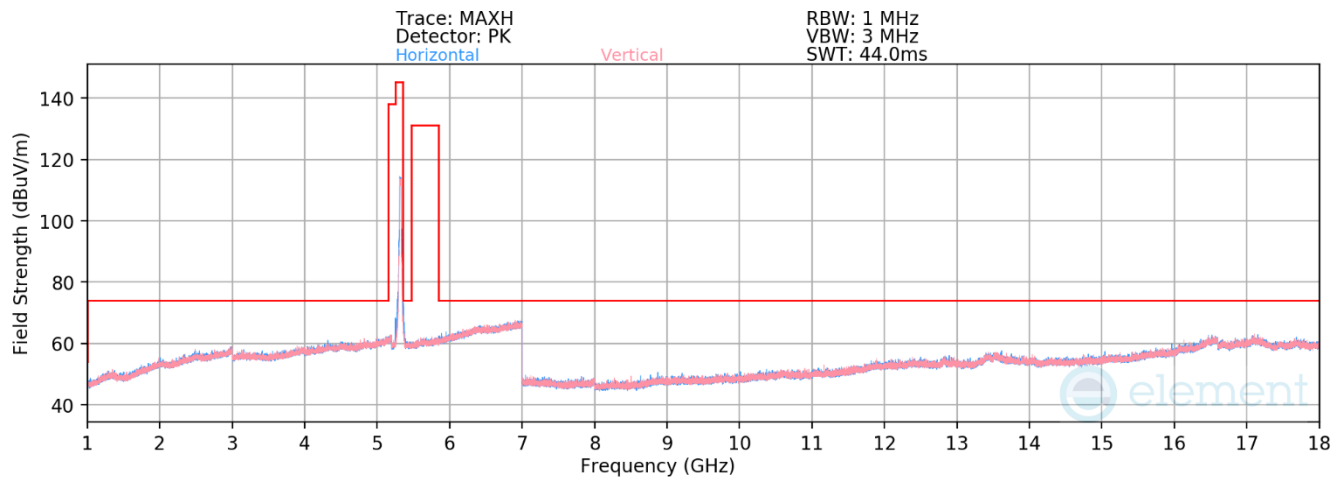

Plot 7-138. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11n – Ch. 64)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5320MHz
Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 10640.00	Average	V	-	-	-84.55	18.08	40.53	53.98	-13.45
* 10640.00	Peak	V	-	-	-73.56	18.08	51.52	73.98	-22.46
* 15960.00	Average	V	-	-	-85.79	25.93	47.14	53.98	-6.84
* 15960.00	Peak	V	-	-	-74.56	25.93	58.37	73.98	-15.61

Table 7-146. Radiated Measurements CDD Diversity

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 162 of 261

V 11.0 05/2025

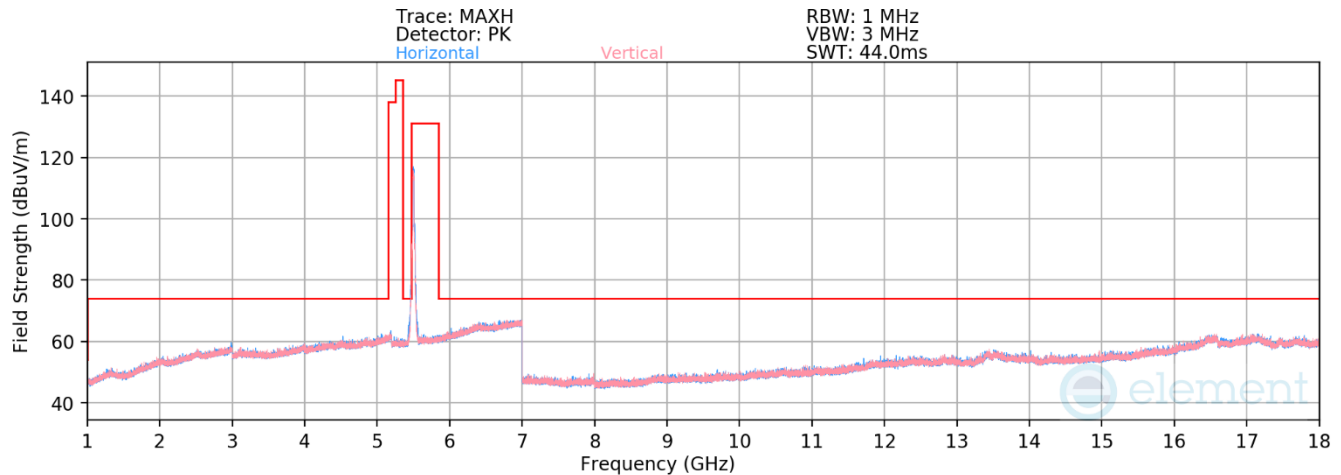

Plot 7-139. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11n – Ch. 100)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	V	-	-	-84.49	18.23	40.74	53.98	-13.24
* 11000.00	Peak	V	-	-	-73.10	18.23	52.12	73.98	-21.86
16500.00	Peak	H	-	-	-73.16	27.52	61.36	68.23	-6.87


Table 7-147. Radiated Measurements CDD Diversity

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 163 of 261

V 11.0 05/2025

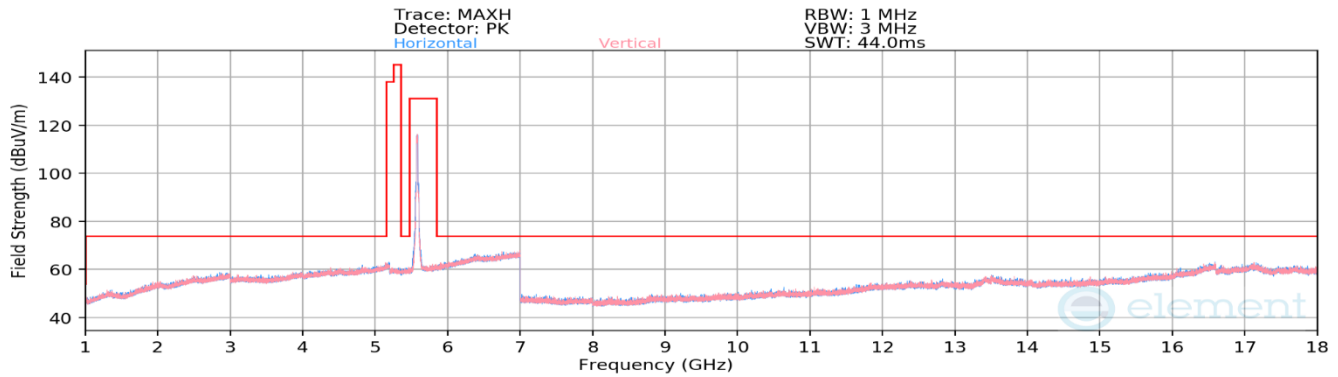

Plot 7-140. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11n – Ch. 116)

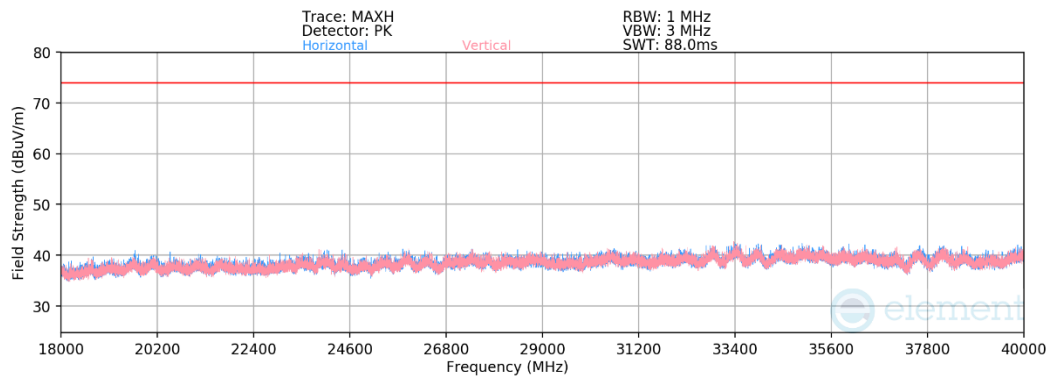

Plot 7-141. Radiated Spurious Emissions 18GHz - 40GHz CDD Diversity (802.11n – Ch.116)


Mode: 802.11n
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5580MHz
 Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11160.00	Average	V	-	-	-84.42	18.49	0.00	41.07	53.98	-12.91
* 11160.00	Peak	V	-	-	-72.30	18.49	0.00	53.19	73.98	-20.79
16740.00	Peak	V	-	-	-73.61	27.75	0.00	61.14	68.23	-7.09
* 22320.00	Average	H	-	-	-69.33	-7.57	-9.54	20.56	53.98	-33.42
* 22320.00	Peak	H	-	-	-57.91	-7.57	-9.54	31.98	73.98	-42.00
27900.00	Peak	H	-	-	-56.88	-4.48	-9.54	36.10	68.23	-32.13
33480.00	Peak	V	-	-	-54.86	-4.21	-9.54	38.39	68.23	-29.84

Table 7-148. Radiated Measurements CDD Diversity

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 164 of 261

V 11.0 05/2025

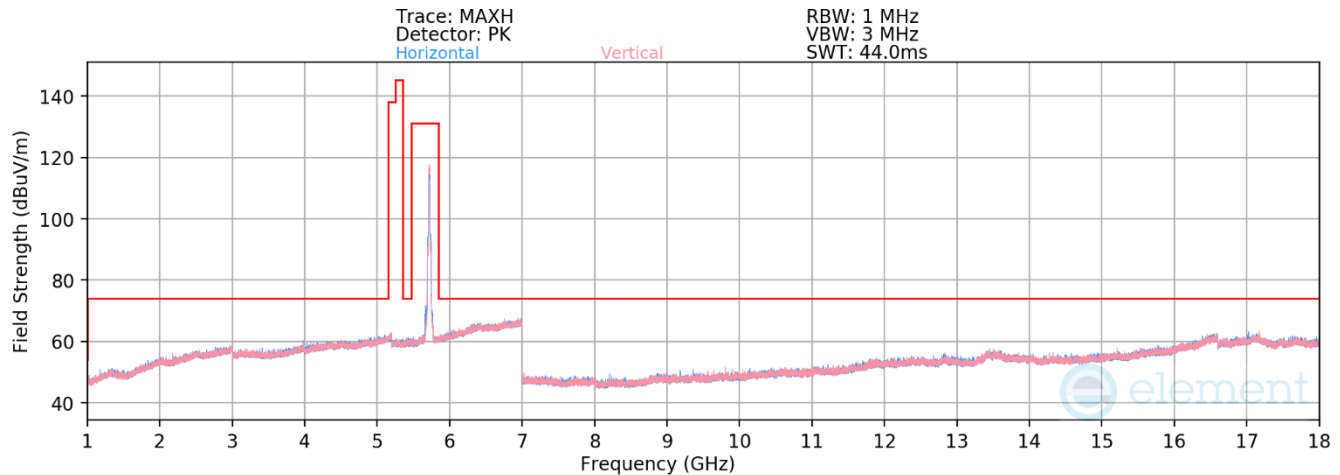

Plot 7-142. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11n – Ch. 144)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5720MHz
Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11440.00	Average	V	-	-	-84.99	18.88	40.89	53.98	-13.09
* 11440.00	Peak	V	-	-	-73.36	18.88	52.52	73.98	-21.46
17160.00	Peak	V	-	-	-73.56	28.21	61.65	68.23	-6.58

Table 7-149. Radiated Measurements CDD Diversity

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 165 of 261

V 11.0 05/2025

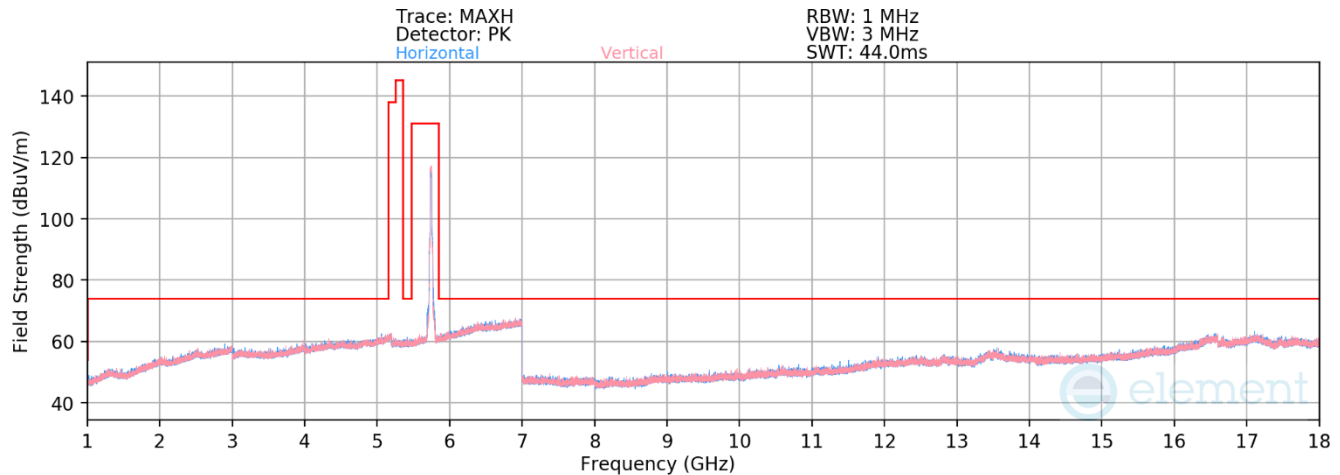

Plot 7-143. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11n – Ch. 149)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	Average	V	-	-	-84.80	18.94	41.15	53.98	-12.83
* 11490.00	Peak	V	-	-	-73.28	18.94	52.67	73.98	-21.31
17235.00	Peak	V	-	-	-74.03	28.01	60.99	68.23	-7.24


Table 7-150. Radiated Measurements CDD Diversity

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 166 of 261

V 11.0 05/2025

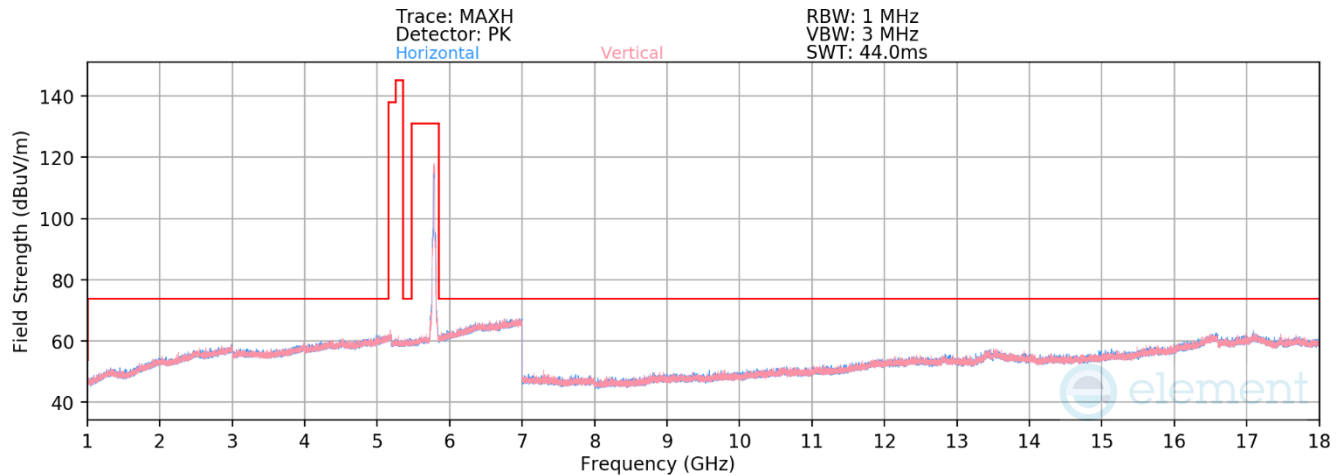

Plot 7-144. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11n – Ch.157)

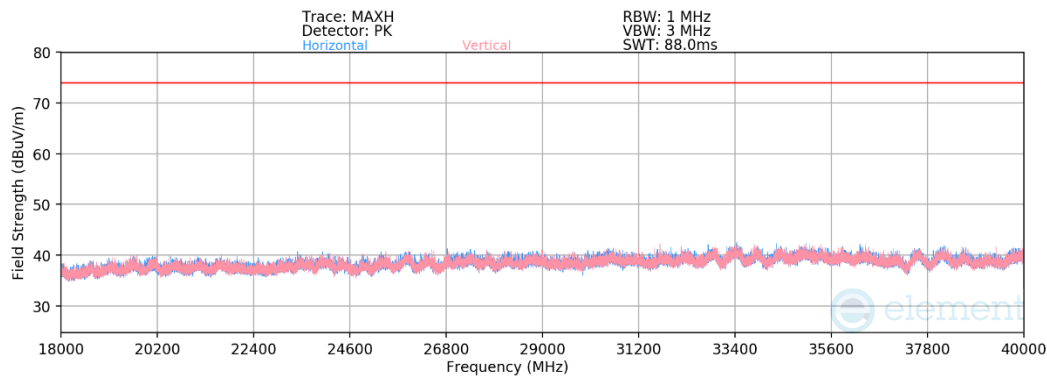

Plot 7-145. Radiated Spurious Emissions 18GHz – 40GHz CDD Diversity (802.11n – Ch.157)

Mode: 802.11n

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5785MHz

Channel: 157


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11570.00	Average	V	-	-	-84.48	19.19	0.00	41.71	53.98	-12.27
* 11570.00	Peak	V	-	-	-73.05	19.19	0.00	53.15	73.98	-20.83
17355.00	Peak	V	-	-	-73.66	27.88	0.00	61.22	68.23	-7.01
23140.00	Peak	H	-	-	-58.00	-7.13	-9.54	32.33	68.23	-35.90
28925.00	Peak	H	-	-	-55.65	-3.95	-9.54	37.86	68.23	-30.37
34710.00	Peak	H	-	-	-55.18	-4.81	-9.54	37.47	68.23	-30.76

Table 7-151. Radiated Measurements CDD Diversity

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 167 of 261

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

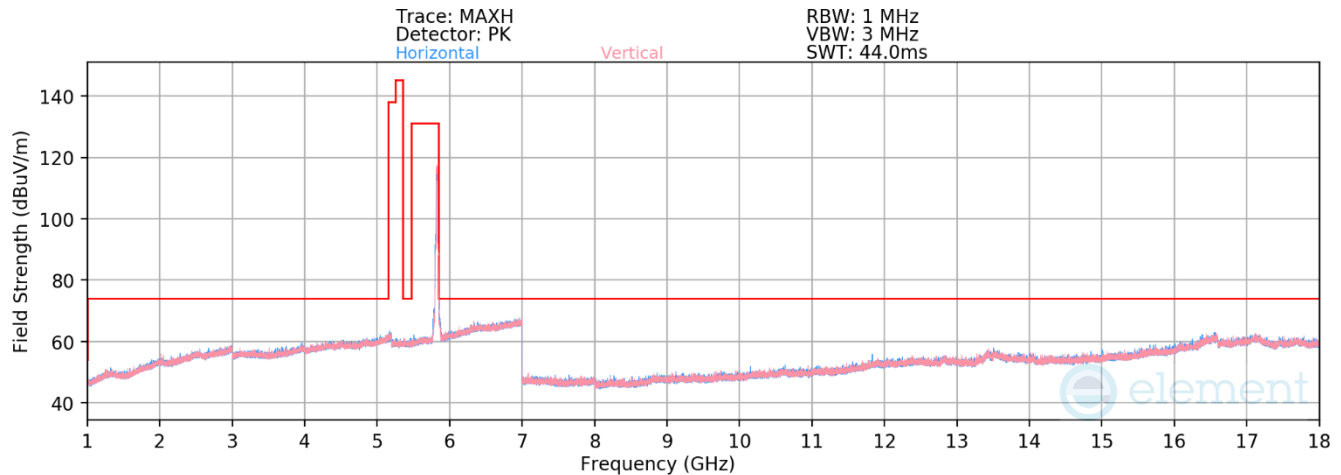

Plot 7-146. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11n – Ch. 165)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11650.00	Average	V	-	-	-84.36	19.42	42.07	53.98	-11.91
* 11650.00	Peak	V	-	-	-73.24	19.42	53.19	73.98	-20.79
17475.00	Peak	H	-	-	-74.08	28.77	61.69	68.23	-6.54

Table 7-152. Radiated Measurements CDD Diversity

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 168 of 261

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

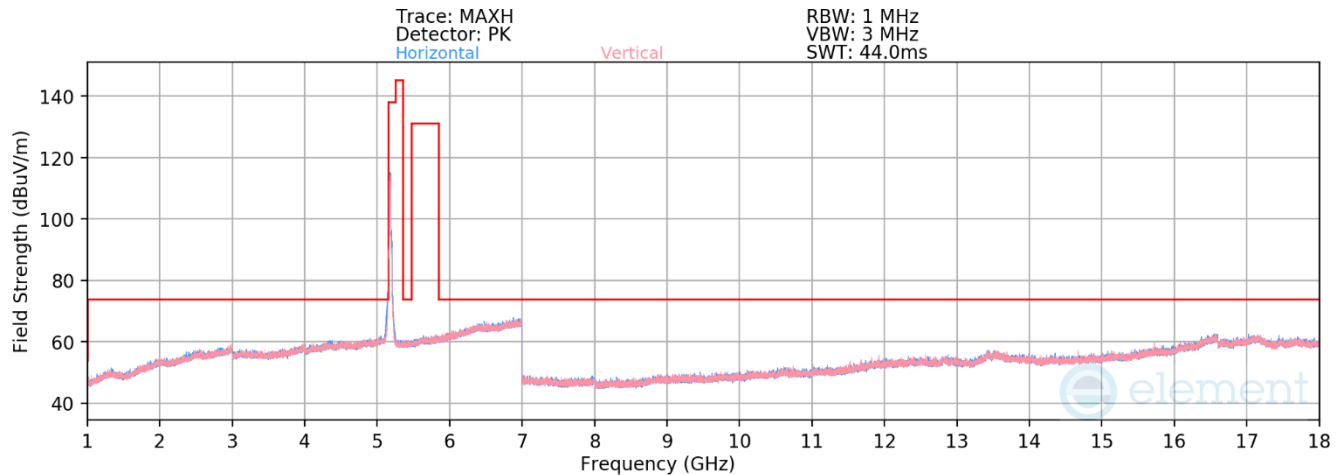

Plot 7-147. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be(SU) – Ch. 36)

Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5180MHz
Channel: 36


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	Peak	V	-	-	-72.69	16.98	51.29	68.23	-16.94
* 15540.00	Average	H	-	-	-85.39	24.96	46.57	53.98	-7.41
* 15540.00	Peak	H	-	-	-73.79	24.96	58.18	73.98	-15.80

Table 7-153. Radiated Measurements CDD Diversity


FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 169 of 261

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

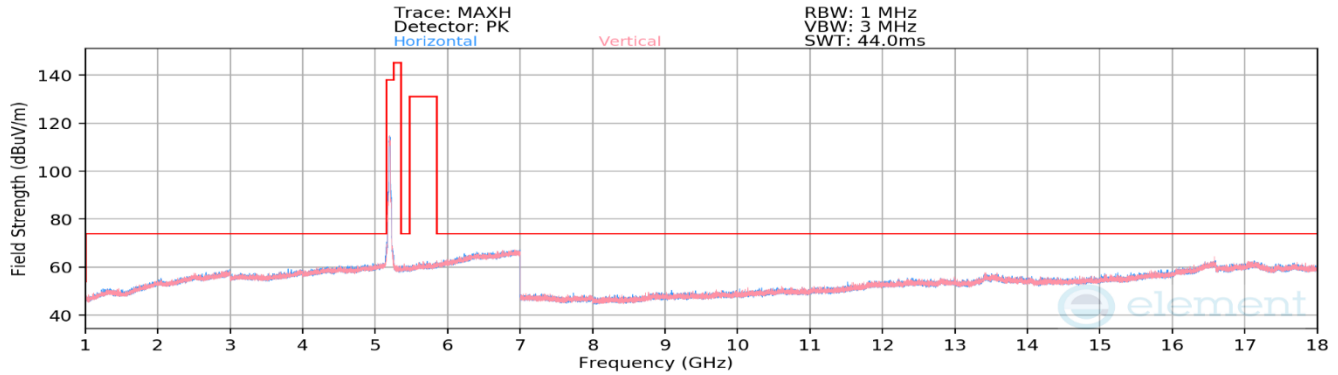

Plot 7-148. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be(SU) – Ch. 40)

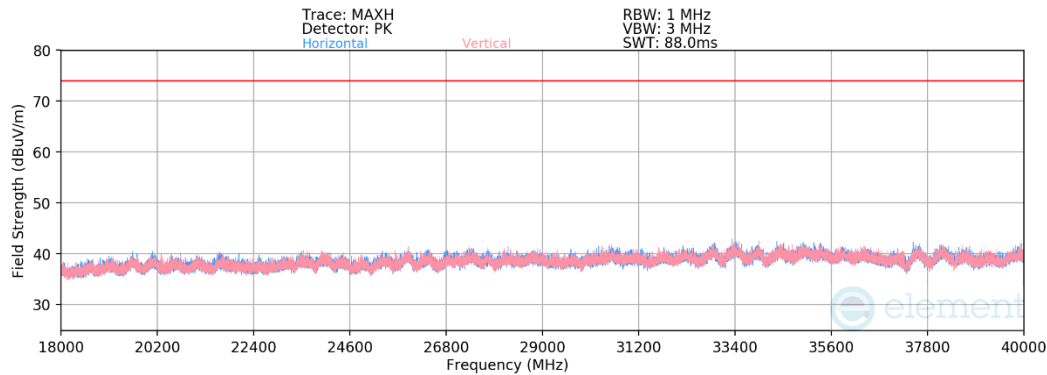

Plot 7-149. Radiated Spurious Emissions 18GHz – 40GHz CDD Diversity (802.11be(SU) – Ch. 40)


Mode: 802.11be(SU)
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	Peak	V	-	-	-72.66	16.99	0.00	51.33	68.23	-16.90
* 15600.00	Average	H	-	-	-85.46	24.91	0.00	46.45	53.98	-7.53
* 15600.00	Peak	H	-	-	-74.34	24.91	0.00	57.57	73.98	-16.41
* 20800.00	Average	V	-	-	-69.26	-7.57	-9.54	20.63	53.98	-33.35
* 20800.00	Peak	V	-	-	-57.65	-7.57	-9.54	32.24	73.98	-41.74
26000.00	Peak	H	-	-	-56.11	-5.88	-9.54	35.47	68.23	-32.76
* 31200.00	Average	V	-	-	-67.41	-3.74	-9.54	26.31	53.98	-27.67
* 31200.00	Peak	V	-	-	-55.58	-3.74	-9.54	38.14	73.98	-35.84

Table 7-154. Radiated Measurements CDD Diversity

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 170 of 261

V 11.0 05/2025

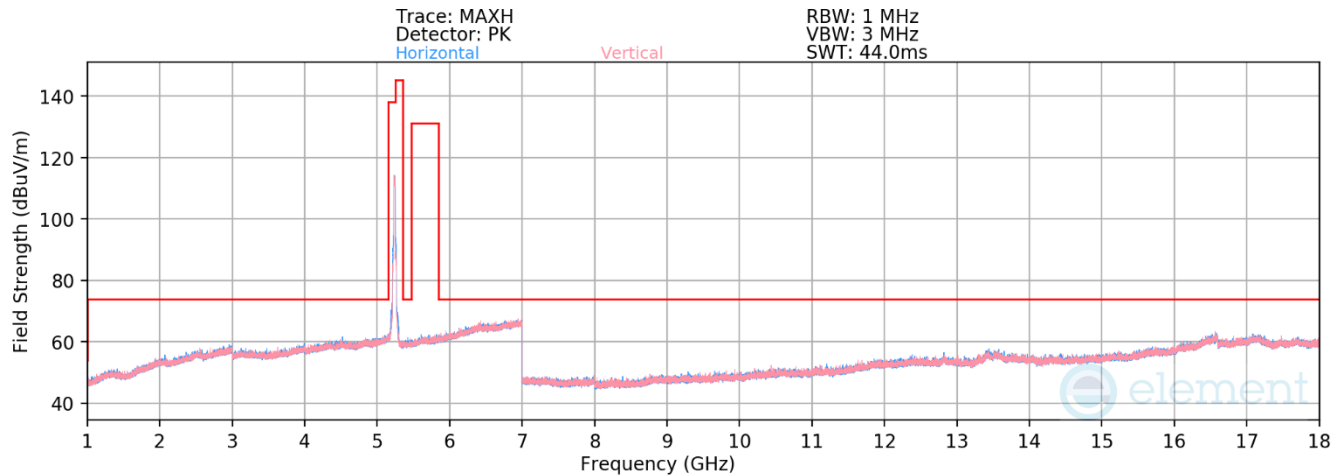

Plot 7-150. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be(SU) – Ch. 48)


Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10480.00	Peak	V	-	-	-73.07	17.77	51.70	68.23	-16.53
* 15720.00	Average	V	-	-	-85.49	25.25	46.76	53.98	-7.22
* 15720.00	Peak	V	-	-	-74.06	25.25	58.19	73.98	-15.79

Table 7-155. Radiated Measurements CDD Diversity

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 171 of 261

V 11.0 05/2025

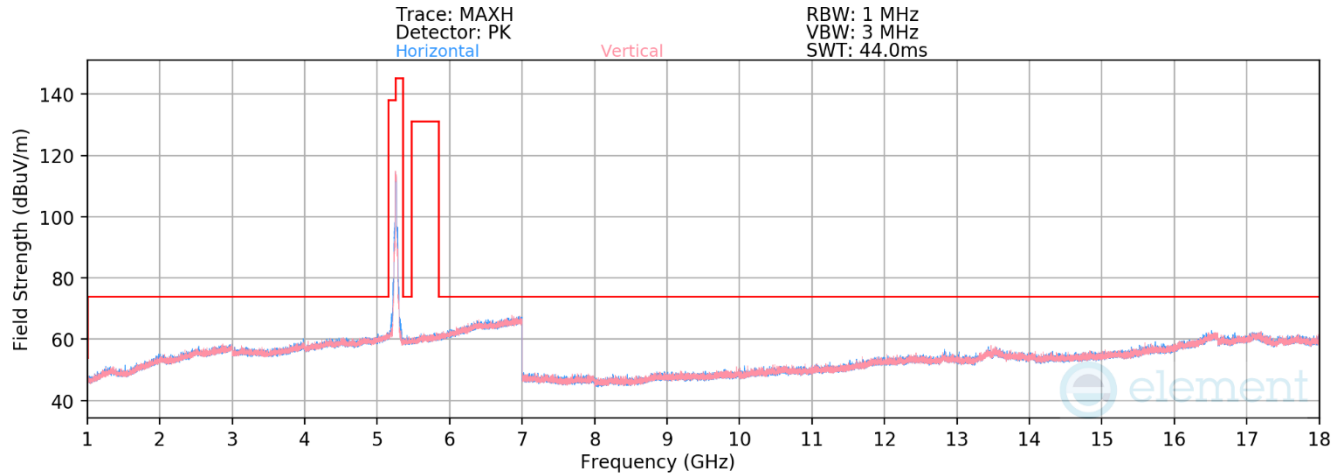

Plot 7-151. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be(SU) – Ch. 52)


Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5260MHz
Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	H	-	-	-73.22	17.44	51.22	68.23	-17.01
* 15780.00	Average	V	-	-	-85.72	25.64	46.92	53.98	-7.06
* 15780.00	Peak	V	-	-	-74.65	25.64	57.99	73.98	-15.99


Table 7-156. Radiated Measurements CDD Diversity

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 172 of 261

V 11.0 05/2025

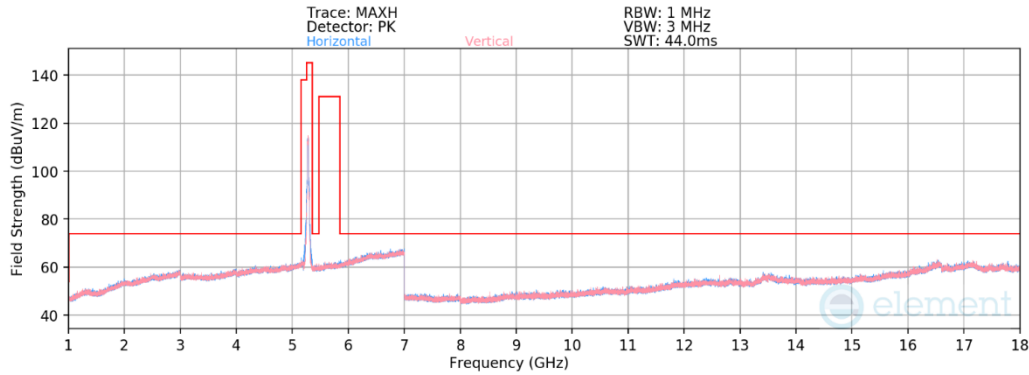

Plot 7-152. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be(SU) – Ch. 56)

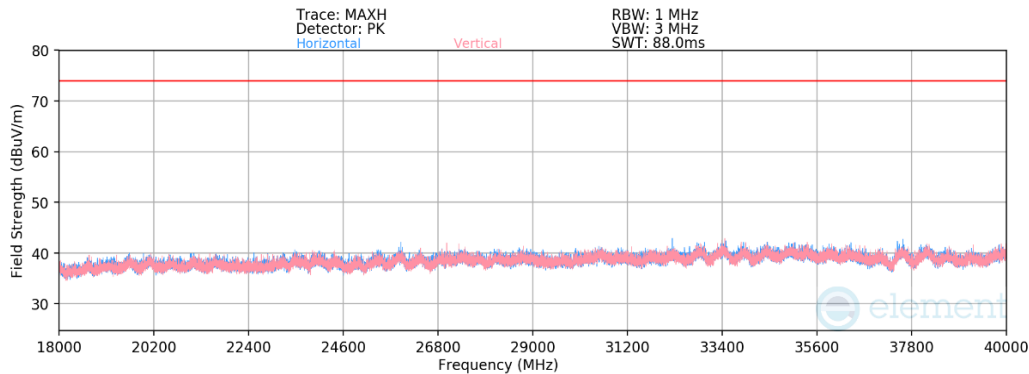


Plot 7-153. Radiated Spurious Emissions 18GHz – 40GHz CDD Diversity (802.11be(SU) – Ch.56)

Mode: 802.11be(SU)
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10560.00	Peak	V	-	-	-73.09	17.68	0.00	51.59	68.23	-16.64
* 15840.00	Average	H	-	-	-85.72	25.81	0.00	47.10	53.98	-6.88
* 15840.00	Peak	H	-	-	-74.58	25.81	0.00	58.23	73.98	-15.75
* 21120.00	Average	V	-	-	-68.17	-7.55	-9.54	21.74	53.98	-32.24
* 21120.00	Peak	V	-	-	-56.57	-7.55	-9.54	33.34	73.98	-40.64
26400.00	Peak	V	-	-	-56.20	-5.42	-9.54	35.84	68.23	-32.39
* 31680.00	Average	H	-	-	-67.32	-4.05	-9.54	26.09	53.98	-27.89
* 31680.00	Peak	H	-	-	-55.78	-4.09	-9.54	37.59	73.98	-36.39

Table 7-157. Radiated Measurements CDD Diversity

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 173 of 261

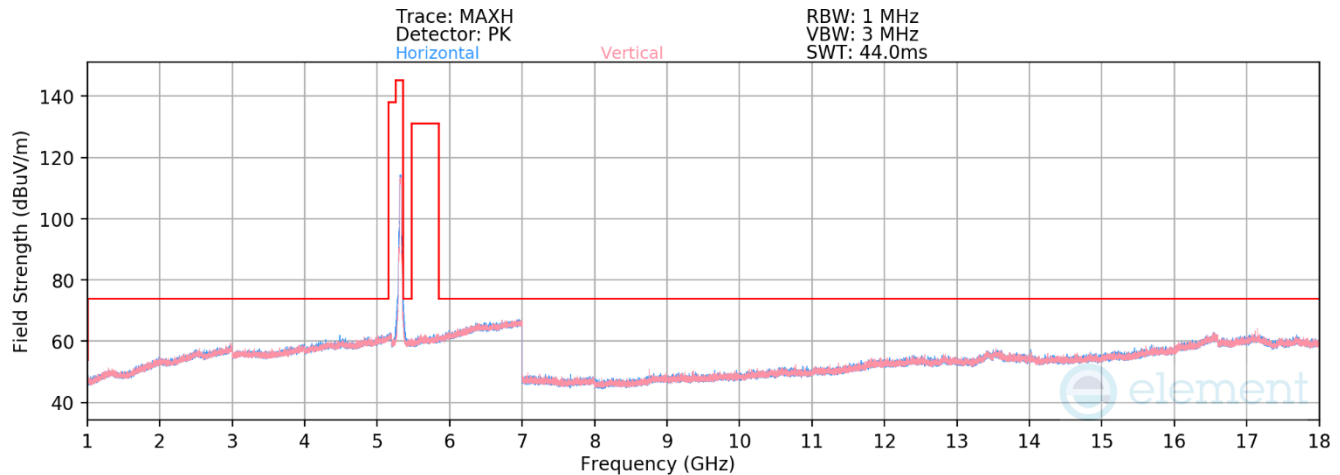

Plot 7-154. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be(SU) – Ch. 64)


Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5320MHz
Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 10640.00	Average	H	-	-	-84.84	18.23	40.39	53.98	-13.59
* 10640.00	Peak	H	-	-	-72.80	18.23	52.43	73.98	-21.55
* 15960.00	Average	V	-	-	-85.83	25.95	47.12	53.98	-6.86
* 15960.00	Peak	V	-	-	-74.41	25.95	58.54	73.98	-15.44

Table 7-158. Radiated Measurements CDD Diversity

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 174 of 261

V 11.0 05/2025

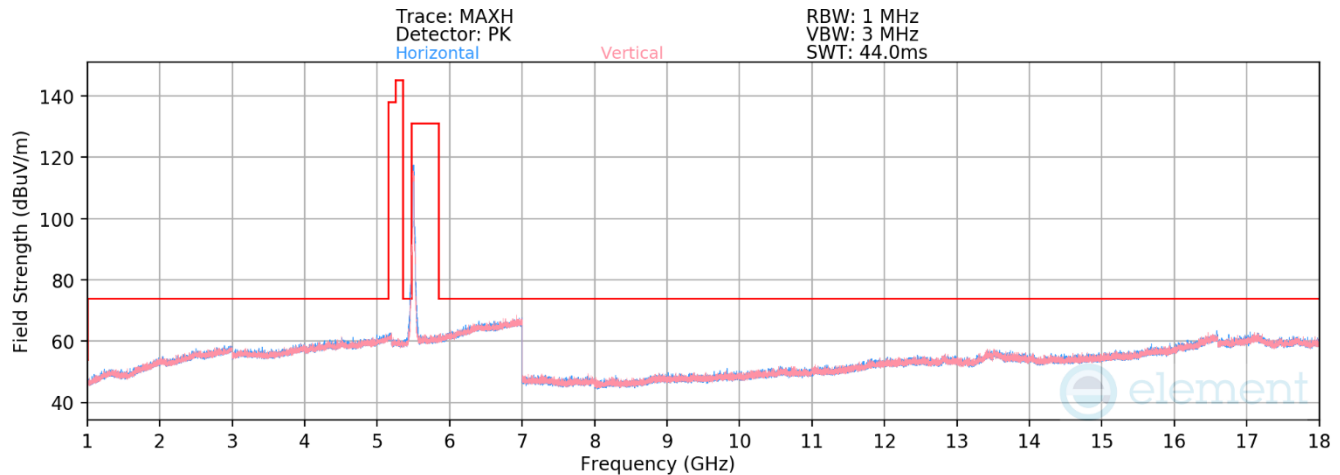

Plot 7-155. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be(SU) – Ch. 100)


Mode:	802.11be(SU)
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5500MHz
Channel:	100

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11000.00	Average	V	-	-	-84.55	18.23	40.67	53.98	-13.31
*	11000.00	Peak	V	-	-	-73.28	18.23	51.95	73.98	-22.03
	16500.00	Peak	V	-	-	-73.64	27.52	60.88	68.23	-7.35


Table 7-159. Radiated Measurements CDD Diversity

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 175 of 261

V 11.0 05/2025

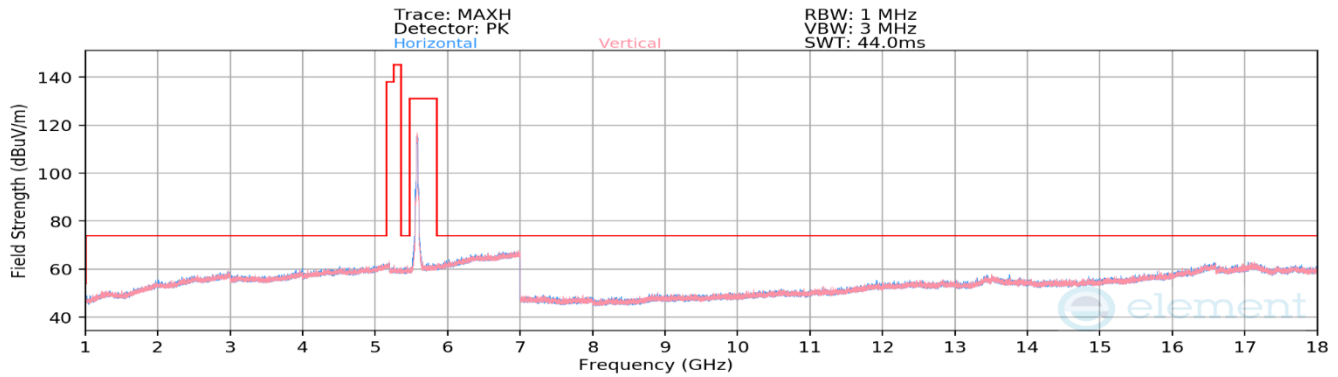

Plot 7-156. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be(SU) – Ch. 116)

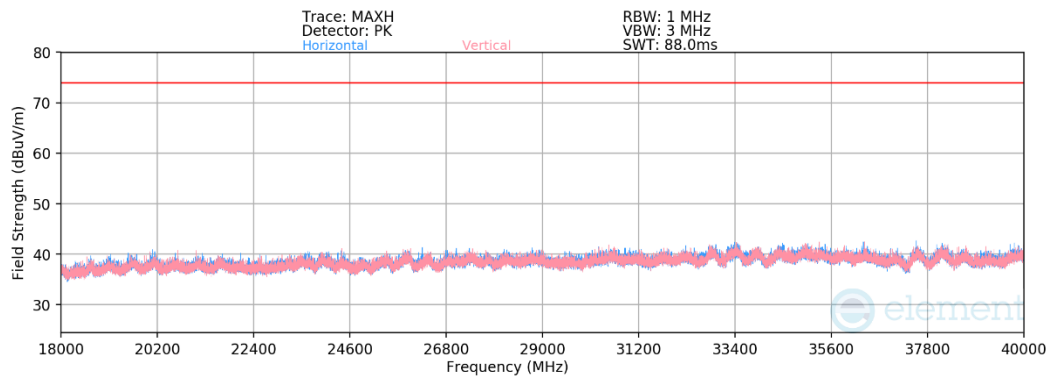


Plot 7-157. Radiated Spurious Emissions 18GHz – 40GHz CDD Diversity (802.11be(SU) – Ch.116)

Mode: 802.11be(SU)
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5580MHz
 Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	Average	H	-	-	-84.32	18.49	0.00	41.17	53.98	-12.81
* 11160.00	Peak	H	-	-	-73.39	18.49	0.00	52.10	73.98	-21.88
16740.00	Peak	V	-	-	-73.64	28.09	0.00	61.45	68.23	-6.78
* 22320.00	Average	H	-	-	-69.25	-7.57	-9.54	20.64	53.98	-33.34
* 22320.00	Peak	H	-	-	-57.34	-7.64	-9.54	32.48	73.98	-41.50
27900.00	Peak	V	-	-	-57.07	-4.75	-9.54	35.64	68.23	-32.59
33480.00	Peak	H	-	-	-55.03	-4.38	-9.54	38.05	68.23	-30.18

Table 7-160. Radiated Measurements CDD Diversity

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 176 of 261

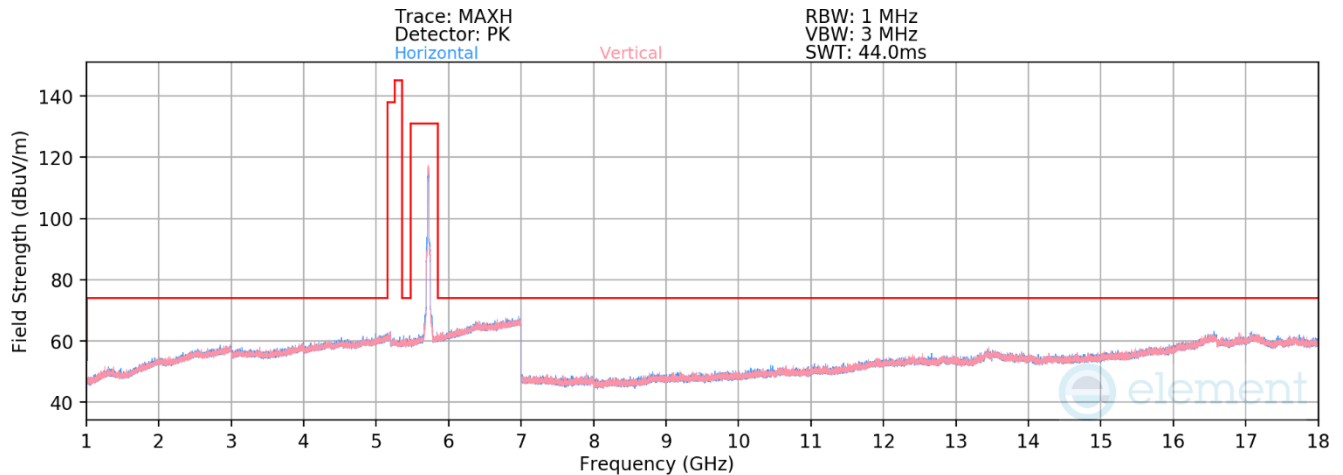

Plot 7-158. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be(SU) – Ch. 144)

Mode: 802.11be(SU)

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5720MHz


Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11440.00	Average	V	-	-	-84.75	18.81	41.06	53.98	-12.92
* 11440.00	Peak	V	-	-	-72.96	18.81	52.85	73.98	-21.13
17160.00	Peak	V	-	-	-72.99	28.13	62.14	68.23	-6.09

Table 7-161. Radiated Measurements CDD Diversity

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 177 of 261

V 11.0 05/2025

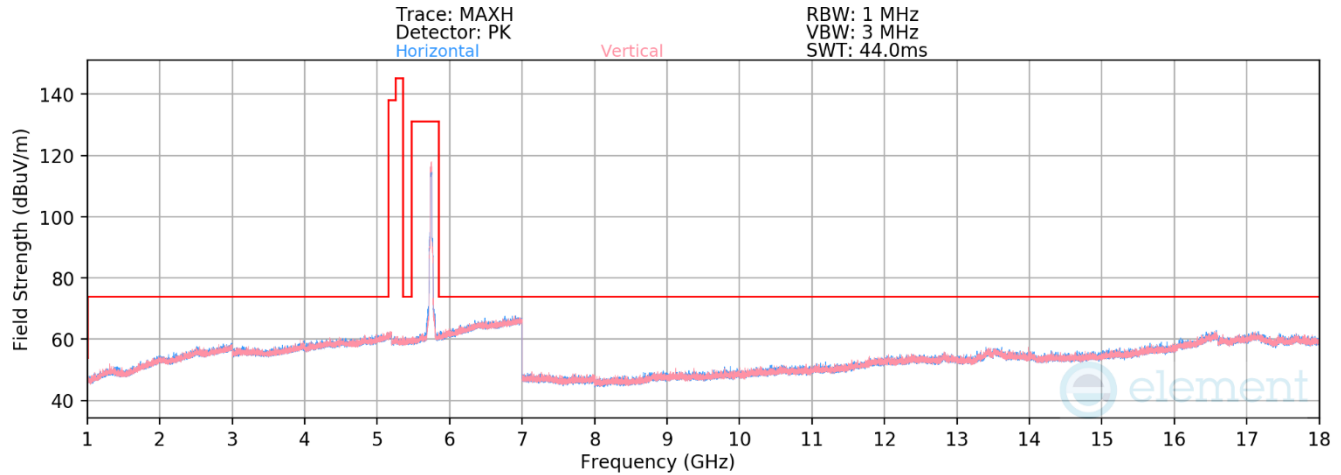

Plot 7-159. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be(SU) – Ch. 149)


Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11490.00	Average	V	-	-	-84.64	18.94	41.31	53.98	-12.67
* 11490.00	Peak	V	-	-	-73.20	18.94	52.74	73.98	-21.24
17235.00	Peak	V	-	-	-73.53	27.89	61.36	68.23	-6.87


Table 7-162. Radiated Measurements CDD Diversity

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 178 of 261

V 11.0 05/2025

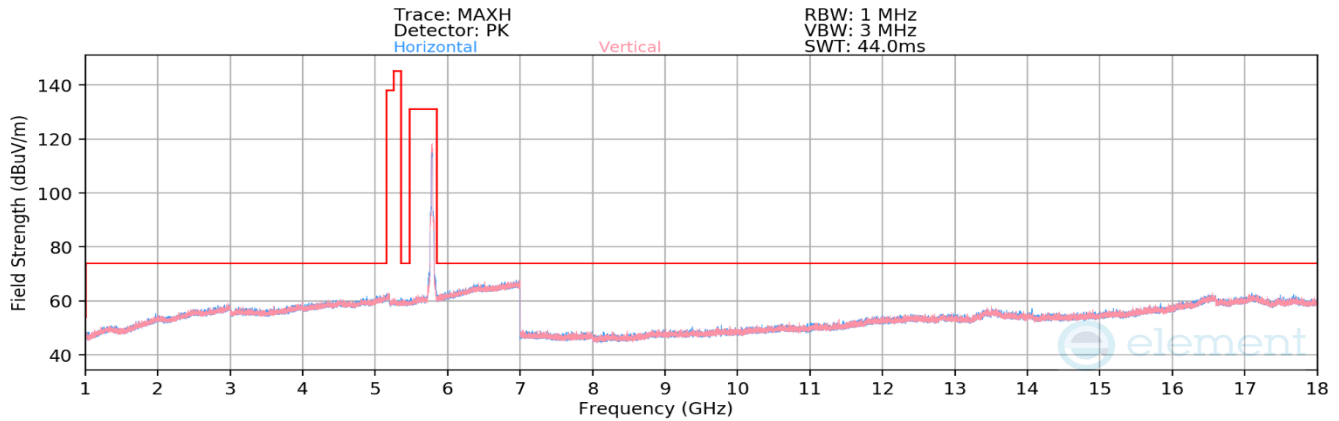

Plot 7-160. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be(SU) – Ch. 157)

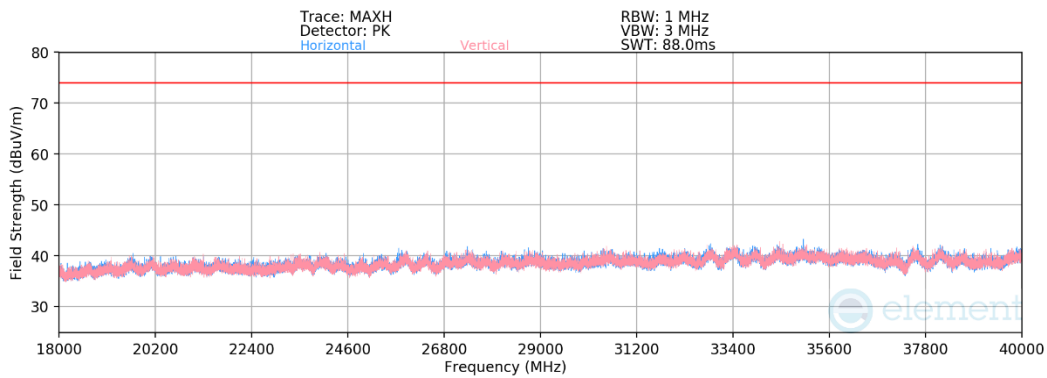


Plot 7-161. Radiated Spurious Emissions 18GHz – 40GHz CDD Diversity (802.11be(SU) – Ch.157)

Mode:	802.11be(SU)
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5785MHz
Channel:	157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11570.00	Average	H	-	-	-84.51	19.10	0.00	41.59	53.98	-12.39
* 11570.00	Peak	H	-	-	-72.67	19.10	0.00	53.43	73.98	-20.55
17355.00	Peak	H	-	-	-73.78	28.06	0.00	61.28	68.23	-6.95
23140.00	Peak	V	-	-	-58.35	-7.13	-9.54	31.98	68.23	-36.25
28925.00	Peak	H	-	-	-56.36	-3.95	-9.54	37.15	68.23	-31.08
34710.00	Peak	V	-	-	-55.94	-4.65	-9.54	36.87	68.23	-31.36

Table 7-163. Radiated Measurements CDD Diversity

FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 179 of 261

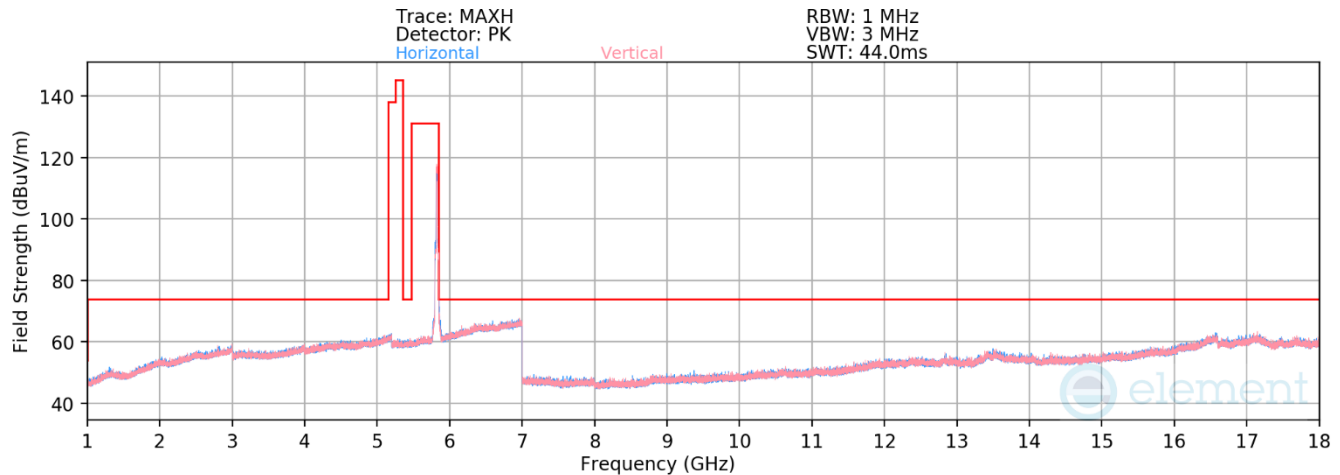

Plot 7-162. Radiated Spurious Emissions above 1GHz CDD Diversity (802.11be(SU) – Ch. 165)

Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	H	-	-	-84.54	19.48	41.94	53.98	-12.04
* 11650.00	Peak	H	-	-	-73.35	19.48	53.13	73.98	-20.85
17475.00	Peak	H	-	-	-74.88	28.82	60.95	68.23	-7.28

Table 7-164. Radiated Measurements CDD Diversity


FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 180 of 261

V 11.0 05/2025


7.6.4 Antenna 5T Radiated Band Edge Measurements (20MHz BW)

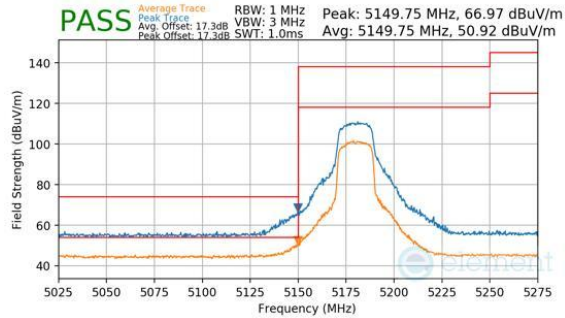


Plot 7-163. Antenna 5T (Peak & Average, Ch.36, 802.11n, MCS7)

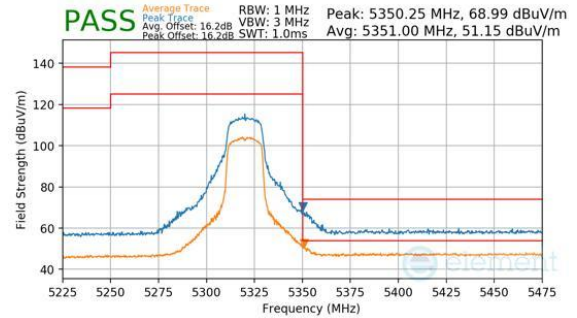


Plot 7-166. Antenna 5T (Peak & Average, Ch.64, 802.11n, MCS7)

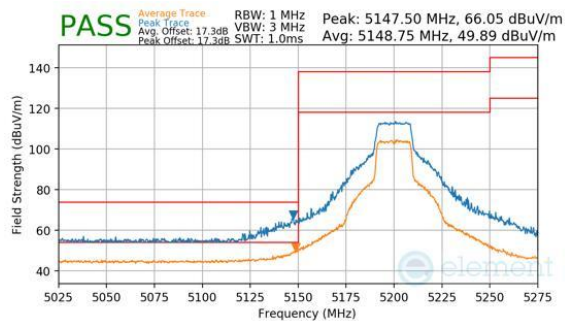


Plot 7-164. Antenna 5T (Peak & Average, Ch.40, 802.11n, MCS7)

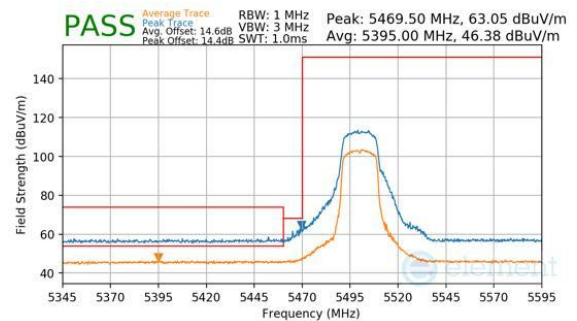

Plot 7-167. Antenna 5T (Peak & Average, Ch.100, 802.11n, MCS7)

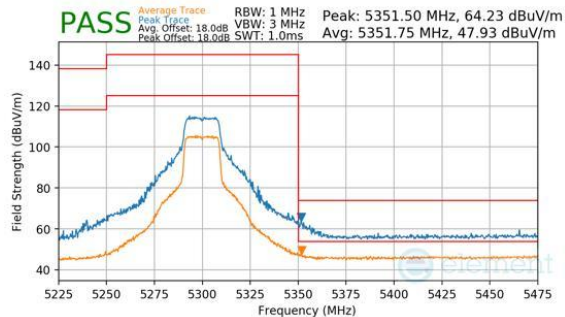

Plot 7-165. Antenna 5T (Peak & Average, Ch.60, 802.11n, MCS7)

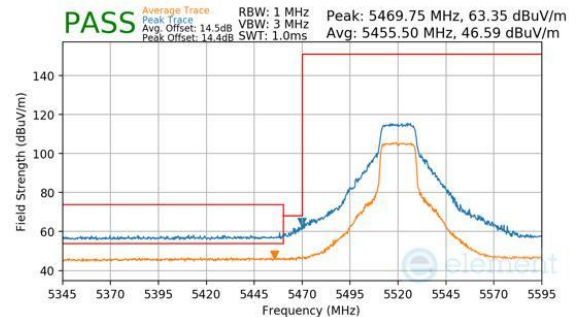


Plot 7-168. Antenna 5T (Peak & Average, Ch.104, 802.11n, MCS7)


FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device		Page 181 of 261

V 11.0 05/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

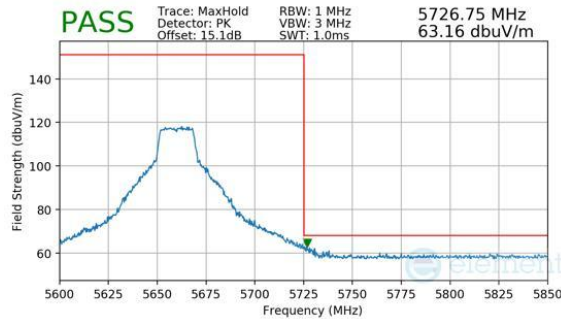


Plot 7-169. Antenna 5T (Peak, Ch.132, 802.11n, MCS7)

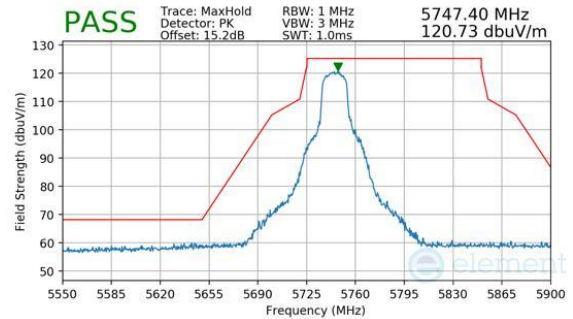


Plot 7-172. Antenna 5T (Peak, Ch.149, 802.11n, MCS7)

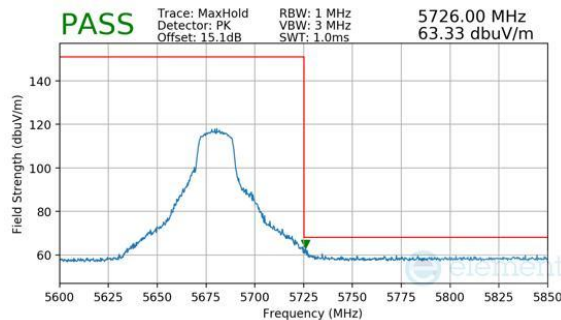


Plot 7-170. Antenna 5T (Peak, Ch.136, 802.11n, MCS7)

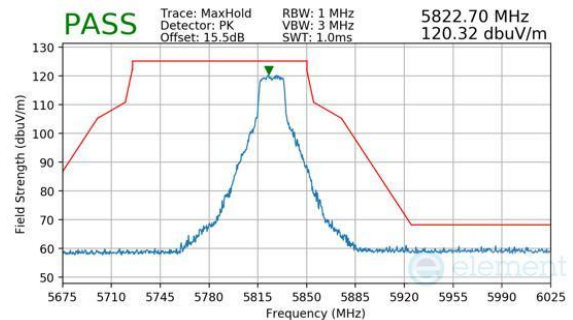

Plot 7-173. Antenna 5T (Peak, Ch.165, 802.11n, MCS7)

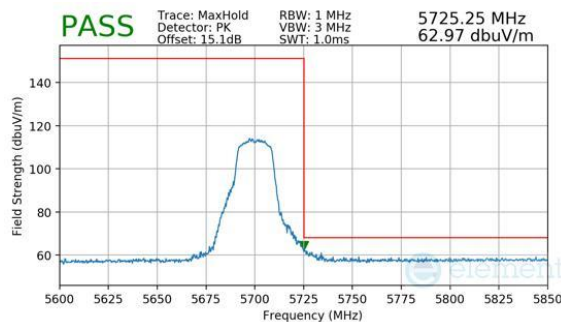


Plot 7-171. Antenna 5T (Peak, Ch.140, 802.11n, MCS7)

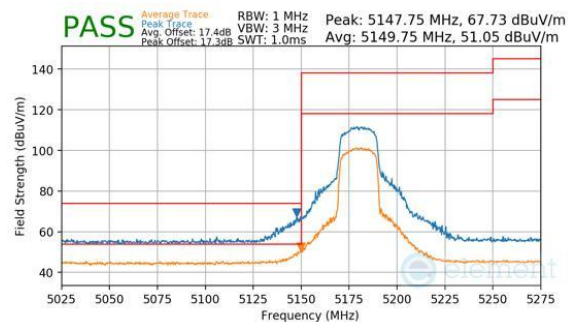


Plot 7-174. Antenna 5T (Peak & Average, Ch.36, 802.11be(SU), MCS11)


FCC ID: BCGA3462 IC: 579C-A3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 182 of 261

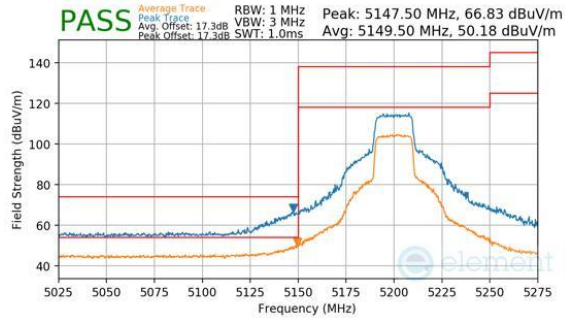


Plot 7-175. Antenna 5T (Peak & Average, Ch.40, 802.11be(SU), MCS11)

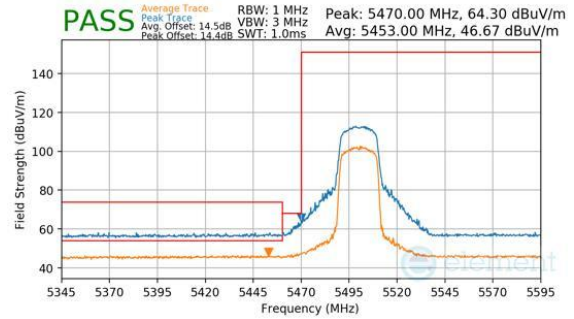


Plot 7-178. Antenna 5T (Peak & Average, Ch.100, 802.11be(SU), MCS11)

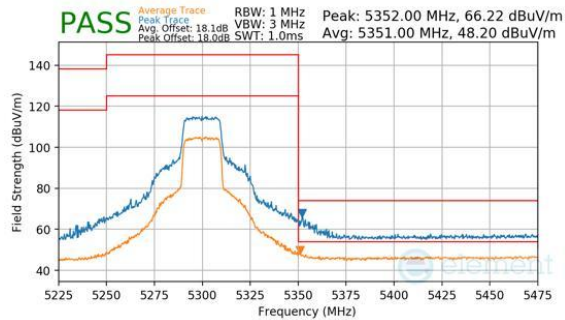


Plot 7-176. Antenna 5T (Peak & Average, Ch.60, 802.11be(SU), MCS11)

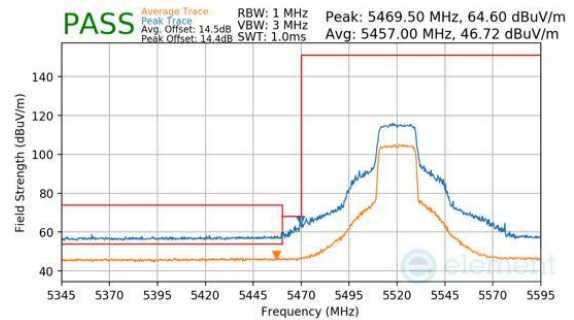

Plot 7-179. Antenna 5T (Peak & Average, Ch.104, 802.11be(SU), MCS11)

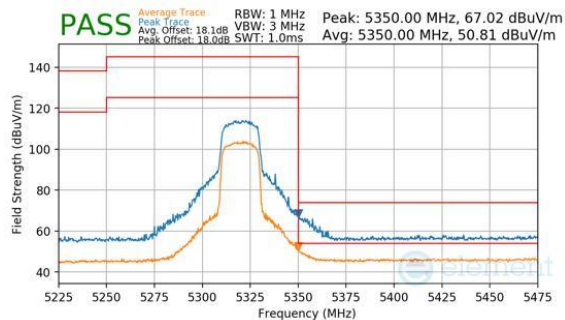


Plot 7-177. Antenna 5T (Peak & Average, Ch.64, 802.11be(SU), MCS11)

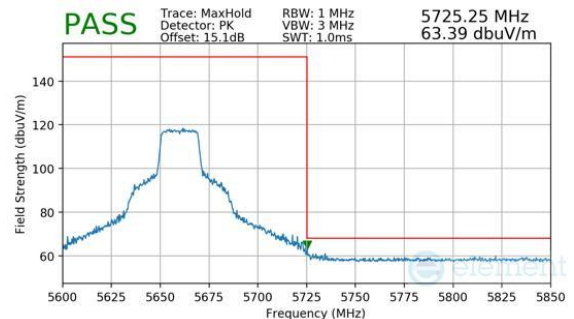


Plot 7-180. Antenna 5T (Peak, Ch.132, 802.11be(SU), MCS11)


FCC ID: BCGA3462 IC: 579C-A3462	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 183 of 261

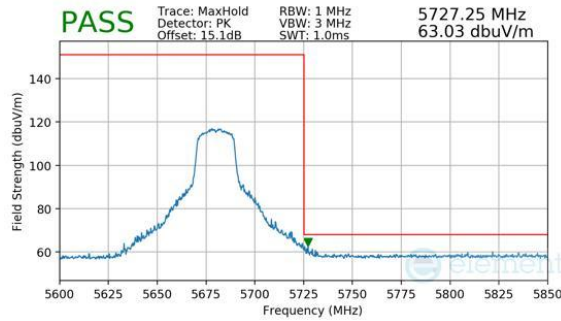


Plot 7-181. Antenna 5T (Peak, Ch.136, 802.11be(SU), MCS11)

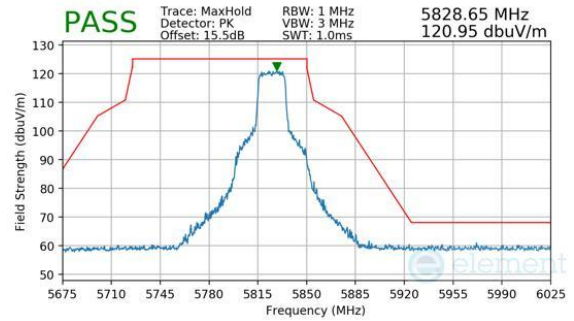

Plot 7-184. Antenna 5T (Peak, Ch.165, 802.11be(SU), MCS11)

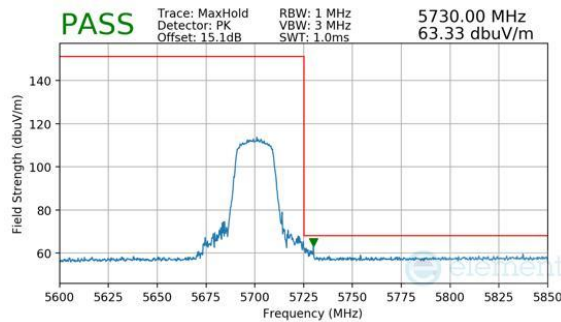

Plot 7-182. Antenna 5T (Peak, Ch.140, 802.11be(SU), MCS11)

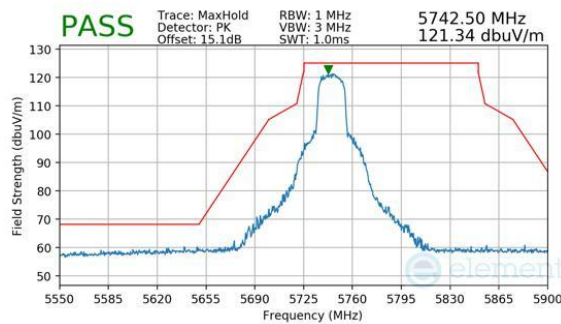

Plot 7-183. Antenna 5T (Peak, Ch.149, 802.11be(SU), MCS11)

FCC ID: BCGA3462 IC: 579C-A3462	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-22-R2.BCG	Test Dates: 08/22/2025 - 1/19/2025	EUT Type: Tablet Device	Page 184 of 261

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.