


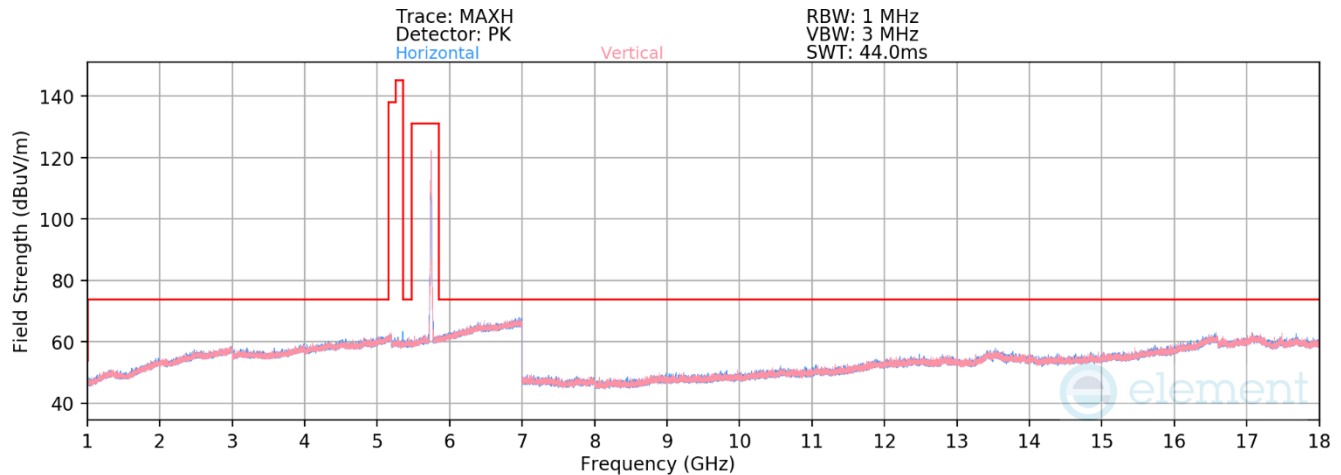

**Plot 7-280. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.149 – RU26)**


Mode: 802.11be (20MHz BW)  
 Data Rate: MCS0  
 RU Index: 4  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5745MHz  
 Channel: 149

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 11490.00      | Average  | V               | -                   | -                          | -84.90               | 19.09       | 41.19                   | 53.98          | -12.79      |
| * 11490.00      | Peak     | V               | -                   | -                          | -73.78               | 19.09       | 52.31                   | 73.98          | -21.67      |
| 17235.00        | Peak     | H               | -                   | -                          | -73.59               | 27.89       | 61.31                   | 68.23          | -6.92       |


**Table 7-204. Radiated Measurements CDD Primary (RU26)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 160 of 380                   |

V 10.6 10/27/2023

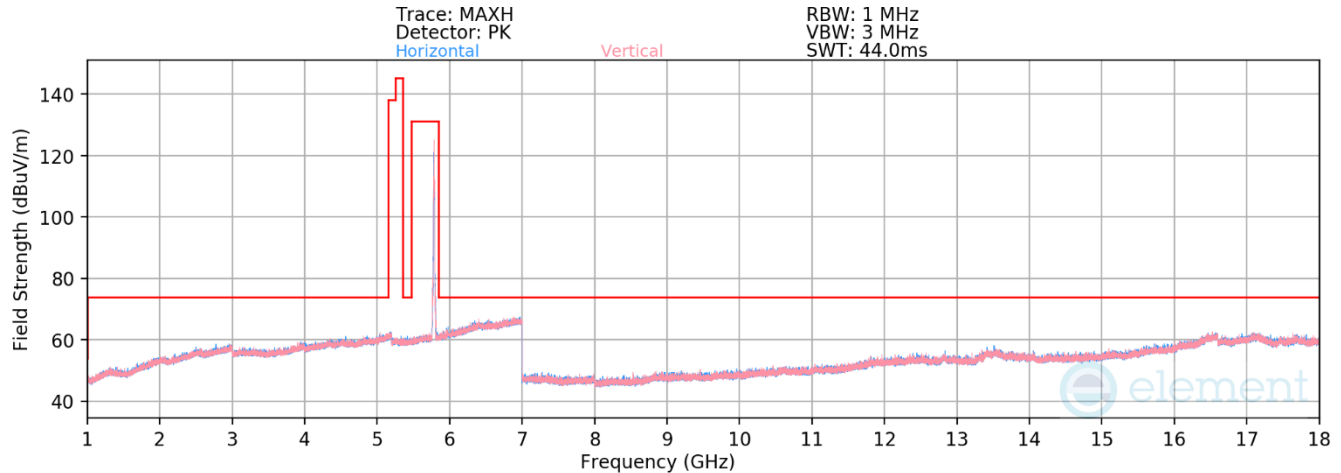

**Plot 7-281. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.157 – RU26)**

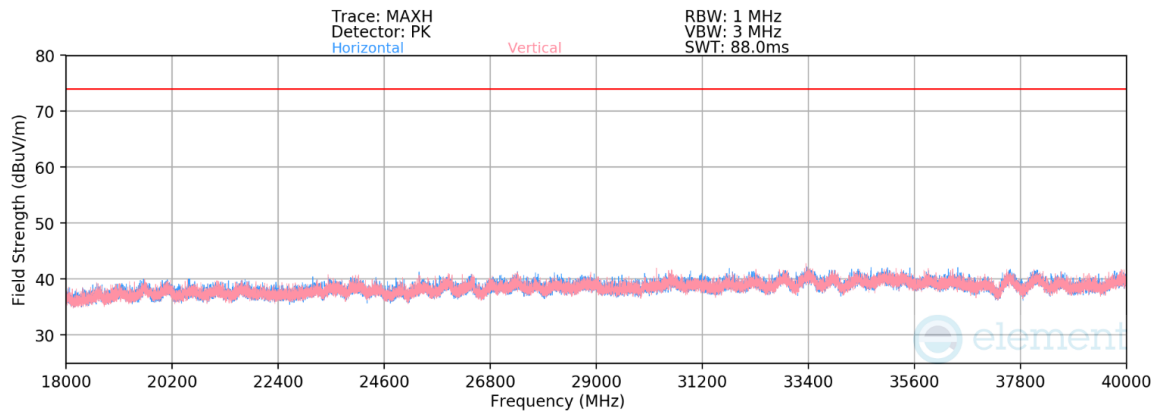

**Plot 7-282. Radiated Spurious Emissions 18 GHz - 40GHz CDD Primary (11be Ch.157 — RU26)**


|                           |                     |
|---------------------------|---------------------|
| Mode:                     | 802.11be (20MHz BW) |
| Data Rate:                | MCS0                |
| RU Index:                 | 4                   |
| Distance of Measurements: | 3 Meters            |
| Operating Frequency:      | 5785MHz             |
| Channel:                  | 157                 |

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dBm] | Distance Correction Factor [dB] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|------------|---------------------------------|-------------------------|----------------|-------------|
| 11570.00        | Average  | H               | -                   | -                          | -84.51               | 19.10      | 0.00                            | 41.58                   | 53.98          | -12.40      |
| 11570.00        | Peak     | H               | -                   | -                          | -73.50               | 19.10      | 0.00                            | 52.60                   | 73.98          | -21.38      |
| 17355.00        | Peak     | H               | -                   | -                          | -73.79               | 27.58      | 0.00                            | 60.79                   | 68.23          | -7.44       |
| 23140.00        | Peak     | H               | -                   | -                          | -51.21               | -7.12      | -9.54                           | 39.13                   | 68.23          | -29.10      |
| 28925.00        | Peak     | H               | -                   | -                          | -52.44               | -3.99      | -9.54                           | 41.04                   | 68.23          | -27.19      |
| 34710.00        | Peak     | V               | -                   | -                          | -51.11               | -4.70      | -9.54                           | 41.64                   | 68.23          | -26.59      |

**Table 7-205. Radiated Measurements CDD Primary (RU26)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 161 of 380                   |

V 10.6 10/27/2023

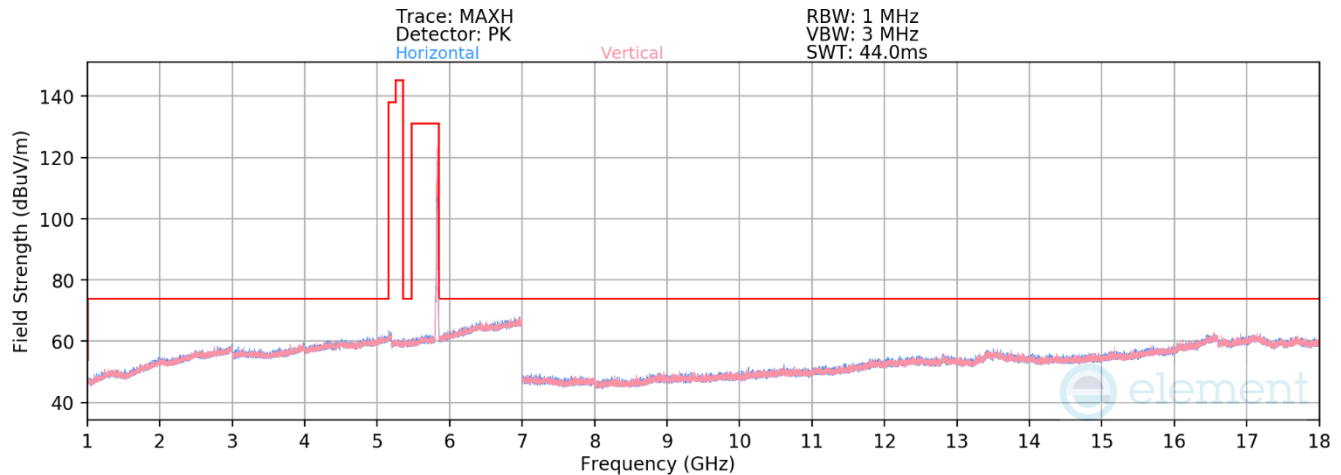

**Plot 7-283. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.165 – RU26)**

Mode: 802.11be (20MHz BW)  
 Data Rate: MCS0  
 RU Index: 4  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165


| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 11650.00      | Average  | V               | -                   | -                          | -84.56               | 19.48       | 41.92                   | 53.98          | -12.06      |
| * 11650.00      | Peak     | V               | -                   | -                          | -73.18               | 19.48       | 53.30                   | 73.98          | -20.68      |
| 17475.00        | Peak     | H               | -                   | -                          | -74.08               | 28.82       | 61.74                   | 68.23          | -6.49       |

**Table 7-206. Radiated Measurements CDD Primary (RU26)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 162 of 380                   |

V 10.6 10/27/2023

## RU242

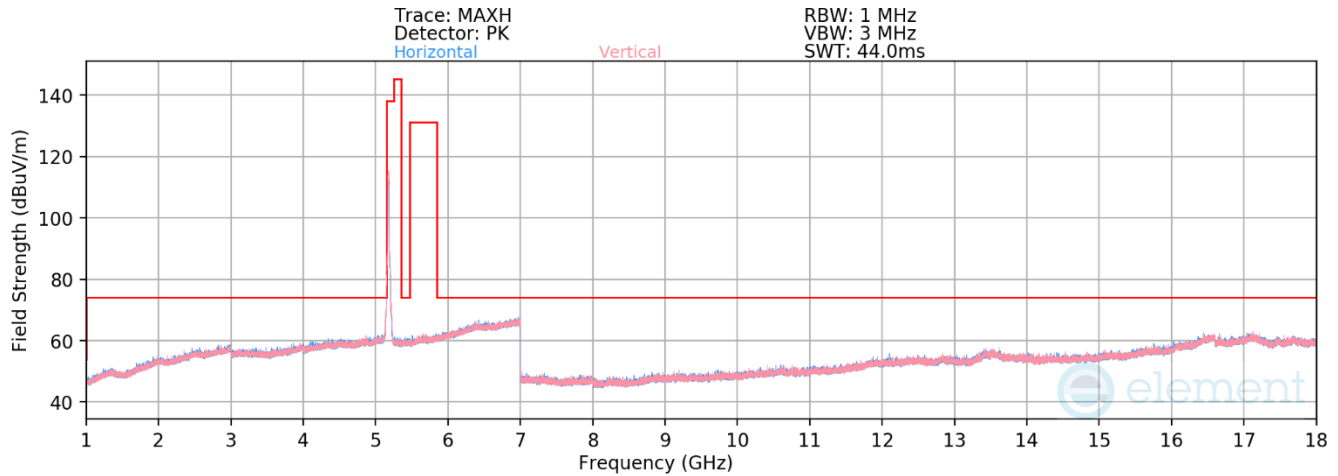

**Plot 7-284. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.36 – RU242)**


Mode: 11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 5180MHz  
Channel: 36

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 10360.00        | Peak     | V               | -                   | -                          | -72.87               | 16.98       | 51.11                   | 68.23          | -17.12      |
| * 15540.00      | Average  | H               | -                   | -                          | -85.40               | 24.96       | 46.57                   | 53.98          | -7.41       |
| * 15540.00      | Peak     | H               | -                   | -                          | -73.31               | 24.96       | 58.66                   | 73.98          | -15.32      |


**Table 7-207. Radiated Measurements CDD Primary (RU242)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 163 of 380                   |

V 10.6 10/27/2023

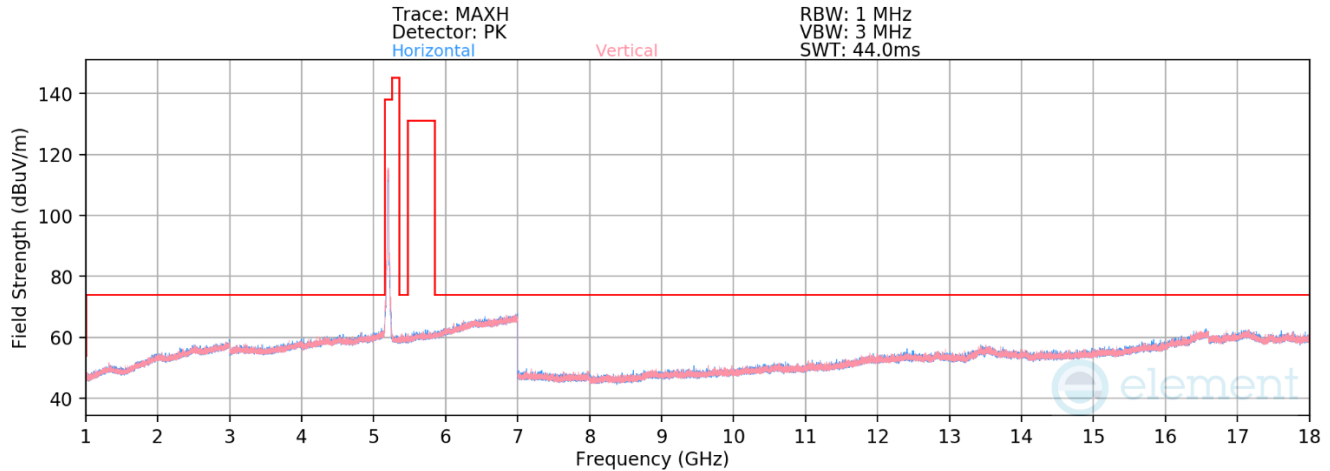

**Plot 7-285. Radiated Spurious Emissions above 1GHz CDD Primary (11be - Ch.40 - RU242)**

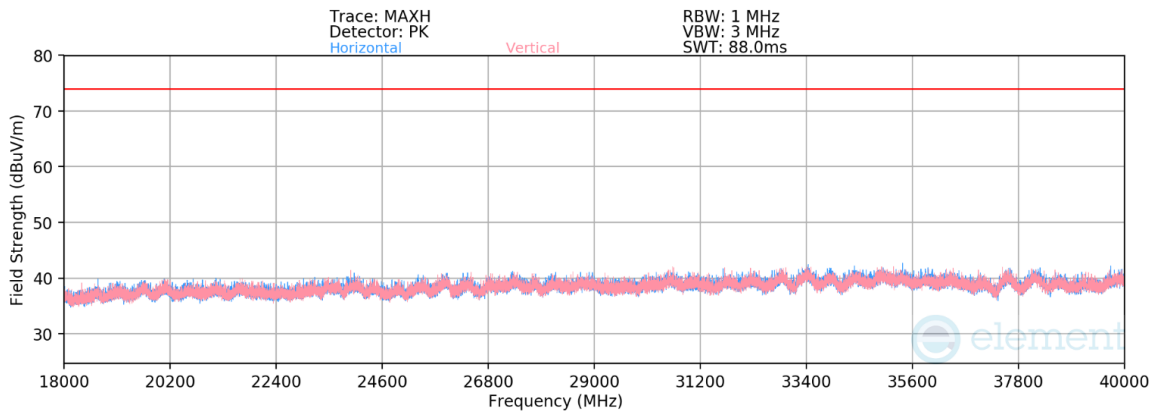

**Plot 7-286. Radiated Spurious Emissions 18 GHz - 40GHz CDD Primary (11be Ch.40 - RU242)**


Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 5200MHz  
Channel: 40

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10400.00        | Peak     | V               | -                   | -                          | -72.74               | 16.99       | 0.00                            | 51.25                   | 68.23          | -16.98      |
| * 15600.00      | Average  | H               | -                   | -                          | -85.14               | 24.98       | 0.00                            | 46.84                   | 53.98          | -7.14       |
| * 15600.00      | Peak     | H               | -                   | -                          | -74.40               | 24.98       | 0.00                            | 57.58                   | 73.98          | -16.40      |
| * 20800.00      | Average  | H               | -                   | -                          | -69.11               | -7.57       | -9.54                           | 20.78                   | 53.98          | -33.20      |
| * 20800.00      | Peak     | H               | -                   | -                          | -57.25               | -7.57       | -9.54                           | 32.64                   | 73.98          | -41.34      |
| 26000.00        | Peak     | V               | -                   | -                          | -56.44               | -5.88       | -9.54                           | 35.14                   | 68.23          | -33.09      |
| * 31200.00      | Average  | H               | -                   | -                          | -67.11               | -3.74       | -9.54                           | 26.61                   | 53.98          | -27.37      |
| * 31200.00      | Peak     | H               | -                   | -                          | -56.16               | -3.74       | -9.54                           | 37.56                   | 73.98          | -36.42      |

**Table 7-208. Radiated Measurements CDD Primary (RU242)**

|                                            |                                                                                     |                                               |  |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------|--|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |  | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device                    |  | Page 164 of 380                   |

V 10.6 10/27/2023

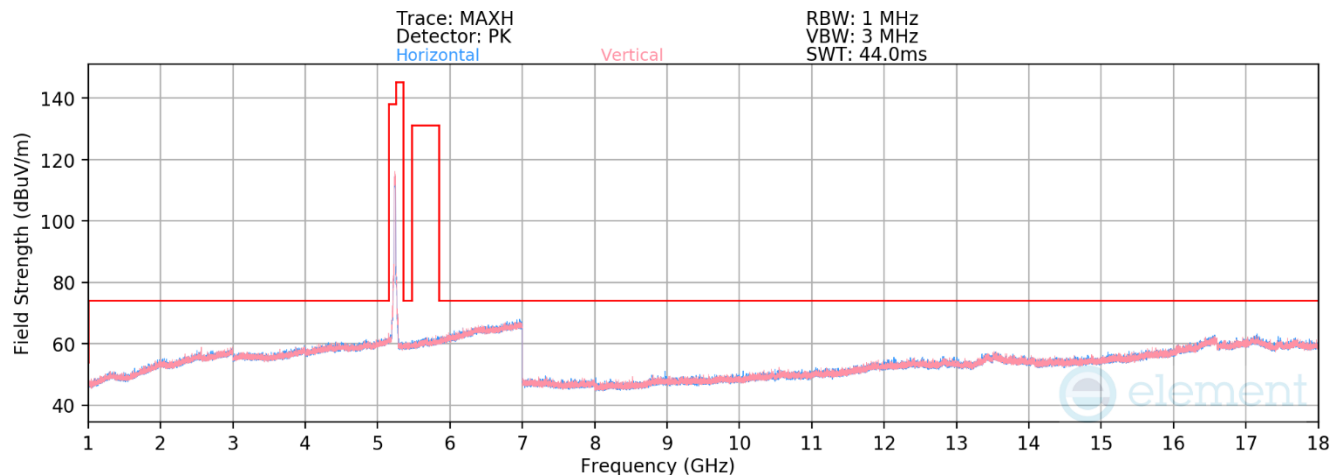

**Plot 7-287. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.48 – RU242)**


Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 5240MHz  
Channel: 48

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 10480.00        | Peak     | V               | -                   | -                          | -72.66               | 17.66       | 51.99                   | 68.23          | -16.24      |
| * 15720.00      | Average  | V               | -                   | -                          | -85.98               | 25.65       | 46.67                   | 53.98          | -7.31       |
| * 15720.00      | Peak     | V               | -                   | -                          | -74.11               | 25.65       | 58.54                   | 73.98          | -15.44      |

**Table 7-209. Radiated Measurements CDD Primary (RU242)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 165 of 380                   |

V 10.6 10/27/2023

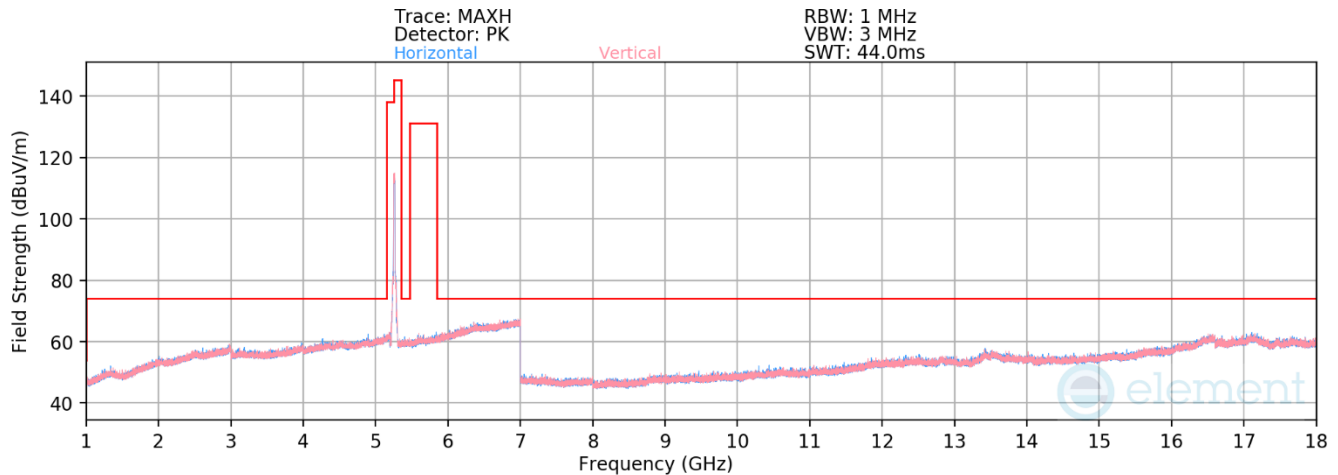

**Plot 7-288. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.52 – RU242)**


Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 5260MHz  
Channel: 52

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 10520.00        | Peak     | V               | -                   | -                          | -73.13               | 17.53       | 51.40                   | 68.23          | -16.83      |
| * 15780.00      | Average  | V               | -                   | -                          | -85.76               | 25.60       | 46.85                   | 53.98          | -7.13       |
| * 15780.00      | Peak     | V               | -                   | -                          | -74.29               | 25.60       | 58.31                   | 73.98          | -15.67      |


**Table 7-210. Radiated Measurements CDD Primary (RU242)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 166 of 380                   |

V 10.6 10/27/2023

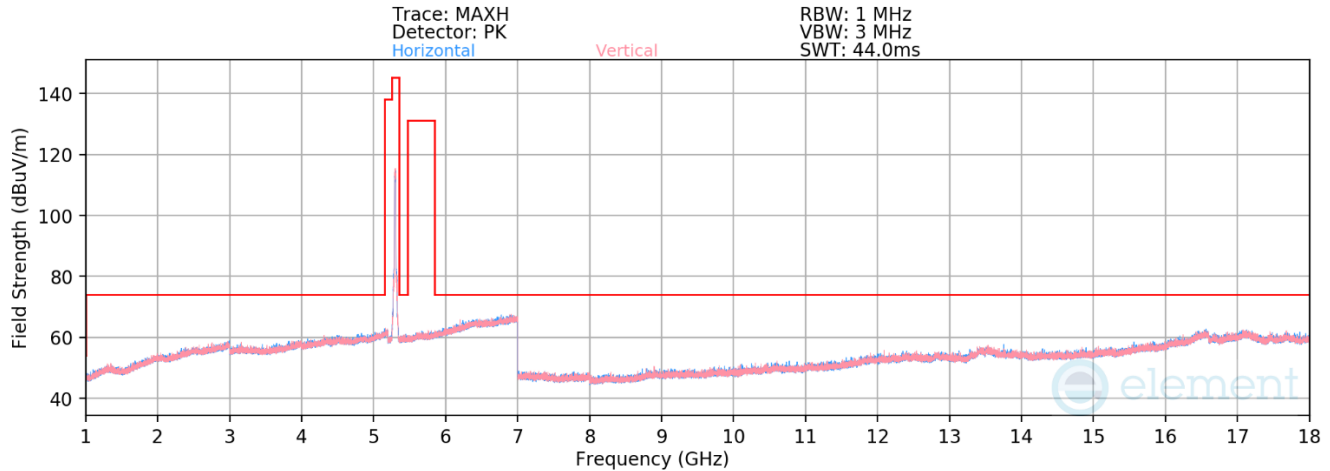

**Plot 7-289. Radiated Spurious Emissions above 1GHz CDD Primary (11be - Ch.56 - RU242)**

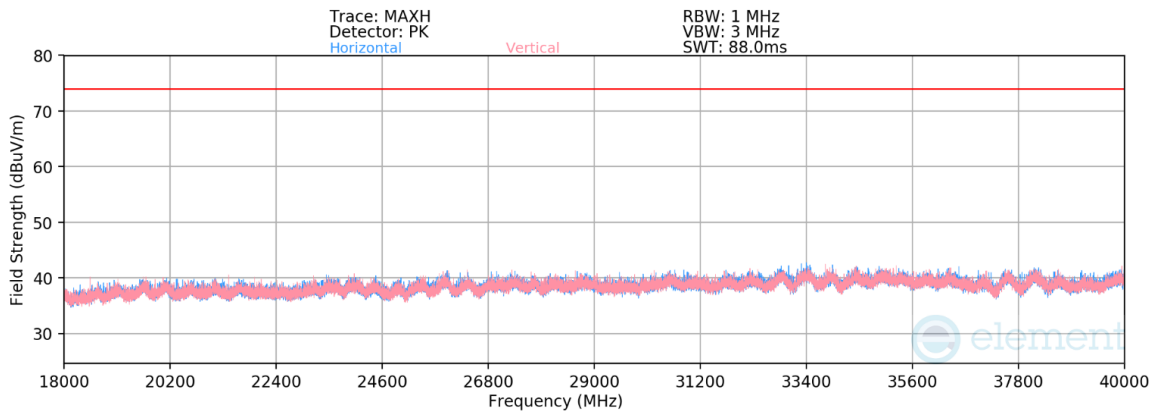

**Plot 7-290. Radiated Spurious Emissions 18 GHz - 40GHz CDD Primary (11be Ch.56 - RU242)**

Mode: 802.11be (20MHz BW)

Data Rate: MCS0

RU Index: 61

Distance of Measurements: 3 Meters

Operating Frequency: 5280MHz


Channel: 56

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10560.00        | Peak     | V               | -                   | -                          | -73.23               | 17.98       | 0.00                            | 51.75                   | 68.23          | -16.49      |
| * 15840.00      | Average  | H               | -                   | -                          | -85.30               | 25.73       | 0.00                            | 47.43                   | 53.98          | -6.55       |
| * 15840.00      | Peak     | H               | -                   | -                          | -74.06               | 25.73       | 0.00                            | 58.67                   | 73.98          | -15.31      |
| * 21120.00      | Average  | V               | -                   | -                          | -68.22               | -7.55       | -9.54                           | 21.69                   | 53.98          | -32.29      |
| * 21120.00      | Peak     | V               | -                   | -                          | -56.92               | -7.55       | -9.54                           | 32.99                   | 73.98          | -40.99      |
| 26400.00        | Peak     | V               | -                   | -                          | -56.03               | -5.30       | -9.54                           | 36.13                   | 68.23          | -32.10      |
| * 31680.00      | Average  | V               | -                   | -                          | -67.61               | -4.05       | -9.54                           | 25.80                   | 53.98          | -28.18      |
| * 31680.00      | Peak     | V               | -                   | -                          | -55.18               | -4.05       | -9.54                           | 38.23                   | 73.98          | -35.75      |

**Table 7-211. Radiated Measurements CDD Primary (RU242)**

|                                            |                                                                                     |                                               |  |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------|--|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |  | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device                    |  | Page 167 of 380                   |

V 10.6 10/27/2023

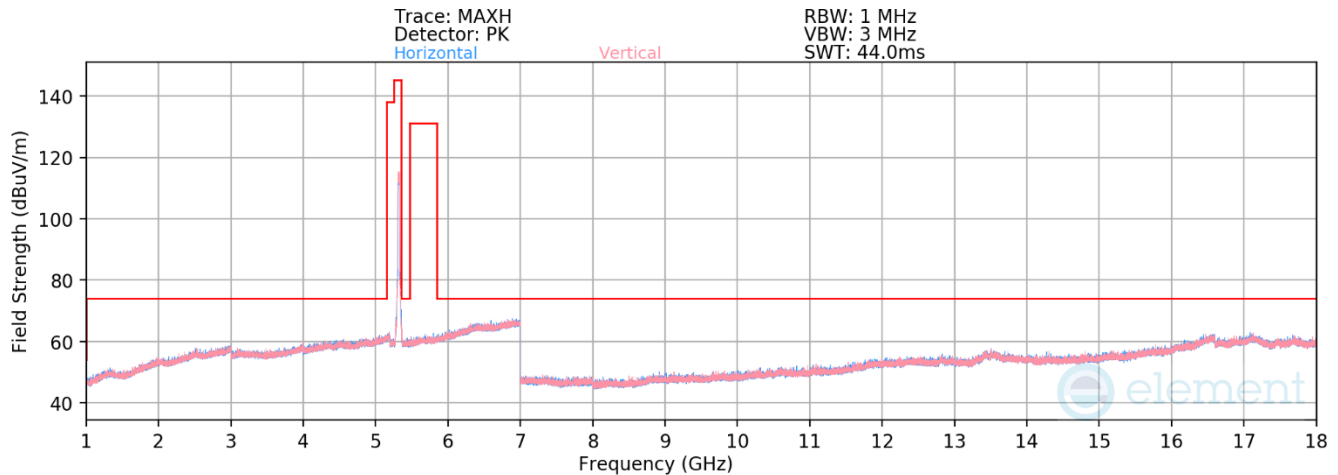

**Plot 7-291. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.64 – RU242)**


Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 5320MHz  
Channel: 64

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 10640.00      | Average  | V               | -                   | -                          | -84.52               | 18.13       | 40.61                   | 53.98          | -13.37      |
| * 10640.00      | Peak     | V               | -                   | -                          | -72.30               | 18.13       | 52.83                   | 73.98          | -21.15      |
| * 15960.00      | Average  | H               | -                   | -                          | -85.79               | 25.95       | 47.17                   | 53.98          | -6.81       |
| * 15960.00      | Peak     | H               | -                   | -                          | -73.83               | 25.95       | 59.12                   | 73.98          | -14.86      |

**Table 7-212. Radiated Measurements CDD Primary (RU242)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 168 of 380                   |

V 10.6 10/27/2023

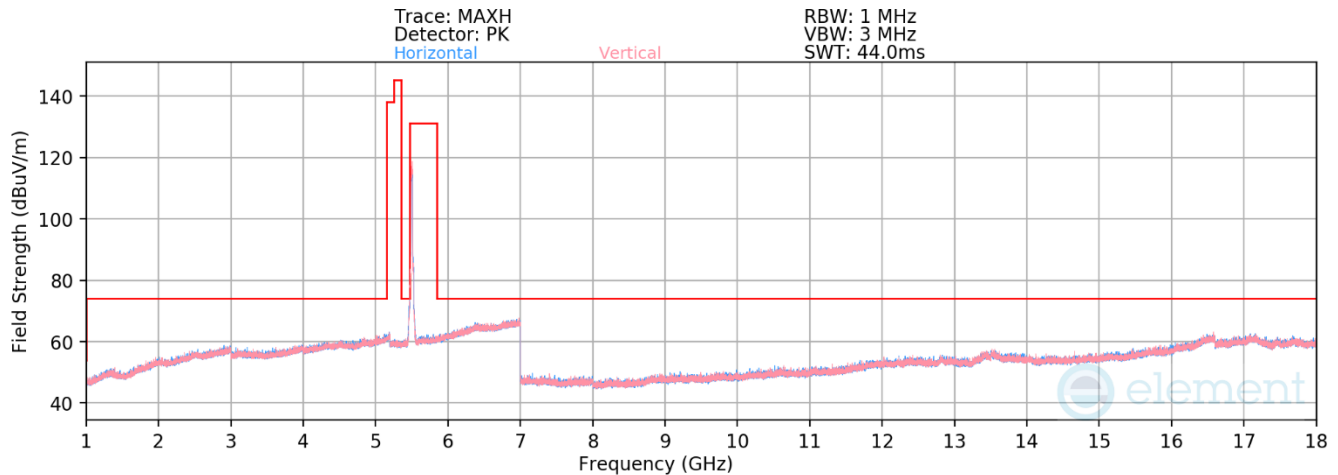

**Plot 7-292. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.100 – RU242)**


Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 5500MHz  
Channel: 100

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 11000.00      | Average  | V               | -                   | -                          | -84.48               | 18.09       | 40.60                   | 53.98          | -13.38      |
| * 11000.00      | Peak     | V               | -                   | -                          | -72.97               | 18.09       | 52.11                   | 73.98          | -21.87      |
| 16500.00        | Peak     | H               | -                   | -                          | -73.69               | 27.53       | 60.84                   | 68.23          | -7.39       |


**Table 7-213. Radiated Measurements CDD Primary (RU242)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 169 of 380                   |

V 10.6 10/27/2023

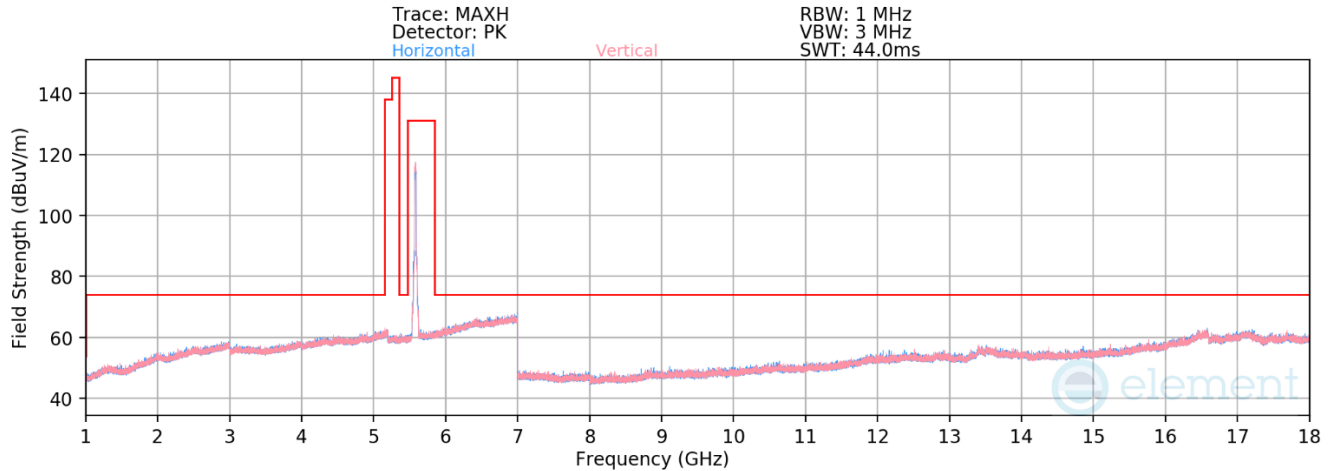

**Plot 7-293. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.116 – RU242)**

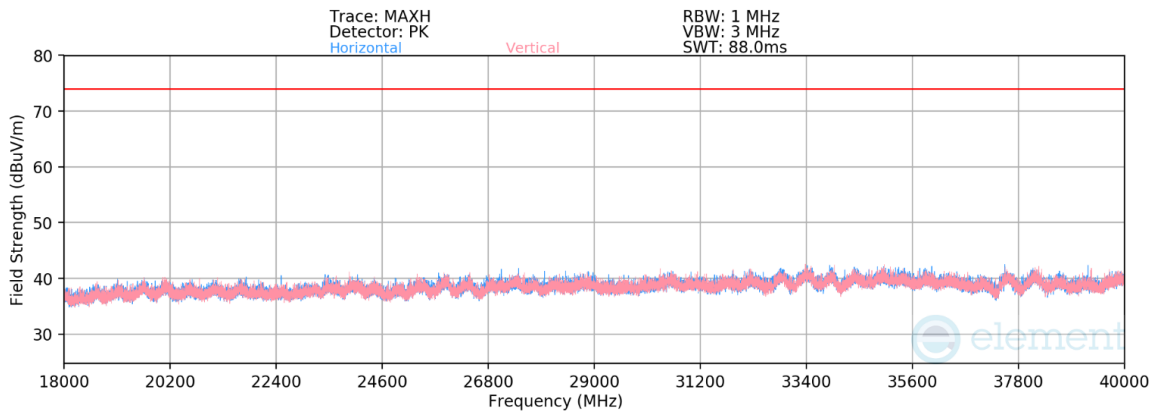

**Plot 7-294. Radiated Spurious Emissions 18 GHz - 40GHz CDD Primary (11be Ch.116 — RU242)**


Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 5580MHz  
Channel: 116

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11160.00      | Average  | H               | -                   | -                          | -84.79               | 18.84       | 0.00                            | 41.05                   | 53.98          | -12.93      |
| * 11160.00      | Peak     | H               | -                   | -                          | -73.06               | 18.84       | 0.00                            | 52.78                   | 73.98          | -21.20      |
| 16740.00        | Peak     | H               | -                   | -                          | -72.91               | 27.77       | 0.00                            | 61.86                   | 68.23          | -6.38       |
| * 22320.00      | Average  | V               | -                   | -                          | -69.19               | -7.57       | -9.54                           | 20.70                   | 53.98          | -33.28      |
| * 22320.00      | Peak     | V               | -                   | -                          | -56.92               | -7.64       | -9.54                           | 32.90                   | 73.98          | -41.08      |
| 27900.00        | Peak     | H               | -                   | -                          | -57.10               | -4.75       | -9.54                           | 35.61                   | 68.23          | -32.63      |
| 33480.00        | Peak     | H               | -                   | -                          | -54.97               | -4.28       | -9.54                           | 38.21                   | 68.23          | -30.02      |

**Table 7-214. Radiated Measurements CDD Primary (RU242)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 170 of 380                   |

V 10.6 10/27/2023

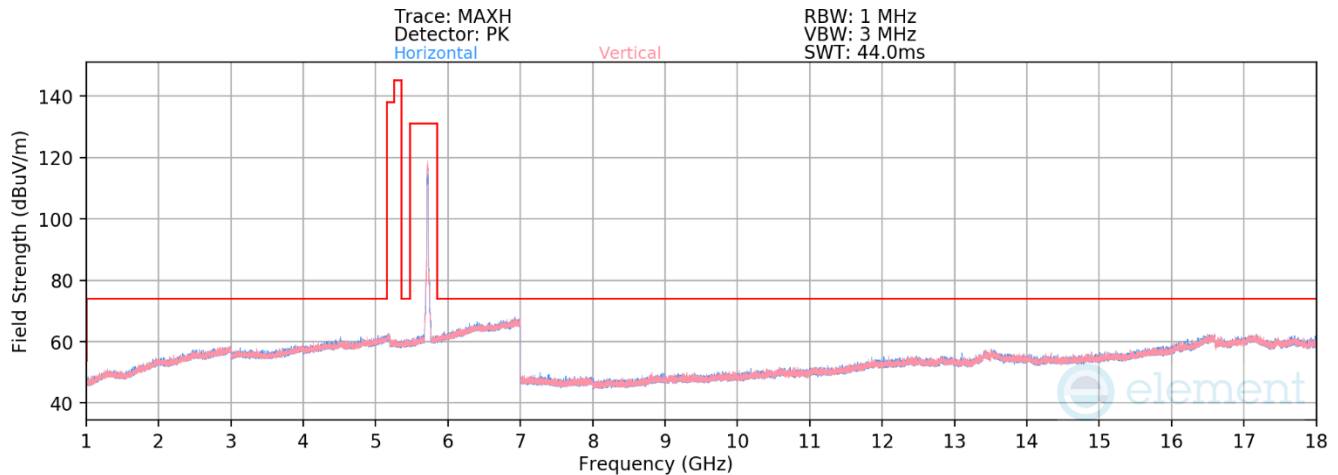

**Plot 7-295. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.144 – RU242)**


Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 5720MHz  
Channel: 144

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 11440.00      | Average  | V               | -                   | -                          | -84.98               | 18.86       | 40.88                   | 53.98          | -13.10      |
| * 11440.00      | Peak     | V               | -                   | -                          | -73.51               | 18.86       | 52.35                   | 73.98          | -21.63      |
| 17160.00        | Peak     | V               | -                   | -                          | -73.03               | 28.01       | 61.98                   | 68.23          | -6.25       |

**Table 7-215. Radiated Measurements CDD Primary (RU242)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 171 of 380                   |

V 10.6 10/27/2023

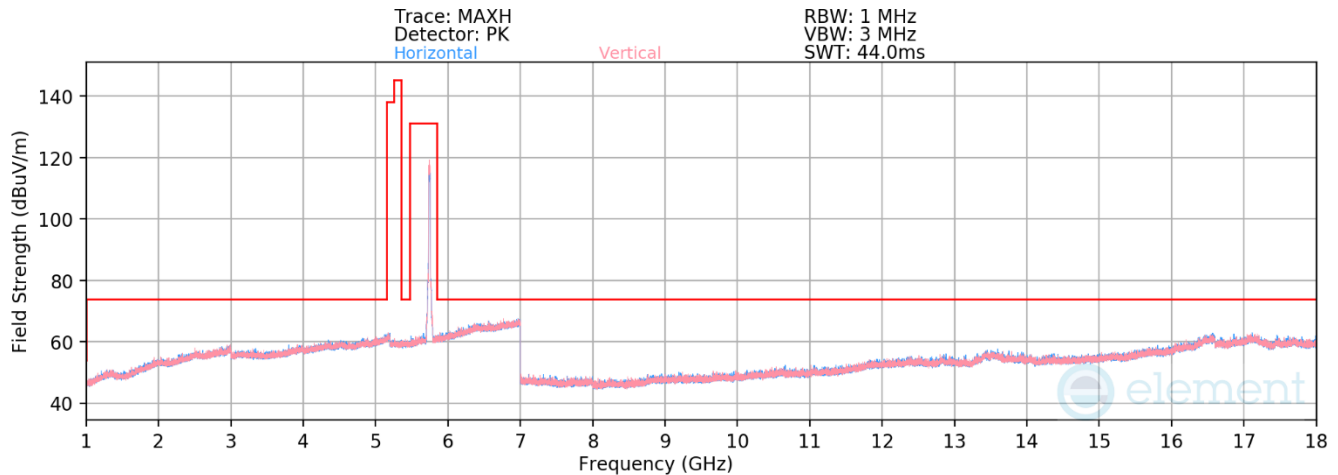

**Plot 7-296. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.149 – RU242)**


Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 5745MHz  
Channel: 149

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 11490.00      | Average  | V               | -                   | -                          | -84.82               | 18.94       | 41.12                   | 53.98          | -12.86      |
| * 11490.00      | Peak     | V               | -                   | -                          | -73.65               | 18.94       | 52.30                   | 73.98          | -21.68      |
| 17235.00        | Peak     | V               | -                   | -                          | -73.56               | 27.89       | 61.34                   | 68.23          | -6.89       |


**Table 7-216. Radiated Measurements CDD Primary (RU242)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 172 of 380                   |

V 10.6 10/27/2023

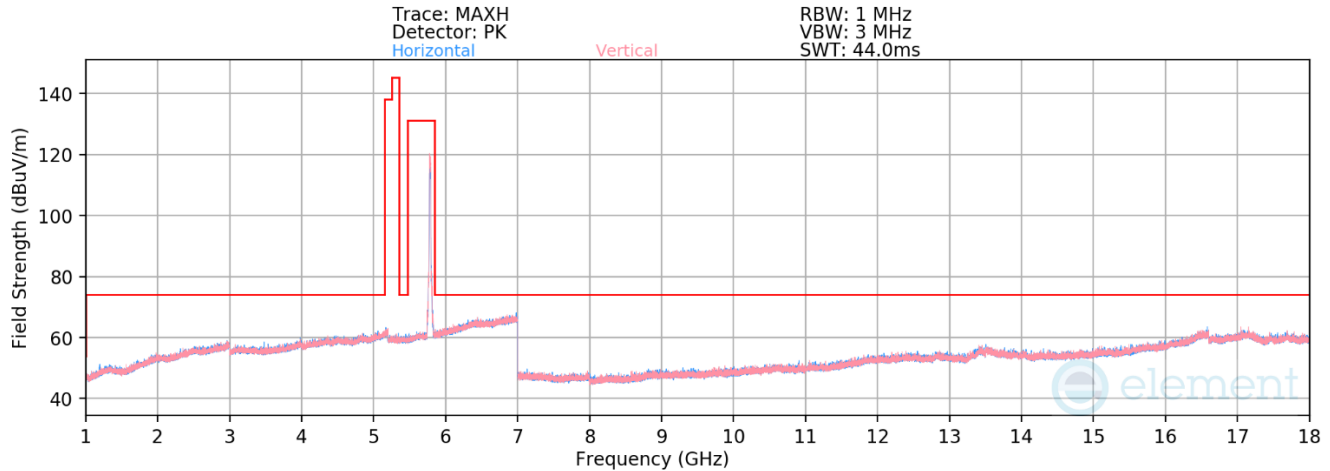

**Plot 7-297. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.157 – RU242)**

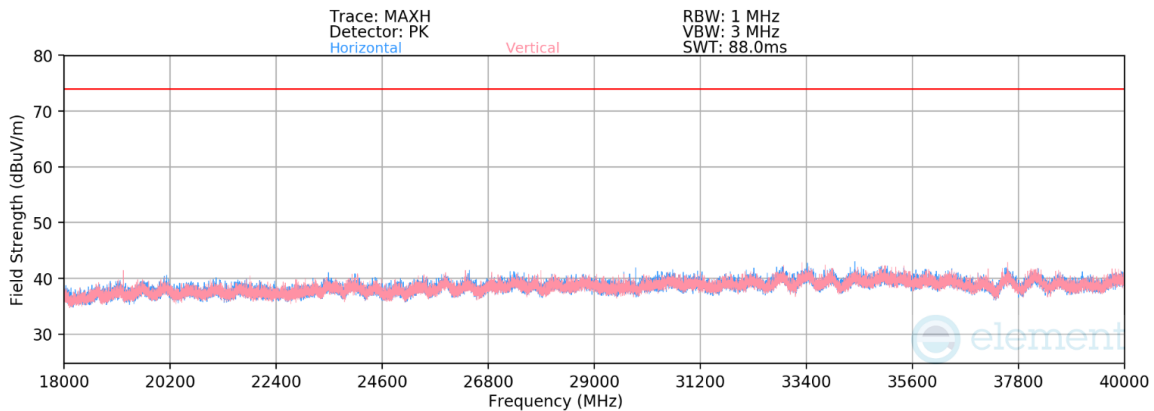

**Plot 7-298. Radiated Spurious Emissions 18 GHz - 40GHz CDD Primary (11be Ch.157 — RU242)**


Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 5785MHz  
Channel: 157

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11570.00      | Average  | V               | -                   | -                          | -84.56               | 19.25       | 0.00                            | 41.69                   | 53.98          | -12.28      |
| * 11570.00      | Peak     | V               | -                   | -                          | -73.30               | 19.25       | 0.00                            | 52.95                   | 73.98          | -21.02      |
| 17355.00        | Peak     | V               | -                   | -                          | -72.90               | 27.54       | 0.00                            | 61.64                   | 68.23          | -6.59       |
| 23140.00        | Peak     | H               | -                   | -                          | -58.56               | -7.12       | -9.54                           | 31.78                   | 68.23          | -36.45      |
| 28925.00        | Peak     | V               | -                   | -                          | -56.50               | -3.99       | -9.54                           | 36.97                   | 68.23          | -31.26      |
| 34710.00        | Peak     | H               | -                   | -                          | -67.09               | -4.70       | -9.54                           | 25.67                   | 68.23          | -42.56      |

**Table 7-217. Radiated Measurements CDD Primary (RU242)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 173 of 380                   |

V 10.6 10/27/2023

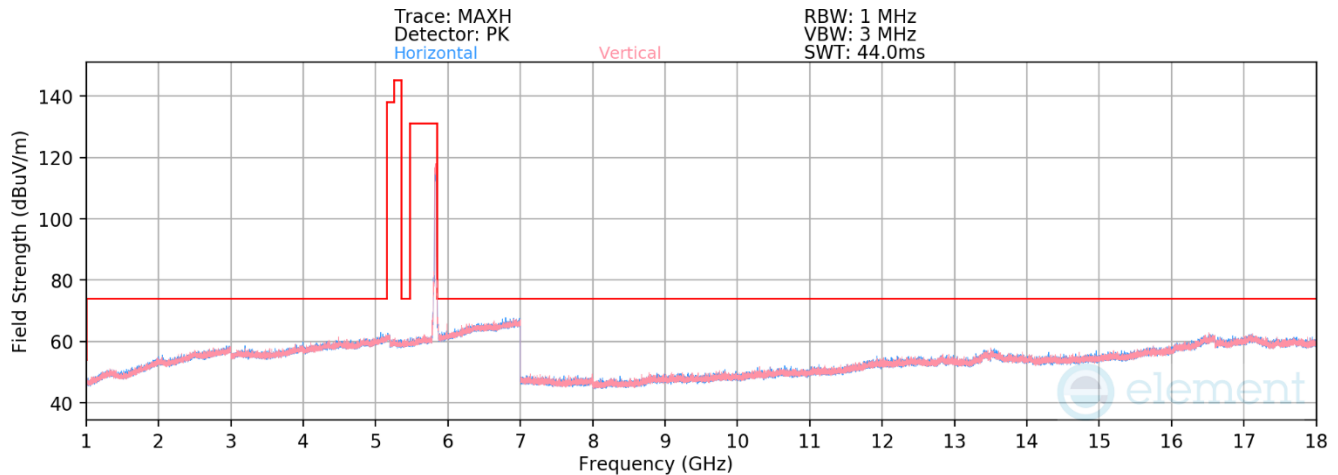

**Plot 7-299. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.165 – RU242)**

Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 5825MHz  
Channel: 165

|   | Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|---|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * | 11650.00        | Average  | H               | -                   | -                          | -84.70               | 19.48       | 41.78                   | 53.98          | -12.20      |
| * | 11650.00        | Peak     | H               | -                   | -                          | -73.01               | 19.48       | 53.47                   | 73.98          | -20.51      |
|   | 17475.00        | Peak     | V               | -                   | -                          | -73.70               | 28.50       | 61.80                   | 68.23          | -6.43       |


**Table 7-218. Radiated Measurements CDD Primary (RU242)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 174 of 380                   |

V 10.6 10/27/2023

## 7.6.2 CDD Diversity Radiated Spurious Emissions

### RU26

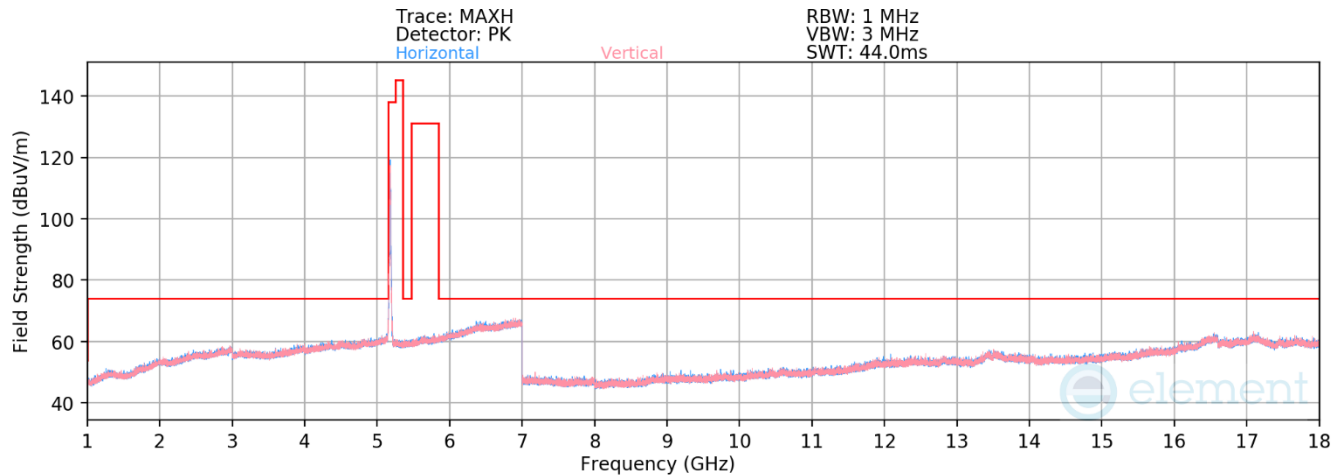

**Plot 7-300. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.36 – RU26)**


|                           |                     |
|---------------------------|---------------------|
| Mode:                     | 802.11be (20MHz BW) |
| Data Rate:                | MCS0                |
| RU Index:                 | 4                   |
| Distance of Measurements: | 3 Meters            |
| Operating Frequency:      | 5180MHz             |
| Channel:                  | 36                  |

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 10360.00        | Peak     | V               | -                   | -                          | -72.88               | 16.98       | 51.10                   | 68.23          | -17.13      |
| * 15540.00      | Average  | H               | -                   | -                          | -85.17               | 24.96       | 46.79                   | 53.98          | -7.19       |
| * 15540.00      | Peak     | H               | -                   | -                          | -74.26               | 24.96       | 57.71                   | 73.98          | -16.27      |


**Table 7-219. Radiated Measurements CDD Diversity (RU26)**

|                                            |                                                                                     |                                               |  |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------|--|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |  | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device                    |  | Page 175 of 380                   |

V 10.6 10/27/2023

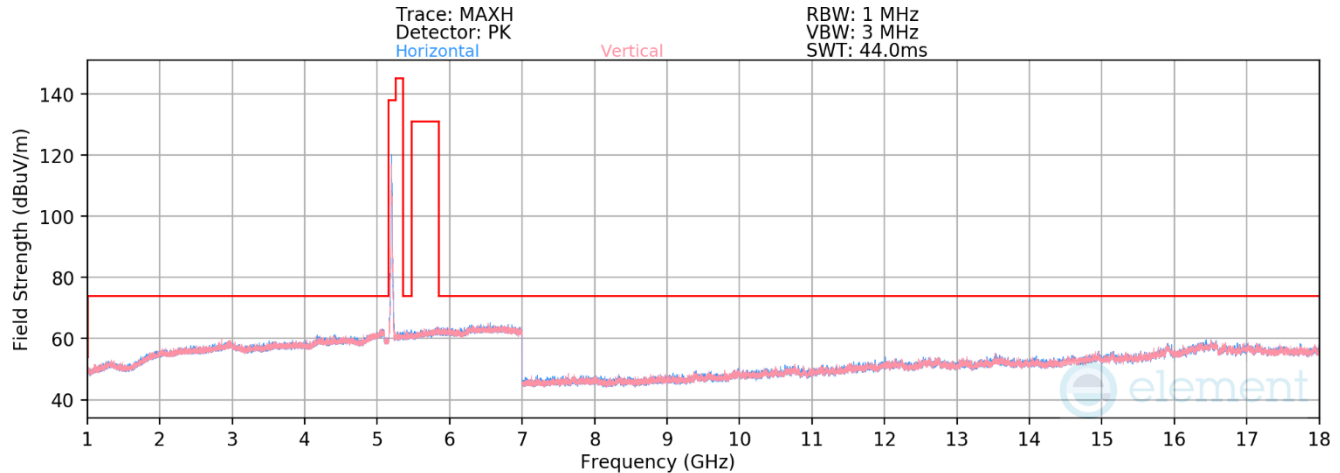

**Plot 7-301. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.40 – RU26)**

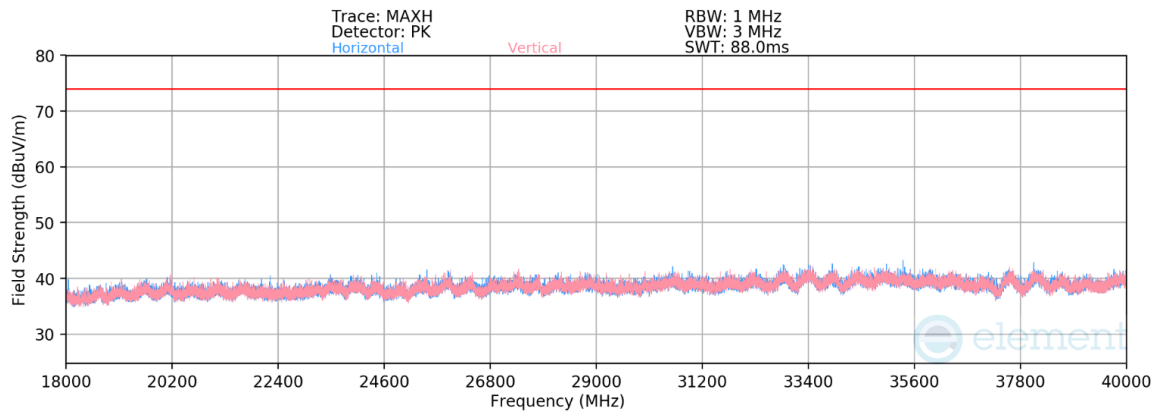

**Plot 7-302. Radiated Spurious Emissions 18 GHz - 40GHz CDD Diversity (11be Ch.40 — RU26)**

Mode: 802.11be (20MHz BW)

Data Rate: MCS0

RU Index: 4

Distance of Measurements: 3 Meters

Operating Frequency: 5200MHz


Channel: 40

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10400.00        | Peak     | H               | -                   | -                          | -71.26               | 14.74       | 0.00                            | 50.48                   | 68.23          | -17.75      |
| * 15600.00      | Average  | H               | -                   | -                          | -86.33               | 22.60       | 0.00                            | 43.27                   | 53.98          | -10.71      |
| * 15600.00      | Peak     | H               | -                   | -                          | -74.50               | 22.60       | 0.00                            | 55.11                   | 73.98          | -18.87      |
| * 20800.00      | Average  | V               | -                   | -                          | -61.52               | -7.67       | -9.54                           | 28.27                   | 53.98          | -25.71      |
| * 20800.00      | Peak     | V               | -                   | -                          | -50.00               | -7.67       | -9.54                           | 39.79                   | 73.98          | -34.19      |
| 26000.00        | Peak     | H               | -                   | -                          | -50.29               | -5.94       | -9.54                           | 41.23                   | 68.23          | -27.00      |
| * 31200.00      | Average  | H               | -                   | -                          | -63.55               | -3.75       | -9.54                           | 30.16                   | 53.98          | -23.82      |
| * 31200.00      | Peak     | H               | -                   | -                          | -52.15               | -3.75       | -9.54                           | 41.56                   | 73.98          | -32.42      |

**Table 7-220. Radiated Measurements CDD Diversity (RU26)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 176 of 380                   |

V 10.6 10/27/2023

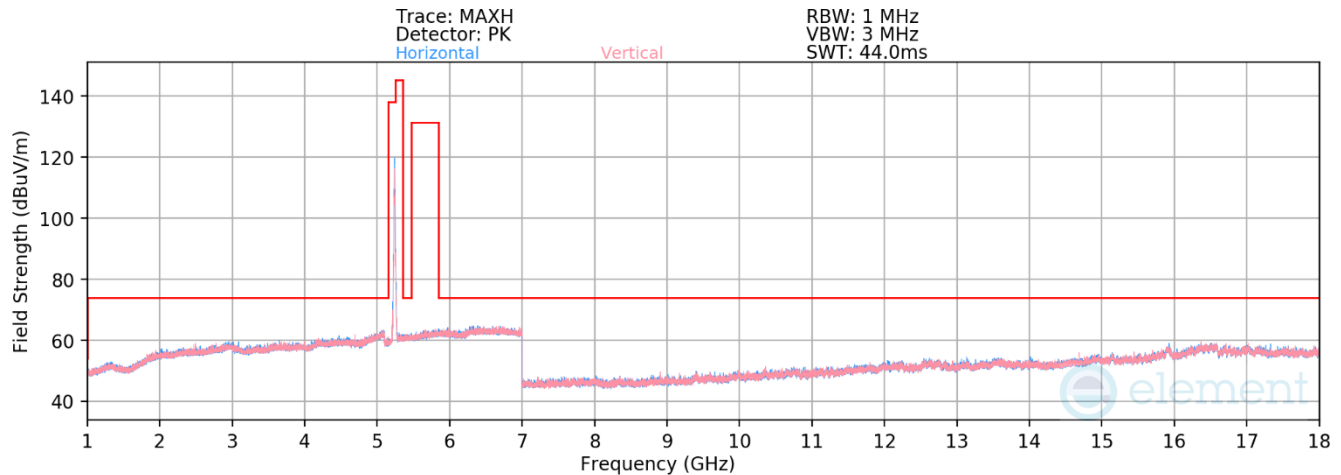


**Plot 7-303. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.48 – RU26)**

Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 4  
Distance of Measurements: 3 Meters  
Operating Frequency: 5240MHz  
Channel: 48

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 10480.00        | Peak     | H               | -                   | -                          | -71.52               | 14.81       | 50.29                   | 68.23          | -17.94      |
| * 15720.00      | Average  | H               | -                   | -                          | -86.73               | 23.18       | 43.46                   | 53.98          | -10.52      |
| * 15720.00      | Peak     | H               | -                   | -                          | -75.37               | 23.18       | 54.81                   | 73.98          | -19.17      |

**Table 7-221. Radiated Measurements CDD Diversity (RU26)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 177 of 380                   |

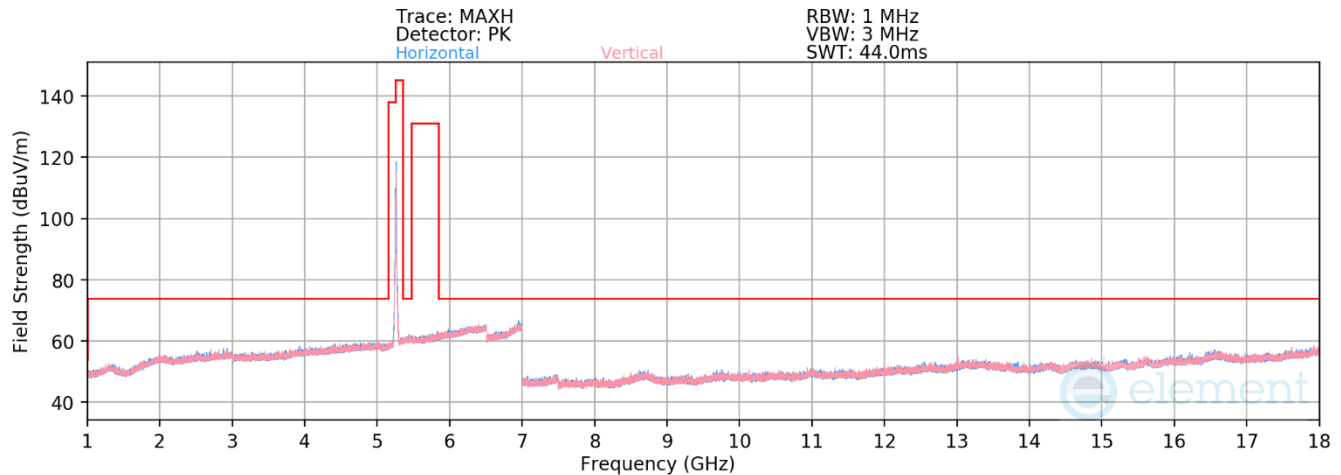

**Plot 7-304. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.52 – RU26)**


Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 4  
Distance of Measurements: 3 Meters  
Operating Frequency: 5260MHz  
Channel: 52

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 10520.00        | Peak     | V               | -                   | -                          | -69.94               | 12.70       | 49.76                   | 68.23          | -18.47      |
| * 15780.00      | Average  | H               | -                   | -                          | -81.63               | 17.69       | 43.06                   | 53.98          | -10.92      |
| * 15780.00      | Peak     | H               | -                   | -                          | -71.20               | 17.69       | 53.49                   | 73.98          | -20.49      |


**Table 7-222. Radiated Measurements CDD Diversity (RU26)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 178 of 380                   |

V 10.6 10/27/2023

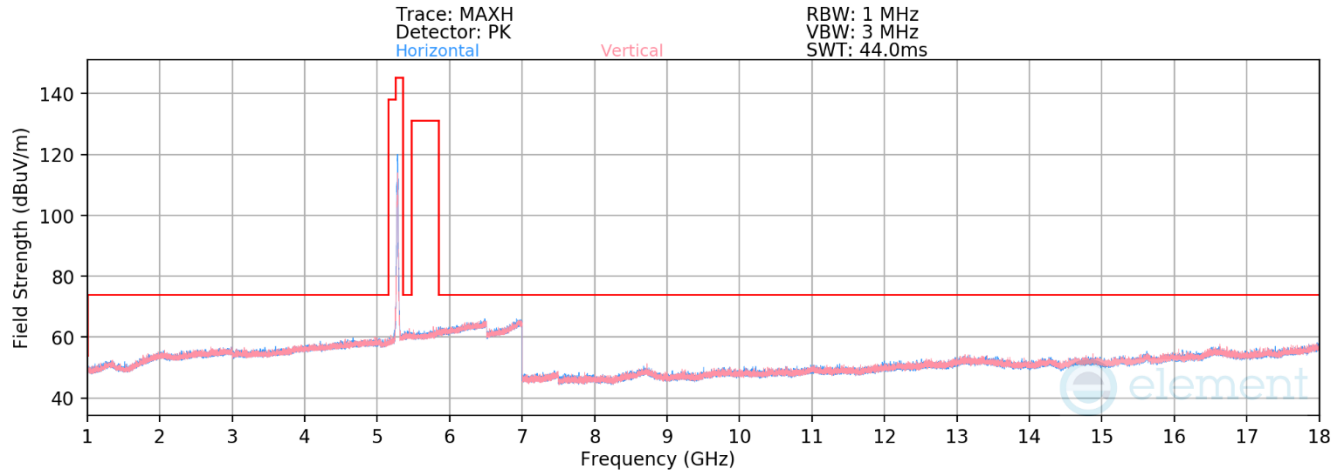

**Plot 7-305. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.56 – RU26)**

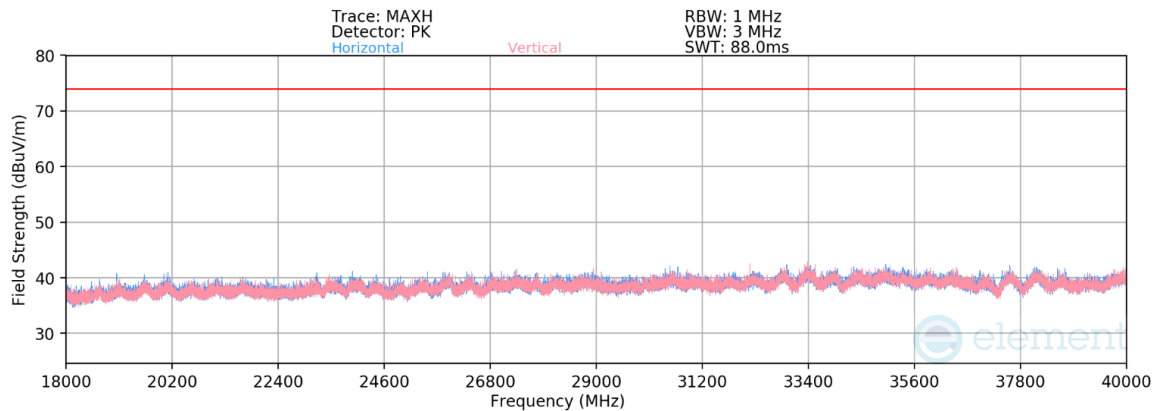


**Plot 7-306. Radiated Spurious Emissions 18 GHz - 40GHz CDD Diversity (11be Ch.56 — RU26)**

Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 4  
Distance of Measurements: 3 Meters  
Operating Frequency: 5280MHz  
Channel: 56

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10560.00        | Peak     | V               | -                   | -                          | -69.12               | 12.59       | 0.00                            | 50.47                   | 68.23          | -17.76      |
| * 15840.00      | Average  | V               | -                   | -                          | -81.48               | 17.59       | 0.00                            | 43.11                   | 53.98          | -10.87      |
| * 15840.00      | Peak     | V               | -                   | -                          | -70.78               | 17.59       | 0.00                            | 53.81                   | 73.98          | -20.17      |
| * 21120.00      | Average  | H               | -                   | -                          | -60.70               | -7.55       | -9.54                           | 29.21                   | 53.98          | -24.77      |
| * 21120.00      | Peak     | H               | -                   | -                          | -49.49               | -7.55       | -9.54                           | 40.42                   | 73.98          | -33.56      |
| 26400.00        | Peak     | V               | -                   | -                          | -50.62               | -5.30       | -9.54                           | 41.54                   | 68.23          | -26.69      |
| * 31680.00      | Average  | H               | -                   | -                          | -63.46               | -4.05       | -9.54                           | 29.95                   | 53.98          | -24.03      |
| * 31680.00      | Peak     | H               | -                   | -                          | -51.88               | -4.05       | -9.54                           | 41.53                   | 73.98          | -32.45      |

**Table 7-223. Radiated Measurements CDD Diversity (RU26)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 179 of 380                   |

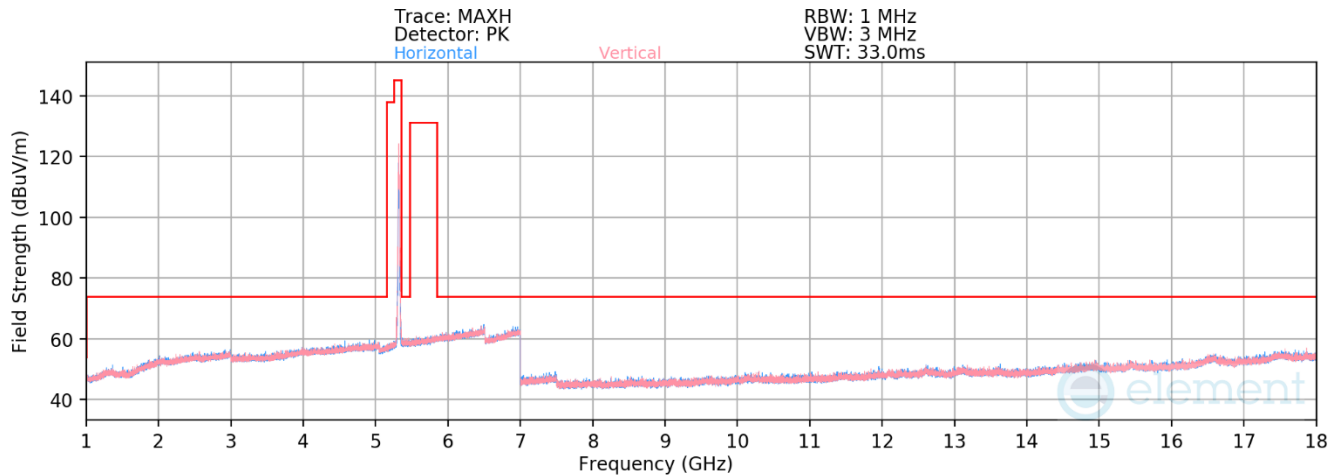

**Plot 7-307. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.64 – RU26)**

Mode: 802.11be (20MHz BW)

Data Rate: MCS0

RU Index: 4

Distance of Measurements: 3 Meters

Operating Frequency: 5320MHz


Channel: 64

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 10640.00      | Average  | V               | -                   | -                          | -79.24               | 9.60        | 37.36                   | 53.98          | -16.62      |
| * 10640.00      | Peak     | V               | -                   | -                          | -68.22               | 9.60        | 48.38                   | 73.98          | -25.60      |
| * 15960.00      | Average  | V               | -                   | -                          | -79.51               | 13.61       | 41.10                   | 53.98          | -12.88      |
| * 15960.00      | Peak     | V               | -                   | -                          | -68.39               | 13.61       | 52.22                   | 73.98          | -21.76      |

**Table 7-224. Radiated Measurements CDD Diversity (RU26)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 180 of 380                   |

V 10.6 10/27/2023

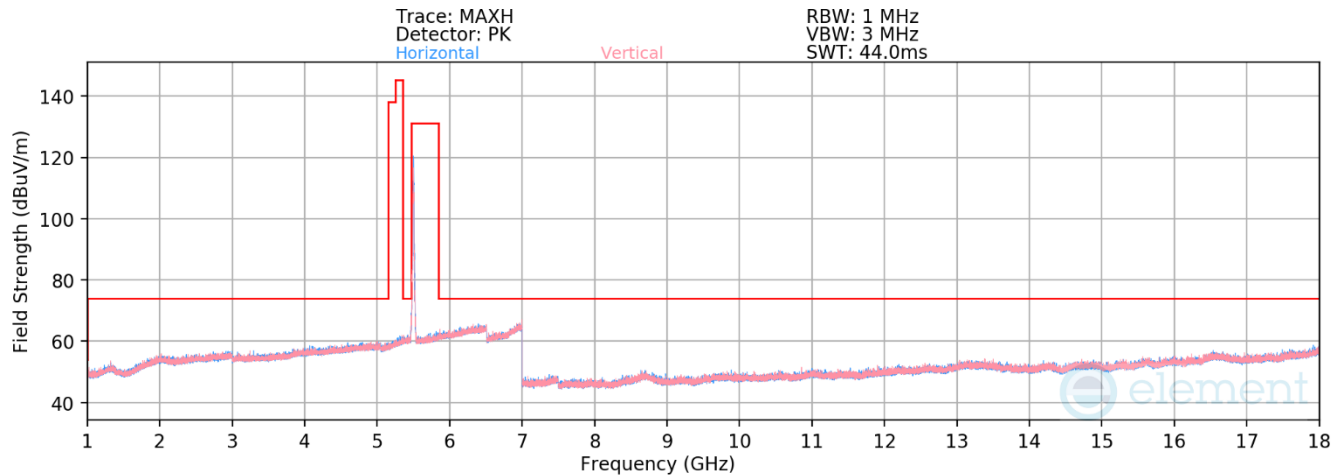

**Plot 7-308. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.100 – RU26)**


Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 4  
Distance of Measurements: 3 Meters  
Operating Frequency: 5500MHz  
Channel: 100

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 11000.00      | Average  | V               | -                   | -                          | -80.54               | 12.88       | 39.35                   | 53.98          | -14.63      |
| * 11000.00      | Peak     | V               | -                   | -                          | -70.00               | 12.88       | 49.88                   | 73.98          | -24.10      |
| 16500.00        | Peak     | H               | -                   | -                          | -71.19               | 18.88       | 54.69                   | 68.23          | -13.54      |


**Table 7-225. Radiated Measurements CDD Diversity (RU26)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 181 of 380                   |

V 10.6 10/27/2023

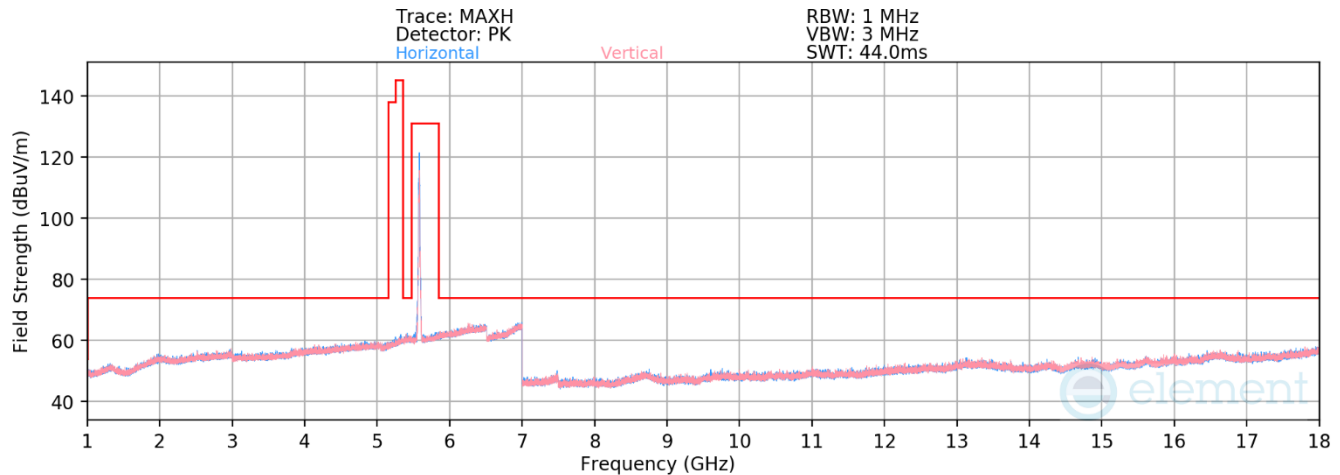

**Plot 7-309. Radiated Spurious Emissions above 1GHz CDD Diversity (11be - Ch.116 - RU26)**

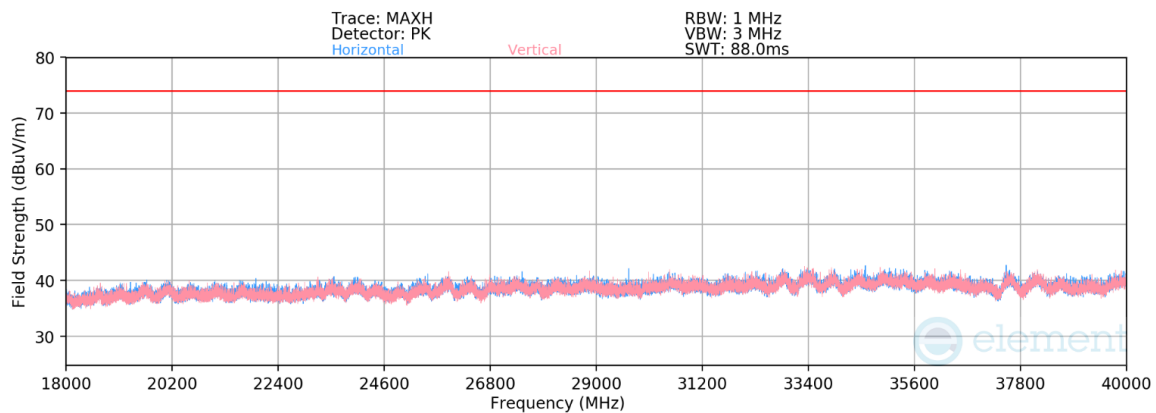

**Plot 7-310. Radiated Spurious Emissions 18 GHz - 40GHz CDD Diversity (11be Ch.116 - RU26)**

Mode: 802.11be (20MHz BW)

Data Rate: MCS0

RU Index: 4

Distance of Measurements: 3 Meters


Operating Frequency: 5580MHz

Channel: 116

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11160.00      | Average  | V               | -                   | -                          | -80.50               | 12.56       | 0.00                            | 39.06                   | 53.98          | -14.92      |
| * 11160.00      | Peak     | V               | -                   | -                          | -69.64               | 12.56       | 0.00                            | 49.92                   | 73.98          | -24.06      |
| 16740.00        | Peak     | H               | -                   | -                          | -71.45               | 19.35       | 0.00                            | 54.90                   | 68.23          | -13.33      |
| * 22320.00      | Average  | V               | -                   | -                          | -61.56               | -7.57       | -9.54                           | 28.33                   | 53.98          | -25.65      |
| * 22320.00      | Peak     | V               | -                   | -                          | -50.46               | -7.57       | -9.54                           | 39.43                   | 73.98          | -34.55      |
| 27900.00        | Peak     | V               | -                   | -                          | -52.26               | -4.75       | -9.54                           | 40.44                   | 68.23          | -27.79      |
| 33480.00        | Peak     | H               | -                   | -                          | -49.47               | -4.38       | -9.54                           | 43.61                   | 68.23          | -24.62      |

**Table 7-226. Radiated Measurements CDD Diversity (RU26)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 182 of 380                   |

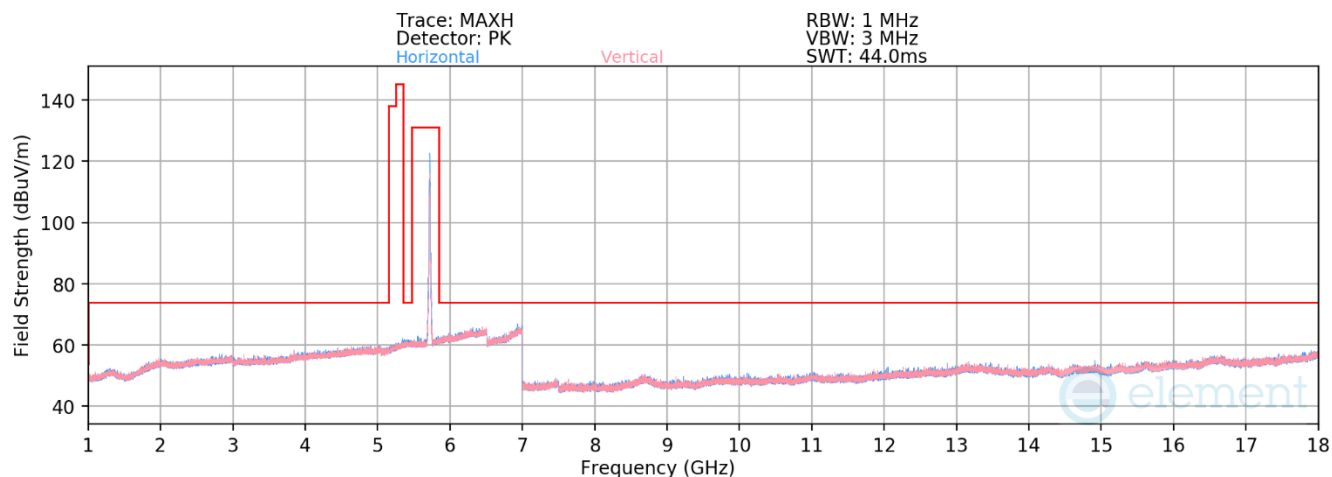

**Plot 7-311. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.144 – RU26)**

Mode: 802.11be (20MHz BW)

Data Rate: MCS0

RU Index: 4

Distance of Measurements: 3 Meters

Operating Frequency: 5720MHz


Channel: 144

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 11440.00      | Average  | V               | -                   | -                          | -80.58               | 13.40       | 39.82                   | 53.98          | -14.16      |
| * 11440.00      | Peak     | V               | -                   | -                          | -69.85               | 13.40       | 50.55                   | 73.98          | -23.43      |
| 17160.00        | Peak     | H               | -                   | -                          | -71.40               | 19.14       | 54.75                   | 68.23          | -13.48      |

**Table 7-227. Radiated Measurements CDD Diversity (RU26)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 183 of 380                   |

V 10.6 10/27/2023

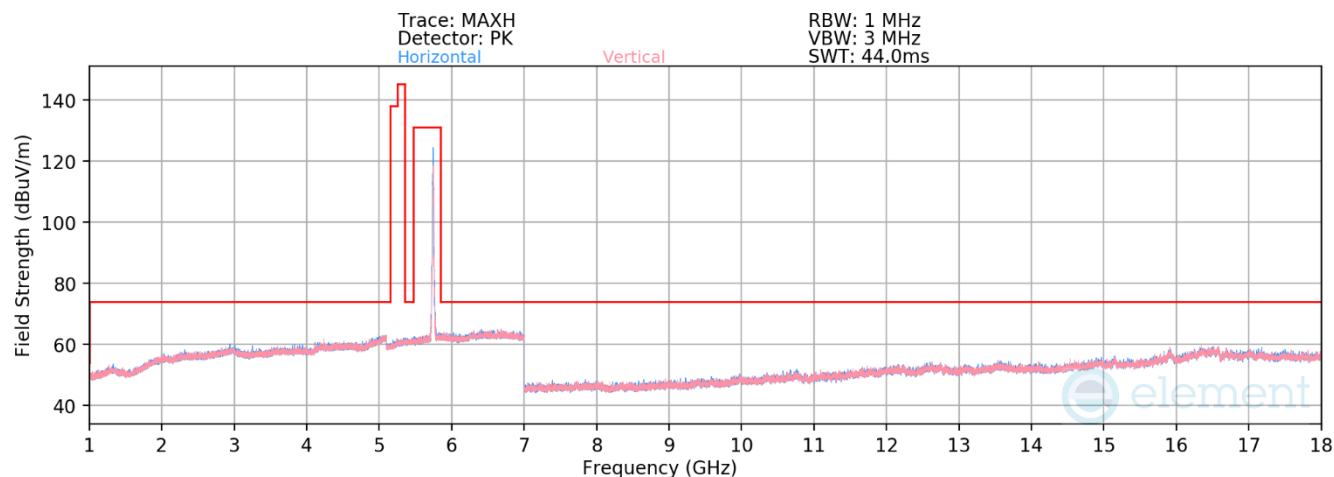

**Plot 7-312. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.149 – RU26)**


Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 4  
Distance of Measurements: 3 Meters  
Operating Frequency: 5745MHz  
Channel: 149

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 11490.00      | Average  | H               | -                   | -                          | -83.44               | 17.23       | 40.80                   | 53.98          | -13.18      |
| * 11490.00      | Peak     | H               | -                   | -                          | -72.78               | 17.23       | 51.45                   | 73.98          | -22.53      |
| 17235.00        | Peak     | V               | -                   | -                          | -74.59               | 25.10       | 57.52                   | 68.23          | -10.71      |


**Table 7-228. Radiated Measurements CDD Diversity (RU26)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 184 of 380                   |

V 10.6 10/27/2023

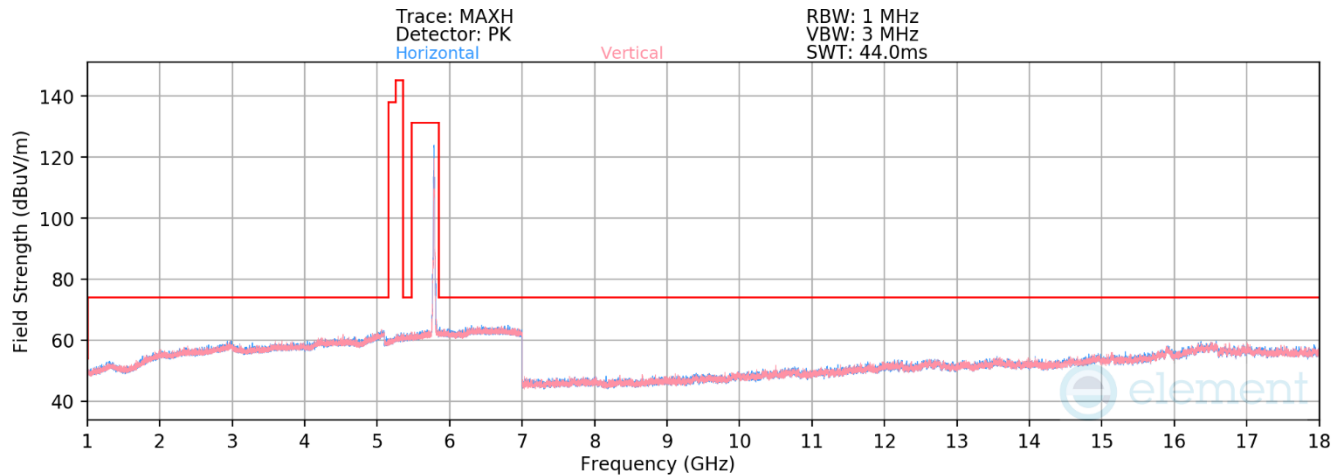

**Plot 7-313. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.157 – RU26)**

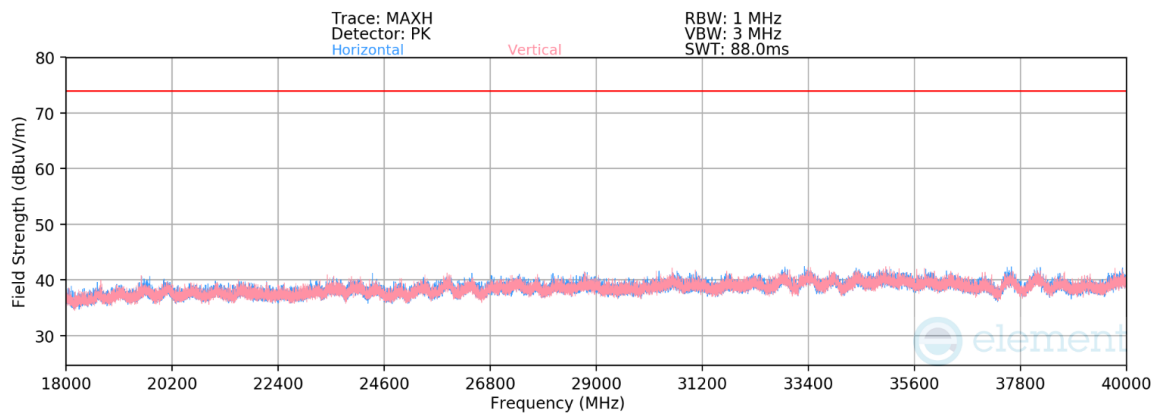

**Plot 7-314. Radiated Spurious Emissions 18 GHz - 40GHz CDD Diversity (11be Ch.157 — RU26)**

Mode: 802.11be (20MHz BW)

Data Rate: MCS0

RU Index: 4

Distance of Measurements: 3 Meters

Operating Frequency: 5785MHz


Channel: 157

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11570.00      | Average  | V               | -                   | -                          | -83.78               | 17.05       | 0.00                            | 40.27                   | 53.98          | -13.71      |
| * 11570.00      | Peak     | V               | -                   | -                          | -72.80               | 17.05       | 0.00                            | 51.24                   | 73.98          | -22.74      |
| 17355.00        | Peak     | H               | -                   | -                          | -74.26               | 24.14       | 0.00                            | 56.88                   | 68.23          | -11.35      |
| 23140.00        | Peak     | V               | -                   | -                          | -50.35               | -7.13       | -9.54                           | 39.97                   | 68.23          | -28.26      |
| 28925.00        | Peak     | H               | -                   | -                          | -52.10               | -3.95       | -9.54                           | 41.41                   | 68.23          | -26.82      |
| 34710.00        | Peak     | H               | -                   | -                          | -51.03               | -4.65       | -9.54                           | 41.79                   | 68.23          | -26.44      |

**Table 7-229. Radiated Measurements CDD Diversity (RU26)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 185 of 380                   |

V 10.6 10/27/2023

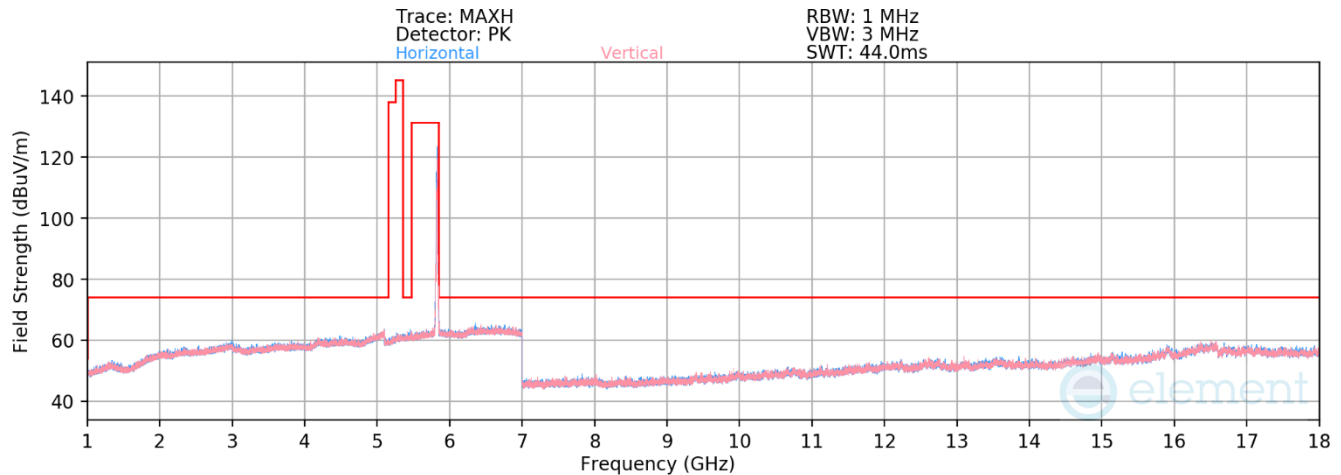

**Plot 7-315. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.165 – RU26)**

Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 4  
Distance of Measurements: 3 Meters  
Operating Frequency: 5825MHz  
Channel: 165


| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 11650.00      | Average  | V               | -                   | -                          | -83.29               | 16.99       | 40.70                   | 53.98          | -13.28      |
| * 11650.00      | Peak     | V               | -                   | -                          | -72.07               | 16.99       | 51.92                   | 73.98          | -22.06      |
| 17475.00        | Peak     | V               | -                   | -                          | -74.10               | 24.55       | 57.45                   | 68.23          | -10.78      |

**Table 7-230. Radiated Measurements CDD Diversity (RU26)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 186 of 380                   |

V 10.6 10/27/2023

## RU242

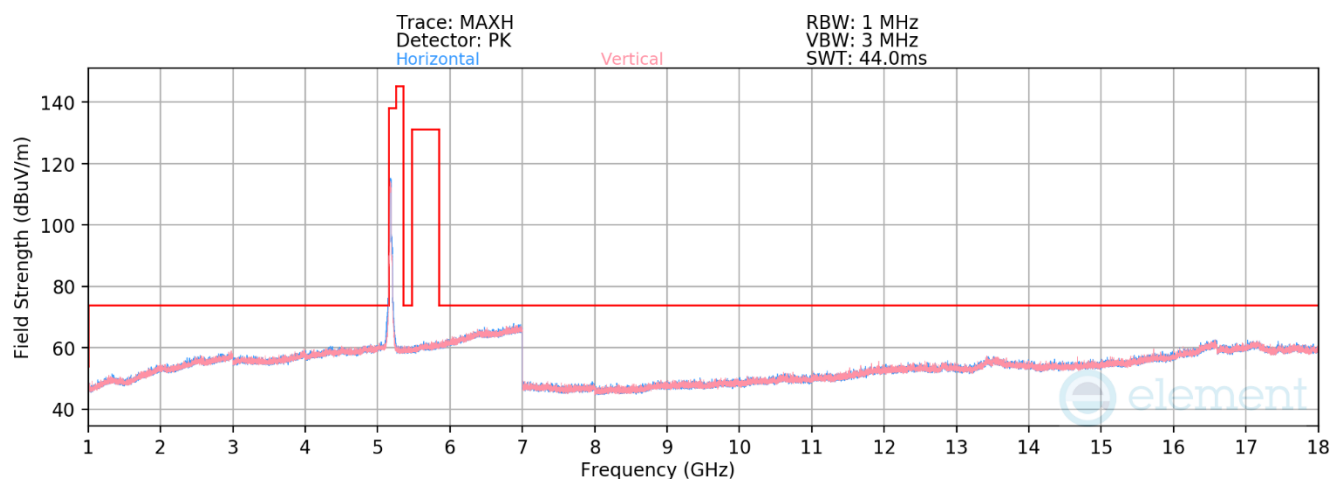

**Plot 7-316. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.36 – RU242)**


Mode: 11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 5180MHz  
Channel: 36

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 10360.00        | Peak     | V               | -                   | -                          | -72.63               | 16.98       | 51.35                   | 68.23          | -16.88      |
| * 15540.00      | Average  | H               | -                   | -                          | -85.43               | 24.96       | 46.54                   | 53.98          | -7.44       |
| * 15540.00      | Peak     | H               | -                   | -                          | -73.91               | 24.96       | 58.05                   | 73.98          | -15.93      |


**Table 7-231. Radiated Measurements CDD Diversity (RU242)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 187 of 380                   |

V 10.6 10/27/2023

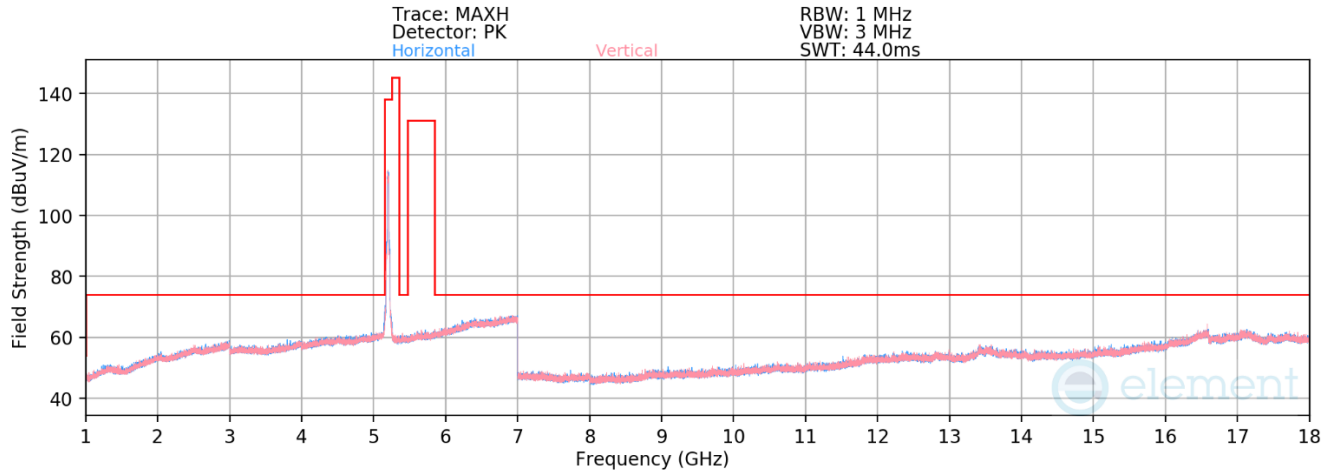

**Plot 7-317. Radiated Spurious Emissions above 1GHz CDD Diversity (11be - Ch.40 - RU242)**

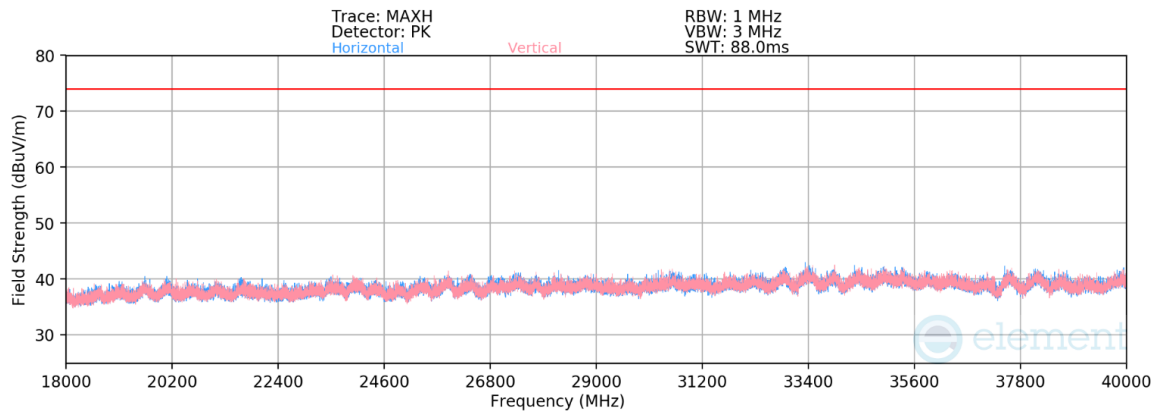


**Plot 7-318. Radiated Spurious Emissions 18 GHz - 40GHz CDD Diversity (11be Ch.40 - RU242)**

Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 5200MHz  
Channel: 40

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10400.00        | Peak     | V               | -                   | -                          | -72.86               | 16.99       | 0.00                            | 51.13                   | 68.23          | -17.10      |
| * 15600.00      | Average  | H               | -                   | -                          | -85.38               | 24.91       | 0.00                            | 46.53                   | 53.98          | -7.45       |
| * 15600.00      | Peak     | H               | -                   | -                          | -73.93               | 24.91       | 0.00                            | 57.98                   | 73.98          | -16.00      |
| * 20800.00      | Average  | V               | -                   | -                          | -68.93               | -7.57       | -9.54                           | 20.96                   | 53.98          | -33.02      |
| * 20800.00      | Peak     | V               | -                   | -                          | -57.97               | -7.57       | -9.54                           | 31.92                   | 73.98          | -42.06      |
| 26000.00        | Peak     | H               | -                   | -                          | -56.07               | -5.88       | -9.54                           | 35.51                   | 68.23          | -32.72      |
| * 31200.00      | Average  | V               | -                   | -                          | -66.98               | -3.74       | -9.54                           | 26.74                   | 53.98          | -27.24      |
| * 31200.00      | Peak     | V               | -                   | -                          | -55.16               | -3.74       | -9.54                           | 38.56                   | 73.98          | -35.42      |

**Table 7-232. Radiated Measurements CDD Diversity (RU242)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 188 of 380                   |

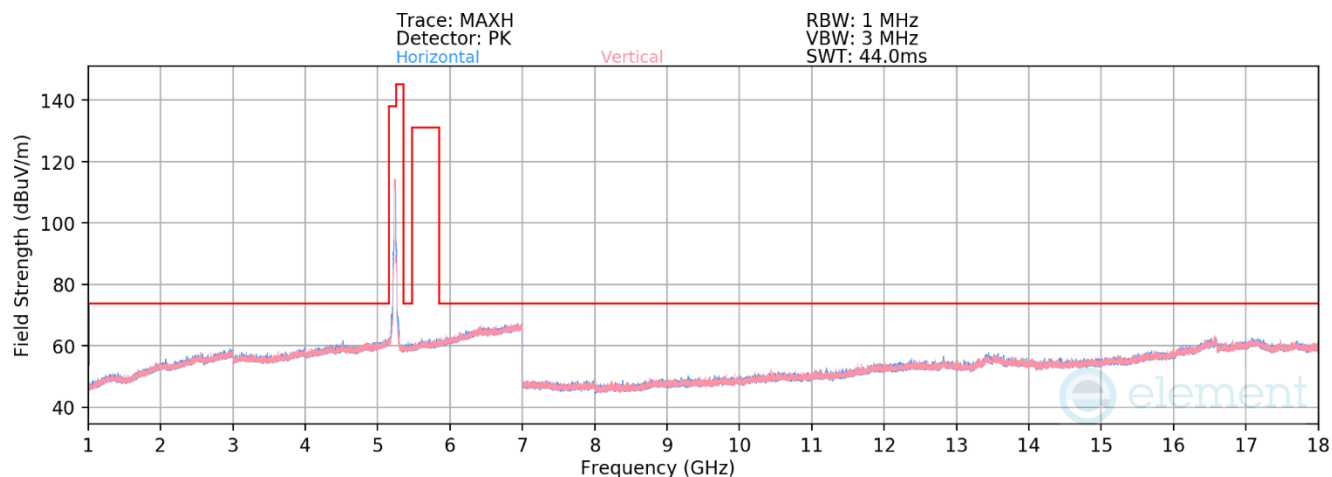

**Plot 7-319. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.48 – RU242)**


Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 5240MHz  
Channel: 48

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 10480.00        | Peak     | V               | -                   | -                          | -73.18               | 17.77       | 51.59                   | 68.23          | -16.64      |
| * 15720.00      | Average  | V               | -                   | -                          | -85.47               | 25.25       | 46.78                   | 53.98          | -7.20       |
| * 15720.00      | Peak     | V               | -                   | -                          | -74.11               | 25.25       | 58.14                   | 73.98          | -15.84      |

**Table 7-233. Radiated Measurements CDD Diversity (RU242)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 189 of 380                   |

V 10.6 10/27/2023

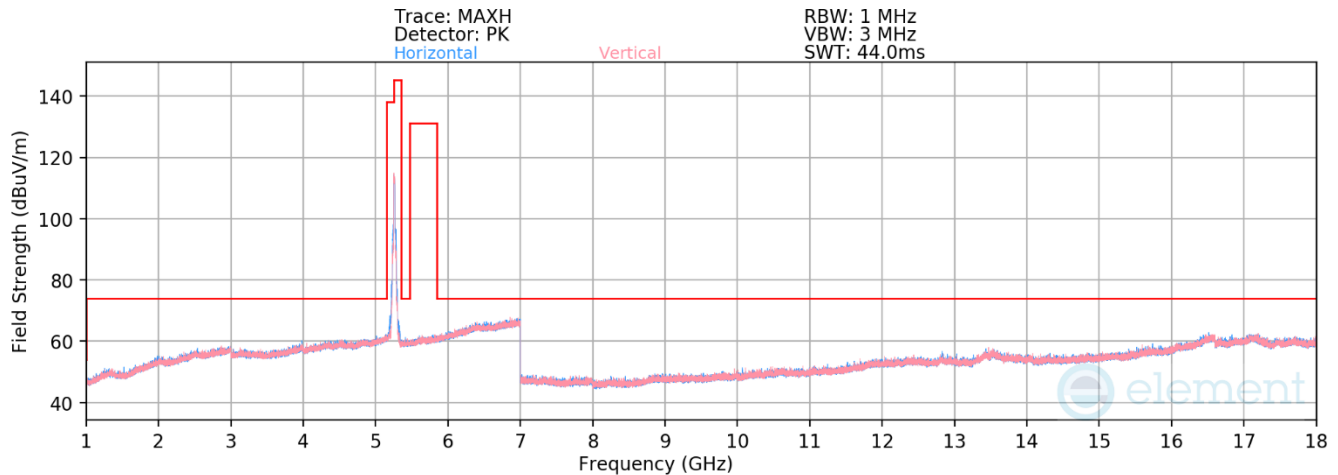

**Plot 7-320. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.52 – RU242)**


Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 5260MHz  
Channel: 52

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 10520.00        | Peak     | H               | -                   | -                          | -73.37               | 17.44       | 51.07                   | 68.23          | -17.17      |
| * 15780.00      | Average  | V               | -                   | -                          | -85.73               | 25.64       | 46.90                   | 53.98          | -7.07       |
| * 15780.00      | Peak     | V               | -                   | -                          | -74.49               | 25.64       | 58.15                   | 73.98          | -15.83      |


**Table 7-234. Radiated Measurements CDD Diversity (RU242)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 190 of 380                   |

V 10.6 10/27/2023

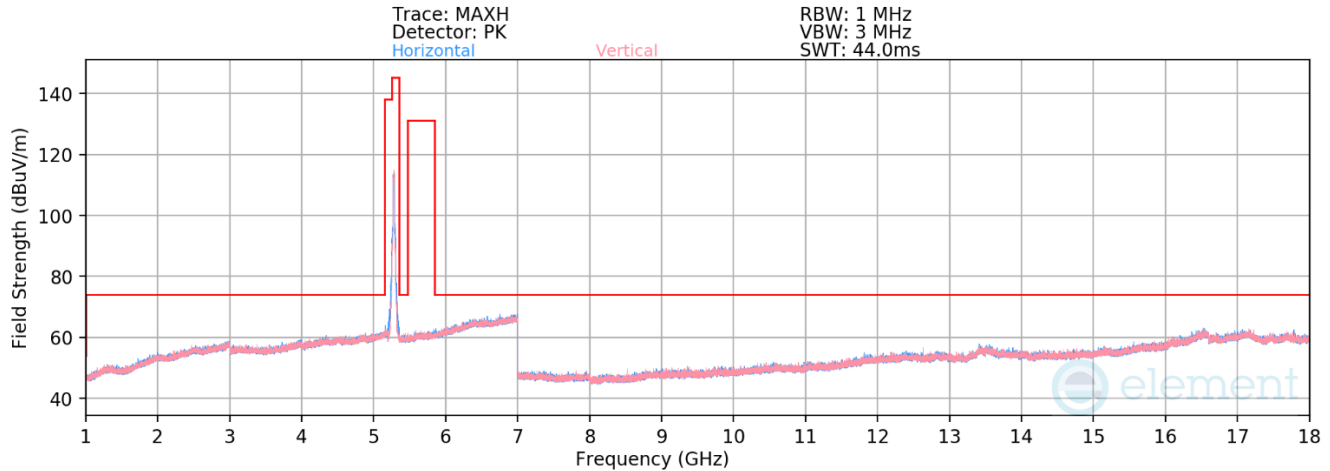

**Plot 7-321. Radiated Spurious Emissions above 1GHz CDD Diversity (11be - Ch.56 - RU242)**

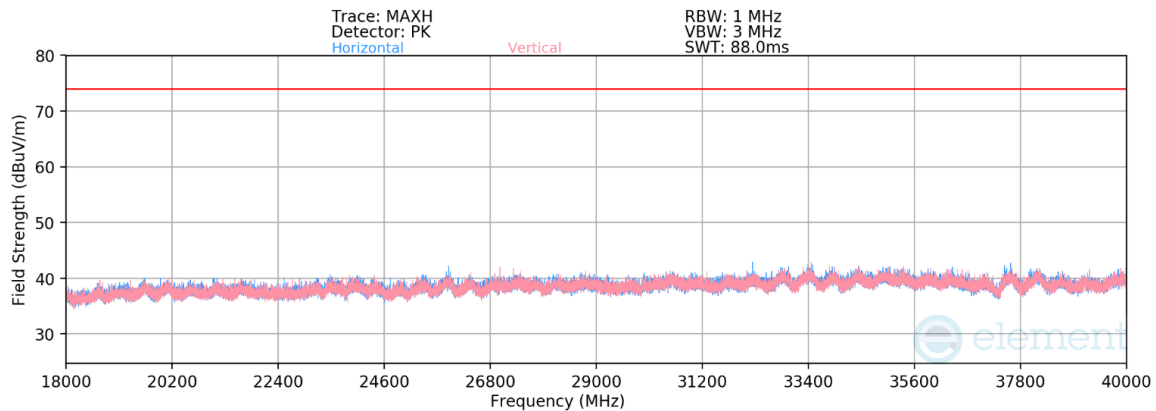

**Plot 7-322. Radiated Spurious Emissions 18 GHz - 40GHz CDD Diversity (11be Ch.56 - RU242)**


Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 5280MHz  
Channel: 56

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10560.00        | Peak     | V               | -                   | -                          | -72.86               | 17.68       | 0.00                            | 51.82                   | 68.23          | -16.41      |
| * 15840.00      | Average  | H               | -                   | -                          | -86.04               | 25.81       | 0.00                            | 46.77                   | 53.98          | -7.21       |
| * 15840.00      | Peak     | H               | -                   | -                          | -74.13               | 25.81       | 0.00                            | 58.68                   | 73.98          | -15.30      |
| * 21120.00      | Average  | V               | -                   | -                          | -68.36               | -7.55       | -9.54                           | 21.55                   | 53.98          | -32.43      |
| * 21120.00      | Peak     | V               | -                   | -                          | -56.79               | -7.55       | -9.54                           | 33.12                   | 73.98          | -40.86      |
| 26400.00        | Peak     | V               | -                   | -                          | -56.30               | -5.42       | -9.54                           | 35.74                   | 68.23          | -32.49      |
| * 31680.00      | Average  | H               | -                   | -                          | -67.45               | -4.05       | -9.54                           | 25.96                   | 53.98          | -28.02      |
| * 31680.00      | Peak     | H               | -                   | -                          | -55.34               | -4.09       | -9.54                           | 38.03                   | 73.98          | -35.95      |

**Table 7-235. Radiated Measurements CDD Diversity (RU242)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 191 of 380                   |

V 10.6 10/27/2023

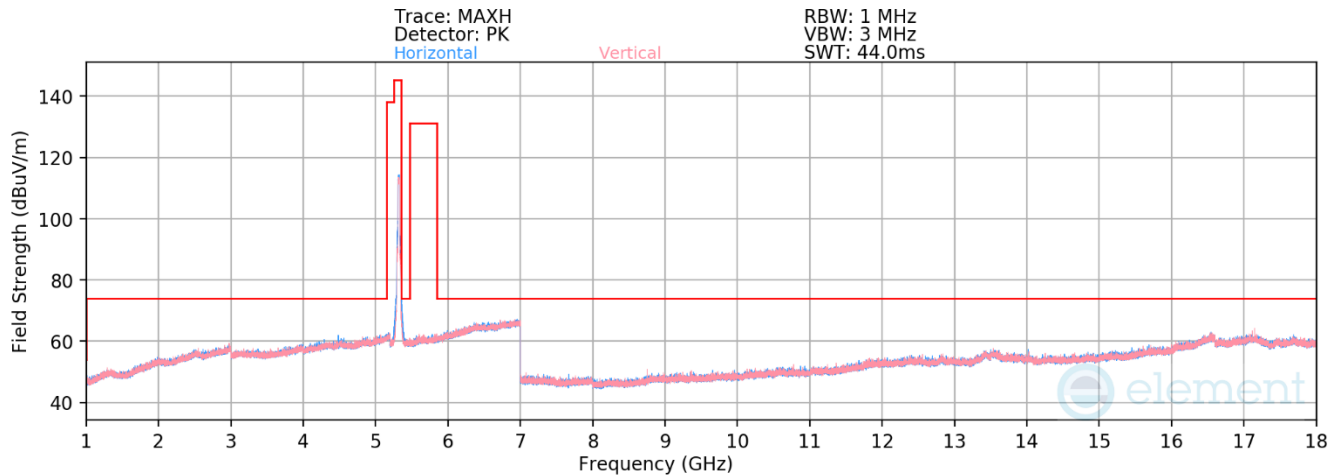

**Plot 7-323. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.64 – RU242)**


Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 5320MHz  
Channel: 64

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 10640.00      | Average  | H               | -                   | -                          | -84.90               | 18.23       | 40.33                   | 53.98          | -13.65      |
| * 10640.00      | Peak     | H               | -                   | -                          | -72.90               | 18.23       | 52.33                   | 73.98          | -21.65      |
| * 15960.00      | Average  | V               | -                   | -                          | -85.98               | 25.95       | 46.97                   | 53.98          | -7.01       |
| * 15960.00      | Peak     | V               | -                   | -                          | -74.34               | 25.95       | 58.61                   | 73.98          | -15.37      |

**Table 7-236. Radiated Measurements CDD Diversity (RU242)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 192 of 380                   |

V 10.6 10/27/2023

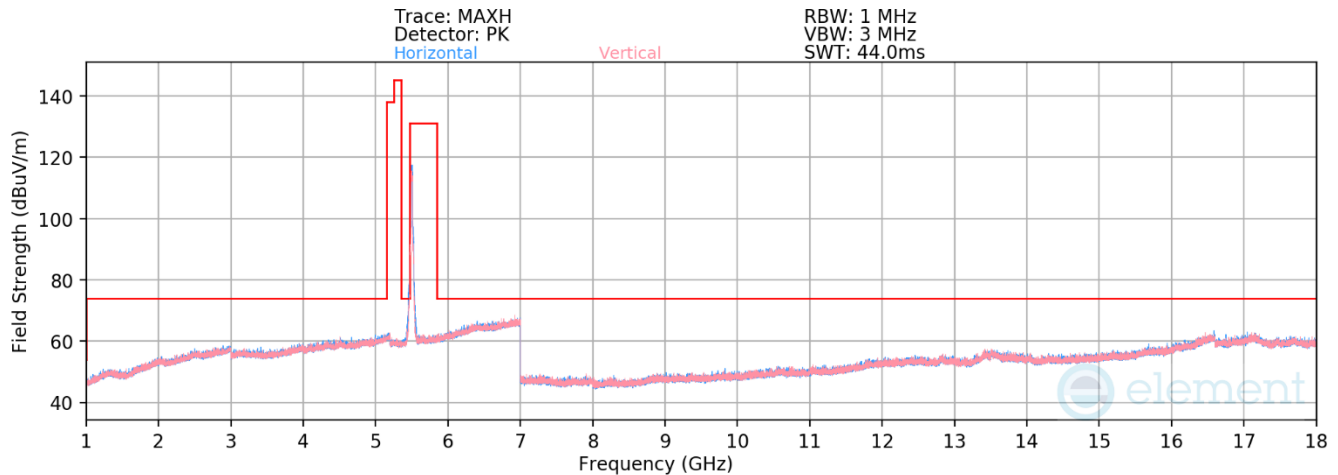

**Plot 7-324. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.100 – RU242)**


Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 5500MHz  
Channel: 100

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 11000.00      | Average  | V               | -                   | -                          | -84.44               | 18.23       | 40.79                   | 53.98          | -13.19      |
| * 11000.00      | Peak     | V               | -                   | -                          | -73.35               | 18.23       | 51.88                   | 73.98          | -22.10      |
| 16500.00        | Peak     | V               | -                   | -                          | -73.68               | 27.52       | 60.84                   | 68.23          | -7.39       |


**Table 7-237. Radiated Measurements CDD Diversity (RU242)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 193 of 380                   |

V 10.6 10/27/2023

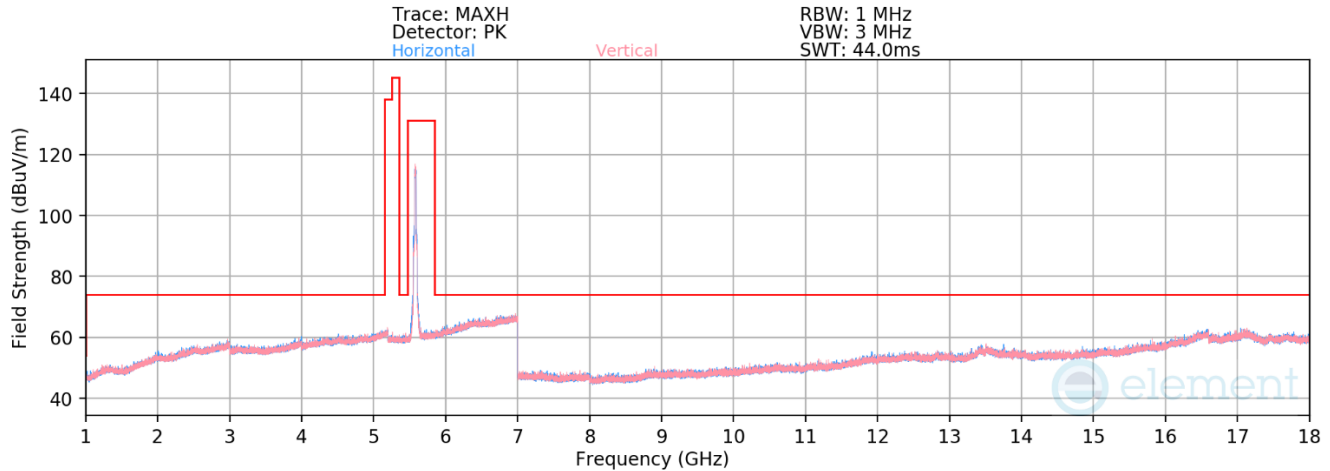

**Plot 7-325. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.116 – RU242)**

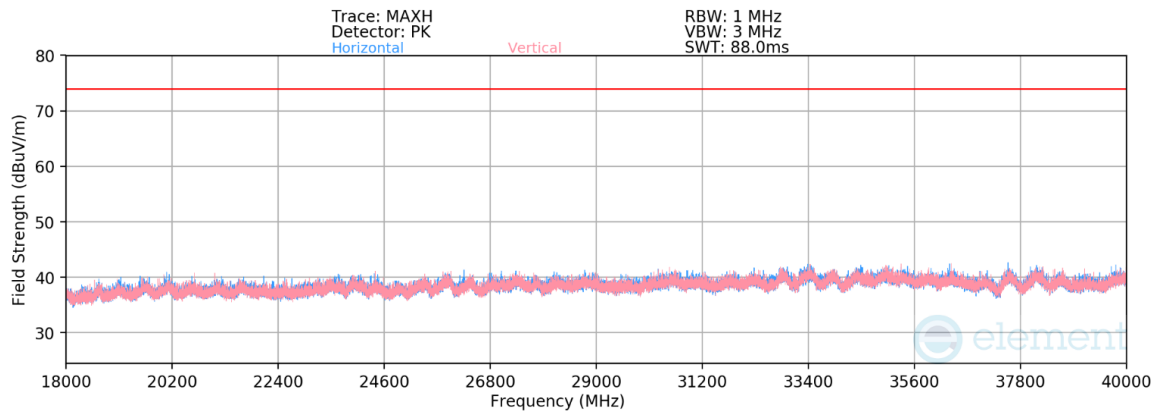

**Plot 7-326. Radiated Spurious Emissions 18 GHz - 40GHz CDD Diversity (11be Ch.116 — RU242)**


Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 5580MHz  
Channel: 116

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11160.00      | Average  | H               | -                   | -                          | -84.17               | 18.49       | 0.00                            | 41.32                   | 53.98          | -12.66      |
| * 11160.00      | Peak     | H               | -                   | -                          | -73.11               | 18.49       | 0.00                            | 52.38                   | 73.98          | -21.60      |
| 16740.00        | Peak     | V               | -                   | -                          | -73.62               | 28.09       | 0.00                            | 61.47                   | 68.23          | -6.76       |
| * 22320.00      | Average  | H               | -                   | -                          | -69.03               | -7.57       | -9.54                           | 20.86                   | 53.98          | -33.12      |
| * 22320.00      | Peak     | H               | -                   | -                          | -56.90               | -7.64       | -9.54                           | 32.92                   | 73.98          | -41.06      |
| 27900.00        | Peak     | V               | -                   | -                          | -57.03               | -4.75       | -9.54                           | 35.68                   | 68.23          | -32.56      |
| 33480.00        | Peak     | H               | -                   | -                          | -55.29               | -4.38       | -9.54                           | 37.79                   | 68.23          | -30.44      |

**Table 7-238. Radiated Measurements CDD Diversity (RU242)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 194 of 380                   |

V 10.6 10/27/2023

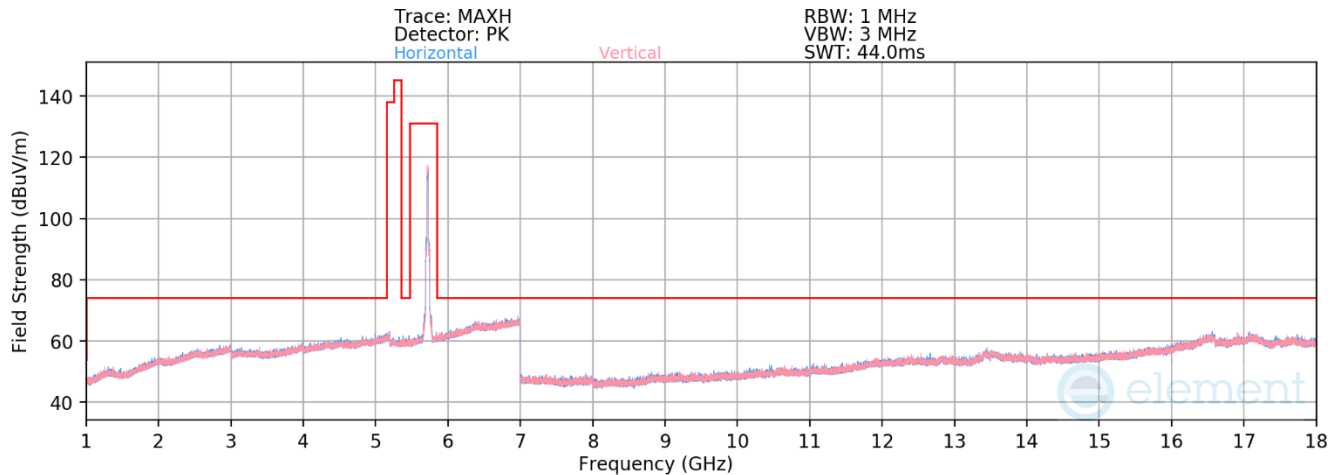

**Plot 7-327. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.144 – RU242)**


Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 5720MHz  
Channel: 144

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 11440.00      | Average  | V               | -                   | -                          | -84.90               | 18.81       | 40.91                   | 53.98          | -13.07      |
| * 11440.00      | Peak     | V               | -                   | -                          | -73.07               | 18.81       | 52.74                   | 73.98          | -21.24      |
| 17160.00        | Peak     | V               | -                   | -                          | -73.04               | 28.13       | 62.10                   | 68.23          | -6.13       |

**Table 7-239. Radiated Measurements CDD Diversity (RU242)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 195 of 380                   |

V 10.6 10/27/2023

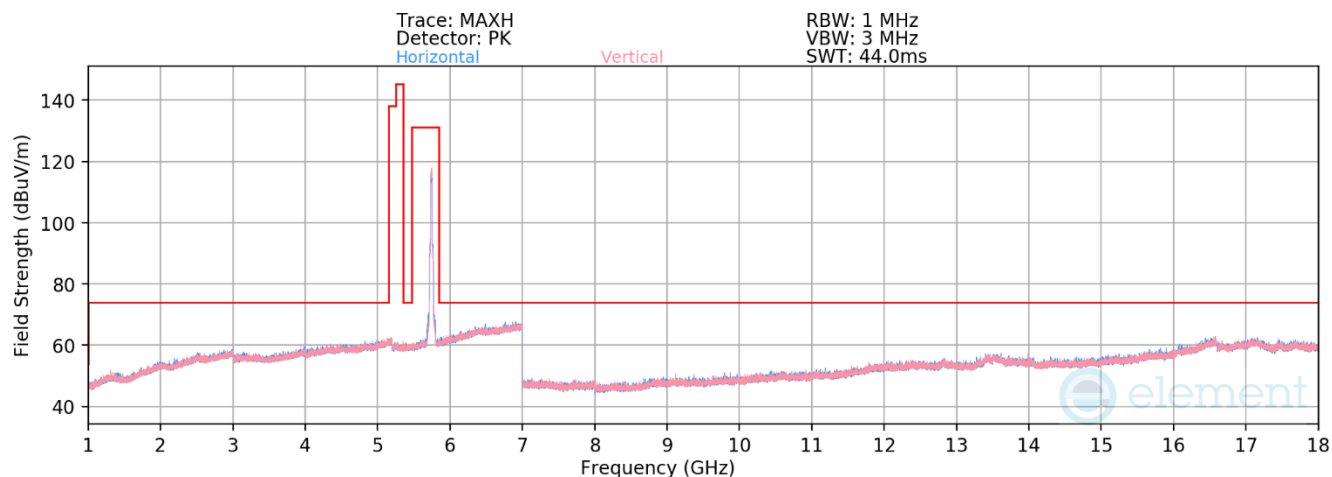

**Plot 7-328. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.149 – RU242)**


Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 5745MHz  
Channel: 149

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 11490.00      | Average  | V               | -                   | -                          | -84.57               | 18.94       | 41.37                   | 53.98          | -12.61      |
| * 11490.00      | Peak     | V               | -                   | -                          | -73.10               | 18.94       | 52.84                   | 73.98          | -21.14      |
| 17235.00        | Peak     | V               | -                   | -                          | -73.35               | 27.89       | 61.54                   | 68.23          | -6.69       |


**Table 7-240. Radiated Measurements CDD Diversity (RU242)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 196 of 380                   |

V 10.6 10/27/2023

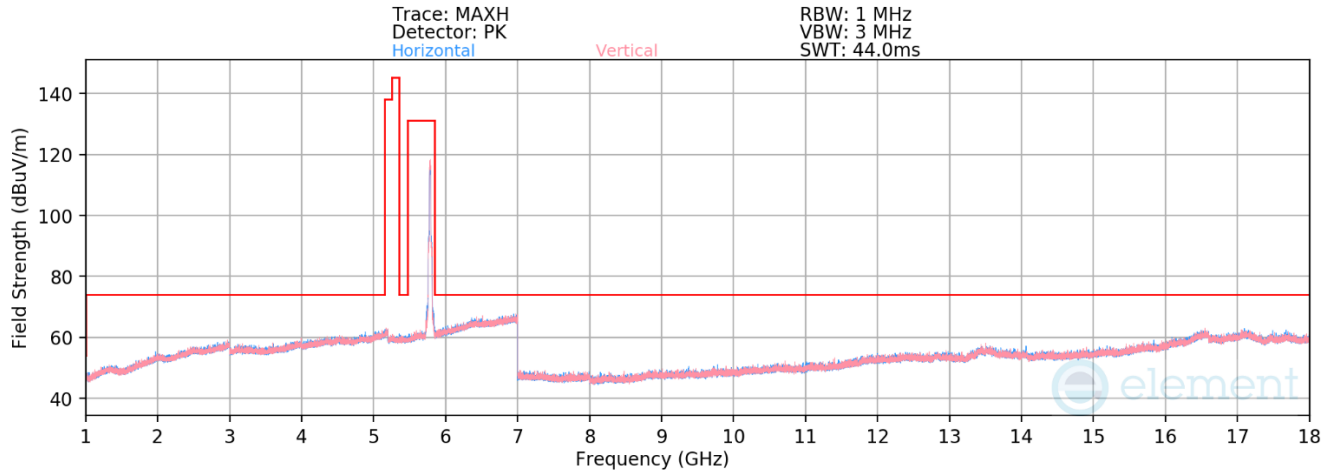

**Plot 7-329. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.157 – RU242)**

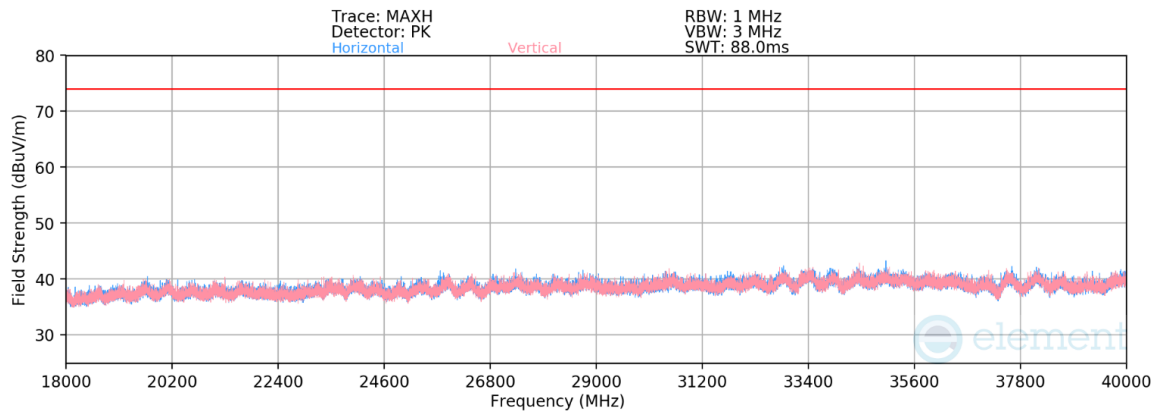

**Plot 7-330. Radiated Spurious Emissions 18 GHz - 40GHz CDD Diversity (11be Ch.157 — RU242)**

Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 5785MHz  
Channel: 157


| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11570.00      | Average  | H               | -                   | -                          | -84.97               | 19.10       | 0.00                            | 41.13                   | 53.98          | -12.85      |
| * 11570.00      | Peak     | H               | -                   | -                          | -72.56               | 19.10       | 0.00                            | 53.54                   | 73.98          | -20.44      |
| 17355.00        | Peak     | H               | -                   | -                          | -73.46               | 28.06       | 0.00                            | 61.60                   | 68.23          | -6.63       |
| 23140.00        | Peak     | V               | -                   | -                          | -58.53               | -7.13       | -9.54                           | 31.80                   | 68.23          | -36.43      |
| 28925.00        | Peak     | H               | -                   | -                          | -56.31               | -3.95       | -9.54                           | 37.20                   | 68.23          | -31.03      |
| 34710.00        | Peak     | V               | -                   | -                          | -56.17               | -4.65       | -9.54                           | 36.64                   | 68.23          | -31.59      |

**Table 7-241. Radiated Measurements CDD Diversity (RU242)**

|                                            |                                                                                     |                                       |  |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|--|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            |  | Page 197 of 380                   |

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

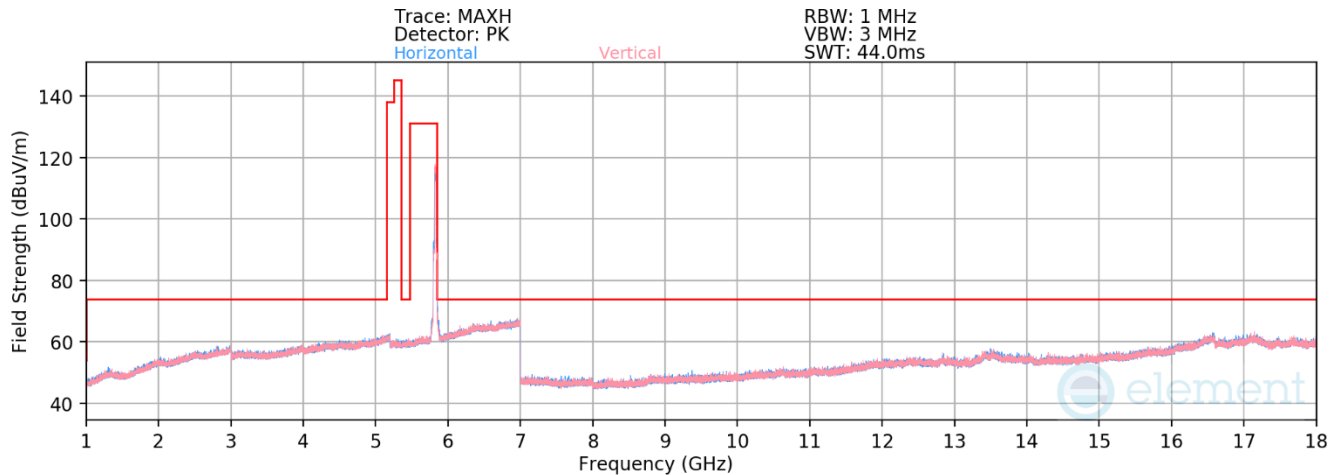

**Plot 7-331. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.165 – RU242)**

Mode: 802.11be (20MHz BW)  
Data Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 5825MHz  
Channel: 165

|   | Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|---|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * | 11650.00        | Average  | H               | -                   | -                          | -84.64               | 19.48       | 41.84                   | 53.98          | -12.14      |
| * | 11650.00        | Peak     | H               | -                   | -                          | -73.17               | 19.48       | 53.31                   | 73.98          | -20.67      |
|   | 17475.00        | Peak     | H               | -                   | -                          | -75.04               | 28.82       | 60.78                   | 68.23          | -7.45       |


**Table 7-242. Radiated Measurements CDD Diversity (RU242)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 198 of 380                   |


V 10.6 10/27/2023

## 7.6.3 Antenna 5T Radiated Band Edge Measurements (20MHz BW)


### RU26

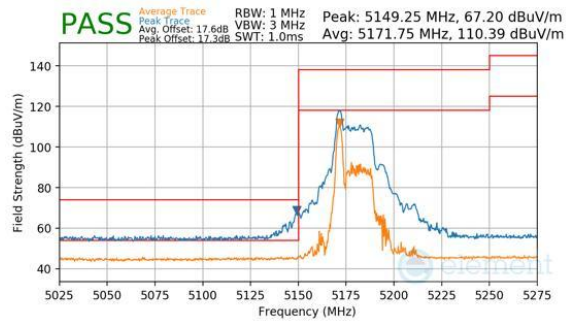


Plot 7-332. Antenna 5T (Peak & Average, RU26, Index 0, Ch.36, MCS11)

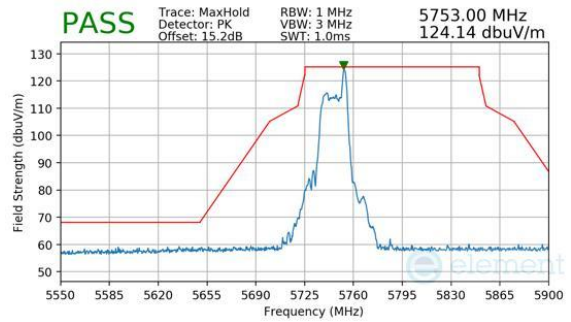


Plot 7-335. Antenna 5T (Peak, RU26, Index 8, Ch.149, MCS11)

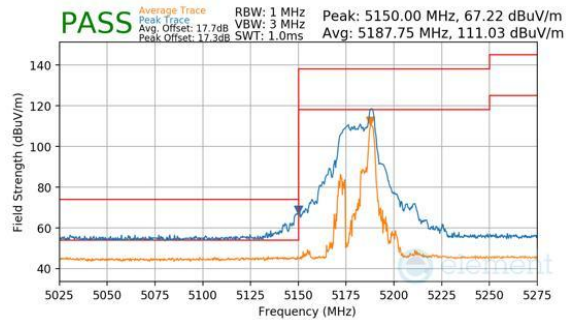


Plot 7-333. Antenna 5T (Peak & Average, RU26, Index 8, Ch.36, MCS11)

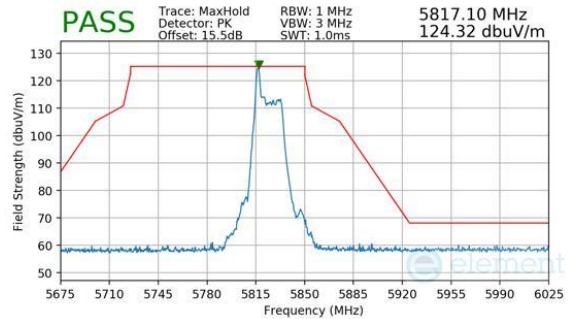

Plot 7-336. Antenna 5T (Peak, RU26, Index 0, Ch.165, MCS11)

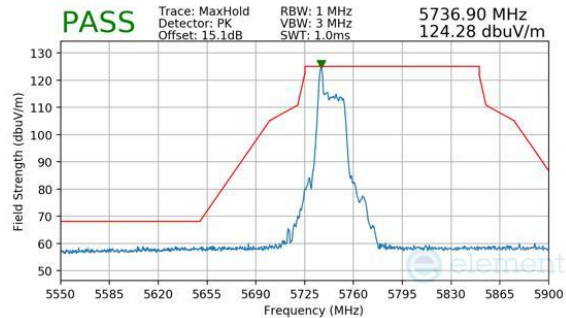

Plot 7-334. Antenna 5T (Peak, RU26, Index 0, Ch.149, MCS11)

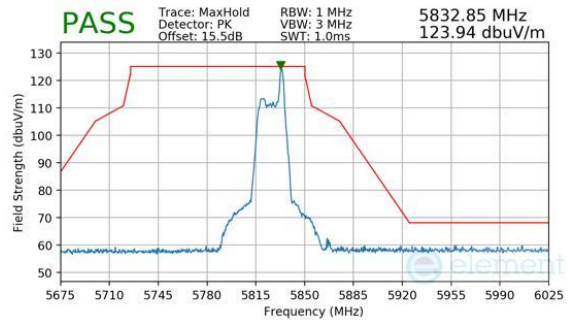

Plot 7-337. Antenna 5T (Peak, RU26, Index 8, Ch.165, MCS11)

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-23-R2.BCG | Test Dates:<br>08/22/2025 - 1/19/2025                                               | EUT Type:<br>Tablet Device            | Page 199 of 380                   |

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).