

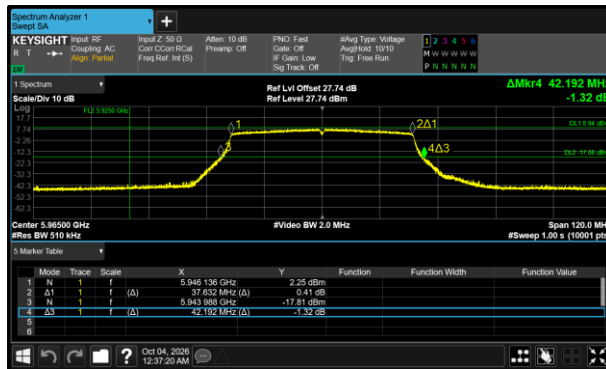


Figure 251 - 802.11ax HE40 SU SP Minimum 26 dB EBW

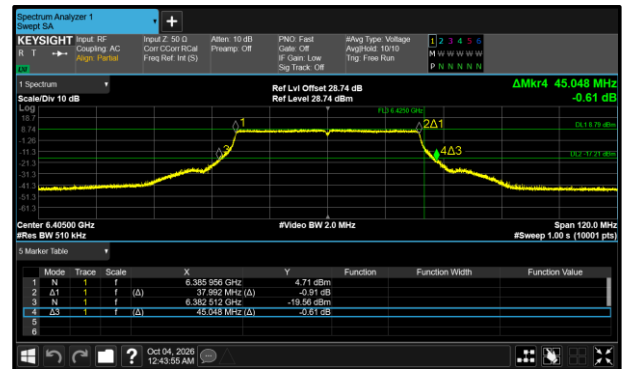


Figure 252 - 802.11ax HE40 SU SP Maximum 26 dB EBW

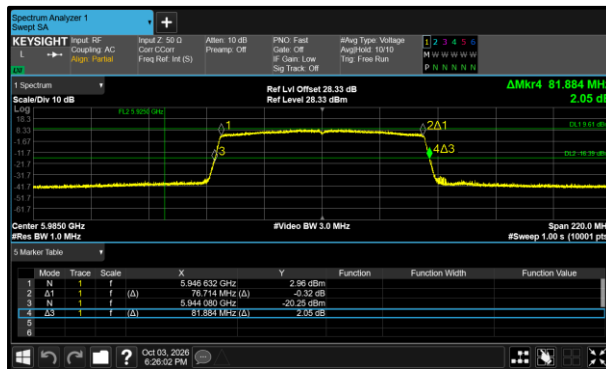


Figure 253 - 802.11ax HE80 SU SP Minimum 26 dB EBW



Figure 254 - 802.11ax HE80 SU SP Maximum 26 dB EBW

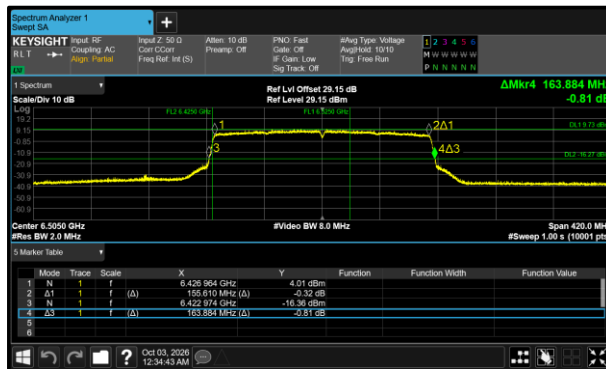


Figure 255 - 802.11ax HE160 SU SP Minimum 26 dB EBW



Figure 256 - 802.11ax HE160 SU SP Maximum 26 dB EBW

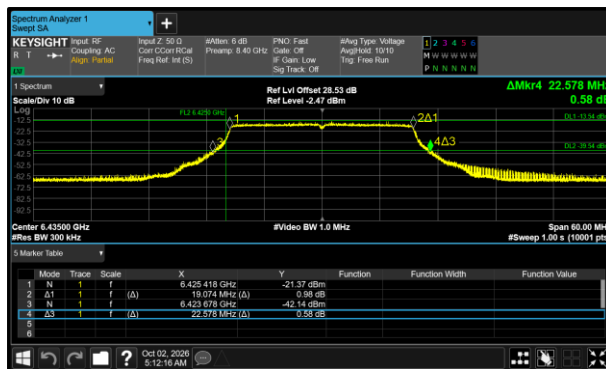


Figure 257 - 802.11ax HE20 SU VLP Minimum 26 dB EBW

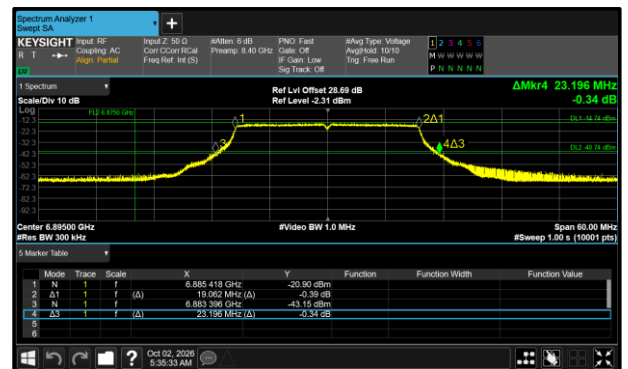


Figure 258 - 802.11ax HE20 SU VLP Maximum 26 dB EBW

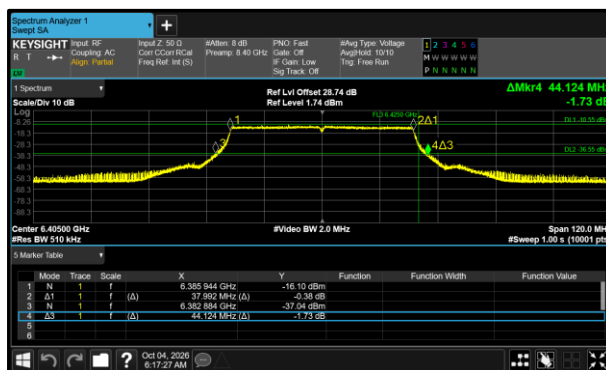


Figure 259 - 802.11ax HE40 SU VLP Minimum 26 dB EBW

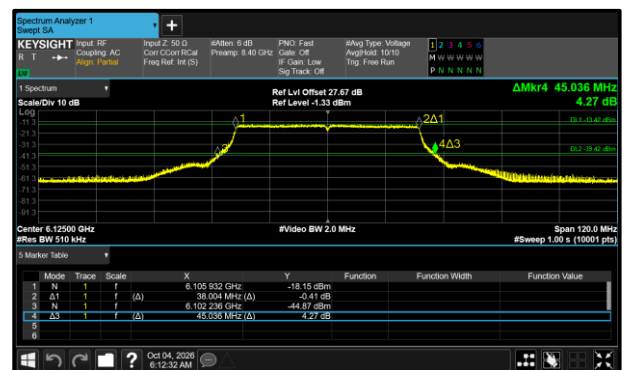


Figure 260 - 802.11ax HE40 SU VLP Maximum 26 dB EBW

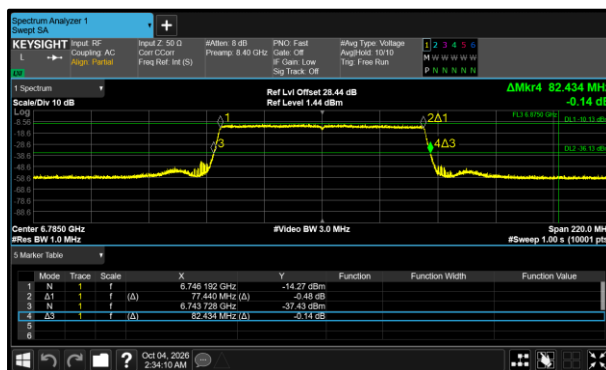


Figure 261 - 802.11ax HE80 SU VLP Minimum 26 dB EBW

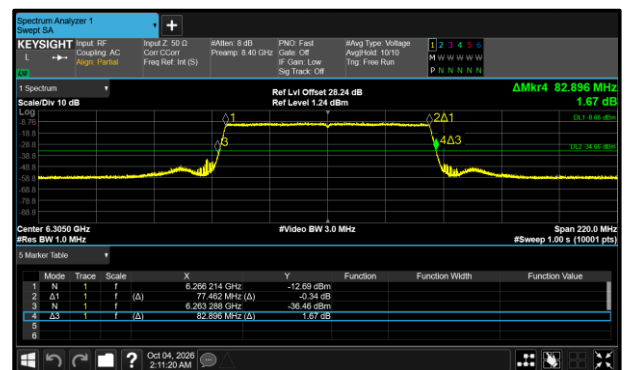


Figure 262 - 802.11ax HE80 SU VLP Maximum 26 dB EBW

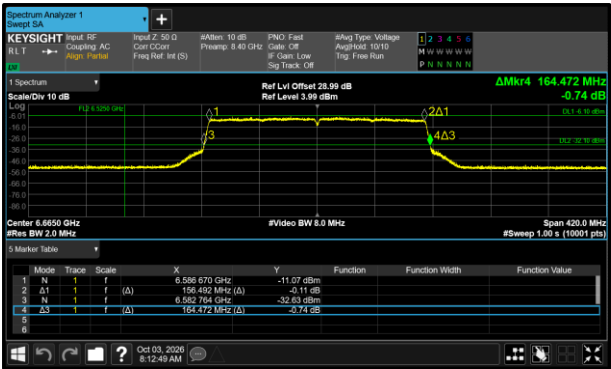


Figure 263 - 802.11ax HE160 SU VLP Minimum
26 dB EBW

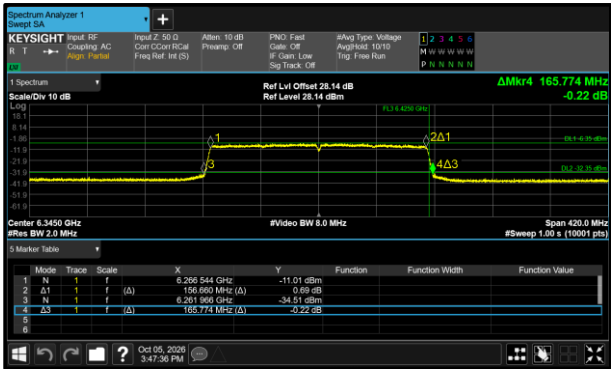


Figure 264 - 802.11ax HE160 SU VLP Maximum
26 dB EBW



Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE20 SU LPI	19.056	19.080
802.11ax HE40 SU LPI	37.992	38.064
802.11ax HE80 SU LPI	77.440	77.528
802.11ax HE160 SU LPI	156.324	156.534
802.11ax HE20 SU SP	18.786	19.086
802.11ax HE40 SU SP	37.620	38.028
802.11ax HE80 SU SP	76.692	77.462
802.11ax HE160 SU SP	155.442	155.736
802.11ax HE20 SU VLP	19.050	19.086
802.11ax HE40 SU VLP	37.980	38.028
802.11ax HE80 SU VLP	77.396	77.506
802.11ax HE160 SU VLP	156.324	156.660

Table 16 - 99% Bandwidth Summary Results - TxBF

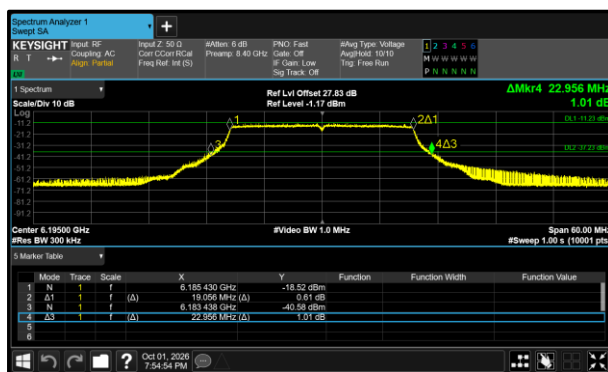


Figure 265 - 802.11ax HE20 SU LPI Minimum 99% OBW

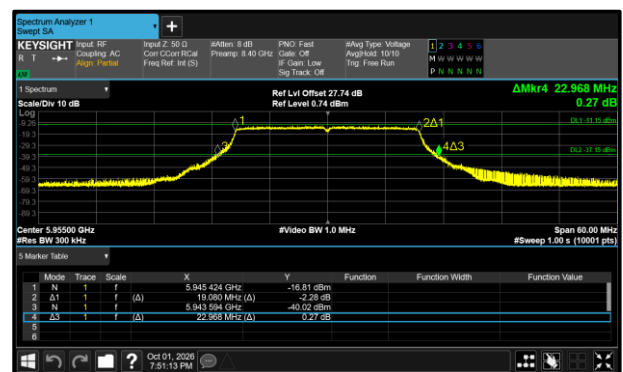


Figure 266 - 802.11ax HE20 SU LPI Maximum 99% OBW

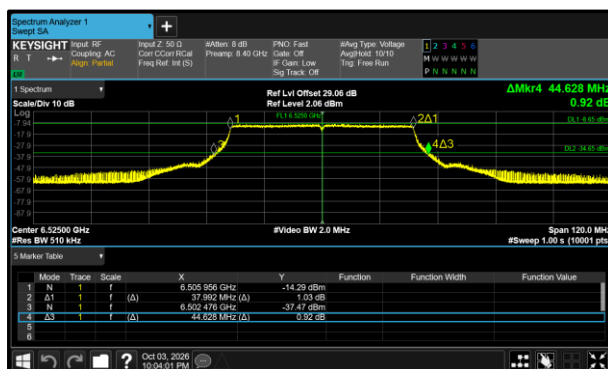


Figure 267 - 802.11ax HE40 SU LPI Minimum 99% OBW

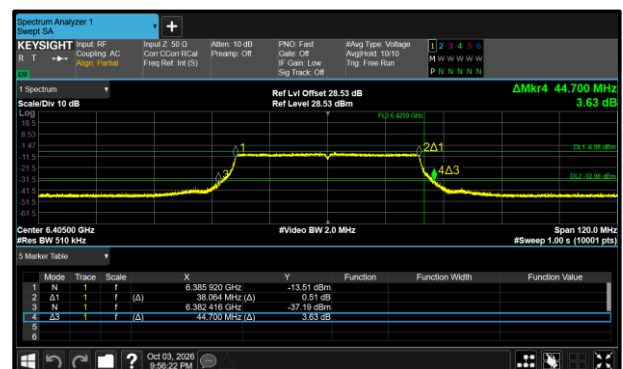


Figure 268 - 802.11ax HE40 SU LPI Maximum 99% OBW

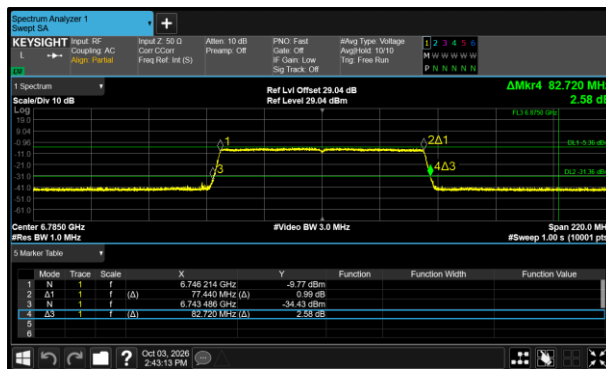


Figure 269 - 802.11ax HE80 SU LPI Minimum
99% OBW

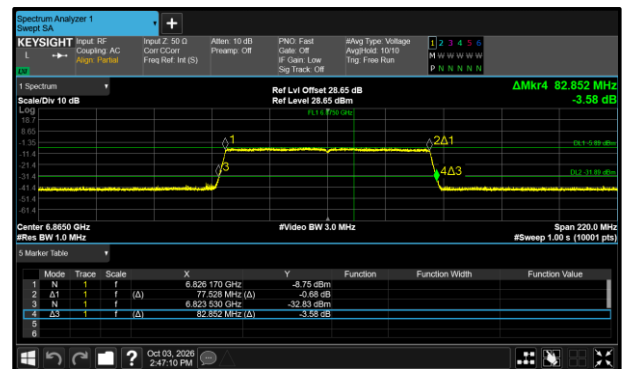


Figure 270 - 802.11ax HE80 SU LPI Maximum
99% OBW

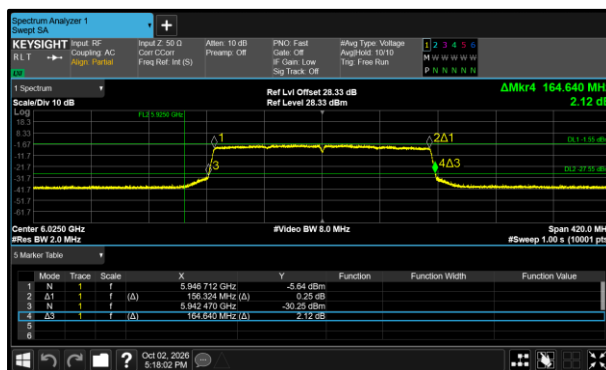


Figure 271 - 802.11ax HE160 SU LPI Minimum
99% OBW

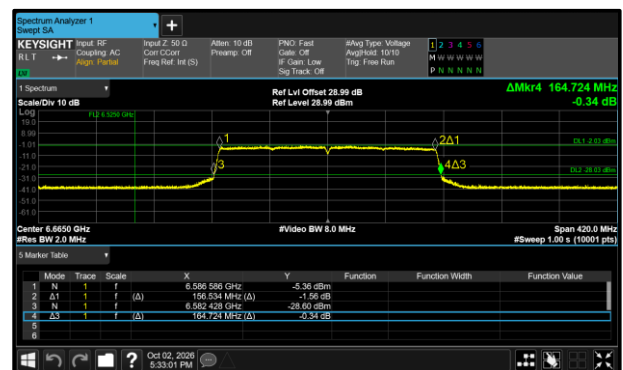


Figure 272 - 802.11ax HE160 SU LPI Maximum
99% OBW

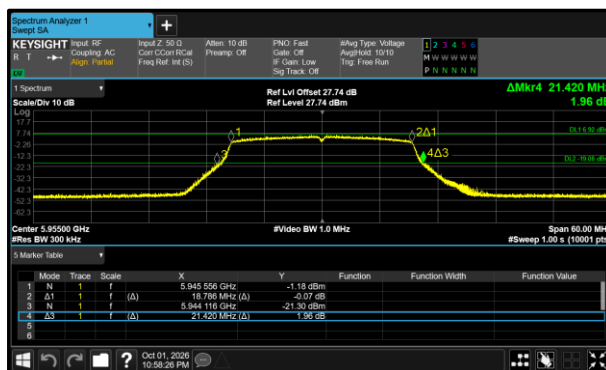


Figure 273 - 802.11ax HE20 SU SP Minimum 99%
OBW

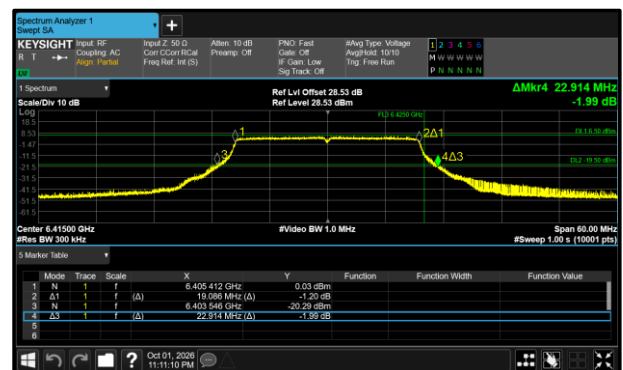


Figure 274 - 802.11ax HE20 SU SP Maximum
99% OBW

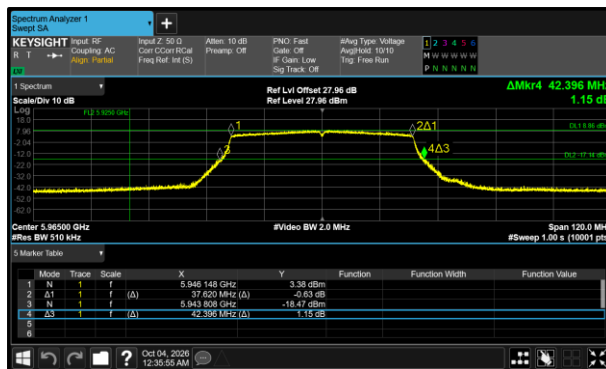


Figure 275 - 802.11ax HE40 SU SP Minimum 99% OBW

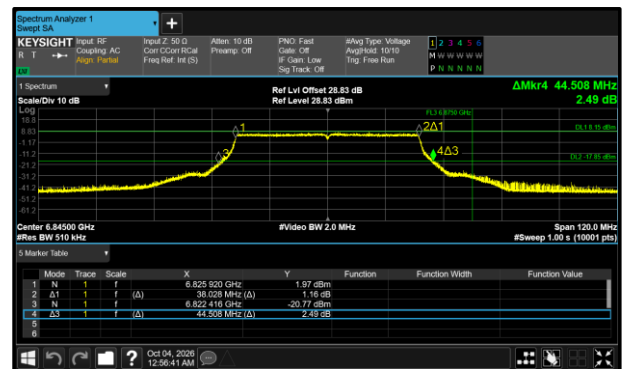


Figure 276 - 802.11ax HE40 SU SP Maximum 99% OBW

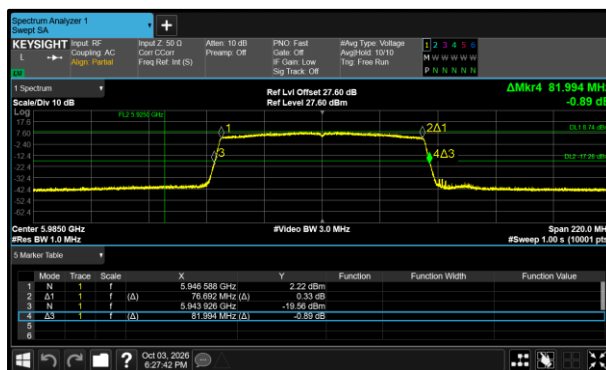


Figure 277 - 802.11ax HE80 SU SP Minimum 99% OBW



Figure 278 - 802.11ax HE80 SU SP Maximum 99% OBW

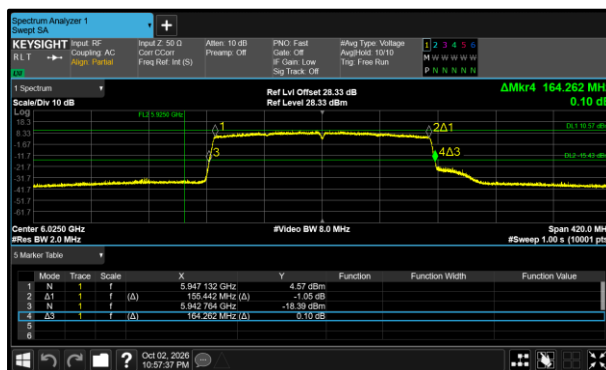


Figure 279 - 802.11ax HE160 SU SP Minimum 99% OBW



Figure 280 - 802.11ax HE160 SU SP Maximum 99% OBW

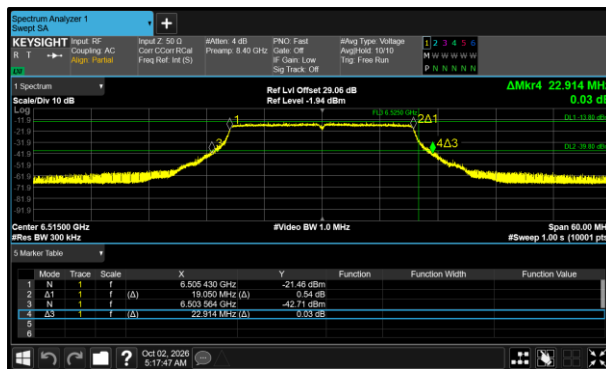


Figure 281 - 802.11ax HE20 SU VLP Minimum
99% OBW

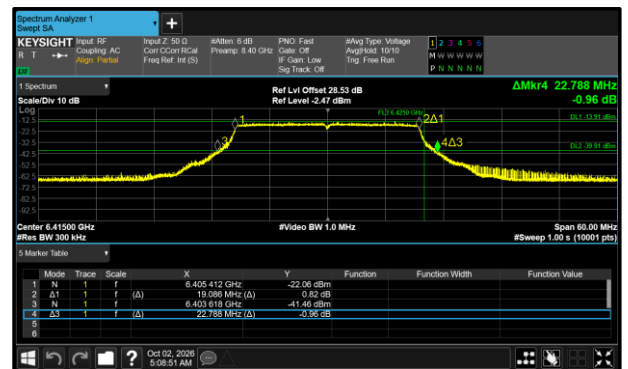


Figure 282 - 802.11ax HE20 SU VLP Maximum
99% OBW

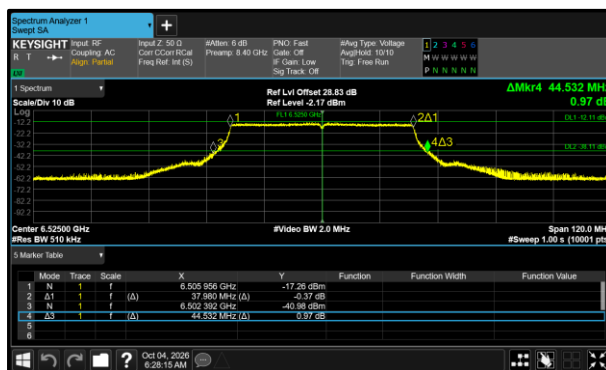


Figure 283 - 802.11ax HE40 SU VLP Minimum
99% OBW

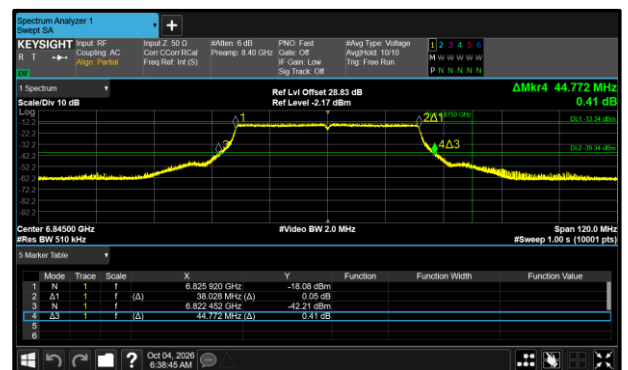


Figure 284 - 802.11ax HE40 SU VLP Maximum
99% OBW

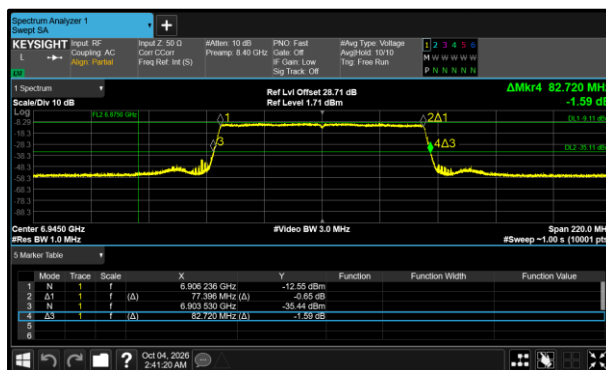


Figure 285 - 802.11ax HE80 SU VLP Minimum
99% OBW

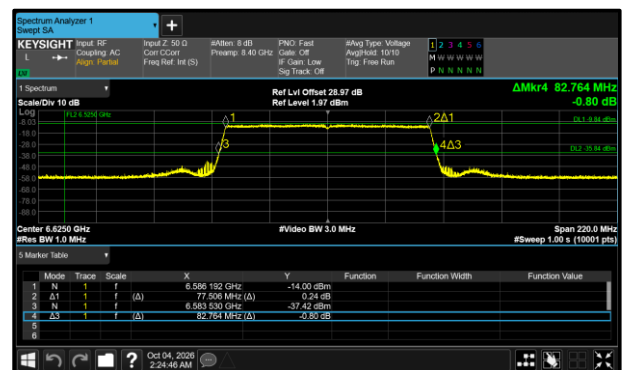


Figure 286 - 802.11ax HE80 SU VLP Maximum
99% OBW

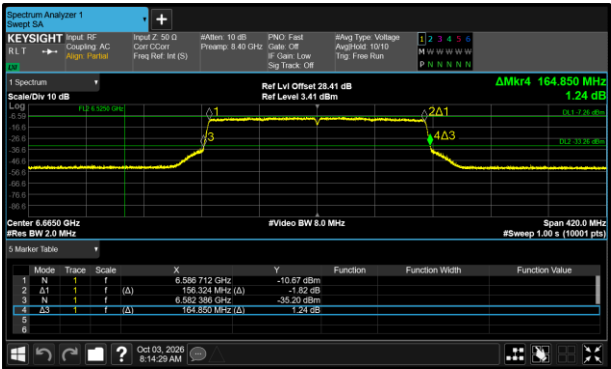


Figure 287 - 802.11ax HE160 SU VLP Minimum
99% OBW

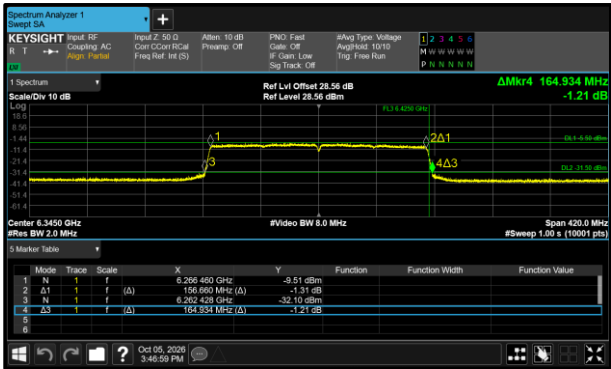


Figure 288 - 802.11ax HE160 SU VLP Maximum
99% OBW



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	21.756	-	-	-	320.0
6195	21.834	-	-	-	320.0
6415	21.918	-	-	-	320.0
6435	21.720	-	-	-	320.0
6475	21.696	-	-	-	320.0
6515	21.534	-	-	-	320.0
6535	21.834	-	-	-	320.0
6695	21.876	-	-	-	320.0
6855	21.762	-	-	-	320.0
6875	21.948	-	-	-	320.0
6895	21.846	-	-	-	320.0
7015	21.708	-	-	-	320.0
7095	21.876	-	-	-	320.0
7115	19.692	-	-	-	320.0

Table 17 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	16.770	-	-	-	320.0
6195	16.758	-	-	-	320.0
6415	16.764	-	-	-	320.0
6435	16.764	-	-	-	320.0
6475	16.776	-	-	-	320.0
6515	16.758	-	-	-	320.0
6535	16.770	-	-	-	320.0
6695	16.770	-	-	-	320.0
6855	16.770	-	-	-	320.0
6875	16.776	-	-	-	320.0
6895	16.770	-	-	-	320.0
7015	16.764	-	-	-	320.0
7095	16.770	-	-	-	320.0
7115	16.380	-	-	-	320.0

Table 18 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	43.812	-	-	-	320.0
6205	43.632	-	-	-	320.0
6365	43.632	-	-	-	320.0
6405	43.764	-	-	-	320.0
6445	44.040	-	-	-	320.0
6485	43.740	-	-	-	320.0
6525	43.788	-	-	-	320.0
6565	43.680	-	-	-	320.0
6725	44.364	-	-	-	320.0
6845	43.956	-	-	-	320.0
6885	44.304	-	-	-	320.0
6925	44.016	-	-	-	320.0
7005	43.728	-	-	-	320.0
7085	43.944	-	-	-	320.0

Table 19 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	36.660	-	-	-	320.0
6205	36.672	-	-	-	320.0
6365	36.672	-	-	-	320.0
6405	36.660	-	-	-	320.0
6445	36.648	-	-	-	320.0
6485	36.672	-	-	-	320.0
6525	36.696	-	-	-	320.0
6565	36.684	-	-	-	320.0
6725	36.672	-	-	-	320.0
6845	36.684	-	-	-	320.0
6885	36.672	-	-	-	320.0
6925	36.660	-	-	-	320.0
7005	36.660	-	-	-	320.0
7085	36.672	-	-	-	320.0

Table 20 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	115.800	-	-	-	320.0
6225	118.152	-	-	-	320.0
6305	115.056	-	-	-	320.0
6385	116.664	-	-	-	320.0
6465	115.680	-	-	-	320.0
6545	116.568	-	-	-	320.0
6625	116.760	-	-	-	320.0
6705	113.376	-	-	-	320.0
6785	116.832	-	-	-	320.0
6865	114.672	-	-	-	320.0
6945	114.576	-	-	-	320.0
7025	114.888	-	-	-	320.0

Table 21 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	77.328	-	-	-	320.0
6225	77.400	-	-	-	320.0
6305	77.352	-	-	-	320.0
6385	77.616	-	-	-	320.0
6465	77.424	-	-	-	320.0
6545	77.376	-	-	-	320.0
6625	77.448	-	-	-	320.0
6705	77.304	-	-	-	320.0
6785	77.352	-	-	-	320.0
6865	77.472	-	-	-	320.0
6945	77.352	-	-	-	320.0
7025	77.376	-	-	-	320.0

Table 22 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	164.514	-	-	-	320.0
6185	164.850	-	-	-	320.0
6345	164.682	-	-	-	320.0
6505	164.976	-	-	-	320.0
6665	164.304	-	-	-	320.0
6825	165.018	-	-	-	320.0
6985	164.472	-	-	-	320.0

Table 23 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	155.022	-	-	-	320.0
6185	155.022	-	-	-	320.0
6345	155.106	-	-	-	320.0
6505	155.190	-	-	-	320.0
6665	155.190	-	-	-	320.0
6825	155.148	-	-	-	320.0
6985	155.106	-	-	-	320.0

Table 24 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	22.902	-	-	-	320.0
6195	22.740	-	-	-	320.0
6395	23.028	-	-	-	320.0
6415	22.866	-	-	-	320.0
6435	23.070	-	-	-	320.0
6475	22.806	-	-	-	320.0
6515	23.340	-	-	-	320.0
6535	23.016	-	-	-	320.0
6695	22.920	-	-	-	320.0
6855	22.698	-	-	-	320.0
6875	22.860	-	-	-	320.0
6895	22.920	-	-	-	320.0
6995	23.304	-	-	-	320.0
7095	22.968	-	-	-	320.0

Table 25 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	19.068	-	-	-	320.0
6195	19.068	-	-	-	320.0
6395	19.068	-	-	-	320.0
6415	19.068	-	-	-	320.0
6435	19.068	-	-	-	320.0
6475	19.074	-	-	-	320.0
6515	19.056	-	-	-	320.0
6535	19.080	-	-	-	320.0
6695	19.062	-	-	-	320.0
6855	19.062	-	-	-	320.0
6875	19.074	-	-	-	320.0
6895	19.068	-	-	-	320.0
6995	19.068	-	-	-	320.0
7095	19.068	-	-	-	320.0

Table 26 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	44.616	-	-	-	320.0
6205	44.868	-	-	-	320.0
6405	44.724	-	-	-	320.0
6445	44.508	-	-	-	320.0
6485	44.640	-	-	-	320.0
6525	45.156	-	-	-	320.0
6565	44.724	-	-	-	320.0
6725	44.832	-	-	-	320.0
6845	44.472	-	-	-	320.0
6885	44.760	-	-	-	320.0
6925	44.676	-	-	-	320.0
7005	44.892	-	-	-	320.0
7085	44.712	-	-	-	320.0

Table 27 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	38.028	-	-	-	320.0
6205	37.992	-	-	-	320.0
6405	38.004	-	-	-	320.0
6445	37.992	-	-	-	320.0
6485	38.016	-	-	-	320.0
6525	37.992	-	-	-	320.0
6565	38.016	-	-	-	320.0
6725	38.016	-	-	-	320.0
6845	38.016	-	-	-	320.0
6885	38.004	-	-	-	320.0
6925	38.016	-	-	-	320.0
7005	37.992	-	-	-	320.0
7085	38.004	-	-	-	320.0

Table 28 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	82.786	-	-	-	320.0
6225	83.072	-	-	-	320.0
6305	82.676	-	-	-	320.0
6385	82.874	-	-	-	320.0
6465	82.588	-	-	-	320.0
6545	82.588	-	-	-	320.0
6625	82.588	-	-	-	320.0
6705	82.742	-	-	-	320.0
6785	82.456	-	-	-	320.0
6865	82.918	-	-	-	320.0
6945	82.632	-	-	-	320.0
7025	82.368	-	-	-	320.0

Table 29 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	77.418	-	-	-	320.0
6225	77.440	-	-	-	320.0
6305	77.418	-	-	-	320.0
6385	77.484	-	-	-	320.0
6465	77.440	-	-	-	320.0
6545	77.462	-	-	-	320.0
6625	77.462	-	-	-	320.0
6705	77.462	-	-	-	320.0
6785	77.396	-	-	-	320.0
6865	77.462	-	-	-	320.0
6945	77.396	-	-	-	320.0
7025	77.462	-	-	-	320.0

Table 30 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCC (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	164.640	-	-	-	320.0
6185	164.472	-	-	-	320.0
6345	164.514	-	-	-	320.0
6505	164.724	-	-	-	320.0
6665	165.060	-	-	-	320.0
6825	165.186	-	-	-	320.0
6985	164.640	-	-	-	320.0

Table 31 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	156.198	-	-	-	320.0
6185	156.282	-	-	-	320.0
6345	156.366	-	-	-	320.0
6505	156.408	-	-	-	320.0
6665	156.450	-	-	-	320.0
6825	156.366	-	-	-	320.0
6985	156.366	-	-	-	320.0

Table 32 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	19.740	-	-	-	320.0
6195	21.882	-	-	-	320.0
6415	21.822	-	-	-	320.0
6535	21.726	-	-	-	320.0
6695	21.750	-	-	-	320.0
6855	21.606	-	-	-	320.0

Table 33 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	16.374	-	-	-	320.0
6195	16.758	-	-	-	320.0
6415	16.764	-	-	-	320.0
6535	16.770	-	-	-	320.0
6695	16.758	-	-	-	320.0
6855	16.764	-	-	-	320.0

Table 34 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	44.220	-	-	-	320.0
6205	53.964	-	-	-	320.0
6405	54.648	-	-	-	320.0
6565	52.512	-	-	-	320.0
6725	53.532	-	-	-	320.0
6845	64.104	-	-	-	320.0

Table 35 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	36.336	-	-	-	320.0
6205	36.852	-	-	-	320.0
6405	36.924	-	-	-	320.0
6565	36.816	-	-	-	320.0
6725	36.828	-	-	-	320.0
6845	37.056	-	-	-	320.0

Table 36 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	96.162	-	-	-	320.0
6225	133.224	-	-	-	320.0
6385	132.340	-	-	-	320.0
6625	133.224	-	-	-	320.0
6705	117.864	-	-	-	320.0
6785	116.350	-	-	-	320.0

Table 37 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	75.702	-	-	-	320.0
6225	85.878	-	-	-	320.0
6385	85.800	-	-	-	320.0
6625	85.410	-	-	-	320.0
6705	78.264	-	-	-	320.0
6785	78.676	-	-	-	320.0

Table 38 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	165.858	-	-	-	320.0
6185	165.900	-	-	-	320.0
6345	167.160	-	-	-	320.0
6665	165.480	-	-	-	320.0

Table 39 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	154.434	-	-	-	320.0
6185	154.560	-	-	-	320.0
6345	154.686	-	-	-	320.0
6665	154.644	-	-	-	320.0

Table 40 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	21.498	-	-	-	320.0
6195	22.704	-	-	-	320.0
6415	22.884	-	-	-	320.0
6535	23.238	-	-	-	320.0
6695	22.926	-	-	-	320.0
6855	22.776	-	-	-	320.0

Table 41 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	18.792	-	-	-	320.0
6195	19.068	-	-	-	320.0
6415	19.080	-	-	-	320.0
6535	19.074	-	-	-	320.0
6695	19.074	-	-	-	320.0
6855	19.062	-	-	-	320.0

Table 42 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	42.624	-	-	-	320.0
6205	44.352	-	-	-	320.0
6405	44.856	-	-	-	320.0
6565	44.448	-	-	-	320.0
6725	44.484	-	-	-	320.0
6845	45.072	-	-	-	320.0

Table 43 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	37.608	-	-	-	320.0
6205	38.016	-	-	-	320.0
6405	38.016	-	-	-	320.0
6565	38.016	-	-	-	320.0
6725	38.004	-	-	-	320.0
6845	38.004	-	-	-	320.0

Table 44 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	81.510	-	-	-	320.0
6225	82.764	-	-	-	320.0
6385	82.720	-	-	-	320.0
6625	82.896	-	-	-	320.0
6705	82.412	-	-	-	320.0
6785	82.632	-	-	-	320.0

Table 45 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	76.692	-	-	-	320.0
6225	77.440	-	-	-	320.0
6385	77.462	-	-	-	320.0
6625	77.440	-	-	-	320.0
6705	77.462	-	-	-	320.0
6785	77.396	-	-	-	320.0

Table 46 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	164.094	-	-	-	320.0
6185	163.884	-	-	-	320.0
6345	163.800	-	-	-	320.0
6665	164.178	-	-	-	320.0

Table 47 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	155.484	-	-	-	320.0
6185	155.568	-	-	-	320.0
6345	155.652	-	-	-	320.0
6665	155.736	-	-	-	320.0

Table 48 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6435	22.008	-	-	-	320.0
6475	21.576	-	-	-	320.0
6515	21.846	-	-	-	320.0

Table 49 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6435	16.764	-	-	-	320.0
6475	16.770	-	-	-	320.0
6515	16.752	-	-	-	320.0

Table 50 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6445	52.872	-	-	-	320.0
6485	51.228	-	-	-	320.0
6525	51.756	-	-	-	320.0

Table 51 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6445	36.804	-	-	-	320.0
6485	36.840	-	-	-	320.0
6525	36.816	-	-	-	320.0

Table 52 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-6 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6465	116.532	-	-	-	320.0
6545	115.908	-	-	-	320.0

Table 53 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6465	79.066	-	-	-	320.0
6545	79.690	-	-	-	320.0

Table 54 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6505	166.782	-	-	-	320.0

Table 55 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6505	154.644	-	-	-	320.0

Table 56 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6435	22.968	-	-	-	320.0
6475	22.944	-	-	-	320.0
6515	23.040	-	-	-	320.0

Table 57 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6435	19.062	-	-	-	320.0
6475	19.080	-	-	-	320.0
6515	19.068	-	-	-	320.0

Table 58 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6445	44.172	-	-	-	320.0
6485	44.412	-	-	-	320.0
6525	44.628	-	-	-	320.0

Table 59 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6445	37.992	-	-	-	320.0
6485	38.016	-	-	-	320.0
6525	37.980	-	-	-	320.0

Table 60 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-6 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6465	82.632	-	-	-	320.0
6545	82.654	-	-	-	320.0

Table 61 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6465	77.462	-	-	-	320.0
6545	77.440	-	-	-	320.0

Table 62 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6505	164.472	-	-	-	320.0

Table 63 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6505	155.694	-	-	-	320.0

Table 64 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	21.762	-	-	-	320.0
6275	21.678	-	-	-	320.0
6415	21.744	-	-	-	320.0
6435	21.774	-	-	-	320.0
6475	22.056	-	-	-	320.0
6515	21.732	-	-	-	320.0
6535	21.630	-	-	-	320.0
6695	21.852	-	-	-	320.0
6855	21.876	-	-	-	320.0
6875	21.972	-	-	-	320.0
6895	21.942	-	-	-	320.0
7015	22.008	-	-	-	320.0
7095	22.044	-	-	-	320.0
7115	19.956	-	-	-	320.0

Table 65 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	16.776	-	-	-	320.0
6275	16.752	-	-	-	320.0
6415	16.776	-	-	-	320.0
6435	16.758	-	-	-	320.0
6475	16.776	-	-	-	320.0
6515	16.758	-	-	-	320.0
6535	16.770	-	-	-	320.0
6695	16.758	-	-	-	320.0
6855	16.770	-	-	-	320.0
6875	16.764	-	-	-	320.0
6895	16.770	-	-	-	320.0
7015	16.782	-	-	-	320.0
7095	16.770	-	-	-	320.0
7115	16.386	-	-	-	320.0

Table 66 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6125	43.716	-	-	-	320.0
6285	44.352	-	-	-	320.0
6365	43.788	-	-	-	320.0
6405	44.124	-	-	-	320.0
6445	44.052	-	-	-	320.0
6485	44.112	-	-	-	320.0
6525	43.404	-	-	-	320.0
6565	44.136	-	-	-	320.0
6725	44.040	-	-	-	320.0
6845	44.172	-	-	-	320.0
6885	44.028	-	-	-	320.0
6925	44.004	-	-	-	320.0
7005	43.896	-	-	-	320.0
7085	43.692	-	-	-	320.0

Table 67 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6125	36.708	-	-	-	320.0
6285	36.672	-	-	-	320.0
6365	36.672	-	-	-	320.0
6405	36.708	-	-	-	320.0
6445	36.696	-	-	-	320.0
6485	36.732	-	-	-	320.0
6525	36.684	-	-	-	320.0
6565	36.732	-	-	-	320.0
6725	36.708	-	-	-	320.0
6845	36.708	-	-	-	320.0
6885	36.708	-	-	-	320.0
6925	36.672	-	-	-	320.0
7005	36.684	-	-	-	320.0
7085	36.684	-	-	-	320.0

Table 68 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6145	116.568	-	-	-	320.0
6305	116.208	-	-	-	320.0
6385	114.600	-	-	-	320.0
6465	116.094	-	-	-	320.0
6545	115.674	-	-	-	320.0
6625	116.616	-	-	-	320.0
6705	113.880	-	-	-	320.0
6785	117.504	-	-	-	320.0
6865	115.728	-	-	-	320.0
6945	114.504	-	-	-	320.0
7025	122.904	-	-	-	320.0

Table 69 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6145	77.376	-	-	-	320.0
6305	77.424	-	-	-	320.0
6385	77.736	-	-	-	320.0
6465	77.440	-	-	-	320.0
6545	77.662	-	-	-	320.0
6625	77.592	-	-	-	320.0
6705	77.472	-	-	-	320.0
6785	77.376	-	-	-	320.0
6865	77.712	-	-	-	320.0
6945	77.496	-	-	-	320.0
7025	77.496	-	-	-	320.0

Table 70 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6185	164.766	-	-	-	320.0
6345	164.178	-	-	-	320.0
6505	164.766	-	-	-	320.0
6665	165.774	-	-	-	320.0
6825	164.556	-	-	-	320.0
6985	164.472	-	-	-	320.0

Table 71 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6185	155.106	-	-	-	320.0
6345	155.190	-	-	-	320.0
6505	155.274	-	-	-	320.0
6665	155.274	-	-	-	320.0
6825	155.190	-	-	-	320.0
6985	155.148	-	-	-	320.0

Table 72 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	22.782	-	-	-	320.0
6275	23.142	-	-	-	320.0
6395	22.860	-	-	-	320.0
6415	22.980	-	-	-	320.0
6435	23.298	-	-	-	320.0
6475	22.980	-	-	-	320.0
6515	23.190	-	-	-	320.0
6535	22.920	-	-	-	320.0
6695	23.310	-	-	-	320.0
6855	22.698	-	-	-	320.0
6875	23.166	-	-	-	320.0
6895	22.848	-	-	-	320.0
6995	22.758	-	-	-	320.0
7095	23.178	-	-	-	320.0

Table 73 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	19.068	-	-	-	320.0
6275	19.062	-	-	-	320.0
6395	19.068	-	-	-	320.0
6415	19.080	-	-	-	320.0
6435	19.062	-	-	-	320.0
6475	19.068	-	-	-	320.0
6515	19.062	-	-	-	320.0
6535	19.068	-	-	-	320.0
6695	19.062	-	-	-	320.0
6855	19.062	-	-	-	320.0
6875	19.056	-	-	-	320.0
6895	19.074	-	-	-	320.0
6995	19.068	-	-	-	320.0
7095	19.068	-	-	-	320.0

Table 74 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6125	44.688	-	-	-	320.0
6285	44.688	-	-	-	320.0
6405	45.012	-	-	-	320.0
6445	44.256	-	-	-	320.0
6485	45.000	-	-	-	320.0
6525	44.940	-	-	-	320.0
6565	44.712	-	-	-	320.0
6725	44.688	-	-	-	320.0
6845	44.448	-	-	-	320.0
6885	44.940	-	-	-	320.0
6925	44.832	-	-	-	320.0
7005	44.604	-	-	-	320.0
7085	44.580	-	-	-	320.0

Table 75 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6125	38.016	-	-	-	320.0
6285	38.016	-	-	-	320.0
6405	38.052	-	-	-	320.0
6445	38.004	-	-	-	320.0
6485	38.040	-	-	-	320.0
6525	38.028	-	-	-	320.0
6565	38.040	-	-	-	320.0
6725	38.040	-	-	-	320.0
6845	38.028	-	-	-	320.0
6885	38.028	-	-	-	320.0
6925	38.016	-	-	-	320.0
7005	38.016	-	-	-	320.0
7085	38.016	-	-	-	320.0

Table 76 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCC (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6145	82.456	-	-	-	320.0
6305	82.588	-	-	-	320.0
6385	82.830	-	-	-	320.0
6465	82.764	-	-	-	320.0
6545	82.874	-	-	-	320.0
6625	82.742	-	-	-	320.0
6705	82.566	-	-	-	320.0
6785	82.500	-	-	-	320.0
6865	82.764	-	-	-	320.0
6945	82.566	-	-	-	320.0
7025	82.830	-	-	-	320.0

Table 77 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6145	77.462	-	-	-	320.0
6305	77.462	-	-	-	320.0
6385	77.506	-	-	-	320.0
6465	77.462	-	-	-	320.0
6545	77.484	-	-	-	320.0
6625	77.484	-	-	-	320.0
6705	77.462	-	-	-	320.0
6785	77.440	-	-	-	320.0
6865	77.484	-	-	-	320.0
6945	77.440	-	-	-	320.0
7025	77.462	-	-	-	320.0

Table 78 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6185	164.724	-	-	-	320.0
6345	164.724	-	-	-	320.0
6505	165.228	-	-	-	320.0
6665	164.682	-	-	-	320.0
6825	164.514	-	-	-	320.0
6985	164.640	-	-	-	320.0

Table 79 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6185	156.324	-	-	-	320.0
6345	156.366	-	-	-	320.0
6505	156.492	-	-	-	320.0
6665	156.534	-	-	-	320.0
6825	156.408	-	-	-	320.0
6985	156.366	-	-	-	320.0

Table 80 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	21.834	-	-	320.0
5975	-	21.900	-	-	320.0
6195	-	21.828	-	-	320.0
6415	-	21.948	-	-	320.0
6435	-	21.780	-	-	320.0
6475	-	21.948	-	-	320.0
6515	-	21.996	-	-	320.0
6535	-	21.756	-	-	320.0
6695	-	21.744	-	-	320.0
6855	-	21.780	-	-	320.0
6875	-	21.672	-	-	320.0
6895	-	21.678	-	-	320.0
7015	-	21.612	-	-	320.0
7095	-	21.798	-	-	320.0
7115	-	19.932	-	-	320.0

Table 81 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	16.776	-	-	320.0
5975	-	16.776	-	-	320.0
6195	-	16.782	-	-	320.0
6415	-	16.788	-	-	320.0
6435	-	16.776	-	-	320.0
6475	-	16.776	-	-	320.0
6515	-	16.776	-	-	320.0
6535	-	16.776	-	-	320.0
6695	-	16.782	-	-	320.0
6855	-	16.782	-	-	320.0
6875	-	16.788	-	-	320.0
6895	-	16.782	-	-	320.0
7015	-	16.770	-	-	320.0
7095	-	16.782	-	-	320.0
7115	-	16.380	-	-	320.0

Table 82 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	-	43.812	-	-	320.0
6205	-	43.728	-	-	320.0
6405	-	44.220	-	-	320.0
6525	-	44.040	-	-	320.0
6565	-	43.584	-	-	320.0
6725	-	44.112	-	-	320.0
6845	-	43.944	-	-	320.0
6925	-	43.596	-	-	320.0
7005	-	43.944	-	-	320.0
7085	-	44.028	-	-	320.0

Table 83 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	-	36.696	-	-	320.0
6205	-	36.684	-	-	320.0
6405	-	36.708	-	-	320.0
6525	-	36.684	-	-	320.0
6565	-	36.708	-	-	320.0
6725	-	36.672	-	-	320.0
6845	-	36.708	-	-	320.0
6925	-	36.672	-	-	320.0
7005	-	36.696	-	-	320.0
7085	-	36.684	-	-	320.0

Table 84 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz 6.875-7.125 GHz	Band:	U-NII-6 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40 LPI	Duty Cycle (%):	-
Data Rate:	24 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6445	-	64.188	-	-	320.0
6485	-	62.832	-	-	320.0
6885	-	64.488	-	-	320.0

Table 85 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6445	-	37.332	-	-	320.0
6485	-	37.344	-	-	320.0
6885	-	37.356	-	-	320.0

Table 86 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	-	116.928	-	-	320.0
6225	-	113.376	-	-	320.0
6385	-	115.368	-	-	320.0
6545	-	113.880	-	-	320.0
6625	-	115.680	-	-	320.0
6705	-	116.256	-	-	320.0
6785	-	113.616	-	-	320.0
6865	-	114.408	-	-	320.0
7025	-	117.768	-	-	320.0

Table 87 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	-	77.448	-	-	320.0
6225	-	77.472	-	-	320.0
6385	-	77.568	-	-	320.0
6545	-	77.544	-	-	320.0
6625	-	77.544	-	-	320.0
6705	-	77.400	-	-	320.0
6785	-	77.448	-	-	320.0
6865	-	77.592	-	-	320.0
7025	-	77.424	-	-	320.0

Table 88 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz 6.875-7.125 GHz	Band:	U-NII-6 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80 LPI	Duty Cycle (%):	-
Data Rate:	24 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6465	-	116.256	-	-	320.0
6945	-	126.744	-	-	320.0

Table 89 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6465	-	76.992	-	-	320.0
6945	-	76.968	-	-	320.0

Table 90 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	-	163.968	-	-	320.0
6185	-	164.892	-	-	320.0
6345	-	164.178	-	-	320.0
6505	-	164.556	-	-	320.0
6665	-	164.472	-	-	320.0
6825	-	164.178	-	-	320.0
6985	-	164.724	-	-	320.0

Table 91 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	-	155.064	-	-	320.0
6185	-	155.064	-	-	320.0
6345	-	155.190	-	-	320.0
6505	-	155.106	-	-	320.0
6665	-	155.190	-	-	320.0
6825	-	155.106	-	-	320.0
6985	-	155.106	-	-	320.0

Table 92 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	22.944	-	-	320.0
6195	-	22.908	-	-	320.0
6415	-	22.884	-	-	320.0
6435	-	22.926	-	-	320.0
6475	-	23.076	-	-	320.0
6515	-	23.268	-	-	320.0
6535	-	23.088	-	-	320.0
6695	-	23.280	-	-	320.0
6855	-	23.112	-	-	320.0
6875	-	23.382	-	-	320.0
6895	-	22.938	-	-	320.0
6995	-	23.316	-	-	320.0
7095	-	23.508	-	-	320.0

Table 93 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	19.062	-	-	320.0
6195	-	19.050	-	-	320.0
6415	-	19.056	-	-	320.0
6435	-	19.074	-	-	320.0
6475	-	19.074	-	-	320.0
6515	-	19.074	-	-	320.0
6535	-	19.086	-	-	320.0
6695	-	19.092	-	-	320.0
6855	-	19.068	-	-	320.0
6875	-	19.086	-	-	320.0
6895	-	19.068	-	-	320.0
6995	-	19.068	-	-	320.0
7095	-	19.068	-	-	320.0

Table 94 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	-	44.448	-	-	320.0
6005	-	45.180	-	-	320.0
6205	-	44.640	-	-	320.0
6405	-	44.976	-	-	320.0
6445	-	44.508	-	-	320.0
6485	-	44.580	-	-	320.0
6525	-	44.712	-	-	320.0
6565	-	44.964	-	-	320.0
6725	-	45.048	-	-	320.0
6845	-	45.216	-	-	320.0
6885	-	45.108	-	-	320.0
6925	-	44.856	-	-	320.0
7005	-	44.412	-	-	320.0
7085	-	44.208	-	-	320.0

Table 95 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	-	38.028	-	-	320.0
6005	-	38.004	-	-	320.0
6205	-	38.016	-	-	320.0
6405	-	38.028	-	-	320.0
6445	-	38.016	-	-	320.0
6485	-	38.016	-	-	320.0
6525	-	38.016	-	-	320.0
6565	-	38.040	-	-	320.0
6725	-	38.016	-	-	320.0
6845	-	38.028	-	-	320.0
6885	-	38.028	-	-	320.0
6925	-	38.028	-	-	320.0
7005	-	38.028	-	-	320.0
7085	-	38.004	-	-	320.0

Table 96 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	-	82.874	-	-	320.0
6065	-	82.478	-	-	320.0
6225	-	82.390	-	-	320.0
6385	-	82.588	-	-	320.0
6465	-	82.720	-	-	320.0
6545	-	82.654	-	-	320.0
6625	-	82.566	-	-	320.0
6705	-	82.698	-	-	320.0
6785	-	82.786	-	-	320.0
6865	-	82.610	-	-	320.0
6945	-	82.544	-	-	320.0
7025	-	82.654	-	-	320.0

Table 97 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	-	77.462	-	-	320.0
6065	-	77.418	-	-	320.0
6225	-	77.440	-	-	320.0
6385	-	77.462	-	-	320.0
6465	-	77.440	-	-	320.0
6545	-	77.462	-	-	320.0
6625	-	77.462	-	-	320.0
6705	-	77.440	-	-	320.0
6785	-	77.418	-	-	320.0
6865	-	77.440	-	-	320.0
6945	-	77.418	-	-	320.0
7025	-	77.440	-	-	320.0

Table 98 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCC (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	-	164.724	-	-	320.0
6185	-	164.808	-	-	320.0
6345	-	164.430	-	-	320.0
6505	-	165.102	-	-	320.0
6665	-	164.892	-	-	320.0
6825	-	164.556	-	-	320.0
6985	-	164.556	-	-	320.0

Table 99 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	-	156.282	-	-	320.0
6185	-	156.282	-	-	320.0
6345	-	156.366	-	-	320.0
6505	-	156.324	-	-	320.0
6665	-	156.450	-	-	320.0
6825	-	156.324	-	-	320.0
6985	-	156.324	-	-	320.0

Table 100 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	19.848	-	-	320.0
6195	-	21.978	-	-	320.0
6415	-	22.026	-	-	320.0
6535	-	22.074	-	-	320.0
6695	-	21.564	-	-	320.0
6855	-	22.146	-	-	320.0

Table 101 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	16.356	-	-	320.0
6195	-	16.764	-	-	320.0
6415	-	16.764	-	-	320.0
6535	-	16.764	-	-	320.0
6695	-	16.776	-	-	320.0
6855	-	16.758	-	-	320.0

Table 102 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	-	45.000	-	-	320.0
6205	-	51.180	-	-	320.0
6405	-	54.432	-	-	320.0
6565	-	53.736	-	-	320.0
6725	-	59.724	-	-	320.0
6845	-	64.140	-	-	320.0

Table 103 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	-	36.340	-	-	320.0
6205	-	36.804	-	-	320.0
6405	-	36.984	-	-	320.0
6565	-	36.828	-	-	320.0
6725	-	36.972	-	-	320.0
6845	-	37.164	-	-	320.0

Table 104 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	-	95.744	-	-	320.0
6225	-	131.508	-	-	320.0
6385	-	139.906	-	-	320.0
6625	-	132.964	-	-	320.0
6705	-	133.718	-	-	320.0
6785	-	151.814	-	-	320.0

Table 105 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	-	75.702	-	-	320.0
6225	-	85.436	-	-	320.0
6385	-	87.802	-	-	320.0
6625	-	86.216	-	-	320.0
6705	-	86.736	-	-	320.0
6785	-	87.464	-	-	320.0

Table 106 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	-	164.808	-	-	320.0
6185	-	165.732	-	-	320.0
6345	-	238.980	-	-	320.0
6665	-	238.686	-	-	320.0

Table 107 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	-	154.476	-	-	320.0
6185	-	154.602	-	-	320.0
6345	-	154.980	-	-	320.0
6665	-	154.938	-	-	320.0

Table 108 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	21.216	-	-	320.0
6195	-	22.848	-	-	320.0
6415	-	22.842	-	-	320.0
6535	-	22.890	-	-	320.0
6695	-	23.106	-	-	320.0
6855	-	22.920	-	-	320.0

Table 109 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	18.798	-	-	320.0
6195	-	19.068	-	-	320.0
6415	-	19.068	-	-	320.0
6535	-	19.074	-	-	320.0
6695	-	19.056	-	-	320.0
6855	-	19.068	-	-	320.0

Table 110 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	-	42.636	-	-	320.0
6205	-	44.460	-	-	320.0
6405	-	44.760	-	-	320.0
6565	-	44.928	-	-	320.0
6725	-	45.060	-	-	320.0
6845	-	44.580	-	-	320.0

Table 111 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	-	37.632	-	-	320.0
6205	-	37.992	-	-	320.0
6405	-	38.004	-	-	320.0
6565	-	38.016	-	-	320.0
6725	-	38.016	-	-	320.0
6845	-	38.040	-	-	320.0

Table 112 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	-	81.598	-	-	320.0
6225	-	82.786	-	-	320.0
6385	-	82.764	-	-	320.0
6625	-	82.588	-	-	320.0
6705	-	82.500	-	-	320.0
6785	-	82.610	-	-	320.0

Table 113 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	-	76.714	-	-	320.0
6225	-	77.440	-	-	320.0
6385	-	77.462	-	-	320.0
6625	-	77.462	-	-	320.0
6705	-	77.462	-	-	320.0
6785	-	77.440	-	-	320.0

Table 114 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	-	164.052	-	-	320.0
6185	-	164.220	-	-	320.0
6345	-	164.220	-	-	320.0
6665	-	164.472	-	-	320.0

Table 115 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	-	155.484	-	-	320.0
6185	-	155.568	-	-	320.0
6345	-	155.820	-	-	320.0
6665	-	155.736	-	-	320.0

Table 116 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6435	-	21.924	-	-	320.0
6475	-	21.894	-	-	320.0
6515	-	22.134	-	-	320.0

Table 117 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6435	-	16.764	-	-	320.0
6475	-	16.776	-	-	320.0
6515	-	16.764	-	-	320.0

Table 118 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6445	-	49.932	-	-	320.0
6485	-	49.788	-	-	320.0
6525	-	51.720	-	-	320.0

Table 119 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6445	-	36.780	-	-	320.0
6485	-	36.792	-	-	320.0
6525	-	36.804	-	-	320.0

Table 120 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-6 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6465	-	132.028	-	-	320.0
6545	-	133.094	-	-	320.0

Table 121 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6465	-	85.150	-	-	320.0
6545	-	86.060	-	-	320.0

Table 122 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6505	-	166.824	-	-	320.0

Table 123 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6505	-	154.686	-	-	320.0

Table 124 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6435	-	22.836	-	-	320.0
6475	-	22.854	-	-	320.0
6515	-	22.980	-	-	320.0

Table 125 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6435	-	19.056	-	-	320.0
6475	-	19.056	-	-	320.0
6515	-	19.068	-	-	320.0

Table 126 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6445	-	44.616	-	-	320.0
6485	-	45.324	-	-	320.0
6525	-	44.652	-	-	320.0

Table 127 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6445	-	37.992	-	-	320.0
6485	-	38.016	-	-	320.0
6525	-	38.016	-	-	320.0

Table 128 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-6 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6465	-	82.654	-	-	320.0
6545	-	82.808	-	-	320.0

Table 129 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6465	-	77.396	-	-	320.0
6545	-	77.462	-	-	320.0

Table 130 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6505	-	163.926	-	-	320.0

Table 131 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6505	-	155.568	-	-	320.0

Table 132 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	-	21.720	-	-	320.0
6275	-	21.648	-	-	320.0
6415	-	21.900	-	-	320.0
6435	-	21.960	-	-	320.0
6475	-	21.960	-	-	320.0
6515	-	21.792	-	-	320.0
6535	-	21.894	-	-	320.0
6695	-	21.480	-	-	320.0
6855	-	21.768	-	-	320.0
6875	-	21.810	-	-	320.0
6895	-	21.864	-	-	320.0
7015	-	21.936	-	-	320.0
7095	-	21.774	-	-	320.0
7115	-	19.680	-	-	320.0

Table 133 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	-	16.764	-	-	320.0
6275	-	16.764	-	-	320.0
6415	-	16.776	-	-	320.0
6435	-	16.770	-	-	320.0
6475	-	16.764	-	-	320.0
6515	-	16.776	-	-	320.0
6535	-	16.770	-	-	320.0
6695	-	16.764	-	-	320.0
6855	-	16.764	-	-	320.0
6875	-	16.770	-	-	320.0
6895	-	16.764	-	-	320.0
7015	-	16.752	-	-	320.0
7095	-	16.758	-	-	320.0
7115	-	16.368	-	-	320.0

Table 134 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6125	-	43.704	-	-	320.0
6285	-	44.028	-	-	320.0
6405	-	43.848	-	-	320.0
6525	-	44.100	-	-	320.0
6565	-	43.800	-	-	320.0
6725	-	44.472	-	-	320.0
6845	-	43.992	-	-	320.0
6925	-	43.824	-	-	320.0
7005	-	43.932	-	-	320.0
7085	-	44.244	-	-	320.0

Table 135 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6125	-	36.720	-	-	320.0
6285	-	36.708	-	-	320.0
6405	-	36.720	-	-	320.0
6525	-	36.720	-	-	320.0
6565	-	36.744	-	-	320.0
6725	-	36.708	-	-	320.0
6845	-	36.744	-	-	320.0
6925	-	36.708	-	-	320.0
7005	-	36.708	-	-	320.0
7085	-	36.720	-	-	320.0

Table 136 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz 6.875-7.125 GHz	Band:	U-NII-6 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40 VLP	Duty Cycle (%):	-
Data Rate:	24 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6445	-	63.492	-	-	320.0
6485	-	67.984	-	-	320.0
6885	-	63.756	-	-	320.0

Table 137 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6445	-	37.356	-	-	320.0
6485	-	39.494	-	-	320.0
6885	-	37.500	-	-	320.0

Table 138 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6145	-	118.608	-	-	320.0
6305	-	114.864	-	-	320.0
6385	-	117.192	-	-	320.0
6545	-	116.090	-	-	320.0
6625	-	115.778	-	-	320.0
6705	-	116.640	-	-	320.0
6785	-	115.056	-	-	320.0
6865	-	115.960	-	-	320.0
7025	-	115.992	-	-	320.0

Table 139 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6145	-	77.472	-	-	320.0
6305	-	77.592	-	-	320.0
6385	-	77.712	-	-	320.0
6545	-	77.818	-	-	320.0
6625	-	77.740	-	-	320.0
6705	-	77.592	-	-	320.0
6785	-	77.520	-	-	320.0
6865	-	77.844	-	-	320.0
7025	-	77.592	-	-	320.0

Table 140 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz 6.875-7.125 GHz	Band:	U-NII-6 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80 VLP	Duty Cycle (%):	-
Data Rate:	24 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6465	-	116.232	-	-	320.0
6945	-	116.424	-	-	320.0

Table 141 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6465	-	77.064	-	-	320.0
6945	-	76.992	-	-	320.0

Table 142 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6185	-	164.724	-	-	320.0
6345	-	165.102	-	-	320.0
6505	-	164.850	-	-	320.0
6665	-	164.682	-	-	320.0
6825	-	164.640	-	-	320.0
6985	-	164.892	-	-	320.0

Table 143 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6185	-	155.106	-	-	320.0
6345	-	155.190	-	-	320.0
6505	-	155.232	-	-	320.0
6665	-	155.190	-	-	320.0
6825	-	155.232	-	-	320.0
6985	-	155.148	-	-	320.0

Table 144 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCC (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	-	22.956	-	-	320.0
6275	-	23.220	-	-	320.0
6415	-	22.980	-	-	320.0
6435	-	22.878	-	-	320.0
6475	-	23.424	-	-	320.0
6515	-	22.848	-	-	320.0
6535	-	22.866	-	-	320.0
6695	-	23.304	-	-	320.0
6855	-	23.202	-	-	320.0
6875	-	23.322	-	-	320.0
6895	-	23.094	-	-	320.0
6995	-	23.082	-	-	320.0
7095	-	23.280	-	-	320.0

Table 145 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	-	19.062	-	-	320.0
6275	-	19.068	-	-	320.0
6415	-	19.062	-	-	320.0
6435	-	19.062	-	-	320.0
6475	-	19.068	-	-	320.0
6515	-	19.074	-	-	320.0
6535	-	19.068	-	-	320.0
6695	-	19.062	-	-	320.0
6855	-	19.074	-	-	320.0
6875	-	19.068	-	-	320.0
6895	-	19.062	-	-	320.0
6995	-	19.056	-	-	320.0
7095	-	19.056	-	-	320.0

Table 146 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6125	-	44.508	-	-	320.0
6285	-	44.688	-	-	320.0
6405	-	45.528	-	-	320.0
6445	-	44.916	-	-	320.0
6485	-	44.964	-	-	320.0
6525	-	44.988	-	-	320.0
6565	-	45.156	-	-	320.0
6725	-	44.856	-	-	320.0
6845	-	44.532	-	-	320.0
6885	-	44.652	-	-	320.0
6925	-	44.628	-	-	320.0
7005	-	44.508	-	-	320.0
7085	-	44.736	-	-	320.0

Table 147 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6125	-	38.028	-	-	320.0
6285	-	38.040	-	-	320.0
6405	-	38.052	-	-	320.0
6445	-	38.016	-	-	320.0
6485	-	38.040	-	-	320.0
6525	-	38.040	-	-	320.0
6565	-	38.064	-	-	320.0
6725	-	38.040	-	-	320.0
6845	-	38.064	-	-	320.0
6885	-	38.052	-	-	320.0
6925	-	38.016	-	-	320.0
7005	-	38.028	-	-	320.0
7085	-	38.016	-	-	320.0

Table 148 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6145	-	82.698	-	-	320.0
6305	-	82.610	-	-	320.0
6385	-	82.500	-	-	320.0
6465	-	82.698	-	-	320.0
6545	-	82.852	-	-	320.0
6625	-	82.434	-	-	320.0
6705	-	82.720	-	-	320.0
6785	-	82.522	-	-	320.0
6865	-	82.786	-	-	320.0
6945	-	82.654	-	-	320.0
7025	-	82.742	-	-	320.0

Table 149 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6145	-	77.462	-	-	320.0
6305	-	77.462	-	-	320.0
6385	-	77.484	-	-	320.0
6465	-	77.462	-	-	320.0
6545	-	77.484	-	-	320.0
6625	-	77.484	-	-	320.0
6705	-	77.484	-	-	320.0
6785	-	77.462	-	-	320.0
6865	-	77.506	-	-	320.0
6945	-	77.440	-	-	320.0
7025	-	77.484	-	-	320.0

Table 150 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6185	-	164.808	-	-	320.0
6345	-	164.724	-	-	320.0
6505	-	164.682	-	-	320.0
6665	-	164.892	-	-	320.0
6825	-	164.346	-	-	320.0
6985	-	164.976	-	-	320.0

Table 151 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6185	-	156.324	-	-	320.0
6345	-	156.408	-	-	320.0
6505	-	156.450	-	-	320.0
6665	-	156.366	-	-	320.0
6825	-	156.450	-	-	320.0
6985	-	156.366	-	-	320.0

Table 152 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	21.792	22.470	-	-	320.0
6195	21.594	22.230	-	-	320.0
6415	21.906	21.954	-	-	320.0
6435	21.582	22.254	-	-	320.0
6475	21.714	22.338	-	-	320.0
6515	21.834	22.260	-	-	320.0
6535	21.726	22.386	-	-	320.0
6695	21.948	22.266	-	-	320.0
6855	21.708	22.122	-	-	320.0
6875	22.002	22.200	-	-	320.0
6895	21.792	21.978	-	-	320.0
7015	22.038	21.894	-	-	320.0
7095	21.804	22.422	-	-	320.0
7115	19.998	20.436	-	-	320.0

Table 153 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	16.764	16.782	-	-	320.0
6195	16.758	16.782	-	-	320.0
6415	16.764	16.794	-	-	320.0
6435	16.764	16.788	-	-	320.0
6475	16.764	16.788	-	-	320.0
6515	16.752	16.782	-	-	320.0
6535	16.770	16.788	-	-	320.0
6695	16.770	16.800	-	-	320.0
6855	16.758	16.788	-	-	320.0
6875	16.764	16.806	-	-	320.0
6895	16.770	16.794	-	-	320.0
7015	16.770	16.794	-	-	320.0
7095	16.758	16.800	-	-	320.0
7115	16.368	16.380	-	-	320.0

Table 154 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	43.680	43.704	-	-	320.0
6205	43.524	44.280	-	-	320.0
6365	43.308	43.896	-	-	320.0
6405	43.812	44.484	-	-	320.0
6445	43.488	43.740	-	-	320.0
6485	44.460	43.836	-	-	320.0
6525	43.728	43.776	-	-	320.0
6565	44.496	43.584	-	-	320.0
6725	43.920	44.364	-	-	320.0
6845	44.124	44.136	-	-	320.0
6925	43.860	44.700	-	-	320.0
7005	44.508	44.064	-	-	320.0
7085	44.364	44.016	-	-	320.0

Table 155 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	36.660	36.696	-	-	320.0
6205	36.660	36.696	-	-	320.0
6365	36.648	36.696	-	-	320.0
6405	36.648	36.696	-	-	320.0
6445	36.660	36.732	-	-	320.0
6485	36.684	36.708	-	-	320.0
6525	36.648	36.672	-	-	320.0
6565	36.660	36.708	-	-	320.0
6725	36.672	36.696	-	-	320.0
6845	36.660	36.708	-	-	320.0
6925	36.708	36.768	-	-	320.0
7005	36.684	36.708	-	-	320.0
7085	36.720	36.756	-	-	320.0

Table 156 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40 LPI	Duty Cycle (%):	-
Data Rate:	24 Mbps	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6885	63.816	64.524	-	-	320.0

Table 157 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6885	37.332	37.344	-	-	320.0

Table 158 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	130.176	113.496	-	-	320.0
6225	114.912	117.744	-	-	320.0
6305	118.848	117.096	-	-	320.0
6385	117.728	115.128	-	-	320.0
6465	115.362	115.824	-	-	320.0
6545	122.088	119.340	-	-	320.0
6625	117.806	115.830	-	-	320.0
6705	116.232	117.720	-	-	320.0
6785	114.648	115.968	-	-	320.0
6865	125.832	128.184	-	-	320.0
6945	117.168	115.656	-	-	320.0
7025	114.816	115.560	-	-	320.0

Table 159 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	77.496	77.664	-	-	320.0
6225	77.664	77.616	-	-	320.0
6305	77.544	77.496	-	-	320.0
6385	78.156	77.640	-	-	320.0
6465	77.532	77.472	-	-	320.0
6545	77.640	77.714	-	-	320.0
6625	77.818	77.740	-	-	320.0
6705	77.544	77.640	-	-	320.0
6785	77.496	77.712	-	-	320.0
6865	77.736	78.120	-	-	320.0
6945	77.640	77.592	-	-	320.0
7025	77.496	77.832	-	-	320.0

Table 160 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	165.354	164.640	-	-	320.0
6185	164.724	164.346	-	-	320.0
6345	164.850	164.976	-	-	320.0
6505	165.522	164.808	-	-	320.0
6665	165.606	164.640	-	-	320.0
6825	165.018	166.530	-	-	320.0
6985	164.010	164.766	-	-	320.0

Table 161 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	155.064	155.106	-	-	320.0
6185	155.148	155.106	-	-	320.0
6345	155.232	155.232	-	-	320.0
6505	155.232	155.232	-	-	320.0
6665	155.316	155.316	-	-	320.0
6825	155.274	155.274	-	-	320.0
6985	155.190	155.190	-	-	320.0

Table 162 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	23.052	23.028	-	-	320.0
6195	22.950	23.202	-	-	320.0
6415	23.334	22.770	-	-	320.0
6435	23.022	23.124	-	-	320.0
6475	23.046	23.244	-	-	320.0
6515	23.214	22.992	-	-	320.0
6535	22.848	23.166	-	-	320.0
6695	22.446	22.674	-	-	320.0
6855	23.154	22.902	-	-	320.0
6875	22.716	22.908	-	-	320.0
6895	22.662	22.992	-	-	320.0
6995	23.052	23.268	-	-	320.0
7095	22.998	23.184	-	-	320.0

Table 163 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	19.062	19.056	-	-	320.0
6195	19.056	19.050	-	-	320.0
6415	19.080	19.074	-	-	320.0
6435	19.068	19.074	-	-	320.0
6475	19.068	19.074	-	-	320.0
6515	19.056	19.080	-	-	320.0
6535	19.068	19.062	-	-	320.0
6695	19.062	19.056	-	-	320.0
6855	19.050	19.056	-	-	320.0
6875	19.062	19.062	-	-	320.0
6895	19.074	19.062	-	-	320.0
6995	19.074	19.056	-	-	320.0
7095	19.062	19.062	-	-	320.0

Table 164 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	44.532	44.376	-	-	320.0
6205	44.556	44.484	-	-	320.0
6405	44.232	44.988	-	-	320.0
6445	45.036	44.916	-	-	320.0
6485	44.448	45.204	-	-	320.0
6525	44.052	44.748	-	-	320.0
6565	44.424	44.400	-	-	320.0
6725	44.880	44.688	-	-	320.0
6845	44.388	44.568	-	-	320.0
6885	44.628	43.968	-	-	320.0
6925	45.432	44.280	-	-	320.0
7005	44.664	45.168	-	-	320.0
7085	45.216	44.832	-	-	320.0

Table 165 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	37.992	38.004	-	-	320.0
6205	38.016	38.004	-	-	320.0
6405	38.052	38.040	-	-	320.0
6445	38.040	38.040	-	-	320.0
6485	38.064	38.028	-	-	320.0
6525	38.016	38.016	-	-	320.0
6565	38.004	38.016	-	-	320.0
6725	37.992	38.016	-	-	320.0
6845	38.004	38.016	-	-	320.0
6885	38.004	38.016	-	-	320.0
6925	38.028	38.028	-	-	320.0
7005	38.040	38.040	-	-	320.0
7085	38.064	38.040	-	-	320.0

Table 166 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	82.720	82.588	-	-	320.0
6225	82.588	82.742	-	-	320.0
6305	82.720	82.764	-	-	320.0
6385	82.654	82.368	-	-	320.0
6465	82.896	82.830	-	-	320.0
6545	82.654	82.786	-	-	320.0
6625	82.896	82.852	-	-	320.0
6705	82.742	82.808	-	-	320.0
6785	82.830	82.632	-	-	320.0
6865	82.764	82.808	-	-	320.0
6945	82.456	82.544	-	-	320.0
7025	82.698	82.698	-	-	320.0

Table 167 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	77.484	77.484	-	-	320.0
6225	77.506	77.484	-	-	320.0
6305	77.462	77.462	-	-	320.0
6385	77.528	77.484	-	-	320.0
6465	77.462	77.484	-	-	320.0
6545	77.528	77.484	-	-	320.0
6625	77.528	77.506	-	-	320.0
6705	77.506	77.506	-	-	320.0
6785	77.462	77.484	-	-	320.0
6865	77.506	77.528	-	-	320.0
6945	77.462	77.462	-	-	320.0
7025	77.462	77.506	-	-	320.0

Table 168 - 99% Bandwidth Results