

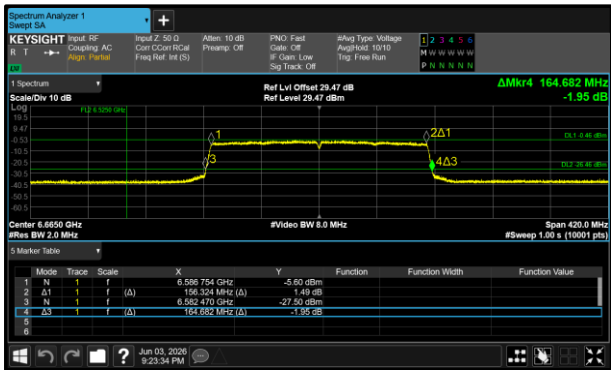


Figure 335 - 802.11ax HE160 SU VLP Minimum
99% OBW

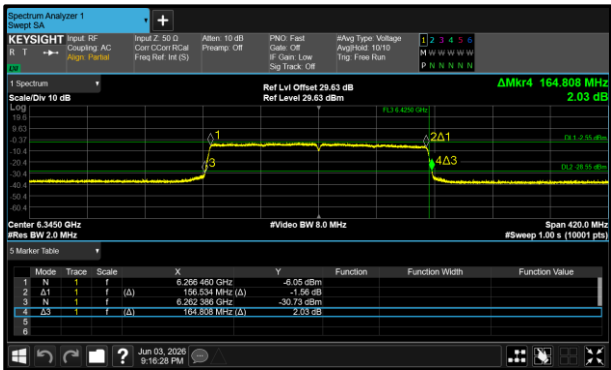


Figure 336 - 802.11ax HE160 SU VLP Maximum
99% OBW



Protocol	26 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE20 SU LPI	22.650	23.502
802.11ax HE40 SU LPI	44.280	45.336
802.11ax HE80 SU LPI	82.434	82.918
802.11ax HE160 SU LPI	164.472	165.018
802.11ax HE20 SU SP	21.252	23.316
802.11ax HE40 SU SP	42.288	45.360
802.11ax HE80 SU SP	81.818	82.874
802.11ax HE160 SU SP	163.716	164.388
802.11ax HE20 SU VLP	22.584	23.310
802.11ax HE40 SU VLP	44.208	45.432
802.11ax HE80 SU VLP	82.390	82.918
802.11ax HE160 SU VLP	164.724	166.194

Table 17 - 26 dB Bandwidth Summary Results - TxBF

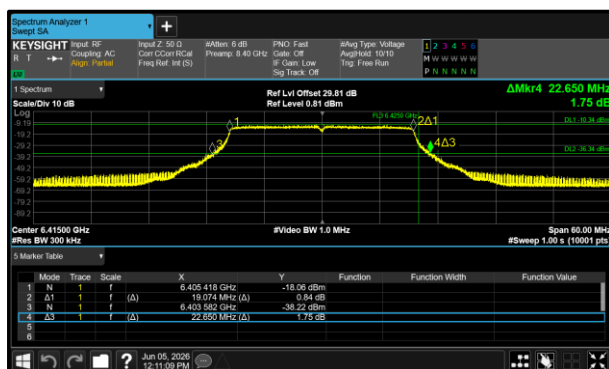


Figure 337 - 802.11ax HE20 SU LPI Minimum 26 dB EBW

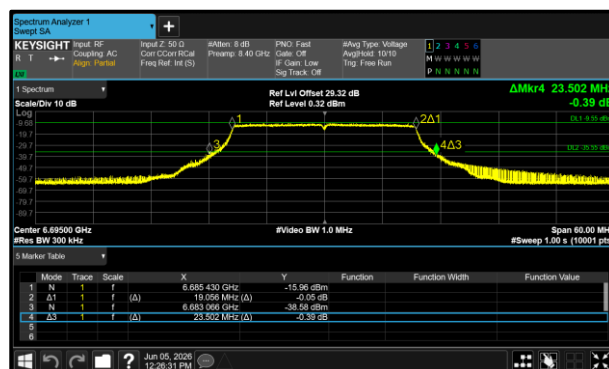


Figure 338 - 802.11ax HE20 SU LPI Maximum 26 dB EBW

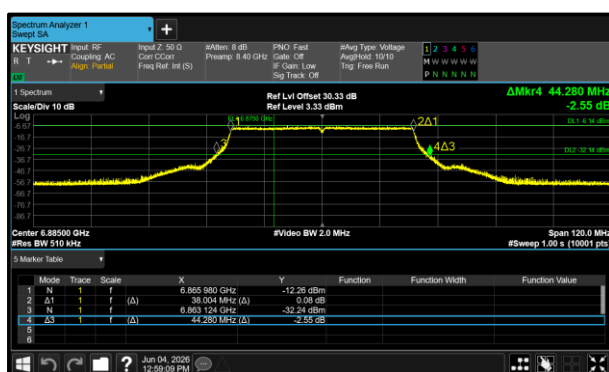


Figure 339 - 802.11ax HE40 SU LPI Minimum 26 dB EBW

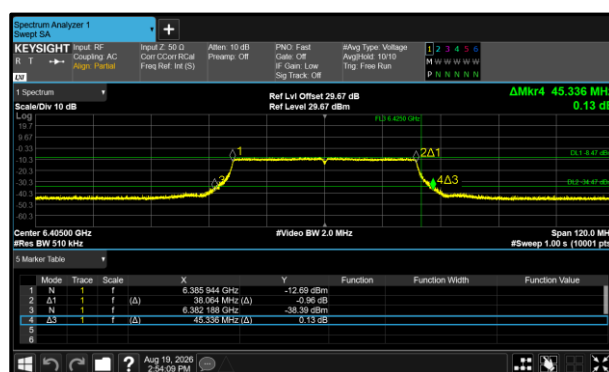


Figure 340 - 802.11ax HE40 SU LPI Maximum 26 dB EBW

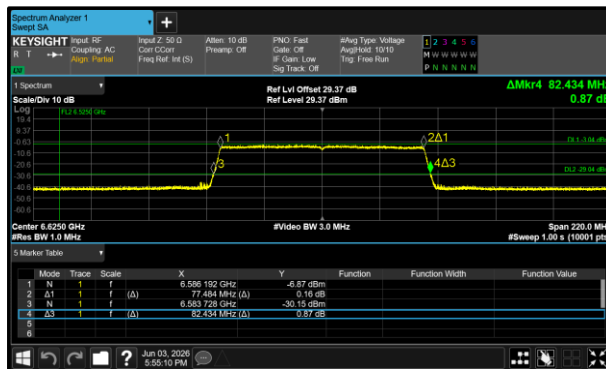


Figure 341 - 802.11ax HE80 SU LPI Minimum 26 dB EBW

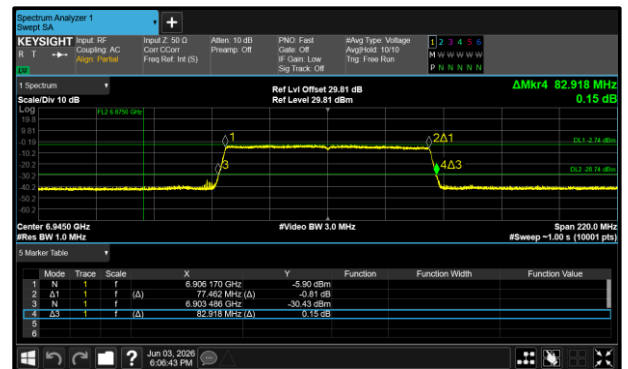


Figure 342 - 802.11ax HE80 SU LPI Maximum 26 dB EBW

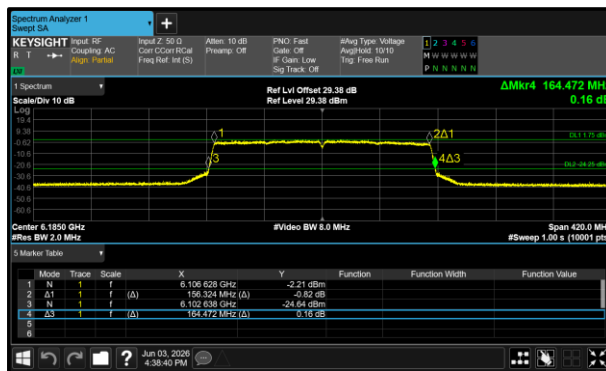


Figure 343 - 802.11ax HE160 SU LPI Minimum 26 dB EBW

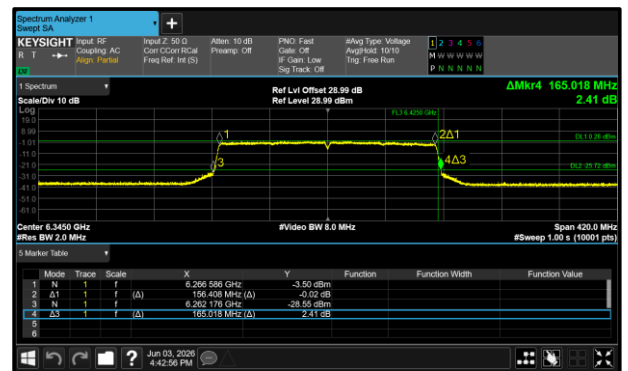


Figure 344 - 802.11ax HE160 SU LPI Maximum 26 dB EBW

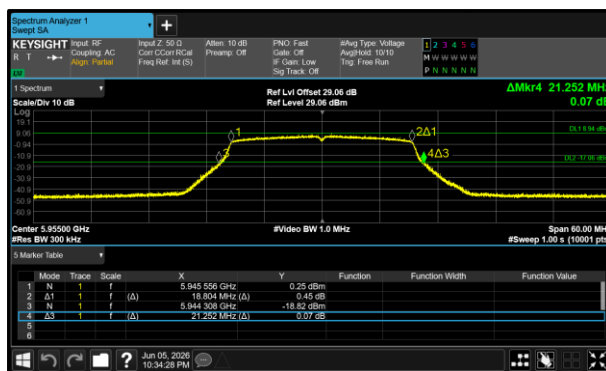


Figure 345 - 802.11ax HE20 SU SP Minimum 26 dB EBW

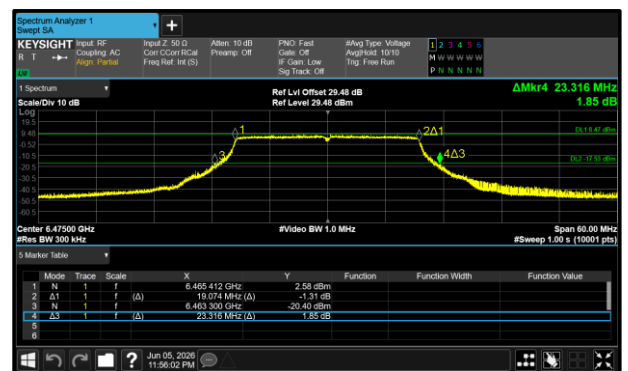
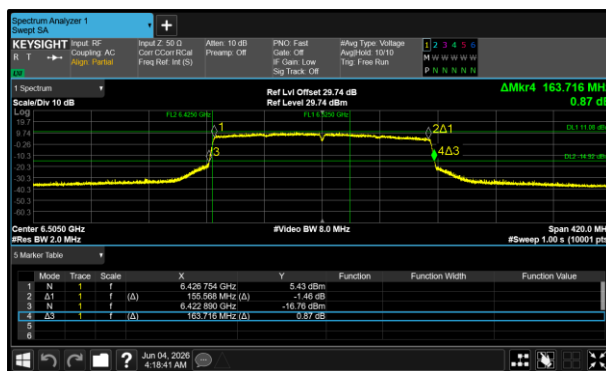
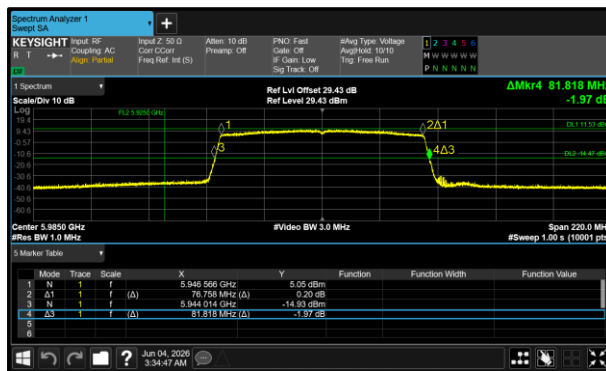
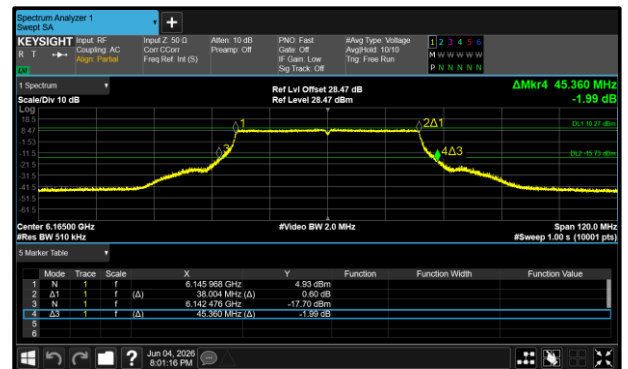
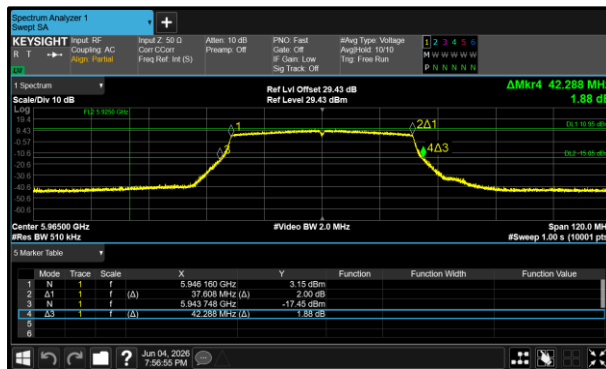


Figure 346 - 802.11ax HE20 SU SP Maximum 26 dB EBW



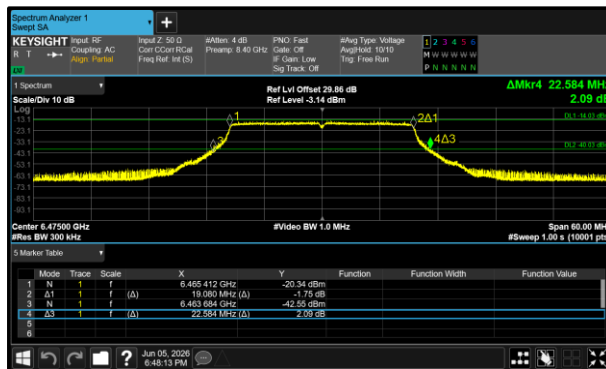


Figure 353 - 802.11ax HE20 SU VLP Minimum 26 dB EBW

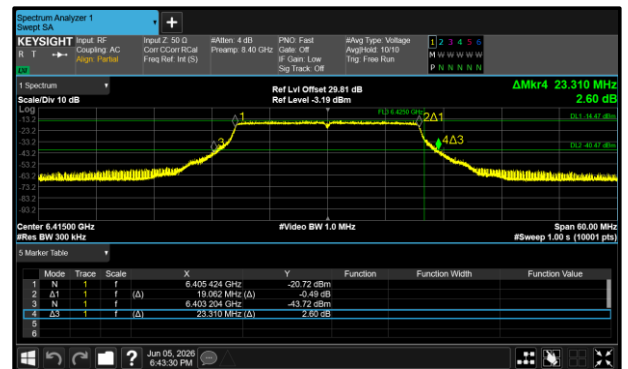


Figure 354 - 802.11ax HE20 SU VLP Maximum 26 dB EBW

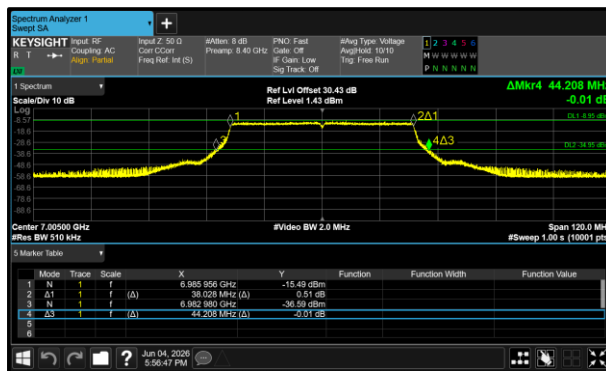


Figure 355 - 802.11ax HE40 SU VLP Minimum 26 dB EBW

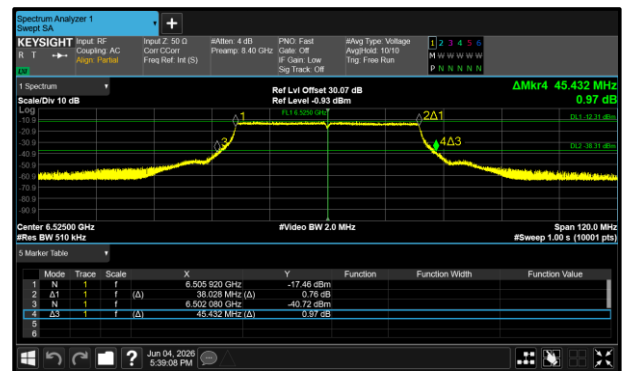


Figure 356 - 802.11ax HE40 SU VLP Maximum 26 dB EBW

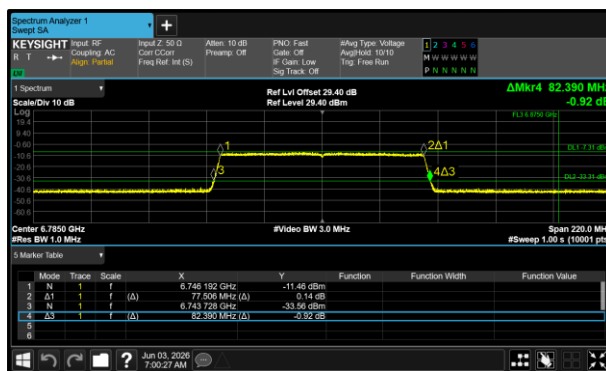


Figure 357 - 802.11ax HE80 SU VLP Minimum 26 dB EBW

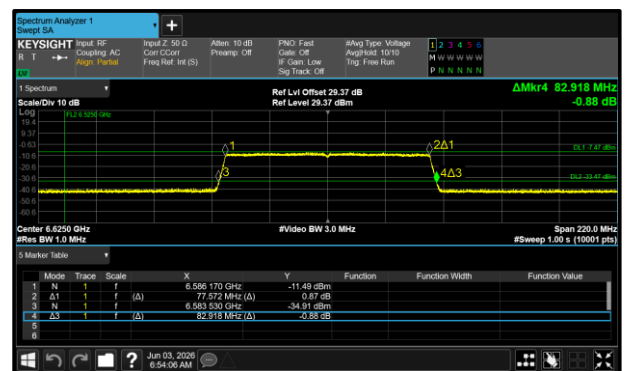


Figure 358 - 802.11ax HE80 SU VLP Maximum 26 dB EBW

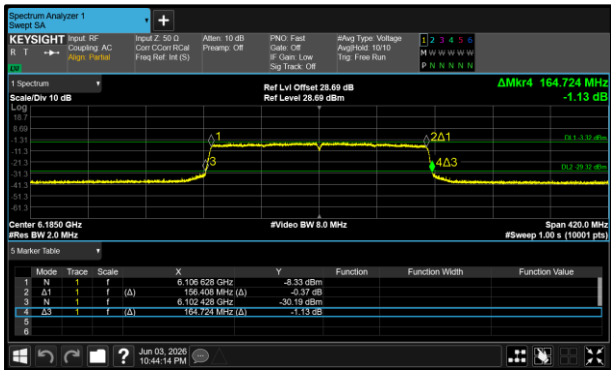


Figure 359 - 802.11ax HE160 SU VLP Minimum
26 dB EBW

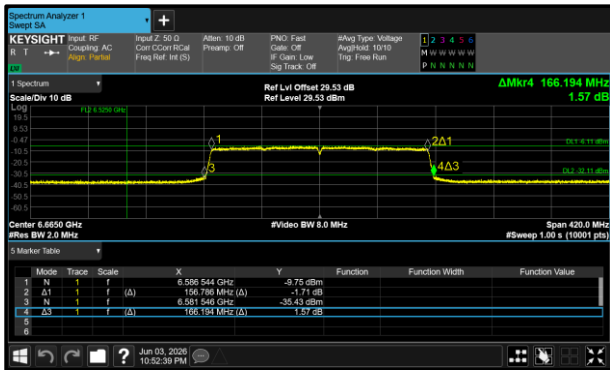
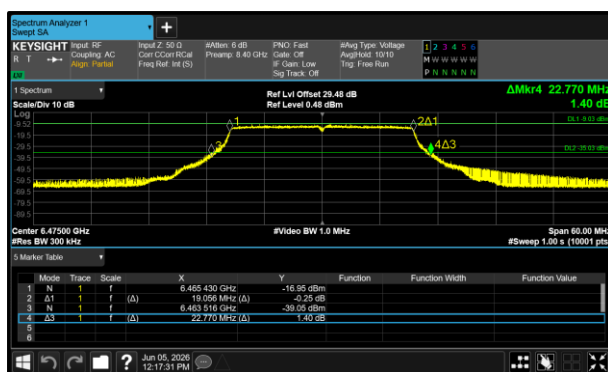
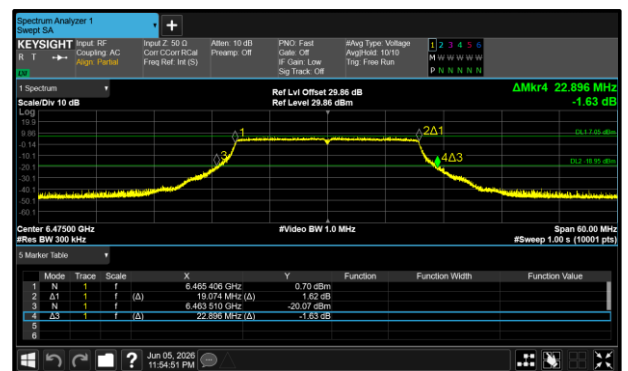
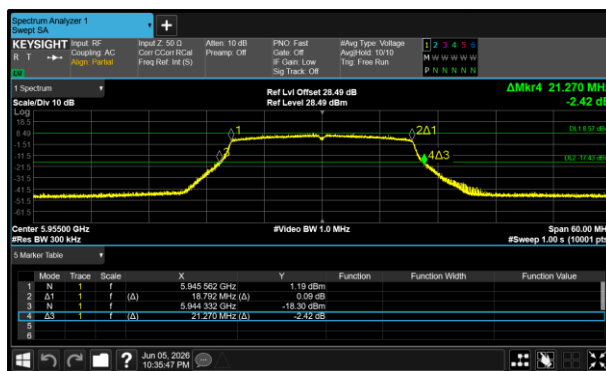
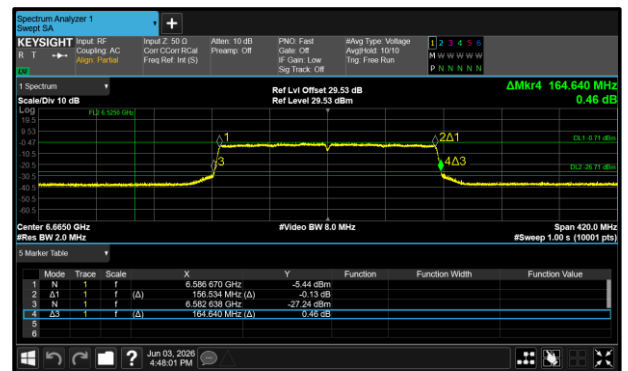
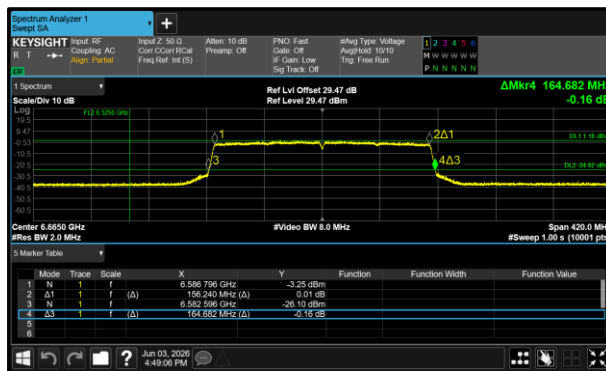
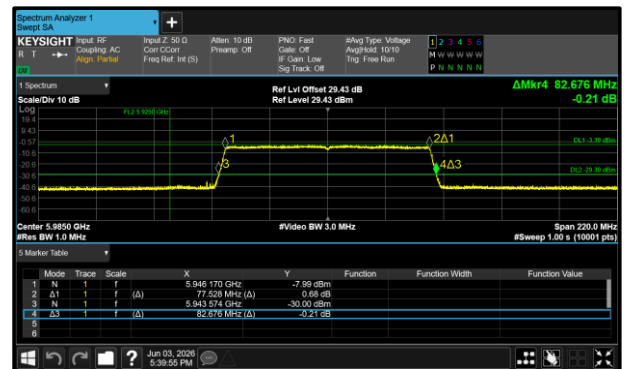
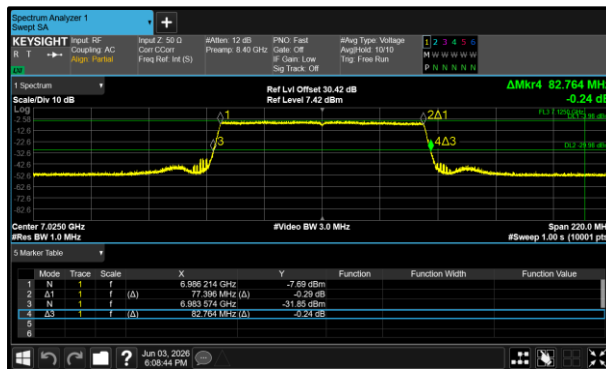


Figure 360 - 802.11ax HE160 SU VLP Maximum
26 dB EBW

Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE20 SU LPI	19.056	19.080
802.11ax HE40 SU LPI	37.992	38.064
802.11ax HE80 SU LPI	77.396	77.528
802.11ax HE160 SU LPI	156.240	156.534
802.11ax HE20 SU SP	18.792	19.074
802.11ax HE40 SU SP	37.608	38.028
802.11ax HE80 SU SP	76.692	77.528
802.11ax HE160 SU SP	155.400	155.736
802.11ax HE20 SU VLP	19.044	19.080
802.11ax HE40 SU VLP	37.980	38.028
802.11ax HE80 SU VLP	77.418	77.572
802.11ax HE160 SU VLP	156.366	156.786

Table 18 - 99% Bandwidth Summary Results - TxBF





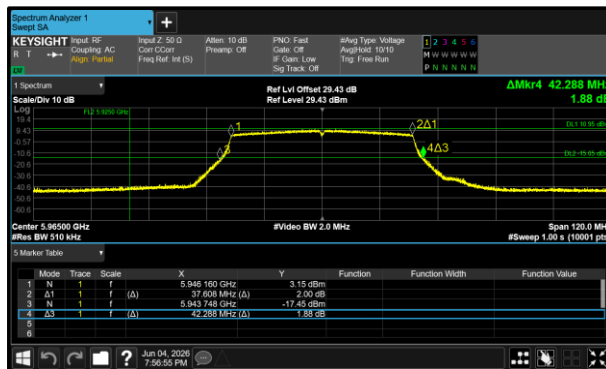


Figure 371 - 802.11ax HE40 SU SP Minimum 99% OBW

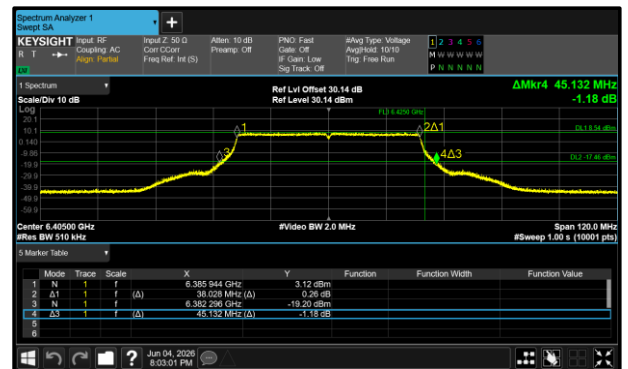


Figure 372 - 802.11ax HE40 SU SP Maximum 99% OBW

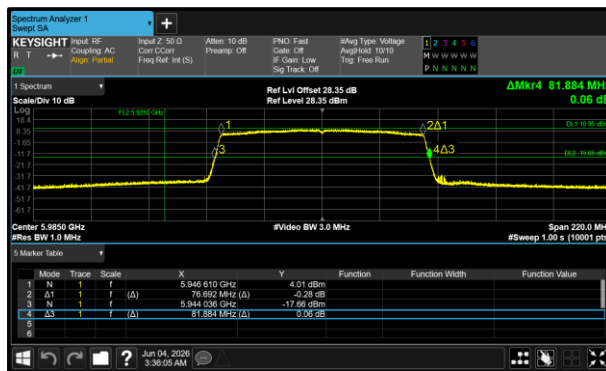


Figure 373 - 802.11ax HE80 SU SP Minimum 99% OBW

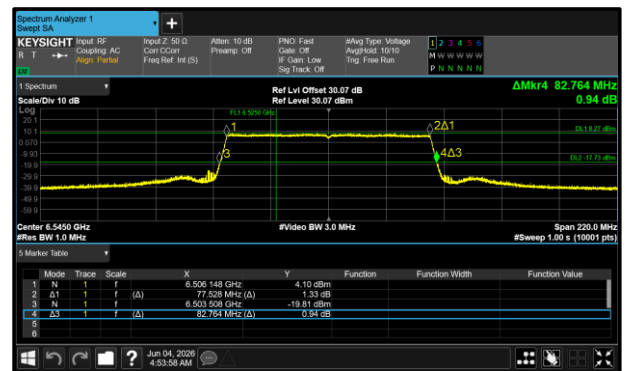


Figure 374 - 802.11ax HE80 SU SP Maximum 99% OBW

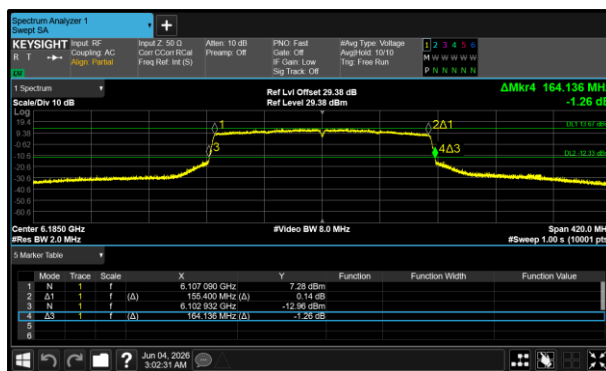


Figure 375 - 802.11ax HE160 SU SP Minimum 99% OBW



Figure 376 - 802.11ax HE160 SU SP Maximum 99% OBW

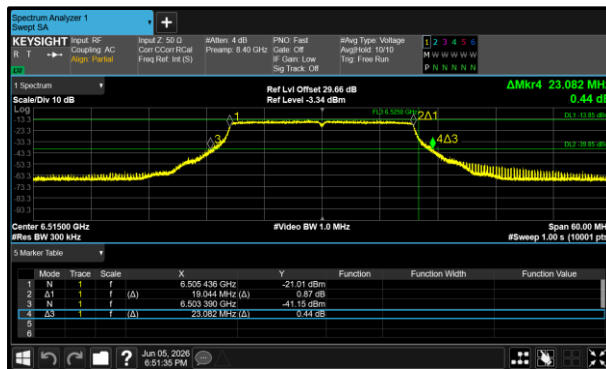


Figure 377 - 802.11ax HE20 SU VLP Minimum
99% OBW

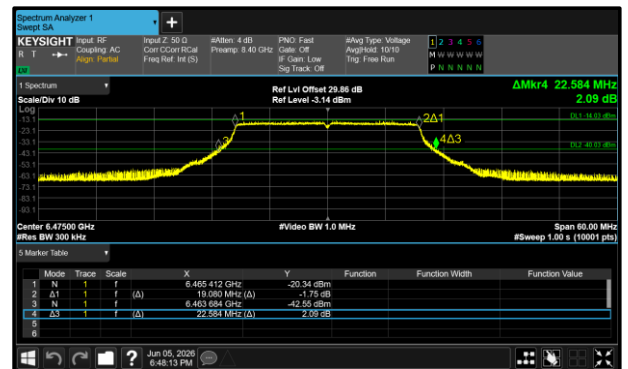


Figure 378 - 802.11ax HE20 SU VLP Maximum
99% OBW

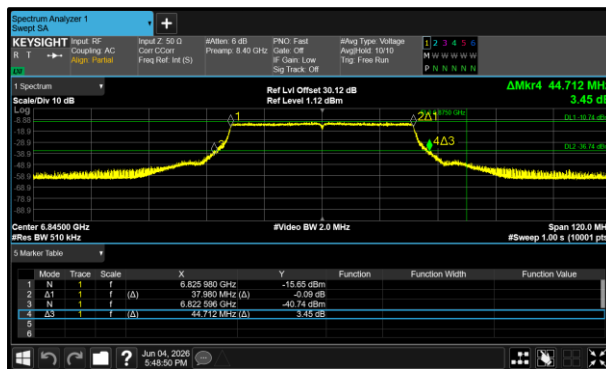


Figure 379 - 802.11ax HE40 SU VLP Minimum
99% OBW

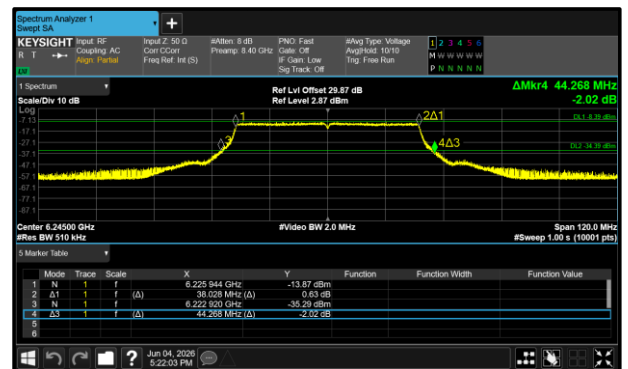


Figure 380 - 802.11ax HE40 SU VLP Maximum
99% OBW

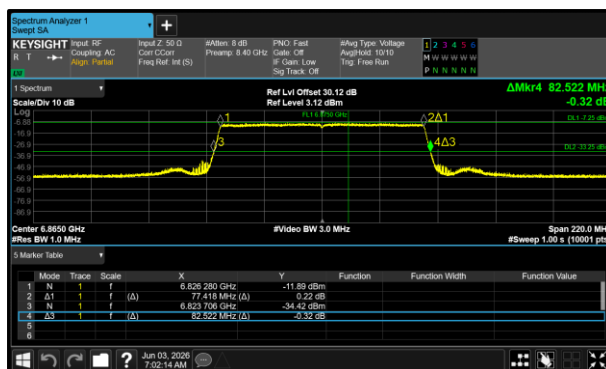


Figure 381 - 802.11ax HE80 SU VLP Minimum
99% OBW

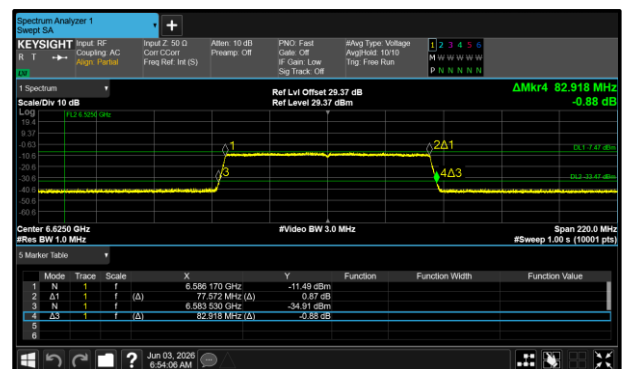


Figure 382 - 802.11ax HE80 SU VLP Maximum
99% OBW

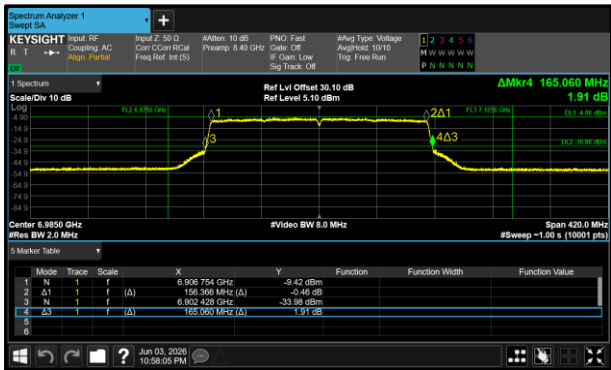


Figure 383 - 802.11ax HE160 SU VLP Minimum
99% OBW

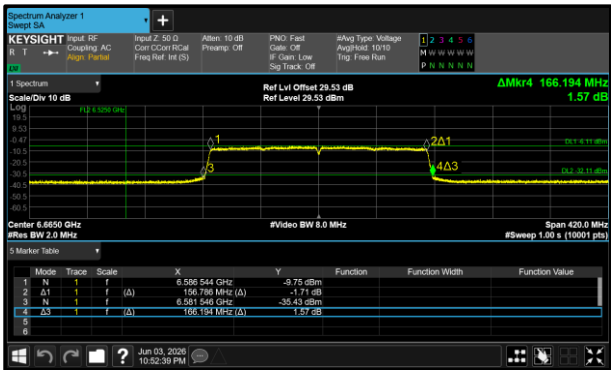


Figure 384 - 802.11ax HE160 SU VLP Maximum
99% OBW



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	21.864	-	-	-	320.0
6175	21.834	-	-	-	320.0
6415	21.816	-	-	-	320.0
6435	21.576	-	-	-	320.0
6475	22.020	-	-	-	320.0
6515	21.936	-	-	-	320.0
6535	21.726	-	-	-	320.0
6695	21.666	-	-	-	320.0
6855	21.792	-	-	-	320.0
6875	21.570	-	-	-	320.0
6895	21.798	-	-	-	320.0
6995	21.588	-	-	-	320.0
7095	21.858	-	-	-	320.0
7115	19.896	-	-	-	320.0

Table 19 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	16.770	-	-	-	320.0
6175	16.764	-	-	-	320.0
6415	16.776	-	-	-	320.0
6435	16.770	-	-	-	320.0
6475	16.770	-	-	-	320.0
6515	16.776	-	-	-	320.0
6535	16.788	-	-	-	320.0
6695	16.764	-	-	-	320.0
6855	16.764	-	-	-	320.0
6875	16.776	-	-	-	320.0
6895	16.770	-	-	-	320.0
6995	16.770	-	-	-	320.0
7095	16.764	-	-	-	320.0
7115	16.362	-	-	-	320.0

Table 20 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	43.884	-	-	-	320.0
6005	43.560	-	-	-	320.0
6165	43.836	-	-	-	320.0
6405	43.680	-	-	-	320.0
6445	44.052	-	-	-	320.0
6485	43.644	-	-	-	320.0
6525	44.004	-	-	-	320.0
6565	43.476	-	-	-	320.0
6725	43.644	-	-	-	320.0
6845	43.536	-	-	-	320.0
6885	43.680	-	-	-	320.0
6925	44.064	-	-	-	320.0
7005	43.944	-	-	-	320.0
7085	43.572	-	-	-	320.0

Table 21 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	36.684	-	-	-	320.0
6005	36.672	-	-	-	320.0
6165	36.672	-	-	-	320.0
6405	36.684	-	-	-	320.0
6445	36.684	-	-	-	320.0
6485	36.672	-	-	-	320.0
6525	36.672	-	-	-	320.0
6565	36.672	-	-	-	320.0
6725	36.672	-	-	-	320.0
6845	36.660	-	-	-	320.0
6885	36.696	-	-	-	320.0
6925	36.672	-	-	-	320.0
7005	36.660	-	-	-	320.0
7085	36.684	-	-	-	320.0

Table 22 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	131.448	-	-	-	320.0
6145	133.008	-	-	-	320.0
6385	131.568	-	-	-	320.0
6465	119.976	-	-	-	320.0
6545	132.210	-	-	-	320.0
6625	132.106	-	-	-	320.0
6705	130.776	-	-	-	320.0
6785	130.584	-	-	-	320.0
6865	133.032	-	-	-	320.0
6945	132.312	-	-	-	320.0
7025	131.872	-	-	-	320.0

Table 23 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	82.224	-	-	-	320.0
6145	80.832	-	-	-	320.0
6385	83.568	-	-	-	320.0
6465	83.496	-	-	-	320.0
6545	83.668	-	-	-	320.0
6625	81.848	-	-	-	320.0
6705	80.568	-	-	-	320.0
6785	81.144	-	-	-	320.0
6865	81.840	-	-	-	320.0
6945	82.392	-	-	-	320.0
7025	82.342	-	-	-	320.0

Table 24 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	163.716	-	-	-	320.0
6185	164.094	-	-	-	320.0
6345	164.514	-	-	-	320.0
6505	166.236	-	-	-	320.0
6665	165.858	-	-	-	320.0
6825	163.968	-	-	-	320.0
6985	165.228	-	-	-	320.0

Table 25 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	155.022	-	-	-	320.0
6185	155.064	-	-	-	320.0
6345	155.106	-	-	-	320.0
6505	155.148	-	-	-	320.0
6665	155.190	-	-	-	320.0
6825	155.106	-	-	-	320.0
6985	155.064	-	-	-	320.0

Table 26 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	23.334	-	-	-	320.0
6175	23.034	-	-	-	320.0
6415	23.232	-	-	-	320.0
6435	23.430	-	-	-	320.0
6475	23.022	-	-	-	320.0
6515	22.662	-	-	-	320.0
6535	23.100	-	-	-	320.0
6695	22.902	-	-	-	320.0
6855	22.986	-	-	-	320.0
6875	22.860	-	-	-	320.0
6895	22.866	-	-	-	320.0
6995	22.788	-	-	-	320.0
7095	23.064	-	-	-	320.0

Table 27 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	19.080	-	-	-	320.0
6175	19.062	-	-	-	320.0
6415	19.068	-	-	-	320.0
6435	19.062	-	-	-	320.0
6475	19.086	-	-	-	320.0
6515	19.062	-	-	-	320.0
6535	19.074	-	-	-	320.0
6695	19.068	-	-	-	320.0
6855	19.074	-	-	-	320.0
6875	19.074	-	-	-	320.0
6895	19.062	-	-	-	320.0
6995	19.062	-	-	-	320.0
7095	19.068	-	-	-	320.0

Table 28 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	45.132	-	-	-	320.0
6005	44.688	-	-	-	320.0
6165	44.988	-	-	-	320.0
6405	44.820	-	-	-	320.0
6445	44.616	-	-	-	320.0
6485	44.952	-	-	-	320.0
6525	44.976	-	-	-	320.0
6565	44.280	-	-	-	320.0
6725	45.084	-	-	-	320.0
6845	44.760	-	-	-	320.0
6885	44.292	-	-	-	320.0
6925	44.928	-	-	-	320.0
7005	44.412	-	-	-	320.0
7085	44.592	-	-	-	320.0

Table 29 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	38.016	-	-	-	320.0
6005	38.040	-	-	-	320.0
6165	38.028	-	-	-	320.0
6405	38.028	-	-	-	320.0
6445	38.016	-	-	-	320.0
6485	38.028	-	-	-	320.0
6525	38.004	-	-	-	320.0
6565	38.016	-	-	-	320.0
6725	38.016	-	-	-	320.0
6845	38.016	-	-	-	320.0
6885	38.004	-	-	-	320.0
6925	38.004	-	-	-	320.0
7005	38.016	-	-	-	320.0
7085	38.028	-	-	-	320.0

Table 30 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	82.852	-	-	-	320.0
6145	82.720	-	-	-	320.0
6385	82.522	-	-	-	320.0
6465	82.500	-	-	-	320.0
6545	82.830	-	-	-	320.0
6625	82.478	-	-	-	320.0
6705	82.522	-	-	-	320.0
6785	82.610	-	-	-	320.0
6865	82.610	-	-	-	320.0
6945	82.346	-	-	-	320.0
7025	82.434	-	-	-	320.0

Table 31 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	77.462	-	-	-	320.0
6145	77.440	-	-	-	320.0
6385	77.484	-	-	-	320.0
6465	77.440	-	-	-	320.0
6545	77.506	-	-	-	320.0
6625	77.440	-	-	-	320.0
6705	77.440	-	-	-	320.0
6785	77.440	-	-	-	320.0
6865	77.396	-	-	-	320.0
6945	77.396	-	-	-	320.0
7025	77.440	-	-	-	320.0

Table 32 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	164.472	-	-	-	320.0
6185	164.682	-	-	-	320.0
6345	164.808	-	-	-	320.0
6505	164.850	-	-	-	320.0
6665	164.892	-	-	-	320.0
6825	164.682	-	-	-	320.0
6985	164.892	-	-	-	320.0

Table 33 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	156.324	-	-	-	320.0
6185	156.240	-	-	-	320.0
6345	156.408	-	-	-	320.0
6505	156.324	-	-	-	320.0
6665	156.408	-	-	-	320.0
6825	156.240	-	-	-	320.0
6985	156.366	-	-	-	320.0

Table 34 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	19.806	-	-	-	320.0
6175	21.570	-	-	-	320.0
6415	21.834	-	-	-	320.0
6535	21.930	-	-	-	320.0
6695	21.708	-	-	-	320.0
6855	21.834	-	-	-	320.0

Table 35 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	16.362	-	-	-	320.0
6175	16.746	-	-	-	320.0
6415	16.788	-	-	-	320.0
6535	16.794	-	-	-	320.0
6695	16.770	-	-	-	320.0
6855	16.758	-	-	-	320.0

Table 36 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	43.490	-	-	-	320.0
6165	53.868	-	-	-	320.0
6405	75.712	-	-	-	320.0
6565	76.400	-	-	-	320.0
6685	75.642	-	-	-	320.0
6845	76.804	-	-	-	320.0

Table 37 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	36.300	-	-	-	320.0
6165	37.848	-	-	-	320.0
6405	40.348	-	-	-	320.0
6565	46.680	-	-	-	320.0
6685	42.308	-	-	-	320.0
6845	44.996	-	-	-	320.0

Table 38 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	94.512	-	-	-	320.0
6145	132.960	-	-	-	320.0
6385	140.738	-	-	-	320.0
6625	134.914	-	-	-	320.0
6705	134.472	-	-	-	320.0
6785	132.366	-	-	-	320.0

Table 39 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	75.658	-	-	-	320.0
6145	84.216	-	-	-	320.0
6385	89.180	-	-	-	320.0
6625	88.322	-	-	-	320.0
6705	87.360	-	-	-	320.0
6785	86.086	-	-	-	320.0

Table 40 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	163.380	-	-	-	320.0
6185	166.950	-	-	-	320.0
6345	296.184	-	-	-	320.0
6665	296.712	-	-	-	320.0

Table 41 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	154.476	-	-	-	320.0
6185	154.518	-	-	-	320.0
6345	156.450	-	-	-	320.0
6665	158.652	-	-	-	320.0

Table 42 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCC (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	21.390	-	-	-	320.0
6175	22.896	-	-	-	320.0
6415	22.902	-	-	-	320.0
6535	23.052	-	-	-	320.0
6695	22.740	-	-	-	320.0
6855	22.800	-	-	-	320.0

Table 43 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	18.810	-	-	-	320.0
6175	19.050	-	-	-	320.0
6415	19.080	-	-	-	320.0
6535	19.074	-	-	-	320.0
6695	19.056	-	-	-	320.0
6855	19.062	-	-	-	320.0

Table 44 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCC (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	42.192	-	-	-	320.0
6165	44.544	-	-	-	320.0
6405	45.108	-	-	-	320.0
6565	45.420	-	-	-	320.0
6685	44.904	-	-	-	320.0
6845	44.460	-	-	-	320.0

Table 45 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	37.608	-	-	-	320.0
6165	37.992	-	-	-	320.0
6405	38.040	-	-	-	320.0
6565	38.040	-	-	-	320.0
6685	37.992	-	-	-	320.0
6845	38.004	-	-	-	320.0

Table 46 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCC (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	81.708	-	-	-	320.0
6145	82.676	-	-	-	320.0
6385	82.544	-	-	-	320.0
6625	83.028	-	-	-	320.0
6705	82.786	-	-	-	320.0
6785	82.544	-	-	-	320.0

Table 47 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	76.692	-	-	-	320.0
6145	77.418	-	-	-	320.0
6385	77.506	-	-	-	320.0
6625	77.506	-	-	-	320.0
6705	77.440	-	-	-	320.0
6785	77.440	-	-	-	320.0

Table 48 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	164.346	-	-	-	320.0
6185	164.094	-	-	-	320.0
6345	166.278	-	-	-	320.0
6665	167.244	-	-	-	320.0

Table 49 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	155.568	-	-	-	320.0
6185	155.484	-	-	-	320.0
6345	155.904	-	-	-	320.0
6665	155.988	-	-	-	320.0

Table 50 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6435	21.774	-	-	-	320.0
6475	21.918	-	-	-	320.0
6515	22.146	-	-	-	320.0

Table 51 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6435	16.764	-	-	-	320.0
6475	16.800	-	-	-	320.0
6515	16.776	-	-	-	320.0

Table 52 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6445	75.292	-	-	-	320.0
6485	75.838	-	-	-	320.0
6525	76.880	-	-	-	320.0

Table 53 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6445	39.648	-	-	-	320.0
6485	40.726	-	-	-	320.0
6525	46.240	-	-	-	320.0

Table 54 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-6 U-NII-7
Limit Clause(s):	RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6465	149.864	-	-	-	320.0
6545	164.668	-	-	-	320.0

Table 55 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6465	88.218	-	-	-	320.0
6545	91.168	-	-	-	320.0

Table 56 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6505	314.664	-	-	-	320.0

Table 57 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6505	158.312	-	-	-	320.0

Table 58 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6435	23.214	-	-	-	320.0
6475	23.106	-	-	-	320.0
6515	22.998	-	-	-	320.0

Table 59 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6435	19.086	-	-	-	320.0
6475	19.062	-	-	-	320.0
6515	19.074	-	-	-	320.0

Table 60 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6445	44.772	-	-	-	320.0
6485	45.432	-	-	-	320.0
6525	45.084	-	-	-	320.0

Table 61 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6445	38.016	-	-	-	320.0
6485	38.016	-	-	-	320.0
6525	38.052	-	-	-	320.0

Table 62 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-6 U-NII-7
Limit Clause(s):	RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6465	82.764	-	-	-	320.0
6545	83.050	-	-	-	320.0

Table 63 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6465	77.484	-	-	-	320.0
6545	77.572	-	-	-	320.0

Table 64 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6505	175.014	-	-	-	320.0

Table 65 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6505	155.946	-	-	-	320.0

Table 66 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	21.906	-	-	-	320.0
6255	21.906	-	-	-	320.0
6415	21.954	-	-	-	320.0
6435	21.696	-	-	-	320.0
6475	22.056	-	-	-	320.0
6515	21.642	-	-	-	320.0
6535	22.068	-	-	-	320.0
6695	21.654	-	-	-	320.0
6855	21.792	-	-	-	320.0
6875	21.780	-	-	-	320.0
6895	21.888	-	-	-	320.0
6995	21.756	-	-	-	320.0
7095	21.978	-	-	-	320.0
7115	19.932	-	-	-	320.0

Table 67 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	16.782	-	-	-	320.0
6255	16.806	-	-	-	320.0
6415	16.782	-	-	-	320.0
6435	16.746	-	-	-	320.0
6475	16.776	-	-	-	320.0
6515	16.758	-	-	-	320.0
6535	16.812	-	-	-	320.0
6695	16.782	-	-	-	320.0
6855	16.806	-	-	-	320.0
6875	16.800	-	-	-	320.0
6895	16.806	-	-	-	320.0
6995	16.770	-	-	-	320.0
7095	16.770	-	-	-	320.0
7115	16.362	-	-	-	320.0

Table 68 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6125	44.328	-	-	-	320.0
6245	44.100	-	-	-	320.0
6405	43.980	-	-	-	320.0
6445	43.668	-	-	-	320.0
6485	43.380	-	-	-	320.0
6525	44.280	-	-	-	320.0
6565	44.112	-	-	-	320.0
6725	43.956	-	-	-	320.0
6845	43.980	-	-	-	320.0
6885	43.440	-	-	-	320.0
6925	43.632	-	-	-	320.0
7005	43.740	-	-	-	320.0
7085	44.292	-	-	-	320.0

Table 69 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6125	36.684	-	-	-	320.0
6245	36.708	-	-	-	320.0
6405	36.708	-	-	-	320.0
6445	36.708	-	-	-	320.0
6485	36.696	-	-	-	320.0
6525	36.696	-	-	-	320.0
6565	36.696	-	-	-	320.0
6725	36.672	-	-	-	320.0
6845	36.708	-	-	-	320.0
6885	36.696	-	-	-	320.0
6925	36.684	-	-	-	320.0
7005	36.672	-	-	-	320.0
7085	36.708	-	-	-	320.0

Table 70 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6145	133.440	-	-	-	320.0
6225	132.192	-	-	-	320.0
6305	129.888	-	-	-	320.0
6385	131.832	-	-	-	320.0
6465	120.720	-	-	-	320.0
6545	133.008	-	-	-	320.0
6625	131.832	-	-	-	320.0
6705	132.192	-	-	-	320.0
6785	131.544	-	-	-	320.0
6865	130.032	-	-	-	320.0
6945	130.248	-	-	-	320.0
7025	130.008	-	-	-	320.0

Table 71 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6145	81.480	-	-	-	320.0
6225	82.968	-	-	-	320.0
6305	82.224	-	-	-	320.0
6385	83.976	-	-	-	320.0
6465	83.616	-	-	-	320.0
6545	83.592	-	-	-	320.0
6625	81.960	-	-	-	320.0
6705	81.048	-	-	-	320.0
6785	81.720	-	-	-	320.0
6865	83.112	-	-	-	320.0
6945	82.896	-	-	-	320.0
7025	83.088	-	-	-	320.0

Table 72 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6185	164.850	-	-	-	320.0
6345	164.640	-	-	-	320.0
6505	164.514	-	-	-	320.0
6665	166.656	-	-	-	320.0
6825	164.388	-	-	-	320.0
6985	164.052	-	-	-	320.0

Table 73 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6185	155.064	-	-	-	320.0
6345	155.190	-	-	-	320.0
6505	155.190	-	-	-	320.0
6665	155.190	-	-	-	320.0
6825	155.064	-	-	-	320.0
6985	155.106	-	-	-	320.0

Table 74 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	22.866	-	-	-	320.0
6255	23.496	-	-	-	320.0
6415	23.148	-	-	-	320.0
6435	23.112	-	-	-	320.0
6475	23.172	-	-	-	320.0
6515	23.094	-	-	-	320.0
6535	22.866	-	-	-	320.0
6695	22.692	-	-	-	320.0
6855	23.022	-	-	-	320.0
6875	22.926	-	-	-	320.0
6895	22.560	-	-	-	320.0
6995	22.854	-	-	-	320.0
7095	22.848	-	-	-	320.0

Table 75 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	19.086	-	-	-	320.0
6255	19.074	-	-	-	320.0
6415	19.074	-	-	-	320.0
6435	19.044	-	-	-	320.0
6475	19.080	-	-	-	320.0
6515	19.068	-	-	-	320.0
6535	19.080	-	-	-	320.0
6695	19.062	-	-	-	320.0
6855	19.086	-	-	-	320.0
6875	19.074	-	-	-	320.0
6895	19.074	-	-	-	320.0
6995	19.068	-	-	-	320.0
7095	19.056	-	-	-	320.0

Table 76 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6125	44.628	-	-	-	320.0
6245	45.096	-	-	-	320.0
6405	44.136	-	-	-	320.0
6445	44.976	-	-	-	320.0
6485	44.628	-	-	-	320.0
6525	44.988	-	-	-	320.0
6565	44.328	-	-	-	320.0
6725	44.844	-	-	-	320.0
6845	45.228	-	-	-	320.0
6885	44.724	-	-	-	320.0
6925	44.472	-	-	-	320.0
7005	44.124	-	-	-	320.0
7085	44.880	-	-	-	320.0

Table 77 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6125	38.016	-	-	-	320.0
6245	38.040	-	-	-	320.0
6405	38.016	-	-	-	320.0
6445	38.016	-	-	-	320.0
6485	38.016	-	-	-	320.0
6525	38.028	-	-	-	320.0
6565	38.016	-	-	-	320.0
6725	38.028	-	-	-	320.0
6845	38.028	-	-	-	320.0
6885	38.028	-	-	-	320.0
6925	38.004	-	-	-	320.0
7005	38.004	-	-	-	320.0
7085	38.064	-	-	-	320.0

Table 78 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6145	82.500	-	-	-	320.0
6225	82.918	-	-	-	320.0
6305	82.434	-	-	-	320.0
6385	82.764	-	-	-	320.0
6465	82.808	-	-	-	320.0
6545	82.654	-	-	-	320.0
6625	82.412	-	-	-	320.0
6705	82.676	-	-	-	320.0
6785	82.654	-	-	-	320.0
6865	82.852	-	-	-	320.0
6945	82.588	-	-	-	320.0
7025	82.654	-	-	-	320.0

Table 79 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6145	77.462	-	-	-	320.0
6225	77.440	-	-	-	320.0
6305	77.462	-	-	-	320.0
6385	77.506	-	-	-	320.0
6465	77.462	-	-	-	320.0
6545	77.484	-	-	-	320.0
6625	77.484	-	-	-	320.0
6705	77.440	-	-	-	320.0
6785	77.418	-	-	-	320.0
6865	77.484	-	-	-	320.0
6945	77.396	-	-	-	320.0
7025	77.440	-	-	-	320.0

Table 80 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6185	164.682	-	-	-	320.0
6345	164.850	-	-	-	320.0
6505	164.766	-	-	-	320.0
6665	164.808	-	-	-	320.0
6825	164.766	-	-	-	320.0
6985	164.766	-	-	-	320.0

Table 81 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6185	156.282	-	-	-	320.0
6345	156.450	-	-	-	320.0
6505	156.366	-	-	-	320.0
6665	156.450	-	-	-	320.0
6825	156.324	-	-	-	320.0
6985	156.366	-	-	-	320.0

Table 82 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	21.738	-	-	320.0
6175	-	21.714	-	-	320.0
6415	-	21.546	-	-	320.0
6435	-	21.690	-	-	320.0
6475	-	21.912	-	-	320.0
6515	-	21.558	-	-	320.0
6535	-	21.558	-	-	320.0
6695	-	21.882	-	-	320.0
6855	-	21.972	-	-	320.0
6875	-	21.648	-	-	320.0
6895	-	22.026	-	-	320.0
6995	-	21.564	-	-	320.0
7095	-	21.996	-	-	320.0
7115	-	19.776	-	-	320.0

Table 83 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	16.788	-	-	320.0
6175	-	16.764	-	-	320.0
6415	-	16.776	-	-	320.0
6435	-	16.782	-	-	320.0
6475	-	16.764	-	-	320.0
6515	-	16.776	-	-	320.0
6535	-	16.782	-	-	320.0
6695	-	16.776	-	-	320.0
6855	-	16.776	-	-	320.0
6875	-	16.776	-	-	320.0
6895	-	16.776	-	-	320.0
6995	-	16.764	-	-	320.0
7095	-	16.782	-	-	320.0
7115	-	16.374	-	-	320.0

Table 84 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	-	43.920	-	-	320.0
6165	-	44.244	-	-	320.0
6405	-	44.040	-	-	320.0
6445	-	44.280	-	-	320.0
6485	-	44.412	-	-	320.0
6525	-	43.596	-	-	320.0
6565	-	43.608	-	-	320.0
6725	-	44.196	-	-	320.0
6845	-	43.860	-	-	320.0
6885	-	43.392	-	-	320.0
6925	-	44.208	-	-	320.0
7005	-	44.244	-	-	320.0
7085	-	43.620	-	-	320.0

Table 85 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	-	36.696	-	-	320.0
6165	-	36.660	-	-	320.0
6405	-	36.684	-	-	320.0
6445	-	36.672	-	-	320.0
6485	-	36.672	-	-	320.0
6525	-	36.696	-	-	320.0
6565	-	36.660	-	-	320.0
6725	-	36.672	-	-	320.0
6845	-	36.672	-	-	320.0
6885	-	36.672	-	-	320.0
6925	-	36.660	-	-	320.0
7005	-	36.672	-	-	320.0
7085	-	36.660	-	-	320.0

Table 86 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	-	132.456	-	-	320.0
6145	-	114.888	-	-	320.0
6385	-	131.112	-	-	320.0
6465	-	116.766	-	-	320.0
6545	-	116.568	-	-	320.0
6625	-	132.144	-	-	320.0
6705	-	116.952	-	-	320.0
6785	-	116.976	-	-	320.0
6865	-	132.312	-	-	320.0
6945	-	129.792	-	-	320.0
7025	-	131.616	-	-	320.0

Table 87 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	-	82.104	-	-	320.0
6145	-	77.280	-	-	320.0
6385	-	83.064	-	-	320.0
6465	-	77.376	-	-	320.0
6545	-	77.544	-	-	320.0
6625	-	81.840	-	-	320.0
6705	-	77.472	-	-	320.0
6785	-	77.544	-	-	320.0
6865	-	82.656	-	-	320.0
6945	-	82.416	-	-	320.0
7025	-	82.512	-	-	320.0

Table 88 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	-	164.724	-	-	320.0
6185	-	164.640	-	-	320.0
6345	-	165.900	-	-	320.0
6505	-	164.136	-	-	320.0
6665	-	164.682	-	-	320.0
6825	-	164.556	-	-	320.0
6985	-	164.094	-	-	320.0

Table 89 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	-	155.022	-	-	320.0
6185	-	155.106	-	-	320.0
6345	-	155.148	-	-	320.0
6505	-	155.022	-	-	320.0
6665	-	155.106	-	-	320.0
6825	-	155.190	-	-	320.0
6985	-	155.106	-	-	320.0

Table 90 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	22.752	-	-	320.0
6175	-	22.740	-	-	320.0
6415	-	22.992	-	-	320.0
6435	-	23.076	-	-	320.0
6475	-	23.232	-	-	320.0
6515	-	22.662	-	-	320.0
6535	-	23.172	-	-	320.0
6695	-	22.878	-	-	320.0
6855	-	23.058	-	-	320.0
6875	-	22.878	-	-	320.0
6895	-	23.208	-	-	320.0
6995	-	22.860	-	-	320.0
7095	-	23.316	-	-	320.0

Table 91 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	19.074	-	-	320.0
6175	-	19.062	-	-	320.0
6415	-	19.068	-	-	320.0
6435	-	19.086	-	-	320.0
6475	-	19.074	-	-	320.0
6515	-	19.080	-	-	320.0
6535	-	19.074	-	-	320.0
6695	-	19.068	-	-	320.0
6855	-	19.062	-	-	320.0
6875	-	19.062	-	-	320.0
6895	-	19.074	-	-	320.0
6995	-	19.074	-	-	320.0
7095	-	19.062	-	-	320.0

Table 92 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	-	44.448	-	-	320.0
6165	-	44.460	-	-	320.0
6405	-	44.928	-	-	320.0
6445	-	45.060	-	-	320.0
6485	-	44.340	-	-	320.0
6525	-	44.508	-	-	320.0
6565	-	44.976	-	-	320.0
6725	-	44.520	-	-	320.0
6845	-	44.064	-	-	320.0
6885	-	44.544	-	-	320.0
6925	-	44.436	-	-	320.0
7005	-	44.352	-	-	320.0
7085	-	44.664	-	-	320.0

Table 93 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	-	38.004	-	-	320.0
6165	-	38.016	-	-	320.0
6405	-	38.004	-	-	320.0
6445	-	38.016	-	-	320.0
6485	-	38.004	-	-	320.0
6525	-	38.004	-	-	320.0
6565	-	38.028	-	-	320.0
6725	-	38.004	-	-	320.0
6845	-	37.992	-	-	320.0
6885	-	38.016	-	-	320.0
6925	-	38.004	-	-	320.0
7005	-	38.016	-	-	320.0
7085	-	37.992	-	-	320.0

Table 94 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	-	82.742	-	-	320.0
6145	-	82.500	-	-	320.0
6385	-	82.676	-	-	320.0
6465	-	82.544	-	-	320.0
6545	-	82.764	-	-	320.0
6625	-	82.698	-	-	320.0
6705	-	82.676	-	-	320.0
6785	-	82.654	-	-	320.0
6865	-	82.830	-	-	320.0
6945	-	82.676	-	-	320.0
7025	-	82.720	-	-	320.0

Table 95 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	-	77.418	-	-	320.0
6145	-	77.418	-	-	320.0
6385	-	77.484	-	-	320.0
6465	-	77.440	-	-	320.0
6545	-	77.462	-	-	320.0
6625	-	77.440	-	-	320.0
6705	-	77.440	-	-	320.0
6785	-	77.396	-	-	320.0
6865	-	77.484	-	-	320.0
6945	-	77.440	-	-	320.0
7025	-	77.440	-	-	320.0

Table 96 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	-	164.640	-	-	320.0
6185	-	164.766	-	-	320.0
6345	-	165.018	-	-	320.0
6505	-	164.598	-	-	320.0
6665	-	164.556	-	-	320.0
6825	-	164.388	-	-	320.0
6985	-	164.808	-	-	320.0

Table 97 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	-	156.282	-	-	320.0
6185	-	156.324	-	-	320.0
6345	-	156.492	-	-	320.0
6505	-	156.324	-	-	320.0
6665	-	156.240	-	-	320.0
6825	-	156.240	-	-	320.0
6985	-	156.366	-	-	320.0

Table 98 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	20.022	-	-	320.0
6175	-	21.828	-	-	320.0
6415	-	21.864	-	-	320.0
6535	-	21.780	-	-	320.0
6695	-	21.618	-	-	320.0
6855	-	22.044	-	-	320.0

Table 99 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	16.476	-	-	320.0
6175	-	16.758	-	-	320.0
6415	-	16.764	-	-	320.0
6535	-	16.764	-	-	320.0
6695	-	16.764	-	-	320.0
6855	-	16.764	-	-	320.0

Table 100 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	-	46.960	-	-	320.0
6165	-	65.856	-	-	320.0
6405	-	63.036	-	-	320.0
6565	-	61.632	-	-	320.0
6685	-	64.884	-	-	320.0
6845	-	78.372	-	-	320.0

Table 101 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	-	36.370	-	-	320.0
6165	-	38.340	-	-	320.0
6405	-	37.992	-	-	320.0
6565	-	37.920	-	-	320.0
6685	-	38.172	-	-	320.0
6845	-	41.472	-	-	320.0

Table 102 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	-	96.536	-	-	320.0
6145	-	133.120	-	-	320.0
6385	-	133.536	-	-	320.0
6625	-	133.432	-	-	320.0
6705	-	133.536	-	-	320.0
6785	-	132.938	-	-	320.0

Table 103 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	-	75.724	-	-	320.0
6145	-	85.254	-	-	320.0
6385	-	85.618	-	-	320.0
6625	-	84.760	-	-	320.0
6705	-	84.734	-	-	320.0
6785	-	85.618	-	-	320.0

Table 104 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	-	165.984	-	-	320.0
6185	-	167.328	-	-	320.0
6345	-	166.992	-	-	320.0
6665	-	167.244	-	-	320.0

Table 105 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	-	154.518	-	-	320.0
6185	-	154.602	-	-	320.0
6345	-	154.686	-	-	320.0
6665	-	154.518	-	-	320.0

Table 106 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCC (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	21.744	-	-	320.0
6175	-	23.448	-	-	320.0
6415	-	22.806	-	-	320.0
6535	-	22.848	-	-	320.0
6695	-	23.070	-	-	320.0
6855	-	23.160	-	-	320.0

Table 107 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	18.792	-	-	320.0
6175	-	19.056	-	-	320.0
6415	-	19.074	-	-	320.0
6535	-	19.050	-	-	320.0
6695	-	19.062	-	-	320.0
6855	-	19.074	-	-	320.0

Table 108 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	-	42.252	-	-	320.0
6165	-	45.264	-	-	320.0
6405	-	44.712	-	-	320.0
6565	-	45.036	-	-	320.0
6685	-	44.316	-	-	320.0
6845	-	45.060	-	-	320.0

Table 109 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	-	37.620	-	-	320.0
6165	-	38.004	-	-	320.0
6405	-	38.004	-	-	320.0
6565	-	38.028	-	-	320.0
6685	-	38.004	-	-	320.0
6845	-	38.016	-	-	320.0

Table 110 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	-	81.576	-	-	320.0
6145	-	82.808	-	-	320.0
6385	-	82.566	-	-	320.0
6625	-	82.676	-	-	320.0
6705	-	82.698	-	-	320.0
6785	-	82.544	-	-	320.0

Table 111 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	-	76.714	-	-	320.0
6145	-	77.418	-	-	320.0
6385	-	77.484	-	-	320.0
6625	-	77.440	-	-	320.0
6705	-	77.462	-	-	320.0
6785	-	77.418	-	-	320.0

Table 112 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	-	163.968	-	-	320.0
6185	-	164.346	-	-	320.0
6345	-	164.052	-	-	320.0
6665	-	164.262	-	-	320.0

Table 113 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	-	155.526	-	-	320.0
6185	-	155.610	-	-	320.0
6345	-	155.736	-	-	320.0
6665	-	155.568	-	-	320.0

Table 114 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6435	-	21.660	-	-	320.0
6475	-	21.816	-	-	320.0
6515	-	21.492	-	-	320.0

Table 115 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6435	-	16.752	-	-	320.0
6475	-	16.758	-	-	320.0
6515	-	16.758	-	-	320.0

Table 116 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6445	-	60.000	-	-	320.0
6485	-	61.476	-	-	320.0
6525	-	56.676	-	-	320.0

Table 117 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6445	-	37.992	-	-	320.0
6485	-	37.908	-	-	320.0
6525	-	37.944	-	-	320.0

Table 118 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-6 U-NII-7
Limit Clause(s):	RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6465	-	131.924	-	-	320.0
6545	-	134.472	-	-	320.0

Table 119 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6465	-	84.682	-	-	320.0
6545	-	84.994	-	-	320.0

Table 120 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6505	-	165.522	-	-	320.0

Table 121 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6505	-	154.518	-	-	320.0

Table 122 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6435	-	23.184	-	-	320.0
6475	-	22.914	-	-	320.0
6515	-	22.728	-	-	320.0

Table 123 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6435	-	19.062	-	-	320.0
6475	-	19.068	-	-	320.0
6515	-	19.062	-	-	320.0

Table 124 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6445	-	44.460	-	-	320.0
6485	-	44.832	-	-	320.0
6525	-	44.580	-	-	320.0

Table 125 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6445	-	38.004	-	-	320.0
6485	-	37.992	-	-	320.0
6525	-	38.004	-	-	320.0

Table 126 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-6 U-NII-7
Limit Clause(s):	RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6465	-	82.500	-	-	320.0
6545	-	82.478	-	-	320.0

Table 127 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6465	-	77.440	-	-	320.0
6545	-	77.440	-	-	320.0

Table 128 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6505	-	164.220	-	-	320.0

Table 129 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6505	-	155.484	-	-	320.0

Table 130 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	-	21.810	-	-	320.0
6255	-	21.624	-	-	320.0
6415	-	21.756	-	-	320.0
6435	-	21.588	-	-	320.0
6475	-	21.804	-	-	320.0
6515	-	21.906	-	-	320.0
6535	-	21.684	-	-	320.0
6695	-	21.804	-	-	320.0
6855	-	21.714	-	-	320.0
6875	-	21.522	-	-	320.0
6895	-	22.152	-	-	320.0
6995	-	21.846	-	-	320.0
7115	-	19.776	-	-	320.0

Table 131 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	-	16.782	-	-	320.0
6255	-	16.782	-	-	320.0
6415	-	16.764	-	-	320.0
6435	-	16.764	-	-	320.0
6475	-	16.764	-	-	320.0
6515	-	16.764	-	-	320.0
6535	-	16.776	-	-	320.0
6695	-	16.764	-	-	320.0
6855	-	16.764	-	-	320.0
6875	-	16.758	-	-	320.0
6895	-	16.794	-	-	320.0
6995	-	16.800	-	-	320.0
7115	-	16.356	-	-	320.0

Table 132 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6125	-	43.968	-	-	320.0
6245	-	44.148	-	-	320.0
6405	-	43.872	-	-	320.0
6445	-	43.884	-	-	320.0
6485	-	44.040	-	-	320.0
6525	-	43.740	-	-	320.0
6565	-	44.352	-	-	320.0
6725	-	44.064	-	-	320.0
6845	-	44.220	-	-	320.0
6885	-	43.584	-	-	320.0
6925	-	44.196	-	-	320.0
7005	-	43.884	-	-	320.0
7085	-	43.956	-	-	320.0

Table 133 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6125	-	36.672	-	-	320.0
6245	-	36.672	-	-	320.0
6405	-	36.696	-	-	320.0
6445	-	36.696	-	-	320.0
6485	-	36.672	-	-	320.0
6525	-	36.696	-	-	320.0
6565	-	36.684	-	-	320.0
6725	-	36.684	-	-	320.0
6845	-	36.696	-	-	320.0
6885	-	36.696	-	-	320.0
6925	-	36.684	-	-	320.0
7005	-	36.708	-	-	320.0
7085	-	36.684	-	-	320.0

Table 134 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6145	-	133.128	-	-	320.0
6225	-	132.576	-	-	320.0
6385	-	133.016	-	-	320.0
6465	-	130.176	-	-	320.0
6545	-	131.144	-	-	320.0
6625	-	131.808	-	-	320.0
6705	-	130.944	-	-	320.0
6785	-	120.900	-	-	320.0
6865	-	130.560	-	-	320.0
6945	-	131.952	-	-	320.0
7025	-	130.680	-	-	320.0

Table 135 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6145	-	81.072	-	-	320.0
6225	-	82.056	-	-	320.0
6385	-	83.434	-	-	320.0
6465	-	82.176	-	-	320.0
6545	-	82.914	-	-	320.0
6625	-	82.416	-	-	320.0
6705	-	82.248	-	-	320.0
6785	-	82.550	-	-	320.0
6865	-	83.352	-	-	320.0
6945	-	82.728	-	-	320.0
7025	-	82.776	-	-	320.0

Table 136 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6185	-	164.472	-	-	320.0
6345	-	165.270	-	-	320.0
6505	-	164.724	-	-	320.0
6665	-	164.892	-	-	320.0
6825	-	164.472	-	-	320.0
6985	-	164.766	-	-	320.0

Table 137 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6185	-	155.106	-	-	320.0
6345	-	155.190	-	-	320.0
6505	-	155.148	-	-	320.0
6665	-	155.064	-	-	320.0
6825	-	155.106	-	-	320.0
6985	-	155.232	-	-	320.0

Table 138 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	-	23.100	-	-	320.0
6255	-	23.040	-	-	320.0
6415	-	22.872	-	-	320.0
6435	-	22.968	-	-	320.0
6475	-	23.196	-	-	320.0
6515	-	22.818	-	-	320.0
6535	-	23.082	-	-	320.0
6695	-	22.872	-	-	320.0
6855	-	23.184	-	-	320.0
6875	-	22.926	-	-	320.0
6895	-	23.346	-	-	320.0
7095	-	22.884	-	-	320.0

Table 139 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	-	19.086	-	-	320.0
6255	-	19.074	-	-	320.0
6415	-	19.092	-	-	320.0
6435	-	19.074	-	-	320.0
6475	-	19.074	-	-	320.0
6515	-	19.056	-	-	320.0
6535	-	19.080	-	-	320.0
6695	-	19.068	-	-	320.0
6855	-	19.086	-	-	320.0
6875	-	19.068	-	-	320.0
6895	-	19.086	-	-	320.0
7095	-	19.086	-	-	320.0

Table 140 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6125	-	44.220	-	-	320.0
6245	-	44.628	-	-	320.0
6405	-	44.748	-	-	320.0
6445	-	44.820	-	-	320.0
6485	-	44.724	-	-	320.0
6525	-	45.072	-	-	320.0
6565	-	45.024	-	-	320.0
6725	-	44.916	-	-	320.0
6845	-	44.628	-	-	320.0
6885	-	44.520	-	-	320.0
6925	-	44.724	-	-	320.0
7005	-	45.432	-	-	320.0
7085	-	44.844	-	-	320.0

Table 141 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6125	-	38.004	-	-	320.0
6245	-	38.028	-	-	320.0
6405	-	38.016	-	-	320.0
6445	-	38.016	-	-	320.0
6485	-	38.004	-	-	320.0
6525	-	38.052	-	-	320.0
6565	-	38.040	-	-	320.0
6725	-	38.016	-	-	320.0
6845	-	38.052	-	-	320.0
6885	-	38.028	-	-	320.0
6925	-	38.028	-	-	320.0
7005	-	38.040	-	-	320.0
7085	-	38.004	-	-	320.0

Table 142 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6145	-	82.874	-	-	320.0
6225	-	82.676	-	-	320.0
6385	-	82.962	-	-	320.0
6465	-	82.456	-	-	320.0
6545	-	82.720	-	-	320.0
6625	-	82.522	-	-	320.0
6705	-	82.720	-	-	320.0
6785	-	82.654	-	-	320.0
6865	-	82.852	-	-	320.0
6945	-	82.588	-	-	320.0
7025	-	82.918	-	-	320.0

Table 143 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6145	-	77.418	-	-	320.0
6225	-	77.440	-	-	320.0
6385	-	77.484	-	-	320.0
6465	-	77.484	-	-	320.0
6545	-	77.462	-	-	320.0
6625	-	77.462	-	-	320.0
6705	-	77.462	-	-	320.0
6785	-	77.440	-	-	320.0
6865	-	77.484	-	-	320.0
6945	-	77.440	-	-	320.0
7025	-	77.484	-	-	320.0

Table 144 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6185	-	164.766	-	-	320.0
6345	-	164.472	-	-	320.0
6505	-	164.598	-	-	320.0
6665	-	164.976	-	-	320.0
6825	-	164.598	-	-	320.0
6985	-	164.892	-	-	320.0

Table 145 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6185	-	156.366	-	-	320.0
6345	-	156.492	-	-	320.0
6505	-	156.324	-	-	320.0
6665	-	156.282	-	-	320.0
6825	-	156.324	-	-	320.0
6985	-	156.366	-	-	320.0

Table 146 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	21.786	22.242	-	-	320.0
6175	21.834	22.014	-	-	320.0
6415	21.672	22.482	-	-	320.0
6435	21.978	21.828	-	-	320.0
6475	21.738	21.732	-	-	320.0
6515	22.014	22.152	-	-	320.0
6535	21.720	22.200	-	-	320.0
6695	21.984	22.050	-	-	320.0
6855	21.420	22.086	-	-	320.0
6875	21.900	22.122	-	-	320.0
6895	21.864	22.200	-	-	320.0
6995	21.774	21.930	-	-	320.0
7095	21.858	22.380	-	-	320.0
7115	19.908	19.872	-	-	320.0

Table 147 - 26 dB Bandwidth Results