



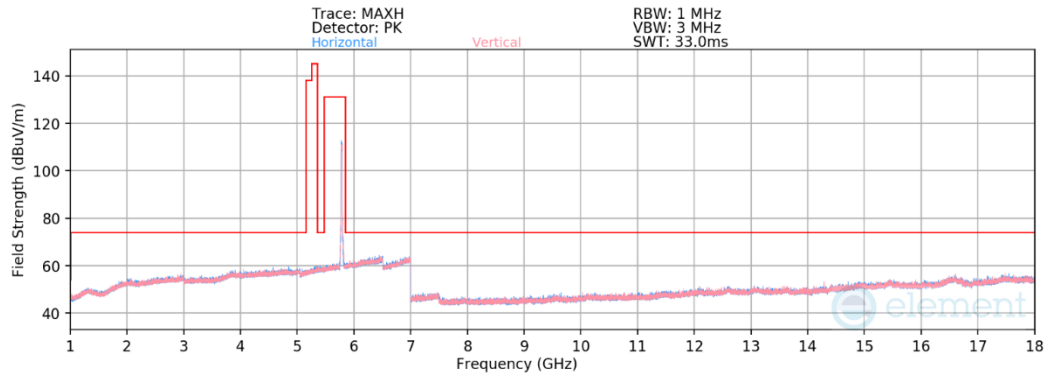

Plot 7-128. Radiated Spurious Emissions above 1 GHz CDD Primary (802.11be(SU) – Ch. 157)

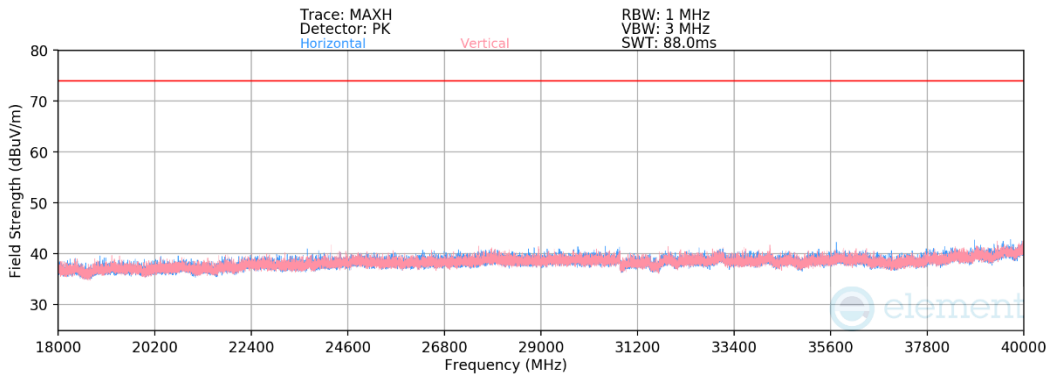


Plot 7-129. Radiated Spurious Emissions 18 GHz - 40 GHz CDD Primary (802.11be(SU) – Ch.157)

Mode:	802.11be(SU)
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5785 MHz
Channel:	157

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11570.00	Average	H	-	-	-80.32	13.56	0.00	40.23	53.98	-13.75
*	11570.00	Peak	H	-	-	-69.39	13.56	0.00	51.17	73.98	-22.81
	17355.00	Peak	V	-	-	-71.42	19.80	0.00	55.38	68.23	-12.85
	23140.00	Peak	H	-	-	-52.01	-5.67	-9.54	39.79	68.23	-28.44
	28925.00	Peak	V	-	-	-54.20	-2.88	-9.54	40.39	68.23	-27.84
	34710.00	Peak	V	-	-	-51.27	-4.60	-9.54	41.59	68.23	-26.64

Table 7-136. Radiated Measurements CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 150 of 267

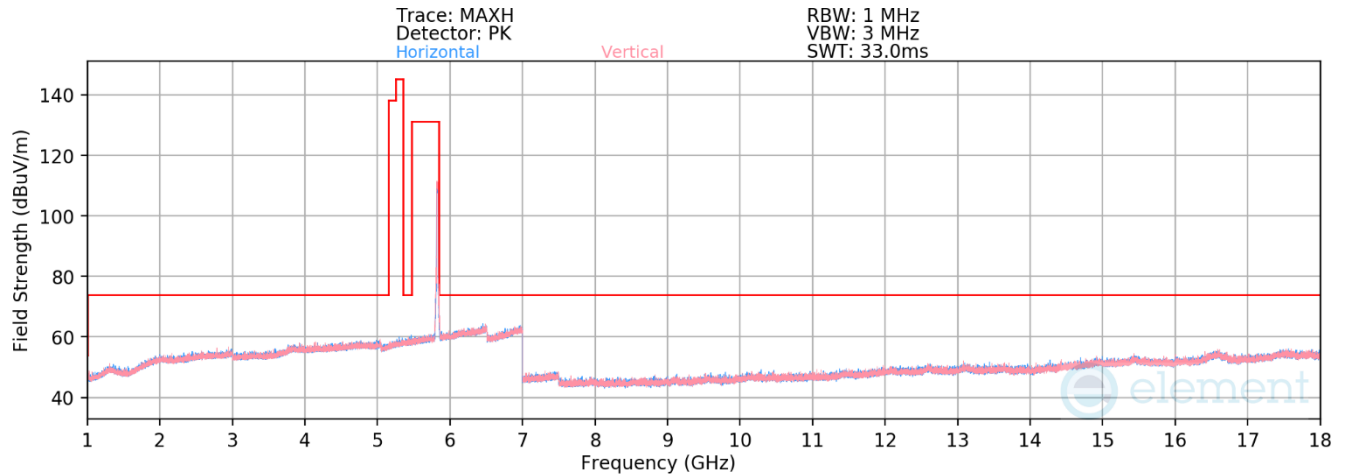

Plot 7-130. Radiated Spurious Emissions above 1 GHz CDD Primary (802.11be(SU) – Ch. 165)


Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5825 MHz
Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	V	-	-	-80.59	13.63	40.04	53.98	-13.94
* 11650.00	Peak	V	-	-	-69.14	13.63	51.49	73.98	-22.49
17475.00	Peak	V	-	-	-71.49	20.09	55.60	68.23	-12.63

Table 7-137. Radiated Measurements CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 151 of 267

7.6.2 CDD/SDM Diversity Radiated Spurious Emission

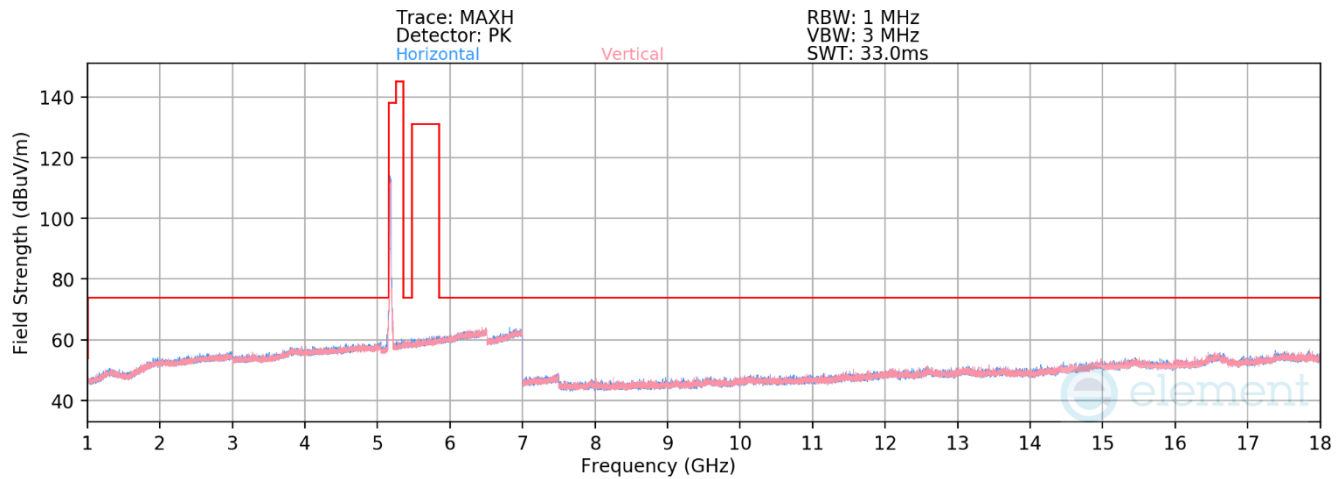


Plot 7-131. Radiated Spurious Emissions above 1 GHz CDD Diversity (802.11n – Ch. 36)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5180 MHz
Channel: 36


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10360.00	Peak	H	-	-	-69.75	11.67	48.91	68.23	-19.32
* 15540.00	Average	H	-	-	-81.11	18.37	44.26	53.98	-9.72
* 15540.00	Peak	H	-	-	-70.69	18.37	54.68	73.98	-19.30

Table 7-138. Radiated Measurements CDD Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 152 of 267

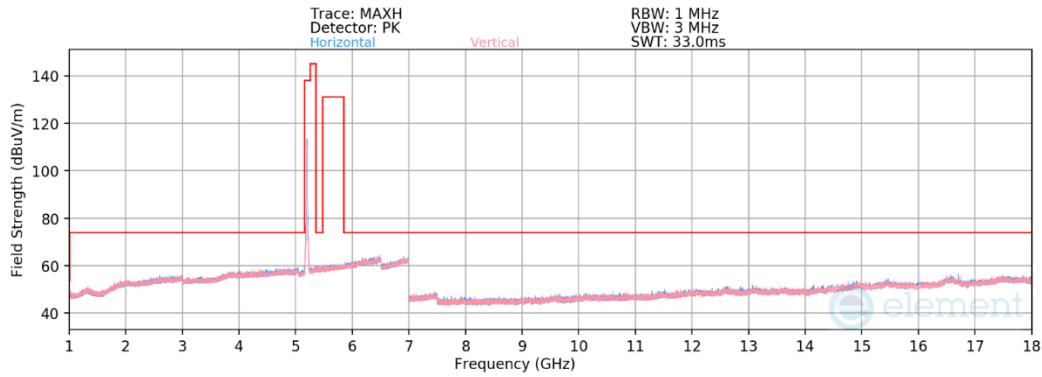

Plot 7-132. Radiated Spurious Emissions above 1 GHz CDD Diversity (802.11n – Ch. 40)

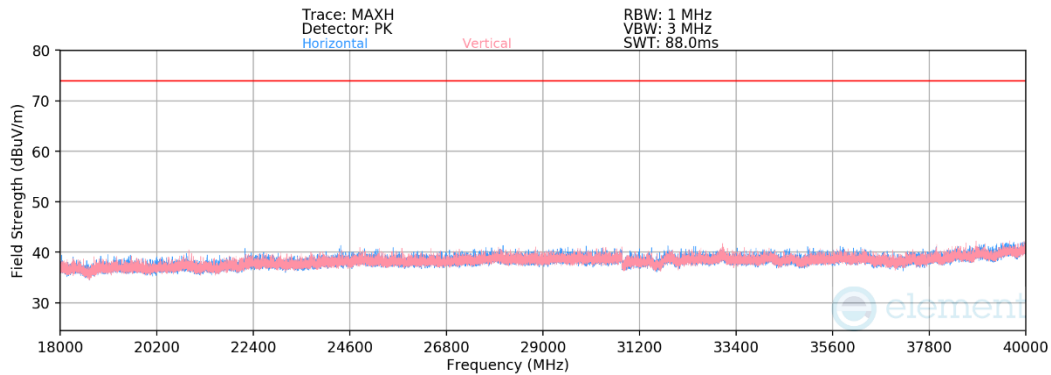


Plot 7-133. Radiated Spurious Emissions 18 GHz - 40 GHz CDD Diversity (802.11n – Ch.40)

Mode: 802.11n
 Data Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5200 MHz
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10400.00	Peak	V	-	-	-69.41	12.10	0.00	49.68	68.23	-18.55
* 15600.00	Average	H	-	-	-81.62	18.75	0.00	44.13	53.98	-9.85
* 15600.00	Peak	H	-	-	-70.57	18.75	0.00	55.18	73.98	-18.80
* 20800.00	Average	H	-	-	-63.05	-5.87	-9.54	28.54	53.98	-25.44
* 20800.00	Peak	H	-	-	-51.76	-5.87	-9.54	39.82	73.98	-34.16
26000.00	Peak	V	-	-	-53.23	-4.40	-9.54	39.82	68.23	-28.41
* 31200.00	Average	H	-	-	-67.45	-2.74	-9.54	27.27	53.98	-26.71
* 31200.00	Peak	H	-	-	-57.45	-2.65	-9.54	37.36	73.98	-36.62
36400.00	Peak	H	-	-	-53.47	-4.89	-9.54	39.10	68.23	-29.13

Table 7-139. Radiated Measurements CDD Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 153 of 267

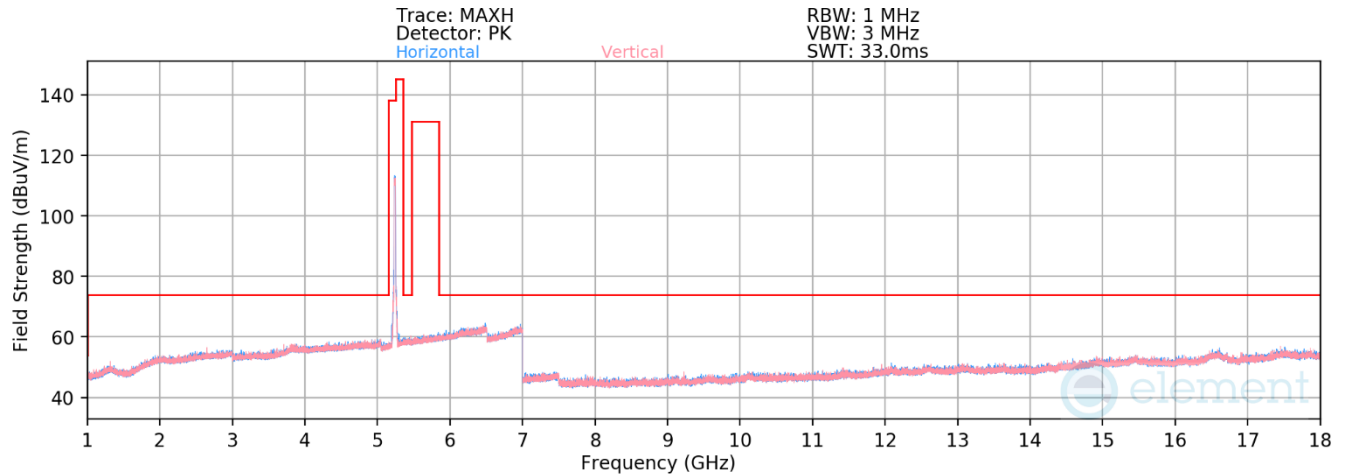


Plot 7-134. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11n – Ch. 48)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5240 MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	H	-	-	-69.01	12.29	50.28	68.23	-17.95
* 15720.00	Average	H	-	-	-81.70	18.53	43.83	53.98	-10.15
* 15720.00	Peak	H	-	-	-70.63	18.53	54.90	73.98	-19.08

Table 7-140. Radiated Measurements SDM Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 154 of 267

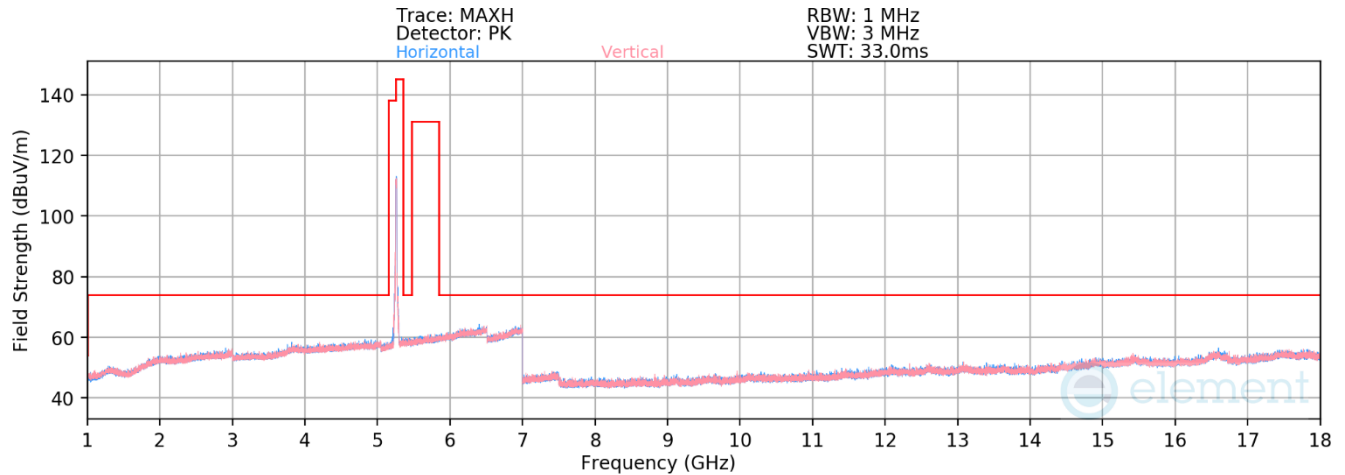


Plot 7-135. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11n – Ch. 52)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5260 MHz
Channel: 52


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10520.00	Peak	H	-	-	-68.23	12.48	51.25	68.23	-16.98
* 15780.00	Average	H	-	-	-81.36	18.09	43.73	53.98	-10.25
* 15780.00	Peak	H	-	-	-71.02	18.09	54.06	73.98	-19.92

Table 7-141. Radiated Measurements SDM Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 155 of 267

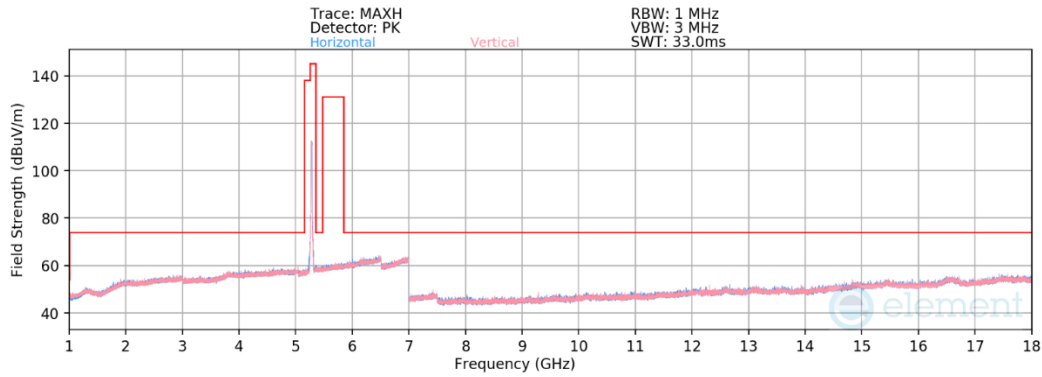

Plot 7-136. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11n – Ch. 56)

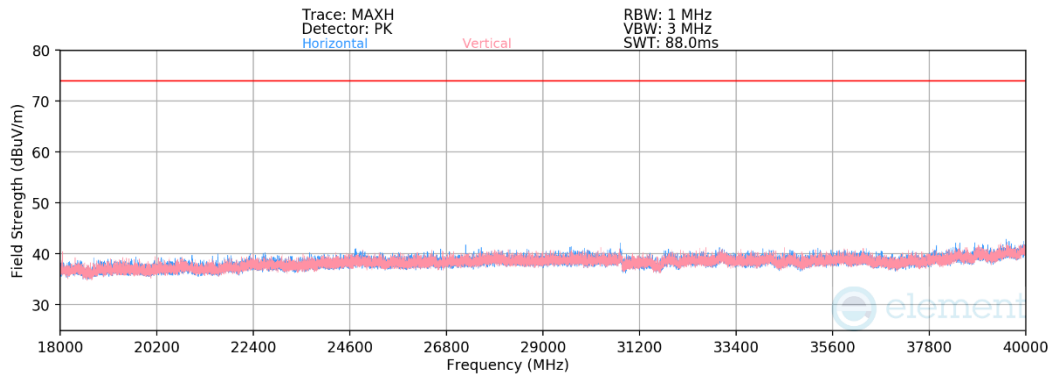


Plot 7-137. Radiated Spurious Emissions 18 GHz - 40 GHz SDM Diversity (802.11n – Ch.56)

Mode: 802.11n
 Data Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5280 MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10560.00	Peak	H	-	-	-69.51	13.18	0.00	50.67	68.23	-17.56
* 15840.00	Average	H	-	-	-81.39	18.41	0.00	44.02	53.98	-9.96
* 15840.00	Peak	H	-	-	-70.55	18.41	0.00	54.86	73.98	-19.12
* 21120.00	Average	H	-	-	-63.10	-6.08	-9.54	28.28	53.98	-25.70
* 21120.00	Peak	H	-	-	-52.18	-6.08	-9.54	39.21	73.98	-34.77
26400.00	Peak	V	-	-	-53.31	-4.01	-9.54	40.14	68.23	-28.09
* 31680.00	Average	V	-	-	-67.47	-2.66	-9.54	27.33	53.98	-26.65
* 31680.00	Peak	V	-	-	-57.47	-2.66	-9.54	37.33	73.98	-36.65
36960.00	Peak	H	-	-	-53.89	-4.80	-9.54	38.78	68.23	-29.45

Table 7-142. Radiated Measurements SDM Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 156 of 267

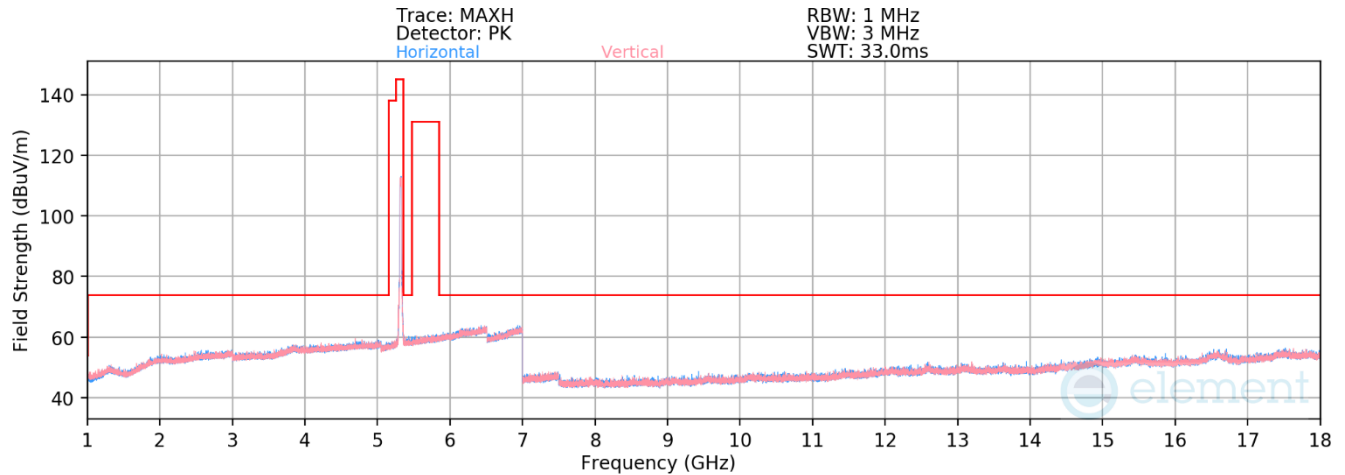


Plot 7-138. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11n – Ch. 64)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5320 MHz
Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	V	-	-	-80.16	12.59	39.43	53.98	-14.55
* 10640.00	Peak	V	-	-	-69.48	12.59	50.11	73.98	-23.87
* 15960.00	Average	V	-	-	-81.55	18.35	43.80	53.98	-10.18
* 15960.00	Peak	V	-	-	-70.07	18.35	55.28	73.98	-18.70

Table 7-143. Radiated Measurements SDM Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 157 of 267

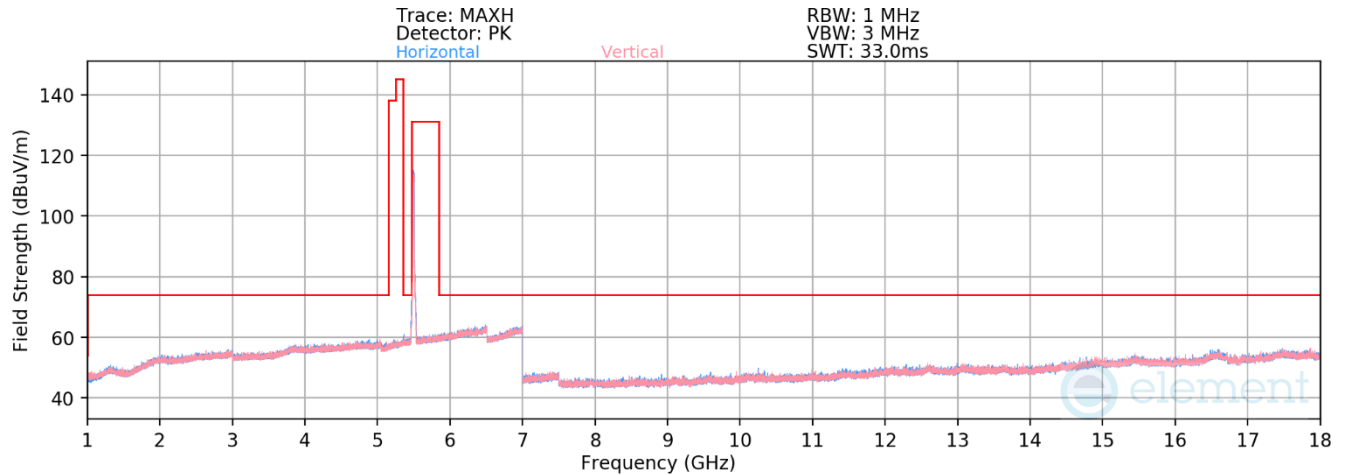


Plot 7-139. Radiated Spurious Emissions above 1 GHz CDD Diversity (802.11n – Ch. 100)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5500 MHz
Channel: 100


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11000.00	Average	V	-	-	-80.54	13.17	39.63	53.98	-14.35
* 11000.00	Peak	V	-	-	-68.96	13.17	51.21	73.98	-22.77
16500.00	Peak	H	-	-	-70.71	19.58	55.86	68.23	-12.37

Table 7-144. Radiated Measurements CDD Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 158 of 267

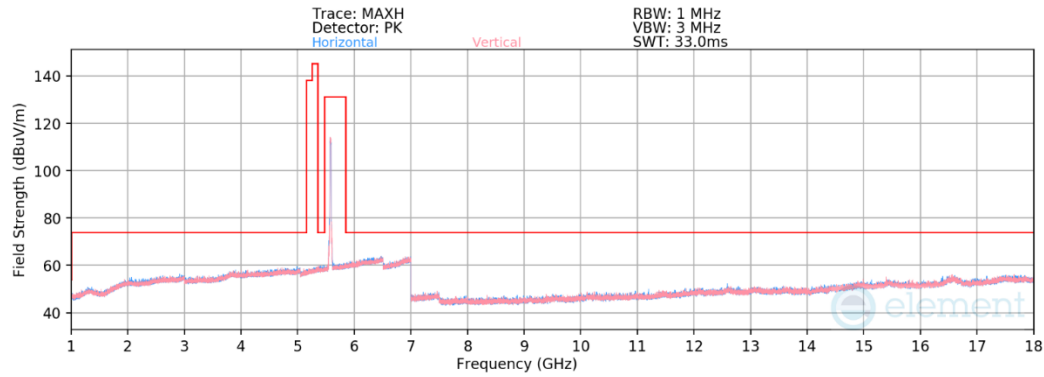

Plot 7-140. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11n – Ch. 116)

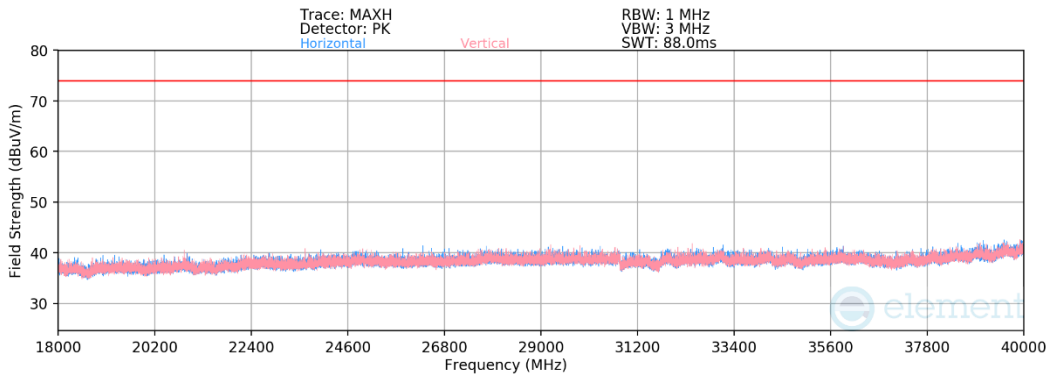


Plot 7-141. Radiated Spurious Emissions 18 GHz - 40 GHz SDM Diversity (802.11n – Ch.116)

Mode: 802.11n
 Data Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5580 MHz
 Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11160.00	Average	V	-	-	-80.30	12.86	0.00	39.56	53.98	-14.42
* 11160.00	Peak	V	-	-	-69.42	12.86	0.00	50.43	73.98	-23.55
16740.00	Peak	H	-	-	-70.16	20.10	0.00	56.94	68.23	-11.29
* 22320.00	Average	H	-	-	-51.18	-5.49	-9.54	40.79	53.98	-13.19
* 22320.00	Peak	H	-	-	-62.88	-5.49	-9.54	29.09	73.98	-44.89
27900.00	Peak	V	-	-	-53.65	-3.02	-9.54	40.80	68.23	-27.43
33480.00	Peak	V	-	-	-52.01	-3.58	-9.54	41.87	68.23	-26.36
* 39060.00	Average	V	-	-	-74.99	-2.47	-9.54	20.00	53.98	-33.98
* 39060.00	Peak	V	-	-	-54.99	-2.47	-9.54	40.00	73.98	-33.98

Table 7-145. Radiated Measurements SDM Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 159 of 267

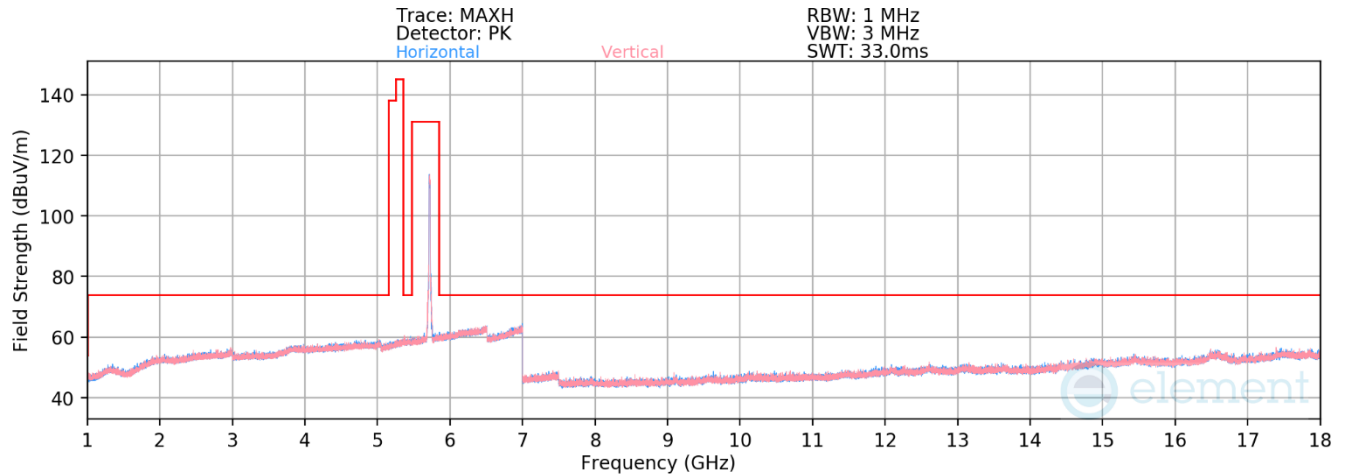


Plot 7-142. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11n – Ch. 144)

Mode:	802.11n
Data Rate:	MCS8
Distance of Measurements:	3 Meters
Operating Frequency:	5720 MHz
Channel:	144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11440.00	Average	V	-	-	-80.42	13.84	40.42	53.98	-13.56
* 11440.00	Peak	V	-	-	-70.08	13.84	50.76	73.98	-23.22
17160.00	Peak	V	-	-	-71.34	19.91	55.57	68.23	-12.66

Table 7-146. Radiated Measurements SDM Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 160 of 267

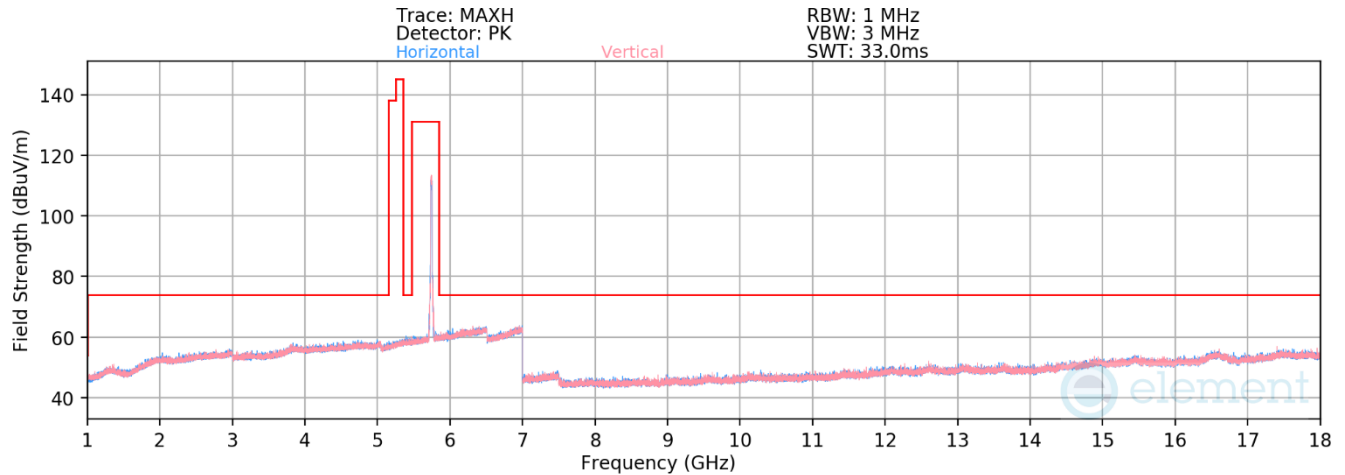


Plot 7-143. Radiated Spurious Emissions above 1 GHz CDD Diversity (802.11n – Ch. 149)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5745 MHz
Channel: 149


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	Average	H	-	-	-80.87	13.63	39.75	53.98	-14.23
* 11490.00	Peak	H	-	-	-69.54	13.63	51.08	73.98	-22.90
17235.00	Peak	V	-	-	-71.38	19.69	55.30	68.23	-12.93

Table 7-147. Radiated Measurements CDD Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 161 of 267

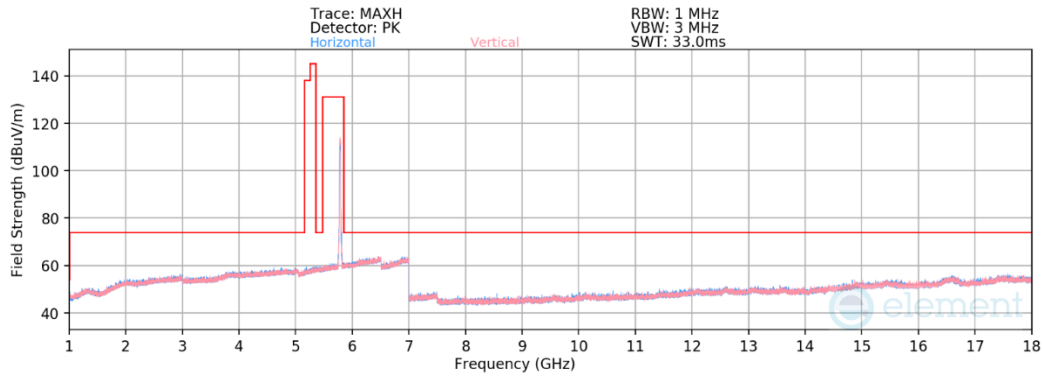

Plot 7-144. Radiated Spurious Emissions above 1 GHz CDD Diversity (802.11n – Ch.157)

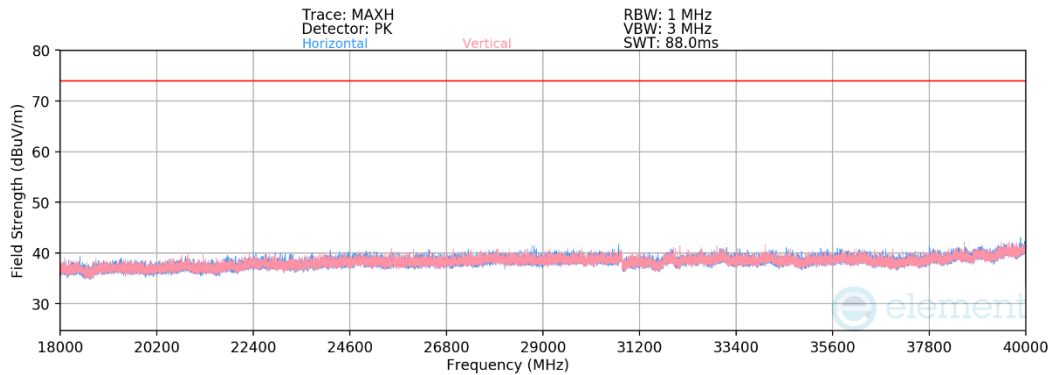


Plot 7-145. Radiated Spurious Emissions 18 GHz - 40 GHz CDD Diversity (802.11n – Ch.157)

Mode: 802.11n
 Data Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5785 MHz
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	V	-	-	-80.46	13.90	0.00	40.45	53.98	-13.53
* 11570.00	Peak	V	-	-	-68.74	13.90	0.00	52.16	73.98	-21.82
17355.00	Peak	V	-	-	-71.38	19.70	0.00	55.31	68.23	-12.92
23140.00	Peak	V	-	-	-52.28	-5.68	-9.54	39.50	68.23	-28.73
28925.00	Peak	H	-	-	-53.78	-2.88	-9.54	40.80	68.23	-27.43
34710.00	Peak	V	-	-	-51.72	-4.60	-9.54	41.15	68.23	-27.08

Table 7-148. Radiated Measurements CDD Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 162 of 267

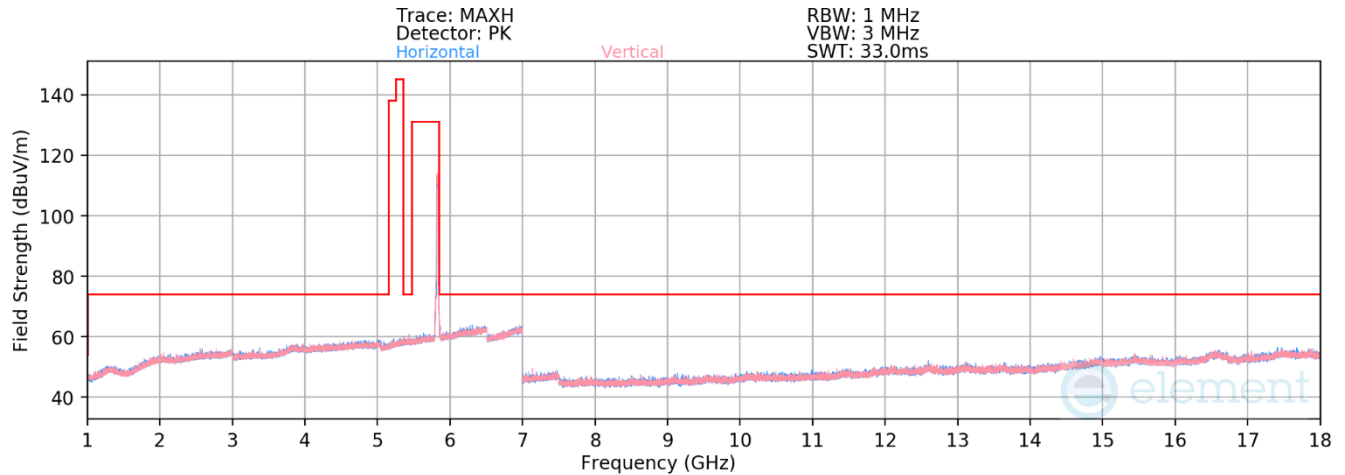


Plot 7-146. Radiated Spurious Emissions above 1 GHz CDD Diversity (802.11n – Ch. 165)

Mode:	802.11n
Data Rate:	MCS8
Distance of Measurements:	3 Meters
Operating Frequency:	5825 MHz
Channel:	165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	V	-	-	-80.54	13.63	40.09	53.98	-13.89
* 11650.00	Peak	V	-	-	-69.31	13.63	51.33	73.98	-22.65
17475.00	Peak	V	-	-	-71.31	20.79	56.49	68.23	-11.74

Table 7-149. Radiated Measurements CDD Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 163 of 267

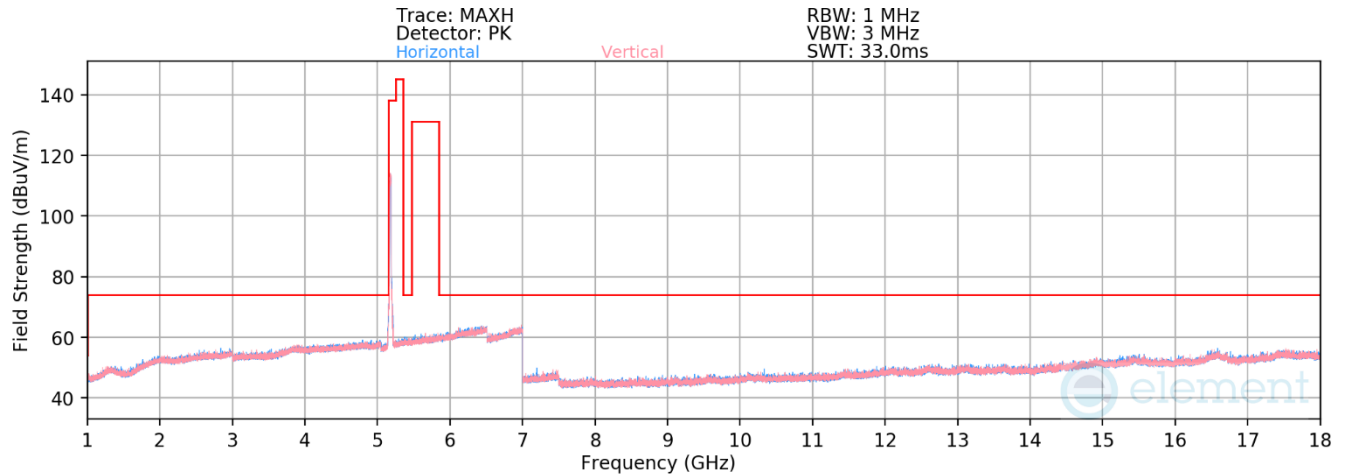


Plot 7-147. Radiated Spurious Emissions above 1 GHz CDD Diversity (802.11be(SU) – Ch. 36)

Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5180 MHz
Channel: 36


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10360.00	Peak	V	-	-	-68.98	11.69	49.71	68.23	-18.52
* 15540.00	Average	H	-	-	-81.00	18.15	44.15	53.98	-9.83
* 15540.00	Peak	H	-	-	-70.41	18.15	54.74	73.98	-19.24

Table 7-150. Radiated Measurements CDD Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 164 of 267

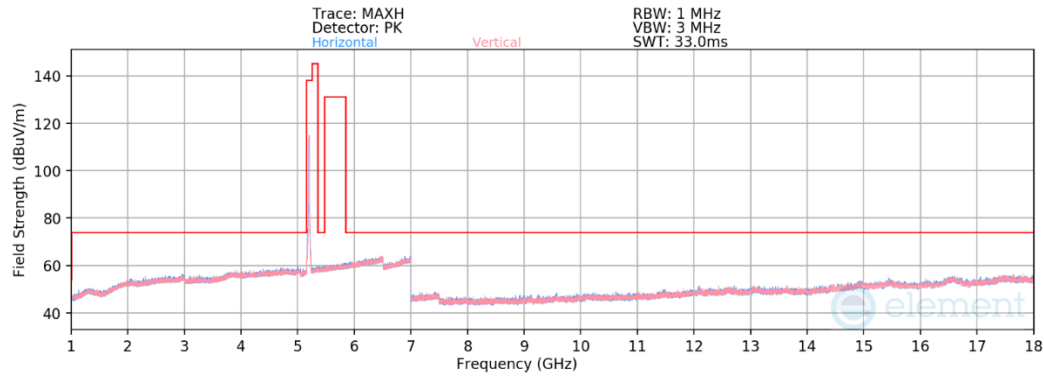

Plot 7-148. Radiated Spurious Emissions above 1 GHz CDD Diversity (802.11be(SU) – Ch. 40)

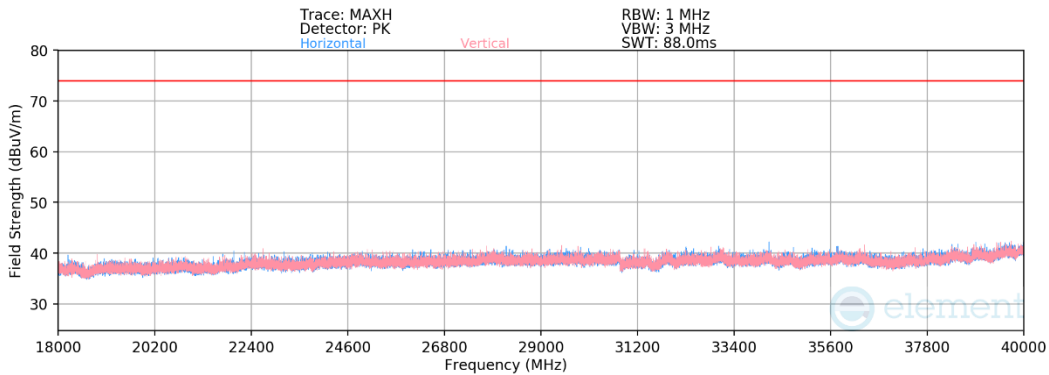


Plot 7-149. Radiated Spurious Emissions 18 GHz - 40 GHz CDD Diversity (802.11be(SU) – Ch.40)

Mode: 802.11be(SU)
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5200 MHz
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10400.00	Peak	V	-	-	-68.96	11.91	0.00	49.95	68.23	-18.28
* 15600.00	Average	H	-	-	-81.36	18.75	0.00	44.40	53.98	-9.58
* 15600.00	Peak	H	-	-	-71.28	18.75	0.00	54.48	73.98	-19.50
* 20800.00	Average	V	-	-	-63.14	-5.87	-9.54	28.45	53.98	-25.53
* 20800.00	Peak	V	-	-	-51.34	-5.87	-9.54	40.25	73.98	-33.73
26000.00	Peak	V	-	-	-52.57	-4.40	-9.54	40.50	68.23	-27.73
* 31200.00	Average	V	-	-	-66.37	-2.74	-9.54	28.36	53.98	-25.62
* 31200.00	Peak	V	-	-	-56.37	-2.70	-9.54	38.40	73.98	-35.58
36400.00	Peak	V	-	-	-53.43	-4.89	-9.54	39.14	68.23	-29.09

Table 7-151. Radiated Measurements CDD Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 165 of 267

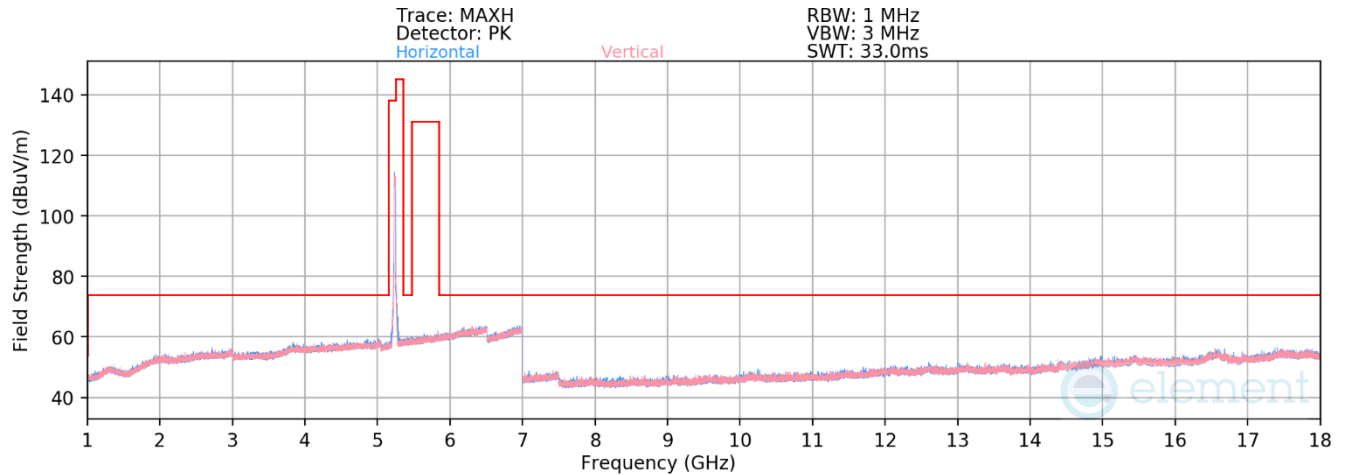


Plot 7-150. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be(SU) – Ch. 48)

Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5240 MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10480.00	Peak	V	-	-	-69.05	12.29	50.24	68.23	-17.99
* 15720.00	Average	H	-	-	-81.41	18.53	44.12	53.98	-9.86
* 15720.00	Peak	H	-	-	-71.06	18.53	54.47	73.98	-19.51

Table 7-152. Radiated Measurements SDM Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 166 of 267

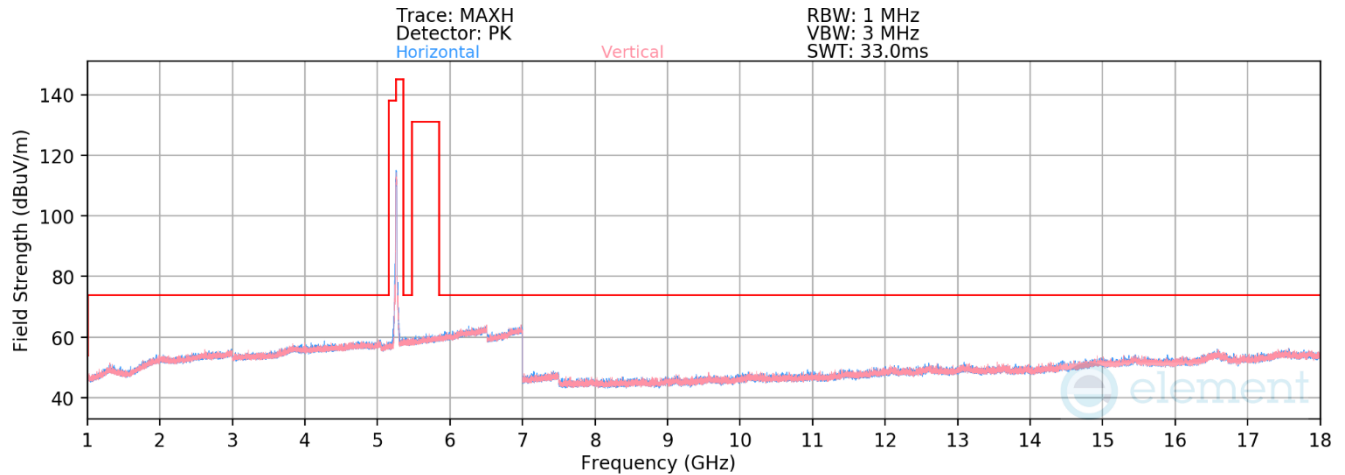


Plot 7-151. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be(SU) – Ch. 52)

Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5260 MHz
Channel: 52


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10520.00	Peak	V	-	-	-68.57	12.54	50.97	68.23	-17.26
* 15780.00	Average	H	-	-	-81.21	18.10	43.89	53.98	-10.09
* 15780.00	Peak	H	-	-	-70.19	18.10	54.91	73.98	-19.07

Table 7-153. Radiated Measurements SDM Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 167 of 267

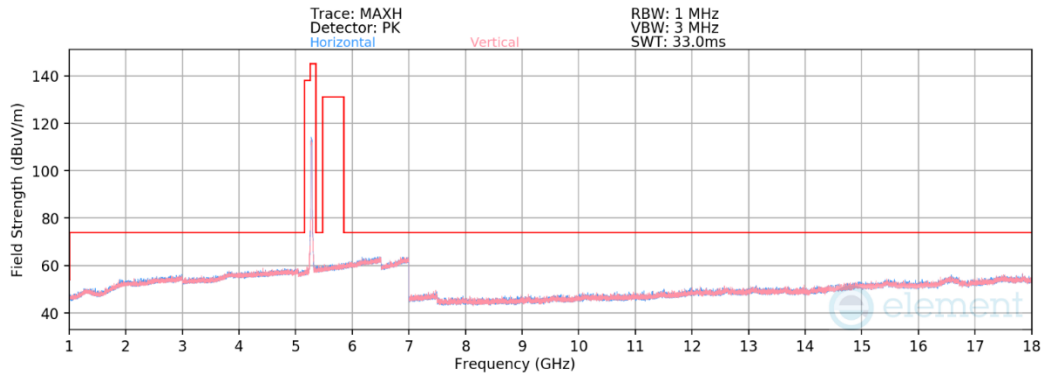

Plot 7-152. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be(SU) – Ch. 56)

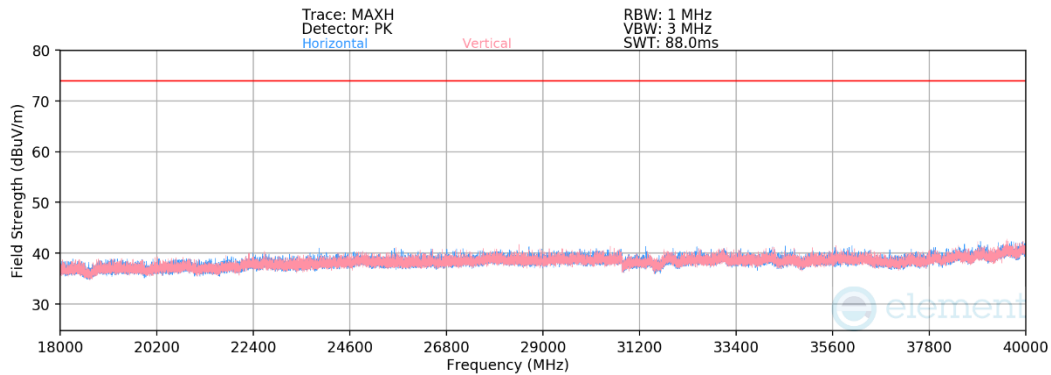


Plot 7-153. Radiated Spurious Emissions 18 GHz - 40 GHz SDM Diversity (802.11be(SU) – Ch.56)

Mode: 802.11be(SU)
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5280 MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	V	-	-	-69.68	12.79	0.00	50.11	68.23	-18.12
* 15840.00	Average	H	-	-	-81.42	18.32	0.00	43.90	53.98	-10.08
* 15840.00	Peak	H	-	-	-70.87	18.32	0.00	54.45	73.98	-19.53
* 21120.00	Average	H	-	-	-62.97	-6.08	-9.54	28.41	53.98	-25.57
* 21120.00	Peak	H	-	-	-51.86	-6.08	-9.54	39.53	73.98	-34.45
26400.00	Peak	V	-	-	-53.44	-4.01	-9.54	40.02	68.23	-28.21
* 31680.00	Average	V	-	-	-66.88	-2.66	-9.54	27.92	53.98	-26.06
* 31680.00	Peak	V	-	-	-56.88	-2.66	-9.54	37.92	73.98	-36.06
36960.00	Peak	V	-	-	-53.68	-4.80	-9.54	38.98	68.23	-29.25

Table 7-154. Radiated Measurements SDM Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 168 of 267

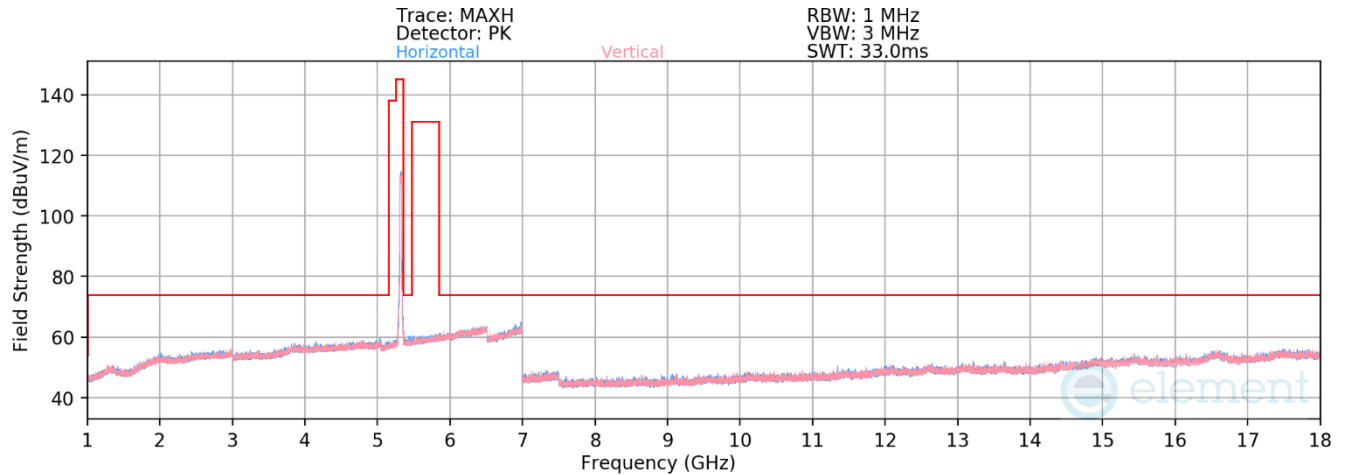


Plot 7-154. Radiated Spurious Emissions above 1 GHz CDD Diversity (802.11be(SU) – Ch. 64)

Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5320 MHz
Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 10640.00	Average	V	-	-	-80.58	13.09	39.51	53.98	-14.47
* 10640.00	Peak	V	-	-	-69.48	13.09	50.61	73.98	-23.37
* 15960.00	Average	H	-	-	-81.54	18.26	43.72	53.98	-10.26
* 15960.00	Peak	H	-	-	-70.79	18.26	54.47	73.98	-19.51

Table 7-155. Radiated Measurements CDD Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 169 of 267

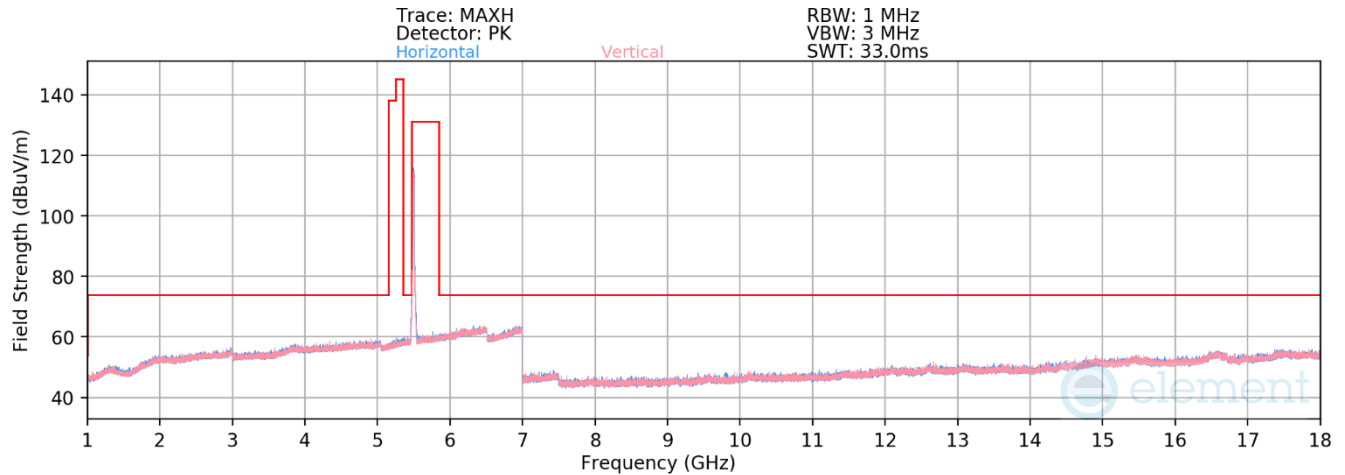


Plot 7-155. Radiated Spurious Emissions above 1 GHz CDD Diversity (802.11be(SU) – Ch. 100)

Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5500 MHz
Channel: 100


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11000.00	Average	V	-	-	-80.55	13.21	39.65	53.98	-14.33
* 11000.00	Peak	V	-	-	-69.09	13.21	51.11	73.98	-22.87
16500.00	Peak	H	-	-	-70.55	19.37	55.82	68.23	-12.41

Table 7-156. Radiated Measurements CDD Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 170 of 267

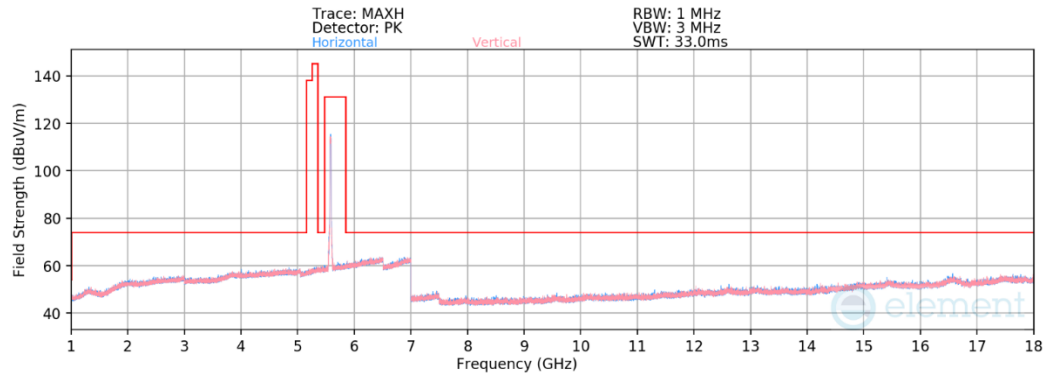

Plot 7-156. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be(SU) – Ch. 116)

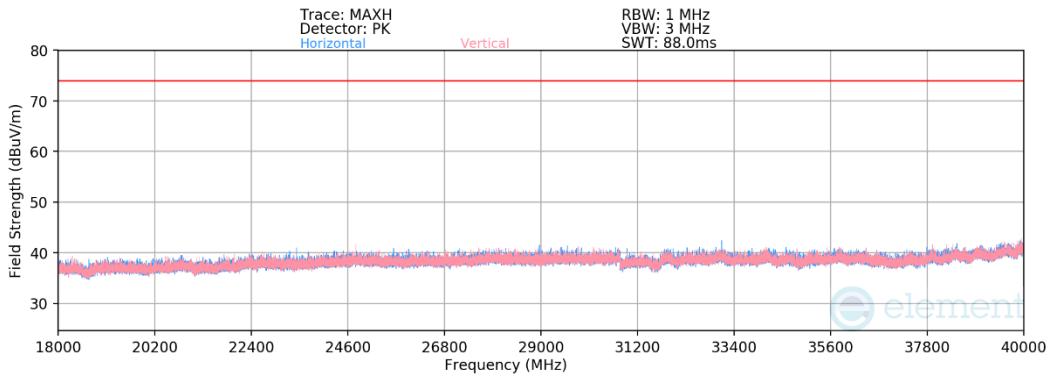


Plot 7-157. Radiated Spurious Emissions 18 GHz - 40 GHz SDM Diversity (802.11be(SU) – Ch.116)

Mode: 802.11be(SU)
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5580 MHz
 Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	Average	V	-	-	-80.36	12.91	0.00	39.56	53.98	-14.42
* 11160.00	Peak	V	-	-	-68.86	12.91	0.00	51.05	73.98	-22.93
16740.00	Peak	V	-	-	-70.88	19.99	0.00	56.11	68.23	-12.12
* 22320.00	Average	H	-	-	-62.77	-5.49	-9.54	29.20	53.98	-24.78
* 22320.00	Peak	H	-	-	-51.65	-5.49	-9.54	40.32	73.98	-33.66
27900.00	Peak	H	-	-	-53.53	-3.02	-9.54	40.91	68.23	-27.32
33480.00	Peak	H	-	-	-52.44	-3.63	-9.54	41.39	68.23	-26.84
39060.00	Average	V	-	-	-74.51	-2.47	-9.54	20.47	68.20	-47.73
39060.00	Peak	V	-	-	-54.51	-2.47	-9.54	40.47	68.23	-27.76

Table 7-157. Radiated Measurements SDM Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 171 of 267

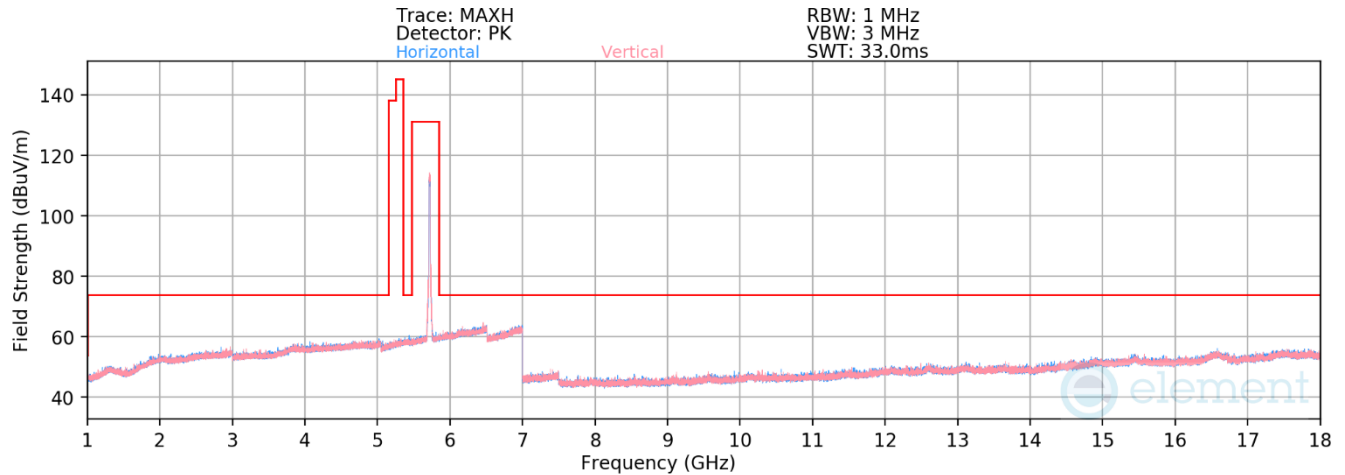


Plot 7-158. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be(SU) – Ch. 144)

Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5720 MHz
Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11440.00	Average	H	-	-	-80.85	13.92	40.06	53.98	-13.92
* 11440.00	Peak	H	-	-	-69.98	13.92	50.94	73.98	-23.04
17160.00	Peak	H	-	-	-71.42	19.82	55.40	68.23	-12.83

Table 7-158. Radiated Measurements SDM Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 172 of 267

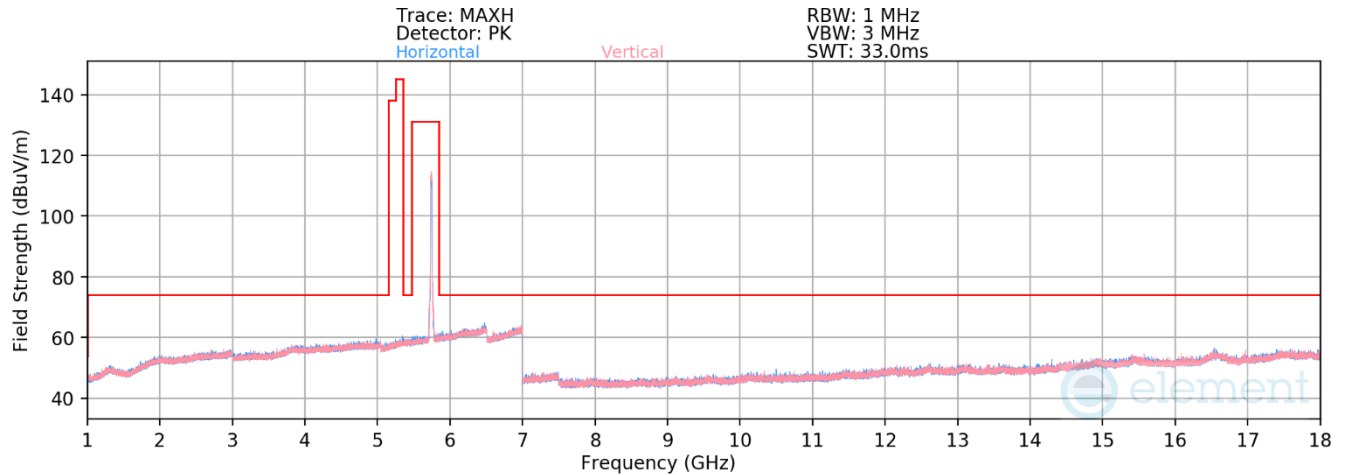


Plot 7-159. Radiated Spurious Emissions above 1 GHz CDD Diversity (802.11be(SU) – Ch. 149)

Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5745 MHz
Channel: 149


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11490.00	Average	V	-	-	-80.84	13.63	39.79	53.98	-14.19
* 11490.00	Peak	V	-	-	-69.61	13.63	51.01	73.98	-22.97
17235.00	Peak	H	-	-	-70.69	19.69	56.00	68.23	-12.23

Table 7-159. Radiated Measurements CDD Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 173 of 267

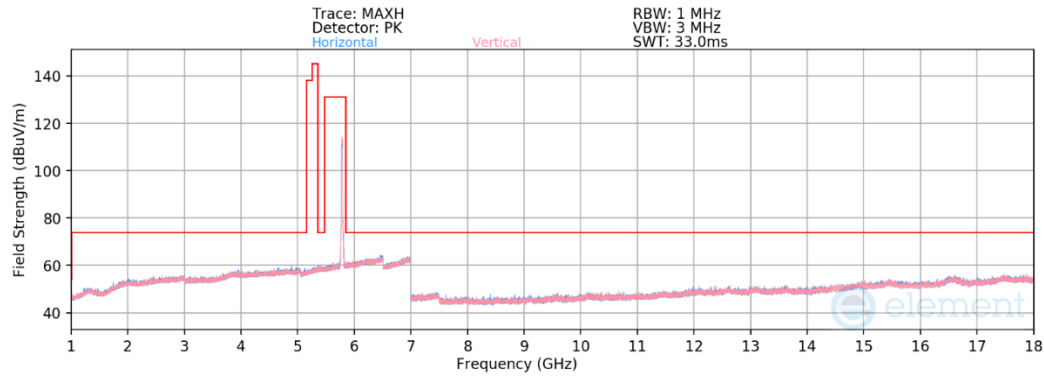

Plot 7-160. Radiated Spurious Emissions above 1 GHz CDD Diversity (802.11be(SU) – Ch. 157)

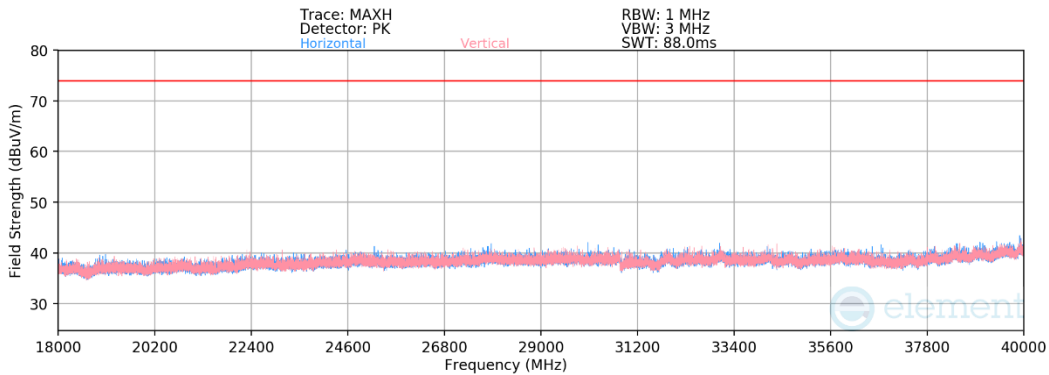


Plot 7-161. Radiated Spurious Emissions 18 GHz - 40 GHz CDD Diversity (802.11be(SU) – Ch.157)

Mode:	802.11be(SU)
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5785 MHz
Channel:	157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11570.00	Average	V	-	-	-80.73	13.89	0.00	40.17	53.98	-13.81
* 11570.00	Peak	V	-	-	-69.54	13.89	0.00	51.35	73.98	-22.63
17355.00	Peak	V	-	-	-71.36	19.79	0.00	55.43	68.23	-12.80
23140.00	Peak	V	-	-	-52.24	-5.65	-9.54	39.57	68.23	-28.66
28925.00	Peak	V	-	-	-54.15	-2.88	-9.54	40.43	68.23	-27.80
34710.00	Peak	H	-	-	-51.54	-4.60	-9.54	41.33	68.23	-26.90

Table 7-160. Radiated Measurements CDD Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 174 of 267

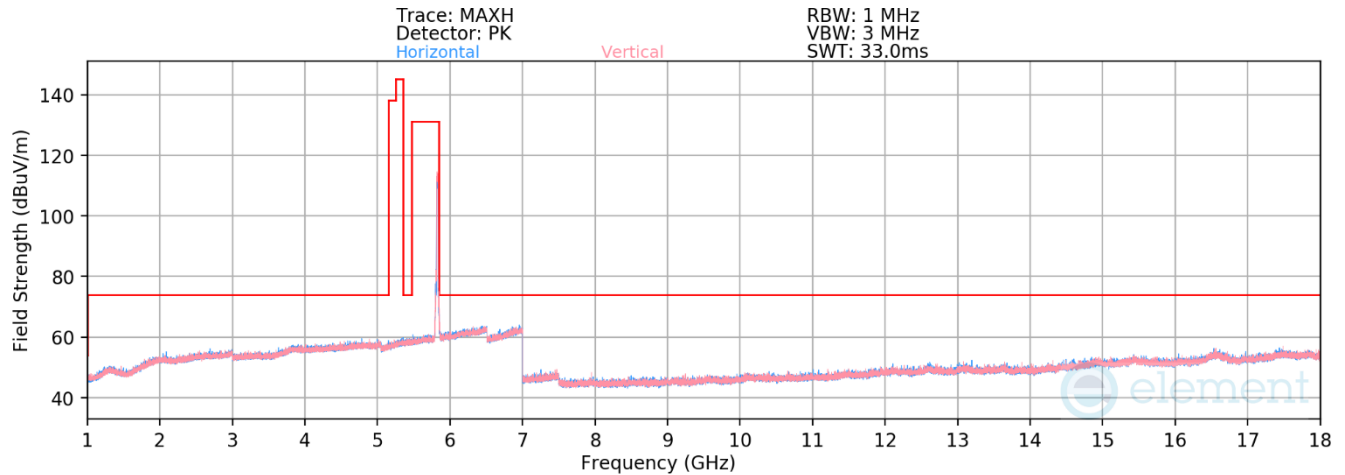

Plot 7-162. Radiated Spurious Emissions above 1 GHz CDD Diversity (802.11be(SU) – Ch. 165)

Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5825 MHz
Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11650.00	Average	H	-	-	-80.43	13.59	40.16	53.98	-13.82
* 11650.00	Peak	H	-	-	-69.87	13.59	50.72	73.98	-23.26
17475.00	Peak	V	-	-	-71.15	19.90	55.75	68.23	-12.48


Table 7-161. Radiated Measurements CDD Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 175 of 267


7.6.3 Simultaneous Tx Radiated Spurious Emission (1 – 18 GHz)

Description	Bluetooth	UNII
Antenna	Antenna WF8	Antenna WF8
Channel	78	36
Operating Frequency (MHz)	2480	5180
Mode/Modulation	GFSK ePA	802.11be(SU)

Table 7-162. Worst Case Simultaneous Transmission Configuration

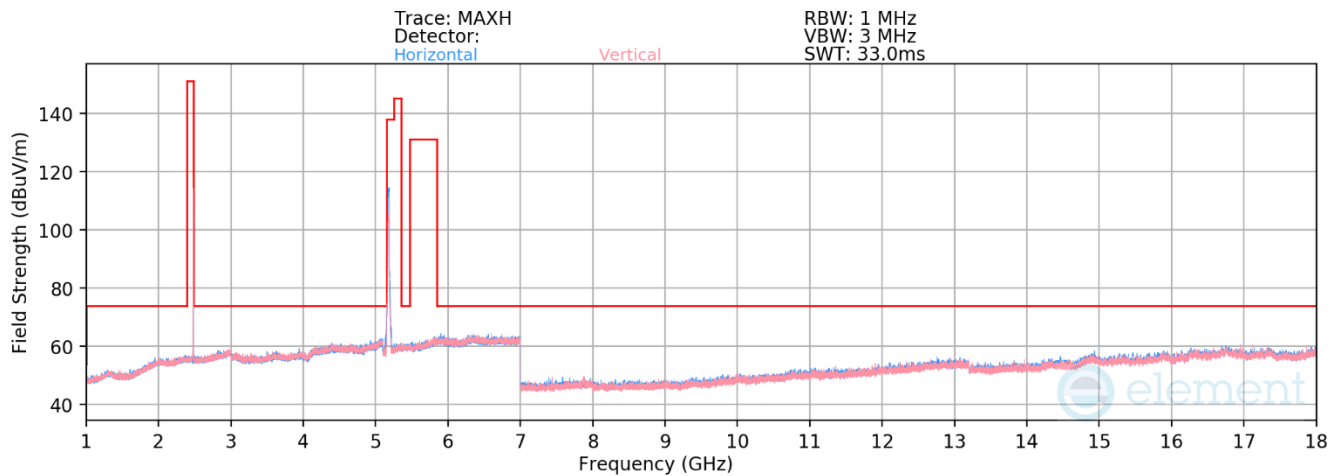

Plot 7-163. Radiated Spurious Emissions above 1 GHz – Simultaneous Transmission

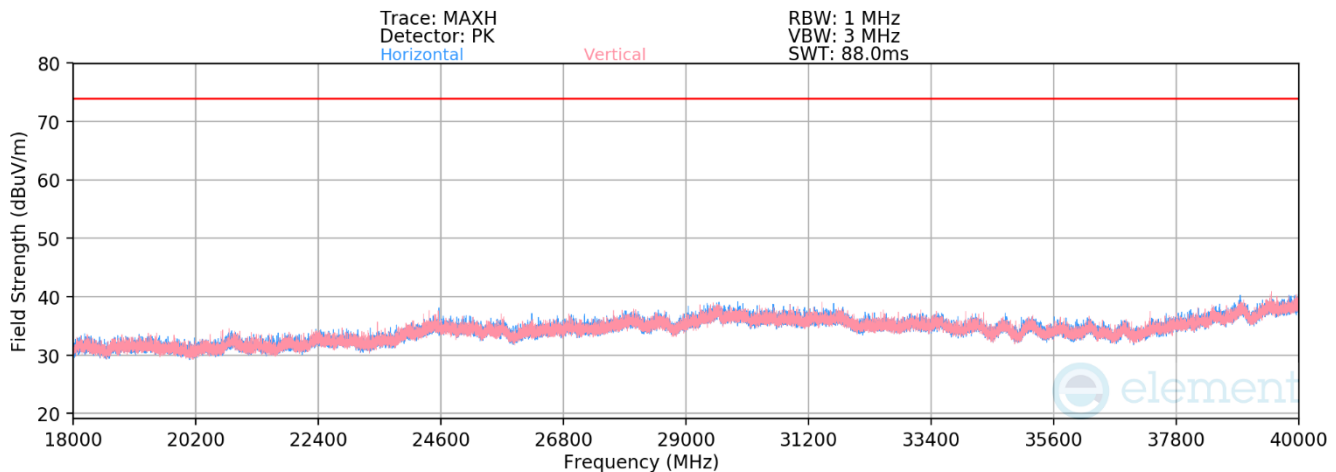

Plot 7-164. Radiated Spurious Emissions above 18 GHz – Simultaneous Transmission

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 4960.00	Peak	-	-	-	-71.84	17.36	52.52	73.98	-21.46
* 7440.00	Peak	V	118	178	-69.50	11.58	26.58	73.98	-47.40
* 12400.00	Peak	-	-	-	-75.25	18.99	50.74	73.98	-23.24

Table 7-163. Bluetooth Emissions Measurement - Simultaneous Transmission

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 176 of 267


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	Avg	-	-	-	-84.06	15.20	38.14	68.23	-30.09
* 15540.00	Avg	-	-	-	-85.60	23.09	44.49	53.98	-9.49
* 15540.00	Peak	-	-	-	-75.26	23.09	54.83	73.98	-19.15

Table 7-164. UNII Emissions Measurement - Simultaneous Transmission


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 177 of 267

V 12.0 03/03/2026


7.6.4 Antenna WF5T Radiated Band Edge Measurements (20 MHz BW)

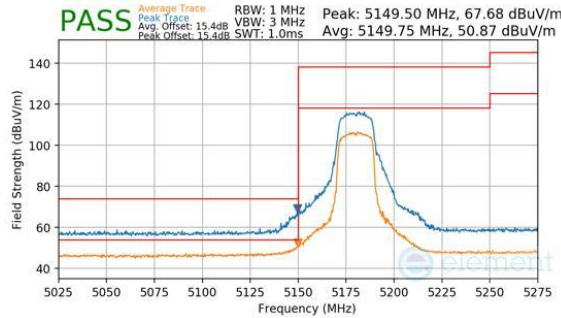


Plot 7-165. Antenna WF5T (Peak & Average, Ch.36, 802.11n, MCS7)

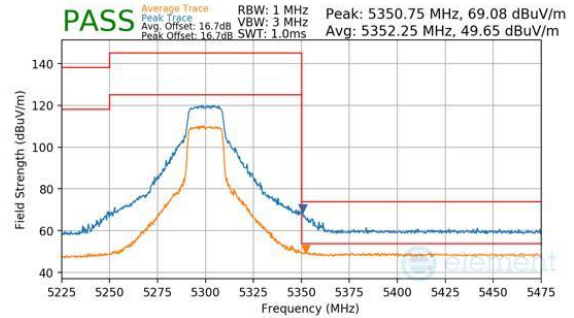


Plot 7-168. Antenna WF5T (Peak & Average, Ch.60, 802.11n, MCS7)

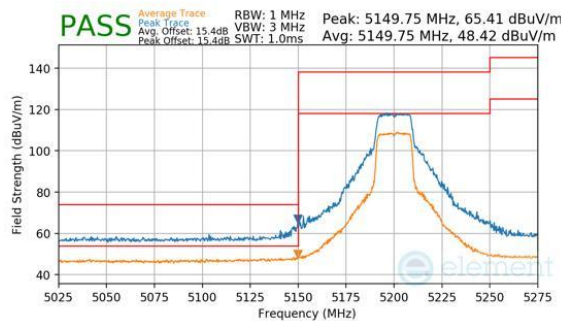


Plot 7-166. Antenna WF5T (Peak & Average, Ch.40, 802.11n, MCS7)

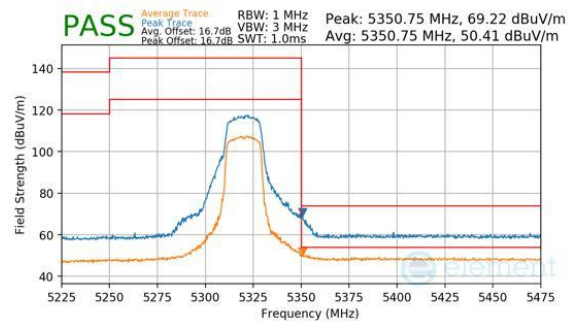

Plot 7-169. Antenna WF5T (Peak & Average, Ch.64, 802.11n, MCS7)

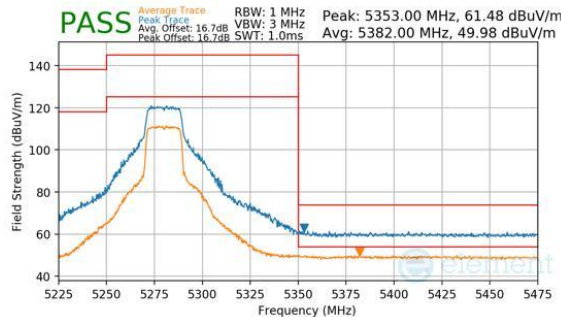


Plot 7-167. Antenna WF5T (Peak & Average, Ch.56, 802.11n, MCS7)

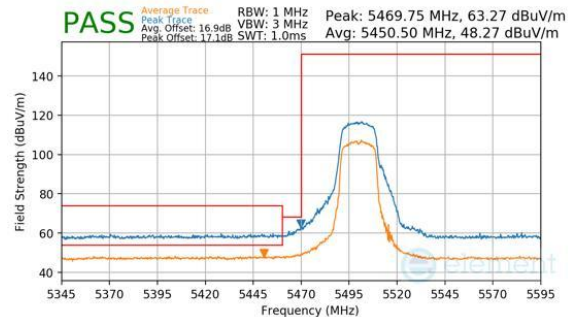


Plot 7-170. Antenna WF5T (Peak & Average, Ch.100, 802.11n, MCS7)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 178 of 267

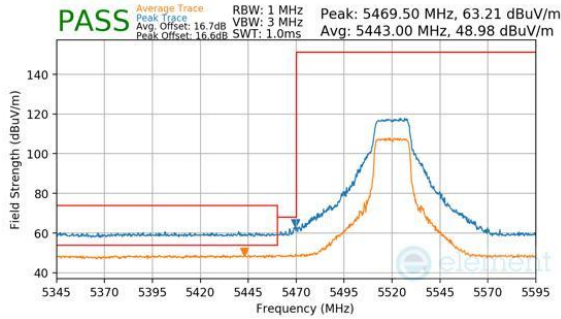


Plot 7-171. Antenna WF5T (Peak & Average, Ch.104, 802.11n, MCS7)

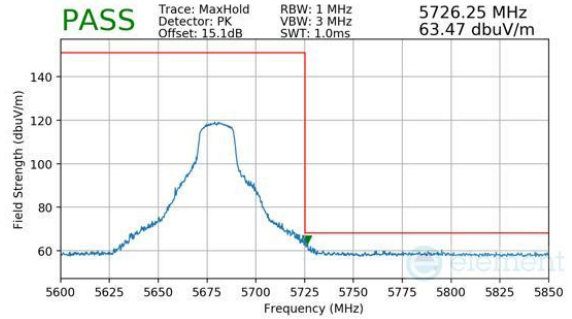


Plot 7-174. Antenna WF5T (Peak, Ch.136, 802.11n, MCS7)

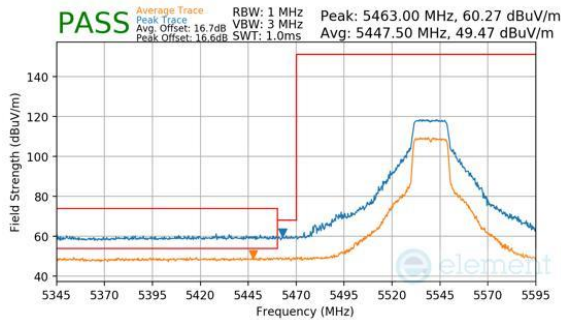


Plot 7-172. Antenna WF5T (Peak & Average, Ch.108, 802.11n, MCS7)

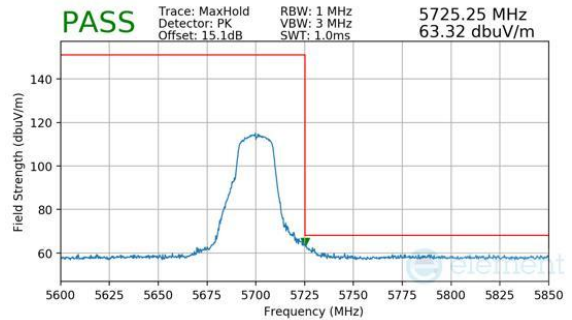

Plot 7-175. Antenna WF5T (Peak, Ch.140, 802.11n, MCS7)

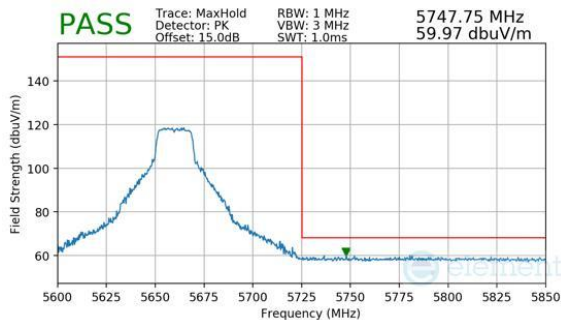


Plot 7-173. Antenna WF5T (Peak, Ch.132, 802.11n, MCS7)

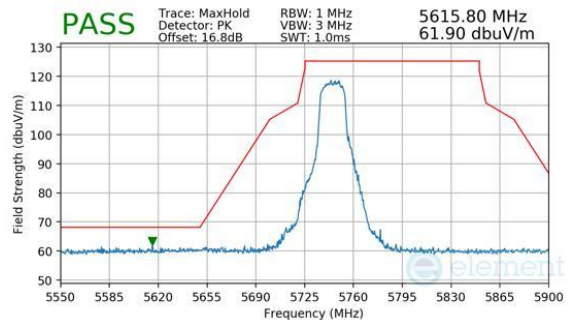


Plot 7-176. Antenna WF5T (Peak, Ch.149, 802.11n, MCS7)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 179 of 267

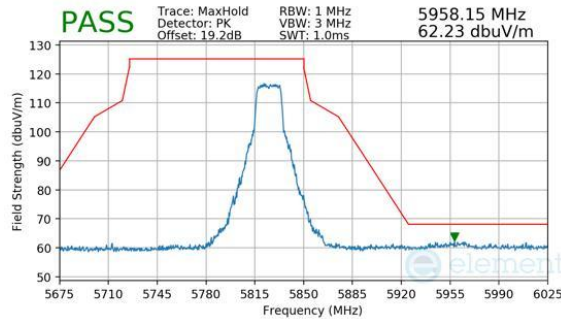


Plot 7-177. Antenna WF5T (Peak, Ch.165, 802.11n, MCS7)

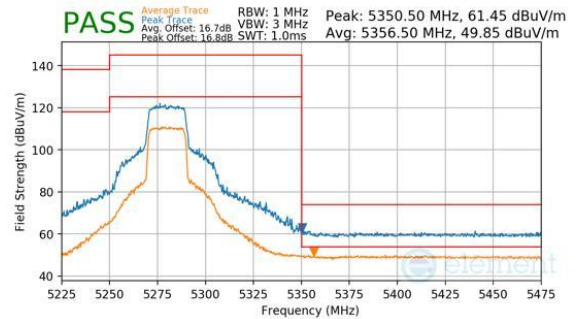


Plot 7-180. Antenna WF5T (Peak & Average, Ch.56, 802.11be(SU), MCS11)

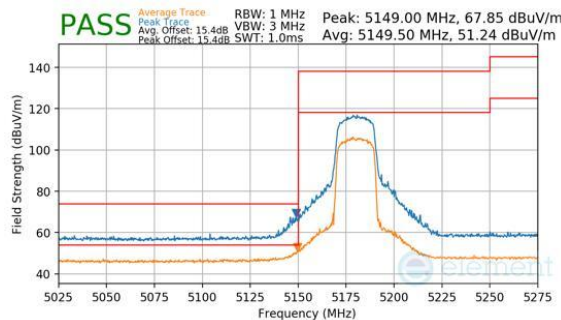


Plot 7-178. Antenna WF5T (Peak & Average, Ch.36, 802.11be(SU), MCS11)

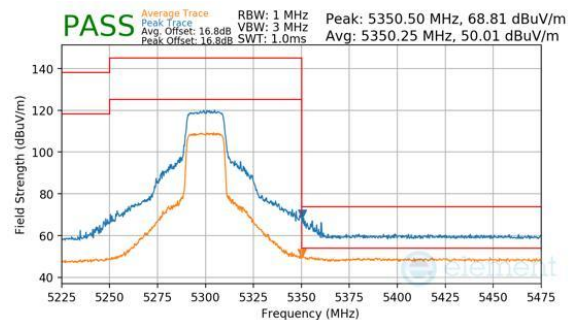

Plot 7-181. Antenna WF5T (Peak & Average, Ch.60, 802.11be(SU), MCS11)

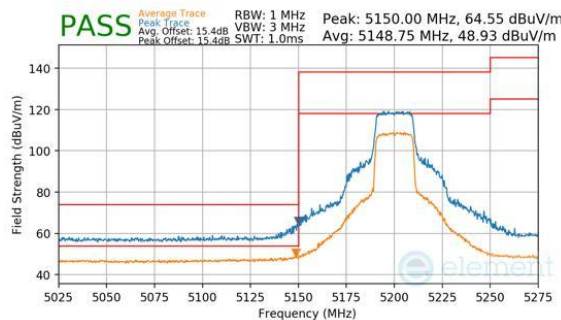


Plot 7-179. Antenna WF5T (Peak & Average, Ch.40, 802.11be(SU), MCS11)

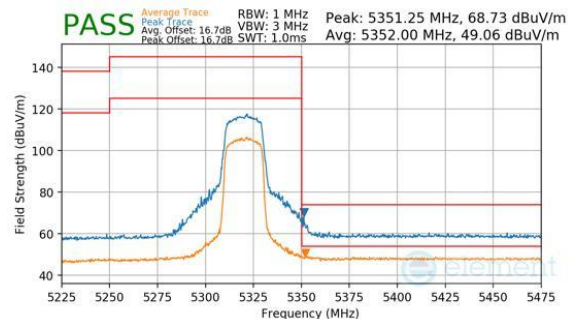


Plot 7-182. Antenna WF5T (Peak & Average, Ch.64, 802.11be(SU), MCS11)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 180 of 267

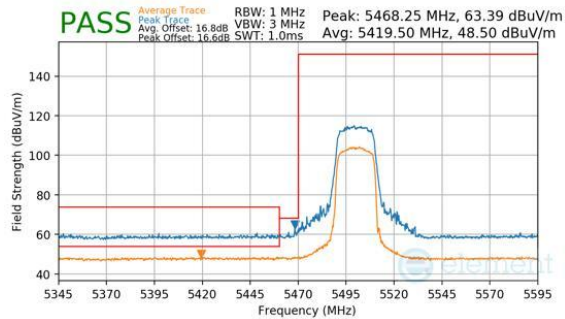


Plot 7-183. Antenna WF5T (Peak & Average, Ch.100, 802.11be(SU), MCS11)

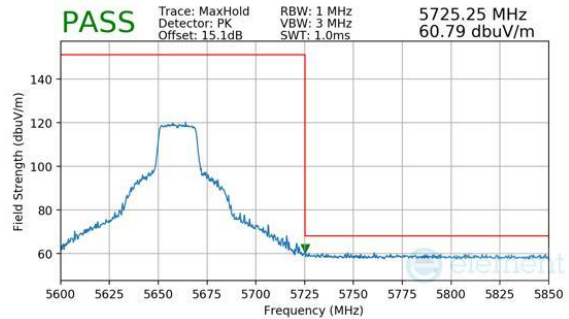


Plot 7-186. Antenna WF5T (Peak, Ch.132, 802.11be(SU), MCS11)

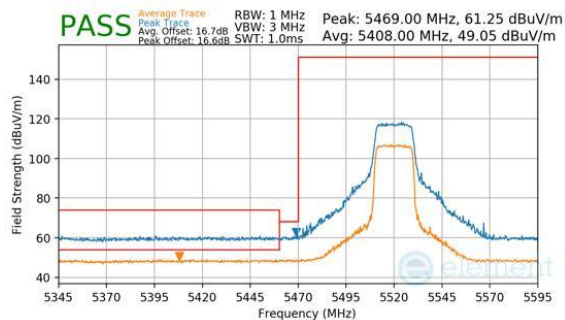


Plot 7-184. Antenna WF5T (Peak & Average, Ch.104, 802.11be(SU), MCS11)

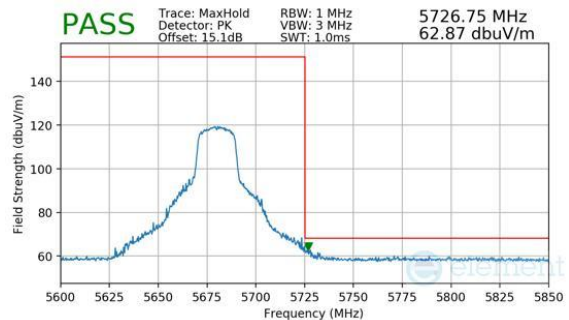

Plot 7-187. Antenna WF5T (Peak, Ch.136, 802.11be(SU), MCS11)

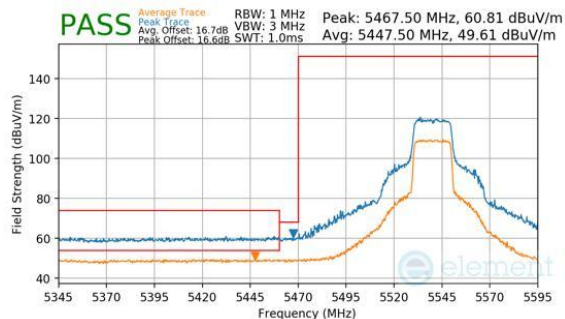


Plot 7-185. Antenna WF5T (Peak & Average, Ch.108, 802.11be(SU), MCS11)

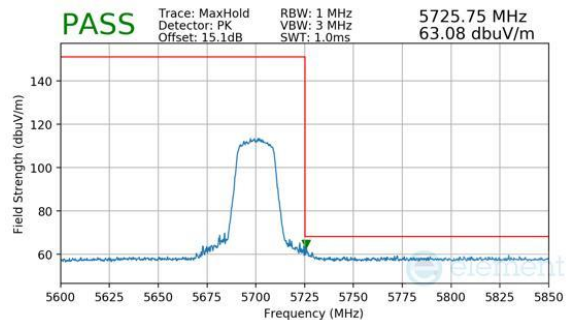


Plot 7-188. Antenna WF5T (Peak, Ch.140, 802.11be(SU), MCS11)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 181 of 267

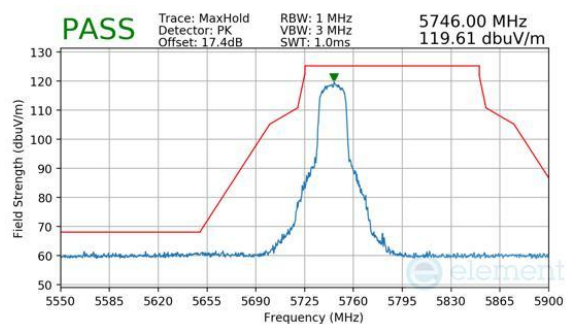


Plot 7-189. Antenna WF5T (Peak, Ch.149, 802.11be(SU), MCS11)

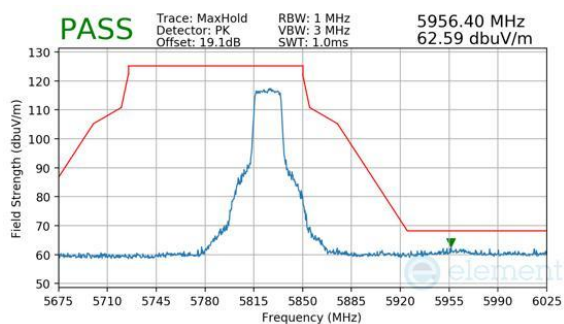


Plot 7-190. Antenna WF5T (Peak, Ch.165, 802.11be(SU), MCS11)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 182 of 267


7.6.5 Antenna WF5T Radiated Band Edge Measurements (40 MHz BW)

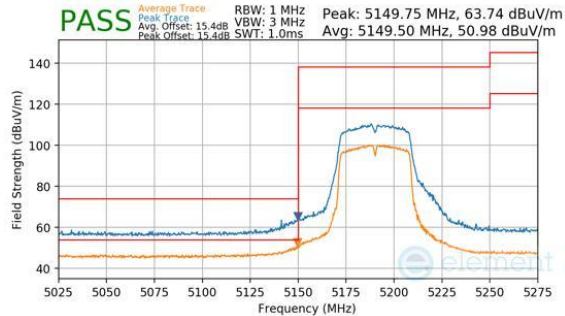


Plot 7-191. Antenna WF5T (Peak & Average, Ch.38, 802.11n, MCS7)

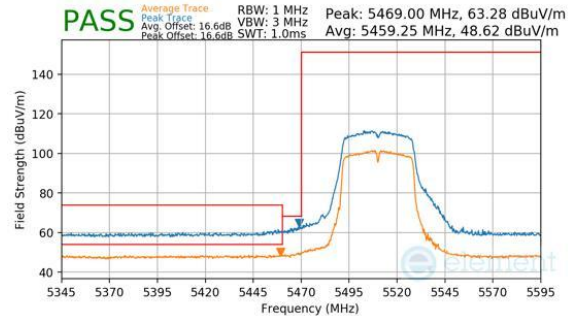


Plot 7-194. Antenna WF5T (Peak & Average, Ch.102, 802.11n, MCS7)

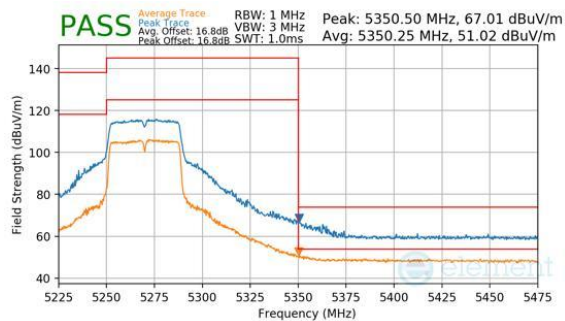


Plot 7-192. Antenna WF5T (Peak & Average, Ch.54, 802.11n, MCS7)

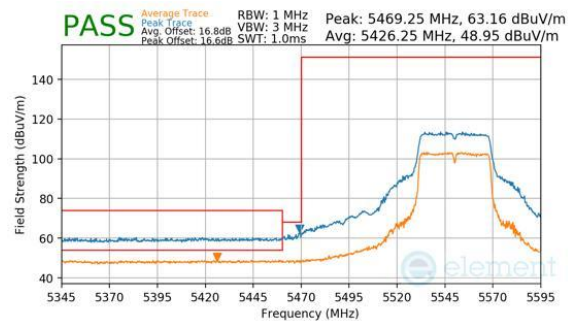

Plot 7-195. Antenna WF5T (Peak & Average, Ch.110, 802.11n, MCS7)

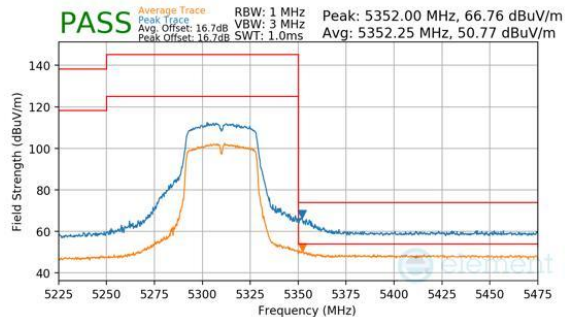


Plot 7-193. Antenna WF5T (Peak & Average, Ch.62, 802.11n, MCS7)

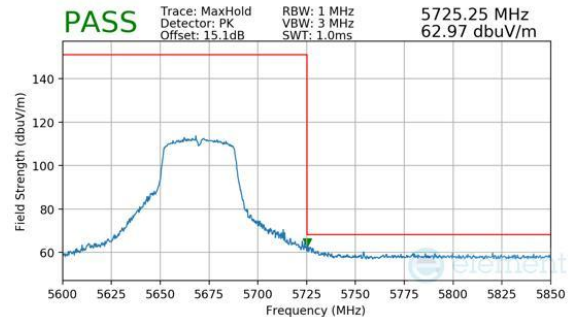


Plot 7-196. Antenna WF5T (Peak, Ch.134, 802.11n, MCS7)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 183 of 267

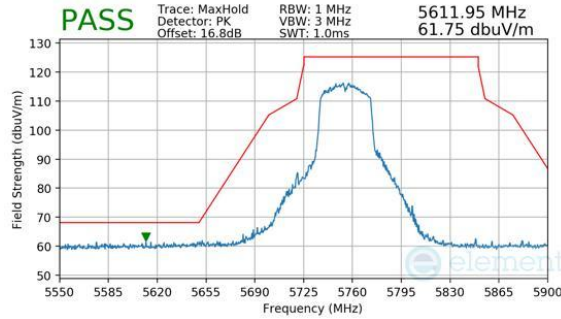


Plot 7-197. Antenna WF5T (Peak, Ch.151, 802.11n, MCS7)

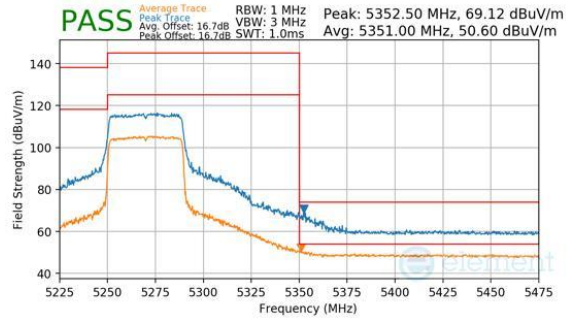


Plot 7-200. Antenna WF5T (Peak & Average, Ch.54, 802.11be(SU), MCS11)

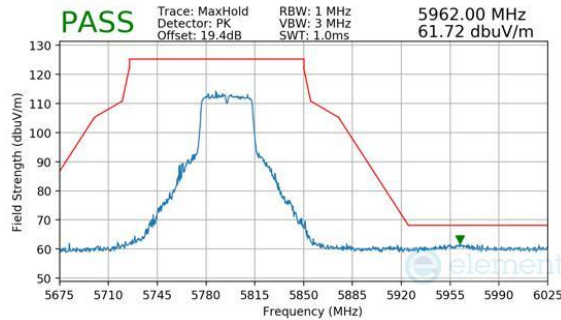


Plot 7-198. Antenna WF5T (Peak, Ch.159, 802.11n, MCS7)

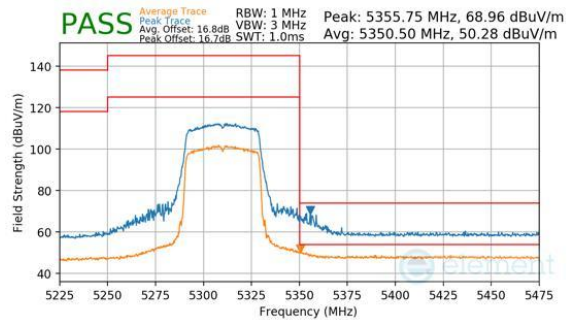

Plot 7-201. Antenna WF5T (Peak & Average, Ch.62, 802.11be(SU), MCS11)

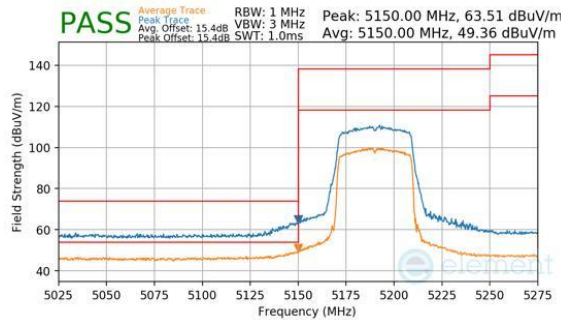


Plot 7-199. Antenna WF5T (Peak & Average, Ch.38, 802.11be(SU), MCS11)

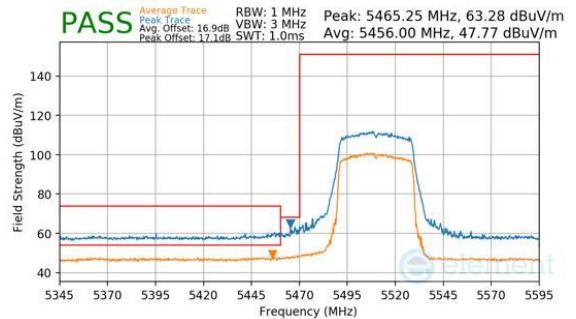


Plot 7-202. Antenna WF5T (Peak & Average, Ch.102, 802.11be(SU), MCS11)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 184 of 267

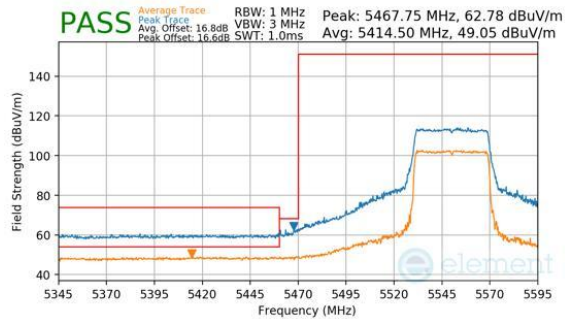


Plot 7-203. Antenna WF5T (Peak & Average, Ch.110, 802.11be(SU), MCS11)

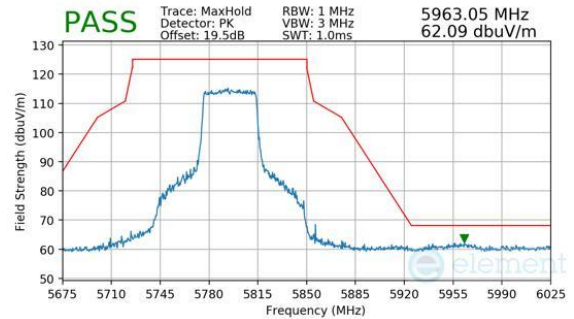

Plot 7-206. Antenna WF5T (Peak, Ch.159, 802.11be(SU), MCS11)

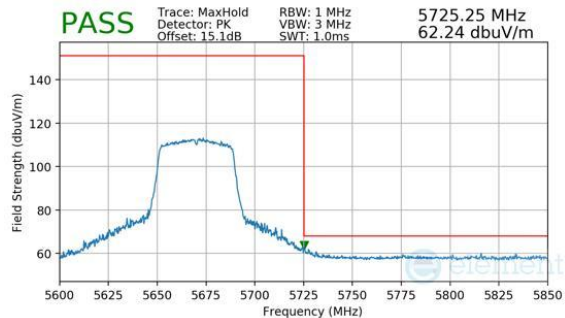


Plot 7-204. Antenna WF5T (Peak, Ch.134, 802.11be(SU), MCS11)

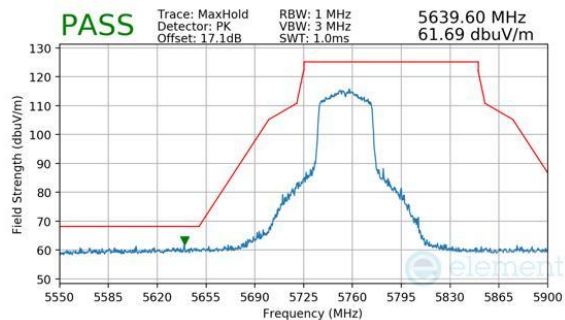


Plot 7-205. Antenna WF5T (Peak, Ch.151, 802.11be(SU), MCS11)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 185 of 267


7.6.6 Antenna WF5T Radiated Band Edge Measurements (80 MHz BW)

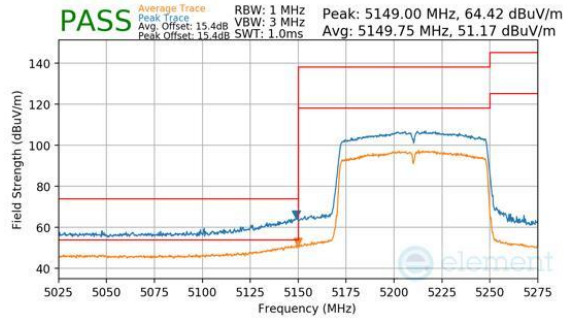


Plot 7-207. Antenna WF5T (Peak & Average, Ch.42, 802.11ac, MCS9)

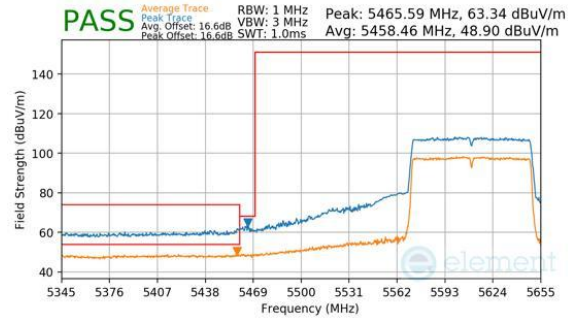


Plot 7-210. Antenna WF5T (Peak & Average, Ch.122, 802.11ac, MCS9)

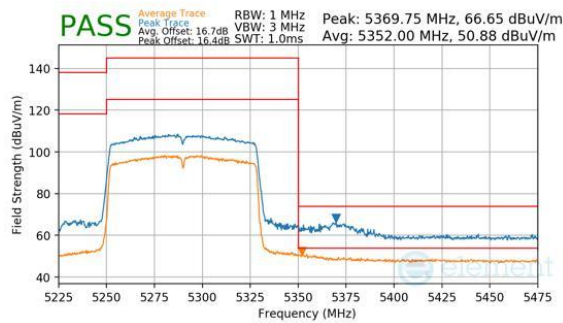


Plot 7-208. Antenna WF5T (Peak & Average, Ch.58, 802.11ac, MCS9)

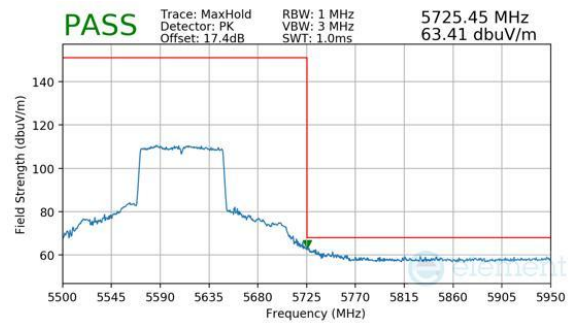

Plot 7-211. Antenna WF5T (Peak, Ch.122, 802.11ac, MCS9)

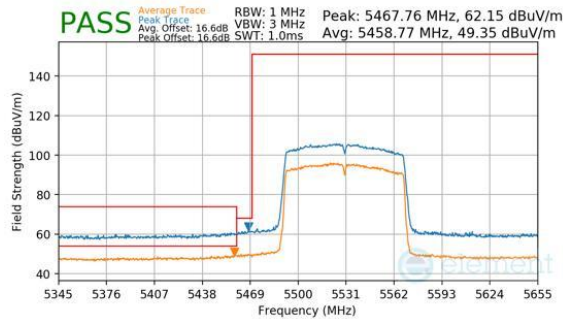


Plot 7-209. Antenna WF5T (Peak & Average, Ch.106, 802.11ac, MCS9)

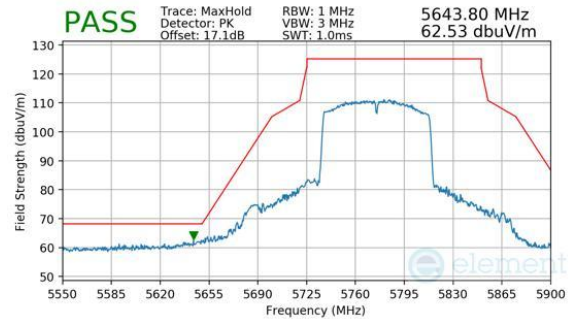


Plot 7-212. Antenna WF5T (Peak, Ch.155, 802.11ac, MCS9)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 186 of 267

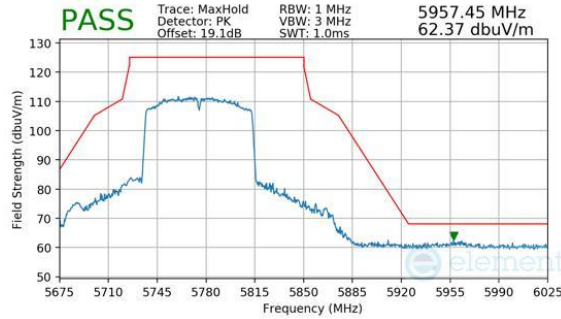


Plot 7-213. Antenna WF5T (Peak, Ch.155, 802.11ac, MCS9)

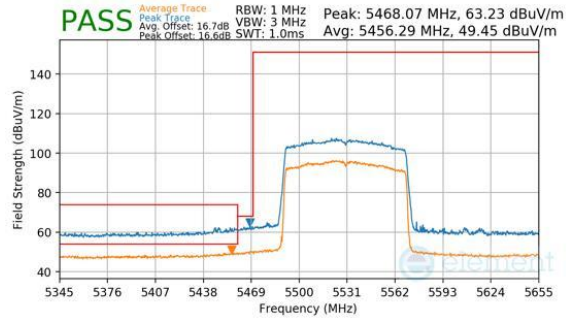


Plot 7-216. Antenna WF5T (Peak & Average, Ch.106, 802.11be(SU), MCS11)

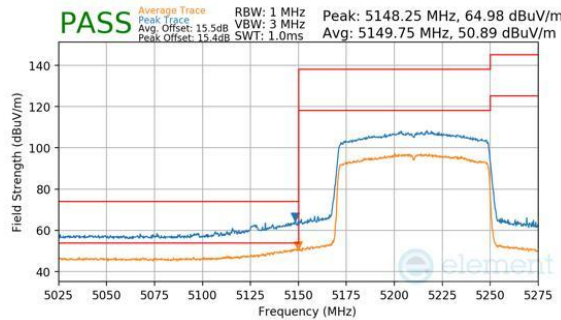


Plot 7-214. Antenna WF5T (Peak & Average, Ch.42, 802.11be(SU), MCS11)

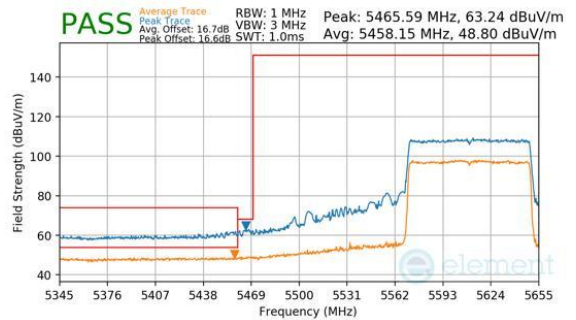

Plot 7-217. Antenna WF5T (Peak & Average, Ch.122, 802.11be(SU), MCS11)

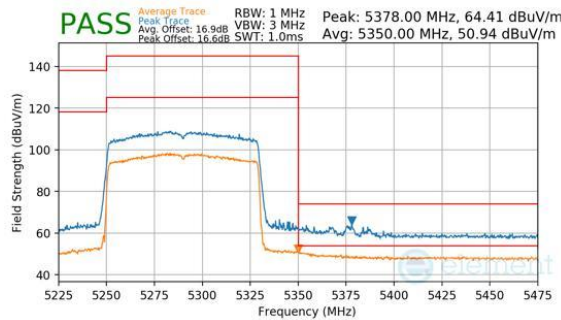


Plot 7-215. Antenna WF5T (Peak & Average, Ch.58, 802.11be(SU), MCS11)

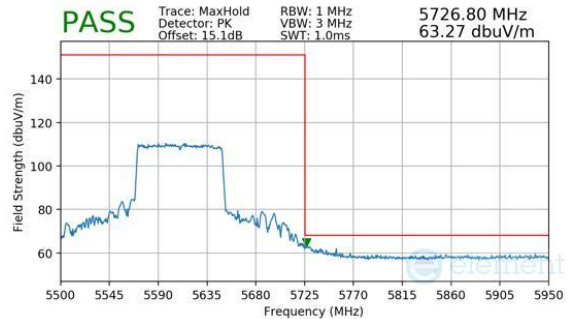


Plot 7-218. Antenna WF5T (Peak, Ch.122, 802.11be(SU), MCS11)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 187 of 267

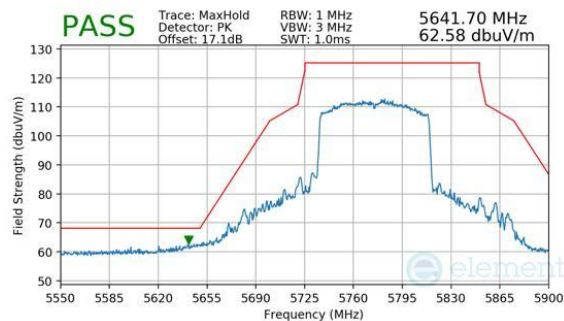


Plot 7-219. Antenna WF5T (Peak, Ch.155, 802.11be(SU), MCS11)

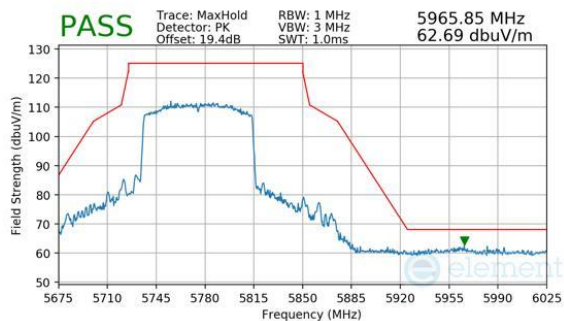


Plot 7-220. Antenna WF5T (Peak, Ch.155, 802.11be(SU), MCS11)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 188 of 267


7.6.7 Antenna WF5T Radiated Band Edge Measurements (160 MHz BW)

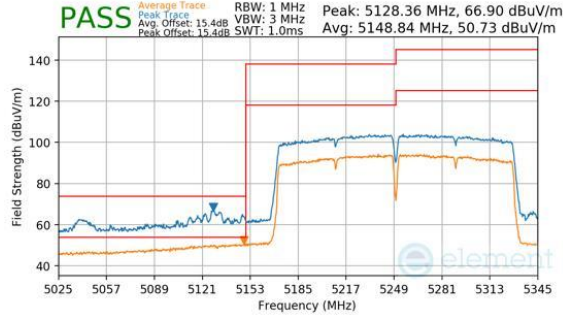


Plot 7-221. Antenna WF5T (Peak & Average, Ch.50, 802.11ac, MCS9)

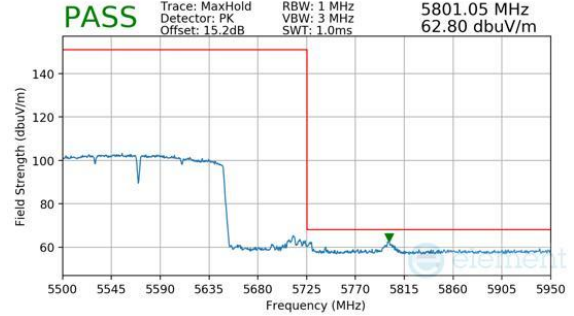


Plot 7-224. Antenna WF5T (Peak, Ch.114, 802.11ac, MCS9)

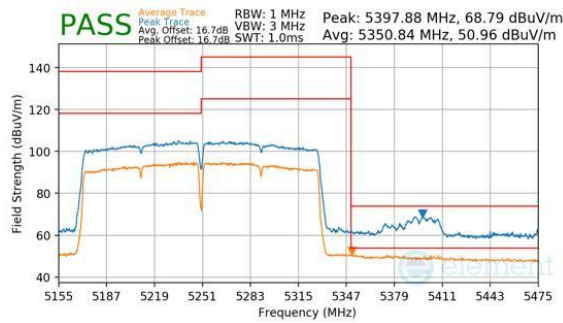


Plot 7-222. Antenna WF5T (Peak & Average, Ch.50, 802.11ac, MCS9)

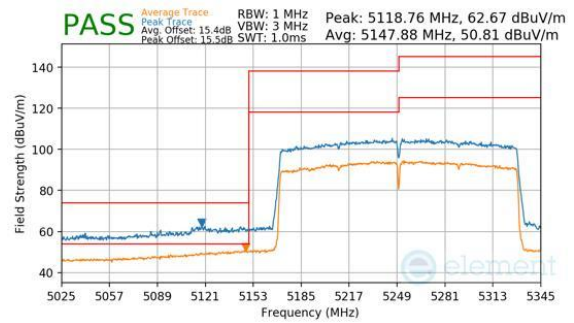

Plot 7-225. Antenna WF5T (Peak & Average, Ch.50, 802.11be(SU), MCS11)

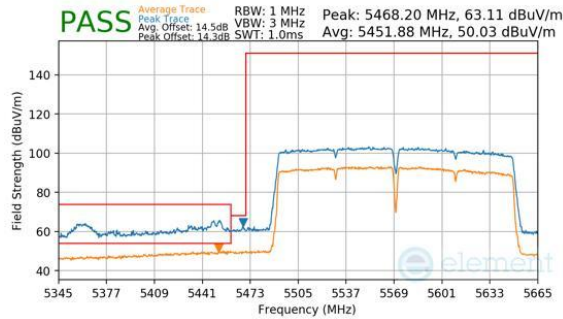


Plot 7-223. Antenna WF5T (Peak & Average, Ch.114, 802.11ac, MCS9)

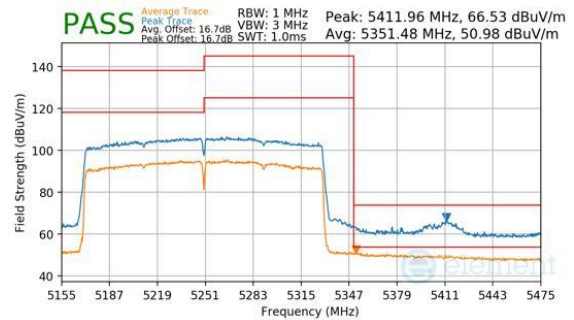


Plot 7-226. Antenna WF5T (Peak & Average, Ch.50, 802.11be(SU), MCS11)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 189 of 267

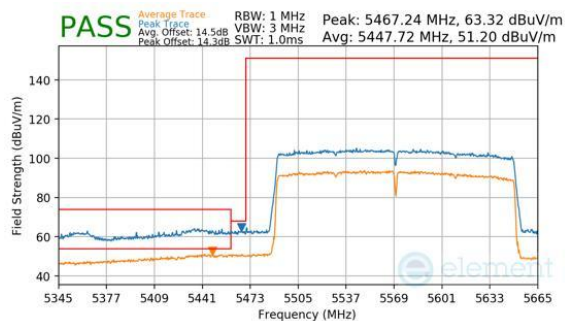


Plot 7-227. Antenna WF5T (Peak & Average, Ch.114, 802.11be(SU), MCS11)

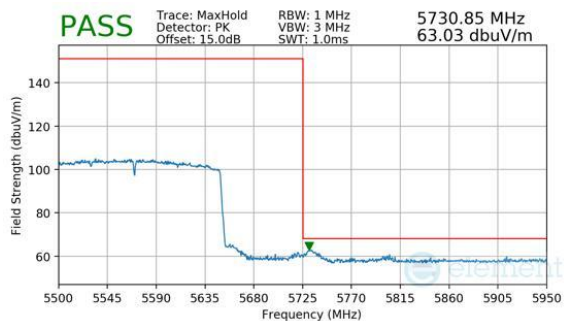


Plot 7-228. Antenna WF5T (Peak, Ch.114, 802.11be(SU), MCS11)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 190 of 267

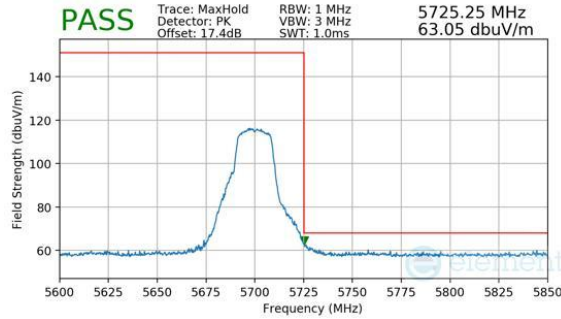


Plot 7-235. Antenna WF5B (Peak, Ch.140, 802.11n, MCS7)

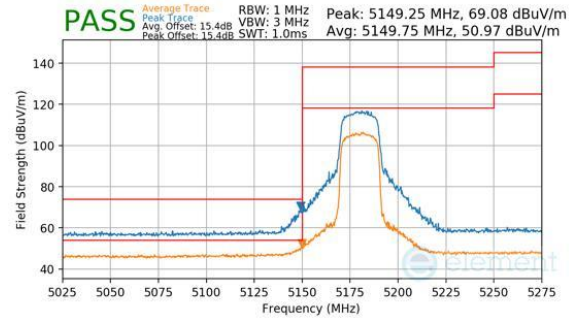


Plot 7-238. Antenna WF5B (Peak & Average, Ch.36, 802.11be(SU), MCS11)

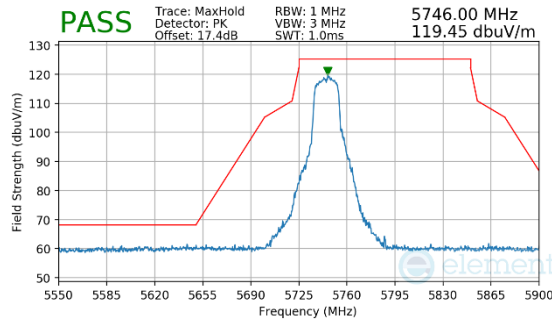


Plot 7-236. Antenna WF5B (Peak, Ch.149, 802.11n, MCS7)

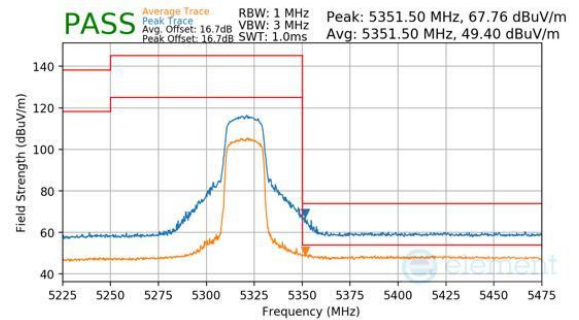

Plot 7-239. Antenna WF5B (Peak & Average, Ch.64, 802.11be(SU), MCS11)

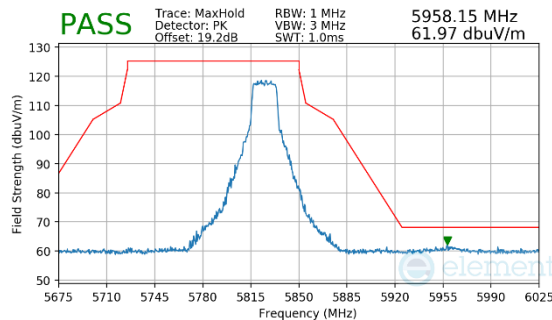

Plot 7-237. Antenna WF5B (Peak, Ch.165, 802.11n, MCS7)

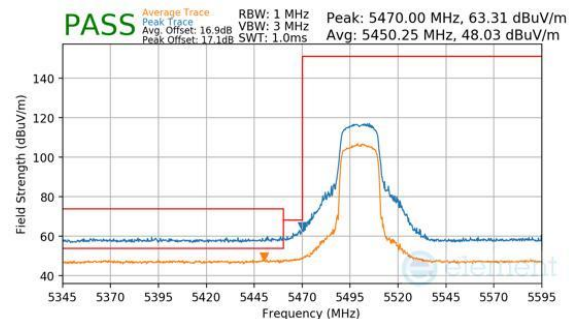

Plot 7-240. Antenna WF5B (Peak & Average, Ch.100, 802.11be(SU), MCS11)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 192 of 267