


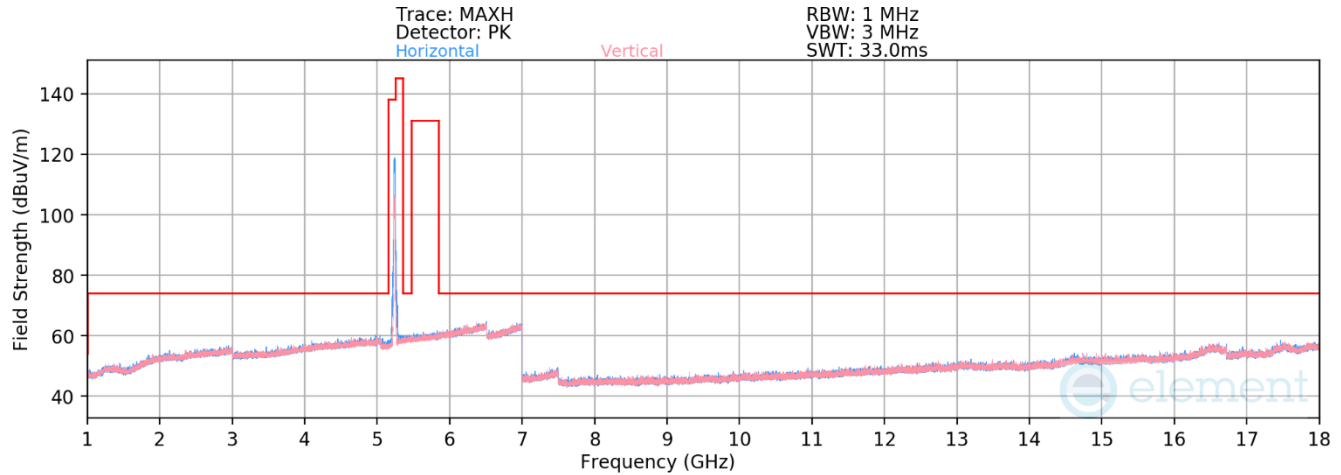


Plot 7-287. Radiated Spurious Emissions above 1 GHz CDD Primary (11be – Ch.48 – RU242)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5240 MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10480.00	Peak	V	-	-	-68.07	9.46	48.38	68.23	-19.85
* 15720.00	Average	H	-	-	-79.93	14.49	41.56	53.98	-12.42
* 15720.00	Peak	H	-	-	-69.02	14.49	52.47	73.98	-21.51

Table 7-209. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 160 of 383

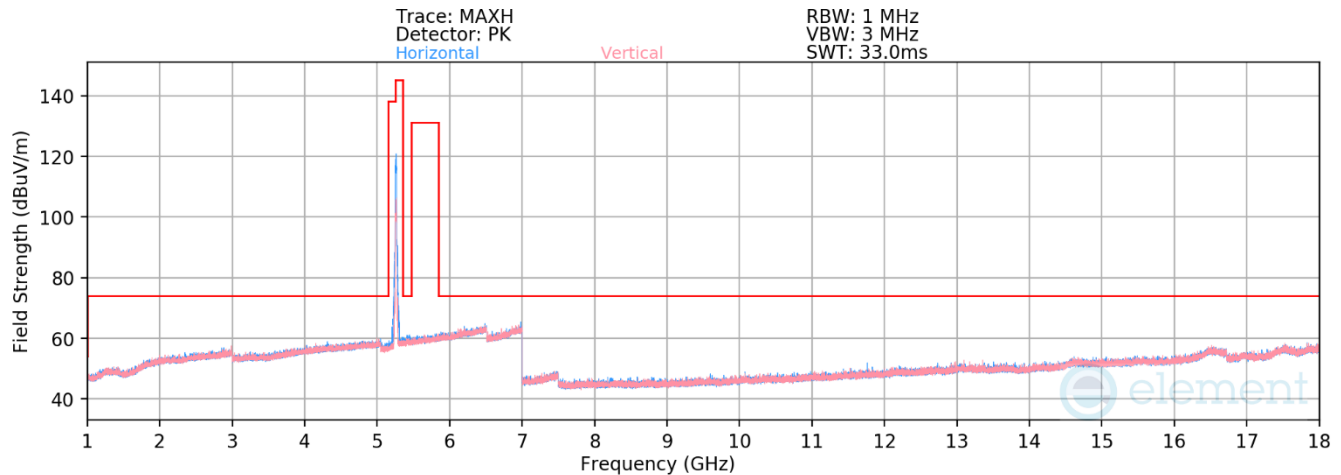

Plot 7-288. Radiated Spurious Emissions above 1 GHz CDD Primary (11be – Ch.52 – RU242)

Mode: 802.11be (20 MHz BW)

Data Rate: MCS0

RU Index: 61

Distance of Measurements: 3 Meters


Operating Frequency: 5260 MHz

Channel: 52


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10520.00	Peak	V	-	-	-68.34	9.46	48.11	68.23	-20.12
15780.00	Average	H	-	-	-79.77	14.43	41.66	53.98	-12.32
15780.00	Peak	H	-	-	-69.29	14.43	52.14	73.98	-21.84

Table 7-210. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 161 of 383

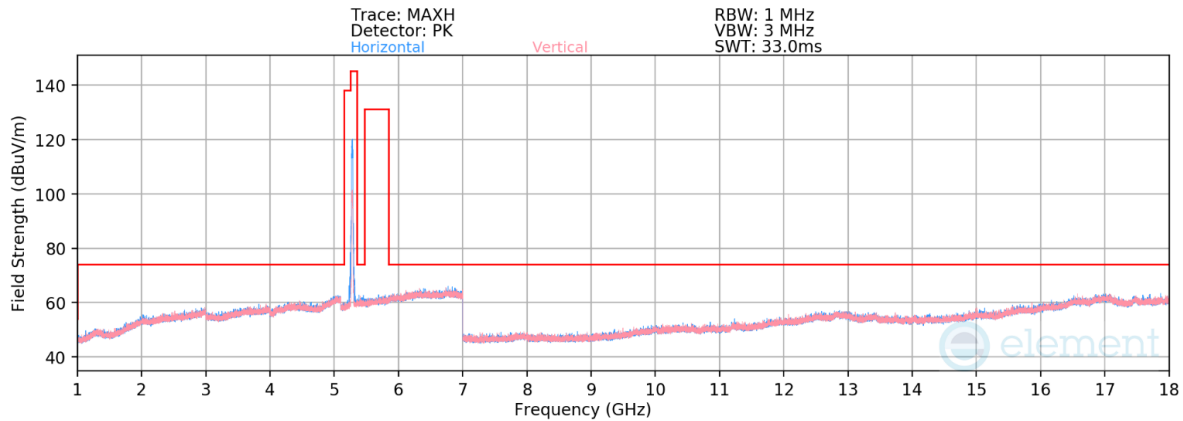

Plot 7-289. Radiated Spurious Emissions above 1 GHz CDD Primary (11be - Ch.56 - RU242)

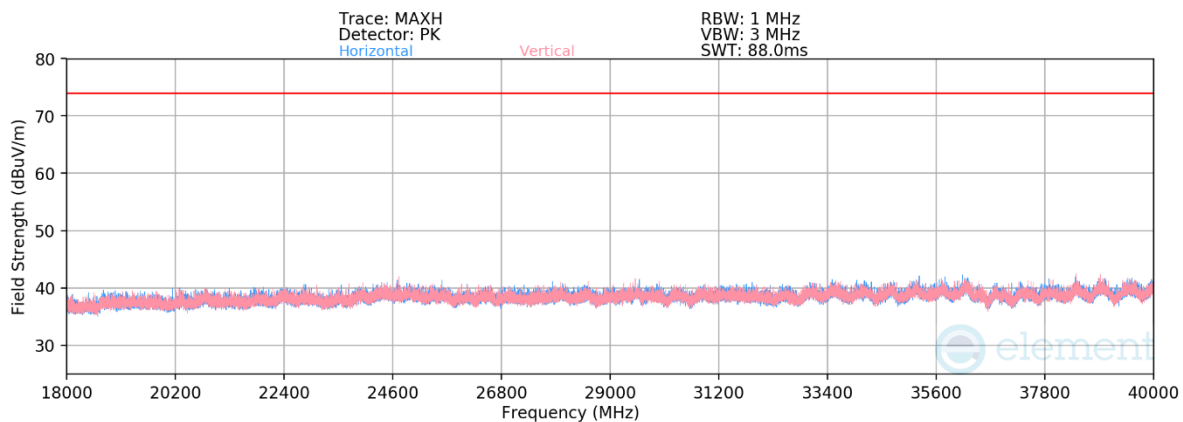


Plot 7-290. Radiated Spurious Emissions 18 GHz - 40 GHz CDD Primary (11be Ch.56 - RU242)

Mode:	802.11be (20 MHz BW)
Data Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5280 MHz
Channel:	56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10560.00	Peak	H	-	-	-73.49	18.49	0.00	52.00	68.23	-16.23
* 15840.00	Average	H	-	-	-85.83	26.41	0.00	47.58	53.98	-6.40
* 15840.00	Peak	H	-	-	-74.64	26.41	0.00	58.78	73.98	-15.20
* 21120.00	Average	V	-	-	-63.04	-6.08	-9.54	28.34	53.98	-25.64
* 21120.00	Peak	V	-	-	-51.51	-6.08	-9.54	39.87	73.98	-34.11
26400.00	Peak	V	-	-	-53.04	-4.04	-9.54	40.38	68.23	-27.85
* 31680.00	Average	H	-	-	-64.90	-2.76	-9.54	29.80	53.98	-24.18
* 31680.00	Peak	H	-	-	-53.35	-2.66	-9.54	41.45	73.98	-32.53

Table 7-211. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 162 of 383

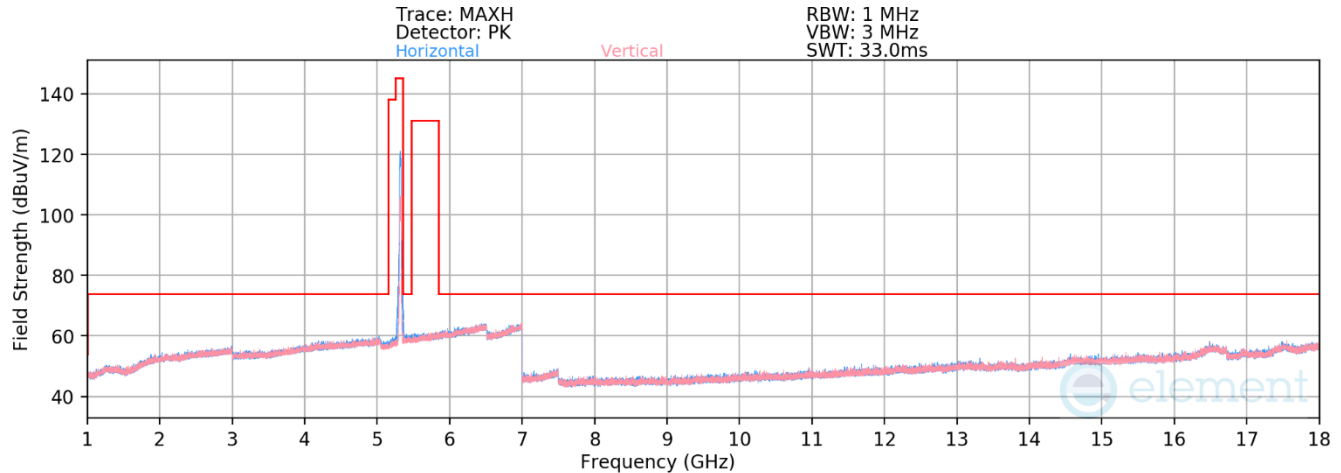


Plot 7-291. Radiated Spurious Emissions above 1 GHz CDD Primary (11be – Ch.64 – RU242)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5320 MHz
Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 10640.00	Average	H	-	-	-78.94	9.65	37.71	53.98	-16.27
* 10640.00	Peak	H	-	-	-67.46	9.65	49.19	73.98	-24.79
* 15960.00	Average	V	-	-	-80.05	14.89	41.84	53.98	-12.14
* 15960.00	Peak	V	-	-	-69.75	14.89	52.14	73.98	-21.84

Table 7-212. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 163 of 383

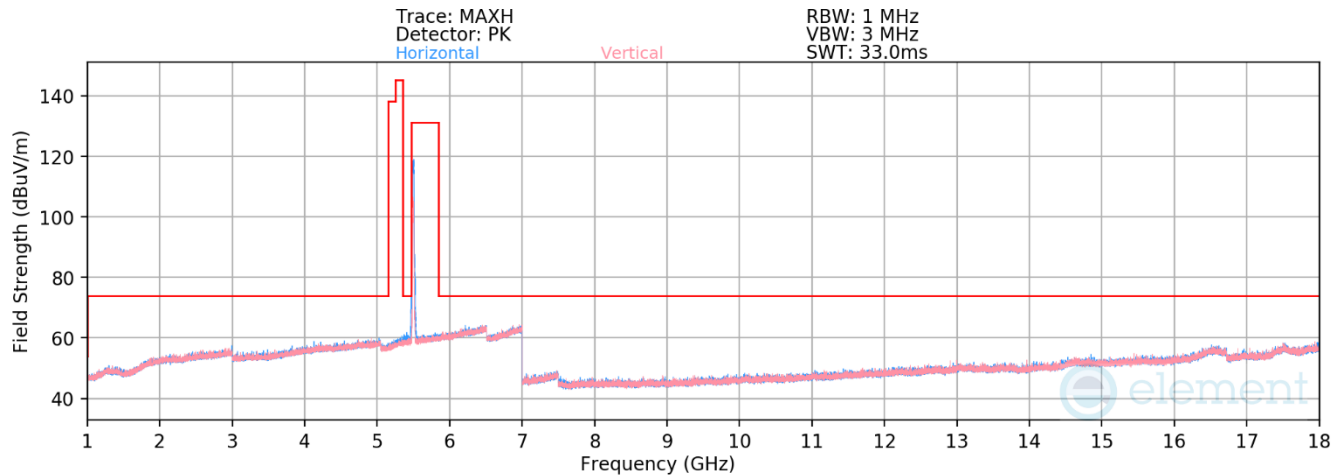


Plot 7-292. Radiated Spurious Emissions above 1 GHz CDD Primary (11be – Ch.100 – RU242)

Mode:	802.11be (20 MHz BW)
Data Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5500 MHz
Channel:	100


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11000.00	Average	H	-	-	-79.55	10.22	37.67	53.98	-16.31
*	11000.00	Peak	H	-	-	-68.82	10.22	48.40	73.98	-25.58
	16500.00	Peak	V	-	-	-69.45	17.62	55.18	68.23	-13.05

Table 7-213. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 164 of 383

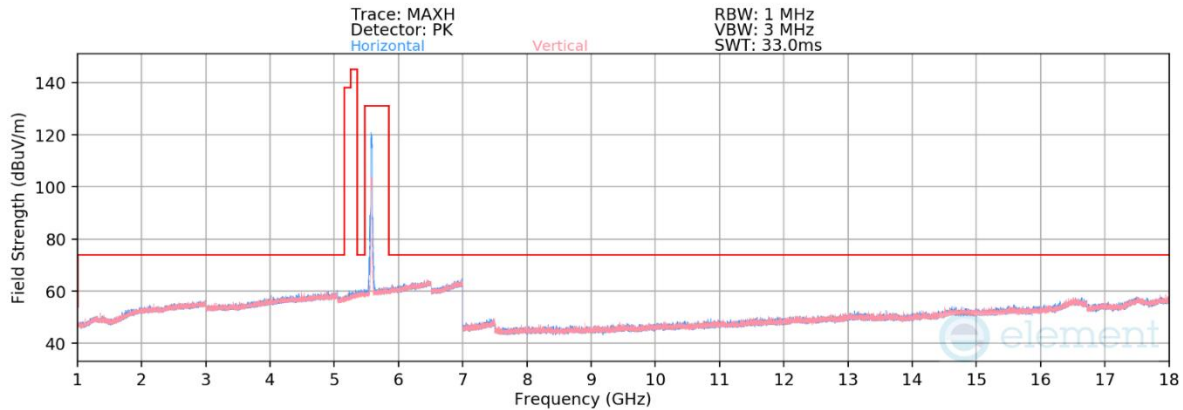

Plot 7-293. Radiated Spurious Emissions above 1 GHz CDD Primary (11be – Ch.116 – RU242)

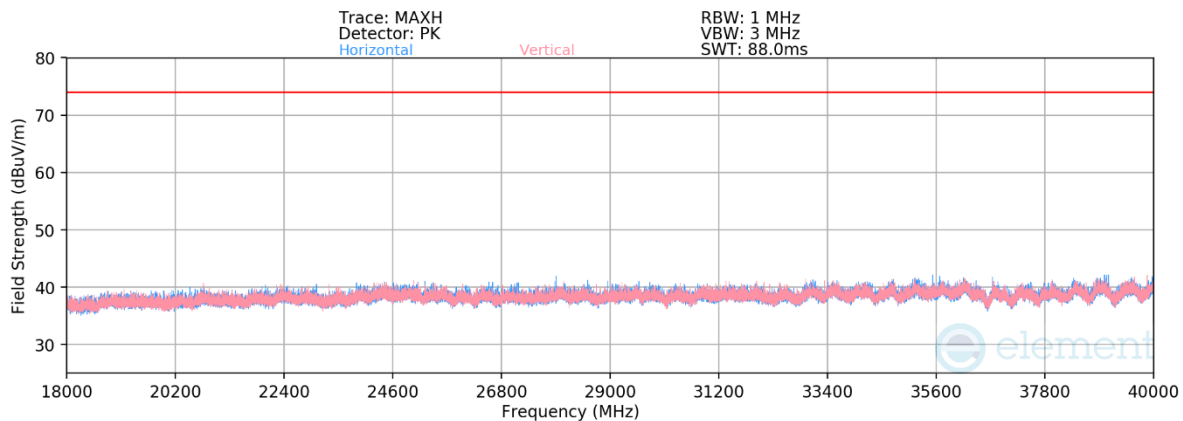

Plot 7-294. Radiated Spurious Emissions 18 GHz - 40 GHz CDD Primary (11be Ch.116 — RU242)

Mode: 802.11be (20 MHz BW)

Data Rate: MCS0

RU Index: 61

Distance of Measurements: 3 Meters


Operating Frequency: 5580 MHz

Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11160.00	Average	H	-	-	-79.33	10.11	0.00	37.79	53.98	-16.19
* 11160.00	Peak	H	-	-	-68.74	10.11	0.00	48.38	73.98	-25.60
16740.00	Peak	H	-	-	-68.73	16.94	0.00	55.22	68.23	-13.01
* 22320.00	Average	V	-	-	-62.57	-5.46	-9.54	29.43	53.98	-24.55
* 22320.00	Peak	V	-	-	-51.19	-5.46	-9.54	40.81	73.98	-33.17
27900.00	Peak	H	-	-	-53.23	-2.91	-9.54	41.32	68.23	-26.91
33480.00	Peak	V	-	-	-60.37	-3.59	-9.54	33.50	68.23	-34.73

Table 7-214. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 165 of 383

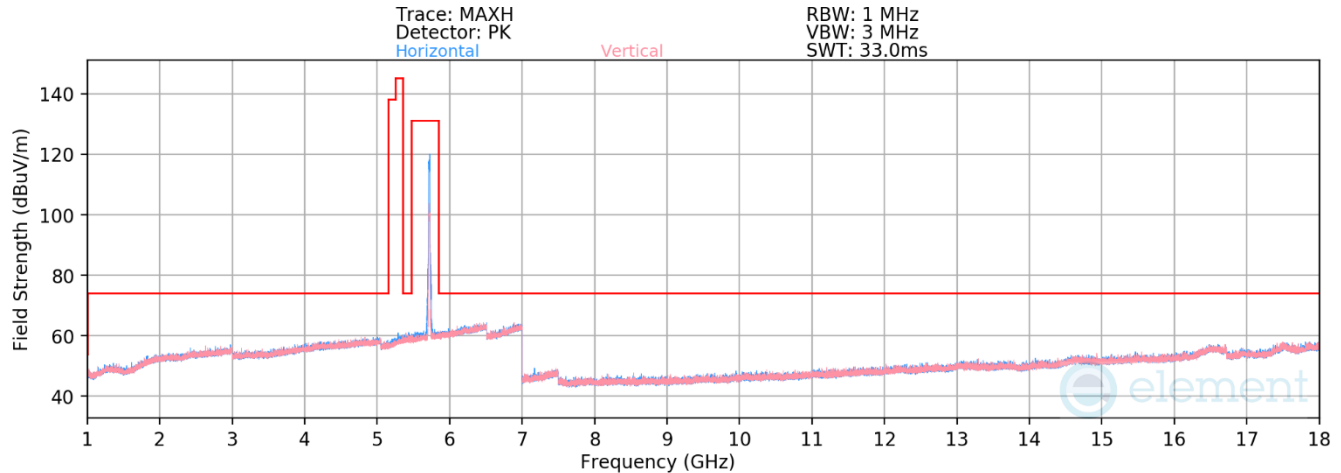

Plot 7-295. Radiated Spurious Emissions above 1 GHz CDD Primary (11be – Ch.144 – RU242)

Mode: 802.11be (20 MHz BW)

Data Rate: MCS0

RU Index: 61

Distance of Measurements: 3 Meters


Operating Frequency: 5720 MHz

Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11440.00	Average	H	-	-	-79.41	10.45	38.05	53.98	-15.93
* 11440.00	Peak	H	-	-	-68.52	10.45	48.93	73.98	-25.05
17160.00	Peak	H	-	-	-69.38	18.07	55.69	68.23	-12.54

Table 7-215. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 166 of 383

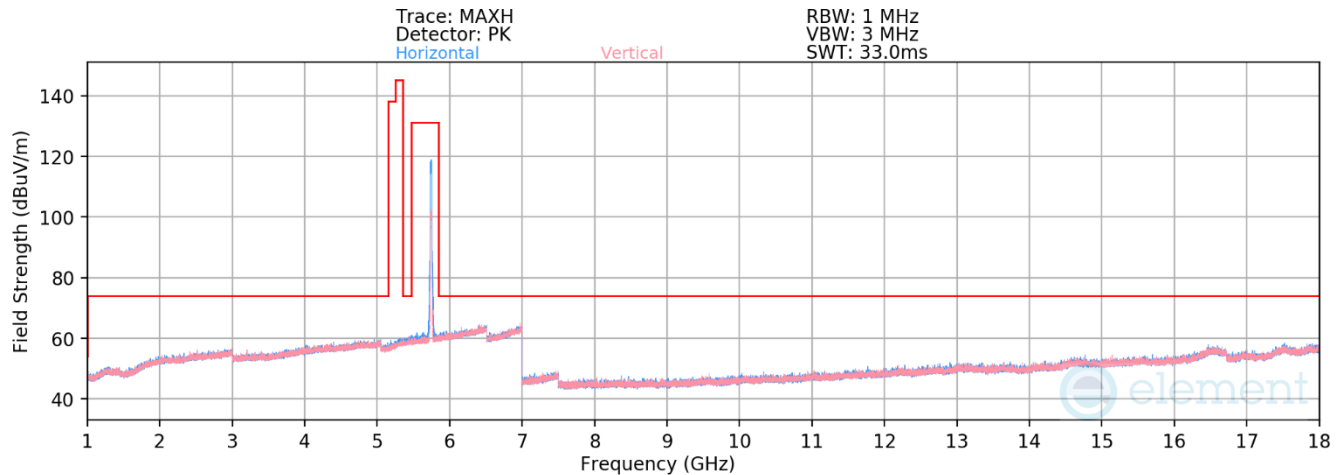


Plot 7-296. Radiated Spurious Emissions above 1 GHz CDD Primary (11be – Ch.149 – RU242)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5745 MHz
Channel: 149


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
11490.00	Average	V	-	-	-79.34	10.59	38.25	53.98	-15.73
11490.00	Peak	V	-	-	-68.23	10.59	49.36	73.98	-24.62
17235.00	Peak	H	-	-	-69.45	17.67	55.22	68.23	-13.01

Table 7-216. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 167 of 383

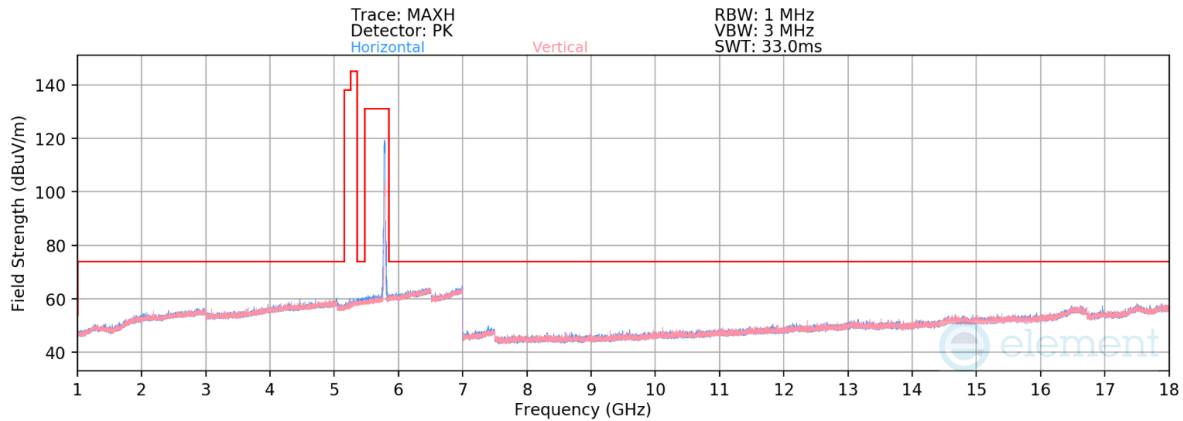

Plot 7-297. Radiated Spurious Emissions above 1 GHz CDD Primary (11be – Ch.157 – RU242)

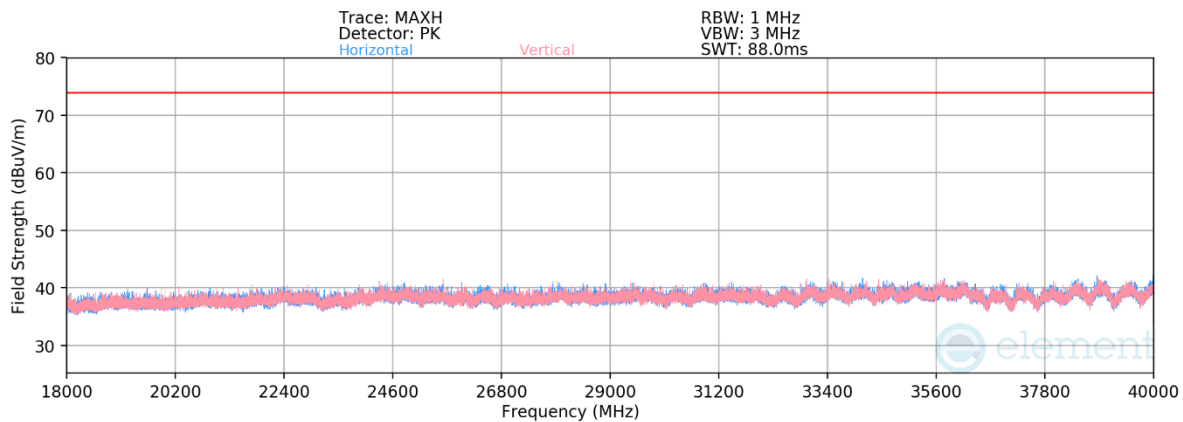


Plot 7-298. Radiated Spurious Emissions 18 GHz - 40 GHz CDD Primary (11be Ch.157 — RU242)

Mode:	802.11be (20 MHz BW)
Data Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5785 MHz
Channel:	157

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11570.00	Average	V	-	-	-79.77	10.61	0.00	37.84	53.98	-16.14
*	11570.00	Peak	V	-	-	-68.90	10.61	0.00	48.71	73.98	-25.27
	17355.00	Peak	H	-	-	-69.81	18.95	0.00	56.14	68.23	-12.09
	23140.00	Peak	H	-	-	-51.73	-5.67	-9.54	40.06	68.23	-28.17
	28925.00	Peak	H	-	-	-54.10	-2.80	-9.54	40.56	68.23	-27.67
	34710.00	Peak	V	-	-	-50.63	-4.60	-9.54	42.23	68.23	-26.00

Table 7-217. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 168 of 383

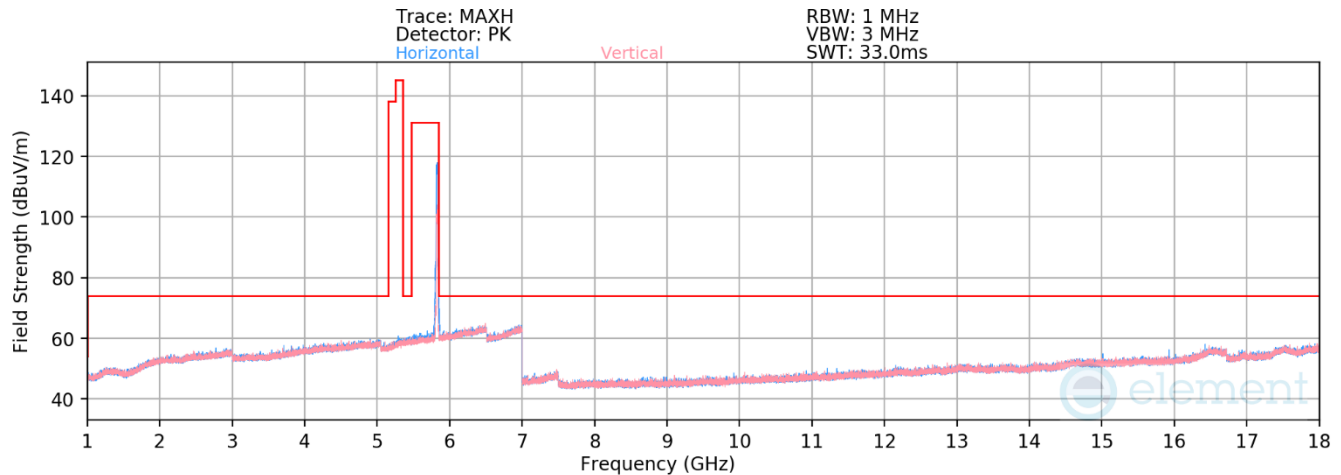

Plot 7-299. Radiated Spurious Emissions above 1 GHz CDD Primary (11be – Ch.165 – RU242)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5825 MHz
Channel: 165


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	H	-	-	-79.48	10.73	38.25	53.98	-15.73
* 11650.00	Peak	H	-	-	-68.35	10.73	49.39	73.98	-24.59
17475.00	Peak	H	-	-	-70.06	20.51	57.45	68.23	-10.78

Table 7-218. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 169 of 383

7.6.2 CDD Diversity Radiated Spurious Emissions

RU26 / RU52

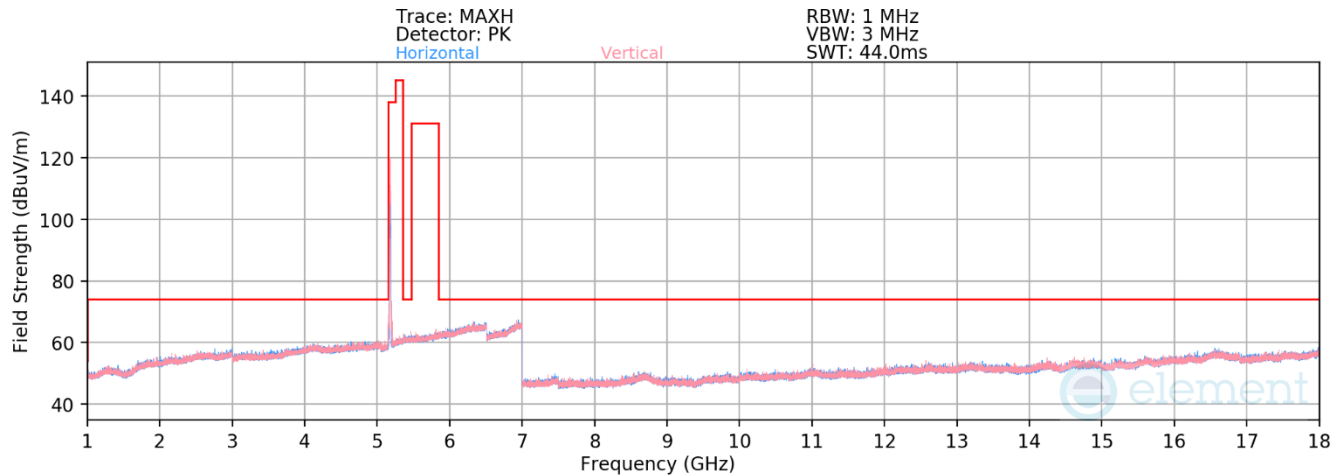


Plot 7-300. Radiated Spurious Emissions above 1 GHz CDD Diversity (11be – Ch.36 – RU26)

Mode:	802.11be (20 MHz BW)
Data Rate:	MCS0
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	5180 MHz
Channel:	36


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10360.00	Peak	V	-	-	-68.97	11.90	49.93	68.23	-18.30
* 15540.00	Average	V	-	-	-81.28	18.37	44.09	53.98	-9.89
* 15540.00	Peak	V	-	-	-69.38	18.37	55.99	73.98	-17.99

Table 7-219. Radiated Measurements CDD Diversity (RU26)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 170 of 383

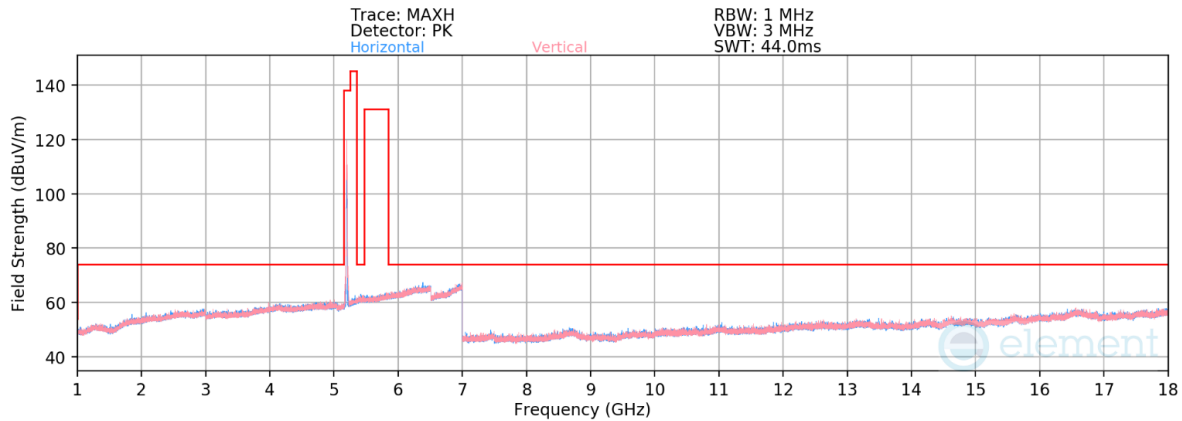

Plot 7-301. Radiated Spurious Emissions above 1 GHz CDD Diversity (11be - Ch.40 - RU26)

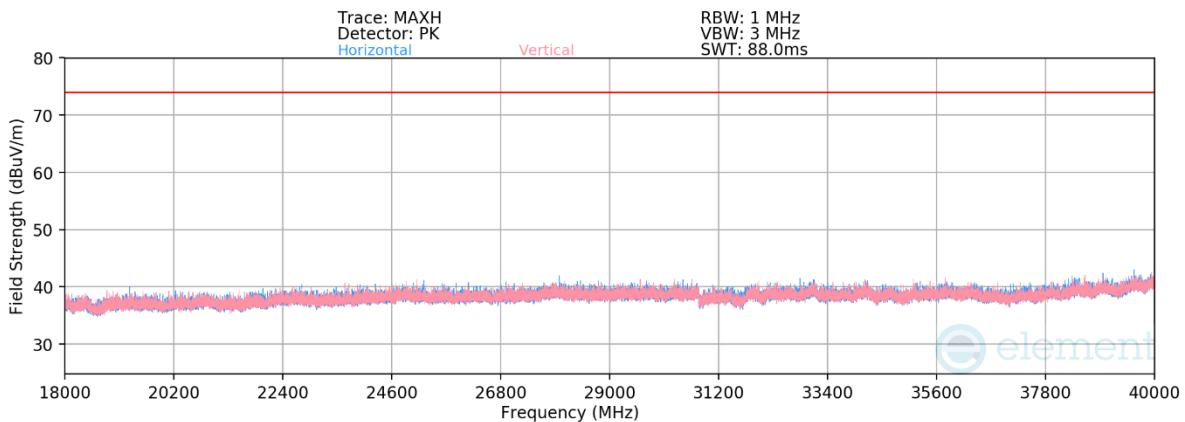


Plot 7-302. Radiated Spurious Emissions 18 GHz - 40 GHz CDD Diversity (11be Ch.40 - RU26)

Mode:	802.11be (20 MHz BW)
Data Rate:	MCS0
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	5200 MHz
Channel:	40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10400.00	Peak	V	-	-	-69.23	11.91	0.00	49.68	68.23	-18.55
* 15600.00	Average	V	-	-	-81.58	18.87	0.00	44.29	53.98	-9.69
* 15600.00	Peak	V	-	-	-70.17	18.87	0.00	55.71	73.98	-18.27
* 20800.00	Average	V	-	-	-63.02	-5.90	-9.54	28.54	53.98	-25.44
* 20800.00	Peak	V	-	-	-51.08	-5.87	-9.54	40.51	73.98	-33.47
26000.00	Peak	V	-	-	-52.60	-4.47	-9.54	40.39	68.23	-27.84
* 31200.00	Average	V	-	-	-64.87	-2.74	-9.54	29.85	53.98	-24.13
* 31200.00	Peak	V	-	-	-52.92	-2.74	-9.54	41.80	73.98	-32.18

Table 7-220. Radiated Measurements CDD Diversity (RU26)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 171 of 383

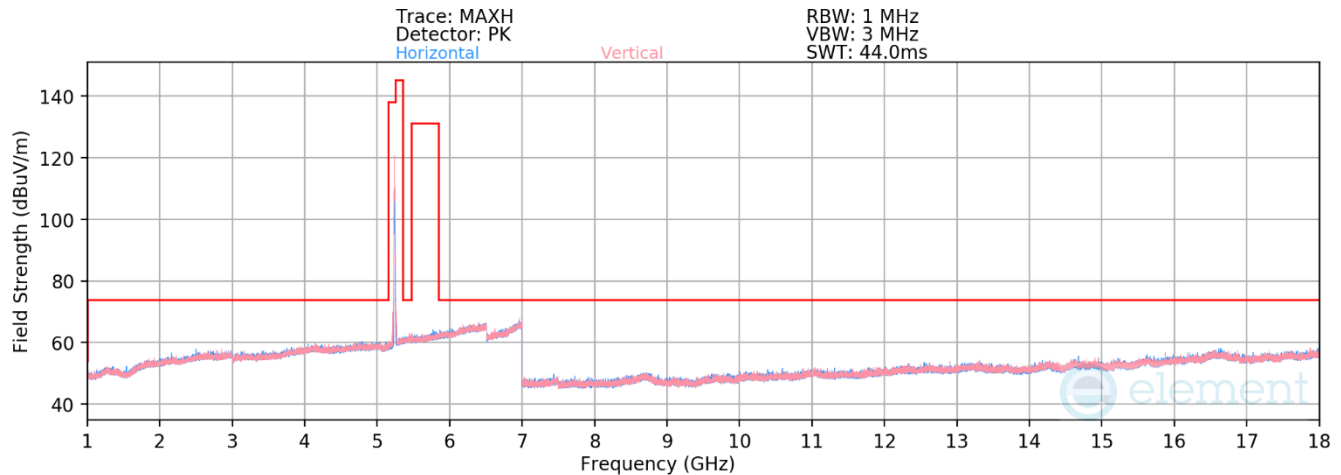


Plot 7-303. Radiated Spurious Emissions above 1 GHz CDD Diversity (11be – Ch.48 – RU26)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5240 MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10480.00	Peak	V	-	-	-68.97	12.29	50.32	68.23	-17.91
* 15720.00	Average	V	-	-	-81.44	18.53	44.08	53.98	-9.90
* 15720.00	Peak	V	-	-	-70.89	18.53	54.64	73.98	-19.34

Table 7-221. Radiated Measurements CDD Diversity (RU26)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 172 of 383

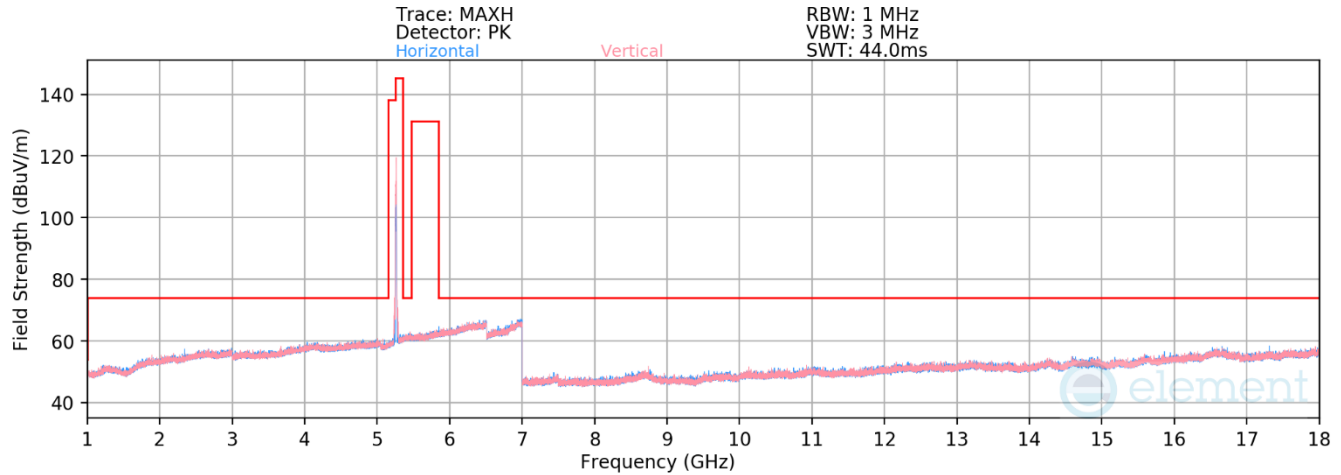


Plot 7-304. Radiated Spurious Emissions above 1 GHz CDD Diversity (11be – Ch.52 – RU52)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5260 MHz
Channel: 52


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10520.00	Peak	H	-	-	-69.34	13.18	50.83	68.23	-17.40
15780.00	Average	H	-	-	-81.31	18.34	44.03	53.98	-9.95
15780.00	Peak	H	-	-	-70.30	18.34	55.04	73.98	-18.94

Table 7-222. Radiated Measurements CDD Diversity (RU52)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 173 of 383

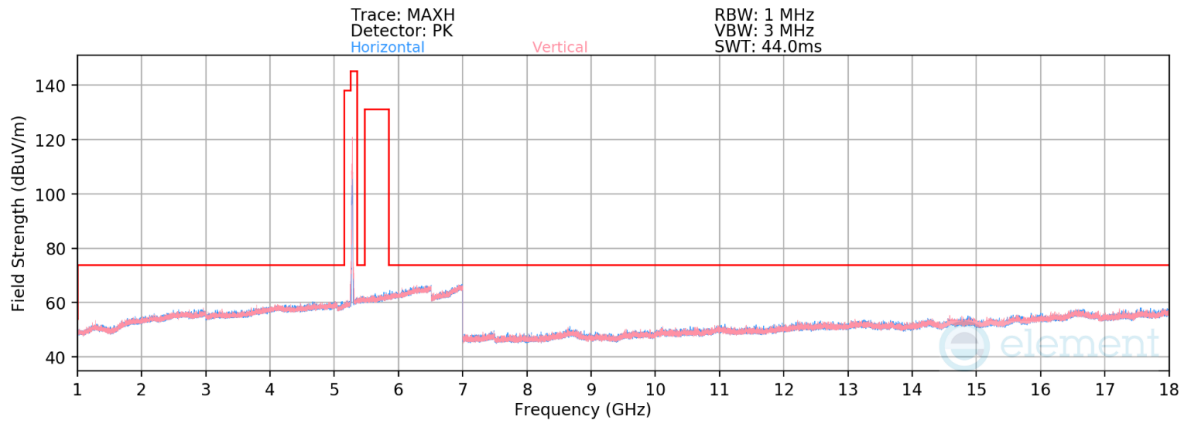

Plot 7-305. Radiated Spurious Emissions above 1 GHz CDD Diversity (11be – Ch.56 – RU26)

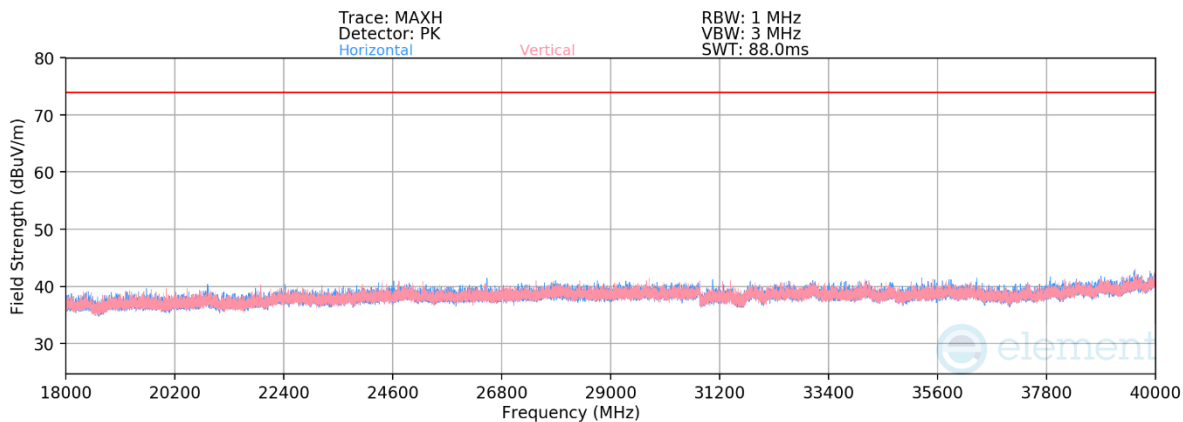


Plot 7-306. Radiated Spurious Emissions 18 GHz - 40 GHz CDD Diversity (11be Ch.56 — RU26)

Mode:	802.11be (20 MHz BW)
Data Rate:	MCS0
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	5280 MHz
Channel:	56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10560.00	Peak	H	-	-	-70.08	13.18	0.00	50.09	68.23	-18.14
* 15840.00	Average	H	-	-	-81.21	18.13	0.00	43.92	53.98	-10.06
* 15840.00	Peak	H	-	-	-70.00	18.13	0.00	55.13	73.98	-18.85
* 21120.00	Average	V	-	-	-63.00	-6.08	-9.54	28.38	53.98	-25.60
* 21120.00	Peak	V	-	-	-51.64	-6.08	-9.54	39.74	73.98	-34.24
26400.00	Peak	H	-	-	-52.95	-4.04	-9.54	40.47	68.23	-27.76
* 31680.00	Average	H	-	-	-65.19	-2.70	-9.54	29.57	53.98	-24.41
* 31680.00	Peak	H	-	-	-53.90	-2.70	-9.54	40.86	73.98	-33.12

Table 7-223. Radiated Measurements CDD Diversity (RU26)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 174 of 383

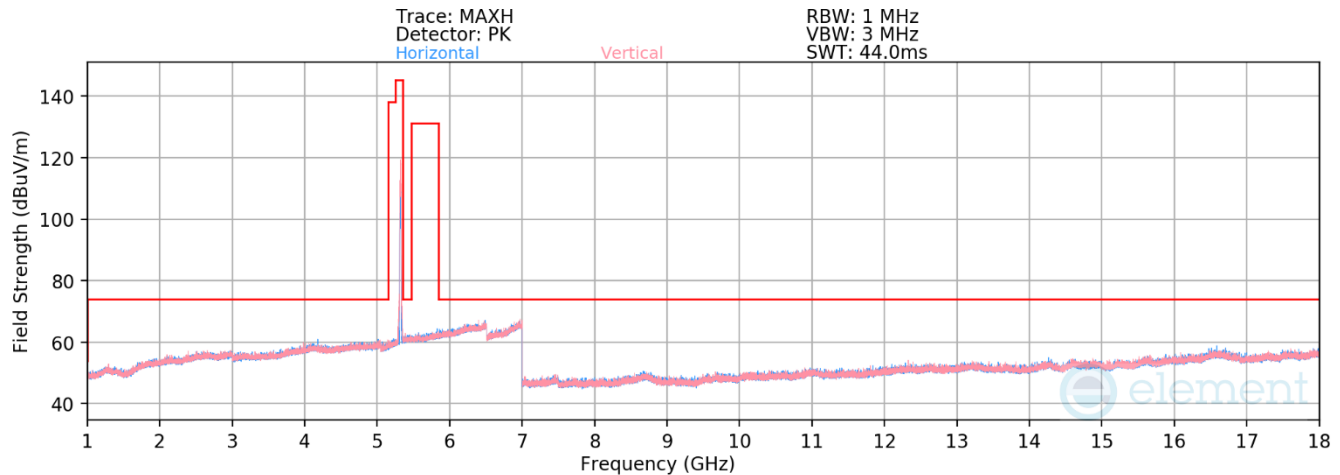


Plot 7-307. Radiated Spurious Emissions above 1 GHz CDD Diversity (11be – Ch.64 – RU52)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5320 MHz
Channel: 64

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	10640.00	Average	H	-	-	-80.16	12.63	39.47	53.98	-14.51
*	10640.00	Peak	H	-	-	-67.77	12.63	51.86	73.98	-22.12
*	15960.00	Average	H	-	-	-81.56	18.35	43.79	53.98	-10.19
*	15960.00	Peak	H	-	-	-70.51	18.35	54.84	73.98	-19.14

Table 7-224. Radiated Measurements CDD Diversity (RU52)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 175 of 383

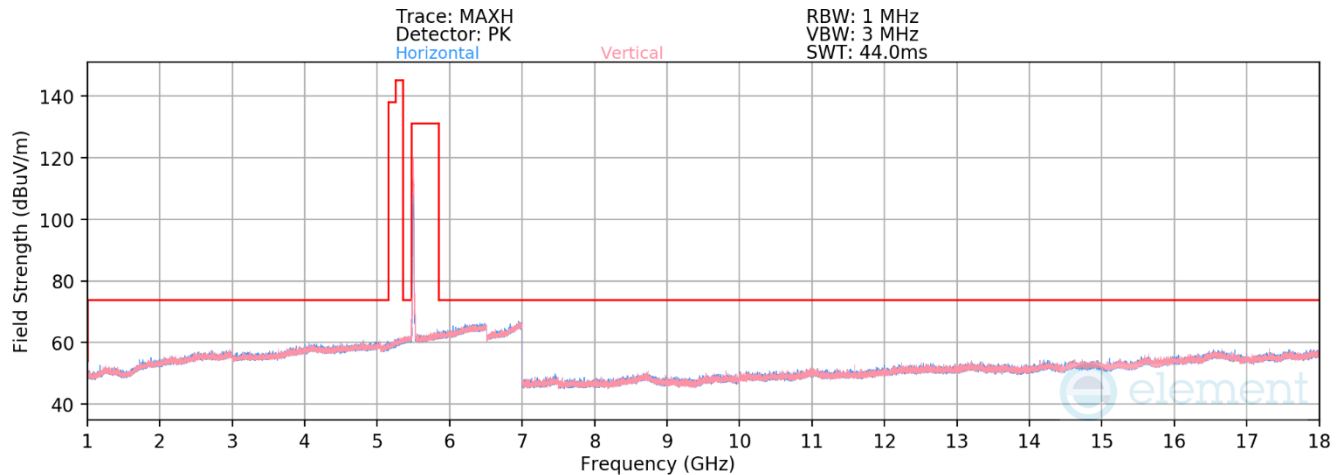


Plot 7-308. Radiated Spurious Emissions above 1 GHz CDD Diversity (11be – Ch.100 – RU52)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5500 MHz
Channel: 100


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11000.00	Average	H	-	-	-80.49	13.21	39.72	53.98	-14.26
*	11000.00	Peak	H	-	-	-69.61	13.21	50.59	73.98	-23.39
	16500.00	Peak	V	-	-	-69.58	19.55	56.97	68.23	-11.26

Table 7-225. Radiated Measurements CDD Diversity (RU52)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 176 of 383

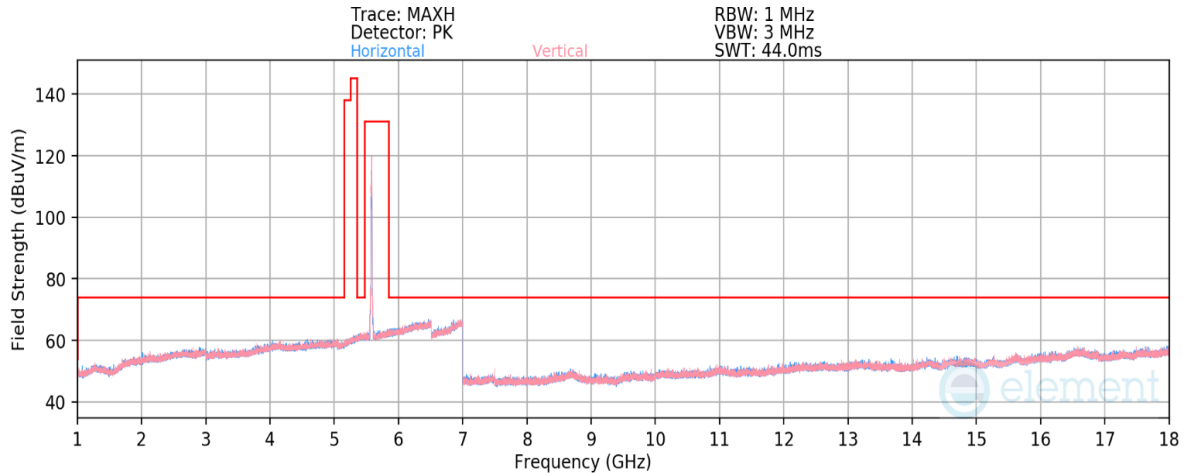

Plot 7-309. Radiated Spurious Emissions above 1 GHz CDD Diversity (11be – Ch.116 – RU52)

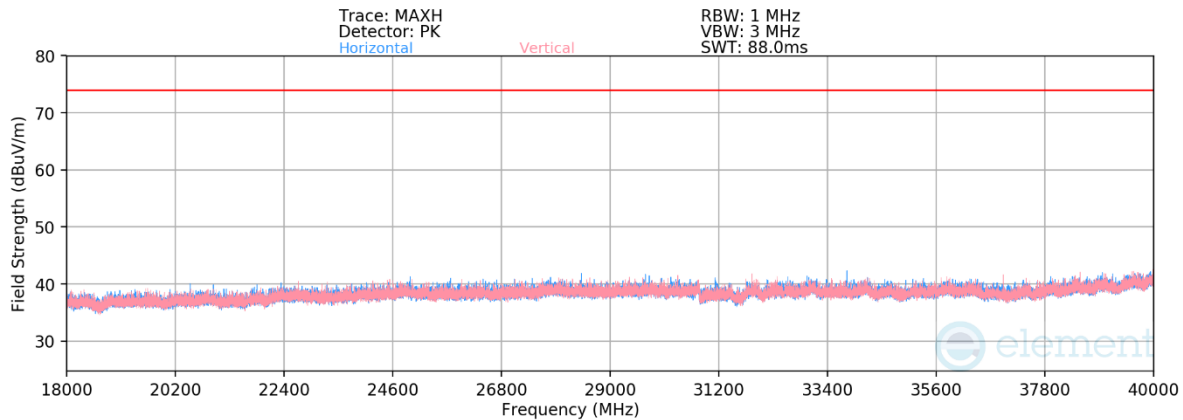

Plot 7-310. Radiated Spurious Emissions 18 GHz - 40 GHz CDD Diversity (11be Ch.116 — RU52)

Mode: 802.11be (20 MHz BW)

Data Rate: MCS0

RU Index: 4

Distance of Measurements: 3 Meters


Operating Frequency: 5580 MHz

Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11160.00	Average	V	-	-	-80.07	12.96	0.00	39.88	53.98	-14.10
* 11160.00	Peak	V	-	-	-69.06	12.96	0.00	50.90	73.98	-23.08
16740.00	Peak	V	-	-	-71.30	19.99	0.00	55.68	68.23	-12.55
* 22320.00	Average	V	-	-	-62.67	-5.49	-9.54	29.30	53.98	-24.68
* 22320.00	Peak	V	-	-	-50.74	-5.49	-9.54	41.23	73.98	-32.75
27900.00	Peak	H	-	-	-53.67	-3.02	-9.54	40.77	68.23	-27.46
33480.00	Peak	H	-	-	-52.11	-3.63	-9.54	41.72	68.23	-26.51

Table 7-226. Radiated Measurements CDD Diversity (RU52)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 177 of 383

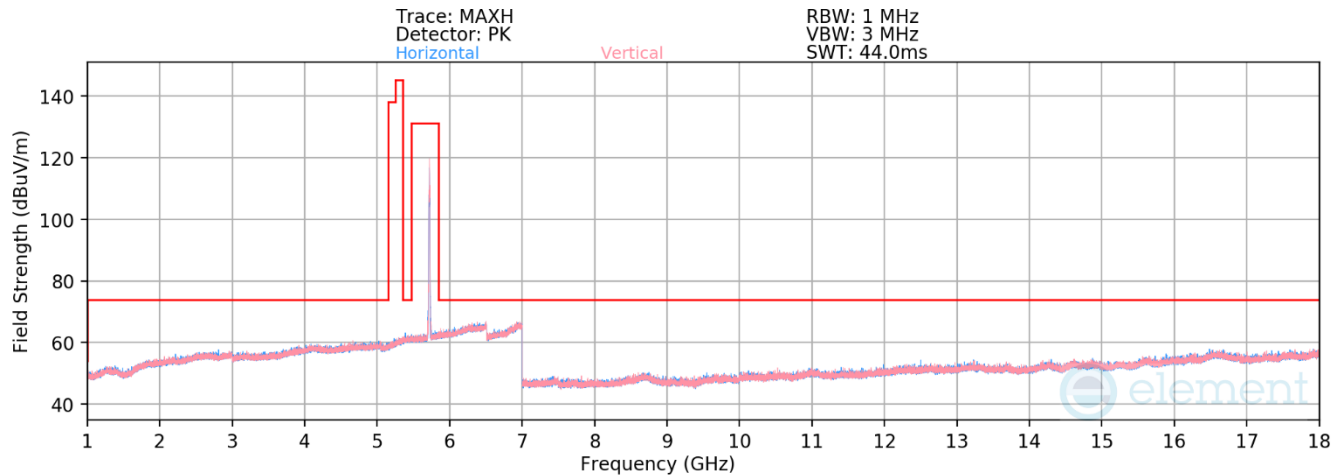


Plot 7-311. Radiated Spurious Emissions above 1 GHz CDD Diversity (11be – Ch.144 – RU52)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5720 MHz
Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11440.00	Average	V	-	-	-80.81	13.84	40.03	53.98	-13.95
* 11440.00	Peak	V	-	-	-70.00	13.84	50.84	73.98	-23.14
17160.00	Peak	V	-	-	-71.13	19.87	55.73	68.23	-12.50

Table 7-227. Radiated Measurements CDD Diversity (RU52)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

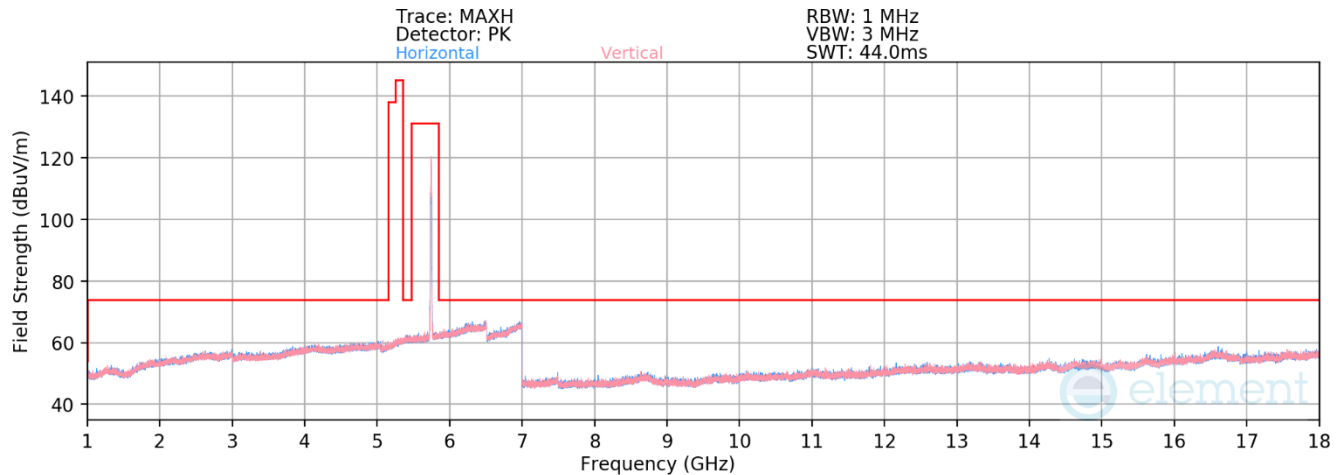


Plot 7-312. Radiated Spurious Emissions above 1 GHz CDD Diversity (11be – Ch.149 – RU26)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5745 MHz
Channel: 149


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
11490.00	Average	H	-	-	-80.71	13.57	39.86	53.98	-14.12
11490.00	Peak	H	-	-	-70.38	13.57	50.19	73.98	-23.79
17235.00	Peak	H	-	-	-71.31	19.74	55.43	68.23	-12.80

Table 7-228. Radiated Measurements CDD Diversity (RU26)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 179 of 383

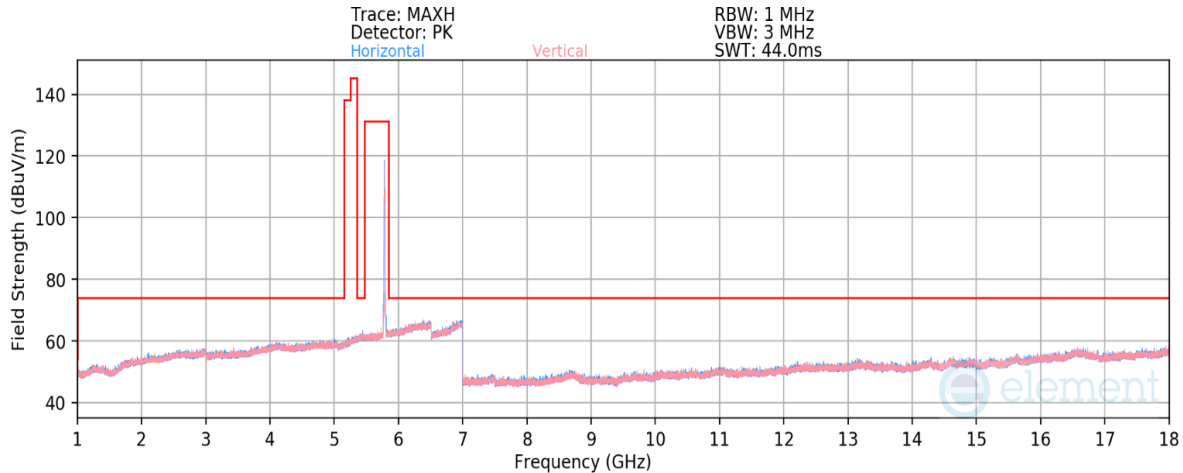

Plot 7-313. Radiated Spurious Emissions above 1 GHz CDD Diversity (11be – Ch.157 – RU26)

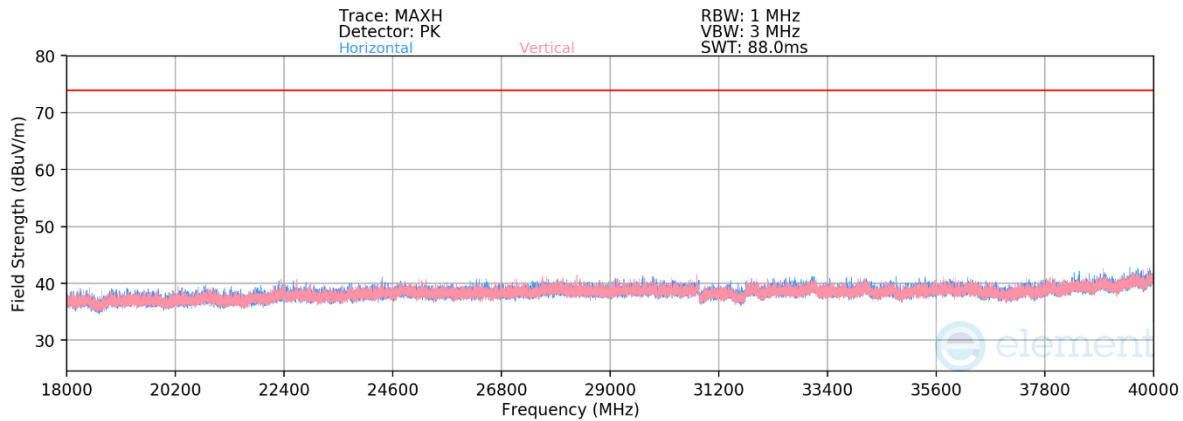

Plot 7-314. Radiated Spurious Emissions 18 GHz - 40 GHz CDD Diversity (11be Ch.157 — RU26)

Mode: 802.11be (20 MHz BW)

Data Rate: MCS0

RU Index: 4

Distance of Measurements: 3 Meters


Operating Frequency: 5785 MHz

Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11570.00	Average	V	-	-	-80.60	13.90	0.00	40.30	53.98	-13.68
* 11570.00	Peak	V	-	-	-69.32	13.90	0.00	51.58	73.98	-22.40
17355.00	Peak	V	-	-	-71.31	19.71	0.00	55.40	68.23	-12.83
23140.00	Average	V	-	-	-51.60	-5.67	-9.54	40.19	68.23	-28.04
28925.00	Peak	V	-	-	-53.94	-2.80	-9.54	40.72	68.23	-27.51
34710.00	Peak	V	-	-	-50.84	-4.48	-9.54	42.14	68.23	-26.09

Table 7-229. Radiated Measurements CDD Diversity (RU26)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 180 of 383

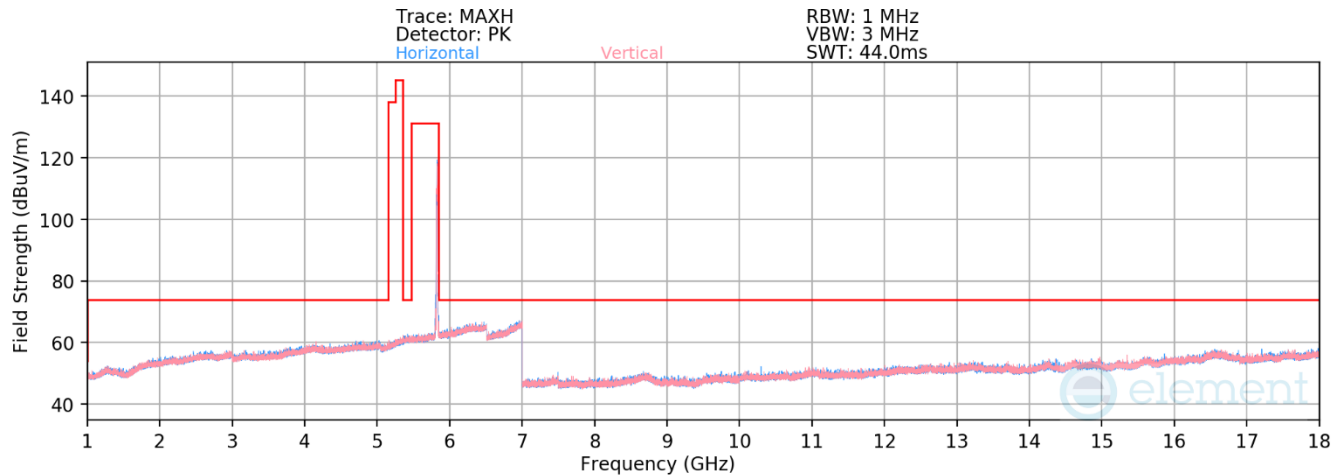

Plot 7-315. Radiated Spurious Emissions above 1 GHz CDD Diversity (11be – Ch.165 – RU26)


Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5825 MHz
Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11650.00	Average	H	-	-	-80.66	13.63	39.97	53.98	-14.01
* 11650.00	Peak	H	-	-	-69.40	13.63	51.23	73.98	-22.75
17475.00	Peak	V	-	-	-72.20	20.79	55.60	68.23	-12.63

Table 7-230. Radiated Measurements CDD Diversity (RU26)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

RU242

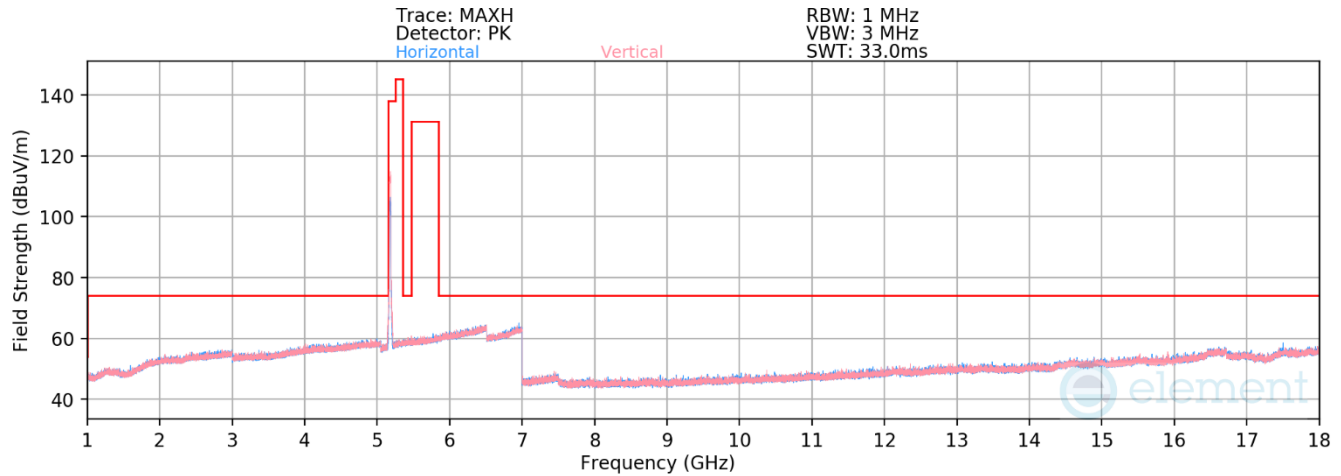


Plot 7-316. Radiated Spurious Emissions above 1 GHz CDD Diversity (11be – Ch.36 – RU242)

Mode: 11be (20 MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5180 MHz
Channel: 36


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10360.00	Peak	H	-	-	-67.66	9.31	48.65	68.23	-19.58
* 15540.00	Average	H	-	-	-80.02	14.78	41.76	53.98	-12.22
* 15540.00	Peak	H	-	-	-68.63	14.78	53.15	73.98	-20.83

Table 7-231. Radiated Measurements CDD Diversity (RU242)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 182 of 383

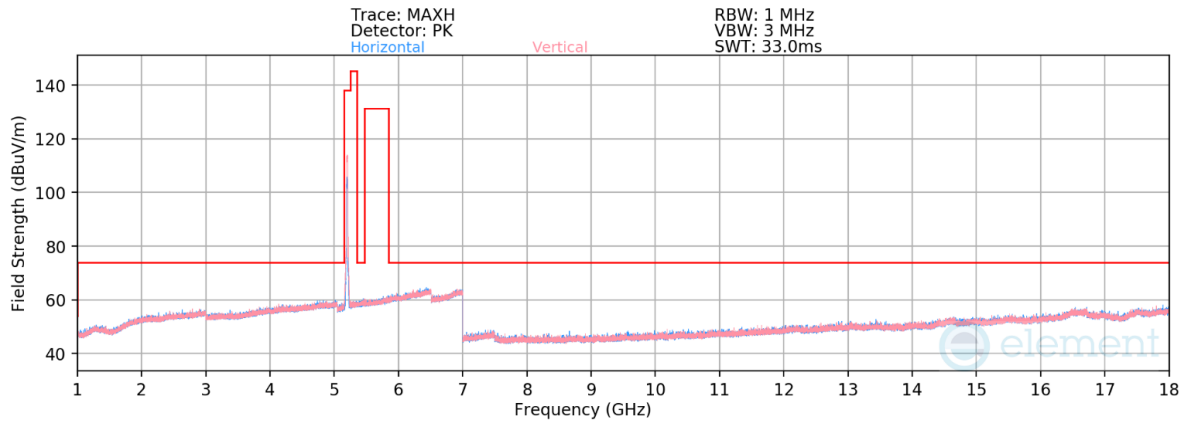

Plot 7-317. Radiated Spurious Emissions above 1 GHz CDD Diversity (11be – Ch.40 – RU242)

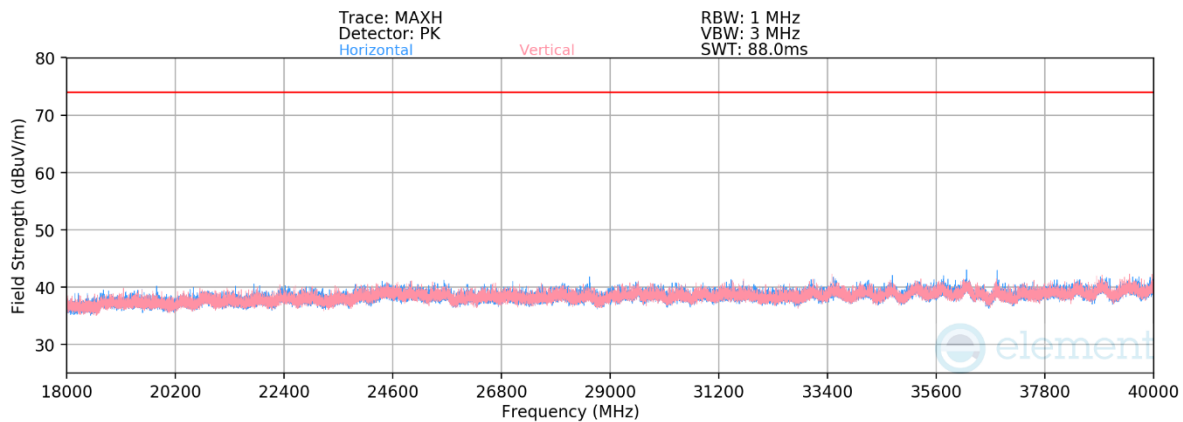


Plot 7-318. Radiated Spurious Emissions 18 GHz - 40 GHz CDD Diversity (11be Ch.40 — RU242)

Mode:	802.11be (20 MHz BW)
Data Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5200 MHz
Channel:	40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10400.00	Peak	V	-	-	-67.95	9.47	0.00	48.52	68.23	-19.71
* 15600.00	Average	H	-	-	-79.82	14.85	0.00	42.03	53.98	-11.95
* 15600.00	Peak	H	-	-	-68.74	14.85	0.00	53.11	73.98	-20.87
* 20800.00	Average	H	-	-	-62.55	-5.90	-9.54	29.01	53.98	-24.97
* 20800.00	Peak	H	-	-	-51.38	-5.90	-9.54	40.18	73.98	-33.80
26000.00	Peak	V	-	-	-53.07	-4.35	-9.54	40.04	68.23	-28.19
* 31200.00	Average	H	-	-	-64.78	-2.74	-9.54	29.94	53.98	-24.04
* 31200.00	Peak	H	-	-	-53.13	-2.74	-9.54	41.59	73.98	-32.39

Table 7-232. Radiated Measurements CDD Diversity (RU242)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 183 of 383

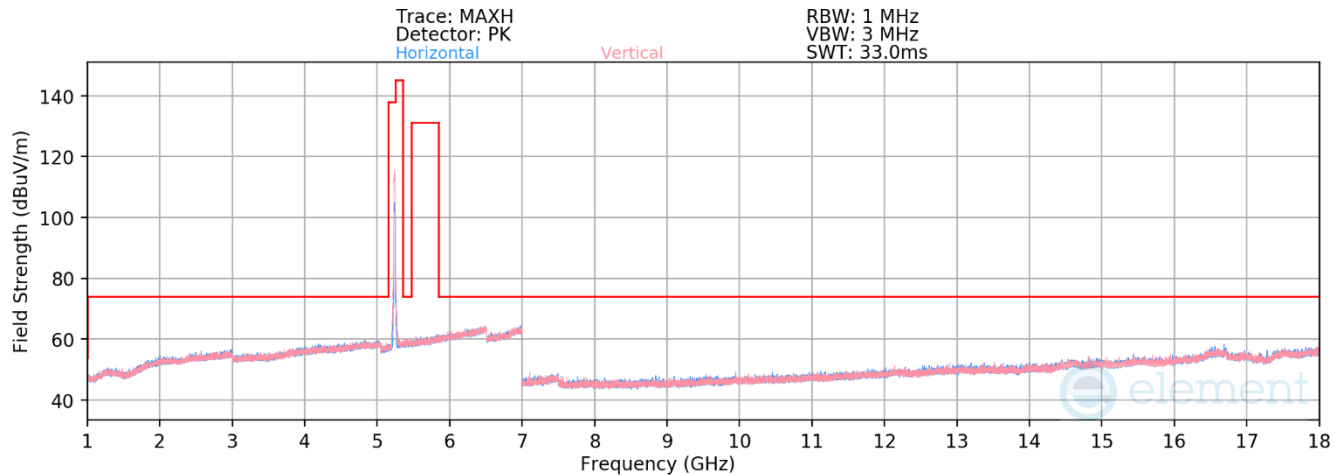

Plot 7-319. Radiated Spurious Emissions above 1 GHz CDD Diversity (11be – Ch.48 – RU242)

Mode: 802.11be (20 MHz BW)

Data Rate: MCS0

RU Index: 61

Distance of Measurements: 3 Meters


Operating Frequency: 5240 MHz

Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10480.00	Peak	V	-	-	-67.78	9.42	48.64	68.23	-19.59
* 15720.00	Average	H	-	-	-79.78	14.49	41.71	53.98	-12.27
* 15720.00	Peak	H	-	-	-68.70	14.49	52.79	73.98	-21.19

Table 7-233. Radiated Measurements CDD Diversity (RU242)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 184 of 383

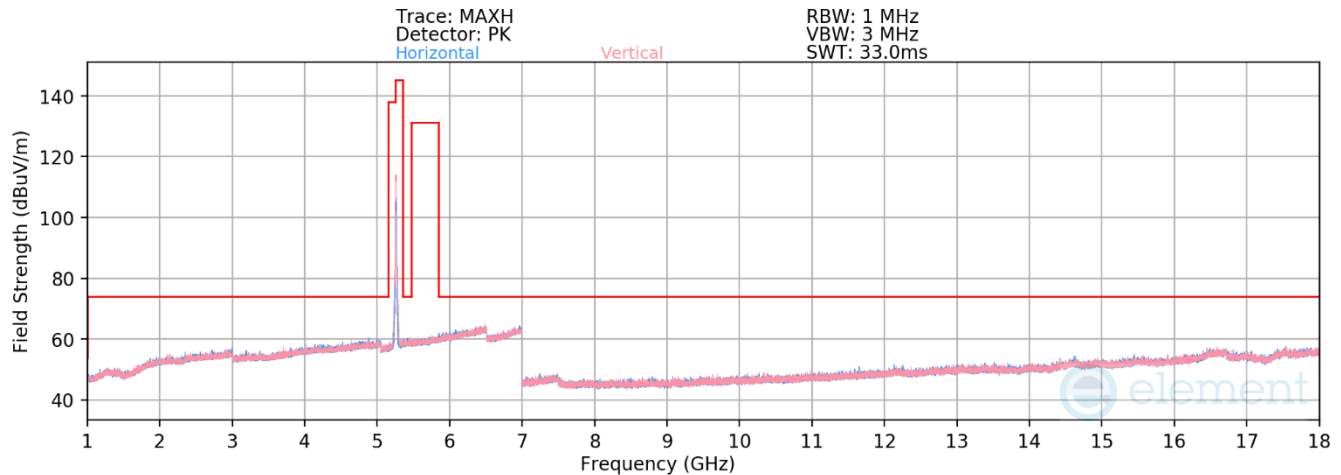


Plot 7-320. Radiated Spurious Emissions above 1 GHz CDD Diversity (11be – Ch.52 – RU242)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5260 MHz
Channel: 52


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10520.00	Peak	V	-	-	-67.89	9.46	48.57	68.23	-19.66
15780.00	Average	V	-	-	-79.33	14.51	42.17	53.98	-11.81
15780.00	Peak	V	-	-	-68.20	14.51	53.31	73.98	-20.67

Table 7-234. Radiated Measurements CDD Diversity (RU242)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 185 of 383

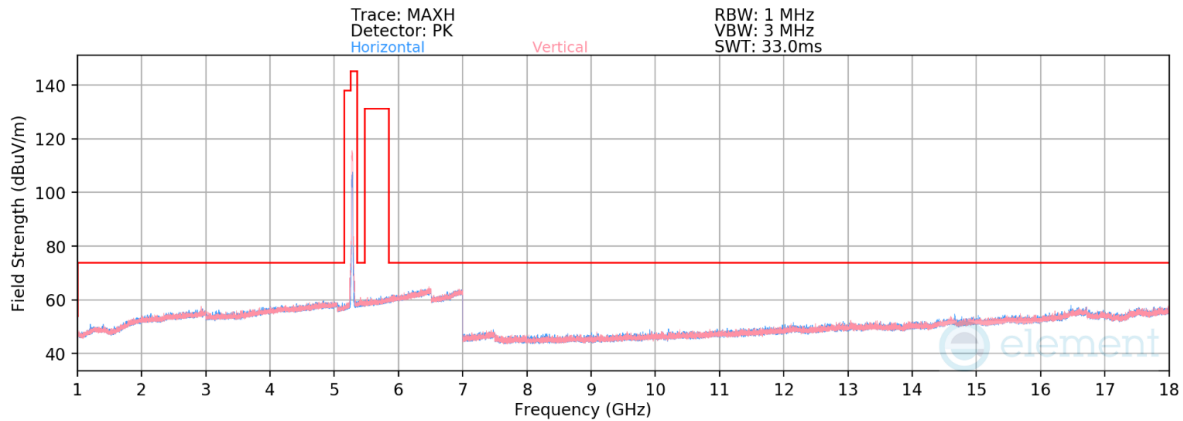

Plot 7-321. Radiated Spurious Emissions above 1 GHz CDD Diversity (11be – Ch.56 – RU242)

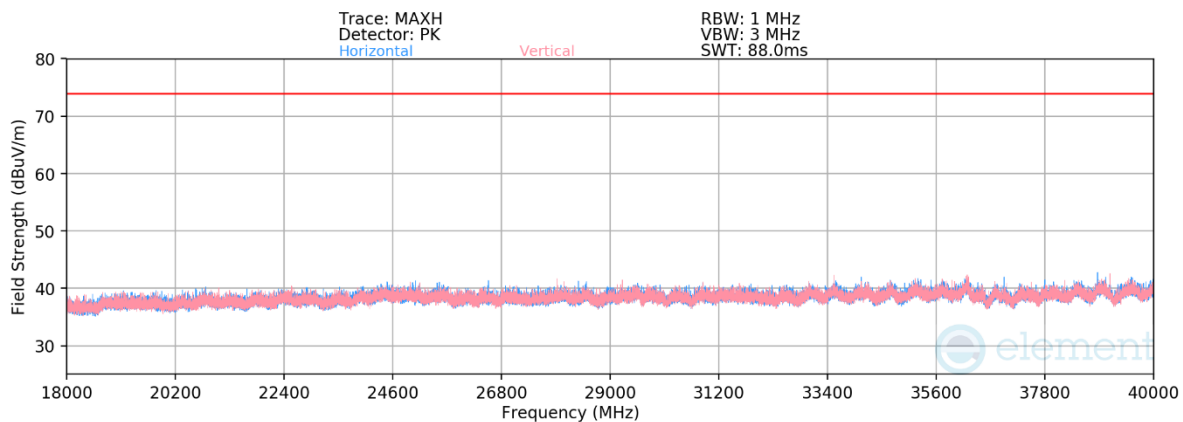

Plot 7-322. Radiated Spurious Emissions 18 GHz - 40 GHz CDD Diversity (11be Ch.56 — RU242)

Mode: 802.11be (20 MHz BW)

Data Rate: MCS0

RU Index: 61

Distance of Measurements: 3 Meters


Operating Frequency: 5280 MHz

Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10560.00	Peak	V	-	-	-68.29	9.64	0.00	48.35	68.23	-19.88
* 15840.00	Average	V	-	-	-79.40	14.73	0.00	42.33	53.98	-11.65
* 15840.00	Peak	V	-	-	-68.78	14.73	0.00	52.95	73.98	-21.03
* 21120.00	Average	H	-	-	-63.07	-6.08	-9.54	28.31	53.98	-25.67
* 21120.00	Peak	H	-	-	-51.34	-6.08	-9.54	40.04	73.98	-33.94
26400.00	Peak	H	-	-	-52.95	-4.04	-9.54	40.47	68.23	-27.76
* 31680.00	Average	H	-	-	-64.74	-2.78	-9.54	29.94	53.98	-24.04
* 31680.00	Peak	H	-	-	-53.33	-2.76	-9.54	41.37	73.98	-32.61

Table 7-235. Radiated Measurements CDD Diversity (RU242)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 186 of 383

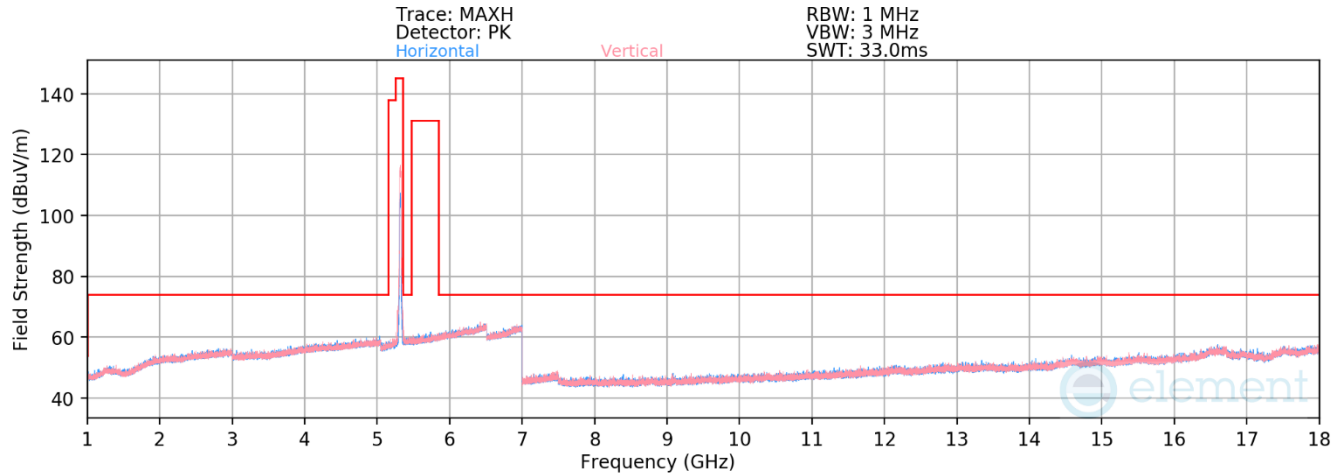


Plot 7-323. Radiated Spurious Emissions above 1 GHz CDD Diversity (11be – Ch.64 – RU242)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5320 MHz
Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	H	-	-	-79.03	9.65	37.62	53.98	-16.36
* 10640.00	Peak	H	-	-	-67.89	9.65	48.77	73.98	-25.21
* 15960.00	Average	V	-	-	-79.30	14.74	42.43	53.98	-11.55
* 15960.00	Peak	V	-	-	-67.99	14.74	53.75	73.98	-20.23

Table 7-236. Radiated Measurements CDD Diversity (RU242)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 187 of 383

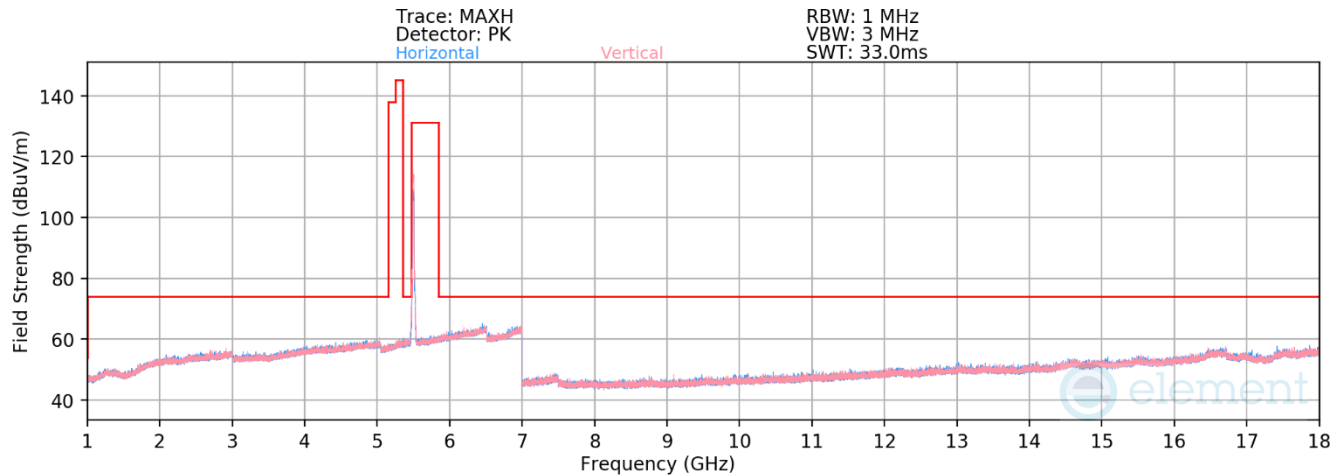


Plot 7-324. Radiated Spurious Emissions above 1 GHz CDD Diversity (11be – Ch.100 – RU242)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5500 MHz
Channel: 100


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
11000.00	Average	H	-	-	-78.94	10.22	38.28	53.98	-15.70
11000.00	Peak	H	-	-	-67.69	10.22	49.53	73.98	-24.45
16500.00	Peak	H	-	-	-68.96	17.62	55.66	68.23	-12.57

Table 7-237. Radiated Measurements CDD Diversity (RU242)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 188 of 383

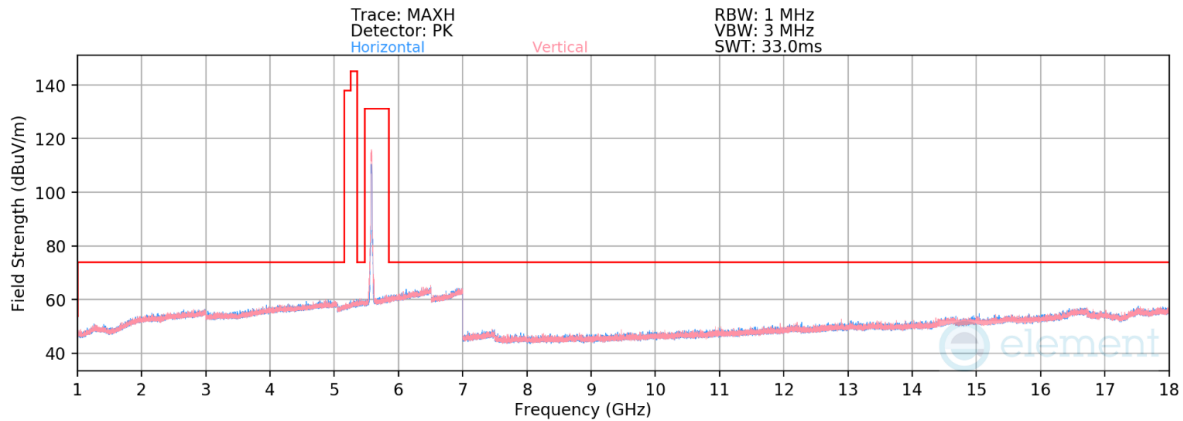

Plot 7-325. Radiated Spurious Emissions above 1 GHz CDD Diversity (11be – Ch.116 – RU242)

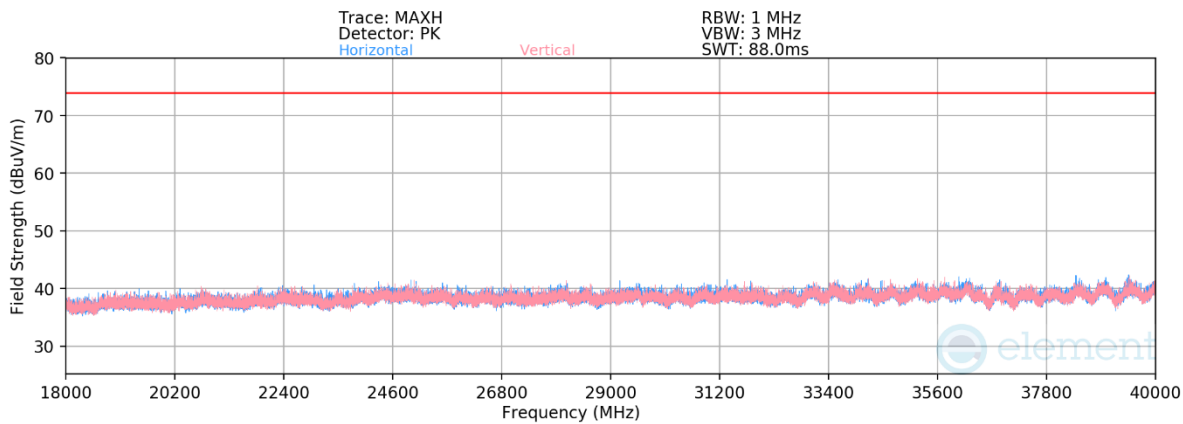


Plot 7-326. Radiated Spurious Emissions 18 GHz - 40 GHz CDD Diversity (11be Ch.116 — RU242)

Mode:	802.11be (20 MHz BW)
Data Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5580 MHz
Channel:	116

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11160.00	Average	V	-	-	-78.98	10.06	0.00	38.09	53.98	-15.89
*	11160.00	Peak	V	-	-	-68.17	10.06	0.00	48.89	73.98	-25.09
	16740.00	Peak	H	-	-	-67.53	16.94	0.00	56.41	68.23	-11.82
*	22320.00	Average	H	-	-	-62.46	-5.49	-9.54	29.51	53.98	-24.47
*	22320.00	Peak	H	-	-	-51.51	-5.49	-9.54	40.46	73.98	-33.52
	27900.00	Peak	V	-	-	-53.98	-2.91	-9.54	40.57	68.23	-27.66
	33480.00	Peak	V	-	-	-52.63	-3.59	-9.54	41.24	68.23	-26.99

Table 7-238. Radiated Measurements CDD Diversity (RU242)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 189 of 383

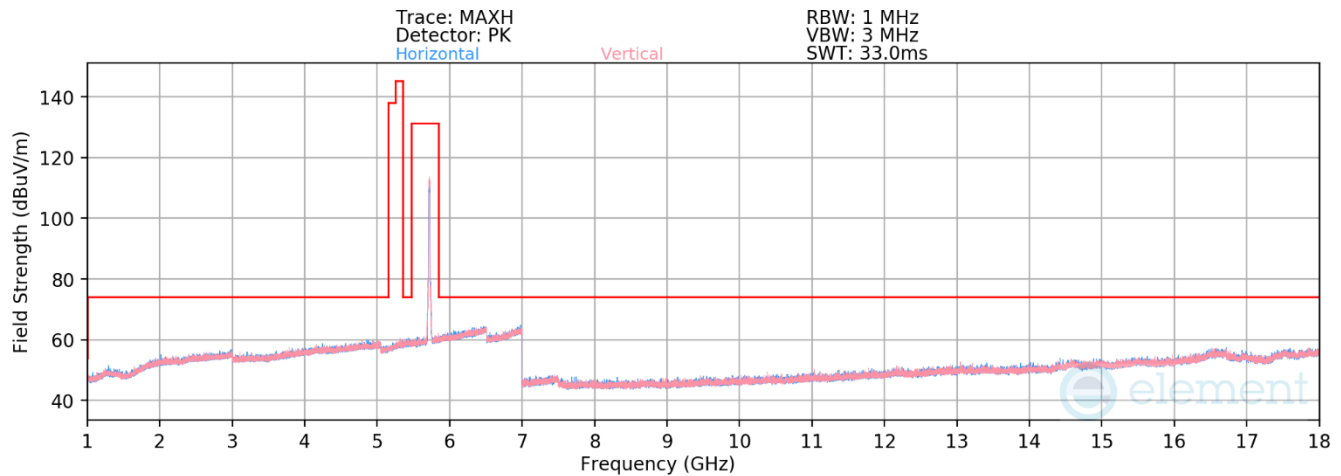


Plot 7-327. Radiated Spurious Emissions above 1 GHz CDD Diversity (11be – Ch.144 – RU242)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5720 MHz
Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11440.00	Average	H	-	-	-78.98	10.58	38.60	53.98	-15.38
* 11440.00	Peak	H	-	-	-67.90	10.58	49.68	73.98	-24.30
17160.00	Peak	V	-	-	-70.03	17.98	54.95	68.23	-13.28

Table 7-239. Radiated Measurements CDD Diversity (RU242)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 190 of 383

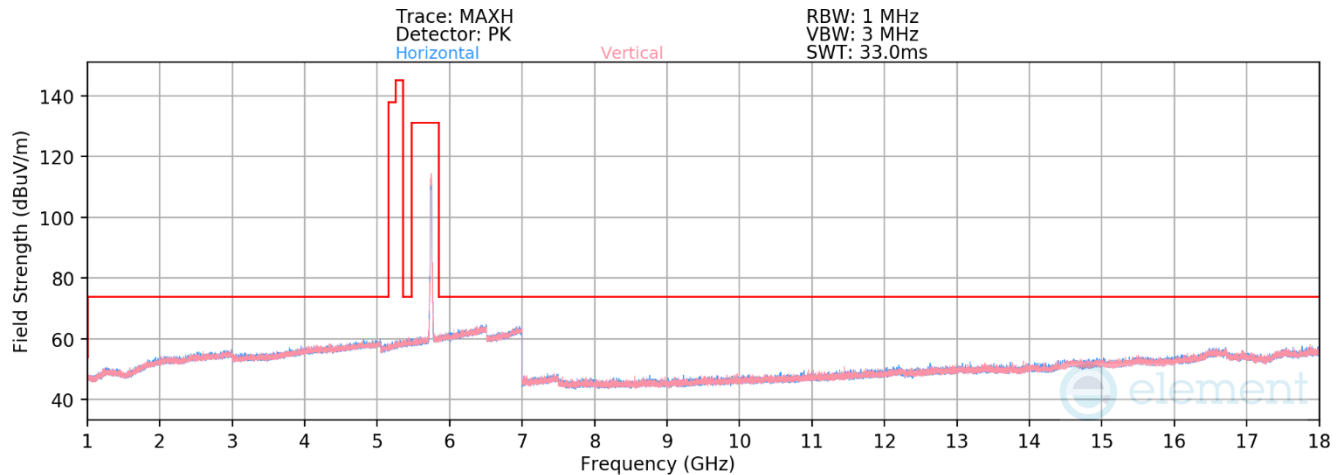


Plot 7-328. Radiated Spurious Emissions above 1 GHz CDD Diversity (11be – Ch.149 – RU242)

Mode:	802.11be (20 MHz BW)
Data Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5745 MHz
Channel:	149


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11490.00	Average	H	-	-	-78.94	10.61	38.66	53.98	-15.32
*	11490.00	Peak	H	-	-	-68.26	10.61	49.35	73.98	-24.63
	17235.00	Peak	V	-	-	-70.43	17.67	54.25	68.23	-13.98

Table 7-240. Radiated Measurements CDD Diversity (RU242)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 191 of 383

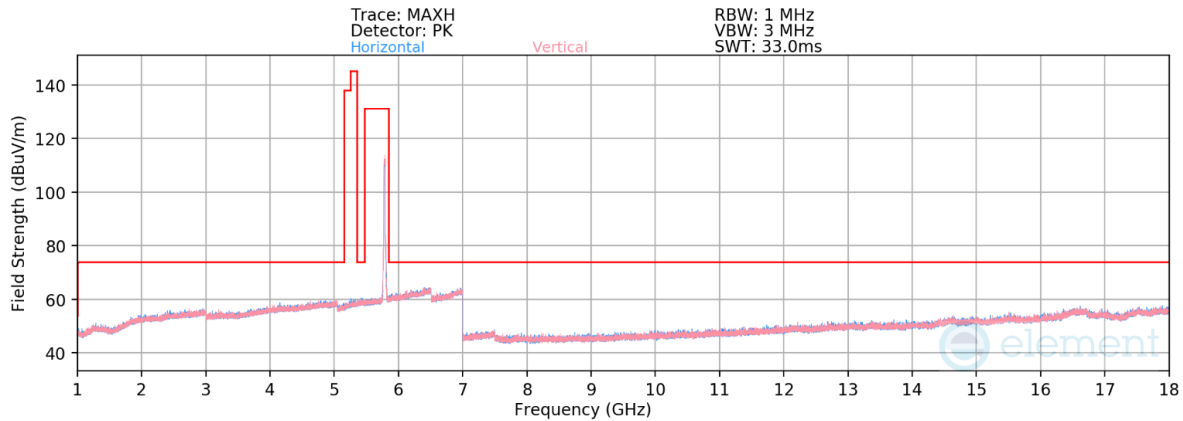

Plot 7-329. Radiated Spurious Emissions above 1 GHz CDD Diversity (11be - Ch.157 - RU242)

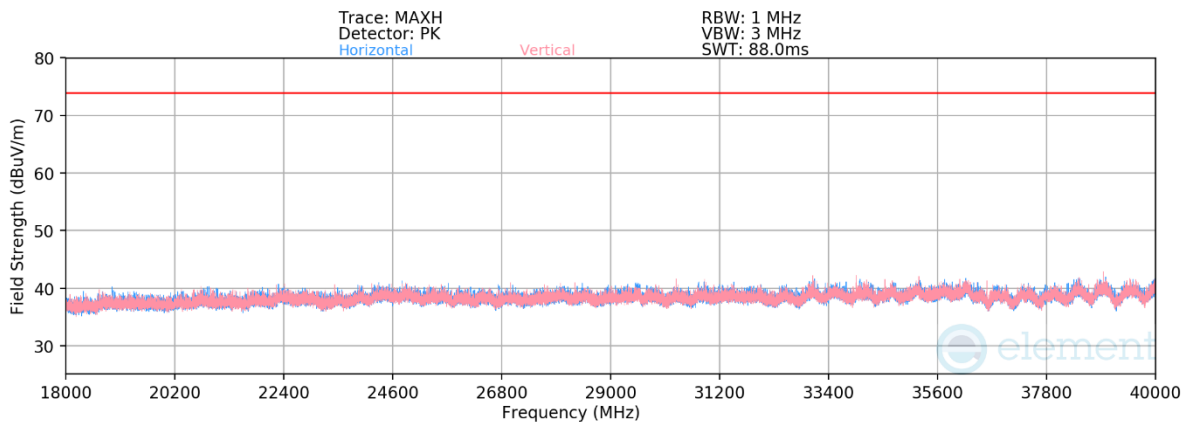


Plot 7-330. Radiated Spurious Emissions 18 GHz - 40 GHz CDD Diversity (11be Ch.157 - RU242)

Mode:	802.11be (20 MHz BW)
Data Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5785 MHz
Channel:	157

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11570.00	Average	H	-	-	-79.06	10.76	0.00	38.70	53.98	-15.28
*	11570.00	Peak	H	-	-	-68.54	10.76	0.00	49.21	73.98	-24.77
	17355.00	Peak	V	-	-	-69.46	18.21	0.00	55.76	68.23	-12.47
	23140.00	Peak	H	-	-	-52.01	-5.65	-9.54	39.80	68.23	-28.43
	28925.00	Peak	H	-	-	-53.45	-2.88	-9.54	41.13	68.23	-27.10
	34710.00	Peak	V	-	-	-50.99	-4.48	-9.54	41.99	68.23	-26.24

Table 7-241. Radiated Measurements CDD Diversity (RU242)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 192 of 383

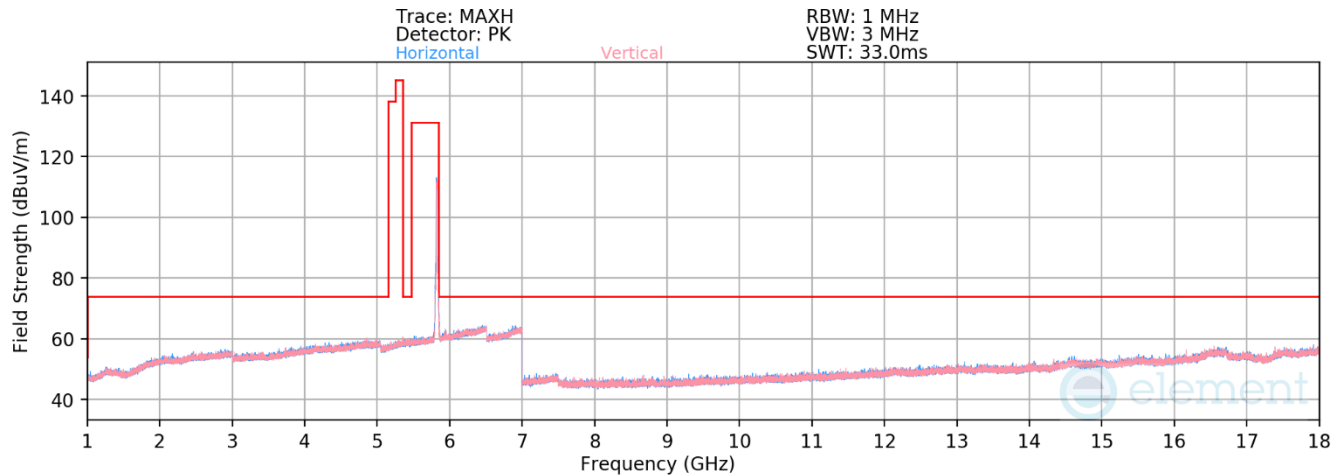

Plot 7-331. Radiated Spurious Emissions above 1 GHz CDD Diversity (11be – Ch.165 – RU242)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5825 MHz
Channel: 165


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	V	-	-	-79.36	10.74	38.38	53.98	-15.60
* 11650.00	Peak	V	-	-	-68.20	10.74	49.55	73.98	-24.43
17475.00	Peak	V	-	-	-71.31	20.51	56.20	68.23	-12.03

Table 7-242. Radiated Measurements CDD Diversity (RU242)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 193 of 383

7.6.3 Antenna WF5T Radiated Band Edge Measurements (20 MHz BW)


RU26 / RU52

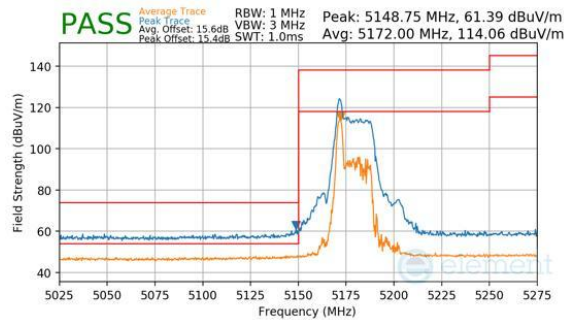


Plot 7-332. Antenna WF5T (Peak & Average, RU26, Index 0, Ch.36, MCS11)

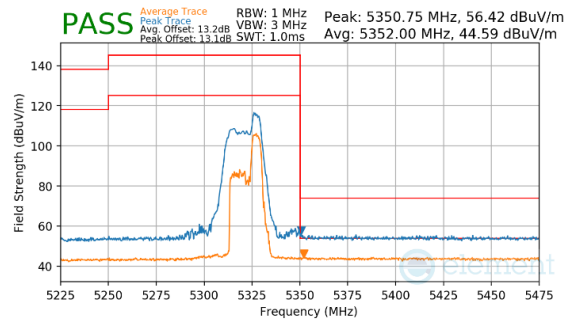


Plot 7-335. Antenna WF5T (Peak & Average, RU52, Index 40, Ch.64, MCS11)

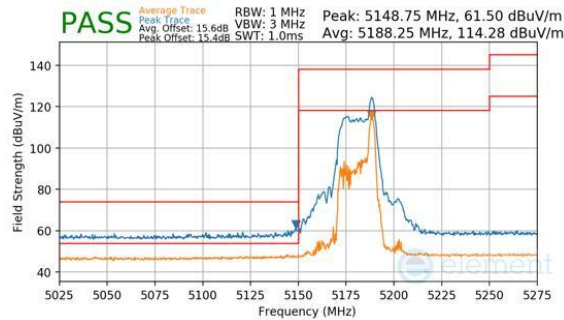


Plot 7-333. Antenna WF5T (Peak & Average, RU26, Index 8, Ch.36, MCS11)

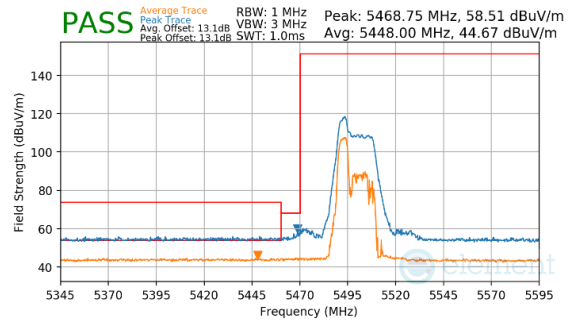

Plot 7-336. Antenna WF5T (Peak & Average, RU52, Index 37, Ch.100, MCS11)

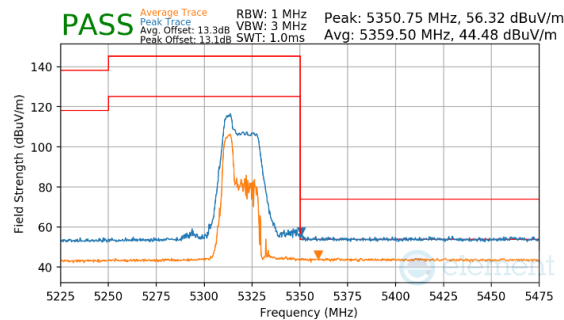


Plot 7-334. Antenna WF5T (Peak & Average, RU52, Index 37, Ch.64, MCS11)

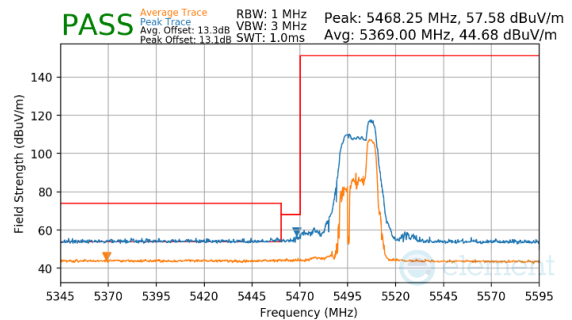


Plot 7-337. Antenna WF5T (Peak & Average, RU52, Index 40, Ch.100, MCS11)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 194 of 383

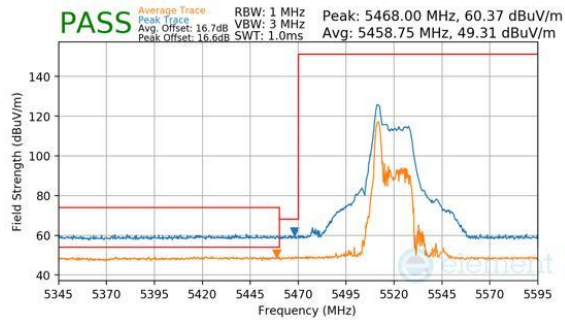


Plot 7-338. Antenna WF5T (Peak & Average, RU26, Index 0, Ch.104, MCS11)

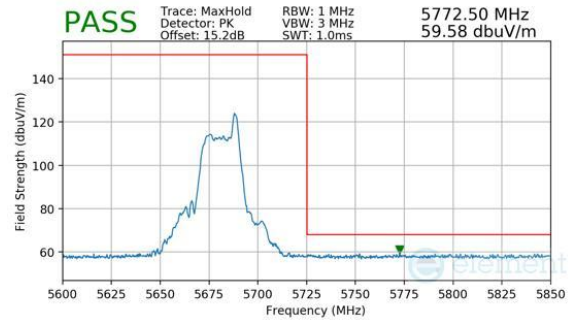


Plot 7-341. Antenna WF5T (Peak, RU26, Index 8, Ch.136, MCS11)

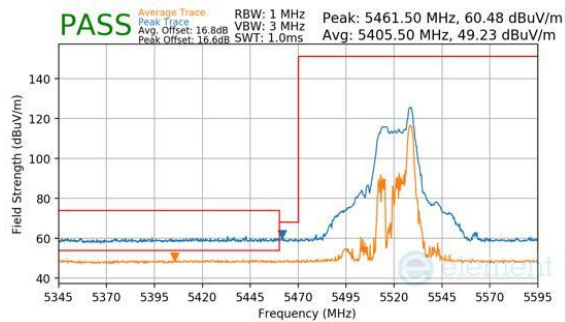


Plot 7-339. Antenna WF5T (Peak & Average, RU26, Index 8, Ch.104, MCS11)

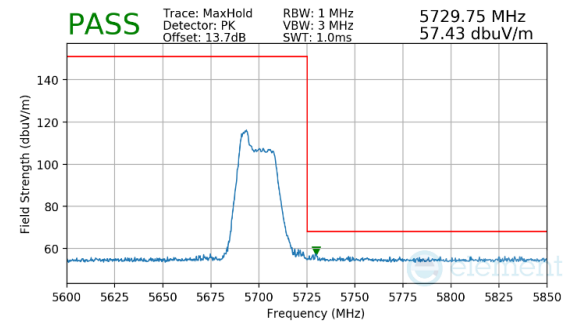

Plot 7-342. Antenna WF5T (Peak, RU52, Index 37, Ch.140, MCS11)

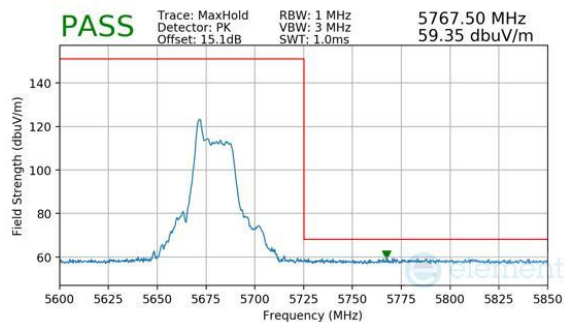


Plot 7-340. Antenna WF5T (Peak, RU26, Index 0, Ch.136, MCS11)

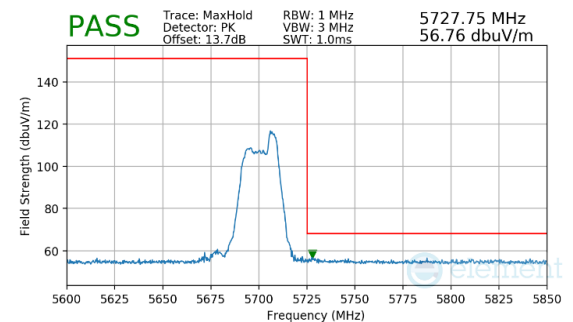


Plot 7-343. Antenna WF5T (Peak, RU52, Index 40, Ch.140, MCS11)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 195 of 383

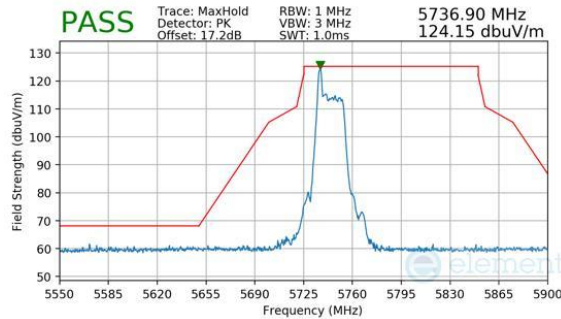


Plot 7-344. Antenna WF5T (Peak, RU26, Index 0, Ch.149, MCS11)

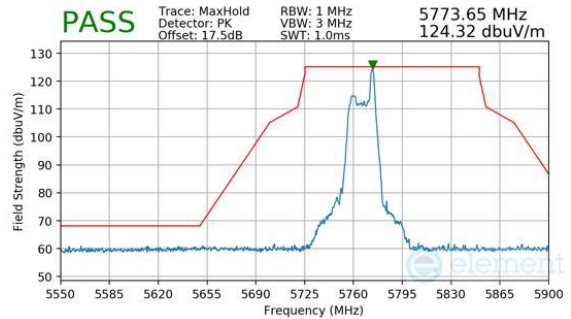


Plot 7-347. Antenna WF5T (Peak, RU26, Index 8, Ch.153, MCS11)

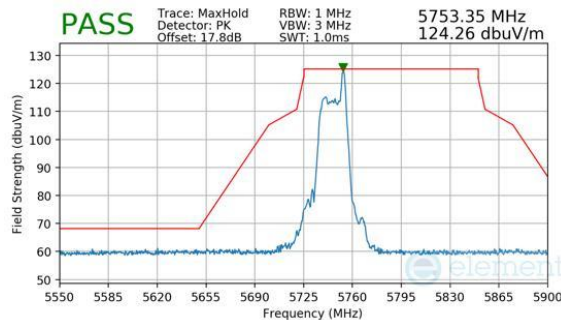


Plot 7-345. Antenna WF5T (Peak, RU26, Index 8, Ch.149, MCS11)

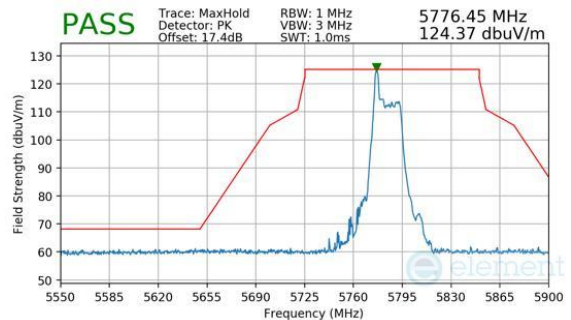

Plot 7-348. Antenna WF5T (Peak, RU26, Index 0, Ch.157, MCS11)

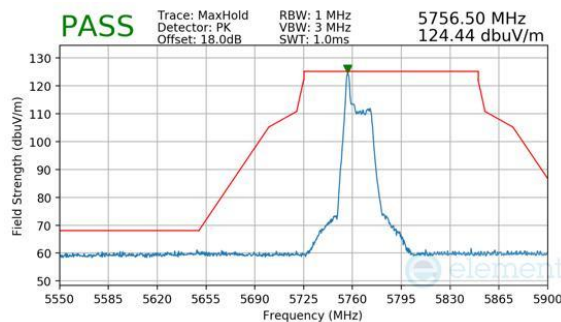


Plot 7-346. Antenna WF5T (Peak, RU26, Index 0, Ch.153, MCS11)

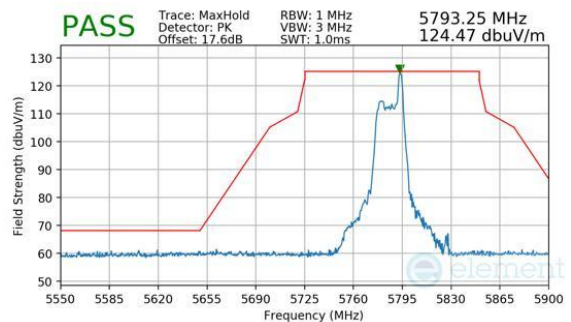


Plot 7-349. Antenna WF5T (Peak, RU26, Index 8, Ch.157, MCS11)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 196 of 383

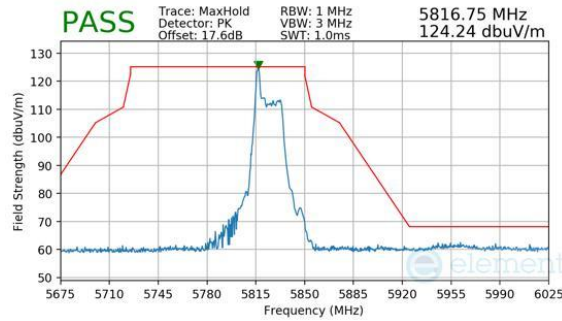


Plot 7-350. Antenna WF5T (Peak, RU26, Index 0, Ch.165, MCS11)

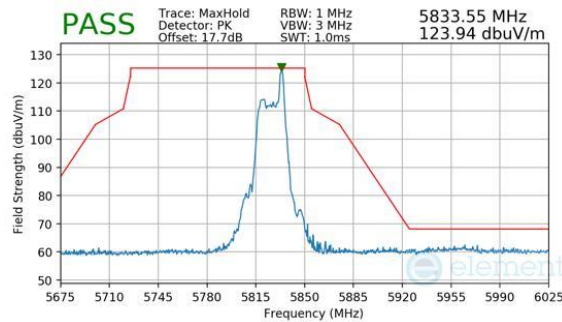


Plot 7-351. Antenna WF5T (Peak, RU26, Index 8, Ch.165, MCS11)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 197 of 383


MRU

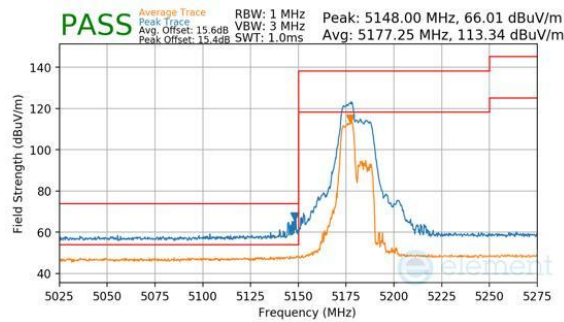


Plot 7-352. Antenna WF5T (Peak & Average, RU52+26, Index 70, Ch.36, MCS11)

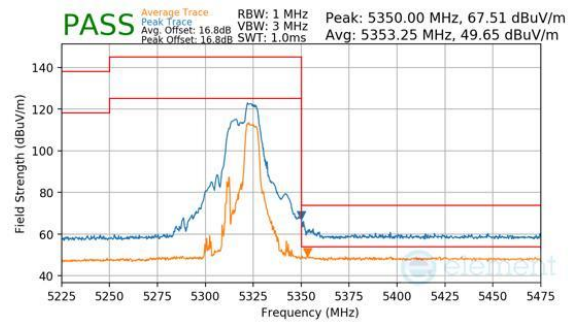


Plot 7-355. Antenna WF5T (Peak & Average, RU52+26, Index 72, Ch.64, MCS11)

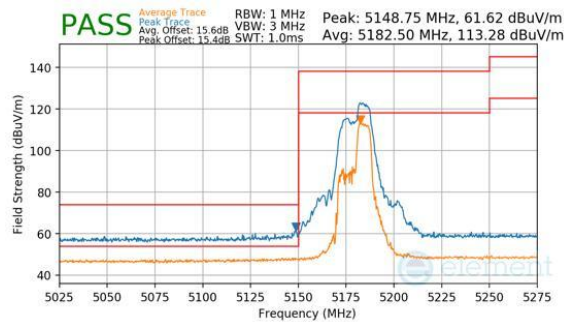


Plot 7-353. Antenna WF5T (Peak & Average, RU52+26, Index 72, Ch.36, MCS11)

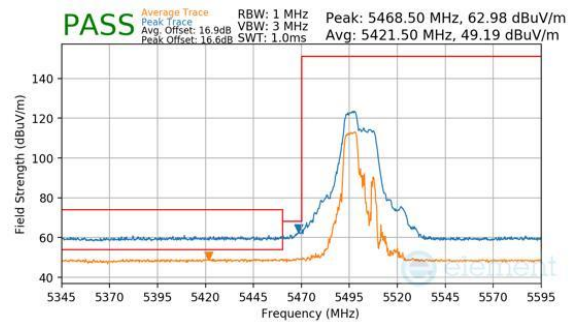

Plot 7-356. Antenna WF5T (Peak & Average, RU52+26, Index 70, Ch.100, MCS11)

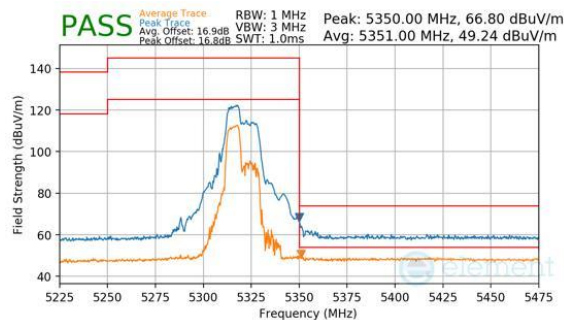


Plot 7-354. Antenna WF5T (Peak & Average, RU52+26, Index 70, Ch.64, MCS11)

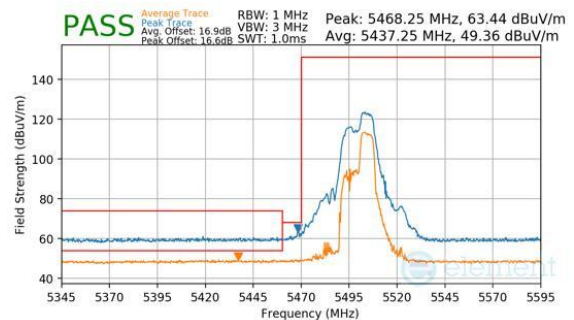


Plot 7-357. Antenna WF5T (Peak & Average, RU52+26, Index 72, Ch.100, MCS11)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 198 of 383

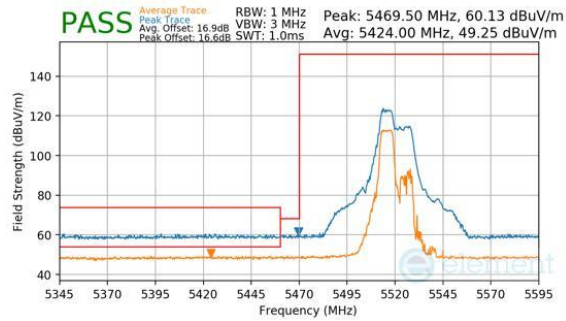


Plot 7-358. Antenna WF5T (Peak & Average, RU52+26, Index 70, Ch.104, MCS11)

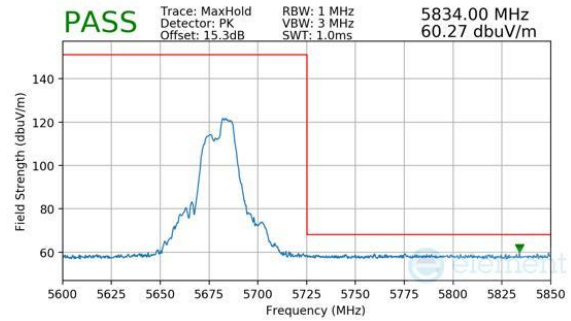


Plot 7-361. Antenna WF5T (Peak, RU52+26, Index 72, Ch.136, MCS11)

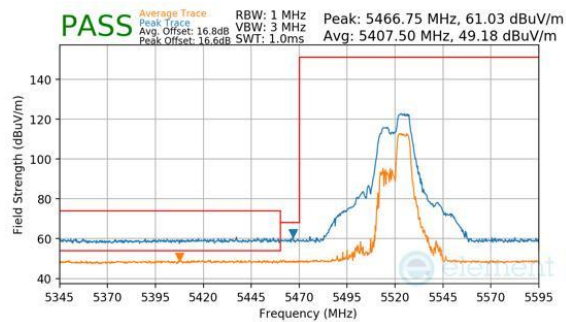


Plot 7-359. Antenna WF5T (Peak & Average, RU52+26, Index 72, Ch.104, MCS11)

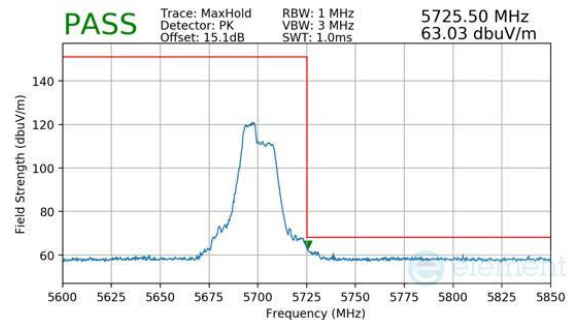

Plot 7-362. Antenna WF5T (Peak, RU52+26, Index 70, Ch.140, MCS11)

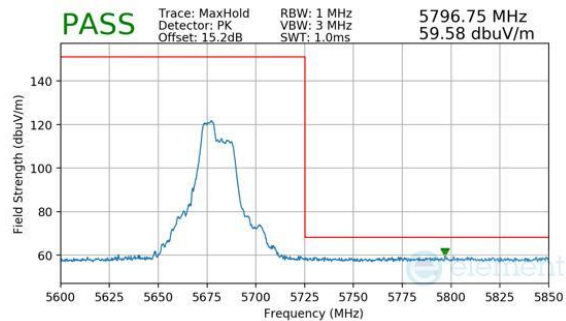


Plot 7-360. Antenna WF5T (Peak, RU52+26, Index 70, Ch.136, MCS11)

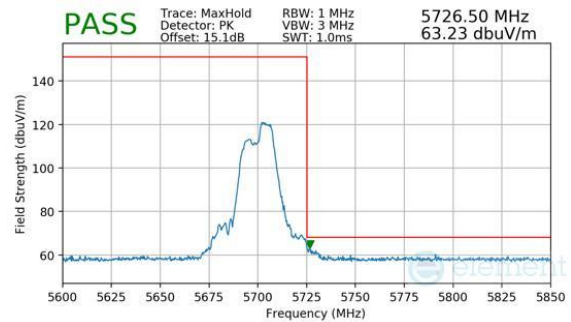


Plot 7-363. Antenna WF5T (Peak, RU52+26, Index 72, Ch.140, MCS11)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 199 of 383

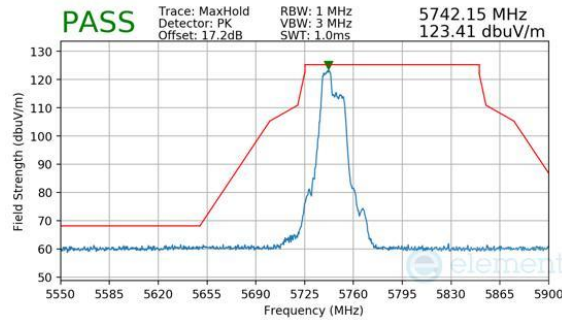


Plot 7-364. Antenna WF5T (Peak, RU52+26, Index 70, Ch.149, MCS11)

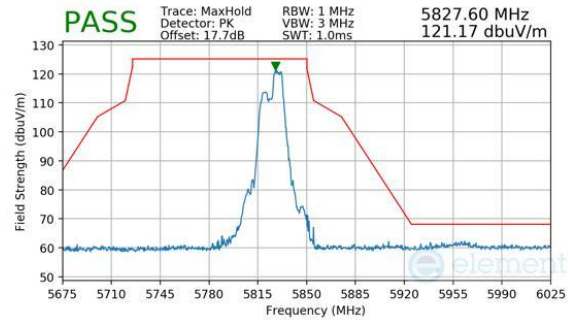

Plot 7-367. Antenna WF5T (Peak, RU52+26, Index 72, Ch.165, MCS11)

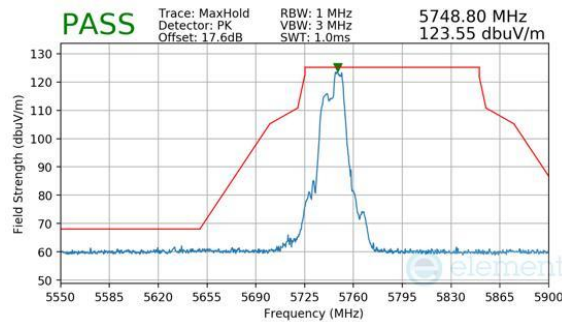

Plot 7-365. Antenna WF5T (Peak, RU52+26, Index 72, Ch.149, MCS11)

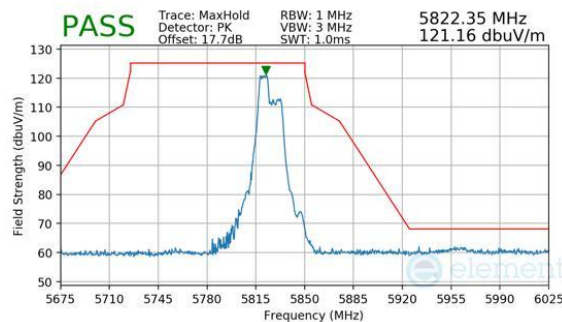

Plot 7-366. Antenna WF5T (Peak, RU52+26, Index 70, Ch.165, MCS11)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 200 of 383