

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamplifier Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$


Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.8.2 to 7.8.4 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 108 of 177

V 11.0 5/2025

7.8.1 CDD Radiated Spurious Emission Measurements

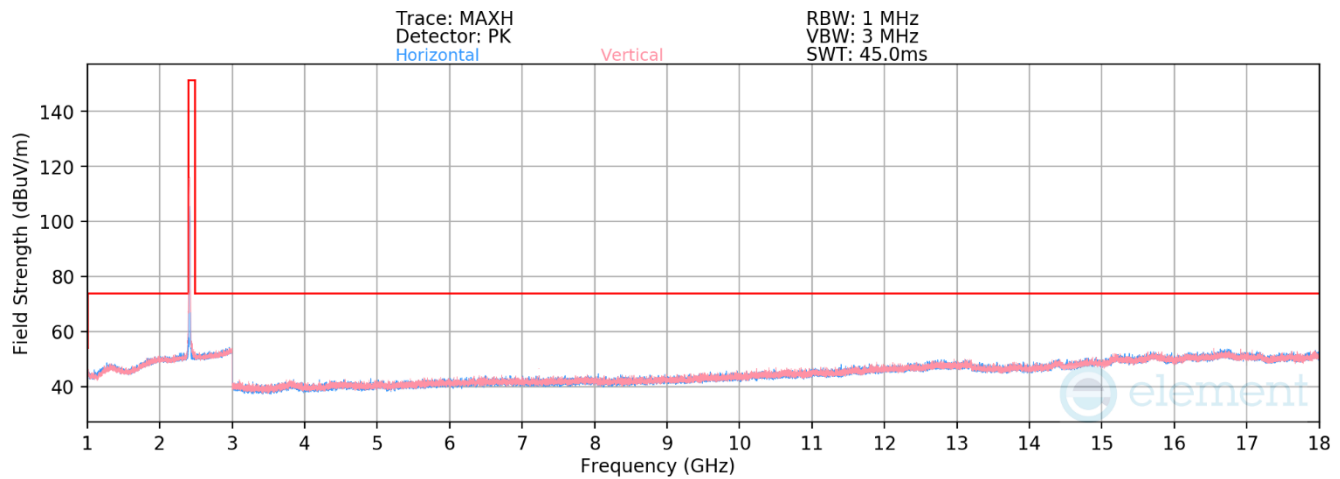


Plot 7-131. Radiated Spurious Emissions Above 1 GHz CDD (802.11b – Ch. 1)

Mode:	802.11b
Data Rate:	11Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2412 MHz
Channel:	01


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4824.00	Average	V	221	150	-75.03	2.34	34.31	53.98	-19.67
4824.00	Peak	V	221	150	-66.58	2.34	42.76	73.98	-31.22
12060.00	Average	H	-	-	-81.33	11.38	37.05	53.98	-16.93
12060.00	Peak	H	-	-	-70.23	11.38	48.15	73.98	-25.83

Table 7-22. Radiated Measurements CDD

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 109 of 177

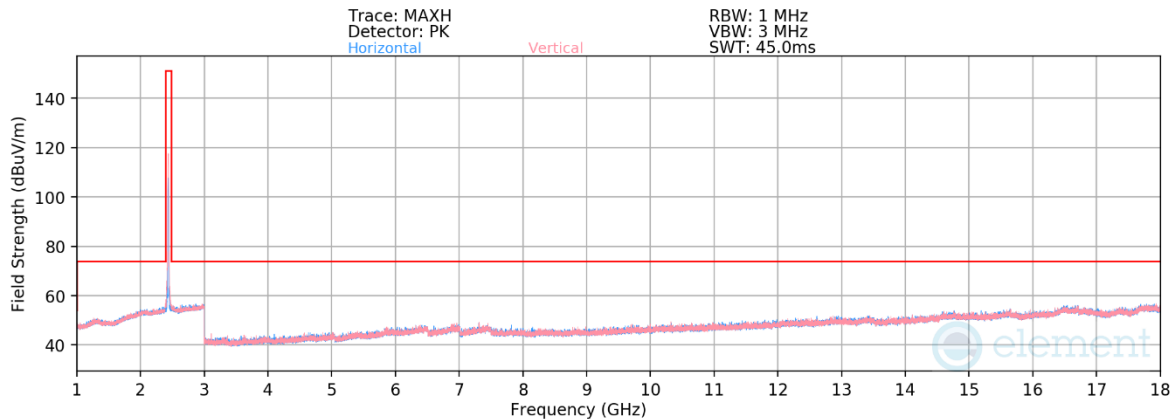

Plot 7-132. Radiated Spurious Emissions Above 1 GHz CDD (802.11b – Ch. 6)

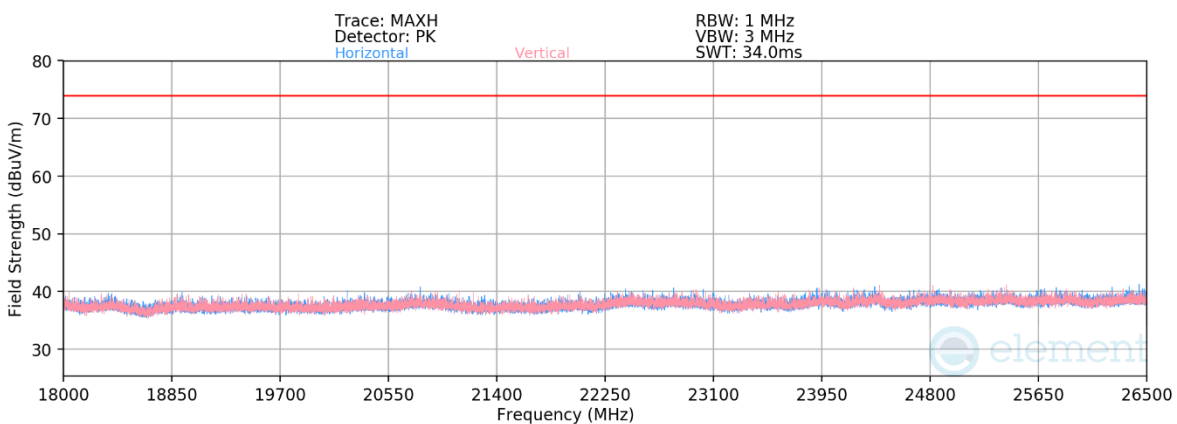


Plot 7-133. Radiated Spurious Emissions Above 18 GHz CDD (802.11b – Ch. 6)

Mode:	802.11b
Data Rate:	11Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2437 MHz
Channel:	06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dBm]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4874.00	Average	V	101	158	-74.95	3.69	0.00	35.73	53.98	-18.25
4874.00	Peak	V	101	158	-65.06	3.69	0.00	45.63	73.98	-28.35
7311.00	Average	V	187	154	-72.68	7.84	0.00	42.16	53.98	-11.82
7311.00	Peak	V	187	154	-64.34	7.84	0.00	50.50	73.98	-23.48
12185.00	Average	H	-	-	-79.03	11.05	0.00	39.01	53.98	-14.97
12185.00	Peak	H	-	-	-67.93	11.05	0.00	50.12	73.98	-23.86
19496.00	Average	V	-	-	-63.19	-6.00	-9.54	28.27	53.98	-25.71
19496.00	Peak	V	-	-	-52.07	-6.00	-9.54	39.39	73.98	-34.59

Table 7-23. Radiated Measurements CDD

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 110 of 177

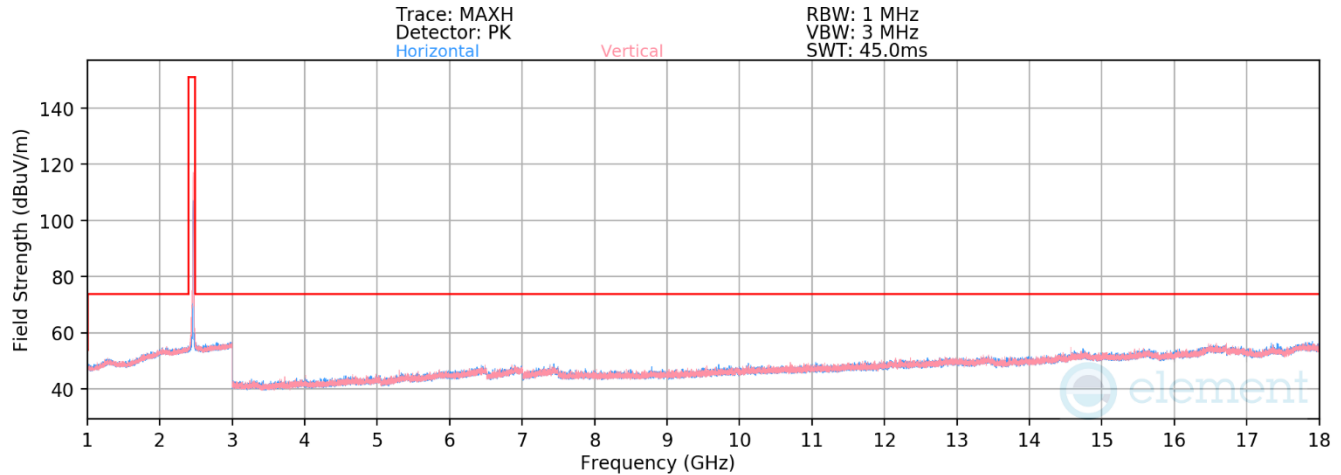


Plot 7-134. Radiated Spurious Emissions Above 1 GHz CDD (802.11b – Ch. 11)

Mode:	802.11b
Data Rate:	11Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2462 MHz
Channel:	11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4924.00	Average	V	-	-	-77.54	3.92	33.38	53.98	-20.60
4924.00	Peak	V	-	-	-66.65	3.92	44.27	73.98	-29.71
7386.00	Average	V	145	178	-74.25	7.68	40.43	53.98	-13.55
7386.00	Peak	V	145	178	-64.54	7.68	50.14	73.98	-23.84
12310.00	Average	H	-	-	-79.29	11.95	39.66	53.98	-14.32
12310.00	Peak	H	-	-	-68.21	11.95	50.74	73.98	-23.24

Table 7-24. Radiated Measurements CDD

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 111 of 177

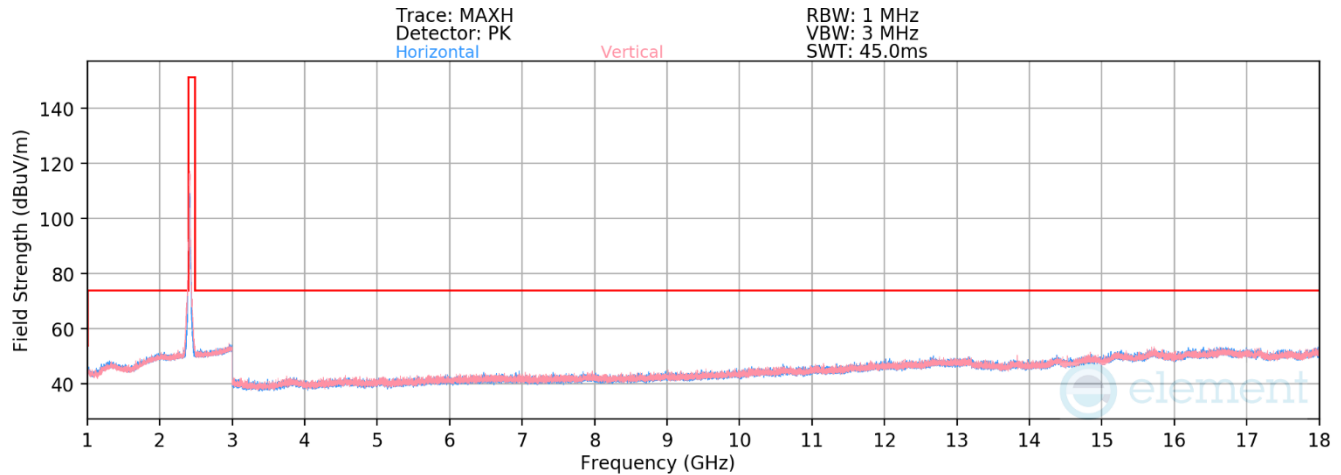


Plot 7-135. Radiated Spurious Emissions Above 1 GHz CDD (802.11n – Ch. 1)

Mode: 802.11n
Data Rate: MCS15
Distance of Measurements: 3 Meters
Operating Frequency: 2412 MHz
Channel: 01


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4824.00	Average	H	-	-	-78.13	2.34	31.21	53.98	-22.77
4824.00	Peak	H	-	-	-66.71	2.34	42.63	73.98	-31.35
12060.00	Average	H	-	-	-81.45	11.31	36.86	53.98	-17.12
12060.00	Peak	H	-	-	-69.94	11.31	48.38	73.98	-25.60

Table 7-25. Radiated Measurements CDD

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 112 of 177

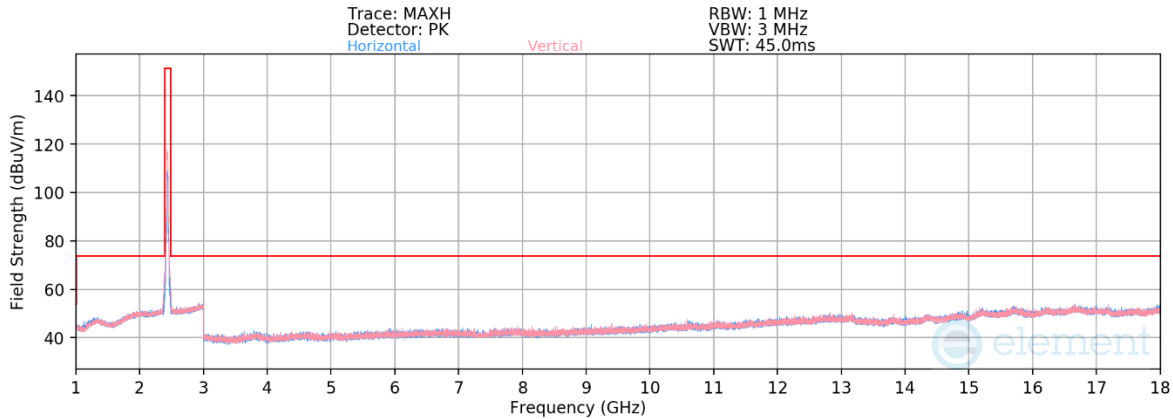

Plot 7-136. Radiated Spurious Emissions Above 1 GHz CDD (802.11n – Ch. 6)

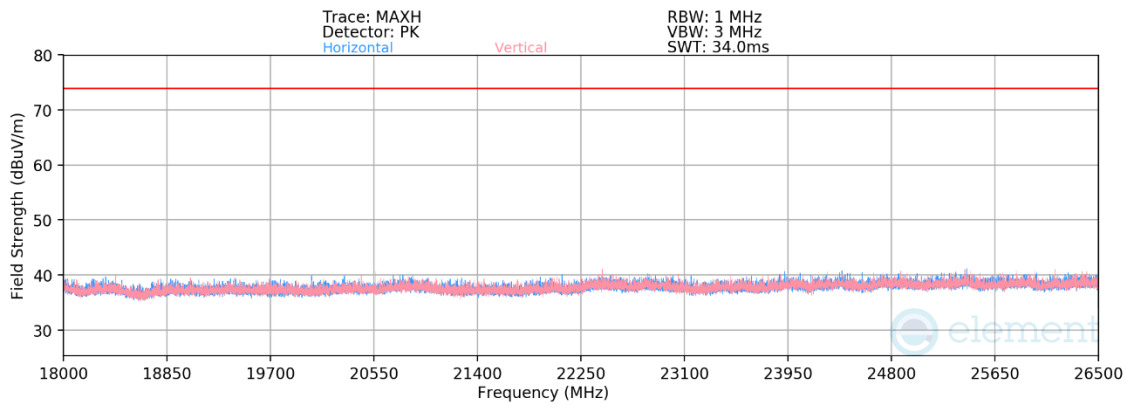

Plot 7-137. Radiated Spurious Emissions Above 18 GHz CDD (802.11n – Ch. 6)

Mode: 802.11n

Data Rate: MCS15

Distance of Measurements: 3 Meters


Operating Frequency: 2437 MHz

Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4874.00	Average	V	-	-	-78.32	2.45	0.00	31.13	53.98	-22.85
4874.00	Peak	V	-	-	-66.61	2.45	0.00	42.85	73.98	-31.13
7311.00	Average	V	108	234	-70.70	5.43	0.00	41.73	53.98	-12.25
7311.00	Peak	V	108	234	-59.06	5.43	0.00	53.37	73.98	-20.61
12185.00	Average	H	-	-	-81.58	11.60	0.00	37.01	53.98	-16.97
12185.00	Peak	H	-	-	-70.23	11.60	0.00	48.37	73.98	-25.61
19496.00	Average	V	-	-	-63.19	-6.00	-9.54	28.27	53.98	-25.71
19496.00	Peak	V	-	-	-52.07	-6.00	-9.54	39.39	73.98	-34.59

Table 7-26. Radiated Measurements CDD

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

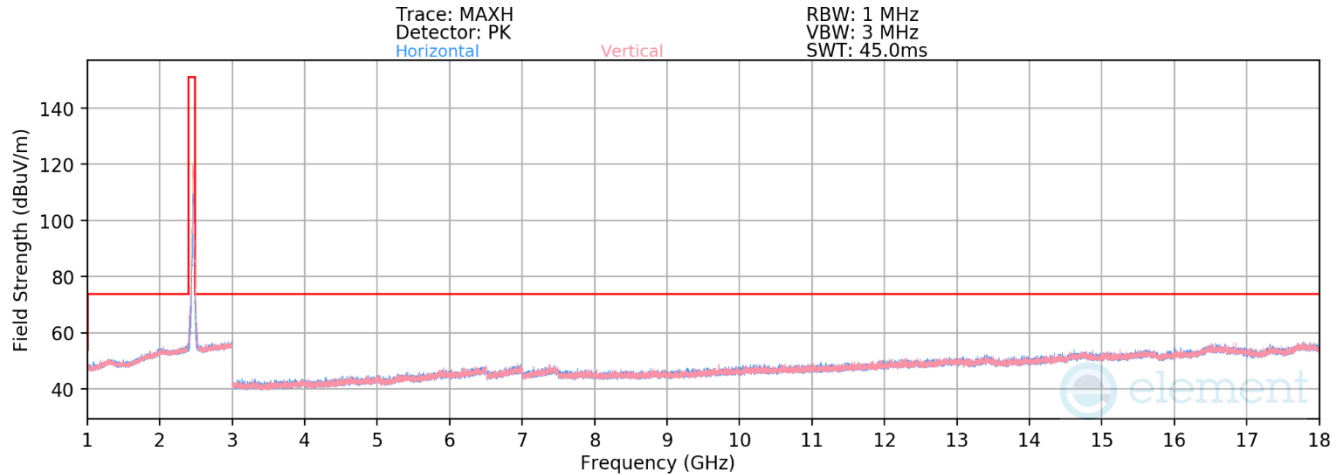


Plot 7-138. Radiated Spurious Emissions Above 1 GHz CDD (802.11n – Ch. 11)

Mode: 802.11n
Data Rate: MCS15
Distance of Measurements: 3 Meters
Operating Frequency: 2462 MHz
Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4924.00	Average	H	-	-	-77.61	3.72	33.11	53.98	-20.87
4924.00	Peak	H	-	-	-65.92	3.72	44.80	73.98	-29.18
7386.00	Average	V	176	153	-74.07	7.68	40.61	53.98	-13.37
7386.00	Peak	V	176	153	-62.48	7.68	52.20	73.98	-21.78
12310.00	Average	H	-	-	-79.34	11.94	39.60	53.98	-14.38
12310.00	Peak	H	-	-	-68.19	11.94	50.75	73.98	-23.23

Table 7-27. Radiated Measurements CDD

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 114 of 177

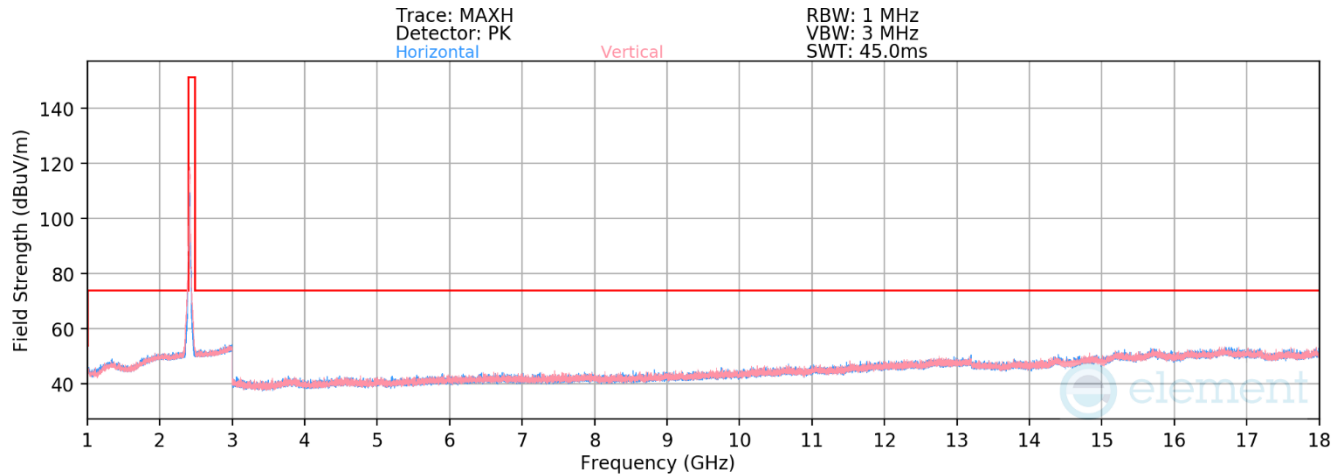


Plot 7-139. Radiated Spurious Emissions above 1 GHz CDD (802.11be (SU) – Ch. 1)

Mode: 802.11be (SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 2412 MHz
Channel: 01


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Average	H	-	-	-78.22	2.33	31.11	53.98	-22.87
4824.00	Peak	H	-	-	-66.34	2.33	42.99	73.98	-30.99
12060.00	Average	H	-	-	-81.53	11.41	36.88	53.98	-17.10
12060.00	Peak	H	-	-	-70.02	11.41	48.39	73.98	-25.59

Table 7-28. Radiated Measurements CDD

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 115 of 177

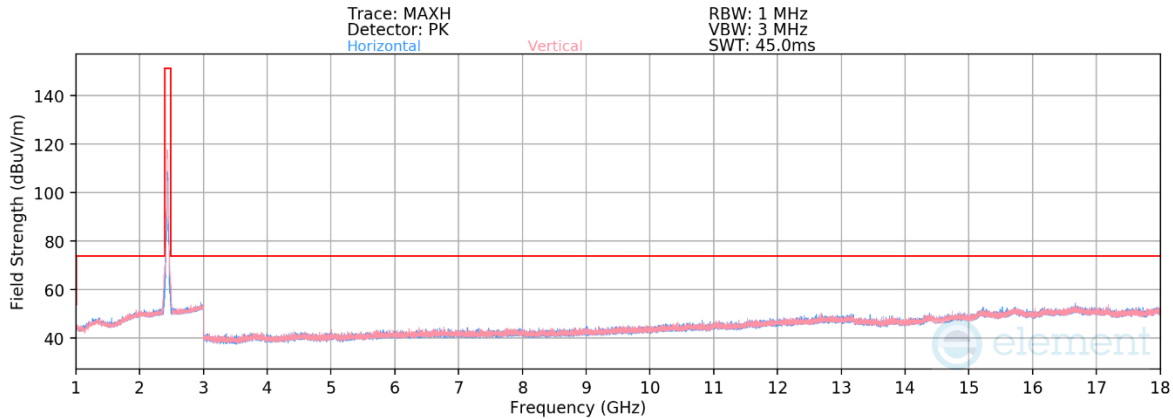

Plot 7-140. Radiated Spurious Emissions above 1 GHz CDD (802.11be (SU) – Ch. 6)

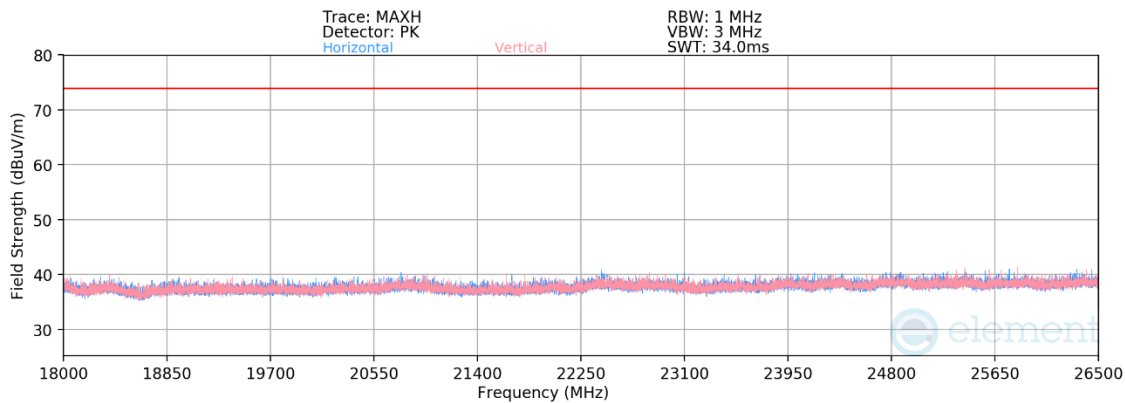

Plot 7-141. Radiated Spurious Emissions above 18 GHz CDD (802.11be (SU) – Ch. 6)

Mode: 802.11be (SU)

Data Rate: MCS0

Distance of Measurements: 3 Meters


Operating Frequency: 2437 MHz

Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4874.00	Average	V	-	-	-78.29	2.51	0.00	31.21	53.98	-22.77
4874.00	Peak	V	-	-	-66.76	2.51	0.00	42.75	73.98	-31.23
7311.00	Average	V	167	143	-72.21	5.39	0.00	40.18	53.98	-13.80
7311.00	Peak	V	167	143	-60.74	5.39	0.00	51.66	73.98	-22.32
12185.00	Average	H	-	-	-81.80	11.57	0.00	36.77	53.98	-17.21
12185.00	Peak	H	-	-	-70.46	11.57	0.00	48.11	73.98	-25.87
19496.00	Average	V	-	-	-63.05	-6.00	-9.54	28.41	53.98	-25.57
19496.00	Peak	V	-	-	-51.88	-6.00	-9.54	39.58	73.98	-34.40

Table 7-29. Radiated Measurements CDD

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

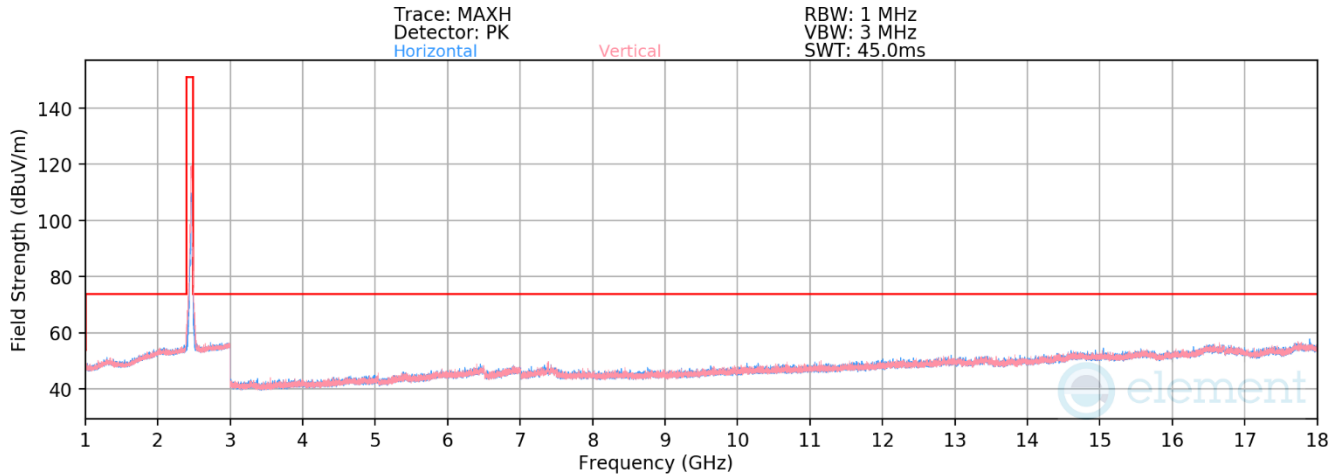

Plot 7-142. Radiated Spurious Emissions above 1 GHz CDD (802.11be (SU) – Ch. 11)

Mode: 802.11be (SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 2462 MHz
Channel: 11


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4924.00	Average	H	-	-	-77.72	3.88	33.15	53.98	-20.83
4924.00	Peak	H	-	-	-66.15	3.88	44.72	73.98	-29.26
7386.00	Average	V	147	134	-74.33	7.71	40.39	53.98	-13.59
7386.00	Peak	V	147	134	-62.54	7.71	52.17	73.98	-21.81
12310.00	Average	H	-	-	-79.37	11.94	39.57	53.98	-14.41
12310.00	Peak	H	-	-	-68.70	11.94	50.23	73.98	-23.75

Table 7-30. Radiated Measurements CDD

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 117 of 177


7.8.2 Antenna WF8 Radiated Restricted Band Edge Measurements

Mode	802.11b
Data Rate	11 Mbps
Distance of Measurement	3 Meters
Operating Frequency	2412 MHz
Channel	1

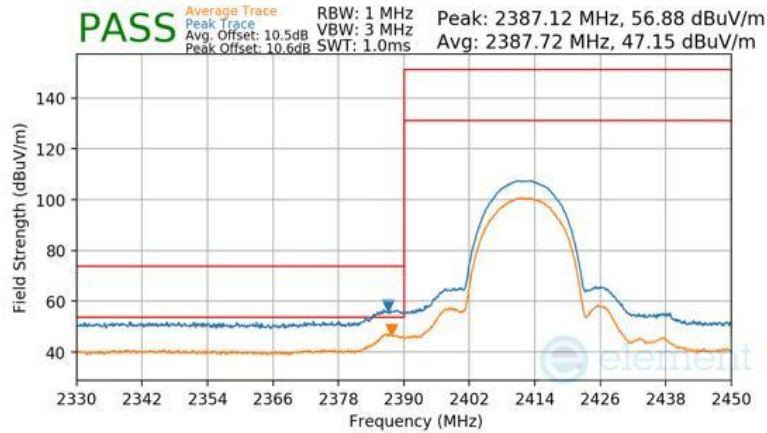

Plot 7-143 Radiated Restricted Lower Band Edge Measurement Antenna WF8

Mode	802.11b
Data Rate	11 Mbps
Distance of Measurement	3 Meters
Operating Frequency	2462 MHz
Channel	11

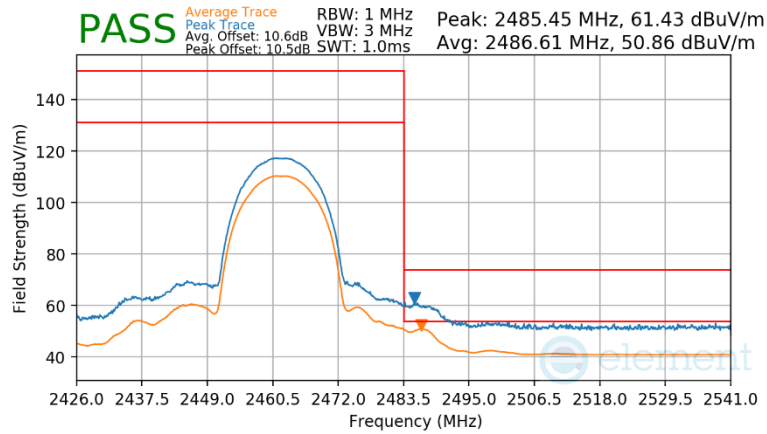


Plot 7-144 Radiated Restricted Upper Band Edge Measurement Antenna WF8

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 118 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11b
 11 Mbps
 3 Meters
 2467 MHz
 12

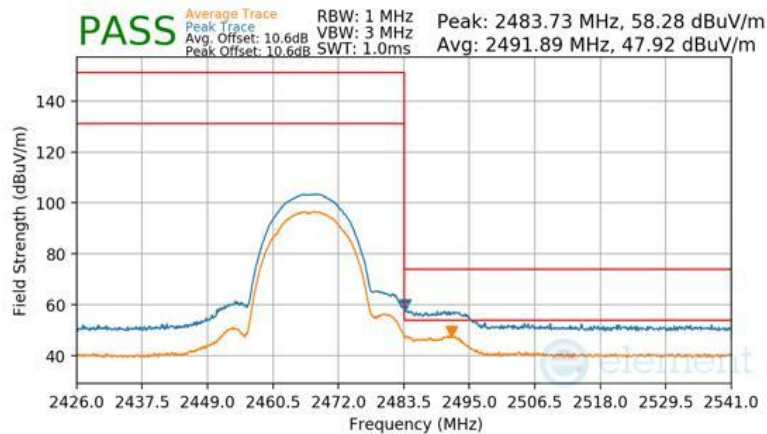

Plot 7-145 Radiated Restricted Upper Band Edge Measurement Antenna WF8

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11b
 11 Mbps
 3 Meters
 2472 MHz
 13

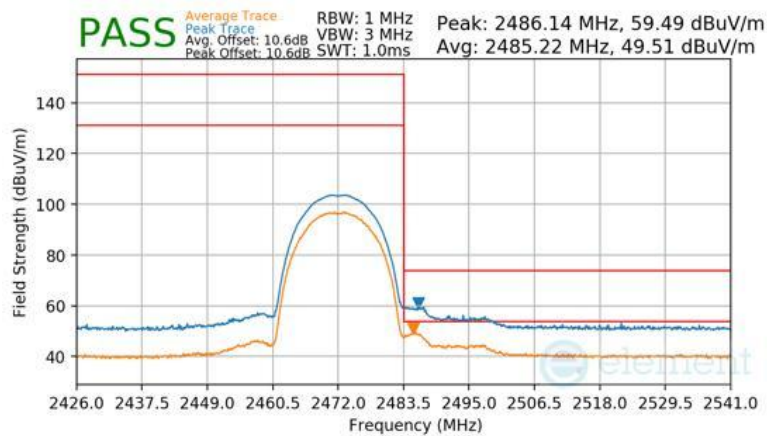


Plot 7-146 Radiated Restricted Upper Band Edge Measurement Antenna WF8

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11n
 MCS7
 3 Meters
 2412 MHz
 1

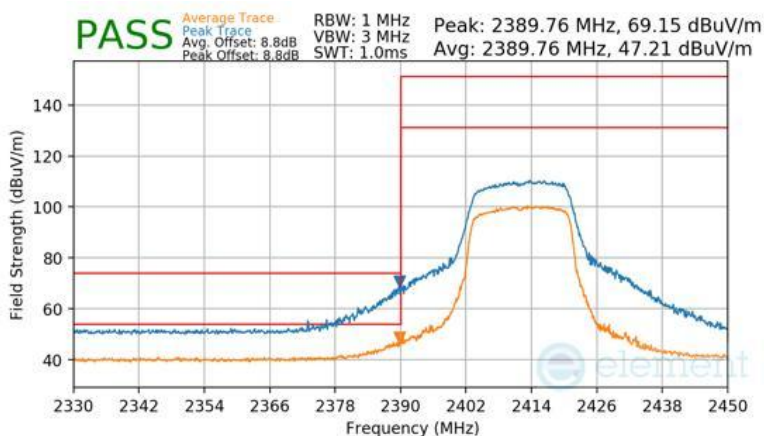

Plot 7-147 Radiated Restricted Lower Band Edge Measurement Antenna WF8

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11n
 MCS7
 3 Meters
 2417 MHz
 2

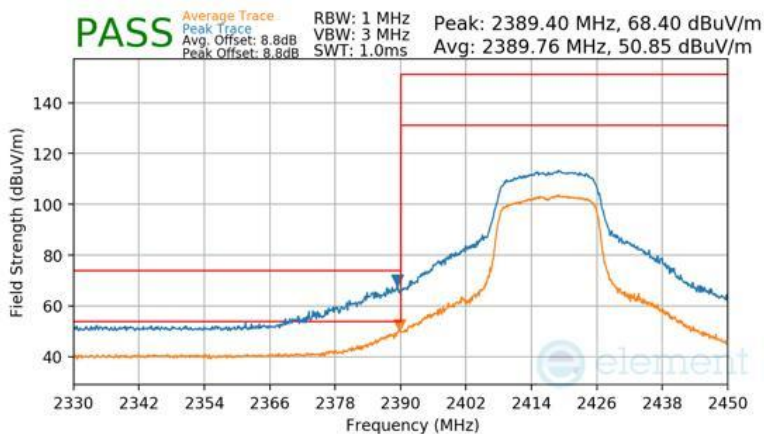


Plot 7-148 Radiated Restricted Lower Band Edge Measurement Antenna WF8

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 120 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11n
MCS7
3 Meters
2422 MHz
3

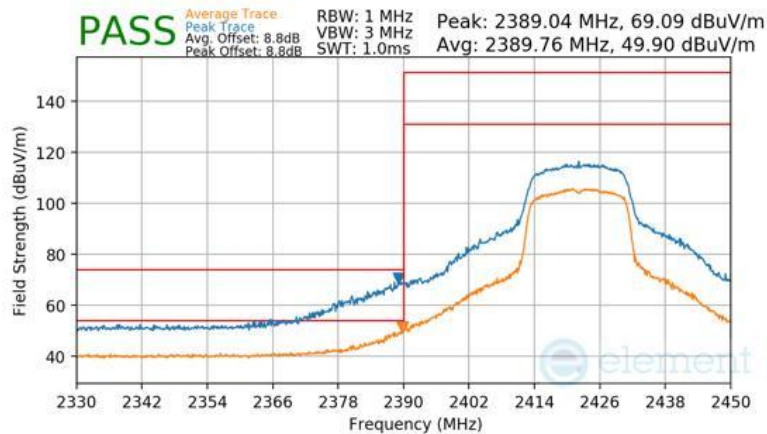

Plot 7-149 Radiated Restricted Lower Band Edge Measurement Antenna WF8

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11n
MCS7
3 Meters
2427 MHz
4

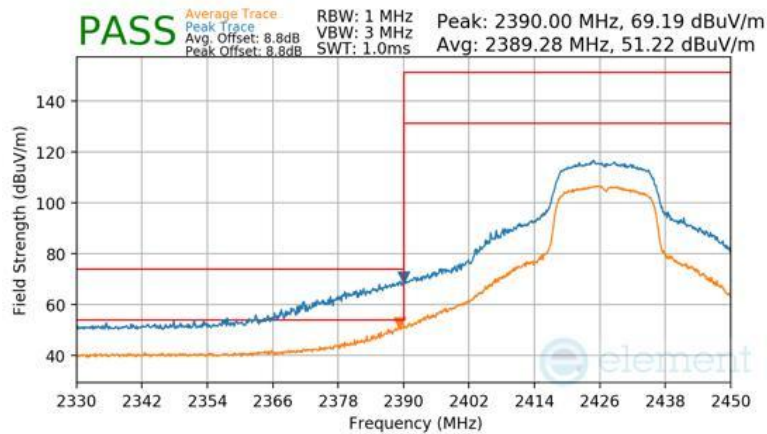


Plot 7-150 Radiated Restricted Lower Band Edge Measurement Antenna WF8

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 121 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11n
 MCS7
 3 Meters
 2432 MHz
 5

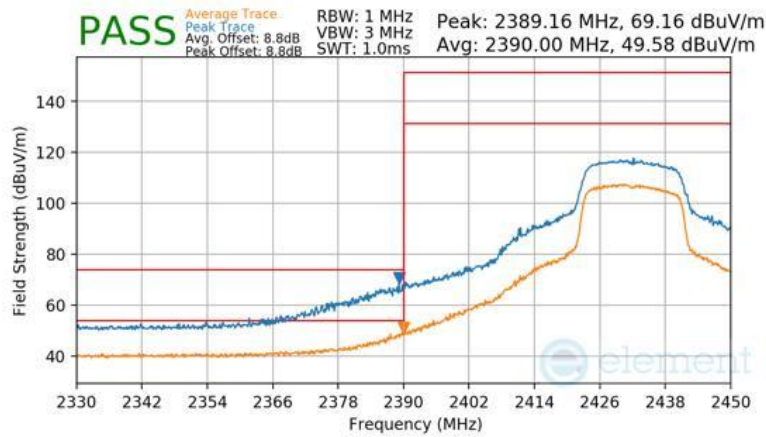

Plot 7-151 Radiated Restricted Lower Band Edge Measurement Antenna WF8

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11n
 MCS7
 3 Meters
 2437 MHz
 6

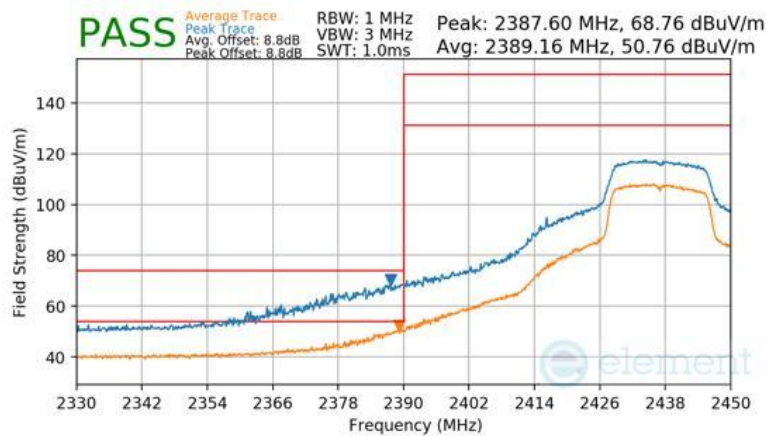


Plot 7-152 Radiated Restricted Lower Band Edge Measurement Antenna WF8

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 122 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11n
 MCS7
 3 Meters
 2437 MHz
 6

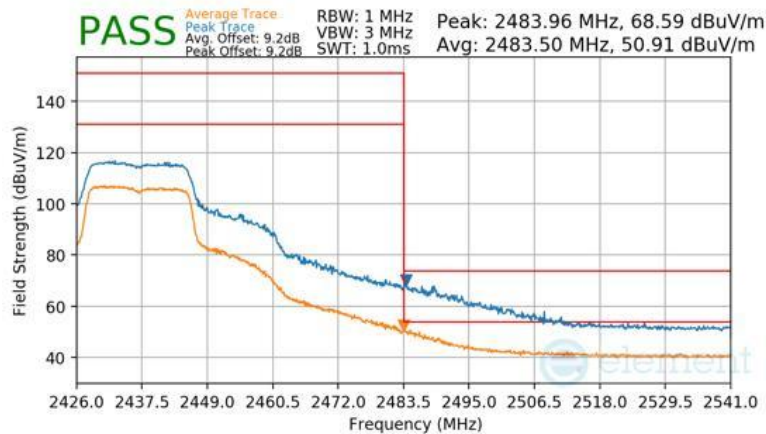

Plot 7-153 Radiated Restricted Upper Band Edge Measurement Antenna WF8

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11n
 MCS7
 3 Meters
 2442 MHz
 7

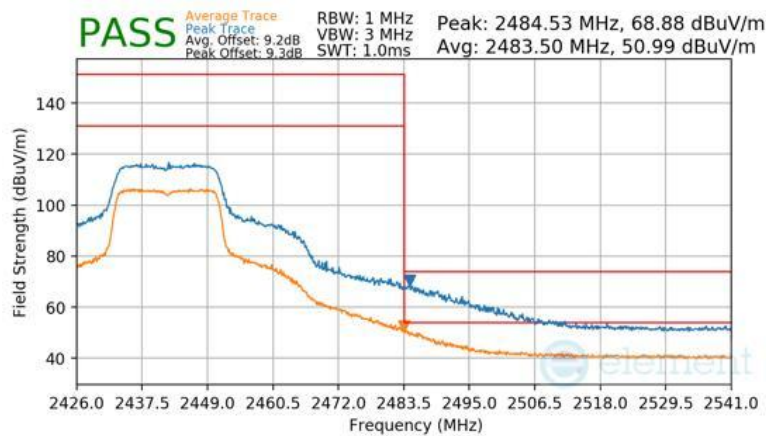


Plot 7-154 Radiated Restricted Upper Band Edge Measurement Antenna WF8

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 123 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11n
 MCS7
 3 Meters
 2447 MHz
 8

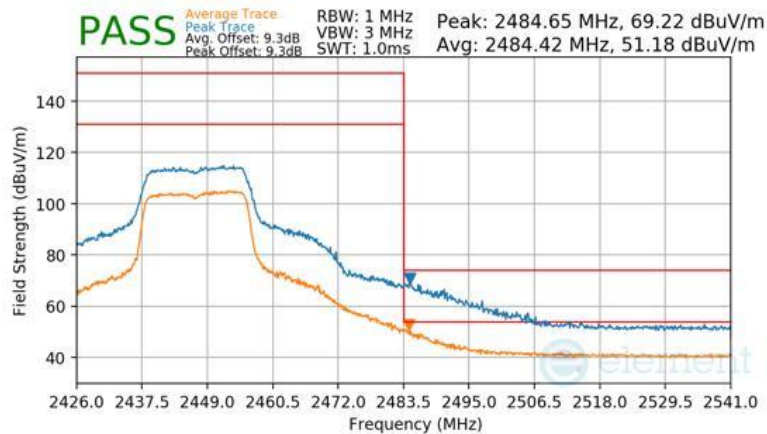

Plot 7-155 Radiated Restricted Upper Band Edge Measurement Antenna WF8

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11n
 MCS7
 3 Meters
 2452 MHz
 9

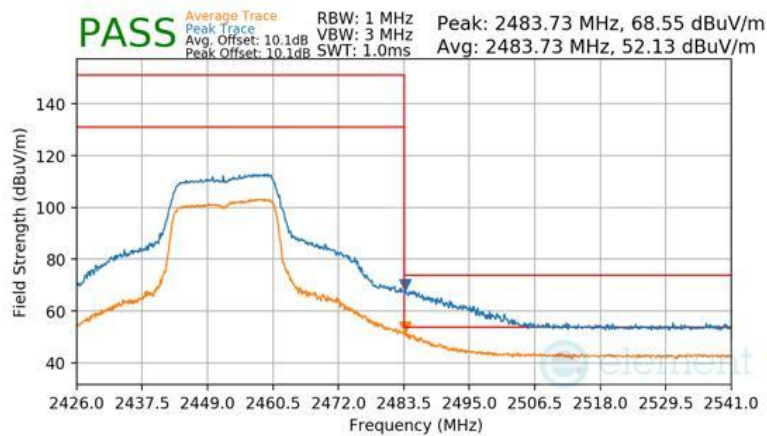


Plot 7-156 Radiated Restricted Upper Band Edge Measurement Antenna WF8

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 124 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11n
 MCS7
 3 Meters
 2457 MHz
 10

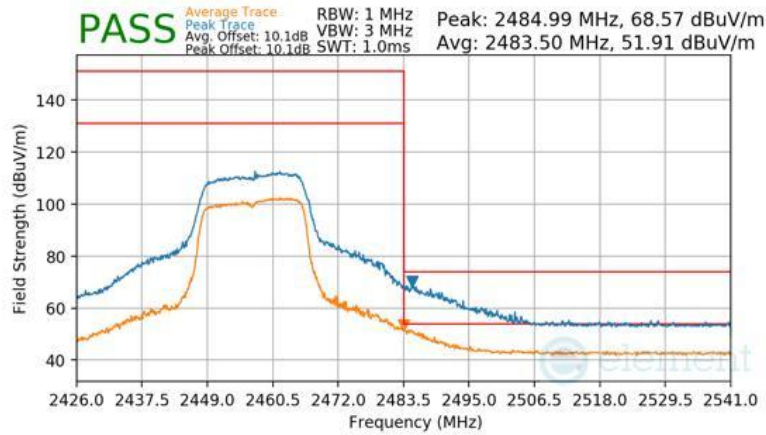

Plot 7-157 Radiated Restricted Upper Band Edge Measurement Antenna WF8

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11n
 MCS7
 3 Meters
 2462 MHz
 11

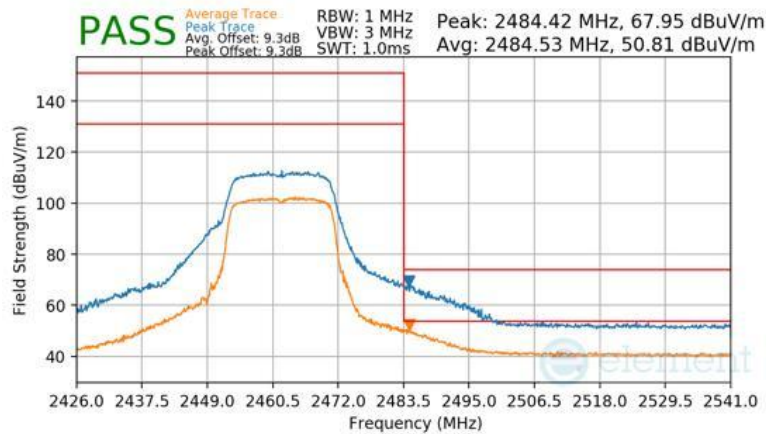


Plot 7-158 Radiated Restricted Upper Band Edge Measurement Antenna WF8

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 125 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11n
 MCS7
 3 Meters
 2467 MHz
 12

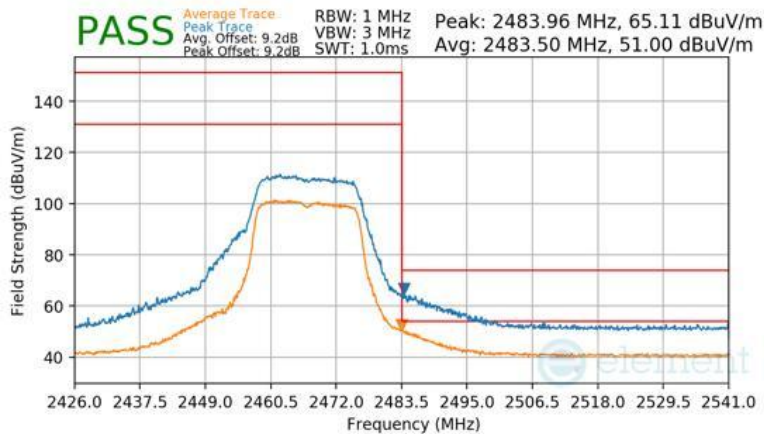

Plot 7-159 Radiated Restricted Upper Band Edge Measurement Antenna WF8

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11n
 MCS7
 3 Meters
 2472 MHz
 13

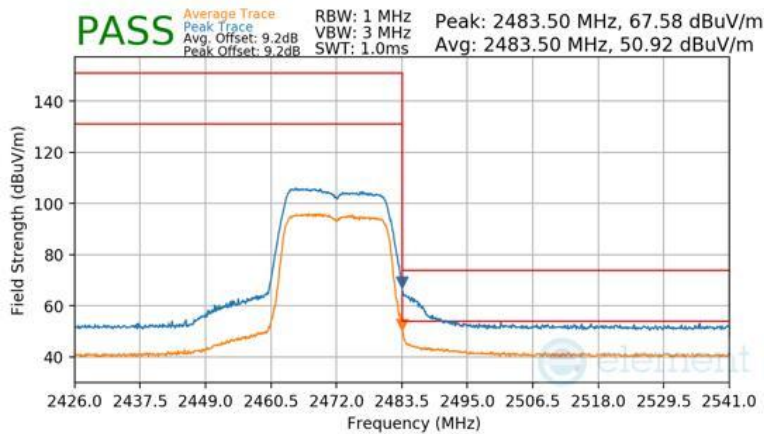


Plot 7-160 Radiated Restricted Upper Band Edge Measurement Antenna WF8

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 126 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS9
 3 Meters
 2412 MHz
 1

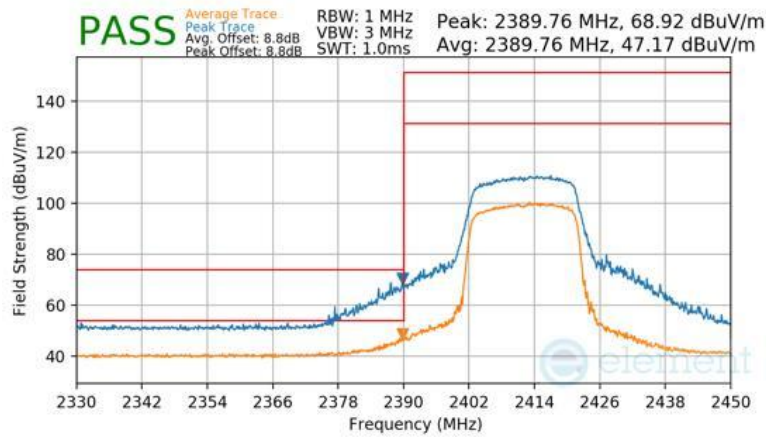

Plot 7-161 Radiated Restricted Lower Band Edge Measurement Antenna WF8

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS9
 3 Meters
 2417 MHz
 2

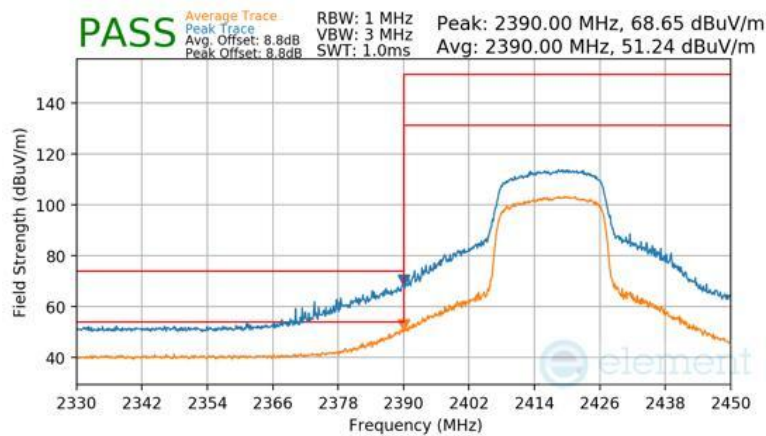


Plot 7-162 Radiated Restricted Lower Band Edge Measurement Antenna WF8

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 127 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS9
 3 Meters
 2422 MHz
 3

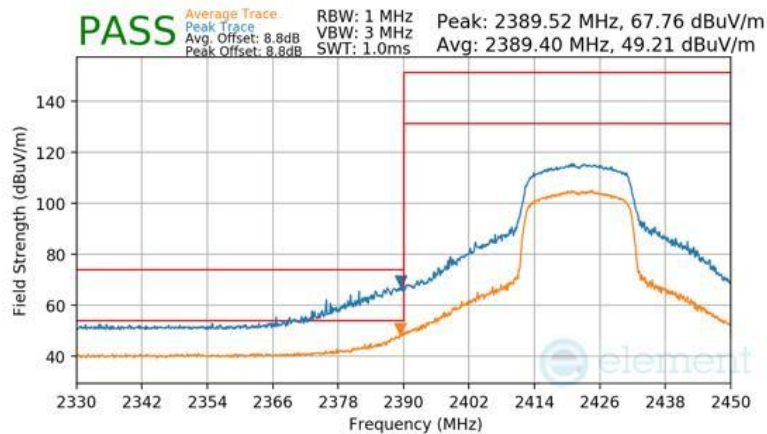

Plot 7-163 Radiated Restricted Lower Band Edge Measurement Antenna WF8

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS9
 3 Meters
 2427 MHz
 4

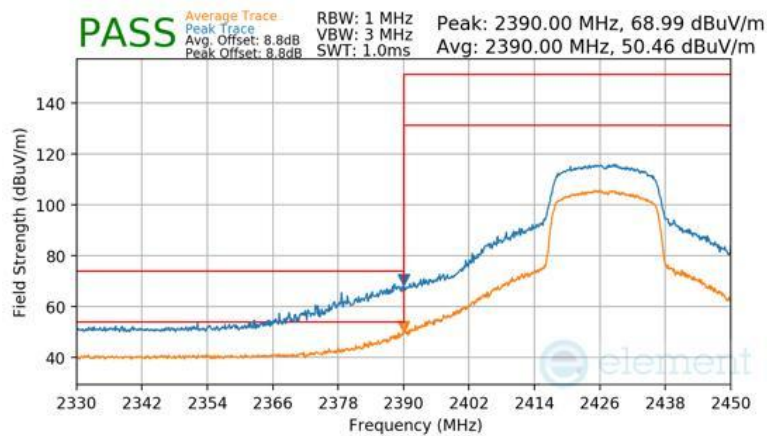


Plot 7-164 Radiated Restricted Lower Band Edge Measurement Antenna WF8

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 128 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS9
 3 Meters
 2432 MHz
 5

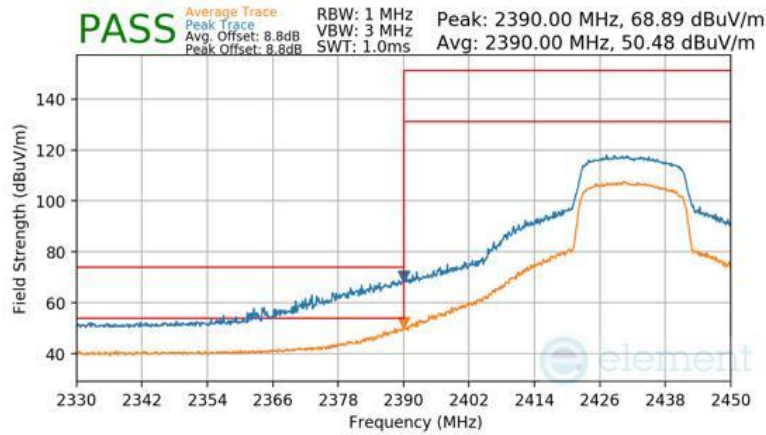

Plot 7-165 Radiated Restricted Lower Band Edge Measurement Antenna WF8

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS9
 3 Meters
 2437 MHz
 6

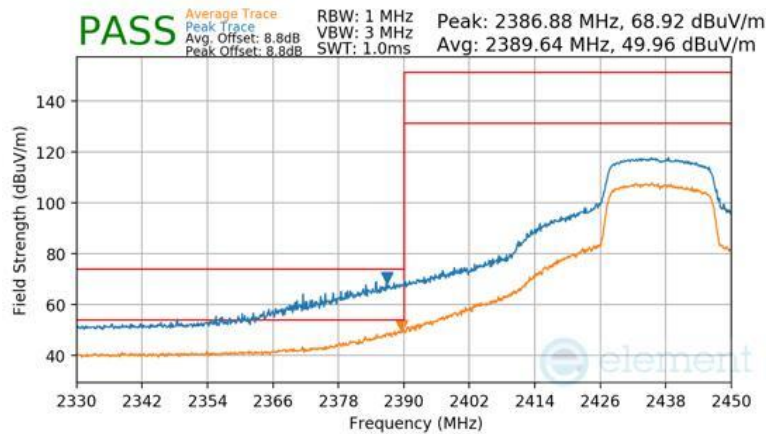


Plot 7-166 Radiated Restricted Lower Band Edge Measurement Antenna WF8

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 129 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS9
 3 Meters
 2437 MHz
 6

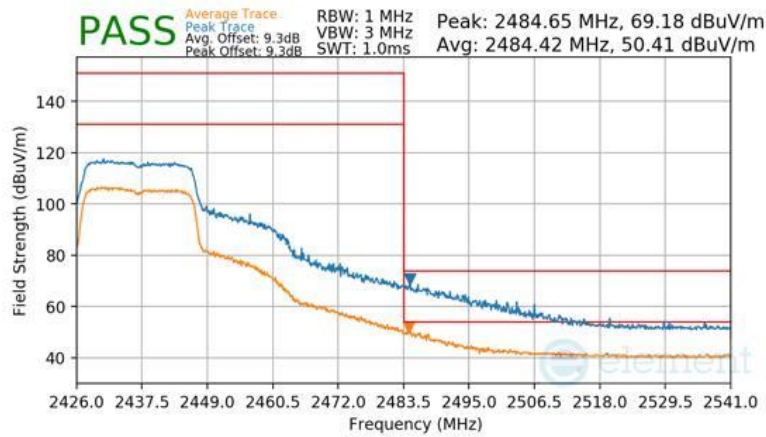

Plot 7-167 Radiated Restricted Upper Band Edge Measurement Antenna WF8

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS9
 3 Meters
 2442 MHz
 7

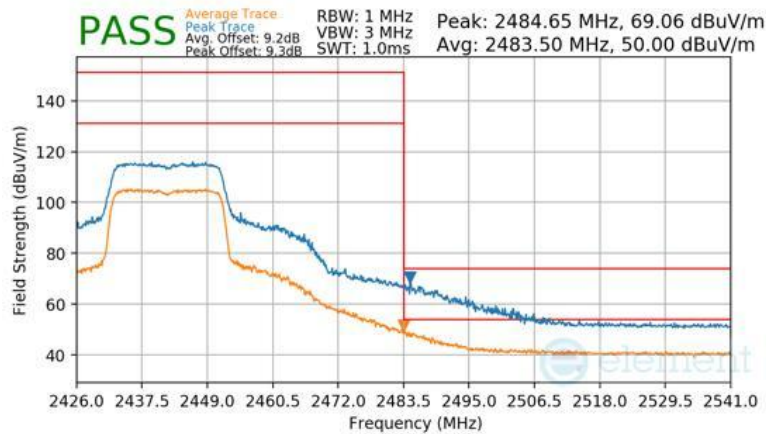


Plot 7-168 Radiated Restricted Upper Band Edge Measurement Antenna WF8

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 130 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
MCS9
3 Meters
2447 MHz
8

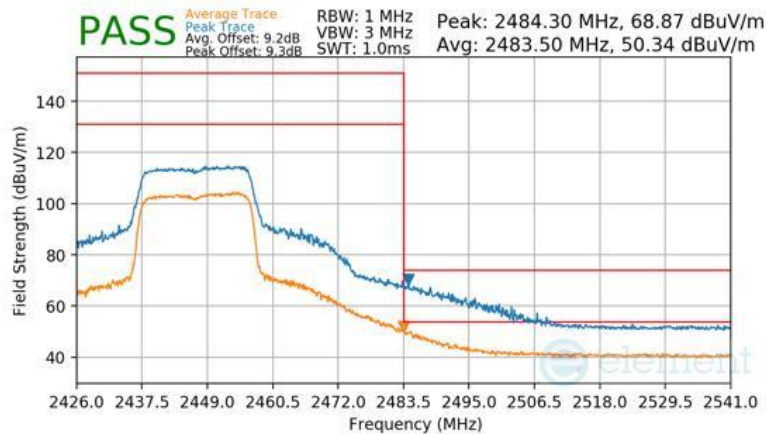

Plot 7-169 Radiated Restricted Upper Band Edge Measurement Antenna WF8

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
MCS9
3 Meters
2452 MHz
9

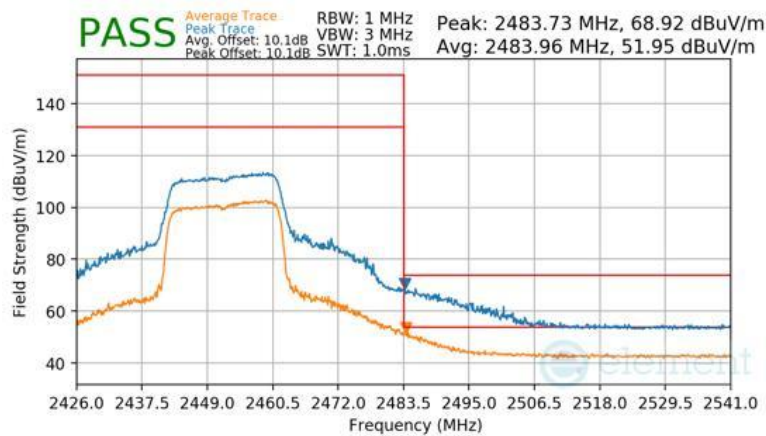


Plot 7-170 Radiated Restricted Upper Band Edge Measurement Antenna WF8

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 131 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS9
 3 Meters
 2457 MHz
 10

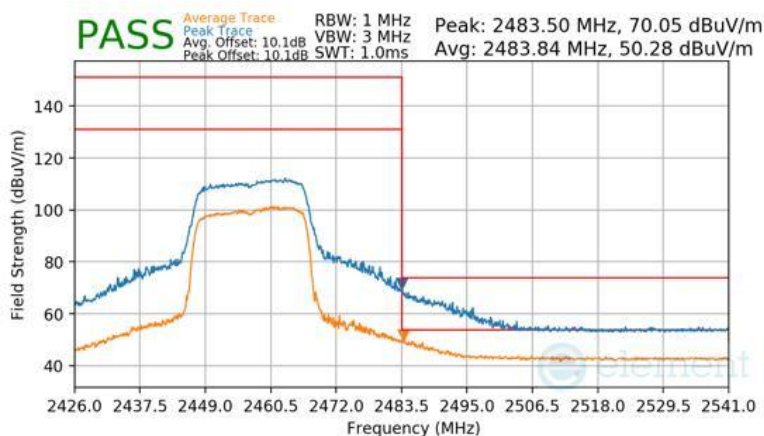

Plot 7-171 Radiated Restricted Upper Band Edge Measurement Antenna WF8

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS9
 3 Meters
 2462 MHz
 11

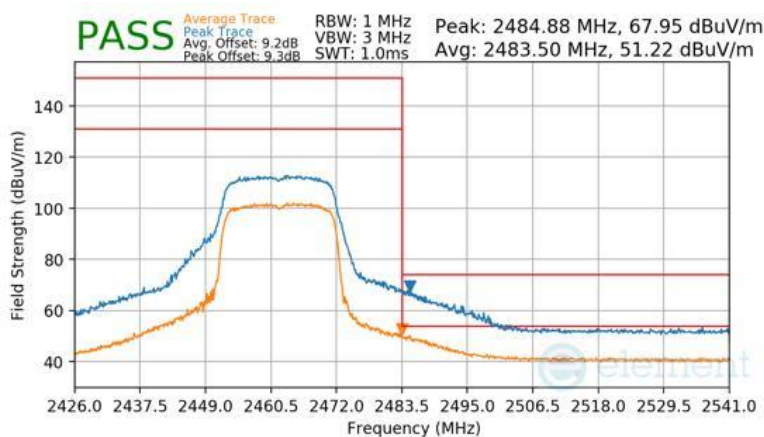


Plot 7-172 Radiated Restricted Upper Band Edge Measurement Antenna WF8

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS9
 3 Meters
 2467 MHz
 12

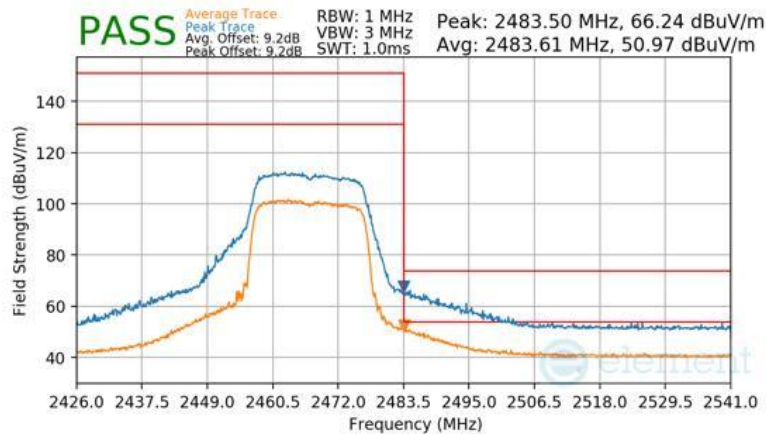

Plot 7-173 Radiated Restricted Upper Band Edge Measurement Antenna WF8

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS9
 3 Meters
 2472 MHz
 13

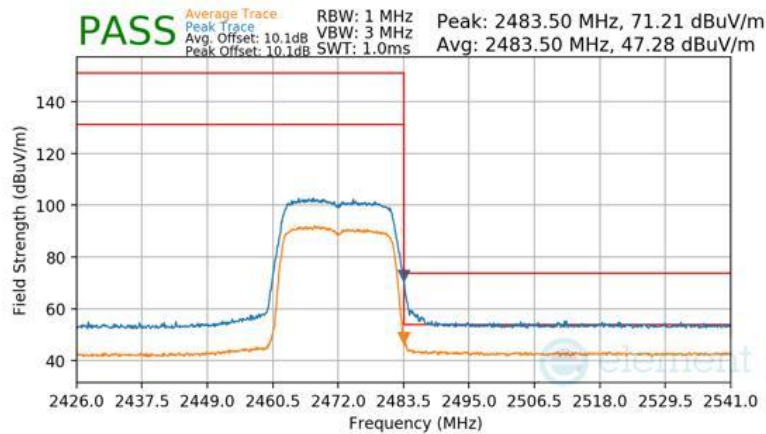

Plot 7-174 Radiated Restricted Upper Band Edge Measurement Antenna WF8


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 133 of 177

Mode	802.11b
Data Rate	11 Mbps
Distance of Measurement	3 Meters
Operating Frequency	2412 MHz
Channel	1

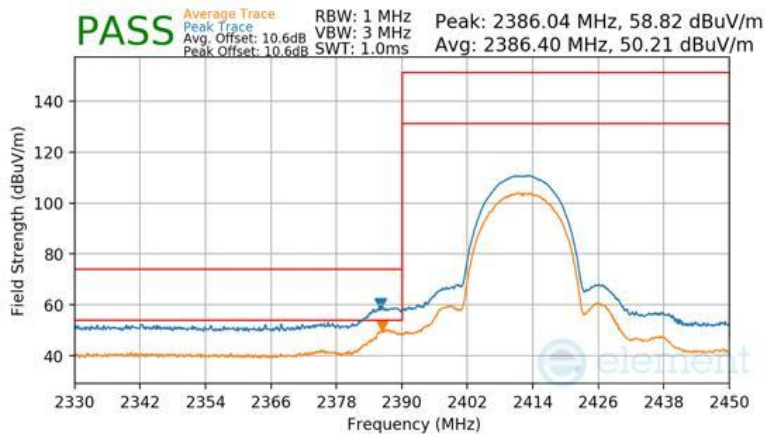

Plot 7-175 Radiated Restricted Lower Band Edge Measurement Antenna WF7

Mode	802.11b
Data Rate	11 Mbps
Distance of Measurement	3 Meters
Operating Frequency	2462 MHz
Channel	11

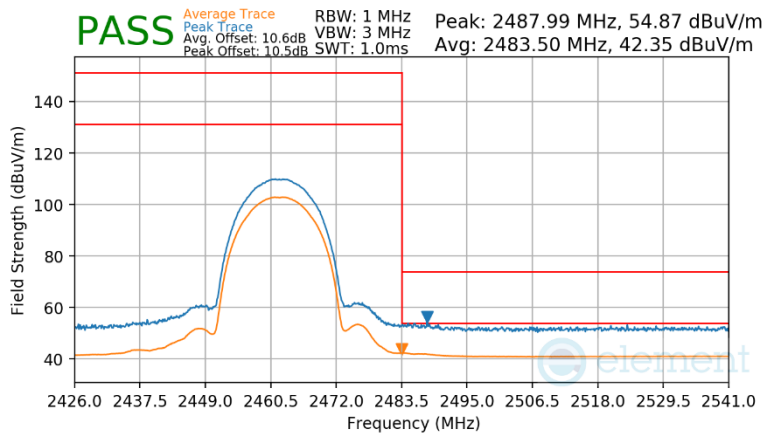


Plot 7-176 Radiated Restricted Upper Band Edge Measurement Antenna WF7

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11b
11 Mbps
3 Meters
2467 MHz
12

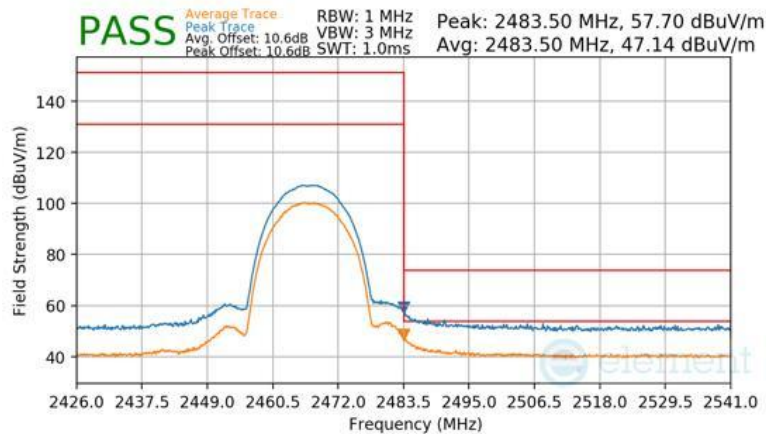

Plot 7-177 Radiated Restricted Upper Band Edge Measurement Antenna WF7

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11b
11 Mbps
3 Meters
2472 MHz
13

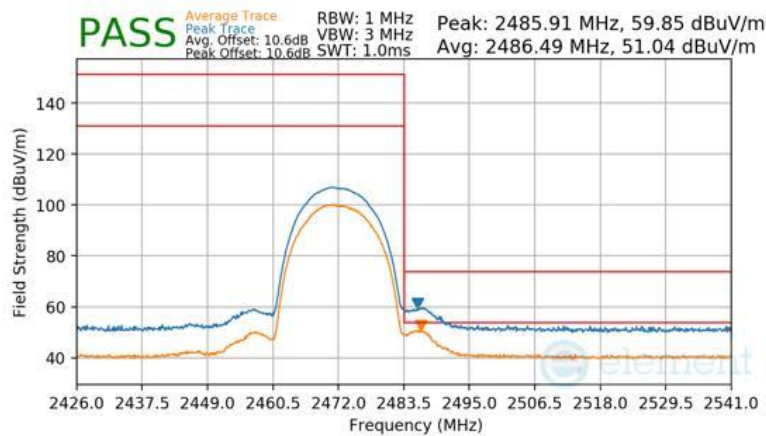


Plot 7-178 Radiated Restricted Upper Band Edge Measurement Antenna WF7

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 135 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11n
MCS7
3 Meters
2412 MHz
1

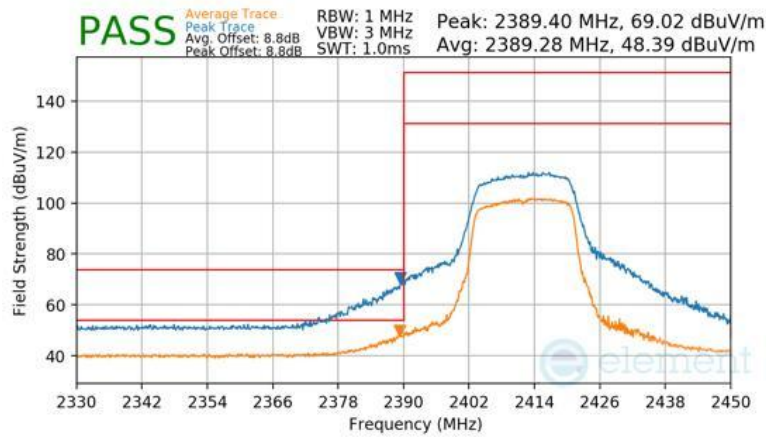

Plot 7-179 Radiated Restricted Lower Band Edge Measurement Antenna WF7

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11n
MCS7
3 Meters
2417 MHz
2

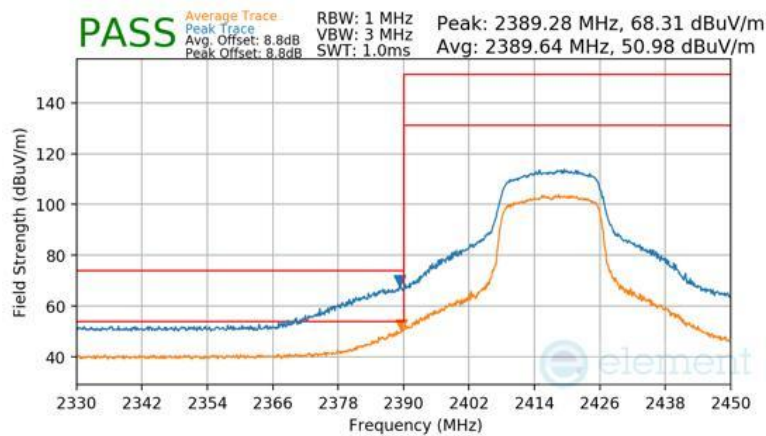


Plot 7-180 Radiated Restricted Lower Band Edge Measurement Antenna WF7

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 136 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11n
MCS7
3 Meters
2422 MHz
3

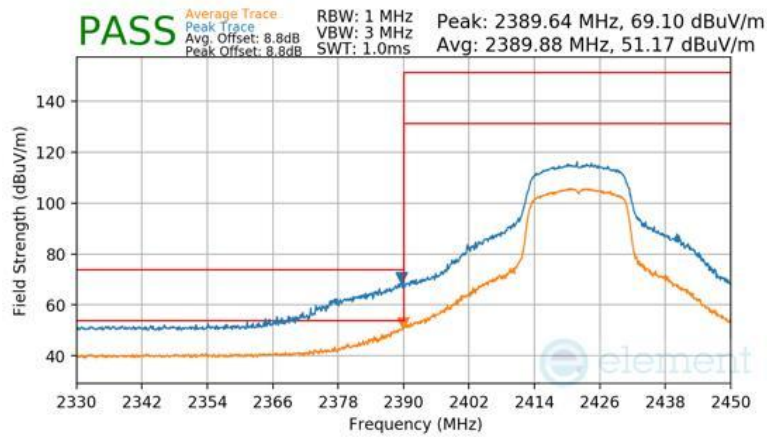

Plot 7-181 Radiated Restricted Lower Band Edge Measurement Antenna WF7

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11n
MCS7
3 Meters
2427 MHz
4

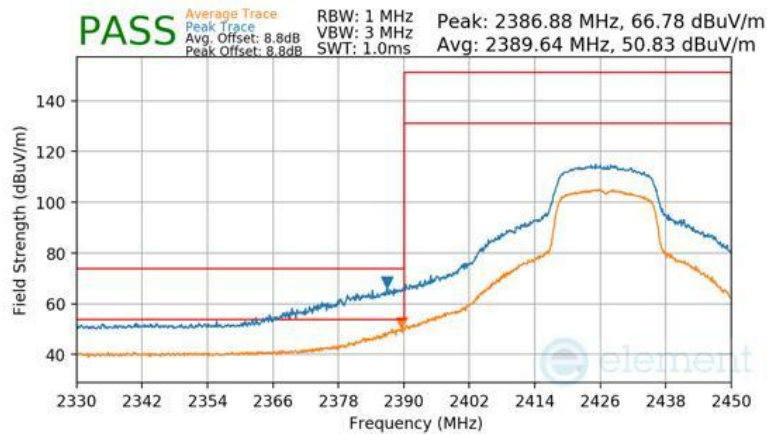


Plot 7-182 Radiated Restricted Lower Band Edge Measurement Antenna WF7

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 137 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11n
 MCS7
 3 Meters
 2432 MHz
 5

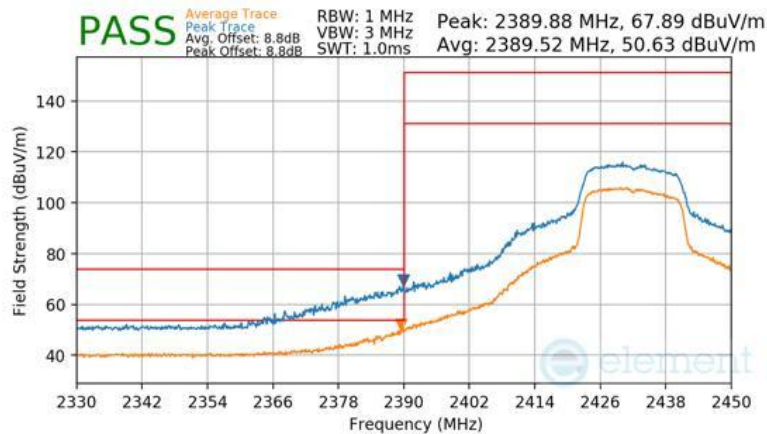

Plot 7-183 Radiated Restricted Lower Band Edge Measurement Antenna WF7

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11n
 MCS7
 3 Meters
 2437 MHz
 6

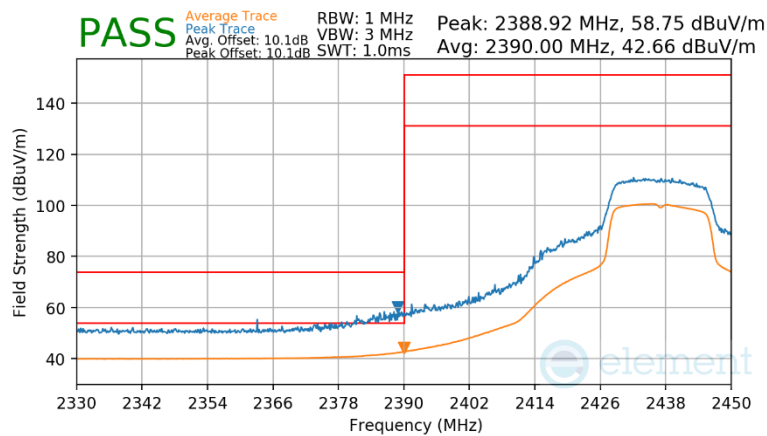


Plot 7-184 Radiated Restricted Lower Band Edge Measurement Antenna WF7

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 138 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11n
 MCS7
 3 Meters
 2437 MHz
 6

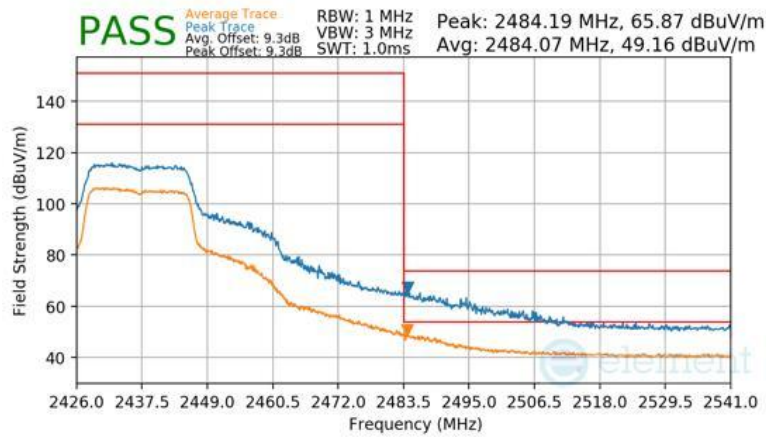

Plot 7-185 Radiated Restricted Upper Band Edge Measurement Antenna WF7

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11n
 MCS7
 3 Meters
 2442 MHz
 7

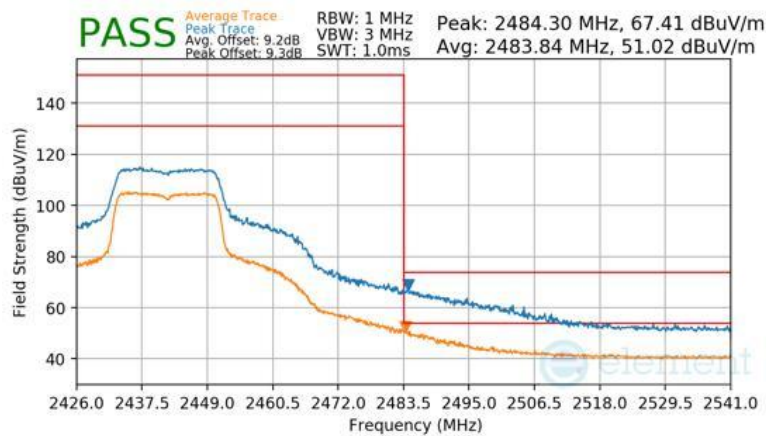


Plot 7-186 Radiated Restricted Upper Band Edge Measurement Antenna WF7

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 139 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11n
 MCS7
 3 Meters
 2447 MHz
 8

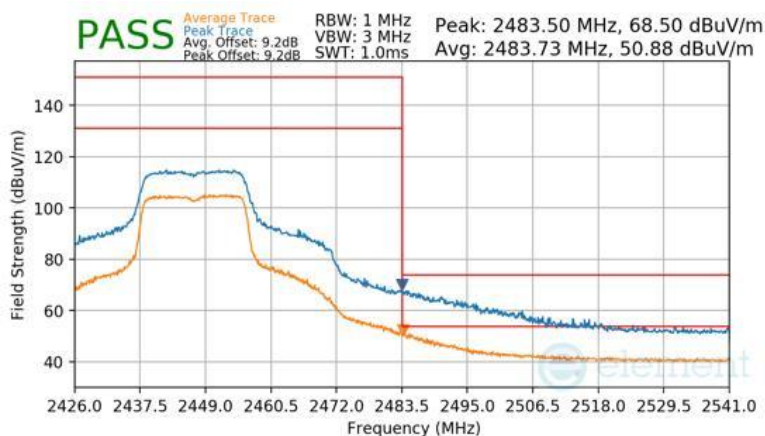

Plot 7-187 Radiated Restricted Upper Band Edge Measurement Antenna WF7

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11n
 MCS7
 3 Meters
 2452 MHz
 9

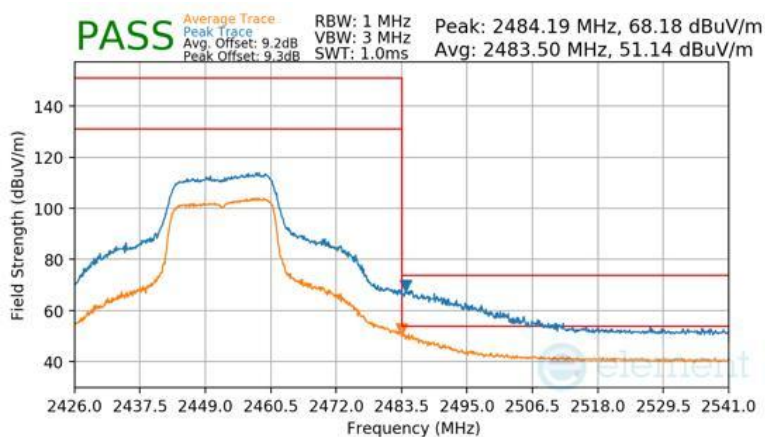


Plot 7-188 Radiated Restricted Upper Band Edge Measurement Antenna WF7

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 140 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11n
 MCS7
 3 Meters
 2457 MHz
 10

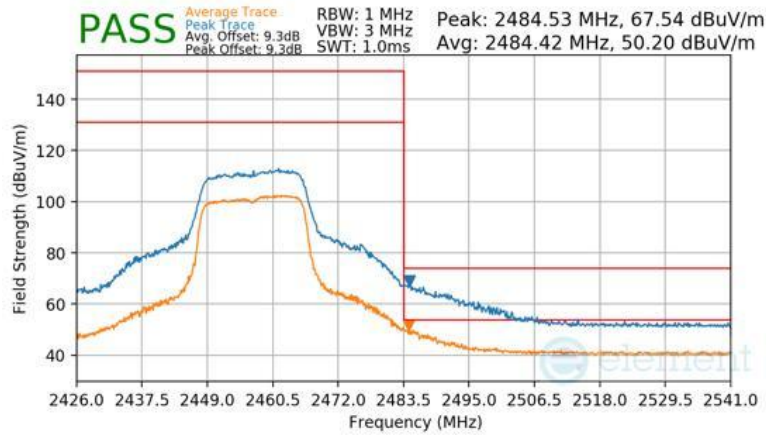

Plot 7-189 Radiated Restricted Upper Band Edge Measurement Antenna WF7

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11n
 MCS7
 3 Meters
 2462 MHz
 11

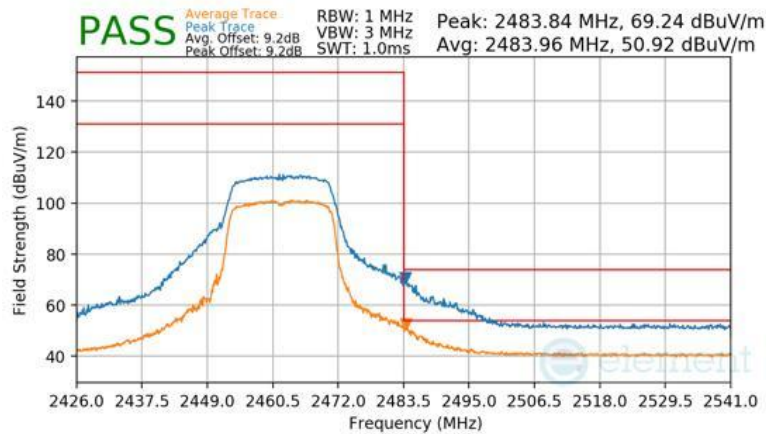


Plot 7-190 Radiated Restricted Upper Band Edge Measurement Antenna WF7

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 141 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11n
 MCS7
 3 Meters
 2467 MHz
 12

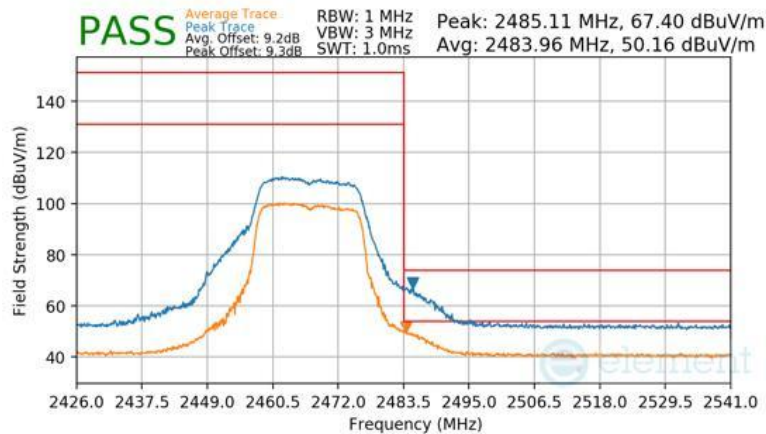

Plot 7-191 Radiated Restricted Upper Band Edge Measurement Antenna WF7

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11n
 MCS7
 3 Meters
 2472 MHz
 13

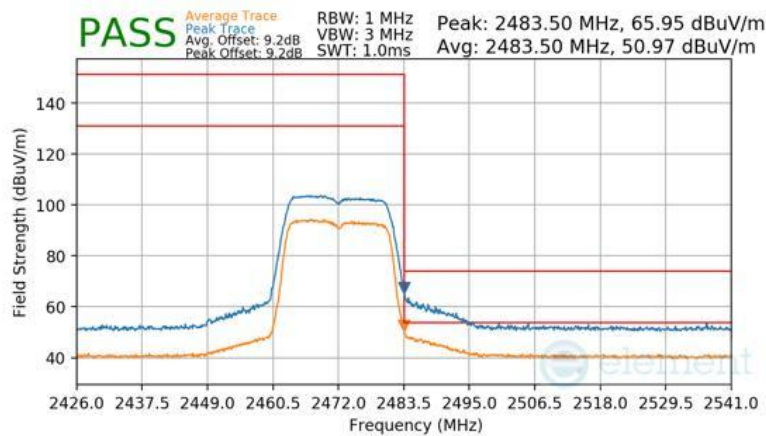


Plot 7-192 Radiated Restricted Upper Band Edge Measurement Antenna WF7

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS9
 3 Meters
 2412 MHz
 1

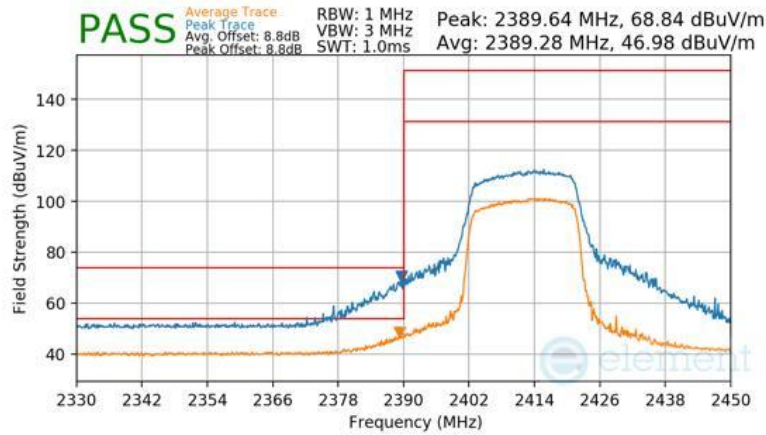

Plot 7-193 Radiated Restricted Lower Band Edge Measurement Antenna WF7

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS9
 3 Meters
 2417 MHz
 2

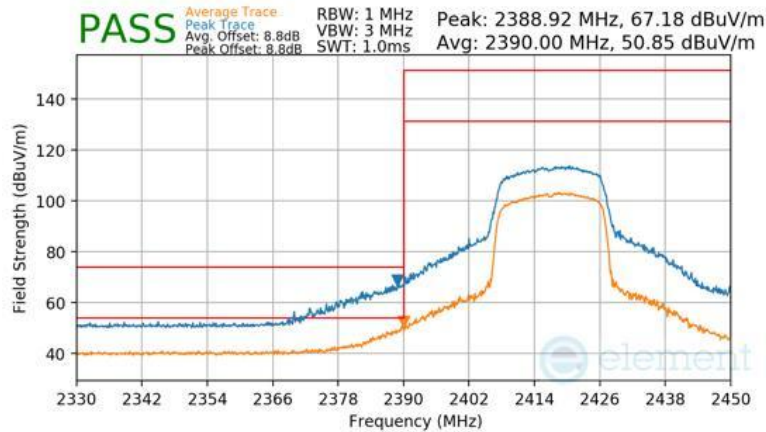


Plot 7-194 Radiated Restricted Lower Band Edge Measurement Antenna WF7

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 143 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS9
 3 Meters
 2422 MHz
 3

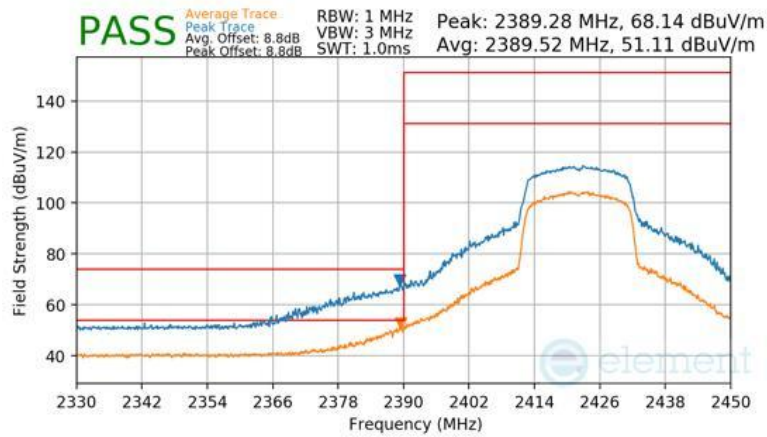

Plot 7-195 Radiated Restricted Lower Band Edge Measurement Antenna WF7

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS9
 3 Meters
 2427 MHz
 4

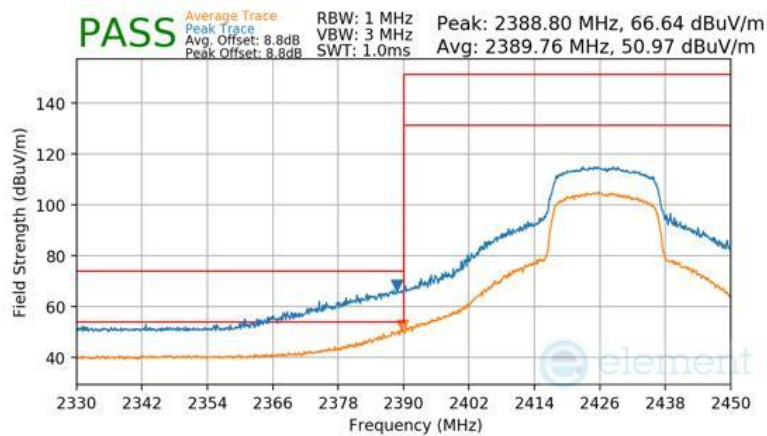


Plot 7-196 Radiated Restricted Lower Band Edge Measurement Antenna WF7

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 144 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS9
 3 Meters
 2432 MHz
 5

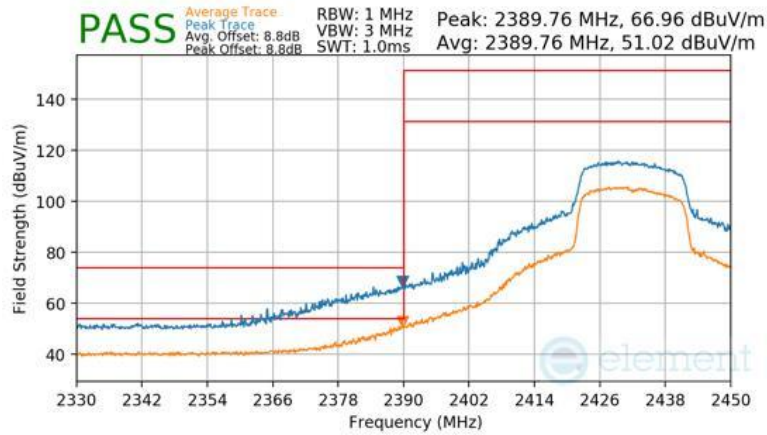

Plot 7-197 Radiated Restricted Lower Band Edge Measurement Antenna WF7

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS9
 3 Meters
 2437 MHz
 6

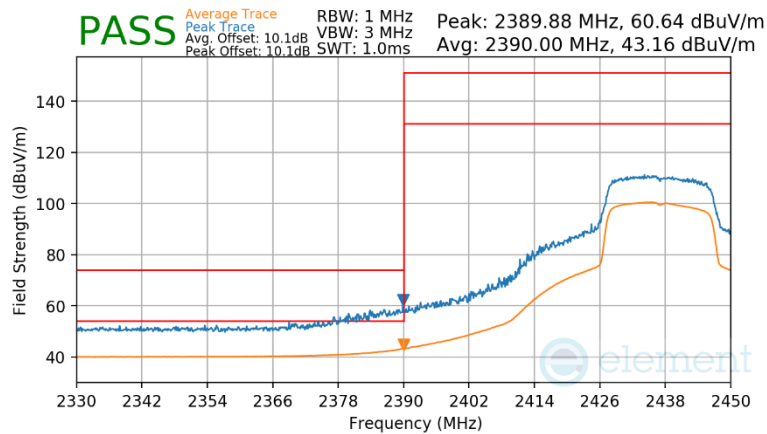


Plot 7-198 Radiated Restricted Lower Band Edge Measurement Antenna WF7

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 145 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
MCS9
3 Meters
2437 MHz
6

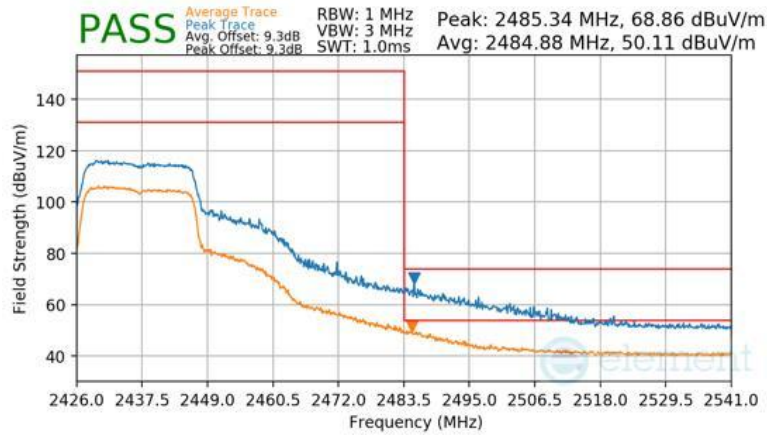

Plot 7-199 Radiated Restricted Upper Band Edge Measurement Antenna WF7

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
MCS9
3 Meters
2442 MHz
7

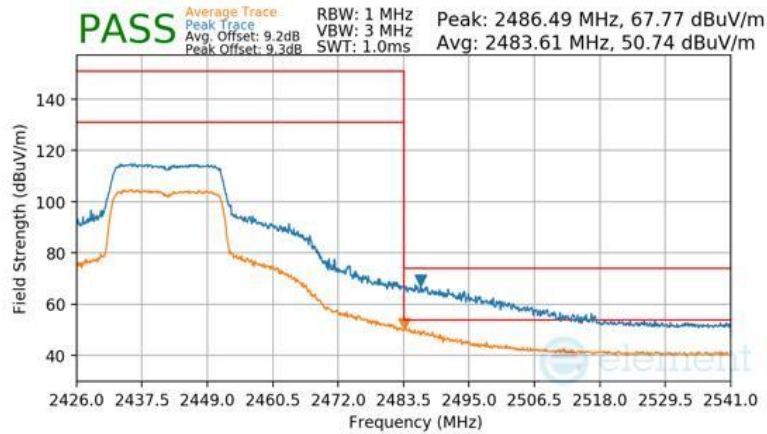


Plot 7-200 Radiated Restricted Upper Band Edge Measurement Antenna WF7

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 146 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS9
 3 Meters
 2447 MHz
 8

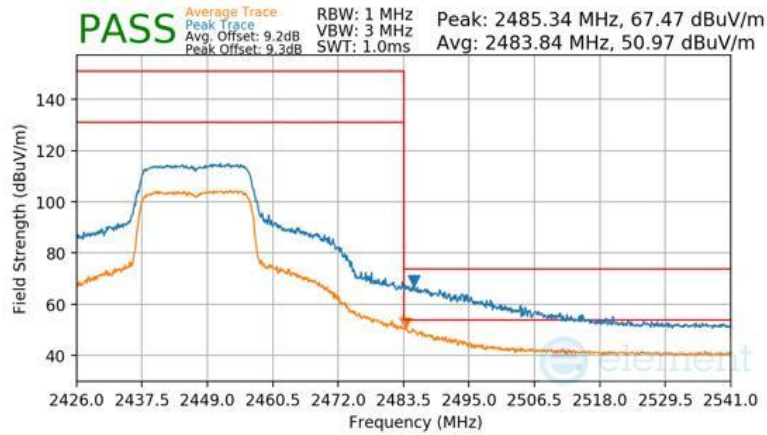

Plot 7-201 Radiated Restricted Upper Band Edge Measurement Antenna WF7

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS9
 3 Meters
 2452 MHz
 9

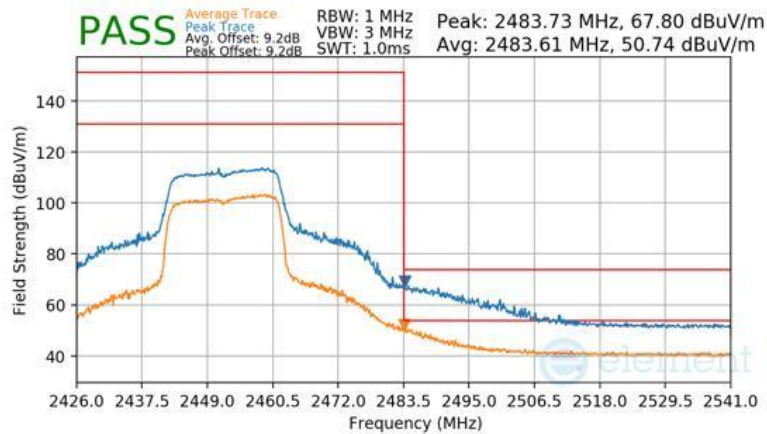


Plot 7-202 Radiated Restricted Upper Band Edge Measurement Antenna WF7

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 147 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS9
 3 Meters
 2457 MHz
 10

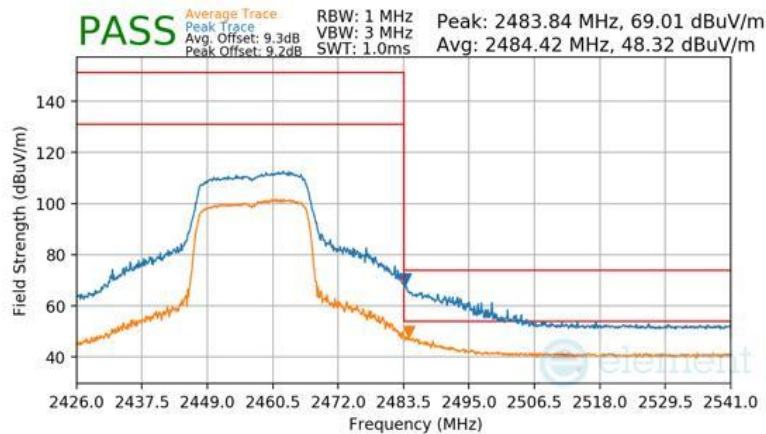

Plot 7-203 Radiated Restricted Upper Band Edge Measurement Antenna WF7

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS9
 3 Meters
 2462 MHz
 11

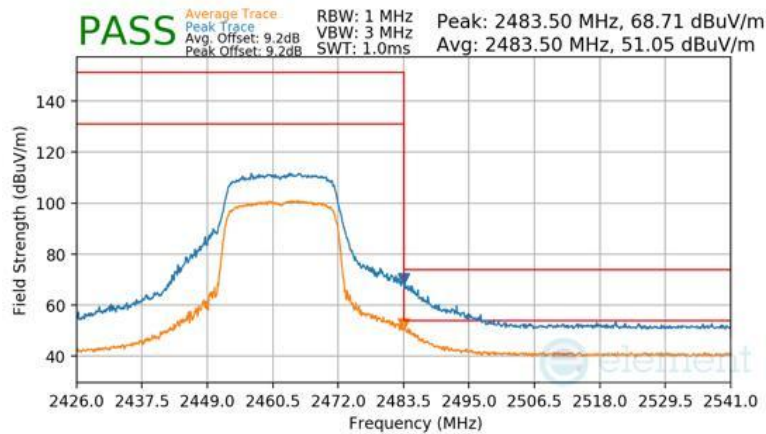


Plot 7-204 Radiated Restricted Upper Band Edge Measurement Antenna WF7

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 148 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS9
 3 Meters
 2467 MHz
 12

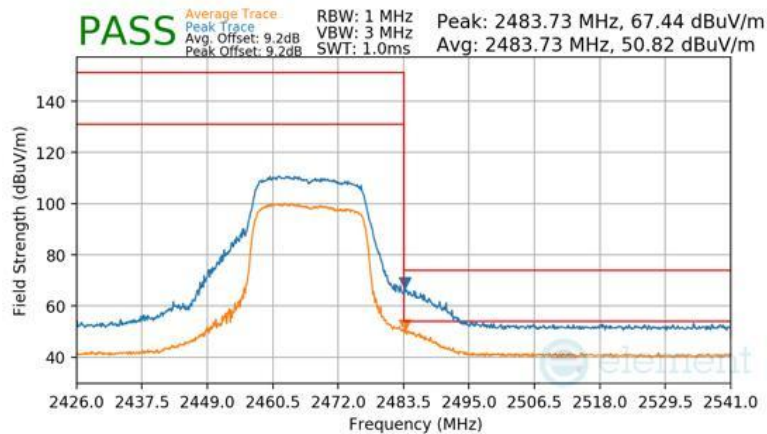

Plot 7-205 Radiated Restricted Upper Band Edge Measurement Antenna WF7

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS9
 3 Meters
 2472 MHz
 13

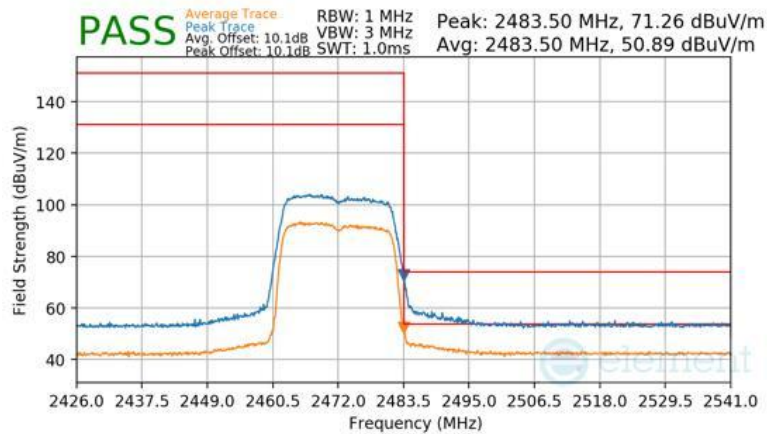


Plot 7-206 Radiated Restricted Upper Band Edge Measurement Antenna WF7

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 149 of 177


7.8.4 CDD Radiated Restricted Band Edge Measurements

Mode	802.11b
Data Rate	11 Mbps
Distance of Measurement	3 Meters
Operating Frequency	2412 MHz
Channel	1

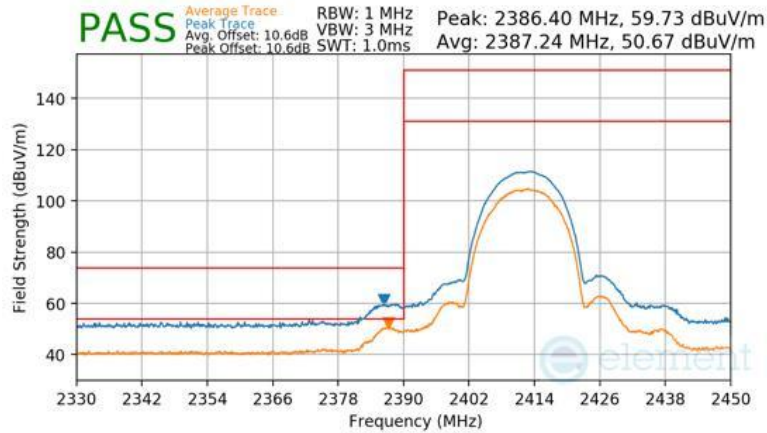

Plot 7-207 Radiated Restricted Lower Band Edge Measurement CDD Primary

Mode	802.11b
Data Rate	11 Mbps
Distance of Measurement	3 Meters
Operating Frequency	2462 MHz
Channel	11

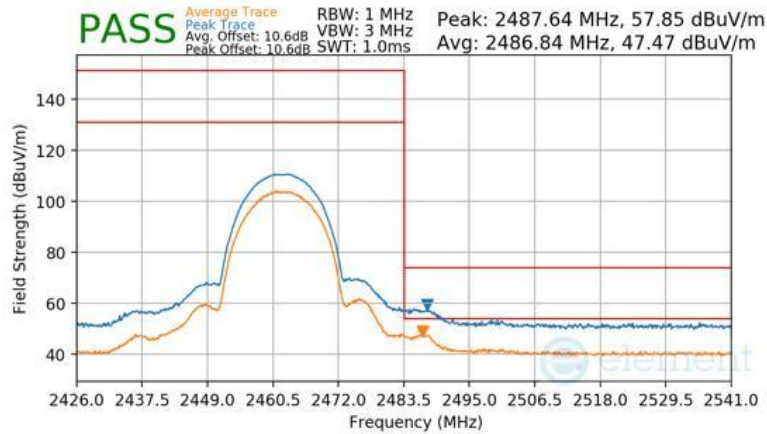


Plot 7-208 Radiated Restricted Upper Band Edge Measurement CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 150 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11b
 11 Mbps
 3 Meters
 2467 MHz
 12

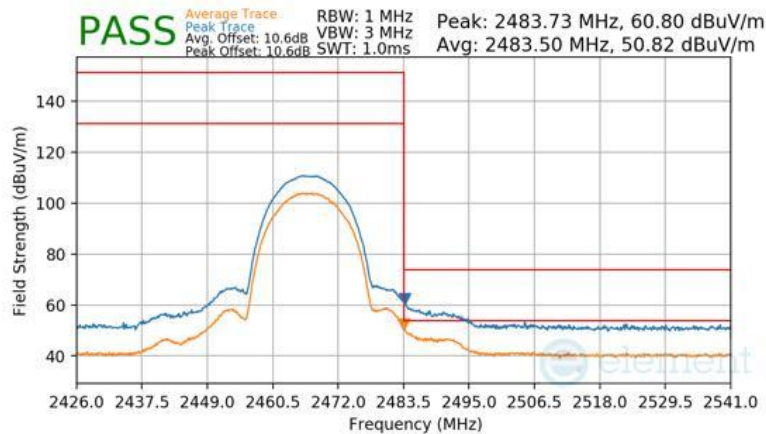

Plot 7-209 Radiated Restricted Upper Band Edge Measurement CDD Primary

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11b
 11 Mbps
 3 Meters
 2472 MHz
 13

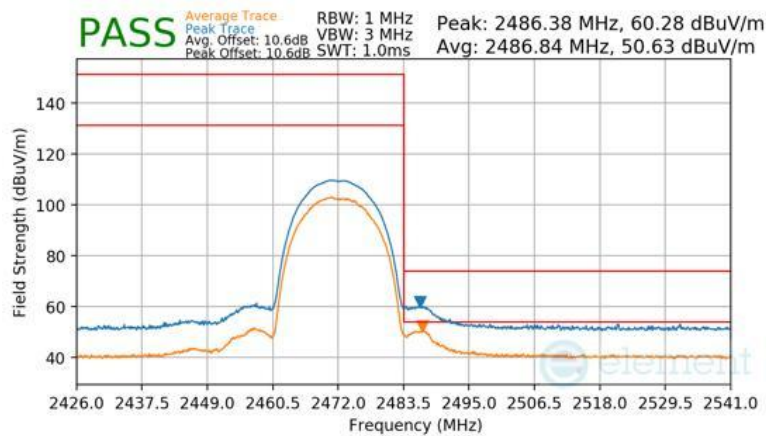


Plot 7-210 Radiated Restricted Upper Band Edge Measurement CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 151 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11n
 MCS7
 3 Meters
 2412 MHz
 1

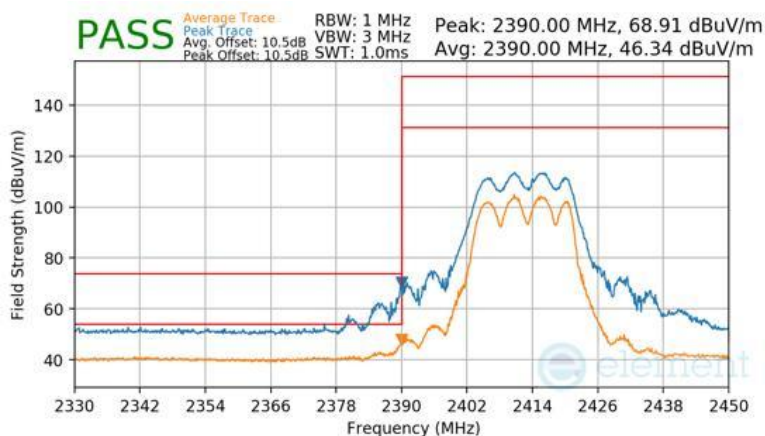

Plot 7-211 Radiated Restricted Lower Band Edge Measurement CDD Primary

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11n
 MCS7
 3 Meters
 2417 MHz
 2

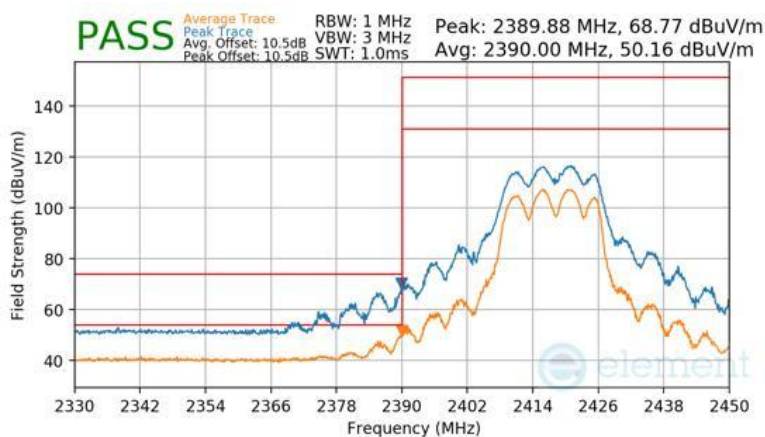


Plot 7-212 Radiated Restricted Lower Band Edge Measurement CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 152 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11n
 MCS7
 3 Meters
 2422 MHz
 3

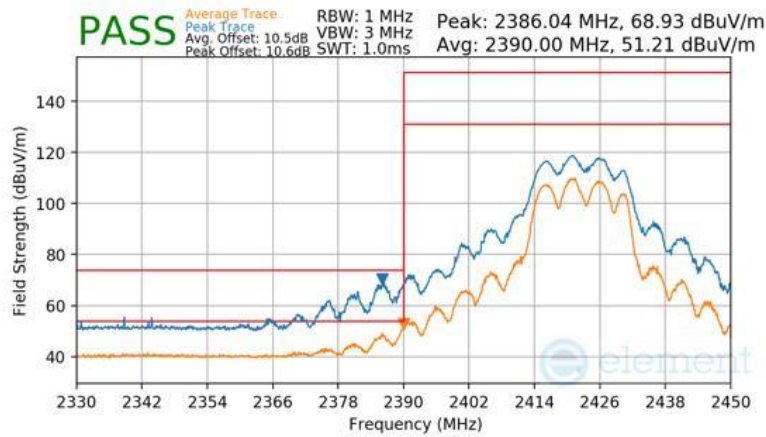

Plot 7-213 Radiated Restricted Lower Band Edge Measurement CDD Primary

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11n
 MCS7
 3 Meters
 2427 MHz
 4

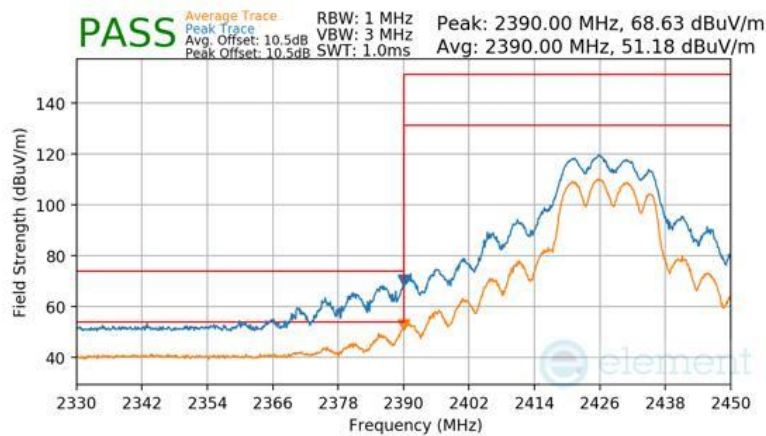


Plot 7-214 Radiated Restricted Lower Band Edge Measurement CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 153 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11n
 MCS7
 3 Meters
 2432 MHz
 5

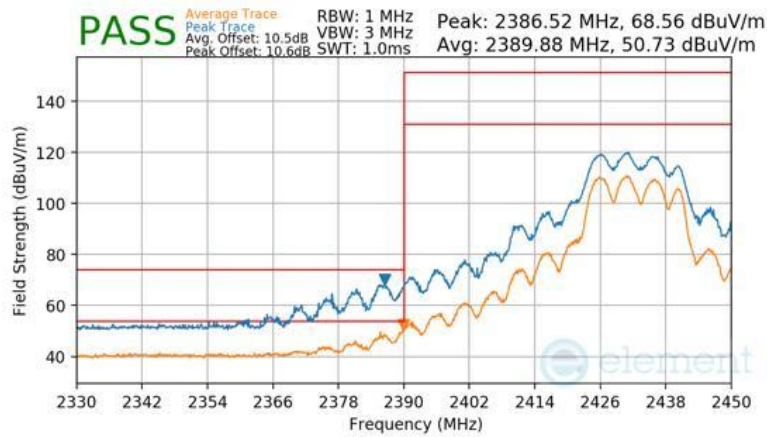

Plot 7-215 Radiated Restricted Lower Band Edge Measurement CDD Primary

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11n
 MCS7
 3 Meters
 2437 MHz
 6

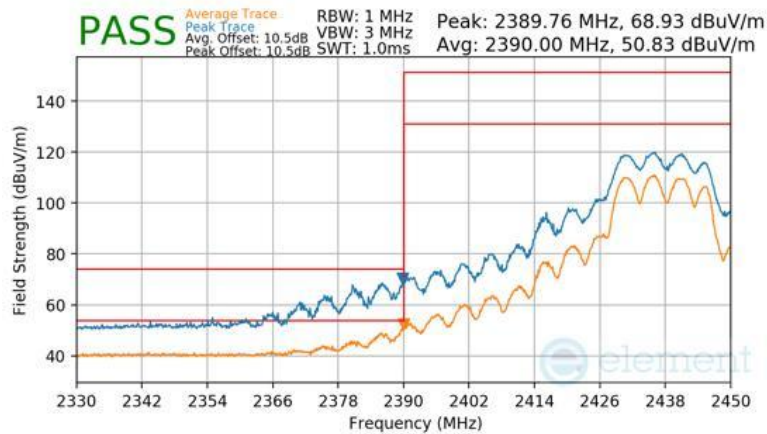


Plot 7-216 Radiated Restricted Lower Band Edge Measurement CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 154 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11n
 MCS7
 3 Meters
 2437 MHz
 6

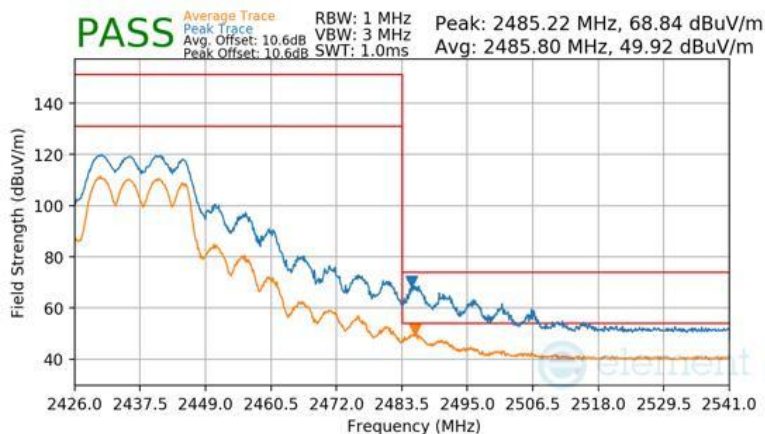

Plot 7-217 Radiated Restricted Upper Band Edge Measurement CDD Primary

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11n
 MCS7
 3 Meters
 2442 MHz
 7

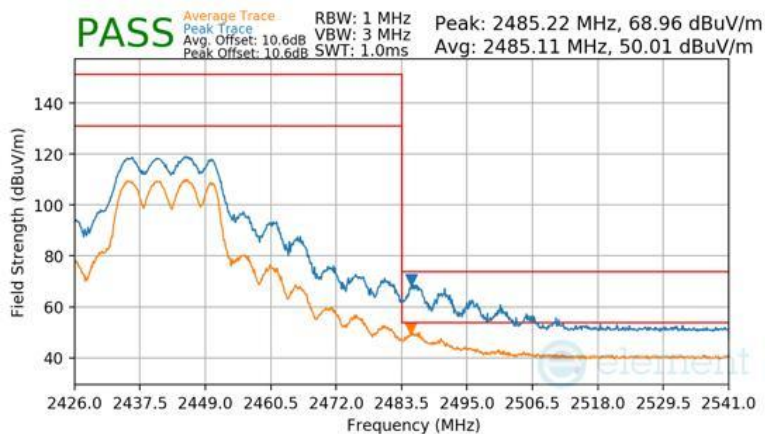


Plot 7-218 Radiated Restricted Upper Band Edge Measurement CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 155 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11n
 MCS7
 3 Meters
 2447 MHz
 8

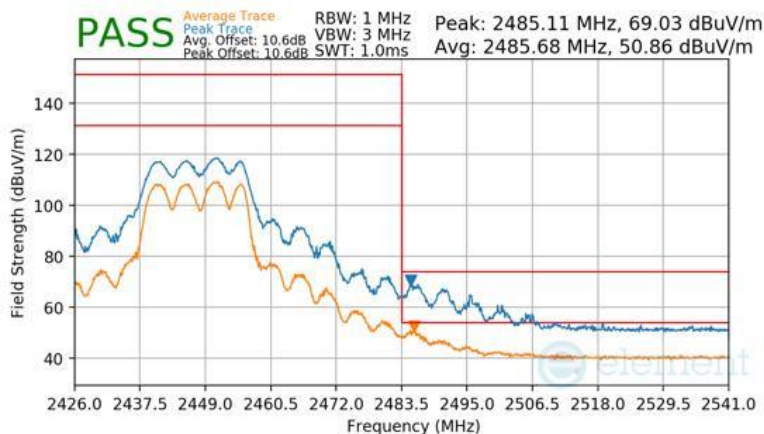

Plot 7-219 Radiated Restricted Upper Band Edge Measurement CDD Primary

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11n
 MCS7
 3 Meters
 2452 MHz
 9

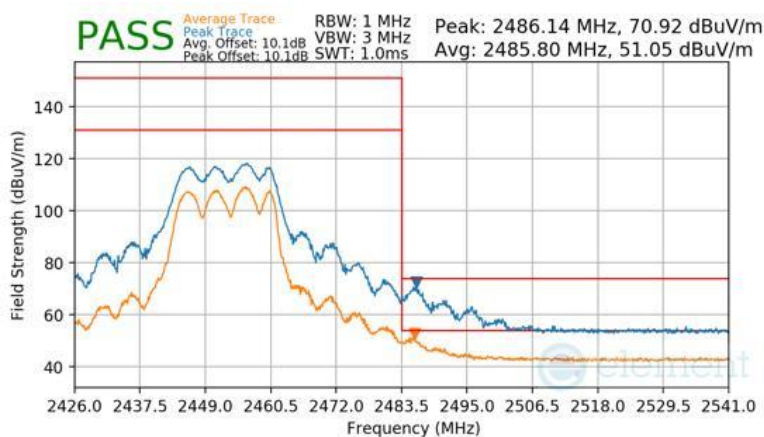


Plot 7-220 Radiated Restricted Upper Band Edge Measurement CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11n
 MCS7
 3 Meters
 2457 MHz
 10

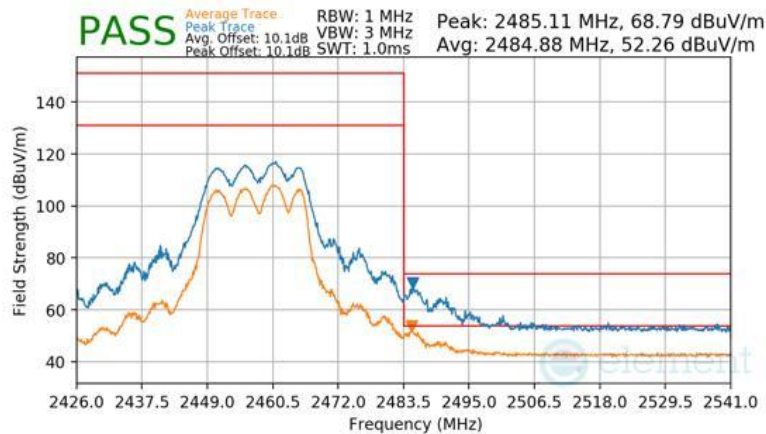

Plot 7-221 Radiated Restricted Upper Band Edge Measurement CDD Primary

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11n
 MCS7
 3 Meters
 2462 MHz
 11

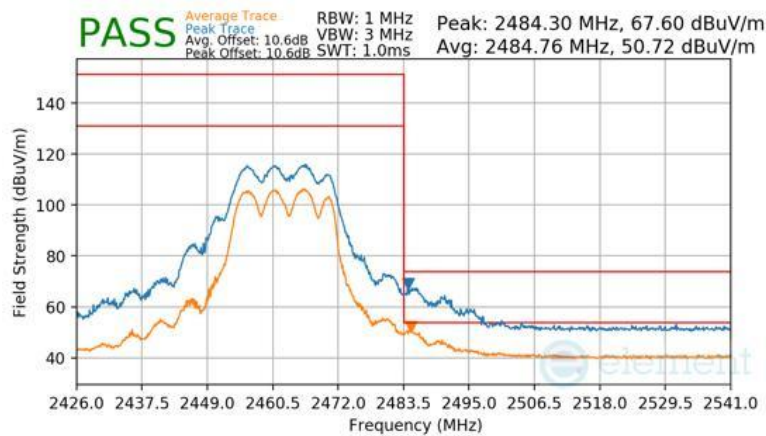


Plot 7-222 Radiated Restricted Upper Band Edge Measurement CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 157 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11n
MCS7
3 Meters
2467 MHz
12

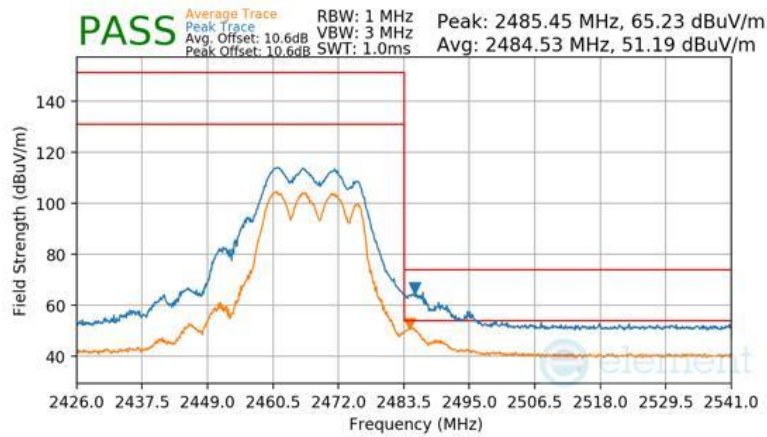

Plot 7-223 Radiated Restricted Upper Band Edge Measurement CDD Primary

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11n
MCS7
3 Meters
2472 MHz
13

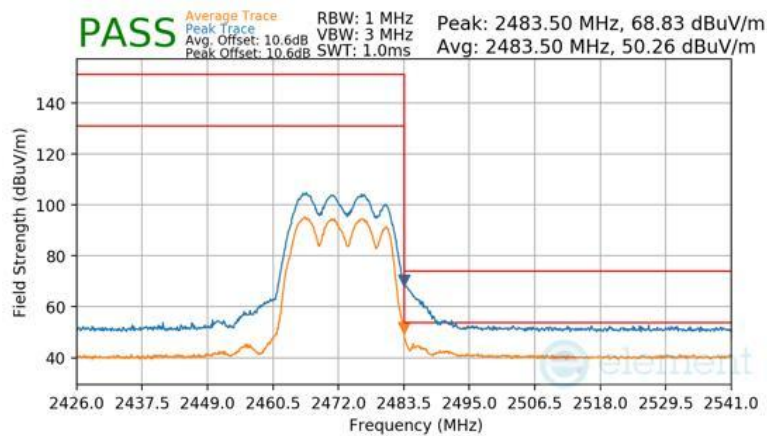


Plot 7-224 Radiated Restricted Upper Band Edge Measurement CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 158 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS9
 3 Meters
 2412 MHz
 1

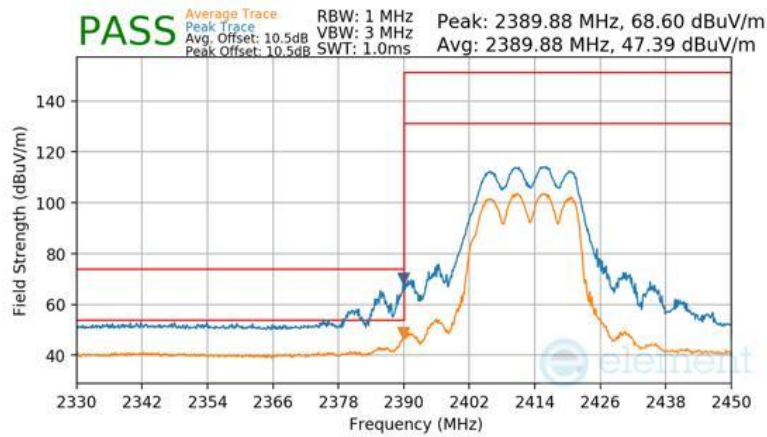

Plot 7-225 Radiated Restricted Lower Band Edge Measurement CDD Primary

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS9
 3 Meters
 2417 MHz
 2

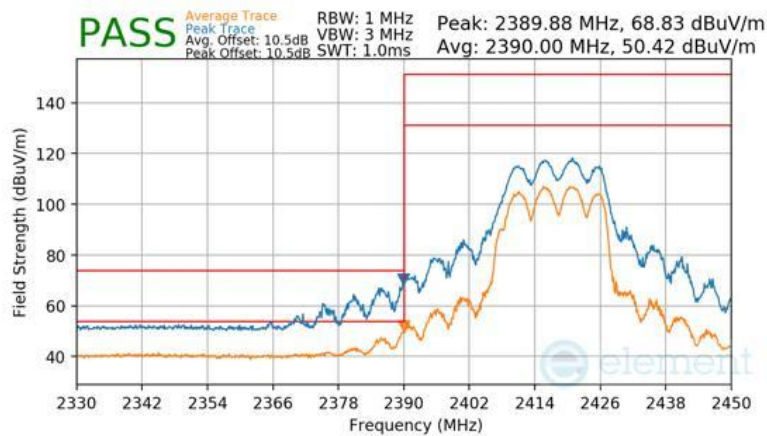


Plot 7-226 Radiated Restricted Lower Band Edge Measurement CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 159 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS9
 3 Meters
 2422 MHz
 3

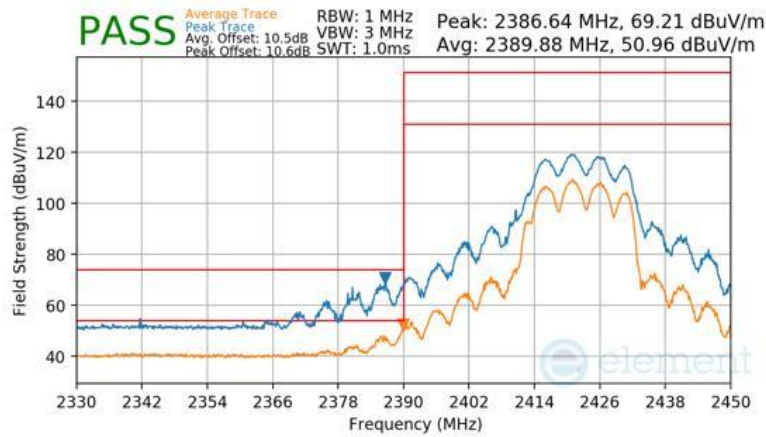

Plot 7-227 Radiated Restricted Lower Band Edge Measurement CDD Primary

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS9
 3 Meters
 2427 MHz
 4

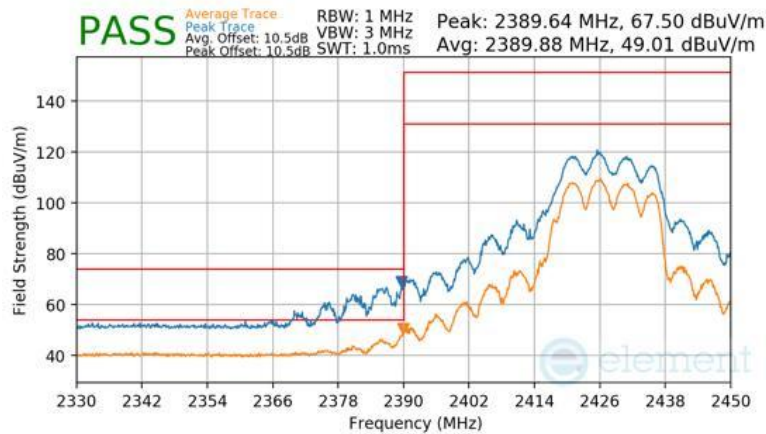


Plot 7-228 Radiated Restricted Lower Band Edge Measurement CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 160 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS9
 3 Meters
 2432 MHz
 5

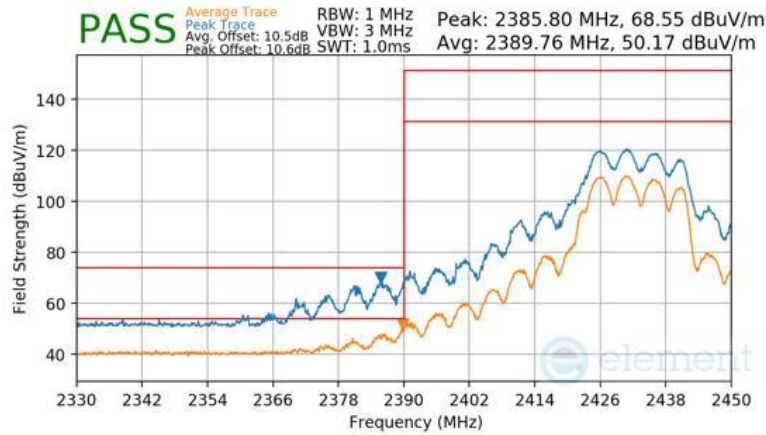

Plot 7-229 Radiated Restricted Lower Band Edge Measurement CDD Primary

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS9
 3 Meters
 2437 MHz
 6

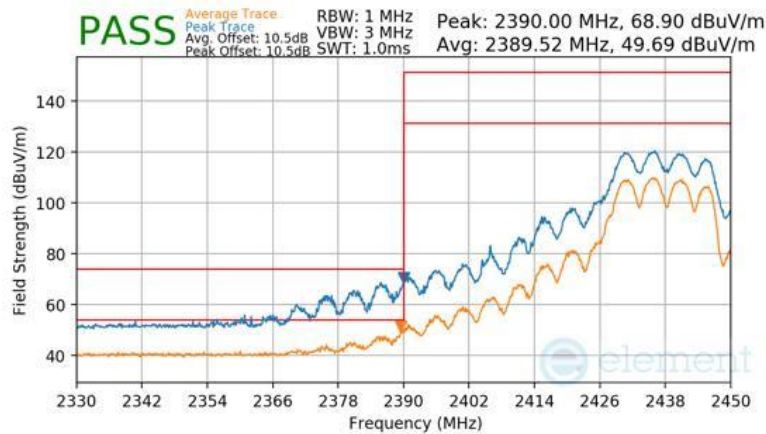


Plot 7-230 Radiated Restricted Lower Band Edge Measurement CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 161 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS9
 3 Meters
 2437 MHz
 6

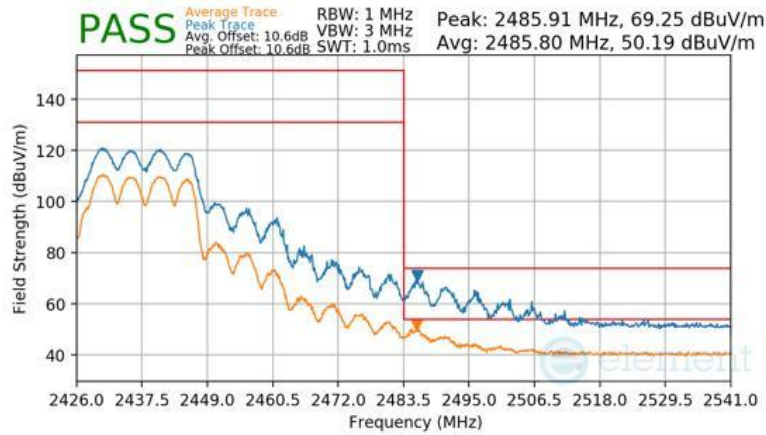

Plot 7-231 Radiated Restricted Upper Band Edge Measurement CDD Primary

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS9
 3 Meters
 2442 MHz
 7

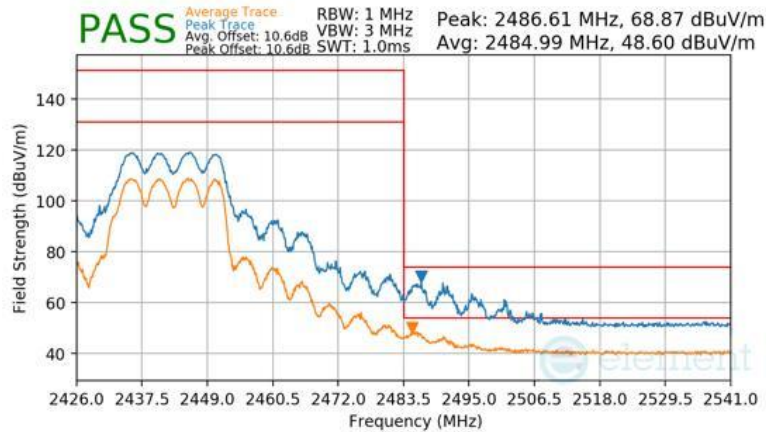


Plot 7-232 Radiated Restricted Upper Band Edge Measurement CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS9
 3 Meters
 2447 MHz
 8

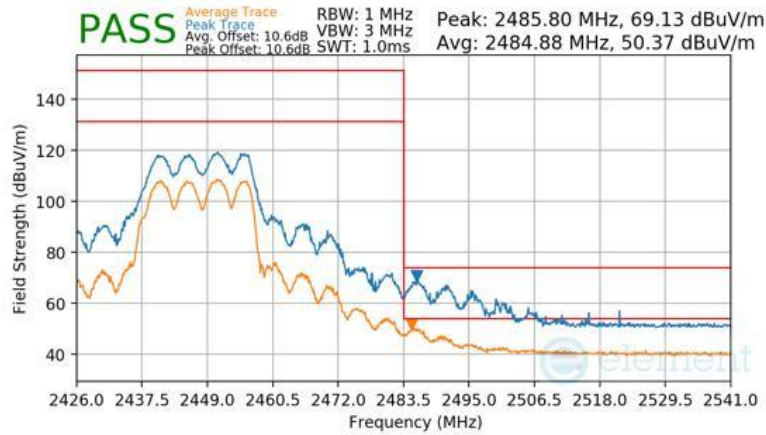

Plot 7-233 Radiated Restricted Upper Band Edge Measurement CDD Primary

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS9
 3 Meters
 2452 MHz
 9

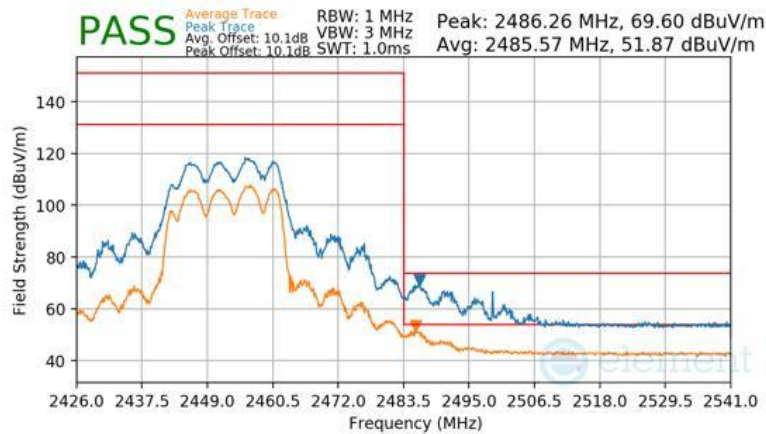


Plot 7-234 Radiated Restricted Upper Band Edge Measurement CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 163 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS9
 3 Meters
 2457 MHz
 10

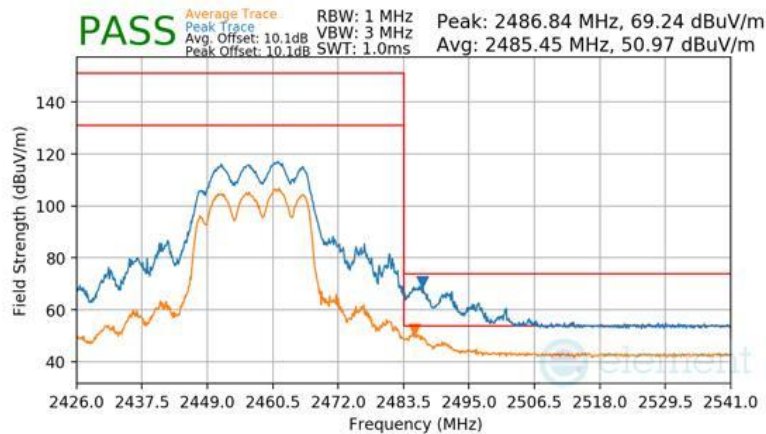

Plot 7-235 Radiated Restricted Upper Band Edge Measurement CDD Primary

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS9
 3 Meters
 2462 MHz
 11

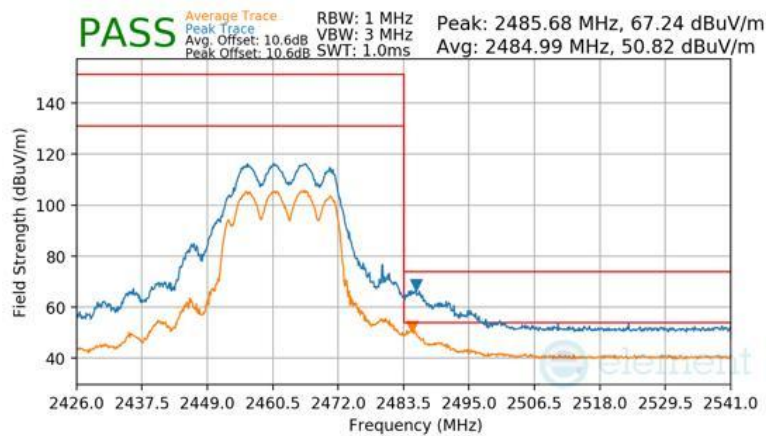


Plot 7-236 Radiated Restricted Upper Band Edge Measurement CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 164 of 177

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS9
 3 Meters
 2467 MHz
 12

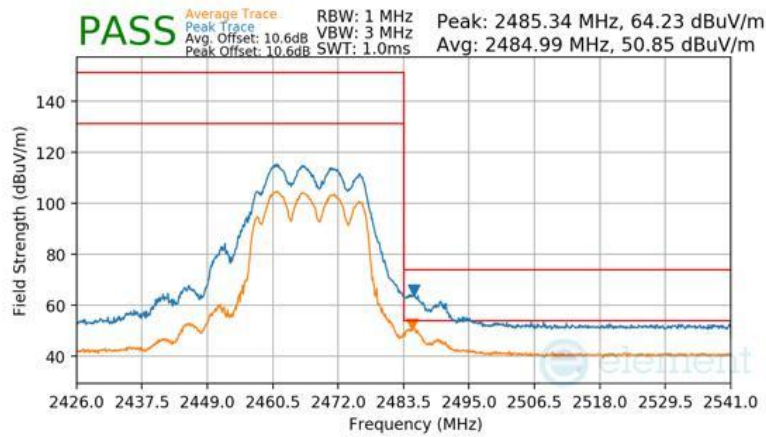

Plot 7-237 Radiated Restricted Upper Band Edge Measurement CDD Primary

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS9
 3 Meters
 2472 MHz
 13

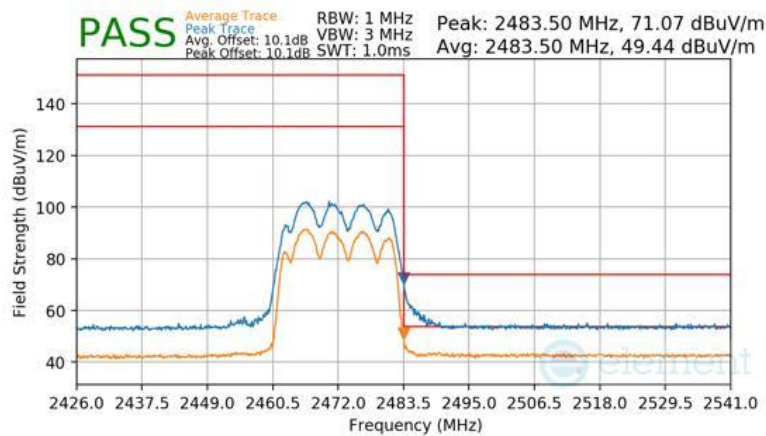

Plot 7-238 Radiated Restricted Upper Band Edge Measurement CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 165 of 177

7.9 Radiated Spurious Emissions – Below 1 GHz

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (7.5) must not exceed the limits shown in Table 7-31 per Section 15.209 and RSS-Gen (7.4.3).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-31. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120 kHz (for emissions from 30 MHz – 1 GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120 kHz (for emissions from 30 MHz – 1 GHz)
3. VBW = 300 kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 166 of 177

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

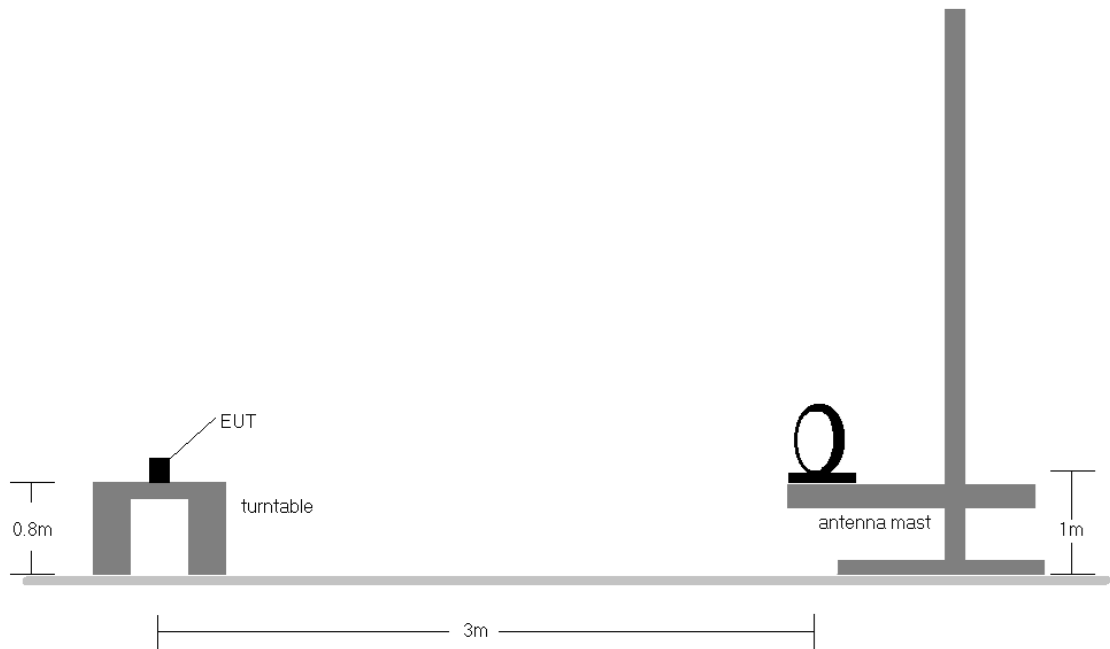


Figure 7-8. Radiated Test Setup < 30 Mhz

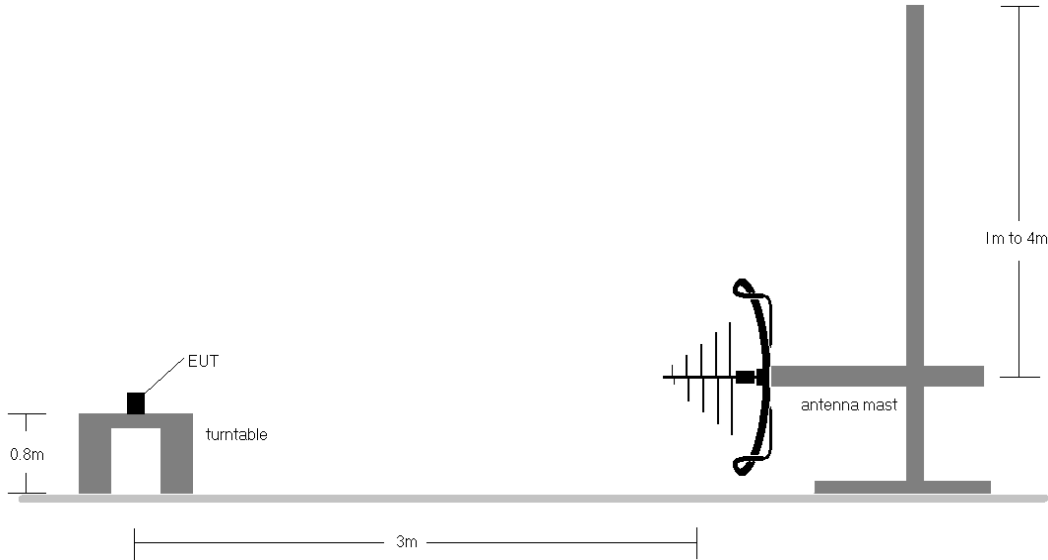


Figure 7-9. Radiated Test Setup < 1 GHz

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 167 of 177

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (7.5) are below the limit shown in Table 7-31.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30 MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6 dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20 dB of the limit below 30 MHz.
8. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
9. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
10. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification.
11. The unit was tested with all possible modes and only the highest emission is reported.
12. All antenna configurations were investigated and only the worst case is reported.


Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $[\text{dB}\mu\text{V/m}] = \text{Analyzer Level} [\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- $\text{AFCL} [\text{dB/m}] = \text{Antenna Factor} [\text{dB/m}] + \text{Cable Loss} [\text{dB}] - \text{Preamplifier Gain} [\text{dB}]$
- $\text{Margin} [\text{dB}] = \text{Field Strength Level} [\text{dB}\mu\text{V/m}] - \text{Limit} [\text{dB}\mu\text{V/m}]$

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 168 of 177

CDD Radiated Spurious Emissions Measurements (Below 1 GHz)

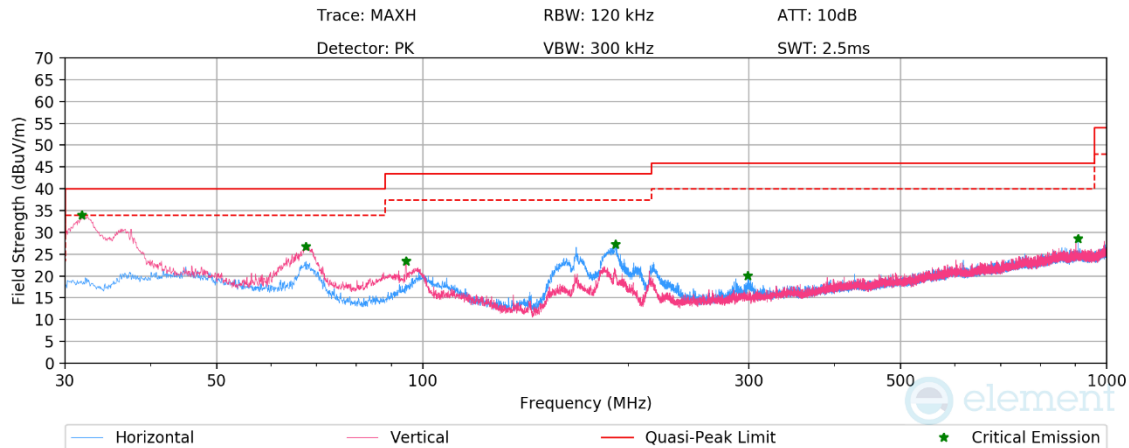


Plot 7-239. Radiated Spurious Emissions Below 1 GHz CDD 11n Ch.6, with AC/DC Adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
31.74	Max Peak	V	100	231	-51.37	-21.64	33.99	40.00	-6.01
67.44	Max Peak	V	300	153	-59.34	-20.89	26.77	40.00	-13.23
94.50	Max Peak	V	100	152	-63.32	-20.21	23.48	43.50	-20.02
191.23	Max Peak	H	100	187	-60.88	-18.87	27.25	43.50	-16.25
298.87	Max Peak	H	100	260	-71.26	-15.72	20.02	46.00	-25.98
909.04	Max Peak	H	200	262	-74.43	-4.05	28.51	46.00	-17.49

Table 7-32. Radiated Spurious Emissions Below 1 GHz CDD 11n Ch.6, with AC/DC Adaptor

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 169 of 177

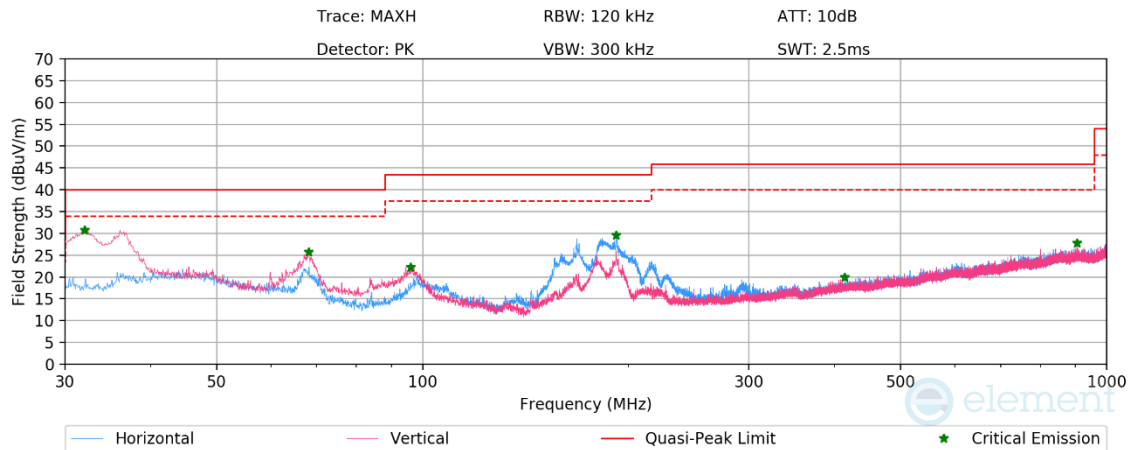

Plot 7-240. Radiated Spurious Emissions Below 1 GHz CDD 11be - SU Ch.6, with AC/DC Adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
32.04	Max Peak	V	100	276	-54.64	-21.66	30.70	40.00	-9.30
68.16	Max Peak	V	300	152	-60.08	-21.18	25.74	40.00	-14.26
95.94	Max Peak	V	100	344	-64.78	-19.91	22.31	43.50	-21.19
191.89	Max Peak	H	100	208	-58.64	-18.77	29.58	43.50	-13.92
414.14	Max Peak	H	100	341	-74.43	-12.67	19.90	46.00	-26.10
905.50	Max Peak	H	300	112	-75.21	-4.01	27.78	46.00	-18.22

Table 7-33. Radiated Spurious Emissions Below 1 GHz CDD 11be - SU Ch.6, with AC/DC Adaptor

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 170 of 177

7.10 AC Line-Conducted Emissions Measurement

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (7.4.2).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-34. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150 kHz – 30 MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150 kHz – 30 MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 171 of 177

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


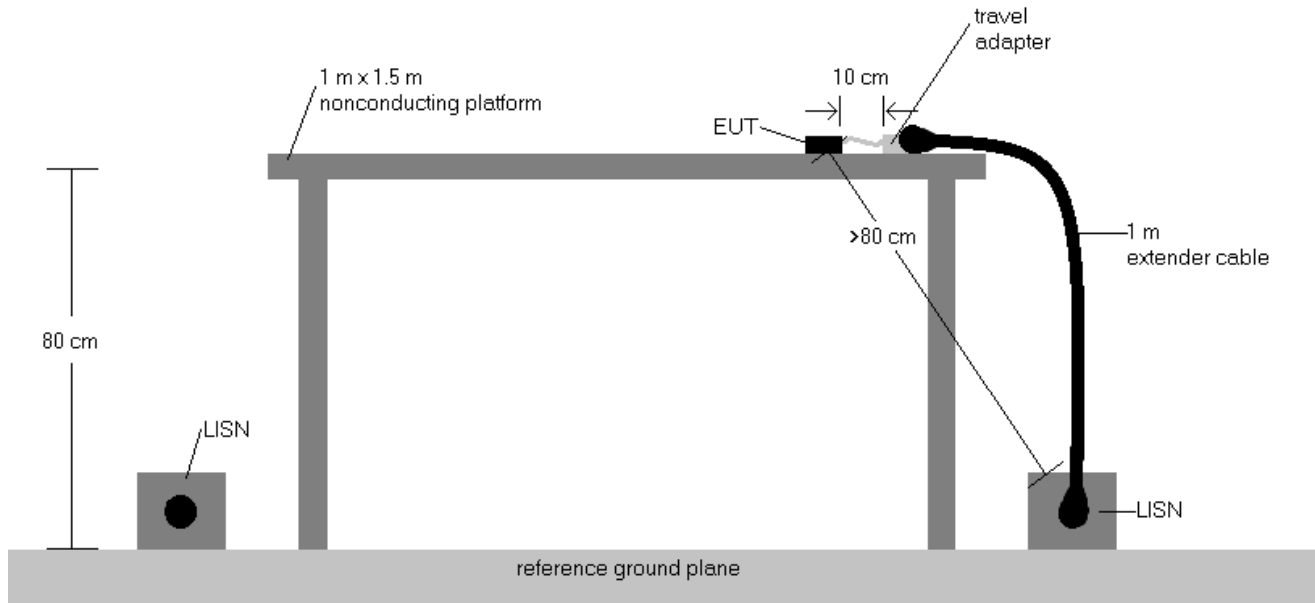


Figure 7-10. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150 kHz to 30 MHz are specified in Part 15.207 and RSS-Gen (7.4.2).
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plot are made using quasi peak and average detectors.
8. Deviations to the Specifications: None.
9. The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 172 of 177

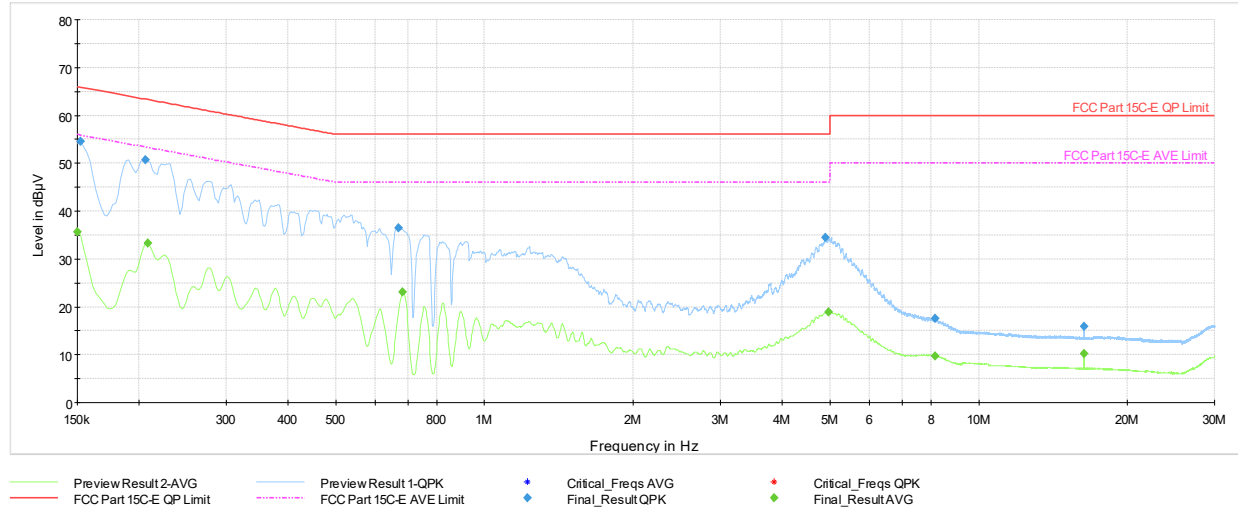


Plot 7-241. AC Line Conducted Plot with CDD 11n Ch.6 (L1, with AC/DC Adaptor)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.15	FINAL	---	35.68	56.00	-20.32	L1	GND
0.15	FINAL	54.59	---	65.88	-11.29	L1	GND
0.21	FINAL	50.70	---	63.36	-12.66	L1	GND
0.21	FINAL	---	33.38	53.27	-19.89	L1	GND
0.67	FINAL	36.40	---	56.00	-19.60	L1	GND
0.68	FINAL	---	23.05	46.00	-22.95	L1	GND
4.89	FINAL	34.49	---	56.00	-21.51	L1	GND
4.96	FINAL	---	18.99	46.00	-27.01	L1	GND
8.16	FINAL	17.53	---	60.00	-42.47	L1	GND
8.17	FINAL	---	9.73	50.00	-40.27	L1	GND
16.33	FINAL	---	10.22	50.00	-39.78	L1	GND
16.33	FINAL	15.84	---	60.00	-44.16	L1	GND

Table 7-35. AC Line Conducted Data with CDD 11n Ch.6 (L1, with AC/DC Adaptor)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 173 of 177

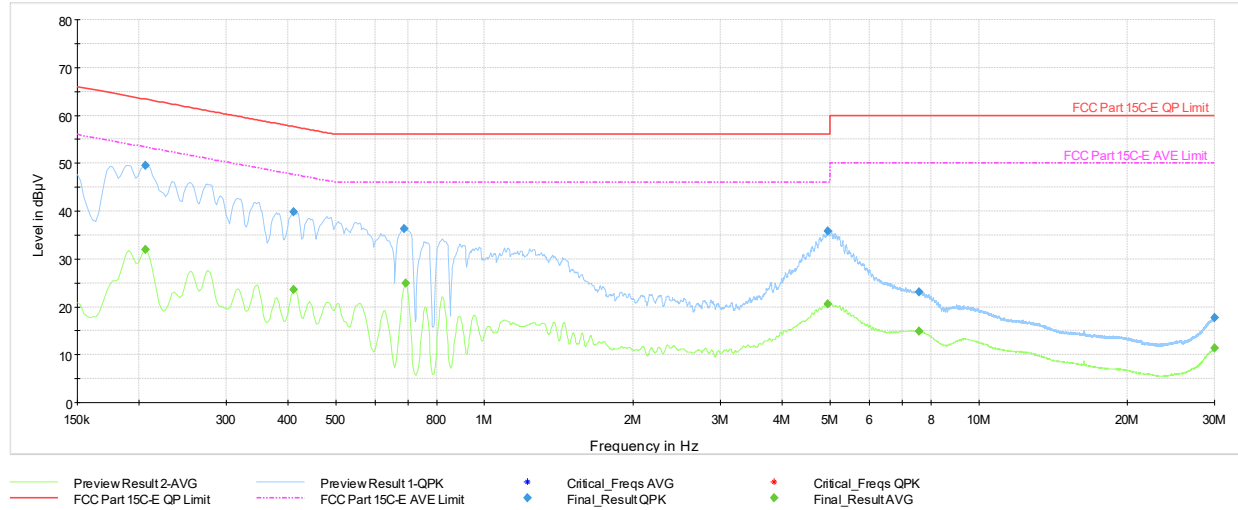


Plot 7-242. AC Line Conducted Plot with CDD 11n Ch.6 (N, with AC/DC Adaptor)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.21	FINAL	---	31.90	53.36	-21.46	N	GND
0.21	FINAL	49.56	---	63.36	-13.80	N	GND
0.41	FINAL	---	23.56	47.63	-24.07	N	GND
0.41	FINAL	39.78	---	57.63	-17.85	N	GND
0.69	FINAL	36.34	---	56.00	-19.66	N	GND
0.69	FINAL	---	24.90	46.00	-21.10	N	GND
4.95	FINAL	---	20.66	46.00	-25.34	N	GND
4.95	FINAL	35.85	---	56.00	-20.15	N	GND
7.56	FINAL	---	14.82	50.00	-35.18	N	GND
7.57	FINAL	23.07	---	60.00	-36.93	N	GND
30.00	FINAL	---	11.40	50.00	-38.60	N	GND
30.00	FINAL	17.69	---	60.00	-42.31	N	GND

Table 7-36. AC Line Conducted Data with CDD 11n Ch.6 (N, with AC/DC Adaptor)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 174 of 177

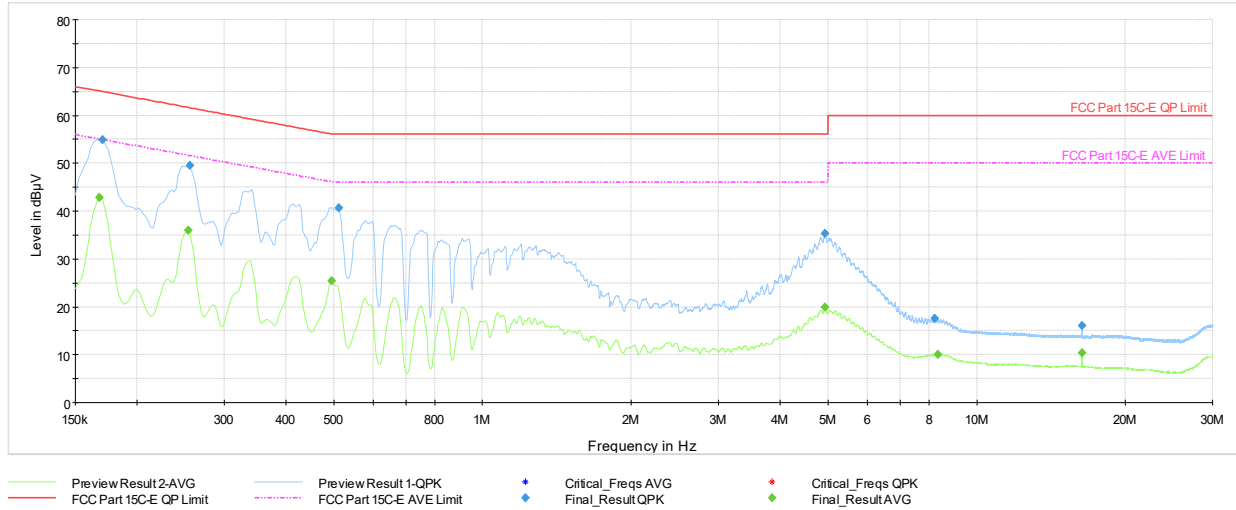


Plot 7-243. AC Line Conducted Plot with CDD 11be - SU Ch.6 (L1, with AC/DC Adaptor)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.17	FINAL	---	42.84	55.06	-12.22	L1	GND
0.17	FINAL	54.93	---	64.95	-10.02	L1	GND
0.25	FINAL	---	35.90	51.64	-15.74	L1	GND
0.26	FINAL	49.55	---	61.57	-12.02	L1	GND
0.49	FINAL	---	25.37	46.10	-20.73	L1	GND
0.51	FINAL	40.75	---	56.00	-15.25	L1	GND
4.93	FINAL	---	19.91	46.00	-26.09	L1	GND
4.94	FINAL	35.32	---	56.00	-20.68	L1	GND
8.21	FINAL	17.63	---	60.00	-42.37	L1	GND
8.33	FINAL	---	10.11	50.00	-39.89	L1	GND
16.34	FINAL	---	10.39	50.00	-39.61	L1	GND
16.34	FINAL	16.10	---	60.00	-43.90	L1	GND

Table 7-37. AC Line Conducted Data with CDD 11be - SU Ch.6 (L1, with AC/DC Adaptor)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 175 of 177

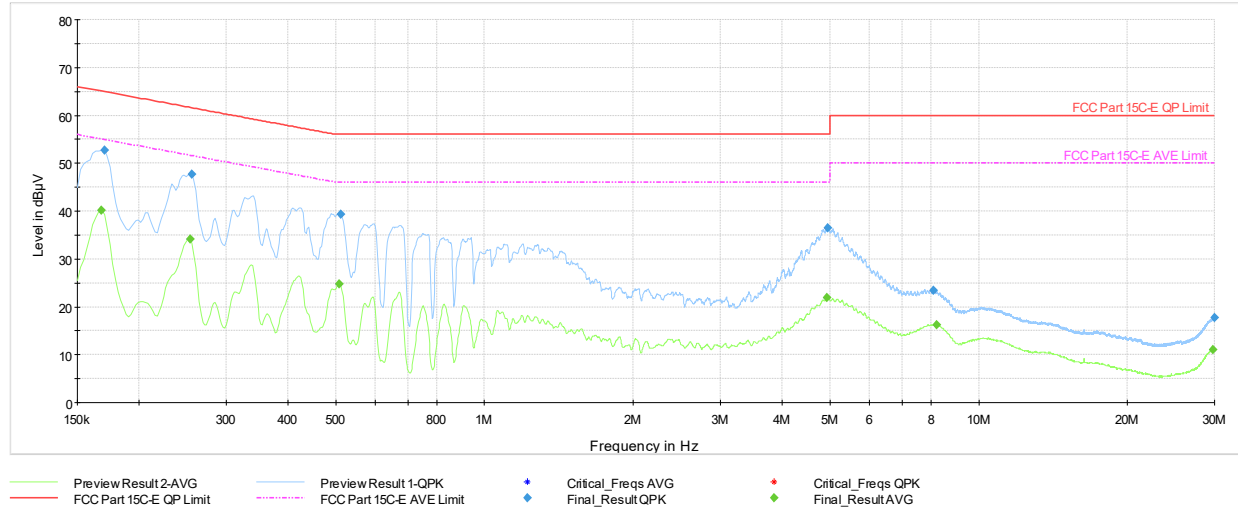

Plot 7-244. AC Line Conducted Plot with CDD 11be - SU Ch.6 (N, with AC/DC Adaptor)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.17	FINAL	---	40.25	55.06	-14.81	N	GND
0.17	FINAL	52.79	---	64.95	-12.16	N	GND
0.25	FINAL	---	34.10	51.64	-17.54	N	GND
0.26	FINAL	47.73	---	61.57	-13.84	N	GND
0.51	FINAL	---	24.78	46.00	-21.22	N	GND
0.51	FINAL	39.41	---	56.00	-16.59	N	GND
4.93	FINAL	---	21.85	46.00	-24.15	N	GND
4.94	FINAL	36.42	---	56.00	-19.58	N	GND
8.10	FINAL	23.45	---	60.00	-36.55	N	GND
8.21	FINAL	---	16.28	50.00	-33.72	N	GND
29.75	FINAL	---	11.02	50.00	-38.98	N	GND
30.00	FINAL	17.82	---	60.00	-42.18	N	GND

Table 7-38. AC Line Conducted Data with CDD 11be - SU Ch.6 (N, with AC/DC Adaptor)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 176 of 177

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3595, IC: 579C-A3595** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/2026 - 8/28/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-01-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 177 of 177

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.