


Test report no.: <i>Prüfbericht-Nr.:</i>	CN25SVED 002	Order No.: <i>Auftragsnr.:</i>	170437865	Page 1 of 21 <i>Seite 1 von 21</i>
Client reference no.: <i>Kunden-Referenz-Nr.:</i>	N/A	Order date: <i>Auftragsdatum:</i>	2025.12.03	
Client: <i>Auftraggeber:</i>	GoPro, Inc. 3025 Clearview Way, San Mateo, CA 94402, USA			
Test item: <i>Prüfgegenstand:</i>	Camera			
Identification / Type no.: <i>Bezeichnung / Typ-Nr.:</i>	TPSB1			
Order content: <i>Auftrags-Inhalt:</i>	Test Report			
Test specification <i>Prüfgrundlage:</i>	CFR47 FCC Part 15: Subpart C Section 15.247 RSS-247 Issue 4 July 24, 2025 RSS-Gen Issue 5 February 2021			
Date of sample receipt: <i>Wareneingangsdatum:</i>	2025.12.03	Please refer to Photo Document		
Test sample no: <i>Prüfmuster-Nr.:</i>	170437865-001~003			
Testing period: <i>Prüfzeitraum:</i>	Refer to test report			
Place of testing: <i>Ort der Prüfung:</i>	Refer to section 2.1			
Testing laboratory: <i>Prüflaboratorium:</i>	TÜV Rheinland (Guangdong) Ltd.			
Test result*: <i>Prüfergebnis*:</i>	Pass			
tested by: <i>geprüft von:</i>		authorized by: <i>genehmigt von:</i>		
Date: 2026-01-22 <i>Datum:</i>	<i>Signed by: Amy Wang</i>	Issue date: 2026-01-22 <i>Ausstellungsdatum:</i>	<i>Signed by: Storm Shu</i>	
Position / Stellung:	Expert/Sachverständige(r)	Position / Stellung:	Expert/Sachverständige(r)	
Other: <i>Sonstiges:</i>	FCC ID: CNFTPSB1, IC: 10193A-TPSB1, HVIN: TPSB1 This report is for 2.4GHz Wi-Fi only.			
Condition of the test item at delivery: <i>Zustand des Prüfgegenstandes bei Anlieferung:</i>	Test item complete and undamaged Prüfmuster vollständig und unbeschädigt			
* Legend: P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
* Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet				
This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark. <i>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</i>				

Test report no.: CN25SVED 002
Prüfbericht-Nr.:

Page 2 of 21
Seite 2 von 21

Remarks
Anmerkungen

1	The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request. <i>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</i>
2	As contractually agreed, this document has been signed digitally only. TÜV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TÜV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. <i>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben.</i>
3	Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report. Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report. <i>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</i>
4	The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019. <i>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</i>

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 CONDUCTED POWER SPECTRAL DENSITY

RESULT: Pass

5.1.4 6dB BANDWIDTH

RESULT: Pass

5.1.5 99% BANDWIDTH

RESULT: Pass

5.1.6 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH

RESULT: Pass

5.1.7 RADIATED SPURIOUS EMISSION

RESULT: Pass

5.1.8 AC CONDUCTED EMISSION

RESULT: Pass

Contents

TEST SUMMARY	3
CONTENTS	4
1 GENERAL REMARKS	5
1.1 COMPLEMENTARY MATERIALS	5
2 TEST SITES	5
2.1 TEST FACILITIES	5
2.2 LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
2.3 TRACEABILITY	6
2.4 CALIBRATION	6
2.5 MEASUREMENT UNCERTAINTY	6
2.6 LOCATION OF ORIGINAL DATA	7
2.7 STATUS OF FACILITY USED FOR TESTING	7
3 GENERAL PRODUCT INFORMATION	8
3.1 PRODUCT FUNCTION AND INTENDED USE	8
3.2 RATINGS AND SYSTEM DETAILS	8
3.3 INDEPENDENT OPERATION MODES	9
3.4 NOISE GENERATING AND NOISE SUPPRESSING PARTS	9
3.5 SUBMITTED DOCUMENTS	9
4 TEST SET-UP AND OPERATION MODES	10
4.1 PRINCIPLE OF CONFIGURATION SELECTION	10
4.2 TEST OPERATION AND TEST SOFTWARE	10
4.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4 COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	10
4.5 TEST SETUP DIAGRAM	11
5 TEST RESULTS	12
5.1 TRANSMITTER REQUIREMENT & TEST SUITES	12
5.1.1 Antenna Requirement	12
5.1.2 Maximum Peak Conducted Output Power	13
5.1.3 Conducted Power Spectral Density	15
5.1.4 6dB Bandwidth	16
5.1.5 99% Bandwidth	17
5.1.6 Conducted Spurious Emissions Measured in 100 kHz Bandwidth	18
5.1.7 Radiated Spurious Emission	19
5.1.8 AC Conducted Emission	20
6 PHOTOGRAPHS OF THE TEST SET-UP	21
7 LIST OF TABLES	21

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of Test Set-up

Appendix B: Test Results of Wi-Fi 802.11 b/g/n/ax

2 Test Sites

2.1 Test Facilities

Site 1

Company name:

TÜV Rheinland (Guangdong) Co., Ltd.
No.102, 1F of Southwest and No.205, 2F of West
Warehouse Building, No.767 Tianyuan Road, Tianhe
District, Guangzhou, Guangdong, P.R. China

FCC Registration No.

CN1207

ISED wireless device testing laboratory

11493A

CAB Identifier

CN0018

Site 2

Company name:

CTC Laboratories, Inc.
Room 107, 108, 207, 208, 303 of Building A, Room 101 of
Building B, No.7, Lanqing 1st Road, Luhua Community,
Guanhu Subdistrict, Longhua District, Shenzhen,
Guangdong, China.

FCC Registration No.

951311

ISED wireless device testing laboratory

9783A

CAB Identifier

CN0029

Remark:

All the tests were performed on Test site 2.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (SRD-Tonscend)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
Spectrum Analyzer	R&S	FSV40-N	101654	Dec. 12, 2025
Spectrum Analyzer	R&S	FSV40-N	101654	Dec. 12, 2026
RF Control Unit	Tonscend	JS0806-2	/	Dec. 12, 2025
Spectrum Analyzer	R&S	FSV40-N	101654	Dec. 12, 2026
Test Software	Tonscend	JS1120-3	N/A	N/A
Unwanted Emission Testing				
Equipment	Manufacturer	Model	Serial No.	Cal. until
Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-759	Oct. 16, 2027
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-648	Dec. 11, 2026
Test Receiver	Keysight	N9038A	MY56400071	Dec. 12, 2026
Broadband Amplifier	Schwarzbeck	BBV9743B	259	Dec. 12, 2026
Mirowave Broadband Amplifier	Schwarzbeck	BBV9718C	111	Dec. 12, 2026
SHF-EHF Horn Antenna	Schwarzbeck	BBHA 9170	013551	Dec. 12, 2026
Low noise Amplifier	Tonscend	TAP180040048	AP24C8060348	Dec. 12, 2026
Test software	FARA	EZ-EMC (FA-03A2)	N/A	N/A
3m Semi-Anechoic Chamber	YIHENG	EE106	/	Aug. 28, 2026

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Parameter	Uncertainty
20dB Emission Bandwidth	±0.0196%
Carrier Frequency Separation	±1.9%
Number of Hopping Channel	±1.9%
Time of Occupancy	±0.028%
Max Peak Conducted Output Power	±0.743 dB
Band-edge Spurious Emission	±1.328 dB
Conducted RF Spurious Emission	9kHz-1GHz: ±0.746dB 1GHz-26GHz: ±1.328dB
Conducted Emissions 9kHz~30MHz	±3.08 dB
Radiated Emissions 30~1000MHz	±4.51 dB
Radiated Emissions 1~18GHz	±5.84 dB
Radiated Emissions 18~40GHz	±6.12 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Guangdong) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The CTC Laboratories, Inc. Test facility located at Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhuhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China.

3 General Product Information

3.1 Product Function and Intended Use

The Product is WI-FI + BT combo module, which supports Bluetooth, 2.4GHz Wi-Fi 802.11 b/g/n/ax and 5GHz Wi-Fi 802.11a/n/ac/ax wireless technology.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	Camera
Type Designation:	TPSB1
FCC ID:	CNFTPSB1
IC:	10193A-TPSB1
HVIN:	TPSB1
Operating Voltage:	3.86Vdc, 2150mAh supplied by a rechargeable Lithium Ion Battery, 5Vdc/9Vdc 3A supplied by USB type C port
Antenna Type:	Internal Integrated metal antenna
Antenna Gain:	Wi-Fi Antenna #: Max gain 1.37dBi for 2.4GHz Wi-Fi Max gain 1.96dBi for 5GHz Wi-Fi U-NII-1 Max gain 2.93dBi for 5GHz Wi-Fi U-NII-2A Max gain 2.75dBi for 5GHz Wi-Fi U-NII-2C Max gain 2.33dBi for 5GHz Wi-Fi U-NII-3 BT Antenna #: Max gain 1.37dBi for Bluetooth
Technical Specification of Bluetooth	
Operating Frequency:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Channel Number:	BDR/EDR:79 channels; BLE:40 Channels
Channel Separation:	BDR/EDR: 1MHz; BLE: 2MHz
Technical Specification of Wi-Fi 802.11 b/g/n/ax	
Operating Frequency:	2412 - 2462 MHz for 802.11b/g/n(HT20)/ax(HE20) 2422 - 2452 MHz for 802.11n(HT40)/ax(HE40)
Type of Modulation:	DSSS(DBPSK/DQPSK/CCK) OFDM(BPSK/QPSK/16-QAM/64-QAM) OFDMA(BPSK/QPSK/16-QAM/64-QAM/256-QAM/1024-QAM)
Data Rate:	1/2/5.5/11 Mbps for 802.11b 6/9/12/18/24/36/48/54 Mbps for 802.11g MCS0 ~ MCS7 for 802.11n MCS0 ~ MCS11 for 802.11ax
Channel Number:	11 channels for 802.11b/g/n(HT20)/ax(HE20)

	7 channels for 802.11n(HT40)/802.11ax(HE40)
Channel Separation:	5 MHz
MIMO and SISO mode:	SISO for 802.11b/g/n/ax
Technical Specification of Wi-Fi 802.11 a/n/ac/ax	
Operating Frequency:	5180-5320MHz, 5500-5720MHz, 5745-5825MHz
Type of Modulation:	OFDM(BPSK/QPSK/16-QAM/64-QAM/256-QAM) OFDMA(BPSK/QPSK/16-QAM/64-QAM/256-QAM/1024-QAM)
Data Rate:	6/9/12/18/24/36/48/54 Mbps for 802.11a MCS0 ~ MCS7 for 802.11n MCS0 ~ MCS9 for 802.11ac MCS0 ~ MCS11 for 802.11ax
Operating Modes:	802.11 a/n20/n40/ac20/ac40/ac80/ax20/ax40/ax80
Channel Separation	5 MHz
MIMO and SISO mode:	SISO for 802.11a/n/ac/ax
DFS:	Slave without DFS Detection

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wi-Fi 802.11 b/g/n/ax wireless transmitting mode
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- B. On, Wi-Fi 802.11 b/g/n/ax connecting mode
- C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Application Form
- User Manual
- Block Diagram
- Operation Description

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2020.

According to clause 3.1, all tests were performed on model TPSB1 in this report.

Table 3: Test environments

Environment Parameter	Selected Values During Tests		
	Temperature	Voltage	Relative Humidity
NTNV	24.6°C	DC 3.86V	Ambient

Table 4: Test channel and frequency

Mode	Test Channels
802.11b/g/n(HT20)/ax(HE20)	L: CH01, 2412MHz; M: CH06, 2437MHz; H: CH11, 2462MHz
802.11n(HT40)/ax(HE40)	L: CH03, 2422MHz; M: CH06, 2437MHz; H: CH09, 2452MHz

4.3 Special Accessories and Auxiliary Equipment

Table 5: Auxiliary Equipment Used during Test

Description	Manufacturer	Model	S/N	Rating
Laptop	Lenovo	ThinkBook 14 G3 ACL	MP2462ZQ7	N/A
Charger	Anker	A2692	/	/

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

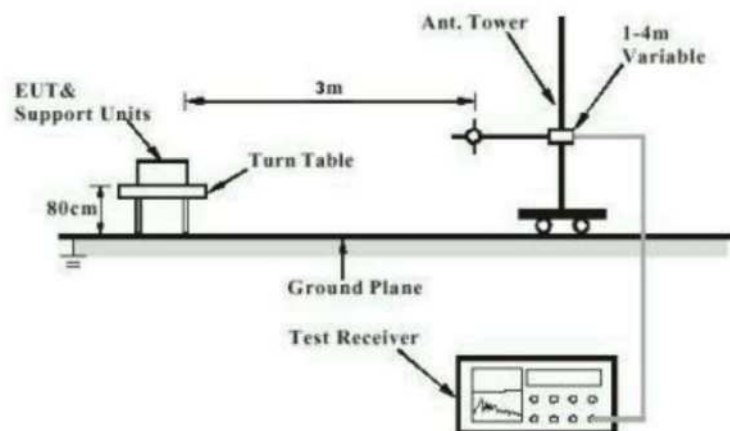


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)


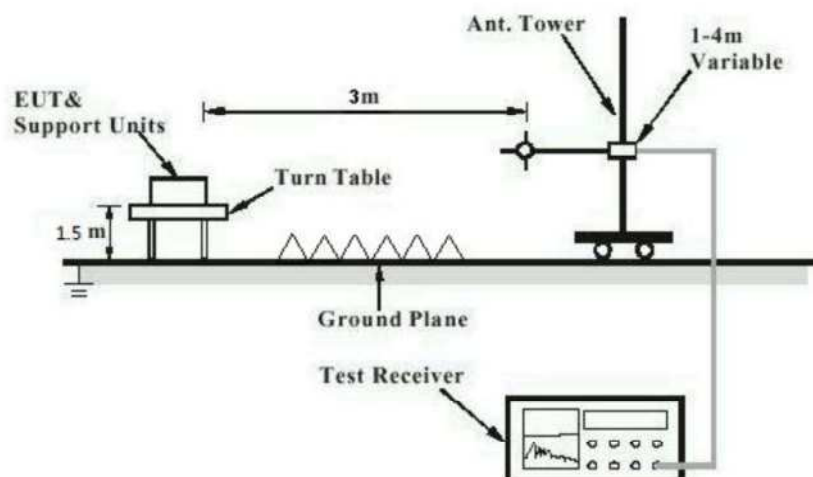


Diagram of Measurement Configuration for Conducted Transmitter Measurement

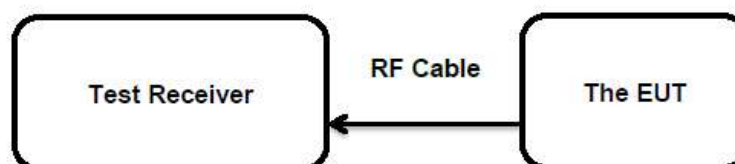

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT: **Pass**

Test Specification

Test standard : FCC Part 15.247(b)(4) and Part 15.203
RSS-Gen Clause 6.8

The EUT has integral antennas with a unique connector, which is designed with permanent attachment and no consideration of replacement. The maximum antenna gain is 1.37 dBi.

Therefore, the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 Maximum Peak Conducted Output Power

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(b)(3)
RSS-247 Clause 6.3.2
Basic standard : ANSI C63.10: 2020
Limits : 1.0 Watts
Kind of test site : Shielded Room

Test Setup

Date of testing : 2025-12-11 to 2025-12-30
Input voltage : 3.86Vdc, 2150mAh supplied by a rechargeable Lithium Ion Battery, 5Vdc/9Vdc 3A supplied by USB type C port
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 24.6 °C
Relative humidity : 55 %
Atmospheric pressure : 101 kPa

Table 6: Test Result of Maximum Output Power, Wi-Fi 802.11 b/g/n/ax

TestMode	Antenna	Frequency [MHz]	Conducted Power[dBm]	Conducted Limit[dBm]	Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11B	Ant1	2412	16.27	≤30.00	1.37	17.64	≤36.00	PASS
		2437	15.94	≤30.00	1.37	17.31	≤36.00	PASS
		2462	15.71	≤30.00	1.37	17.08	≤36.00	PASS
11G	Ant1	2412	17.29	≤30.00	1.37	18.66	≤36.00	PASS
		2437	17.18	≤30.00	1.37	18.55	≤36.00	PASS
		2462	17.47	≤30.00	1.37	18.84	≤36.00	PASS
11N20SISO	Ant1	2412	17.57	≤30.00	1.37	18.94	≤36.00	PASS
		2437	17.87	≤30.00	1.37	19.24	≤36.00	PASS
		2462	16.71	≤30.00	1.37	18.08	≤36.00	PASS
11N40SISO	Ant1	2422	15.47	≤30.00	1.37	16.84	≤36.00	PASS
		2437	16.26	≤30.00	1.37	17.63	≤36.00	PASS
		2452	12.55	≤30.00	1.37	13.92	≤36.00	PASS

Test Mode	Antenna	Freq (MHz)	Ru Size	Ru Index	Conducted Power[dBm]	Conducted Limit[dBm]	Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11AX20SISO	Ant1	2412	26Tone	RU0	10.66	≤30.00	1.37	12.03	≤36.00	PASS
			52Tone	RU37	12.23	≤30.00	1.37	13.60	≤36.00	PASS
			106Tone	RU53	15.27	≤30.00	1.37	16.64	≤36.00	PASS
			242Tone	RU61	15.62	≤30.00	1.37	16.99	≤36.00	PASS
		2437	26Tone	RU4	10.64	≤30.00	1.37	12.01	≤36.00	PASS
			52Tone	RU38	12.26	≤30.00	1.37	13.63	≤36.00	PASS
			106Tone	RU53	15.14	≤30.00	1.37	16.51	≤36.00	PASS
			242Tone	RU61	16.48	≤30.00	1.37	17.85	≤36.00	PASS
		2462	26Tone	RU8	10.13	≤30.00	1.37	11.50	≤36.00	PASS
			52Tone	RU40	11.91	≤30.00	1.37	13.28	≤36.00	PASS
			106Tone	RU54	16.15	≤30.00	1.37	17.52	≤36.00	PASS
			242Tone	RU61	15.76	≤30.00	1.37	17.13	≤36.00	PASS
11AX40SISO	Ant1	2422	26Tone	RU0	7.69	≤30.00	1.37	9.06	≤36.00	PASS
			52Tone	RU37	12.36	≤30.00	1.37	13.73	≤36.00	PASS
			106Tone	RU53	15.14	≤30.00	1.37	16.51	≤36.00	PASS
			242Tone	RU61	16.47	≤30.00	1.37	17.84	≤36.00	PASS
			484Tone	RU65	14.86	≤30.00	1.37	16.23	≤36.00	PASS

		2437	26Tone	RU8	8.91	≤30.00	1.37	10.28	≤36.00	PASS
			52Tone	RU40	12.21	≤30.00	1.37	13.58	≤36.00	PASS
			106Tone	RU54	16.00	≤30.00	1.37	17.37	≤36.00	PASS
			242Tone	RU61	16.53	≤30.00	1.37	17.90	≤36.00	PASS
			484Tone	RU65	16.57	≤30.00	1.37	17.94	≤36.00	PASS
		2452	26Tone	RU17	7.60	≤30.00	1.37	8.97	≤36.00	PASS
			52Tone	RU44	12.57	≤30.00	1.37	13.94	≤36.00	PASS
			106Tone	RU56	15.32	≤30.00	1.37	16.69	≤36.00	PASS
			242Tone	RU62	16.36	≤30.00	1.37	17.73	≤36.00	PASS
			484Tone	RU65	13.40	≤30.00	1.37	14.77	≤36.00	PASS

Note:

- 1) The cable loss is taken into account in results.
- 2) The max conducted power for 2.4G WIFI is 17.87dBm;
 The max EIRP power for 2.4G WIFI is 19.24dBm
- 3) e.i.r.p.=P_(power)+ G, which is far below the 4 W (36dBm)

5.1.3 Conducted Power Spectral Density

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(e)
	: RSS-247 Clause 6.3.1(b)
Basic standard	: ANSI C63.10: 2020
Limits	: < 8 dBm / 3kHz
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-12-11 to 2025-12-30
Input voltage	: 3.86Vdc, 2150mAh supplied by a rechargeable Lithium Ion Battery, 5Vdc/9Vdc 3A supplied by USB type C port
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.6 °C
Relative humidity	: 55 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

5.1.4 6dB Bandwidth**RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.247(a)(2)
	:	RSS-247 Clause 6.3.1(a)
Basic standard	:	ANSI C63.10: 2020
Limits	:	> 500 KHz
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2025-12-11 to 2025-12-30
Input voltage	:	3.86Vdc, 2150mAh supplied by a rechargeable Lithium Ion Battery, 5Vdc/9Vdc 3A supplied by USB type C port
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	24.6 °C
Relative humidity	:	55 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix B.

5.1.5 99% Bandwidth

RESULT:

Pass

Test Specification

Test standard	:	FCC Part 15.247(a) RSS-Gen Clause 6.7
Basic standard	:	ANSI C63.10: 2020
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2025-12-11 to 2025-12-30
Input voltage	:	3.86Vdc, 2150mAh supplied by a rechargeable Lithium Ion Battery, 5Vdc/9Vdc 3A supplied by USB type C port
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	24.6 °C
Relative humidity	:	55 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix B.

5.1.6 Conducted Spurious Emissions Measured in 100 kHz Bandwidth**RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.247(d) RSS-247 Clause 6.6
Basic standard	: ANSI C63.10: 2020
Limits	: If the tested output power based on peak test: At least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. If the tested output power based on RMS averaging over a time interval: At least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-12-11 to 2025-12-30
Input voltage	: 3.86Vdc, 2150mAh supplied by a rechargeable Lithium Ion Battery, 5Vdc/9Vdc 3A supplied by USB type C port
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.6 °C
Relative humidity	: 55 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix B.

5.1.7 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(d) & FCC Part 15.205 RSS-247 Clause 6.6
Basic standard	: ANSI C63.10: 2020
Limits	: Refer to 15.209(a) of FCC part 15.247(d) RSS-Gen Table 5
Kind of test site	: 3m Semi-anechoic Chamber & 3m Full-anechoic Chamber

Test Setup

Date of testing	: 2025-12-14 to 2025-12-30
Input voltage	: 3.86Vdc, 2150mAh supplied by a rechargeable Lithium Ion Battery, 5Vdc/9Vdc 3A supplied by USB type C port
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst-case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix B.

5.1.8 AC Conducted Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.207(a) RSS-GEN clause 8.8
Basic standard	: ANSI C63.10: 2020
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-01-06
Input voltage	: 120V AC/60Hz Via PC
Operation mode	: B
Earthing	: Not connected
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B .
All modes tested, only the worst-case reported.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Technical Specification of EUT	8
Table 3: Test environments	10
Table 4: Test channel and frequency.....	10
Table 5: Auxiliary Equipment Used during Test	10
Table 6: Test Result of Maximum Output Power, Wi-Fi 802.11 b/g/n/ax	13

Appendix B: Test Results of Wi-Fi 802.11 b/g/n/ax

APPENDIX B: TEST RESULTS OF WI-FI 802.11 B/G/N/AX	1
APPENDIX B.1: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY	2
APPENDIX B.2: TEST RESULTS OF 6DB BANDWIDTH.....	16
APPENDIX B.3: TEST RESULTS OF 99% BANDWIDTH	30
APPENDIX B.4: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH.....	44
APPENDIX B.5: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	96
30MHz - 1GHz	96
Above 1GHz	98
APPENDIX B.6: TEST RESULTS OF CONDUCTED EMISSIONS OF AC MAINS	124

Appendix B.1: Test Results of Conducted Power Spectral Density

TestMode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-15.34	≤8.00	PASS
		2437	-15.22	≤8.00	PASS
		2462	-15.79	≤8.00	PASS
11G	Ant1	2412	-13.35	≤8.00	PASS
		2437	-13.70	≤8.00	PASS
		2462	-14.30	≤8.00	PASS
11N20SISO	Ant1	2412	-16.60	≤8.00	PASS
		2437	-16.43	≤8.00	PASS
		2462	-18.00	≤8.00	PASS
11N40SISO	Ant1	2422	-20.10	≤8.00	PASS
		2437	-18.44	≤8.00	PASS
		2452	-23.21	≤8.00	PASS

TestMode	Antenna	Freq(MHz)	RuSize	RuIndex	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11AX20SISO	Ant1	2412	26Tone	RU0	-13.68	≤8.00	PASS
			52Tone	RU37	-13.88	≤8.00	PASS
			106Tone	RU53	-13.67	≤8.00	PASS
			242Tone	RU61	-12.57	≤8.00	PASS
		2437	26Tone	RU4	-13.77	≤8.00	PASS
			52Tone	RU38	-13.36	≤8.00	PASS
			106Tone	RU53	-13.69	≤8.00	PASS
			242Tone	RU61	-11.46	≤8.00	PASS
		2462	26Tone	RU8	-15.01	≤8.00	PASS
			52Tone	RU40	-15.46	≤8.00	PASS
			106Tone	RU54	-12.34	≤8.00	PASS
			242Tone	RU61	-12.75	≤8.00	PASS
11AX40SISO	Ant1	2422	26Tone	RU0	-17.78	≤8.00	PASS
			52Tone	RU37	-14.26	≤8.00	PASS
			106Tone	RU53	-12.01	≤8.00	PASS
			242Tone	RU61	-11.68	≤8.00	PASS
		2437	484Tone	RU65	-14.73	≤8.00	PASS
			26Tone	RU8	-16.01	≤8.00	PASS
			52Tone	RU40	-14.52	≤8.00	PASS
			106Tone	RU54	-10.94	≤8.00	PASS
		2452	242Tone	RU61	-11.42	≤8.00	PASS
			484Tone	RU65	-12.06	≤8.00	PASS
			26Tone	RU17	-17.36	≤8.00	PASS
			52Tone	RU44	-14.51	≤8.00	PASS
			106Tone	RU56	-9.60	≤8.00	PASS
			242Tone	RU62	-11.31	≤8.00	PASS
			484Tone	RU65	-15.41	≤8.00	PASS

11B_Ant1_2412




11B_Ant1_2437




11B_Ant1_2462




11G_Ant1_2412

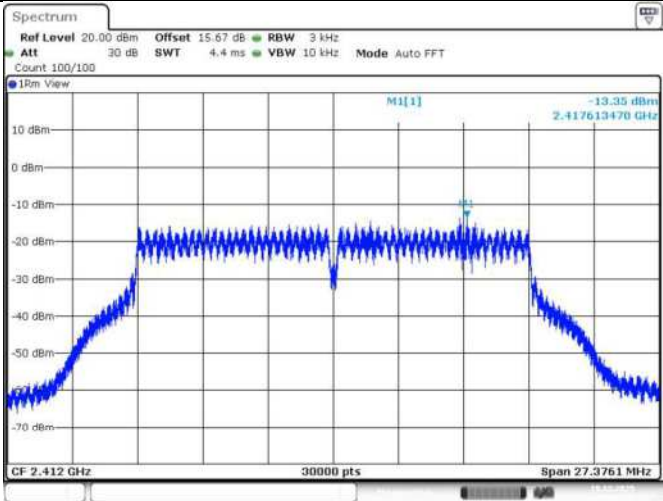


11G_Ant1_2437

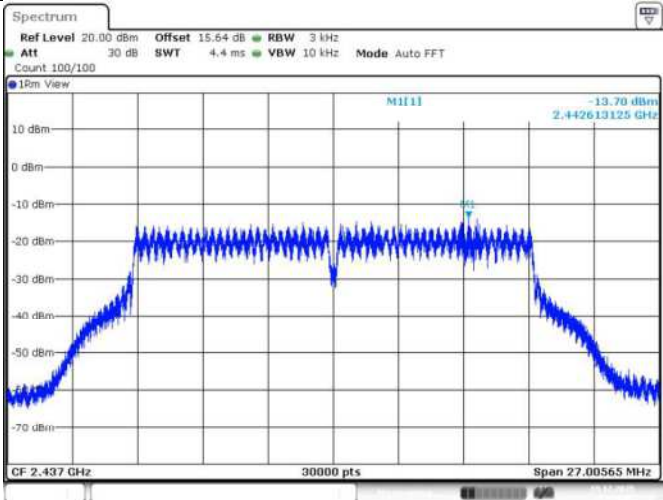

11G_Ant1_2462

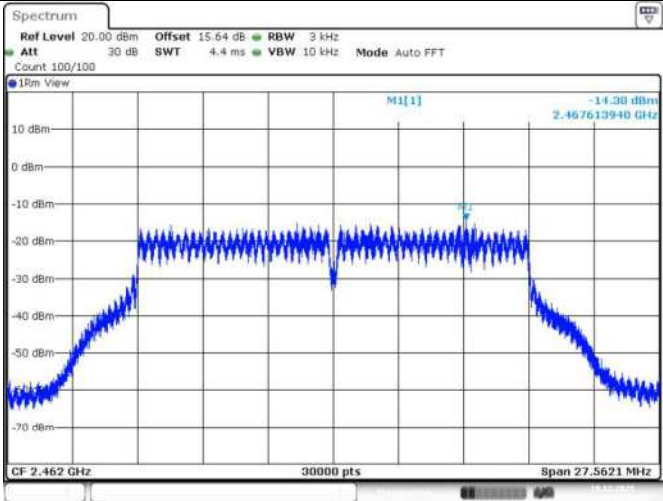


11N20SISO_Ant1_2412

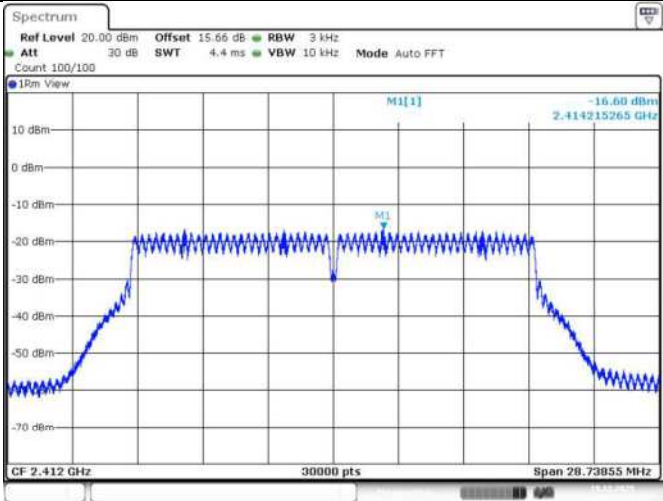


Date: 19.DEC.2025 15:11:19

11N20SISO_Ant1_2437

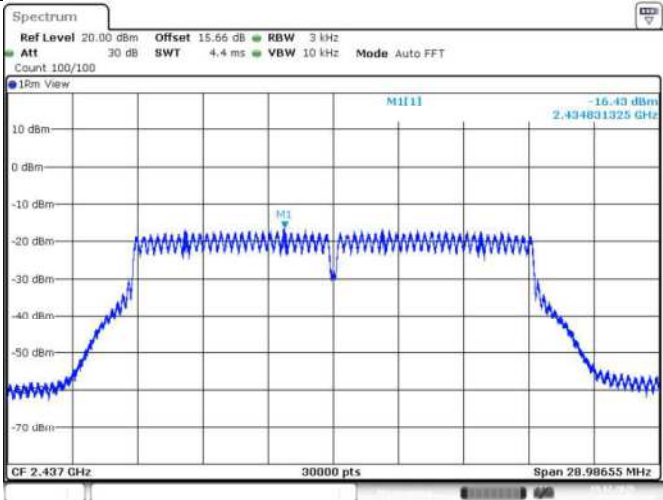


Date: 19.DEC.2025 15:13:27

11N20SISO_Ant1_2462

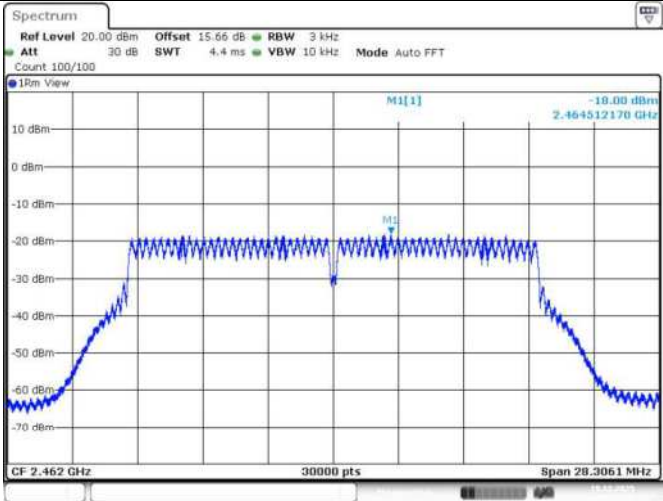


Date: 19.DEC.2025 15:15:34


11N40SISO_Ant1_2422

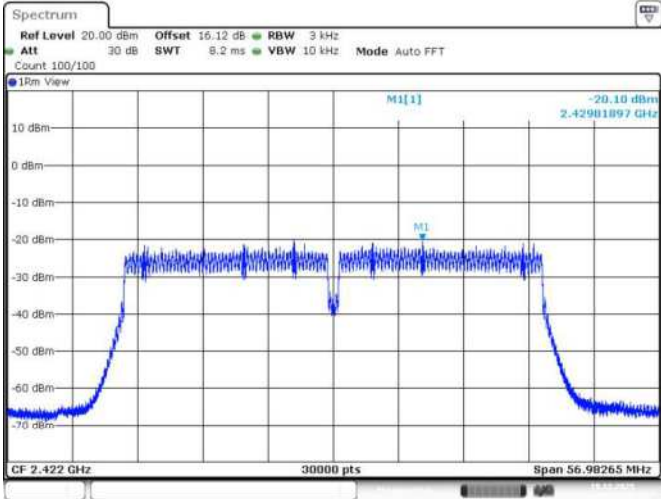


11N40SISO_Ant1_2437

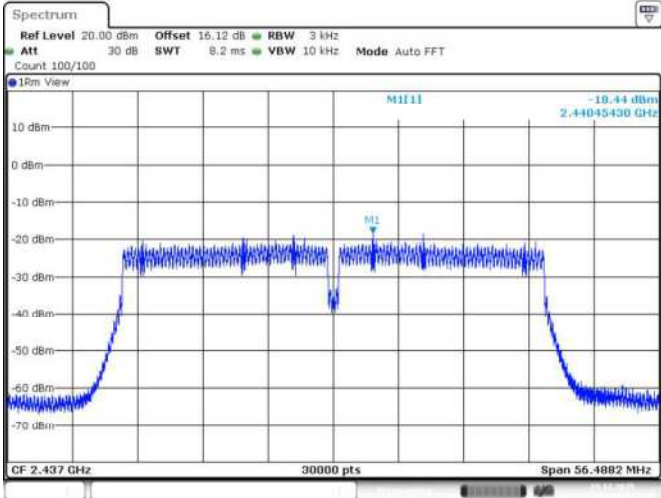

11N40SISO_Ant1_2452

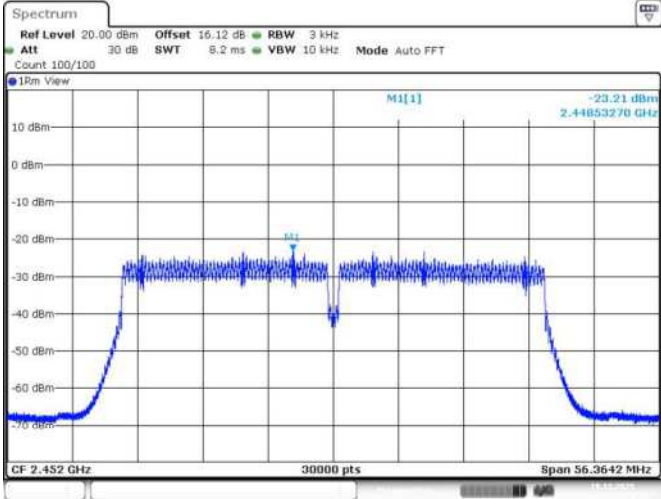


11AX20SISO_Ant1_2412_26Tone_RU0

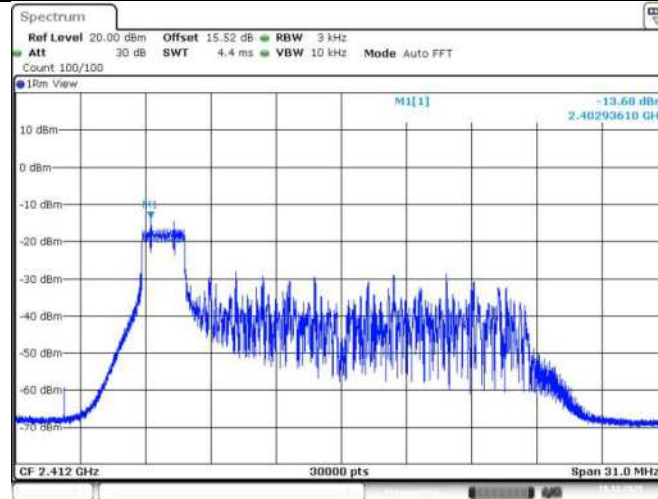


Date: 19.DEC.2025 16:12:46

11AX20SISO_Ant1_2412_52Tone_RU37

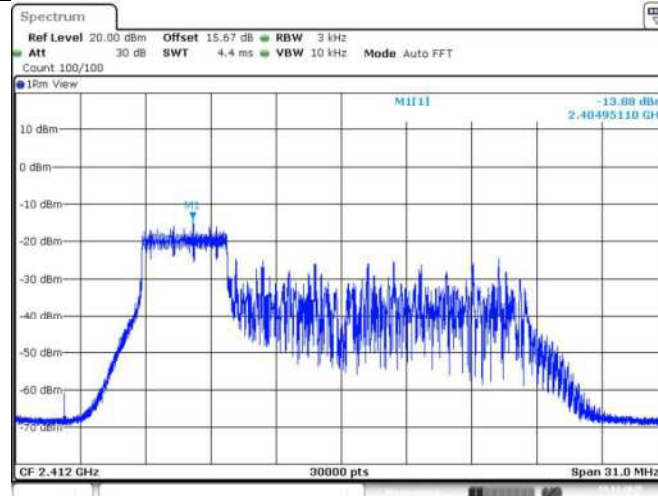


Date: 19.DEC.2025 16:13:32

11AX20SISO_Ant1_2412_106Tone_RU53

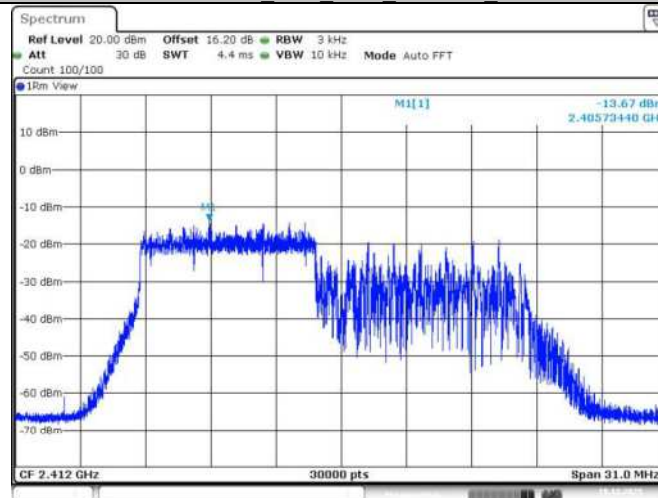


Date: 19.DEC.2025 16:14:03

11AX20SISO_Ant1_2412_242Tone_RU61

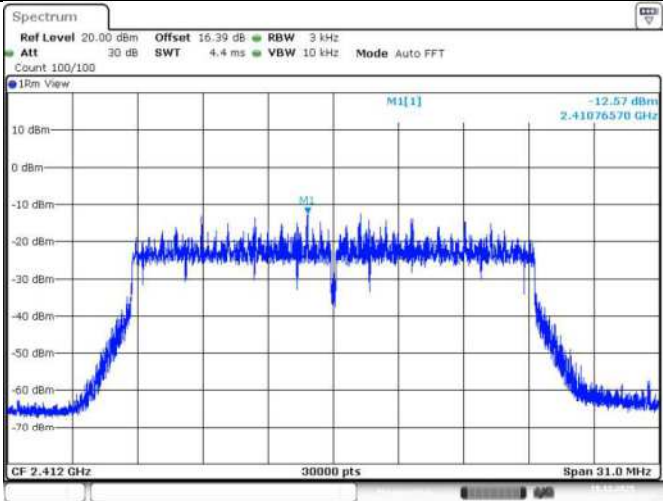


Date: 19.DEC.2025 16:14:56

11AX20SISO_Ant1_2437_26Tone_RU4

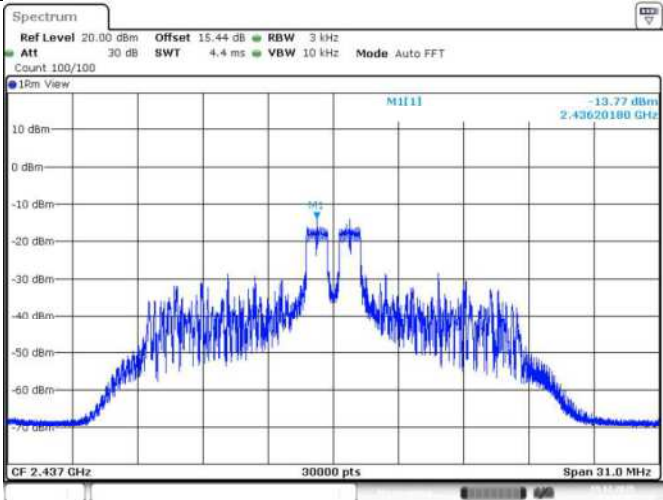


Date: 19.DEC.2025 16:17:42

11AX20SISO_Ant1_2437_52Tone_RU38

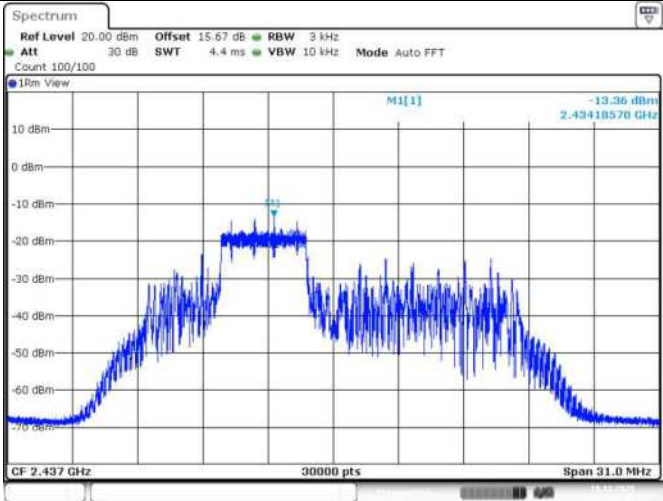


Date: 19.DEC.2025 16:18:39

11AX20SISO_Ant1_2437_106Tone_RU53

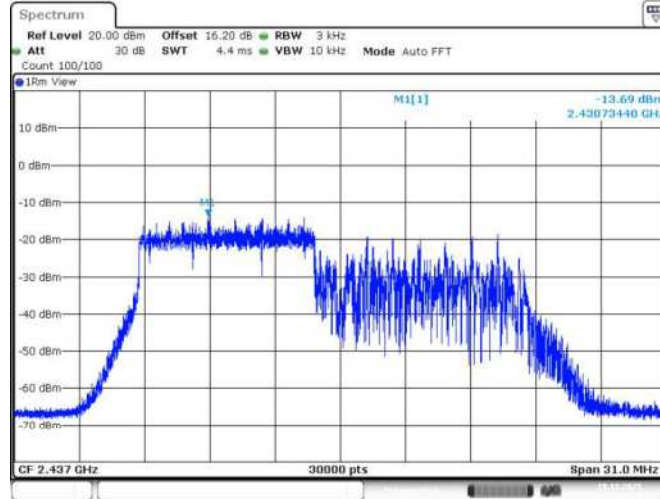


Date: 19.DEC.2025 16:19:15

11AX20SISO_Ant1_2437_242Tone_RU61

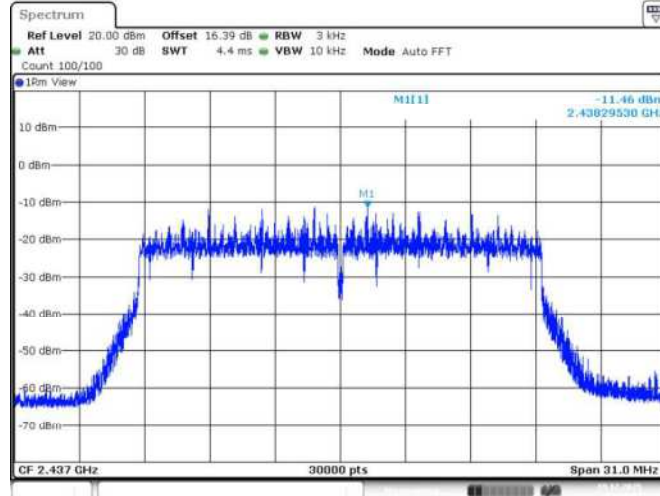


Date: 19.DEC.2025 16:20:15

11AX20SISO_Ant1_2462_26Tone_RU8

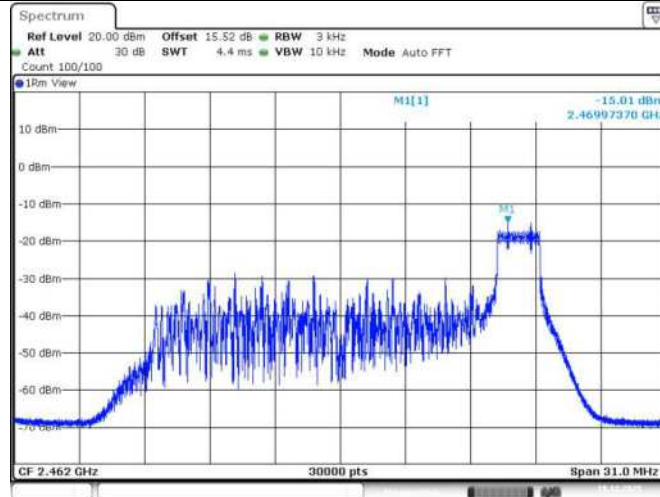


Date: 19.DEC.2025 16:22:12


11AX20SISO_Ant1_2462_52Tone_RU40

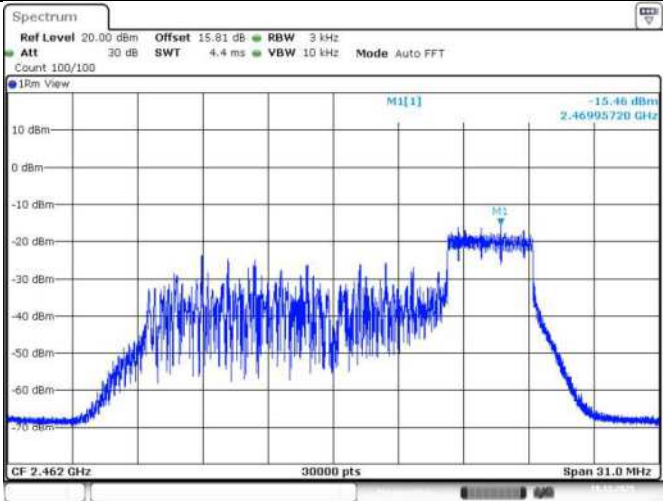


11AX20SISO_Ant1_2462_106Tone_RU54

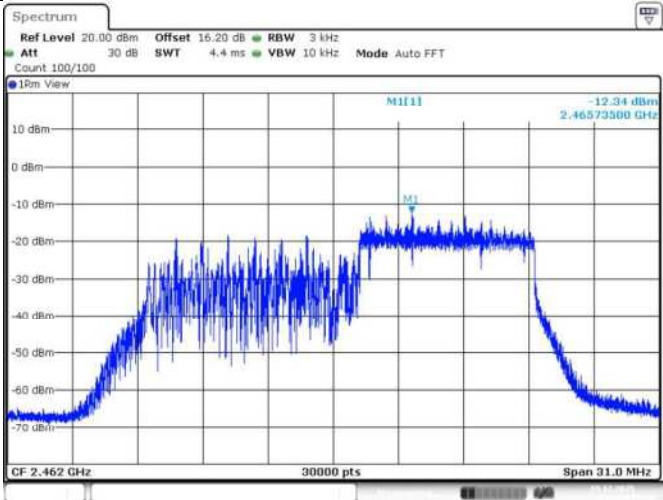


11AX20SISO_Ant1_2462_242Tone_RU61

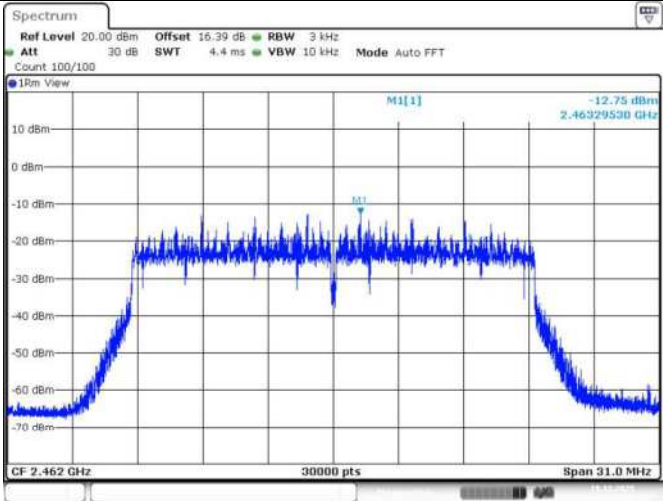

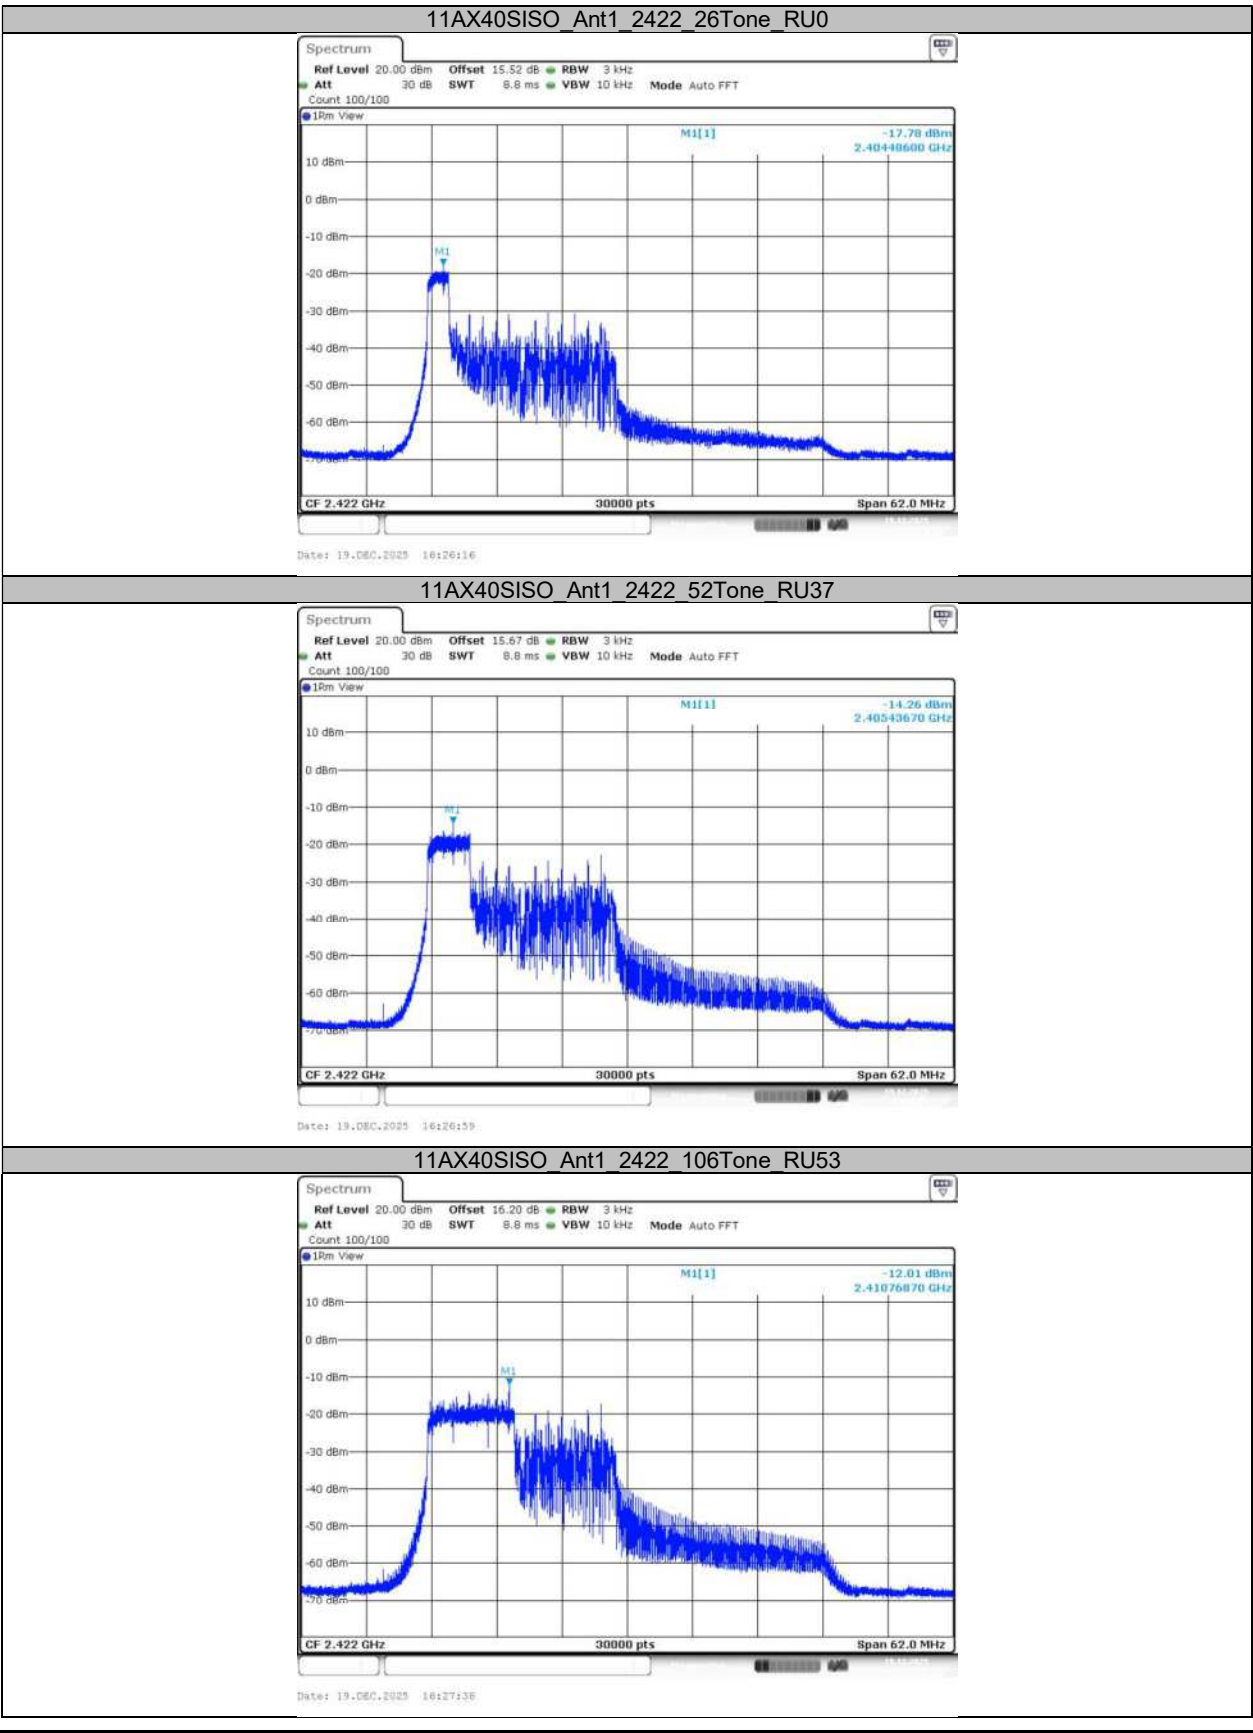


11AX40SISO_Ant1_2422_242Tone_RU61

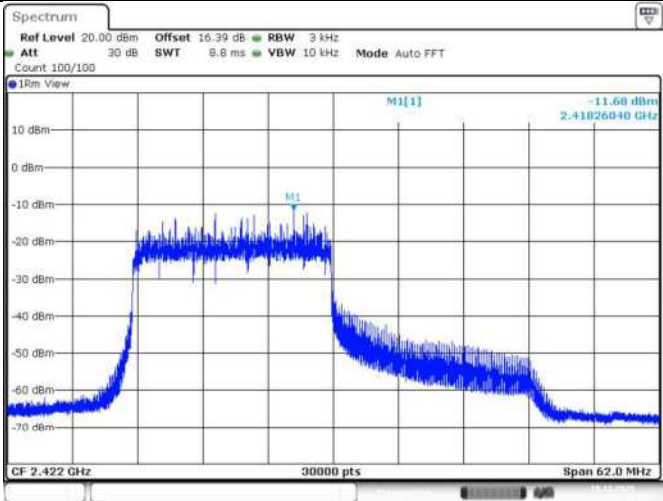


Date: 19.DEC.2025 16:28:36

11AX40SISO_Ant1_2422_484Tone_RU65

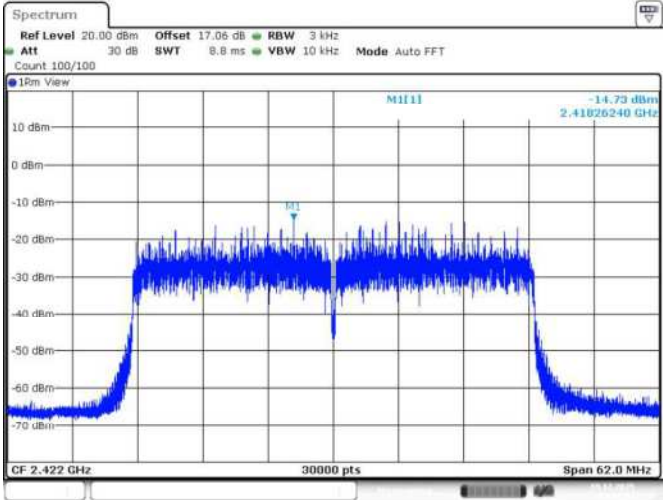


Date: 19.DEC.2025 16:31:01

11AX40SISO_Ant1_2437_26Tone_RU8

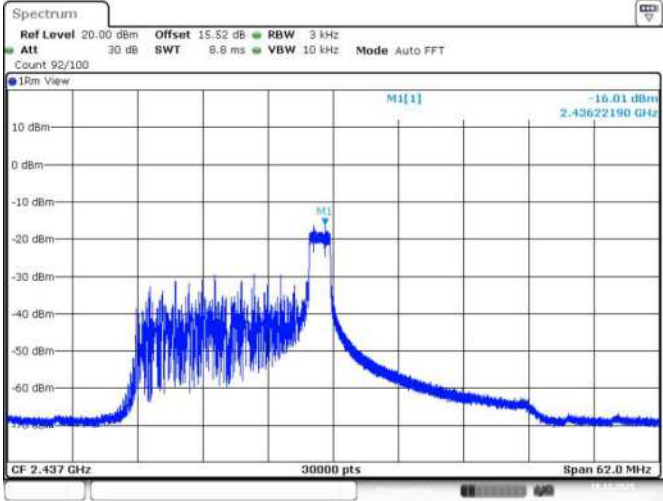


Date: 19.DEC.2025 16:33:00


11AX40SISO_Ant1_2437_52Tone_RU40

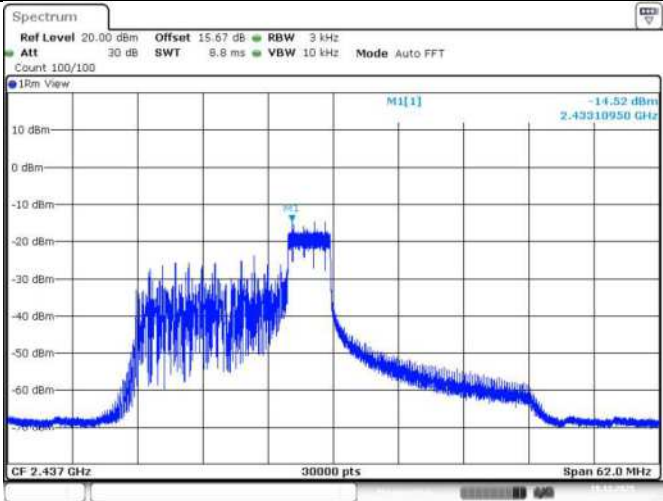


11AX40SISO_Ant1_2437_106Tone_RU54

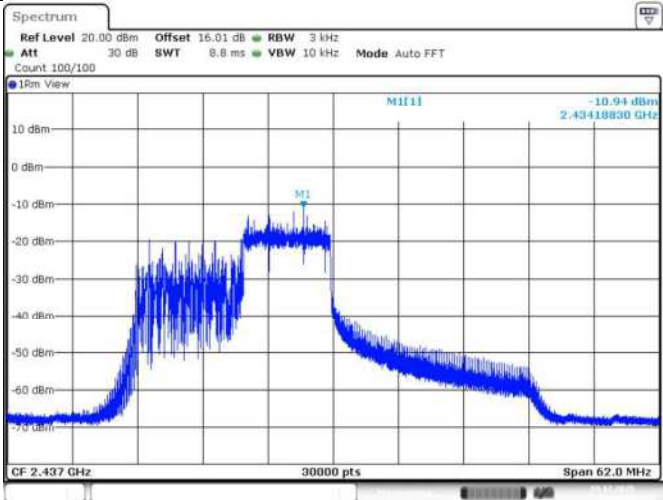

11AX40SISO_Ant1_2437_242Tone_RU61

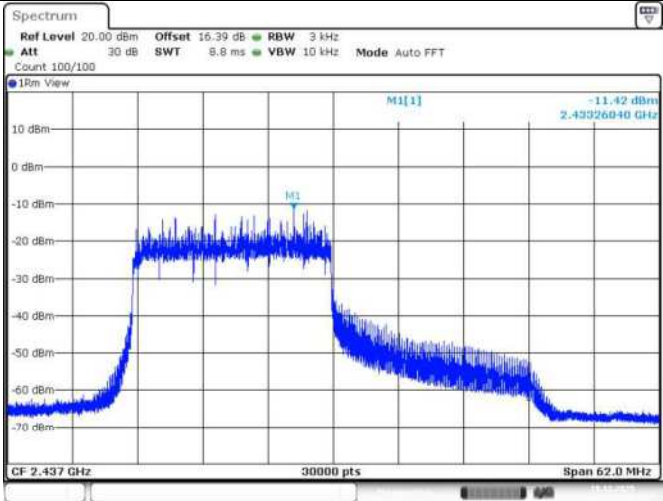


11AX40SISO Ant1_2437_484Tone_RU65

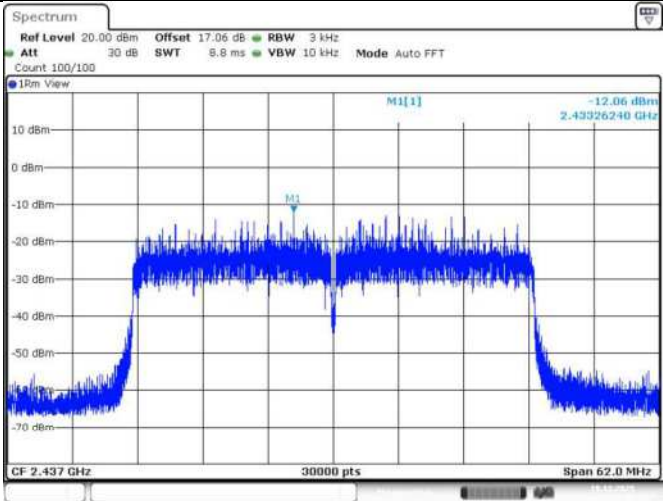


Date: 19.DEC.2025 16:38:35

11AX40SISO Ant1_2452_26Tone_RU17

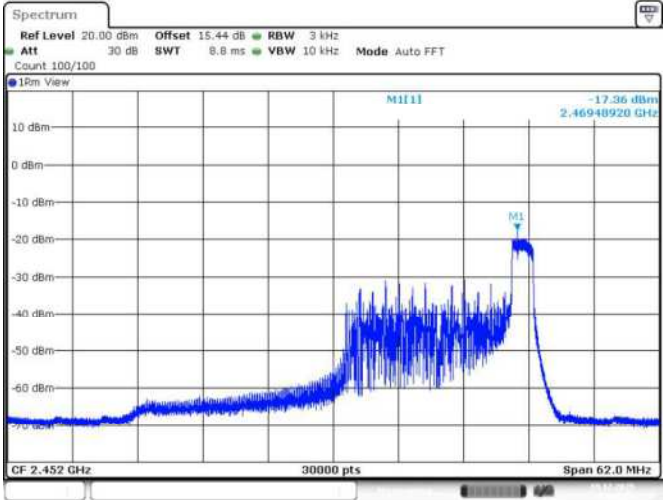


Date: 19.DEC.2025 16:40:32

11AX40SISO Ant1_2452_52Tone_RU44

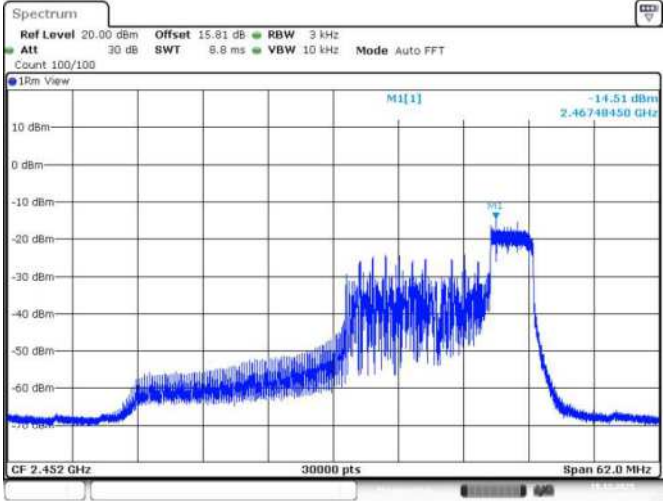


Date: 19.DEC.2025 16:41:57


11AX40SISO_Ant1_2452_106Tone_RU56

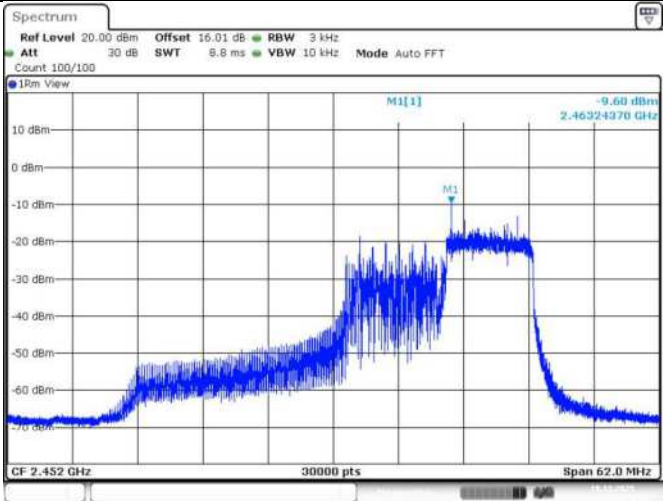

11AX40SISO_Ant1_2452_242Tone_RU62

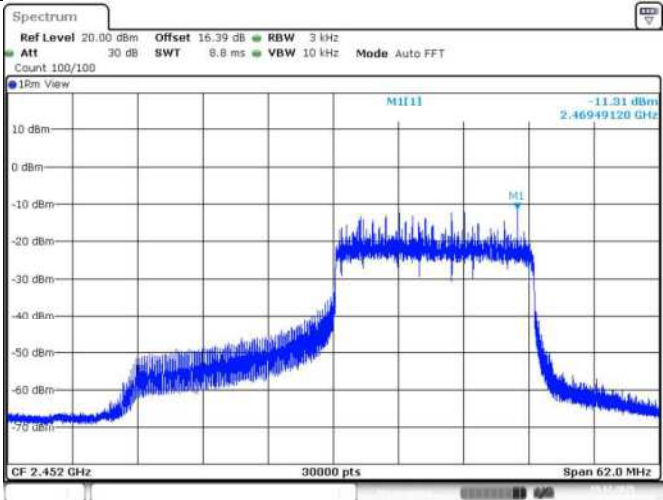

11AX40SISO_Ant1_2452_484Tone_RU65

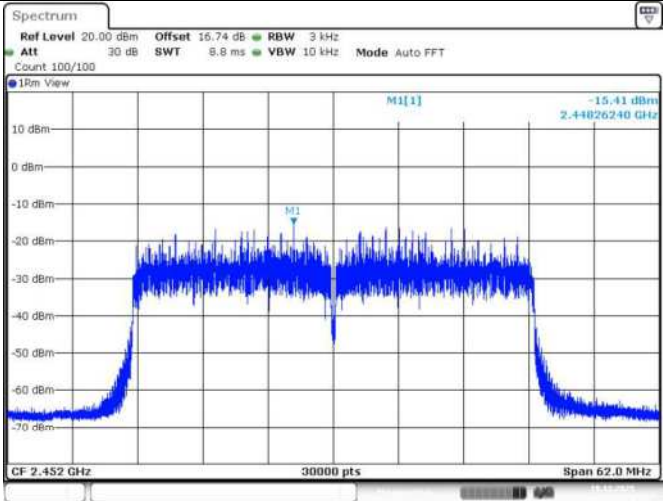


Appendix B.2: Test Results of 6dB Bandwidth

DTS Bandwidth Test Result

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.08	2407.96	2416.04	0.5	PASS
		2437	9.04	2432.48	2441.52	0.5	PASS
		2462	8.56	2457.48	2466.04	0.5	PASS
11G	Ant1	2412	16.32	2403.84	2420.16	0.5	PASS
		2437	16.32	2428.84	2445.16	0.5	PASS
		2462	16.56	2453.72	2470.28	0.5	PASS
11N20SISO	Ant1	2412	17.60	2403.20	2420.80	0.5	PASS
		2437	17.60	2428.20	2445.80	0.5	PASS
		2462	17.60	2453.20	2470.80	0.5	PASS
11N40SISO	Ant1	2422	36.32	2403.84	2440.16	0.5	PASS
		2437	36.32	2418.84	2455.16	0.5	PASS
		2452	36.32	2433.84	2470.16	0.5	PASS


Test Mode	Antenna	Freq(MHz)	Ru Size	Ru Index	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11AX20SISO	Ant1	2412	26Tone	RU0	2.12	2402.44	2404.56	0.5	PASS
			52Tone	RU37	17.00	2402.52	2419.52	0.5	PASS
			106Tone	RU53	17.16	2402.40	2419.56	0.5	PASS
			242Tone	RU61	18.96	2402.52	2421.48	0.5	PASS
		2437	26Tone	RU4	2.64	2435.68	2438.32	0.5	PASS
			52Tone	RU38	15.08	2429.48	2444.56	0.5	PASS
			106Tone	RU53	17.16	2427.40	2444.56	0.5	PASS
			242Tone	RU61	18.96	2427.56	2446.52	0.5	PASS
		2462	26Tone	RU8	2.08	2469.44	2471.52	0.5	PASS
			52Tone	RU40	17.08	2454.44	2471.52	0.5	PASS
			106Tone	RU54	17.16	2454.44	2471.60	0.5	PASS
			242Tone	RU61	18.92	2452.52	2471.44	0.5	PASS
11AX40SISO	Ant1	2422	26Tone	RU0	2.00	2403.04	2405.04	0.5	PASS
			52Tone	RU37	16.48	2403.04	2419.52	0.5	PASS
			106Tone	RU53	17.60	2402.96	2420.56	0.5	PASS
			242Tone	RU61	18.64	2403.12	2421.76	0.5	PASS
			484Tone	RU65	37.20	2403.68	2440.88	0.5	PASS
		2437	26Tone	RU8	2.08	2434.68	2436.76	0.5	PASS
			52Tone	RU40	17.28	2419.48	2436.76	0.5	PASS
			106Tone	RU54	17.28	2419.40	2436.68	0.5	PASS
			242Tone	RU61	18.40	2418.20	2436.60	0.5	PASS
			484Tone	RU65	36.72	2418.84	2455.56	0.5	PASS
		2452	26Tone	RU17	2.00	2468.96	2470.96	0.5	PASS
			52Tone	RU44	16.48	2454.48	2470.96	0.5	PASS
			106Tone	RU56	17.68	2453.20	2470.88	0.5	PASS
			242Tone	RU62	18.16	2452.40	2470.56	0.5	PASS
			484Tone	RU65	37.36	2433.20	2470.56	0.5	PASS

11B_Ant1_2412

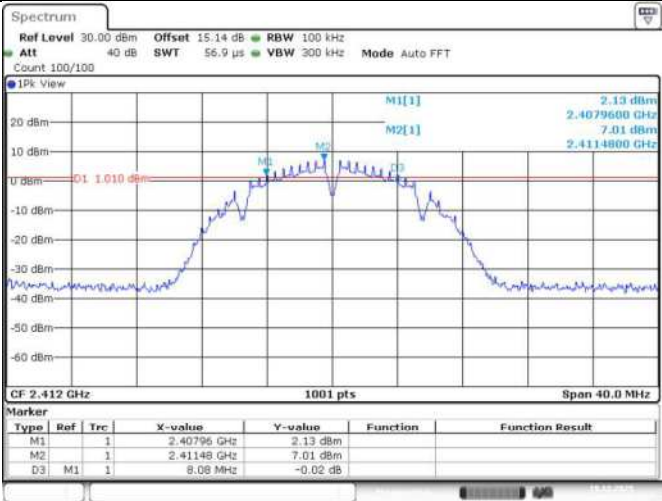

Date: 19.DEC.2025 15:33:32

11B_Ant1_2437

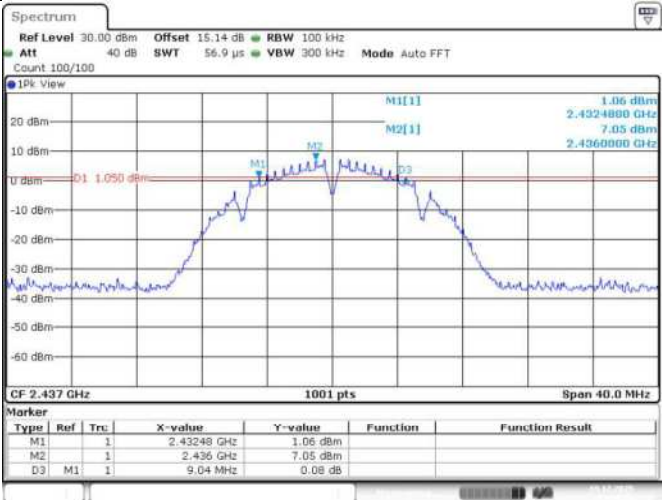


Date: 19.DEC.2025 15:37:57

11B_Ant1_2462




Date: 19.DEC.2025 15:39:56

11G_Ant1_2412

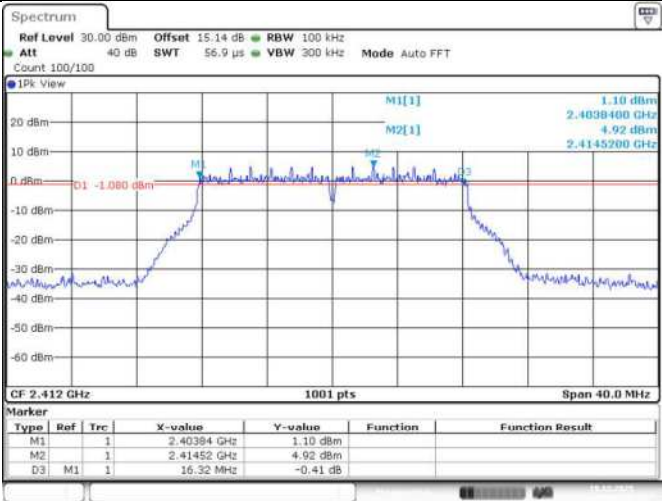


Date: 19.DEC.2025 15:42:20

11G_Ant1_2437

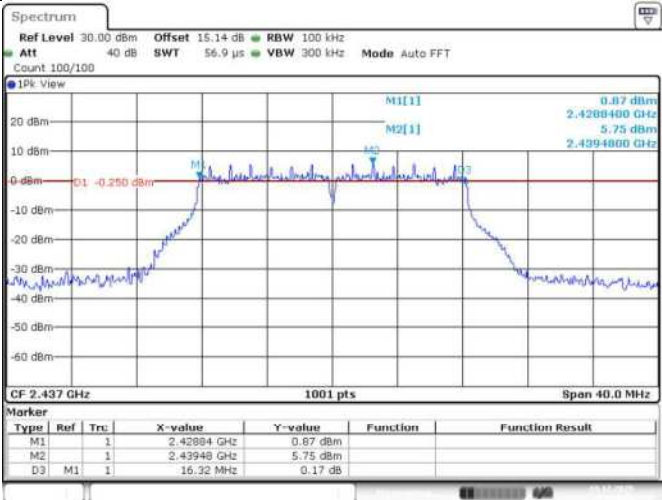


Date: 19.DEC.2025 15:44:21

11G_Ant1_2462

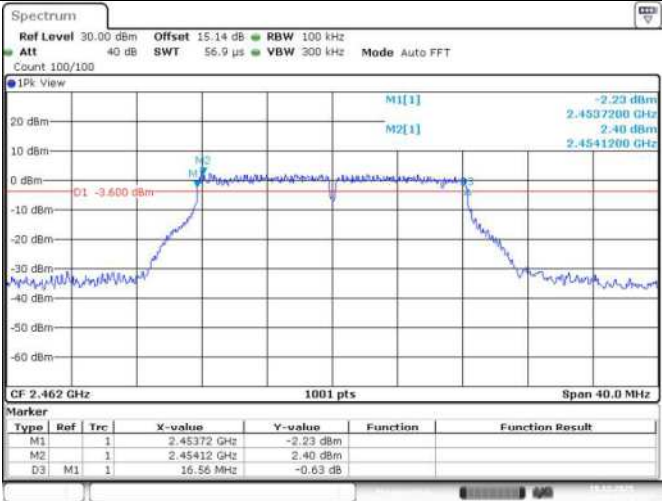


Date: 19.DEC.2025 15:46:16

11N20SISO_Ant1_2412

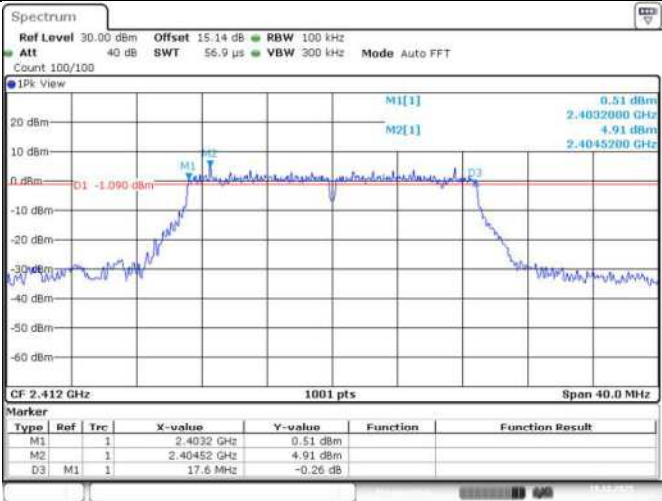

Date: 19.DEC.2025 15:10:53

11N20SISO_Ant1_2437

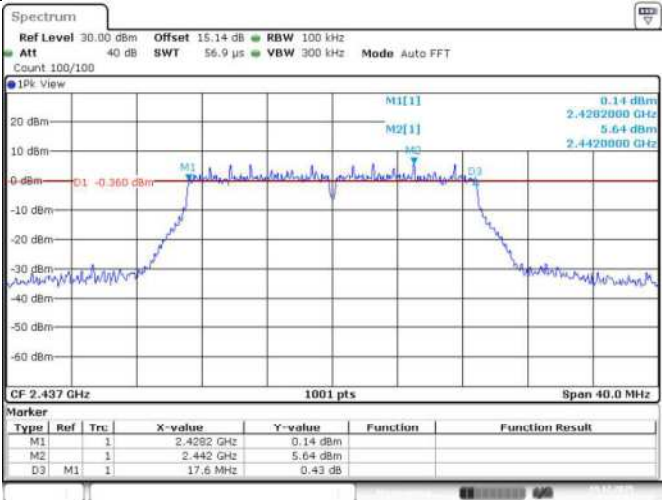


Date: 19.DEC.2025 15:13:01

11N20SISO_Ant1_2462




Date: 19.DEC.2025 15:15:07

11N40SISO_Ant1_2422

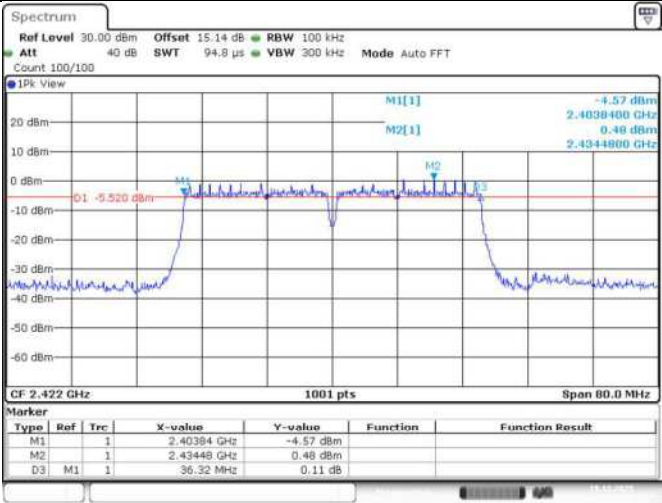


Date: 19.DEC.2025 16:55:23

11N40SISO_Ant1_2437

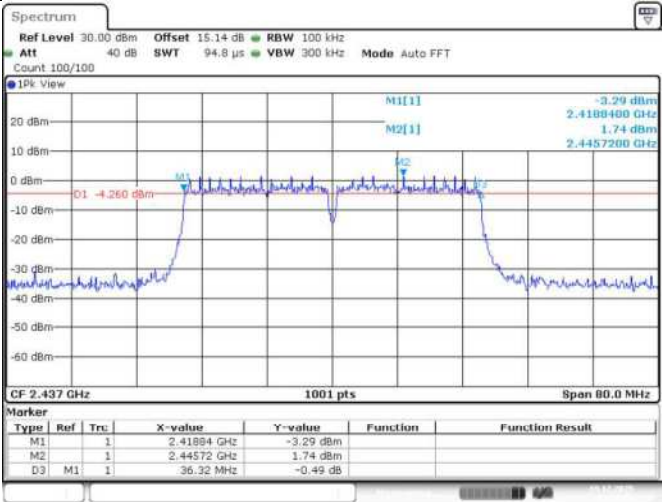


Date: 19.DEC.2025 16:55:57

11N40SISO_Ant1_2452

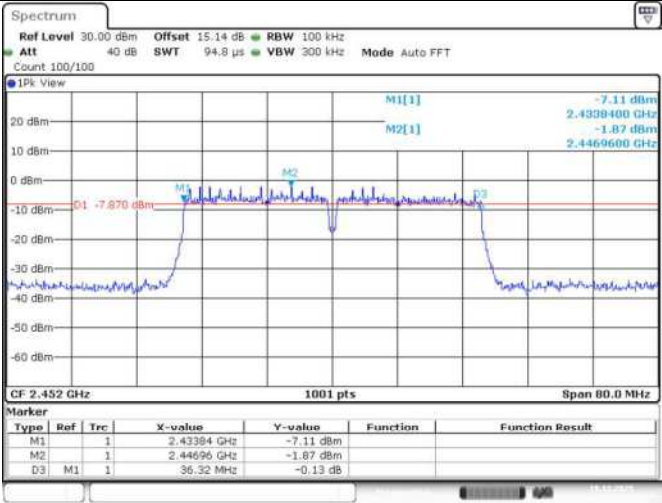


Date: 19.DEC.2025 16:56:23

11AX20SISO_Ant1_2412_26Tone_RU0

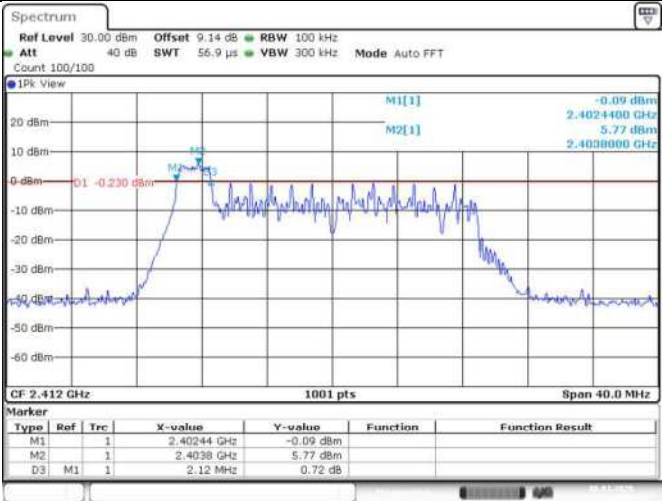


Date: 6-JAN-2026 13:50:00

11AX20SISO_Ant1_2412_52Tone_RU37

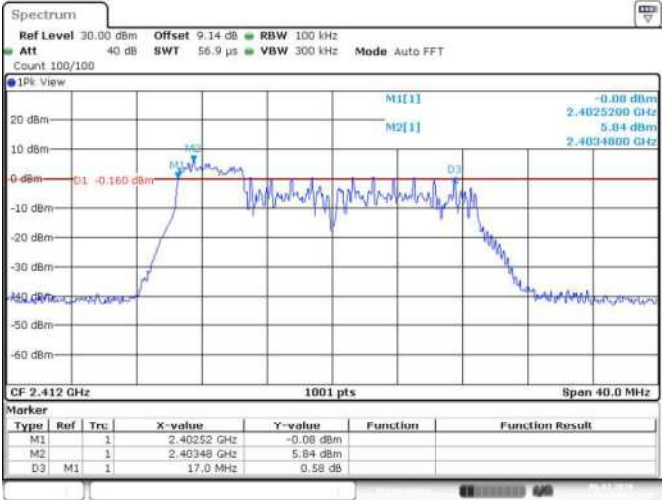

Date: 6-JAN-2026 13:57:28

11AX20SISO_Ant1_2412_106Tone_RU53

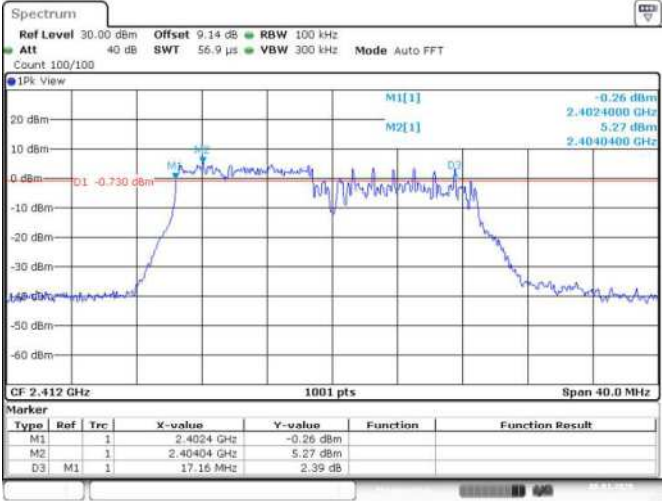


Date: 6-JAN-2026 13:59:28

11AX20SISO Ant1_2412_242Tone_RU61




Date: 19.DEC.2025 16:14:26

11AX20SISO Ant1_2437_26Tone_RU4

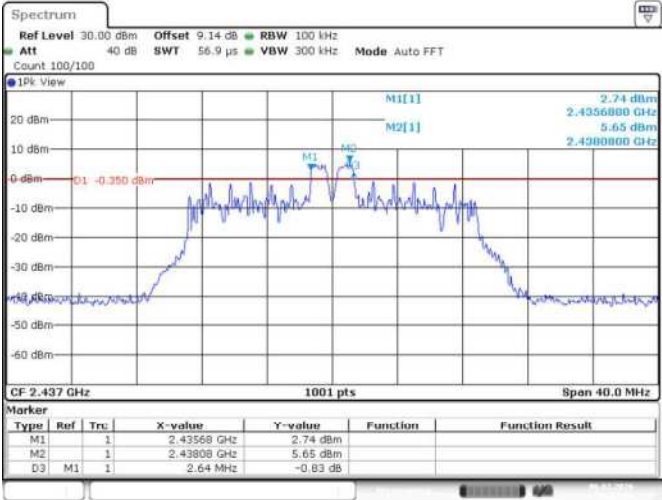


Date: 6.JAN.2026 19:02:18

11AX20SISO Ant1_2437_52Tone_RU38

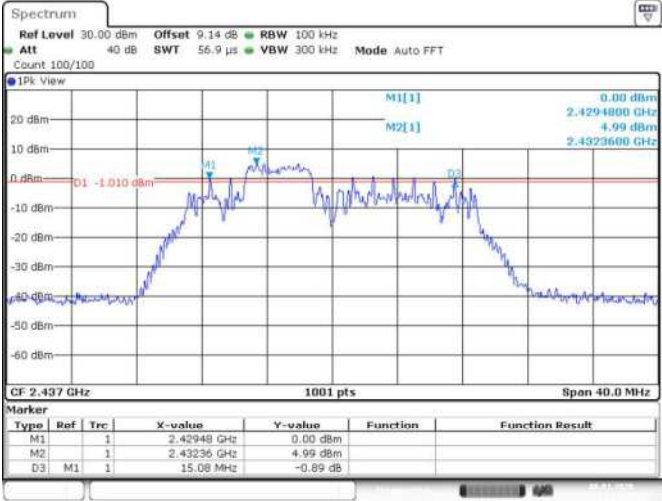

Date: 6.JAN.2026 19:04:45

11AX20SISO Ant1_2437_106Tone_RU53

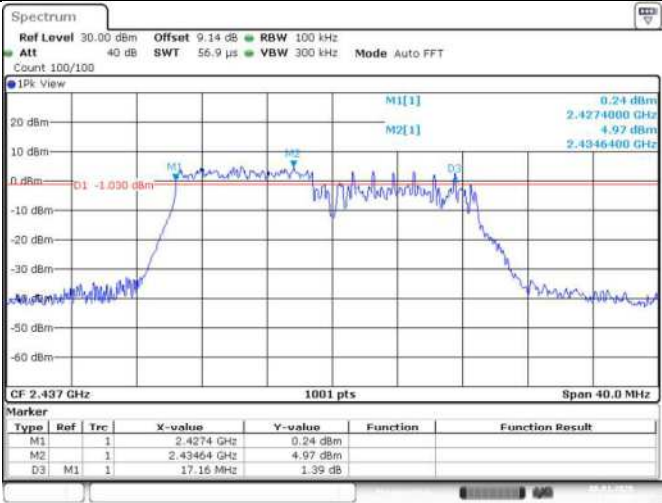


Date: 6.JAN.2026 14:09:05

11AX20SISO Ant1_2437_242Tone_RU61




Date: 19.DEC.2025 16:19:42

11AX20SISO Ant1_2462_26Tone_RU8

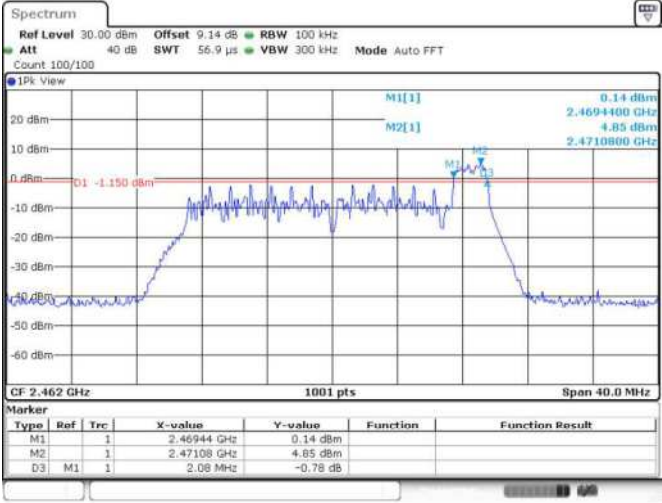


Date: 6.JAN.2026 15:24:21

11AX20SISO_Ant1_2462_52Tone_RU40

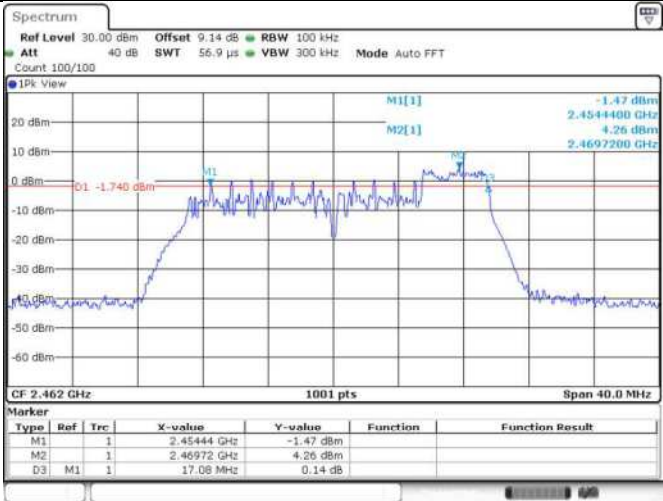


Date: 6.JAN.2026 15:26:08

11AX20SISO_Ant1_2462_106Tone_RU54

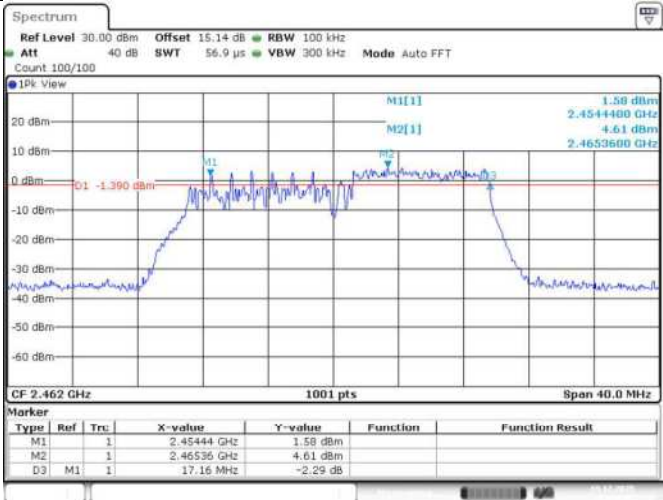


Date: 19.DEC.2025 16:23:06

11AX20SISO_Ant1_2462_242Tone_RU61

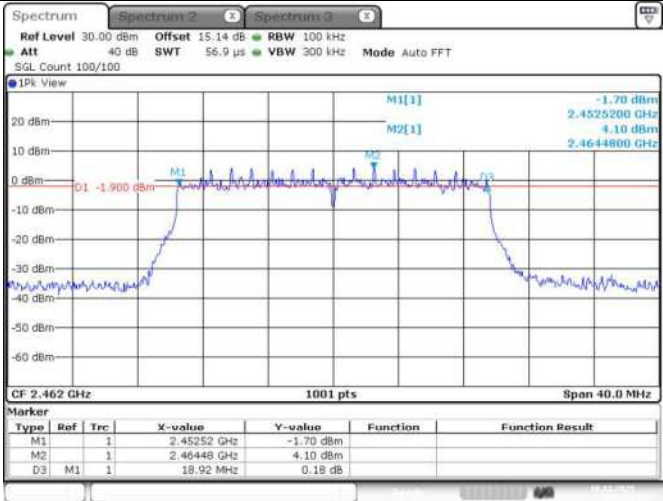


Date: 10.DEC.2025 16:05:34

11AX40SISO_Ant1_2422_26Tone_RU0

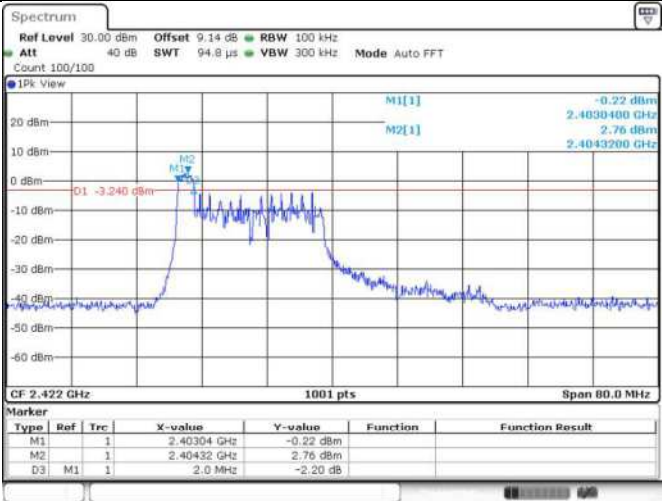


Date: 6-JAN-2026 15:28:13

11AX40SISO_Ant1_2422_52Tone_RU37

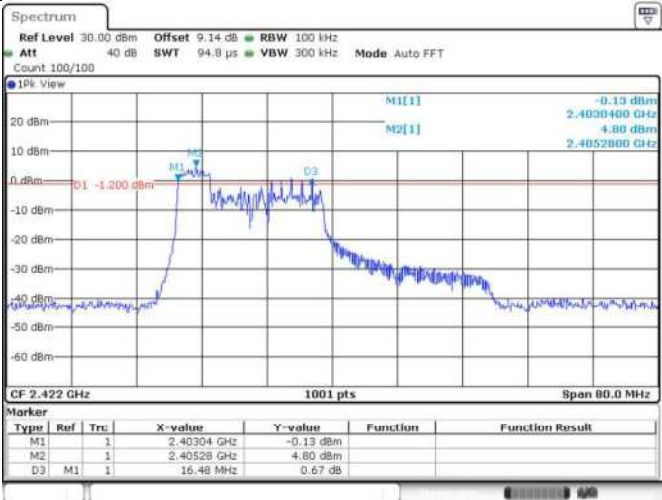


Date: 6-JAN-2026 15:30:29

11AX40SISO_Ant1_2422_106Tone_RU53

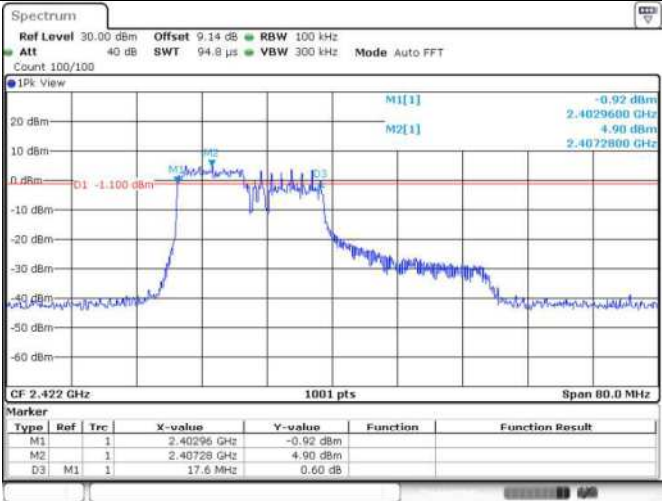


Date: 6-JAN-2026 15:32:42

11AX40SISO Ant1_2422_242Tone_RU61

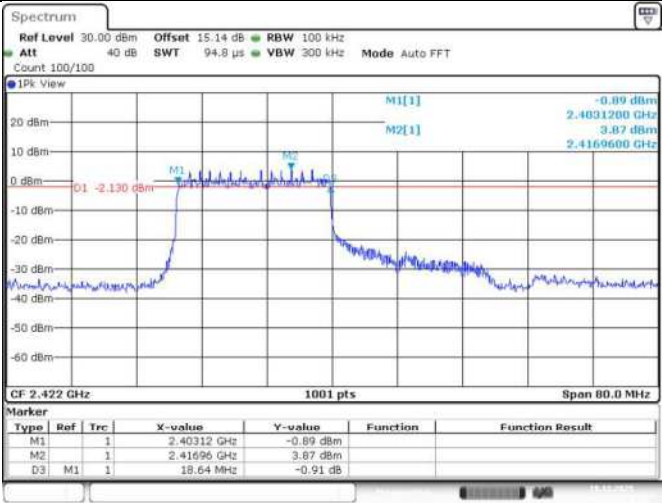


Date: 19.DEC.2025 16:57:11

11AX40SISO Ant1_2422_484Tone_RU65

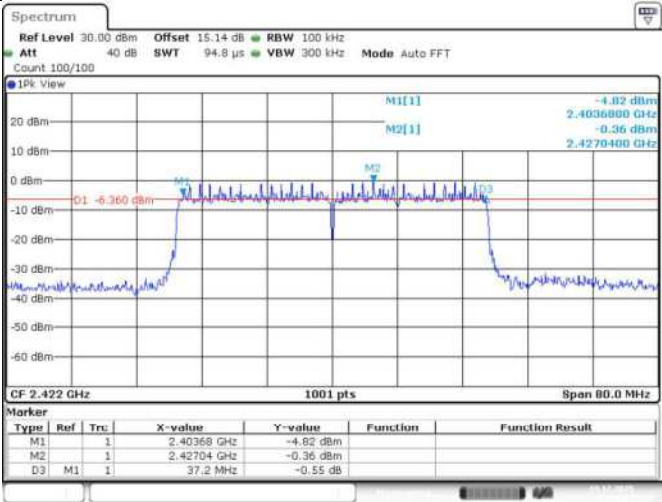


Date: 19.DEC.2025 16:30:28

11AX40SISO Ant1_2437_26Tone_RU8

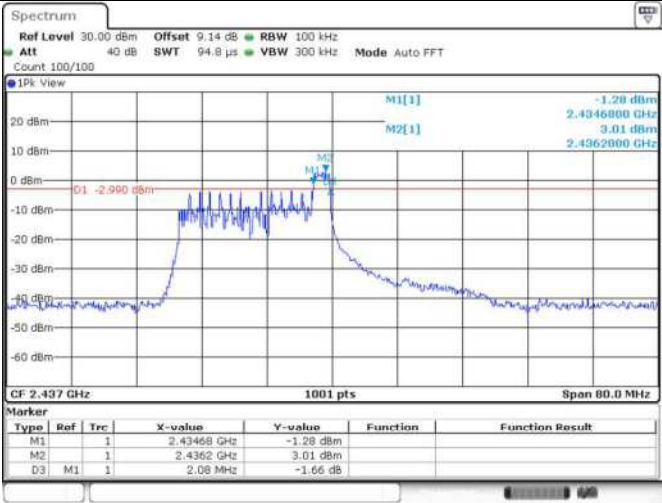


Date: 8.JAN.2026 15:35:19

11AX40SISO_Ant1_2437_52Tone_RU40

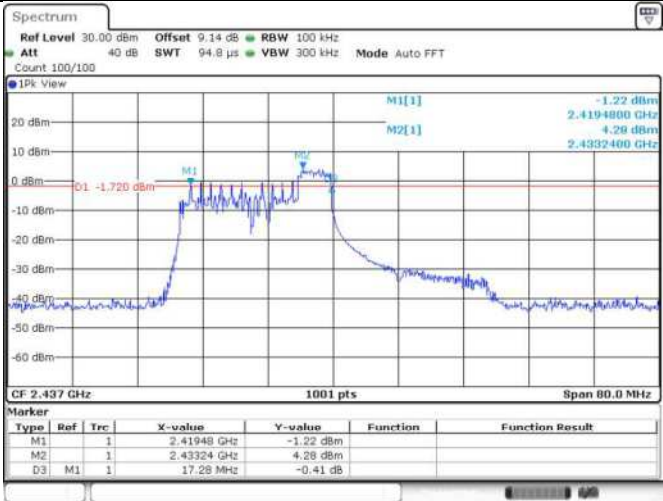


Date: 6.JAN.2026 15:37:58

11AX40SISO_Ant1_2437_106Tone_RU54

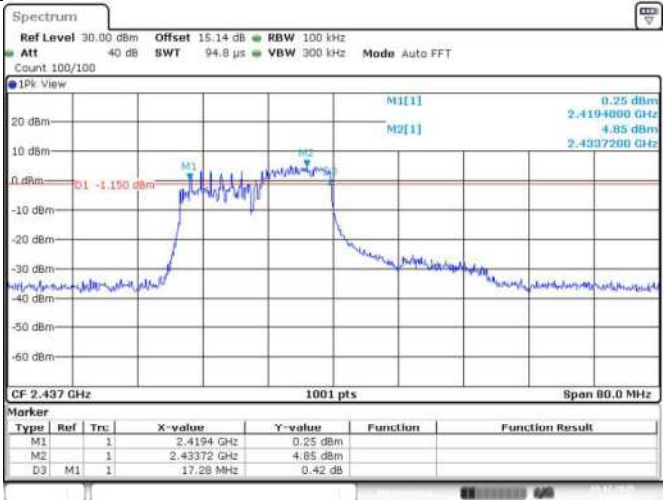


Date: 19.DEC.2025 16:37:54

11AX40SISO_Ant1_2437_242Tone_RU61

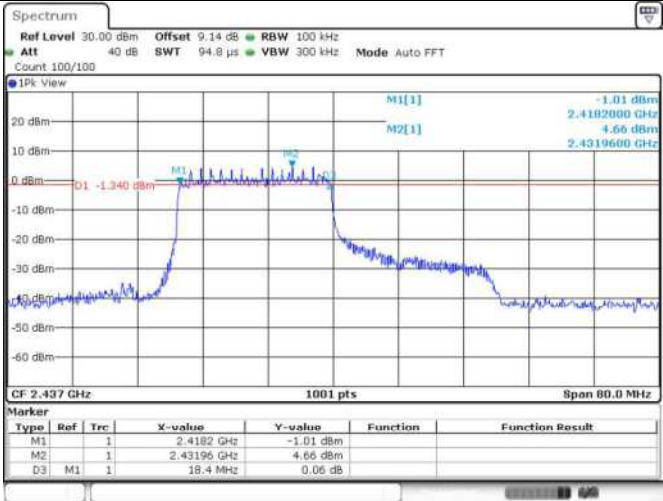


Date: 6.JAN.2026 15:39:31

11AX40SISO Ant1_2437_484Tone_RU65

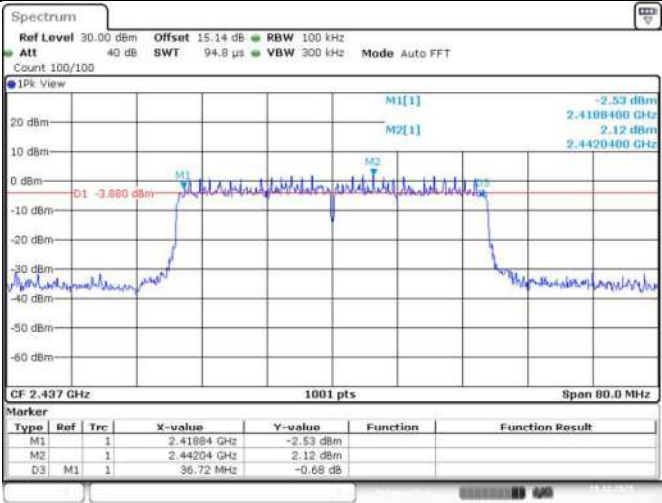


Date: 19.DEC.2025 16:38:06

11AX40SISO Ant1_2452_26Tone_RU17

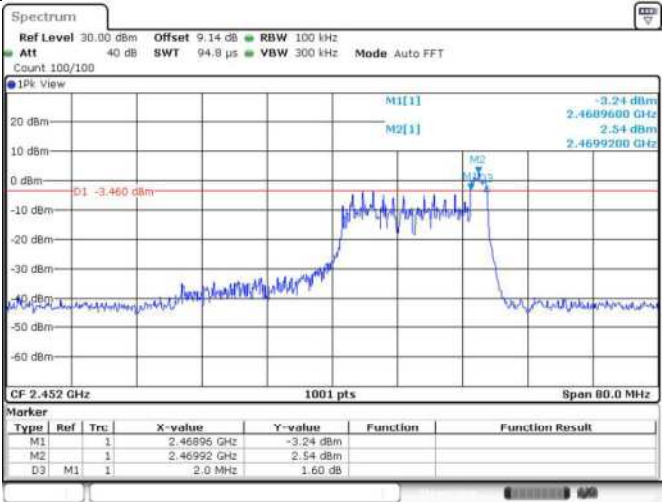

Date: 6.JAN.2026 15:41:15

11AX40SISO Ant1_2452_52Tone_RU44

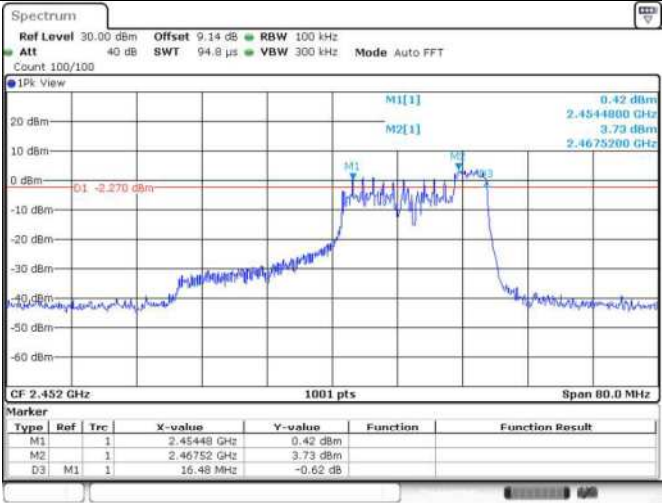


Date: 6.JAN.2026 15:42:57

11AX40SISO_Ant1_2452_106Tone_RU56




Date: 19.DEC.2025 16:44:45

11AX40SISO_Ant1_2452_242Tone_RU62

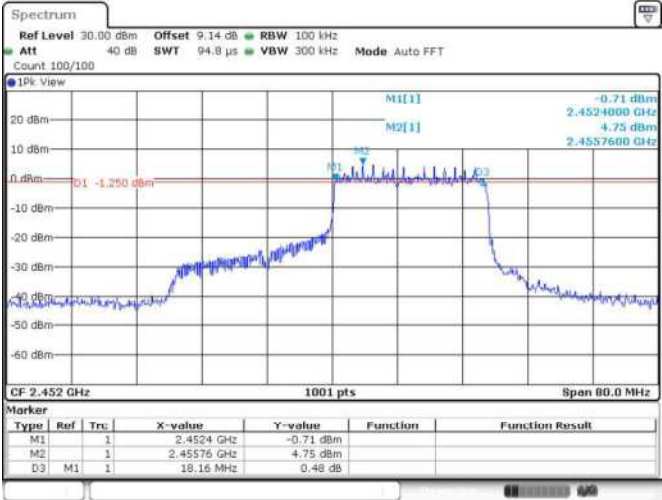

Date: 6.JAN.2026 15:44:38

11AX40SISO_Ant1_2452_484Tone_RU65

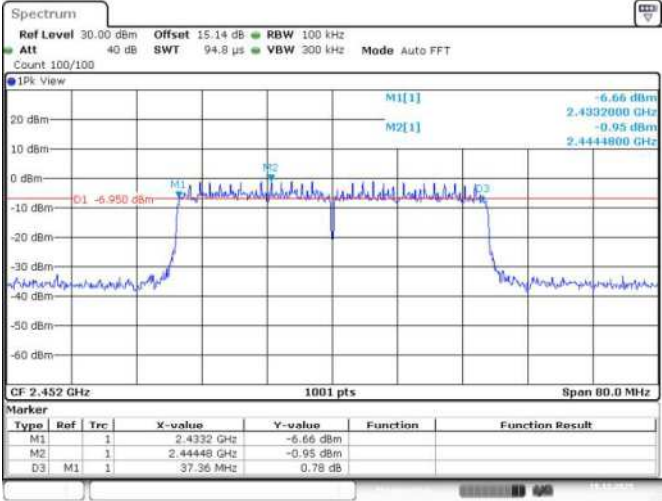

Date: 19.DEC.2025 16:51:40

Appendix B.3: Test Results of 99% Bandwidth

TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.427	2405.2867	2418.7133	---	---
		2437	13.387	2430.3267	2443.7133	---	---
		2462	13.387	2455.2867	2468.6733	---	---
11G	Ant1	2412	17.662	2402.7692	2420.4316	---	---
		2437	17.423	2428.4885	2445.9111	---	---
		2462	17.782	2453.2088	2470.9910	---	---
11N20SISO	Ant1	2412	18.541	2402.8092	2421.3506	---	---
		2437	18.701	2427.4496	2446.1508	---	---
		2462	18.262	2452.9291	2471.1908	---	---
11N40SISO	Ant1	2422	36.683	2403.6983	2440.3816	---	---
		2437	36.444	2418.7782	2455.2218	---	---
		2452	36.444	2433.7782	2470.2218	---	---


Test Mode	Antenna	Freq(MHz)	Ru Size	Ru Index	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11AX20SISO	Ant1	2412	26Tone	RU0	18.701	2401.9301	2420.6314	---	---
			52Tone	RU37	18.661	2402.2498	2420.9111	---	---
			106Tone	RU53	18.422	2402.3297	2420.7512	---	---
			242Tone	RU61	19.221	2402.4096	2421.6304	---	---
		2437	26Tone	RU4	17.862	2427.7692	2445.6314	---	---
			52Tone	RU38	17.862	2427.8092	2445.6713	---	---
			106Tone	RU53	18.501	2427.3297	2445.8312	---	---
			242Tone	RU61	19.221	2427.3696	2446.5904	---	---
		2462	26Tone	RU8	18.501	2453.3686	2471.8701	---	---
			52Tone	RU40	19.181	2452.6094	2471.7902	---	---
			106Tone	RU54	18.541	2453.1688	2471.7103	---	---
			242Tone	RU61	19.221	2452.3297	2471.5504	---	---
11AX40SISO	Ant1	2422	26Tone	RU0	18.621	2402.3397	2420.9610	---	---
			52Tone	RU37	21.419	2402.6593	2424.0779	---	---
			106Tone	RU53	18.142	2402.7393	2420.8811	---	---
			242Tone	RU61	25.654	2402.9790	2428.6334	---	---
			484Tone	RU65	37.882	2403.0589	2440.9411	---	---
		2437	26Tone	RU8	21.179	2418.9381	2440.1169	---	---
			52Tone	RU40	23.177	2418.0589	2441.2358	---	---
			106Tone	RU54	20.619	2417.9790	2438.5984	---	---
			242Tone	RU61	19.341	2417.8192	2437.1598	---	---
			484Tone	RU65	37.802	2418.0589	2455.8611	---	---
		2452	26Tone	RU17	18.621	2452.9590	2471.5804	---	---
			52Tone	RU44	18.462	2453.0390	2471.5005	---	---
			106Tone	RU56	19.98	2451.2008	2471.1808	---	---
			242Tone	RU62	21.578	2449.6024	2471.1808	---	---
			484Tone	RU65	37.802	2433.1389	2470.9411	---	---

11B_Ant1_2412



Date: 19.DEC.2025 15:33:41

11B_Ant1_2437

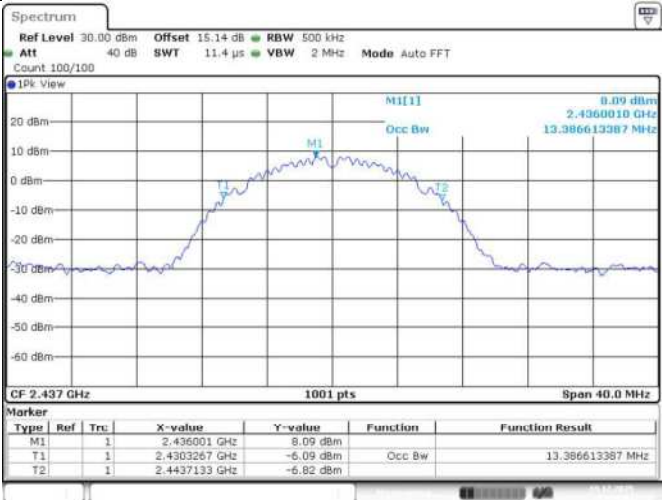

Date: 19.DEC.2025 15:38:06

11B_Ant1_2462




Date: 19.DEC.2025 15:40:57

11G_Ant1_2412



Date: 19.DEC.2025 15:42:29

11G_Ant1_2437

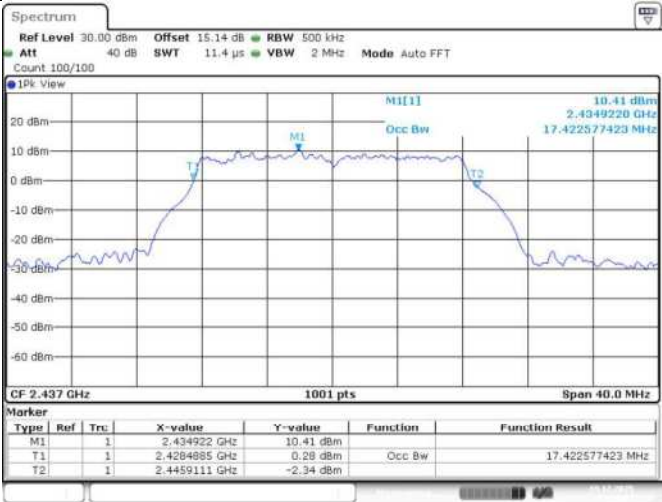


Date: 19.DEC.2025 15:44:31

11G_Ant1_2462




Date: 19.DEC.2025 15:46:27

11N20SISO_Ant1_2412

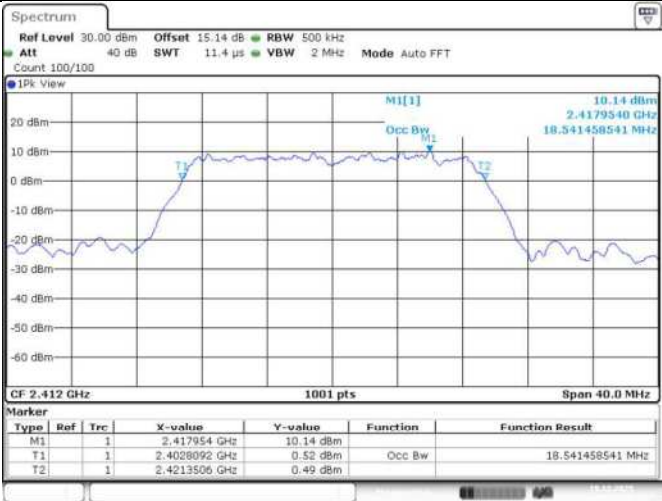

Date: 19.DEC.2025 15:51:02

11N20SISO_Ant1_2437

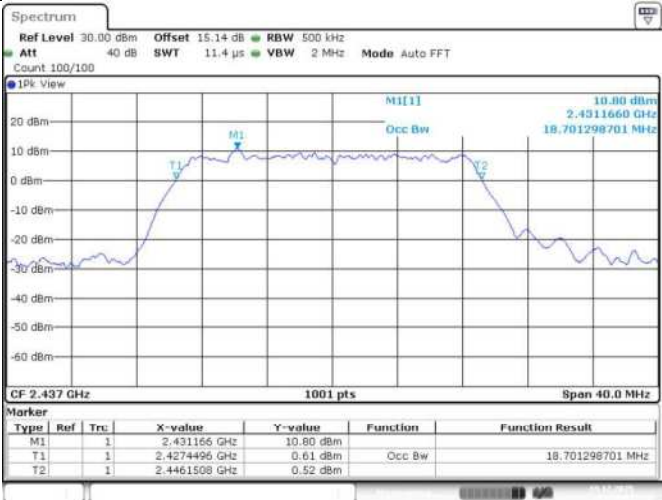


Date: 19.DEC.2025 15:53:10

11N20SISO_Ant1_2462




Date: 19.DEC.2025 15:55:17

11N40SISO Ant1_2422

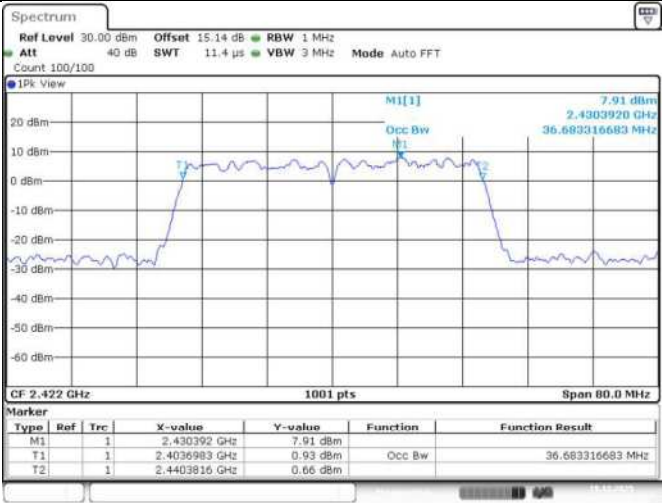


Date: 19.DEC.2025 16:55:34

11N40SISO Ant1_2437

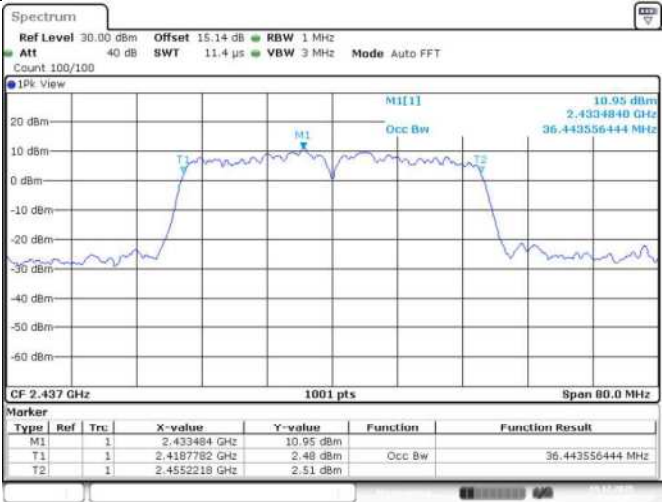

Date: 19.DEC.2025 16:56:06

11N40SISO Ant1_2452

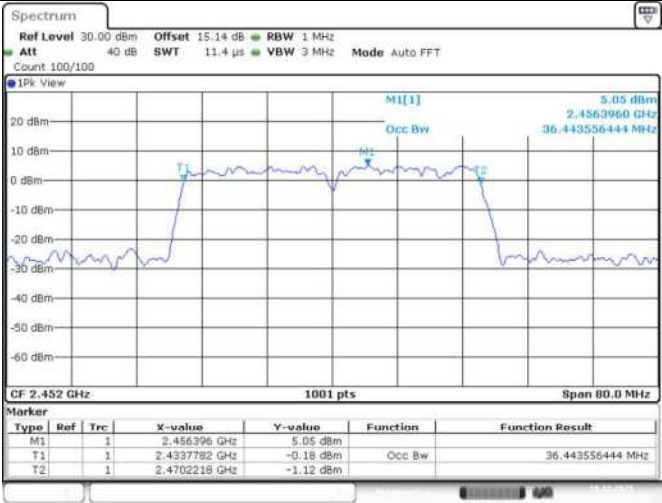


Date: 19.DEC.2025 16:56:30

11AX20SISO_Ant1_2412_26Tone_RU0



Date: 6-JAN-2026 13:50:11

11AX20SISO_Ant1_2412_52Tone_RU37

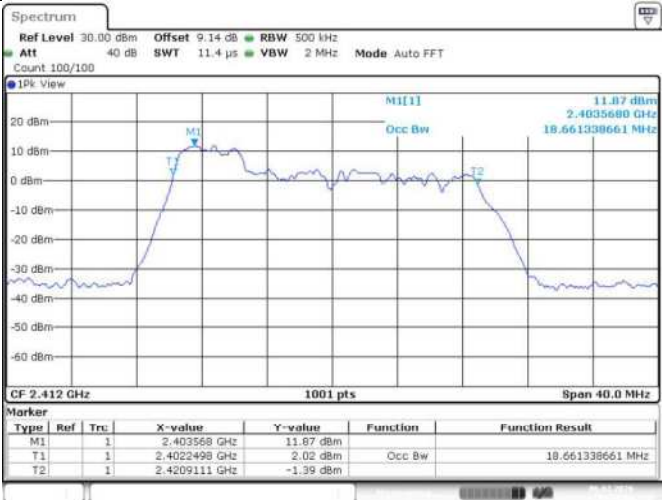

Date: 6-JAN-2026 13:57:40

11AX20SISO_Ant1_2412_106Tone_RU53



Date: 6-JAN-2026 13:59:38