Mode	2
	Band Edge - L
	U-NII-1_5.15-5.25_802.11a_CH40_5200MHz
ANT	DB 1+2+3+4 (CDD)

Pol.	Horizontal	Fundamental

Peak

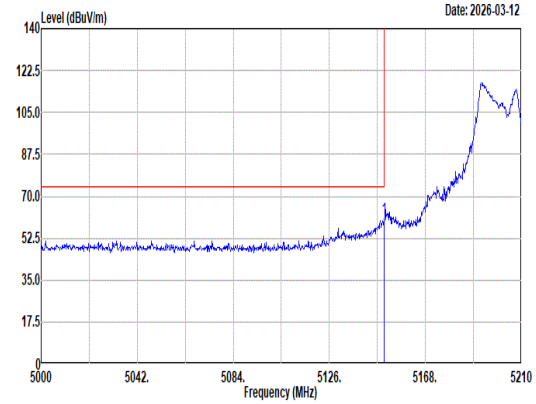

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5149.94	60.59	74.00	-13.41	51.62	33.20	12.67	36.90	0.00	131	96	Peak

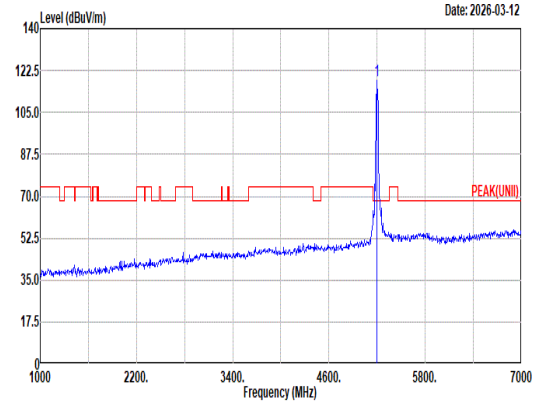

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5200.00	118.13	------	------	109.29	33.02	12.72	36.90	0.00	131	96	Peak

Avg

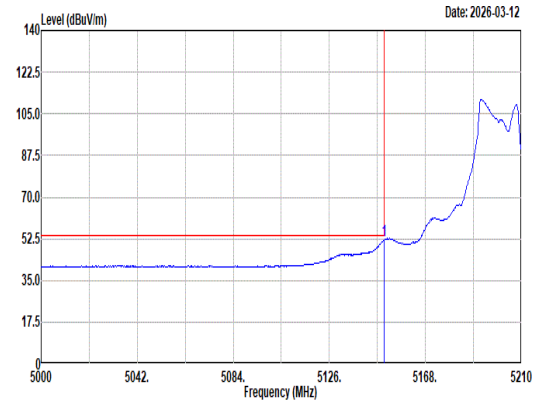

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:0.510kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5149.94	51.85	54.00	-2.15	42.88	33.20	12.67	36.90	0.00	131	96	Average

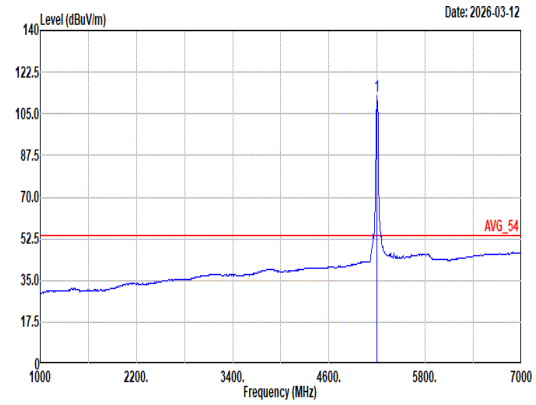

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:0.510kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5200.00	112.53	------	------	103.69	33.02	12.72	36.90	0.00	131	96	Average

Mode	2	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11a_CH40_5200MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Fundamental
Peak	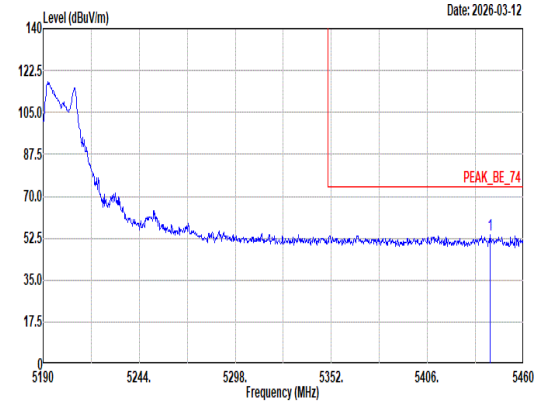 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5441.37 53.81 74.00 -20.19 44.82 32.80 13.09 36.90 0.00 131 96 Peak	Blank
Avg	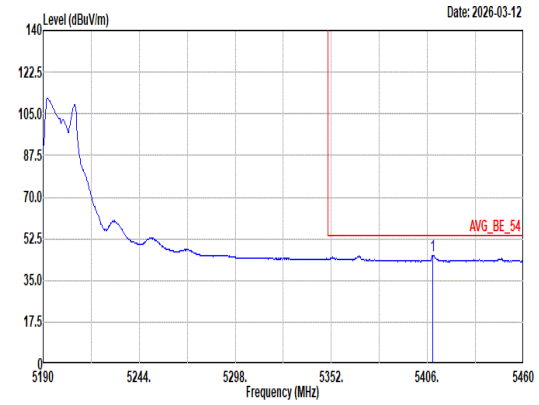 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.510kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5408.97 45.45 54.00 -8.55 36.48 32.80 13.07 36.90 0.00 131 96 Average	Blank

Mode	2
	Band Edge - L
	U-NII-1_5.15-5.25_802.11a_CH40_5200MHz
ANT	DB 1+2+3+4 (CDD)

Pol.	Vertical	Fundamental

Peak

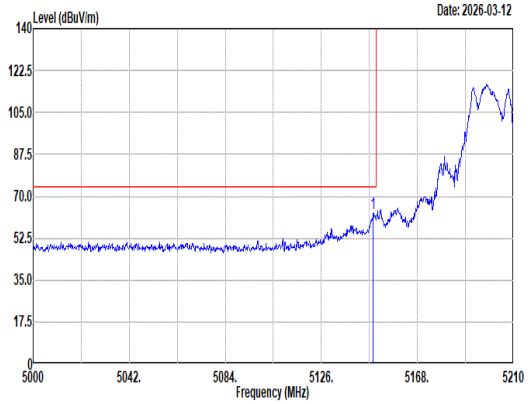

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5148.68	62.68	74.00	-11.32	53.72	33.19	12.67	36.90	0.00	200	313	Peak

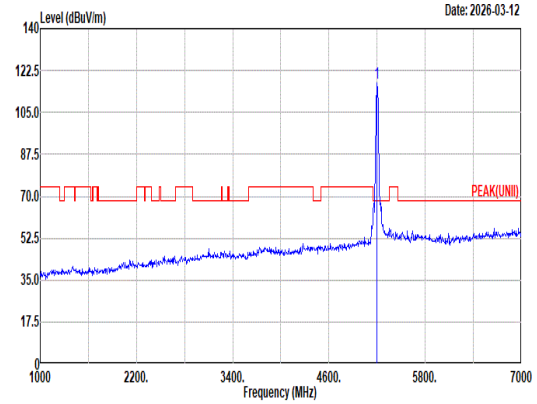

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5200.00	117.26	------	------	108.43	33.00	12.73	36.90	0.00	200	313	Peak

Avg

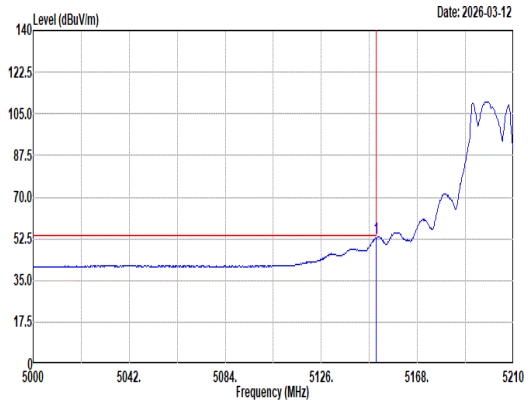

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:0.510kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5149.94	52.92	54.00	-1.08	43.95	33.20	12.67	36.90	0.00	200	313	Average

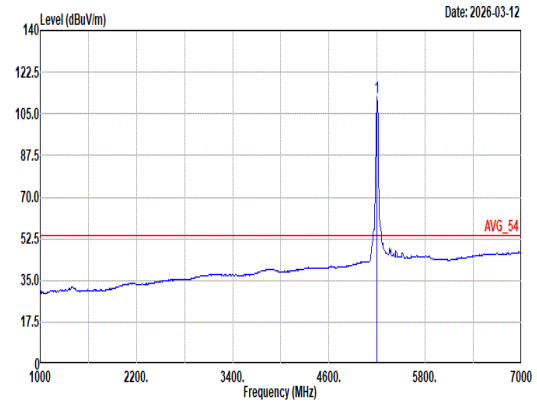

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:0.510kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5200.00	111.79	------	------	102.96	33.00	12.73	36.90	0.00	200	313	Average

Mode	2	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11a_CH40_5200MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Vertical	Fundamental
Peak	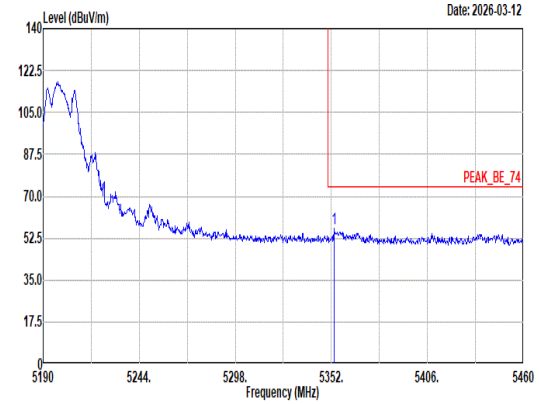 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.62 56.36 74.00 -17.64 47.38 32.89 12.99 36.90 0.00 200 313 Peak	Blank
Avg	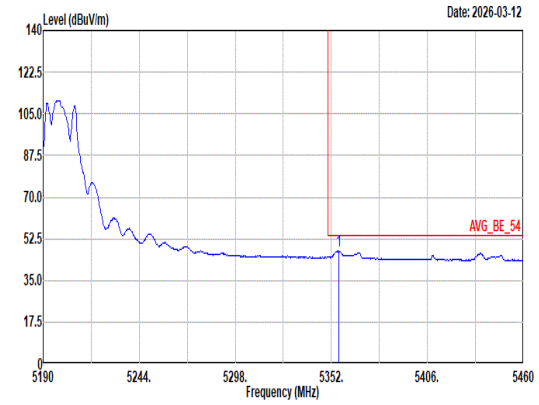 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.510kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5356.05 47.38 54.00 -6.62 38.39 32.89 13.00 36.90 0.00 200 313 Average	Blank

Mode	2	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH40_5200MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical

Peak

Avg

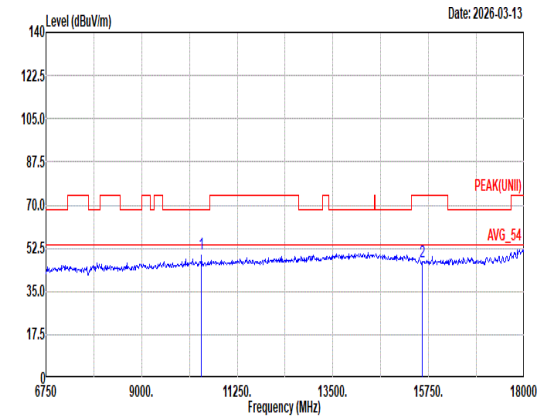

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10400.00	49.98	68.20	-18.22	51.22	38.60	18.28	58.83	0.71	200	43	Peak
2	15600.00	47.20	74.00	-26.80	44.28	38.20	22.71	58.47	0.48	--	--	Peak

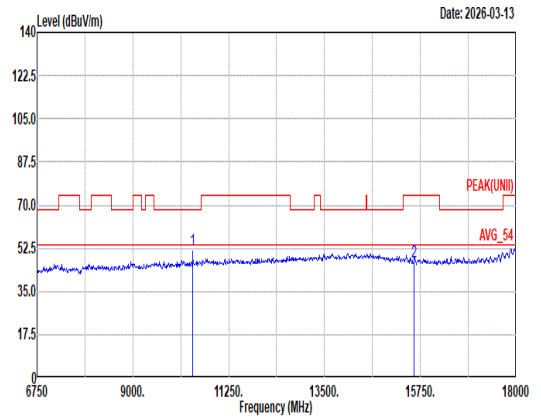

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10400.00	51.85	68.20	-16.35	53.09	38.60	18.28	58.83	0.71	300	106	Peak
2	15600.00	47.04	74.00	-26.96	44.12	38.20	22.71	58.47	0.48	--	--	Peak

Mode	2	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH40_5200MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	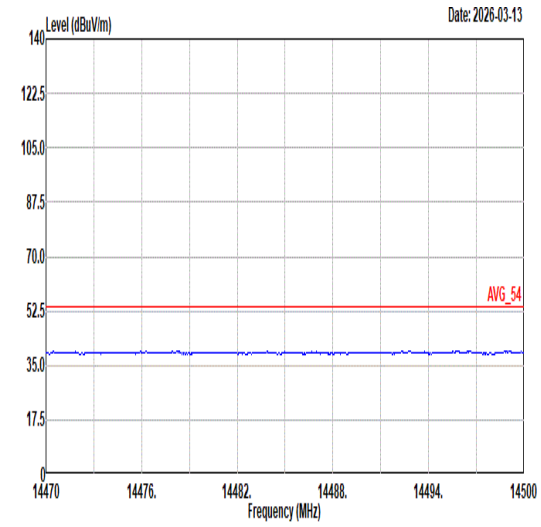 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	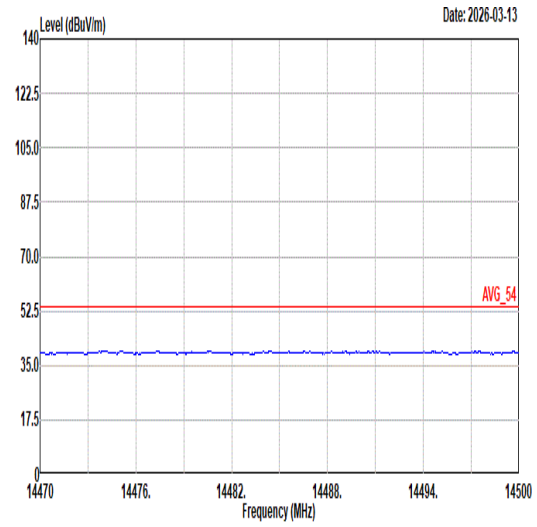 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	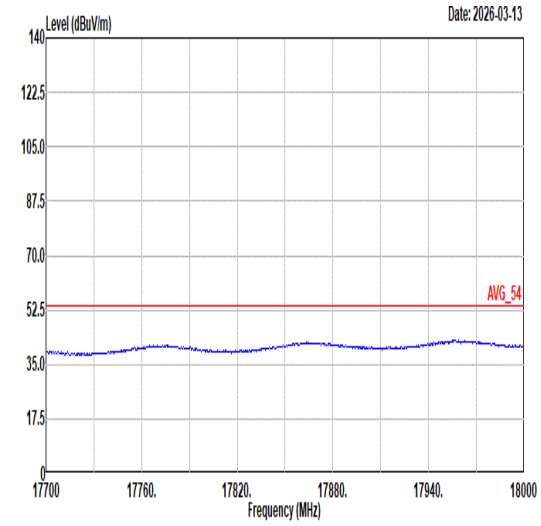 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	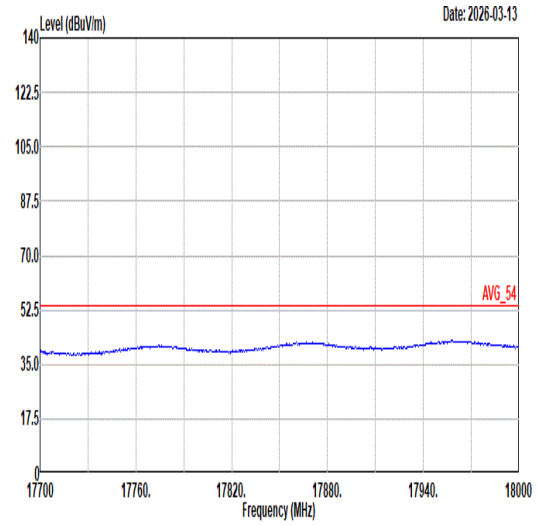 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL

Mode	3	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Fundamental

Peak

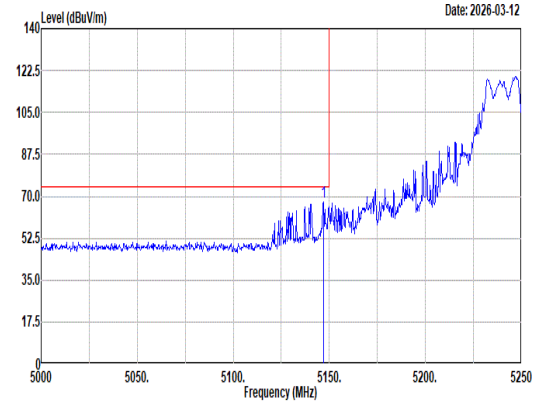

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5147.00	67.48	74.00	-6.52	58.53	33.19	12.66	36.90	0.00	260	87	Peak

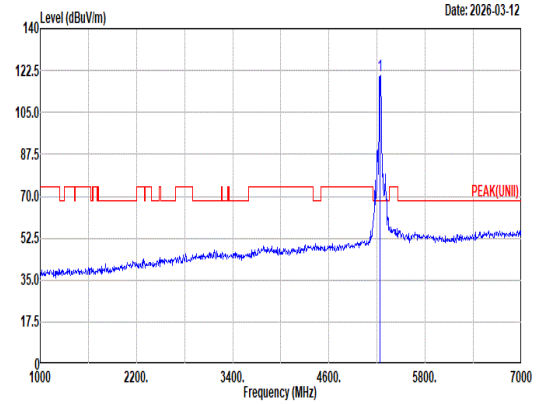

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5240.00	120.41	------	------	111.60	32.90	12.81	36.90	0.00	260	87	Peak

Avg

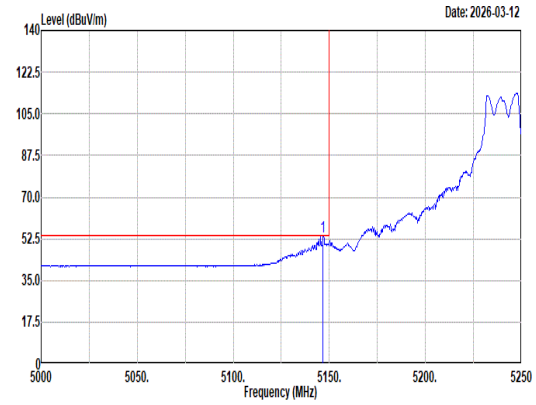

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:0.510kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5146.75	53.59	54.00	-0.41	44.64	33.19	12.66	36.90	0.00	260	87	Average

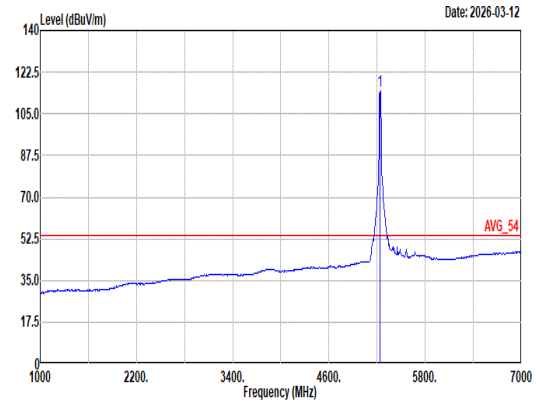

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:0.510kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5240.00	114.56	------	------	105.75	32.90	12.81	36.90	0.00	260	87	Average

Mode	3	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Fundamental
Peak	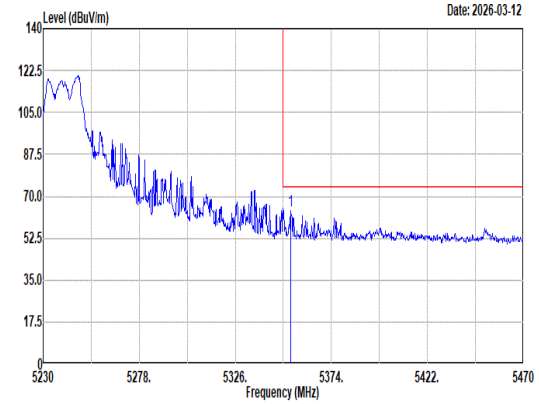 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.60 64.02 74.00 -9.98 55.04 32.89 12.99 36.90 0.00 260 87 Peak	**Blank**
Avg	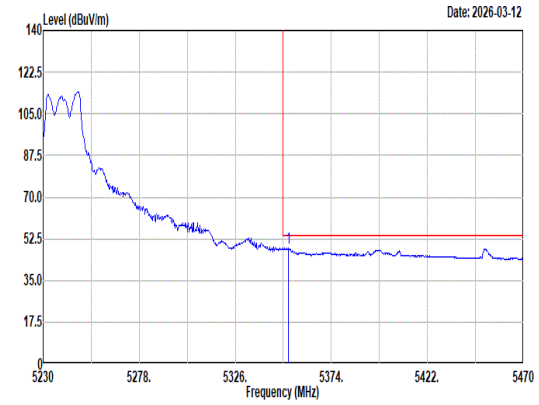 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.510kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.64 48.63 54.00 -5.37 39.65 32.89 12.99 36.90 0.00 260 87 Average	**Blank**

Mode	3	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Vertical	Fundamental

Peak

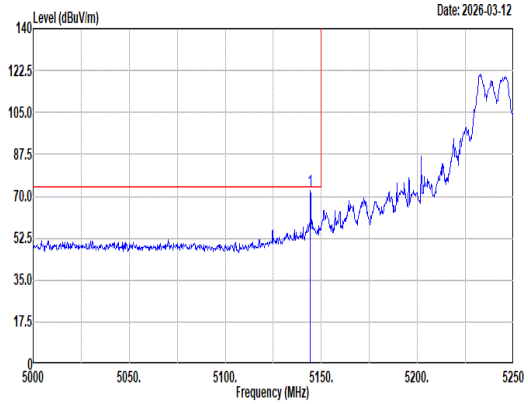

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5144.25	72.61	74.00	-1.39	63.67	33.18	12.66	36.90	0.00	144	201	Peak

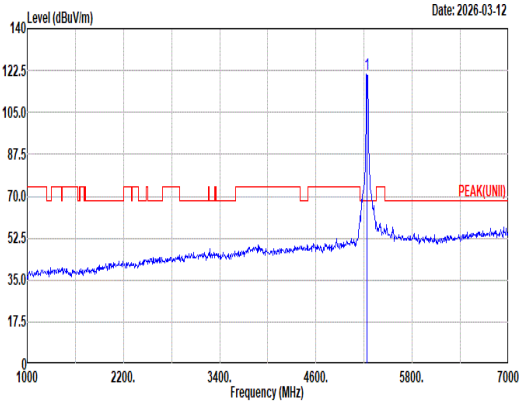

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5240.00	120.94	------	------	112.12	32.94	12.78	36.90	0.00	144	201	Peak

Avg

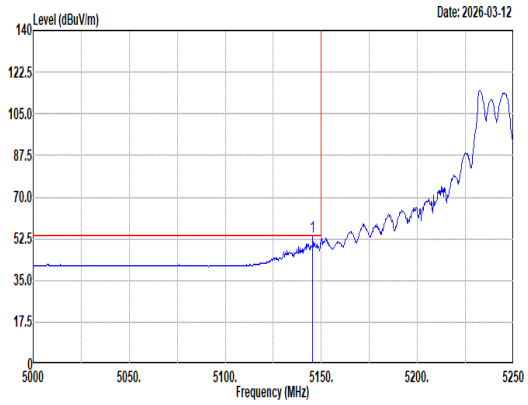

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:0.510kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5145.50	53.59	54.00	-0.41	44.65	33.18	12.66	36.90	0.00	144	201	Average

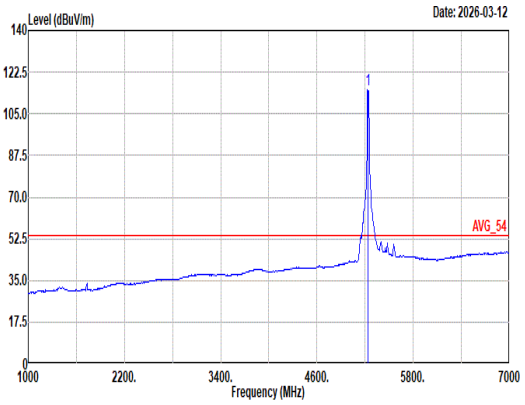

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:0.510kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5240.00	115.29	------	------	106.47	32.94	12.78	36.90	0.00	144	201	Average

Mode	3	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Vertical	Fundamental
Peak	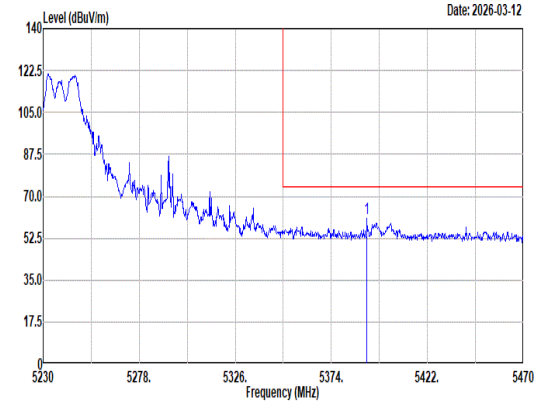 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5391.76 60.54 74.00 -13.46 51.56 32.82 13.06 36.90 0.00 144 201 Peak	Blank
Avg	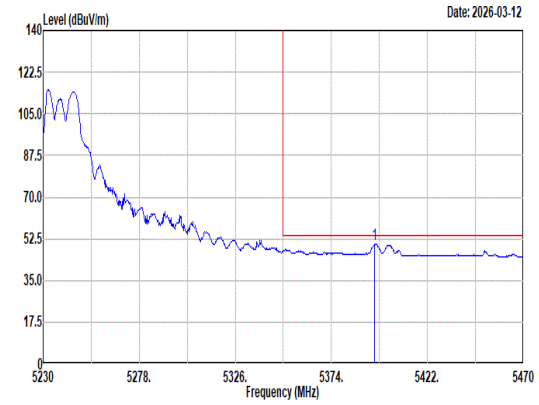 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.510kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5395.60 50.17 54.00 -3.83 41.20 32.81 13.06 36.90 0.00 144 201 Average	Blank

Mode	3	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical

Peak

Avg

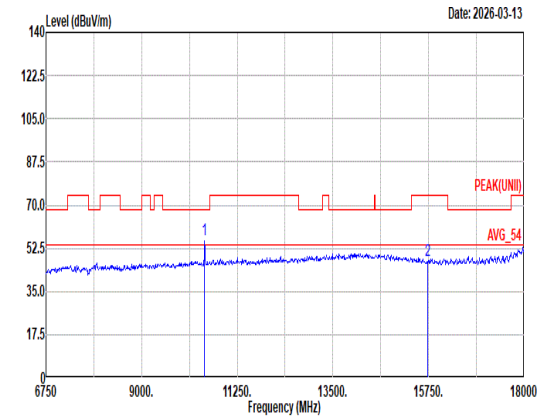

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10480.00	55.82	68.20	-12.38	56.89	38.68	18.36	58.81	0.70	200	42	Peak
2	15720.00	47.70	74.00	-26.30	45.00	37.96	22.80	58.53	0.47	--	--	Peak

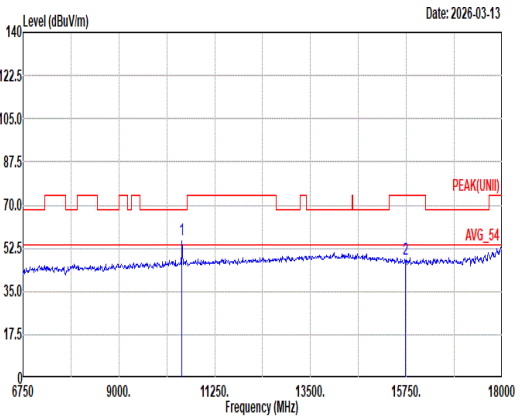

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10480.00	55.80	68.20	-12.40	56.87	38.68	18.36	58.81	0.70	200	97	Peak
2	15720.00	47.96	74.00	-26.04	45.26	37.96	22.80	58.53	0.47	--	--	Peak

Mode	3	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	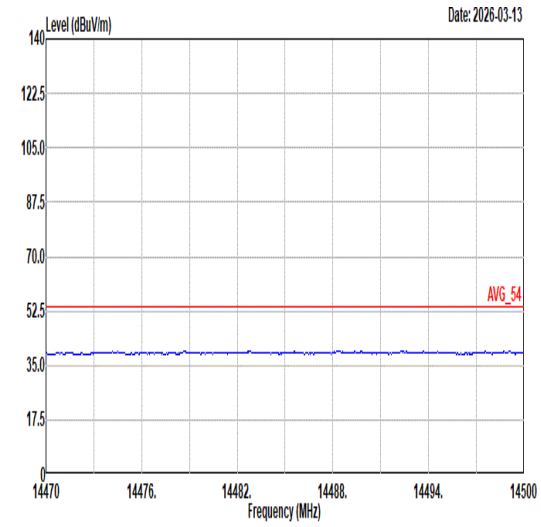 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	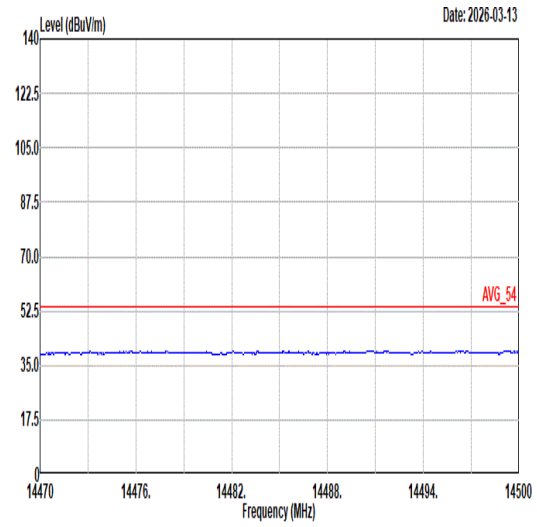 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	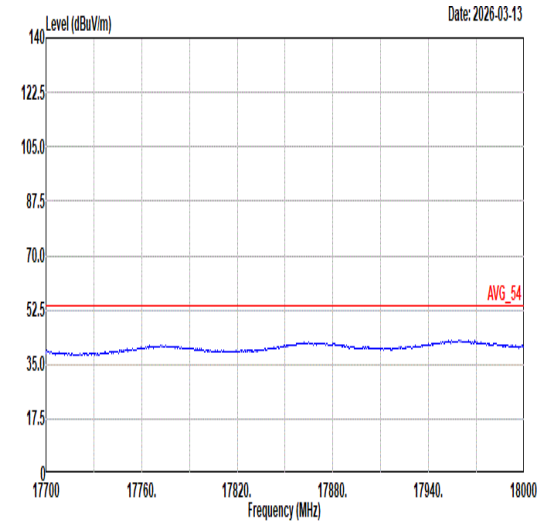 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	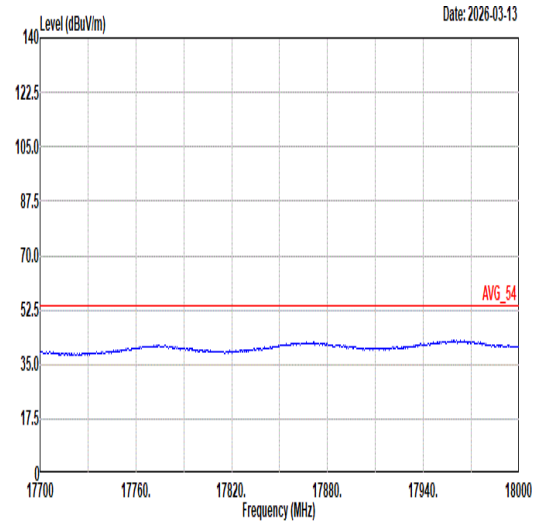 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL

Mode	4	
	Band Edge	
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full RU_5180MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Fundamental

Peak

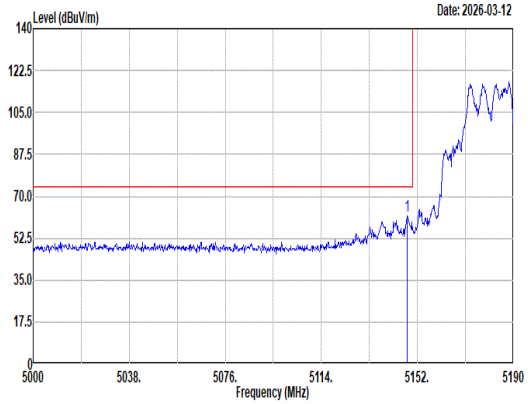

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5147.82	61.76	74.00	-12.24	52.81	33.19	12.66	36.90	0.00	313	82	Peak

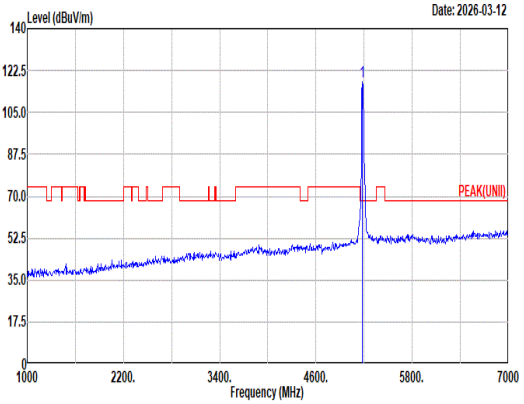

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5180.00	117.68	------	------	108.80	33.07	12.71	36.90	0.00	313	82	Peak

Avg

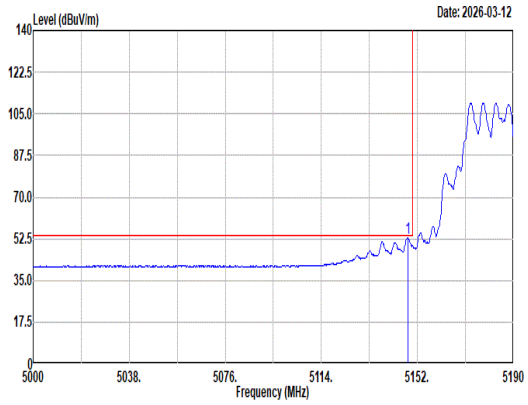

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:0.680kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5148.20	53.07	54.00	-0.93	44.11	33.19	12.67	36.90	0.00	313	82	Average

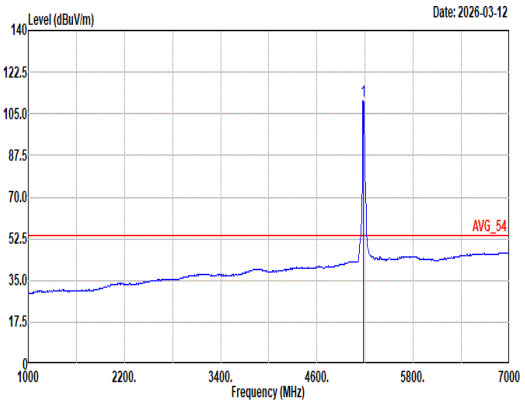

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:0.680kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5180.00	110.64	------	------	101.74	33.10	12.70	36.90	0.00	313	82	Average

Mode	4	
	Band Edge	
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full RU_5180MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Vertical	Fundamental

Peak

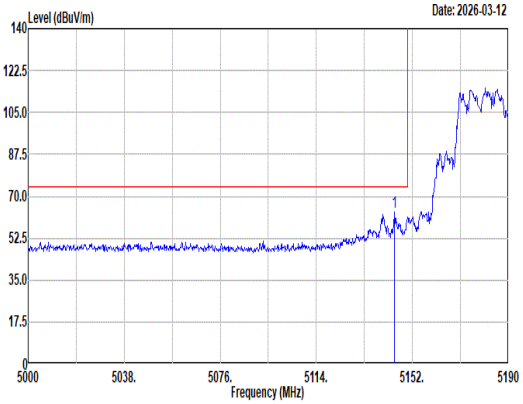

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5144.97	63.51	74.00	-10.49	54.57	33.18	12.66	36.90	0.00	100	16	Peak

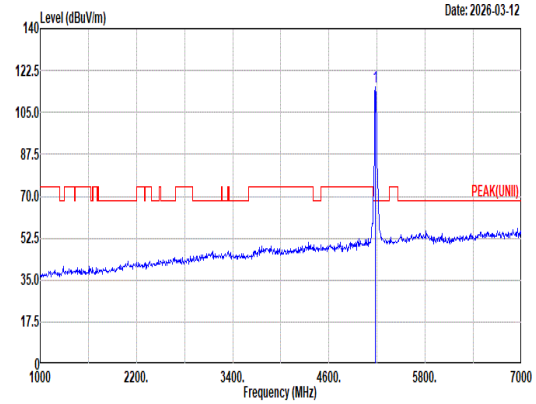

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5180.00	115.68	------	------	106.78	33.10	12.70	36.90	0.00	100	16	Peak

Avg

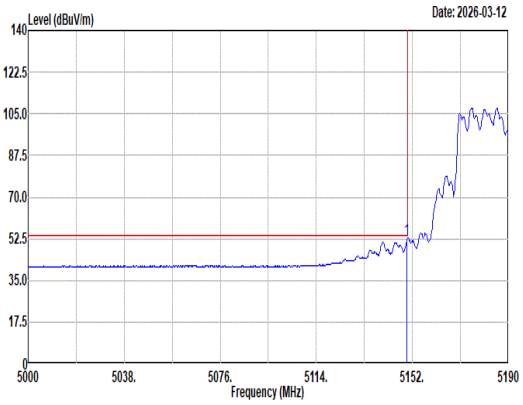

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:0.680kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5149.91	52.24	54.00	-1.76	43.27	33.20	12.67	36.90	0.00	100	16	Average

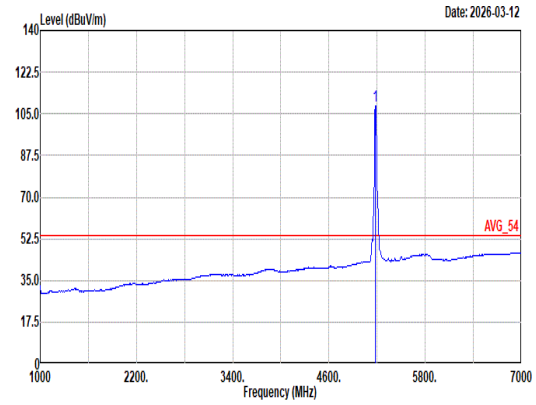

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:0.680kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5180.00	108.49	------	------	99.59	33.10	12.70	36.90	0.00	100	16	Average

Mode	4	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full RU_5180MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical

Peak

Avg

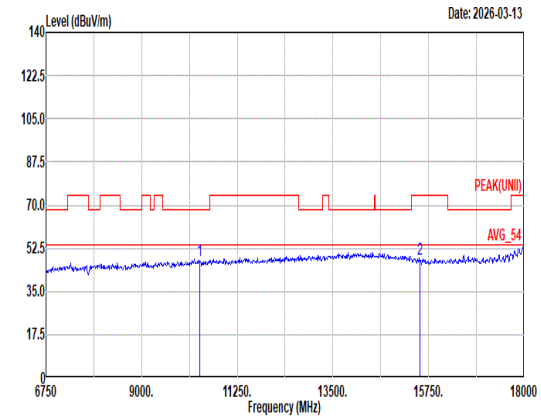

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10360.00	47.64	68.20	-20.56	48.92	38.60	18.24	58.84	0.72	--	--	Peak
2	15540.00	47.95	74.00	-26.05	45.03	38.20	22.67	58.43	0.48	--	--	Peak

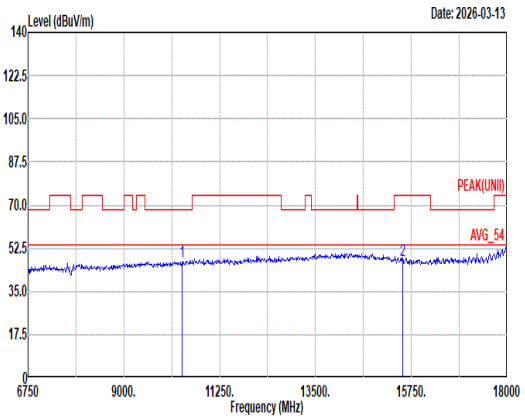

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10360.00	46.92	68.20	-21.28	48.20	38.60	18.24	58.84	0.72	--	--	Peak
2	15540.00	47.35	74.00	-26.65	44.43	38.20	22.67	58.43	0.48	--	--	Peak

Mode	4	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full RU_5180MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	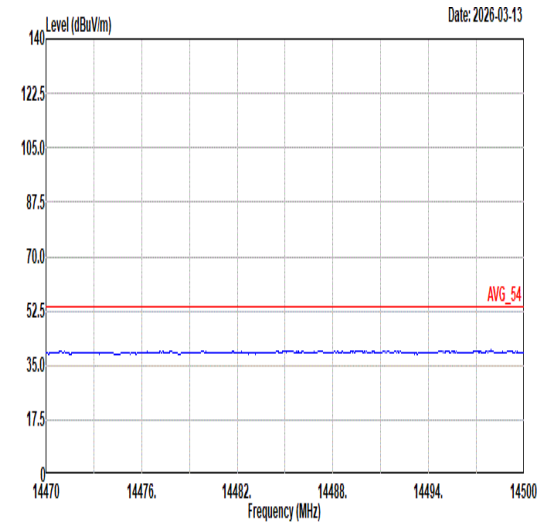 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	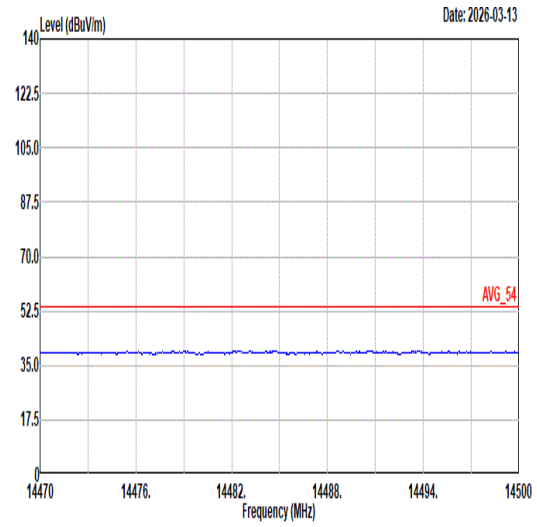 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	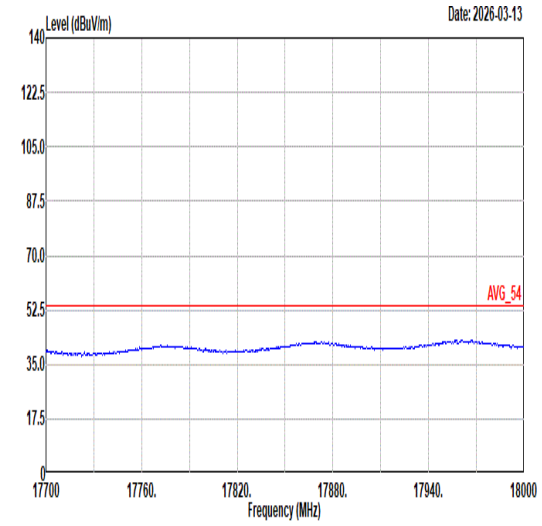 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	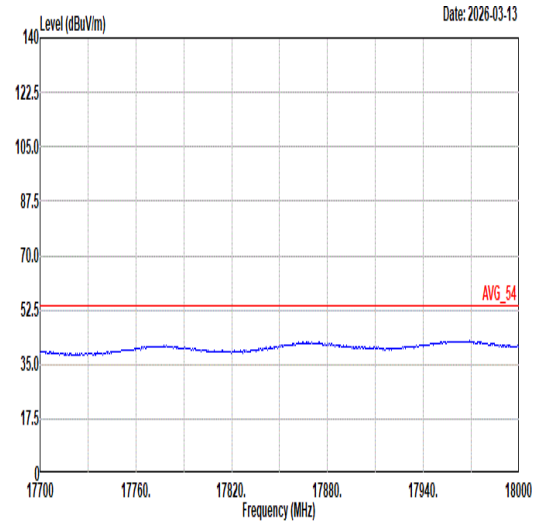 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL

Mode	5	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11be EHT20_CH40_Full RU_5200MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Fundamental

Peak

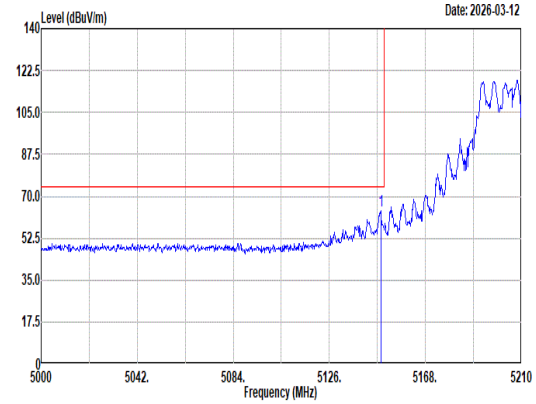

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5148.47	63.69	74.00	-10.31	54.73	33.19	12.67	36.90	0.00	326	79	Peak

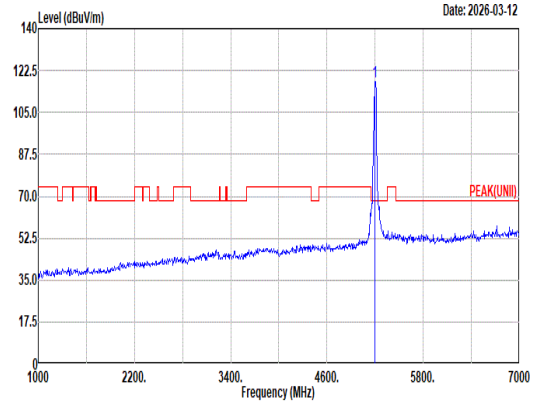

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5200.00	118.06	------	------	109.22	33.02	12.72	36.90	0.00	326	79	Peak

Avg

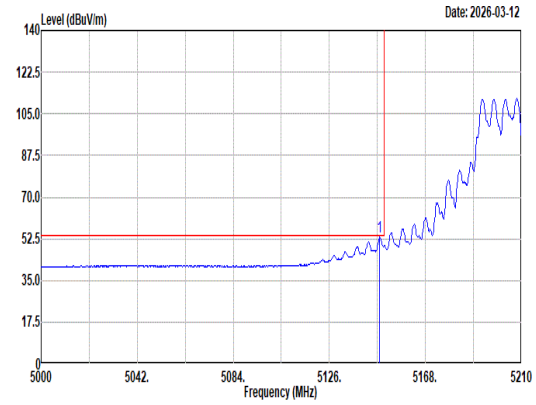

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:0.680kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5148.05	53.11	54.00	-0.89	44.15	33.19	12.67	36.90	0.00	326	79	Average

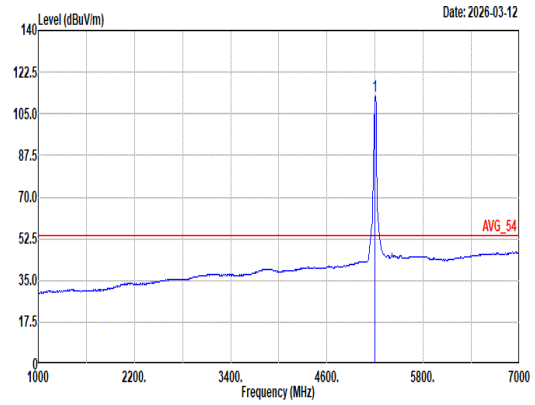

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:0.680kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5200.00	112.30	------	------	103.47	32.99	12.74	36.90	0.00	326	79	Average

Mode	5	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11be EHT20_CH40_Full RU_5200MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Fundamental
Peak	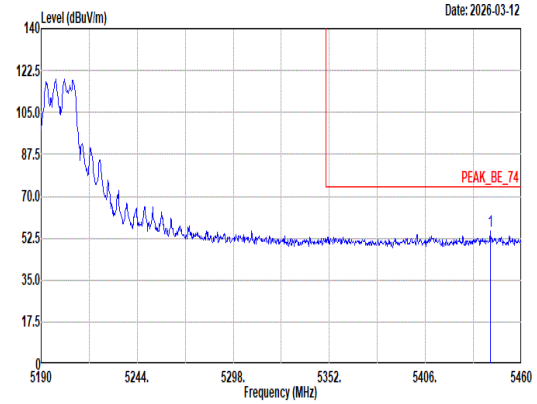 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5442.45 55.68 74.00 -18.32 46.69 32.80 13.09 36.90 0.00 326 79 Peak	Blank
Avg	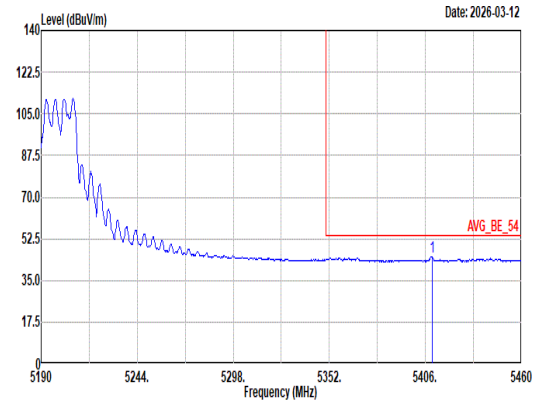 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5409.78 44.92 54.00 -9.08 35.94 32.80 13.08 36.90 0.00 326 79 Average	Blank

Mode	5
	Band Edge - L
	U-NII-1_5.15-5.25_802.11be EHT20_CH40_Full RU_5200MHz
ANT	DB 1+2+3+4 (CDD)

Pol.	Vertical	Fundamental
Peak	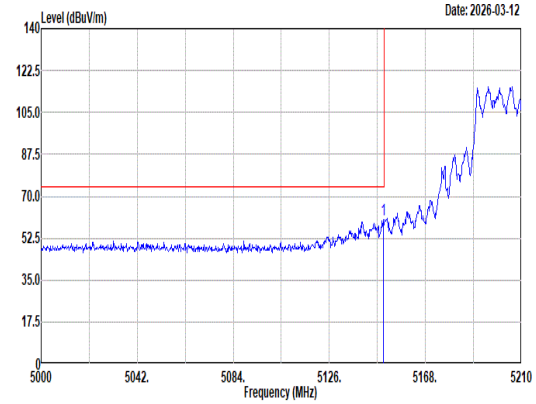 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.52 60.48 74.00 -13.52 51.51 33.20 12.67 36.90 0.00 399 0 Peak	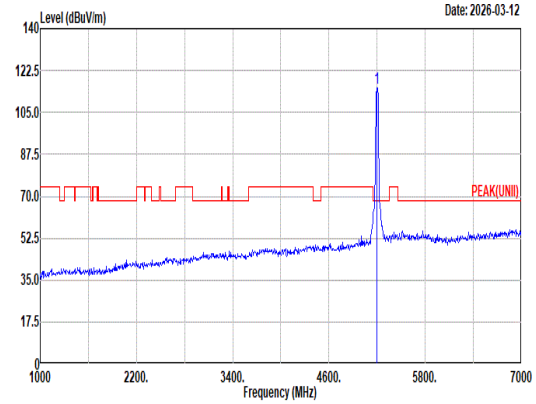 Site : 03CH15-HY Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5200.00 115.01 ------ ------ 106.18 32.99 12.74 36.90 0.00 399 0 Peak
Avg	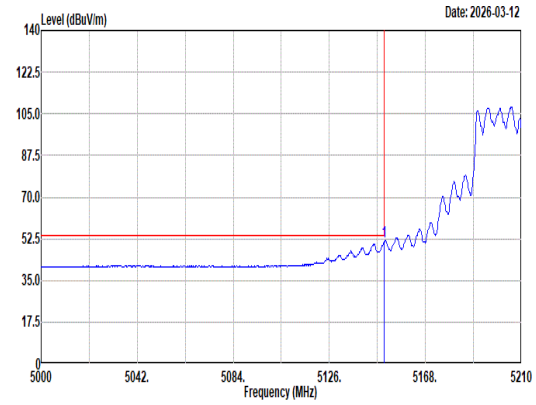 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.94 51.07 54.00 -2.93 42.10 33.20 12.67 36.90 0.00 399 0 Average	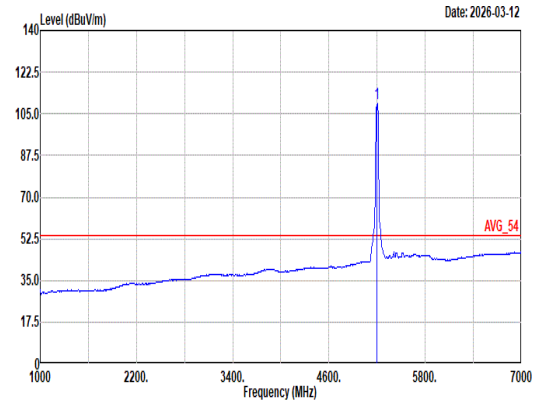 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5200.00 109.24 ------ ------ 100.41 32.99 12.74 36.90 0.00 399 0 Average

Mode	5	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11be EHT20_CH40_Full RU_5200MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Vertical	Fundamental
Peak	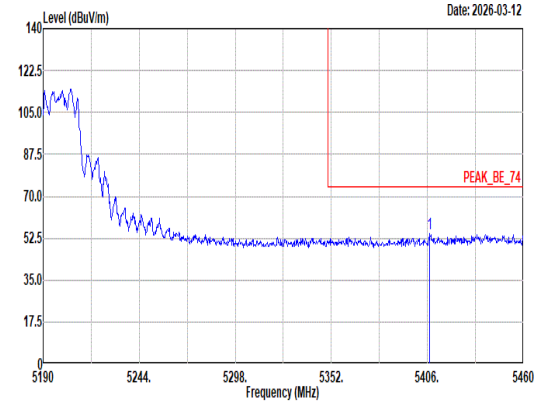 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5407.35 54.33 74.00 -19.67 45.36 32.80 13.07 36.90 0.00 399 0 Peak	Blank
Avg	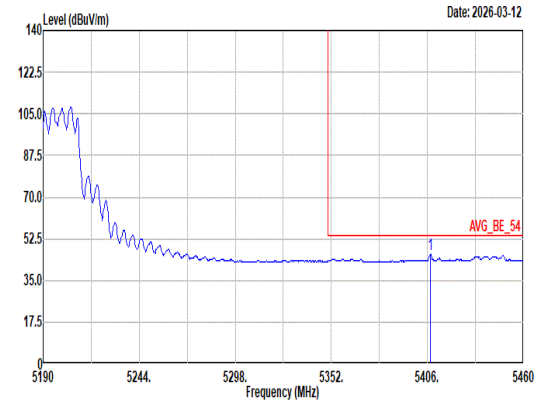 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5407.62 45.88 54.00 -8.12 36.91 32.80 13.07 36.90 0.00 399 0 Average	Blank

Mode	5	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT20_CH40_Full RU_5200MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical

Peak

Avg

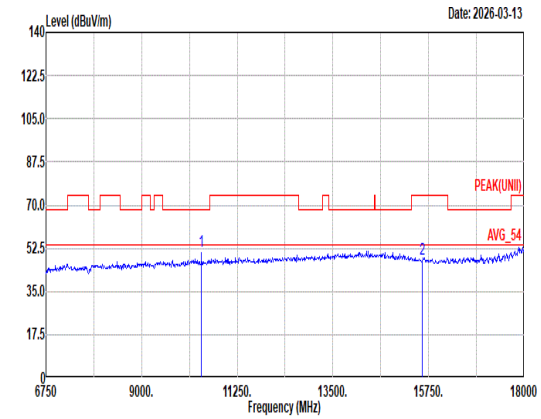

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10400.00	50.98	68.20	-17.22	52.22	38.60	18.28	58.83	0.71	200	43	Peak
2	15600.00	47.94	74.00	-26.06	45.02	38.20	22.71	58.47	0.48	--	--	Peak

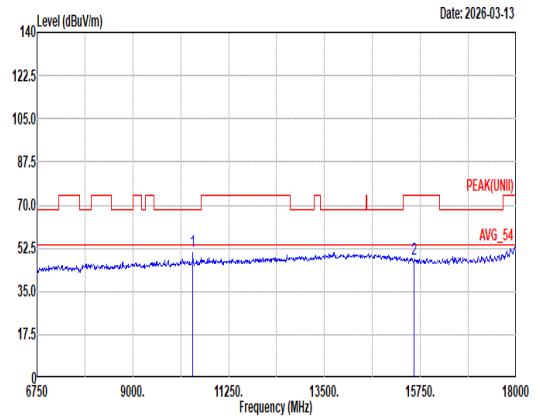

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10400.00	51.26	68.20	-16.94	52.50	38.60	18.28	58.83	0.71	300	106	Peak
2	15600.00	47.92	74.00	-26.08	45.00	38.20	22.71	58.47	0.48	--	--	Peak

Mode	5	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT20_CH40_Full RU_5200MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	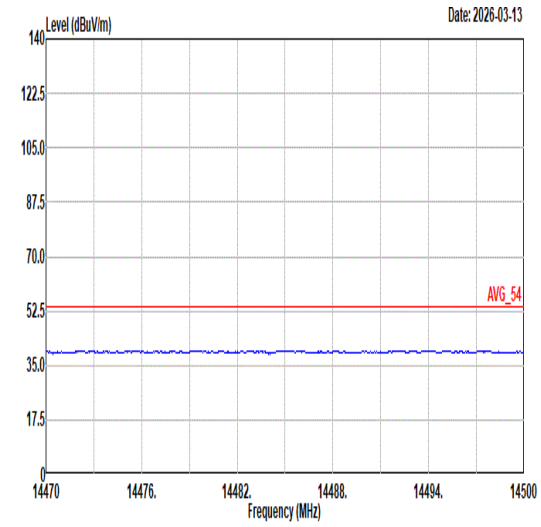 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	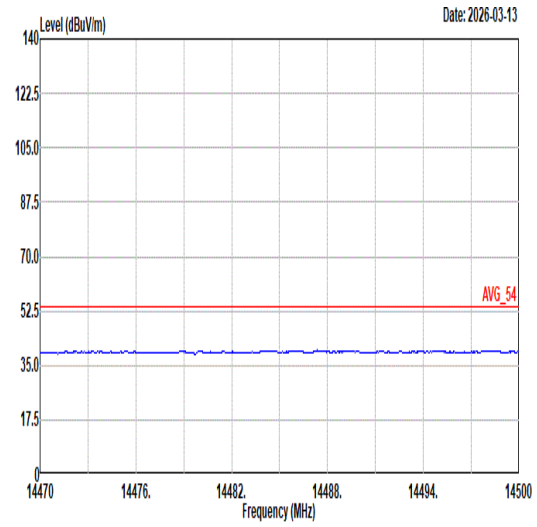 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	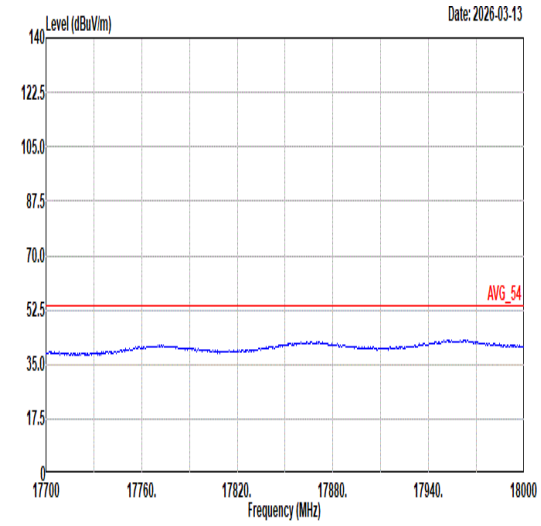 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	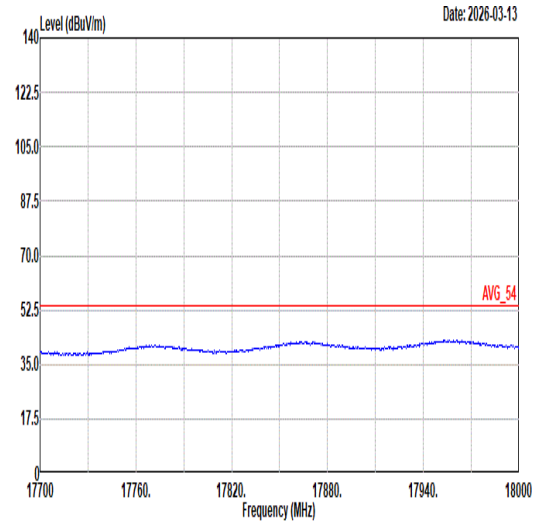 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL

Mode	6	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_Full RU_5240MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Fundamental

Peak

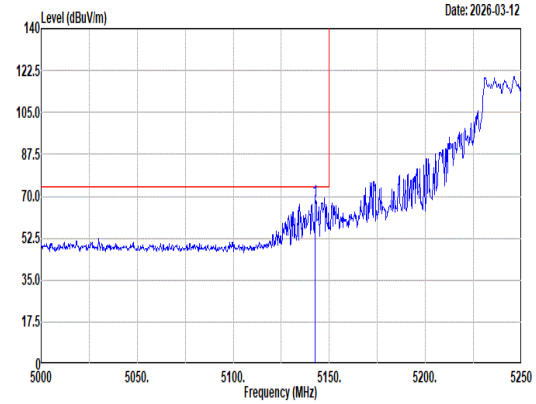

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5142.75	68.19	74.00	-5.81	59.26	33.17	12.66	36.90	0.00	145	93	Peak

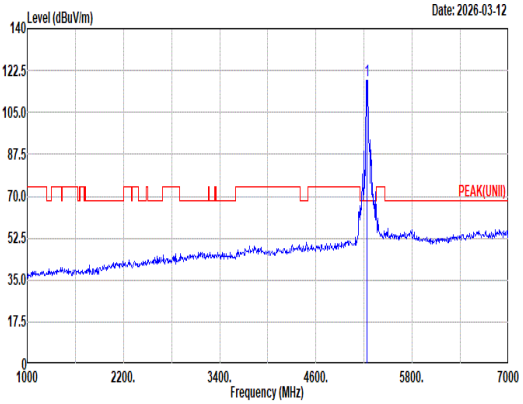

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5240.00	118.52	------	------	109.71	32.90	12.81	36.90	0.00	145	93	Peak

Avg

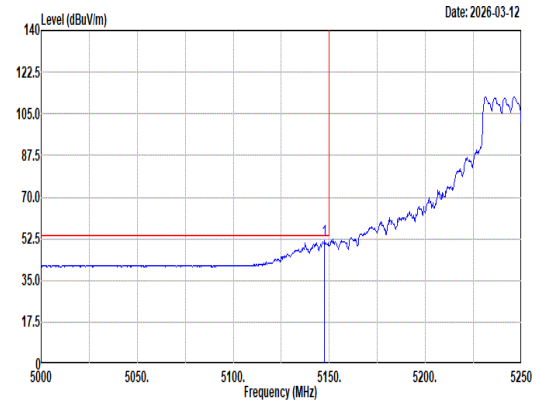

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:0.680kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5147.50	51.92	54.00	-2.08	42.97	33.19	12.66	36.90	0.00	145	93	Average

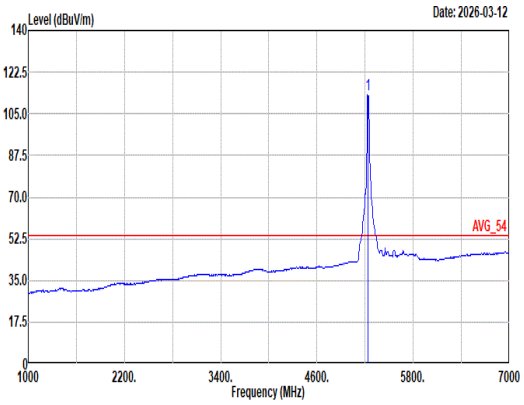

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:0.680kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5240.00	113.06	------	------	104.24	32.94	12.78	36.90	0.00	145	93	Average

Mode	6	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_Full RU_5240MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Fundamental
Peak	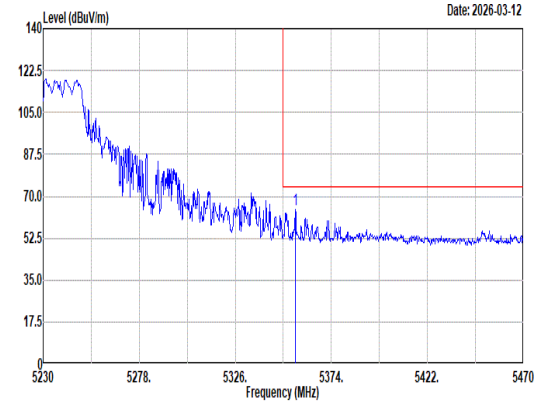 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5356.00 64.48 74.00 -9.52 55.49 32.89 13.00 36.90 0.00 145 93 Peak	Blank
Avg	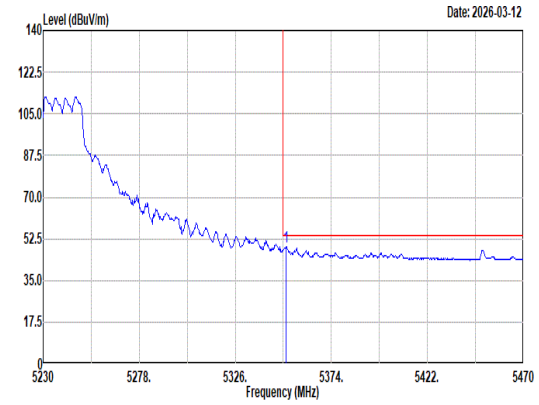 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.44 49.30 54.00 -4.70 40.31 32.90 12.99 36.90 0.00 145 93 Average	Blank

Mode	6
	Band Edge - L
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_Full RU_5240MHz
ANT	DB 1+2+3+4 (CDD)

Pol.	Vertical	Fundamental
Peak	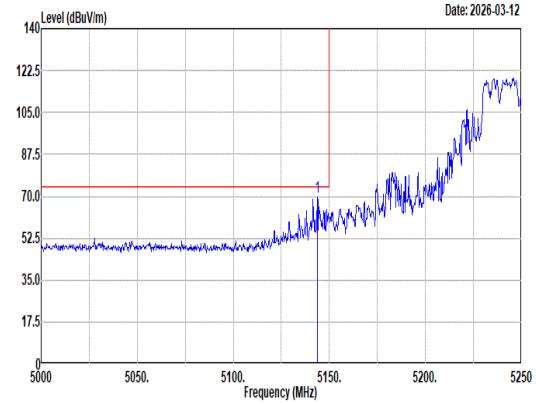 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5143.75 69.56 74.00 -4.44 60.63 33.17 12.66 36.90 0.00 200 19 Peak	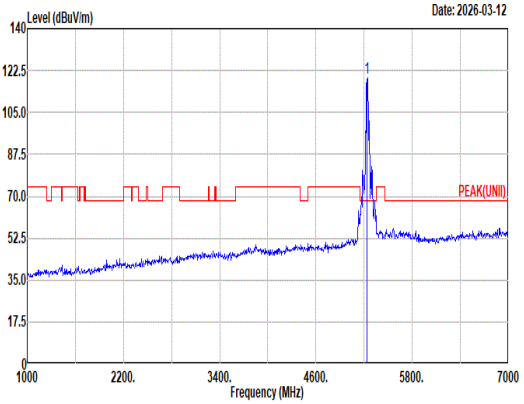 Site : 03CH15-HY Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 119.15 ------ ------ 110.34 32.90 12.81 36.90 0.00 200 19 Peak
Avg	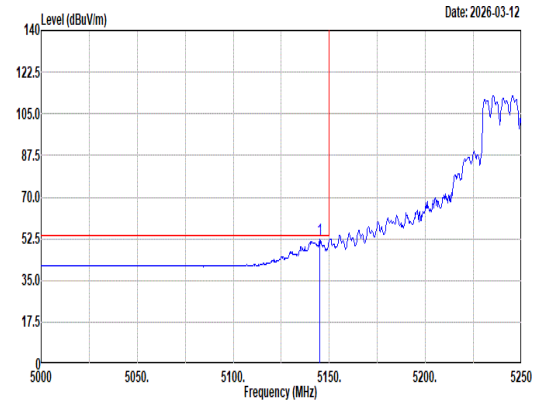 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5145.00 52.09 54.00 -1.91 43.15 33.18 12.66 36.90 0.00 200 19 Average	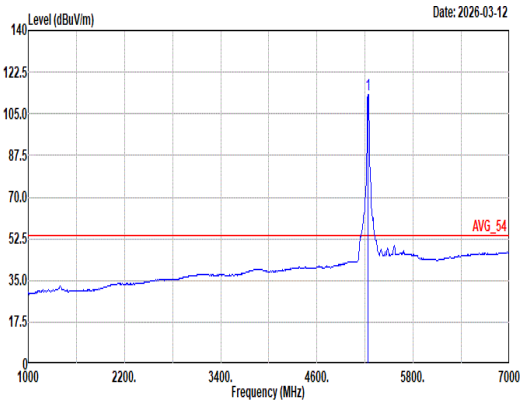 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 113.13 ------ ------ 104.32 32.90 12.81 36.90 0.00 200 19 Average

Mode	6	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_Full RU_5240MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Vertical	Fundamental
Peak	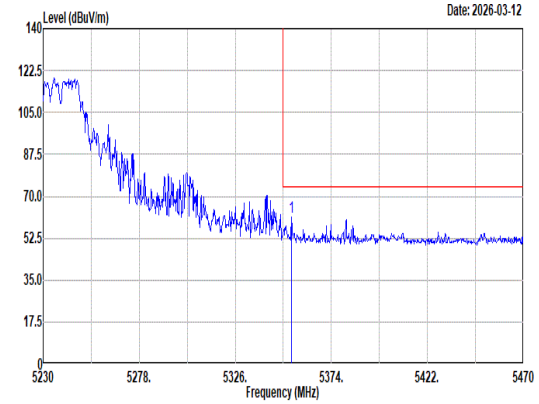 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5354.08 61.21 74.00 -12.79 52.23 32.89 12.99 36.90 0.00 200 19 Peak	**Blank**
Avg	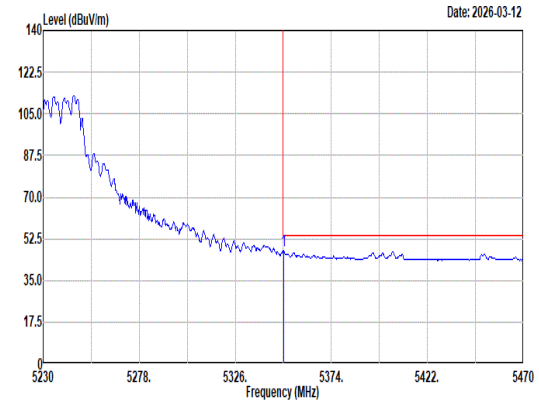 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.24 47.45 54.00 -6.55 38.46 32.90 12.99 36.90 0.00 200 19 Average	**Blank**

Mode	6
	Harmonic
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_Full RU_5240MHz
ANT	DB 1+2+3+4 (CDD)

Pol.	Horizontal	Vertical
Peak Avg	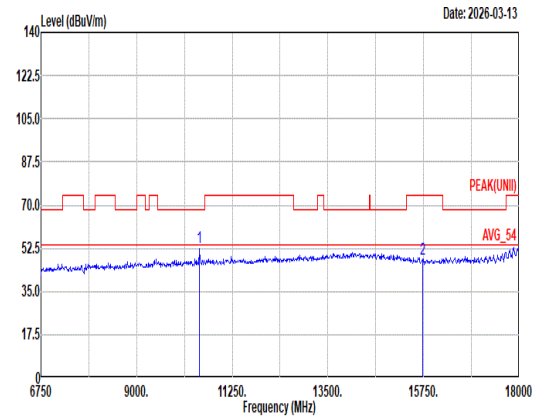 Site : 03CH15-HY Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10480.00 53.03 68.20 -15.17 54.10 38.68 18.36 58.81 0.70 200 42 Peak 2 15720.00 47.90 74.00 -26.10 45.20 37.96 22.80 58.53 0.47 -- -- Peak	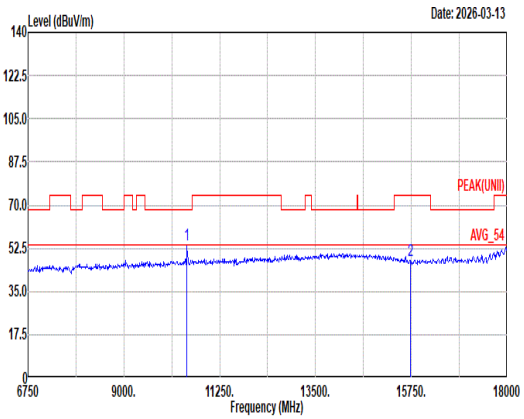 Site : 03CH15-HY Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10480.00 53.96 68.20 -14.24 55.03 38.68 18.36 58.81 0.70 200 97 Peak 2 15720.00 47.49 74.00 -26.51 44.79 37.96 22.80 58.53 0.47 -- -- Peak

Mode	6	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_Full RU_5240MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	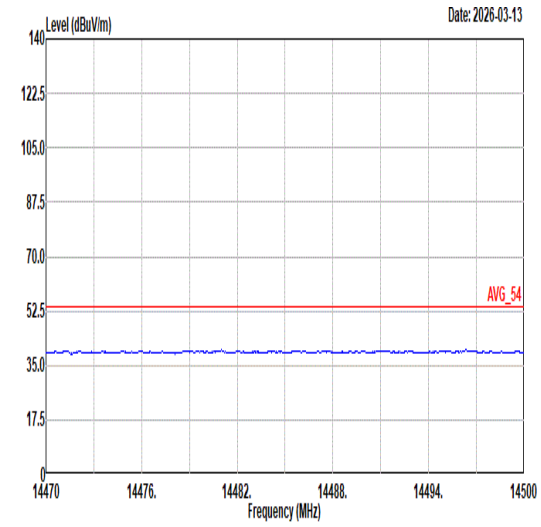 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	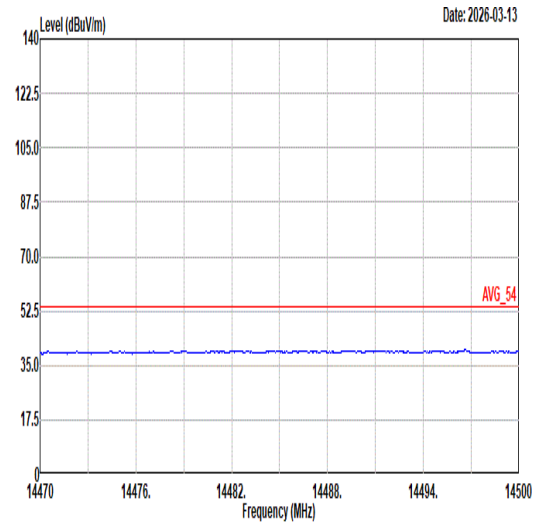 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	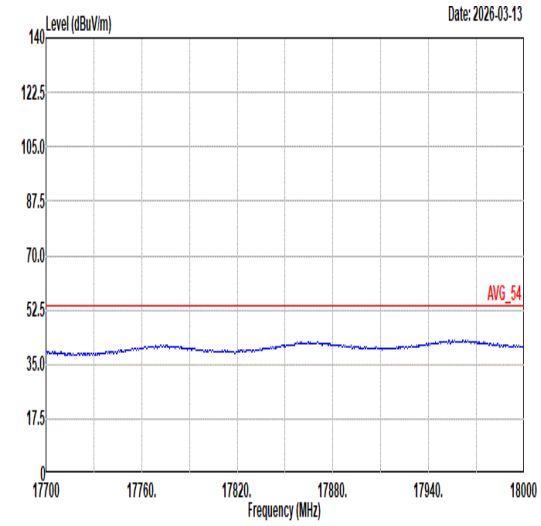 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	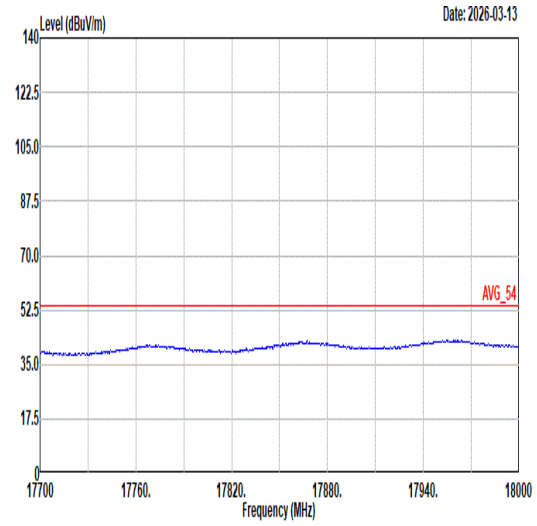 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL

Mode	7	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full RU_5190MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Fundamental

Peak

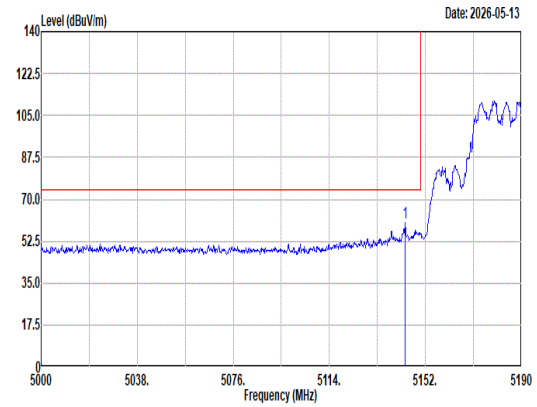

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5144.02	60.22	74.00	-13.78	51.28	33.18	12.66	36.90	0.00	300	274	Peak

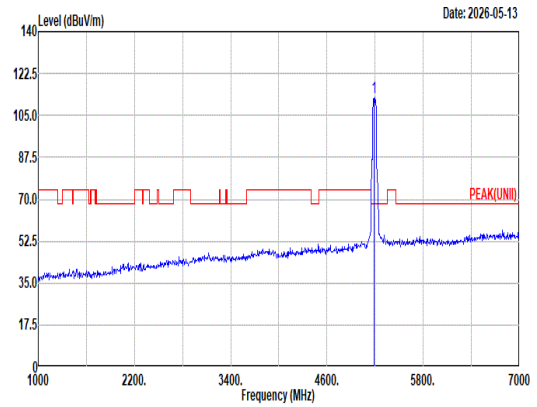

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5190.00	112.29	------	------	103.46	33.00	12.73	36.90	0.00	300	274	Peak

Avg

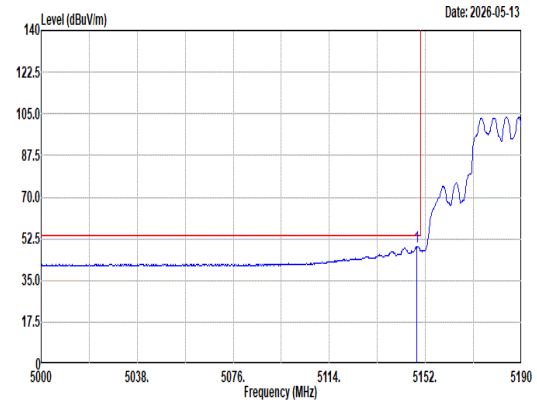

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:1.300kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5148.58	49.09	54.00	-4.91	40.13	33.19	12.67	36.90	0.00	300	274	Average

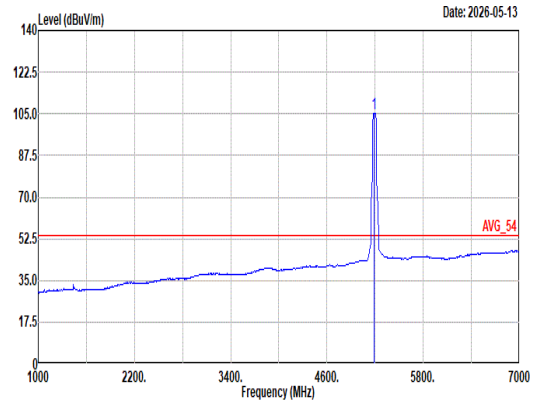

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:1.300kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5190.00	105.24	------	------	96.40	33.02	12.72	36.90	0.00	300	274	Average

Mode	7	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full RU_5190MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Fundamental
Peak	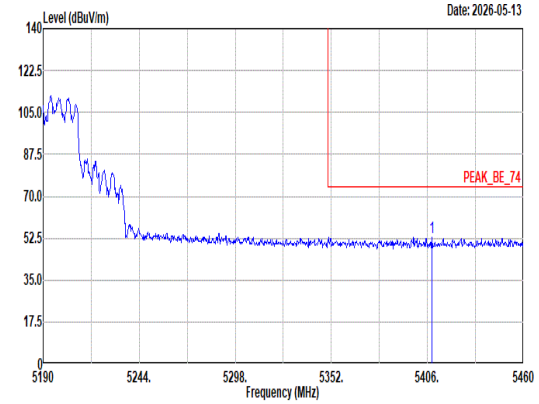 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5408.43 52.64 74.00 -21.36 43.67 32.80 13.07 36.90 0.00 300 274 Peak	Blank
Avg	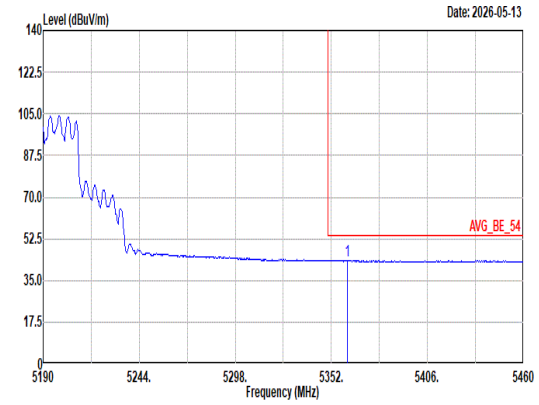 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:1.300kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5361.18 43.57 54.00 -10.43 34.59 32.88 13.00 36.90 0.00 300 274 Average	Blank

Mode	7	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full RU_5190MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Vertical	Fundamental

Peak

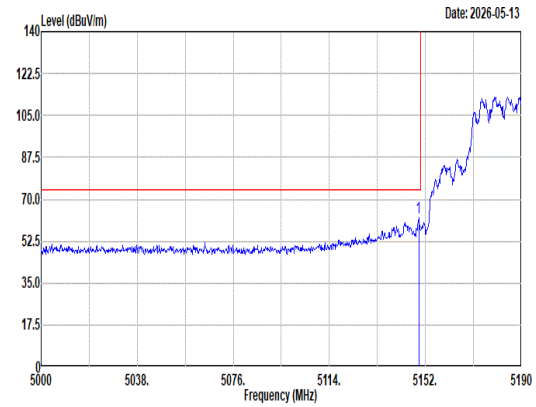

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5149.34	62.41	74.00	-11.59	53.44	33.20	12.67	36.90	0.00	200	316	Peak

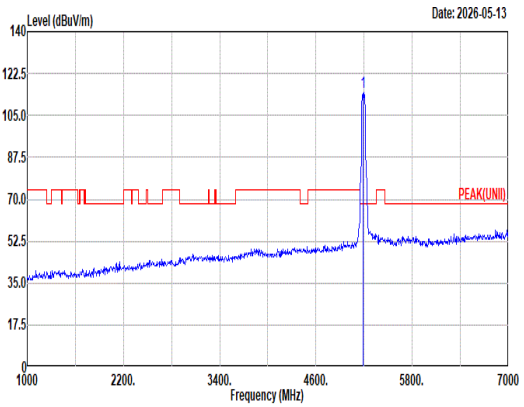

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5190.00	114.89	------	------	106.05	33.02	12.72	36.90	0.00	200	316	Peak

Avg

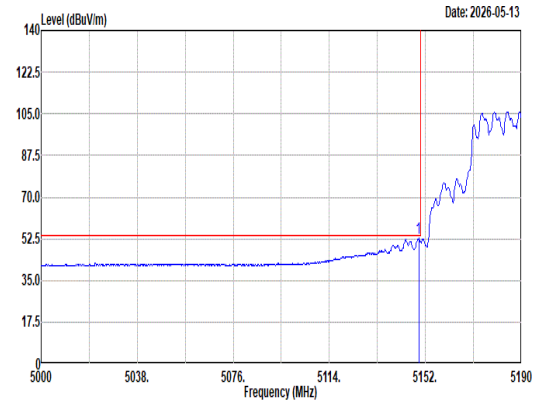

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:1.300kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5149.34	52.66	54.00	-1.34	43.69	33.20	12.67	36.90	0.00	200	316	Average

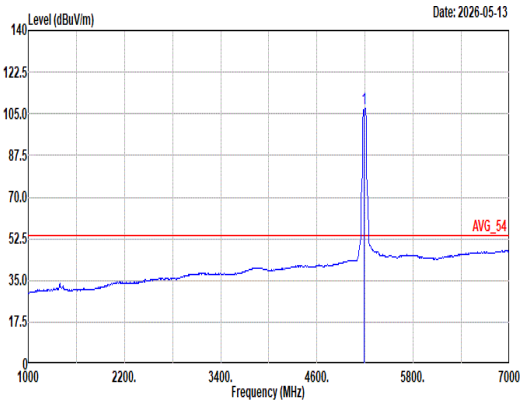

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:1.300kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5190.00	107.18	------	------	98.34	33.02	12.72	36.90	0.00	200	316	Average

<table>
<tr><td rowspan="3">Mode</td><td colspan="2">7</td></tr>
<tr><td colspan="2">Band Edge - R</td></tr>
<tr><td colspan="2">U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full RU_5190MHz</td></tr>
<tr><td>ANT</td><td colspan="2">DB 1+2+3+4 (CDD)</td></tr>
<tr><td>Pol.</td><td>Vertical</td><td>Fundamental</td></tr>
<tr><td>Peak</td><td> 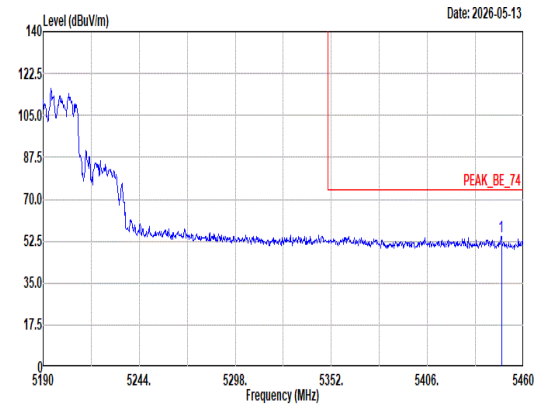

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5447.58	54.38	74.00	-19.62	45.38	32.80	13.10	36.90	0.00	200	316	Peak |</td><td>Blank</td></tr>
<tr><td>Avg</td><td> 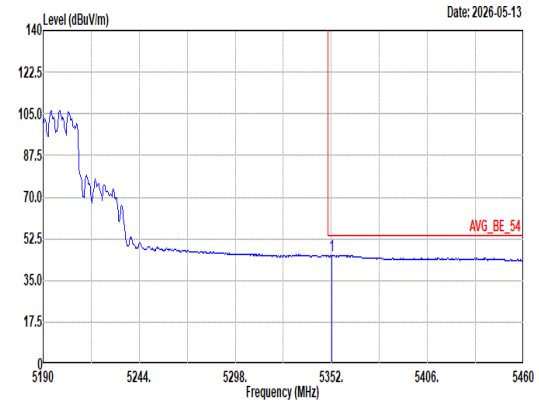

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:1.300kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5352.27	45.57	54.00	-8.43	36.58	32.90	12.99	36.90	0.00	200	316	Average |</td><td>Blank</td></tr>
</table>

Mode	7	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full RU_5190MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical

Peak

Avg

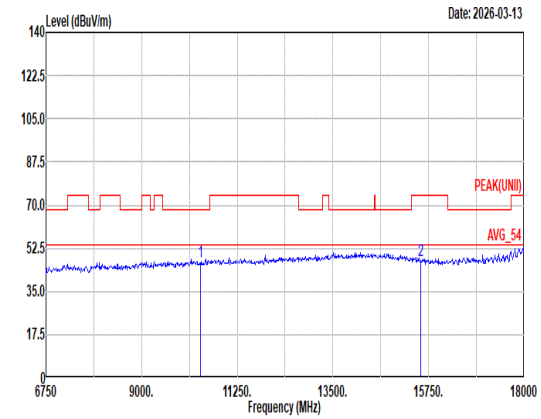

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10380.00	46.94	68.20	-21.26	48.21	38.60	18.26	58.84	0.71	--	--	Peak
2	15570.00	47.57	74.00	-26.43	44.65	38.20	22.69	58.45	0.48	--	--	Peak

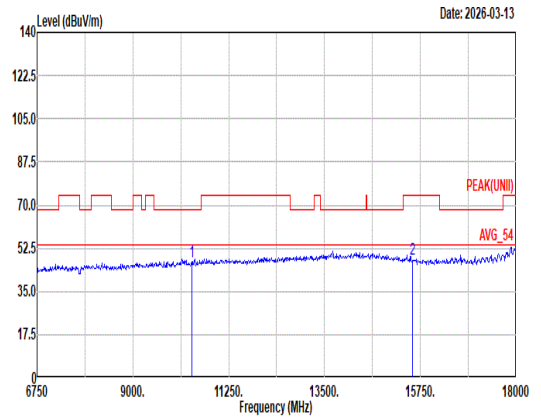

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10380.00	47.06	68.20	-21.14	48.33	38.60	18.26	58.84	0.71	--	--	Peak
2	15570.00	47.98	74.00	-26.02	45.06	38.20	22.69	58.45	0.48	--	--	Peak

Mode	7	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full RU_5190MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	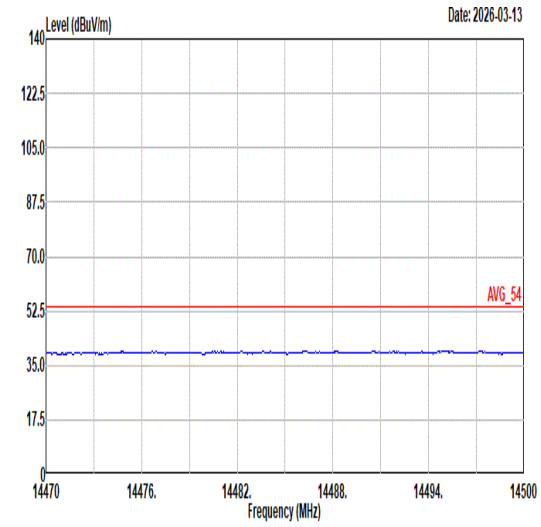 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	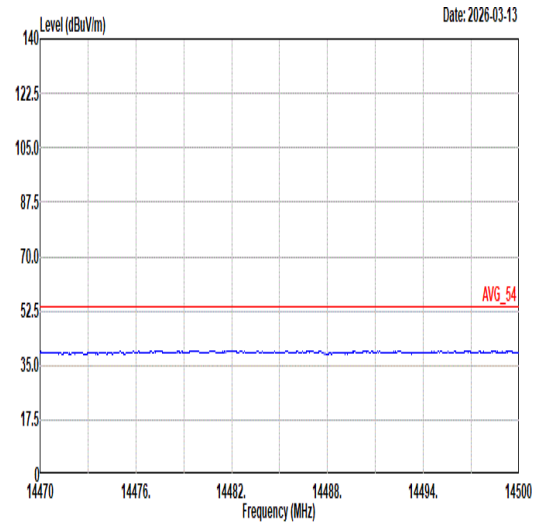 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	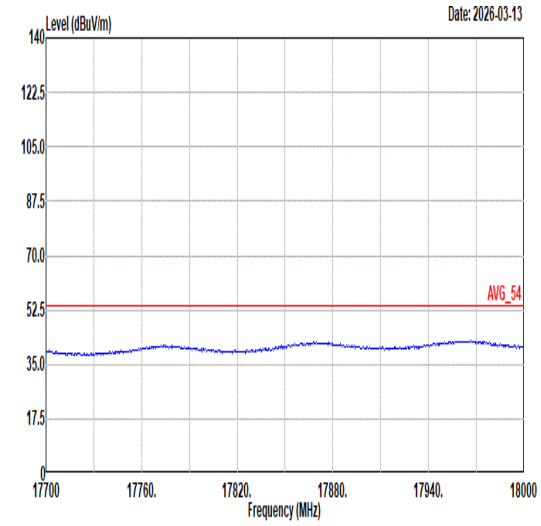 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	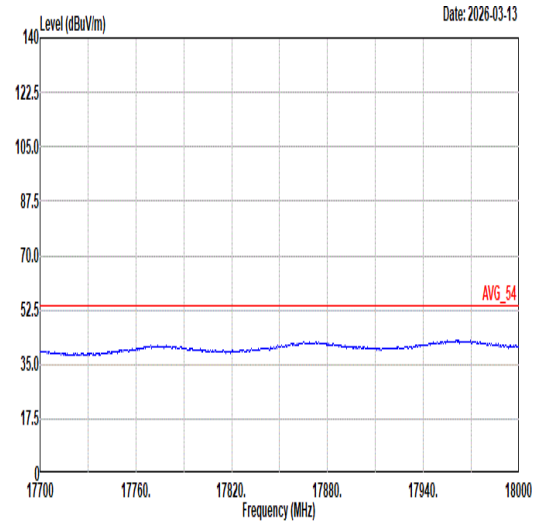 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL

Mode	8
	Band Edge - L
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full RU_5230MHz
ANT	DB 1+2+3+4 (CDD)

Pol.	Horizontal	Fundamental
Peak	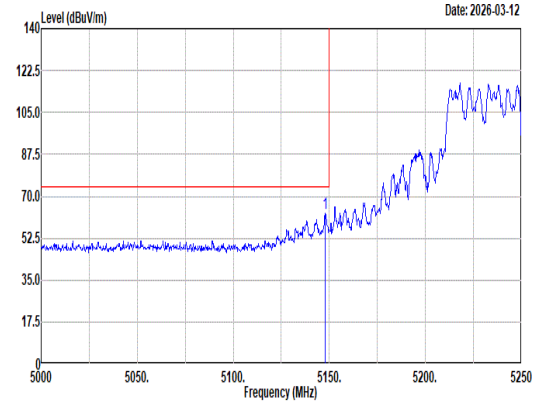 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.00 62.87 74.00 -11.13 53.92 33.19 12.66 36.90 0.00 300 79 Peak	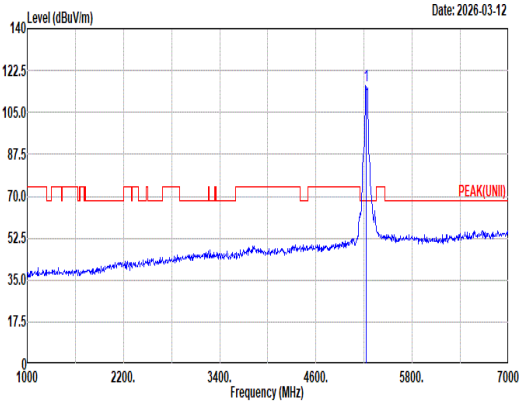 Site : 03CH15-HY Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5230.00 116.03 ------ ------ 107.20 32.98 12.75 36.90 0.00 300 79 Peak
Avg	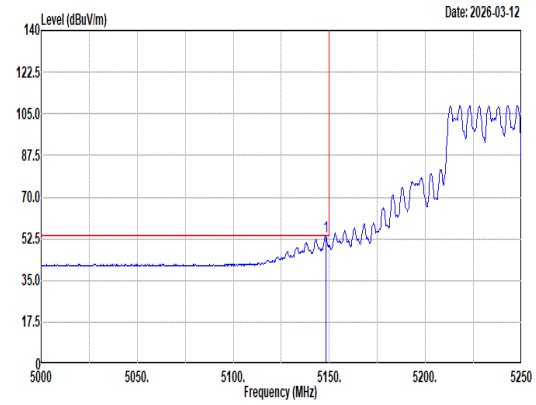 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:1.300kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.25 53.33 54.00 -0.67 44.37 33.19 12.67 36.90 0.00 300 79 Average	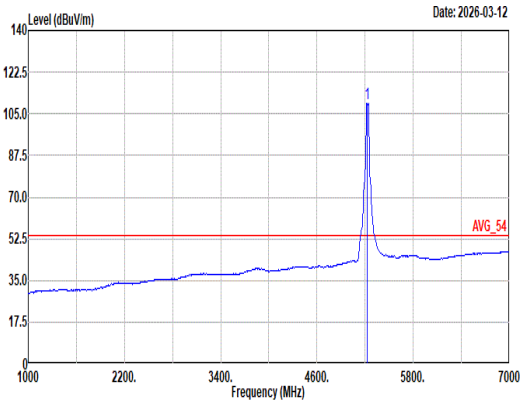 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:1.300kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5230.00 109.19 ------ ------ 100.37 32.94 12.78 36.90 0.00 300 79 Average

Mode	8	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full RU_5230MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Fundamental
Peak	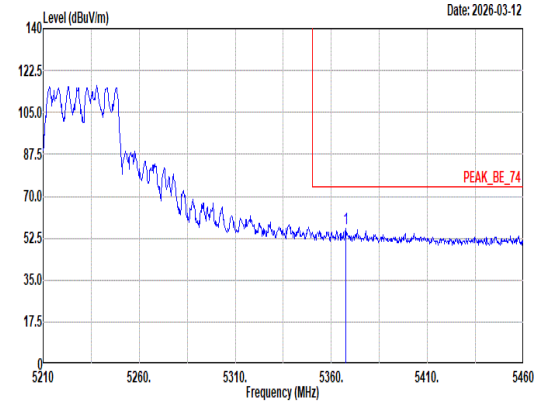 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5367.50 56.36 74.00 -17.64 47.38 32.87 13.01 36.90 0.00 300 79 Peak	Blank
Avg	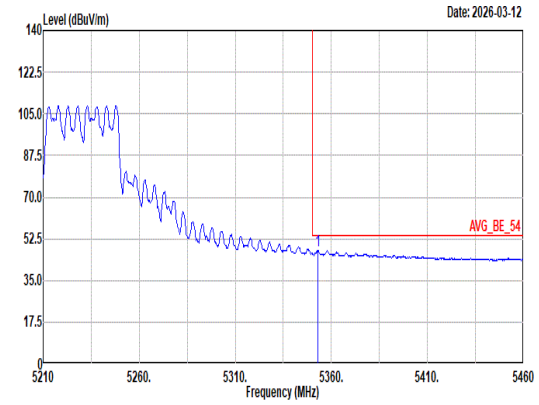 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:1.300kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.00 47.54 54.00 -6.46 38.56 32.89 12.99 36.90 0.00 300 79 Average	Blank

Mode	8
	Band Edge - L
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full RU_5230MHz
ANT	DB 1+2+3+4 (CDD)

Pol.	Vertical	Fundamental
Peak	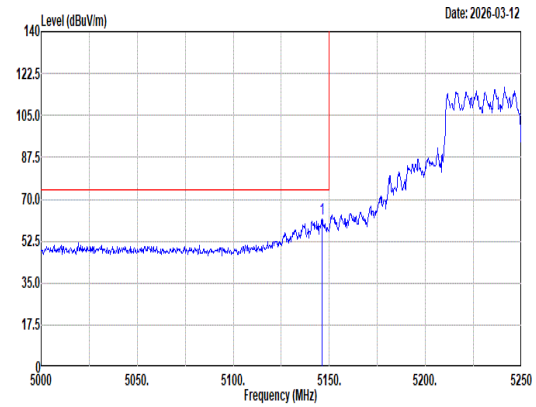 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5146.25 61.82 74.00 -12.18 52.87 33.19 12.66 36.90 0.00 201 360 Peak	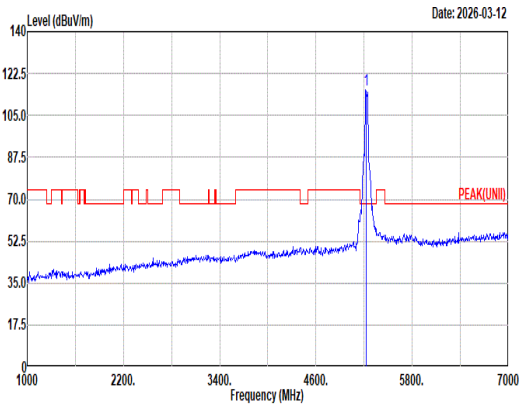 Site : 03CH15-HY Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5230.00 115.49 ------ ------ 106.67 32.96 12.76 36.90 0.00 201 360 Peak
Avg	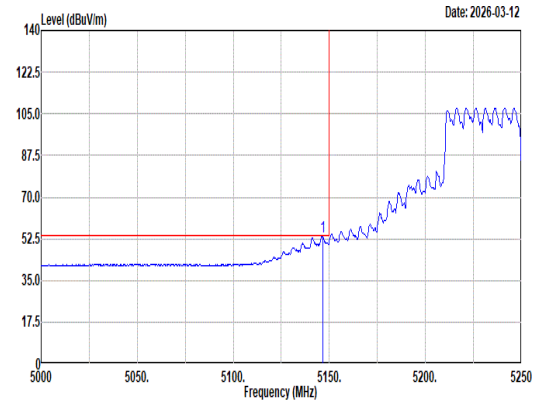 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:1.300kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5146.50 53.46 54.00 -0.54 44.51 33.19 12.66 36.90 0.00 201 360 Average	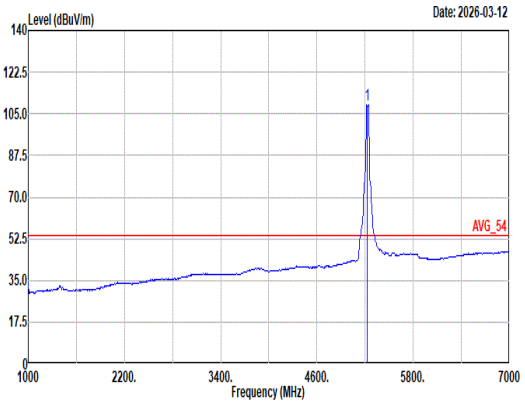 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:1.300kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5230.00 108.57 ------ ------ 99.75 32.96 12.76 36.90 0.00 201 360 Average

Mode	8	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full RU_5230MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Vertical	Fundamental
Peak	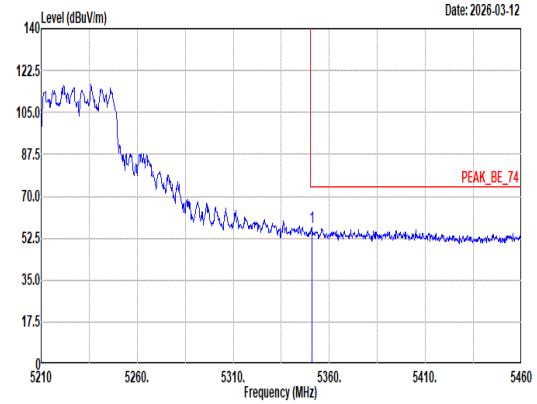 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.00 57.01 74.00 -16.99 48.02 32.90 12.99 36.90 0.00 201 360 Peak	Blank
Avg	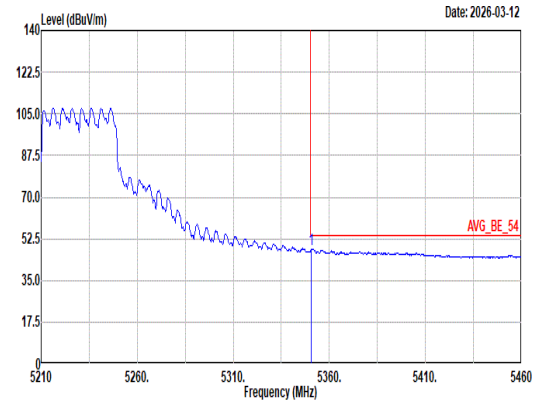 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:1.300kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.50 47.98 54.00 -6.02 38.99 32.90 12.99 36.90 0.00 201 360 Average	Blank

Mode	8	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full RU_5230MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical

Peak

Avg

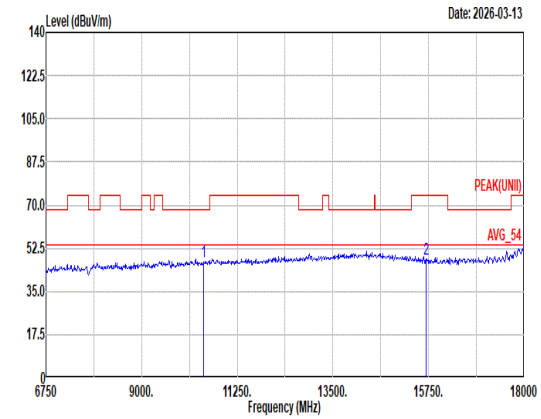

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10460.00	46.84	68.20	-21.36	47.96	38.66	18.34	58.82	0.70	--	--	Peak
2	15690.00	47.93	74.00	-26.07	45.18	38.02	22.78	58.52	0.47	--	--	Peak

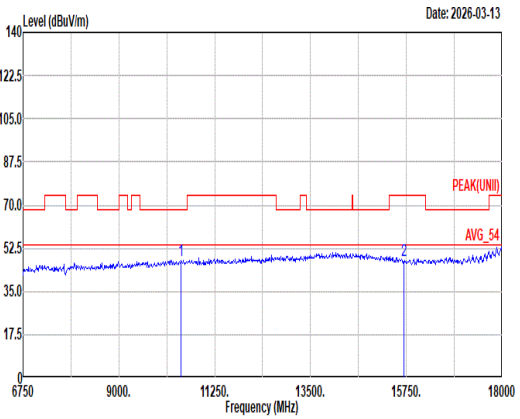

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10460.00	47.52	68.20	-20.68	48.64	38.66	18.34	58.82	0.70	--	--	Peak
2	15690.00	47.33	74.00	-26.67	44.58	38.02	22.78	58.52	0.47	--	--	Peak

Mode	8	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full RU_5230MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	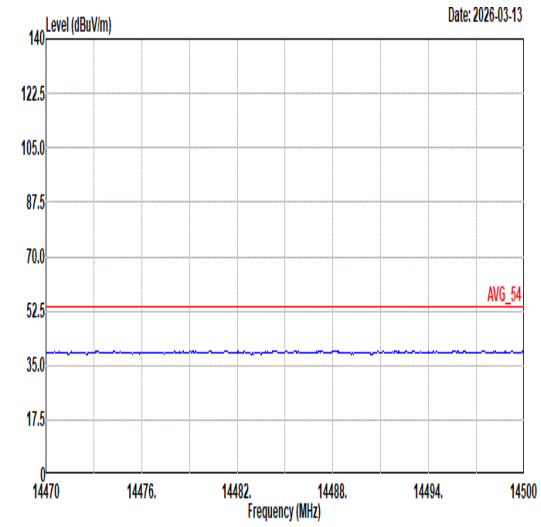 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	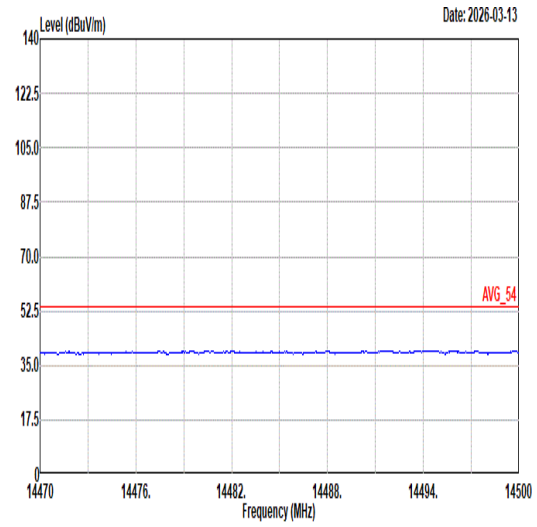 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	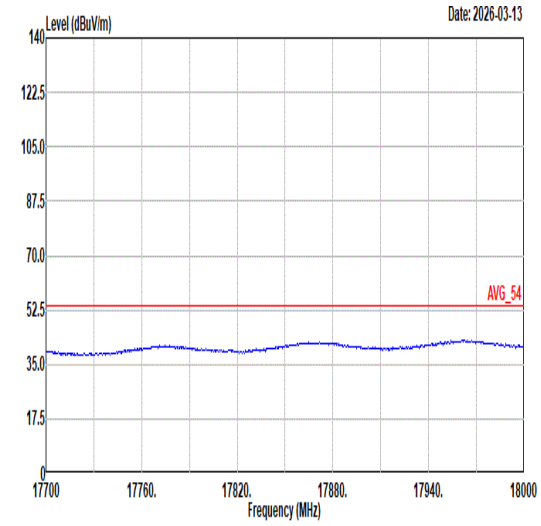 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	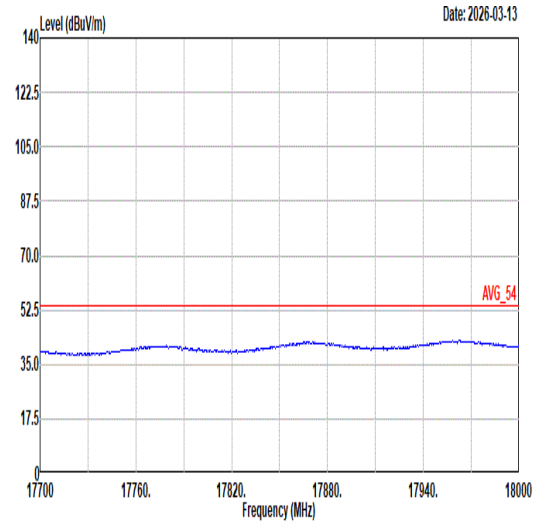 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL

Mode	9
	Band Edge - L
	U-NII-1_5.15-5.25_802.11be EHT80_CH42_Full RU_5210MHz
ANT	DB 1+2+3+4 (CDD)

Pol.	Horizontal	Fundamental
Peak	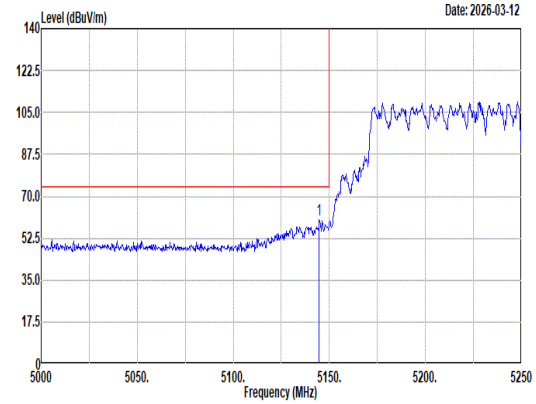	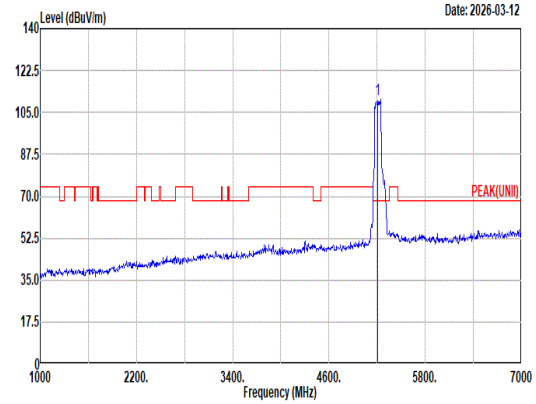
Avg	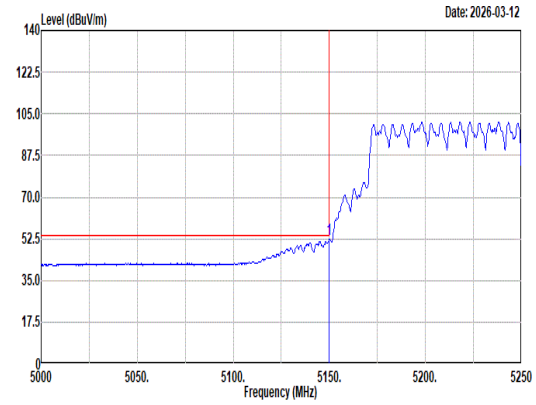	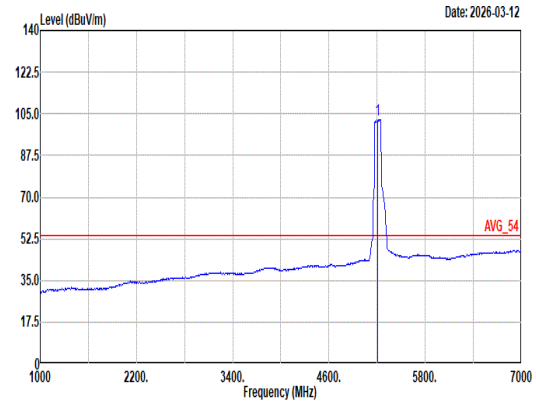

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5144.75	60.27	74.00	-13.73	51.33	33.18	12.66	36.90	0.00	205	83	Peak

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5210.00	110.42	------	------	101.61	32.90	12.81	36.90	0.00	205	83	Peak

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:2.700kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5150.00	52.41	54.00	-1.59	43.44	33.20	12.67	36.90	0.00	205	83	Average

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:2.700kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5210.00	102.60	------	------	93.78	32.95	12.77	36.90	0.00	205	83	Average

Mode	9	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11be EHT80_CH42_Full RU_5210MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Fundamental
Peak	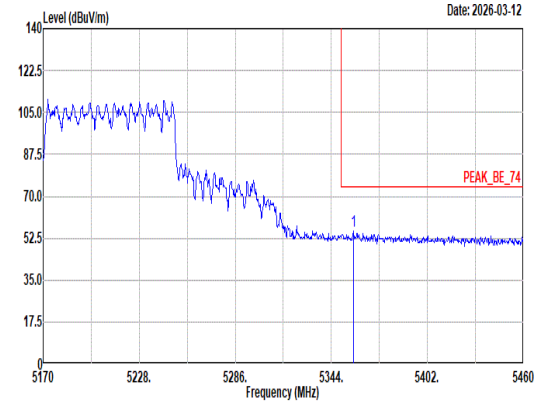 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5357.34 55.46 74.00 -18.54 46.47 32.89 13.00 36.90 0.00 205 83 Peak	Blank
Avg	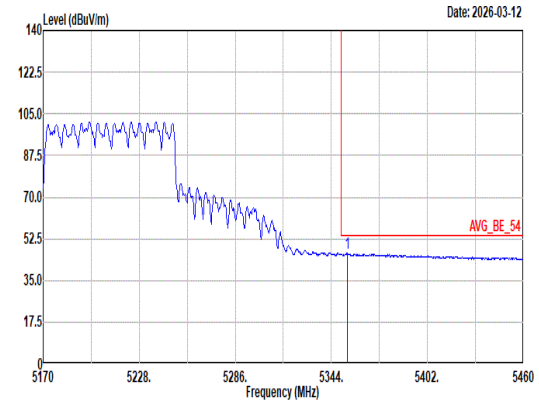 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.57 46.50 54.00 -7.50 37.52 32.89 12.99 36.90 0.00 205 83 Average	Blank

Mode	9
	Band Edge - L
	U-NII-1_5.15-5.25_802.11be EHT80_CH42_Full RU_5210MHz
ANT	DB 1+2+3+4 (CDD)

Pol.	Vertical	Fundamental
Peak	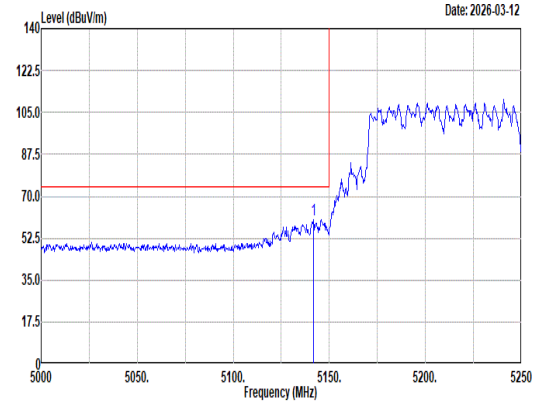	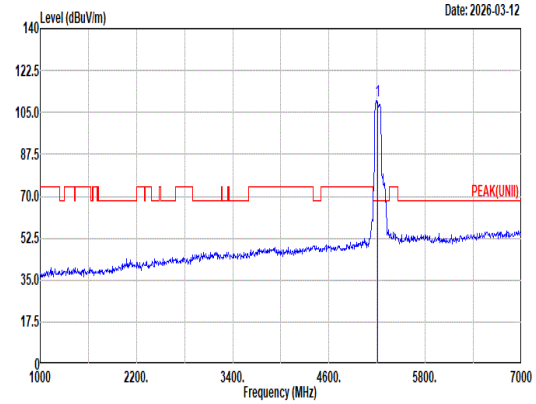
Avg	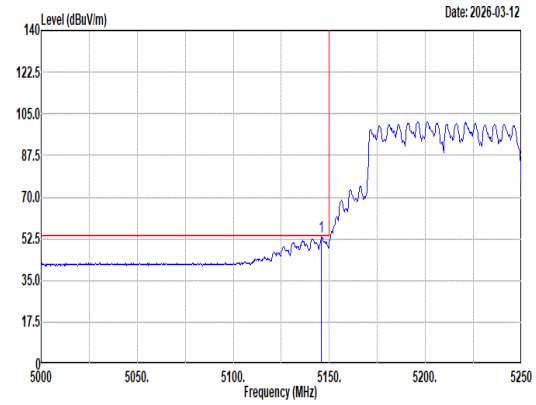	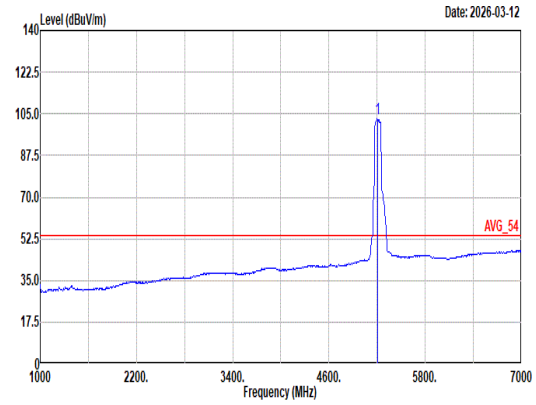

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5141.75	60.12	74.00	-13.88	51.19	33.17	12.66	36.90	0.00	221	360	Peak

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5210.00	110.07	------	------	101.23	33.02	12.72	36.90	0.00	221	360	Peak

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:2.700kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5146.00	53.26	54.00	-0.74	44.32	33.18	12.66	36.90	0.00	221	360	Average

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:2.700kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5210.00	102.77	------	------	93.94	33.00	12.73	36.90	0.00	221	360	Average

Mode	9	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11be EHT80_CH42_Full RU_5210MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Vertical	Fundamental
Peak	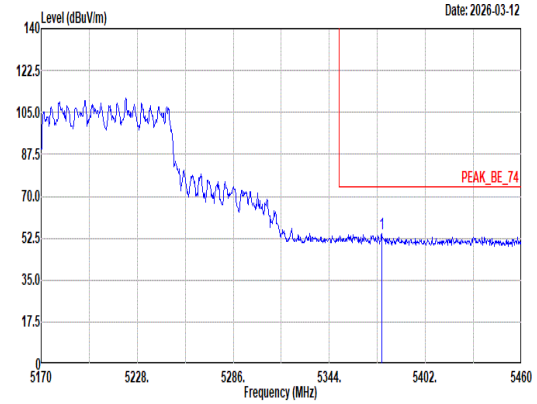 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5375.61 54.26 74.00 -19.74 45.28 32.85 13.03 36.90 0.00 221 360 Peak	Blank
Avg	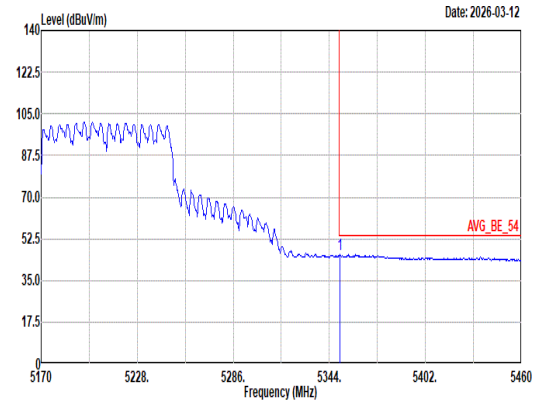 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.38 45.85 54.00 -8.15 36.86 32.90 12.99 36.90 0.00 221 360 Average	Blank

Mode	9	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT80_CH42_Full RU_5210MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical

Peak

Avg

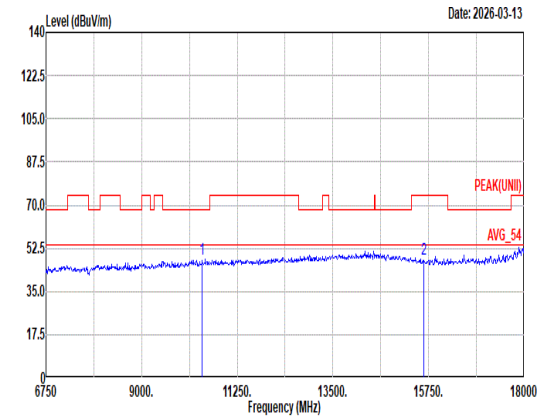

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10420.00	47.87	68.20	-20.33	49.07	38.62	18.30	58.83	0.71	--	--	Peak
2	15630.00	47.99	74.00	-26.01	45.12	38.14	22.73	58.48	0.48	--	--	Peak

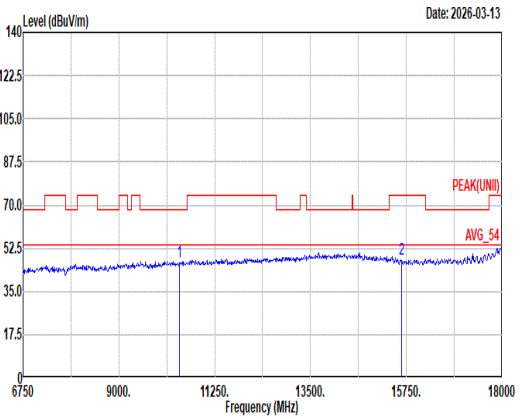

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10420.00	46.77	68.20	-21.43	47.97	38.62	18.30	58.83	0.71	--	--	Peak
2	15630.00	48.08	74.00	-25.92	45.21	38.14	22.73	58.48	0.48	--	--	Peak

Mode	9	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT80_CH42_Full RU_5210MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	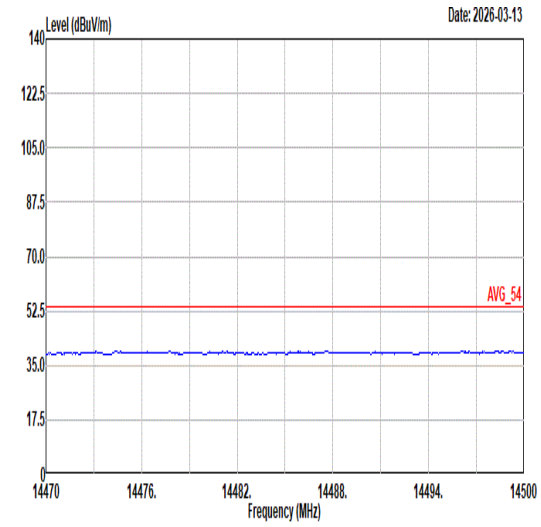 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	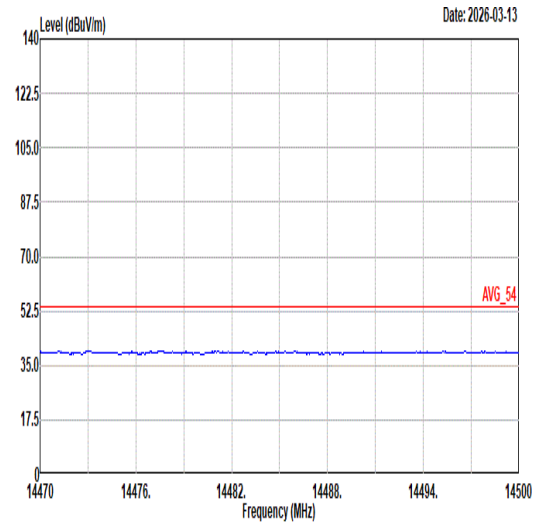 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	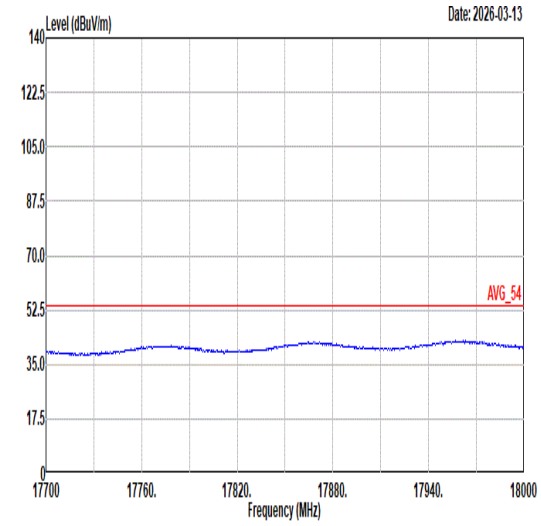 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	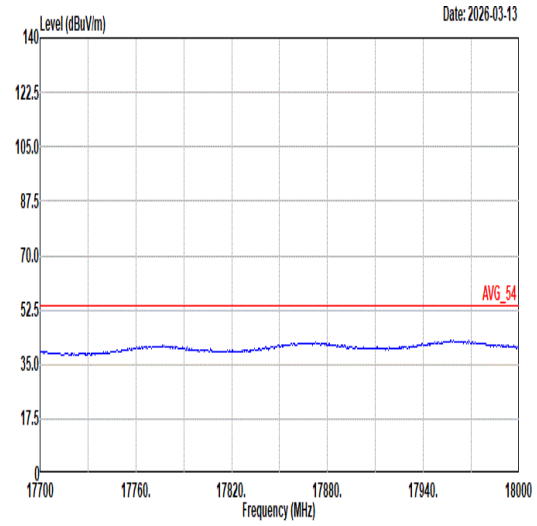 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL

Mode	10	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Fundamental

Peak

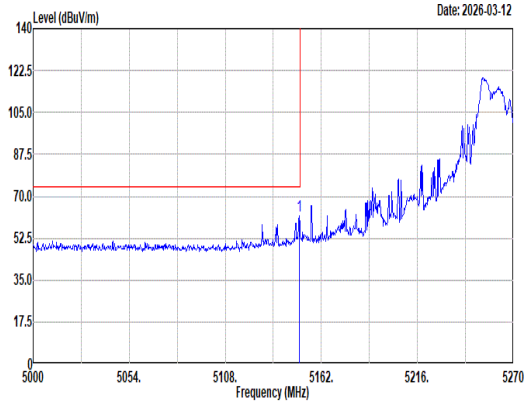

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5149.58	61.64	74.00	-12.36	52.67	33.20	12.67	36.90	0.00	176	96	Peak

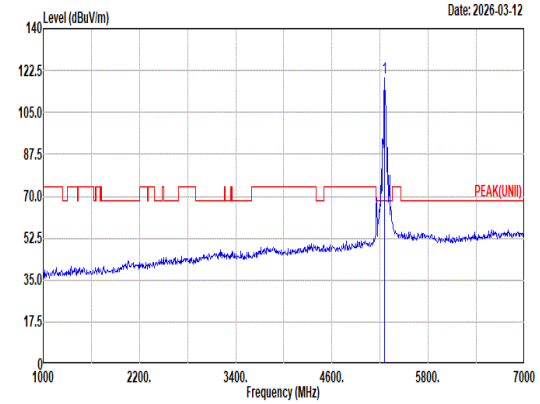

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5260.00	119.66	------	------	110.85	32.89	12.82	36.90	0.00	176	96	Peak

Avg

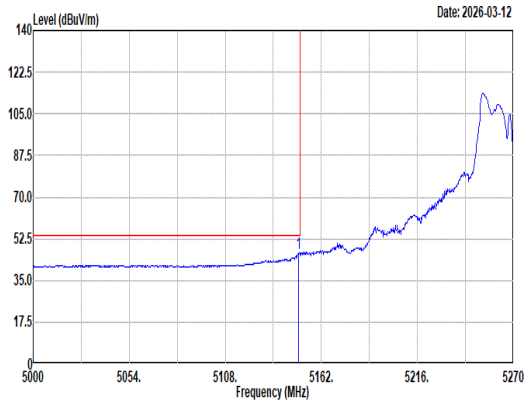

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:0.510kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5149.31	46.61	54.00	-7.39	37.64	33.20	12.67	36.90	0.00	176	96	Average

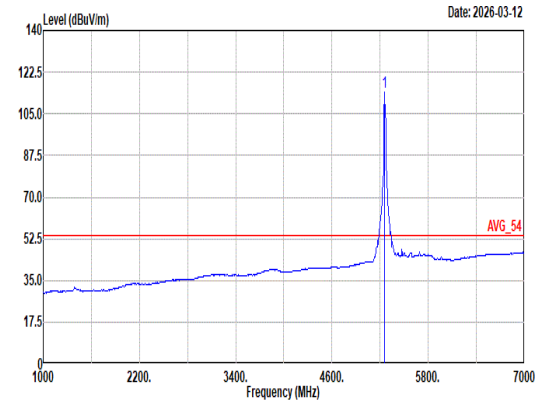

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:0.510kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5260.00	114.26	------	------	105.45	32.89	12.82	36.90	0.00	176	96	Average

Mode	10	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Fundamental
Peak	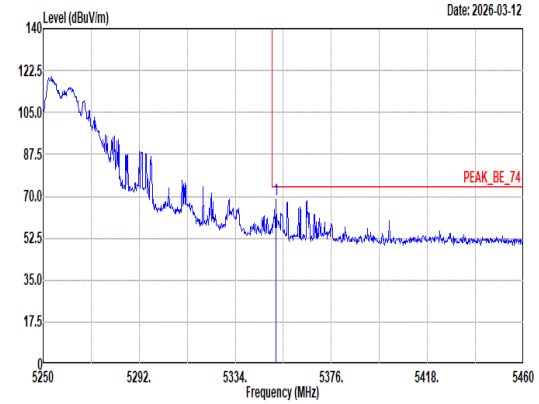 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.85 68.44 74.00 -5.56 59.45 32.90 12.99 36.90 0.00 176 96 Peak	Blank
Avg	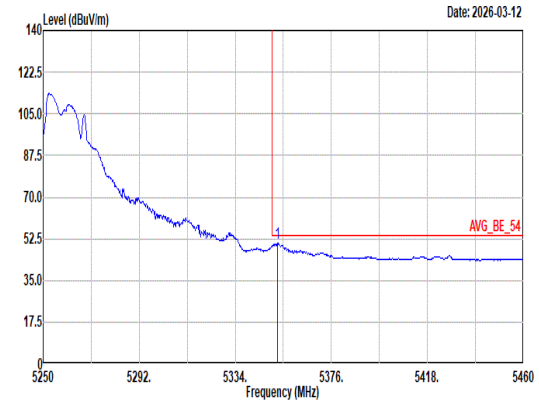 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.510kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.48 50.76 54.00 -3.24 41.77 32.90 12.99 36.90 0.00 176 96 Average	Blank

Mode	10	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Vertical	Fundamental

Peak

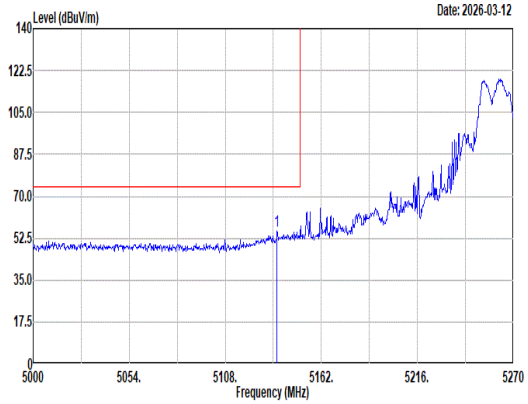

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5137.16	55.50	74.00	-18.50	46.60	33.15	12.65	36.90	0.00	234	0	Peak

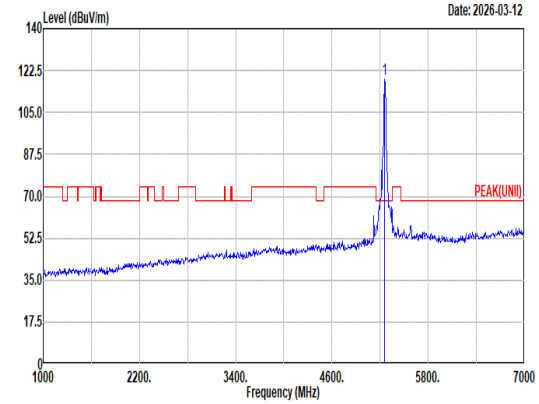

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5260.00	118.99	------	------	110.18	32.89	12.82	36.90	0.00	234	0	Peak

Avg

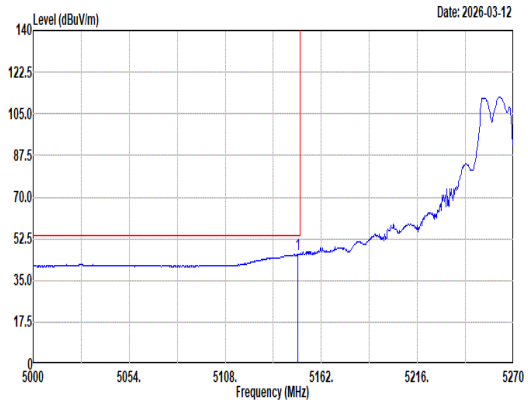

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:0.510kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5148.77	46.02	54.00	-7.98	37.05	33.20	12.67	36.90	0.00	234	0	Average

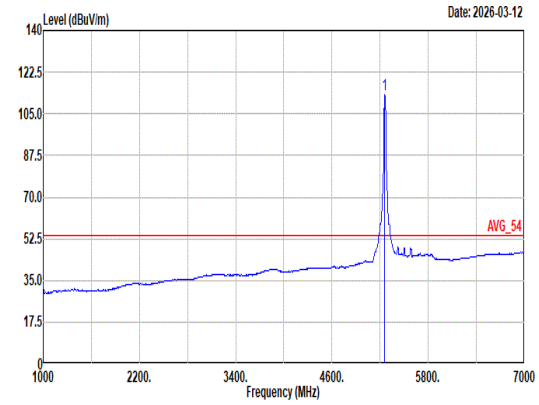

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:0.510kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5260.00	112.89	------	------	104.08	32.88	12.83	36.90	0.00	234	0	Average

Mode	10	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Vertical	Fundamental
Peak	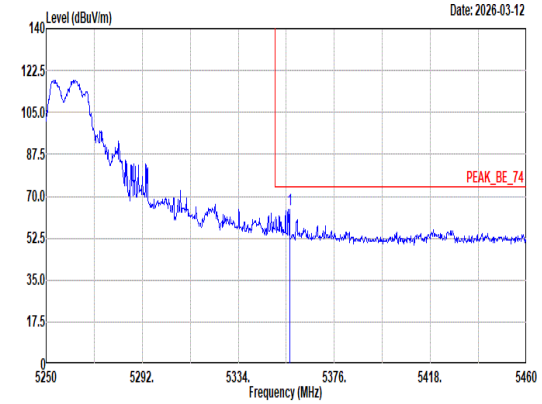 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5356.47 64.22 74.00 -9.78 55.23 32.89 13.00 36.90 0.00 234 0 Peak	Blank
Avg	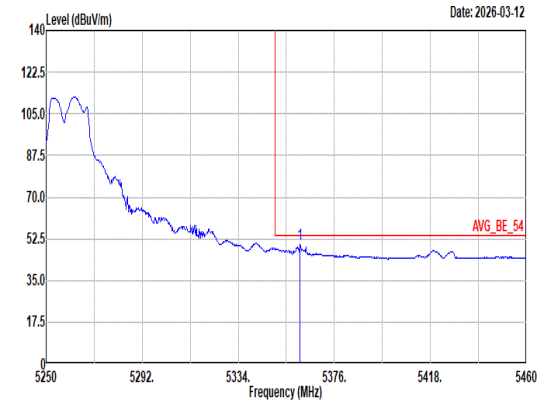 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.510kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5361.09 50.07 54.00 -3.93 41.09 32.88 13.00 36.90 0.00 234 0 Average	Blank

Mode	10	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical

Peak

Avg

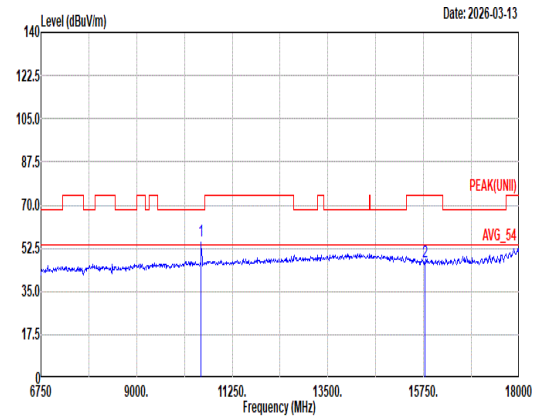

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10520.00	55.38	68.20	-12.82	56.31	38.76	18.40	58.79	0.70	224	43	Peak
2	15780.00	47.16	74.00	-26.84	44.58	37.84	22.84	58.57	0.47	--	--	Peak

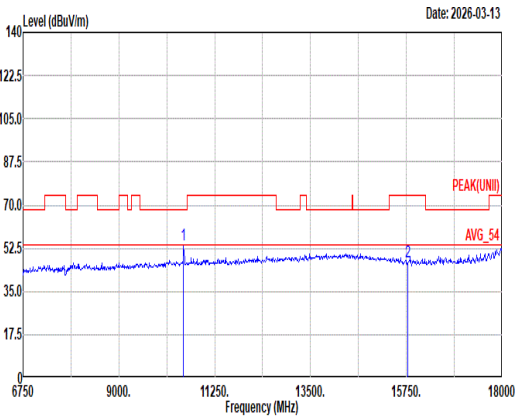

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10520.00	53.85	68.20	-14.35	54.78	38.76	18.40	58.79	0.70	200	96	Peak
2	15780.00	47.01	74.00	-26.99	44.43	37.84	22.84	58.57	0.47	--	--	Peak

Mode	10	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	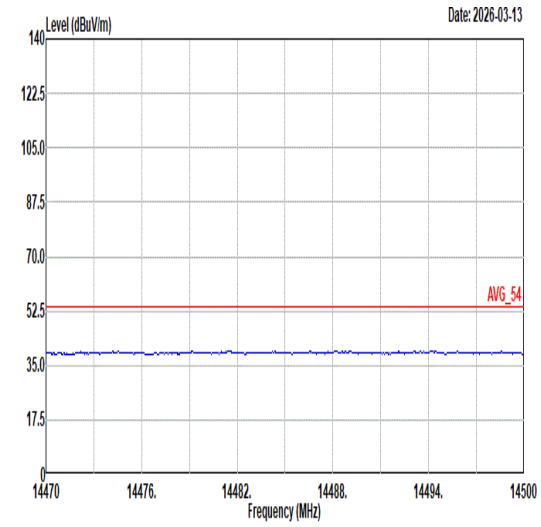 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	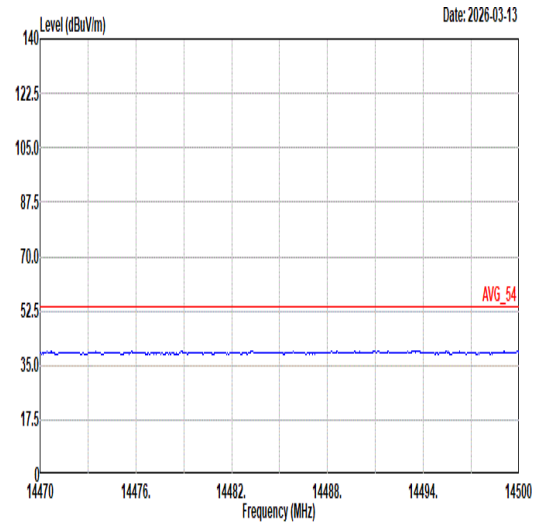 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	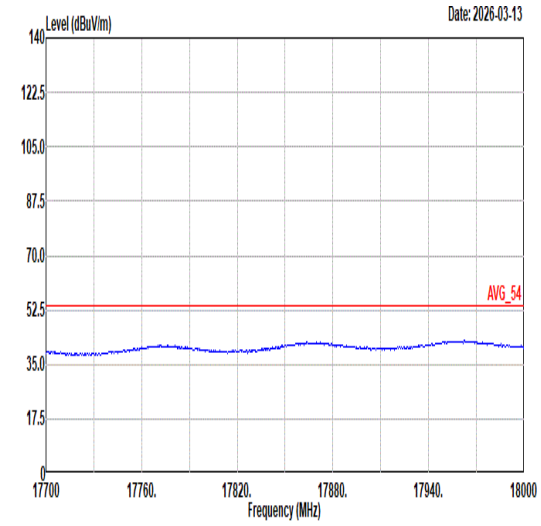 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	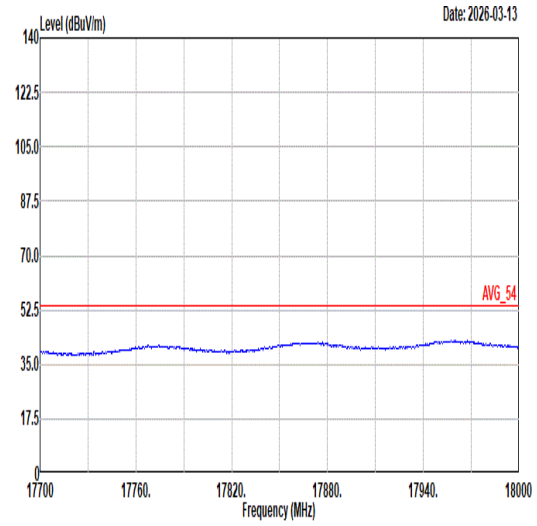 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL

Mode	11
	Band Edge - L
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz
ANT	DB 1+2+3+4 (CDD)

Pol.	Horizontal	Fundamental

Peak

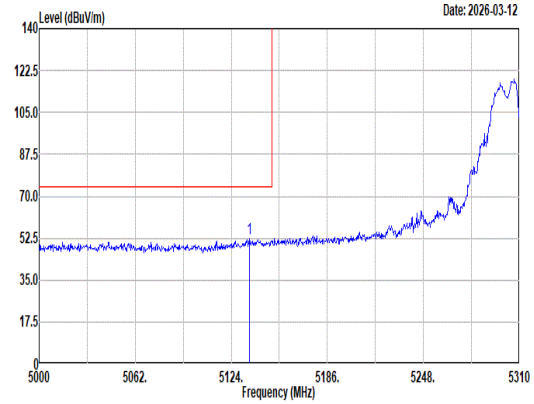

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5135.78	52.31	74.00	-21.69	43.42	33.14	12.65	36.90	0.00	200	81	Peak

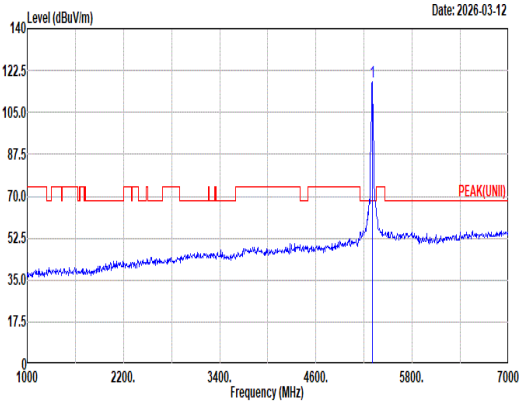

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5300.00	117.78	------	------	108.95	32.82	12.91	36.90	0.00	200	81	Peak

Avg

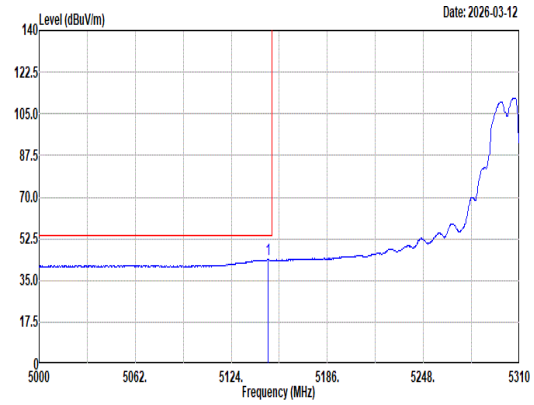

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:0.510kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5147.87	43.82	54.00	-10.18	34.87	33.19	12.66	36.90	0.00	200	81	Average

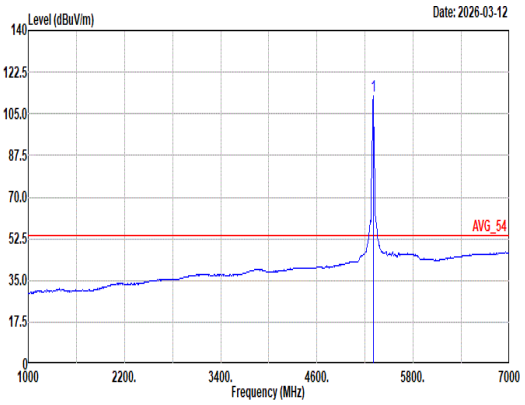

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:0.510kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5300.00	112.71	------	------	103.88	32.82	12.91	36.90	0.00	200	81	Average

Mode	11	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Fundamental
Peak	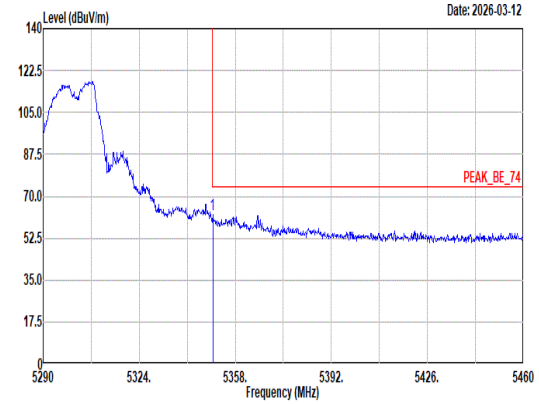 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.01 62.28 74.00 -11.72 53.29 32.90 12.99 36.90 0.00 200 81 Peak	Blank
Avg	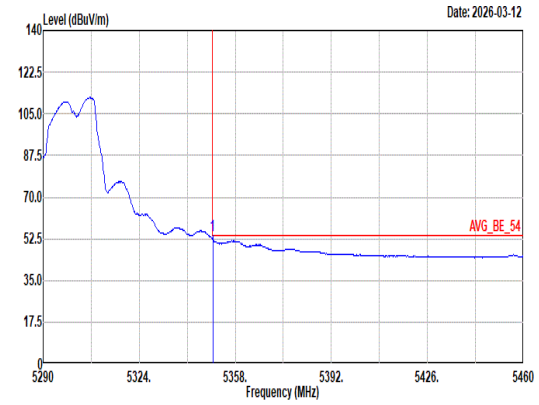 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.510kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.01 53.71 54.00 -0.29 44.72 32.90 12.99 36.90 0.00 200 81 Average	Blank

Mode	11
	Band Edge - L
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz
ANT	DB 1+2+3+4 (CDD)

Pol.	Vertical	Fundamental

Peak

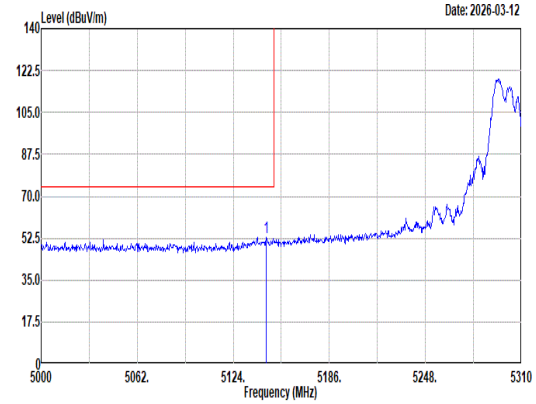

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5145.39	52.87	74.00	-21.13	43.93	33.18	12.66	36.90	0.00	200	132	Peak

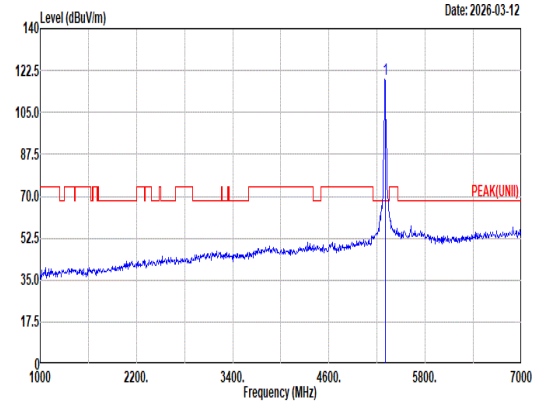

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5300.00	118.71	------	------	109.91	32.81	12.89	36.90	0.00	200	132	Peak

Avg

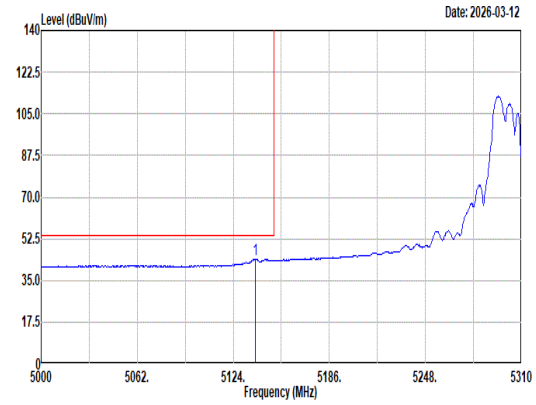

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:0.510kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5138.26	43.95	54.00	-10.05	35.05	33.15	12.65	36.90	0.00	200	132	Average

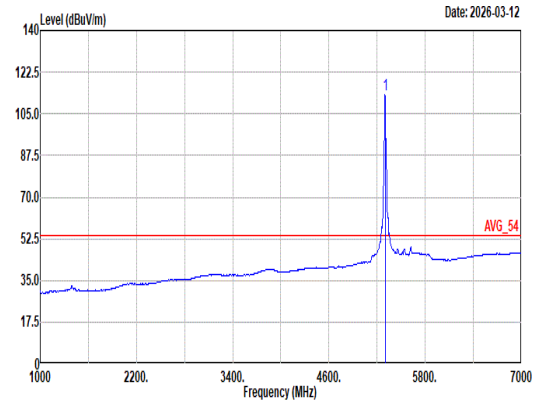

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:0.510kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5300.00	113.20	------	------	104.40	32.81	12.89	36.90	0.00	200	132	Average

Mode	11	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Vertical	Fundamental
Peak	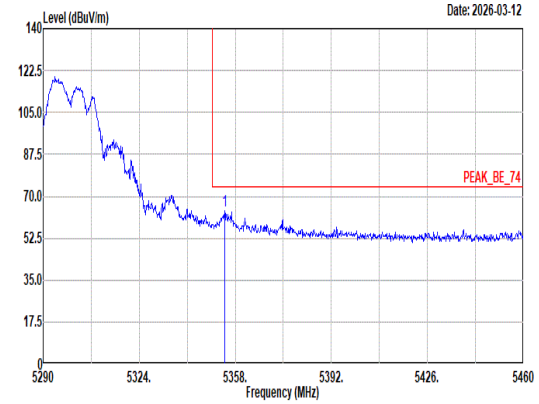 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5354.26 64.18 74.00 -9.82 55.20 32.89 12.99 36.90 0.00 200 132 Peak	Blank
Avg	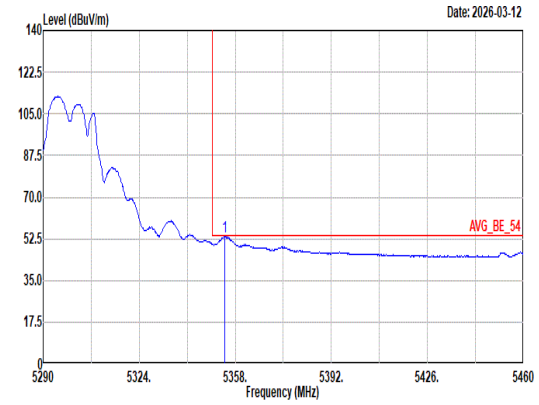 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.510kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5354.26 53.44 54.00 -0.56 44.46 32.89 12.99 36.90 0.00 200 132 Average	Blank

Mode	11	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical

Peak

Avg

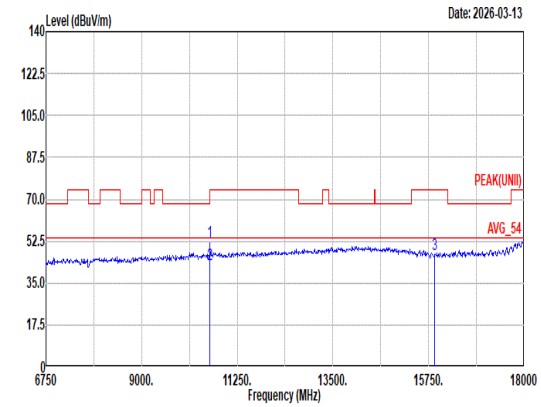

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10600.00	52.42	74.00	-21.58	52.98	39.00	18.48	58.73	0.69	242	54	Peak
2	10600.00	42.77	54.00	-11.23	43.33	39.00	18.48	58.73	0.69	242	54	Average
3	15900.00	47.27	74.00	-26.73	44.52	38.00	22.92	58.63	0.46	--	--	Peak

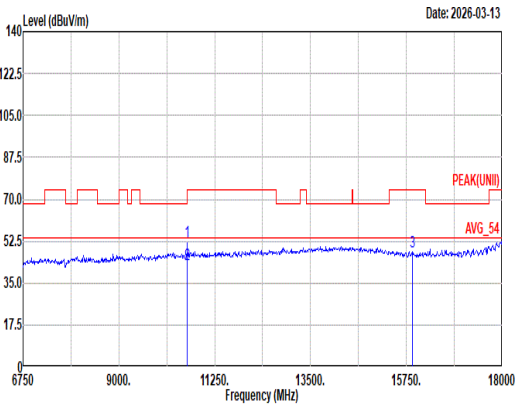

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10600.00	52.11	74.00	-21.89	52.67	39.00	18.48	58.73	0.69	188	97	Peak
2	10600.00	42.58	54.00	-11.42	43.14	39.00	18.48	58.73	0.69	188	97	Average
3	15900.00	47.85	74.00	-26.15	45.10	38.00	22.92	58.63	0.46	--	--	Peak

Mode	11	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	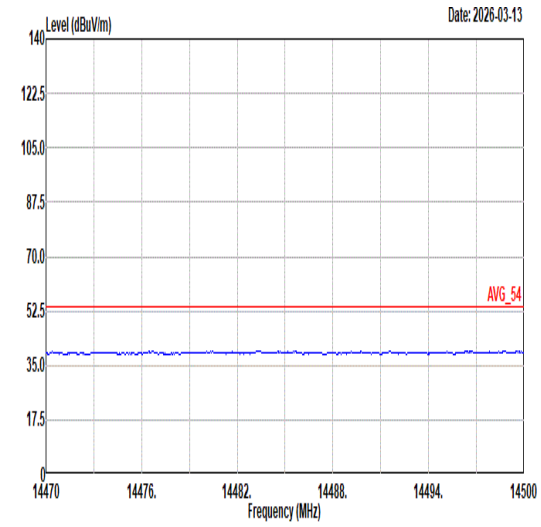 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	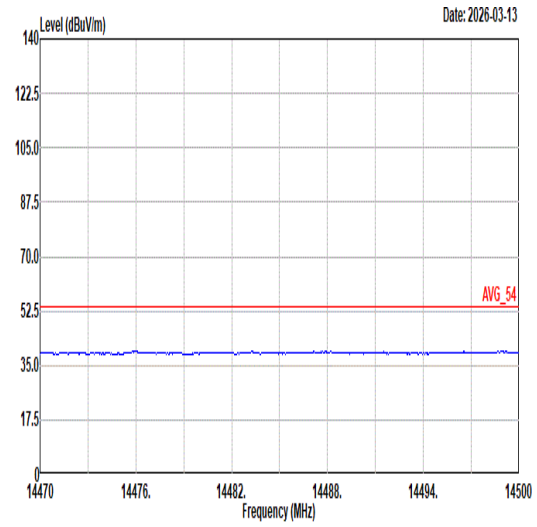 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	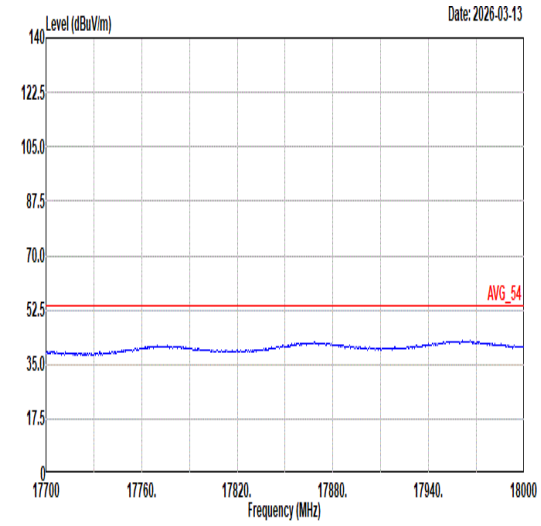 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	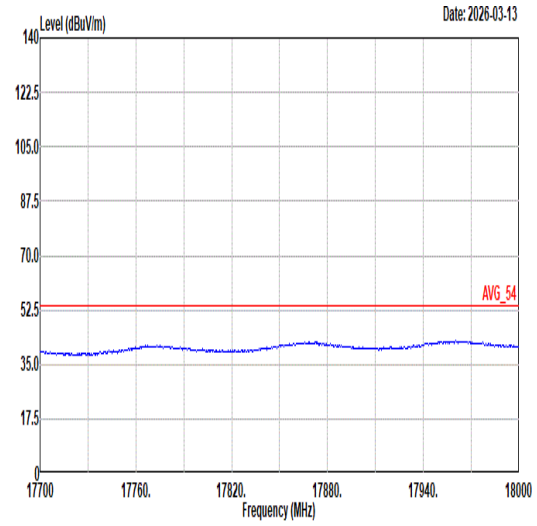 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL

Mode	12	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Fundamental

Peak

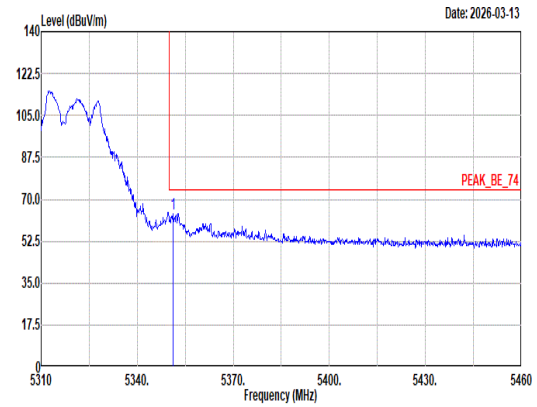

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5351.25	64.16	74.00	-9.84	55.17	32.90	12.99	36.90	0.00	300	63	Peak

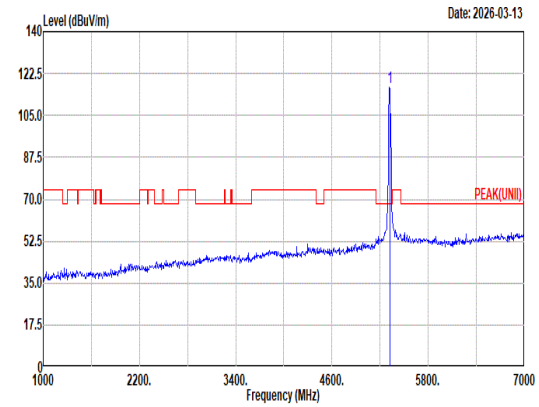

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5320.00	116.60	------	------	107.75	32.83	12.92	36.90	0.00	300	63	Peak

Avg

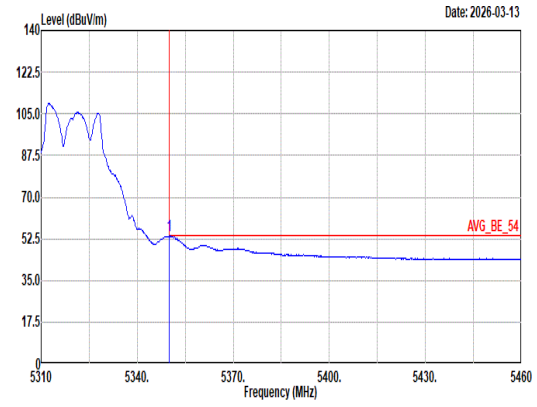

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:0.510kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5350.05	53.72	54.00	-0.28	44.73	32.90	12.99	36.90	0.00	300	63	Average

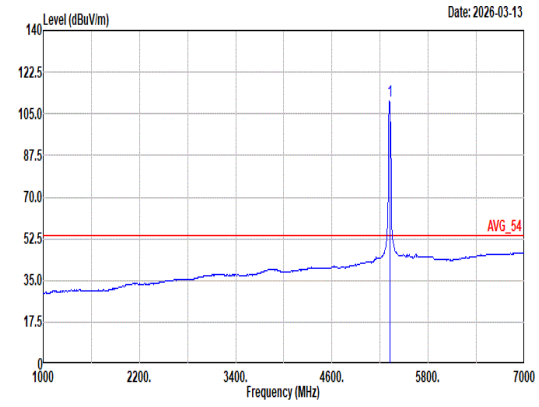

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:0.510kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5320.00	110.31	------	------	101.46	32.83	12.92	36.90	0.00	300	63	Average

Mode	12	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Vertical	Fundamental

Peak

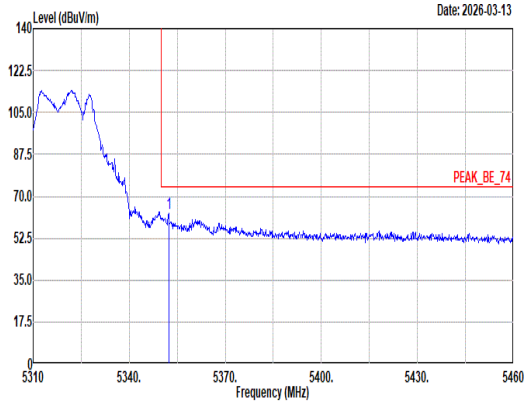

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5352.30	62.82	74.00	-11.18	53.83	32.90	12.99	36.90	0.00	300	326	Peak

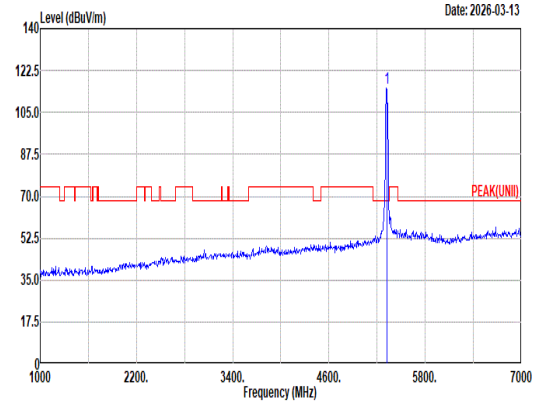

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5320.00	114.91	------	------	106.06	32.83	12.92	36.90	0.00	300	326	Peak

Avg

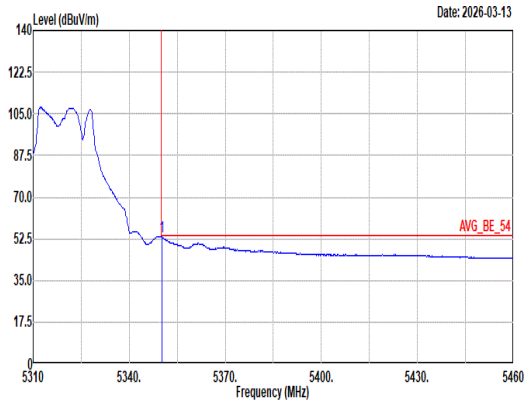

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:0.510kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5350.20	53.28	54.00	-0.72	44.29	32.90	12.99	36.90	0.00	300	326	Average

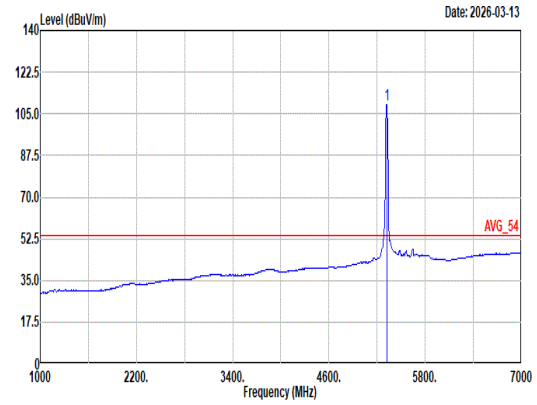

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:0.510kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5320.00	108.82	------	------	99.95	32.84	12.93	36.90	0.00	300	326	Average

Mode	12	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical
Peak Avg	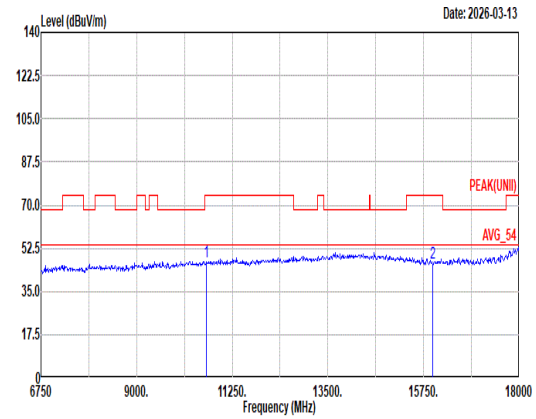 Site : 03CH15-HY Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10640.00 46.99 74.00 -27.01 47.41 39.08 18.52 58.70 0.68 -- -- Peak 2 15960.00 46.67 74.00 -27.33 44.16 37.76 22.96 58.67 0.46 -- -- Peak	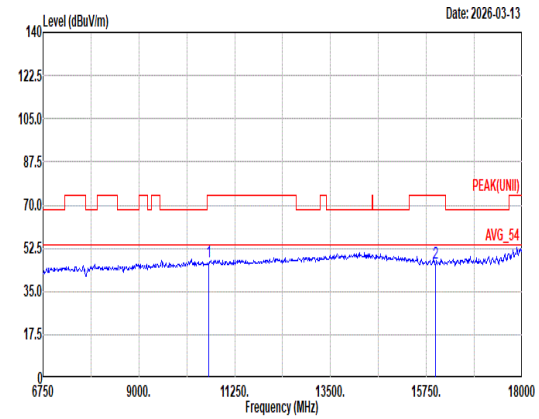 Site : 03CH15-HY Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10640.00 46.86 74.00 -27.14 47.28 39.08 18.52 58.70 0.68 -- -- Peak 2 15960.00 46.38 74.00 -27.62 43.87 37.76 22.96 58.67 0.46 -- -- Peak

Mode	12	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	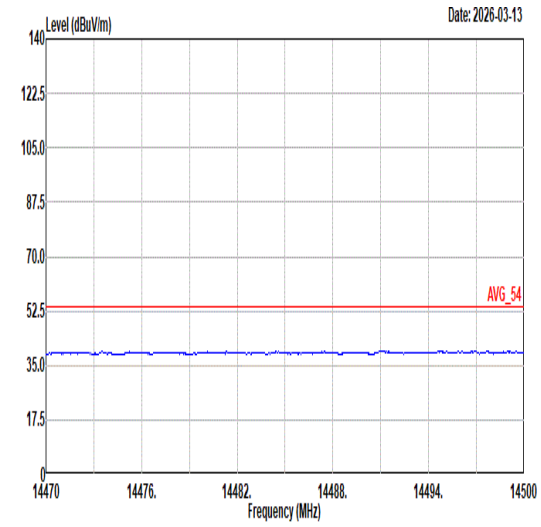 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	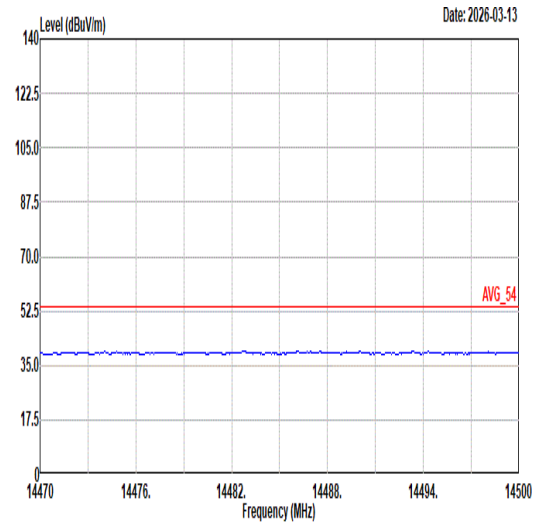 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	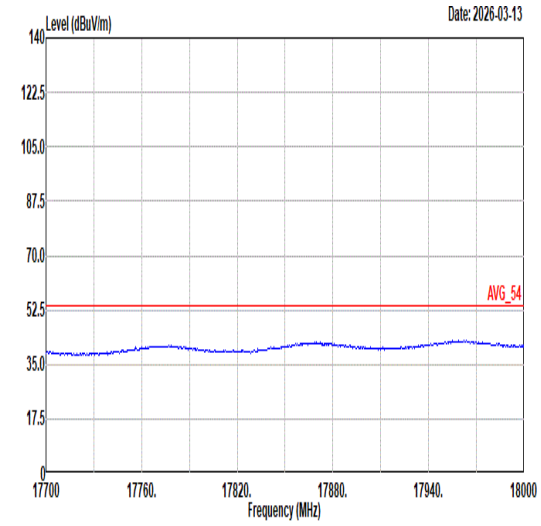 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	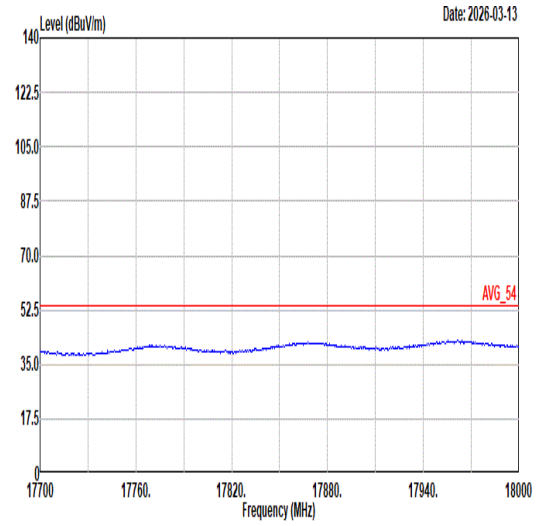 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL

Mode	13	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH52_Full RU_5260MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Fundamental

Peak

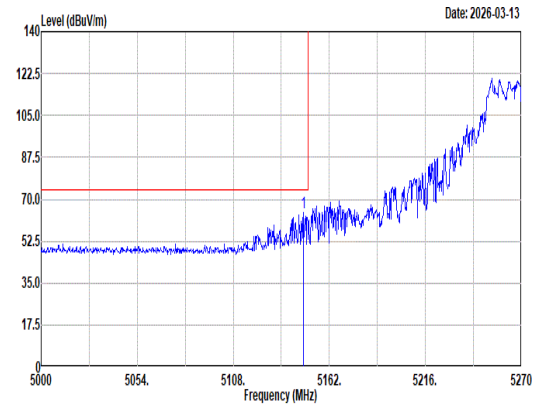

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5147.42	64.63	74.00	-9.37	55.68	33.19	12.66	36.90	0.00	200	81	Peak

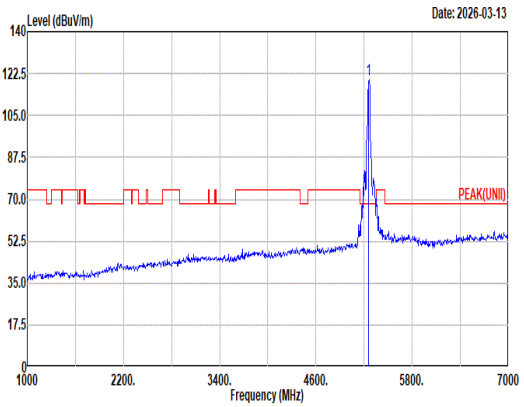

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5260.00	119.67	------	------	110.86	32.87	12.84	36.90	0.00	200	81	Peak

Avg

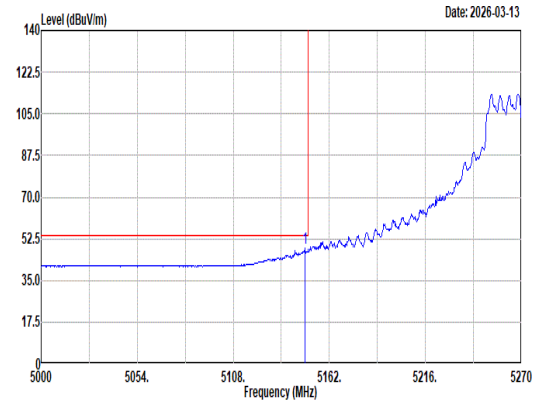

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:0.680kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5148.50	48.37	54.00	-5.63	39.41	33.19	12.67	36.90	0.00	200	81	Average

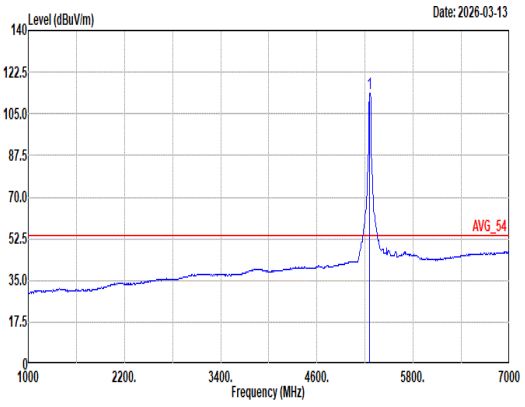

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:0.680kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5260.00	113.79	------	------	104.98	32.89	12.82	36.90	0.00	200	81	Average

Mode	13	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH52_Full RU_5260MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Fundamental
Peak	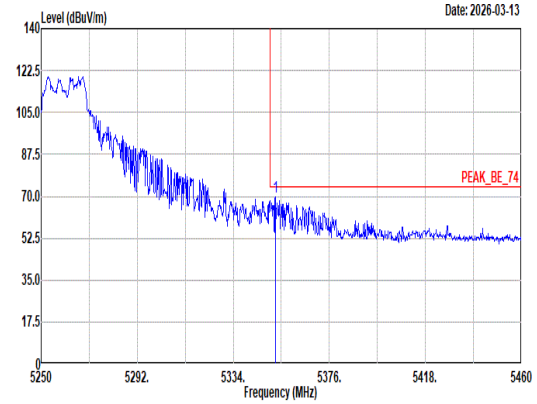 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.48 69.58 74.00 -4.42 60.59 32.90 12.99 36.90 0.00 200 81 Peak	Blank
Avg	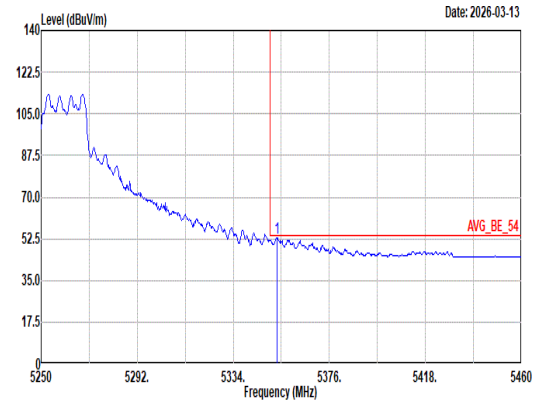 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.11 52.98 54.00 -1.02 44.00 32.89 12.99 36.90 0.00 200 81 Average	Blank

Mode	13	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH52_Full RU_5260MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Vertical	Fundamental

Peak

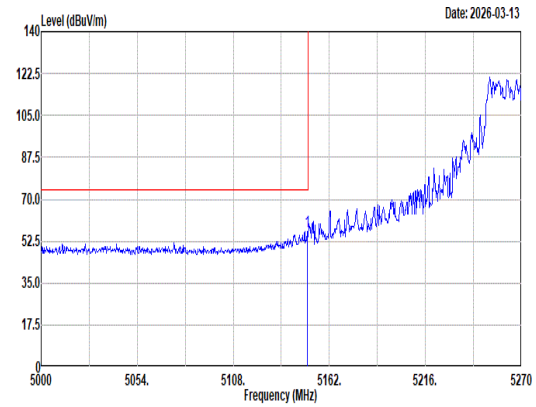

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5149.58	56.50	74.00	-17.50	47.53	33.20	12.67	36.90	0.00	200	132	Peak

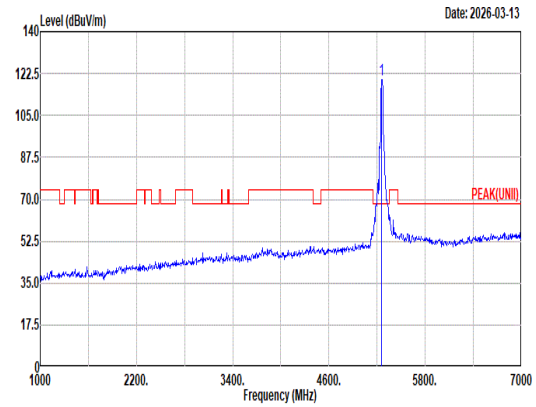

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5260.00	120.17	------	------	111.36	32.87	12.84	36.90	0.00	200	132	Peak

Avg

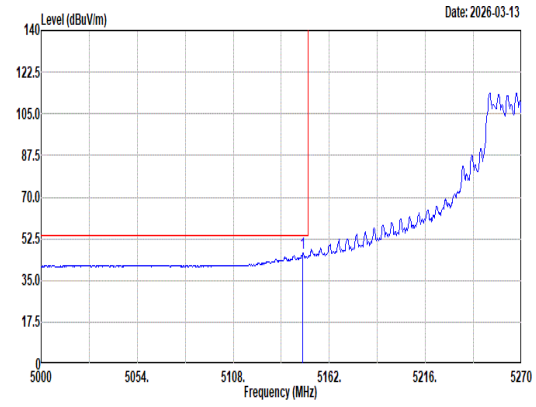

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:0.680kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5147.15	46.53	54.00	-7.47	37.58	33.19	12.66	36.90	0.00	200	132	Average

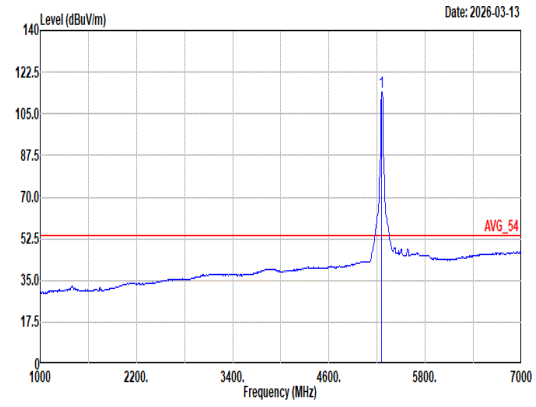

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:0.680kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5260.00	114.10	------	------	105.29	32.89	12.82	36.90	0.00	200	132	Average

Mode	13	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH52_Full RU_5260MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Vertical	Fundamental
Peak	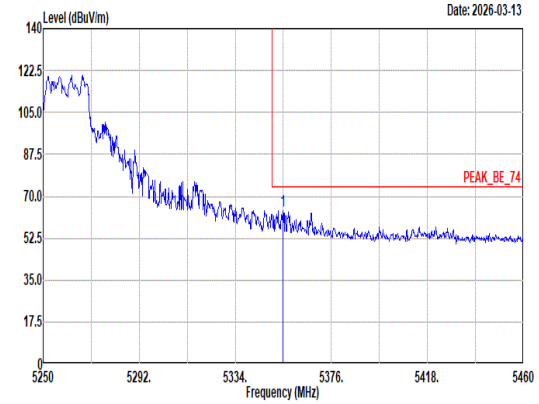 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5354.79 64.16 74.00 -9.84 55.18 32.89 12.99 36.90 0.00 200 132 Peak	Blank
Avg	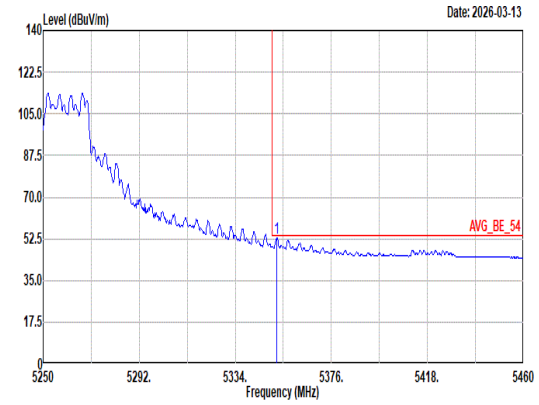 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.06 52.66 54.00 -1.34 43.67 32.90 12.99 36.90 0.00 200 132 Average	Blank

Mode	13
	Harmonic
	U-NII-2A_5.25-5.35_802.11be EHT20_CH52_Full RU_5260MHz
ANT	DB 1+2+3+4 (CDD)

Pol.	Horizontal	Vertical
Peak Avg	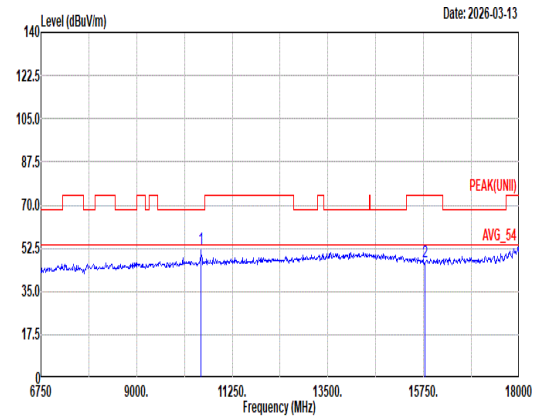	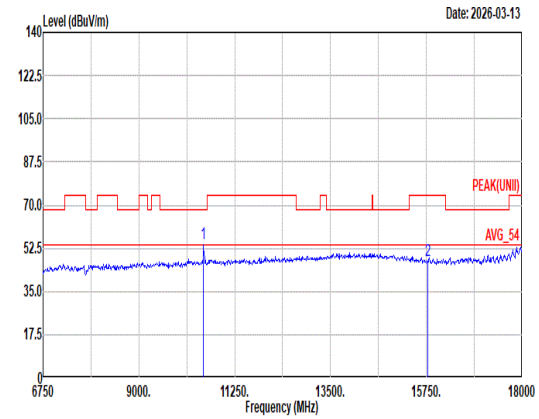

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10520.00	52.54	68.20	-15.66	53.47	38.76	18.40	58.79	0.70	200	42	Peak
2	15780.00	47.23	74.00	-26.77	44.65	37.84	22.84	58.57	0.47	--	--	Peak

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10520.00	54.19	68.20	-14.01	55.12	38.76	18.40	58.79	0.70	200	96	Peak
2	15780.00	47.76	74.00	-26.24	45.18	37.84	22.84	58.57	0.47	--	--	Peak

Mode	13	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH52_Full RU_5260MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	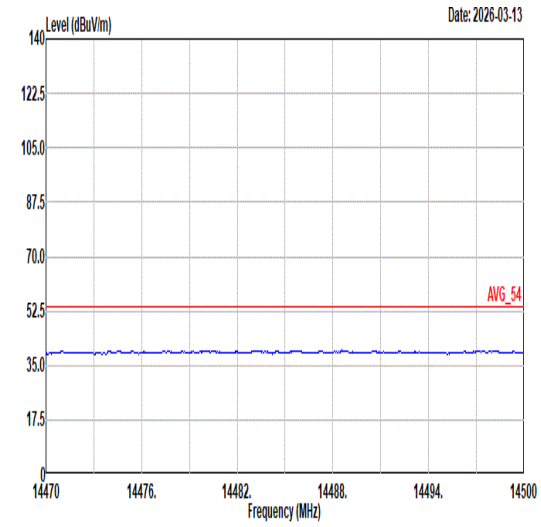 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	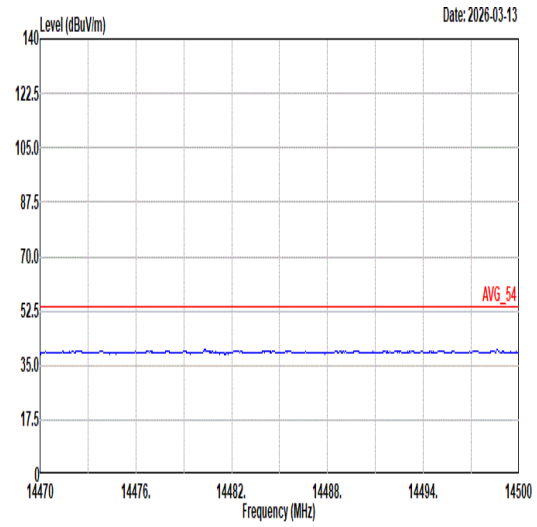 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	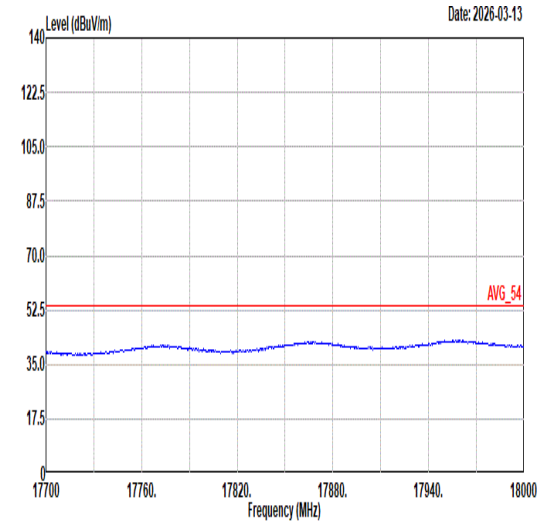 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	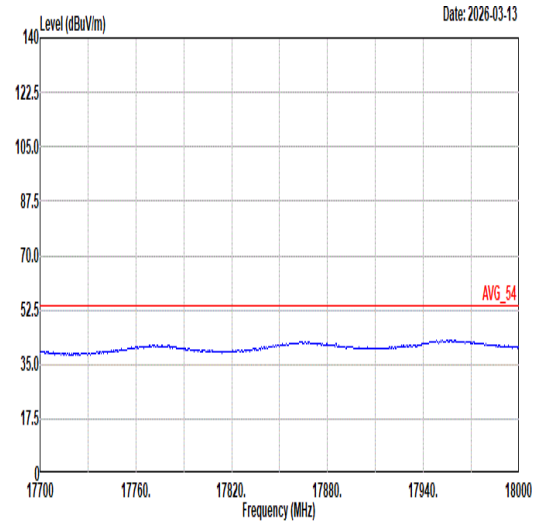 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL

Mode	14	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH60_Full RU_5300MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Fundamental

Peak

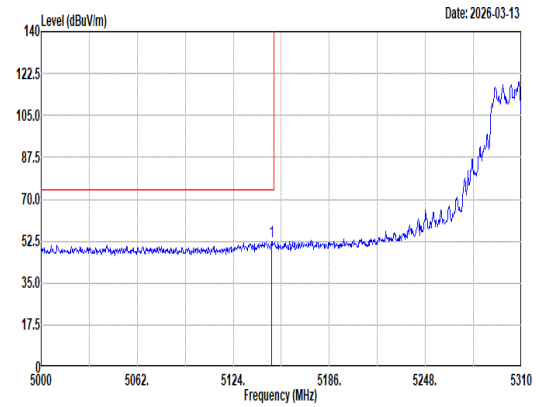

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5148.80	52.31	74.00	-21.69	43.34	33.20	12.67	36.90	0.00	220	80	Peak

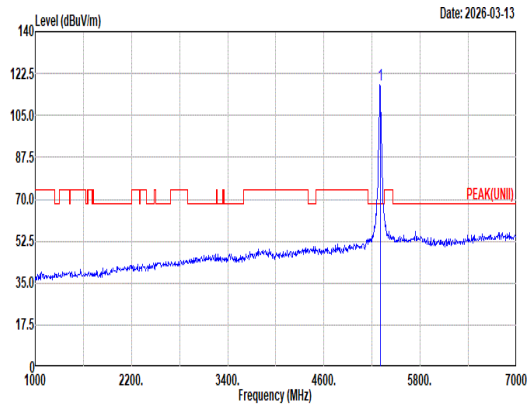

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5300.00	117.66	------	------	108.86	32.81	12.89	36.90	0.00	220	80	Peak

Avg

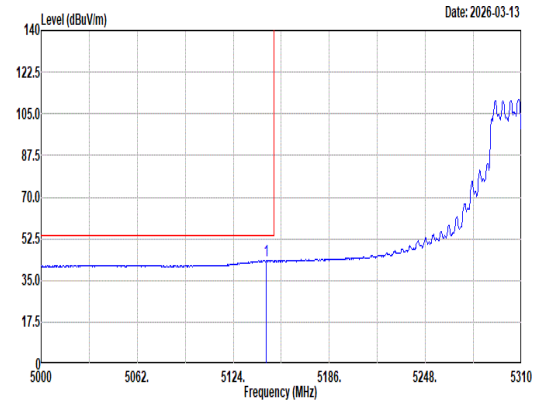

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:0.680kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5145.39	43.33	54.00	-10.67	34.39	33.18	12.66	36.90	0.00	220	80	Average

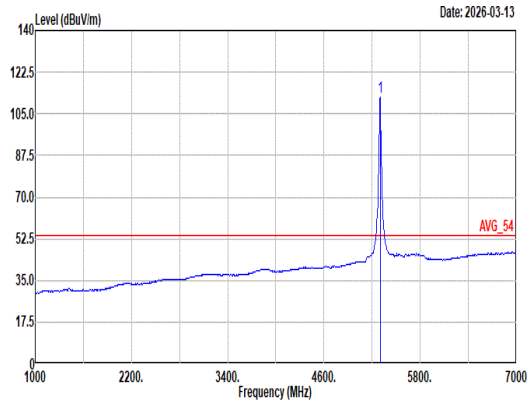

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:0.680kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5300.00	111.94	------	------	103.11	32.82	12.91	36.90	0.00	220	80	Average

Mode	14	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH60_Full RU_5300MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Fundamental
Peak	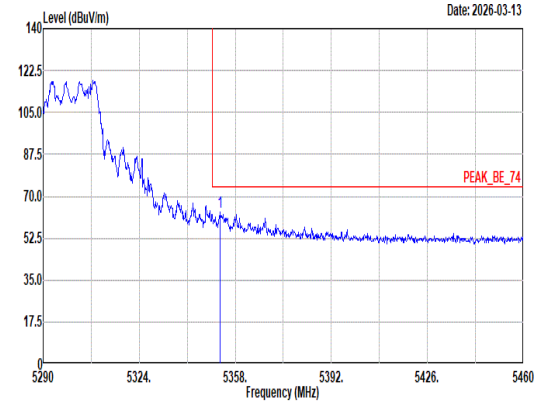 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.73 63.24 74.00 -10.76 54.26 32.89 12.99 36.90 0.00 220 80 Peak	Blank
Avg	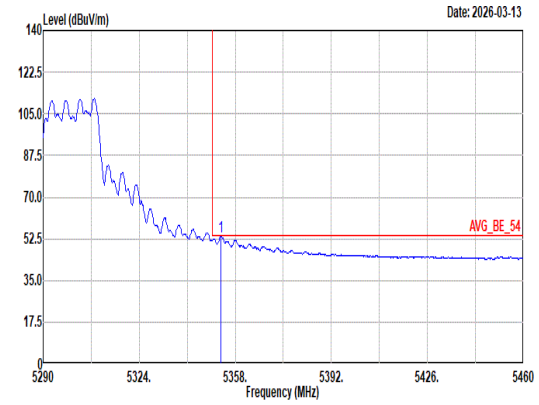 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.90 53.57 54.00 -0.43 44.59 32.89 12.99 36.90 0.00 220 80 Average	Blank

Mode	14	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH60_Full RU_5300MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Vertical	Fundamental

Peak

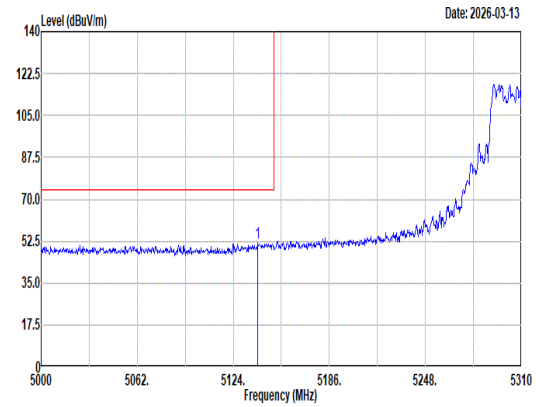

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5139.50	51.94	74.00	-22.06	43.03	33.16	12.65	36.90	0.00	219	135	Peak

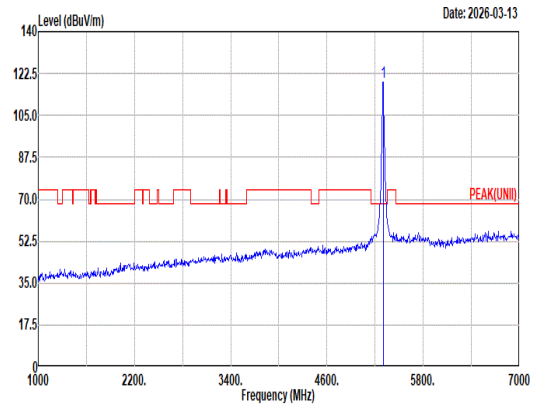

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5300.00	118.89	------	------	110.09	32.80	12.90	36.90	0.00	219	135	Peak

Avg

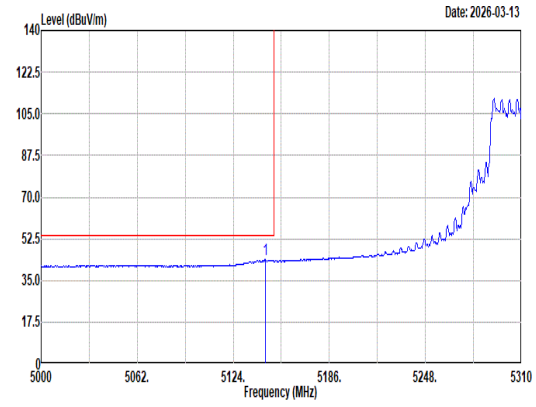

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:0.680kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5144.77	43.72	54.00	-10.28	34.78	33.18	12.66	36.90	0.00	219	135	Average

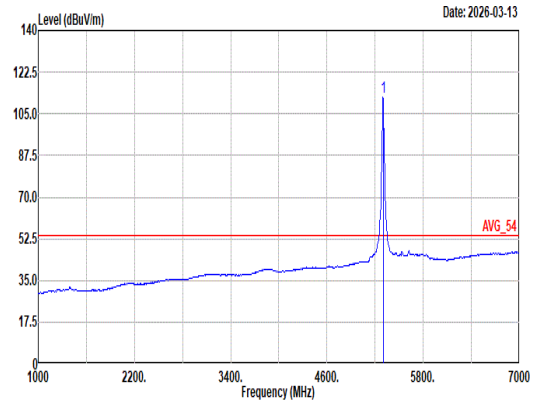

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:0.680kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5300.00	111.94	------	------	103.14	32.82	12.88	36.90	0.00	219	135	Average

Mode	14	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH60_Full RU_5300MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Vertical	Fundamental
Peak	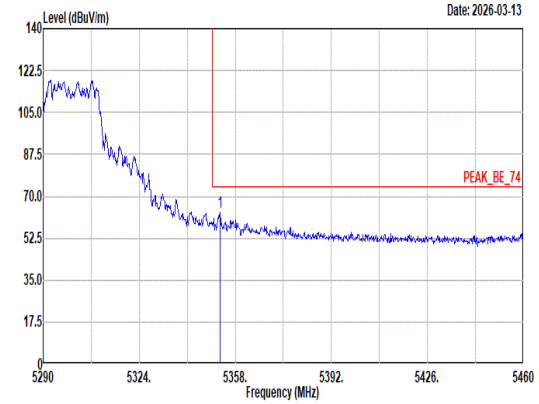 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.73 63.59 74.00 -10.41 54.61 32.89 12.99 36.90 0.00 219 135 Peak	Blank
Avg	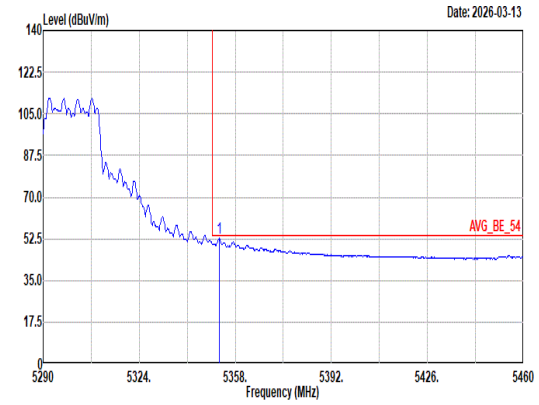 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.22 52.64 54.00 -1.36 43.65 32.90 12.99 36.90 0.00 219 135 Average	Blank

Mode	14	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH60_Full RU_5300MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical

Peak

Avg

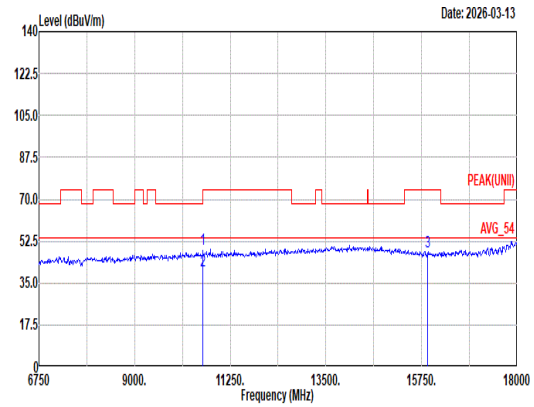

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10600.00	49.17	74.00	-24.83	49.73	39.00	18.48	58.73	0.69	200	55	Peak
2	10600.00	40.32	54.00	-13.68	40.88	39.00	18.48	58.73	0.69	200	55	Average
3	15900.00	47.82	74.00	-26.18	45.07	38.00	22.92	58.63	0.46	--	--	Peak

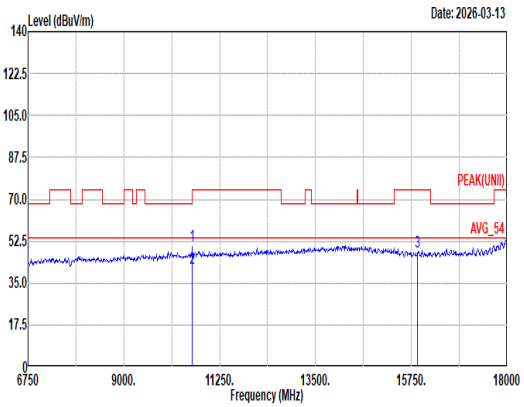

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10600.00	50.74	74.00	-23.26	51.30	39.00	18.48	58.73	0.69	200	96	Peak
2	10600.00	41.04	54.00	-12.96	41.60	39.00	18.48	58.73	0.69	200	96	Average
3	15900.00	47.92	74.00	-26.08	45.17	38.00	22.92	58.63	0.46	--	--	Peak

Mode	14	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH60_Full RU_5300MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	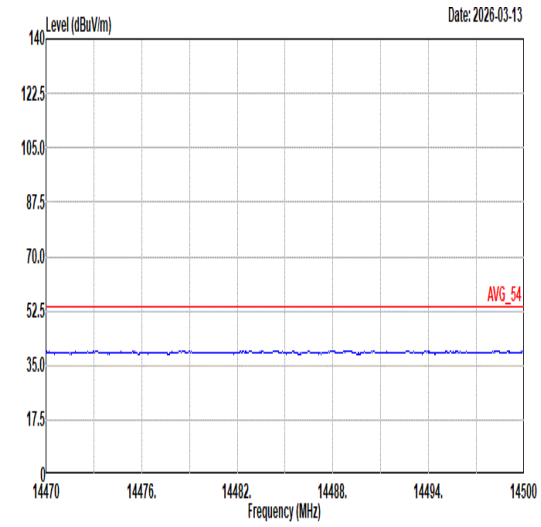 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	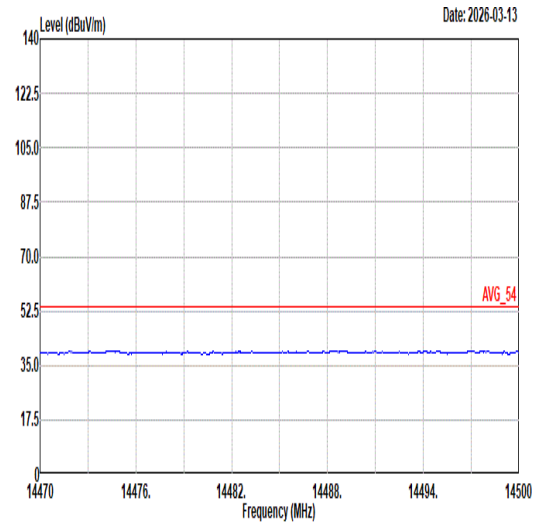 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	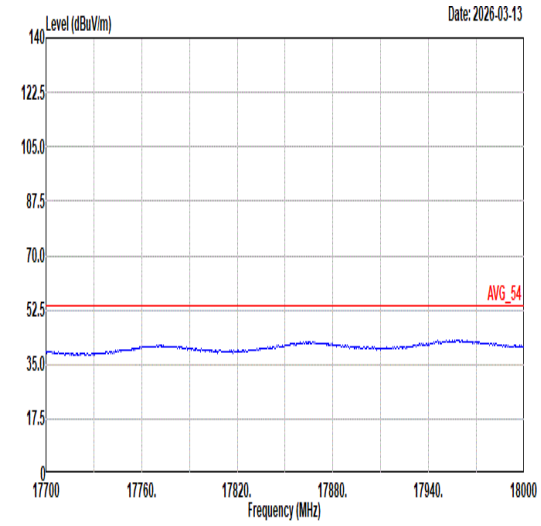 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	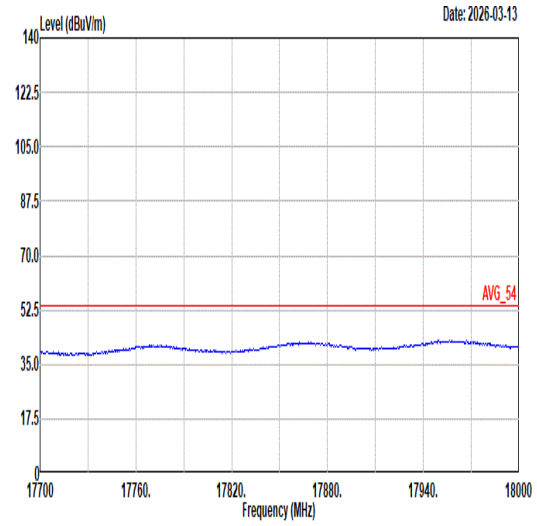 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL

Mode	15	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH64_Full RU_5320MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Fundamental

Peak

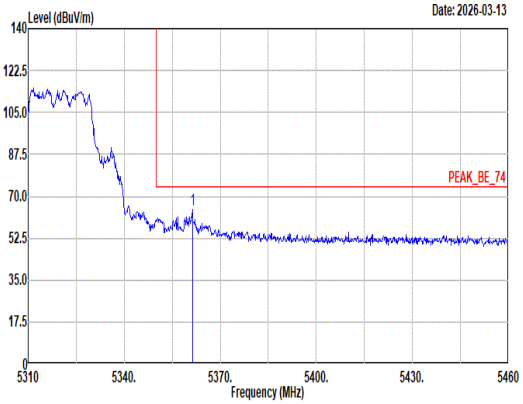

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5361.30	64.66	74.00	-9.34	55.68	32.88	13.00	36.90	0.00	266	63	Peak

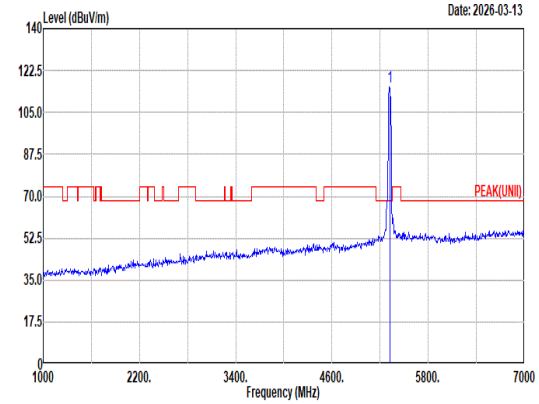

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5320.00	115.47	------	------	106.62	32.83	12.92	36.90	0.00	266	63	Peak

Avg

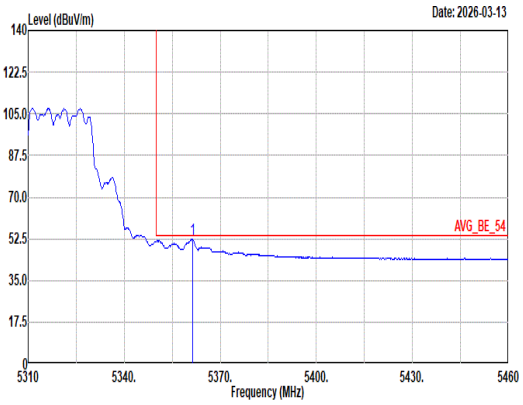

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:0.680kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5361.45	52.43	54.00	-1.57	43.45	32.88	13.00	36.90	0.00	266	63	Average

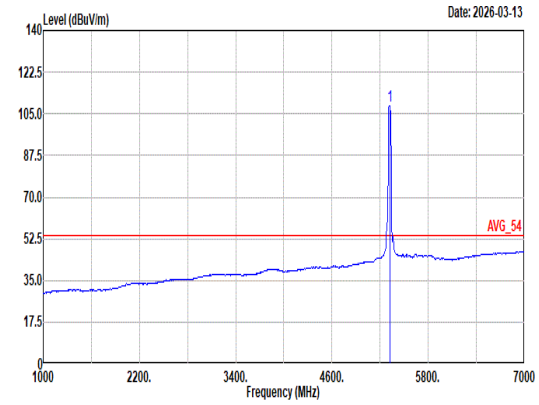

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:0.680kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5320.00	108.36	------	------	99.51	32.83	12.92	36.90	0.00	266	63	Average

Mode	15	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH64_Full RU_5320MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Vertical	Fundamental

Peak

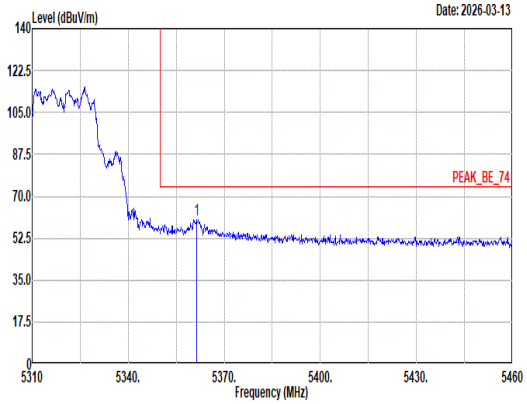

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5361.30	60.47	74.00	-13.53	51.49	32.88	13.00	36.90	0.00	182	0	Peak

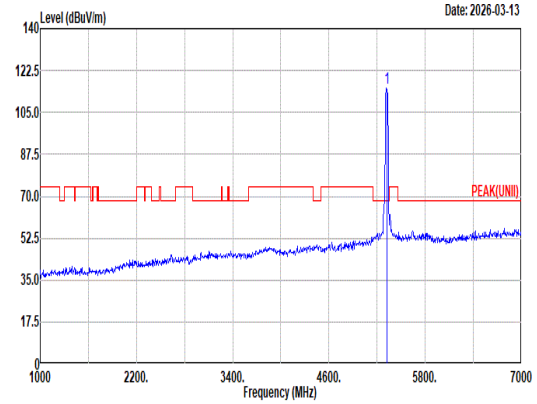

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5320.00	114.95	------	------	106.10	32.83	12.92	36.90	0.00	182	0	Peak

Avg

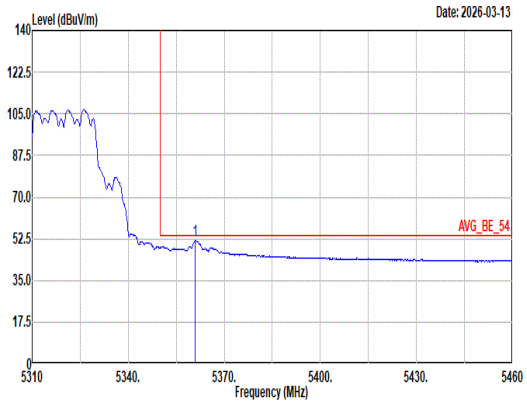

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:0.680kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5360.85	51.83	54.00	-2.17	42.85	32.88	13.00	36.90	0.00	182	0	Average

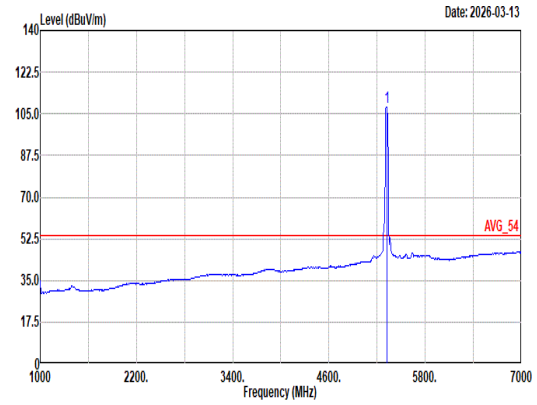

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:0.680kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5320.00	107.81	------	------	98.92	32.85	12.94	36.90	0.00	182	0	Average

Mode	15	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH64_Full RU_5320MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical
Peak Avg	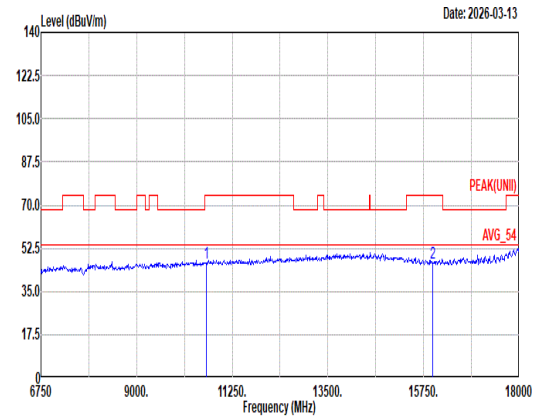	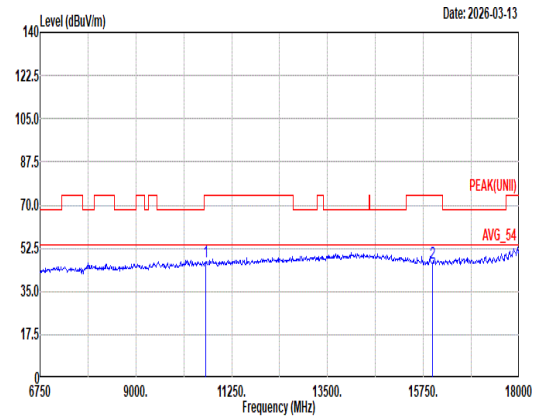

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10640.00	46.61	74.00	-27.39	47.03	39.08	18.52	58.70	0.68	--	--	Peak
2	15960.00	46.71	74.00	-27.29	44.20	37.76	22.96	58.67	0.46	--	--	Peak

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10640.00	47.12	74.00	-26.88	47.54	39.08	18.52	58.70	0.68	--	--	Peak
2	15960.00	46.49	74.00	-27.51	43.98	37.76	22.96	58.67	0.46	--	--	Peak

Mode	15	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH64_Full RU_5320MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	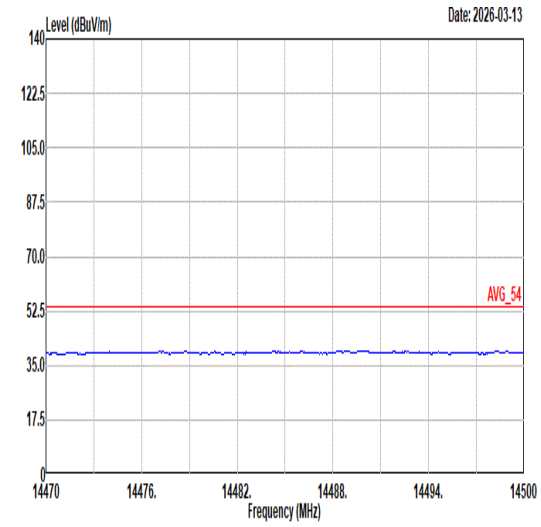 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	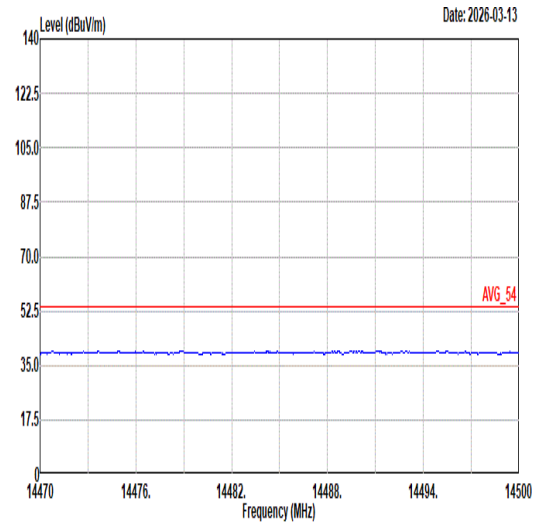 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	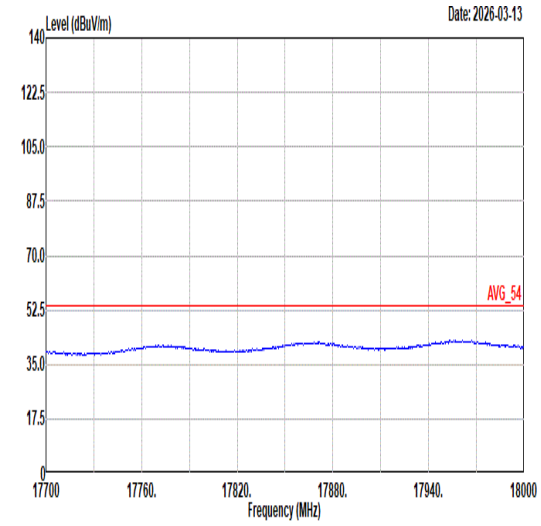 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	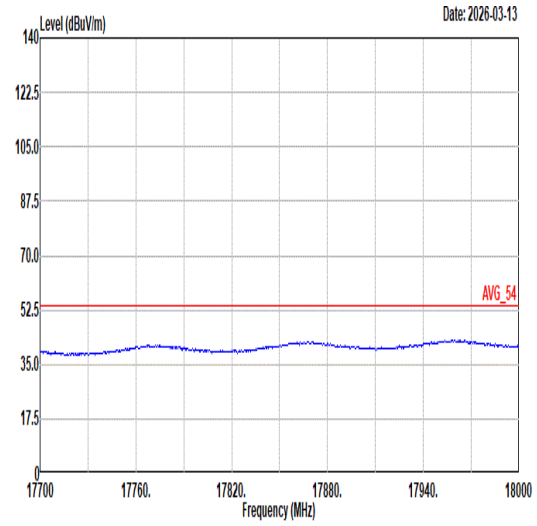 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL

Mode	16
	Band Edge - L
	U-NII-2A_5.25-5.35_802.11be EHT40_CH54_Full RU_5270MHz
ANT	DB 1+2+3+4 (CDD)

Pol.	Horizontal	Fundamental

Peak

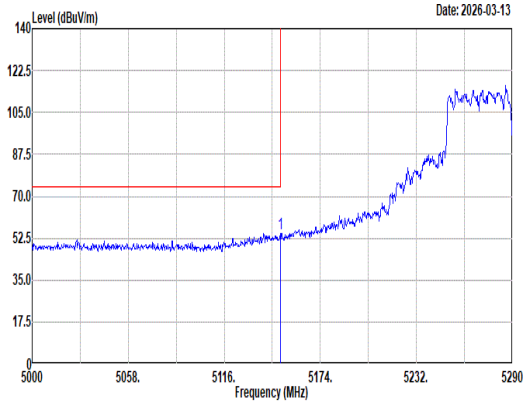

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5149.93	54.60	74.00	-19.40	45.63	33.20	12.67	36.90	0.00	138	93	Peak

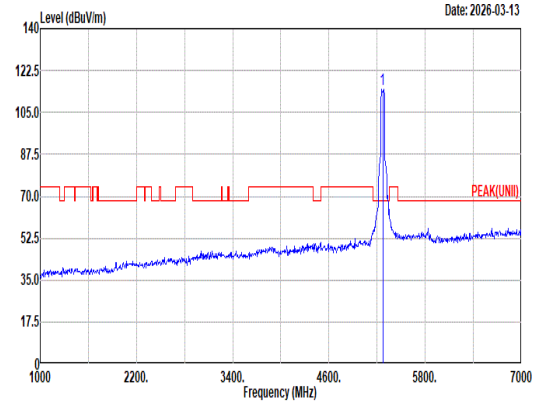

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5270.00	114.70	------	------	105.90	32.83	12.87	36.90	0.00	138	93	Peak

Avg

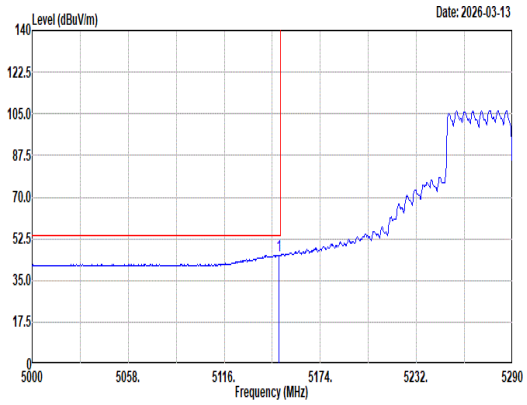

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:1.300kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5149.06	45.59	54.00	-8.41	36.62	33.20	12.67	36.90	0.00	138	93	Average

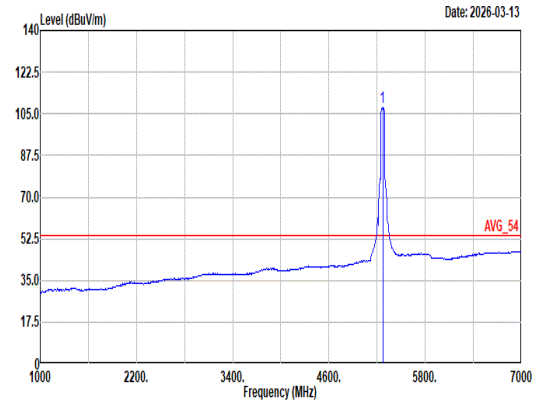

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:1.300kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5270.00	107.53	------	------	98.73	32.84	12.86	36.90	0.00	138	93	Average

Mode	16	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11be EHT40_CH54_Full RU_5270MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Fundamental
Peak	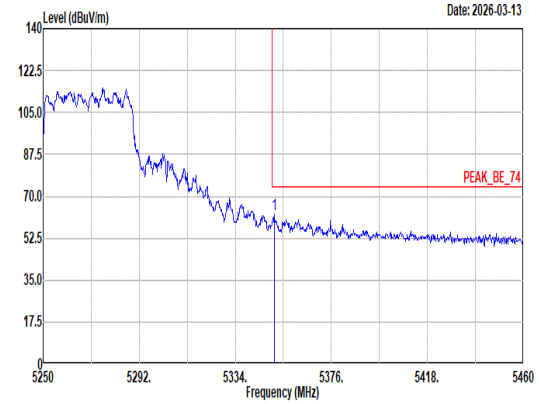 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.01 62.27 74.00 -11.73 53.28 32.90 12.99 36.90 0.00 138 93 Peak	Blank
Avg	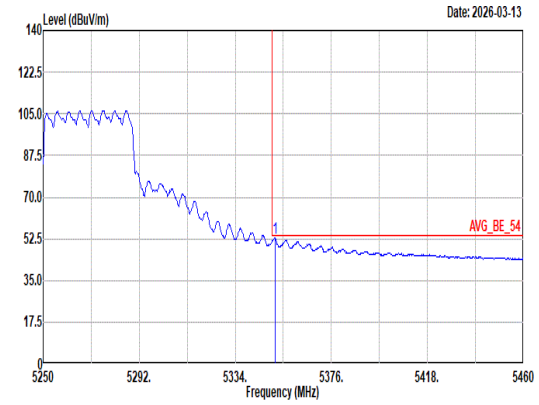 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:1.300kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.43 52.72 54.00 -1.28 43.73 32.90 12.99 36.90 0.00 138 93 Average	Blank

Mode	16
	Band Edge - L
	U-NII-2A_5.25-5.35_802.11be EHT40_CH54_Full RU_5270MHz
ANT	DB 1+2+3+4 (CDD)

Pol.	Vertical	Fundamental

Peak

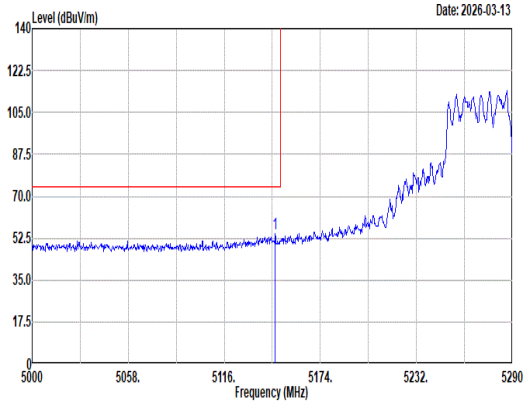

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5146.74	54.17	74.00	-19.83	45.22	33.19	12.66	36.90	0.00	400	352	Peak

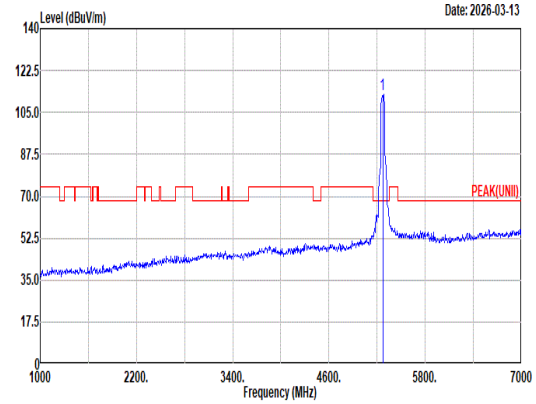

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5270.00	112.59	------	------	103.79	32.83	12.87	36.90	0.00	400	352	Peak

Avg

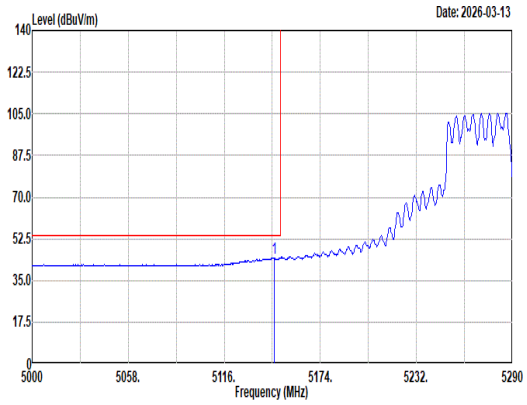

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:1.300kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5146.16	44.43	54.00	-9.57	35.49	33.18	12.66	36.90	0.00	400	352	Average

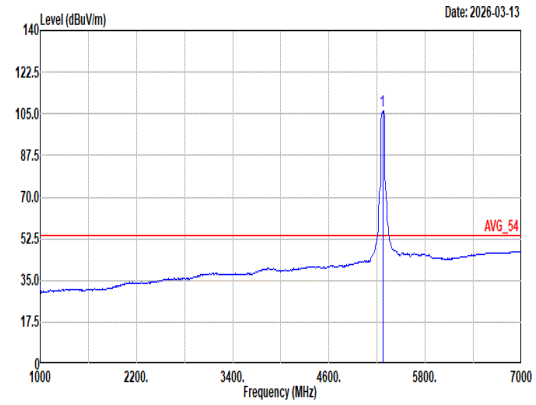

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
: RBW:1000.000kHz VBW:1.300kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5270.00	106.40	------	------	97.60	32.83	12.87	36.90	0.00	400	352	Average

Mode	16	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11be EHT40_CH54_Full RU_5270MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Vertical	Fundamental
Peak	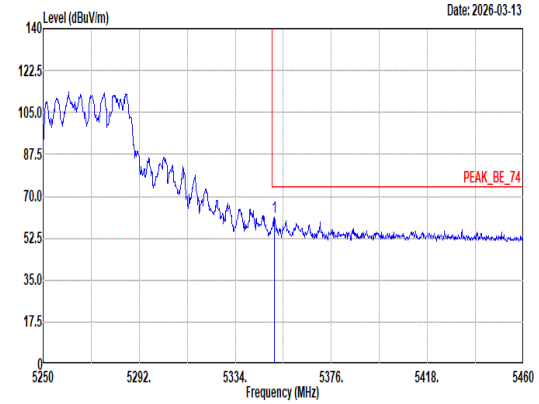 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.01 61.36 74.00 -12.64 52.37 32.90 12.99 36.90 0.00 400 352 Peak	Blank
Avg	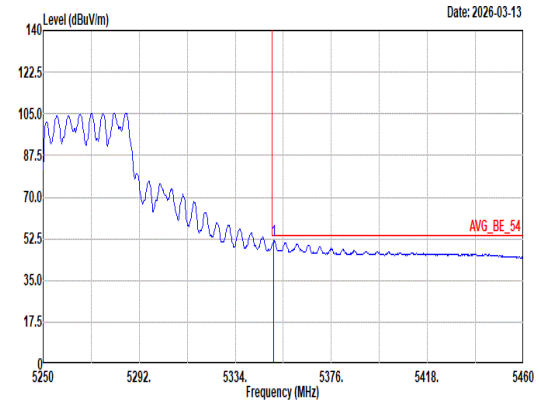 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:1.300kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.80 51.65 54.00 -2.35 42.66 32.90 12.99 36.90 0.00 400 352 Average	Blank

Mode	16	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11be EHT40_CH54_Full RU_5270MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical

Peak

Avg

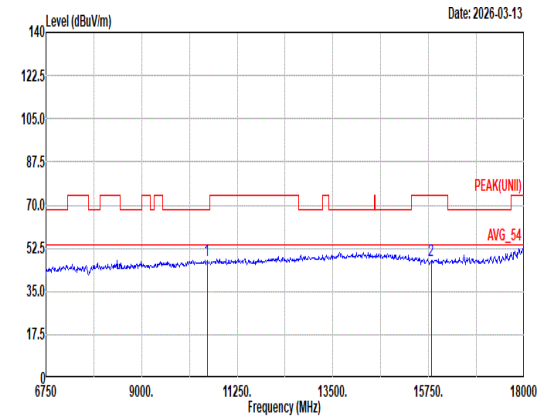

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10540.00	47.33	68.20	-20.87	48.17	38.82	18.42	58.78	0.70	--	--	Peak
2	15810.00	47.73	74.00	-26.27	45.16	37.82	22.86	58.58	0.47	--	--	Peak

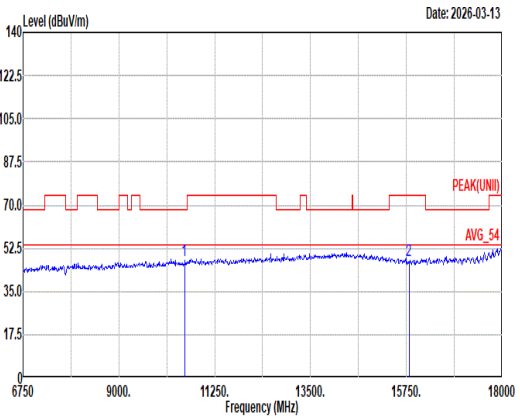

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10540.00	47.58	68.20	-20.62	48.42	38.82	18.42	58.78	0.70	--	--	Peak
2	15810.00	47.52	74.00	-26.48	44.95	37.82	22.86	58.58	0.47	--	--	Peak

Mode	16	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11be EHT40_CH54_Full RU_5270MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	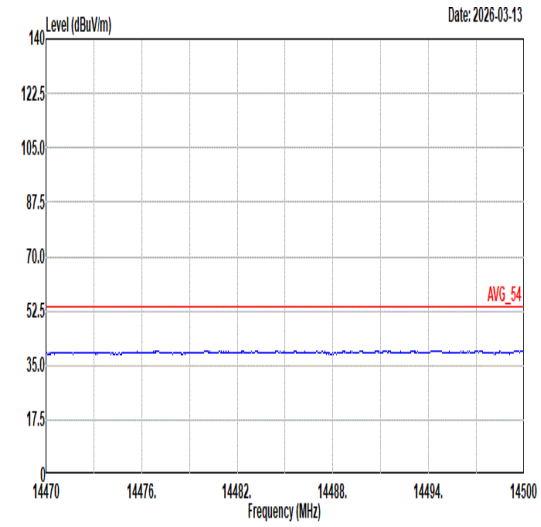 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	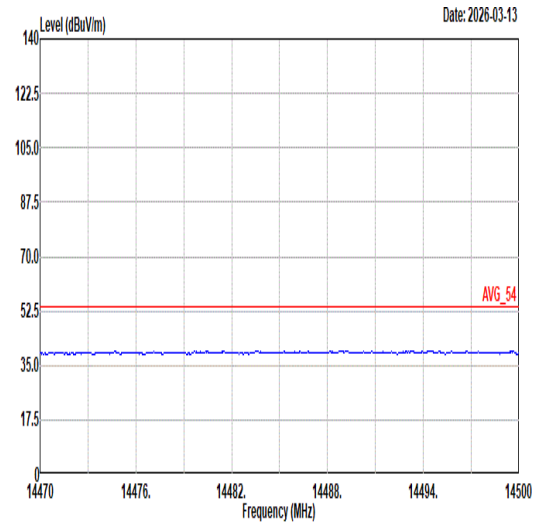 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	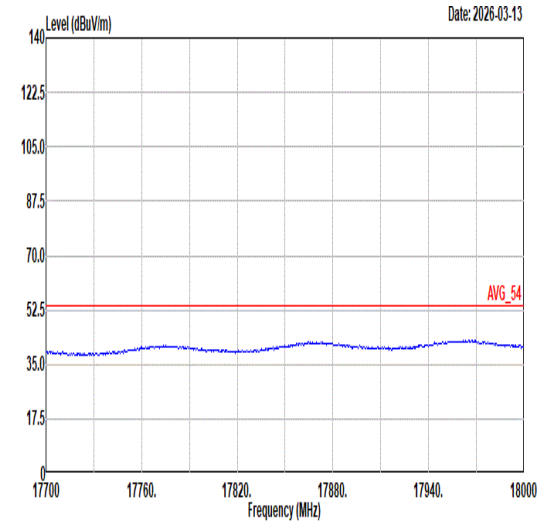 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	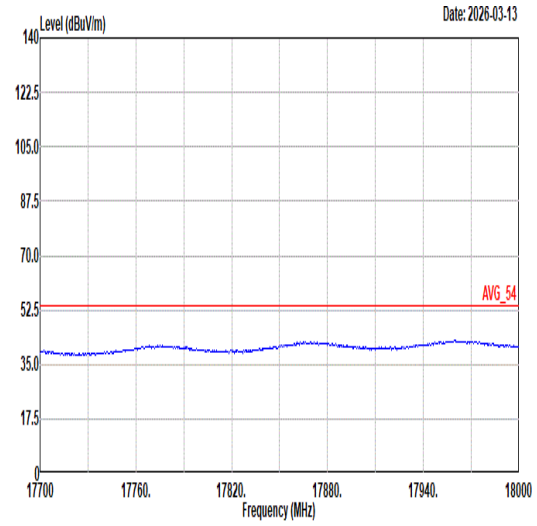 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL

Mode	17
	Band Edge - L
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full RU_5310MHz
ANT	DB 1+2+3+4 (CDD)

Pol.	Horizontal	Fundamental

Peak

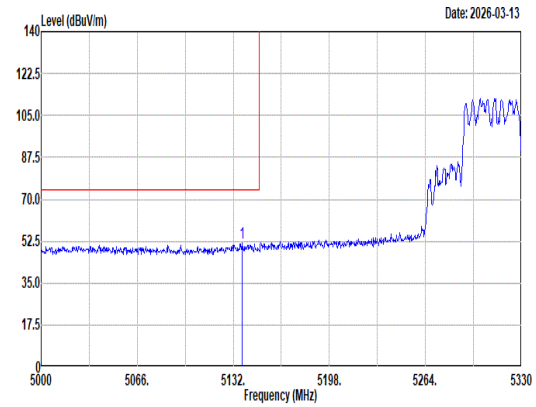

Site : 03CH15-HY
Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5138.27	51.72	74.00	-22.28	42.82	33.15	12.65	36.90	0.00	191	97	Peak

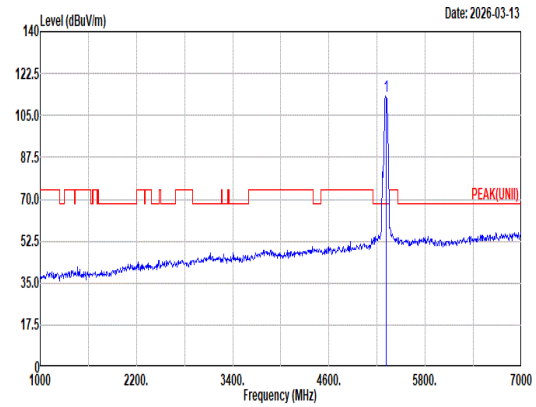

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5310.00	113.15	------	------	104.35	32.80	12.90	36.90	0.00	191	97	Peak

Avg

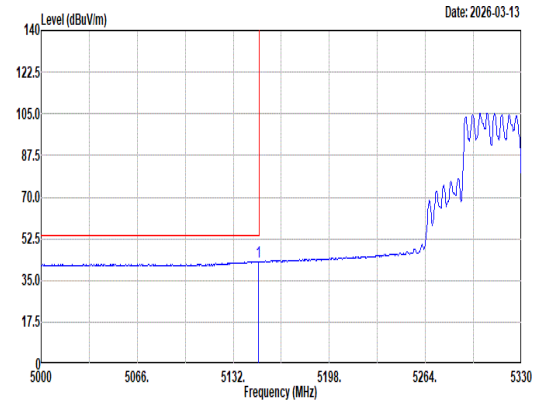

Site : 03CH15-HY
Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:1.300kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5149.49	42.95	54.00	-11.05	33.98	33.20	12.67	36.90	0.00	191	97	Average

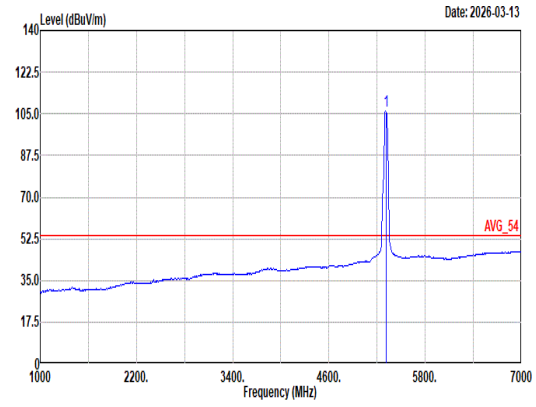

Site : 03CH15-HY
Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL
: RBW:1000.000kHz VBW:1.300kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5310.00	106.09	------	------	97.29	32.80	12.90	36.90	0.00	191	97	Average

Mode	17	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full RU_5310MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Fundamental
Peak	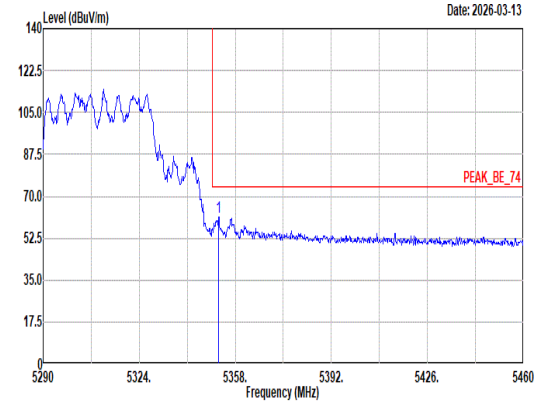 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.05 61.48 74.00 -12.52 52.49 32.90 12.99 36.90 0.00 191 97 Peak	Blank
Avg	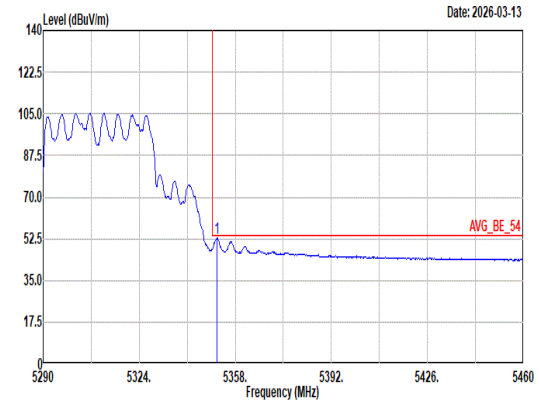 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:1.300kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.54 52.87 54.00 -1.13 43.88 32.90 12.99 36.90 0.00 191 97 Average	Blank

Mode	17
	Band Edge - L
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full RU_5310MHz
ANT	DB 1+2+3+4 (CDD)

Pol.	Vertical	Fundamental
Peak	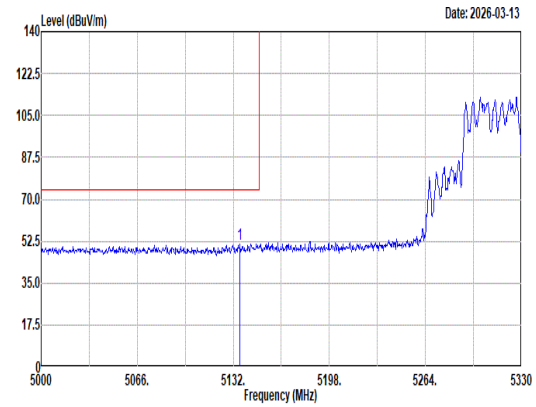 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5136.62 51.49 74.00 -22.51 42.59 33.15 12.65 36.90 0.00 300 342 Peak	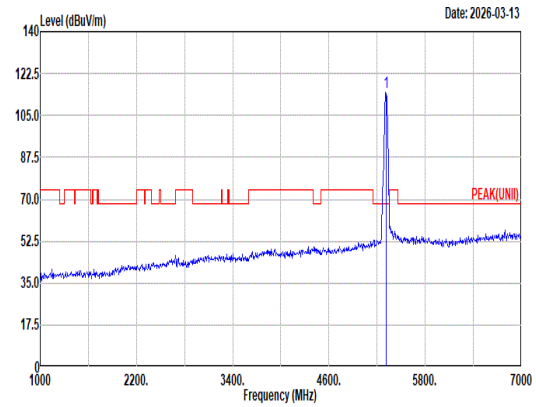 Site : 03CH15-HY Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5310.00 114.86 ------ ------ 106.03 32.82 12.91 36.90 0.00 300 342 Peak
Avg	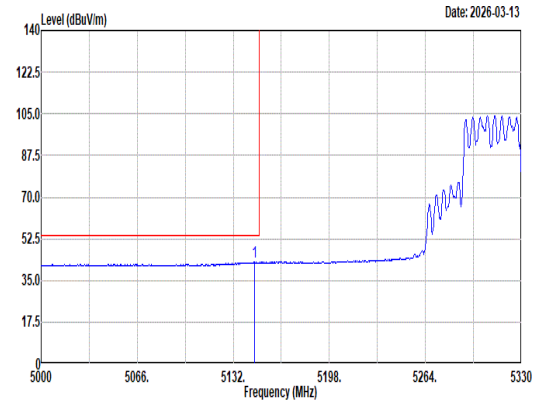 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:1.300kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5146.85 42.59 54.00 -11.41 33.64 33.19 12.66 36.90 0.00 300 342 Average	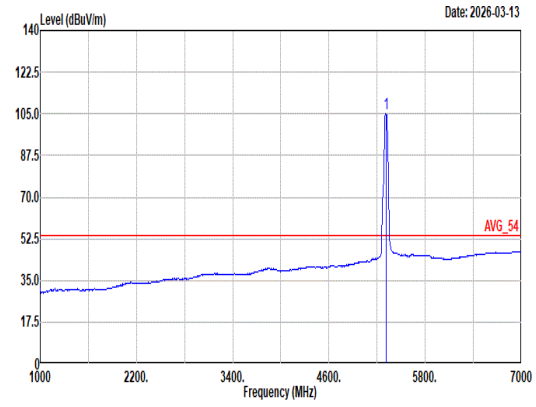 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:1.300kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5310.00 104.94 ------ ------ 96.11 32.82 12.91 36.90 0.00 300 342 Average

Mode	17	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full RU_5310MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Vertical	Fundamental
Peak	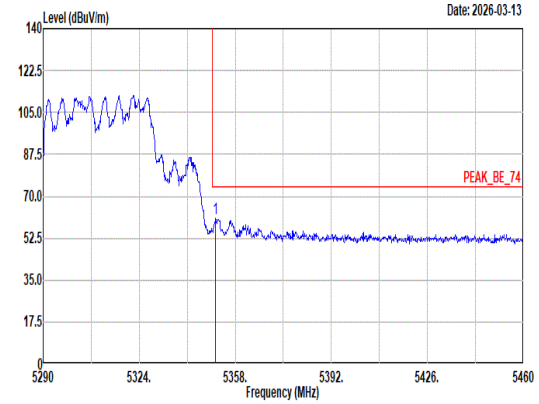 Site : 03CH15-HY Condition: PEAK_BE_74 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.03 60.50 74.00 -13.50 51.51 32.90 12.99 36.90 0.00 300 342 Peak	Blank
Avg	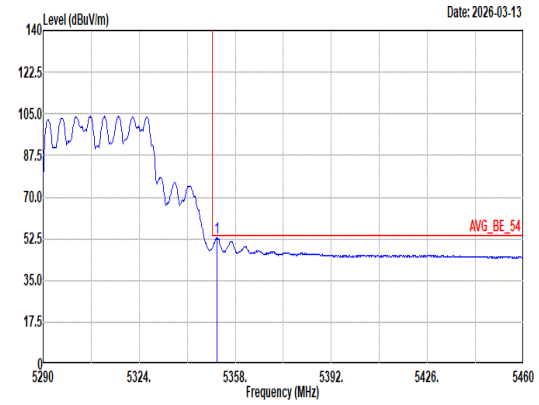 Site : 03CH15-HY Condition: AVG_BE_54 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:1.300kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.54 52.79 54.00 -1.21 43.80 32.90 12.99 36.90 0.00 300 342 Average	Blank

Mode	17	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full RU_5310MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical

Peak

Avg

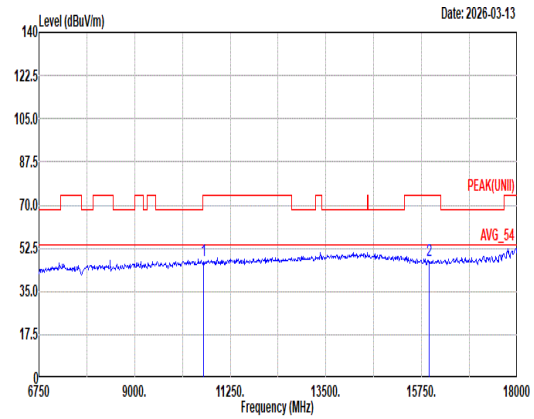

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 HORIZONTAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10620.00	47.56	74.00	-26.44	48.04	39.04	18.50	58.71	0.69	--	--	Peak
2	15930.00	47.62	74.00	-26.38	44.99	37.88	22.94	58.65	0.46	--	--	Peak

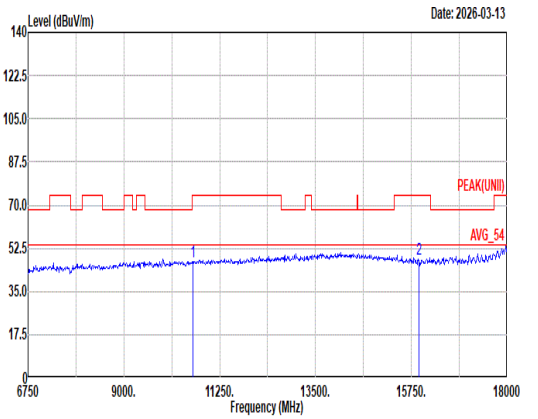

Site : 03CH15-HY
Condition: PEAK(UNII) 3m 9120D-02294_250606 VERTICAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	10620.00	47.07	74.00	-26.93	47.55	39.04	18.50	58.71	0.69	--	--	Peak
2	15930.00	47.98	74.00	-26.02	45.35	37.88	22.94	58.65	0.46	--	--	Peak

Mode	17	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full RU_5310MHz	
ANT	DB 1+2+3+4 (CDD)	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	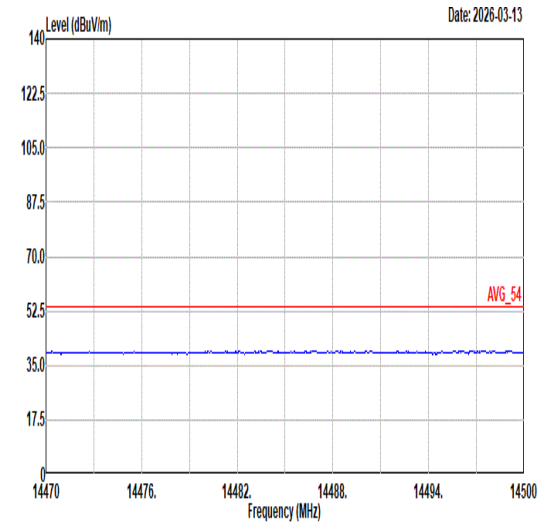 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	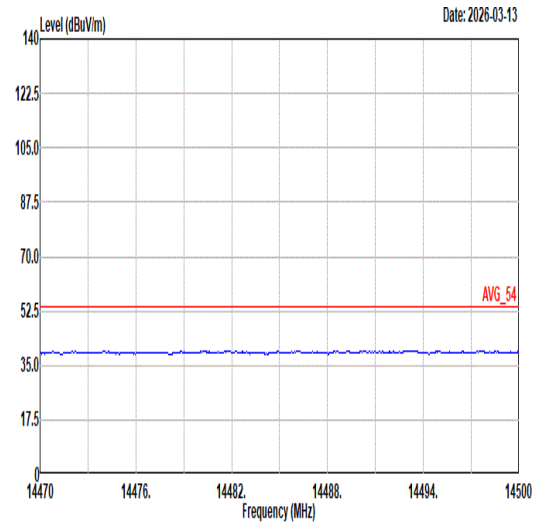 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	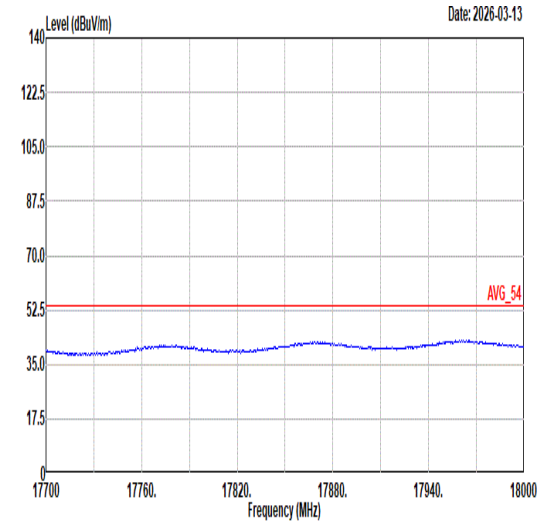 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 HORIZONTAL	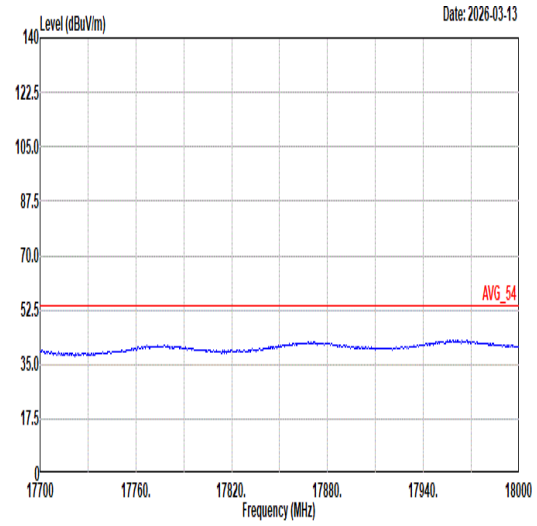 Site : 03CH15-HY Condition: AVG_54 3m 9120D-02294_250606 VERTICAL