


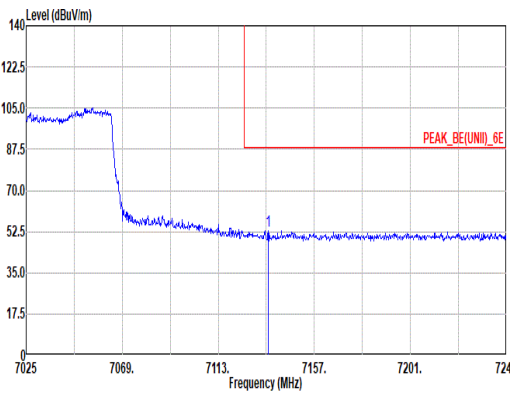
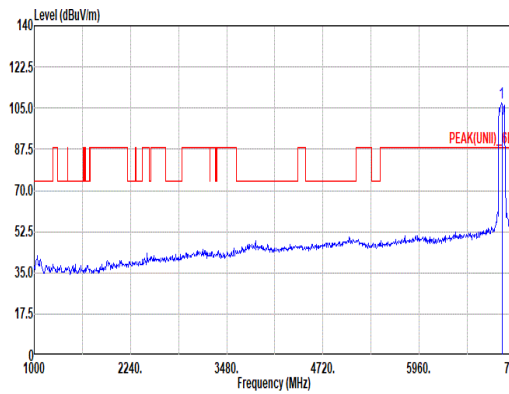
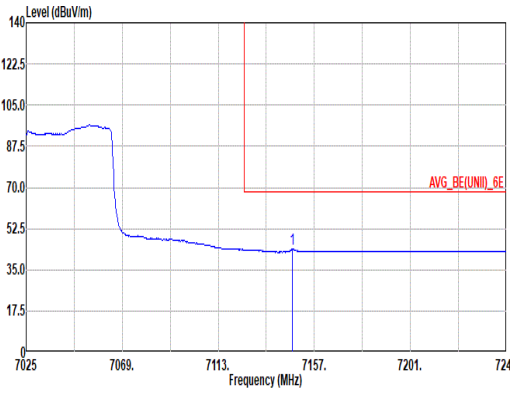
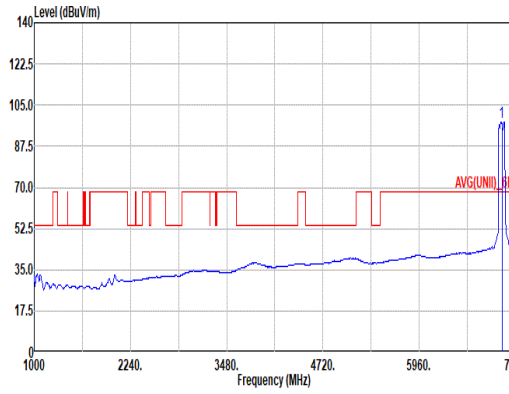
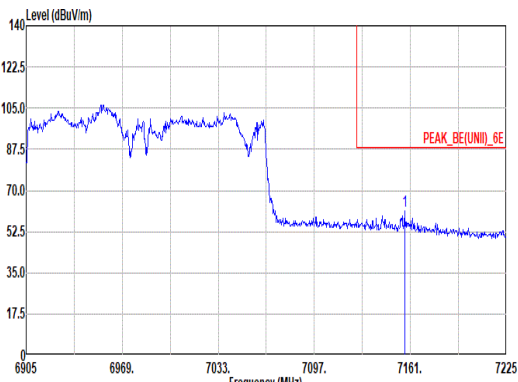





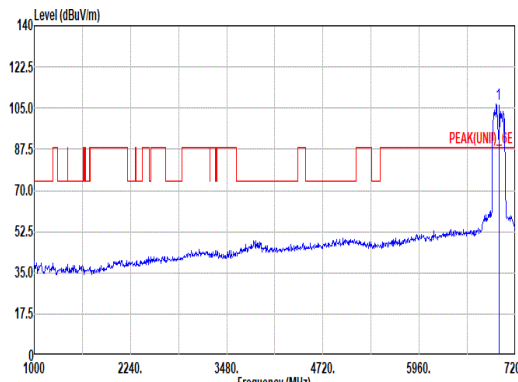


Mode	48																																																																																	
	Band Edge																																																																																	
	U-NII-8_6.875-7.125_802.11be EHT80_CH215_Full RU_7025MHz																																																																																	
ANT	1+2+3+4																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 7135.88</td><td>52.92</td><td>88.20 -35.28</td><td>39.39</td><td>36.59</td><td>15.26</td><td>38.32</td><td>0.00</td><td>200</td><td>84 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 7135.88	52.92	88.20 -35.28	39.39	36.59	15.26	38.32	0.00	200	84 PEAK	 Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 7025.00</td><td>107.12</td><td>-----</td><td>94.13</td><td>36.08</td><td>15.14</td><td>38.23</td><td>0.00</td><td>200</td><td>84 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 7025.00	107.12	-----	94.13	36.08	15.14	38.23	0.00	200	84 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 7135.88	52.92	88.20 -35.28	39.39	36.59	15.26	38.32	0.00	200	84 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 7025.00	107.12	-----	94.13	36.08	15.14	38.23	0.00	200	84 PEAK																																																																									
Avg.	 Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.240kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 7146.88</td><td>43.70</td><td>68.20 -24.50</td><td>30.08</td><td>36.68</td><td>15.27</td><td>38.33</td><td>0.00</td><td>200</td><td>84 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 7146.88	43.70	68.20 -24.50	30.08	36.68	15.27	38.33	0.00	200	84 AVERAGE	 Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.240kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 7025.00</td><td>97.80</td><td>-----</td><td>84.67</td><td>36.21</td><td>15.18</td><td>38.26</td><td>0.00</td><td>200</td><td>84 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 7025.00	97.80	-----	84.67	36.21	15.18	38.26	0.00	200	84 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 7146.88	43.70	68.20 -24.50	30.08	36.68	15.27	38.33	0.00	200	84 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 7025.00	97.80	-----	84.67	36.21	15.18	38.26	0.00	200	84 AVERAGE																																																																									


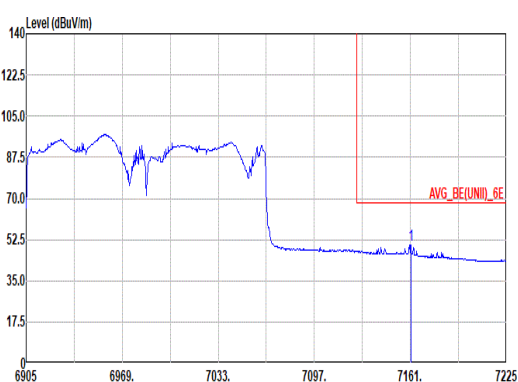


		49																																																																																								
Mode	Band Edge																																																																																									
	U-NII-8_6.875-7.125_802.11be EHT160_CH207_Full RU_6985MHz																																																																																									
ANT	1+2+3+4																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 7157.16</td><td>61.09</td><td>88.20 -27.11</td><td>47.41</td><td>36.73</td><td>15.29</td><td>38.34</td><td>0.00</td><td>185</td><td>56 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 7157.16	61.09	88.20 -27.11	47.41	36.73	15.29	38.34	0.00	185	56 PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 6985.00</td><td>106.46</td><td>-----</td><td>93.76</td><td>35.81</td><td>15.08</td><td>38.19</td><td>0.00</td><td>185</td><td>56 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 6985.00	106.46	-----	93.76	35.81	15.08	38.19	0.00	185
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																				
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1 7157.16	61.09	88.20 -27.11	47.41	36.73	15.29	38.34	0.00	185	56 PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																				
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1 6985.00	106.46	-----	93.76	35.81	15.08	38.19	0.00	185	56 PEAK																																																																																	
Avg.																																																																																										
	Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.240kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 7161.32</td><td>50.40</td><td>68.20 -17.80</td><td>36.71</td><td>36.75</td><td>15.29</td><td>38.35</td><td>0.00</td><td>185</td><td>56 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 7161.32	50.40	68.20 -17.80	36.71	36.75	15.29	38.35	0.00	185	56 AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.240kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 6985.00</td><td>98.68</td><td>-----</td><td>85.96</td><td>35.83</td><td>15.08</td><td>38.19</td><td>0.00</td><td>185</td><td>56 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 6985.00	98.68	-----	85.96	35.83	15.08	38.19	0.00	185
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																				
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1 7161.32	50.40	68.20 -17.80	36.71	36.75	15.29	38.35	0.00	185	56 AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																				
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1 6985.00	98.68	-----	85.96	35.83	15.08	38.19	0.00	185	56 AVERAGE																																																																																	




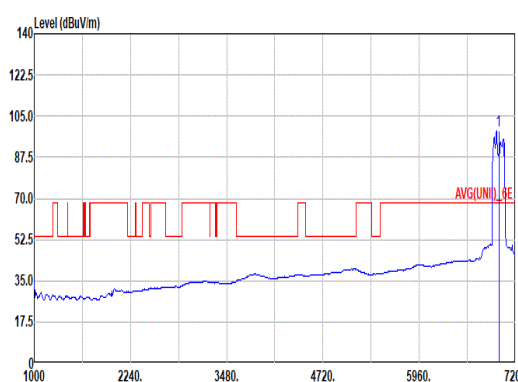


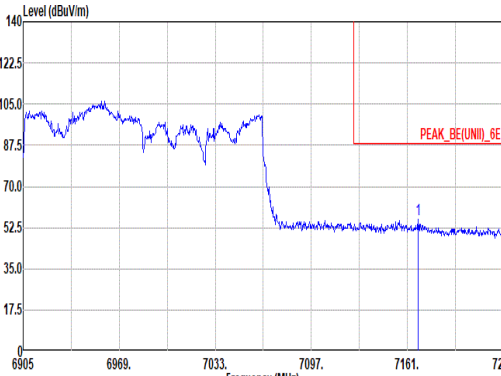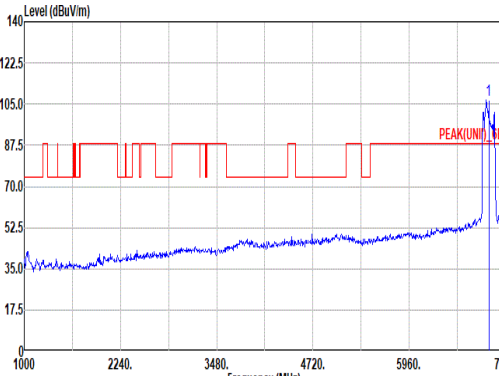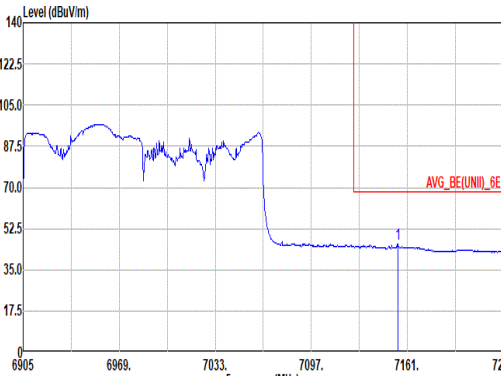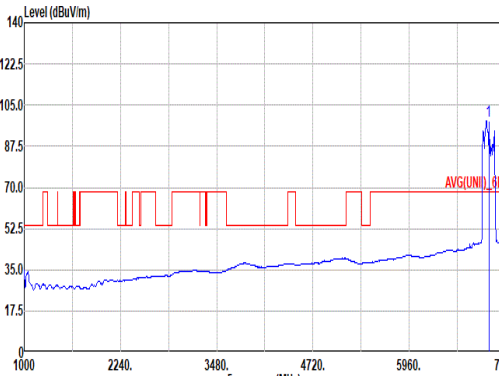		49																																																																																															
Mode	Band Edge																																																																																																
	U-NII-8_6.875-7.125_802.11be EHT160_CH207_Full RU_6985MHz																																																																																																
ANT	1+2+3+4																																																																																																
Pol.	Vertical						Fundamental																																																																																										
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>7168.04</td><td>56.15</td><td>88.20</td><td>-32.05</td><td>42.43</td><td>36.77</td><td>15.30</td><td>38.35</td><td>0.00</td><td>400</td><td>67 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7168.04	56.15	88.20	-32.05	42.43	36.77	15.30	38.35	0.00	400	67 PEAK	 Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6985.00</td><td>106.61</td><td>-----</td><td>-----</td><td>93.91</td><td>35.81</td><td>15.08</td><td>38.19</td><td>0.00</td><td>400</td><td>67 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6985.00	106.61	-----	-----	93.91	35.81	15.08	38.19	0.00	400	67 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	7168.04	56.15	88.20	-32.05	42.43	36.77	15.30	38.35	0.00	400	67 PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	6985.00	106.61	-----	-----	93.91	35.81	15.08	38.19	0.00	400	67 PEAK																																																																																						
Avg.	 Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.240kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>7154.60</td><td>45.98</td><td>68.20</td><td>-22.22</td><td>32.32</td><td>36.72</td><td>15.28</td><td>38.34</td><td>0.00</td><td>400</td><td>67 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7154.60	45.98	68.20	-22.22	32.32	36.72	15.28	38.34	0.00	400	67 AVERAGE	 Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.240kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6985.00</td><td>98.20</td><td>-----</td><td>-----</td><td>85.50</td><td>35.81</td><td>15.08</td><td>38.19</td><td>0.00</td><td>400</td><td>67 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6985.00	98.20	-----	-----	85.50	35.81	15.08	38.19	0.00	400	67 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	7154.60	45.98	68.20	-22.22	32.32	36.72	15.28	38.34	0.00	400	67 AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	6985.00	98.20	-----	-----	85.50	35.81	15.08	38.19	0.00	400	67 AVERAGE																																																																																						



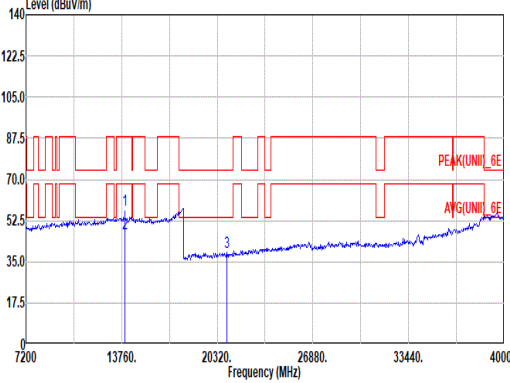
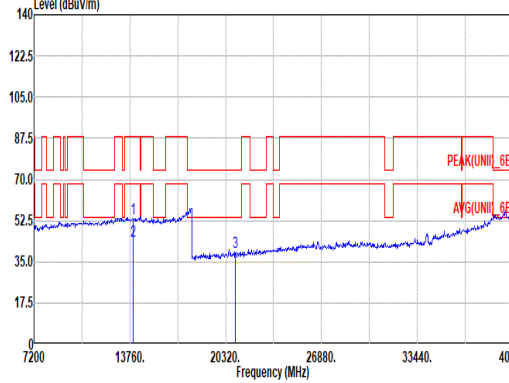


		49																																																																													
Mode		Harmonic																																																																													
		U-NII-8_6.875-7.125_802.11be EHT160_CH207_Full RU_6985MHz																																																																													
ANT		1+2+3+4																																																																													
Pol.		Horizontal						Vertical																																																																							
Peak Avg.																																																																															
	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91280_02360_241101 HORIZONTAL Mode : 49 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13970.00</td><td>57.05</td><td>88.20</td><td>-31.15</td><td>38.73</td><td>39.26</td><td>21.53</td><td>43.57</td><td>1.10</td><td>151</td><td>PEAK</td></tr><tr><td>2</td><td>13970.00</td><td>46.89</td><td>68.20</td><td>-21.31</td><td>28.57</td><td>39.26</td><td>21.53</td><td>43.57</td><td>1.10</td><td>100</td><td>Average</td></tr><tr><td>3</td><td>20955.00</td><td>38.85</td><td>74.00</td><td>-35.15</td><td>38.64</td><td>37.92</td><td>26.65</td><td>54.82</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13970.00	57.05	88.20	-31.15	38.73	39.26	21.53	43.57	1.10	151	PEAK	2	13970.00	46.89	68.20	-21.31	28.57	39.26	21.53	43.57	1.10	100	Average	3	20955.00	38.85	74.00	-35.15	38.64	37.92	26.65	54.82	-9.54	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	13970.00	57.05	88.20	-31.15	38.73	39.26	21.53	43.57	1.10	151	PEAK																																																																				
2	13970.00	46.89	68.20	-21.31	28.57	39.26	21.53	43.57	1.10	100	Average																																																																				
3	20955.00	38.85	74.00	-35.15	38.64	37.92	26.65	54.82	-9.54	--	PEAK																																																																				
																																																																															
		Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91280_02360_241101 VERTICAL Mode : 49 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13970.00</td><td>53.54</td><td>88.20</td><td>-34.66</td><td>35.22</td><td>39.26</td><td>21.53</td><td>43.57</td><td>1.10</td><td>400</td><td>PEAK</td></tr><tr><td>2</td><td>13970.00</td><td>43.89</td><td>68.20</td><td>-24.31</td><td>25.57</td><td>39.26</td><td>21.53</td><td>43.57</td><td>1.10</td><td>400</td><td>Average</td></tr><tr><td>3</td><td>20955.00</td><td>38.86</td><td>74.00</td><td>-35.14</td><td>38.65</td><td>37.92</td><td>26.65</td><td>54.82</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13970.00	53.54	88.20	-34.66	35.22	39.26	21.53	43.57	1.10	400	PEAK	2	13970.00	43.89	68.20	-24.31	25.57	39.26	21.53	43.57	1.10	400	Average	3	20955.00	38.86	74.00	-35.14	38.65	37.92	26.65	54.82	-9.54	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	13970.00	53.54	88.20	-34.66	35.22	39.26	21.53	43.57	1.10	400	PEAK																																																																				
2	13970.00	43.89	68.20	-24.31	25.57	39.26	21.53	43.57	1.10	400	Average																																																																				
3	20955.00	38.86	74.00	-35.14	38.65	37.92	26.65	54.82	-9.54	--	PEAK																																																																				

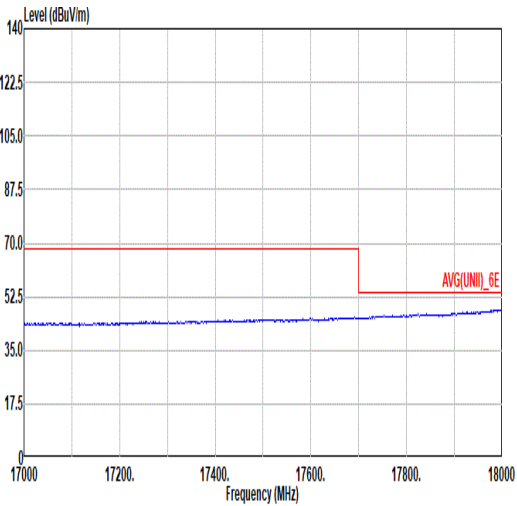
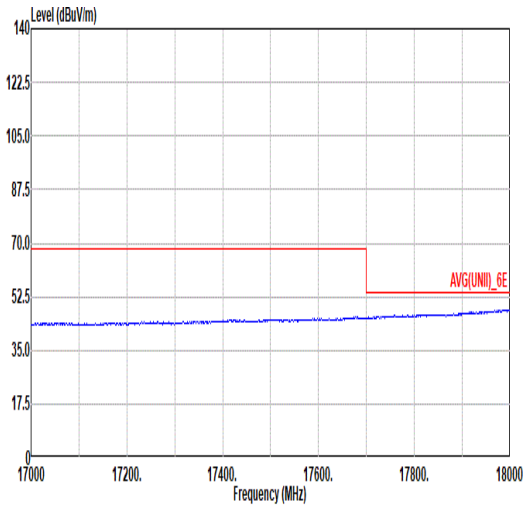
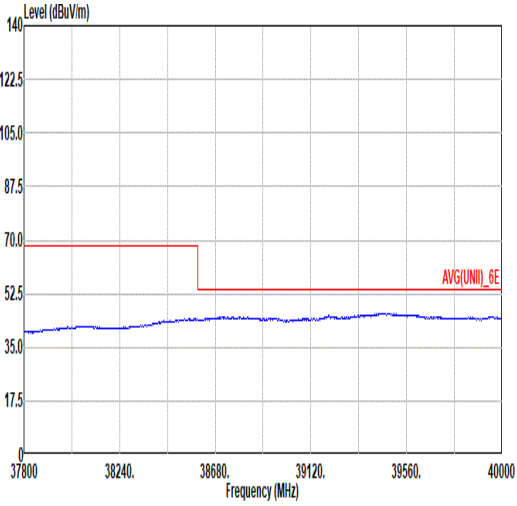
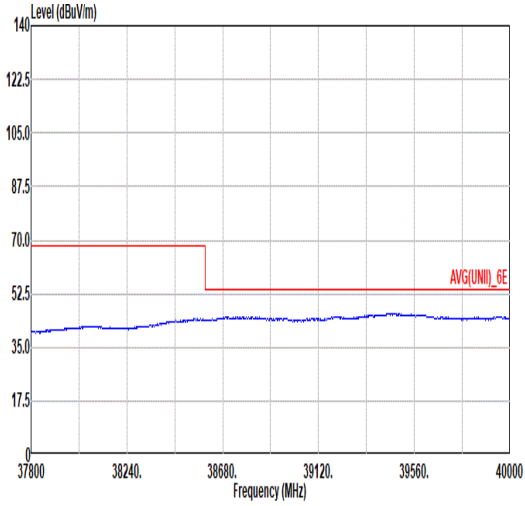


Mode	49	
	Harmonic	
	U-NII-8_6.875-7.125_802.11be EHT160_CH207_Full RU_6985MHz	
ANT	1+2+3+4	
Pol.	Horizontal	Vertical
17G ~18G Avg.	 Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91280_02360_241101 HORIZONTAL Mode : 49	 Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91280_02360_241101 VERTICAL Mode : 49
	 Site : 03CH20-HY Condition: AVG(UNII)_6E 1m 88H9170_1230_241025 HORIZONTAL Mode : 49	 Site : 03CH20-HY Condition: AVG(UNII)_6E 1m 88H9170_1230_241025 VERTICAL Mode : 49

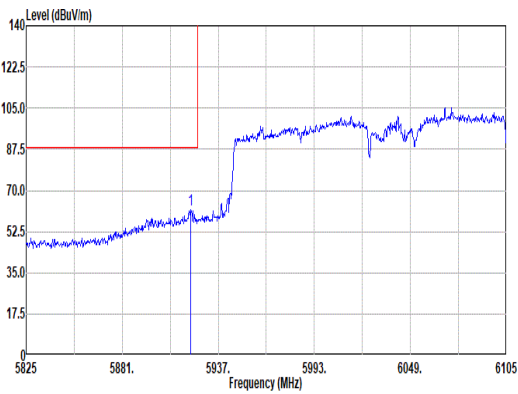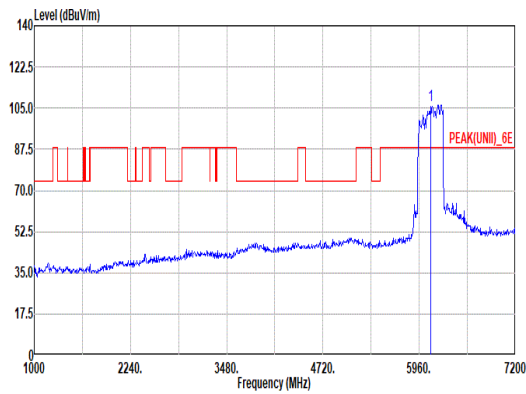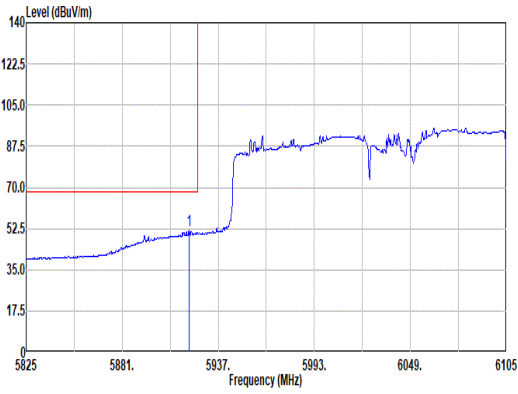
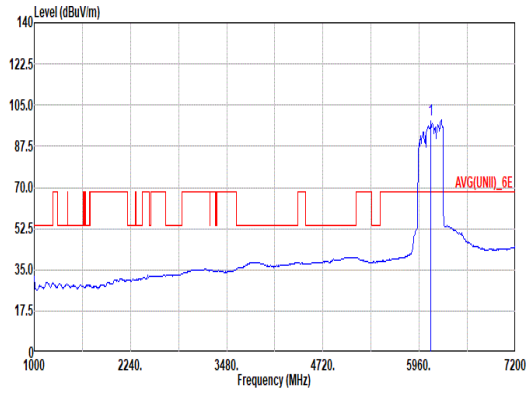


Mode	50																																																																																																		
	Band Edge																																																																																																		
	U-NII-5_5.925-6.425_802.11be EHT320_CH31_Full RU_6105MHz																																																																																																		
ANT	1+2+3+4																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5920.76</td><td>61.62</td><td>88.20</td><td>-26.58</td><td>51.30</td><td>34.30</td><td>13.95</td><td>37.93</td><td>0.00</td><td>100</td><td>128</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5920.76	61.62	88.20	-26.58	51.30	34.30	13.95	37.93	0.00	100	128	PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6105.00</td><td>106.36</td><td>-----</td><td>-----</td><td>95.63</td><td>34.38</td><td>14.29</td><td>37.94</td><td>0.00</td><td>100</td><td>128</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6105.00	106.36	-----	-----	95.63	34.38	14.29	37.94	0.00	100	128
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5920.76	61.62	88.20	-26.58	51.30	34.30	13.95	37.93	0.00	100	128	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	6105.00	106.36	-----	-----	95.63	34.38	14.29	37.94	0.00	100	128	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5919.92</td><td>51.66</td><td>68.20</td><td>-16.54</td><td>41.34</td><td>34.30</td><td>13.95</td><td>37.93</td><td>0.00</td><td>100</td><td>128</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5919.92	51.66	68.20	-16.54	41.34	34.30	13.95	37.93	0.00	100	128	AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6105.00</td><td>98.56</td><td>-----</td><td>-----</td><td>87.82</td><td>34.39</td><td>14.29</td><td>37.94</td><td>0.00</td><td>100</td><td>128</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6105.00	98.56	-----	-----	87.82	34.39	14.29	37.94	0.00	100	128
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5919.92	51.66	68.20	-16.54	41.34	34.30	13.95	37.93	0.00	100	128	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	6105.00	98.56	-----	-----	87.82	34.39	14.29	37.94	0.00	100	128	AVERAGE																																																																																							

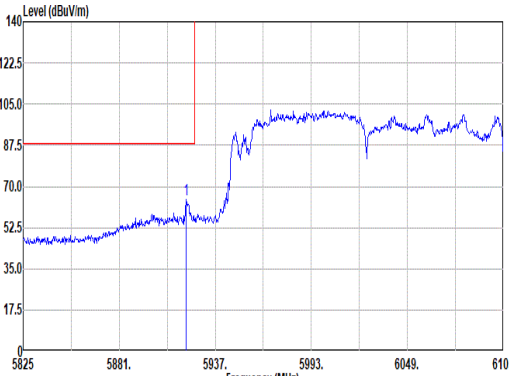
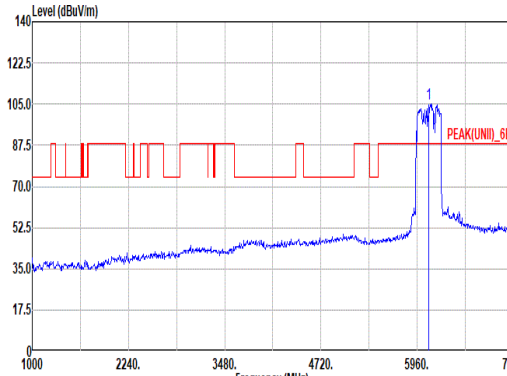
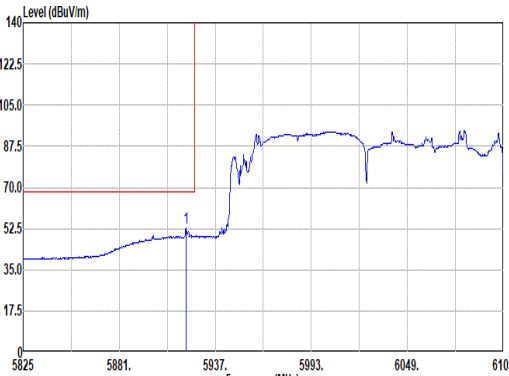
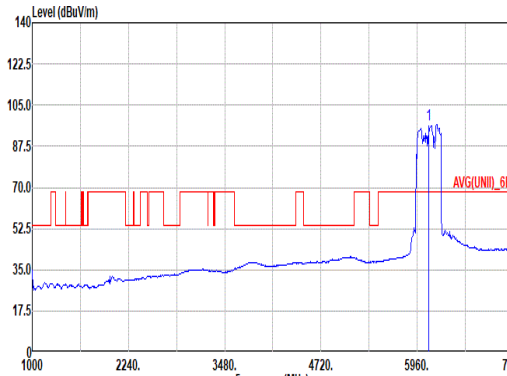


		50																																																																																																	
Mode	Band Edge																																																																																																		
	U-NII-5_5.925-6.425_802.11be EHT320_CH31_Full RU_6105MHz																																																																																																		
ANT	1+2+3+4																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5920.20</td><td>64.42</td><td>88.20</td><td>-23.78</td><td>54.10</td><td>34.30</td><td>13.95</td><td>37.93</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5920.20	64.42	88.20	-23.78	54.10	34.30	13.95	37.93	0.00	100	0	PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6105.00</td><td>105.27</td><td>-----</td><td>-----</td><td>94.85</td><td>34.17</td><td>14.19</td><td>37.94</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6105.00	105.27	-----	-----	94.85	34.17	14.19	37.94	0.00	100	0
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5920.20	64.42	88.20	-23.78	54.10	34.30	13.95	37.93	0.00	100	0	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	6105.00	105.27	-----	-----	94.85	34.17	14.19	37.94	0.00	100	0	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5920.20</td><td>52.63</td><td>68.20</td><td>-15.57</td><td>42.31</td><td>34.30</td><td>13.95</td><td>37.93</td><td>0.00</td><td>100</td><td>0</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5920.20	52.63	68.20	-15.57	42.31	34.30	13.95	37.93	0.00	100	0	AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6105.00</td><td>96.86</td><td>-----</td><td>-----</td><td>86.21</td><td>34.33</td><td>14.26</td><td>37.94</td><td>0.00</td><td>100</td><td>0</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6105.00	96.86	-----	-----	86.21	34.33	14.26	37.94	0.00	100	0
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5920.20	52.63	68.20	-15.57	42.31	34.30	13.95	37.93	0.00	100	0	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	6105.00	96.86	-----	-----	86.21	34.33	14.26	37.94	0.00	100	0	AVERAGE																																																																																							

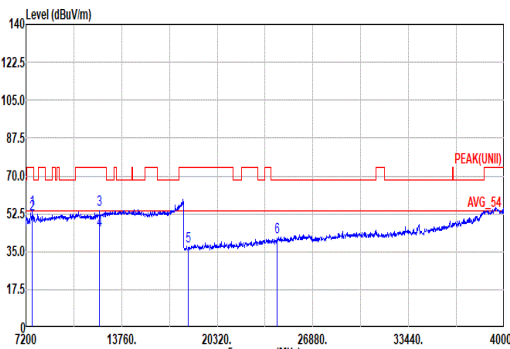
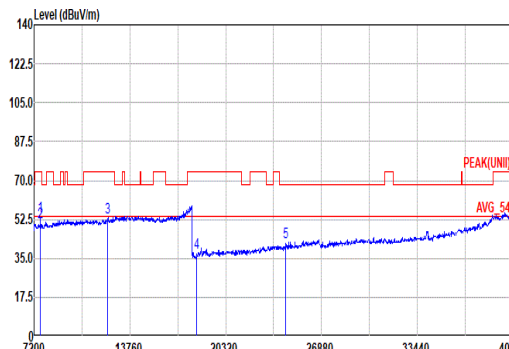


Mode	50																																																																																																																						
	Harmonic																																																																																																																						
	U-NII-5_5.925-6.425_802.11be EHT320_CH31_Full RU_6105MHz																																																																																																																						
ANT	1+2+3+4																																																																																																																						
Pol.	Horizontal																																																																																																																						
Peak Avg.																																																																																																																							
	Site : 03CH20-HY Condition: PEAK(UNII) 1m BBH9170_1230_241025 HORIZONTAL Mode : 50 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7634.00</td><td>54.62</td><td>74.00</td><td>-19.38</td><td>40.29</td><td>36.17</td><td>15.84</td><td>38.74</td><td>1.06</td><td>133</td><td>44</td><td>Peak</td></tr><tr><td>2</td><td>7634.00</td><td>52.12</td><td>54.00</td><td>-1.88</td><td>37.79</td><td>36.17</td><td>15.84</td><td>38.74</td><td>1.06</td><td>133</td><td>44</td><td>Average</td></tr><tr><td>3</td><td>12210.00</td><td>54.24</td><td>74.00</td><td>-19.76</td><td>37.23</td><td>39.20</td><td>20.08</td><td>42.90</td><td>0.63</td><td>200</td><td>66</td><td>PEAK</td></tr><tr><td>4</td><td>12210.00</td><td>44.82</td><td>54.00</td><td>-9.18</td><td>27.81</td><td>39.20</td><td>20.08</td><td>42.90</td><td>0.63</td><td>200</td><td>66</td><td>Average</td></tr><tr><td>5</td><td>18315.00</td><td>37.36</td><td>74.00</td><td>-36.64</td><td>40.06</td><td>37.86</td><td>24.79</td><td>55.81</td><td>-9.54</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>6</td><td>24420.00</td><td>41.52</td><td>68.20</td><td>-26.68</td><td>36.69</td><td>39.14</td><td>28.78</td><td>53.55</td><td>-9.54</td><td>--</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7634.00	54.62	74.00	-19.38	40.29	36.17	15.84	38.74	1.06	133	44	Peak	2	7634.00	52.12	54.00	-1.88	37.79	36.17	15.84	38.74	1.06	133	44	Average	3	12210.00	54.24	74.00	-19.76	37.23	39.20	20.08	42.90	0.63	200	66	PEAK	4	12210.00	44.82	54.00	-9.18	27.81	39.20	20.08	42.90	0.63	200	66	Average	5	18315.00	37.36	74.00	-36.64	40.06	37.86	24.79	55.81	-9.54	--	--	PEAK	6	24420.00	41.52	68.20	-26.68	36.69	39.14	28.78	53.55	-9.54	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	7634.00	54.62	74.00	-19.38	40.29	36.17	15.84	38.74	1.06	133	44	Peak																																																																																																											
2	7634.00	52.12	54.00	-1.88	37.79	36.17	15.84	38.74	1.06	133	44	Average																																																																																																											
3	12210.00	54.24	74.00	-19.76	37.23	39.20	20.08	42.90	0.63	200	66	PEAK																																																																																																											
4	12210.00	44.82	54.00	-9.18	27.81	39.20	20.08	42.90	0.63	200	66	Average																																																																																																											
5	18315.00	37.36	74.00	-36.64	40.06	37.86	24.79	55.81	-9.54	--	--	PEAK																																																																																																											
6	24420.00	41.52	68.20	-26.68	36.69	39.14	28.78	53.55	-9.54	--	--	PEAK																																																																																																											
Pol.	Vertical																																																																																																																						
Peak Avg.																																																																																																																							
	Site : 03CH20-HY Condition: PEAK(UNII) 1m BBH9170_1230_241025 VERTICAL Mode : 50 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7634.00</td><td>53.79</td><td>74.00</td><td>-20.21</td><td>39.46</td><td>36.17</td><td>15.84</td><td>38.74</td><td>1.06</td><td>200</td><td>166</td><td>Peak</td></tr><tr><td>2</td><td>7634.00</td><td>51.33</td><td>54.00</td><td>-2.67</td><td>37.00</td><td>36.17</td><td>15.84</td><td>38.74</td><td>1.06</td><td>200</td><td>166</td><td>Average</td></tr><tr><td>3</td><td>12210.00</td><td>53.25</td><td>74.00</td><td>-20.75</td><td>36.24</td><td>39.20</td><td>20.08</td><td>42.90</td><td>0.63</td><td>400</td><td>217</td><td>PEAK</td></tr><tr><td>4</td><td>18315.00</td><td>37.54</td><td>74.00</td><td>-36.46</td><td>40.24</td><td>37.86</td><td>24.79</td><td>55.81</td><td>-9.54</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>5</td><td>24420.00</td><td>42.14</td><td>68.20</td><td>-26.06</td><td>37.31</td><td>39.14</td><td>28.78</td><td>53.55</td><td>-9.54</td><td>--</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7634.00	53.79	74.00	-20.21	39.46	36.17	15.84	38.74	1.06	200	166	Peak	2	7634.00	51.33	54.00	-2.67	37.00	36.17	15.84	38.74	1.06	200	166	Average	3	12210.00	53.25	74.00	-20.75	36.24	39.20	20.08	42.90	0.63	400	217	PEAK	4	18315.00	37.54	74.00	-36.46	40.24	37.86	24.79	55.81	-9.54	--	--	PEAK	5	24420.00	42.14	68.20	-26.06	37.31	39.14	28.78	53.55	-9.54	--	--	PEAK												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	7634.00	53.79	74.00	-20.21	39.46	36.17	15.84	38.74	1.06	200	166	Peak																																																																																																											
2	7634.00	51.33	54.00	-2.67	37.00	36.17	15.84	38.74	1.06	200	166	Average																																																																																																											
3	12210.00	53.25	74.00	-20.75	36.24	39.20	20.08	42.90	0.63	400	217	PEAK																																																																																																											
4	18315.00	37.54	74.00	-36.46	40.24	37.86	24.79	55.81	-9.54	--	--	PEAK																																																																																																											
5	24420.00	42.14	68.20	-26.06	37.31	39.14	28.78	53.55	-9.54	--	--	PEAK																																																																																																											

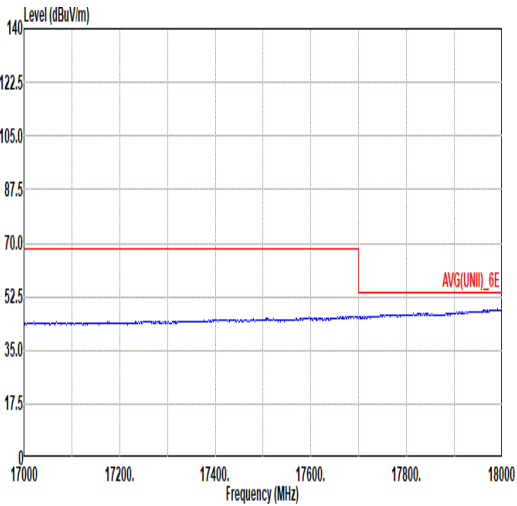
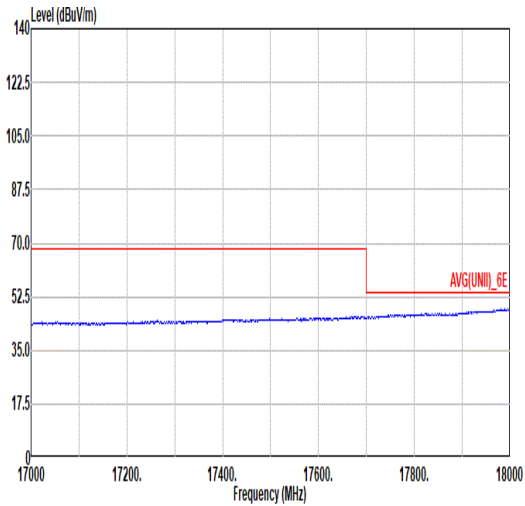
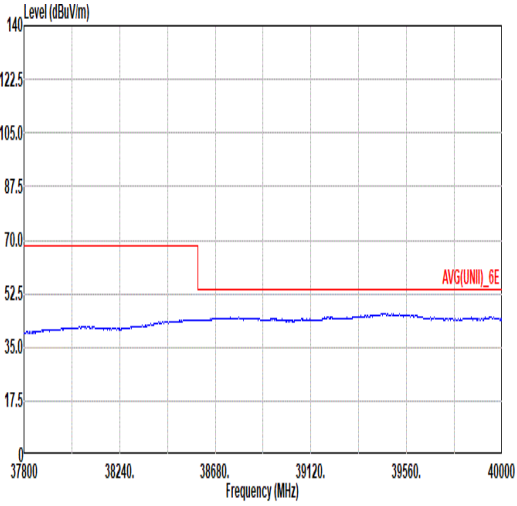
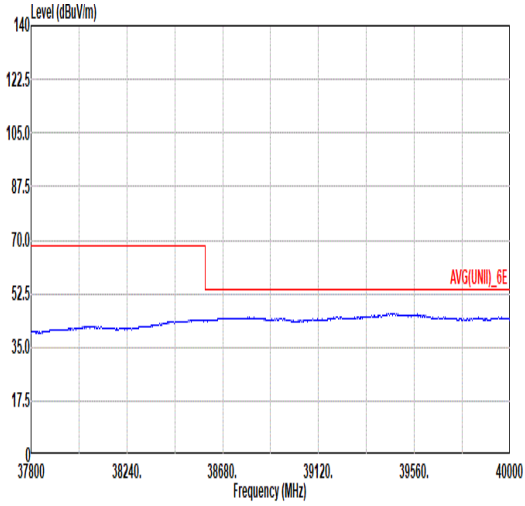


Mode	50	
	Harmonic	
	U-NII-5_5.925-6.425_802.11be EHT320_CH31_Full RU_6105MHz	
ANT	1+2+3+4	
Pol.	Horizontal	Vertical
17G ~18G Avg.	 Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL Mode : 50	 Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 VERTICAL Mode : 50
	 Site : 03CH20-HY Condition: AVG(UNII)_6E 1m 88H9170_1230_241025 HORIZONTAL Mode : 50	 Site : 03CH20-HY Condition: AVG(UNII)_6E 1m 88H9170_1230_241025 VERTICAL Mode : 50

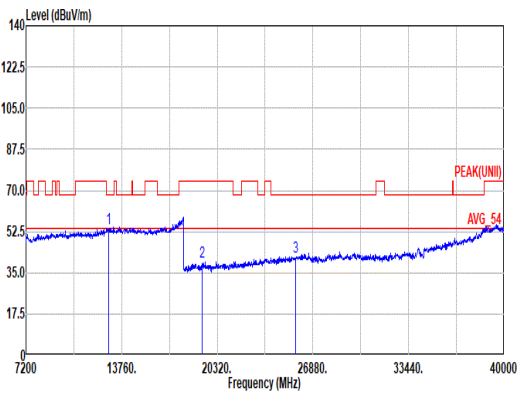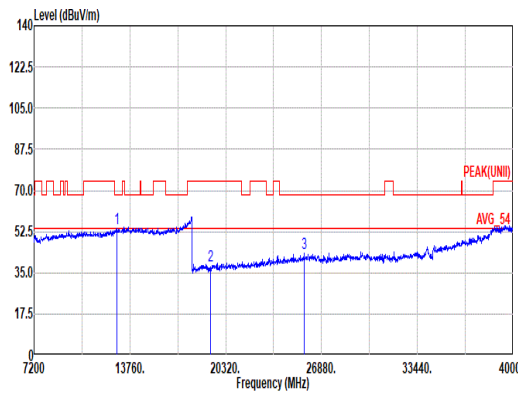



		51											
Mode	Harmonic												
	U-NII-6_6.425-6.525_802.11be EHT320_CH95_Full RU_6425MHz												
ANT	1+2+3+4												
Pol.	Horizontal						Vertical						
Peak Avg.													
	Site : 03CH20-HY												
	Condition: PEAK(UNII) 1m BBHA9170_1230_241025 HORIZONTAL												
	Mode : 51												
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	12850.00	54.03	88.20	-34.17	35.81	39.60	20.66	42.84	0.80	--	--	--	PEAK
2	19275.00	39.38	74.00	-34.62	40.45	38.20	25.46	55.19	-9.54	--	--	--	PEAK
3	25700.00	41.99	68.20	-26.21	36.12	39.00	29.51	53.10	-9.54	--	--	--	PEAK
	Site : 03CH20-HY												
	Condition: PEAK(UNII) 1m BBHA9170_1230_241025 VERTICAL												
	Mode : 51												
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	12850.00	53.90	88.20	-34.30	35.68	39.60	20.66	42.84	0.80	--	--	--	PEAK
2	19275.00	38.25	74.00	-35.75	39.32	38.20	25.46	55.19	-9.54	--	--	--	PEAK
3	25700.00	43.20	68.20	-25.00	37.33	39.00	29.51	53.10	-9.54	--	--	--	PEAK

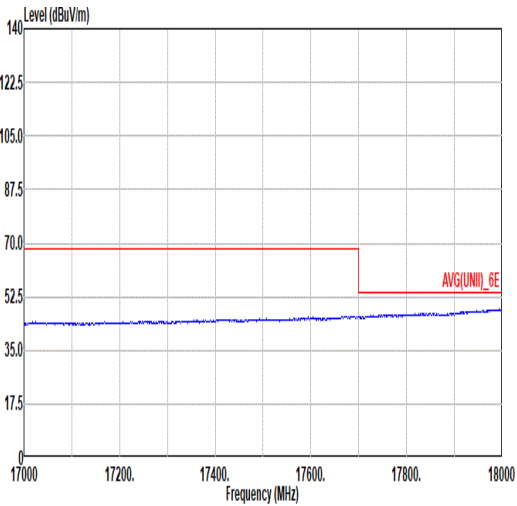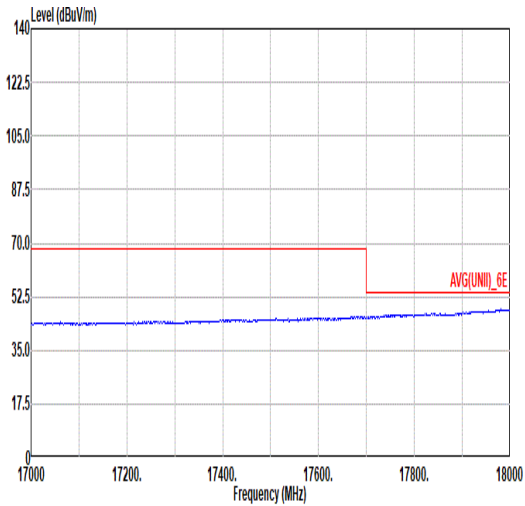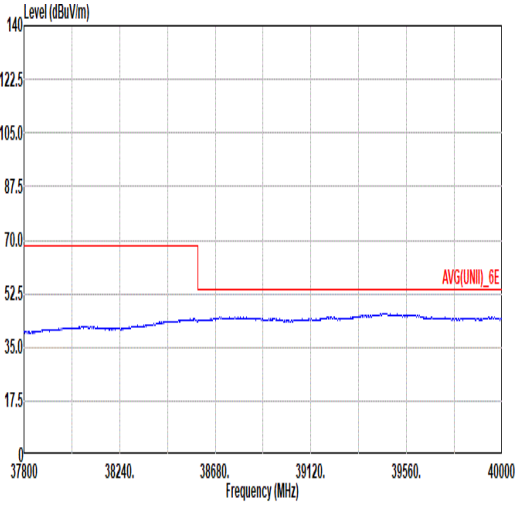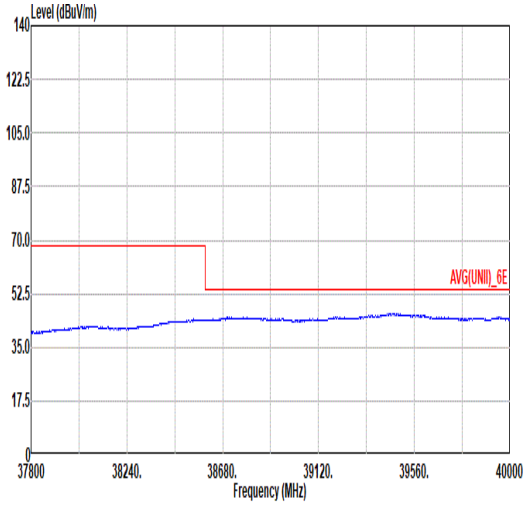





Mode	51	
	Harmonic	
	U-NII-6_6.425-6.525_802.11be EHT320_CH95_Full RU_6425MHz	
ANT	1+2+3+4	
Pol.	Horizontal	Vertical
17G ~18G Avg.	 Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL Mode : 51	 Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 VERTICAL Mode : 51
	 Site : 03CH20-HY Condition: AVG(UNII)_6E 1m 88H9170_1230_241025 HORIZONTAL Mode : 51	 Site : 03CH20-HY Condition: AVG(UNII)_6E 1m 88H9170_1230_241025 VERTICAL Mode : 51

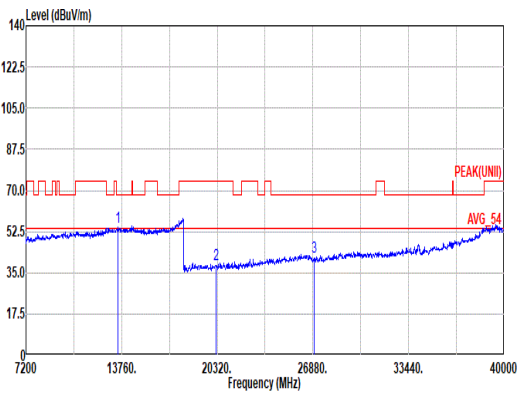





		52																																																																																				
Mode		Harmonic																																																																																				
		U-NII-7_6.525-6.875_802.11be EHT320_CH159_Full RU_6745MHz																																																																																				
ANT		1+2+3+4																																																																																				
Pol.		Horizontal							Vertical																																																																													
Peak Avg.																																																																																						
	Site : 03CH20-HY Condition: PEAK(UNII) 1m BBHA9170_1230_241025 HORIZONTAL Mode : 52																																																																																					
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>13490.00</td><td>54.44</td><td>88.20</td><td>-33.76</td><td>35.88</td><td>39.70</td><td>21.17</td><td>43.28</td><td>0.97</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>20235.00</td><td>38.48</td><td>74.00</td><td>-35.52</td><td>38.00</td><td>38.10</td><td>26.12</td><td>55.00</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>26980.00</td><td>41.58</td><td>68.20</td><td>-26.62</td><td>34.77</td><td>39.30</td><td>30.54</td><td>53.49</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr></table>																	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	13490.00	54.44	88.20	-33.76	35.88	39.70	21.17	43.28	0.97	--	--	--	PEAK	2	20235.00	38.48	74.00	-35.52	38.00	38.10	26.12	55.00	-9.54	--	--	--	PEAK	3	26980.00	41.58	68.20	-26.62	34.77	39.30	30.54	53.49	-9.54	--	--	--	PEAK
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	13490.00	54.44	88.20	-33.76	35.88	39.70	21.17	43.28	0.97	--	--	--	PEAK																																																																									
2	20235.00	38.48	74.00	-35.52	38.00	38.10	26.12	55.00	-9.54	--	--	--	PEAK																																																																									
3	26980.00	41.58	68.20	-26.62	34.77	39.30	30.54	53.49	-9.54	--	--	--	PEAK																																																																									
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>13490.00</td><td>54.44</td><td>88.20</td><td>-33.76</td><td>35.88</td><td>39.70</td><td>21.17</td><td>43.28</td><td>0.97</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>20235.00</td><td>38.48</td><td>74.00</td><td>-35.52</td><td>38.00</td><td>38.10</td><td>26.12</td><td>55.00</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>26980.00</td><td>41.58</td><td>68.20</td><td>-26.62</td><td>34.77</td><td>39.30</td><td>30.54</td><td>53.49</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr></table>																	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	13490.00	54.44	88.20	-33.76	35.88	39.70	21.17	43.28	0.97	--	--	--	PEAK	2	20235.00	38.48	74.00	-35.52	38.00	38.10	26.12	55.00	-9.54	--	--	--	PEAK	3	26980.00	41.58	68.20	-26.62	34.77	39.30	30.54	53.49	-9.54	--	--	--	PEAK	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	13490.00	54.44	88.20	-33.76	35.88	39.70	21.17	43.28	0.97	--	--	--	PEAK																																																																									
2	20235.00	38.48	74.00	-35.52	38.00	38.10	26.12	55.00	-9.54	--	--	--	PEAK																																																																									
3	26980.00	41.58	68.20	-26.62	34.77	39.30	30.54	53.49	-9.54	--	--	--	PEAK																																																																									

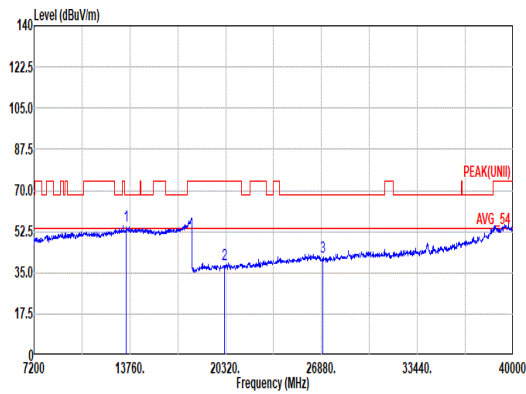Peak Avg.																																																																																						
	Site : 03CH20-HY Condition: PEAK(UNII) 1m BBHA9170_1230_241025 VERTICAL Mode : 52																																																																																					
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>13490.00</td><td>54.83</td><td>88.20</td><td>-33.37</td><td>36.27</td><td>39.70</td><td>21.17</td><td>43.28</td><td>0.97</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>20235.00</td><td>38.37</td><td>74.00</td><td>-35.63</td><td>38.69</td><td>38.10</td><td>26.12</td><td>55.00</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>26980.00</td><td>41.70</td><td>68.20</td><td>-26.50</td><td>34.89</td><td>39.30</td><td>30.54</td><td>53.49</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr></table>																	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	13490.00	54.83	88.20	-33.37	36.27	39.70	21.17	43.28	0.97	--	--	--	PEAK	2	20235.00	38.37	74.00	-35.63	38.69	38.10	26.12	55.00	-9.54	--	--	--	PEAK	3	26980.00	41.70	68.20	-26.50	34.89	39.30	30.54	53.49	-9.54	--	--	--	PEAK
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	13490.00	54.83	88.20	-33.37	36.27	39.70	21.17	43.28	0.97	--	--	--	PEAK																																																																									
2	20235.00	38.37	74.00	-35.63	38.69	38.10	26.12	55.00	-9.54	--	--	--	PEAK																																																																									
3	26980.00	41.70	68.20	-26.50	34.89	39.30	30.54	53.49	-9.54	--	--	--	PEAK																																																																									
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>13490.00</td><td>54.83</td><td>88.20</td><td>-33.37</td><td>36.27</td><td>39.70</td><td>21.17</td><td>43.28</td><td>0.97</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>20235.00</td><td>38.37</td><td>74.00</td><td>-35.63</td><td>38.69</td><td>38.10</td><td>26.12</td><td>55.00</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>26980.00</td><td>41.70</td><td>68.20</td><td>-26.50</td><td>34.89</td><td>39.30</td><td>30.54</td><td>53.49</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr></table>																	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	13490.00	54.83	88.20	-33.37	36.27	39.70	21.17	43.28	0.97	--	--	--	PEAK	2	20235.00	38.37	74.00	-35.63	38.69	38.10	26.12	55.00	-9.54	--	--	--	PEAK	3	26980.00	41.70	68.20	-26.50	34.89	39.30	30.54	53.49	-9.54	--	--	--	PEAK	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	13490.00	54.83	88.20	-33.37	36.27	39.70	21.17	43.28	0.97	--	--	--	PEAK																																																																									
2	20235.00	38.37	74.00	-35.63	38.69	38.10	26.12	55.00	-9.54	--	--	--	PEAK																																																																									
3	26980.00	41.70	68.20	-26.50	34.89	39.30	30.54	53.49	-9.54	--	--	--	PEAK																																																																									

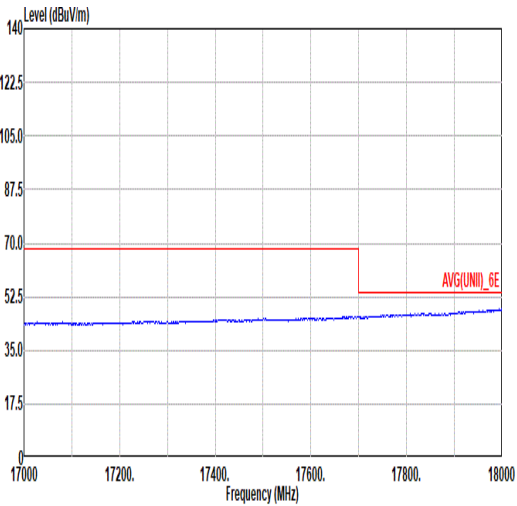
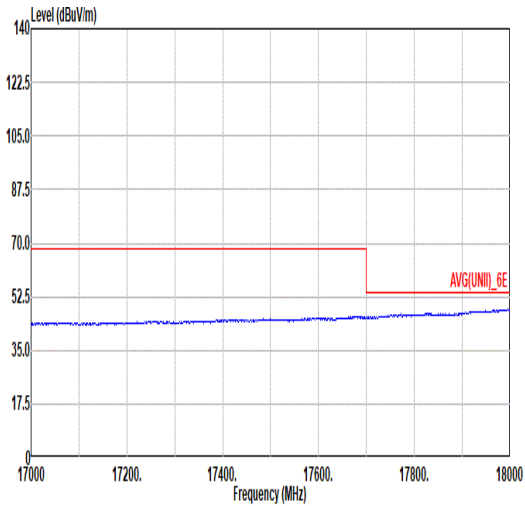
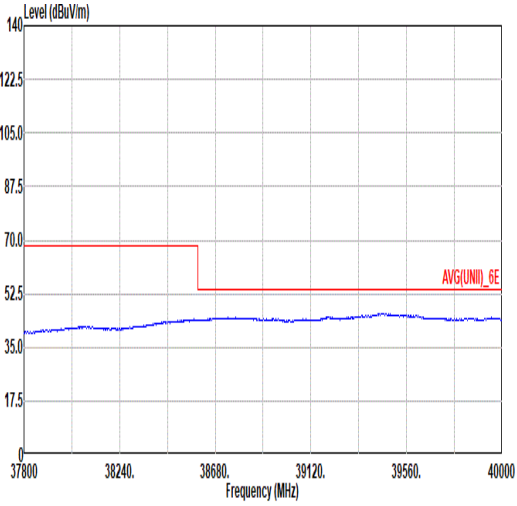
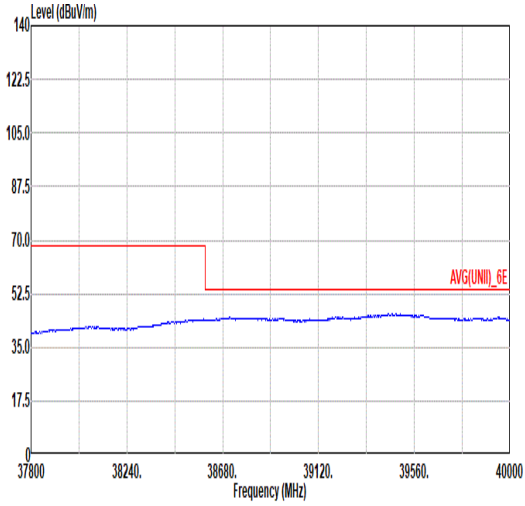


Mode	52	
	Harmonic	
	U-NII-7_6.525-6.875_802.11be EHT320_CH159_Full RU_6745MHz	
ANT	1+2+3+4	
Pol.	Horizontal	Vertical
17G ~18G Avg.	 Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91280_02360_241101 HORIZONTAL Mode : 52	 Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91280_02360_241101 VERTICAL Mode : 52
	 Site : 03CH20-HY Condition: AVG(UNII)_6E 1m 88H9170_1230_241025 HORIZONTAL Mode : 52	 Site : 03CH20-HY Condition: AVG(UNII)_6E 1m 88H9170_1230_241025 VERTICAL Mode : 52

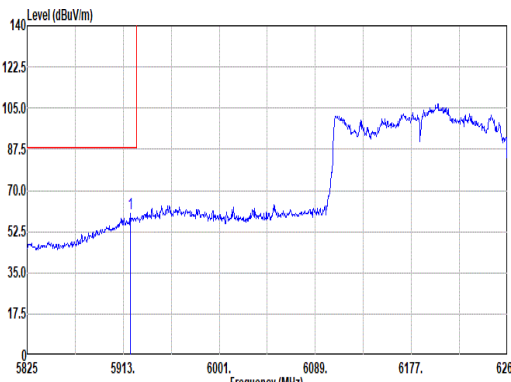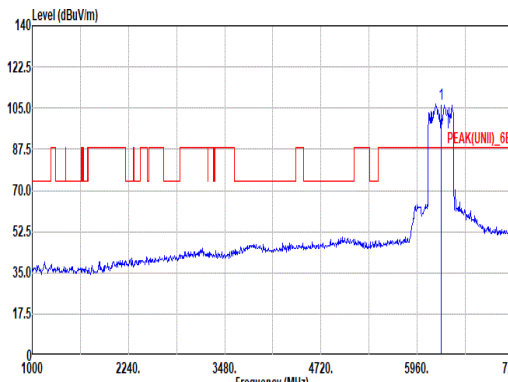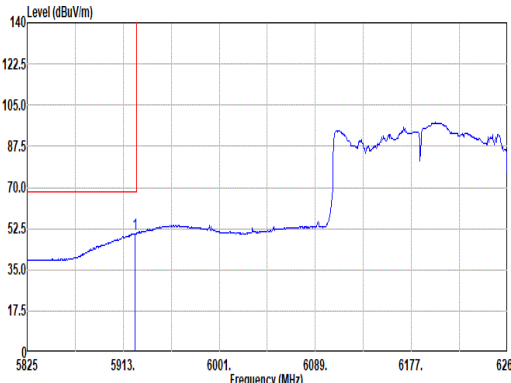
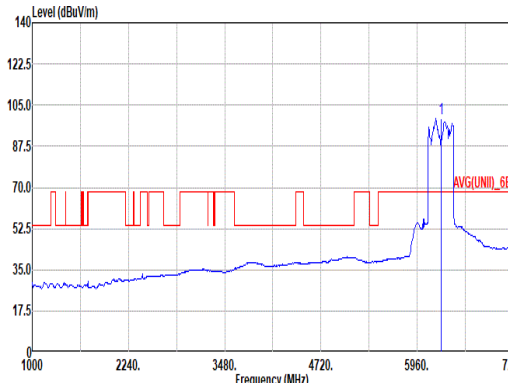


		53																																																																																																	
Mode	Band Edge																																																																																																		
	U-NII-5_5.925-6.425_802.11be EHT320_CH63_Full RU_6265MHz																																																																																																		
ANT	1+2+3+4																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5919.00</td><td>59.98</td><td>88.20</td><td>-28.22</td><td>49.66</td><td>34.30</td><td>13.95</td><td>37.93</td><td>0.00</td><td>200</td><td>10</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5919.00	59.98	88.20	-28.22	49.66	34.30	13.95	37.93	0.00	200	10	PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6265.00</td><td>106.89</td><td>-----</td><td>-----</td><td>96.28</td><td>34.30</td><td>14.25</td><td>37.94</td><td>0.00</td><td>200</td><td>10</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6265.00	106.89	-----	-----	96.28	34.30	14.25	37.94	0.00	200	10
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5919.00	59.98	88.20	-28.22	49.66	34.30	13.95	37.93	0.00	200	10	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	6265.00	106.89	-----	-----	96.28	34.30	14.25	37.94	0.00	200	10	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5924.00</td><td>50.42</td><td>68.20</td><td>-17.78</td><td>40.09</td><td>34.30</td><td>13.96</td><td>37.93</td><td>0.00</td><td>200</td><td>10</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.00	50.42	68.20	-17.78	40.09	34.30	13.96	37.93	0.00	200	10	AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6265.00</td><td>99.12</td><td>-----</td><td>-----</td><td>88.51</td><td>34.30</td><td>14.25</td><td>37.94</td><td>0.00</td><td>200</td><td>10</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6265.00	99.12	-----	-----	88.51	34.30	14.25	37.94	0.00	200	10
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5924.00	50.42	68.20	-17.78	40.09	34.30	13.96	37.93	0.00	200	10	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	6265.00	99.12	-----	-----	88.51	34.30	14.25	37.94	0.00	200	10	AVERAGE																																																																																							

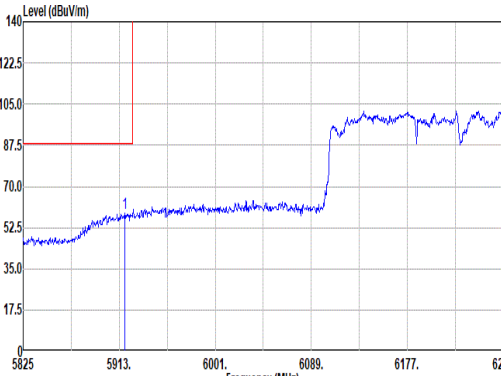
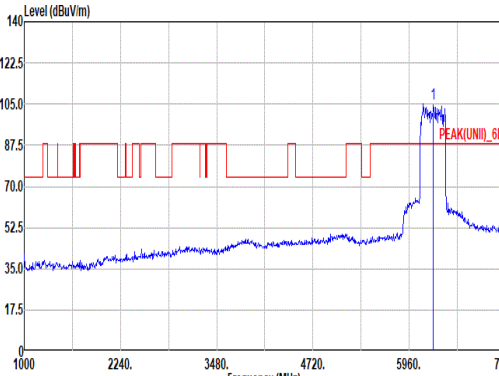
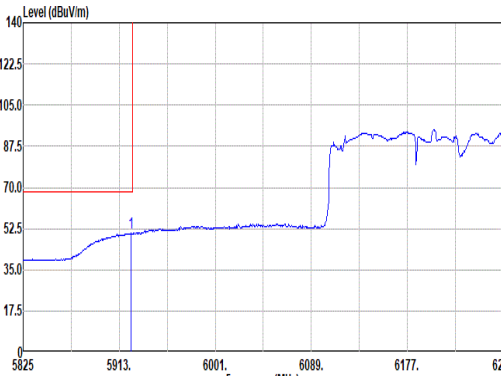
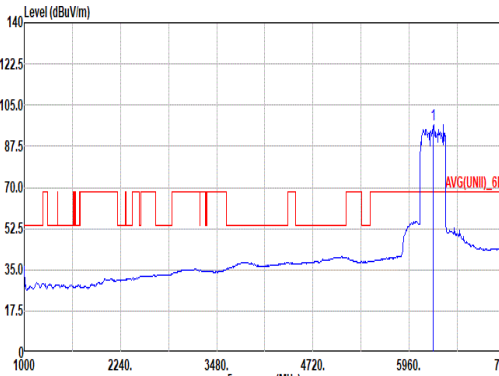


		53																																																																																														
Mode	Band Edge																																																																																															
	U-NII-5_5.925-6.425_802.11be EHT320_CH63_Full RU_6265MHz																																																																																															
ANT	1+2+3+4																																																																																															
Pol.	Vertical						Fundamental																																																																																									
Peak																																																																																																
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5917.04</td><td>58.38</td><td>88.20</td><td>-29.82</td><td>48.06</td><td>34.30</td><td>13.95</td><td>37.93</td><td>0.00</td><td>100</td><td>73 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5917.04	58.38	88.20	-29.82	48.06	34.30	13.95	37.93	0.00	100	73 PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6265.00</td><td>104.95</td><td>-----</td><td>-----</td><td>94.51</td><td>34.18</td><td>14.20</td><td>37.94</td><td>0.00</td><td>100</td><td>73 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6265.00	104.95	-----	-----	94.51	34.18	14.20	37.94	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5917.04	58.38	88.20	-29.82	48.06	34.30	13.95	37.93	0.00	100	73 PEAK																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	6265.00	104.95	-----	-----	94.51	34.18	14.20	37.94	0.00	100	73 PEAK																																																																																					
Avg.																																																																																																
	Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5923.56</td><td>50.46</td><td>68.20</td><td>-17.74</td><td>40.13</td><td>34.30</td><td>13.96</td><td>37.93</td><td>0.00</td><td>100</td><td>73 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5923.56	50.46	68.20	-17.74	40.13	34.30	13.96	37.93	0.00	100	73 AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6265.00</td><td>96.90</td><td>-----</td><td>-----</td><td>86.07</td><td>34.46</td><td>14.32</td><td>37.95</td><td>0.00</td><td>100</td><td>73 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6265.00	96.90	-----	-----	86.07	34.46	14.32	37.95	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5923.56	50.46	68.20	-17.74	40.13	34.30	13.96	37.93	0.00	100	73 AVERAGE																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	6265.00	96.90	-----	-----	86.07	34.46	14.32	37.95	0.00	100	73 AVERAGE																																																																																					

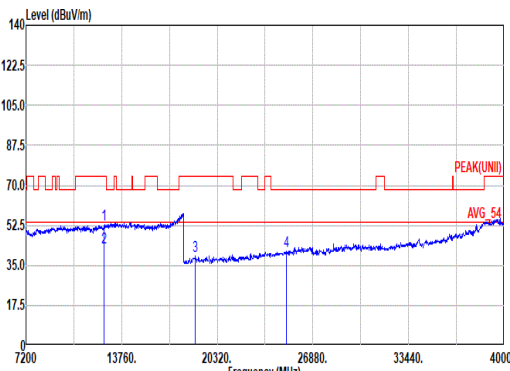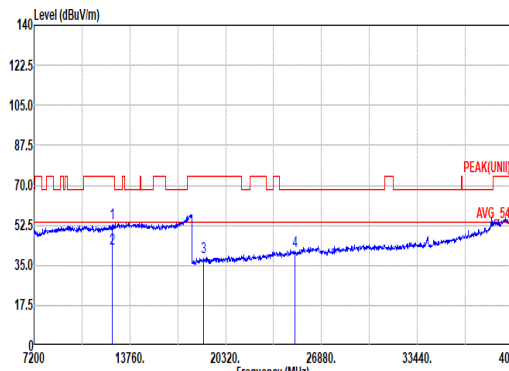


Mode	53																																																																																																																																																															
	Harmonic																																																																																																																																																															
	U-NII-5_5.925-6.425_802.11be EHT320_CH63_Full RU_6265MHz																																																																																																																																																															
ANT	1+2+3+4																																																																																																																																																															
Pol.	Horizontal	Vertical																																																																																																																																																														
Peak																																																																																																																																																																
Avg.	Site : 03CH20-HY Condition: PEAK(UNII) 1m BBHA9170_1230_241025 HORIZONTAL Mode : 53 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 12530.00</td><td>53.09</td><td>74.00</td><td>-20.91</td><td>35.88</td><td>39.06</td><td>20.37</td><td>42.93</td><td>0.71</td><td>100</td><td>56</td><td>PEAK</td></tr><tr><td>2 12530.00</td><td>42.54</td><td>54.00</td><td>-11.46</td><td>25.33</td><td>39.06</td><td>20.37</td><td>42.93</td><td>0.71</td><td>100</td><td>56</td><td>Average</td></tr><tr><td>3 18795.00</td><td>38.89</td><td>74.00</td><td>-35.11</td><td>40.56</td><td>38.20</td><td>25.13</td><td>55.46</td><td>-9.54</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>4 25060.00</td><td>41.35</td><td>68.20</td><td>-26.85</td><td>35.65</td><td>39.30</td><td>29.13</td><td>53.19</td><td>-9.54</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 12530.00	53.09	74.00	-20.91	35.88	39.06	20.37	42.93	0.71	100	56	PEAK	2 12530.00	42.54	54.00	-11.46	25.33	39.06	20.37	42.93	0.71	100	56	Average	3 18795.00	38.89	74.00	-35.11	40.56	38.20	25.13	55.46	-9.54	--	--	PEAK	4 25060.00	41.35	68.20	-26.85	35.65	39.30	29.13	53.19	-9.54	--	--	PEAK	Site : 03CH20-HY Condition: PEAK(UNII) 1m BBHA9170_1230_241025 VERTICAL Mode : 53 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 12530.00</td><td>53.22</td><td>74.00</td><td>-20.78</td><td>36.01</td><td>39.06</td><td>20.37</td><td>42.93</td><td>0.71</td><td>300</td><td>70</td><td>PEAK</td></tr><tr><td>2 12530.00</td><td>42.34</td><td>54.00</td><td>-11.66</td><td>25.13</td><td>39.06</td><td>20.37</td><td>42.93</td><td>0.71</td><td>300</td><td>70</td><td>Average</td></tr><tr><td>3 18795.00</td><td>38.37</td><td>74.00</td><td>-35.63</td><td>40.04</td><td>38.20</td><td>25.13</td><td>55.46</td><td>-9.54</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>4 25060.00</td><td>41.46</td><td>68.20</td><td>-26.74</td><td>35.76</td><td>39.30</td><td>29.13</td><td>53.19</td><td>-9.54</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 12530.00	53.22	74.00	-20.78	36.01	39.06	20.37	42.93	0.71	300	70	PEAK	2 12530.00	42.34	54.00	-11.66	25.13	39.06	20.37	42.93	0.71	300	70	Average	3 18795.00	38.37	74.00	-35.63	40.04	38.20	25.13	55.46	-9.54	--	--	PEAK	4 25060.00	41.46	68.20	-26.74	35.76	39.30	29.13	53.19	-9.54	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																						
1 12530.00	53.09	74.00	-20.91	35.88	39.06	20.37	42.93	0.71	100	56	PEAK																																																																																																																																																					
2 12530.00	42.54	54.00	-11.46	25.33	39.06	20.37	42.93	0.71	100	56	Average																																																																																																																																																					
3 18795.00	38.89	74.00	-35.11	40.56	38.20	25.13	55.46	-9.54	--	--	PEAK																																																																																																																																																					
4 25060.00	41.35	68.20	-26.85	35.65	39.30	29.13	53.19	-9.54	--	--	PEAK																																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																						
1 12530.00	53.22	74.00	-20.78	36.01	39.06	20.37	42.93	0.71	300	70	PEAK																																																																																																																																																					
2 12530.00	42.34	54.00	-11.66	25.13	39.06	20.37	42.93	0.71	300	70	Average																																																																																																																																																					
3 18795.00	38.37	74.00	-35.63	40.04	38.20	25.13	55.46	-9.54	--	--	PEAK																																																																																																																																																					
4 25060.00	41.46	68.20	-26.74	35.76	39.30	29.13	53.19	-9.54	--	--	PEAK																																																																																																																																																					

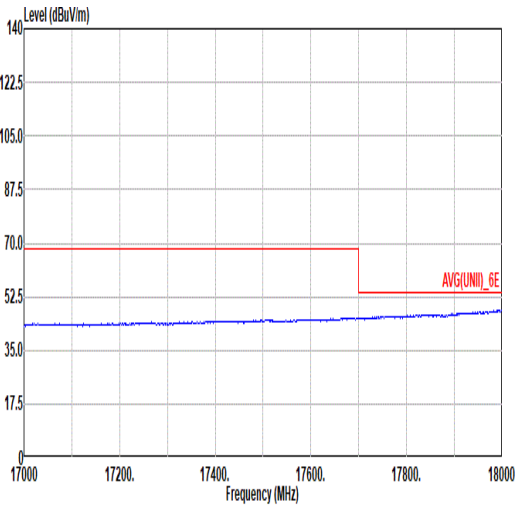
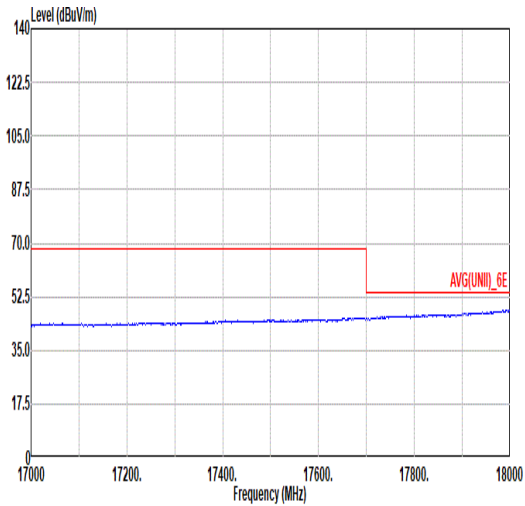
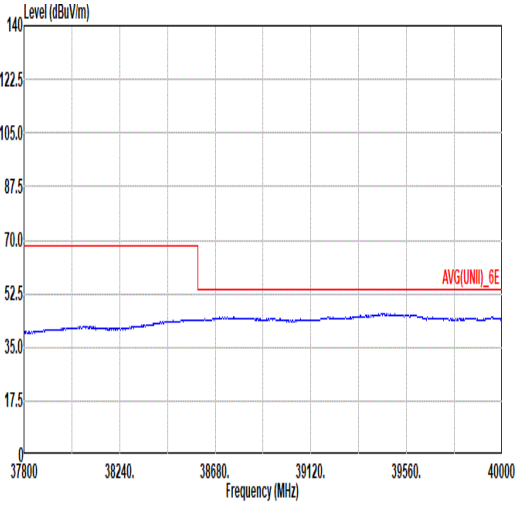
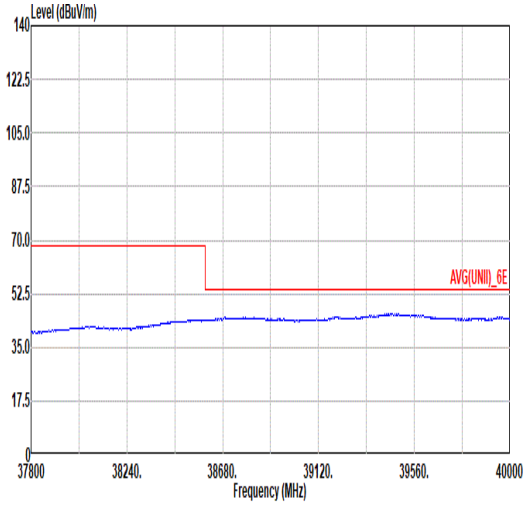


Mode	53	
	Harmonic	
	U-NII-5_5.925-6.425_802.11be EHT320_CH63_Full RU_6265MHz	
ANT	1+2+3+4	
Pol.	Horizontal	Vertical
17G ~18G Avg.	 Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91280_02360_241101 HORIZONTAL Mode : 53	 Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91280_02360_241101 VERTICAL Mode : 53
	 Site : 03CH20-HY Condition: AVG(UNII)_6E 1m 88H9170_1230_241025 HORIZONTAL Mode : 53	 Site : 03CH20-HY Condition: AVG(UNII)_6E 1m 88H9170_1230_241025 VERTICAL Mode : 53




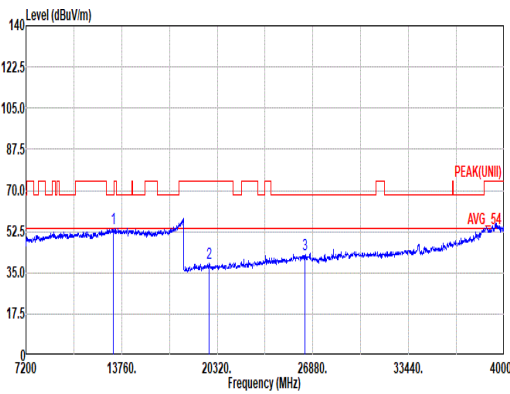


		54																																																																																			
Mode	Harmonic																																																																																				
	U-NII-7_6.525-6.875_802.11be EHT320_CH127_Full RU_6585MHz																																																																																				
ANT	1+2+3+4																																																																																				
Pol.	Horizontal										Vertical																																																																										
Peak Avg.																																																																																					
	Site : 03CH20-HY Condition: PEAK(UNII) 1m BBHA9170_1230_241025 HORIZONTAL Mode : 54																																																																																				
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>13170.00</td><td>53.74</td><td>88.20</td><td>-34.46</td><td>35.33</td><td>39.56</td><td>20.93</td><td>42.97</td><td>0.89</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>19755.00</td><td>38.97</td><td>74.00</td><td>-35.03</td><td>39.59</td><td>38.19</td><td>25.78</td><td>55.05</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>26340.00</td><td>42.60</td><td>68.20</td><td>-25.60</td><td>36.11</td><td>39.28</td><td>29.99</td><td>53.24</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr></table>																Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	13170.00	53.74	88.20	-34.46	35.33	39.56	20.93	42.97	0.89	--	--	--	PEAK	2	19755.00	38.97	74.00	-35.03	39.59	38.19	25.78	55.05	-9.54	--	--	--	PEAK	3	26340.00	42.60	68.20	-25.60	36.11	39.28	29.99	53.24	-9.54	--	--	--	PEAK
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1	13170.00	53.74	88.20	-34.46	35.33	39.56	20.93	42.97	0.89	--	--	--	PEAK																																																																								
2	19755.00	38.97	74.00	-35.03	39.59	38.19	25.78	55.05	-9.54	--	--	--	PEAK																																																																								
3	26340.00	42.60	68.20	-25.60	36.11	39.28	29.99	53.24	-9.54	--	--	--	PEAK																																																																								
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>13170.00</td><td>53.09</td><td>88.20</td><td>-35.11</td><td>34.68</td><td>39.56</td><td>20.93</td><td>42.97</td><td>0.89</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>19755.00</td><td>38.63</td><td>74.00</td><td>-35.37</td><td>39.25</td><td>38.19</td><td>25.78</td><td>55.05</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>26340.00</td><td>42.84</td><td>68.20</td><td>-25.36</td><td>36.35</td><td>39.28</td><td>29.99</td><td>53.24</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr></table>																Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	13170.00	53.09	88.20	-35.11	34.68	39.56	20.93	42.97	0.89	--	--	--	PEAK	2	19755.00	38.63	74.00	-35.37	39.25	38.19	25.78	55.05	-9.54	--	--	--	PEAK	3	26340.00	42.84	68.20	-25.36	36.35	39.28	29.99	53.24	-9.54	--	--	--	PEAK	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1	13170.00	53.09	88.20	-35.11	34.68	39.56	20.93	42.97	0.89	--	--	--	PEAK																																																																								
2	19755.00	38.63	74.00	-35.37	39.25	38.19	25.78	55.05	-9.54	--	--	--	PEAK																																																																								
3	26340.00	42.84	68.20	-25.36	36.35	39.28	29.99	53.24	-9.54	--	--	--	PEAK																																																																								

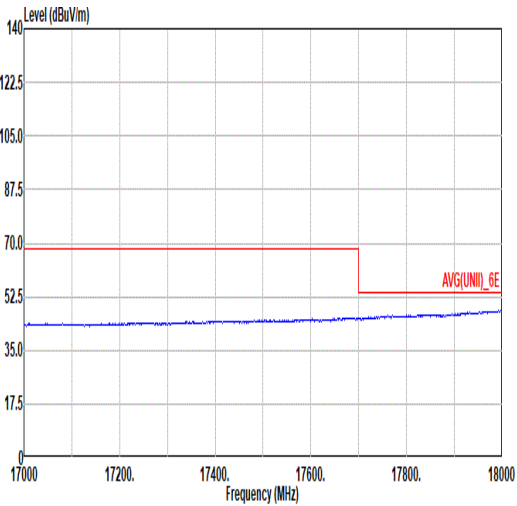
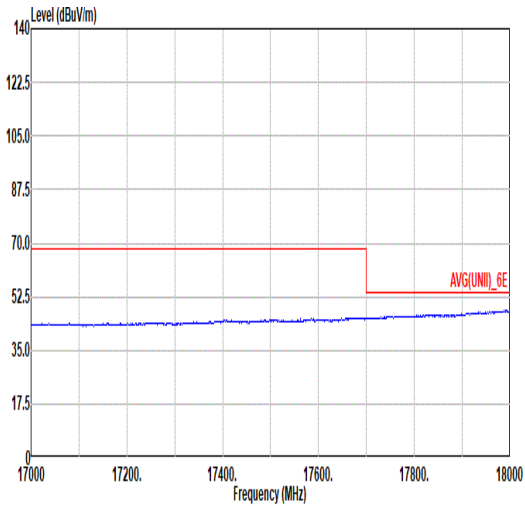
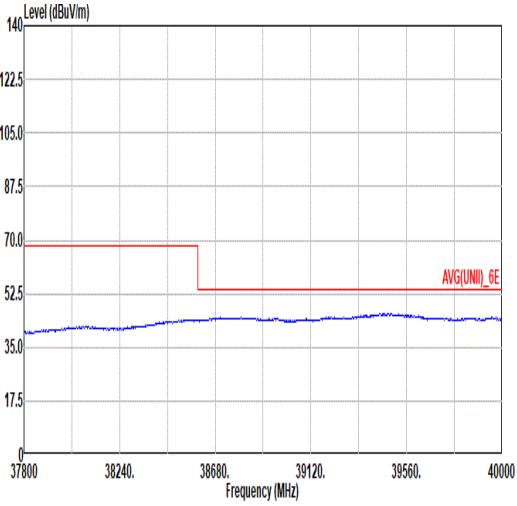
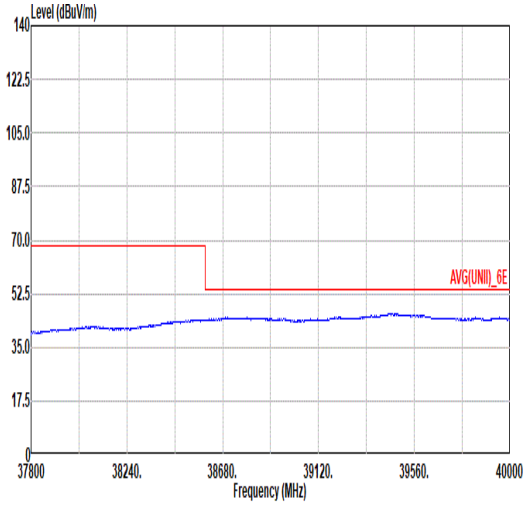


Mode	54	
	Harmonic	
	U-NII-7_6.525-6.875_802.11be EHT320_CH127_Full RU_6585MHz	
ANT	1+2+3+4	
Pol.	Horizontal	Vertical
17G ~18G Avg.	 Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91280_02360_241101 HORIZONTAL Mode : 54	 Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91280_02360_241101 VERTICAL Mode : 54
	 Site : 03CH20-HY Condition: AVG(UNII)_6E 1m 88H9170_1230_241025 HORIZONTAL Mode : 54	 Site : 03CH20-HY Condition: AVG(UNII)_6E 1m 88H9170_1230_241025 VERTICAL Mode : 54

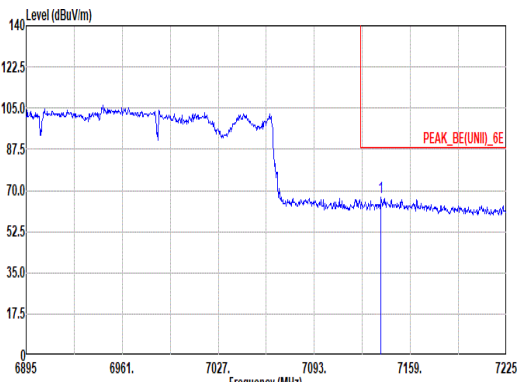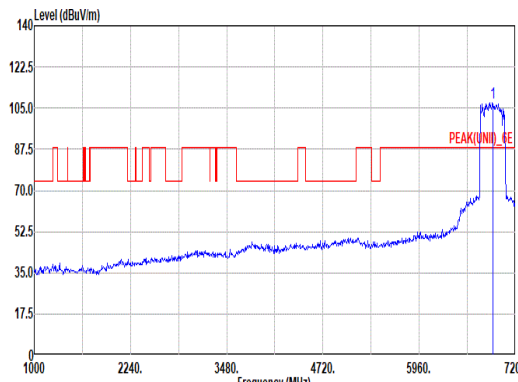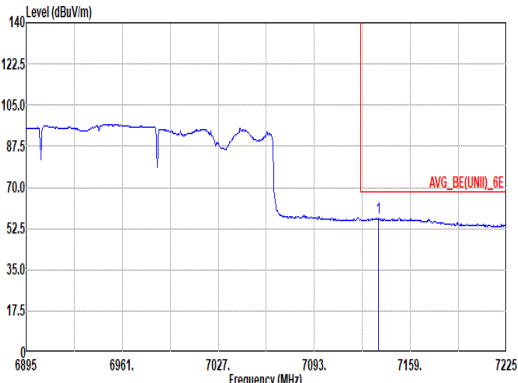
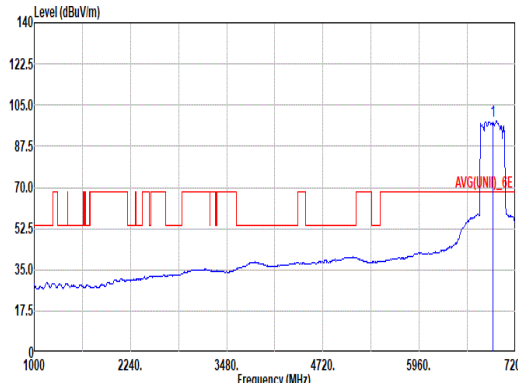


Mode	55																																																																																								
	Band Edge																																																																																								
	U-NII-8_6.875-7.125_802.11be EHT320_CH191_Full RU_6905MHz																																																																																								
ANT	1+2+3+4																																																																																								
Pol.	Horizontal					Fundamental																																																																																			
Peak																																																																																									
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 7138.87</td><td>66.90</td><td>88.20 -21.30</td><td>53.35</td><td>36.61</td><td>15.27</td><td>38.33</td><td>0.00</td><td>200</td><td>0 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 7138.87	66.90	88.20 -21.30	53.35	36.61	15.27	38.33	0.00	200	0 PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 6905.00</td><td>107.35</td><td>-----</td><td>94.68</td><td>35.00</td><td>15.01</td><td>38.14</td><td>0.00</td><td>200</td><td>0 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 6905.00	107.35	-----	94.68	35.00	15.01	38.14	0.00	200
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																			
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 7138.87	66.90	88.20 -21.30	53.35	36.61	15.27	38.33	0.00	200	0 PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																			
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6905.00	107.35	-----	94.68	35.00	15.01	38.14	0.00	200	0 PEAK																																																																																
Avg.																																																																																									
	Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 7137.22</td><td>56.97</td><td>68.20 -11.23</td><td>43.44</td><td>36.60</td><td>15.26</td><td>38.33</td><td>0.00</td><td>200</td><td>0 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 7137.22	56.97	68.20 -11.23	43.44	36.60	15.26	38.33	0.00	200	0 AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 6905.00</td><td>98.06</td><td>-----</td><td>85.34</td><td>35.83</td><td>15.08</td><td>38.19</td><td>0.00</td><td>200</td><td>0 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 6905.00	98.06	-----	85.34	35.83	15.08	38.19	0.00	200
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																			
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 7137.22	56.97	68.20 -11.23	43.44	36.60	15.26	38.33	0.00	200	0 AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																			
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6905.00	98.06	-----	85.34	35.83	15.08	38.19	0.00	200	0 AVERAGE																																																																																

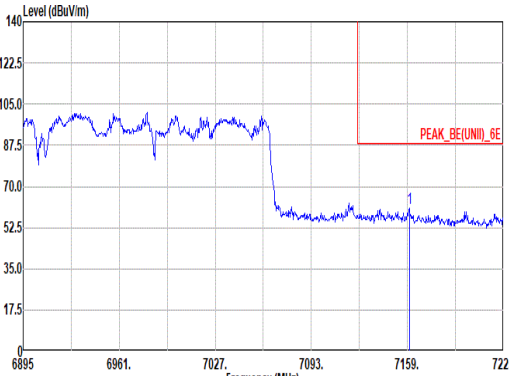
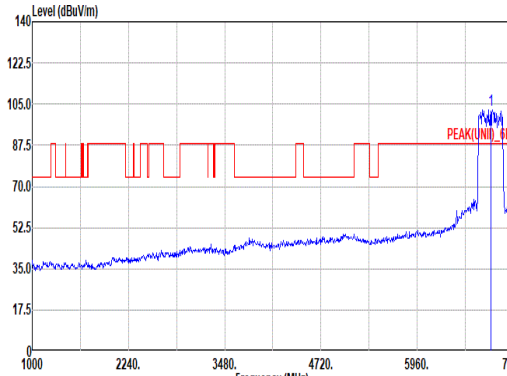
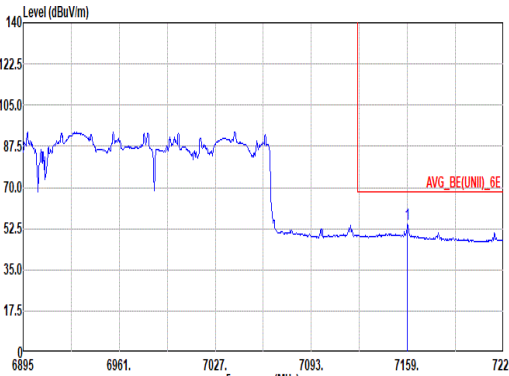
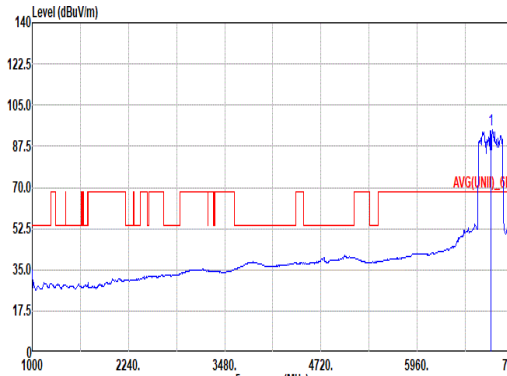


		55																																																																																														
Mode	Band Edge																																																																																															
	U-NII-8_6.875-7.125_802.11be EHT320_CH191_Full RU_6905MHz																																																																																															
ANT	1+2+3+4																																																																																															
Pol.	Vertical						Fundamental																																																																																									
Peak																																																																																																
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7160.32</td><td>60.57</td><td>88.20</td><td>-27.63</td><td>46.88</td><td>36.74</td><td>15.29</td><td>38.34</td><td>0.00</td><td>100</td><td>257 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7160.32	60.57	88.20	-27.63	46.88	36.74	15.29	38.34	0.00	100	257 PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6905.00</td><td>102.68</td><td>-----</td><td>-----</td><td>89.99</td><td>35.00</td><td>15.06</td><td>38.17</td><td>0.00</td><td>100</td><td>257 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6905.00	102.68	-----	-----	89.99	35.00	15.06	38.17	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	7160.32	60.57	88.20	-27.63	46.88	36.74	15.29	38.34	0.00	100	257 PEAK																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	6905.00	102.68	-----	-----	89.99	35.00	15.06	38.17	0.00	100	257 PEAK																																																																																					
Avg.																																																																																																
	Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7159.00</td><td>54.64</td><td>68.20</td><td>-13.56</td><td>40.95</td><td>36.74</td><td>15.29</td><td>38.34</td><td>0.00</td><td>100</td><td>257 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7159.00	54.64	68.20	-13.56	40.95	36.74	15.29	38.34	0.00	100	257 AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6905.00</td><td>94.61</td><td>-----</td><td>-----</td><td>81.93</td><td>35.00</td><td>15.06</td><td>38.18</td><td>0.00</td><td>100</td><td>257 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6905.00	94.61	-----	-----	81.93	35.00	15.06	38.18	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	7159.00	54.64	68.20	-13.56	40.95	36.74	15.29	38.34	0.00	100	257 AVERAGE																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	6905.00	94.61	-----	-----	81.93	35.00	15.06	38.18	0.00	100	257 AVERAGE																																																																																					

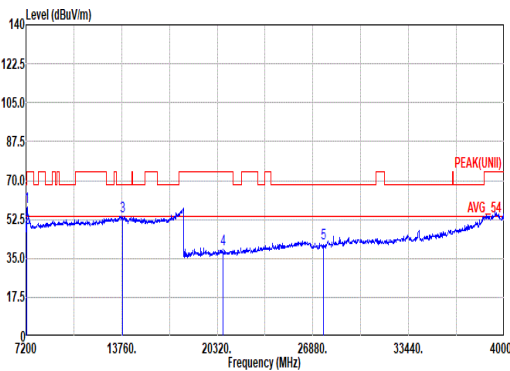
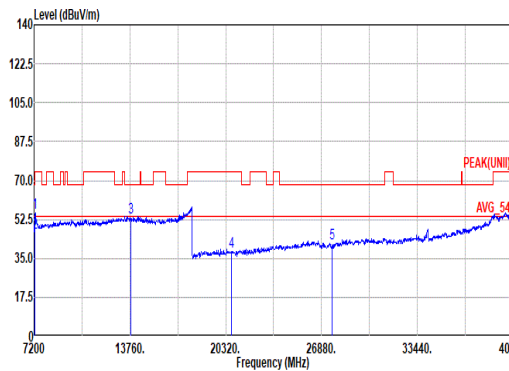


Mode	55																																																																																																																																																											
	Harmonic																																																																																																																																																											
	U-NII-8_6.875-7.125_802.11be EHT320_CH191_Full RU_6905MHz																																																																																																																																																											
ANT	1+2+3+4																																																																																																																																																											
Pol.	Horizontal	Vertical																																																																																																																																																										
Peak Avg.	 Site : 03CH20-HY Condition: PEAK(UNII) 1m BBH9170_1230_241025 HORIZONTAL Mode : 55 <table><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7267.20</td><td>58.07</td><td>74.00</td><td>-15.93</td><td>43.25</td><td>36.90</td><td>15.40</td><td>38.43</td><td>0.95</td><td>292 0 Peak</td></tr><tr><td>2</td><td>7267.20</td><td>48.65</td><td>54.00</td><td>-5.35</td><td>33.83</td><td>36.90</td><td>15.40</td><td>38.43</td><td>0.95</td><td>292 0 Average</td></tr><tr><td>3</td><td>13810.00</td><td>53.96</td><td>88.20</td><td>-34.24</td><td>35.99</td><td>38.98</td><td>21.41</td><td>43.48</td><td>1.06</td><td>-- -- PEAK</td></tr><tr><td>4</td><td>20715.00</td><td>39.09</td><td>74.00</td><td>-34.91</td><td>38.97</td><td>38.10</td><td>26.47</td><td>54.91</td><td>-9.54</td><td>-- -- PEAK</td></tr><tr><td>5</td><td>27620.00</td><td>41.72</td><td>68.20</td><td>-26.48</td><td>34.59</td><td>39.34</td><td>30.93</td><td>53.60</td><td>-9.54</td><td>-- -- PEAK</td></tr></table>		Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	Level	Line Margin	Level	Factor	Loss	Factor	dB	cm	deg	1	7267.20	58.07	74.00	-15.93	43.25	36.90	15.40	38.43	0.95	292 0 Peak	2	7267.20	48.65	54.00	-5.35	33.83	36.90	15.40	38.43	0.95	292 0 Average	3	13810.00	53.96	88.20	-34.24	35.99	38.98	21.41	43.48	1.06	-- -- PEAK	4	20715.00	39.09	74.00	-34.91	38.97	38.10	26.47	54.91	-9.54	-- -- PEAK	5	27620.00	41.72	68.20	-26.48	34.59	39.34	30.93	53.60	-9.54	-- -- PEAK	 Site : 03CH20-HY Condition: PEAK(UNII) 1m BBH9170_1230_241025 VERTICAL Mode : 55 <table><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7270.00</td><td>55.73</td><td>74.00</td><td>-18.27</td><td>40.92</td><td>36.90</td><td>15.40</td><td>38.44</td><td>0.95</td><td>200 94 Peak</td></tr><tr><td>2</td><td>7270.00</td><td>46.56</td><td>54.00</td><td>-7.44</td><td>31.75</td><td>36.90</td><td>15.40</td><td>38.44</td><td>0.95</td><td>200 94 Average</td></tr><tr><td>3</td><td>13810.00</td><td>53.46</td><td>88.20</td><td>-34.74</td><td>35.49</td><td>38.98</td><td>21.41</td><td>43.48</td><td>1.06</td><td>-- -- PEAK</td></tr><tr><td>4</td><td>20715.00</td><td>38.26</td><td>74.00</td><td>-35.74</td><td>38.14</td><td>38.10</td><td>26.47</td><td>54.91</td><td>-9.54</td><td>-- -- PEAK</td></tr><tr><td>5</td><td>27620.00</td><td>41.60</td><td>68.20</td><td>-26.60</td><td>34.47</td><td>39.34</td><td>30.93</td><td>53.60</td><td>-9.54</td><td>-- -- PEAK</td></tr></table>		Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	Level	Line Margin	Level	Factor	Loss	Factor	dB	cm	deg	1	7270.00	55.73	74.00	-18.27	40.92	36.90	15.40	38.44	0.95	200 94 Peak	2	7270.00	46.56	54.00	-7.44	31.75	36.90	15.40	38.44	0.95	200 94 Average	3	13810.00	53.46	88.20	-34.74	35.49	38.98	21.41	43.48	1.06	-- -- PEAK	4	20715.00	38.26	74.00	-35.74	38.14	38.10	26.47	54.91	-9.54	-- -- PEAK	5	27620.00	41.60	68.20	-26.60	34.47	39.34	30.93	53.60	-9.54	-- -- PEAK
	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
	MHz	Level	Line Margin	Level	Factor	Loss	Factor	dB	cm	deg																																																																																																																																																		
1	7267.20	58.07	74.00	-15.93	43.25	36.90	15.40	38.43	0.95	292 0 Peak																																																																																																																																																		
2	7267.20	48.65	54.00	-5.35	33.83	36.90	15.40	38.43	0.95	292 0 Average																																																																																																																																																		
3	13810.00	53.96	88.20	-34.24	35.99	38.98	21.41	43.48	1.06	-- -- PEAK																																																																																																																																																		
4	20715.00	39.09	74.00	-34.91	38.97	38.10	26.47	54.91	-9.54	-- -- PEAK																																																																																																																																																		
5	27620.00	41.72	68.20	-26.48	34.59	39.34	30.93	53.60	-9.54	-- -- PEAK																																																																																																																																																		
	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
	MHz	Level	Line Margin	Level	Factor	Loss	Factor	dB	cm	deg																																																																																																																																																		
1	7270.00	55.73	74.00	-18.27	40.92	36.90	15.40	38.44	0.95	200 94 Peak																																																																																																																																																		
2	7270.00	46.56	54.00	-7.44	31.75	36.90	15.40	38.44	0.95	200 94 Average																																																																																																																																																		
3	13810.00	53.46	88.20	-34.74	35.49	38.98	21.41	43.48	1.06	-- -- PEAK																																																																																																																																																		
4	20715.00	38.26	74.00	-35.74	38.14	38.10	26.47	54.91	-9.54	-- -- PEAK																																																																																																																																																		
5	27620.00	41.60	68.20	-26.60	34.47	39.34	30.93	53.60	-9.54	-- -- PEAK																																																																																																																																																		

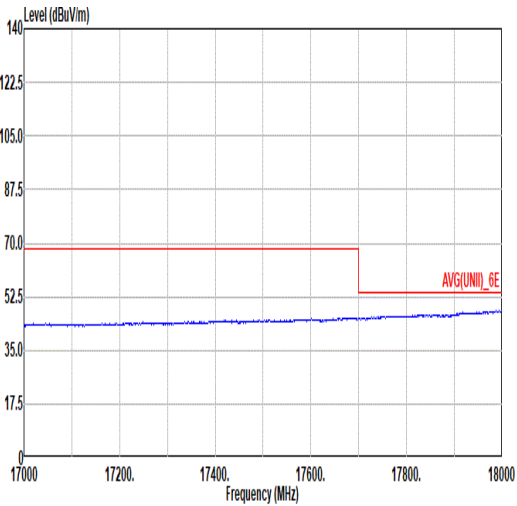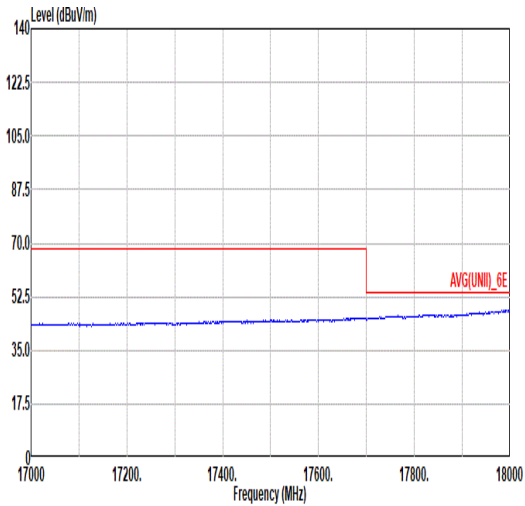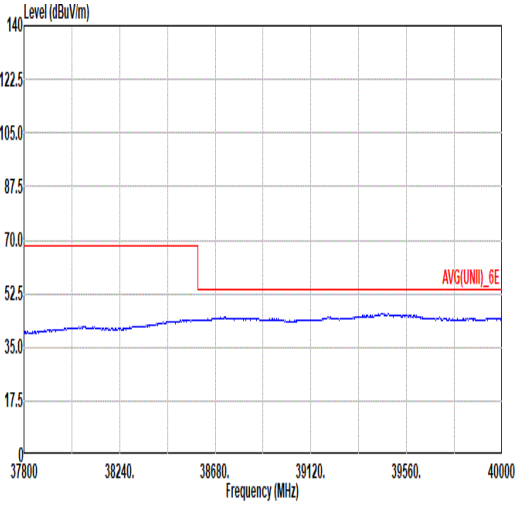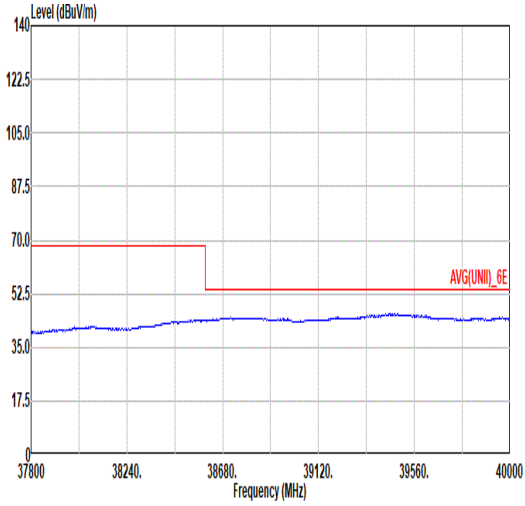





Mode	55	
	Harmonic	
	U-NII-8_6.875-7.125_802.11be EHT320_CH191_Full RU_6905MHz	
ANT	1+2+3+4	
Pol.	Horizontal	Vertical
17G ~18G Avg.	 Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91280_02360_241101 HORIZONTAL Mode : 55	 Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91280_02360_241101 VERTICAL Mode : 55
	 Site : 03CH20-HY Condition: AVG(UNII)_6E 1m 88H9170_1230_241025 HORIZONTAL Mode : 55	 Site : 03CH20-HY Condition: AVG(UNII)_6E 1m 88H9170_1230_241025 VERTICAL Mode : 55

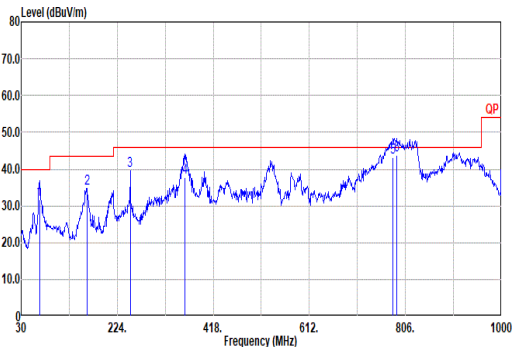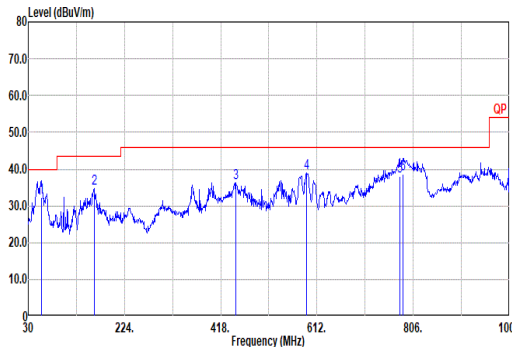





Mode	69																																																																																																																																																																																																																																	
	LF																																																																																																																																																																																																																																	
	U-NII-8_6.875-7.125_802.11be EHT20_CH233_Full RU_7115MHz																																																																																																																																																																																																																																	
ANT	1+2+3+4																																																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																
QPI/ Peak	 Site : 03CH20-HY Condition: QP 3m Bilog_55606 & 00_241127 HORIZONTAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>66.86</td><td>31.70</td><td>40.00</td><td>-8.30</td><td>53.62</td><td>12.07</td><td>1.54</td><td>35.72</td><td>0.19</td><td>219</td><td>281</td><td>QP</td><td></td></tr><tr><td>2</td><td>162.89</td><td>34.79</td><td>43.50</td><td>-8.71</td><td>51.61</td><td>16.20</td><td>2.38</td><td>35.58</td><td>0.18</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>3</td><td>258.19</td><td>39.45</td><td>46.00</td><td>-6.55</td><td>53.17</td><td>18.59</td><td>2.90</td><td>35.40</td><td>0.19</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>4</td><td>368.77</td><td>37.70</td><td>46.00</td><td>-8.30</td><td>48.38</td><td>20.77</td><td>3.48</td><td>35.09</td><td>0.16</td><td>113</td><td>251</td><td>QP</td><td></td></tr><tr><td>5</td><td>788.78</td><td>43.17</td><td>46.00</td><td>-2.83</td><td>43.58</td><td>28.20</td><td>5.01</td><td>33.77</td><td>0.15</td><td>100</td><td>91</td><td>QP</td><td></td></tr><tr><td>6</td><td>788.54</td><td>43.75</td><td>46.00</td><td>-2.25</td><td>44.05</td><td>28.25</td><td>5.03</td><td>33.74</td><td>0.16</td><td>100</td><td>203</td><td>QP</td><td></td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1	66.86	31.70	40.00	-8.30	53.62	12.07	1.54	35.72	0.19	219	281	QP		2	162.89	34.79	43.50	-8.71	51.61	16.20	2.38	35.58	0.18	--	--	Peak		3	258.19	39.45	46.00	-6.55	53.17	18.59	2.90	35.40	0.19	--	--	Peak		4	368.77	37.70	46.00	-8.30	48.38	20.77	3.48	35.09	0.16	113	251	QP		5	788.78	43.17	46.00	-2.83	43.58	28.20	5.01	33.77	0.15	100	91	QP		6	788.54	43.75	46.00	-2.25	44.05	28.25	5.03	33.74	0.16	100	203	QP		 Site : 03CH20-HY Condition: QP 3m Bilog_55606 & 00_241127 VERTICAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>56.19</td><td>32.25</td><td>40.00</td><td>-7.75</td><td>53.84</td><td>12.50</td><td>1.42</td><td>35.73</td><td>0.22</td><td>100</td><td>186</td><td>QP</td><td></td></tr><tr><td>2</td><td>162.89</td><td>34.63</td><td>43.50</td><td>-8.87</td><td>51.45</td><td>16.20</td><td>2.38</td><td>35.58</td><td>0.18</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>3</td><td>449.84</td><td>36.28</td><td>46.00</td><td>-9.72</td><td>44.14</td><td>23.04</td><td>3.86</td><td>34.90</td><td>0.14</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>4</td><td>591.63</td><td>39.01</td><td>46.00</td><td>-6.99</td><td>43.08</td><td>25.92</td><td>4.40</td><td>34.49</td><td>0.10</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>5</td><td>778.84</td><td>38.13</td><td>46.00</td><td>-7.87</td><td>38.53</td><td>28.22</td><td>5.00</td><td>33.77</td><td>0.15</td><td>100</td><td>7</td><td>QP</td><td></td></tr><tr><td>6</td><td>784.66</td><td>38.58</td><td>46.00</td><td>-7.42</td><td>38.93</td><td>28.23</td><td>5.02</td><td>33.75</td><td>0.15</td><td>114</td><td>351</td><td>QP</td><td></td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1	56.19	32.25	40.00	-7.75	53.84	12.50	1.42	35.73	0.22	100	186	QP		2	162.89	34.63	43.50	-8.87	51.45	16.20	2.38	35.58	0.18	--	--	Peak		3	449.84	36.28	46.00	-9.72	44.14	23.04	3.86	34.90	0.14	--	--	Peak		4	591.63	39.01	46.00	-6.99	43.08	25.92	4.40	34.49	0.10	--	--	Peak		5	778.84	38.13	46.00	-7.87	38.53	28.22	5.00	33.77	0.15	100	7	QP		6	784.66	38.58	46.00	-7.42	38.93	28.23	5.02	33.75	0.15	114	351	QP	
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																				
		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																					
1	66.86	31.70	40.00	-8.30	53.62	12.07	1.54	35.72	0.19	219	281	QP																																																																																																																																																																																																																						
2	162.89	34.79	43.50	-8.71	51.61	16.20	2.38	35.58	0.18	--	--	Peak																																																																																																																																																																																																																						
3	258.19	39.45	46.00	-6.55	53.17	18.59	2.90	35.40	0.19	--	--	Peak																																																																																																																																																																																																																						
4	368.77	37.70	46.00	-8.30	48.38	20.77	3.48	35.09	0.16	113	251	QP																																																																																																																																																																																																																						
5	788.78	43.17	46.00	-2.83	43.58	28.20	5.01	33.77	0.15	100	91	QP																																																																																																																																																																																																																						
6	788.54	43.75	46.00	-2.25	44.05	28.25	5.03	33.74	0.16	100	203	QP																																																																																																																																																																																																																						
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																						
1	56.19	32.25	40.00	-7.75	53.84	12.50	1.42	35.73	0.22	100	186	QP																																																																																																																																																																																																																						
2	162.89	34.63	43.50	-8.87	51.45	16.20	2.38	35.58	0.18	--	--	Peak																																																																																																																																																																																																																						
3	449.84	36.28	46.00	-9.72	44.14	23.04	3.86	34.90	0.14	--	--	Peak																																																																																																																																																																																																																						
4	591.63	39.01	46.00	-6.99	43.08	25.92	4.40	34.49	0.10	--	--	Peak																																																																																																																																																																																																																						
5	778.84	38.13	46.00	-7.87	38.53	28.22	5.00	33.77	0.15	100	7	QP																																																																																																																																																																																																																						
6	784.66	38.58	46.00	-7.42	38.93	28.23	5.02	33.75	0.15	114	351	QP																																																																																																																																																																																																																						







<Nss=2>

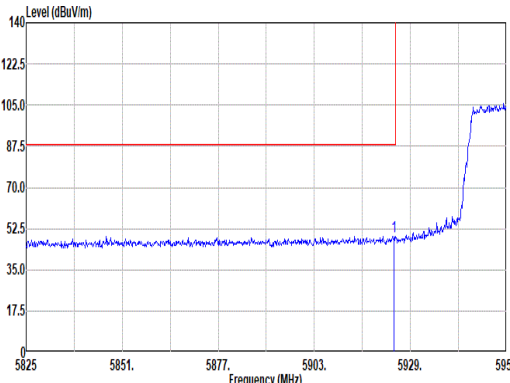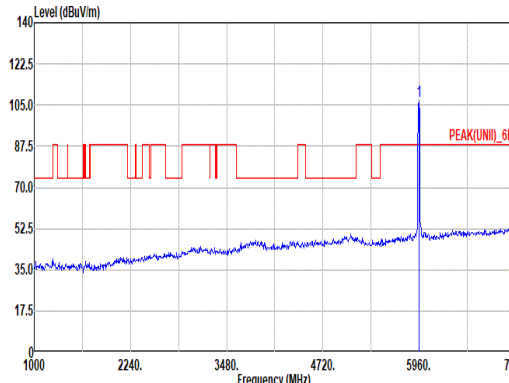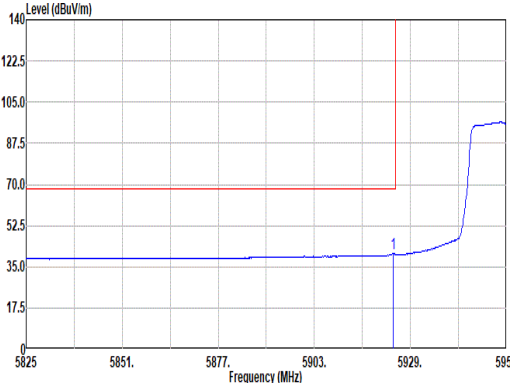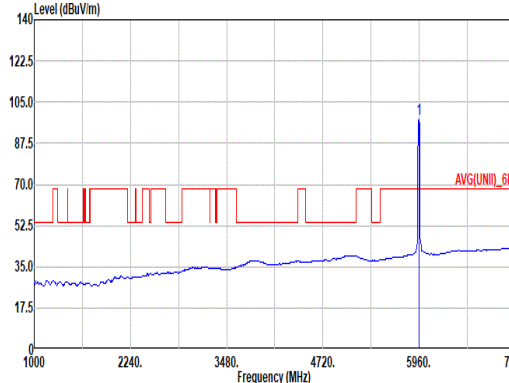		56																																																																																																						
Mode		Band Edge																																																																																																						
		U-NII-5_5.925-6.425_802.11be EHT20_CH1_Full RU_5955MHz																																																																																																						
ANT		1+2+3+4																																																																																																						
Pol.		Horizontal					Fundamental																																																																																																	
Peak																																																																																																								
		Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5924.58</td><td>49.22</td><td>88.20 -38.98</td><td>38.89</td><td>34.30</td><td>13.96</td><td>37.93</td><td>0.00</td><td>200</td><td>186</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5924.58	49.22	88.20 -38.98	38.89	34.30	13.96	37.93	0.00	200	186	PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5955.00</td><td>106.52</td><td>-----</td><td>96.16</td><td>34.28</td><td>14.01</td><td>37.93</td><td>0.00</td><td>200</td><td>186</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5955.00	106.52	-----	96.16	34.28	14.01	37.93	0.00	200	186
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1 5924.58	49.22	88.20 -38.98	38.89	34.30	13.96	37.93	0.00	200	186	PEAK																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1 5955.00	106.52	-----	96.16	34.28	14.01	37.93	0.00	200	186	PEAK																																																																																														
Avg.																																																																																																								
		Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.240kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5924.32</td><td>40.65</td><td>68.20 -27.55</td><td>30.32</td><td>34.30</td><td>13.96</td><td>37.93</td><td>0.00</td><td>200</td><td>186</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5924.32	40.65	68.20 -27.55	30.32	34.30	13.96	37.93	0.00	200	186	AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.240kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5955.00</td><td>97.96</td><td>-----</td><td>87.60</td><td>34.28</td><td>14.01</td><td>37.93</td><td>0.00</td><td>200</td><td>186</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5955.00	97.96	-----	87.60	34.28	14.01	37.93	0.00	200	186
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1 5924.32	40.65	68.20 -27.55	30.32	34.30	13.96	37.93	0.00	200	186	AVERAGE																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1 5955.00	97.96	-----	87.60	34.28	14.01	37.93	0.00	200	186	AVERAGE																																																																																														

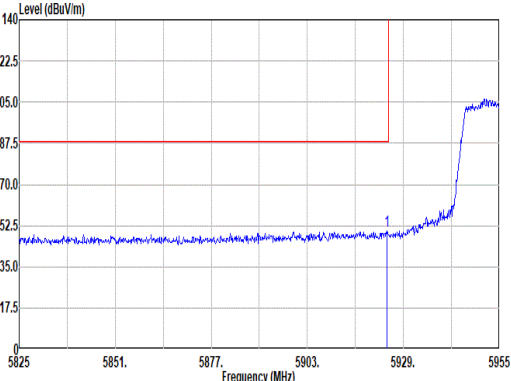
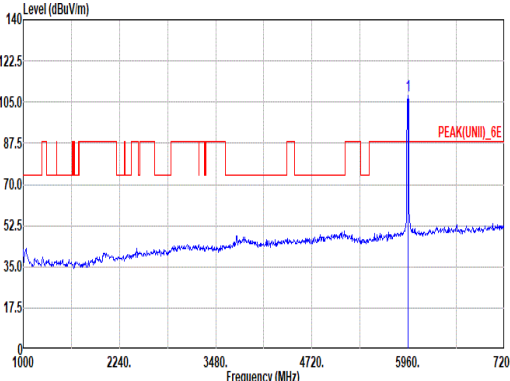
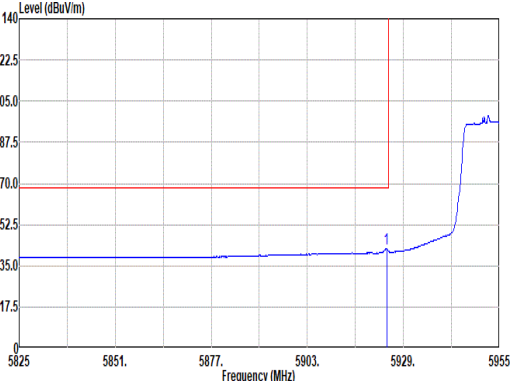
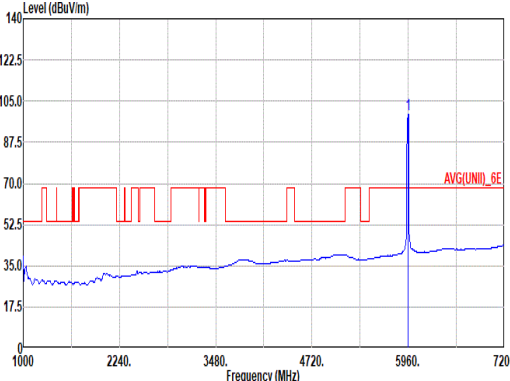


	56																																																																																															
Mode	Band Edge																																																																																															
	U-NII-5_5.925-6.425_802.11be EHT20_CH1_Full RU_5955MHz																																																																																															
ANT	1+2+3+4																																																																																															
Pol.	Vertical						Fundamental																																																																																									
Peak																																																																																																
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.58</td><td>50.36</td><td>88.20</td><td>-37.84</td><td>40.03</td><td>34.30</td><td>13.96</td><td>37.93</td><td>0.00</td><td>100</td><td>69 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.58	50.36	88.20	-37.84	40.03	34.30	13.96	37.93	0.00	100	69 PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>107.57</td><td>-----</td><td>-----</td><td>97.21</td><td>34.28</td><td>14.01</td><td>37.93</td><td>0.00</td><td>100</td><td>69 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	107.57	-----	-----	97.21	34.28	14.01	37.93	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5924.58	50.36	88.20	-37.84	40.03	34.30	13.96	37.93	0.00	100	69 PEAK																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5955.00	107.57	-----	-----	97.21	34.28	14.01	37.93	0.00	100	69 PEAK																																																																																					
Avg.																																																																																																
	Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.240kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.45</td><td>42.19</td><td>68.20</td><td>-26.01</td><td>31.86</td><td>34.30</td><td>13.96</td><td>37.93</td><td>0.00</td><td>100</td><td>69 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.45	42.19	68.20	-26.01	31.86	34.30	13.96	37.93	0.00	100	69 AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.240kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>99.45</td><td>-----</td><td>-----</td><td>89.10</td><td>34.26</td><td>14.02</td><td>37.93</td><td>0.00</td><td>100</td><td>69 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	99.45	-----	-----	89.10	34.26	14.02	37.93	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5924.45	42.19	68.20	-26.01	31.86	34.30	13.96	37.93	0.00	100	69 AVERAGE																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5955.00	99.45	-----	-----	89.10	34.26	14.02	37.93	0.00	100	69 AVERAGE																																																																																					

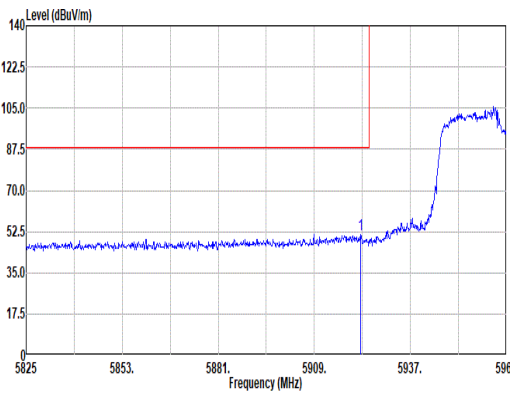
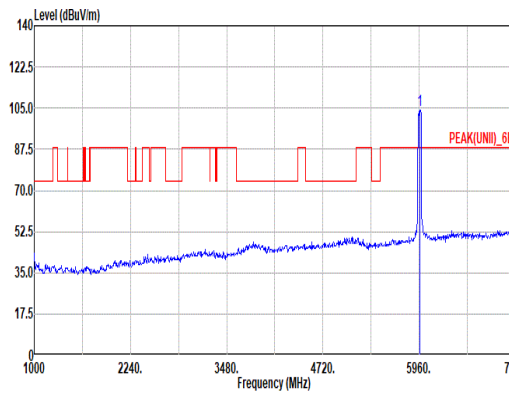
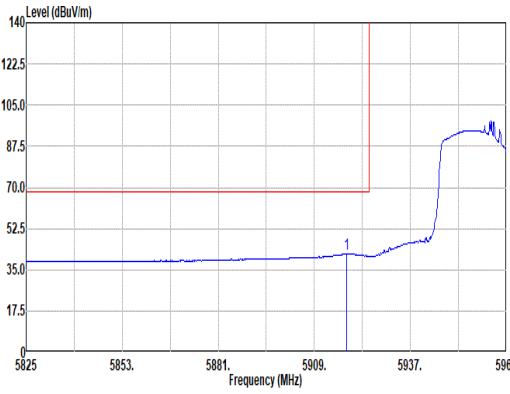
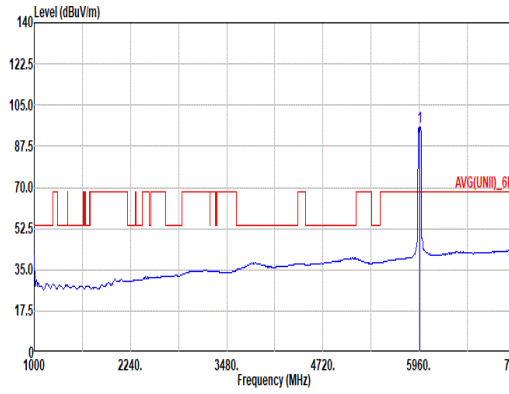


		57																																																																																																	
Mode	Band Edge																																																																																																		
	U-NII-5_5.925-6.425_802.11be EHT40_CH3_Full RU_5965MHz																																																																																																		
ANT	1+2+3+4																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5922.58</td><td>51.31</td><td>88.20</td><td>-36.89</td><td>40.98</td><td>34.30</td><td>13.96</td><td>37.93</td><td>0.00</td><td>100</td><td>103</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5922.58	51.31	88.20	-36.89	40.98	34.30	13.96	37.93	0.00	100	103	PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5965.00</td><td>104.32</td><td>-----</td><td>-----</td><td>94.00</td><td>34.21</td><td>14.04</td><td>37.93</td><td>0.00</td><td>100</td><td>103</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5965.00	104.32	-----	-----	94.00	34.21	14.04	37.93	0.00	100	103
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5922.58	51.31	88.20	-36.89	40.98	34.30	13.96	37.93	0.00	100	103	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5965.00	104.32	-----	-----	94.00	34.21	14.04	37.93	0.00	100	103	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.240kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5918.38</td><td>41.66</td><td>68.20</td><td>-26.54</td><td>31.34</td><td>34.30</td><td>13.95</td><td>37.93</td><td>0.00</td><td>100</td><td>103</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5918.38	41.66	68.20	-26.54	31.34	34.30	13.95	37.93	0.00	100	103	AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.240kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5965.00</td><td>95.82</td><td>-----</td><td>-----</td><td>85.46</td><td>34.28</td><td>14.01</td><td>37.93</td><td>0.00</td><td>100</td><td>103</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5965.00	95.82	-----	-----	85.46	34.28	14.01	37.93	0.00	100	103
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5918.38	41.66	68.20	-26.54	31.34	34.30	13.95	37.93	0.00	100	103	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5965.00	95.82	-----	-----	85.46	34.28	14.01	37.93	0.00	100	103	AVERAGE																																																																																							

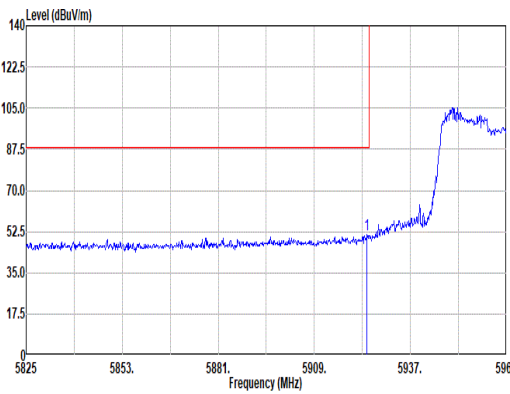
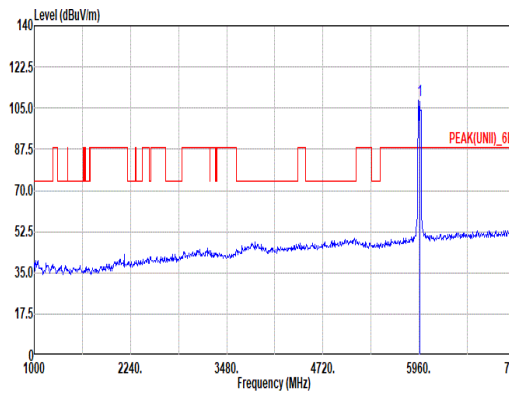
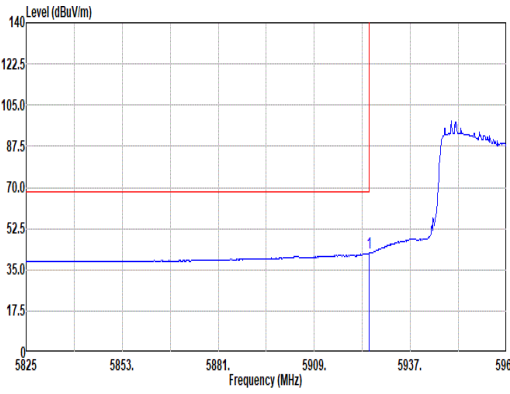
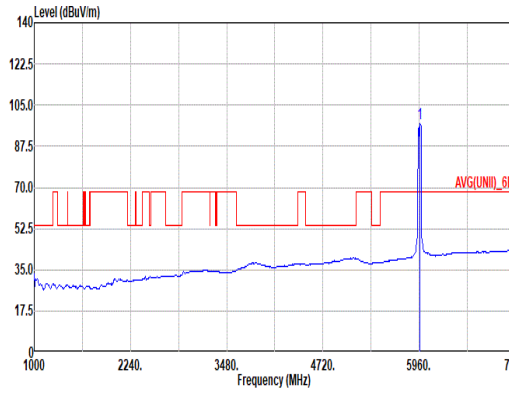


		57																																																																																																	
Mode	Band Edge																																																																																																		
	U-NII-5_5.925-6.425_802.11be EHT40_CH3_Full RU_5965MHz																																																																																																		
ANT	1+2+3+4																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5924.40</td><td>51.41</td><td>88.20</td><td>-36.79</td><td>41.08</td><td>34.30</td><td>13.96</td><td>37.93</td><td>0.00</td><td>300</td><td>161</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.40	51.41	88.20	-36.79	41.08	34.30	13.96	37.93	0.00	300	161	PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5965.00</td><td>108.19</td><td>-----</td><td>-----</td><td>97.82</td><td>34.30</td><td>14.00</td><td>37.93</td><td>0.00</td><td>300</td><td>161</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5965.00	108.19	-----	-----	97.82	34.30	14.00	37.93	0.00	300	161
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5924.40	51.41	88.20	-36.79	41.08	34.30	13.96	37.93	0.00	300	161	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5965.00	108.19	-----	-----	97.82	34.30	14.00	37.93	0.00	300	161	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.240kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5924.96</td><td>42.01</td><td>68.20</td><td>-26.19</td><td>31.68</td><td>34.30</td><td>13.96</td><td>37.93</td><td>0.00</td><td>300</td><td>161</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.96	42.01	68.20	-26.19	31.68	34.30	13.96	37.93	0.00	300	161	AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.240kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5965.00</td><td>97.03</td><td>-----</td><td>-----</td><td>86.71</td><td>34.21</td><td>14.04</td><td>37.93</td><td>0.00</td><td>300</td><td>161</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5965.00	97.03	-----	-----	86.71	34.21	14.04	37.93	0.00	300	161
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5924.96	42.01	68.20	-26.19	31.68	34.30	13.96	37.93	0.00	300	161	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5965.00	97.03	-----	-----	86.71	34.21	14.04	37.93	0.00	300	161	AVERAGE																																																																																							

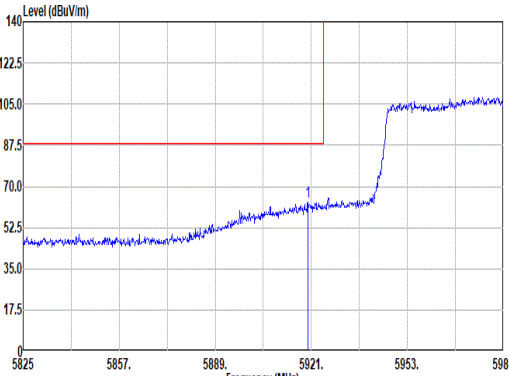
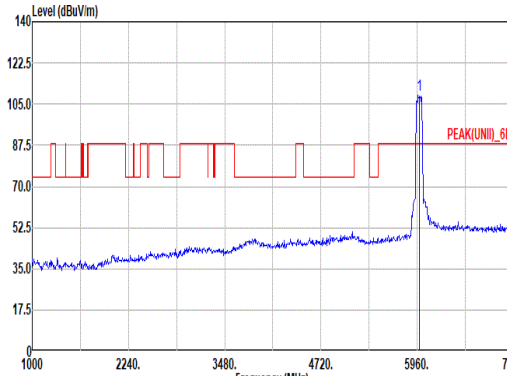
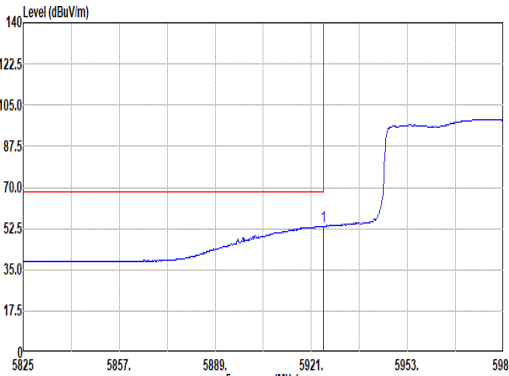
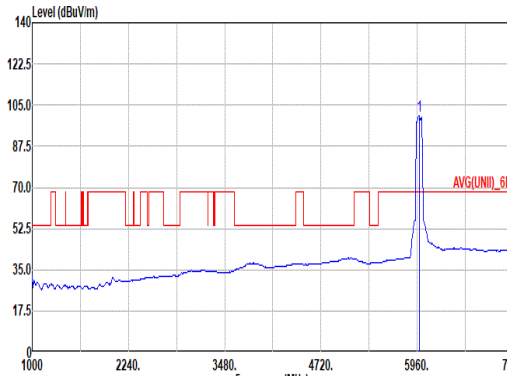


		58																																																																																																	
Mode	Band Edge																																																																																																		
	U-NII-5_5.925-6.425_802.11be EHT80_CH7_Full RU_5985MHz																																																																																																		
ANT	1+2+3+4																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5919.88</td><td>63.20</td><td>88.20</td><td>-25.00</td><td>52.88</td><td>34.30</td><td>13.95</td><td>37.93</td><td>0.00</td><td>100</td><td>124</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5919.88	63.20	88.20	-25.00	52.88	34.30	13.95	37.93	0.00	100	124	PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5985.00</td><td>108.77</td><td>-----</td><td>-----</td><td>98.45</td><td>34.21</td><td>14.04</td><td>37.93</td><td>0.00</td><td>100</td><td>124</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5985.00	108.77	-----	-----	98.45	34.21	14.04	37.93	0.00	100	124
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5919.88	63.20	88.20	-25.00	52.88	34.30	13.95	37.93	0.00	100	124	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5985.00	108.77	-----	-----	98.45	34.21	14.04	37.93	0.00	100	124	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.200kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>53.60</td><td>68.20</td><td>-14.60</td><td>43.27</td><td>34.30</td><td>13.96</td><td>37.93</td><td>0.00</td><td>100</td><td>124</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5925.00	53.60	68.20	-14.60	43.27	34.30	13.96	37.93	0.00	100	124	AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.200kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5985.00</td><td>100.40</td><td>-----</td><td>-----</td><td>90.11</td><td>34.16</td><td>14.06</td><td>37.93</td><td>0.00</td><td>100</td><td>124</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5985.00	100.40	-----	-----	90.11	34.16	14.06	37.93	0.00	100	124
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5925.00	53.60	68.20	-14.60	43.27	34.30	13.96	37.93	0.00	100	124	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5985.00	100.40	-----	-----	90.11	34.16	14.06	37.93	0.00	100	124	AVERAGE																																																																																							

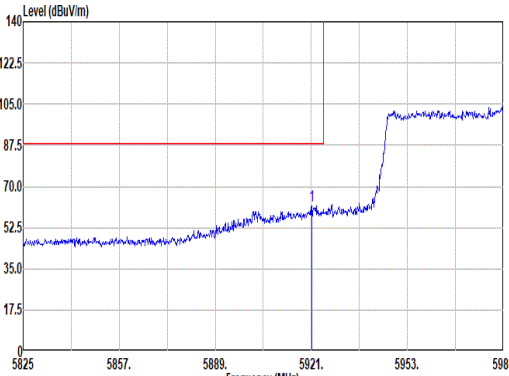
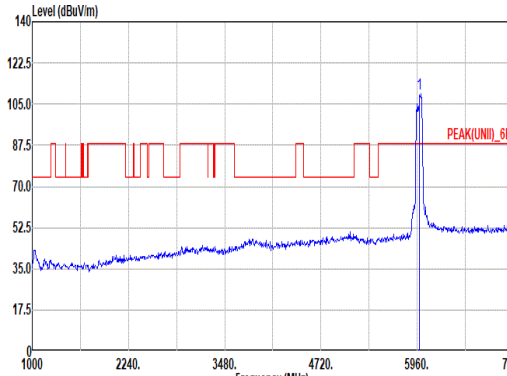
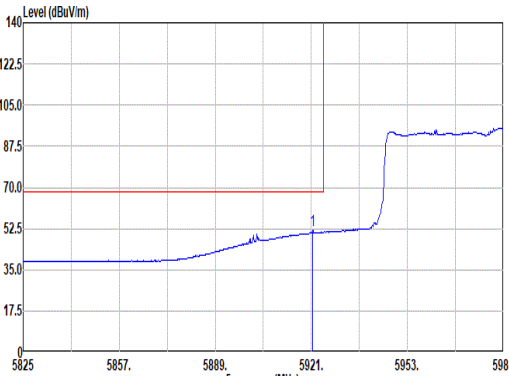
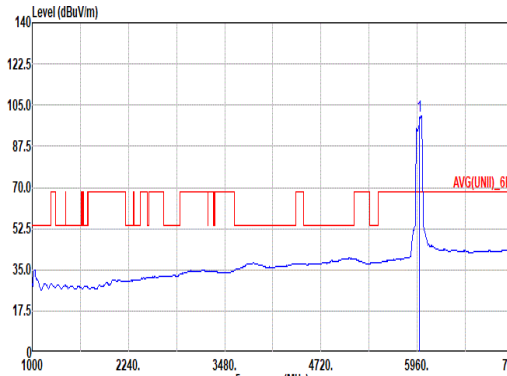


		58																																																																																																	
Mode	Band Edge																																																																																																		
	U-NII-5_5.925-6.425_802.11be EHT80_CH7_Full RU_5985MHz																																																																																																		
ANT	1+2+3+4																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5921.16</td><td>61.66</td><td>88.20</td><td>-26.54</td><td>51.34</td><td>34.30</td><td>13.95</td><td>37.93</td><td>0.00</td><td>394</td><td>101</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5921.16	61.66	88.20	-26.54	51.34	34.30	13.95	37.93	0.00	394	101	PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5985.00</td><td>109.30</td><td>-----</td><td>-----</td><td>99.04</td><td>34.10</td><td>14.09</td><td>37.93</td><td>0.00</td><td>394</td><td>101</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5985.00	109.30	-----	-----	99.04	34.10	14.09	37.93	0.00	394	101
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5921.16	61.66	88.20	-26.54	51.34	34.30	13.95	37.93	0.00	394	101	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5985.00	109.30	-----	-----	99.04	34.10	14.09	37.93	0.00	394	101	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.200kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5921.48</td><td>51.91</td><td>68.20</td><td>-16.29</td><td>41.59</td><td>34.30</td><td>13.95</td><td>37.93</td><td>0.00</td><td>394</td><td>101</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5921.48	51.91	68.20	-16.29	41.59	34.30	13.95	37.93	0.00	394	101	AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.200kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5985.00</td><td>100.54</td><td>-----</td><td>-----</td><td>90.28</td><td>34.10</td><td>14.09</td><td>37.93</td><td>0.00</td><td>394</td><td>101</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5985.00	100.54	-----	-----	90.28	34.10	14.09	37.93	0.00	394	101
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5921.48	51.91	68.20	-16.29	41.59	34.30	13.95	37.93	0.00	394	101	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5985.00	100.54	-----	-----	90.28	34.10	14.09	37.93	0.00	394	101	AVERAGE																																																																																							

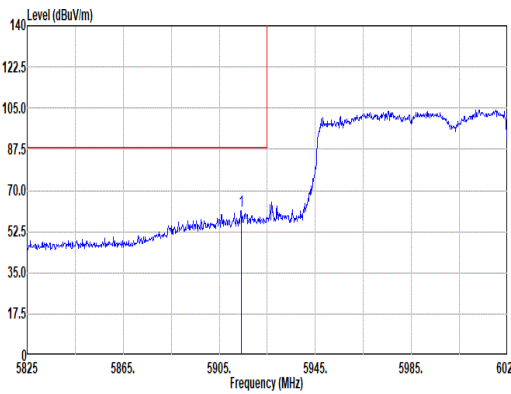
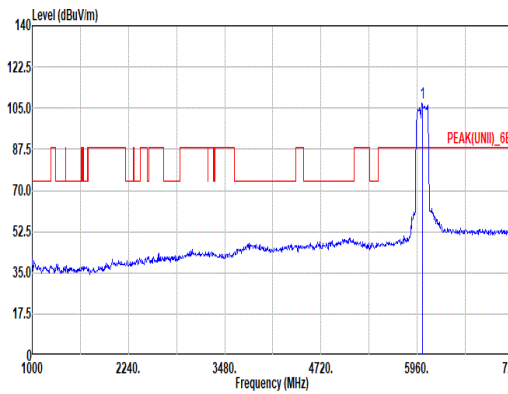
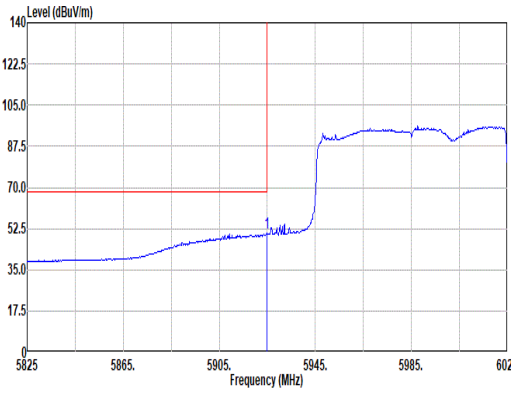
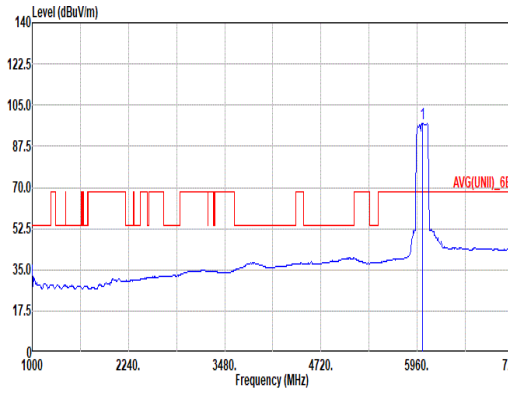


		59																																																																																																										
Mode	Band Edge																																																																																																											
	U-NII-5_5.925-6.425_802.11be EHT160_CH15_Full RU_6025MHz																																																																																																											
ANT	1+2+3+4																																																																																																											
Pol.	Horizontal						Fundamental																																																																																																					
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5914.20</td><td>61.53</td><td>88.20</td><td>-26.67</td><td>51.22</td><td>34.30</td><td>13.94</td><td>37.93</td><td>0.00</td><td>173</td><td>62 PEAK</td></tr></tbody></table>  Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>6025.00</td><td>107.08</td><td>-----</td><td>-----</td><td>96.82</td><td>34.10</td><td>14.09</td><td>37.93</td><td>0.00</td><td>173</td><td>62 PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5914.20	61.53	88.20	-26.67	51.22	34.30	13.94	37.93	0.00	173	62 PEAK		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	6025.00	107.08	-----	-----	96.82	34.10	14.09	37.93	0.00	173	62 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5914.20	61.53	88.20	-26.67	51.22	34.30	13.94	37.93	0.00	173	62 PEAK																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	6025.00	107.08	-----	-----	96.82	34.10	14.09	37.93	0.00	173	62 PEAK																																																																																																	
Avg.	 Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.200kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>50.51</td><td>68.20</td><td>-17.69</td><td>40.18</td><td>34.30</td><td>13.96</td><td>37.93</td><td>0.00</td><td>173</td><td>62 AVERAGE</td></tr></tbody></table>  Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.200kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>6025.00</td><td>97.10</td><td>-----</td><td>-----</td><td>86.82</td><td>34.10</td><td>14.11</td><td>37.93</td><td>0.00</td><td>173</td><td>62 AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5925.00	50.51	68.20	-17.69	40.18	34.30	13.96	37.93	0.00	173	62 AVERAGE		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	6025.00	97.10	-----	-----	86.82	34.10	14.11	37.93	0.00	173	62 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5925.00	50.51	68.20	-17.69	40.18	34.30	13.96	37.93	0.00	173	62 AVERAGE																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	6025.00	97.10	-----	-----	86.82	34.10	14.11	37.93	0.00	173	62 AVERAGE																																																																																																	

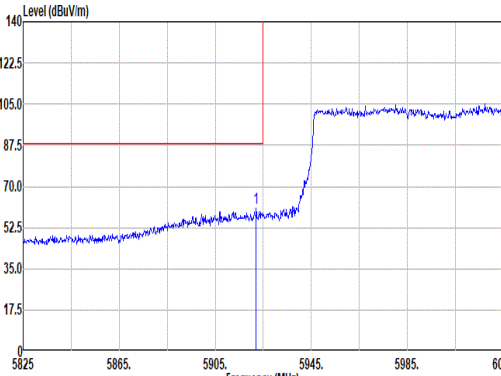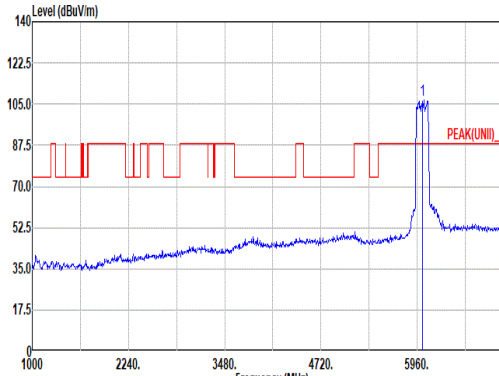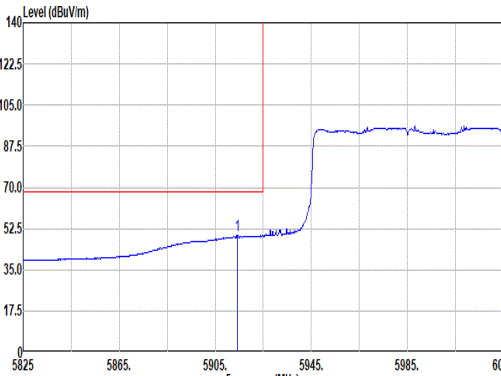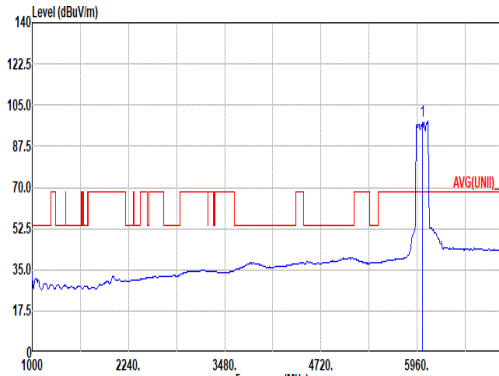

		59																																																																												
Mode	Band Edge																																																																													
	U-NII-5_5.925-6.425_802.11be EHT160_CH15_Full RU_6025MHz																																																																													
ANT	1+2+3+4																																																																													
Pol.	Vertical						Fundamental																																																																							
Peak																																																																														
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5922.00</td><td>60.98</td><td>88.20</td><td>-27.22</td><td>50.65</td><td>34.30</td><td>13.96</td><td>37.93</td><td>0.00</td><td>100</td><td>51 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5922.00	60.98	88.20	-27.22	50.65	34.30	13.96	37.93	0.00	100	51 PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6025.00</td><td>106.95</td><td>-----</td><td>-----</td><td>96.65</td><td>34.10</td><td>14.13</td><td>37.93</td><td>0.00</td><td>100</td><td>51 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	6025.00	106.95	-----	-----	96.65	34.10	14.13	37.93	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																				
1	5922.00	60.98	88.20	-27.22	50.65	34.30	13.96	37.93	0.00	100	51 PEAK																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																				
1	6025.00	106.95	-----	-----	96.65	34.10	14.13	37.93	0.00	100	51 PEAK																																																																			
Avg.																																																																														
	Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5914.20</td><td>49.69</td><td>68.20</td><td>-18.51</td><td>39.38</td><td>34.30</td><td>13.94</td><td>37.93</td><td>0.00</td><td>100</td><td>51 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5914.20	49.69	68.20	-18.51	39.38	34.30	13.94	37.93	0.00	100	51 AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6025.00</td><td>98.12</td><td>-----</td><td>-----</td><td>87.78</td><td>34.11</td><td>14.17</td><td>37.94</td><td>0.00</td><td>100</td><td>51 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	6025.00	98.12	-----	-----	87.78	34.11	14.17	37.94	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																				
1	5914.20	49.69	68.20	-18.51	39.38	34.30	13.94	37.93	0.00	100	51 AVERAGE																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																				
1	6025.00	98.12	-----	-----	87.78	34.11	14.17	37.94	0.00	100	51 AVERAGE																																																																			

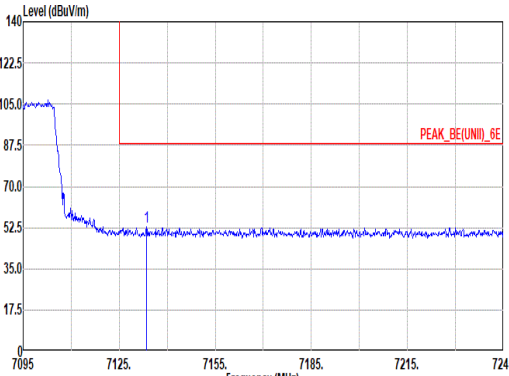
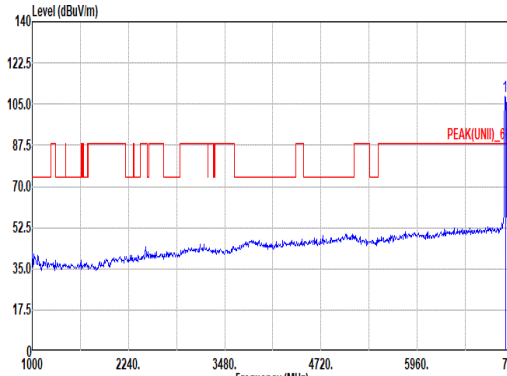
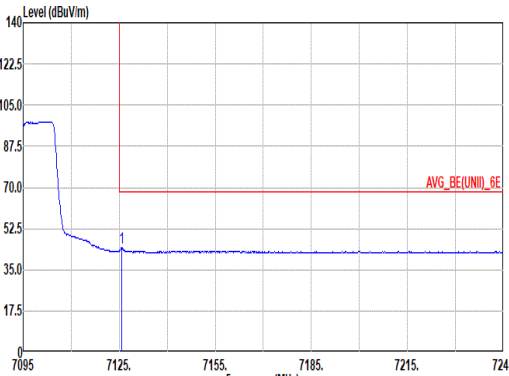
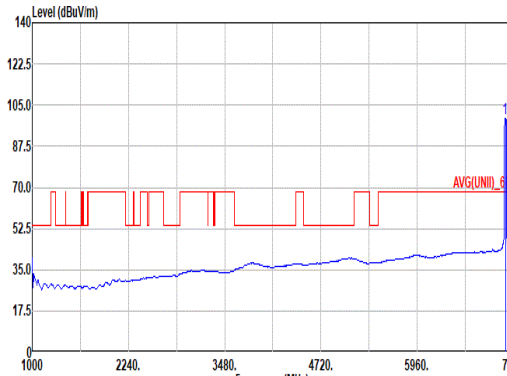


Mode	60																																																																																															
	Band Edge																																																																																															
	U-NII-5_5.925-6.425_802.11be EHT20_CH229_Full RU_7095MHz																																																																																															
ANT	1+2+3+4																																																																																															
Pol.	Horizontal						Fundamental																																																																																									
Peak																																																																																																
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>7133.55</td><td>53.03</td><td>88.20</td><td>-35.17</td><td>39.52</td><td>36.57</td><td>15.26</td><td>38.32</td><td>0.00</td><td>299</td><td>20 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7133.55	53.03	88.20	-35.17	39.52	36.57	15.26	38.32	0.00	299	20 PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>7095.00</td><td>100.32</td><td>-----</td><td>-----</td><td>95.11</td><td>36.28</td><td>15.21</td><td>38.28</td><td>0.00</td><td>299</td><td>20 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7095.00	100.32	-----	-----	95.11	36.28	15.21	38.28	0.00	299
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	7133.55	53.03	88.20	-35.17	39.52	36.57	15.26	38.32	0.00	299	20 PEAK																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	7095.00	100.32	-----	-----	95.11	36.28	15.21	38.28	0.00	299	20 PEAK																																																																																					
Avg.																																																																																																
	Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.240kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>7125.75</td><td>44.22</td><td>68.20</td><td>-23.98</td><td>30.78</td><td>36.51</td><td>15.25</td><td>38.32</td><td>0.00</td><td>299</td><td>20 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7125.75	44.22	68.20	-23.98	30.78	36.51	15.25	38.32	0.00	299	20 AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.240kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>7095.00</td><td>99.57</td><td>-----</td><td>-----</td><td>86.32</td><td>36.31</td><td>15.23</td><td>38.29</td><td>0.00</td><td>299</td><td>20 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7095.00	99.57	-----	-----	86.32	36.31	15.23	38.29	0.00	299
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	7125.75	44.22	68.20	-23.98	30.78	36.51	15.25	38.32	0.00	299	20 AVERAGE																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	7095.00	99.57	-----	-----	86.32	36.31	15.23	38.29	0.00	299	20 AVERAGE																																																																																					







Mode	60																																																																																																			
	Band Edge																																																																																																			
	U-NII-5_5.925-6.425_802.11be EHT20_CH229_Full RU_7095MHz																																																																																																			
ANT	1+2+3+4																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>7198.65</td><td>52.80</td><td>88.20</td><td>-35.40</td><td>38.96</td><td>36.89</td><td>15.33</td><td>38.38</td><td>0.00</td><td>103</td><td>88</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7198.65	52.80	88.20	-35.40	38.96	36.89	15.33	38.38	0.00	103	88	PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>7095.00</td><td>105.62</td><td>-----</td><td>-----</td><td>92.37</td><td>36.31</td><td>15.23</td><td>38.29</td><td>0.00</td><td>103</td><td>88</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7095.00	105.62	-----	-----	92.37	36.31	15.23	38.29	0.00	103	88	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	7198.65	52.80	88.20	-35.40	38.96	36.89	15.33	38.38	0.00	103	88	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	7095.00	105.62	-----	-----	92.37	36.31	15.23	38.29	0.00	103	88	PEAK																																																																																								
Avg.	Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.240kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>7125.60</td><td>43.32</td><td>68.20</td><td>-24.88</td><td>29.89</td><td>36.50</td><td>15.25</td><td>38.32</td><td>0.00</td><td>103</td><td>88</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7125.60	43.32	68.20	-24.88	29.89	36.50	15.25	38.32	0.00	103	88	AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.240kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>7095.00</td><td>97.38</td><td>-----</td><td>-----</td><td>84.16</td><td>36.29</td><td>15.22</td><td>38.29</td><td>0.00</td><td>103</td><td>88</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7095.00	97.38	-----	-----	84.16	36.29	15.22	38.29	0.00	103	88	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	7125.60	43.32	68.20	-24.88	29.89	36.50	15.25	38.32	0.00	103	88	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	7095.00	97.38	-----	-----	84.16	36.29	15.22	38.29	0.00	103	88	AVERAGE																																																																																								

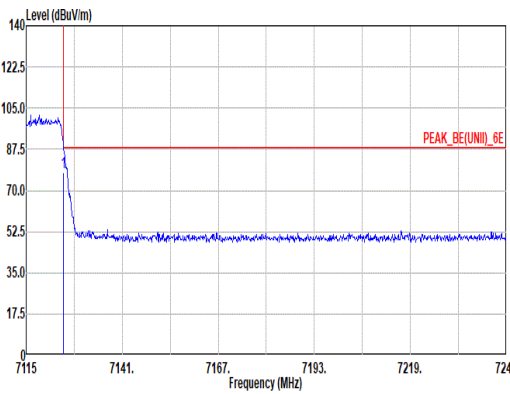
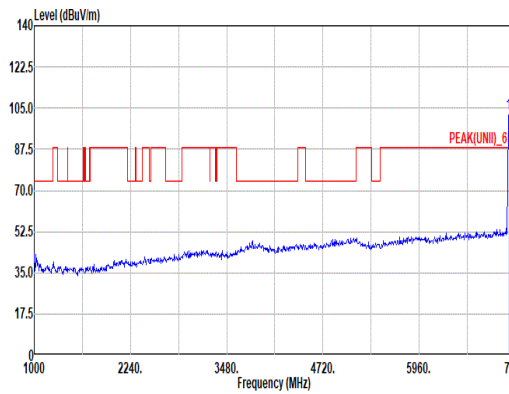
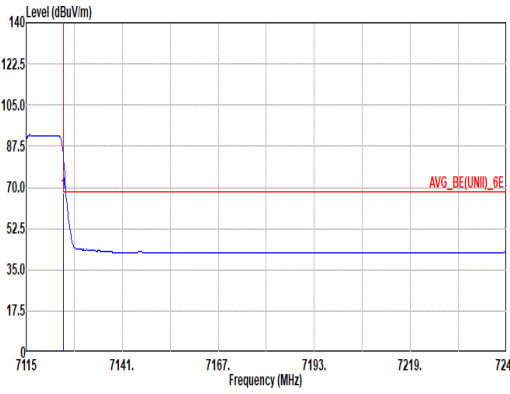
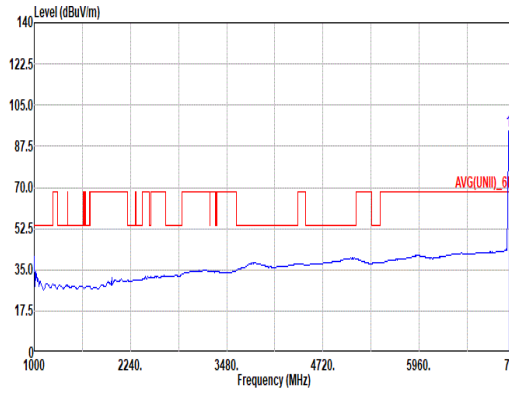


Mode	61																																																																																																
	Band Edge																																																																																																
	U-NII-5_5.925-6.425_802.11be EHT20_CH233_Full RU_7115MHz																																																																																																
ANT	1+2+3+4																																																																																																
Pol.	Horizontal						Fundamental																																																																																										
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7125.01</td><td>77.89</td><td>88.20</td><td>-10.31</td><td>64.46</td><td>36.50</td><td>15.25</td><td>38.32</td><td>0.00</td><td>290</td><td>20 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7125.01	77.89	88.20	-10.31	64.46	36.50	15.25	38.32	0.00	290	20 PEAK	 Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7115.00</td><td>102.46</td><td>-----</td><td>-----</td><td>89.06</td><td>36.46</td><td>15.25</td><td>38.31</td><td>0.00</td><td>290</td><td>20 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7115.00	102.46	-----	-----	89.06	36.46	15.25	38.31	0.00	290	20 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	7125.01	77.89	88.20	-10.31	64.46	36.50	15.25	38.32	0.00	290	20 PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	7115.00	102.46	-----	-----	89.06	36.46	15.25	38.31	0.00	290	20 PEAK																																																																																						
Avg.	 Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.240kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7125.01</td><td>67.73</td><td>68.20</td><td>-0.47</td><td>54.30</td><td>36.50</td><td>15.25</td><td>38.32</td><td>0.00</td><td>290</td><td>20 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7125.01	67.73	68.20	-0.47	54.30	36.50	15.25	38.32	0.00	290	20 AVERAGE	 Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.240kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7115.00</td><td>93.99</td><td>-----</td><td>-----</td><td>80.65</td><td>36.41</td><td>15.24</td><td>38.31</td><td>0.00</td><td>290</td><td>20 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7115.00	93.99	-----	-----	80.65	36.41	15.24	38.31	0.00	290	20 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	7125.01	67.73	68.20	-0.47	54.30	36.50	15.25	38.32	0.00	290	20 AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	7115.00	93.99	-----	-----	80.65	36.41	15.24	38.31	0.00	290	20 AVERAGE																																																																																						

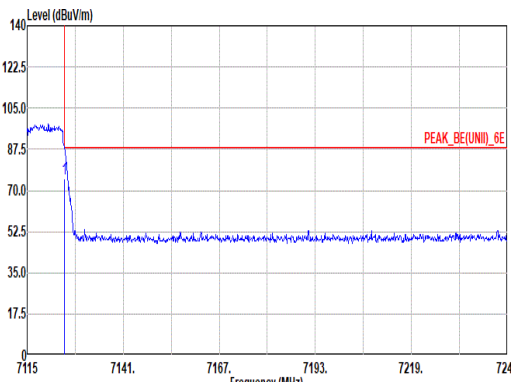
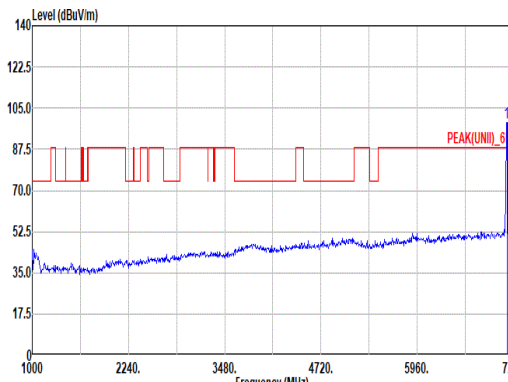
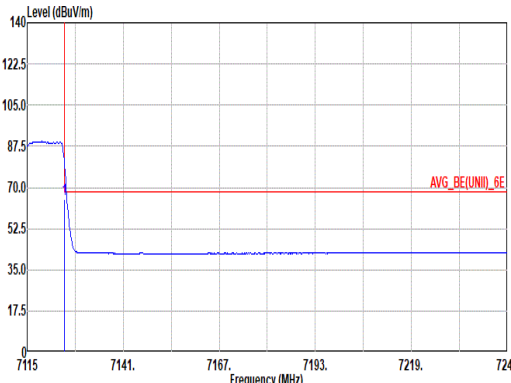
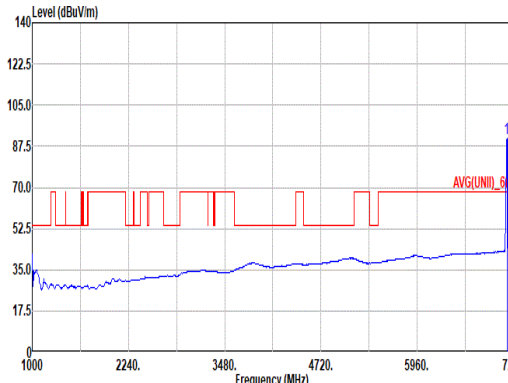


Mode	61																																																																																															
	Band Edge																																																																																															
	U-NII-5_5.925-6.425_802.11be EHT20_CH233_Full RU_7115MHz																																																																																															
ANT	1+2+3+4																																																																																															
Pol.	Vertical						Fundamental																																																																																									
Peak																																																																																																
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7125.01</td><td>75.09</td><td>88.20</td><td>-13.11</td><td>61.66</td><td>36.50</td><td>15.25</td><td>38.32</td><td>0.00</td><td>286</td><td>7 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7125.01	75.09	88.20	-13.11	61.66	36.50	15.25	38.32	0.00	286	7 PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7115.00</td><td>98.90</td><td>-----</td><td>-----</td><td>85.50</td><td>36.46</td><td>15.25</td><td>38.31</td><td>0.00</td><td>286</td><td>7 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7115.00	98.90	-----	-----	85.50	36.46	15.25	38.31	0.00	286
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	7125.01	75.09	88.20	-13.11	61.66	36.50	15.25	38.32	0.00	286	7 PEAK																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	7115.00	98.90	-----	-----	85.50	36.46	15.25	38.31	0.00	286	7 PEAK																																																																																					
Avg.																																																																																																
	Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.240kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7125.01</td><td>64.77</td><td>68.20</td><td>-3.43</td><td>51.34</td><td>36.50</td><td>15.25</td><td>38.32</td><td>0.00</td><td>286</td><td>7 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7125.01	64.77	68.20	-3.43	51.34	36.50	15.25	38.32	0.00	286	7 AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.240kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7115.00</td><td>90.81</td><td>-----</td><td>-----</td><td>77.41</td><td>36.46</td><td>15.25</td><td>38.31</td><td>0.00</td><td>286</td><td>7 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7115.00	90.81	-----	-----	77.41	36.46	15.25	38.31	0.00	286
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	7125.01	64.77	68.20	-3.43	51.34	36.50	15.25	38.32	0.00	286	7 AVERAGE																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	7115.00	90.81	-----	-----	77.41	36.46	15.25	38.31	0.00	286	7 AVERAGE																																																																																					

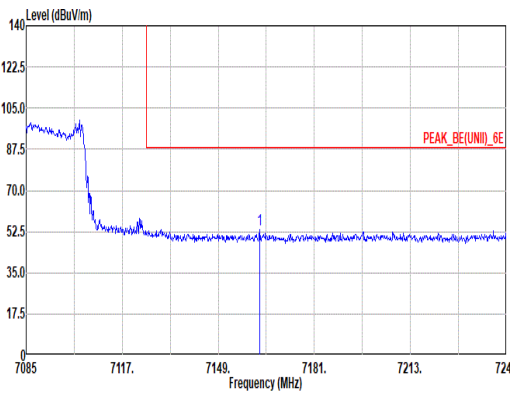
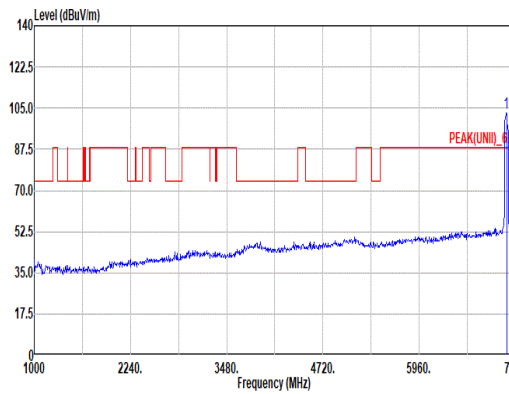
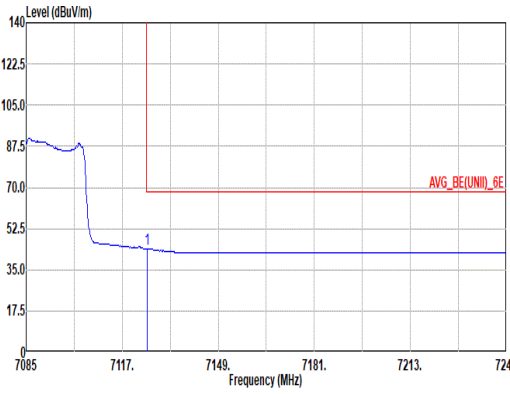
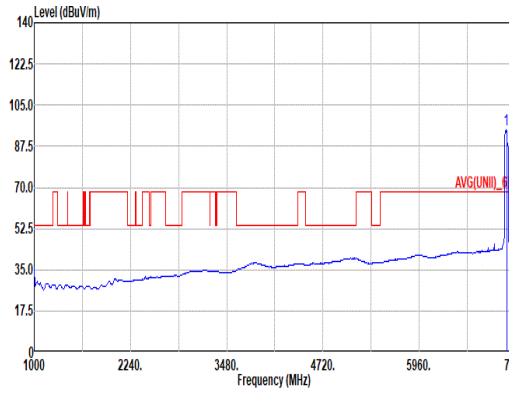


Mode	62																																																																																															
	Band Edge																																																																																															
	U-NII-8_6.875-7.125_802.11be EHT40_CH227_Full RU_7085MHz																																																																																															
ANT	1+2+3+4																																																																																															
Pol.	Horizontal						Fundamental																																																																																									
Peak																																																																																																
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7162.76</td><td>53.26</td><td>88.20</td><td>-34.94</td><td>39.57</td><td>36.75</td><td>15.29</td><td>38.35</td><td>0.00</td><td>100</td><td>91 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7162.76	53.26	88.20	-34.94	39.57	36.75	15.29	38.35	0.00	100	91 PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7085.00</td><td>102.82</td><td>-----</td><td>-----</td><td>89.63</td><td>36.26</td><td>15.21</td><td>38.28</td><td>0.00</td><td>100</td><td>91 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7085.00	102.82	-----	-----	89.63	36.26	15.21	38.28	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	7162.76	53.26	88.20	-34.94	39.57	36.75	15.29	38.35	0.00	100	91 PEAK																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	7085.00	102.82	-----	-----	89.63	36.26	15.21	38.28	0.00	100	91 PEAK																																																																																					
Avg.																																																																																																
	Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.240kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7125.32</td><td>43.93</td><td>68.20</td><td>-24.27</td><td>30.50</td><td>36.50</td><td>15.25</td><td>38.32</td><td>0.00</td><td>100</td><td>91 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7125.32	43.93	68.20	-24.27	30.50	36.50	15.25	38.32	0.00	100	91 AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.240kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7085.00</td><td>94.44</td><td>-----</td><td>-----</td><td>81.25</td><td>36.26</td><td>15.21</td><td>38.28</td><td>0.00</td><td>100</td><td>91 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7085.00	94.44	-----	-----	81.25	36.26	15.21	38.28	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	7125.32	43.93	68.20	-24.27	30.50	36.50	15.25	38.32	0.00	100	91 AVERAGE																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	7085.00	94.44	-----	-----	81.25	36.26	15.21	38.28	0.00	100	91 AVERAGE																																																																																					

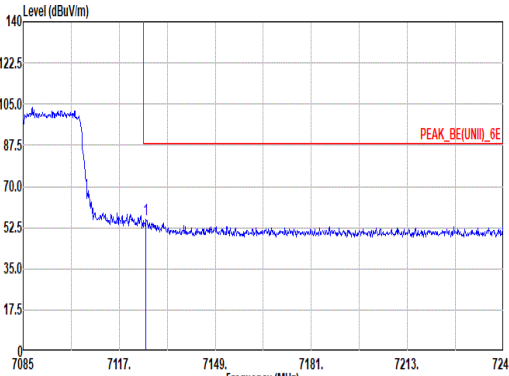
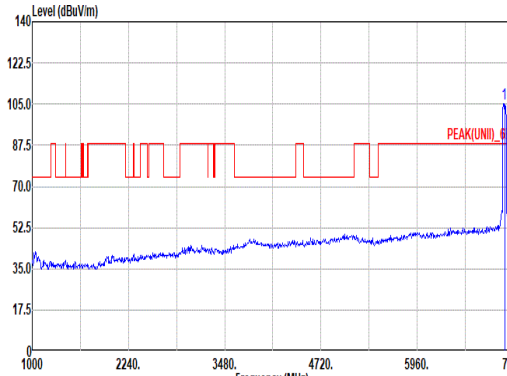
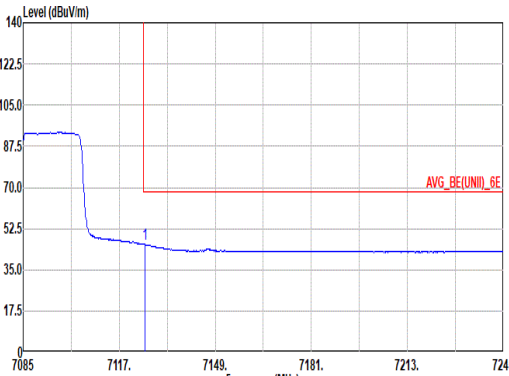
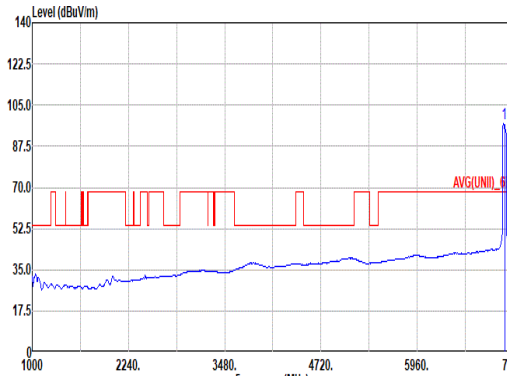


Mode	62																																																																																								
	Band Edge																																																																																								
	U-NII-8_6.875-7.125_802.11be EHT40_CH227_Full RU_7085MHz																																																																																								
ANT	1+2+3+4																																																																																								
Pol.	Vertical					Fundamental																																																																																			
Peak																																																																																									
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 7125.96</td><td>56.04</td><td>88.20</td><td>-32.16</td><td>42.60</td><td>36.51</td><td>15.25</td><td>38.32</td><td>0.00</td><td>200 82 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 7125.96	56.04	88.20	-32.16	42.60	36.51	15.25	38.32	0.00	200 82 PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 7085.00</td><td>105.25</td><td>-----</td><td>-----</td><td>92.09</td><td>36.24</td><td>15.19</td><td>38.27</td><td>0.00</td><td>200 82 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 7085.00	105.25	-----	-----	92.09	36.24	15.19	38.27	0.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																
1 7125.96	56.04	88.20	-32.16	42.60	36.51	15.25	38.32	0.00	200 82 PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																
1 7085.00	105.25	-----	-----	92.09	36.24	15.19	38.27	0.00	200 82 PEAK																																																																																
Avg.																																																																																									
	Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.240kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 7125.64</td><td>45.81</td><td>68.20</td><td>-22.39</td><td>32.37</td><td>36.51</td><td>15.25</td><td>38.32</td><td>0.00</td><td>200 82 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 7125.64	45.81	68.20	-22.39	32.37	36.51	15.25	38.32	0.00	200 82 AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.240kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 7085.00</td><td>97.13</td><td>-----</td><td>-----</td><td>83.97</td><td>36.24</td><td>15.19</td><td>38.27</td><td>0.00</td><td>200 82 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 7085.00	97.13	-----	-----	83.97	36.24	15.19	38.27	0.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																
1 7125.64	45.81	68.20	-22.39	32.37	36.51	15.25	38.32	0.00	200 82 AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																
1 7085.00	97.13	-----	-----	83.97	36.24	15.19	38.27	0.00	200 82 AVERAGE																																																																																

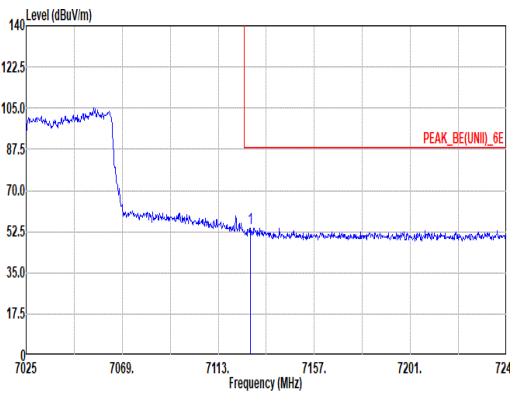
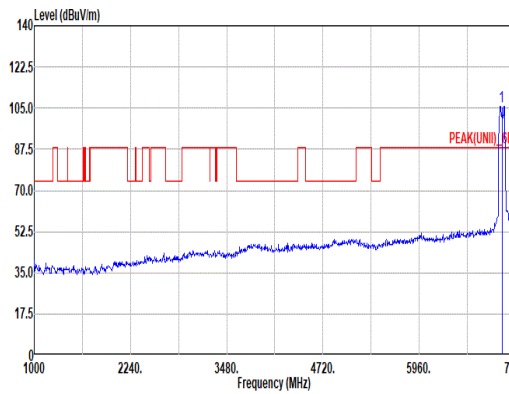
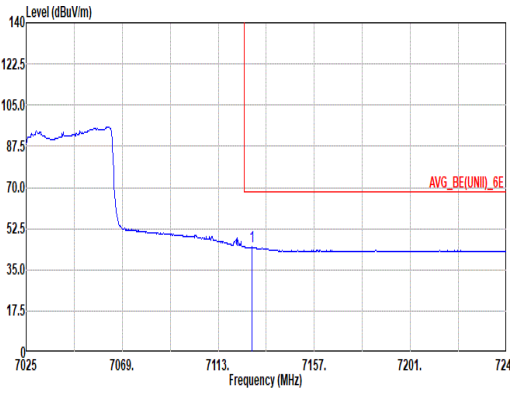
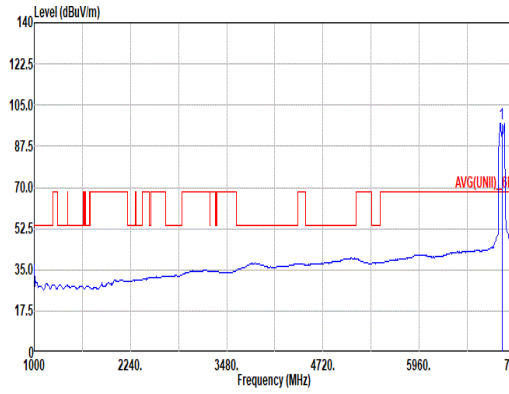


Mode	63																																																																																																		
	Band Edge																																																																																																		
	U-NII-8_6.875-7.125_802.11be EHT80_CH215_Full RU_7025MHz																																																																																																		
ANT	1+2+3+4																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7127.74</td><td>54.13</td><td>88.20</td><td>-34.07</td><td>40.68</td><td>36.52</td><td>15.25</td><td>38.32</td><td>0.00</td><td>100</td><td>65</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7127.74	54.13	88.20	-34.07	40.68	36.52	15.25	38.32	0.00	100	65	PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7025.00</td><td>105.84</td><td>-----</td><td>-----</td><td>92.72</td><td>36.20</td><td>15.17</td><td>38.25</td><td>0.00</td><td>100</td><td>65</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7025.00	105.84	-----	-----	92.72	36.20	15.17	38.25	0.00	100	65
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	7127.74	54.13	88.20	-34.07	40.68	36.52	15.25	38.32	0.00	100	65	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	7025.00	105.84	-----	-----	92.72	36.20	15.17	38.25	0.00	100	65	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7128.40</td><td>45.11</td><td>68.20</td><td>-23.09</td><td>31.65</td><td>36.53</td><td>15.25</td><td>38.32</td><td>0.00</td><td>100</td><td>65</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7128.40	45.11	68.20	-23.09	31.65	36.53	15.25	38.32	0.00	100	65	AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7025.00</td><td>97.28</td><td>-----</td><td>-----</td><td>84.34</td><td>36.03</td><td>15.13</td><td>38.22</td><td>0.00</td><td>100</td><td>65</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7025.00	97.28	-----	-----	84.34	36.03	15.13	38.22	0.00	100	65
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	7128.40	45.11	68.20	-23.09	31.65	36.53	15.25	38.32	0.00	100	65	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	7025.00	97.28	-----	-----	84.34	36.03	15.13	38.22	0.00	100	65	AVERAGE																																																																																							

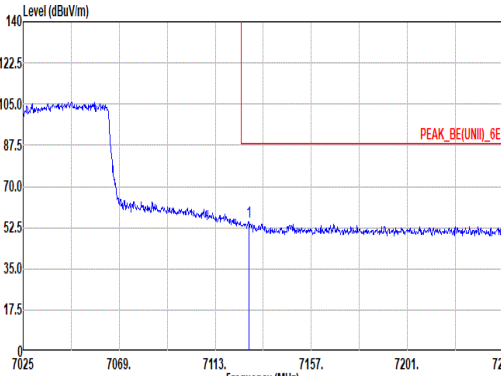
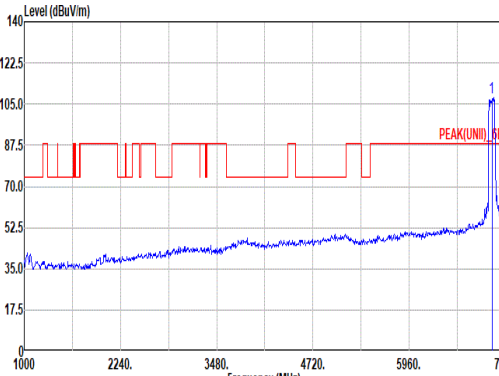
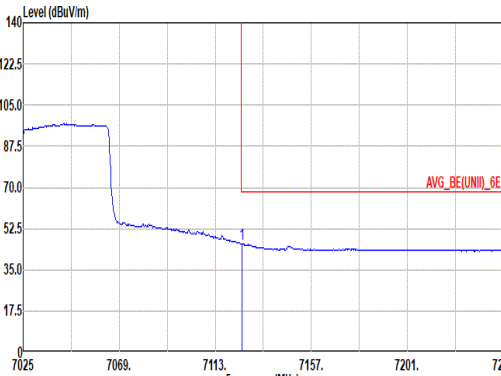
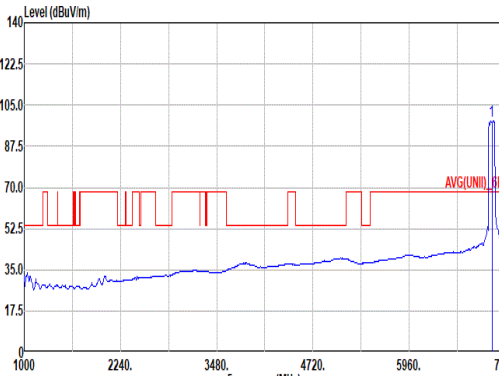


		63																																																																																															
Mode	Band Edge																																																																																																
	U-NII-8_6.875-7.125_802.11be EHT80_CH215_Full RU_7025MHz																																																																																																
ANT	1+2+3+4																																																																																																
Pol.	Vertical						Fundamental																																																																																										
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>7128.40</td><td>54.85</td><td>88.20</td><td>-33.35</td><td>41.39</td><td>36.53</td><td>15.25</td><td>38.32</td><td>0.00</td><td>200</td><td>84 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7128.40	54.85	88.20	-33.35	41.39	36.53	15.25	38.32	0.00	200	84 PEAK	 Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>7025.00</td><td>107.52</td><td>-----</td><td>-----</td><td>94.42</td><td>36.18</td><td>15.17</td><td>38.25</td><td>0.00</td><td>200</td><td>84 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7025.00	107.52	-----	-----	94.42	36.18	15.17	38.25	0.00	200	84 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	7128.40	54.85	88.20	-33.35	41.39	36.53	15.25	38.32	0.00	200	84 PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	7025.00	107.52	-----	-----	94.42	36.18	15.17	38.25	0.00	200	84 PEAK																																																																																						
Avg.	 Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>7125.10</td><td>46.01</td><td>68.20</td><td>-22.19</td><td>32.58</td><td>36.50</td><td>15.25</td><td>38.32</td><td>0.00</td><td>200</td><td>84 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7125.10	46.01	68.20	-22.19	32.58	36.50	15.25	38.32	0.00	200	84 AVERAGE	 Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>7025.00</td><td>98.45</td><td>-----</td><td>-----</td><td>85.35</td><td>36.18</td><td>15.17</td><td>38.25</td><td>0.00</td><td>200</td><td>84 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7025.00	98.45	-----	-----	85.35	36.18	15.17	38.25	0.00	200	84 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	7125.10	46.01	68.20	-22.19	32.58	36.50	15.25	38.32	0.00	200	84 AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	7025.00	98.45	-----	-----	85.35	36.18	15.17	38.25	0.00	200	84 AVERAGE																																																																																						

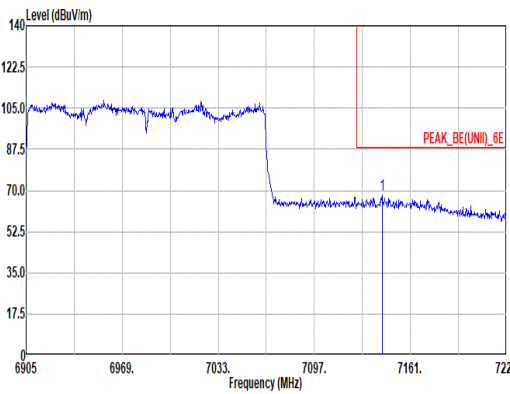
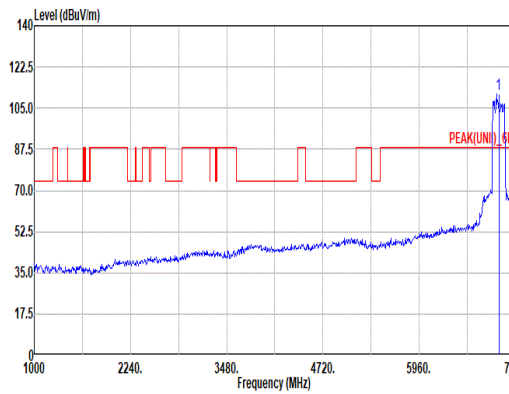
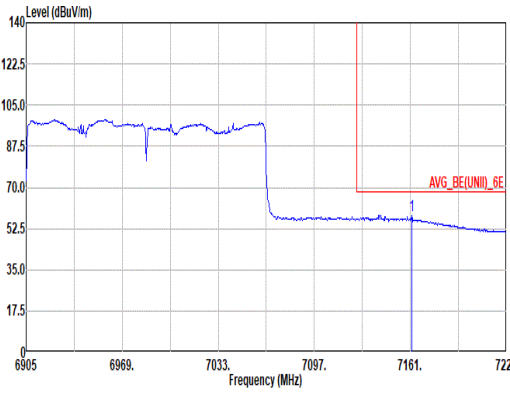
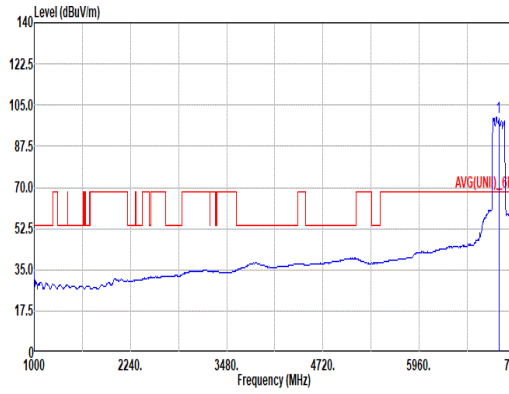


Mode	64																																																																																								
	Band Edge																																																																																								
	U-NII-8_6.875-7.125_802.11be EHT160_CH207_Full RU_6985MHz																																																																																								
ANT	1+2+3+4																																																																																								
Pol.	Horizontal					Fundamental																																																																																			
Peak																																																																																									
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 7142.12</td><td>67.98</td><td>88.20 -20.22</td><td>54.40</td><td>36.64</td><td>15.27</td><td>38.33</td><td>0.00</td><td>185</td><td>56 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7142.12	67.98	88.20 -20.22	54.40	36.64	15.27	38.33	0.00	185	56 PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 6985.00</td><td>110.95</td><td>-----</td><td>98.23</td><td>35.83</td><td>15.08</td><td>38.19</td><td>0.00</td><td>185</td><td>56 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 6985.00	110.95	-----	98.23	35.83	15.08	38.19	0.00	185
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1 7142.12	67.98	88.20 -20.22	54.40	36.64	15.27	38.33	0.00	185	56 PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1 6985.00	110.95	-----	98.23	35.83	15.08	38.19	0.00	185	56 PEAK																																																																																
Avg.																																																																																									
	Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 7161.96</td><td>58.32</td><td>68.20 -9.88</td><td>44.63</td><td>36.75</td><td>15.29</td><td>38.35</td><td>0.00</td><td>185</td><td>56 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7161.96	58.32	68.20 -9.88	44.63	36.75	15.29	38.35	0.00	185	56 AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 6985.00</td><td>100.07</td><td>-----</td><td>87.35</td><td>35.83</td><td>15.08</td><td>38.19</td><td>0.00</td><td>185</td><td>56 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 6985.00	100.07	-----	87.35	35.83	15.08	38.19	0.00	185
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1 7161.96	58.32	68.20 -9.88	44.63	36.75	15.29	38.35	0.00	185	56 AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1 6985.00	100.07	-----	87.35	35.83	15.08	38.19	0.00	185	56 AVERAGE																																																																																

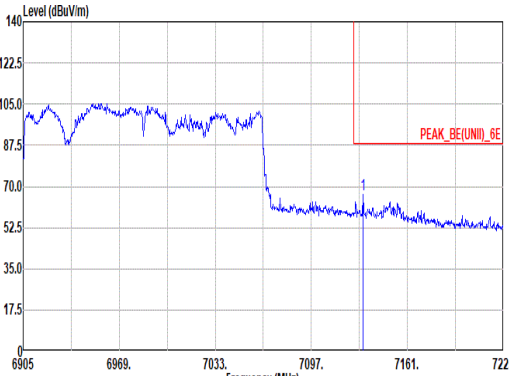
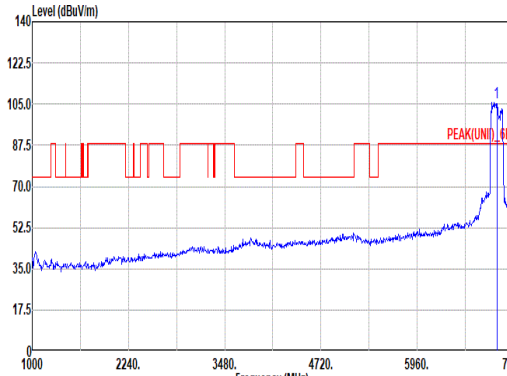
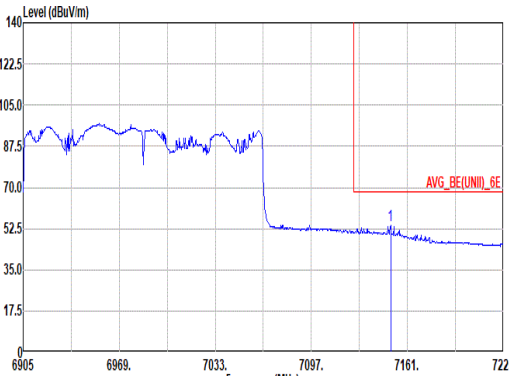
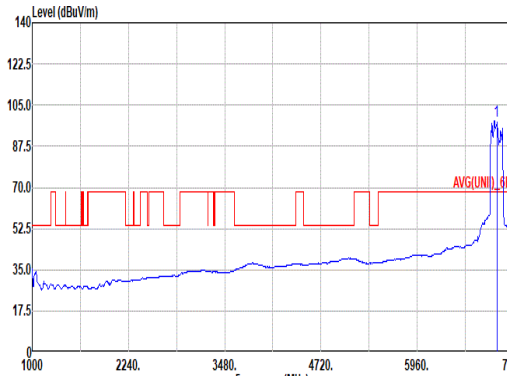


Mode	64																																																																																																		
	Band Edge																																																																																																		
	U-NII-8_6.875-7.125_802.11be EHT160_CH207_Full RU_6985MHz																																																																																																		
ANT	1+2+3+4																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>7131.56</td><td>66.61</td><td>88.20</td><td>-21.59</td><td>53.12</td><td>36.55</td><td>15.26</td><td>38.32</td><td>0.00</td><td>400 67 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7131.56	66.61	88.20	-21.59	53.12	36.55	15.26	38.32	0.00	400 67 PEAK	 Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6985.00</td><td>105.67</td><td>-----</td><td>-----</td><td>92.97</td><td>35.81</td><td>15.08</td><td>38.19</td><td>0.00</td><td>400 67 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6985.00	105.67	-----	-----	92.97	35.81	15.08	38.19	0.00	400 67 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	7131.56	66.61	88.20	-21.59	53.12	36.55	15.26	38.32	0.00	400 67 PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	6985.00	105.67	-----	-----	92.97	35.81	15.08	38.19	0.00	400 67 PEAK																																																																																									
Avg.	 Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>7149.80</td><td>53.74</td><td>68.20</td><td>-14.46</td><td>40.10</td><td>36.70</td><td>15.28</td><td>38.34</td><td>0.00</td><td>400 67 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7149.80	53.74	68.20	-14.46	40.10	36.70	15.28	38.34	0.00	400 67 AVERAGE	 Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6985.00</td><td>98.11</td><td>-----</td><td>-----</td><td>85.39</td><td>35.83</td><td>15.08</td><td>38.19</td><td>0.00</td><td>400 67 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6985.00	98.11	-----	-----	85.39	35.83	15.08	38.19	0.00	400 67 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	7149.80	53.74	68.20	-14.46	40.10	36.70	15.28	38.34	0.00	400 67 AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	6985.00	98.11	-----	-----	85.39	35.83	15.08	38.19	0.00	400 67 AVERAGE																																																																																									

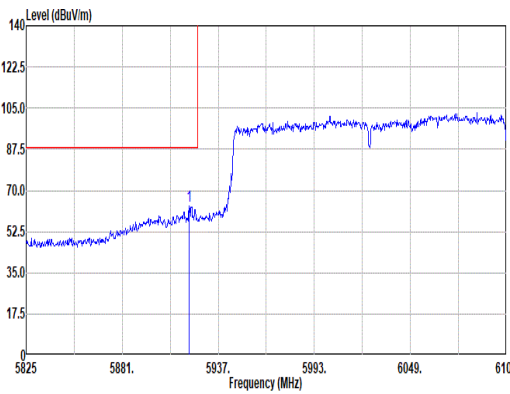
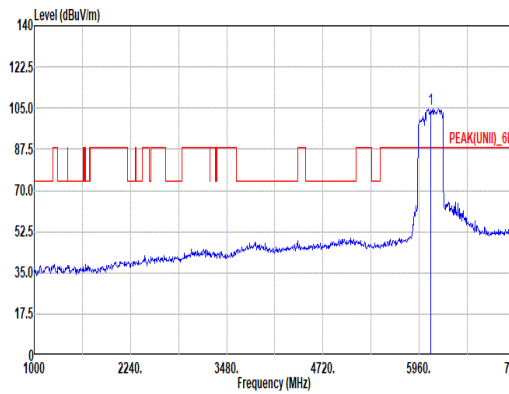
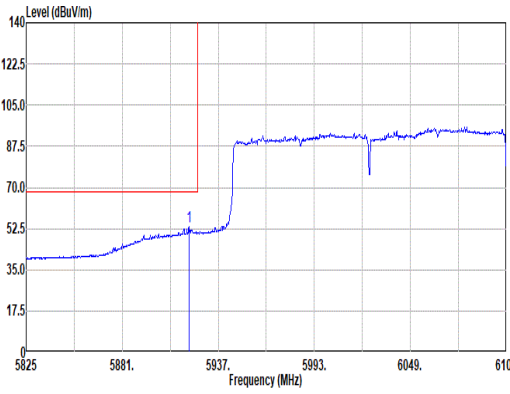
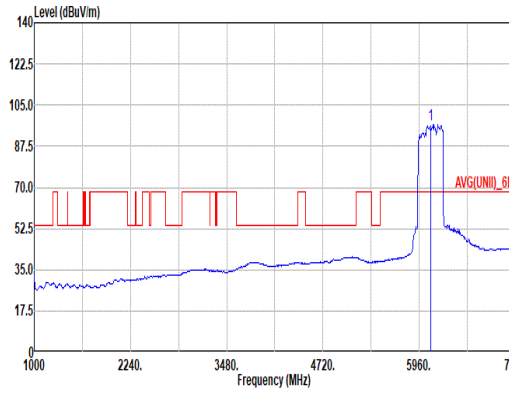


		65																																																																																																	
Mode	Band Edge																																																																																																		
	U-NII-5_5.925-6.425_802.11be EHT320_CH31_Full RU_6105MHz																																																																																																		
ANT	1+2+3+4																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5920.20</td><td>63.35</td><td>88.20</td><td>-24.85</td><td>53.03</td><td>34.30</td><td>13.95</td><td>37.93</td><td>0.00</td><td>100</td><td>127</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5920.20	63.35	88.20	-24.85	53.03	34.30	13.95	37.93	0.00	100	127	PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6105.00</td><td>104.61</td><td>-----</td><td>-----</td><td>93.97</td><td>34.32</td><td>14.26</td><td>37.94</td><td>0.00</td><td>100</td><td>127</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6105.00	104.61	-----	-----	93.97	34.32	14.26	37.94	0.00	100	127
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5920.20	63.35	88.20	-24.85	53.03	34.30	13.95	37.93	0.00	100	127	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	6105.00	104.61	-----	-----	93.97	34.32	14.26	37.94	0.00	100	127	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5919.92</td><td>53.33</td><td>68.20</td><td>-14.87</td><td>43.01</td><td>34.30</td><td>13.95</td><td>37.93</td><td>0.00</td><td>100</td><td>127</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5919.92	53.33	68.20	-14.87	43.01	34.30	13.95	37.93	0.00	100	127	AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6105.00</td><td>96.80</td><td>-----</td><td>-----</td><td>86.36</td><td>34.18</td><td>14.20</td><td>37.94</td><td>0.00</td><td>100</td><td>127</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6105.00	96.80	-----	-----	86.36	34.18	14.20	37.94	0.00	100	127
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5919.92	53.33	68.20	-14.87	43.01	34.30	13.95	37.93	0.00	100	127	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	6105.00	96.80	-----	-----	86.36	34.18	14.20	37.94	0.00	100	127	AVERAGE																																																																																							

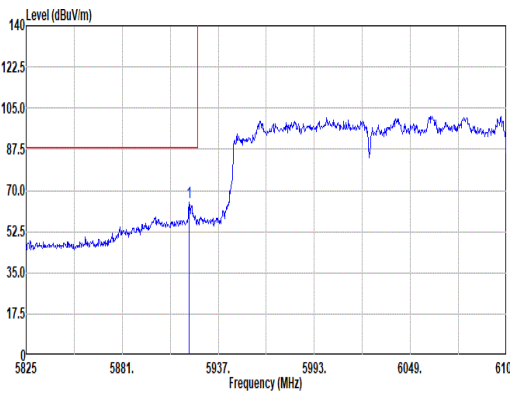
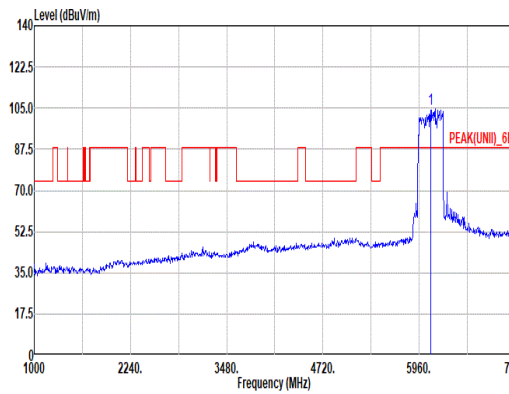
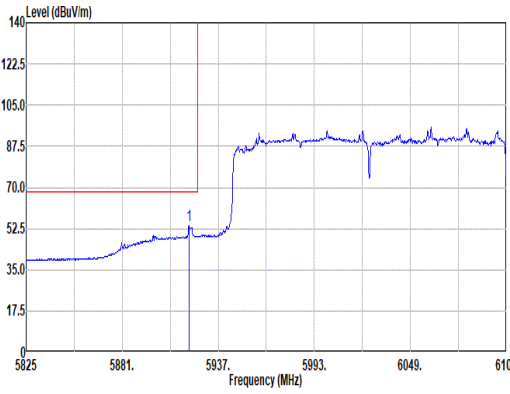
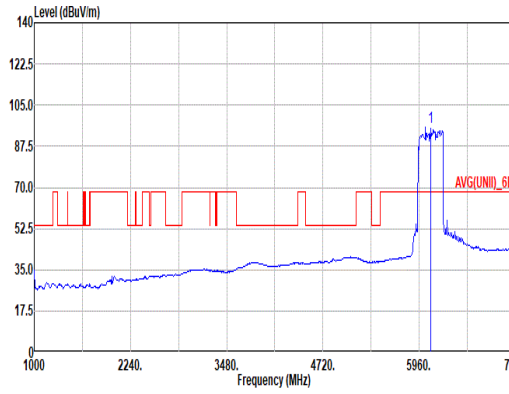


Mode	65																																																																																																
	Band Edge																																																																																																
	U-NII-5_5.925-6.425_802.11be EHT320_CH31_Full RU_6105MHz																																																																																																
ANT	1+2+3+4																																																																																																
Pol.	Vertical						Fundamental																																																																																										
Peak																																																																																																	
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5920.20</td><td>64.76</td><td>88.20</td><td>-23.44</td><td>54.44</td><td>34.30</td><td>13.95</td><td>37.93</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5920.20	64.76	88.20	-23.44	54.44	34.30	13.95	37.93	0.00	100	0	PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6105.00</td><td>104.47</td><td>-----</td><td>-----</td><td>93.96</td><td>34.23</td><td>14.22</td><td>37.94</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	6105.00	104.47	-----	-----	93.96	34.23	14.22	37.94	0.00	100	0
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	5920.20	64.76	88.20	-23.44	54.44	34.30	13.95	37.93	0.00	100	0	PEAK																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	6105.00	104.47	-----	-----	93.96	34.23	14.22	37.94	0.00	100	0	PEAK																																																																																					
Avg.																																																																																																	
	Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5919.92</td><td>53.85</td><td>68.20</td><td>-14.35</td><td>43.53</td><td>34.30</td><td>13.95</td><td>37.93</td><td>0.00</td><td>100</td><td>0</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5919.92	53.85	68.20	-14.35	43.53	34.30	13.95	37.93	0.00	100	0	AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6105.00</td><td>95.42</td><td>-----</td><td>-----</td><td>85.14</td><td>34.10</td><td>14.11</td><td>37.93</td><td>0.00</td><td>100</td><td>0</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	6105.00	95.42	-----	-----	85.14	34.10	14.11	37.93	0.00	100	0
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	5919.92	53.85	68.20	-14.35	43.53	34.30	13.95	37.93	0.00	100	0	AVERAGE																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	6105.00	95.42	-----	-----	85.14	34.10	14.11	37.93	0.00	100	0	AVERAGE																																																																																					

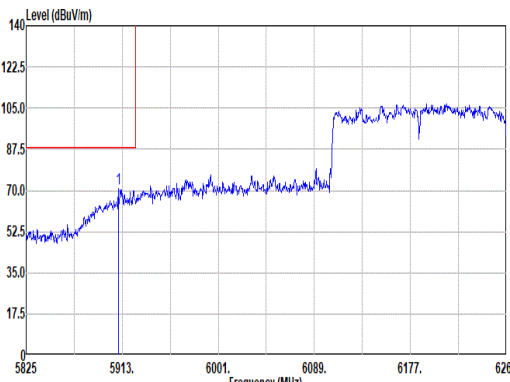
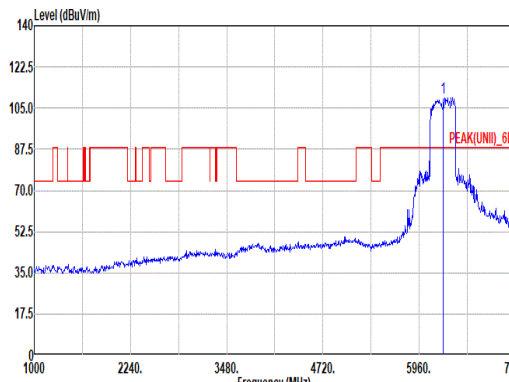
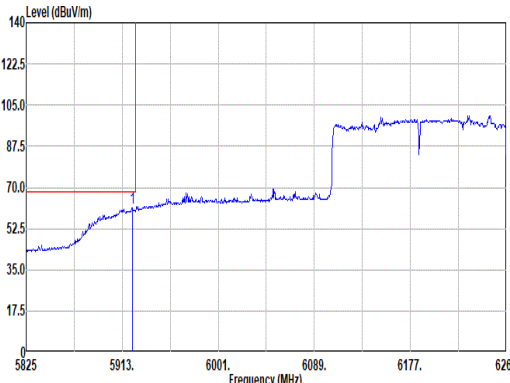
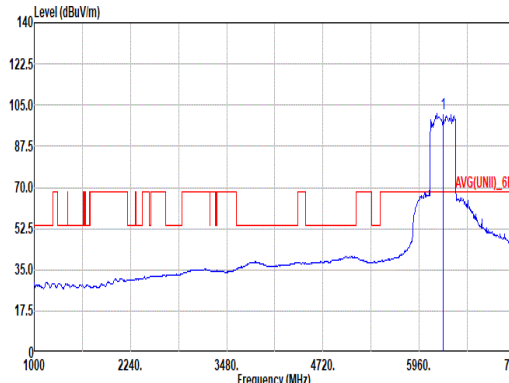


		66																																																																																																	
Mode	Band Edge																																																																																																		
	U-NII-5_5.925-6.425_802.11be EHT320_CH63_Full RU_6265MHz																																																																																																		
ANT	1+2+3+4																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5909.48</td><td>70.84</td><td>88.20</td><td>-17.36</td><td>60.53</td><td>34.30</td><td>13.94</td><td>37.93</td><td>0.00</td><td>200</td><td>10</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5909.48	70.84	88.20	-17.36	60.53	34.30	13.94	37.93	0.00	200	10	PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6265.00</td><td>109.55</td><td>-----</td><td>-----</td><td>98.59</td><td>34.55</td><td>14.36</td><td>37.95</td><td>0.00</td><td>200</td><td>10</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6265.00	109.55	-----	-----	98.59	34.55	14.36	37.95	0.00	200	10
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5909.48	70.84	88.20	-17.36	60.53	34.30	13.94	37.93	0.00	200	10	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	6265.00	109.55	-----	-----	98.59	34.55	14.36	37.95	0.00	200	10	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5922.24</td><td>61.12</td><td>68.20</td><td>-7.08</td><td>50.79</td><td>34.30</td><td>13.96</td><td>37.93</td><td>0.00</td><td>200</td><td>10</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5922.24	61.12	68.20	-7.08	50.79	34.30	13.96	37.93	0.00	200	10	AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6265.00</td><td>101.48</td><td>-----</td><td>-----</td><td>90.90</td><td>34.28</td><td>14.24</td><td>37.94</td><td>0.00</td><td>200</td><td>10</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6265.00	101.48	-----	-----	90.90	34.28	14.24	37.94	0.00	200	10
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5922.24	61.12	68.20	-7.08	50.79	34.30	13.96	37.93	0.00	200	10	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	6265.00	101.48	-----	-----	90.90	34.28	14.24	37.94	0.00	200	10	AVERAGE																																																																																							

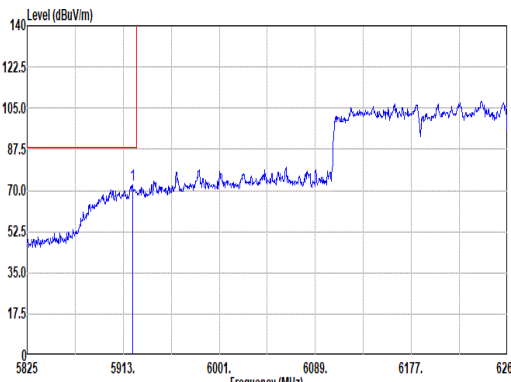
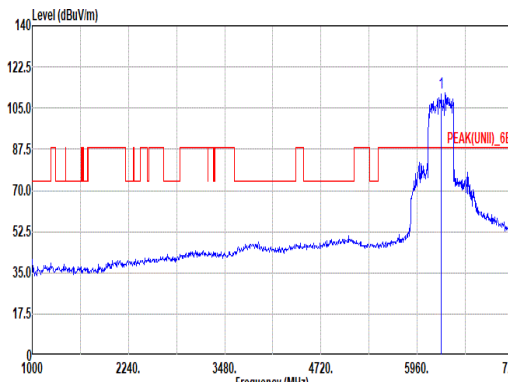
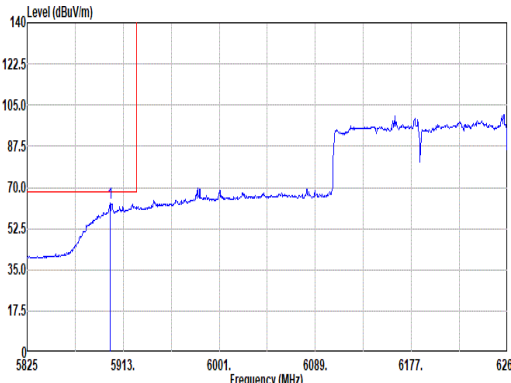
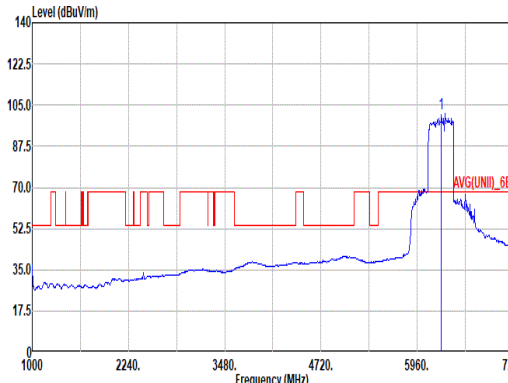


Mode	66																																																																																	
	Band Edge																																																																																	
	U-NII-5_5.925-6.425_802.11be EHT320_CH63_Full RU_6265MHz																																																																																	
ANT	1+2+3+4																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5913.36</td><td>72.44</td><td>88.20</td><td>-15.76</td><td>62.12</td><td>34.30</td><td>13.95</td><td>37.93</td><td>0.00</td><td>100 73 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5913.36	72.44	88.20	-15.76	62.12	34.30	13.95	37.93	0.00	100 73 PEAK	 Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 6265.00</td><td>111.41</td><td>-----</td><td>-----</td><td>100.46</td><td>34.54</td><td>14.36</td><td>37.95</td><td>0.00</td><td>100 73 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 6265.00	111.41	-----	-----	100.46	34.54	14.36	37.95	0.00	100 73 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 5913.36	72.44	88.20	-15.76	62.12	34.30	13.95	37.93	0.00	100 73 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 6265.00	111.41	-----	-----	100.46	34.54	14.36	37.95	0.00	100 73 PEAK																																																																									
Avg.	 Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5901.12</td><td>63.29</td><td>68.20</td><td>-4.91</td><td>53.00</td><td>34.30</td><td>13.92</td><td>37.93</td><td>0.00</td><td>100 73 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5901.12	63.29	68.20	-4.91	53.00	34.30	13.92	37.93	0.00	100 73 AVERAGE	 Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 6265.00</td><td>101.64</td><td>-----</td><td>-----</td><td>90.69</td><td>34.54</td><td>14.36</td><td>37.95</td><td>0.00</td><td>100 73 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 6265.00	101.64	-----	-----	90.69	34.54	14.36	37.95	0.00	100 73 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 5901.12	63.29	68.20	-4.91	53.00	34.30	13.92	37.93	0.00	100 73 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 6265.00	101.64	-----	-----	90.69	34.54	14.36	37.95	0.00	100 73 AVERAGE																																																																									

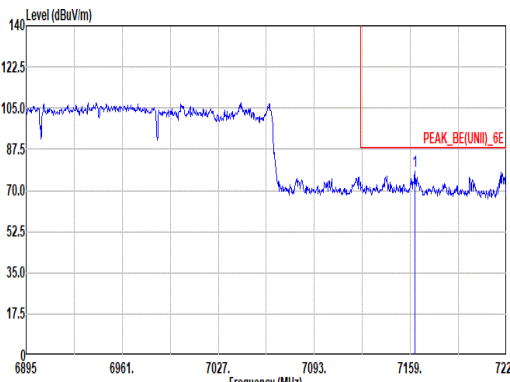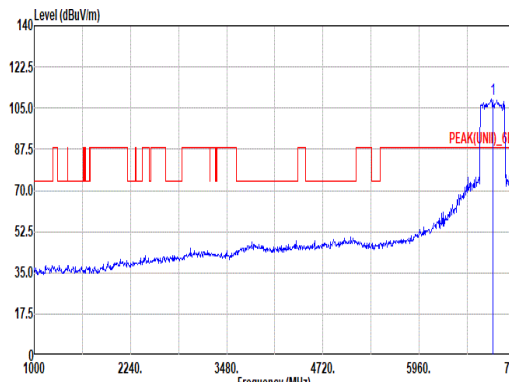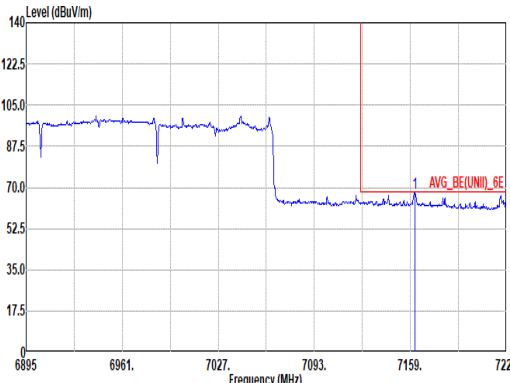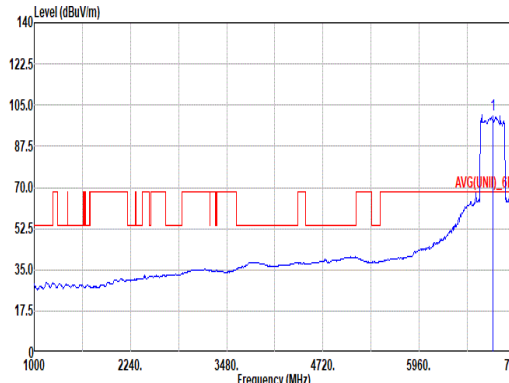

Mode	67																																																																																																											
	Band Edge																																																																																																											
	U-NII-8_6.875-7.125_802.11be EHT320_CH191_Full RU_6905MHz																																																																																																											
ANT	1+2+3+4																																																																																																											
Pol.	Horizontal																																																																																																											
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7161.97</td><td>77.97</td><td>88.20</td><td>-10.23</td><td>64.28</td><td>36.75</td><td>15.29</td><td>38.35</td><td>0.00</td><td>200</td><td>0 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7161.97	77.97	88.20	-10.23	64.28	36.75	15.29	38.35	0.00	200	0 PEAK	 Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6905.00</td><td>100.75</td><td>-----</td><td>-----</td><td>96.07</td><td>35.00</td><td>15.03</td><td>38.15</td><td>0.00</td><td>200</td><td>0 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6905.00	100.75	-----	-----	96.07	35.00	15.03	38.15	0.00	200	0 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	7161.97	77.97	88.20	-10.23	64.28	36.75	15.29	38.35	0.00	200	0 PEAK																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	6905.00	100.75	-----	-----	96.07	35.00	15.03	38.15	0.00	200	0 PEAK																																																																																																	
Avg.	 Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7162.30</td><td>67.86</td><td>68.20</td><td>-0.34</td><td>54.17</td><td>36.75</td><td>15.29</td><td>38.35</td><td>0.00</td><td>200</td><td>0 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7162.30	67.86	68.20	-0.34	54.17	36.75	15.29	38.35	0.00	200	0 AVERAGE	 Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6905.00</td><td>100.92</td><td>-----</td><td>-----</td><td>88.13</td><td>35.97</td><td>14.91</td><td>38.09</td><td>0.00</td><td>200</td><td>0 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6905.00	100.92	-----	-----	88.13	35.97	14.91	38.09	0.00	200	0 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	7162.30	67.86	68.20	-0.34	54.17	36.75	15.29	38.35	0.00	200	0 AVERAGE																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	6905.00	100.92	-----	-----	88.13	35.97	14.91	38.09	0.00	200	0 AVERAGE																																																																																																	

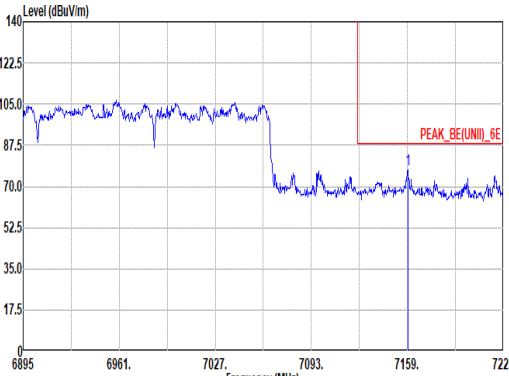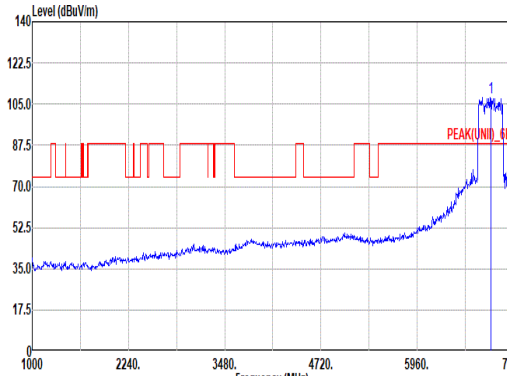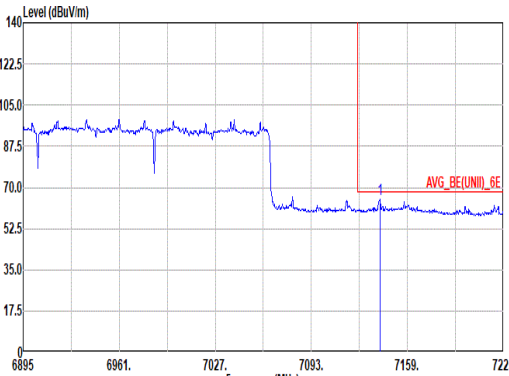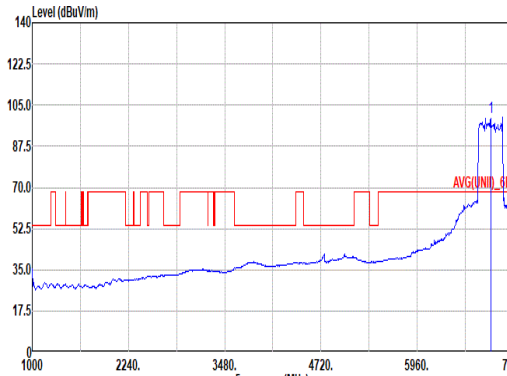

		67																																																																																																	
Mode	Band Edge																																																																																																		
	U-NII-8_6.875-7.125_802.11be EHT320_CH191_Full RU_6905MHz																																																																																																		
ANT	1+2+3+4																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7159.33</td><td>77.07</td><td>88.20</td><td>-11.13</td><td>63.38</td><td>36.74</td><td>15.29</td><td>38.34</td><td>0.00</td><td>100</td><td>257</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7159.33	77.07	88.20	-11.13	63.38	36.74	15.29	38.34	0.00	100	257	PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6905.00</td><td>107.63</td><td>-----</td><td>-----</td><td>94.96</td><td>35.00</td><td>15.03</td><td>38.16</td><td>0.00</td><td>100</td><td>257</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6905.00	107.63	-----	-----	94.96	35.00	15.03	38.16	0.00	100	257
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	7159.33	77.07	88.20	-11.13	63.38	36.74	15.29	38.34	0.00	100	257	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	6905.00	107.63	-----	-----	94.96	35.00	15.03	38.16	0.00	100	257	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH20-HY Condition: AVG_BE(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7140.19</td><td>64.74</td><td>68.20</td><td>-3.46</td><td>51.18</td><td>36.62</td><td>15.27</td><td>38.33</td><td>0.00</td><td>100</td><td>257</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7140.19	64.74	68.20	-3.46	51.18	36.62	15.27	38.33	0.00	100	257	AVERAGE	Site : 03CH20-HY Condition: AVG(UNII)_6E 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6905.00</td><td>99.96</td><td>-----</td><td>-----</td><td>86.83</td><td>36.21</td><td>15.18</td><td>38.26</td><td>0.00</td><td>100</td><td>257</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6905.00	99.96	-----	-----	86.83	36.21	15.18	38.26	0.00	100	257
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	7140.19	64.74	68.20	-3.46	51.18	36.62	15.27	38.33	0.00	100	257	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	6905.00	99.96	-----	-----	86.83	36.21	15.18	38.26	0.00	100	257	AVERAGE																																																																																							





Appendix D. Duty Cycle Plots


<CDD Mode>

<Nss=1>

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1+2+3+4	802.11a	94.94	2065	0.48	0.51kHz
1+2+3+4	6GHz 802.11be EHT20 Full RU	97.71	1495	0.67	0.68kHz
1+2+3+4	6GHz 802.11be EHT40 Full RU	95.71	780.00	1.28	1.3kHz
1+2+3+4	6GHz 802.11be EHT80 Full RU	92.31	408.00	2.45	2.7kHz
1+2+3+4	6GHz 802.11be EHT160 Full RU	88.24	240.00	4.17	4.3kHz
1+2+3+4	6GHz 802.11be EHT320 Full RU	88.24	240.00	4.17	4.3kHz

MIMO <Ant. 1+2+3+4>

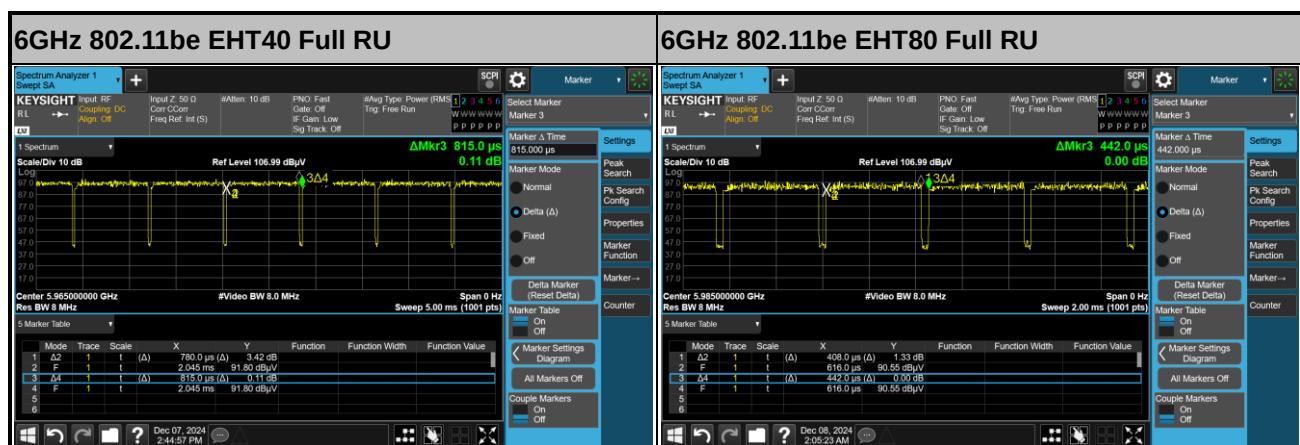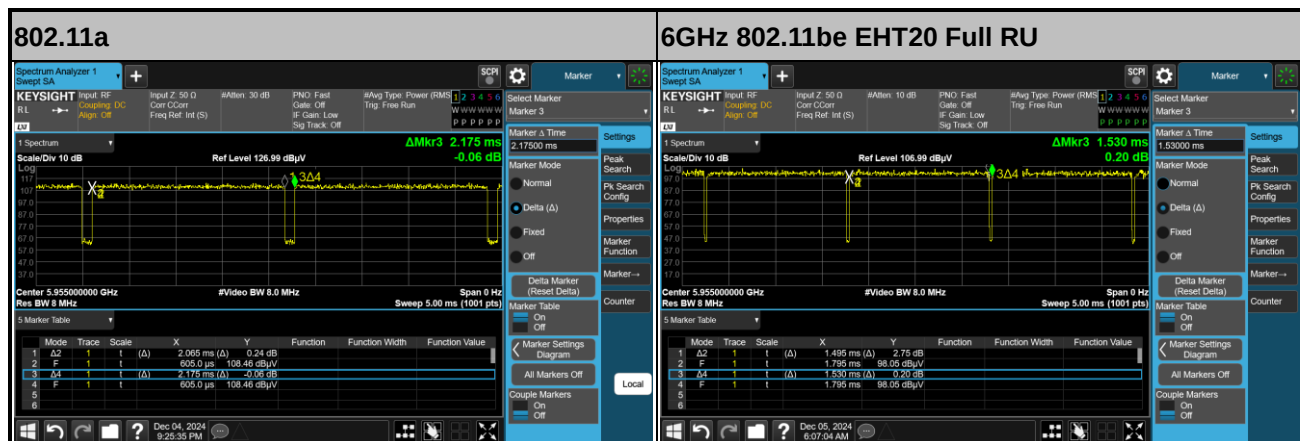


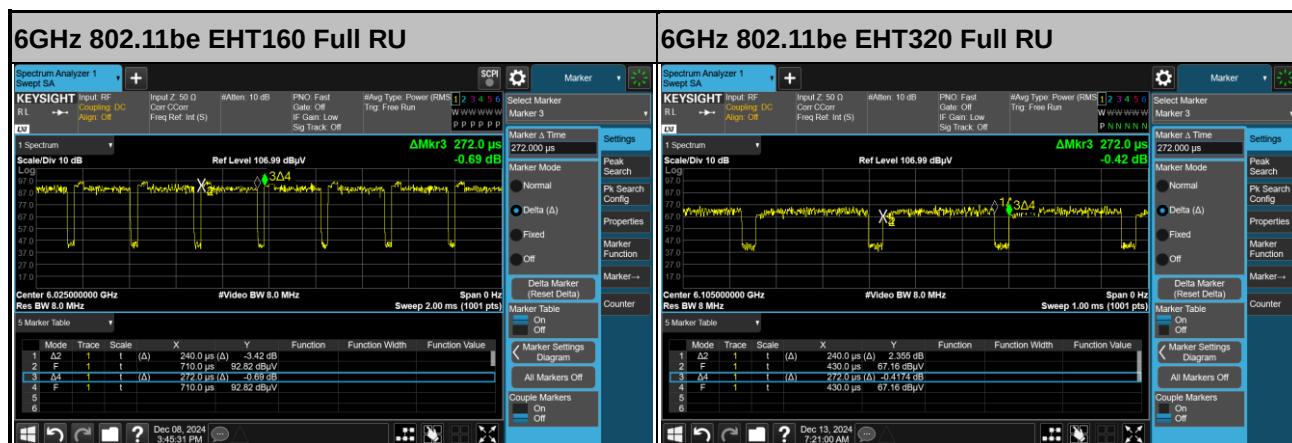

<Nss=2>


Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1+2+3+4	6GHz 802.11be EHT20 Full RU	95.97	786.00	1.27	1.3kHz
1+2+3+4	6GHz 802.11be EHT40 Full RU	93.48	430.00	2.33	2.4kHz
1+2+3+4	6GHz 802.11be EHT80 Full RU	88.57	248.00	4.03	4.3kHz
1+2+3+4	6GHz 802.11be EHT160 Full RU	83.51	162.00	6.17	6.2kHz
1+2+3+4	6GHz 802.11be EHT320 Full RU	83.51	162.00	6.17	6.2kHz

MIMO <Ant. 1+2+3+4>

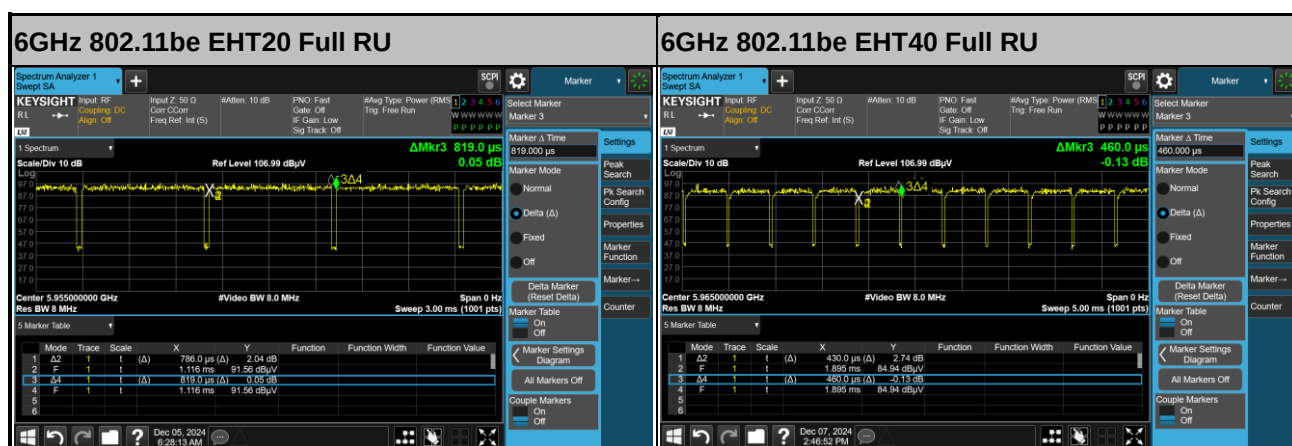





6GHz 802.11be EHT80 Full RU

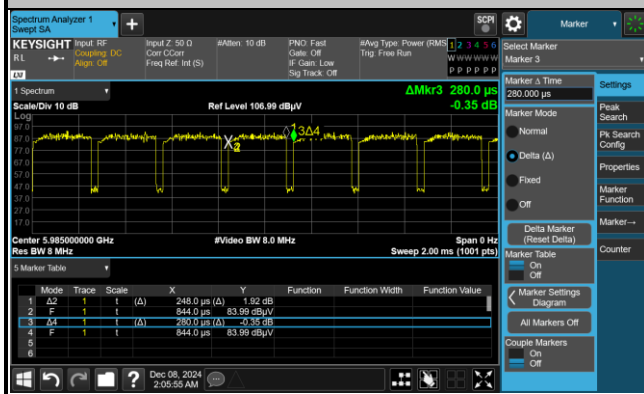

6GHz 802.11be EHT160 Full RU

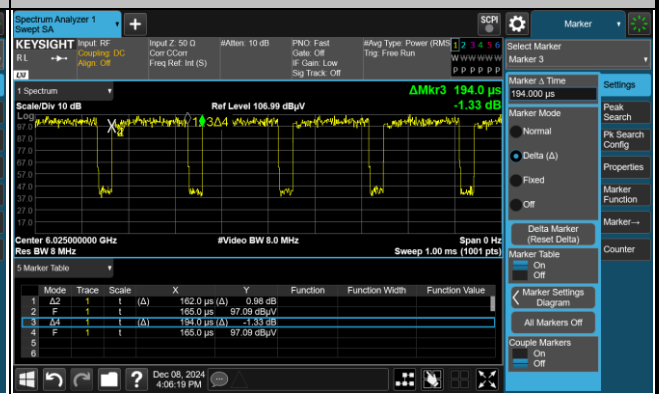

6GHz 802.11be EHT320 Full RU


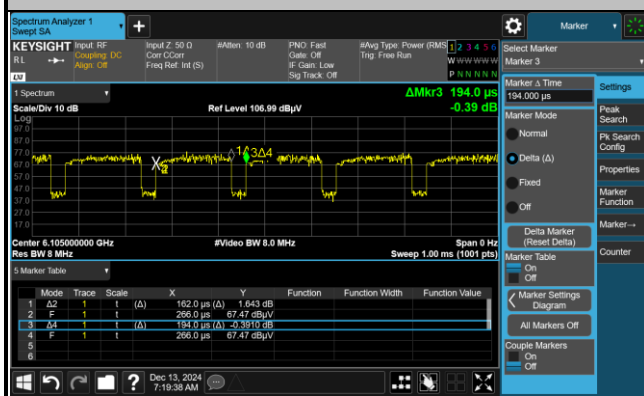





<TXBF Mode>

<Nss=1>

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1+2+3+4	6GHz 802.11be EHT20 Full RU	88.60	3110	0.32	0.33kHz
1+2+3+4	6GHz 802.11be EHT40 Full RU	93.55	4640	0.22	0.24kHz
1+2+3+4	6GHz 802.11be EHT80 Full RU	92.83	4400	0.23	0.24kHz
1+2+3+4	6GHz 802.11be EHT160 Full RU	92.31	4560	0.22	0.24kHz
1+2+3+4	6GHz 802.11be EHT320 Full RU	77.66	1060	0.94	1kHz

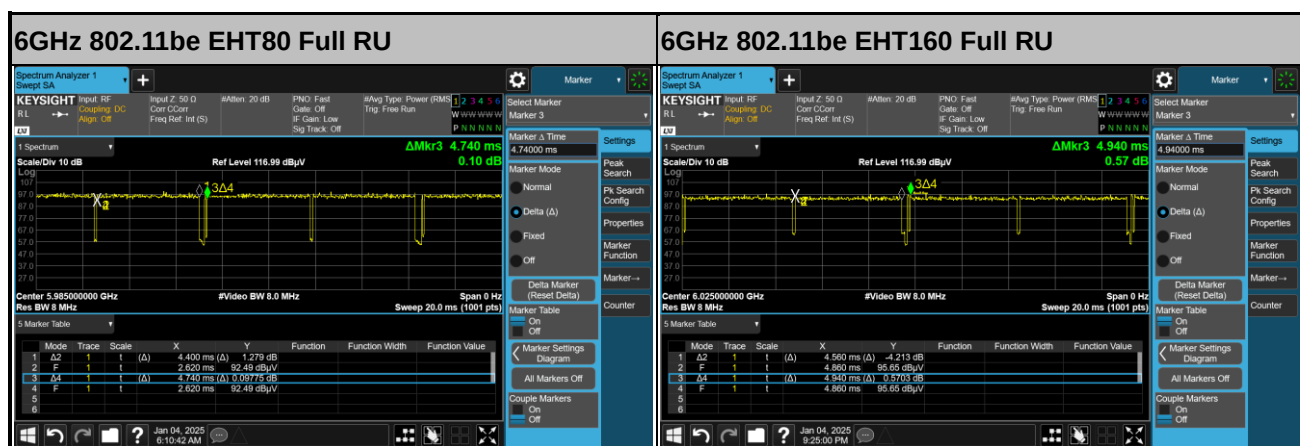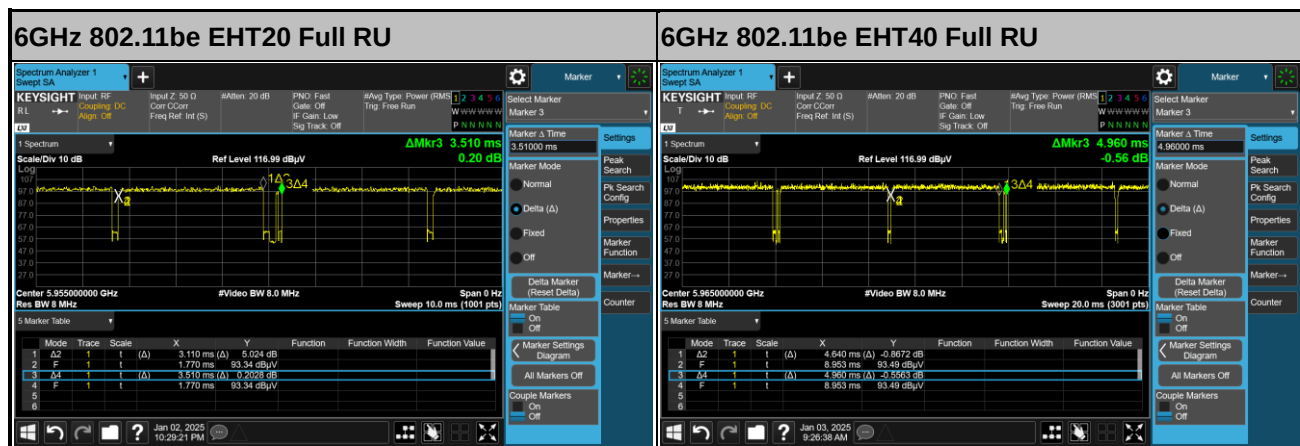

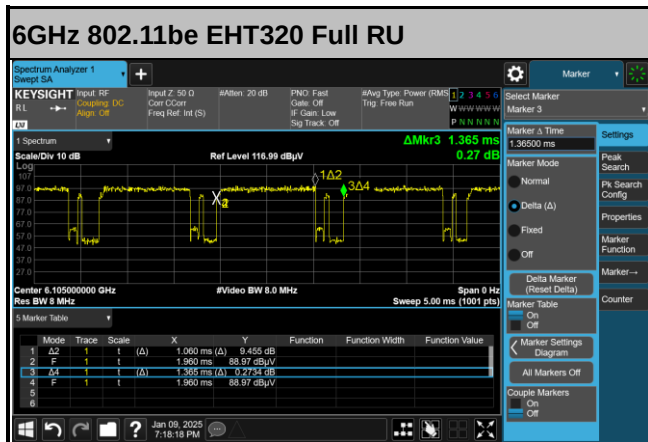

<Nss=2>

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1+2+3+4	6GHz 802.11be EHT20 Full RU	92.81	4650	0.22	0.24kHz
1+2+3+4	6GHz 802.11be EHT40 Full RU	92.67	4627	0.22	0.24kHz
1+2+3+4	6GHz 802.11be EHT80 Full RU	93.04	5080	0.20	0.20kHz
1+2+3+4	6GHz 802.11be EHT160 Full RU	93.82	5010	0.20	0.20kHz
1+2+3+4	6GHz 802.11be EHT320 Full RU	78.52	1060	0.94	1kHz

