

Antenna Gain Measurement Report

Report No.: RFBEDV-WTW-P23030565-5

FCC ID: G95MGA5331

Model No.: MGA5331

Received Date: 2023/3/16

Test Date: 2023/6/2 ~ 2023/6/6

Issued Date: 2023/7/27

Applicant: Vantiva USA LLC

Address: 4855 Peachtree Industrial Blvd. Suite 200 Norcross, Georgia 30092

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kewi Shan Dist., Taoyuan City
33383, Taiwan

FCC Registration /

Designation Number: 788550 / TW0003

Prepared by :



Date: 2023/7/27

Pettie Chen / Senior Specialist

Approved by :



Date: 2023/7/27

Jeremy Lin / Project Engineer

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 EUT Antenna System Description	4
1.1 Antenna Information	4
1.2 Antenna Location	4
2 2D Antenna Pattern Measurement	5
2.1 Test Location	5
2.2 Test Measurement procedure	5
2.3 Test Setup Diagram @ Fully Anechoic Chamber	5
2.4 Test Setup Diagram for EUT	6
2.5 Test Instruments	6
2.6 Measurement Uncertainty	7
2.7 Test Procedure	8
2.8 Test Result	8
2.9 2D Pattern Test Plots	9
3 Appendix - Information of the Testing Laboratories	14

Release Control Record

Issue No.	Description	Date Issued
RFBEDV-WTW-P23030565-5	Original release.	2023/7/27

1 EUT Antenna System Description

1.1 Antenna Information

Antenna Type	PCB			
Connector Type	ipex(MHF)			
Frequency (MHz)	Max Gain (dBi)			
	Chain 0	Chain 1	Chain 2	Chain 3
2.4GHz	1.28	-0.72	-4.58	-2.14
5G Band 1	1.51	-0.18	0.73	-0.12
5G Band 2	1.03	1.28	2.03	0.09
5G Band 3	2.62	-0.26	2.19	2.19
5G Band 4	0.47	-0.29	2.81	0.47

1.2 Antenna Location

Please refer to report No.: BEDV-WTW-P23030565

2 2D Antenna Pattern Measurement

2.1 Test Location

2D antenna pattern measurement in Fully Anechoic Chamber

2.2 Test Measurement procedure

CISPR 16-1-6

ANSI 63.10-2013 clause 13

KDB 412172 D01 Determining ERP and EIRP v01r01

2.3 Test Setup Diagram @ Fully Anechoic Chamber

The 2D antenna pattern measurement is using the test system (refer to Figure 1). The EUT is positioned on center of turntable, for Free Space only in fully anechoic chamber. Data (Raw Value) is recorded using the spectrum analyzer at each position.

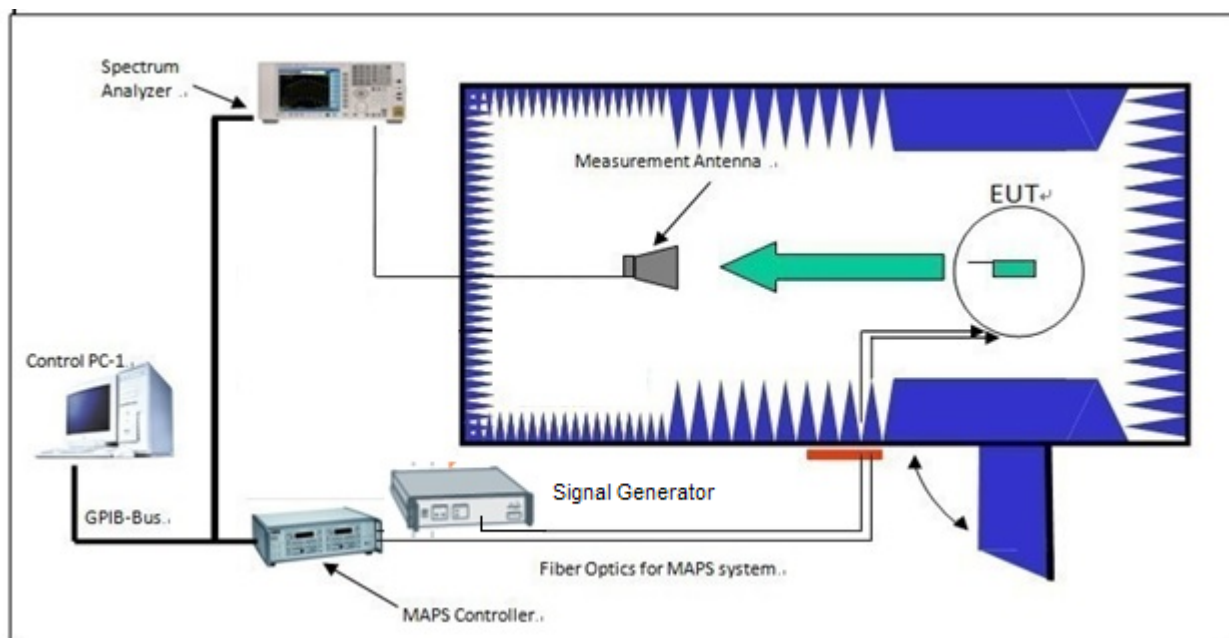


Figure 1. 2D antenna pattern test system.

2.4 Test Setup Diagram for EUT

Please refer to the attached file (Test Setup Photo)

2.5 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration				
PXA Signal Analyzer KEYSIGHT	N9030B	MY57141948	May 19, 2023	May 18, 2024				
BILOG Antenna SCHWARZBECK	VULB 9168	9168-158	Oct. 25, 2022	Oct. 24, 2023				
HORN Antenna ETS	3117	00034128	Nov. 13, 2022	Nov. 12, 2023				
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Nov. 13, 2022	Nov. 12, 2023				
Preamplifier Agilent	8449B	3008A01963	Jul. 09, 2022	Jul. 08, 2023				
Preamplifier Agilent	8447D	2944A10627	Jul. 09, 2022	Jul. 08, 2023				
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-RF1-03 (223650/4)	Jul. 09, 2022	Jul. 08, 2023				
RF signal cable WOKEN	8D-FB	Cable-RF1-01	Jul. 09, 2022	Jul. 08, 2023				
RF signal cable INFINET	CA3501-3501- G.90 (3m) & CA3501-3501- F.90 (2m)	INF090 (3m)*2 & TCF427S (2m)*1	Jul. 09, 2022	Jul. 08, 2023				
Software ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA				
Antenna Tower Max-Full	MFA-440H	9707	NA	NA				
Turn Table ADT	NA	SN40303	NA	NA				
Controller Max-Full	MF-7802	MF7802093	NA	NA				
Temperature & Humidity chamber TERCHY	MHU-225AU	920842	Jun. 21, 2022	Jun. 20, 2023				
Splitters/Combiners Mini-Circuits	ZN2PD-9G	NA	Jun. 09, 2022	Jun. 08, 2023				
26GHz ~ 40GHz Amplifier EMC	EMC184045B	980175	Sep. 03, 2022	Sep. 02, 2023				
Absorber 30 MHz ~ 40GHz	TDK / IP-045C	NA	NA	NA				
TYPICAL ABSORPTION CHARACTERISTICS (VERTICAL INCIDENCE)								
Material name	30MHz	50MHz	100MHz	500MHz	1GHz	5GHz	18GHz	40GHz
IP-045C	18	18	15	20	20	30	40	40

- Note:
1. The test was performed in HwaYa RF Chamber 1.
 2. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1 GHz if tested.
 3. The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2.6 Measurement Uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Frequency Range	Uncertainty ($\pm$)
1 GHz ~ 18 GHz	3.294 dB

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.7 Test Procedure

- Connect the EUT antenna connector to the signal generator.
- Fasten the EUT to the locator in the center of the turntable, leaving only free space.
- Transmit a 0 dBm power level from the signal generator to the EUT antenna connector. Please refer to Figure 2 for detailed configuration.
- Make sure the transmit signal is stable at the maximum RF power level.
- Read the power level on the spectrum analyzer and record it in the following locations.
- The EUT is placed on a turntable that rotates 360° in 1° steps. Measure the E and H plane patterns.
- The turntable should be stepped from 0° to 360° with a maximum angular resolution of 1°. The 360° measurement should be compared to the 0° value to complete the pattern.
- According to section 2.3 of KDB 412172 D01 Determining ERP and EIRP v01r01, the substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Raw Value". Record the power level of S.G.

$$\text{EIRP} = P_{\text{SigGen}} + G_T - L_C$$

where:

P_{SigGen} = power setting of the signal generator that produces the same received power reading as the DUT, in dBm.

G_T = gain of the substitute antenna, in dBd (ERP) or dBi (EIRP);


L_C = signal loss in the cable connecting the signal generator to the substitute antenna, in dB.

2.8 Test Result

Tested By	Jeff Chen
-----------	-----------

Frequency (MHz)	Max Gain (dBi)			
	Chain 0	Chain 1	Chain 2	Chain 3
2.4GHz	1.28	-0.72	-4.58	-2.14
5G Band 1	1.51	-0.18	0.73	-0.12
5G Band 2	1.03	1.28	2.03	0.09
5G Band 3	2.62	-0.26	2.19	0.73
5G Band 4	0.47	-0.29	2.81	0.47

2.9 2D Pattern Test Plots

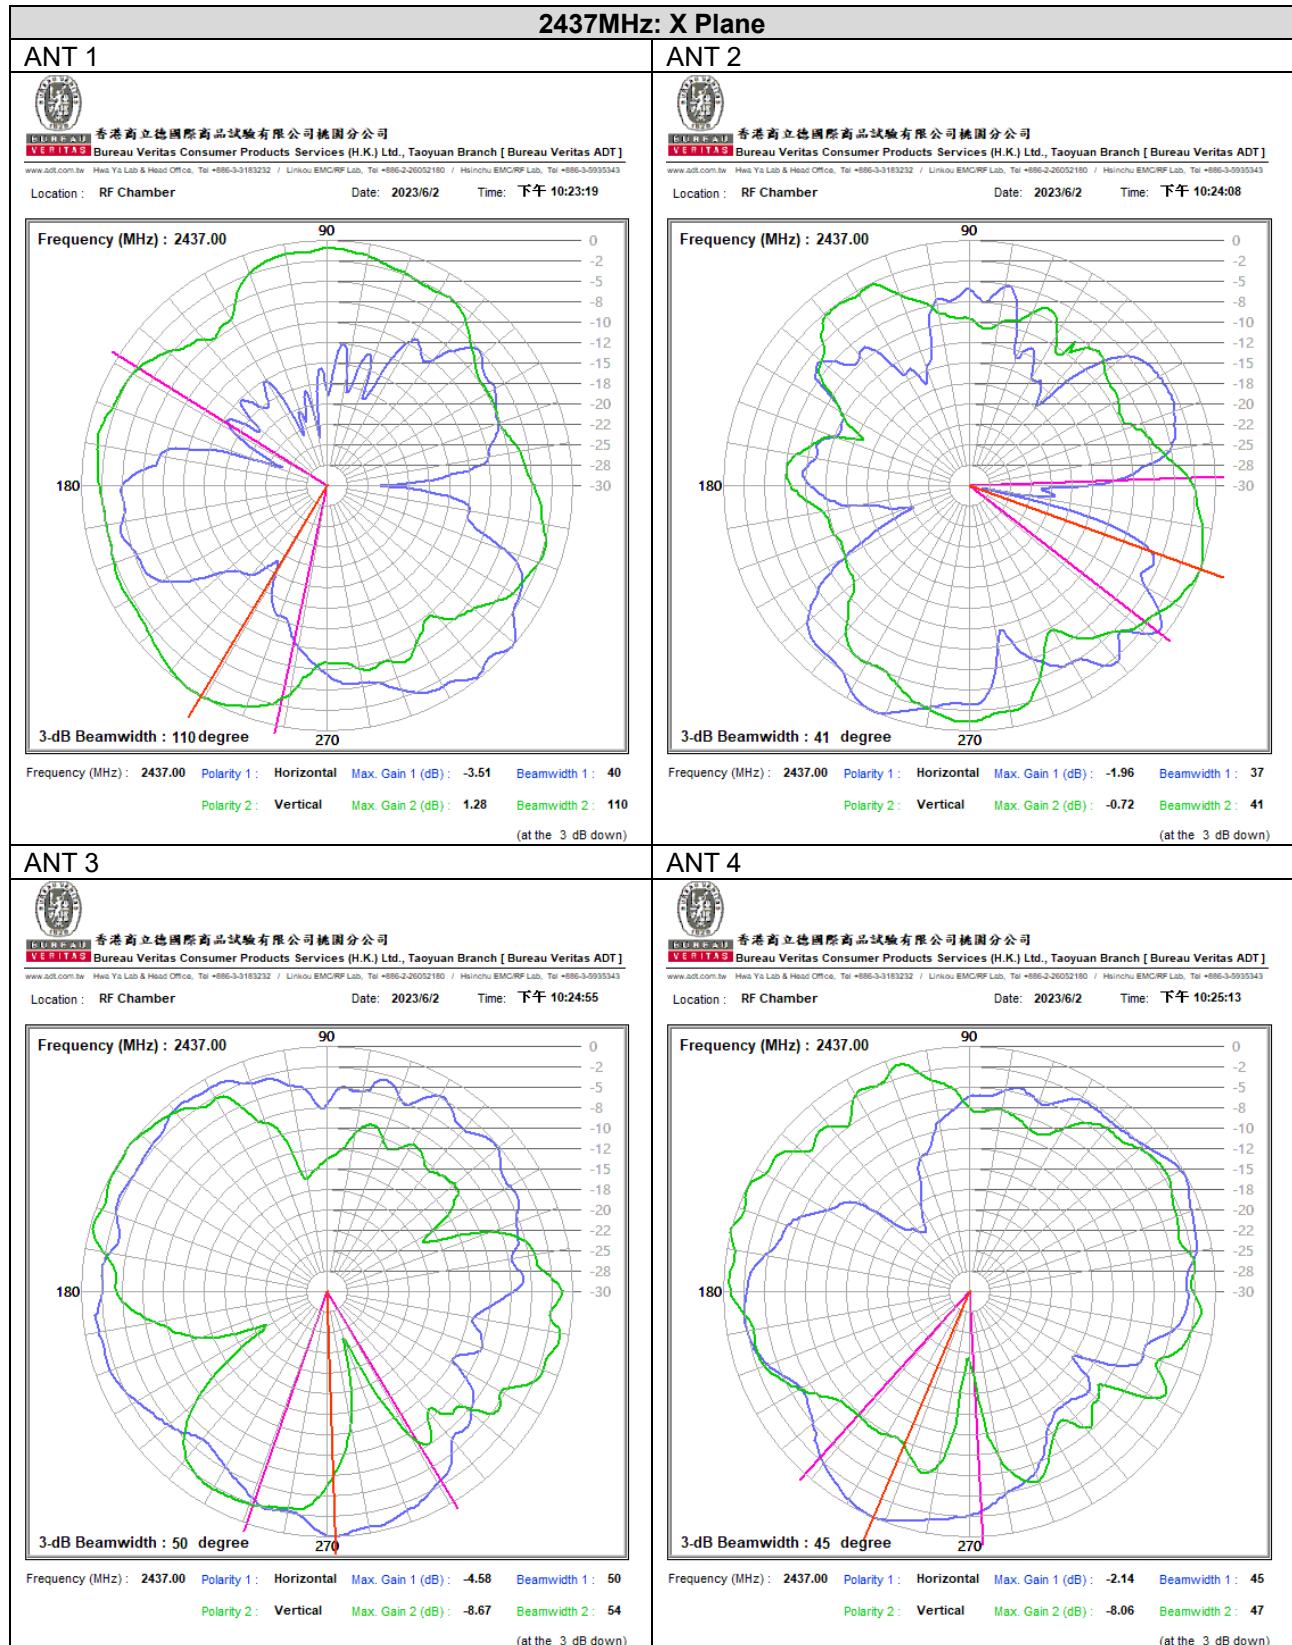

5180MHz: X Plane

ANT 1




香港高立德國際商品試驗有限公司桃園分公司
Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch [Bureau Veritas ADT]
www.adt.com.tw Hwa Yu Lab & Head Office, Tel: +886-3-3183232 / Linkou EMC/RF Lab, Tel: +886-3-26052180 / Hsinchu EMC/RF Lab, Tel: +886-3-5935343

Location: RF Chamber

Date: 2023/6/2

Time: 下午 08:31:21

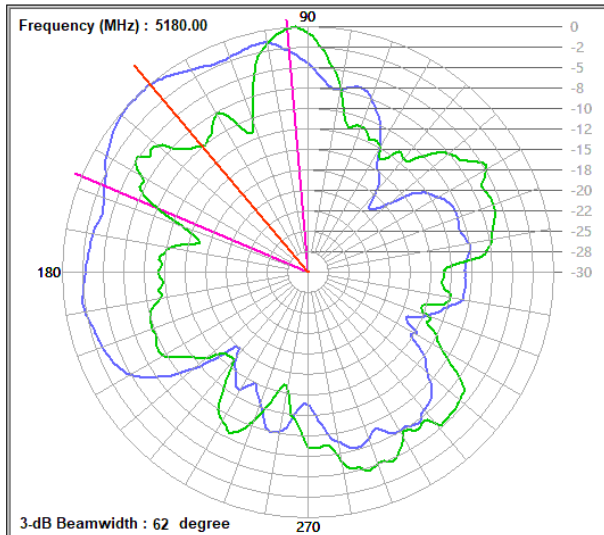

Frequency (MHz): 5180.00 Polarity 1: Horizontal Max. Gain 1 (dB): 1.51 Beamwidth 1: 62
Polarity 2: Vertical Max. Gain 2 (dB): -8.68 Beamwidth 2: 18
(at the 3 dB down)

ANT 2




香港高立德國際商品試驗有限公司桃園分公司
Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch [Bureau Veritas ADT]
www.adt.com.tw Hwa Yu Lab & Head Office, Tel: +886-3-3183232 / Linkou EMC/RF Lab, Tel: +886-3-26052180 / Hsinchu EMC/RF Lab, Tel: +886-3-5935343

Location: RF Chamber

Date: 2023/6/2

Time: 下午 09:06:50

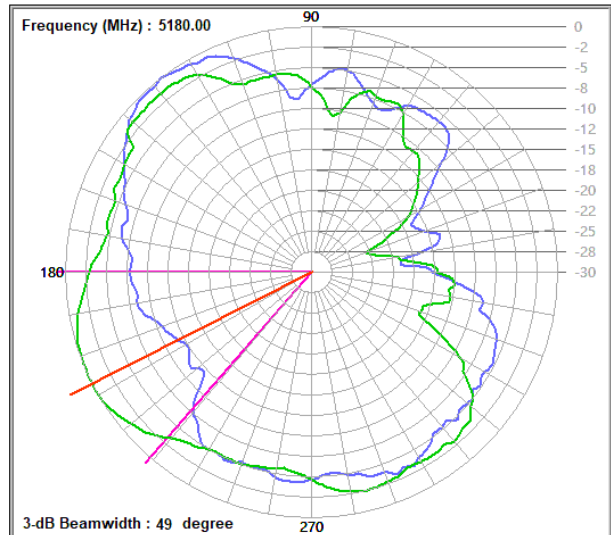

Frequency (MHz): 5180.00 Polarity 1: Horizontal Max. Gain 1 (dB): -4.70 Beamwidth 1: 40
Polarity 2: Vertical Max. Gain 2 (dB): -0.18 Beamwidth 2: 49
(at the 3 dB down)

ANT 3




香港高立德國際商品試驗有限公司桃園分公司
Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch [Bureau Veritas ADT]
www.adt.com.tw Hwa Yu Lab & Head Office, Tel: +886-3-3183232 / Linkou EMC/RF Lab, Tel: +886-3-26052180 / Hsinchu EMC/RF Lab, Tel: +886-3-5935343

Location: RF Chamber

Date: 2023/6/2

Time: 下午 09:12:41

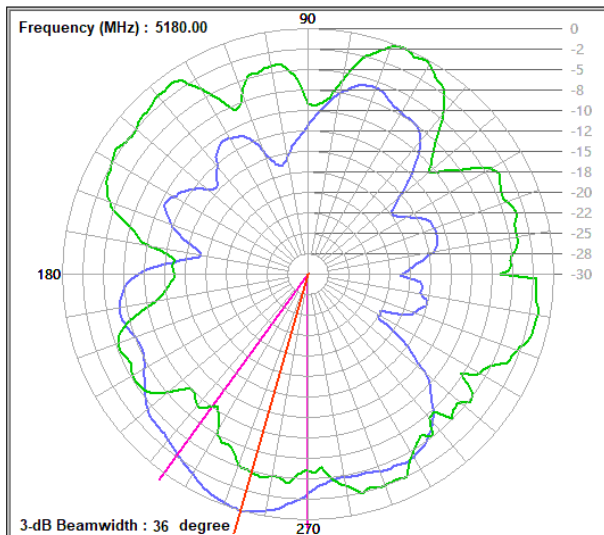

Frequency (MHz): 5180.00 Polarity 1: Horizontal Max. Gain 1 (dB): 0.73 Beamwidth 1: 36
Polarity 2: Vertical Max. Gain 2 (dB): -11.10 Beamwidth 2: 25
(at the 3 dB down)

ANT 4




香港高立德國際商品試驗有限公司桃園分公司
Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch [Bureau Veritas ADT]
www.adt.com.tw Hwa Yu Lab & Head Office, Tel: +886-3-3183232 / Linkou EMC/RF Lab, Tel: +886-3-26052180 / Hsinchu EMC/RF Lab, Tel: +886-3-5935343

Location: RF Chamber

Date: 2023/6/2

Time: 下午 09:18:07

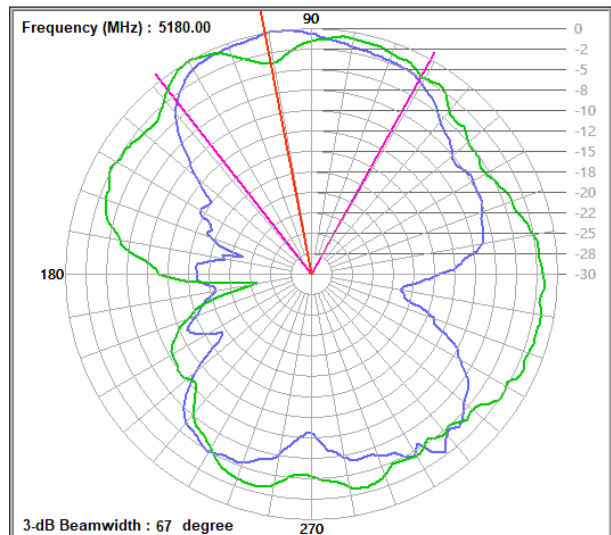

Frequency (MHz): 5180.00 Polarity 1: Horizontal Max. Gain 1 (dB): -0.12 Beamwidth 1: 67
Polarity 2: Vertical Max. Gain 2 (dB): -1.49 Beamwidth 2: 28
(at the 3 dB down)


5320MHz: X Plane

ANT 1



香港商立德國際商品試驗有限公司桃園分公司
Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch [Bureau Veritas ADT]
www.adt.com.tw Hwa Yu Lab & Head Office, Tel: +886-3-3183232 / Linkou EMC/RF Lab, Tel: +886-2-26052180 / Hsinchu EMC/RF Lab, Tel: +886-3-5935343

Location: RF Chamber Date: 2023/6/6 Time: 上午 11:01:26

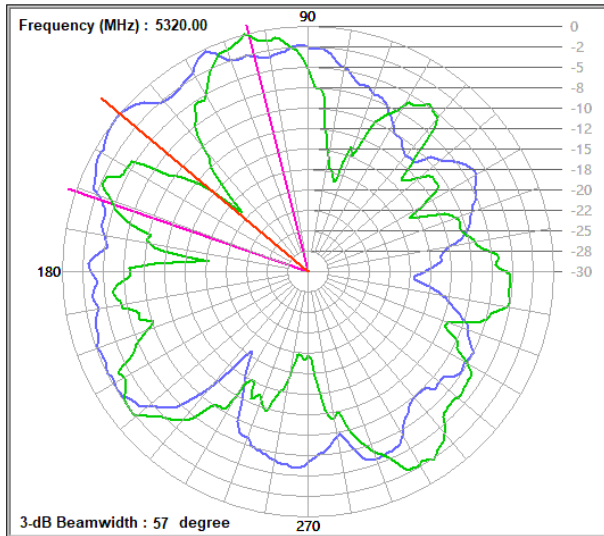


Frequency (MHz): 5320.00 Polarity 1: Horizontal Max. Gain 1 (dB): 1.03 Beamwidth 1: 57
Polarity 2: Vertical Max. Gain 2 (dB): -6.68 Beamwidth 2: 24
(at the 3 dB down)

ANT 2



香港商立德國際商品試驗有限公司桃園分公司
Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch [Bureau Veritas ADT]
www.adt.com.tw Hwa Yu Lab & Head Office, Tel: +886-3-3183232 / Linkou EMC/RF Lab, Tel: +886-2-26052180 / Hsinchu EMC/RF Lab, Tel: +886-3-5935343

Location: RF Chamber Date: 2023/6/6 Time: 上午 11:00:51

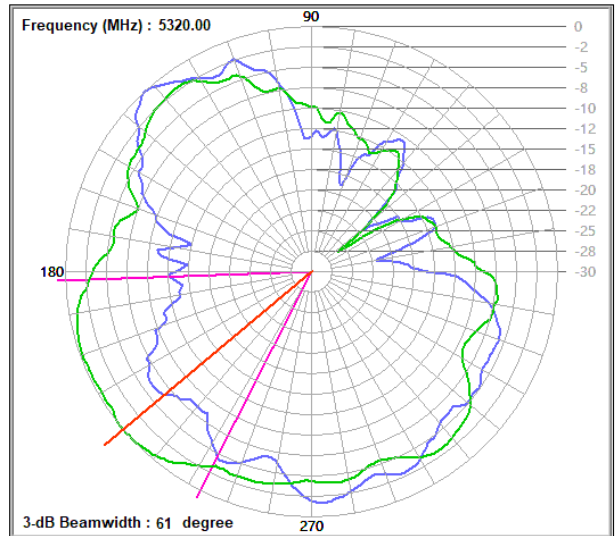


Frequency (MHz): 5320.00 Polarity 1: Horizontal Max. Gain 1 (dB): -3.50 Beamwidth 1: 22
Polarity 2: Vertical Max. Gain 2 (dB): 1.28 Beamwidth 2: 61
(at the 3 dB down)

ANT 3



香港商立德國際商品試驗有限公司桃園分公司
Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch [Bureau Veritas ADT]
www.adt.com.tw Hwa Yu Lab & Head Office, Tel: +886-3-3183232 / Linkou EMC/RF Lab, Tel: +886-2-26052180 / Hsinchu EMC/RF Lab, Tel: +886-3-5935343

Location: RF Chamber Date: 2023/6/6 Time: 上午 11:18:54

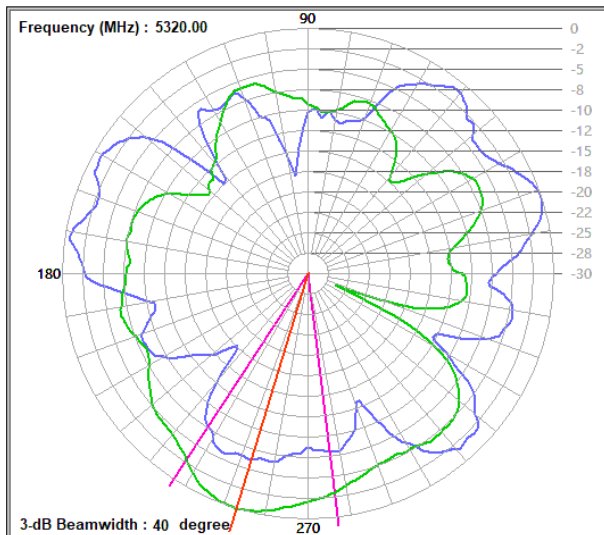


Frequency (MHz): 5320.00 Polarity 1: Vertical Max. Gain 1 (dB): -8.54 Beamwidth 1: 21
Polarity 2: Horizontal Max. Gain 2 (dB): 2.03 Beamwidth 2: 40
(at the 3 dB down)

ANT 4



香港商立德國際商品試驗有限公司桃園分公司
Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch [Bureau Veritas ADT]
www.adt.com.tw Hwa Yu Lab & Head Office, Tel: +886-3-3183232 / Linkou EMC/RF Lab, Tel: +886-2-26052180 / Hsinchu EMC/RF Lab, Tel: +886-3-5935343

Location: RF Chamber Date: 2023/6/6 Time: 上午 11:26:50

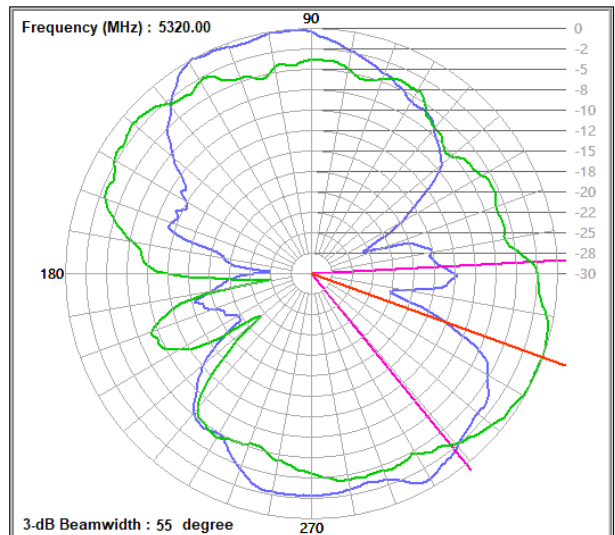

Frequency (MHz): 5320.00 Polarity 1: Horizontal Max. Gain 1 (dB): -0.20 Beamwidth 1: 54
Polarity 2: Vertical Max. Gain 2 (dB): 0.09 Beamwidth 2: 55
(at the 3 dB down)


5500MHz: X Plane

ANT 1



香港商立德國際商品試驗有限公司桃園分公司
Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch [Bureau Veritas ADT]
www.adt.com.tw Hwa Yu Lab & Head Office, Tel: +886-3-3183232 / Linkou EMC/RF Lab, Tel: +886-2-26052180 / Hsinchu EMC/RF Lab, Tel: +886-3-5935343

Location: RF Chamber Date: 2023/6/6 Time: 下午 01:20:24

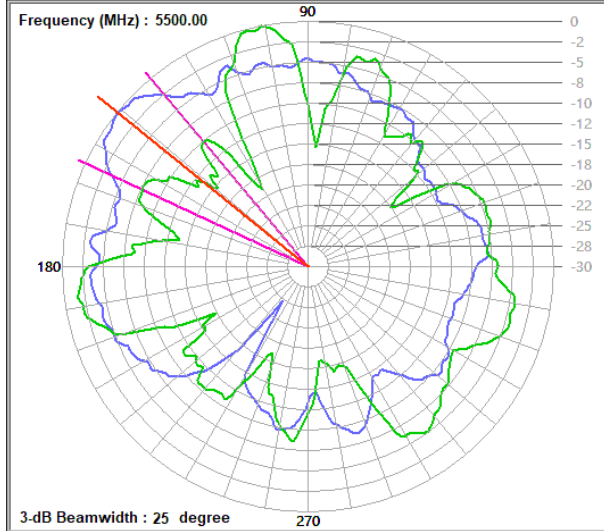


Frequency (MHz): 5500.00 Polarity 1: Horizontal Max. Gain 1 (dB): 2.62 Beamwidth 1: 25
Polarity 2: Vertical Max. Gain 2 (dB): -5.99 Beamwidth 2: 16
(at the 3 dB down)

ANT 2



香港商立德國際商品試驗有限公司桃園分公司
Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch [Bureau Veritas ADT]
www.adt.com.tw Hwa Yu Lab & Head Office, Tel: +886-3-3183232 / Linkou EMC/RF Lab, Tel: +886-2-26052180 / Hsinchu EMC/RF Lab, Tel: +886-3-5935343

Location: RF Chamber Date: 2023/6/6 Time: 下午 01:09:24

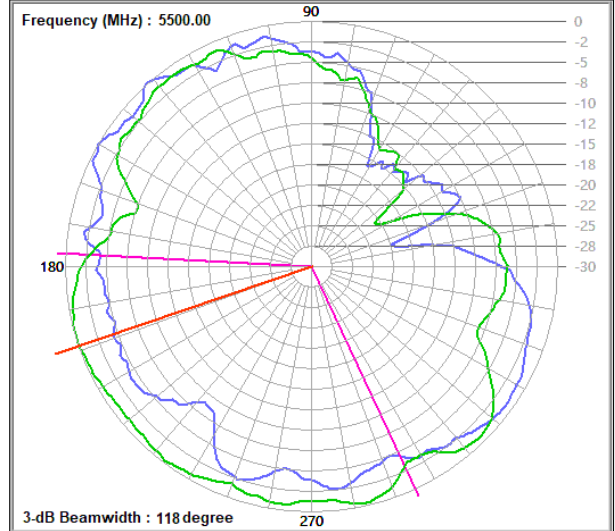


Frequency (MHz): 5500.00 Polarity 1: Horizontal Max. Gain 1 (dB): -4.15 Beamwidth 1: 46
Polarity 2: Vertical Max. Gain 2 (dB): -0.26 Beamwidth 2: 118
(at the 3 dB down)

ANT 3



香港商立德國際商品試驗有限公司桃園分公司
Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch [Bureau Veritas ADT]
www.adt.com.tw Hwa Yu Lab & Head Office, Tel: +886-3-3183232 / Linkou EMC/RF Lab, Tel: +886-2-26052180 / Hsinchu EMC/RF Lab, Tel: +886-3-5935343

Location: RF Chamber Date: 2023/6/6 Time: 下午 01:01:13

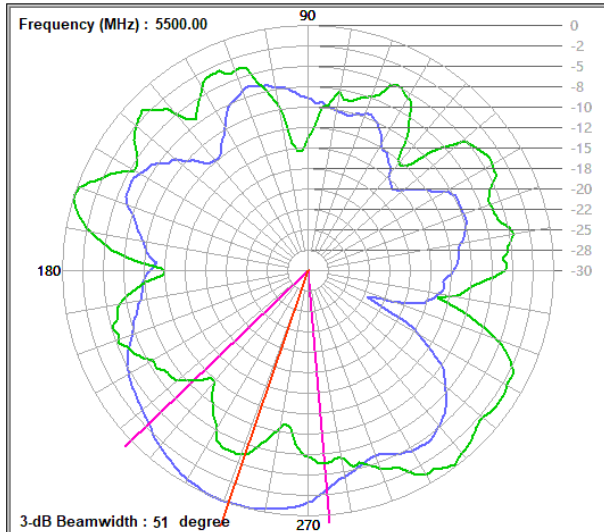


Frequency (MHz): 5500.00 Polarity 1: Horizontal Max. Gain 1 (dB): 2.19 Beamwidth 1: 51
Polarity 2: Vertical Max. Gain 2 (dB): -9.46 Beamwidth 2: 15
(at the 3 dB down)

ANT 4



香港商立德國際商品試驗有限公司桃園分公司
Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch [Bureau Veritas ADT]
www.adt.com.tw Hwa Yu Lab & Head Office, Tel: +886-3-3183232 / Linkou EMC/RF Lab, Tel: +886-2-26052180 / Hsinchu EMC/RF Lab, Tel: +886-3-5935343

Location: RF Chamber Date: 2023/6/6 Time: 上午 11:39:35

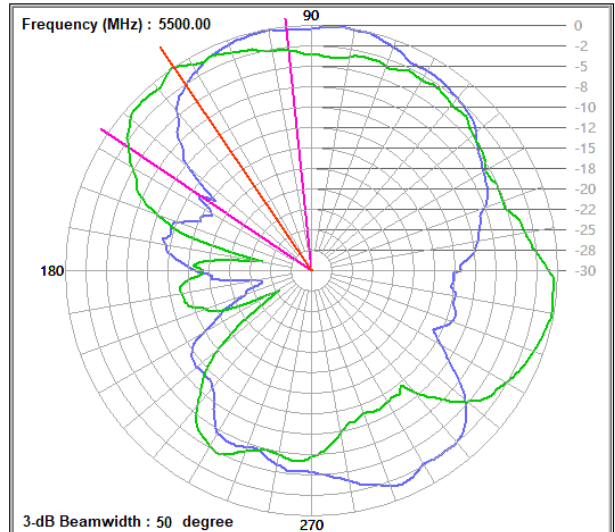

Frequency (MHz): 5500.00 Polarity 1: Horizontal Max. Gain 1 (dB): -0.06 Beamwidth 1: 82
Polarity 2: Vertical Max. Gain 2 (dB): 0.73 Beamwidth 2: 50
(at the 3 dB down)


5785MHz: X Plane

ANT 1



香港商立德國際商品試驗有限公司桃園分公司
Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch [Bureau Veritas ADT]
www.adt.com.tw Hwa Yu Lab & Head Office, Tel: +886-3-3183232 / Linkou EMC/RF Lab, Tel: +886-2-26052180 / Hsinchu EMC/RF Lab, Tel: +886-3-5935343

Location: RF Chamber Date: 2023/6/6 Time: 下午 01:33:06

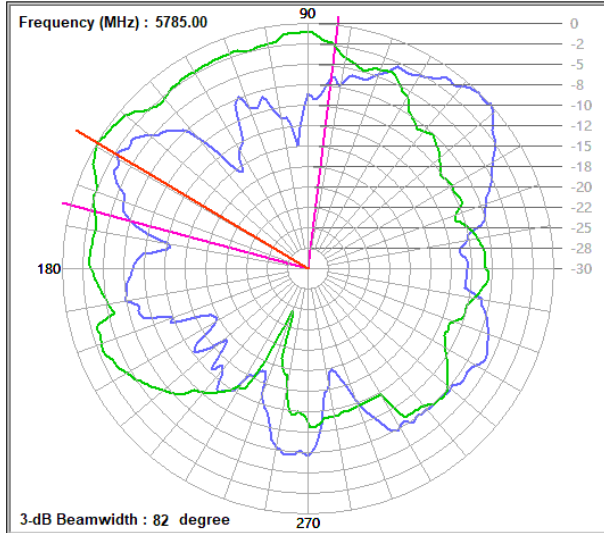


Frequency (MHz): 5785.00 Polarity 1: Vertical Max. Gain 1 (dB): -7.27 Beamwidth 1: 29
Polarity 2: Horizontal Max. Gain 2 (dB): 0.47 Beamwidth 2: 82
(at the 3 dB down)

ANT 2



香港商立德國際商品試驗有限公司桃園分公司
Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch [Bureau Veritas ADT]
www.adt.com.tw Hwa Yu Lab & Head Office, Tel: +886-3-3183232 / Linkou EMC/RF Lab, Tel: +886-2-26052180 / Hsinchu EMC/RF Lab, Tel: +886-3-5935343

Location: RF Chamber Date: 2023/6/6 Time: 下午 01:51:55

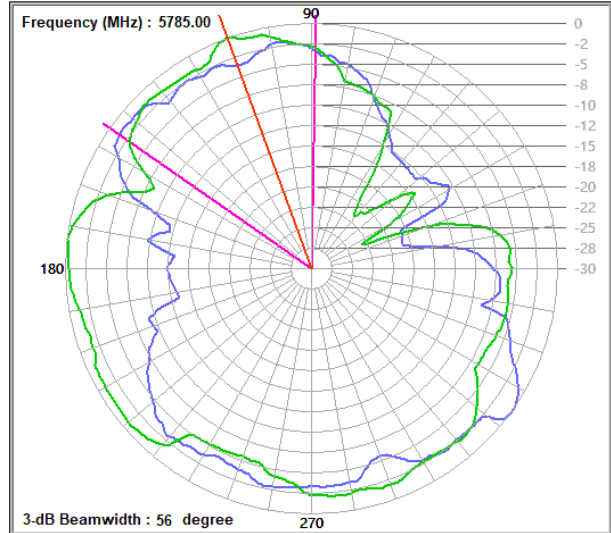


Frequency (MHz): 5785.00 Polarity 1: Horizontal Max. Gain 1 (dB): -2.40 Beamwidth 1: 37
Polarity 2: Vertical Max. Gain 2 (dB): -0.29 Beamwidth 2: 56
(at the 3 dB down)

ANT 3



香港商立德國際商品試驗有限公司桃園分公司
Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch [Bureau Veritas ADT]
www.adt.com.tw Hwa Yu Lab & Head Office, Tel: +886-3-3183232 / Linkou EMC/RF Lab, Tel: +886-2-26052180 / Hsinchu EMC/RF Lab, Tel: +886-3-5935343

Location: RF Chamber Date: 2023/6/6 Time: 下午 01:57:19

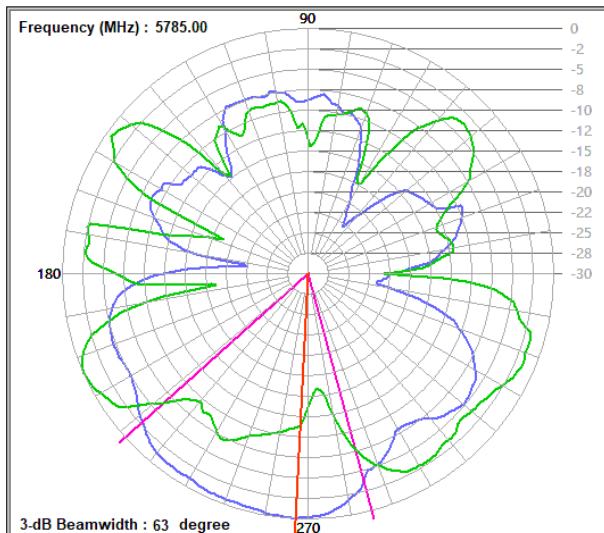


Frequency (MHz): 5785.00 Polarity 1: Horizontal Max. Gain 1 (dB): 2.81 Beamwidth 1: 63
Polarity 2: Vertical Max. Gain 2 (dB): -4.00 Beamwidth 2: 22
(at the 3 dB down)

ANT 4



香港商立德國際商品試驗有限公司桃園分公司
Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch [Bureau Veritas ADT]
www.adt.com.tw Hwa Yu Lab & Head Office, Tel: +886-3-3183232 / Linkou EMC/RF Lab, Tel: +886-2-26052180 / Hsinchu EMC/RF Lab, Tel: +886-3-5935343

Location: RF Chamber Date: 2023/6/6 Time: 下午 02:08:31

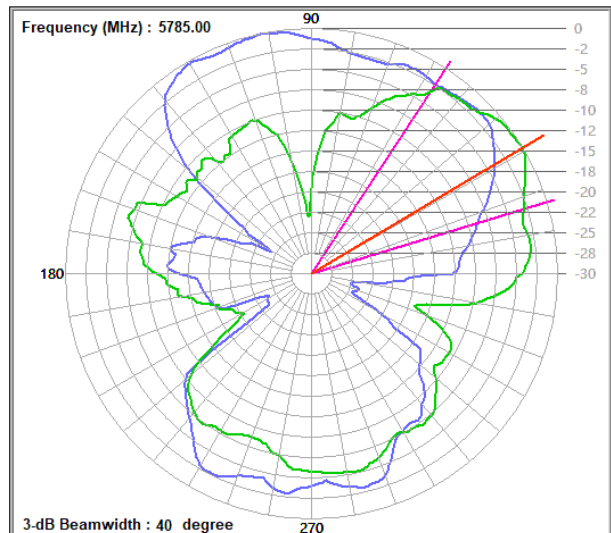

Frequency (MHz): 5785.00 Polarity 1: Horizontal Max. Gain 1 (dB): 0.26 Beamwidth 1: 97
Polarity 2: Vertical Max. Gain 2 (dB): 0.47 Beamwidth 2: 40
(at the 3 dB down)

3 Appendix - Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---