

1 MAXIMUM PERMISSIBLE EXPOSURE (MPE)

1.1 Standard Applicable

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

This is a Mobile device, the MPE is required.

According to §1.1310 and §2.1093 RF exposure is calculated.

Limits for Maximum Permissive Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	F/1500	30
1500-15000	/	/	1.0	30

F = frequency in MHz

* = Plane-wave equipment power density

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com

Member of SGS Group

1.2 Maximum Permissible Exposure (MPE) Evaluation

Internal Antenna

802.11b Power Table

Frequency (MHz)	Reading Power (dBm)
2412.00	19.10
2437.00	19.63
2462.00	19.92

MPE Prediction (802.11b)

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG / 4 \pi R^2$$

Where: S = Power density

P = Power input to antenna

G = Power gain of the antenna in the direction of interest relative to an isotropic radiator

R = Distance to the center of radiation of the antenna

Maximum average output power at antenna input	19.92	(dBm)
Maximum average output power at antenna input	98.1747943	(mW)
Duty cycle:	99	(%)
Maximum Pav :	97.1930464	(mW)
Antenna gain (typical):	4.25	(dBi)
Maximum antenna gain:	2.66072506	(numeric)
Prediction distance:	20	(cm)
Prediction frequency:	2462	(MHz)
MPE limit for uncontrolled exposure at prediction	1	(mW/cm ²)
Power density at predication frequency at 20 (cm)	0.051474	(mW/cm ²)

Measurement Result

The predicted power density level at 20 cm is 0.051474 mW/cm². This is below the uncontrolled exposure limit of 1 mW/cm² at 2462MHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com

Member of SGS Group

802.11g Power Table

Frequency (MHz)	Reading Power (dBm)
2412.00	14.35
2437.00	14.38
2462.00	14.22

MPE Prediction (802.11g)

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG / 4 \pi R^2$$

Where: S = Power density

P = Power input to antenna

G = Power gain of the antenna in the direction of interest relative to an isotropic radiator

R = Distance to the center of radiation of the antenna

Maximum average output power at antenna input	14.38	(dBm)
Maximum average output power at antenna input	27.4157417	(mW)
Duty cycle:	98	(%)
Maximum Pav :	26.8674269	(mW)
Antenna gain (typical):	4.25	(dBi)
Maximum antenna gain:	2.66072506	(numeric)
Prediction distance:	20	(cm)
Prediction frequency:	2437	(MHz)
MPE limit for uncontrolled exposure at prediction	1	(mW/cm ²)
Power density at predication frequency at 20 (cm)	0.014229	(mW/cm ²)

Measurement Result

The predicted power density level at 20 cm is 0.014229 mW/cm². This is below the uncontrolled exposure limit of 1 mW/cm² at 2437.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com

Member of SGS Group

802.11n_20M (2.4G) MIMO Chain 0+Chain 1 Power Table

Frequency (MHz)	Reading Power (dBm)
2412.00	15.01
2437.00	16.22
2462.00	16.42

MPE Prediction (802.11n_20M (2.4G))

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG / 4 \pi R^2$$

Where: S = Power density

P = Power input to antenna

G = Power gain of the antenna in the direction of interest relative to an isotropic radiator

R = Distance to the center of radiation of the antenna

Maximum average output power at antenna input	16.42	(dBm)
Maximum average output power at antenna input	43.8530698	(mW)
Duty cycle:	97	(%)
Maximum Pav :	42.5374777	(mW)
Antenna gain (typical):	7.26	(dBi)
Maximum antenna gain:	5.32108259	(numeric)
Prediction distance:	20	(cm)
Prediction frequency:	2462	(MHz)
MPE limit for uncontrolled exposure at prediction	1	(mW/cm ²)
Power density at predication frequency at 20 (cm)	0.045053	(mW/cm ²)

Measurement Result

The predicted power density level at 20 cm is 0.045053 mW/cm². This is below the uncontrolled exposure limit of 1 mW/cm² at 2462.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com

Member of SGS Group

802.11n_40M (2.4G) MIMO Chain 0+Chain 1Power Table

Frequency (MHz)	Reading Power (dBm)
2422.00	14.15
2437.00	15.21
2452.00	14.54

MPE Prediction (802.11n_40M (2.4G))

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG / 4 \pi R^2$$

Where: S = Power density

P = Power input to antenna

G = Power gain of the antenna in the direction of interest relative to an isotropic radiator

R = Distance to the center of radiation of the antenna

Maximum average output power at antenna input	15.21	(dBm)
Maximum average output power at antenna input	33.1894458	(mW)
Duty cycle:	93	(%)
Maximum Pav :	30.8661846	(mW)
Antenna gain (typical):	7.26	(dBi)
Maximum antenna gain:	5.32108259	(numeric)
Prediction distance:	20	(cm)
Prediction frequency:	2437	(MHz)
MPE limit for uncontrolled exposure at prediction	1	(mW/cm ²)
Power density at predication frequency at 20 (cm)	0.032691	(mW/cm ²)

Measurement Result

The predicted power density level at 20 cm is 0.032691 mW/cm². This is below the uncontrolled exposure limit of 1 mW/cm² at 2437.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488


www.tw.sgs.com

Member of SGS Group

Collocated MPE analysis:

As per KDB447498 D01, if the radio application is composed of the multiple transmitters confining in the host platform, and placing nearby, the simultaneous transmission due to impact of accumulation of individual MPE shall be evaluated if or not given application could conditionally qualify for MPE test exclusion.

Location of the transmitting antennas where they distribute:

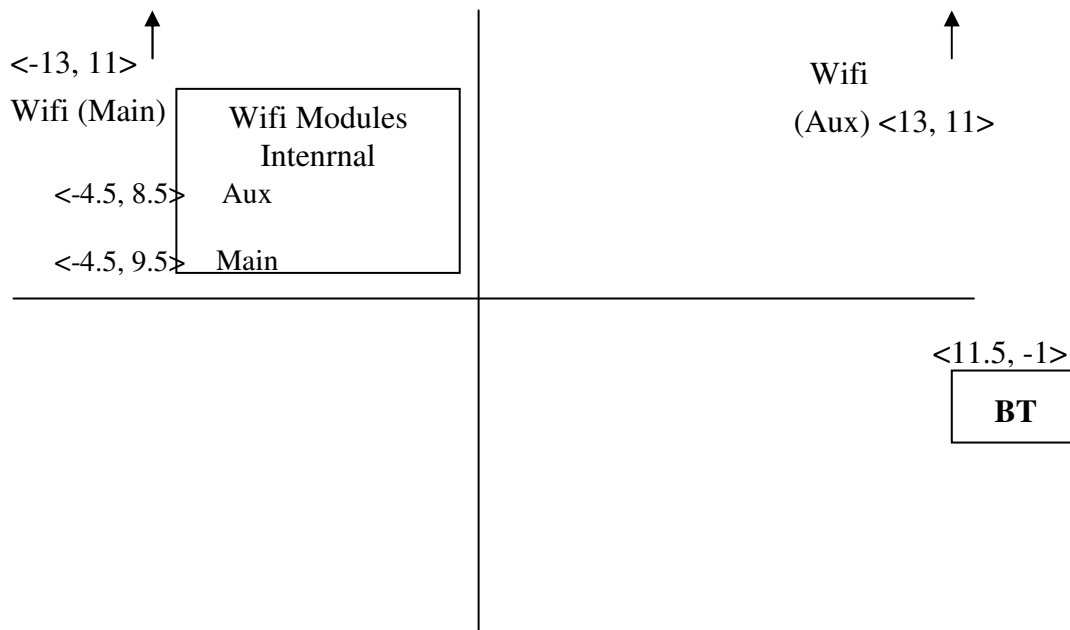

Scenario of operation when simultaneous transmission occurs:

Scenario 1:

External Antenna:

Wifi b or g + Bluetooth

Scenario 2:

External Antenna:

Wifi n_MIMO + Bluetooth

Scenario 3:

External Antenna:

Wifi a + Bluetooth

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Scenario 4:

External Antenna:

Wifi n_5G (MIMO) + Bluetooth

Scenario 5:

Internal Antenna:

Wifi b or g + Bluetooth

Scenario 6:

Internal Antenna:

Wifi n_MIMO + Bluetooth

Scenario 7:

Internal Antenna:

Wifi a + Bluetooth

Scenario 8:

Internal Antenna:

Wifi n 5G_MIMO + Bluetooth

Scenario 9:

External Antenna:

Wifi b or g + Bluetooth LE

Scenario 10:

External Antenna:

Wifi n_MIMO + Bluetooth LE

Scenario 11:

External Antenna:

Wifi a + Bluetooth LE

Scenario 12:

External Antenna:

Wifi n_5G (MIMO) + Bluetooth LE

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com

Member of SGS Group

Scenario 13:

Internal Antenna:

Wifi b or g + Bluetooth LE

Scenario 14:

Internal Antenna:

Wifi n_MIMO + Bluetooth LE

Scenario 15:

Internal Antenna:

Wifi a + Bluetooth LE

Scenario 16:

Internal Antenna:

Wifi n 5G_MIMO + Bluetooth LE

Exclusion of test condition:

Simultaneous transmission MPE test exclusion applies when the sum of the MPE ratios for all simultaneous transmitting antennas incorporated in a host device, based on calculated or measured field strengths or power density, is ≤ 1.0 .

$$\sum MPE\ ratio1 + MPE\ ratio2 + MPE\ ratio3 \leq 1.0$$

The spreadsheet as FCC deduces, and releases is employed to conduct the measurement:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com

Member of SGS Group

Scenario 1:

External Antenna:

Wifi b or g + Bluetooth

Antenna No.		Total	1	2
Tx Status			On	On
Frequency	MHz		2462	2441
MPE Limit	mW/cm ²		1.00	1.00
Max % MPE	%	3.2	3.2	0.0
Power	(W)	0.099	0.098	0.001
Antenna Gain	dBi		2.10	0.5
EIRP	(W)	0.16	0.159	0.001
X	(cm)		-13.0	11.5
Y	(cm)		11.0	-1.0
Sector			FALSE	FALSE
Arc			FALSE	FALSE
θ_1	degs	input	-120	-120
θ_2			60	60
θ_1		actual	-120	-120
θ_2			60	60

MPE = 3.2/100 = 0.032 < 1.0, and therefore maximum MPE generated from individual transmitter can be excluded.

Scenario 2:

External Antenna:

Wifi n_MIMO + Bluetooth

Antenna No.		Total	1	2	3
Tx Status			On	On	On
Frequency	MHz		2462	2441	2462
MPE Limit	mW/cm ²		1.00	1.00	1.00
Max % MPE	%	1.3	0.6	0.0	0.7
Power	(W)	0.044	0.020	0.001	0.023
Antenna Gain	dBi		2.10	0.5	2.10
EIRP	(W)	0.07	0.032	0.001	0.037
X	(cm)		-13.0	11.5	13.0
Y	(cm)		11.0	-1.0	11
Sector			FALSE	FALSE	FALSE
Arc			FALSE	FALSE	FALSE
θ_1	degs	input	-120	-120	-120
θ_2			60	60	60
θ_1		actual	-120	-120	-120
θ_2			60	60	60

MPE = 1.3/100 = 0.013 < 1.0, and therefore maximum MPE generated from individual transmitter can be excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com

Member of SGS Group

Scenario 3:

External Antenna:
Wifi a + Bluetooth

Antenna No.		Total	1	2
Tx Status			On	On
Frequency	MHz		5500	2441
MPE Limit	mW/cm ²		1.00	1.00
Max % MPE	%	2.2	2.1	0.0
Power	(W)	0.058	0.034	0.001
Antenna Gain	dBi		5.00	0.5
EIRP	(W)	0.11	0.108	0.001
X	(cm)		-13.0	11.5
Y	(cm)		11.0	-1.0
Sector			FALSE	FALSE
Arc			FALSE	FALSE
θ_1	degs	input	-120	-120
θ_2			60	60
θ_1		actual	-120	-120
θ_2			60	60

$MPE = 2.2/100 = 0.022 < 1.0$, and therefore maximum MPE generated from individual transmitter can be excluded.

Scenario 4:

External Antenna:
Wifi n_MIMO 5G + Bluetooth

Antenna No.		Total	1	2	3
Tx Status			On	On	On
Frequency	MHz		5500	2441	5500
MPE Limit	mW/cm ²		1.00	1.00	1.00
Max % MPE	%	4.4	2.1	0.0	2.5
Power	(W)	0.074	0.033	0.001	0.040
Antenna Gain	dBi		5.00	0.5	5.00
EIRP	(W)	0.23	0.104	0.001	0.126
X	(cm)		-13.0	11.5	13.0
Y	(cm)		11.0	-1.0	11.0
Sector			FALSE	FALSE	FALSE
Arc			FALSE	FALSE	FALSE
θ_1	degs	input	-120	-120	-120
θ_2			60	60	60
θ_1		actual	-120	-120	-120
θ_2			60	60	60

$MPE = 4.4/100 = 0.044 < 1.0$, and therefore maximum MPE generated from individual transmitter can be excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com

Member of SGS Group

Scenario 5:

Internal Antenna:

Wifi b or g + Bluetooth

Antenna No.		Total	1	2
Tx Status			On	On
Frequency	MHz		2462	2441
MPE Limit	mW/cm ²		1.00	1.00
Max % MPE	%	5.2	5.2	0.0
Power	(W)	0.099	0.098	0.001
Antenna Gain	dBi		4.25	0.5
EIRP	(W)	0.26	0.036	0.001
X	(cm)		-4.5	11.5
Y	(cm)		9.5	-1.0
Sector			FALSE	FALSE
Arc			FALSE	FALSE
θ_1	degs	input	-120	-120
θ_2			60	60
θ_1		actual	-120	-120
θ_2			60	60

$MPE = 5.2/100 = 0.052 < 1.0$, and therefore maximum MPE generated from individual transmitter can be excluded.

Scenario 6:

Internal Antenna:

Wifi n_MIMO + Bluetooth

Antenna No.		Total	1	2	3
Tx Status			On	On	On
Frequency	MHz		2462	2441	2462
MPE Limit	mW/cm ²		1.00	1.00	1.00
Max % MPE	%	2.3	1.1	0.0	1.2
Power	(W)	0.044	0.020	0.001	0.023
Antenna Gain	dBi		4.25	0.5	4.25
EIRP	(W)	0.12	0.053	0.001	0.061
X	(cm)		-4.5	11.5	-4.5
Y	(cm)		9.5	-1.0	8.5
Sector			FALSE	FALSE	FALSE
Arc			FALSE	FALSE	FALSE
θ_1	degs	input	-120	-120	-120
θ_2			60	60	60
θ_1		actual	-120	-120	-120
θ_2			60	60	60

$MPE = 2.3/100 = 0.023 < 1.0$, and therefore maximum MPE generated from individual transmitter can be excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Scenario 7:

Internal Antenna:
Wifi a + Bluetooth

Antenna No.		Total	1	2
Tx Status			On	On
Frequency	MHz		5500	2441
MPE Limit	mW/cm ²		1.00	1.00
Max % MPE	%	2.2	2.4	0.0
Power	(W)	0.035	0.034	0.001
Antenna Gain	dBi		5.00	0.5
EIRP	(W)	0.11	0.121	0.001
X	(cm)		-4.5	11.5
Y	(cm)		9.5	-1.0
Sector			FALSE	FALSE
Arc			FALSE	FALSE
θ_1	degs	input	-120	-120
θ_2			60	60
θ_1		actual	-120	-120
θ_2			60	60

$MPE = 2.2 / 100 = 0.022 < 1.0$, and therefore maximum MPE generated from individual transmitter can be excluded.

Scenario 8:

Internal Antenna:
Wifi n_5G_MIMO + Bluetooth

Antenna No.		Total	1	2	3
Tx Status			On	On	On
Frequency	MHz		5500	2441	5500
MPE Limit	mW/cm ²		1.00	1.00	1.00
Max % MPE	%	5.2	2.4	0.0	2.8
Power	(W)	0.075	0.034	0.001	0.040
Antenna Gain	dBi		5.50	0.5	5.50
EIRP	(W)	0.26	0.121	0.001	0.142
X	(cm)		-4.5	11.5	-4.5
Y	(cm)		9.5	-1.0	8.5
Sector			FALSE	FALSE	FALSE
Arc			FALSE	FALSE	FALSE
θ_1	degs	input	-120	-120	-120
θ_2			60	60	60
θ_1		actual	-120	-120	-120
θ_2			60	60	60

$MPE = 5.2/100 = 0.052 < 1.0$, and therefore maximum MPE generated from individual transmitter can be excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Scenario 9:

External Antenna:

Wifi b or g + Bluetooth LE

Antenna No.		Total	1	2
Tx Status			On	On
Frequency	MHz		2462	2402
MPE Limit	mW/cm ²		1.00	1.00
Max % MPE	%	3.2	3.2	0.0
Power	(W)	0.099	0.098	0.001
Antenna Gain	dBi		2.10	0.50
EIRP	(W)	0.30	0.048	0.001
X	(cm)		-13.0	11.5
Y	(cm)		11.0	-1.0
Sector			FALSE	FALSE
Arc			FALSE	FALSE
θ_1	degs	input	-120	-120
θ_2			60	60
θ_1		actual	-120	-120
θ_2			60	60

MPE = 3.2/100 = 0.032 < 1.0, and therefore maximum MPE generated from individual transmitter can be excluded.

Scenario 10:

External Antenna:

Wifi n_MIMO + Bluetooth LE

Antenna No.		Total	1	2	3
Tx Status			On	On	On
Frequency	MHz		2462	2402	2462
MPE Limit	mW/cm ²		1.00	1.00	1.00
Max % MPE	%	1.3	0.6	0.0	0.7
Power	(W)	0.044	0.020	0.001	0.023
Antenna Gain	dBi		2.10	0.50	2.10
EIRP	(W)	0.07	0.032	0.001	0.037
X	(cm)		-13.0	11.5	13.0
Y	(cm)		11.0	-1.0	11.0
Sector			FALSE	FALSE	FALSE
Arc			FALSE	FALSE	FALSE
θ_1	degs	input	-120	-120	-120
θ_2			60	60	60
θ_1		actual	-120	-120	-120
θ_2			60	60	60

MPE = 1.3/100 = 0.013 < 1.0, and therefore maximum MPE generated from individual transmitter can be excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com

Member of SGS Group

Scenario 11:

External Antenna:

Wifi a + Bluetooth LE

Antenna No.		Total	1	2
Tx Status			On	On
Frequency	MHz		5500	2402
MPE Limit	mW/cm ²		1.00	1.00
Max % MPE	%	2.2	2.1	0.0
Power	(W)	0.035	0.034	0.001
Antenna Gain	dBi		5.00	0.50
EIRP	(W)	0.11	0.108	0.001
X	(cm)		-13.0	11.5
Y	(cm)		11.0	-1.0
Sector			FALSE	FALSE
Arc			FALSE	FALSE
θ ₁	degs	input	-120	-120
θ ₂			60	60
θ ₁		actual	-120	-120
θ ₂			60	60

MPE = 2.2/100 = 0.022 < 1.0, and therefore maximum MPE generated from individual transmitter can be excluded.

Scenario 12:

External Antenna:

Wifi n_MIMO 5G + Bluetooth LE

Antenna No.		Total	1	2	3
Tx Status			On	On	On
Frequency	MHz		5500	2402	5500
MPE Limit	mW/cm ²		1.00	1.00	1.00
Max % MPE	%	4.4	2.1	0.0	2.5
Power	(W)	0.075	0.034	0.001	0.040
Antenna Gain	dBi		5.00	0.50	5.00
EIRP	(W)	0.24	0.108	0.001	0.142
X	(cm)		-13.0	11.5	13.0
Y	(cm)		11.0	-1.0	11.0
Sector			FALSE	FALSE	FALSE
Arc			FALSE	FALSE	FALSE
θ ₁	degs	input	-120	-120	-120
θ ₂			60	60	60
θ ₁		actual	-120	-120	-120
θ ₂			60	60	60

MPE = 4.4/100 = 0.044 < 1.0, and therefore maximum MPE generated from individual transmitter can be excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com

Member of SGS Group

Scenario 13:

Internal Antenna:

Wifi b or g + Bluetooth LE

Antenna No.		Total	1	2
Tx Status			On	On
Frequency	MHz		2462	2402
MPE Limit	mW/cm ²		1.00	1.00
Max % MPE	%	1.1	1.1	0.0
Power	(W)	0.021	0.020	0.001
Antenna Gain	dBi		4.25	0.50
EIRP	(W)	0.05	0.053	0.001
X	(cm)		-4.5	11.5
Y	(cm)		9.5	-1.0
Sector			FALSE	FALSE
Arc			FALSE	FALSE
θ_1	degs	input	-120	-120
θ_2			60	60
θ_1		actual	-120	-120
θ_2			60	60

MPE = 1.1/100 = 0.011 < 1.0, and therefore maximum MPE generated from individual transmitter can be excluded.

Scenario 14:

Internal Antenna:

Wifi n_MIMO + Bluetooth LE

Antenna No.		Total	1	2	3
Tx Status			On	On	On
Frequency	MHz		2462	2402	2462
MPE Limit	mW/cm ²		1.00	1.00	1.00
Max % MPE	%	1.8	1.1	0.0	1.2
Power	(W)	0.044	0.020	0.001	0.023
Antenna Gain	dBi		4.25	0.50	2.10
EIRP	(W)	0.09	0.053	0.001	0.061
X	(cm)		-4.5	11.5	-4.5
Y	(cm)		9.5	-1.0	8.5
Sector			FALSE	FALSE	FALSE
Arc			FALSE	FALSE	FALSE
θ_1	degs	input	-120	-120	-120
θ_2			60	60	60
θ_1		actual	-120	-120	-120
θ_2			60	60	60

MPE = 1.8/100 = 0.018 < 1.0, and therefore maximum MPE generated from individual transmitter can be excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com

Member of SGS Group

Scenario 15:

Internal Antenna:

Wifi a + Bluetooth LE

Antenna No.		Total	1	2
Tx Status			On	On
Frequency	MHz		5500	2402
MPE Limit	mW/cm ²		1.00	1.00
Max % MPE	%	2.4	2.4	0.0
Power	(W)	0.035	0.034	0.001
Antenna Gain	dBi		5.50	0.50
EIRP	(W)	0.12	0.121	0.001
X	(cm)		-4.5	11.5
Y	(cm)		9.5	-1.0
Sector			FALSE	FALSE
Arc			FALSE	FALSE
θ_1	degs	input	-120	-120
θ_2			60	60
θ_1		actual	-120	-120
θ_2			60	60

MPE = 2.4 / 100 = 0.024 < 1.0, and therefore maximum MPE generated from individual transmitter can be excluded.

Scenario 16:

Internal Antenna:

Wifi n_5G_MIMO + Bluetooth LE

Antenna No.		Total	1	2	3
Tx Status			On	On	On
Frequency	MHz		5500	2402	5500
MPE Limit	mW/cm ²		1.00	1.00	1.00
Max % MPE	%	5.2	2.4	0.0	2.8
Power	(W)	0.075	0.034	0.001	0.040
Antenna Gain	dBi		5.50	0.50	5.50
EIRP	(W)	0.26	0.121	0.001	0.142
X	(cm)		-4.5	11.5	-4.5
Y	(cm)		9.5	-1.0	8.5
Sector			FALSE	FALSE	FALSE
Arc			FALSE	FALSE	FALSE
θ_1	degs	input	-120	-120	-120
θ_2			60	60	60
θ_1		actual	-120	-120	-120
θ_2			60	60	60

MPE = 5.2/100 = 0.052 < 1.0, and therefore maximum MPE generated from individual transmitter can be excluded.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com

Member of SGS Group