


Co-location_US version

LTE_B25_1.4M_QPSK_CH26365+TX_ax20_5700MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B25_1.4M_QPSK_CH26365+TX_ax20_5700MHz
Test BY :Ashton

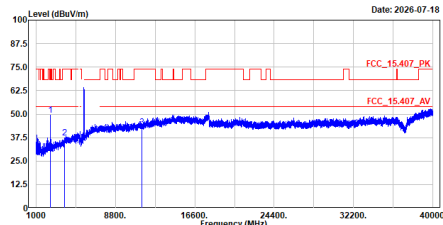


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2391.450	49.32	68.22	-18.90	73.19	-23.87	Peak
2	3765.000	37.18	74.00	-36.82	56.74	-19.56	Peak
3	11400.000	43.21	74.00	-30.79	45.78	-2.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B25_1.4M_QPSK_CH26365+TX_ax20_5700MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B25_1.4M_QPSK_CH26365+TX_ax20_5700MHz
Test BY :Ashton

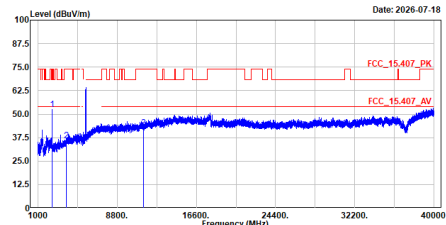


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2392.300	52.53	68.22	-15.69	76.39	-23.86	Peak
2	3765.000	35.67	74.00	-38.33	55.23	-19.56	Peak
3	11400.000	42.63	74.00	-31.37	45.20	-2.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz
Test BY :Ashton

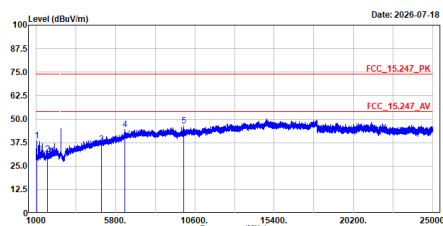


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1850.150	38.66	74.00	-35.34	64.61	-25.95	Peak
2	1683.000	31.39	74.00	-42.61	57.08	-25.69	Peak
3	4960.000	36.42	74.00	-37.58	50.98	-14.56	Peak
4	6357.550	44.46	74.00	-29.54	53.59	-9.13	Peak
5	9920.750	46.46	74.00	-27.54	52.53	-6.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz
Test BY :Ashton

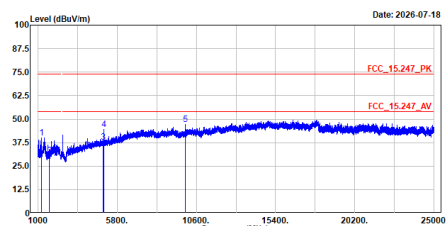


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1216.750	40.17	74.00	-33.83	66.02	-25.85	Peak
2	1683.000	30.49	74.00	-43.51	56.18	-25.69	Peak
3	4960.000	37.64	74.00	-36.36	52.20	-14.56	Peak
4	4981.400	44.61	74.00	-29.39	59.08	-14.47	Peak
5	9920.750	47.01	74.00	-26.99	53.08	-6.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_3M_QPSK_CH26775+TX_ax40_2452MHz_H

Site :HY-CB03
Condition :3m_Horizontal
Mode :LTE_B26_3M_QPSK_CH26775+TX_ax40_2452MHz
Test BY :Ashton

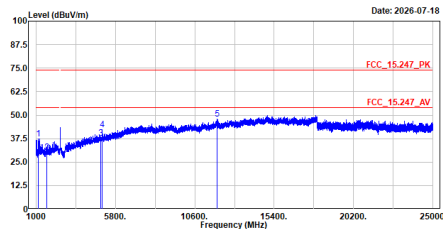


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1133.450	37.53	74.00	-36.47	63.53	-26.00	Peak
2	1645.000	30.25	74.00	-43.75	55.69	-25.44	Peak
3	4904.000	37.68	74.00	-36.32	52.49	-14.81	Peak
4	5000.100	42.29	74.00	-31.71	56.67	-14.38	Peak
5	11954.800	48.09	74.00	-25.91	50.22	-2.13	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_3M_QPSK_CH26775+TX_ax40_2452MHz_V

Site :HY-CB03
Condition :3m_Vertical
Mode :LTE_B26_3M_QPSK_CH26775+TX_ax40_2452MHz
Test BY :Ashton

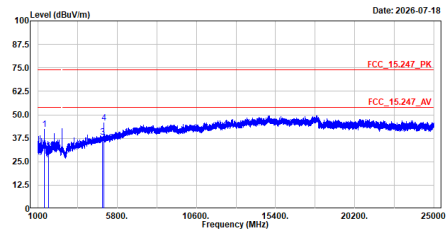


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1397.000	42.23	74.00	-31.77	67.71	-25.48	Peak
2	1645.000	30.49	74.00	-43.51	55.93	-25.44	Peak
3	4904.000	37.96	74.00	-36.04	52.77	-14.81	Peak
4	4995.000	45.57	74.00	-28.43	59.98	-14.41	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz_H

Site :HY-CB03
Condition :3m_Horizontal
Mode :LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz
Test BY :Ashton

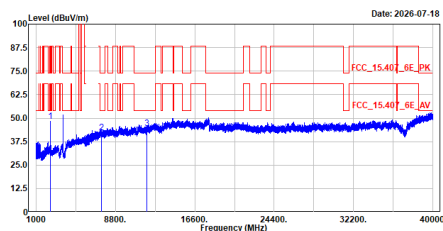


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.600	48.23	88.22	-39.99	72.10	-23.87	Peak
2	7395.000	42.35	74.00	-31.65	49.79	-7.44	Peak
3	11870.000	44.60	74.00	-29.40	46.67	-2.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz_V

Site :HY-CB03
Condition :3m_Vertical
Mode :LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz
Test BY :Ashton

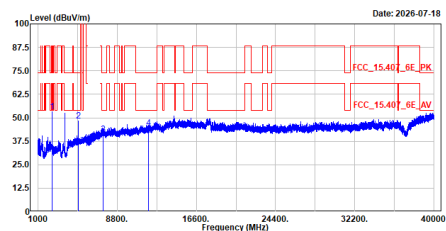


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	53.30	88.22	-34.92	77.17	-23.87	Peak
2	4980.550	40.44	74.00	-33.56	62.92	-14.48	Peak
3	7395.000	41.28	74.00	-32.72	48.72	-7.44	Peak
4	11870.000	44.70	74.00	-29.30	46.77	-2.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B7_20M_QPSK_CH21100+TX_ax20_5700MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7_20M_QPSK_CH21100+TX_ax20_5700MHz
Test BY :Ashton

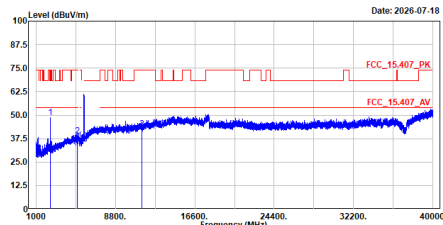


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2398.250	48.81	68.22	-19.41	72.68	-23.87	Peak
2	5070.000	38.75	74.00	-35.25	52.94	-14.19	Peak
3	11400.000	42.83	74.00	-31.17	45.40	-2.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B7_20M_QPSK_CH21100+TX_ax20_5700MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7_20M_QPSK_CH21100+TX_ax20_5700MHz
Test BY :Ashton

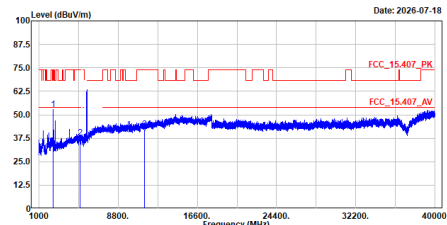


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2398.300	53.00	68.22	-15.22	76.86	-23.86	Peak
2	5070.000	37.75	74.00	-36.25	51.94	-14.19	Peak
3	11400.000	42.26	74.00	-31.74	44.83	-2.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B25_1.4M_QPSK_CH26365+TX_ax20_5700MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B25_1.4M_QPSK_CH26365+TX_ax20_5700MHz
Test BY :Rock

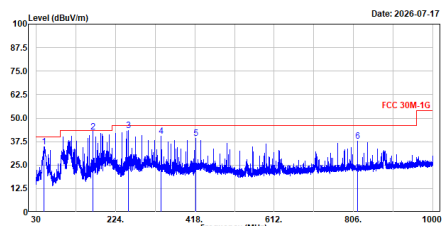


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	49.400	34.62	40.00	-5.38	58.17	-23.55	QP
2	168.031	42.54	43.50	-0.96	66.83	-24.29	QP
3	256.010	43.31	46.00	-2.69	68.15	-24.84	QP
4	336.035	40.31	46.00	-5.69	62.38	-22.07	QP
5	420.037	39.18	46.00	-6.82	59.37	-20.19	QP
6	816.088	37.87	46.00	-8.13	50.41	-12.54	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B25_1.4M_QPSK_CH26365+TX_ax20_5700MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B25_1.4M_QPSK_CH26365+TX_ax20_5700MHz
Test BY :Rock

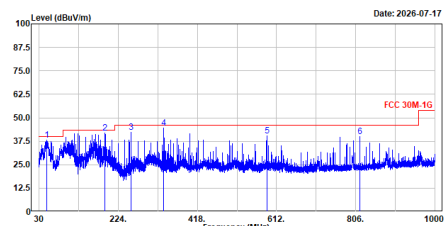

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	48.333	38.06	40.00	-1.94	61.57	-23.51	QP
2	191.990	41.73	43.50	-1.77	68.29	-26.56	QP
3	256.010	42.42	46.00	-3.58	67.26	-24.84	QP
4	336.035	44.45	46.00	-1.55	66.52	-22.07	QP
5	588.041	40.28	46.00	-5.72	56.49	-16.21	QP
6	816.088	40.17	46.00	-5.83	52.71	-12.54	QP


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz_H Site :HY-CB03 Condition :3m ,Horizontal Mode :LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz Test BY :Rock

LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz
Test BY :Rock

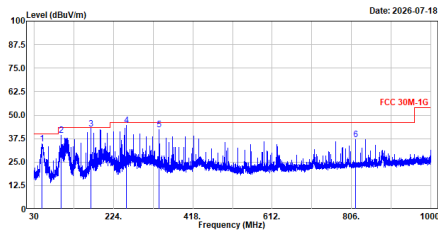


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	49.206	34.77	48.00	-5.23	58.30	-23.53	QP
2	95.960	39.26	43.50	-4.24	68.27	-29.01	QP
3	168.031	42.76	43.50	-0.74	67.05	-24.29	QP
4	256.010	44.51	46.00	-1.49	69.35	-24.84	QP
5	336.035	42.41	46.00	-3.59	64.48	-22.07	QP
6	816.185	36.87	46.00	-9.13	49.41	-12.54	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz
Test BY :Rock

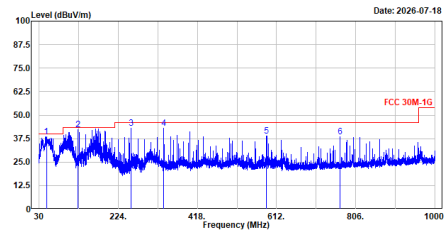


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	47.945	38.65	48.00	-1.35	62.17	-23.52	QP
2	125.060	42.15	43.50	-1.35	68.10	-25.95	QP
3	256.010	42.95	46.00	-3.05	67.79	-24.84	QP
4	336.035	43.01	46.00	-2.99	65.08	-22.07	QP
5	587.847	38.99	46.00	-7.01	55.20	-16.21	QP
6	768.170	38.46	46.00	-7.54	51.41	-12.95	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B7_20M_QPSK_CH21100+TX_ax20_5700MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7_20M_QPSK_CH21100+TX_ax20_5700MHz
Test BY :Rock

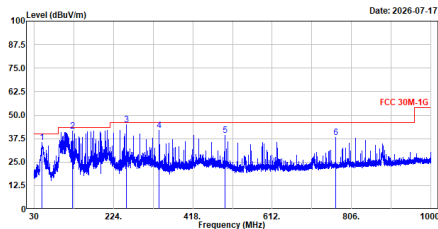


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	48.042	35.53	48.00	-4.47	59.04	-23.51	QP
2	123.993	41.35	43.50	-2.15	67.32	-25.97	QP
3	256.010	45.03	46.00	-0.97	69.87	-24.84	QP
4	336.035	41.87	46.00	-4.13	63.94	-22.07	QP
5	496.085	39.06	46.00	-6.94	57.41	-18.35	QP
6	768.170	38.27	46.00	-7.73	51.22	-12.95	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B7_20M_QPSK_CH21100+TX_ax20_5700MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7_20M_QPSK_CH21100+TX_ax20_5700MHz
Test BY :Rock

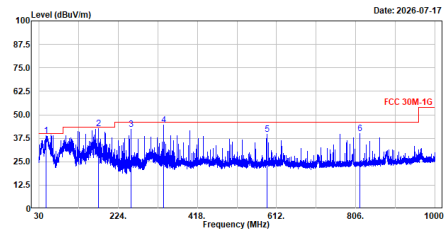

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	47.848	38.80	48.00	-1.20	62.33	-23.53	QP
2	175.985	42.62	43.50	-0.88	67.57	-24.95	QP
3	256.010	42.40	46.00	-3.60	67.24	-24.84	QP
4	336.035	44.39	46.00	-1.61	66.46	-22.07	QP
5	580.118	39.59	46.00	-6.41	55.80	-16.21	QP
6	816.088	40.12	46.00	-5.88	52.66	-12.54	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.