


Main Antenna Test Result

Project Number: P-EE26060694
Test Time: 2026-08-02_20.04.42

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11b CH1 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT2

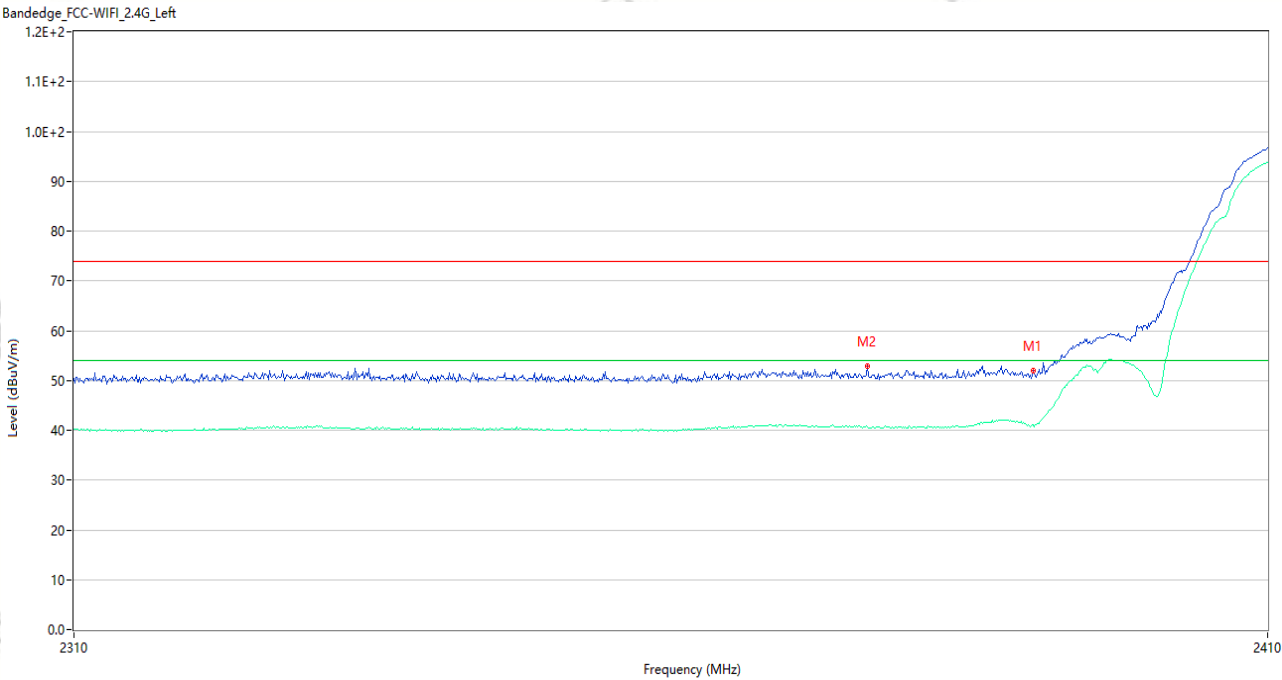


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.97	-4.87	74.0	22.03	Peak	206.10	150	Vertical	Pass
1**	2390.000	41.04	-4.87	54.0	12.96	AV	206.10	150	Vertical	Pass
2	2376.000	52.99	-4.19	74.0	21.01	Peak	63.00	150	Vertical	Pass
2**	2376.000	40.63	-4.19	54.0	13.37	AV	63.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_20.29.15

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11b CH1 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT2

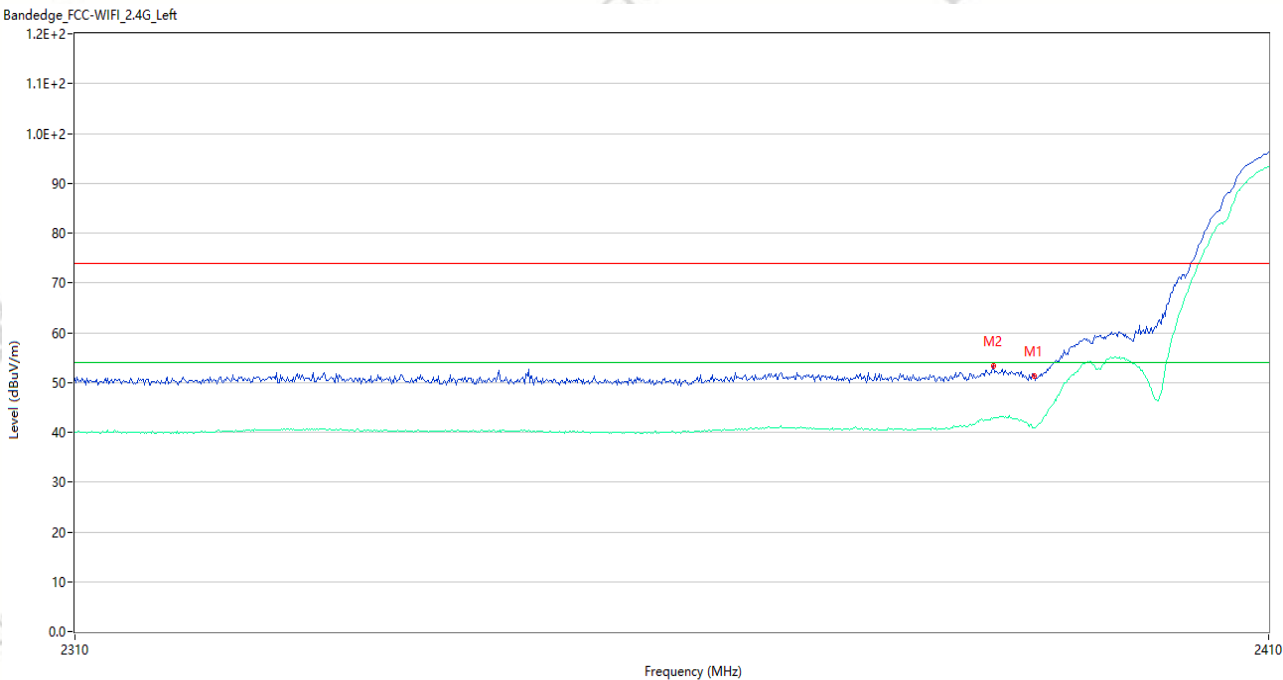


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.25	-4.87	74.0	22.75	Peak	204.13	150	Horizontal	Pass
1**	2390.000	40.88	-4.87	54.0	13.12	AV	204.13	150	Horizontal	Pass
2	2386.600	53.25	-4.67	74.0	20.75	Peak	247.00	150	Horizontal	Pass
2**	2386.600	43.00	-4.67	54.0	11.00	AV	247.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_19.26.38

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11b CH11 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT2

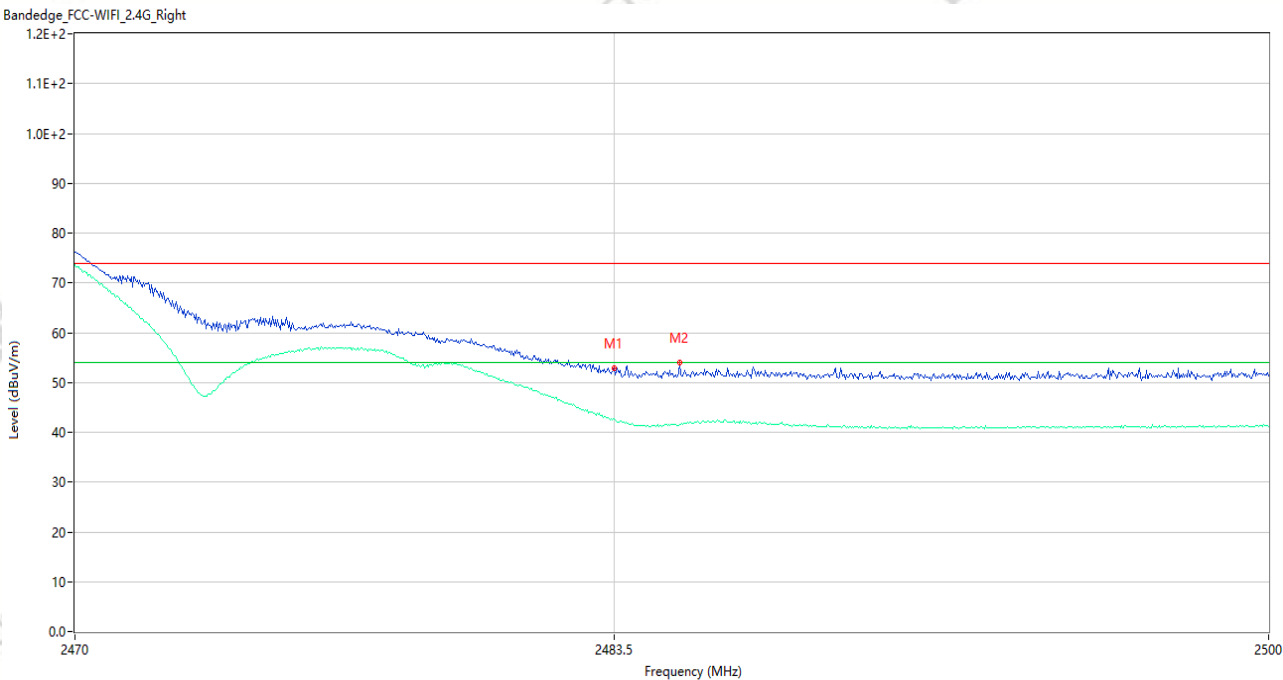


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	52.96	-3.78	74.0	21.04	Peak	0.00	150	Vertical	Pass
1**	2483.500	42.74	-3.78	54.0	11.26	AV	0.00	150	Vertical	Pass
2	2485.150	53.96	-3.78	74.0	20.04	Peak	16.00	150	Vertical	Pass
2**	2485.150	41.64	-3.78	54.0	12.36	AV	16.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_19.23.50

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11b CH11 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT2

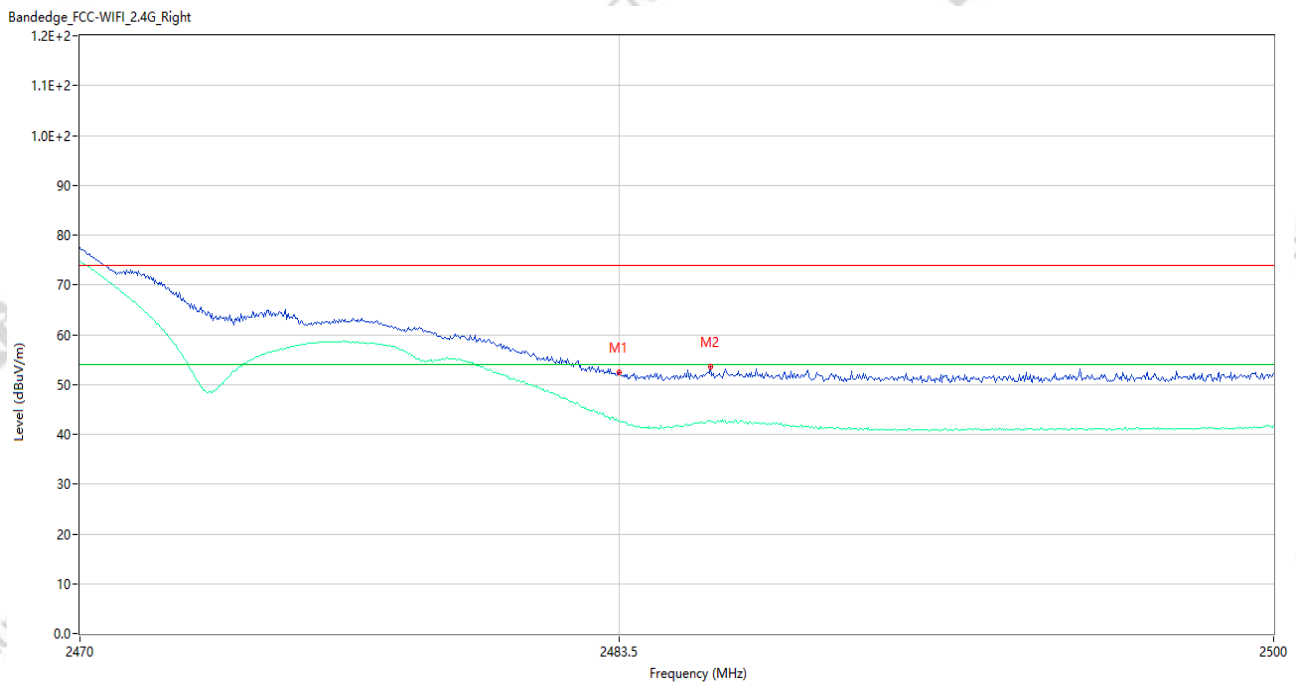


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	52.44	-3.78	74.0	21.56	Peak	75.00	150	Horizontal	Pass
1**	2483.500	42.73	-3.78	54.0	11.27	AV	75.00	150	Horizontal	Pass
2	2485.810	53.56	-3.78	74.0	20.44	Peak	63.00	150	Horizontal	Pass
2**	2485.810	42.76	-3.78	54.0	11.24	AV	63.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_20.14.29

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11g CH1 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT2

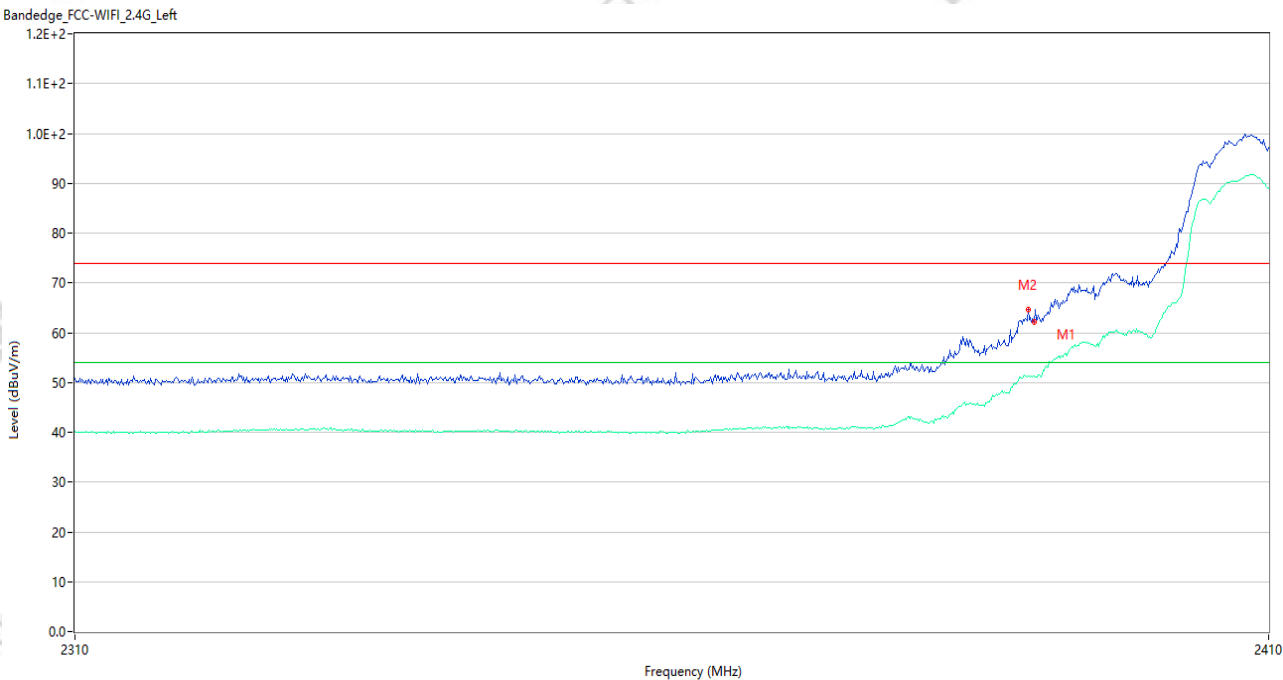


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	62.16	-4.87	74.0	11.84	Peak	359.55	150	Vertical	Pass
1**	2390.000	51.23	-4.87	54.0	2.77	AV	359.55	150	Vertical	Pass
2	2389.500	64.56	-4.85	74.0	9.44	Peak	9.00	150	Vertical	Pass
2**	2389.500	51.36	-4.85	54.0	2.64	AV	9.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694
Test Time: 2026-08-02_20.12.04

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11g CH1 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT2

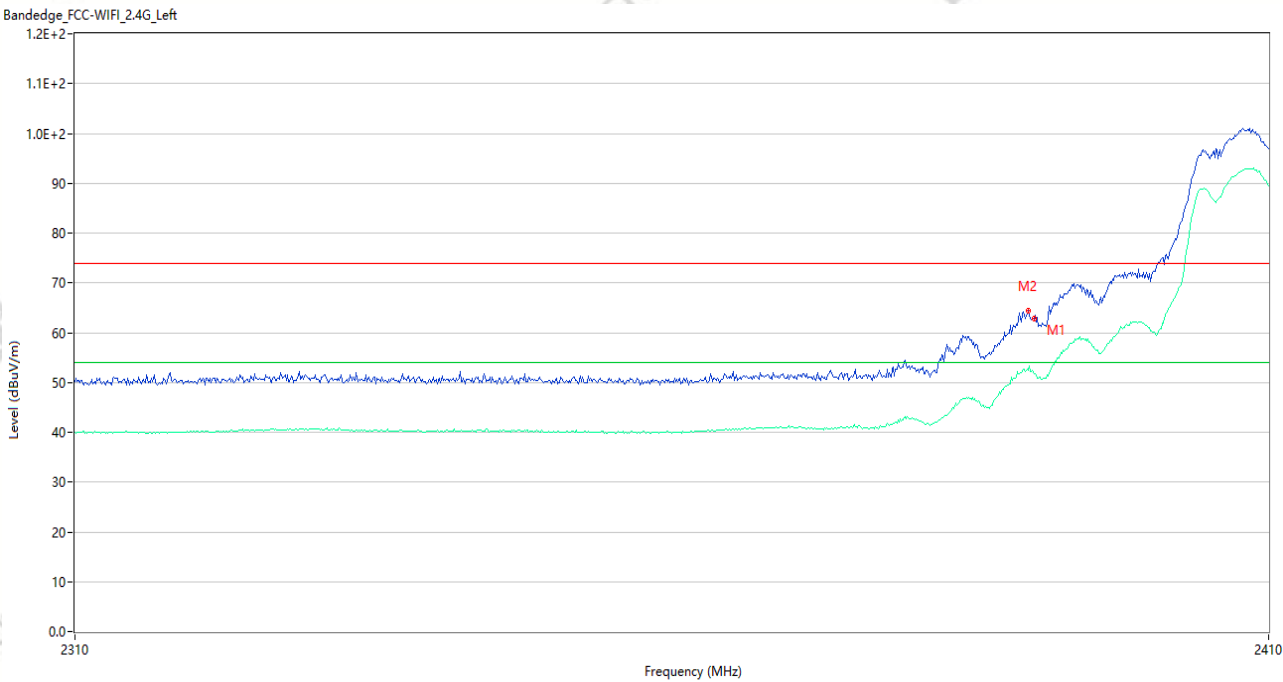

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	62.88	-4.87	74.0	11.12	Peak	97.98	150	Horizontal	Pass
1**	2390.000	51.83	-4.87	54.0	2.17	AV	97.98	150	Horizontal	Pass
2	2389.500	64.34	-4.85	74.0	9.66	Peak	98.00	150	Horizontal	Pass
2**	2389.500	52.46	-4.85	54.0	1.54	AV	98.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_19.50.53

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11g CH11 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT2



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.440	64.24	-3.78	74.0	9.76	Peak	360.00	150	Vertical	Pass
1**	2483.440	53.25	-3.78	54.0	0.75	AV	360.00	150	Vertical	Pass
2	2483.560	65.45	-3.78	74.0	8.55	Peak	14.00	150	Vertical	Pass
2**	2483.560	52.85	-3.78	54.0	1.15	AV	14.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_19.53.10

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11g CH11 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT2




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	64.98	-3.78	74.0	9.02	Peak	106.00	150	Horizontal	Pass
1**	2483.500	52.78	-3.78	54.0	1.22	AV	106.00	150	Horizontal	Pass
2	2483.740	64.83	-3.78	74.0	9.17	Peak	96.00	150	Horizontal	Pass
2**	2483.740	51.30	-3.78	54.0	2.70	AV	96.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-07-28_07.20.35

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	49
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n20 CH1 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	实验室数据线 ANT2

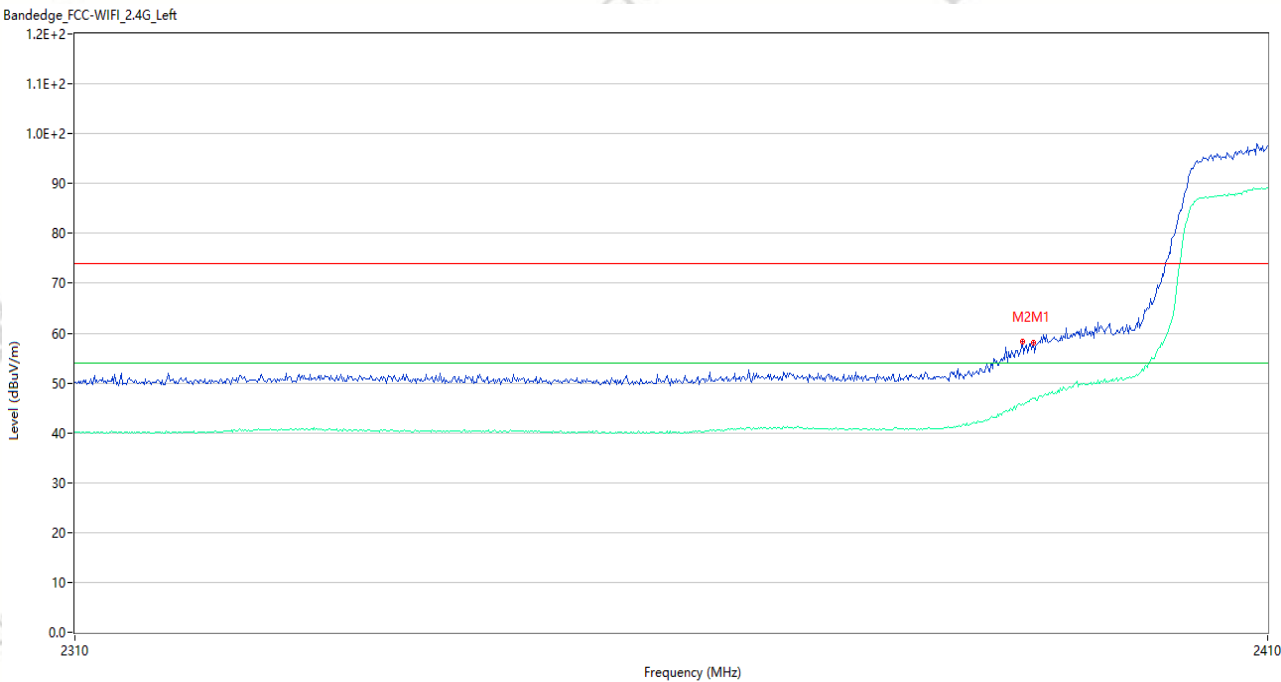


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	58.17	-4.87	74.0	15.83	Peak	213.98	150	Vertical	Pass
1**	2390.000	46.88	-4.87	54.0	7.12	AV	213.98	150	Vertical	Pass
2	2389.100	58.21	-4.82	74.0	15.79	Peak	212.00	150	Vertical	Pass
2**	2389.100	45.87	-4.82	54.0	8.13	AV	212.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-07-28_07.17.15

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	49
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n20 CH1 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	实验室数据线 ANT2

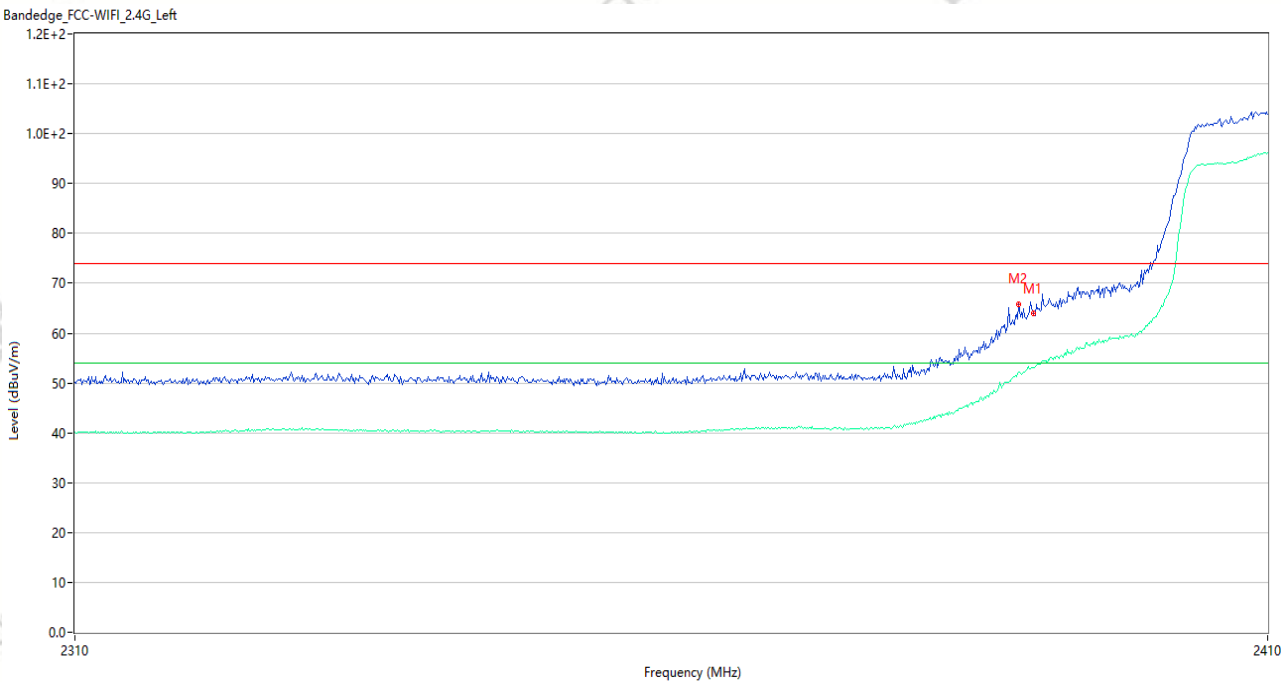


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	64.05	-4.87	74.0	9.95	Peak	41.98	150	Horizontal	Pass
1**	2390.000	53.03	-4.87	54.0	0.97	AV	41.98	150	Horizontal	Pass
2	2388.800	65.81	-4.81	74.0	8.19	Peak	42.00	150	Horizontal	Pass
2**	2388.800	52.13	-4.81	54.0	1.87	AV	42.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_19.37.27

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n20 CH11 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT2

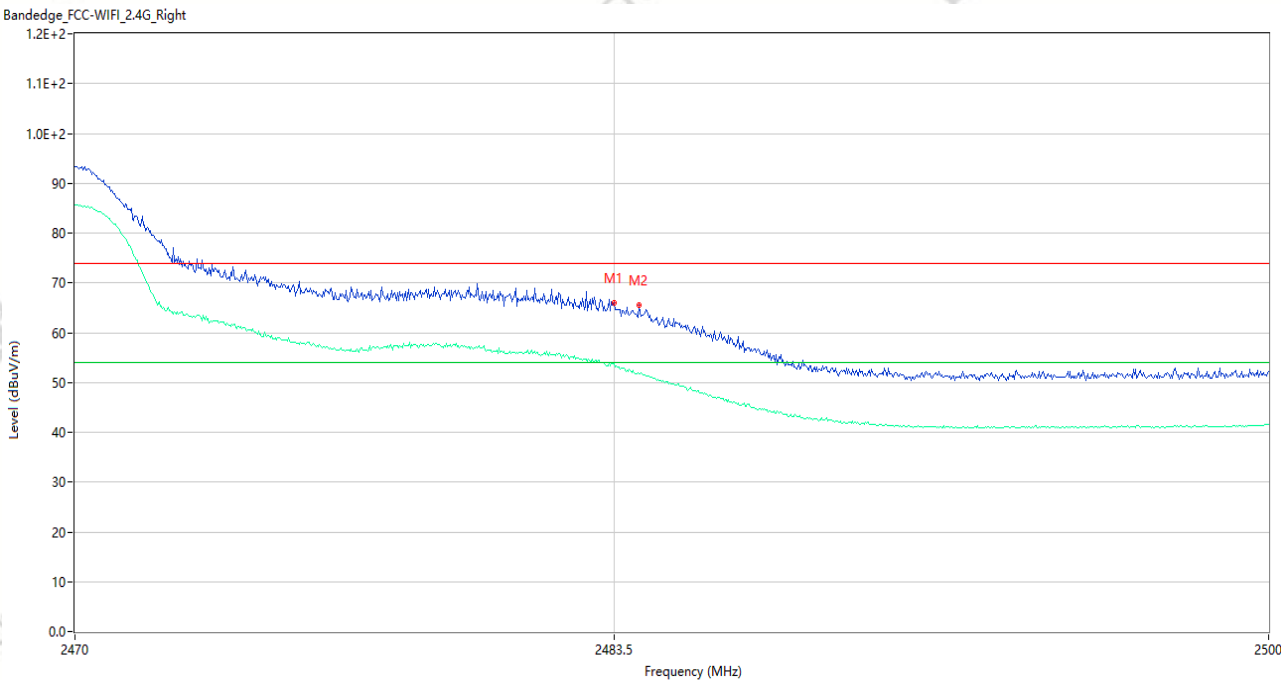


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	66.00	-3.78	74.0	8.00	Peak	12.00	150	Vertical	Pass
1**	2483.500	53.86	-3.78	54.0	0.14	AV	12.00	150	Vertical	Pass
2	2484.130	65.43	-3.78	74.0	8.57	Peak	3.00	150	Vertical	Pass
2**	2484.130	51.66	-3.78	54.0	2.34	AV	3.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_19.39.55

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n20 CH11 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT2

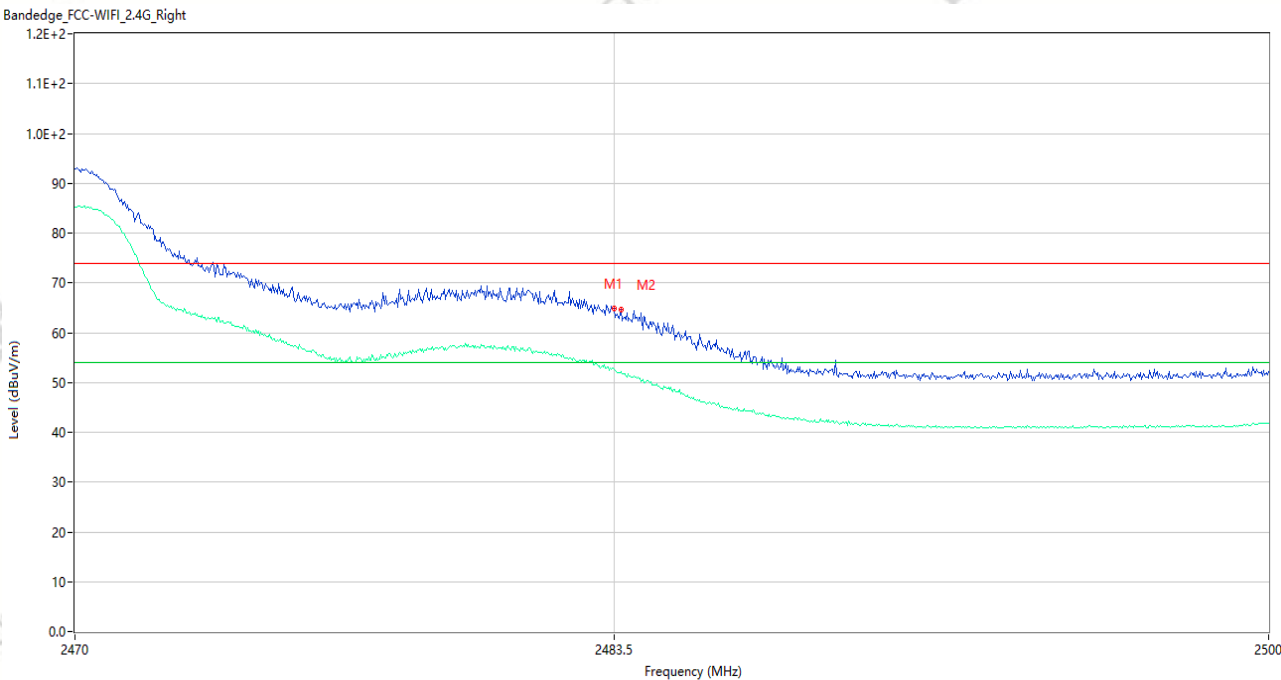


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	64.83	-3.78	74.0	9.17	Peak	75.00	150	Horizontal	Pass
1**	2483.500	52.56	-3.78	54.0	1.44	AV	75.00	150	Horizontal	Pass
2	2483.680	64.58	-3.78	74.0	9.42	Peak	93.00	150	Horizontal	Pass
2**	2483.680	52.13	-3.78	54.0	1.87	AV	93.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-07-28_07.06.14

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	49
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n40 CH3 P=11
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	实验室数据线 ANT2

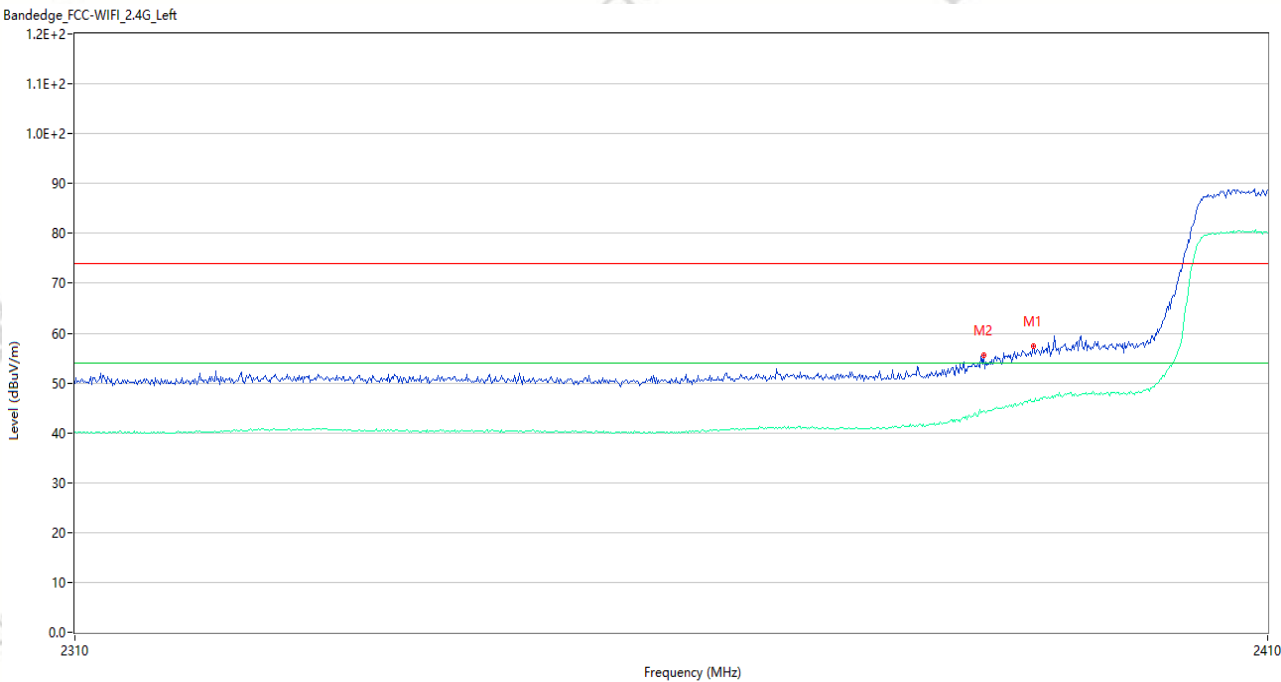


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	57.35	-4.87	74.0	16.65	Peak	157.08	150	Vertical	Pass
1**	2390.000	46.34	-4.87	54.0	7.66	AV	157.08	150	Vertical	Pass
2	2385.800	55.49	-4.63	74.0	18.51	Peak	157.00	150	Vertical	Pass
2**	2385.800	44.36	-4.63	54.0	9.64	AV	157.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-07-28_07.02.48

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	49
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n40 CH3 P=11
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	实验室数据线 ANT2

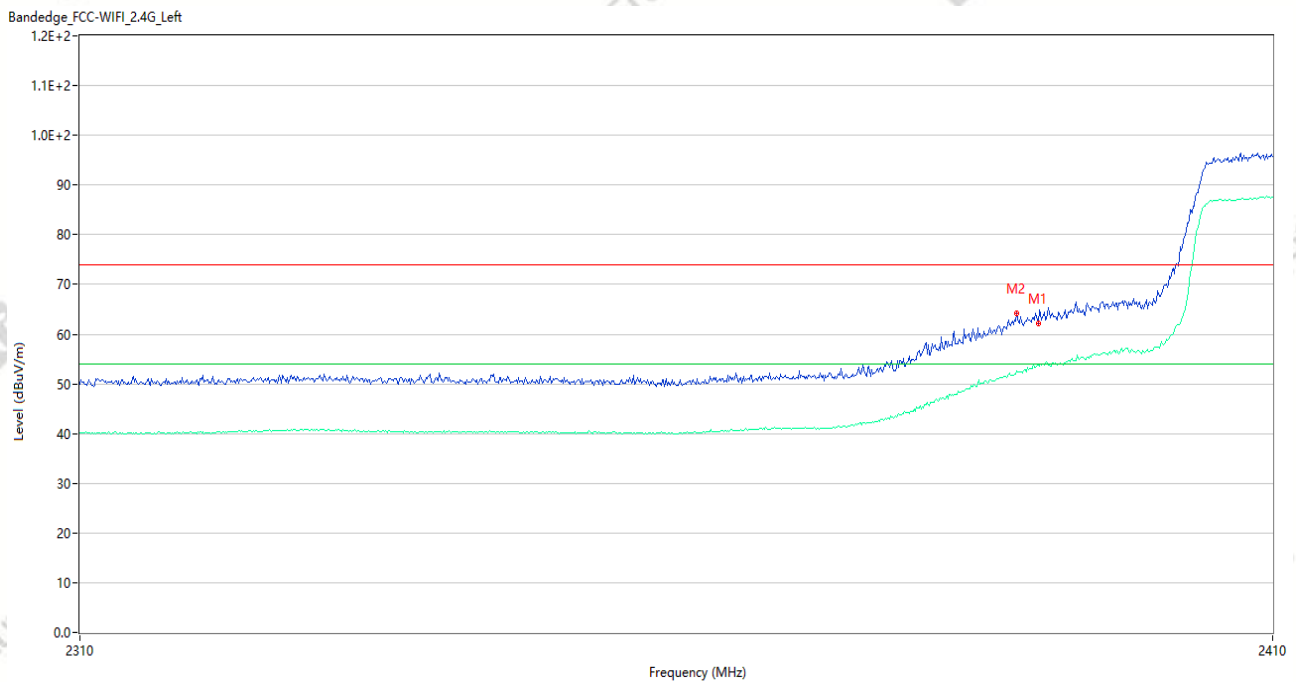


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	62.08	-4.87	74.0	11.92	Peak	30.99	150	Horizontal	Pass
1**	2390.000	53.82	-4.87	54.0	0.18	AV	30.99	150	Horizontal	Pass
2	2388.200	64.10	-4.78	74.0	9.90	Peak	23.00	150	Horizontal	Pass
2**	2388.200	52.53	-4.78	54.0	1.47	AV	23.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694
Test Time: 2026-07-28_06.30.22

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	49
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n40 CH9 P=11.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	实验室数据线 ANT2

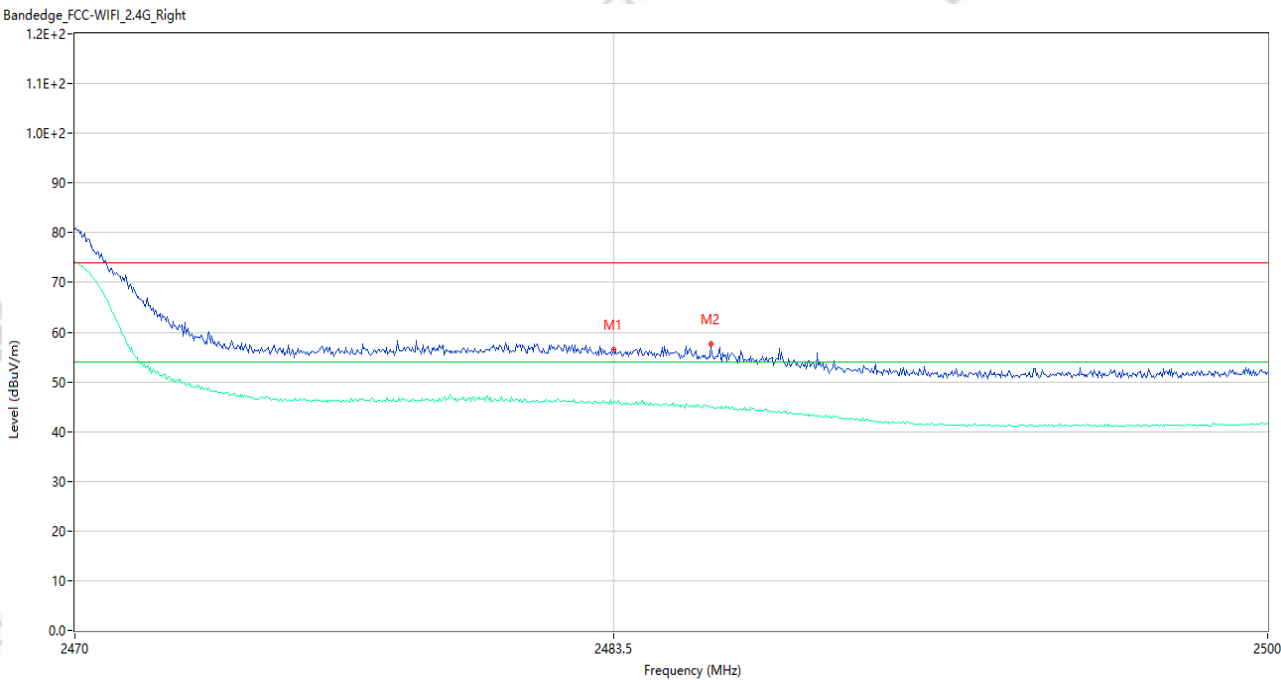


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	56.56	-3.78	74.0	17.44	Peak	188.00	150	Vertical	Pass
1**	2483.500	45.85	-3.78	54.0	8.15	AV	188.00	150	Vertical	Pass
2	2485.960	57.66	-3.79	74.0	16.34	Peak	228.00	150	Vertical	Pass
2**	2485.960	44.97	-3.79	54.0	9.03	AV	228.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-07-28_06.27.08

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	49
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n40 CH9 P=11.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	实验室数据线 ANT2

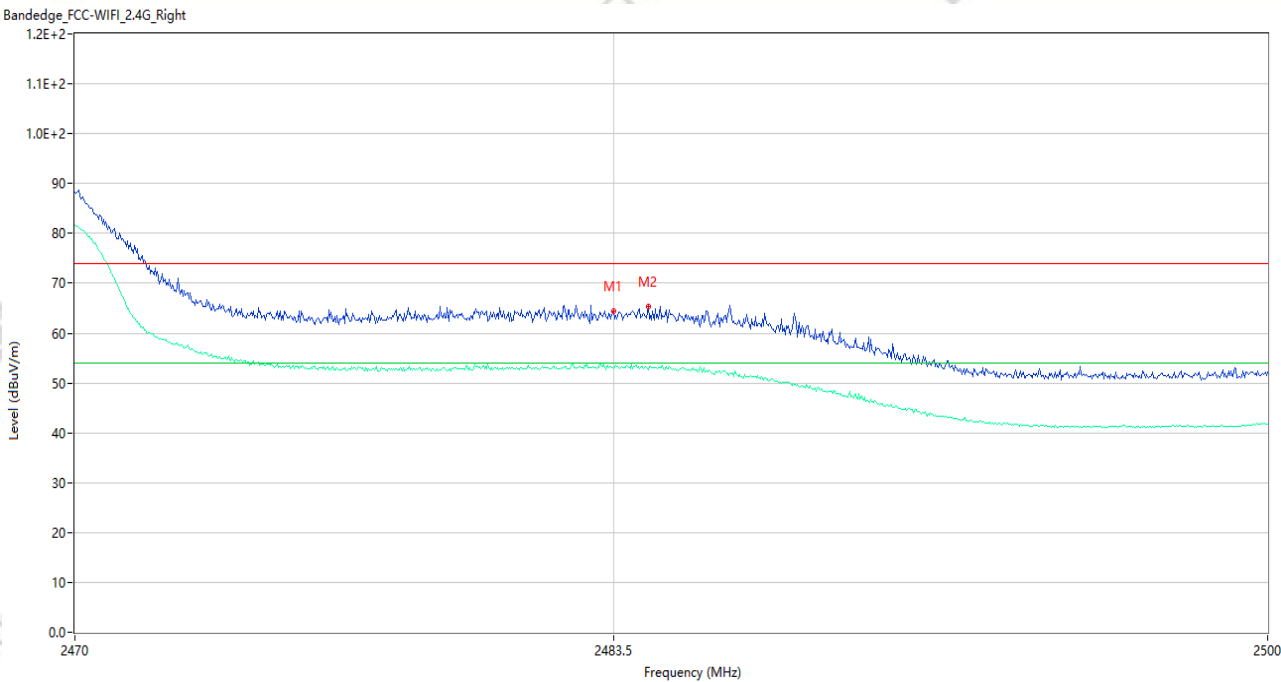


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	64.40	-3.78	74.0	9.60	Peak	23.00	150	Horizontal	Pass
1**	2483.500	52.88	-3.78	54.0	1.12	AV	23.00	150	Horizontal	Pass
2	2484.370	65.26	-3.78	74.0	8.74	Peak	37.00	150	Horizontal	Pass
2**	2484.370	52.73	-3.78	54.0	1.27	AV	37.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-07-28_05.58.27

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	49
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11ax20 CH1 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	实验室数据线 ANT2

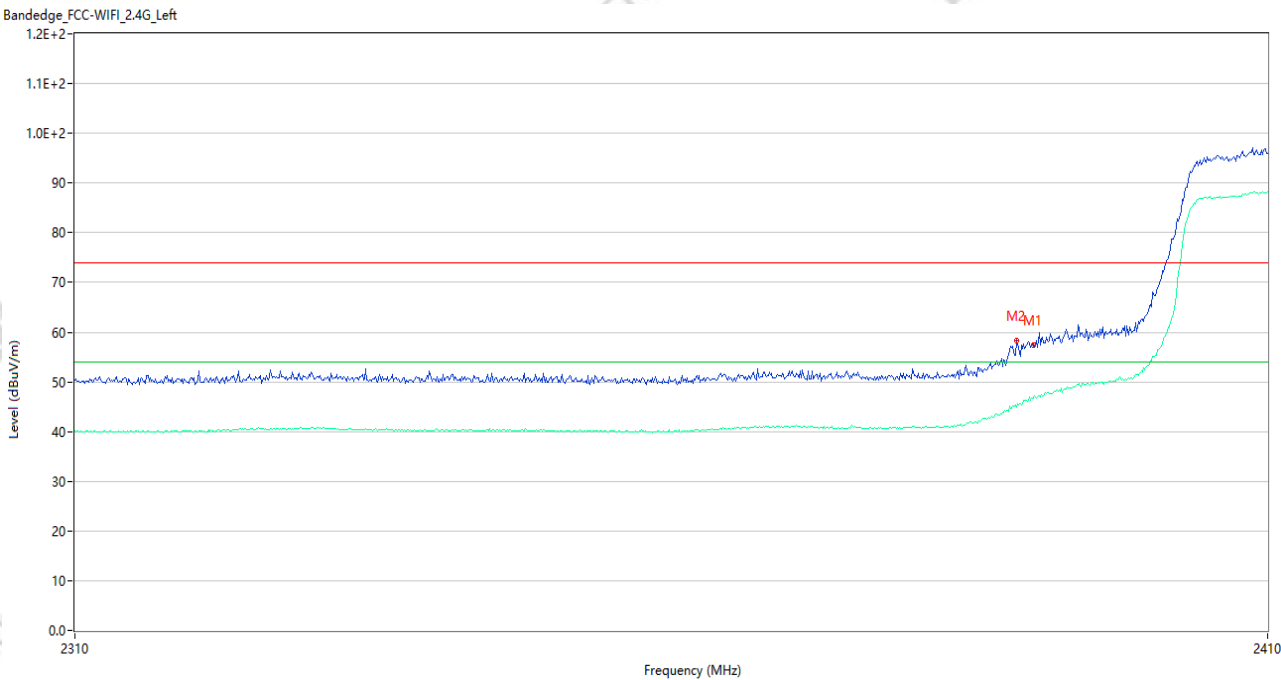


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	57.34	-4.87	74.0	16.66	Peak	211.00	150	Vertical	Pass
1**	2390.000	46.72	-4.87	54.0	7.28	AV	211.00	150	Vertical	Pass
2	2388.600	58.40	-4.80	74.0	15.60	Peak	173.00	150	Vertical	Pass
2**	2388.600	44.98	-4.80	54.0	9.02	AV	173.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-07-28_05.57.12

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	49
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11ax20 CH1 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	实验室数据线 ANT2

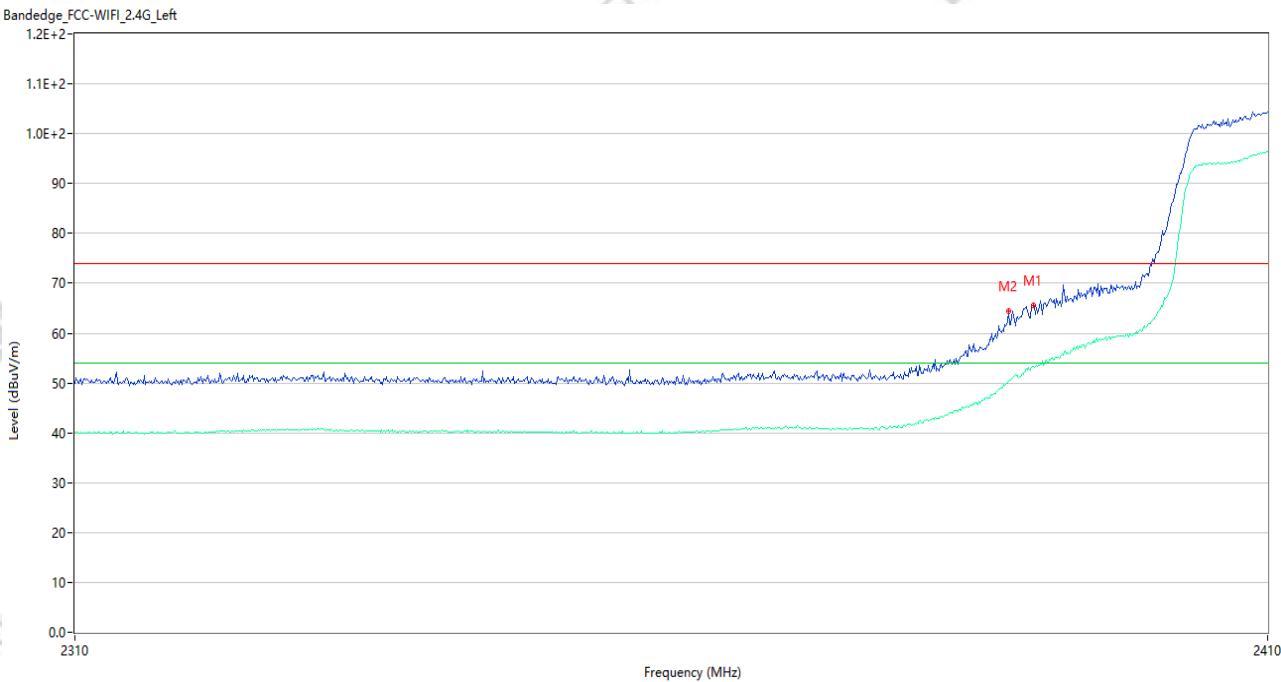


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	65.53	-4.87	74.0	8.47	Peak	39.01	150	Horizontal	Pass
1**	2390.000	53.29	-4.87	54.0	0.71	AV	39.01	150	Horizontal	Pass
2	2387.900	64.32	-4.76	74.0	9.68	Peak	23.00	150	Horizontal	Pass
2**	2387.900	50.37	-4.76	54.0	3.63	AV	23.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-07-28_06.12.48

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	49
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11ax20 CH11 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	实验室数据线 ANT2

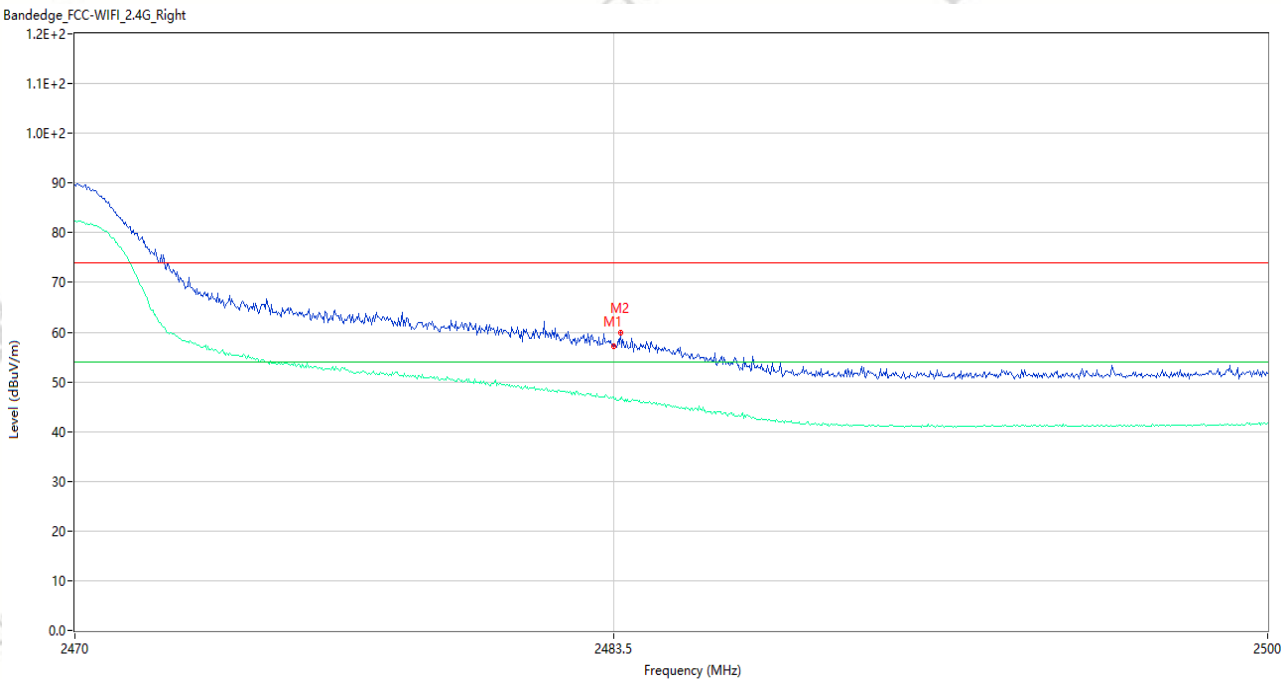


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	57.06	-3.78	74.0	16.94	Peak	117.00	150	Vertical	Pass
1**	2483.500	46.92	-3.78	54.0	7.08	AV	117.00	150	Vertical	Pass
2	2483.680	59.88	-3.78	74.0	14.12	Peak	211.00	150	Vertical	Pass
2**	2483.680	46.41	-3.78	54.0	7.59	AV	211.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-07-28_06.10.56

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	49
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11ax20 CH11 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	实验室数据线 ANT2

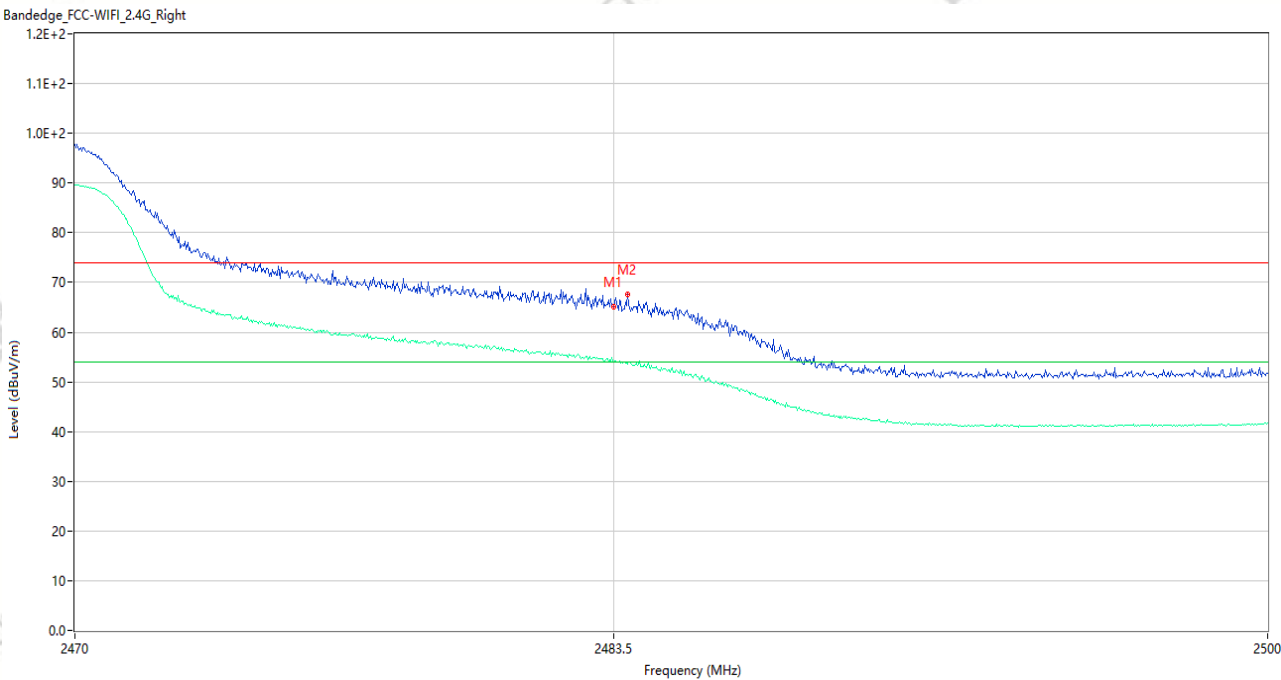


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	65.16	-3.78	74.0	8.84	Peak	47.00	150	Horizontal	Pass
1**	2483.500	53.91	-3.78	54.0	0.09	AV	47.00	150	Horizontal	Pass
2	2483.860	67.64	-3.78	74.0	6.36	Peak	44.00	150	Horizontal	Pass
2**	2483.860	53.63	-3.78	54.0	0.37	AV	44.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694
Test Time: 2026-07-28_05.45.45

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	49
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11ax40 CH3 P=11.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	实验室数据线 ANT2

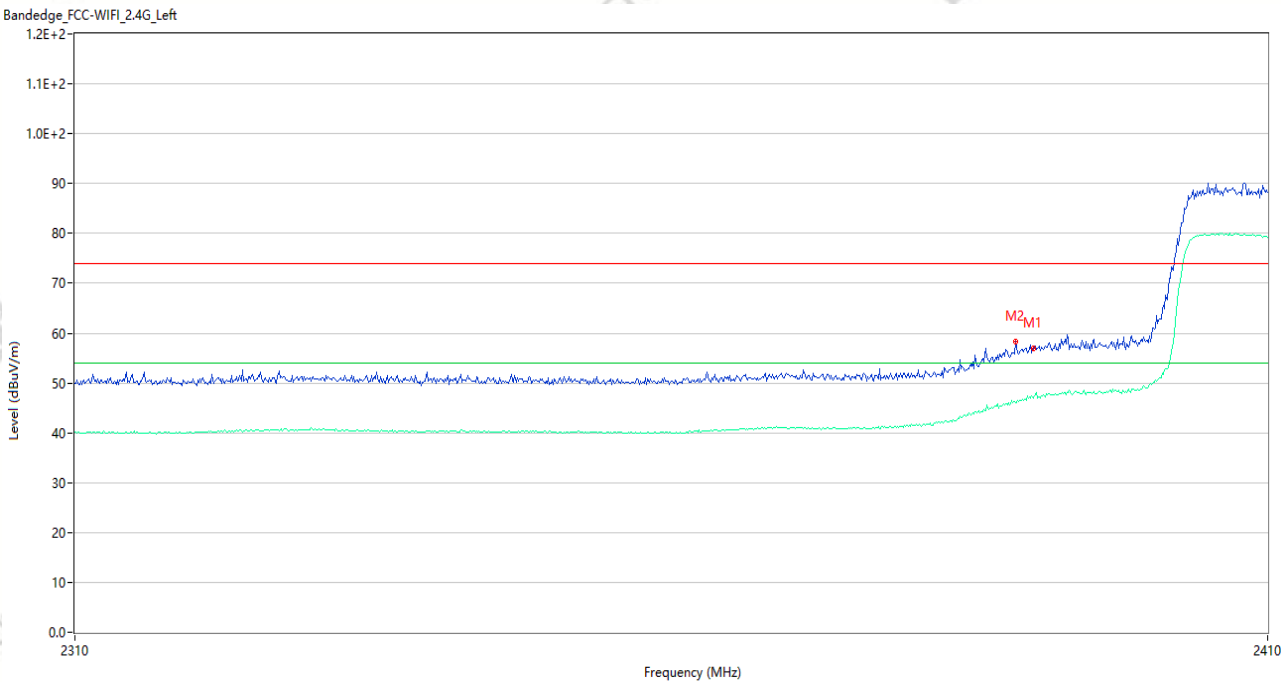


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	56.82	-4.87	74.0	17.18	Peak	213.93	150	Vertical	Pass
1**	2390.000	46.87	-4.87	54.0	7.13	AV	213.93	150	Vertical	Pass
2	2388.500	58.21	-4.79	74.0	15.79	Peak	217.00	150	Vertical	Pass
2**	2388.500	46.06	-4.79	54.0	7.94	AV	217.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-07-28_05.44.25

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	49
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11ax40 CH3 P=11.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	实验室数据线 ANT2

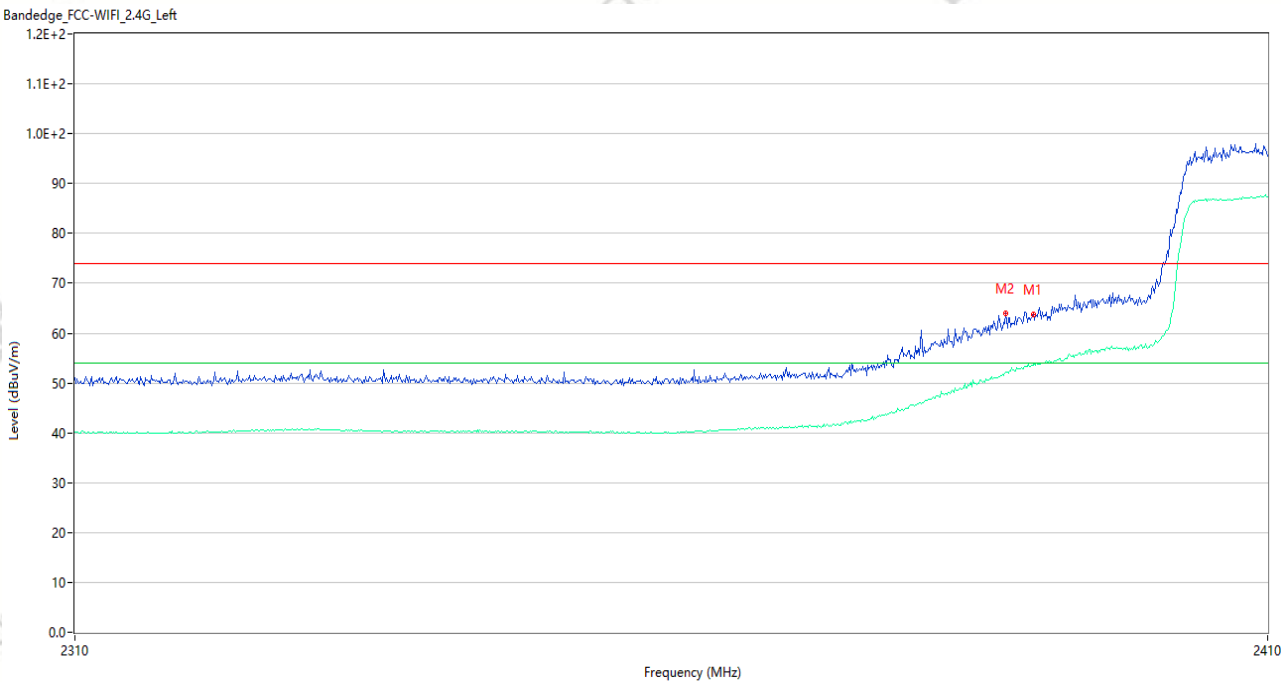


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	63.67	-4.87	74.0	10.33	Peak	42.97	150	Horizontal	Pass
1**	2390.000	53.51	-4.87	54.0	0.49	AV	42.97	150	Horizontal	Pass
2	2387.700	63.89	-4.75	74.0	10.11	Peak	38.00	150	Horizontal	Pass
2**	2387.700	52.13	-4.75	54.0	1.87	AV	38.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-07-28_05.30.38

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	49
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11ax40 CH9 P=12
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	实验室数据线 ANT2

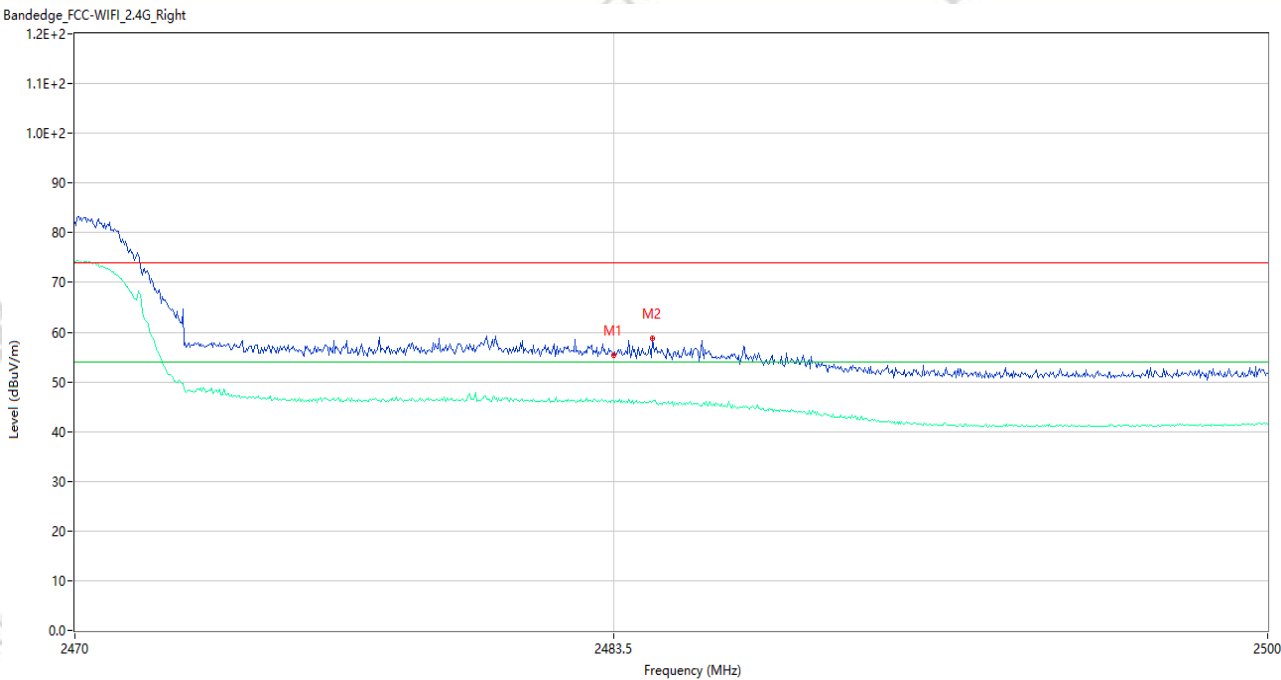


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	55.40	-3.78	74.0	18.60	Peak	216.00	150	Vertical	Pass
1**	2483.500	45.94	-3.78	54.0	8.06	AV	216.00	150	Vertical	Pass
2	2484.490	58.78	-3.78	74.0	15.22	Peak	164.00	150	Vertical	Pass
2**	2484.490	46.06	-3.78	54.0	7.94	AV	164.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694
Test Time: 2026-07-28_05.28.38

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	49
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11ax40 CH9 P=12
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	实验室数据线 ANT2

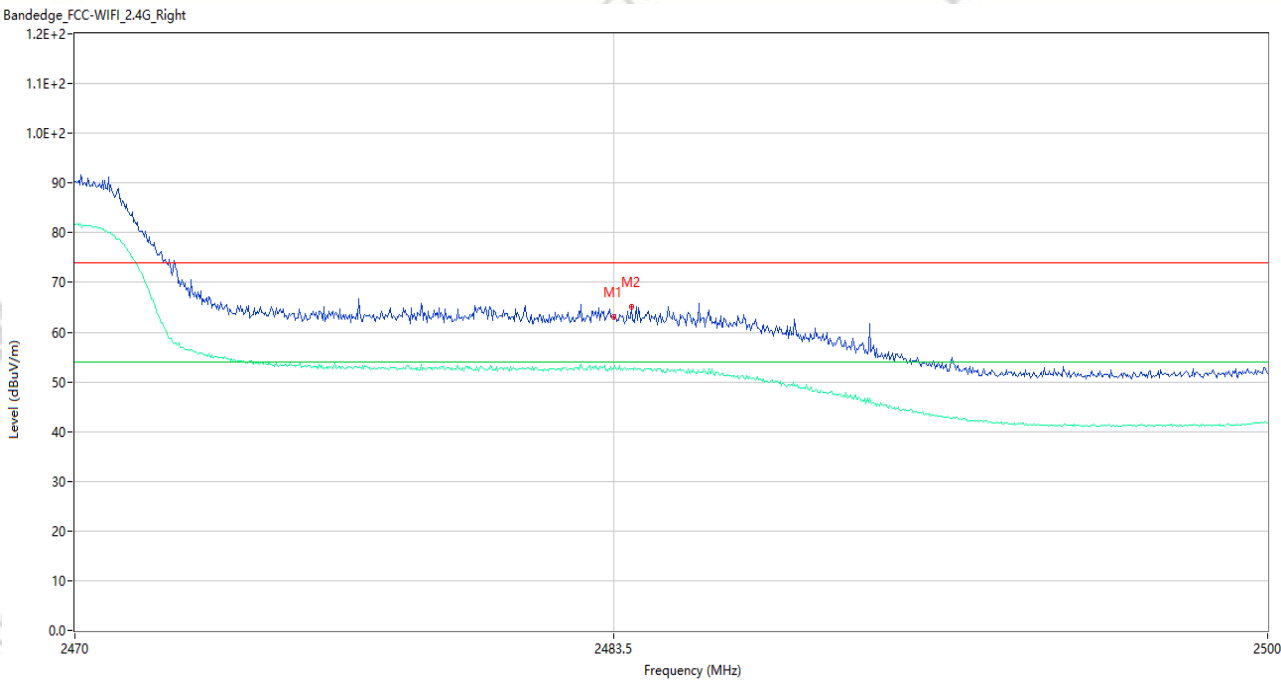


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	62.97	-3.78	74.0	11.03	Peak	44.00	150	Horizontal	Pass
1**	2483.500	52.66	-3.78	54.0	1.34	AV	44.00	150	Horizontal	Pass
2	2483.950	65.13	-3.78	74.0	8.87	Peak	41.00	150	Horizontal	Pass
2**	2483.950	52.69	-3.78	54.0	1.31	AV	41.00	150	Horizontal	Pass

Aux. Antenna Test Result

Project Number: P-EE26060694
Test Time: 2026-08-02_15.03.01

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11b CH1 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

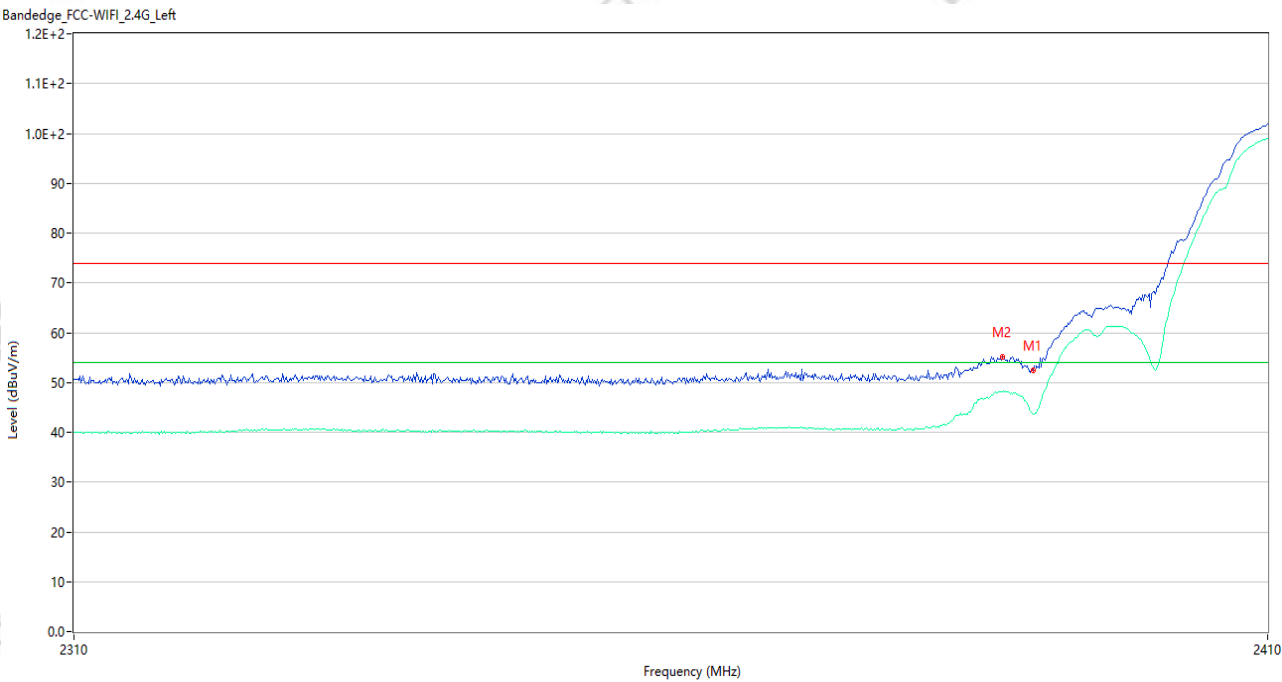


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	52.32	-4.87	74.0	21.68	Peak	307.02	150	Vertical	Pass
1**	2390.000	43.59	-4.87	54.0	10.41	AV	307.02	150	Vertical	Pass
2	2387.400	55.07	-4.73	74.0	18.93	Peak	316.00	150	Vertical	Pass
2**	2387.400	48.11	-4.73	54.0	5.89	AV	316.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_14.59.53

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11b CH1 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

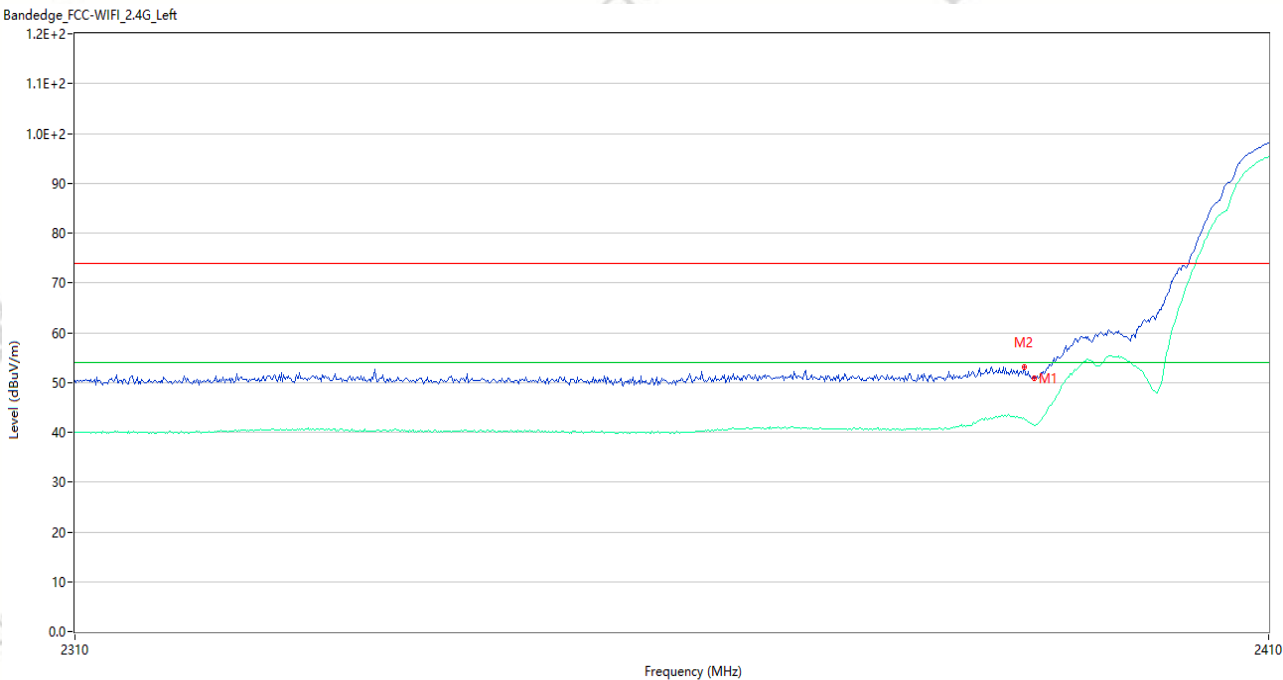


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.95	-4.87	74.0	23.05	Peak	46.38	150	Horizontal	Pass
1**	2390.000	41.29	-4.87	54.0	12.71	AV	46.38	150	Horizontal	Pass
2	2389.200	53.16	-4.83	74.0	20.84	Peak	63.00	150	Horizontal	Pass
2**	2389.200	42.61	-4.83	54.0	11.39	AV	63.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_18.53.38

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11b CH11 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

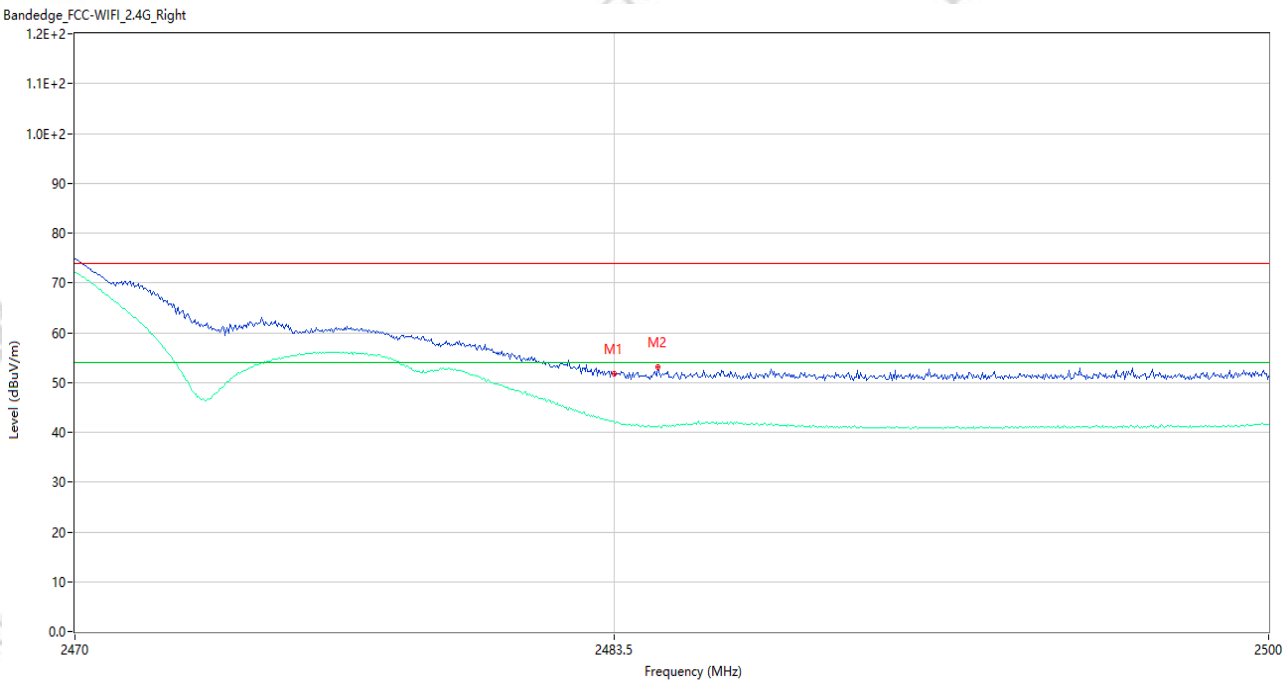


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.76	-3.78	74.0	22.24	Peak	236.00	150	Horizontal	Pass
1**	2483.500	41.96	-3.78	54.0	12.04	AV	236.00	150	Horizontal	Pass
2	2484.610	53.00	-3.78	74.0	21.00	Peak	357.00	150	Horizontal	Pass
2**	2484.610	41.08	-3.78	54.0	12.92	AV	357.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_18.53.38

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11b CH11 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

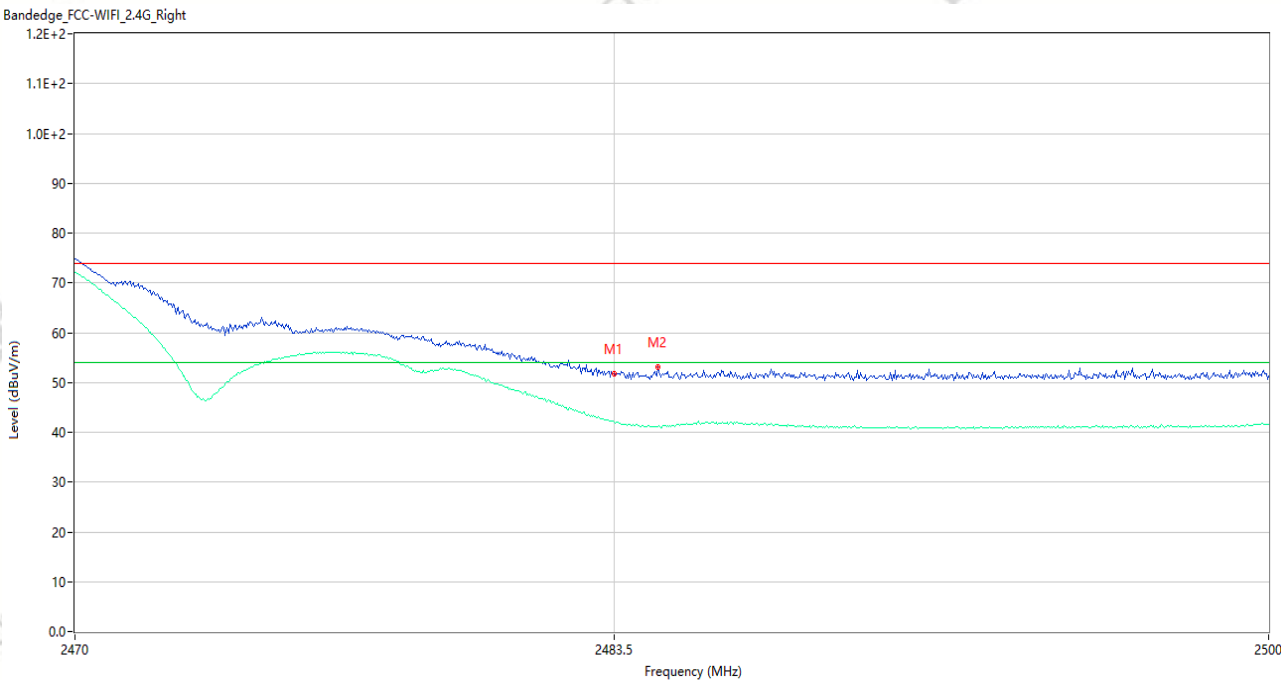


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.76	-3.78	74.0	22.24	Peak	236.00	150	Horizontal	Pass
1**	2483.500	41.96	-3.78	54.0	12.04	AV	236.00	150	Horizontal	Pass
2	2484.610	53.00	-3.78	74.0	21.00	Peak	357.00	150	Horizontal	Pass
2**	2484.610	41.08	-3.78	54.0	12.92	AV	357.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694
Test Time: 2026-08-02_15.10.42

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11g CH1 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

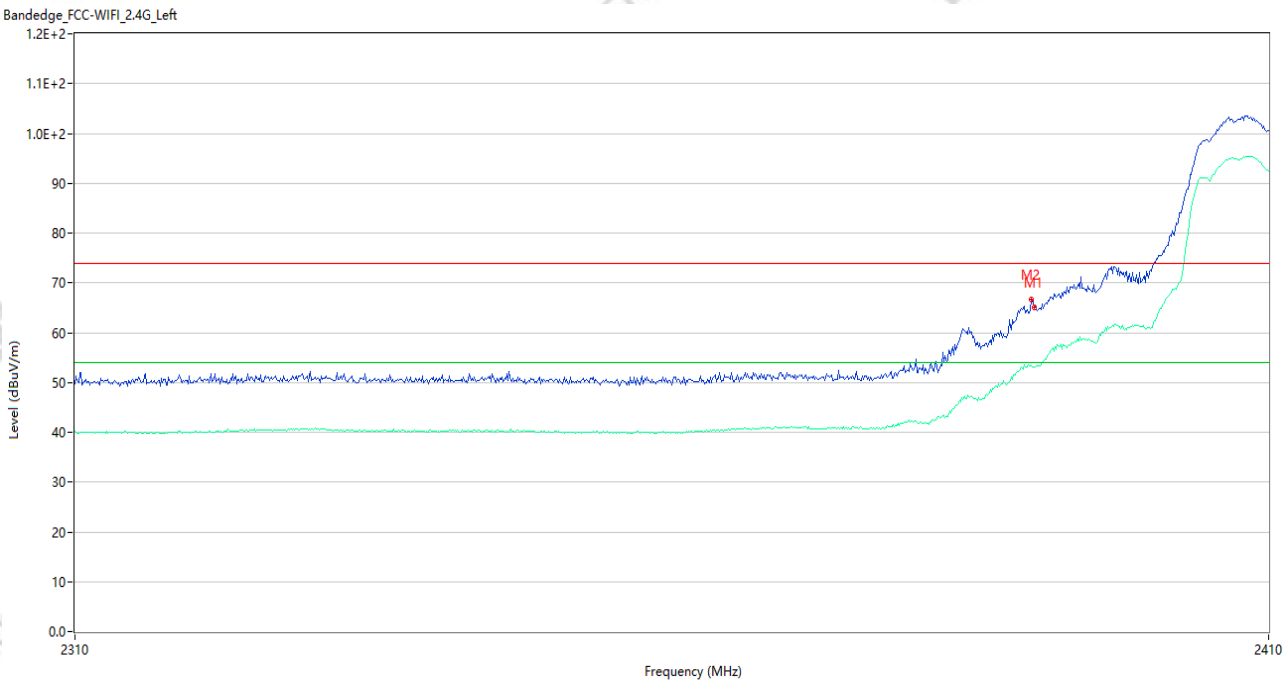


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	65.03	-4.87	74.0	8.97	Peak	1.00	150	Vertical	Pass
1**	2390.000	53.03	-4.87	54.0	0.97	AV	1.00	150	Vertical	Pass
2	2389.800	66.68	-4.86	74.0	7.32	Peak	1.00	150	Vertical	Pass
2**	2389.800	53.29	-4.86	54.0	0.71	AV	1.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_15.14.47

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11g CH1 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

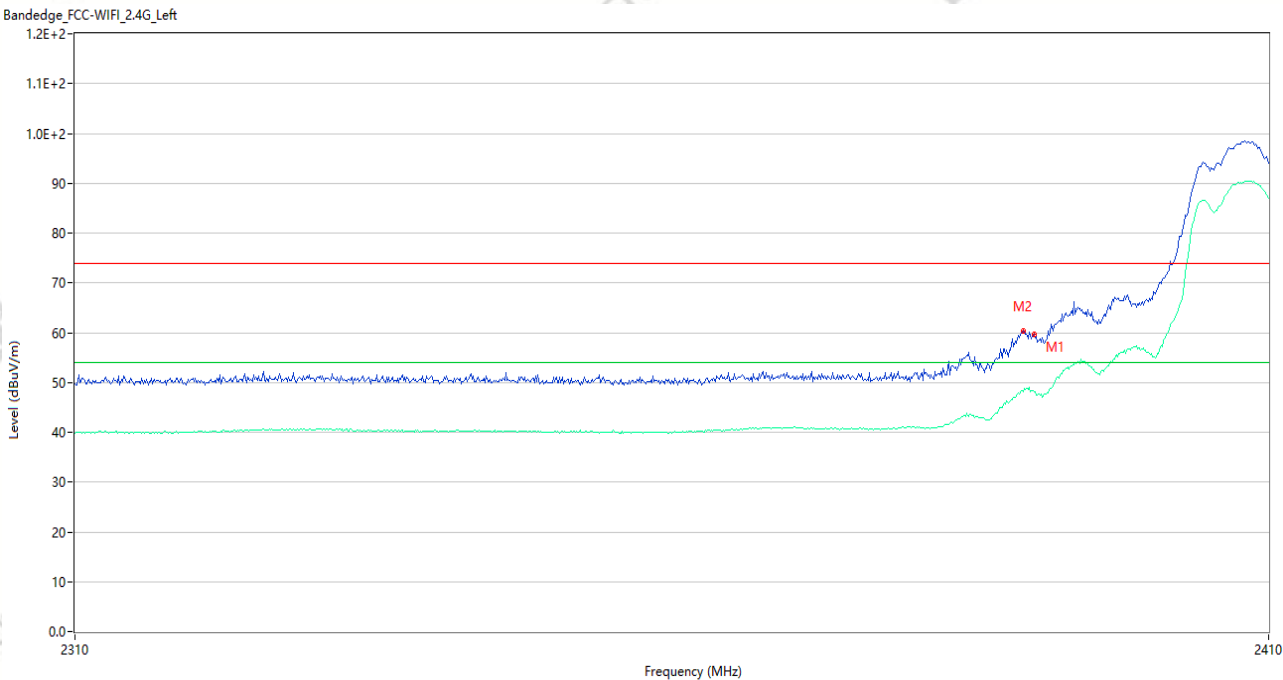


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	59.71	-4.87	74.0	14.29	Peak	24.99	150	Horizontal	Pass
1**	2390.000	48.16	-4.87	54.0	5.84	AV	24.99	150	Horizontal	Pass
2	2389.100	60.25	-4.82	74.0	13.75	Peak	94.00	150	Horizontal	Pass
2**	2389.100	48.18	-4.82	54.0	5.82	AV	94.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_17.55.44

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11g CH11 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

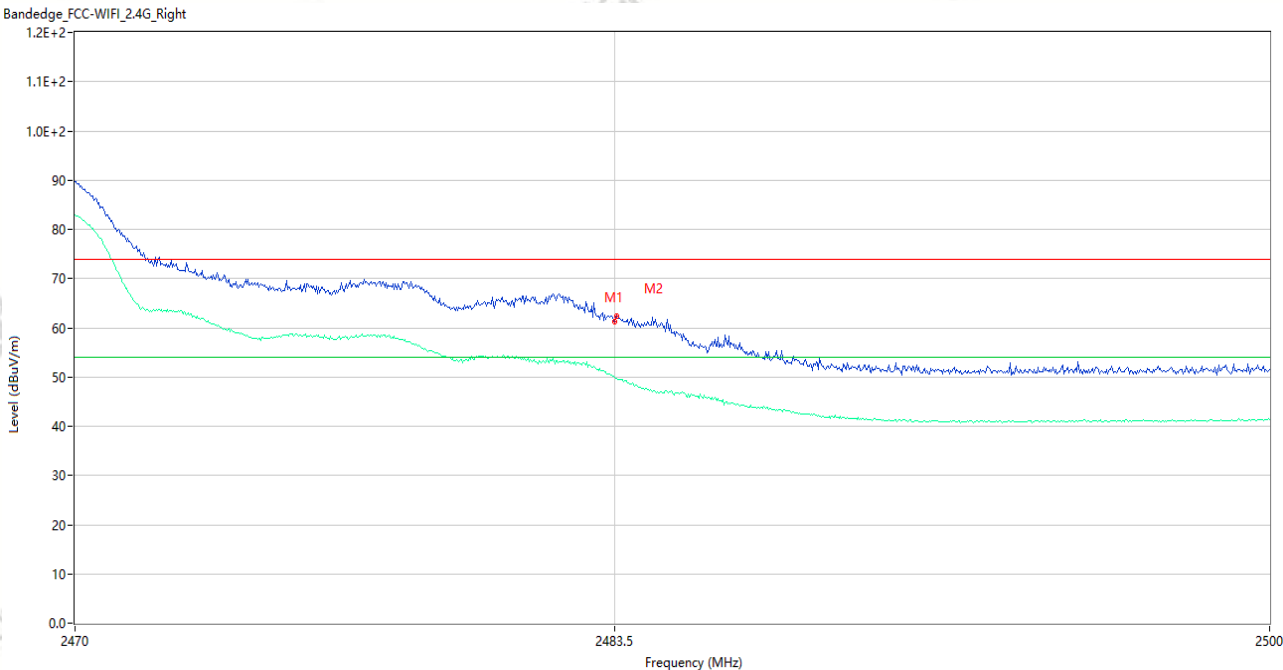

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	61.34	-3.78	74.0	12.66	Peak	360.00	150	Vertical	Pass
1**	2483.500	50.04	-3.78	54.0	3.96	AV	360.00	150	Vertical	Pass
2	2483.560	62.47	-3.78	74.0	11.53	Peak	360.00	150	Vertical	Pass
2**	2483.560	49.75	-3.78	54.0	4.25	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694
Test Time: 2026-08-02_17.58.19

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11g CH11 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	60.72	-3.78	74.0	13.28	Peak	75.00	150	Horizontal	Pass
1**	2483.500	49.94	-3.78	54.0	4.06	AV	75.00	150	Horizontal	Pass
2	2483.560	61.60	-3.78	74.0	12.40	Peak	95.00	150	Horizontal	Pass
2**	2483.560	49.44	-3.78	54.0	4.56	AV	95.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_15.25.39

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n20 CH1 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

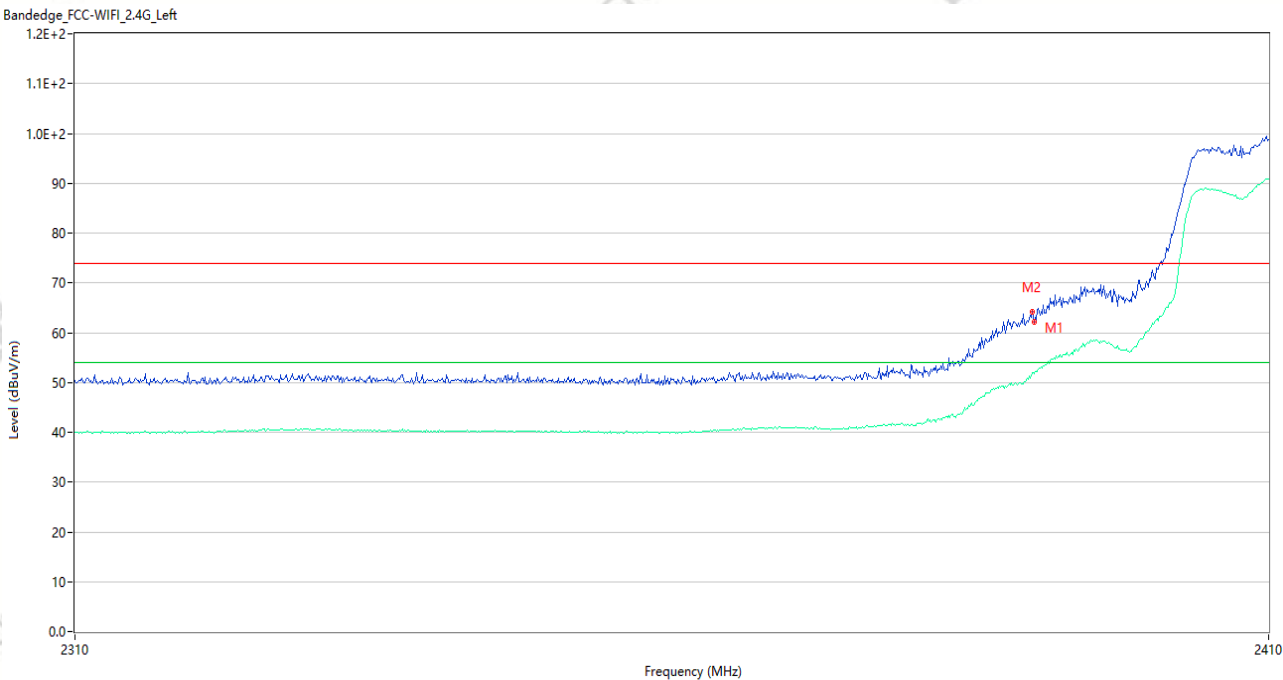


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	62.21	-4.87	74.0	11.79	Peak	320.99	150	Vertical	Pass
1**	2390.000	51.78	-4.87	54.0	2.22	AV	320.99	150	Vertical	Pass
2	2389.900	64.13	-4.87	74.0	9.87	Peak	312.00	150	Vertical	Pass
2**	2389.900	51.89	-4.87	54.0	2.11	AV	312.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_15.23.25

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n20 CH1 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

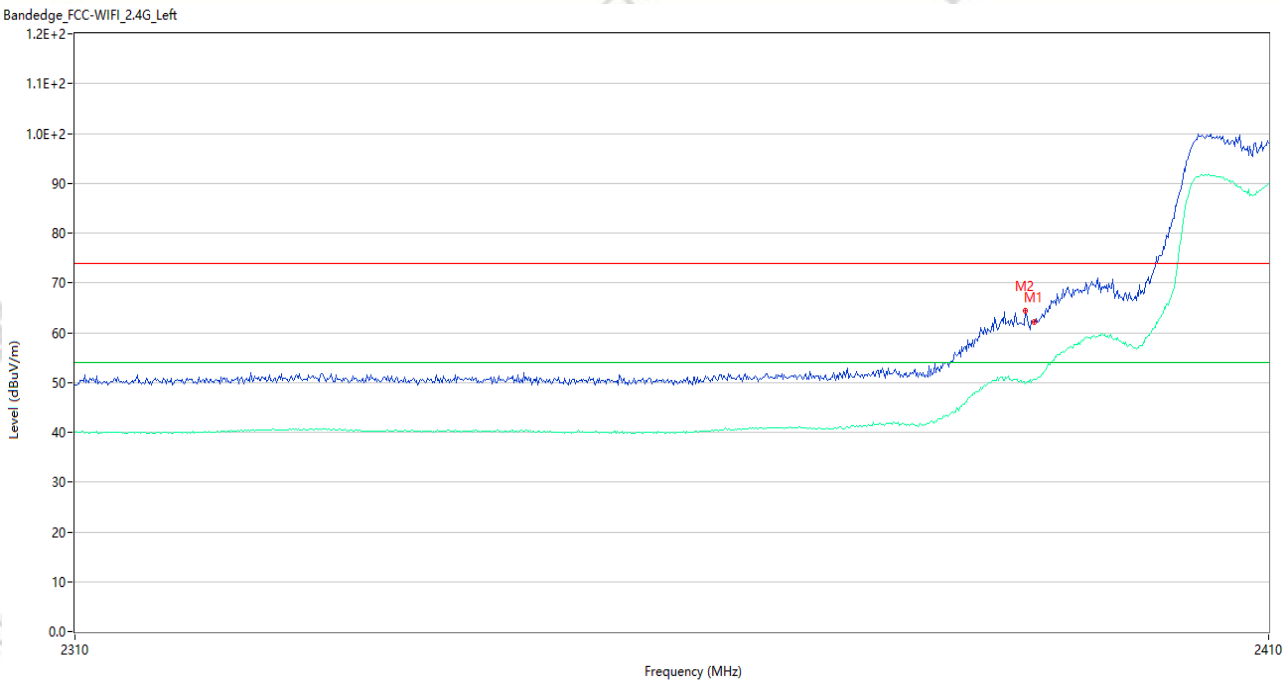


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	62.10	-4.87	74.0	11.90	Peak	176.00	150	Horizontal	Pass
1**	2390.000	50.67	-4.87	54.0	3.33	AV	176.00	150	Horizontal	Pass
2	2389.300	64.30	-4.84	74.0	9.70	Peak	323.00	150	Horizontal	Pass
2**	2389.300	49.75	-4.84	54.0	4.25	AV	323.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_17.35.33

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n20 CH11 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

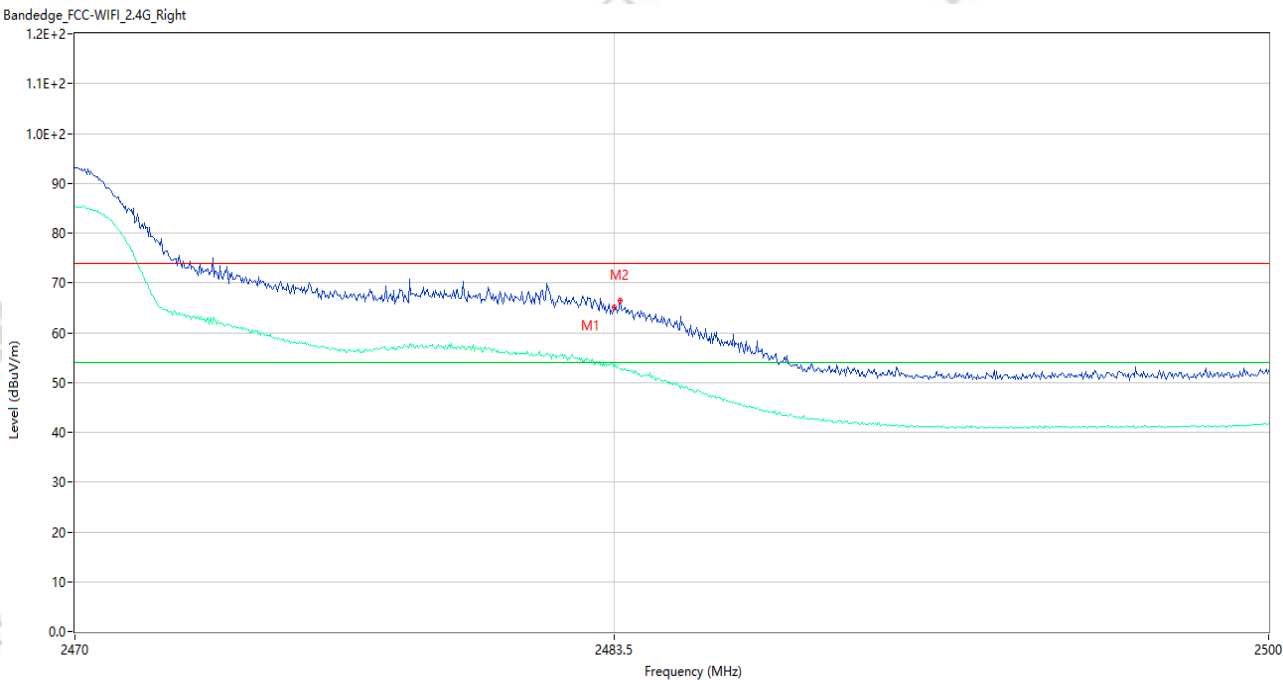


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	64.99	-3.78	74.0	9.01	Peak	0.00	150	Vertical	Pass
1**	2483.500	53.06	-3.78	54.0	0.94	AV	0.00	150	Vertical	Pass
2	2483.650	66.34	-3.78	74.0	7.66	Peak	15.00	150	Vertical	Pass
2**	2483.650	52.57	-3.78	54.0	1.43	AV	15.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694
Test Time: 2026-08-02_17.38.19

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n20 CH11 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

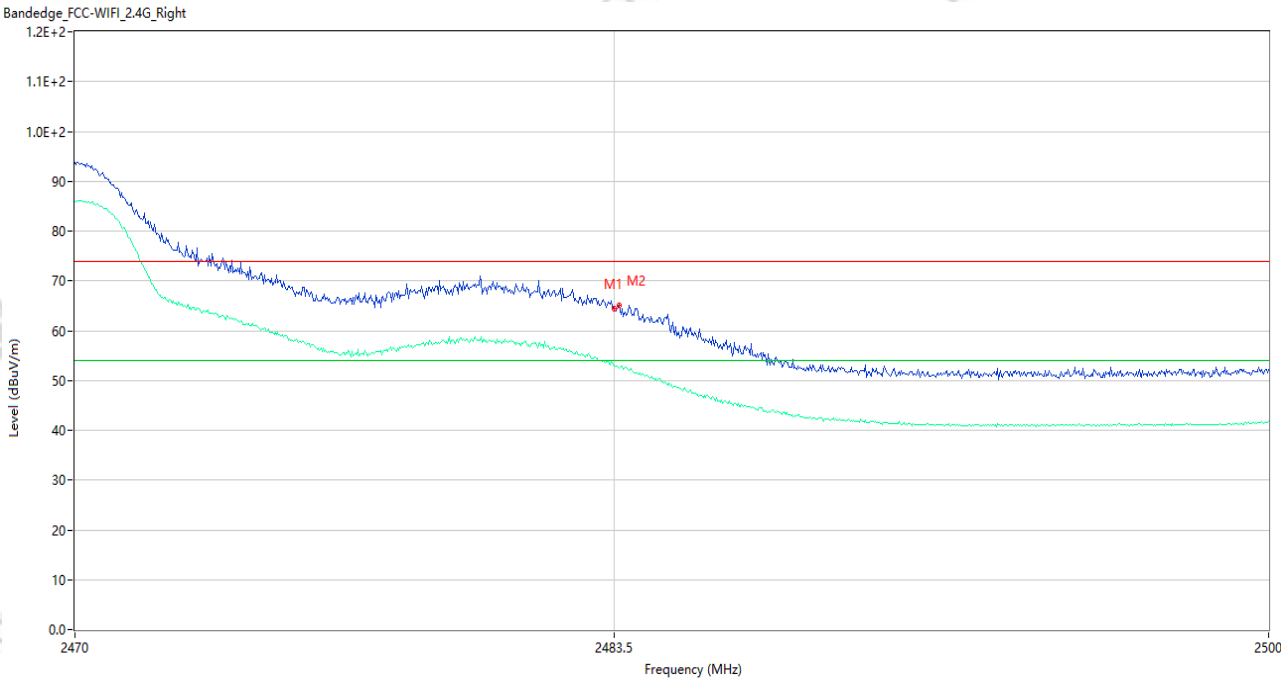


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	64.45	-3.78	74.0	9.55	Peak	44.00	150	Horizontal	Pass
1**	2483.500	52.97	-3.78	54.0	1.03	AV	44.00	150	Horizontal	Pass
2	2483.620	64.98	-3.78	74.0	9.02	Peak	52.00	150	Horizontal	Pass
2**	2483.620	52.48	-3.78	54.0	1.52	AV	52.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_15.54.38

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n40 CH3 P=14.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

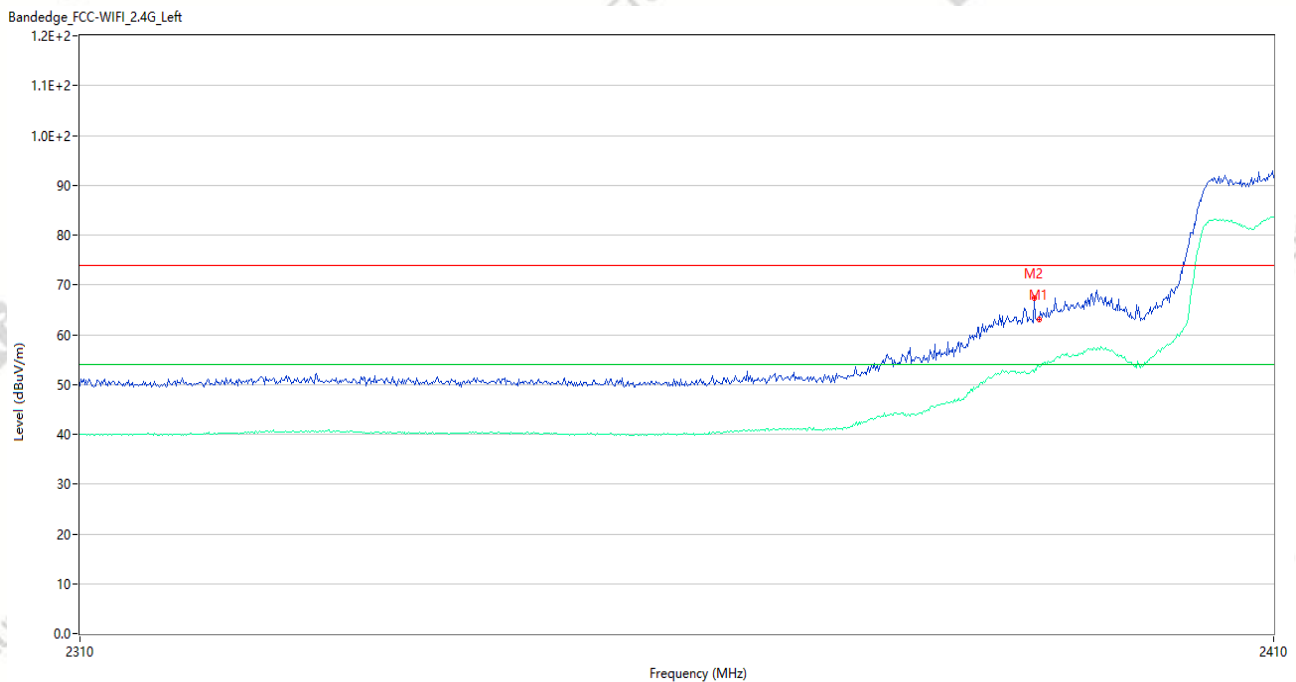


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	63.13	-4.87	74.0	10.87	Peak	321.00	150	Vertical	Pass
1**	2390.000	53.55	-4.87	54.0	0.45	AV	321.00	150	Vertical	Pass
2	2389.600	67.33	-4.85	74.0	6.67	Peak	321.00	150	Vertical	Pass
2**	2389.600	52.43	-4.85	54.0	1.57	AV	321.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_15.52.14

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n40 CH3 P=14.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

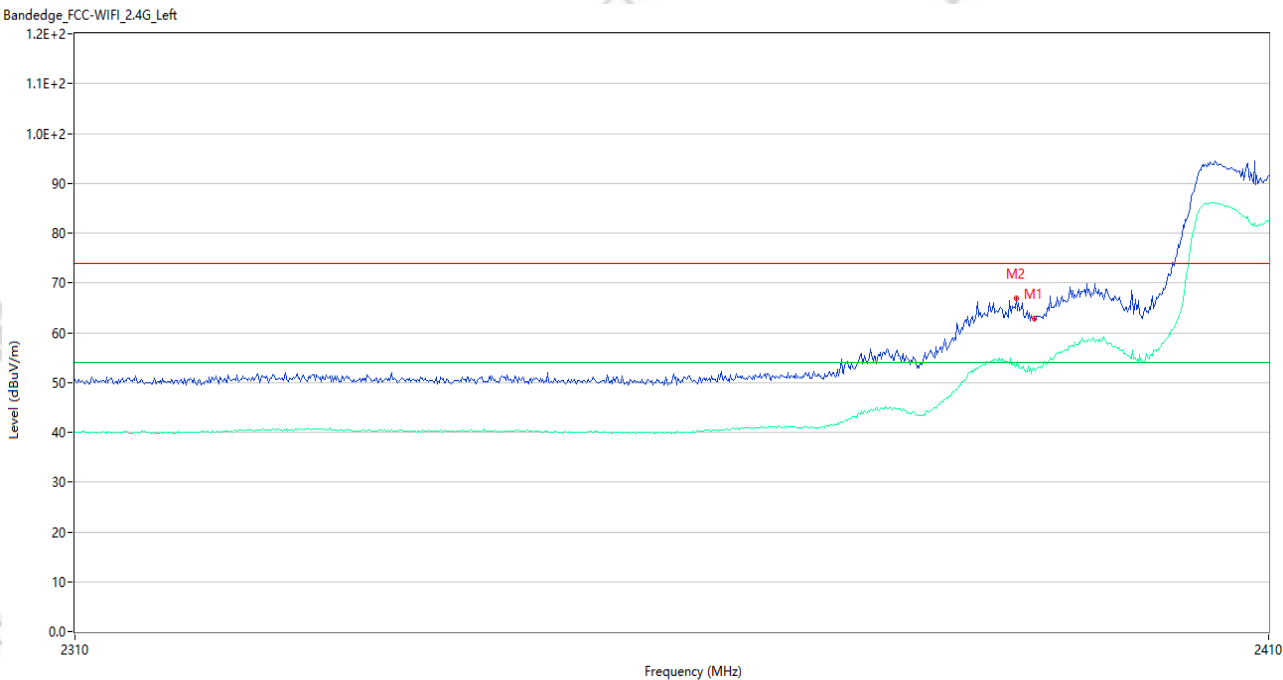


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	62.84	-4.87	74.0	11.16	Peak	59.06	150	Horizontal	Pass
1**	2390.000	52.86	-4.87	54.0	1.14	AV	59.06	150	Horizontal	Pass
2	2388.500	66.96	-4.79	74.0	7.04	Peak	96.00	150	Horizontal	Pass
2**	2388.500	53.44	-4.79	54.0	0.56	AV	96.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694
Test Time: 2026-08-02_16.56.20

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n40 CH9 P=12.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

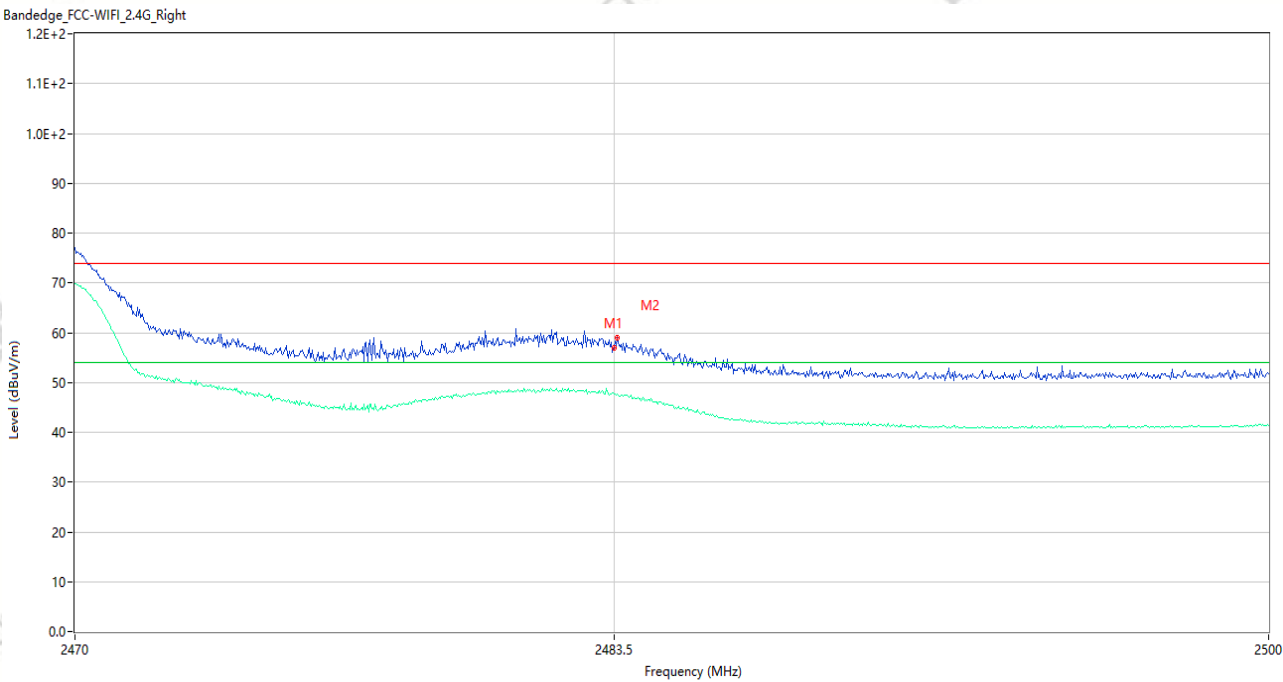


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	56.96	-3.78	74.0	17.04	Peak	101.00	150	Horizontal	Pass
1**	2483.500	47.60	-3.78	54.0	6.40	AV	101.00	150	Horizontal	Pass
2	2483.590	58.99	-3.78	74.0	15.01	Peak	89.00	150	Horizontal	Pass
2**	2483.590	47.58	-3.78	54.0	6.42	AV	89.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694
Test Time: 2026-08-02_16.53.48

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n40 CH9 P=12.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

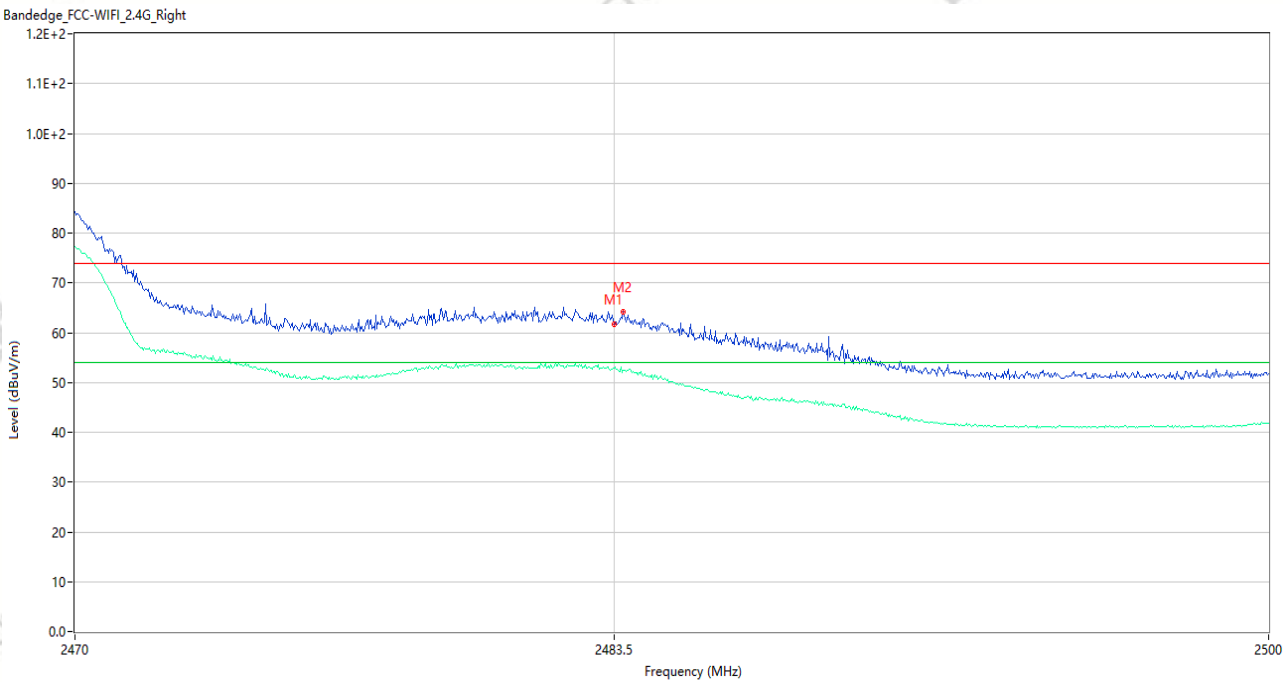


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	61.75	-3.78	74.0	12.25	Peak	0.00	150	Vertical	Pass
1**	2483.500	52.81	-3.78	54.0	1.19	AV	0.00	150	Vertical	Pass
2	2483.740	64.12	-3.78	74.0	9.88	Peak	0.00	150	Vertical	Pass
2**	2483.740	52.42	-3.78	54.0	1.58	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_15.32.30

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11ax20 CH1 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

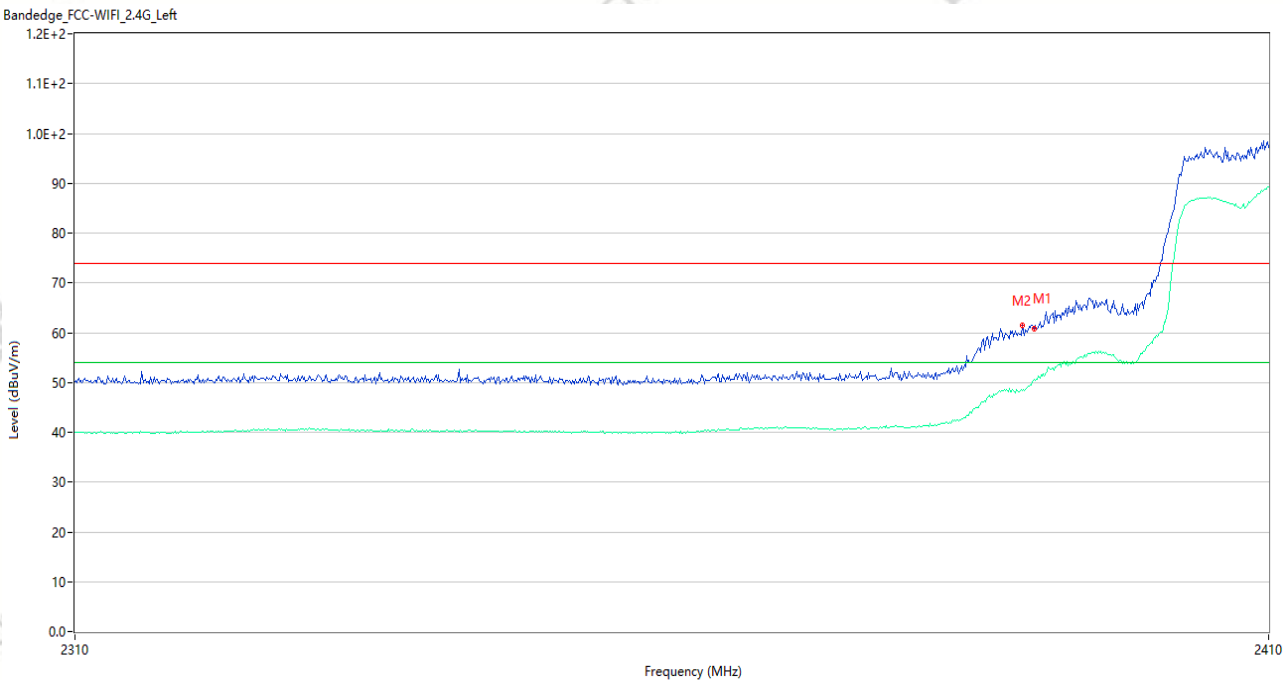


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	60.80	-4.87	74.0	13.20	Peak	314.01	150	Vertical	Pass
1**	2390.000	50.51	-4.87	54.0	3.49	AV	314.01	150	Vertical	Pass
2	2389.000	61.39	-4.82	74.0	12.61	Peak	5.00	150	Vertical	Pass
2**	2389.000	48.35	-4.82	54.0	5.65	AV	5.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_15.34.35

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11ax20 CH1 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

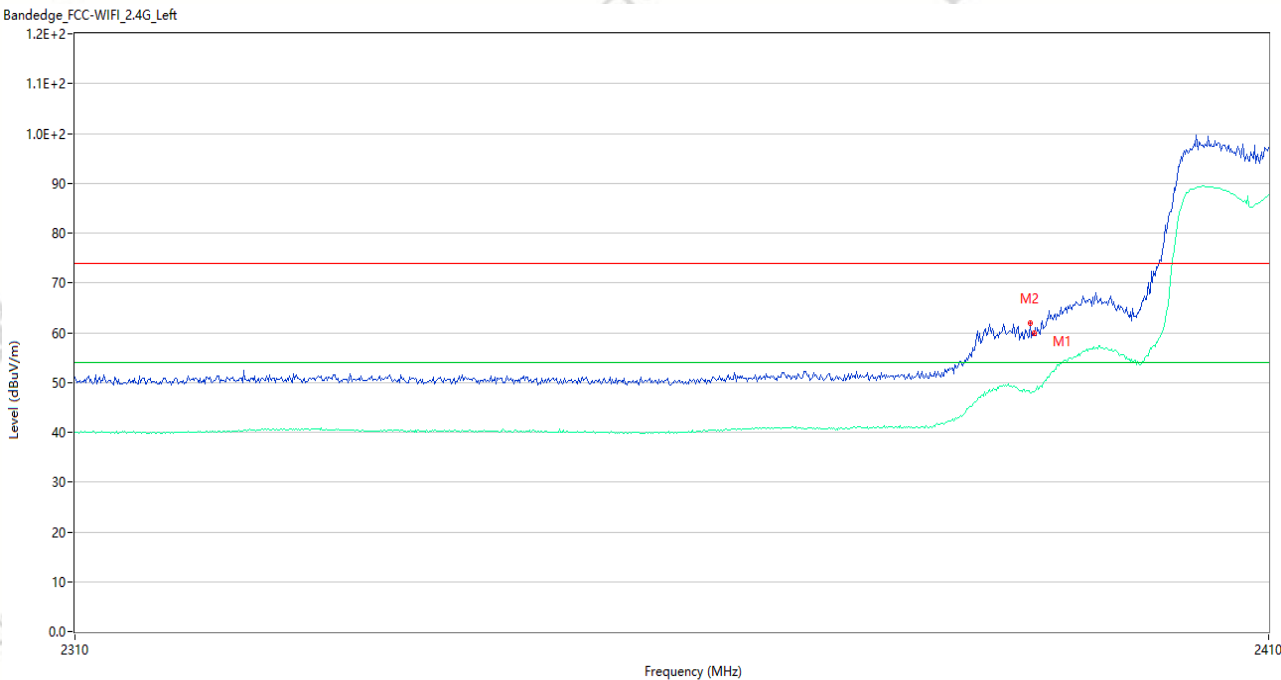


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	59.78	-4.87	74.0	14.22	Peak	49.97	150	Horizontal	Pass
1**	2390.000	48.06	-4.87	54.0	5.94	AV	49.97	150	Horizontal	Pass
2	2389.700	62.02	-4.86	74.0	11.98	Peak	341.00	150	Horizontal	Pass
2**	2389.700	47.99	-4.86	54.0	6.01	AV	341.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_17.18.53

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11ax20 CH11 P=12
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

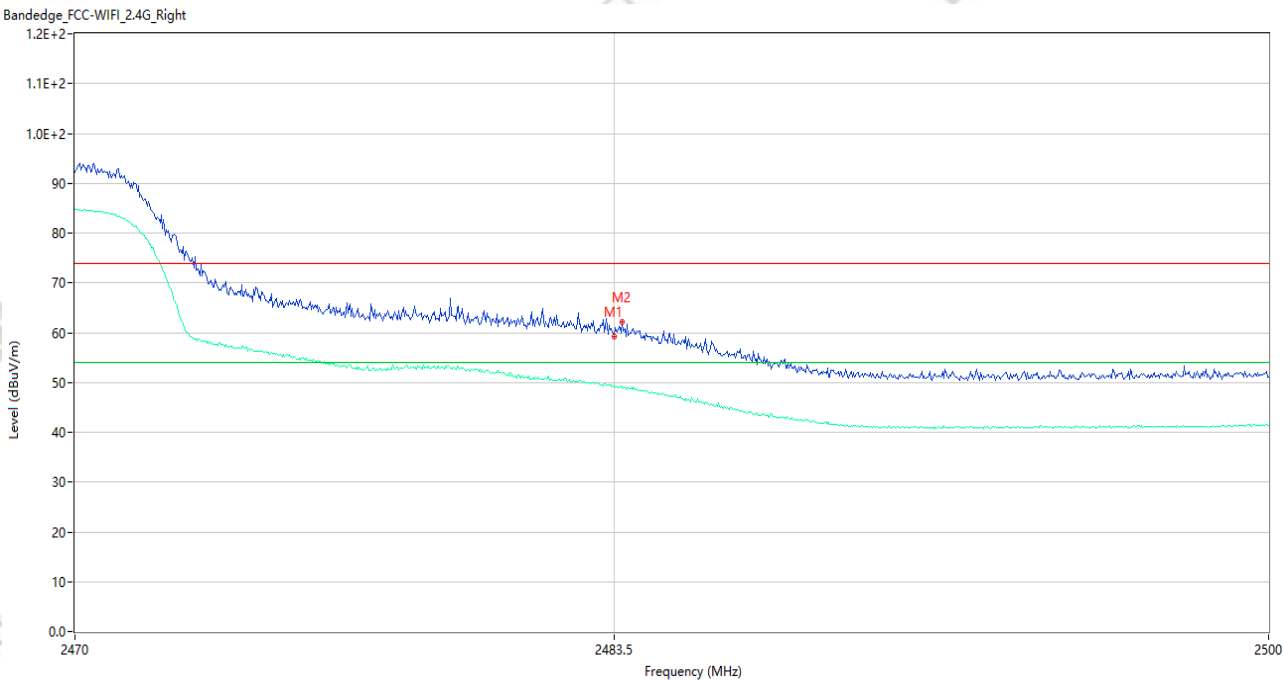


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	59.23	-3.78	74.0	14.77	Peak	360.00	150	Vertical	Pass
1**	2483.500	49.48	-3.78	54.0	4.52	AV	360.00	150	Vertical	Pass
2	2483.710	62.16	-3.78	74.0	11.84	Peak	360.00	150	Vertical	Pass
2**	2483.710	49.19	-3.78	54.0	4.81	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_17.20.55

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11ax20 CH11 P=12
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

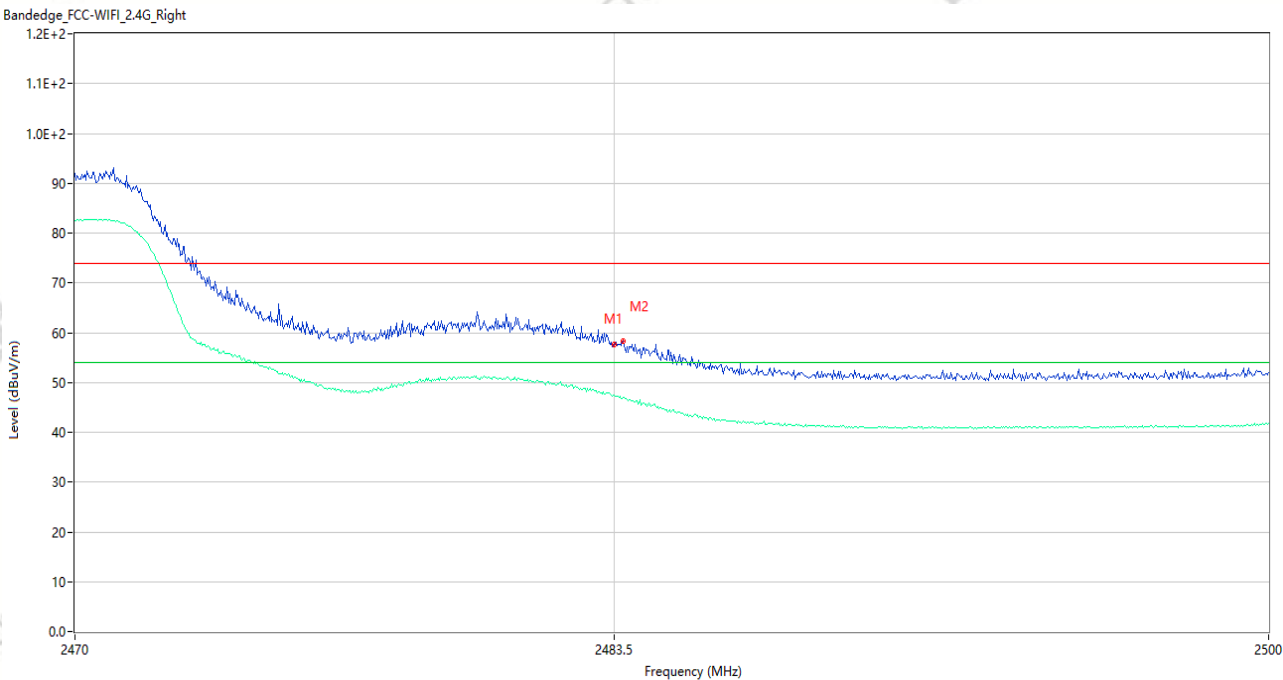


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	57.61	-3.78	74.0	16.39	Peak	99.00	150	Horizontal	Pass
1**	2483.500	47.42	-3.78	54.0	6.58	AV	99.00	150	Horizontal	Pass
2	2483.740	58.38	-3.78	74.0	15.62	Peak	63.00	150	Horizontal	Pass
2**	2483.740	46.98	-3.78	54.0	7.02	AV	63.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694
Test Time: 2026-08-02_16.14.06

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11ax40 CH3 P=11.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

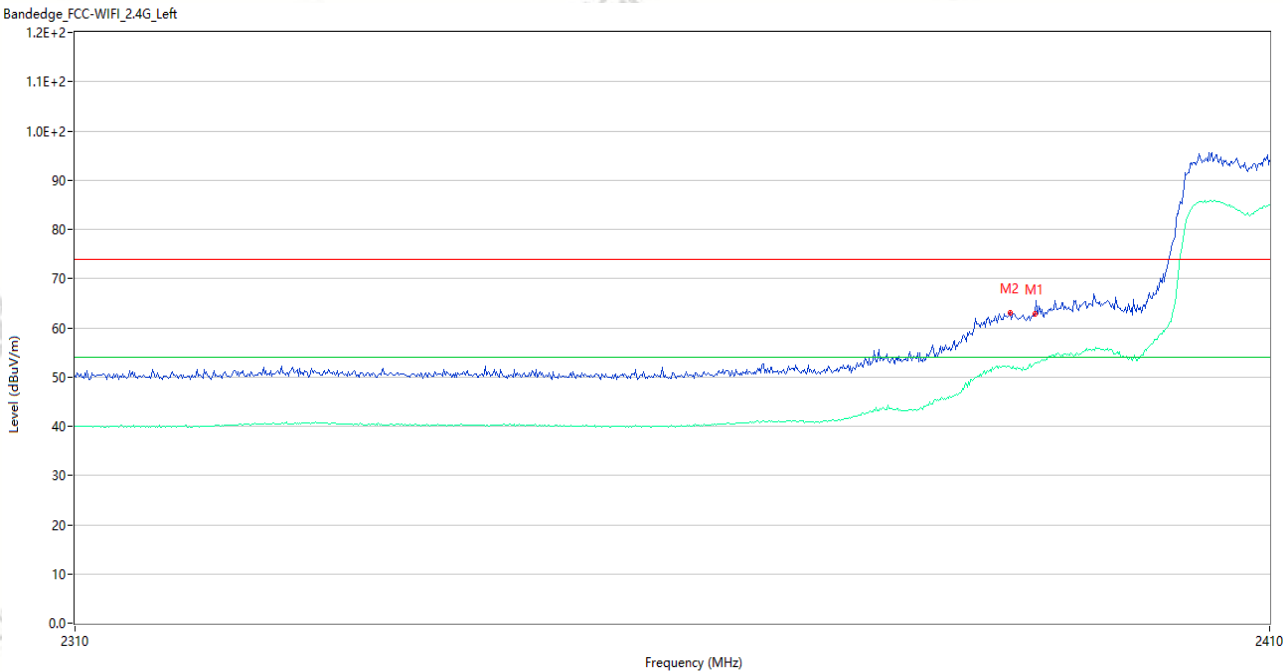


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	62.78	-4.87	74.0	11.22	Peak	1.41	150	Vertical	Pass
1**	2390.000	52.86	-4.87	54.0	1.14	AV	1.41	150	Vertical	Pass
2	2387.900	63.01	-4.76	74.0	10.99	Peak	5.00	150	Vertical	Pass
2**	2387.900	51.92	-4.76	54.0	2.08	AV	5.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_16.15.48

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11ax40 CH3 P=11.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

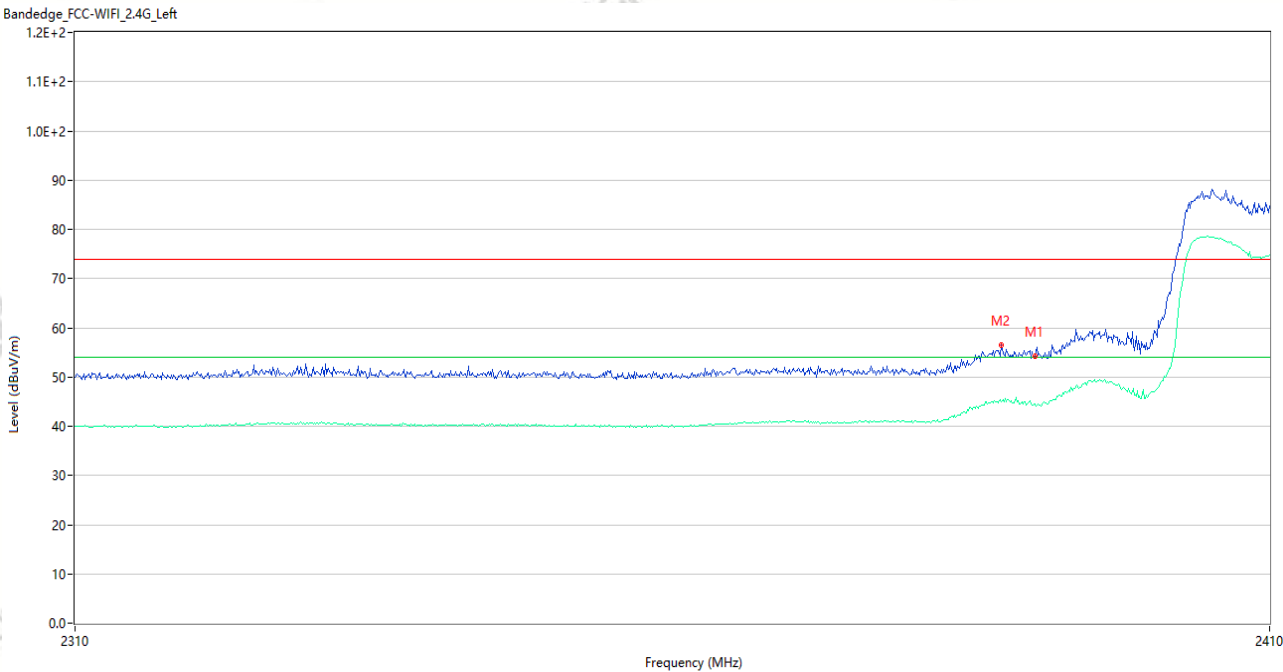


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	54.27	-4.87	74.0	19.73	Peak	86.93	150	Horizontal	Pass
1**	2390.000	44.53	-4.87	54.0	9.47	AV	86.93	150	Horizontal	Pass
2	2387.200	56.54	-4.71	74.0	17.46	Peak	96.00	150	Horizontal	Pass
2**	2387.200	44.98	-4.71	54.0	9.02	AV	96.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_16.36.34

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11ax40 CH9 P=10.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

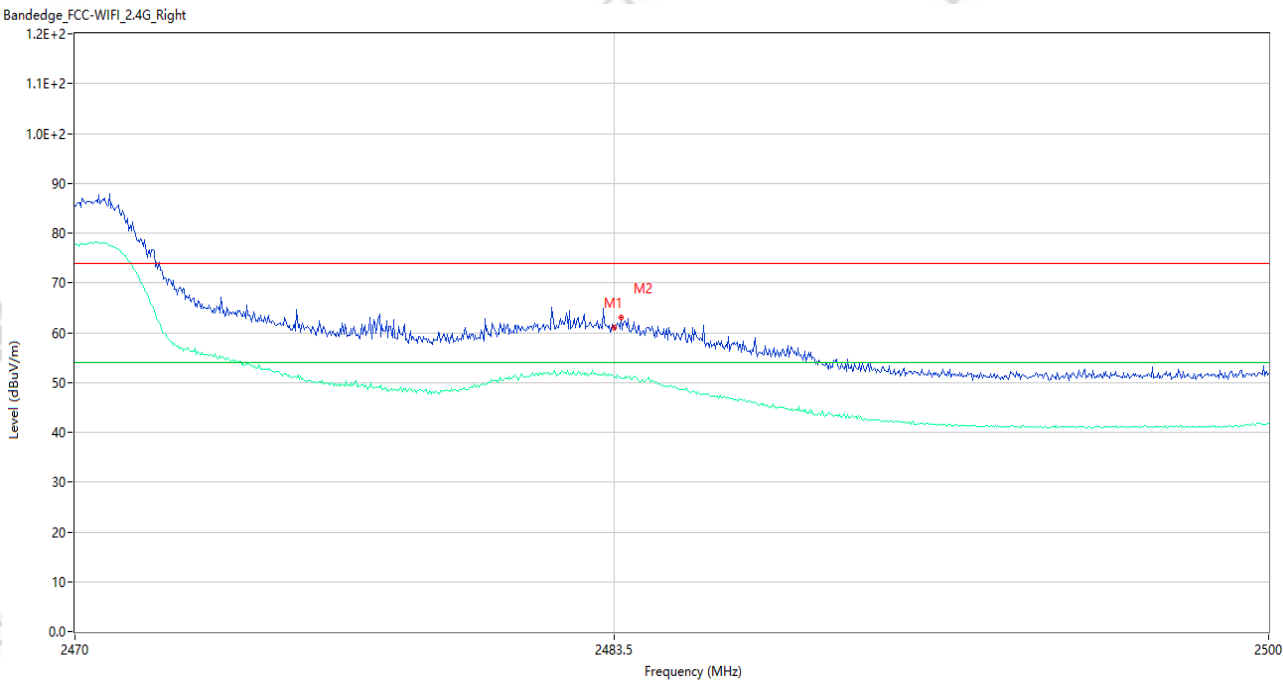


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	61.05	-3.78	74.0	12.95	Peak	0.00	150	Vertical	Pass
1**	2483.500	51.01	-3.78	54.0	2.99	AV	0.00	150	Vertical	Pass
2	2483.680	63.01	-3.78	74.0	10.99	Peak	5.00	150	Vertical	Pass
2**	2483.680	50.75	-3.78	54.0	3.25	AV	5.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694
Test Time: 2026-08-02_16.38.42

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11ax40 CH9 P=10.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

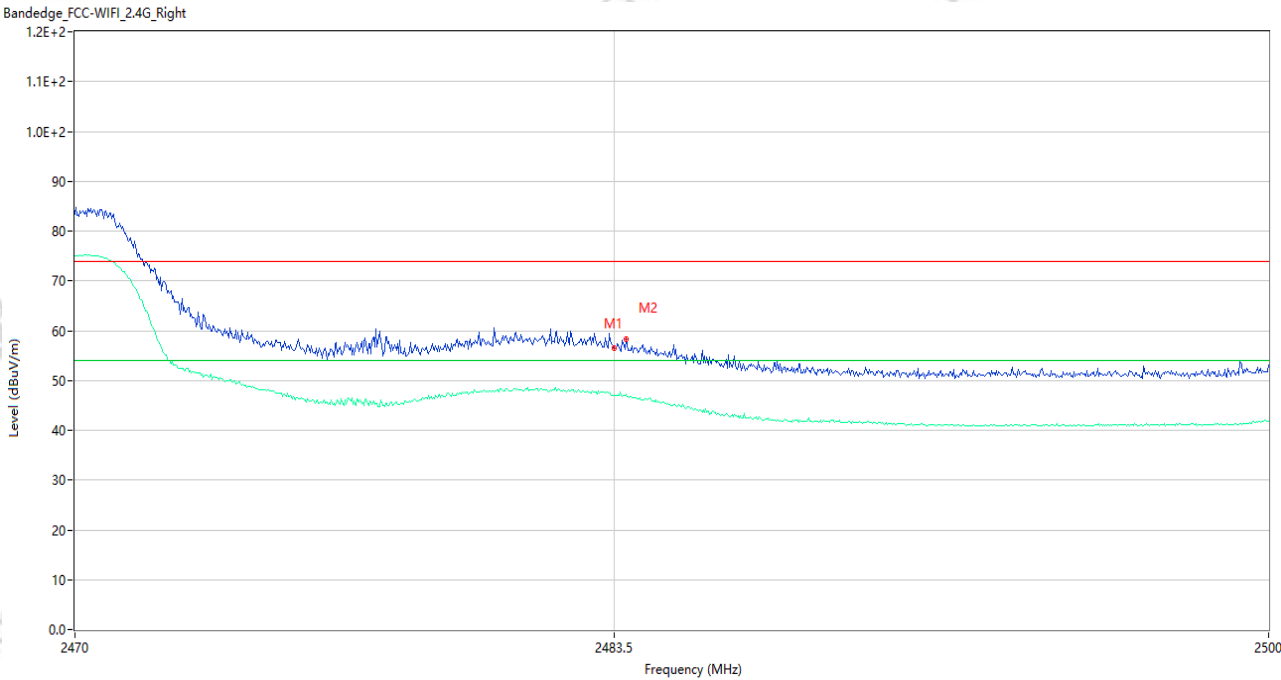

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	56.43	-3.78	74.0	17.57	Peak	95.00	150	Horizontal	Pass
1**	2483.500	47.07	-3.78	54.0	6.93	AV	95.00	150	Horizontal	Pass
2	2483.800	58.38	-3.78	74.0	15.62	Peak	93.00	150	Horizontal	Pass
2**	2483.800	47.14	-3.78	54.0	6.86	AV	93.00	150	Horizontal	Pass