






Modulation	be EHT320	Test Freq. (MHz)	6585																																																																																																																																		
Polarization	Horizontal																																																																																																																																				
Test By :Brad Wu Temperature(°C):25 Humidity(%):62																																																																																																																																					
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>55.71</td><td>68.20</td><td>-12.49</td><td>54.20</td><td>1.51</td><td>Average</td><td>164</td><td>4</td></tr><tr><td>2</td><td>5925.00</td><td>72.64</td><td>88.20</td><td>-15.56</td><td>71.13</td><td>1.51</td><td>Peak</td><td>164</td><td>4</td></tr><tr><td>3 *</td><td>6585.00</td><td>93.40</td><td></td><td></td><td>89.65</td><td>3.75</td><td>Average</td><td>164</td><td>4</td></tr><tr><td>4 *</td><td>6585.00</td><td>106.85</td><td></td><td></td><td>103.10</td><td>3.75</td><td>Peak</td><td>164</td><td>4</td></tr><tr><td>5</td><td>7125.00</td><td>63.71</td><td>68.20</td><td>-4.49</td><td>58.02</td><td>5.69</td><td>Average</td><td>164</td><td>4</td></tr><tr><td>6</td><td>7125.00</td><td>78.38</td><td>88.20</td><td>-9.82</td><td>72.69</td><td>5.69</td><td>Peak</td><td>164</td><td>4</td></tr><tr><td>7</td><td>13170.00</td><td>43.14</td><td>68.20</td><td>-25.06</td><td>35.93</td><td>7.21</td><td>Average</td><td>100</td><td>28</td></tr><tr><td>8</td><td>13170.00</td><td>55.49</td><td>88.20</td><td>-32.71</td><td>48.28</td><td>7.21</td><td>Peak</td><td>100</td><td>28</td></tr><tr><td>9</td><td>19755.00</td><td>41.56</td><td>54.00</td><td>-12.44</td><td>39.48</td><td>2.08</td><td>Average</td><td>100</td><td>12</td></tr><tr><td>10</td><td>19755.00</td><td>53.81</td><td>74.00</td><td>-20.19</td><td>51.73</td><td>2.08</td><td>Peak</td><td>100</td><td>12</td></tr><tr><td>11</td><td>26340.00</td><td>43.55</td><td>68.20</td><td>-24.65</td><td>34.92</td><td>8.63</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>12</td><td>26340.00</td><td>56.48</td><td>88.20</td><td>-31.72</td><td>47.85</td><td>8.63</td><td>Peak</td><td>100</td><td>29</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	55.71	68.20	-12.49	54.20	1.51	Average	164	4	2	5925.00	72.64	88.20	-15.56	71.13	1.51	Peak	164	4	3 *	6585.00	93.40			89.65	3.75	Average	164	4	4 *	6585.00	106.85			103.10	3.75	Peak	164	4	5	7125.00	63.71	68.20	-4.49	58.02	5.69	Average	164	4	6	7125.00	78.38	88.20	-9.82	72.69	5.69	Peak	164	4	7	13170.00	43.14	68.20	-25.06	35.93	7.21	Average	100	28	8	13170.00	55.49	88.20	-32.71	48.28	7.21	Peak	100	28	9	19755.00	41.56	54.00	-12.44	39.48	2.08	Average	100	12	10	19755.00	53.81	74.00	-20.19	51.73	2.08	Peak	100	12	11	26340.00	43.55	68.20	-24.65	34.92	8.63	Average	100	29	12	26340.00	56.48	88.20	-31.72	47.85	8.63	Peak	100	29
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																												
1	5925.00	55.71	68.20	-12.49	54.20	1.51	Average	164	4																																																																																																																												
2	5925.00	72.64	88.20	-15.56	71.13	1.51	Peak	164	4																																																																																																																												
3 *	6585.00	93.40			89.65	3.75	Average	164	4																																																																																																																												
4 *	6585.00	106.85			103.10	3.75	Peak	164	4																																																																																																																												
5	7125.00	63.71	68.20	-4.49	58.02	5.69	Average	164	4																																																																																																																												
6	7125.00	78.38	88.20	-9.82	72.69	5.69	Peak	164	4																																																																																																																												
7	13170.00	43.14	68.20	-25.06	35.93	7.21	Average	100	28																																																																																																																												
8	13170.00	55.49	88.20	-32.71	48.28	7.21	Peak	100	28																																																																																																																												
9	19755.00	41.56	54.00	-12.44	39.48	2.08	Average	100	12																																																																																																																												
10	19755.00	53.81	74.00	-20.19	51.73	2.08	Peak	100	12																																																																																																																												
11	26340.00	43.55	68.20	-24.65	34.92	8.63	Average	100	29																																																																																																																												
12	26340.00	56.48	88.20	-31.72	47.85	8.63	Peak	100	29																																																																																																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																																					

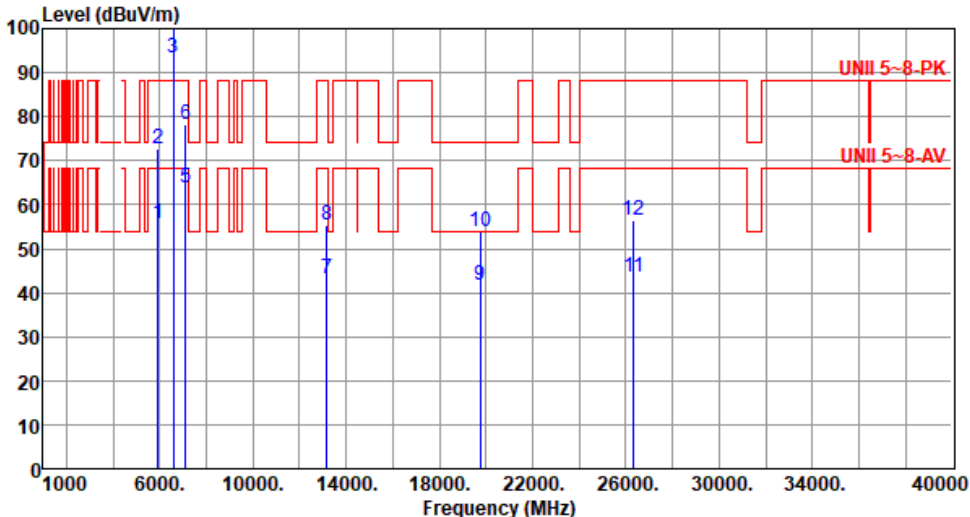

Modulation	be EHT320	Test Freq. (MHz)	6585																																																																																																																																			
Polarization	Vertical																																																																																																																																					
Test By :Brad Wu Temperature(°C):25 Humidity(%):62																																																																																																																																						
																																																																																																																																						
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>53.11</td><td>68.20</td><td>-15.09</td><td>51.60</td><td>1.51</td><td>Average</td><td>181</td><td>345</td></tr><tr><td>2</td><td>5925.00</td><td>72.19</td><td>88.20</td><td>-16.01</td><td>70.68</td><td>1.51</td><td>Peak</td><td>181</td><td>345</td></tr><tr><td>3 *</td><td>6585.00</td><td>92.50</td><td></td><td></td><td>88.75</td><td>3.75</td><td>Average</td><td>181</td><td>345</td></tr><tr><td>4 *</td><td>6585.00</td><td>105.57</td><td></td><td></td><td>101.82</td><td>3.75</td><td>Peak</td><td>181</td><td>345</td></tr><tr><td>5</td><td>7125.00</td><td>61.24</td><td>68.20</td><td>-6.96</td><td>55.55</td><td>5.69</td><td>Average</td><td>181</td><td>345</td></tr><tr><td>6</td><td>7125.00</td><td>78.03</td><td>88.20</td><td>-10.17</td><td>72.34</td><td>5.69</td><td>Peak</td><td>181</td><td>345</td></tr><tr><td>7</td><td>13170.00</td><td>43.25</td><td>68.20</td><td>-24.95</td><td>36.04</td><td>7.21</td><td>Average</td><td>100</td><td>33</td></tr><tr><td>8</td><td>13170.00</td><td>55.61</td><td>88.20</td><td>-32.59</td><td>48.40</td><td>7.21</td><td>Peak</td><td>100</td><td>33</td></tr><tr><td>9</td><td>19755.00</td><td>41.49</td><td>54.00</td><td>-12.51</td><td>39.41</td><td>2.08</td><td>Average</td><td>100</td><td>24</td></tr><tr><td>10</td><td>19755.00</td><td>53.75</td><td>74.00</td><td>-20.25</td><td>51.67</td><td>2.08</td><td>Peak</td><td>100</td><td>24</td></tr><tr><td>11</td><td>26340.00</td><td>43.48</td><td>68.20</td><td>-24.72</td><td>34.85</td><td>8.63</td><td>Average</td><td>100</td><td>17</td></tr><tr><td>12</td><td>26340.00</td><td>56.41</td><td>88.20</td><td>-31.79</td><td>47.78</td><td>8.63</td><td>Peak</td><td>100</td><td>17</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	53.11	68.20	-15.09	51.60	1.51	Average	181	345	2	5925.00	72.19	88.20	-16.01	70.68	1.51	Peak	181	345	3 *	6585.00	92.50			88.75	3.75	Average	181	345	4 *	6585.00	105.57			101.82	3.75	Peak	181	345	5	7125.00	61.24	68.20	-6.96	55.55	5.69	Average	181	345	6	7125.00	78.03	88.20	-10.17	72.34	5.69	Peak	181	345	7	13170.00	43.25	68.20	-24.95	36.04	7.21	Average	100	33	8	13170.00	55.61	88.20	-32.59	48.40	7.21	Peak	100	33	9	19755.00	41.49	54.00	-12.51	39.41	2.08	Average	100	24	10	19755.00	53.75	74.00	-20.25	51.67	2.08	Peak	100	24	11	26340.00	43.48	68.20	-24.72	34.85	8.63	Average	100	17	12	26340.00	56.41	88.20	-31.79	47.78	8.63	Peak	100	17			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																													
1	5925.00	53.11	68.20	-15.09	51.60	1.51	Average	181	345																																																																																																																													
2	5925.00	72.19	88.20	-16.01	70.68	1.51	Peak	181	345																																																																																																																													
3 *	6585.00	92.50			88.75	3.75	Average	181	345																																																																																																																													
4 *	6585.00	105.57			101.82	3.75	Peak	181	345																																																																																																																													
5	7125.00	61.24	68.20	-6.96	55.55	5.69	Average	181	345																																																																																																																													
6	7125.00	78.03	88.20	-10.17	72.34	5.69	Peak	181	345																																																																																																																													
7	13170.00	43.25	68.20	-24.95	36.04	7.21	Average	100	33																																																																																																																													
8	13170.00	55.61	88.20	-32.59	48.40	7.21	Peak	100	33																																																																																																																													
9	19755.00	41.49	54.00	-12.51	39.41	2.08	Average	100	24																																																																																																																													
10	19755.00	53.75	74.00	-20.25	51.67	2.08	Peak	100	24																																																																																																																													
11	26340.00	43.48	68.20	-24.72	34.85	8.63	Average	100	17																																																																																																																													
12	26340.00	56.41	88.20	-31.79	47.78	8.63	Peak	100	17																																																																																																																													
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																																																						

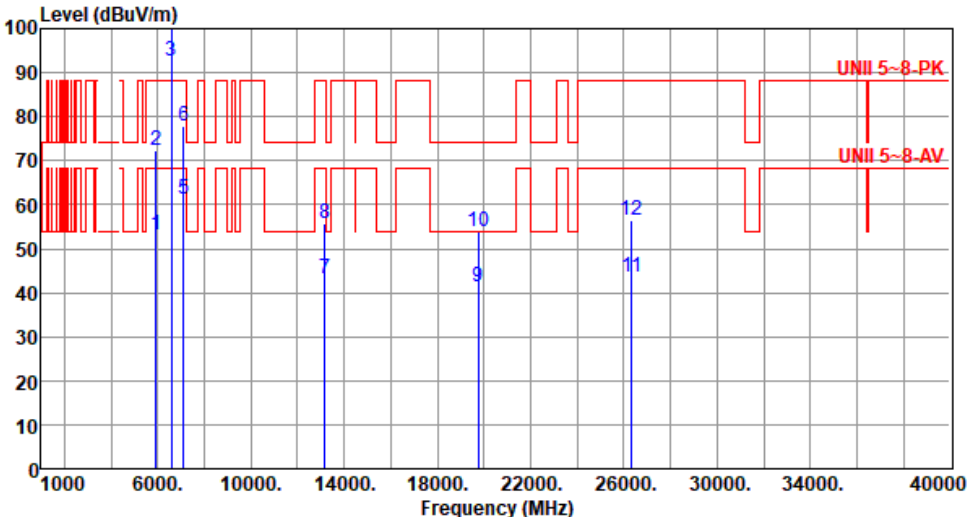

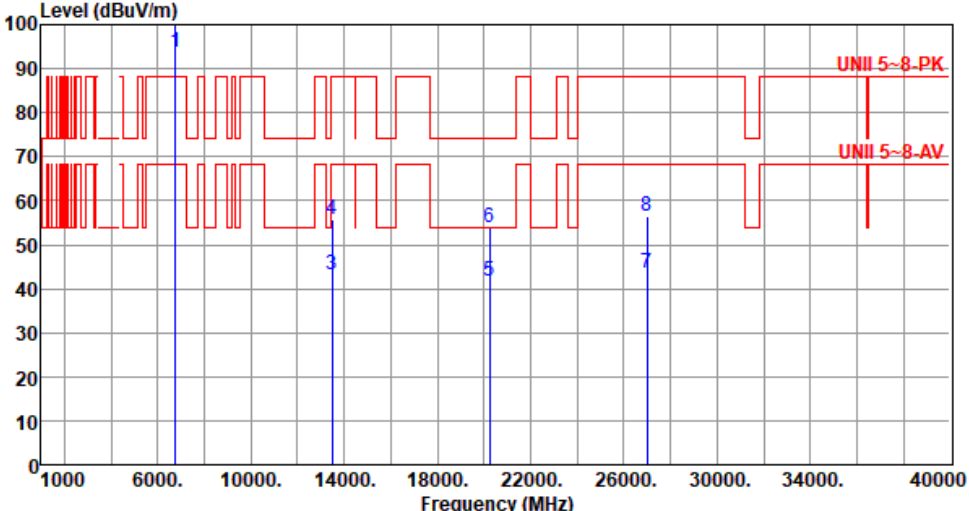Modulation	be EHT320	Test Freq. (MHz)	6745						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6745.00	93.62			89.94	3.68	Average	166	11
2 *	6745.00	107.04			103.36	3.68	Peak	166	11
3	13490.00	43.29	68.20	-24.91	35.78	7.51	Average	100	22
4	13490.00	55.64	88.20	-32.56	48.13	7.51	Peak	100	22
5	20235.00	41.68	54.00	-12.32	39.14	2.54	Average	100	45
6	20235.00	53.92	74.00	-20.08	51.38	2.54	Peak	100	45
7	26980.00	43.68	68.20	-24.52	34.89	8.79	Average	100	14
8	26980.00	56.55	88.20	-31.65	47.76	8.79	Peak	100	14

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT320		Test Freq. (MHz)		6745				
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1	*	6745.00	92.66		88.98	3.68	Average	179	338
2	*	6745.00	105.75		102.07	3.68	Peak	179	338
3		13490.00	43.42	68.20 -24.78	35.91	7.51	Average	100	44
4		13490.00	55.74	88.20 -32.46	48.23	7.51	Peak	100	44
5		20235.00	41.62	54.00 -12.38	39.08	2.54	Average	100	19
6		20235.00	53.88	74.00 -20.12	51.34	2.54	Peak	100	19
7		26980.00	43.56	68.20 -24.64	34.77	8.79	Average	100	25
8		26980.00	56.62	88.20 -31.58	47.83	8.79	Peak	100	25
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									



Modulation	be EHT320	Test Freq. (MHz)	5905
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) <			



Modulation	be EHT320	Test Freq. (MHz)	5905
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) <			

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	Pass	5.96289G	-14.98	5.9662G	-41.02	-35.16	-5.86	3
802.11be EHT40_Nss4,(MCS0)_4TX	Pass	5.98258G	-10.19	5.986G	-36.48	-30.19	-6.29	2
802.11be EHT80_Nss4,(MCS0)_4TX	Pass	6.02136G	-7.98	6.0262G	-31.86	-28.02	-3.84	4
802.11be EHT160_Nss4,(MCS0)_4TX	Pass	6.11867G	-5.52	6.5698G	-53.01	-45.52	-7.49	4
802.11be EHT320_Nss4,(MCS0)_4TX	Pass	6.1946G	-1.72	6.7738G	-51.20	-41.72	-9.48	4
6.425-6.525GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	Pass	6.42631G	-14.36	6.424G	-40.26	-34.36	-5.90	4
802.11be EHT40_Nss4,(MCS0)_4TX	Pass	6.45299G	-10.55	6.424G	-36.72	-30.55	-6.17	1
802.11be EHT80_Nss4,(MCS0)_4TX	Pass	6.48138G	-6.93	6.4238G	-30.88	-26.97	-3.91	3
802.11be EHT160_Nss4,(MCS0)_4TX	Pass	6.46904G	-4.71	6.8882G	-52.95	-44.71	-8.24	4
802.11be EHT320_Nss4,(MCS0)_4TX	Pass	6.5594G	-1.19	6.0746G	-49.95	-41.19	-8.76	4
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	Pass	6.70621G	-14.26	6.7261G	-39.78	-34.35	-5.43	3
802.11be EHT40_Nss4,(MCS0)_4TX	Pass	6.71221G	-10.57	6.704G	-36.59	-30.57	-6.02	1
802.11be EHT80_Nss4,(MCS0)_4TX	Pass	6.58744G	-7.51	6.5838G	-31.41	-27.55	-3.86	4
802.11be EHT160_Nss4,(MCS0)_4TX	Pass	6.59227G	-4.27	6.9354G	-52.94	-44.27	-8.67	4
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	Pass	7.08821G	-14.67	7.084G	-41.03	-34.67	-6.36	1
802.11be EHT40_Nss4,(MCS0)_4TX	Pass	6.90682G	-10.73	6.904G	-36.79	-30.73	-6.06	1
802.11be EHT80_Nss4,(MCS0)_4TX	Pass	6.83623G	-7.57	6.8238G	-31.40	-27.61	-3.79	3
802.11be EHT160_Nss4,(MCS0)_4TX	Pass	6.81301G	-5.22	6.4402G	-53.37	-45.22	-8.15	4
802.11be EHT320_Nss4,(MCS0)_4TX	Pass	6.7498G	-1.23	6.3978G	-48.75	-41.23	-7.52	2

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5935MHz	Pass	5.94319G	-17.68	5.946G	-44.44	-37.68	-6.76	1
5935MHz	Pass	5.94389G	-17.07	5.946G	-43.30	-37.07	-6.23	2
5935MHz	Pass	5.94419G	-17.63	5.946G	-44.59	-37.63	-6.96	3
5935MHz	Pass	5.94389G	-17.74	5.946G	-44.34	-37.74	-6.60	4
5955MHz	Pass	5.96339G	-15.35	5.9661G	-42.44	-35.44	-7.00	1
5955MHz	Pass	5.96429G	-14.60	5.966G	-41.68	-34.60	-7.08	2
5955MHz	Pass	5.96289G	-14.98	5.9662G	-41.02	-35.16	-5.86	3
5955MHz	Pass	5.96359G	-15.38	5.966G	-41.95	-35.38	-6.57	4
6175MHz	Pass	6.16801G	-14.91	6.164G	-41.34	-34.91	-6.43	1
6175MHz	Pass	6.16731G	-14.03	6.186G	-40.69	-34.03	-6.66	2
6175MHz	Pass	6.16671G	-14.37	6.164G	-41.60	-34.37	-7.23	3
6175MHz	Pass	6.16591G	-14.29	6.164G	-41.24	-34.29	-6.95	4
6415MHz	Pass	6.42399G	-15.56	6.426G	-42.49	-35.56	-6.93	1
6415MHz	Pass	6.42249G	-14.90	6.426G	-41.85	-34.90	-6.95	2
6415MHz	Pass	6.42379G	-15.14	6.426G	-42.08	-35.14	-6.94	3
6415MHz	Pass	6.42339G	-15.07	6.404G	-41.79	-35.07	-6.72	4
6435MHz	Pass	6.44409G	-14.79	6.424G	-41.38	-34.79	-6.59	1
6435MHz	Pass	6.42651G	-14.28	6.424G	-41.48	-34.28	-7.20	2
6435MHz	Pass	6.44249G	-14.59	6.446G	-41.50	-34.59	-6.91	3
6435MHz	Pass	6.42631G	-14.36	6.424G	-40.26	-34.36	-5.90	4
6475MHz	Pass	6.48389G	-14.20	6.464G	-41.11	-34.20	-6.91	1
6475MHz	Pass	6.46581G	-13.83	6.486G	-40.71	-33.83	-6.88	2
6475MHz	Pass	6.46681G	-14.16	6.4861G	-41.38	-34.25	-7.13	3
6475MHz	Pass	6.46671G	-14.06	6.464G	-40.79	-34.06	-6.73	4
6515MHz	Pass	6.50641G	-14.21	6.526G	-40.98	-34.21	-6.77	1
6515MHz	Pass	6.52339G	-13.90	6.526G	-40.53	-33.90	-6.63	2
6515MHz	Pass	6.52359G	-14.21	6.504G	-41.21	-34.21	-7.00	3
6515MHz	Pass	6.52359G	-14.19	6.504G	-40.57	-34.19	-6.38	4
6535MHz	Pass	6.52621G	-14.21	6.524G	-41.19	-34.21	-6.98	1
6535MHz	Pass	6.52901G	-13.90	6.546G	-40.07	-33.90	-6.17	2
6535MHz	Pass	6.52671G	-14.28	6.524G	-41.30	-34.28	-7.02	3
6535MHz	Pass	6.52741G	-14.30	6.524G	-41.44	-34.30	-7.14	4
6715MHz	Pass	6.70621G	-13.96	6.726G	-41.03	-33.96	-7.07	1
6715MHz	Pass	6.72259G	-13.83	6.704G	-40.79	-33.83	-6.96	2
6715MHz	Pass	6.70621G	-14.26	6.7261G	-39.78	-34.35	-5.43	3
6715MHz	Pass	6.70751G	-13.92	6.726G	-41.06	-33.92	-7.14	4
6855MHz	Pass	6.84871G	-14.37	6.866G	-41.01	-34.37	-6.64	1
6855MHz	Pass	6.84991G	-13.99	6.866G	-40.96	-33.99	-6.97	2
6855MHz	Pass	6.84611G	-14.11	6.844G	-41.26	-34.11	-7.15	3
6855MHz	Pass	6.86349G	-14.33	6.844G	-40.51	-34.33	-6.18	4
6875MHz Straddle 6.875-7.125GHz	Pass	6.86881G	-14.40	6.864G	-40.91	-34.40	-6.51	1

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6875MHz Straddle 6.875-7.125GHz	Pass	6.86571G	-14.11	6.886G	-41.22	-34.11	-7.11	2
6875MHz Straddle 6.875-7.125GHz	Pass	6.88309G	-14.14	6.864G	-41.20	-34.14	-7.06	3
6875MHz Straddle 6.875-7.125GHz	Pass	6.86861G	-14.12	6.864G	-41.33	-34.12	-7.21	4
6895MHz	Pass	6.88681G	-14.13	6.884G	-40.63	-34.13	-6.50	1
6895MHz	Pass	6.88891G	-14.07	6.884G	-41.61	-34.07	-7.54	2
6895MHz	Pass	6.90379G	-14.12	6.8839G	-41.32	-34.21	-7.11	3
6895MHz	Pass	6.88621G	-14.00	6.906G	-40.41	-34.00	-6.41	4
7015MHz	Pass	7.00611G	-14.72	7.004G	-41.66	-34.72	-6.94	1
7015MHz	Pass	7.02409G	-14.26	7.026G	-40.72	-34.26	-6.46	2
7015MHz	Pass	7.00621G	-14.44	7.004G	-41.38	-34.44	-6.94	3
7015MHz	Pass	7.0101G	-14.38	7.004G	-41.28	-34.38	-6.90	4
7095MHz	Pass	7.08821G	-14.67	7.084G	-41.03	-34.67	-6.36	1
7095MHz	Pass	7.08871G	-14.47	7.106G	-41.05	-34.47	-6.58	2
7095MHz	Pass	7.08811G	-14.21	7.084G	-40.86	-34.21	-6.65	3
7095MHz	Pass	7.08741G	-14.47	7.084G	-40.87	-34.47	-6.40	4
7115MHz	Pass	7.10831G	-20.46	7.126G	-47.64	-40.46	-7.18	1
7115MHz	Pass	7.12429G	-20.46	7.126G	-47.62	-40.46	-7.16	2
7115MHz	Pass	7.10871G	-20.40	7.126G	-47.80	-40.40	-7.40	3
7115MHz	Pass	7.12129G	-20.31	7.126G	-47.48	-40.31	-7.17	4
802.11be EHT40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5965MHz	Pass	5.98358G	-11.21	5.986G	-37.64	-31.21	-6.43	1
5965MHz	Pass	5.98258G	-10.19	5.986G	-36.48	-30.19	-6.29	2
5965MHz	Pass	5.98238G	-10.67	5.986G	-37.34	-30.67	-6.67	3
5965MHz	Pass	5.98298G	-10.80	5.986G	-37.29	-30.80	-6.49	4
6165MHz	Pass	6.14742G	-11.50	6.144G	-38.10	-31.50	-6.60	1
6165MHz	Pass	6.14662G	-10.80	6.144G	-37.11	-30.80	-6.31	2
6165MHz	Pass	6.15101G	-11.38	6.144G	-37.88	-31.38	-6.50	3
6165MHz	Pass	6.14842G	-11.05	6.144G	-37.45	-31.05	-6.40	4
6405MHz	Pass	6.38682G	-11.51	6.384G	-38.07	-31.51	-6.56	1
6405MHz	Pass	6.42078G	-10.38	6.426G	-36.69	-30.38	-6.31	2
6405MHz	Pass	6.41379G	-10.88	6.426G	-37.36	-30.88	-6.48	3
6405MHz	Pass	6.4074G	-10.77	6.3838G	-37.50	-30.85	-6.65	4
6445MHz	Pass	6.45299G	-10.55	6.424G	-36.72	-30.55	-6.17	1
6445MHz	Pass	6.45G	-10.08	6.466G	-36.63	-30.08	-6.55	2
6445MHz	Pass	6.42722G	-10.02	6.424G	-36.61	-30.02	-6.59	3
6445MHz	Pass	6.46258G	-10.12	6.466G	-36.47	-30.12	-6.35	4
6485MHz	Pass	6.48G	-10.44	6.5062G	-36.92	-30.52	-6.40	1
6485MHz	Pass	6.46662G	-10.08	6.464G	-36.57	-30.08	-6.49	2
6485MHz	Pass	6.49619G	-9.96	6.506G	-36.65	-29.96	-6.69	3
6485MHz	Pass	6.46742G	-9.94	6.506G	-36.32	-29.94	-6.38	4
6525MHz Straddle 6.425-6.525GHz	Pass	6.50662G	-10.74	6.504G	-37.06	-30.74	-6.32	1
6525MHz Straddle 6.425-6.525GHz	Pass	6.51241G	-10.43	6.504G	-37.15	-30.43	-6.72	2

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6525MHz Straddle 6.425-6.525GHz	Pass	6.50742G	-10.46	6.546G	-36.96	-30.46	-6.50	3
6525MHz Straddle 6.425-6.525GHz	Pass	6.54138G	-10.58	6.504G	-37.03	-30.58	-6.45	4
6565MHz	Pass	6.5688G	-10.86	6.586G	-37.01	-30.86	-6.15	1
6565MHz	Pass	6.55481G	-10.29	6.586G	-36.51	-30.29	-6.22	2
6565MHz	Pass	6.54962G	-10.74	6.544G	-37.42	-30.74	-6.68	3
6565MHz	Pass	6.55021G	-10.58	6.544G	-37.36	-30.58	-6.78	4
6725MHz	Pass	6.71221G	-10.57	6.704G	-36.59	-30.57	-6.02	1
6725MHz	Pass	6.70762G	-10.00	6.704G	-36.44	-30.00	-6.44	2
6725MHz	Pass	6.70662G	-10.59	6.704G	-36.82	-30.59	-6.23	3
6725MHz	Pass	6.73119G	-10.85	6.704G	-37.51	-30.85	-6.66	4
6845MHz	Pass	6.82642G	-10.70	6.824G	-37.04	-30.70	-6.34	1
6845MHz	Pass	6.82762G	-10.33	6.824G	-36.50	-30.33	-6.17	2
6845MHz	Pass	6.82722G	-10.25	6.824G	-36.42	-30.25	-6.17	3
6845MHz	Pass	6.82862G	-10.44	6.866G	-37.12	-30.44	-6.68	4
6885MHz Straddle 6.875-7.125GHz	Pass	6.86702G	-10.65	6.864G	-37.06	-30.65	-6.41	1
6885MHz Straddle 6.875-7.125GHz	Pass	6.86902G	-10.33	6.864G	-37.07	-30.33	-6.74	2
6885MHz Straddle 6.875-7.125GHz	Pass	6.86702G	-10.39	6.864G	-36.50	-30.39	-6.11	3
6885MHz Straddle 6.875-7.125GHz	Pass	6.87261G	-10.64	6.906G	-37.10	-30.64	-6.46	4
6925MHz	Pass	6.90682G	-10.73	6.904G	-36.79	-30.73	-6.06	1
6925MHz	Pass	6.90742G	-10.50	6.904G	-37.17	-30.50	-6.67	2
6925MHz	Pass	6.90682G	-10.62	6.904G	-37.10	-30.62	-6.48	3
6925MHz	Pass	6.90742G	-10.95	6.904G	-37.43	-30.95	-6.48	4
7005MHz	Pass	6.98882G	-9.96	6.984G	-36.50	-29.96	-6.54	1
7005MHz	Pass	6.98862G	-9.99	6.984G	-36.22	-29.99	-6.23	2
7005MHz	Pass	6.98702G	-10.18	6.984G	-36.52	-30.18	-6.34	3
7005MHz	Pass	6.98702G	-10.62	6.984G	-36.99	-30.62	-6.37	4
7085MHz	Pass	7.06822G	-10.41	7.064G	-36.55	-30.41	-6.14	1
7085MHz	Pass	7.07121G	-10.14	7.106G	-36.40	-30.14	-6.26	2
7085MHz	Pass	7.06822G	-9.87	7.064G	-36.31	-29.87	-6.44	3
7085MHz	Pass	7.06782G	-10.27	7.064G	-36.77	-30.27	-6.50	4
802.11be EHT80_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5985MHz	Pass	5.97941G	-8.23	6.0262G	-32.47	-28.27	-4.20	1
5985MHz	Pass	6.00258G	-7.47	6.0262G	-31.57	-27.51	-4.06	2
5985MHz	Pass	5.99059G	-7.87	6.0262G	-32.21	-27.91	-4.30	3
5985MHz	Pass	6.02136G	-7.98	6.0262G	-31.86	-28.02	-3.84	4
6145MHz	Pass	6.11063G	-8.63	6.1034G	-32.88	-28.75	-4.13	1
6145MHz	Pass	6.13381G	-7.71	6.1038G	-31.77	-27.75	-4.02	2
6145MHz	Pass	6.10744G	-8.37	6.1038G	-32.82	-28.41	-4.41	3
6145MHz	Pass	6.13621G	-8.33	6.1038G	-32.73	-28.37	-4.36	4
6385MHz	Pass	6.37141G	-8.68	6.4262G	-32.90	-28.72	-4.18	1
6385MHz	Pass	6.41017G	-7.78	6.3438G	-32.04	-27.82	-4.22	2
6385MHz	Pass	6.41377G	-8.18	6.4262G	-32.37	-28.22	-4.15	3

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6385MHz	Pass	6.39499G	-7.94	6.4262G	-32.02	-27.98	-4.04	4
6465MHz	Pass	6.49817G	-7.94	6.5062G	-32.08	-27.98	-4.10	1
6465MHz	Pass	6.50176G	-7.24	6.4238G	-31.59	-27.28	-4.31	2
6465MHz	Pass	6.48138G	-6.93	6.4238G	-30.88	-26.97	-3.91	3
6465MHz	Pass	6.43023G	-7.55	6.5062G	-31.82	-27.59	-4.23	4
6545MHz Straddle 6.425-6.525GHz	Pass	6.5402G	-7.94	6.5038G	-31.89	-27.98	-3.91	1
6545MHz Straddle 6.425-6.525GHz	Pass	6.55219G	-7.45	6.5862G	-31.62	-27.49	-4.13	2
6545MHz Straddle 6.425-6.525GHz	Pass	6.53741G	-7.70	6.5038G	-32.00	-27.74	-4.26	3
6545MHz Straddle 6.425-6.525GHz	Pass	6.53781G	-7.64	6.5038G	-32.12	-27.68	-4.44	4
6625MHz	Pass	6.58744G	-7.94	6.6662G	-32.15	-27.98	-4.17	1
6625MHz	Pass	6.58904G	-7.40	6.5838G	-31.53	-27.44	-4.09	2
6625MHz	Pass	6.621G	-7.62	6.6662G	-31.87	-27.66	-4.21	3
6625MHz	Pass	6.58744G	-7.51	6.5838G	-31.41	-27.55	-3.86	4
6705MHz	Pass	6.71019G	-7.24	6.6638G	-31.52	-27.28	-4.24	1
6705MHz	Pass	6.67063G	-7.12	6.6638G	-31.07	-27.16	-3.91	2
6705MHz	Pass	6.7078G	-7.25	6.6638G	-31.84	-27.29	-4.55	3
6705MHz	Pass	6.68062G	-7.44	6.7462G	-31.64	-27.48	-4.16	4
6785MHz	Pass	6.74744G	-7.26	6.7438G	-31.37	-27.30	-4.07	1
6785MHz	Pass	6.76302G	-7.23	6.7438G	-31.21	-27.27	-3.94	2
6785MHz	Pass	6.75023G	-7.19	6.7438G	-31.35	-27.23	-4.12	3
6785MHz	Pass	6.75183G	-7.68	6.7438G	-31.91	-27.72	-4.19	4
6865MHz Straddle 6.875-7.125GHz	Pass	6.83103G	-7.72	6.8238G	-31.95	-27.76	-4.19	1
6865MHz Straddle 6.875-7.125GHz	Pass	6.82784G	-7.50	6.8238G	-31.65	-27.54	-4.11	2
6865MHz Straddle 6.875-7.125GHz	Pass	6.83623G	-7.57	6.8238G	-31.40	-27.61	-3.79	3
6865MHz Straddle 6.875-7.125GHz	Pass	6.87459G	-8.15	6.8238G	-32.31	-28.19	-4.12	4
6945MHz	Pass	6.90744G	-7.62	6.9038G	-31.67	-27.66	-4.01	1
6945MHz	Pass	6.91023G	-7.47	6.9038G	-31.47	-27.51	-3.96	2
6945MHz	Pass	6.90744G	-7.73	6.9038G	-31.88	-27.77	-4.11	3
6945MHz	Pass	6.93301G	-8.21	6.9038G	-32.38	-28.25	-4.13	4
7025MHz	Pass	6.98784G	-7.23	6.9838G	-31.36	-27.27	-4.09	1
7025MHz	Pass	6.99423G	-6.99	6.9838G	-30.85	-27.03	-3.82	2
7025MHz	Pass	6.98744G	-7.08	6.9838G	-31.41	-27.12	-4.29	3
7025MHz	Pass	6.98904G	-7.43	6.9838G	-31.68	-27.47	-4.21	4
802.11be EHT160_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.00822G	-5.61	6.3746G	-55.48	-45.61	-9.87	1
6025MHz	Pass	5.99223G	-4.79	6.3522G	-54.75	-44.79	-9.96	2
6025MHz	Pass	6.01621G	-5.22	6.3538G	-54.54	-45.22	-9.32	3
6025MHz	Pass	6.01861G	-5.35	6.4082G	-53.32	-45.35	-7.97	4
6185MHz	Pass	6.11147G	-5.78	6.497G	-55.11	-45.78	-9.33	1
6185MHz	Pass	6.11627G	-4.97	6.5202G	-54.49	-44.97	-9.52	2
6185MHz	Pass	6.12026G	-5.50	6.5178G	-53.91	-45.50	-8.41	3
6185MHz	Pass	6.11867G	-5.52	6.5698G	-53.01	-45.52	-7.49	4

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6345MHz	Pass	6.32982G	-5.46	6.0666G	-53.99	-45.46	-8.53	1
6345MHz	Pass	6.39855G	-4.93	6.0474G	-54.12	-44.93	-9.19	2
6345MHz	Pass	6.41293G	-5.16	6.6258G	-53.79	-45.16	-8.63	3
6345MHz	Pass	6.39135G	-5.18	6.7298G	-53.01	-45.18	-7.83	4
6505MHz Straddle 6.425-6.525GHz	Pass	6.48102G	-4.90	6.7778G	-54.58	-44.90	-9.68	1
6505MHz Straddle 6.425-6.525GHz	Pass	6.48502G	-4.70	6.1698G	-54.71	-44.70	-10.01	2
6505MHz Straddle 6.425-6.525GHz	Pass	6.52418G	-4.95	6.7626G	-53.97	-44.95	-9.02	3
6505MHz Straddle 6.425-6.525GHz	Pass	6.46904G	-4.71	6.8882G	-52.95	-44.71	-8.24	4
6665MHz	Pass	6.63063G	-4.87	6.3738G	-54.43	-44.87	-9.56	1
6665MHz	Pass	6.59467G	-3.98	6.3682G	-54.11	-43.98	-10.13	2
6665MHz	Pass	6.62824G	-4.57	6.9498G	-53.77	-44.57	-9.20	3
6665MHz	Pass	6.59227G	-4.27	6.9354G	-52.94	-44.27	-8.67	4
6825MHz Straddle 6.875-7.125GHz	Pass	6.76026G	-4.90	6.5282G	-54.22	-44.90	-9.32	1
6825MHz Straddle 6.875-7.125GHz	Pass	6.75067G	-4.45	6.4714G	-53.52	-44.45	-9.07	2
6825MHz Straddle 6.875-7.125GHz	Pass	6.76346G	-4.78	6.517G	-54.22	-44.78	-9.44	3
6825MHz Straddle 6.875-7.125GHz	Pass	6.81301G	-5.22	6.4402G	-53.37	-45.22	-8.15	4
6985MHz	Pass	6.90908G	-4.83	6.681G	-53.57	-44.83	-8.74	1
6985MHz	Pass	6.91067G	-4.43	6.6202G	-53.25	-44.43	-8.82	2
6985MHz	Pass	6.92666G	-4.71	6.6018G	-53.93	-44.71	-9.22	3
6985MHz	Pass	6.92666G	-4.86	6.6026G	-53.93	-44.86	-9.07	4
802.11be EHT320_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.017G	-1.84	6.6042G	-52.77	-41.63	-11.14	1
6105MHz	Pass	5.9786G	-1.47	6.6106G	-51.21	-41.47	-9.74	2
6105MHz	Pass	6.049G	-1.58	6.6266G	-52.58	-41.58	-11.00	3
6105MHz	Pass	6.017G	-1.61	6.609G	-51.39	-41.61	-9.78	4
6265MHz	Pass	6.1978G	-1.98	6.7818G	-52.26	-41.98	-10.28	1
6265MHz	Pass	6.1322G	-1.48	6.7738G	-52.84	-41.47	-11.37	2
6265MHz	Pass	6.281G	-1.74	6.7802G	-52.02	-41.73	-10.29	3
6265MHz	Pass	6.1946G	-1.72	6.7738G	-51.20	-41.72	-9.48	4
6425MHz Straddle 5.925-6.425GHz	Pass	6.5354G	-2.00	5.9194G	-52.89	-41.92	-10.97	1
6425MHz Straddle 5.925-6.425GHz	Pass	6.441G	-1.10	5.921G	-52.90	-41.10	-11.80	2
6425MHz Straddle 5.925-6.425GHz	Pass	6.5258G	-1.52	5.9306G	-51.29	-40.97	-10.32	3
6425MHz Straddle 5.925-6.425GHz	Pass	6.401G	-1.28	5.9162G	-51.21	-41.28	-9.93	4
6585MHz Straddle 6.425-6.525GHz	Pass	6.5962G	-1.35	6.0618G	-51.93	-41.35	-10.58	1
6585MHz Straddle 6.425-6.525GHz	Pass	6.5306G	-0.90	6.081G	-50.74	-40.90	-9.84	2
6585MHz Straddle 6.425-6.525GHz	Pass	6.5946G	-1.35	6.0714G	-51.08	-41.35	-9.73	3
6585MHz Straddle 6.425-6.525GHz	Pass	6.5594G	-1.19	6.0746G	-49.95	-41.19	-8.76	4
6745MHz Straddle 6.875-7.125GHz	Pass	6.5978G	-1.69	6.2362G	-51.42	-41.69	-9.73	1
6745MHz Straddle 6.875-7.125GHz	Pass	6.5914G	-0.34	6.2378G	-50.21	-40.25	-9.96	2
6745MHz Straddle 6.875-7.125GHz	Pass	6.7178G	-1.60	6.2426G	-50.49	-41.60	-8.89	3
6745MHz Straddle 6.875-7.125GHz	Pass	6.5914G	-1.47	6.233G	-50.60	-41.47	-9.13	4
6905MHz Straddle 6.875-7.125GHz	Pass	6.7578G	-1.14	6.3978G	-50.74	-41.14	-9.60	1




Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6905MHz Straddle 6.875-7.125GHz	Pass	6.7498G	-1.23	6.3978G	-48.75	-41.23	-7.52	2
6905MHz Straddle 6.875-7.125GHz	Pass	6.8522G	-1.42	6.393G	-50.34	-41.42	-8.92	3
6905MHz Straddle 6.875-7.125GHz	Pass	6.7514G	-2.30	6.3978G	-51.28	-42.30	-8.98	4

5.925-6.425GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


5935MHz_TX

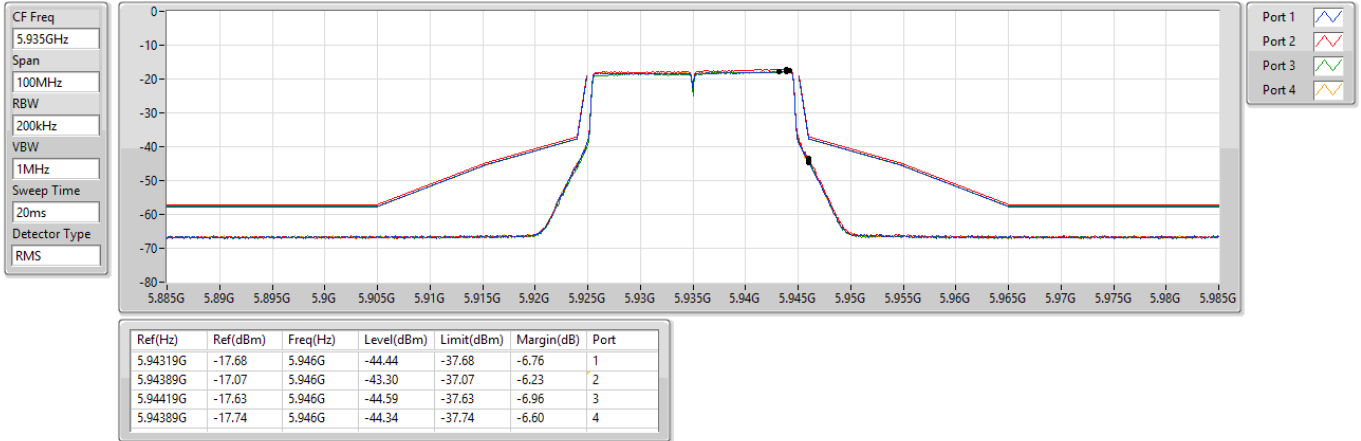

5.925-6.425GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


5955MHz_TX

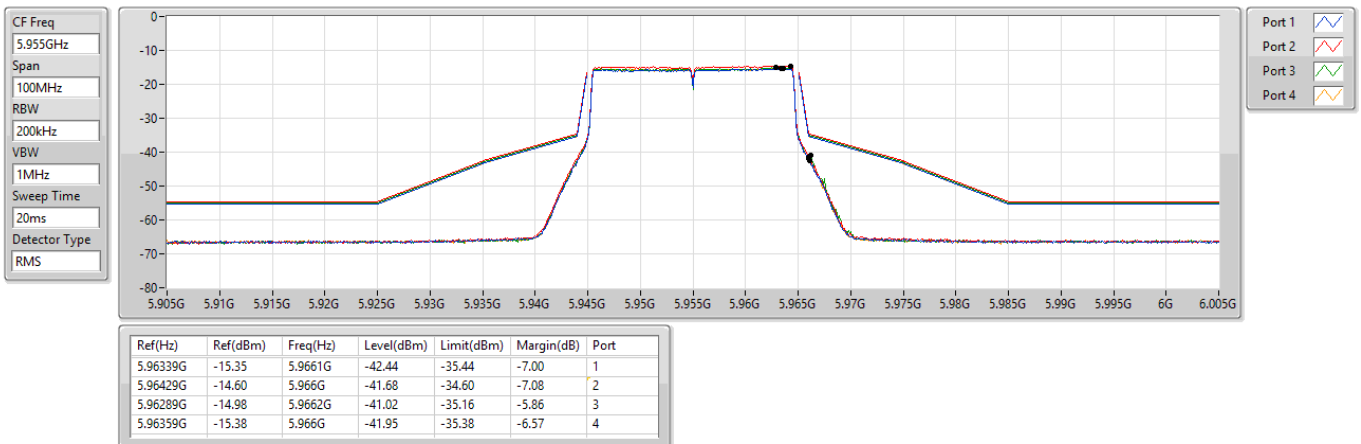

5.925-6.425GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


6175MHz_TX

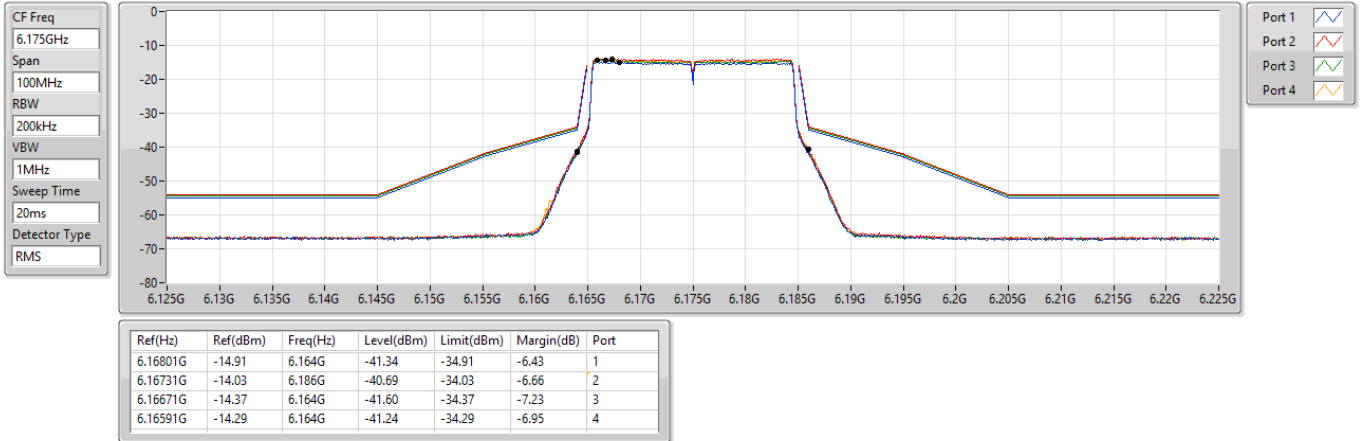

5.925-6.425GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


6415MHz_TX

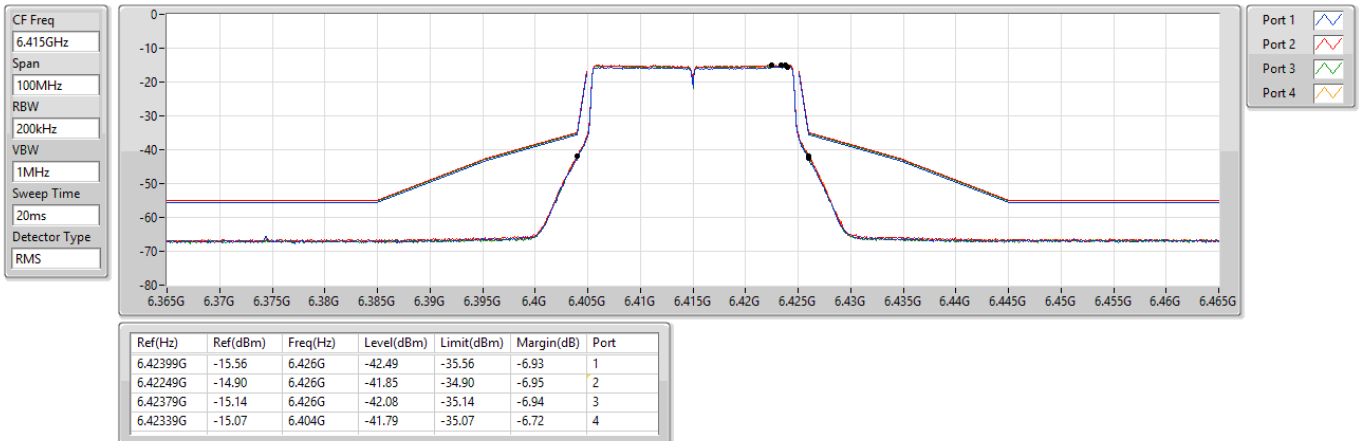

6.425-6.525GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


6435MHz_TX

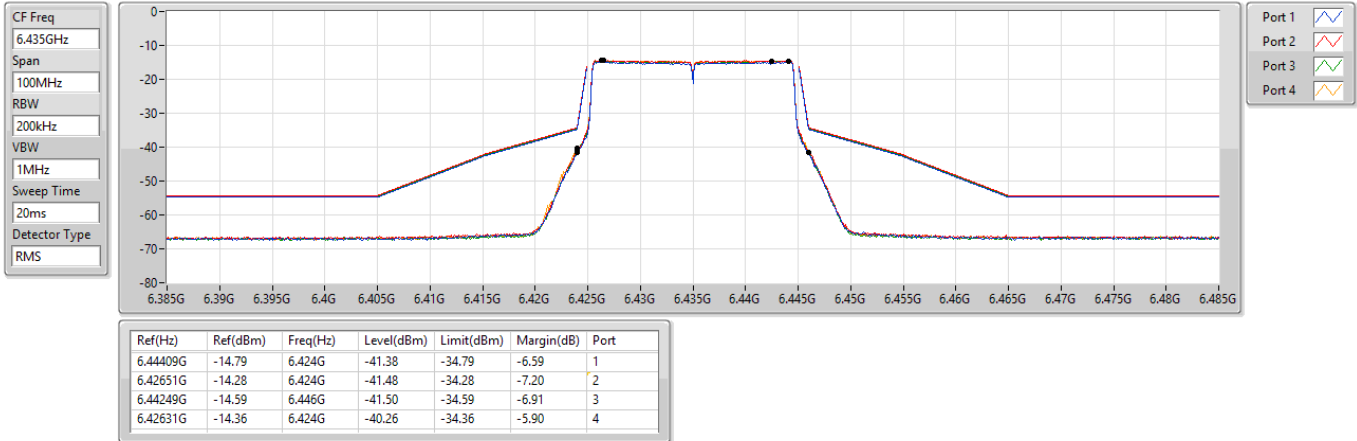

6.425-6.525GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


6475MHz_TX

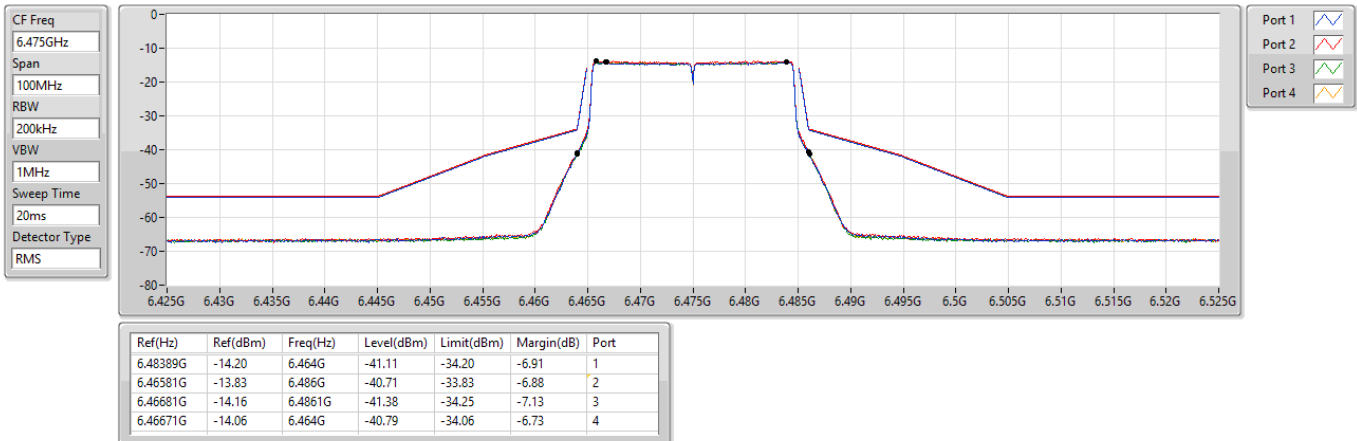

6.425-6.525GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


6515MHz_TX

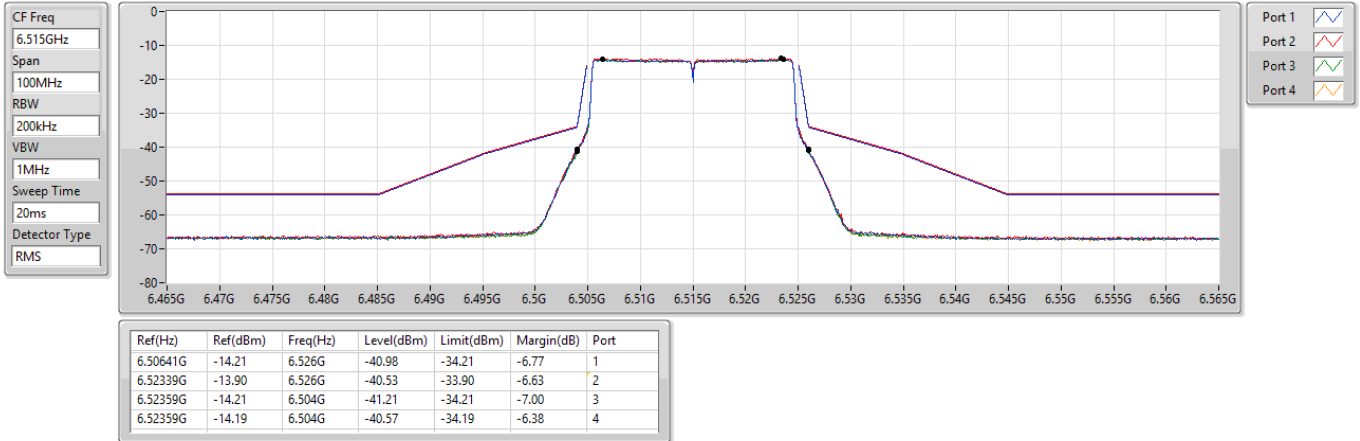

6.525-6.875GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK

6535MHz_TX

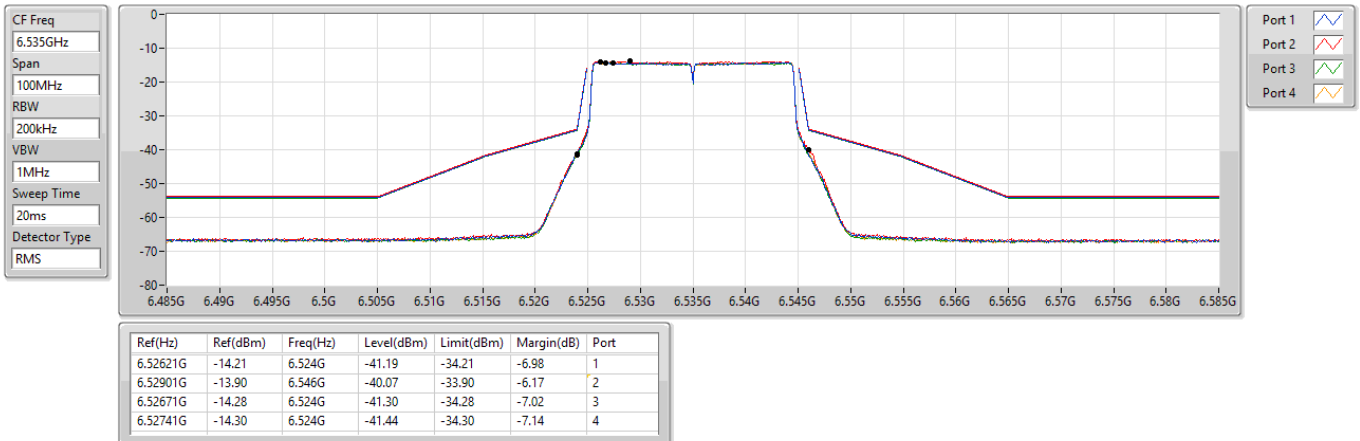




6.525-6.875GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


6715MHz_TX

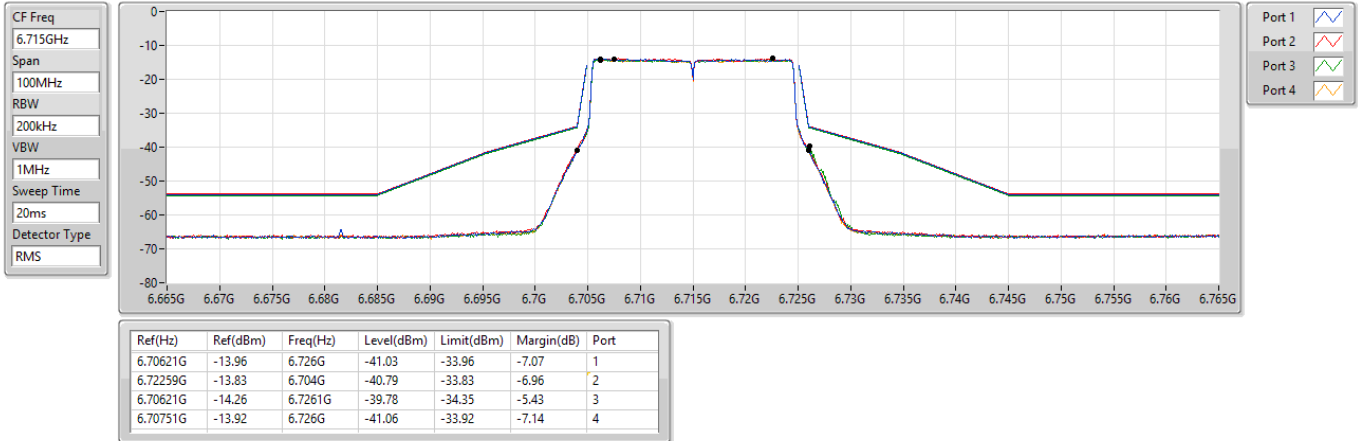

6.525-6.875GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


6855MHz_TX

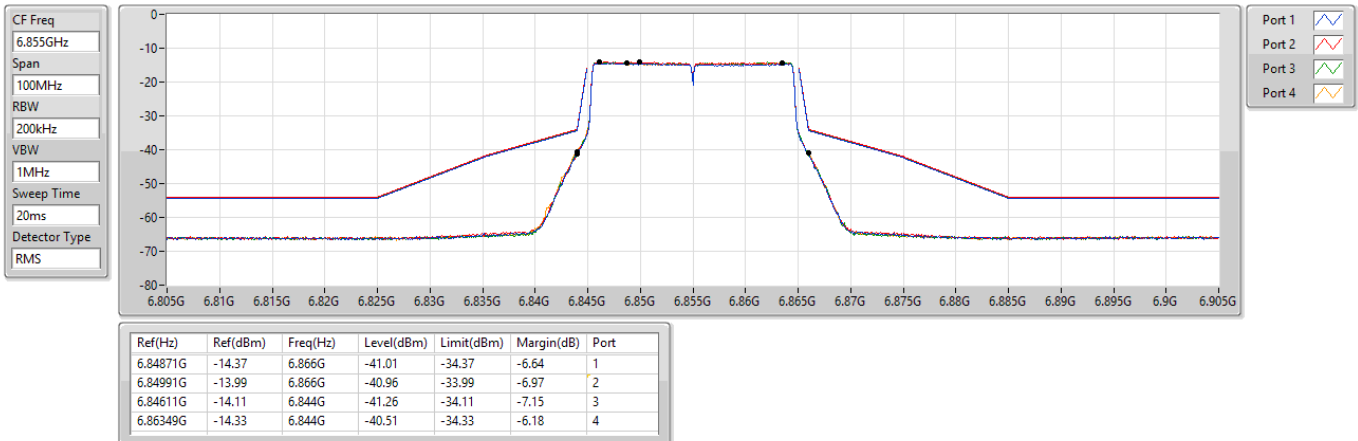

6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


6875MHz Straddle 6.875-7.125GHz_TX

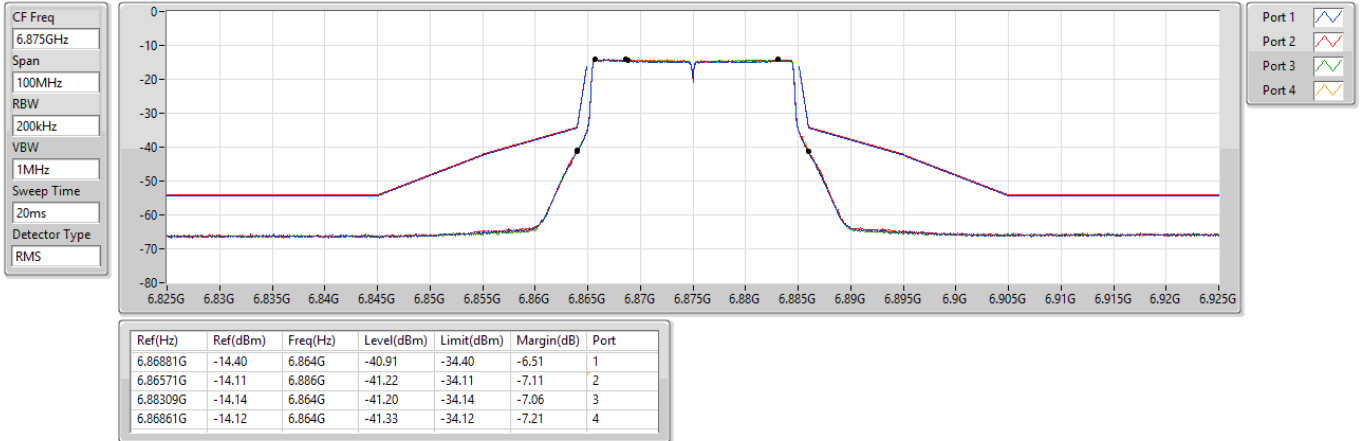

6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK

6895MHz_TX

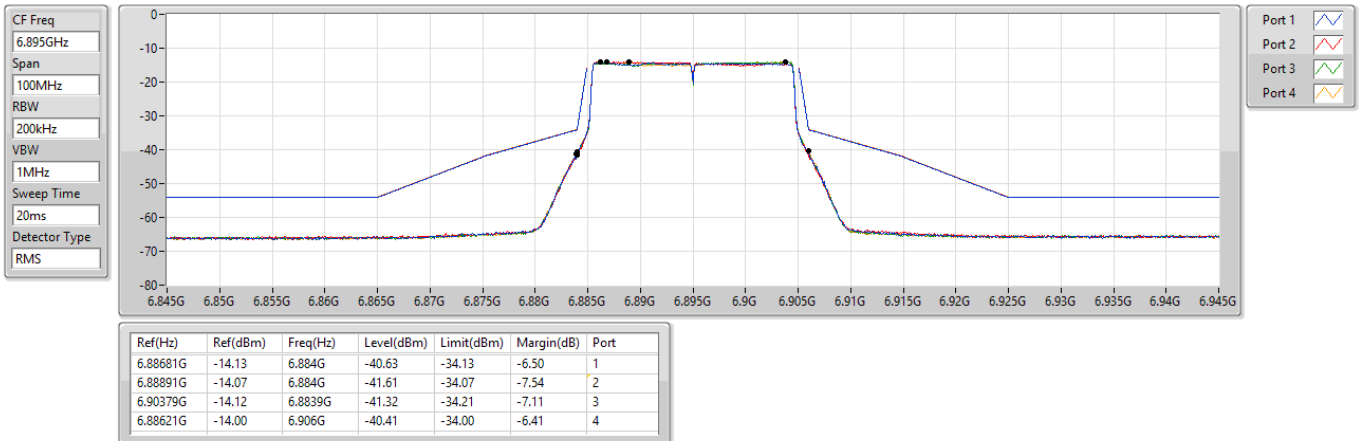




6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


7015MHz_TX

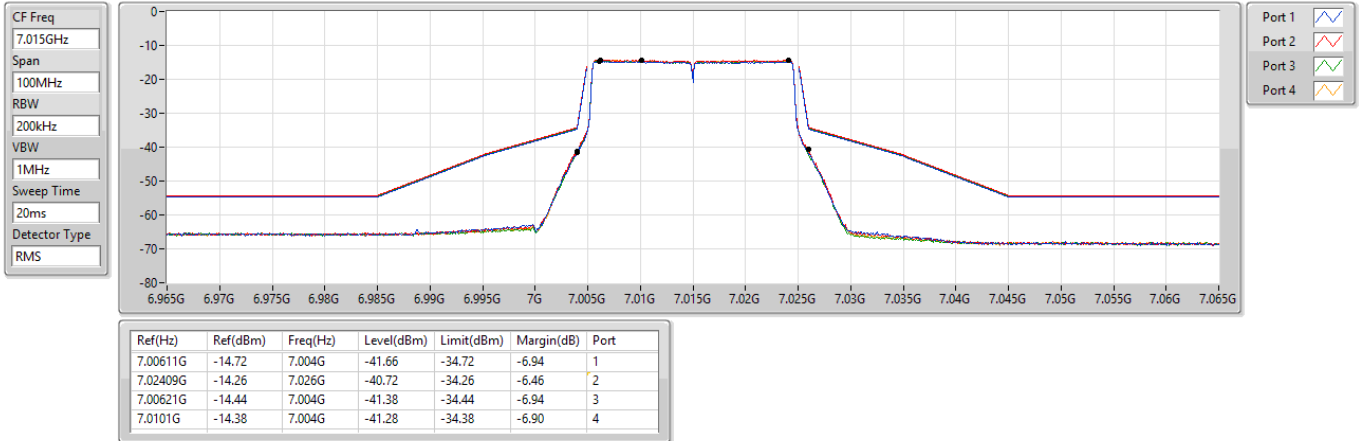

6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK

7095MHz_TX

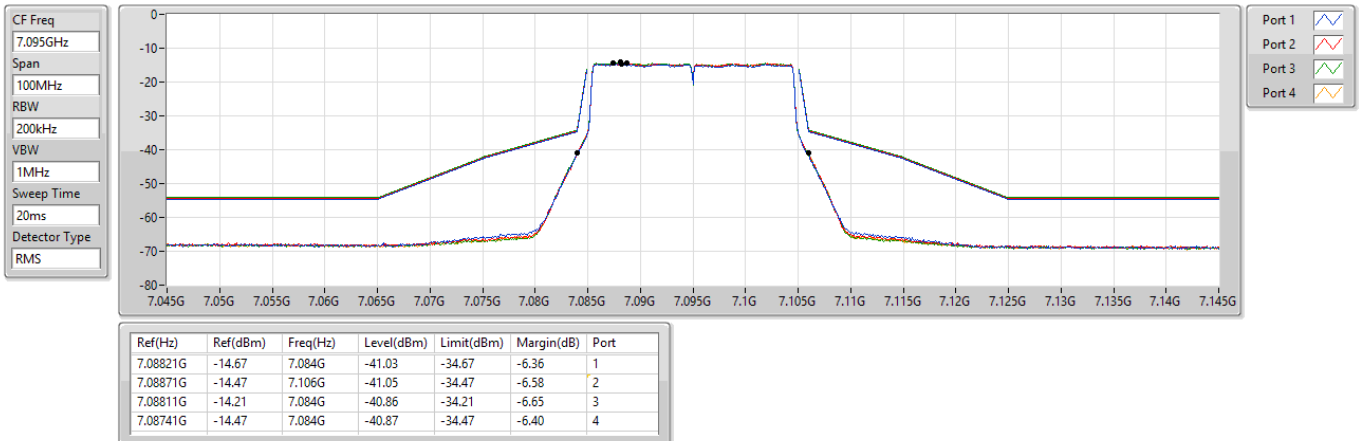




6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


7115MHz_TX

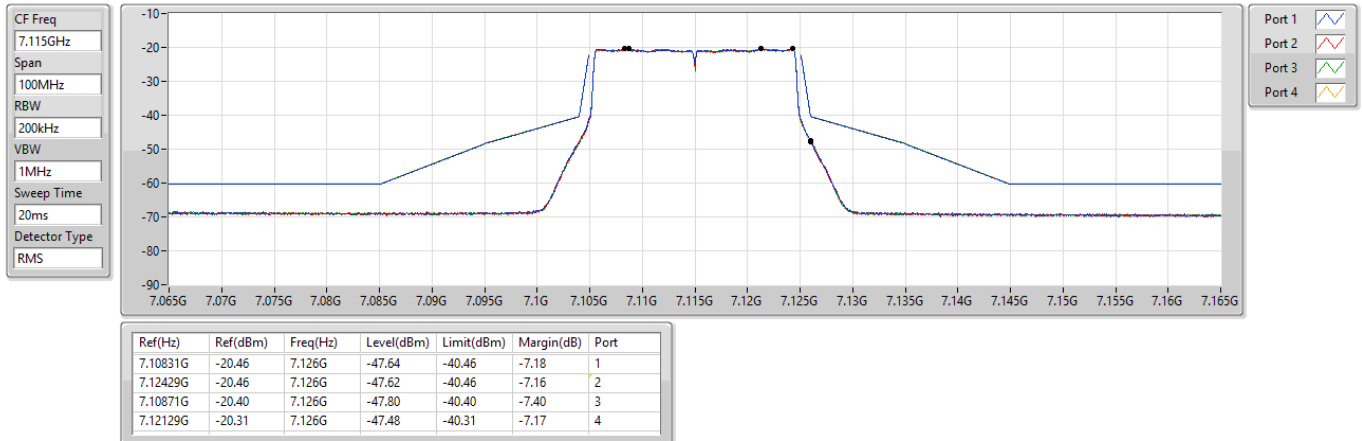

5.925-6.425GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK

5965MHz_TX

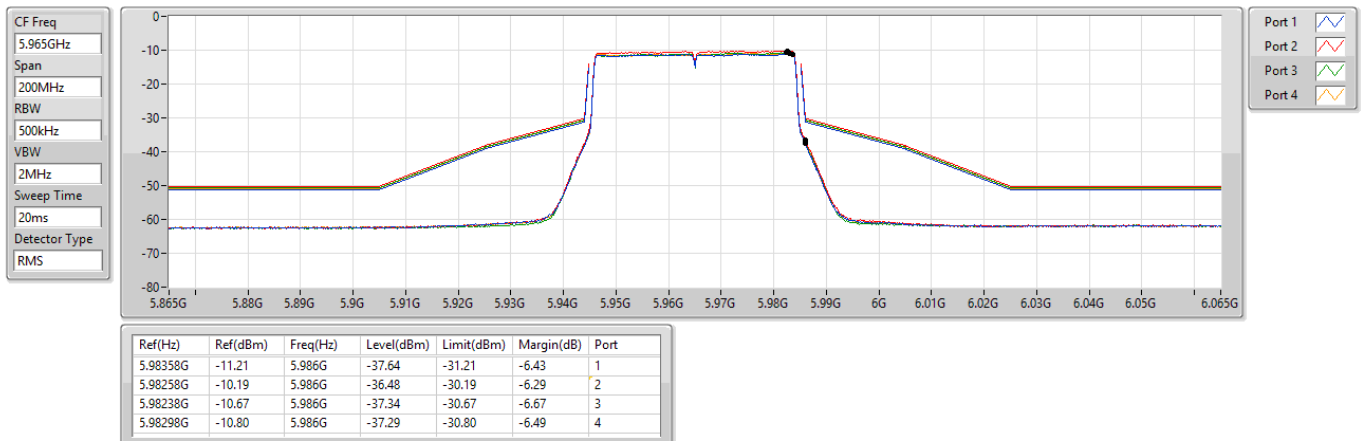




5.925-6.425GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK


6165MHz_TX

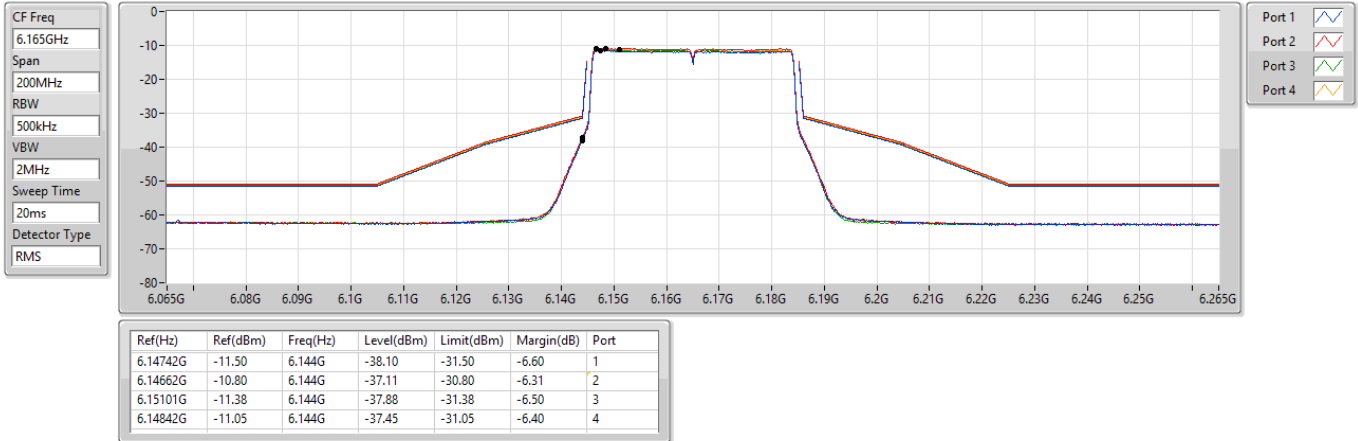

5.925-6.425GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK

6405MHz_TX

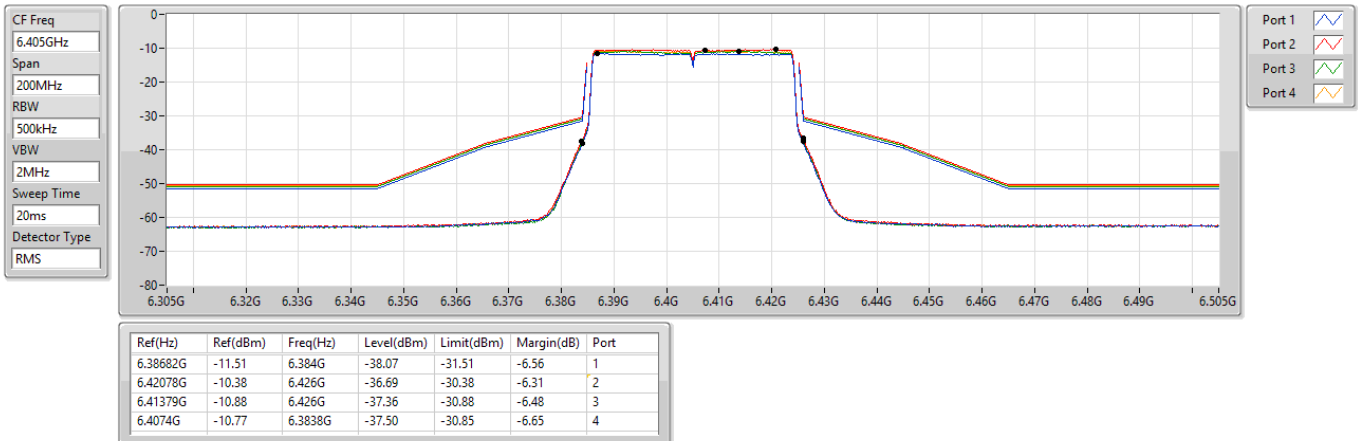




6.425-6.525GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK


6445MHz_TX

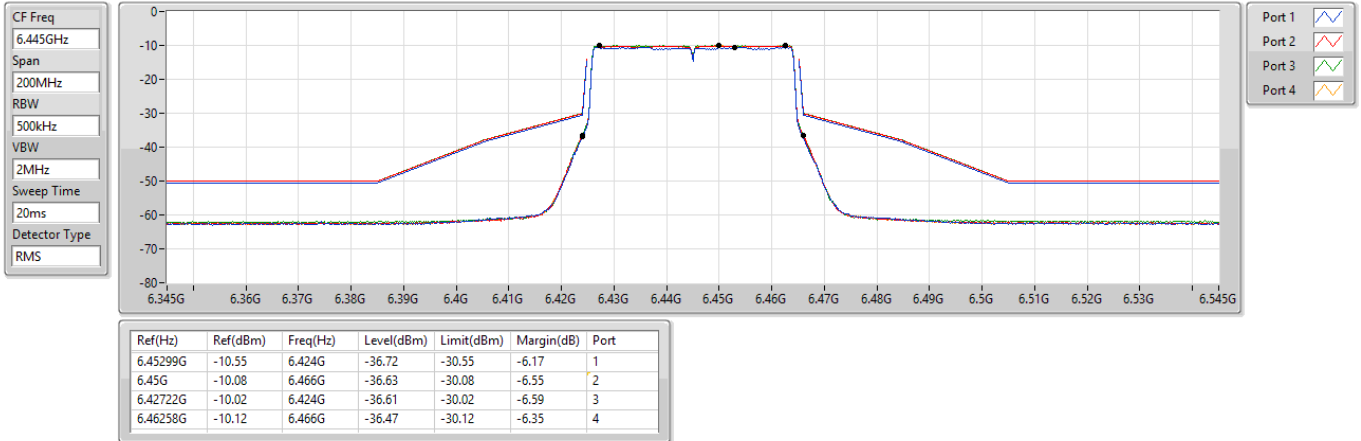

6.425-6.525GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK

6485MHz_TX

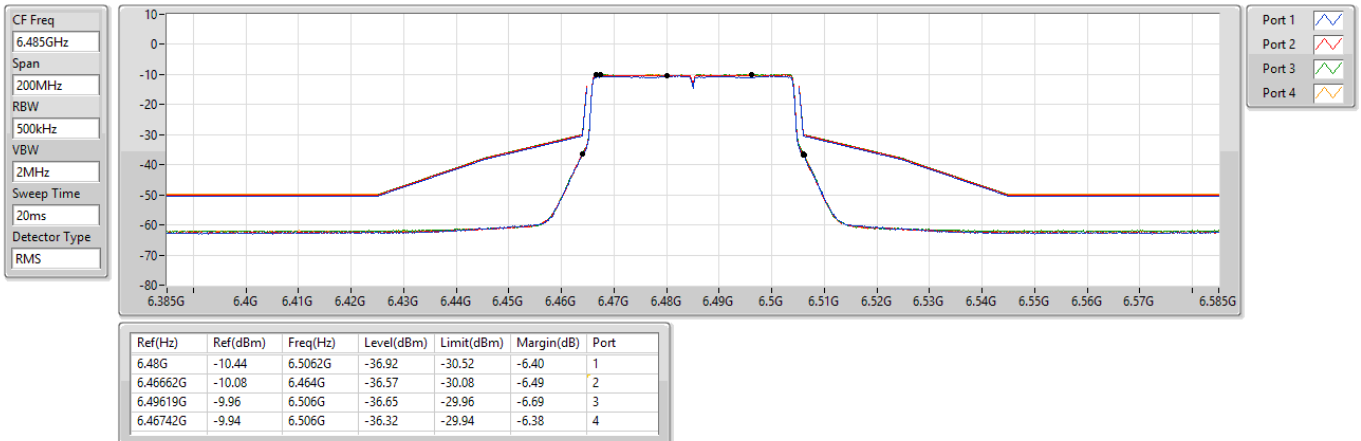




6.425-6.525GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK


6525MHz Straddle 6.425-6.525GHz_TX

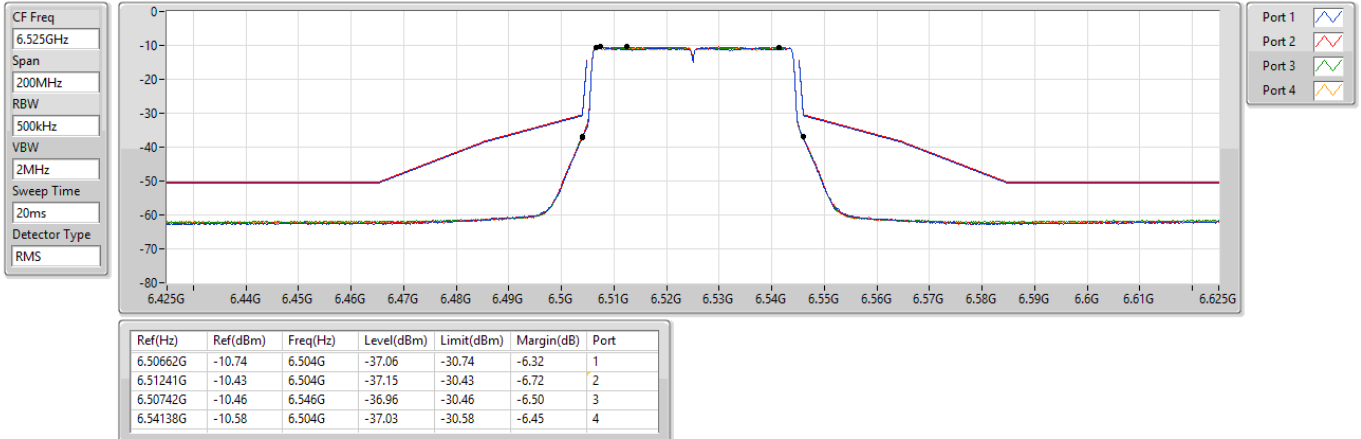

6.525-6.875GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK

6565MHz_TX

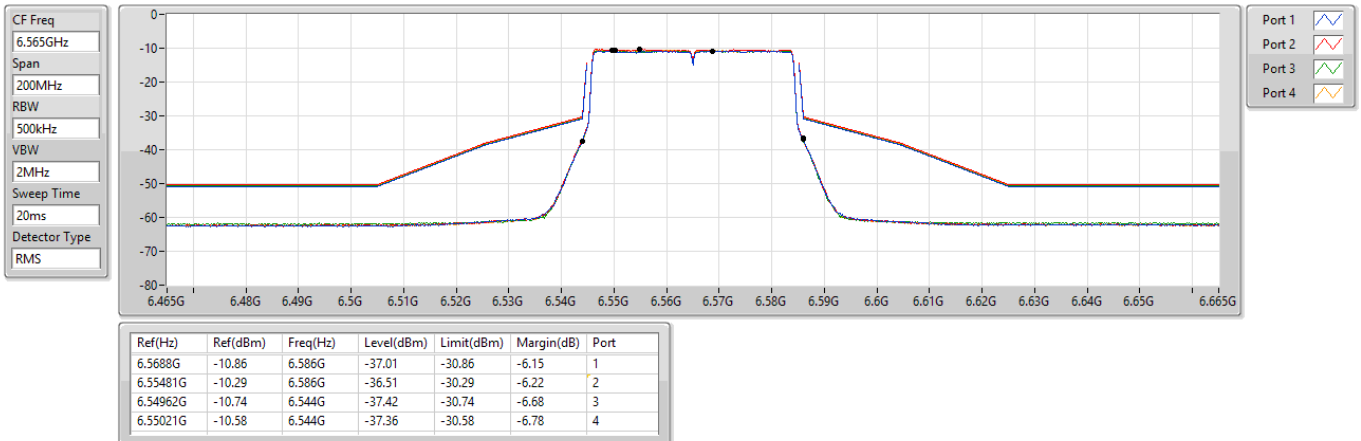




6.525-6.875GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK


6725MHz_TX

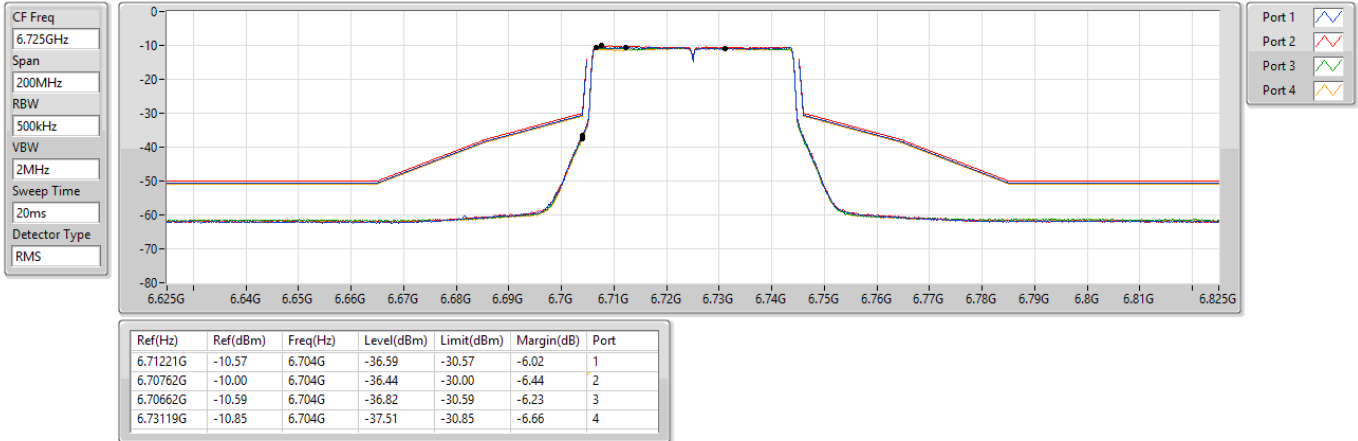

6.525-6.875GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK

6845MHz_TX

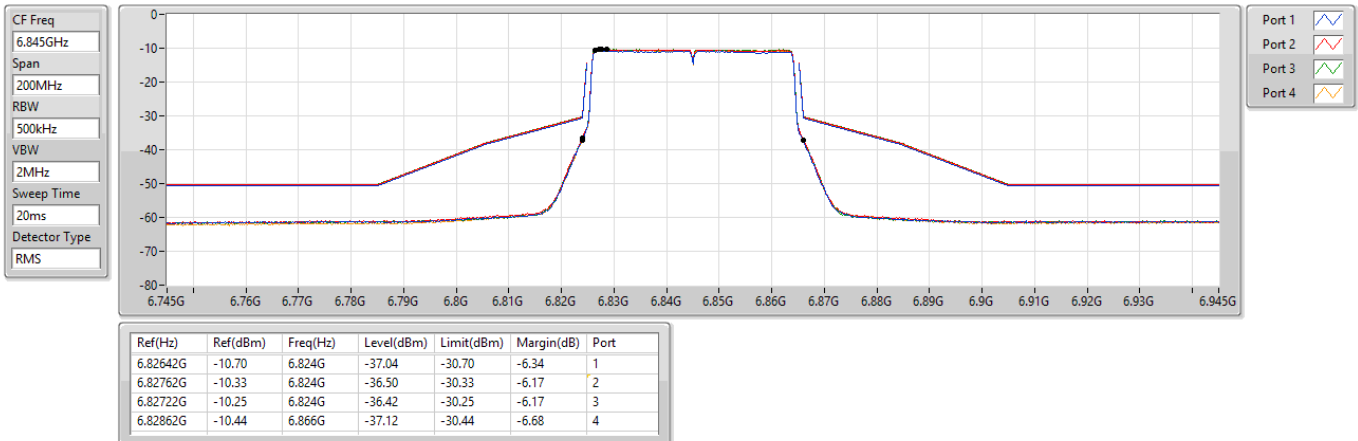




6.875-7.125GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK


6885MHz Straddle 6.875-7.125GHz_TX

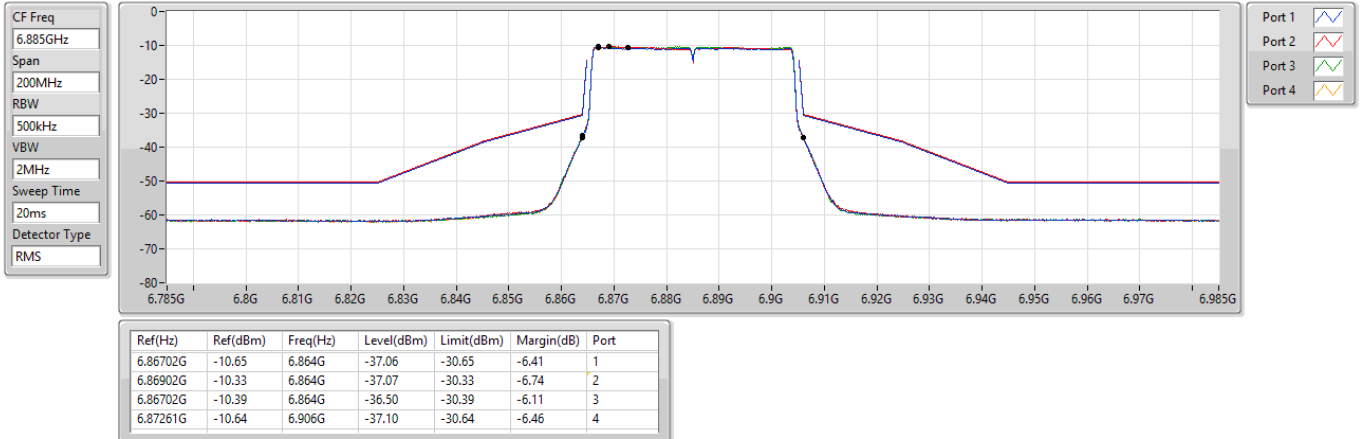

6.875-7.125GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK

6925MHz_TX

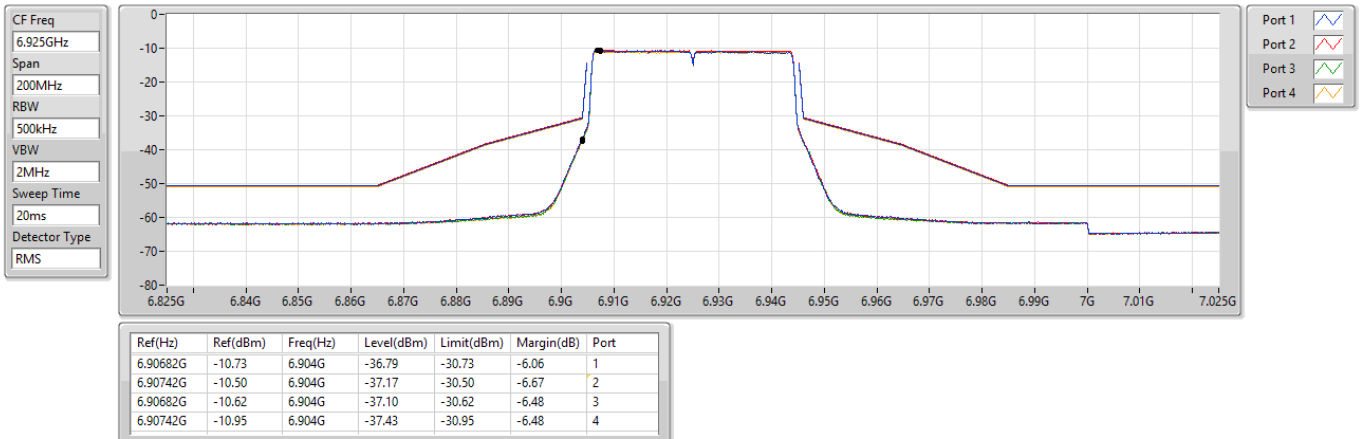




6.875-7.125GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK


7005MHz_TX

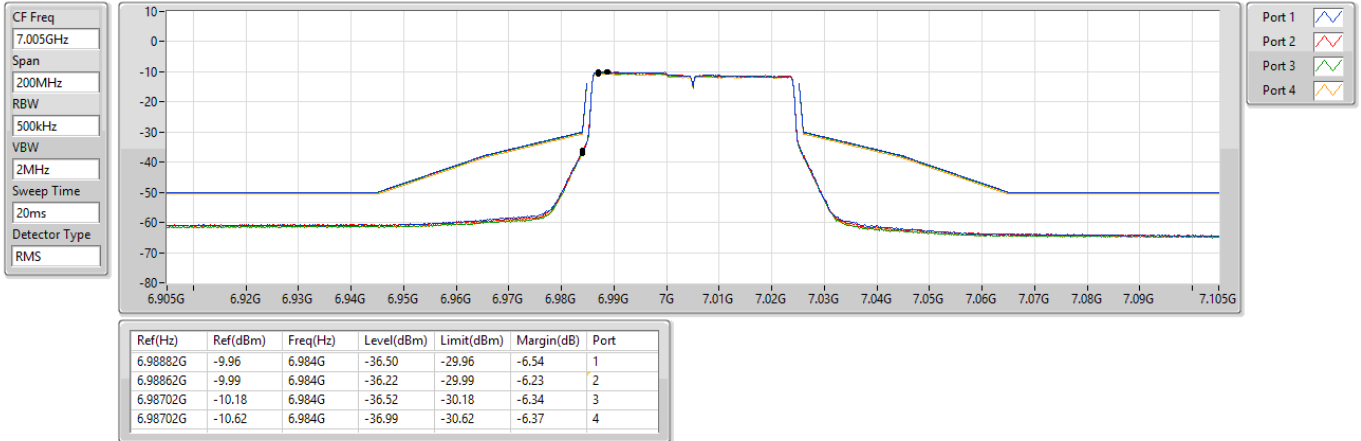

6.875-7.125GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK


7085MHz_TX

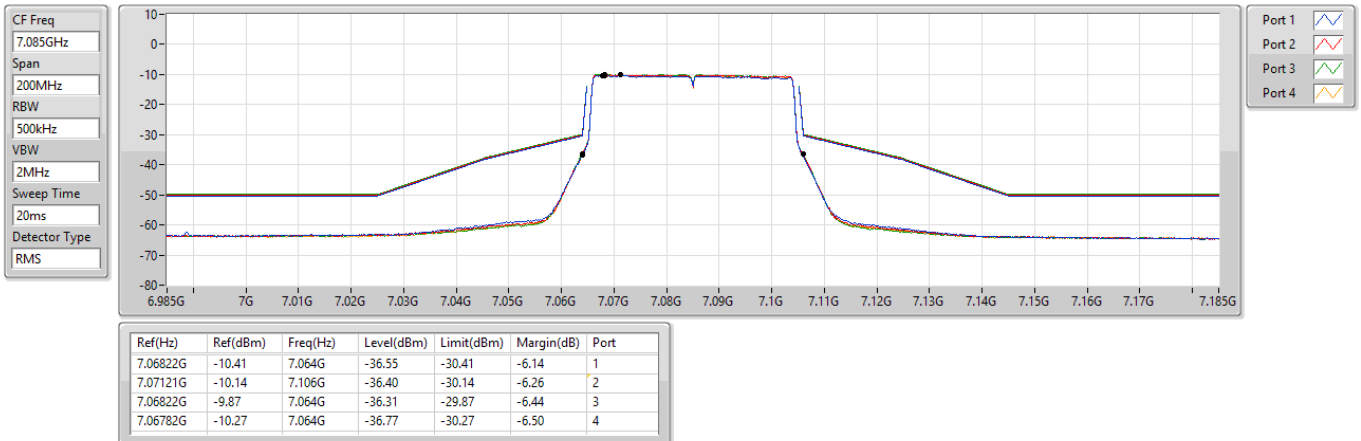

5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0)_4TX

MASK


5985MHz_TX

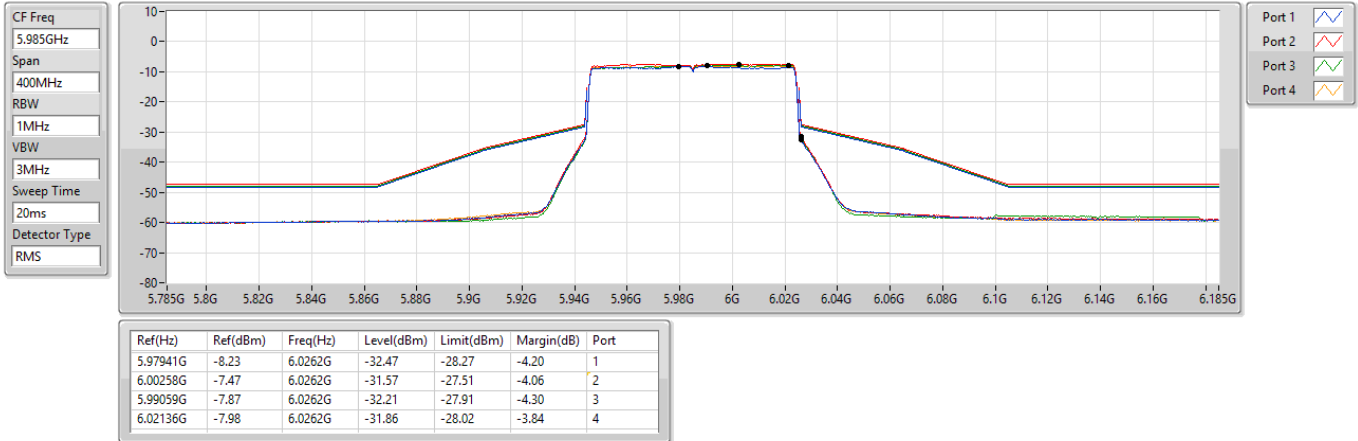

5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0)_4TX

MASK


6145MHz_TX

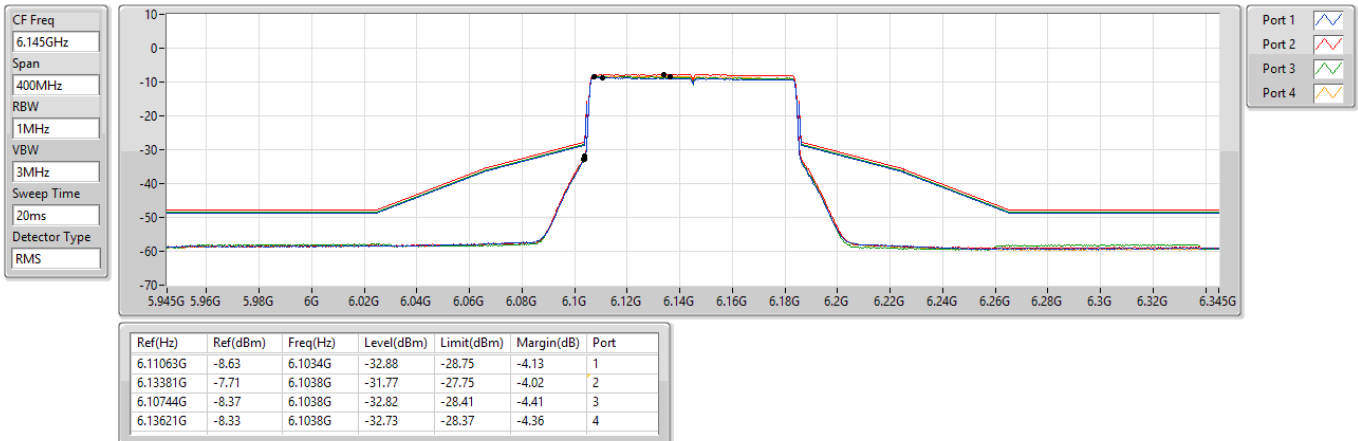

5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0)_4TX

MASK


6385MHz_TX

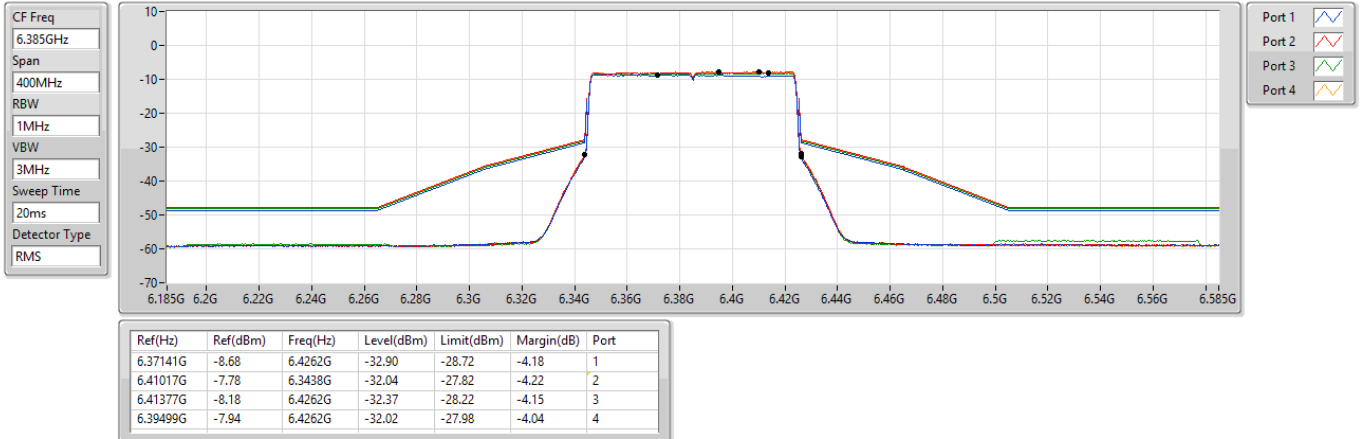

6.425-6.525GHz_802.11be EHT80_Nss4,(MCS0)_4TX

MASK

6465MHz_TX

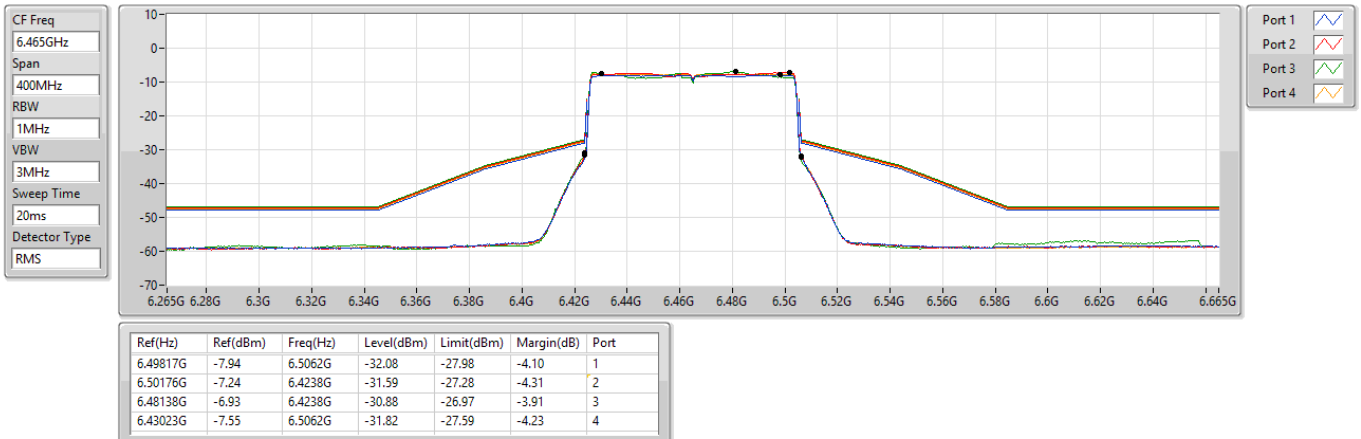




6.425-6.525GHz_802.11be EHT80_Nss4,(MCS0)_4TX

MASK


6545MHz Straddle 6.425-6.525GHz_TX

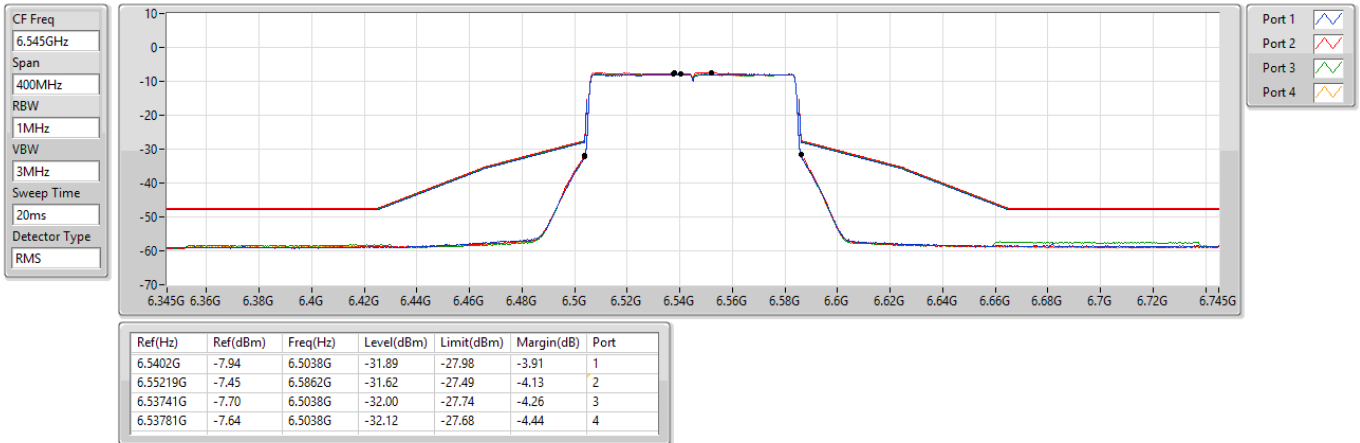

6.525-6.875GHz_802.11be EHT80_Nss4,(MCS0)_4TX

MASK


6625MHz_TX

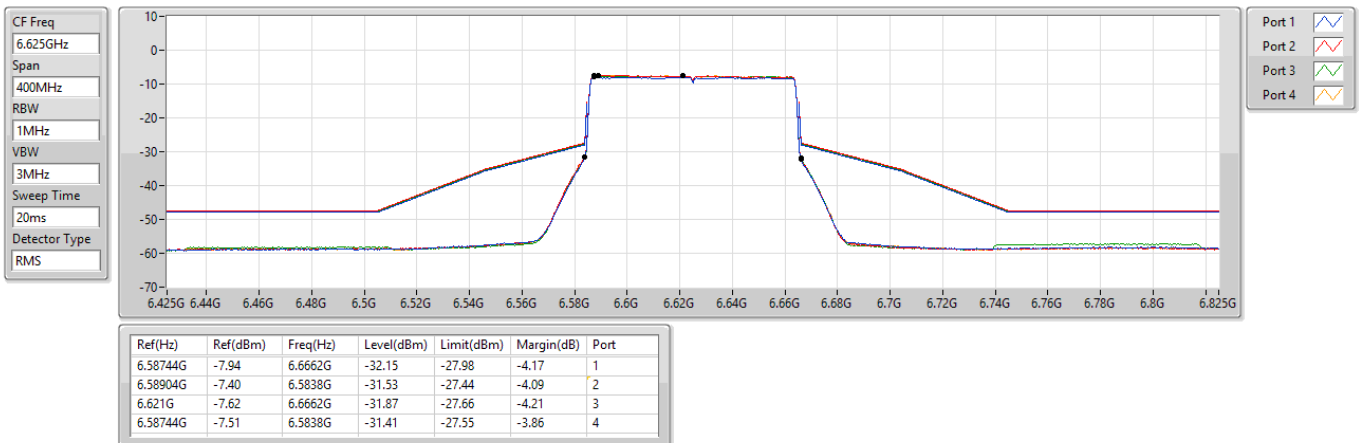

6.525-6.875GHz_802.11be EHT80_Nss4,(MCS0)_4TX

MASK


6705MHz_TX

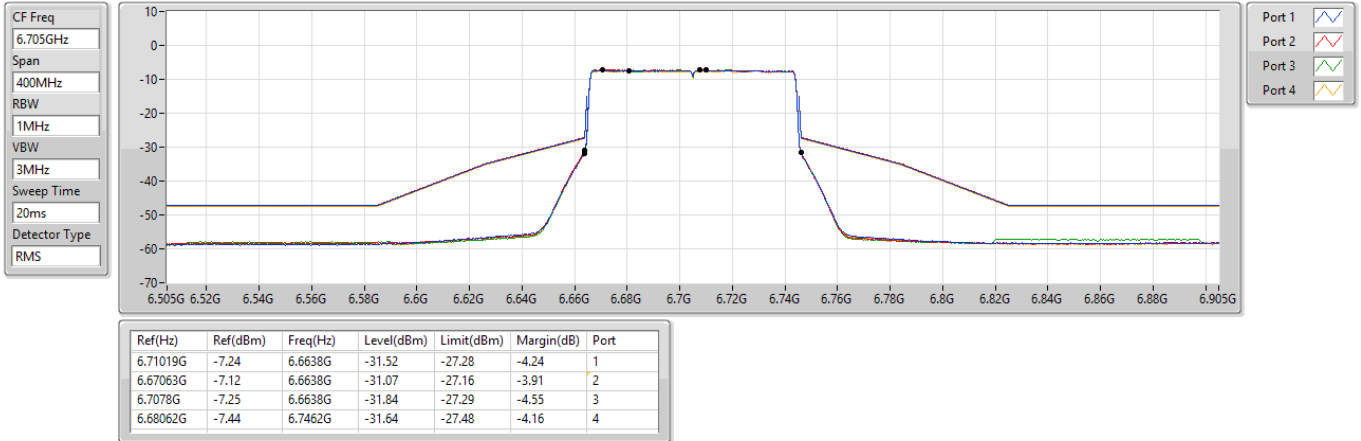

6.525-6.875GHz_802.11be EHT80_Nss4,(MCS0)_4TX

MASK


6785MHz_TX

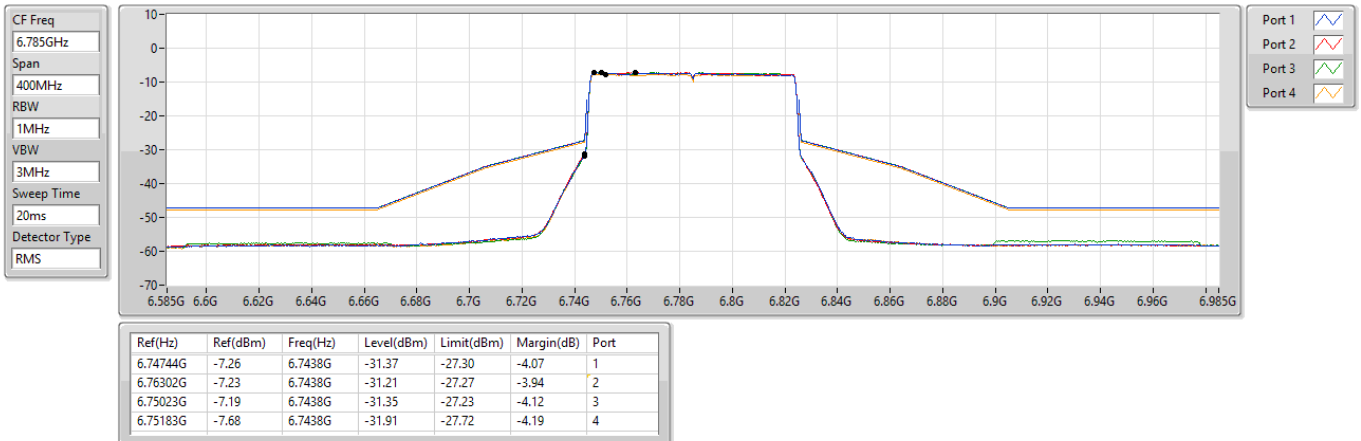

6.875-7.125GHz_802.11be EHT80_Nss4,(MCS0)_4TX

MASK


6865MHz Straddle 6.875-7.125GHz_TX

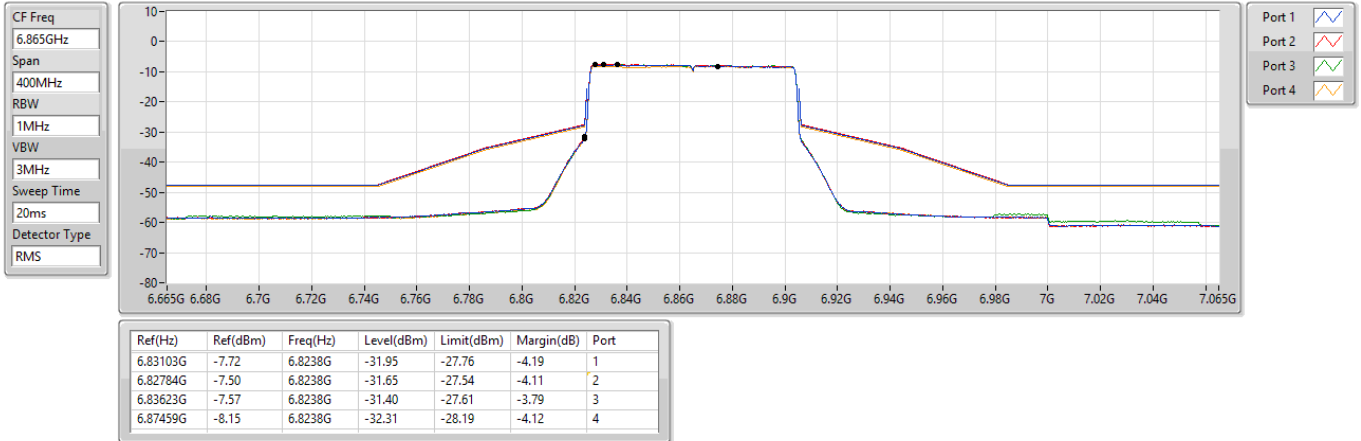

6.875-7.125GHz_802.11be EHT80_Nss4,(MCS0)_4TX

MASK

6945MHz_TX

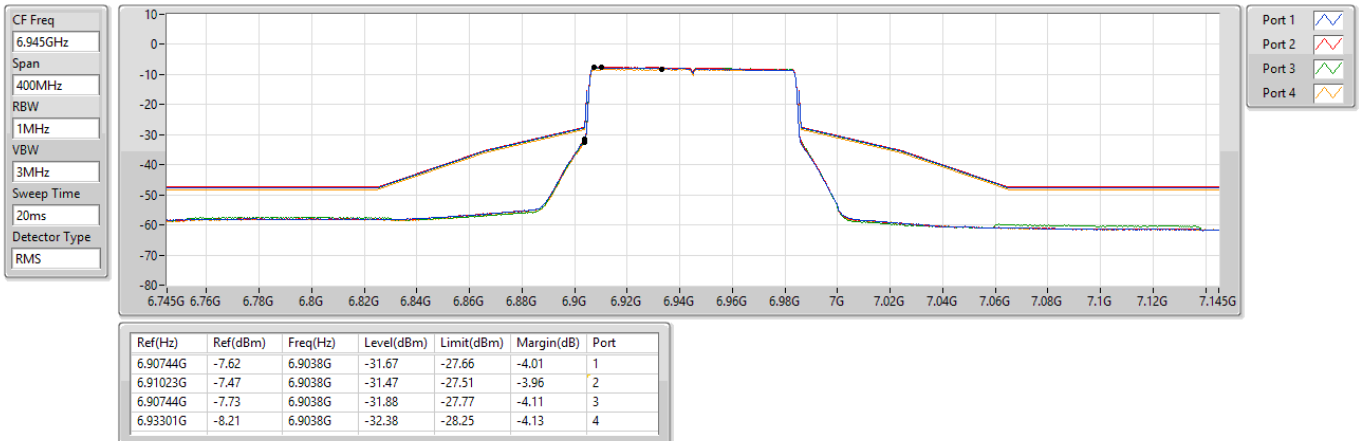




6.875-7.125GHz_802.11be EHT80_Nss4,(MCS0)_4TX

MASK


7025MHz_TX

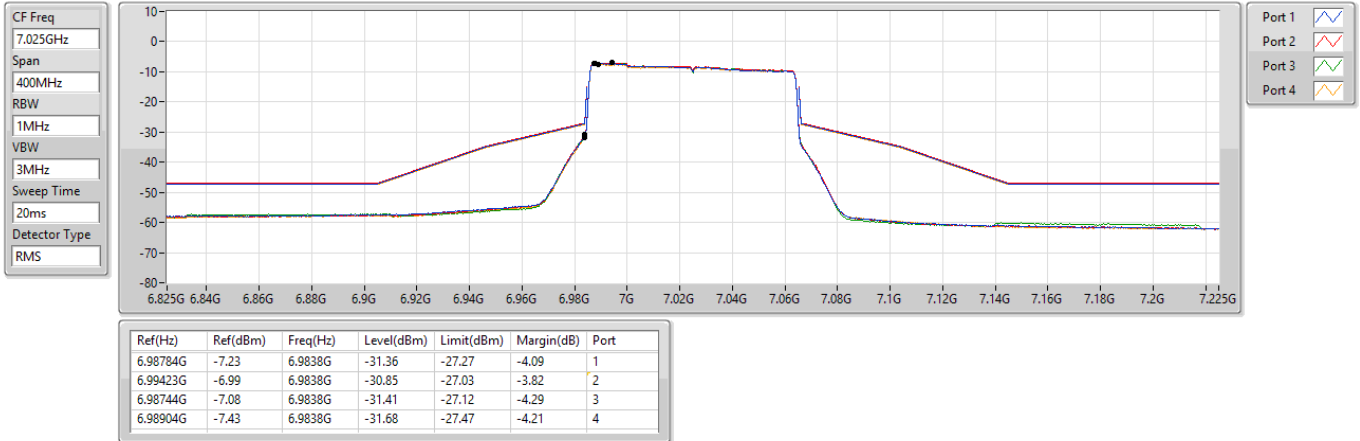

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0)_4TX

MASK


6025MHz_TX

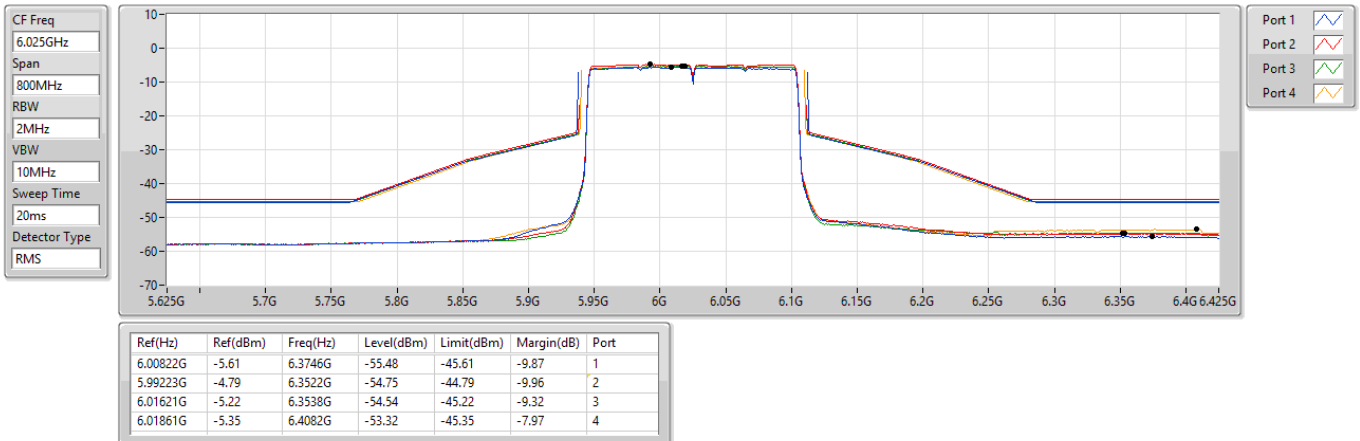

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0)_4TX

MASK


6185MHz_TX

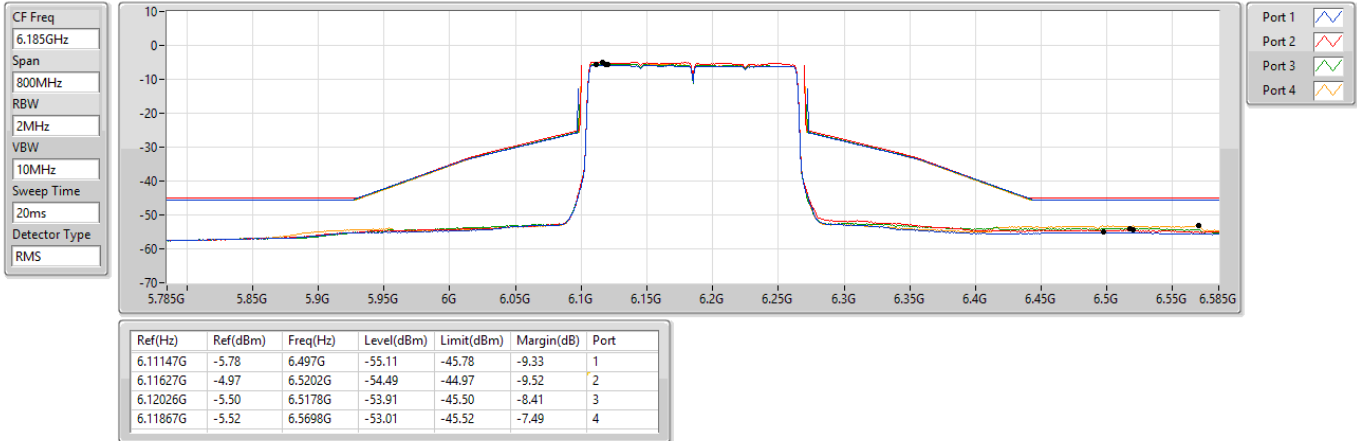

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0)_4TX

MASK


6345MHz_TX

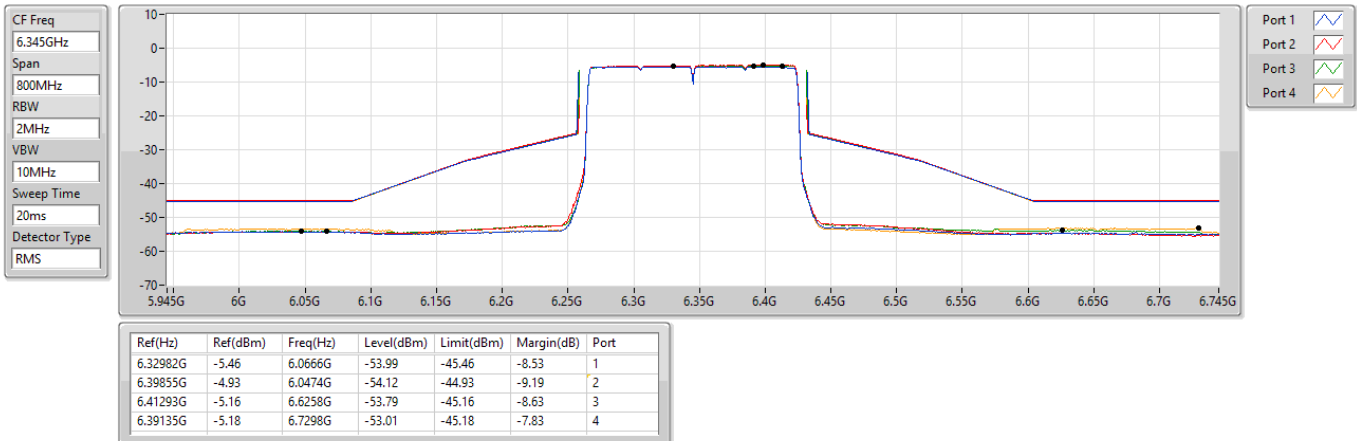

6.425-6.525GHz 802.11be EHT160_Nss4,(MCS0)_4TX

MASK


6505MHz Straddle 6.425-6.525GHz_TX

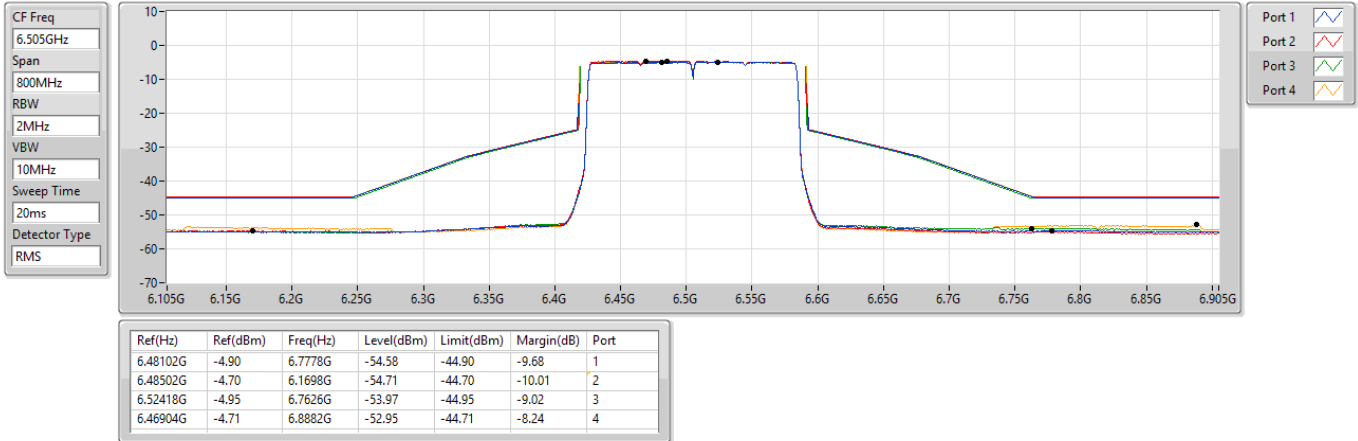

6.525-6.875GHz 802.11be EHT160_Nss4,(MCS0)_4TX

MASK


6665MHz_TX

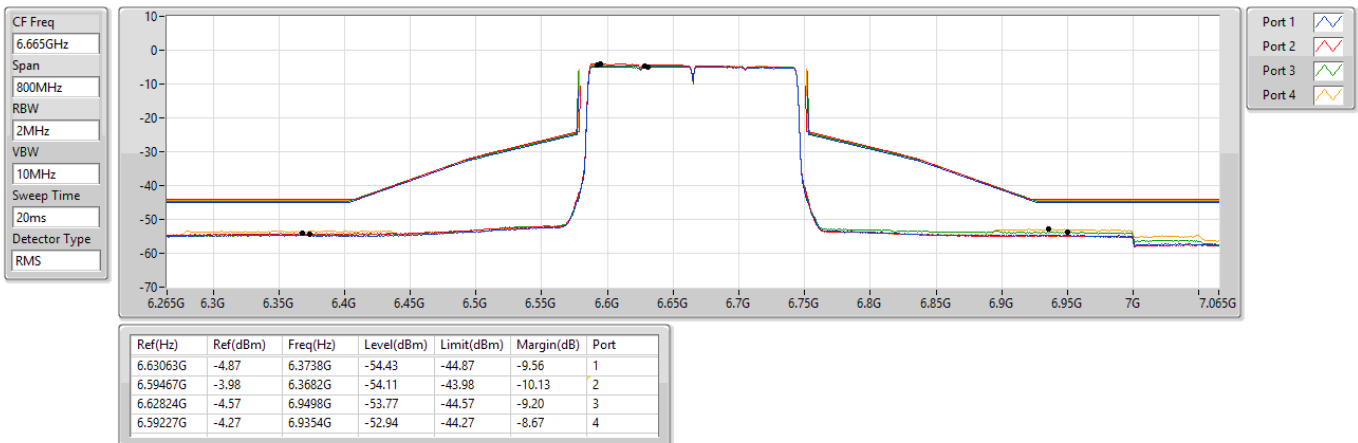

6.875-7.125GHz_802.11be EHT160_Nss4,(MCS0)_4TX

MASK


6825MHz Straddle 6.875-7.125GHz_TX

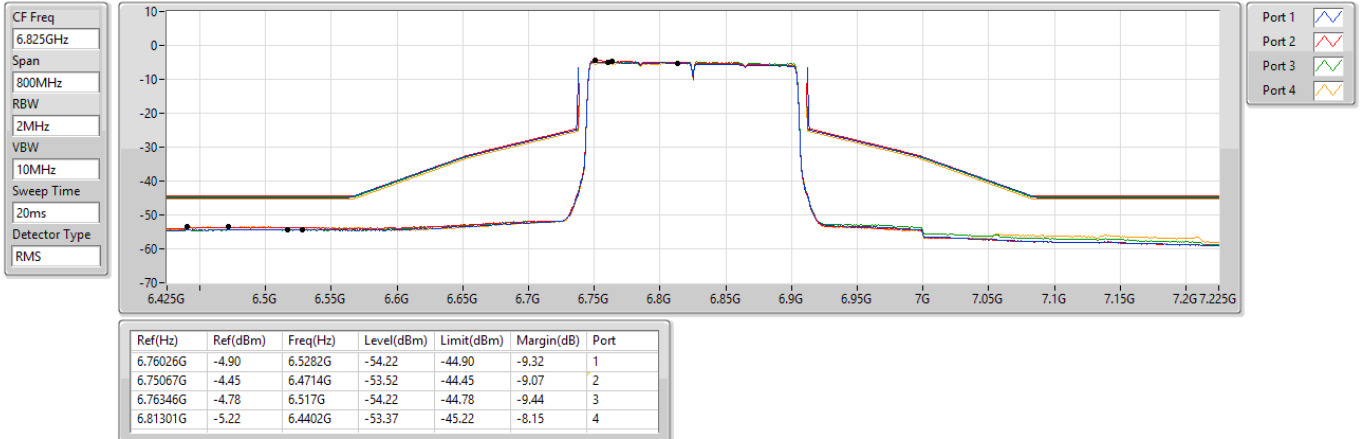

6.875-7.125GHz_802.11be EHT160_Nss4,(MCS0)_4TX

MASK


6985MHz_TX

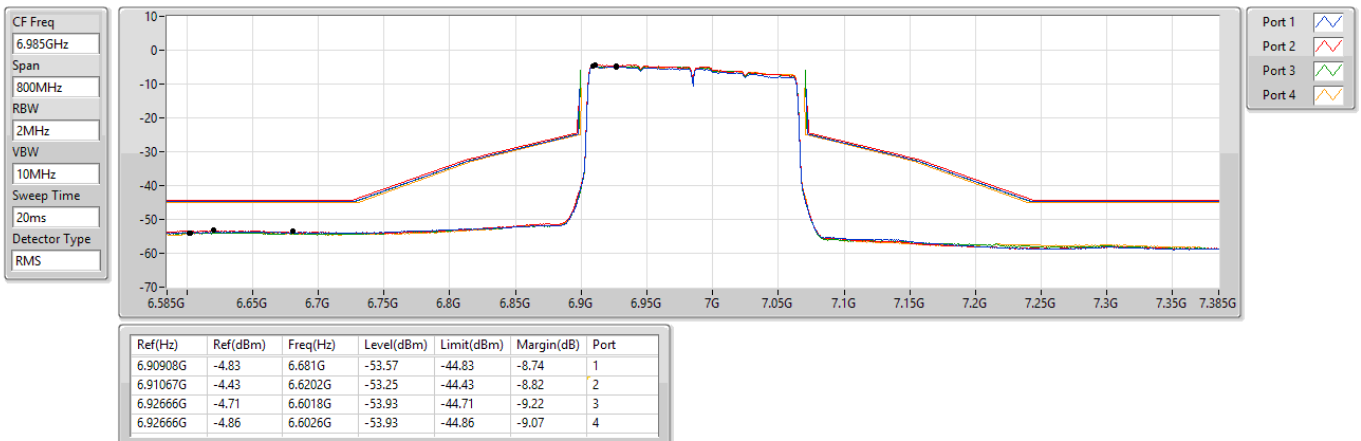

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0)_4TX

MASK


6105MHz_TX

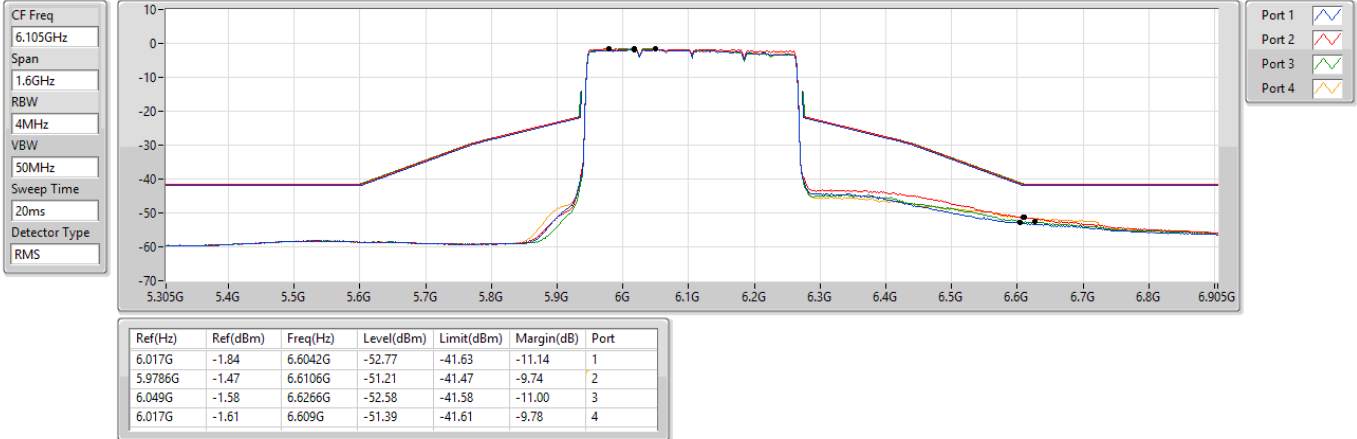

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0)_4TX

MASK


6265MHz_TX

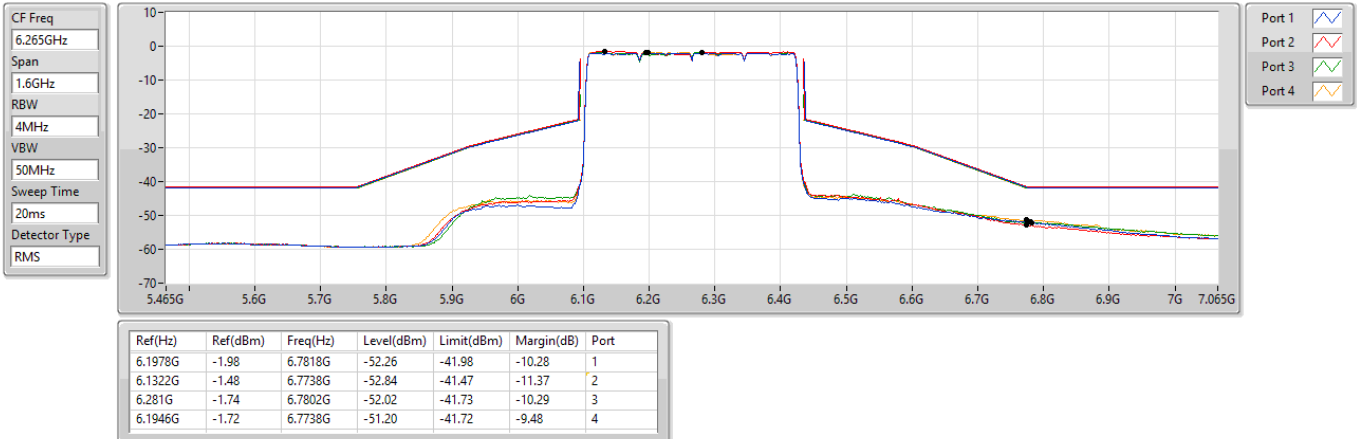

5.925-6.425GHz 802.11be EHT320_Nss4,(MCS0)_4TX

MASK


6425MHz Straddle 5.925-6.425GHz_TX

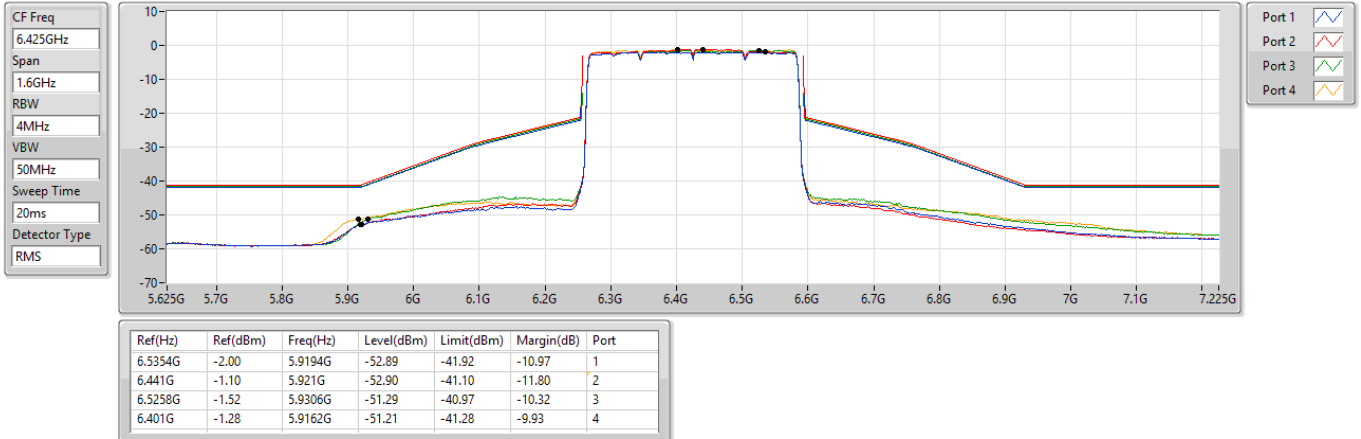

6.425-6.525GHz 802.11be EHT320_Nss4,(MCS0)_4TX

MASK


6585MHz Straddle 6.425-6.525GHz_TX

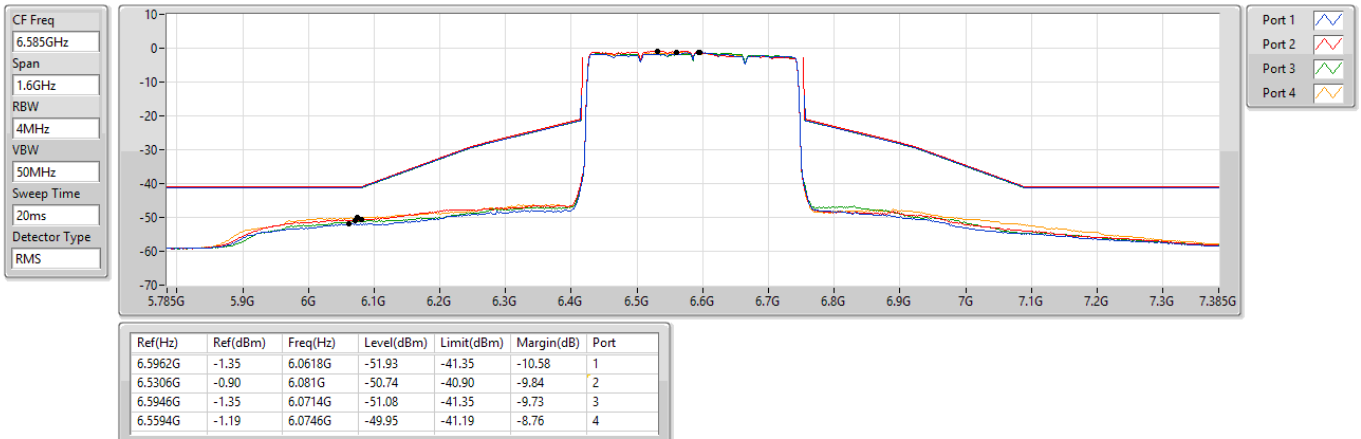

6.875-7.125GHz 802.11be EHT320_Nss4,(MCS0)_4TX

MASK


6745MHz Straddle 6.875-7.125GHz_TX

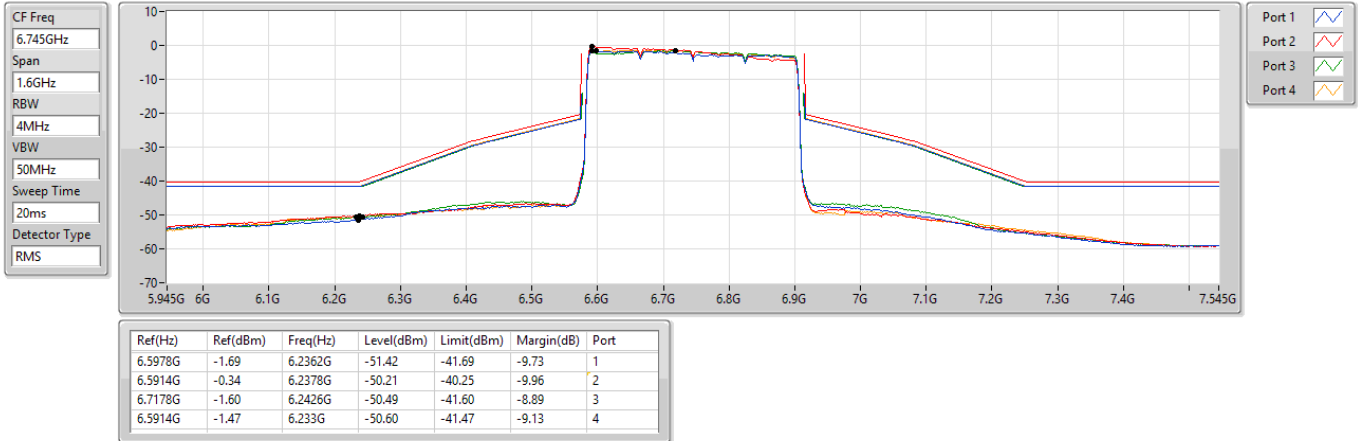

6.875-7.125GHz 802.11be EHT320_Nss4,(MCS0)_4TX

MASK

6905MHz Straddle 6.875-7.125GHz_TX

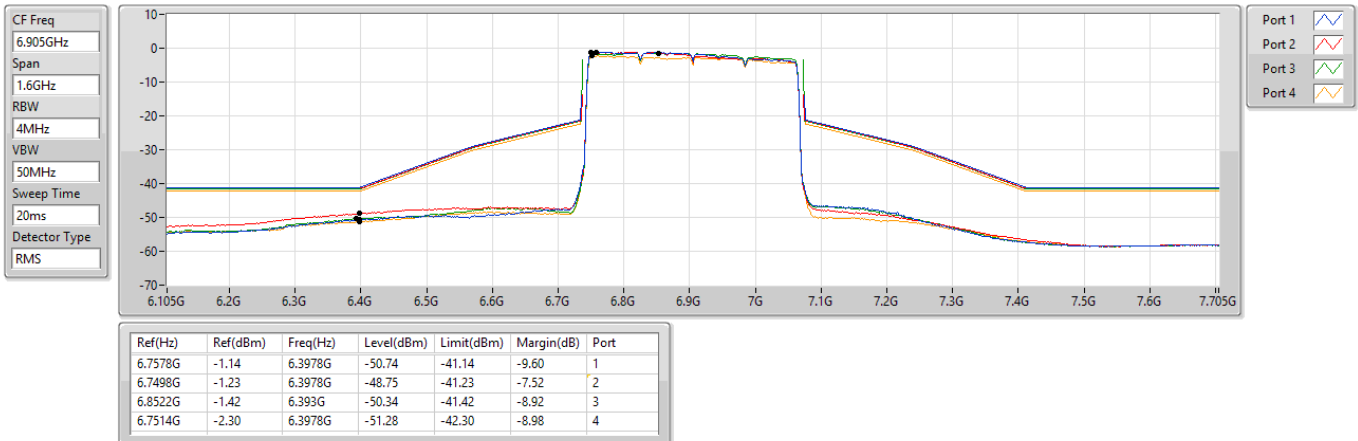

Frequency: 6475 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	0.90	1.08	0.73	1.04
T20°CVmin	1.16	1.27	1.06	1.35
T45°CVnom	2.24	2.41	2.48	2.45
T40°CVnom	2.36	2.11	2.59	2.32
T30°CVnom	1.76	1.61	1.83	2.08
T20°CVnom	0.98	0.75	0.99	0.59
T10°CVnom	2.35	2.93	2.56	2.41
T0°CVnom	5.08	4.56	4.47	4.25
T-10°CVnom	6.28	5.84	5.81	5.41
T-20°CVnom	8.96	8.74	8.89	8.46
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 45		Tmin [°C]: -20	

Frequency: 7015 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	0.84	0.58	1.04	1.04
T20°CVmin	1.17	1.65	1.36	1.44
T45°CVnom	1.99	1.92	2.28	2.39
T40°CVnom	2.52	3.13	2.67	2.73
T30°CVnom	1.81	2.18	2.43	2.21
T20°CVnom	0.95	1.20	0.73	0.71
T10°CVnom	2.63	2.77	2.25	2.64
T0°CVnom	5.15	5.01	5.19	5.11
T-10°CVnom	6.09	6.10	6.55	6.39
T-20°CVnom	8.15	8.36	8.34	8.26
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 45		Tmin [°C]: -20	

Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Antenna gain With path Loss (dBi)	Adjusted Power (dBm)	Detection limit (dBm)	EUT Tx Status
be EHT20	5	6195	6194	-71.32	6.19	-77.51	-62	Ceased
				-73.32	6.19	-79.51	-62	Minimal
				-91.32	6.19	-97.51	-62	Normal
	6	6475	6474	-69.65	5.7	-75.35	-62	Ceased
				-75.65	5.7	-81.35	-62	Minimal
				-89.65	5.7	-95.35	-62	Normal
	7	6695	6694	-69.87	5.7	-75.57	-62	Ceased
				-73.87	5.7	-79.57	-62	Minimal
				-89.87	5.7	-95.57	-62	Normal
	8	6995	6994	-69.7	5.73	-75.43	-62	Ceased
				-76	5.73	-81.73	-62	Minimal
				-89.7	5.73	-95.43	-62	Normal

Note: Adjusted Power = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)

Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Antenna gain with path Loss (dBi)	Adjusted Power (dBm)	Detection limit (dBm)	EUT Tx Status
be EHT320	5	6105	5950	-65.21	6.19	-71.4	-62	Ceased
				-66.71	6.19	-72.9	-62	Minimal
				-85.21	6.19	-91.4	-62	Normal
	6 / 7	6585	6430	-64.74	5.7	-70.44	-62	Ceased
				-67.24	5.7	-72.94	-62	Minimal
				-84.74	5.7	-90.44	-62	Normal
	7 / 8	6905	6750	-65.78	5.7	-71.48	-62	Ceased
				-68.98	5.7	-74.68	-62	Minimal
				-85.78	5.7	-91.48	-62	Normal


Note: Adjusted Power = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)

Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Adjusted Power (dBm)	1	2	3	4	5	6	7	8	9	10	Detection Probability (%)	Limit (%)
be EHT20	5	6195	6194	-71.32	-77.51	V	V	V	V	V	V	V	V	V	V	100	90
	6	6475	6474	-69.65	-75.35	V	V	V	V	V	V	V	V	V	V	100	90
	7	6695	6694	-69.87	-75.57	V	V	V	V	V	V	V	V	V	V	100	90
	8	6995	6994	-69.7	-75.43	V	V	V	V	V	V	V	V	V	V	100	90


Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Adjusted Power (dBm)	1	2	3	4	5	6	7	8	9	10	Detection Probability (%)	Limit (%)
be EHT320	5	6105	5950	-65.21	-71.4	V	V	V	V	V	V	V	V	V	V	100	90
			6100	-68.68	-74.87	V	V	V	V	V	V	V	V	V	V	100	90
			6260	-70.34	-76.53	V	V	V	V	V	V	V	V	V	V	100	90
	6 / 7	6585	6430	-64.74	-70.44	V	V	V	X	V	V	V	V	V	V	90	90
			6580	-67.99	-73.69	V	V	V	V	X	V	V	V	V	V	90	90
			6740	-69.05	-74.75	V	V	V	V	V	V	V	V	V	V	100	90
	7 / 8	6905	6750	-65.78	-71.48	V	V	V	V	V	V	V	V	V	V	100	90
			6900	-68.89	-74.59	V	V	V	V	V	V	V	V	V	V	100	90
			7060	-71.45	-77.15	V	V	V	V	V	V	V	V	V	V	100	90

Test plot of Incumbent signal


BW: 20 MHz / Frequency : 6194 MHz

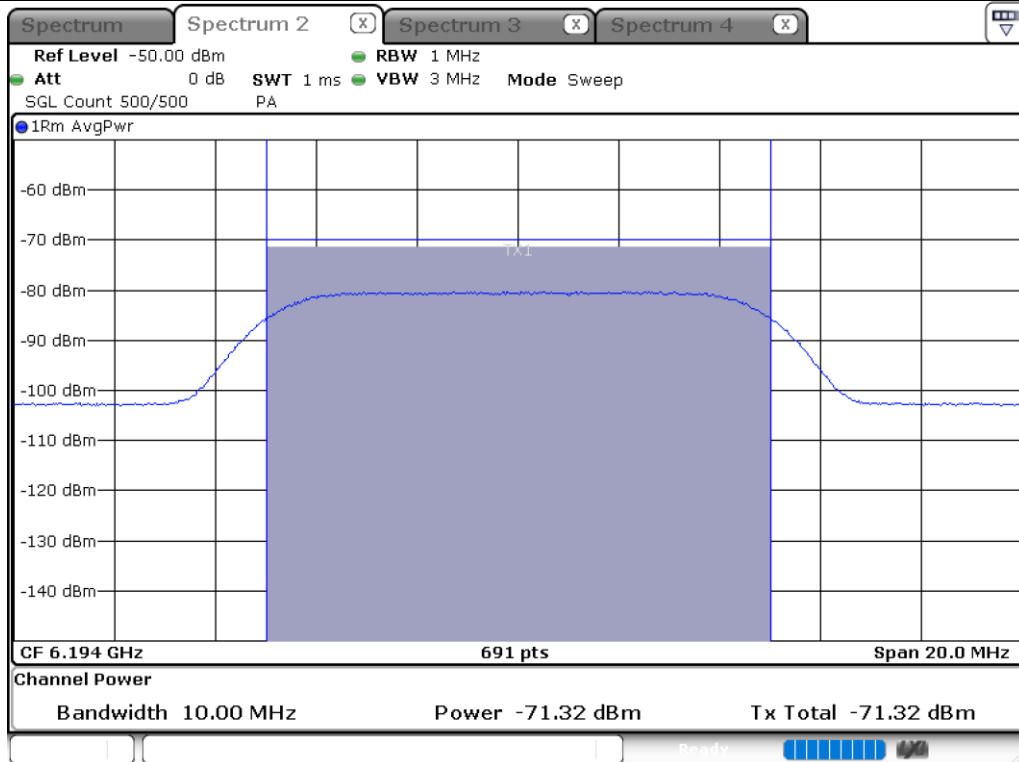


BW: 20 MHz / Frequency : 6474 MHz

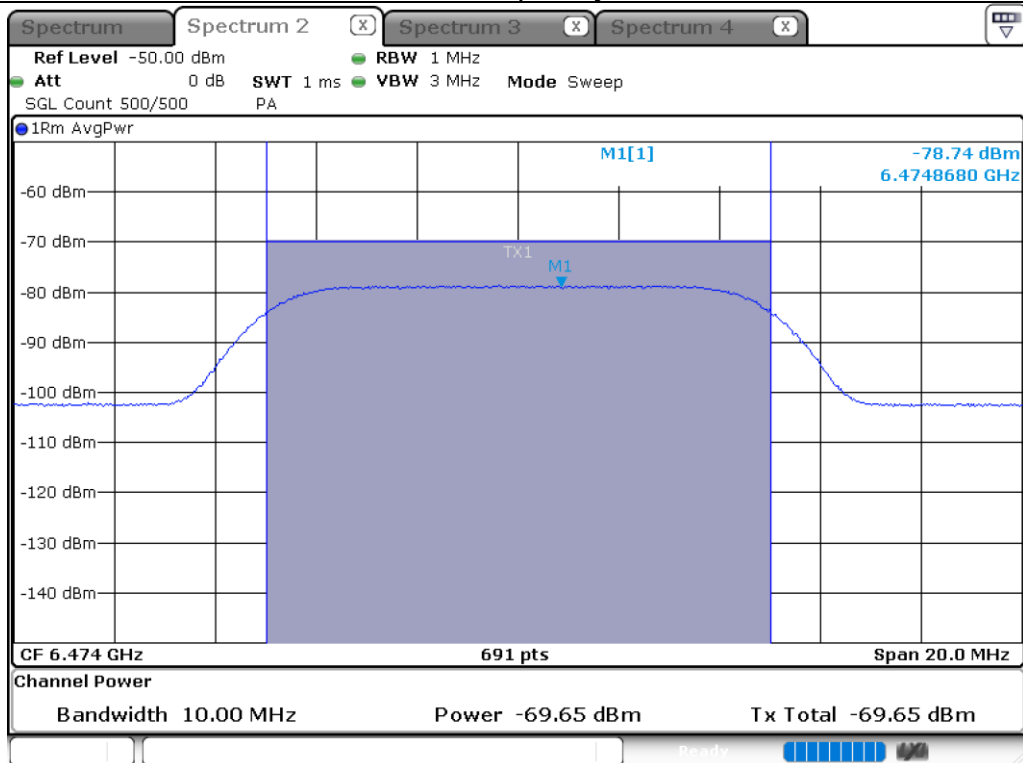


BW: 20 MHz / Frequency : 6694 MHz

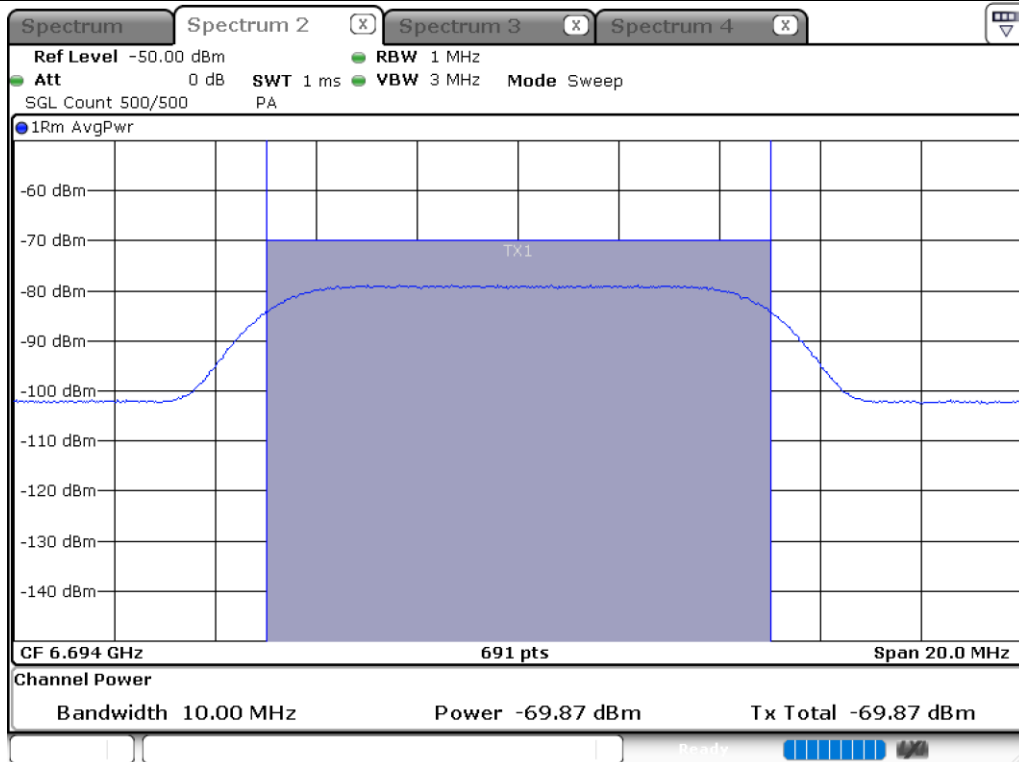


BW: 20 MHz / Frequency : 6994MHz

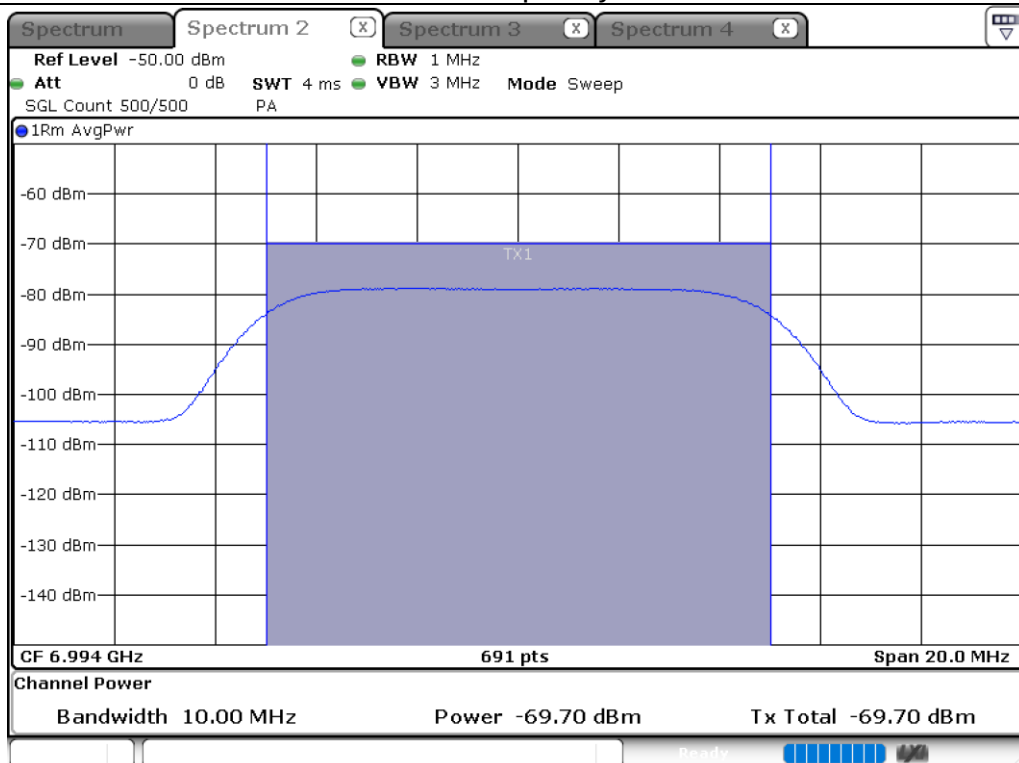


BW: 320 MHz / Frequency : 5950 MHz

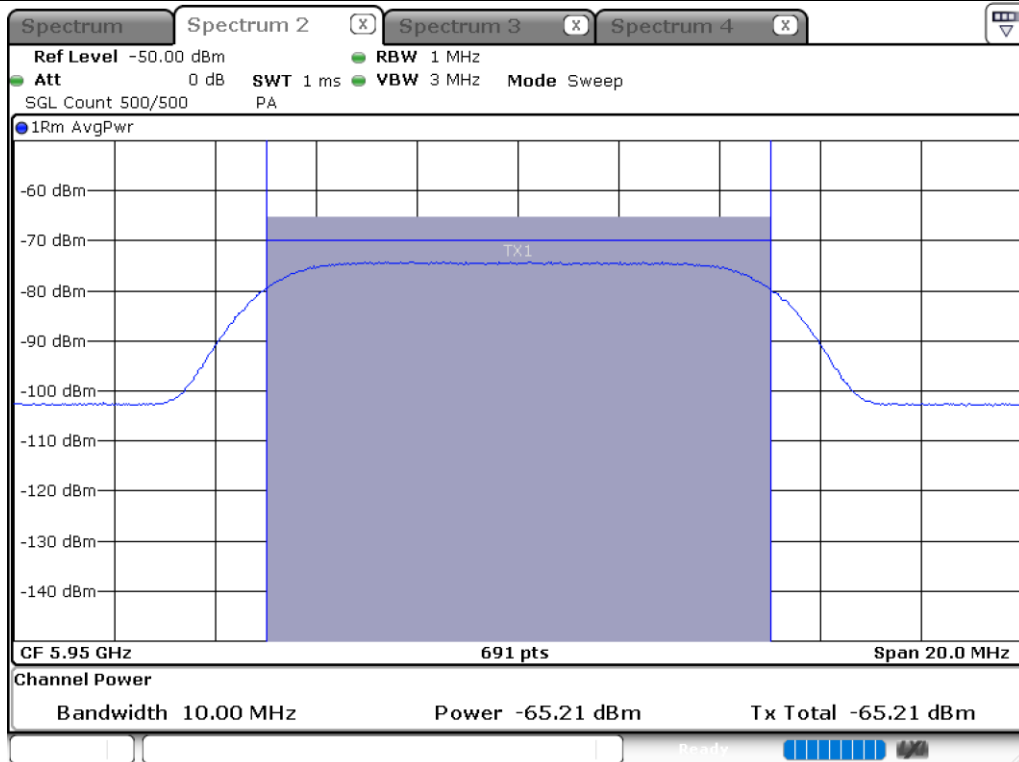

BW: 320 MHz / Frequency : 6100 MHz

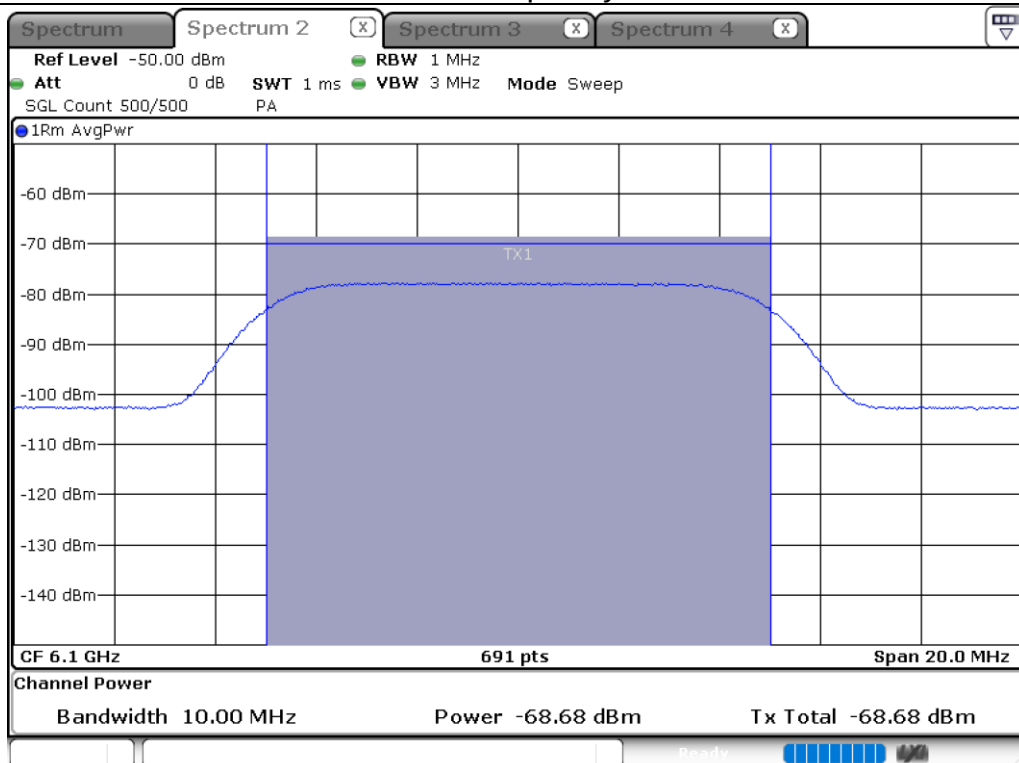

BW: 320 MHz / Frequency : 6260 MHz

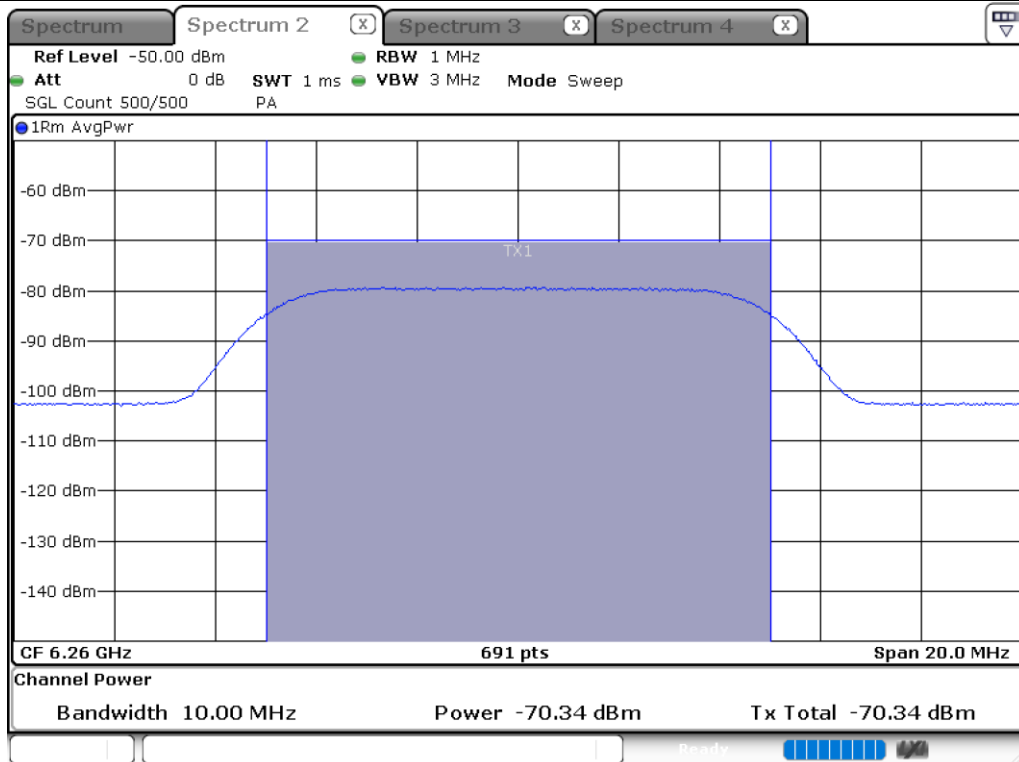

BW: 320 MHz / Frequency : 6430 MHz

