




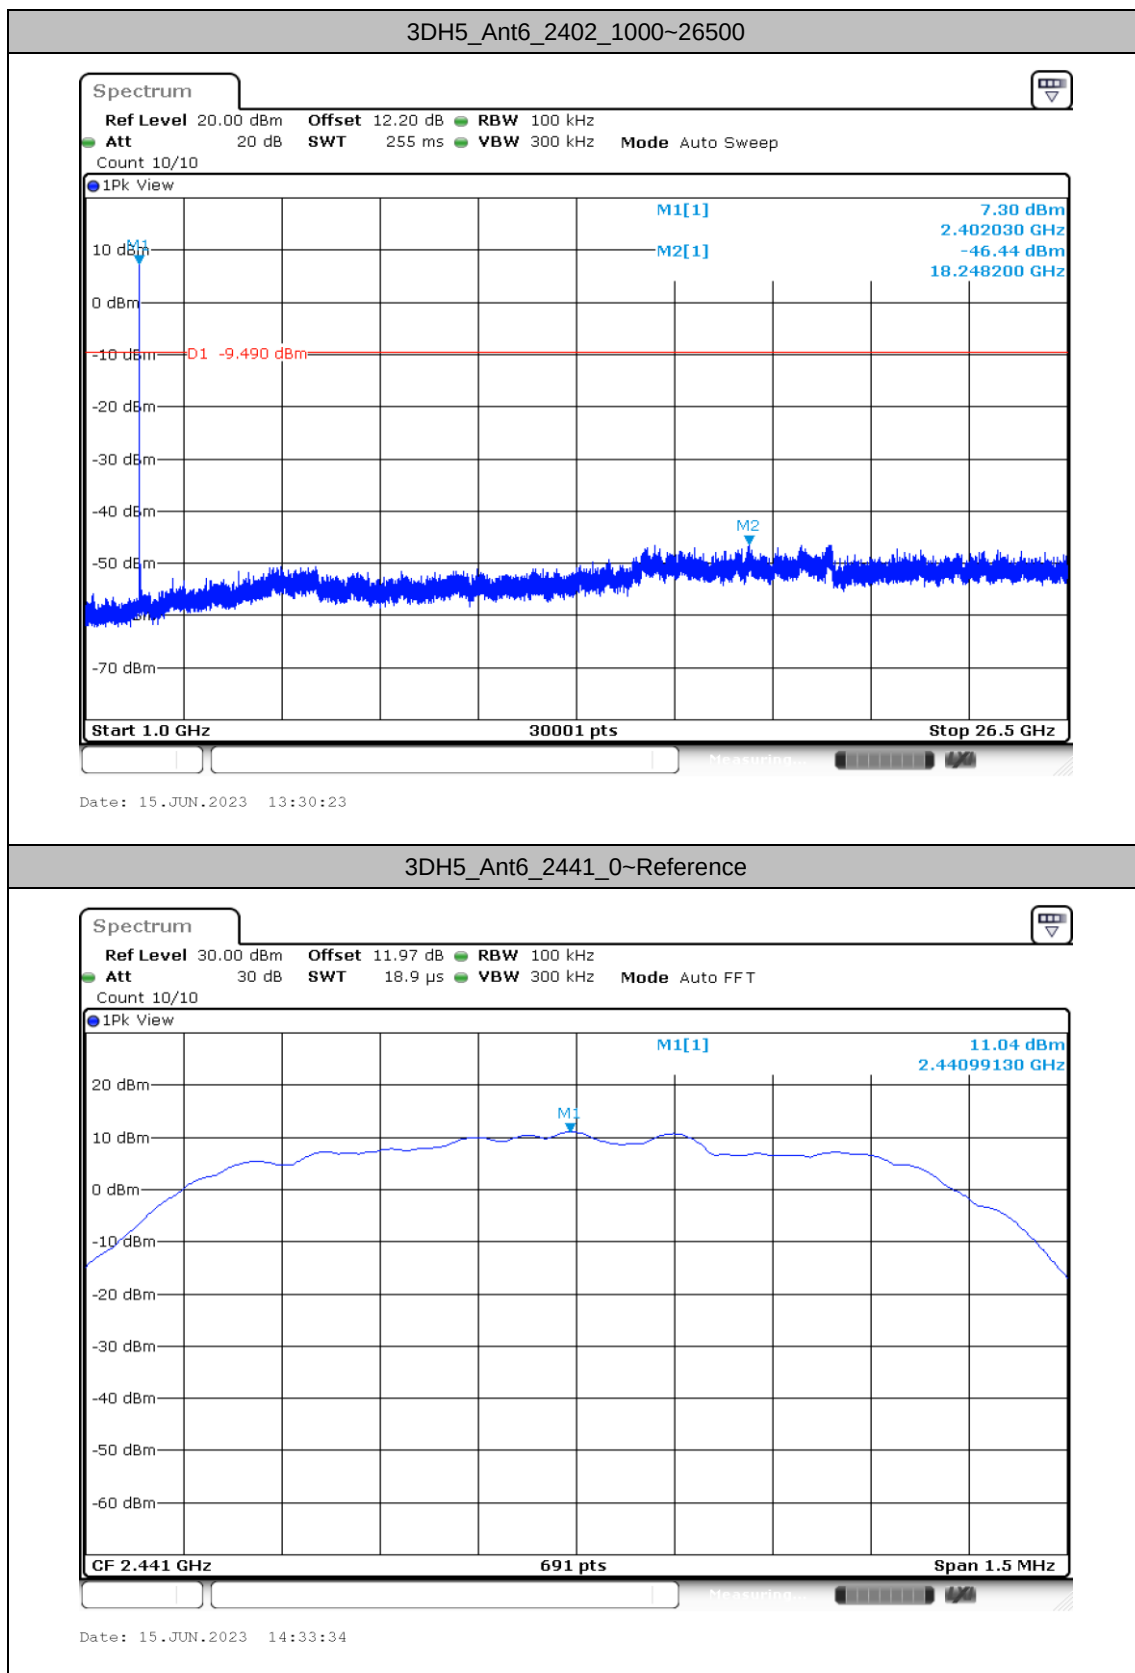


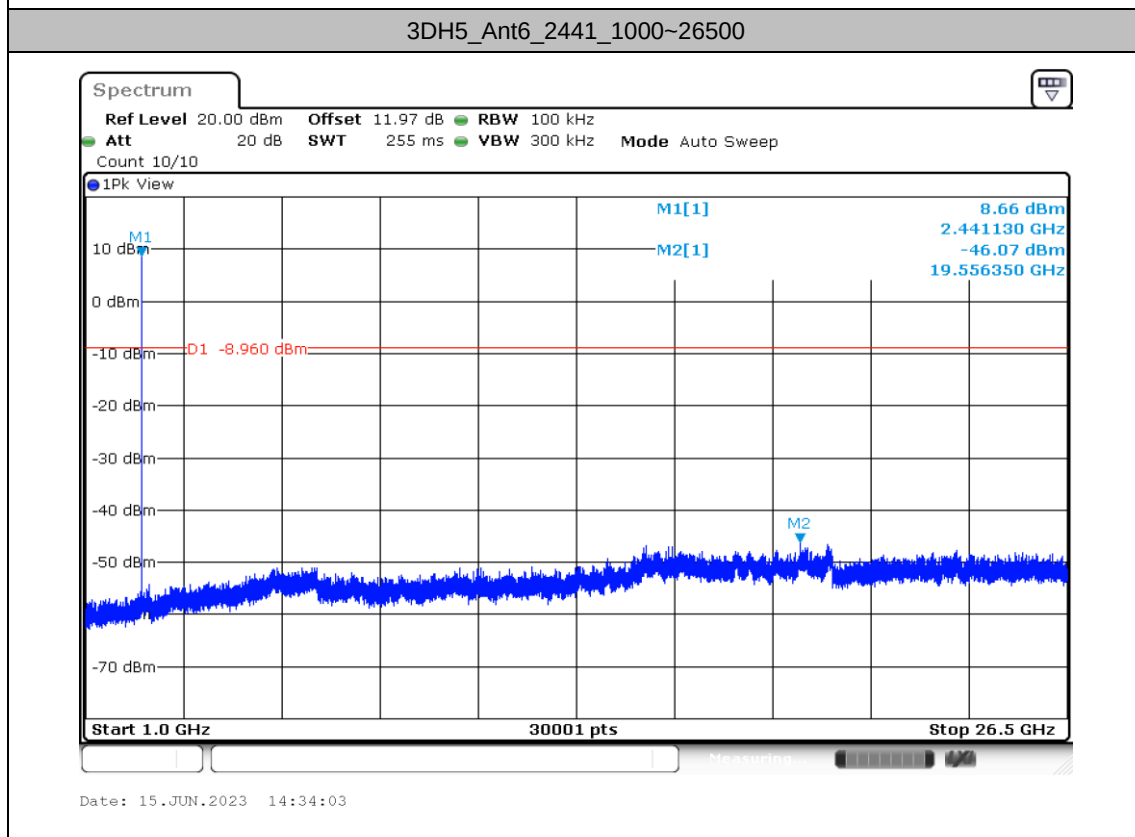

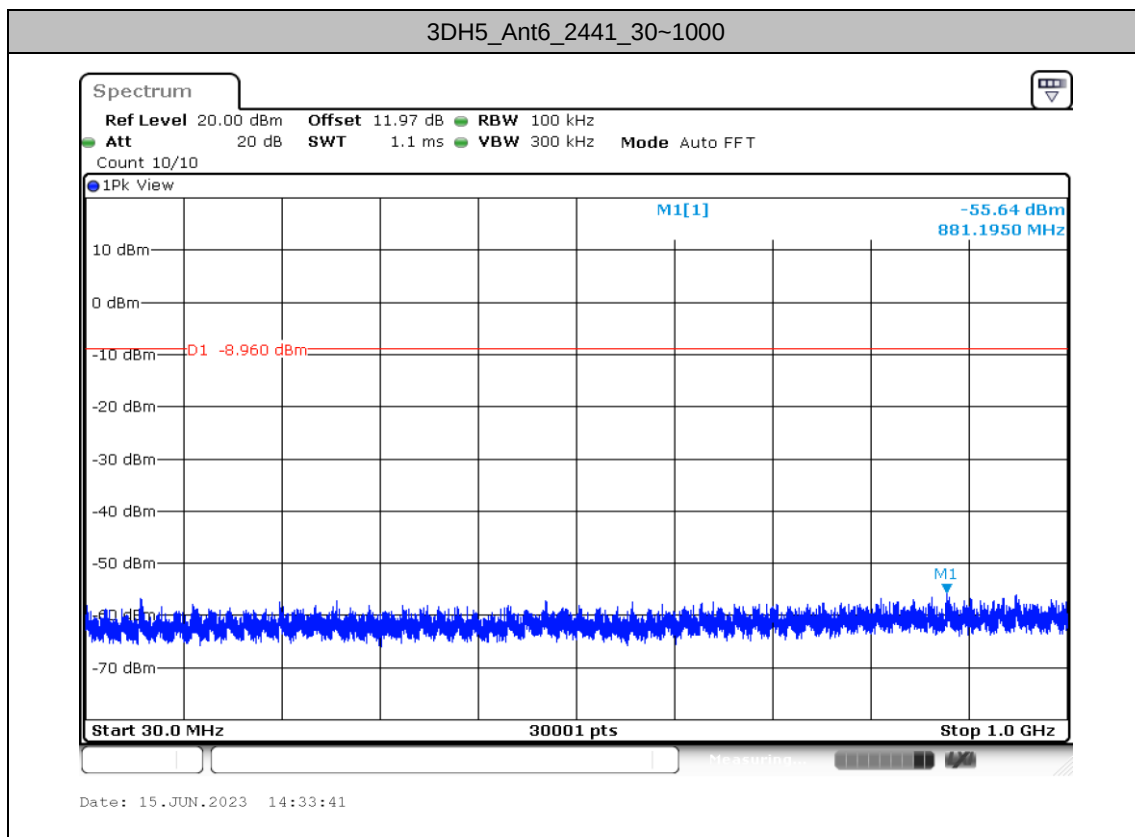

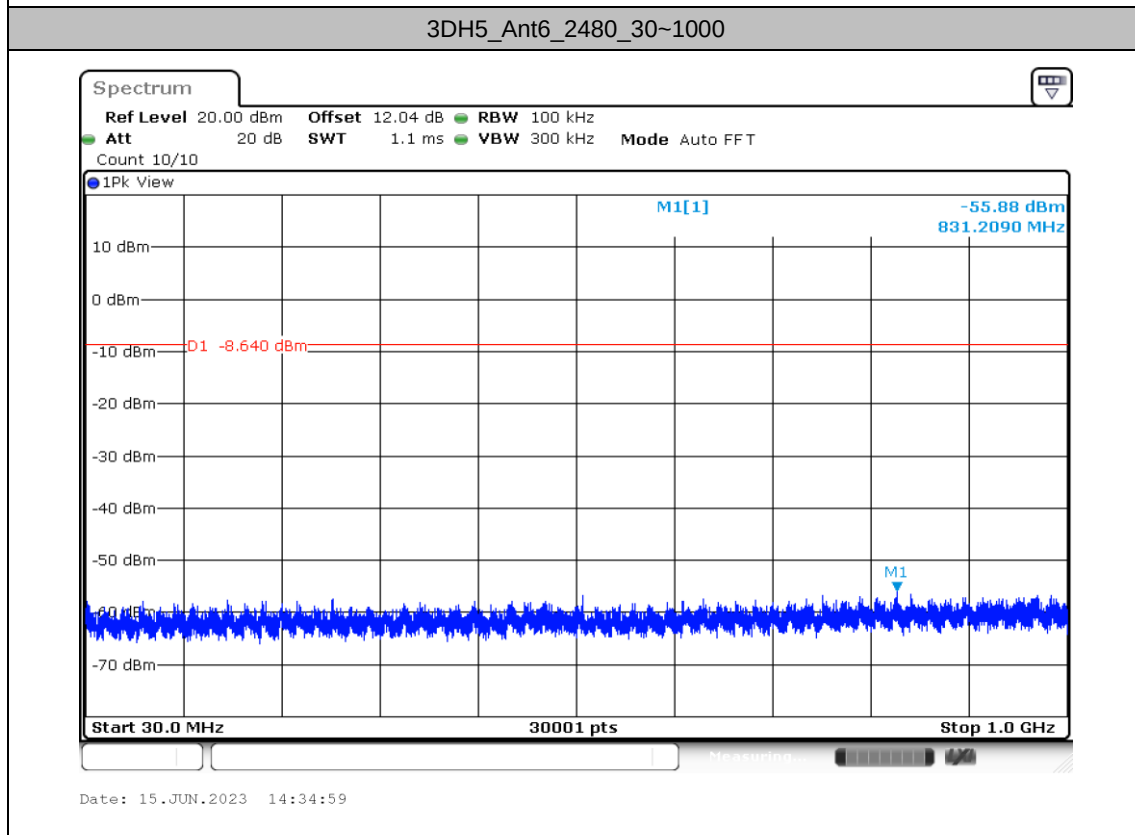


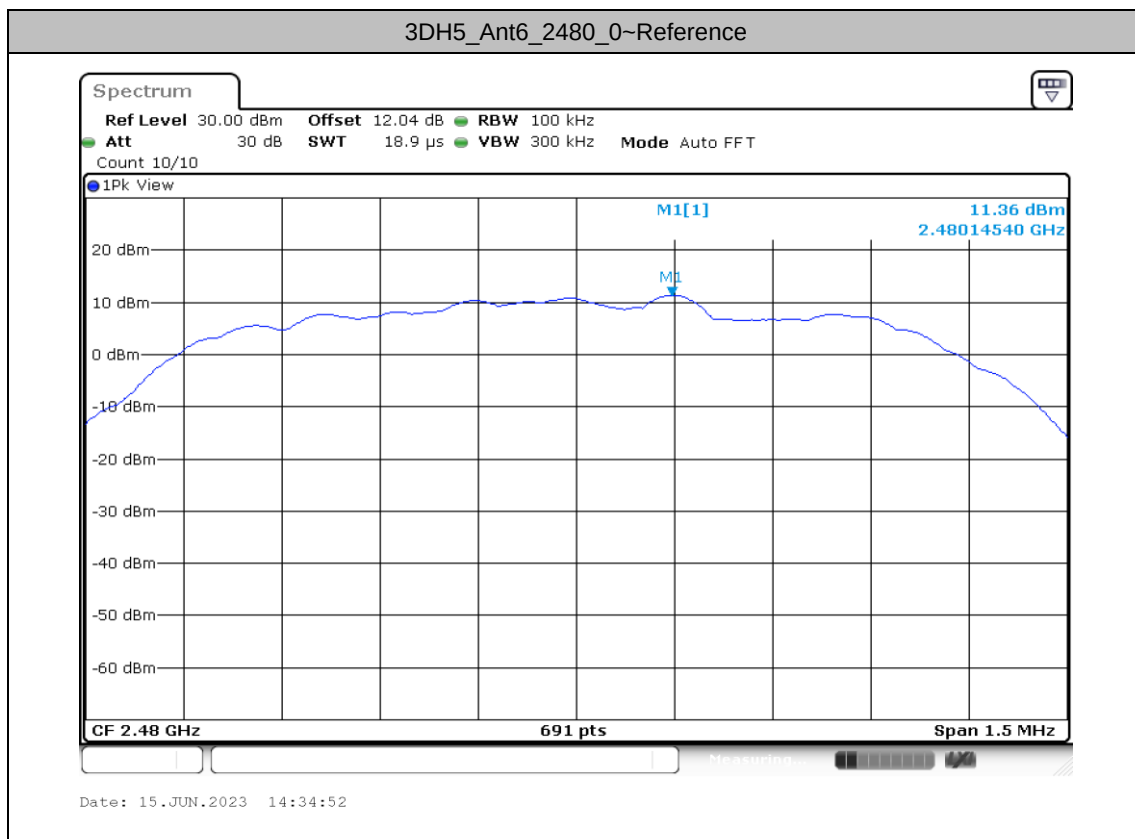

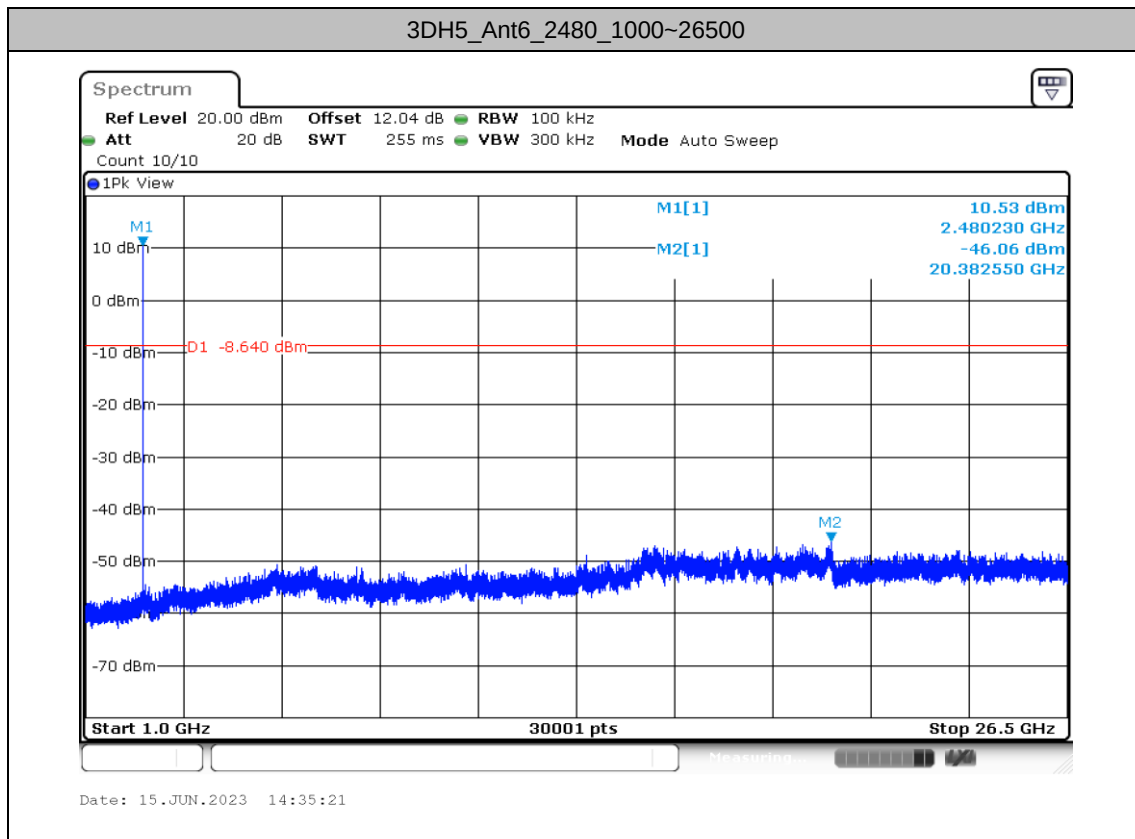

Appendix B. AC Conducted Emission Test Results

Test Engineer :	Lily Qiu	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

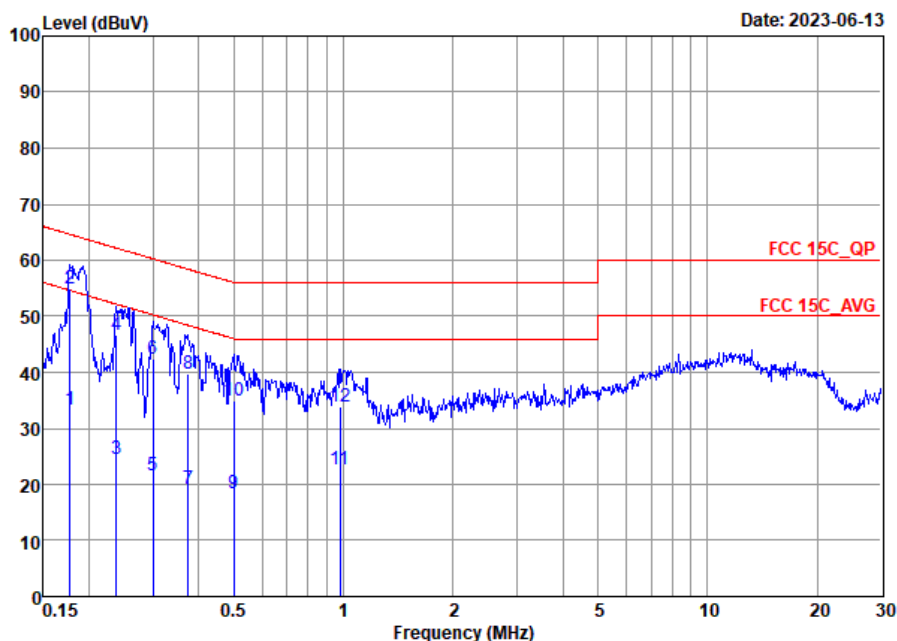


Site : CO01-SZ
Condition: FCC 15C_QP LISN_20230420_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.18	33.40	-21.19	54.59	12.80	10.46	10.14	Average
2 *	0.18	54.90	-9.69	64.59	34.30	10.46	10.14	QP
3	0.24	24.44	-27.73	52.17	3.90	10.39	10.15	Average
4	0.24	46.54	-15.63	62.17	26.00	10.39	10.15	QP
5	0.30	21.72	-28.52	50.24	1.20	10.37	10.15	Average
6	0.30	42.42	-17.82	60.24	21.90	10.37	10.15	QP
7	0.38	19.25	-29.14	48.39	-1.20	10.29	10.16	Average
8	0.38	39.85	-18.54	58.39	19.40	10.29	10.16	QP
9	0.50	18.42	-27.59	46.01	-2.00	10.26	10.16	Average
10	0.50	34.92	-21.09	56.01	14.50	10.26	10.16	QP
11	0.98	22.60	-23.40	46.00	2.20	10.24	10.16	Average
12	0.98	34.00	-22.00	56.00	13.60	10.24	10.16	QP



Test Engineer :	Lily Qiu	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

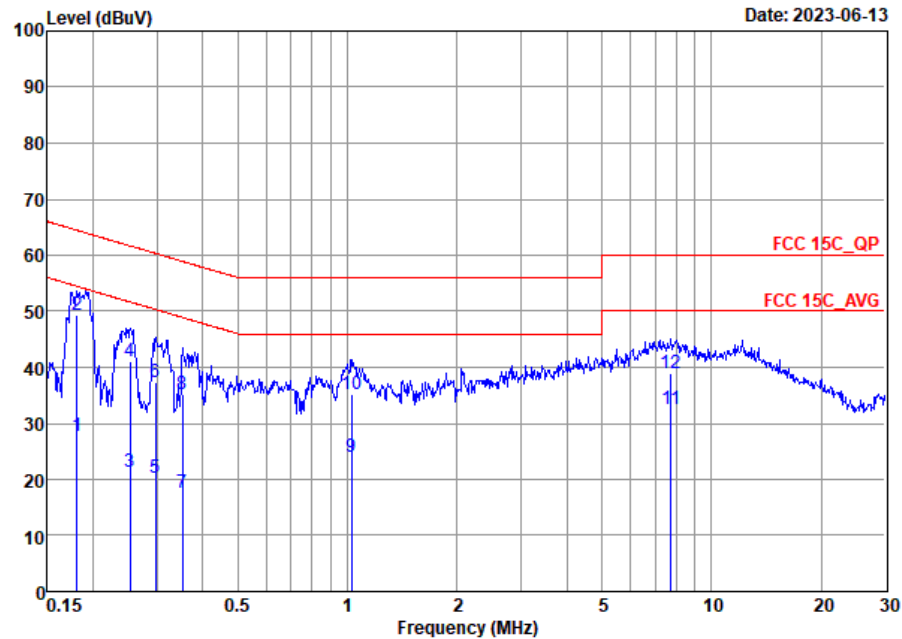

Site : C001-SZ
Condition: FCC 15C_QP LISN_20230420_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.18	27.84	-26.62	54.46	7.30	10.40	10.14	Average
2 *	0.18	49.44	-15.02	64.46	28.90	10.40	10.14	QP
3	0.25	21.27	-30.37	51.64	0.80	10.32	10.15	Average
4	0.25	40.97	-20.67	61.64	20.50	10.32	10.15	QP
5	0.30	20.26	-30.06	50.32	-0.20	10.31	10.15	Average
6	0.30	37.36	-22.96	60.32	16.90	10.31	10.15	QP
7	0.35	17.61	-31.30	48.91	-2.80	10.25	10.16	Average
8	0.35	35.31	-23.60	58.91	14.90	10.25	10.16	QP
9	1.03	24.01	-21.99	46.00	3.60	10.25	10.16	Average
10	1.03	35.11	-20.89	56.00	14.70	10.25	10.16	QP
11	7.73	32.61	-17.39	50.00	12.20	10.04	10.37	Average
12	7.73	38.81	-21.19	60.00	18.40	10.04	10.37	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Zhaohui Liang	Relative Humidity :	48~49%
		Temperature :	24~25°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	6	Bluetooth BR_GFSK	00	2402	DH5	-	-
Mode 2	2400-2483.5	6	Bluetooth BR_GFSK	39	2441	DH5	-	-
Mode 3	2400-2483.5	6	Bluetooth BR_GFSK	78	2480	DH5	-	-
Mode 4	2400-2483.5	6	Bluetooth BR_GFSK	78	2480	DH5	-	LF

Note: Only the worst case has assessed LF mode to test.



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth BR_GFSK	00	2367.41	53.81	74.00	-20.19	V	PEAK	Pass	Band Edge
1	Bluetooth BR_GFSK	00	4804.00	45.35	74.00	-28.65	V	Peak	Pass	Harmonic
2	Bluetooth BR_GFSK	39	-	-	-	-	-	-	-	Band Edge
2	Bluetooth BR_GFSK	39	7323.00	48.06	74.00	-25.94	V	Peak	Pass	Harmonic
3	Bluetooth BR_GFSK	78	2483.54	61.07	74.00	-12.93	V	PEAK	Pass	Band Edge
3	Bluetooth BR_GFSK	78	7440.00	47.99	74.00	-26.01	H	Peak	Pass	Harmonic
4	Bluetooth BR_GFSK	78	846.7401	31.11	46	-14.89	H	Peak	Pass	LF



Mode	1																																																																
	Band Edge																																																																
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																
ANT	6																																																																
Pol.	Horizontal																																																																
Peak Avg	Level (dBuV/m) Date: 2023-06-16 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2377.99</td><td>50.89</td><td>74.00</td><td>-23.11</td><td>43.01</td><td>32.23</td><td>7.73</td><td>32.08</td><td>379</td><td>227</td><td>PEAK</td></tr><tr><td>2</td><td>2377.99</td><td>26.10</td><td>54.00</td><td>-27.90</td><td>18.22</td><td>32.23</td><td>7.73</td><td>32.08</td><td>379</td><td>227</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2377.99	50.89	74.00	-23.11	43.01	32.23	7.73	32.08	379	227	PEAK	2	2377.99	26.10	54.00	-27.90	18.22	32.23	7.73	32.08	379	227	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																									
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	2377.99	50.89	74.00	-23.11	43.01	32.23	7.73	32.08	379	227	PEAK																																																						
2	2377.99	26.10	54.00	-27.90	18.22	32.23	7.73	32.08	379	227	AVERAGE																																																						
Fundamental	Level (dBuV/m) Date: 2023-06-16 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>107.10</td><td>-----</td><td>-----</td><td>99.11</td><td>32.28</td><td>7.79</td><td>32.08</td><td>379</td><td>227</td><td>PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>82.31</td><td>-----</td><td>-----</td><td>74.32</td><td>32.28</td><td>7.79</td><td>32.08</td><td>379</td><td>227</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2402.00	107.10	-----	-----	99.11	32.28	7.79	32.08	379	227	PEAK	2	2402.00	82.31	-----	-----	74.32	32.28	7.79	32.08	379	227	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																									
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	2402.00	107.10	-----	-----	99.11	32.28	7.79	32.08	379	227	PEAK																																																						
2	2402.00	82.31	-----	-----	74.32	32.28	7.79	32.08	379	227	AVERAGE																																																						

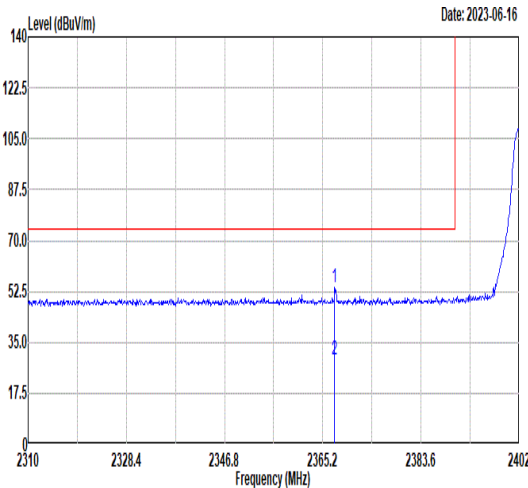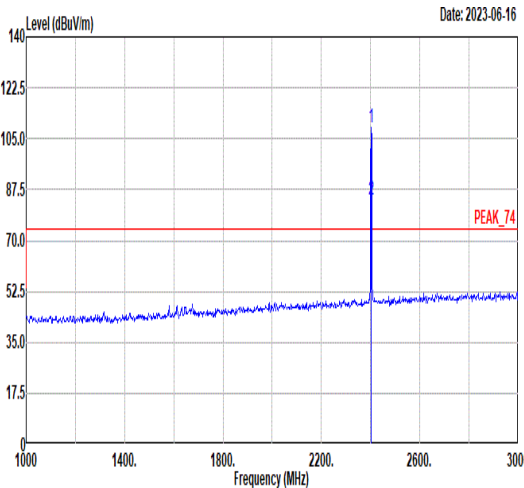

Mode	1																																																																																																																			
	Band Edge																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																			
ANT	6																																																																																																																			
Pol.	Vertical						Fundamental																																																																																																													
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2367.41</td><td>53.81</td><td>74.00</td><td>-20.19</td><td>45.97</td><td>32.21</td><td>7.70</td><td>32.07</td><td>295</td><td>268</td><td>PEAK</td></tr><tr><td>2</td><td>2367.41</td><td>29.02</td><td>54.00</td><td>-24.98</td><td>21.18</td><td>32.21</td><td>7.70</td><td>32.07</td><td>295</td><td>268</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2367.41	53.81	74.00	-20.19	45.97	32.21	7.70	32.07	295	268	PEAK	2	2367.41	29.02	54.00	-24.98	21.18	32.21	7.70	32.07	295	268	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>108.75</td><td>-----</td><td>-----</td><td>100.76</td><td>32.28</td><td>7.79</td><td>32.08</td><td>295</td><td>268</td><td>PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>83.96</td><td>-----</td><td>-----</td><td>75.97</td><td>32.28</td><td>7.79</td><td>32.08</td><td>295</td><td>268</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2402.00	108.75	-----	-----	100.76	32.28	7.79	32.08	295	268	PEAK	2	2402.00	83.96	-----	-----	75.97	32.28	7.79	32.08	295	268	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	2367.41	53.81	74.00	-20.19	45.97	32.21	7.70	32.07	295	268	PEAK																																																																																																									
2	2367.41	29.02	54.00	-24.98	21.18	32.21	7.70	32.07	295	268	AVERAGE																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	2402.00	108.75	-----	-----	100.76	32.28	7.79	32.08	295	268	PEAK																																																																																																									
2	2402.00	83.96	-----	-----	75.97	32.28	7.79	32.08	295	268	AVERAGE																																																																																																									





Mode	1																																																																
	Harmonic																																																																
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																
ANT	6																																																																
Pol.	Horizontal																																																																
Peak Avg	Level (dBuV/m) Date: 2023-06-16 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 300060009000120001500018000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>44.34</td><td>74.00</td><td>-29.66</td><td>50.03</td><td>34.82</td><td>11.07</td><td>51.58</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4804.00</td><td>19.55</td><td>54.00</td><td>-34.45</td><td>25.24</td><td>34.82</td><td>11.07</td><td>51.58</td><td>---</td><td>---</td><td>Average</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	44.34	74.00	-29.66	50.03	34.82	11.07	51.58	---	---	Peak	2	4804.00	19.55	54.00	-34.45	25.24	34.82	11.07	51.58	---	---	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																									
		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																							
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																						
1	4804.00	44.34	74.00	-29.66	50.03	34.82	11.07	51.58	---	---	Peak																																																						
2	4804.00	19.55	54.00	-34.45	25.24	34.82	11.07	51.58	---	---	Average																																																						
Vertical																																																																	
Level (dBuV/m) Date: 2023-06-16 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 300060009000120001500018000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>45.35</td><td>74.00</td><td>-28.65</td><td>51.04</td><td>34.82</td><td>11.07</td><td>51.58</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4804.00</td><td>20.56</td><td>54.00</td><td>-33.44</td><td>26.25</td><td>34.82</td><td>11.07</td><td>51.58</td><td>---</td><td>---</td><td>Average</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	45.35	74.00	-28.65	51.04	34.82	11.07	51.58	---	---	Peak	2	4804.00	20.56	54.00	-33.44	26.25	34.82	11.07	51.58	---	---	Average	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	4804.00	45.35	74.00	-28.65	51.04	34.82	11.07	51.58	---	---	Peak																																																						
2	4804.00	20.56	54.00	-33.44	26.25	34.82	11.07	51.58	---	---	Average																																																						





Mode	2																																																																																						
	Harmonic																																																																																						
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																						
ANT	6																																																																																						
Pol.	Horizontal																																																																																						
Peak Avg	Level (dBuV/m) Date: 2023-06-16 Frequency (MHz)																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>45.07</td><td>74.00</td><td>-28.93</td><td>50.70</td><td>34.85</td><td>11.10</td><td>51.58</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4882.00</td><td>20.28</td><td>54.00</td><td>-33.72</td><td>25.91</td><td>34.85</td><td>11.10</td><td>51.58</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>3</td><td>7323.00</td><td>47.88</td><td>74.00</td><td>-26.12</td><td>49.63</td><td>36.33</td><td>13.09</td><td>51.17</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7323.00</td><td>23.09</td><td>54.00</td><td>-30.91</td><td>24.84</td><td>36.33</td><td>13.09</td><td>51.17</td><td>---</td><td>---</td><td>Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4882.00	45.07	74.00	-28.93	50.70	34.85	11.10	51.58	---	---	Peak	2	4882.00	20.28	54.00	-33.72	25.91	34.85	11.10	51.58	---	---	Average	3	7323.00	47.88	74.00	-26.12	49.63	36.33	13.09	51.17	---	---	Peak	4	7323.00	23.09	54.00	-30.91	24.84	36.33	13.09	51.17	---	---	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	4882.00	45.07	74.00	-28.93	50.70	34.85	11.10	51.58	---	---	Peak																																																																												
2	4882.00	20.28	54.00	-33.72	25.91	34.85	11.10	51.58	---	---	Average																																																																												
3	7323.00	47.88	74.00	-26.12	49.63	36.33	13.09	51.17	---	---	Peak																																																																												
4	7323.00	23.09	54.00	-30.91	24.84	36.33	13.09	51.17	---	---	Average																																																																												
Level (dBuV/m) Date: 2023-06-16 Frequency (MHz)																																																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>46.32</td><td>74.00</td><td>-27.68</td><td>51.95</td><td>34.85</td><td>11.10</td><td>51.58</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4882.00</td><td>21.53</td><td>54.00</td><td>-32.47</td><td>27.16</td><td>34.85</td><td>11.10</td><td>51.58</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>3</td><td>7323.00</td><td>48.06</td><td>74.00</td><td>-25.94</td><td>49.81</td><td>36.33</td><td>13.09</td><td>51.17</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7323.00</td><td>23.27</td><td>54.00</td><td>-30.73</td><td>25.02</td><td>36.33</td><td>13.09</td><td>51.17</td><td>---</td><td>---</td><td>Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4882.00	46.32	74.00	-27.68	51.95	34.85	11.10	51.58	---	---	Peak	2	4882.00	21.53	54.00	-32.47	27.16	34.85	11.10	51.58	---	---	Average	3	7323.00	48.06	74.00	-25.94	49.81	36.33	13.09	51.17	---	---	Peak	4	7323.00	23.27	54.00	-30.73	25.02	36.33	13.09	51.17	---	---	Average	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	4882.00	46.32	74.00	-27.68	51.95	34.85	11.10	51.58	---	---	Peak																																																																												
2	4882.00	21.53	54.00	-32.47	27.16	34.85	11.10	51.58	---	---	Average																																																																												
3	7323.00	48.06	74.00	-25.94	49.81	36.33	13.09	51.17	---	---	Peak																																																																												
4	7323.00	23.27	54.00	-30.73	25.02	36.33	13.09	51.17	---	---	Average																																																																												

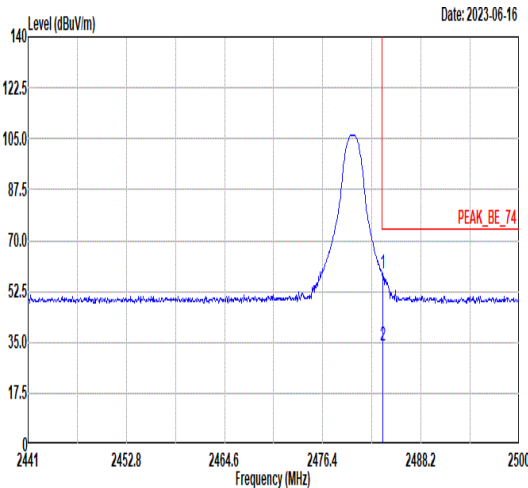
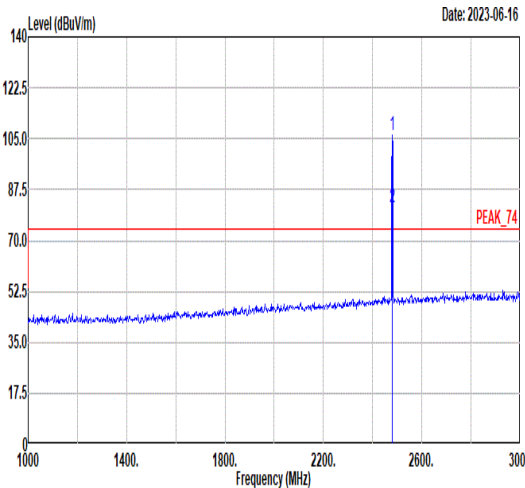


Mode	3																																																																																																																			
	Band Edge																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																			
ANT	6																																																																																																																			
Pol.	Horizontal						Fundamental																																																																																																													
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.60</td><td>58.48</td><td>74.00</td><td>-15.52</td><td>50.24</td><td>32.46</td><td>7.88</td><td>32.10</td><td>394</td><td>230</td><td>PEAK</td></tr><tr><td>2</td><td>2483.60</td><td>33.69</td><td>54.00</td><td>-20.31</td><td>25.45</td><td>32.46</td><td>7.88</td><td>32.10</td><td>394</td><td>230</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.60	58.48	74.00	-15.52	50.24	32.46	7.88	32.10	394	230	PEAK	2	2483.60	33.69	54.00	-20.31	25.45	32.46	7.88	32.10	394	230	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>105.95</td><td>-----</td><td>-----</td><td>97.72</td><td>32.46</td><td>7.87</td><td>32.10</td><td>394</td><td>230</td><td>PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>81.16</td><td>-----</td><td>-----</td><td>72.93</td><td>32.46</td><td>7.87</td><td>32.10</td><td>394</td><td>230</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2480.00	105.95	-----	-----	97.72	32.46	7.87	32.10	394	230	PEAK	2	2480.00	81.16	-----	-----	72.93	32.46	7.87	32.10	394	230	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	2483.60	58.48	74.00	-15.52	50.24	32.46	7.88	32.10	394	230	PEAK																																																																																																									
2	2483.60	33.69	54.00	-20.31	25.45	32.46	7.88	32.10	394	230	AVERAGE																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	2480.00	105.95	-----	-----	97.72	32.46	7.87	32.10	394	230	PEAK																																																																																																									
2	2480.00	81.16	-----	-----	72.93	32.46	7.87	32.10	394	230	AVERAGE																																																																																																									

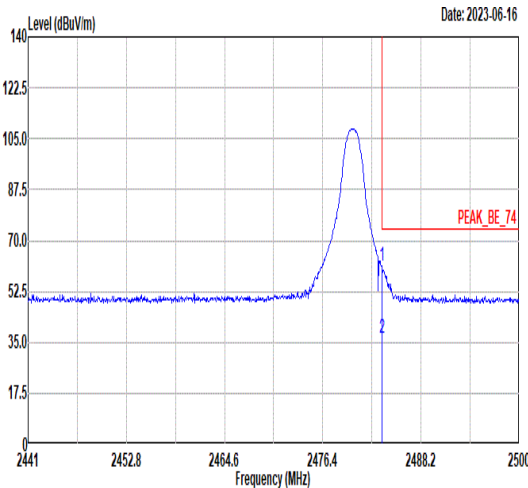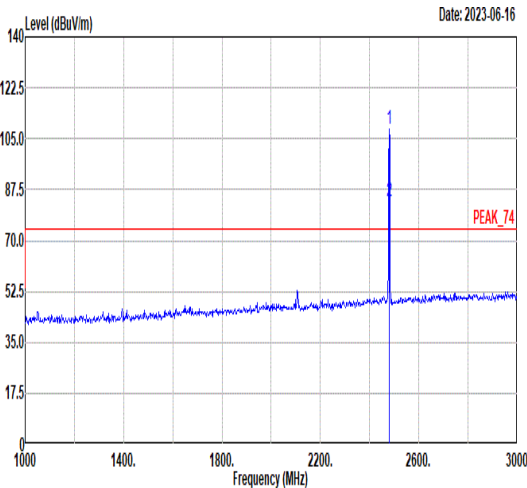



Mode	3																																																																																																							
	Band Edge																																																																																																							
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																							
ANT	6																																																																																																							
Pol.	Vertical	Fundamental																																																																																																						
Peak Avg	Date: 2023-06-16 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.54</td><td>61.07</td><td>74.00</td><td>-12.93</td><td>52.83</td><td>32.46</td><td>7.88</td><td>32.10</td><td>284</td><td>268</td><td>PEAK</td></tr><tr><td>2</td><td>2483.54</td><td>36.28</td><td>54.00</td><td>-17.72</td><td>28.04</td><td>32.46</td><td>7.88</td><td>32.10</td><td>284</td><td>268</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.54	61.07	74.00	-12.93	52.83	32.46	7.88	32.10	284	268	PEAK	2	2483.54	36.28	54.00	-17.72	28.04	32.46	7.88	32.10	284	268	AVERAGE	Date: 2023-06-16 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>108.40</td><td>-----</td><td>-----</td><td>100.17</td><td>32.46</td><td>7.87</td><td>32.10</td><td>284</td><td>268</td><td>PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>83.61</td><td>-----</td><td>-----</td><td>75.38</td><td>32.46</td><td>7.87</td><td>32.10</td><td>284</td><td>268</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	108.40	-----	-----	100.17	32.46	7.87	32.10	284	268	PEAK	2	2480.00	83.61	-----	-----	75.38	32.46	7.87	32.10	284	268	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	2483.54	61.07	74.00	-12.93	52.83	32.46	7.88	32.10	284	268	PEAK																																																																																													
2	2483.54	36.28	54.00	-17.72	28.04	32.46	7.88	32.10	284	268	AVERAGE																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	2480.00	108.40	-----	-----	100.17	32.46	7.87	32.10	284	268	PEAK																																																																																													
2	2480.00	83.61	-----	-----	75.38	32.46	7.87	32.10	284	268	AVERAGE																																																																																													

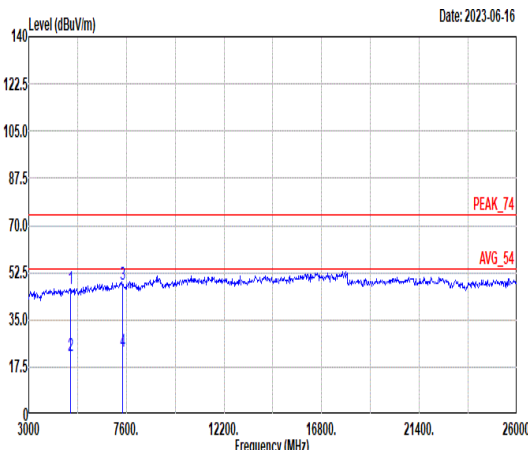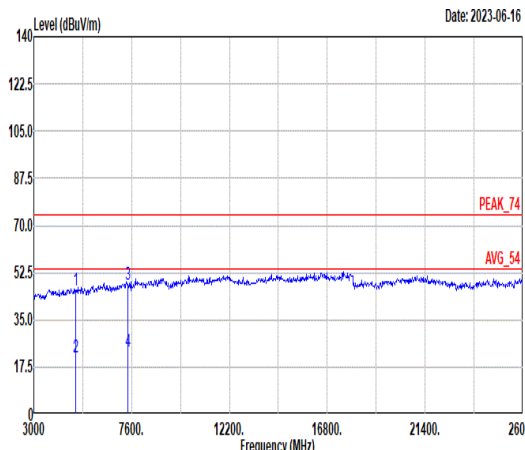

Mode	3																																																																																																																															
	Harmonic																																																																																																																															
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																															
ANT	6																																																																																																																															
Pol.	Horizontal	Vertical																																																																																																																														
Peak Avg	Date: 2023-06-16 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4960.00</td><td>46.65</td><td>74.00</td><td>-27.35</td><td>52.21</td><td>34.88</td><td>11.14</td><td>51.58 --- Peak</td></tr><tr><td>2</td><td>4960.00</td><td>21.86</td><td>54.00</td><td>-32.14</td><td>27.42</td><td>34.88</td><td>11.14</td><td>51.58 --- Average</td></tr><tr><td>3</td><td>7440.00</td><td>47.99</td><td>74.00</td><td>-26.01</td><td>49.83</td><td>36.38</td><td>12.97</td><td>51.19 --- Peak</td></tr><tr><td>4</td><td>7440.00</td><td>23.20</td><td>54.00</td><td>-30.80</td><td>25.04</td><td>36.38</td><td>12.97</td><td>51.19 --- Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	4960.00	46.65	74.00	-27.35	52.21	34.88	11.14	51.58 --- Peak	2	4960.00	21.86	54.00	-32.14	27.42	34.88	11.14	51.58 --- Average	3	7440.00	47.99	74.00	-26.01	49.83	36.38	12.97	51.19 --- Peak	4	7440.00	23.20	54.00	-30.80	25.04	36.38	12.97	51.19 --- Average	Date: 2023-06-16 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4960.00</td><td>45.80</td><td>74.00</td><td>-28.20</td><td>51.36</td><td>34.88</td><td>11.14</td><td>51.58 --- Peak</td></tr><tr><td>2</td><td>4960.00</td><td>21.01</td><td>54.00</td><td>-32.99</td><td>26.57</td><td>34.88</td><td>11.14</td><td>51.58 --- Average</td></tr><tr><td>3</td><td>7440.00</td><td>47.89</td><td>74.00</td><td>-26.11</td><td>49.73</td><td>36.38</td><td>12.97</td><td>51.19 --- Peak</td></tr><tr><td>4</td><td>7440.00</td><td>23.10</td><td>54.00</td><td>-30.90</td><td>24.94</td><td>36.38</td><td>12.97</td><td>51.19 --- Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	4960.00	45.80	74.00	-28.20	51.36	34.88	11.14	51.58 --- Peak	2	4960.00	21.01	54.00	-32.99	26.57	34.88	11.14	51.58 --- Average	3	7440.00	47.89	74.00	-26.11	49.73	36.38	12.97	51.19 --- Peak	4	7440.00	23.10	54.00	-30.90	24.94	36.38	12.97	51.19 --- Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																																																								
1	4960.00	46.65	74.00	-27.35	52.21	34.88	11.14	51.58 --- Peak																																																																																																																								
2	4960.00	21.86	54.00	-32.14	27.42	34.88	11.14	51.58 --- Average																																																																																																																								
3	7440.00	47.99	74.00	-26.01	49.83	36.38	12.97	51.19 --- Peak																																																																																																																								
4	7440.00	23.20	54.00	-30.80	25.04	36.38	12.97	51.19 --- Average																																																																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																																																								
1	4960.00	45.80	74.00	-28.20	51.36	34.88	11.14	51.58 --- Peak																																																																																																																								
2	4960.00	21.01	54.00	-32.99	26.57	34.88	11.14	51.58 --- Average																																																																																																																								
3	7440.00	47.89	74.00	-26.11	49.73	36.38	12.97	51.19 --- Peak																																																																																																																								
4	7440.00	23.10	54.00	-30.90	24.94	36.38	12.97	51.19 --- Average																																																																																																																								


Note: Only the worst case has assessed 18G ~26GHz to test.

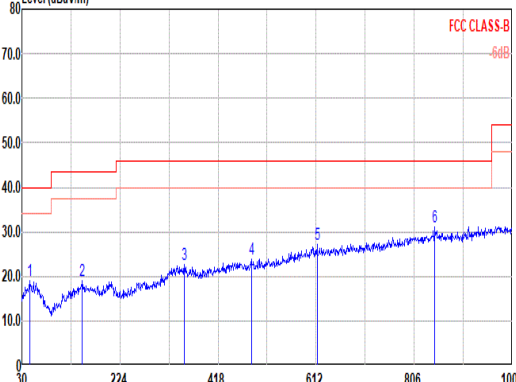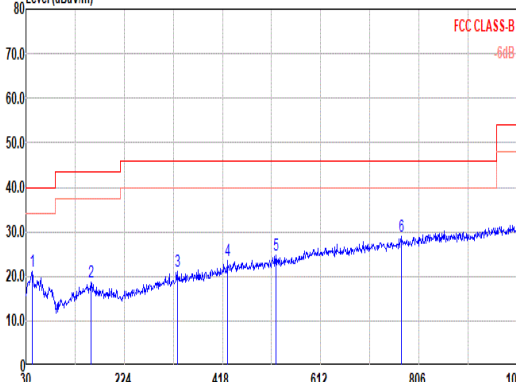


Mode	4																																																																																																																																																																																																																															
	LF																																																																																																																																																																																																																															
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																																																																																															
ANT	6																																																																																																																																																																																																																															
Pol.	Horizontal										Vertical																																																																																																																																																																																																																					
QP/ Peak	Level (dBuV/m) Date: 2023-06-16 FCC CLASS-B -6dB  Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th></th><th>MHz</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>45.52</td><td>19.11</td><td>40.00</td><td>-20.89</td><td>33.10</td><td>16.13</td><td>1.39</td><td>31.51</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>149.31</td><td>19.12</td><td>43.50</td><td>-24.38</td><td>31.75</td><td>16.58</td><td>2.19</td><td>31.40</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>351.07</td><td>22.59</td><td>46.00</td><td>-23.41</td><td>30.46</td><td>20.53</td><td>2.90</td><td>31.30</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>483.96</td><td>23.97</td><td>46.00</td><td>-22.03</td><td>28.37</td><td>23.47</td><td>3.42</td><td>31.29</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>613.94</td><td>27.08</td><td>46.00</td><td>-18.92</td><td>29.87</td><td>24.98</td><td>3.78</td><td>31.55</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>846.74</td><td>31.11</td><td>46.00</td><td>-14.89</td><td>31.64</td><td>26.48</td><td>4.38</td><td>31.39</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>											Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark			MHz	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	45.52	19.11	40.00	-20.89	33.10	16.13	1.39	31.51	---	---	Peak	2	149.31	19.12	43.50	-24.38	31.75	16.58	2.19	31.40	---	---	Peak	3	351.07	22.59	46.00	-23.41	30.46	20.53	2.90	31.30	---	---	Peak	4	483.96	23.97	46.00	-22.03	28.37	23.47	3.42	31.29	---	---	Peak	5	613.94	27.08	46.00	-18.92	29.87	24.98	3.78	31.55	---	---	Peak	6	846.74	31.11	46.00	-14.89	31.64	26.48	4.38	31.39	---	---	Peak	Level (dBuV/m) Date: 2023-06-16 FCC CLASS-B -6dB  Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th></th><th>MHz</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>42.61</td><td>21.07</td><td>40.00</td><td>-18.93</td><td>33.59</td><td>17.58</td><td>1.36</td><td>31.46</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>158.04</td><td>18.62</td><td>43.50</td><td>-24.88</td><td>31.43</td><td>16.34</td><td>2.23</td><td>31.38</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>328.76</td><td>21.00</td><td>46.00</td><td>-25.00</td><td>29.49</td><td>20.03</td><td>2.82</td><td>31.34</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>427.70</td><td>23.52</td><td>46.00</td><td>-22.48</td><td>29.26</td><td>22.51</td><td>3.21</td><td>31.46</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>523.73</td><td>24.66</td><td>46.00</td><td>-21.34</td><td>28.06</td><td>24.31</td><td>3.54</td><td>31.25</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>771.08</td><td>28.84</td><td>46.00</td><td>-17.16</td><td>29.83</td><td>25.98</td><td>4.22</td><td>31.19</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>					Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark			MHz	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	42.61	21.07	40.00	-18.93	33.59	17.58	1.36	31.46	---	---	Peak	2	158.04	18.62	43.50	-24.88	31.43	16.34	2.23	31.38	---	---	Peak	3	328.76	21.00	46.00	-25.00	29.49	20.03	2.82	31.34	---	---	Peak	4	427.70	23.52	46.00	-22.48	29.26	22.51	3.21	31.46	---	---	Peak	5	523.73	24.66	46.00	-21.34	28.06	24.31	3.54	31.25	---	---	Peak	6	771.08	28.84	46.00	-17.16	29.83	25.98	4.22	31.19	---	---	Peak
		Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																																						
		MHz	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																																																							
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																					
	1	45.52	19.11	40.00	-20.89	33.10	16.13	1.39	31.51	---	---	Peak																																																																																																																																																																																																																				
	2	149.31	19.12	43.50	-24.38	31.75	16.58	2.19	31.40	---	---	Peak																																																																																																																																																																																																																				
	3	351.07	22.59	46.00	-23.41	30.46	20.53	2.90	31.30	---	---	Peak																																																																																																																																																																																																																				
	4	483.96	23.97	46.00	-22.03	28.37	23.47	3.42	31.29	---	---	Peak																																																																																																																																																																																																																				
	5	613.94	27.08	46.00	-18.92	29.87	24.98	3.78	31.55	---	---	Peak																																																																																																																																																																																																																				
	6	846.74	31.11	46.00	-14.89	31.64	26.48	4.38	31.39	---	---	Peak																																																																																																																																																																																																																				
	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																																							
	MHz	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																						
1	42.61	21.07	40.00	-18.93	33.59	17.58	1.36	31.46	---	---	Peak																																																																																																																																																																																																																					
2	158.04	18.62	43.50	-24.88	31.43	16.34	2.23	31.38	---	---	Peak																																																																																																																																																																																																																					
3	328.76	21.00	46.00	-25.00	29.49	20.03	2.82	31.34	---	---	Peak																																																																																																																																																																																																																					
4	427.70	23.52	46.00	-22.48	29.26	22.51	3.21	31.46	---	---	Peak																																																																																																																																																																																																																					
5	523.73	24.66	46.00	-21.34	28.06	24.31	3.54	31.25	---	---	Peak																																																																																																																																																																																																																					
6	771.08	28.84	46.00	-17.16	29.83	25.98	4.22	31.19	---	---	Peak																																																																																																																																																																																																																					

Appendix D. Duty Cycle Plots

DH5 on time (One Pulse) Plot on Channel 39

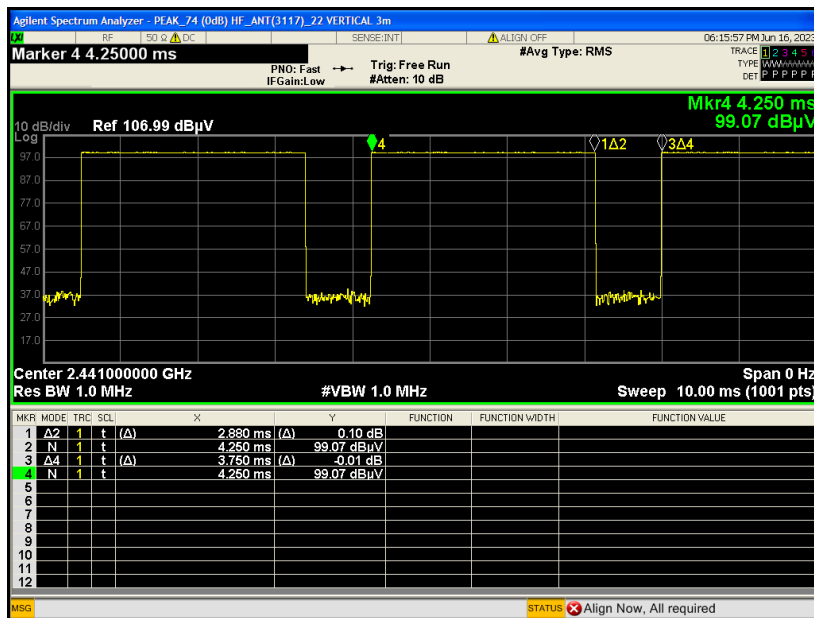

DH5 on time (Count Pulses) Plot on Channel 39

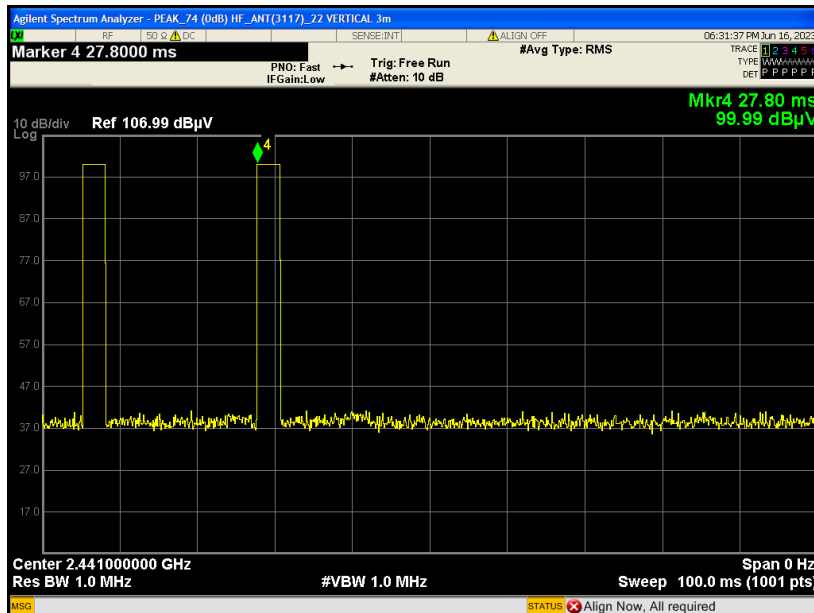

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.