Mode	10	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full_5180MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	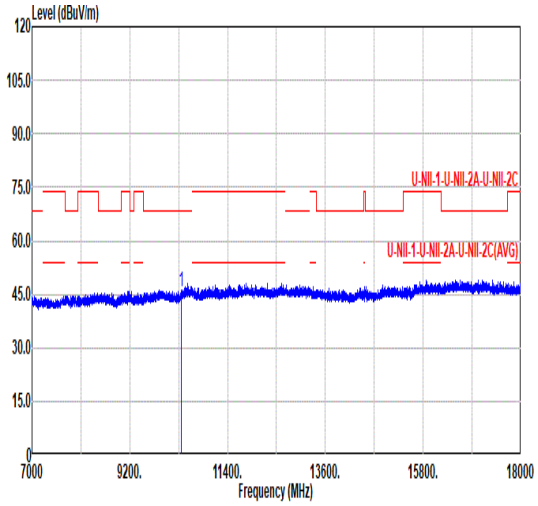 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10360.00 45.52 68.20 -22.68 55.26 37.41 14.13 61.28 0.00 --- --- PEAK	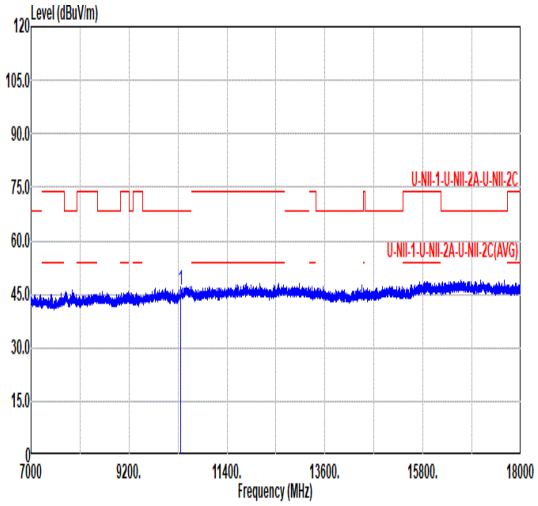 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10360.00 46.06 68.20 -22.14 55.79 37.42 14.13 61.28 0.00 --- --- PEAK

Mode	11	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full_5220MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	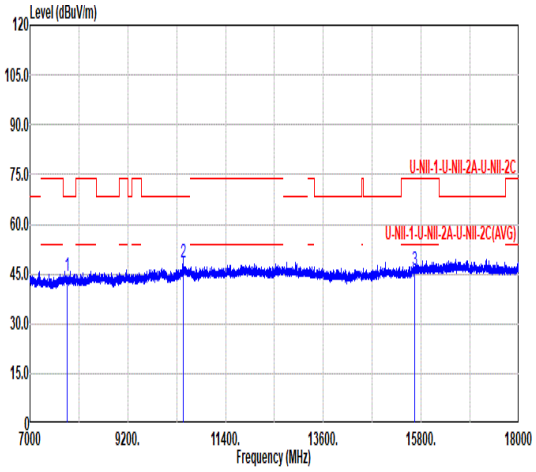 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7830.00 44.56 68.20 -23.64 56.97 35.90 12.19 60.50 0.00 --- --- PEAK 2 10440.00 48.49 68.20 -19.71 58.00 37.58 14.18 61.27 0.00 --- --- PEAK 3 15660.00 46.39 74.00 -27.61 52.29 40.32 17.58 63.80 0.00 --- --- PEAK	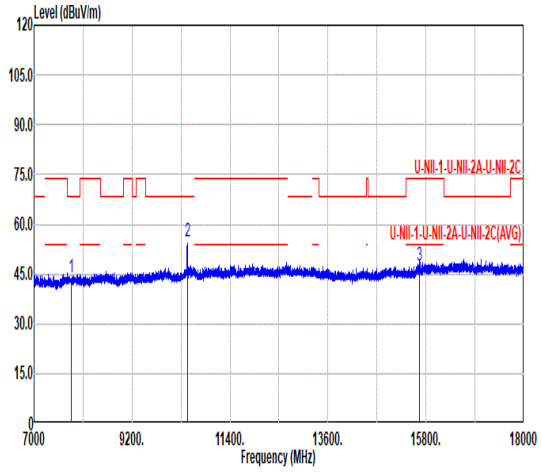 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7830.00 43.94 68.20 -24.26 56.35 35.90 12.19 60.50 0.00 --- --- PEAK 2 10440.00 54.76 68.20 -13.44 64.27 37.58 14.18 61.27 0.00 --- --- PEAK 3 15660.00 47.76 74.00 -26.24 53.66 40.32 17.58 63.80 0.00 --- --- PEAK

Mode	12	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full_5240MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	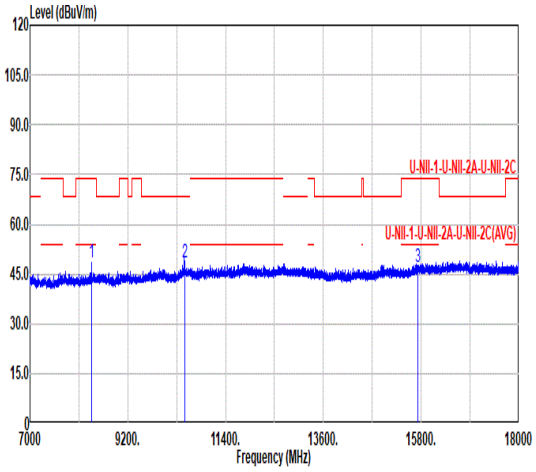 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8383.80 48.42 74.00 -25.58 60.63 35.90 12.66 60.77 0.00 --- --- Peak 2 10480.00 48.54 68.20 -19.66 57.94 37.66 14.21 61.27 0.00 --- --- PEAK 3 15720.00 47.07 74.00 -26.93 52.83 40.44 17.61 63.81 0.00 --- --- PEAK	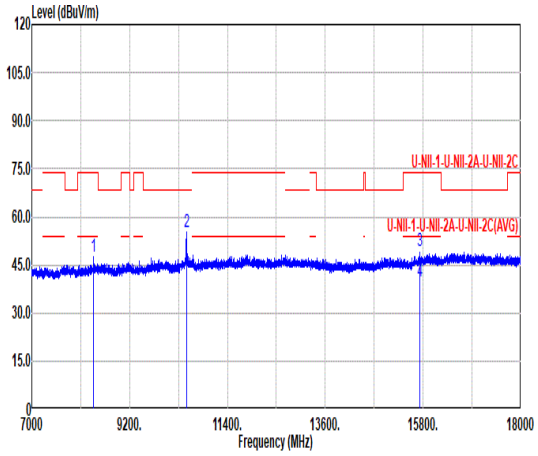 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8383.80 47.52 74.00 -26.48 59.73 35.90 12.66 60.77 0.00 --- --- Peak 2 10480.00 55.03 68.20 -13.17 64.43 37.66 14.21 61.27 0.00 100 330 PEAK 3 15720.00 49.57 74.00 -24.43 55.33 40.44 17.61 63.81 0.00 100 330 PEAK 4 15720.00 40.04 54.00 -13.96 45.81 40.43 17.61 63.81 0.00 100 330 AVERAGE

Mode	13	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_Full_5260MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	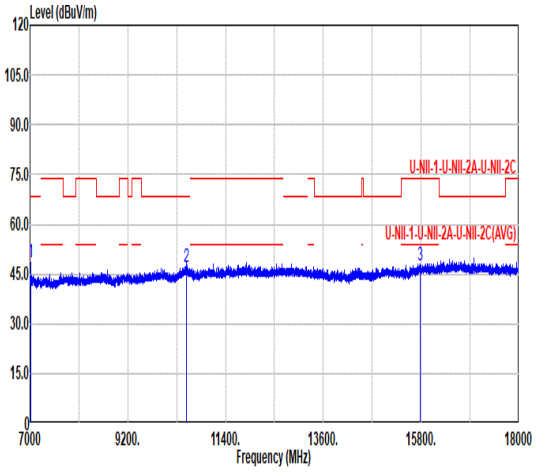 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7013.20 48.36 68.20 -19.84 61.32 35.60 11.50 60.06 0.00 --- --- Peak 2 10520.00 47.16 68.20 -21.04 56.44 37.74 14.24 61.26 0.00 --- --- PEAK 3 15780.00 47.62 74.00 -26.38 53.23 40.56 17.64 63.81 0.00 --- --- PEAK	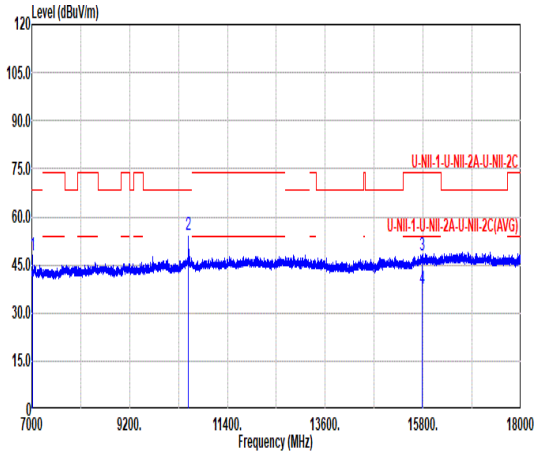 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7013.20 48.16 68.20 -20.04 61.12 35.60 11.50 60.06 0.00 --- --- Peak 2 10520.00 54.54 68.20 -13.66 63.82 37.74 14.24 61.26 0.00 --- --- PEAK 3 15780.00 48.05 74.00 -25.95 53.66 40.56 17.64 63.81 0.00 100 360 PEAK 4 15780.00 37.81 54.00 -16.19 43.42 40.56 17.64 63.81 0.00 100 360 AVERAGE

Mode	14	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_Full_5300MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	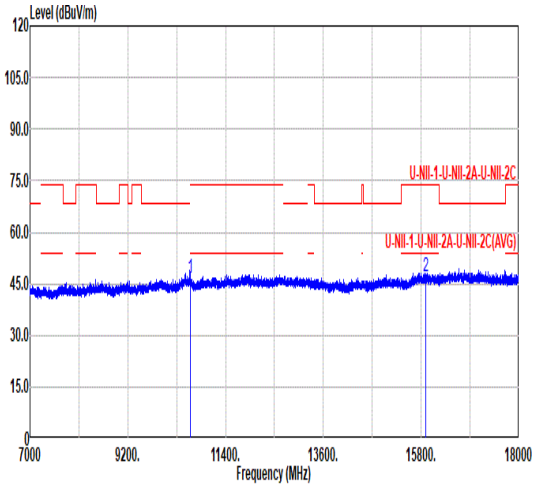 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10600.00 46.86 74.00 -27.14 55.93 37.90 14.29 61.26 0.00 --- --- PEAK 2 15900.00 47.25 74.00 -26.75 52.46 40.90 17.70 63.81 0.00 --- --- PEAK	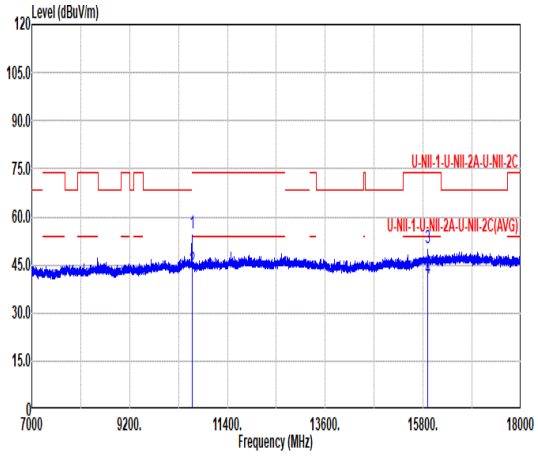 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10600.00 54.75 74.00 -19.25 63.82 37.90 14.29 61.26 0.00 100 331 PEAK 2 10600.00 43.25 54.00 -10.75 52.32 37.90 14.29 61.26 0.00 100 331 AVERAGE 3 15900.00 50.16 74.00 -23.84 55.37 40.90 17.70 63.81 0.00 100 331 PEAK 4 15900.00 40.58 54.00 -13.42 45.80 40.89 17.70 63.81 0.00 100 331 AVERAGE

Mode	15	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full_5320MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	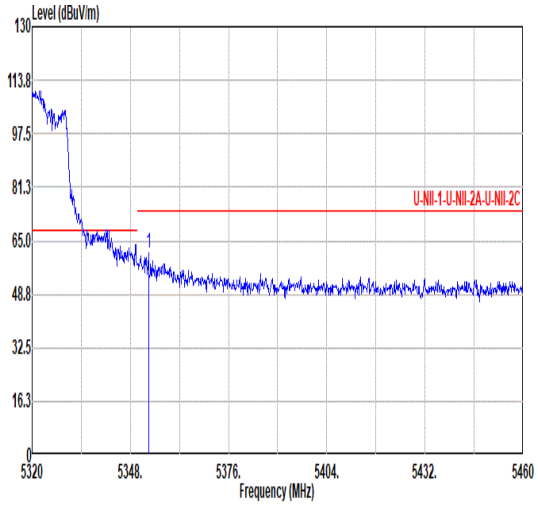 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.18 61.56 74.00 -12.44 48.82 34.61 9.91 31.78 0.00 100 242 PEAK	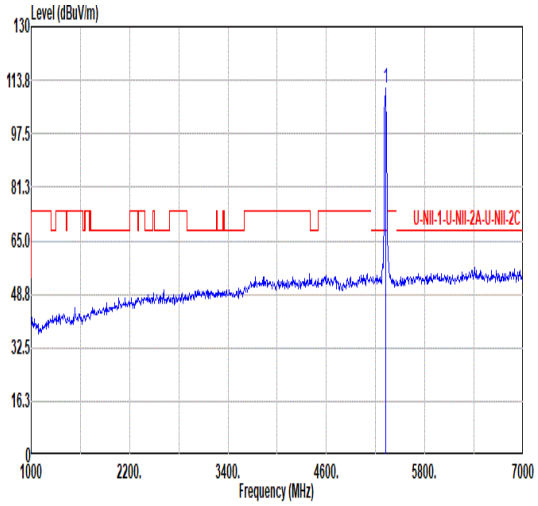 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 111.15 ------ ------ 98.51 34.54 9.90 31.80 0.00 100 242 PEAK
Avg	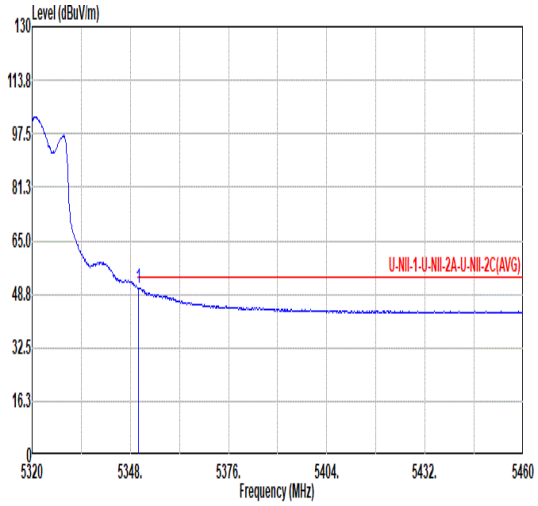 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.24 50.68 54.00 -3.32 37.95 34.60 9.91 31.78 0.00 100 242 AVERAGE	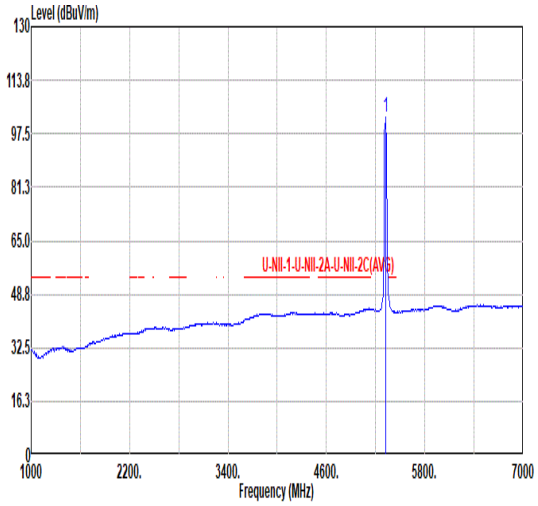 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 102.75 ------ ------ 90.11 34.54 9.90 31.80 0.00 100 242 AVERAGE

Mode	15	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full_5320MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	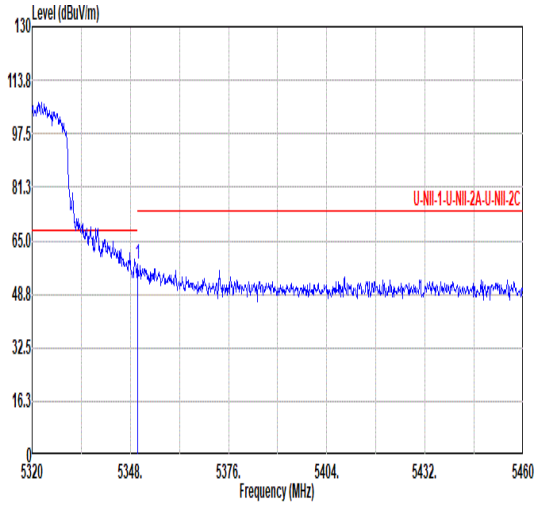 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.10 58.00 74.00 -16.00 45.27 34.60 9.91 31.78 0.00 368 67 PEAK	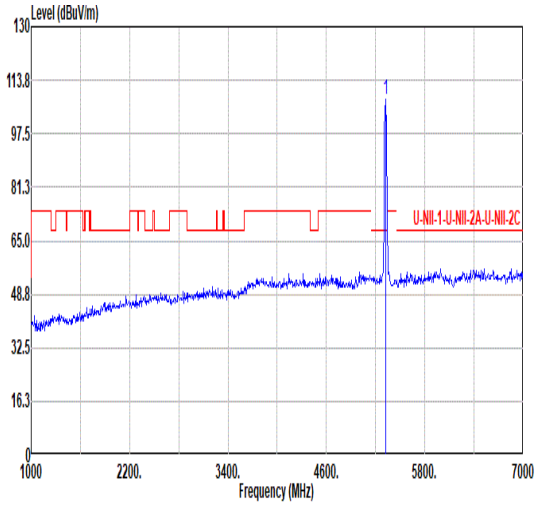 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 107.85 ------ ------ 95.21 34.54 9.90 31.80 0.00 368 67 PEAK
Avg	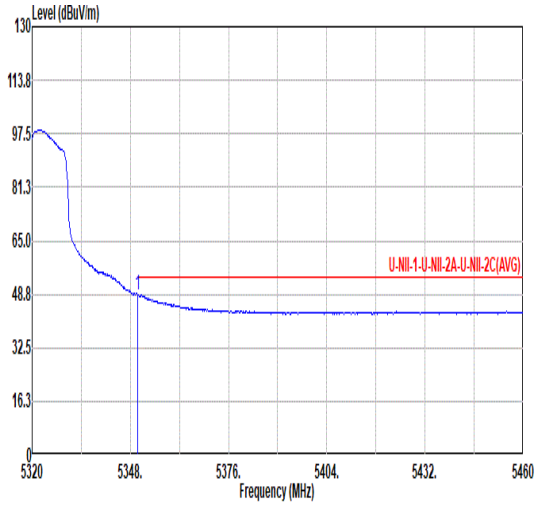 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.10 48.75 54.00 -5.25 36.02 34.60 9.91 31.78 0.00 368 67 AVERAGE	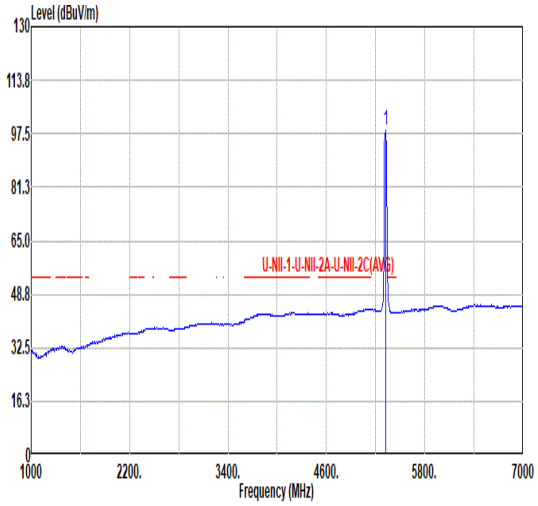 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 98.67 ------ ------ 86.03 34.54 9.90 31.80 0.00 368 67 AVERAGE

Mode	15	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full_5320MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	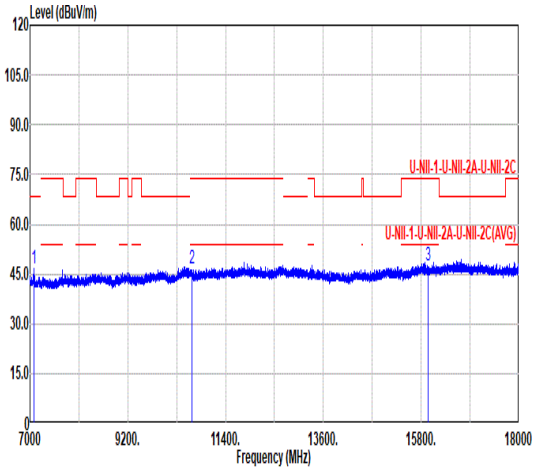 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7093.50 46.80 68.20 -21.40 59.88 35.60 11.56 60.24 0.00 --- --- Peak 2 10640.00 46.79 74.00 -27.21 55.86 37.86 14.32 61.25 0.00 --- --- PEAK 3 15960.00 47.45 74.00 -26.55 52.52 41.02 17.73 63.82 0.00 --- --- PEAK	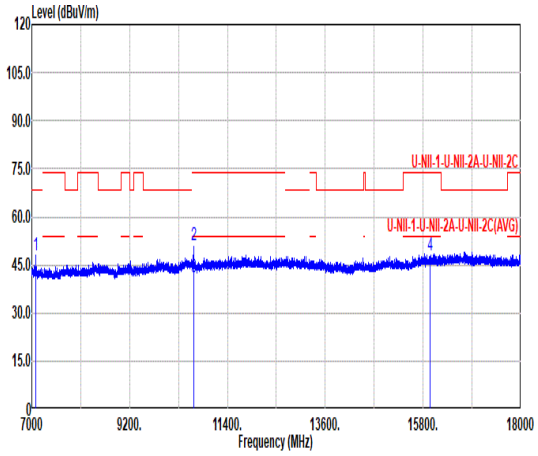 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7093.50 48.16 68.20 -20.04 61.24 35.60 11.56 60.24 0.00 --- --- Peak 2 10640.00 51.34 74.00 -22.66 60.41 37.86 14.32 61.25 0.00 100 0 PEAK 3 10640.00 41.40 54.00 -12.60 50.47 37.86 14.32 61.25 0.00 100 0 AVERAGE 4 15960.00 47.90 74.00 -26.10 52.97 41.02 17.73 63.82 0.00 --- --- PEAK

Mode	16	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_5500MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	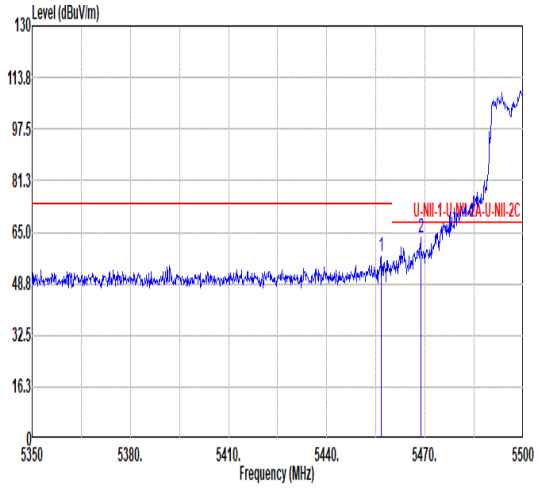 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5456.65 57.57 74.00 -16.43 44.49 34.79 10.02 31.73 0.00 109 238 PEAK 2 5468.65 63.10 68.20 -5.10 50.02 34.76 10.04 31.72 0.00 109 238 PEAK	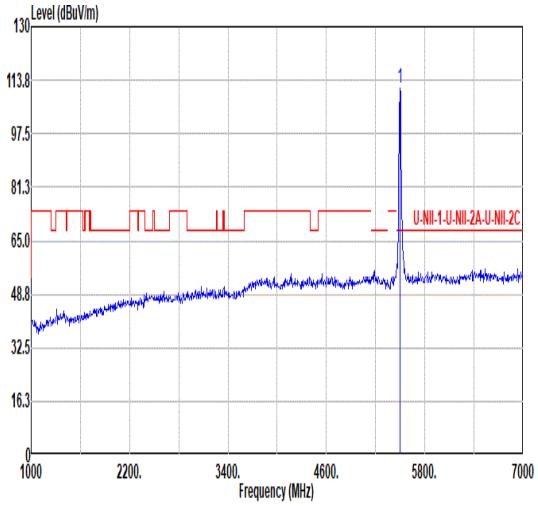 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 111.18 ------ ------ 98.09 34.70 10.09 31.70 0.00 109 238 PEAK
Avg	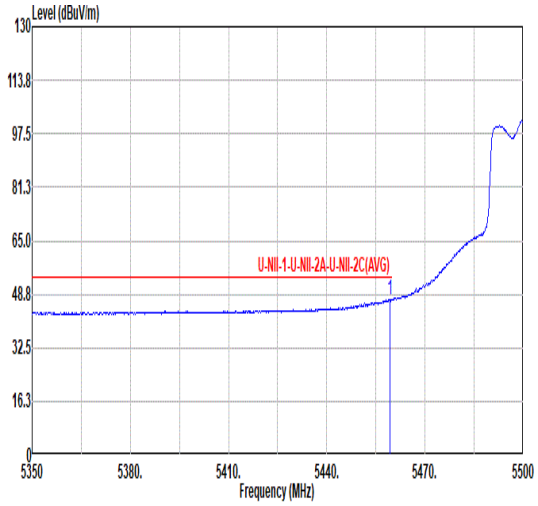 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.20 47.04 54.00 -6.96 33.96 34.78 10.03 31.73 0.00 109 238 AVERAGE	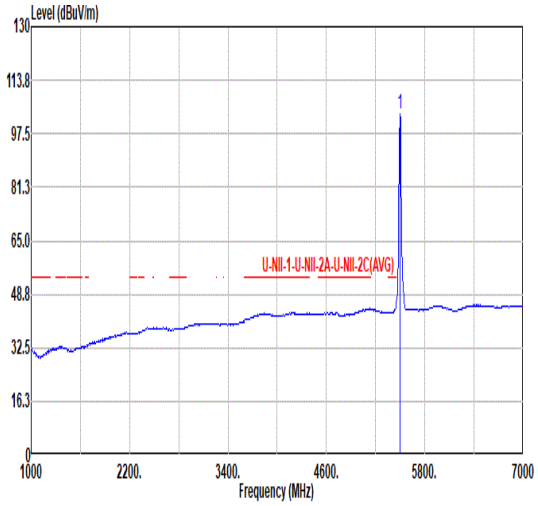 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 103.38 ------ ------ 90.29 34.70 10.09 31.70 0.00 109 238 AVERAGE

Mode	16	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_5500MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	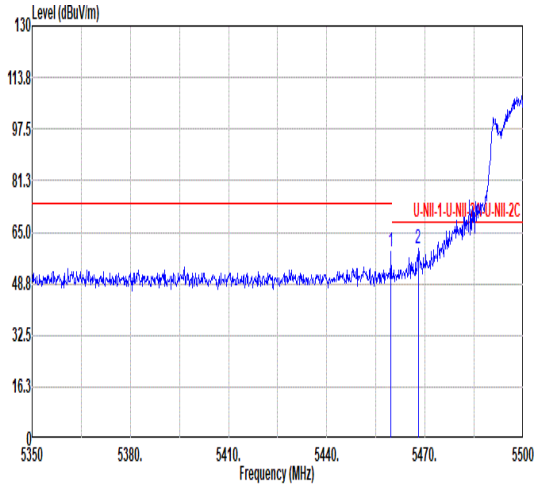 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.65 59.04 74.00 -14.96 45.96 34.78 10.03 31.73 0.00 362 40 PEAK 2 5467.90 59.74 68.20 -8.46 46.66 34.76 10.04 31.72 0.00 362 40 PEAK	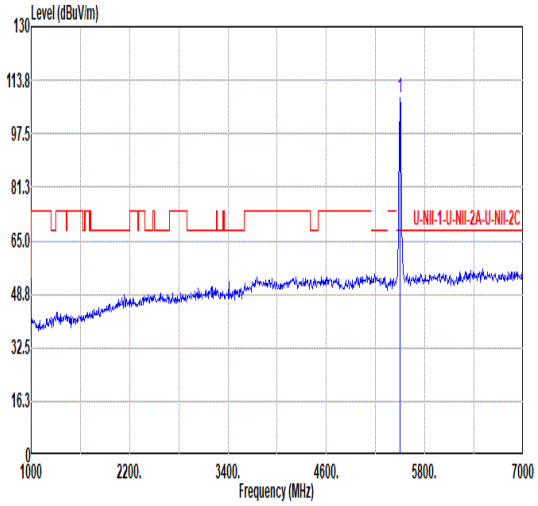 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 108.58 ------ ------ 95.49 34.70 10.09 31.70 0.00 362 40 PEAK
Avg	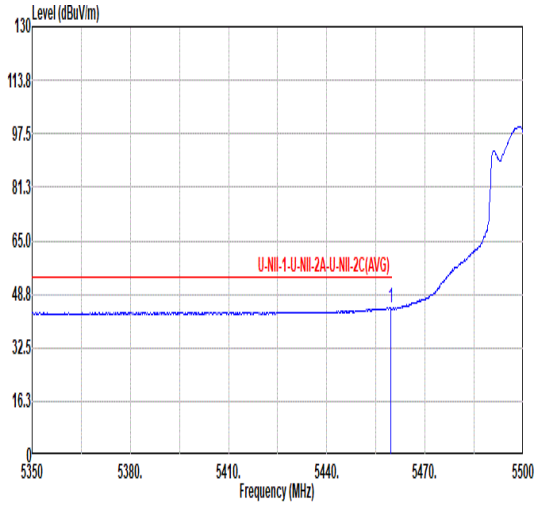 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.65 44.57 54.00 -9.43 31.49 34.78 10.03 31.73 0.00 362 40 AVERAGE	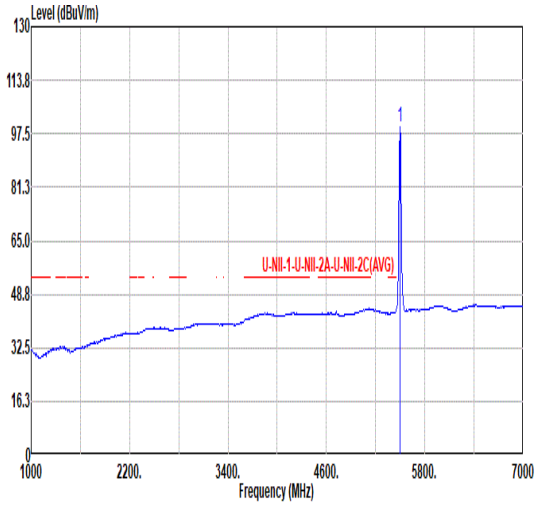 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 99.68 ------ ------ 86.59 34.70 10.09 31.70 0.00 362 40 AVERAGE

Mode	16	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_5500MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	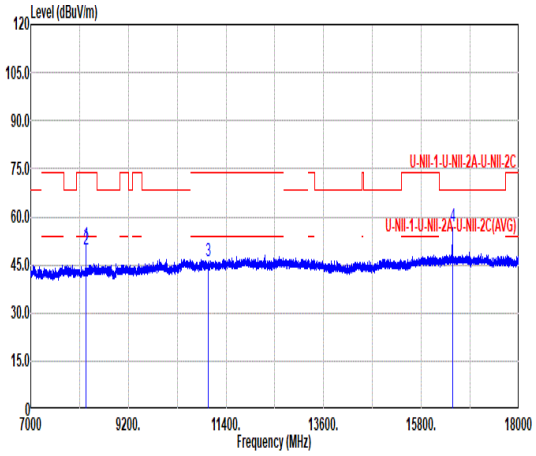 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8250.70 51.08 74.00 -22.92 63.33 35.80 12.51 60.56 0.00 100 274 Peak 2 8250.70 49.75 54.00 -4.25 62.00 35.80 12.51 60.56 0.00 100 274 Average 3 11000.00 46.04 74.00 -27.96 54.70 38.00 14.56 61.22 0.00 --- --- PEAK 4 16500.00 56.98 68.20 -11.22 61.07 41.30 17.98 63.37 0.00 101 253 PEAK	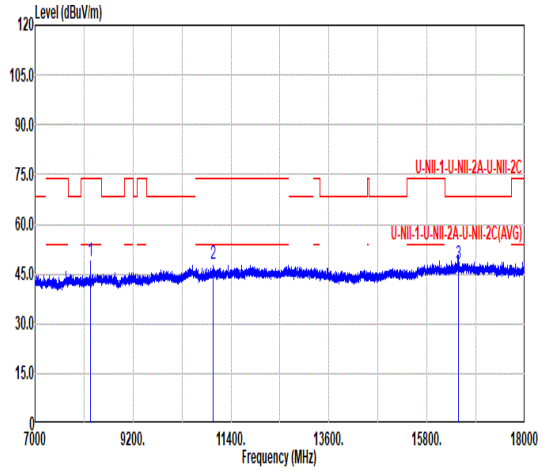 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8250.70 48.80 74.00 -25.20 61.05 35.80 12.51 60.56 0.00 --- --- Peak 2 11000.00 48.16 74.00 -25.84 56.82 38.00 14.56 61.22 0.00 --- --- PEAK 3 16500.00 48.21 68.20 -19.99 52.29 41.30 17.98 63.36 0.00 --- --- PEAK

Mode	17	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_5580MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	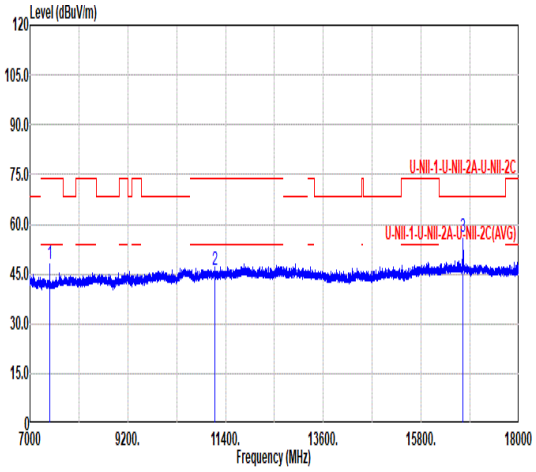 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7440.00 47.86 74.00 -26.14 61.41 35.70 11.77 61.02 0.00 --- --- Peak 2 11160.00 45.98 74.00 -28.02 54.51 38.00 14.68 61.21 0.00 --- --- PEAK 3 16740.00 55.96 68.20 -12.24 59.67 41.34 18.09 63.14 0.00 100 250 PEAK	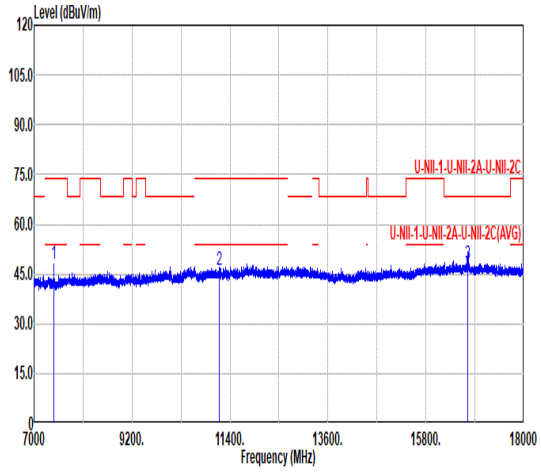 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7440.00 47.82 74.00 -26.18 61.37 35.70 11.77 61.02 0.00 --- --- Peak 2 11160.00 46.15 74.00 -27.85 54.68 38.00 14.68 61.21 0.00 --- --- PEAK 3 16740.00 48.20 68.20 -20.00 51.92 41.34 18.09 63.15 0.00 --- --- PEAK

Mode	18	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_5700MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	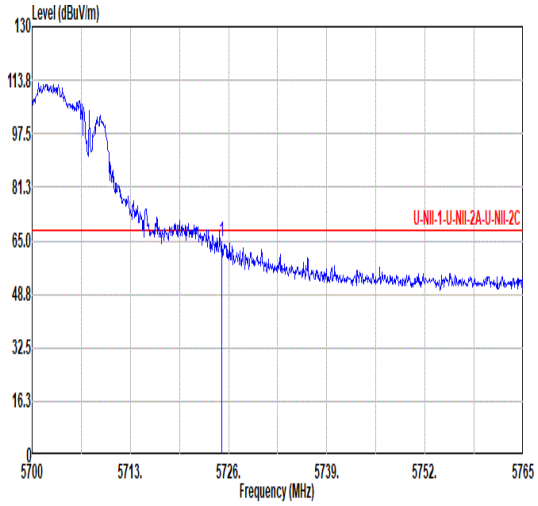 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5725.09 64.68 68.20 -3.52 51.58 34.60 10.34 31.84 0.00 100 240 Peak	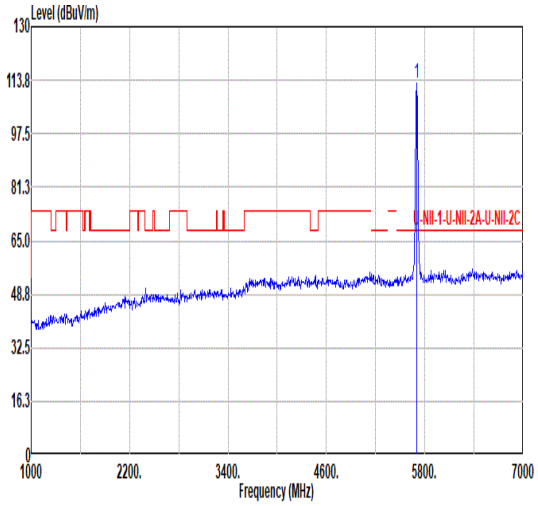 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 112.95 ------ ------ 99.81 34.60 10.33 31.79 0.00 100 240 PEAK
Avg	Blank	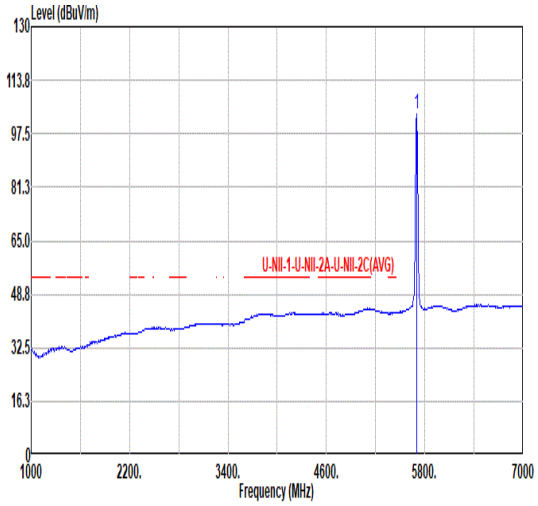 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 103.68 ------ ------ 90.54 34.60 10.33 31.79 0.00 100 240 AVERAGE

Mode	18	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_5700MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	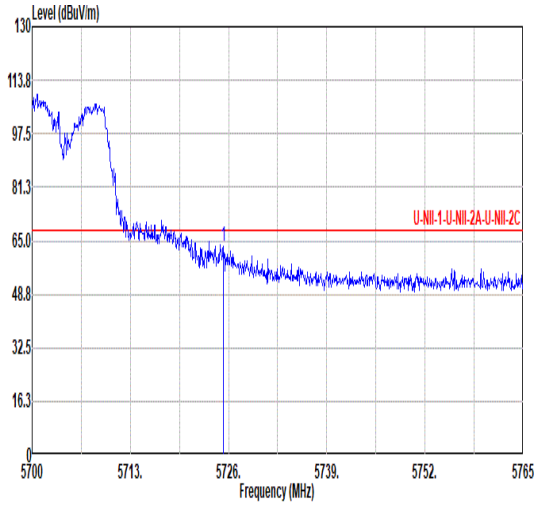 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5725.29 63.19 68.20 -5.01 50.09 34.60 10.34 31.84 0.00 335 30 PEAK	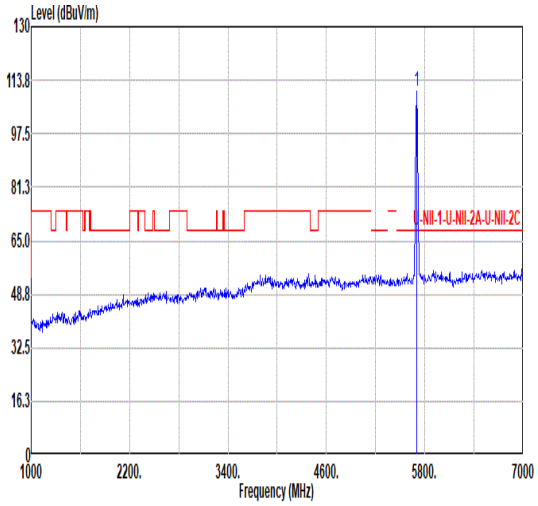 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 110.28 ------ ------ 97.13 34.60 10.32 31.77 0.00 335 30 PEAK
Avg	Blank	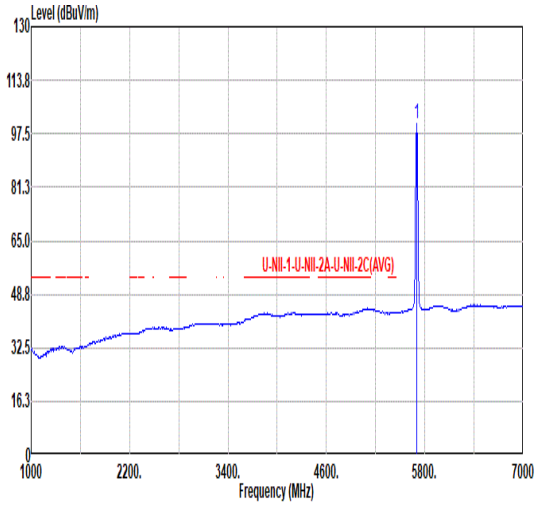 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 100.47 ------ ------ 87.32 34.60 10.32 31.77 0.00 335 30 AVERAGE

Mode	18	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_5700MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	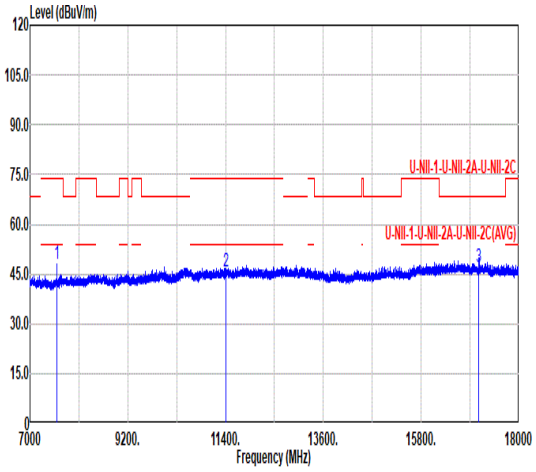 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7599.50 47.98 74.00 -26.02 61.28 35.70 11.95 60.95 0.00 --- --- Peak 2 11400.00 45.72 74.00 -28.28 53.96 38.10 14.85 61.19 0.00 --- --- PEAK 3 17100.00 47.21 68.20 -20.99 50.84 41.02 18.27 62.92 0.00 --- --- PEAK	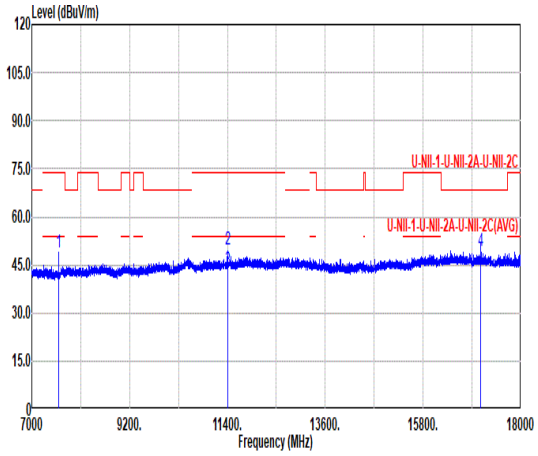 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7599.50 48.71 74.00 -25.29 62.01 35.70 11.95 60.95 0.00 --- --- Peak 2 11400.00 49.76 74.00 -24.24 58.00 38.10 14.85 61.19 0.00 113 13 PEAK 3 11400.00 43.57 54.00 -10.43 51.81 38.10 14.85 61.19 0.00 113 13 AVERAGE 4 17100.00 49.48 68.20 -18.72 53.12 41.01 18.27 62.92 0.00 --- --- PEAK

Mode	19	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU26/0_5180MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	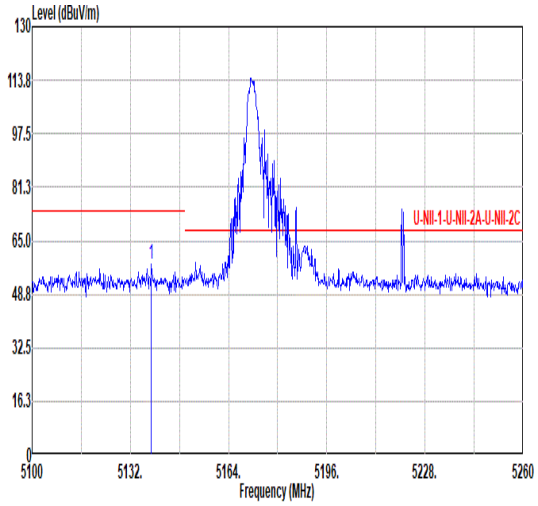 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5138.88 57.96 74.00 -16.04 45.90 34.18 9.78 31.90 0.00 112 262 PEAK	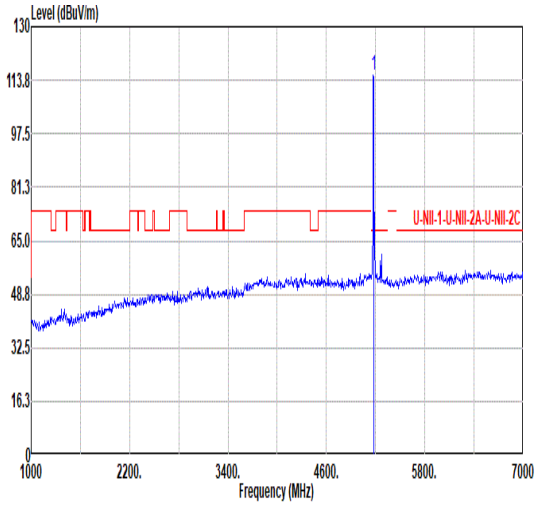 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 115.08 ------ ------ 102.96 34.20 9.80 31.88 0.00 112 262 PEAK
Avg	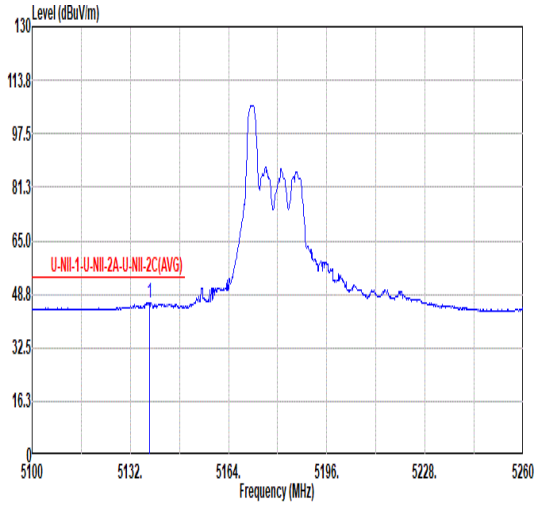 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5138.24 46.20 54.00 -7.80 34.14 34.18 9.78 31.90 0.00 112 262 AVERAGE	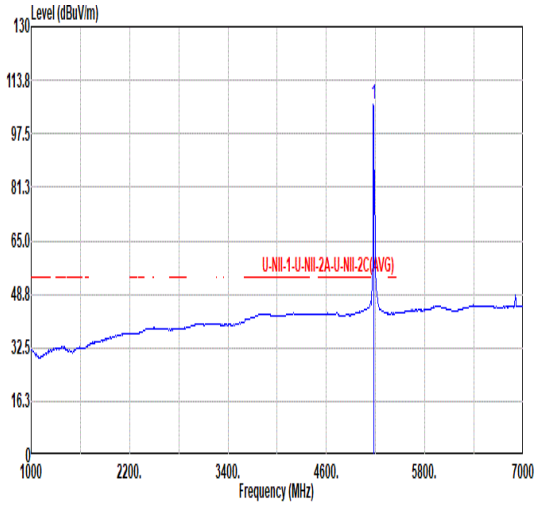 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 106.28 ------ ------ 94.16 34.20 9.80 31.88 0.00 112 262 AVERAGE

Mode	19	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU26/0_5180MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	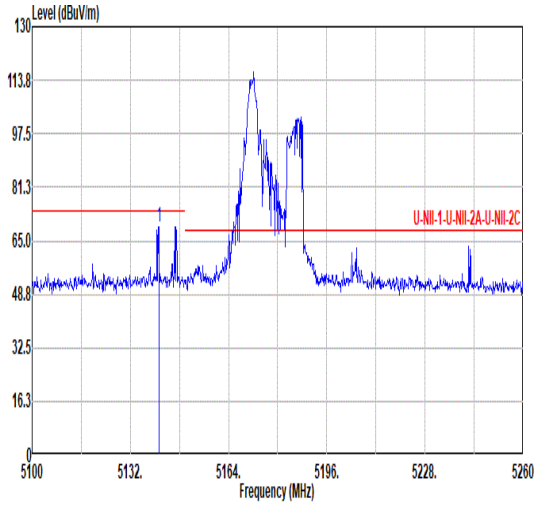 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5141.28 69.36 74.00 -4.64 57.29 34.18 9.78 31.89 0.00 370 60 PEAK	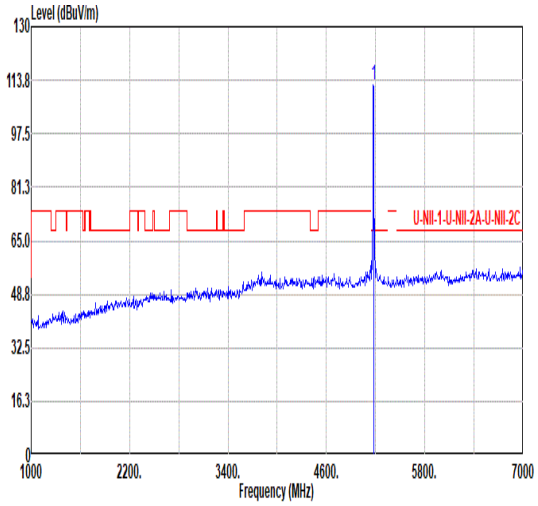 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 112.25 ------ ------ 100.13 34.20 9.80 31.88 0.00 370 60 PEAK
Avg	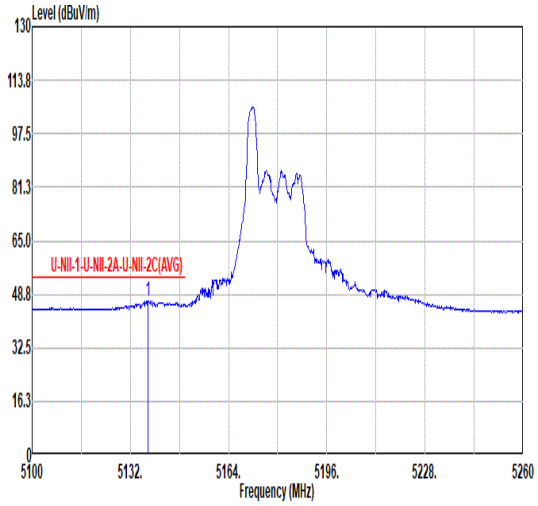 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5137.76 46.76 54.00 -7.24 34.70 34.18 9.78 31.90 0.00 370 60 AVERAGE	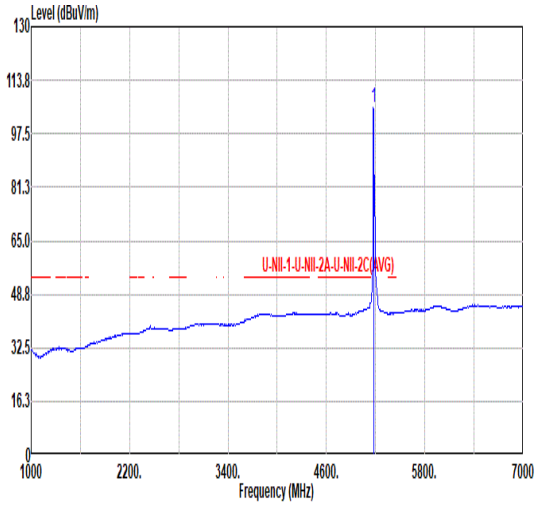 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 105.57 ------ ------ 93.45 34.20 9.80 31.88 0.00 370 60 AVERAGE

Mode	20	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_RU26/8_5320MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	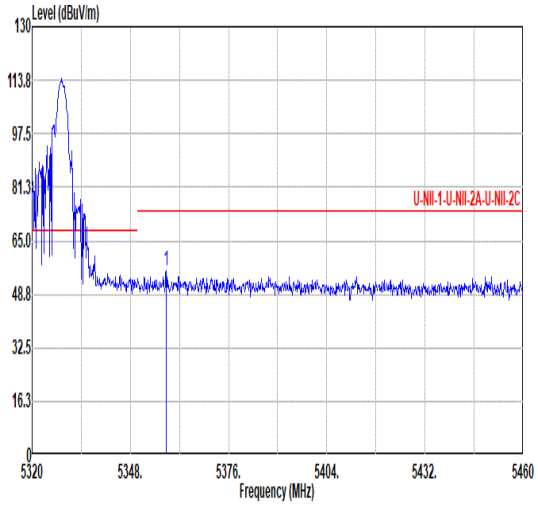 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5358.22 55.86 74.00 -18.14 43.10 34.62 9.92 31.78 0.00 100 305 PEAK	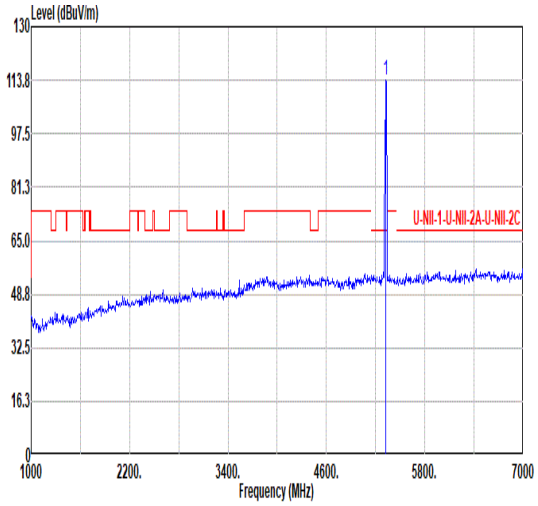 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 113.69 ------ ------ 101.04 34.55 9.90 31.80 0.00 100 305 PEAK
Avg	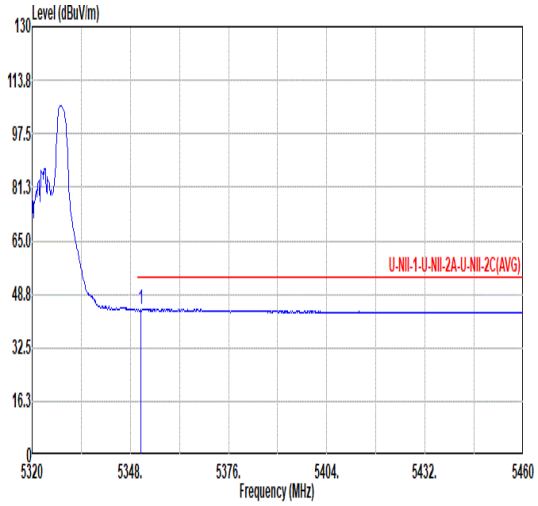 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.94 44.07 54.00 -9.93 31.34 34.60 9.91 31.78 0.00 100 305 AVERAGE	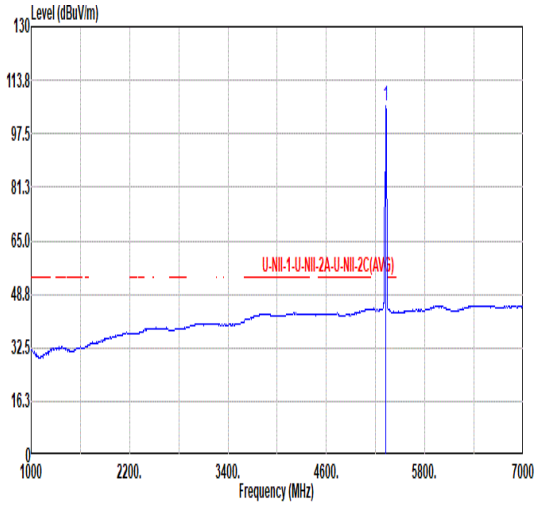 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 106.10 ------ ------ 93.45 34.55 9.90 31.80 0.00 100 305 AVERAGE

Mode	20	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_RU26/8_5320MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	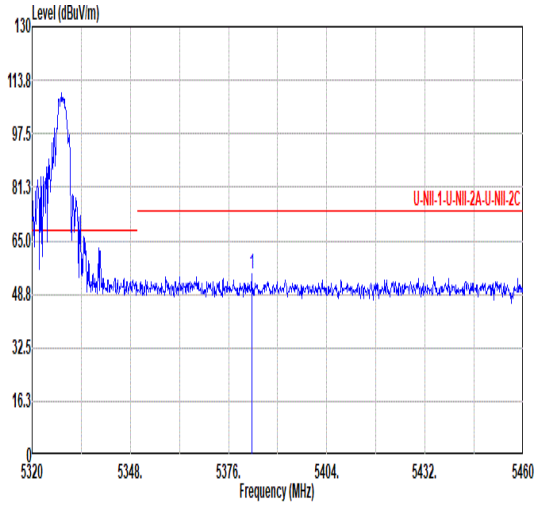 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5382.58 54.75 74.00 -19.25 41.92 34.67 9.93 31.77 0.00 100 18 PEAK	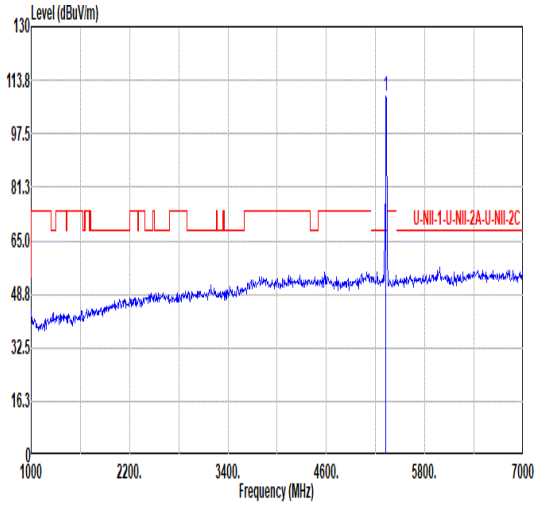 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 109.05 ------ ------ 96.40 34.55 9.90 31.80 0.00 100 18 PEAK
Avg	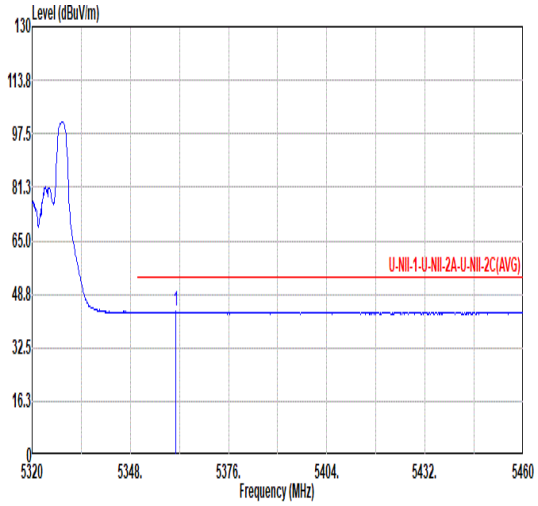 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5360.88 43.50 54.00 -10.50 30.74 34.62 9.92 31.78 0.00 100 18 AVERAGE	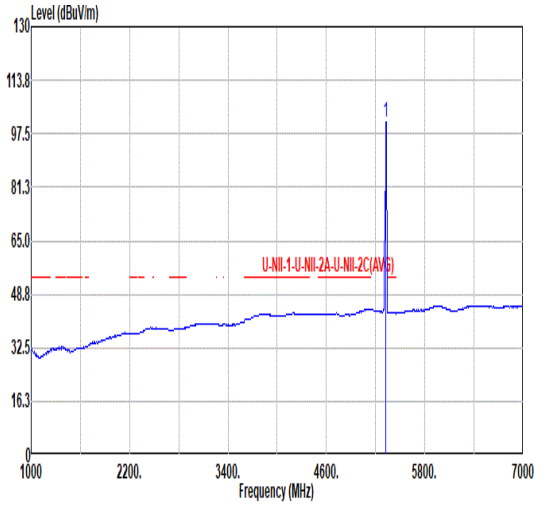 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 101.17 ------ ------ 88.52 34.55 9.90 31.80 0.00 100 18 AVERAGE

Mode	21	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_RU26/0_5500MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	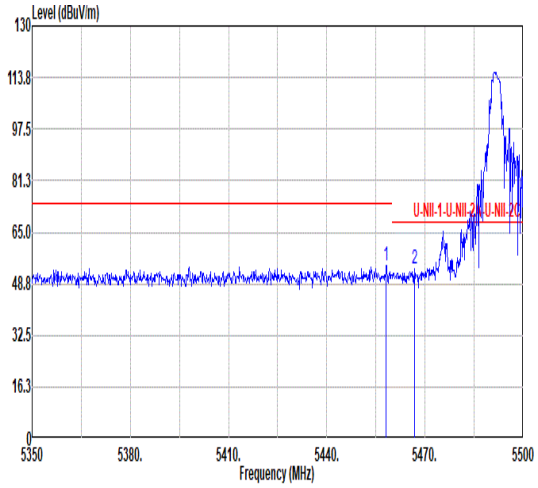 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.15 54.27 74.00 -19.73 41.20 34.78 10.02 31.73 0.00 106 239 PEAK 2 5466.70 53.27 68.20 -14.93 40.18 34.77 10.04 31.72 0.00 106 239 PEAK	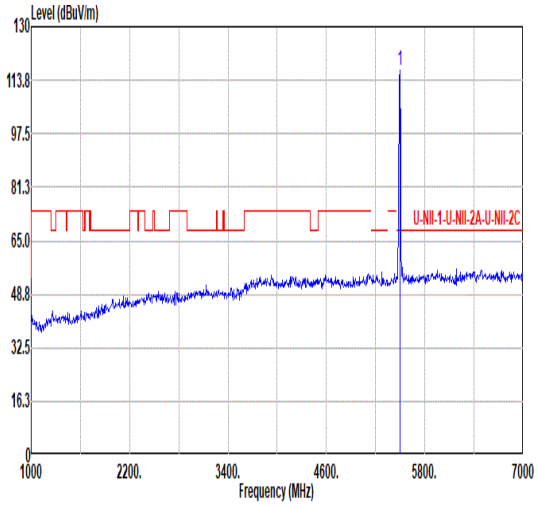 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 116.55 ------ ------ 103.47 34.71 10.08 31.71 0.00 106 239 PEAK
Avg	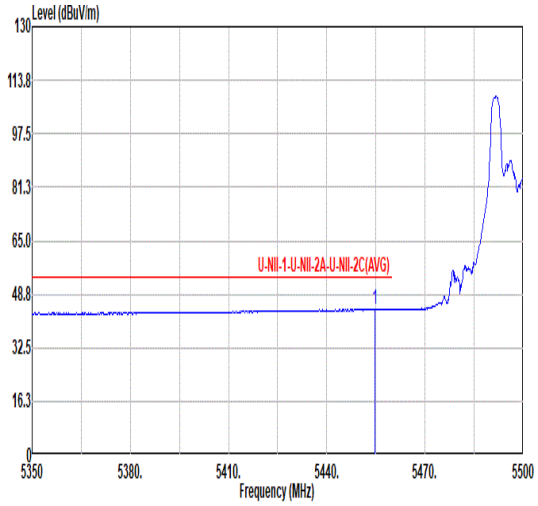 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5454.70 44.33 54.00 -9.67 31.25 34.79 10.02 31.73 0.00 106 239 AVERAGE	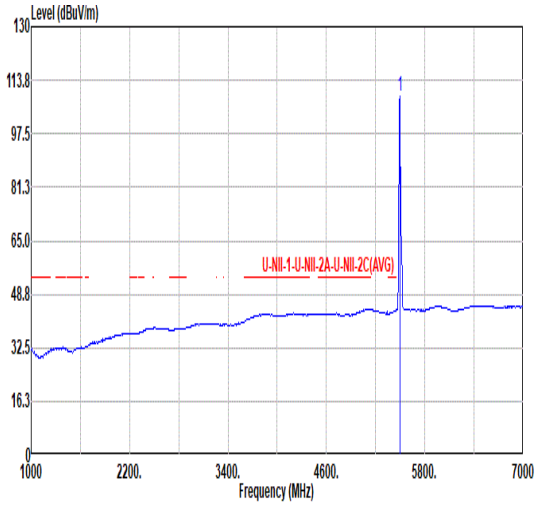 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 108.78 ------ ------ 95.70 34.71 10.08 31.71 0.00 106 239 AVERAGE

Mode	21	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_RU26/0_5500MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	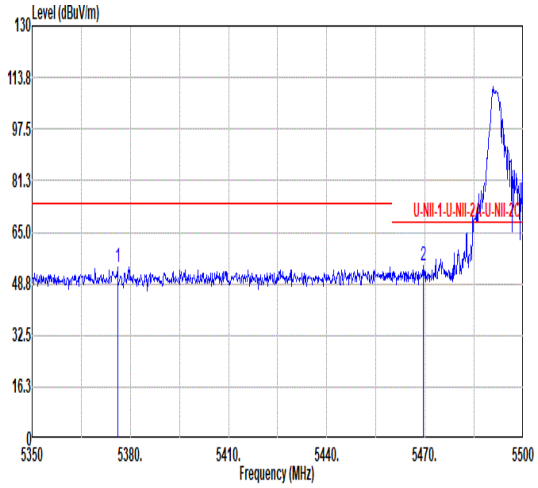 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5376.10 54.03 74.00 -19.97 41.22 34.65 9.93 31.77 0.00 307 47 PEAK 2 5469.40 54.22 68.20 -13.98 41.14 34.76 10.04 31.72 0.00 307 47 PEAK	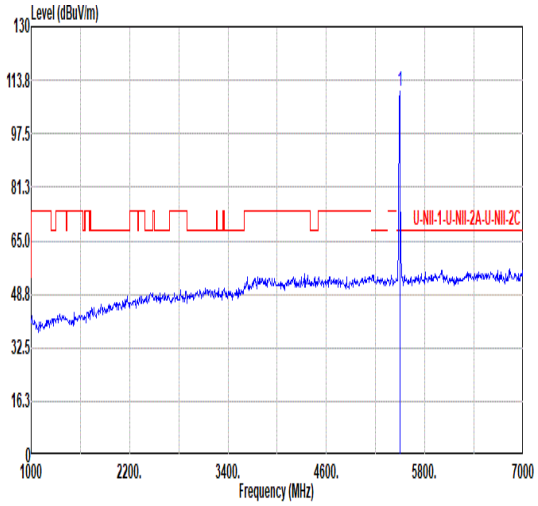 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 110.16 ------ ------ 97.08 34.71 10.08 31.71 0.00 307 47 PEAK
Avg	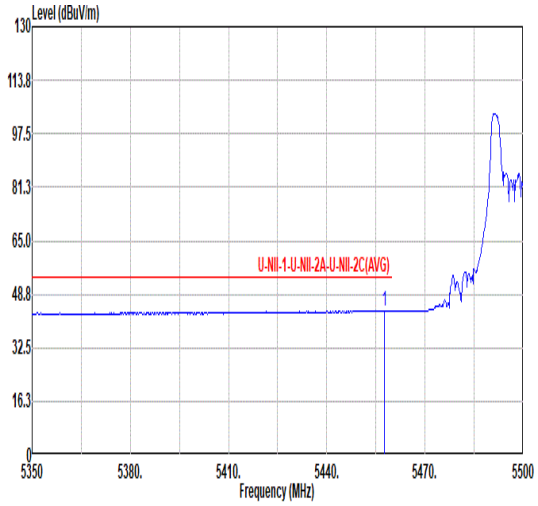 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5457.55 43.88 54.00 -10.12 30.81 34.78 10.02 31.73 0.00 307 47 AVERAGE	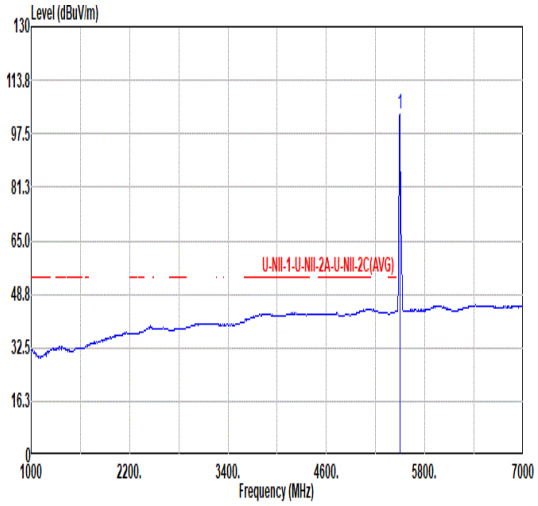 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 103.62 ------ ------ 90.54 34.71 10.08 31.71 0.00 307 47 AVERAGE

Mode	22	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_RU26/8_5700MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	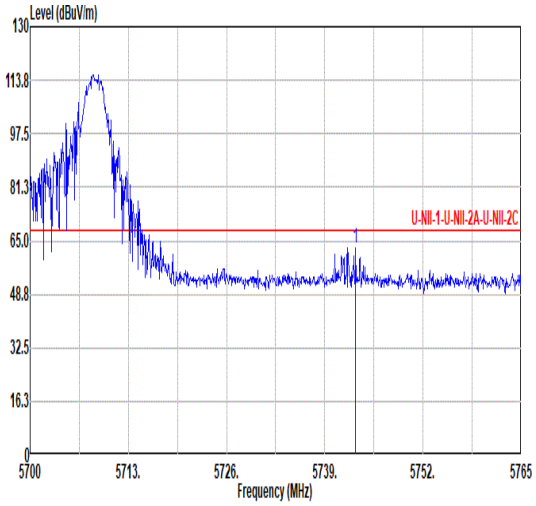 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5743.10 62.64 68.20 -5.56 49.56 34.60 10.36 31.88 0.00 100 312 PEAK	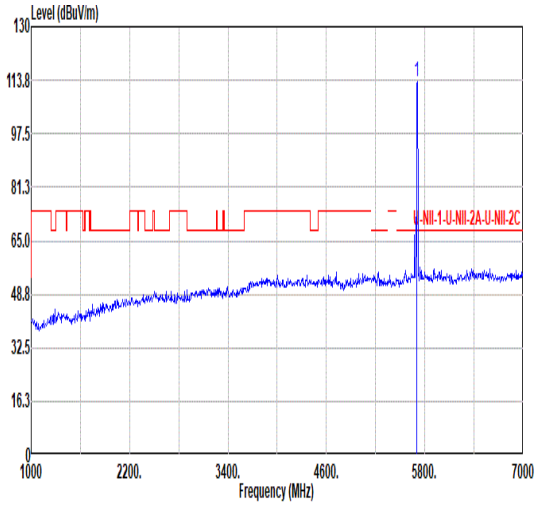 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 113.37 ------ ------ 100.24 34.60 10.33 31.80 0.00 100 312 PEAK
Avg	Blank	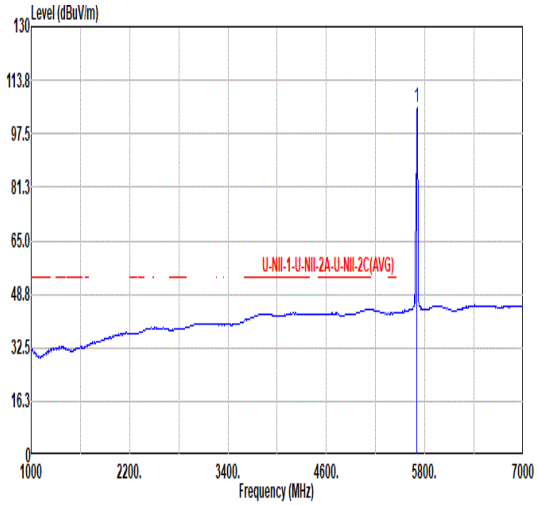 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 105.63 ------ ------ 92.50 34.60 10.33 31.80 0.00 100 312 AVERAGE

Mode	22	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_RU26/8_5700MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	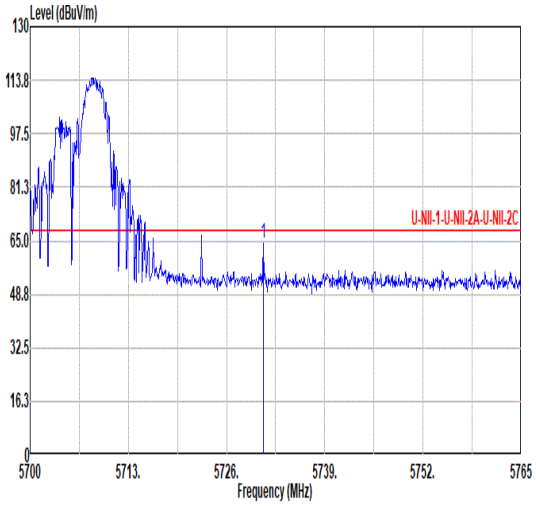 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5730.88 64.30 68.20 -3.90 51.20 34.60 10.35 31.85 0.00 317 50 PEAK	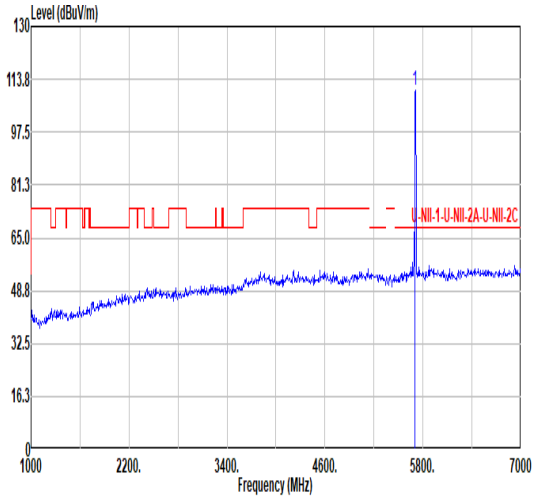 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 110.42 ------ ------ 97.29 34.60 10.33 31.80 0.00 317 50 PEAK
Avg	Blank	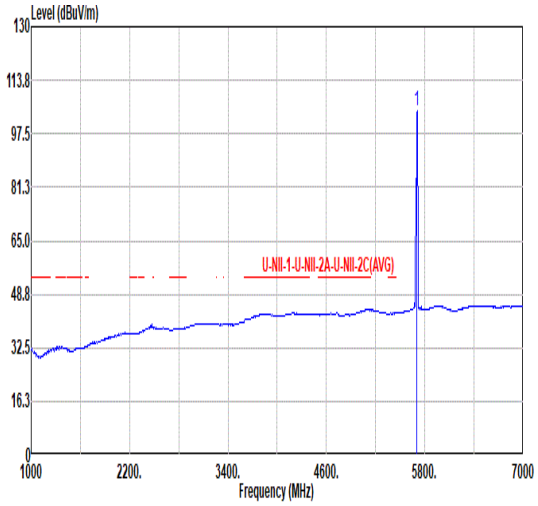 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 104.52 ------ ------ 91.39 34.60 10.33 31.80 0.00 317 50 AVERAGE

Mode	23	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU52/37_5180MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	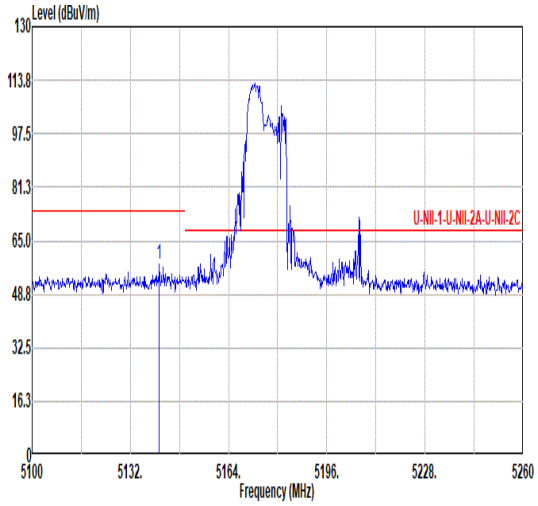 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5141.44 57.67 74.00 -16.33 45.60 34.18 9.78 31.89 0.00 105 114 PEAK	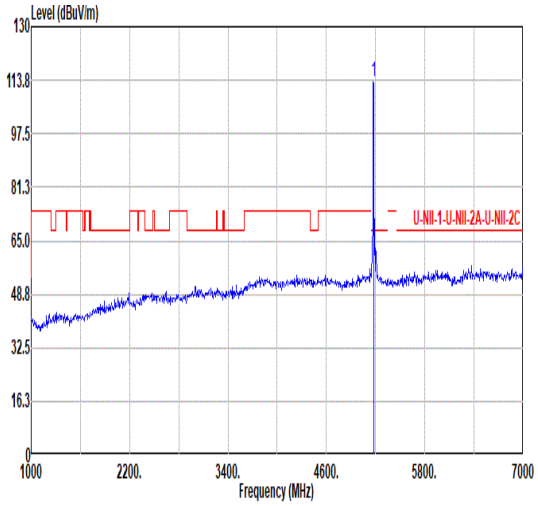 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 113.12 ------ ------ 101.00 34.20 9.80 31.88 0.00 105 114 PEAK
Avg	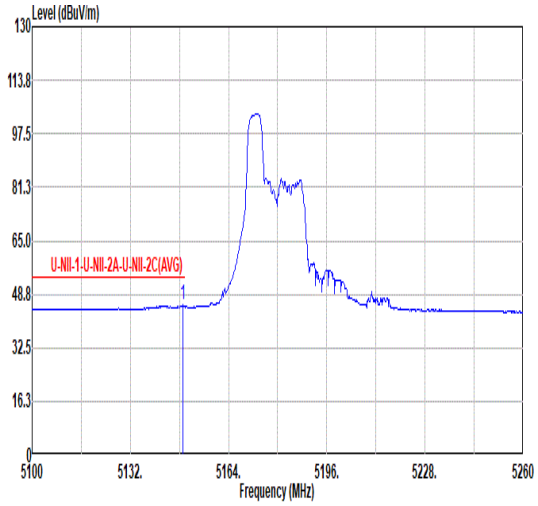 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.12 45.40 54.00 -8.60 33.30 34.20 9.79 31.89 0.00 105 114 AVERAGE	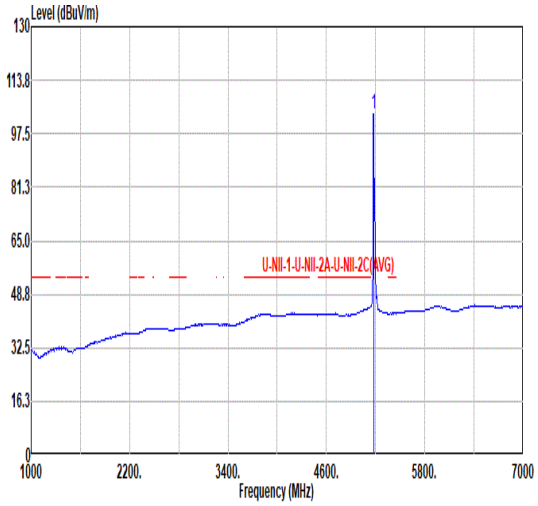 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 103.65 ------ ------ 91.52 34.20 9.81 31.88 0.00 105 114 AVERAGE

Mode	23	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU52/37_5180MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	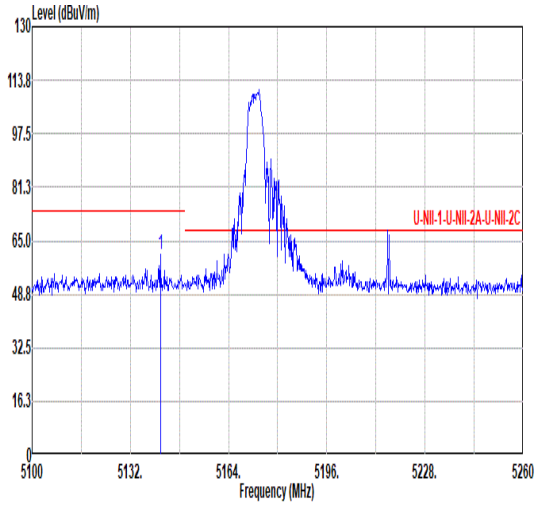 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5141.76 60.99 74.00 -13.01 48.92 34.18 9.78 31.89 0.00 349 57 PEAK	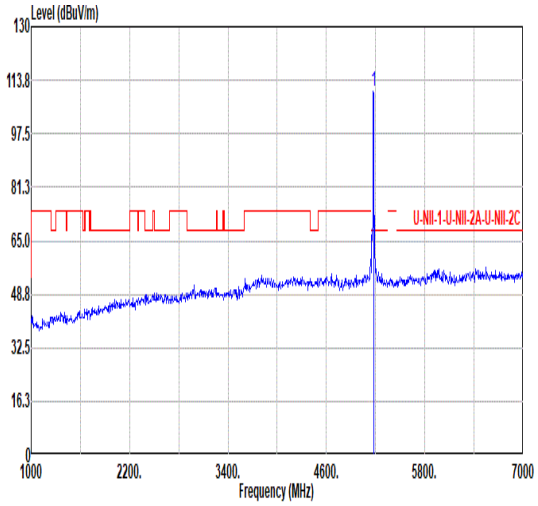 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 110.22 ------ ------ 98.10 34.20 9.80 31.88 0.00 349 57 PEAK
Avg	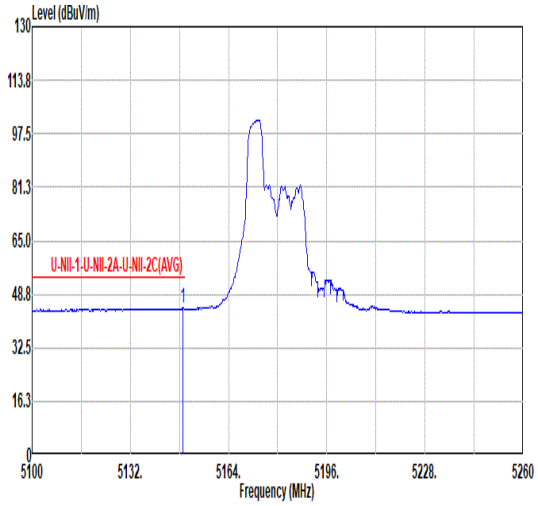 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.12 44.52 54.00 -9.48 32.42 34.20 9.79 31.89 0.00 349 57 AVERAGE	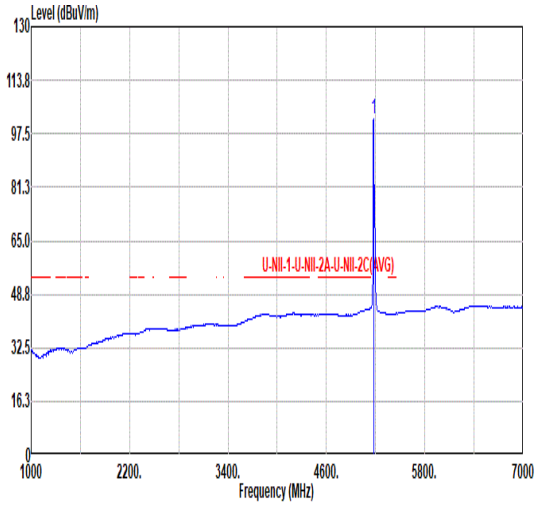 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 101.96 ------ ------ 89.83 34.20 9.81 31.88 0.00 349 57 AVERAGE

Mode	24	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_RU52/40_5320MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	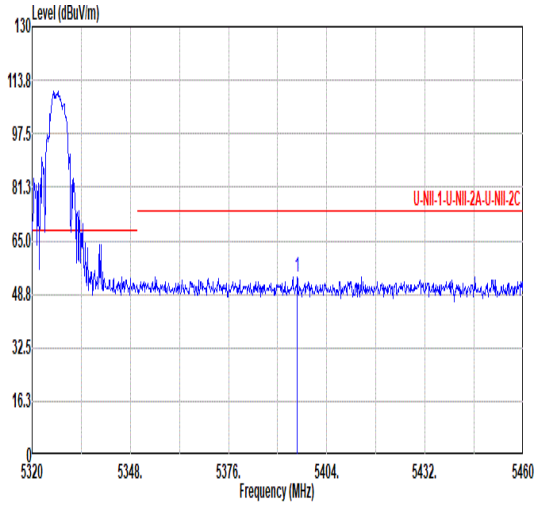 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5395.60 53.94 74.00 -20.06 41.07 34.69 9.94 31.76 0.00 100 308 PEAK	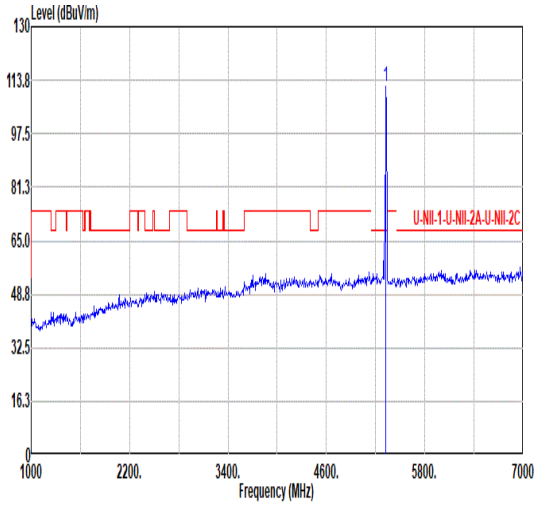 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 111.78 ------ ------ 99.13 34.55 9.90 31.80 0.00 100 308 PEAK
Avg	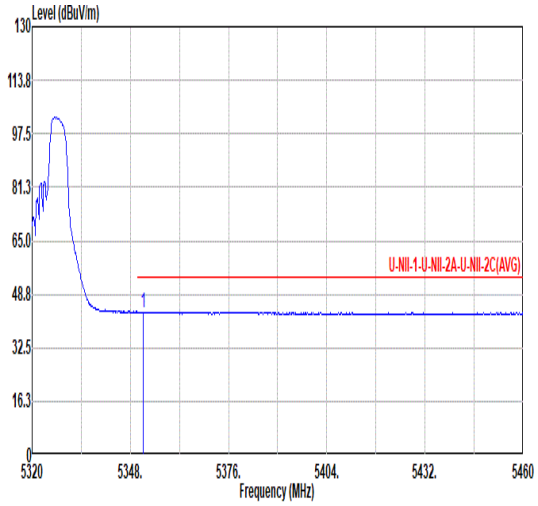 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.64 43.41 54.00 -10.59 30.68 34.60 9.91 31.78 0.00 100 308 AVERAGE	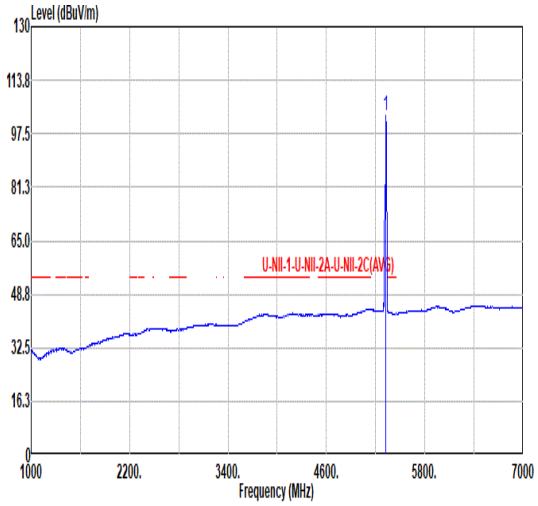 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 102.84 ------ ------ 90.19 34.55 9.90 31.80 0.00 100 308 AVERAGE

Mode	24	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_RU52/40_5320MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	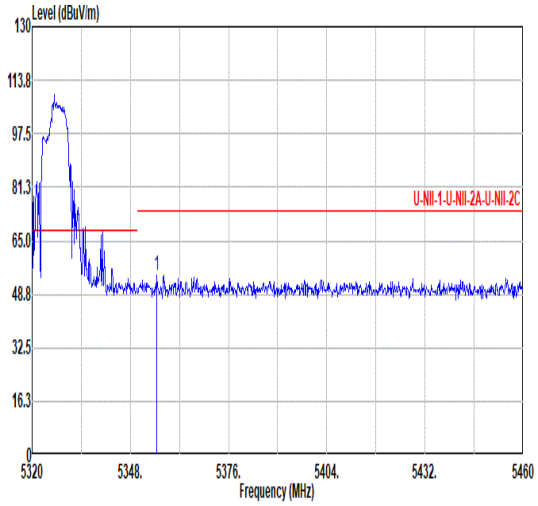 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5355.56 54.40 74.00 -19.60 41.66 34.61 9.91 31.78 0.00 326 66 PEAK	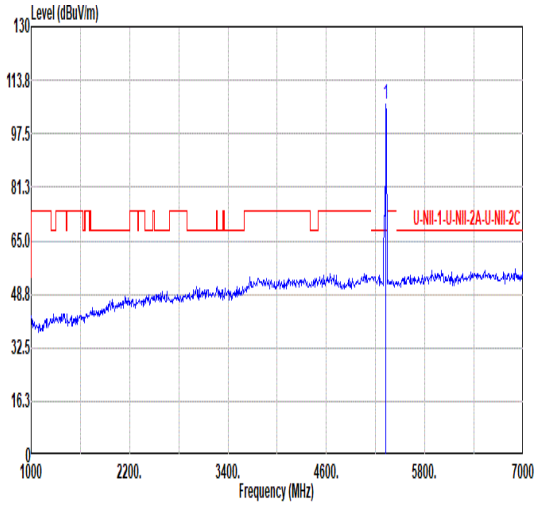 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 106.64 ------ ------ 93.99 34.55 9.90 31.80 0.00 326 66 PEAK
Avg	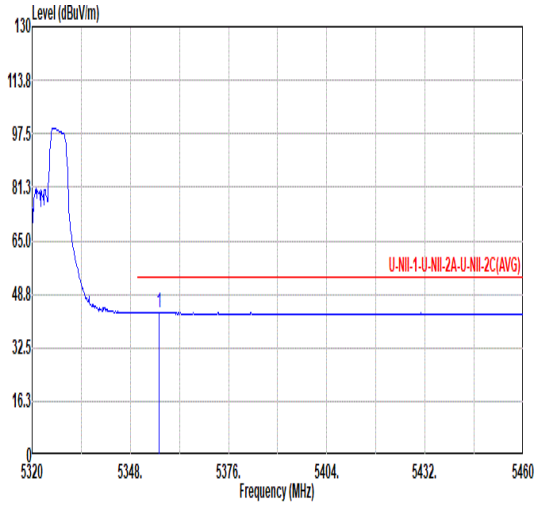 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5356.12 43.31 54.00 -10.69 30.57 34.61 9.91 31.78 0.00 326 66 AVERAGE	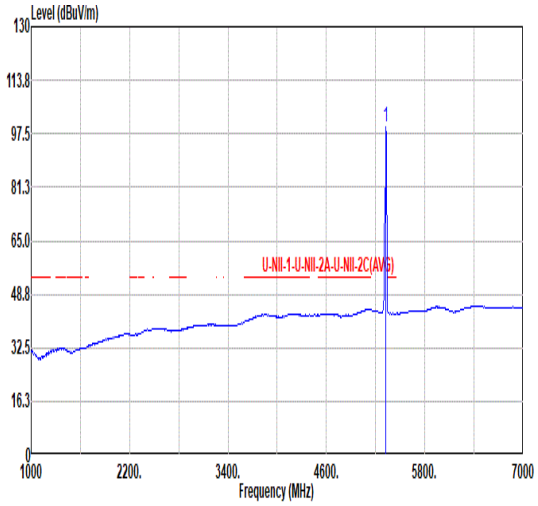 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 99.69 ------ ------ 87.04 34.55 9.90 31.80 0.00 326 66 AVERAGE

Mode	25	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_RU52/37_5500MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	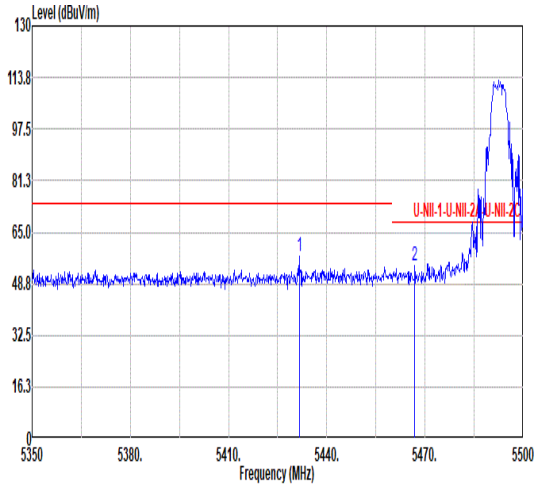 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5431.60 57.35 74.00 -16.65 44.35 34.76 9.98 31.74 0.00 103 244 PEAK 2 5466.85 54.30 68.20 -13.90 41.21 34.77 10.04 31.72 0.00 103 244 PEAK	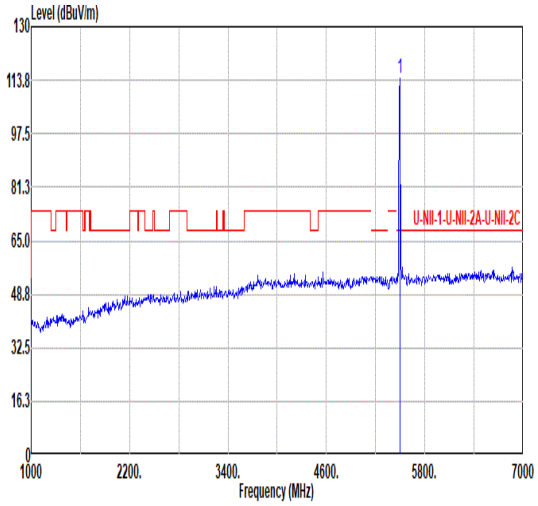 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 114.26 ------ ------ 101.18 34.71 10.08 31.71 0.00 103 244 PEAK
Avg	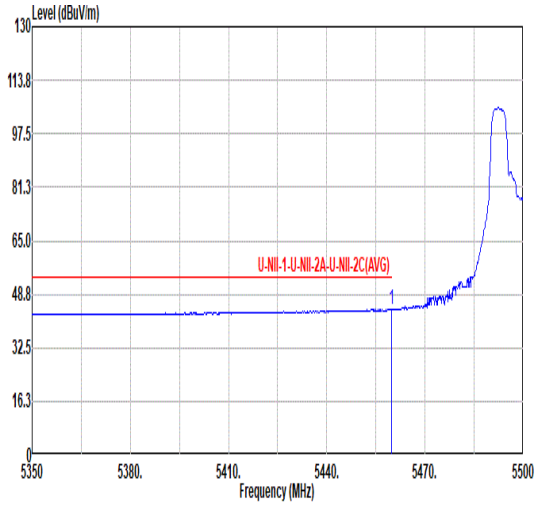 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.80 44.09 54.00 -9.91 31.01 34.78 10.03 31.73 0.00 103 244 AVERAGE	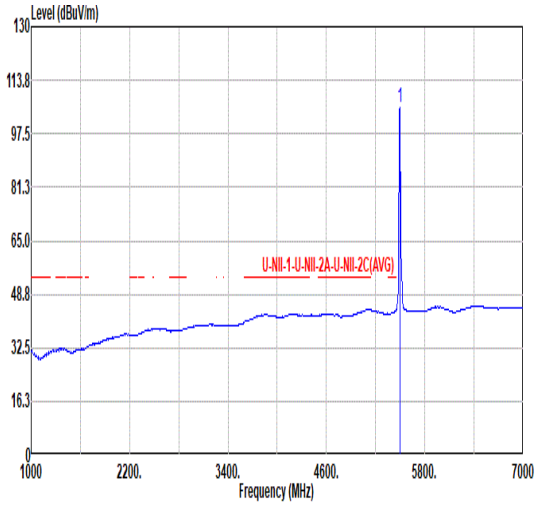 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 105.36 ------ ------ 92.28 34.71 10.08 31.71 0.00 103 244 AVERAGE

Mode	25	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_RU52/37_5500MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	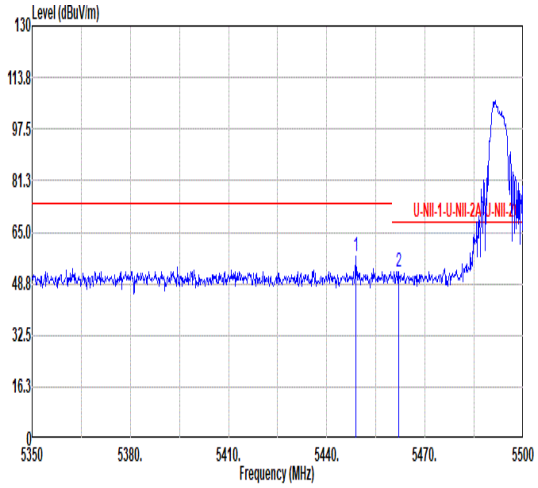 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5448.85 57.48 74.00 -16.52 44.40 34.80 10.01 31.73 0.00 302 46 PEAK 2 5461.90 52.72 68.20 -15.48 39.63 34.78 10.03 31.72 0.00 302 46 PEAK	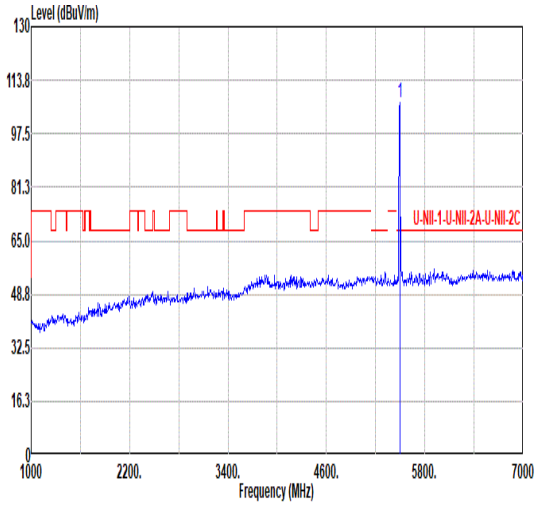 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 107.16 ------ ------ 94.08 34.71 10.08 31.71 0.00 302 46 PEAK
Avg	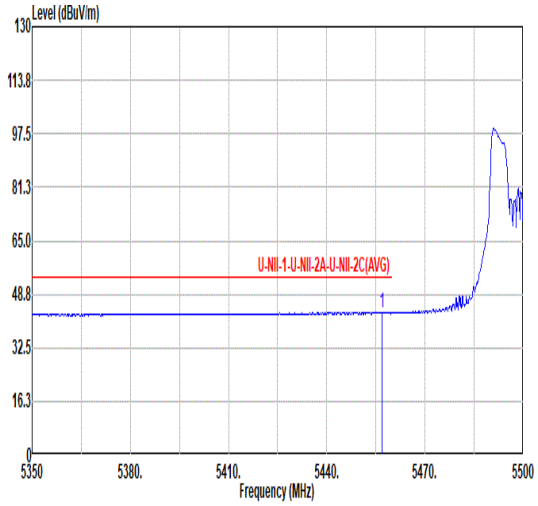 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5456.80 43.17 54.00 -10.83 30.09 34.79 10.02 31.73 0.00 302 46 AVERAGE	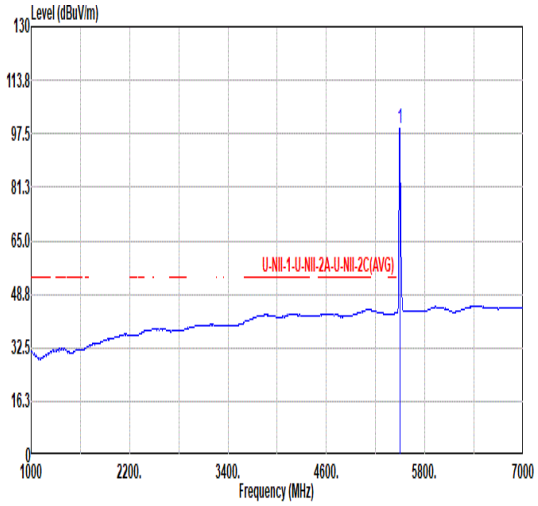 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 99.10 ------ ------ 86.02 34.71 10.08 31.71 0.00 302 46 AVERAGE

Mode	26	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_RU52/40_5700MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	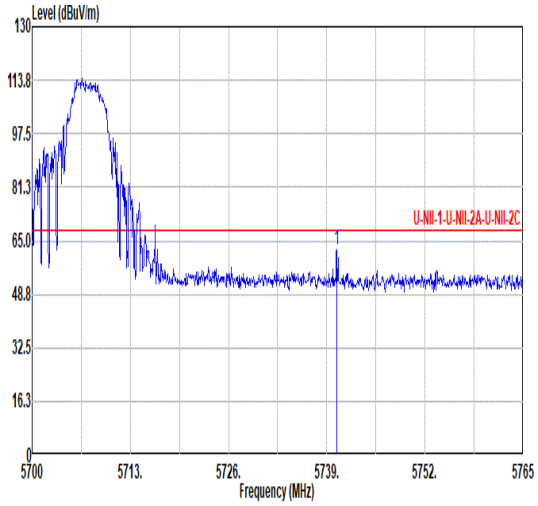 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5740.30 62.12 68.20 -6.08 49.04 34.60 10.36 31.88 0.00 100 303 PEAK	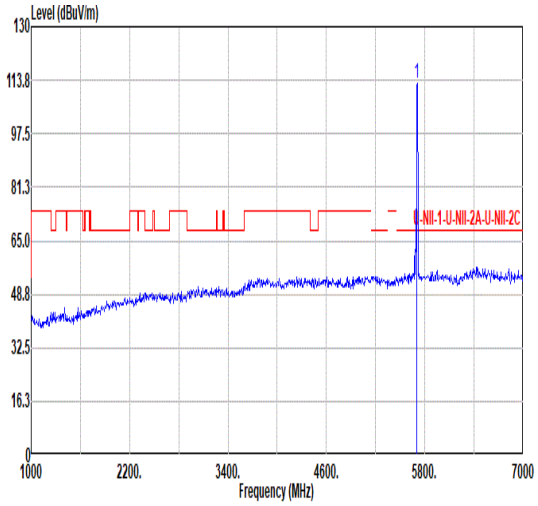 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 112.88 ------ ------ 99.75 34.60 10.33 31.80 0.00 100 303 PEAK
Avg	Blank	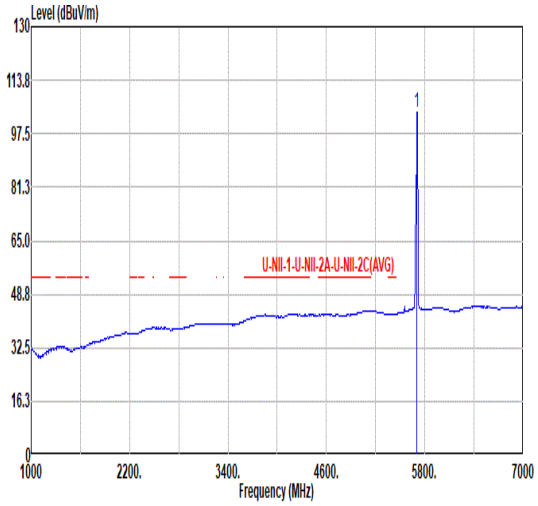 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 104.07 ------ ------ 90.93 34.60 10.33 31.79 0.00 100 303 AVERAGE

Mode	26	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_RU52/40_5700MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	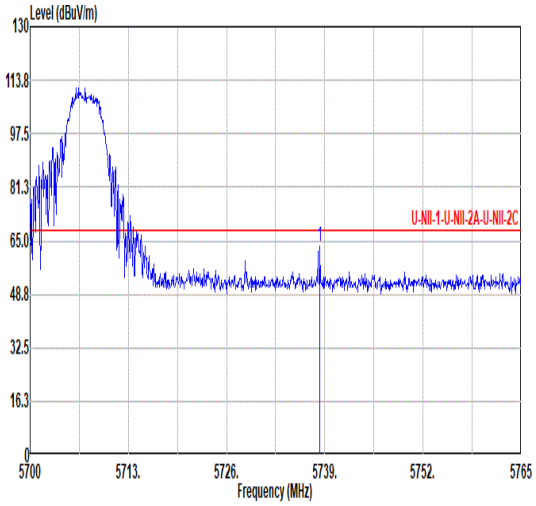 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5738.35 63.30 68.20 -4.90 50.21 34.60 10.36 31.87 0.00 317 51 PEAK	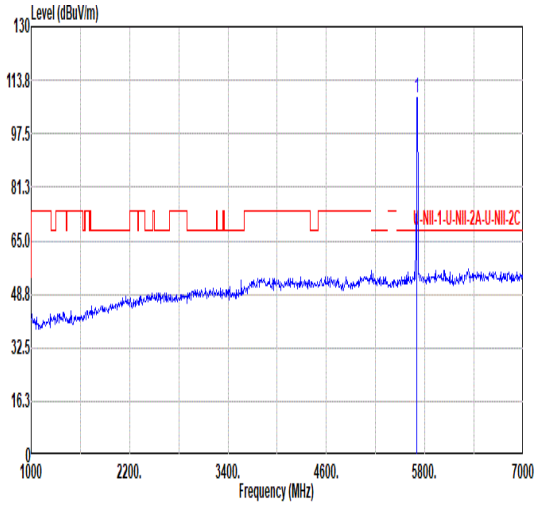 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 108.36 ------ ------ 95.22 34.60 10.33 31.79 0.00 317 51 PEAK
Avg	Blank	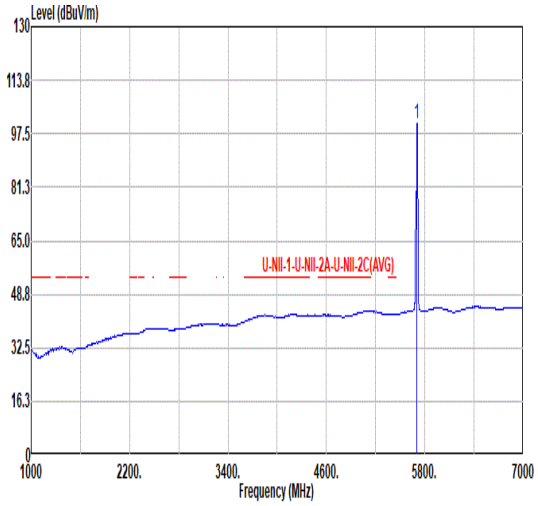 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 100.47 ------ ------ 87.33 34.60 10.33 31.79 0.00 317 51 AVERAGE

Mode	27	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU106/53_5180MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	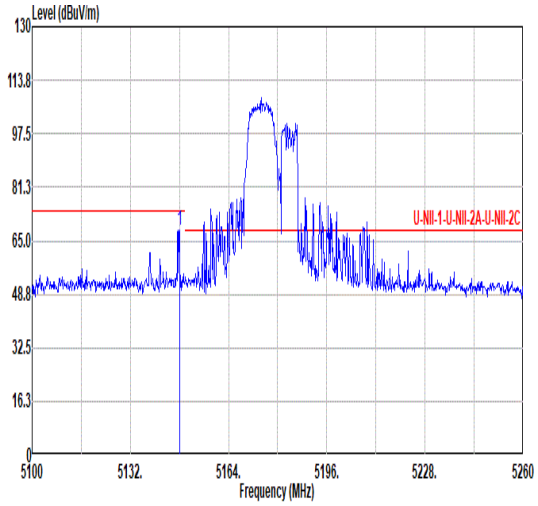 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.00 68.19 74.00 -5.81 56.10 34.20 9.78 31.89 0.00 106 217 PEAK	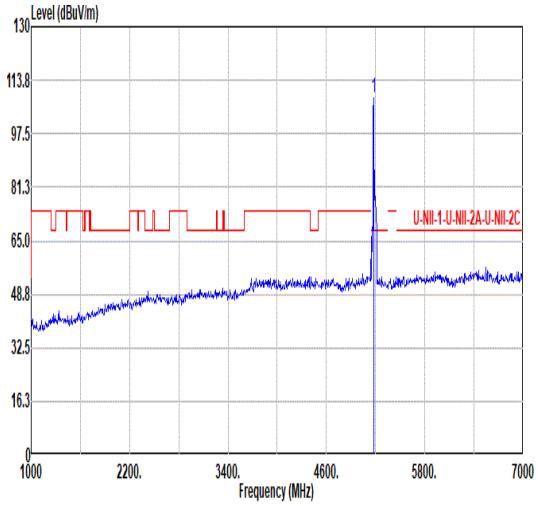 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 108.21 ------ ------ 96.08 34.20 9.81 31.88 0.00 106 217 PEAK
Avg	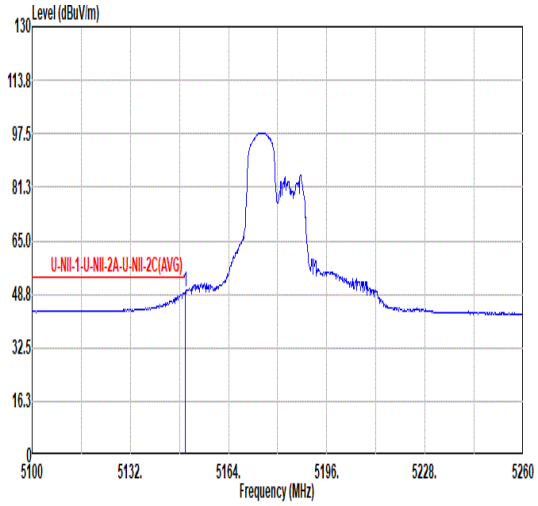 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.92 49.53 54.00 -4.47 37.43 34.20 9.79 31.89 0.00 106 217 AVERAGE	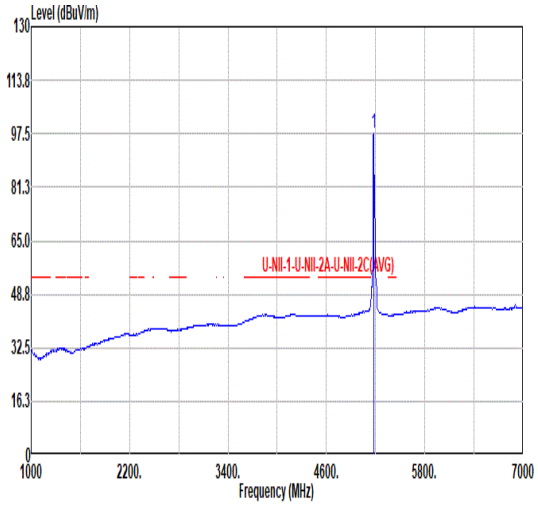 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 97.77 ------ ------ 85.64 34.20 9.81 31.88 0.00 106 217 AVERAGE

Mode	27	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU106/53_5180MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	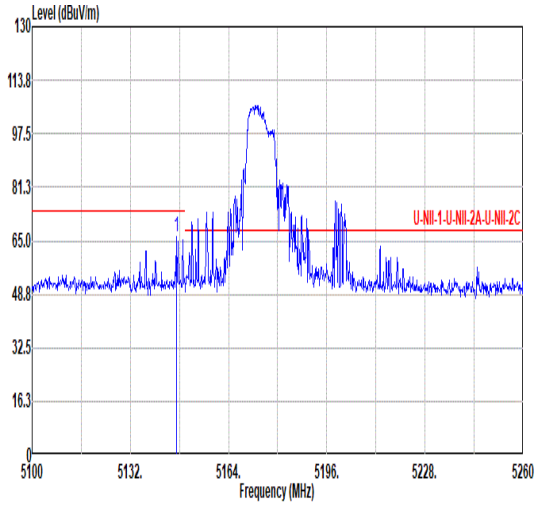 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.04 66.08 74.00 -7.92 54.00 34.19 9.78 31.89 0.00 392 61 PEAK	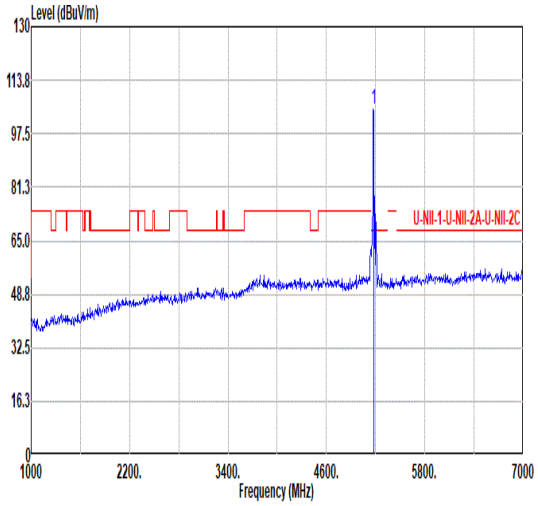 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 105.05 ------ ------ 92.93 34.20 9.80 31.88 0.00 392 61 PEAK
Avg	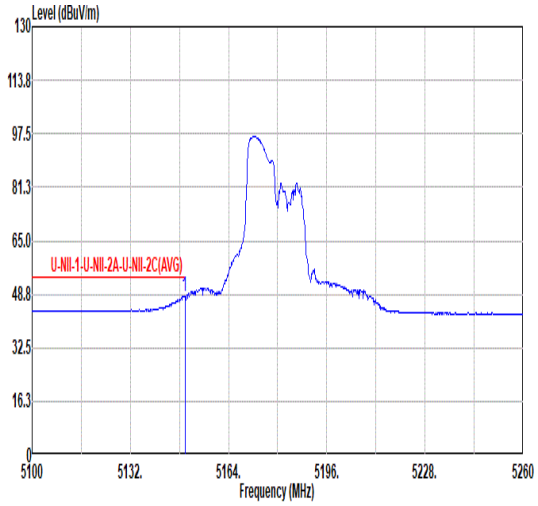 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.76 48.25 54.00 -5.75 36.15 34.20 9.79 31.89 0.00 392 61 AVERAGE	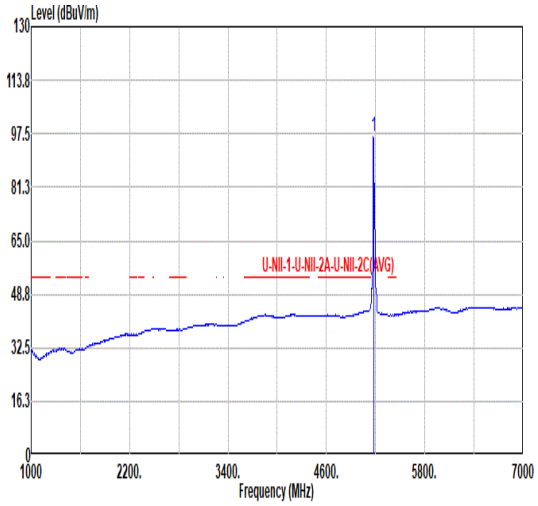 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 96.53 ------ ------ 84.41 34.20 9.80 31.88 0.00 392 61 AVERAGE

Mode	28	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_RU106/54_5320MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	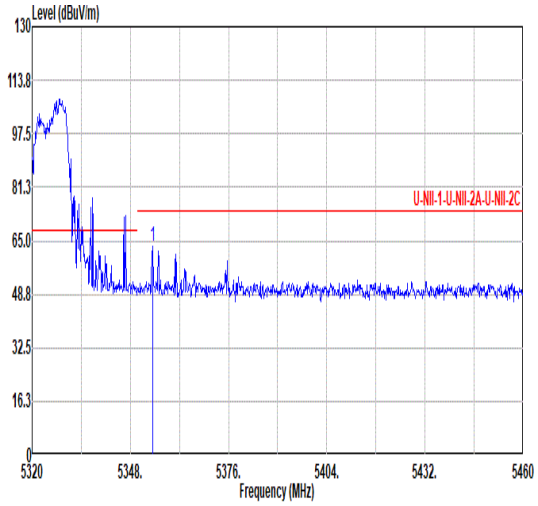 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5354.44 63.09 74.00 -10.91 50.35 34.61 9.91 31.78 0.00 100 237 PEAK	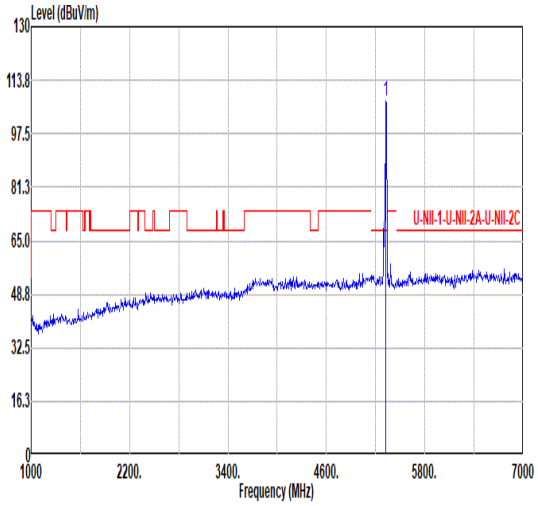 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 107.25 ------ ------ 94.60 34.55 9.90 31.80 0.00 100 237 PEAK
Avg	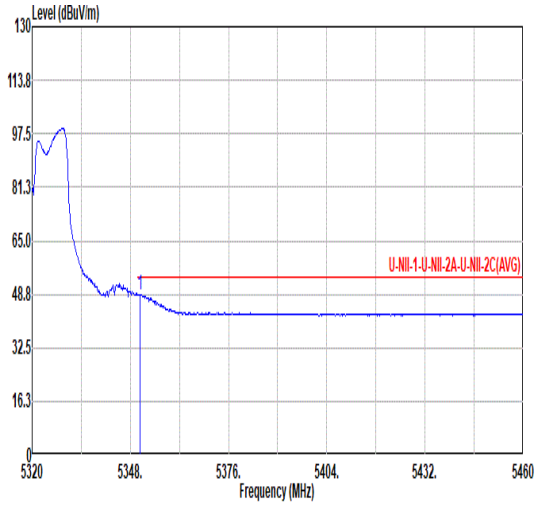 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.80 48.69 54.00 -5.31 35.96 34.60 9.91 31.78 0.00 100 237 AVERAGE	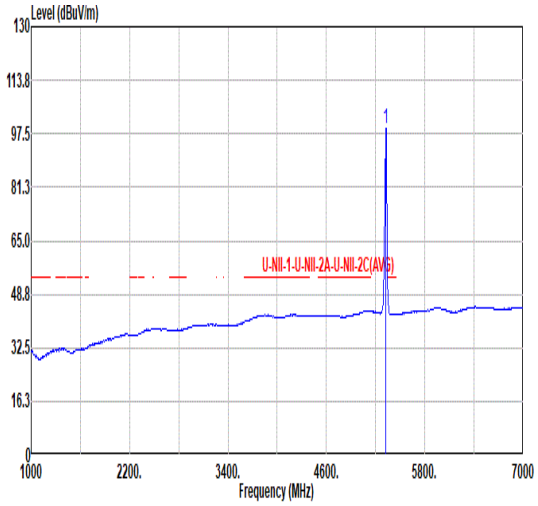 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 99.13 ------ ------ 86.48 34.55 9.90 31.80 0.00 100 237 AVERAGE

Mode	28	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_RU106/54_5320MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	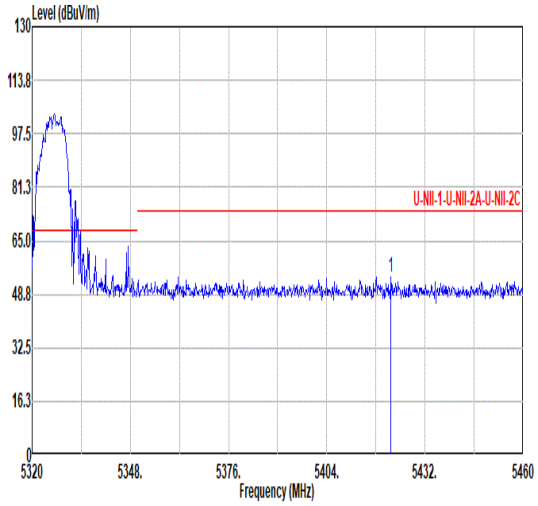 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5422.34 54.05 74.00 -19.95 41.09 34.74 9.97 31.75 0.00 100 202 PEAK	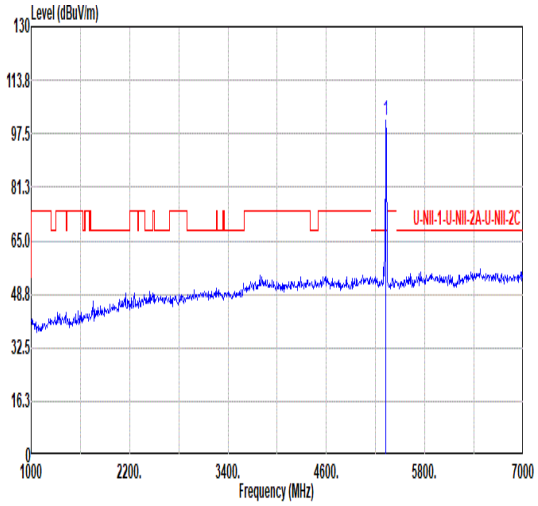 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 101.68 ------ ------ 89.03 34.55 9.90 31.80 0.00 100 202 PEAK
Avg	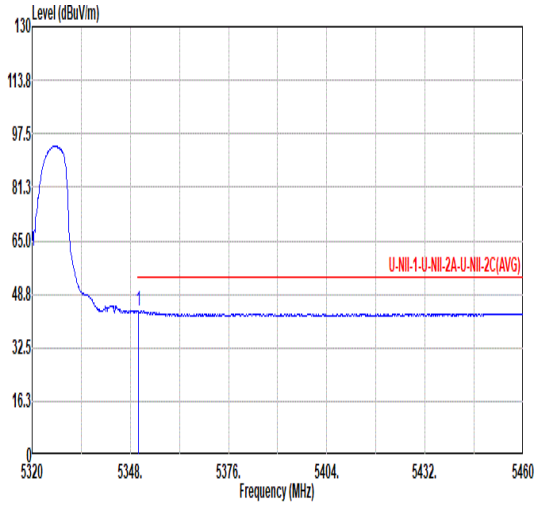 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.24 43.79 54.00 -10.21 31.06 34.60 9.91 31.78 0.00 100 202 AVERAGE	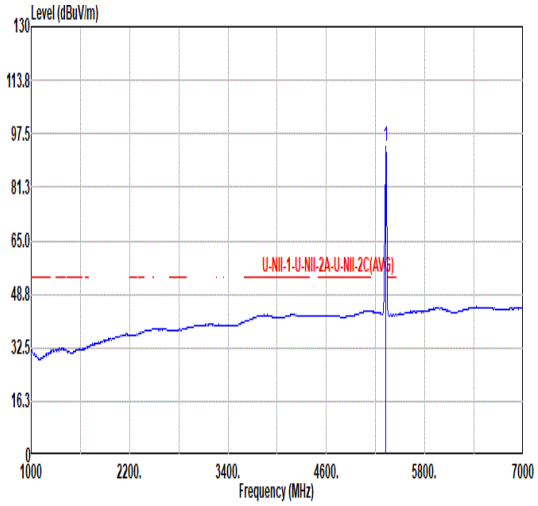 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 93.75 ------ ------ 81.10 34.55 9.90 31.80 0.00 100 202 AVERAGE

Mode	29	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_RU106/53_5500MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	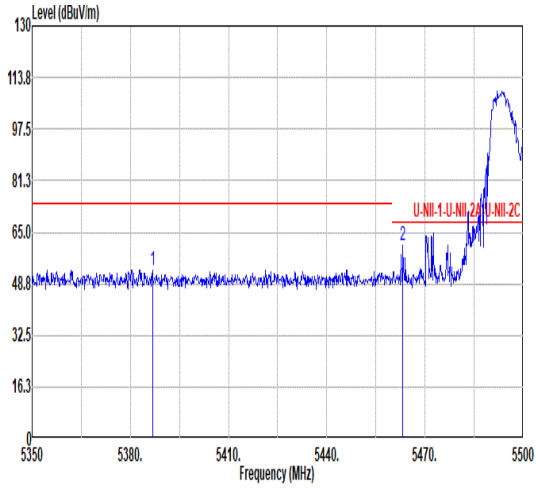 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5386.75 53.16 74.00 -20.84 40.32 34.67 9.93 31.76 0.00 109 269 PEAK 2 5463.25 60.72 68.20 -7.48 47.64 34.77 10.03 31.72 0.00 109 269 PEAK	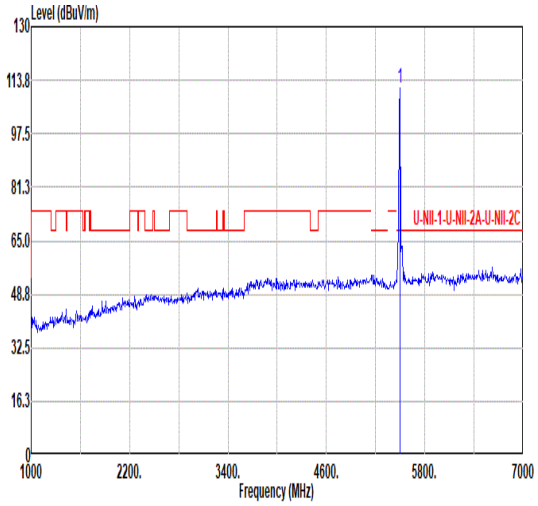 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 111.17 ------ ------ 98.09 34.71 10.08 31.71 0.00 109 269 PEAK
Avg	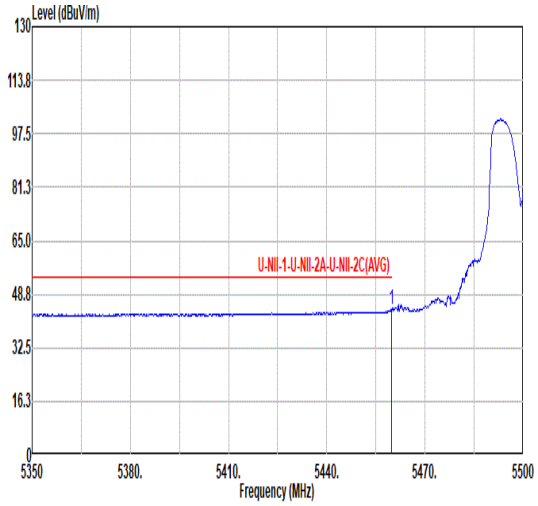 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.80 44.16 54.00 -9.84 31.08 34.78 10.03 31.73 0.00 109 269 AVERAGE	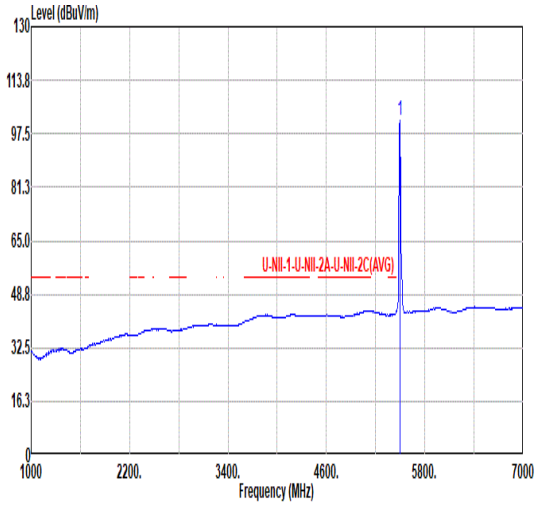 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 101.66 ------ ------ 88.58 34.71 10.08 31.71 0.00 109 269 AVERAGE

Mode	29	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_RU106/53_5500MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	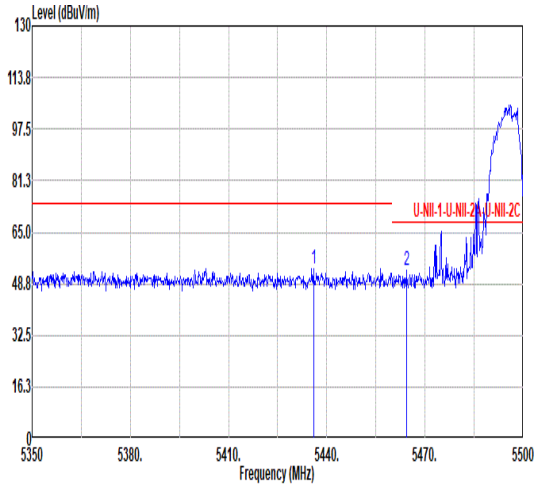 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5435.95 53.59 74.00 -20.41 40.57 34.77 9.99 31.74 0.00 318 44 PEAK 2 5464.30 52.97 68.20 -15.23 39.89 34.77 10.03 31.72 0.00 318 44 PEAK	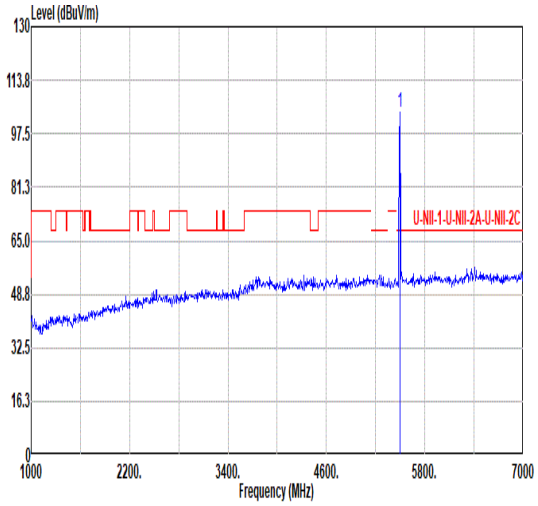 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 104.19 ------ ------ 91.11 34.71 10.08 31.71 0.00 318 44 PEAK
Avg	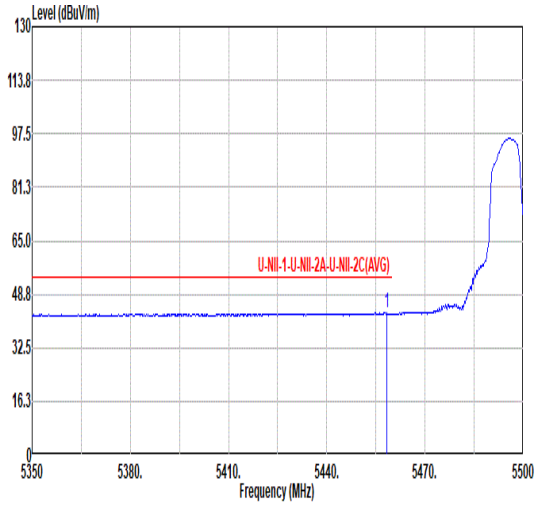 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.30 43.01 54.00 -10.99 29.94 34.78 10.02 31.73 0.00 318 44 AVERAGE	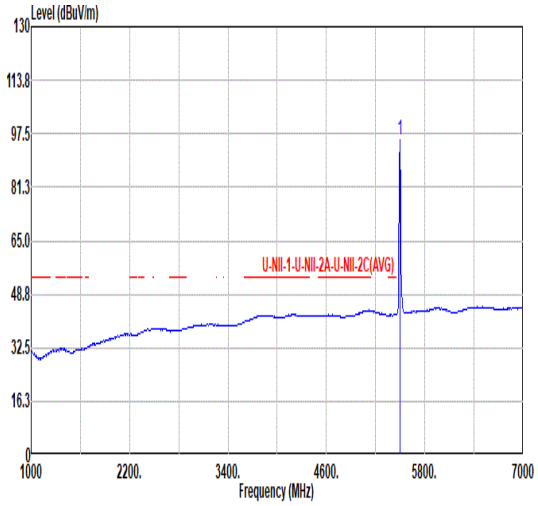 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 95.84 ------ ------ 82.76 34.71 10.08 31.71 0.00 318 44 AVERAGE

Mode	30	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_RU106/54_5700MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	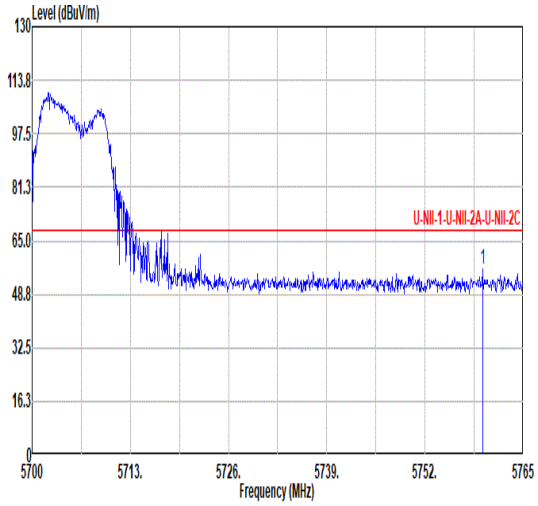 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5759.61 56.59 68.20 -11.61 43.55 34.60 10.37 31.93 0.00 100 246 PEAK	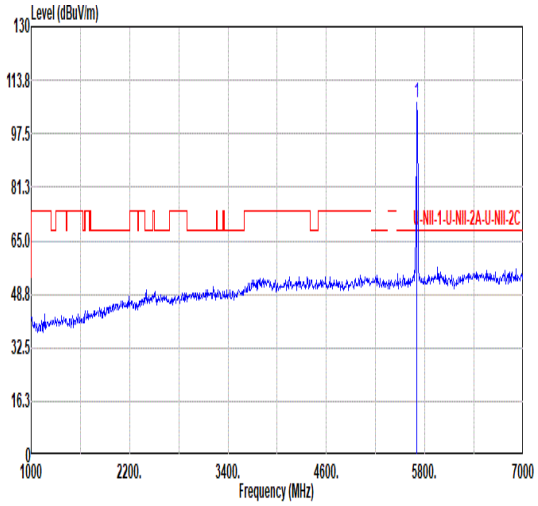 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 107.03 ------ ------ 93.89 34.60 10.33 31.79 0.00 100 246 PEAK
Avg	Blank	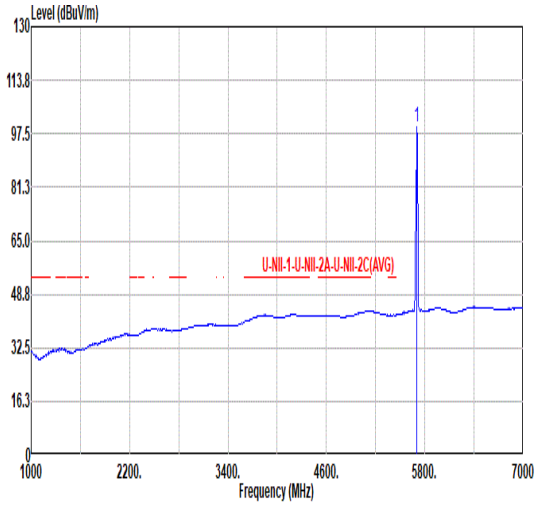 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 99.44 ------ ------ 86.30 34.60 10.33 31.79 0.00 100 246 AVERAGE

Mode	30	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_RU106/54_5700MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	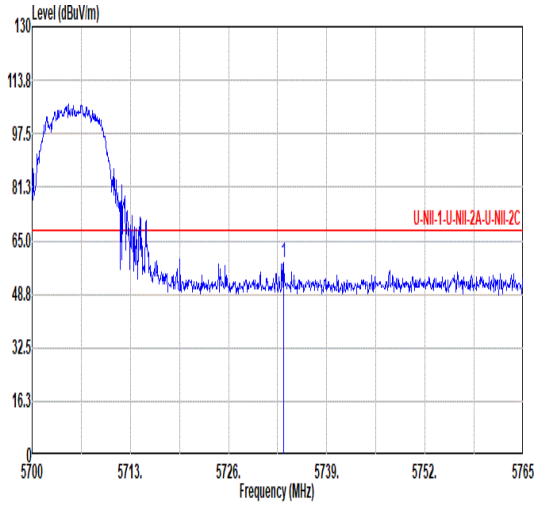 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5733.28 58.55 68.20 -9.65 45.46 34.60 10.35 31.86 0.00 318 52 PEAK	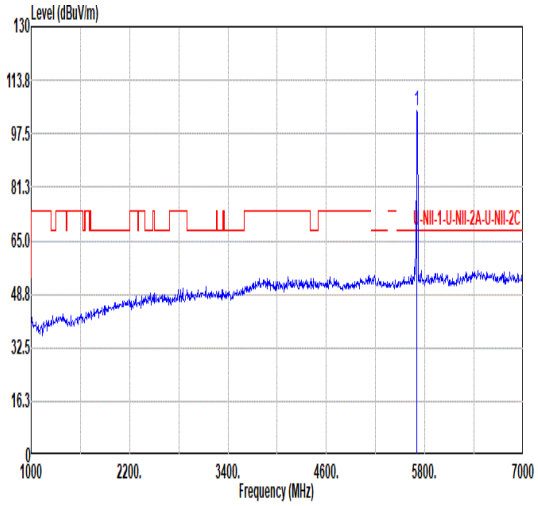 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 104.66 ------ ------ 91.52 34.60 10.33 31.79 0.00 318 52 PEAK
Avg	Blank	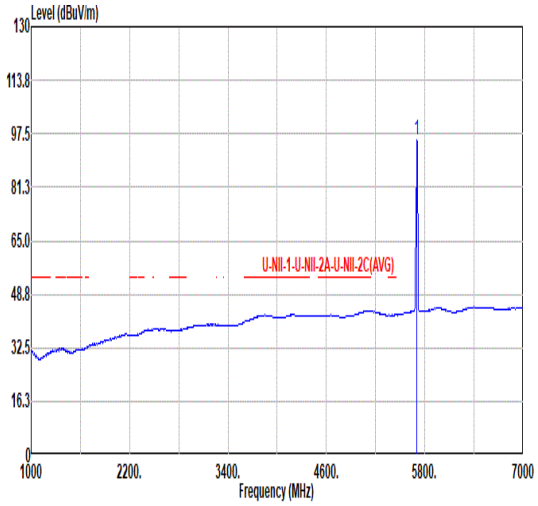 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 95.80 ------ ------ 82.66 34.60 10.33 31.79 0.00 318 52 AVERAGE

Mode	31	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full_5190MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	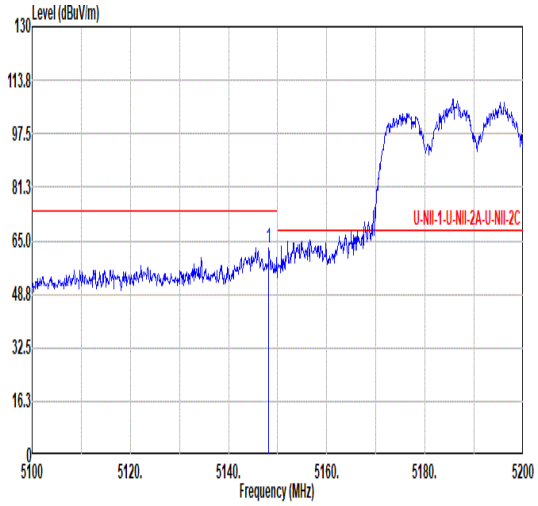 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.20 62.78 74.00 -11.22 50.68 34.20 9.79 31.89 0.00 100 312 PEAK	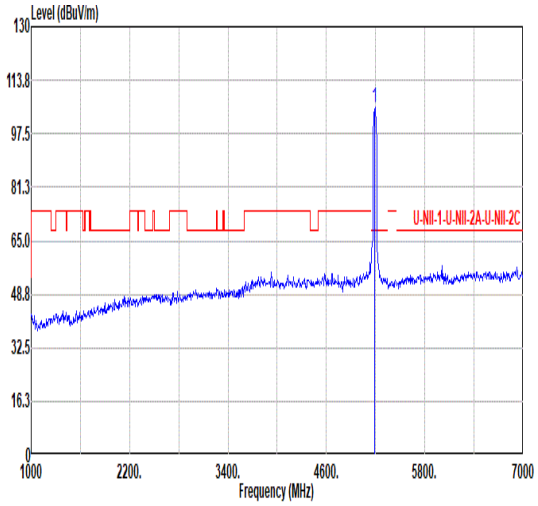 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5190.00 105.31 ------ ------ 93.15 34.20 9.83 31.87 0.00 100 312 PEAK
Avg	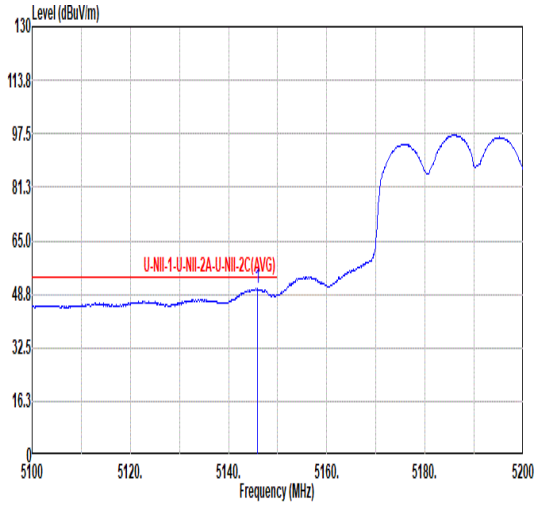 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5145.90 50.63 54.00 -3.37 38.55 34.19 9.78 31.89 0.00 100 312 AVERAGE	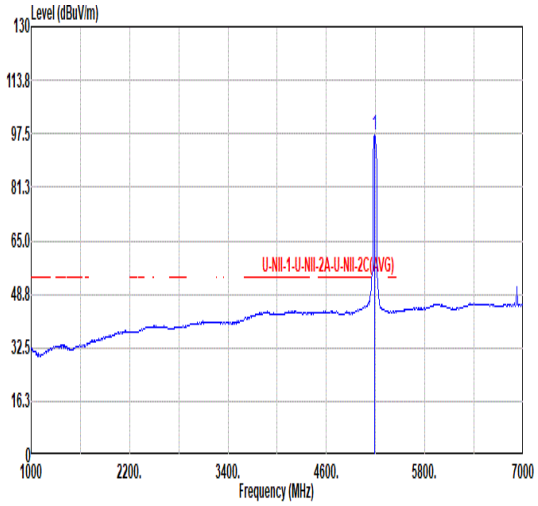 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5190.00 97.31 ------ ------ 85.16 34.20 9.82 31.87 0.00 100 312 AVERAGE

Mode	31	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full_5190MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	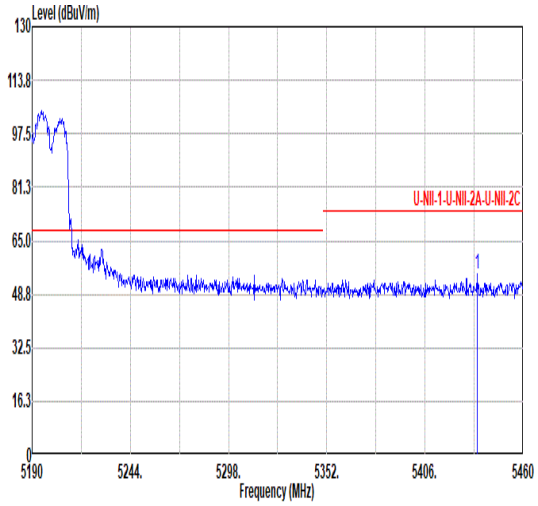 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5434.62 54.73 74.00 -19.27 41.71 34.77 9.99 31.74 0.00 100 312 PEAK	Blank
Avg	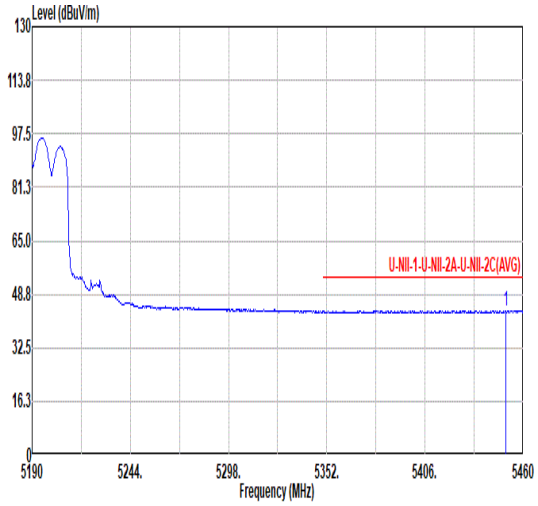 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5450.55 43.85 54.00 -10.15 30.77 34.80 10.01 31.73 0.00 100 312 AVERAGE	Blank

Mode	31	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full_5190MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	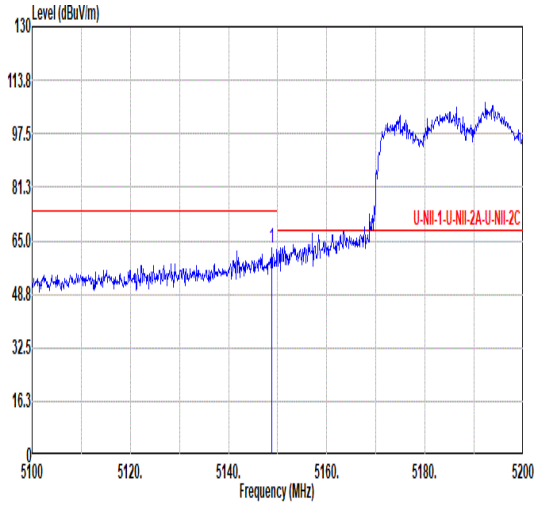 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.80 62.80 74.00 -11.20 50.70 34.20 9.79 31.89 0.00 364 60 PEAK	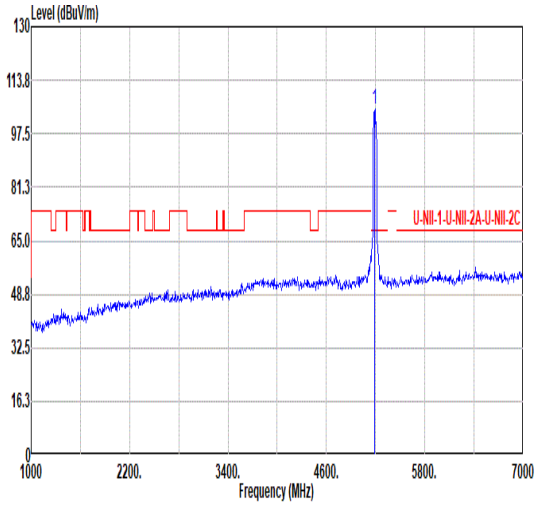 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5190.00 104.87 ------ ------ 92.71 34.20 9.83 31.87 0.00 364 60 PEAK
Avg	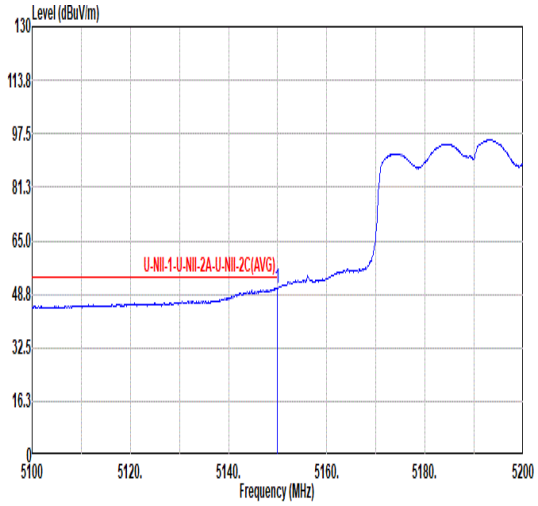 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.90 50.75 54.00 -3.25 38.65 34.20 9.79 31.89 0.00 364 60 AVERAGE	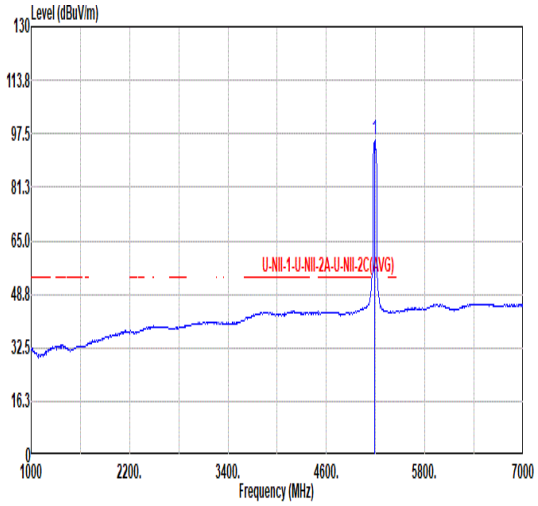 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5190.00 95.84 ------ ------ 83.68 34.20 9.83 31.87 0.00 364 60 AVERAGE

Mode	31	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full_5190MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	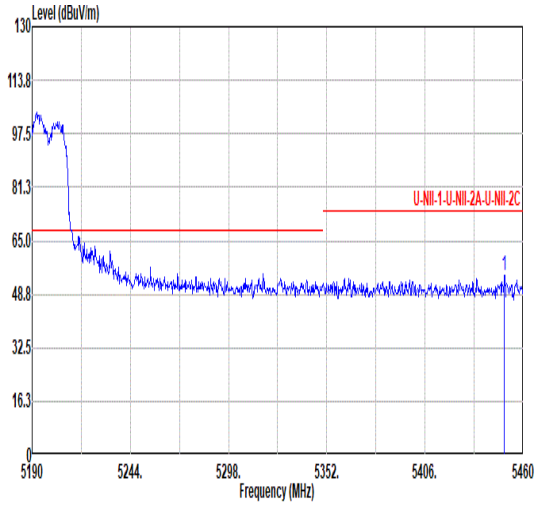 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5449.74 54.56 74.00 -19.44 41.48 34.80 10.01 31.73 0.00 364 60 PEAK	Blank
Avg	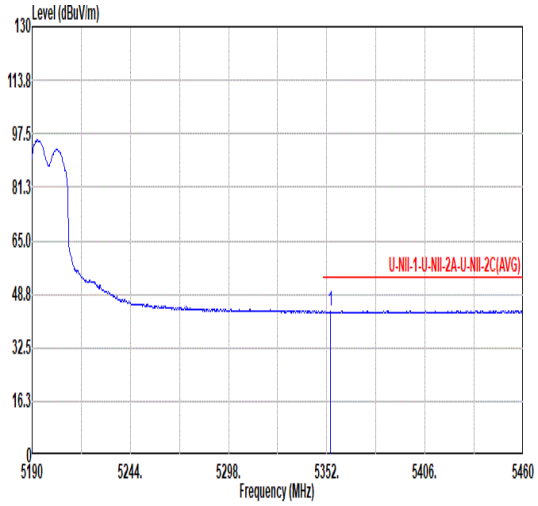 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.89 43.75 54.00 -10.25 31.01 34.61 9.91 31.78 0.00 364 60 AVERAGE	Blank

Mode	31	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full_5190MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	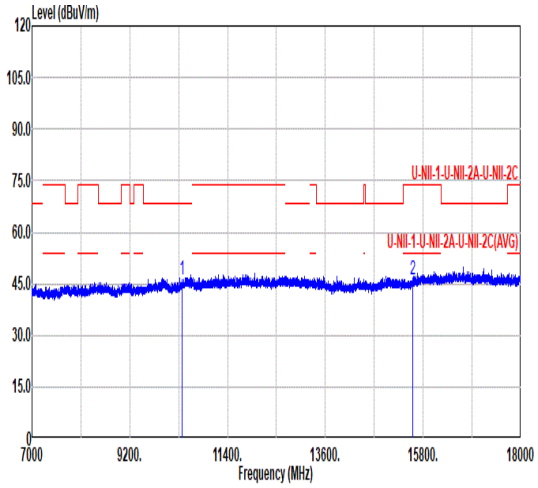 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10380.00 46.34 68.20 -21.86 56.02 37.46 14.14 61.28 0.00 --- --- PEAK 2 15570.00 46.25 74.00 -27.75 52.38 40.14 17.53 63.80 0.00 --- --- PEAK	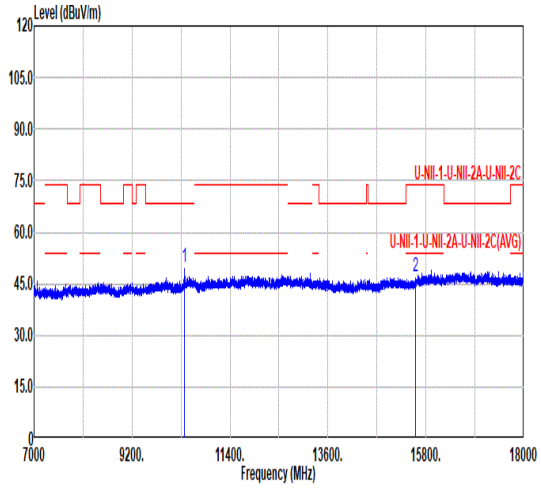 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10380.00 49.65 68.20 -18.55 59.33 37.46 14.14 61.28 0.00 --- --- PEAK 2 15570.00 46.97 74.00 -27.03 53.10 40.14 17.53 63.80 0.00 --- --- PEAK

Mode	32	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full_5230MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	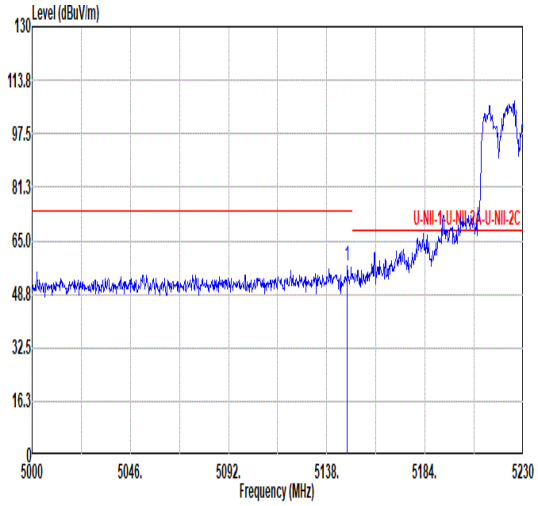 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.66 57.32 74.00 -16.68 45.23 34.20 9.78 31.89 0.00 100 270 PEAK	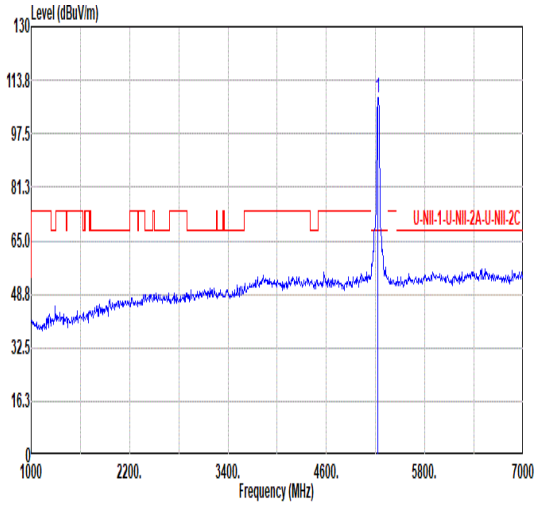 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5230.00 108.66 ------ ------ 96.38 34.27 9.85 31.84 0.00 100 270 PEAK
Avg	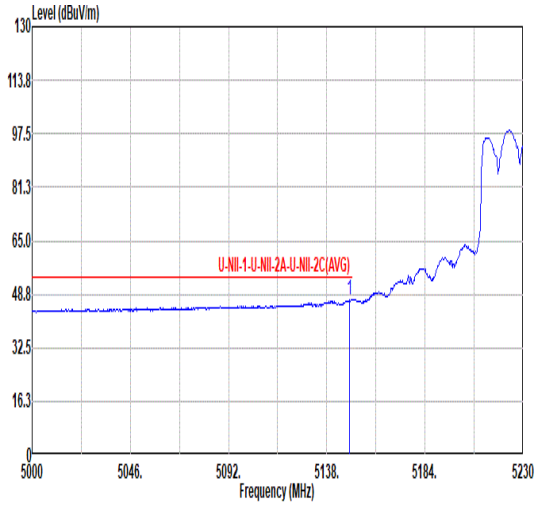 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.58 47.06 54.00 -6.94 34.96 34.20 9.79 31.89 0.00 100 270 AVERAGE	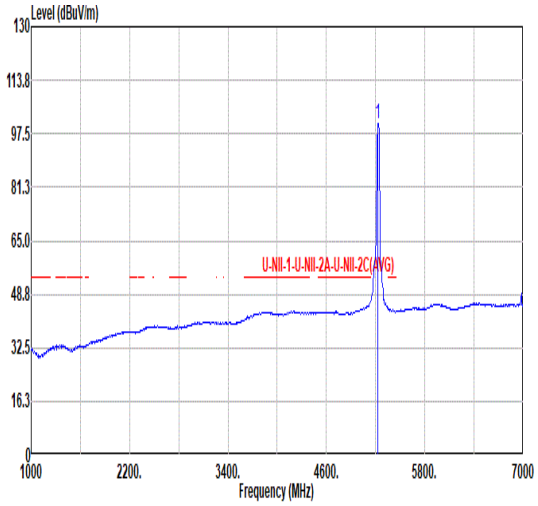 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5230.00 100.48 ------ ------ 88.22 34.26 9.85 31.85 0.00 100 270 AVERAGE

Mode	32	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full_5230MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	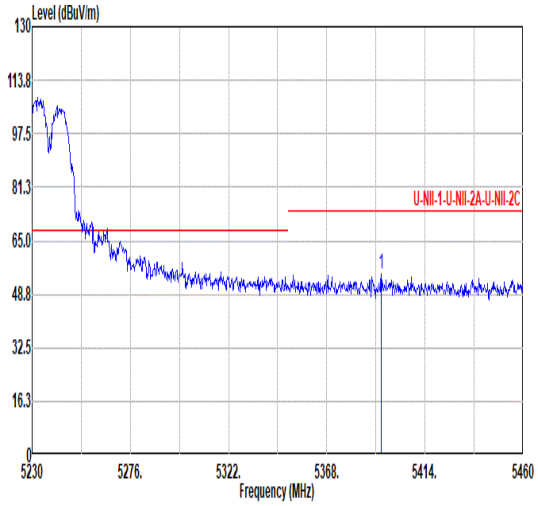 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5393.53 54.89 74.00 -19.11 42.03 34.69 9.93 31.76 0.00 100 270 PEAK	Blank
Avg	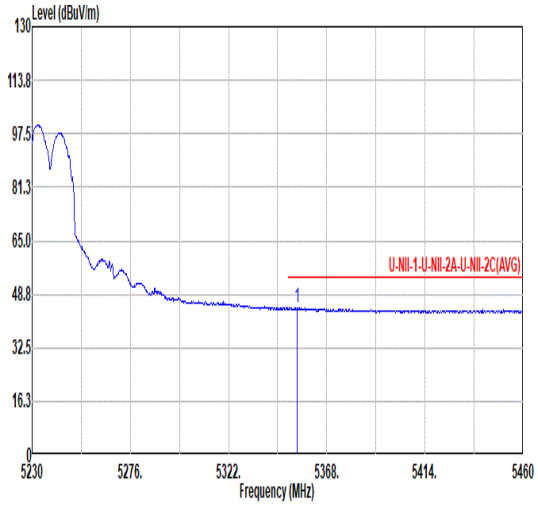 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.97 44.73 54.00 -9.27 31.99 34.61 9.91 31.78 0.00 100 270 AVERAGE	Blank

Mode	32	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full_5230MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	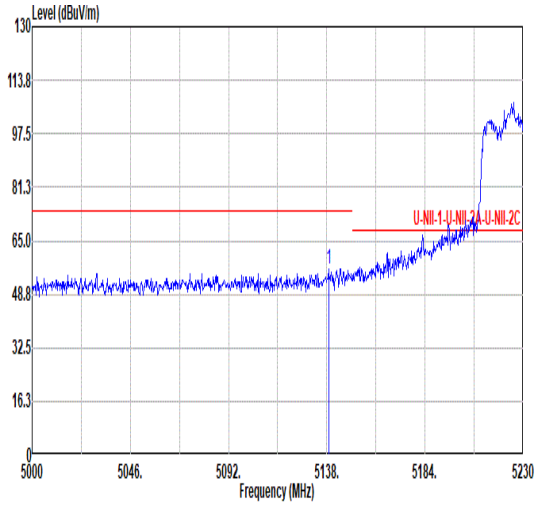 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5138.92 56.51 74.00 -17.49 44.45 34.18 9.78 31.90 0.00 339 57 PEAK	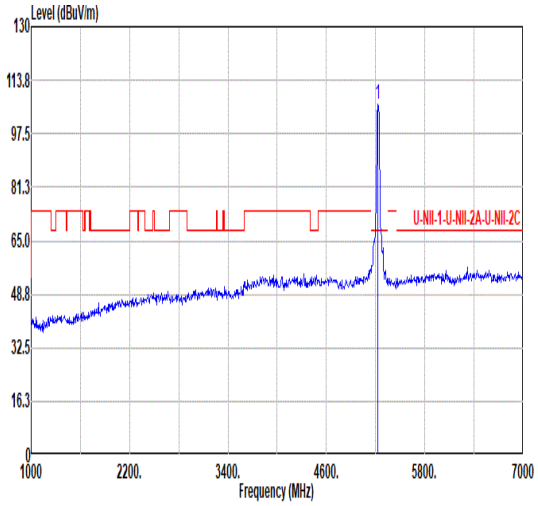 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5230.00 106.64 ------ ------ 94.40 34.25 9.84 31.85 0.00 339 57 PEAK
Avg	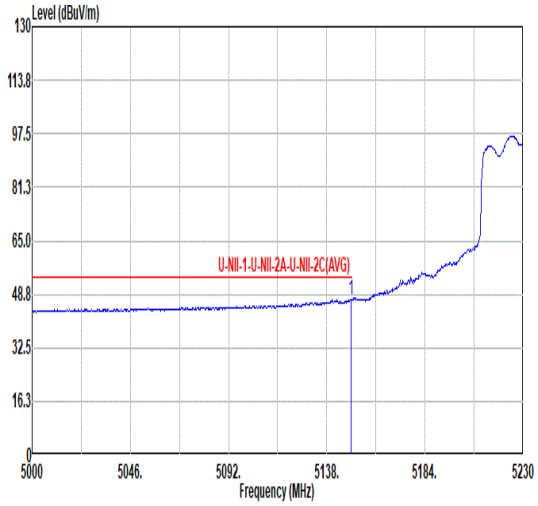 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.27 47.11 54.00 -6.89 35.01 34.20 9.79 31.89 0.00 339 57 AVERAGE	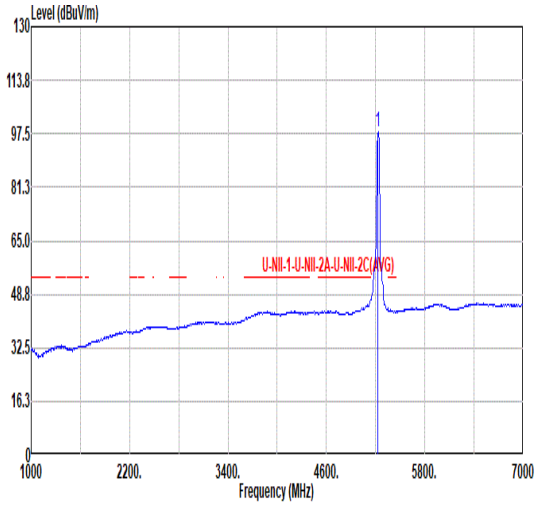 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5230.00 97.87 ------ ------ 85.59 34.27 9.85 31.84 0.00 339 57 AVERAGE

Mode	32	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full_5230MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	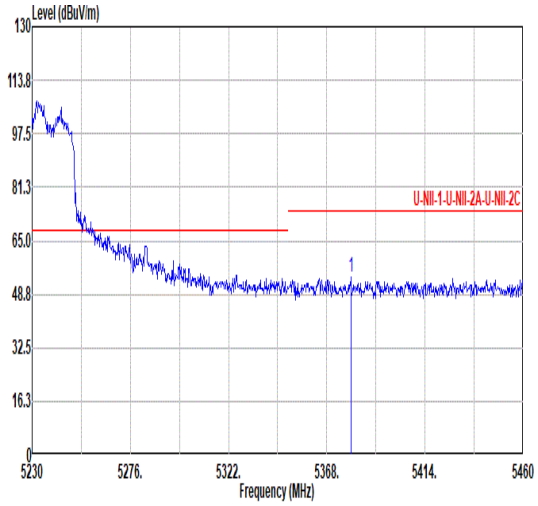 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5379.27 53.94 74.00 -20.06 41.12 34.66 9.93 31.77 0.00 339 57 PEAK	Blank
Avg	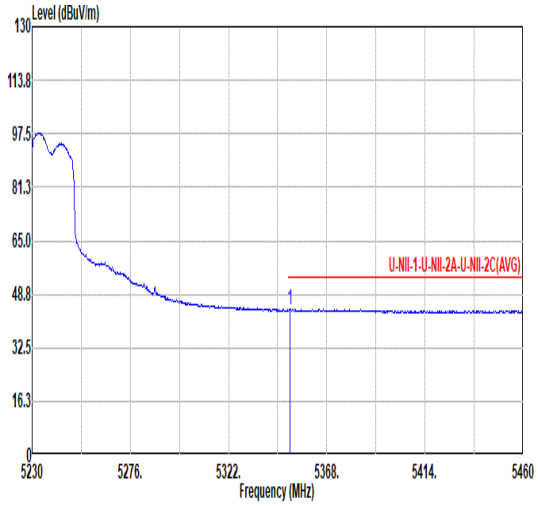 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.75 44.23 54.00 -9.77 31.50 34.60 9.91 31.78 0.00 339 57 AVERAGE	Blank

Mode	32	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full_5230MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	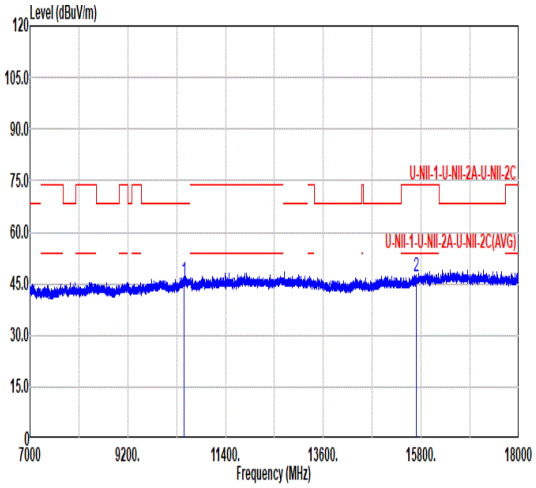 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10460.00 45.83 68.20 -22.37 55.28 37.62 14.20 61.27 0.00 --- --- PEAK 2 15690.00 47.17 74.00 -26.83 53.00 40.38 17.59 63.80 0.00 --- --- PEAK	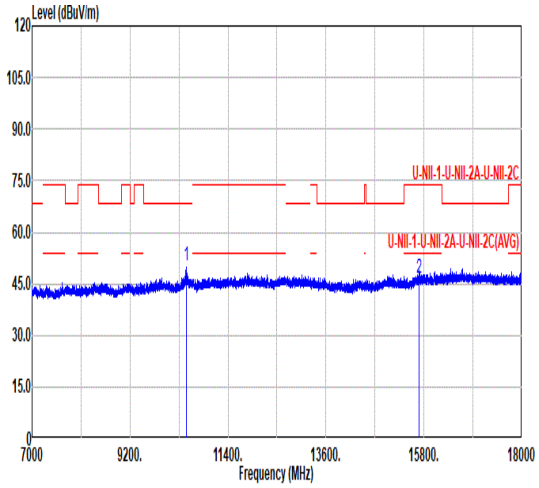 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10460.00 50.39 68.20 -17.81 59.84 37.62 14.20 61.27 0.00 --- --- PEAK 2 15690.00 46.52 74.00 -27.48 52.35 40.38 17.59 63.80 0.00 --- --- PEAK

Mode	33	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full_5270MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	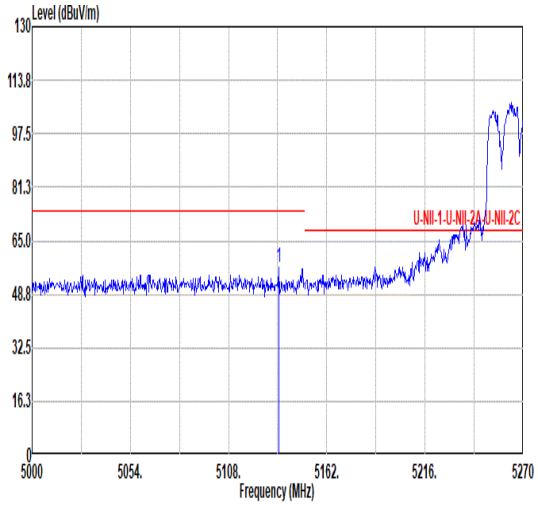 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5135.54 56.94 74.00 -17.06 44.90 34.17 9.77 31.90 0.00 100 267 PEAK	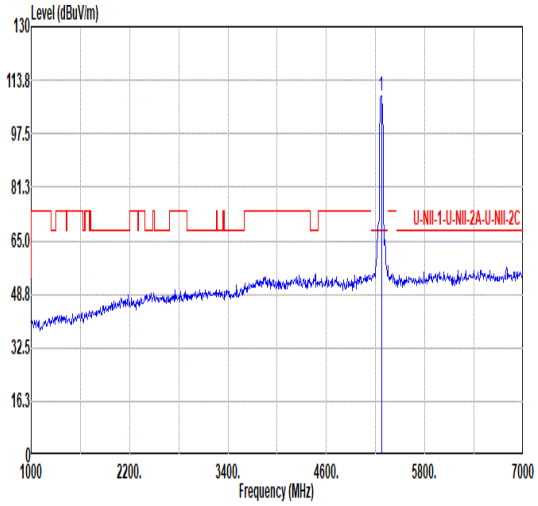 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5270.00 108.98 ------ ------ 96.55 34.39 9.87 31.83 0.00 100 267 PEAK
Avg	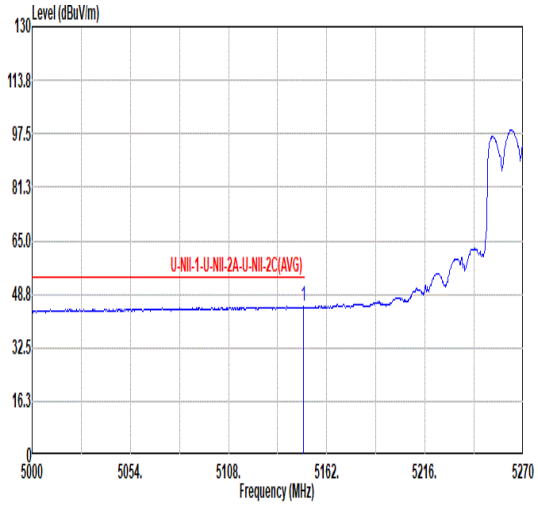 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.31 44.98 54.00 -9.02 32.88 34.20 9.79 31.89 0.00 100 267 AVERAGE	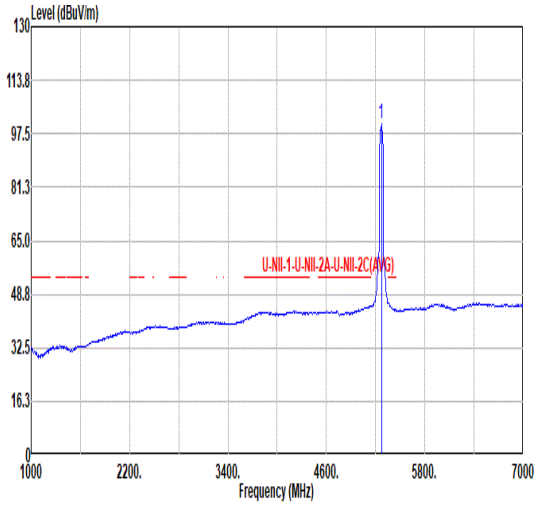 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5270.00 100.75 ------ ------ 88.32 34.39 9.87 31.83 0.00 100 267 AVERAGE

Mode	33	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full_5270MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	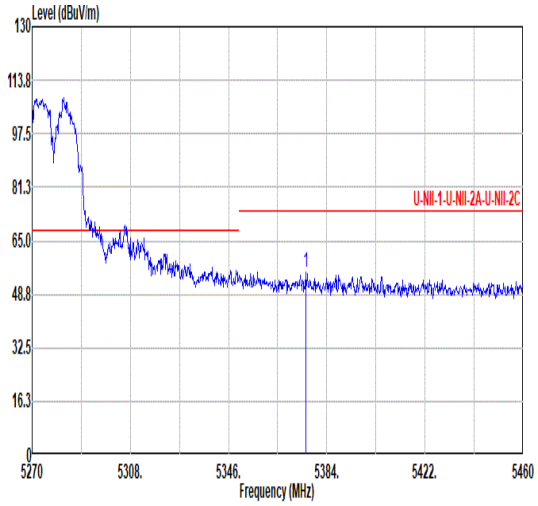 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5375.83 55.64 74.00 -18.36 42.83 34.65 9.93 31.77 0.00 100 267 PEAK	Blank
Avg	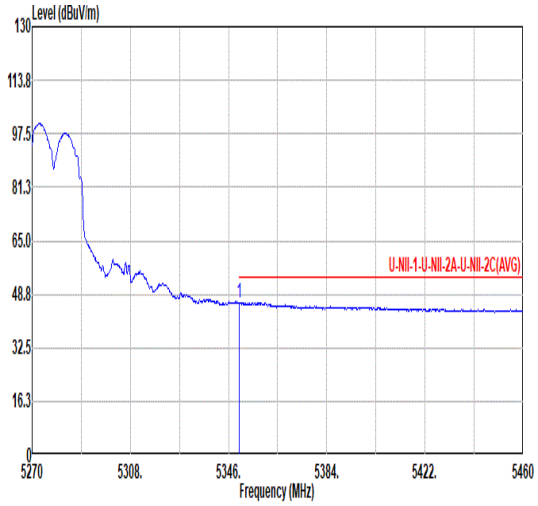 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.18 46.17 54.00 -7.83 33.44 34.60 9.91 31.78 0.00 100 267 AVERAGE	Blank

Mode	33	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full_5270MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	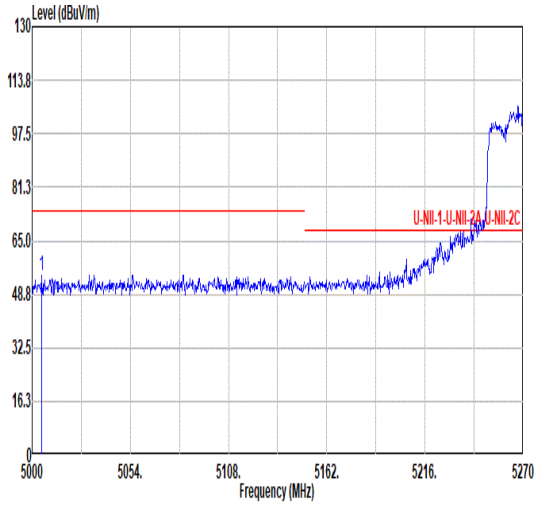 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5005.13 54.66 74.00 -19.34 42.96 34.00 9.66 31.96 0.00 337 56 PEAK	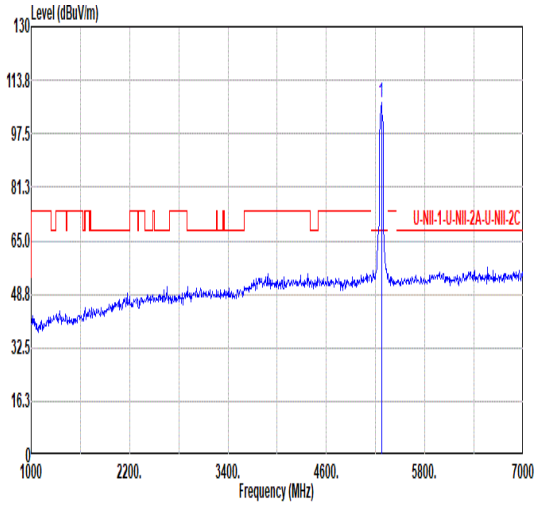 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5270.00 106.70 ------ ------ 94.27 34.39 9.87 31.83 0.00 337 56 PEAK
Avg	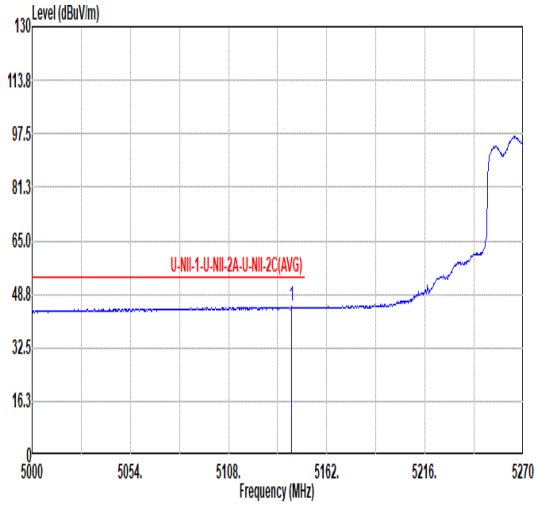 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5142.56 44.90 54.00 -9.10 32.82 34.19 9.78 31.89 0.00 337 56 AVERAGE	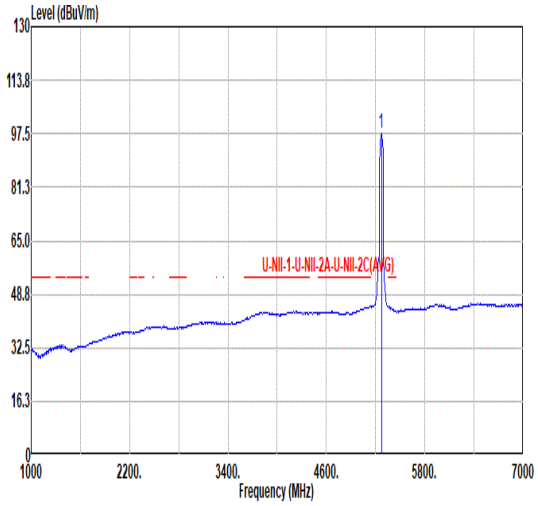 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5270.00 97.53 ------ ------ 85.10 34.39 9.87 31.83 0.00 337 56 AVERAGE

Mode	33	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full_5270MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	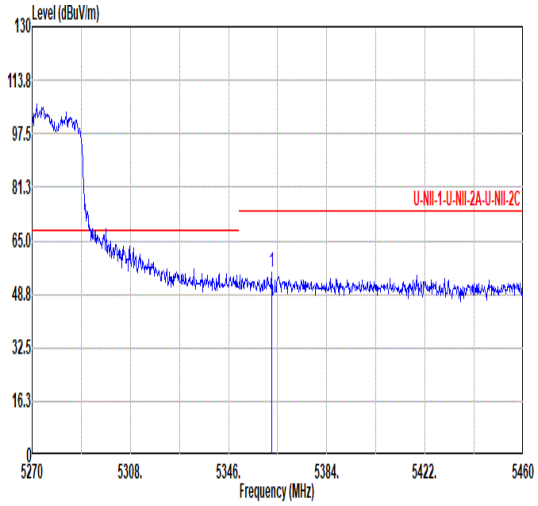 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5362.72 55.41 74.00 -18.59 42.64 34.63 9.92 31.78 0.00 337 56 PEAK	Blank
Avg	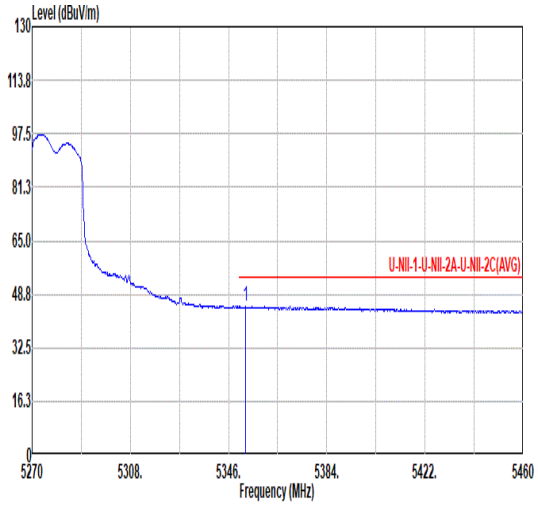 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.65 45.09 54.00 -8.91 32.35 34.61 9.91 31.78 0.00 337 56 AVERAGE	Blank

Mode	33	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full_5270MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	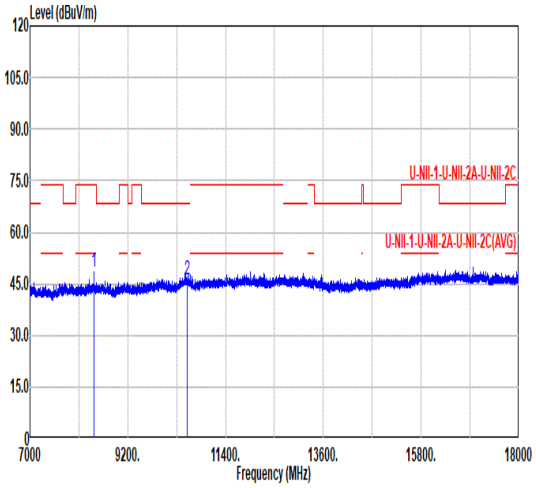 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8432.20 48.45 74.00 -25.55 60.67 35.90 12.72 60.84 0.00 --- --- Peak 2 10540.00 46.00 68.20 -22.20 55.23 37.78 14.25 61.26 0.00 --- --- PEAK	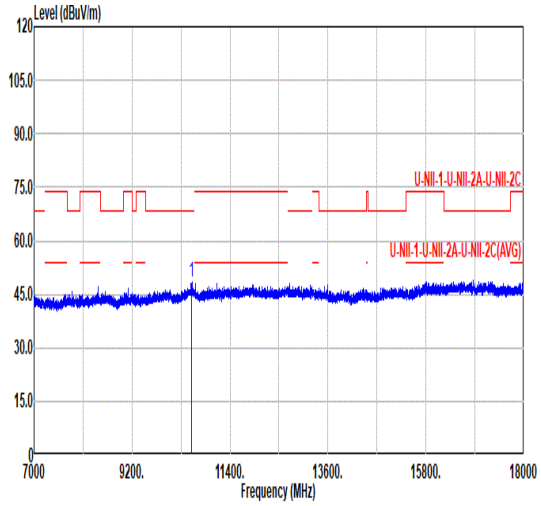 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10540.00 48.31 68.20 -19.89 57.54 37.78 14.25 61.26 0.00 --- --- PEAK

Mode	34	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full_5310MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	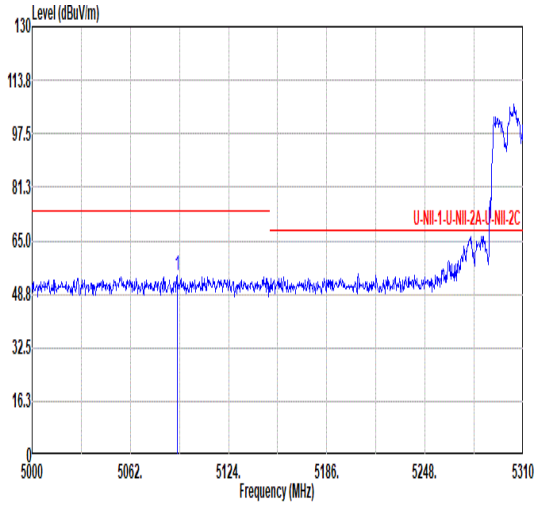 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5091.45 54.40 74.00 -19.60 42.50 34.08 9.74 31.92 0.00 119 264 PEAK	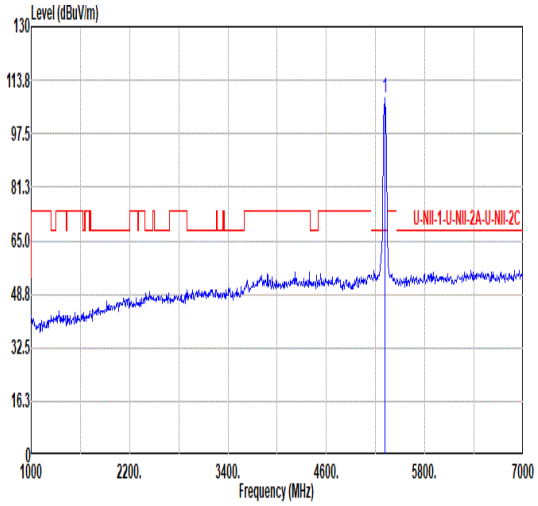 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5310.00 108.43 ------ ------ 95.81 34.53 9.89 31.80 0.00 119 264 PEAK
Avg	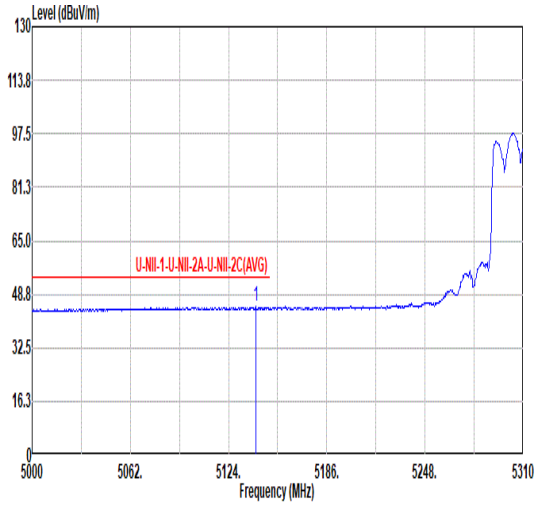 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5141.05 44.93 54.00 -9.07 32.86 34.18 9.78 31.89 0.00 119 264 AVERAGE	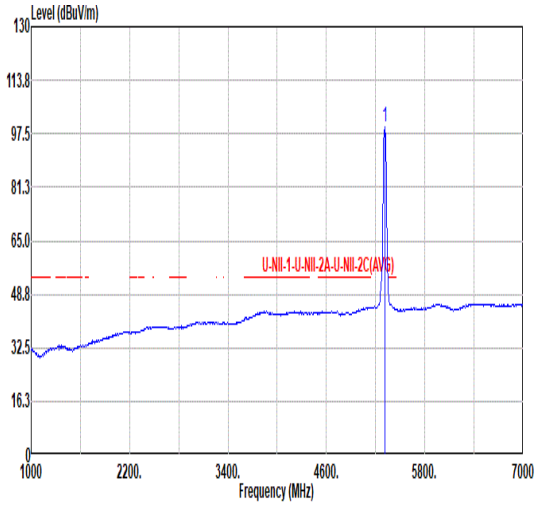 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5310.00 99.48 ------ ------ 86.86 34.53 9.89 31.80 0.00 119 264 AVERAGE

Mode	34	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full_5310MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	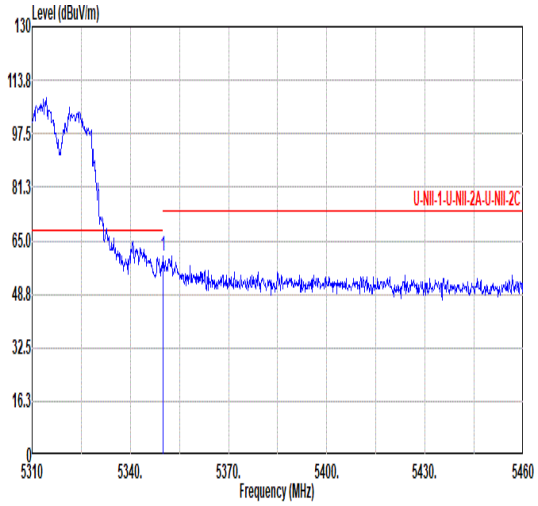 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.05 60.53 74.00 -13.47 47.80 34.60 9.91 31.78 0.00 119 264 PEAK	Blank
Avg	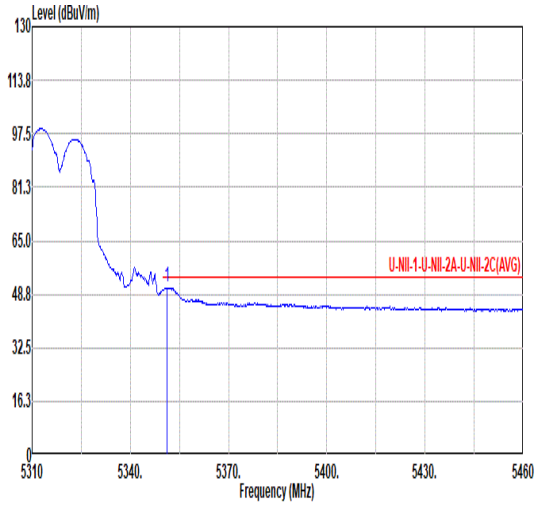 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.25 50.80 54.00 -3.20 38.07 34.60 9.91 31.78 0.00 119 264 AVERAGE	Blank

Mode	34	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full_5310MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	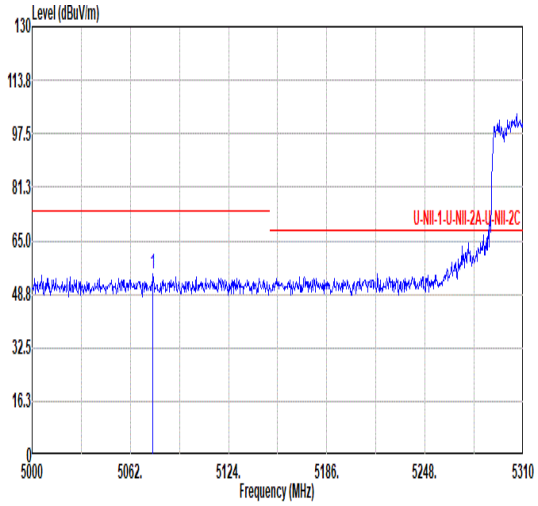 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5076.26 54.78 74.00 -19.22 42.94 34.05 9.72 31.93 0.00 372 63 PEAK	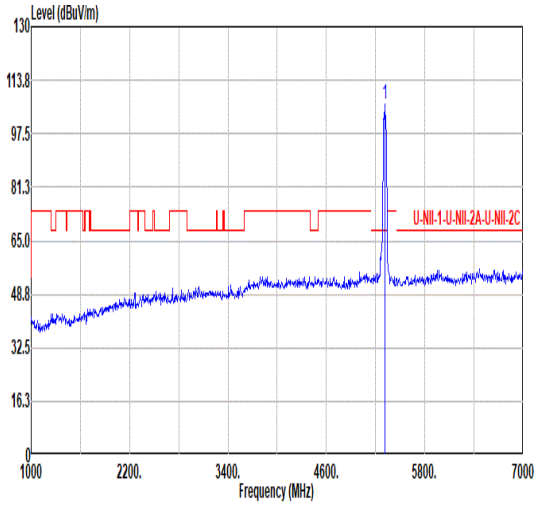 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5310.00 106.30 ------ ------ 93.68 34.53 9.89 31.80 0.00 372 63 PEAK
Avg	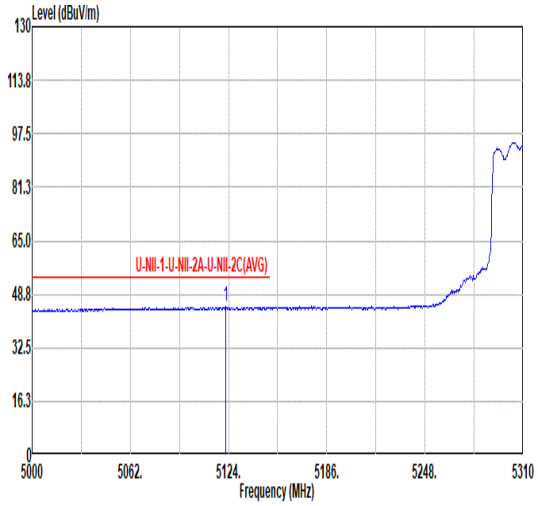 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5122.14 44.90 54.00 -9.10 32.90 34.14 9.76 31.90 0.00 372 63 AVERAGE	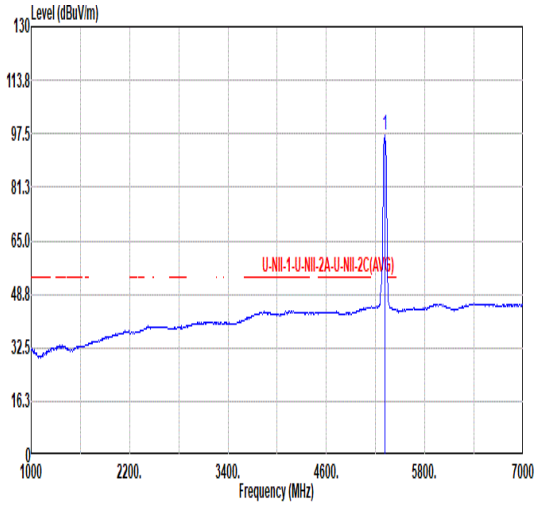 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5310.00 96.91 ------ ------ 84.29 34.53 9.89 31.80 0.00 372 63 AVERAGE

Mode	34	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full_5310MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	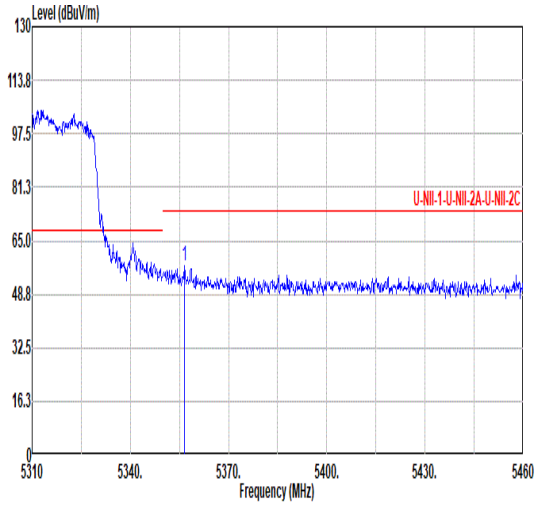 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5356.50 57.43 74.00 -16.57 44.69 34.61 9.91 31.78 0.00 372 63 PEAK	Blank
Avg	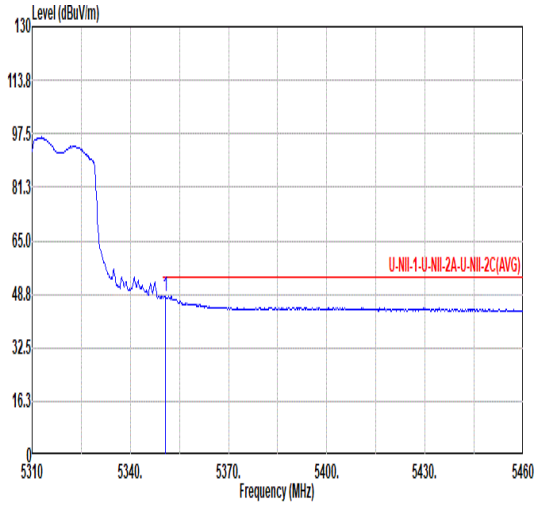 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.65 47.96 54.00 -6.04 35.23 34.60 9.91 31.78 0.00 372 63 AVERAGE	Blank

Mode	34	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full_5310MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	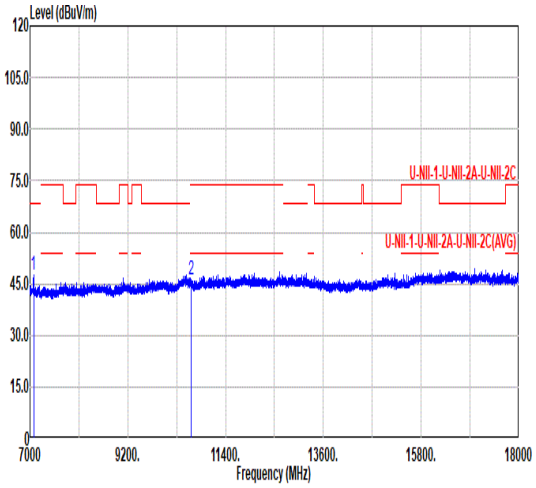 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7080.30 47.52 68.20 -20.68 60.58 35.60 11.55 60.21 0.00 --- --- Peak 2 10620.00 46.01 74.00 -27.99 55.08 37.88 14.31 61.26 0.00 --- --- PEAK	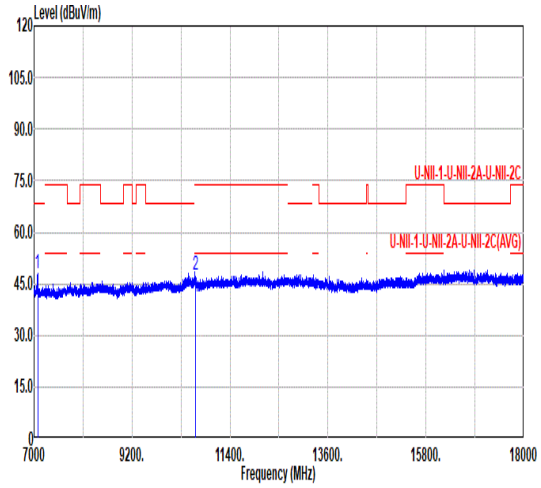 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7080.30 48.09 68.20 -20.11 61.15 35.60 11.55 60.21 0.00 --- --- Peak 2 10620.00 47.66 74.00 -26.34 56.73 37.88 14.31 61.26 0.00 --- --- PEAK

Mode	35	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full_5510MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	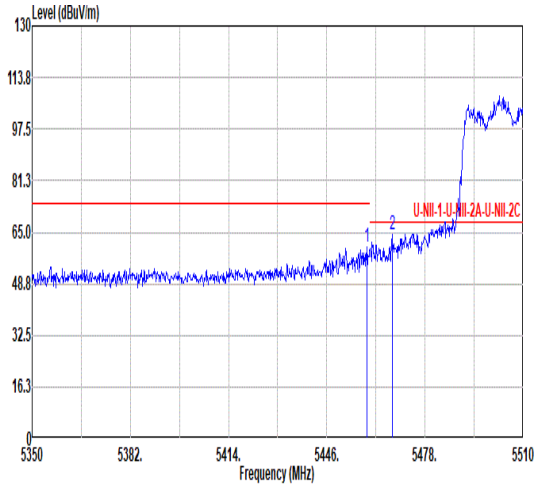 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.12 60.14 74.00 -13.86 47.06 34.78 10.03 31.73 0.00 101 243 PEAK 2 5467.28 64.07 68.20 -4.13 50.98 34.77 10.04 31.72 0.00 101 243 PEAK	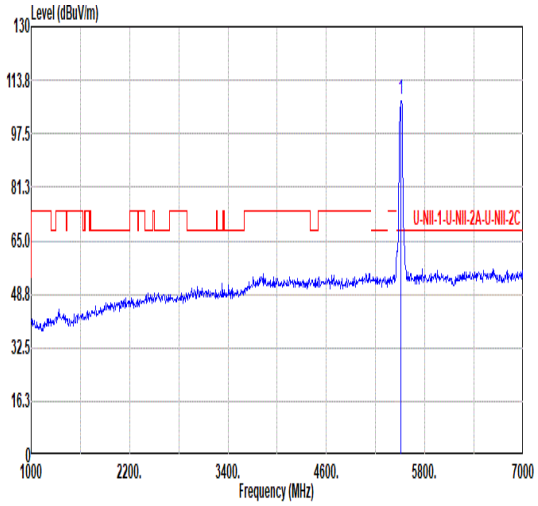 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 107.88 ------ ------ 94.80 34.68 10.10 31.70 0.00 101 243 PEAK
Avg	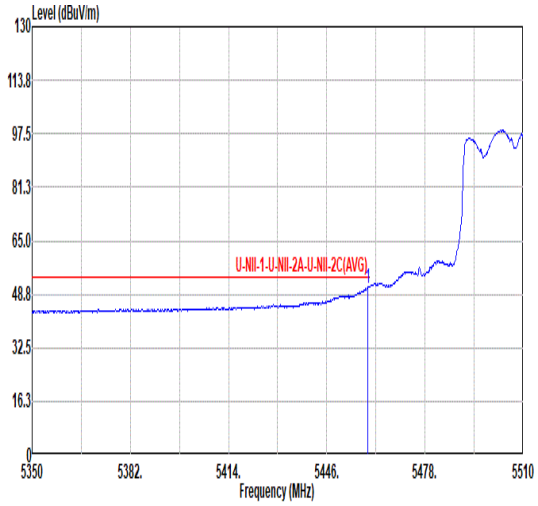 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.44 50.70 54.00 -3.30 37.62 34.78 10.03 31.73 0.00 101 243 AVERAGE	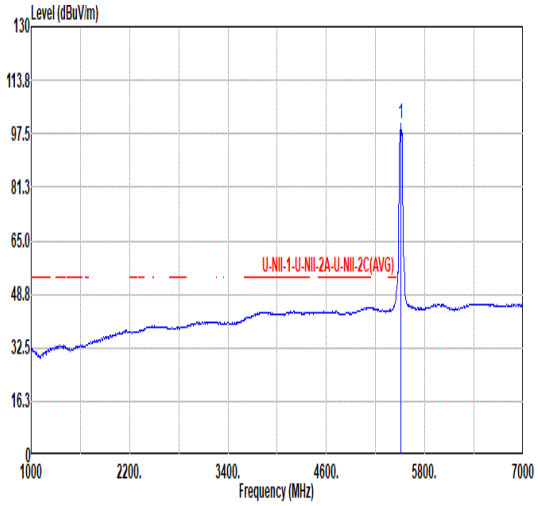 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 100.72 ------ ------ 87.63 34.68 10.11 31.70 0.00 101 243 AVERAGE

Mode	35	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full_5510MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	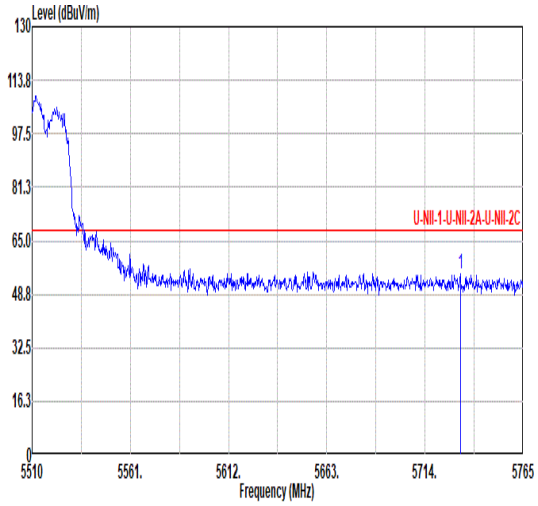 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5732.36 55.02 68.20 -13.18 41.93 34.60 10.35 31.86 0.00 101 243 PEAK	Blank

Mode	35	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full_5510MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	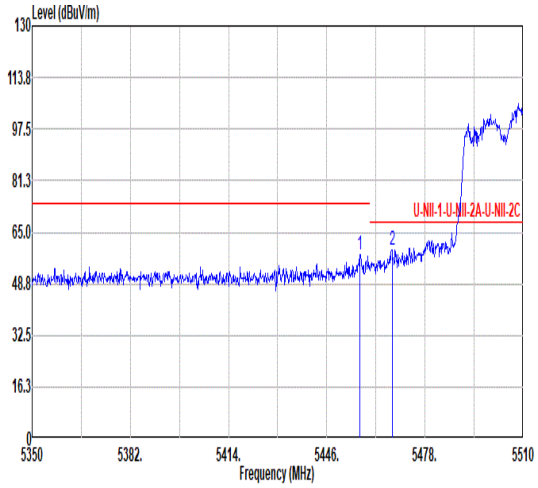 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5456.88 57.97 74.00 -16.03 44.89 34.79 10.02 31.73 0.00 303 46 PEAK 2 5467.28 59.53 68.20 -8.67 46.44 34.77 10.04 31.72 0.00 303 46 PEAK	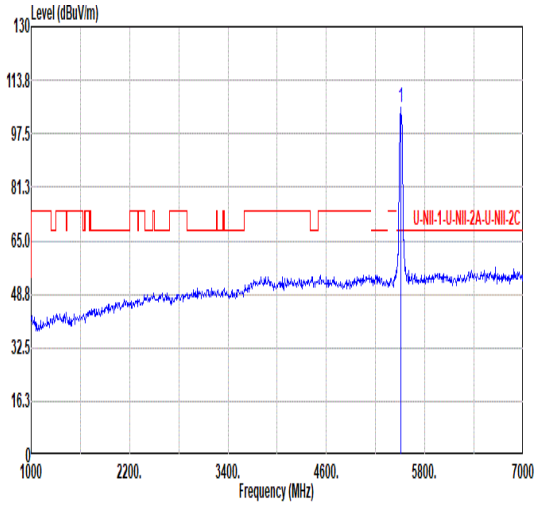 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 105.38 ------ ------ 92.29 34.69 10.10 31.70 0.00 303 46 PEAK
Avg	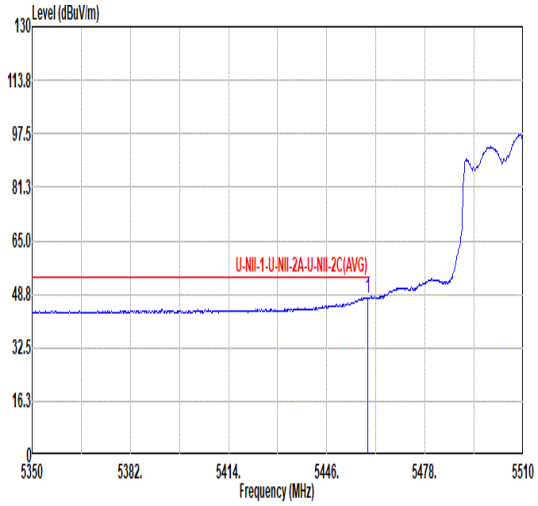 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.28 47.80 54.00 -6.20 34.72 34.78 10.03 31.73 0.00 303 46 AVERAGE	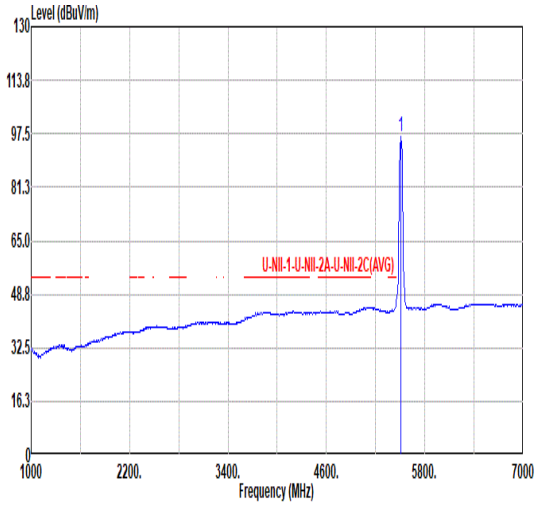 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 96.80 ------ ------ 83.71 34.69 10.10 31.70 0.00 303 46 AVERAGE

Mode	35	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full_5510MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	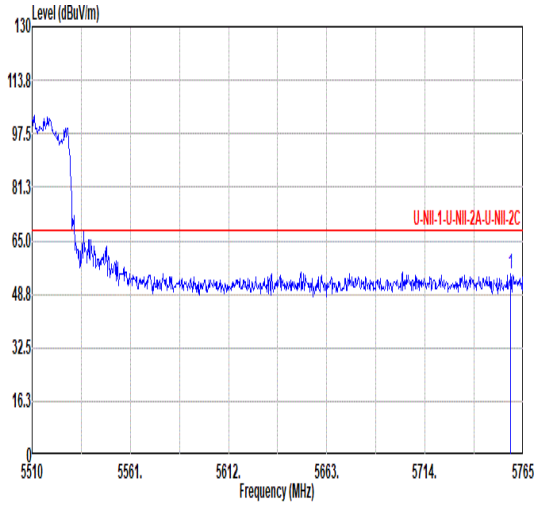 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5758.37 54.81 68.20 -13.39 41.76 34.60 10.37 31.92 0.00 303 46 PEAK	Blank

Mode	35	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full_5510MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	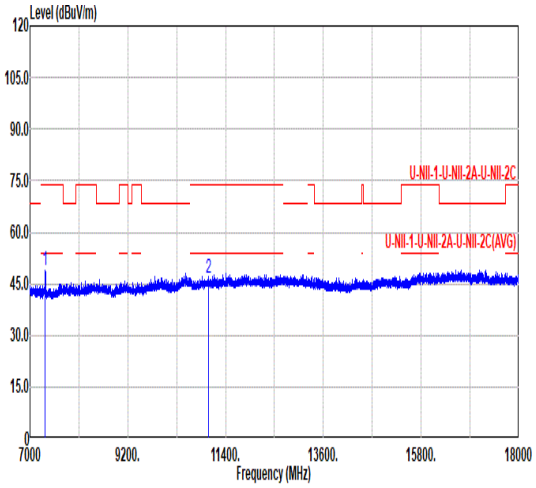 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7346.50 48.79 74.00 -25.21 62.20 35.70 11.70 60.81 0.00 --- --- Peak 2 11020.00 46.51 74.00 -27.49 55.15 38.00 14.58 61.22 0.00 --- --- PEAK	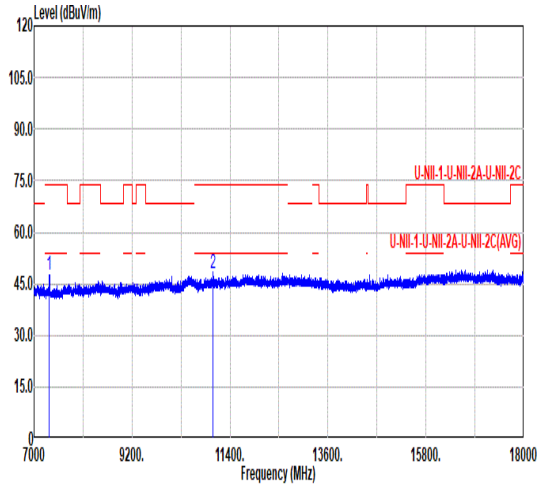 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7346.50 47.67 74.00 -26.33 61.08 35.70 11.70 60.81 0.00 --- --- Peak 2 11020.00 47.85 74.00 -26.15 56.49 38.00 14.58 61.22 0.00 --- --- PEAK

Mode	36	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full_5550MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	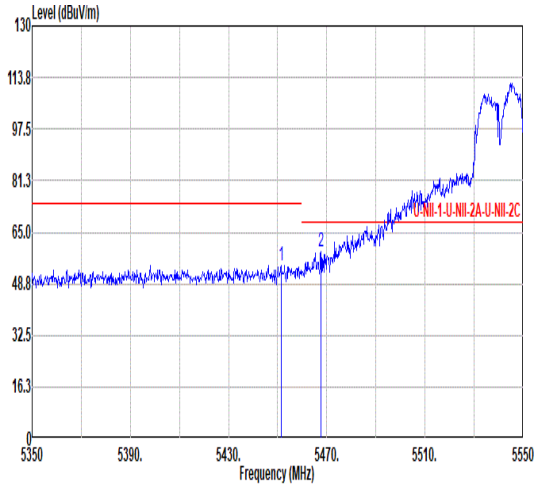 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5451.40 54.59 74.00 -19.41 41.51 34.80 10.01 31.73 0.00 100 267 PEAK 2 5467.60 58.70 68.20 -9.50 45.62 34.76 10.04 31.72 0.00 100 267 PEAK	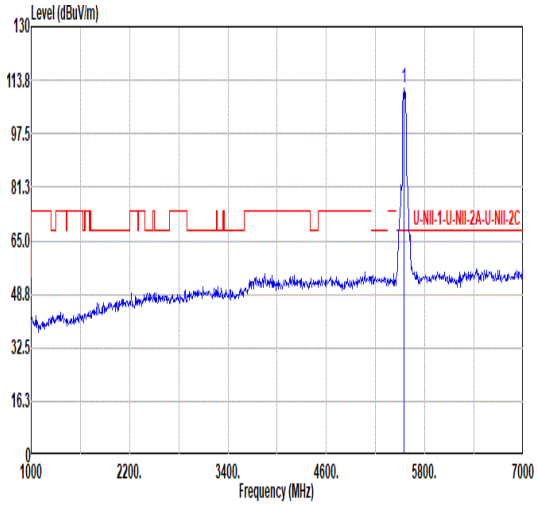 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5550.00 111.29 ------ ------ 98.21 34.60 10.16 31.68 0.00 100 267 PEAK
Avg	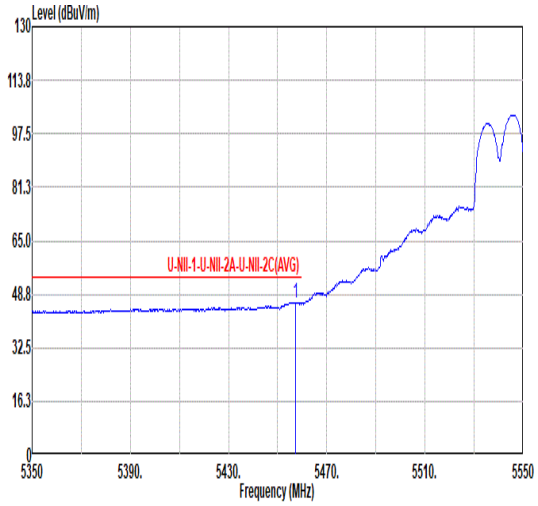 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5457.40 46.32 54.00 -7.68 33.24 34.79 10.02 31.73 0.00 100 267 AVERAGE	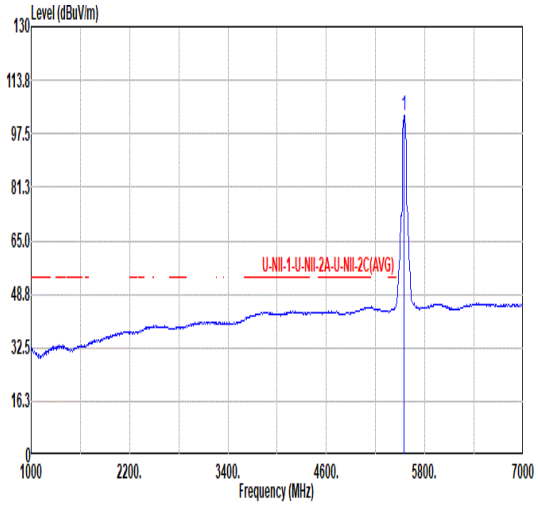 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5550.00 103.20 ------ ------ 90.12 34.60 10.16 31.68 0.00 100 267 AVERAGE

Mode	36	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full_5550MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	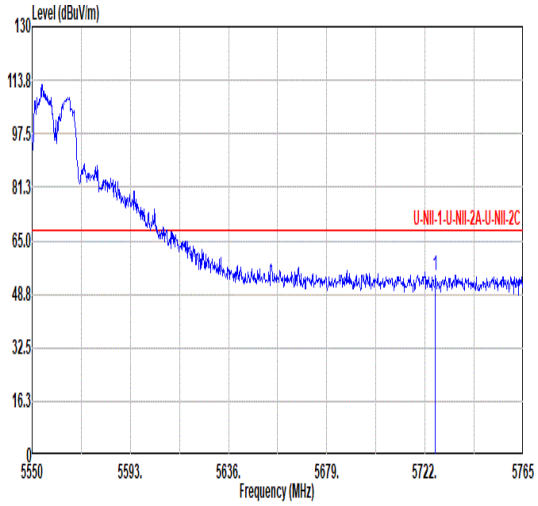 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5726.52 54.65 68.20 -13.55 41.54 34.60 10.35 31.84 0.00 100 267 PEAK	Blank

Mode	36	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full_5550MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	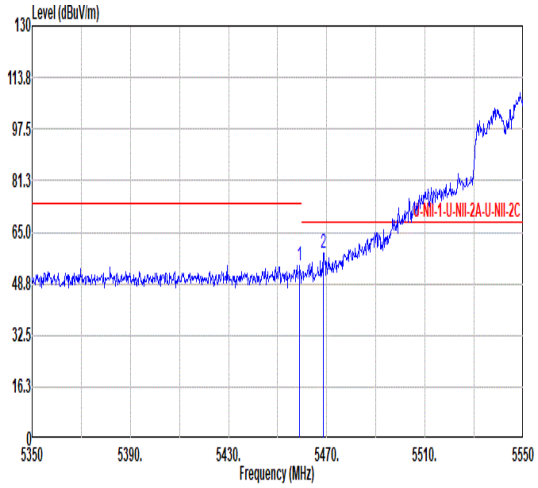 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.00 54.51 74.00 -19.49 41.43 34.78 10.03 31.73 0.00 304 48 PEAK 2 5468.60 58.43 68.20 -9.77 45.35 34.76 10.04 31.72 0.00 304 48 PEAK	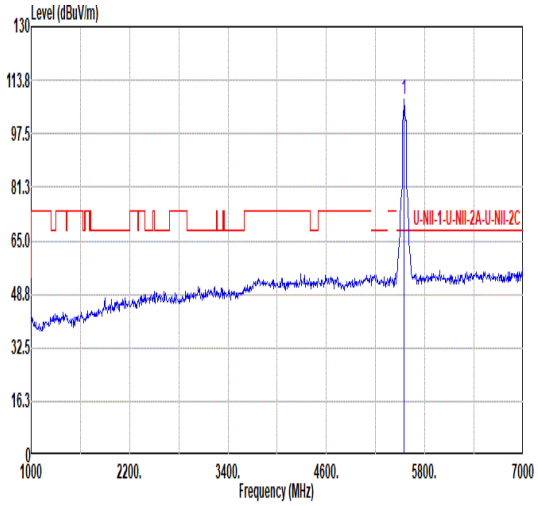 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5550.00 108.16 ------ ------ 95.08 34.60 10.16 31.68 0.00 304 48 PEAK
Avg	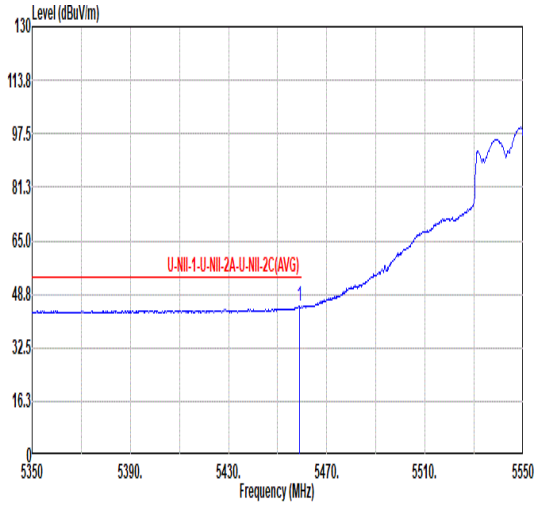 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.80 44.94 54.00 -9.06 31.87 34.78 10.02 31.73 0.00 304 48 AVERAGE	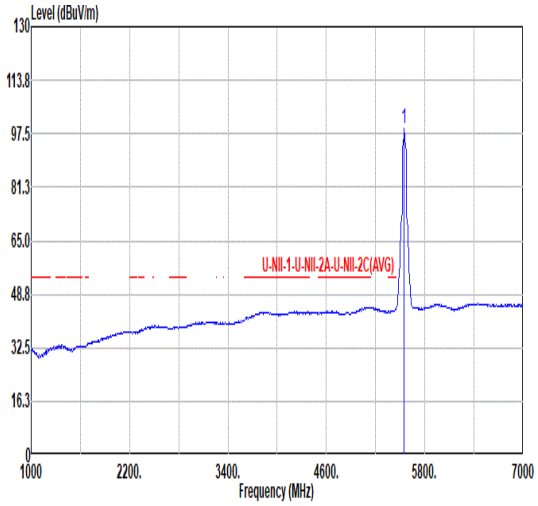 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5550.00 99.26 ------ ------ 86.18 34.60 10.16 31.68 0.00 304 48 AVERAGE

Mode	36	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full_5550MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	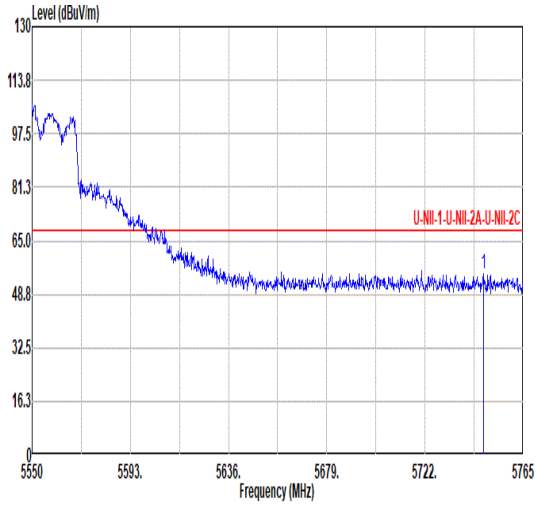 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5747.59 54.93 68.20 -13.27 41.87 34.60 10.36 31.90 0.00 304 48 PEAK	Blank

Mode	36	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full_5550MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	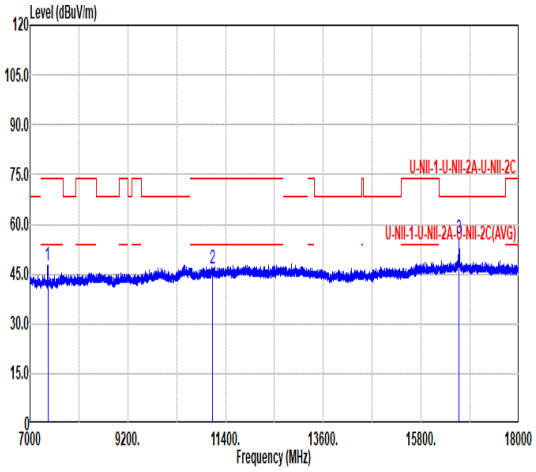 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7400.40 47.73 74.00 -26.27 61.23 35.70 11.73 60.93 0.00 --- --- Peak 2 11100.00 46.81 74.00 -27.19 55.39 38.00 14.63 61.21 0.00 --- --- PEAK 3 16650.00 55.89 68.20 -12.31 59.72 41.35 18.05 63.23 0.00 101 253 PEAK	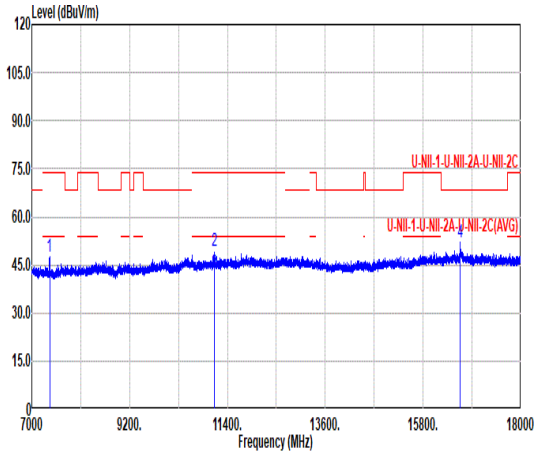 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7400.40 47.76 74.00 -26.24 61.26 35.70 11.73 60.93 0.00 --- --- Peak 2 11100.00 49.40 74.00 -24.60 57.98 38.00 14.63 61.21 0.00 100 0 PEAK 3 11100.00 42.55 54.00 -11.45 51.13 38.00 14.63 61.21 0.00 100 0 AVERAGE 4 16637.10 52.03 68.20 -16.17 55.87 41.36 18.04 63.24 0.00 --- --- Peak

Mode	37	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full_5670MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	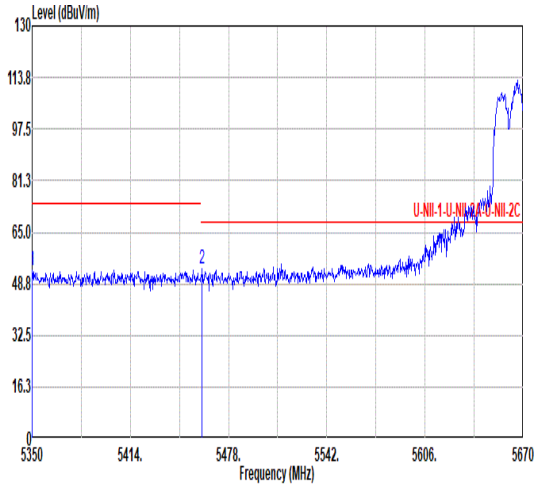 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.00 52.87 74.00 -21.13 40.14 34.60 9.91 31.78 0.00 100 271 PEAK 2 5460.72 53.40 68.20 -14.80 40.32 34.78 10.03 31.73 0.00 100 271 PEAK	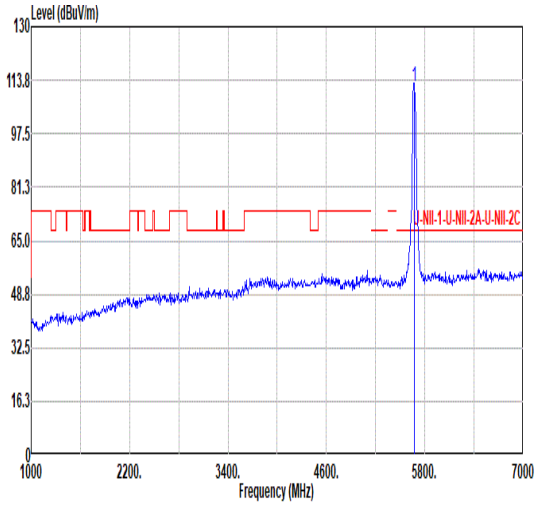 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 111.87 ------ ------ 98.67 34.60 10.30 31.70 0.00 100 271 PEAK
Avg	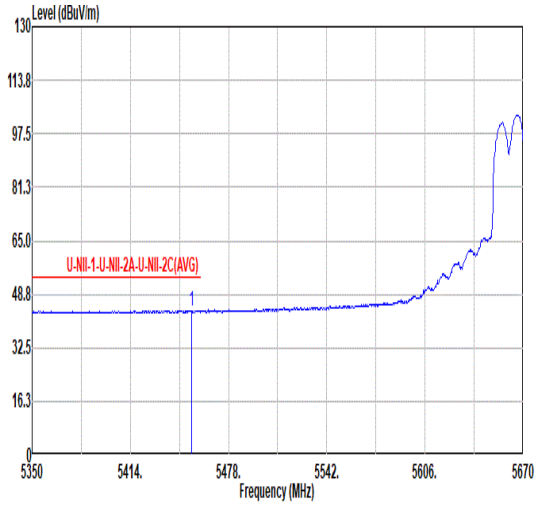 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5454.00 43.78 54.00 -10.22 30.70 34.79 10.02 31.73 0.00 100 271 AVERAGE	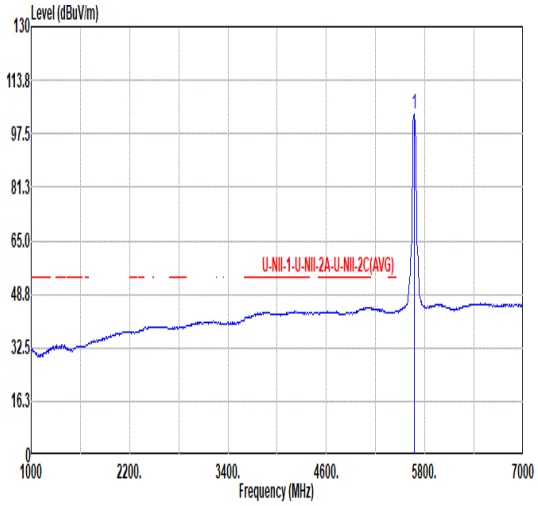 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 103.34 ------ ------ 90.14 34.60 10.30 31.70 0.00 100 271 AVERAGE

Mode	37	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full_5670MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	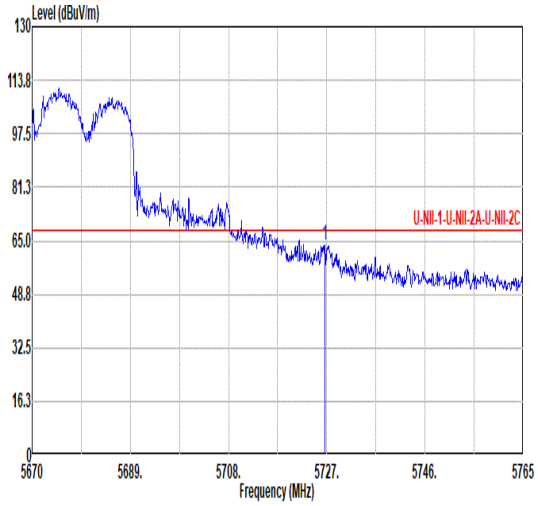 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5726.62 63.87 68.20 -4.33 50.76 34.60 10.35 31.84 0.00 100 271 Peak	Blank

Mode	37	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full_5670MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	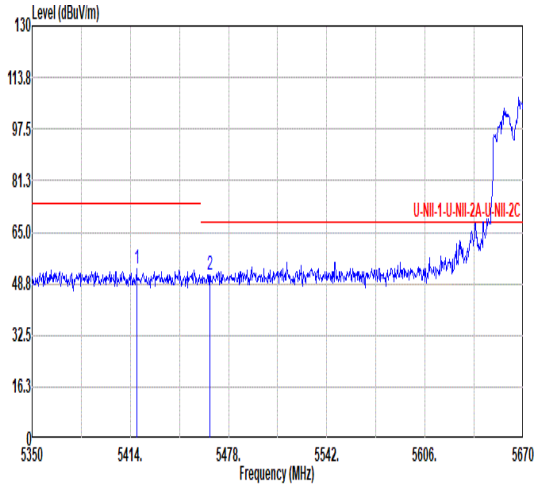 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5418.16 53.29 74.00 -20.71 40.34 34.74 9.96 31.75 0.00 321 49 PEAK 2 5465.84 51.70 68.20 -16.50 38.61 34.77 10.04 31.72 0.00 321 49 PEAK	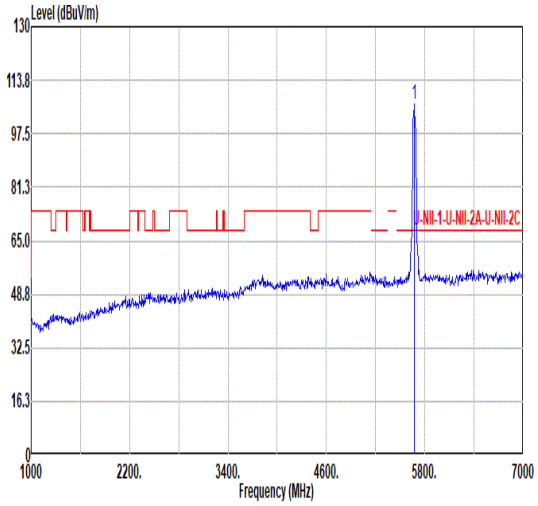 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 106.25 ------ ------ 93.05 34.60 10.30 31.70 0.00 321 49 PEAK
Avg	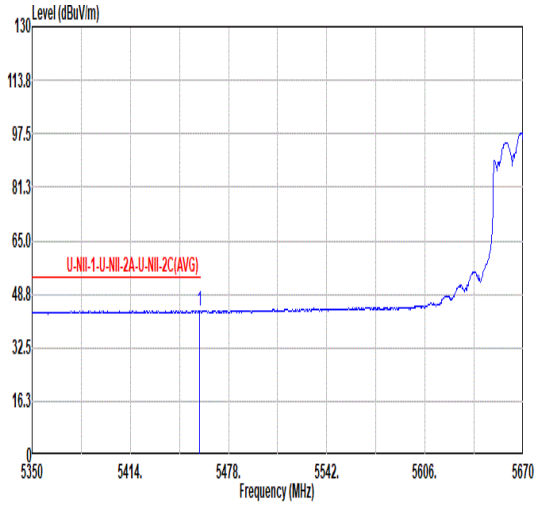 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.12 43.76 54.00 -10.24 30.68 34.78 10.03 31.73 0.00 321 49 AVERAGE	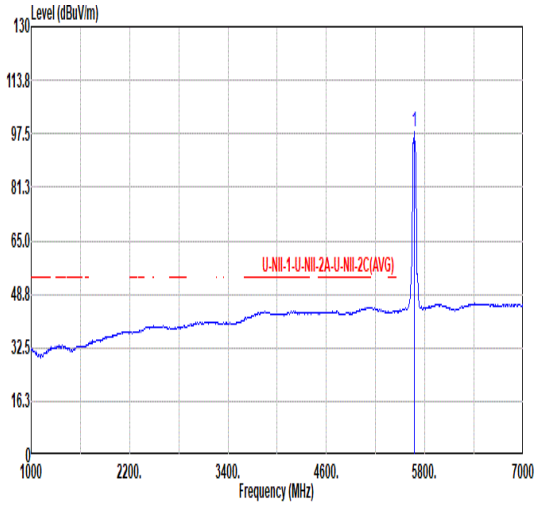 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 97.92 ------ ------ 84.72 34.60 10.30 31.70 0.00 321 49 AVERAGE

Mode	37	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full_5670MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	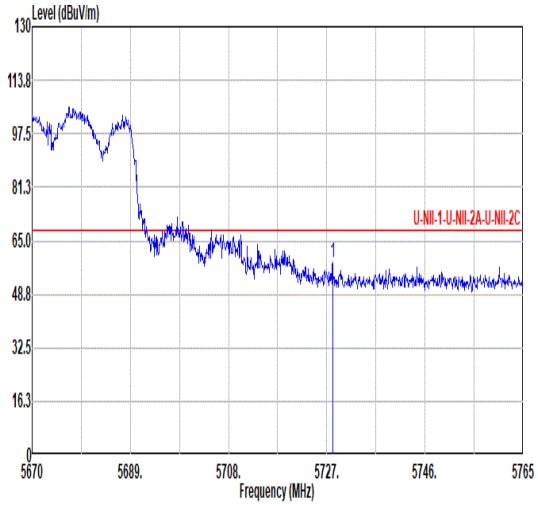 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5728.14 58.16 68.20 -10.04 45.06 34.60 10.35 31.85 0.00 321 49 PEAK	Blank

Mode	37	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full_5670MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	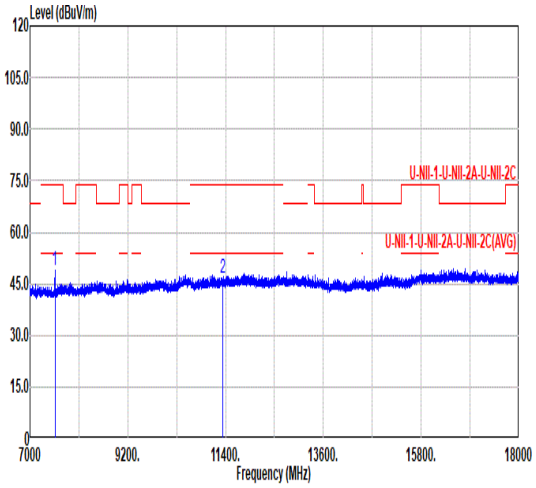 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7559.90 48.84 74.00 -25.16 62.26 35.70 11.91 61.03 0.00 --- --- Peak 2 11340.00 46.66 74.00 -27.34 55.01 38.04 14.80 61.19 0.00 --- --- PEAK	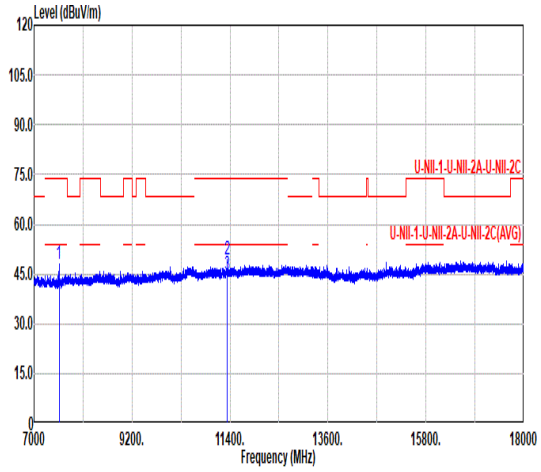 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7559.90 47.93 74.00 -26.07 61.35 35.70 11.91 61.03 0.00 --- --- Peak 2 11340.00 49.28 74.00 -24.72 57.63 38.04 14.80 61.19 0.00 100 45 PEAK 3 11340.00 44.73 54.00 -9.27 53.08 38.04 14.80 61.19 0.00 100 45 AVERAGE

Mode	38	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	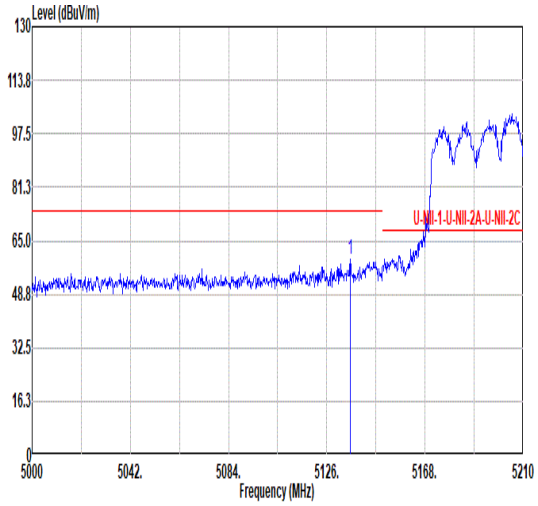 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5136.08 59.38 74.00 -14.62 47.34 34.17 9.77 31.90 0.00 112 302 PEAK	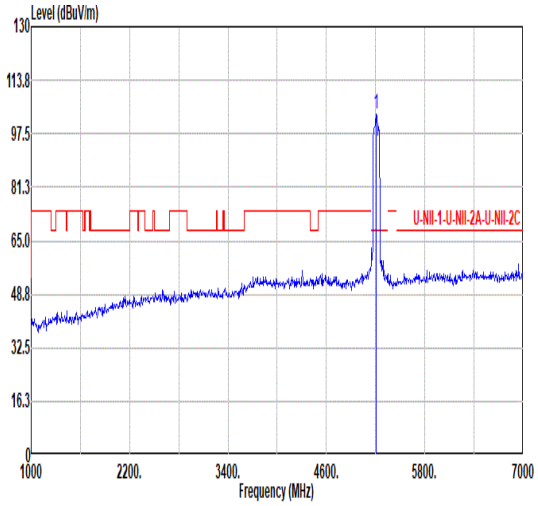 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 103.58 ------ ------ 91.40 34.21 9.83 31.86 0.00 112 302 PEAK
Avg	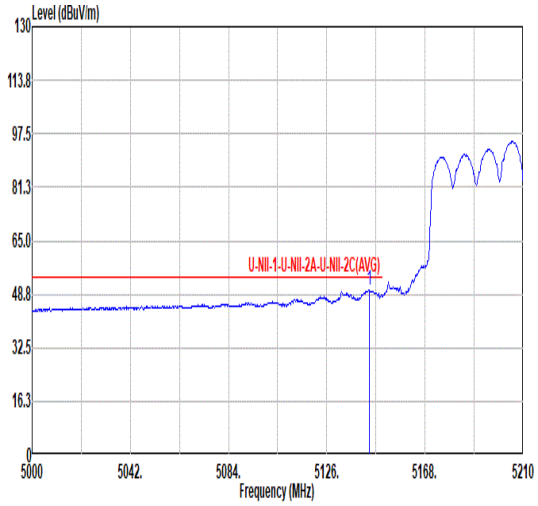 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5144.06 49.97 54.00 -4.03 37.89 34.19 9.78 31.89 0.00 112 302 AVERAGE	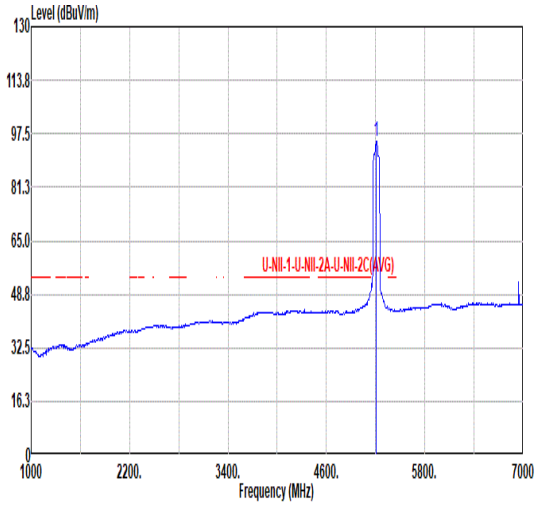 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 95.39 ------ ------ 83.21 34.21 9.83 31.86 0.00 112 302 AVERAGE

Mode	38	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	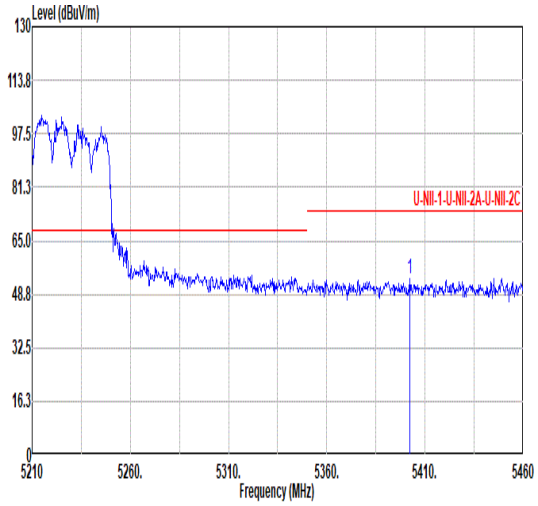 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5402.25 53.42 74.00 -20.58 40.54 34.70 9.94 31.76 0.00 112 302 PEAK	Blank
Avg	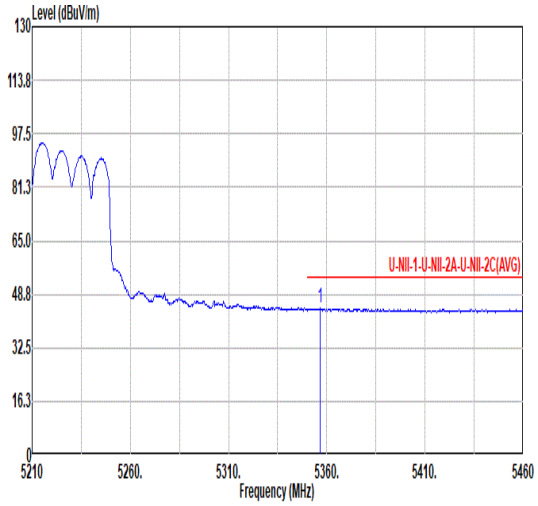 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5356.75 44.40 54.00 -9.60 31.65 34.61 9.92 31.78 0.00 112 302 AVERAGE	Blank

Mode	38	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	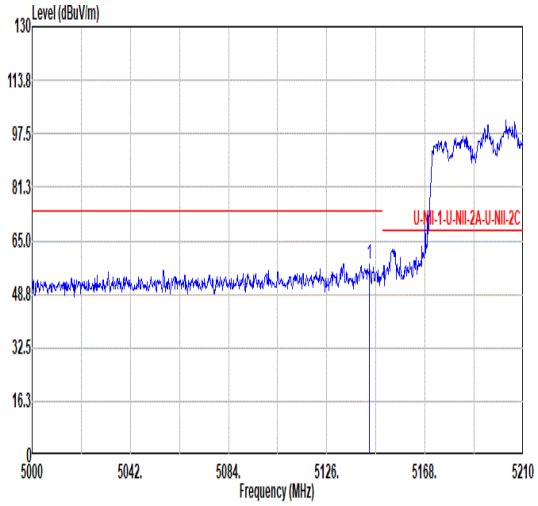 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5144.27 58.04 74.00 -15.96 45.96 34.19 9.78 31.89 0.00 344 60 PEAK	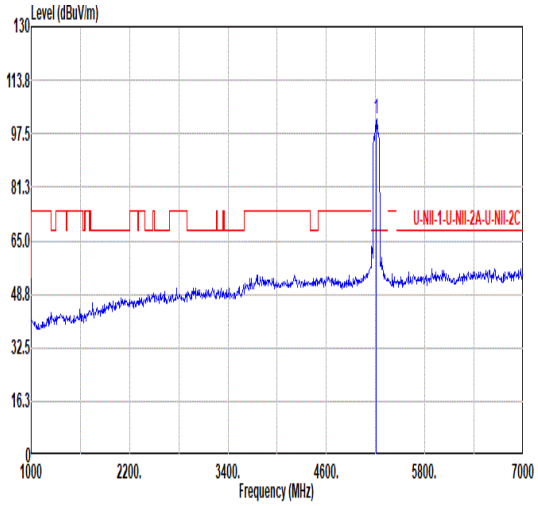 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 102.28 ------ ------ 90.08 34.22 9.84 31.86 0.00 344 60 PEAK
Avg	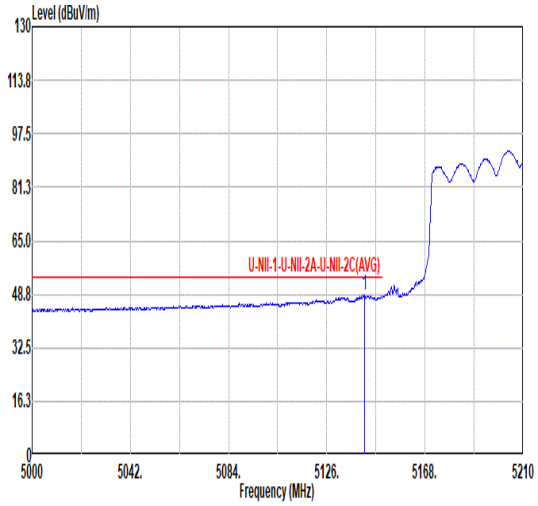 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5142.17 48.52 54.00 -5.48 36.45 34.18 9.78 31.89 0.00 344 60 AVERAGE	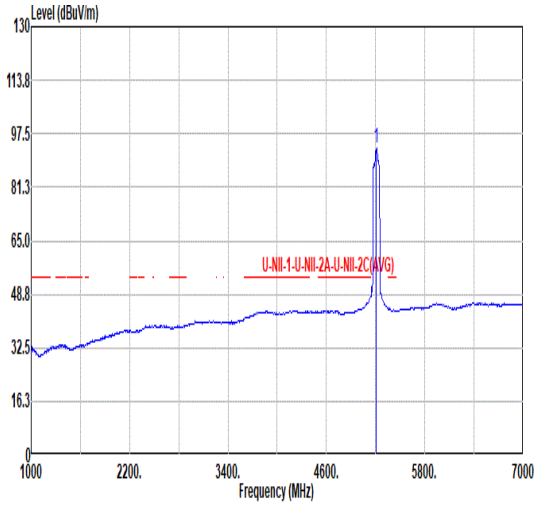 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 93.30 ------ ------ 81.10 34.22 9.84 31.86 0.00 344 60 AVERAGE

Mode	38	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	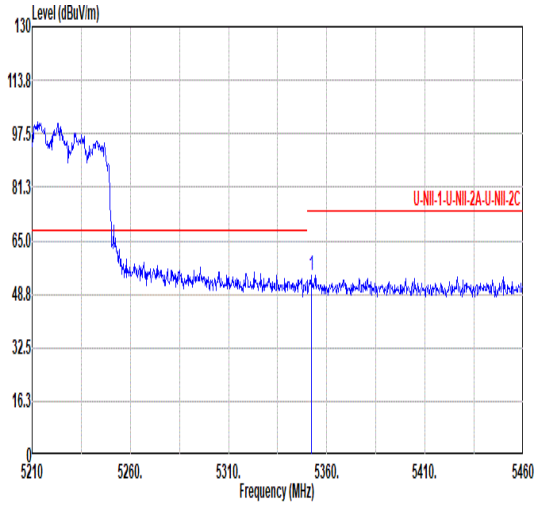 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.00 54.57 74.00 -19.43 41.84 34.60 9.91 31.78 0.00 344 60 PEAK	Blank
Avg	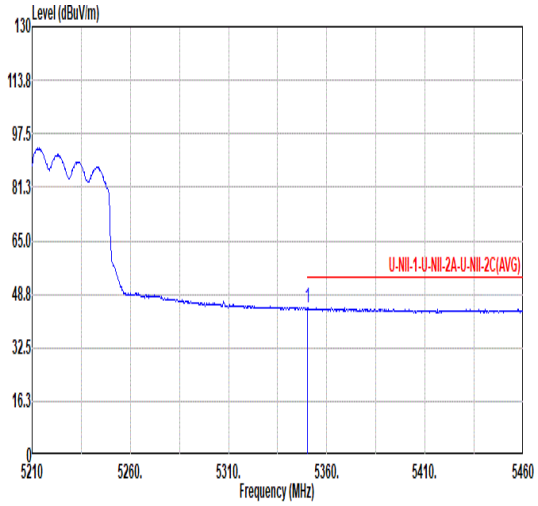 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.00 44.72 54.00 -9.28 31.99 34.60 9.91 31.78 0.00 344 60 AVERAGE	Blank

Mode	38	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	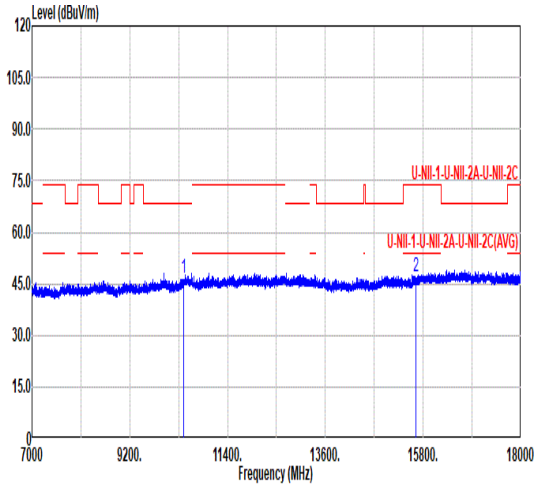 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10420.00 46.44 68.20 -21.76 56.00 37.54 14.17 61.27 0.00 --- --- PEAK 2 15630.00 47.16 74.00 -26.84 53.14 40.26 17.56 63.80 0.00 --- --- PEAK	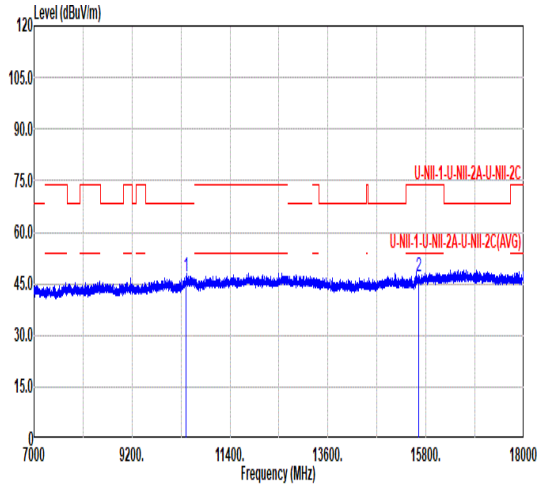 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10420.00 47.07 68.20 -21.13 56.63 37.54 14.17 61.27 0.00 --- --- PEAK 2 15630.00 47.12 74.00 -26.88 53.10 40.26 17.56 63.80 0.00 --- --- PEAK

Mode	39	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	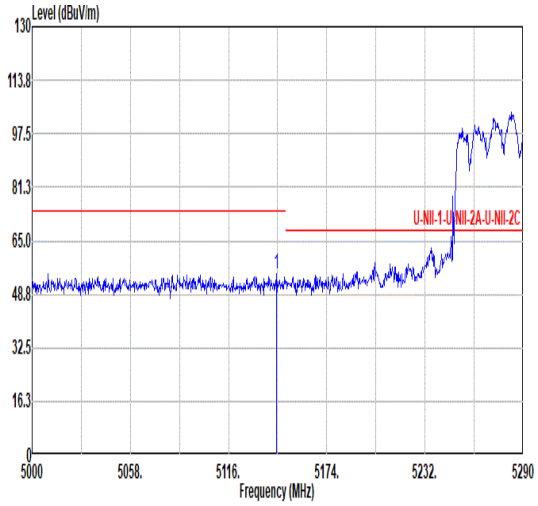 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5144.13 54.85 74.00 -19.15 42.77 34.19 9.78 31.89 0.00 100 268 PEAK	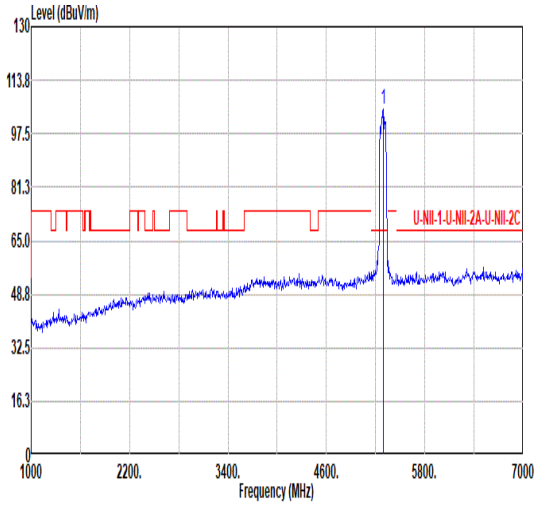 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 104.76 ------ ------ 92.24 34.46 9.88 31.82 0.00 100 268 PEAK
Avg	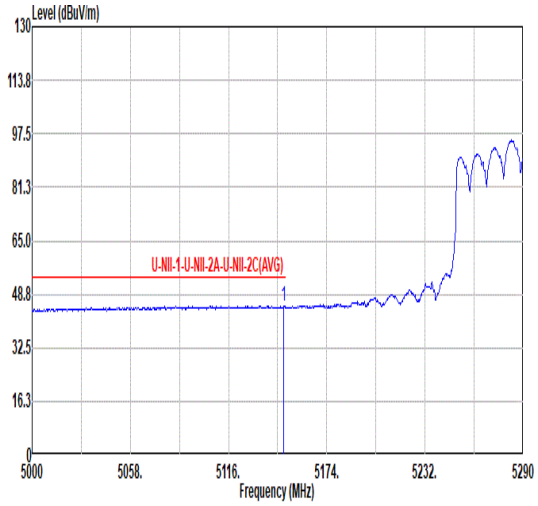 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.48 45.37 54.00 -8.63 33.27 34.20 9.79 31.89 0.00 100 268 AVERAGE	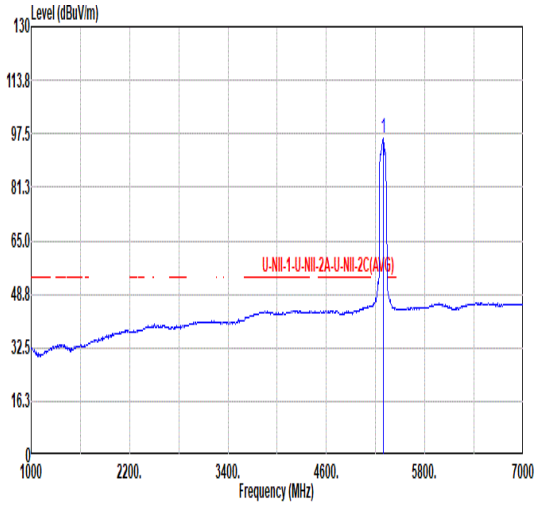 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 96.15 ------ ------ 83.63 34.46 9.88 31.82 0.00 100 268 AVERAGE

Mode	39	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	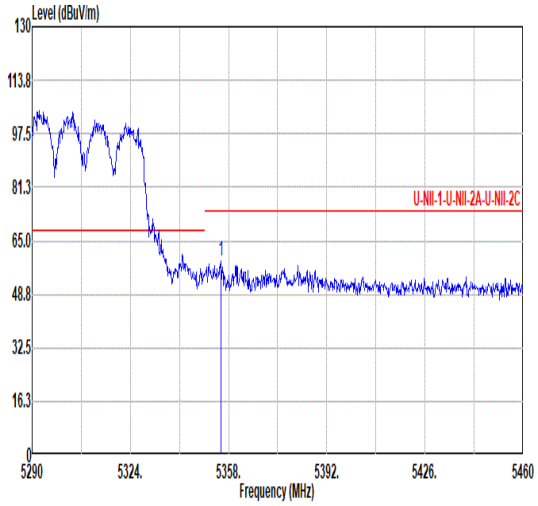 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5355.45 59.05 74.00 -14.95 46.31 34.61 9.91 31.78 0.00 100 268 PEAK	Blank
Avg	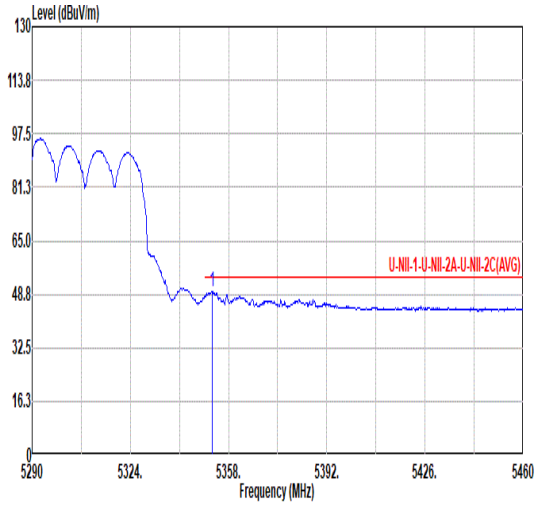 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.39 49.71 54.00 -4.29 36.98 34.60 9.91 31.78 0.00 100 268 AVERAGE	Blank

Mode	39	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	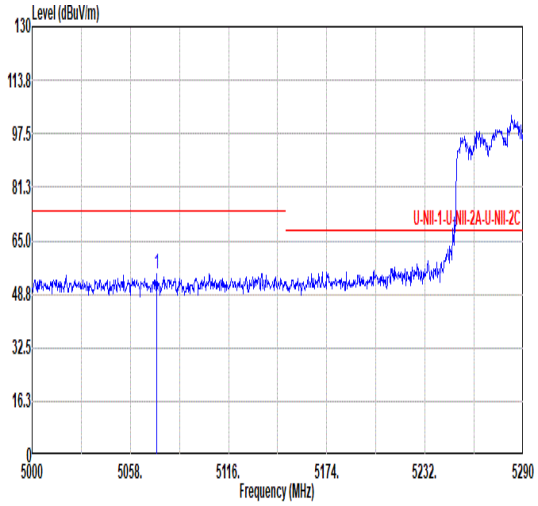 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5073.37 55.04 74.00 -18.96 43.20 34.05 9.72 31.93 0.00 354 60 PEAK	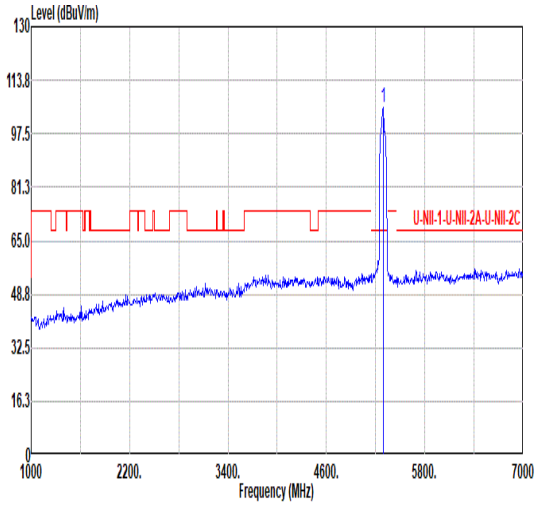 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 105.61 ------ ------ 93.06 34.48 9.88 31.81 0.00 354 60 PEAK
Avg	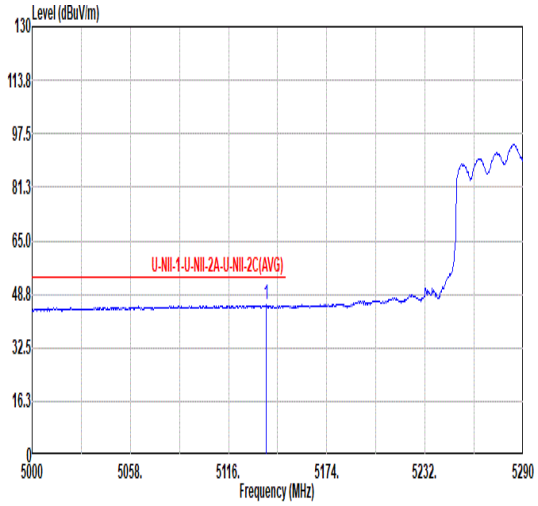 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5138.33 45.50 54.00 -8.50 33.44 34.18 9.78 31.90 0.00 354 60 AVERAGE	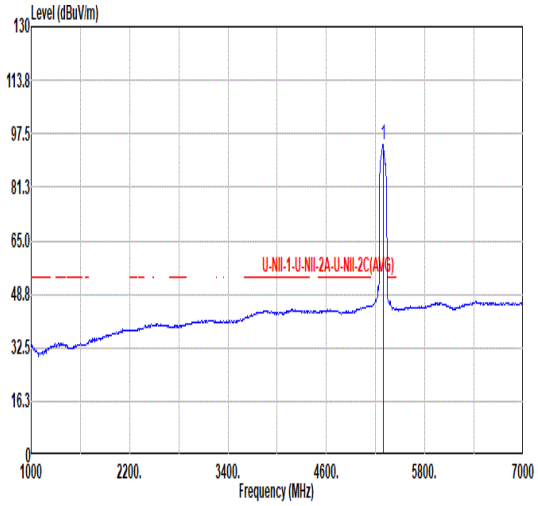 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 94.14 ------ ------ 81.64 34.44 9.88 31.82 0.00 354 60 AVERAGE

Mode	39	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	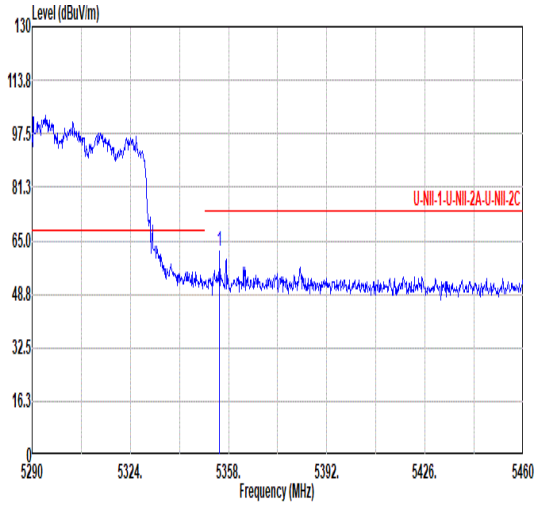 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5354.94 61.90 74.00 -12.10 49.16 34.61 9.91 31.78 0.00 354 60 PEAK	Blank
Avg	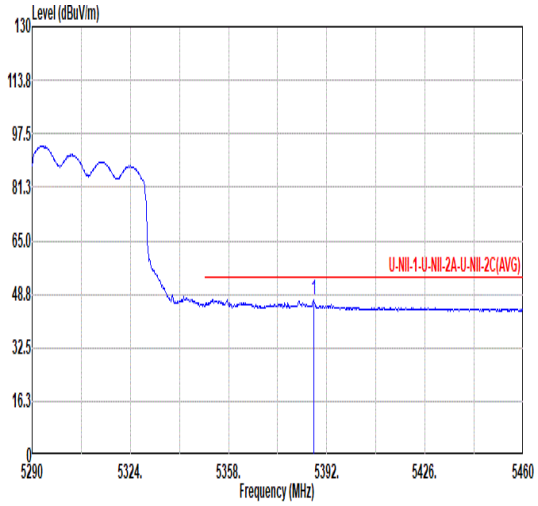 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5387.41 47.30 54.00 -6.70 34.46 34.67 9.93 31.76 0.00 354 60 AVERAGE	Blank

Mode	39	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	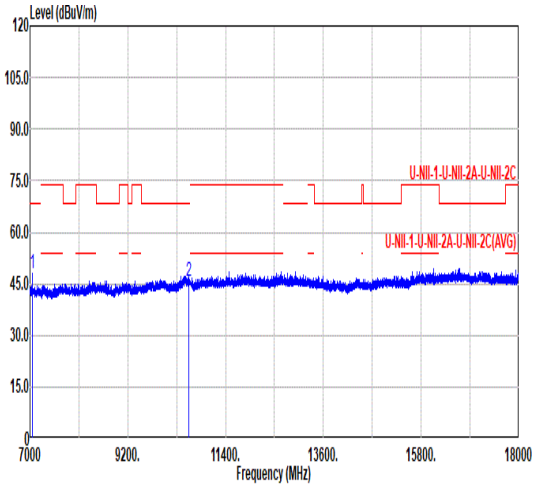 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7053.90 48.21 68.20 -19.99 61.23 35.60 11.53 60.15 0.00 --- --- Peak 2 10580.00 45.95 68.20 -22.25 55.07 37.86 14.28 61.26 0.00 --- --- PEAK	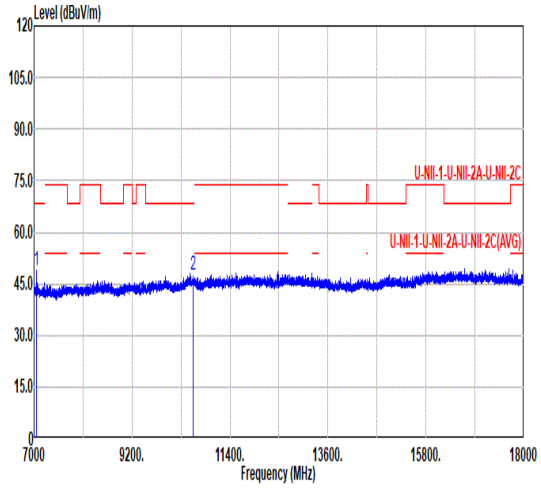 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7052.80 48.72 68.20 -19.48 61.74 35.60 11.53 60.15 0.00 --- --- Peak 2 10580.00 47.65 68.20 -20.55 56.77 37.86 14.28 61.26 0.00 --- --- PEAK

Mode	40	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full_5530MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	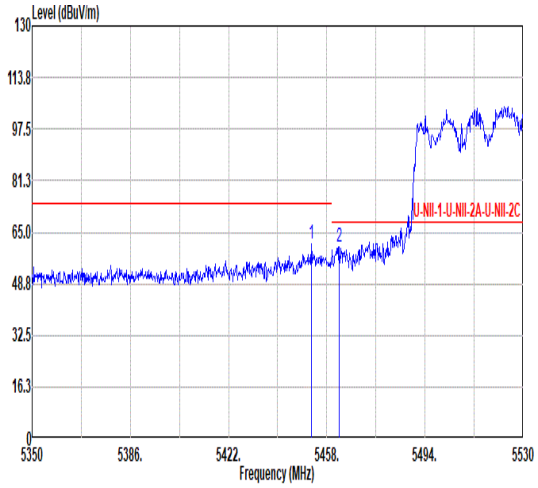 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5452.24 61.53 74.00 -12.47 48.45 34.80 10.01 31.73 0.00 100 244 PEAK 2 5462.68 60.53 68.20 -7.67 47.45 34.77 10.03 31.72 0.00 100 244 PEAK	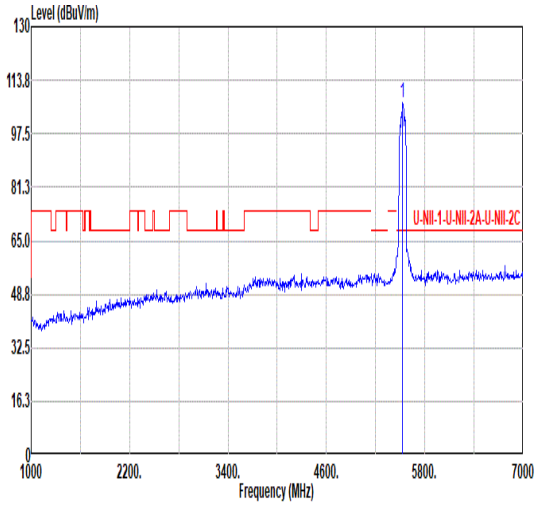 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 106.76 ------ ------ 93.68 34.64 10.13 31.69 0.00 100 244 PEAK
Avg	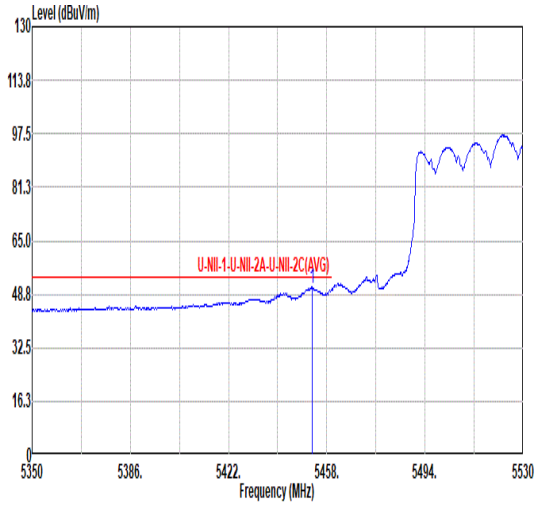 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5452.60 50.70 54.00 -3.30 37.62 34.79 10.02 31.73 0.00 100 244 AVERAGE	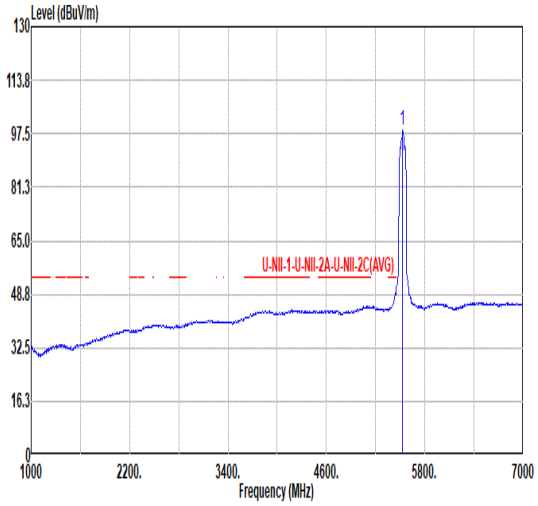 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 98.46 ------ ------ 85.38 34.64 10.13 31.69 0.00 100 244 AVERAGE

Mode	40	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full_5530MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	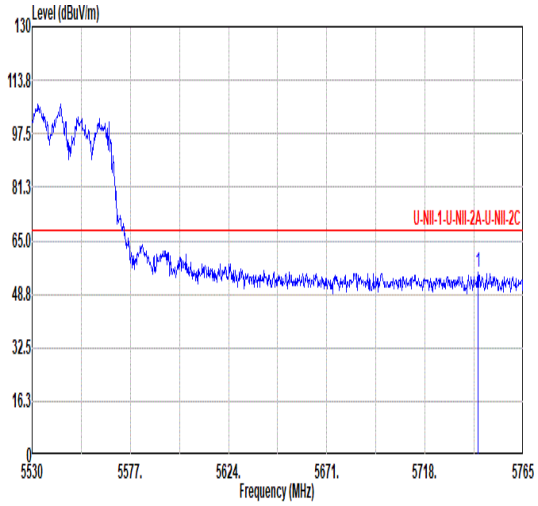 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5743.38 55.54 68.20 -12.66 42.47 34.60 10.36 31.89 0.00 100 244 PEAK	Blank

Mode	40	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full_5530MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	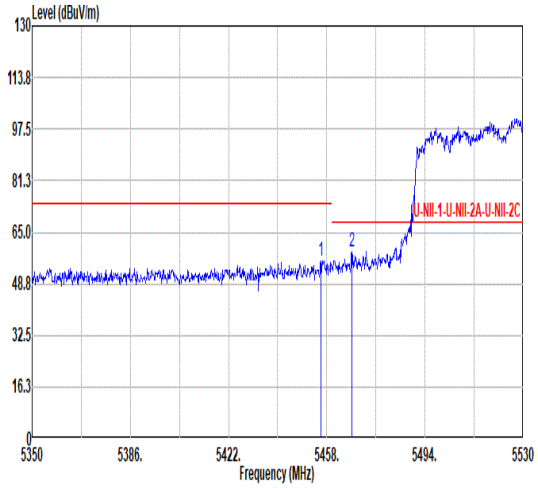 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5455.84 55.91 74.00 -18.09 42.83 34.79 10.02 31.73 0.00 323 59 PEAK 2 5467.18 58.72 68.20 -9.48 45.63 34.77 10.04 31.72 0.00 323 59 PEAK	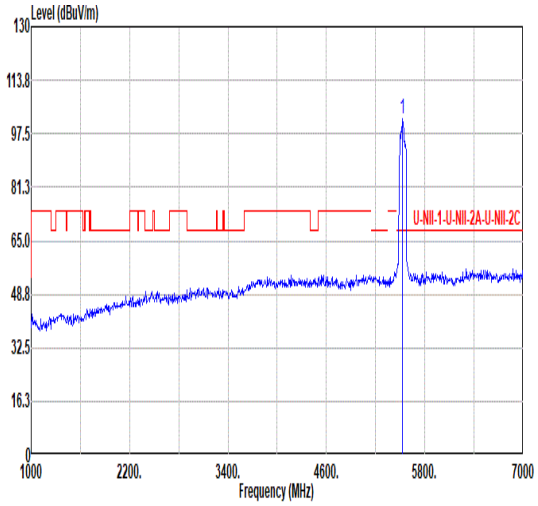 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 102.23 ------ ------ 89.15 34.64 10.13 31.69 0.00 323 59 PEAK
Avg	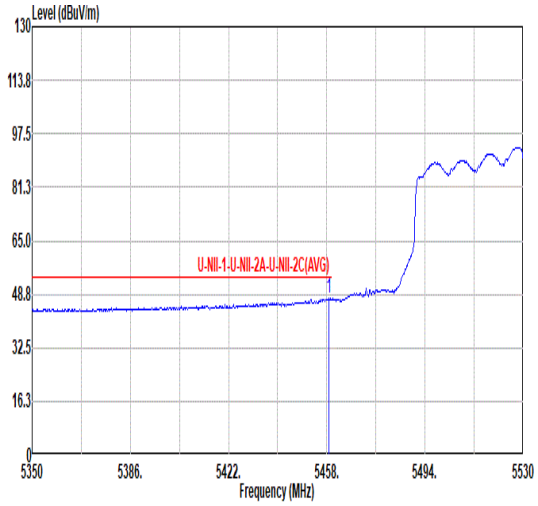 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.72 47.42 54.00 -6.58 34.35 34.78 10.02 31.73 0.00 323 59 AVERAGE	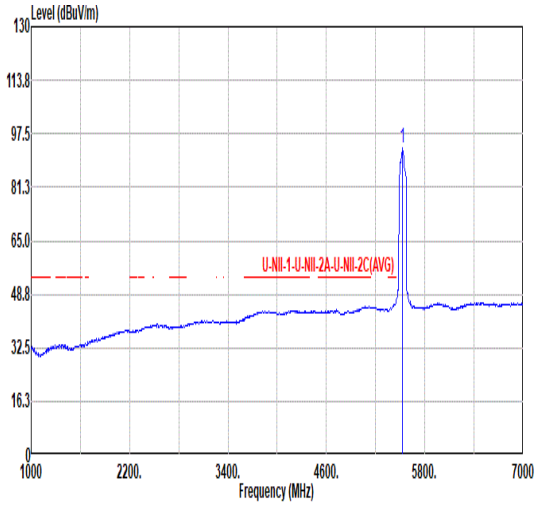 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 93.35 ------ ------ 80.27 34.64 10.13 31.69 0.00 323 59 AVERAGE

Mode	40	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full_5530MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	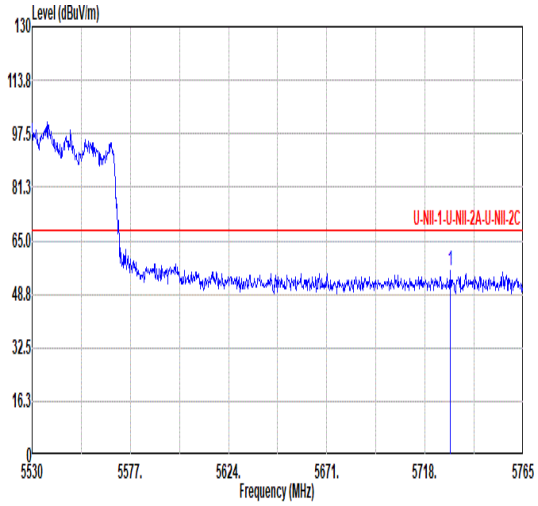 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5729.99 55.75 68.20 -12.45 42.65 34.60 10.35 31.85 0.00 323 59 PEAK	Blank

Mode	40	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full_5530MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	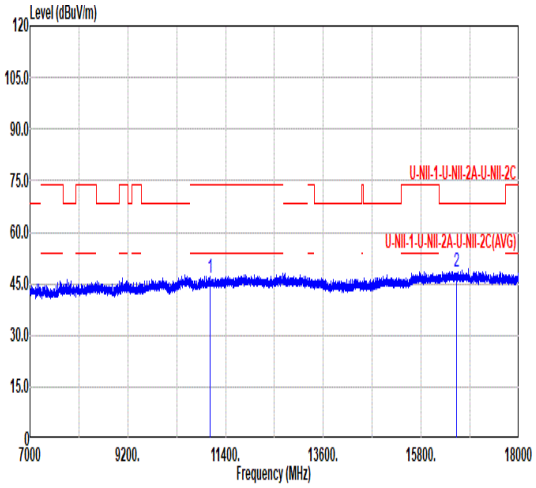 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11060.00 46.76 74.00 -27.24 55.37 38.00 14.61 61.22 0.00 --- --- PEAK 2 16590.00 48.23 68.20 -19.97 52.19 41.35 18.01 63.32 0.00 --- --- PEAK	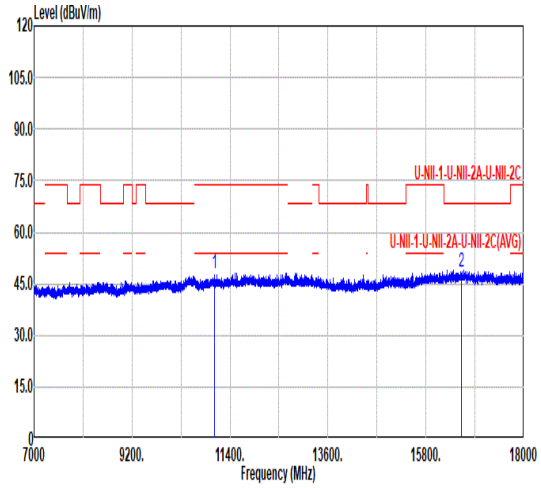 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11060.00 48.17 74.00 -25.83 56.78 38.00 14.61 61.22 0.00 --- --- PEAK 2 16590.00 48.48 68.20 -19.72 52.33 41.40 18.03 63.28 0.00 --- --- PEAK

Mode	41	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full_5610MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	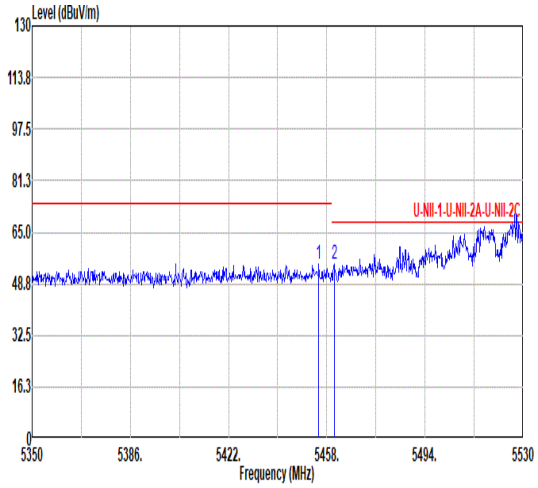 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5455.12 55.05 74.00 -18.95 41.97 34.79 10.02 31.73 0.00 100 271 PEAK 2 5460.70 54.73 68.20 -13.47 41.65 34.78 10.03 31.73 0.00 100 271 PEAK	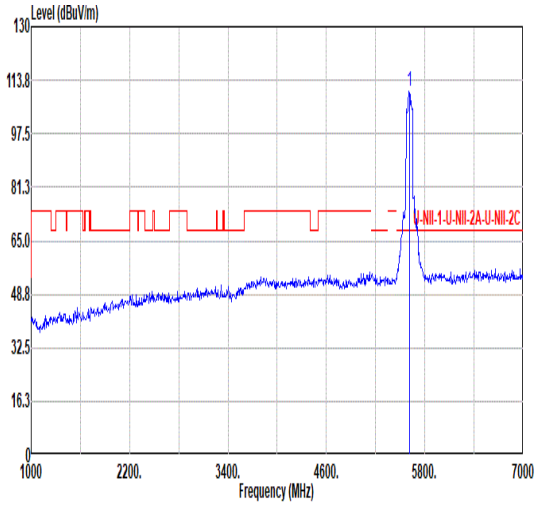 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 110.47 ------ ------ 97.28 34.60 10.24 31.65 0.00 100 271 PEAK
Avg	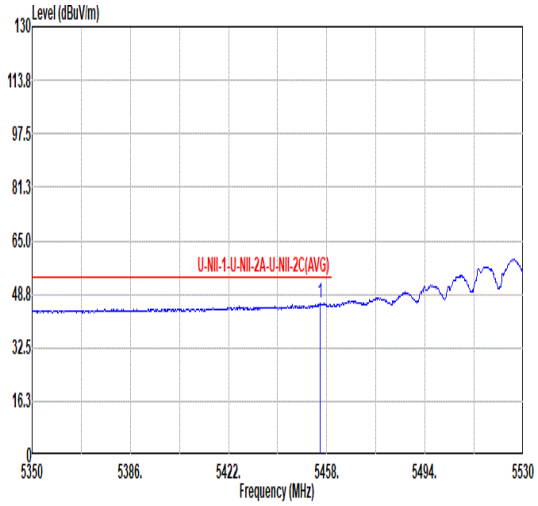 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5455.48 45.91 54.00 -8.09 32.83 34.79 10.02 31.73 0.00 100 271 AVERAGE	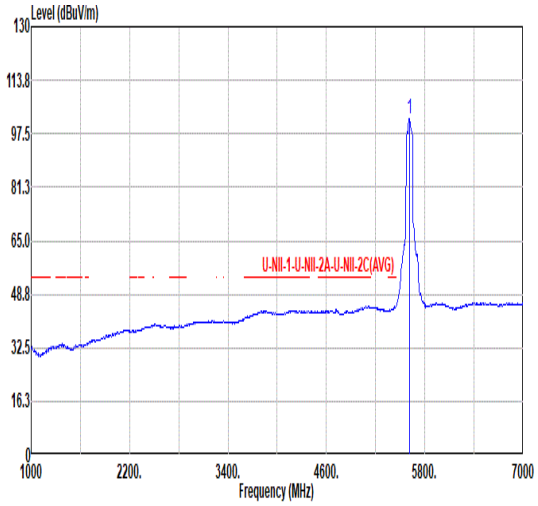 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 102.22 ------ ------ 89.02 34.60 10.25 31.65 0.00 100 271 AVERAGE

Mode	41	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full_5610MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	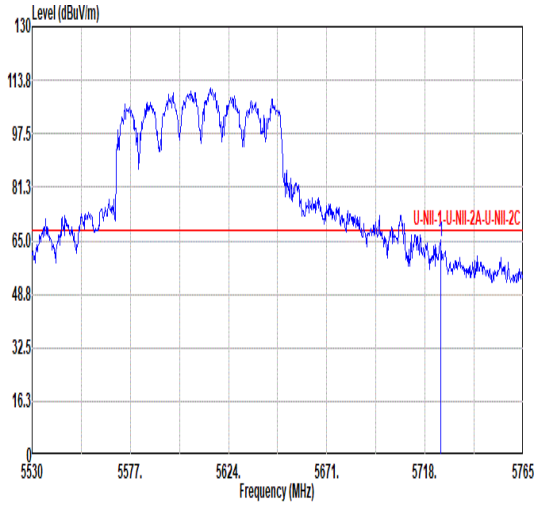 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5725.52 64.60 68.20 -3.60 51.49 34.60 10.35 31.84 0.00 100 271 PEAK	Blank

Mode	41	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full_5610MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	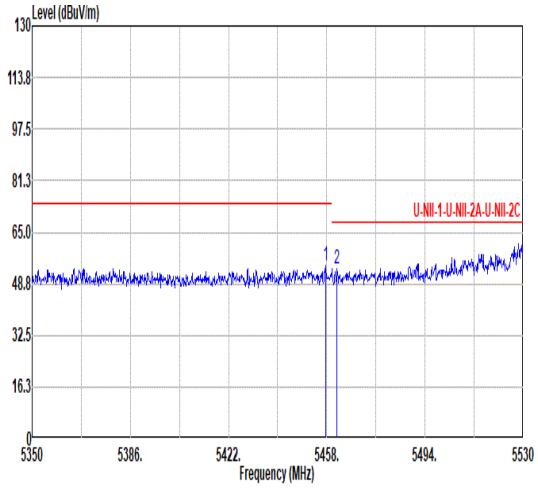 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5457.64 54.42 74.00 -19.58 41.35 34.78 10.02 31.73 0.00 348 47 PEAK 2 5461.78 53.33 68.20 -14.87 40.24 34.78 10.03 31.72 0.00 348 47 PEAK	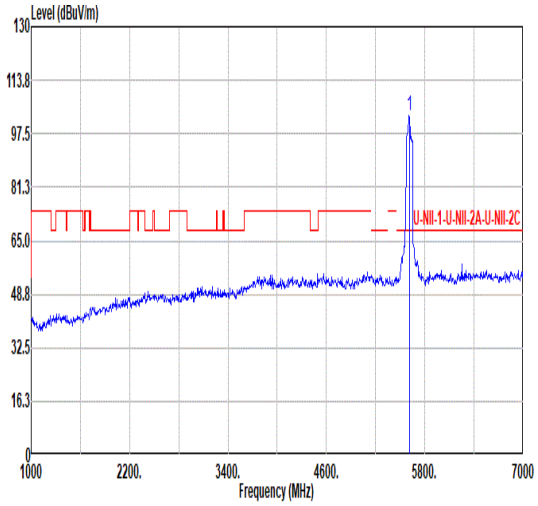 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 103.06 ------ ------ 89.86 34.60 10.25 31.65 0.00 348 47 PEAK
Avg	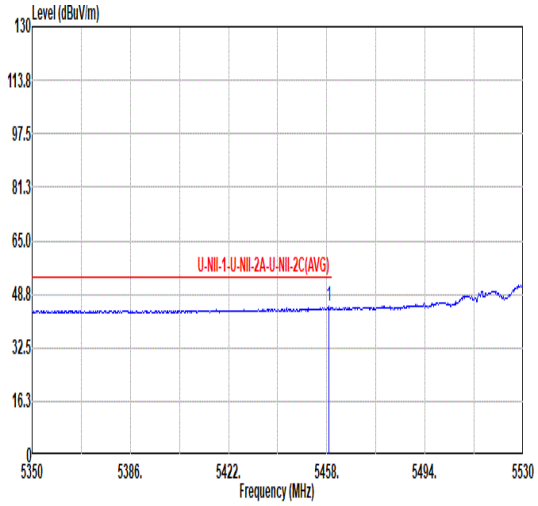 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.72 45.22 54.00 -8.78 32.15 34.78 10.02 31.73 0.00 348 47 AVERAGE	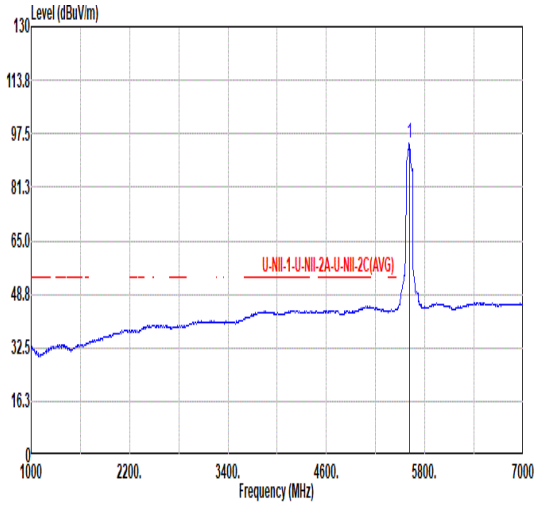 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 94.83 ------ ------ 81.63 34.60 10.25 31.65 0.00 348 47 AVERAGE

Mode	41	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full_5610MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	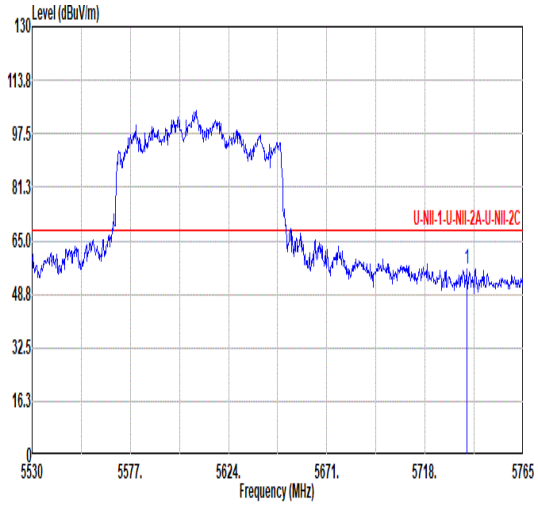 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5737.98 56.33 68.20 -11.87 43.24 34.60 10.36 31.87 0.00 348 47 PEAK	Blank

Mode	41	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full_5610MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	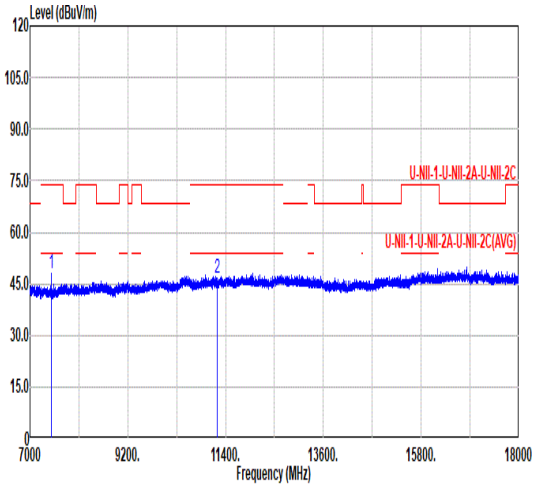 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7480.70 48.09 74.00 -25.91 61.68 35.70 11.82 61.11 0.00 --- --- Peak 2 11220.00 46.70 74.00 -27.30 55.18 38.00 14.72 61.20 0.00 --- --- PEAK	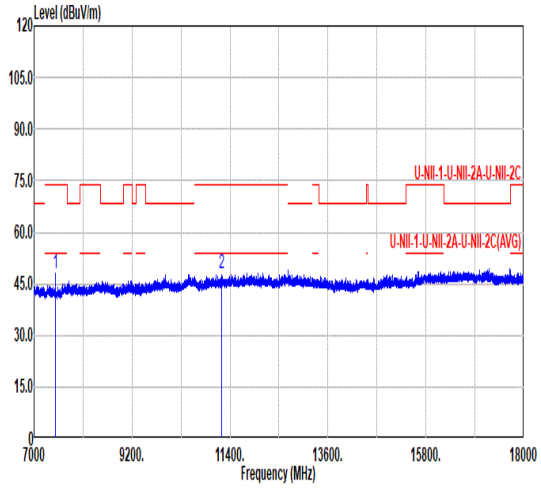 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7480.70 48.04 74.00 -25.96 61.63 35.70 11.82 61.11 0.00 --- --- Peak 2 11220.00 48.07 74.00 -25.93 56.55 38.00 14.72 61.20 0.00 --- --- PEAK

Mode	42	
	Band Edge - L	
	U-NII-2A_5.15-5.35_802.11ax HE160_CH50_Full_5250MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	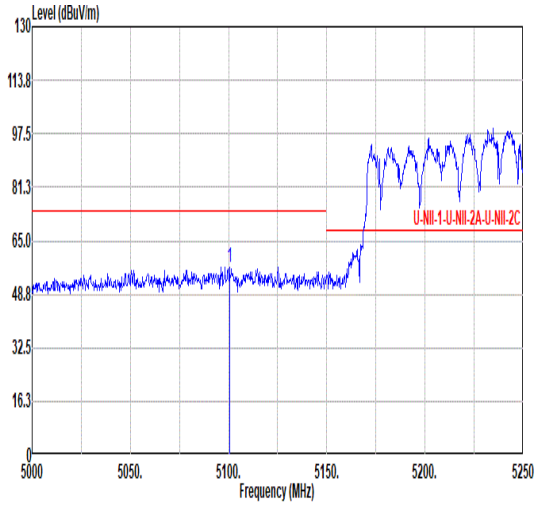 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5100.50 56.99 74.00 -17.01 45.07 34.10 9.74 31.92 0.00 100 267 PEAK	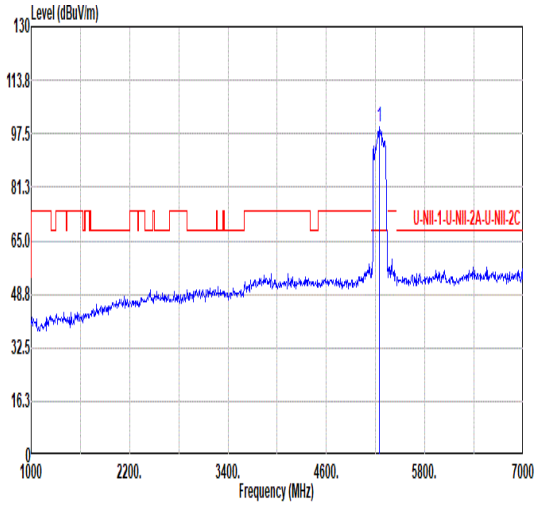 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5250.00 99.36 ------ ------ 87.07 34.28 9.85 31.84 0.00 100 267 PEAK
Avg	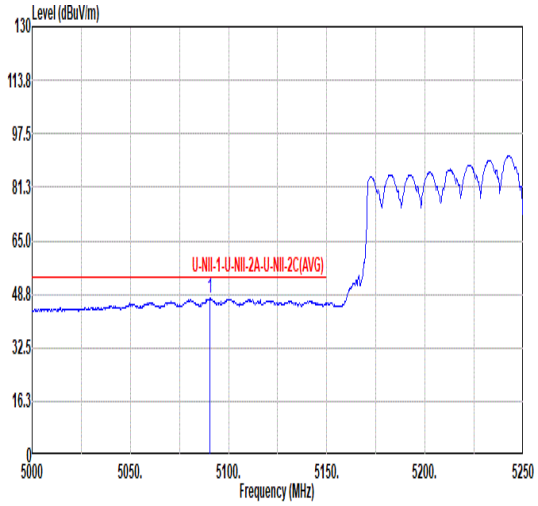 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5090.50 47.36 54.00 -6.64 35.47 34.08 9.73 31.92 0.00 100 267 AVERAGE	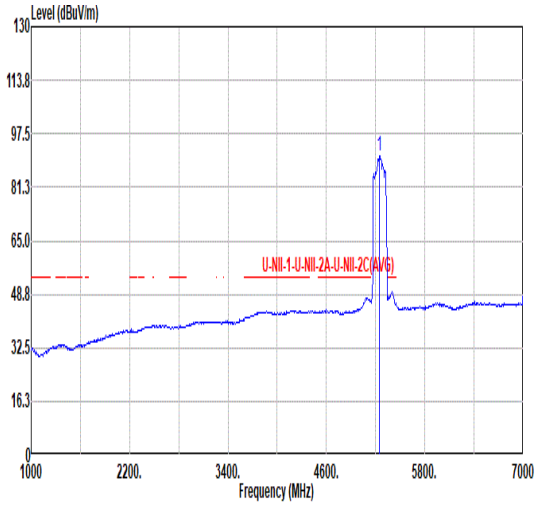 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5250.00 90.89 ------ ------ 78.54 34.32 9.86 31.83 0.00 100 267 AVERAGE

Mode	42	
	Band Edge - R	
	U-NII-2A_5.15-5.35_802.11ax HE160_CH50_Full_5250MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	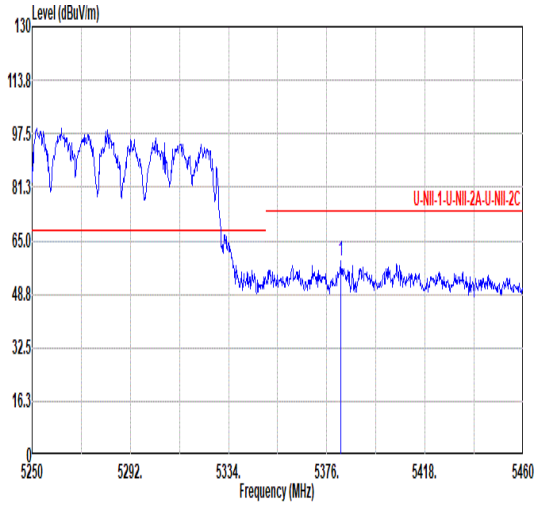 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5381.88 58.68 74.00 -15.32 45.86 34.66 9.93 31.77 0.00 100 267 PEAK	Blank
Avg	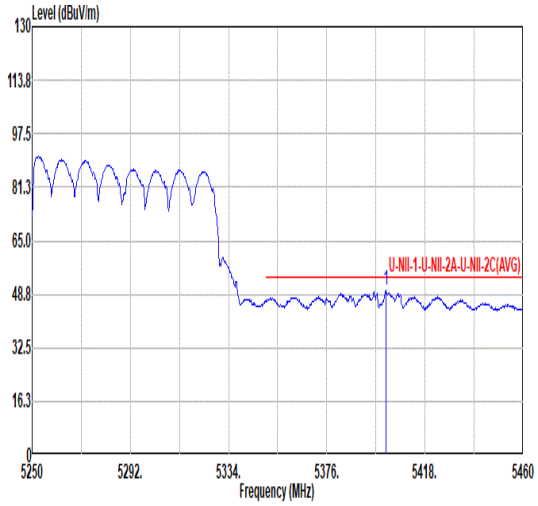 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5401.20 49.98 54.00 -4.02 37.10 34.70 9.94 31.76 0.00 100 267 AVERAGE	Blank

Mode	42	
	Band Edge - L	
	U-NII-2A_5.15-5.35_802.11ax HE160_CH50_Full_5250MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	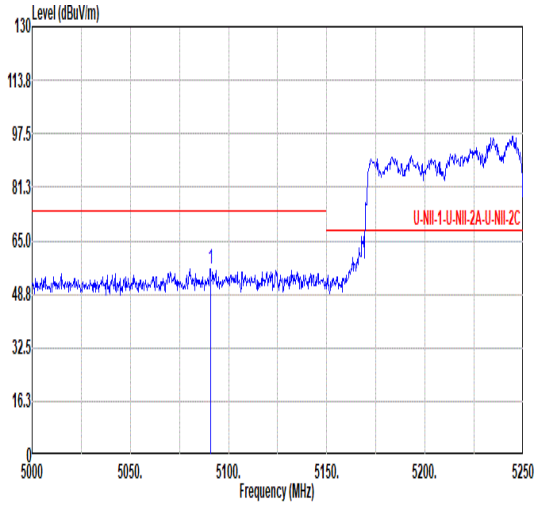 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5090.75 56.51 74.00 -17.49 44.62 34.08 9.73 31.92 0.00 357 62 PEAK	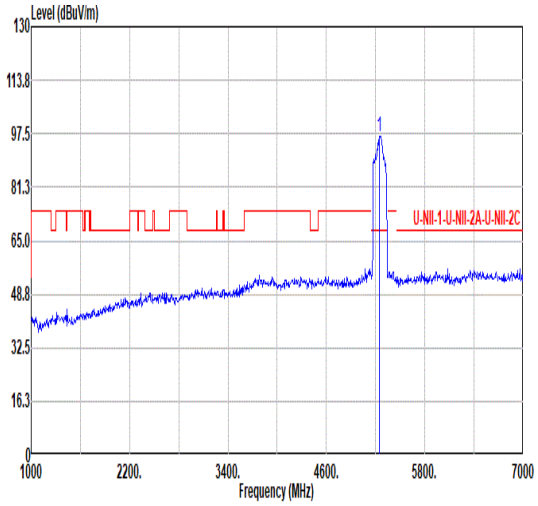 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5250.00 96.54 ------ ------ 84.14 34.36 9.87 31.83 0.00 357 62 PEAK
Avg	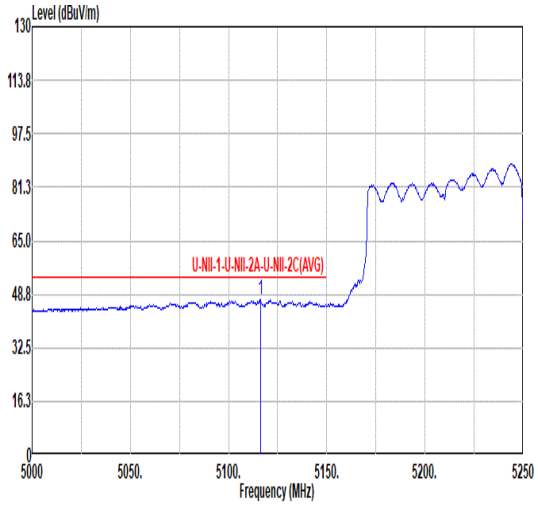 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5116.25 47.21 54.00 -6.79 35.23 34.13 9.76 31.91 0.00 357 62 AVERAGE	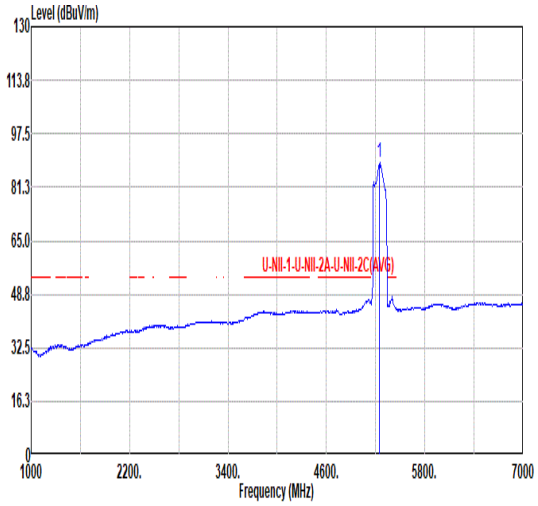 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5250.00 88.75 ------ ------ 76.40 34.32 9.86 31.83 0.00 357 62 AVERAGE

Mode	42	
	Band Edge - R	
	U-NII-2A_5.15-5.35_802.11ax HE160_CH50_Full_5250MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	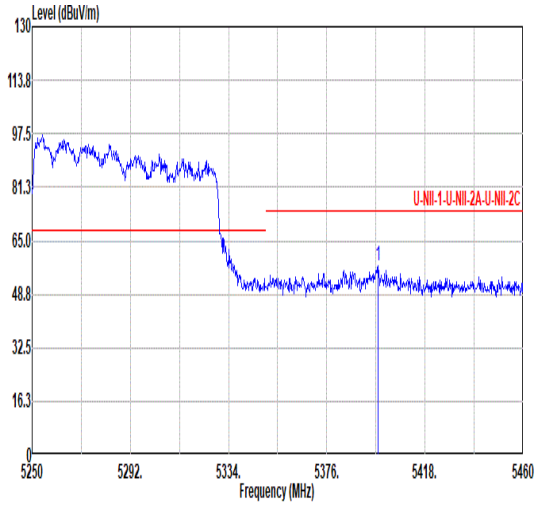 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5398.05 57.45 74.00 -16.55 44.57 34.70 9.94 31.76 0.00 357 62 PEAK	Blank
Avg	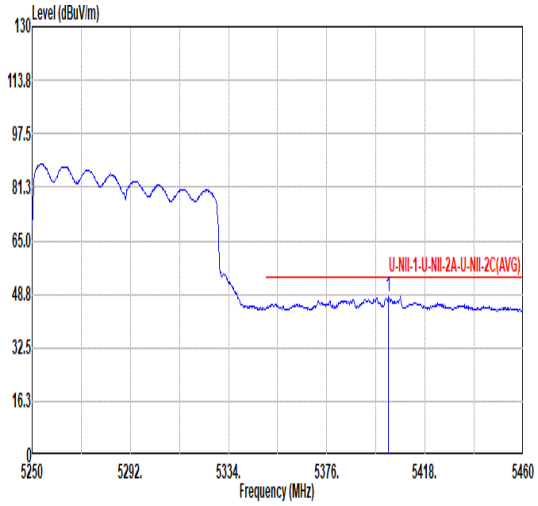 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5402.46 47.87 54.00 -6.13 34.99 34.70 9.94 31.76 0.00 357 62 AVERAGE	Blank

Mode	42	
	Harmonic	
	U-NII-2A_5.15-5.35_802.11ax HE160_CH50_Full_5250MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	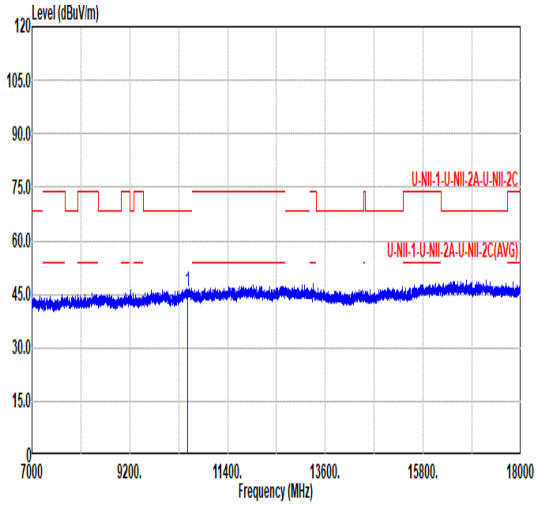 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10500.00 45.57 68.20 -22.63 54.92 37.70 14.22 61.27 0.00 --- --- Peak	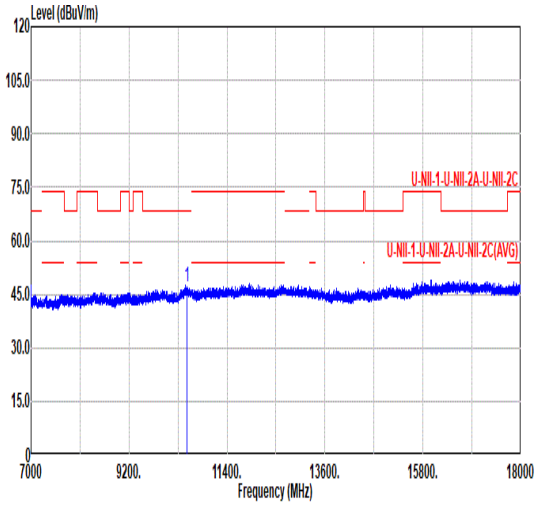 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10500.00 47.11 68.20 -21.09 56.46 37.70 14.22 61.27 0.00 --- --- PEAK

Mode	43	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full_5570MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	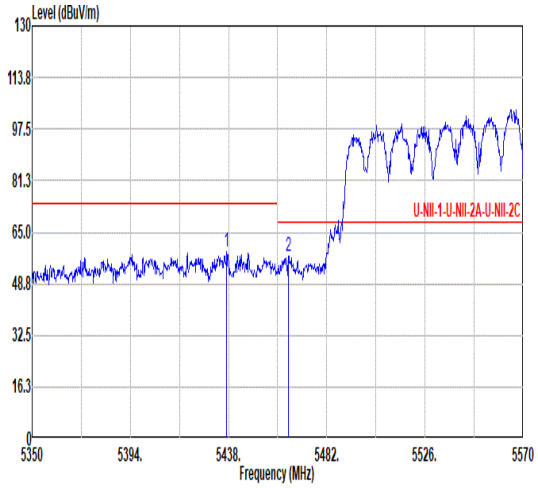 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5437.12 59.10 74.00 -14.90 46.08 34.77 9.99 31.74 0.00 100 263 PEAK 2 5464.84 57.57 68.20 -10.63 44.49 34.77 10.03 31.72 0.00 100 263 PEAK	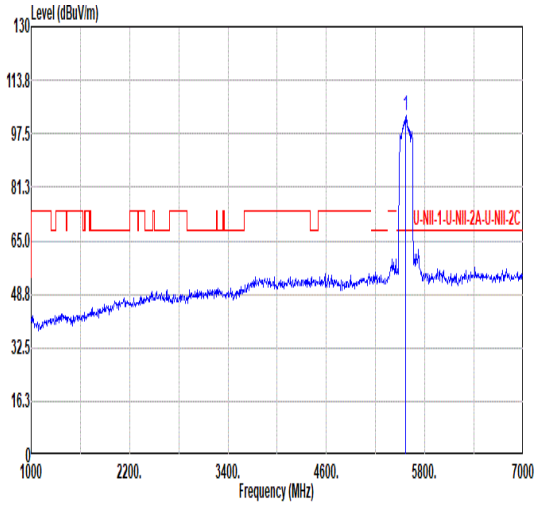 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5570.00 102.96 ------ ------ 89.81 34.60 10.21 31.66 0.00 100 263 PEAK
Avg	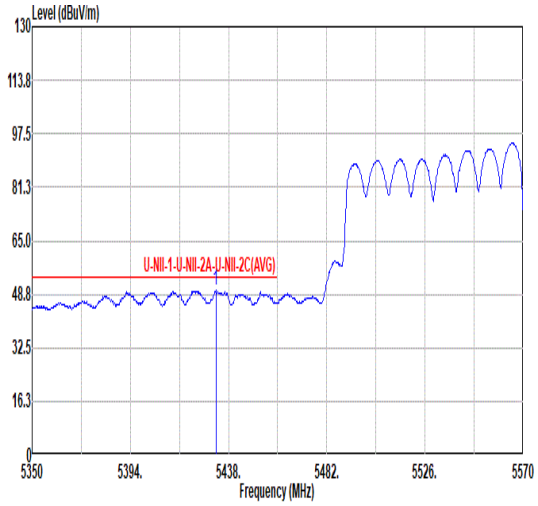 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5432.28 49.91 54.00 -4.09 36.91 34.76 9.98 31.74 0.00 100 263 AVERAGE	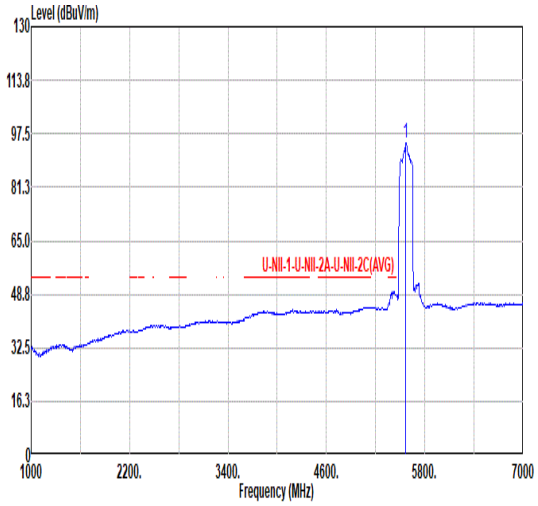 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5570.00 94.65 ------ ------ 81.53 34.60 10.19 31.67 0.00 100 263 AVERAGE

Mode	43	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full_5570MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	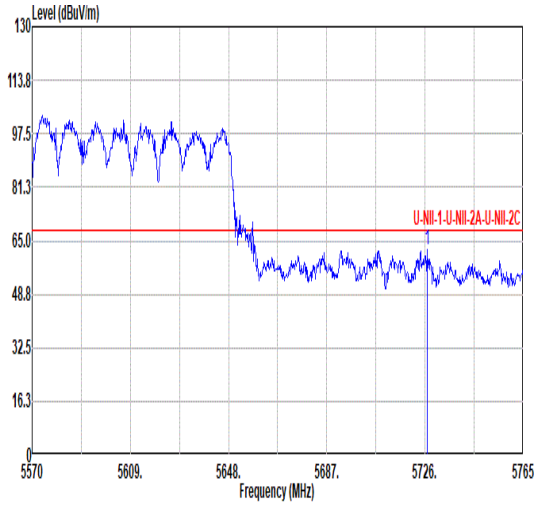 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5726.98 62.25 68.20 -5.95 49.14 34.60 10.35 31.84 0.00 100 263 PEAK	Blank

Mode	43	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full_5570MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	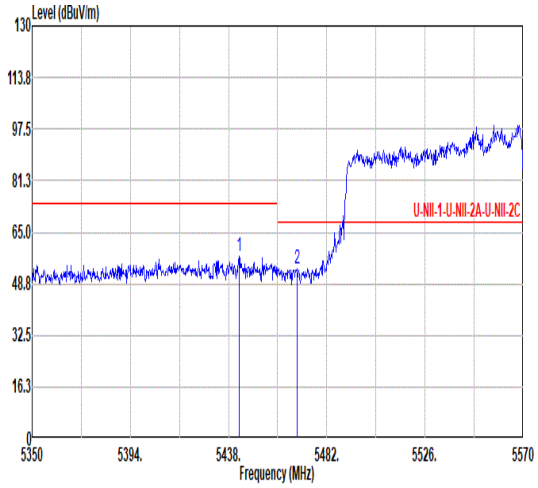 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5442.62 57.60 74.00 -16.40 44.54 34.79 10.00 31.73 0.00 332 54 PEAK 2 5468.58 53.65 68.20 -14.55 40.57 34.76 10.04 31.72 0.00 332 54 PEAK	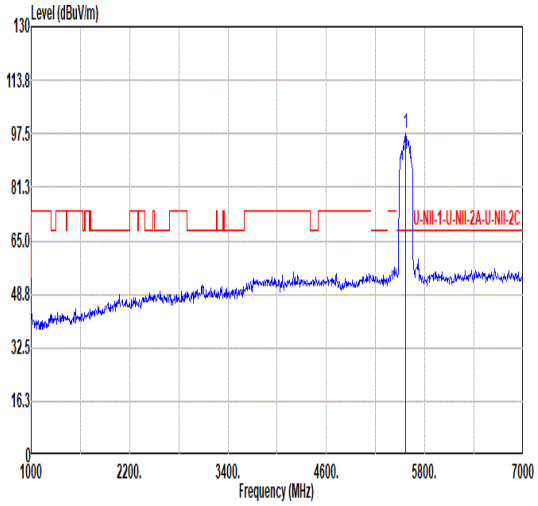 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5570.00 97.78 ------ ------ 84.66 34.60 10.19 31.67 0.00 332 54 PEAK
Avg	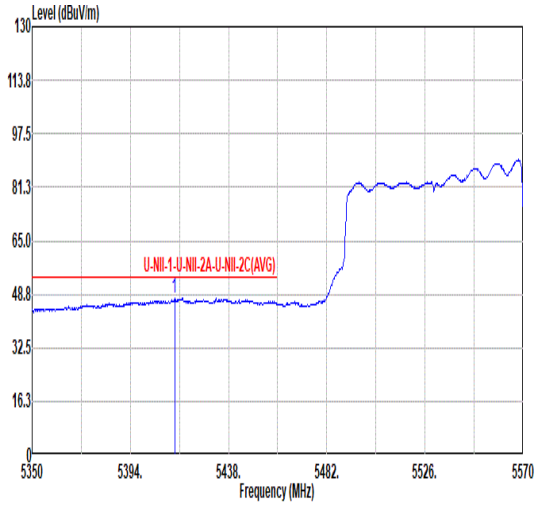 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5413.80 47.59 54.00 -6.41 34.65 34.73 9.96 31.75 0.00 332 54 AVERAGE	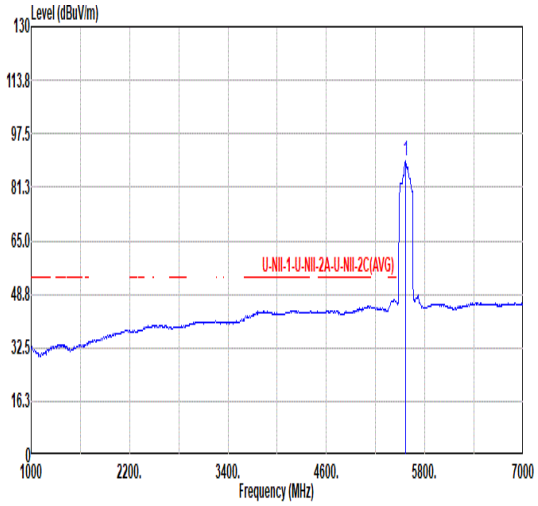 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5570.00 89.30 ------ ------ 76.18 34.60 10.19 31.67 0.00 332 54 AVERAGE

Mode	43	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full_5570MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	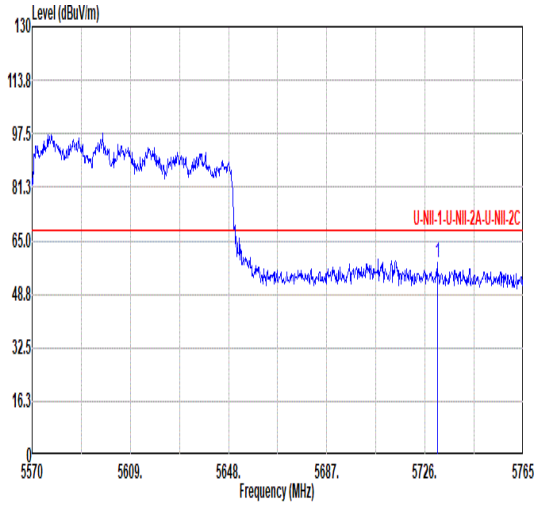 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5730.88 58.14 68.20 -10.06 45.04 34.60 10.35 31.85 0.00 332 54 PEAK	Blank

Mode	43	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full_5570MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	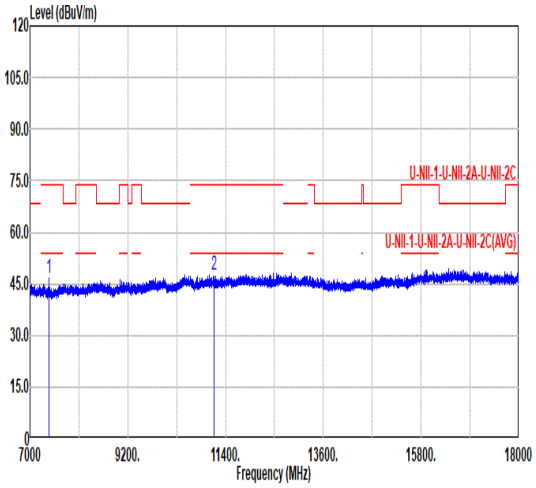 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7426.80 46.61 74.00 -27.39 60.14 35.70 11.76 60.99 0.00 --- --- Peak 2 11140.00 47.44 74.00 -26.56 55.99 38.00 14.66 61.21 0.00 --- --- PEAK	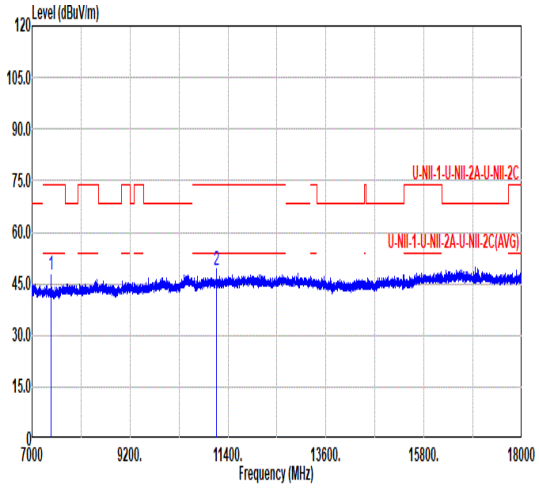 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7426.80 47.62 74.00 -26.38 61.15 35.70 11.76 60.99 0.00 --- --- Peak 2 11140.00 48.70 74.00 -25.30 57.25 38.00 14.66 61.21 0.00 --- --- PEAK

Mode	34	
	18G-40G	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full_5310MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	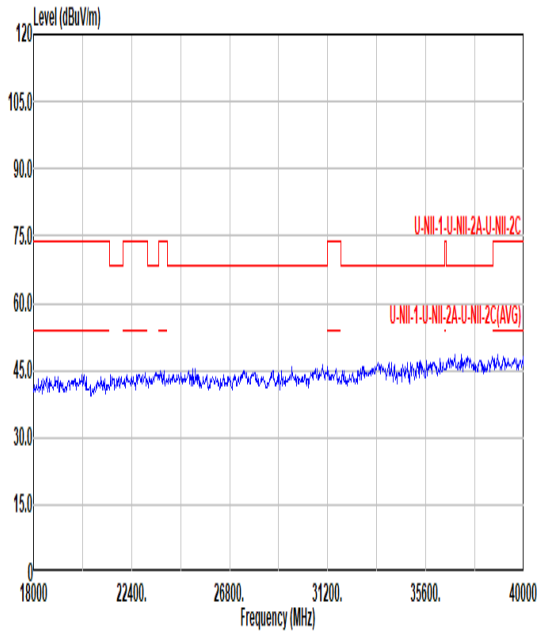	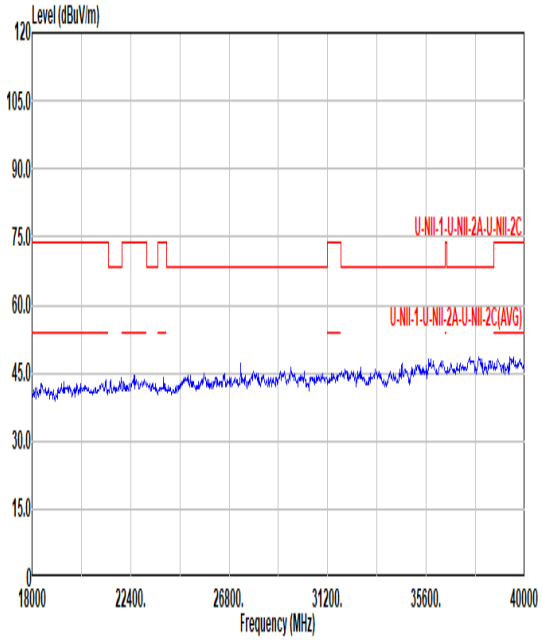

Mode	34	
	18G-40G	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full_5310MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
QP	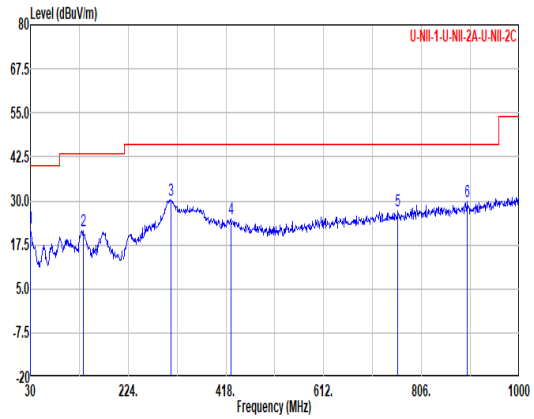	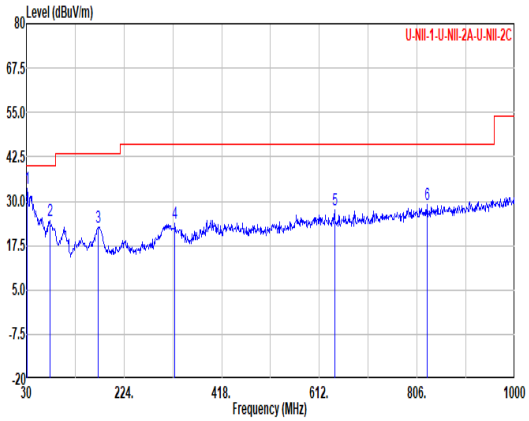

Horizontal:

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	30.00	22.16	40.00	-17.84	28.61	25.74	0.76	32.95	0.00	---	---	Peak
2	134.76	21.56	43.50	-21.94	34.99	17.56	1.71	32.70	0.00	---	---	Peak
3	308.39	30.33	46.00	-15.67	41.03	19.55	2.59	32.84	0.00	---	---	Peak
4	428.67	24.77	46.00	-21.23	32.39	22.50	3.08	33.20	0.00	---	---	Peak
5	759.44	27.14	46.00	-18.86	28.72	27.60	4.10	33.28	0.00	---	---	Peak
6	897.18	29.76	46.00	-16.24	28.87	29.06	4.47	32.64	0.00	---	---	Peak

Vertical:

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	31.94	33.46	40.00	-6.54	41.27	24.39	0.76	32.96	0.00	---	---	Peak
2	76.56	24.40	40.00	-15.60	41.08	14.30	1.23	32.21	0.00	---	---	Peak
3	172.59	22.46	43.50	-21.04	37.66	15.63	1.91	32.74	0.00	---	---	Peak
4	324.88	23.84	46.00	-22.16	34.13	19.97	2.65	32.91	0.00	---	---	Peak
5	642.07	27.63	46.00	-18.37	31.04	26.41	3.71	33.53	0.00	---	---	Peak
6	826.37	29.23	46.00	-16.77	29.58	28.43	4.24	33.02	0.00	---	---	Peak

Mode	44	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Fundamental
Peak	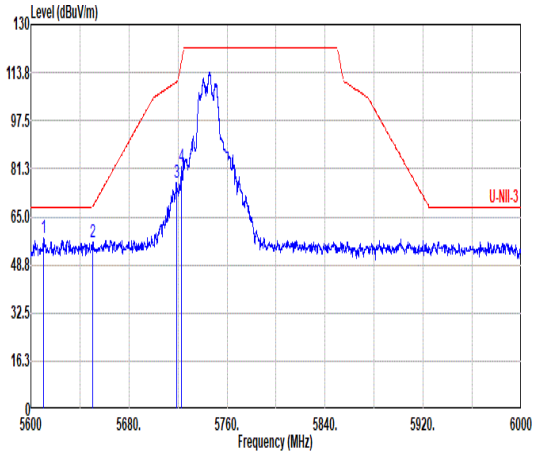 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.61 57.78 68.20 -10.42 40.05 34.52 13.21 30.00 0.00 101 244 PEAK 2 5650.21 56.47 68.36 -11.89 38.42 34.60 13.46 30.01 0.00 101 244 PEAK 3 5718.61 76.70 110.51 -33.81 58.32 34.64 13.87 30.13 0.00 101 244 PEAK 4 5723.01 81.87 117.77 -35.90 63.46 34.65 13.90 30.14 0.00 101 244 PEAK	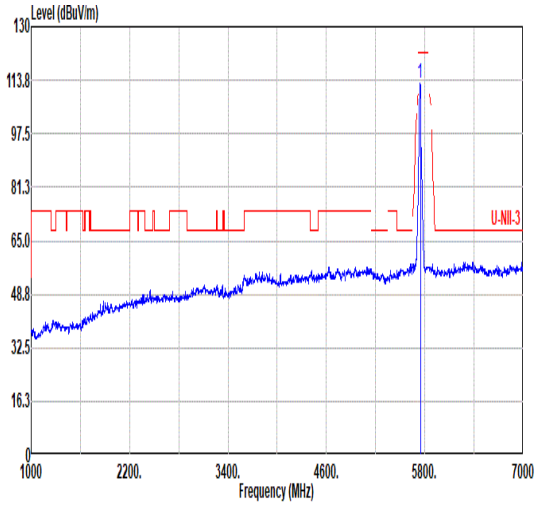 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 112.79 ------ ------ 94.25 34.69 14.02 30.17 0.00 101 244 PEAK
Avg	Blank	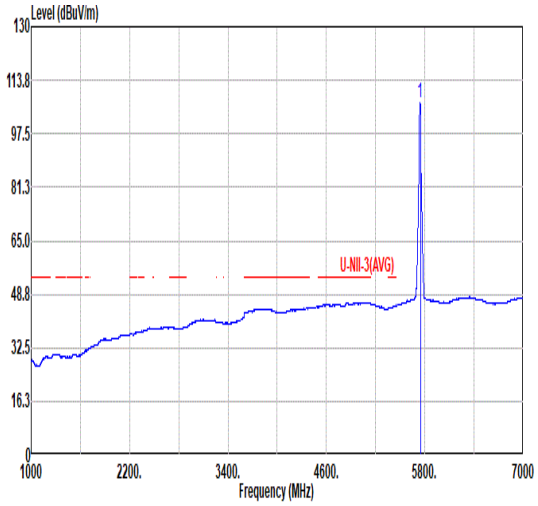 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 106.89 ------ ------ 88.35 34.69 14.02 30.17 0.00 101 244 AVERAGE

Mode	44	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	CDD 5+8	
Pol.	Vertical	Fundamental
Peak	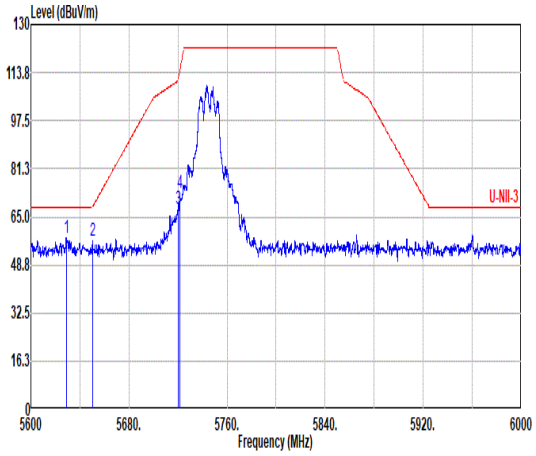 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5629.01 57.79 68.20 -10.41 39.89 34.56 13.33 29.99 0.00 348 43 PEAK 2 5650.21 56.80 68.36 -11.56 38.75 34.60 13.46 30.01 0.00 348 43 PEAK 3 5720.00 67.62 110.90 -43.28 49.23 34.64 13.88 30.13 0.00 348 43 PEAK 4 5721.41 73.26 114.12 -40.86 54.86 34.64 13.89 30.13 0.00 348 43 PEAK	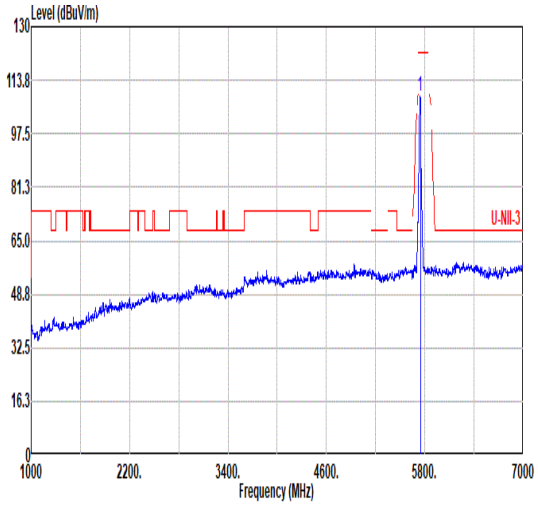 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 108.83 ------ ------ 90.29 34.69 14.02 30.17 0.00 348 43 PEAK
Avg	Blank	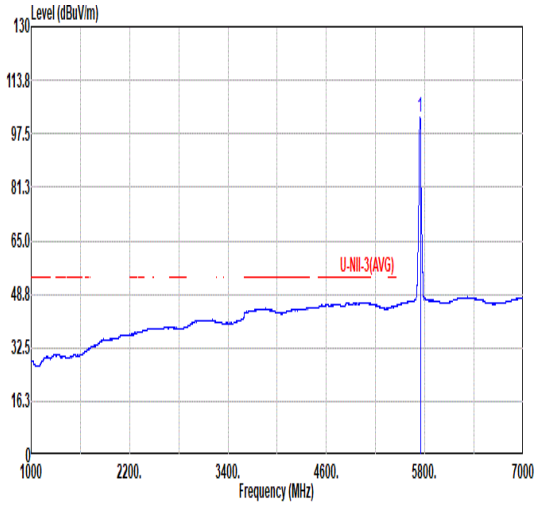 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 102.50 ------ ------ 83.96 34.69 14.02 30.17 0.00 348 43 AVERAGE

Mode	44	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	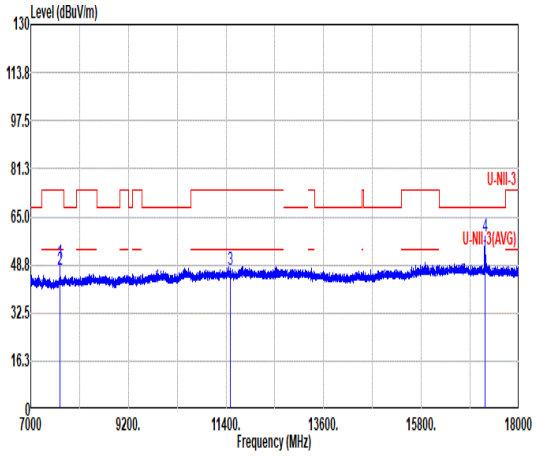 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7660.00 49.31 74.00 -24.69 62.32 35.82 12.01 60.84 0.00 100 330 Peak 2 7660.00 47.34 54.00 -6.66 60.35 35.82 12.01 60.84 0.00 100 330 Average 3 11490.00 46.90 74.00 -27.10 54.98 38.19 14.91 61.18 0.00 --- --- PEAK 4 17234.40 58.38 68.20 -9.82 62.05 40.90 18.36 62.93 0.00 --- --- Peak	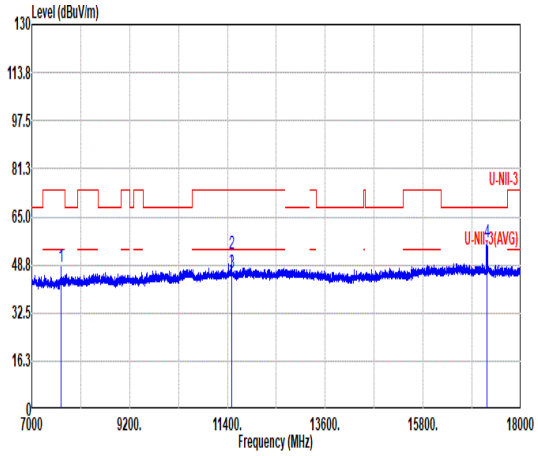 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7660.00 48.13 74.00 -25.87 61.14 35.82 12.01 60.84 0.00 --- --- Peak 2 11490.00 52.62 74.00 -21.38 60.70 38.19 14.91 61.18 0.00 100 44 PEAK 3 11490.00 46.24 54.00 -7.76 54.32 38.19 14.91 61.18 0.00 100 44 AVERAGE 4 17228.90 56.25 68.20 -11.95 59.92 40.90 18.36 62.93 0.00 --- --- Peak

Mode	45	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz	
ANT	CDD 5+8	
Pol.	Horizontal	Vertical
Peak Avg	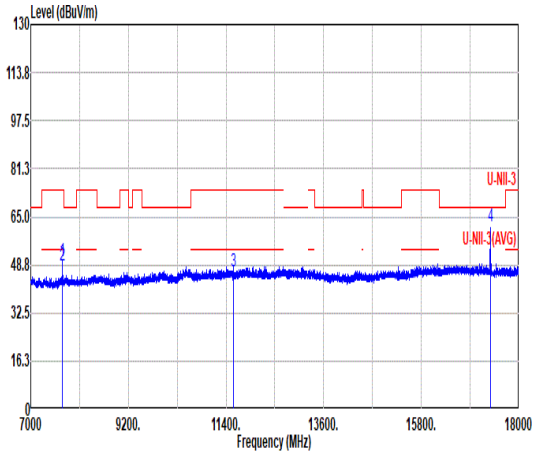 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7713.90 49.97 74.00 -24.03 62.73 35.90 12.07 60.73 0.00 100 327 Peak 2 7713.90 48.36 54.00 -5.64 61.12 35.90 12.07 60.73 0.00 100 327 Average 3 11570.00 46.52 74.00 -27.48 54.48 38.27 14.97 61.20 0.00 --- --- PEAK 4 17355.00 61.90 68.20 -6.30 65.49 40.90 18.44 62.93 0.00 103 254 PEAK	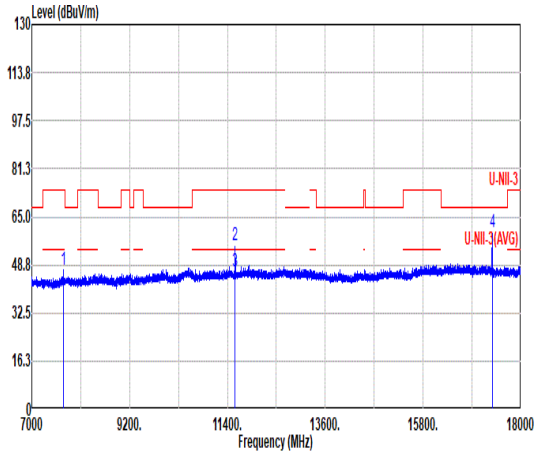 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7712.80 47.17 74.00 -26.83 59.94 35.90 12.06 60.73 0.00 --- --- Peak 2 11570.00 55.47 74.00 -18.53 63.43 38.27 14.97 61.20 0.00 100 36 PEAK 3 11570.00 46.76 54.00 -7.24 54.72 38.27 14.97 61.20 0.00 100 36 AVERAGE 4 17355.00 59.85 68.20 -8.35 63.44 40.90 18.44 62.93 0.00 100 42 PEAK