11AX40MIMO_Ant6_2437_30~1000
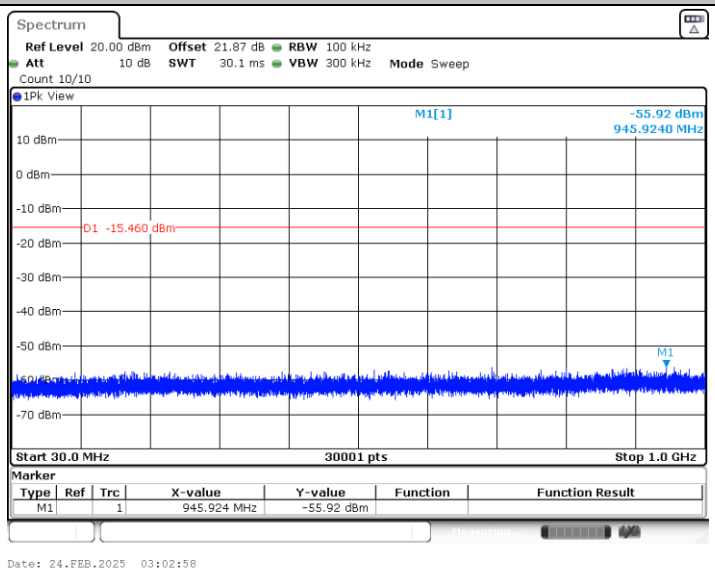

11AX40MIMO_Ant6_2437_1000~26500
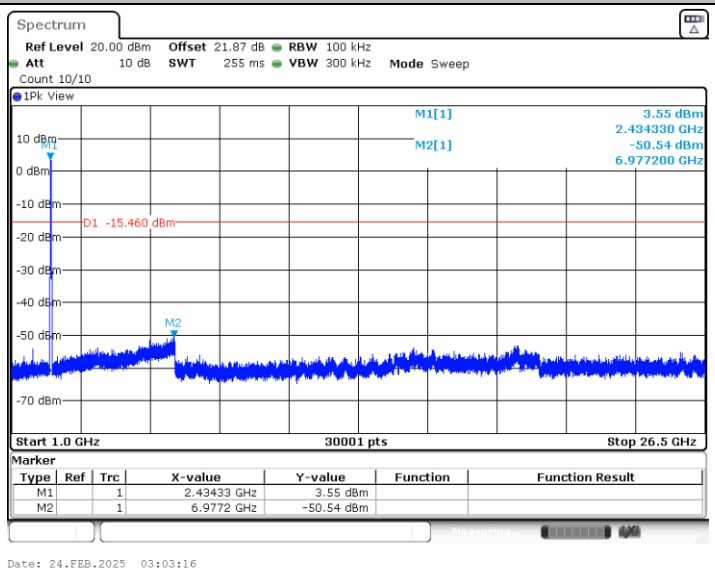

11AX40MIMO_Ant3_2437_30~1000
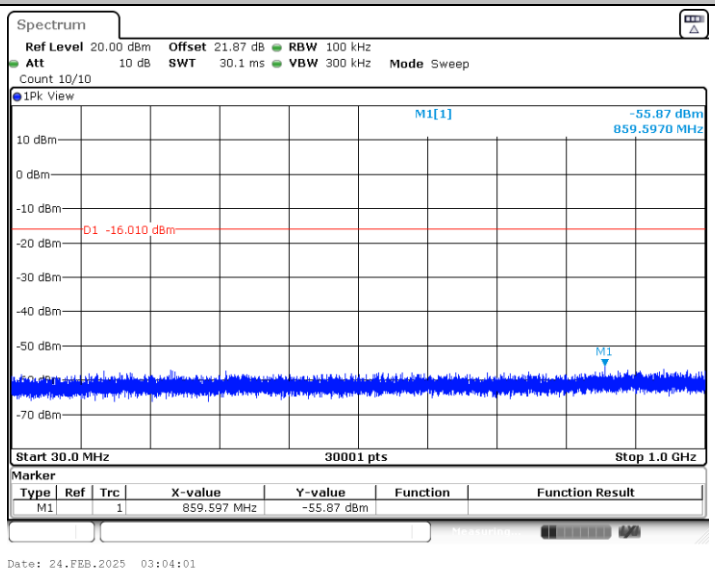

11AX40MIMO_Ant3_2437_1000~26500
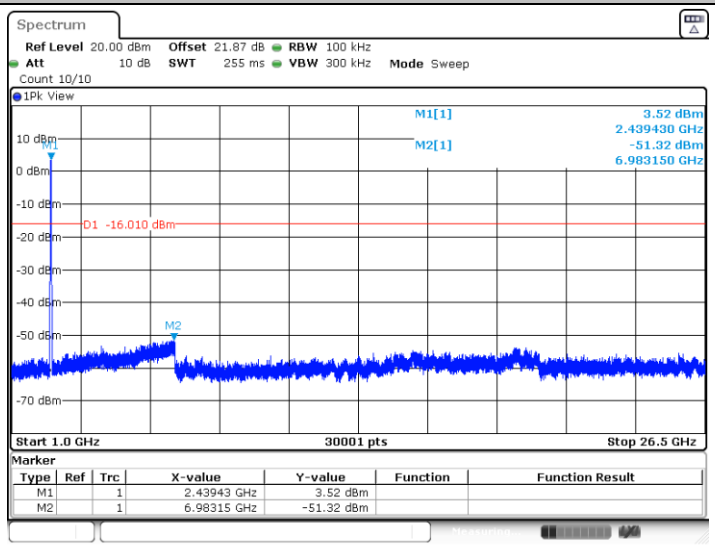

11AX40MIMO_Ant6_2452_30~1000
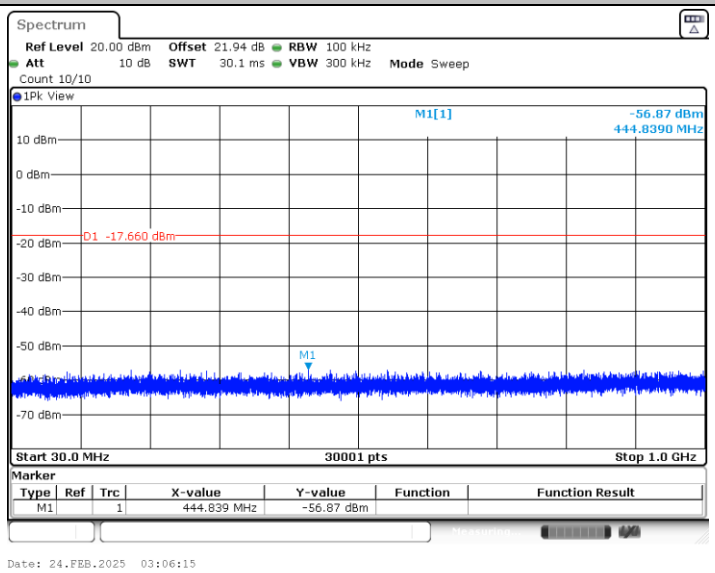

11AX40MIMO_Ant6_2452_1000~26500
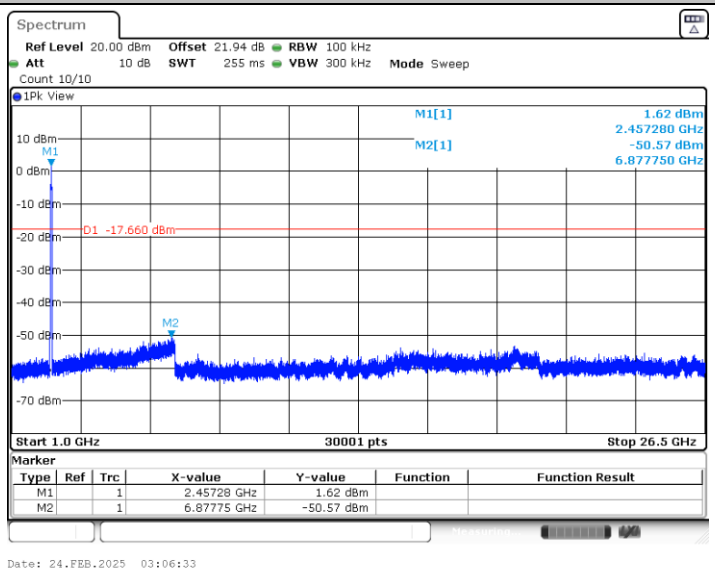

11AX40MIMO_Ant3_2452_30~1000
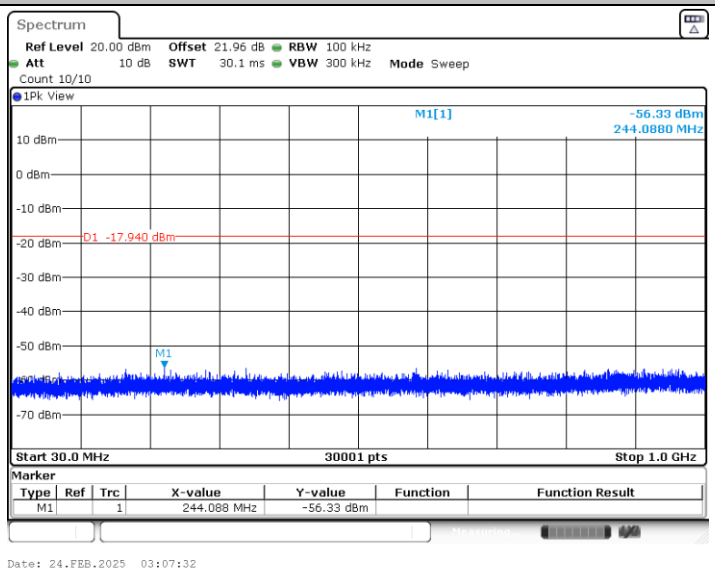

11AX40MIMO_Ant3_2452_1000~26500
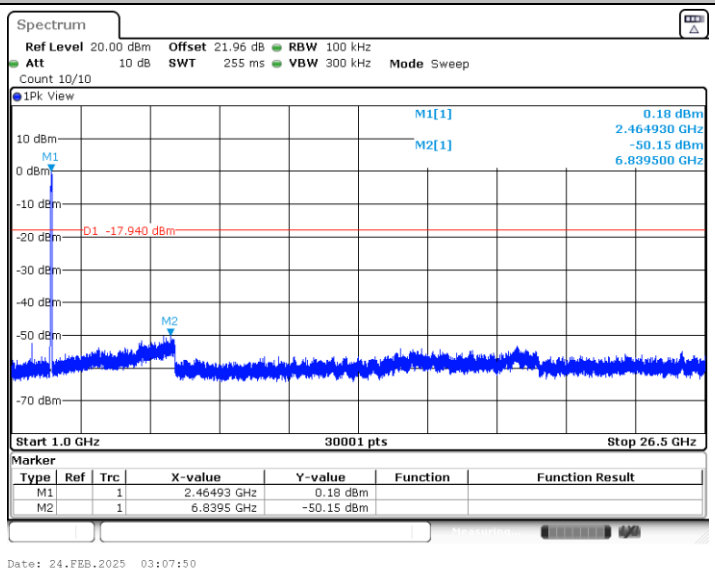

Partial RU

Maximum power spectral density

Test Result

TestMode	Antenna	Freq(MHz)	RuSize	RuIndex	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11AX20MIMO	Ant6	2412	26Tone	RU0	-8.25	≤8.00	PASS
			52Tone	RU37	-7.75	≤8.00	PASS
			106Tone	RU53	-7.93	≤8.00	PASS
	Ant3	2412	26Tone	RU0	-7.82	≤8.00	PASS
			52Tone	RU37	-7.86	≤8.00	PASS
			106Tone	RU53	-7.85	≤8.00	PASS
	total	2412	26Tone	RU0	-5.02	≤8.00	PASS
			52Tone	RU37	-4.79	≤8.00	PASS
			106Tone	RU53	-4.88	≤8.00	PASS
	Ant6	2437	26Tone	RU0	-3.8	≤8.00	PASS
			52Tone	RU37	-3.73	≤8.00	PASS
			106Tone	RU53	-3.65	≤8.00	PASS
	Ant3	2437	26Tone	RU0	-3.54	≤8.00	PASS
			52Tone	RU37	-3.8	≤8.00	PASS
			106Tone	RU53	-4.11	≤8.00	PASS
	total	2437	26Tone	RU0	-0.66	≤8.00	PASS
			52Tone	RU37	-0.75	≤8.00	PASS
			106Tone	RU53	-0.86	≤8.00	PASS
	Ant6	2462	26Tone	RU8	-8.47	≤8.00	PASS
			52Tone	RU40	-8.69	≤8.00	PASS
			106Tone	RU54	-8.85	≤8.00	PASS
	Ant3	2462	26Tone	RU8	-8.93	≤8.00	PASS
			52Tone	RU40	-8.68	≤8.00	PASS
			106Tone	RU54	-8.61	≤8.00	PASS
	total	2462	26Tone	RU8	-5.68	≤8.00	PASS
			52Tone	RU40	-5.67	≤8.00	PASS
			106Tone	RU54	-5.72	≤8.00	PASS

Test Graphs

11AX20MIMO_Ant6_2412_26Tone_RU0

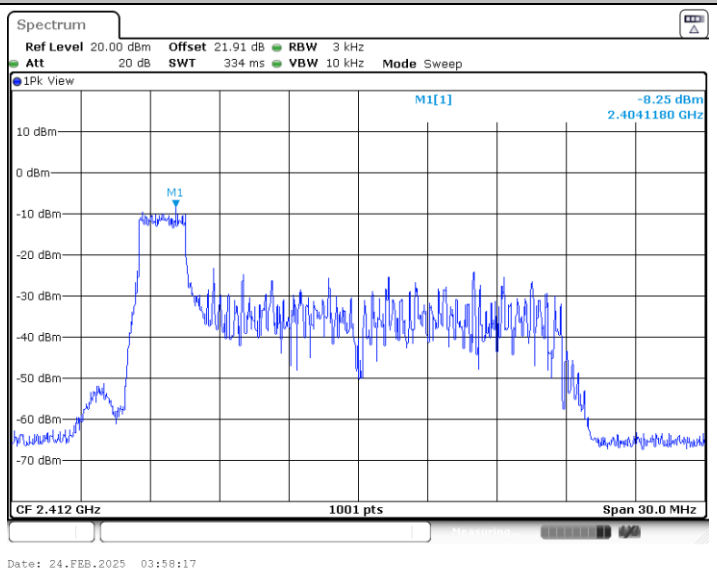

11AX20MIMO_Ant6_2412_52Tone_RU37

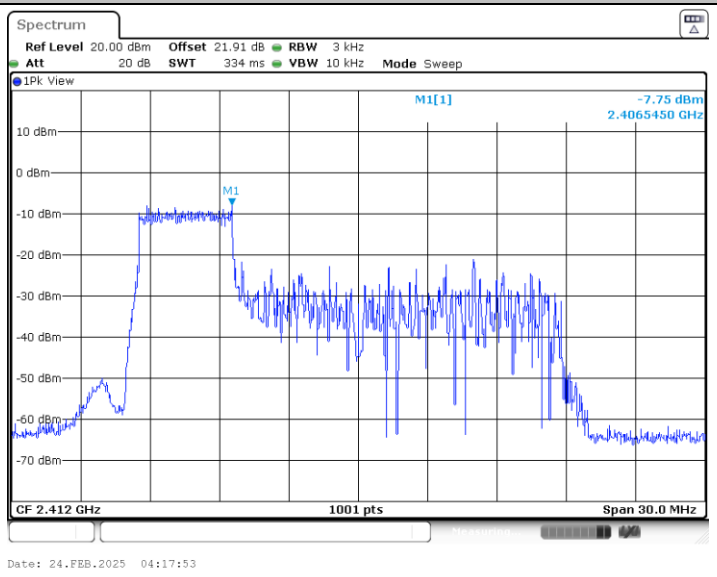

11AX20MIMO_Ant6_2412_106Tone_RU53
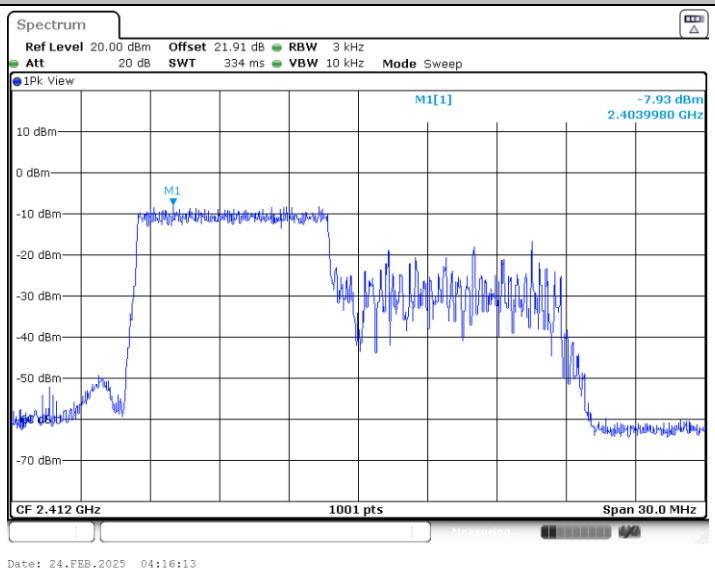

11AX20MIMO_Ant3_2412_26Tone_RU0
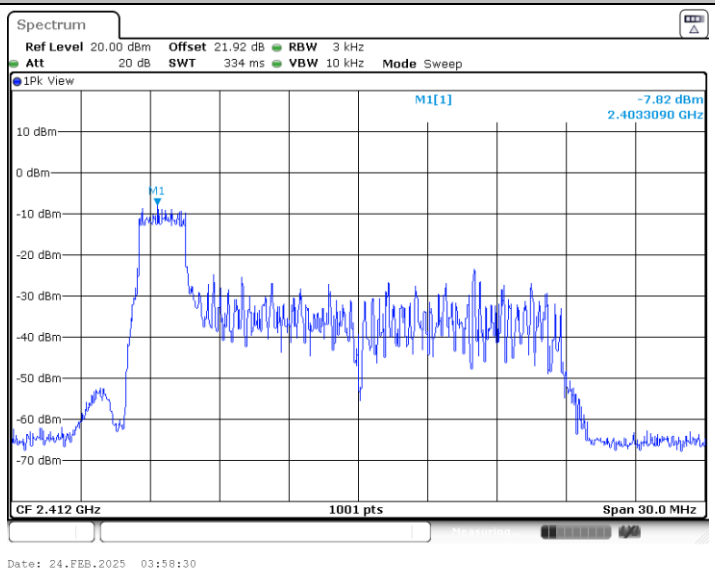

11AX20MIMO_Ant3_2412_52Tone_RU37
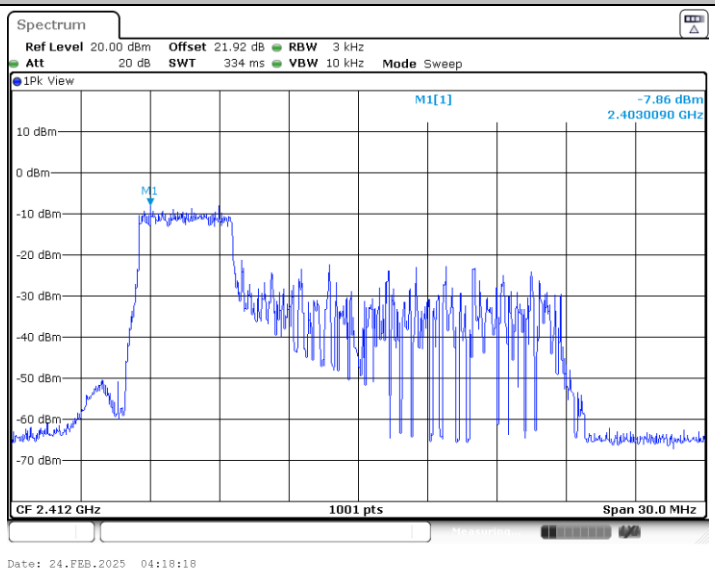

11AX20MIMO_Ant3_2412_106Tone_RU53
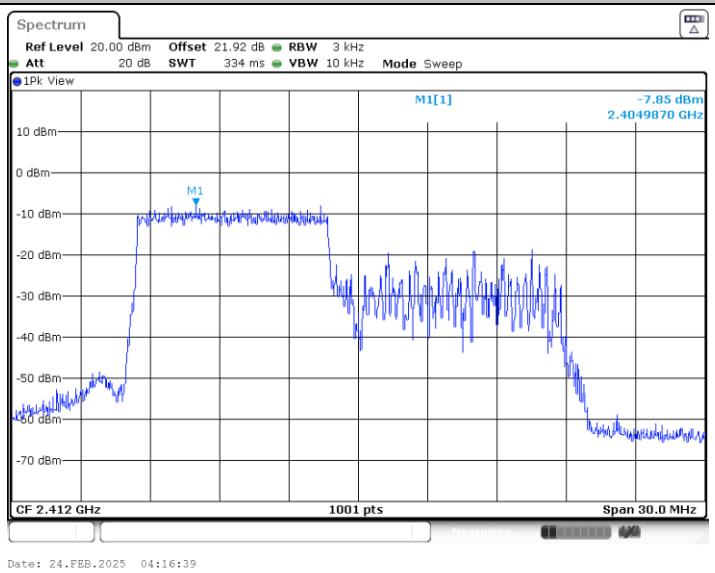

11AX20MIMO_Ant6_2437_26Tone_RU0
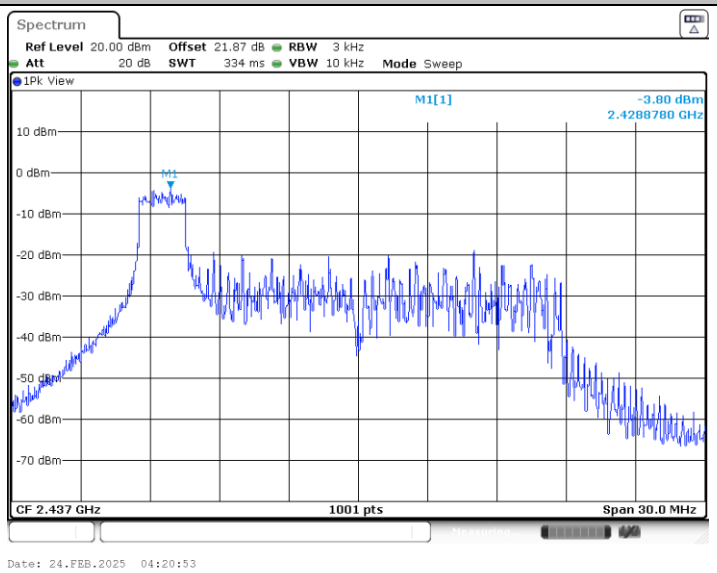

11AX20MIMO_Ant6_2437_52Tone_RU37
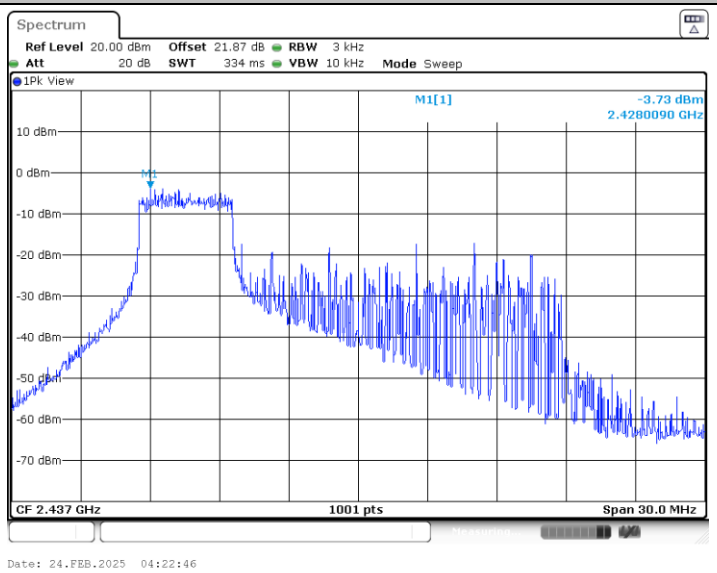

11AX20MIMO_Ant6_2437_106Tone_RU53
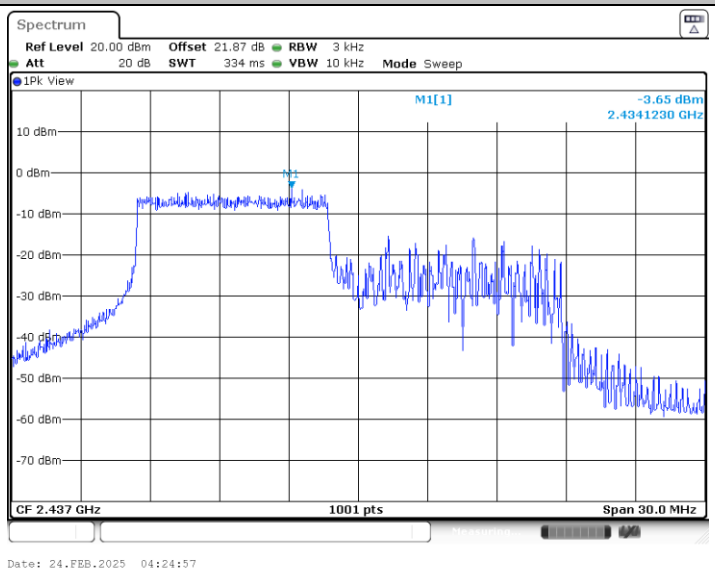

11AX20MIMO_Ant3_2437_26Tone_RU0
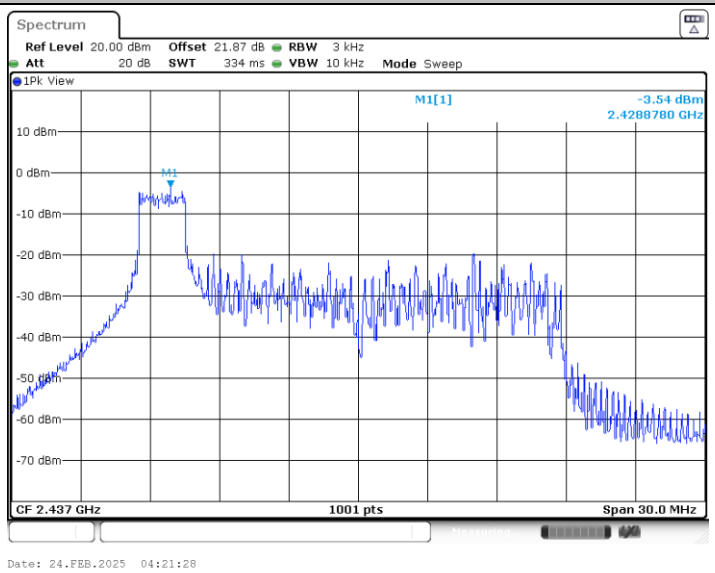

11AX20MIMO_Ant3_2437_52Tone_RU37
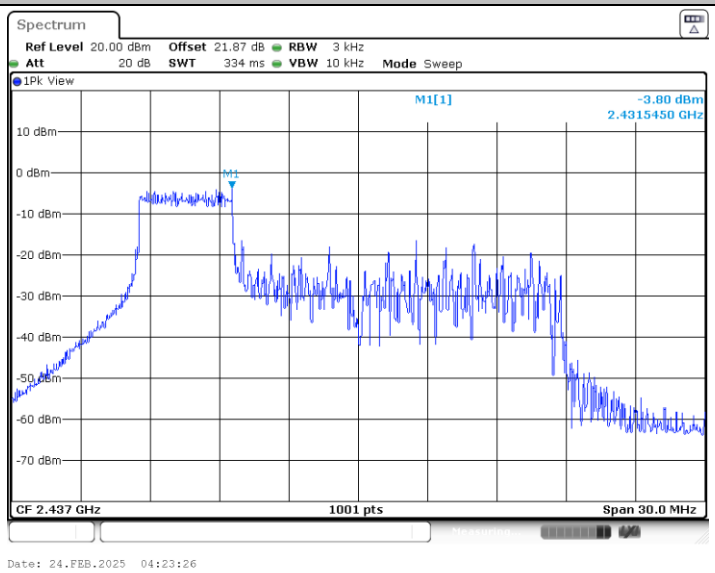

11AX20MIMO_Ant3_2437_106Tone_RU53
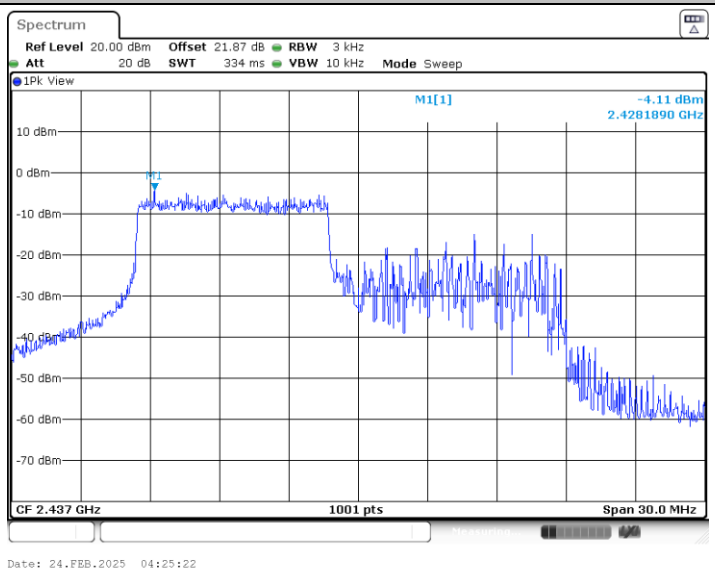

11AX20MIMO_Ant6_2462_26Tone_RU8
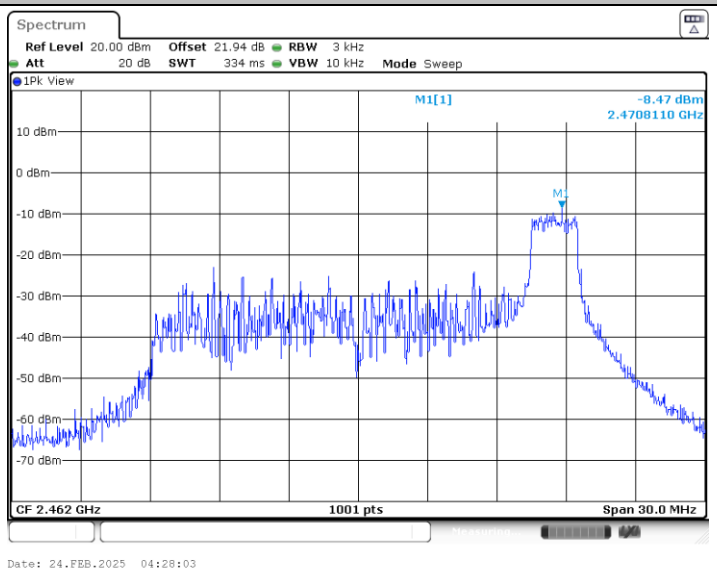

11AX20MIMO_Ant6_2462_52Tone_RU40
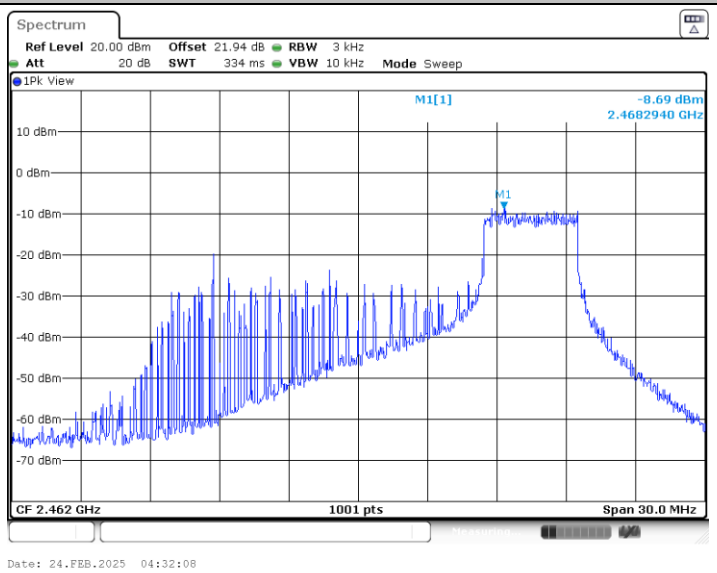

11AX20MIMO_Ant6_2462_106Tone_RU54
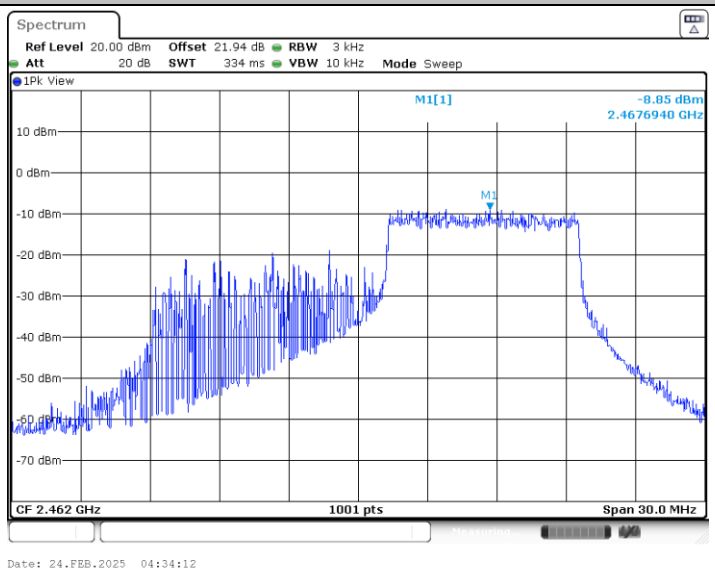

11AX20MIMO_Ant3_2462_26Tone_RU8
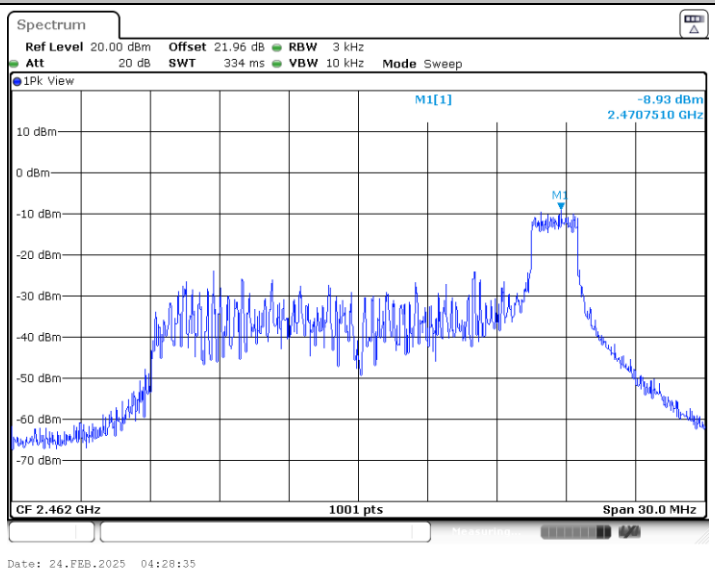

11AX20MIMO_Ant3_2462_52Tone_RU40
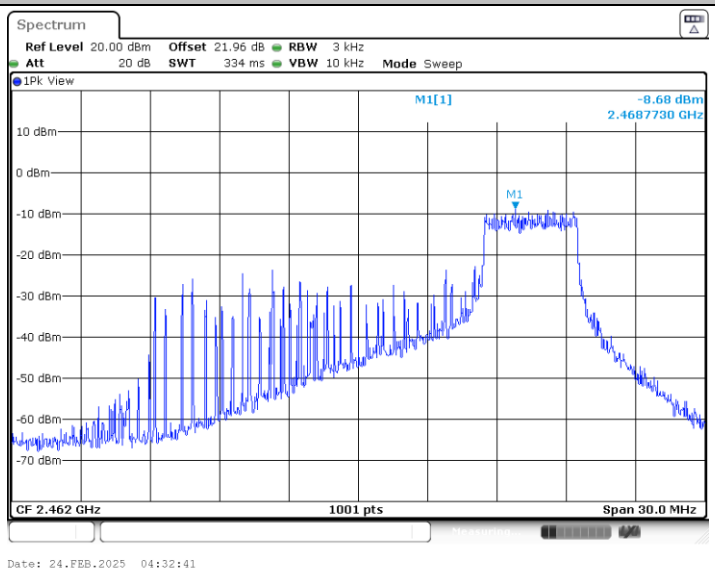

11AX20MIMO_Ant3_2462_106Tone_RU54
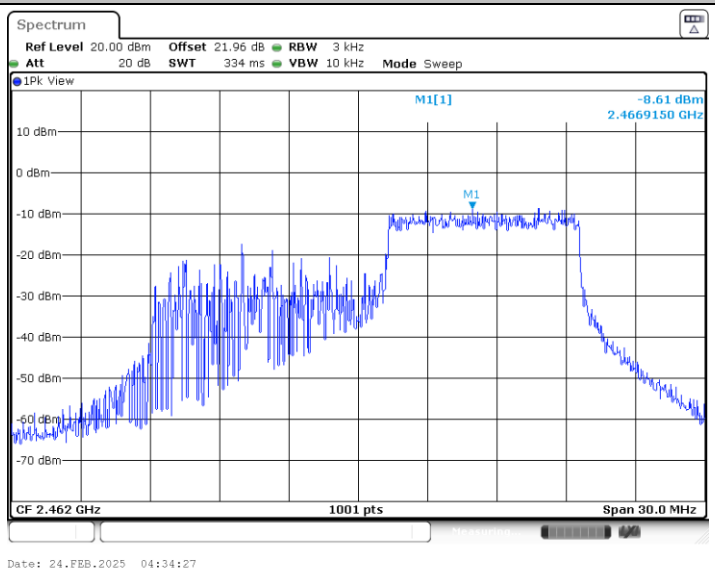

Appendix B. AC Conducted Emission Test Results

Test Engineer :	Nathon	**Temperature :**	22~24℃
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	**Phase :**	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

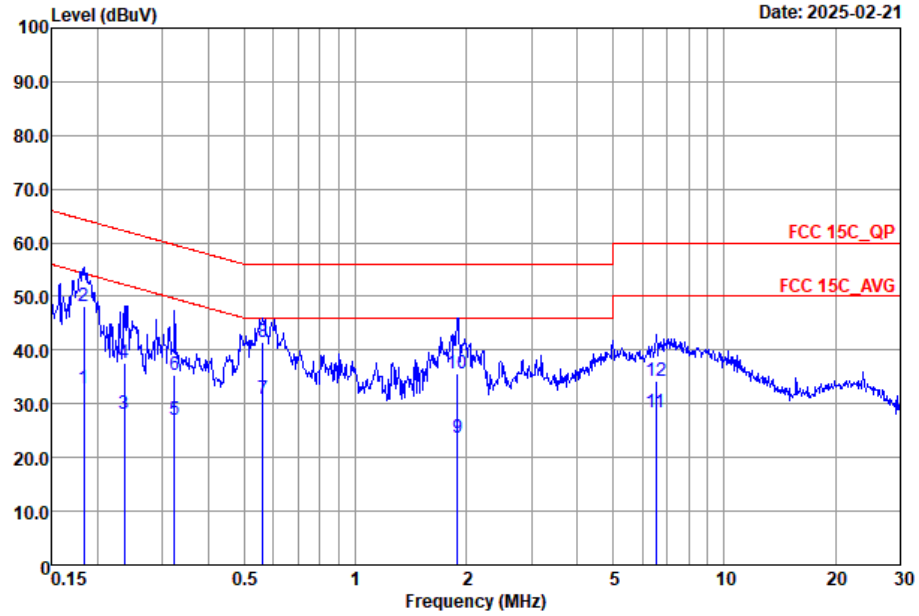

Site : CO02-SZ
Condition : FCC 15C_QP LISN_2025-L LINE

		Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
		MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1		0.18	32.78	-21.55	54.33	12.91	9.69	10.18	Average
2		0.18	48.28	-16.05	64.33	28.41	9.69	10.18	QP
3		0.24	28.21	-24.01	52.22	8.30	9.72	10.19	Average
4		0.24	37.71	-24.51	62.22	17.80	9.72	10.19	QP
5		0.32	27.16	-22.46	49.62	7.21	9.74	10.21	Average
6		0.32	35.26	-24.36	59.62	15.31	9.74	10.21	QP
7		0.56	31.01	-14.99	46.00	11.10	9.67	10.24	Average
8	*	0.56	41.41	-14.59	56.00	21.50	9.67	10.24	QP
9		1.89	23.62	-22.38	46.00	3.70	9.66	10.26	Average
10		1.89	35.62	-20.38	56.00	15.70	9.66	10.26	QP
11		6.52	28.28	-21.72	50.00	8.40	9.64	10.24	Average
12		6.52	34.38	-25.62	60.00	14.50	9.64	10.24	QP

Test Engineer :	Nathon	**Temperature :**	22~24℃
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	**Phase :**	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

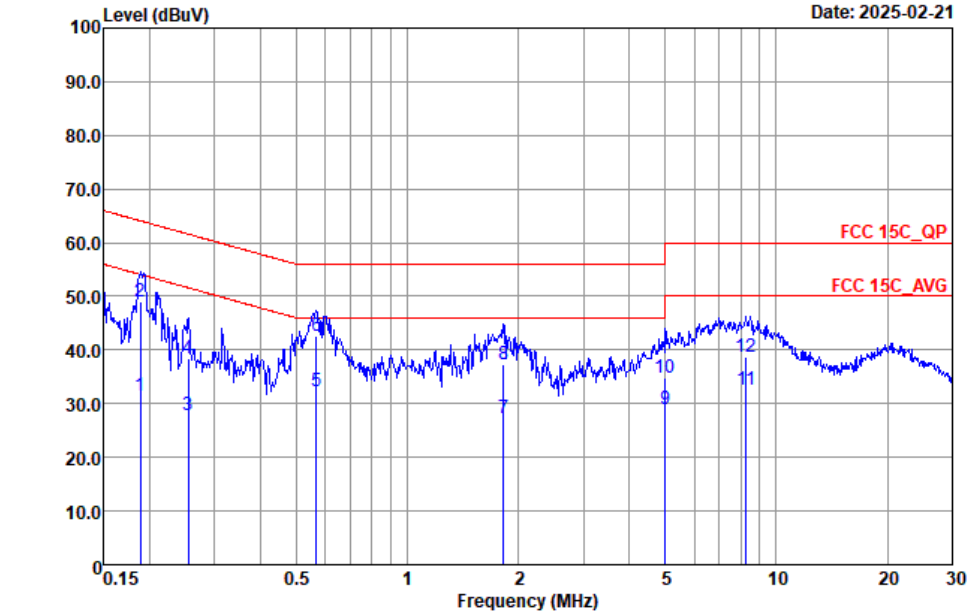

Site : CO02-SZ
Condition : FCC 15C_QP LISN_2025-N NEUTRAL

		Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
		MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1		0.19	31.61	-22.45	54.06	11.60	9.83	10.18	Average
2		0.19	48.91	-15.15	64.06	28.90	9.83	10.18	QP
3		0.25	27.75	-23.85	51.60	8.00	9.55	10.20	Average
4		0.25	38.55	-23.05	61.60	18.80	9.55	10.20	QP
5		0.57	32.27	-13.73	46.00	12.40	9.63	10.24	Average
6	*	0.57	42.57	-13.43	56.00	22.70	9.63	10.24	QP
7		1.82	27.36	-18.64	46.00	7.39	9.71	10.26	Average
8		1.82	37.46	-18.54	56.00	17.49	9.71	10.26	QP
9		5.00	28.97	-21.03	50.00	9.00	9.70	10.27	Average
10		5.00	34.87	-25.13	60.00	14.90	9.70	10.27	QP
11		8.28	32.51	-17.49	50.00	12.60	9.70	10.21	Average
12		8.28	38.61	-21.39	60.00	18.70	9.70	10.21	QP

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)

Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Jake zhou	Relative Humidity :	52~56%
		Temperature :	22~25℃

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	CDD 6+3	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	CDD 6+3	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	CDD 6+3	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	CDD 6+3	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	CDD 6+3	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	CDD 6+3	802.11g	11	2462	6Mbps	-	-
Mode 7	2400-2483.5	CDD 6+3	802.11ax HE20	01	2412	MCS0	Full RU	-
Mode 8	2400-2483.5	CDD 6+3	802.11ax HE20	06	2437	MCS0	Full RU	-
Mode 9	2400-2483.5	CDD 6+3	802.11ax HE20	11	2462	MCS0	Full RU	-
Mode 10	2400-2483.5	CDD 6+3	802.11ax HE40	03	2422	MCS0	Full RU	-
Mode 11	2400-2483.5	CDD 6+3	802.11ax HE40	06	2437	MCS0	Full RU	-
Mode 12	2400-2483.5	CDD 6+3	802.11ax HE40	09	2452	MCS0	Full RU	-
Mode 13	2400-2483.5	CDD 6+3	802.11ax HE20	01	2412	MCS0	RU26/0	-
Mode 14	2400-2483.5	CDD 6+3	802.11ax HE20	01	2412	MCS0	RU52/37	-
Mode 15	2400-2483.5	CDD 6+3	802.11ax HE20	01	2412	MCS0	RU106/53	-
Mode 16	2400-2483.5	CDD 6+3	802.11ax HE20	11	2462	MCS0	RU26/8	-
Mode 17	2400-2483.5	CDD 6+3	802.11ax HE20	11	2462	MCS0	RU52/40	-
Mode 18	2400-2483.5	CDD 6+3	802.11ax HE20	11	2462	MCS0	RU106/54	-
Mode 19	2400-2483.5	CDD 6+3	802.11ax HE20	2	2417	MCS0	Full RU	-
Mode 20	2400-2483.5	CDD 6+3	802.11ax HE20	10	2457	MCS0	Full RU	-
Mode 21	2400-2483.5	CDD 6+3	802.11ax HE40	03	2422	MCS0	Full RU	-
Mode 21	-	2	LTE B41	40620	2593	-	-	-
Mode 22	-	2	LTE B41	40620	2593	-	-	-
Mode 22	2400-2483.5	3	802.11ax HE40	03	2422	MCS0	-	-
Mode 22	2400-2483.5	6	Bluetooth-LE_GFSK_	38	2478	2Mbps	-	-

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11b	01	2389.04	50.39	54.00	-3.61	H	AVERAGE	Pass	Band Edge
1	802.11b	01	4824.00	45.12	74.00	-28.88	H	AVERAGE	Pass	Harmonic
2	802.11b	06	-	-	-	-	-	-	-	Band Edge
2	802.11b	06	4874.00	49.18	54.00	-4.82	H	AVERAGE	Pass	Harmonic
3	802.11b	11	2483.50	46.34	54.00	-7.66	V	AVERAGE	Pass	Band Edge
3	802.11b	11	4924.00	49.79	54.00	-4.21	H	AVERAGE	Pass	Harmonic
4	802.11g	01	2389.82	50.13	54.00	-3.87	V	AVERAGE	Pass	Band Edge
4	802.11g	01	4824.00	38.00	54.00	-16.00	H	AVERAGE	Pass	Harmonic
5	802.11g	06	-	-	-	-	-	-	-	Band Edge
5	802.11g	06	4874.00	39.17	54.00	-14.83	V	AVERAGE	Pass	Harmonic
6	802.11g	11	2484.40	49.94	54.00	-4.06	H	AVERAGE	Pass	Band Edge
6	802.11g	11	4924.00	44.66	54.00	-9.34	H	AVERAGE	Pass	Harmonic
7	802.11ax HE20	01	2389.95	48.32	54.00	-5.68	V	AVERAGE	Pass	Band Edge
7	802.11ax HE20	01	4824.00	47.80	74.00	-26.20	H	PEAK	Pass	Harmonic
8	802.11ax HE20	06	-	-	-	-	-	-	-	Band Edge
8	802.11ax HE20	06	4874.00	46.62	54.00	-7.38	H	AVERAGE	Pass	Harmonic
9	802.11ax HE20	11	2483.56	50.48	54.00	-3.52	H	AVERAGE	Pass	Band Edge
9	802.11ax HE20	11	4924.00	44.53	54.00	-9.47	H	AVERAGE	Pass	Harmonic
10	802.11ax HE40	03	2389.95	50.89	54.00	-3.11	V	AVERAGE	Pass	Band Edge
10	802.11ax HE40	03	7266.00	44.01	74.00	-29.99	V	PEAK	Pass	Harmonic
11	802.11ax HE40	06	2483.56	50.06	54.00	-3.94	V	AVERAGE	Pass	Band Edge
11	802.11ax HE40	06	4874.00	47.97	74.00	-26.03	H	PEAK	Pass	Harmonic
12	802.11ax HE40	09	2485.72	50.83	54.00	-3.17	V	AVERAGE	Pass	Band Edge
12	802.11ax HE40	09	4904.00	43.62	74.00	-30.38	H	PEAK	Pass	Harmonic
13	802.11ax HE20	01	2388.91	37.29	54.00	-16.71	V	AVERAGE	Pass	Band Edge
13	802.11ax HE20	01	-	-	-	-	-	-	-	Harmonic
14	802.11ax HE20	01	2389.95	37.76	54.00	-16.24	H	AVERAGE	Pass	Band Edge
14	802.11ax HE20	01	-	-	-	-	-	-	-	Harmonic
15	802.11ax HE20	01	2389.95	44.20	54.00	-9.80	V	AVERAGE	Pass	Band Edge
15	802.11ax HE20	01	-	-	-	-	-	-	-	Harmonic
16	802.11ax HE20	11	2487.16	41.09	54.00	-12.91	V	AVERAGE	Pass	Band Edge
16	802.11ax HE20	11	-	-	-	-	-	-	-	Harmonic
17	802.11ax HE20	11	2484.34	40.83	54.00	-13.17	V	AVERAGE	Pass	Band Edge
17	802.11ax HE20	11	-	-	-	-	-	-	-	Harmonic
18	802.11ax HE20	11	2484.94	50.75	54.00	-3.25	V	AVERAGE	Pass	Band Edge
18	802.11ax HE20	11	-	-	-	-	-	-	-	Harmonic
19	802.11ax HE20	2	2389.95	50.00	54.00	-4.00	V	AVERAGE	Pass	Band Edge
19	802.11ax HE20	2	4834.00	38.00	54.00	-16.00	H	AVERAGE	Pass	Harmonic
20	802.11ax HE20	10	2485.30	46.67	54.00	-7.33	V	AVERAGE	Pass	Band Edge
20	802.11ax HE20	10	4914.00	41.67	54.00	-12.33	H	AVERAGE	Pass	Harmonic
21	CO_TX		2389.97	46.03	54.00	-7.97	H	AVERAGE	Pass	Band Edge
21			7266.00	44.25	74.00	-29.75	V	Peak	Pass	Harmonic
22	CO_TX		2389.86	49.74	54.00	-4.26	H	AVERAGE	Pass	Band Edge
22			4695	47.77	74.00	-26.23	H	Peak	Pass	Harmonic

Mode	1	
	Band Edge	
	2400-2483.5_802.11b_CH01_2412MHz	
ANT	CDD 6+3	
Pol.	Horizontal	Fundamental
Peak	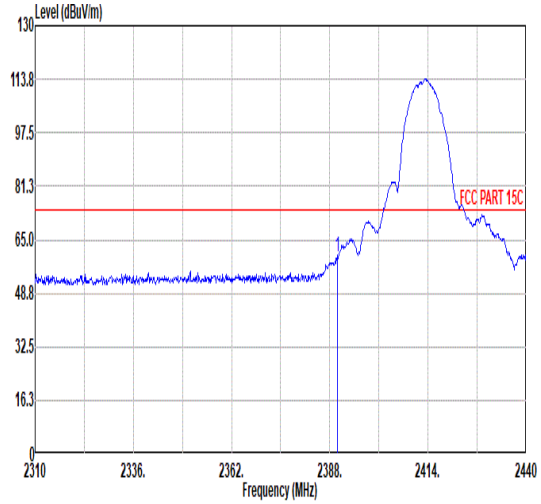	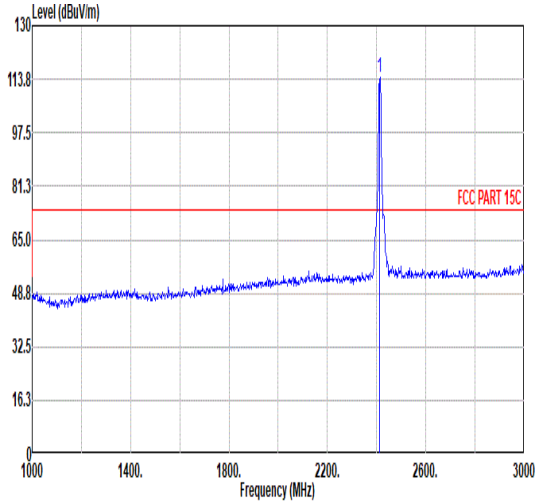
Avg	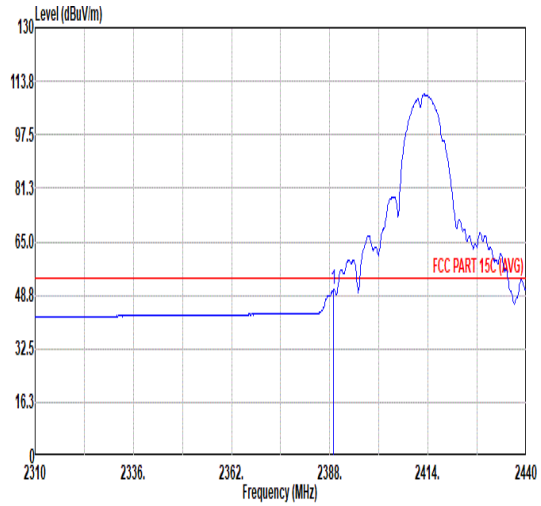	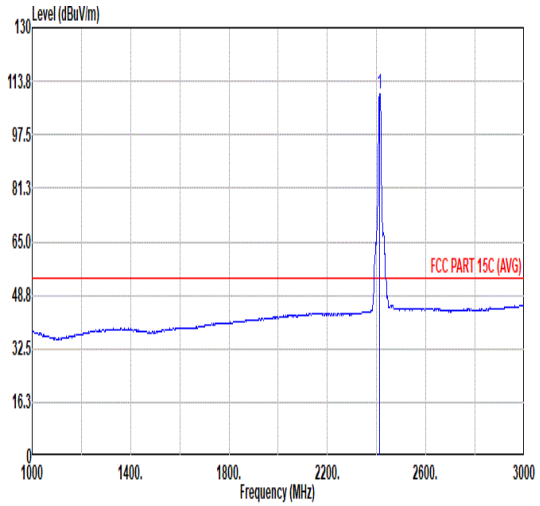

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.95	59.71	74.00	-14.29	46.81	32.48	6.60	32.18	6.00	234	0	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2412.00	114.19	------	------	101.20	32.54	6.64	32.19	6.00	234	0	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.04	50.39	54.00	-3.61	37.50	32.47	6.60	32.18	6.00	234	0	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2412.00	109.90	------	------	96.91	32.55	6.63	32.19	6.00	234	0	AVERAGE

Mode	1	
	Band Edge	
	2400-2483.5_802.11b_CH01_2412MHz	
ANT	CDD 6+3	
Pol.	Vertical	Fundamental
Peak	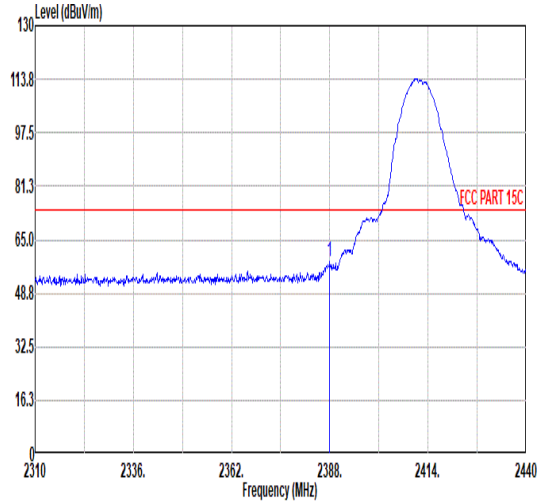	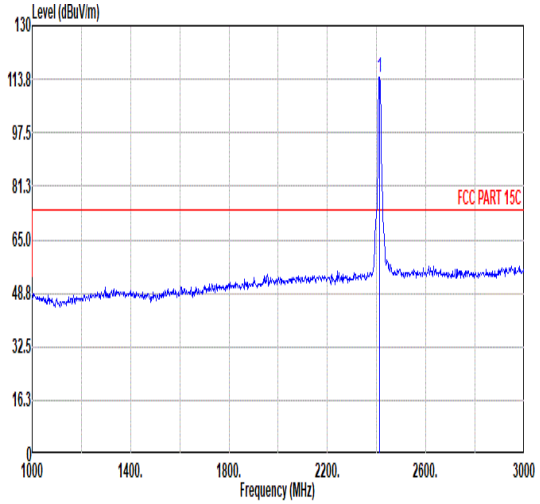
Avg	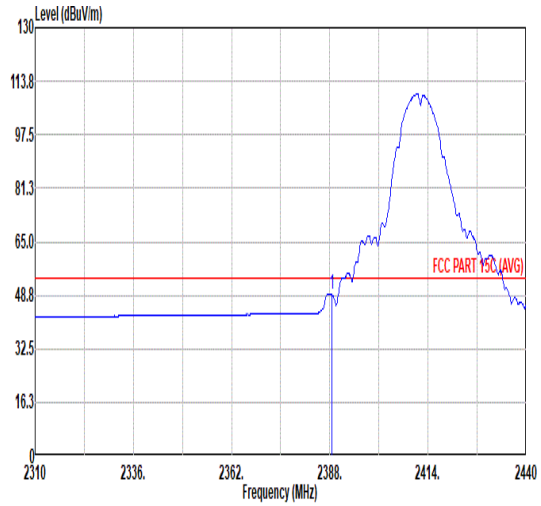	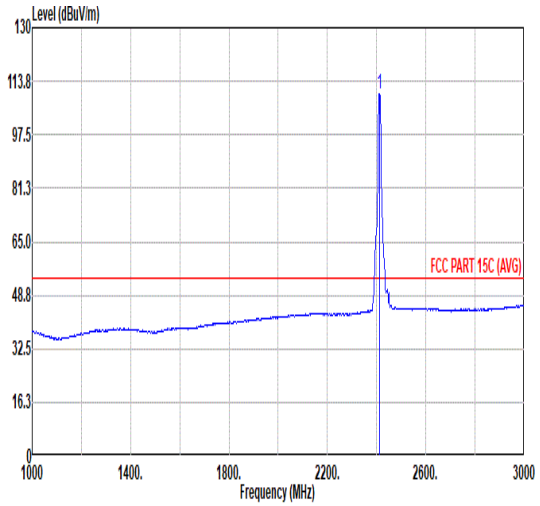

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2388.00	58.42	74.00	-15.58	45.54	32.46	6.60	32.18	6.00	100	305	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2412.00	114.42	------	------	101.43	32.55	6.63	32.19	6.00	100	305	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2388.52	49.08	54.00	-4.92	36.20	32.46	6.60	32.18	6.00	100	305	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2412.00	109.98	------	------	96.99	32.55	6.63	32.19	6.00	100	305	AVERAGE

Mode	1
	Harmonic
	2400-2483.5_802.11b_CH01_2412MHz
ANT	CDD 6+3

Pol.	Horizontal	Vertical
Peak Avg	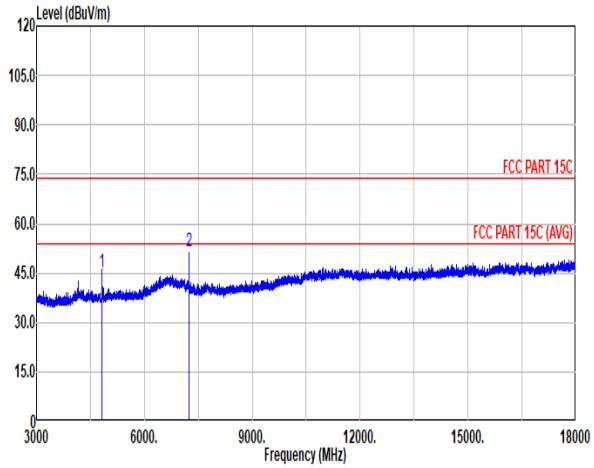	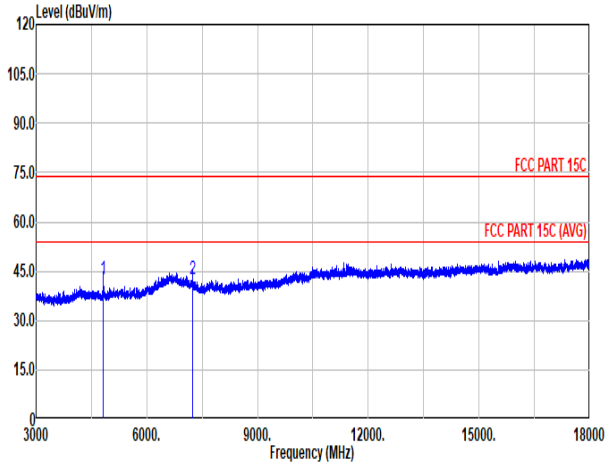

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4824.00	45.12	74.00	-28.88	67.39	34.20	9.47	65.94	0.00	---	---	PEAK
2	7236.00	51.76	93.23	-41.47	69.44	35.60	11.66	64.94	0.00	---	---	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4824.00	42.48	74.00	-31.52	64.75	34.20	9.47	65.94	0.00	---	---	PEAK
2	7236.00	42.58	86.29	-43.71	60.26	35.60	11.66	64.94	0.00	---	---	PEAK

Note: The Remark #2 is non-restricted frequency which limit is 100kHz-PSD(Radiated) down 20dB

Mode	2	
	Harmonic	
	2400-2483.5_802.11b_CH06_2437MHz	
ANT	CDD 6+3	
Pol.	Horizontal	Vertical
Peak Avg	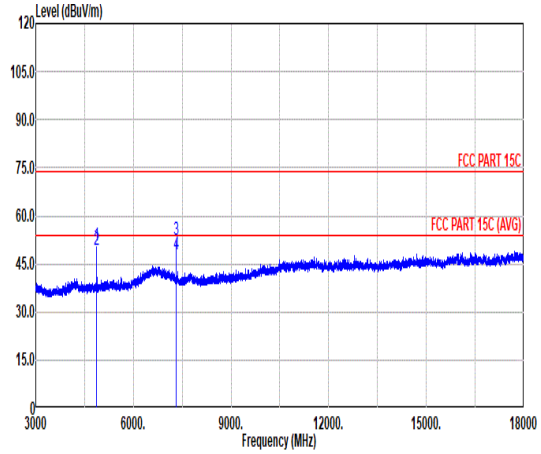	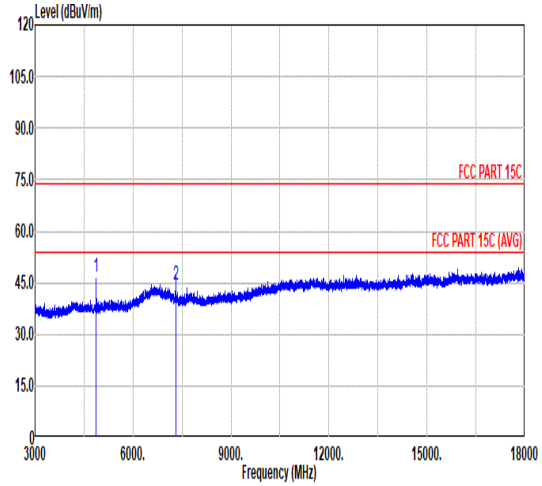

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4874.00	50.90	74.00	-23.10	73.10	34.15	9.52	65.87	0.00	107	22	PEAK
2	4874.00	49.18	54.00	-4.82	71.38	34.15	9.52	65.87	0.00	107	22	AVERAGE
3	7311.00	52.40	74.00	-21.60	70.18	35.70	11.69	65.17	0.00	100	311	PEAK
4	7311.00	48.05	54.00	-5.95	65.83	35.70	11.69	65.17	0.00	100	311	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4874.00	46.79	74.00	-27.21	68.99	34.15	9.52	65.87	0.00	---	---	PEAK
2	7311.00	44.28	74.00	-29.72	62.06	35.70	11.69	65.17	0.00	---	---	PEAK

Mode	3	
	Band Edge	
	2400-2483.5_802.11b_CH11_2462MHz	
ANT	CDD 6+3	
Pol.	Horizontal	Fundamental
Peak	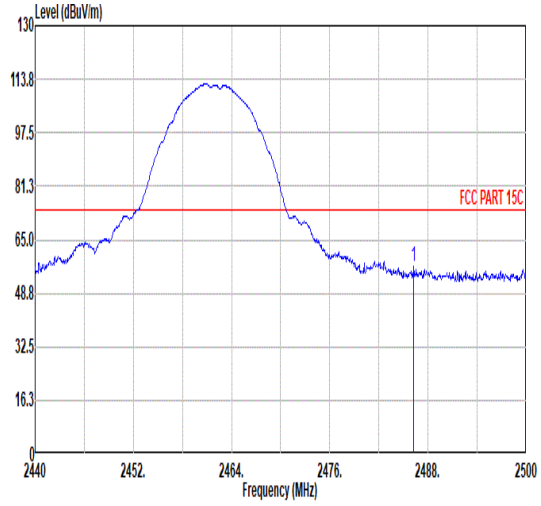	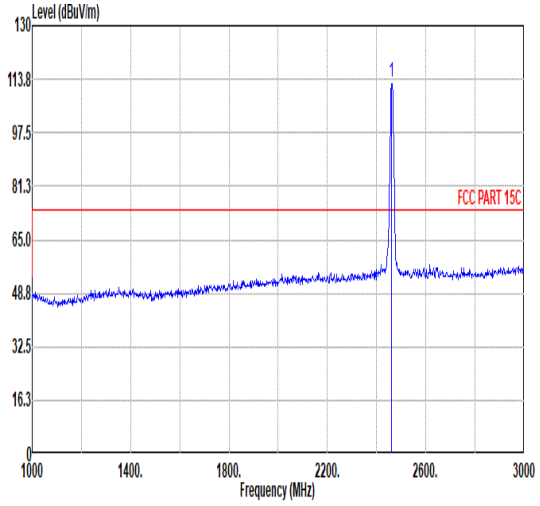
Avg	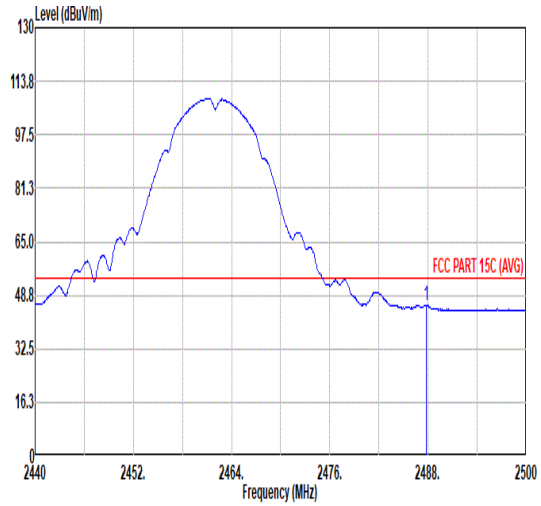	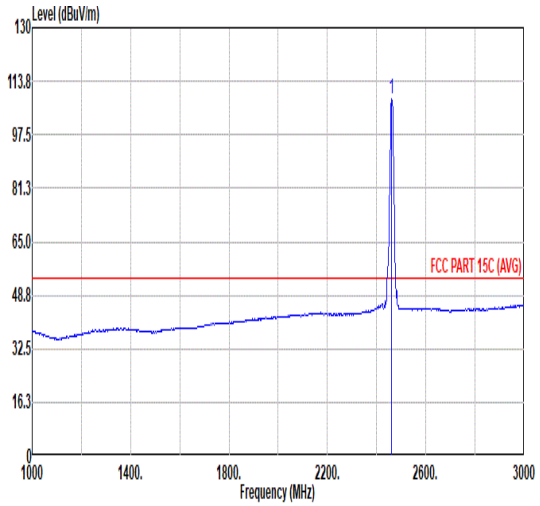

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2486.26	56.67	74.00	-17.33	43.55	32.62	6.74	32.24	6.00	281	325	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2462.00	112.66	------	------	99.71	32.47	6.70	32.22	6.00	281	325	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2487.82	45.70	54.00	-8.30	32.57	32.63	6.74	32.24	6.00	281	325	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2462.00	108.57	------	------	95.62	32.47	6.70	32.22	6.00	281	325	AVERAGE

Mode	3	
	Band Edge	
	2400-2483.5_802.11b_CH11_2462MHz	
ANT	CDD 6+3	
Pol.	Vertical	Fundamental
Peak	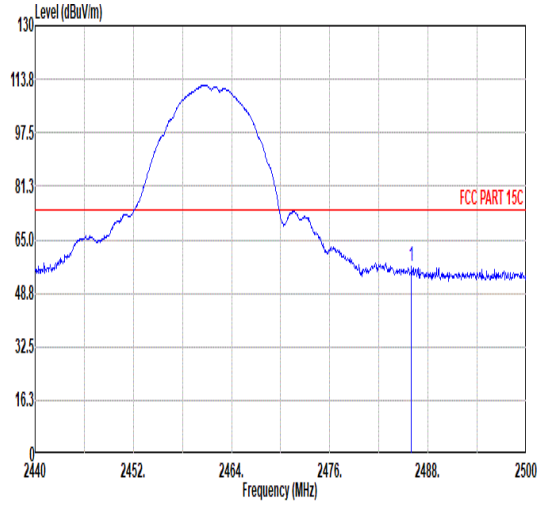	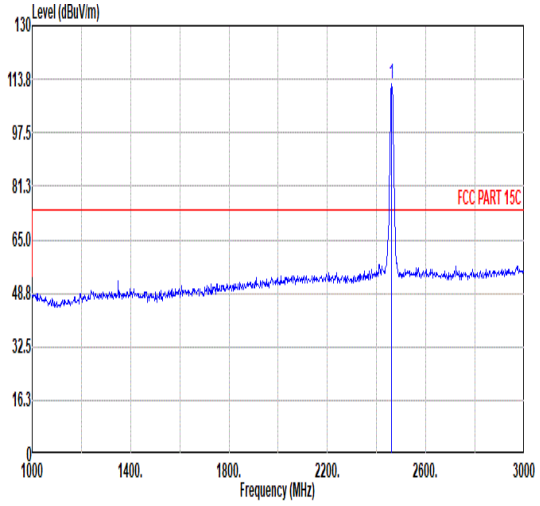
Avg	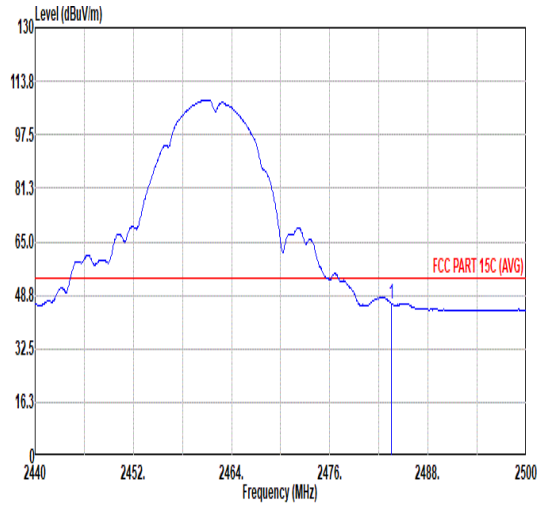	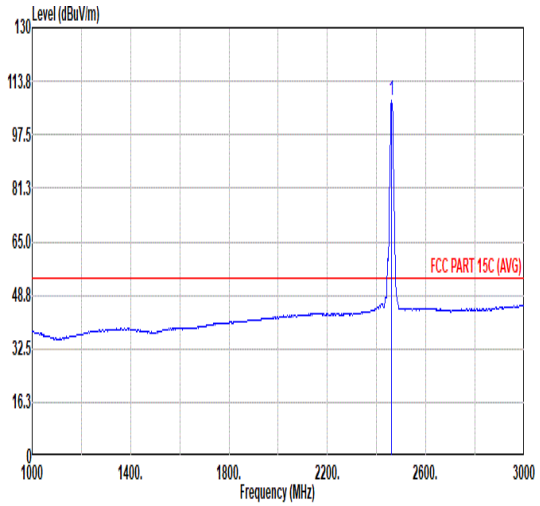

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2485.96	56.91	74.00	-17.09	43.79	32.62	6.74	32.24	6.00	100	237	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2462.00	112.57	------	------	99.62	32.47	6.70	32.22	6.00	100	237	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2483.50	46.34	54.00	-7.66	33.24	32.60	6.73	32.23	6.00	100	237	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2462.00	108.06	------	------	95.11	32.47	6.70	32.22	6.00	100	237	AVERAGE

Mode	3
	Harmonic
	2400-2483.5_802.11b_CH11_2462MHz
ANT	CDD 6+3

Pol.	Horizontal	Vertical
Peak Avg	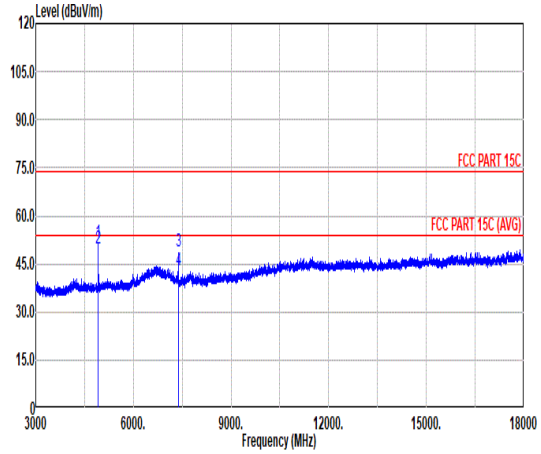	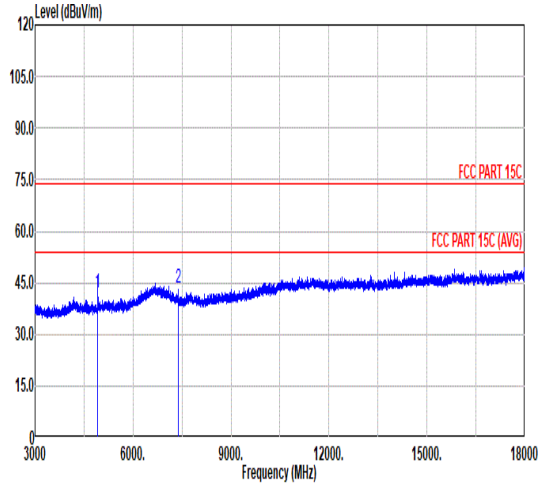

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4924.00	51.66	74.00	-22.34	73.84	34.05	9.57	65.80	0.00	300	36	PEAK
2	4924.00	49.79	54.00	-4.21	71.97	34.05	9.57	65.80	0.00	300	36	AVERAGE
3	7386.00	49.01	74.00	-24.99	66.99	35.70	11.72	65.40	0.00	300	36	PEAK
4	7386.00	43.05	54.00	-10.95	61.03	35.70	11.72	65.40	0.00	300	36	AVERAGE

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4924.00	42.22	74.00	-31.78	64.40	34.05	9.57	65.80	0.00	---	---	PEAK
2	7386.00	43.57	74.00	-30.43	61.55	35.70	11.72	65.40	0.00	---	---	PEAK

Mode	4	
	Band Edge	
	2400-2483.5_802.11g_CH01_2412MHz	
ANT	CDD 6+3	
Pol.	Horizontal	Fundamental
Peak	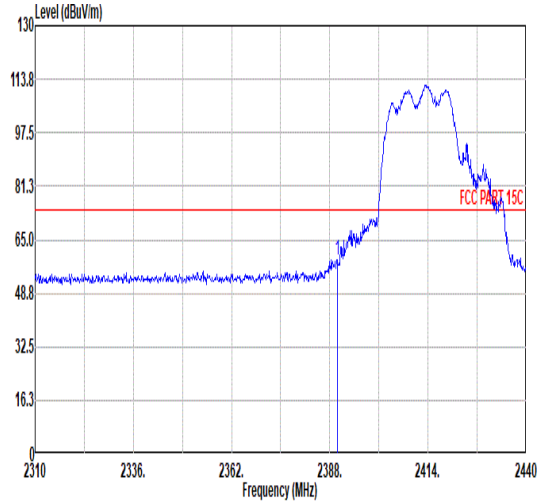	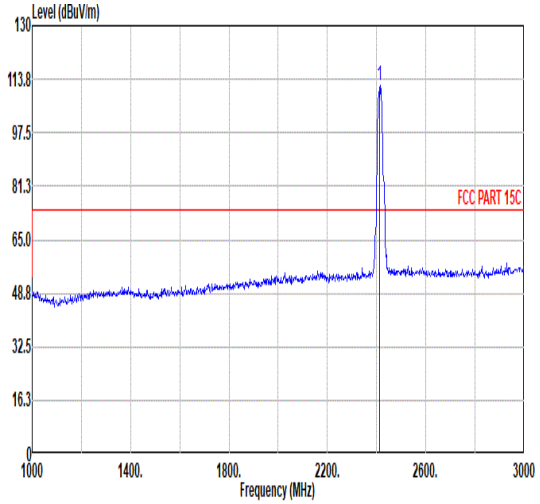
Avg	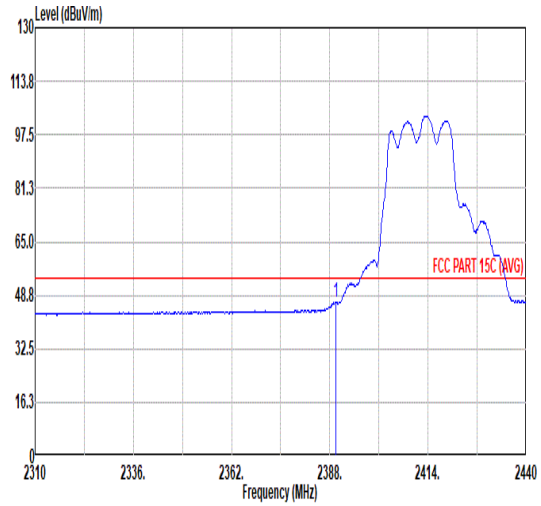	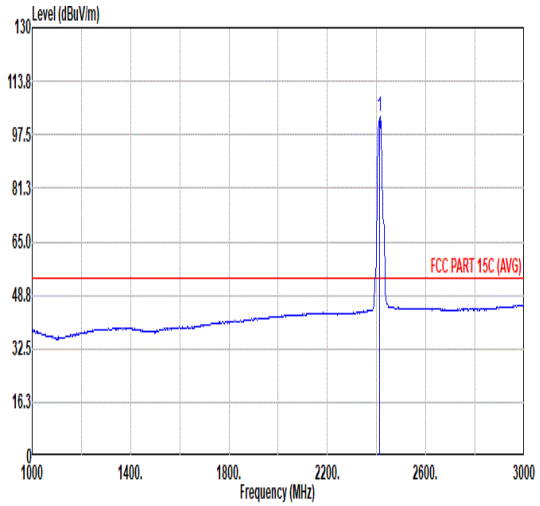

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.95	58.88	74.00	-15.12	45.98	32.48	6.60	32.18	6.00	245	360	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2412.00	111.74	------	------	98.75	32.54	6.64	32.19	6.00	245	360	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.69	46.75	54.00	-7.25	33.85	32.48	6.60	32.18	6.00	245	360	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2412.00	103.05	------	------	90.06	32.54	6.64	32.19	6.00	245	360	AVERAGE

Mode	4	
	Band Edge	
	2400-2483.5_802.11g_CH01_2412MHz	
ANT	CDD 6+3	
Pol.	Vertical	Fundamental
Peak	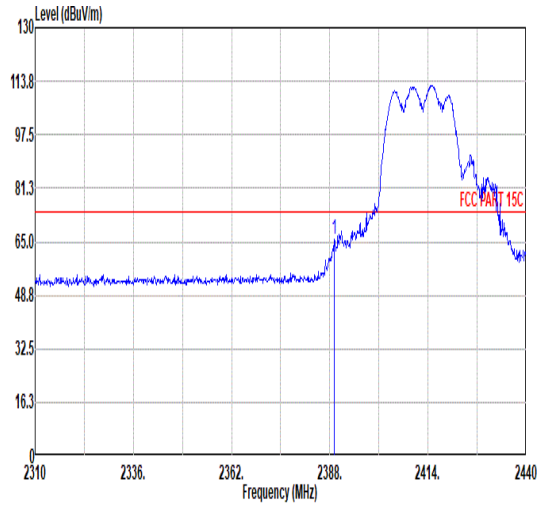	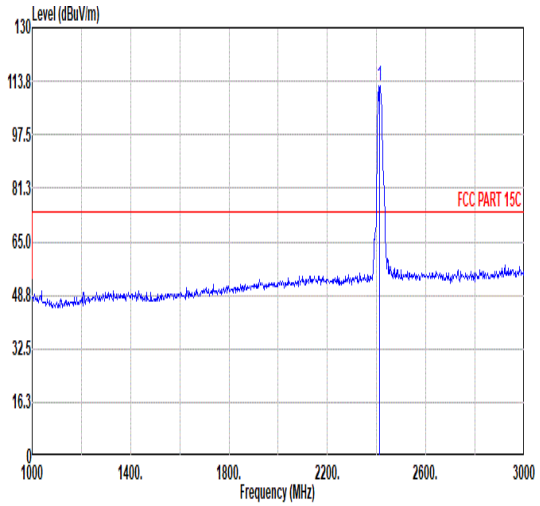
Avg	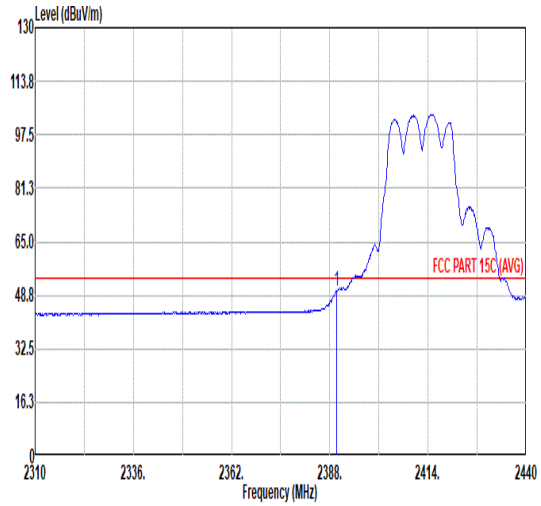	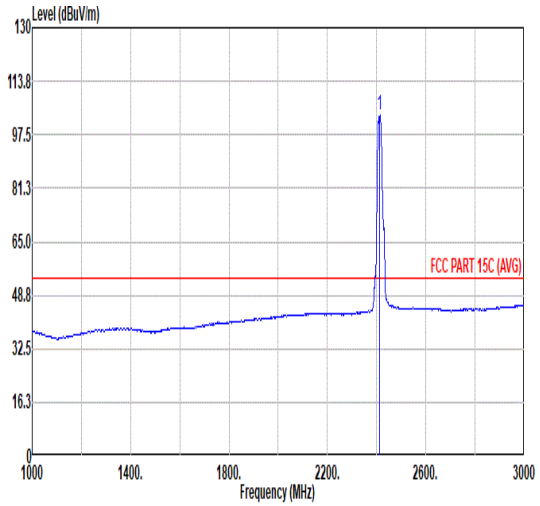

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.17	65.70	74.00	-8.30	52.81	32.47	6.60	32.18	6.00	127	294	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2412.00	112.25	------	------	99.25	32.56	6.63	32.19	6.00	127	294	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.82	50.13	54.00	-3.87	37.23	32.48	6.60	32.18	6.00	127	294	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2412.00	103.54	------	------	90.55	32.54	6.64	32.19	6.00	127	294	AVERAGE

Mode	4
	Harmonic
	2400-2483.5_802.11g_CH01_2412MHz
ANT	CDD 6+3

Pol.	Horizontal	Vertical
Peak Avg	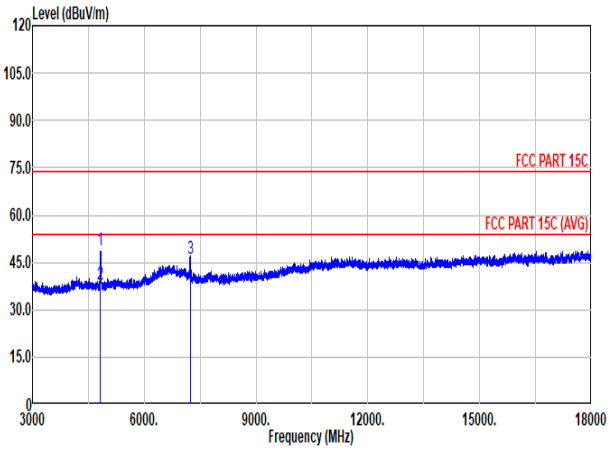	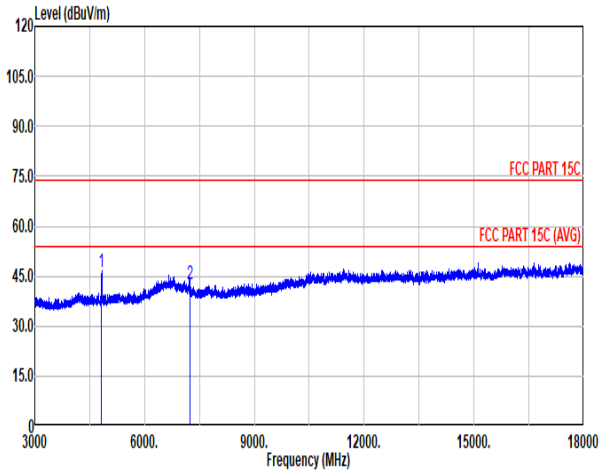

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4824.00	48.78	74.00	-25.22	71.05	34.20	9.47	65.94	0.00	300	0	PEAK
2	4824.00	38.00	54.00	-16.00	60.27	34.20	9.47	65.94	0.00	300	0	AVERAGE
3	7236.00	46.28	88.23	-41.95	63.96	35.60	11.66	64.94	0.00	---	---	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4824.00	45.98	74.00	-28.02	68.25	34.20	9.47	65.94	0.00	---	---	PEAK
2	7236.00	42.72	90.35	-47.63	60.40	35.60	11.66	64.94	0.00	---	---	PEAK

Note: The Remark #3(Horizontal), #2 (Vertical) is non-restricted frequency which limit is 100kHz-PSD(Radiated) down 20dB

Mode	5
	Harmonic
	2400-2483.5_802.11g_CH06_2437MHz
ANT	CDD 6+3

Pol.	Horizontal	Vertical
Peak Avg	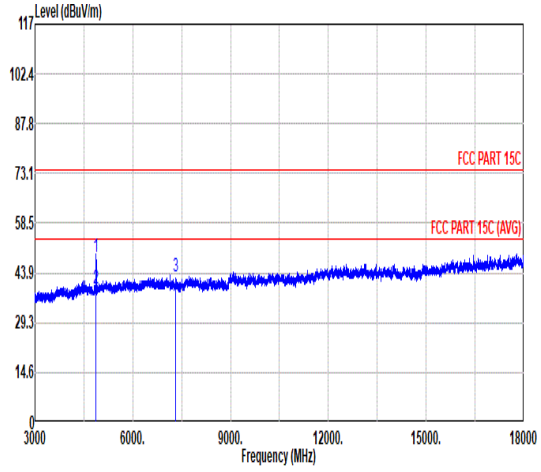	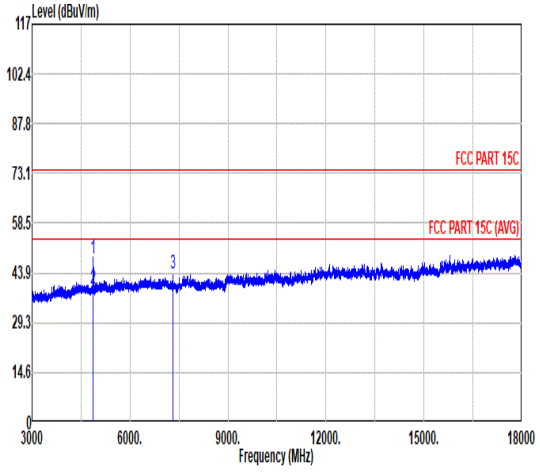

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4874.00	48.76	74.00	-25.24	68.00	33.90	10.34	63.48	0.00	300	360	PEAK
2	4874.00	39.11	54.00	-14.89	58.35	33.90	10.34	63.48	0.00	300	360	AVERAGE
3	7311.00	42.61	74.00	-31.39	57.91	35.59	12.78	63.67	0.00	---	---	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4874.00	48.25	74.00	-25.75	67.49	33.90	10.34	63.48	0.00	100	360	PEAK
2	4874.00	39.17	54.00	-14.83	58.41	33.90	10.34	63.48	0.00	100	360	AVERAGE
3	7311.00	43.56	74.00	-30.44	58.86	35.59	12.78	63.67	0.00	---	---	PEAK

Mode	6	
	Band Edge	
	2400-2483.5_802.11g_CH11_2462MHz	
ANT	CDD 6+3	
Pol.	Horizontal	Fundamental
Peak	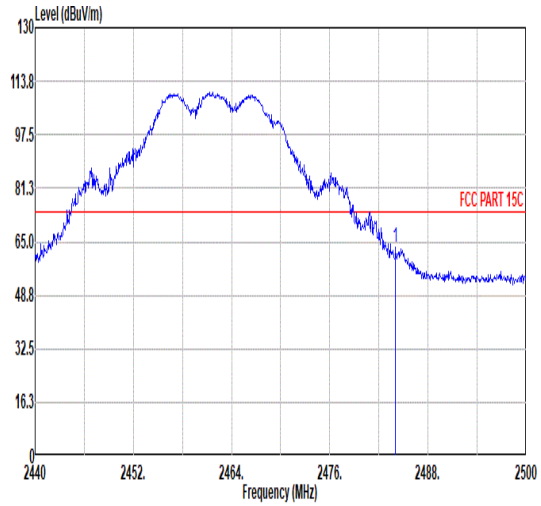	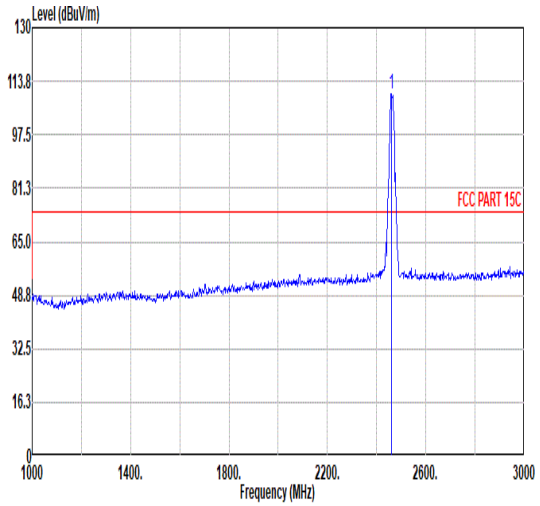
Avg	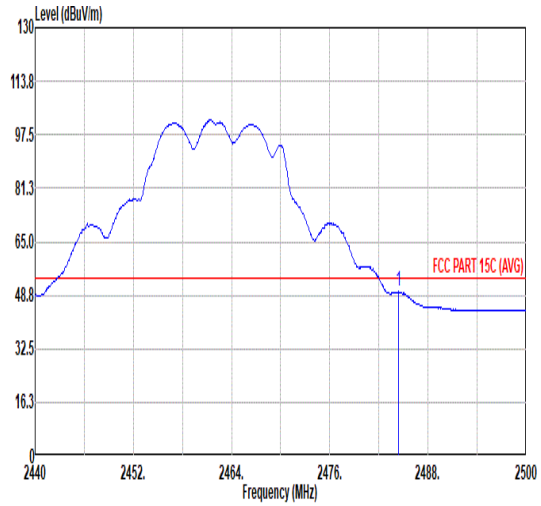	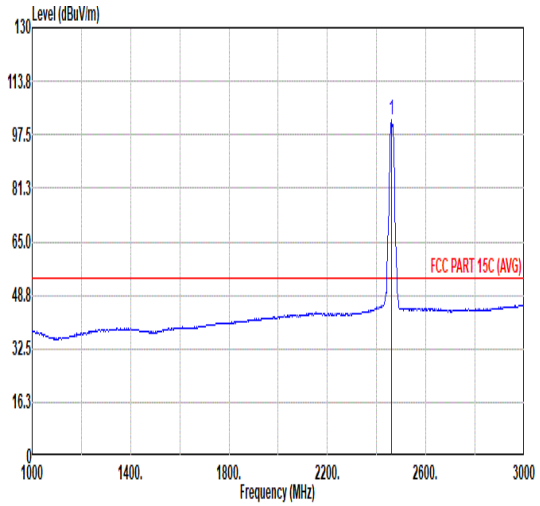

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2484.04	63.28	74.00	-10.72	50.18	32.60	6.73	32.23	6.00	305	339	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2462.00	109.95	------	------	97.00	32.47	6.70	32.22	6.00	305	339	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2484.40	49.94	54.00	-4.06	36.83	32.61	6.73	32.23	6.00	305	339	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2462.00	101.85	------	------	88.90	32.47	6.70	32.22	6.00	305	339	AVERAGE

Mode	6	
	Band Edge	
	2400-2483.5_802.11g_CH11_2462MHz	
ANT	CDD 6+3	
Pol.	Vertical	Fundamental

Peak

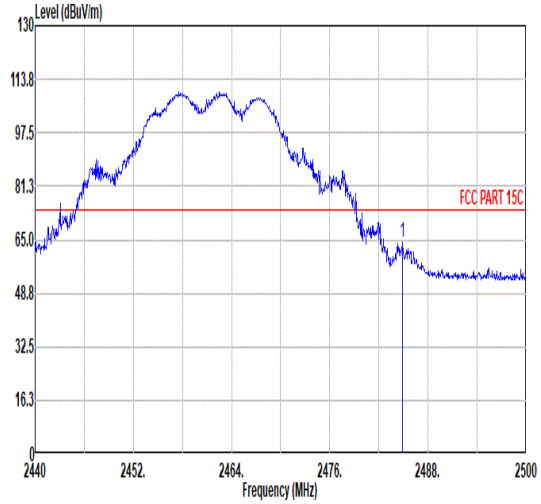

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2484.88	64.40	74.00	-9.60	51.29	32.61	6.73	32.23	6.00	100	232	PEAK

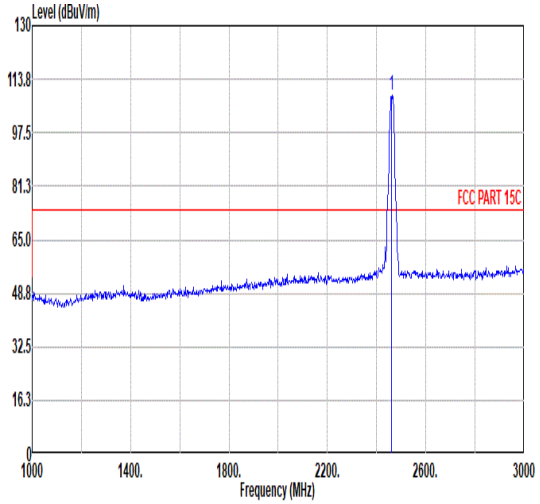

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2462.00	108.84	------	------	95.87	32.48	6.71	32.22	6.00	100	232	PEAK

Avg

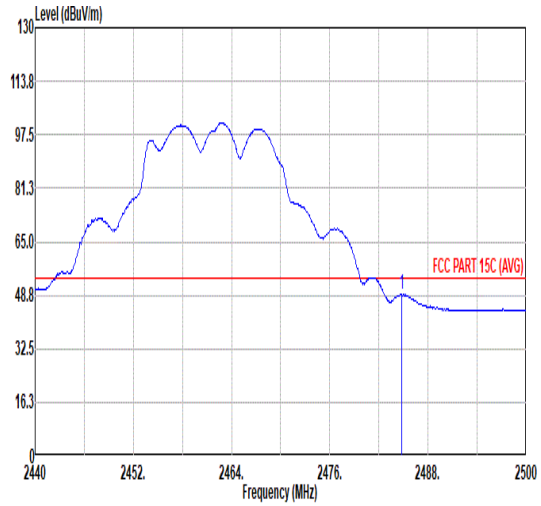

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2484.76	49.22	54.00	-4.78	36.11	32.61	6.73	32.23	6.00	100	232	AVERAGE

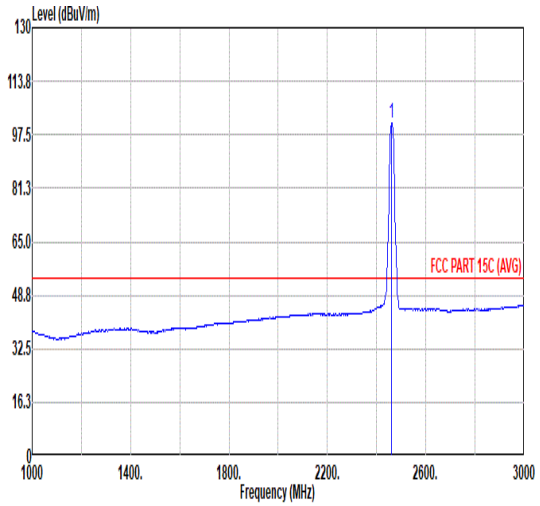

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2462.00	101.01	------	------	88.06	32.47	6.70	32.22	6.00	100	232	AVERAGE

Mode	6
	Harmonic
	2400-2483.5_802.11g_CH11_2462MHz
ANT	CDD 6+3

Pol.	Horizontal	Vertical

Peak

Avg

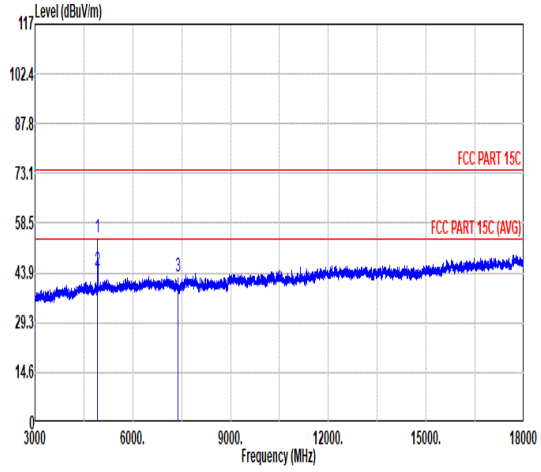

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4924.00	54.51	74.00	-19.49	73.69	33.90	10.40	63.48	0.00	305	202	PEAK
2	4924.00	44.66	54.00	-9.34	63.84	33.90	10.40	63.48	0.00	305	202	AVERAGE
3	7386.00	42.84	74.00	-31.16	58.17	35.51	12.88	63.72	0.00	---	---	PEAK

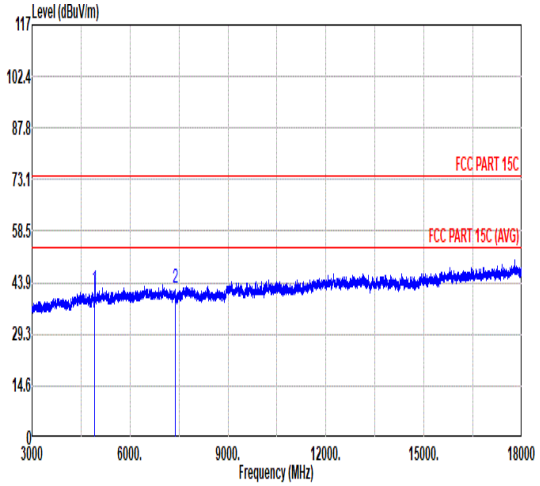

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4924.00	41.97	74.00	-32.03	61.15	33.90	10.40	63.48	0.00	---	---	PEAK
2	7386.00	42.48	74.00	-31.52	57.81	35.51	12.88	63.72	0.00	---	---	PEAK

Mode	7	
	Band Edge	
	2400-2483.5_802.11ax HE20_CH01_Full RU _2412MHz	
ANT	CDD 6+3	
Pol.	Horizontal	Fundamental
Peak	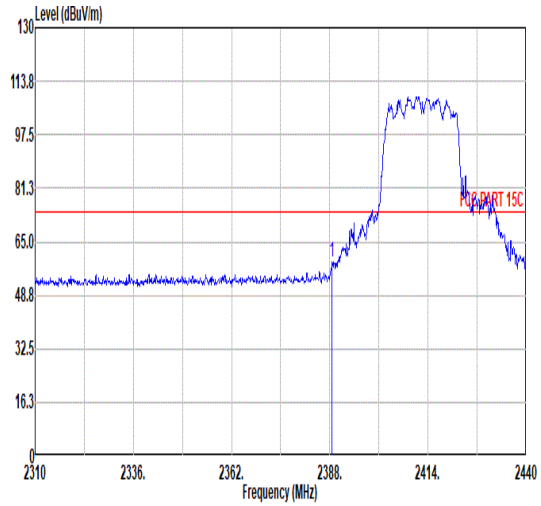	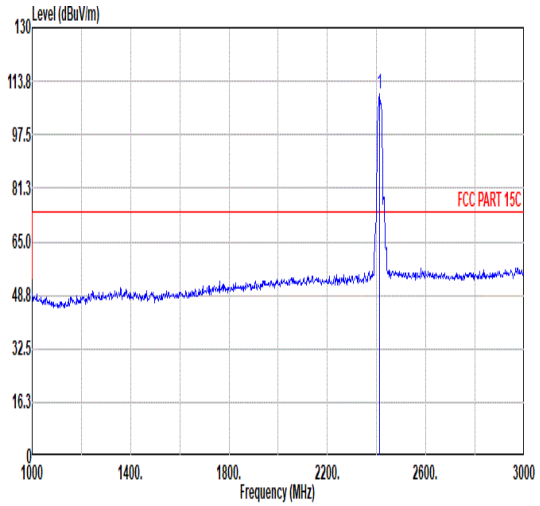
Avg	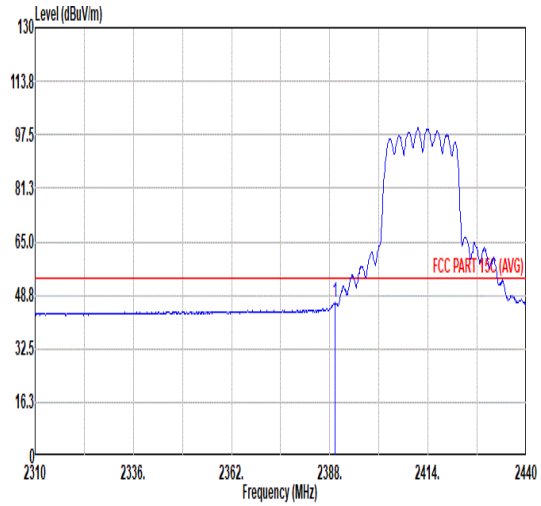	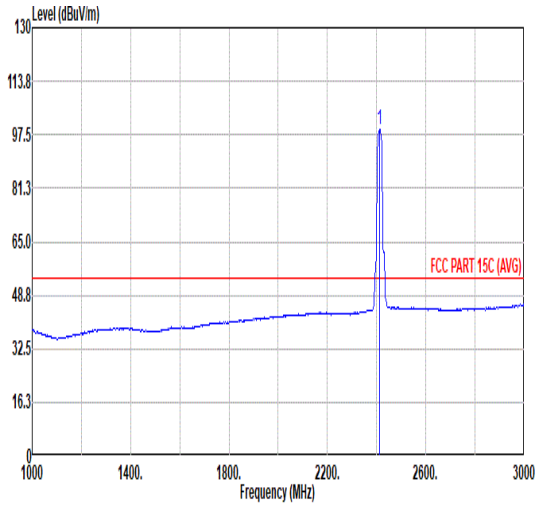

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2388.65	58.94	74.00	-15.06	46.06	32.46	6.60	32.18	6.00	244	0	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2412.00	109.77	------	------	96.78	32.55	6.63	32.19	6.00	244	0	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.30	46.41	54.00	-7.59	33.52	32.47	6.60	32.18	6.00	244	0	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2412.00	99.17	------	------	86.18	32.54	6.64	32.19	6.00	244	0	AVERAGE

Mode	7	
	Band Edge	
	2400-2483.5_802.11ax HE20_CH01_Full RU _2412MHz	
ANT	CDD 6+3	
Pol.	Vertical	Fundamental
Peak	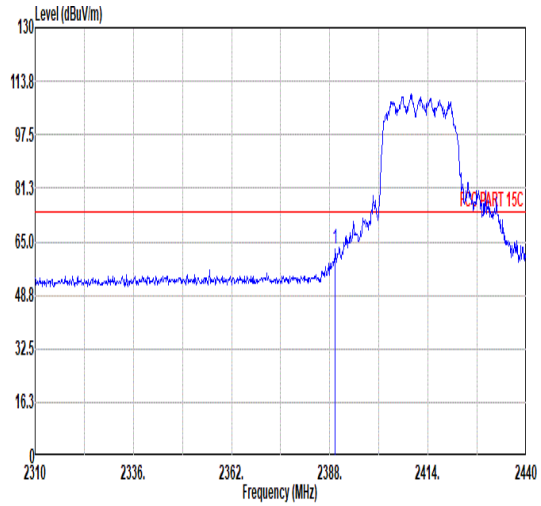	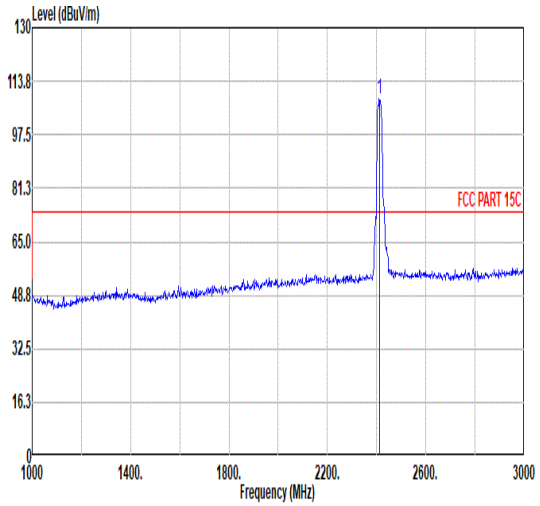
Avg	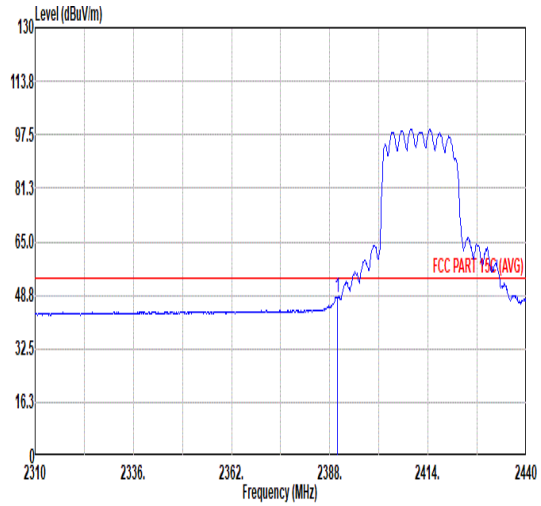	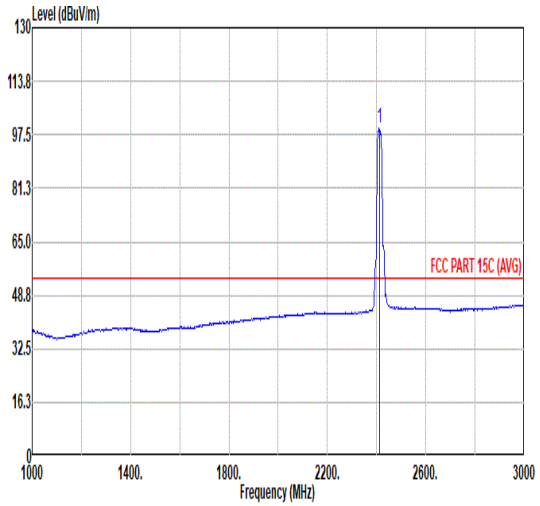

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.43	62.68	74.00	-11.32	49.79	32.47	6.60	32.18	6.00	100	320	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2412.00	108.40	------	------	95.40	32.56	6.63	32.19	6.00	100	320	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.95	48.32	54.00	-5.68	35.42	32.48	6.60	32.18	6.00	100	320	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2412.00	99.37	------	------	86.37	32.56	6.63	32.19	6.00	100	320	AVERAGE

Mode	7	
	Harmonic	
	2400-2483.5_802.11ax HE20_CH01_Full RU _2412MHz	
ANT	CDD 6+3	
Pol.	Horizontal	Vertical
Peak Avg	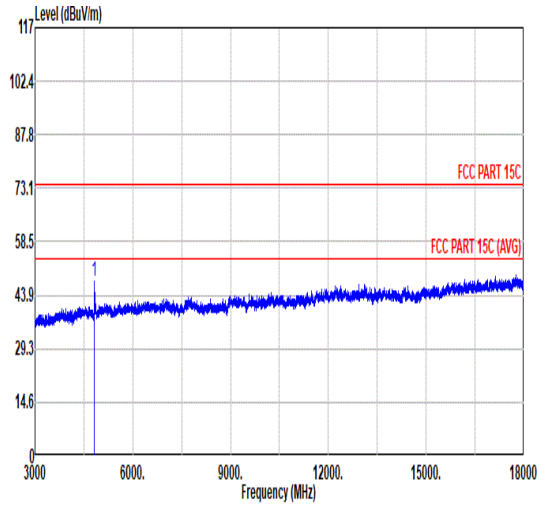 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4824.00 47.80 74.00 -26.20 67.09 33.90 10.29 63.48 0.00 --- --- PEAK	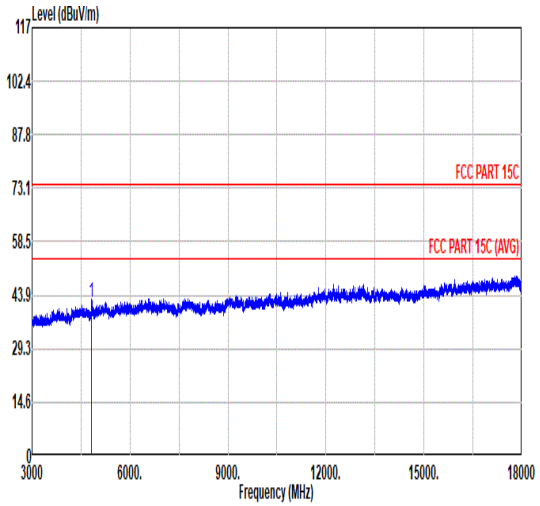 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4824.00 42.14 74.00 -31.86 61.43 33.90 10.29 63.48 0.00 --- --- PEAK

Mode	8
	Harmonic
	2400-2483.5_802.11ax HE20_CH06_Full RU _2437MHz
ANT	CDD 6+3

Pol.	Horizontal	Vertical
Peak Avg	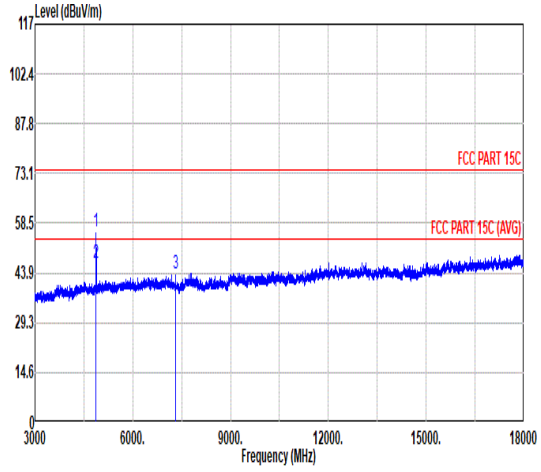	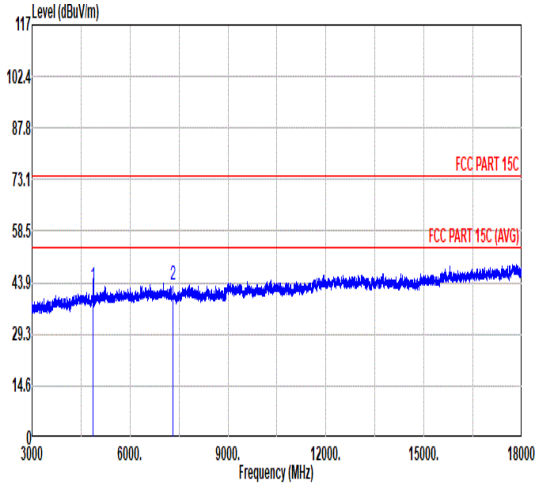

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4874.00	56.03	74.00	-17.97	75.27	33.90	10.34	63.48	0.00	304	202	PEAK
2	4874.00	46.62	54.00	-7.38	65.86	33.90	10.34	63.48	0.00	304	202	AVERAGE
3	7311.00	43.82	74.00	-30.18	59.12	35.59	12.78	63.67	0.00	---	---	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4874.00	42.68	74.00	-31.32	61.92	33.90	10.34	63.48	0.00	---	---	PEAK
2	7311.00	43.19	74.00	-30.81	58.49	35.59	12.78	63.67	0.00	---	---	PEAK

Mode	9	
	Band Edge	
	2400-2483.5_802.11ax HE20_CH11_Full RU _2462MHz	
ANT	CDD 6+3	
Pol.	Horizontal	Fundamental
Peak	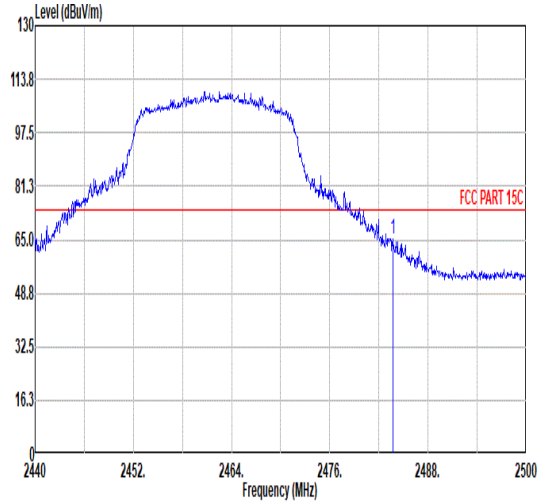	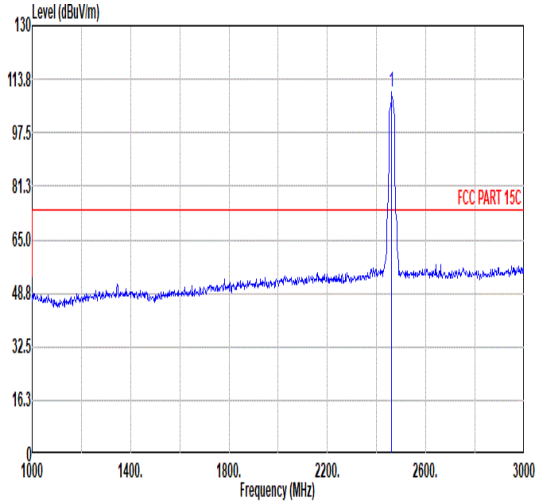
Avg	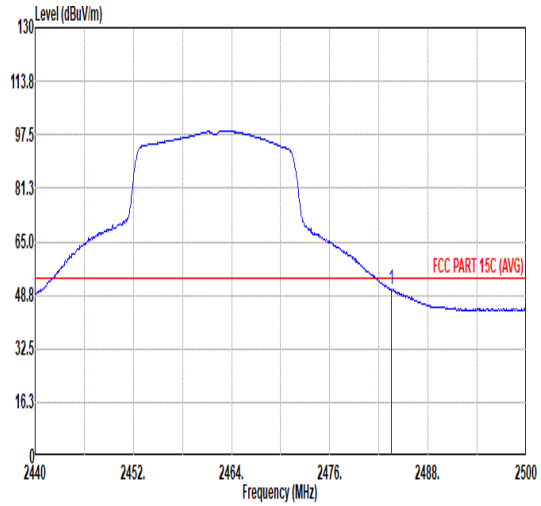	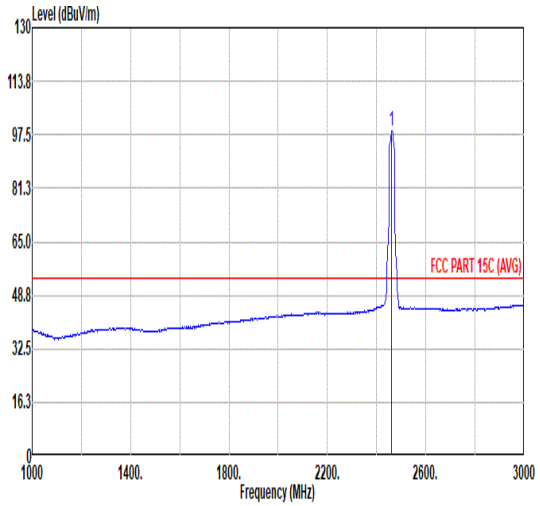

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2483.68	65.17	74.00	-8.83	52.07	32.60	6.73	32.23	6.00	213	338	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2462.00	109.92	------	------	96.97	32.47	6.70	32.22	6.00	213	338	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2483.56	50.48	54.00	-3.52	37.38	32.60	6.73	32.23	6.00	213	338	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2462.00	98.74	------	------	85.79	32.47	6.70	32.22	6.00	213	338	AVERAGE

Mode	9	
	Band Edge	
	2400-2483.5_802.11ax HE20_CH11_Full RU _2462MHz	
ANT	CDD 6+3	
Pol.	Vertical	Fundamental
Peak	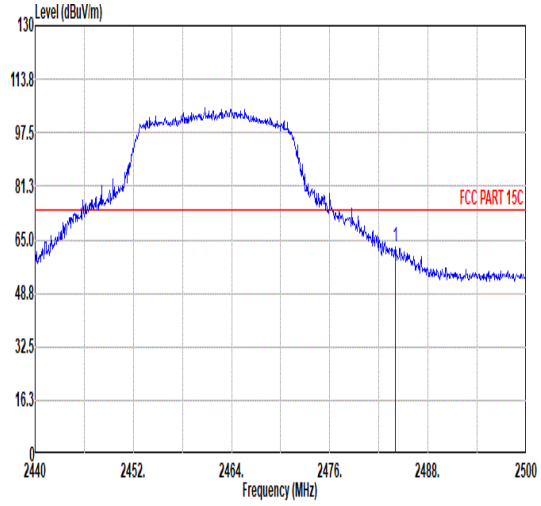 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2483.98 62.69 74.00 -11.31 49.59 32.60 6.73 32.23 6.00 100 235 PEAK	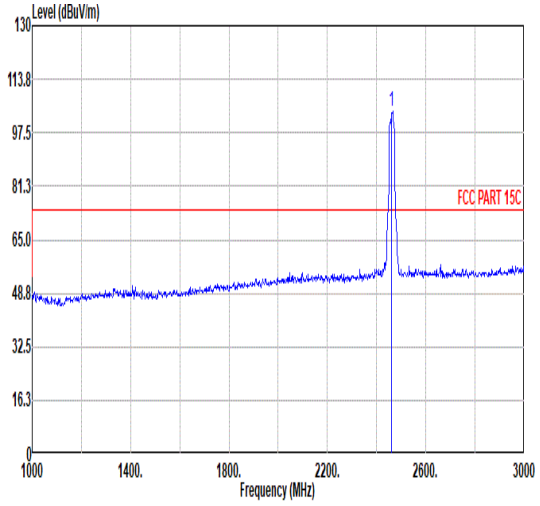 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2462.00 104.15 ------ ------ 91.16 32.50 6.71 32.22 6.00 100 235 PEAK
Avg	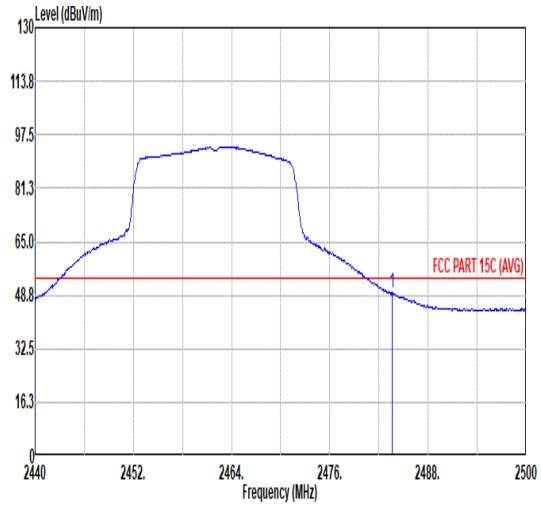 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2483.62 49.40 54.00 -4.60 36.30 32.60 6.73 32.23 6.00 100 235 AVERAGE	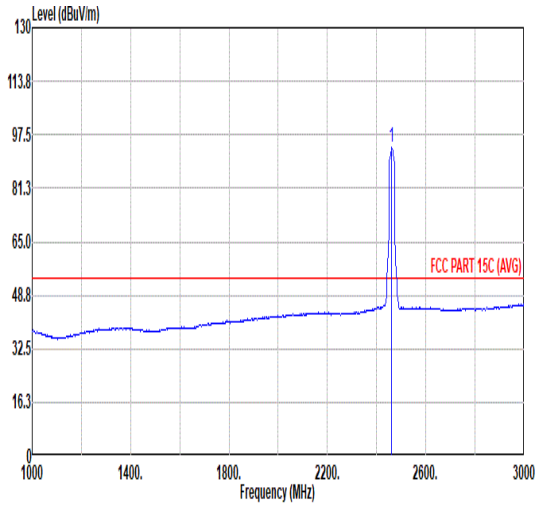 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2462.00 93.54 ------ ------ 80.59 32.47 6.70 32.22 6.00 100 235 AVERAGE

Mode	9
	Harmonic
	2400-2483.5_802.11ax HE20_CH11_Full RU _2462MHz
ANT	CDD 6+3

Pol.	Horizontal	Vertical
Peak Avg	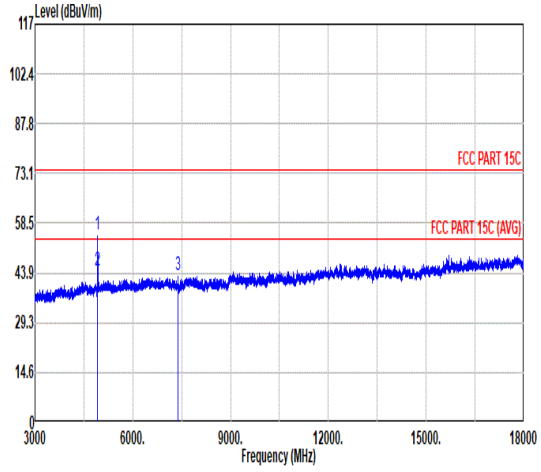	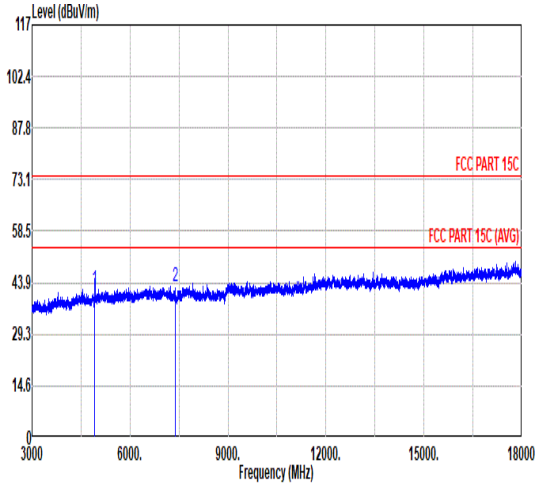

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4924.00	55.03	74.00	-18.97	74.21	33.90	10.40	63.48	0.00	323	203	PEAK
2	4924.00	44.53	54.00	-9.47	63.71	33.90	10.40	63.48	0.00	323	203	AVERAGE
3	7386.00	43.13	74.00	-30.87	58.46	35.51	12.88	63.72	0.00	---	---	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4924.00	41.89	74.00	-32.11	61.07	33.90	10.40	63.48	0.00	---	---	PEAK
2	7386.00	42.84	74.00	-31.16	58.17	35.51	12.88	63.72	0.00	---	---	PEAK

Mode	10	
	Band Edge - L	
	2400-2483.5_802.11ax HE40_CH03_Full RU _2422MHz	
ANT	CDD 6+3	
Pol.	Horizontal	Fundamental
Peak	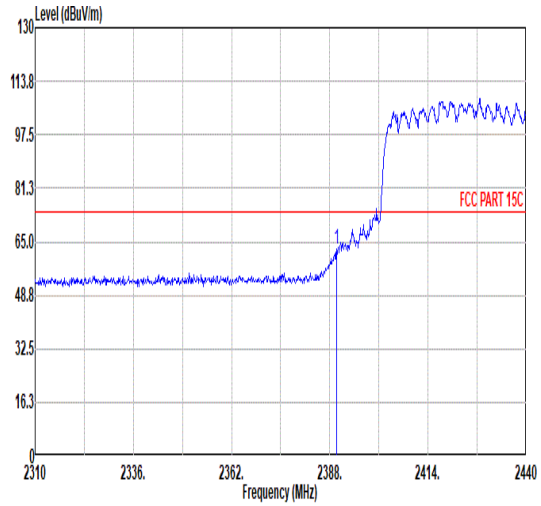	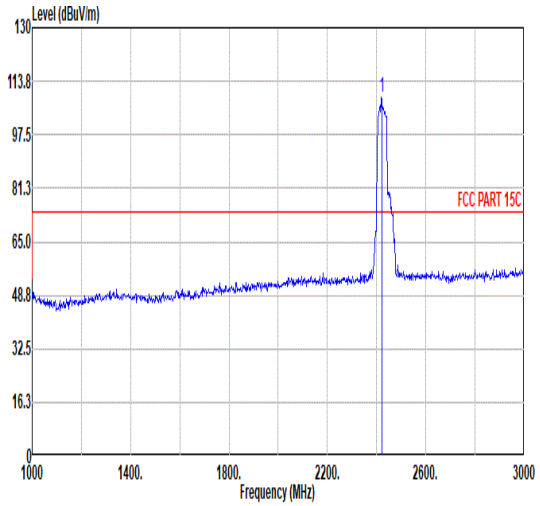
Avg	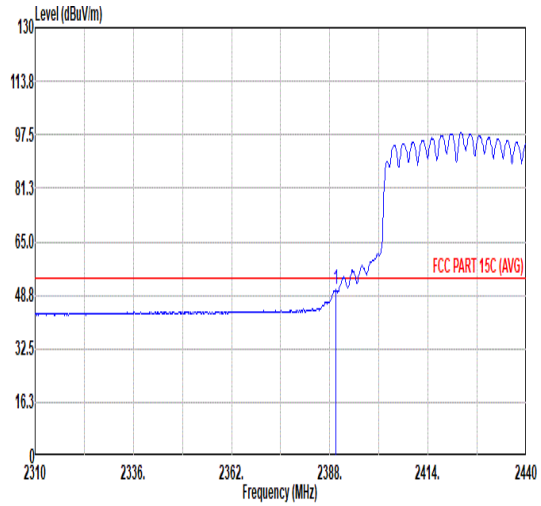	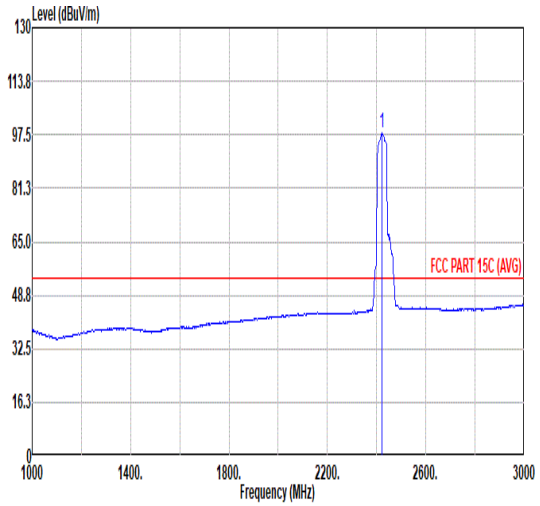

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.82	62.71	74.00	-11.29	49.81	32.48	6.60	32.18	6.00	236	0	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2422.00	108.81	------	------	95.83	32.53	6.64	32.19	6.00	236	0	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.56	50.53	54.00	-3.47	37.64	32.47	6.60	32.18	6.00	236	0	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2422.00	97.88	------	------	84.91	32.51	6.65	32.19	6.00	236	0	AVERAGE

Mode	10	
	Band Edge - R	
	2400-2483.5_802.11ax HE40_CH03_Full RU _2422MHz	
ANT	CDD 6+3	
Pol.	Horizontal	Fundamental
Peak	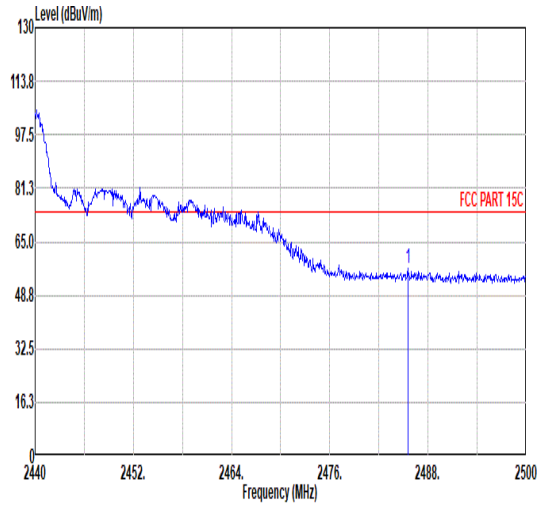 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2485.54 57.05 74.00 -16.95 43.93 32.61 6.74 32.23 6.00 236 0 PEAK	Blank
Avg	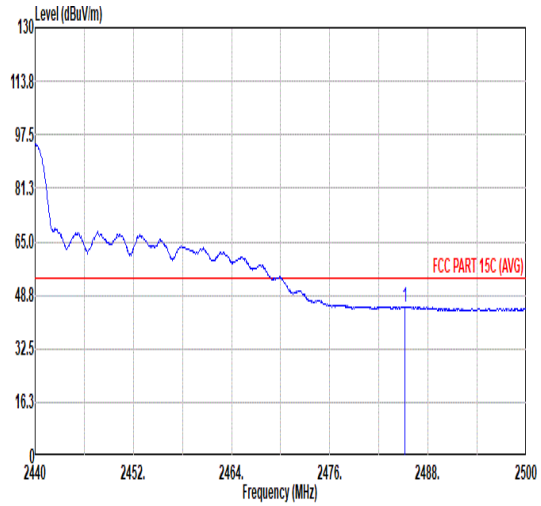 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2485.18 45.27 54.00 -8.73 32.15 32.61 6.74 32.23 6.00 236 0 AVERAGE	Blank

Mode	10	
	Band Edge - L	
	2400-2483.5_802.11ax HE40_CH03_Full RU _2422MHz	
ANT	CDD 6+3	
Pol.	Vertical	Fundamental
Peak	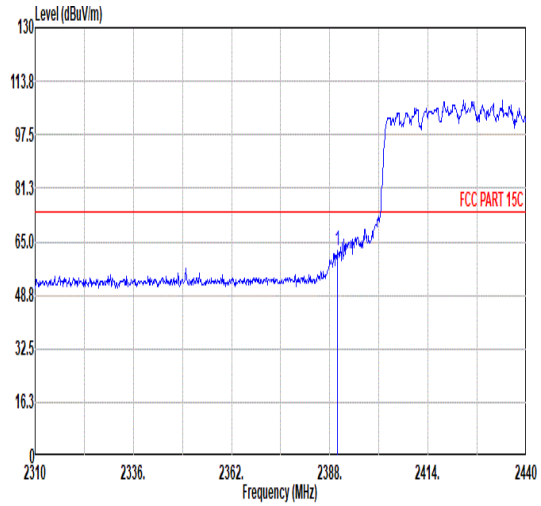	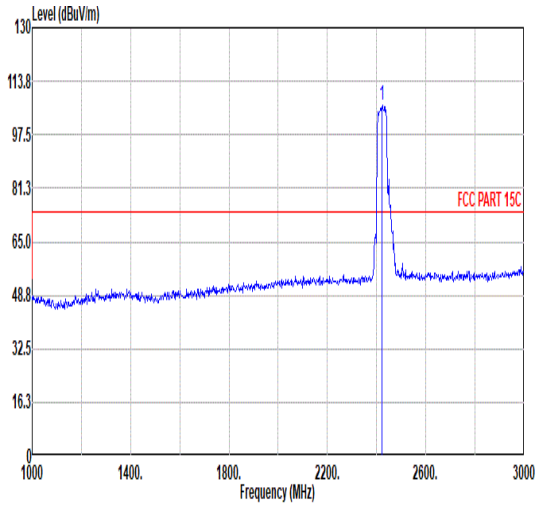
Avg	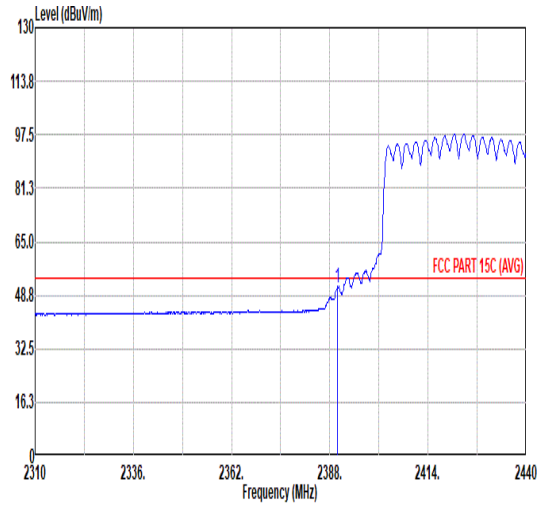	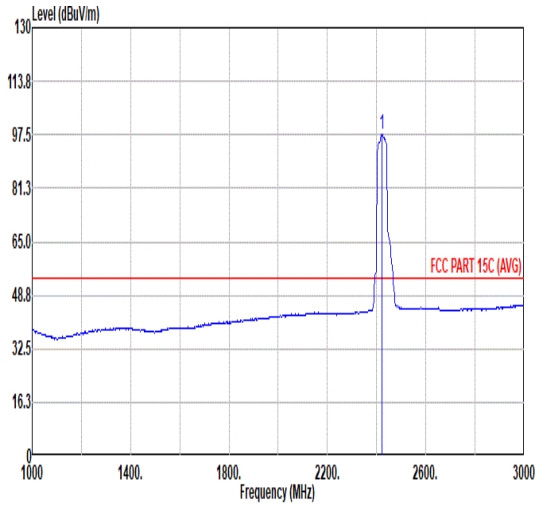

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.95	62.13	74.00	-11.87	49.23	32.48	6.60	32.18	6.00	102	232	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2422.00	106.63	------	------	93.68	32.50	6.65	32.20	6.00	102	232	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.95	50.89	54.00	-3.11	37.99	32.48	6.60	32.18	6.00	102	232	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2422.00	97.50	------	------	84.52	32.52	6.65	32.19	6.00	102	232	AVERAGE

Mode	10	
	Band Edge - R	
	2400-2483.5_802.11ax HE40_CH03_Full RU _2422MHz	
ANT	CDD 6+3	
Pol.	Vertical	Fundamental
Peak	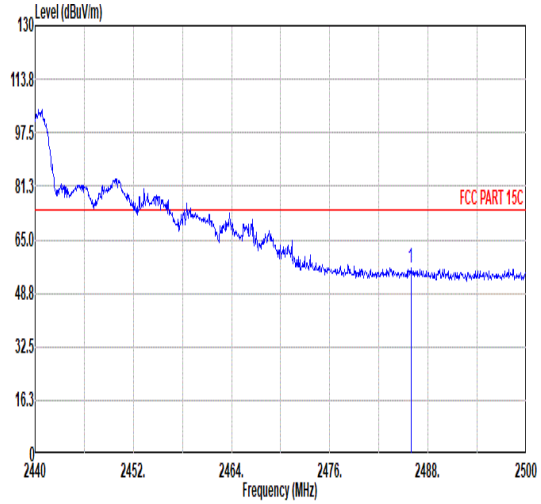	Blank
Avg	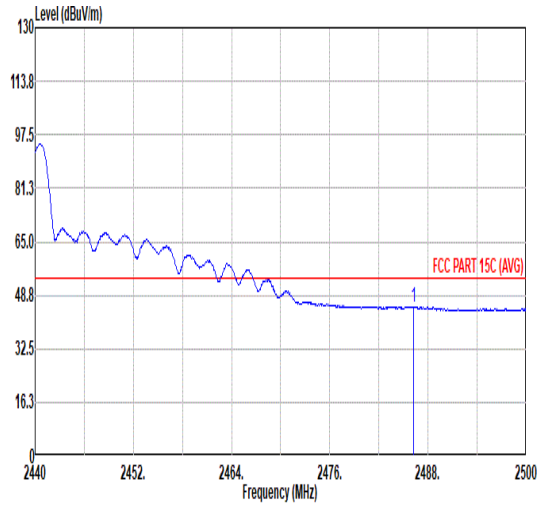	Blank

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2485.90	56.21	74.00	-17.79	43.09	32.62	6.74	32.24	6.00	102	232	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2486.20	45.35	54.00	-8.65	32.23	32.62	6.74	32.24	6.00	102	232	AVERAGE

Mode	10	
	Harmonic	
	2400-2483.5_802.11ax HE40_CH03_Full RU _2422MHz	
ANT	CDD 6+3	
Pol.	Horizontal	Vertical
Peak Avg	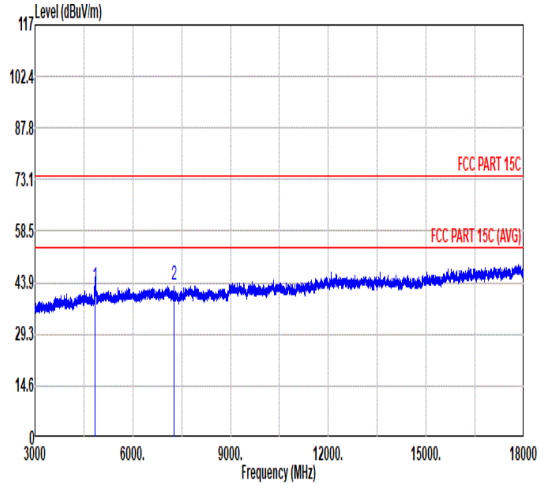 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4844.00 42.86 74.00 -31.14 62.13 33.90 10.31 63.48 0.00 --- --- PEAK 2 7266.00 43.23 74.00 -30.77 58.59 35.57 12.71 63.64 0.00 --- --- PEAK	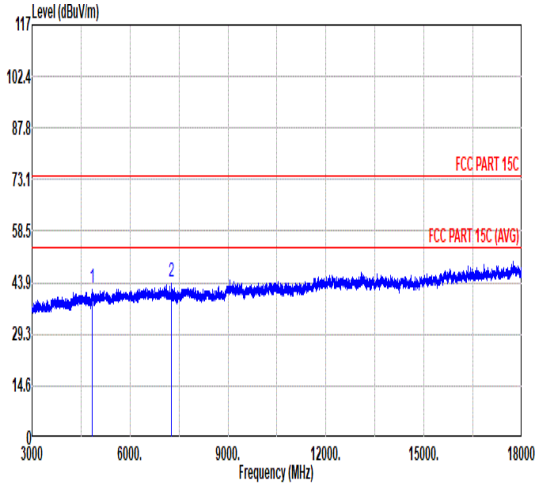 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4844.00 42.19 74.00 -31.81 61.46 33.90 10.31 63.48 0.00 --- --- PEAK 2 7266.00 44.01 74.00 -29.99 59.37 35.57 12.71 63.64 0.00 --- --- PEAK

Mode	10	
	18G-25G	
	2400-2483.5_802.11ax HE40_CH03_Full RU _2422MHz	
ANT	CDD 6+3	
Pol.	Horizontal	Vertical
Peak Avg	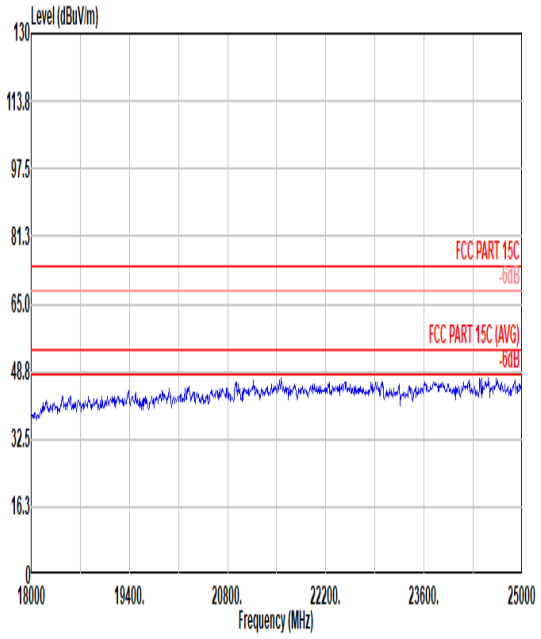	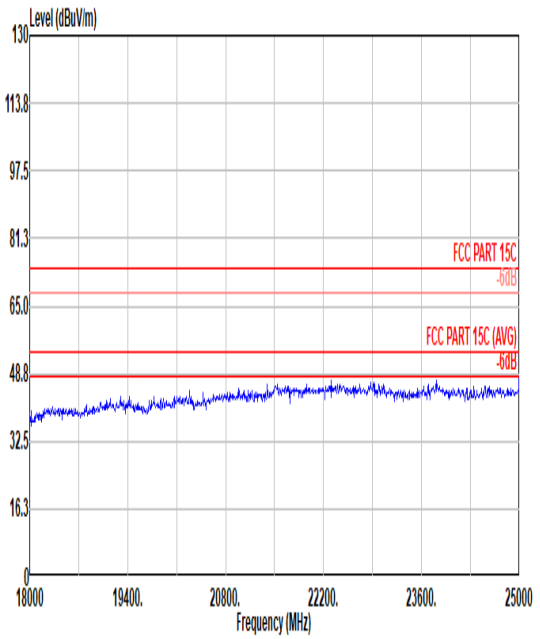

Mode	10
	LF
	2400-2483.5_802.11ax HE40_CH03_Full RU _2422MHz
ANT	CDD 6+3

Pol.	Horizontal	Vertical

Peak

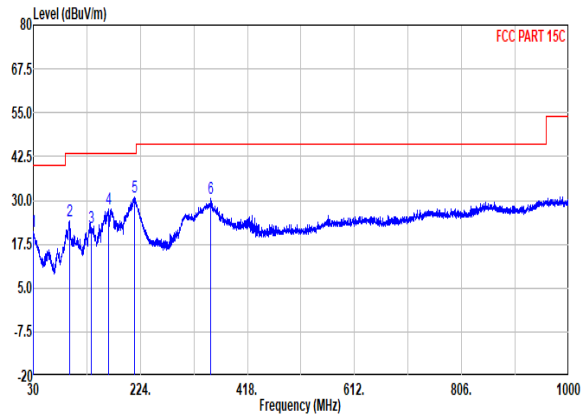

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	30.24	21.16	40.00	-18.84	27.52	25.02	0.83	32.21	0.00	---	---	Peak
2	96.20	24.05	43.50	-19.45	39.14	15.43	1.50	32.02	0.00	---	---	Peak
3	134.76	22.11	43.50	-21.39	34.91	17.50	1.76	32.06	0.00	---	---	Peak
4	166.29	27.45	43.50	-16.05	41.85	15.71	1.96	32.07	0.00	---	---	Peak
5	213.82	30.95	43.50	-12.55	45.77	14.98	2.22	32.02	0.00	---	---	Peak
6	351.07	30.41	46.00	-15.59	39.29	20.25	2.85	31.98	0.00	---	---	Peak

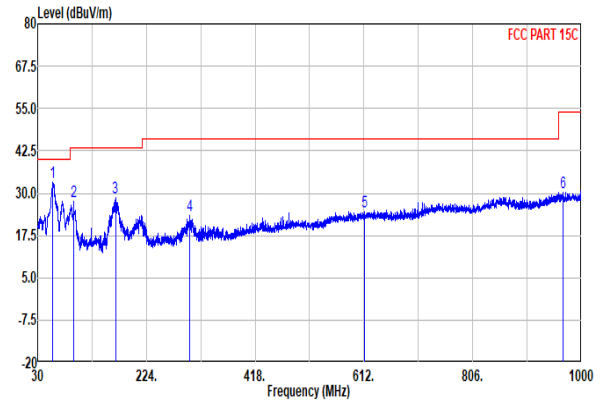

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	56.43	33.29	40.00	-6.71	52.06	12.16	1.14	32.07	0.00	---	---	Peak
2	94.75	27.46	43.50	-16.04	42.74	15.24	1.49	32.01	0.00	---	---	Peak
3	168.71	28.85	43.50	-14.65	43.44	15.51	1.97	32.07	0.00	---	---	Peak
4	301.36	23.32	46.00	-22.68	33.79	19.15	2.67	32.29	0.00	---	---	Peak
5	613.46	24.58	46.00	-21.42	26.92	25.87	3.78	31.99	0.00	---	---	Peak
6	967.02	30.31	54.00	-23.69	25.31	30.79	4.72	30.51	0.00	---	---	Peak

Mode	11	
	Band Edge - L	
	2400-2483.5_802.11ax HE40_CH06_Full RU _2437MHz	
ANT	CDD 6+3	
Pol.	Horizontal	Fundamental
Peak	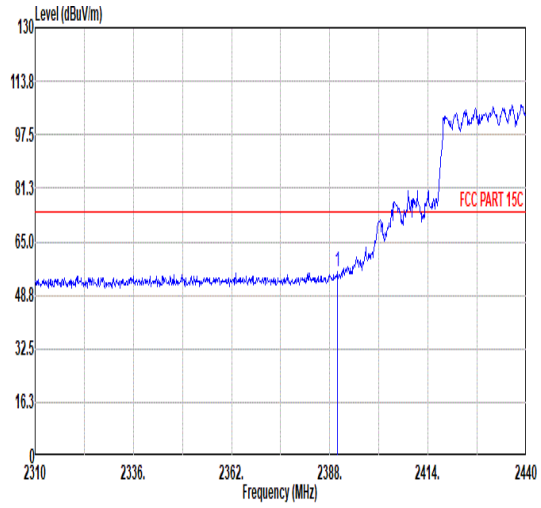	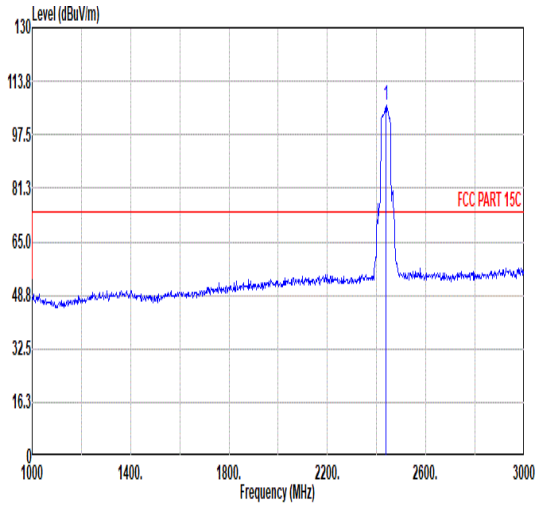
Avg	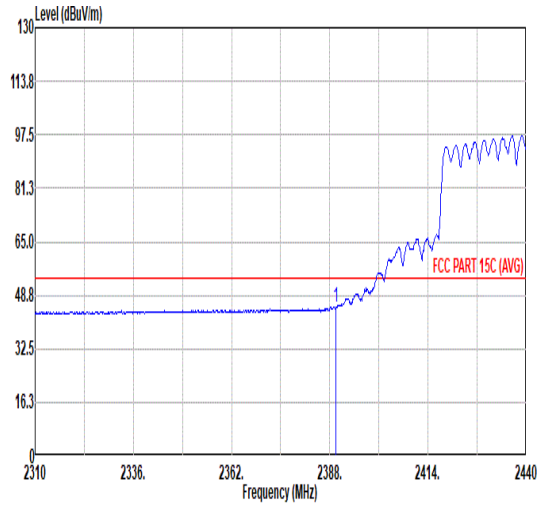	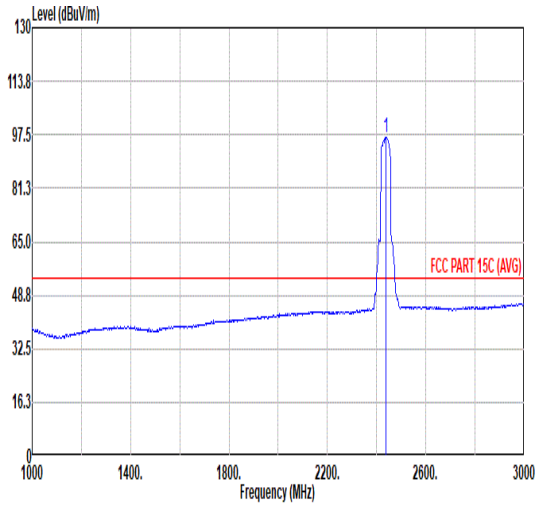

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.95	56.11	74.00	-17.89	43.21	32.48	6.60	32.18	6.00	269	0	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2437.00	106.29	------	------	93.39	32.43	6.68	32.21	6.00	269	0	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.69	45.35	54.00	-8.65	32.45	32.48	6.60	32.18	6.00	269	0	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2437.00	96.81	------	------	83.89	32.45	6.67	32.20	6.00	269	0	AVERAGE

Mode	11	
	Band Edge - R	
	2400-2483.5_802.11ax HE40_CH06_Full RU _2437MHz	
ANT	CDD 6+3	
Pol.	Horizontal	Fundamental
Peak	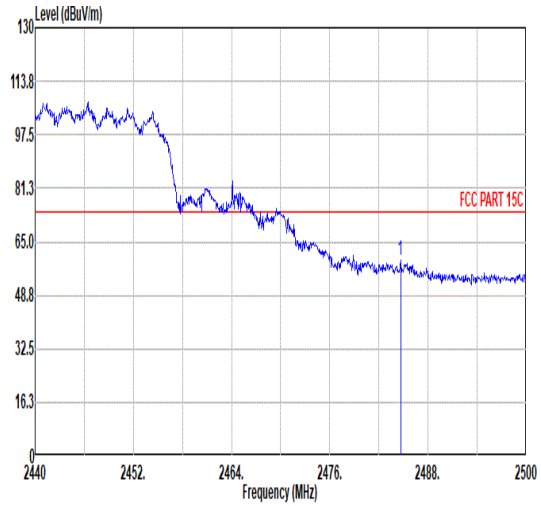	Blank
Avg	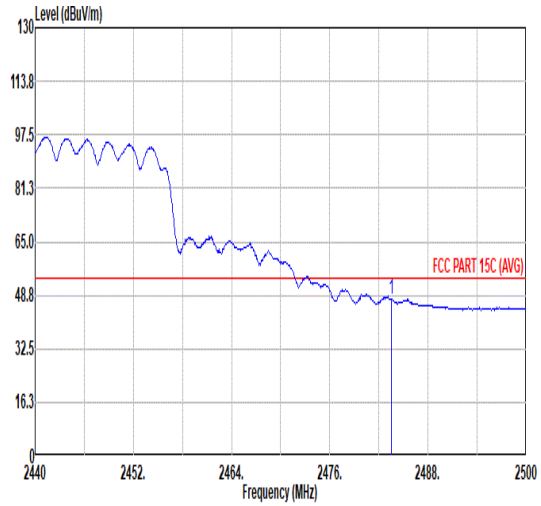	Blank

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2484.64	59.30	74.00	-14.70	46.19	32.61	6.73	32.23	6.00	269	0	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2483.50	47.41	54.00	-6.59	34.31	32.60	6.73	32.23	6.00	269	0	AVERAGE

Mode	11	
	Band Edge - L	
	2400-2483.5_802.11ax HE40_CH06_Full RU _2437MHz	
ANT	CDD 6+3	
Pol.	Vertical	Fundamental
Peak	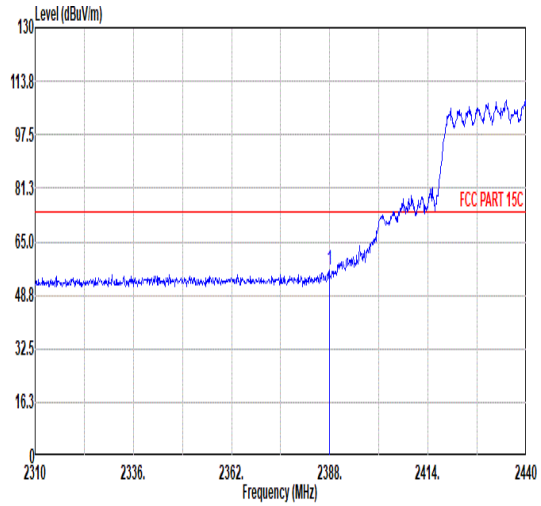	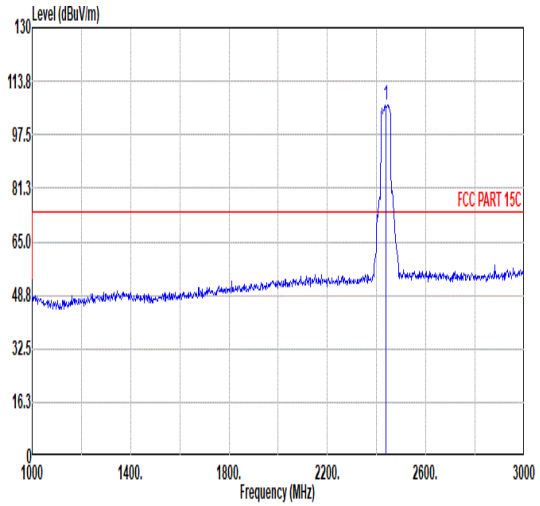
Avg	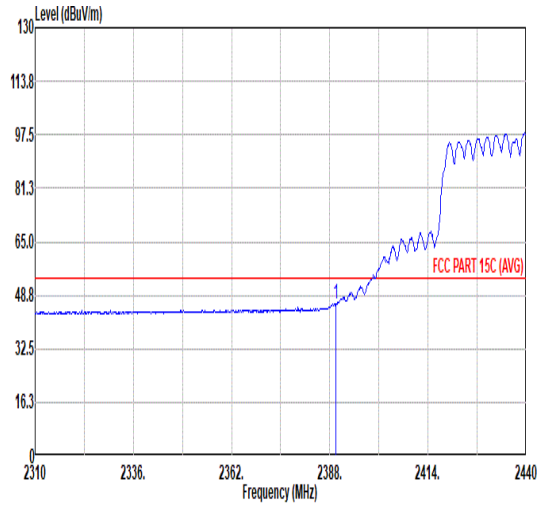	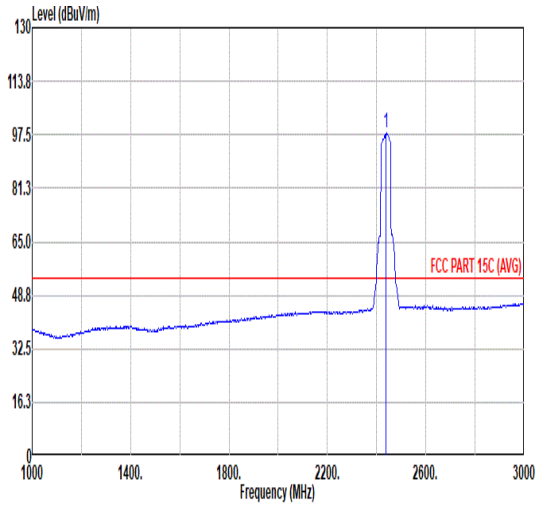

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2387.87	56.44	74.00	-17.56	43.57	32.45	6.60	32.18	6.00	100	236	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2437.00	106.34	------	------	93.46	32.41	6.68	32.21	6.00	100	236	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.69	46.33	54.00	-7.67	33.43	32.48	6.60	32.18	6.00	100	236	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2437.00	97.91	------	------	85.01	32.44	6.67	32.21	6.00	100	236	AVERAGE

Mode	11	
	Band Edge - R	
	2400-2483.5_802.11ax HE40_CH06_Full RU _2437MHz	
ANT	CDD 6+3	
Pol.	Vertical	Fundamental
Peak	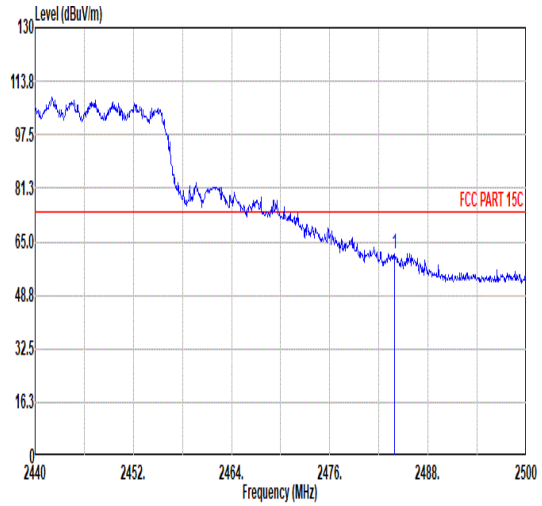	Blank
Avg	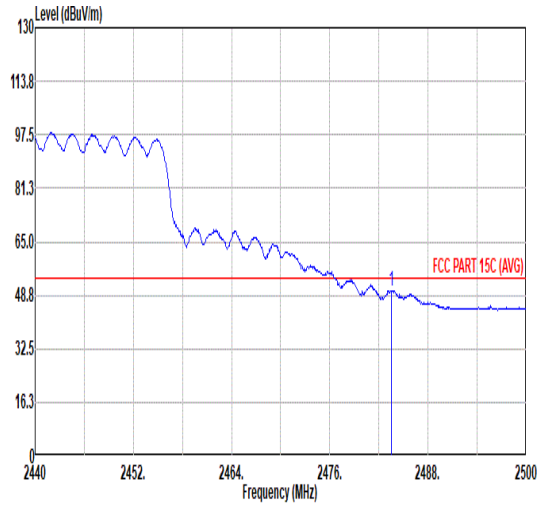	Blank

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2483.92	61.55	74.00	-12.45	48.45	32.60	6.73	32.23	6.00	100	236	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2483.56	50.06	54.00	-3.94	36.96	32.60	6.73	32.23	6.00	100	236	AVERAGE

Mode	11	
	Harmonic	
	2400-2483.5_802.11ax HE40_CH06_Full RU _2437MHz	
ANT	CDD 6+3	
Pol.	Horizontal	Vertical
Peak Avg	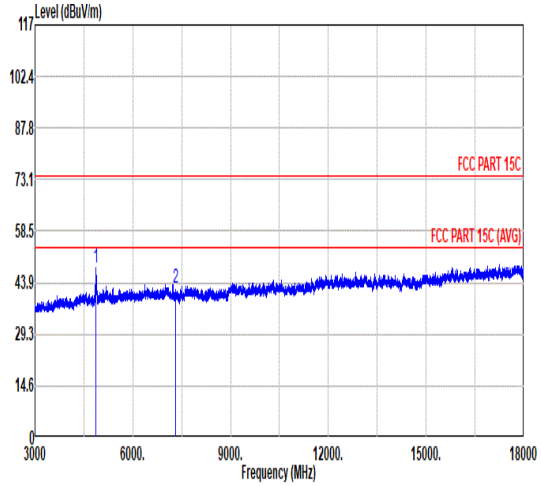 	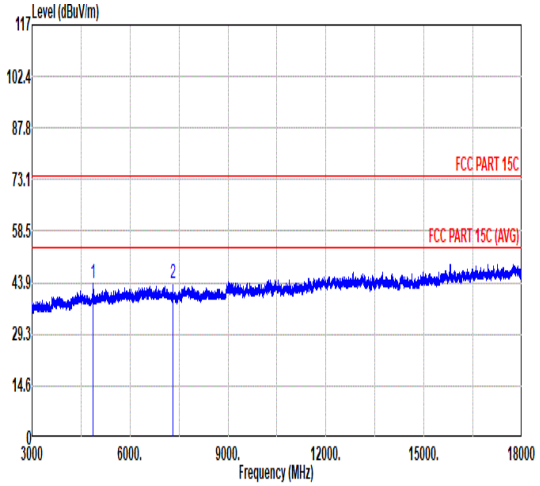

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4874.00	47.97	74.00	-26.03	67.21	33.90	10.34	63.48	0.00	---	---	PEAK
2	7311.00	42.28	74.00	-31.72	57.58	35.59	12.78	63.67	0.00	---	---	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4874.00	43.84	74.00	-30.16	63.08	33.90	10.34	63.48	0.00	---	---	PEAK
2	7311.00	43.90	74.00	-30.10	59.20	35.59	12.78	63.67	0.00	---	---	PEAK

Mode	12	
	Band Edge - L	
	2400-2483.5_802.11ax HE40_CH09_Full RU _2452MHz	
ANT	CDD 6+3	
Pol.	Horizontal	Fundamental
Peak	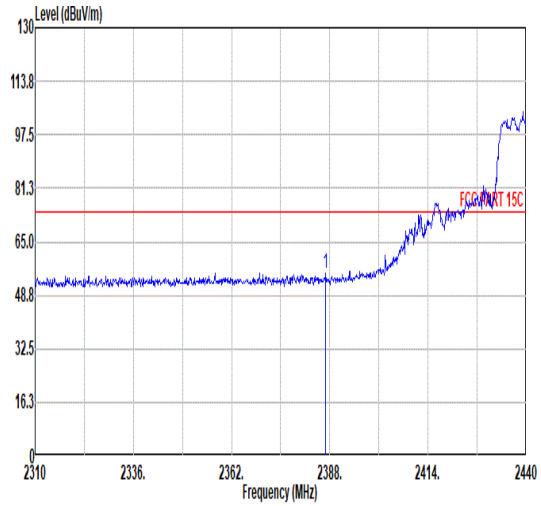	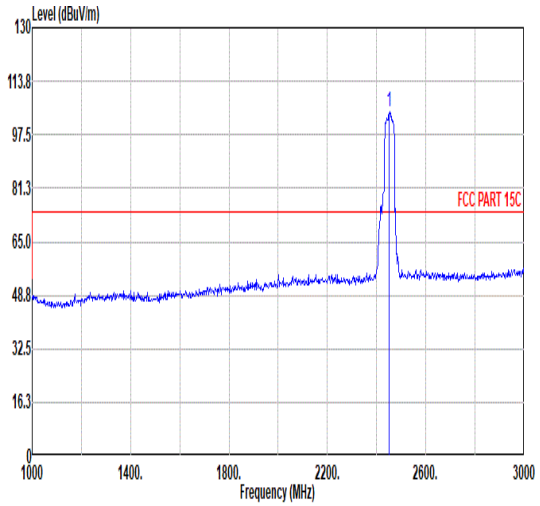
Avg	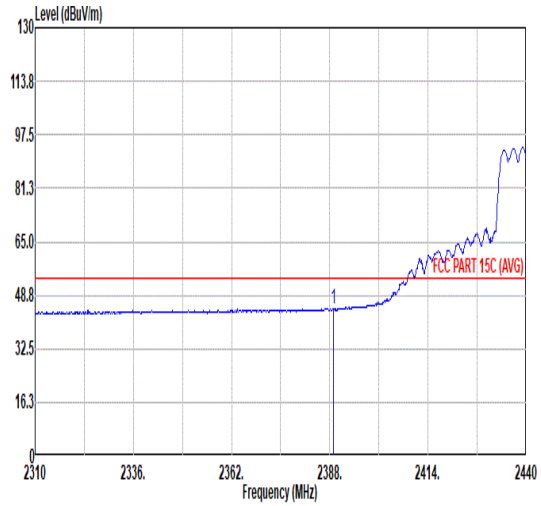	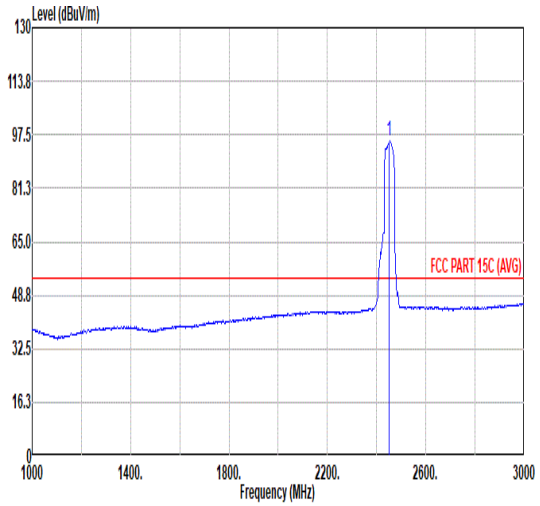

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2386.96	55.62	74.00	-18.38	42.76	32.44	6.60	32.18	6.00	246	335	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2452.00	104.49	------	------	91.59	32.42	6.69	32.21	6.00	246	335	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2388.91	44.78	54.00	-9.22	31.89	32.47	6.60	32.18	6.00	246	335	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2452.00	95.48	------	------	82.58	32.42	6.69	32.21	6.00	246	335	AVERAGE

Mode	12	
	Band Edge - R	
	2400-2483.5_802.11ax HE40_CH09_Full RU _2452MHz	
ANT	CDD 6+3	
Pol.	Horizontal	Fundamental
Peak	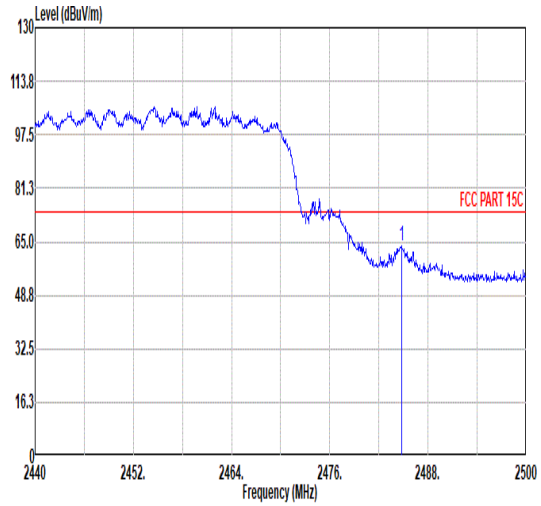	Blank
Avg	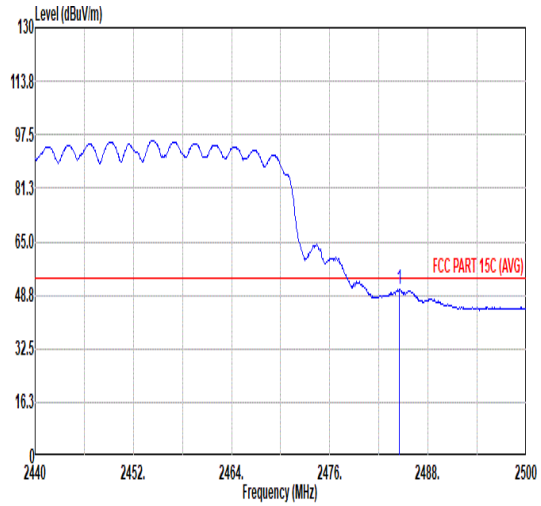	Blank

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2484.76	63.59	74.00	-10.41	50.48	32.61	6.73	32.23	6.00	246	335	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2484.52	50.33	54.00	-3.67	37.22	32.61	6.73	32.23	6.00	246	335	AVERAGE

Mode	12	
	Band Edge - L	
	2400-2483.5_802.11ax HE40_CH09_Full RU _2452MHz	
ANT	CDD 6+3	
Pol.	Vertical	Fundamental
Peak	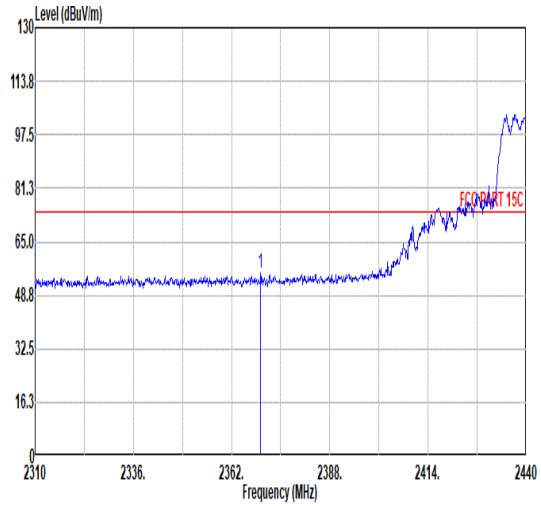	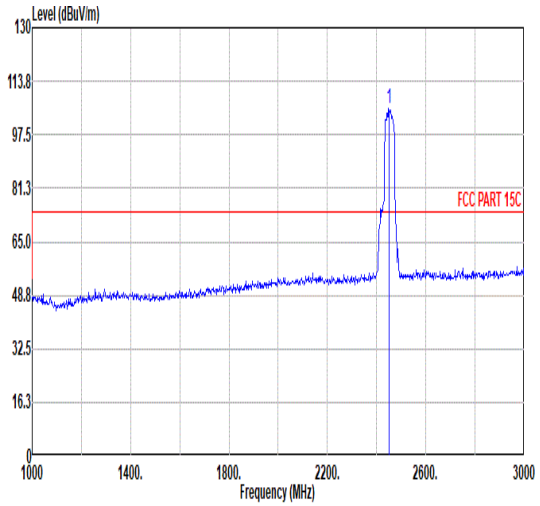
Avg	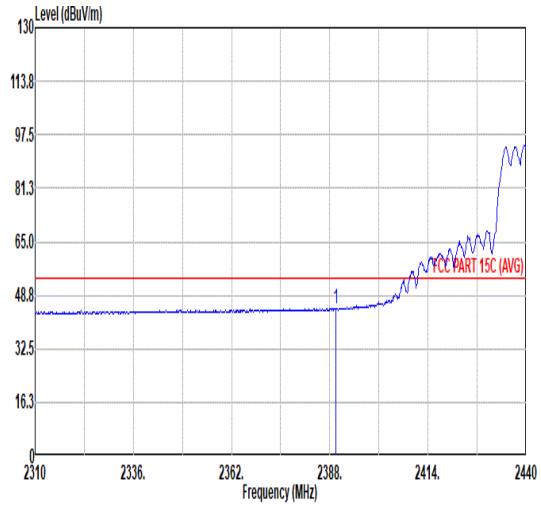	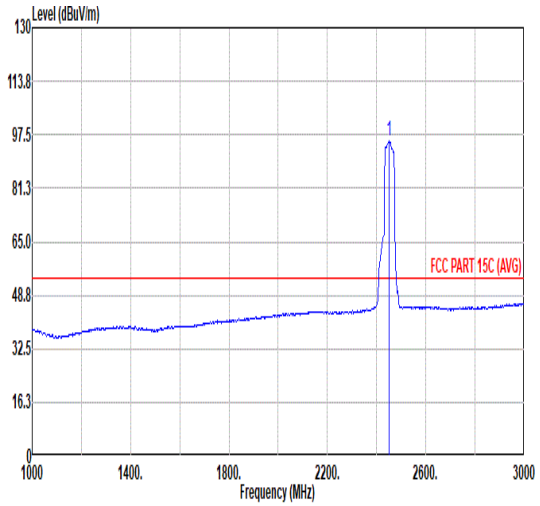

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2369.67	55.30	74.00	-18.70	42.68	32.24	6.57	32.19	6.00	100	232	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2452.00	105.70	------	------	92.81	32.42	6.68	32.21	6.00	100	232	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.69	44.65	54.00	-9.35	31.75	32.48	6.60	32.18	6.00	100	232	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2452.00	95.85	------	------	82.97	32.40	6.69	32.21	6.00	100	232	AVERAGE

Mode	12	
	Band Edge - R	
	2400-2483.5_802.11ax HE40_CH09_Full RU _2452MHz	
ANT	CDD 6+3	
Pol.	Vertical	Fundamental
Peak	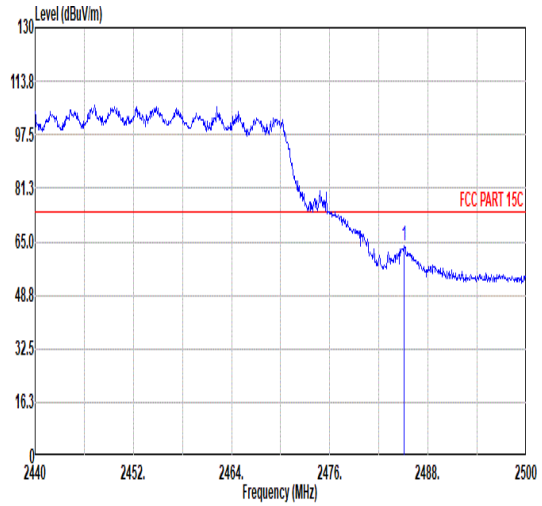 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2485.12 63.57 74.00 -10.43 50.45 32.61 6.74 32.23 6.00 100 232 PEAK	Blank
Avg	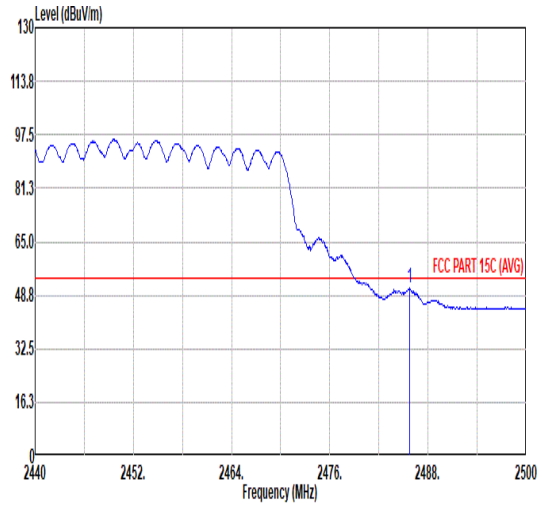 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2485.72 50.83 54.00 -3.17 37.71 32.61 6.74 32.23 6.00 100 232 AVERAGE	Blank

Mode	12	
	Harmonic	
	2400-2483.5_802.11ax HE40_CH09_Full RU _2452MHz	
ANT	CDD 6+3	
Pol.	Horizontal	Vertical
Peak Avg	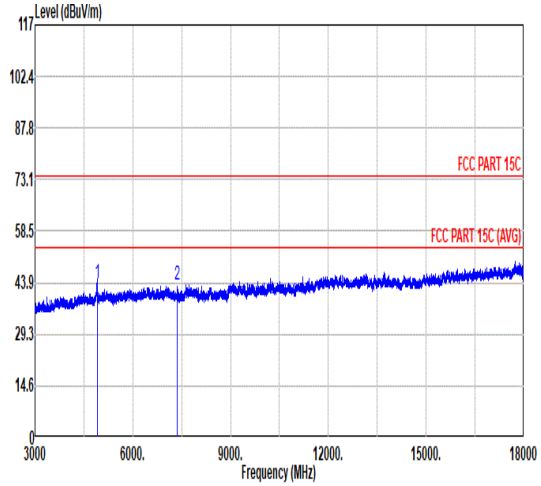 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4904.00 43.62 74.00 -30.38 62.83 33.90 10.37 63.48 0.00 --- --- PEAK 2 7356.00 43.28 74.00 -30.72 58.60 35.54 12.84 63.70 0.00 --- --- PEAK	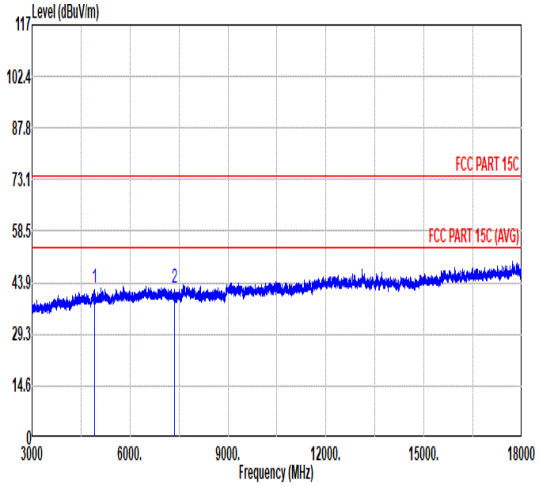 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4904.00 42.33 74.00 -31.67 61.54 33.90 10.37 63.48 0.00 --- --- PEAK 2 7356.00 42.59 74.00 -31.41 57.91 35.54 12.84 63.70 0.00 --- --- PEAK

Mode	13	
	Band Edge	
	2400-2483.5_802.11ax HE20_CH01_ RU26/0_2412MHz	
ANT	CDD 6+3	
Pol.	Horizontal	Fundamental
Peak	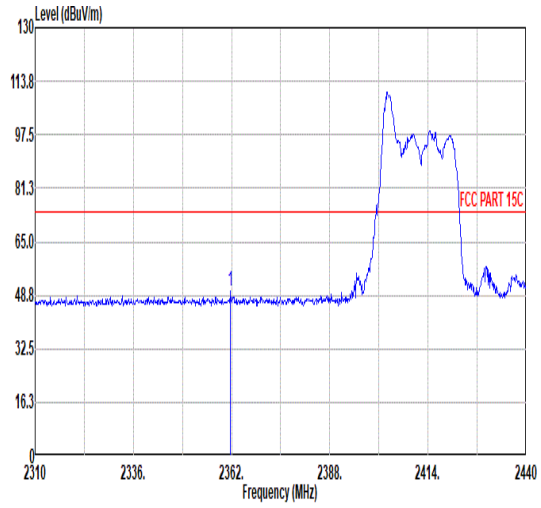	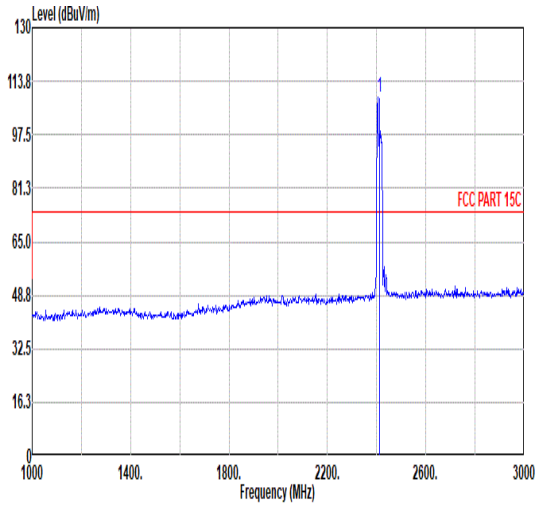
Avg	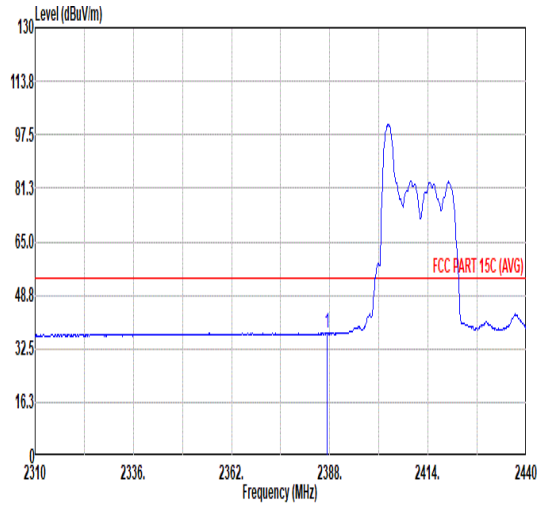	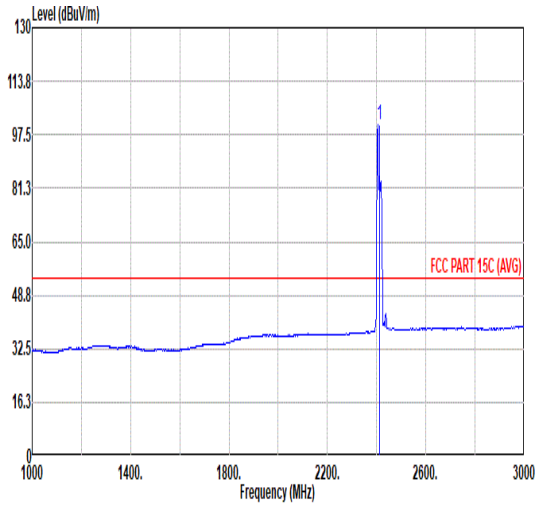

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2361.74	49.83	74.00	-24.17	42.16	31.79	7.12	37.24	6.00	111	138	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2412.00	109.01	------	------	101.13	31.91	7.19	37.22	6.00	111	138	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2387.22	37.29	54.00	-16.71	29.50	31.86	7.16	37.23	6.00	111	138	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2412.00	100.37	------	------	92.49	31.91	7.19	37.22	6.00	111	138	AVERAGE

Mode	13	
	Band Edge	
	2400-2483.5_802.11ax HE20_CH01_ RU26/0_2412MHz	
ANT	CDD 6+3	
Pol.	Vertical	Fundamental
Peak	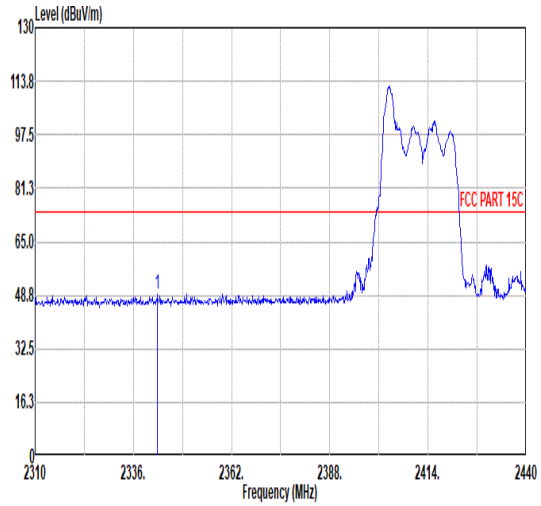	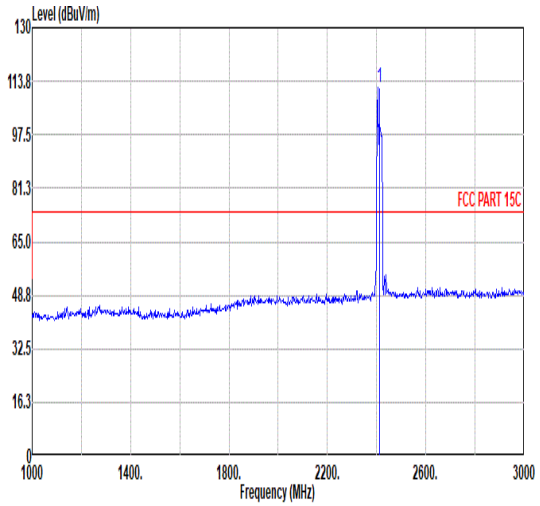
Avg	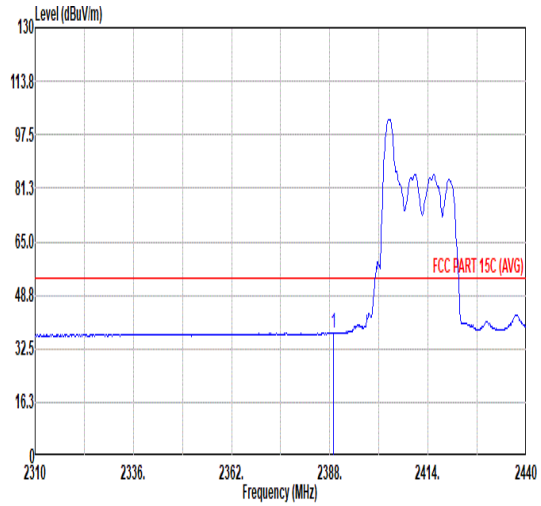	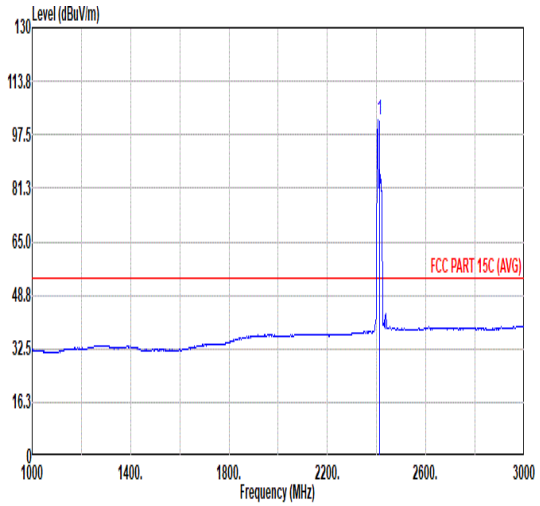

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2342.37	48.90	74.00	-25.10	41.33	31.73	7.09	37.25	6.00	100	88	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2412.00	111.64	------	------	103.76	31.91	7.19	37.22	6.00	100	88	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2388.91	37.29	54.00	-16.71	29.49	31.87	7.16	37.23	6.00	100	88	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2412.00	102.06	------	------	94.18	31.91	7.19	37.22	6.00	100	88	AVERAGE

Mode	14	
	Band Edge	
	2400-2483.5_802.11ax HE20_CH01_RU52/37_2412MHz	
ANT	CDD 6+3	
Pol.	Horizontal	Fundamental
Peak	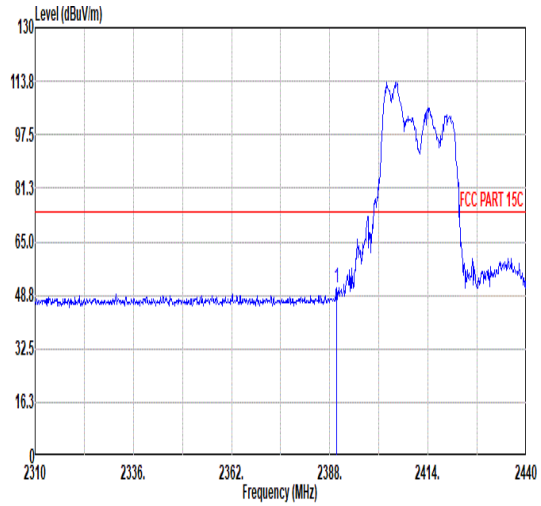	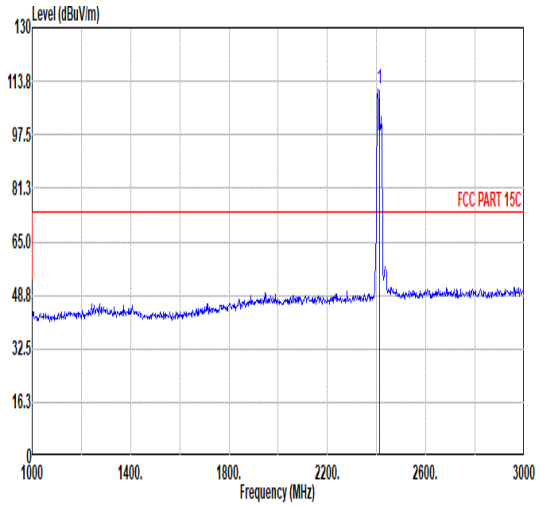
Avg	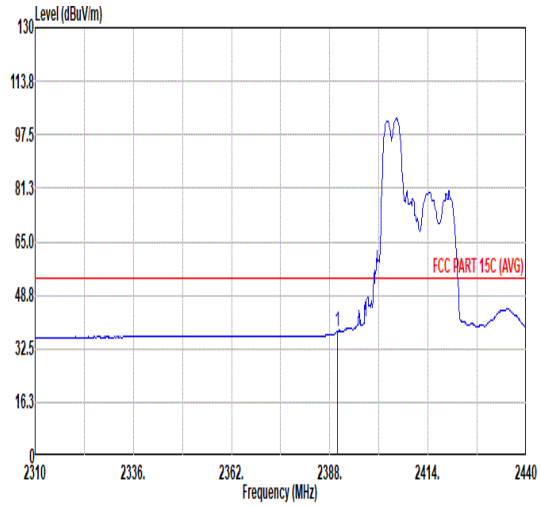	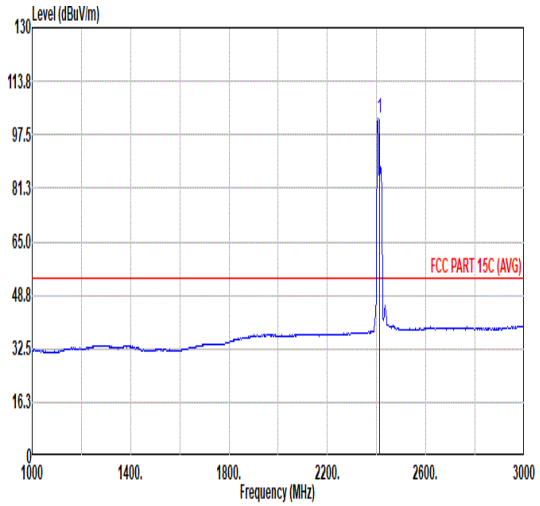

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.82	51.05	74.00	-22.95	43.25	31.87	7.16	37.23	6.00	313	141	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2412.00	111.54	------	------	103.65	31.92	7.19	37.22	6.00	313	141	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.95	37.76	54.00	-16.24	29.96	31.87	7.16	37.23	6.00	313	141	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2412.00	102.49	------	------	94.60	31.92	7.19	37.22	6.00	313	141	AVERAGE

Mode	14	
	Band Edge	
	2400-2483.5_802.11ax HE20_CH01_RU52/37_2412MHz	
ANT	CDD 6+3	
Pol.	Vertical	Fundamental
Peak	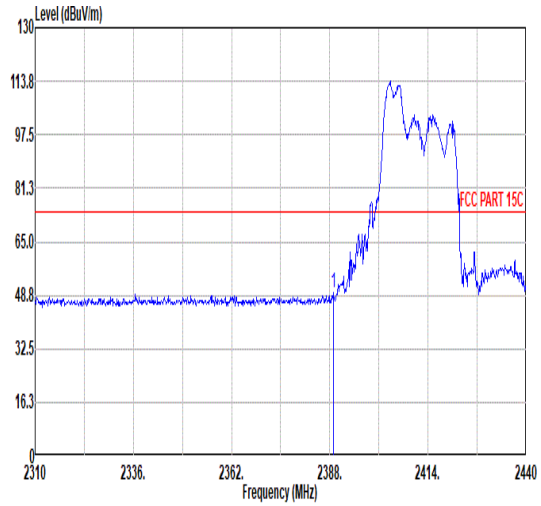	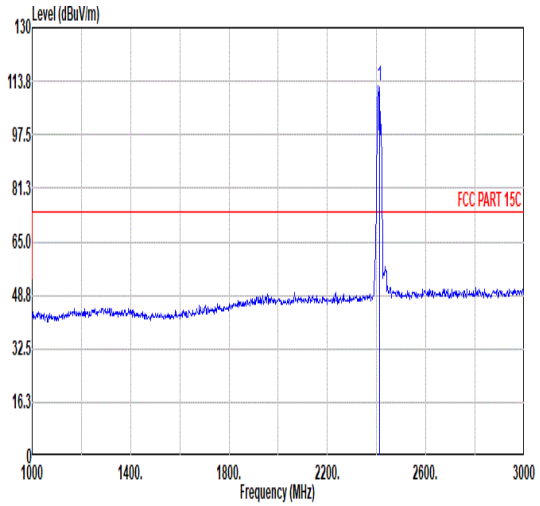
Avg	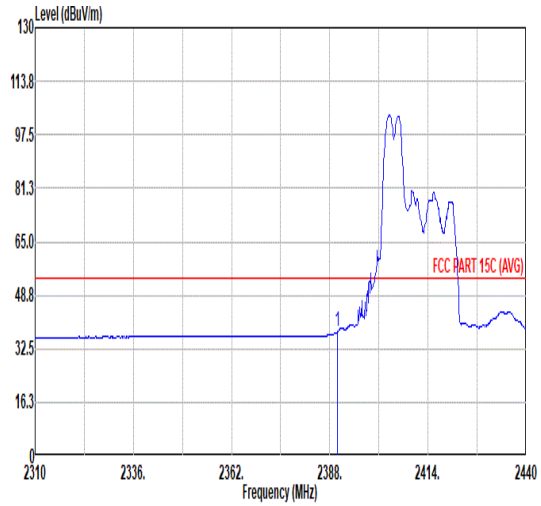	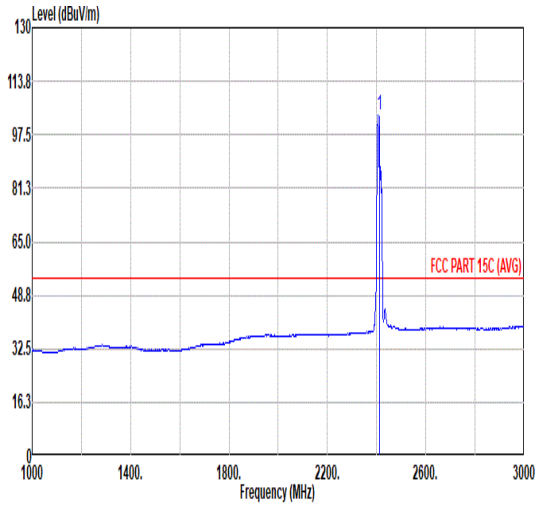

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.04	49.44	74.00	-24.56	41.64	31.87	7.16	37.23	6.00	148	79	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2412.00	112.47	------	------	104.59	31.91	7.19	37.22	6.00	148	79	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.95	37.58	54.00	-16.42	29.78	31.87	7.16	37.23	6.00	148	79	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2412.00	103.56	------	------	95.68	31.91	7.19	37.22	6.00	148	79	AVERAGE

Mode	15	
	Band Edge	
	2400-2483.5_802.11ax HE20_CH01_RU106/53_2412MHz	
ANT	CDD 6+3	
Pol.	Horizontal	Fundamental
Peak	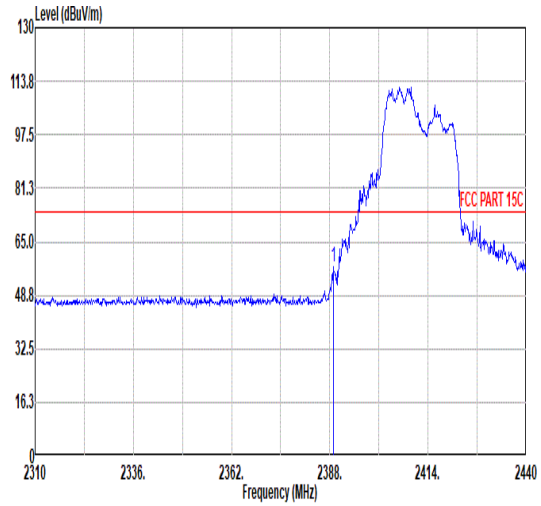	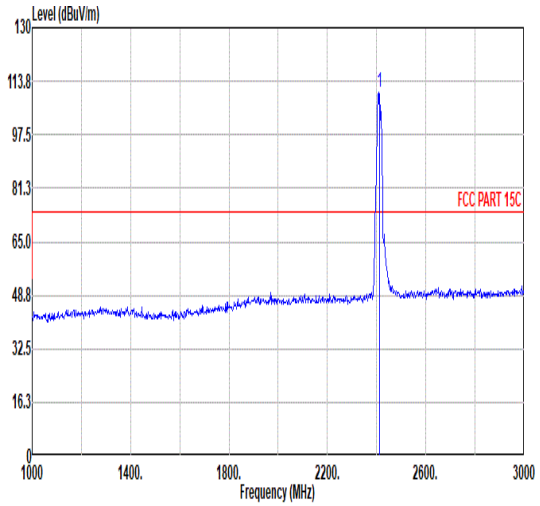
Avg	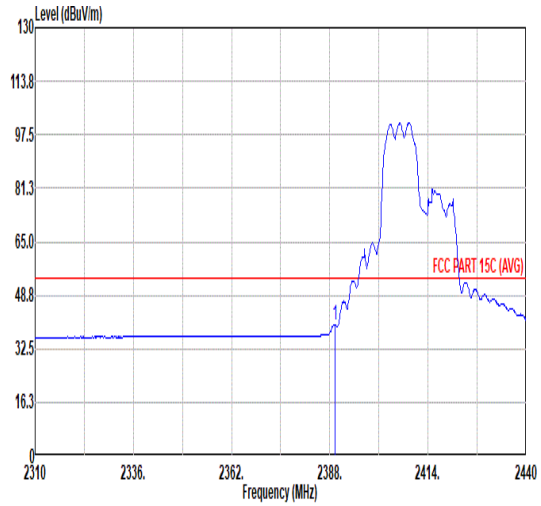	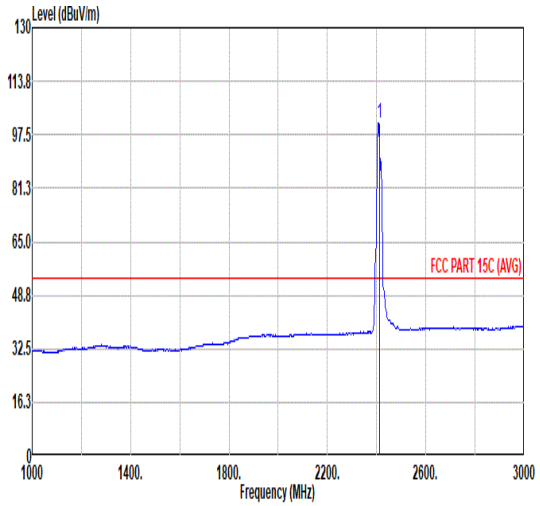

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2388.91	57.37	74.00	-16.63	49.57	31.87	7.16	37.23	6.00	310	199	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2412.00	110.37	------	------	102.46	31.93	7.20	37.22	6.00	310	199	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.30	39.97	54.00	-14.03	32.17	31.87	7.16	37.23	6.00	310	199	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2412.00	101.29	------	------	93.38	31.93	7.20	37.22	6.00	310	199	AVERAGE

Mode	15	
	Band Edge	
	2400-2483.5_802.11ax HE20_CH01_RU106/53_2412MHz	
ANT	CDD 6+3	
Pol.	Vertical	Fundamental
Peak	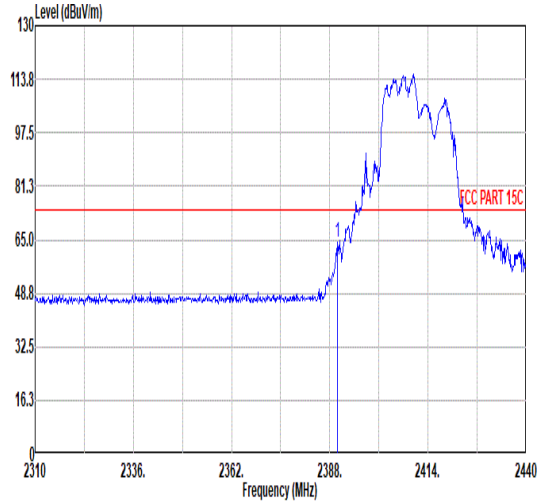	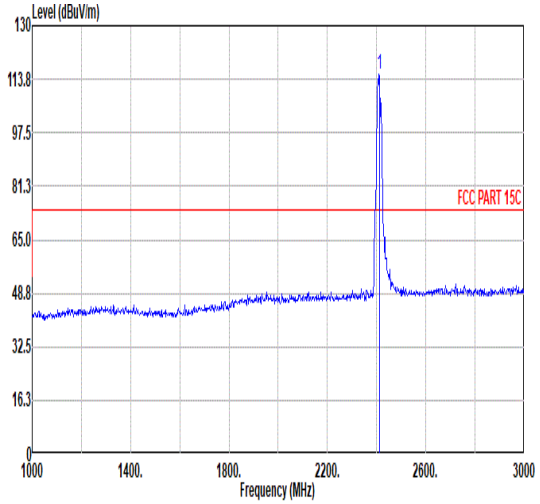
Avg	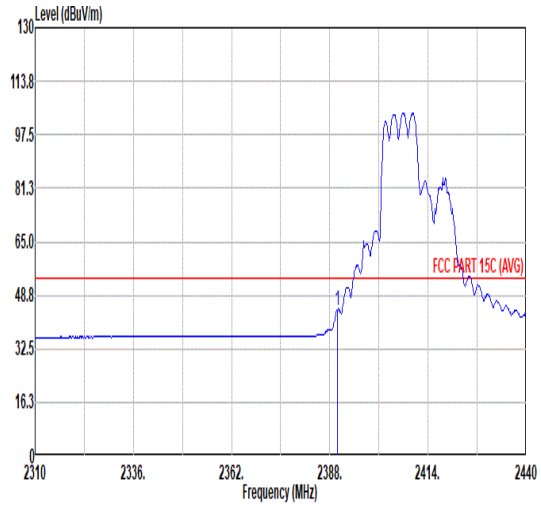	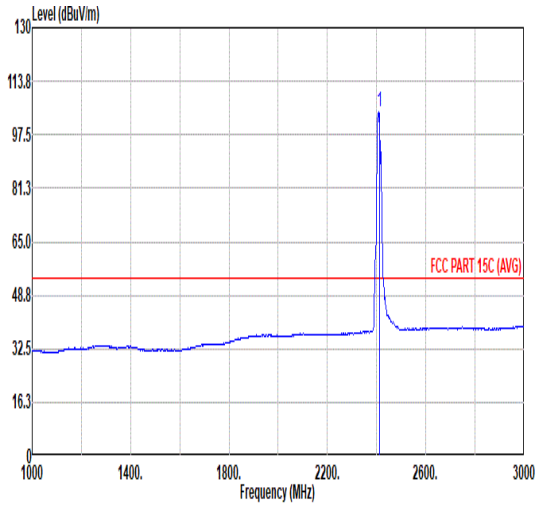

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.95	64.10	74.00	-9.90	56.30	31.87	7.16	37.23	6.00	193	86	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2412.00	115.31	------	------	107.42	31.92	7.19	37.22	6.00	193	86	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.95	44.20	54.00	-9.80	36.40	31.87	7.16	37.23	6.00	193	86	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2412.00	104.46	------	------	96.57	31.92	7.19	37.22	6.00	193	86	AVERAGE

Mode	16	
	Band Edge	
	2400-2483.5_802.11ax HE20_CH11_RU26/8_2462MHz	
ANT	CDD 6+3	
Pol.	Horizontal	Fundamental
Peak	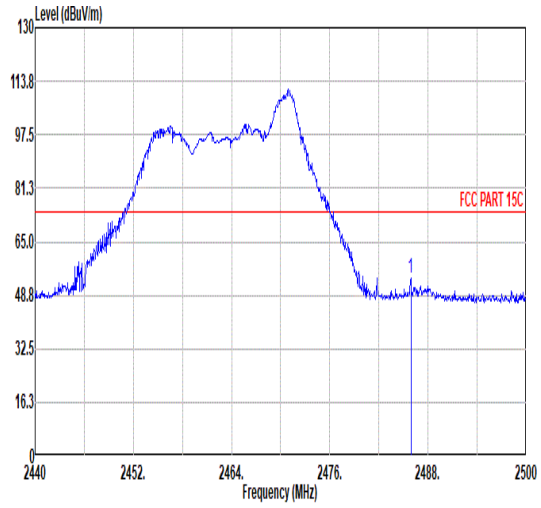	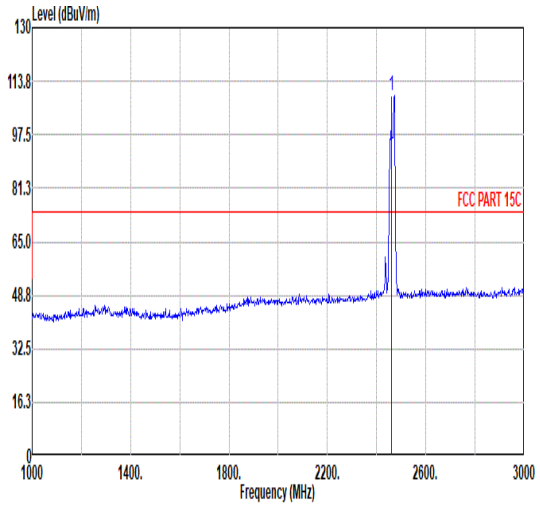
Avg	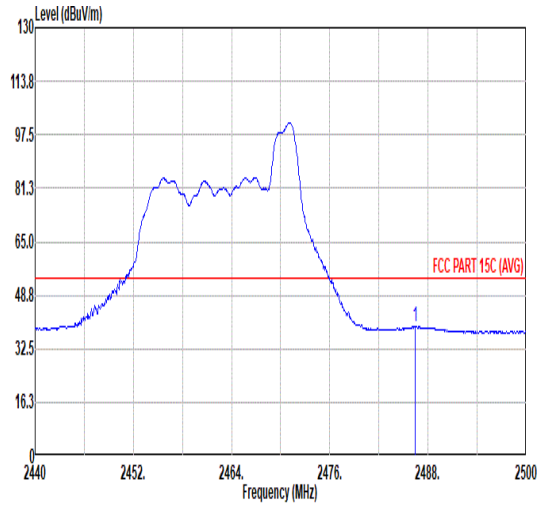	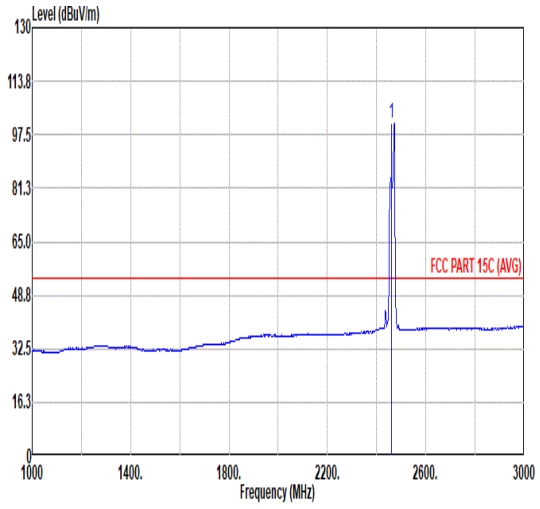

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2485.90	53.76	74.00	-20.24	45.47	32.16	7.33	37.20	6.00	333	199	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2462.00	109.33	------	------	101.11	32.12	7.31	37.21	6.00	333	199	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2486.44	39.31	54.00	-14.69	31.01	32.16	7.34	37.20	6.00	333	199	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2462.00	100.86	------	------	92.64	32.12	7.31	37.21	6.00	333	199	AVERAGE

Mode	16	
	Band Edge	
	2400-2483.5_802.11ax HE20_CH11_RU26/8_2462MHz	
ANT	CDD 6+3	
Pol.	Vertical	Fundamental
Peak	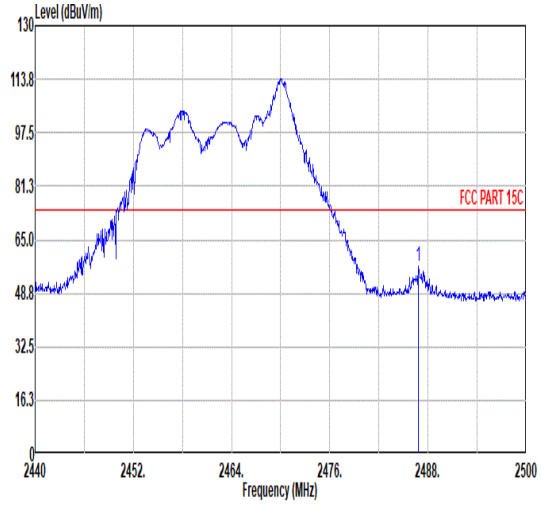	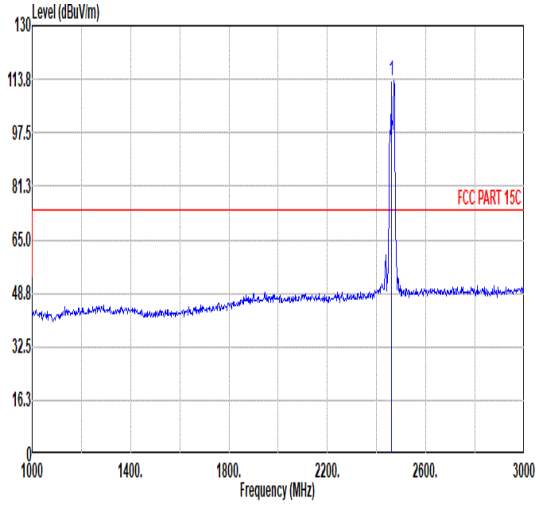
Avg	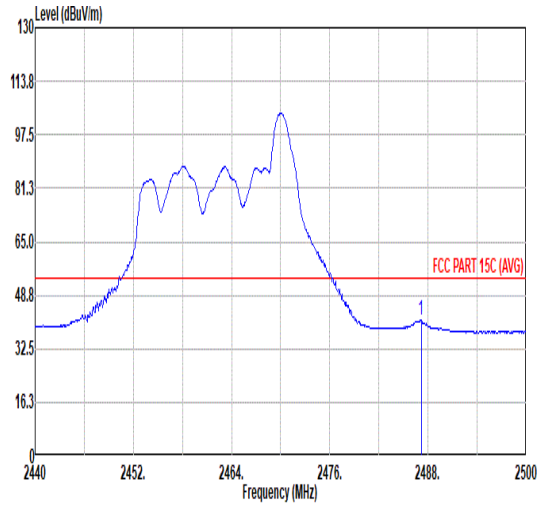	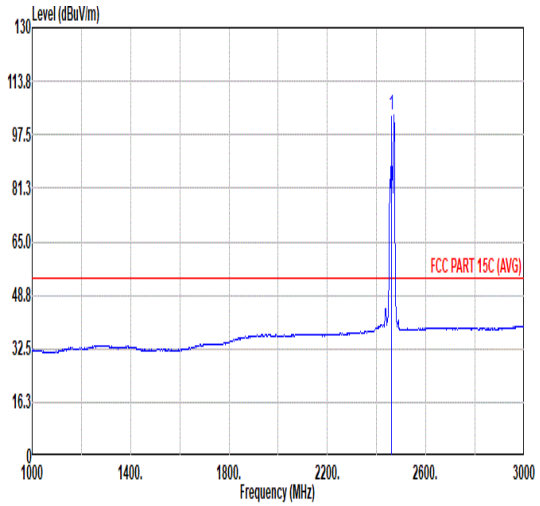

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2486.86	56.94	74.00	-17.06	48.64	32.16	7.34	37.20	6.00	106	85	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2462.00	113.55	------	------	105.34	32.11	7.31	37.21	6.00	106	85	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2487.16	41.09	54.00	-12.91	32.79	32.16	7.34	37.20	6.00	106	85	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2462.00	103.70	------	------	95.49	32.11	7.31	37.21	6.00	106	85	AVERAGE

Mode	17	
	Band Edge	
	2400-2483.5_802.11ax HE20_CH11_RU52/40_2462MHz	
ANT	CDD 6+3	
Pol.	Horizontal	Fundamental
Peak	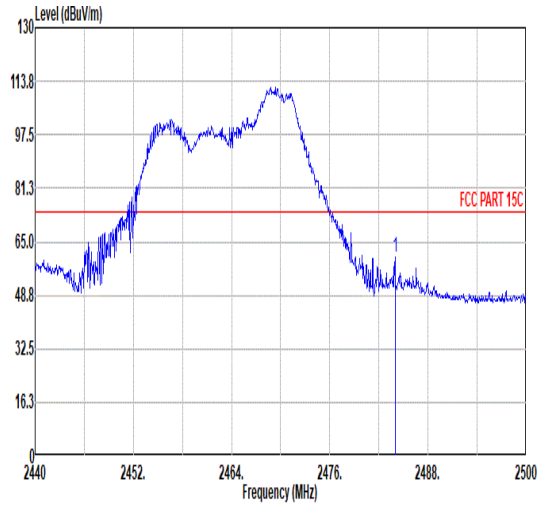	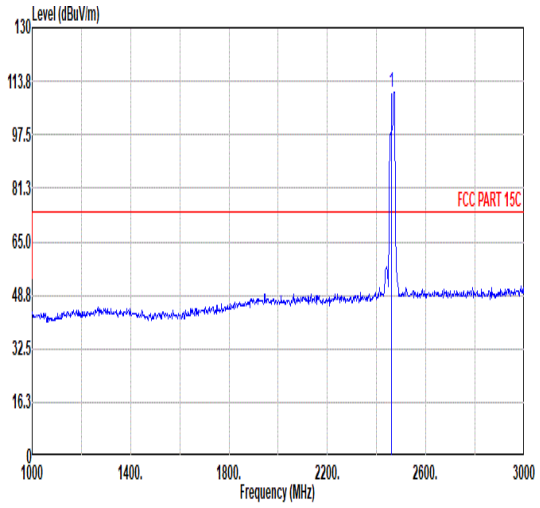
Avg	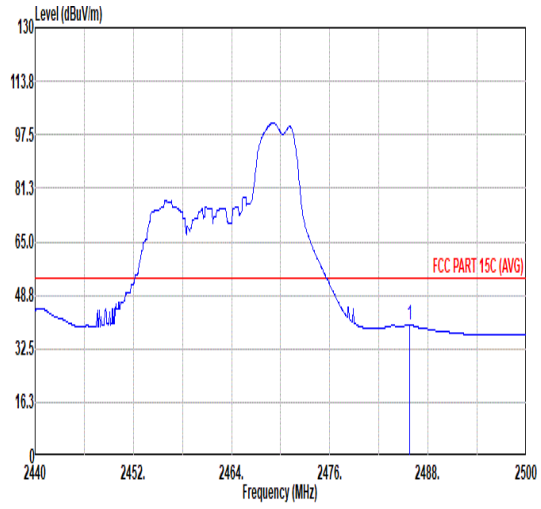	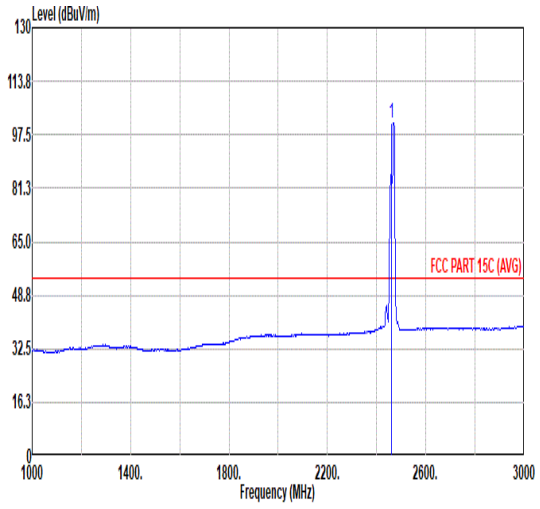

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2483.98	60.12	74.00	-13.88	51.84	32.15	7.33	37.20	6.00	335	201	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2462.00	110.32	------	------	102.11	32.11	7.31	37.21	6.00	335	201	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2485.72	39.73	54.00	-14.27	31.44	32.16	7.33	37.20	6.00	335	201	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2462.00	101.26	------	------	93.05	32.11	7.31	37.21	6.00	335	201	AVERAGE

Mode	17	
	Band Edge	
	2400-2483.5_802.11ax HE20_CH11_RU52/40_2462MHz	
ANT	CDD 6+3	
Pol.	Vertical	Fundamental
Peak	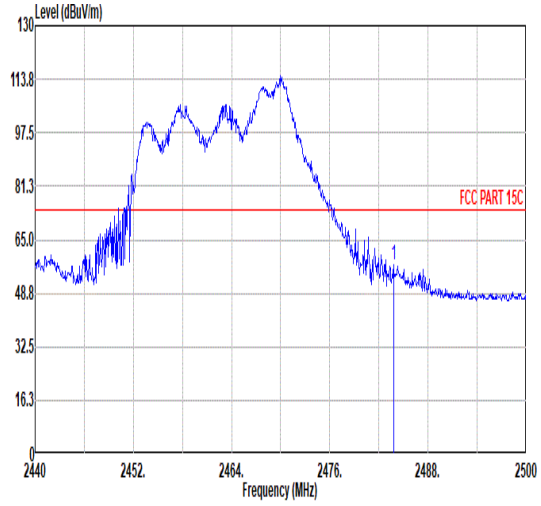	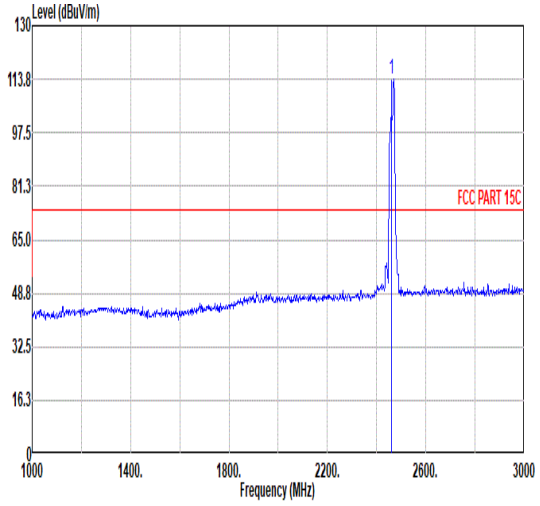
Avg	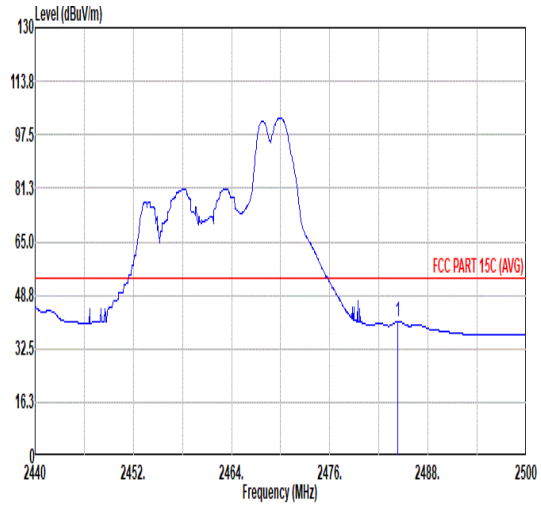	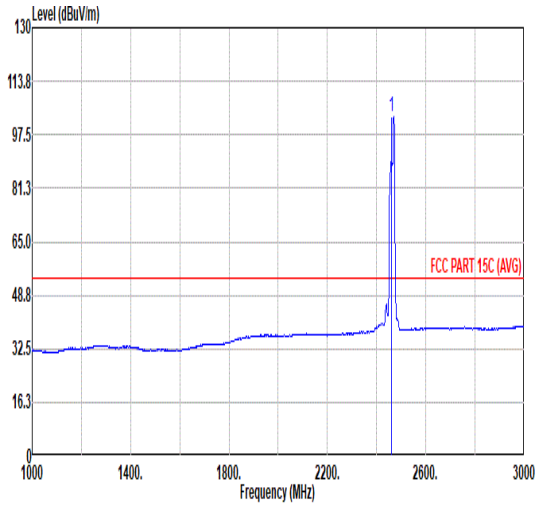

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2483.80	57.44	74.00	-16.56	49.16	32.15	7.33	37.20	6.00	105	86	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2462.00	114.00	------	------	105.79	32.11	7.31	37.21	6.00	105	86	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2484.34	40.83	54.00	-13.17	32.55	32.15	7.33	37.20	6.00	105	86	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2462.00	102.80	------	------	94.59	32.11	7.31	37.21	6.00	105	86	AVERAGE

Mode	18	
	Band Edge	
	2400-2483.5_802.11ax HE20_CH11_RU106/54_2462MHz	
ANT	CDD 6+3	
Pol.	Horizontal	Fundamental
Peak	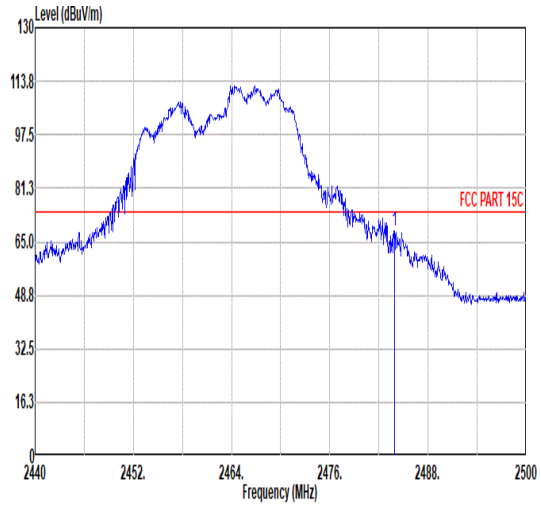	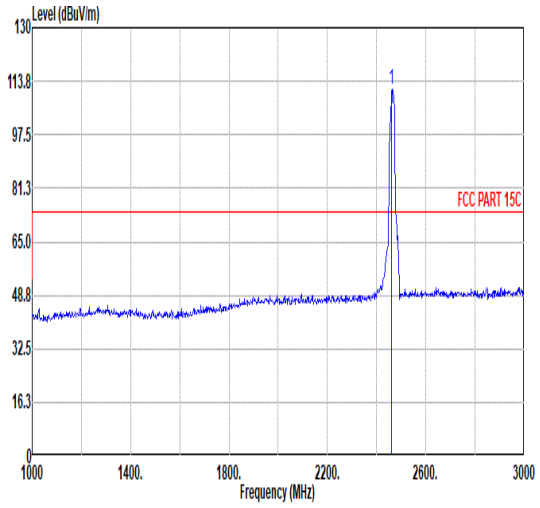
Avg	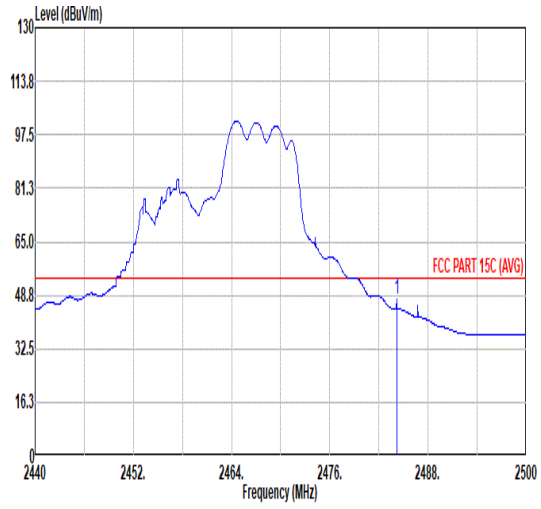	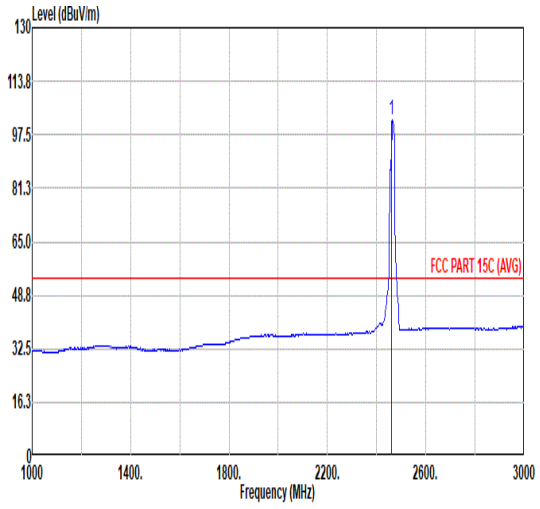

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2483.92	68.33	74.00	-5.67	60.05	32.15	7.33	37.20	6.00	307	130	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2462.00	111.49	------	------	103.31	32.09	7.30	37.21	6.00	307	130	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2484.16	47.44	54.00	-6.56	39.16	32.15	7.33	37.20	6.00	307	130	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2462.00	101.87	------	------	93.69	32.09	7.30	37.21	6.00	307	130	AVERAGE

Mode	18	
	Band Edge	
	2400-2483.5_802.11ax HE20_CH11_RU106/54_2462MHz	
ANT	CDD 6+3	
Pol.	Vertical	Fundamental
Peak	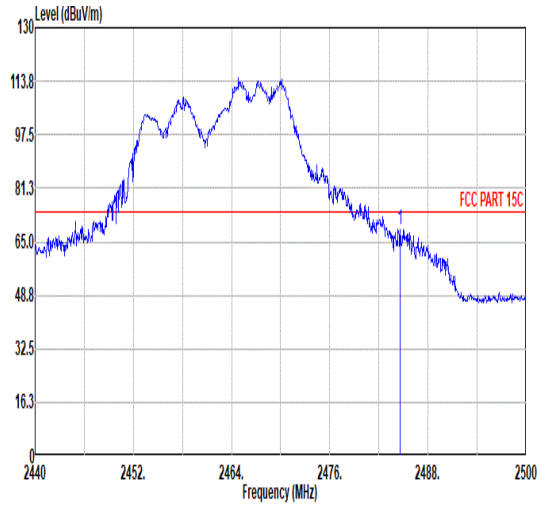 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2484.58 68.62 74.00 -5.38 60.34 32.15 7.33 37.20 6.00 106 85 PEAK	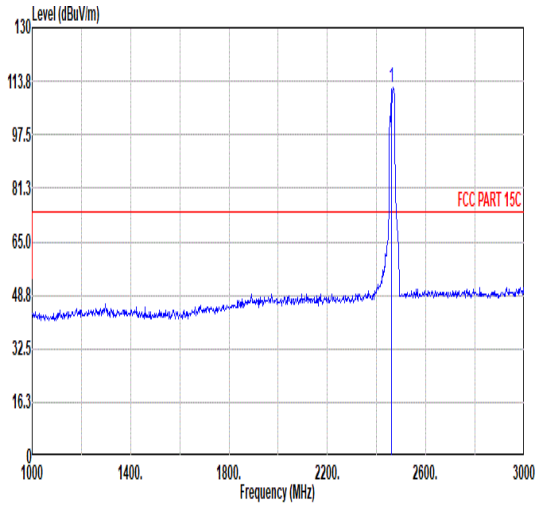 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2462.00 111.92 ------ ------ 103.73 32.10 7.30 37.21 6.00 106 85 PEAK
Avg	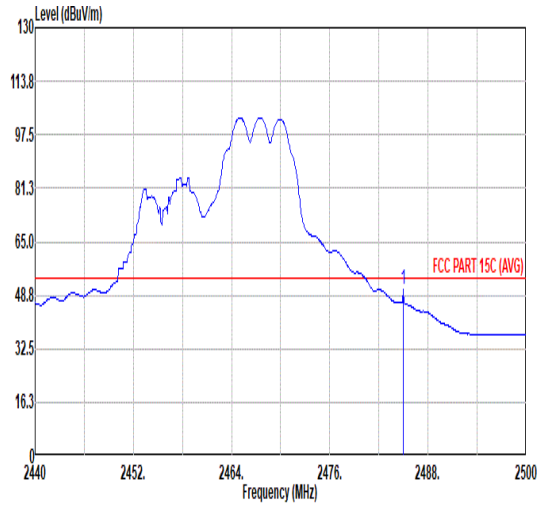 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2484.94 50.75 54.00 -3.25 42.47 32.15 7.33 37.20 6.00 106 85 AVERAGE	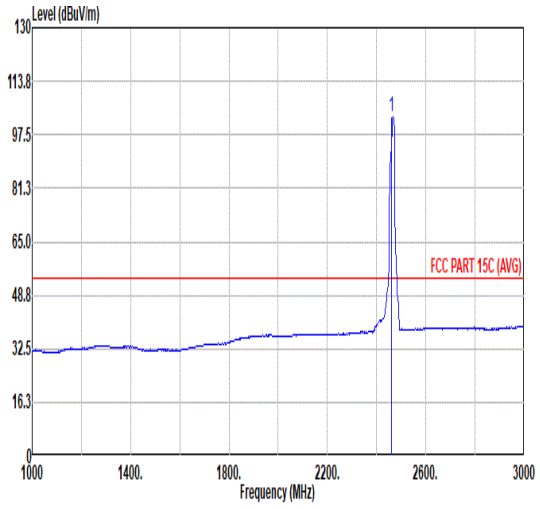 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2462.00 102.91 ------ ------ 94.72 32.10 7.30 37.21 6.00 106 85 AVERAGE

Mode	19	
	Band Edge	
	2400-2483.5_802.11ax HE20_CH2_Full RU _2417MHz	
ANT	6+3	
Pol.	Horizontal	Fundamental
Peak	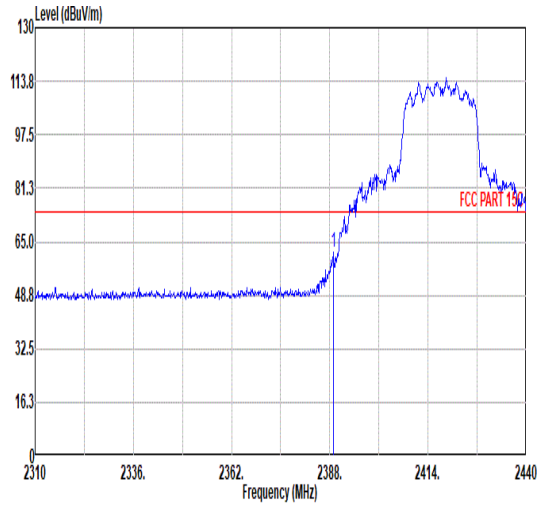	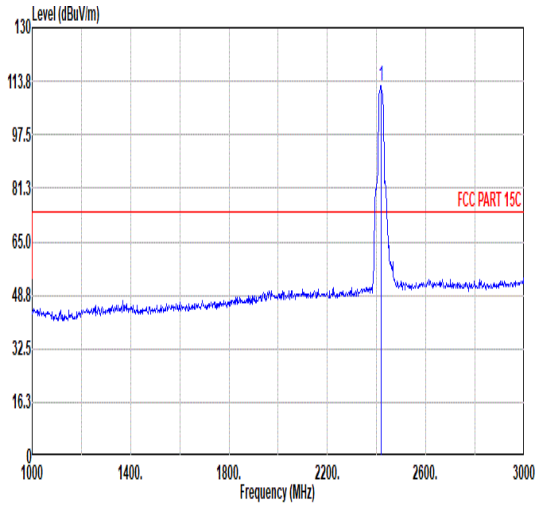
Avg	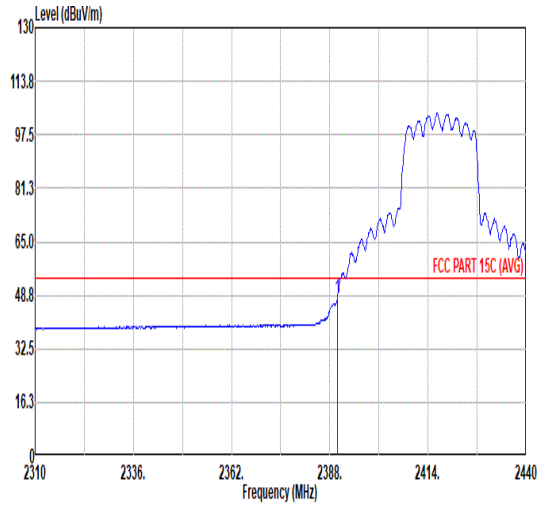	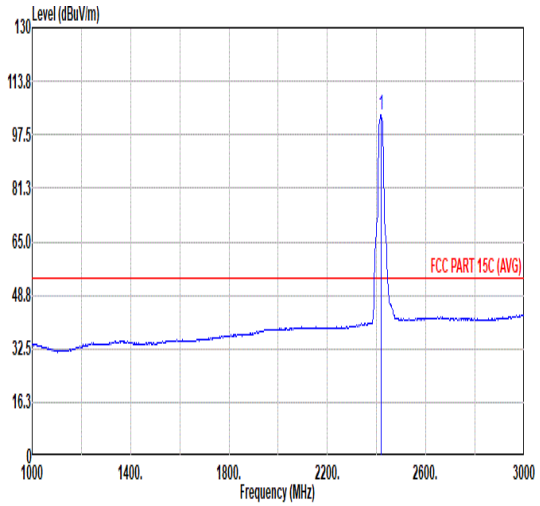

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2388.91	61.87	74.00	-12.13	53.63	32.19	7.10	37.05	6.00	307	9	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2417.00	112.55	------	------	104.07	32.33	7.15	37.00	6.00	307	9	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.95	47.36	54.00	-6.64	39.10	32.20	7.11	37.05	6.00	307	9	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2417.00	103.70	------	------	95.22	32.33	7.15	37.00	6.00	307	9	AVERAGE

Mode	19	
	Band Edge	
	2400-2483.5_802.11ax HE20_CH2_Full RU _2417MHz	
ANT	6+3	
Pol.	Vertical	Fundamental
Peak	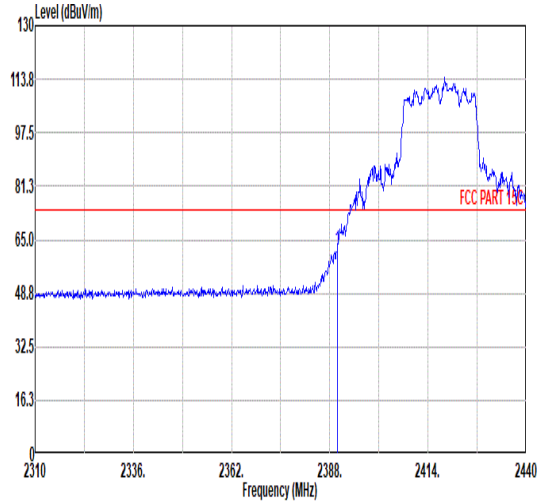	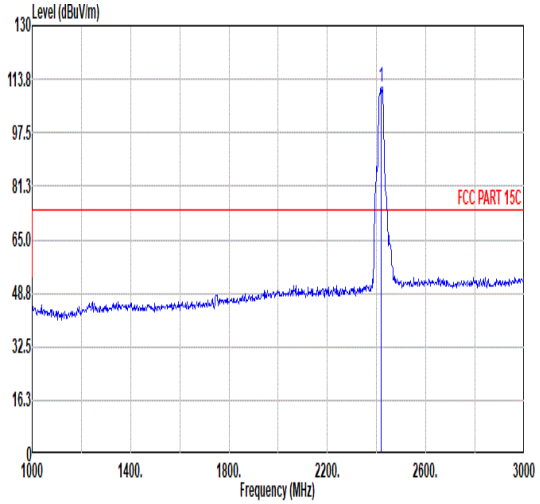
Avg	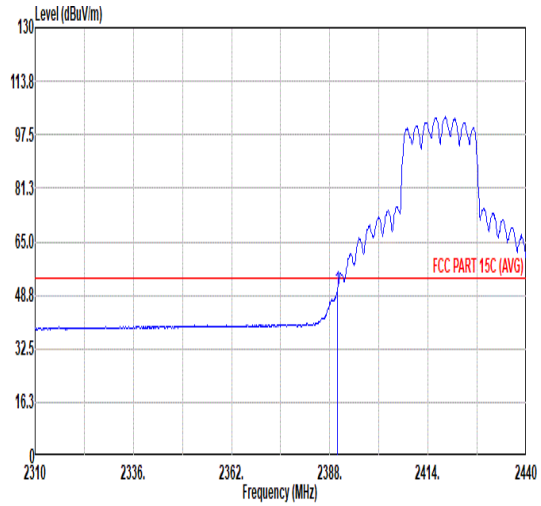	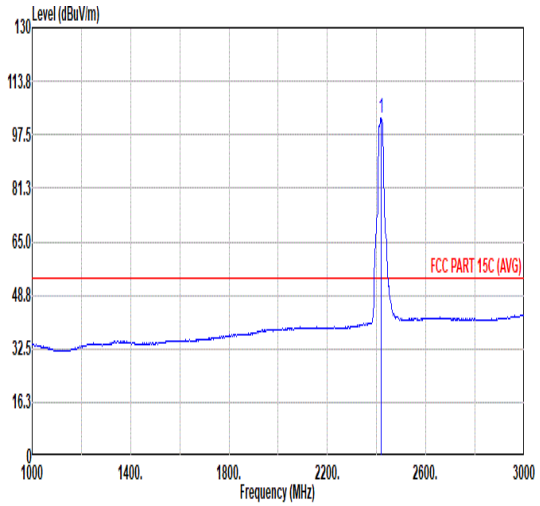

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.95	61.80	74.00	-12.20	53.54	32.20	7.11	37.05	6.00	187	254	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2417.00	111.38	------	------	102.86	32.35	7.16	36.99	6.00	187	254	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.95	50.00	54.00	-4.00	41.74	32.20	7.11	37.05	6.00	187	254	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2417.00	102.70	------	------	94.21	32.34	7.15	37.00	6.00	187	254	AVERAGE

Mode	19
	Harmonic
	2400-2483.5_802.11ax HE20_CH2_Full RU _2417MHz
ANT	6+3

Pol.	Horizontal	Vertical
Peak Avg	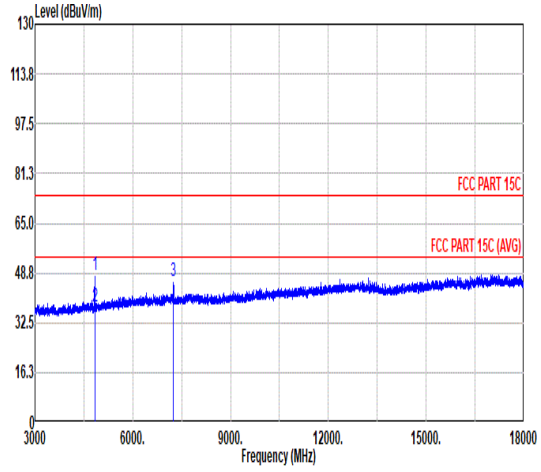	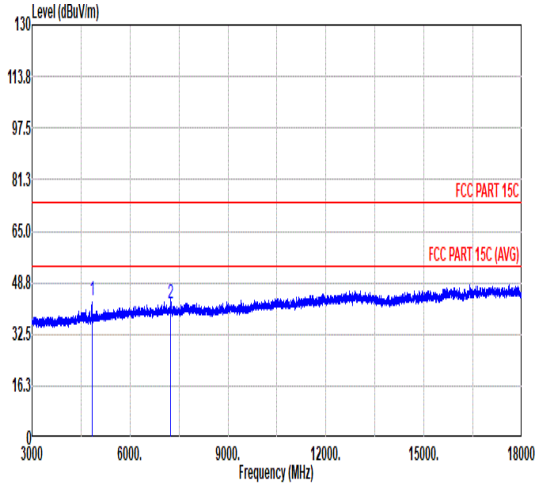

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4834.00	48.13	74.00	-25.87	69.28	34.11	10.24	65.50	0.00	300	0	PEAK
2	4834.00	38.00	54.00	-16.00	59.15	34.11	10.24	65.50	0.00	300	0	AVERAGE
3	7251.00	45.87	74.00	-28.13	63.59	35.70	12.72	66.14	0.00	---	---	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4834.00	43.38	74.00	-30.62	64.53	34.11	10.24	65.50	0.00	---	---	PEAK
2	7251.00	42.33	74.00	-31.67	60.05	35.70	12.72	66.14	0.00	---	---	PEAK

Mode	20	
	Band Edge	
	2400-2483.5_802.11ax HE20_CH10_Full RU _2457MHz	
ANT	6+3	
Pol.	Horizontal	Fundamental
Peak	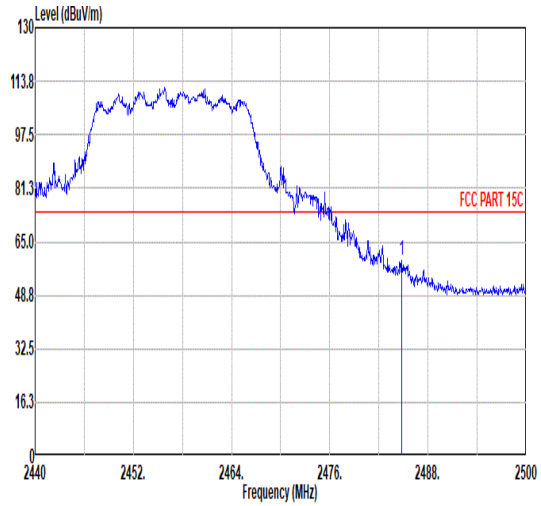 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2484.76 59.32 74.00 -14.68 50.44 32.47 7.26 36.85 6.00 300 10 PEAK	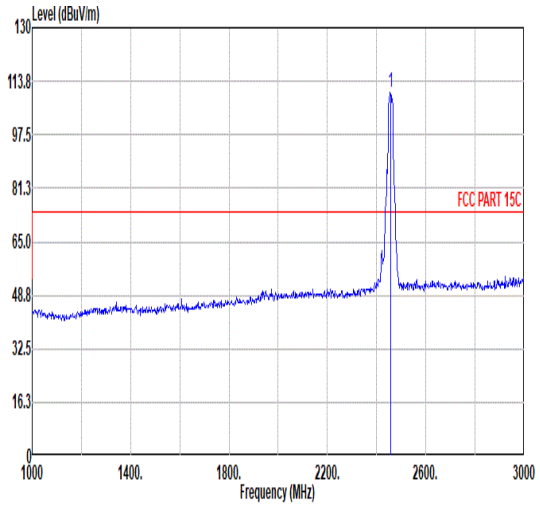 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2457.00 110.52 ------ ------ 101.82 32.41 7.21 36.92 6.00 300 10 PEAK
Avg	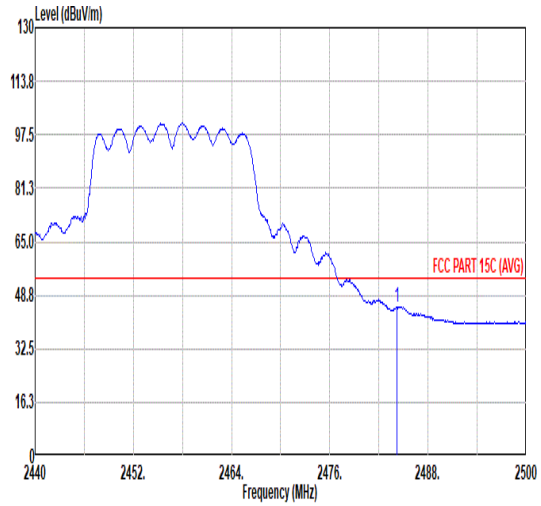 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2484.16 45.11 54.00 -8.89 36.23 32.47 7.26 36.85 6.00 300 10 AVERAGE	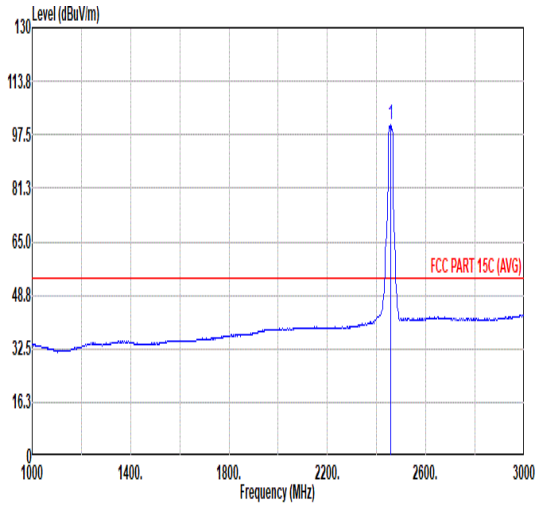 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2457.00 100.75 ------ ------ 92.03 32.42 7.21 36.91 6.00 300 10 AVERAGE

Mode	20	
	Band Edge	
	2400-2483.5_802.11ax HE20_CH10_Full RU _2457MHz	
ANT	6+3	
Pol.	Vertical	Fundamental
Peak	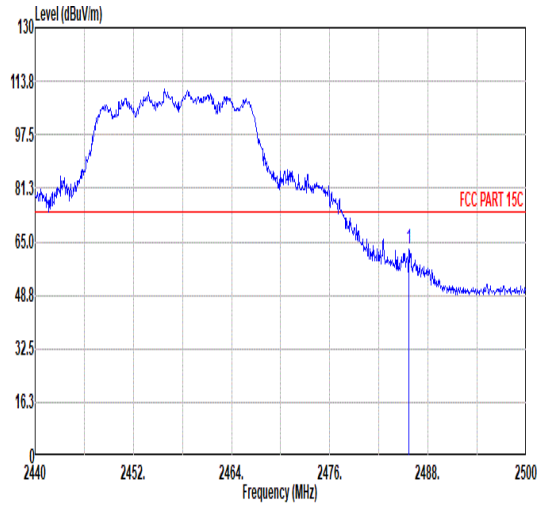	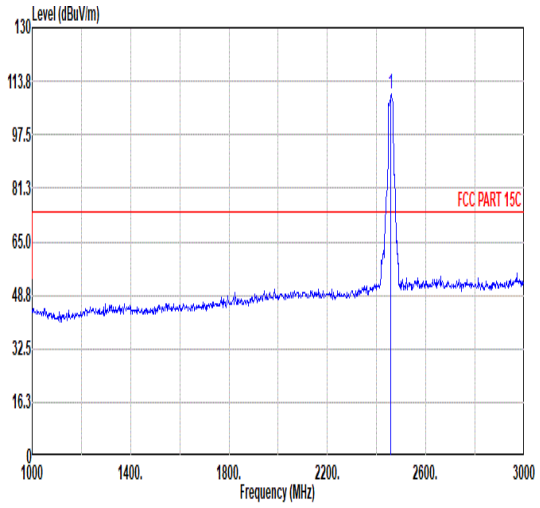
Avg	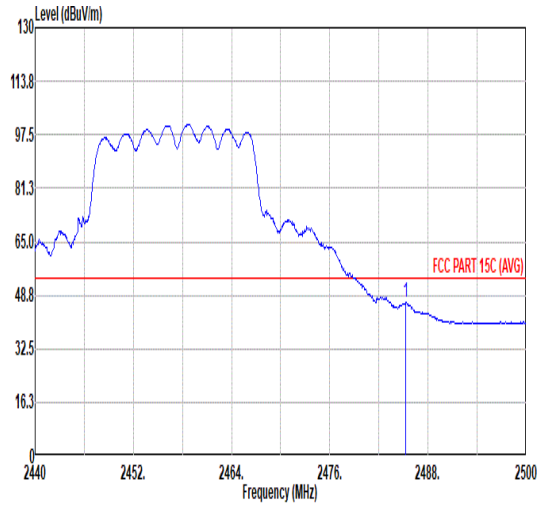	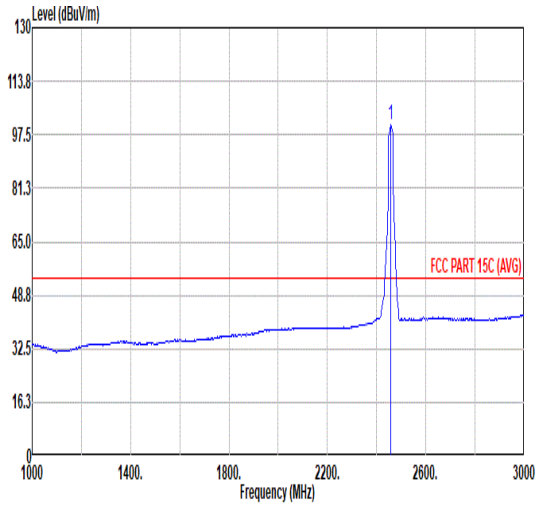

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2485.66	62.80	74.00	-11.20	53.91	32.47	7.26	36.84	6.00	103	288	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2457.00	109.75	------	------	101.01	32.42	7.22	36.90	6.00	103	288	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2485.30	46.67	54.00	-7.33	37.78	32.47	7.26	36.84	6.00	103	288	AVERAGE

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2457.00	100.47	------	------	91.75	32.42	7.21	36.91	6.00	103	288	AVERAGE

Mode	20	
	Harmonic	
	2400-2483.5_802.11ax HE20_CH10_Full RU _2457MHz	
ANT	6+3	
Pol.	Horizontal	Vertical
Peak Avg	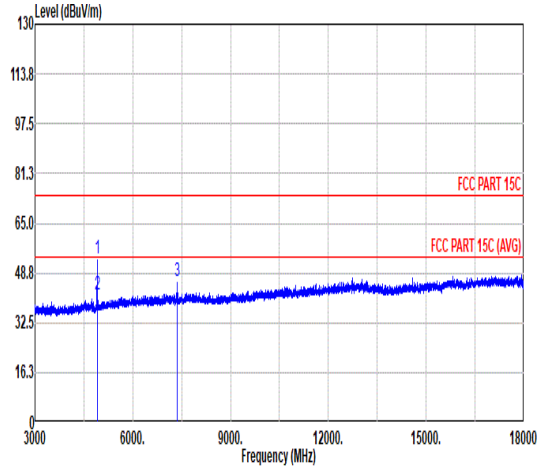	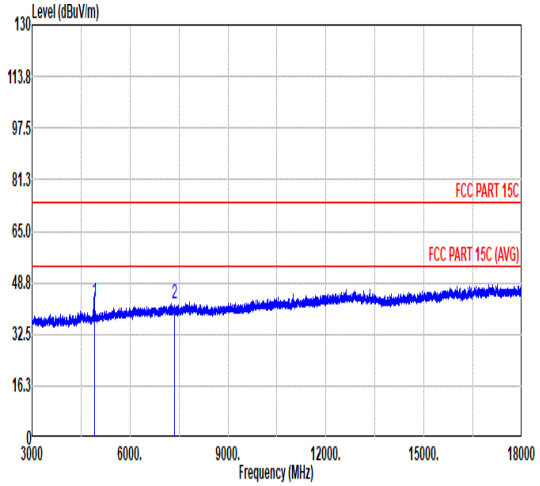

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4914.00	53.34	74.00	-20.66	74.38	34.18	10.34	65.56	0.00	282	39	PEAK
2	4914.00	41.67	54.00	-12.33	62.71	34.18	10.34	65.56	0.00	282	39	AVERAGE
3	7371.00	45.91	74.00	-28.09	63.83	35.80	12.73	66.45	0.00	---	---	PEAK

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4914.00	42.91	74.00	-31.09	63.95	34.18	10.34	65.56	0.00	---	---	PEAK
2	7371.00	42.23	74.00	-31.77	60.15	35.80	12.73	66.45	0.00	---	---	PEAK

Mode	21	
	Band Edge - L	
	CO-TX	
Pol.	Horizontal	Fundamental

Peak

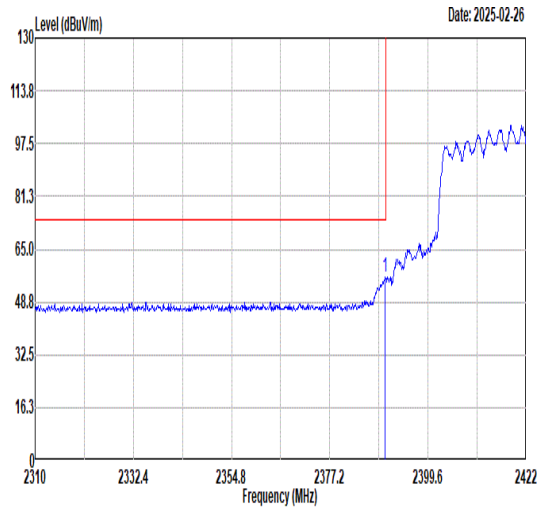

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2389.86	56.22	74.00	-17.78	54.68	30.44	4.80	33.70	100	289	PEAK

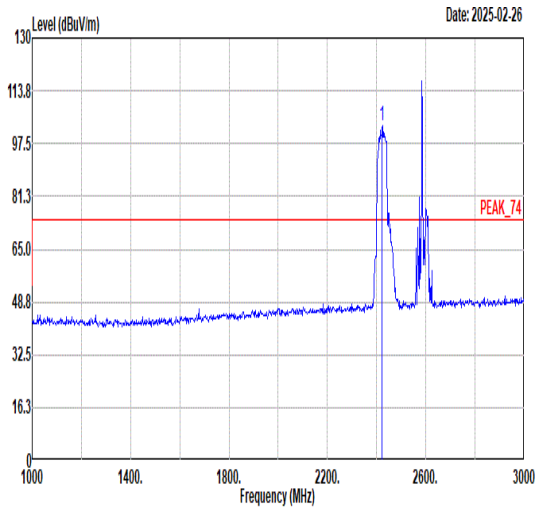

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2422.00	103.00	------	------	100.73	30.64	5.06	33.43	100	289	PEAK

Avg

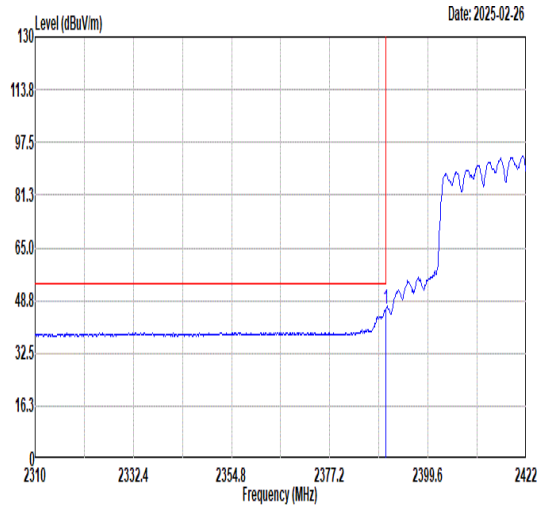

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2389.97	46.03	54.00	-7.97	44.49	30.44	4.80	33.70	100	289	AVERAGE

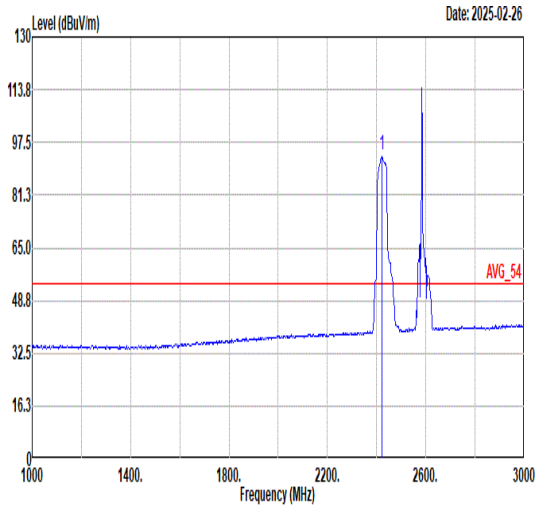

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2422.00	93.52	------	------	91.25	30.64	5.06	33.43	100	289	AVERAGE

Mode	21	
	Band Edge - R	
	CO-TX	
Pol.	Horizontal	Fundamental
Peak	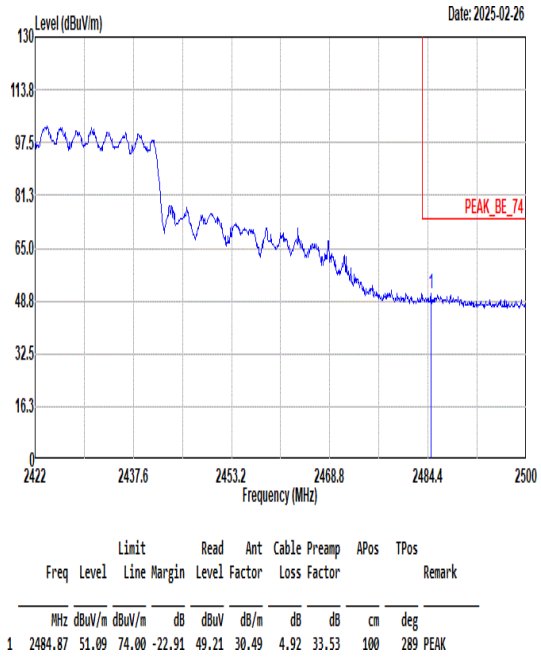 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 2484.87 51.09 74.00 -22.91 49.21 30.49 4.92 33.53 100 289 PEAK	Blank
Avg	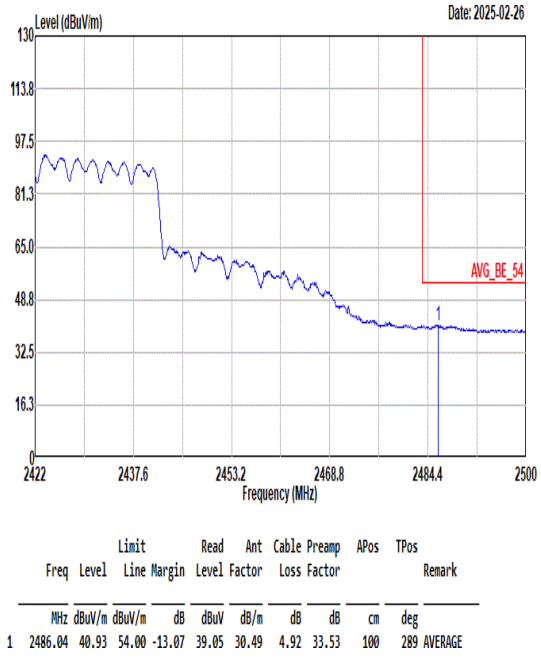 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 2486.04 40.93 54.00 -13.07 39.05 30.49 4.92 33.53 100 289 AVERAGE	Blank

Mode	21	
	Band Edge - L	
	CO-TX	
Pol.	Vertical	Fundamental
Peak	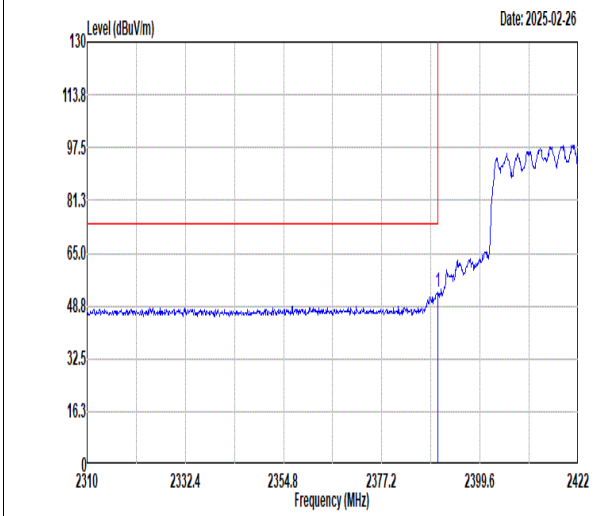	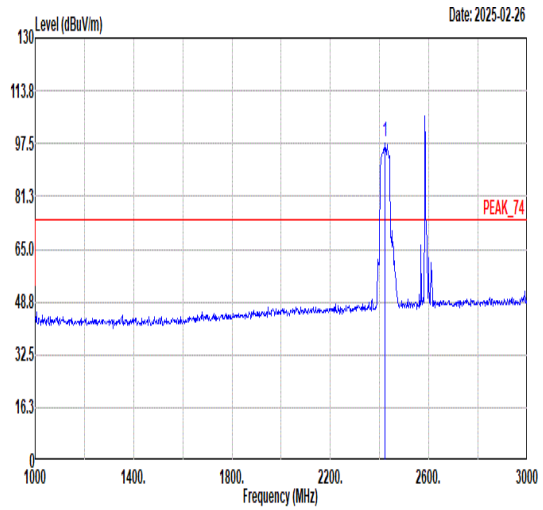
Avg	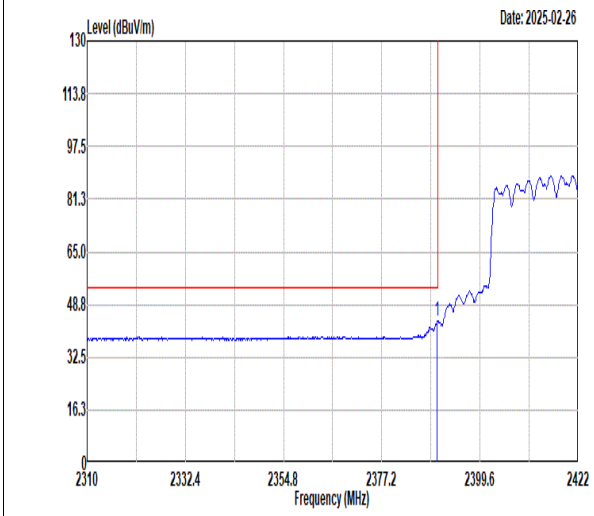	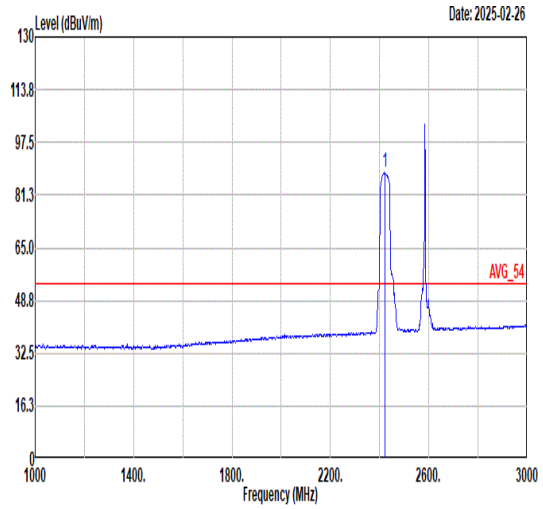

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2389.97	52.99	74.00	-21.01	51.45	30.44	4.80	33.70	400	195	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2422.00	98.12	------	------	95.85	30.64	5.06	33.43	400	195	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2389.86	43.55	54.00	-10.45	42.01	30.44	4.80	33.70	400	195	AVERAGE

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2422.00	88.15	------	------	85.88	30.64	5.06	33.43	400	195	AVERAGE

Mode	21	
	Band Edge - R	
	CO-TX	
Pol.	Vertical	Fundamental
Peak	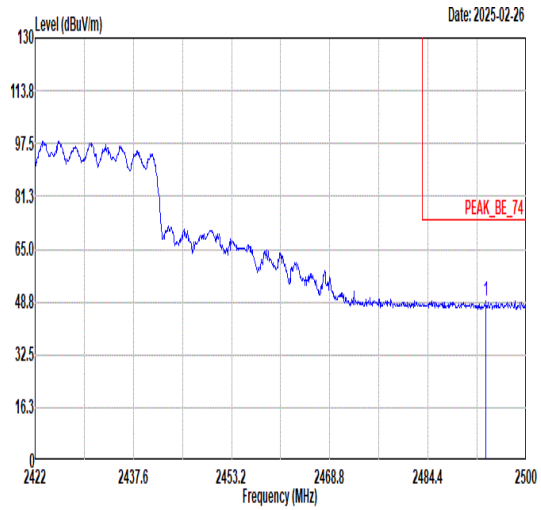 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 2493.60 49.12 74.00 -24.88 47.21 30.50 4.93 33.52 400 195 PEAK	Blank
Avg	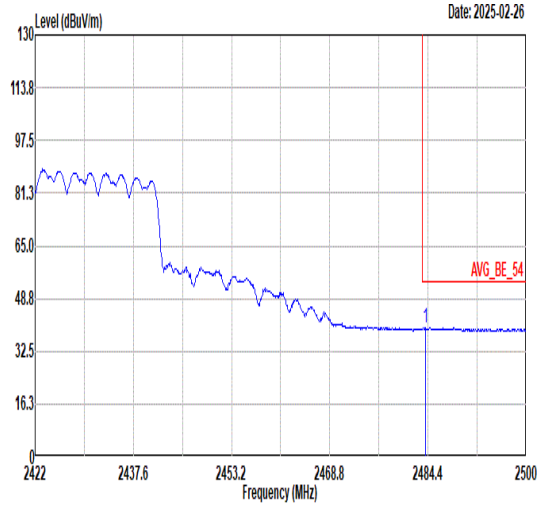 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 2484.01 39.84 54.00 -14.16 37.96 30.49 4.92 33.53 400 195 AVERAGE	Blank

Mode	21
	Harmonic
	CO-TX

Pol.	Horizontal	Vertical

Peak

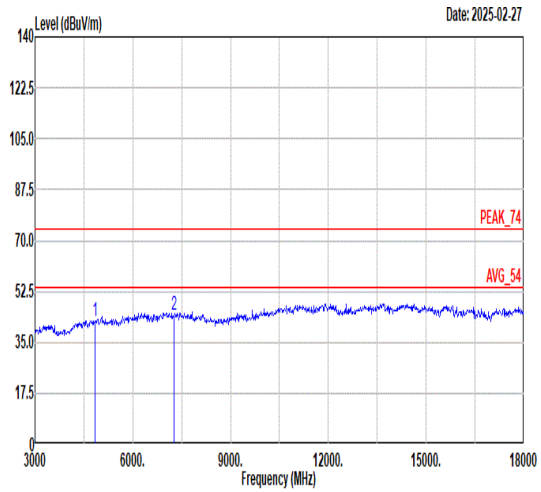

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	4844.00	42.27	74.00	-31.73	58.16	33.84	7.76	57.49	189	176	Peak
2	7266.00	44.14	74.00	-29.86	57.96	36.30	8.79	58.91	215	312	Peak

Avg

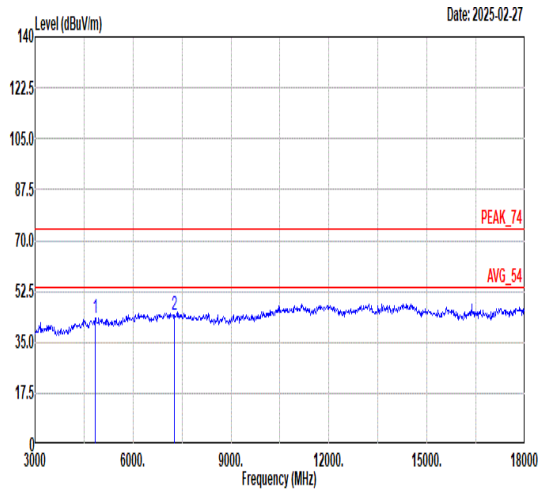

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	4844.00	43.42	74.00	-30.58	59.31	33.84	7.76	57.49	196	266	Peak
2	7266.00	44.25	74.00	-29.75	58.07	36.30	8.79	58.91	275	312	Peak

Mode	22	
	Band Edge - L	
	CO-TX	
Pol.	Horizontal	Fundamental

Peak

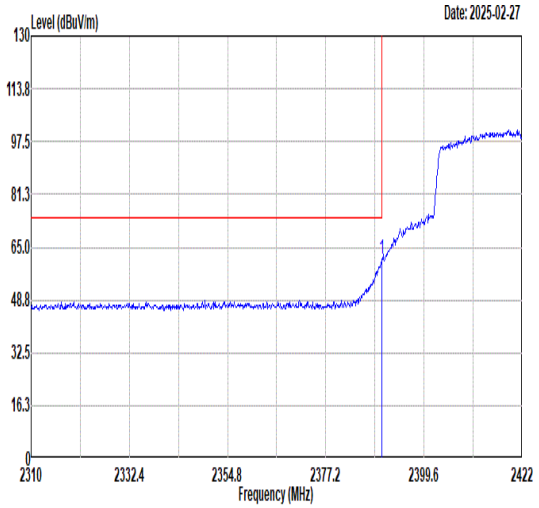

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2389.97	61.56	74.00	-12.44	60.02	30.44	4.80	33.70	173	122	PEAK

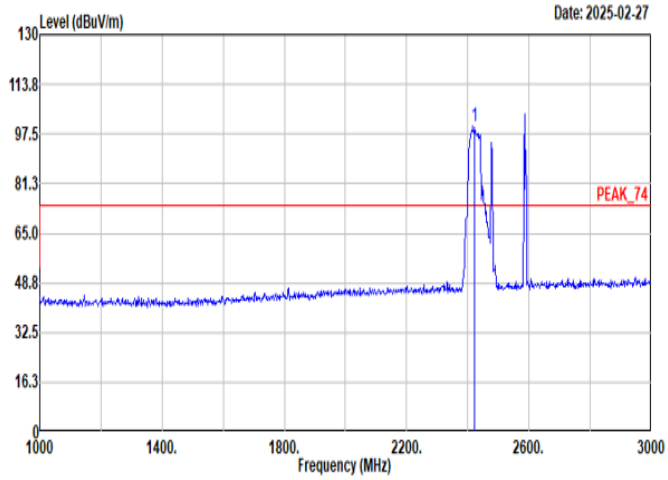

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2422.00	100.13	74.00	26.13	98.51	30.45	4.83	33.66	173	122	PEAK

Avg

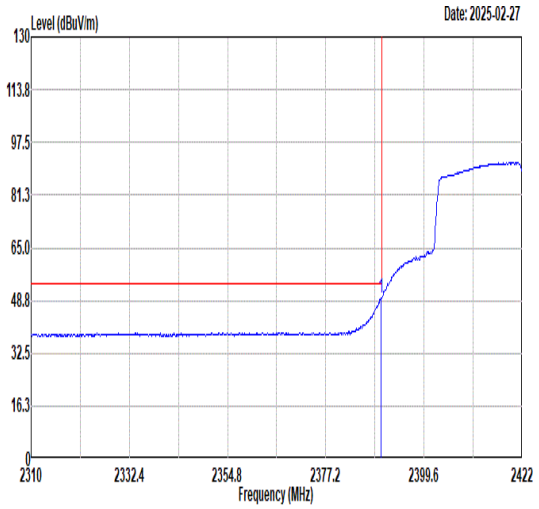

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2389.86	49.74	54.00	-4.26	48.20	30.44	4.80	33.70	173	122	AVERAGE

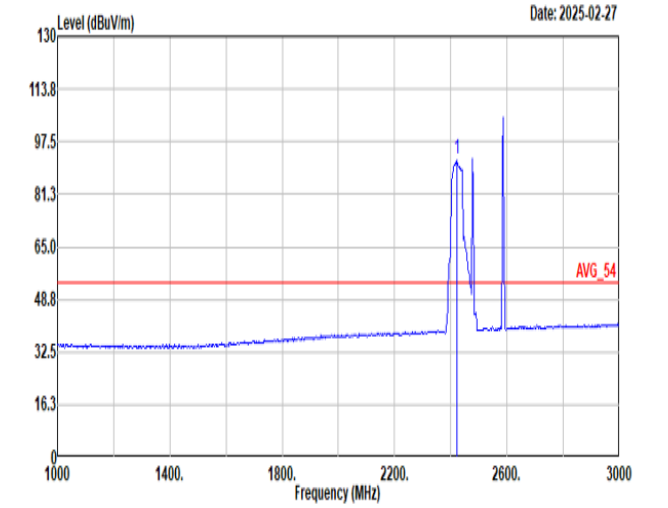

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2422.00	92.42	54.00	38.42	90.56	30.49	4.91	33.54	173	122	AVERAGE

Mode	22	
	Band Edge - R	
	CO-TX	
Pol.	Horizontal	Fundamental
Peak	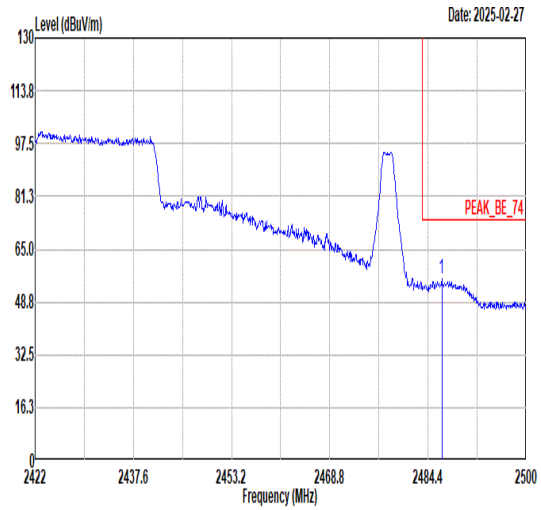 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 2486.58 55.69 74.00 -18.31 53.81 30.49 4.92 33.53 173 122 PEAK	Blank
Avg	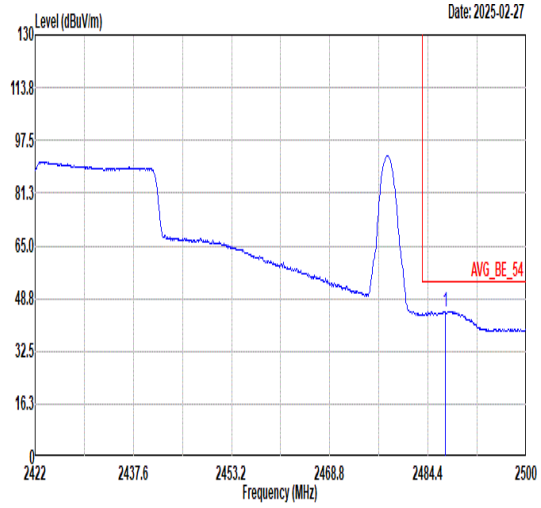 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 2487.13 44.87 54.00 -9.13 42.98 30.49 4.93 33.53 173 122 AVERAGE	Blank