Mode	53	
	Band Edge	
	U-NII-2C_5.25-5.35_802.11be EHT20_CH100_RU106/53_5500MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	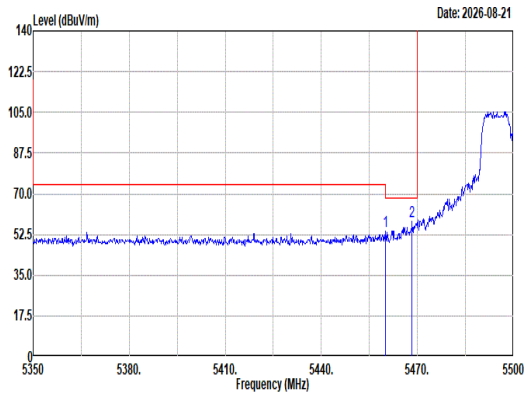 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.95 53.64 74.00 -20.36 45.15 32.84 11.88 36.23 0.00 100 306 Peak 2 5468.35 57.92 68.20 -10.28 49.39 32.87 11.89 36.23 0.00 100 306 Peak	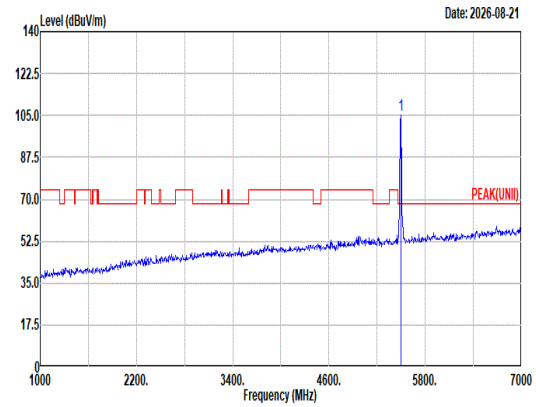 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 105.30 ------ ------ 96.64 32.98 11.91 36.23 0.00 100 306 Peak
Avg	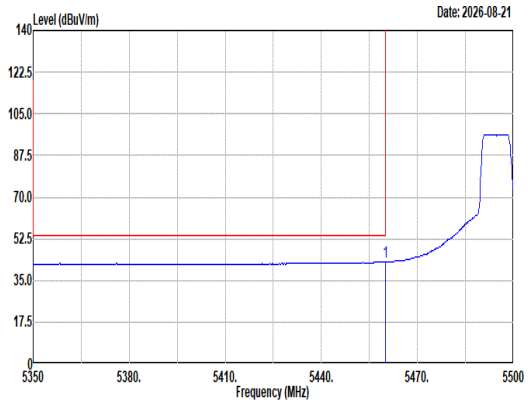 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.95 42.77 54.00 -11.23 34.28 32.84 11.88 36.23 0.00 100 306 Average	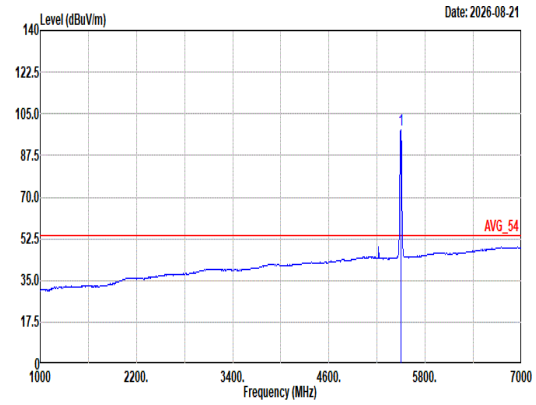 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 98.12 ------ ------ 89.46 32.98 11.91 36.23 0.00 100 306 Average

Mode	54	
	Band Edge	
	U-NII-2C_5.25-5.35_802.11be EHT20_CH140_RU26/8_5700MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	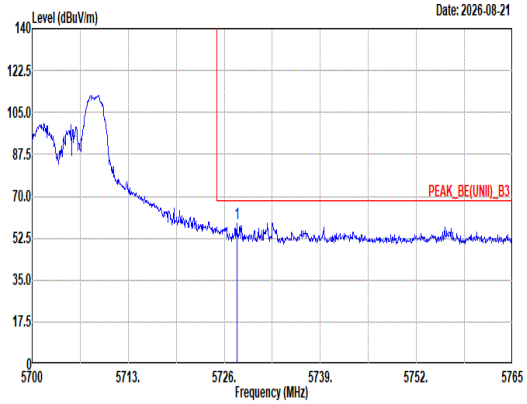 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5727.69 58.60 68.20 -9.60 49.29 33.46 12.14 36.29 0.00 100 325 Peak	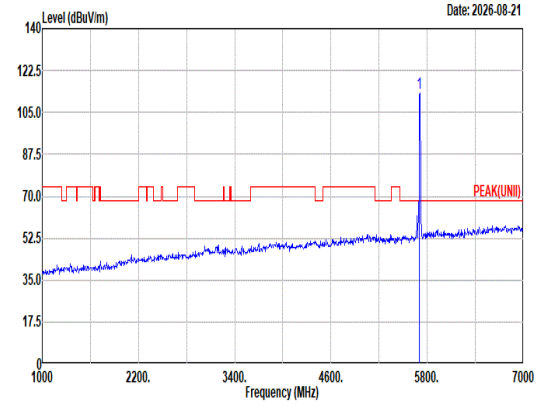 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5700.00 112.85 ------ ------ 103.59 33.42 12.12 36.28 0.00 100 325 Peak
Avg	Blank	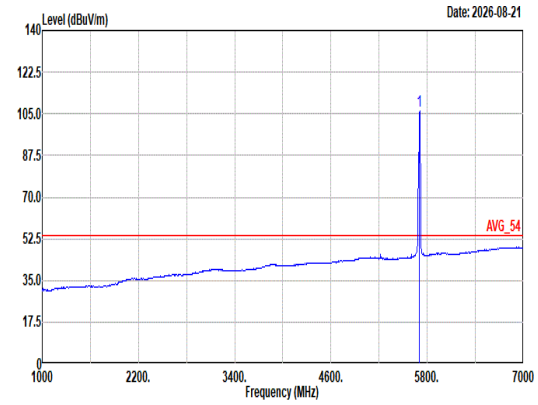 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5700.00 106.07 ------ ------ 96.81 33.42 12.12 36.28 0.00 100 325 Average

Mode	54	
	Band Edge	
	U-NII-2C_5.25-5.35_802.11be EHT20_CH140_RU26/8_5700MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	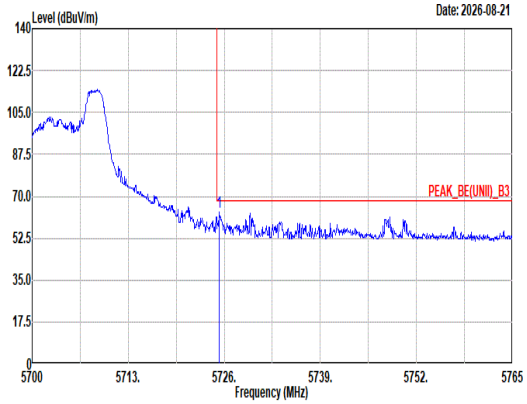 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5725.35 63.28 68.20 -4.92 53.98 33.45 12.14 36.29 0.00 100 156 Peak	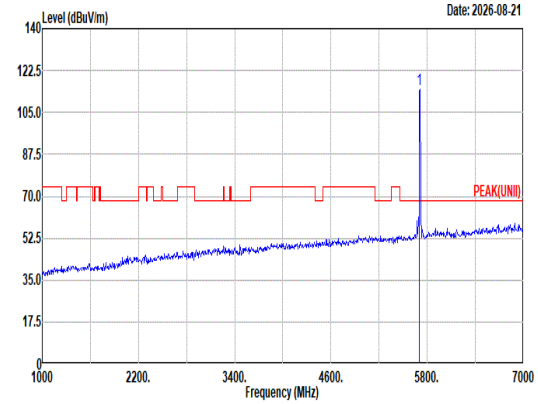 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 114.48 ------ ------ 105.22 33.42 12.12 36.28 0.00 100 156 Peak
Avg	Blank	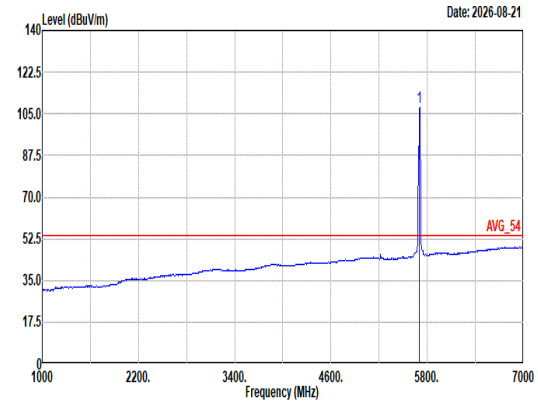 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 107.61 ------ ------ 98.35 33.42 12.12 36.28 0.00 100 156 Average

Mode	55	
	Band Edge	
	U-NII-2C_5.25-5.35_802.11be EHT20_CH140_RU52/40_5700MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	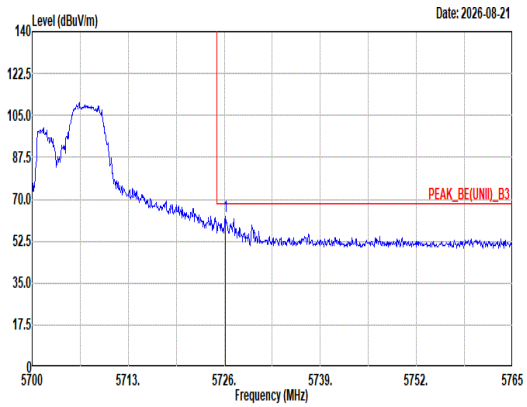 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5726.13 62.98 68.20 -5.22 53.68 33.45 12.14 36.29 0.00 100 326 Peak	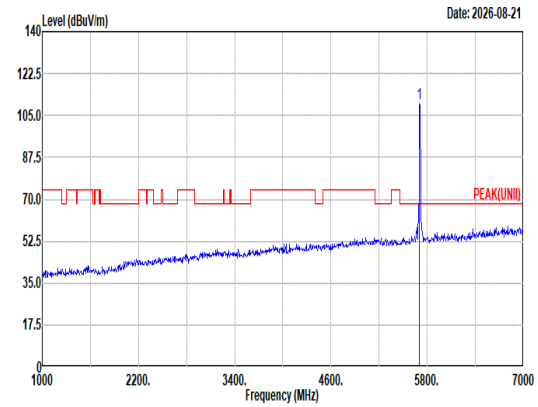 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5700.00 109.97 ------ ------ 100.72 33.41 12.12 36.28 0.00 100 326 Peak
Avg	Blank	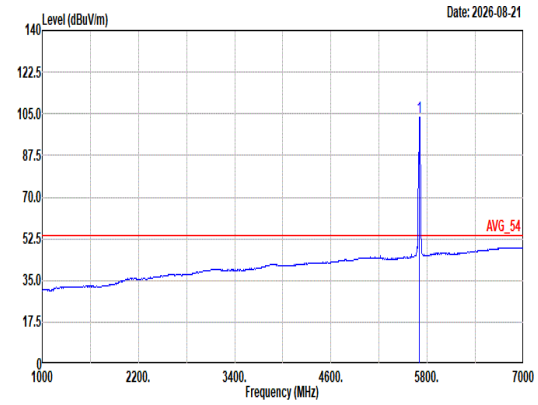 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5700.00 103.73 ------ ------ 94.48 33.41 12.12 36.28 0.00 100 326 Average

Mode	55	
	Band Edge	
	U-NII-2C_5.25-5.35_802.11be EHT20_CH140_RU52/40_5700MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	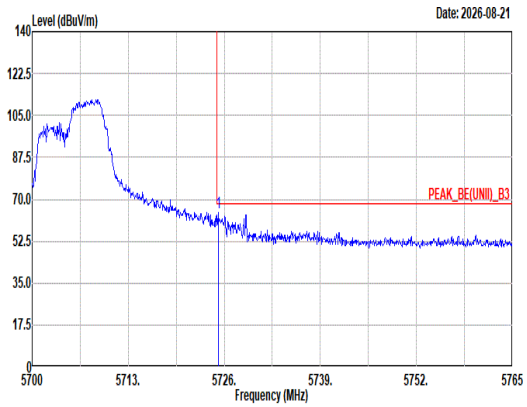 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5725.16 64.22 68.20 -3.98 54.92 33.45 12.14 36.29 0.00 108 154 Peak	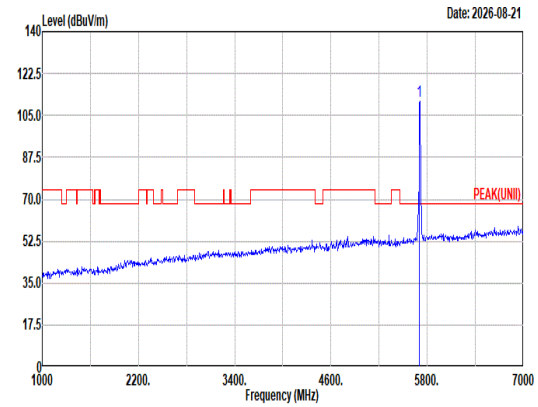 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5700.00 110.76 ------ ------ 101.50 33.42 12.12 36.28 0.00 108 154 Peak
Avg	Blank	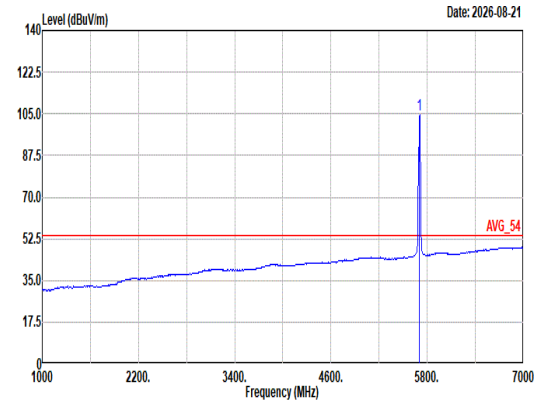 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5700.00 104.66 ------ ------ 95.40 33.42 12.12 36.28 0.00 108 154 Average

Mode	56	
	Band Edge	
	U-NII-2C_5.25-5.35_802.11be EHT20_CH140_RU106/54_5700MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	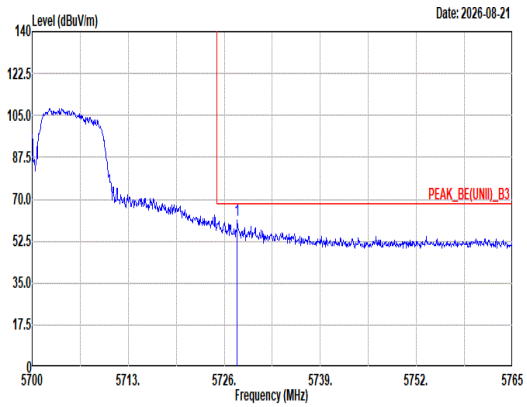 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5727.76 61.34 68.20 -6.86 52.03 33.46 12.14 36.29 0.00 100 309 Peak	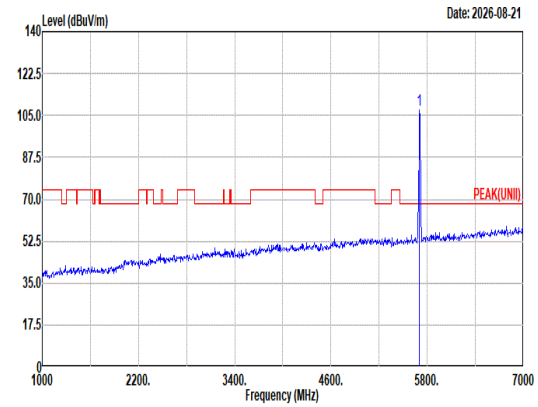 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 107.39 ------ ------ 98.14 33.41 12.12 36.28 0.00 100 309 Peak
Avg	Blank	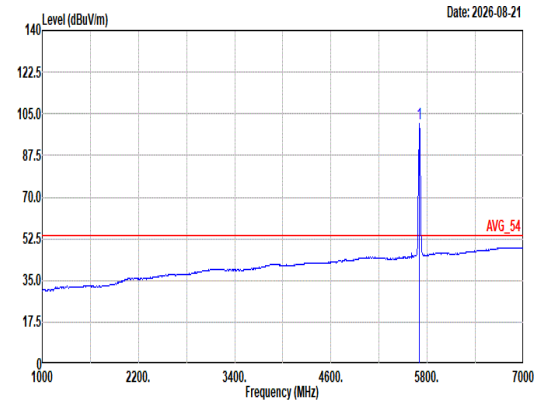 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 100.90 ------ ------ 91.65 33.41 12.12 36.28 0.00 100 309 Average

Mode	56	
	Band Edge	
	U-NII-2C_5.25-5.35_802.11be EHT20_CH140_RU106/54_5700MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	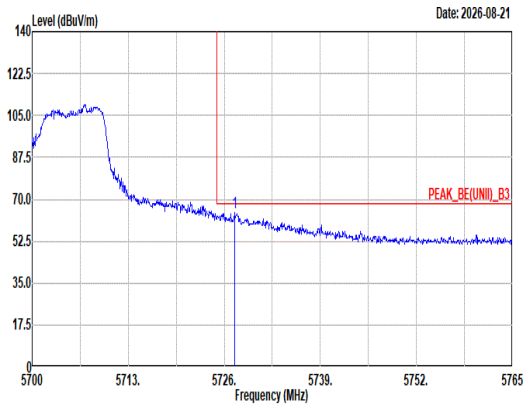 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5727.43 64.67 68.20 -3.53 55.37 33.45 12.14 36.29 0.00 100 155 Peak	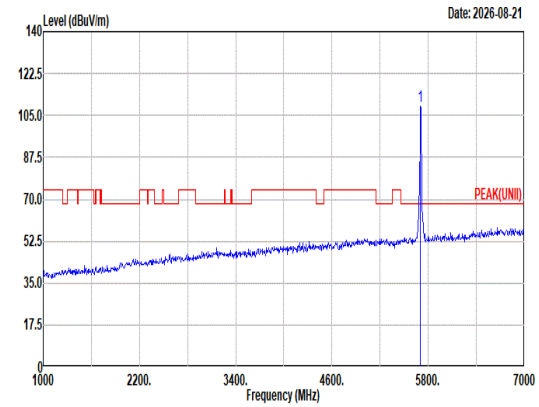 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5700.00 108.74 ------ ------ 99.49 33.41 12.12 36.28 0.00 100 155 Peak
Avg	Blank	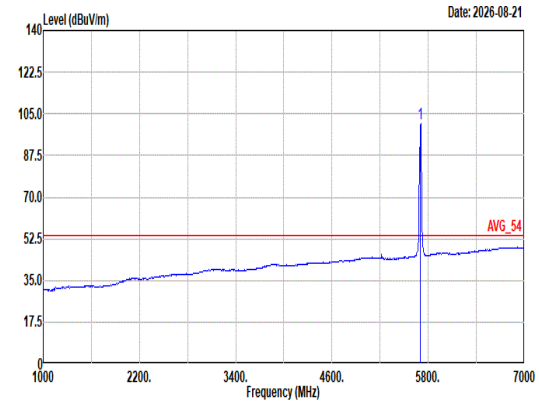 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5700.00 101.04 ------ ------ 91.78 33.42 12.12 36.28 0.00 100 155 Average

Mode	63	
	LF	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH60_Full RU_5300MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
QP/ Peak	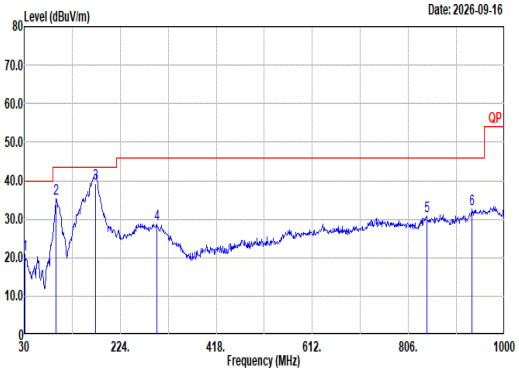	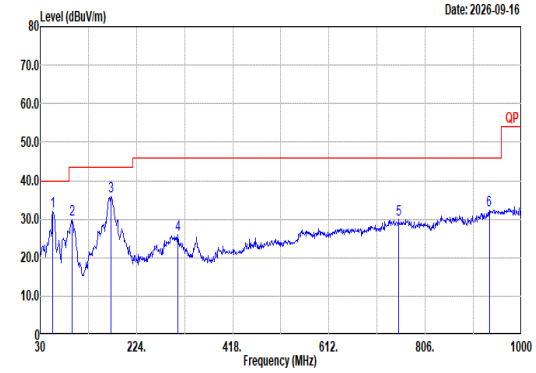

Site : 03CH16-HY
Condition: QP 3m 15Bilog_41912 & 05_260318 HORIZONTAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	30.97	20.79	40.00	-19.21	28.18	23.97	1.04	32.41	0.01	--	--	Peak
2	94.99	35.25	43.50	-8.25	50.57	15.19	1.59	32.14	0.04	--	--	Peak
3	174.53	39.36	43.50	-4.14	53.91	15.51	2.16	32.25	0.03	200	136	QP
4	298.69	28.66	46.00	-17.34	39.33	19.02	2.82	32.57	0.06	--	--	Peak
5	842.86	30.76	46.00	-15.24	29.19	29.05	4.82	32.45	0.15	--	--	Peak
6	934.04	32.50	46.00	-13.50	28.83	30.21	5.09	31.83	0.20	--	--	Peak

Site : 03CH16-HY
Condition: QP 3m 15Bilog_41912 & 05_260318 VERTICAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	55.22	32.12	40.00	-7.88	51.00	12.15	1.17	32.21	0.01	--	--	Peak
2	94.02	29.92	43.50	-13.58	45.38	15.06	1.58	32.14	0.04	--	--	Peak
3	172.59	35.89	43.50	-7.61	50.34	15.65	2.15	32.28	0.03	--	--	Peak
4	307.42	25.83	46.00	-20.17	36.38	19.12	2.86	32.59	0.06	--	--	Peak
5	752.65	29.83	46.00	-16.17	29.13	28.28	4.55	32.27	0.14	--	--	Peak
6	935.01	32.26	46.00	-13.74	28.58	30.21	5.09	31.82	0.20	--	--	Peak

Mode	65	
	SHF	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH60_Full RU_5300MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
Peak	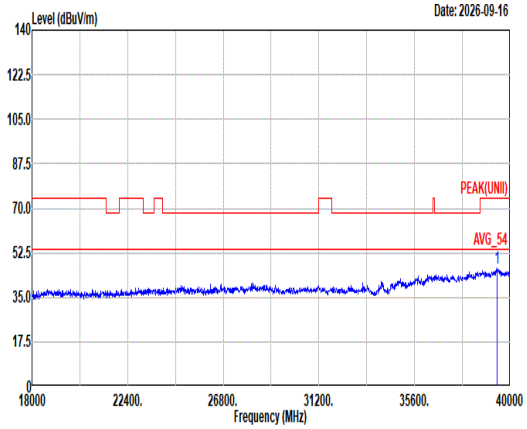 Site : 03CH16-HY Condition: PEAK(UNII) 1m BBHA9170_1230_251105 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 39395.00 46.24 74.00 -27.76 58.38 45.53 8.27 56.40 -9.54 -- -- Peak	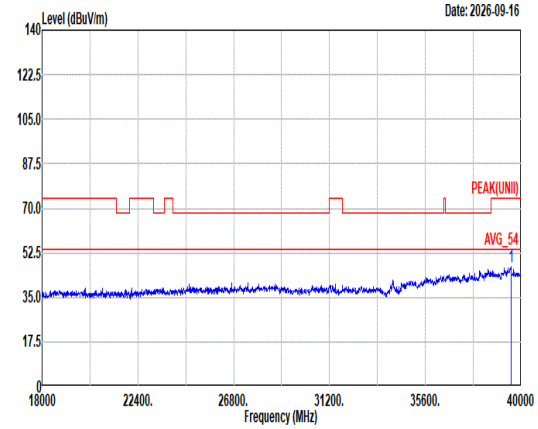 Site : 03CH16-HY Condition: PEAK(UNII) 1m BBHA9170_1230_251105 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 39538.00 46.76 74.00 -27.24 58.96 45.32 8.28 56.26 -9.54 -- -- Peak

Mode	69	
	Band Edge	
	U-NII-1_5.15-5.25_802.11a_CH40_5200MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	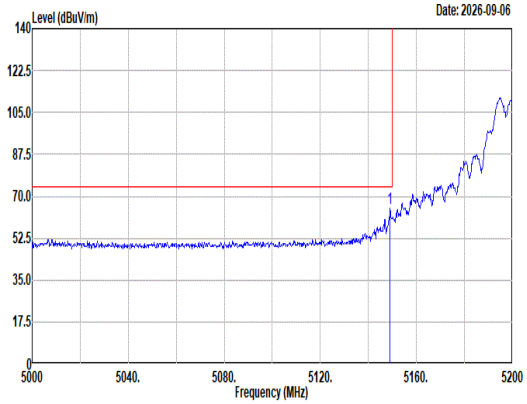 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5149.00 65.22 74.00 -8.78 56.80 33.10 11.51 36.19 0.00 100 307 Peak	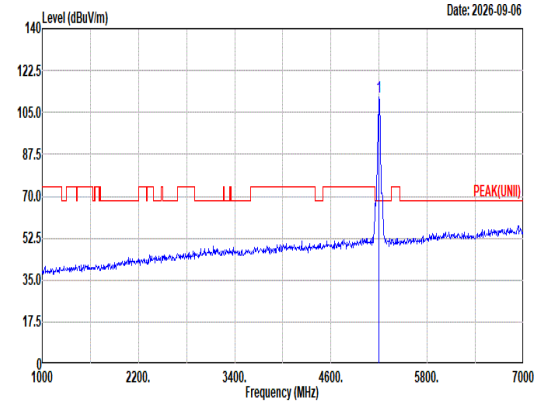 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5200.00 111.67 ------ ------ 103.31 33.01 11.54 36.19 0.00 100 307 Peak
Avg	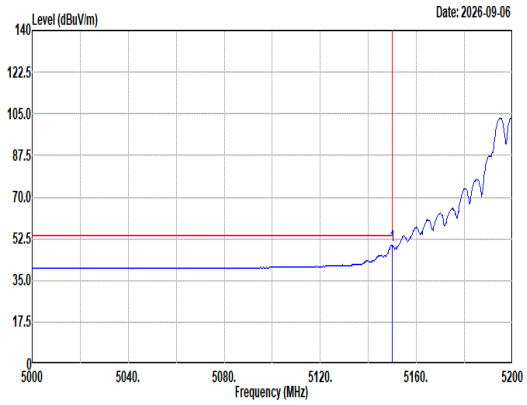 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5149.80 49.73 54.00 -4.27 41.31 33.10 11.51 36.19 0.00 100 307 Average	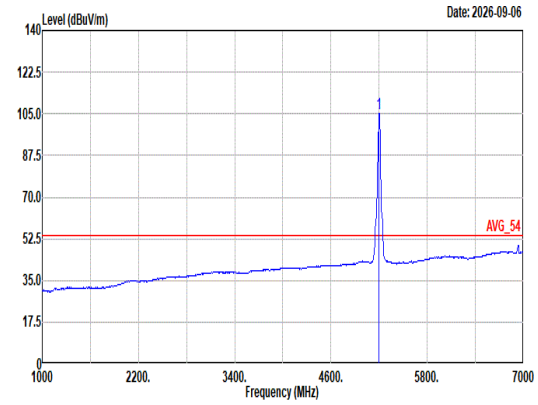 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5200.00 105.08 ------ ------ 96.72 33.00 11.55 36.19 0.00 100 307 Average

Mode	69	
	Band Edge	
	U-NII-1_5.15-5.25_802.11a_CH40_5200MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	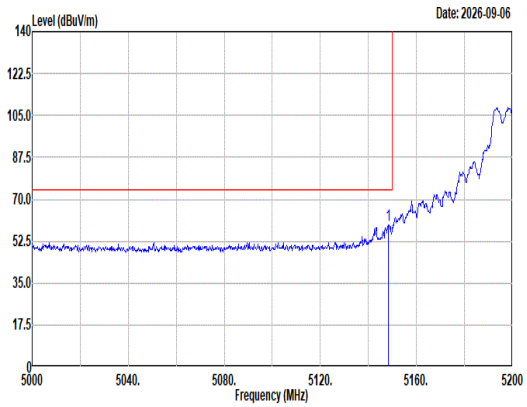 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.20 59.04 74.00 -14.96 50.62 33.10 11.51 36.19 0.00 100 308 Peak	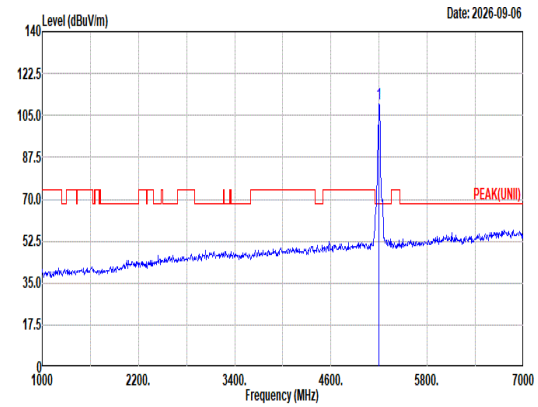 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5200.00 109.96 ------ ------ 101.61 33.00 11.54 36.19 0.00 100 308 Peak
Avg	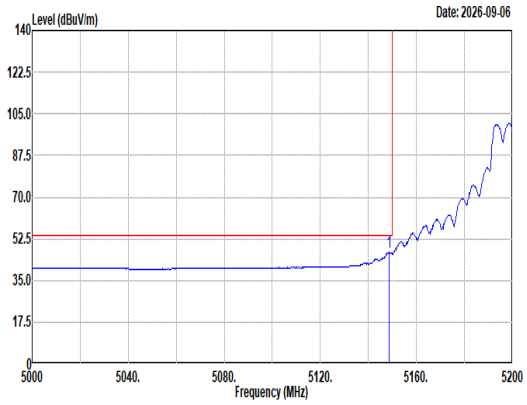 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.60 46.78 54.00 -7.22 38.36 33.10 11.51 36.19 0.00 100 308 Average	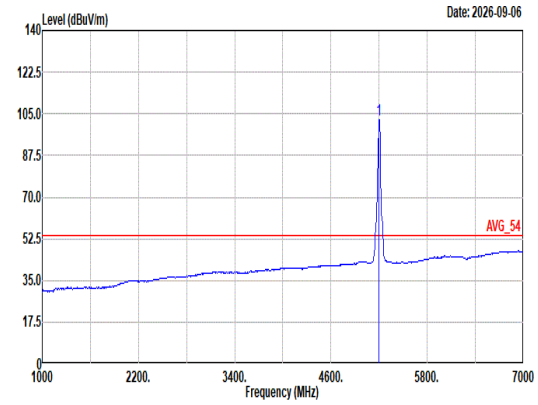 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5200.00 102.51 ------ ------ 94.16 33.00 11.54 36.19 0.00 100 308 Average

Mode	69	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH40_5200MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
Peak Avg	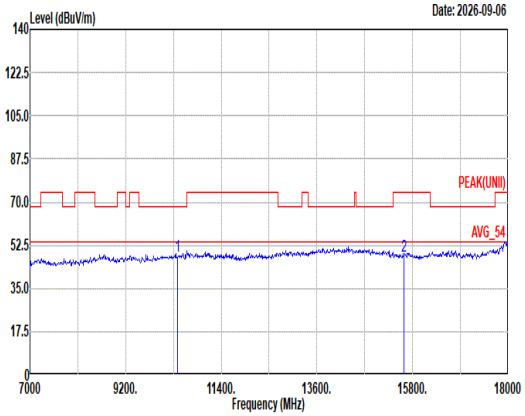 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10400.00 48.28 68.20 -19.92 59.52 38.50 16.13 66.84 0.97 -- -- Peak 2 15600.00 47.91 74.00 -26.09 56.02 37.90 19.80 66.47 0.66 -- -- Peak	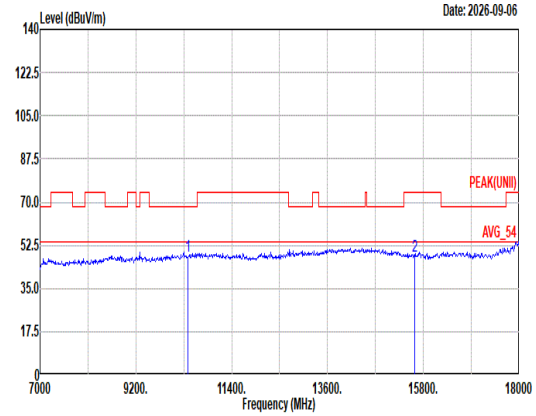 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10400.00 48.13 68.20 -20.07 59.37 38.50 16.13 66.84 0.97 -- -- Peak 2 15600.00 47.93 74.00 -26.07 56.04 37.90 19.80 66.47 0.66 -- -- Peak

Mode	69	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH40_5200MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	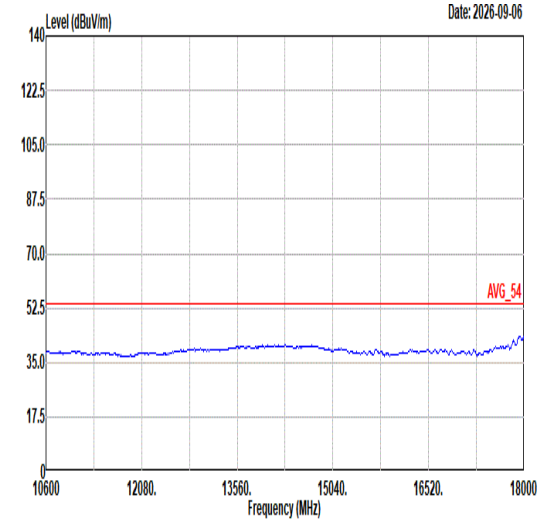 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL	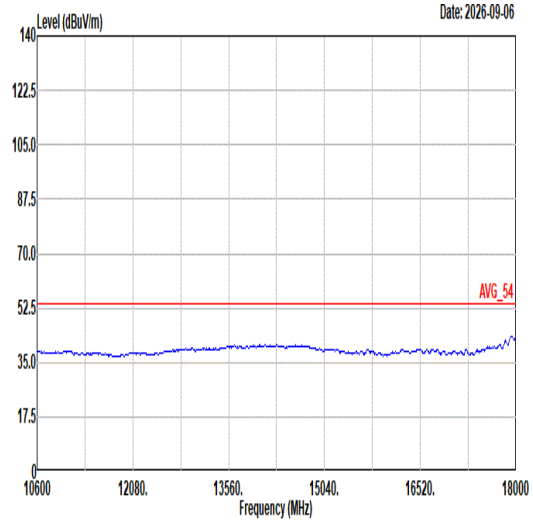 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL

Mode	70	
	Band Edge	
	U-NII-1_5.15-5.25_802.11be EHT20_CH40_Full RU_5200MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	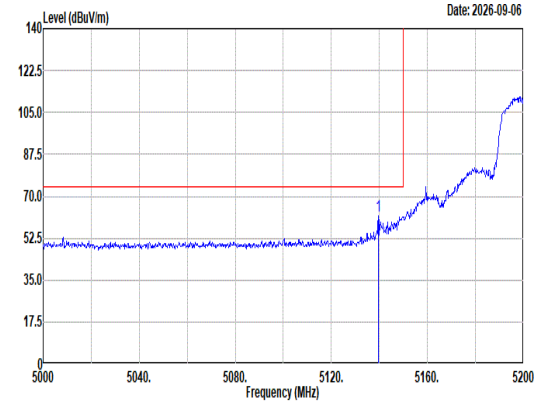 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5139.60 61.79 74.00 -12.21 53.40 33.08 11.50 36.19 0.00 100 306 Peak	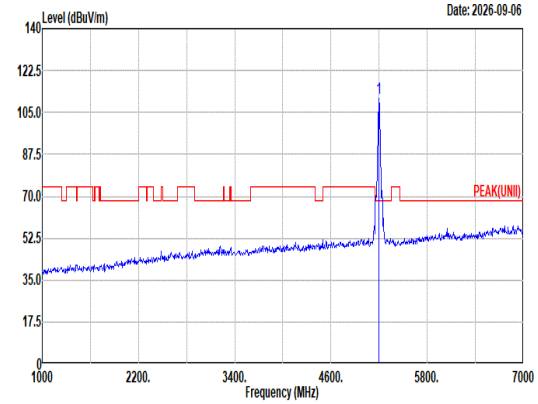 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5200.00 110.94 ------ ------ 102.58 33.01 11.54 36.19 0.00 100 306 Peak
Avg	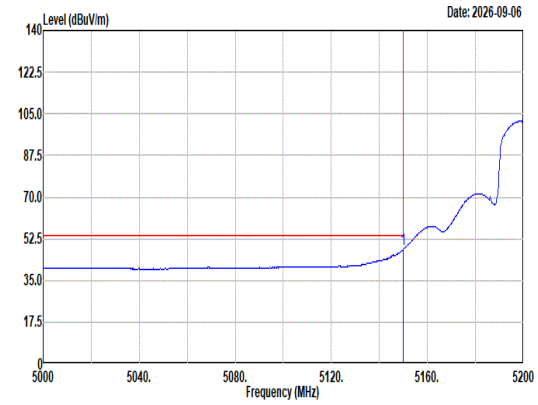 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5150.00 48.13 54.00 -5.87 39.71 33.10 11.51 36.19 0.00 100 306 Average	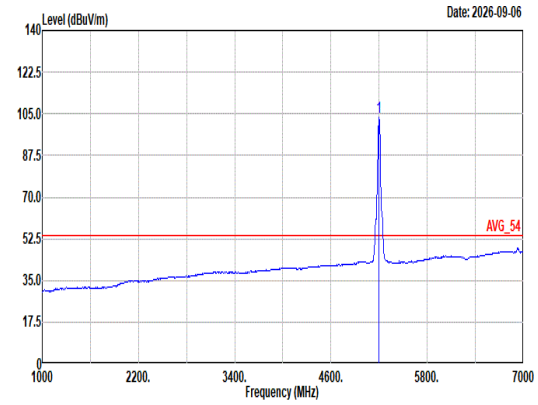 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5200.00 103.69 ------ ------ 95.34 33.00 11.54 36.19 0.00 100 306 Average

Mode	70	
	Band Edge	
	U-NII-1_5.15-5.25_802.11be EHT20_CH40_Full RU_5200MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	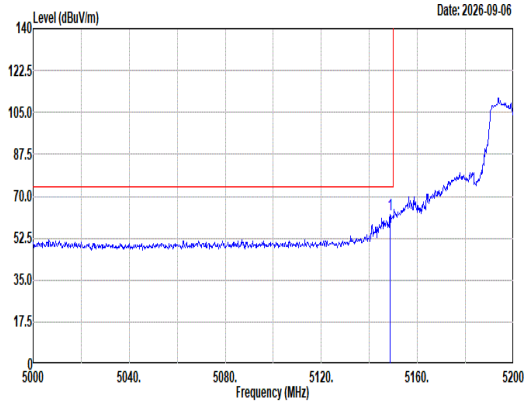 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.60 62.52 74.00 -11.48 54.10 33.10 11.51 36.19 0.00 102 311 Peak	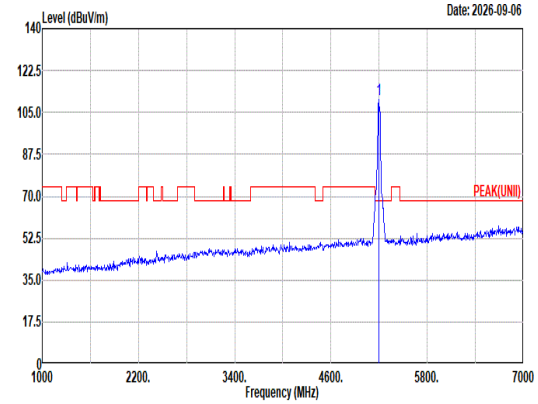 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5200.00 110.27 ------ ------ 101.91 33.01 11.54 36.19 0.00 102 311 Peak
Avg	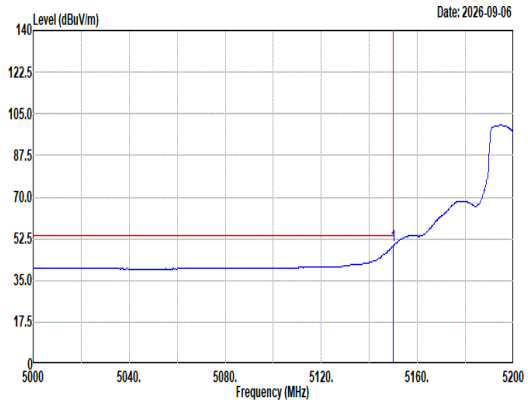 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5150.00 49.53 54.00 -4.47 41.11 33.10 11.51 36.19 0.00 102 311 Average	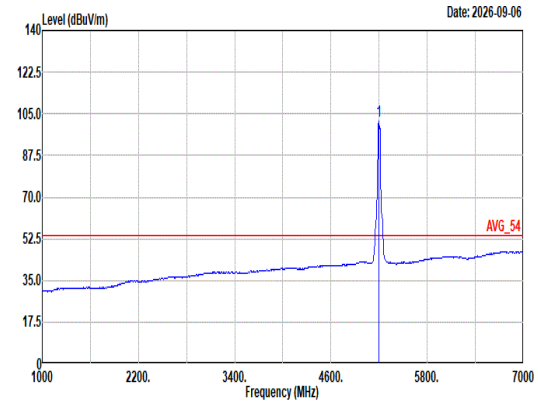 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5200.00 102.06 ------ ------ 93.70 33.01 11.54 36.19 0.00 102 311 Average

Mode	70	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT20_CH40_Full RU_5200MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
Peak Avg	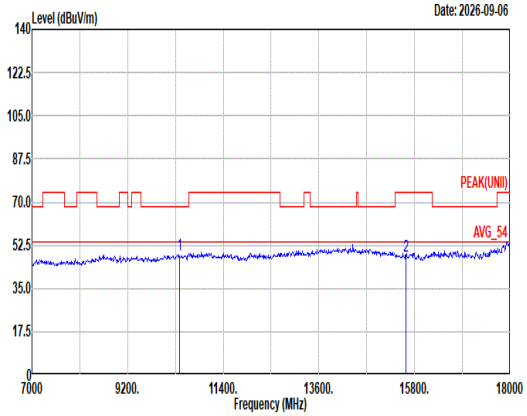 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10400.00 48.53 68.20 -19.67 59.77 38.50 16.13 66.84 0.97 -- -- Peak 2 15600.00 47.94 74.00 -26.06 56.05 37.90 19.80 66.47 0.66 -- -- Peak	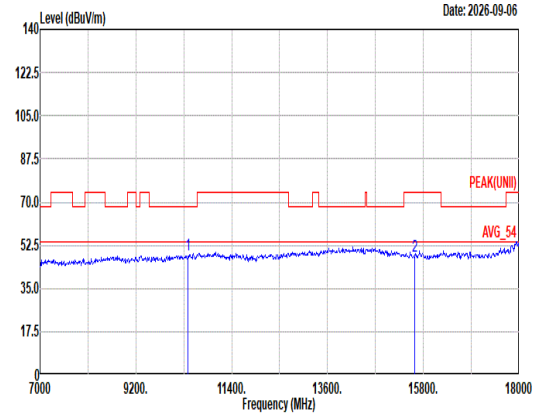 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10400.00 48.41 68.20 -19.79 59.65 38.50 16.13 66.84 0.97 -- -- Peak 2 15600.00 47.98 74.00 -26.02 56.09 37.90 19.80 66.47 0.66 -- -- Peak

Mode	70	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT20_CH40_Full RU_5200MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	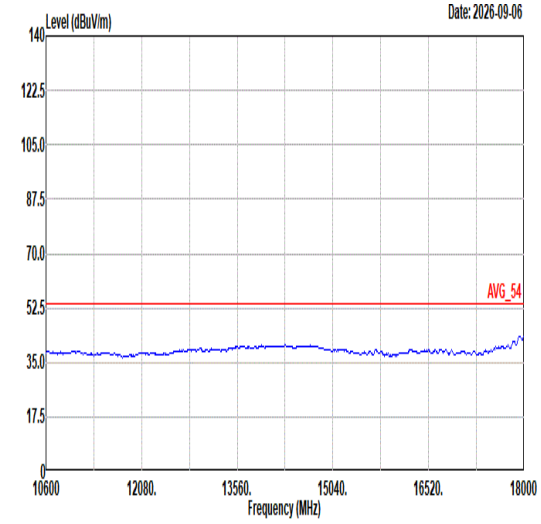 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL	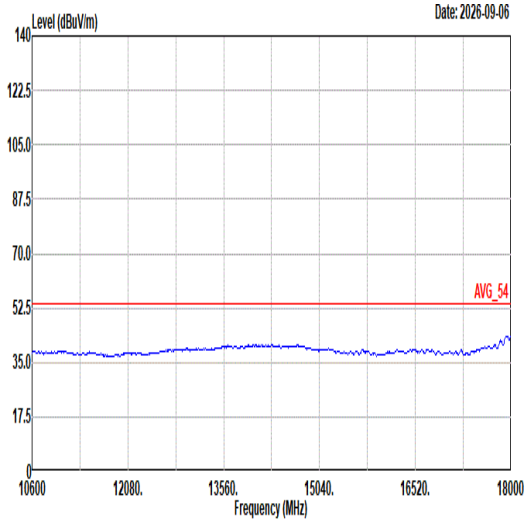 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL

Mode	71	
	Band Edge	
	U-NII-2C_5.25-5.35_802.11be EHT20_CH104_Full RU_5520MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	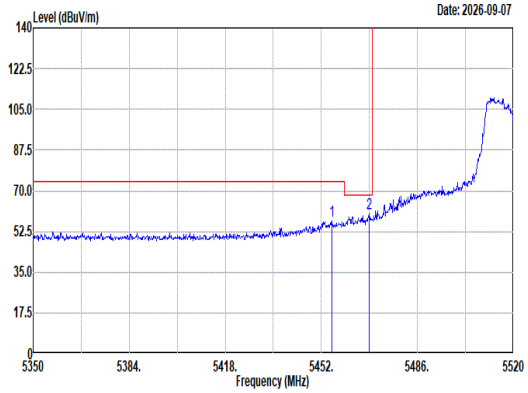 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5455.74 57.23 74.00 -16.77 48.75 32.82 11.88 36.22 0.00 100 13 Peak 2 5469.00 60.37 68.20 -7.83 51.83 32.88 11.89 36.23 0.00 100 13 Peak	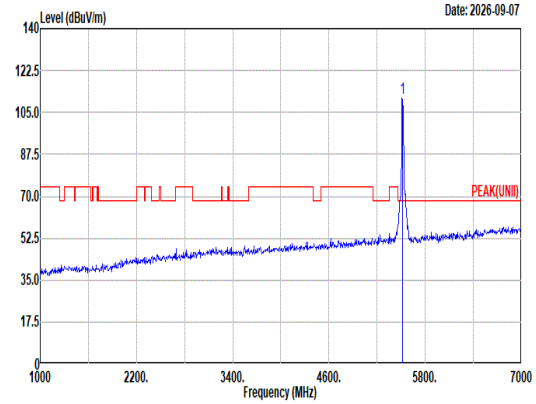 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5520.00 110.97 ------ ------ 102.32 32.95 11.93 36.23 0.00 100 13 Peak
Avg	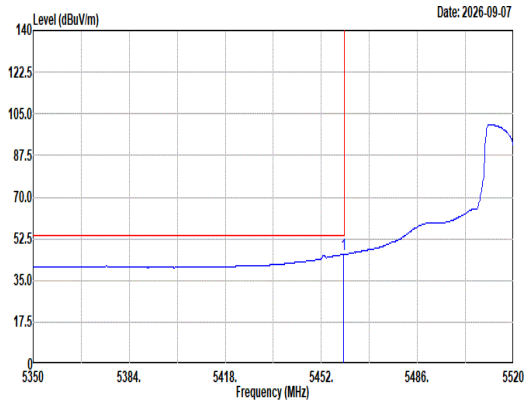 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.99 45.91 54.00 -8.09 37.42 32.84 11.88 36.23 0.00 100 13 Average	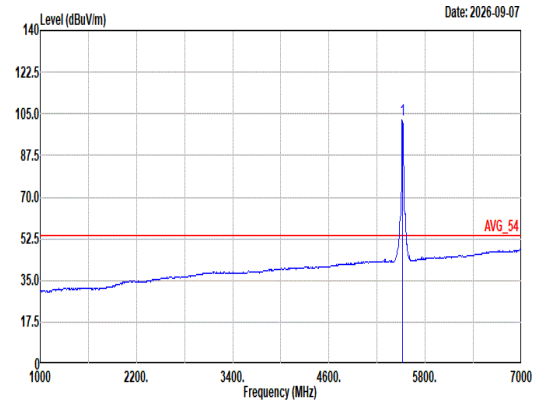 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5520.00 102.24 ------ ------ 93.59 32.95 11.93 36.23 0.00 100 13 Average

Mode	71
	Band Edge
	U-NII-2C_5.25-5.35_802.11be EHT20_CH104_Full RU_5520MHz
ANT	5+4

Pol.	Vertical	Fundamental
Peak	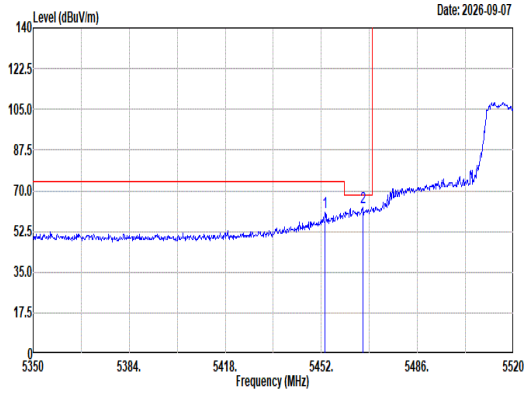 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5453.36 60.51 74.00 -13.49 52.05 32.81 11.87 36.22 0.00 100 164 Peak 2 5466.62 62.96 68.20 -5.24 54.43 32.87 11.89 36.23 0.00 100 164 Peak	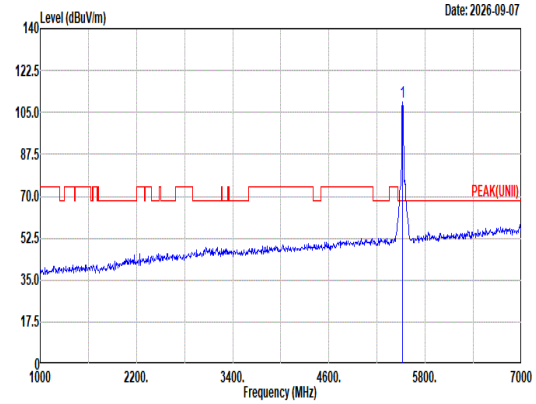 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5520.00 109.20 ------ ------ 100.56 32.93 11.94 36.23 0.00 100 164 Peak
Avg	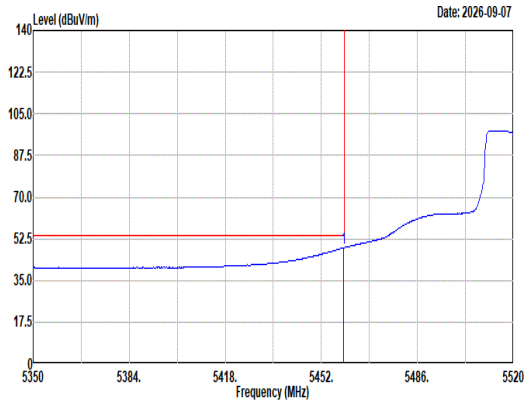 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5459.99 48.79 54.00 -5.21 40.30 32.84 11.88 36.23 0.00 100 164 Average	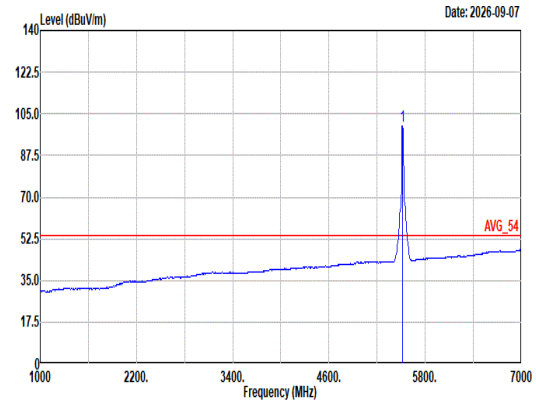 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5520.00 99.81 ------ ------ 91.17 32.93 11.94 36.23 0.00 100 164 Average

Mode	71	
	Harmonic	
	U-NII-2C_5.25-5.35_802.11be EHT20_CH104_Full RU_5520MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
Peak Avg	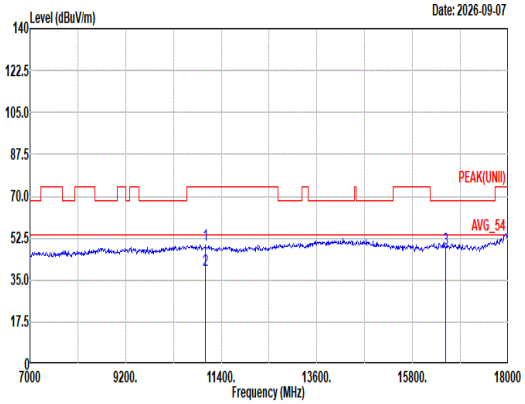 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11040.00 49.77 74.00 -24.23 59.43 38.80 16.57 65.88 0.85 101 83 Peak 2 11040.00 38.96 54.00 -15.04 48.62 38.80 16.57 65.88 0.85 101 83 Average 3 16560.00 48.30 68.20 -19.90 55.96 38.26 20.38 67.03 0.73 -- -- Peak	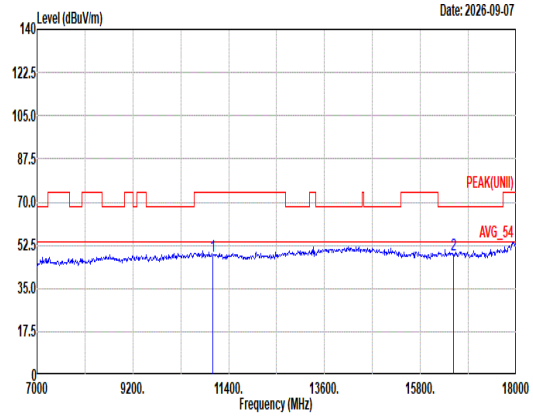 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11040.00 47.84 74.00 -26.16 57.50 38.80 16.57 65.88 0.85 -- -- Peak 2 16560.00 48.61 68.20 -19.59 56.27 38.26 20.38 67.03 0.73 -- -- Peak

Mode	71	
	Harmonic	
	U-NII-2C_5.25-5.35_802.11be EHT20_CH104_Full RU_5520MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	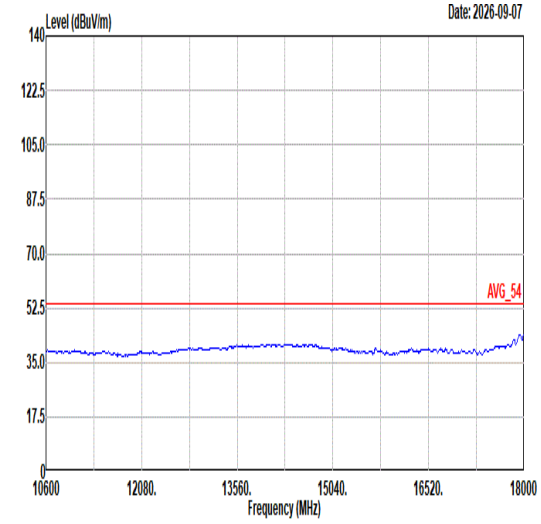 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL	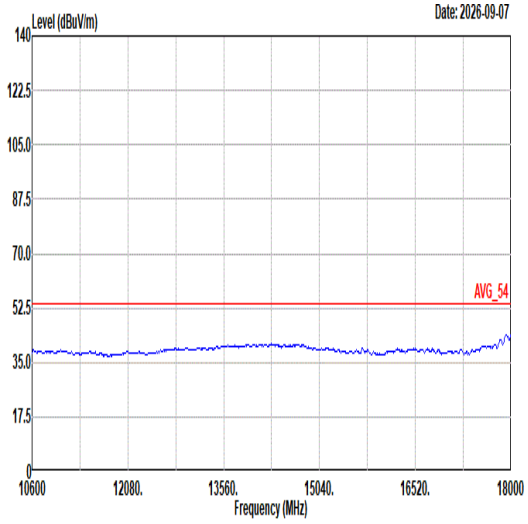 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL

Mode	72	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11be EHT20_CH136_Full RU_5680MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	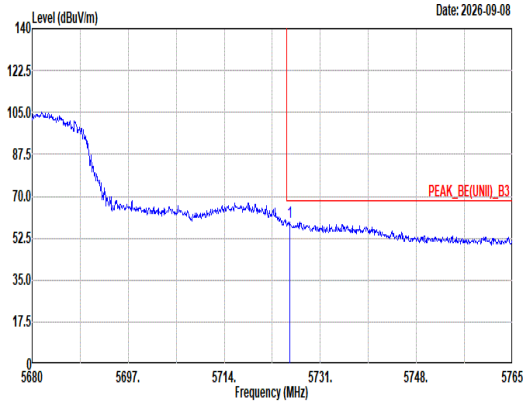 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5725.56 59.40 68.20 -8.80 50.10 33.45 12.14 36.29 0.00 391 124 Peak	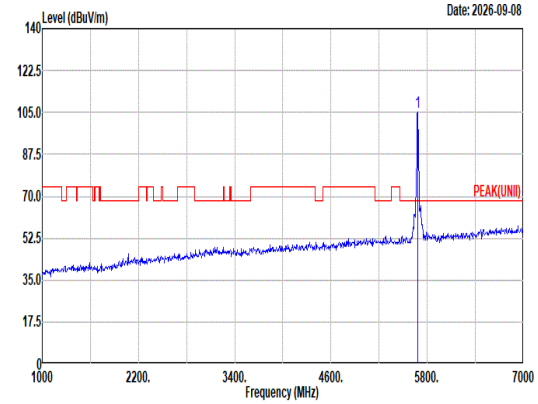 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5680.00 105.20 ------ ------ 96.10 33.28 12.10 36.28 0.00 391 124 Peak
Avg	Blank	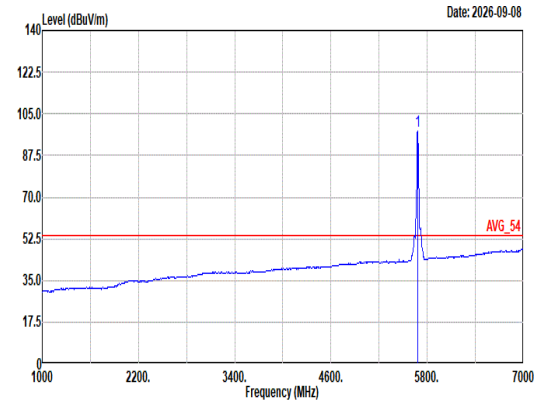 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5680.00 97.58 ------ ------ 88.48 33.28 12.10 36.28 0.00 391 124 Average

Mode	72	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11be EHT20_CH136_Full RU_5680MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	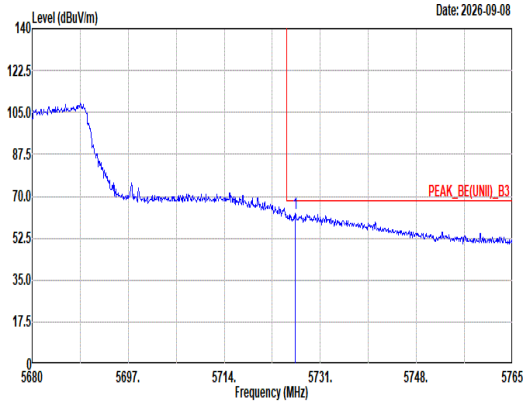 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5726.50 62.70 68.20 -5.50 53.40 33.45 12.14 36.29 0.00 118 160 Peak	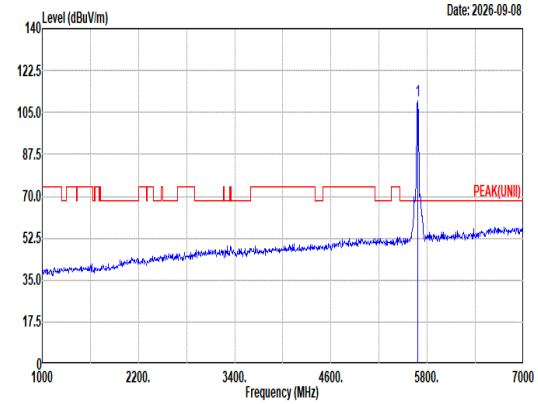 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5680.00 109.82 ------ ------ 100.72 33.28 12.10 36.28 0.00 118 160 Peak
Avg	Blank	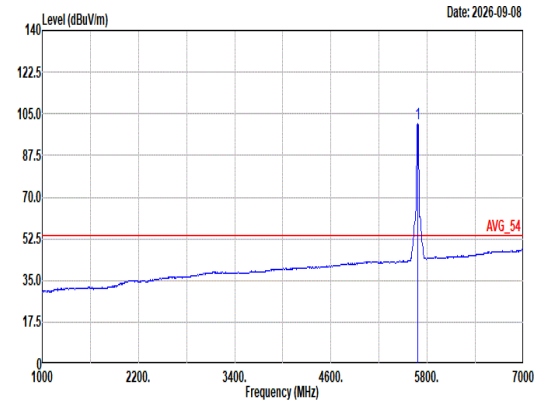 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5680.00 100.77 ------ ------ 91.63 33.32 12.10 36.28 0.00 118 160 Average

Mode	72	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT20_CH136_Full RU_5680MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
Peak Avg	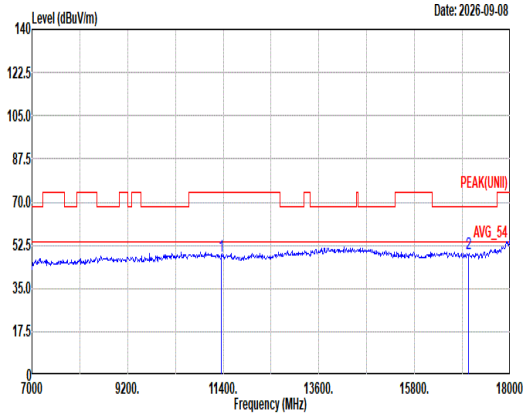 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11356.00 47.88 74.00 -26.12 57.15 39.10 16.81 65.98 0.80 400 313 Peak 2 17040.00 49.00 68.20 -19.20 55.71 38.16 20.67 66.32 0.78 -- -- Peak	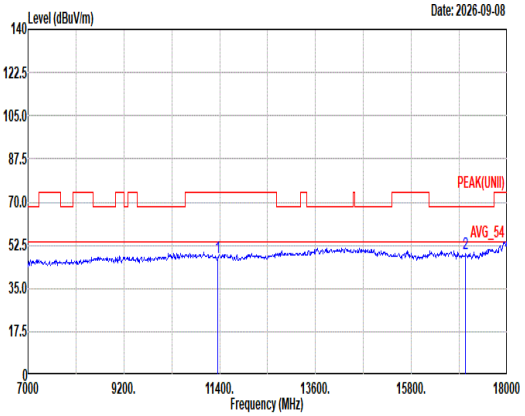 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11360.00 47.77 74.00 -26.23 57.05 39.10 16.81 65.99 0.80 -- -- Peak 2 17040.00 48.91 68.20 -19.29 55.62 38.16 20.67 66.32 0.78 -- -- Peak

Mode	72	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT20_CH136_Full RU_5680MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	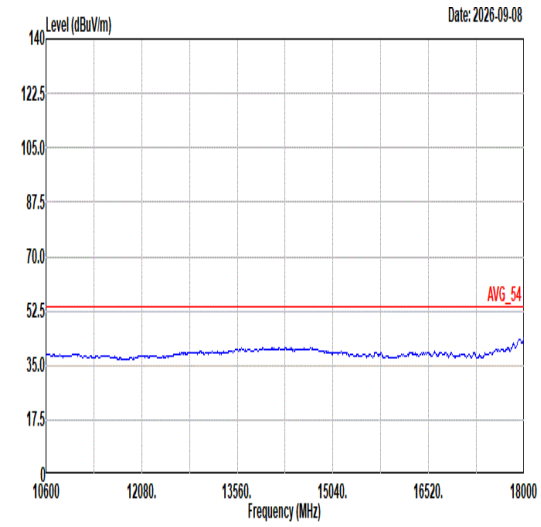 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL	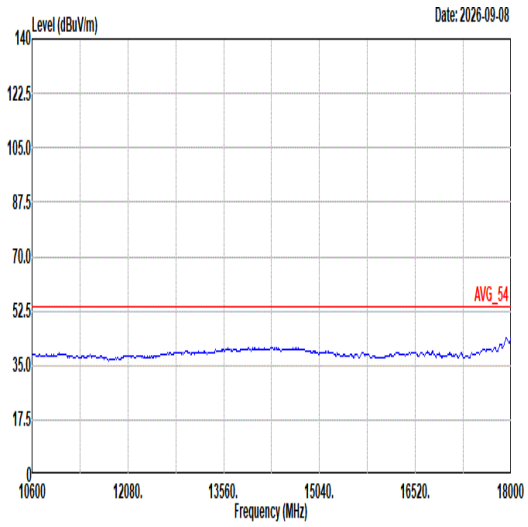 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL

Appendix D. Duty Cycle Plot

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
5+4	802.11a	99.24	-	-	10Hz
5+4	5GHz 802.11be EHT20 Full RU	99.73	-	-	10Hz
5+4	5GHz 802.11be EHT20 26 RU	99.55	-	-	10Hz
5+4	5GHz 802.11be EHT20 52 RU	99.55	-	-	10Hz
5+4	5GHz 802.11be EHT20 106 RU	99.35	-	-	10Hz
5+4	5GHz 802.11be EHT40 Full RU	99.60	-	-	10Hz
5+4	5GHz 802.11be EHT80 Full RU	99.63	-	-	10Hz
5+4	5GHz 802.11be EHT160 Full RU	99.60	-	-	10Hz

<Ant. 5+4>

802.11a

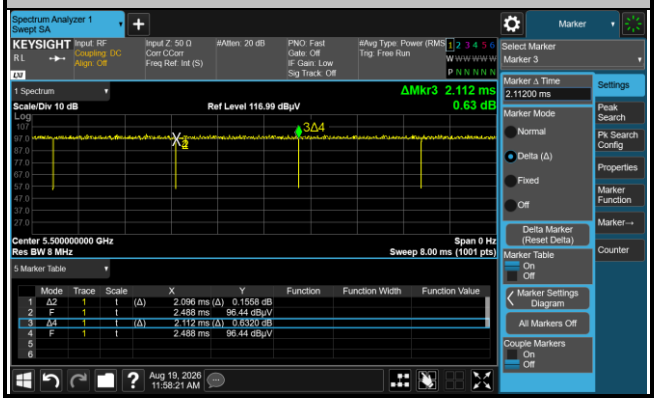

5GHz 802.11be EHT20 Full RU

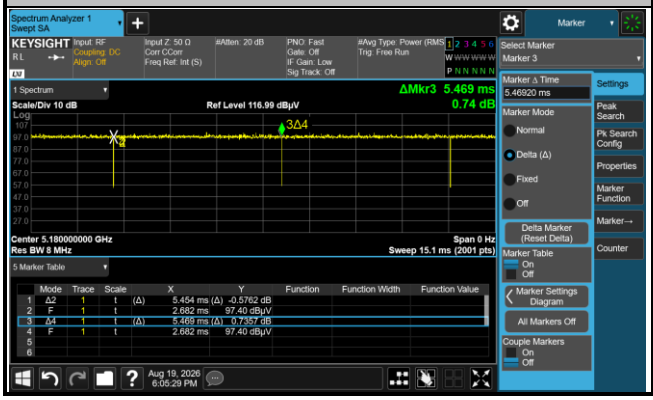

5GHz 802.11be EHT20 26 RU

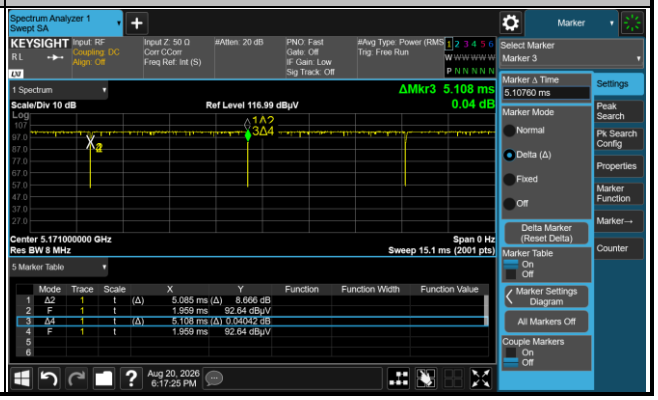

5GHz 802.11be EHT20 52 RU

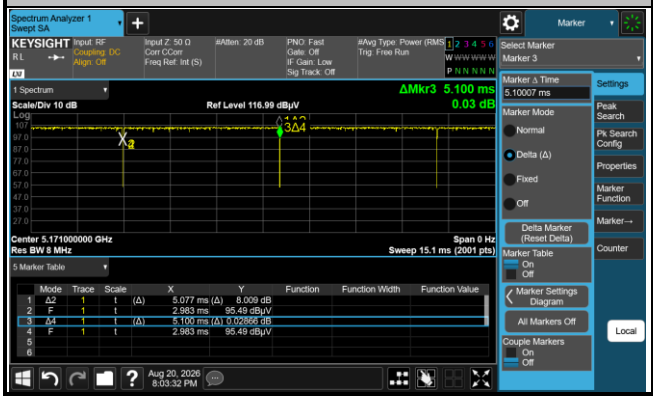

5GHz 802.11be EHT20 106 RU

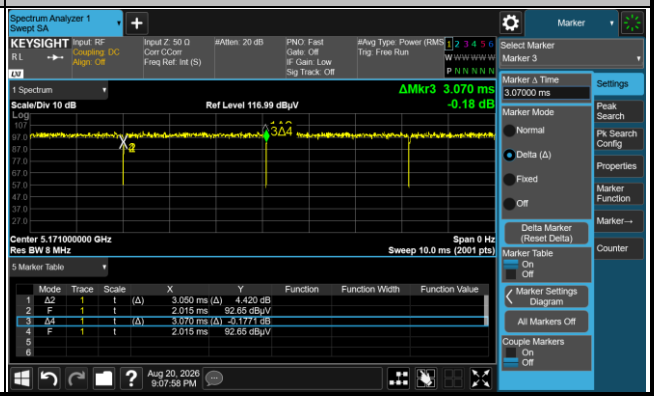

5GHz 802.11be EHT40 Full RU	5GHz 802.11be EHT80 Full RU
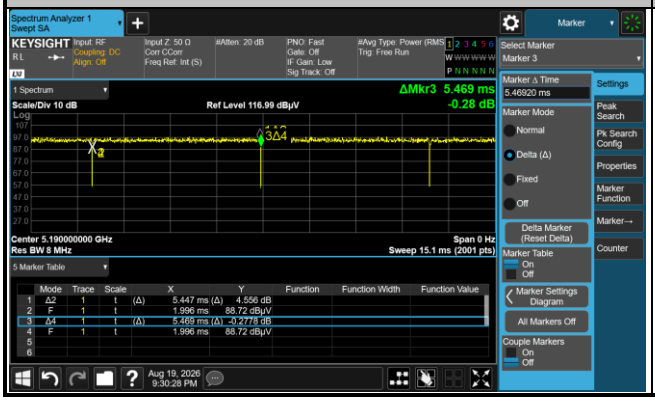	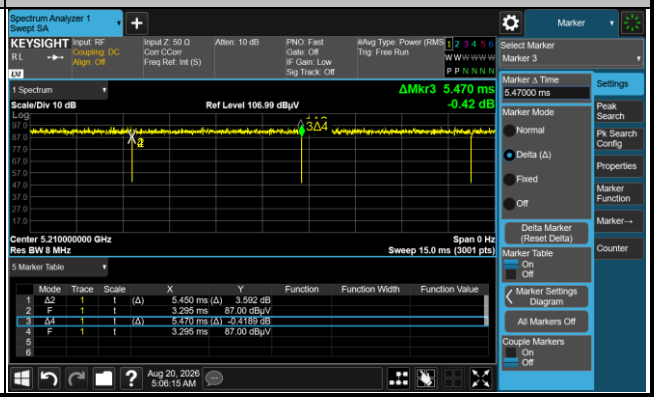
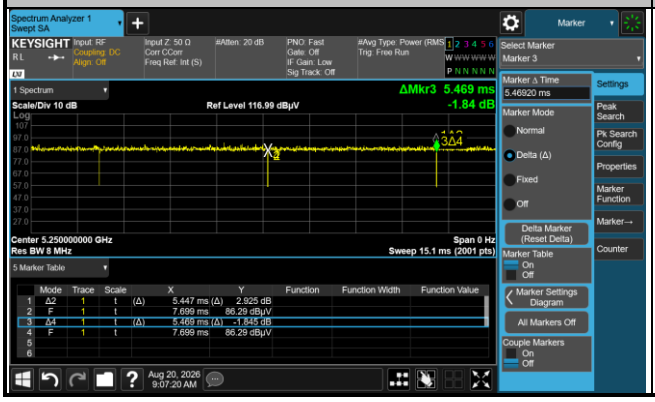
5GHz 802.11be EHT160 Full RU