



rīno 530

2-way radio & personal navigator[®]

owner's manual

PRELIMINARY



© Copyright 2005 Garmin Ltd. or its subsidiaries

Garmin International, Inc.
1200 East 151st Street
Olathe, Kansas 66062, U.S.A.
Tel. 913/397.8200 or 800/800.1020
Fax 913/397.8282

Garmin (Europe) Ltd.
Unit 5, The Quadrangle
Abbey Park Industrial Estate
Romsey, SO51 9DL, U.K.
Tel. 44/0870.8501241
Fax 44/0870.8501251

Garmin Corporation
No. 68, Jangshu 2nd Road
Shijr, Taipei County, Taiwan
Tel. 886/2.2642.9199
Fax 886/2.2642.9099

All rights reserved. Except as expressly provided herein, no part of this manual may be reproduced, copied, transmitted, disseminated, downloaded or stored in any storage medium, for any purpose without the express prior written consent of Garmin. Garmin hereby grants permission to download a single copy of this manual onto a hard drive or other electronic storage medium to be viewed and to print one copy of this manual or of any revision hereto, provided that such electronic or printed copy of this manual must contain the complete text of this copyright notice and provided further that any unauthorized commercial distribution of this manual or any revision hereto is strictly prohibited.

Information in this document is subject to change without notice. Garmin reserves the right to change or improve its products and to make changes in the content without obligation to notify any person or organization of such changes or improvements. Visit the Garmin Web site (www.garmin.com) for current updates and supplemental information concerning the use and operation of this and other Garmin products.

Garmin®, AutoLocate®, Personal Navigator®, MapSource®, TracBack®, BlueChart®, and Rino® are registered trademarks of Garmin Ltd. or its subsidiaries and may not be used without the express permission of Garmin.

June 2005

Part Number 190-00NNN-00 Rev. A

Printed in Taiwan





P R E L I M I N A R Y

INTRODUCTION

INTRODUCTION

Thank you for choosing the Garmin® Rino® 530 (Radio Integrated with Navigation for the Outdoors). To get the most from your new Rino 530, read through the *Quick Start Guide* first, then this *Owner's Manual* to understand all of the operating features.

The *Quick Start Guide* describes the process of navigating the Main Pages and the Option Menus, along with some basic unit operations to familiarize you with your new Rino 530 right out of the box. Read the *Quick Start Guide* first.

This manual is organized into the following sections:

The **Introduction** section provides FCC, safety, warranty, and product registration information, as well as the Table of Contents.

The **Getting Started** section provides basic information about the Rino 530.

The **Unit Operation** section provides information on each of the six Main Pages, listed in the same order as viewed on the unit. The section for each Page provides an overview that discusses the page, how it functions, and step-by-step instructions for using the page and its features. It also includes an overview of some additional features and step-by-step instructions for using the features.

The **Appendix** includes additional information about the Rino 530

The **Index** provides keywords and the pages on which they appear.



P R E L I M I N A R Y

INTRODUCTION > TABLE OF CONTENTS

Introduction.....	i	Mark Waypoint's Indicators	19
Getting to Know Your Rino 530	1	Using the Rino 530 Radio Features	20
Front of the Rino 530	2	Peer-to-Peer Positioning	20
Back of the Rino 530	3	New Contact Page Overview	20
Main Display Pages	4	Sending a Location	23
Operating the Rino 530	5	Map Page.....	24
Status Bar Overview	6	Map Page Options	26
Unit Operation.....	7	Using the Pan Map Option	27
Radio Page.....	7	Programming the Data Fields	28
Initializing the Rino 530	7	Setting up the Map.....	29
Using My ID and Symbol Fields.....	8	Measuring Distance	31
Setting the Channel and Squelch Code.....	10	Navigation Page	32
Scanning and Monitoring	12	Using the Navigation Page	32
Radio Page Option Menu	14	Navigation Page Options	34
Setup Radio	14	Using Sight 'N Go	35
Setup Tones	16	Calibrating the Compass.....	35
Setup Scanlist.....	16	Altimeter Page	37
Use Weather Radio.....	17	Altimeter Page Options	38
Turn Radio/GPS On/Off	18	Viewing Pressure/Elevation Plots.....	39
Informational Picture	18	Adjusting the Zoom Ranges	39
GPS Status	18	Viewing Points.....	40
Radio Transmission Status	18	Resetting Data.....	40
		Calibrating the Altimeter	41



P R E L I M I N A R Y

INTRODUCTION > TABLE OF CONTENTS

Programming Data Fields	41
Trip Computer Page	42
Trip Computer Page Options	42
Main Menu Page	43
Using the Main Menu	43
Main Menu Options	45
Shortcuts Menu	46
Waypoints	47
Mark Waypoint Page	47
Creating Waypoints	48
Projecting a Waypoint	49
Editing a Waypoint	49
Find 'N Go	51
Finding a Waypoint	52
Finding a Contact	54
Finding a City	55
Finding an Exit	56
Finding a Point of Interest	57
Finding an Address or Intersection	59
Finding a Last Found Place	61
Weather Radio	62
Sending a Note	63
Using a Goto	64

Routes Page	65
Creating and Using a Route	65
Editing a Route	66
Adding or Editing from the Route Map Page	69
Navigating a Route	70
Stopping Navigation	71
Data Fields for the Route Page	71
Tracks Page	72
Using the TracBack Feature	73
Setting up the Track Log	74
Proximity Page	75
Satellite Page	76
Sky View Graphic	76
WAAS	77
Satellite Strength	77
Satellite Page Options	78
Setup Pages	80
Time Setup Page	80
Units Setup Page	81
LORAN TD Format	82
Display Setup Page	83
Heading Setup Page	84
Interface Setup Page	85



P R E L I M I N A R Y

INTRODUCTION > TABLE OF CONTENTS

System Setup Page.....	87	Radio.....	102
Calendar	88	Power.....	102
Alarm Clock	90	Accessories	103
Calculator.....	91	Transferring MapSource Data	104
Stopwatch	92	GPS Troubleshooting Guide	106
Stopwatch Lap Options	92	Radio Troubleshooting Guide	107
Sun & Moon	93	FRS Frequency Chart	108
Hunt & Fish	94	Weather Radio Frequency Chart.....	108
Area Calculator.....	95	GMRS Frequency Chart	109
Games	96	Data Field Definitions.....	110
Memory Race	96	Interface Information.....	112
Waypoint Bomber.....	97	FCC Compliance Information.....	113
Clothesline	98	FCC Licensing Information	114
Assimilation.....	98	Limited Warranty	115
Beast Hunt	98	Software License Agreement	117
Appendix	99	Product Registration	117
What is FRS?	99	Contact Garmin.....	117
FRS Features.....	99	Warnings and Cautions	118
FRS Limitations.....	100	Index	121
GMRS	100		
Specifications	101		
Physical.....	101		
Performance.....	101		



P R E L I M I N A R Y

GETTING STARTED > GETTING TO KNOW YOUR RINO 530

GETTING TO KNOW YOUR RINO 530

The Rino 530 (Radio Integrated with Navigation for the Outdoors) is a 7.6 ounce, 12 channel GPS-enabled handheld device. It has integrated radio functionality to provide two-way communications for up to two miles using 14 FRS (Family Radio Service) channels. The Rino 530 also provides 8 high-performance GMRS (General Mobile Radio Service) channels and 8 GMRS repeater channels (U.S. versions only) for up to five miles. GMRS repeater channels are not approved for use by the Canadian government, so they are disabled on Rino 530 units sold in Canada.

The Rino 530 has three user-selectable power levels: 0.5 W, 2.0 W, and 5.0 W. Keep in mind that FRS channels only transmit at 0.5 W, even if you select a higher power level. The Rino 530 also has a rechargeable lithium-ion battery pack with charger. If you wish, you can purchase an optional alkaline battery pack (however, transmit power is limited to 2.0 W when using this pack).

The unit contains built-in cartography of a North American basemap that includes Interstate and State Highways and Exit Information. Using MapSource®, Garmin's map data software (not included), the Rino 530 can display up to 24 MB of a variety of different map information. We currently offer several mapping options that are compatible with the Rino 530 including our MetroGuide, Topo, Fishing Hot Spots, and BlueChart® data. Check your local dealer or the Garmin Web site (www.garmin.com) for a complete listing of MapSource products.

Garmin designed your Rino 530 with you, the user, in mind. The Rino 530 is waterproof to IPX7 standards and is rugged enough to endure the most trying use. Garmin's friendly user interface allows you to start navigating with your new GPS in no time. Your Rino 530 can provide one more critical benefit: peace of mind. With your Rino 530 you know where you are, where you've been, and where you're going. And since you'll always know the way back home, you can concentrate on what you set out to do; explore the great outdoors.

Rino® 530 Owner's Manual

1



Front of the Rino 530

Power button:

- Press and hold to turn the unit On/Off
- Press to adjust contrast and backlighting

Call button:

- Press to send out Call Tone
- Sends position when released (if enabled)

Talk button:

- Press and hold to talk
- Sends position when released (if enabled)

Page/Quit button:

- Press to cycle through main pages
- Used to quit or escape menu items

Volume (V) button:

- Press to open volume control window

Speaker

LCD Display

Thumb Stick

- Press In to enter highlighted options and to confirm messages
- Move Up, Down, Right or Left to move through lists, highlight fields, on-screen buttons, icons, enter data, or move the map panning arrow
- Press In and hold to display Shortcuts Menu.



Zoom/Map (Z) button:

- From the Map Page, press to open Zoom control window
- From any other page, press to display Map Page and press again to open Zoom control

Microphone:

- Hold unit 3-4 inches away when talking

Rino® 530 Owner's Manual



P R E L I M I N A R Y

GETTING STARTED > BACK OF THE RINO 530

Back of the Rino 530




Rino® 530 Owner's Manual





Main Display Pages

All of the information you need to operate the Rino 530 can be found on six default main pages (or display screens). Simply press and release the **Page** button to cycle through the Radio Page, Map Page, Navigation Page, Altimeter Page, Trip Computer, and Main Menu Page. You can also access the Main Pages by pressing the on-screen Main Page button . Customize the Main Page sequence through the Main Menu (see page 45).

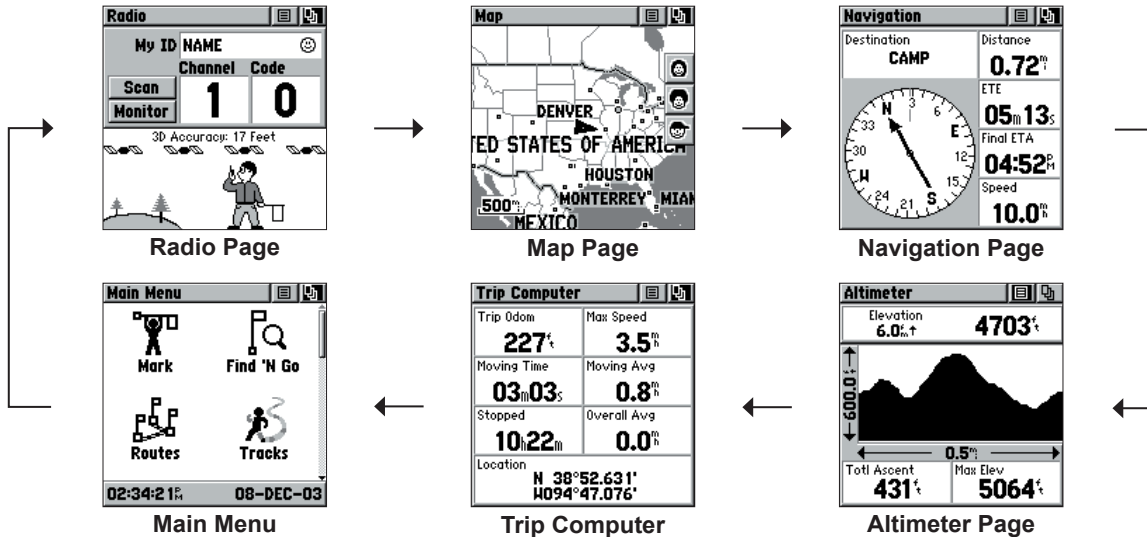



P R E L I M I N A R Y

GETTING STARTED > OPERATING THE RINO 530

Operating the Rino 530

For best results, you should initialize the GPS receiver in your Rino 530 unit before you use it the first time. See page 7 for instructions on initializing the unit. For most accurate results, the compass and altimeter should also be calibrated. Refer to the “Calibrating the Compass” and “Calibrating the Altimeter” sections for complete information.

The Rino 530 is programmed to provide “pop-up” messages concerning operational characteristics and conditions. Press the **Thumb Stick** In to acknowledge a message and return to the current feature.

To use the Thumb Stick:

- Press In to enter highlighted options and to confirm messages
- Move Up, Down, Right or Left to move through lists, highlight fields, on-screen buttons, icons, enter data, or move the map panning arrow
- Press In and hold to display Shortcuts Menu.

To use the page Option Menu:

1. Highlight the **Option Menu** on-screen button  at the top of the display screen and then press the **Thumb Stick** In to open the menu.
2. Highlight the desired menu option and press the **Thumb Stick** In to activate the option.
3. To close without making a selection, move the **Thumb Stick** to the Right.

To lock/unlock the buttons:

1. Press and hold the **Thumb Stick** In to access the Shortcuts Menu. Highlight **Enable Keylock** and press the **Thumb Stick** In. The **Talk** button is now locked.
2. To unlock, press and hold the **Page** button until “Keylock Disabled” is displayed (about 5 seconds).



Status Bar Overview

The Status Bar at the top of the screen displays on all the available Main Pages. As you move around any of the Main Pages, the current page's title briefly displays (3 seconds) and then is replaced by the Status Bar. The current settings and operational icons on the Status Bar are displayed as you operate the unit.

The available icons are:

-  Battery Full (Each bar represents 1/4 charge)
-  Battery 1/2 charge
-  Battery Empty
-  Using External Power
-  Receiving Radio signal
-  Transmitting Radio signal
-  Backlight On
-  Radio On



Peer-To-Peer On/Location Ready to Send



Keylock On



Alarm Clock On



GPS On, Position Ready



GPS On, Position Not Ready



Compass On (Press and hold the Zoom key to turn the compass on/off)



Weather Alert On



P R E L I M I N A R Y

UNIT OPERATION > RADIO PAGE


UNIT OPERATION

Radio Page

The Radio Page is the first of the default Main Pages. This page provides the user interface for FRS (Family Radio Service) and GMRS (General Mobile Radio Service) radio operations. Garmin Rino units work with 3rd party FRS/GMRS radios, provided the other radios use standard FRS/GMRS frequencies. To take full advantage of the Rino features, communicate with other Rino users.

The Radio Page also provides access to the Weather Radio, which provides a constant update of current weather conditions. The Weather Alert feature further enhances the Weather Radio by automatically notifying you of any weather alerts, even when the Weather Radio is not in use and the FRS/GMRS radio is in use! These features are helpful while outdoors or planning a road trip.

Also use this page to control and setup the radio, view current settings and see informational graphics of the unit's operation.



Radio Page

Initializing the Rino 530


To take full advantage of all of the Rino 530 features, the GPS receiver must be initialized. The initialization process allows the Rino 530 to receive and store satellite information and begin using the satellites for navigation. Initialization is automatic, should only take a few minutes, and only needs to be done the first time the unit is used.

**To initialize the unit:**

1. Take the Rino 530 outside where it has an unobstructed view of the sky and turn it on.
2. The unit begins to search for satellite signals. "Tracking Satellites" is displayed while the unit is initializing.
3. Initialization should take no more than five minutes. When the GPS is initialized and ready for navigation, the message "3D Accuracy" is displayed on the Radio Page.

Using My ID and Symbol Fields

The **My ID** field allows you to enter a name and symbol that appears on other Rino units as you communicate with them. You may enter a name using a combination of up to 10 letters, numbers, or spaces. The **Symbol** field allows you to choose a face icon from a list to further personalize your ID.

**To enter a name:**


1. Using the Thumb Stick, highlight the **My ID** field. Press the **Thumb Stick In** to activate the field and display the keyboard.
2. Move the **Thumb Stick Up, Down, Left, or Right** to highlight the **Clear** field, then press the **Thumb Stick In** to clear the default **Name ID**.
3. To enter a new ID, use the **Thumb Stick** to move the cursor to the desired character (letter, number, or a space). Press the **Thumb Stick In** to select that highlighted character. Choose **Back** to delete the character to the left of the cursor. You may enter up to 10 characters for your ID.




P R E L I M I N A R Y

UNIT OPERATION > RADIO PAGE

*Entering a name
with the on-screen
keyboard*



*Changing the
user symbol*



4. When you have entered your new ID, use the Thumb Stick to highlight **OK** and then press the **Thumb Stick In**.

To change the user symbol:

1. Using the Thumb Stick, highlight the face symbol to the right of the My ID field. Press the **Thumb Stick In** to show a list of available face icons.
2. Move the **Thumb Stick Up** or **Down** to scroll through the selections. Because not all the selections can fit in the window, a slider bar on the right side indicates your current position in the list.



TIP: Hold the Thumb Stick Up or Down to scroll through the list more quickly. Once you reach the end of the list, you can wrap back to the top or bottom by releasing the Thumb Stick then pressing in the same direction again. This same method may also be used on other selection windows.


3. Once you have highlighted the desired icon, press the **Thumb Stick In**.



Setting the Channel and Squelch Code

The Rino 530 has a total of 22 channels (not including GMRS repeater channels) and 38 squelch codes to select from using the Channel and Code fields. Channels 1–7 and 15–22 GMRS channels, 8–14 are FRS channels, and 15R–22R are for GMRS repeater channels (repeater channels are available U.S. units only and are disabled by default). To communicate with other Rino and FRS/GMRS users, you must be on the same channel and squelch code. Garmin Rino units work with 3rd party FRS/GMRS radios, provided the other radios use standard FRS/GMRS frequencies. A chart of Rino frequencies may be found in the “Appendix.”

Squelch codes allow you to hear calls from only specific persons. Thirty-eight (38) Squelch Codes (called Continuous Tone Coded Squelch System or CTCSS) allow your Rino 530 to ignore unwanted calls from other persons using the same channel. Simply select the same squelch code (number) as selected by the other person(s) with which you will communicate.



Select from FRS 1–14, GMRS 15–22 (with GMRS enabled), and 15R–22R GMRS repeater channels (with GMRS and Repeater Channels enabled).



NOTE: Squelch codes do not cause your conversation to be private. They only allow you to filter out other users on the same channel, so you only hear the radios you want to hear. Squelch Codes are not a scrambling system!




P R E L I M I N A R Y

UNIT OPERATION > RADIO PAGE

Setting the squelch code to 0 (squelch code off) allows you to hear all activity on the selected channel, but you must be set to the same squelch code as the other person(s) to transmit back. See the “Appendix” for a table listing all of the 38 Squelch Codes and their frequencies.

As you change the main channels, the Rino 530 remembers the last channel/squelch code combination that you were using. For example, you may set the unit channel to 5 and squelch code to 21, then change the main channel to 8 and squelch code to 2. If you change the channel back to 5, the squelch code changes back to its previous setting of 21. See the “Appendix” for more information on FRS/GMRS and its operational aspects.



Choose from 38 squelch codes. Setting the unit to zero will allow you to hear all transmissions on that channel, but you must be on the same squelch code to radio back.

To change the Channel and/or Squelch Code:

1. Using the Thumb Stick, highlight the **Channel** or **Code** field and then press the **Thumb Stick In** to show a list of available channels/squelch codes.
2. Move the **Thumb Stick** Up or Down to scroll through the selections. Because not all the items fit in the window, a slider bar on the right side indicates your current position in the list.
3. Once you have highlighted the desired selection, press the **Thumb Stick In**.



Scanning and Monitoring

The Scan option allows you to scan through the available channels for voice activity. As the unit scans and receives a signal (or if you transmit), it stops on that channel/squelch code for a few seconds, then continues scanning. When the Rino 530 is scanning and it receives an incoming signal, the Rino 530 automatically decodes the Squelch Code used by the incoming signal. The Rino 530 then uses that Squelch Code when it transmits back to that unit.

You may use the Set Scanlist option to pick which channels/squelch codes to scan. Scanning through the all the channels can take time: Selecting only specific channels/squelch codes decreases the scan time and helps prevent the chances of missing a transmission. The Scanlist also has Option Menu  choices to Scan Current Codes or Scan All Codes. Choosing Scan Current Codes scans only the Channel and Squelch Code combination in memory.

The Monitor option lets you listen to a single channel for any activity, including static and weak voice signals. The Rino series automatically squelches a frequency to filter out unwanted noise. Using the Monitor option temporarily turns off the automatic squelch, allowing you to hear the open channel. If you see a broken transmission symbol (see page 18), there is activity on your selected channel, but the incoming signal does not match the Squelch Code your unit is using. You may choose to monitor a channel if you wish to hear all the activity on a channel.


To scan or monitor a channel(s):

1. Using the Thumb Stick, highlight the **Scan** or **Monitor** button and then press the **Thumb Stick** In. **Scan** starts searching through the available channels. **Monitor** opens the channel to listen to any radio transmissions on that channel.
2. To stop using either option, highlight the button with the **Thumb Stick** and press In.



PRELIMINARY

UNIT OPERATION > RADIO PAGE




*The Code field is blank
when the unit is scanning or
monitoring channels.*

To setup a Scanlist:

1. Using the Thumb Stick, highlight the **Option Menu** on-screen button  and press In. Highlight **Setup Scanlist** and press the **Thumb Stick In**.
2. To add/remove a channel from the list, highlight the channel and press the **Thumb Stick In** to add/remove the check mark in front of the name. Only channels that are checked will be scanned.
3. To select all channels or clear all channels, highlight either the **Select All** or **Clear All** buttons and press the **Thumb Stick In**.

4. To Scan Current Codes, highlight the **Option Menu**  and press the **Thumb Stick In**. Choose the desired setting and press the **Thumb Stick In**.



Scanlist Page

The Radio Page Option Menu provides the following: Setup Radio, Setup Tones, Setup Scanlist, Use Weather Radio/Use FRS/GMRS Radio, Turn Radio Off/On, Turn GPS Off/On, and Enable Weather Alert. Refer to the following pages for explanations of each item in the Radio Page Option Menu.



Radio Page Option Menu


The Radio Page Option Menu  allows you to customize aspects of your Rino 530, such as setting up the radio, programming call and ring tones, and setting up a scanlist.

Setup Radio

The Setup Radio option displays the Radio Setup Page. This page determines how the radio functions and enables you to adjust the radio operation to your needs. The following options are available:



*Radio Page
Option Menu*



Setup Radio Page

Send Location—Enables/disables the peer-to-peer positioning feature. See the “Peer-to-Peer” section for more on this feature.

Allow Polling—Enables/disables your Rino 530’s ability to respond to a poll from another Rino.

VOX Level—Controls the sensitivity level of any Voice Operated Transmission (VOX) accessory. VOX accessories allow you to use the unit hands-free. A lower VOX setting is recommended for quiet environments while a higher VOX setting should be used in noisy environments. Setting the VOX level to 5 is recommended for most environments, but it may be necessary to adjust the level to achieve the desired voice trigger level. You will hear yourself talking in the headset when transmitting successfully using VOX.

Scramble—Adds a level of security to your conversations. When On, the voice transmission sounds garbled to other non-scrambled Rino units, as well as other 3rd party radios.



P R E L I M I N A R Y

UNIT OPERATION > RADIO PAGE



NOTE: When Scramble is set to **On**, in order for peer-to-peer and Send Location features to work, the receiving radio must have Scramble enabled also.

GMRS Radio—Use this option to turn On/Off GMRS channels 15–22. When you turn GMRS channels off, channels 15–22 will be disabled and channels 1–7 will become FRS channels (GMRS interstitial). Remember, you must obtain a license to operate GMRS channels in the U.S. See the “FCC Licensing Information” section and the “Appendix” for more information on using GMRS channels.

Repeater Channel—Use this option to turn On/Off GMRS repeater channels 15R–22R. This option is only available when GMRS is enabled. GMRS repeater channels are not available in Rino units sold in Canada.

Headset Type—Allows you to choose which accessory headset or microphone you are using with the unit, or have the unit automatically detect the type. If you use more than one type of headset or microphone, you need

Rino® 530 Owner's Manual

to set the unit to **Ask When Detected** before changing accessories.



NOTE: If the headset has a PTT (Push to Talk) button, it must be pressed for the unit to detect the headset.

Microphone Sensitivity—Allows you to set the sensitivity of the internal microphone and the sensitivity of a headset microphone.



Setup Tones

Call Tone—When the **Call** button is pressed, an attention tone is transmitted. This option allows you to choose one of ten tones.


Roger Tone—When the **Talk** button is released, a tone is sent to signify the end of the transmission. This option allows you to choose one of four tones, or set the tone to Off.

Ring Tone—When an incoming transmission is received, an attention tone will sound. This option allows you to choose one of ten tones or set the tone to Off. The Ring tone will not sound again until there has been 45 seconds of radio inactivity.

Vibrate—Choose from On or Off to have the unit vibrate when an incoming transmission is received. Once received, the unit will not vibrate again until there has been 45 seconds of radio inactivity.

On/Off Tone—Enable or disable the tone the unit makes when it is turned on and off.


Message Tone—Choose from On or Off to have the unit emit a tone when a message or note is received.



Setup Tones Page

Setup Scanlist

Refer to “Scanning and Monitoring” for complete information about this feature and the options in this page.



Setup Scanlist Page



P R E L I M I N A R Y

UNIT OPERATION > RADIO PAGE


Use Weather Radio

The Weather Radio provides a constant update of the weather conditions, which is helpful while outdoors or planning a road trip. The Weather Alert further enhances the Weather Radio by automatically broadcasting any weather alerts if you are not actively transmitting or receiving on the radio.


Select the Radio Page **Option Menu** button . Press the **Thumb Stick In** when **Use Weather Radio** is highlighted to turn on the weather radio. You can also access the Weather Radio through the Shortcuts Menu.

When the Weather Radio is on, a tower emitting signals is shown in the informational picture on the Radio Page, as shown to the right. The FRS/GMRS radio cannot be used when the Weather Radio is on. Also, you cannot scan or monitor FRS/GMRS channels when the Weather Radio is in use. The audio is unmuted when the Weather Radio is on so that you can listen to weather broadcasts.

Change the Weather Radio channel in the same manner as changing the FRS/GMRS radio channel. There are seven Weather Radio channels (1 through 7) available.



*Radio Page with
Weather Radio On*



*Changing the Weather
Radio Channel*

When the Weather Radio is on, **Enable Weather Alert** is added at the bottom of the Option Menu. Press the **Thumb Stick In** when **Enable Weather Alert** is highlighted to turn the feature on. You can then turn the Weather Radio off and continue normal FRS/GMRS radio operations.



When a Weather Alert tone is detected, the Rino 530 automatically turns on the Weather Radio and broadcasts the Weather Alert if you are not actively transmitting or receiving on the radio. The volume changes to 3/4 the maximum when a Weather Alert is broadcast. Select **Disable Weather Alert** to turn off this feature.

To turn the weather radio off, press the **Thumb Stick In** when **Use FRS/GMRS Radio** is highlighted. This switches the Rino 530 back over to the FRS/GMRS radio operation.

Turn Radio/GPS On/Off

Press the **Thumb Stick In** on either of these two options to toggle them from on to off. For example, to turn GPS Off, press the **Thumb Stick In** when **Turn GPS Off** is highlighted.

Informational Picture

The Informational Picture on the bottom half of the Radio Page features Garmin's Mr. Mark Waypoint showing current GPS and radio status, and radio actions. As you operate the unit, the graphics change depending on what actions you are taking and the unit settings.

GPS Status

Four satellites are shown on at the top of the picture along with descriptive text to indicate GPS reception status. As the unit collects satellite information, the satellite symbols flash alternately until all four are steady to indicate a 3D position fix. The more satellites that are steady, the better your position fix.

Radio Transmission Status

As radio signals come in, signal wave symbols display to the left of Mark Waypoint. Fragmented (or broken) signal symbols are shown to indicate activity on that channel. Audio remains muted because the incoming signal does not match the squelch code your unit is set to.



PRELIMINARY

UNIT OPERATION > RADIO PAGE

Mark Waypoint's Indicators

The Mark Waypoint figure displays several different icons, depending on what you are doing. See the following illustrations for more information.

GPS and FRS/GMRS Radio On;
Ready to transmit Position



GPS and FRS/GMRS Radio On;
Ready to transmit Position;
Receiving transmission



GPS and Weather Radio On
(FRS/GMRS Radio Off)



GPS and FRS/GMRS Radio On;
Ready to transmit Position;
Activity on channel.



GPS and FRS/GMRS Radio On;
Ready to transmit Position;
Transmitting on FRS



GPS and FRS/GMRS Radio On;
Ready to transmit Position;
Position received from other
Rino user



GPS and FRS/GMRS Radio On;
Position not ready;
Transmitting on GMRS



GPS Off; FRS/GMRS Radio On;
Position sending not available



GPS and FRS/GMRS Radio On;
Position transmitted



GPS On; FRS/GMRS Radio Off;
GPS operation only





Using the Rino 530 Radio Features

Your Rino 530 unit provides many features to enhance your radio experience, such as transmitting your location or any location and receiving contact information. This section reviews some of the advanced radio features. Refer to the “Features” section for information on all of the features of the Rino 530.

Peer-to-Peer Positioning

The Rino 530’s most unique feature is being able to send its location to another Rino, which is called Peer-to-Peer positioning. With peer-to-peer positioning enabled (see the “Setup Radio” section) and a GPS position, whenever you press and release either the **Call** button or the **Talk** button, the Rino 530 automatically sends out its location. This information is available to all other Rino users that are monitoring the same channel and squelch code. This feature allows you to track the movement of other Rino users and even navigate to their location. Locations may only be sent once every 30 seconds due to FCC restrictions. Your Rino 530 can respond to polling


requests from other units more frequently.

To transmit your location to other Rino users:

1. Enable **Send Location** (see the “Setup Radio” section).
2. Press and release either the **Talk** or **Call** button. A flag on the top Status Bar or in Mark’s hand indicates the unit is ready to transmit its position.

New Contact Page Overview

The first time that a signal is received from another Rino user, a New Contact page is displayed. From the New Contact page you can show their location on your Map, Goto their location, or add them to your contact list (select **OK**). Press **Page** to ignore this contact.



New Contact Page




P R E L I M I N A R Y

UNIT OPERATION USING THE RINO 530 RADIO FEATURES

The Rino 530 can manage up to 50 contacts at any time. Each time you receive a signal from a contact, your map is updated showing their new position. A Track Log of their movement is created and shown on your map (see the “Track Logs” section). After a contact has been established, a “<contact name> Updated” message briefly appears at the bottom of your display each time the contact updates.

All contacts are listed on a Contact List Page and also displayed in the Contact Bar on the Map Page (see the “Map Page” section). Contacts behave like waypoints and count towards the 500 maximum waypoint total. If the contact did not have a GPS location on the last transmission, a ? mark appears below the flag. To view the contact details (such as Direction, Elevation, Timestamp, Location, and Notes that have up to 30 characters), highlight the details field and press Left or Right on the **Thumb Stick** to change to the next data field.



Press Left or Right on the **Thumb Stick** to view different contact data.

To accept a new contact:

1. When a new contact is received, the New Contact page automatically appears.
2. Highlight **OK** and press the **Thumb Stick** In. If you do not select **OK**, the contact is not saved.



UNIT OPERATION > USING THE RINO 530 RADIO FEATURES

P R E L I M I N A R Y

To review a contact and contact details:

1. From the Map Page, highlight the desired contact on the Contact Bar and press the **Thumb Stick** In. As you highlight the contacts on the Contact Bar, the Map page centers the map on that contact and display its name, direction and distance near the top of the screen.

Or

1. Press the **Thumb Stick** In and hold it until the Shortcuts Menu is displayed. Highlight **Find 'N Go** and press the **Thumb Stick** In.
2. Highlight **Contacts** and press the **Thumb Stick** In.
3. From the Contacts List, select the desired contact and press the **Thumb Stick** In.

To change contact details:

1. The Elevation, Position and Note fields may be manually edited. Select the desired field and press the **Thumb Stick** In.

2. For Notes, highlight **Edit** and press In to start entering data, up to 30 characters. For other fields, highlight the field and press the **Thumb Stick** In to start changing the data.
3. Highlight **OK** and press In when done.

To view a contact on the Map Page:

1. From the Contact Review Page, highlight **Map** and press the **Thumb Stick** In.
2. Press the **Page** button when done to return to the Contact Review Page.




P R E L I M I N A R Y

UNIT OPERATION USING THE RINO 530 RADIO FEATURES

Sending a Location

Another feature is the ability to send a specific location to other Rino users. This comes in handy when you are trying to round-up the group or you just want to meet at a specific location. You may send any point found from the Find 'N Go menu. If the unit needs to wait until 30 seconds have elapsed since the last position transmission, a "Waiting to send location..." message appears until the unit is able to transmit. If a location is sent more than once, a number is automatically added to the end of the name (for example: CAMP, CAMP 1, CAMP 2, etc.).



To send a location, highlight the Option Menu from the Waypoint Review Page and press In.

To send a location:

1. Press the **Thumb Stick In** and hold it until the Shortcuts Menu is displayed.
2. Highlight **Find 'N' Go** and press the **Thumb Stick In**.
3. Highlight the desired category and press the **Thumb Stick In**. (For the Contacts List, select the desired contact and press the **Thumb Stick In**.)
4. Depending on which category you select, highlight the desired item and press the **Thumb Stick In** to display the Information page for that item.
5. From the Information Page, highlight the **Option Menu**  in the upper right and press the **Thumb Stick In**.
6. Highlight **Send Location** and press In again. The unit now sends the point to the other Rino users on your channel/squelch code. If using the Scramble feature, receiving radios must also have Scramble enabled.



Map Page

The Map Page displays your present position and direction of movement using a triangular Position Icon that is centered on the map. As you travel the map display leaves a “trail” (track log) of your movements.

The map displays geographic details such as rivers, lakes, highways, and towns. The map can display a higher level of detail than the basemap provided with the unit (i.e. residential streets, parks, etc.), if Garmin MapSource data has been downloaded to the unit using a CD-ROM mapping program. When using MapSource data, the word “mapsource” displays below the map scale whenever you zoom in to view map details.


On the right side of the Map Page, you can choose to show either the Contact Bar, Data Fields, or only the Map. As you highlight the contacts on the Contact Bar, the Map page centers the map on that contact and displays its name, direction, and distance.

In many instances the map displays an Accuracy Circle surrounding the Position Icon. The Rino 530 uses both

map resolution and GPS accuracy in defining your location to a point within the circle. The smaller the circle, the more accurate your location.

When using the Pan Map feature, a small outline arrow (Map Pointer)  can be moved about the page to highlight and identify map items or to scroll the map to view areas not shown on the display screen.

Four optional Data fields on the right side of the page can be programmed to provide a variety of travel and navigation information.

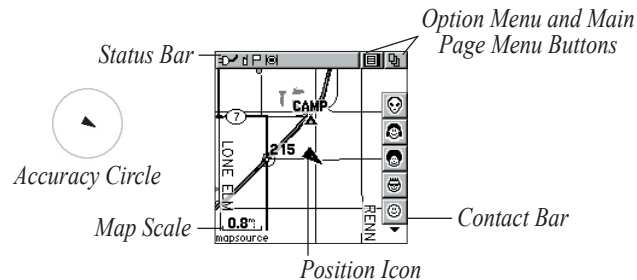




P R E L I M I N A R Y

UNIT OPERATION > MAP PAGE

To view a Contact from the Map Page:

1. Highlight the **Contact** icon using the **Thumb Stick**. As you highlight the contacts on the Contact Bar, the Map page centers the map on that contact and displays its name, direction, and distance near the top of the screen.
2. Press the **Thumb Stick In** to view the details of the Contact.
3. Press the **Thumb Stick** to the Left or Right to re-center the map on your current position.

The scale can be changed from 20 feet to 500 miles. A lower zoom scale displays less area but more map detail, while a higher zoom scale shows you a larger area with less map detail. The **Thumb Stick** and **Z** (Zoom) button on the front right of the unit allow you to zoom in and out on the map. Press the **Z** (Zoom) button from any page (other than the Map Page) to open the Map Page.



*Press Up to Zoom Out;
press Down to Zoom In*

To change scales on the Map Page:

1. Press the **Z** (Zoom) button to open the Zoom window.
2. Use the **Thumb Stick** and **Z** (Zoom) button to change the map scale in order to show more map area with less detail or less map area with more detail.


Press and hold Up or Down on the **Thumb Stick** to zoom the map scale rapidly. Press the **Thumb Stick In** or to any direction to close the Zoom window.

The map scale in the lower left hand side of the display is shown in units of measurement selected in the Units field of the Unit Setup Page (accessed through the Main Menu Setup Page). If you zoom in so far that the resolution of the map data is exceeded and the appearance of the map is no longer accurate, the word, “overzoom” displays just below the map scale.



Map Page Options

Map Page options allow a variety of operating and custom features for your Rino 530. The Map Page options are: Highlight an option then press the **Thumb Stick** In to select.



Map Page Option Menu

Pan Map—Allows you to move the Panning Arrow (Map Pointer) about on the map. Refer to the “Using the Pan Map Option” section for complete instructions.

Stop Navigation—Quits navigation of a Goto, Route or Track in progress. When you are not navigating to a destination, the Stop Navigation option is “grayed out” and is non-functional.

Show...—Allows you to choose to show either the Contact Bar, four programmable Data Fields or show the Map Only. Choosing either Contact Bar or Data Fields reduces the map area.



Setup Map—Displays the Setup Map Pages, which allow you to tailor the map to your requirements such as changing text size, map orientation, and map detail. Refer to the “Setting up the Map” section for complete instructions.

Measure Distance—Displays the distance from one point on the map to another.

Restore Defaults—Returns the Map Page to the original factory settings (defaults).



P R E L I M I N A R Y

UNIT OPERATION > MAP PAGE

Using the Pan Map Option

The Map Page pan function allows you to display an arrow used to point at and identify items on the map, and to move the map in order to view areas beyond the current viewing area on the display.

The map panning function is activated from the Option Menu  on the Map Page. Use the **Thumb Stick** to move the panning arrow (also referred to as the map pointer) in the desired direction. If the arrow moves to the edge of the map display, the map also moves to reveal more area and a busy hourglass appears by the cursor while the data is drawn on the screen.

Whenever you place the panning arrow on a map item, the name of that item is highlighted. This feature applies to waypoints, roads, lakes, rivers; nearly everything that is displayed.


Press the **Thumb Stick In** to mark the arrow location or display the map item information page. The Option Menu  allows you to: send the location of that item, project a waypoint from it, save it as a waypoint, set a proximity

Rino® 530 Owner's Manual

circle around it, add it to a route, or view the Sun & Moon phase or view Hunt & Fish information from it. On-screen buttons at the bottom of the page allow you to Goto the map item, display it on the map or to select **OK** and return to the Map Page. Press the **Page** button to stop panning the map.

To find an item near the map pointer:

1. When using the panning arrow, press and hold the **Thumb Stick In** to display the Shortcuts Menu.
2. Select **Find 'N Go** to display items. Select the category you wish to search (waypoints, contacts, etc.), then select **Near Map Pointer** from the pop-up list. The Rino 530 then searches for the items nearest the location of the map pointer instead of your actual location.



*Map Page with
Panning Arrow*




Programming the Data Fields

Select **Show... Data Fields** to view four optional Data Fields on the right side of the screen that can be programmed to provide a variety of travel and navigation information. A list of the choices is shown to the right. Not all data types are available on every page.

To program a data field:

1. Use the **Thumb Stick** to highlight the data field and then press In to display the list of data options.
2. Highlight the desired option and then press the **Thumb Stick** In to change the data field type.



Changing Data Fields

Data Field Options

Three data field options apply to the Map Page data fields and the Trip Computer data fields. For definitions of these all data fields used in the Rino 530, refer to the “Appendix.”

Bearing	Course	Current Destination
Current Distance	Current ETA	Current ETE
Elevation	Final Destination	Final Distance
Final ETA	Final ETE	GPS Accuracy
Heading	Max Speed	Moving Avg. Speed
Odometer	Off Course	Overall Avg. Speed
Pointer	Speed	Sunrise
Sunset	Time of Day	To Course
Trip Odometer	Trip Time—Movg.	Trip Time—Stopped
Trip Time—Total	Turn	Velocity Made Good
Vertical Speed	Trip Computer Only	Location (lat/lon)
Location (selected)		




P R E L I M I N A R Y

UNIT OPERATION > MAP PAGE

Setting up the Map

The Setup Map option displays the five Map Setup Pages, each accessed by an on-screen button.

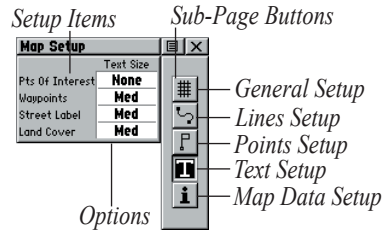

3. Press Left, then Up or Down on the **Thumb Stick** to highlight an item on the list. Press Right to return to the sub-page buttons.
5. Use the **Thumb Stick** to highlight the desired option and then press it In to activate.
6. Press the **Page** button or the on-screen **X** button to return to the Map Page.

To use Map Setup options:

1. Select **Setup Map** from the Option Menu  and then press the **Thumb Stick** In to display the Map Setup Page.
2. Press Up or Down on the **Thumb Stick** to highlight the desired sub-page button, which displays the options list for that sub-page to the left.



General Setup

Orientation—Track Up or North Up; fixes the top of the map display to the current track heading or to a north heading.

Auto Zoom—On or Off; automatically scales the map to display both your current location and the next point to which you are navigating.

Detail—Most, More, Normal, Less, or Least; controls how much map detail you see. This setting only applies to a map feature set to Auto. Those features which have a specified scale or are turned Off are unaffected by this setting.

Lock on Road—On or Off; available only if MapSource Data is loaded; when On the triangle icon locks to the road that you are traveling.

Display Mode—Land or Water.

Tracks Setup

Saved Tracks and Track Log—Scale options; Off, Auto, or 20 ft–500 miles, sets the maximum scale at which the feature should appear on the screen. Some types of data display only at certain zoom scales.

Goto Line—Bearing or Course.

Track Points—Select the number of track points per track. Up to 10,000 active Track Points allowed

Map Features Setup

Points of Interest, Waypoints, Street Label, and Land Cover—Off, Auto, or 20 ft–500 miles, sets the maximum scale at which that feature should appear on the screen. Some types of data display only at certain zoom scales.



P R E L I M I N A R Y

UNIT OPERATION > MAP PAGE

Text Setup

Points of Interest, Waypoints, Street Label, and Land Cover—None, Small, Medium, or Large; control the screen size of the name.

Map Data Setup

Show—Check box; check mark determines if map data is used or not. Option Menu allows you to choose to show all, show none, or show specific MapSource Data. See also the “Appendix.”


Measuring Distance

To use the Measure Distance option:

1. Select **Measure Distance** from the Option Menu  and then press the **Thumb Stick In** to display the Panning Arrow. **Ref** displays under the arrow.

2. Use the **Thumb Stick** to move about on the Map Page until you reach the point to which you want to measure. A new Map Pointer field displays showing the location of the pointer and the direction and distance from where you began the measuring.
3. To begin measuring from a different point, press the **Thumb Stick In** at the desired location.
4. To stop measuring, press the **Page** button.

Map Pointer Field



Measuring distance




Navigation Page

The Navigation Page provides active guidance with a rotating compass ring that shows your course (track) while you are moving and a bearing pointer to indicate the current direction to your destination (bearing) relative to the course.

The Data Field at the top of the page, by default shows you the name of your destination. All five Data Fields can be programmed to display a variety of navigation data. The list of data field choices may be found on page 28 and definitions may be found in the “Appendix.”

The Compass Ring functions as a magnetic compass when you are stationary. When you are moving, the heading is controlled by the GPS receiver (based upon settings customized in the Heading Setup Page).

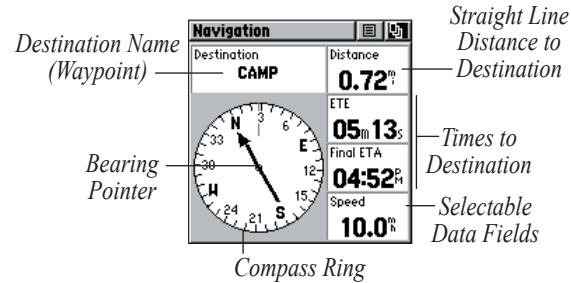

NOTE: The Compass should be calibrated for the greatest accuracy. Refer to page 36 for information on calibrating the compass.

Using the Navigation Page

The two main components of the Navigation page are the Bearing Pointer and Compass Ring. The Bearing Pointer always points directly to the destination, no matter what your current location might be. The Compass Ring displays your heading.



P R E L I M I N A R Y

UNIT OPERATION > NAVIGATION PAGE


While you are navigating a route, the pointer indicates the direction (a bent arrow) of the turn to the next point in the route as well as the direction to the current point when you get within 15 seconds Estimated Time of Arrival of the current point.

For example, if the arrow is pointing straight up, you are going directly to your destination. If it points any direction other than up, turn and move towards the direction the arrow is pointing until it points up, and then continue in that direction. If you are using the Course Pointer option instead and you drift away from the original line of travel to your destination, the Course Deviation Indicator (CDI) provides graphic indication of drift (right or left) and displays the distance off course.

When you are not on an active Goto, Track, or Route (in other words, not traveling to a recorded destination), the window at the top of the page is blank when Destination is selected. The Compass Ring displays your heading

while you are moving, but the data fields to the right of the page will not display any destination related data, such as Estimated Time of Arrival.

CDI Scale



Navigation Page with Course Pointer and Course Deviation Indicator (CDI) Scale active.

To stop navigating:

1. Highlight the on-screen **Option Menu**  button at the top of the Navigation or Map Page and press the **Thumb Stick**.
2. Select **Stop Navigation**, then press the **Thumb Stick**.



P R E L I M I N A R Y

UNIT OPERATION > NAVIGATION PAGE

Navigation Page Options

Sight 'N Go—Use the Sight 'N Go feature to locate a landmark visually and then lock in a magnetic heading to it.


Stop Navigation—Cancels navigation (“Grayed out” or disabled unless you are navigating on a Goto, Track, or Route.)

Bearing Pointer/Course Pointer—Toggles between Bearing (always directed at destination) and Course (distinctive with dots across center of compass, shows amount of correction needed to be back on course.)

Show Data Fields/Big Compass—Toggles to display data fields on the right side of the display or removing the data fields and showing a larger compass.

Calibrate Compass—Calibrates the electronic compass. Follow the on-screen instructions.

Restore Defaults—Returns options and data field choices to factory designations.



Navigation Page Option Menu

To change data fields:

1. Use the **Thumb Stick** to highlight the desired data field and then press it In to display the list of data options.
2. Select the desired option from the list and press the **Thumb Stick** In. The list of data field choices may be found on page 28 and definitions may be found in the “Appendix.”



P R E L I M I N A R Y

UNIT OPERATION > NAVIGATION PAGE

Using Sight 'N Go

To use Sight 'N Go to navigate:

1. Use the **Page** button to access the Navigation Page and then use the **Thumb Stick** to access the **Option Menu** .
2. Use the **Thumb Stick** to highlight **Sight 'N Go** and press In. Note that the compass ring with pointer is in-line with the two sighting marks on the case.
3. Hold the Rino 530 at eye level and line up the two sighting marks on the case with the distant object. Press the **Thumb Stick** to Lock Direction.
4. To navigate to your destination, select **Set Course** and press the **Thumb Stick**. Begin traveling to your destination using the pointer as a guide.
To view your destination as a waypoint, select **Project Waypoint** and press the **Thumb Stick**. To re-sight the destination, press the **Thumb Stick** in when **Re-Sight** is highlighted.

Sighting Marks



**Rino 530 held level
for Sight 'N Go**

Calibrating the Compass

The Electronic Compass must be calibrated outdoors when you first use the Rino 530 and after new batteries have been installed. The accuracy of the Electronic Compass is adversely affected if the unit is not held level or is held near items that generate magnetic fields, such as cars, large belt buckles, etc.

**To calibrate the Electronic Compass:**

1. Use the **Page** button to access the Navigation Page.
2. Use the **Thumb Stick** to highlight the **Option Menu** on-screen button  and press In.
3. Highlight the **Calibrate Compass** option and press the **Thumb Stick** In.
4. Press the **Thumb Stick** to activate the **Start** button and then follow on-screen directions for holding and turning the unit. Hold the unit level when calibrating the compass.



Calibrating the compass: Hold the unit level and face up. Turn the unit around as shown above.

The unit displays a “Just Right,” “Too Fast,” or “Too Slow” message for you to adjust your turning speed as needed.

The “Calibration Successful” message displays when finished. If a “Calibration Failed” message displays, repeat the process.

When you manually turn the Compass Off, it stays off until you manually turn it On again. Sometimes, however, when you turn the Compass On, the Rino 530 overrides the Compass and uses the GPS receiver to track your heading. The criteria for switching between the Compass and the GPS is customized on the Heading Setup Page (see section “Heading Setup Page”).

To turn the compass on and off:

- Press and hold the Zoom (**Z**) button. A message appears on the screen indicating that the compass has been turned on or off.
- Press the **Page** button to access the Main Menu. Select **Setup** and then **System**. Turn the compass on and off through the System Setup Page (see section “System Setup Page”).



PRELIMINARY

UNIT OPERATION > ALTIMETER PAGE

Altimeter Page


The Altimeter Page provides the current elevation, rate of ascent/descent, a profile of elevation changes over distance or time, or a profile of pressure changes over time. The Altimeter Page's Option Menu  allows you to select from a variety of display options such as plotting over time, plotting over distance, displaying the zoom ranges of measurement, viewing elevation or pressure points, and resetting data displays. Two user selectable data fields allow you to display a variety of current and recorded pressure and elevation related data.



NOTE: The Altimeter should be calibrated for the greatest accuracy. Refer to page 41 for information on calibrating the Altimeter.

Profile Field is located in the center of the page and can be configured to display either elevation or ambient pressure plots as selected from the Altimeter Page Option Menu .

Data Fields at the bottom of the page are user selectable and display a variety of recorded or current data.



— Status Window

— Profile Field

Data Fields

Status Window is located at the top of the page and displays the current elevation and your current rate of ascent or descent when moving. It can also display the ambient pressure.



Altimeter Page Options

The Altimeter Page Option Menu  allows you to select the type of information and how it is to be displayed.

Altimeter Page Options include:

Plot Over Time/Distance—Plots the changes in elevation or pressure over a length of time or over a distance. When Plot Over Distance is selected, Plot over Time is displayed in the Option Menu (and vice versa).

View Pressure/Elevation Plot—Displays a record of changes in barometric pressure or elevation for a set period of time.


Zoom Ranges—Sets the zoom range for elevation, distance, or time.

View Points—Shows the elevation, time of day, and date a specific point was created

Reset...—Clears recorded data from the page to begin recording new data.

Calibrate Altimeter—Increases the accuracy of the altimeter. You must know your elevation or pressure to calibrate the altimeter.

Restore Defaults—Returns the Altimeter Page to the original factory settings (defaults).



Altimeter Page Option Menu



P R E L I M I N A R Y

UNIT OPERATION > ALTIMETER PAGE

Viewing Pressure/Elevation Plots

When selecting the View Elevation Plot option, you can plot a profile of elevation changes that occur as you navigate over a set distance or period of time. When you select View Pressure Plot, you can view a record of changes in barometric pressure for a set period of time. When one option is active the other displays on the Altimeter Page Option Menu .

To view elevation or pressure plots:

1. Use the **Thumb Stick** to highlight the desired option from the Option Menu and then press In to display the plot.
2. Adjust time and distance measurement as desired using the Elevation Plot Zoom Ranges feature explained below.
3. To clear the plot and start a new one, you must clear the Track Log.


Adjusting the Zoom Ranges

You can set the Zoom Ranges for elevation, distance, or time when you display the View Elevation Plot. You may

change the ranges for the vertical distance and the time. Ranges for View Pressure Plot are fixed at 6.8 millibars and 12 hours.

To adjust zoom ranges:

1. Select the type of plot you want to display and use the **Thumb Stick** to highlight **Zoom Ranges** from the Option Menu.
2. Press the **Thumb Stick In** to display the Zoom Ranges Page.
3. Move the **Thumb Stick Up** or **Down** to adjust the vertical distance and **Left** or **Right** to adjust either the time or distance. Press In to return to the Plot Page.




Zoom Range selection



Viewing Points

The View Points option allows you to scroll through the stored elevation profile and to view a single point along the profile. When the pointer is stopped at a location along the profile, the display shows the elevation, time of day and date the point was created.



View Points Option Page

To use the View Points option:

1. Use the **Thumb Stick** to access the Option Menu.
2. Highlight the **View Points** option and press the **Thumb Stick In** to display the View Points Page.
3. Move the Thumb Stick Right or Left to scroll the profile past the pointer in the center of the page.

As the profile moves past the pointer, the status window at the top of page changes to display the date, time, and altitude for the point beneath the pointer.

Resetting Data

You can reset the elevation data and the maximum elevation data by selecting the Reset option from the Altimeter Page Option Menu .

To reset the elevation data and max elevation fields:

1. Use the **Thumb Stick** to highlight the **Reset** option from the page Option Menu and press the **Thumb Stick In** to display the Reset page.
2. Use the **Thumb Stick** to highlight the reset options on the page and then press the **Thumb Stick In** to place a check mark in the box next to a selected item.
3. Move to the **Apply** button and press the **Thumb Stick In** to reset the data fields.



P R E L I M I N A R Y

UNIT OPERATION > ALTIMETER PAGE

Calibrating the Altimeter

Because the Rino 530 relies on the Barometric pressure to determine the elevation and the pressure at any given elevation can fluctuate, you can calibrate the altimeter to increase its accuracy. You must know the elevation or pressure at your current location, information you can obtain from a map or other reliable source.

To manually calibrate the altimeter:

1. Use the **Thumb Stick** to access the Option Menu.
2. Highlight the **Calibrate Altimeter** option and press the **Thumb Stick** to display the Calibration Page.
3. At the message asking "Do You Know The Correct Elevation?" highlight the on-screen **Yes** button and press the **Thumb Stick** In to enter your elevation. When finished, highlight **OK** and press it In to return to the Altimeter Page.

Or At the message asking "Do You Know The Correct Pressure?" highlight the on-screen **Yes** button and press the **Thumb Stick** In to enter your elevation. When finished, highlight **OK** and press it In to return to the Altimeter Page.

Programming Data Fields

The two user-selectable data fields support this page and can be programmed to display the data options listed to the right.


To program a data field:

1. Use the **Thumb Stick** to highlight the desired data field and then press it In to open the data field option pop-up window.
2. Use the **Thumb Stick** to move Up or Down the menu to highlight a desired data option and then press In to place it in the data field.




Trip Computer Page

The Trip Computer Page by default displays up to seven different types of navigation data. Choosing **Big Numbers** will display 2 large data fields.



Trip Computer	
Trip Odom	Max Speed
227 ^f	3.5 ^m
Moving Time	Moving Avg
03:03 _s	0.8 ^m
Stopped	Overall Avg
10:22 _m	0.0 ^m
Location	
N 38°52.631' W094°47.076'	

*Trip Computer Page,
Small Numbers*



Trip Computer	
Trip Odom	
514 ^f	
Speed	
10.0 ^m	

*Trip Computer Page,
Big Numbers*

Each data field is selectable and can contain one of many data information options. The default settings for these fields are shown in the illustration. The list of data field choices may be found on page 28 and definitions may be found in the “Appendix.” When the data field title is selected, press the **Thumb Stick In** to select a new data field choice.



Selecting a data field

By selecting the information options that you prefer and arranging them in a desired order on the page, you can customize the Trip Computer Page to meet your navigation needs.

Trip Computer Page Options

The Option Menu allows you to reset the Trip Computer data when you are ready to start a new trip, choose between Big or Small Numbers, and Restore Defaults.

Reset—Clears recorded data from the page to begin recording new data.

Big/Small Numbers—Changes the display from seven small data fields to two large data fields.

Restore Defaults—Returns the Trip Computer Page to the original factory settings (defaults).




P R E L I M I N A R Y

UNIT OPERATION > MAIN MENU PAGE

Main Menu Page

The Main Menu provides access to additional Rino 530 feature pages. The pages listed below provide enhancements to Rino 530 operation. Press the **Page** button repeatedly to cycle to the Main Menu or select it from the Main Page Menu at the top of each main page.



Main Menu Page

Using the Main Menu

The Main Menu allows access to many features and pages in the Rino 530. Please refer to the “Features” section for a complete description of the items accessed through the Main Menu.

Mark Waypoint Page—Allows you to mark and store a waypoint for your current location or a map pointer location.

Find ‘N Go Menu—Allows you to locate and Goto Waypoints, Favorite Locations, Cities, Interstate Exits, Points of Interest, Addresses, and Intersections. (Some require MapSource data.)

Routes Page—Allows you to create and store routes for repeated use.

Tracks Page—Provides access to the track log, saved tracks, and contact tracks.

Proximity Page—Allows you to set a proximity alert distance around contacts or waypoints.

Satellite Page—Provides a picture of the satellite signal tracking and tells you when the unit is ready to navigate.



Setup Page—Allows tailoring of items such as time format, units of measure, display backlighting timeout and contrast adjustment, heading selection, interface setups, and system software information.

Calendar Page—Provides you with a monthly calendar with programmable reference notes.

Alarm Clock—Provides a settable 24-hour alarm clock.

Calculator—Provides a calculator feature available in two forms: Standard or Scientific.

Stopwatch Page—Allows you to use the unit as a stopwatch, including a lap timer.

Sun & Moon Page—Shows a graphic display of both the Sun & Moon locations at various times, dates, and locations.

Hunt & Fish Page—Provides you with a listing of best times for hunting and fishing for a chosen location.

Area Calculation Page—Use this function to calculate area as you move around.

Games Page—Games are provided as an entertainment feature.

Many of the items in the Main Menu Page are discussed in-depth in the “Features” section. Refer to the specific section for more information.



P R E L I M I N A R Y

UNIT OPERATION > MAIN MENU PAGE

Main Menu Options

Through the Main Menu you can establish the sequence of pages.

Page Sequence Setup

You may add, remove, or reorder any of the Main Pages, plus additional pages. The default Main pages are Radio, Map, Navigation, Altimeter, Trip Computer, and Main Menu. The Main Menu cannot be removed from the page sequence. If a page is added to the Main Page Sequence, it does not appear in the Main Menu.

To move, insert or remove a Main Page:

1. From the Main Menu, highlight the **Option Menu** on-screen button  and press the **Thumb Stick In**. Highlight **Page Sequence Setup** and press In.
2. To move a page in the page sequence, highlight the page and press In. Select **Move** then move the Menu item Up or Down using the **Thumb Stick**. When the desired position is displayed and press the **Thumb Stick In**.

3. To insert a new page, highlight the page you wish to insert it before and press In. Select **Insert**, then choose a page from the list and press the **Thumb Stick In**.

To remove a page in the order, highlight the page and press In. Select **Remove** and press the **Thumb Stick In**.



Inserting a new page in the Page Sequence



Shortcuts Menu

The Shortcuts Menu is accessed by pressing the **Thumb Stick** In until the menu pops up on the middle of the display. The Shortcuts Menu can be accessed from most pages.



Shortcuts Menu

Mark Waypoint—Marks your current location as a waypoint. Opens the Mark Waypoint page that allows you to customize the waypoint information as well as Goto or show on the Map.

Find 'N Go—Opens the Find 'N Go Page. From the Find 'N Go page, you can find waypoints, contacts, cities, and exits. You may also find Points of Interest, addresses, and intersections if a MapSource product is loaded into the Rino 530.

Weather Radio—Toggles between the Weather Radio and the FRS/GMRS Radio.

Send Note—Sends a note to other Rino 530 users.

Enable Keylock—Enables keylock so buttons are not inadvertently pushed. Press and hold the Page button to unlock the buttons.



P R E L I M I N A R Y


UNIT OPERATION > WAYPOINTS

Waypoints

There are numerous ways to create, edit, and use waypoints. Using the Mark Waypoint Page and the Find 'N Go Menu are two common pages for creating and editing waypoint. You can also create a waypoint using the Map Page. The Rino 530 holds up to 500 waypoints.

Mark Waypoint Page

The Mark Waypoint Page allows you to mark and record your current location as a waypoint and appears with a graphic name block (man with a flag) that displays the assigned number for that waypoint and a waypoint symbol.

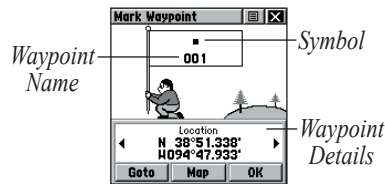

Mark Waypoint Page

To mark your current location and open the Mark Waypoint Page:

1. Press and hold the **Thumb Stick In** until the Shortcuts Menu opens.
2. Highlight **Mark Waypoint** and press the **Thumb Stick In**. The Mark Waypoint Page opens. You can also access this page by highlighting **Mark** on the Main Menu Page and pressing the **Thumb Stick In**.
3. To save the waypoint, highlight **OK** and press the **Thumb Stick In**. If you do not want to save it as a new waypoint, press the **Page** button to cancel.

To change Mark Waypoint Page Options:

- To change the name of the waypoint, use the **Thumb Stick** to highlight the waypoint name field.
- To assign an identifying symbol to a waypoint, use the **Thumb Stick** to highlight the symbol block just above the waypoint name.
- To view the waypoint details, highlight the details field and press Left or Right on the **Thumb Stick** to change to the next data field.



Creating Waypoints

To create a waypoint for a map feature:

1. With the Pan Map feature active, move the panning arrow (map pointer) to the map item you want and highlight it.
2. Press In and release the **Thumb Stick** to display the item information page.
3. With the Information Page displayed, highlight the **Option Menu** button  at the top of the page and then press the **Thumb Stick** to open the menu.
4. Highlight **Save As Waypoint** and press the **Thumb Stick** to save the item as a waypoint.



Saving a map feature as a waypoint

To create a waypoint using the panning arrow:

1. With the Pan Map feature active, move the panning arrow (map pointer) on the map to the location you want to mark, then press the **Thumb Stick**.
2. The Mark Waypoint Page displays, automatically assigning a number to the waypoint.

To create a waypoint by manually entering its coordinates (lat/lon):

1. Press In and hold the **Thumb Stick** to access the Shortcuts Menu. Highlight **Mark Waypoint** and press In. You can also use the Find 'N Go to view a previous waypoint.
2. Highlight the details field and press Left or Right on the **Thumb Stick** to change to the Location field. Press In and enter the new coordinates using the on-screen numerical keyboard. Highlight and press **OK** when finished.
3. You may also change the waypoint name and/or symbol or add notes.



P R E L I M I N A R Y


UNIT OPERATION > WAYPOINTS

Projecting a Waypoint

Projecting a waypoint from any map item (another waypoint, etc.) allows you to establish a new waypoint on a bearing and distance projected from that map item.

To project a waypoint:

1. Select a map item from the Find 'N Go Menu.
2. Highlight the **Option Menu** on-screen button  at the top of the Information Page and press the **Thumb Stick** In to display the options. Highlight **Project Waypoint** and press In.
3. Highlight either the bearing or distance field, then press the **Thumb Stick** In to display the numerical keyboard. Enter the new bearing or distance, then highlight **OK** and press In to finish.



Project Waypoint Page

Editing a Waypoint

A waypoint or contact can be edited to add notes or change the map symbol, name, coordinates, or elevation. You can also delete a waypoint or contact.


To edit a waypoint:

1. Use the Find 'N Go Menu to display the waypoint/contact or highlight it on the Map Page and press the **Thumb Stick** In.
2. To make changes to the waypoint map symbol, name, location coordinates, elevation fields and notes, highlight the desired field and press the **Thumb Stick** In to display the keyboard. (For Notes, highlight **Edit** and press In to start entering data, up to 30 characters.) Select **OK** and press the **Thumb Stick** In to finish.
3. Highlight the **OK** button then press the **Thumb Stick** to save the changes.



To delete a waypoint or contact:

1. Use the Find 'N Go feature to display the point.
2. Highlight the **Delete** button and then press the **Thumb Stick In**. Confirm the deletion.



Deleting a waypoint

To move a waypoint by dragging it:

1. Use the Find 'N Go Menu to display the Waypoint Page for the waypoint you want to move.
2. Highlight and press the **Map** on-screen button to display the waypoint on the map.
3. With the waypoint highlighted by the panning arrow, press In and release the **Thumb Stick**. The word "Move" displays beneath the panning arrow.

4. Use the panning arrow to drag the waypoint to the new location and then press the **Thumb Stick In** to place it.

Press the **Page** button before pressing the **Thumb Stick** to cancel moving the waypoint and return to the Main Pages.

To save Map or Find 'N Go items as waypoints:

1. Access the Information Page for the desired item (highlighted from the map or selected from the Find 'N Go Menu).
2. Open the **Option Menu** at the top of the page, select **Save As Waypoint**.
3. Press the **Thumb Stick In** to save the item to the Waypoints List.
4. Highlight **Save As Waypoint** and press the **Thumb Stick In**.



P R E L I M I N A R Y


UNIT OPERATION > FIND 'N Go

Find 'N Go

The Find 'N Go Menu allows you to find stored locations (waypoints) and map items (cities, exits, etc.). They can be found by name or by those nearest to your current location. If you are using certain MapSource data, the list of find locations is expanded to include categories for Points of Interest, Street Addresses, and Intersections. If you would like to use an option that is grayed out (disabled), you need to load map detail using MapSource.

To access the Find 'N Go Menu:

1. Press and hold the **Thumb Stick In** to access the Shortcuts Menu.
 2. Highlight **Find 'N Go** and press In.
- Or
1. Press the **Page** button or the on-screen **Main Page Menu** button to display the Main Menu.
 2. Highlight the **Find 'N Go** icon and press the **Thumb Stick In**.



Find 'N Go Menu

Categories are listed in two different ways: By Name and Nearest. The By Name list contains every item in the map database for the selected category, while the Nearest list contains only those items that are near to your Current Location or the Map Pointer.


These pages are structured with a set of sub-menus and location information pages that guide you through the process of finding locations.



Finding a Waypoint

Waypoints that you have created and stored in the Rino 530 can be found by selecting the **Waypoint** option from the Find 'N Go Menu. You can find a waypoint from the list of waypoints using the By Name or Nearest options as explained on the previous page. When selected from the list, the waypoint displays on the Waypoint Information Page.

The Waypoint Information Page displays the waypoint name or number, a map symbol, the location in lat/lon, elevation, distance, bearing, and three on-screen buttons for Goto, Map, and OK functions.



*Nearest Waypoints selected
in Find 'N' Go Menu*

To find a waypoint by nearest:

1. Use the Thumb Stick to select **Waypoint** from the Find 'N Go Menu. Press the **Thumb Stick In** to select **Nearest** from the pop-up menu. Press the **Thumb Stick In** to display the Waypoints List.
2. Use the **Thumb Stick** to select the desired waypoint from the list and then press the **Thumb Stick In** to display the Information Page for that waypoint.
3. With the Information Page displayed, select **Goto** to create a direct line of travel to the waypoint. Select **Map** to view the waypoint location on the map or select **Delete** to delete the waypoint.
4. Press the **Option Menu** button  to access additional features. You can select: Send Location (to other Rino users), Project Waypoint, Set Proximity (alarm), Add to Route, View Sun & Moon (reports for that waypoint), View Hunt & Fish (reports for that waypoint), or Reposition Here.



P R E L I M I N A R Y

UNIT OPERATION > FIND 'N Go

To find a waypoint by name:

1. Use the **Thumb Stick** to select Waypoint from the Find 'N Go Menu. Press the **Thumb Stick In** to select **By Name** from the pop-up menu. Press the **Thumb Stick In** to display the Waypoints List.



Find 'N Go Menu

2. Use the **Thumb Stick** to enter the name of the waypoint that you would like to find.



Entering a waypoint
name to find By Name


3. Select **OK** when you are finished entering the name. The waypoint list opens with the name closest to the name you entered on the top.
4. Select the desired waypoint from the list and then press the **Thumb Stick In** to display the Information Page for that waypoint.
5. With the Information Page displayed, select **Goto** to create a direct line of travel to the waypoint. Select **Map** to view the waypoint location on the map or select **Delete** to delete the waypoint.
6. Press the **Option Menu** button  to access additional features. You can select: Send Location (to other Rino users), Project Waypoint, Set Proximity (alarm), Add to Route, View Sun & Moon (reports for that waypoint), View Hunt & Fish (reports for that waypoint), or Reposition Here.



UNIT OPERATION > FIND 'N Go PRELIMINARY

Finding a Contact

Contacts that you have received in the Rino 530 can be found by selecting the 'Contacts' option from the Find 'N Go Menu.




Contact List

To find a contact:

1. From the Find 'N Go Menu, highlight **Contacts** and press the **Thumb Stick** In.
2. From the Contacts List, select the desired contact and press the **Thumb Stick** In.
3. With the Contact Information Page displayed, select **Goto** to create a direct line of travel to the contact. Select **Map** to view the contact's location on the map or select **Delete** to delete the contact.

If the contact did not have a GPS location on the last transmission, a question (?) mark appears below the flag. To view the contact details, highlight the details field and press Left or Right on the **Thumb Stick** to change to the next data field.



Contact Information Page

4. Press the **Option Menu** button  to access additional features. You can select: Poll location, Send Location (to other Rino users), View Track, Project Waypoint, Save as a waypoint, or Set Proximity (alarm).



P R E L I M I N A R Y

UNIT OPERATION > FIND 'N GO

Finding a City

Cities can be found by selecting the **Cities** option of the Find 'N Go Menu, selecting the city from the list of **Nearest** or **By Name**, and then displaying the City Information Page.

The City Information for the selected city displays, including the city name, the size by population, and distance from your location. You can view it on the map, or create a Goto direct route to the city from your current location or from a location defined by the Panning Arrow (Map Pointer). You can also save the city as a waypoint or add it to an existing route.

To find a city:

1. Use the **Thumb Stick** to select the **Cities** option, then press it In to display the find **Nearest** or find **By Name** prompt. Selecting **By Name** displays the keyboard as an alternative scrolling through the list of nearest cities. If you are currently panning the map, the option **Near Map Pointer** appears in place of the **Nearest** option.

2. If using find **By Name**, begin spelling the name of the city by using the keyboard. When you have entered enough characters to define the name, a match list displays. If you are using find **By Nearest** or **Near Map Pointer** scroll through the list to find the city you want. Use the **Thumb Stick** to select the desired city from the list and then press it In to display the Information Page for that city.
3. With the Information Page displayed, you can select **Goto**, **Map**, or **OK** options.
4. Press the **Option Menu** button  to access additional features. You can select: Send Location (to other Rino users), Project Waypoint, Save as a Waypoint, Set Proximity (alarm), Add to Route, View Sun & Moon (reports for that waypoint), or View Hunt & Fish (reports for that waypoint).



Find Nearest Cities List



UNIT OPERATION > FIND 'N Go PRELIMINARY

Finding an Exit

You can use the Find Exit option to locate a nearby exit on an interstate highway. Exits are listed only by Nearest. Exit information pages provide a variety of information about services near each exit, such as rest stops, lodging, restaurants, and service stations. Some services such as service stations on this page can be selected and a separate information page displays with specific information concerning what types of fuel, mechanical, and food services are available.

To find an exit:

1. Use the **Thumb Stick** to highlight **Exits** and then press it In to display the Exit List.
2. Highlight and select an exit type by pressing the **Thumb Stick** In.
3. A list of exits nearest to you displays. The title box indicates the interstate highway that is served by the exits. Two fields at the bottom of the page indicate distance and bearing to the exit. Scroll through the list to highlight the desired exit.

4. Press the **Thumb Stick** In to display the Information Page for that exit. This page contains the exit description with a list of available services near that exit along with the distance and bearing fields.
5. Use the **Thumb Stick** to move to the list of services and highlight a selection from the list.
6. Press the **Thumb Stick** In to display the Information Page for the selected service.

The Exit Services Information Page displays the name of the service, its direction from the exit, and a list of the services available, each marked by a check.

At the bottom of these Information Pages are on-screen buttons for **Goto**, **Map**, and **OK**.

7. Press the **Option Menu** button  to access additional features. You can select: Send Location (to other Rino users), Project Waypoint, Save as a Waypoint, Set Proximity (alarm), Add to Route, View Sun & Moon (reports for that waypoint), or View Hunt & Fish (reports for that waypoint).



P R E L I M I N A R Y

UNIT OPERATION > FIND 'N Go

Finding a Point of Interest

You can use the Find Points of Interest option to locate a nearby restaurant, lodging, landmark, public building, park, etc. However, you must have transferred a MapSource MetroGuide map to the unit map database. Otherwise, this option, plus Address and Intersection options, are grayed out and are not functional. Here is a list of Point of Interest categories:

- Food & Drink
- Lodging
- Attractions
- Entertainment
- Shopping
- Services
- Transportation
- Emergency & Govt.
- Manmade Places

In many instances, these categories are subdivided into types, such as in the instance of Food & Drink. When you select Food & Drink from the list of categories, you are then presented with a list of types that includes All Types and cuisine options such as American, Asian, Barbecue, Chinese, Deli/Bakery, International, Fast Food, Italian, Mexican, and many more.



Food & Drink types


Once you have selected an item, you can display the Information Page for that item. You can then use the on-screen buttons to Goto or view the location on the Map; or use the Option Menu  for more choices.



UNIT OPERATION > FIND 'N Go PRELIMINARY

To find a point of interest:

1. Use the **Thumb Stick** to highlight **Points of Interest** and then press it In to display the Points of Interest Categories List.
2. Use the **Thumb Stick** to select the desired category and then press it In to display the Types List.
3. Use the **Thumb Stick** to select the desired type and then press it In to display the list for that type.
4. Use the **Option Menu**  at the top of page to select from either **By Name** or **Nearest** options. Selecting **By Name** displays a keyboard allowing you to enter the characters of the name you want. A list of matches displays when enough characters are entered.
5. Use the **Thumb Stick** to highlight your selection from the list and then press it In to display the Information Page for that item.
6. Use the on-screen buttons to **Goto** or view on the **Map**, or use the page **Option Menu**.
7. Press the **Option Menu** button  to access additional features. You can select: Send Location (to other Rino users), Project Waypoint, Save as a Waypoint, Set Proximity (alarm), Add to Route, View Sun & Moon (reports for that waypoint), or View Hunt & Fish (reports for that waypoint).



Nearest Food & Drink



P R E L I M I N A R Y


UNIT OPERATION > FIND 'N Go

Finding an Address or Intersection

You can enter a street number, choose a street name from a list and find an address within the area of map data coverage or enter two street names and locate the intersection. To use these options, however, you must be using a MapSource product that provides this type of map data.

To locate an address:

1. Use the **Thumb Stick** to highlight **Address** and press it In to display the **Find Address** page.
2. Highlight the **Number** field and use the keyboard for entering numbers.



Entering an Address


3. Move to the **Street** field using the **Thumb Stick**.
4. Press the **Thumb Stick In** to display the Select Street Name list. Find the street by using the keyboard to enter characters until a list appears.
5. With the desired street highlighted, press the **Thumb Stick In** to place the street name on the Find Address page. Repeat this process for city and postal codes, if desired. A window at the bottom of the page displays a list of matches and the quality of each match. You may also use the Option Menu to **Clear City**, **Clear Postal Code** or **Clear All**.
6. Use the on-screen buttons at the bottom of the page to **Goto**, view the item on the **Map**, **OK** to close, or use the Option Menu for other choices.



UNIT OPERATION > FIND 'N Go PRELIMINARY

To locate an intersection:

1. Display the Find 'N Go Menu and use the **Thumb Stick** to highlight the **Intersection** category and press it In to display the **Find Intersection** page.
2. Highlight the first **Street** field and then press the **Thumb Stick** In to display the Street list.
3. Enter the name of the street in the name field at the top of the list using the keyboard data entry method discussed in the *Quick Start Guide*. Once you have spelled enough of the street name, a list of matches displays, often with several streets on the list. Press the **Thumb Stick** In to move the highlight to the street list and then scroll up or down until you find the street name you want. Press it In to place the name in the field.



Finding an Intersection

4. Highlight the best match and then press the **Thumb Stick** In to display the Information Page for the intersection. Use the on-screen buttons at the bottom of the page to **Goto**, view the item on the **Map**, **OK** to close, or use the Option Menu for other choices.



P R E L I M I N A R Y

UNIT OPERATION > FIND 'N GO

Finding a Last Found Place

You can use the Recently Found Places option to locate Points of Interest, Cities, Waypoints or Contacts and Intersections and other locations you have recently retrieved. The process for finding recent points from the Find 'N Go list is the same as finding a regular waypoint.

To find a Last Found Place:

1. Use the **Thumb Stick** to select the **Last Found Places** option from the Find 'N Go List and then press it In.



Sub-page buttons

Last Found Places Page

2. Press Up or Down on the **Thumb Stick** to highlight the desired sub-page button, which will display the options list for that sub-page (Points of Interest, Cities, Waypoints/Contacts or Intersections) to the left.
3. Press Left then Up or Down on the **Thumb Stick** to highlight an item on the list and press the **Thumb Stick In** to display the Information Page for that item. Press Right to return to the sub-page buttons.
4. With the Information Page displayed, you can select **Goto** to create a direct line of travel to the item. Select **Map** to view the waypoint location or select **OK**. For Waypoints and Contacts, you may also choose to **Delete** to permanently remove that item.
5. Use the page Option Menu to send the location of that point, project a new waypoint from its location, set a proximity circle, add the item to an existing route, or view sun/moon or hunt/fish position data for this time and date.




Weather Radio

The Weather Radio can be turned on and off through the Shortcuts Menu or the Option Menu in the Radio Page. You may also enable Weather Alerts from the Radio Page. Refer to the “Radio Page” section for complete information about the Weather Radio and Weather Alert.

To turn the Weather Radio on and off:

1. Open the Radio Page by pressing the **Page** button or using the on-screen Main Page Menu button .
2. Use the **Thumb Stick** to highlight the **Option Menu** on-screen button  and then press the **Thumb Stick In** to display the menu.
3. When **Use Weather Radio** is highlighted, press the **Thumb Stick In** to turn on the Weather Radio. You can select **Enable Weather Radio** after the Weather Radio is on.
4. To turn the Weather Radio off, press the **Thumb Stick In** when **Use FRS/GMRS Radio** is highlighted. This will switch the Rino 530 back over to the FRS/GMRS radio.



Radio Page with Weather Radio on



NOTE: You can also turn on and off the Weather Radio through the Shortcuts Menu. Press and hold the **Thumb Stick In** to open the Shortcuts Menu.

When the Weather Radio is on, **Enable Weather Alert** is added at the bottom of the option menu. Press the **Thumb Stick In** when **Enable Weather Alert** is highlighted to turn the feature on. You can then turn the Weather Radio off and continue normal FRS/GMRS radio operations. When a Weather Alert is detected, the Rino 530 will break into any FRS/GMRS transmission to automatically turn on the Weather Radio and broadcast that alert. Select **Disable Weather Alert** to turn off that feature.



P R E L I M I N A R Y


UNIT OPERATION > SENDING A NOTE

Sending a Note

You may send a note to other Rino 530 users. When you send a note, it appears along the bottom of the display on every Rino 530 user who is using the same Channel and Squelch Code that you are using. The Send Note feature is great when you are trying to get the group to meet at a certain location or tell everyone in the group something in a silent manner.

To send a saved note:

1. Press the **Thumb Stick In** until the Shortcuts Menu appears.
2. Select **Send Note** and press the **Thumb Stick In** to open the Send Note Page.
3. Select a note from the Saved Notes list and press the **Thumb Stick In**.
4. The selected note appears in the Edit Note field. Press the **Thumb Stick In** to edit the Saved Note. Refer to the *Quick Start Guide* for information on entering data using the on-screen keyboard.



Send Note Page

When you are done editing the note, push the **Thumb Stick In** when **OK** is highlighted on the keyboard.

5. Select **Send** to send the note to all users. Select **Save** to save the note. Select **Clear** to delete the note.

To send a new note:

1. Press the **Thumb Stick In** until the Shortcuts Menu appears in the middle of the screen.
2. Select **Send Note** and press the **Thumb Stick In** to open the Send Note Page.
3. The Edit Note field is highlighted when the page opens. Press the **Thumb Stick In** to create a note. When you are done editing the note, push the **Thumb Stick In** when **OK** is highlighted on the keyboard.
4. Select **Send** to send the note to all users. Select **Save** to save the note. Select **Clear** to delete the note.



UNIT OPERATION > USING A GOTO PRELIMINARY

Using a Goto

The Goto function allows you to create a direct route to a destination, (waypoint, city, or point of interest). Once you have accessed the Information Page for an item, use the Goto button at the bottom of the page to initiate travel, using the Map and Navigation Pages for guidance.


To activate a Goto:

1. Use the Find 'N Go Menu to access the Information Page for any desired destination and use the **Thumb Stick** to highlight the **Goto** button.
2. Press the **Thumb Stick In** to start navigation.
3. Observe the Navigation Page, it displays the name of your destination, the distance from your current location, and a Bearing Pointer indicating the direction you should travel. The time required to reach your destination displays when you begin to travel and establish a predictable rate of movement. The Data Fields to the right of the page display information relative to your travel.

4. Use the **Page** button or Main Page Menu to access the Map Page and observe your movements and a dark line indicating the direct path from your current location to your destination.
5. Use the Bearing Pointer on the Navigation Page to maintain travel in the right direction and observe distance and time information to monitor your progress.

When you are close to your destination, an “Arriving at Destination” message appears. If you move past the destination the Bearing Pointer reverses and the distance increases.

To stop navigation, select the on-screen **Option Menu** button  at the top of the Navigation or Map Page. Select **Stop Navigation**, then press the **Thumb Stick In**.



Viewing a Goto on the Map Page

Rino® 530 Owner's Manual




P R E L I M I N A R Y

UNIT OPERATION > ROUTES PAGE

Routes Page

Route navigation allows you to create a sequence of intermediate waypoints that leads you to your final destination. The Rino 530 stores 20 routes, each with up to 50 waypoints. A route can be created and modified from the Route Page, and waypoints can be added to a route from the Find 'N Go Menu. More complex routes can be created using a PC and MapSource mapping programs and then transferred to the unit's memory.



Routes List Page

Creating and Using a Route

To create a route:

1. Access the Routes page from the Main Menu. The page has a **New** button, a list of routes, and the number of unused routes.
2. Use the **Thumb Stick** to highlight the **New** button and press it In to display the Route Setup Page.

3. With an empty row (dashed) in the route list highlighted, press the **Thumb Stick** In to display the Find 'N Go Menu.
4. Select a route waypoint from one of the Find 'N Go Menu categories and display the Information Page for the selected waypoint, city, exit, point of interest, etc. Highlight the on-screen **Use** button and press the **Thumb Stick** In to place it on the Routes List.
5. To add more waypoints to the route, repeat the process in Steps 3 and 4. The route is named for the first and last waypoints on the route.

You can add waypoints to the end of an existing route at any time by using the Find 'N Go Menu.



UNIT OPERATION > ROUTES PAGE PRELIMINARY


To add a Find 'N Go Menu item to a route:

1. Select an item from the Find 'N Go Menu and display its Information Page. If a contact is used in a route, the route changes as the contact's position is updated, or it may be saved as a Waypoint to serve as a stationary point.
2. Select the page **Option Menu** and select **Add To Route** to display the Routes List.
3. Highlight and select the route desired and then press the **Thumb Stick In**. A "Waypoint Added Successfully" message displays.

Editing a Route

To remove all waypoints:

1. From the Route Page, select the on-screen **Option Menu** button  and press the **Thumb Stick In** to access the Option Menu.
2. Highlight the **Remove All** option and then press the **Thumb Stick In** to remove all waypoints from the list. When you see the prompt "Do you really want to remove all waypoints from the route?", select **Yes**.



Route Options

To reverse the route:

1. From the Route Page, select the on-screen page **Option Menu** button  and press the **Thumb Stick In** to access the Option Menu.
2. Highlight the **Reverse Route** option and then press the **Thumb Stick In** to reverse the order of waypoints in the list. To change the route back to the original order, repeat this process.



P R E L I M I N A R Y

UNIT OPERATION > ROUTES PAGE

To copy the route:

1. From the Route Page, select the on-screen page **Option Menu** button  and press the **Thumb Stick In** to access the Option Menu.
2. Highlight the **Copy Route** option and then press the **Thumb Stick In** to copy. The copied route displays on the Routes Page and is named the same but followed by the numeral 1 (one). You may then rename and/or modify the copied route.

To delete the route:

1. From the Route Page, select the on-screen page **Option Menu** button  and press the **Thumb Stick In** to access the Option Menu.
2. Select **Delete** and then press the **Thumb Stick In**. When you see the prompt "Do you really want to delete route?", select **Yes**.

To restore default settings for the route:

1. From the Route Page, select the on-screen page **Option Menu** button  and press the **Thumb Stick In** to access the Option Menu.

2. Select **Restore Defaults** and then press the **Thumb Stick In** to restore factory settings.

To review a route point:

1. Select the point from the Route Points List and press the **Thumb Stick In** to access the Option Menu for the waypoint.
2. Highlight **Review** and then press the **Thumb Stick In** to display the Information Page.
3. Highlight the on-screen **OK** button and then press the **Thumb Stick In** to return to the Route List.

To insert a new point on the route list:

1. Select the row where you want the new point inserted before. Press the **Thumb Stick In**.
2. Highlight **Insert** and press the **Thumb Stick In** to display the Find 'N Go Menu and select a new waypoint, city, exit, point of interest, etc.



UNIT OPERATION > ROUTES PAGE PRELIMINARY

3. With the new point highlighted, press the **Thumb Stick In** to display the Information Page for the new point and then select the on-screen **OK** button to add it the route.



Route point review options

To remove a point from the route list:

1. Select the point that you want to remove from the Route Waypoints List and press the **Thumb Stick In**.
2. Highlight **Remove** and press the **Thumb Stick In** to remove the waypoint from the list.

To change a route point:

1. Select the waypoint that you want to change from the Route Waypoints List and press the **Thumb Stick In**.
2. Highlight **Change** and press the **Thumb Stick In** to display the Find 'N Go Menu or create a new waypoint and add it to the points list.
3. Select a new waypoint, access its Information Page and press the on-screen **Use** button to replace the old route waypoint.

To move a route point:

1. Select the point from the Route Points List and press the **Thumb Stick In**.
2. Highlight the **Move** option and press the **Thumb Stick In** to select the waypoint.
3. Use the **Thumb Stick** to move the point up or down in the list. Press the **Thumb Stick In** to leave the waypoint in the new list order.



P R E L I M I N A R Y

UNIT OPERATION > ROUTES PAGE

Adding or Editing from the Route Map Page

You can use the panning arrow with the Route Map Page displayed to add or edit route waypoints.

To add a point at either end of a route:

1. Select the Route from the Routes List. Press the **Thumb Stick In** to display the Route Page.
2. Highlight the on-screen **Map** button at the bottom of the page and press the **Thumb Stick In** to display the Route Map Page.
3. Use the **Thumb Stick** to move the panning arrow to either end of the displayed route until the end point is highlighted. Then press the **Thumb Stick In** and select **Add Turns**. This option appears only when highlighting the end point of a route.
4. Move the panning arrow to a map item or location where you would like to extend the route and press the **Thumb Stick In** to display the Information Page for the new point.

5. Press the on-screen **Use** button to return to the map page and then press the **Thumb Stick In** again to place the new waypoint.

To add a route point within a route:

1. Follow steps 1 and 2 in the previous instructions.
2. Use the **Thumb Stick** to move the panning arrow to a route line. When the arrow touches the line, the line becomes thin. Press the **Thumb Stick In** to display the word **ADD** next to the line.
3. Drag the line to a map item or other location where you want to establish a new waypoint and then press the **Thumb Stick In** to place the new waypoint. A waypoint information page displays. Press the on-screen **OK** button to save the new waypoint, then press it again after returning to the Route Map.



UNIT OPERATION > ROUTES PAGE PRELIMINARY

To review or remove a route point:

1. Select the Route from the Routes List. Press the **Thumb Stick In** to display the Route Page.
2. Use the **Thumb Stick** to highlight the desired route and press In to display the Route Page.
3. Use the **Thumb Stick** to move the map panning arrow to the point you want to review and press In.

Select **Review** or **Remove** and press In again to either display the Information Page or remove it from the route.


Select **Next** and press In again to view the next waypoint.

Navigating a Route

A Route can be navigated using the Map Page or the Navigation Page. The Map Page displays your movement, the route line, and waypoints on the route. The Navigation Page shows compass direction and a bearing pointer.

To navigate a route:

1. Select a route from the Routes List and then press the **Thumb Stick In**.
2. Highlight the on-screen **Navigate** button at the bottom of the page and then press the **Thumb Stick In** to begin navigating the route. The screen changes to the Navigation Page.
3. Move to the Map Page to view the route and your current location.
4. Begin moving, watching directional information on the Navigation Page or your progress on the Map Page.



Route Navigation



P R E L I M I N A R Y

UNIT OPERATION > ROUTES PAGE

Stopping Navigation


To stop navigation, highlight the **Stop Navigation** option on either the Navigation or Map page's Option Menu or select the **Stop** button on the Route Page.

Data Fields for the Route Page

When navigating a Route, the data displayed in the data fields on the Route Page may be customized to provide useful navigation information.

To select data field options:

1. Use the **Thumb Stick** to highlight a data field on the Route Page and then press **In** to display the data field options.
2. Use the **Thumb Stick** to highlight the desired option and press **In** to select that option for the selected data field.



Changing the Route Data Fields

Data field Options for Route Page

- Distance to Point
- ETA To Point
- ETE To Point
- Leg Course
- Leg Distance
- Leg Time
- Pointer
- Sunrise At Point
- Sunset At Point




Tracks Page

The Rino 530 draws an electronic bread crumb trail on the Map Page as you travel along. This bread crumb trail is the Track Log. The Track Log contains information about points along its path, including time, and position. The Rino 530 uses this information to allow you to navigate using the saved track. You may also save tracks from other Rino users as they communicate with you.

To open the Tracks page:

1. Access the Menu Page by using the on-screen menu button  or the **Page** button.
2. Select the **Tracks** icon and press the **Thumb Stick In**. The Tracks page opens.



Tracks Page

To save and use a Track:

1. Access the Tracks page from the Main Menu.
Press the on-screen **Off** button  to pause track logging. When track logging is active the **On** button appears to be recessed.
2. Highlight the **Save** on-screen button and then press the **Thumb Stick In** to display the track log **Save Back Through** list.
3. Use the **Thumb Stick** to select the time and date that you would like to save the track through.
4. Press the **Thumb Stick In** to save the track log and display the Track Page. The Track Page shows the track name (which can be renamed using the keyboard for data entry), the total distance of the track, track area (if available), a **Show on Map** option, and on-screen buttons for **Map**, **OK**, and **Tracback**.



P R E L I M I N A R Y

UNIT OPERATION > TRACKS PAGE

Using the TracBack Feature

The TracBack feature allows you to return along a traveled path (or another Rino user's path) without marking any waypoints. When you are ready to return to where you started, the Rino 530 takes you back by following the Track Log that you left behind. You can save a total of 20 tracks in the unit memory. The Track Log starts recording as soon as the unit gets a satellite location fix and the Track Log feature is turned on. When you no longer need a Track Log you can press the on-screen **Clear** button to remove it.

If you want to keep a record of a certain track log or use the TracBack feature, it is recommended that you clear the Track Log before you start traveling. The percentage of memory used by the current track log is displayed in a window at the top of the page. After the Track Log is Cleared, it displays zero percent.

When the display reaches 100%, the most recent track points start to overwrite the least recent if the default setting **Wrap When Full** remains selected on the track log setup. To avoid losing track points you want, save the Track Log when it approaches the 99% mark. The active track log stores up to 10,000 points.

The Saved Track Page displays the track and it can also be displayed on the Main Map Page as you navigate. You may save up to 20 tracks with 250 points per track in the unit. Saved Contact tracks count towards this total. Tracks are marked BEGIN and END.



To use the TracBack feature:

1. Highlight the **Tracback** button on the Tracks page and press the **Thumb Stick In**. The Tracback Menu options (**To Beginning** and **To End**) are displayed.
2. Highlight the desired option and press the **Thumb Stick In** to enable.
3. Use the Map Page or the Navigation Page to navigate the Track.

Setting up the Track Log

You can set the track recording interval to Distance, Time, or Automatic. You can set the Track display resolution to High, Medium, Low, and Lowest. You can also use the Option Menu to delete all saved tracks.

To use Track Log Setup options:

1. Highlight the Tracks Page **Option Menu** button  at the top of the page and press the **Thumb Stick In** to display the menu.
2. Highlight the **Tracks Log Setup** option and then press the **Thumb Stick In**.

You can check the **Wrap When Full** option by highlighting it and then pressing the **Thumb Stick In**. You can highlight the **Record Method** and **Interval** fields and press the **Thumb Stick In** to display their options. **Interval** options change to accommodate the **Record Method** choices.



P R E L I M I N A R Y

UNIT OPERATION > PROXIMITY PAGE

Proximity Page

The Proximity Page lets you define an alarm circle around a stored waypoint/contact position, and can be used to help you avoid dangerous areas or to alert you when you have strayed too far away from other Rino users. Up to ten waypoints may be listed, with a maximum alarm radius of 99.99 nautical or statute miles or kilometers. If entering a proximity alarm circle, a “Near Proximity Point <name>” message appears. If leaving a proximity alarm circle, a “Leaving Proximity Point <name>” message appears.

To access the Proximity Page:

1. Press the **Page** button or the **Menu** icon  to open the Main Menu.
2. In the Main Menu, scroll down and select **Proximity**.

To add a proximity point:

1. Use the **Thumb Stick** to highlight an empty space on the Proximity list and press the **Thumb Stick In** to display the Find ‘N Go screen.

Highlight an item from the list and press the **Thumb Stick In** to open the item.

2. From the Review Page, select **Use**. Press In again to begin entry of the proximity radius. Use the **Thumb Stick** to enter a distance and press In.

To clear one or all proximity point(s) from the list:

1. To clear a single alarm, use the **Thumb Stick** to highlight the proximity point to clear and press In. Choose **Remove** and press In.
2. To clear all proximity waypoints, highlight the **Option Menu**  and press In. Choose **Remove All** and press the **Thumb Stick In**.

To turn proximity alarms on or off:

Use the **Thumb Stick** to highlight **Proximity Alarms** and press In to place a check mark.




Satellite Page

The Satellite Page provides a picture of satellite signal tracking, tells you when the unit is ready for navigation, and shows your location coordinates.

To access the Satellite Page:


1. Press the **Page** button or the **Menu** icon  to open the Main Menu.
2. In the Main Menu, scroll down and select **Satellite**.

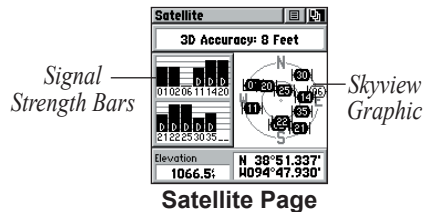

Sky View Graphic

The Sky View graphic represents a view looking up at the sky from your current location showing satellites and their assigned numbers. The outer ring represents

the horizon around you. The inner ring represents a view above you at a 45° angle from vertical. The center represents directly overhead. Signal Strength Bars for each satellite are shown to the left of the Sky View. Satellites and their signals appear as hollow shapes until a signal is received and then they appear darkened in. The stronger the signal, the taller the signal bar.

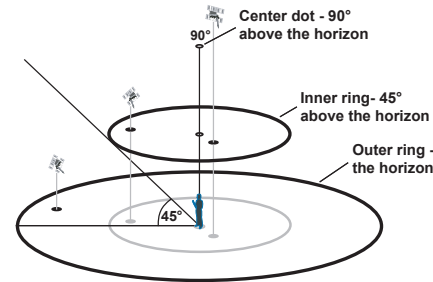




P R E L I M I N A R Y

UNIT OPERATION > SATELLITE PAGE

WAAS

The Wide Area Augmentation System (WAAS) capability produces a more accurate position fix. When enabled (GPS set to **Normal** and WAAS set to **Enabled** through the System Setup Page, also the interface must be set to something other than RTCM mode), this feature searches for WAAS satellites near your location and then receives data for correcting differentials in the GPS satellite signals. WAAS satellite numbers begin at number 33 or above and are displayed on the Satellite Page. When differential correction data has been received for GPS satellites (numbers 32 or below), a **D** displays in the signal bar beneath the skyview. It is helpful to orient the unit antenna toward the WAAS satellite shown in the skyview. To learn more about the WAAS System, refer to the Federal Aviation Administration Web site (<http://gps.faa.gov/>).

Because the Rino 530 relies on satellite signals to provide you with navigational guidance, the unit's view of the sky determines how fast you achieve navigational status. GPS signals do not travel through heavy objects or people: For best results, keep the unit in clear view of the sky.



Satellite Page using WAAS

Satellite Strength

At least three satellite signals are needed to determine your location, otherwise the unit displays a “Poor Satellite Reception” message with four options:

Use with GPS Off—Select this option if you want GPS off.



New Location—Select this option if you have moved more than 600 hundred miles (from where you last used the unit).

Restart Search—Select this option if today is not (date provided).


Continue Acquiring—Select this option if no other option applies. The unit will attempt to gather GPS signals.

Satellite Page Options

Use With GPS Off—Use this option when you are indoors, your view of the sky is obstructed, or you want to save battery power. You can enter data, create routes, etc., but cannot navigate in this mode.

Track Up/North Up—You can orient the satellite skyview by selecting ‘Track Up’ (your direction of travel) or ‘North Up’ (the satellite skyview oriented to the north).

New Location—If you are more than 600 miles (from where you last used the unit), select the **New Location** and then the **Use Map** options to approximate your location. This gives the unit reference information and speeds satellite acquisition.



Satellite Page Option Menu



P R E L I M I N A R Y

UNIT OPERATION > SATELLITE PAGE

To select the Use With GPS Off option:

1. Use the **Thumb Stick** to highlight the **Option Menu** button  at the top of the page and then press it In.
2. Use the **Thumb Stick** to highlight the **Use With GPS Off** option and then press it In.

The Rino 530 stops tracking satellites and should not be used for navigation. However, the next time you turn the unit on, it returns to Normal GPS operation.

To select Track Up or North Up:

1. Use the **Thumb Stick** to highlight the **Option Menu** button  at the top of the page and then press it In to display the Option Menu.
2. Highlight either the **Track Up** or **North Up** option (depending on which is currently in use), and press the **Thumb Stick** In to activate.

To enter a new location:

1. Use the **Thumb Stick** to highlight the **Option Menu** button  at the top of the page and then press it In.

2. Highlight **New Location** and press the **Thumb Stick** In to display choices of **Auto** or **Use Map**.

If you choose **Automatic** the Rino 530 determines your new location automatically.

If you choose **Use Map** a map page displays with instructions stating, "Point to your approximate location and press ENTER". Use the **Thumb Stick** to move the map pointer to your location on the map and press the **Thumb Stick** In.



Setup Pages

The Setup Pages allow you to customize the Rino 530 to your personal preferences. You can choose time settings, units of measure, display backlighting and contrast settings, heading measurement, interface options and system operating mode.

By highlighting the icons on the Setup Menu and then pressing the **Thumb Stick In**, you can display the Setup Page for each of the menu items.

To access the Setup Menu


1. Press the **Page** button or the **Menu** icon  to open the Main Menu.
2. In the Main Menu, scroll down and select **Setup**. There are then several more icons to choose from in the Setup Menu.

Time Setup Page

You can set the time to match your location or for a projected location anywhere in the world.

To access the Time Setup page:

1. Press the **Page** button or the **Menu** icon  to open the Main Menu.
2. In the Main Menu, scroll down and select **Setup**.
3. Select the **Time** icon to open the Time Setup page.



Time Setup Page

Time Format—Allows you to choose from 12-hour (like a standard clock with 12-hour AM and PM cycles) or 24-hour time format (a 24- hour cycle, also called Military Time).



P R E L I M I N A R Y

UNIT OPERATION > SETUP PAGES

Time Zone—Can be set to one of the eight US Time Zones, or 24 International Time Zones (nearest city or geographical region). Select **Other** so you can enter the UTC Time Offset.

Daylight Savings Time—Can be turned On or Off or set to Automatic.

To set the time:

1. Use the **Page** button to access the Main Menu.
2. Use the **Thumb Stick** to highlight the **Setup** Icon. Press the **Thumb Stick In** to display the Setup Menu.
3. Use the **Thumb Stick** to highlight the **Time** Icon. Press the **Thumb Stick In** to display the Time Page.
4. Use the **Thumb Stick** to highlight the **Time Zone** field. Press the **Thumb Stick In** to display the time zone list.
5. Highlight a time zone from the list and then press the **Thumb Stick In**.


6. If you choose **Other**, you must enter a UTC offset value.
7. The correct time displays at the bottom of the page.

Units Setup Page

The Units features are best used by individuals with a working knowledge of map grids and datums. To learn more about these subjects, visit the National Imagery and Mapping Agency at <http://www.nima.mil> or inquire at your local library.

To access the Units Setup page:

1. Press the **Page** button or the Menu icon  to open the Main Menu.
2. In the Main Menu, scroll down and select **Setup**.
3. Select the **Units** icon to open the Units Setup page.



Units Setup Page



Position Format—Allows you to choose from different grid formats. The default position format, ‘hddd°mm.mmm’ displays the latitude and longitude in degrees and minutes and is most commonly used. The following additional formats are available:

hddd.ddddd°—latitude/longitude in decimal degrees;
hddd°mm.mmm’—latitude/longitude in decimal numbers; hddd°mm’ss.s”—latitude/longitude in degrees, minutes, seconds; British Grid; Dutch Grid; EOY Hungarian Grid; Finnish Grid; German Grid; Icelandic Grid; India Zones; Irish Grids; Loran TD; Maidenhead; MGRS; New Zealand; QNG Grid; RT90; South African Grid; Swedish Grid; Swiss Grid; Taiwan Grid; US National Grid; UTM/UpS - Universal Transverse Mercator / Universal Polar Stereographic grids; W Malayan RSO; and User UTM Grid.

LORAN TD Format

When creating new waypoints using LORAN TD coordinates, you must set the correct LORAN chain number and secondary stations in the Setup TD field

before storing the waypoint. After the waypoint is stored in unit memory, it always references the LORAN chain number and secondary stations currently selected in the Setup TD field. If you enter a different LORAN chain number, change the secondary stations, or offsets in the Setup TD field, the active waypoint information reflects those changes. Because the unit does not rely on the LORAN signal for navigation, it can reference a different GRI chain and/or secondary stations and still navigate to the location stored in memory.

To adjust the Loran TD settings, select **Loran TD** as the Position Format to open the Loran TD setup window. To change the settings of any fields, highlight the field, press the **Thumb Stick In**. When done, highlight **Save** and press In.

For more information on Loran TDs, you may download Garmin’s *Loran TD Position Format Handbook* from the Garmin web site at <http://www.garmin.com/support/userManual.jsp>.



P R E L I M I N A R Y

UNIT OPERATION > SETUP PAGES

Map Datum—Offers a selection of nearly all map datums in common use. Every map is based on a map datum (a reference model of the earth's shape) and is usually listed in the title block of the map. If you are comparing GPS coordinates to a paper map, chart, or other reference, the map datum in this field must match the horizontal map datum used to generate the map or other reference. The default datum is WGS-84 (World Geodetic Survey 1984) and should only be changed when using maps or charts specifying a different datum. If a map does specify a datum, use the options list to find datums applicable to the region of the map, selecting the one that provides the best positioning at a known point. If necessary, you also may choose the **User** datum for custom designed grids.



NOTE: The **User** datum is based on a WGS-84-Local datum and is an advanced feature for unlisted or custom datums. To learn more, check your local library or the Internet for educational materials on datums and coordinate systems.

Distance/Speed—Choose from three units of measure to display your rate of travel.

Elevation/Vertical Speed—Choose from two units of measure to record your elevation and vertical speed.

Pressure—Choose from millibars or Inches to measure the pressure.

Display Setup Page

You can adjust the amount of time that the backlighting feature stays on and adjust the screen contrast.


Backlighting Timeout—Choose from **Stays On** or delays of 15 seconds, 30 seconds, one minute, or two minutes before timing out.



Contrast Adjustment—Can be adjusted from light to dark using the slider adjacent to the contrast bar.

To access the Display Setup page:

1. Press the **Page** button or the **Menu** icon  to open the Main Menu.
2. In the Main Menu, scroll down and select **Setup**.
3. Select the **Display** icon to open the Display Setup page.



Display Setup Page

To set the backlighting timeout:

1. Highlight the **Backlight Timeout** field and then press the **Thumb Stick** In.
2. Highlight the desired option and then press the **Thumb Stick** In.

To adjust the contrast:


1. Highlight the contrast slider and then press the **Thumb Stick** In.
2. Move the **Thumb Stick** up or down to move the slider to set the contrast.

Heading Setup Page

You can select the type of heading displays, the types of North References, or enter the magnetic variation.

To access the Heading Setup page:

1. Press the **Page** button or the **Menu** icon  to open the Main Menu.
2. In the Main Menu, scroll down and select **Setup**.
3. Select the **Heading** icon to open the Heading Setup page.



Heading Setup Page



P R E L I M I N A R Y

UNIT OPERATION > SETUP PAGES

Display—Allows you to choose from Cardinal Letters, Degrees or Mils.

North Reference—You can choose from True, Magnetic, Grid or User options. If 'User' is chosen, you must correct for the Magnetic Variation. The Electronic or GPS compass uses the North Reference setting to create a bearing.

Switch to Compass Heading when Below—Enter the desired speed for the Rino 530 to switch from using GPS to using the compass for guidance.

For more than...—Enter a time limit to switch to the compass. When you travel at the speed entered above for the time entered here, the Rino 530 switches from GPS to the compass.

To select either option:


1. Highlight the field and then press the **Thumb Stick In** to display the options.
2. Highlight the option and press the **Thumb Stick In** to activate.

Interface Setup Page

The Interface Settings Page allows you to choose from different input/output serial data formats. This feature is used when connecting to external NMEA devices, a DGPS beacon receiver, a personal computer, etc. See the *Appendix* for using the Rino 530 with MapSource.

To access the Interface Setup page:

1. Press the **Page** button or the **Menu** icon  to open the Main Menu.
2. In the Main Menu, scroll down and select **Setup**.
3. Select the **Interface** icon to open the Interface Setup page.



Interface Setup Page



The available interface formats are:

Garmin—The proprietary format used to exchange waypoint, track, and map data with a PC. Use this setting for transferring data when using a MapSource product.

Garmin DGPS—Allows DGPS input using a Garmin beacon receiver and a standard RTCM SC-104 and DGPS tuning.

NMEA In/NMEA Out—Supports the output of standard NMEA 0183 version 3.0 data. Use this for real-time plotting with MapSource or 3rd party programs.

Text Out—Allows ASCII text output of location and velocity information without input capabilities.

RTCM IN—Allows DGPS input using a standard RTCM SC-104 format without output capabilities.

RTCM In/NMEA Out—Allows DGPS input using a standard RTCM SC-104 format and supports the output of standard NMEA 0183 version 3.0 data.

RTCM In/Text Out—Allows DGPS input using a


standard RTCM SC-104 format and simple ASCII text output of location and velocity information.

None—Provides no interfacing capabilities.

If **Garmin DGPS** or **RTCM In/NMEA Out** format is selected, additional fields are provided to control a Garmin differential beacon receiver (e.g. GBR 23) directly from your unit. Tuning is automatic with Scan or you can enter the beacon frequency and bit rate when you select **User** from the Beacon list to manually tune the receiver. Refer to the beacon receiver instructions.

To select a serial data format:

1. Highlight the **Serial Data Format** field and then press the **Thumb Stick In**.
2. Highlight an option and then press the **Thumb Stick In** to activate it.



Interface Setup Page

Rino® 530 Owner's Manual



P R E L I M I N A R Y

UNIT OPERATION > SETUP PAGES


System Setup Page

The System Setup Page allows you to change GPS operation modes, use the WAAS capabilities, turn the Message Beep and compass on or off, and set the altimeter calibration settings to automatic or manual. See the “Appendix” for WAAS capability information.

To access the System Setup page:

1. Press the **Page** button or the **Menu** icon  to open the Main Menu.
2. In the Main Menu, scroll down and select **Setup**.
3. Select the **System** icon to open the System Setup page.

The Option Menu  allows you restore defaults or display the current version of unit operating software and the Unit I.D. Number. Software updates and instructions for downloading are available from the Garmin Web site (www.garmin.com).



System Setup Page

Choose one of the four GPS options other than Normal to significantly save battery power. The Battery Saver mode reduces the rate of satellite signal position updating and the GPS Off option stops satellite signal reception altogether. The Demo Mode simulates navigation.



Calendar

This feature provides you with a monthly calendar with programmable reference notes. You can display one monthly calendar at a time and add reference notes using the data entry keypad. Days that are shaded have notes added. You can create reference notes for multiple months and for months in years yet to come. You can record 100 notes with up to 18 characters each.



Calendar Page

To access the Calendar:

1. Press the **Page** button or the **Menu** icon  to open the Main Menu.
2. In the Main Menu, scroll down and select **Calendar**.

To change the month and year:

Highlight the left or right arrows on either side of the date and press the **Thumb Stick** In. The left arrow shows past months/years and the right arrow shows future months/years.

To use the current month and year

Choose **Set To Current Date** from the Option Menu .

To create a reference note for a selected date:

1. Use the **Thumb Stick** to highlight the day of the month and then press In to display the pop-up Menu (containing New Note, View Sun & Moon, and View Hunt & Fish).
2. Highlight and select **New Note** to begin entering text from the keyboard.



P R E L I M I N A R Y

UNIT OPERATION > CALENDAR

To edit or delete a note:

1. To edit or delete a note previously created, highlight the date and press the **Thumb Stick In**.
2. Select **Edit Note**, or **Delete Note**, from the pop-up menu. To complete the deletion of the note, press the **Thumb Stick In** when **Yes** is highlighted in the pop-up window.
3. To edit the note, change the desired characters using the keyboard as shown in the image to the right. Press **OK** when you are finished editing the note.



Editing a note

To delete notes by week:

1. Choose **Delete Notes...** from the Option Menu .
2. From the **Older Than...** window, choose the desired option and press the **Thumb Stick In**.

To view information for a date:

1. In the calendar, select the desired date using the **Thumb Stick**.
2. Review the note in the note window below the calendar.
3. Press the **Thumb Stick In** to display the pop-up menu.
4. Select **View Sun & Moon** to view the Sun & Moon Page for that date. Select **View Hunt & Fish** to view the Hunt & Fish Page for that date.



Alarm Clock


This feature provides an alarm for the system clock. Enter a time in the time field and turn the alarm on and off from the control field menu. Remember to enter alarm times in the same time format (UTC or local) you are using for your system. The unit must be on for the alarm clock to work.

To access the Alarm Clock:

1. Press the **Page** button or the **Menu** icon  to open the Main Menu.
2. In the Main Menu, scroll down and select **Alarm Clock**.

To set an alarm clock time:

1. Use the **Thumb Stick** to highlight the time field and then press **In** to display the keyboard.
2. Use the **Thumb Stick** to enter the desired time, choose **OK** and press **In**.



Alarm Clock Page

To turn the alarm clock on/off:

1. Use the **Thumb Stick** to highlight the **Alarm Mode** field and then press **In** to display the options.
2. Choose **On** or **Off** and press the **Thumb Stick In**.

When the alarm sounds, a brief tone is heard (unless Message Beep is Off under System Setup) and “Alarm Clock” appears on the screen. Press the **Thumb Stick In** to acknowledge the alarm.



P R E L I M I N A R Y


UNIT OPERATION > CALCULATOR

Calculator

This feature provides you with all the basic functions of both of standard or scientific calculator. You can perform most calculations identified by the function symbols along the sides of the keypad and can save the results temporarily in the memory. The memory is cleared either manually or when you turn off the Rino 530.

To access the Calculator:

1. Press the **Page** button or the **Menu** icon  to open the Main Menu.
2. In the Main Menu, scroll down and select **Calculator**.



Calculator Page

To change calculator options:

1. Highlight the page **Option Menu**  and press the **Thumb Stick In** to display the Scientific/Standard and Radian/Degrees options.
2. Highlight the option you want to change and then press the **Thumb Stick In**.
3. Use the **Thumb Stick** to move about the calculator, enter numbers, and perform calculations.



Stopwatch

This feature allows you to use the unit as a stopwatch, including using it as a lap timer. You may also have the unit record the lap time based on distance. For example, if you set the lap distance to one mile, the unit records the time it takes you to travel one mile.

To access the Stopwatch:

1. Press the **Page** button or the **Menu** icon  to open the Main Menu.
2. In the Main Menu, scroll down and select the **Stopwatch** icon.

To use the Stopwatch:

1. Use the **Thumb Stick** to highlight the **Start** field and then press In. You may also press the **V (Volume)** button to start the stopwatch.
2. Use the **Thumb Stick** to highlight the **Stop** field and then press In. You may also press the **V (Volume)** button to stop the stopwatch.

3. To mark a lap, use the **Thumb Stick** to highlight the **Lap** field and then press In, with the stopwatch running. You may also press the **Z (Zoom)** button to capture the lap time.
4. Reset the stopwatch when the timer is stopped. Use the **Thumb Stick** to highlight the **Reset** field and then press In. You may also press the **Z (Zoom)** button to reset the times.



Stopwatch Page

Stopwatch Lap Options

You can set the stopwatch to **Lap by Distance** so that each time a certain distance has been travelled, the stopwatch automatically marks a lap. You can enter a specific lap distance by selecting **Set Lap Distance**. To return to manually marking each lap, open the **Option Menu**  and select the **Lap by Button Press** option.



P R E L I M I N A R Y

UNIT OPERATION > SUN & MOON

Sun & Moon

This feature provides you with a graphic display of both sun and moon positioning for a certain date, time and location with times for sunrise, sunset, moonrise, and moonset.

To access the Sun & Moon Page:


1. Press the **Page** button or the **Menu** icon  to open the Main Menu.
2. In the Main Menu, scroll down and select the **Sun & Moon** icon.

To set the date and time:

1. For the Date and Current Time, highlight each field, then press the **Thumb Stick** In to begin data entry of individual characters.
2. To display the current date and time, highlight the page **Option Menu**  and press the **Thumb Stick** In to display **Use Current Time** and then press the **Thumb Stick** In.

To set the location:

1. Highlight the **Location** field and then press the **Thumb Stick** to display the **New Location** options list.
2. Highlight the option desired and then press In on the **Thumb Stick** to activate. If you choose **Current Location** the field values displayed on the page displays your location. If you choose **Use Map**, a map page displays. Use the map pointer to identify the desired location and then press In on the **Thumb Stick**. If you choose **Use Find 'N Go Menu** follow instructions in the Find 'N Go section.



Sun & Moon Page



Hunt & Fish

This feature provides you with a listing of best times for hunting and fishing for a chosen location and date.

To access the Hunt & Fish Page:

1. Press the **Page** button or the **Menu** icon  to open the Main Menu.
2. In the Main Menu, scroll down and select the **Hunt & Fish** icon.

To set the date:

1. Highlight the date field and then press In on the **Thumb Stick** to begin data entry of individual characters.
2. To display the current date, highlight the page Option Menu and press the **Thumb Stick** In to display the **Use Current Date** option and then press the **Thumb Stick** In.

Hunt & Fish	
Date	10-DEC-03
Location	
Current Location	
Prediction	Good Day
Best Times	
12:01h	02:01h
12:26h	02:26h
Good Times	
06:12h	07:12h
06:37h	07:37h

Hunt & Fish Page

To set the location:

1. Highlight the Location field and then press In on the **Thumb Stick** to display the **New Location** options list.
2. Highlight the option desired and then press In on the **Thumb Stick** to activate. If you choose **Current Location** the field values displayed on the page reflect the times at your current location.
3. If you choose **Use Map**, a map page displays. Use the map pointer to identify the desired location and then press In on the **Thumb Stick**. If you choose **Use Find 'N Go Menu** follow instructions for using the Find 'N Go Menu.



NOTE: The times displayed are the recognized best and good times for hunting and fishing. Be certain that they are not in conflict with state and local game laws, which may vary from location to location. It is your responsibility to know and abide by these laws.




P R E L I M I N A R Y

UNIT OPERATION > AREA CALCULATOR

Area Calculator

This feature provides you an area calculation as you move about a location or view a saved track. The area calculation displays in acres, hectares, and square feet, square yards, square meters, square kilometers, and square miles.



Area Calculation Page

To access the Area Calculator:

1. Press the **Page** button or the **Menu** icon  to open the Main Menu.
2. In the Main Menu, scroll down and select the **Area Calculator** icon.

To calculate the area:

1. Be sure the Rino 530 has a GPS fix.
2. Press **Start** when you are ready to begin.
2. Begin walking or traveling the perimeter (edge) of the area you want to measure.
3. Use the **Thumb Stick** to stop the calculation when you have traveled the desired distance.
4. Use the **Thumb Stick** to store the area as a saved track.


To review the area of a saved track:

1. On the Tracks page, highlight a Saved Track.
2. Press the **Thumb Stick** In to see a map with the area shown in a data field at the bottom.



Games

The Games Page includes Memory Race, Waypoint Bomber, Clothesline, Assimilation and Beast Hunt. Highlight the appropriate icon and then press the **Thumb Stick** In to play the desired game. Brief instructions are displayed when you start each game. All players must be on the same channel/squelch code to play.




Games Menu

Memory Race

Be the first to clear the board by matching all of the two symbols sets together. Each symbol is in a square (you can adjust the size) that you need to walk or travel to. Once your position appears in a square, highlight **Open** at the bottom of the screen and press the **Thumb Stick** In.

Play by yourself or race against others. Press **Page** to quit at any time.



Memory Race

To adjust the Grid Size or Square Size:

1. Highlight the **Grid Size** or **Square Size** field and press In on the **Thumb Stick**.
2. Choose the desired size and press In.
3. Highlight **Start** and press In to begin the game.



P R E L I M I N A R Y

UNIT OPERATION > GAMES

Waypoint Bomber

In this game, it is good to stay on the move! Two or more players attempt to “bomb” each other. Move your cursor around on the map page using your **Thumb Stick**. When you think an opponent is close to your cursor, drop a bomb. The receiving radio shows an “Incoming” message. If the receiving radio is within the blast circle (about 45 feet), it displays a message that you have been hit. You must wait 30 seconds between shots to reload. Either have a timed game with the winner being the one with the least amount of hits on their radio, or play until someone gets a specified number of hits (that person loses).



HINT: Mark stationary objects such as trees and poles, and drop a bomb when an opposing player is near that object! Adjust the rules to your liking!

- To fire at the cursor location, press the **Thumb Stick In**.
- To fire at your current location, press the **Talk** button.
- Press **Call** to view the scoreboard at any time.
- Press **Page** to quit the game at any time.



Waypoint Bomber



Clothesline

Team members select the same user symbol and then attempt to “hit” or “clothesline” other players by pressing the **Talk** button when an opposing team member is between them. You may also mark a point and assign it a symbol to be used as a stationary team member. Wait 30 seconds between attempts. Press **Call** to view the score and **Page** to quit the game.


Assimilation

Think of this as a high-tech game of tag. Team members select the same user symbol and then attempt to assimilate others into their team by getting within 30 feet of them and pressing the **Talk** button. Press **Call** to show the score and **Page** to quit the game. You can set a time limit so the largest team wins, or play until the other team is completely assimilated. Set your own rules and enjoy!

Beast Hunt

The objective is to find and kill the beast with an arrow before it incinerates you or you fall into one of several

pits while navigating a maze of platforms. You can be transported by slides that curve or move diagonally. When you think you know where the beast is press the **Thumb Stick In** to initiate aiming when you are in an adjacent spot. With the **Thumb Stick**, point the arrow in the direction where you think the beast is and press the **Thumb Stick In** to fire. When you lose a game, the layout of hazards, slides, warning platforms, and the location of the beast is shown. A scoreboard keeps track of your wins and losses. Press **Page** anytime during the game for further instructions, to turn the sound On/Off, or to quit.



Beast Hunt



P R E L I M I N A R Y

APPENDIX > WHAT IS FRS?

What is FRS?

FRS, or Family Radio Service, is a UHF radio frequency band allocated by the FCC for general public use. The operating frequency ranges from 462.5625 to 467.7125 MHz, with a maximum transmitting power of one half watt. FRS radios are small and lightweight, making them ideally suited for outdoor activities. FRS radios typically feature a half watt of transmit power. You can expect your FRS radio to offer reliable operation at a one-mile range. If the area between you and another FRS operator is free of obstructions, operation up to two miles can be achieved. FRS radios broadcast on one of 14 channels, each with a specific frequency within the FRS band.

The use of FRS radios does not require a license. FRS was intended for use by families and small groups as an inexpensive means of two-way voice communication. FRS is intended for use throughout the United States, its territories and possessions. It may also be used in Canada. FRS is not approved outside of these areas and

may interfere with local government communication frequencies (fire, police, etc.).

FRS Features

More sophisticated FRS radios also include call functions, squelch codes, channel scan features, and voice scramble capabilities. Call functions allow you to push a Call button on the radio to alert other radios set on the same channel. This feature generates a call tone and is handy in a noisy environment where the tone is easier to initially identify than plain speech.

Squelch codes allow you to selectively block out other FRS users that are not part of your group. They will still be talking with others in their own group, but you will not hear them on your radio. They may or may not hear you and members of your group on their own radios. Squelch codes act as a filter, blocking your FRS radio from hearing other unwanted FRS users. Remember though, these are public-use frequencies and everyone has a right to talk or listen in.



Channel scan allows your FRS radio to scan all FRS frequencies for signals. After scanning briefly to see what channels other users are on, simply set your FRS radios to an unused channel and enjoy less interference. For greater privacy, some FRS radios have a voice scramble feature. This feature causes your message to sound garbled to other FRS users that are not part of your group. However, it does not guarantee your conversations will be 100 percent private and secure. Other casual FRS users will not hear your messages, but users with similar radios or more technically-oriented users can still monitor your conversations.

FRS Limitations

If you are operating in an urban environment or in varying terrain, some features (such as canyons or mountains) act as obstructions limiting the maximum reception range of your FRS radio. The UHF FRS frequencies are “line of sight”, meaning that the signals do not follow the surface of the earth, but instead radiate in a straight line from the transmitting antenna. If there

is an obstruction between the transmitting FRS radio and the receiving FRS radio, the signal will not be received. Smaller obstructions, such as trees, cars and even crowds of people cause some loss of signal, resulting in reduced maximum range.

GMRS

The use of a GMRS (General Mobile Radio Service) radio requires an FCC license. No license is required in Canada to operate on GMRS channels. The operating frequency of GMRS ranges from 462.550 to 462.725 MHz. GMRS radios can use repeater channels (15R–22R) and repeater towers to extend the range of the operation. A repeater tower simultaneously receives GMRS signals on a 467 MHz frequency and then rebroadcasts the signal on a 462 MHz frequency. Refer to the “Frequency Charts” for a complete list of each channel’s frequency. GMRS repeater channels are not approved for use by the Canadian government, so they are disabled on Rino 530 units sold in Canada.



P R E L I M I N A R Y

APPENDIX > SPECIFICATIONS

Specifications

Physical

Case: Fully-gasketed, high-impact plastic alloy, waterproof to IPX7 standards (waterproof to one meter for 30 minutes)

Size: 4.5" H x 2.3" W x 1.6" D; 7" H with antenna (11.4 x 5.8 x 4.1; 17.8 cm)

Weight: Approx. 7.6 ounces (236 g) with batteries

Temperature Range:
-4° to 158° F (-20° to 70° C) (operating range)

Display: 1.4" H x 1.4" W (3.6 cm x 3.6 cm)
60 x 160 pixels, high-contrast LCD

Performance

GPS Receiver:

WAAS Enabled, Differential-ready,
12 parallel channel

Acquisition time:

Approx. 15 seconds (warm start)
Approx. 45 seconds (EZinit/cold start)
Approx. 5 minutes (First Time/AutoLocate®)

Update Rate: 1/second, continuous

GPS Accuracy: <15 meters (49 ft) RMS, 95% typical¹

DGPS (USGC) Accuracy: 3–5 meters (10–16 ft), 95% typical with DGPS corrections²

DGPS (WAAS) Accuracy: <3 meters (10 ft), 95% typical with DGPS corrections²

Velocity Accuracy: 0.05 meter/sec steady state

Dynamics: Performs to specifications to 6 g's

Interfaces: NMEA 0183, RTCM 104 (for DGPS corrections) and RS-232 for PC interface

Antenna: Quad-helix



P R E L I M I N A R Y

APPENDIX > SPECIFICATIONS

Radio

Channels: 1–14 FRS,
15–22 GMRS (requires FCC license in the U.S.)
1–7 Weather Radio channels

Squelch Codes: 1–38

Range: Up to 2 miles on FRS; up to 5 miles on GMRS

Radio Output Power:

FRS 0.5 W; GMRS 2.0 W or 5.0 W
Alkaline battery pack, 2.0 W

Power

Input: Rechargeable 2-cell lithium-ion battery pack

Battery Life:

GPS only: up to 41 hours;
FRS only: up to 20 hours;
FRS, GPS, and sensors: up to 14 hours³

Specifications are subject to change without notice.

¹Subject to accuracy degradation to 100m 2DRMS under the U.S. DoD-imposed Selective Availability program.

²With optional Garmin Differential Beacon Receiver Input (such as Garmin GBR 23).

³5, 5, 90 Duty Cycle - 5% receive with audio unmuted, 5% transmit and 90% standby (receive with audio muted)



P R E L I M I N A R Y

APPENDIX > ACCESSORIES

Accessories

To obtain accessories, see your local dealer or visit the Garmin web site at www.garmin.com.

12-volt Adapter Cable—Provides unit power from an automobile cigarette lighter.

2.5 to 3.5 mm Jack Adapter—Allows you to use 3rd party headsets with your Rino unit.

Alkaline Battery Pack—can replace the included lithium-ion battery pack.

Bash Guard Kit—Helps protect the Rino's edges against hard shocks. Includes 2 bash guards, quick-release neck lanyard, and belt clip.

Carrying Case—Protects the Rino and permits use while in the case.

Earbud with PTT (Push To Talk) Mic—Earbud and a clip-on mic with PTT button.

Flexible Ear Receiver—Comfortable earpiece for better hearing ability of your Rino.

Headset with VOX Boom Mic—Hands-free at its best! Utilize the Rino's VOX (Voice Operated Transmission) feature with this headset and voice activated boom mic.

Instructional Video—For getting accustomed to your Rino basic operations quickly.

MapSource Map Data CD-ROMs—An excellent tool for creating waypoints and routes on your PC and downloading them to your Rino.

PC Data Cable and 12-volt Adapter—Allows transfer of waypoints and routes from a PC to the Rino and provides unit power from an automobile cigarette lighter.

Rail/Handlebar Mount—Allows you to mount your Rino on most rails or handlebars.

Suction Cup Mount—Allows you to mount your Rino on most smooth surfaces or windshields.



P R E L I M I N A R Y

APPENDIX > TRANSFERRING MAPSOURCE DATA

Transferring MapSource Data

If you have purchased a Garmin MapSource CD-ROM mapping program you may want to transfer detailed map data before beginning use, to provide your unit with maximum Find features and mapping capability. The Rino 530 accepts up to 24 MB of map data from most MapSource products. It is not possible to transfer 3rd party maps into Garmin products.

You cannot view multiple types of MapSource data in the same location at the same time (one replaces the other if there is an overlap). When you leave a MetroGuide area for example and enter the area of a topographic map, the display changes to contour lines. The same is true when moving from a topo map to a MetroGuide map. The BlueChart maps are at the top of the hierarchy and will replace any other map information. Here is the list of the hierarchy for your reference:

1. BlueChart
2. MetroGuide
3. Fishing Hot Spots

4. Points of Interest
5. U.S. Waterways & Lights
6. U.S. Topo
7. Roads and Recreation
8. WorldMap

Map data transfer requires the use of a PC, a Garmin MapSource CD-ROM, and the PC Interface Cable with RS-232 serial port connector supplied with this unit. Follow detailed instructions for data transfer in the *MapSource User's Manual*.



P R E L I M I N A R Y

APPENDIX ▸ TRANSFERRING MAPSOURCE DATA

To setup for data transfer:

1. Remove the Power/Data Port cover on the back of the unit by lifting up on the protective cover on the back of the unit.
2. Connect the serial port connection on the cable to the PC serial port.
3. Connect the remaining cable connector to the back of the Rino 530 by orienting the slot on the connector with indexing bar on the back of the unit. Then, slide the connector in place. Be sure that the cable is pushed all the way into the back of the unit.
4. Turn on the Rino 530 and follow instructions for map data transfer provided in the MapSource User's Manual. See also the Interface Setup Page section for unit interface settings.



GPS Troubleshooting Guide

Symptom	Probable Cause	Remedy
Unit does not turn on.	Batteries are exhausted.	Replace batteries.
Unit does not turn on, even with new batteries.	Batteries may be installed backwards.	Reinstall batteries.
	You are pressing and releasing the Power button.	You must press and hold the Power button for 2 seconds.
The unit turns on, then turns off.	Batteries may be nearly exhausted.	Replace batteries.
It takes more than ten minutes to get a location fix	The unit's view of satellites is obstructed.	Move to a location with a clear view of the sky.
Cannot access a WAAS system satellite after 2 to 5 minutes.	Your view of the satellite is obstructed or you are located too far from satellites currently in service for the Americas	Move to a location with a clear view and point the unit antenna in the direction of the satellite.
	System GPS operation is set to something other than Normal and/or interface setting is set for RTCM.	Set system GPS to Normal and interface to other than RTCM. Or simply turn off WAAS.
Cannot obtain a differential position from WAAS	You have not collected enough information from the WAAS satellite.	Wait 10–20 minutes for the initial collection, then 1–2 minutes afterwards.
Cannot access Point of Interest, Street, or Intersection Find Lists.	MetroGuide map data is not activated.	Access the Map Setup Map option and activate the check box.
Cannot view a track being laid down on the map page when traveling.	The Track Log feature is turned off.	Access the Tracks Page, highlight the On button and press the Thumb Stick In.
Cannot see the panning arrow on the Map Page easily.	There is too much map clutter or the scale is such that map features are too densely displayed.	Use the Map Page Setup Page to reduce map clutter or change the map scale.
Cannot exit a menu or page by moving the Thumb Stick to the Left.	Some menus and pages have an “X” (Exit) on-screen button in the upper right corner.	Highlight the on-screen button and then press the Thumb Stick In.



P R E L I M I N A R Y

APPENDIX > RADIO TROUBLESHOOTING GUIDE

Radio Troubleshooting Guide

Symbol	Probable Cause	Remedy
Radio not transmitting	Talk key may not be fully depressed	Press and hold Talk key until done talking.
	FRS/GMRS Radio feature may not be on.	Turn radio on.
Messages not being received by others.	Incorrect channel/Squelch Code setting	Make sure other radios are on the same channel and Squelch Code.
	Out of range or obstructions.	Decrease distance between radios.
Limited talk range.	Natural or man-made obstructions can decrease range.	Decrease distance between radios or obtain a better line of sight between radios.
You can hear others, but they cannot hear you, or you see an incoming transmission, but nothing is heard.	You are on the same channel, but a different Squelch Code.	If you are using Squelch Code zero (0), you will hear all transmissions on that channel. Use the same Squelch Code (1-38) as the other party or use Scan to find what Squelch Code they are on.
Message garbled.	Scramble option is enabled.	Both radios need to have this feature set the same.
Too many unwanted conversations being heard.	Too many users on channel or Squelch Code is set to zero.	Switch to a different channel and/or Squelch Code other than zero (1-38).
Interference or static.	Radios too far apart or too close. Obstructions in radio line of sight.	Keep radios at least 3 feet apart. Obtain a better line of sight between radios.
	Interference from other electronics.	Shut off other devices or move to a different area.
Cannot transmit location.	Could be one of a few things: Your view of the satellite is obstructed and a GPS fix is not available. Send Location is off. 30 seconds have not elapsed since last location transmission. GPS is set to off.	Move to a location with a clear view of the sky. Enable Send Location . Wait 30 seconds between location transmission. Enable GPS.
None of the keys except Talk will work.	Keylock is enabled.	Hold Page for 5 seconds to release keylock.





FRS Frequency Chart

Channel #	Transmit Frequency (MHz)	Receive Frequency (MHz)	Channel Description
1	462.5625	462.5625	FRS 1, GMRS Interstitial 1
2	462.5875	462.5875	FRS 2, GMRS Interstitial 2
3	462.6125	462.6125	FRS 3, GMRS Interstitial 3
4	462.6375	462.6375	FRS 4, GMRS Interstitial 4
5	462.6625	462.6625	FRS 5, GMRS Interstitial 5
6	462.6875	462.6875	FRS 6, GMRS Interstitial 6
7	462.7125	462.7125	FRS 7, GMRS Interstitial 7
8	467.5625	467.5625	FRS 8
9	467.5875	467.5875	FRS 9
10	467.6125	467.6125	FRS 10
11	467.6375	467.6375	FRS 11
12	467.6625	467.6625	FRS 12
13	467.6875	467.6875	FRS 13
14	467.7125	467.7125	FRS 14



NOTE: If you plan to purchase FRS radios from third party manufacturers be aware that there are CTCSS differences in some radios. Some of the tones on one radio may not be available on other radios. Charts showing the different Squelch Codes and manufacturers can be located on the Internet.

Weather Radio Frequency Chart

Channel #	Transmit Frequency (MHz)	Receive Frequency (MHz)	Channel Description
WX 1	N/A	162.550	NOAA 1 (Weather Radio)
WX 2	N/A	162.400	NOAA 2 (Weather Radio)
WX 3	N/A	162.475	NOAA 3 (Weather Radio)
WX 4	N/A	162.425	NOAA 4 (Weather Radio)
WX 5	N/A	162.450	NOAA 5 (Weather Radio)
WX 6	N/A	162.500	NOAA 6 (Weather Radio)
WX 7	N/A	162.525	NOAA 7 (Weather Radio)



NOTE: For use in countries outside of the U.S. or Canada, please check with that government for any restrictions on FRS or GMRS use.



P R E L I M I N A R Y

APPENDIX > FREQUENCY CHARTS

GMRS Frequency Chart

Channel #	Transmit Frequency (MHz)	Receive Frequency (MHz)	Channel Description
15	462.5500	462.5500	GMRS Primary 1
16	462.5750	462.5750	GMRS Primary 2
17	462.6000	462.6000	GMRS Primary 3
18	462.6250	462.6250	GMRS Primary 4
19	462.6500	462.6500	GMRS Primary 5
20	462.6750	462.6750	GMRS Primary 6
21	462.7000	462.7000	GMRS Primary 7
22	462.7250	462.7250	GMRS Primary 8
15R	467.5500	462.5500	GMRS Repeater 1
16R	467.5750	462.5750	GMRS Repeater 2
17R	467.6000	462.6000	GMRS Repeater 3
18R	467.6250	462.6250	GMRS Repeater 4
19R	467.6500	462.6500	GMRS Repeater 5
20R	467.6750	462.6750	GMRS Repeater 6
21R	467.7000	462.7000	GMRS Repeater 7
22R	467.7250	462.7250	GMRS Repeater 8



P R E L I M I N A R Y

APPENDIX > DATA FIELD DEFINITIONS

Data Field Definitions

The following data field options are available on the Map, Navigation, Altimeter, and Trip Computer Pages.

Ambient Pressure—The uncalibrated current pressure. (Altimeter Page Only.)

Average Ascent—The average vertical distance of ascents. (Altimeter Page Only.)

Average Descent—The average vertical distance of descents. (Altimeter Page Only.)

Barometer—The Calibrated current pressure. (Altimeter Page Only.)

Bearing—The direction from your current location to a destination.

Course—The direction from your starting location to a destination.

Current Destination—The next waypoint on your route.

Current Distance—The remaining distance to your next waypoint.

Current ETA—The estimated time of day you will arrive at your next waypoint.

Current ETE—The estimated time needed to arrive at the next waypoint on your route.

Elevation—The altitude (height) above or below sea level.

Final Destination—The last waypoint on your route.

Final Distance—The remaining distance to your final destination.

Final ETA—The estimated time of day you will reach your final destination.

Final ETE—The estimated time needed to reach your final destination.

GPS Accuracy—The estimated accuracy of the GPS signal.

Heading—Your moving direction.

Location (lat/lon)—Your current GPS position. (Trip Computer Page Only.)

Location (selected)—The lat/lon of point defined on map. (Trip Computer Page Only.)

Maximum Ascent—The maximum ascent rate in feet per minute. (Altimeter Page Only.)

Maximum Descent—The maximum descent rate in feet per minute. (Altimeter Page Only.)



P R E L I M I N A R Y

APPENDIX > DATA FIELD DEFINITIONS

Maximum Elevation—The highest elevation reached. (Altimeter Page Only.)

Maximum Speed—The maximum speed the unit has moved.

Minimum Elevation—The lowest elevation reached. (Altimeter Page Only.)

Moving Avg. Speed—Average speed of the unit while moving.

Odometer—A running tally of distance travelled, based upon the distance between second-by-second position readings.

Off Course—The distance left or right you are from the original course (path of travel).

Overall Avg. Speed—Your average speed.

Pointer—Indicates the direction to the next destination.

Speed—Display rate of travel in miles per hour, kilometers per hour, or nautical miles per hour.

Sunrise—The time at which the sun rises on this day.

Sunset—The time at which the sun sets on this day.

Time of Day—The time for the selected time zone.

To Course—The compass direction you must go in order to get back to the original course.

Trip Odometer—A running tally of distance travelled since last reset.

Trip Time—Moving—A running tally of movement time elapsed since last reset.

Trip Time—Stopped—A running tally of stopped time elapsed since last reset.

Trip Time—Total—A running tally of all time since last reset.

Total Ascent—The total distance ascended. (Altimeter Page Only.)

Total Descent—The total distance descended. (Altimeter Page Only.)

Turn—The angle difference (in degrees) between the bearing to your destination and your current line of travel. L means turn Left. R means turn Right.

Velocity Made Good—The speed at which you are closing on a destination along a desired course.

Vertical Speed—Your rate of altitude gain/loss over time.



P R E L I M I N A R Y

APPENDIX > INTERFACE INFORMATION

Interface Information

Interface formats are selected in the Setup Interface Page. See also the “MapSource Setup” section of this Appendix for information on using the Rino 530 with MapSource. The input/output lines on your Rino 530 unit are RS-232 compatible, allowing easy interface to a wide range of external devices, including PC’s, differential beacon receivers, marine autopilots, and /or a second GPS receiver.

The NMEA 0183 version 3.0 interface format is supported by the Rino 530 and enables the unit to drive up to three NMEA devices.

NMEA 0183 Version 3.0 Approved Sentences:

GPGGA, GPGLL, GPGSA, GPGSV, GPRMB, GPRMC, GPRTE, GPVTG, GPWPL, GPBOD


GARMIN Proprietary Sentences:

PGRME (estimated error), PGRMM (datum string), PGRMZ (altitude), PSLIB (beacon receiver control)

DGPS (Differential GPS) corrections are accepted in RTCM-SC-104 version 2.0 format through the ‘Data IN’ line. The Garmin GBR 21 and GBR 23 are the recommended beacon receivers for use with the Rino 530. Other beacon receivers with the correct RTCM format may be used, but may not correctly display status or allow tuning control from the GPS unit.

The Rino 530 may be hard-wired to a serial connector using a Data Only Cable. Refer to the wiring diagram and the Rino 530 unit data connection illustrated below.

The PC Interface Cable provided with this unit allows you to connect your Rino 530 to a PC-compatible computer’s serial port.

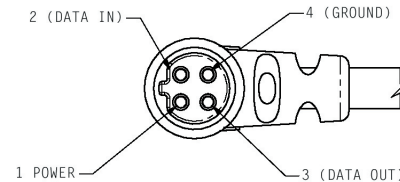



P R E L I M I N A R Y

APPENDIX > FCC COMPLIANCE INFORMATION

FCC Compliance Information

The Rino 530 complies with Part 15 of the FCC regulations and with Canadian RSS-210 and ICES-003 for Class B digital devices. Operation of this device is subject to the following conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment generates, uses, and can radiate radio frequency energy and may cause harmful interference to radio communications if not installed and used in accordance with the instructions. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet that is on a different circuit than the receiver's circuit.
- Consult the dealer or an experienced radio/TV technician for help.

The Rino 530 does not contain any user-serviceable parts. Repairs should only be made by an authorized Garmin service center. Unauthorized repairs or modifications could result in permanent damage to the equipment and void your warranty and your authority to operate this device.





P R E L I M I N A R Y

APPENDIX > FCC LICENSING INFORMATION

FCC Licensing Information

The Rino 530 two-way radio operates on General Mobile Radio Service (GMRS) frequencies regulated by the Federal Communications Commission (FCC) in the United States. Operation on the GMRS frequencies is subject to additional rules as specified in 47 CFR Part 95.

In order to transmit on GMRS frequencies, you are required to obtain a license from the FCC. An individual 18 years of age or older, who is not a representative of a foreign government, is eligible to apply for a GMRS license. To apply for a GMRS license, you will need FCC Form 605 (605 Main Form and Schedule F) and FCC Form 159. You can download the application forms from the FCC web site at <http://www.fcc.gov/Forms/>. You can also request them through the FCC forms hotline at 1-800-418-FORM (1-800-418-3676). You can file Form 605 online at <http://wireless.fcc.gov/uls/>. A filing fee, which may change from time to time, is associated with this application.

For information on fees, see the FCC fee information web page at <http://wireless.fcc.gov/feesforms/index.html>. General information may be found at <http://wireless.fcc.gov/services/personal/generalmobile/>.

For questions concerning the license application, contact the FCC at 1-888-Call-FCC (1-888-225-5322)

No license is required to operate on GMRS channels in Canada. However, GMRS repeater channels are not approved for use by the Canadian government.

For use in countries outside of the U.S. and Canada, please check with that government for any restrictions of FRS or GMRS use.



P R E L I M I N A R Y

APPENDIX > LIMITED WARRANTY

Limited Warranty

This Garmin product is warranted to be free from defects in materials or workmanship for one year from the date of purchase. Within this period, Garmin will at its sole option repair or replace any components that fail in normal use. Such repairs or replacement will be made at no charge to the customer for parts or labor, provided that the customer shall be responsible for any transportation cost. This warranty does not cover failures due to abuse, misuse, accident or unauthorized alteration or repairs.

THE WARRANTIES AND REMEDIES CONTAINED HEREIN ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES EXPRESS OR IMPLIED OR STATUTORY, INCLUDING ANY LIABILITY ARISING UNDER ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, STATUTORY OR OTHERWISE. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, WHICH MAY VARY FROM STATE TO STATE.

IN NO EVENT SHALL GARMIN BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES, WHETHER RESULTING FROM THE USE, MISUSE, OR INABILITY TO USE THIS PRODUCT OR FROM DEFECTS IN THE PRODUCT. Some states do not allow the exclusion of incidental or consequential damages, so the above limitations may not apply to you.

Garmin retains the exclusive right to repair or replace the unit or software or offer a full refund of the purchase price at its sole discretion. SUCH REMEDY SHALL BE YOUR SOLE AND EXCLUSIVE REMEDY FOR ANY BREACH OF WARRANTY.

To obtain warranty service, contact your local Garmin authorized dealer or call Garmin Product Support for shipping instructions and an RMA tracking number. The unit should be securely packed with the tracking number clearly written on the outside of the package. The unit should then be sent, freight charges prepaid, to any Garmin warranty service station. A copy of the original



sales receipt is required as the proof of purchase for warranty repairs.

Garmin International, Inc.
1200 E 151st Street, Olathe, Kansas 66062 U.S.A.
Tel. 913/397.8200
Fax. 913/397.8282

Garmin (Europe) Ltd.
Unit 5, The Quadrangle, Abbey Park Industrial Estate,
Romsey, SO51 9DL U.K.
Tel. 44/0870.8501241
Fax 44/0870.8501251

Online Auction Purchases: Products sold through online auctions are not eligible for rebates or other special offers from Garmin. Online auction confirmations are not accepted for warranty verification. To obtain warranty service, an original or copy of the sales receipt from the original retailer is required. Garmin will not replace missing components from any package purchased through an online auction.

International Purchases: A separate warranty is provided by international distributors for units purchased outside the United States. This warranty is provided by the local in-country distributor and this distributor provides local service for your unit. Distributor warranties are only valid in the area of intended distribution. Units purchased in the United States or Canada must be returned to the Garmin service center in the United Kingdom, the United States, Canada, or Taiwan for service.

The Garmin Rino 530 has no user-serviceable parts. Should you ever encounter a problem with your unit, please take it to an authorized Garmin dealer for repairs.

The Rino 530 is fastened shut with screws. Any attempt to open the case to change or modify the unit in any way will void your warranty and may result in permanent damage to the equipment.



P R E L I M I N A R Y

APPENDIX > SOFTWARE LICENSE AGREEMENT

Software License Agreement

BY USING THE RINO 530, YOU AGREE TO BE BOUND BY THE TERMS AND CONDITIONS OF THE FOLLOWING SOFTWARE LICENSE AGREEMENT. PLEASE READ THIS AGREEMENT CAREFULLY.

Garmin grants you a limited license to use the software embedded in this device (the “Software”) in binary executable form in the normal operation of the product. Title, ownership rights, and intellectual property rights in and to the Software remain in Garmin.

You acknowledge that the Software is the property of Garmin and is protected under the United States of America copyright laws and international copyright treaties. You further acknowledge that the structure, organization, and code of the Software are valuable trade secrets of Garmin and that the Software in source code form remains a valuable trade secret of Garmin. You agree not to decompile, disassemble, modify, reverse assemble, reverse engineer, or reduce to human readable form the Software or any part thereof or create any derivative works based on the Software. You agree not to export or re-export the Software to any country in violation of the export control laws of the United States of America.

Product Registration

Help us better support you by completing our online registration today! Have the serial number of your Rino 530 handy and connect to our Web site (<http://www.garmin.com>). Look for the Product Registration link on our Home page.

Use this area to record the serial number (8-digit number located in the battery compartment) in case your Rino 530 is lost, stolen, or needs service. Be sure to keep your original sales receipt in a safe place or attach a photocopy inside the manual.

Serial Number: _ _ _ _ _

Contact Garmin

If you should encounter any difficulty while using your Rino 530, or if you have any questions, in the U.S.A. contact Garmin Product Support by phone: 913/397.8200 or 800/800.1020, Monday–Friday, 8 AM–5 PM Central Time; or by e-mail at sales@garmin.com. In Europe, contact Garmin (Europe) Ltd. at 44/0870.8501241.



P R E L I M I N A R Y

APPENDIX > WARNINGS AND CAUTIONS

Warnings and Cautions

The GPS system is operated by the United States government, which is solely responsible for its accuracy and maintenance. The system is subject to changes which could affect the accuracy and performance of all GPS equipment. Although the Garmin Rino 530 is a precision electronic NAVigation AID (NAVAID), any NAVAID can be misused or misinterpreted and, therefore, become unsafe.

The electronic chart is an aid to navigation and is designed to facilitate the use of authorized government charts, not replace them. Only official government charts and notices to mariners contain all information needed for safe navigation—and, as always, the user is responsible for their prudent use.

Use the Rino 530 at your own risk. To reduce the risk of unsafe operation, carefully review and understand all aspects of this *Owner's Manual*. When in actual use, carefully compare indications from the Rino 530 to all available navigation sources, including the information from other NAVAIDS, visual sightings, charts, etc. For safety, always resolve any discrepancies before continuing navigation.

WARNING: The Rino 530 contains a lithium-ion rechargeable battery pack. The battery used in this device may present a risk of fire or chemical burn if mistreated. Do not recharge out of the unit, disassemble, heat above 140°F (60°C), or incinerate.

WARNING: If the original battery must be removed for replacement, dispose of the used battery properly. Contact your local waste disposal department for information on proper disposal of lithium-ion batteries. Keep used batteries away from children. Do not disassemble or dispose of batteries in fire.

MAP DATA INFORMATION: One of the goals of Garmin is to provide customers with the most complete and accurate cartography that is available to us at a reasonable cost. We use a combination of governmental and private data sources, which we identify (as required) in product literature and copyright messages displayed to the consumer. Virtually all data sources contain inaccurate or incomplete data to some degree. This is particularly true outside the United States, where complete and accurate digital data is either not available or prohibitively expensive.

CAUTION: IT IS THE USER'S RESPONSIBILITY TO USE THIS PRODUCT PRUDENTLY. THIS PRODUCT IS INTENDED TO BE USED ONLY AS A NAVIGATIONAL AID AND MUST NOT BE USED FOR ANY PURPOSE REQUIRING PRECISE MEASUREMENT OF DIRECTION, DISTANCE, LOCATION, OR TOPOGRAPHY.



P R E L I M I N A R Y

APPENDIX > WARNINGS AND CAUTIONS

IMPORTANT: READ THIS INFORMATION BEFORE USING YOUR RINO:

Exposure to Radio Frequency Signals—Your wireless handheld radio is a low power radio transmitter and receiver. When it is on, it receives and also sends out radio frequency (RF) signals. In August 1996, The Federal Communications Commissions (FCC) adopted RF exposure guidelines with safety levels for handheld wireless radios. Those guidelines are consistent with safety standards previously set by both U.S. and international standards bodies: American National Standards Institute (ANSI) IEEE. C95.1-1992; National Council on Radiation Protection and Measurements (NCRP) Report 86; International Commission on Non-Ionizing Radiation Protection (ICNIRP) 1996. Those standards were based on comprehensive and periodic evaluations of the relevant scientific literature. For example, over 130 scientists, engineers, and physicians from universities, government health agencies, and industry reviewed the available body of research to develop the ANSI Standard (C95.1). The design of your radio complies with the FCC guidelines (and those standards).

For body-worn and face-held operation, this radio demonstrates compliance and meets the FCC RF exposure guidelines for uncontrolled exposure (general population) when used with approved accessories supplied with or designed for this product. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

Antenna Care—Use only the supplied antenna. Unauthorized antennas, modifications, or attachments could damage the radio and may violate FCC regulations. **Do not use any radio that has a damaged antenna, because if it comes into contact with your skin, a minor burn can result.**

Electronic Devices—Most modern electronic equipment is shielded from RF signals. However, certain equipment may not be shielded against the RF signals from your wireless radio.

Pacemakers—The Health Industry Manufacturers Association recommends that a minimum separation of six inches (6”) be maintained between a handheld wireless radio and a pacemaker to avoid potential interference with the pacemaker. These recommendations are consistent with the independent research by and recommendations of Wireless Technology Research. Persons with pacemakers should ALWAYS keep the radio more than six inches from their pacemaker when the radio is turned on, should not carry the radio in a breast pocket, should use the ear opposite



P R E L I M I N A R Y

APPENDIX > WARNINGS AND CAUTIONS

the pacemaker to minimize the potential for interference, and should turn the radio off immediately if you have any reason to suspect that interference is taking place.

Hearing Aids—Some digital wireless radios may interfere with some hearing aids. In the event of such interference, you may want to consult your hearing aid manufacturer to discuss alternatives.

Other Medical Devices—If you use any other personal medical device, consult the manufacturer of your device to determine if it is adequately shielded from external RF energy. Your physician may be able to assist you in obtaining this information.

Turn your radio OFF in health care facilities when any regulations posted in these areas instruct you to do so. Hospitals or health care facilities may be using equipment that could be sensitive to external RF energy.

Vehicles—RF signals may affect improperly installed or inadequately shielded electronic systems in motor vehicles. Check with the manufacturer or its representative regarding your vehicle. You should also consult the manufacturer of any equipment that has been added to your vehicle.

Posted Facilities—Turn your radio OFF in any facility where posted notices so require.

Commercial Aircraft—Many commercial airlines prohibit the use of FRS radios on board. Switch OFF your radio before boarding an aircraft or check the airline rules.

Blasting Areas—To avoid interfering with blasting operations, turn your radio OFF when in a “blasting area” or in areas posted: “Turn off two-way radio.” Obey all signs and instructions.

Potentially Explosive Atmospheres—Turn your radio OFF and do not remove your battery when you are in any area with a potentially explosive atmosphere. Obey all signs and instructions. Sparks from your battery in such areas could cause an explosion or fire resulting in bodily injury or even death.

Areas with a potentially explosive atmosphere are often, but not always clearly marked. They include fueling areas such as gasoline stations, below deck on boats, fuel or chemical transfer or storage facilities; vehicles using liquefied petroleum gas (such as propane or butane); areas where the air contains chemicals or particles, such as grain, dust, or metal powders; and any other area where you would normally be advised to turn off your vehicle engine.



P R E L I M I N A R Y

INDEX

A

Accessories 103
Accuracy 101
Acquisition time 101
Address 59
Add to Route 52, 53, 55,
56, 58
Alarm 75, 90
Alarm Clock 90
Altimeter Page 37
Altitude 37
Arriving at Destination 64
Arrow 27
Ascent 37, 110
Auto Zoom 30

B

Barometric Pressure 38,
39, 41
Basemap 1
Battery icon 6
Battery Life 102
Battery Type, Changing 87
Bearing 32
Bearing Pointer 32, 34, 64
BlueChart 104

Rino® 530 Owner's Manual

Bread Crumb Trail 72
Broken Signals 18
Buttons Locked 46

C

Calendar 88
Calibrate
 Altimeter 41
 Compass 34, 36
Call 99
Call Tone 16
CDI 33
Channel 10
City 55
Compass 87
 Calibrate 35
Contact 20, 54
Course Deviation Indica-
tor 33
Course Pointer 33, 34
CTCSS 10, 108
Current location 47

D

Data Fields 28, 34, 40,
41, 71

Definitions 110
For Route Page 71
Data Transfer 105
Defaults 4, 26, 34, 38, 42,
67, 87
Delete Waypoint 50
Descent 37, 110
DGPS 112
Display Mode 30

E

Editing
 Routes 66
 Waypoints 49
Electronic Compass 36
Elevation 37, 38, 39
 Cchanges 39
 Changes 37
 Plot 39
Exit 56

F

Family Radio Service 1, 99
FCC 99
 License 100
Finding

Address 59
By name 51, 52
City 55
Contact 54
Exit 56
Intersection 59, 60
Point of Interest 57
Find 'N Go 50, 51, 64, 66
FRS 1, 7, 10, 99, 108

G

Games 96
Garmin sentences 112
General Mobile Radio
 Service 1
GMRS 1, 7, 10, 15, 99
Goto 52, 53, 54, 55, 56, 64
GPS
 On/Off 18, 77
 Status 18
GRI chain 82

H

Headset 15
Hunt & Fish 52, 53, 55, 56,
58, 94

121



P R E L I M I N A R Y

INDEX

I

Informational Picture 18
Initialize 8
Interface formats 112
Intersection 59, 60

K

Keylock 5, 46

L

Lap 92
Last Found Place 61
License Agreement 117
Line of sight 100
Lock

Buttons/Keys 5, 46
Direction 35
on Road 30

LORAN TD Format 82

M

Main Display Pages 4
Main Menu 45
MapSource 1, 24, 59, 65, 86
Setup 104
Map Data 31, 59, 104

122

Map Detail 30
Map Page 24
Options 26
Pan Map 26
Restore Defaults 26
Setup Map 26, 29
Map Pointer 27
Mark Waypoint 47
Measure Distance 26, 31
Message Tone 16, 63, 87
Microphone 15
Monitor Channels 12
Mr. Mark Waypoint 18
My ID 8

N

Name 8
Navigate 33, 70
Navigation Page 32
Options 34
Restore Defaults 34
Near Map Pointer 55
New Contact 20
New Location 78, 79
NMEA 0183 112
North Heading 30

North Up 30, 78, 79
Note 63, 88

O

Operating the Rino 5
Options Menu 5
Orientation 30

P

Page Sequence Setup 45
Pan Map 26, 27
PC 104, 112
PC Interface Cable 104
Peer-to-Peer 14, 20
PIT 15
Points of Interest 57, 58, 104
Poll location 54
Pressure 39
Changes 37
Plot 38, 39
View Plot 39
Project Waypoint 35, 49, 52, 53, 54, 55, 56, 58
Proximity alarms 75

R

Radio 17
Radio Page 7
Informational Picture 18
Setup Radio 14
Weather Radio 17
Re-Sight 35
Recently Found Places 61
Reference note 88
Restore Defaults 26, 38, 42
Reverse Route 66
Review Route 67
Ring Tone 16
Roger Tone 16
Routes 65
Copy 67
Create 65
Data Fields 71
Delete 67
Edit 66
Navigate 70
Remove waypoints 66
Restore defaults 67
Reverse 66
Review 67

Rino® 530 Owner's Manual



P R E L I M I N A R Y

INDEX

S

Satellite Page 24, 76
GPS Off 77
New Location 78
North Up 78
Options 78
Track Up 78
Scanlist 12, 13, 16
Scan Channels 12, 100
Scan Codes 12
Scramble 14, 100
Setup
Map 26, 29
Page 80
Radio 14
Scanlist 16
TD field 82
Time Page 80
Tones 16
Shortcut Menu 5, 46
Show Data Fields 34
Sight 'N Go 34, 35
Signal Strength 76
Sky View 76
Specifications 101
Squelch codes 10, 99

Rino® 530 Owner's Manual

Status Bar 6
Status Bar Icons 6
Stop Navigation 26, 34
Sun & Moon 52, 53, 55,
56, 58
Symbol 8, 9

T

Text Setup 31
Thumb Stick 2, 5
Time Page 80
Tones 16, 90
Call 16
Ring 16
Roger 16
Setup 16
Topo map 104
TracBack 73
Track
Log 72
Page 72
Points 30
Setup 30
Track Up 30, 78, 79
Transmit Location 20, 23
Trip Computer Page 42

Two-way Radio 1, 99, 114

U

UHF 99
Units Page 81
Unlock Buttons 5, 46

V

Vibrate 16
Voice Operated Transmis-
sion 14
Voice Scramble 100
VOX 14

W

WAAS 77, 87
Waterproof 1, 101
Waypoint 47, 48
Create 47, 48
Delete 50
Edit 49
Move 50
Project 49
Weather Alert 17, 62
Weather Radio 17, 62
Radio Page 62
Shortcut Menu Access 62

Z

Zoom 25, 30
Ranges 38, 39
Altimeter Page 38

123







**For the latest free software updates (excluding map data) throughout the life of your
Garmin products, visit the Garmin web site at www.garmin.com.**



© Copyright 2005 Garmin Ltd. or its subsidiaries

Garmin International, Inc.
1200 East 151st Street, Olathe, Kansas 66062, U.S.A.

Garmin (Europe) Ltd.
Unit 5, The Quadrangle, Abbey Park Industrial Estate, Romsey, SO51 9DL, U.K.

Garmin Corporation
No. 68, Jangshu 2nd Road, Shijr, Taipei County, Taiwan

www.garmin.com

Part Number 190-00NNN-00 Rev. A