TEST RESULTS (Cont):	

Middle Channel

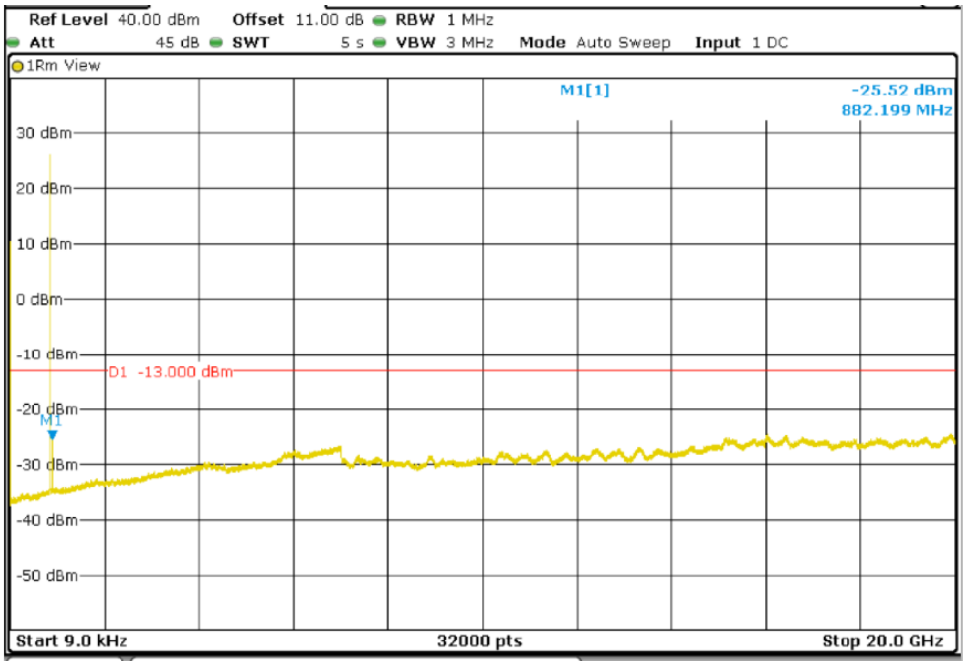

Highest Channel

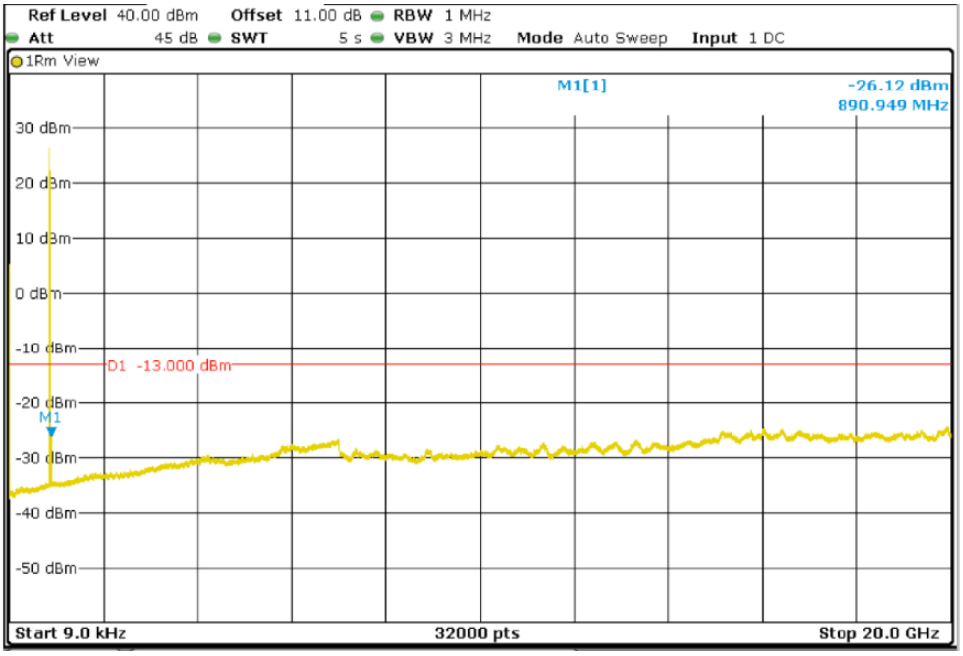

TEST A.6: SPURIOUS EMISSIONS AT ANTENNA TERMINALS AT BLOCK EDGES

LIMITS:	Product standard:	FCC Part 22 / IC RSS-132
	Test standard:	FCC §2.1051 and 22.917 / RSS- Clause 5.5.

LIMITS

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. P in watts.

At Po transmitting power of 2 watts (33 dBm), the specified minimum attenuation becomes 43+10log (Po). and the level in dBm relative to Po becomes:

Po (dBm) – [43 + 10 log (Po in watts)] = -13 dBm

TEST SETUP

The EUT RF output connector was connected to a spectrum analyzer and to the Universal Radio Communication Tester R&S CMW500 (selecting maximum transmission power of the EUT and different modes of modulation) using a 50-ohm attenuator and a power splitter.

The reading of the spectrum analyzer is corrected with the attenuation loss of connection between output terminal of EUT and input of the spectrum analyzer.

For LTE mode the configuration of modulation which is the worst case for conducted power was used.

As indicated in FCC part 22, in the 1 MHz bands immediately outside and adjacent to the licensee's frequency block or band, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

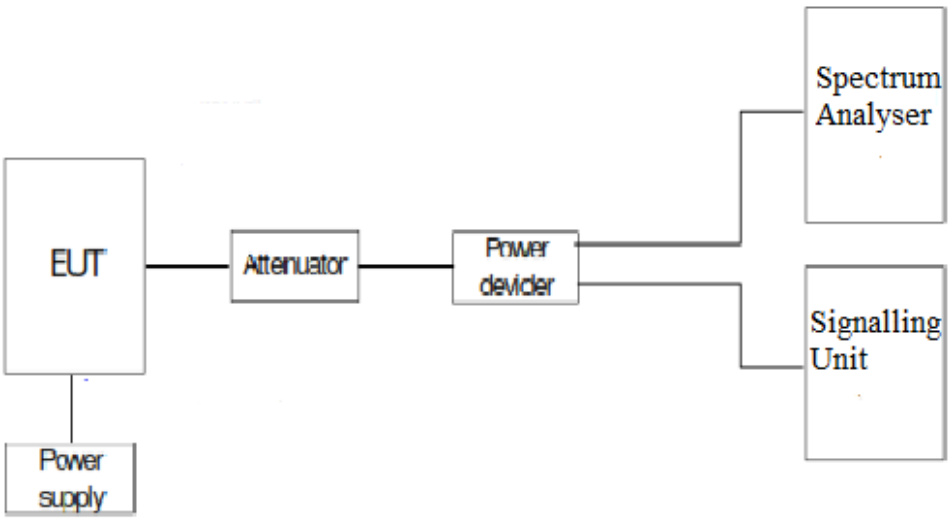

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01
TEST RESULTS:	PASS

LTE QPSK MODULATION	RB=1 Offset =0 BW = 1.4 MHz	RB=1 Offset =0 BW = 3 MHz	RB=1. Offset =0 BW = 5 MHz	RB=1 Offset =0 BW = 10 MHz
Maximum measured level at lowest Block Edge at antenna port (dBm)	-18.06	-18.35	-19.52	-17.39

LTE QPSK MODULATION	RB=6 Offset =0 BW = 1.4 MHz	RB=15 Offset =0 BW = 3 MHz	RB=25 Offset =0 BW = 5 MHz	RB=50 Offset =0 BW = 10 MHz
Maximum measured level at lowest Block Edge at antenna port (dBm)	-17.4	-16.9	-16.94	-17.62

LTE QPSK MODULATION	RB=1 Offset =5 BW = 1.4 MHz	RB=1 Offset =14 BW = 3 MHz	RB=1 Offset =24 BW = 5 MHz	RB=1 Offset =49 BW = 10 MHz
Maximum measured level at Highest Block Edge at antenna port (dBm)	-23.99	-22.14	-21.8	-23.69

LTE QPSK MODULATION	RB=6 Offset =0 BW = 1.4 MHz	RB=15 Offset =0 BW = 3 MHz	RB=25 Offset =0 BW = 5 MHz	RB=50 Offset =0 BW = 10 MHz
Maximum measured level at Highest Block Edge at antenna port (dBm)	-25.26	-23.06	-21.79	-23.3

TEST RESULTS (Cont):	

LTE QPSK MODULATION. RB = 1. Offset = 0. BW = 1.4 MHz

Lowest Channel

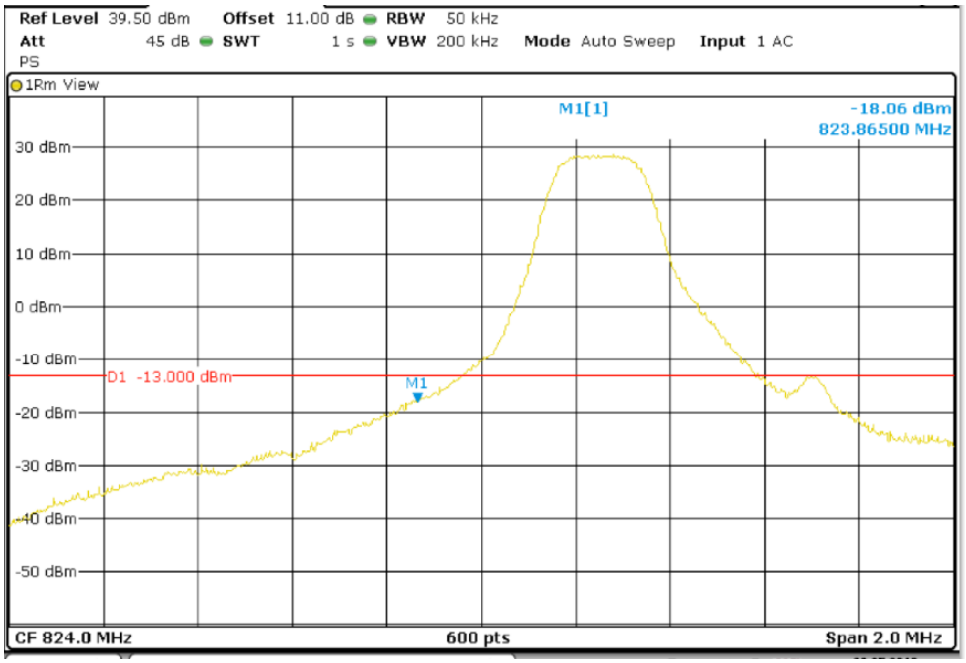

Highest Channel

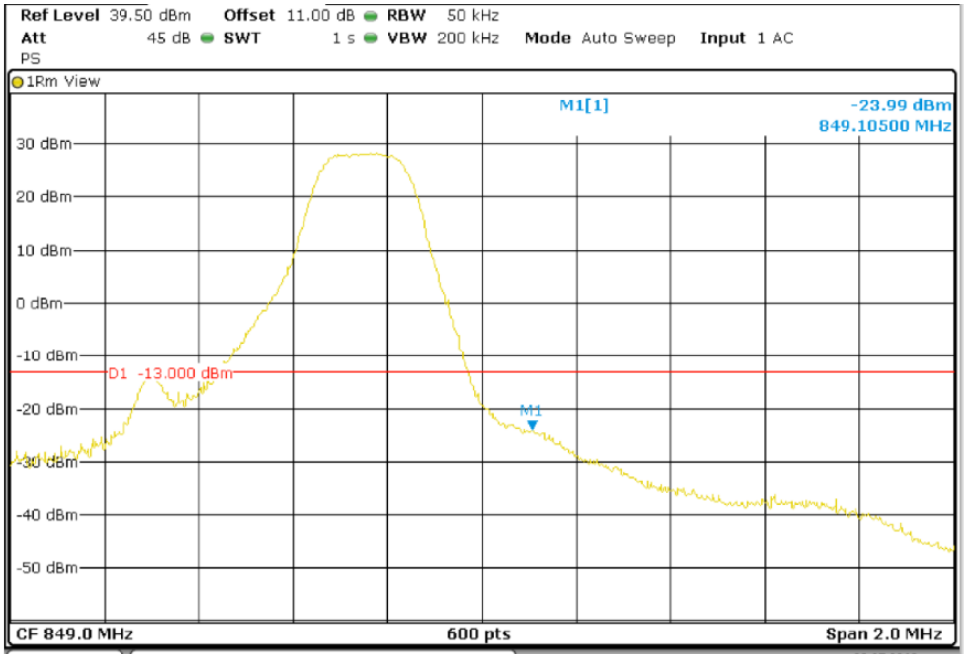

TEST RESULTS (Cont):	

LTE QPSK MODULATION. RB = 6. Offset = 0. BW = 1.4 MHz

Lowest Channel

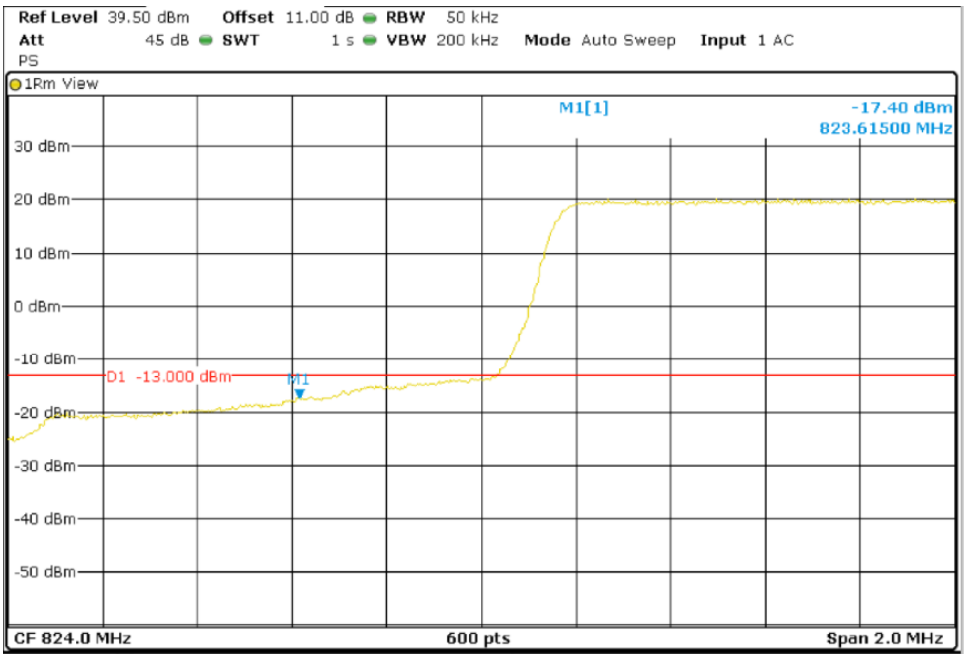

Highest Channel

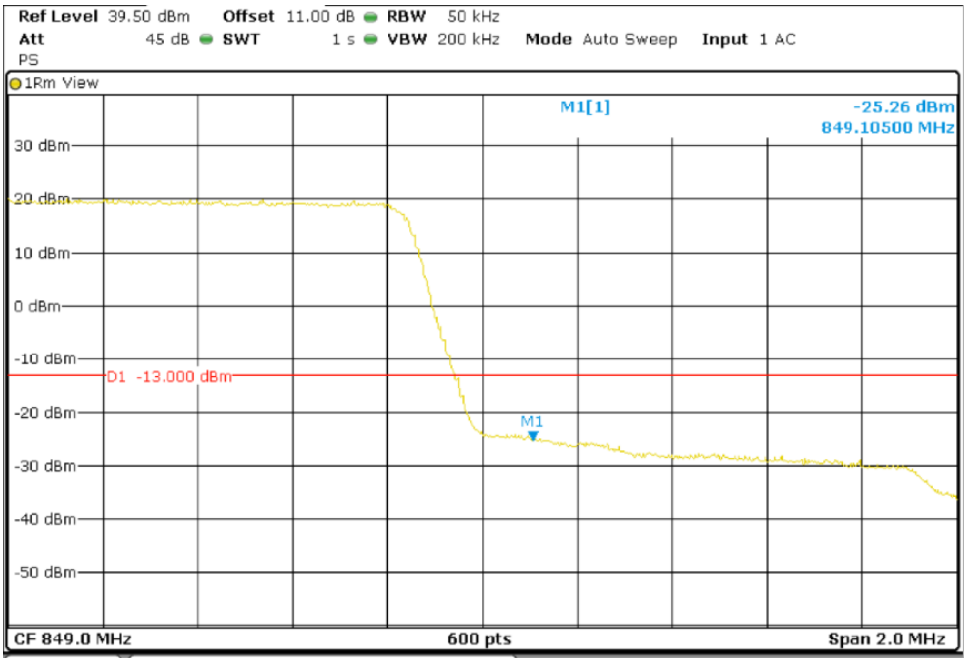

TEST RESULTS (Cont):	

LTE QPSK MODULATION. RB = 1. Offset = 0. BW = 3 MHz

Lowest Channel

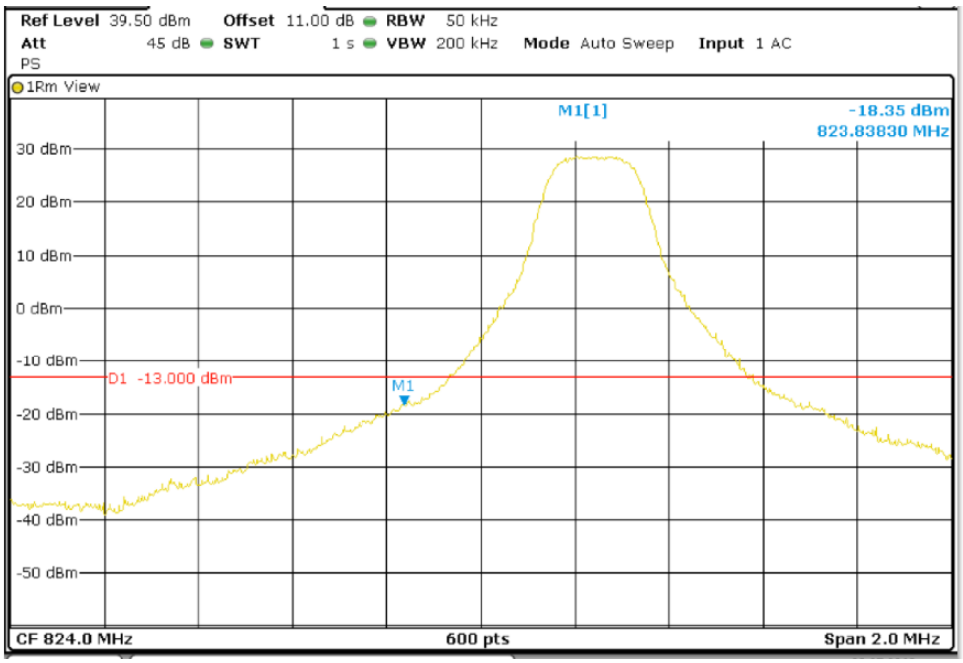

Highest Channel

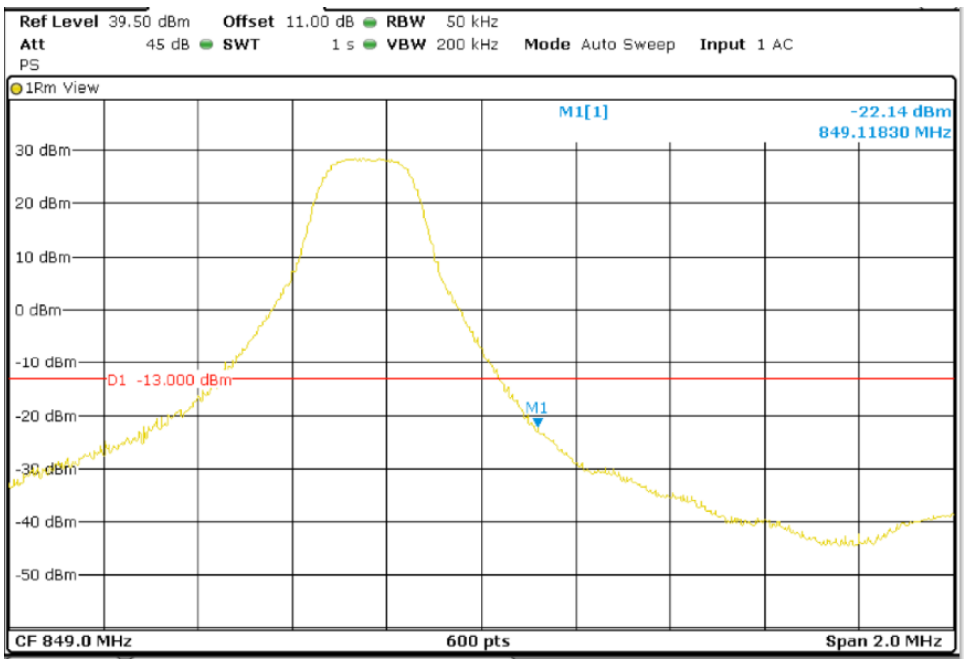

TEST RESULTS (Cont):	

LTE QPSK MODULATION. RB = 15. Offset = 0. BW = 3 MHz

Lowest Channel

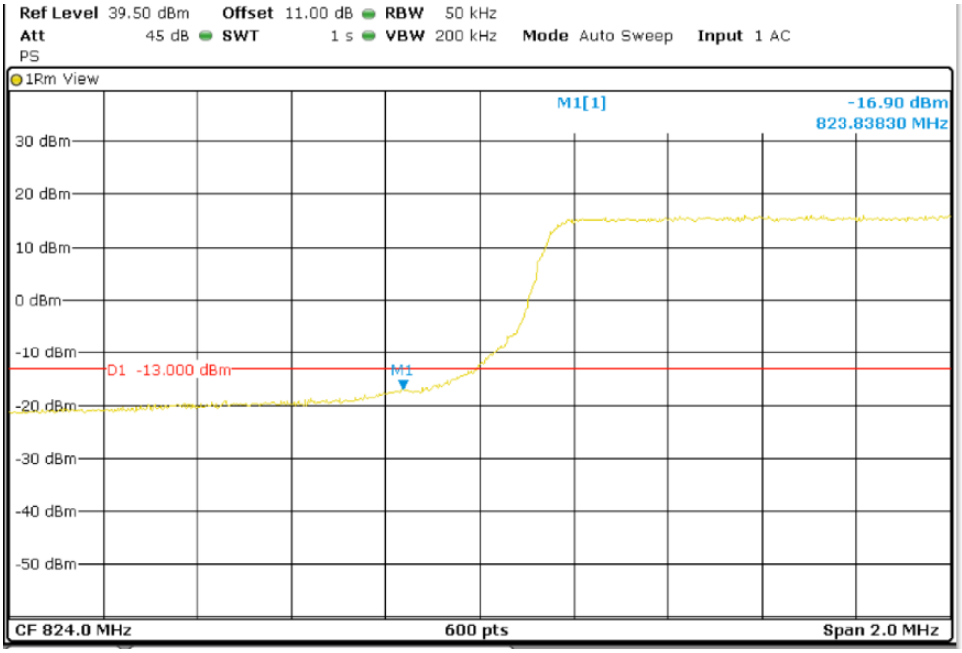

Highest Channel

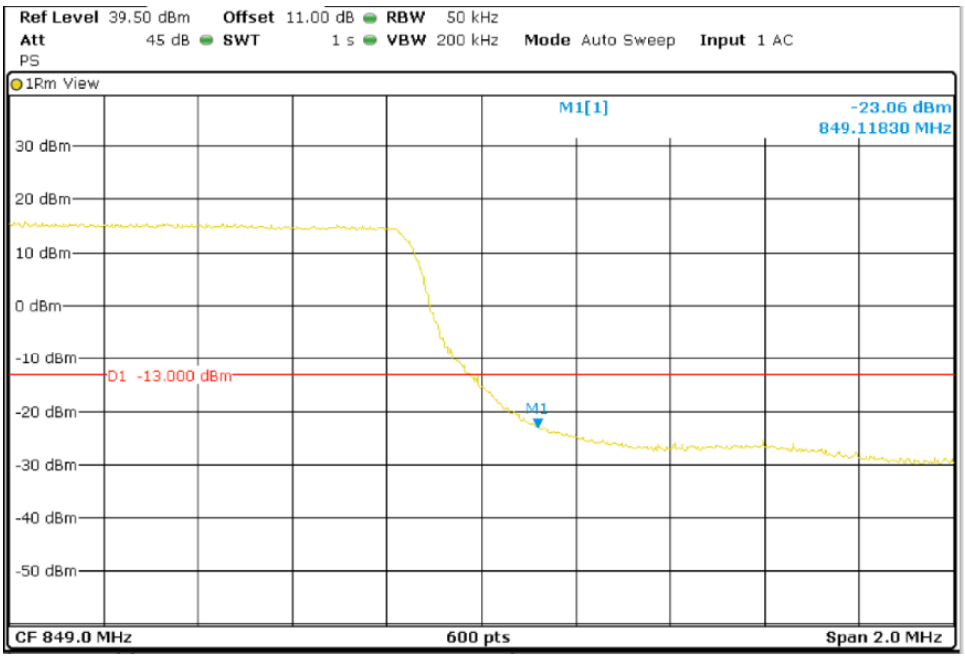

TEST RESULTS (Cont):	

LTE QPSK MODULATION. RB = 1. Offset = 0. BW = 5 MHz

Lowest Channel

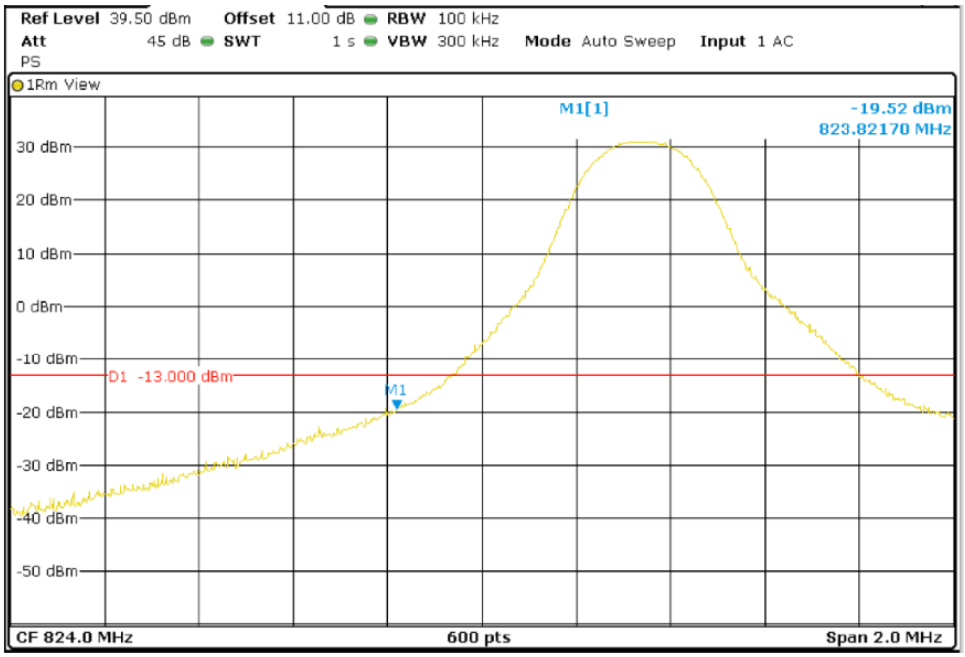

Highest Channel

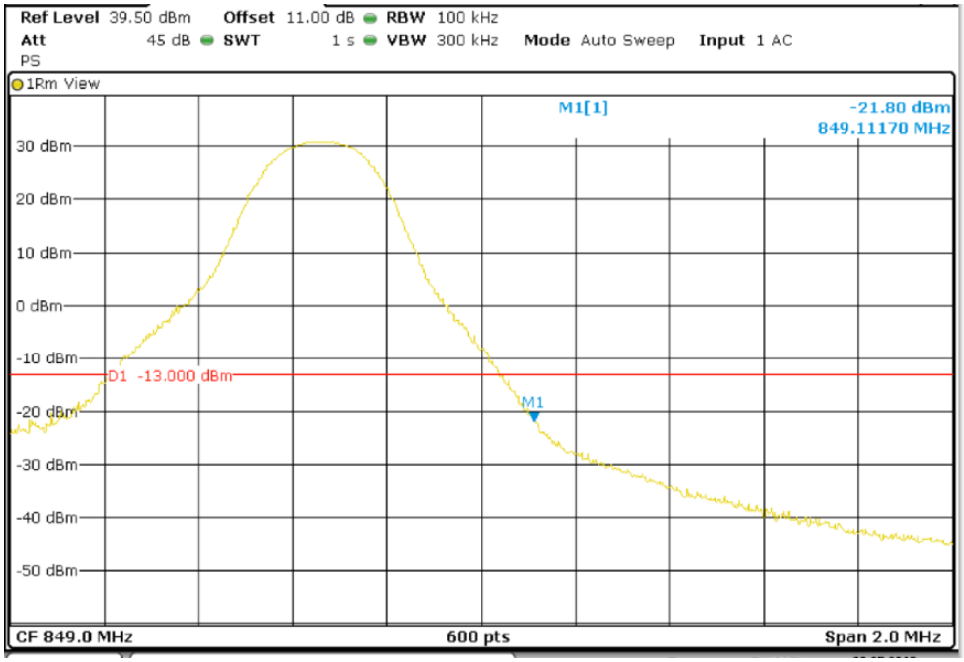

TEST RESULTS (Cont):	

LTE QPSK MODULATION. RB = 25. Offset = 0. BW = 5 MHz

Lowest Channel

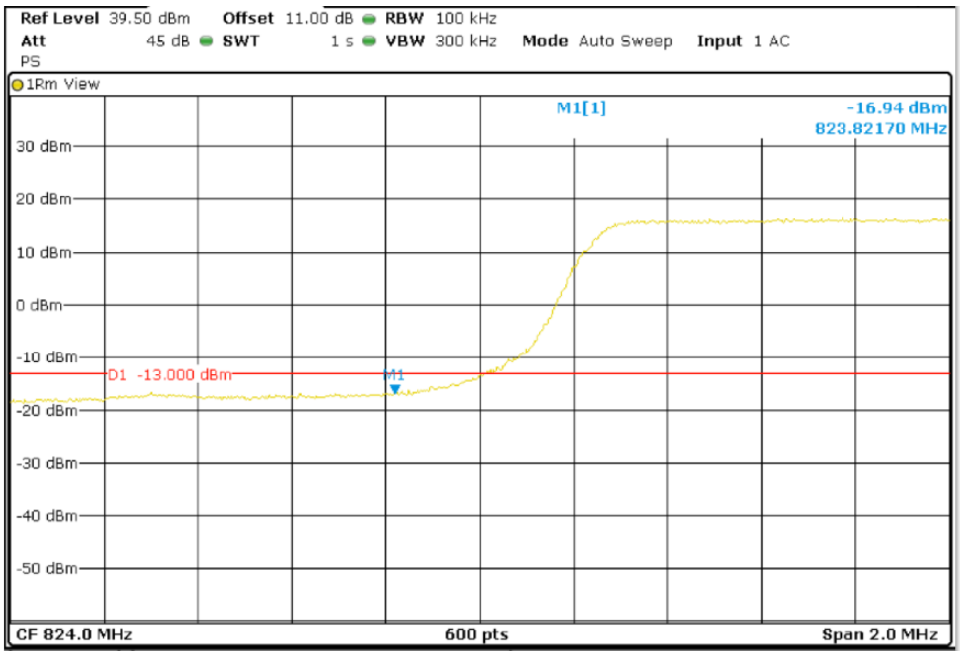

Highest Channel

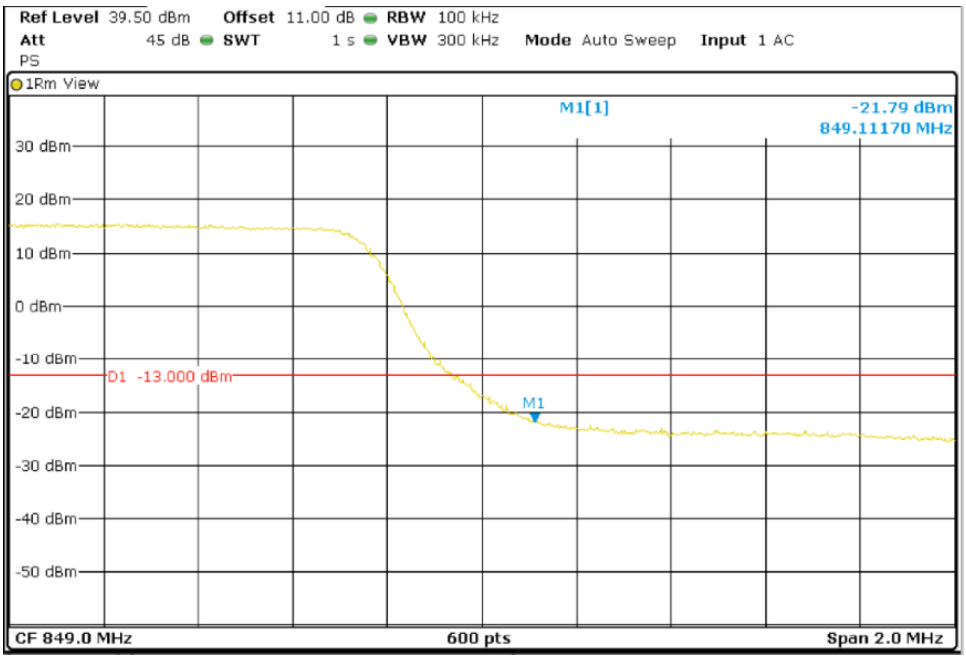

TEST RESULTS (Cont):	

LTE QPSK MODULATION. RB = 1. Offset = 0. BW = 10 MHz

Lowest Channel

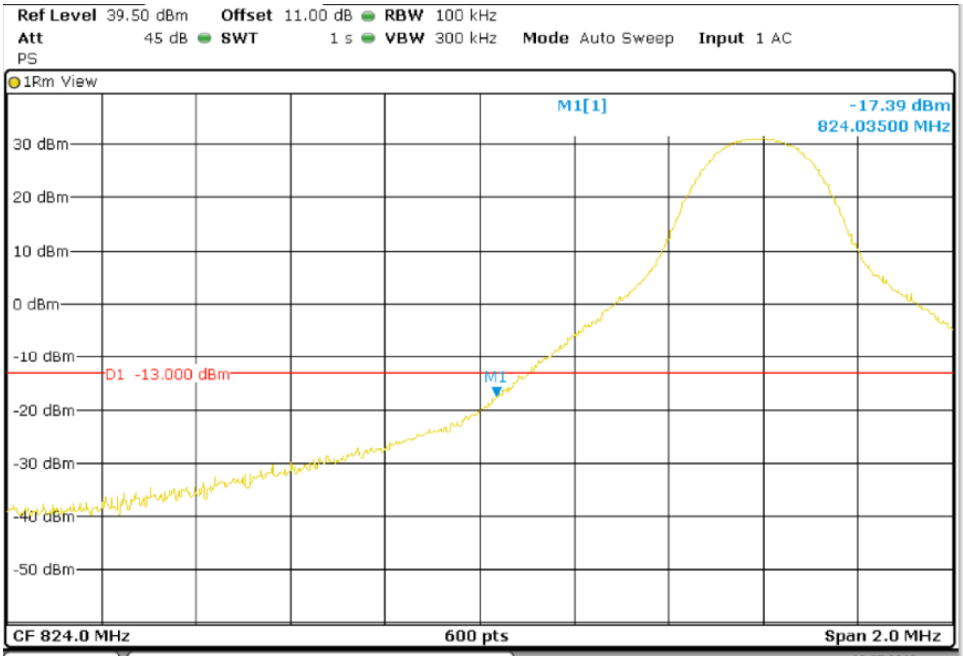

Highest Channel

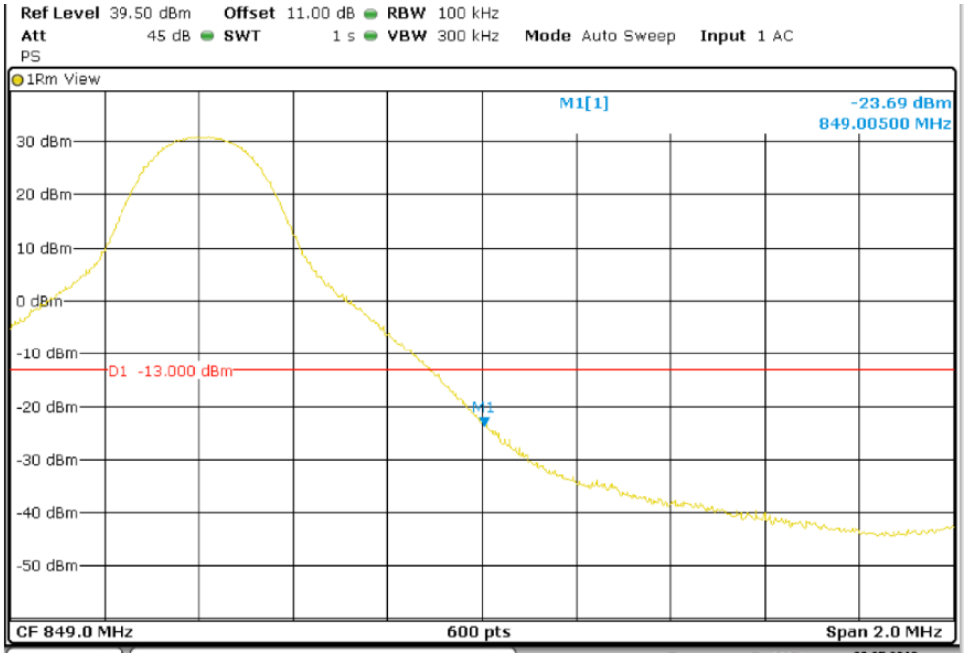

TEST RESULTS (Cont):	

LTE QPSK MODULATION. RB = 50. Offset = 0. BW = 10 MHz

Lowest Channel

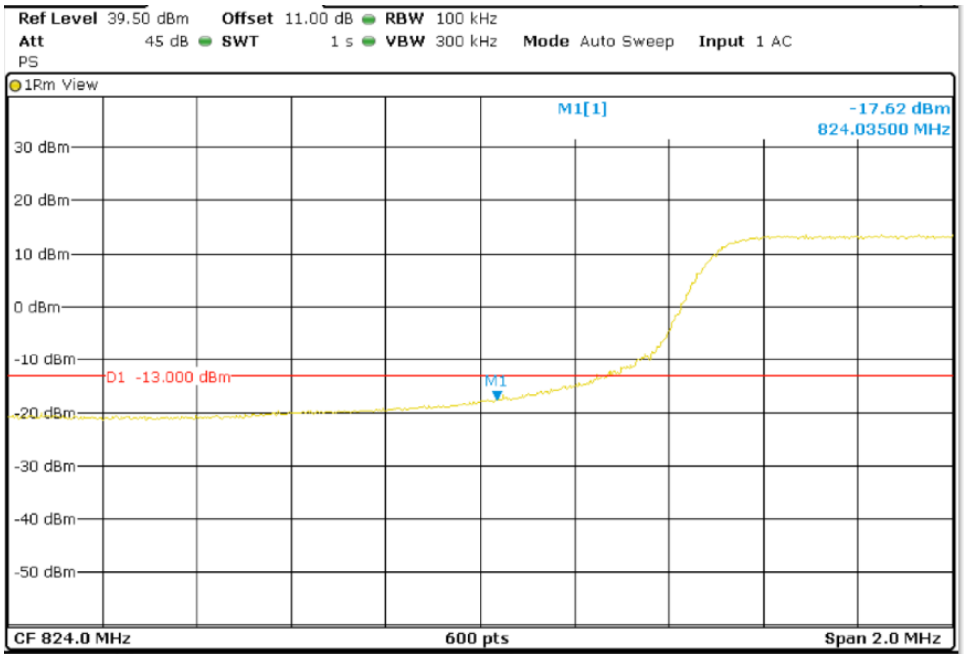

Highest Channel

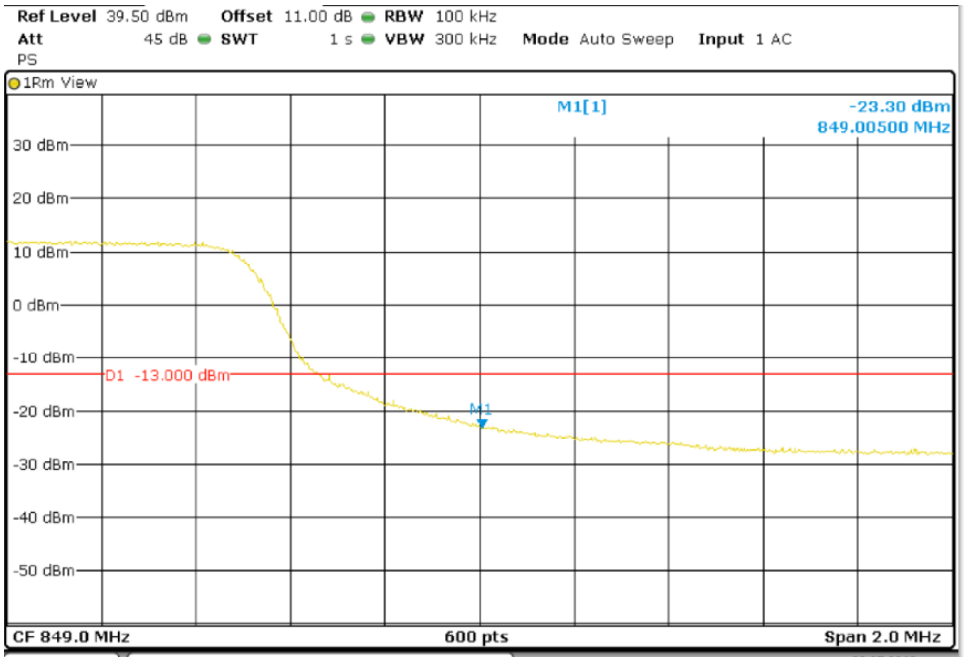

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02
TEST RESULTS:	PASS

GPRS Modulation

MODULATION	GPRS
Maximum measured level at highest Block Edge at antenna port (dBm)	-24.05

MODULATION	GPRS
Maximum measured level at highest Block Edge at antenna port (dBm)	-22.28

Lowest Channel

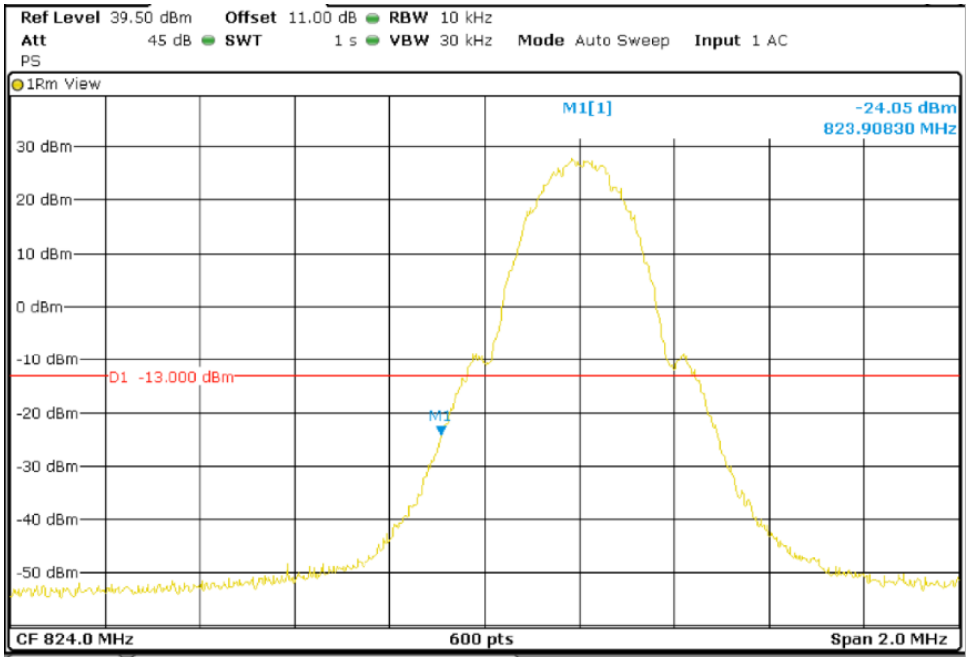

TEST RESULTS (Cont):	

Highest Channel

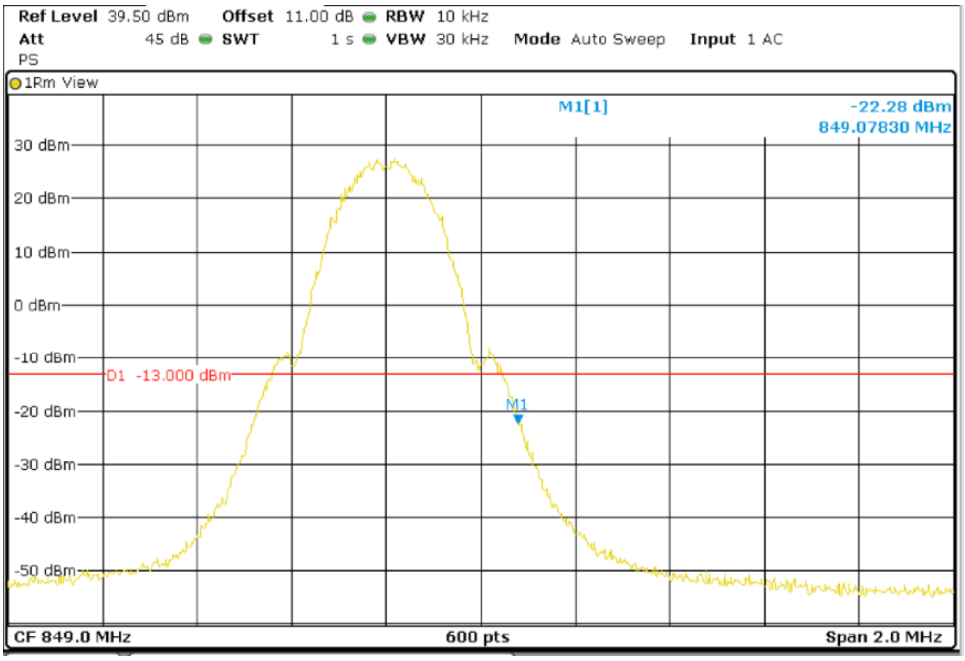

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03
TEST RESULTS:	PASS

WCDMA Modulation

MODULATION	WCDMA
Maximum measured level at highest Block Edge at antenna port (dBm)	-20.14

MODULATION	WCDMA
Maximum measured level at highest Block Edge at antenna port (dBm)	-22.67

TEST RESULTS (Cont):	

WCDMA MODULATION

Lowest Channel

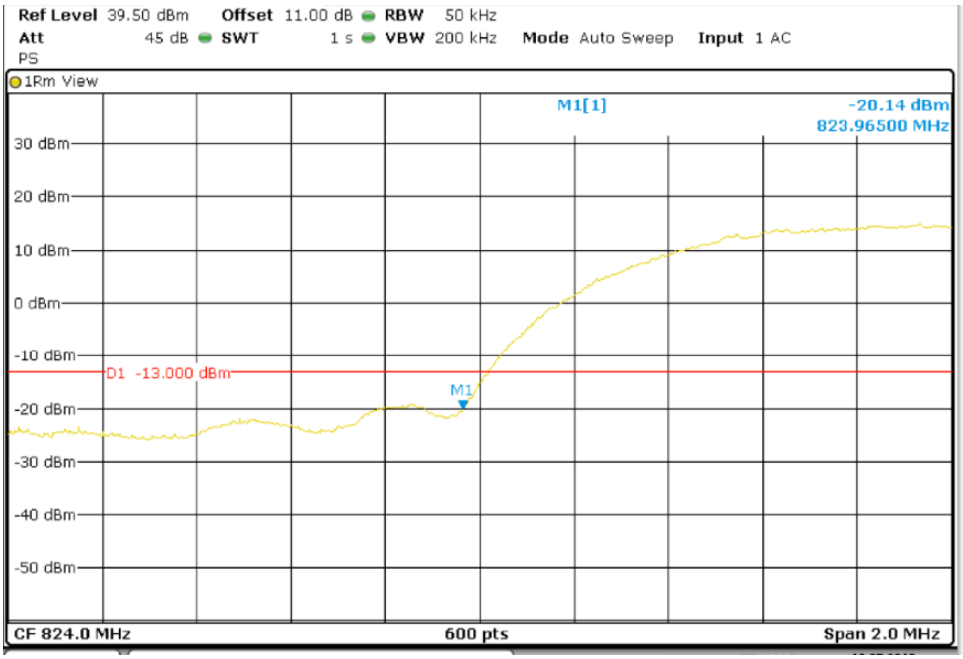

Highest Channel

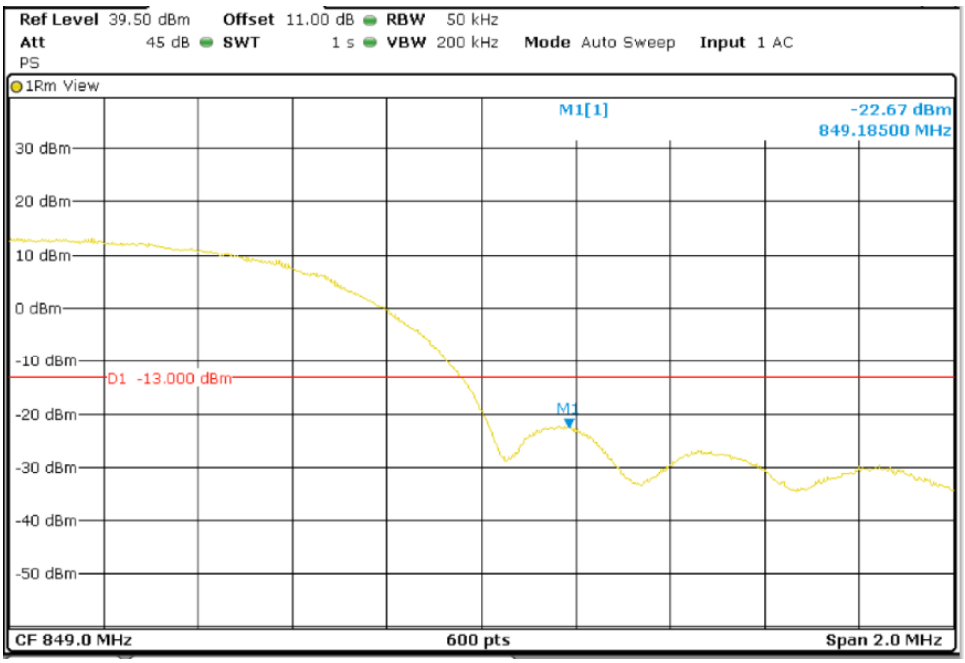

TEST A.7: RADIATED EMISSIONS

LIMITS:	Product standard:	FCC Part 22 / IC RSS-132.
	Test standard:	FCC §2.1053 and §22.917 / RSS-132 Clause 5.5.

LIMITS

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. P in watts.

At Po transmitting power of 2 watts (33 dBm), the specified minimum attenuation becomes 43+10log (Po). and the level in dBm relative to Po becomes:

Po (dBm) – [43 + 10 log (Po in watts)] = -13 dBm

TEST SETUP	

The measurement was performed with the EUT inside an anechoic chamber. The spectrum was scanned from 30 MHz to at least the 10th harmonic of the highest frequency generated within the equipment.

The EUT was placed on a non-conductive stand at a 3-meter distance from the measuring antenna for measurements below 1 GHz and at 1-meter distance for measurements above 1 GHz.

Detected emissions were maximized at each frequency by rotating the EUT and adjusting the measuring antenna height and polarization. The maximum reading was recorded.

Radiated measurements < 1GHz

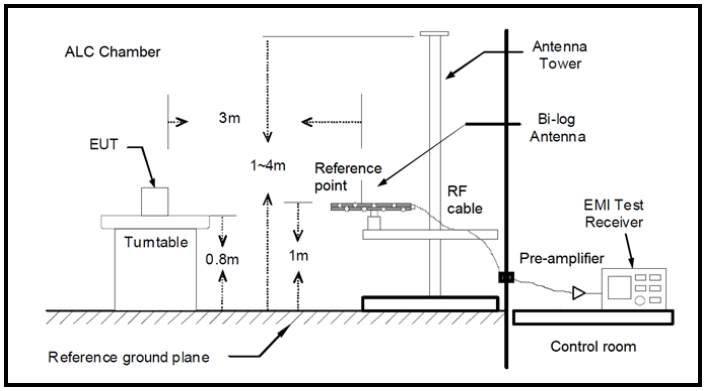

Radiated measurements > 1GHz

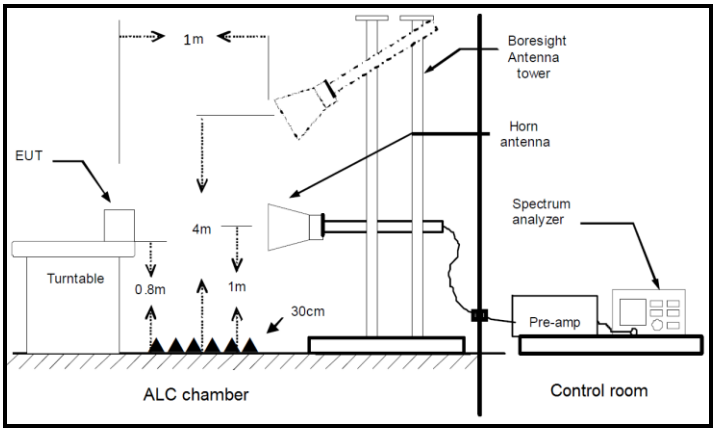

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01
TEST RESULTS:	PASS

RESULTS

A preliminary scan determined the QPSK 5 MHz bandwidth as the worst case. The configuration of Resource Blocks which is the worst case for conducted power was used.

The following plots show the results for this configuration.

LTE QPSK MODULATION. RB = 1. Offset = 0. BW = 5 MHz

TEST RESULTS (Cont):	Lowest Channel

FREQUENCY RANGE: 30-1000 MHz

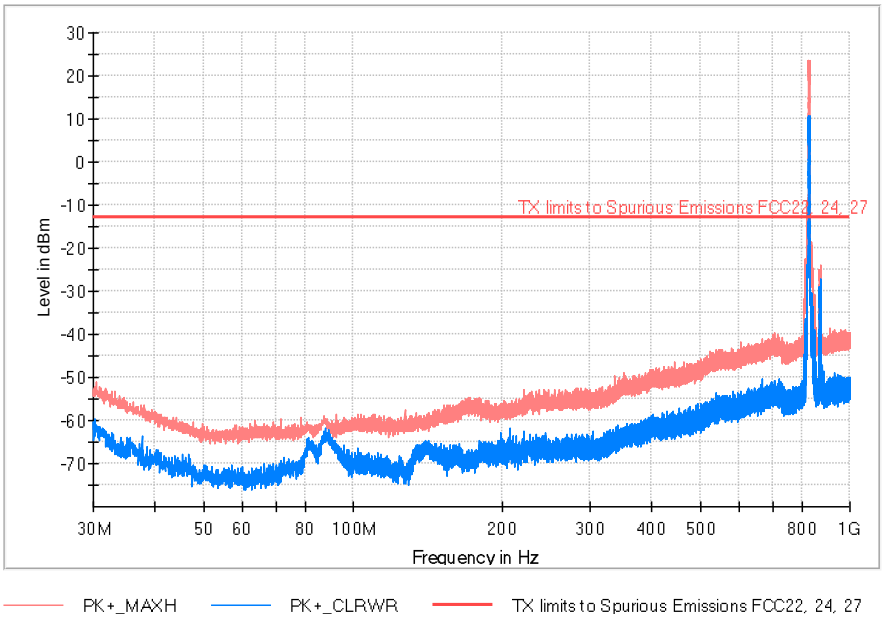

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
87.327000	-64.65	-59.04	
826.596333	8.95	23.67	Fundamental
872.639000	-29.45	-24.03	

TEST RESULTS (Cont):	Lowest Channel

FREQUENCY RANGE: 1-10 GHz

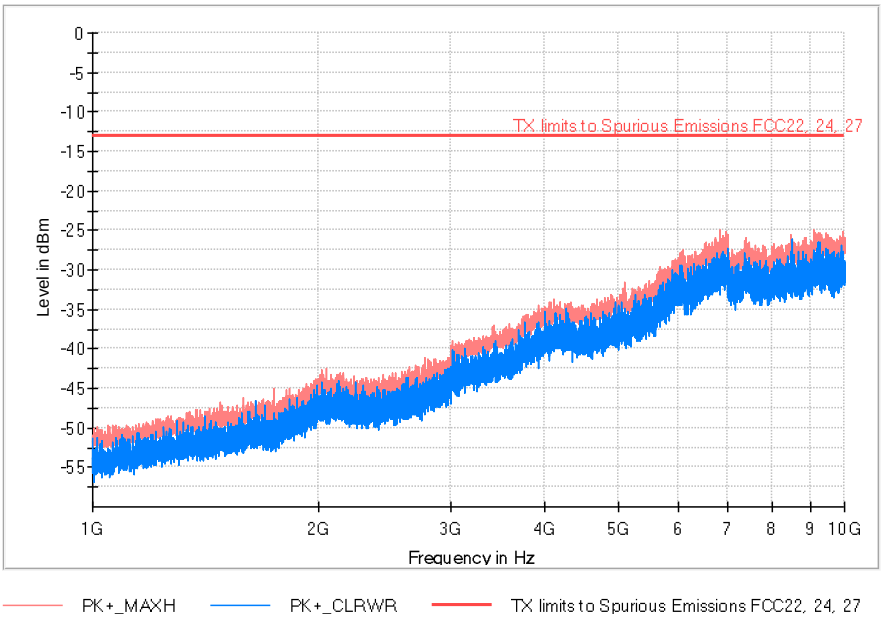

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
2045.200000	-46.84	-42.47	
6816.500000	-32.23	-24.88	
9104.500000	-30.87	-25.02	

TEST RESULTS (Cont):	Middle Channel

FREQUENCY RANGE: 30 MHz-1 GHz

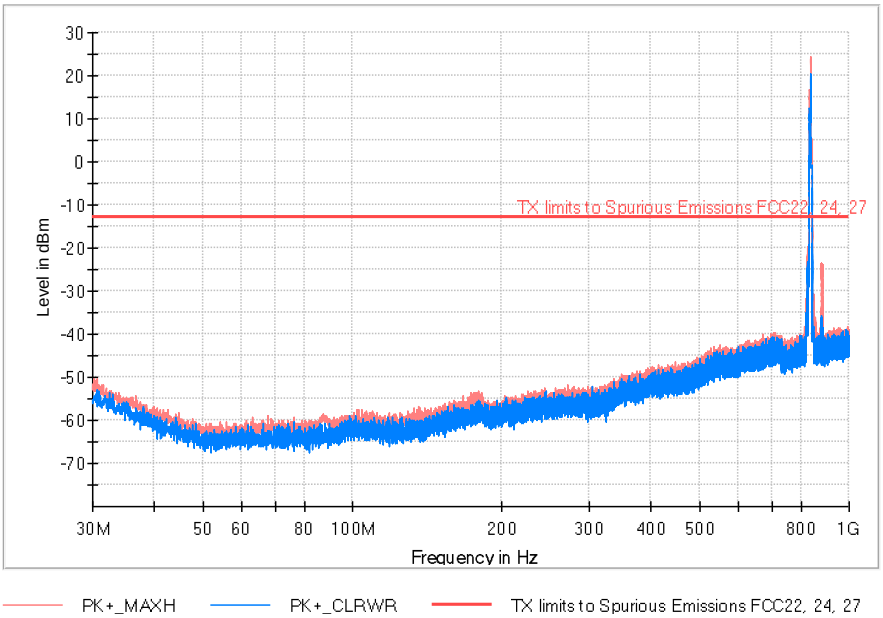

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
87.133000	-65.28	-58.75	
835.455667	20.20	24.44	
880.787000	-38.89	-23.48	**Fundamental**

TEST RESULTS (Cont):	Middle Channel

FREQUENCY RANGE: 1-10 GHz

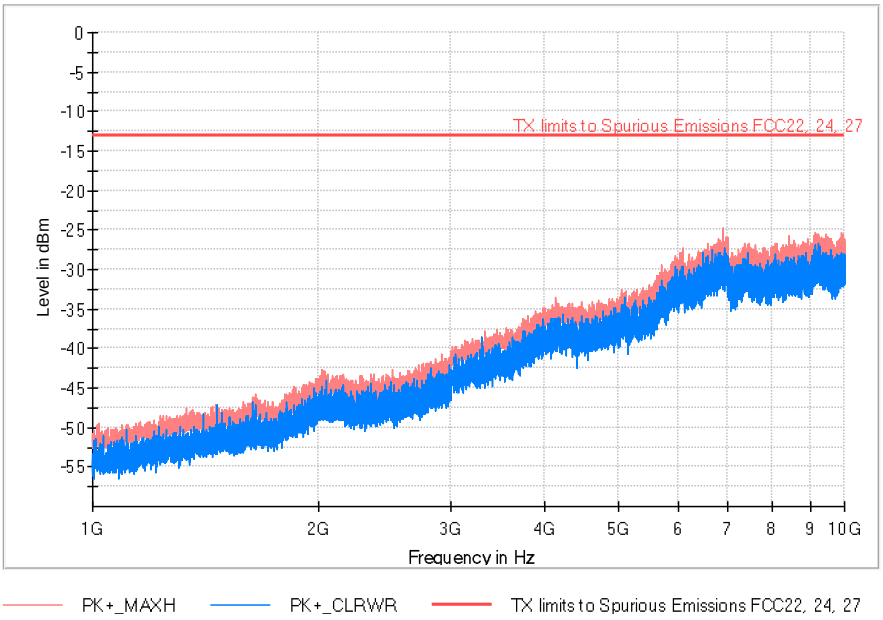

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
2019.600000	-47.06	-42.64	
6882.500000	-31.19	-24.74	
9890.000000	-29.13	-25.25	

TEST RESULTS (Cont):	Highest Channel

FREQUENCY RANGE: 30 MHz-1 GHz

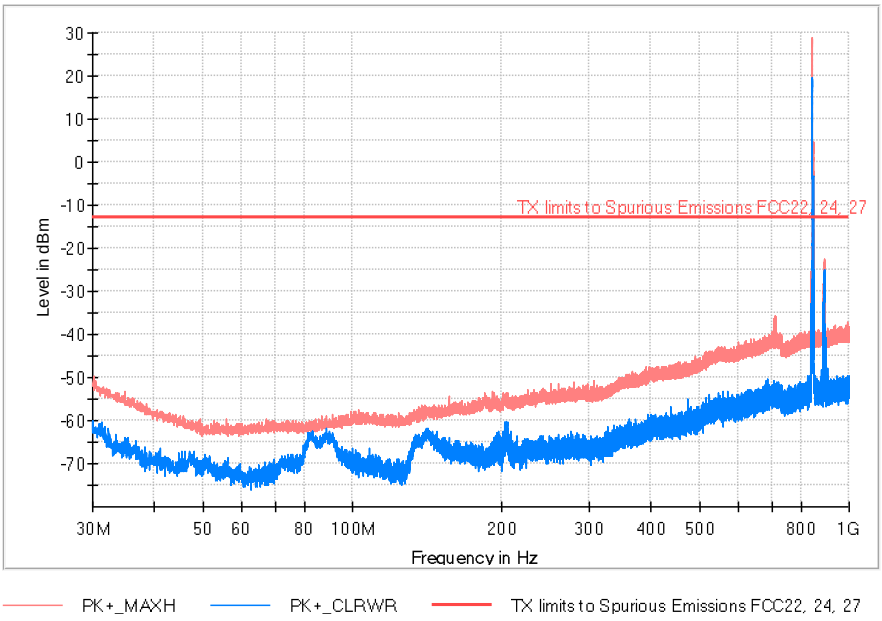

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
83.382333	-62.67	-61.79	
709.323333	-55.08	-35.68	
844.282667	19.42	28.77	**Fundamental**
891.909667	-26.62	-22.74	

TEST RESULTS (Cont):	Highest Channel

FREQUENCY RANGE: 1-10 GHz

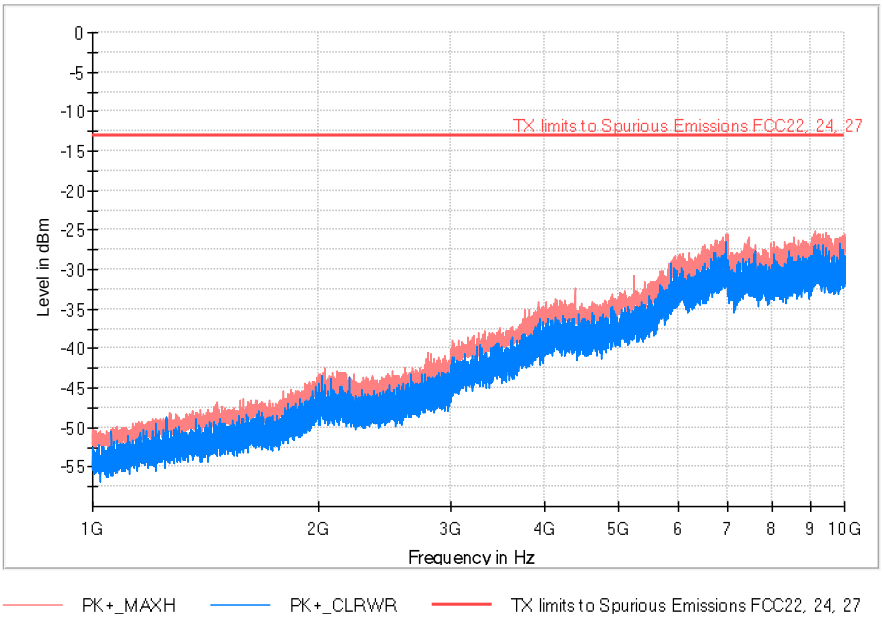

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
2035.400000	-47.54	-42.41	
6978.500000	-30.33	-25.47	
9128.000000	-29.36	-25.19	

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02
TEST RESULTS:	PASS

RESULTS

A preliminary scan determined the GPRS Mode as the worst case.

The following tables and plots show the results for this configuration.

TEST RESULTS (Cont):	Lowest Channel

FREQUENCY RANGE: 30-1000 MHz

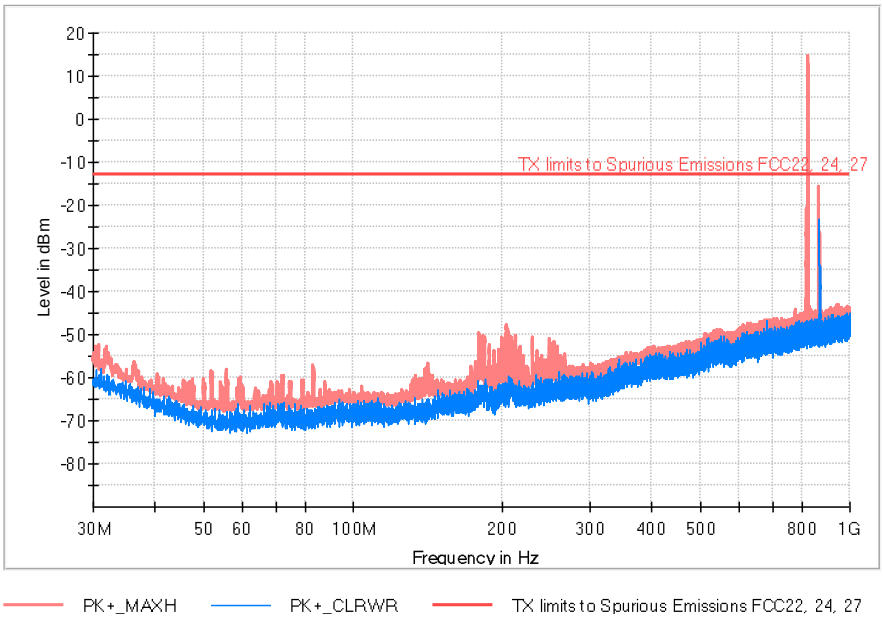

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
83.414667	-69.39	-57.27	
180.123667	-64.16	-49.77	
204.729333	-62.14	-47.81	
823.427667	-50.08	14.48	fundamental
869.308667	-23.62	-15.70	

TEST RESULTS (Cont):	Lowest Channel

FREQUENCY RANGE: 1-10 GHz

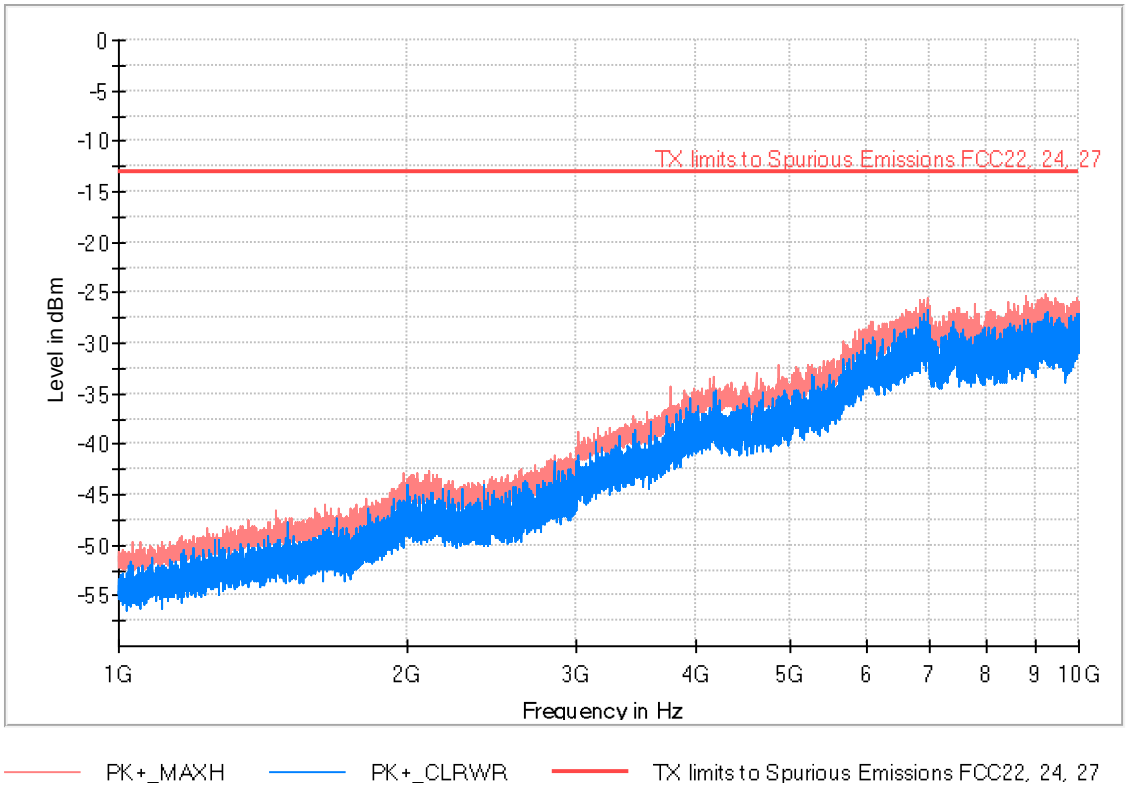

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)
2101.800000	-45.94	-42.57
3753.000000	-40.23	-34.30
8459.500000	-32.17	-25.98

TEST RESULTS (Cont):	Middle Channel

FREQUENCY RANGE: 30 MHz-1 GHz

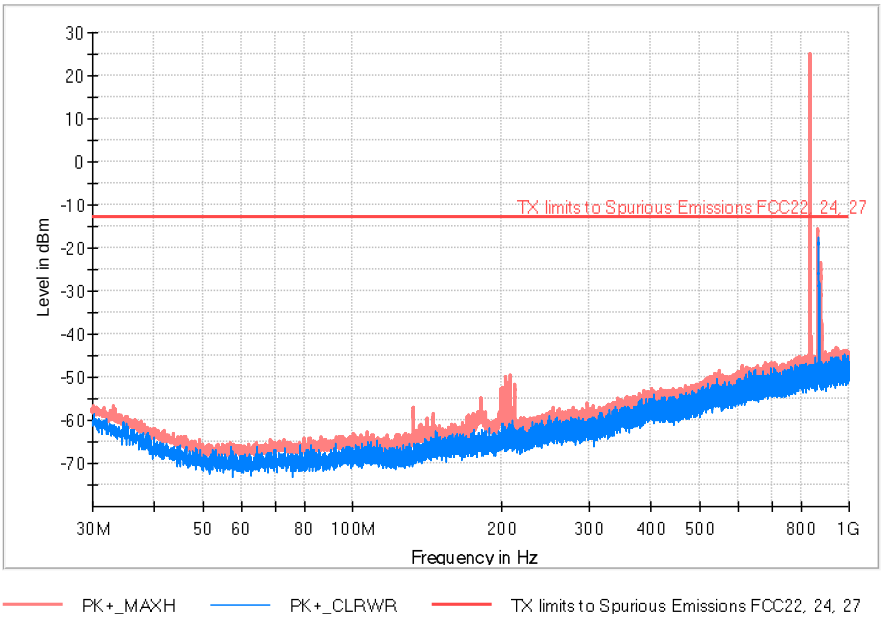

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
182.031333	-65.78	-55.12	
208.803333	-63.63	-49.72	
836.522667	-50.20	25.08	fundamental
869.276333	-17.54	-15.57	
881.498333	-50.30	-23.56	

TEST RESULTS (Cont):	Middle Channel

FREQUENCY RANGE: 1-10 GHz

Maximizations

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)
2455.200000	-47.37	-42.90
6881.500000	-31.22	-25.36
9881.500000	-31.41	-25.31

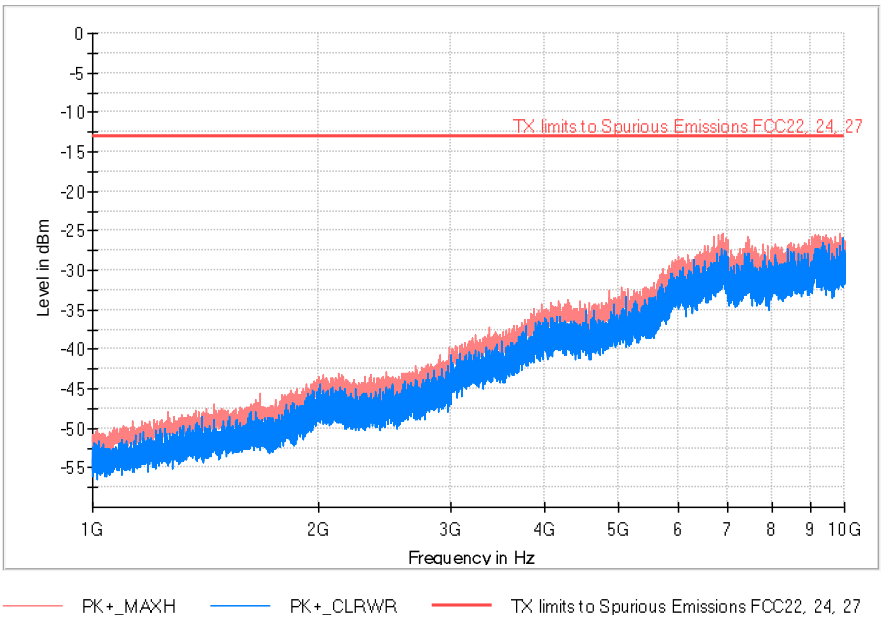

TEST RESULTS (Cont):	Highest Channel

FREQUENCY RANGE: 30 MHz-1 GHz

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
179.477000	-62.57	-55.14	
203.533000	-63.52	-51.73	
848.421333	-49.03	24.13	**fundamental**
893.688000	-28.42	-13.80	

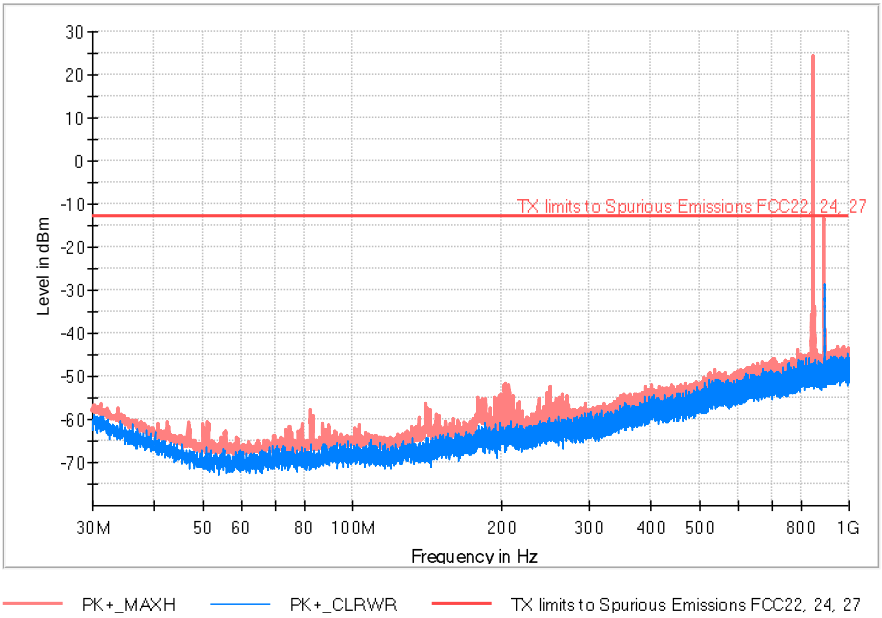

TEST RESULTS (Cont):	Highest Channel

FREQUENCY RANGE: 1-10 GHz

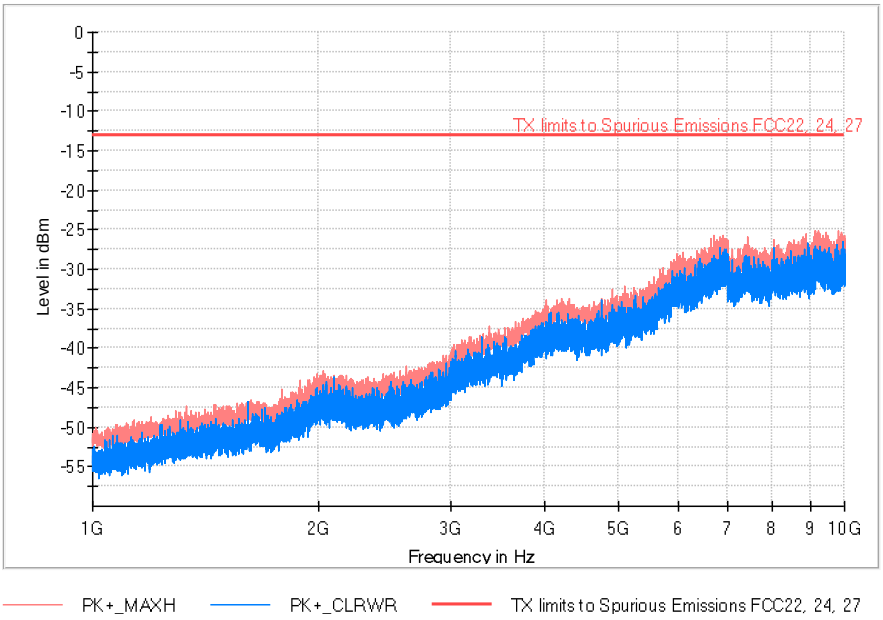

Maximizations

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)
2027.600000	-48.07	-42.86
4006.000000	-39.81	-33.89
7445.500000	-32.64	-25.92

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03
TEST RESULTS:	PASS

RESULTS

A preliminary scan determined the WCDMA Mode as the worst case.

The following tables and plots show the results for this configuration.

TEST RESULTS (Cont):	Lowest Channel

FREQUENCY RANGE: 30-1000 MHz

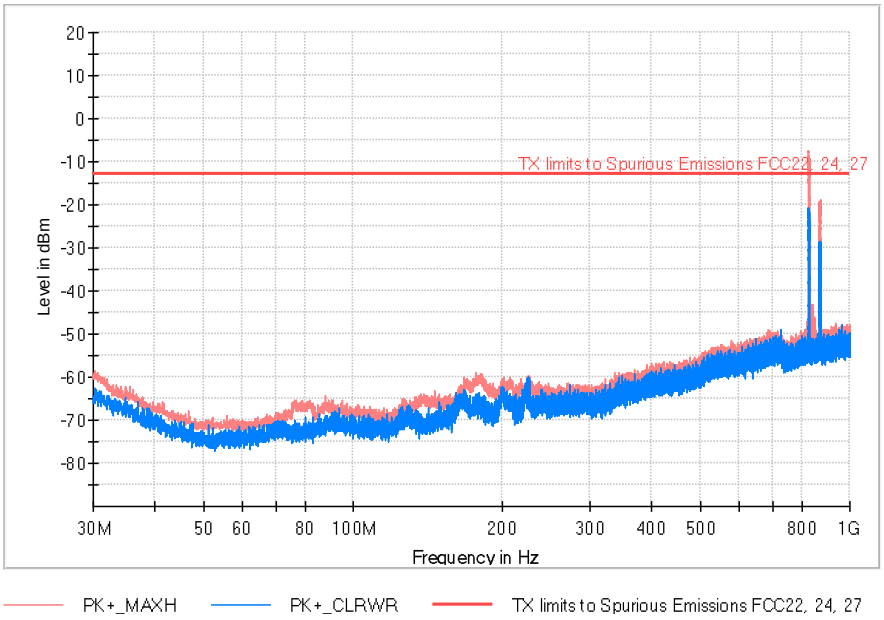

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
87.747333	-72.86	-64.22	
180.253000	-65.82	-59.26	
827.210667	-21.77	-7.54	**Fundamental**
872.768333	-36.71	-18.97	

TEST RESULTS (Cont):	Lowest Channel

FREQUENCY RANGE: 1-10 GHz

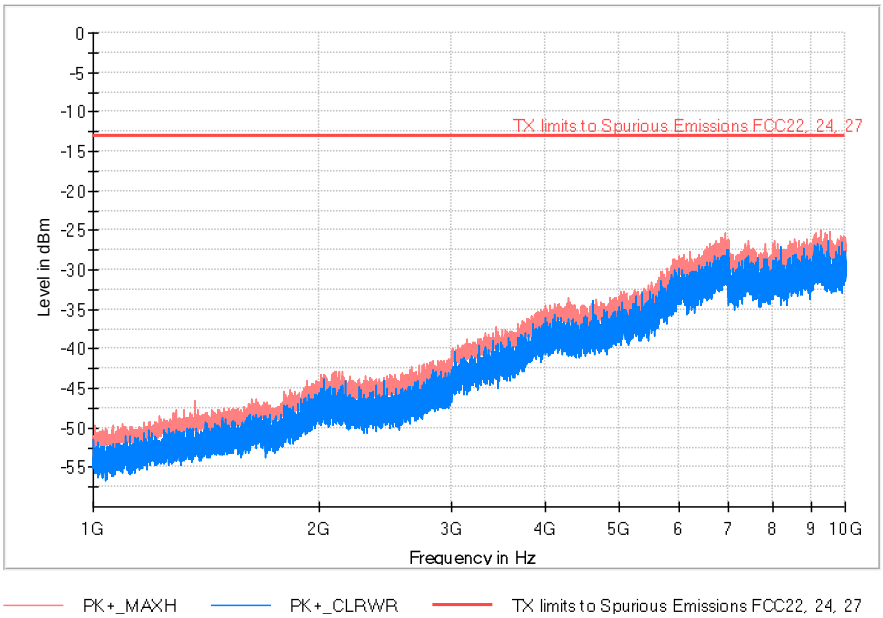

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)
1363.200000	-52.76	-46.53
6922.000000	-29.54	-25.31

TEST RESULTS (Cont):	Middle Channel

FREQUENCY RANGE: 30 MHz-1 GHz

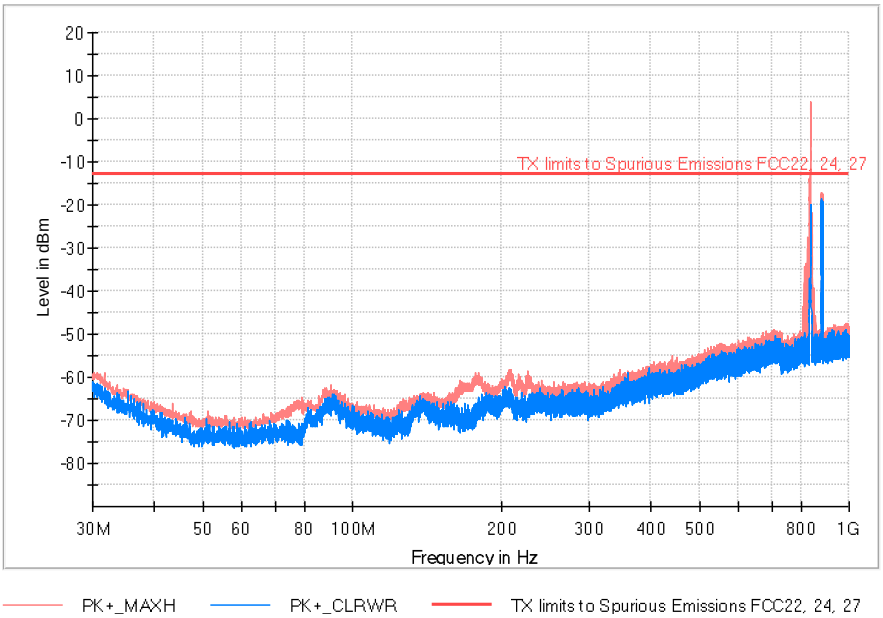

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
90.463333	-66.77	-61.85	
179.832667	-66.49	-58.81	
207.542333	-64.81	-58.10	
837.880667	-20.07	3.75	**Fundamental**
882.533000	-19.47	-17.21	

TEST RESULTS (Cont):	Middle Channel

FREQUENCY RANGE: 1-10 GHz

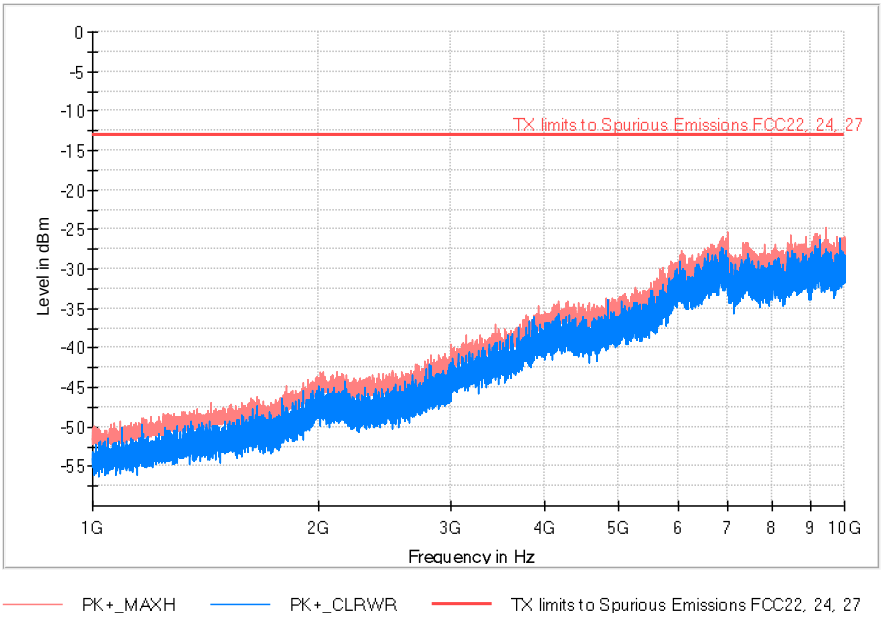

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)
2027.800000	-47.73	-42.98
6985.000000	-29.58	-25.38
9443.000000	-29.74	-24.77

TEST RESULTS (Cont):	Highest Channel

FREQUENCY RANGE: 30 MHz-1 GHz

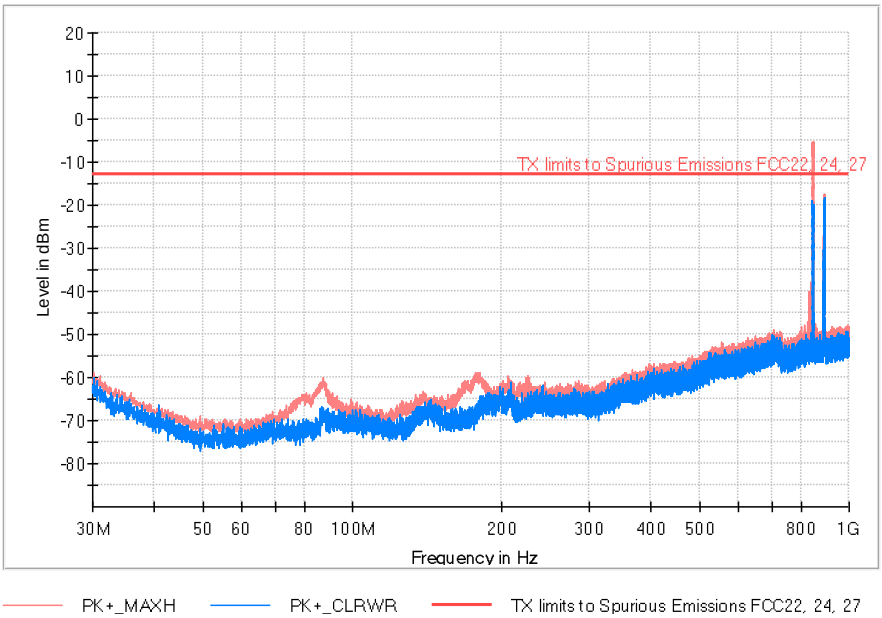

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
87.262333	-69.13	-59.90	
178.636333	-67.87	-58.83	
845.737667	-20.11	-5.29	**Fundamental**
892.685667	-23.48	-17.41	