



Test Report No.8112309391 Rev.A

*On Breezecom Ltd.
One Box 2.4 GHz Radio*

Model: SU-R-2.4

*From The Standards Institution
Of Israel
Industry Division
Telematics Laboratory
EMC Section*



Certificate No.1487-01



Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 1 of 40 Pages
Model: SU-R-2.4

Order placed by:	Breezecom Ltd.
Address:	P.O. Box 13139 Tel Aviv 61131 Israel
Sample for test selected by:	The orderer
The date of test:	11/06/2001; 28/08/2001.

Description of Equipment

Under Test (EUT):	One Box 2.4 GHz Radio
Model:	SU-R-2.4
Manufactured by:	Breezecom Ltd.

Reference Documents:

- ❖ CFR 47 FCC: "Rules and Regulations";
Part 15. "Radio frequency devices";
Subpart C: "Intentional radiators" Sec.15.205, 15.209

Test Results: The EUT was found to be in compliance with the requirements of FCC Rules Part 15 Subpart C Sec.15.205, 15.209.

This Test Report contains 40 pages and may be used only in full.	This Test Report applies only to the specimen tested and may not be applied to other specimens of the same product.
---	--



Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 2 of 40 Pages
Model: SU-R-2.4

Table of Contents

1. EUT Description and operation	3
1.1 General description:	3
1.2 Test requirements:	3
2. Test specification, Methods and Procedures	4
3. Measurements, examinations and derived results	4
3.1 Location of the Test Site:	4
3.2 Test condition:	4
3.3 Radiated emission test:	5
4. Compliance with specification	27
5. Appendix 1: Test equipment used	28
6. Appendix 2: Antenna Factor and Cable Loss	29
7. Appendix 3: Test configuration illustration	30



Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 3 of 40 Pages
Model: SU-R-2.4

1 EUT Description and operation

1.1 General description:

Description of Equipment Under Test (EUT): One Box 2.4 GHz Radio

Model: SU-R-2.4

Manufactured by: Breezecom Ltd.

The EUT is a spread spectrum transmitter operating within the frequency band 2400 – 2483 MHz.

The measurements were performed with 3 different detachable antennas as described below:

No	Antenna description	Breezecom name	MFR name
1	Flat panel patch antenna	UNI-8.5	Huber-Shuner SPA 2400/75/9/0/V 2300-2500MHz
2	Flat panel patch antenna	UNI-7	M/A -Com
3	2 x antenna	Omni-6dBi	NA

1.2 Test requirements:

1. Spurious emission measurements up to 10th harmonic for low, middle and high channels. Test requirements per FCC Part 15 Subpart C Sec.15.209.
2. Radiated emission measurements in restricted bands 2310-2390 MHz and 2483.5-2500 MHz for low, middle and high channel. Test requirements per FCC Part 15 Subpart C Sec.15.205, 15.35.



Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 4 of 40 Pages
Model: SU-R-2.4

2 Test specification, Methods and Procedures

Test Specification:

- ❖ CFR 47 FCC: "Rules and Regulations";
Part 15. "Radio frequency devices";
Subpart C: "Intentional radiators". Sec.15.205, 15.209

Methods and Procedures:

- ❖ ANSI C63/4/1992: "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz".

3 Measurements, examinations and derived results

3.1 Location of the Test Site:

EMC laboratory of the Standards Institution of Israel in Tel-Aviv.

3.2 Test condition:

Temperature: 22 °C
Humidity: 60 %



Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 5 of 40 Pages
Model: SU-R-2.4

3.3 Radiated emission test:

3.3.1 Test procedure:

The measurements were performed in the Anechoic Chamber.
The EUT was arranged on a non-metallic table 0.8 m placed on the turntable. The turntable was slowly rotated to find the maximum emissions.
All measurements were performed at a 1 m measurement distance, antenna height was about 1m.
Measuring antenna used: Double Ridge
Measuring detector function and bandwidths:

Detector type	Peak
Resolution bandwidth	1MHz
Video bandwidth	1 MHz

Detector type	Average
Resolution bandwidth	1MHz
Video bandwidth	3 kHz*

* Note 1: The Video Bandwidth of 3 kHz instead of 10 Hz was used (at this condition the lowest level of averaged signal was measured).

The frequency range was investigated from 4804 MHz up to 24780 MHz. Results above 18GHz are not calibrated. No harmonics above 18GHz were detected.

3.3.2 Radiated emission test results:

The test results of spurious emissions measurements are shown in table #1 to #9 .

The test results of emissions in restricted bands are shown in Plots #1 to #12.

Note 2 : The measurements were performed at 1 m distance instead of 3 m, thus the specified limit line of 54 dB μ V/m (for Average detector) 74 dB μ V/m (for Peak detector) were raised to 10 dB.



Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 6 of 40 Pages
Model: SU-R-2.4

Table 1. Spurious emissions test results

Tested unit: SU-R-2.4
 Antenna Breezecom name: UNI-8.5
 Antenna MFR name: Huber-Shuner SPA 2400/75/9/0/V 2300-2500MHz

Low operating frequency 2402 MHz

Frequency (MHz)	Emission level (dBμV/m)	Limit @ 3m (dBμV/m)	Margin (dB)	Results
4804	39.18	53.9	24.22	Complies
7206	53.53		9.87	Complies
9608	39.16		24.24	Complies
12010	34.56		28.84	Complies
14412	40.97		22.43	Complies
16814	39.34		24.06	Complies
19216	43.87		19.53	Complies
21618	45.26		18.14	Complies
24020	48.01		15.39	Complies

Note : Emission level = E Reading (dBμV) + Cable loss (dB) + Antenna Factor (dB/m) + Distance correction factor
 For Cable Loss and Antenna Factor refer to Appendix 2.
 Distance correction factor = -9.5 dB (correction to extrapolation reading from 1 m to 3m specified distance)



Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 7 of 40 Pages
Model: SU-R-2.4

Table 2. Spurious emissions test results

Tested unit: SU-R-2.4
 Antenna Breezecom name: UNI-8.5
 Antenna MFR name: Huber-Shuner SPA 2400/75/9/0/V 2300-2500MHz

Middle operating frequency 2441 MHz

Frequency (MHz)	Emission level (dBμV/m)	Limit @ 3m (dBμV/m)	Margin (dB)	Results
4882	29.09	53.9	24.81	Complies
7323	46.94		6.96	Complies
9764	23.99		29.91	Complies
12205	25.52		28.38	Complies
14646	30.31		23.59	Complies
17087	31.61		22.29	Complies
19528	45.17		18.23	Complies
21969	46.45		16.95	Complies
24410	48.65		14.75	Complies



Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 8 of 40 Pages
Model: SU-R-2.4

Table 3. Spurious emissions test results

Tested unit: SU-R-2.4
Antenna Breezecom name: UNI-8.5
Antenna MFR name: Huber-Shuner SPA 2400/75/9/0/V 2300-2500MHz

High operating frequency 2478 MHz

Frequency (MHz)	Emission Level (dBμV/m)	Limit @ 3m (dBμV/m)	Margin (dB)	Results
4956	32.29	53.9	21.61	Complies
7434	40.67	53.9	13.23	Complies
9912	23.97	53.9	29.93	Complies
12390	26.19	53.9	27.71	Complies
14868	29.73	53.9	24.17	Complies
17346	32.29	53.9	21.61	Complies
19824	45.39	53.9	18.01	Complies
22302	45.86	53.9	17.54	Complies
24780	48.38	53.9	15.02	Complies



Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 9 of 40 Pages
Model: SU-R-2.4

Table 4. Spurious emissions test results

Tested unit: SU-R-2.4
Antenna Breezecom name: UNI-7
Antenna MFR name: M/A -Com

Low operating frequency 2402 MHz

Frequency (MHz)	Emission Level (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)	Results
4804	27.81	53.9	26.09	Complies
7206	40.95	53.9	12.95	Complies
9608	31.02	53.9	22.88	Complies
12010	25.7	53.9	28.2	Complies
14412	31.44	53.9	22.46	Complies
16814	30.59	53.9	23.31	Complies
19216	44.54	53.9	18.86	Complies
21618	45.79	53.9	17.61	Complies
24020	47.93	53.9	15.47	Complies
26422	48.48	53.9	14.92	Complies



Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 10 of 40 Pages
Model: SU-R-2.4

Table 5. Spurious emissions test results

Tested unit: SU-R-2.4
Antenna Breezecom name: UNI-7
Antenna MFR name: M/A -Com

Middle operating frequency 2441 MHz

Frequency (MHz)	Emission Level (dB μ V/m)	Limit @ 3 m (dB μ V/m)	Margin (dB)	Results
4882	32.49	53.9	21.41	Complies
7323	42.83	53.9	11.07	Complies
9764	24.3	53.9	29.6	Complies
12205	29.5	53.9	24.4	Complies
14646	31.25	53.9	22.65	Complies
17087	34.77	53.9	19.13	Complies
19528	45.32	53.9	18.08	Complies
21969	46.77	53.9	16.63	Complies
24410	41.71	53.9	21.69	Complies
26851	48.8	53.9	14.6	Complies



Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 11 of 40 Pages
Model: SU-R-2.4

Table 6. Spurious emissions test results

Tested unit: SU-R-2.4
Antenna Breezecom name: UNI-7
Antenna MFR name: M/A -Com

High operating frequency 2478

Frequency (MHz)	Emission Level (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)	Results
4956	33.43	53.9	20.47	Complies
7434	42.96	53.9	10.94	Complies
9912	30.21	53.9	23.69	Complies
12390	26.09	53.9	27.81	Complies
14868	30.13	53.9	23.77	Complies
17346	32.15	53.9	21.75	Complies
19824	45.11	53.9	18.29	Complies
22302	45.54	53.9	17.86	Complies
24780	47.85	53.9	15.55	Complies



Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 12 of 40 Pages
Model: SU-R-2.4

Table 7 Spurious emissions test results

Tested unit: SU-R-2.4
Antenna Breezecom name: 2X Antenna OMNI-6dBi
Antenna MFR name: NA

Low operating frequency 2402 MHz

Frequency (MHz)	Emission Level (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)	Results
4804	33.35	53.9	20.55	Complies
7206	37.53	53.9	16.37	Complies
9608	25.53	53.9	28.37	Complies
12010	24.47	53.9	29.43	Complies
14412	30.28	53.9	23.62	Complies
16814	29.84	53.9	24.06	Complies
19216	43.57	53.9	19.83	Complies
21618	44.8	53.9	18.6	Complies
24020	47.37	53.9	16.03	Complies



Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 13 of 40 Pages
Model: SU-R-2.4

Table 8 Spurious emissions test results

Tested unit: SU-R-2.4
Antenna Breezecom name: 2X Antenna OMNI-6dBi
Antenna MFR name: NA

Middle operating frequency 2441 MHz

Frequency (MHz)	Emission Level (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)	Results
4882	33.37	53.9	20.53	Complies
7323	40.76	53.9	13.14	Complies
9764	23.47	53.9	30.43	Complies
12205	32.3	53.9	21.6	Complies
14646	29.65	53.9	24.25	Complies
17087	30.55	53.9	23.35	Complies
19528	43.91	53.9	19.99	Complies
21969	45.29	53.9	18.61	Complies
24410	47.28	53.9	16.62	Complies



Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 14 of 40 Pages
Model: SU-R-2.4

Table 9 Spurious emissions test results

Tested unit: SU-R-2.4
Antenna Breezecom name: 2X Antenna OMNI-6dBi
Antenna MFR name: NA

High operating frequency 2478 MHz

Frequency (MHz)	Emission Level (dB μ V/m)	Limit @ 3 m (dB μ V/m)	Margin (dB)	Results
4956	30.35	53.9	23.55	Complies
7434	42.42	53.9	11.48	Complies
9912	22.64	53.9	31.26	Complies
12390	24.75	53.9	29.15	Complies
14868	28.21	53.9	25.69	Complies
17346	30.69	53.9	23.21	Complies
19824	43.82	53.9	19.58	Complies
22302	44.05	53.9	19.35	Complies
24780	46.73	53.9	16.67	Complies




Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 15 of 40 Pages
Model: SU-R-2.4

Plot #1

Radiated emissions measured in restricted band 2483.5 –2500 MHz

Antenna Breezecom name: UNI-8.5
Antenna MFR name: Huber-Shuner SPA 2400/75/9/0/V 2300-2500MHz
Detector used: Average

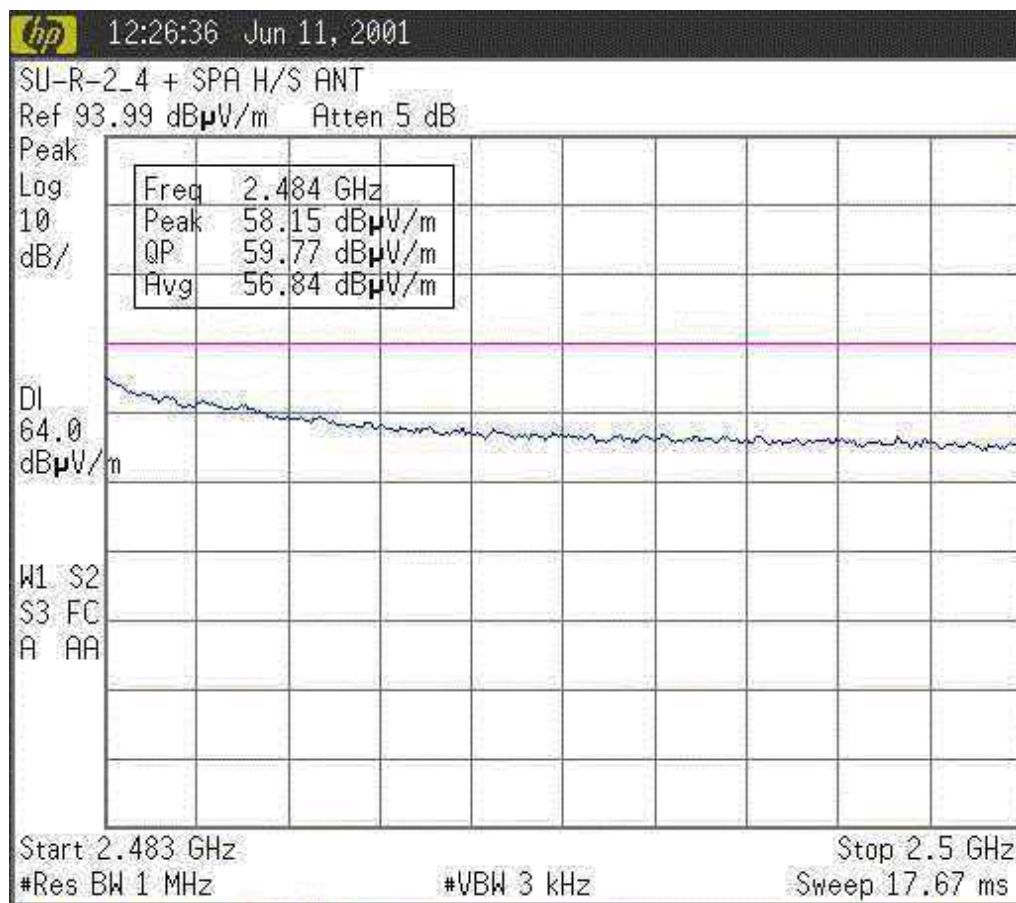




Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 16 of 40 Pages
Model: SU-R-2.4

Plot #2

Radiated emissions measured in restricted band 2310–2390 MHz

Antenna Breezecom name: UNI-8.5
Antenna MFR name: Huber-Shuner SPA 2400/75/9/0/V 2300-2500MHz
Detector used: Average

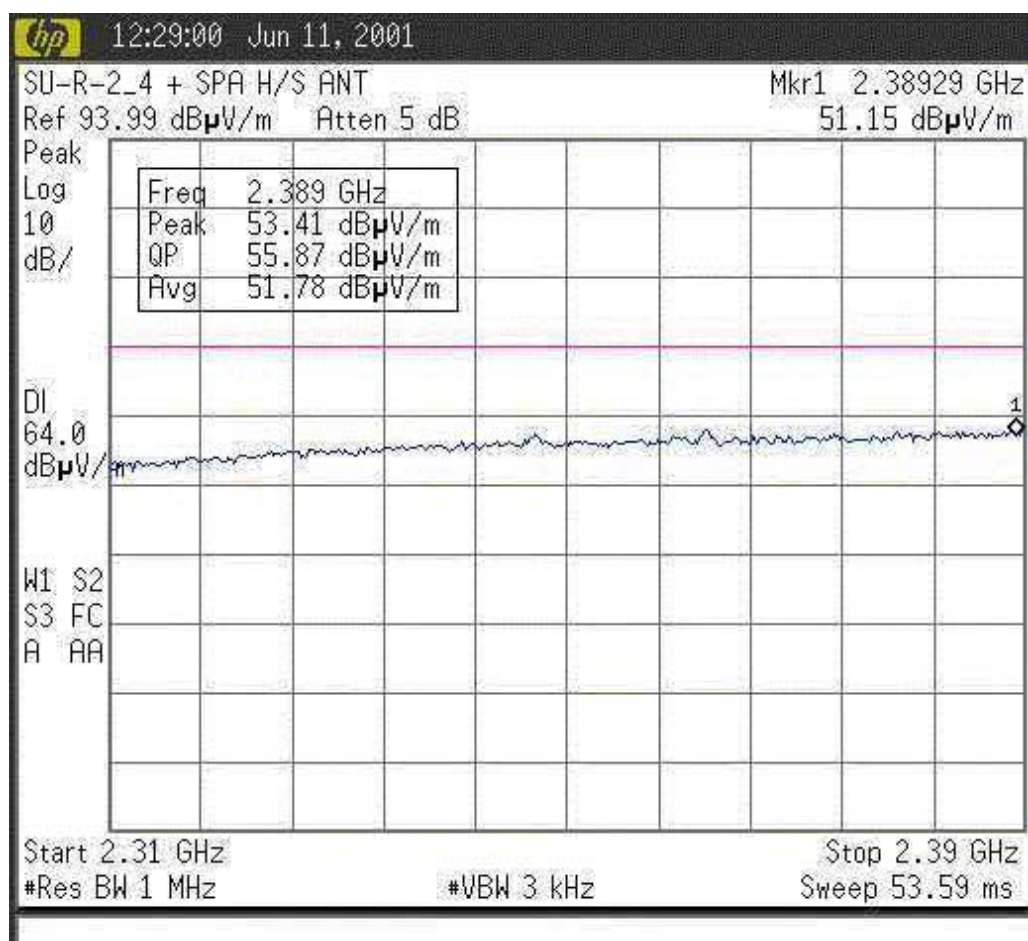




Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 17 of 40 Pages
Model: SU-R-2.4

Plot #3

Radiated emissions measured in restricted band 2310 –2390 MHz

Antenna Breezecom name: UNI-8.5
 Antenna MFR name: Huber-Shuner SPA 2400/75/9/0/V 2300-2500MHz
 Detector used: Peak

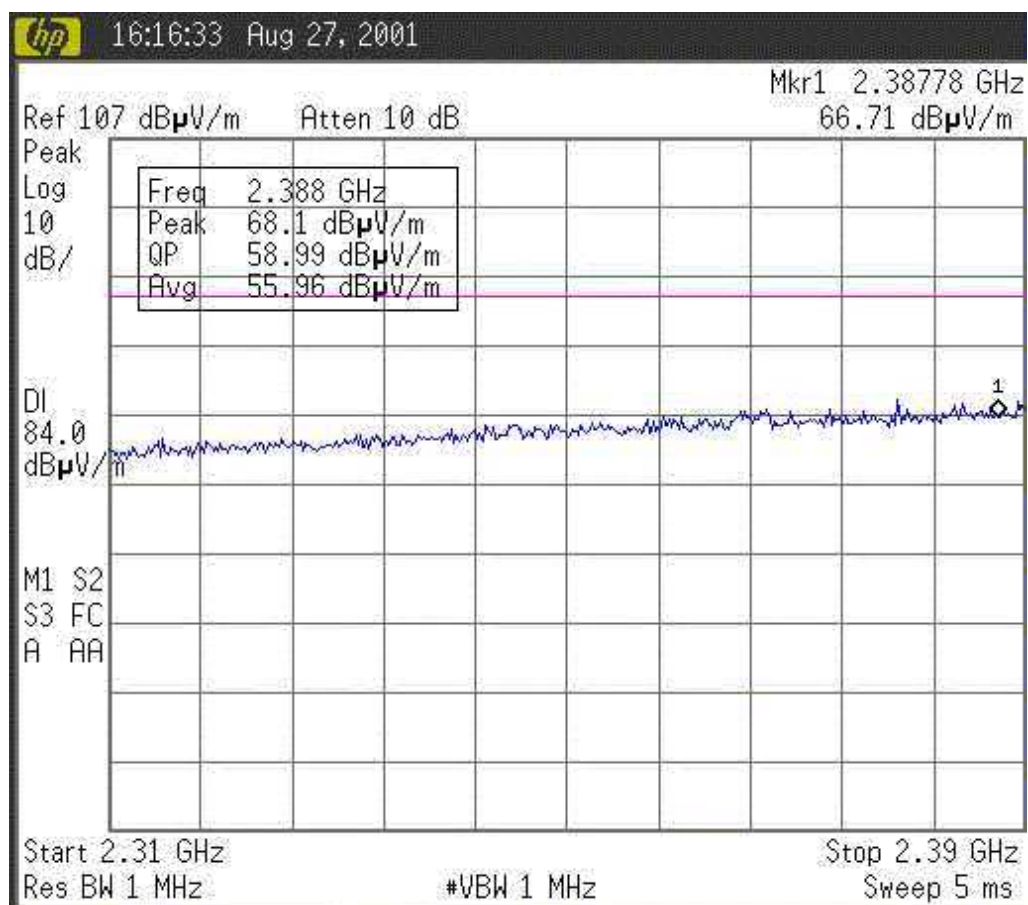




Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 18 of 40 Pages
Model: SU-R-2.4

Plot #4

Radiated emissions measured in restricted band 2483.5 –2500 MHz

Antenna Breezecom name: UNI-8.5
 Antenna MFR name: Huber-Shuner SPA 2400/75/9/0/V 2300-2500MHz
 Detector used: Peak

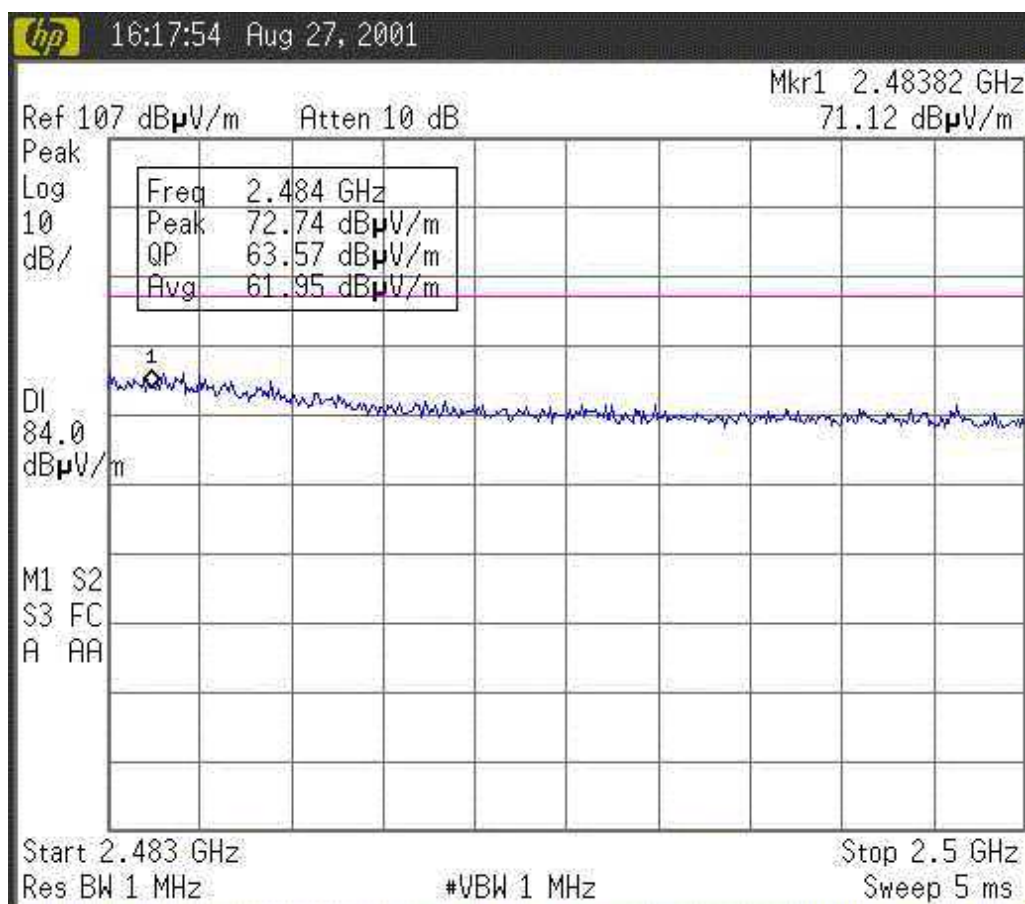




Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 19 of 40 Pages
Model: SU-R-2.4

Plot #5 Radiated emissions measured in restricted band 2310–2390 MHz

Antenna Breezecom name: UNI-7
Antenna MFR name: M/A –Com
Detector used: Average

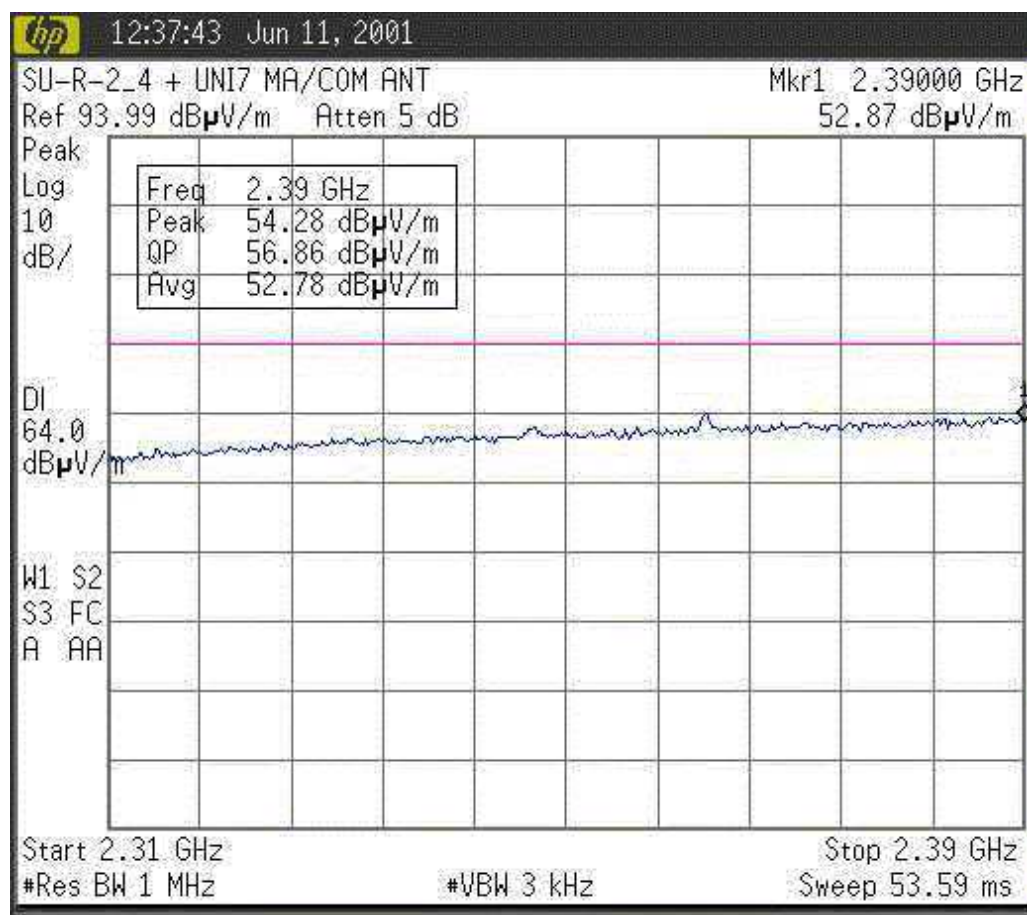




Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 20 of 40 Pages
Model: SU-R-2.4

Plot #6
Radiated emissions measured in restricted band 2483.5 –2500 MHz

Antenna Breezecom name: UNI-7
 Antenna MFR name: M/A –Com
 Detector used: Average

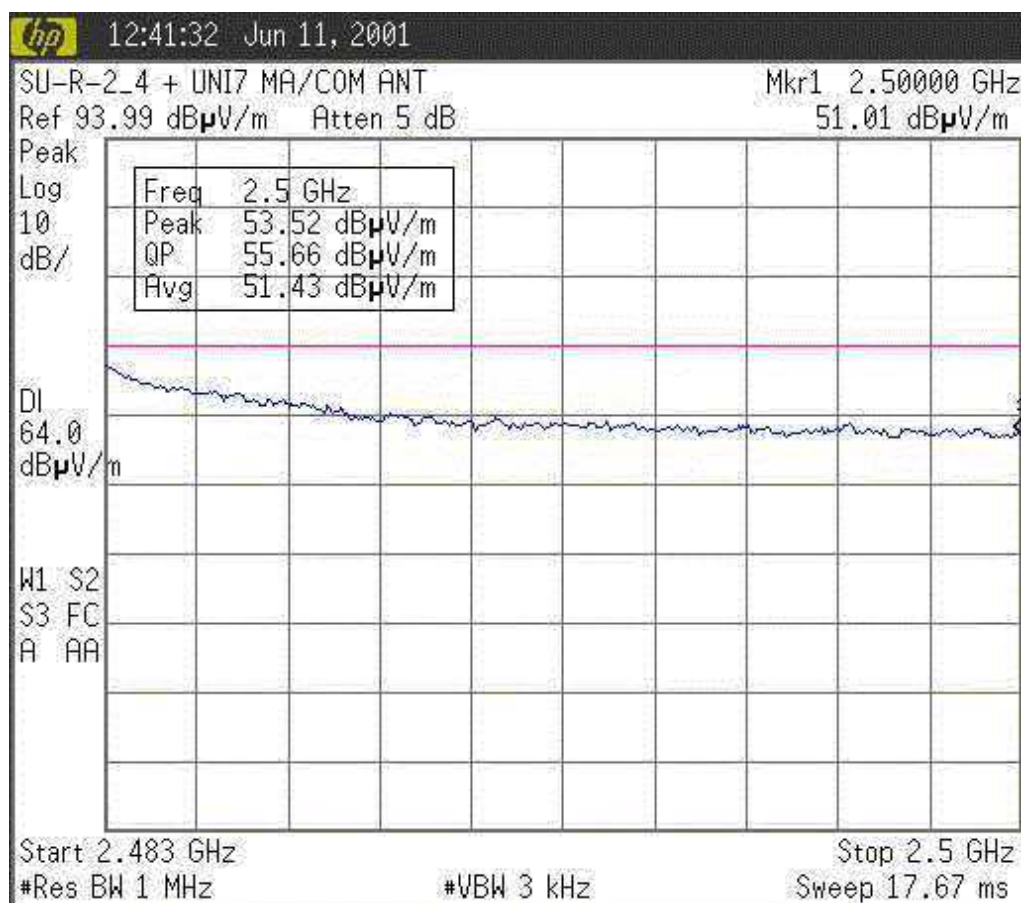




Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 21 of 40 Pages
Model: SU-R-2.4

Plot #7 Radiated emissions measured in restricted band 2483.5 –2500 MHz

Antenna Breezecom name: UNI-7
Antenna MFR name: M/A –Com
Detector used: Peak

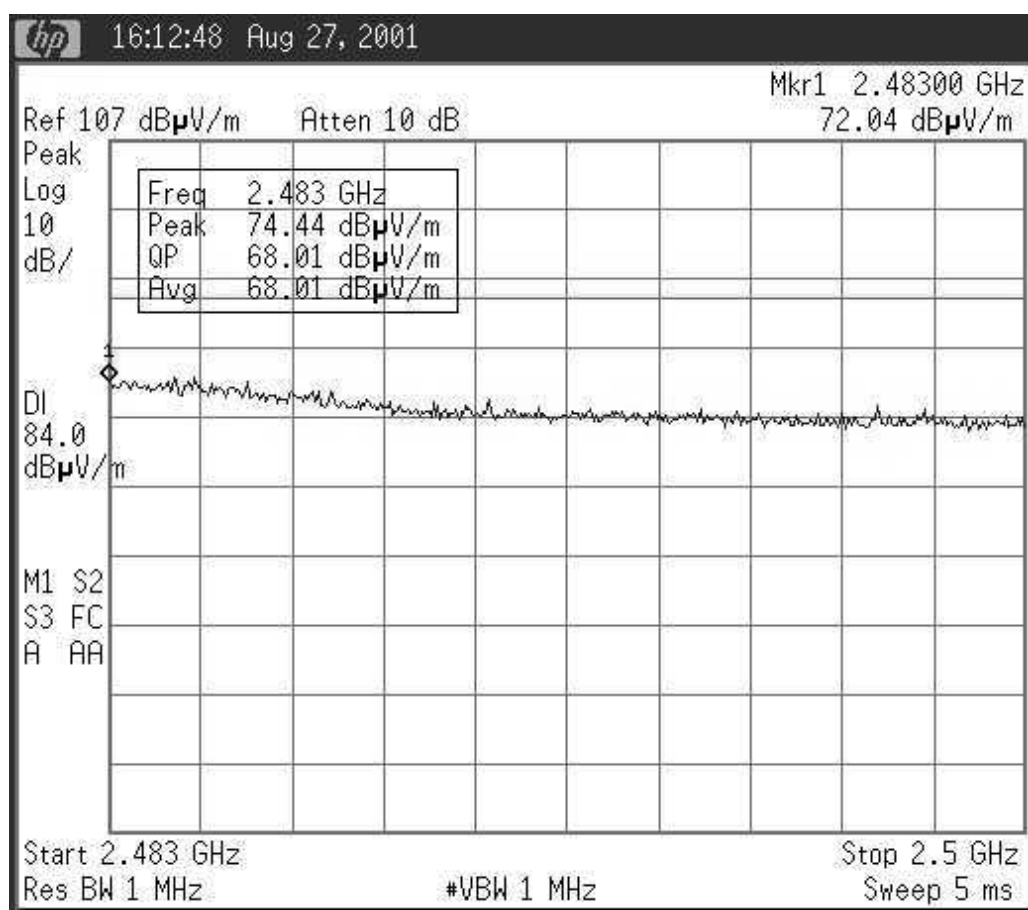




Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 22 of 40 Pages
Model: SU-R-2.4

Plot #8 Radiated emissions measured in restricted band 2310 –2390 MHz

Antenna Breezecom name: UNI-7
Antenna MFR name: M/A –Com
Detector used: Peak

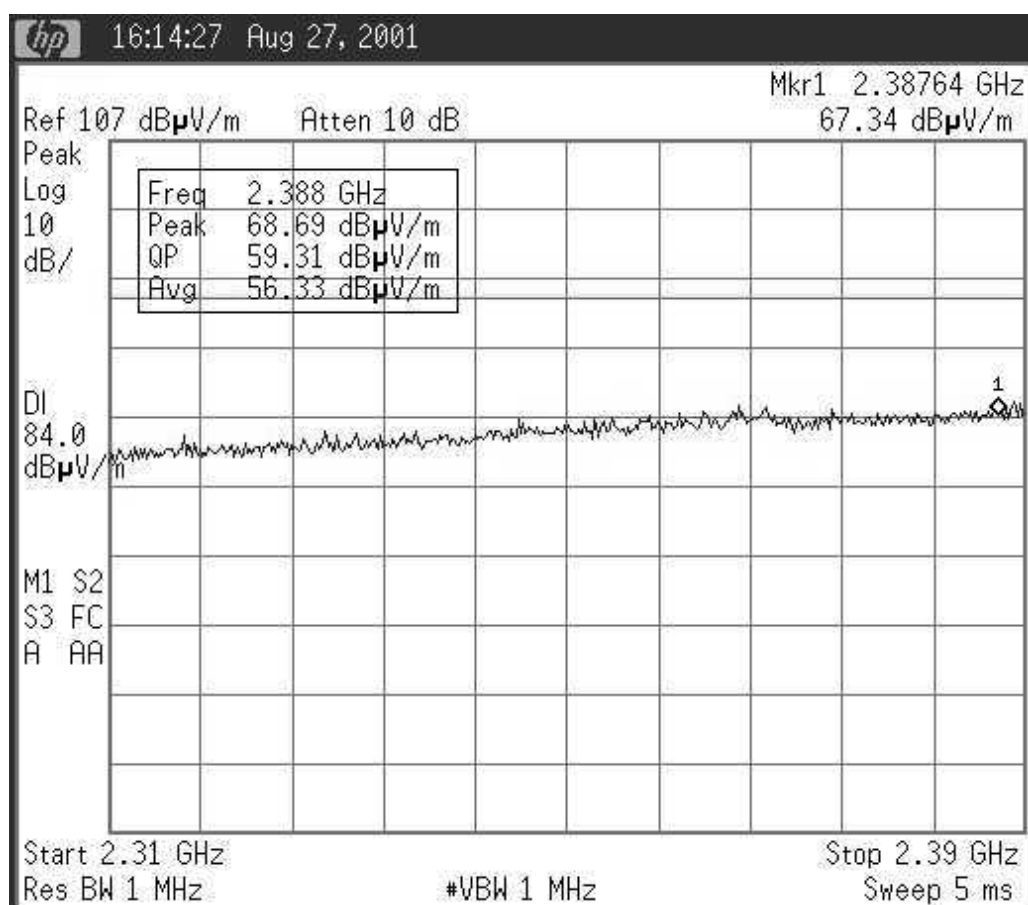




Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 23 of 40 Pages
Model: SU-R-2.4

Plot #9
Radiated emissions measured in restricted band 2483.5 –2500 MHz

Antenna Breezecom name: 2X Antenna OMNI-6dBi
 Antenna MFR name: NA
 Detector used: Average

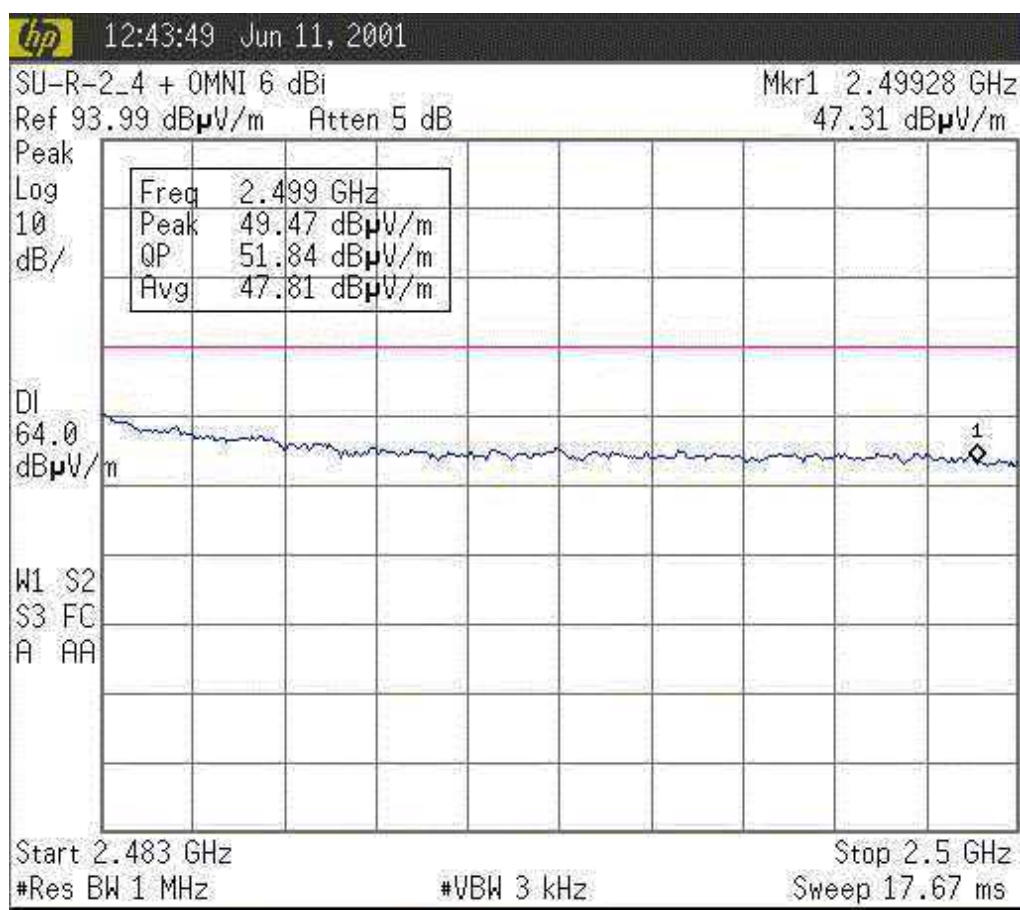




Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 24 of 40 Pages
Model: SU-R-2.4

Plot #10

Radiated emissions measured in restricted band 2310–2390 MHz

Antenna Breezecom name: 2X Antenna OMNI-6dBi
 Antenna MFR name: NA
 Detector used: Average

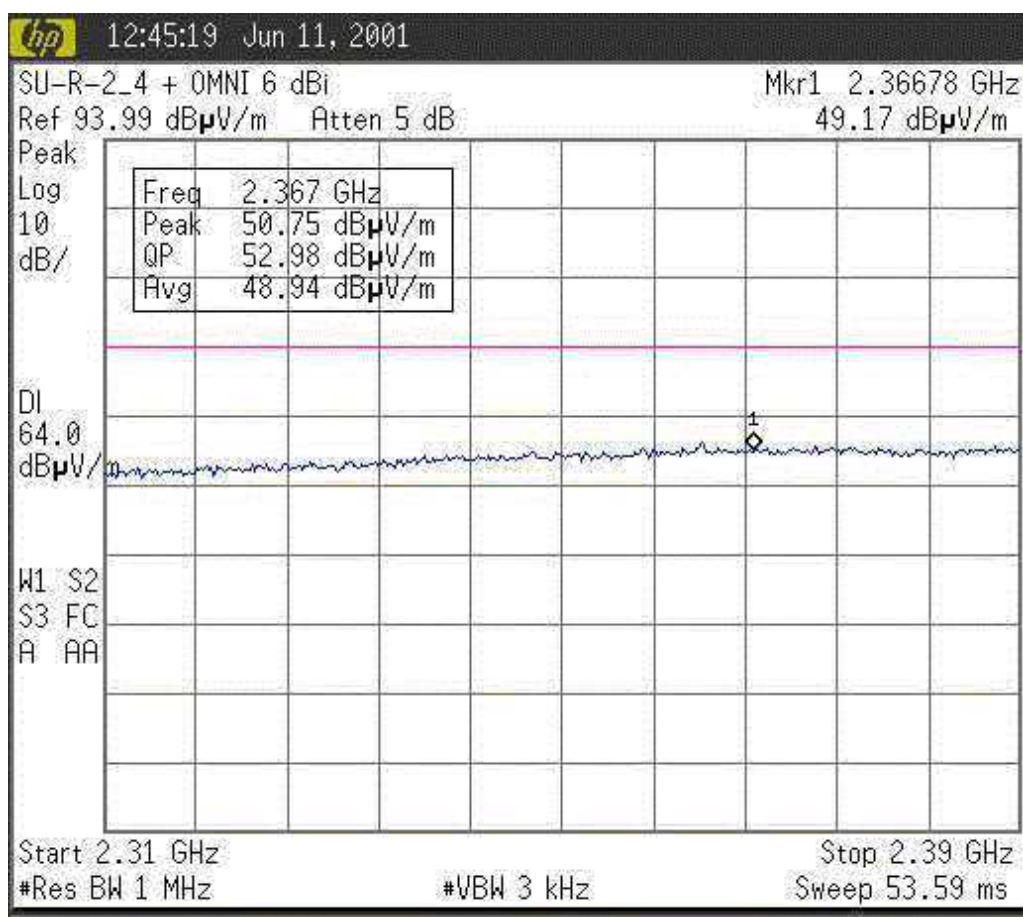




Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 25 of 40 Pages
Model: SU-R-2.4

Plot #11
Radiated emissions measured in restricted band 2310–2390 MHz

Antenna Breezecom name: 2X Antenna OMNI-6dBi
Antenna MFR name: NA
Detector used: Peak

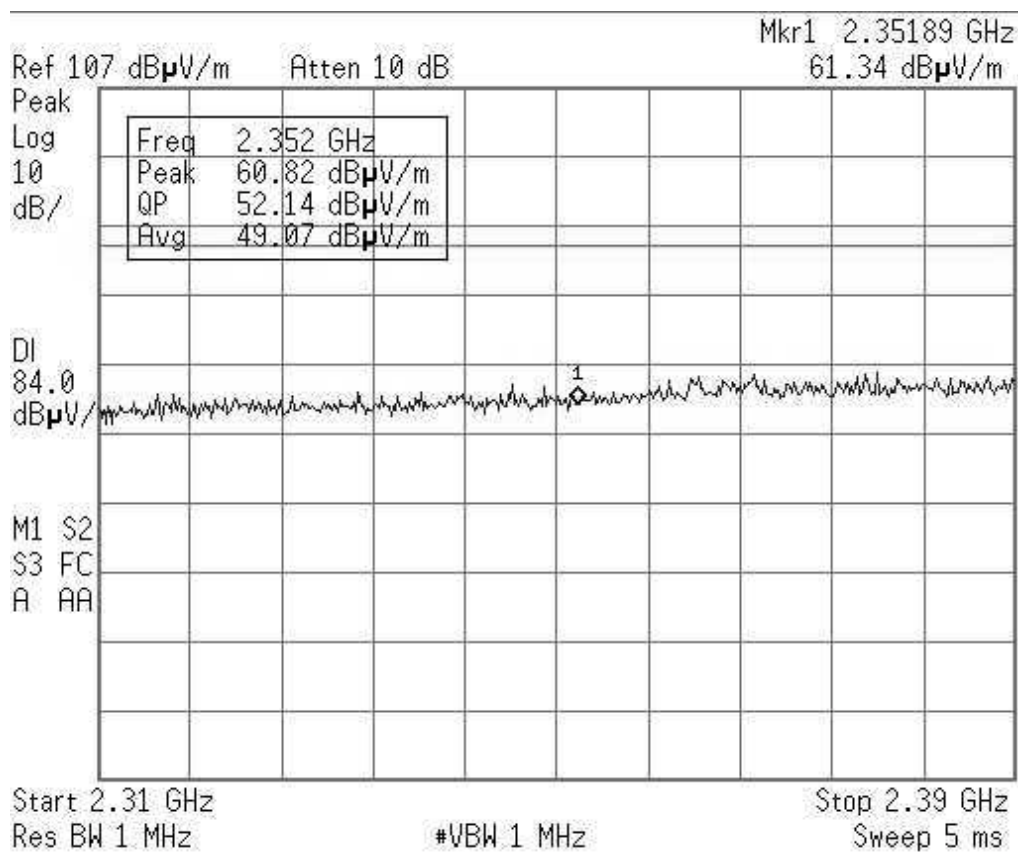




Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 26 of 40 Pages
Model: SU-R-2.4

Plot #12 Radiated emissions measured in restricted band 2483–2500 MHz

Antenna Breezecom name: 2X Antenna OMNI-6dBi
Antenna MFR name: NA
Detector used: Peak

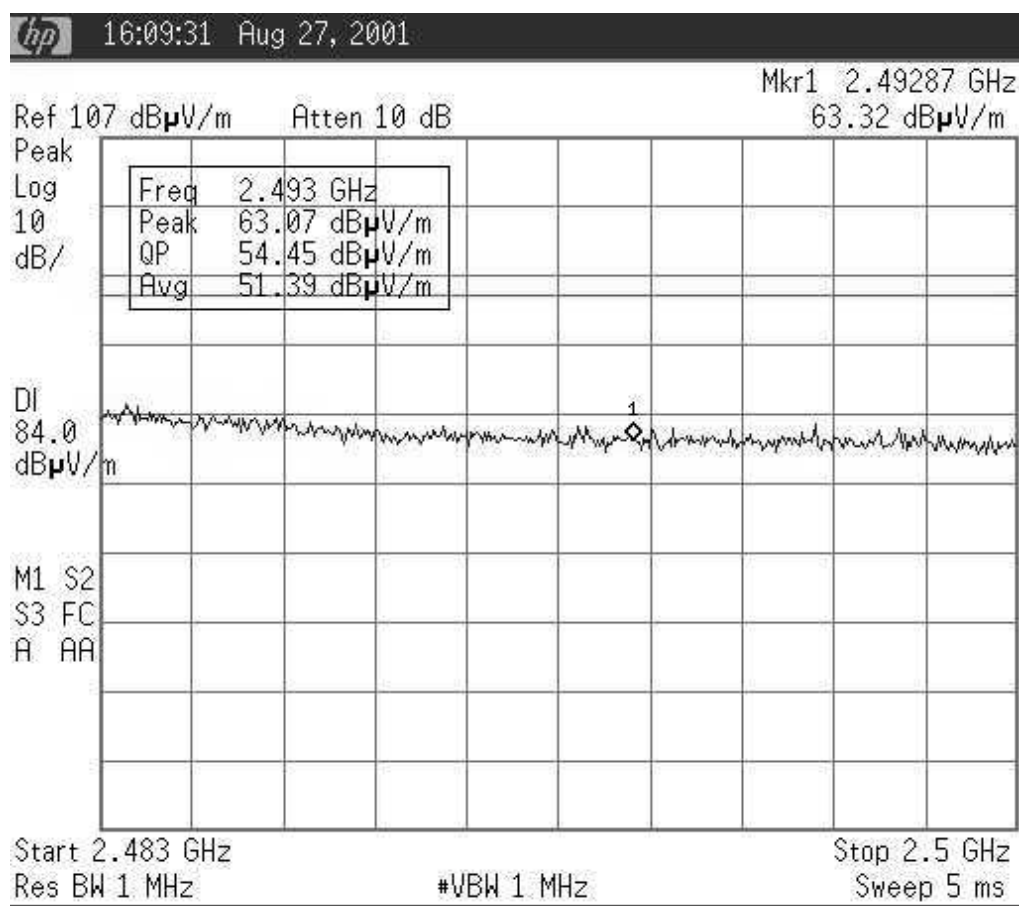



Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 27 of 40 Pages
Model: SU-R-2.4

4 Compliance with specification

Test	Standard	Test result
Spurious radiated emission Frequencies range from 4804 - 2800 MHz	FCC Part 15 Subpart C Sec.15.209	Complies
Radiated emissions in restricted bands	FCC Part 15 Subpart C Sec.15.205	Complies

Name: Eng. Yuri Rozenberg
Position: Head of EMC Branch

Telematics Laboratory
19 August, 2001

Name Maxim Reizin
Position: Test Technician



Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 28 of 40 Pages
Model: SU-R-2.4

5 Appendix 1: Test equipment used

All measurements equipment is on SII calibration schedule with a recalibration interval not exceeding once a year.

Instrument	Manufac-turer	Model	Serial No.	Last calibration date	Next calibration date
Spectrum analyze 10 KHz-26.5 GHz	HP	E7405a	SII 4944	04/01	04/02
Antenna Double Ridge 1-18 GHz	EMCO	3115	SII4873	03/01	03/02



Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 29 of 40 Pages
Model: SU-R-2.4

6 Appendix 2: Antenna Factor and Cable Loss

Cable Loss
Type: Sucoflex; Ser.No.21328/4PE; 4 m length

Point	Frequency (GHz)	Cable Loss (dB)
1	1.8 – 3.6	2.43
2	3.6 – 5.4	3.06
3	5.4-7.2	3.66
4	7.2-9.0	4.11
5	9.0-10.8	4.53
6	10.8-12.6	4.93
7	12.6-14.4	5.3
8	14.4-16.2	5.67
9	16.2-18.00	6.02

Antenna Factor
Double Ridged Guide Antenna mfr EMCO model 3115

Point	Frequency (MHz)	Antenna Factor (dB/m)
1	2000	27.4
2	2500	28.9
3	3000	31.0
4	4000	33.1
5	4500	32.5
6	5000	32.4
7	6000	53.7
8	6500	35.6
9	7000	36.4
10	7500	36.9
11	8000	37.0
12	8500	38.0
13	9000	38.6
14	9500	38.4
15	10000	38.4
16	10500	38.4
17	11000	38.9
18	11500	39.6
19	12000	39.4
20	12500	39.2
21	13000	40.3
22	13500	41.0
23	14000	41.2
24	14500	41.3
25	15000	40.0
26	15500	38.0
27	16000	38.1
28	16500	40.3
29	17000	42.2
30	17500	44.6
31	18000	46.2

Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 30 of 40 Pages
Model: SU-R-2.4

7 Appendix 3: Test configuration illustration

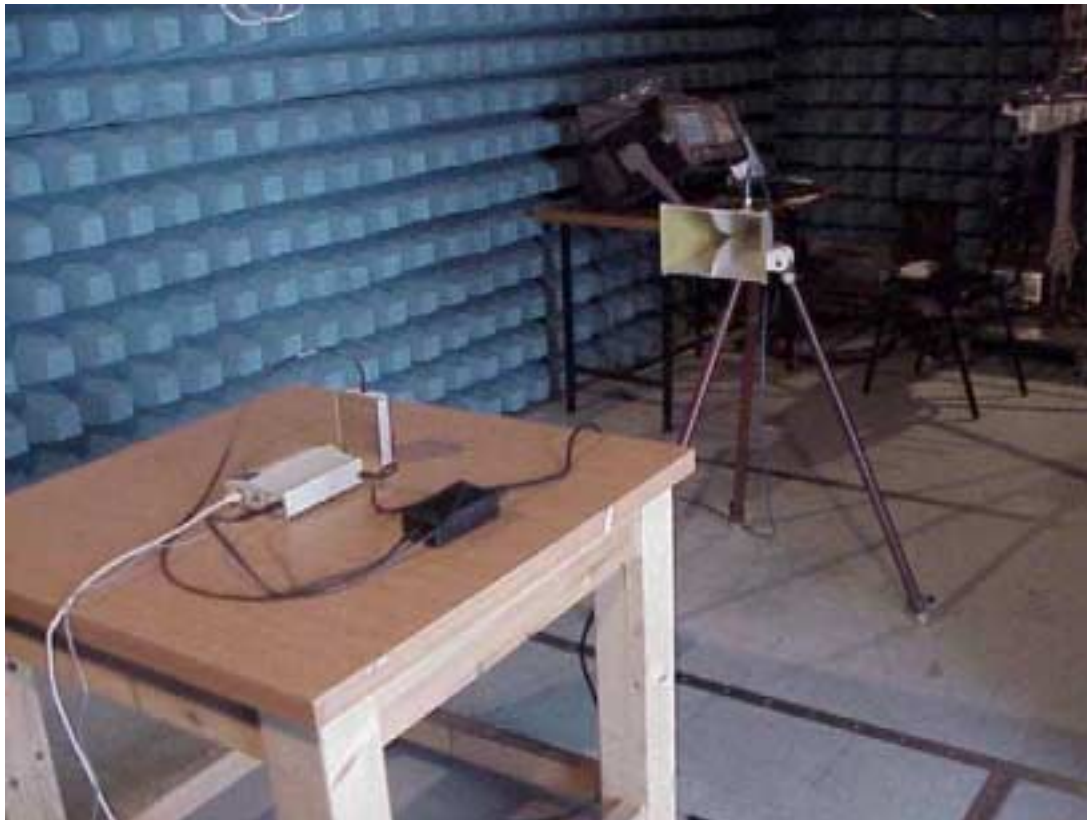


Photo #1. UNI-8.5 test configuration

Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 31 of 40 Pages
Model: SU-R-2.4

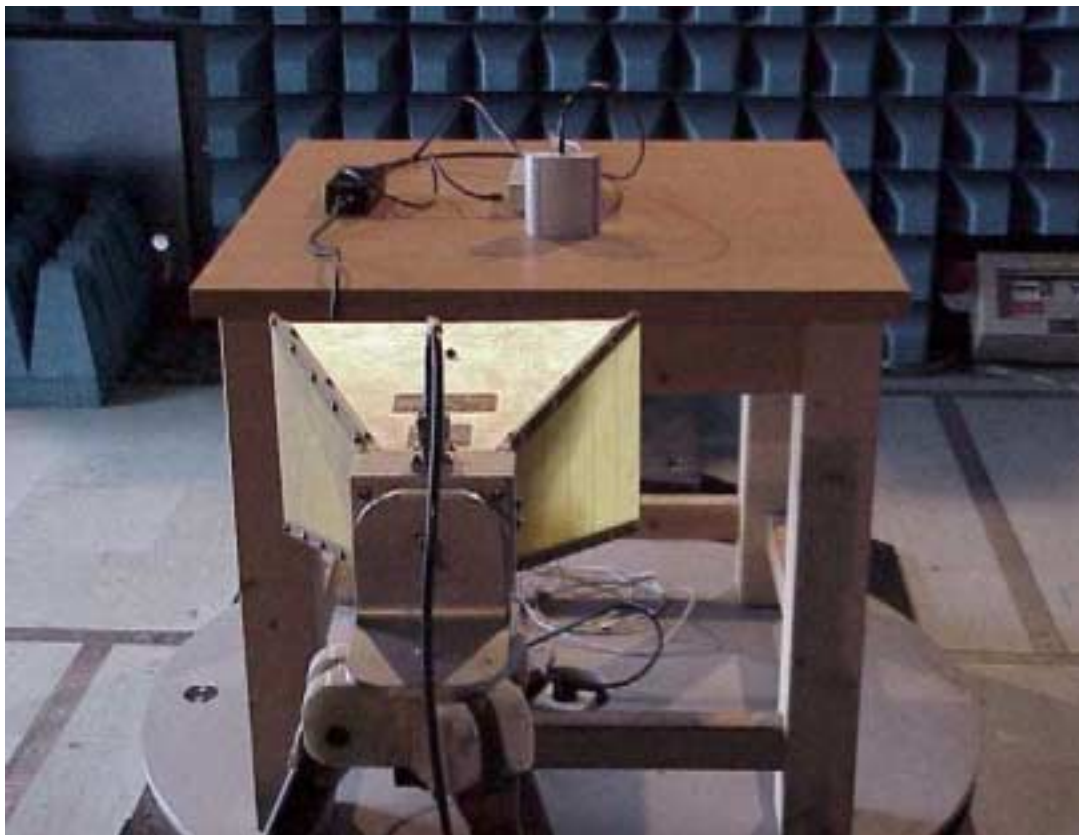


Photo #2. UNI-8.5 test configuration

Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 32 of 40 Pages
Model: SU-R-2.4



Photo #3 UNI-8.5 test configuration

Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 33 of 40 Pages
Model: SU-R-2.4

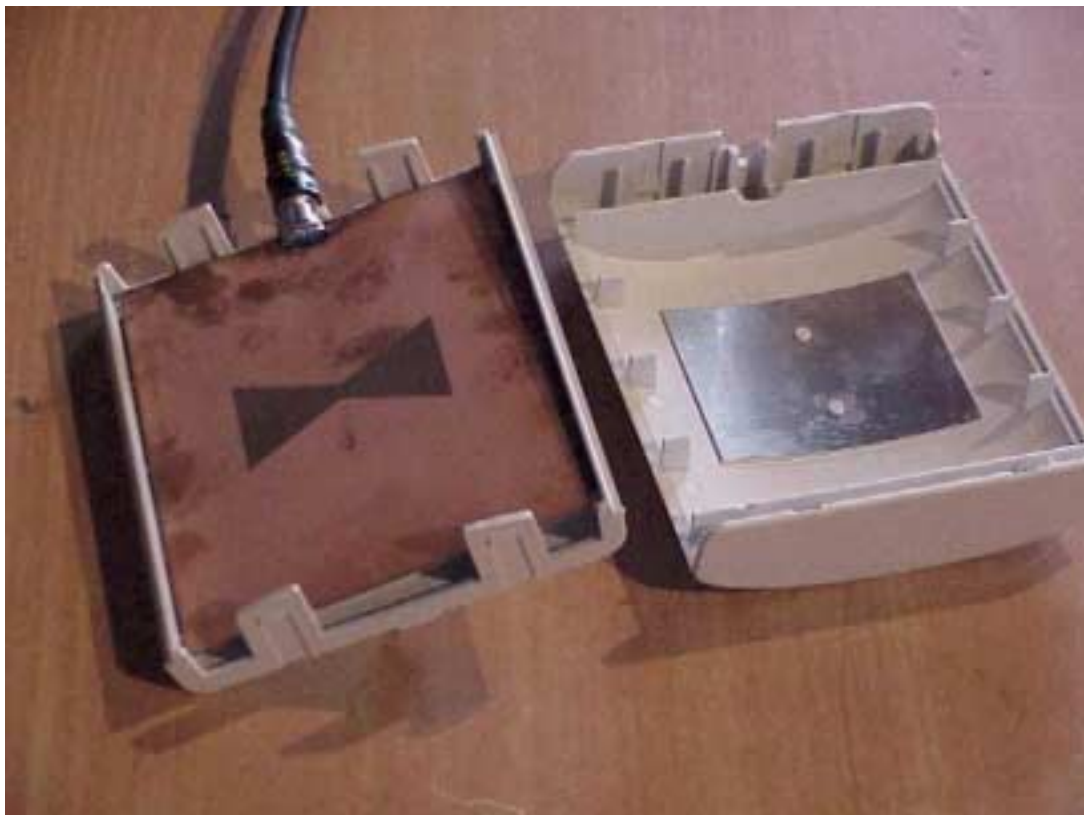


Photo #4 UNI-8.5 antenna

Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 34 of 40 Pages
Model: SU-R-2.4



Photo #5 UNI-8.5 antenna

Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 35 of 40 Pages
Model: SU-R-2.4



Photo #6 6dBi Omni antenna

Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 36 of 40 Pages
Model: SU-R-2.4



Photo #7 UNI-7 connector

Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 37 of 40 Pages
Model: SU-R-2.4

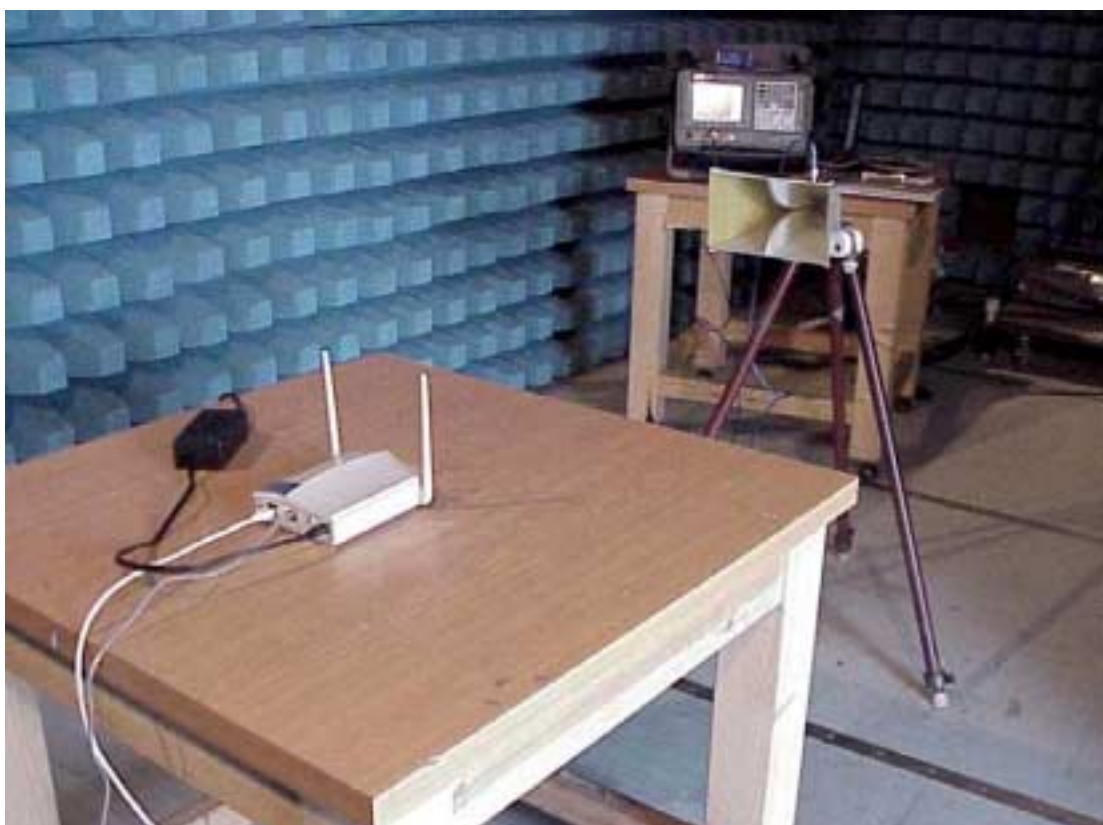


Photo #8 6dBi Omni antenna test configuration

Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 38 of 40 Pages
Model: SU-R-2.4

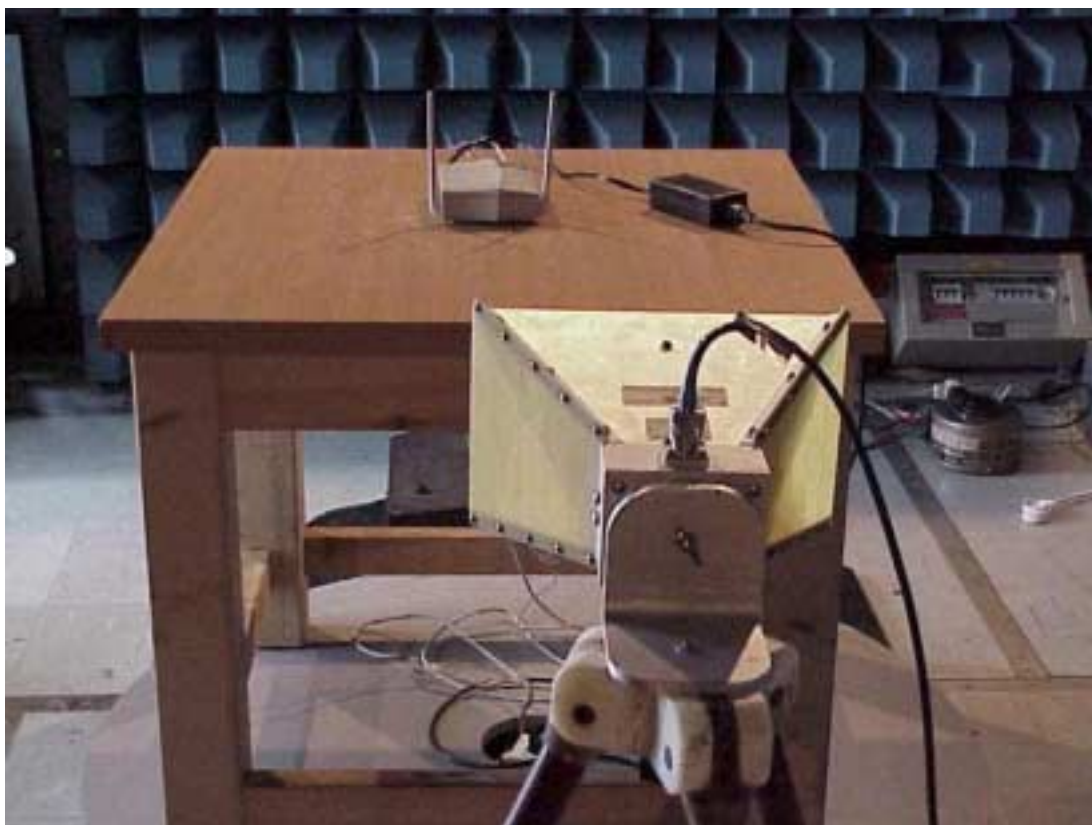


Photo #9 6dBi Omni antenna test configuration

Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 39 of 40 Pages
Model: SU-R-2.4



Photo #10 6dBi Omni antenna test configuration

Test Report No.: 8112309391 Rev.A
Title: Test on One Box 2.4 GHz Radio

Page 40 of 40 Pages
Model: SU-R-2.4



Photo #11 Uni-7 antenna