

SIEMENS

Approvals for SCALANCE
W780 / W740 802.11n

1

Approvals for SCALANCE
W788C / W786C 802.11n

2

Approvals for SCALANCE
W760 / W720 / W770 / W730
802.11n

3

SIMATIC NET

Industrial Wireless LAN
Approvals SCALANCE W700
802.11n

Reference Manual

10/2015

C79000-G8976-C392-03

Legal information

Warning notice system

This manual contains notices you have to observe in order to ensure your personal safety, as well as to prevent damage to property. The notices referring to your personal safety are highlighted in the manual by a safety alert symbol, notices referring only to property damage have no safety alert symbol. These notices shown below are graded according to the degree of danger.

DANGER

indicates that death or severe personal injury **will** result if proper precautions are not taken.

WARNING

indicates that death or severe personal injury **may** result if proper precautions are not taken.

CAUTION

indicates that minor personal injury can result if proper precautions are not taken.

NOTICE

indicates that property damage can result if proper precautions are not taken.

If more than one degree of danger is present, the warning notice representing the highest degree of danger will be used. A notice warning of injury to persons with a safety alert symbol may also include a warning relating to property damage.

Qualified Personnel

The product/system described in this documentation may be operated only by **personnel qualified** for the specific task in accordance with the relevant documentation, in particular its warning notices and safety instructions. Qualified personnel are those who, based on their training and experience, are capable of identifying risks and avoiding potential hazards when working with these products/systems.

Proper use of Siemens products

Note the following:

WARNING

Siemens products may only be used for the applications described in the catalog and in the relevant technical documentation. If products and components from other manufacturers are used, these must be recommended or approved by Siemens. Proper transport, storage, installation, assembly, commissioning, operation and maintenance are required to ensure that the products operate safely and without any problems. The permissible ambient conditions must be complied with. The information in the relevant documentation must be observed.

Trademarks

All names identified by ® are registered trademarks of Siemens AG. The remaining trademarks in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owner.

Disclaimer of Liability

We have reviewed the contents of this publication to ensure consistency with the hardware and software described. Since variance cannot be precluded entirely, we cannot guarantee full consistency. However, the information in this publication is reviewed regularly and any necessary corrections are included in subsequent editions.

Table of contents

1	Approvals for SCALANCE W780 / W740 802.11n	5
1.1	General approvals.....	7
1.2	National approvals	21
2	Approvals for SCALANCE W788C / W786C 802.11n	37
2.1	General approvals.....	38
2.2	National approvals	50
3	Approvals for SCALANCE W760 / W720 / W770 / W730 802.11n	67
3.1	General approvals.....	68
3.2	National approvals	78
	Index.....	91

Approvals for SCALANCE W780 / W740 802.11n

Note

Issued approvals on the type plate of the device

The specified approvals apply only when the corresponding mark is printed on the product. You can check which of the following approvals have been granted for your product by the markings on the type plate.

Range of validity

The approvals listed in this section apply to the following products:

	Article number of the RoW version:	Article number of the US version:
Access point		
SCALANCE W786-1 RJ-45	6GK5 786-1FC00-0AA0	6GK5 786-1FC00-0AB0
Dual access points		
SCALANCE W786-2 RJ-45	6GK5 786-2FC00-0AA0	6GK5 786-2FC00-0AB0
SCALANCE W786-2IA RJ-45	6GK5 786-2HC00-0AA0	6GK5 786-2HC00-0AB0
SCALANCE W786-2 SFP	6GK5 786-2FE00-0AA0	6GK5 786-2FE00-0AB0

	Article number of the RoW version:	Article number of the US version:
Access points		
SCALANCE W788-1 RJ-45	6GK5788-1FC00-0AA0	6GK5788-1FC00-0AB0
SCALANCE W788-1 M12	6GK5788-1GD00-0AA0	6GK5788-1GD00-0AB0
Dual access points		
SCALANCE W788-2 RJ-45	6GK5788-2FC00-0AA0	6GK5788-2FC00-0AB0
SCALANCE W788-2 M12	6GK5788-2GD00-0AA0	6GK5788-2GD00-0AB0
SCALANCE W788-2 M12 EEC	6GK5788-2GD00-0TA0	6GK5788-2GD00-0TB0
Ethernet client modules		
SCALANCE W748-1 RJ-45	6GK5748-1FC00-0AA0	6GK5748-1FC00-0AB0
SCALANCE W748-1 M12	6GK5748-1GD00-0AA0	6GK5748-1GD00-0AB0

Abbreviations used

Some approvals apply only to certain devices or series. In such situations, the designations of the products are shortened to avoid having to list all the type designations. The following table shows how the abbreviations relate to the product variants.

Product group	The designation . . . stands for . . .	Product name
Access points (IP30 and IP65)	W788-x	SCALANCE W788-1 M12 SCALANCE W788-2 M12 SCALANCE W788-2 M12 EEC SCALANCE W788-1 RJ-45 SCALANCE W788-2 RJ-45
Access points (IP65)	W786-x	SCALANCE W786-1 RJ-45 SCALANCE W786-2 RJ-45 SCALANCE W786-2IA RJ-45 SCALANCE W786-2 SFP
SCALANCE W without W786-x	W7x8	SCALANCE W788-1 RJ-45 SCALANCE W788-1 M12 SCALANCE W788-2 RJ-45 SCALANCE W788-2 M12 SCALANCE W788-2 M12 EEC SCALANCE W748-1 RJ-45 SCALANCE W748-1 M12

1.1 General approvals

CE conformity

The products

SIMATIC NET SCALANCE W786-1 RJ45
SIMATIC NET SCALANCE W786-2 RJ45
SIMATIC NET SCALANCE W786-2IA RJ45
SIMATIC NET SCALANCE W786-2 SFP

SIMATIC NET SCALANCE W788-1 RJ-45
SIMATIC NET SCALANCE W788-2 RJ-45
SIMATIC NET SCALANCE W788-1 M12
SIMATIC NET SCALANCE W788-2 M12
SIMATIC NET SCALANCE W748-2 M12 EEC
SIMATIC NET SCALANCE W748-1 RJ-45
SIMATIC NET SCALANCE W748-1 M12

in the version put into circulation by Siemens AG conform to the regulations of the following European directive:

- 99/5/EC
Directive of the European Parliament and of the Council on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity. Conformity with the basic requirement of the directive is attested by adherence to the following standards:
- EN 60950-1 +A1 + A2 + A11 + A12
Information technology equipment - Safety - Part 1: General requirements
- EN 301489-1 V1.9.2
Electromagnetic compatibility and radio spectrum matters (ERM) - Electromagnetic compatibility for radio equipment and services - Part 1 : Common technical requirements (V1.9.2).
- EN 301489-17 V2.2.1
Electromagnetic compatibility and radio spectrum matters (ERM) - Electromagnetic compatibility for radio equipment and services - Part 17: Specific conditions for 2.4 GHz broadband transmission systems and 5 GHz high performance RLAN equipment
- EN 300328 V1.8.1
Electromagnetic Compatibility and Radio Spectrum Matters (ERM); — Broadband transmission systems — Data transmission equipment operating in the 2.4 GHz ISM band and using spread spectrum modulation techniques — Harmonized EN covering essential requirements under article 3.2 of the R&TTE Directive
- EN 301893 V1.7.1
Broadband Radio Access Networks (BRAN) - 5 GHz high performance RLAN - Harmonized EN covering essential requirements of article 3.2 of the R&TTE Directive

1.1 General approvals

- EN 62311
Assessment of electronic and electrical equipment related to human exposure restrictions for electro-magnetic fields (0 Hz – 300 GHz)
- 1999/519/EC
Council recommendation on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz)

Devices connected to the system must meet the relevant safety regulations.

The EC Declaration of Conformity is available for the responsible authorities according to the above-mentioned EC Directive at the following address:

Siemens Aktiengesellschaft
Division Process Industries and Drives
Postfach 4848
D-90026 Nürnberg

This declaration certifies compliance with the directives named above, but does not guarantee any specific properties.

Note

The specified approvals apply only when the corresponding mark is printed on the product.

Certification ID

The following tables show the product names and the corresponding certification ID:

Type	Number and type of the Ethernet interfaces	Number of internal antennas	Number of R-SMA sockets for external antennas	Certification ID Order number Order number US variant
W786-1 RJ-45	1 x RJ-45	-	3	EAPN-W1-RJ-E3 6GK5 786-1FC00-0AA0 6GK5 786-1FC00-0AB0
W786-2 RJ-45	1 x RJ-45	-	6	EAPN-W2-RJ-E3 6GK5 786-2FC00-0AA0 6GK5 786-2FC00-0AB0
W786-2IA RJ-45	1 x RJ-45	2	-	EAPN-W2-RJ-I3 6GK5 786-2HC00-0AA0 6GK5 786-2HC00-0AB0
W786-2 SFP	2 x SFP	-	6	EAPN-W2-SFP-E3 6GK5 786-2FE00-0AA0 6GK5 786-2FE00-0AB0

Type	Certification ID
	Order number:
	Order number US variant:
W788-1 RJ-45	RAPN-W1-RJ-E3 6GK 5788-1FC00-0AA0 6GK 5788-1FC00-0AB0
W788-2 RJ-45	RAPN-W2-RJ-E3 6GK5 788-2FC00-0AA0 6GK5 788-2FC00-0AB0
W788-1 M12	RAPN-W1-M12-E3 6GK5 788-1GD00-0AA0 6GK5 788-1GD00-0AB0
W788-2 M12	RAPN-W2-M12-E3 6GK5 788-2GD00-0AA0 6GK5 788-2GD00-0AB0
W788-2 M12 EEC	RAPN-W2-M12-E3 6GK5 788-2GD00-0TA0 6GK5 788-2GD00-0TB0
W748-1 RJ-45	RAPN-W1-RJ-E3 6GK5 748-1FC00-0AA0 6GK5 748-1FC00-0AB0
W748-1 M12	RAPN-W1-M12-E3 6GK5 748-1GD00-0AA0 6GK5 748-1GD00-0AB0

1.1 General approvals



Konformitätserklärung / Declaration of Conformity

Hersteller/Verantwortlicher:
Manufacturer/Responsible Person Alfred Hümmer

Anschrift:
Address Siemens Aktiengesellschaft
PD PA CI
Gleichwitzer Str. 555
D-90475 Nuremberg
Bundesrepublik Deutschland

Produkt/Product:
Typ/Type:
Modell/Model: Industrial WLAN Access Point EAPN Family
**EAPN-W1-RJ-E3,
EAPN-W2-RJ-E3,
EAPN-W2-RJ-I3,
EAPN-W2-SFP-E3**

Einsatzzweck/Intended Use: Wireless Communication

Das bezeichnete Produkt (Modell) entspricht in der gelieferten Ausführung den Bestimmungen der EU-Richtlinie 1999/5/EG, RICHTLINIE DES EUROPÄISCHEN PARLAMENTS UND DES RATES vom 9. März 1999 über Funkanlagen und Telekommunikationsendeinrichtungen und die gegenseitige Anerkennung ihrer Konformität

Die Übereinstimmung des bezeichneten Produkts (Modell) mit den Vorschriften der angewandten Richtlinie(n) wird nachgewiesen durch die vollständige Einhaltung folgender Normen / Vorschriften:


The designated product (model) as delivered is in conformity with the provisions of the EU-Directive 1999/5/EC DIRECTIVE OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity

The conformity of the designated product (model) with the provisions of the applied Directive(s) is proved by full compliance with the following standards / regulations:

Art. 3 (1) a) Schutz der Gesundheit und Sicherheit Harmonisierte Normen / Health and Safety - Harmonised standards:			
Referenznummer <i>Reference number</i>	Version / Ausgabedatum <i>Version / Date of issue</i>	Referenznummer <i>Reference number</i>	Version / Ausgabedatum <i>Version / Date of issue</i>
EN 60950-1+A1+A2+A11+A12	2006/2010/2013/2009/2011	EN 62311	2008
		1999/519/EC	
Art. 3 (1) b) EMV Harmonisierte Normen / EMC Harmonised standards:			
Referenznummer <i>Reference number</i>	Version / Ausgabedatum <i>Version / Date of issue</i>	Referenznummer <i>Reference number</i>	Version / Ausgabedatum <i>Version / Date of issue</i>
ETSI EN 301 489-1	V1.9.2	ETSI EN 301 489-17	V2.2.1
Art. 3 (2) Effiziente Nutzung des Funkspektrums Harmonisierte Normen / Efficient usage of spectrum Harmonised standards:			
Referenznummer <i>Reference number</i>	Version / Ausgabedatum <i>Version / Date of issue</i>	Referenznummer <i>Reference number</i>	Version / Ausgabedatum <i>Version / Date of issue</i>
ETSI EN 300 328	V1.8.1	ETSI EN 301 893	V1.7.1

Siemens Aktiengesellschaft

Karlsruhe, den / the 15.10.2014
Ort / place of issue Datum / Date of issue

Groetschel, i.V. 
Name / name Unterschrift / signature

Leiter Qualitätsmanagement / Quality Manager, MF-K
Funktion / function

Diese Erklärung bescheinigt die Übereinstimmung mit den genannten Richtlinien, ist jedoch keine Beschaffenheits- oder Haltbarkeitsgarantie. Die Sicherheitshinweise der mitgelieferten Produktdokumentation sind zu beachten.

Siemens Aktiengesellschaft, Chairman of the Supervisory Board: Gerhard Cromme; Managing Board: Joe Kaeser, Chairman, President and Chief Executive Officer; Roland Busch, Lisa Davis, Klaus Helmrich, Hermann Requardt, Siegfried Russwurm, Ralf P. Thomas; Registered offices: Berlin and Munich, Germany; Commercial registries: Berlin Charlottenburg, HRB 12300, Munich, HRB 6684; WEEE-Reg.-No. DE 23691322

Huemmer, i.V. 
Name / name Unterschrift / signature

Leiter Entwicklung / Vice President R&D, PD PA CI R&D
Funktion / function

This declaration certifies the compliance with the indicated directives but does not imply any warranty for properties. The safety instructions of the accompanying product documentation shall be observed.



Konformitätserklärung / Declaration of Conformity

Hersteller/Verantwortlicher: Alfred Hümmel
 Manufacturer/Responsible Person

Anschrift:
 Address Siemens Aktiengesellschaft
 PD PA CI
 Gleichwitzer Str. 555
 D-90475 Nuremberg
 Bundesrepublik Deutschland

Produkt/Product:
 Typ/Type: Industrial WLAN Access Point EAPN Family
 Modell/Model: **RAPN-W1-RJ-E3,
 RAPN-W2-RJ-E3,
 RAPN-W1-M12-E3,
 RAPN-W2-M12-E3**

Einsatzzweck/Intended Use: Wireless Communication

Das bezeichnete Produkt (Modell) entspricht in der gelieferten Ausführung den Bestimmungen der EU-Richtlinie 1999/5/EG, RICHTLINIE DES EUROPÄISCHEN PARLAMENTS UND DES RATES vom 9. März 1999 über Funkanlagen und Telekommunikationsendeinrichtungen und die gegenseitige Anerkennung ihrer Konformität

Die Übereinstimmung des bezeichneten Produkts (Modell) mit den Vorschriften der angewandten Richtlinie(n) wird nachgewiesen durch die vollständige Einhaltung folgender Normen / Vorschriften:

The designated product (model) as delivered is in conformity with the provisions of the EU-Directive 1999/5/EC DIRECTIVE OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity

The conformity of the designated product (model) with the provisions of the applied Directive(s) is proved by full compliance with the following standards / regulations:


Art. 3 (1) a) Schutz der Gesundheit und Sicherheit Harmonisierte Normen / Health and Safety - Harmonised standards:			
Referenznummer Reference number	Version / Ausgabedatum Version / Date of issue	Referenznummer Reference number	Version / Ausgabedatum Version / Date of issue
EN 60950-1+A1+A2+A11+A12	2006/2010/2013/2009/2011	EN 62311	2008
		1999/519/EC	

Art. 3 (1) b) EMV Harmonisierte Normen / EMC Harmonised standards:			
Referenznummer Reference number	Version / Ausgabedatum Version / Date of issue	Referenznummer Reference number	Version / Ausgabedatum Version / Date of issue
ETSI EN 301 489-1	V1.9.2	ETSI EN 301 489-17	V2.2.1

Art. 3 (2) Effiziente Nutzung des Funkspektrums Harmonisierte Normen / Efficient usage of spectrum Harmonised standards:			
Referenznummer Reference number	Version / Ausgabedatum Version / Date of issue	Referenznummer Reference number	Version / Ausgabedatum Version / Date of issue
ETSI EN 300 328	V1.8.1	ETSI EN 301 893	V1.7.1

Siemens Aktiengesellschaft


Karlsruhe, den / the 15.10.2014
 Ort / place of issue Datum / Date of issue

Groetschel, i.V. 
 Name / name Unterschrift / signature

Leiter Qualitätsmanagement / Quality Manager, MF-K
 Funktion / function

Diese Erklärung bescheinigt die Übereinstimmung mit den genannten Richtlinien, ist jedoch keine Beschaffenheits- oder Haltbarkeitsgarantie. Die Sicherheitshinweise der mitgelieferten Produktdokumentation sind zu beachten.

Siemens Aktiengesellschaft: Chairman of the Supervisory Board: Gerhard Cromme; Managing Board: Joe Kaeser, Chairman, President and Chief Executive Officer; Roland Busch, Lisa Davis, Klaus Helmrich, Hermann Requardt, Siegfried Russwurm, Ralf P. Thomas; Registered offices: Berlin and Munich, Germany; Commercial registries: Berlin Charlottenburg, HRB 12300, Munich, HRB 6684; WEEE-Reg.-No. DE 23691322

Huemmer, i.V. 
 Name / name Unterschrift / signature

Leiter Entwicklung / Vice President R&D, PD PA CI R&D
 Funktion / function

This declaration certifies the compliance with the indicated directives but does not imply any warranty for properties. The safety instructions of the accompanying product documentation shall be observed.

ATEX (explosion protection directive)

WARNING

When using SIMATIC NET products in hazardous area zone 2, make absolutely sure that the associated conditions in the following document are adhered to:

"SIMATIC NET Product Information Use of subassemblies/modules in a Zone 2 Hazardous Area".

You will find this document

- on the data medium that ships with some devices.
- on the Internet pages of Siemens Industry Online Support (<http://support.automation.siemens.com/ww>).

Enter the document identification number C234 as the search term.

SIMATIC NET products meet the requirements of the EC directive:94/9/EC "Equipment and Protective Devices for Use in Potentially Explosive Atmospheres".

ATEX classification:

II 3 G Ex nA IIC T4 Gc

KEMA 07ATEX0145 X

The products meet the requirements of the following standards:

- EN 60079-15 (electrical apparatus for potentially explosive atmospheres; Type of protection "n")
- EN 60079-0 (Explosive atmospheres - Part 0: Equipment - General requirements)

You will find the current versions of the standards in the currently valid ATEX certificates.

IECEx

The SIMATIC NET products meet the requirements of explosion protection according to IECEx.

IECEx classification:

Ex nA IIC T4 Gc

DEK 14.0025X

The products meet the requirements of the following standards:

- IEC 60079-15 (Explosive atmospheres - Part 15: Equipment protection by type of protection "n")
- IEC 60079-0 (Explosive atmospheres - Part 0: Equipment - General requirements)

You will find the current versions of the standards in the currently valid IECEx certificates.

FM

The product meets the requirements of the standards:

- Factory Mutual Approval Standard Class Number 3611
- FM Hazardous (Classified) Location Electrical Equipment:
Non Incendive / Class I / Division 2 / Groups A,B,C,D / T4 and
Non Incendive / Class I / Zone 2 / Group IIC / T4

cULus Approval for Information Technology Equipment

cULus Listed I. T. E.

Underwriters Laboratories Inc. complying with

- UL 60950-1 (Information Technology Equipment)
- CSA C22.2 No. 60950-1-03

Report no. E115352

Note

Only devices of the SCALANCE W786-x series have this approval.

cULus Approval Hazardous Location

cULus Listed I. T. E. FOR HAZ. LOC.

Underwriters Laboratories Inc. complying with

- UL 60950-1 (Information Technology Equipment)
- ANSI/ISA 12.12.01-2007
- CSA C22.2 No. 213-M1987

Approved for use in

Cl. 1, Div. 2, GP A, B, C, D T4

Cl. 1, Zone 2, GP IIC T4

Report no. E240480

FCC approval

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Notice

Changes or modifications made to this equipment not expressly approved by SIEMENS may void the FCC authorization to operate this equipment.

IEEE 802.11b or g operation of this product in the USA is firmware-limited to channels 1 through 11.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.
-

Notice

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. Professional Installation Notice:

To comply with FCC part 15 rules in the United States, the system must be professionally installed to ensure compliance with the Part 15 certification. It is the responsibility of the operator and professional installer to ensure that only certified systems are deployed in the United States. The use of the system in any other combination (such as co-located antennas transmitting the same information) is expressly forbidden.

Notice**For use of DFS channels**

- Use of the RCoax Cable Antenna 6XV1875-2D is not permitted in channels which require dynamic frequency selection (DFS).
- Any installation of either a master or a client device within 35 km of a TDWR (Terminal Doppler Weather Radar) location shall be separated by at least 30 MHz (center-to-center) from the TDWR operating frequency.
These devices shall be registered in the industry sponsored WISPA database,

<http://udia.spectrumbridge.com/udia/home.aspx>
<http://udia.spectrumbridge.com/udia/home.aspx>

When you open this link, you get the following choices:

- "Search" opens a window with TDWR locations and frequencies.
- "User Signup" allows you to register as user of the database.
- After registering you can Logon and register your WLAN location. Please fill in all required information.

For more information with respect to WISPA database and TWDR locations please consult FCC publication KDB 443999 D01.

NEMA TS2

The product meets the requirements of the standard

NEMA TS2 (Traffic Controller Assemblies with NTCIP Requirements)

SCALANCE W788-2 M12 EEC

6GK5788-2GD00-0TA0

6GK5788-2GD00-0TB0

RSS-247 of Industry Canada for SCALANCE W786-x

This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

This radio transmitter (IC: 267AA-MPCIE1V1) has been approved by Industry Canada to operate with the antenna types listed in section 6.8 with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

1.1 General approvals

To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that permitted for successful communication.

That the device for the band 5150-5250 MHz is only for indoor usage to reduce potential for harmful interference to co-channel mobile satellite systems.

Users should also be cautioned to take note that high power radars are allocated as primary users (meaning they have priority) of 5250-5350 MHz and 5650-5850 MHz and these radars could cause interference and/or damage to LE-LAN devices.

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

RSS-247 of Industry Canada for SCALANCE W7x8

This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

This radio transmitter (IC: 267AA-MPCIE1V1) has been approved by Industry Canada to operate with the antenna types listed in section 5.4 with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that permitted for successful communication.

That the device for the band 5150-5250 MHz is only for indoor usage to reduce potential for harmful interference to co-channel mobile satellite systems.

Users should also be cautioned to take note that high power radars are allocated as primary users (meaning they have priority) of 5250-5350 MHz and 5650-5850 MHz and these radars could cause interference and/or damage to LE-LAN devices.

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Note for USA, Canada, Puerto Rico, Peru, Bahamas, Ecuador and Columbia

When operating the SCALANCE W700 with DFS (Dynamic Frequency Selection), the IWLAN RCoax Cable 5 GHz (order number 6XV1875-2D) may not be used in the countries listed above.

Approvals in Argentina

Devices of the SCALANCE W786-x series are approved in Argentina under the following certification numbers:

Certification ID	Certification number
EAPN-W1-RJ-E3	CNC: C-11549
EAPN-W2-RJ-E3	CNC: C-11536
EAPN-W2-RJ-I3	CNC: C-11564
EAPN-W2-SFP-E3	CNC: C-11547

Devices of the SCALANCE W788-x series are approved in Argentina under the following certification numbers:

Certification ID	Certification number
RAPN-W1-RJ-E3	CNC: C-11541
RAPN-W2-RJ-E3	CNC: C-11502
RAPN-W1-M12-E3	CNC: C-11546
RAPN-W2-M12-E3	CNC: C-11548

Approval in Brazil

From the SCALANCE W786-x series, the following devices are approved for Brazil:

Type	Order number	EAPN number
W786-1 RJ-45	6GK5 786-1FC00-0AA0	EAPN-W1-RJ-E3
W786-2 RJ-45	6GK5 786-2FC00-0AA0	EAPN-W2-RJ-E3
W786C-2 RJ-45	6GK5 786-2FC00-1AA0	EAPN-W2-RJ-E3
W786-2IA RJ-45	6GK5 786-2HC00-0AA0	EAPN-W2-RJ-I3
W786C-2IA RJ-45	6GK5 786-2HC00-1AA0	EAPN-W2-RJ-I3
W786-2 SFP	6GK5 786-2FE00-0AA0	EAPN-W2-SFP-E3

The listed devices are approved in Brazil under the following certification numbers:

1.1 General approvals



Este equipamento opera em caráter secundário, isto é, não tem direito à proteção contra interferência prejudicial, mesmo de estações do mesmo tipo e não pode causar interferência a sistemas operando em caráter primário.

From the SCALANCE W7x8 series, the following devices are approved for Brazil:

Type	Order number	RAPN number
W788-1 RJ-45	6GK 5788-1FC00-0AA0	RAPN-W1-RJ-E3
W788-2 RJ-45	6GK5 788-2FC00-0AA0	RAPN-W2-RJ-E3
W788-1 M12	6GK5 788-1GD00-0AA0	RAPN-W1-M12-E3
W788-2 M12	6GK5 788-2GD00-0AA0	RAPN-W2-M12-E3
W788-2 M12 EEC	6GK5 788-2GD00-0TA0	RAPN-W2-M12-E3
W748-1 RJ-45	6GK5 748-1FC00-0AA0	RAPN-W1-RJ-E3
W748-1 M12	6GK5 748-1GD00-0AA0	RAPN-W1-M12-E3
W788C-2 RJ-45	6GK 5788-2FC00-1AA0	RAPN-W2-RJ-E3
W788C-2 M12	6GK5 788-2GD00-1AA0	RAPN-W2-M12-E3
W788C-2 M12 EEC	6GK5788-2GD00-1TA0	RAPN-W2-M12-E3

The listed devices are approved in Brazil under the following certification numbers:



Este equipamento opera em caráter secundário, isto é, não tem direito à proteção contra interferência prejudicial, mesmo de estações do mesmo tipo e não pode causar interferência a sistemas operando em caráter primário.

KCC Statement (Republic of Korea)

사용자안내문(제5조제1항제1호관련)

기종별	사용자안내문
A 급 기기급 기기 (업무용 방송통신기기)	이 기기는 업무용(A 급)으로 전자파적합등록을 한(A 급)으로 전자파적합등록을 한 기기이오니 판매자 또는 사용자는 이 점을 주의하시기 바라며, 가정외의 지역에서 사용하는 것을 목적으로 합니다.

"당해 무선설비는 전파혼신 가능성이 있으므로 인명안전과 관련된 서비스는 할 수 없음"

Approval for Mexico

The WLAN modules included in the devices have the following certification number:

RCPSIMP12-0751

Approval for Oman

Devices of the SCALANCE W786-x series are approved in Oman under the following certification numbers:

OMAN-TRA
R/1773/14
D090258

Devices of the SCALANCE W788-x series are approved in Oman under the following certification numbers:

OMAN-TRA
R/1772/14
D090258

NCC Warning Statement (Taiwan)**Article 12**

Without permission, any company, firm or user shall not alter the frequency, increase the power, or change the characteristics and functions of the original design of the certified lower power frequency electric machinery.

Article 14

The application of low power frequency electric machineries shall not affect the navigation safety nor interfere a legal communication, if an interference is found, the service will be suspended until improvement is made and the interference no longer exists.

Marking for the customs union



EAC (Eurasian Conformity)

Customs union of Russia, Belarus and Kazakhstan

Declaration of the conformity according to the technical regulations of the customs union (TR CU)

1.2 National approvals

The following table lists the countries in which the SCALANCE W700 product is approved. The diamond symbol (◆) identifies all countries for which there was no approval at the time these operating instructions were written.

The current status of the approvals can be found on the Internet at the following address:

<http://www.siemens.com/funkzulassungen>

Column	Meaning
Country	Country
Mode	IEEE 802.11 standard and the TPC and / or DFS functionality, where required
CH	Channel
MHz	Frequency
PWR (EIRP)	Maximum permitted effective isotropic radiated power
Use	Permitted use indoors and / or outdoors

1.2 National approvals

Country	Mode	CH	MHz	PWR (EIRP)	Use
Andorra	11g 11n	1	2412	100 mW	Indoor + outdoor
Belgium		-	-		
Bosnia and Herzegovina		13	2472		
Bulgaria	11a 11n TPC	36	5180	200 mW	Indoor only
Denmark		-	-		
Germany	11a 11n DFS + TPC	48	5240	200 mW	Indoor only
Estonia		52	5260		
Finland		-	-		
France		64	5320	1000 mW	Indoor + outdoor
Greece		100	5500		
Great Britain		-	-		
Ireland		116	5580	1000 mW	Indoor + outdoor
Iceland		132	5660		
Italy		-	-		
Croatia		140	5700		
Latvia					
Liechtenstein					
Lithuania					
Luxembourg					
Malta					
Macedonia					
Monaco					
Montenegro					
Netherlands					
Norway					
Austria					
Poland					
Portugal					
Romania					
San Marino					
Sweden					
Switzerland					
Serbia					
Slovakia					
Slovenia					
Spain					
Czech Republic					
Turkey					
Hungary					
Vatican					
Cyprus					
					

Country	Mode	CH	MHz	PWR (EIRP)	Use
Egypt	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36 - 64	5180 - 5320	200 mW	Indoor only
Angola	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320	1000 mW	Indoor + outdoor
		100	5500		
		-	-		
Argentina	11g 11n	1	2412	1000 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	50 mW	Indoor + outdoor
		-	-		
		48	5240		
		52	5260	250 mW	Indoor + outdoor
		-	-		
		64	5320		
		100	5500	250 mW	Indoor + outdoor
		-	-		
		120	5600		
		132	5660	250 mW	Indoor + outdoor
		-	-		
		140	5700		
		149	5745	1000 mW	Indoor + outdoor
		-	-		
		165	5825		
Australia New Zealand	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		

1.2 National approvals

Country	Mode	CH	MHz	PWR (EIRP)	Use
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320		
Bahrain	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320		
	11a 11n TPC	149	5745	2000 mW	Indoor + outdoor
		-	-		
		165	5825		
Belarus	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TCP	36	5180	100 mW	Indoor + outdoor
		-	-		
		48	5240		
	11a 11n TCP + DFS	52	5260	100 mW	Indoor + outdoor
		-	-		
		64	5320	100 mW	Indoor + outdoor
		132	5660		
		-	-	100 mW	Indoor + outdoor
		140	5700		

Country	Mode	CH	MHz	PWR (EIRP)	Use
Brazil	11g 11n	1	2412	4000 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		64	5320		
		100	5500	1000 mW	Indoor + outdoor
		-	-		
		140	5700		
		149	5745	4000 mW	Indoor + outdoor
		-	-		
		165	5825		
Chile	11g 11n	1	2412	100 mW	Indoor only
		-	-		
		13	2472		
	11a 11n TPC	36	5180	100 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	100 mW	Indoor only
		-	-		
		64	5320	100 mW	Indoor only
		149	5745		
China	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	149	5745	2000 mW	Indoor + outdoor
		-	-		
		165	5825		
Ivory Coast	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320	1000 mW	Indoor + outdoor
		100	5500		
		-	-		
		116	5580		

1.2 National approvals

Country	Mode	CH	MHz	PWR (EIRP)	Use
		132 - 140	5660 - 5700	1000 mW	Indoor + outdoor
Guatemala	11g 11n	1	2412	100 mW	Indoor + outdoor
	11g 11n	2	2417	200 mW	Indoor + outdoor
		-	-		
		10	2457		
	11g 11n	11	2462	100 mW	Indoor + outdoor
	11a 11n TPC	36	5180	200 mW	Indoor only
		- 48	- 5240		
	11a 11n DFS + TPC	52	5260	400 mW	Indoor + outdoor
		-	-		
		64	5320		
		100	5500	400 mW	Indoor + outdoor
		- 116	- 5580		
		132	5660	400 mW	Indoor + outdoor
	11a 11n TPC	- 140	- 5700		
		149	5745	400 mW	Indoor + outdoor
		- 165	- 5825		
Hong Kong	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320		
		100	5500	1000 mW	Indoor + outdoor
		- 116	- 5580		
		132	5660	1000 mW	Indoor + outdoor
		- 140	- 5700		
India	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		

Country	Mode	CH	MHz	PWR (EIRP)	Use
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320		
	11a 11n TPC	149	5745	200 mW	Indoor only
		-	-		
		165	5825		
Indonesia ♦	11g 11n	1	2412	100 mW	Indoor + outdoor
		2	2417	200 mW	Indoor + outdoor
		-	-		
		10	2457		
		11	2462	100 mW	Indoor + outdoor
		-	-		
	11a 11n TPC	13	2472	400 mW	Indoor + outdoor
		149	5745		
		-	-		
Japan 	11g 11n	13	2472	200 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a TPC	8	5040	200 mW	Indoor + outdoor
		-	-		
		16	5080		
	11a 11n	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320	200 mW	Indoor + outdoor
		100	5500		
		-	-		
	11a TPC	140	5700	200 mW	Indoor + outdoor
		184	4920		
		-	-		
		196	4980		

1.2 National approvals

Country	Mode	CH	MHz	PWR (EIRP)	Use
Kazakhstan	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	100 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	100 mW	Indoor only
		-	-		
		64	5320	100 mW	Indoor + outdoor
		132	5660		
Qatar	11g 11n	-	-	100 mW	Indoor only
		13	2472		
		149	5745	100 mW	Indoor only
	11a 11n	-	-		
		165	5825		
Colombia	11g 11n	1	2412	100 mW	Indoor + outdoor
		2	2417	200 mW	Indoor + outdoor
		-	-	100 mW	Indoor + outdoor
		10	2457		
		11	2462	100 mW	Indoor + outdoor
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	400 mW	Indoor + outdoor
		-	-	400 mW	Indoor + outdoor
		64	5320		
		100	5500	400 mW	Indoor + outdoor
		-	-		
		116	5580	400 mW	Indoor + outdoor
		132	5660		
		-	-		
		140	5700	400 mW	Indoor + outdoor
	11a 11n TPC	149	5745		
		-	-		
		165	5825		
Korea	11g 11n	1	2412	400 mW	Indoor + outdoor
		-	-		
		13	2472		

Country	Mode	CH	MHz	PWR (EIRP)	Use
	11a 11n TPC	149 - 161	5745 - 5805	400 mW	Indoor + outdoor
	11g 11n	1 - 13	2412 - 2472	100 mW	Indoor + outdoor
	11a 11n TPC	36 - 48	5180 - 5240	200 mW	Indoor + outdoor
Kuwait	11a 11n DFS + TPC	52 - 64	5260 - 5320	200 mW	Indoor + outdoor
	11g 11n	1 - 13	2412 - 2472	100 mW	Indoor + outdoor
	11a 11n TPC	149 - 161	5745 - 5805	100 mW	Indoor + outdoor
Macau	11g 11n	1 - 13	2412 - 2472	100 mW	Indoor + outdoor
	11a 11n TPC	36 - 48	5180 - 5240	200 mW	Indoor only
	11a 11n DFS + TPC	52 - 64	5260 - 5320	200 mW	Indoor only
Madagascar	11g 11n	100 - 116	5500 - 5580	1000 mW	Indoor + outdoor
	11a 11n TPC	132 - 140	5660 - 5700	1000 mW	Indoor + outdoor
	11a 11n DFS + TPC	149 - 165	5745 - 5825	400 mW	Indoor + outdoor
	11g 11n	1 - 13	2412 - 2472	100 mW	Indoor + outdoor
	11a 11n TPC	36 - 48	5180 - 5240	200 mW	Indoor only
	11a 11n DFS + TPC	52 - 64	5260 - 5320	200 mW	Indoor only
	11a 11n TPC	149 - 165	5745 - 5825	400 mW	Indoor + outdoor

1.2 National approvals

Country	Mode	CH	MHz	PWR (EIRP)	Use
Malaysia	11g 11n	1	2412	200 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n DFS + TPC	56	5280	200 mW	Indoor only
		-	-		
		64	5320		
Morocco ♦ (only with SCALANCE W786-2IA RJ-45)	11g 11n	1	2412	100 mW	Indoor only
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
Mexico	11g 11n	52	5260	200 mW	Indoor only
		-	-		
		64	5320		
	11a 11n TPC	149	5745	1000 mW	Indoor + outdoor
		-	-		
		165	5825		
Mozambique	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320		
		100	5500	1000 mW	Indoor + outdoor
		-	-		
		116	5580		
		132	5660	1000 mW	Indoor + outdoor
		-	-		
		140	5700		

Country	Mode	CH	MHz	PWR (EIRP)	Use
Oman	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320		
	11a 11n TPC	149	5745	1000 mW	Indoor + outdoor
		-	-		
		165	5825		
Pakistan	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	149	5745	100 mW	Indoor + outdoor
		-	-		
		165	5825		
Russia	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	100 mW	Indoor + outdoor
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	100 mW	Indoor + outdoor
		-	-		
		64	5320	100 mW	Indoor + outdoor
		132	5660		
		-	-		
		140	5700		
	11a 11n TPC	149	5745	100 mW	Indoor + outdoor
		-	-		
		165	5825		
Saudi Arabia	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320		

1.2 National approvals

Country	Mode	CH	MHz	PWR (EIRP)	Use
		100	5500	1000 mW	Indoor + outdoor
		-	-		
		116	5580		
		132	5660	1000 mW	Indoor + outdoor
		-	-		
South Africa 	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320		
		100	5500	1000 mW	Indoor + outdoor
		-	-		
		116	5580		
Singapore Philippines	11b 11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor + outdoor
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor + outdoor
		-	-		
		64	5320		
		100	5500	1000 mW	Indoor + outdoor
		-	-		
		116	5580		
	11a 11n TPC	132	5660	1000 mW	Indoor + outdoor
		-	-		
		140	5700		
		149	5745	1000 mW	Indoor + outdoor
		-	-		
		165	5825		
Taiwan	11g 11n	1	2412	100 mW	Indoor + outdoor
		2	2417	200 mW	Indoor + outdoor
		-	-		
		10	2457		
		11	2462	100 mW	Indoor + outdoor

Country	Mode	CH	MHz	PWR (EIRP)	Use
	11a 11n DFS + TPC	52	5260	400 mW	Indoor + outdoor
		-	-		
		64	5320		
		100	5500	400 mW	Indoor + outdoor
		-	-		
		116	5580	400 mW	Indoor + outdoor
		132	5660		
		-	-		
Thailand	11g 11n	11	2462	100 mW	Indoor + outdoor
		-	-		
		11	2462		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	400 mW	Indoor + outdoor
		-	-		
		64	5320		
		100	5500	400 mW	Indoor + outdoor
		-	-		
		116	5580	400 mW	Indoor + outdoor
		132	5660		
		-	-		
	11a 11n TPC	149	5745	400 mW	Indoor + outdoor
		-	-		
		165	5825		

1.2 National approvals

Country	Mode	CH	MHz	PWR (EIRP)	Use
Ukraine 	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor + outdoor
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor + outdoor
		-	-		
		64	5320	200 mW	Indoor + outdoor
		100	5500		
		-	-		
		116	5580		
		132	5660	200 mW	Indoor + outdoor
		-	-		
		136	5680		
Uruguay	11g 11n	1	2412	100 mW	Indoor + outdoor
		2	2417	200 mW	Indoor + outdoor
		-	-		
		10	2457	100 mW	Indoor + outdoor
		11	2462		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	400 mW	Indoor + outdoor
		-	-	400 mW	Indoor + outdoor
		64	5320		
		100	5500		
		-	-		
		116	5580	400 mW	Indoor + outdoor
		132	5660		
		-	-		
		140	5700	400 mW	Indoor + outdoor
	11a 11n TPC	149	5745		
		-	-		
		165	5825		
Venezuela	11g 11n	1	2412	1000 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		

Country	Mode	CH	MHz	PWR (EIRP)	Use
	11a 11n DFS + TPC	52	5260	1000 mW	Indoor only
		-	-		
		64	5320		
	11a 11n TPC	149	5745	4000 mW	Indoor + outdoor
		-	-		
		165	5825		
United Arab Emir- ates	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320	1000 mW	Indoor only
		100	5500		
		-	-	1000 mW	Indoor only
		116	5580		
		132	5660		
		-	-	1000 mW	Indoor only
		140	5700		
Bahamas Ecuador Canada Peru Puerto Rico USA 	11g 11n	1	2412	100 mW	Indoor + outdoor
		2	2417	200 mW	Indoor + outdoor
		-	-		
		10	2457		
	11a 11n TPC	11	2462	100 mW	Indoor + outdoor
		36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	400 mW	Indoor + outdoor
		-	-		
		64	5320	400 mW	Indoor + outdoor
		100	5500		
		-	-	400 mW	Indoor + outdoor
		116	5580		
		132	5660		
		-	-	400 mW	Indoor + outdoor
		140	5700		
	11a 11n TPC	149	5745	400 mW	Indoor + outdoor
		-	-		
		165	5825		

1.2 National approvals

Country	Mode	CH	MHz	PWR (EIRP)	Use
Vietnam	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320		
		100	5500	1000 mW	Indoor + outdoor
		-	-		
		116	5580		
		132	5660	1000 mW	Indoor + outdoor
		-	-		
		140	5700		
	11a 11n TPC	149	5745	400 mW	Indoor + outdoor
		-	-		
		165	5825		

Approvals for SCALANCE W788C / W786C 802.11n

Note

Issued approvals on the type plate of the device

The specified approvals apply only when the corresponding mark is printed on the product. You can check which of the following approvals have been granted for your product by the markings on the type plate.

Range of validity

The approvals listed in this section apply to the following products:

	Article number
SCALANCE W786C-2 RJ-45	6GK5 786-2FC00-1AA0
SCALANCE W786C-2IA RJ-45	6GK5 786-2HC00-1AA0
SCALANCE W786C-2 SFP	6GK5 786-2FE00-1AA0

	Article number
SCALANCE W788C-2 RJ-45	6GK5 788-2FC00-1AA0
SCALANCE W788C-2 M12	6GK5 788-2GD00-1AA0
SCALANCE W788C-2 M12 EEC	6GK5788-2GD00-1TA0

2.1 General approvals

CE conformity

The products

SIMATIC NET SCALANCE W786C-2 RJ45
SIMATIC NET SCALANCE W786C-2IA RJ45
SIMATIC NET SCALANCE W786-2 SFP

SIMATIC NET SCALANCE W788C-2 RJ-45
SIMATIC NET SCALANCE W788C-2 M12
SIMATIC NET SCALANCE W788C-2 M12 EEC

in the version put into circulation by Siemens AG conform to the regulations of the following European directive:

- 99/5/EC
Directive of the European Parliament and of the Council on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity. Conformity with the basic requirement of the directive is attested by adherence to the following standards:
- EN 60950-1 A1 + A2 + A11 + A12
Information technology equipment - Safety - Part 1: General requirements
- EN 301489-1 V1.9.2
Electromagnetic compatibility and radio spectrum matters (ERM) - Electromagnetic compatibility for radio equipment and services - Part 1 : Common technical requirements (V1.9.2).
- EN 301489-17 V2.2.1
Electromagnetic compatibility and radio spectrum matters (ERM) - Electromagnetic compatibility for radio equipment and services - Part 17: Specific conditions for 2.4 GHz broadband transmission systems and 5 GHz high performance RLAN equipment
- EN 300328 V1.8.1
Electromagnetic Compatibility and Radio Spectrum Matters (ERM); — Broadband transmission systems — Data transmission equipment operating in the 2.4 GHz ISM band and using spread spectrum modulation techniques — Harmonized EN covering essential requirements under article 3.2 of the R&TTE Directive
- EN 301893 V1.7.1
Broadband Radio Access Networks (BRAN) - 5 GHz high performance RLAN - Harmonized EN covering essential requirements of article 3.2 of the R&TTE Directive
- EN 62311
Assessment of electronic and electrical equipment related to human exposure restrictions for electro-magnetic fields (0 Hz – 300 GHz)
- 1999/519/EC
Council recommendation on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz)

Devices connected to the system must meet the relevant safety regulations.

The EC Declaration of Conformity is available for the responsible authorities according to the above-mentioned EC Directive at the following address:

Siemens Aktiengesellschaft
Division Process Industries and Drives
Postfach 4848
D-90026 Nürnberg

This declaration certifies compliance with the directives named above, but does not guarantee any specific properties.

Note

The specified approvals apply only when the corresponding mark is printed on the product.

Certification ID

The following tables show the product names and the corresponding certification ID:

Type	Number and type of the Ethernet interfaces	Number of internal antennas	Number of R-SMA sockets for external antennas	Certification ID Order number Order number US variant
W786C-2 RJ-45	1 x RJ-45	-	6	EAPN-W2-RJ-E3 6GK5 786-2FC00-1AA0
W786C-2IA RJ-45	1 x RJ-45	2	-	EAPN-W2-RJ-I3 6GK5 786-2HC00-1AA0
W786-2 SFP	2 x SFP	-	6	EAPN-W2-SFP-E3 6GK5 786-2FE00-1AA0

Type	Certification ID Order number:
W788C-2 RJ-45	RAPN-W2-RJ-E3 6GK 5788-2FC00-1AA0
W788C-2 M12	RAPN-W2-M12-E3 6GK5 788-2GD00-1AA0
W788C-2 M12 EEC	RAPN-W2-M12-E3 6GK5788-2GD00-1TA0

2.1 General approvals



Konformitätserklärung / Declaration of Conformity

Hersteller/Verantwortlicher:
Manufacturer/Responsible Person Alfred Hümmer

Anschrift:
Address Siemens Aktiengesellschaft
PD PA CI
Gleichwitzer Str. 555
D-90475 Nuremberg
Bundesrepublik Deutschland

Produkt/Product:
Typ/Type:
Modell/Model: Industrial WLAN Access Point EAPN Family
**EAPN-W1-RJ-E3,
EAPN-W2-RJ-E3,
EAPN-W2-RJ-I3,
EAPN-W2-SFP-E3**

Einsatzzweck/Intended Use: Wireless Communication

Das bezeichnete Produkt (Modell) entspricht in der gelieferten Ausführung den Bestimmungen der EU-Richtlinie 1999/5/EG, RICHTLINIE DES EUROPÄISCHEN PARLAMENTS UND DES RATES vom 9. März 1999 über Funkanlagen und Telekommunikationsendeinrichtungen und die gegenseitige Anerkennung ihrer Konformität

Die Übereinstimmung des bezeichneten Produkts (Modell) mit den Vorschriften der angewandten Richtlinie(n) wird nachgewiesen durch die vollständige Einhaltung folgender Normen / Vorschriften:


The designated product (model) as delivered is in conformity with the provisions of the EU-Directive 1999/5/EC DIRECTIVE OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity

The conformity of the designated product (model) with the provisions of the applied Directive(s) is proved by full compliance with the following standards / regulations:

Art. 3 (1) a) Schutz der Gesundheit und Sicherheit Harmonisierte Normen / Health and Safety - Harmonised standards:			
Referenznummer <i>Reference number</i>	Version / Ausgabedatum <i>Version / Date of issue</i>	Referenznummer <i>Reference number</i>	Version / Ausgabedatum <i>Version / Date of issue</i>
EN 60950-1+A1+A2+A11+A12	2006/2010/2013/2009/2011	EN 62311	2008
		1999/519/EC	
Art. 3 (1) b) EMV Harmonisierte Normen / EMC Harmonised standards:			
Referenznummer <i>Reference number</i>	Version / Ausgabedatum <i>Version / Date of issue</i>	Referenznummer <i>Reference number</i>	Version / Ausgabedatum <i>Version / Date of issue</i>
ETSI EN 301 489-1	V1.9.2	ETSI EN 301 489-17	V2.2.1
Art. 3 (2) Effiziente Nutzung des Funkspektrums Harmonisierte Normen / Efficient usage of spectrum Harmonised standards:			
Referenznummer <i>Reference number</i>	Version / Ausgabedatum <i>Version / Date of issue</i>	Referenznummer <i>Reference number</i>	Version / Ausgabedatum <i>Version / Date of issue</i>
ETSI EN 300 328	V1.8.1	ETSI EN 301 893	V1.7.1

Siemens Aktiengesellschaft

Karlsruhe, den / the 15.10.2014
Ort / place of issue Datum / Date of issue

Groetschel, i.V. 
Name / name Unterschrift / signature

Leiter Qualitätsmanagement / Quality Manager, MF-K
Funktion / function

Diese Erklärung bescheinigt die Übereinstimmung mit den genannten Richtlinien, ist jedoch keine Beschaffenheits- oder Haltbarkeitsgarantie. Die Sicherheitshinweise der mitgelieferten Produktdokumentation sind zu beachten.

Siemens Aktiengesellschaft, Chairman of the Supervisory Board: Gerhard Cromme; Managing Board: Joe Kaeser, Chairman, President and Chief Executive Officer; Roland Busch, Lisa Davis, Klaus Helmrich, Hermann Requardt, Siegfried Russwurm, Ralf P. Thomas; Registered offices: Berlin and Munich, Germany; Commercial registries: Berlin Charlottenburg, HRB 12300, Munich, HRB 6684; WEEE-Reg.-No. DE 23691322

Hümmer, i.V. 
Name / name Unterschrift / signature

Leiter Entwicklung / Vice President R&D, PD PA CI R&D
Funktion / function

This declaration certifies the compliance with the indicated directives but does not imply any warranty for properties. The safety instructions of the accompanying product documentation shall be observed.



Konformitätserklärung / Declaration of Conformity

Hersteller/Verantwortlicher: Alfred Hümmel
 Manufacturer/Responsible Person

Anschrift:
 Address Siemens Aktiengesellschaft
 PD PA CI
 Gleichwitzer Str. 555
 D-90475 Nürnberg
 Bundesrepublik Deutschland

Produkt/Product:
 Typ/Type: Industrial WLAN Access Point EAPN Family
 Modell/Model: **RAPN-W1-RJ-E3,
 RAPN-W2-RJ-E3,
 RAPN-W1-M12-E3,
 RAPN-W2-M12-E3**

Einsatzzweck/Intended Use: Wireless Communication

Das bezeichnete Produkt (Modell) entspricht in der gelieferten Ausführung den Bestimmungen der EU-Richtlinie 1999/5/EG, RICHTLINIE DES EUROPÄISCHEN PARLAMENTS UND DES RATES vom 9. März 1999 über Funkanlagen und Telekommunikationsendeinrichtungen und die gegenseitige Anerkennung ihrer Konformität

Die Übereinstimmung des bezeichneten Produkts (Modell) mit den Vorschriften der angewandten Richtlinie(n) wird nachgewiesen durch die vollständige Einhaltung folgender Normen / Vorschriften:


The designated product (model) as delivered is in conformity with the provisions of the EU-Directive 1999/5/EC DIRECTIVE OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity

The conformity of the designated product (model) with the provisions of the applied Directive(s) is proved by full compliance with the following standards / regulations:

Art. 3 (1) a) Schutz der Gesundheit und Sicherheit Harmonisierte Normen / Health and Safety - Harmonised standards:			
Referenznummer Reference number	Version / Ausgabedatum Version / Date of issue	Referenznummer Reference number	Version / Ausgabedatum Version / Date of issue
EN 60950-1+A1+A2+A11+A12	2006/2010/2013/2009/2011	EN 62311	2008
		1999/519/EC	
Art. 3 (1) b) EMV Harmonisierte Normen / EMC Harmonised standards:			
Referenznummer Reference number	Version / Ausgabedatum Version / Date of issue	Referenznummer Reference number	Version / Ausgabedatum Version / Date of issue
ETSI EN 301 489-1	V1.9.2	ETSI EN 301 489-17	V2.2.1
Art. 3 (2) Effiziente Nutzung des Funkspektrums Harmonisierte Normen / Efficient usage of spectrum Harmonised standards:			
Referenznummer Reference number	Version / Ausgabedatum Version / Date of issue	Referenznummer Reference number	Version / Ausgabedatum Version / Date of issue
ETSI EN 300 328	V1.8.1	ETSI EN 301 893	V1.7.1

Siemens Aktiengesellschaft


Karlsruhe, den / the 15.10.2014
 Ort / place of issue Datum / Date of issue

Groetschel, i.V. 
 Name / name Unterschrift / signature

Leiter Qualitätsmanagement / Quality Manager, MF-K
 Funktion / function

Diese Erklärung bescheinigt die Übereinstimmung mit den genannten Richtlinien, ist jedoch keine Beschaffenheits- oder Haltbarkeitsgarantie. Die Sicherheitshinweise der mitgelieferten Produktdokumentation sind zu beachten.

Siemens Aktiengesellschaft: Chairman of the Supervisory Board: Gerhard Cromme; Managing Board: Joe Kaeser, Chairman, President and Chief Executive Officer; Roland Busch, Lisa Davis, Klaus Helmrich, Hermann Requardt, Siegfried Russwurm, Ralf P. Thomas; Registered offices: Berlin and Munich, Germany; Commercial registries: Berlin Charlottenburg, HRB 12300, Munich, HRB 6684; WEEE-Reg.-No. DE 23691322

Huemmer, i.V. 
 Name / name Unterschrift / signature

Leiter Entwicklung / Vice President R&D, PD PA CI R&D
 Funktion / function

This declaration certifies the compliance with the indicated directives but does not imply any warranty for properties. The safety instructions of the accompanying product documentation shall be observed.

ATEX (explosion protection directive)

WARNING

When using SIMATIC NET products in hazardous area zone 2, make absolutely sure that the associated conditions in the following document are adhered to:

"SIMATIC NET Product Information Use of subassemblies/modules in a Zone 2 Hazardous Area".

You will find this document

- on the data medium that ships with some devices.
- on the Internet pages of Siemens Industry Online Support (<http://support.automation.siemens.com/ww>).

Enter the document identification number C234 as the search term.

SIMATIC NET products meet the requirements of the EC directive:94/9/EC "Equipment and Protective Devices for Use in Potentially Explosive Atmospheres".

ATEX classification:

II 3 G Ex nA IIC T4 Gc

KEMA 07ATEX0145 X

The products meet the requirements of the following standards:

- EN 60079-15 (electrical apparatus for potentially explosive atmospheres; Type of protection "n")
- EN 60079-0 (Explosive atmospheres - Part 0: Equipment - General requirements)

You will find the current versions of the standards in the currently valid ATEX certificates.

IECEX

The SIMATIC NET products meet the requirements of explosion protection according to IECEX.

IECEX classification:

Ex nA IIC T4 Gc

DEK 14.0025X

The products meet the requirements of the following standards:

- IEC 60079-15 (Explosive atmospheres - Part 15: Equipment protection by type of protection "n")
- IEC 60079-0 (Explosive atmospheres - Part 0: Equipment - General requirements)

You will find the current versions of the standards in the currently valid IECEX certificates.

FM

The product meets the requirements of the standards:

- Factory Mutual Approval Standard Class Number 3611
- FM Hazardous (Classified) Location Electrical Equipment:
Non Incendive / Class I / Division 2 / Groups A,B,C,D / T4 and
Non Incendive / Class I / Zone 2 / Group IIC / T4

cULus Approval Hazardous Location

cULus Listed I. T. E. FOR HAZ. LOC.

Underwriters Laboratories Inc. complying with

- UL 60950-1 (Information Technology Equipment)
- ANSI/ISA 12.12.01-2007
- CSA C22.2 No. 213-M1987

Approved for use in

Cl. 1, Div. 2, GP A, B, C, D T4

Cl. 1, Zone 2, GP IIC T4

Report no. E240480

FCC approval

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Notice

Changes or modifications made to this equipment not expressly approved by SIEMENS may void the FCC authorization to operate this equipment.

IEEE 802.11b or g operation of this product in the USA is firmware-limited to channels 1 through 11.

2.1 General approvals

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Notice

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. Professional Installation Notice:

To comply with FCC part 15 rules in the United States, the system must be professionally installed to ensure compliance with the Part 15 certification. It is the responsibility of the operator and professional installer to ensure that only certified systems are deployed in the United States. The use of the system in any other combination (such as co-located antennas transmitting the same information) is expressly forbidden.

Notice**For use of DFS channels**

- Use of the RCoax Cable Antenna 6XV1875-2D is not permitted in channels which require dynamic frequency selection (DFS).
- Any installation of either a master or a client device within 35 km of a TDWR (Terminal Doppler Weather Radar) location shall be separated by at least 30 MHz (center-to-center) from the TDWR operating frequency.
These devices shall be registered in the industry sponsored WISPA database,

<http://udia.spectrumbridge.com/udia/home.aspx>
<http://udia.spectrumbridge.com/udia/home.aspx>

When you open this link, you get the following choices:

- "Search" opens a window with TDWR locations and frequencies.
- "User Signup" allows you to register as user of the database.
- After registering you can Logon and register your WLAN location. Please fill in all required information.

For more information with respect to WISPA database and TWDR locations please consult FCC publication KDB 443999 D01.

NEMA TS2

The product meets the requirements of the standard

NEMA TS2 (Traffic Controller Assemblies with NTCIP Requirements)

SCALANCE W788C-2 M12 EEC

6GK5788-2GD00-1TA0

RSS-247 of Industry Canada for SCALANCE W786-x

This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

This radio transmitter (IC: 267AA-MPCIE1V1) has been approved by Industry Canada to operate with the antenna types listed in section 6.8 with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

2.1 General approvals

To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that permitted for successful communication.

That the device for the band 5150-5250 MHz is only for indoor usage to reduce potential for harmful interference to co-channel mobile satellite systems.

Users should also be cautioned to take note that high power radars are allocated as primary users (meaning they have priority) of 5250-5350 MHz and 5650-5850 MHz and these radars could cause interference and/or damage to LE-LAN devices.

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

RSS-247 of Industry Canada for SCALANCE W7x8

This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

This radio transmitter (IC: 267AA-MPCIE1V1) has been approved by Industry Canada to operate with the antenna types listed in section 5.4 with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that permitted for successful communication.

That the device for the band 5150-5250 MHz is only for indoor usage to reduce potential for harmful interference to co-channel mobile satellite systems.

Users should also be cautioned to take note that high power radars are allocated as primary users (meaning they have priority) of 5250-5350 MHz and 5650-5850 MHz and these radars could cause interference and/or damage to LE-LAN devices.

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Note for USA, Canada, Puerto Rico, Peru, Bahamas, Ecuador and Columbia

When operating the SCALANCE W700 with DFS (Dynamic Frequency Selection), the IWLAN RCoax Cable 5 GHz (order number 6XV1875-2D) may not be used in the countries listed above.

Approvals in Argentina

Devices of the SCALANCE W786-x series are approved in Argentina under the following certification numbers:

Certification ID	Certification number
EAPN-W1-RJ-E3	CNC: C-11549
EAPN-W2-RJ-E3	CNC: C-11536
EAPN-W2-RJ-I3	CNC: C-11564
EAPN-W2-SFP-E3	CNC: C-11547

Devices of the SCALANCE W788-x series are approved in Argentina under the following certification numbers:

Certification ID	Certification number
RAPN-W1-RJ-E3	CNC: C-11541
RAPN-W2-RJ-E3	CNC: C-11502
RAPN-W1-M12-E3	CNC: C-11546
RAPN-W2-M12-E3	CNC: C-11548

Approval in Brazil

From the SCALANCE W786-x series, the following devices are approved for Brazil:

Type	Order number	EAPN number
W786-1 RJ-45	6GK5 786-1FC00-0AA0	EAPN-W1-RJ-E3
W786-2 RJ-45	6GK5 786-2FC00-0AA0	EAPN-W2-RJ-E3
W786C-2 RJ-45	6GK5 786-2FC00-1AA0	EAPN-W2-RJ-E3
W786-2IA RJ-45	6GK5 786-2HC00-0AA0	EAPN-W2-RJ-I3
W786C-2IA RJ-45	6GK5 786-2HC00-1AA0	EAPN-W2-RJ-I3
W786-2 SFP	6GK5 786-2FE00-0AA0	EAPN-W2-SFP-E3

The listed devices are approved in Brazil under the following certification numbers:

2.1 General approvals



Este equipamento opera em caráter secundário, isto é, não tem direito à proteção contra interferência prejudicial, mesmo de estações do mesmo tipo e não pode causar interferência a sistemas operando em caráter primário.

From the SCALANCE W7x8 series, the following devices are approved for Brazil:

Type	Order number	RAPN number
W788-1 RJ-45	6GK 5788-1FC00-0AA0	RAPN-W1-RJ-E3
W788-2 RJ-45	6GK5 788-2FC00-0AA0	RAPN-W2-RJ-E3
W788-1 M12	6GK5 788-1GD00-0AA0	RAPN-W1-M12-E3
W788-2 M12	6GK5 788-2GD00-0AA0	RAPN-W2-M12-E3
W788-2 M12 EEC	6GK5 788-2GD00-0TA0	RAPN-W2-M12-E3
W748-1 RJ-45	6GK5 748-1FC00-0AA0	RAPN-W1-RJ-E3
W748-1 M12	6GK5 748-1GD00-0AA0	RAPN-W1-M12-E3
W788C-2 RJ-45	6GK 5788-2FC00-1AA0	RAPN-W2-RJ-E3
W788C-2 M12	6GK5 788-2GD00-1AA0	RAPN-W2-M12-E3
W788C-2 M12 EEC	6GK5788-2GD00-1TA0	RAPN-W2-M12-E3

The listed devices are approved in Brazil under the following certification numbers:



Este equipamento opera em caráter secundário, isto é, não tem direito à proteção contra interferência prejudicial, mesmo de estações do mesmo tipo e não pode causar interferência a sistemas operando em caráter primário.

Approval for Mexico

The WLAN modules included in the devices have the following certification number:

RCPSIMP12-0751

Approval for Oman

Devices of the SCALANCE W786-x series are approved in Oman under the following certification numbers:

OMAN-TRA
R/1773/14
D090258

Devices of the SCALANCE W788-x series are approved in Oman under the following certification numbers:

OMAN-TRA
R/1772/14
D090258

Marking for the customs union



EAC (Eurasian Conformity)

Customs union of Russia, Belarus and Kazakhstan

Declaration of the conformity according to the technical regulations of the customs union (TR CU)

2.2 National approvals

The national approval of the controller-based access points depends on the controller on which they are operated. The controllers are available in the following country-specific versions:

- Version for the USA and Canada (NAM)
Article no. 6GK5 711-0XC00-1AB0
These countries are indicated in the table (NAM).
- Version for the Japan (JP)
Article no. 6GK5 711-0XC00-1AD0
- Version for countries outside Japan and NAM (RoW)
Article no. 6GK5 711-0XC00-1AA0

The diamond symbol (◆) identifies all countries for which there was no approval at the time these operating instructions were written.

The current status of the approvals can be found on the Internet at the following address:

<http://www.siemens.com/funkzulassungen>

Column	Meaning
Country	Country
Mode	IEEE 802.11 standard and the TPC and / or DFS functionality, where required
CH	Channel
MHz	Frequency
PWR (EIRP)	Maximum permitted effective isotropic radiated power
Use	Permitted use indoors and / or outdoors

Country	Mode	CH	MHz	PWR (EIRP)	Use
Andorra	11g 11n	1	2412	100 mW	Indoor + outdoor
Belgium		-	-		
Bulgaria		13	2472		
Denmark	11a 11n TPC	36	5180	200 mW	Indoor only
Germany		-	-		
Estonia		48	5240		
Finland	11h 11n DFS + TPC	52	5260	200 mW	Indoor only
France		-	-		
Greece		64	5320		
Great Britain		100	5500	1000 mW	Indoor + outdoor
Ireland					
Iceland		-	-		
Italy	11h 11n DFS + TPC	116	5580	1000 mW	Indoor + outdoor
Croatia		132	5660		
Latvia		-	-		
Liechtenstein		140	5700		
Lithuania					
Luxembourg					
Malta					
Macedonia					
Monaco					
Montenegro					
Netherlands					
Norway					
Austria					
Poland					
Portugal					
Romania					
San Marino					
Sweden					
Switzerland					
Serbia					
Slovakia					
Slovenia					
Spain					
Czech Republic					
Turkey					
Hungary					
Vatican					
Cyprus					
	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		64	5320		

2.2 National approvals

Country	Mode	CH	MHz	PWR (EIRP)	Use
Angola	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11h 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320		
		100	5500	1000 mW	Indoor + outdoor
		-	-		
		116	5580		
Argentina	11g 11n	1	2412	1000 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	50 mW	Indoor + outdoor
		-	-		
		48	5240		
		52	5260	250 mW	Indoor + outdoor
		-	-		
		64	5320		
		100	5500	250 mW	Indoor + outdoor
		-	-		
		120	5600		
		132	5660	250 mW	Indoor + outdoor
		-	-		
		140	5700		
		149	5745	1000 mW	Indoor + outdoor
		-	-		
Australia New Zealand 	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11h 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320		

Country	Mode	CH	MHz	PWR (EIRP)	Use
	11a 11n TPC	149 - 165	5745 - 5825	400 mW	Indoor + outdoor
Bahrain	11g 11n	1 - 13	2412 - 2472	100 mW	Indoor + outdoor
	11a 11n TPC	36 - 48	5180 - 5240	200 mW	Indoor only
	11h 11n DFS + TPC	52 - 64	5260 - 5320	200 mW	Indoor only
	11a 11n TPC	149 - 165	5745 - 5825	2000 mW	Indoor + outdoor
Belarus	11g 11n	1 - 13	2412 - 2472	100 mW	Indoor + outdoor
	11a 11n TCP	36 - 48	5180 - 5240	100 mW	Indoor + outdoor
	11a 11n TCP + DFS	52 - 64	5260 - 5320	100 mW	Indoor + outdoor
		132 - 140	5660 - 5700	100 mW	Indoor + outdoor
Brazil	11g 11n	1 - 13	2412 - 2472	4000 mW	Indoor + outdoor
	11a 11n TPC	36 - 64	5180 - 5320	200 mW	Indoor only
		100 - 140	5500 - 5700	1000 mW	Indoor + outdoor
		149 - 165	5745 - 5825	4000 mW	Indoor + outdoor

2.2 National approvals

Country	Mode	CH	MHz	PWR (EIRP)	Use
Chile	11g 11n	1	2412	100 mW	Indoor only
		-	-		
		13	2472		
	11a 11n TPC	36	5180	100 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	100 mW	Indoor only
		-	-		
		64	5320	100 mW	Indoor only
		149	5745		
		-	-		
		165	5825		
China	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	149	5745	2000 mW	Indoor + outdoor
		-	-		
		165	5825		
Ivory Coast	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320		
		100	5500	1000 mW	Indoor + outdoor
		-	-		
		116	5580	1000 mW	Indoor + outdoor
		132	5660		
		-	-		
		140	5700		

Country	Mode	CH	MHz	PWR (EIRP)	Use
Guatemala	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		11	2462		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	400 mW	Indoor + outdoor
		-	-		
		64	5320	400 mW	Indoor + outdoor
		100	5500		
		-	-	400 mW	Indoor + outdoor
		116	5580		
		132	5660	400 mW	Indoor + outdoor
		-	-		
		140	5700	400 mW	Indoor + outdoor
	11a 11n TPC	149	5745		
		-	-		
		165	5825		
Hong Kong	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320	1000 mW	Indoor + outdoor
		100	5500		
		-	-	1000 mW	Indoor + outdoor
		116	5580		
		132	5660	1000 mW	Indoor + outdoor
		-	-		
		140	5700		

2.2 National approvals

Country	Mode	CH	MHz	PWR (EIRP)	Use
India	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11h 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320		
	11a 11n TPC	149	5745	200 mW	Indoor only
		-	-		
		165	5825		
Indonesia ♦	11g 11n	1	2412	100 mW	Indoor + outdoor
		2	2417	200 mW	Indoor + outdoor
		-	-	100 mW	Indoor + outdoor
		10	2457		
		11	2462		
		-	-	400 mW	Indoor + outdoor
		13	2472		
	11a 11n TPC	149	5745	400 mW	Indoor + outdoor
Japan 	11g 11n	1	2412	200 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a TPC	8	5040	200 mW	Indoor + outdoor
		12	5060		
		16	5080		
	11a 11n	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11h 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-	200 mW	Indoor + outdoor
		64	5320		
		100	5500		
		-	-		
	11a TPC	184	4920	200 mW	Indoor + outdoor
		-	-		
		196	4980		

Country	Mode	CH	MHz	PWR (EIRP)	Use
Qatar	11g 11n	1	2412	100 mW	Indoor only
		-	-		
		13	2472		
	11a 11n	149 - 165	5745 - 5825	100 mW	Indoor only
Kazakhstan	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	100 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	100 mW	Indoor only
		-	-		
		64	5320	100 mW	Indoor + outdoor
		132 - 140	5660 - 5700		
Colombia (NAM)	11g 11n	1	2412	100 mW	Indoor + outdoor
		2	2417	200 mW	Indoor + outdoor
		-	-		
		10	2457		
	11a 11n TPC	11	2462	100 mW	Indoor + outdoor
		36	5180	200 mW	Indoor only
		-	-		
		48	5240		
Korea 	11g 11n	149	5745	400 mW	Indoor + outdoor
		-	-		
		165	5825		
	11a 11n TPC	1	2412	400 mW	Indoor + outdoor
		-	-		
		13	2472		

2.2 National approvals

Country	Mode	CH	MHz	PWR (EIRP)	Use
Kuwait	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor + outdoor
		-	-		
		48	5240		
Macau	11g 11n	52	5260	200 mW	Indoor + outdoor
		-	-		
		64	5320		
	11a 11n TPC	149	5745	100 mW	Indoor + outdoor
		-	-		
		161	5805		
Madagascar	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320	1000 mW	Indoor + outdoor
		100	5500		
		-	-	1000 mW	Indoor + outdoor
		116	5580		
Malaysia	11g 11n	132	5660	400 mW	Indoor + outdoor
		-	-		
		140	5700		
	11a 11n TPC	149	5745	1000 mW	Indoor + outdoor
		-	-		
		165	5825		

Country	Mode	CH	MHz	PWR (EIRP)	Use
Mexico (NAM)	11g 11n	1	2412	500 mW	Indoor + outdoor
		-	-		
		11	2462		
	11a 11n DFS + TPC	52	5180	1000 mW	Indoor + outdoor
		-	-		
		64	5320		
Mozambique	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11h 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320	1000 mW	Indoor + outdoor
		100	5500		
		-	-	1000 mW	Indoor + outdoor
		116	5580		
Oman	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320	1000 mW	Indoor + outdoor
	11a 11n TPC	149	5745		
		-	-		
		165	5825		
Pakistan	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	149	5745	100 mW	Indoor + outdoor
		-	-		
		165	5825		

2.2 National approvals

Country	Mode	CH	MHz	PWR (EIRP)	Use
Russia	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	100 mW	Indoor + outdoor
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	100 mW	Indoor + outdoor
		-	-		
		64	5320	100 mW	Indoor + outdoor
		132	5660		
Saudi Arabia	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11h 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320	1000 mW	Indoor + outdoor
		100	5500		
		-	-	1000 mW	Indoor + outdoor
		116	5580		
		132	5660	1000 mW	Indoor + outdoor
		-	-		
		140	5700		

Country	Mode	CH	MHz	PWR (EIRP)	Use
Singapore Philippines ♦	11b 11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor + outdoor
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor + outdoor
		-	-		
		64	5320	1000 mW	Indoor + outdoor
		100	5500		
		-	-		
	11a 11n TPC	116	5580	1000 mW	Indoor + outdoor
		132	5660		
		-	-	1000 mW	Indoor + outdoor
		140	5700		
		-	-		
South Africa 	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11h 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320	1000 mW	Indoor + outdoor
		100	5500		
		-	-		
		116	5580	1000 mW	Indoor + outdoor
		132	5660		
		-	-	1000 mW	Indoor + outdoor
		140	5700		
Taiwan ♦ 	11g 11n	1	2412	100 mW	Indoor + outdoor
		2	2417	200 mW	Indoor + outdoor
		-	-		
		10	2457	100 mW	Indoor + outdoor
		11	2462		
	11a 11n TPC	52	5260	400 mW	Indoor + outdoor
		-	-		
		64	5320		
		100	5500		
		-	-		
		165	5825		

2.2 National approvals

Country	Mode	CH	MHz	PWR (EIRP)	Use
Thailand	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		11	2462		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	400 mW	Indoor + outdoor
		-	-	400 mW	Indoor + outdoor
		64	5320		
		100	5500		
		-	-	400 mW	Indoor + outdoor
		116	5580		
		132	5660	400 mW	Indoor + outdoor
		-	-		
		140	5700		
Ukraine 	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor + outdoor
		-	-		
		48	5240		
	11h 11n DFS + TPC	52	5260	200 mW	Indoor + outdoor
		-	-	200 mW	Indoor + outdoor
		64	5320		
		100	5500		
		-	-	200 mW	Indoor + outdoor
		116	5580		
		132	5660	200 mW	Indoor + outdoor
		-	-		
		136	5680		

Country	Mode	CH	MHz	PWR (EIRP)	Use
Uruguay	11g	1	2412	100 mW	Indoor + outdoor
		-	-	-	
		11	2462	200 mW	
	11a	36	5180	200 mW	Indoor only
		-	-	-	
		48	5240	-	
	11a	149	5745	400 mW	Indoor + outdoor
		-	-	-	
		165	5825	-	
	11n 11g	1	2412	100 mW	Indoor + outdoor
		-	-	-	
		11	2462	200 mW	
	11a 11n	36	5180	200 mW	Indoor only
		-	-	-	
		48	5240	-	
	11a 11n	149	5745	400 mW	Indoor + outdoor
		-	-	-	
		165	5825	-	
Venezuela	11g 11n	1	2412	1000 mW	Indoor + outdoor
		-	-	-	
		13	2472	-	
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-	-	
		48	5240	-	
	11a 11n DFS + TPC	52	5260	1000 mW	Indoor only
		-	-	-	
		64	5320	-	
	11a 11n TPC	149	5745	4000 mW	Indoor + outdoor
		-	-	-	
		165	5825	-	

2.2 National approvals

Country	Mode	CH	MHz	PWR (EIRP)	Use
United Arab Emirates	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11h 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320		
		100	5500	1000 mW	Indoor only
		-	-		
		116	5580		
		132	5660	1000 mW	Indoor only
		-	-		
		140	5700		
Bahamas (NAM) Ecuador Canada (NAM) Peru Puerto Rico (NAM) USA (NAM) 	11g 11n	1	2412	100 mW	Indoor + outdoor
		2	2417	200 mW	Indoor + outdoor
		-	-		
		10	2457		
	11a 11n DFS + TPC	11	2462	100 mW	Indoor + outdoor
		52	5260	400 mW	Indoor + outdoor
		-	-		
		64	5320		
		100	5500	400 mW	Indoor + outdoor
		-	-		
		116	5580		
		132	5660	400 mW	Indoor + outdoor
		-	-		
		140	5700		
	11a 11n TPC	149	5745	400 mW	Indoor + outdoor
		-	-		
		165	5825		

Country	Mode	CH	MHz	PWR (EIRP)	Use
Vietnam	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11h 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320		
		100	5500	1000 mW	Indoor + outdoor
		-	-		
		116	5580		
		132	5660	1000 mW	Indoor + outdoor
		-	-		
		140	5700		
	11a 11n TPC	149	5745	400 mW	Indoor + outdoor
		-	-		
		165	5825		

Approvals for SCALANCE W760 / W720 / W770 / W730 802.11n

3

Note

Issued approvals on the type plate of the device

The specified approvals apply only when the corresponding mark is printed on the product. You can check which of the following approvals have been granted for your product by the markings on the type plate.

Range of validity

The approvals listed in this section apply to the following products:

	Article number	Article number of the US version
Access point		
SCALANCE W761-1 RJ-45	6GK5761-1FC00-0AA0	6GK5761-1FC00-0AB0
Ethernet client modules		
SCALANCE W722-1 RJ-45 (iFeatures)	6GK5722-1FC00-0AA0	6GK5722-1FC00-0AB0
SCALANCE W721-1 RJ-45	6GK5721-1FC00-0AA0	6GK5721-1FC00-0AB0

	Article number	Article number of the US version
Access points		
SCALANCE W774-1 RJ-45	6GK5774-1FX00-0AA0	6GK5774-1FX00-0AB0
SCALANCE W774-1 M12 EEC	6GK5774-1FY00-0TA0	6GK5774-1FY00-0TB0
Ethernet client module		
SCALANCE W734-1 RJ-45	6GK5734-1FX00-0AA0	6GK5734-1FX00-0AB0

3.1 General approvals

CE conformity

The products

SIMATIC NET SCALANCE W761-1 RJ-45

SIMATIC NET SCALANCE W722-1 RJ-45

SIMATIC NET SCALANCE W721-1 RJ-45

SIMATIC NET SCALANCE W774-1 RJ-45

SIMATIC NET SCALANCE W774-1 M12 EEC

SIMATIC NET SCALANCE W734-1 RJ-45

in the version put into circulation by Siemens AG conform to the regulations of the following European directives:

- 99/5/EC
Directive of the European Parliament and of the Council on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity. Conformity with the basic requirement of the directive is attested by adherence to the following standards:
- EN 60950-1 +A1 + A2 + A11 + A12
Information technology equipment - Safety - Part 1: General requirements
- EN 301489-1 V1.9.2
Electromagnetic compatibility and radio spectrum matters (ERM) - Electromagnetic compatibility for radio equipment and services - Part 1 : Common technical requirements (V1.9.2).
- EN 301489-17 V2.2.1
Electromagnetic compatibility and radio spectrum matters (ERM) - Electromagnetic compatibility for radio equipment and services - Part 17: Specific conditions for 2.4 GHz broadband transmission systems and 5 GHz high performance RLAN equipment
- EN 300328 V1.8.1
Electromagnetic Compatibility and Radio Spectrum Matters (ERM); — Broadband transmission systems — Data transmission equipment operating in the 2.4 GHz ISM band and using spread spectrum modulation techniques — Harmonized EN covering essential requirements under article 3.2 of the R&TTE Directive
- EN 301893 V1.7.1
Broadband Radio Access Networks (BRAN) - 5 GHz high performance RLAN - Harmonized EN covering essential requirements of article 3.2 of the R&TTE Directive
- EN 62311
Assessment of electronic and electrical equipment related to human exposure restrictions for electro-magnetic fields (0 Hz – 300 GHz)
- 1999/519/EC
Council recommendation on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz)

Devices connected to the system must meet the relevant safety regulations.

The EC Declaration of Conformity is available for the responsible authorities according to the above-mentioned EC Directive at the following address:

Siemens Aktiengesellschaft
Division Process Industries and Drives
Postfach 4848
D-90026 Nürnberg

This declaration certifies compliance with the directives named above, but does not guarantee any specific properties.

Note

The specified approvals apply only when the corresponding mark is printed on the product.

Certification ID

The following table shows the product names and the corresponding certification ID:

Type	Certification ID
	Order number
	Order number US variant
W761-1 RJ-45	ELN-W1-RJ-E1 6GK5761-1FC00-0AA0 6GK5761-1FC00-0AB0
W722-1 RJ-45	ELN-W1-RJ-E1 6GK5722-1FC00-0AA0 6GK5722-1FC00-0AB0
W721-1 RJ-45	ELN-W1-RJ-E1 6GK5721-1FC00-0AA0 6GK5721-1FC00-0AB0
W774-1 RJ-45	MSN-W1-RJ-E2 6GK5774-1FX00-0AA0 6GK5774-1FX00-0AB0
W774-1 M12 EEC	MSN-W1-M12-E2 6GK5774-1FY00-0TA0 6GK5774-1FY00-0TB0
W734-1 RJ-45	MSN-W1-RJ-E2 6GK5734-1FX00-0AA0 6GK5734-1FX00-0AB0

3.1 General approvals



Konformitätserklärung / Declaration of Conformity

Hersteller/Verantwortlicher: Alfred Hümmel
 Manufacturer/Responsible Person

Anschrift: Siemens Aktiengesellschaft
 Address PD PA CI
 Gleichwitzer Str. 555
 DE-90475 Nuremberg
 Bundesrepublik Deutschland

Produkt/Product: Industrial WLAN Access Point EAPN Family
 Typ/Type:
 Modell/Model: ELN-W1-RJ-E1
 Einsatzzweck/Intended Use: Wireless Communication

Das bezeichnete Produkt (Modell) entspricht in der gelieferten Ausführung den Bestimmungen der EU-Richtlinie 1999/5/EG, RICHTLINIE DES EUROPÄISCHEN PARLAMENTS UND DES RATES vom 9. März 1999 über Funkanlagen und Telekommunikationsendeinrichtungen und die gegenseitige Anerkennung ihrer Konformität

Die Übereinstimmung des bezeichneten Produkts (Modell) mit den Vorschriften der angewandten Richtlinie(n) wird nachgewiesen durch die vollständige Einhaltung folgender Normen / Vorschriften:

The designated product (model) as delivered is in conformity with the provisions of the EU-Directive 1999/5/EC DIRECTIVE OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity

The conformity of the designated product (model) with the provisions of the applied Directive(s) is proved by full compliance with the following standards / regulations:

Art. 3 (1) a) Schutz der Gesundheit und Sicherheit Harmonisierte Normen / Health and Safety - Harmonised standards:

Referenznummer Reference number	Version / Ausgabedatum Version / Date of issue	Referenznummer Reference number	Version / Ausgabedatum Version / Date of issue
EN 60950-1+A1+A2+A11+A12	2006/2010/2013/2009/2011	EN 62311	2008
		1999/519/EC	

Art. 3 (1) b) EMV Harmonisierte Normen / EMC Harmonised standards:

Referenznummer Reference number	Version / Ausgabedatum Version / Date of issue	Referenznummer Reference number	Version / Ausgabedatum Version / Date of issue
ETSI EN 301 489-1	V1.9.2	ETSI EN 301 489-17	V2.2.1

Art. 3 (2) Effiziente Nutzung des Funkspektrums Harmonisierte Normen / Efficient usage of spectrum Harmonised standards:

Referenznummer Reference number	Version / Ausgabedatum Version / Date of issue	Referenznummer Reference number	Version / Ausgabedatum Version / Date of issue
ETSI EN 300 328	V1.8.1	ETSI EN 301 893	V1.7.1

Siemens Aktiengesellschaft

Karlsruhe, den / the 15.10.2014
 Ort / place of issue Datum / Date of issue

Groetschel, i.V. 
 Name / name Unterschrift / signature

Leiter Qualitätsmanagement / Quality Manager, MF-K
 Funktion / function

Diese Erklärung bescheinigt die Übereinstimmung mit den genannten Richtlinien, ist jedoch keine Beschaffenheits- oder Haltbarkeitsgarantie. Die Sicherheitshinweise der mitgelieferten Produktdokumentation sind zu beachten.

Siemens Aktiengesellschaft: Chairman of the Supervisory Board: Gerhard Cromme; Managing Board: Joe Kaeser, Chairman, President and Chief Executive Officer; Roland Busch, Lisa Davis, Klaus Helmrich, Hermann Requardt, Siegfried Russwurm, Ralf P. Thomas; Registered offices: Berlin and Munich, Germany; Commercial registries: Berlin Charlottenburg, HRB 12300, Munich, HRB 6684; WEEE-Reg.-No. DE 23691322

Huemmer, i.V. 
 Name / name Unterschrift / signature

Leiter Entwicklung / Vice President R&D, PD PA CI R&D
 Funktion / function

This declaration certifies the compliance with the indicated directives but does not imply any warranty for properties. The safety instructions of the accompanying product documentation shall be observed.



Konformitätserklärung / Declaration of Conformity

Hersteller/Verantwortlicher: Alfred Hümmel
 Manufacturer/Responsible Person

Anschrift:
 Address Siemens Aktiengesellschaft
 PD PA CI
 Gleichwitzer Str. 555
 DE-90475 Nuremberg
 Bundesrepublik Deutschland

Produkt/Product:
 Typ/Type: Industrial WLAN Access Point EAPN Family
 Modell/Model: **MSN-W1-M12-E2**
MSN-W1-RJ-E2

Einsatzzweck/Intended Use: Wireless Communication

Das bezeichnete Produkt (Modell) entspricht in der gelieferten Ausführung den Bestimmungen der EU-Richtlinie 1999/5/EG, RICHTLINIE DES EUROPÄISCHEN PARLAMENTS UND DES RATES vom 9. März 1999 über Funkanlagen und Telekommunikationsendeinrichtungen und die gegenseitige Anerkennung ihrer Konformität

Die Übereinstimmung des bezeichneten Produkts (Modell) mit den Vorschriften der angewandten Richtlinie(n) wird nachgewiesen durch die vollständige Einhaltung folgender Normen / Vorschriften:


The designated product (model) as delivered is in conformity with the provisions of the EU-Directive 1999/5/EC DIRECTIVE OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity

The conformity of the designated product (model) with the provisions of the applied Directive(s) is proved by full compliance with the following standards / regulations:

Art. 3 (1) a) Schutz der Gesundheit und Sicherheit Harmonisierte Normen / Health and Safety - Harmonised standards:			
Referenznummer Reference number	Version / Ausgabedatum Version / Date of issue	Referenznummer Reference number	Version / Ausgabedatum Version / Date of issue
EN 60950-1+A1+A2+A11+A12	2006/2010/2013/2009/2011	EN 62311	2008
		1999/519/EC	
Art. 3 (1) b) EMV Harmonisierte Normen / EMC Harmonised standards:			
Referenznummer Reference number	Version / Ausgabedatum Version / Date of issue	Referenznummer Reference number	Version / Ausgabedatum Version / Date of issue
ETSI EN 301 489-1	V1.9.2	ETSI EN 301 489-17	V2.2.1
Art. 3 (2) Effiziente Nutzung des Funkspektrums Harmonisierte Normen / Efficient usage of spectrum Harmonised standards:			
Referenznummer Reference number	Version / Ausgabedatum Version / Date of issue	Referenznummer Reference number	Version / Ausgabedatum Version / Date of issue
ETSI EN 300 328	V1.8.1	ETSI EN 301 893	V1.7.1

Siemens Aktiengesellschaft

Karlsruhe, den / the 15.10.2014
 Ort / place of issue Datum / Date of issue

Groetschel, i.V. 
 Name / name Unterschrift / signature

Leiter Qualitätsmanagement / Quality Manager, MF-K
 Funktion / function


 Hümmel, i.V.
 Name / name Unterschrift / signature

Leiter Entwicklung / Vice President R&D, PD PA CI R&D
 Funktion / function

Diese Erklärung bescheinigt die Übereinstimmung mit den genannten Richtlinien, ist jedoch keine Beschaffenheits- oder Haltbarkeitsgarantie. Die Sicherheitshinweise der mitgelieferten Produktdokumentation sind zu beachten.

Siemens Aktiengesellschaft: Chairman of the Supervisory Board: Gerhard Cromme; Managing Board: Joe Kaeser, Chairman, President and Chief Executive Officer; Roland Busch, Lisa Davis, Klaus Helmrich, Hermann Requardt, Siegfried Russwurm, Ralf P. Thomas; Registered offices: Berlin and Munich, Germany; Commercial registries: Berlin Charlottenburg, HRB 12300, Munich, HRB 6684; WEEE-Reg.-No. DE 23691322

This declaration certifies the compliance with the indicated directives but does not imply any warranty for properties. The safety instructions of the accompanying product documentation shall be observed.

ATEX (explosion protection directive)

WARNING

When using SIMATIC NET products in hazardous area zone 2, make absolutely sure that the associated conditions in the following document are adhered to:

"SIMATIC NET Product Information Use of subassemblies/modules in a Zone 2 Hazardous Area".

You will find this document

- on the data medium that ships with some devices.
- on the Internet pages of Siemens Industry Online Support (<http://support.automation.siemens.com/ww>).

Enter the document identification number C234 as the search term.

SIMATIC NET products meet the requirements of the EC directive:94/9/EC "Equipment and Protective Devices for Use in Potentially Explosive Atmospheres".

ATEX classification:

II 3 G Ex nA IIC T4 Gc

KEMA 07ATEX0145 X

The products meet the requirements of the following standards:

- EN 60079-15 (electrical apparatus for potentially explosive atmospheres; Type of protection "n")
- EN 60079-0 (Explosive atmospheres - Part 0: Equipment - General requirements)

You will find the current versions of the standards in the currently valid ATEX certificates.

IECEx

The SIMATIC NET products meet the requirements of explosion protection according to IECEx.

IECEx classification:

Ex nA IIC T4 Gc

DEK 14.0025X

The products meet the requirements of the following standards:

- IEC 60079-15 (Explosive atmospheres - Part 15: Equipment protection by type of protection "n")
- IEC 60079-0 (Explosive atmospheres - Part 0: Equipment - General requirements)

You will find the current versions of the standards in the currently valid IECEx certificates.

FM

The product meets the requirements of the standards:

- Factory Mutual Approval Standard Class Number 3611
- FM Hazardous (Classified) Location Electrical Equipment:
Non Incendive / Class I / Division 2 / Groups A,B,C,D / T4 and
Non Incendive / Class I / Zone 2 / Group IIC / T4

cULus Approval Hazardous Location

cULus Listed I. T. E. FOR HAZ. LOC.

Underwriters Laboratories Inc. complying with

- UL 60950-1 (Information Technology Equipment)
- ANSI/ISA 12.12.01-2007
- CSA C22.2 No. 213-M1987

Approved for use in

Cl. 1, Div. 2, GP A, B, C, D T4

Cl. 1, Zone 2, GP IIC T4

Report no. E240480

FCC approval

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Notice

Changes or modifications made to this equipment not expressly approved by SIEMENS may void the FCC authorization to operate this equipment.

IEEE 802.11b or g operation of this product in the USA is firmware-limited to channels 1 through 11.

3.1 General approvals

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Notice

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. Professional Installation Notice:

To comply with FCC part 15 rules in the United States, the system must be professionally installed to ensure compliance with the Part 15 certification. It is the responsibility of the operator and professional installer to ensure that only certified systems are deployed in the United States. The use of the system in any other combination (such as co-located antennas transmitting the same information) is expressly forbidden.

Notice

For use of DFS channels

- Use of the RCoax Cable Antenna 6XV1875-2D is not permitted in channels which require dynamic frequency selection (DFS).
- Any installation of either a master or a client device within 35 km of a TDWR (Terminal Doppler Weather Radar) location shall be separated by at least 30 MHz (center-to-center) from the TDWR operating frequency.
These devices shall be registered in the industry sponsored WISPA database,

<http://udia.spectrumbridge.com/udia/home.aspx>
(<http://udia.spectrumbridge.com/udia/home.aspx>)

When you open this link, you get the following choices:

- "Search" opens a window with TDWR locations and frequencies.
- "User Signup" allows you to register as user of the database.
- After registering you can Logon and register your WLAN location. Please fill in all required information.

For more information with respect to WISPA database and TWDR locations please consult FCC publication KDB 443999 D01.

CSA Information Technology Equipment

CSA Certification Mark

Canadian Standard Association CSA C22.2 No. 60950-1-03

RSS-247 of Industry Canada

This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

This radio transmitter (IC: 267AA-ELN1V1 for W760/W720 802.11n and IC: 267AA-MSN1V1 for W770/W730 802.11n) has been approved by Industry Canada to operate with the antenna types listed in section 5.6 with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that permitted for successful communication.

3.1 General approvals

That the device for the band 5150-5250 MHz is only for indoor usage to reduce potential for harmful interference to co-channel mobile satellite systems.

Users should also be cautioned to take note that high power radars are allocated as primary users (meaning they have priority) of 5250-5350 MHz and 5650-5850 MHz and these radars could cause interference and/or damage to LE-LAN devices.

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

C-Tick

The product meets the requirements of the AS/NZS 2064 standard (Class A).

Approvals for Argentina

Devices of the SCALANCE W760/W720 series are approved in Argentina under the following certification number:

Certification ID	Certification number
ELN-W1-RJ-E1	CNC: C-13172

Devices of the SCALANCE W770/W730 series are approved in Argentina under the following certification numbers:

Certification ID	Certification number
MSN-W1-RJ-E2	CNC: C-13164
MSN-W1-M12-E2	CNC: C-13163

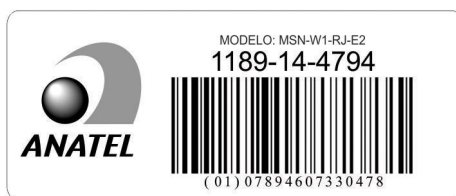
Approval for Brazil

Devices of the SCALANCE W760/W720 series are approved in Brazil under the following certification numbers:



Este equipamento opera em caráter secundário, isto é, não tem direito à proteção contra interferência prejudicial, mesmo de estações do mesmo tipo e não pode causar interferência a sistemas operando em caráter primário.

Devices of the SCALANCE W770/W730 series are approved in Brazil under the following certification numbers:



Este equipamento opera em caráter secundário, isto é, não tem direito à proteção contra interferência prejudicial, mesmo de estações do mesmo tipo e não pode causar interferência a sistemas operando em caráter primário.

KCC Statement (Republic of Korea)

사용자안내문(제5조제1항제1호관련)

기종별	사용자안내문
A 급 기기급 기기 (업무용 방송통신기기)	이 기기는 업무용(A 급)으로 전자파적합등록을 한(A 급)으로 전자파적합등록을 한 기기이오니 판매자 또는 사용자는 이 점을 주의하시기 바라며, 가정외의 지역에서 사용하는 것을 목적으로 합니다.

"당해 무선설비는 전파혼신 가능성이 있으므로 인명안전과 관련된 서비스는 할 수 없음"

Marking for the customs union



EAC (Eurasian Conformity)

Customs union of Russia, Belarus and Kazakhstan

Declaration of the conformity according to the technical regulations of the customs union (TR CU)

Railway approval for the SCALANCE W774-1 M12 EEC

The SCALANCE W774-1 M12 EEC device meets the requirements of the railway standard EN 50155:2007 "Railway Applications - Electronic equipment used on rolling stock".

3.2 National approvals

The following table lists the countries in which the SCALANCE W700 product is approved. The diamond symbol (◆) identifies all countries for which there was no approval at the time these operating instructions were written.

The current status of the approvals can be found on the Internet at the following address:

<http://www.siemens.com/funkzulassungen>

Column	Meaning
Country	Country
Mode	IEEE 802.11 standard and the TPC and / or DFS functionality, where required
CH	Channel
MHz	Frequency
PWR (EIRP)	Maximum permitted effective isotropic radiated power
Use	Permitted use indoors and / or outdoors

Country	Mode	CH	MHz	PWR (EIRP)	Use		
Andorra	11g 11n	1	2412	100 mW	Indoor + outdoor		
Belgium		-	-				
Bosnia and Her- zegovina		13	2472				
Bulgaria	11a 11n TPC	36	5180	200 mW	Indoor only		
Denmark		-	-				
Germany		48	5240				
Estonia	11a 11n DFS + TPC	52	5260	200 mW	Indoor only		
Finland		-	-				
France		64	5320				
Greece		100	5500	1000 mW	Indoor + outdoor		
Great Britain		-	-				
Ireland		116	5580				
Iceland		132	5660	1000 mW	Indoor + outdoor		
Italy						-	
Croatia						140	5700
Latvia							
Liechtenstein							
Lithuania							
Luxembourg							
Malta							
Macedonia							
Monaco							
Montenegro							
Netherlands							
Norway							
Austria							
Poland							
Portugal							
Romania							
San Marino							
Sweden							
Switzerland							
Serbia							
Slovakia							
Slovenia							
Spain							
Czech Republic							
Turkey							
Hungary							
Vatican							
Cyprus							
							

3.2 National approvals

Country	Mode	CH	MHz	PWR (EIRP)	Use
Egypt	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36 - 64	5180 - 5320	200 mW	Indoor only
Angola	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320	1000 mW	Indoor + outdoor
		100	5500		
		-	-		
Argentina	11g 11n	1	2412	1000 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	50 mW	Indoor + outdoor
		-	-	250 mW	Indoor + outdoor
		48	5240		
		52	5260	250 mW	Indoor + outdoor
		-	-		
		64	5320	250 mW	Indoor + outdoor
		100	5500		
		-	-	250 mW	Indoor + outdoor
		120	5600		
		132	5660	250 mW	Indoor + outdoor
		-	-		
		140	5700	1000 mW	Indoor + outdoor
		149	5745		
		-	-		
		165	5825		

Country	Mode	CH	MHz	PWR (EIRP)	Use
Australia New Zealand 	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320		
	11a 11n TPC	149	5745	400 mW	Indoor + outdoor
		-	-		
		165	5825		
Bahrain	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320		
	11a 11n TPC	149	5745	2000 mW	Indoor + outdoor
		-	-		
		165	5825		
Belarus	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TCP	36	5180	100 mW	Indoor + outdoor
		-	-		
		48	5240		
	11a 11n TCP + DFS	52	5260	100 mW	Indoor + outdoor
		-	-		
		64	5320		
		132	5660	100 mW	Indoor + outdoor
		-	-		
		140	5700		

3.2 National approvals

Country	Mode	CH	MHz	PWR (EIRP)	Use
Brazil	11g 11n	1	2412	4000 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		64	5320	1000 mW	Indoor + outdoor
		100	5500		
		-	-	4000 mW	Indoor + outdoor
		140	5700		
Chile	11g 11n	1	2412	100 mW	Indoor only
		-	-		
		13	2472		
	11a 11n TPC	36	5180	100 mW	Indoor only
		-	-		
	11a 11n DFS+TPC	48	5240	100 mW	Indoor only
		52	5260		
		-	-	100 mW	Indoor only
		64	5320		
China	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	149	5745	2000 mW	Indoor + outdoor
Ivory Coast	11g 11n	-	-		
		13	2472		
		36	5180	200 mW	Indoor only
	11a 11n TPC	-	-		
		48	5240	200 mW	Indoor only
	11a 11n DFS + TPC	52	5260		
		-	-	1000 mW	Indoor + outdoor
		64	5320		
		100	5500	1000 mW	Indoor + outdoor
		-	-		
		116	5580	1000 mW	Indoor + outdoor
		132	5660		
		-	-	1000 mW	Indoor + outdoor
		140	5700		

Country	Mode	CH	MHz	PWR (EIRP)	Use
Guatemala	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		11	2462		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	400 mW	Indoor + outdoor
		-	-		
		64	5320	400 mW	Indoor + outdoor
		100	5500		
		-	-	400 mW	Indoor + outdoor
		116	5580		
		132	5660	400 mW	Indoor + outdoor
		-	-		
		140	5700	400 mW	Indoor + outdoor
	11a 11n TPC	149	5745		
		-	-		
		165	5825		
Hong Kong	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320	1000 mW	Indoor + outdoor
		100	5500		
		-	-	1000 mW	Indoor + outdoor
		116	5580		
		132	5660	1000 mW	Indoor + outdoor
		-	-		
		140	5700		

3.2 National approvals

Country	Mode	CH	MHz	PWR (EIRP)	Use
India	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320		
	11a 11n TPC	149	5745	200 mW	Indoor only
		-	-		
		165	5825		
Indonesia ♦	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	149	5745	400 mW	Indoor + outdoor
		-	-		
		161	5805		
Japan 	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a TPC	8	5040	200 mW	Indoor + outdoor
		-	-		
		16	5080		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320	200 mW	Indoor + outdoor
		100	5500		
	11a TPC	-	-	200 mW	Indoor + outdoor
		140	5700		
		184	4920		
		-	-		
		196	4980		

Country	Mode	CH	MHz	PWR (EIRP)	Use
Kazakhstan	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	100 mW	Indoor + outdoor
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	100 mW	Indoor + outdoor
		-	-		
		64	5320	100 mW	Indoor + outdoor
		132	5660		
-		-			
140	5700				
Qatar	11g 11n	1	2412	100 mW	Indoor only
		-	-		
		13	2472		
	11a 11n	149	5745	100 mW	Indoor only
		-	-		
165		5825			
Korea 	11g 11n	1	2412	400 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	149	5745	400 mW	Indoor + outdoor
		-	-		
161		5805			
Kuwait	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	100 mW	Indoor + outdoor
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	100 mW	Indoor + outdoor
		-	-		
		64	5320		
Macau	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	149	5745	100 mW	Indoor + outdoor
		-	-		
		161	5805		

3.2 National approvals

Country	Mode	CH	MHz	PWR (EIRP)	Use
Madagascar	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320	1000 mW	Indoor + outdoor
		100	5500		
		-	-		
		116	5580	1000 mW	Indoor + outdoor
		132	5660		
		-	-		
		140	5700	400 mW	Indoor + outdoor
	11a 11n TPC	149	5745		
		-	-		
		165	5825		
Malaysia	11g 11n	1	2412	200 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n DFS + TPC	56	5280	200 mW	Indoor only
		-	-		
		64	5320	1000 mW	Indoor + outdoor
	11a 11n TPC	149	5745		
		-	-		
		165	5825		
Mexico	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		11	2462		
	11a 11n TPC	36	5180	1000 mW	Indoor only
		-	-		
		64	5320	1000 mW	Indoor + outdoor
		149	5745		
		-	-	100 mW	Indoor + outdoor
		165	5825		
Pakistan	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	149	5745	100 mW	Indoor + outdoor
		-	-		
		165	5825		

Country	Mode	CH	MHz	PWR (EIRP)	Use
Russia	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	100 mW	Indoor + outdoor
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	100 mW	Indoor + outdoor
		-	-		
		64	5320		
Saudi Arabia	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320	200 mW	Indoor + outdoor
		100	5500		
		-	-		
Singapore Philippines	11b 11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor + outdoor
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	200 mW	Indoor + outdoor
		-	-		
		64	5320	1000 mW	Indoor + outdoor
		100	5500		
		-	-		
		116	5580	1000 mW	Indoor + outdoor
		-	-		
	11a 11n TPC	132	5660	1000 mW	Indoor + outdoor
		-	-		
		140	5700		
		149	5745	1000 mW	Indoor + outdoor
		-	-		
		165	5825		

3.2 National approvals

Country	Mode	CH	MHz	PWR (EIRP)	Use
South Africa 	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		- 48	- 5240		
	11a 11n DFS+TPC	52	5260	200 mW	Indoor only
		- 64	- 5320		
		100	5500	1000 mW	Indoor + outdoor
		- 116	- 5580		
		132	5660		
Taiwan ♦ 	11g 11n	- 140	- 5700	1000 mW	Indoor + outdoor
		1	2412	100 mW	Indoor + outdoor
		2	2417	200 mW	Indoor + outdoor
		- 10	- 2457		
	11a 11n DFS+TPC	11	2462	100 mW	Indoor + outdoor
		52	5260	400 mW	Indoor only
		- 64	- 5320		
		100	5500	400 mW	Indoor + outdoor
		- 116	- 5580		
		132	5660	400 mW	Indoor + outdoor
		- 140	- 5700		
	11a 11n TPC	149	5745	400 mW	Indoor + outdoor
		- 165	- 5825		
Venezuela	11g 11n	1	2412	1000 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		- 48	- 5240		
	11a 11n DFS+TPC	52	5260	1000 mW	Indoor only
		- 64	- 5320		
	11a 11n TPC	149	5745	4000 mW	Indoor + outdoor
		- 165	- 5825		

Country	Mode	CH	MHz	PWR (EIRP)	Use
United Arab Emirates	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS+TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320	1000 mW	Indoor only
		100	5500		
		-	-	1000 mW	Indoor only
		116	5580		
		132	5660	1000 mW	Indoor only
		-	-		
		140	5700		
Bahamas Canada Colombia Peru Puerto Rico Thailand USA Uruguay 	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		11	2462		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS + TPC	52	5260	400 mW	Indoor + outdoor
		-	-		
		64	5320	400 mW	Indoor + outdoor
		100	5500		
		-	-	400 mW	Indoor + outdoor
		116	5580		
		132	5660	400 mW	Indoor + outdoor
		-	-		
		140	5700		
	11a 11n TPC	149	5745	400 mW	Indoor + outdoor
		-	-		
		165	5825		

3.2 National approvals

Country	Mode	CH	MHz	PWR (EIRP)	Use
Vietnam	11g 11n	1	2412	100 mW	Indoor + outdoor
		-	-		
		13	2472		
	11a 11n TPC	36	5180	200 mW	Indoor only
		-	-		
		48	5240		
	11a 11n DFS+TPC	52	5260	200 mW	Indoor only
		-	-		
		64	5320	1000 mW	Indoor + outdoor
		100	5500		
		-	-	1000 mW	Indoor + outdoor
		116	5580		
	11a 11n TPC	132	5660	1000 mW	Indoor + outdoor
		-	-		
		140	5700	400 mW	Indoor + outdoor
		149	5745		
		-	-	400 mW	Indoor + outdoor
		165	5825		

Index

A

Approvals, 7, 38, 68

C

CE conformity, 68

N

National approvals, 21, 50, 78

